

RF Test Report

Applicant : Ocean Star Electronics Limited

Product Type : Bluetooth Speaker with Chromecast built-in

Trade Name : TOSHIBA

Model Number : TY-GC1000

Test Specification : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013

Receive Date : Nov. 10, 2016

Test Period : Nov. 16, 2016 ~ Jul. 03, 2017

Issue Date : Sep. 08, 2017

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +86-3-2710188 / Fax : +86-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
Test Firm MRA designation number: TW0010

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Revised By
00	Aug. 25, 2017	Initial Issue	Nina Lin
01	Sep. 08, 2017	Revised report information.	Nina Lin

Verification of Compliance

Issued Date: Sep. 08, 2017

Applicant : Ocean Star Electronics Limited

Product Type : Bluetooth Speaker with Chromecast built-in

Trade Name : TOSHIBA

Model Number : TY-GC1000

FCC ID : LMZ-GC1000

EUT Rated Voltage : DC 18V, 1.5A

Test Voltage : 120 Vac / 60 Hz

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +86-3-2710188 / Fax : +86-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

<http://www.atl-lab.com.tw/e-index.htm>

A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : Fly Lu Reviewed By : Eric Ou Yang
(Manager) (Fly Lu) (Testing Engineer) (Eric Ou Yang)



TABLE OF CONTENTS

1	General Information.....	5
1.1.	Summary of Test Result.....	5
1.2.	Measurement Uncertainty.....	5
2	EUT Description	6
3	Test Methodology	8
3.1.	Mode of Operation	8
3.2.	EUT Exercise Software	14
3.3.	Configuration of Test System Details	14
3.4.	Test Site Environment	15
4	Test Results.....	16
4.1.	AC Power Conducted Emission Measurement	16
4.2.	Test Procedure	17
4.3.	Transmitter Radiated Emissions Measurement.....	20
4.4.	Maximum Conducted Output Power Measurement.....	140
4.5.	26dB RF Bandwidth Measurement.....	147
4.6.	6dB RF Bandwidth Measurement.....	159
4.7.	Peak Power Spectral Density Measurement	164
4.8.	Frequency Stability Measurement	184
4.9.	Antenna Requirement	187



1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
FCC			
15.407(b)(6) 15.207	AC Power Conducted Emission	PASS	---
15.407(b) 15.205 / 15.209	Transmitter Radiated Emissions	PASS	---
15.407(a)	Maximum Conducted Output Power	PASS	---
15.407(a)	26dB RF Bandwidth	Reference	---
15.407(e)	6dB RF Bandwidth	PASS	----
15.407(a)	Peak Power Spectral Density	PASS	---
15.407(g)	Frequency Stability	PASS	---
15.407(a) 15.203	Antenna Requirement	PASS	---

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	9kHz ~ 150KHz	2.7
	150kHz ~ 30MHz	2.7
Radiated Emission	9kHz ~ 30MHz	1.7
	30MHz ~ 1000MHz	5.7
	1000MHz ~ 18000MHz	5.5
	18000MHz ~ 26500MHz	4.8
	26500MHz ~ 40000MHz	4.8
Conducted Output Power		+0.27 dB / -0.28 dB
RF Bandwidth		4.96%
Power Spectral Density		+0.71 dB / -0.77 dB
Frequency Stability		+ 2.212 x 10 ⁻⁷ % / - 2.170 x 10 ⁻⁷
Duty Cycle		1.06%
Time Occupancy		1.40%



2 EUT Description

Applicant	Ocean Star Electronics Limited Unit 15, 8/F., Wah Wai Center, 38-40 Au Pui Wan Street, Fo Tan, Hong Kong		
Manufacturer	Ocean Star Electronics Limited Unit 15, 8/F., Wah Wai Center, 38-40 Au Pui Wan Street, Fo Tan, Hong Kong		
Product Type	Bluetooth Speaker with Chromecast built-in		
Trade Name	TOSHIBA		
Model No.	TY-GC1000		
FCC ID	LMZ-GC1000		
Operate Frequency	Frequency Band		Frequency Range (MHz)
	IEEE 802.11a	U-NII Band I	5180 – 5240
		U-NII Band II-A	5260 – 5320
		U-NII Band II-C	5500 – 5700
		U-NII Band III	5745 – 5825
	IEEE 802.11n 5GHz 20 MHz / IEEE 802.11ac 20 MHz	U-NII Band I	5180 – 5240
		U-NII Band II-A	5260 – 5320
		U-NII Band II-C	5500 – 5700
		U-NII Band III	5745 – 5825
	IEEE 802.11n 5GHz 40 MHz / IEEE 802.11ac 40 MHz	U-NII Band I	5190 – 5230
		U-NII Band II-A	5270 – 5310
		U-NII Band II-C	5510 – 5670
		U-NII Band III	5755 – 5795
	IEEE 802.11ac 80 MHz	U-NII Band I	5210
		U-NII Band II-A	5290
		U-NII Band II-C	5530
		U-NII Band III	5775
Modulation Type	OFDM		
Equipment Type	Client devices		
Antenna information	Model	Type	Max. Gain (dBi)
	GY 9000	PCB Antenna	4
Antenna Delivery	Reference section 3.1		
Frequency stability specification	± 20 ppm		
Operate Temp. Range	0 ~ +35 °C		



Frequency Band		RF Output Power (W)
IEEE 802.11a	U-NII Band I	0.033
	U-NII Band II-A	0.031
	U-NII Band II-C	0.030
	U-NII Band III	0.030
IEEE 802.11ac 20 MHz	U-NII Band I	0.024
	U-NII Band II-A	0.022
	U-NII Band II-C	0.022
	U-NII Band III	0.023
IEEE 802.11ac 40 MHz	U-NII Band I	0.019
	U-NII Band II-A	0.018
	U-NII Band II-C	0.018
	U-NII Band III	0.018
IEEE 802.11ac 80 MHz	U-NII Band I	0.011
	U-NII Band II-A	0.011
	U-NII Band II-C	0.011
	U-NII Band III	0.010

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit mode
Mode 2: IEEE 802.11a Continuous TX mode
Mode 3: IEEE 802.11ac 20MHz Continuous TX mode
Mode 4: IEEE 802.11ac 40MHz Continuous TX mode
Mode 5: IEEE 802.11ac 80MHz Continuous TX mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

Equipment Type	
Outdoor access point	---
Indoor access point	---
Fixed point-to-point access points	---
Client devices	V

Test Mode	ANT-1	ANT-2
Mode 2	V	V
Mode 3	V	V
Mode 4	V	V
Mode 5	V	V


Test Mode	Antenna Delivery	Data Rate	Band	Test Channel
Mode 2	1TX /1RX (Diversity)	6M	U-NII Band I	36, 40, 48
			U-NII Band II-A	52, 56, 64
			U-NII Band II-C	100, 112, 140
			U-NII Band III	149, 157,,165
Mode 3	1TX /1RX (Diversity)	6.5M	U-NII Band I	36, 40, 48
			U-NII Band II-A	52, 56, 64
			U-NII Band II-C	100, 112, 140
			U-NII Band III	149, 157,,165
Mode 4	1TX /1RX (Diversity)	13.5M	U-NII Band I	38, 46
			U-NII Band II-A	54, 62
			U-NII Band II-C	102, 110, 134
			U-NII Band III	151,159
Mode 5	1TX /1RX (Diversity)	29.3M	U-NII Band I	42
			U-NII Band II-A	58
			U-NII Band II-C	106
			U-NII Band III	155

Duty cycle



Test Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
Mode 2	5180.0	20.000	20.000	1.000	0.000	0.010
Mode 3	5180.0	20.000	20.000	1.000	0.000	0.010
Mode 4	5190.0	20.000	20.000	1.000	0.000	0.010
Mode 5	5210.0	20.000	20.000	1.000	0.000	0.010





Duty Cycle Graphs

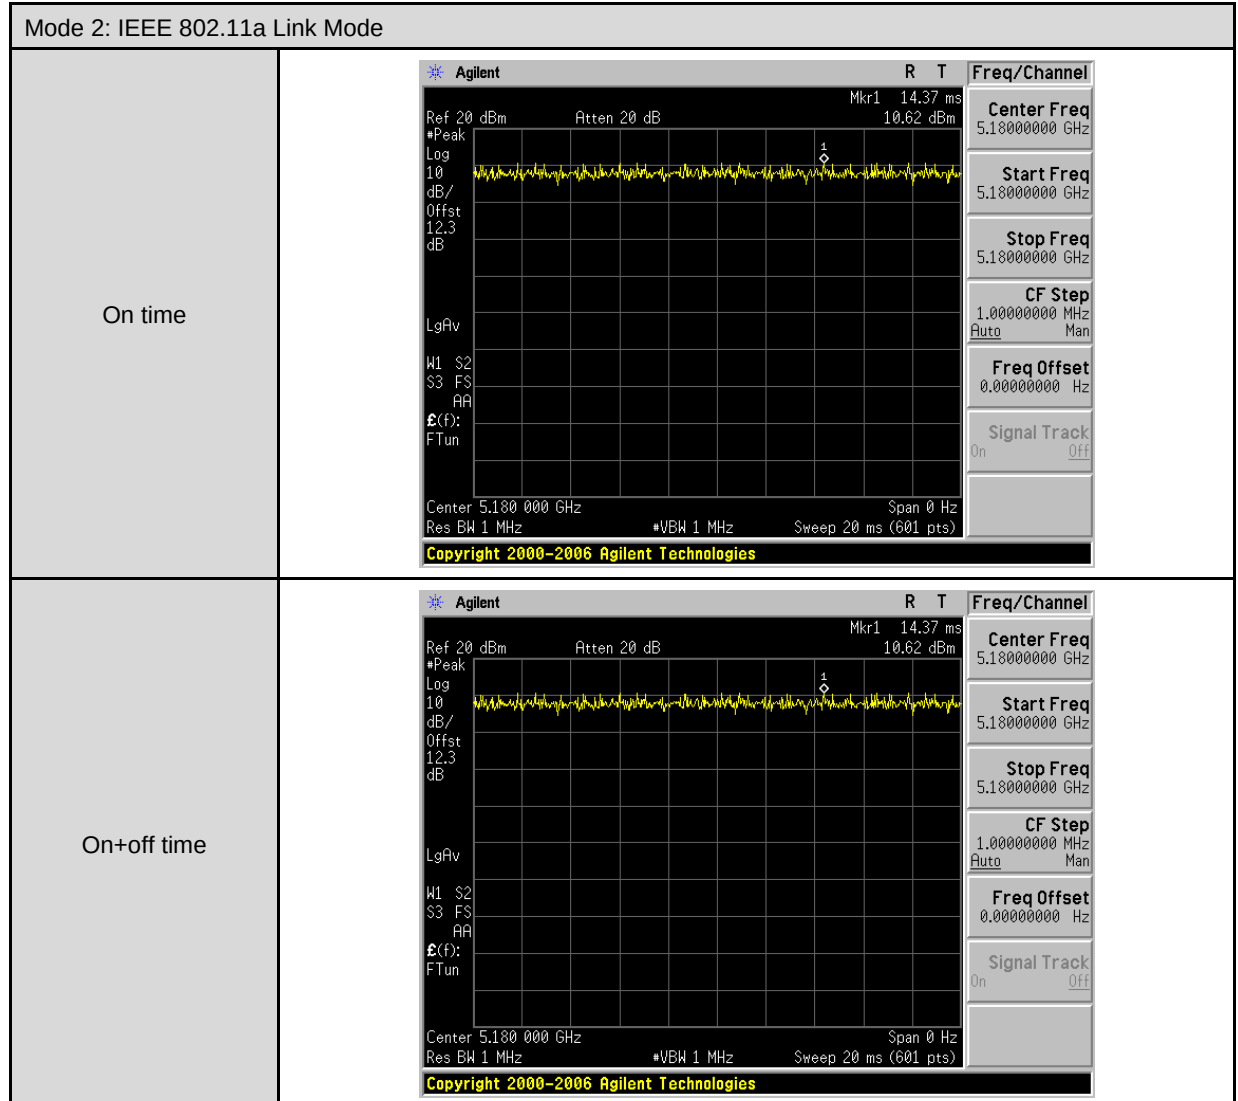


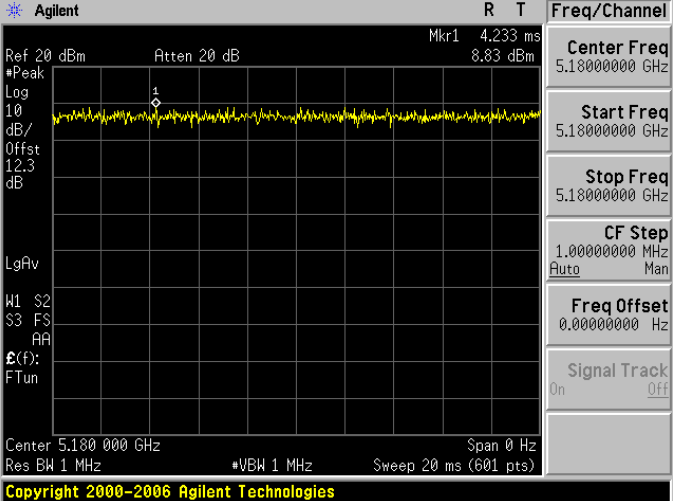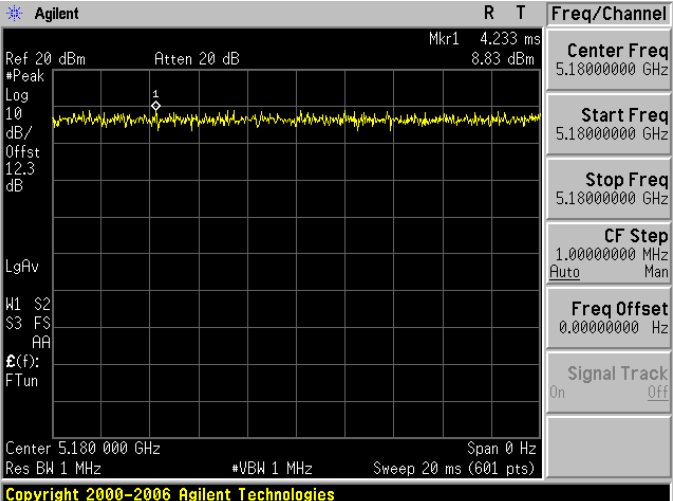

Mode 3: IEEE 802.11ac 20MHz Link Mode		
On time		
On+off time		

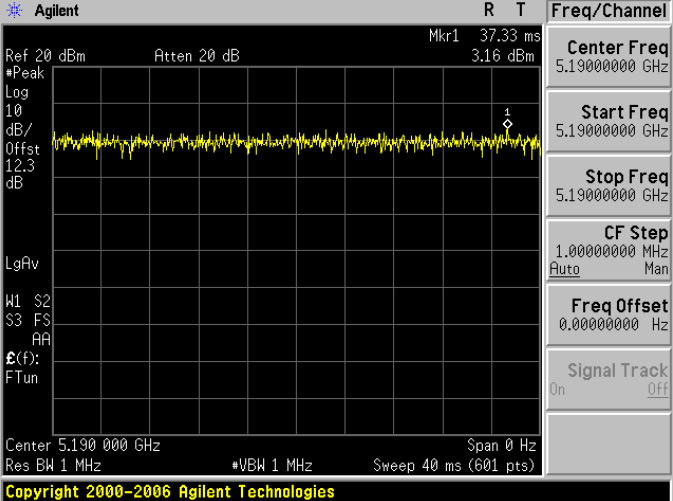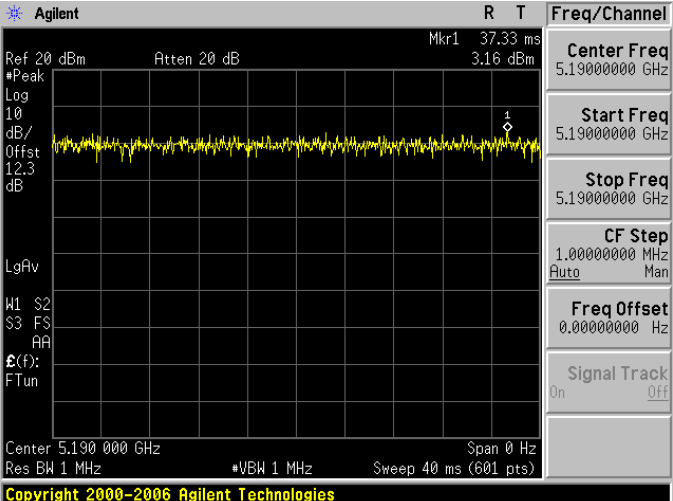

Mode 4: IEEE 802.11ac 40MHz Link Mode		
On time		
On+off time		

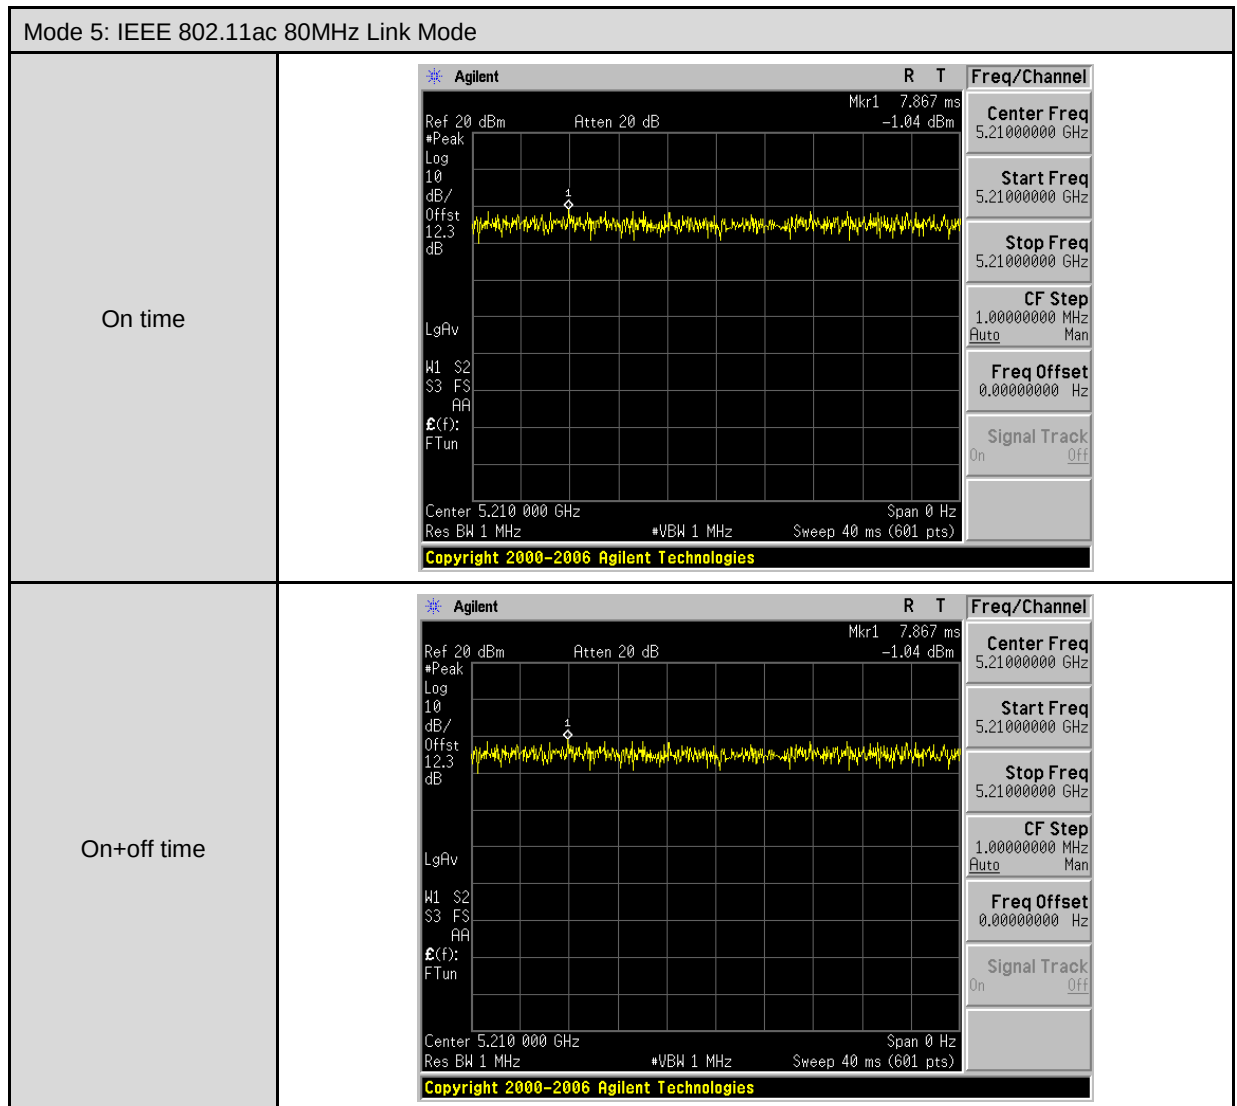

3.2. EUT Exercise Software


The EUT is operated in the engineering mode to fix the TX frequency for the purposes of measurement. According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

1.	Setup the EUT shown on 3.3.
2.	Turn on the power of all equipment.
3.	EUT run test program.


Measurement Software	
1	EZ-EMC Ver. ATL-03A1-1
2	EZ-EMC Ver ATL-ITC-3A1-1

3.3. Configuration of Test System Details

Conducted Emission

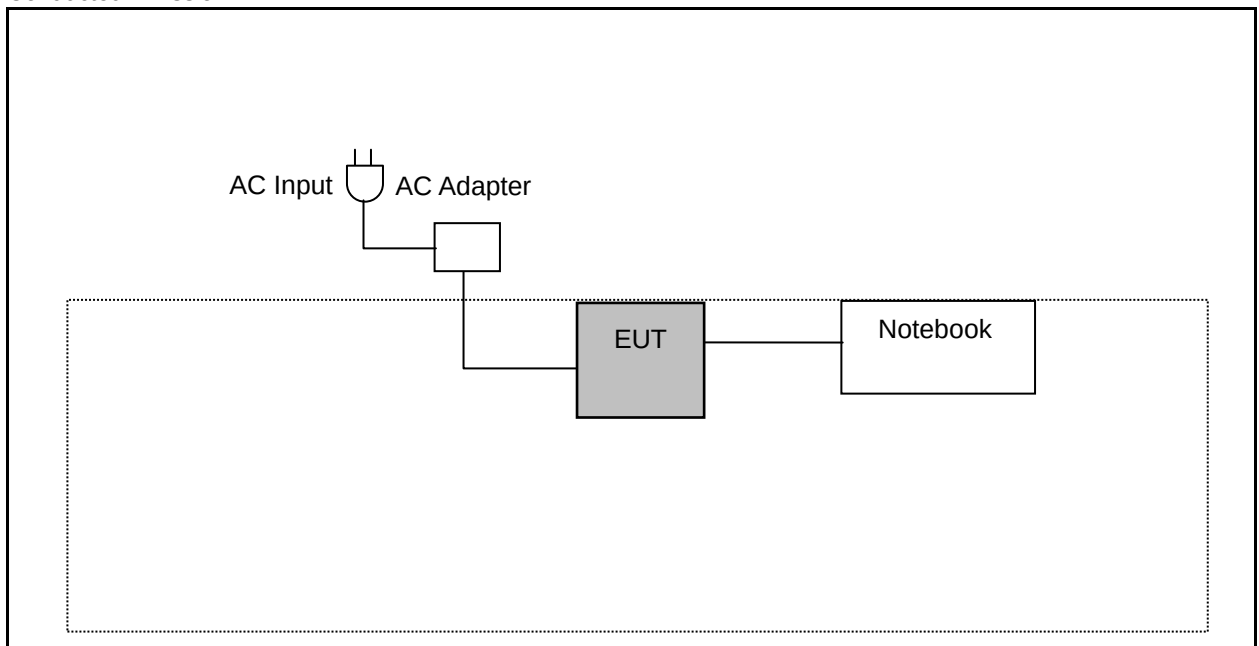

Radiated Emissions

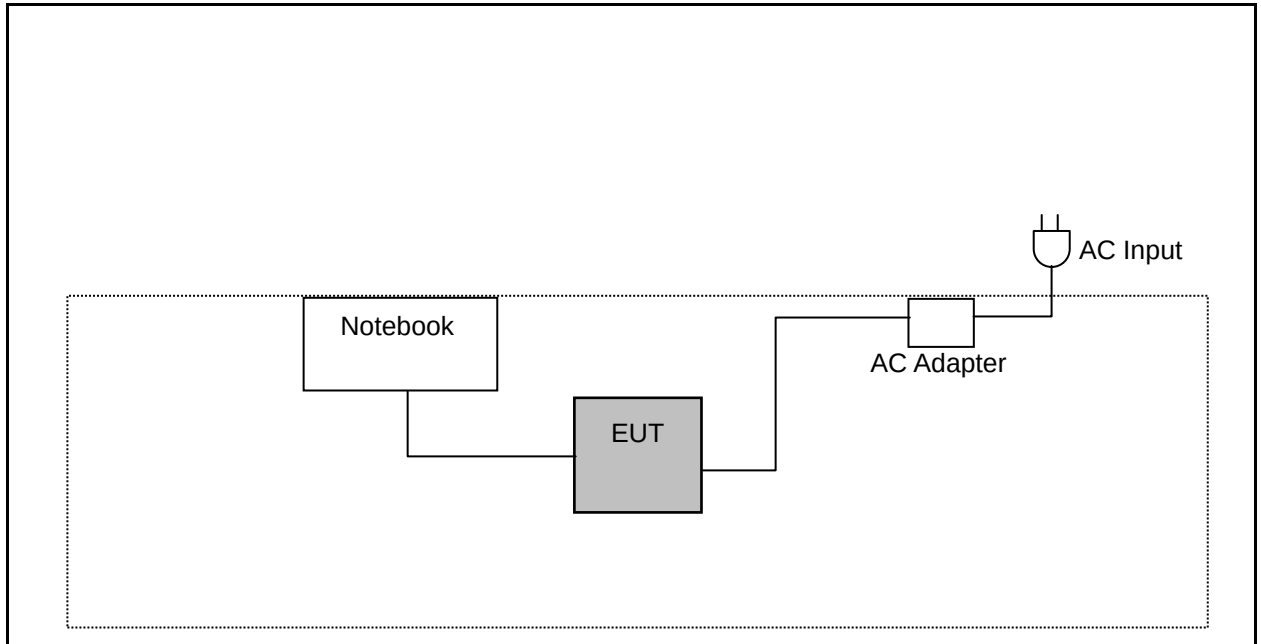

3.4. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

4 Test Results

4.1. AC Power Conducted Emission Measurement

■ Limit


Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	05/18/2017	1 year
LISN	R&S	ENV216	101040	04/01/2017	1 year
LISN	R&S	ENV216	101041	03/15/2017	1 year
RF Cable	Woken	00100D1380194M	TE-02-02	05/19/2017	1 year
Test Site	ATL	TE02	TE02	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

■ Test Setup

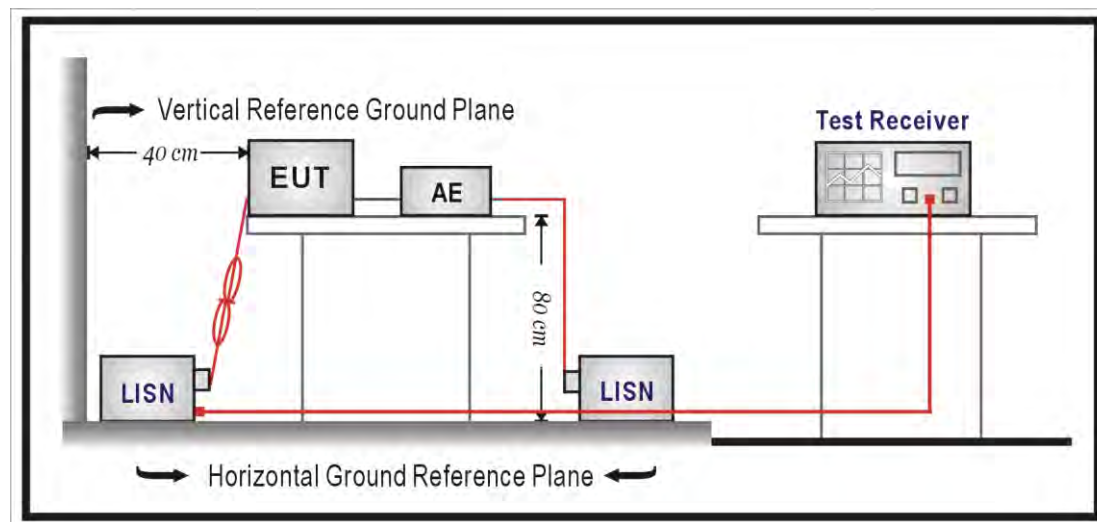

4.2. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a $50\Omega // 50\mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\Omega // 50\mu\text{H}$ coupling impedance with 50ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150kHz to 30MHz then quasi-peak and average measurement was unnecessary.


The AMN shall be placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0,8 m from the AMN. If the mains power cable is longer than 1m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4m. All of interconnecting cables that hang closer than 40cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1m. All 50 Ω ports of the LISN shall be resistively terminated into 50 Ω loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.



■ Test Result

Standard:	FCC Part 15.407	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
		Date:	06/27/2017
Description:			

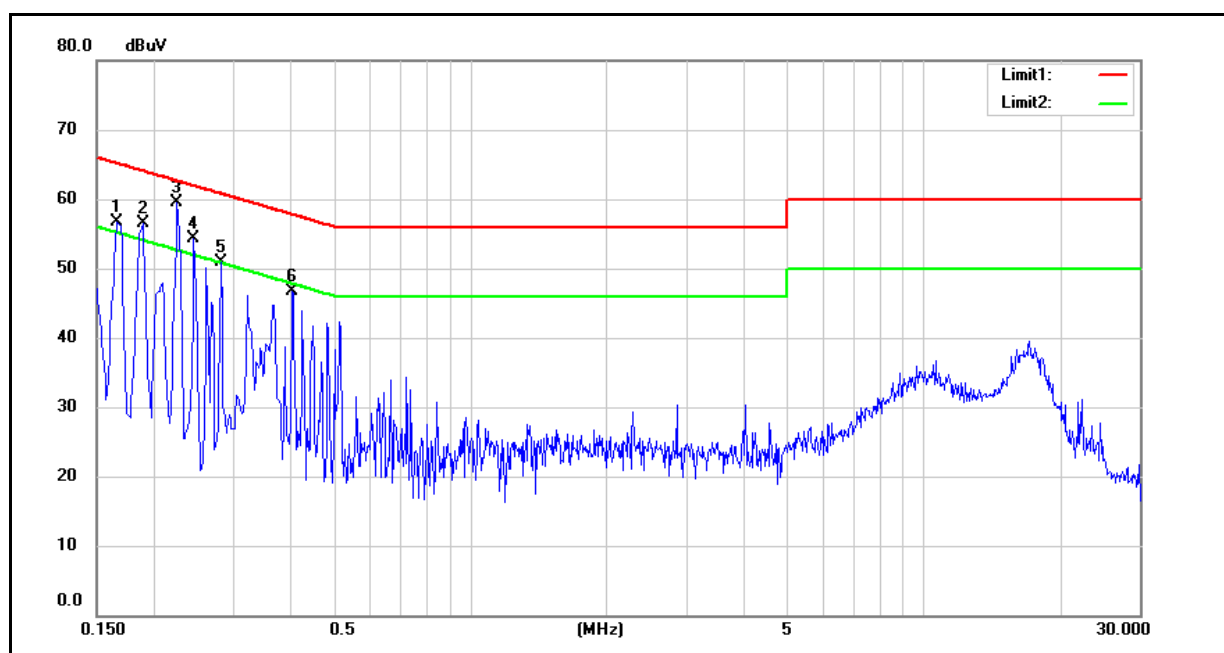


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1660	40.45	15.40	9.64	50.09	25.04	65.16	55.16	-15.07	-30.12	Pass
2	0.1900	38.18	13.92	9.64	47.82	23.56	64.04	54.04	-16.22	-30.48	Pass
3	0.2260	34.33	9.71	9.64	43.97	19.35	62.60	52.60	-18.63	-33.25	Pass
4	0.2460	33.00	7.45	9.64	42.64	17.09	61.89	51.89	-19.25	-34.80	Pass
5	0.2820	30.38	7.17	9.65	40.03	16.82	60.76	50.76	-20.73	-33.94	Pass
6	0.4060	23.08	4.30	9.66	32.74	13.96	57.73	47.73	-24.99	-33.77	Pass

Note: 1. Result = Correction factor + Reading

2. Correction factor = Antenna Factor + Cable loss – Pre-Amplifier gain.



Standard:	FCC Part 15.407	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
		Date:	06/27/2017
Description:			

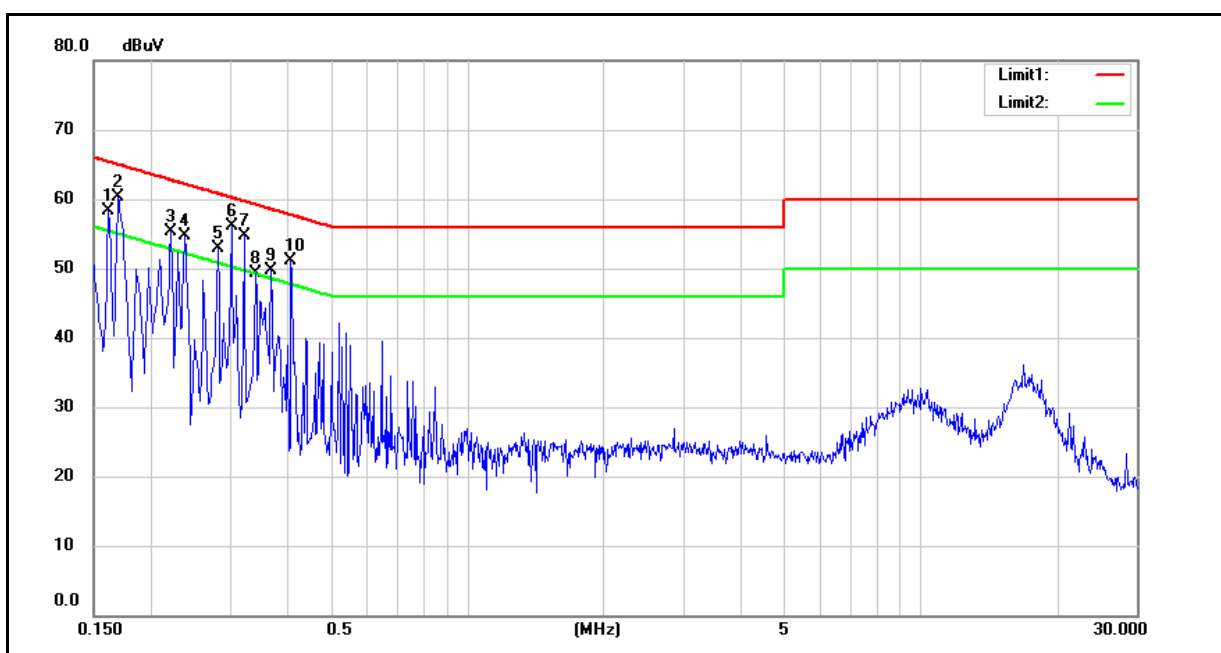

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1620	40.64	13.73	9.64	50.28	23.37	65.36	55.36	-15.08	-31.99	Pass
2	0.1700	39.57	12.57	9.64	49.21	22.21	64.96	54.96	-15.75	-32.75	Pass
3	0.2220	34.55	9.26	9.64	44.19	18.90	62.74	52.74	-18.55	-33.84	Pass
4	0.2380	33.56	9.00	9.64	43.20	18.64	62.17	52.17	-18.97	-33.53	Pass
5	0.2820	30.36	6.83	9.65	40.01	16.48	60.76	50.76	-20.75	-34.28	Pass
6	0.3020	30.04	8.28	9.65	39.69	17.93	60.19	50.19	-20.50	-32.26	Pass
7	0.3220	27.82	10.79	9.65	37.47	20.44	59.66	49.66	-22.19	-29.22	Pass
8	0.3420	28.28	15.84	9.65	37.93	25.49	59.15	49.15	-21.22	-23.66	Pass
9	0.3700	25.18	12.26	9.65	34.83	21.91	58.50	48.50	-23.67	-26.59	Pass
10	0.4100	22.25	4.86	9.66	31.91	14.52	57.65	47.65	-25.74	-33.13	Pass

Note: 1. Result = Correction factor + Reading

2. Correction factor = Antenna Factor + Cable loss – Pre-Amplifier gain.

4.3. Transmitter Radiated Emissions Measurement

■ Limit

(1)Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(a)For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(b)For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(c)For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(d)For transmitters operating in the 5.725-5.85 GHz band:

(i)All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(2)Limits of Radiated Emission Measurement

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequency Range (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	10	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note: 1. The lower limit shall apply at the transition frequencies.

2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.


Test Instruments

3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
RF Pre-selector	Agilent	N9039A	MY46520256	04/24/2017	1 year
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/08/2016	1 year
				04/24/2017	1 year
Pre Amplifier	Agilent	8449B	3008A02237	10/11/2016	1 year
Pre Amplifier	Agilent	8447D	2944A11119	01/12/2017	1 year
Broadband Antenna	Schwarzbeck	VULB9168	416	10/13/2016	1 year
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/06/2016	1 year
				06/22/2017	1 year
Horn Antenna (18~40GHz)	ETS	3116	86467	09/05/2016	1 year
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	01/26/2017	1 year
Microwave Cable	EMCI	EMC102-KM-KM-14000	151001	02/23/2016	1 year
				02/20/2017	1 year
Microwave Cable	EMCI	EMC-104-SM-SM-14000	140202	02/23/2016	1 year
				02/20/2017	1 year
Microwave Cable	EMCI	EMC104-SM-SM-600	140301	02/23/2016	1 year
				02/20/2017	1 year
Test Site	ATL	TE01	888001	08/29/2016	1 year


Note: N.C.R. = No Calibration Request.

Setup


9kHz ~ 30MHz

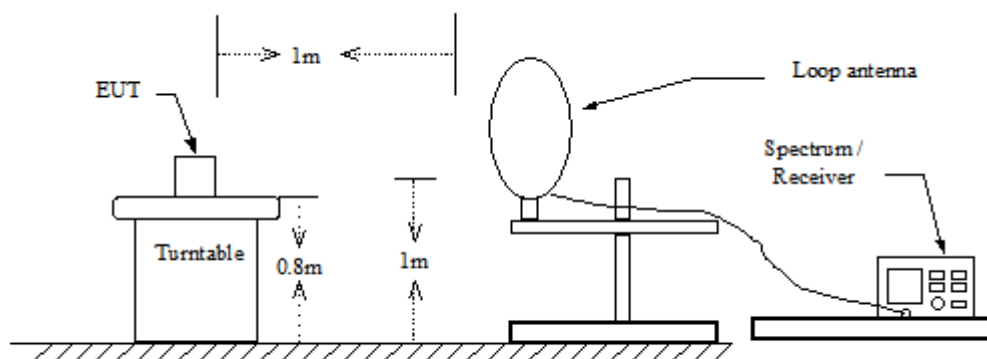

30MHz ~ 1GHz

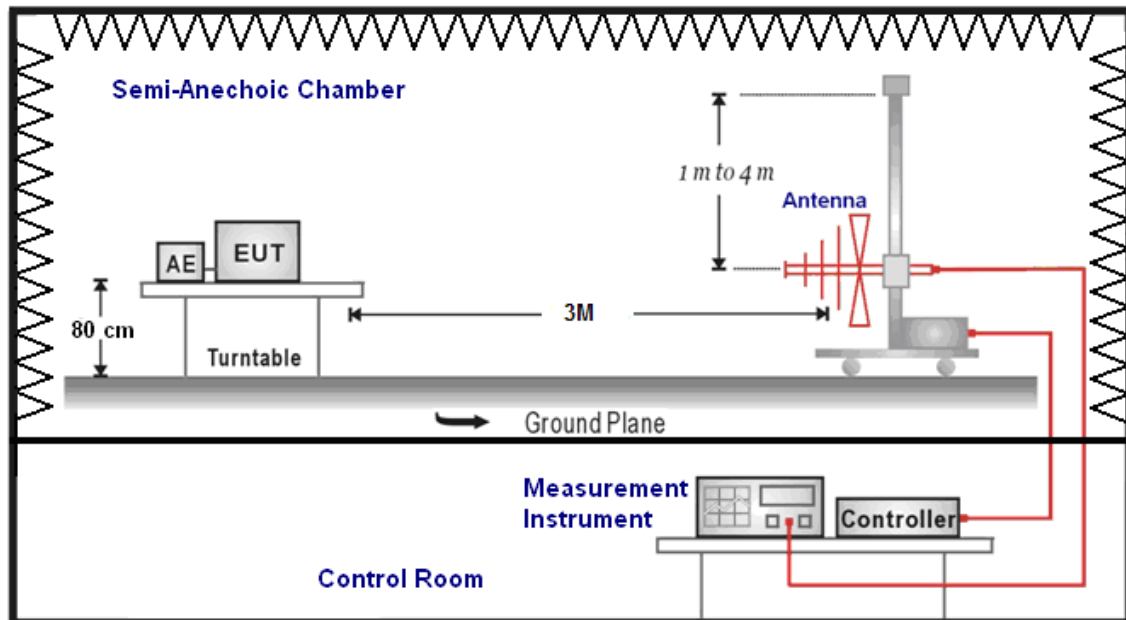

Above 1GHz

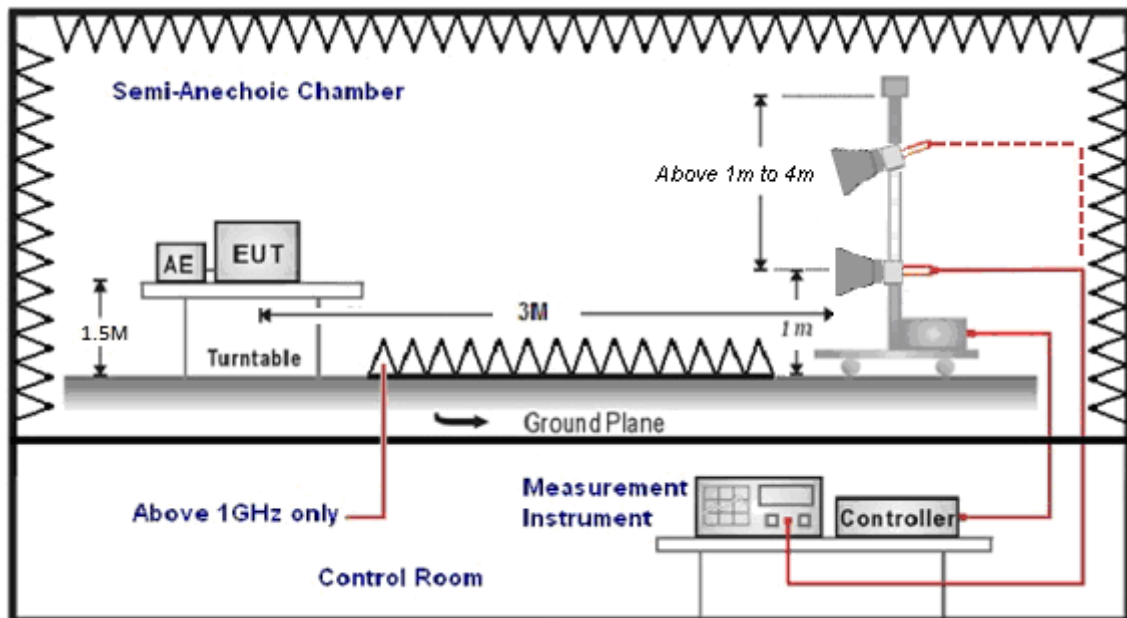

■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height (below 1GHz use 0.8m turntable / above 1GHz use 1.5m turntable), top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 40 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For restricted measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle > 0.98 / 1/T for average measurements when Duty cycle < 0.98.

For out of band measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Trilog-Broadband Antenna at 3 Meter and the ETS-Lindgren Double-Ridged Waveguide Horn antenna Schwarzbeck Mess-Elektronik Broadband Horn Antenna was used in frequencies 1 – 40 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) + AF (dBuV) + CL (dBuV) - Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV) - Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Measuring Instruments and setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000MHz
Stop Frequency	40GHz
RBW/VBW(Emission in restricted band)	1MHz / 3MHz for Peak 1MHz / (1/T) for Average
RBW/VBW(Emission in non-restricted band)	1MHz / 3MHz for Peak



■ Test Result

Below 1GHz

Standard:		FCC Part 15.407		Test Distance:		3m	
Test item:		Harmonic		Power:		AC 120V/60Hz	
Test Mode:		Mode 1		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
				Date:		07/03/2017	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
221.0900	46.99	-6.06	40.93	46.00	-5.07	QP	H
270.5600	43.86	-3.68	40.18	46.00	-5.82	QP	H
320.0300	42.35	-2.38	39.97	46.00	-6.03	QP	H
500.4500	32.62	1.21	33.83	46.00	-12.17	QP	H
712.8800	29.72	5.33	35.05	46.00	-10.95	QP	H
934.0400	28.22	9.56	37.78	46.00	-8.22	QP	H
221.0900	46.98	-6.06	40.92	46.00	-5.08	QP	V
258.9200	42.89	-4.31	38.58	46.00	-7.42	QP	V
453.8900	34.92	0.28	35.20	46.00	-10.80	QP	V
579.9900	31.81	2.91	34.72	46.00	-11.28	QP	V
811.8200	29.25	7.18	36.43	46.00	-9.57	QP	V
983.5100	29.53	10.27	39.80	54.00	-14.20	QP	V


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Above 1GHz

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5180MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/10/2016
Ant.Polar.:	Horizontal		

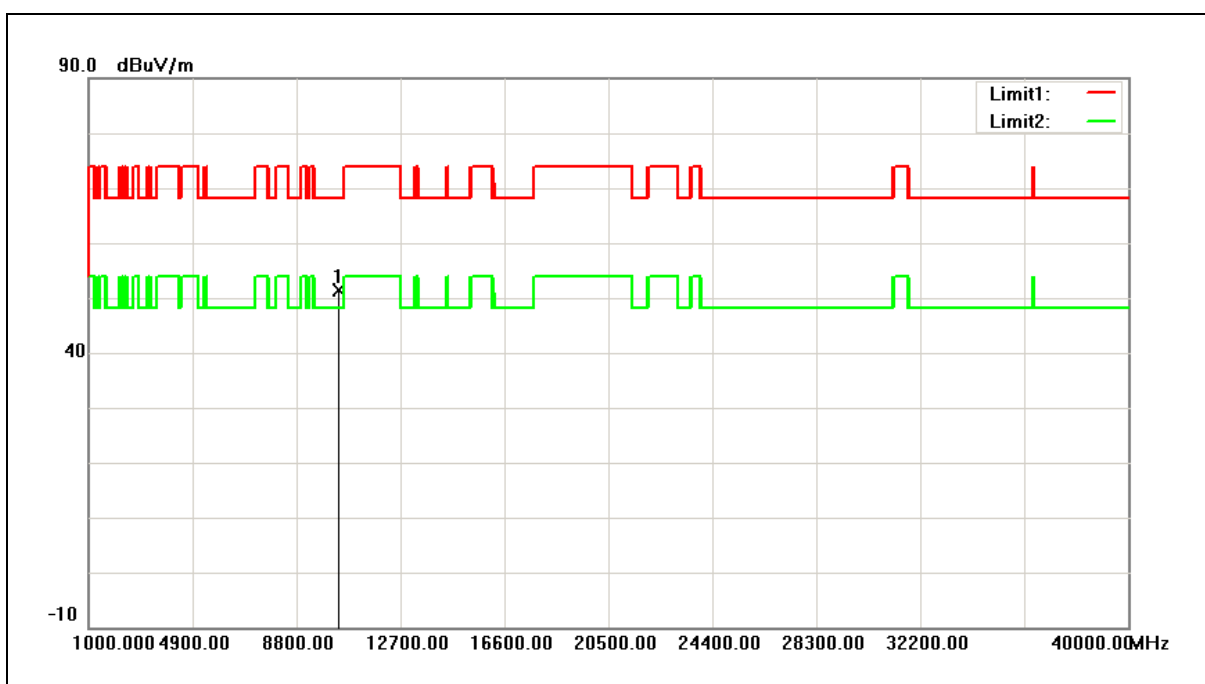

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	46.35	4.97	51.32	68.20	-16.88	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5180MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/10/2016
Ant.Polar.:	Vertical		

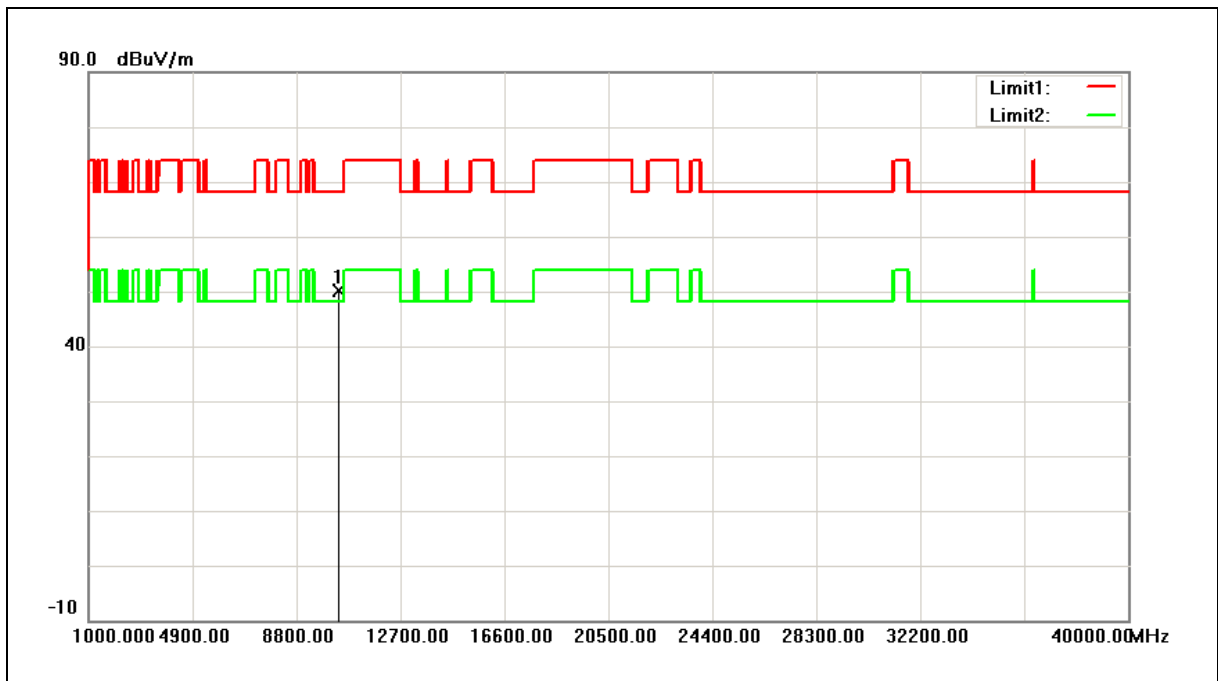


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	45.20	4.97	50.17	68.20	-18.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5200MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/10/2016
Ant.Polar.:	Horizontal		

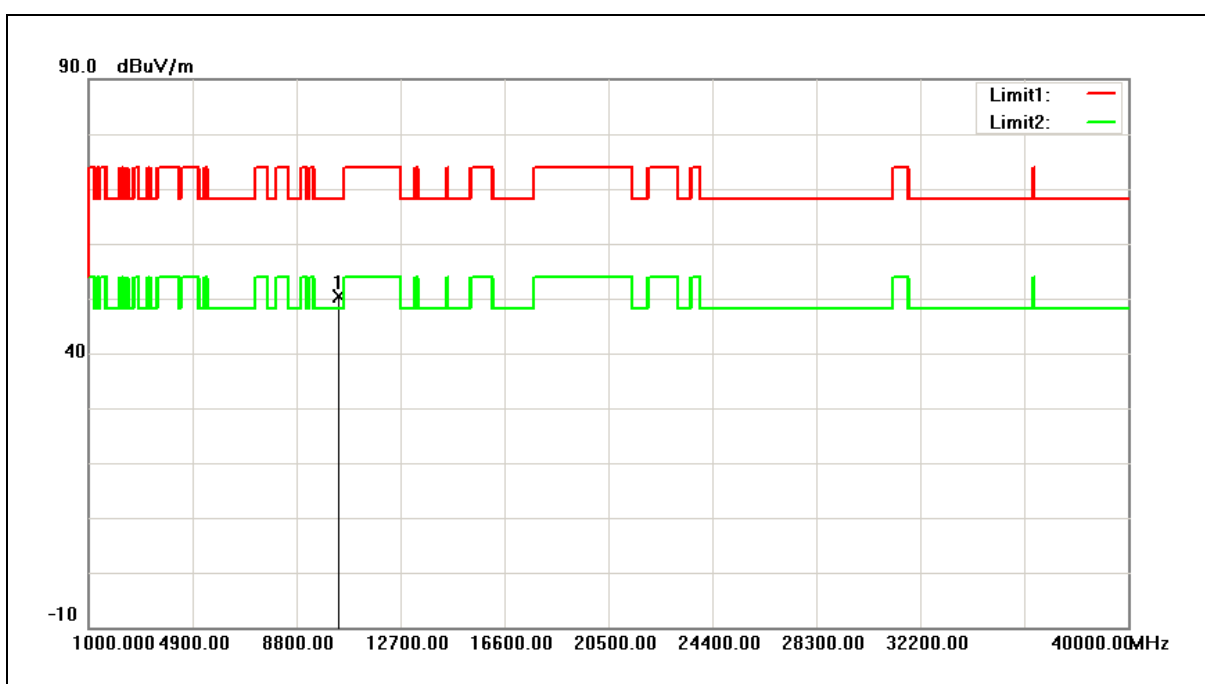


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	45.35	5.07	50.42	68.20	-17.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5200MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/10/2016
Ant.Polar.:	Vertical		

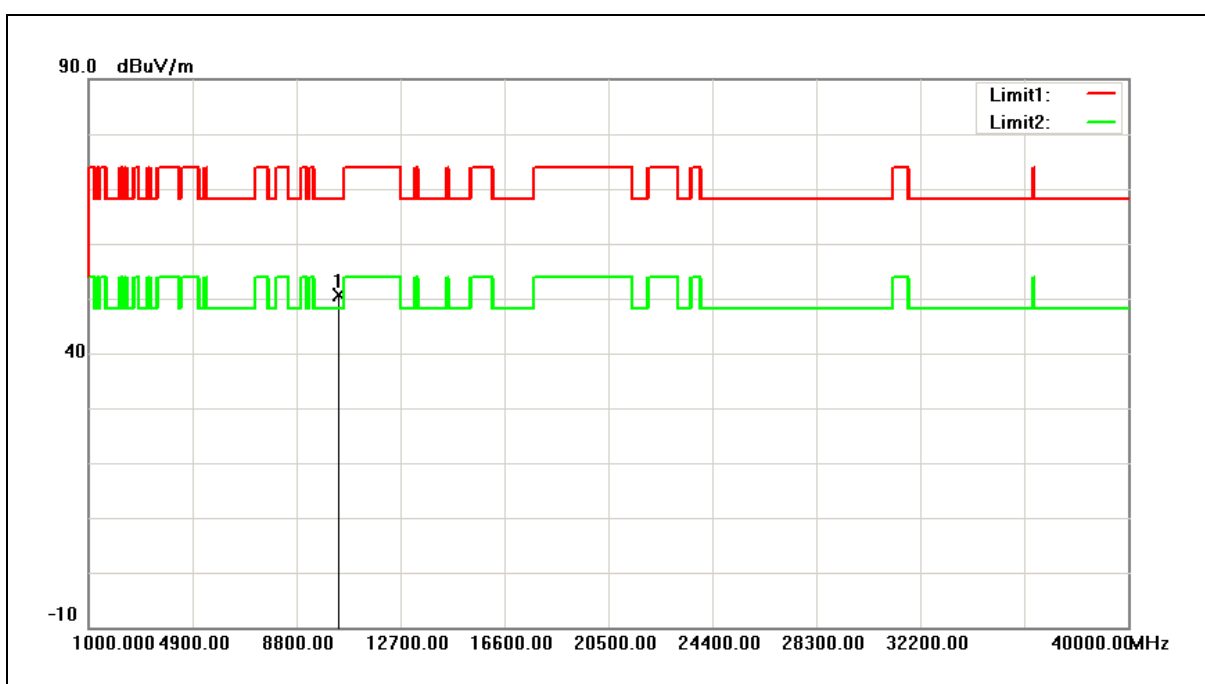


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	45.44	5.07	50.51	68.20	-17.69	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/10/2016
Ant.Polar.:	Horizontal		

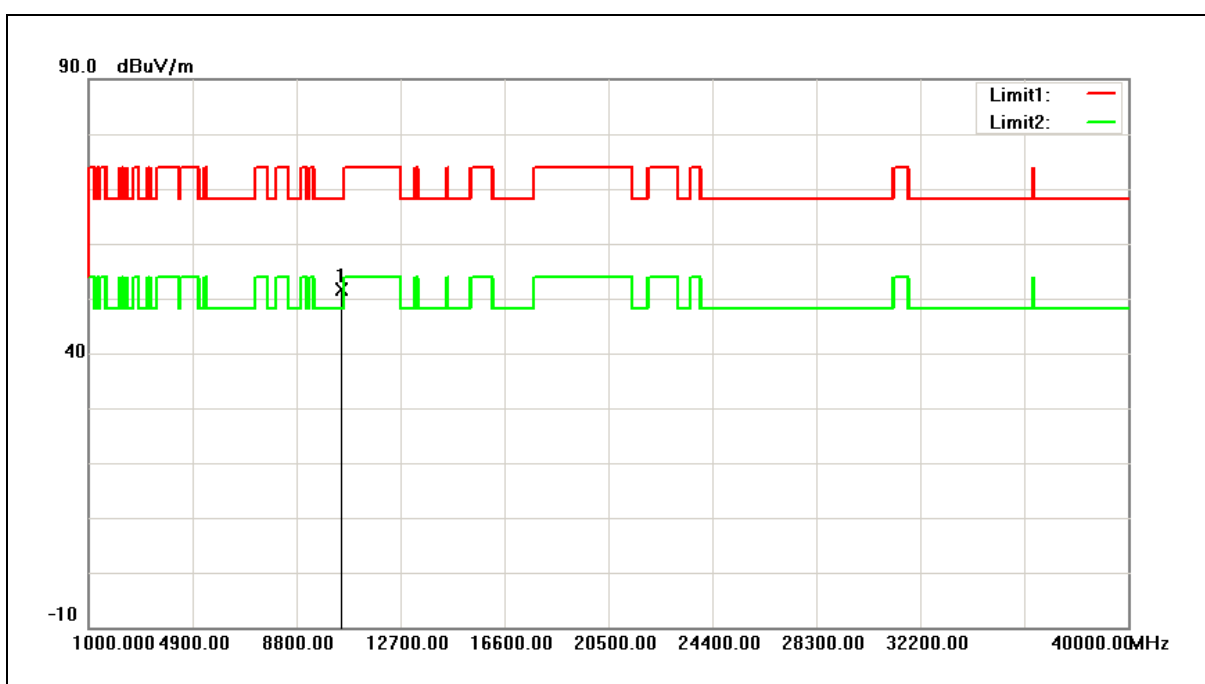


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	46.44	5.25	51.69	68.20	-16.51	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/10/2016
Ant.Polar.:	Vertical		

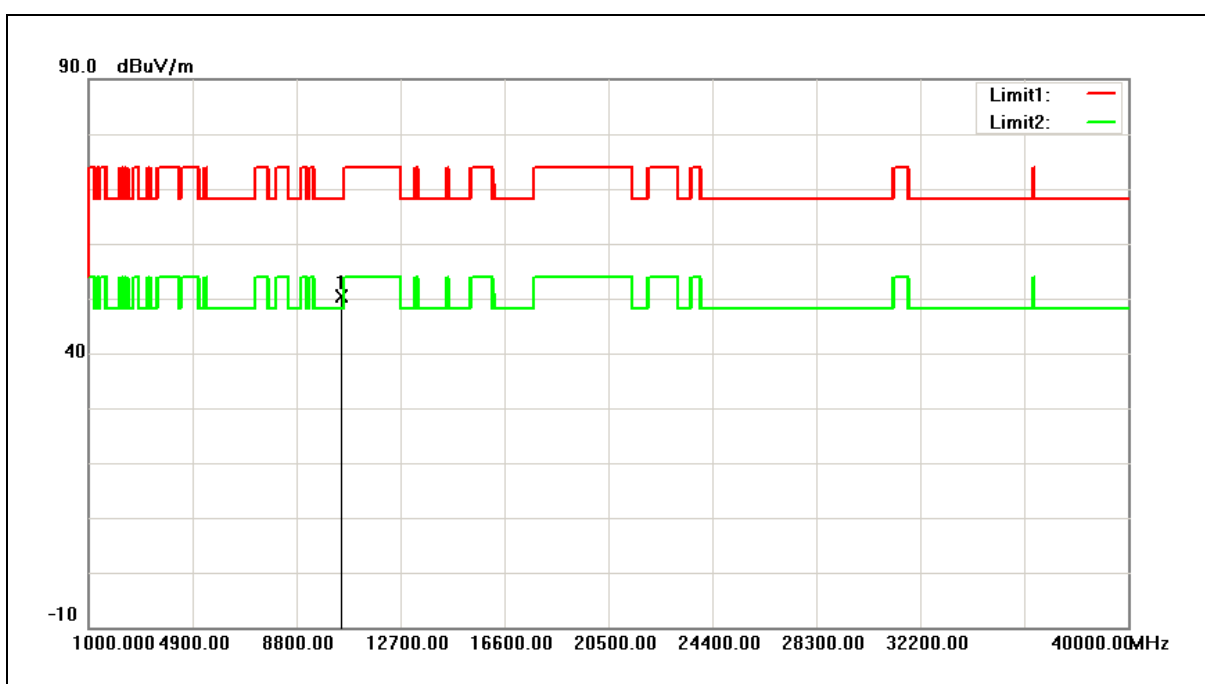


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	45.20	5.25	50.45	68.20	-17.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5260MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/10/2016
Ant.Polar.:	Horizontal		

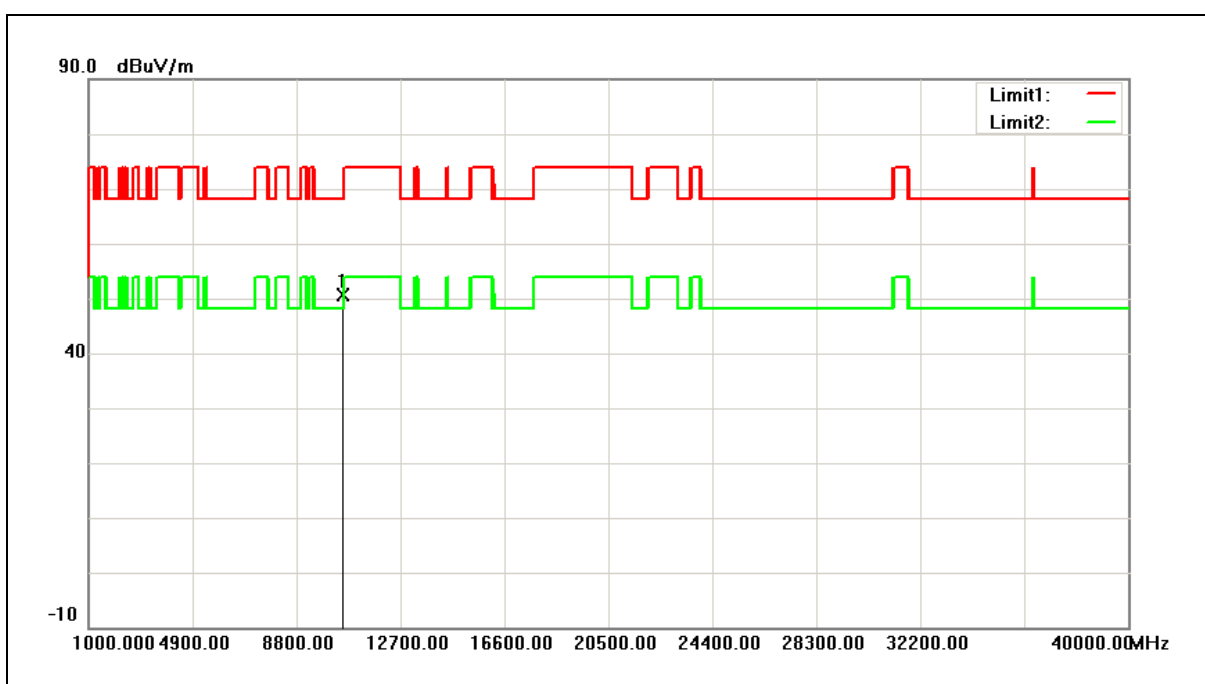


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	45.42	5.33	50.75	68.20	-17.45	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5260MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/10/2016
Ant.Polar.:	Vertical		

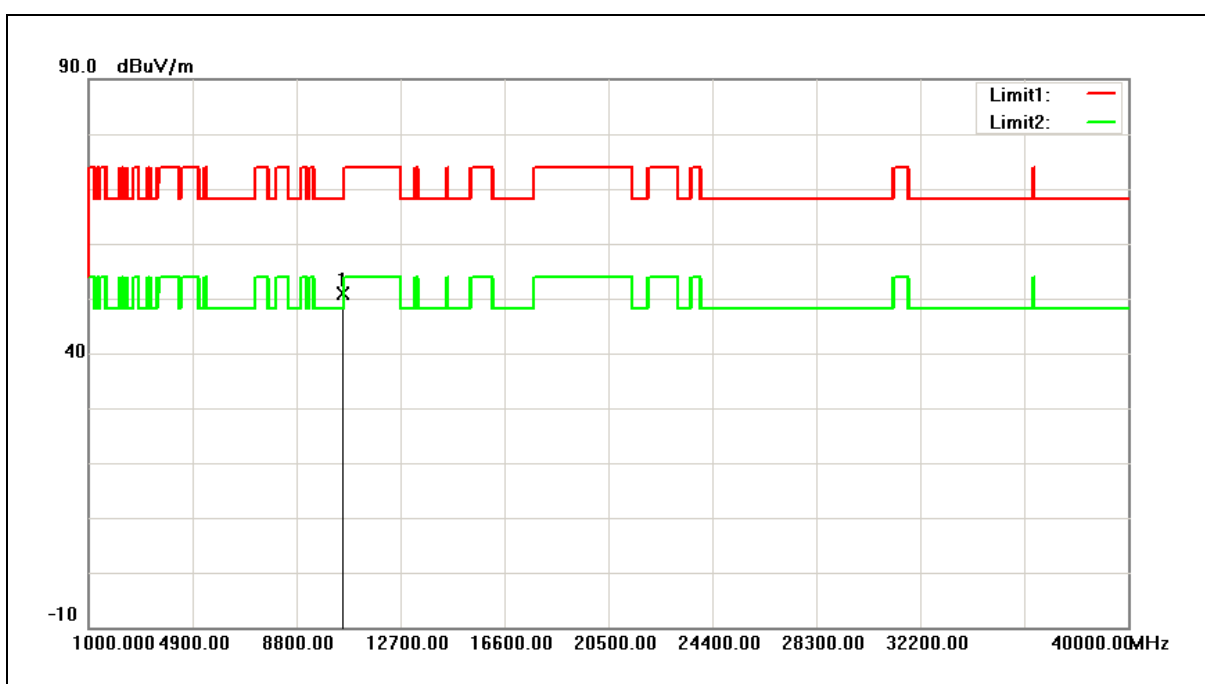


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	45.61	5.33	50.94	68.20	-17.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5280MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/10/2016
Ant.Polar.:	Horizontal		

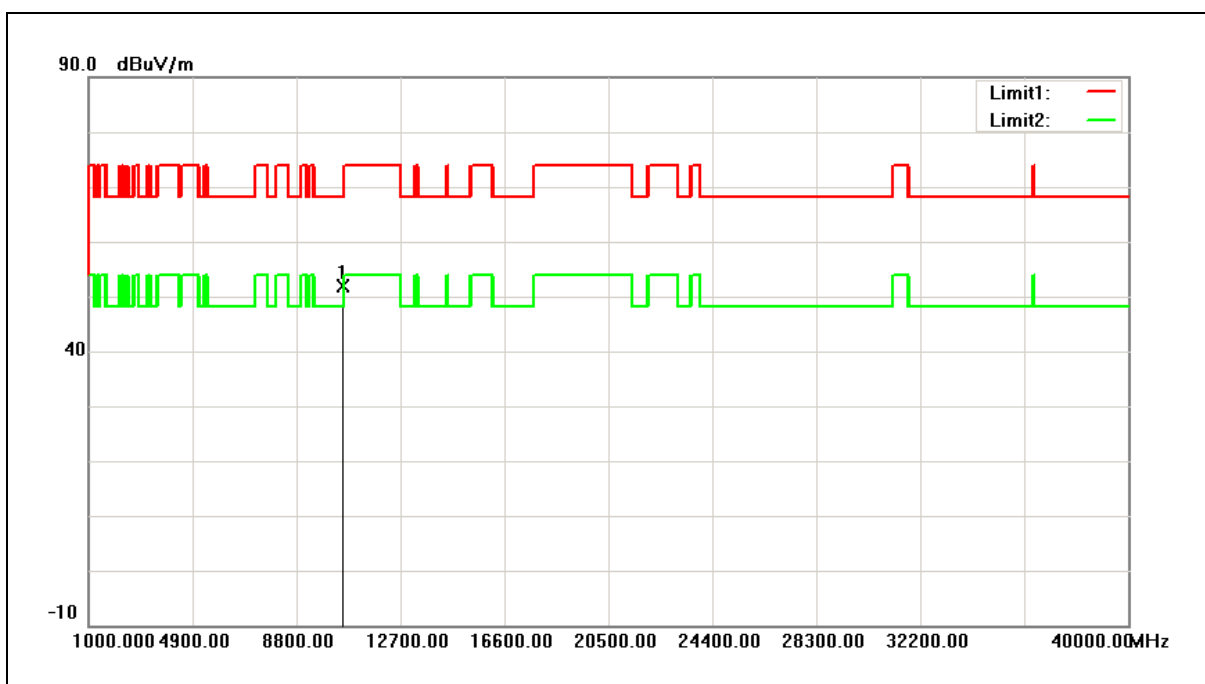


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	46.59	5.37	51.96	68.20	-16.24	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5280MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/10/2016
Ant.Polar.:	Vertical		

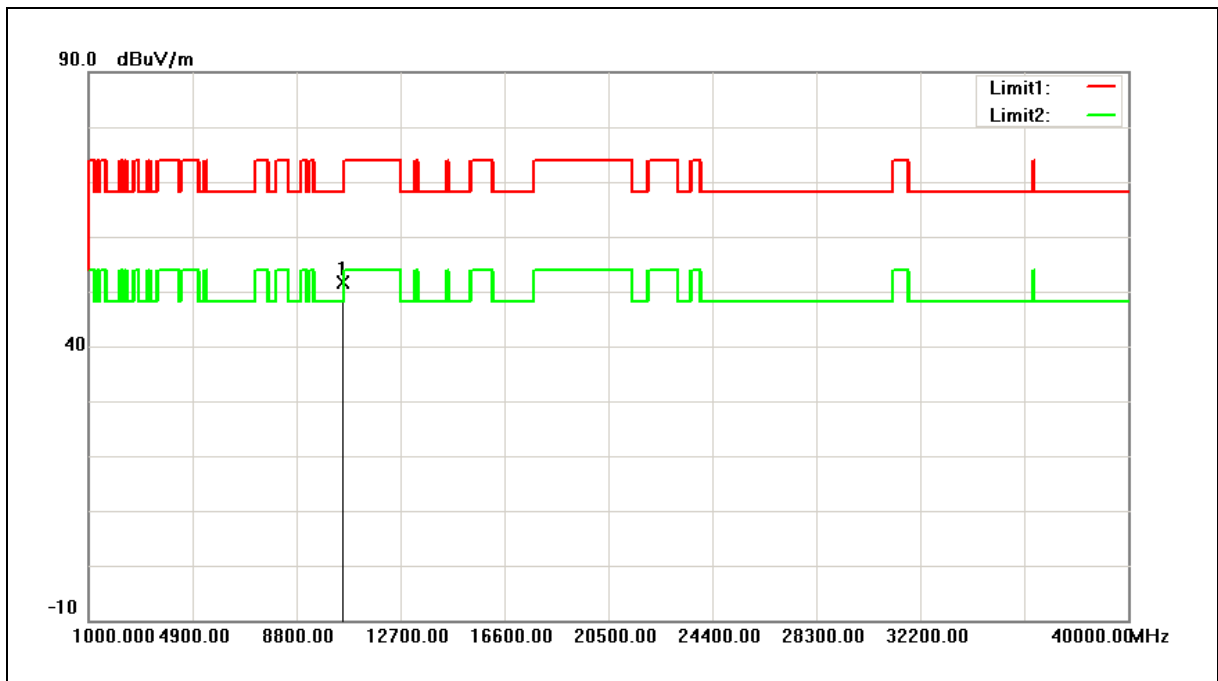


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	46.31	5.37	51.68	68.20	-16.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5320MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/10/2016
Ant.Polar.:	Horizontal		

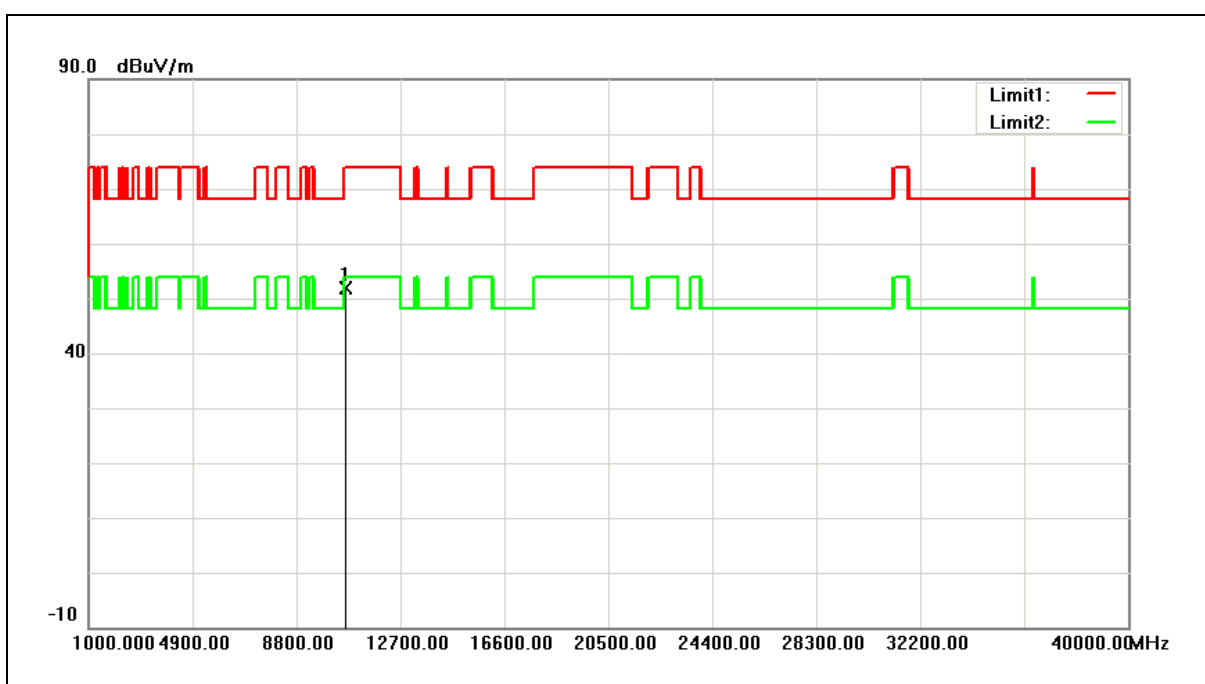


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	46.52	5.45	51.97	74.00	-22.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5320MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/10/2016
Ant.Polar.:	Vertical		

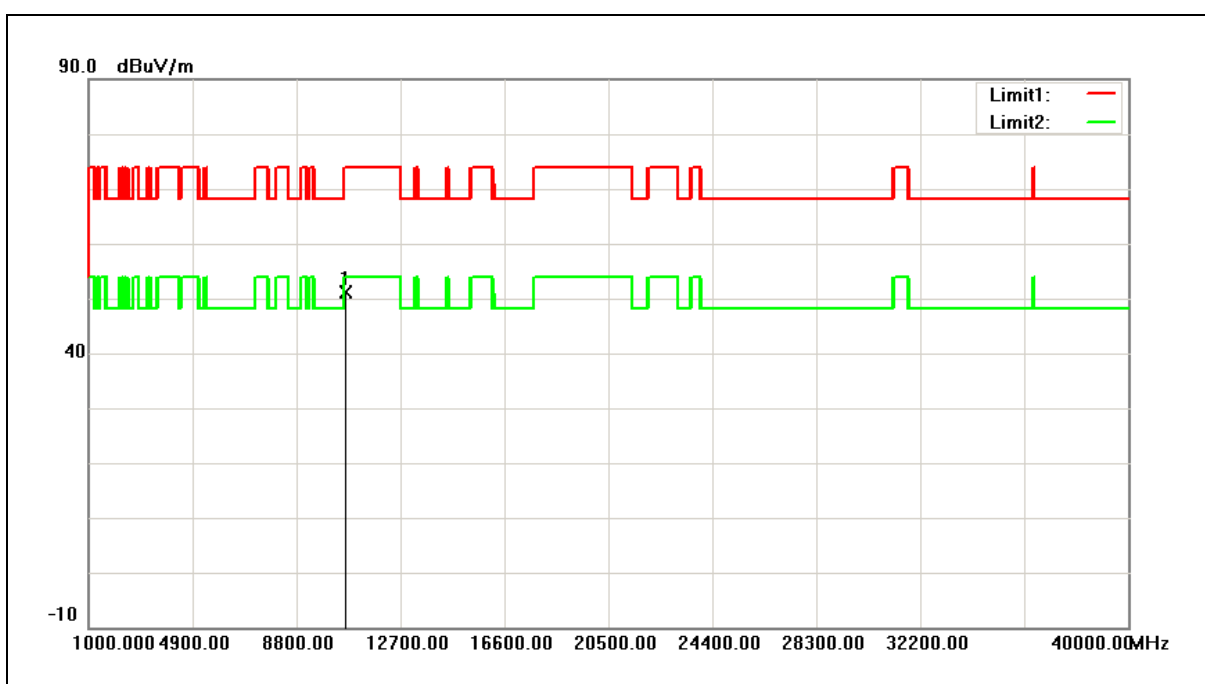


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	45.76	5.45	51.21	74.00	-22.79	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5500MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/10/2016
Ant.Polar.:	Horizontal		

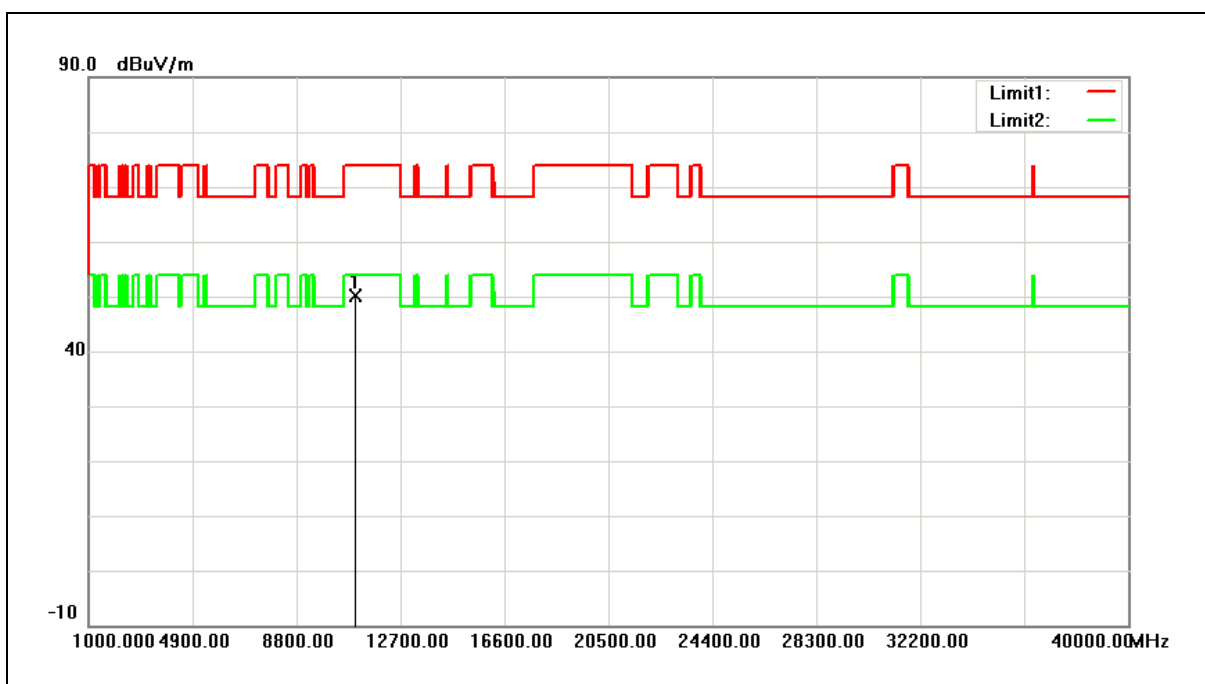


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	44.41	5.78	50.19	74.00	-23.81	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5500MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/10/2016
Ant.Polar.:	Vertical		

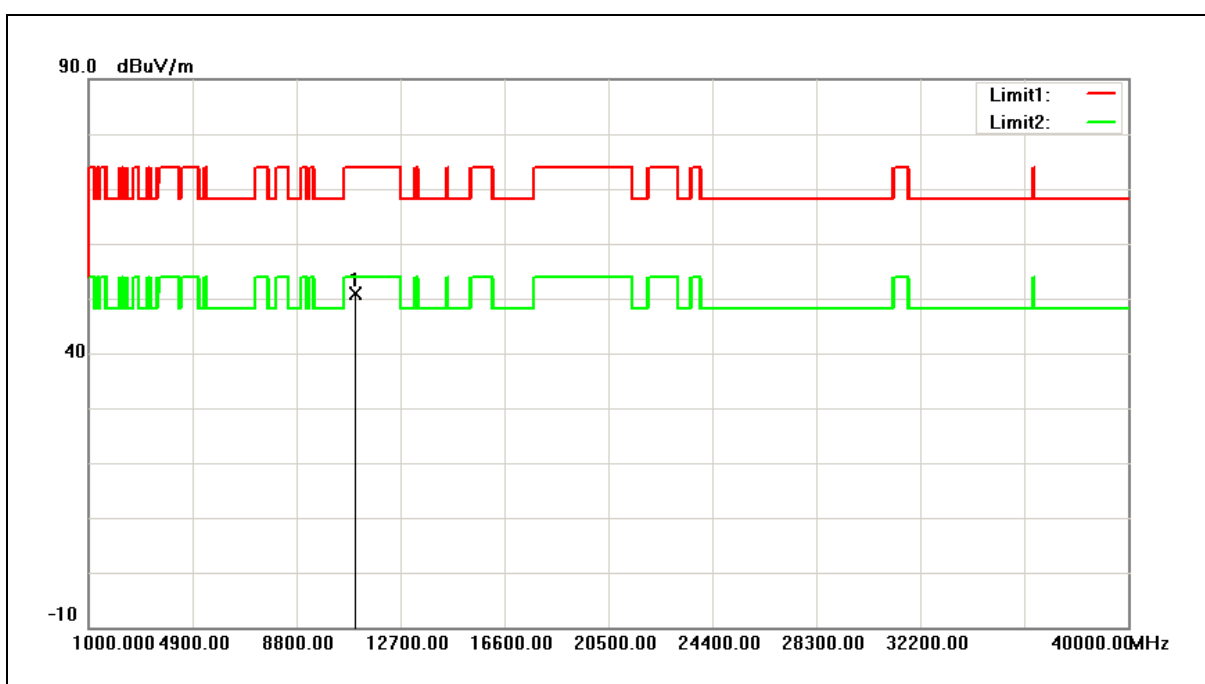


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	45.07	5.78	50.85	74.00	-23.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5560MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/10/2016
Ant.Polar.:	Horizontal		

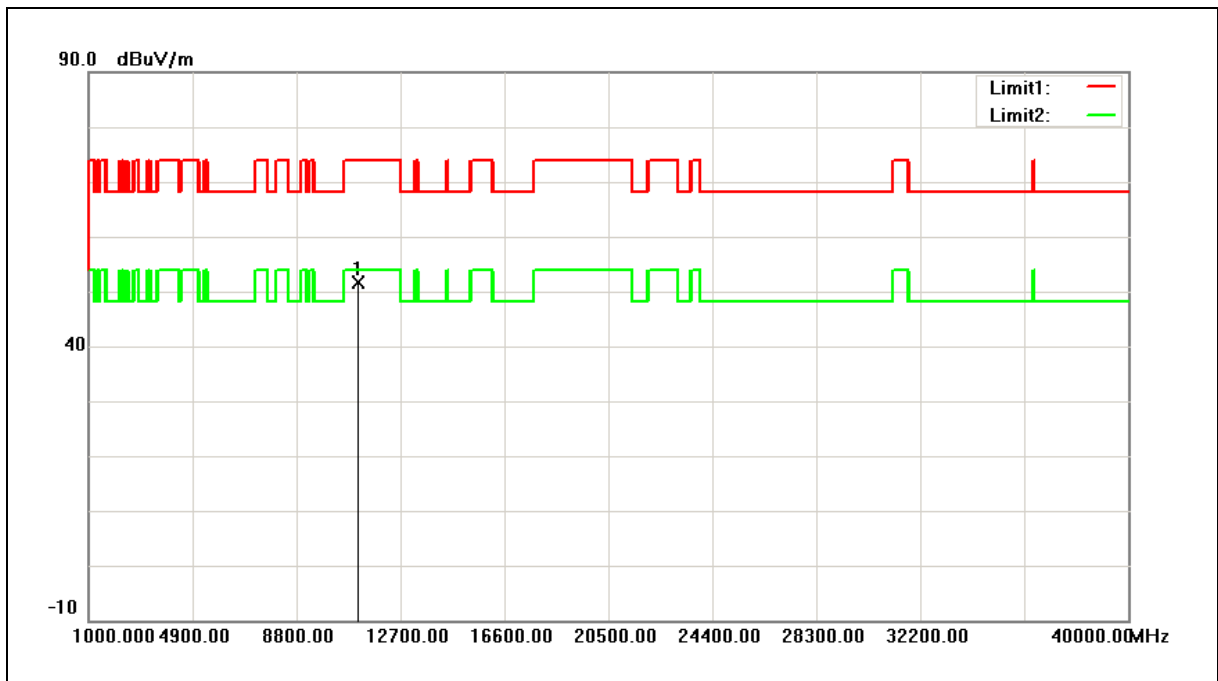


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	45.76	5.87	51.63	74.00	-22.37	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5560MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/10/2016
Ant.Polar.:	Vertical		

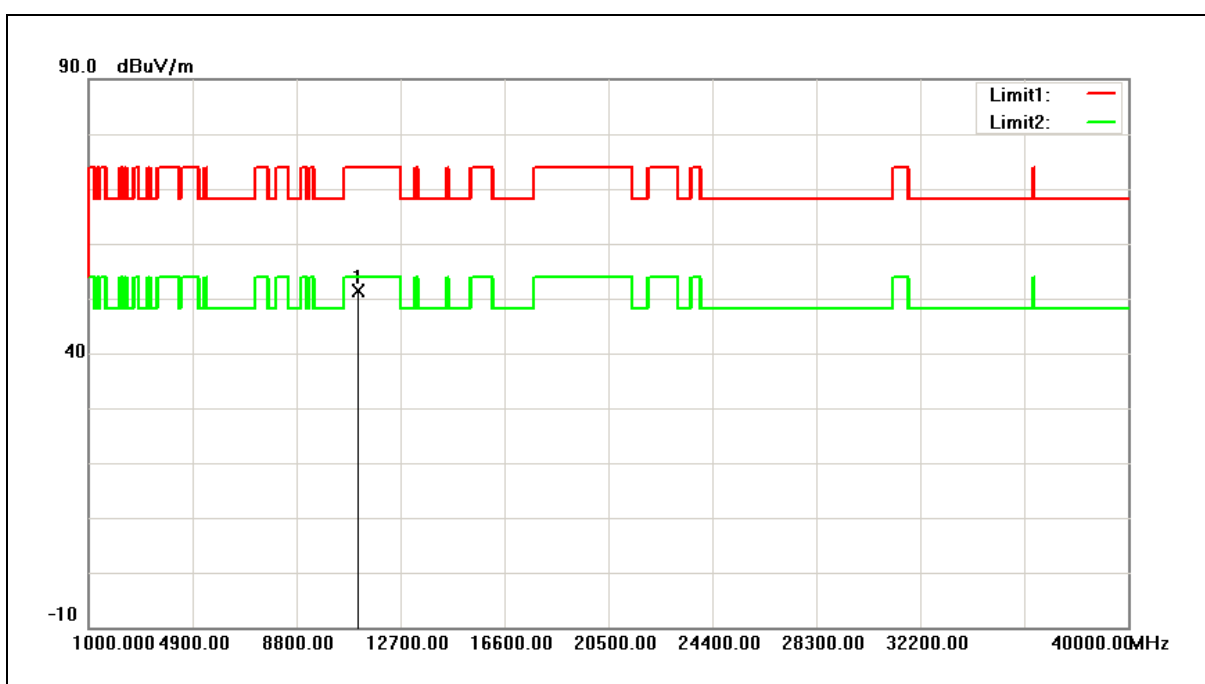


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	45.41	5.87	51.28	74.00	-22.72	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5700MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/10/2016
Ant.Polar.:	Horizontal		

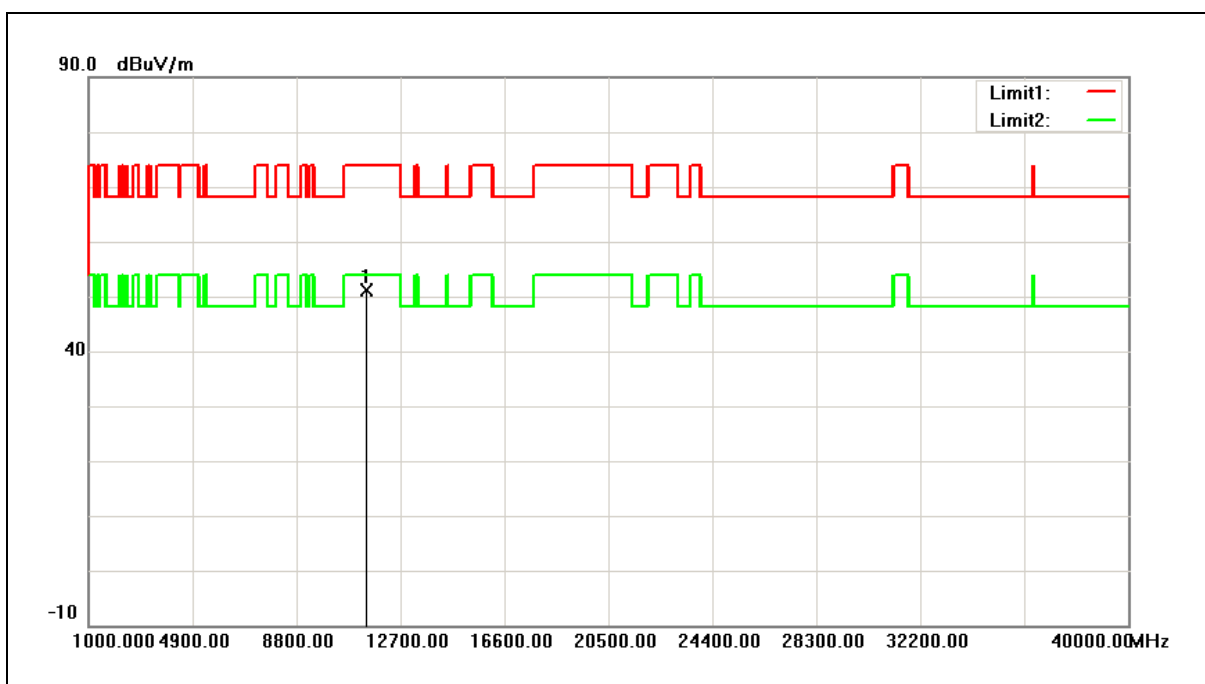


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	45.03	6.07	51.10	74.00	-22.90	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5700MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/10/2016
Ant.Polar.:	Vertical		

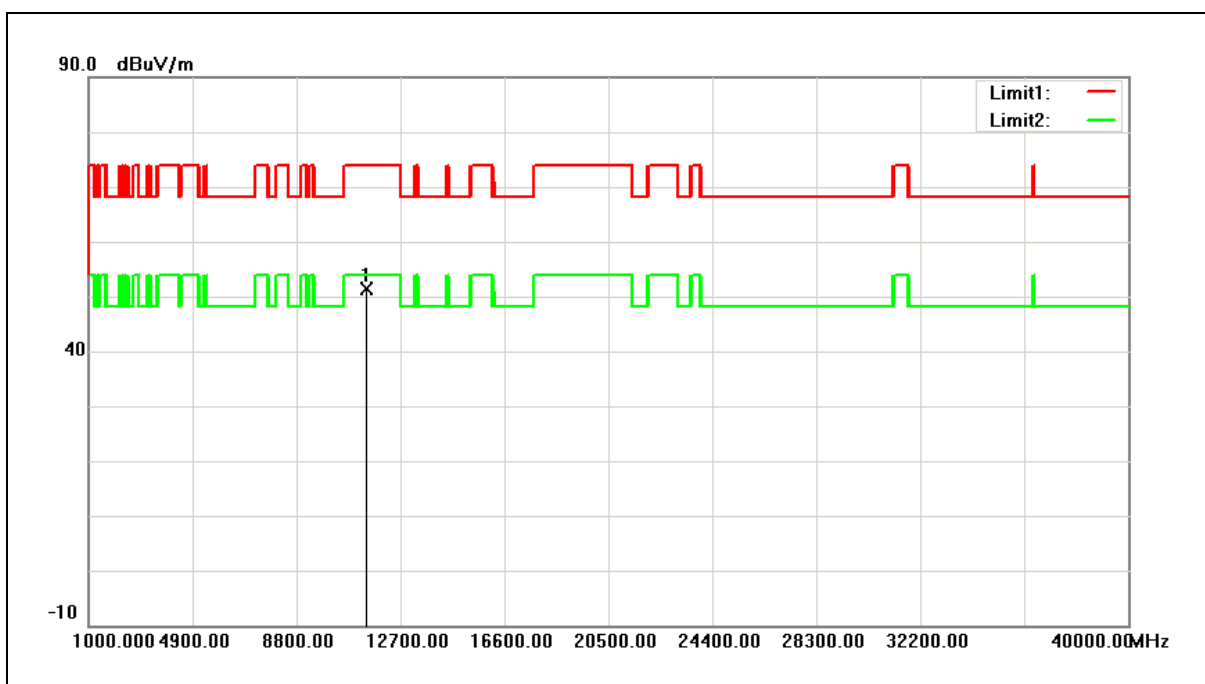


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	45.38	6.07	51.45	74.00	-22.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5745MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/10/2016
Ant.Polar.:	Horizontal		

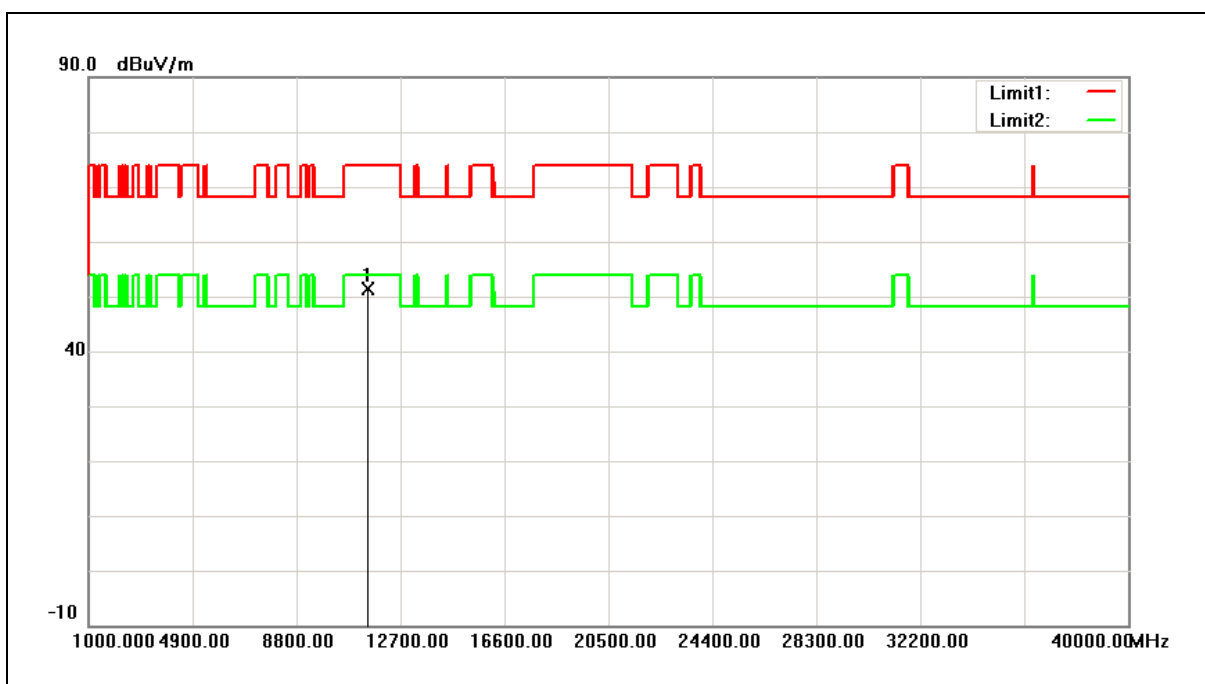


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	45.29	6.14	51.43	74.00	-22.57	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5745MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/10/2016
Ant.Polar.:	Vertical		

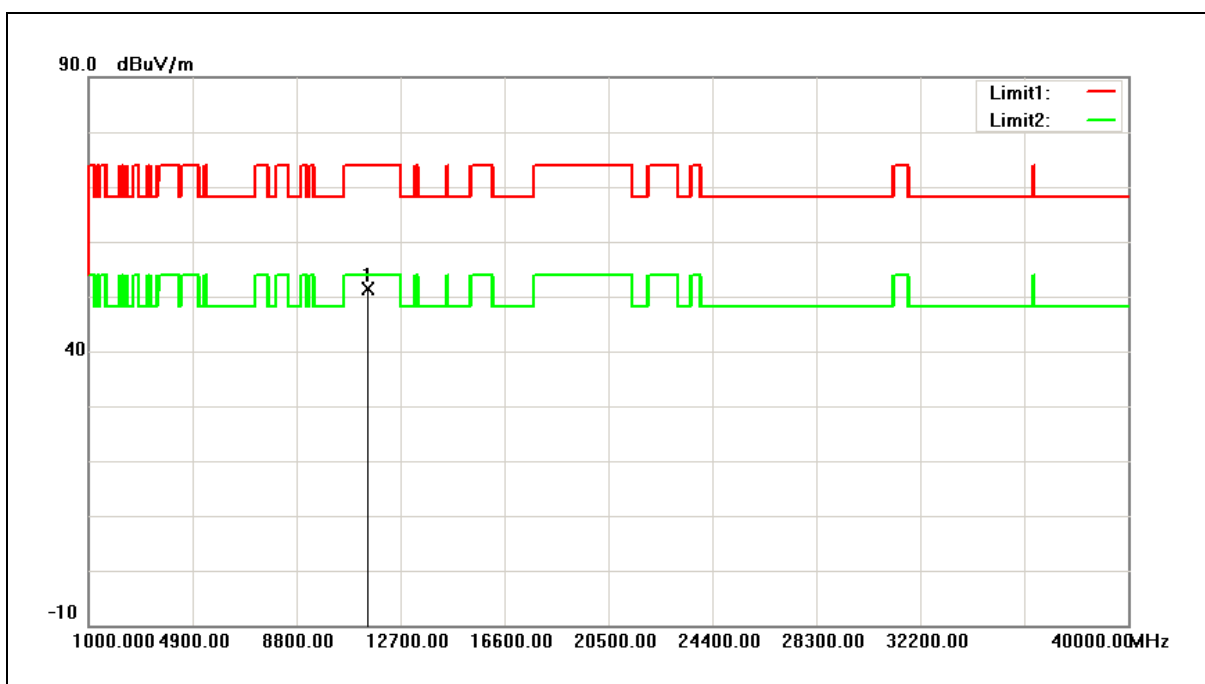


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	45.13	6.14	51.27	74.00	-22.73	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/10/2016
Ant.Polar.:	Horizontal		

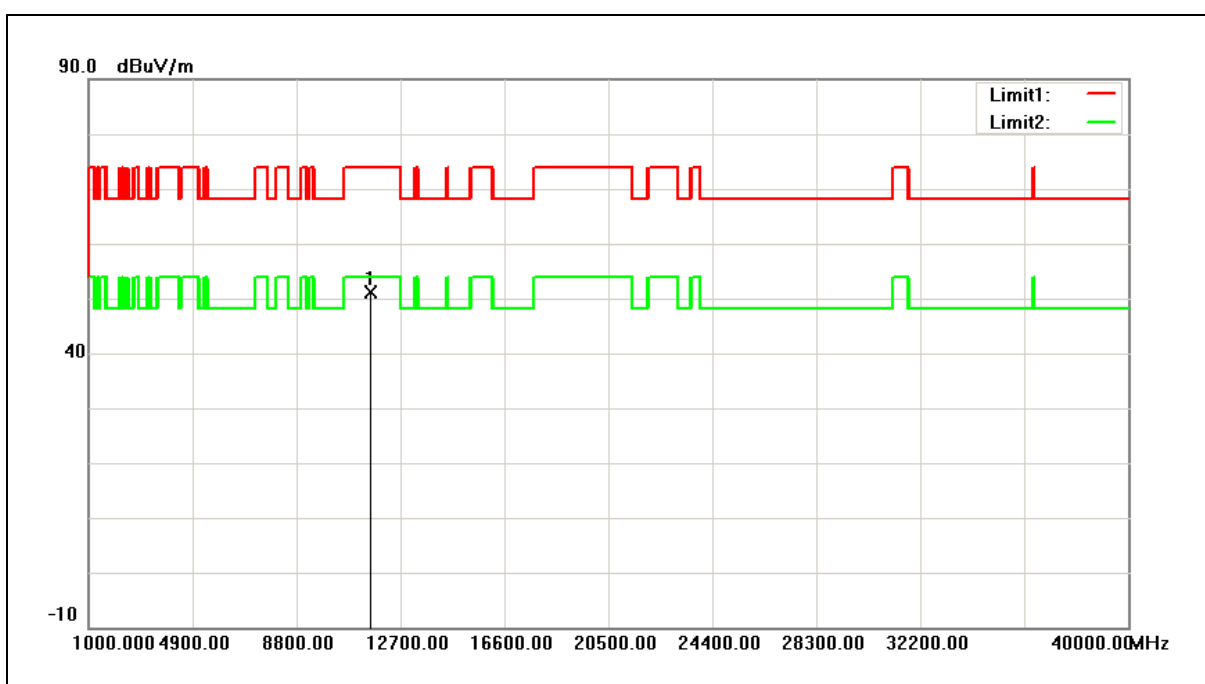


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	44.78	6.35	51.13	74.00	-22.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/10/2016
Ant.Polar.:	Vertical		

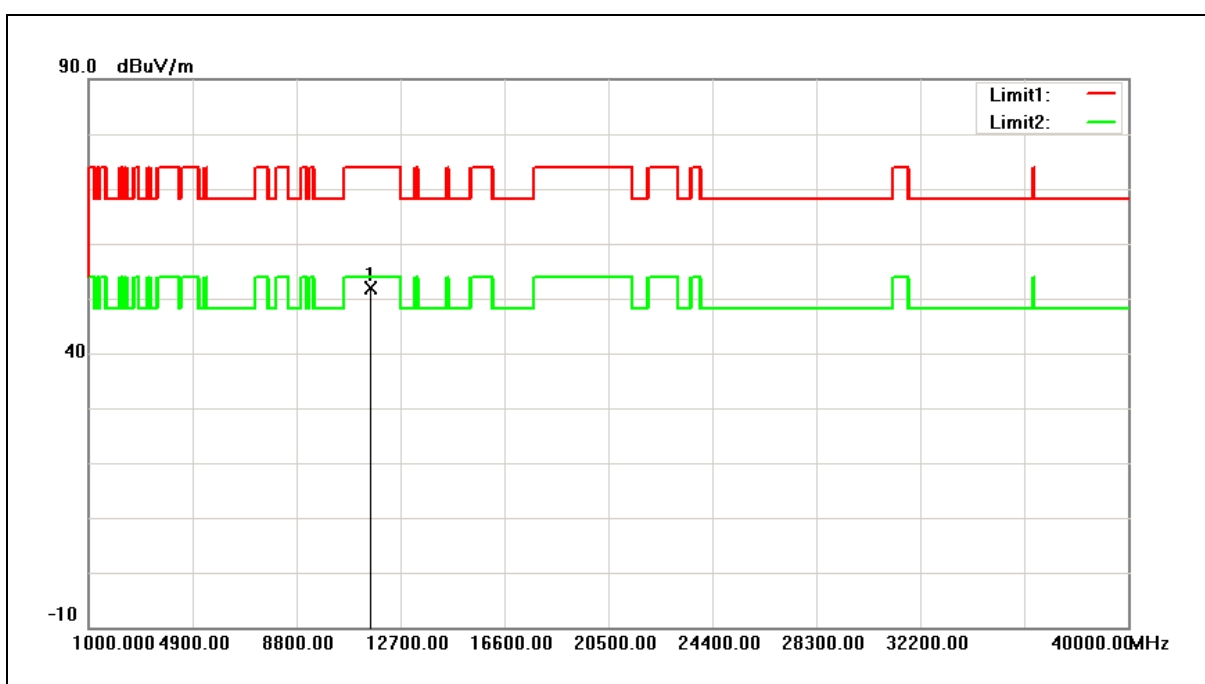


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	45.53	6.35	51.88	74.00	-22.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5825MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/10/2016
Ant.Polar.:	Horizontal		

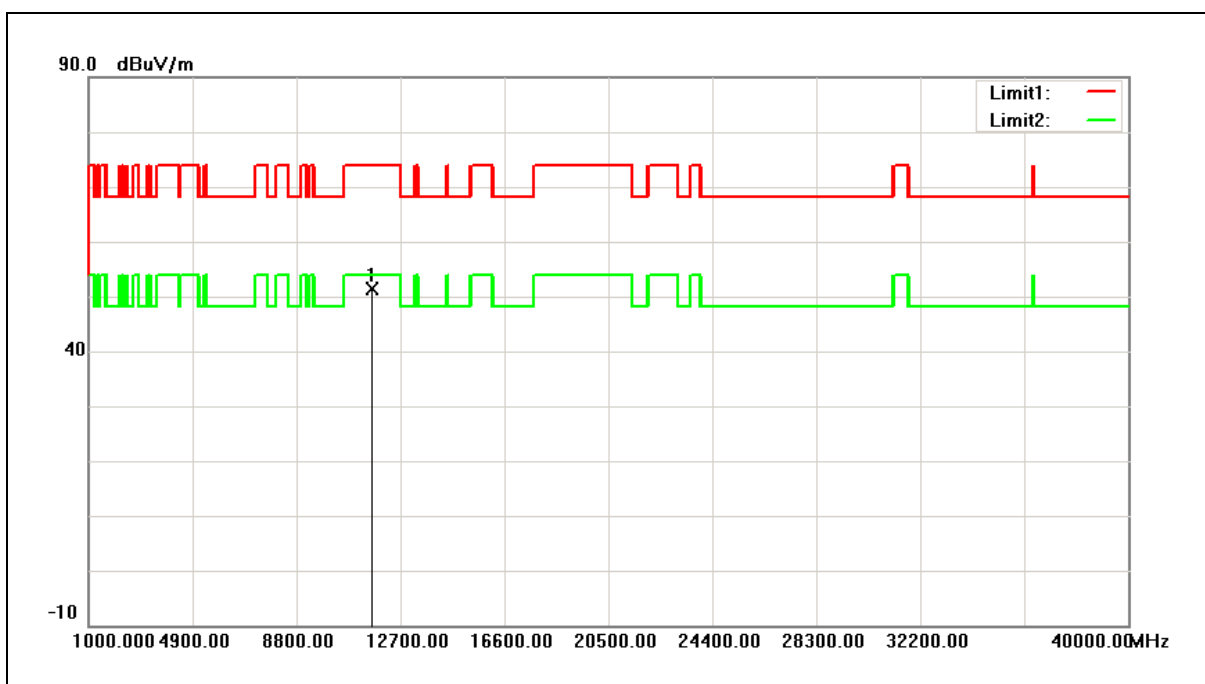


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	44.81	6.58	51.39	74.00	-22.61	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5825MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/10/2016
Ant.Polar.:	Vertical		

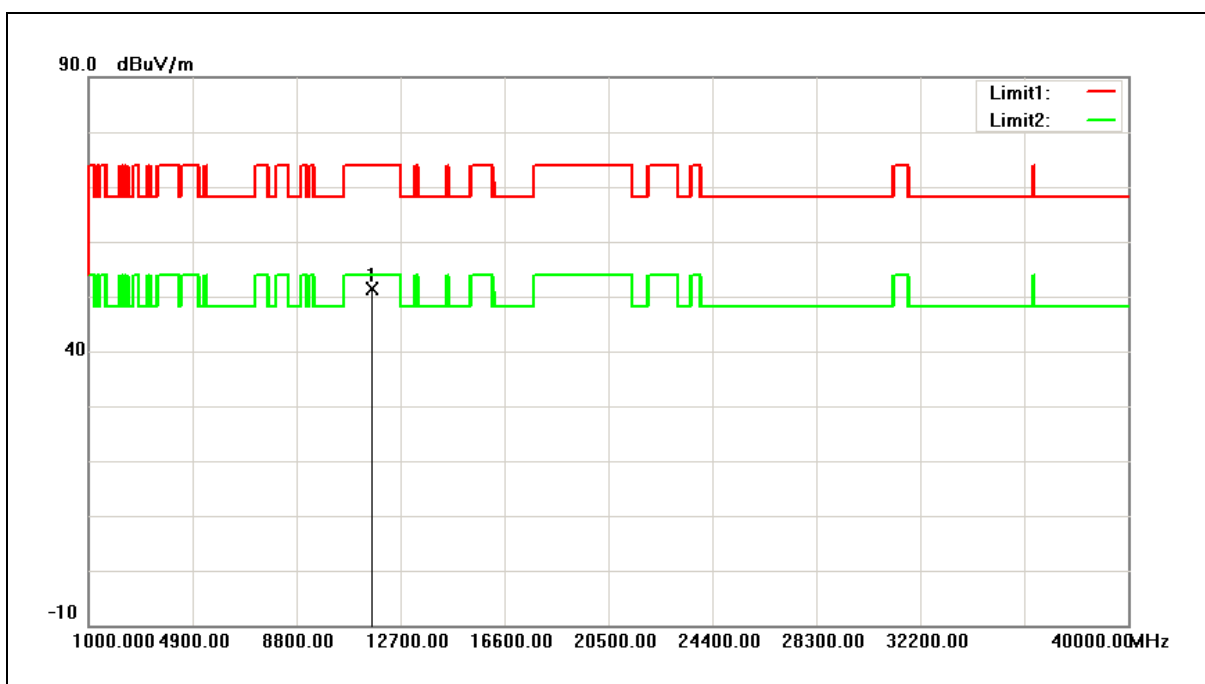


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	44.89	6.58	51.47	74.00	-22.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5180MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/10/2016
Ant.Polar.:	Horizontal		

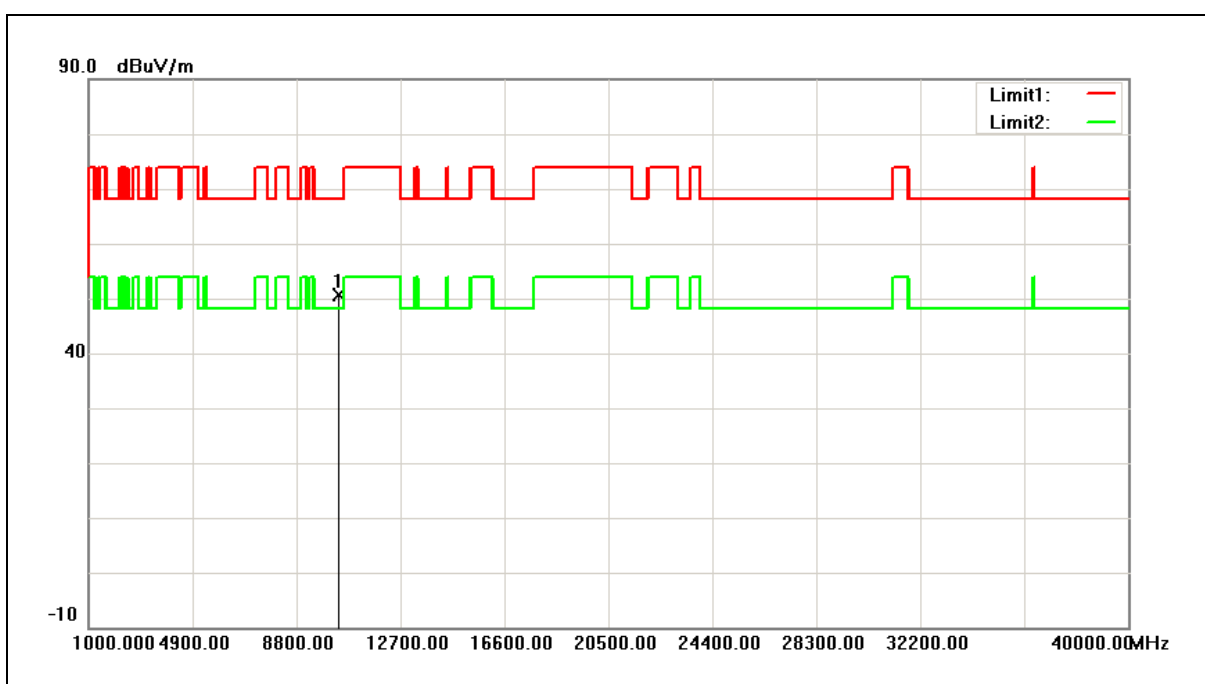


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	45.64	4.97	50.61	68.20	-17.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5180MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/10/2016
Ant.Polar.:	Vertical		

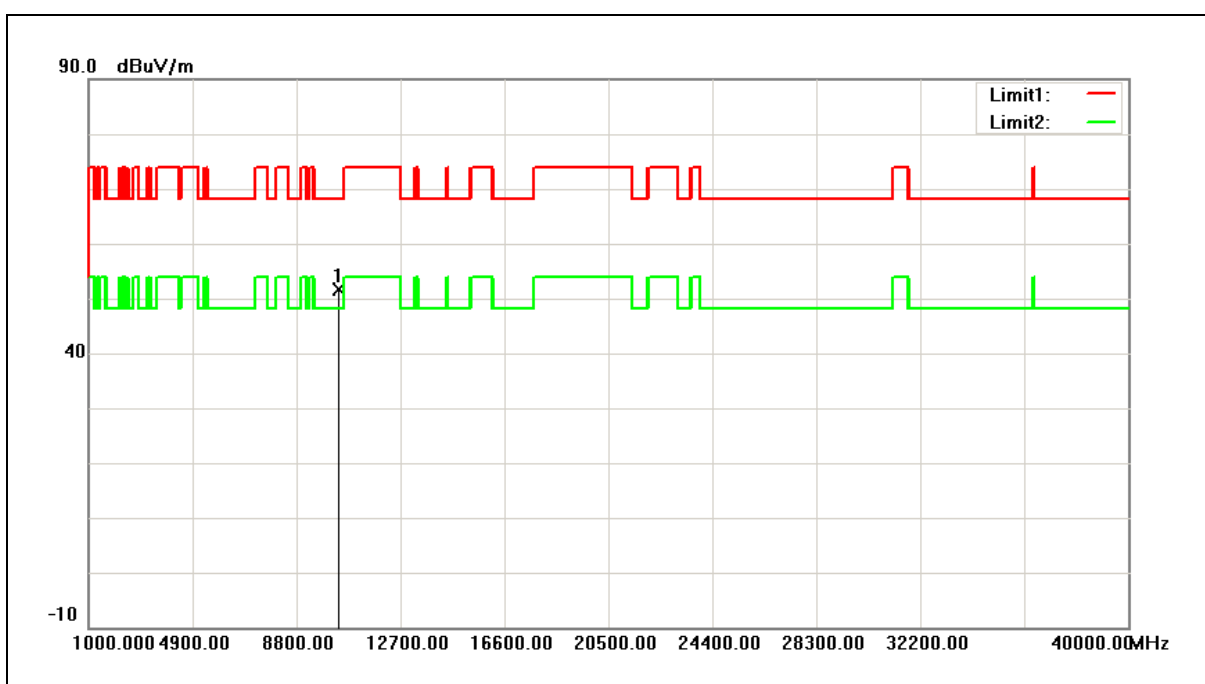


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	46.68	4.97	51.65	68.20	-16.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5200MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/10/2016
Ant.Polar.:	Horizontal		

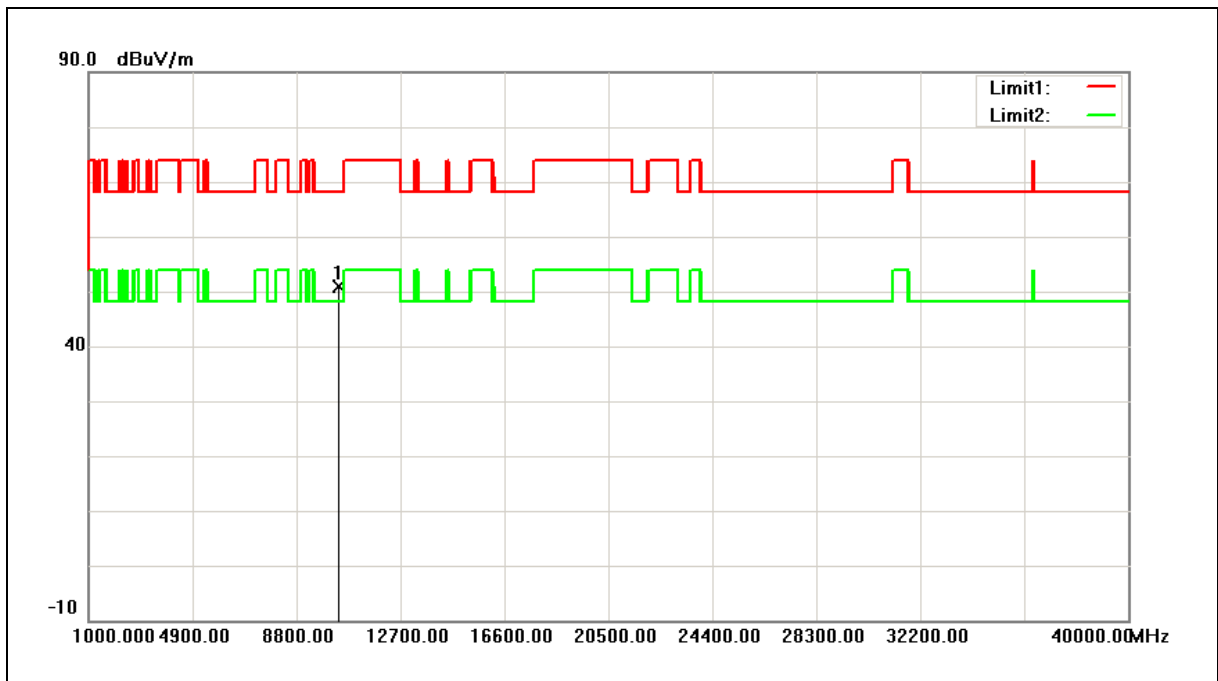


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	45.81	5.07	50.88	68.20	-17.32	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5200MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/10/2016
Ant.Polar.:	Vertical		

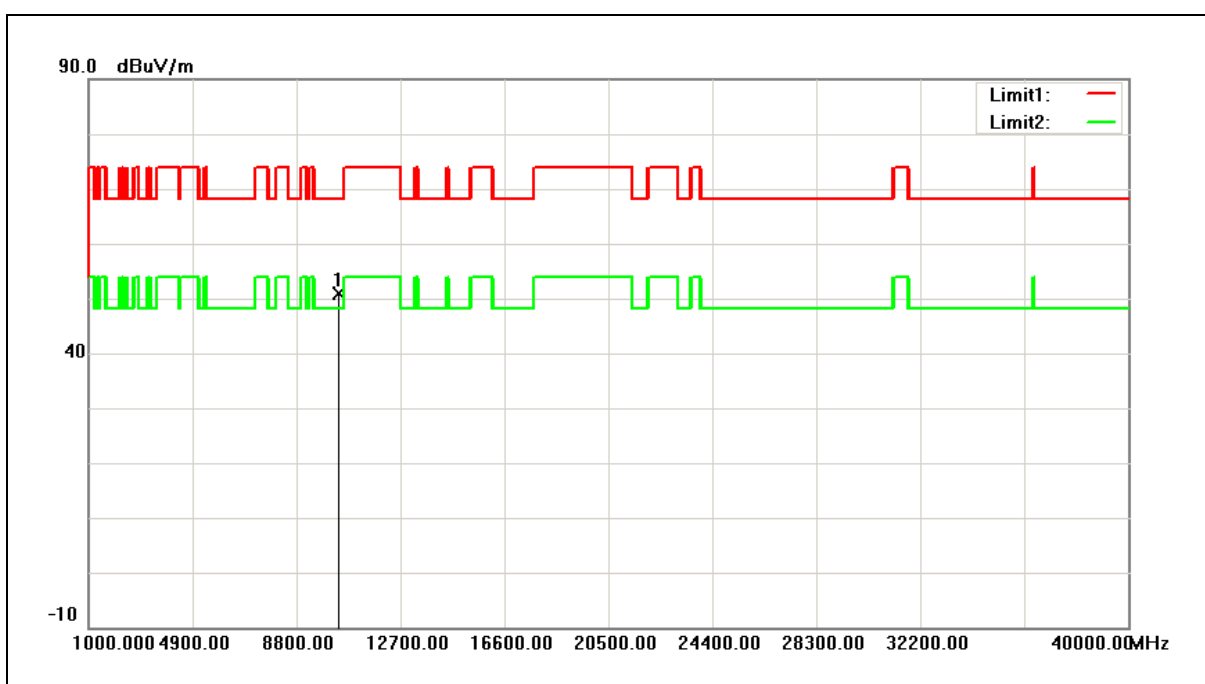


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	45.90	5.07	50.97	68.20	-17.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/10/2016
Ant.Polar.:	Horizontal		

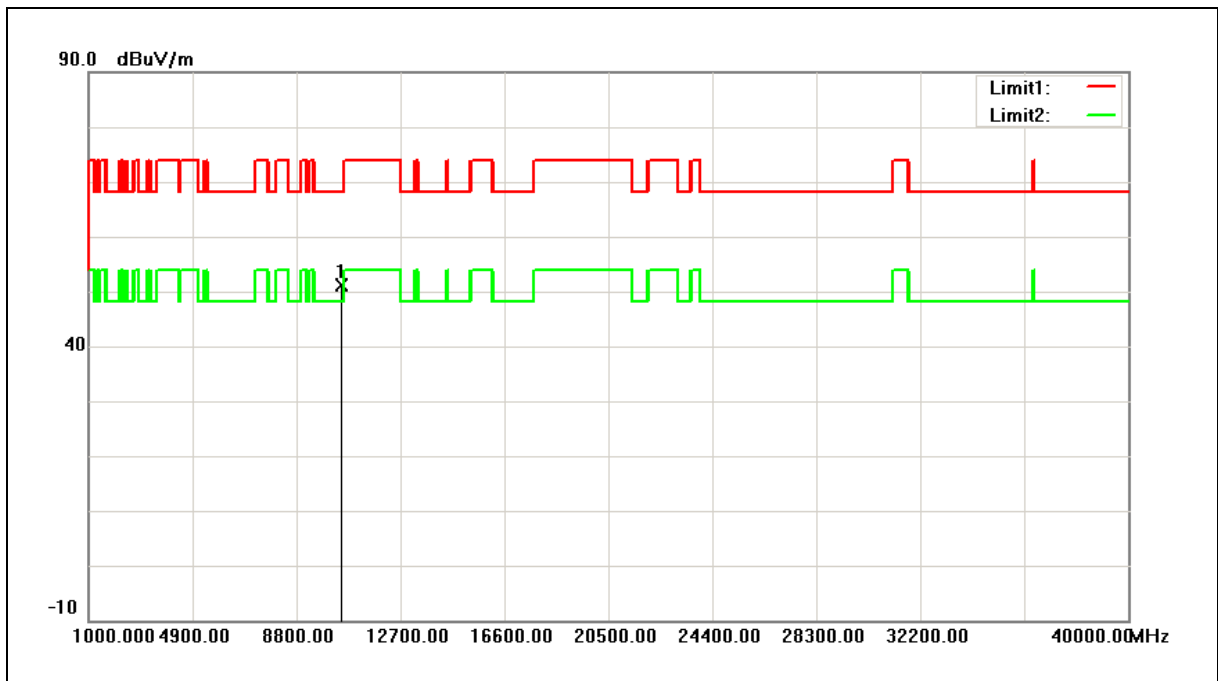


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	45.84	5.25	51.09	68.20	-17.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/10/2016
Ant.Polar.:	Vertical		

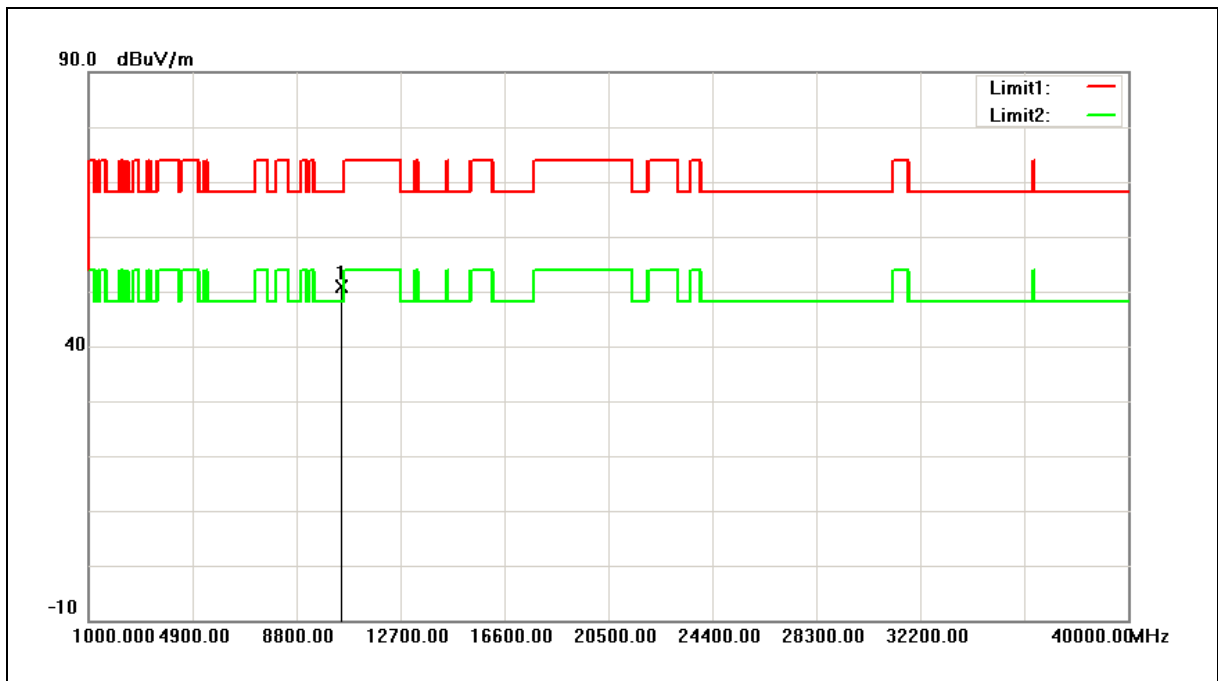


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	45.55	5.25	50.80	68.20	-17.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5260MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/10/2016
Ant.Polar.:	Horizontal		

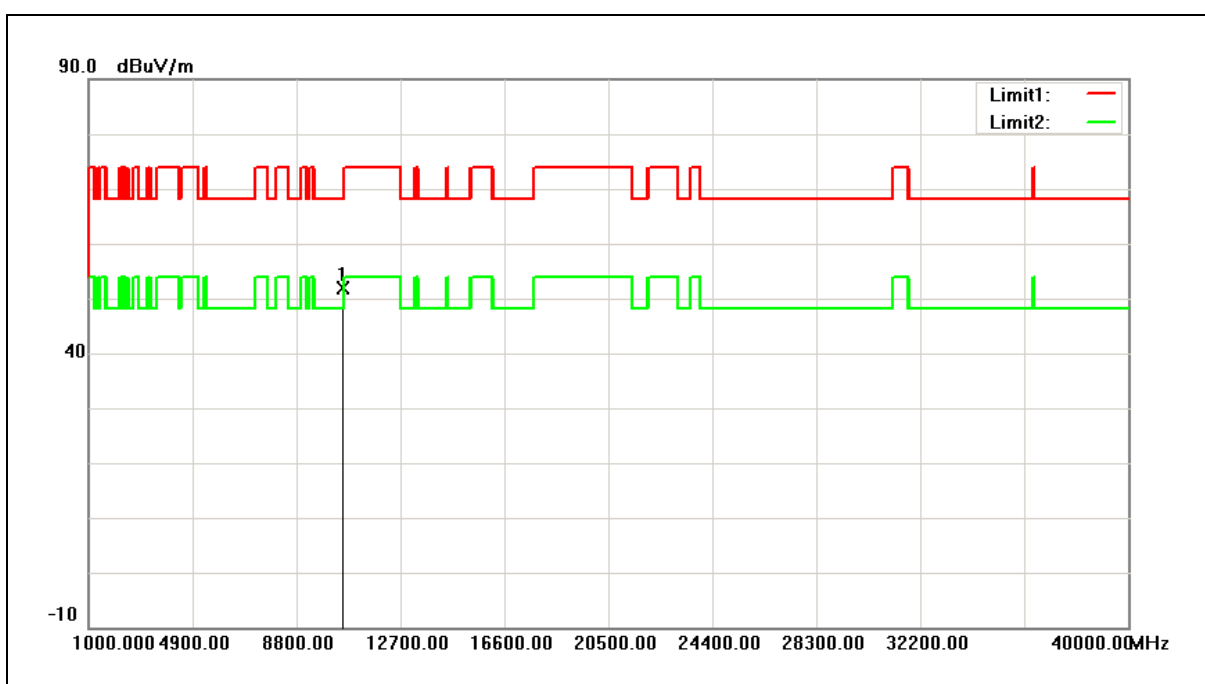


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	46.55	5.33	51.88	68.20	-16.32	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5260MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/10/2016
Ant.Polar.:	Vertical		

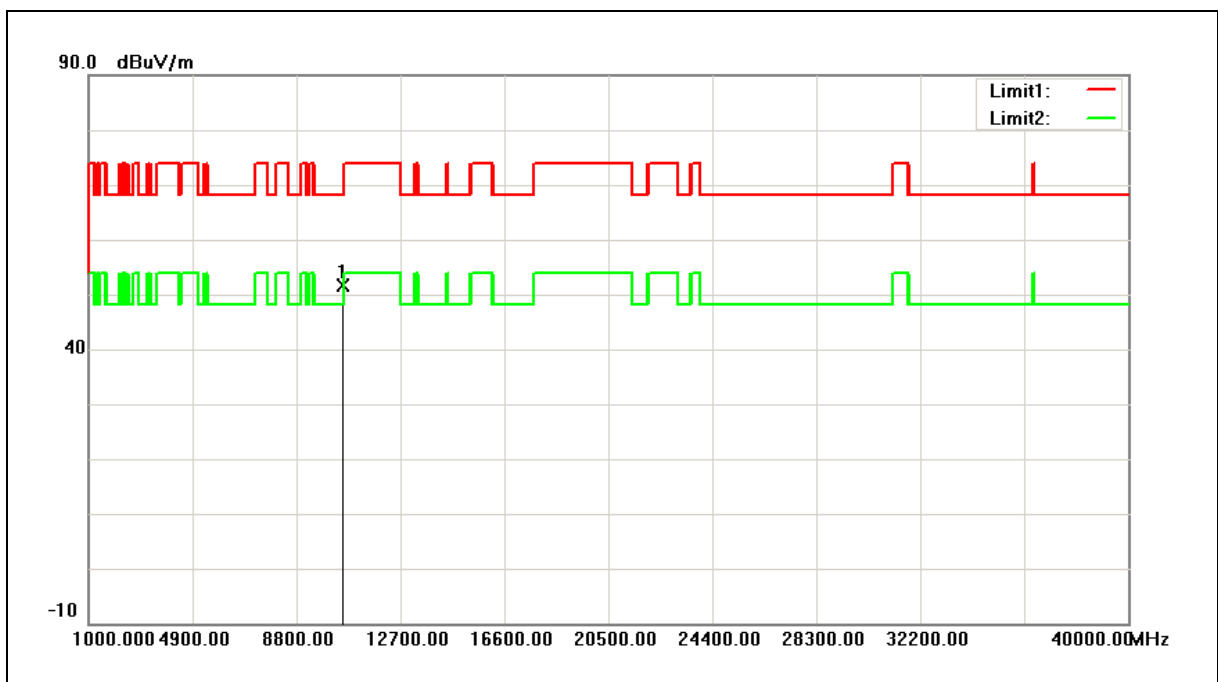


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	46.31	5.33	51.64	68.20	-16.56	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5280MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/10/2016
Ant.Polar.:	Horizontal		

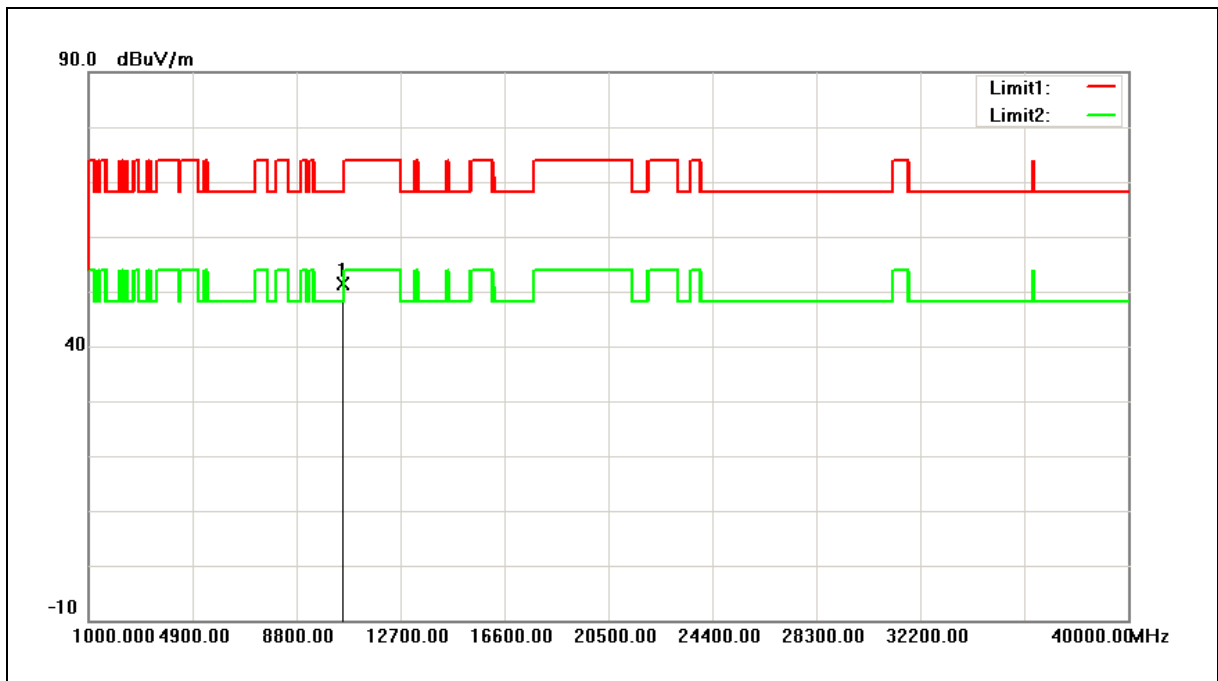


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	45.92	5.37	51.29	68.20	-16.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5280MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/10/2016
Ant.Polar.:	Vertical		

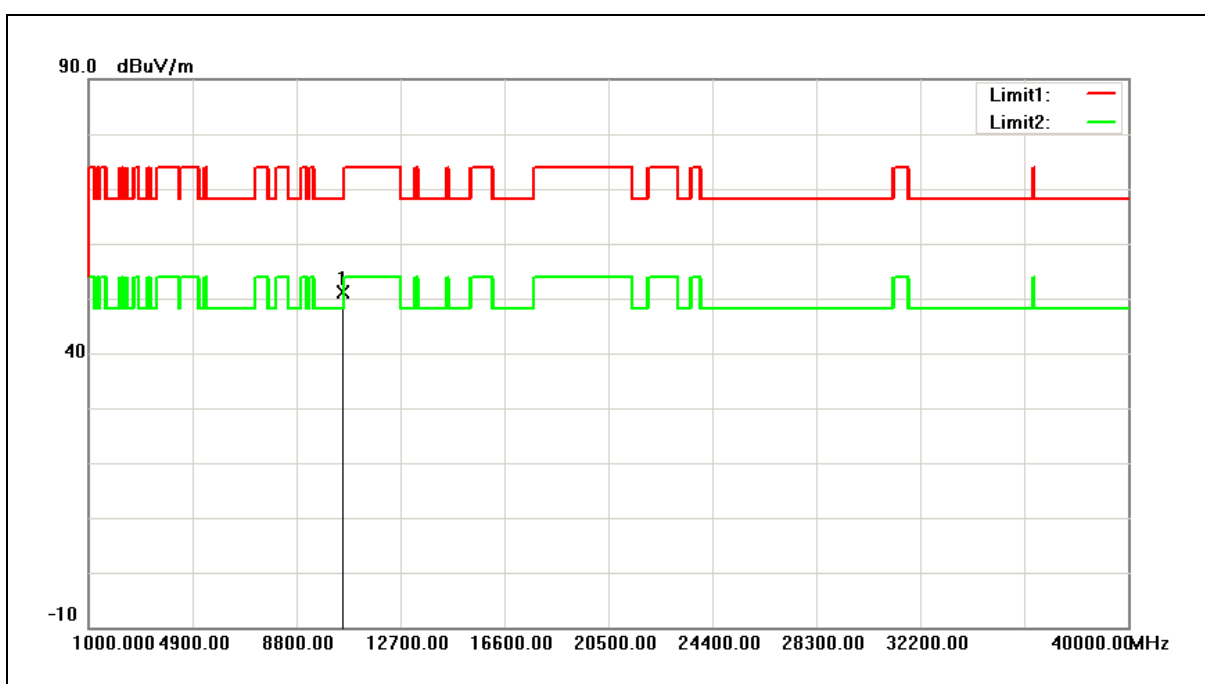


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	45.88	5.37	51.25	68.20	-16.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5320MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/10/2016
Ant.Polar.:	Horizontal		

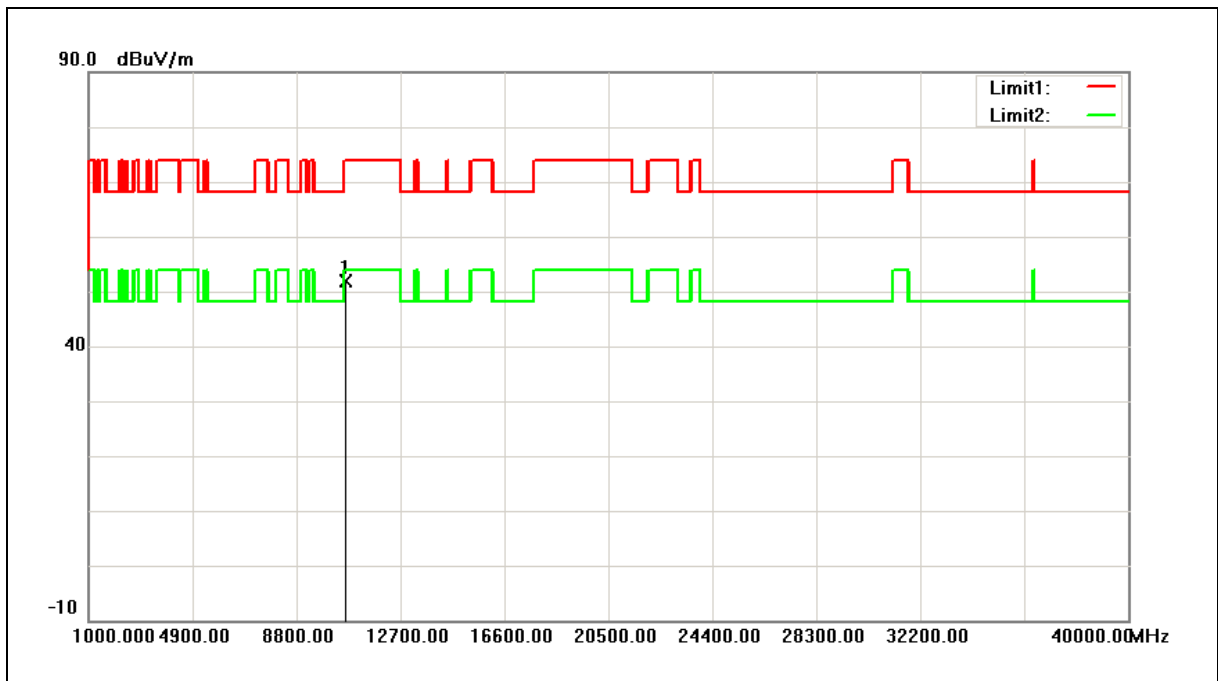


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	46.38	5.45	51.83	74.00	-22.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5320MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/10/2016
Ant.Polar.:	Vertical		

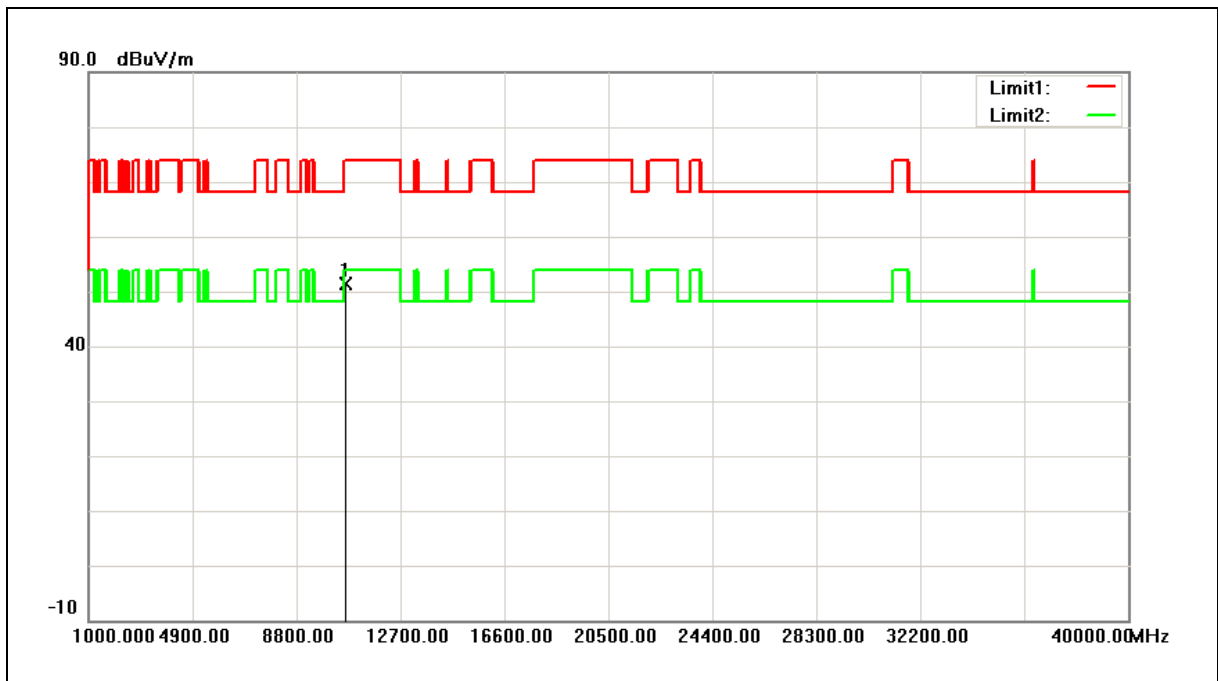


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	46.00	5.45	51.45	74.00	-22.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5500MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/10/2016
Ant.Polar.:	Horizontal		

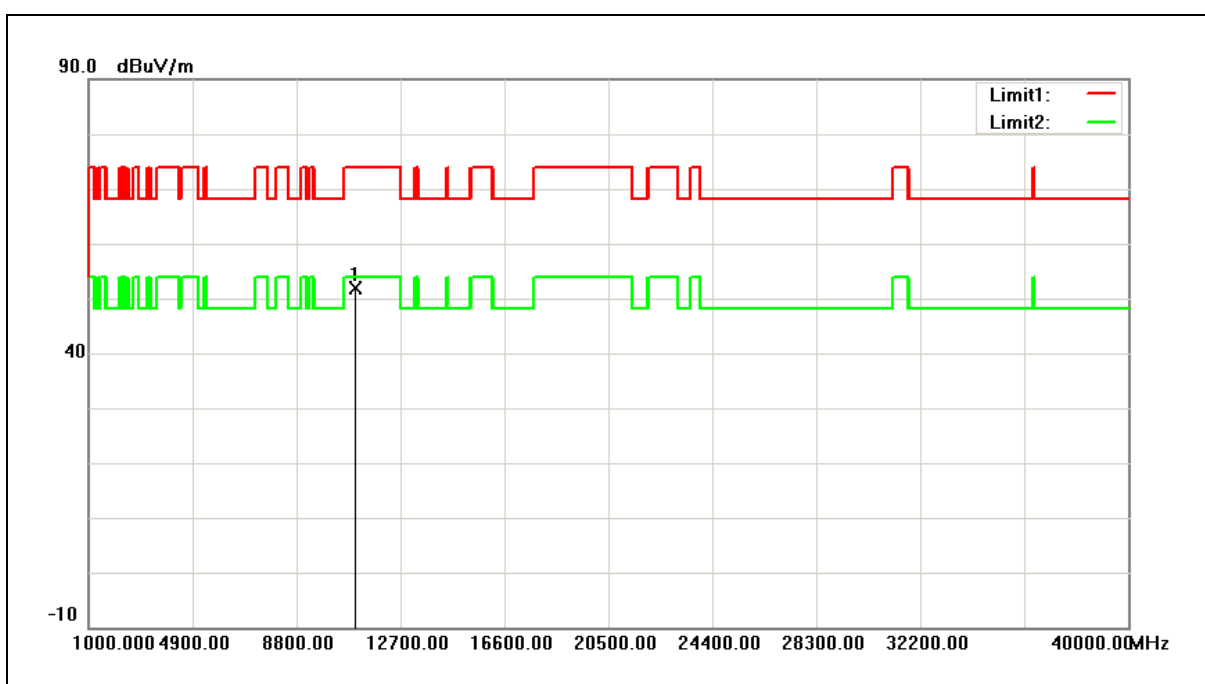


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	46.19	5.78	51.97	74.00	-22.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5500MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/10/2016
Ant.Polar.:	Vertical		

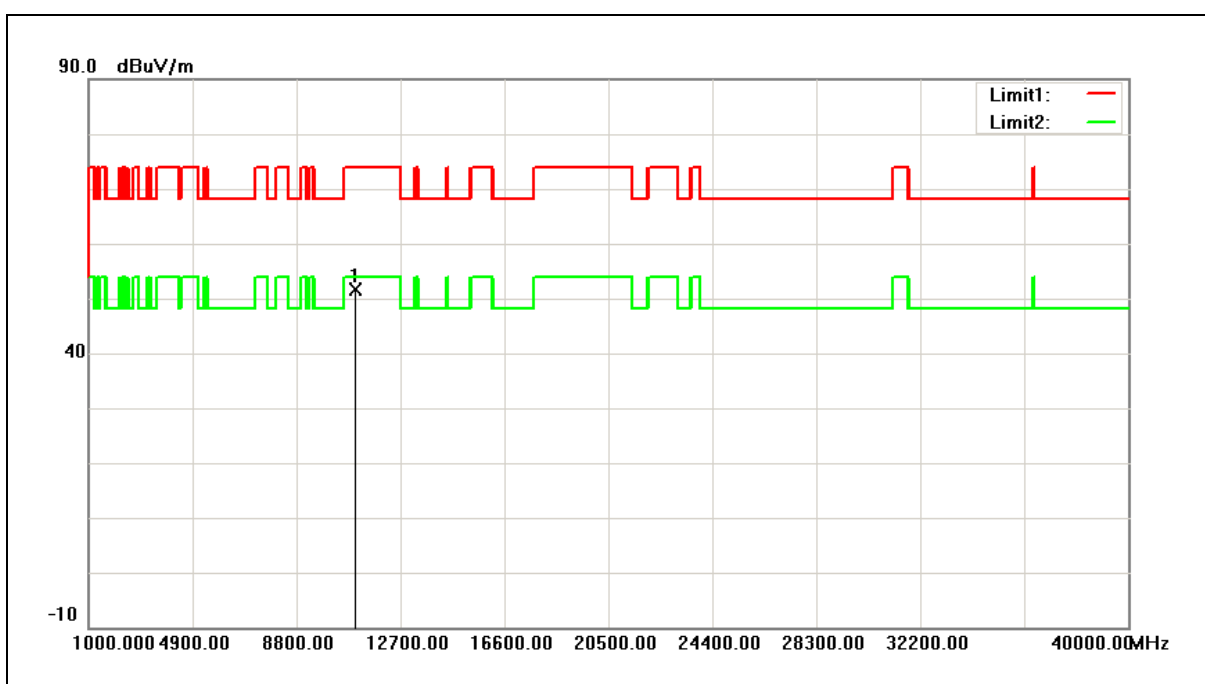


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	45.89	5.78	51.67	74.00	-22.33	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5560MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/10/2016
Ant.Polar.:	Horizontal		

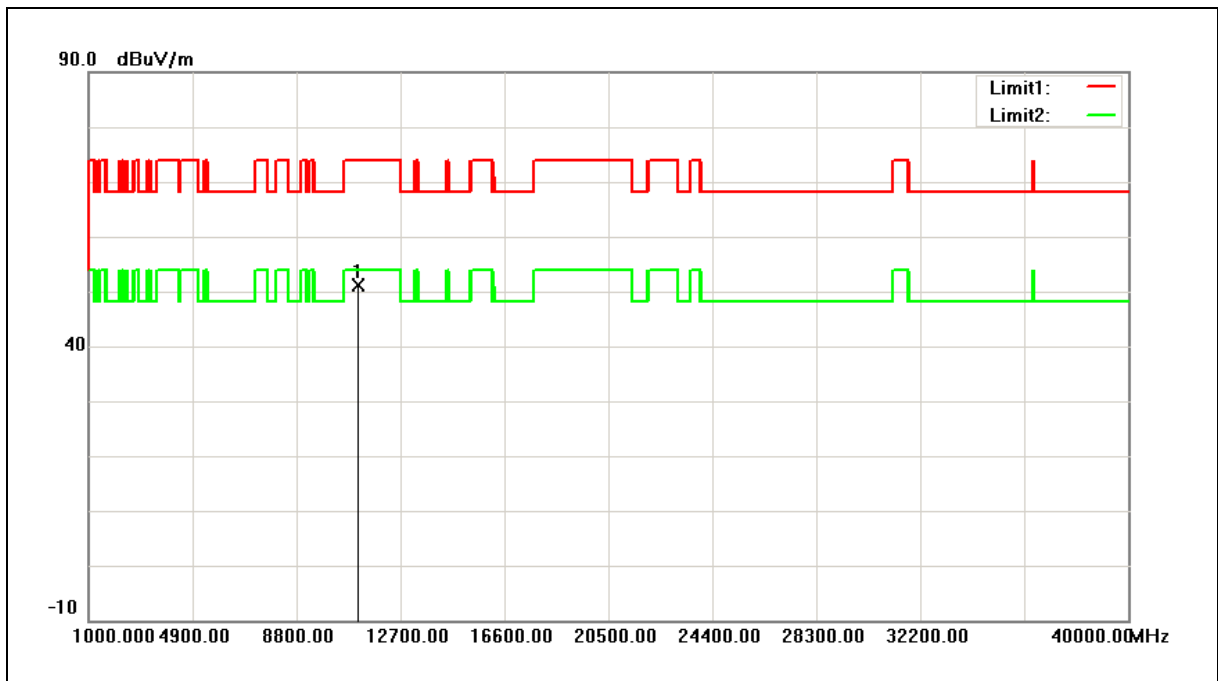


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	45.33	5.87	51.20	74.00	-22.80	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5560MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/10/2016
Ant.Polar.:	Vertical		

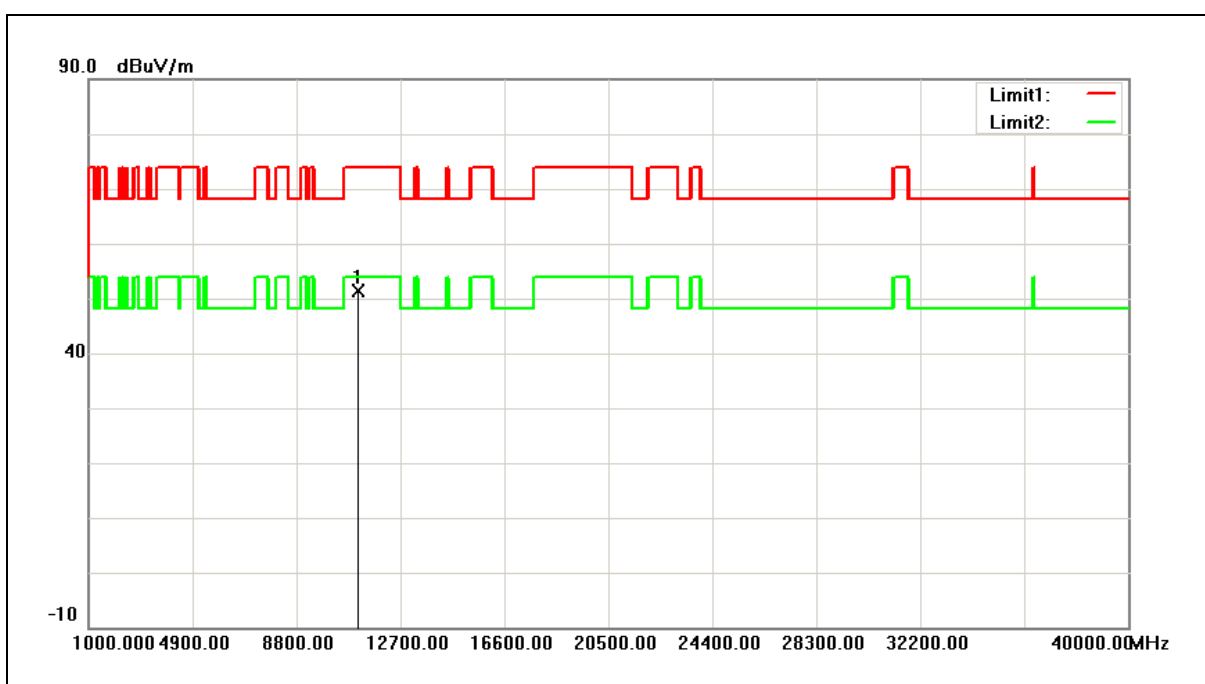


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	45.51	5.87	51.38	74.00	-22.62	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5700MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/10/2016
Ant.Polar.:	Horizontal		

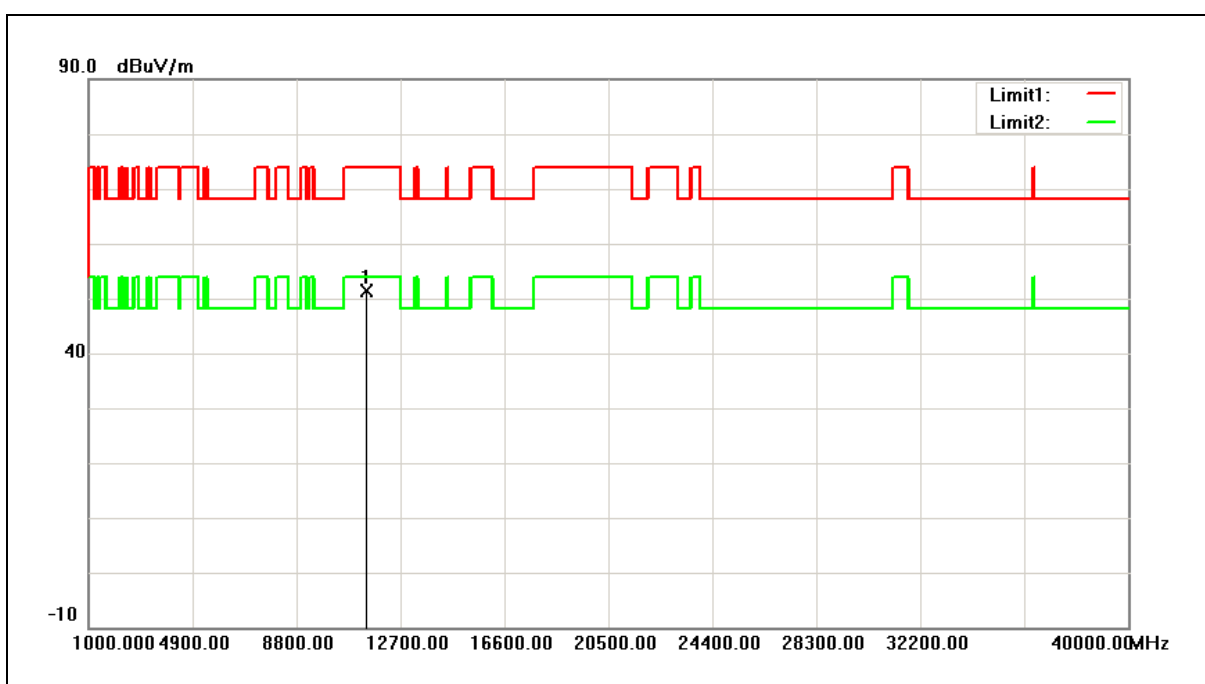


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	45.40	6.07	51.47	74.00	-22.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5700MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/10/2016
Ant.Polar.:	Vertical		

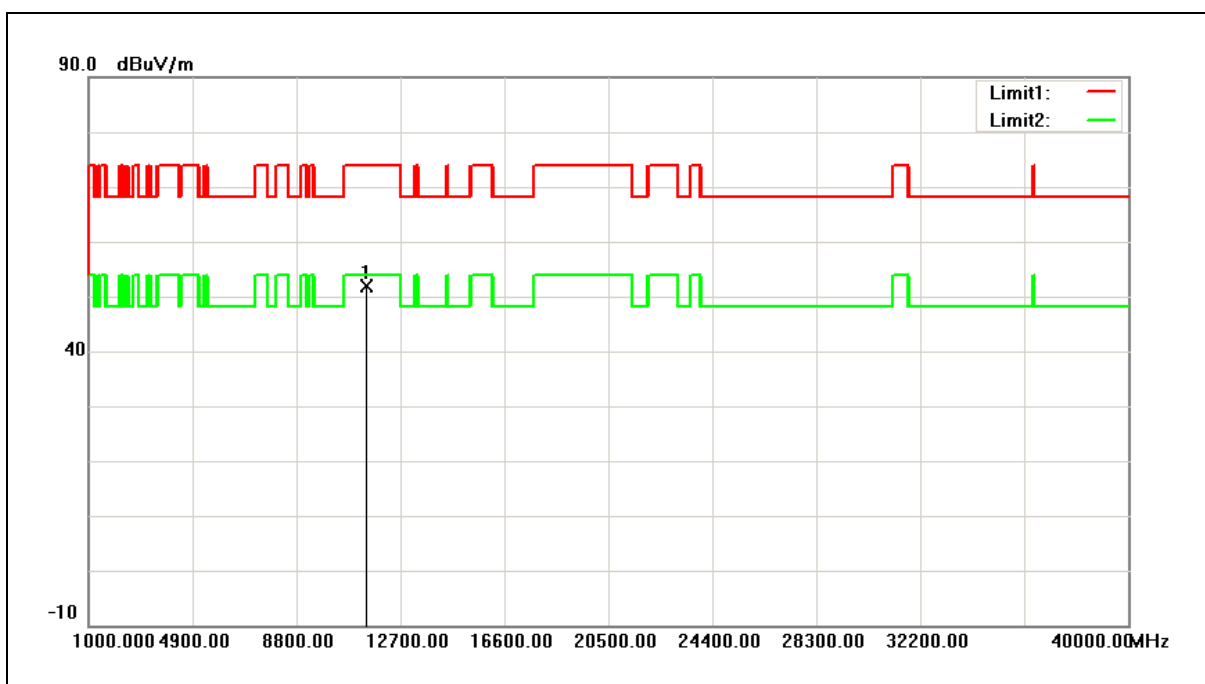


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	45.72	6.07	51.79	74.00	-22.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5745MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/10/2016
Ant.Polar.:	Horizontal		

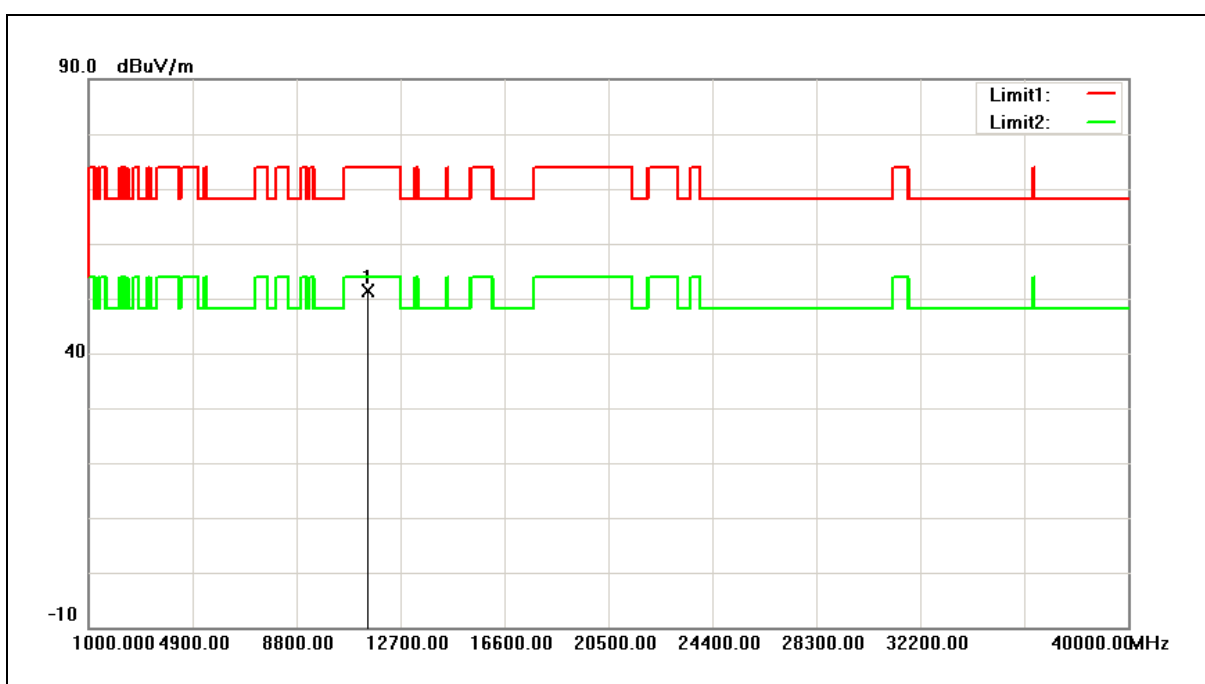


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	45.30	6.14	51.44	74.00	-22.56	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5745MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/10/2016
Ant.Polar.:	Vertical		

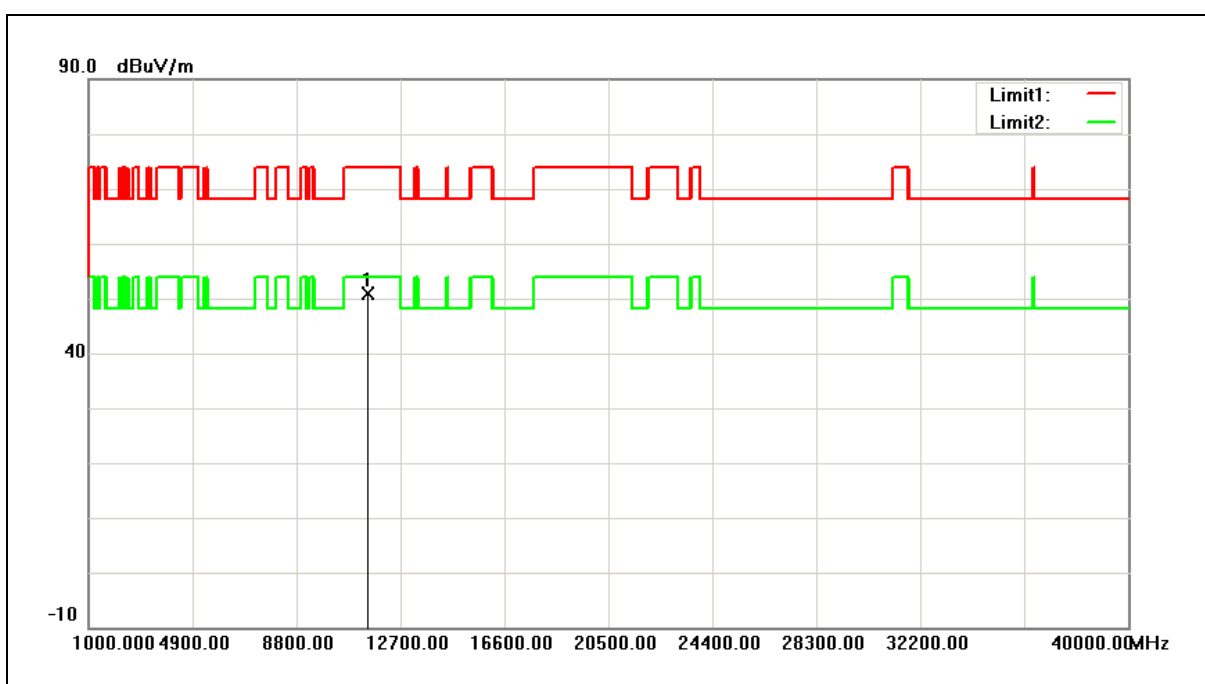


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	44.83	6.14	50.97	74.00	-23.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/10/2016
Ant.Polar.:	Horizontal		

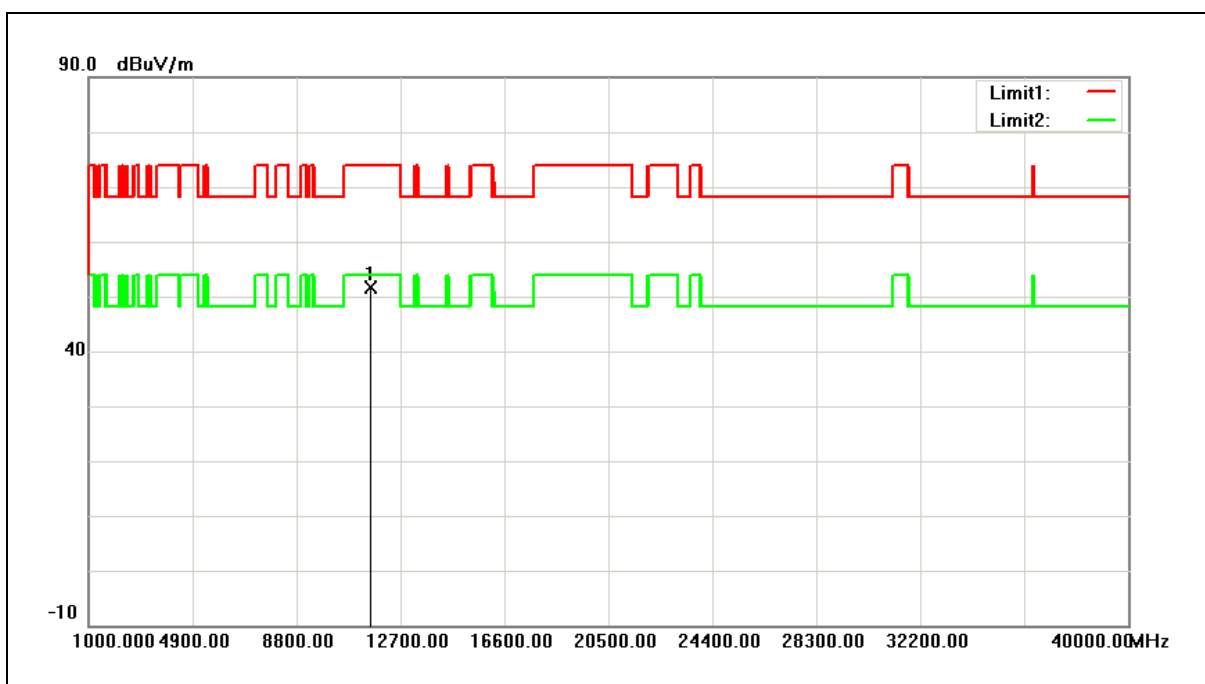


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	45.31	6.35	51.66	74.00	-22.34	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/10/2016
Ant.Polar.:	Vertical		

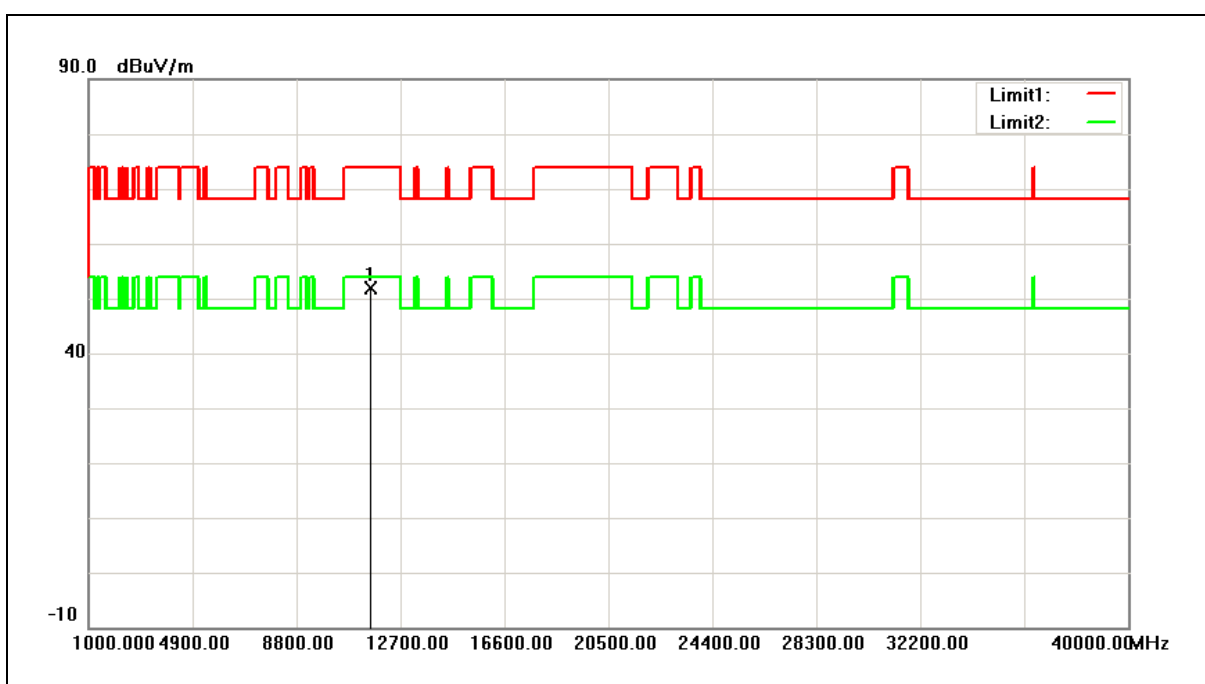


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	45.61	6.35	51.96	74.00	-22.04	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5825MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/10/2016
Ant.Polar.:	Horizontal		

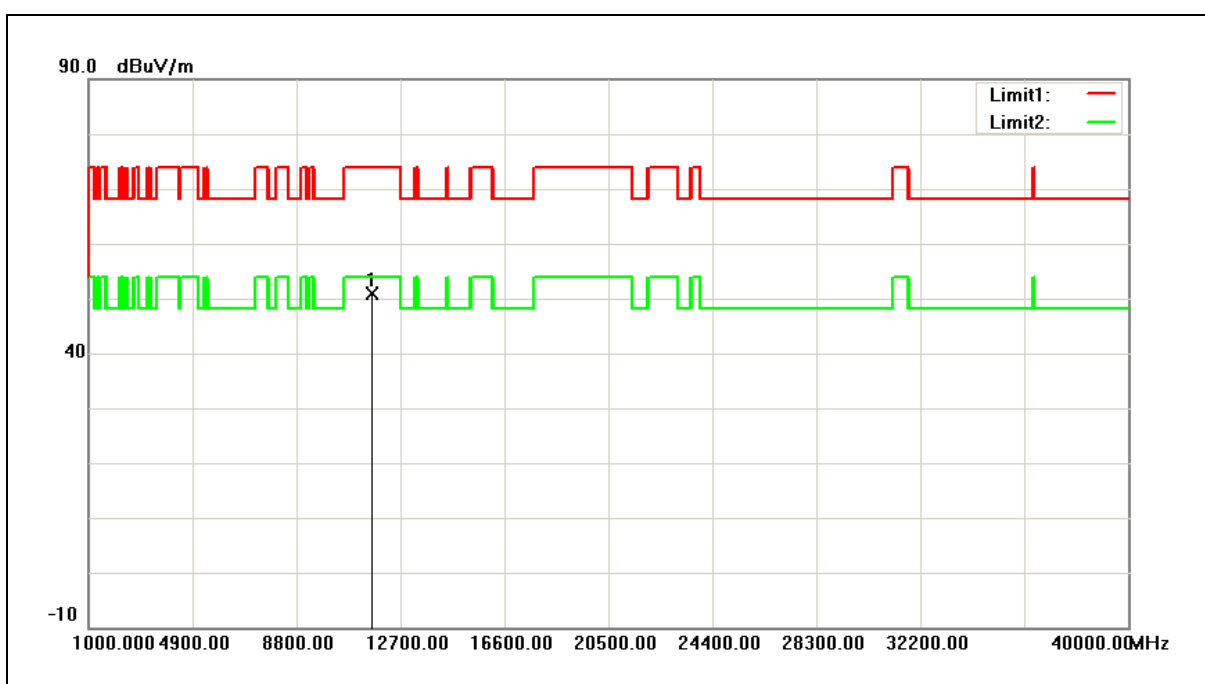


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	44.31	6.58	50.89	74.00	-23.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5825MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/10/2016
Ant.Polar.:	Vertical		

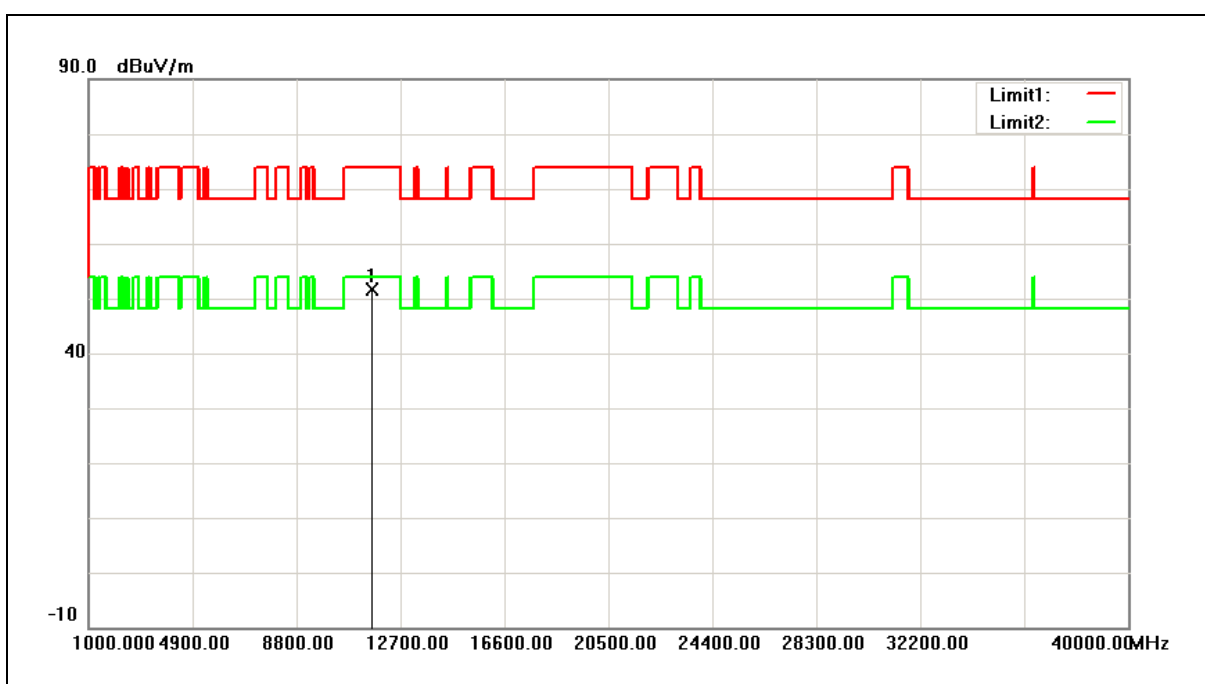


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	45.10	6.58	51.68	74.00	-22.32	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5190MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/10/2016
Ant.Polar.:	Horizontal		

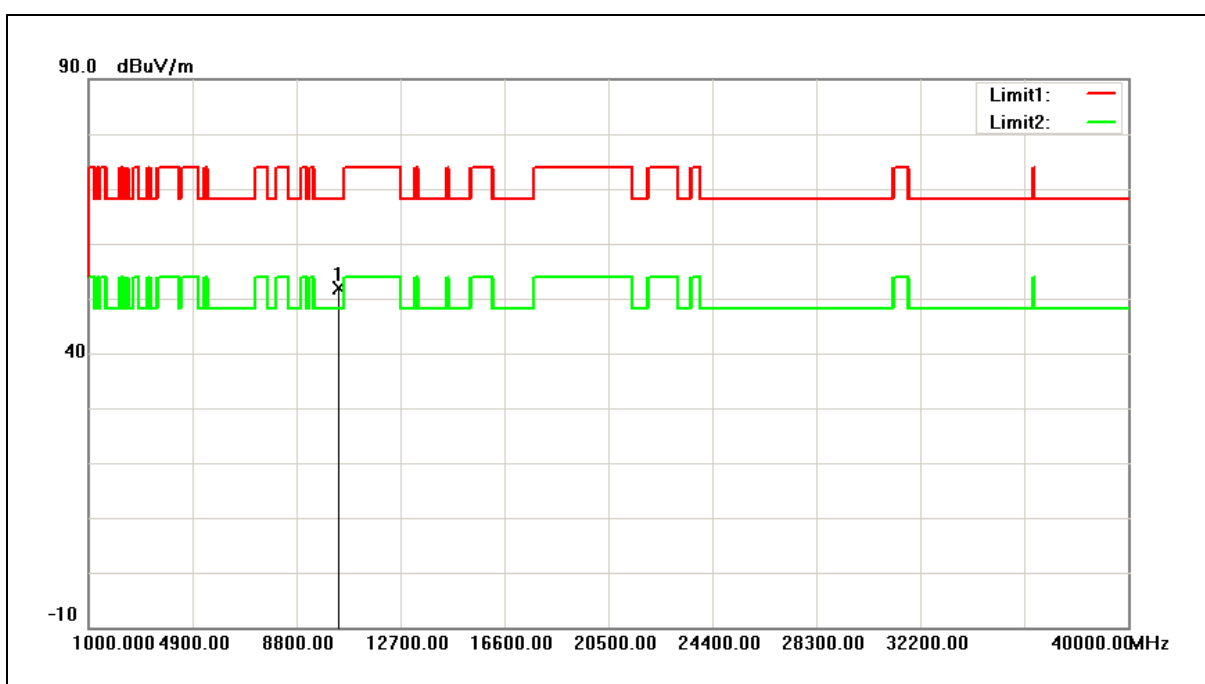


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	46.81	5.01	51.82	68.20	-16.38	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5190MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/10/2016
Ant.Polar.:	Vertical		

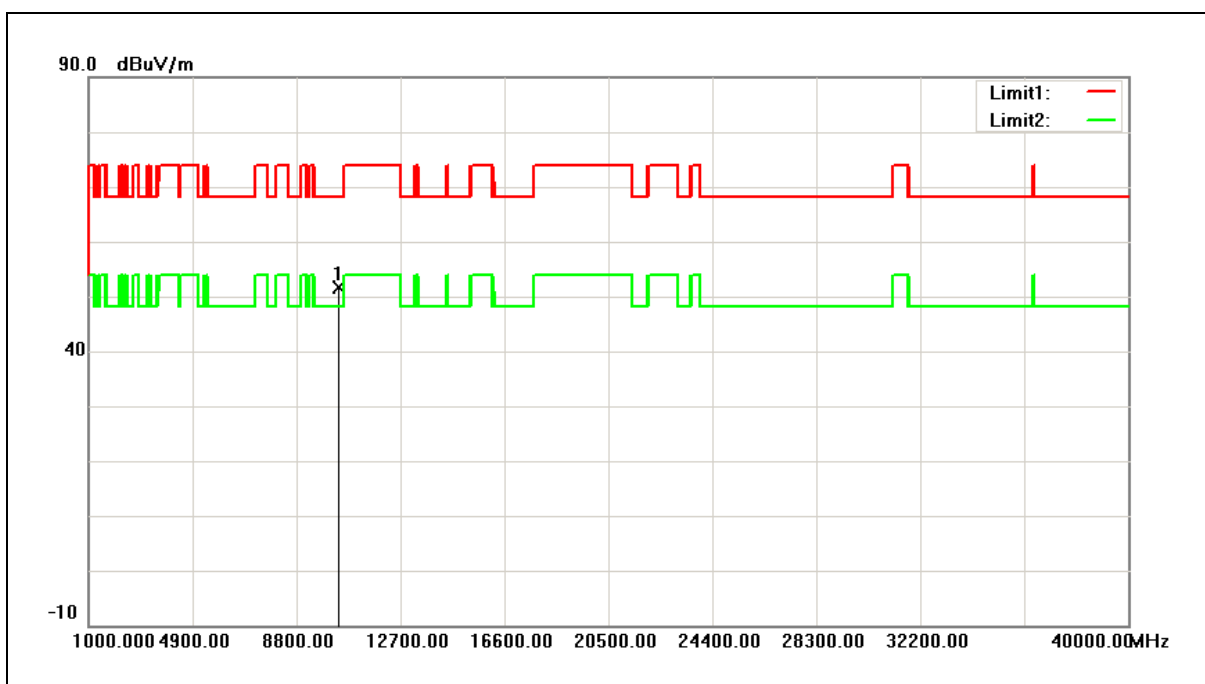


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	46.65	5.01	51.66	68.20	-16.54	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5230MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/10/2016
Ant.Polar.:	Horizontal		

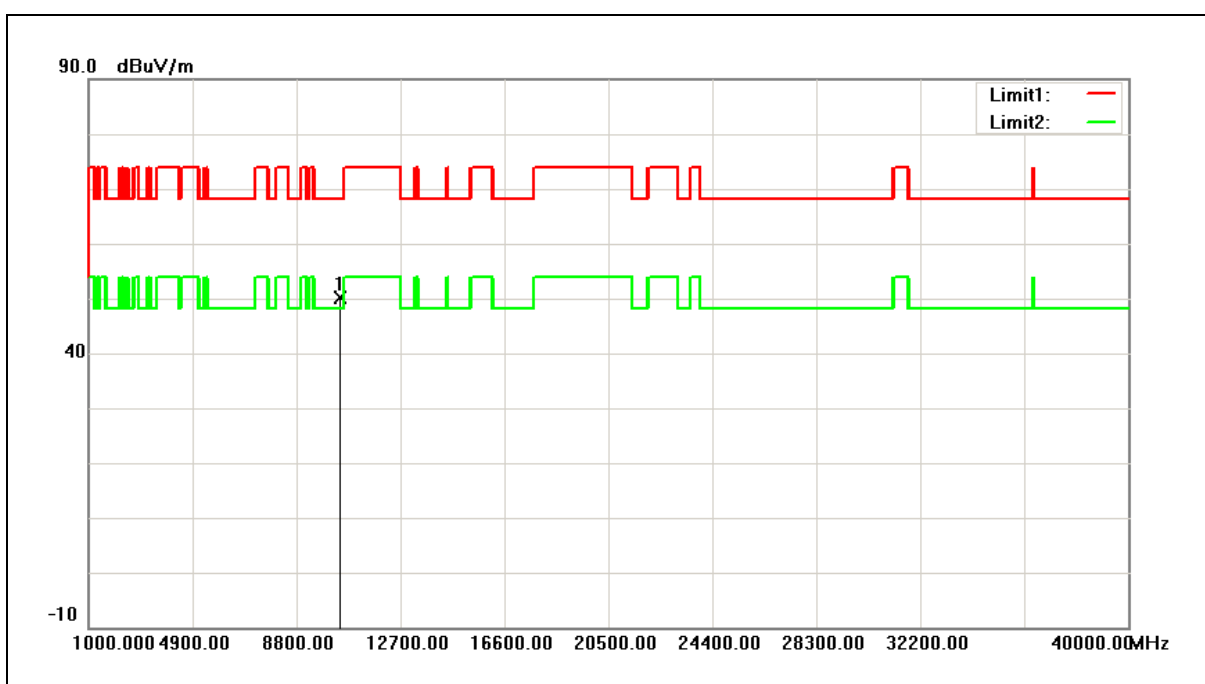


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	44.81	5.22	50.03	68.20	-18.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5230MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/10/2016
Ant.Polar.:	Vertical		

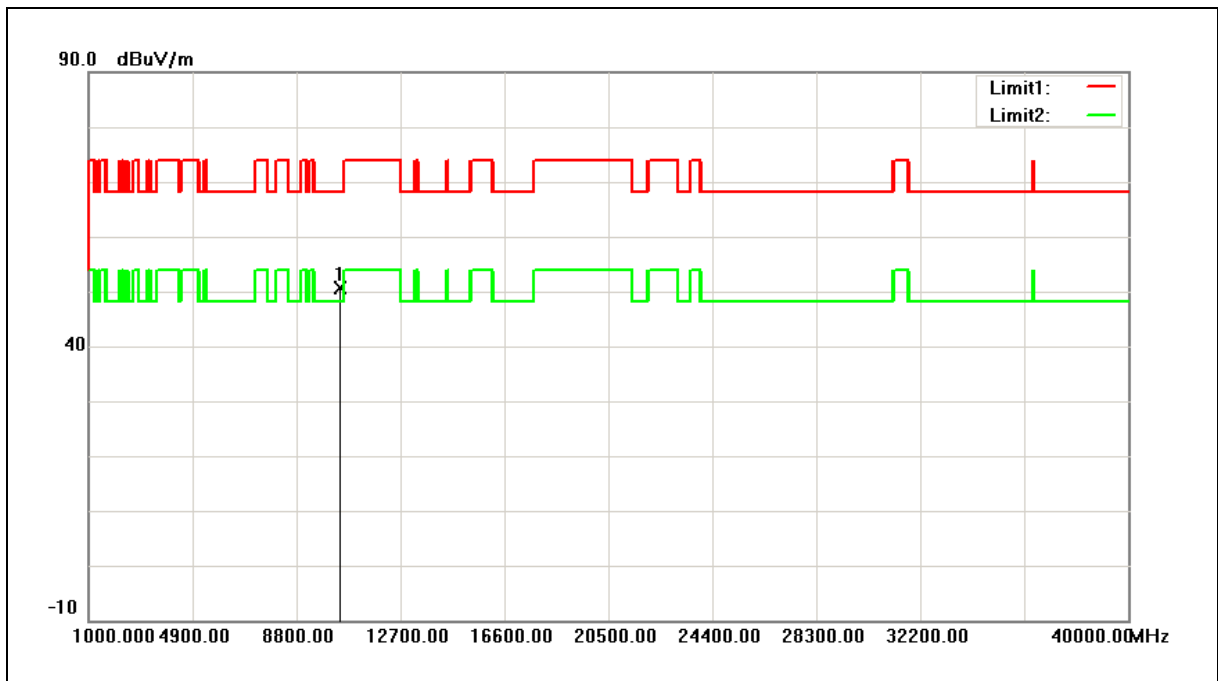


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	45.31	5.22	50.53	68.20	-17.67	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5270MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/10/2016
Ant.Polar.:	Horizontal		

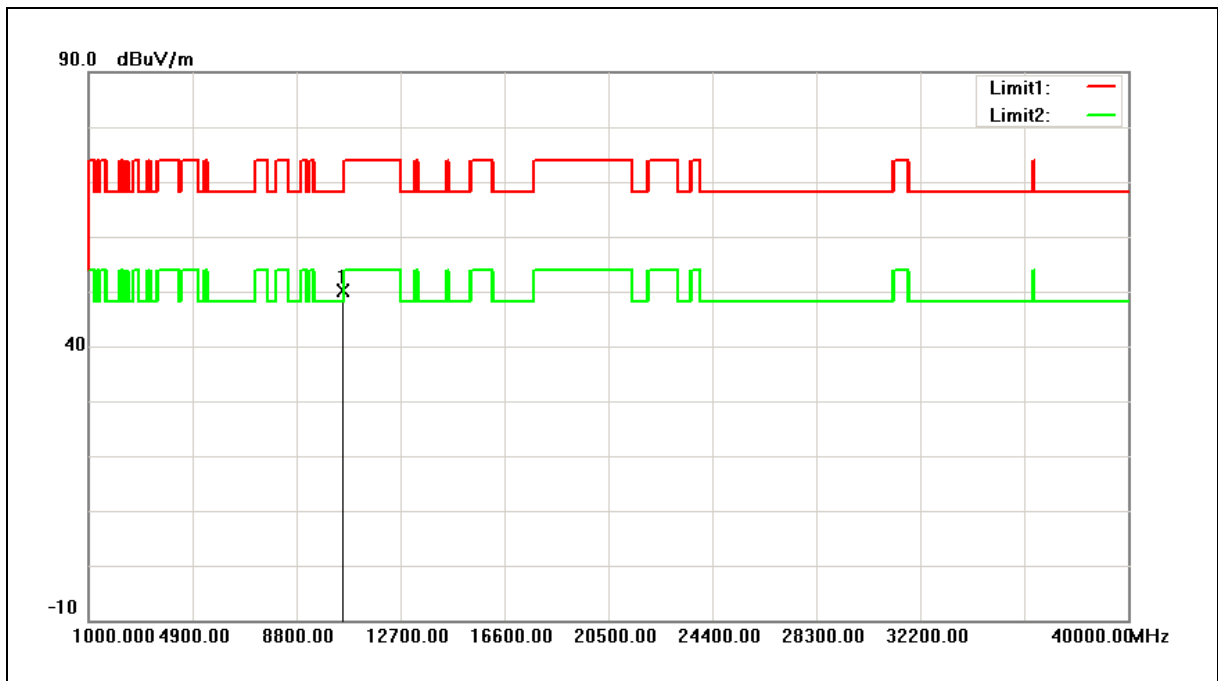


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	44.88	5.35	50.23	68.20	-17.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5270MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/10/2016
Ant.Polar.:	Vertical		

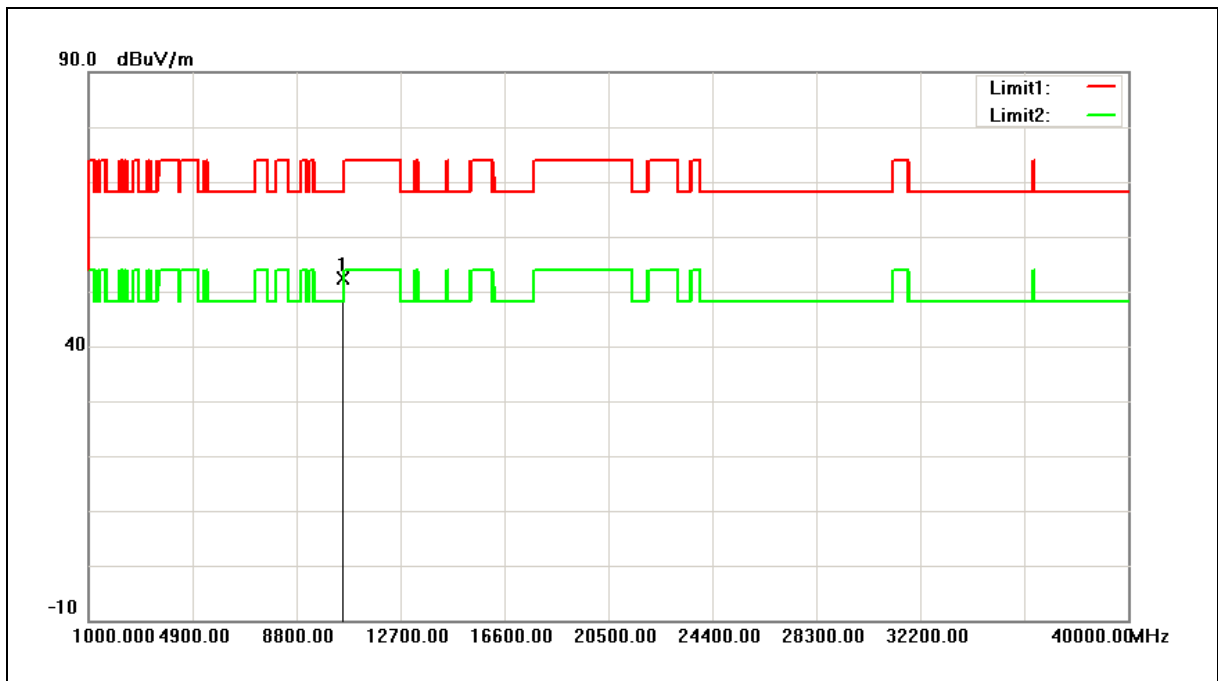


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	47.05	5.35	52.40	68.20	-15.80	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5310MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/10/2016
Ant.Polar.:	Horizontal		

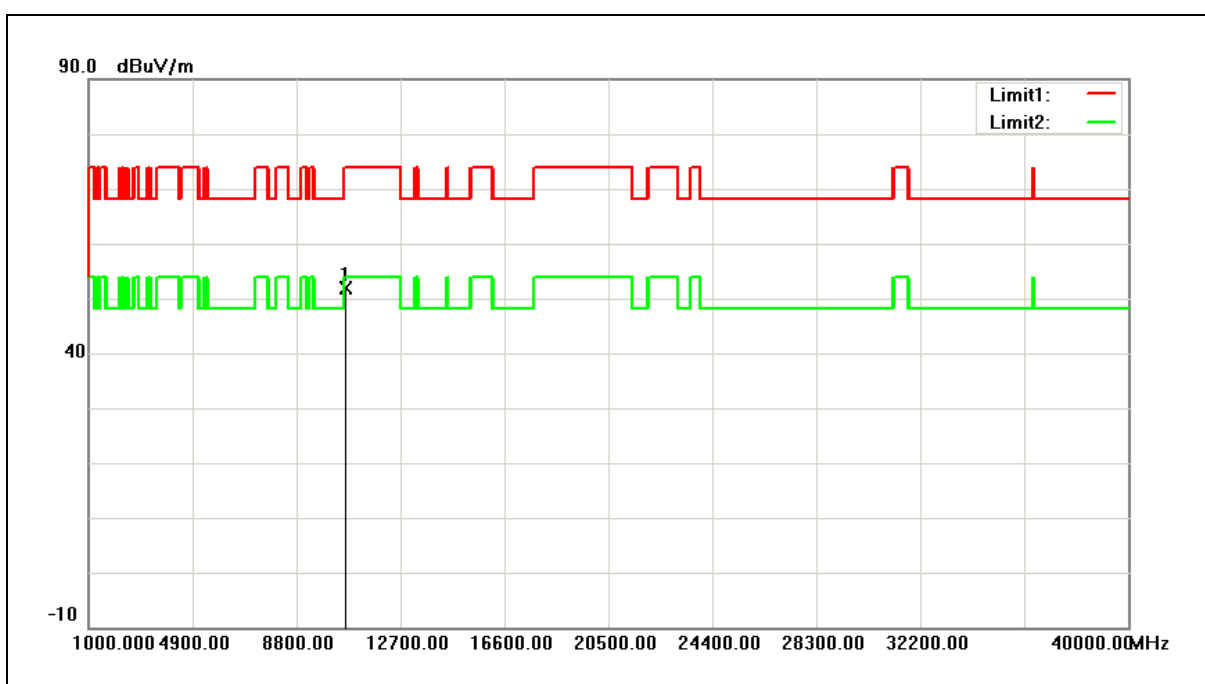


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	46.40	5.42	51.82	74.00	-22.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5310MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/10/2016
Ant.Polar.:	Vertical		

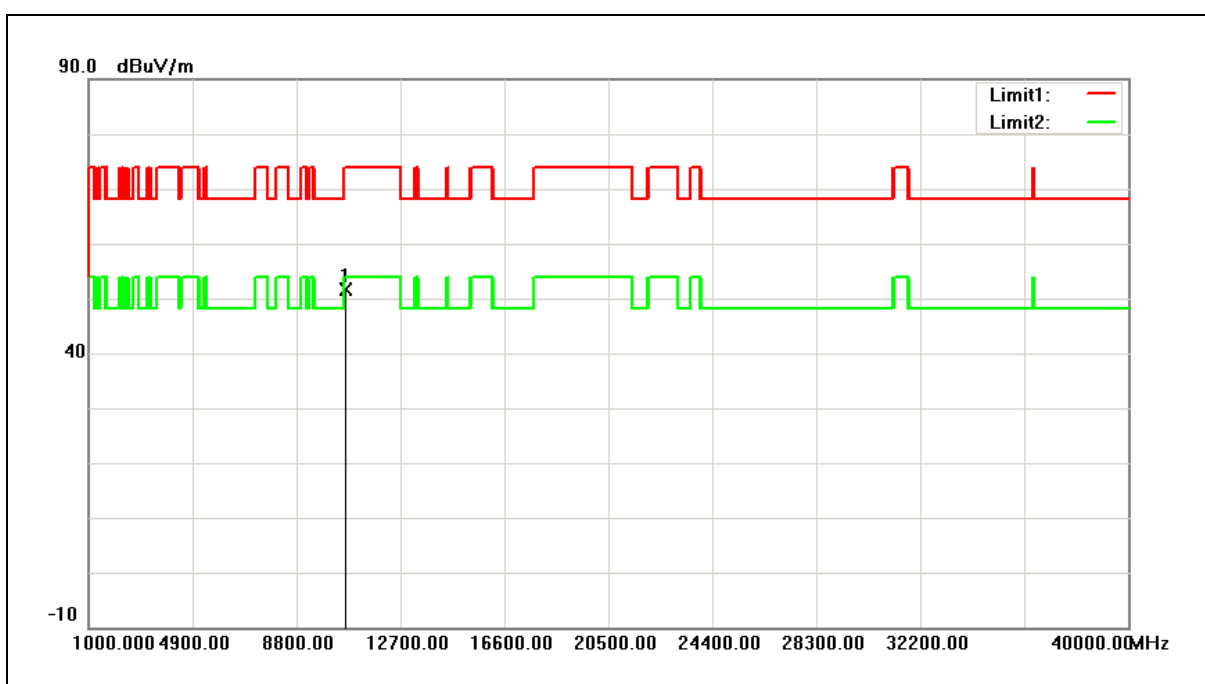


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	46.29	5.45	51.74	74.00	-22.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5510MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/10/2016
Ant.Polar.:	Horizontal		

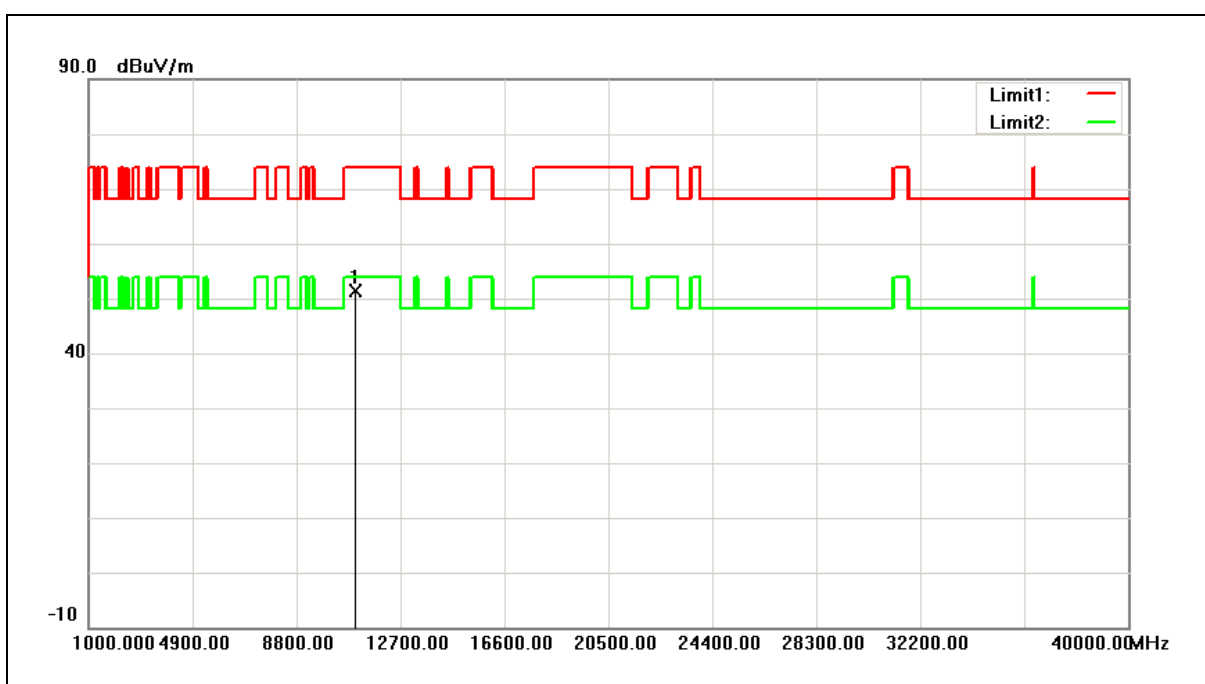


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	45.68	5.80	51.48	74.00	-22.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5510MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/10/2016
Ant.Polar.:	Vertical		

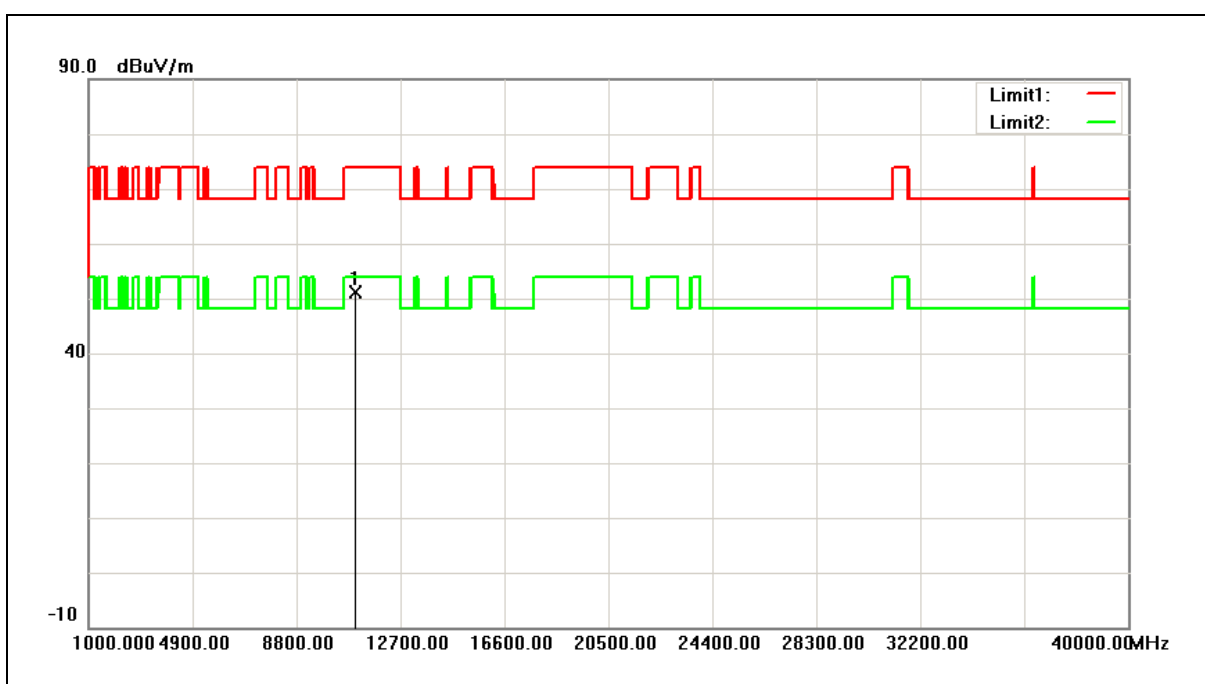


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	45.40	5.80	51.20	74.00	-22.80	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5550MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/10/2016
Ant.Polar.:	Horizontal		

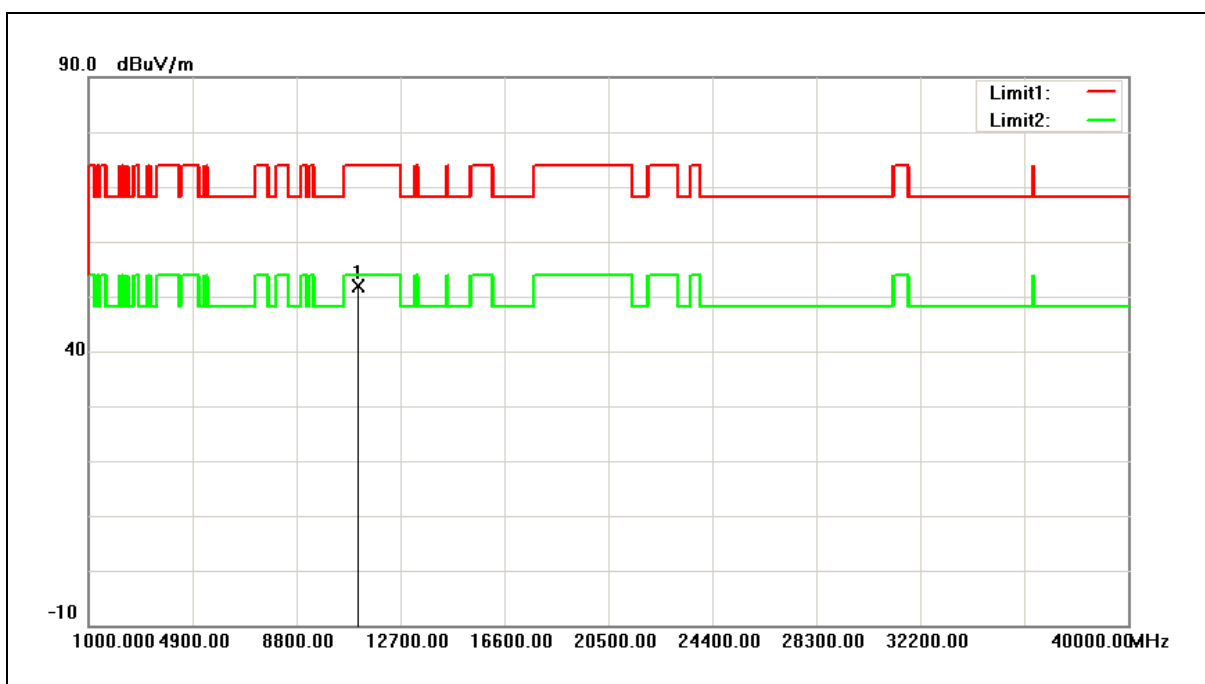


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	46.02	5.85	51.87	74.00	-22.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5550MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/10/2016
Ant.Polar.:	Vertical		

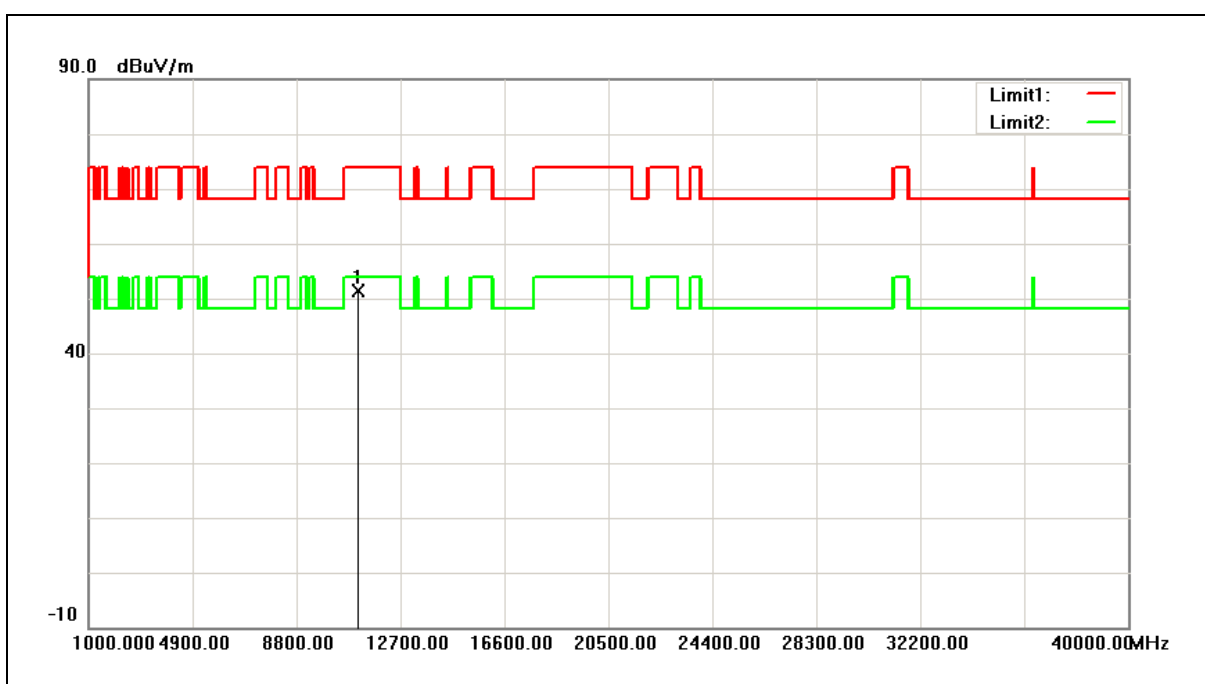


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	45.52	5.85	51.37	74.00	-22.63	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5670MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/10/2016
Ant.Polar.:	Horizontal		

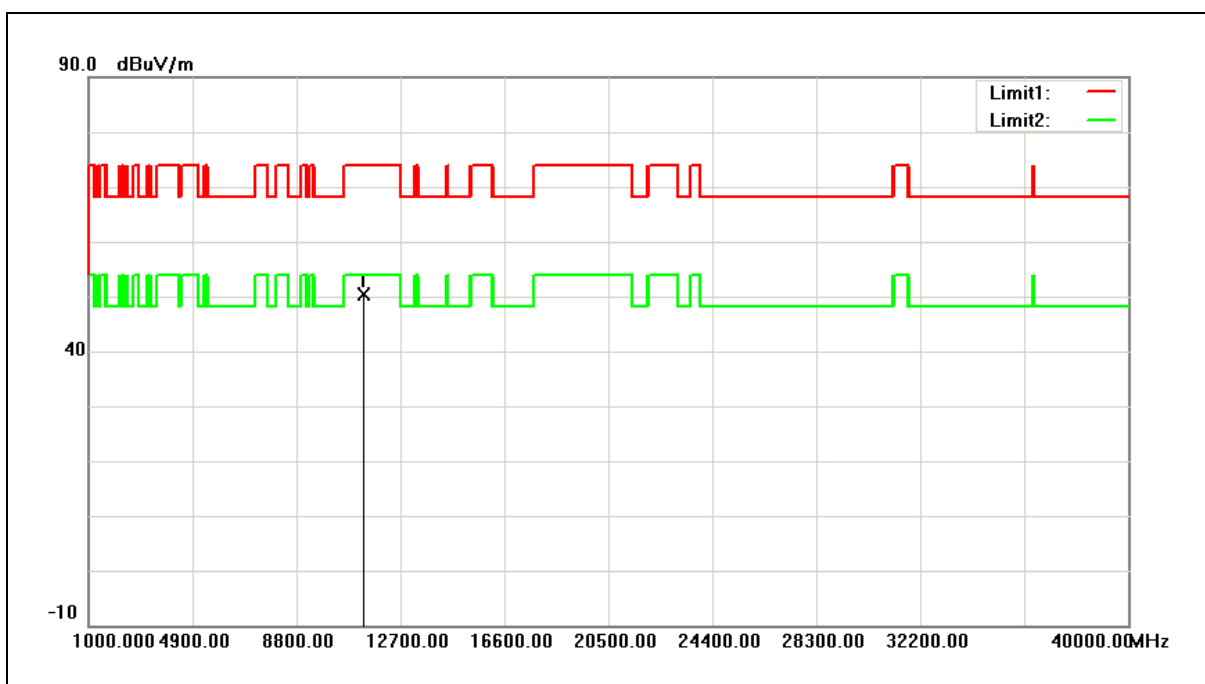


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	44.41	6.03	50.44	74.00	-23.56	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5670MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/10/2016
Ant.Polar.:	Vertical		

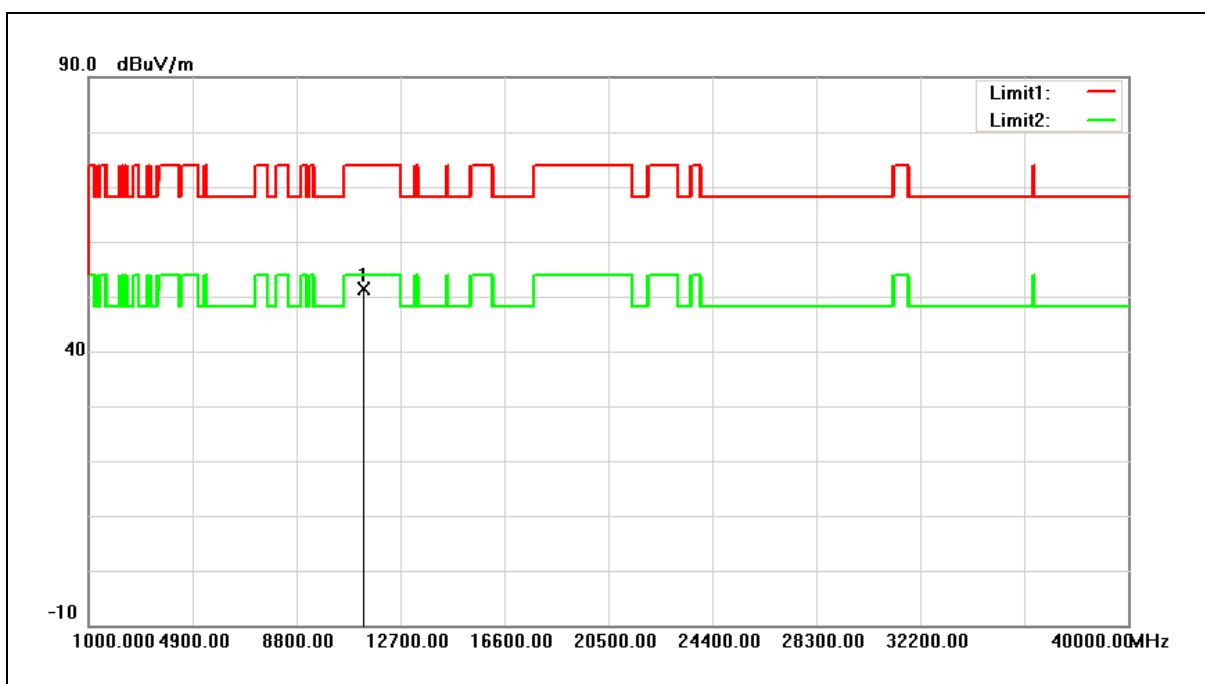


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	45.38	6.03	51.41	74.00	-22.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5755MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/10/2016
Ant.Polar.:	Horizontal		

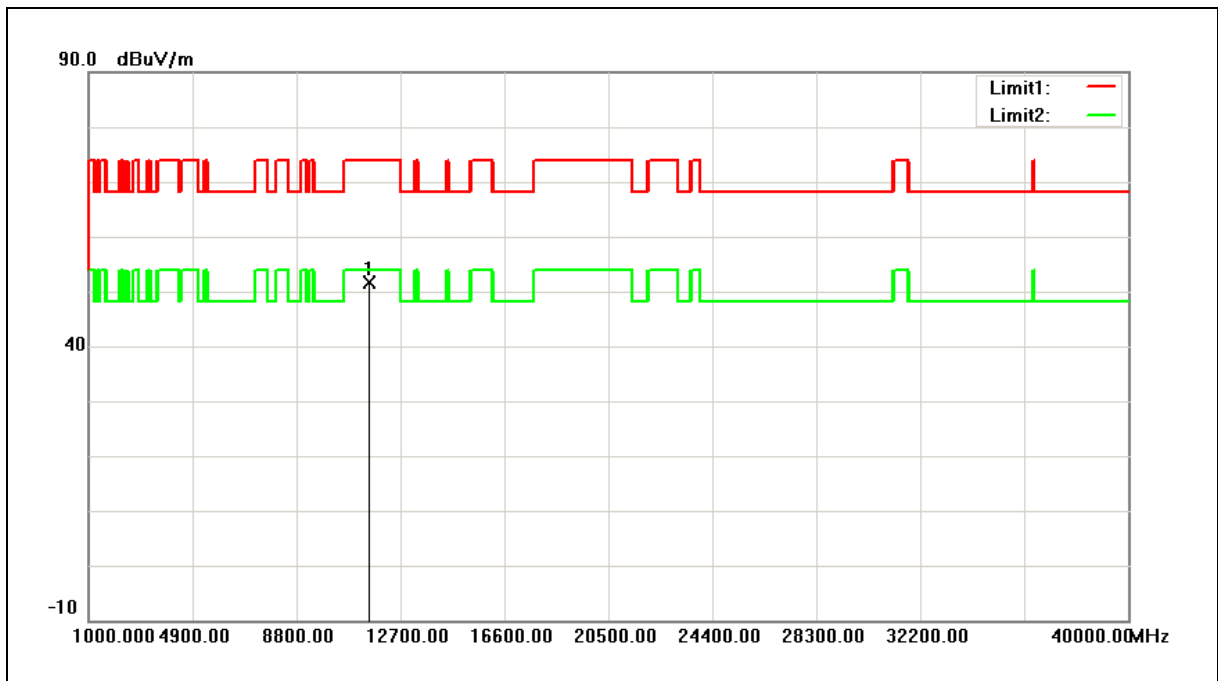


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	45.40	6.17	51.57	74.00	-22.43	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5755MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/10/2016
Ant.Polar.:	Vertical		

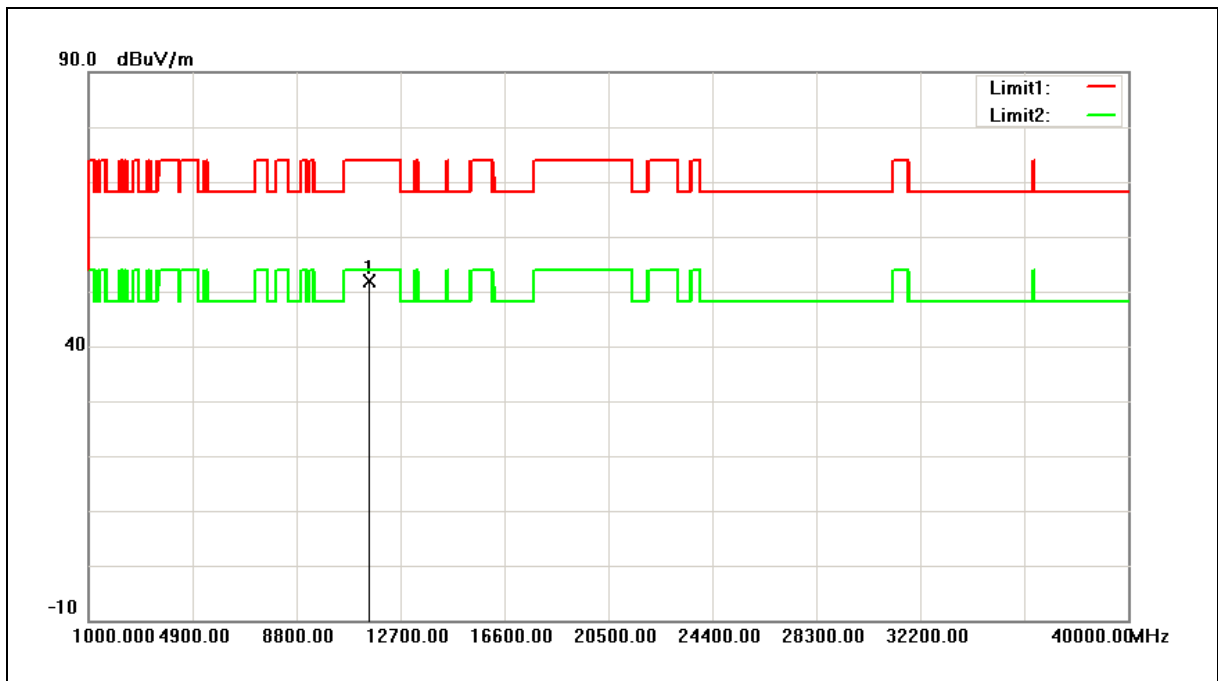


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	45.72	6.17	51.89	74.00	-22.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5795MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/10/2016
Ant.Polar.:	Horizontal		

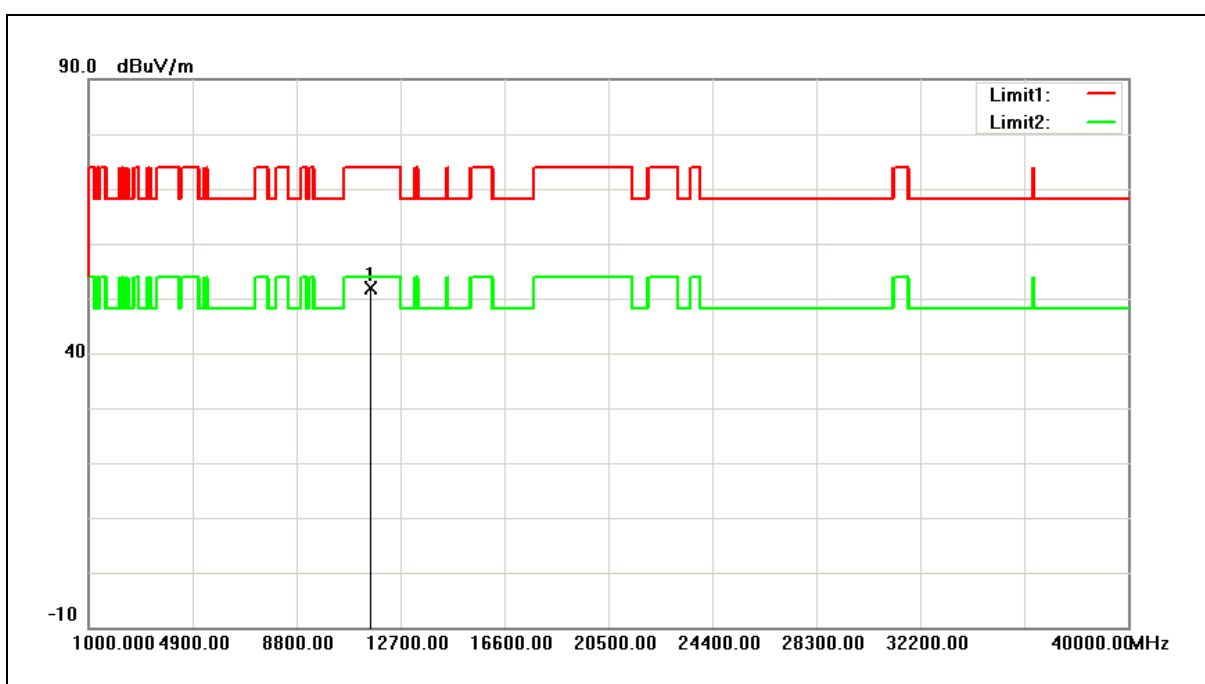


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	45.53	6.41	51.94	74.00	-22.06	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5795MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/10/2016
Ant.Polar.:	Vertical		

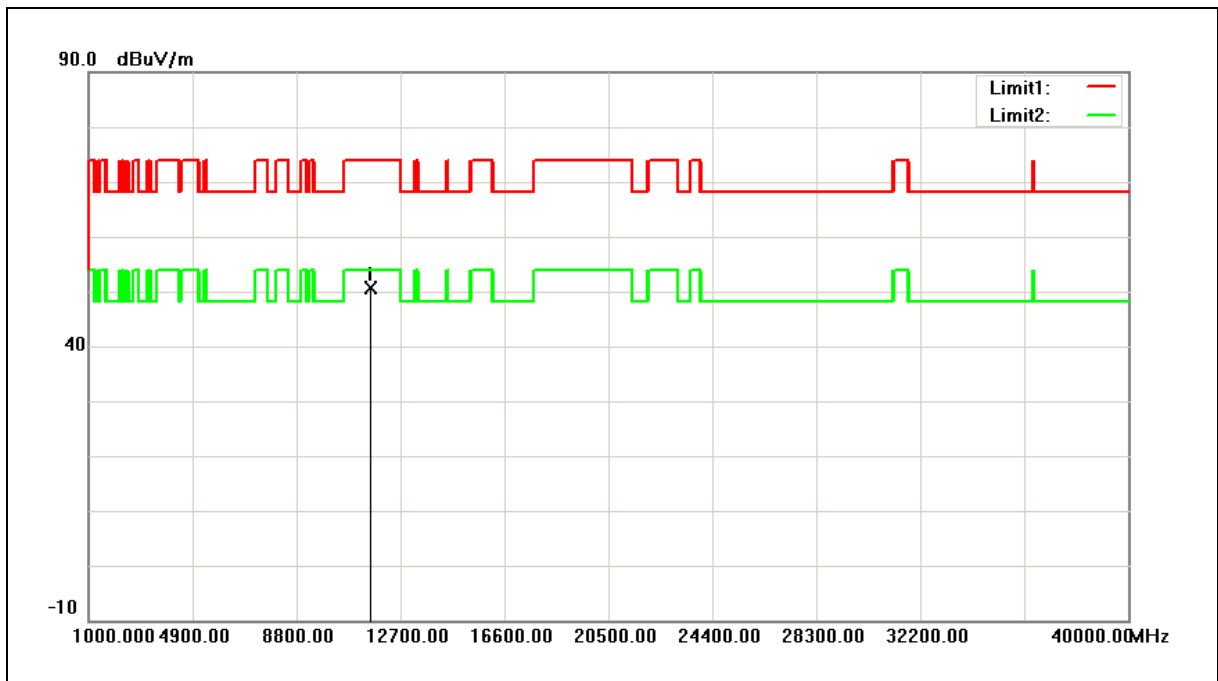


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	44.28	6.41	50.69	74.00	-23.31	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5210MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	12/10/2016
Ant.Polar.:	Horizontal		

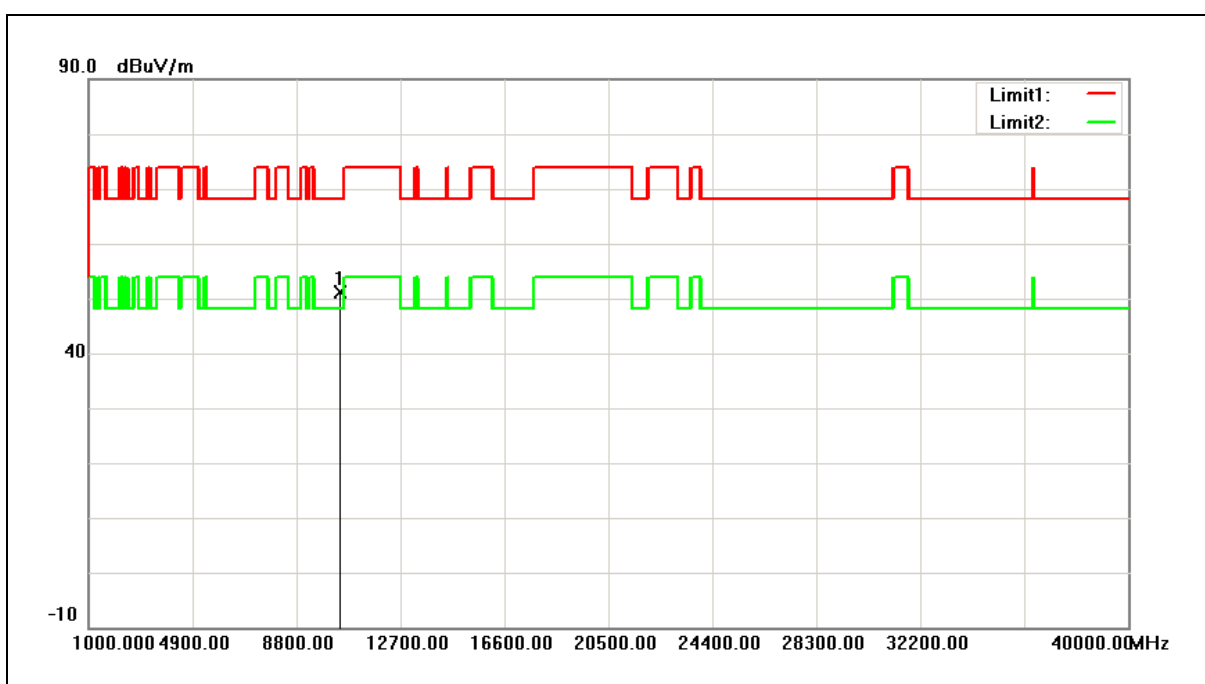


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	46.12	5.11	51.23	68.20	-16.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5210MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	12/10/2016
Ant.Polar.:	Vertical		

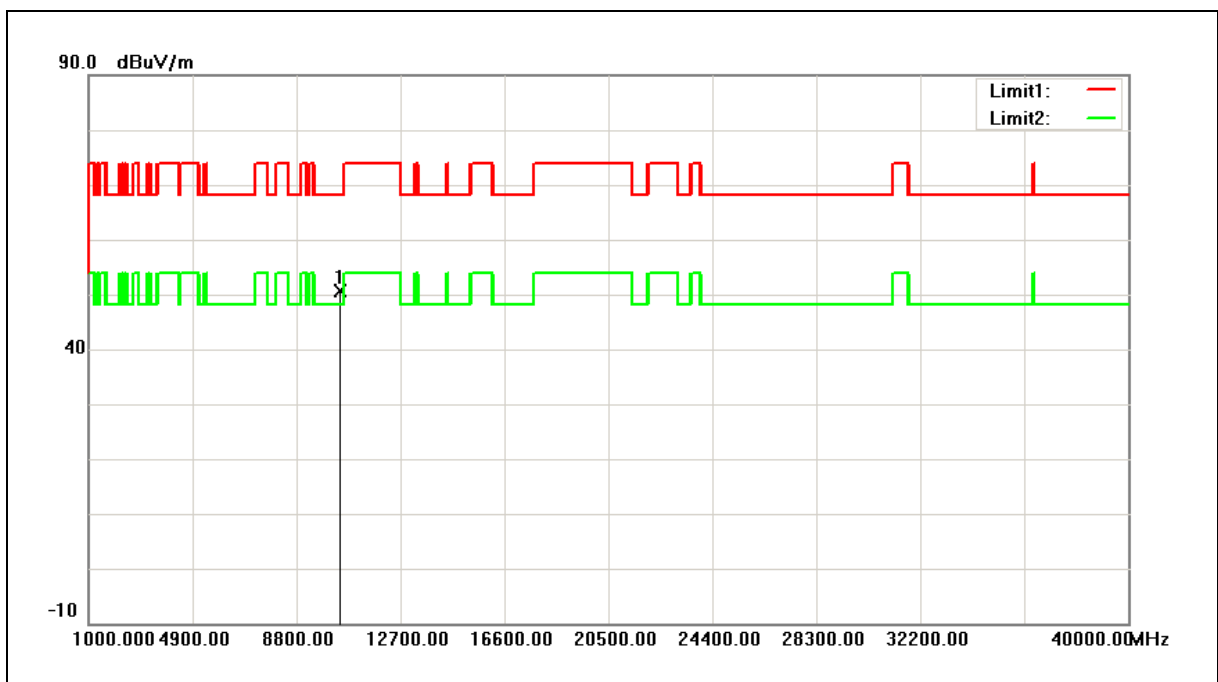


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	45.60	5.11	50.71	68.20	-17.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5290MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	12/10/2016
Ant.Polar.:	Horizontal		

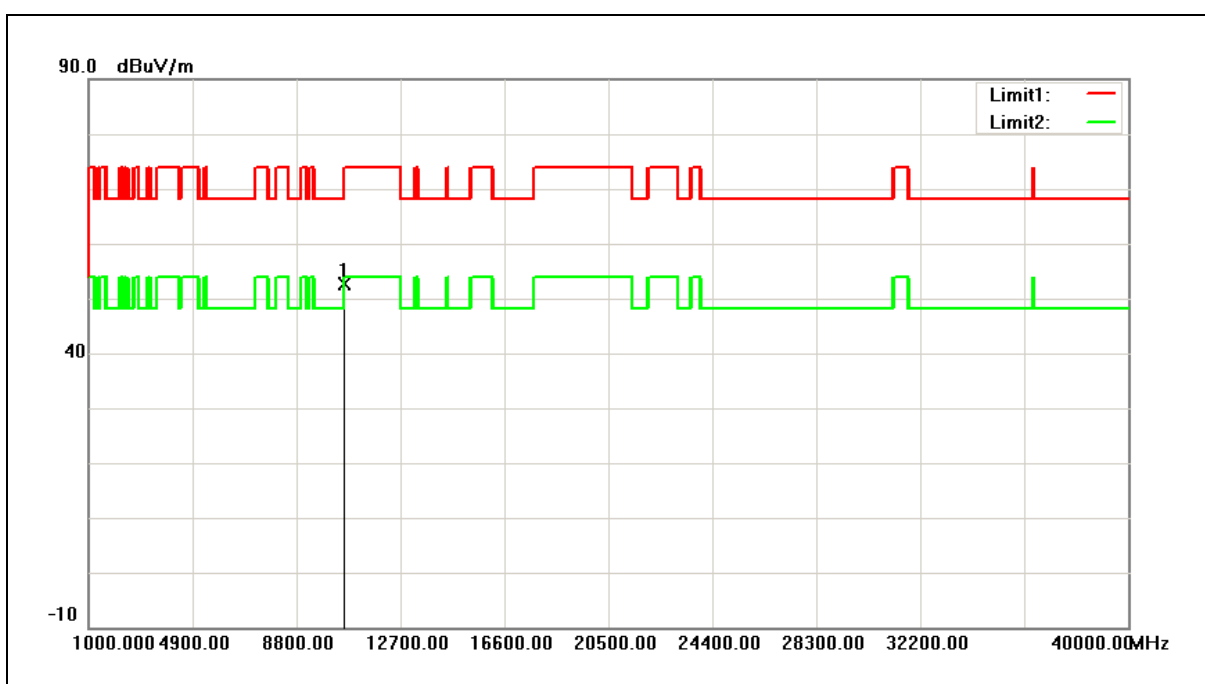


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	47.14	5.39	52.53	68.20	-15.67	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5290MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	12/10/2016
Ant.Polar.:	Vertical		

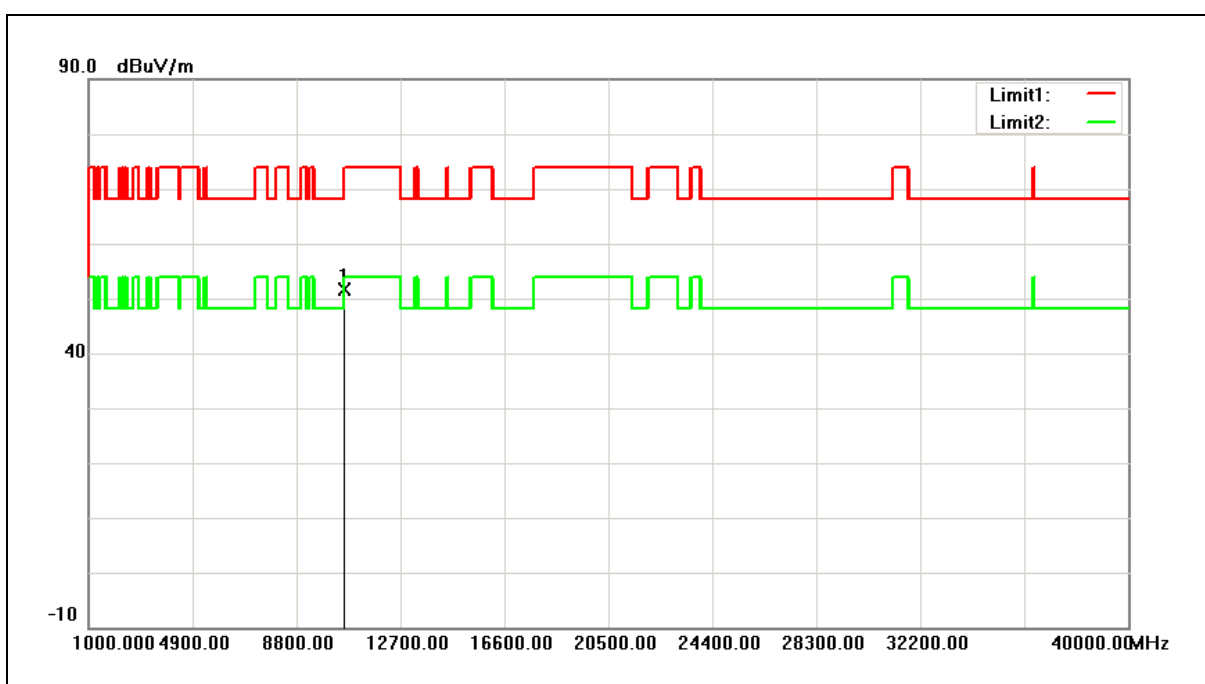


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	46.25	5.39	51.64	68.20	-16.56	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5530MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	12/10/2016
Ant.Polar.:	Horizontal		

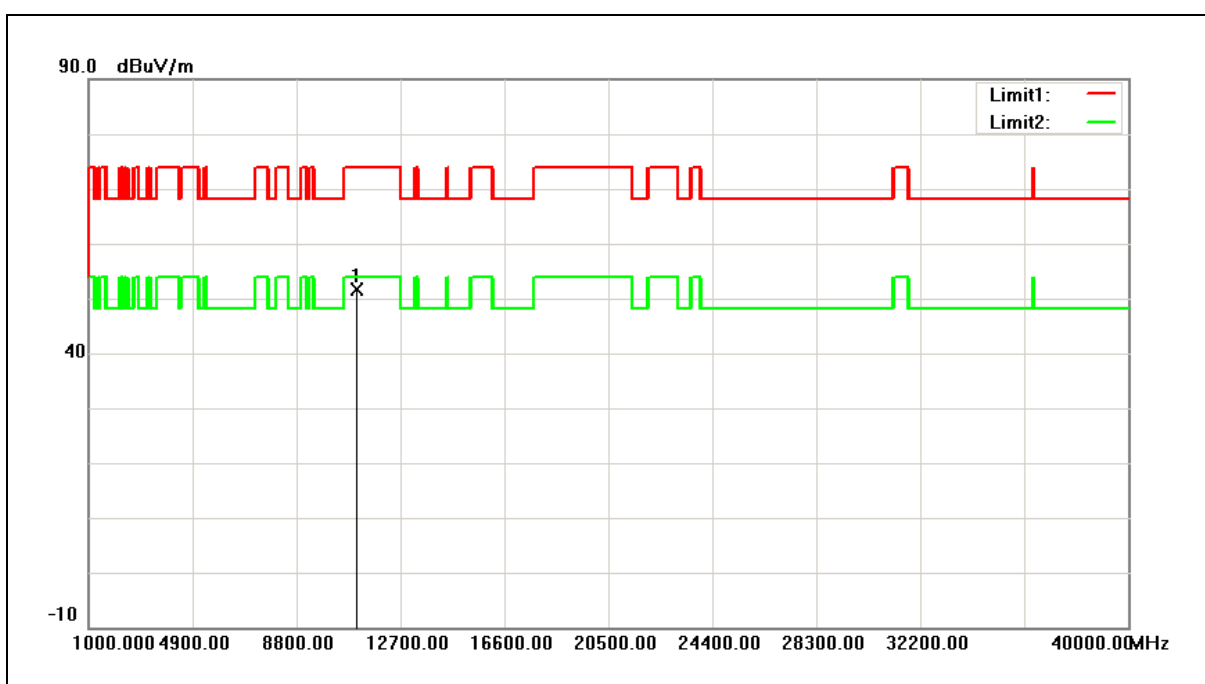


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	45.85	5.82	51.67	74.00	-22.33	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5530MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	12/10/2016
Ant.Polar.:	Vertical		

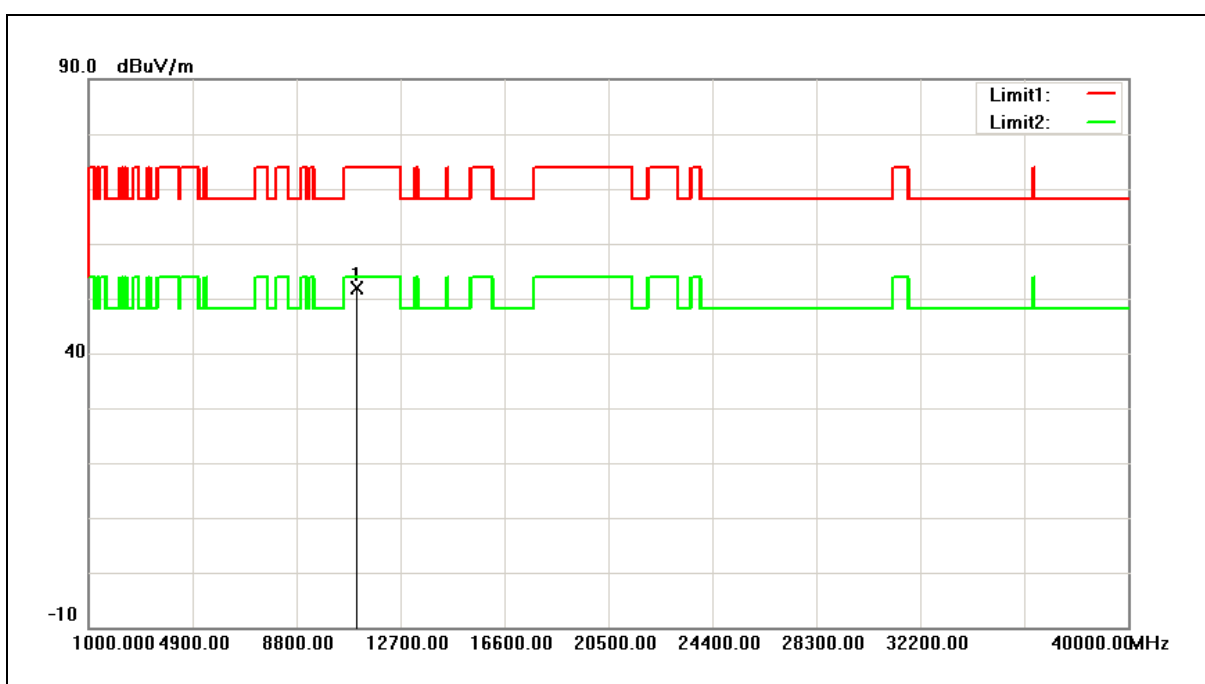


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	46.05	5.82	51.87	74.00	-22.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5775MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	12/10/2016
Ant.Polar.:	Horizontal		

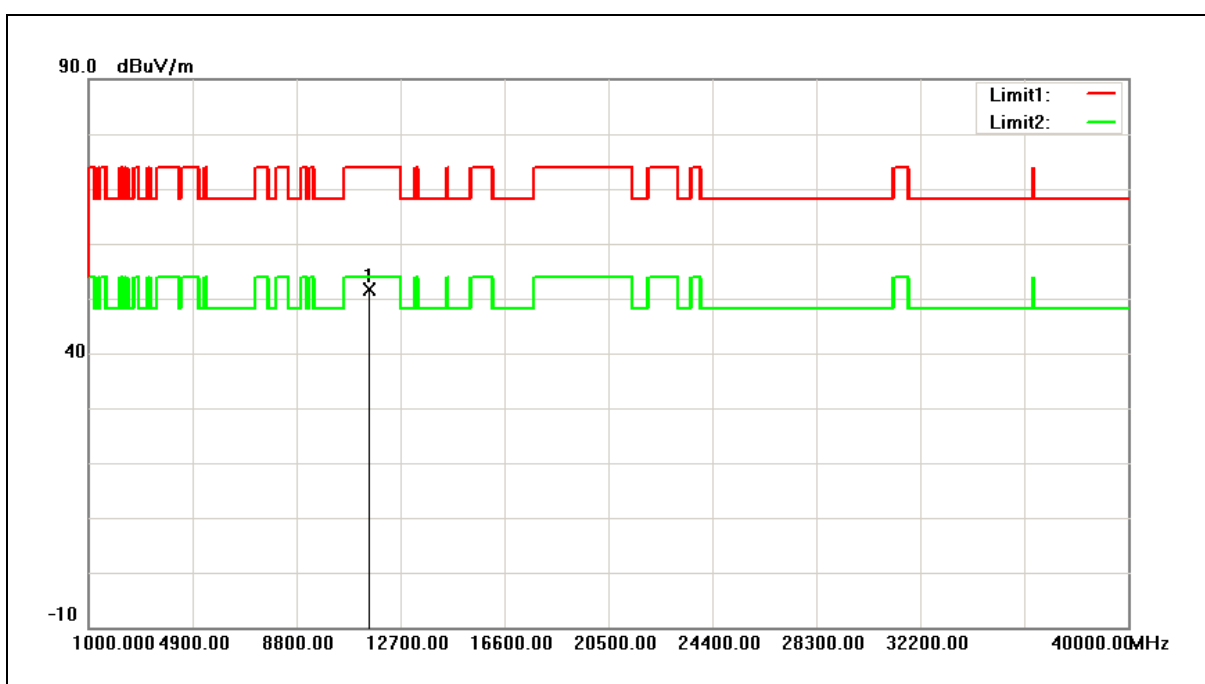


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	45.45	6.29	51.74	74.00	-22.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5775MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	12/10/2016
Ant.Polar.:	Vertical		

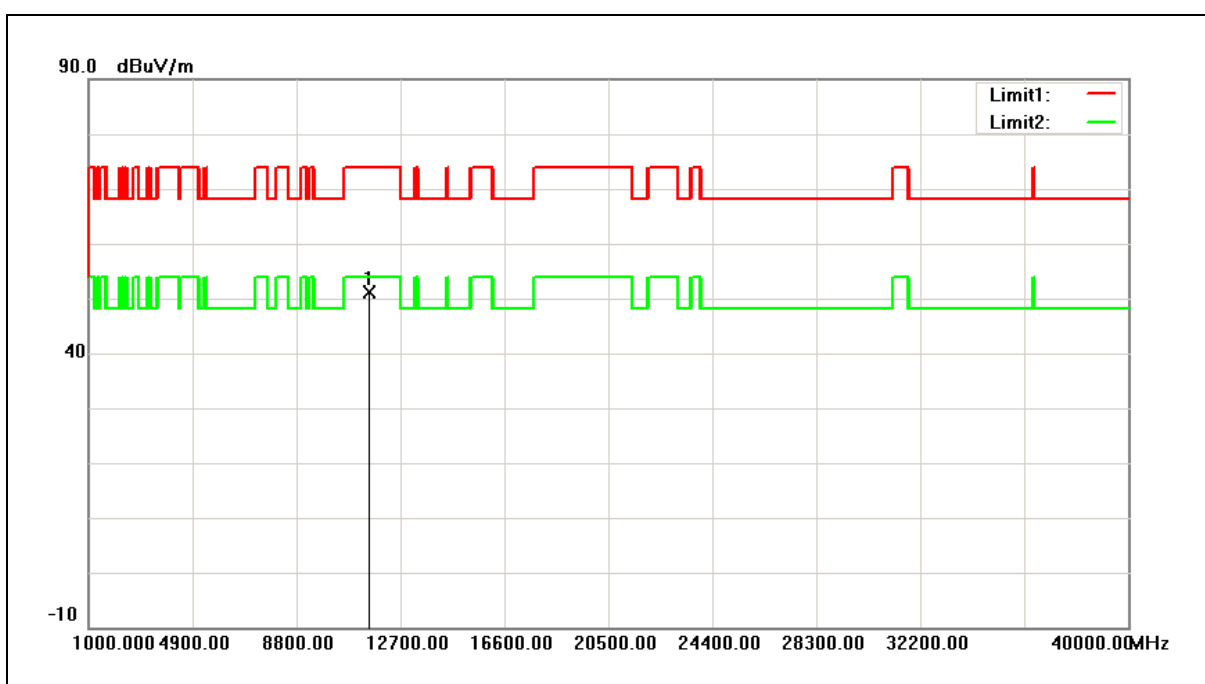

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	44.86	6.29	51.15	74.00	-22.85	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Band Edge

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5180MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/09/2016
Ant.Polar.:	Horizontal		

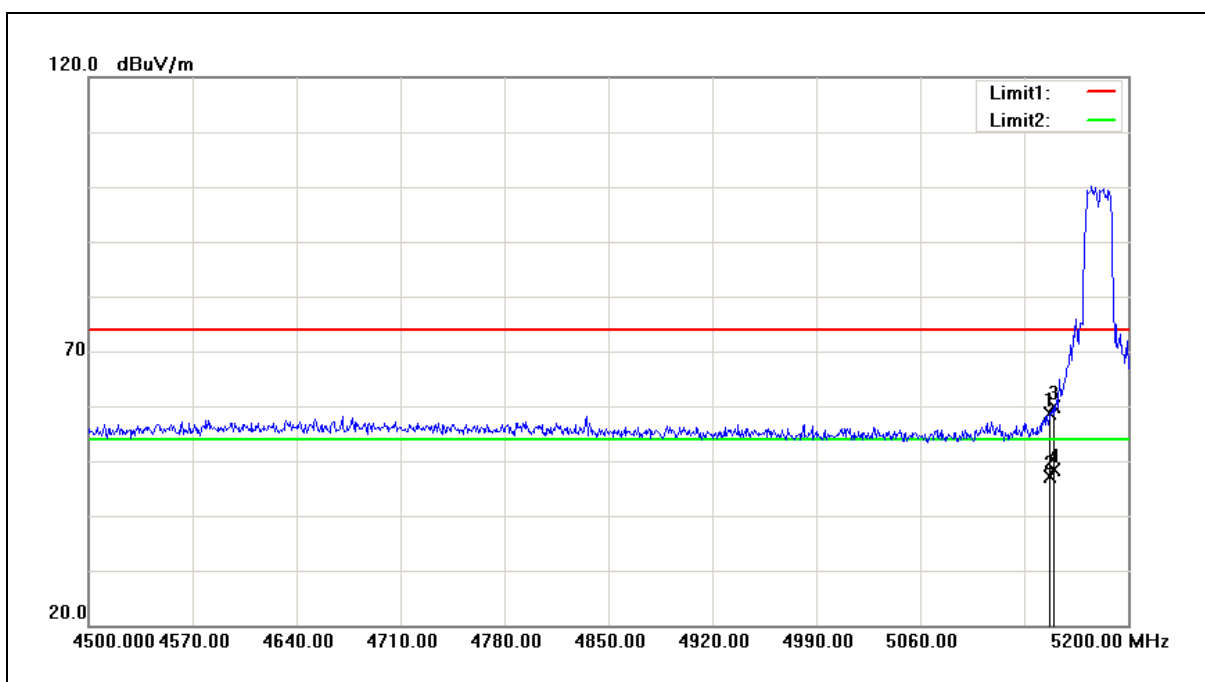


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5147.500	50.49	8.24	58.73	74.00	-15.27	peak
2	5147.500	38.91	8.24	47.15	54.00	-6.85	AVG
3	5150.000	51.54	8.25	59.79	74.00	-14.21	peak
4	5150.000	40.15	8.25	48.40	54.00	-5.60	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5180MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/09/2016
Ant.Polar.:	Vertical		

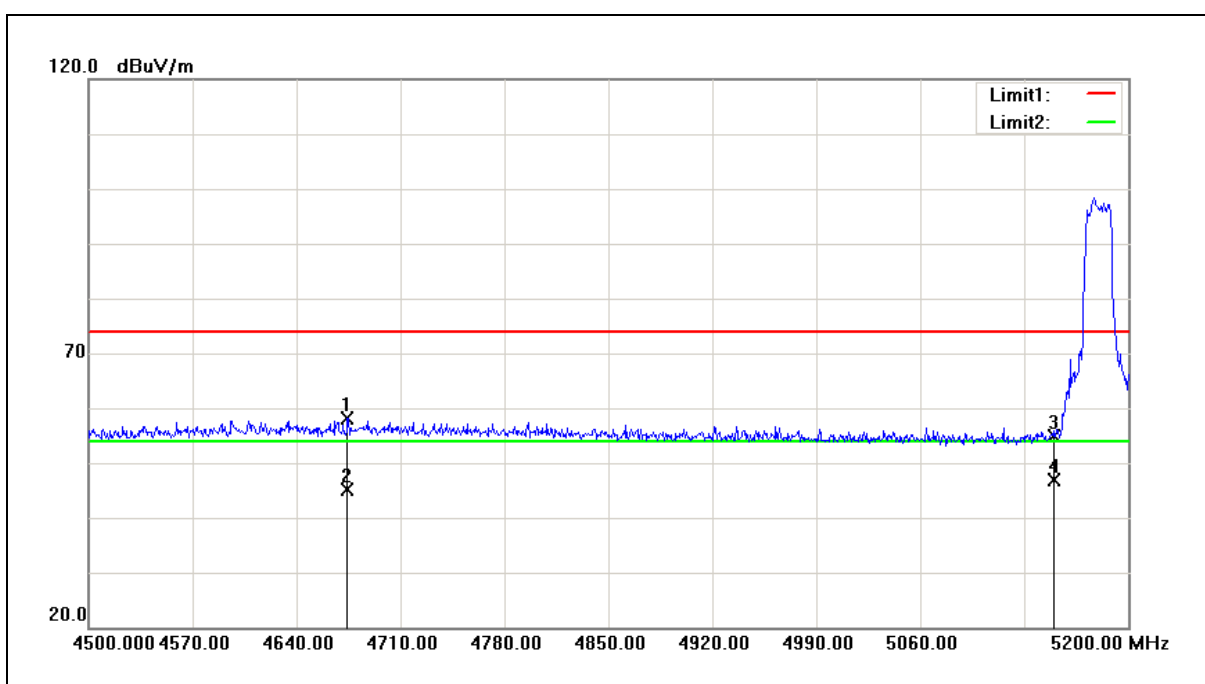


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4674.300	51.19	6.97	58.16	74.00	-15.84	peak
2	4674.300	38.25	6.97	45.22	54.00	-8.78	AVG
3	5150.000	46.73	8.25	54.98	74.00	-19.02	peak
4	5150.000	38.59	8.25	46.84	54.00	-7.16	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5320MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/09/2016
Ant.Polar.:	Horizontal		

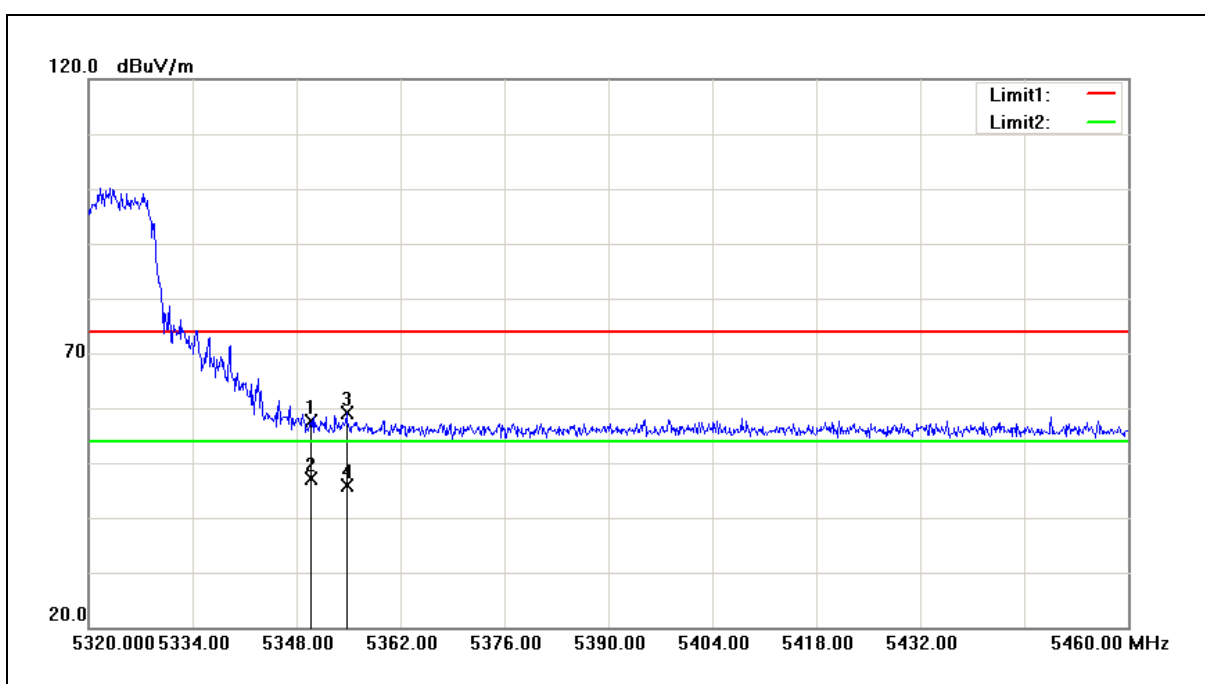


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	49.24	8.41	57.65	74.00	-16.35	peak
2	5350.000	38.71	8.41	47.12	54.00	-6.88	AVG
3	5354.720	50.59	8.42	59.01	74.00	-14.99	peak
4	5354.720	37.52	8.42	45.94	54.00	-8.06	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5320MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/09/2016
Ant.Polar.:	Vertical		

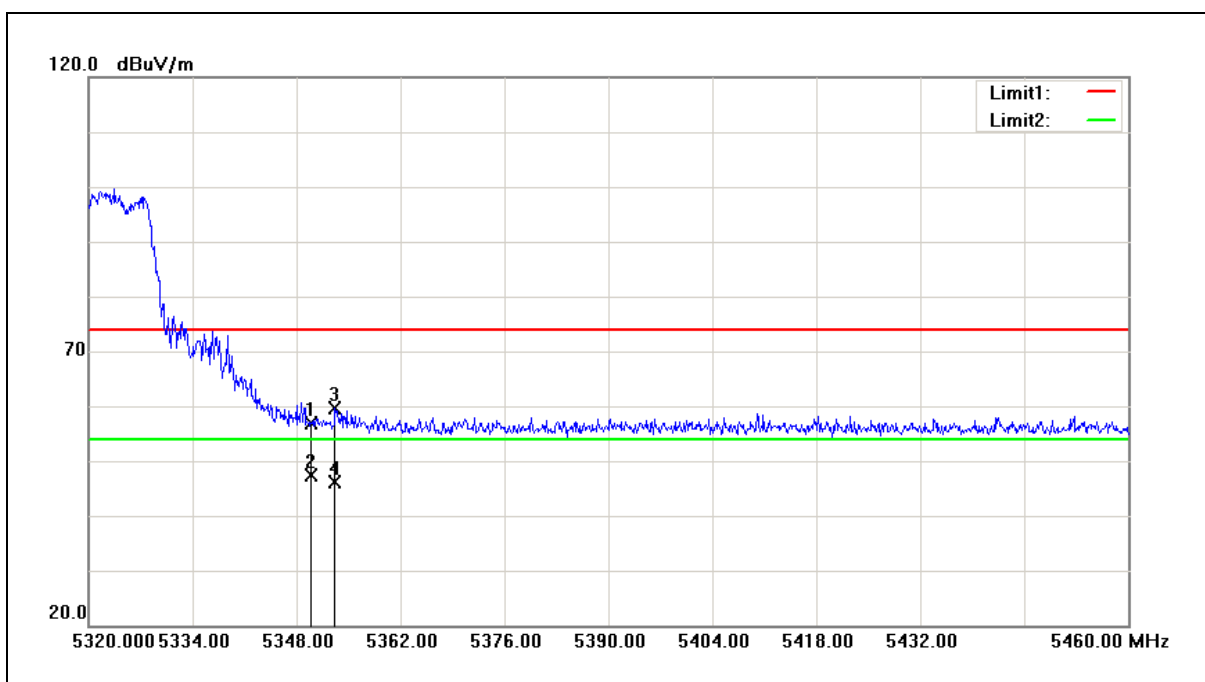


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	48.39	8.41	56.80	74.00	-17.20	peak
2	5350.000	38.89	8.41	47.30	54.00	-6.70	AVG
3	5353.180	51.16	8.42	59.58	74.00	-14.42	peak
4	5353.180	37.83	8.42	46.25	54.00	-7.75	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5500MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/09/2016
Ant.Polar.:	Horizontal		

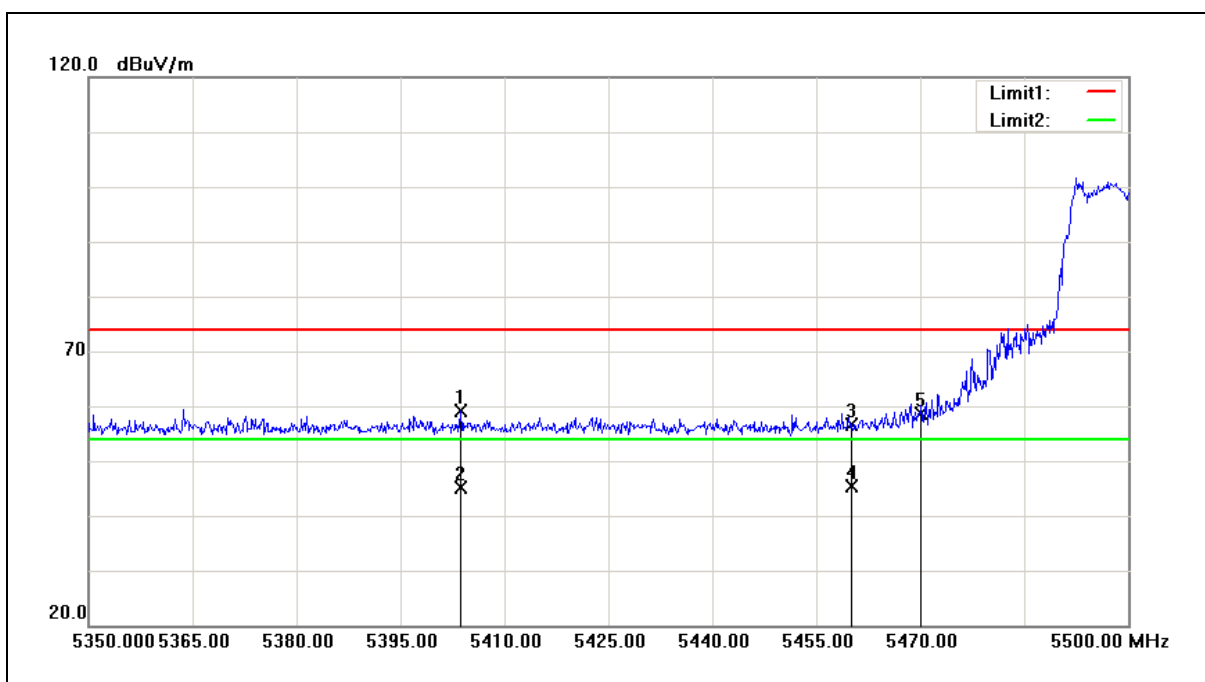


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5403.700	50.59	8.47	59.06	74.00	-14.94	peak
2	5403.700	36.76	8.47	45.23	54.00	-8.77	AVG
3	5460.000	48.16	8.51	56.67	74.00	-17.33	peak
4	5460.000	36.95	8.51	45.46	54.00	-8.54	AVG
5	5470.000	50.02	8.53	58.55	68.20	-9.65	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5500MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/09/2016
Ant.Polar.:	Vertical		

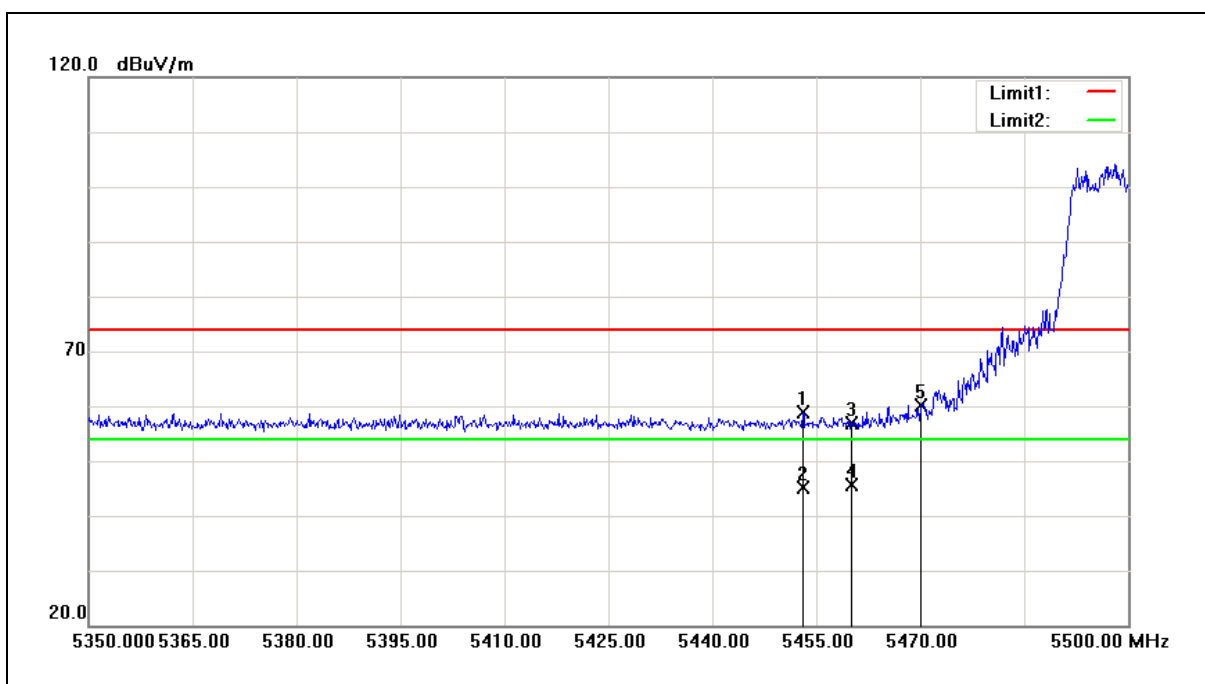


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5453.050	50.28	8.51	58.79	74.00	-15.21	peak
2	5453.050	36.63	8.51	45.14	54.00	-8.86	AVG
3	5460.000	48.33	8.51	56.84	74.00	-17.16	peak
4	5460.000	37.17	8.51	45.68	54.00	-8.32	AVG
5	5470.000	51.49	8.53	60.02	68.20	-8.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5745MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/09/2016
Ant.Polar.:	Horizontal		

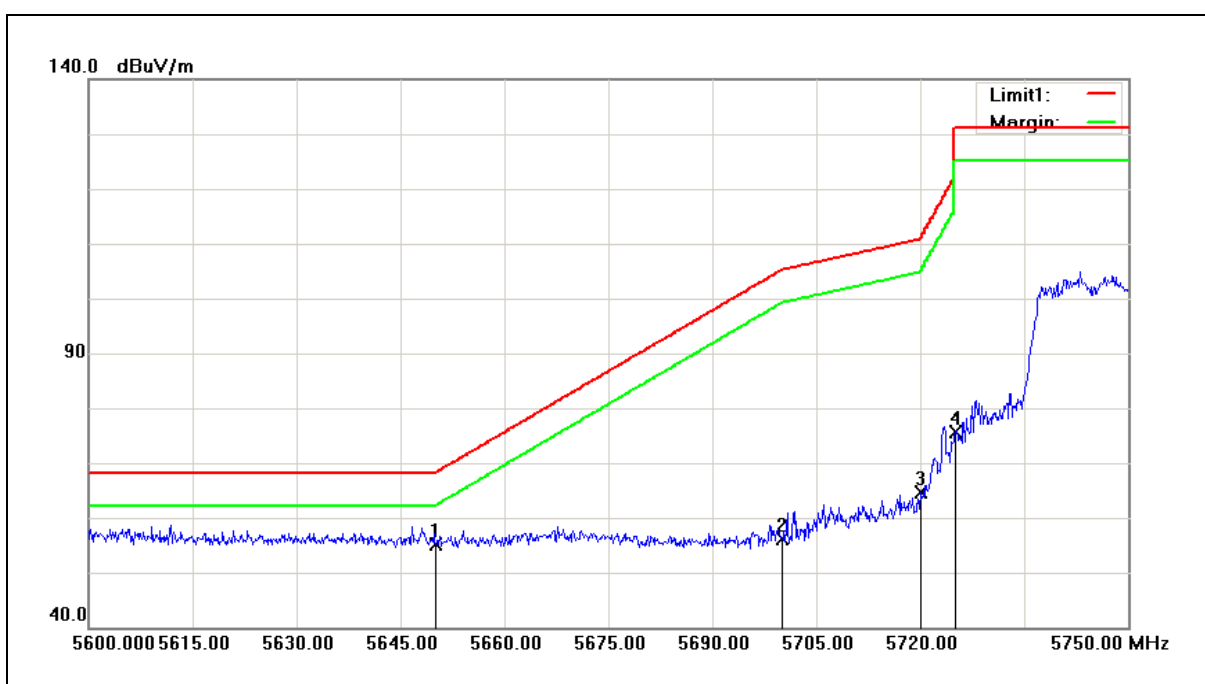


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.18	8.93	55.11	68.20	-13.09	peak
2	5700.000	47.03	9.05	56.08	105.20	-49.12	peak
3	5720.000	55.43	9.09	64.52	110.80	-46.28	peak
4	5725.000	66.43	9.11	75.54	122.20	-46.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5745MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/09/2016
Ant.Polar.:	Vertical		

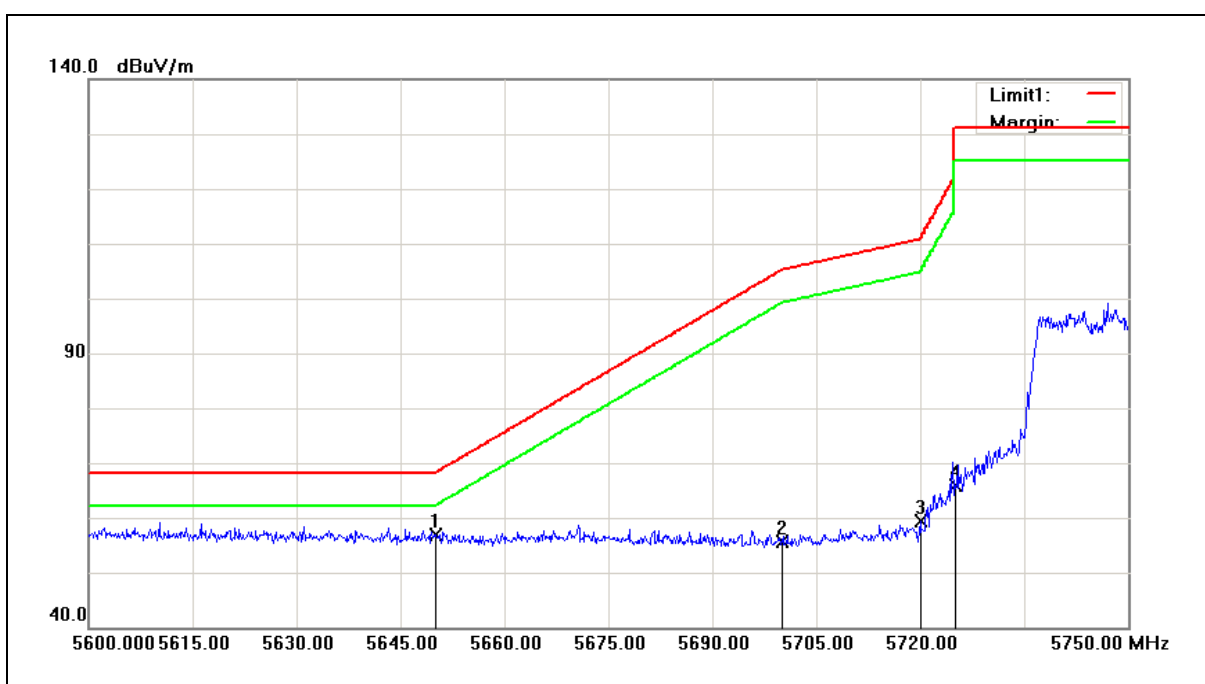


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	48.03	8.93	56.96	68.20	-11.24	peak
2	5700.000	46.47	9.05	55.52	105.20	-49.68	peak
3	5720.000	50.27	9.09	59.36	110.80	-51.44	peak
4	5725.000	56.82	9.11	65.93	122.20	-56.27	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5825MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/09/2016
Ant.Polar.:	Horizontal		

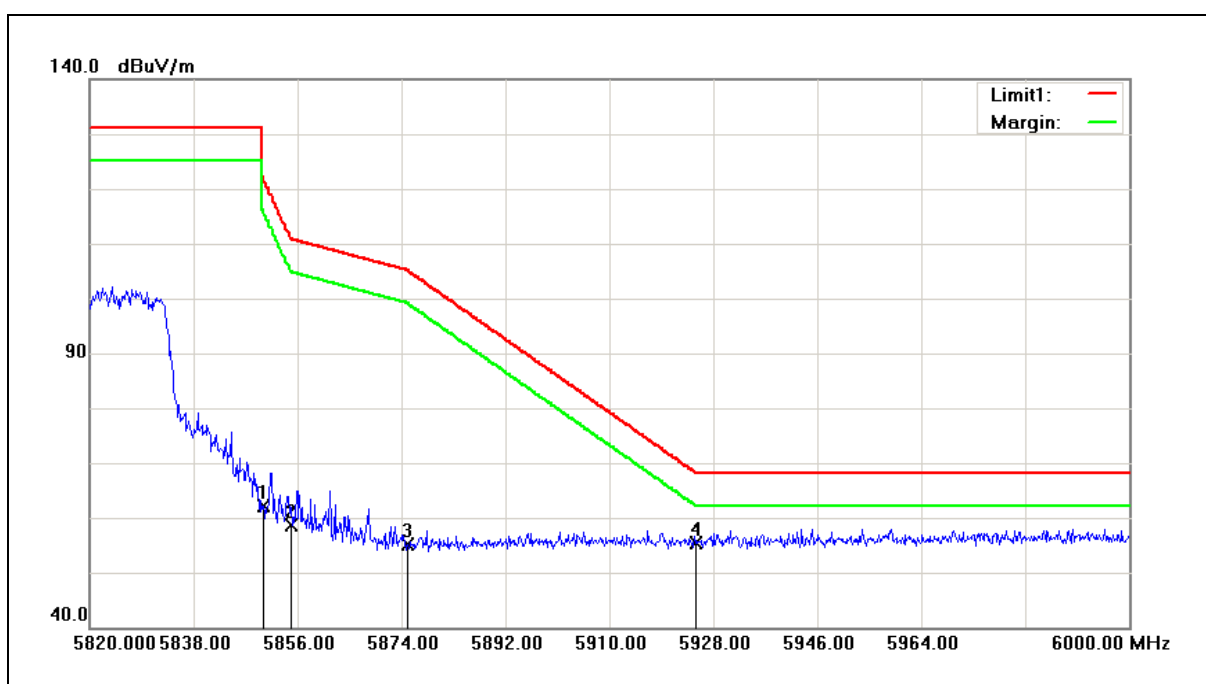


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	52.82	9.41	62.23	122.20	-59.97	peak
2	5855.000	49.12	9.43	58.55	110.80	-52.25	peak
3	5875.000	45.68	9.48	55.16	105.20	-50.04	peak
4	5925.000	45.89	9.61	55.50	68.20	-12.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5825MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	12/09/2016
Ant.Polar.:	Vertical		

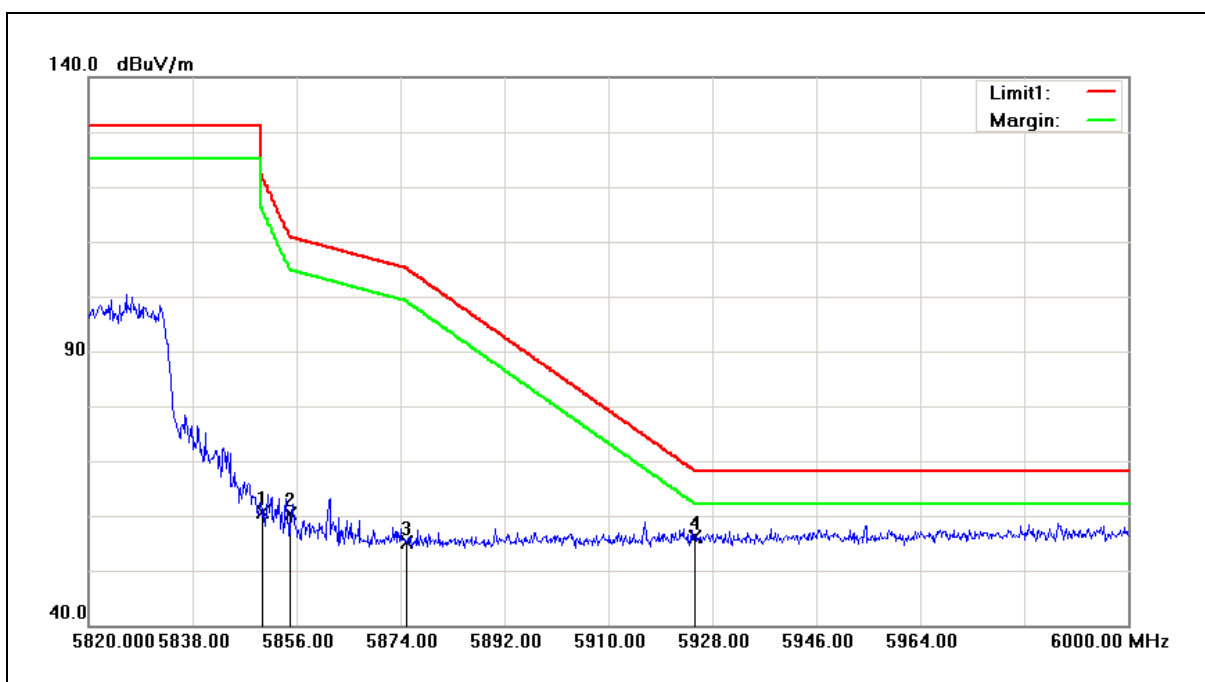


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	51.18	9.41	60.59	122.20	-61.61	peak
2	5855.000	51.06	9.43	60.49	110.80	-50.31	peak
3	5875.000	45.55	9.48	55.03	105.20	-50.17	peak
4	5925.000	46.59	9.61	56.20	68.20	-12.00	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5180MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/09/2016
Ant.Polar.:	Horizontal		

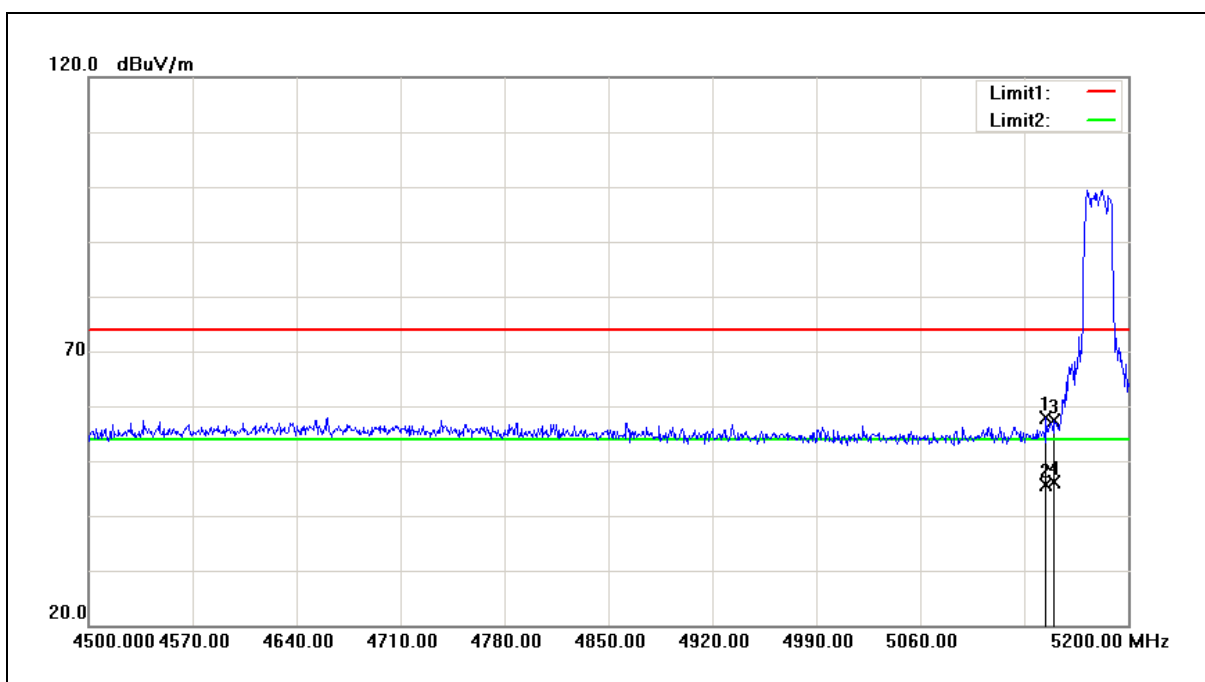


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5144.700	49.75	8.24	57.99	74.00	-16.01	peak
2	5144.700	37.45	8.24	45.69	54.00	-8.31	AVG
3	5150.000	49.18	8.25	57.43	74.00	-16.57	peak
4	5150.000	38.00	8.25	46.25	54.00	-7.75	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5180MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/09/2016
Ant.Polar.:	Vertical		

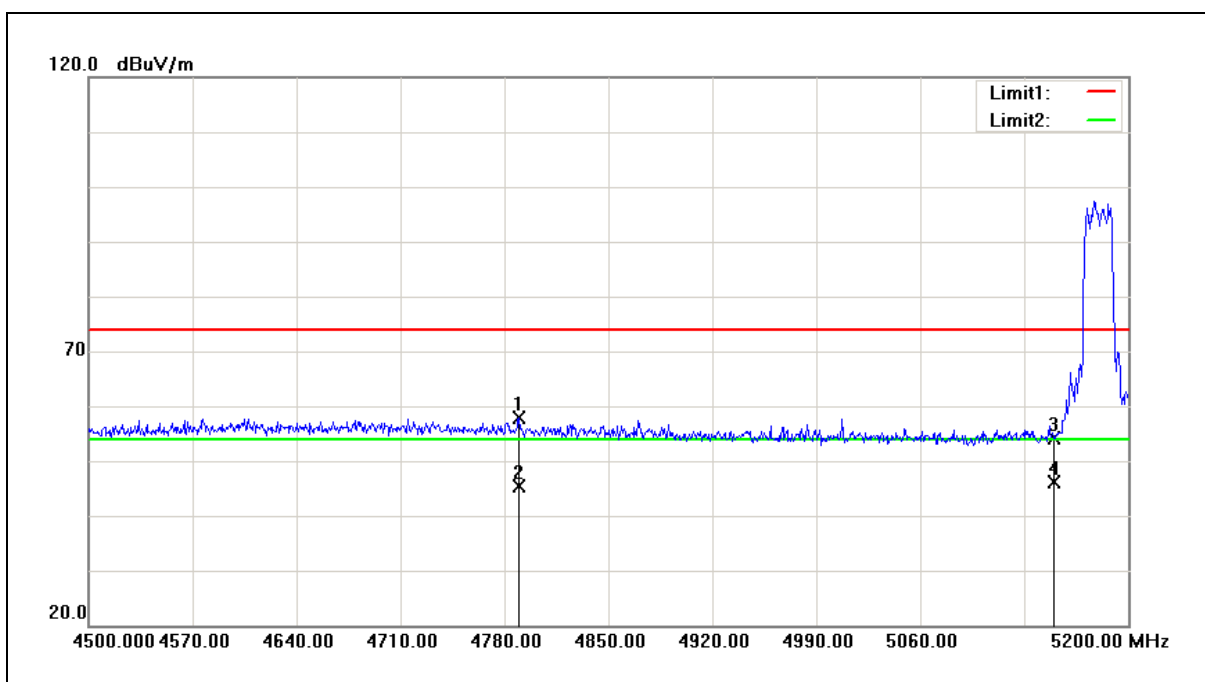


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4789.800	50.57	7.37	57.94	74.00	-16.06	peak
2	4789.800	37.99	7.37	45.36	54.00	-8.64	AVG
3	5150.000	45.96	8.25	54.21	74.00	-19.79	peak
4	5150.000	37.86	8.25	46.11	54.00	-7.89	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5320MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/09/2016
Ant.Polar.:	Horizontal		

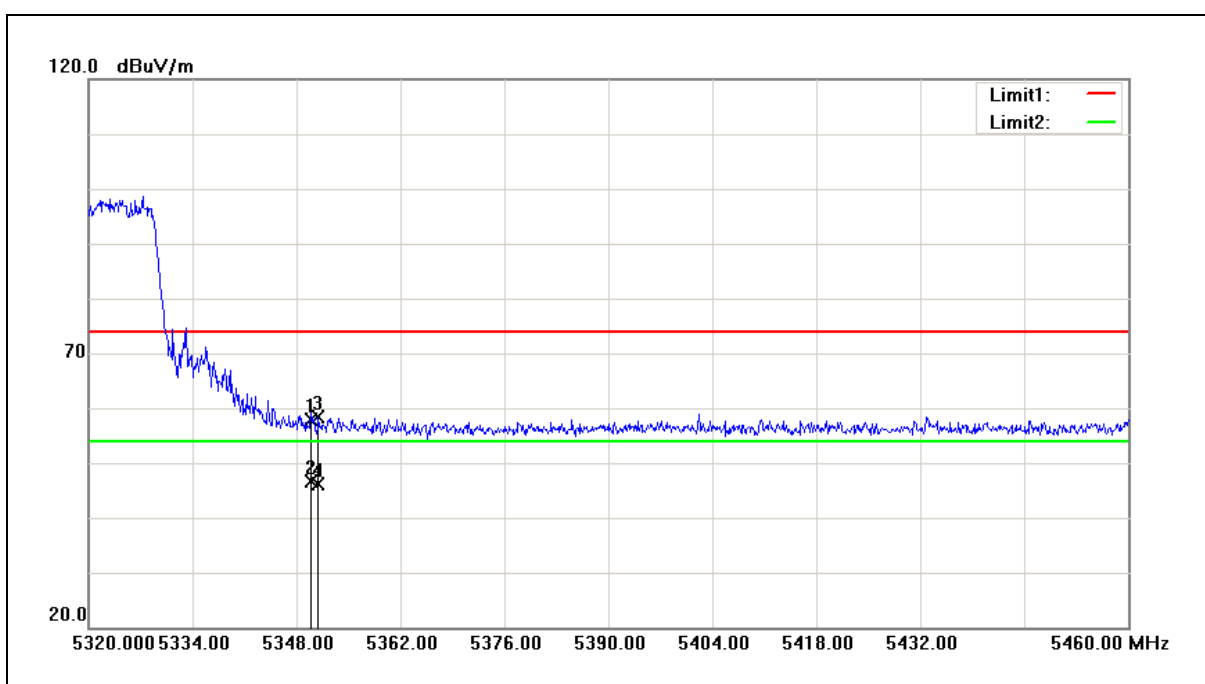


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	49.53	8.41	57.94	74.00	-16.06	peak
2	5350.000	38.30	8.41	46.71	54.00	-7.29	AVG
3	5350.940	50.08	8.41	58.49	74.00	-15.51	peak
4	5350.940	37.83	8.41	46.24	54.00	-7.76	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5320MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/09/2016
Ant.Polar.:	Vertical		

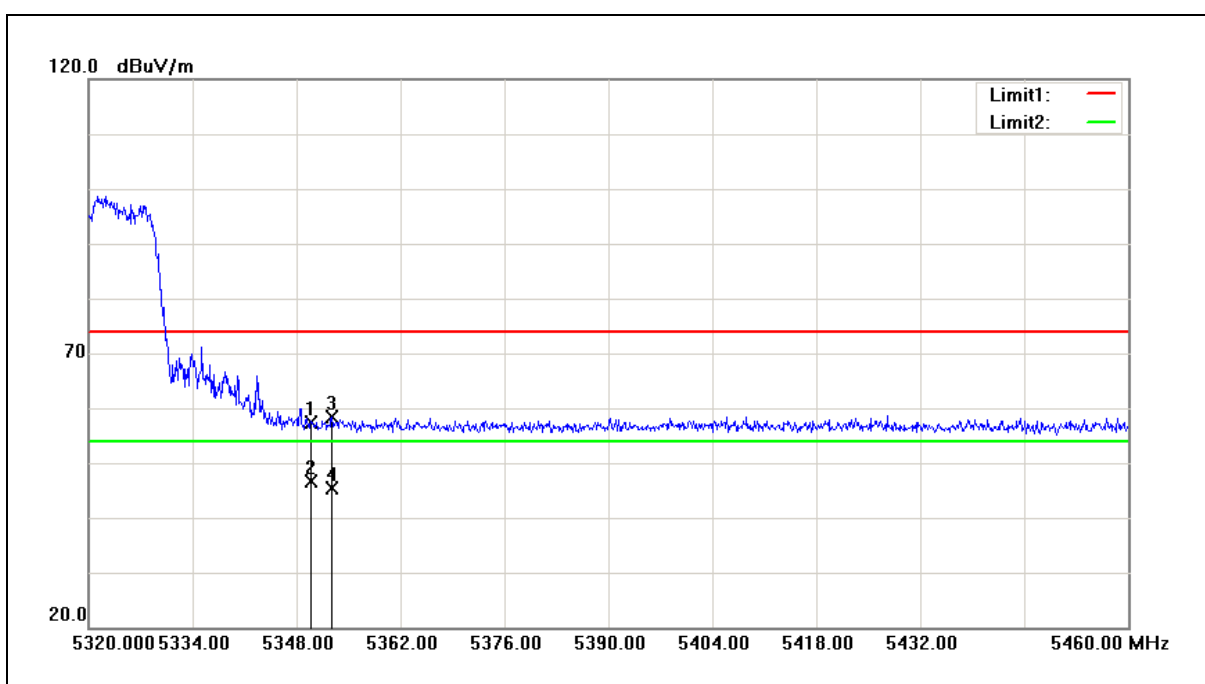


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	49.03	8.41	57.44	74.00	-16.56	peak
2	5350.000	38.13	8.41	46.54	54.00	-7.46	AVG
3	5352.760	49.89	8.42	58.31	74.00	-15.69	peak
4	5352.760	36.91	8.42	45.33	54.00	-8.67	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5500MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/09/2016
Ant.Polar.:	Horizontal		

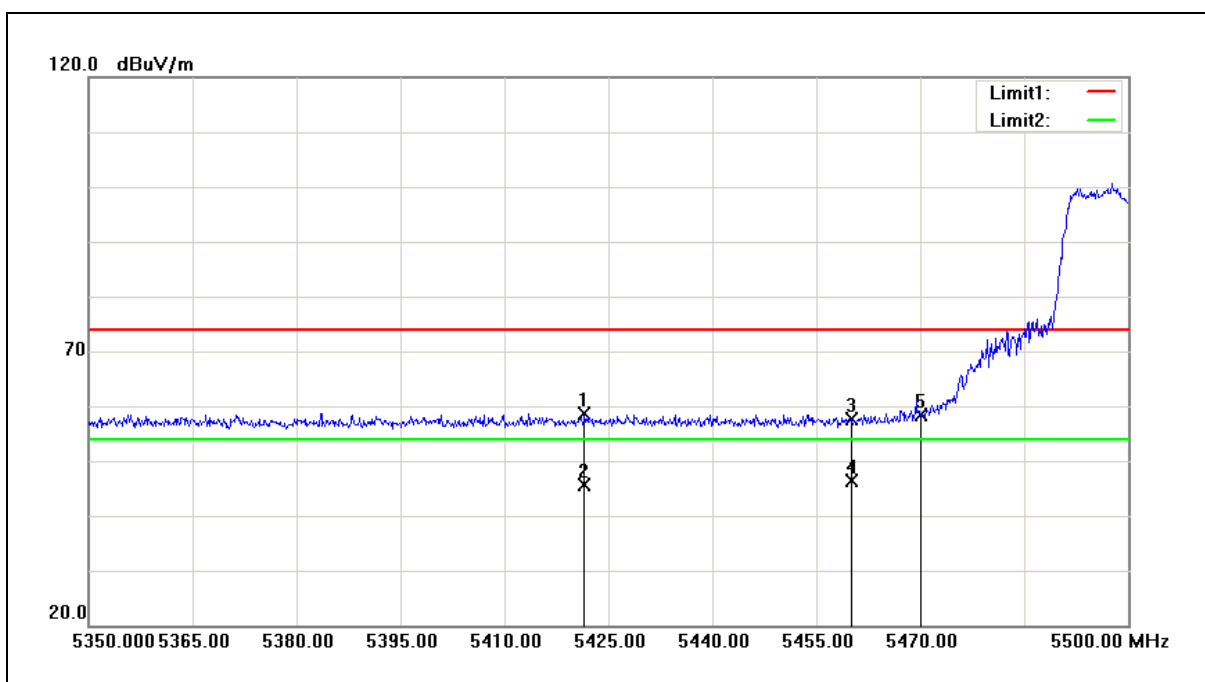


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5421.550	50.26	8.49	58.75	74.00	-15.25	peak
2	5421.550	37.13	8.49	45.62	54.00	-8.38	AVG
3	5460.000	49.15	8.51	57.66	74.00	-16.34	peak
4	5460.000	37.76	8.51	46.27	54.00	-7.73	AVG
5	5470.000	49.94	8.53	58.47	68.20	-9.73	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5500MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/09/2016
Ant.Polar.:	Vertical		

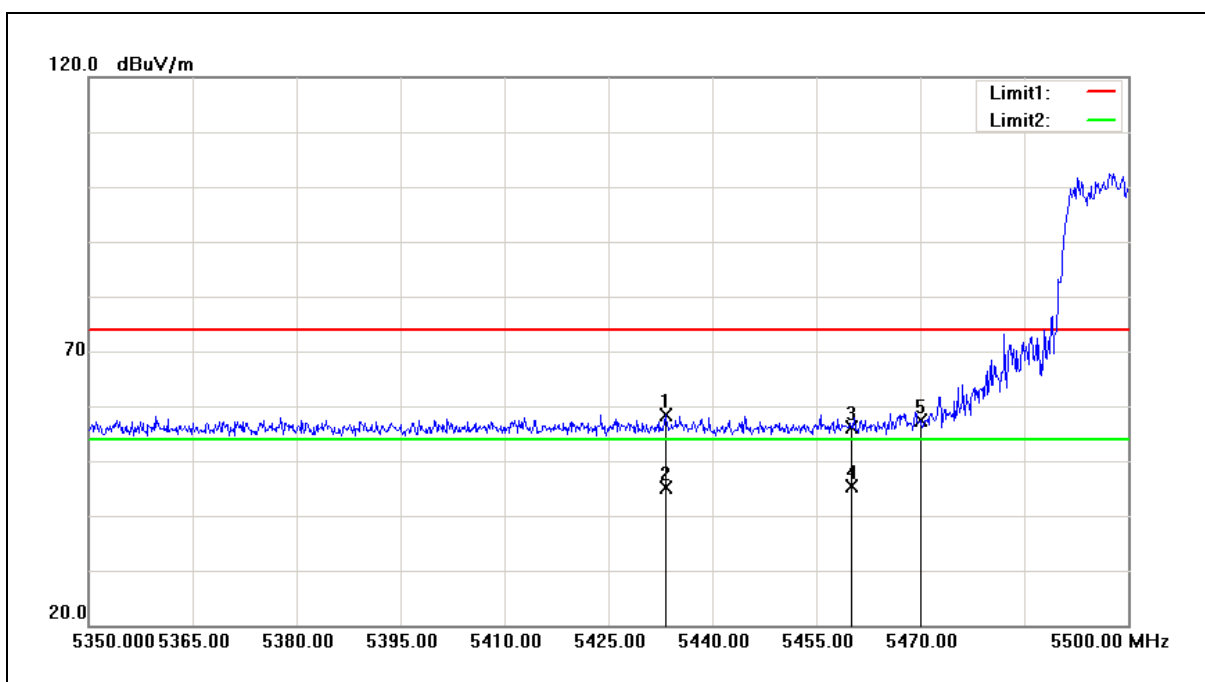


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5433.250	50.01	8.49	58.50	74.00	-15.50	peak
2	5433.250	36.57	8.49	45.06	54.00	-8.94	AVG
3	5460.000	47.60	8.51	56.11	74.00	-17.89	peak
4	5460.000	36.87	8.51	45.38	54.00	-8.62	AVG
5	5470.000	48.95	8.53	57.48	68.20	-10.72	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5745MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/09/2016
Ant.Polar.:	Horizontal		

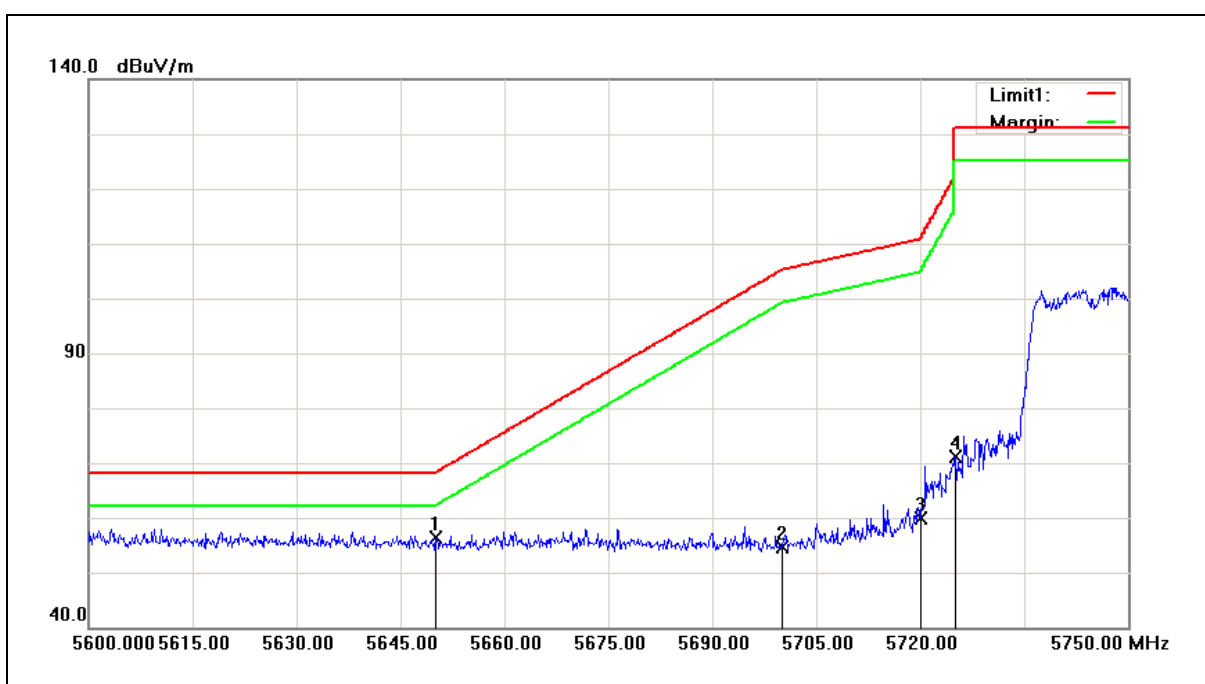


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.41	8.93	56.34	68.20	-11.86	peak
2	5700.000	45.53	9.05	54.58	105.20	-50.62	peak
3	5720.000	50.76	9.09	59.85	110.80	-50.95	peak
4	5725.000	62.06	9.11	71.17	122.20	-51.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5745MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/09/2016
Ant.Polar.:	Vertical		

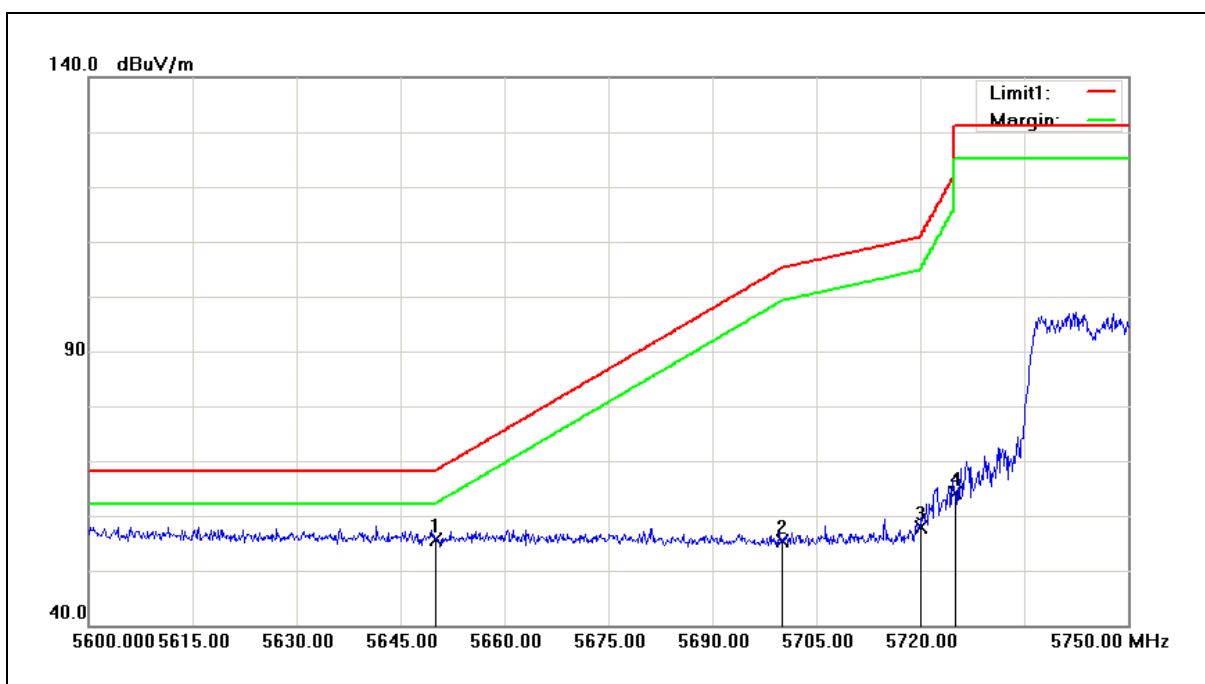


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.73	8.93	55.66	68.20	-12.54	peak
2	5700.000	46.45	9.05	55.50	105.20	-49.70	peak
3	5720.000	48.83	9.09	57.92	110.80	-52.88	peak
4	5725.000	54.96	9.11	64.07	122.20	-58.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5825MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/09/2016
Ant.Polar.:	Horizontal		

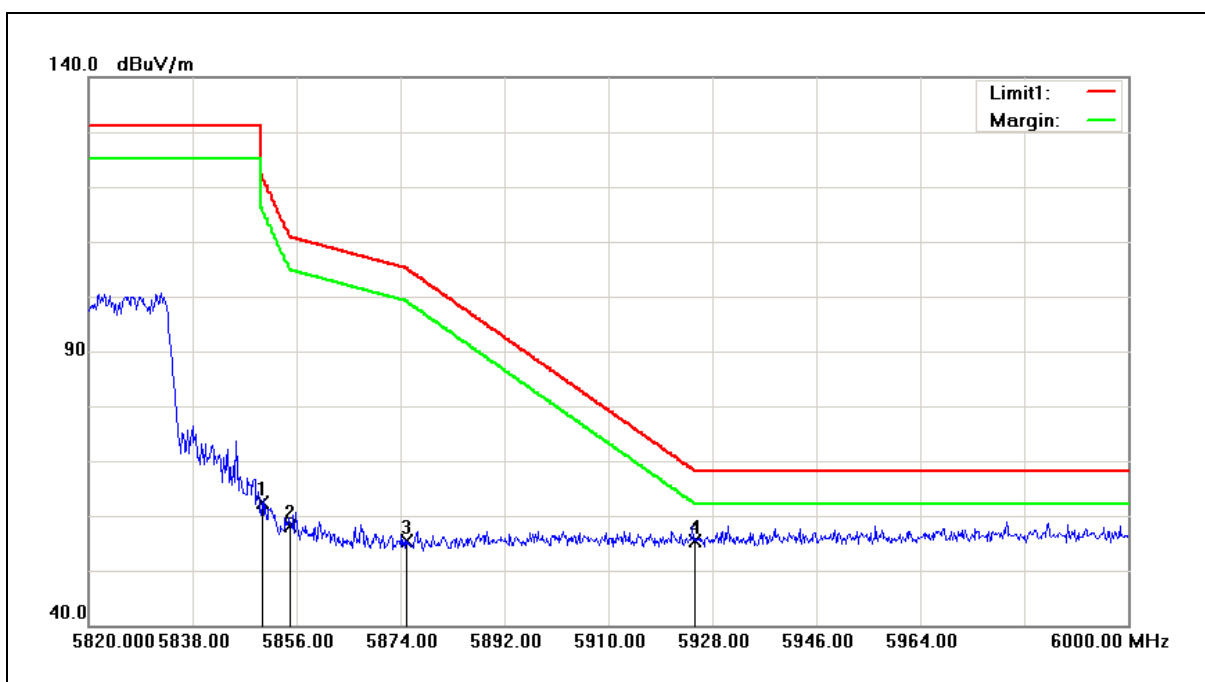


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	53.08	9.41	62.49	122.20	-59.71	peak
2	5855.000	48.76	9.43	58.19	110.80	-52.61	peak
3	5875.000	45.92	9.48	55.40	105.20	-49.80	peak
4	5925.000	45.80	9.61	55.41	68.20	-12.79	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5825MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	12/09/2016
Ant.Polar.:	Vertical		

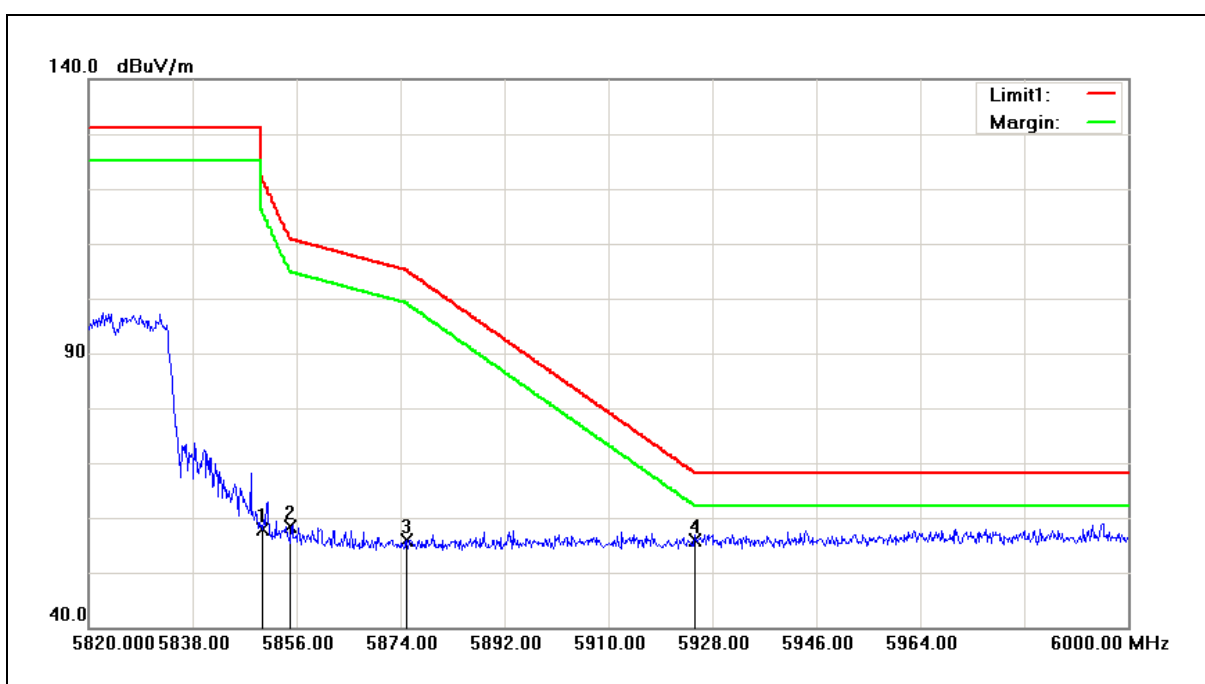


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	48.38	9.41	57.79	122.20	-64.41	peak
2	5855.000	48.92	9.43	58.35	110.80	-52.45	peak
3	5875.000	46.35	9.48	55.83	105.20	-49.37	peak
4	5925.000	46.17	9.61	55.78	68.20	-12.42	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5190MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/09/2016
Ant.Polar.:	Horizontal		

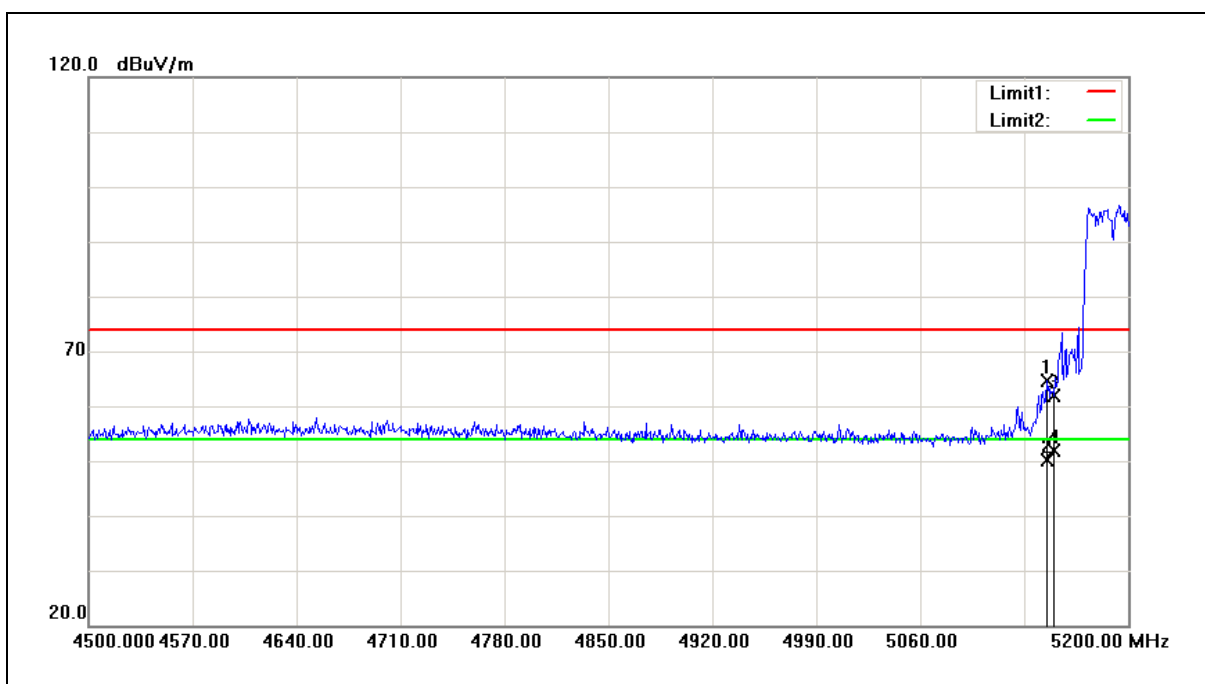


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.400	56.45	8.24	64.69	74.00	-9.31	peak
2	5145.400	41.81	8.24	50.05	54.00	-3.95	AVG
3	5150.000	53.67	8.25	61.92	74.00	-12.08	peak
4	5150.000	43.62	8.25	51.87	54.00	-2.13	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5190MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/09/2016
Ant.Polar.:	Vertical		

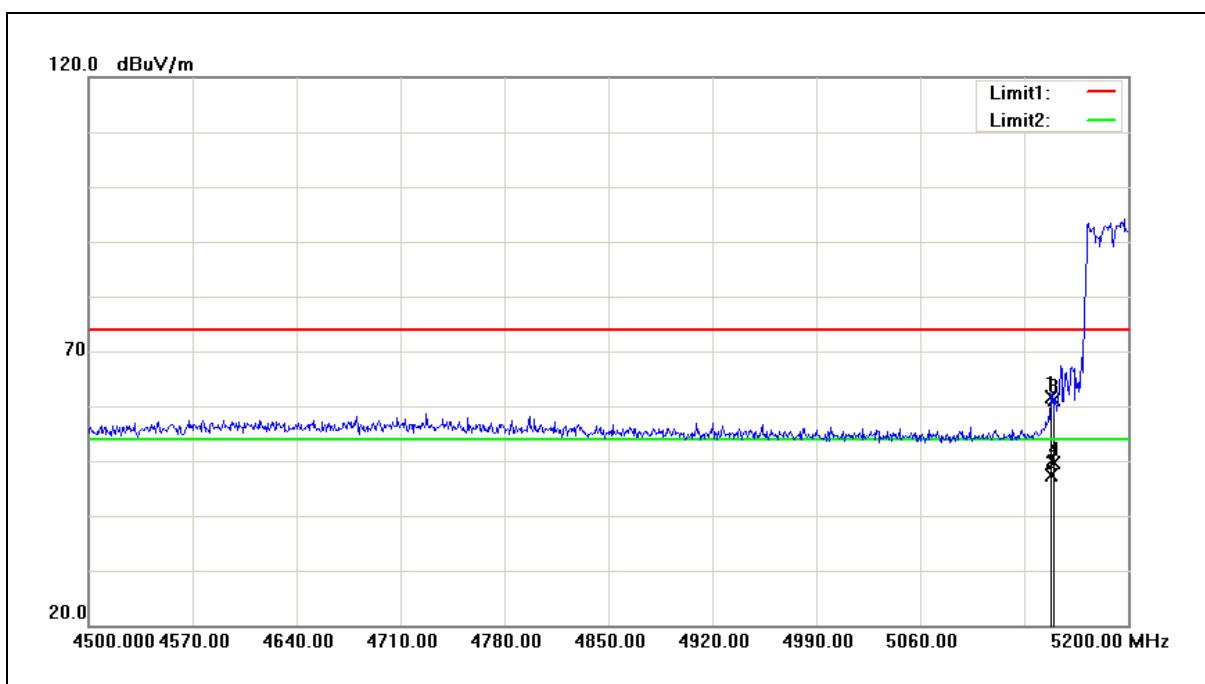

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.200	53.31	8.25	61.56	74.00	-12.44	peak
2	5148.200	39.13	8.25	47.38	54.00	-6.62	AVG
3	5150.000	52.81	8.25	61.06	74.00	-12.94	peak
4	5150.000	41.31	8.25	49.56	54.00	-4.44	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5310MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/09/2016
Ant.Polar.:	Horizontal		

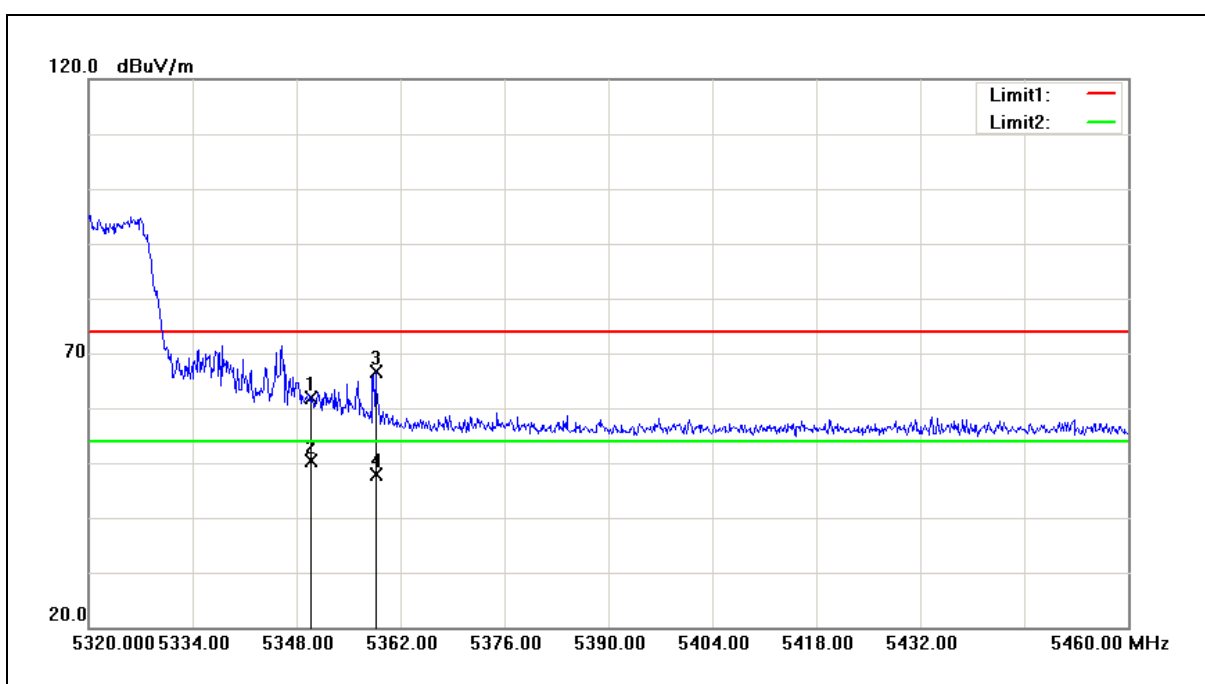


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	53.38	8.41	61.79	74.00	-12.21	peak
2	5350.000	41.85	8.41	50.26	54.00	-3.74	AVG
3	5358.640	58.22	8.42	66.64	74.00	-7.36	peak
4	5358.640	39.51	8.42	47.93	54.00	-6.07	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5310MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/09/2016
Ant.Polar.:	Vertical		

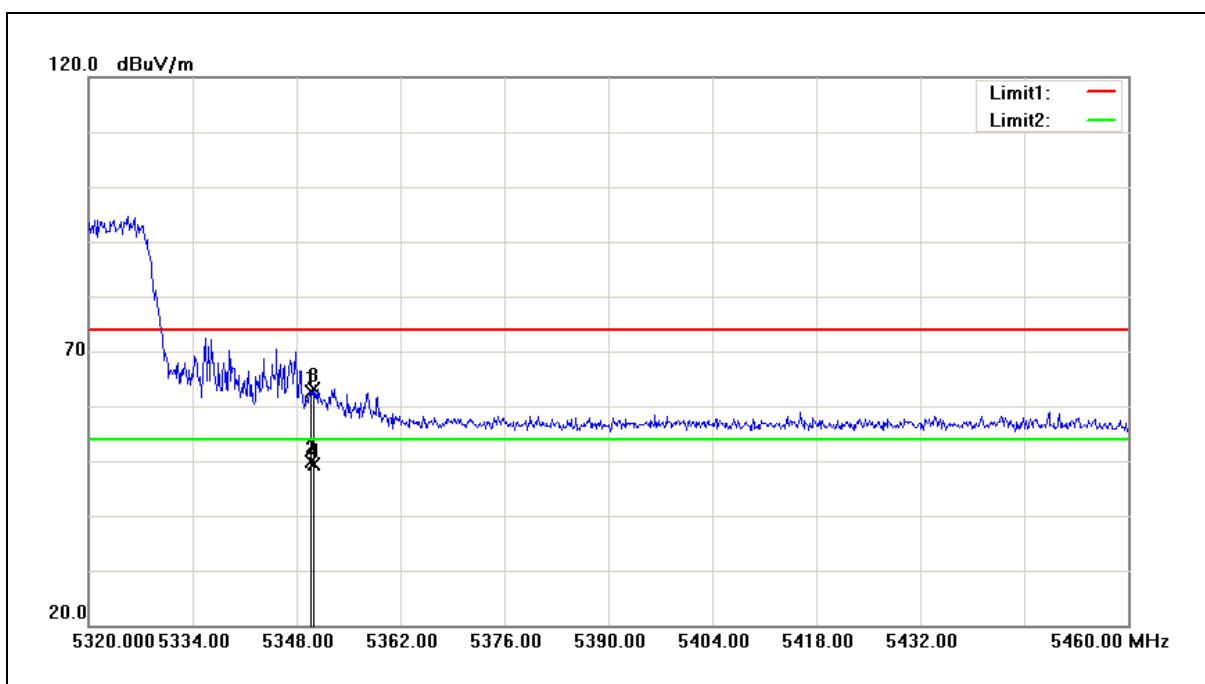


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	54.20	8.41	62.61	74.00	-11.39	peak
2	5350.000	41.54	8.41	49.95	54.00	-4.05	AVG
3	5350.380	54.74	8.41	63.15	74.00	-10.85	peak
4	5350.380	40.89	8.41	49.30	54.00	-4.70	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5510MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/09/2016
Ant.Polar.:	Horizontal		

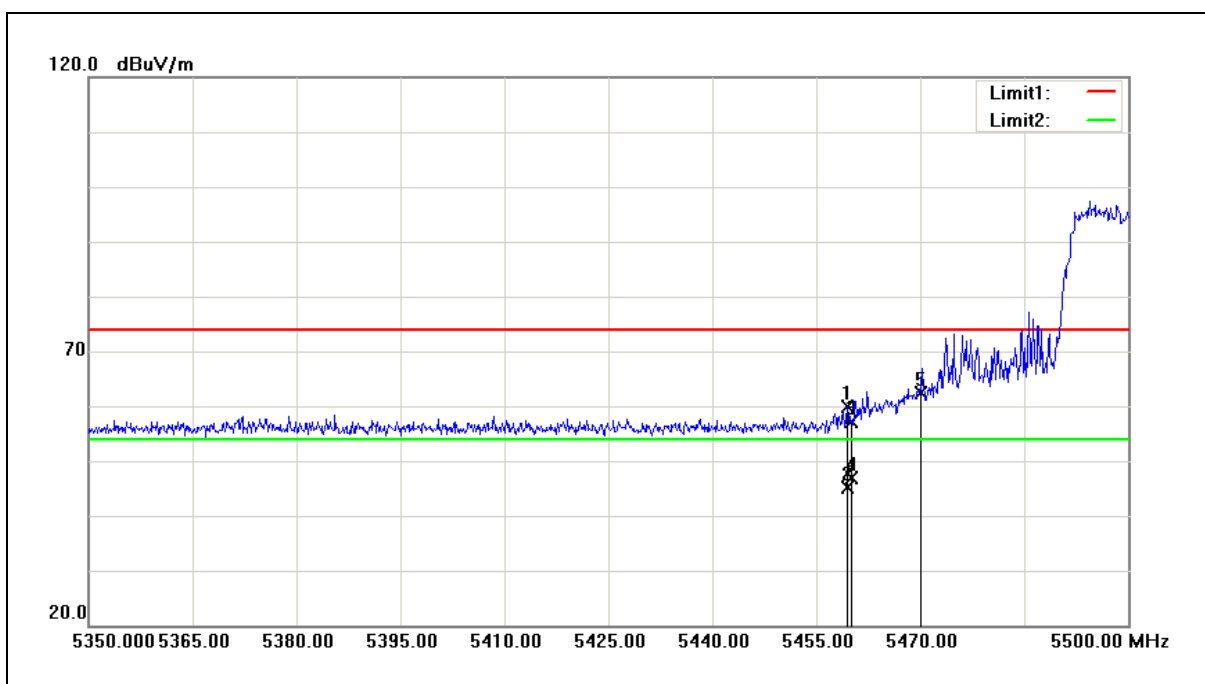


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.500	51.31	8.51	59.82	74.00	-14.18	peak
2	5459.500	36.71	8.51	45.22	54.00	-8.78	AVG
3	5460.000	48.64	8.51	57.15	74.00	-16.85	peak
4	5460.000	38.36	8.51	46.87	54.00	-7.13	AVG
5	5470.000	53.89	8.53	62.42	68.20	-5.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5510MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/09/2016
Ant.Polar.:	Vertical		

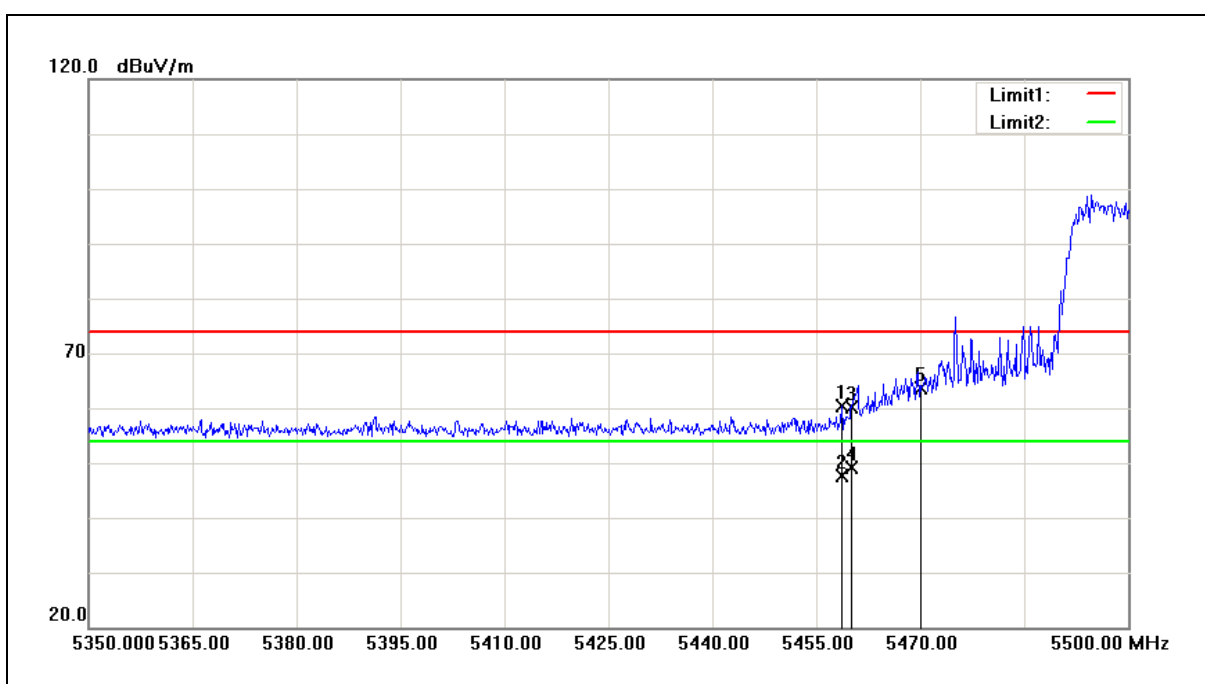


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5458.750	51.84	8.51	60.35	74.00	-13.65	peak
2	5458.750	39.22	8.51	47.73	54.00	-6.27	AVG
3	5460.000	51.71	8.51	60.22	74.00	-13.78	peak
4	5460.000	40.60	8.51	49.11	54.00	-4.89	AVG
5	5470.000	55.14	8.53	63.67	68.20	-4.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5755MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/09/2016
Ant.Polar.:	Horizontal		

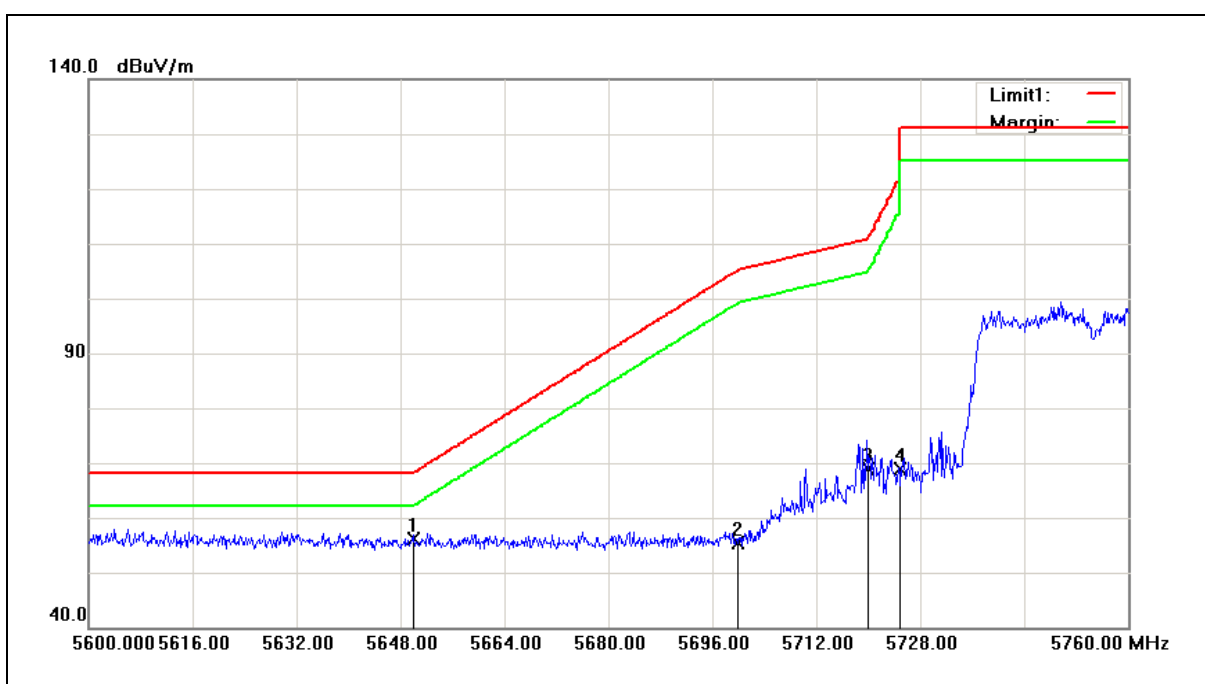


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.20	8.93	56.13	68.20	-12.07	peak
2	5700.000	46.34	9.05	55.39	105.20	-49.81	peak
3	5720.000	59.68	9.09	68.77	110.80	-42.03	peak
4	5725.000	59.83	9.11	68.94	122.20	-53.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5755MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/09/2016
Ant.Polar.:	Vertical		

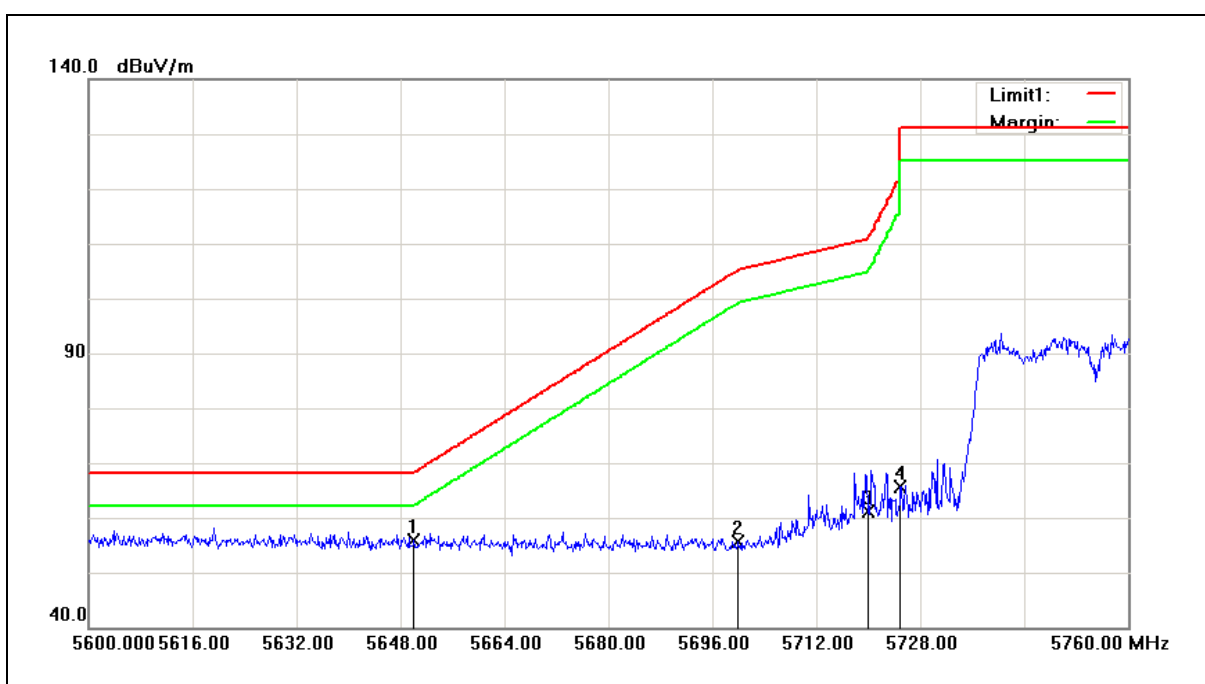


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.97	8.93	55.90	68.20	-12.30	peak
2	5700.000	46.57	9.05	55.62	105.20	-49.58	peak
3	5720.000	52.11	9.09	61.20	110.80	-49.60	peak
4	5725.000	56.60	9.11	65.71	122.20	-56.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5795MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/09/2016
Ant.Polar.:	Horizontal		

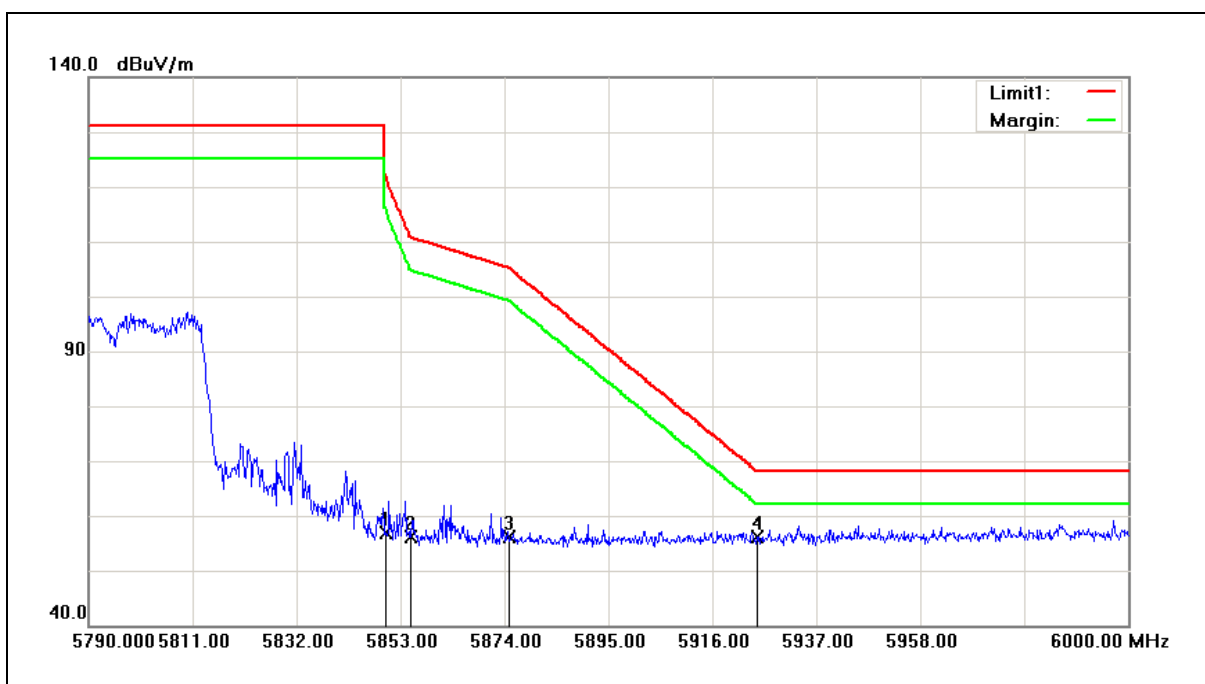


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	47.53	9.41	56.94	122.20	-65.26	peak
2	5855.000	46.67	9.43	56.10	110.80	-54.70	peak
3	5875.000	46.57	9.48	56.05	105.20	-49.15	peak
4	5925.000	46.62	9.61	56.23	68.20	-11.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5795MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	12/09/2016
Ant.Polar.:	Vertical		

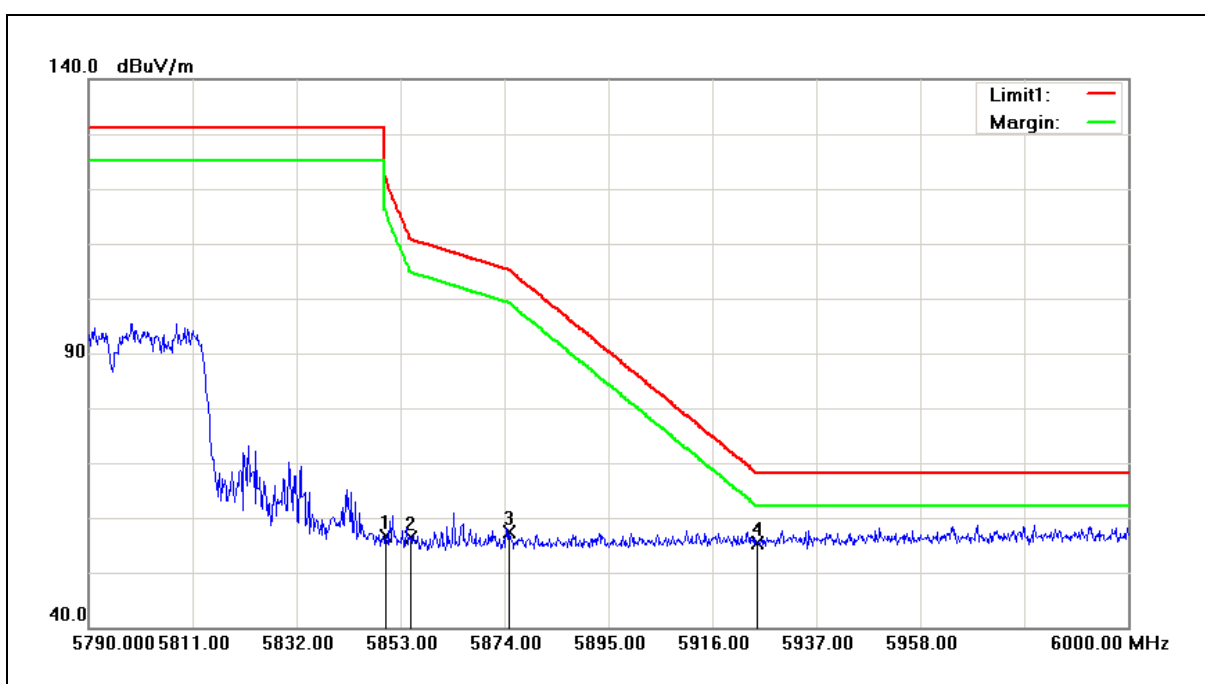


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	47.17	9.41	56.58	122.20	-65.62	peak
2	5855.000	46.95	9.43	56.38	110.80	-54.42	peak
3	5875.000	47.82	9.48	57.30	105.20	-47.90	peak
4	5925.000	45.70	9.61	55.31	68.20	-12.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5210MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	12/09/2016
Ant.Polar.:	Horizontal		

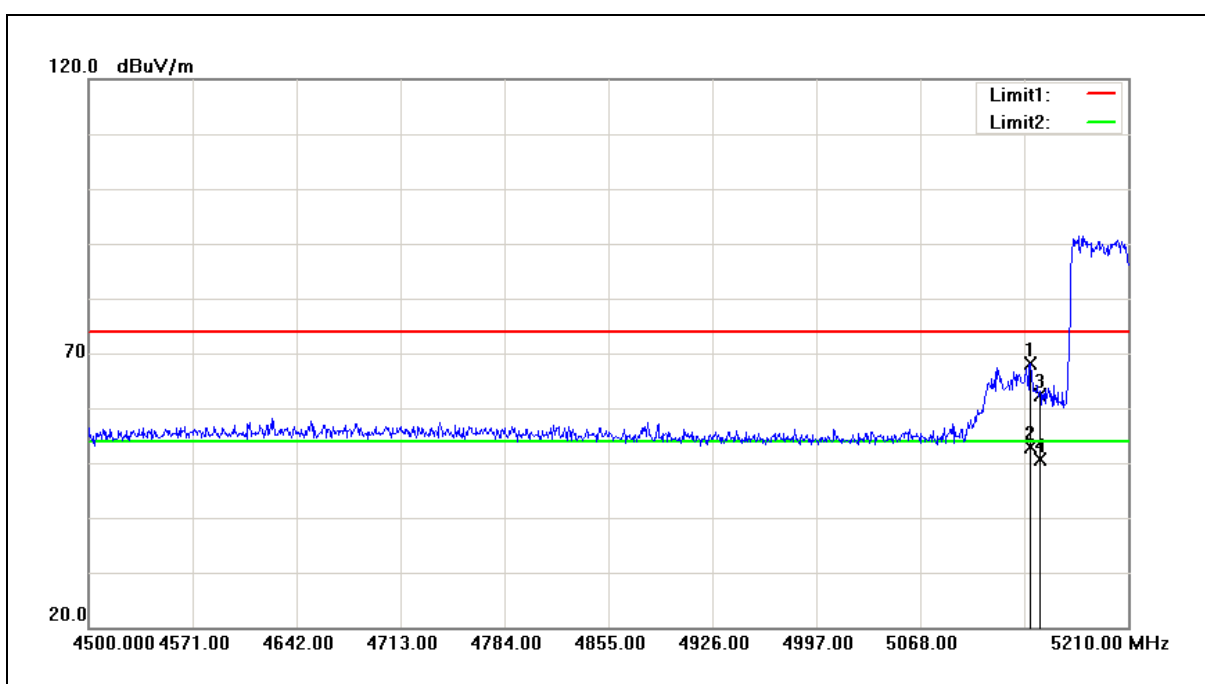


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5143.260	59.84	8.24	68.08	74.00	-5.92	peak
2	5143.260	44.62	8.24	52.86	54.00	-1.14	AVG
3	5150.000	54.02	8.25	62.27	74.00	-11.73	peak
4	5150.000	42.36	8.25	50.61	54.00	-3.39	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5210MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	12/09/2016
Ant.Polar.:	Vertical		

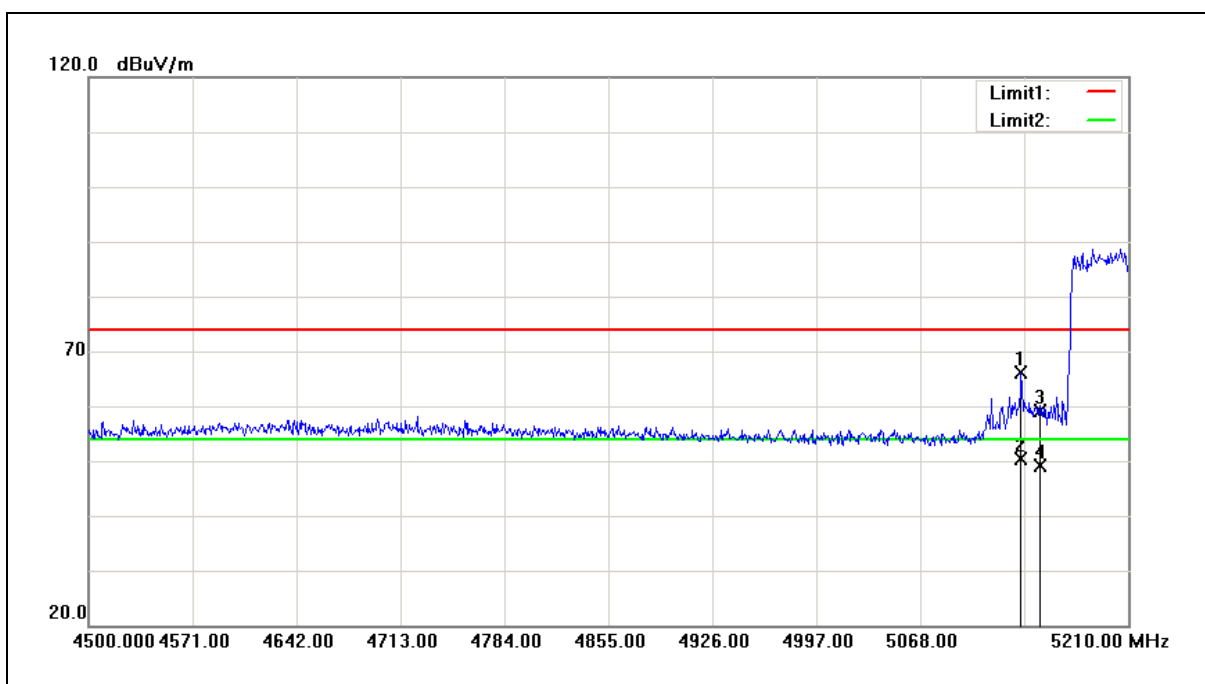


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5136.870	57.89	8.23	66.12	74.00	-7.88	peak
2	5136.870	42.16	8.23	50.39	54.00	-3.61	AVG
3	5150.000	50.84	8.25	59.09	74.00	-14.91	peak
4	5150.000	40.88	8.25	49.13	54.00	-4.87	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5290MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	12/09/2016
Ant.Polar.:	Horizontal		

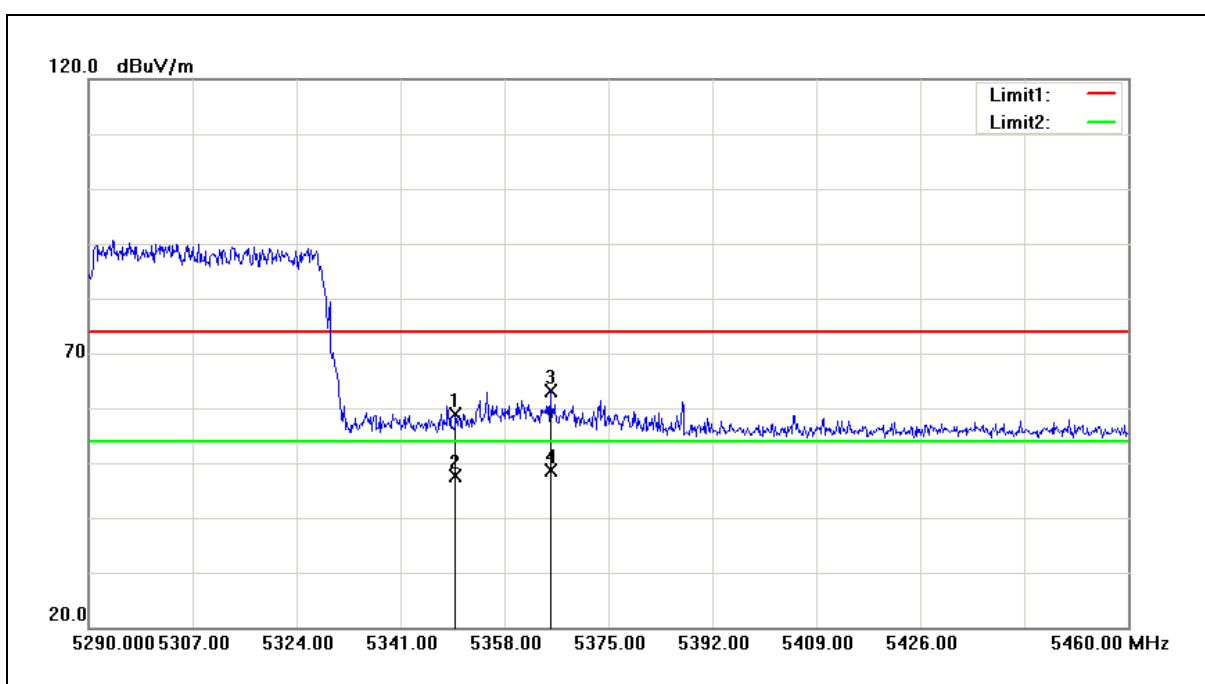


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	50.48	8.41	58.89	74.00	-15.11	peak
2	5350.000	39.14	8.41	47.55	54.00	-6.45	AVG
3	5365.480	54.64	8.43	63.07	74.00	-10.93	peak
4	5365.480	40.20	8.43	48.63	54.00	-5.37	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5290MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	12/09/2016
Ant.Polar.:	Vertical		

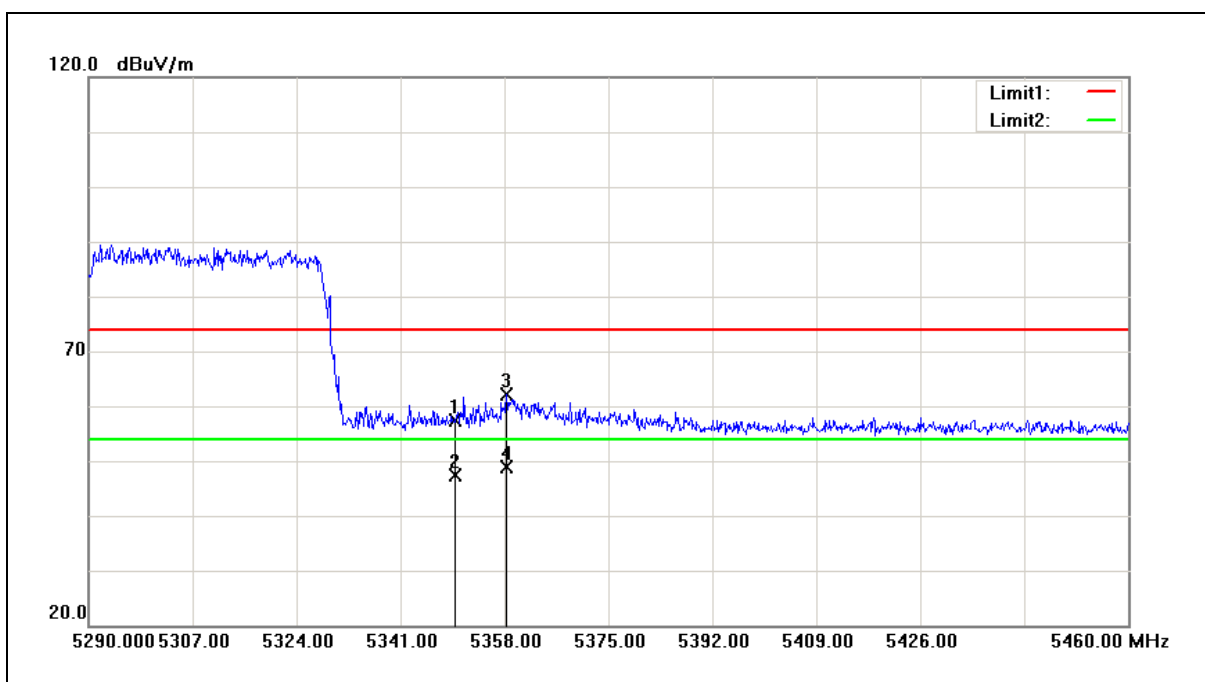


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	48.92	8.41	57.33	74.00	-16.67	peak
2	5350.000	39.07	8.41	47.48	54.00	-6.52	AVG
3	5358.340	53.74	8.42	62.16	74.00	-11.84	peak
4	5358.340	40.35	8.42	48.77	54.00	-5.23	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5530MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	12/09/2016
Ant.Polar.:	Horizontal		

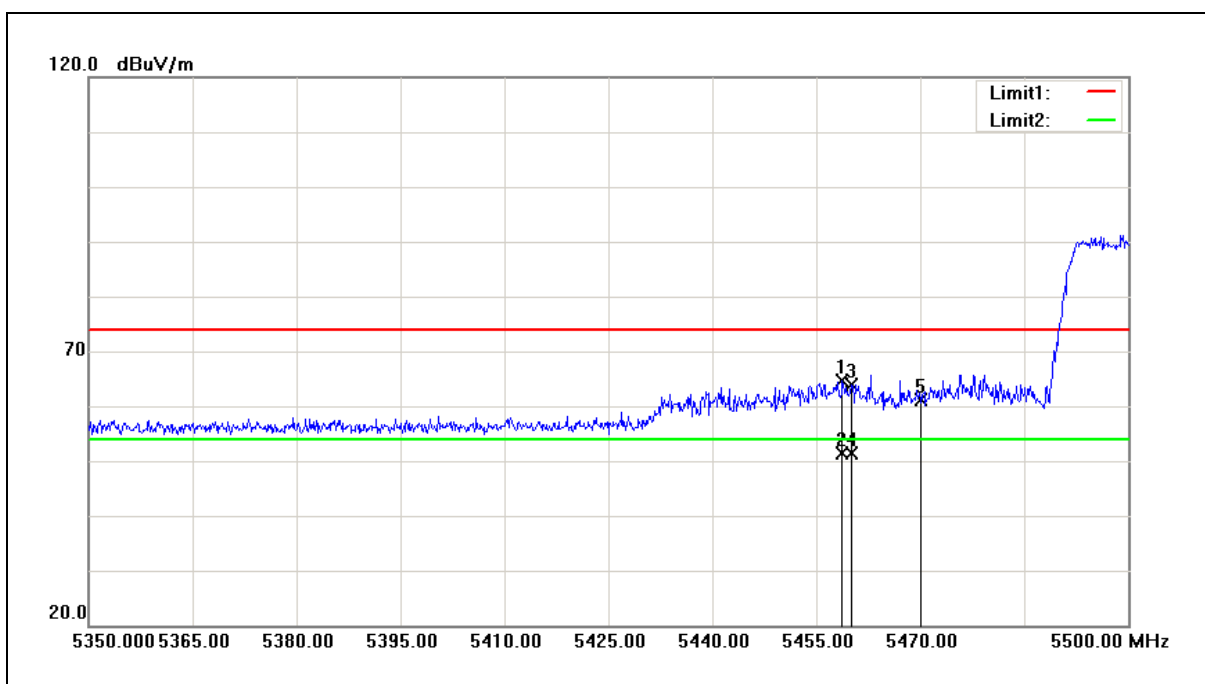


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5458.750	56.05	8.51	64.56	74.00	-9.44	peak
2	5458.750	42.80	8.51	51.31	54.00	-2.69	AVG
3	5460.000	55.35	8.51	63.86	74.00	-10.14	peak
4	5460.000	42.78	8.51	51.29	54.00	-2.71	AVG
5	5470.000	52.65	8.53	61.18	68.20	-7.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5530MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	12/09/2016
Ant.Polar.:	Vertical		

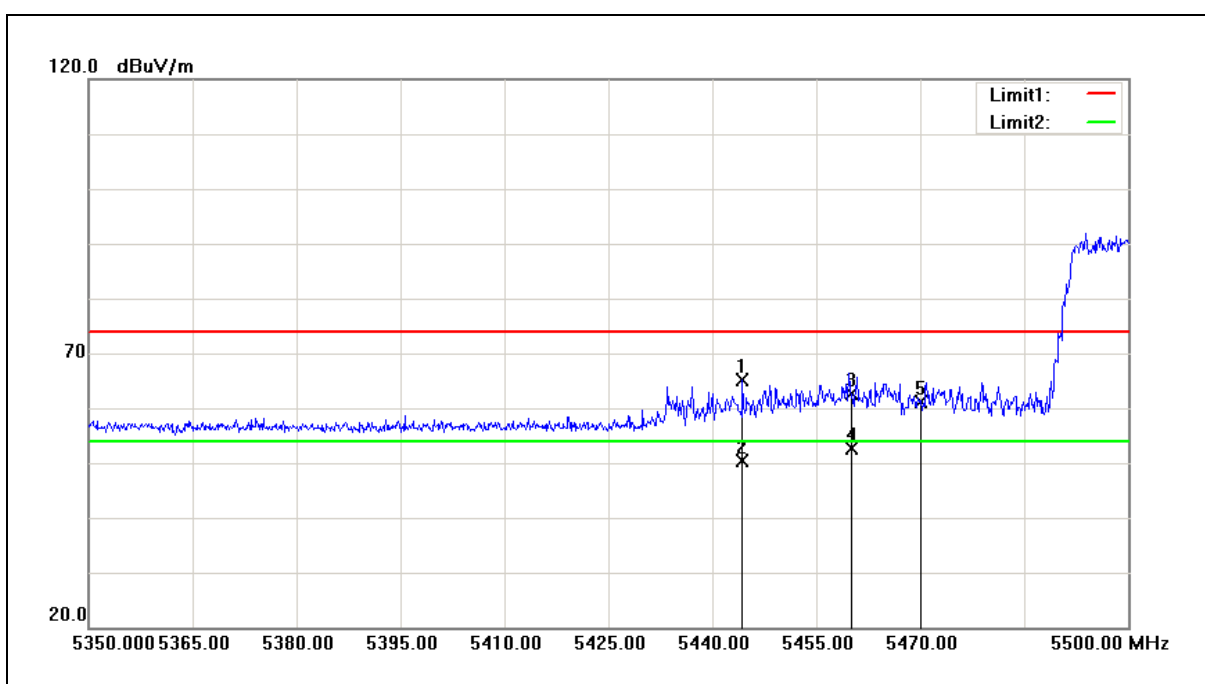

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5444.350	56.65	8.51	65.16	74.00	-8.84	peak
2	5444.350	41.82	8.51	50.33	54.00	-3.67	AVG
3	5460.000	54.23	8.51	62.74	74.00	-11.26	peak
4	5460.000	44.10	8.51	52.61	54.00	-1.39	AVG
5	5470.000	52.50	8.53	61.03	68.20	-7.17	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5775MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	12/09/2016
Ant.Polar.:	Horizontal		

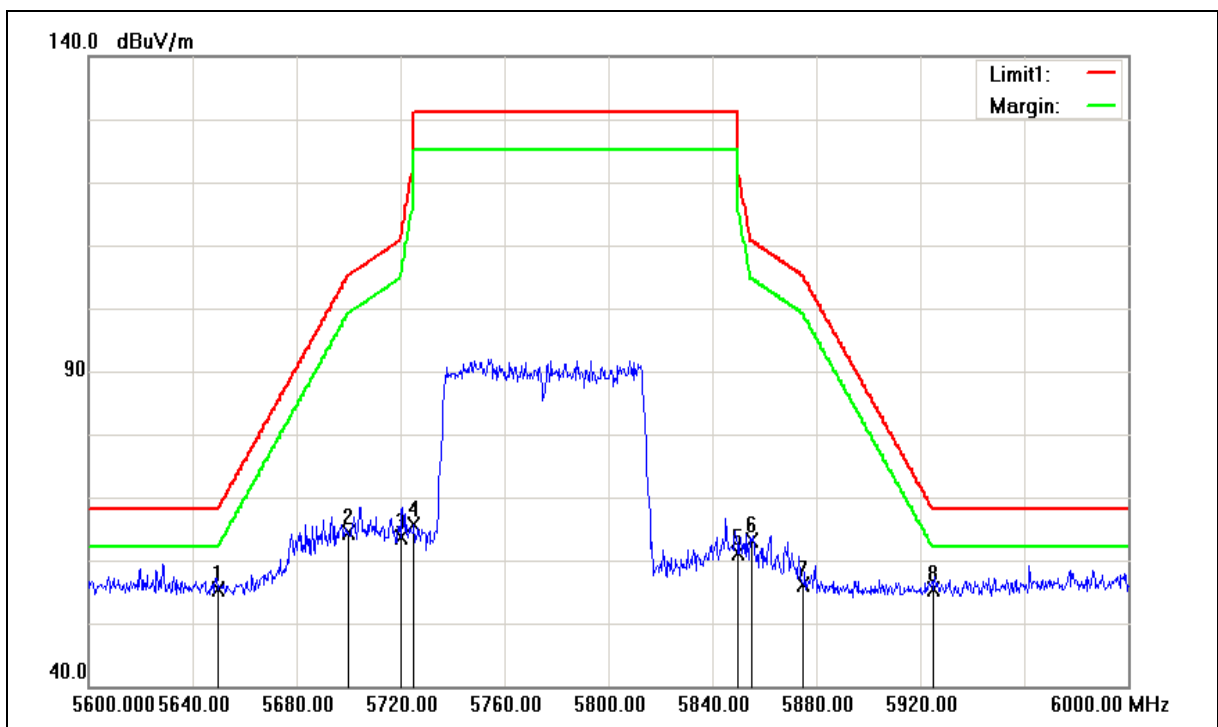



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5775MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	12/09/2016
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.40	8.93	55.33	68.20	-12.87	peak
2	5700.000	55.37	9.05	64.42	105.20	-40.78	peak
3	5720.000	54.49	9.09	63.58	110.80	-47.22	peak
4	5725.000	56.46	9.11	65.57	122.20	-56.63	peak
5	5850.000	51.61	9.41	61.02	122.20	-61.18	peak
6	5855.000	53.75	9.43	63.18	110.80	-47.62	peak
7	5875.000	46.76	9.48	56.24	105.20	-48.96	peak
8	5925.000	45.81	9.61	55.42	68.20	-12.78	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5775MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	12/09/2016
Ant.Polar.:	Vertical		

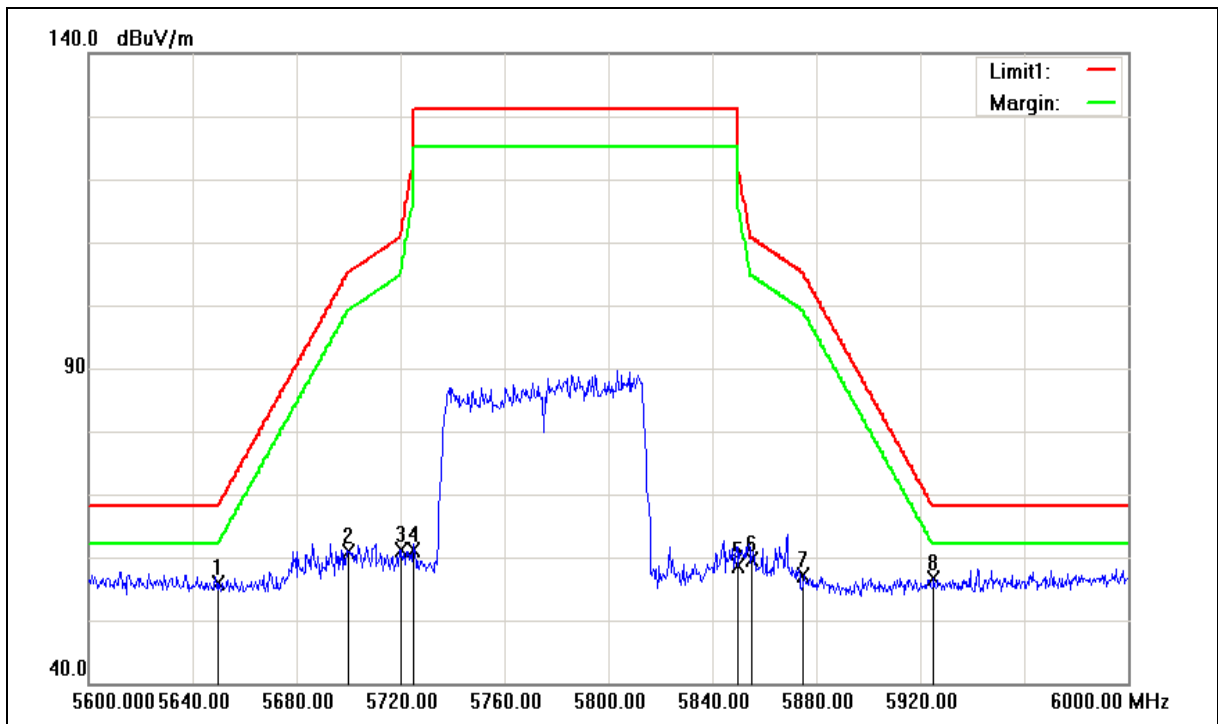



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5775MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	12/09/2016
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.87	8.93	55.80	68.20	-12.40	peak
2	5700.000	51.95	9.05	61.00	105.20	-44.20	peak
3	5720.000	52.09	9.09	61.18	110.80	-49.62	peak
4	5725.000	51.96	9.11	61.07	122.20	-61.13	peak
5	5850.000	49.23	9.41	58.64	122.20	-63.56	peak
6	5855.000	50.26	9.43	59.69	110.80	-51.11	peak
7	5875.000	47.73	9.48	57.21	105.20	-47.99	peak
8	5925.000	47.07	9.61	56.68	68.20	-11.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.


4.4. Maximum Conducted Output Power Measurement

■ Limit

Frequency Range (MHz)	FCC Maximum Conducted Output Power Limit
	Client
5.150 ~ 5.250 GHz	The lesser of 250mW (24dBm)
5.250 ~ 5.350 GHz	The lesser of 250mW (24dBm) or 11dBm + 10log (B)
5.470 ~ 5.725 GHz	The lesser of 250mW (24dBm) or 11dBm + 10log (B)
5.725 ~ 5.850 GHz	The lesser of 1W (30dBm)

According FCC KDB 662911 D01 v02r01 – for power measurements on IEEE802.11 devices,

■ Test Setup

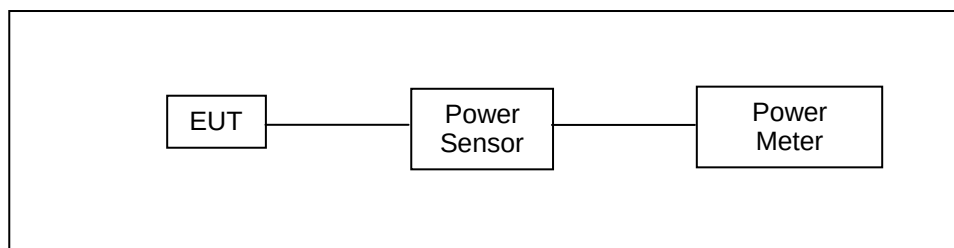

■ Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Power Sensor	Anritsu	MA2411B	1126022	08/29/2016	1 year
Power Meter	Anritsu	ML2495A	1135009	08/29/2016	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/23/2016	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

■ Test Procedure

The test is performed in accordance with KDB789033: D02 General UNII Test Procedures New Rules v01r04, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices

Section (E) Maximum Conducted Output Power

3. Measurement using a Power Meter (PM)

b) Method PM-G (Measurement using a gated RF average power meter)



Test Result

Test Mode		Mode 2: IEEE 802.11a Link Mode					
Frequency (MHz)	Data Rate	ANT-1		ANT-2		FCC Limit (dBm)	
		Max. Output Power					
		(dBm)	(W)	(dBm)	(W)		
5180	6M	14.99	0.032	14.89	0.031	≤ 24	
5200		15.13	0.033	15.10	0.032		
5220		15.14	0.033	15.11	0.032		
5240		14.98	0.031	14.93	0.031		
5260		14.93	0.031	14.85	0.031		
5280		14.85	0.031	14.81	0.030		
5300		14.67	0.029	14.64	0.029		
5320		14.58	0.029	14.52	0.028		
5500		14.36	0.027	14.29	0.027		
5520		14.46	0.028	14.39	0.027		
5540		14.53	0.028	14.43	0.028		
5560		14.67	0.029	14.58	0.029		
5580		14.47	0.028	14.37	0.027		
5660		14.79	0.030	14.77	0.030		
5680		14.73	0.030	14.68	0.029		
5700		14.66	0.029	14.63	0.029		
5745		14.82	0.030	14.72	0.030	≤ 30	
5765		14.77	0.030	14.71	0.030		
5785		14.72	0.030	14.68	0.029		
5805		14.67	0.029	14.60	0.029		
5825		14.55	0.029	14.46	0.028		

Note: The relevant measured result has the offset with cable loss already.



Test Mode		Mode 2: IEEE 802.11a Link Mode				
Frequency (MHz)	Data Rate	ANT-1		ANT-2		FCC Limit (dBm)
		Max. Output Power				
		(dBm)	(W)	(dBm)	(W)	
5180	54M	14.95	0.031	14.89	0.031	≤ 24
5200		15.04	0.032	14.96	0.031	
5220		15.10	0.032	15.01	0.032	
5240		14.96	0.031	14.89	0.031	
5260		14.83	0.030	14.79	0.030	
5280		14.81	0.030	14.77	0.030	
5300		14.59	0.029	14.56	0.029	
5320		14.49	0.028	14.45	0.028	
5500		14.33	0.027	14.31	0.027	
5520		14.43	0.028	14.38	0.027	
5540		14.49	0.028	14.44	0.028	
5560		14.65	0.029	14.61	0.029	
5580		14.40	0.028	14.31	0.027	
5660		14.76	0.030	14.71	0.030	
5680		14.63	0.029	14.58	0.029	
5700		14.63	0.029	14.55	0.029	
5745		14.80	0.030	14.73	0.030	≤ 30
5765		14.72	0.030	14.69	0.029	
5785		14.66	0.029	14.56	0.029	
5805		14.59	0.029	14.54	0.028	
5825		14.51	0.028	14.44	0.028	



Test Mode		Mode 3: IEEE 802.11ac 20MHz Link Mode					
Frequency (MHz)	Data Rate	ANT-1		ANT-2		FCC Limit (dBm)	
		Max. Output Power					
		(dBm)	(W)	(dBm)	(W)		
5180	6.5M	13.82	0.024	13.78	0.024	≤ 24	
5200		13.61	0.023	13.58	0.023		
5220		13.56	0.023	13.47	0.022		
5240		13.53	0.023	13.48	0.022		
5260		13.28	0.021	13.21	0.021		
5280		13.35	0.022	13.32	0.021		
5300		13.26	0.021	13.18	0.021		
5320		13.29	0.021	13.25	0.021		
5500		13.13	0.021	13.10	0.020		
5520		13.21	0.021	13.17	0.021		
5540		13.24	0.021	13.15	0.021		
5560		13.14	0.021	13.11	0.020		
5580		13.26	0.021	13.22	0.021		
5660		13.32	0.021	13.28	0.021		
5680		13.45	0.022	13.36	0.022		
5700		13.52	0.022	13.49	0.022		
5745		13.61	0.023	13.57	0.023	≤ 30	
5765		13.51	0.022	13.49	0.022		
5785		13.38	0.022	13.35	0.022		
5805		13.35	0.022	13.27	0.021		
5825		13.43	0.022	13.37	0.022		

Note: The relevant measured result has the offset with cable loss already.



Test Mode		Mode 3: IEEE 802.11ac 20MHz Link Mode				
Frequency (MHz)	Data Rate	ANT-1		ANT-2		FCC Limit (dBm)
		Max. Output Power				
		(dBm)	(W)	(dBm)	(W)	
5180	78M	13.78	0.024	13.70	0.023	≤ 24
5200		13.58	0.023	13.48	0.022	
5220		13.48	0.022	13.46	0.022	
5240		13.51	0.022	13.46	0.022	
5260		13.24	0.021	13.22	0.021	
5280		13.33	0.022	13.23	0.021	
5300		13.21	0.021	13.16	0.021	
5320		13.25	0.021	13.21	0.021	
5500		13.04	0.020	12.99	0.020	
5520		13.15	0.021	13.12	0.021	
5540		13.17	0.021	13.13	0.021	
5560		13.07	0.020	13.01	0.020	
5580		13.17	0.021	13.09	0.020	
5660		13.29	0.021	13.25	0.021	
5680		13.38	0.022	13.33	0.022	
5700		13.43	0.022	13.35	0.022	
5745		13.58	0.023	13.51	0.022	≤ 30
5765		13.44	0.022	13.42	0.022	
5785		13.30	0.021	13.25	0.021	
5805		13.31	0.021	13.23	0.021	
5825		13.38	0.022	13.32	0.021	

Note: The relevant measured result has the offset with cable loss already.



Test Mode		Mode 4: IEEE 802.11ac 40MHz Link Mode					
Frequency (MHz)	Data Rate	ANT-1		ANT-2		FCC Limit (dBm)	
		Max. Output Power					
		(dBm)	(W)	(dBm)	(W)		
5190	13.5M	12.83	0.019	12.78	0.019	≤ 24	
5230		12.76	0.019	12.68	0.019		
5270		12.43	0.017	12.38	0.017		
5310		12.49	0.018	12.46	0.018		
5510		12.38	0.017	12.32	0.017		
5550		12.46	0.018	12.43	0.017		
5670		12.56	0.018	12.51	0.018	≤ 30	
5755		12.59	0.018	12.56	0.018		
5795		12.46	0.018	12.41	0.017		
5190	180M	12.74	0.019	12.67	0.018	≤ 24	
5230		12.69	0.019	12.67	0.018		
5270		12.40	0.017	12.35	0.017		
5310		12.42	0.017	12.35	0.017		
5510		12.36	0.017	12.33	0.017		
5550		12.40	0.017	12.36	0.017		
5670		12.49	0.018	12.43	0.017	≤ 30	
5755		12.55	0.018	12.47	0.018		
5795		12.39	0.017	12.37	0.017		

Note: The relevant measured result has the offset with cable loss already.



Test Mode		Mode 5: IEEE 802.11ac 80MHz Link Mode				
Frequency (MHz)	Data Rate	ANT-1		ANT-2		FCC Limit (dBm)
		Max. Output Power				
		(dBm)	(W)	(dBm)	(W)	
5210	29.3M	10.56	0.011	10.53	0.011	≤ 24
5290		10.42	0.011	10.35	0.011	
5530		10.25	0.011	10.17	0.010	
5775		10.21	0.010	10.11	0.010	≤ 30
5210	390M	10.49	0.011	10.45	0.011	≤ 24
5290		10.33	0.011	10.25	0.011	
5530		10.18	0.010	10.14	0.010	
5775		10.17	0.010	10.12	0.010	≤ 30


Note: The relevant measured result has the offset with cable loss already.

4.5. 26dB RF Bandwidth Measurement

■ Limit

N/A

■ Test Setup

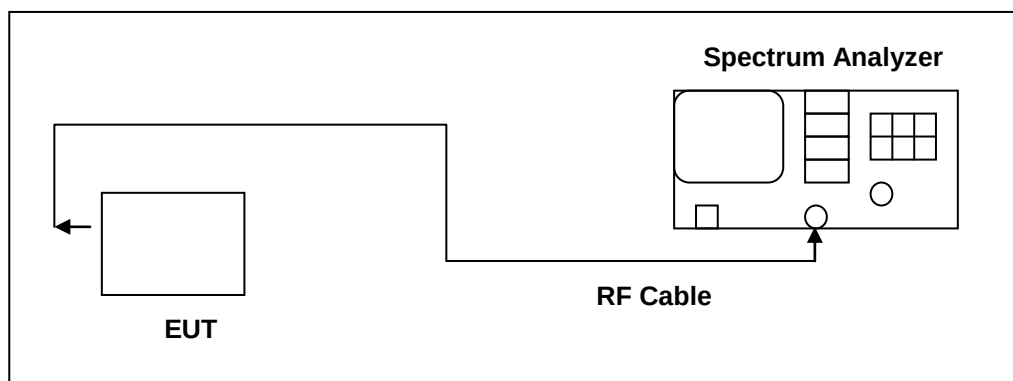

■ Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/15/2015	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/23/2016	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

■ Test Procedure

The test is performed in accordance with KDB789033: D02 General UNII Test Procedures New Rules v01r04, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	>26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto



■ Test Result




Mode	Frequency (MHz)	26dB Bandwidth (MHz)
		ANT-1
Mode 2	5180	21.011
	5200	21.558
	5240	20.214
	5260	20.363
	5280	21.685
	5320	20.201
	5500	22.080
	5560	21.346
	5700	20.495
Mode 3	5180	21.742
	5200	20.188
	5240	20.142
	5260	20.141
	5280	20.537
	5320	20.024
	5500	20.458
	5560	20.003
	5700	21.066
Mode 4	5190	44.085
	5230	44.826
	5270	44.888
	5310	43.969
	5510	43.688
	5550	43.626
	5670	43.751
Mode 5	5210	82.909
	5290	83.986
	5530	82.679



■ Test Graphs

Mode 2: IEEE 802.11a Link Mode_ ANT-1	
5180 MHz	Agilent R T Freq/Channel Ch Freq 5.18 GHz Trig Free Center Freq 5.1800000 GHz Start Freq 5.1650000 GHz Stop Freq 5.1950000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Center 5.180 00 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts) Occupied Bandwidth 16.7752 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -7.704 kHz x dB Bandwidth 21.011 MHz Copyright 2000-2006 Agilent Technologies
5200 MHz	Agilent R T Freq/Channel Ch Freq 5.2 GHz Trig Free Center Freq 5.2000000 GHz Start Freq 5.1850000 GHz Stop Freq 5.2150000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Center 5.200 00 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts) Occupied Bandwidth 16.6753 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -11.314 kHz x dB Bandwidth 21.558 MHz Copyright 2000-2006 Agilent Technologies
5240 MHz	Agilent R T Freq/Channel Ch Freq 5.24 GHz Trig Free Center Freq 5.2400000 GHz Start Freq 5.2250000 GHz Stop Freq 5.2550000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Center 5.240 00 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts) Occupied Bandwidth 16.7742 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -8.049 kHz x dB Bandwidth 20.214 MHz Copyright 2000-2006 Agilent Technologies

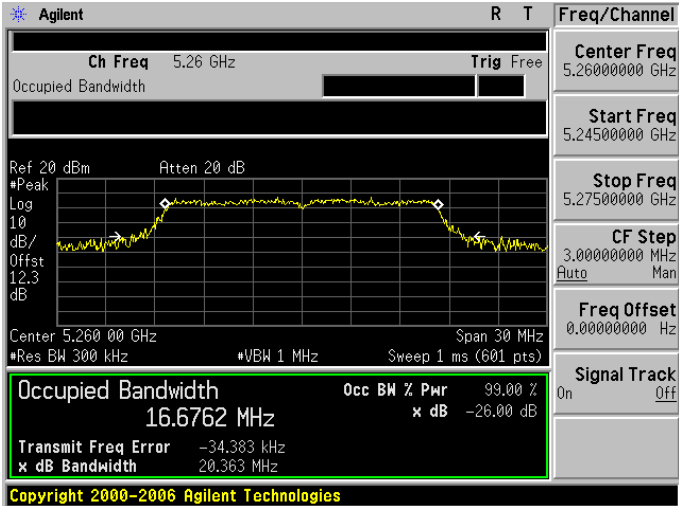
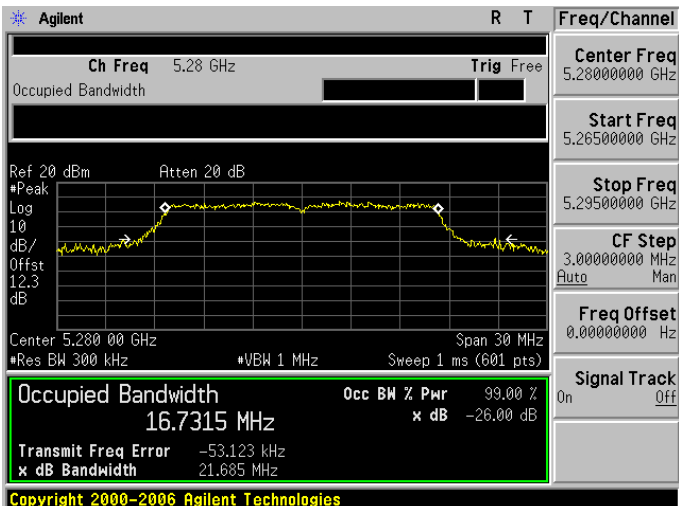
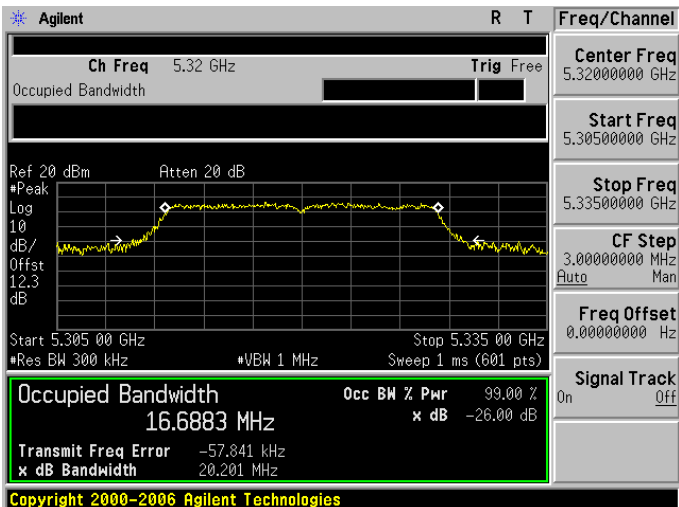


Mode 2: IEEE 802.11a Link Mode_ ANT-1	
5260 MHz	 Agilent R T Freq/Channel Ch Freq 5.26 GHz Trig Free Center Freq 5.2600000 GHz Start Freq 5.2450000 GHz Stop Freq 5.2750000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Center 5.260 00 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts) Occupied Bandwidth 16.6762 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -34.383 kHz x dB Bandwidth 20.363 MHz Copyright 2000-2006 Agilent Technologies
5280 MHz	 Agilent R T Freq/Channel Ch Freq 5.28 GHz Trig Free Center Freq 5.2800000 GHz Start Freq 5.2650000 GHz Stop Freq 5.2950000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Center 5.280 00 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts) Occupied Bandwidth 16.7315 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -53.123 kHz x dB Bandwidth 21.685 MHz Copyright 2000-2006 Agilent Technologies
5320 MHz	 Agilent R T Freq/Channel Ch Freq 5.32 GHz Trig Free Center Freq 5.3200000 GHz Start Freq 5.3050000 GHz Stop Freq 5.3350000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Start 5.305 00 GHz Stop 5.335 00 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts) Occupied Bandwidth 16.6883 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -57.841 kHz x dB Bandwidth 20.201 MHz Copyright 2000-2006 Agilent Technologies






Mode 2: IEEE 802.11a Link Mode_ ANT-1	
5500 MHz	Agilent R T Freq/Channel Ch Freq 5.5 GHz Trig Free Center Freq 5.5000000 GHz Start Freq 5.4850000 GHz Stop Freq 5.5150000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/ Offst 12.3 dB Center 5.500 00 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts) Occupied Bandwidth 16.7502 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -17.755 kHz x dB Bandwidth 22.080 MHz Copyright 2000-2006 Agilent Technologies
5560 MHz	Agilent R T Freq/Channel Ch Freq 5.56 GHz Trig Free Center Freq 5.5600000 GHz Start Freq 5.5450000 GHz Stop Freq 5.5750000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/ Offst 12.3 dB Center 5.560 00 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts) Occupied Bandwidth 16.6757 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 38.235 kHz x dB Bandwidth 21.346 MHz Copyright 2000-2006 Agilent Technologies
5700 MHz	Agilent R T Freq/Channel Ch Freq 5.7 GHz Trig Free Center Freq 5.7000000 GHz Start Freq 5.6850000 GHz Stop Freq 5.7150000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/ Offst 12.3 dB Center 5.700 00 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts) Occupied Bandwidth 16.7052 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -42.648 kHz x dB Bandwidth 20.495 MHz Copyright 2000-2006 Agilent Technologies

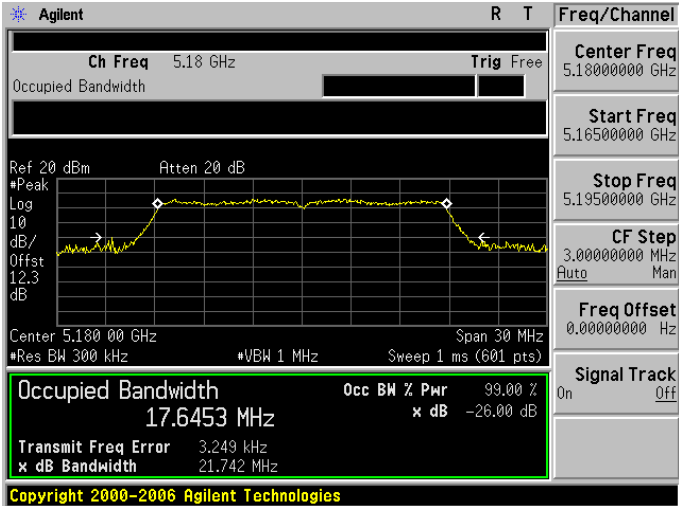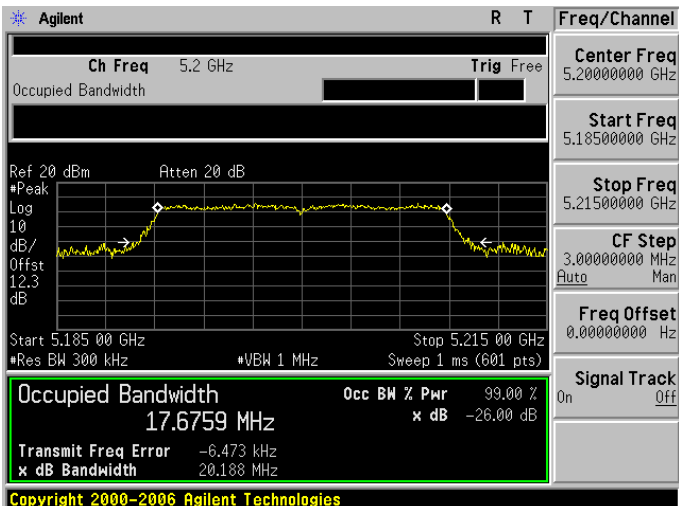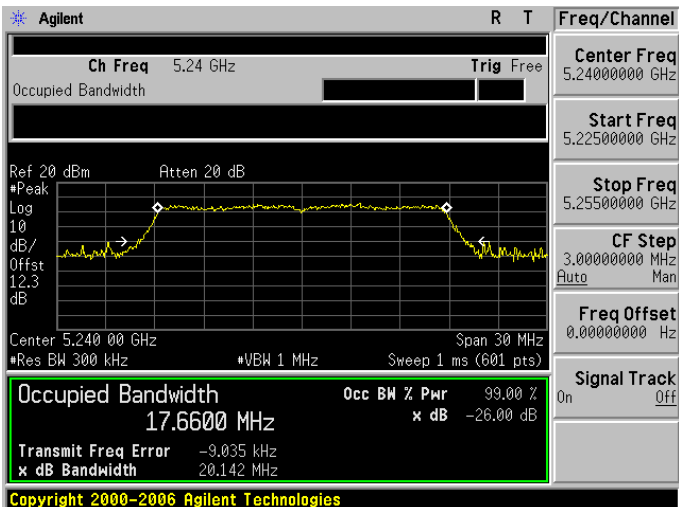


Mode 3: IEEE 802.11ac 20MHz Link Mode_ ANT-1	
5180 MHz	 Agilent R T Freq/Channel Ch Freq 5.18 GHz Trig Free Center Freq 5.1800000 GHz Start Freq 5.1650000 GHz Stop Freq 5.1950000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Center 5.180 00 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts) Occupied Bandwidth 17.6453 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 3.249 kHz x dB Bandwidth 21.742 MHz Copyright 2000-2006 Agilent Technologies
5200 MHz	 Agilent R T Freq/Channel Ch Freq 5.2 GHz Trig Free Center Freq 5.2000000 GHz Start Freq 5.1850000 GHz Stop Freq 5.2150000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Start 5.185 00 GHz Stop 5.215 00 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts) Occupied Bandwidth 17.6759 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -6.473 kHz x dB Bandwidth 20.188 MHz Copyright 2000-2006 Agilent Technologies
5240 MHz	 Agilent R T Freq/Channel Ch Freq 5.24 GHz Trig Free Center Freq 5.2400000 GHz Start Freq 5.2250000 GHz Stop Freq 5.2550000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Center 5.240 00 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts) Occupied Bandwidth 17.6600 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -9.035 kHz x dB Bandwidth 20.142 MHz Copyright 2000-2006 Agilent Technologies

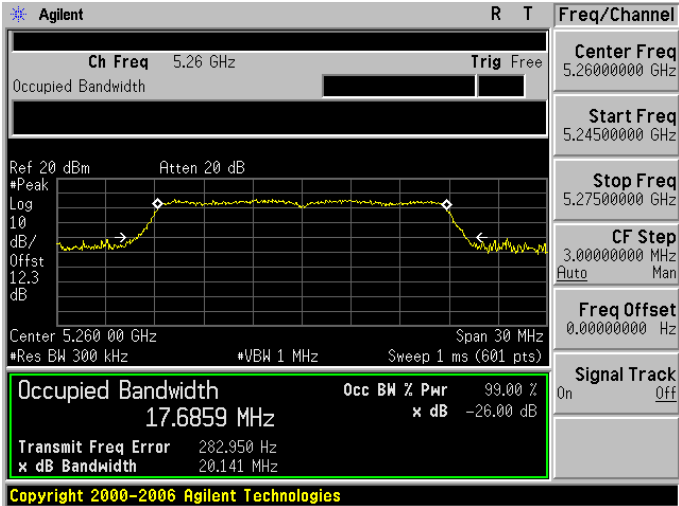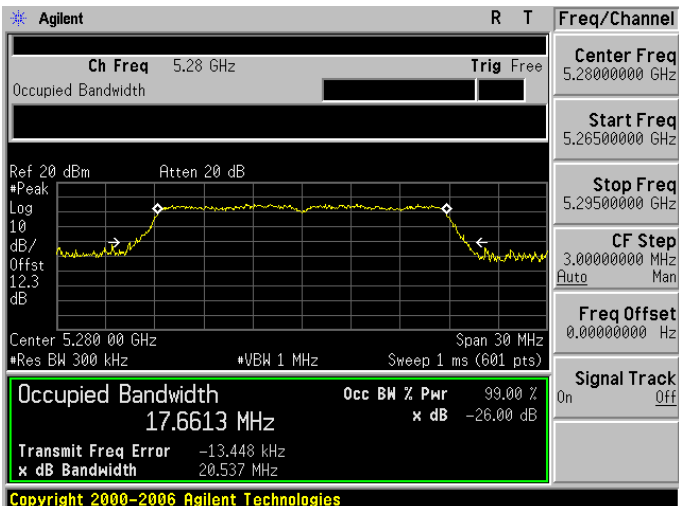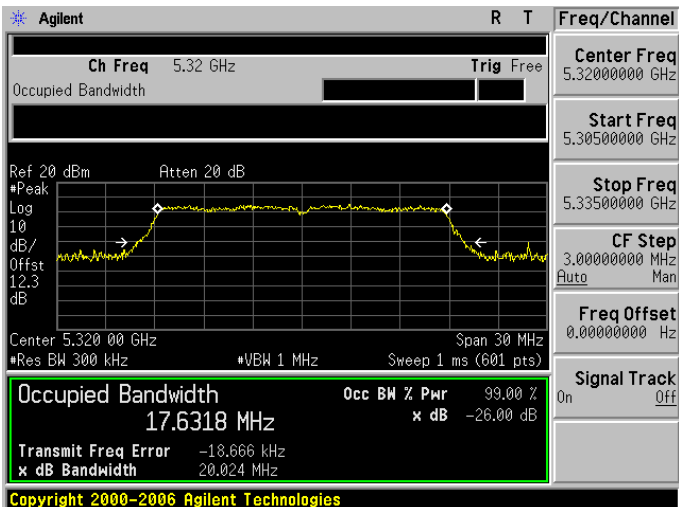


Mode 3: IEEE 802.11ac 20MHz Link Mode_ ANT-1	
5260 MHz	 Agilent R T Freq/Channel Ch Freq 5.26 GHz Trig Free Center Freq 5.2600000 GHz Start Freq 5.2450000 GHz Stop Freq 5.2750000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Center 5.260 00 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts) Occupied Bandwidth 17.6859 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 282.950 Hz x dB Bandwidth 20.141 MHz Copyright 2000-2006 Agilent Technologies
5280 MHz	 Agilent R T Freq/Channel Ch Freq 5.28 GHz Trig Free Center Freq 5.2800000 GHz Start Freq 5.2650000 GHz Stop Freq 5.2950000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Center 5.280 00 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts) Occupied Bandwidth 17.6613 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -13.448 kHz x dB Bandwidth 20.537 MHz Copyright 2000-2006 Agilent Technologies
5320 MHz	 Agilent R T Freq/Channel Ch Freq 5.32 GHz Trig Free Center Freq 5.3200000 GHz Start Freq 5.3050000 GHz Stop Freq 5.3350000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Center 5.320 00 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts) Occupied Bandwidth 17.6318 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -18.666 kHz x dB Bandwidth 20.024 MHz Copyright 2000-2006 Agilent Technologies






Mode 3: IEEE 802.11ac 20MHz Link Mode_ ANT-1	
5500 MHz	Agilent R T Freq/Channel Ch Freq 5.5 GHz Trig Free Center Freq 5.5000000 GHz Start Freq 5.4850000 GHz Stop Freq 5.5150000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Center 5.500 00 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts) Occupied Bandwidth 17.6527 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 4.521 kHz x dB Bandwidth 20.458 MHz Copyright 2000-2006 Agilent Technologies
5560 MHz	Agilent R T Freq/Channel Ch Freq 5.56 GHz Trig Free Center Freq 5.5600000 GHz Start Freq 5.5450000 GHz Stop Freq 5.5750000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Start 5.545 00 GHz Stop 5.575 00 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts) Occupied Bandwidth 17.6549 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 2.156 kHz x dB Bandwidth 20.003 MHz Copyright 2000-2006 Agilent Technologies
5700 MHz	Agilent R T Freq/Channel Ch Freq 5.7 GHz Trig Free Center Freq 5.7000000 GHz Start Freq 5.6850000 GHz Stop Freq 5.7150000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Center 5.700 00 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 1 ms (601 pts) Occupied Bandwidth 17.6685 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 3.780 kHz x dB Bandwidth 21.066 MHz Copyright 2000-2006 Agilent Technologies

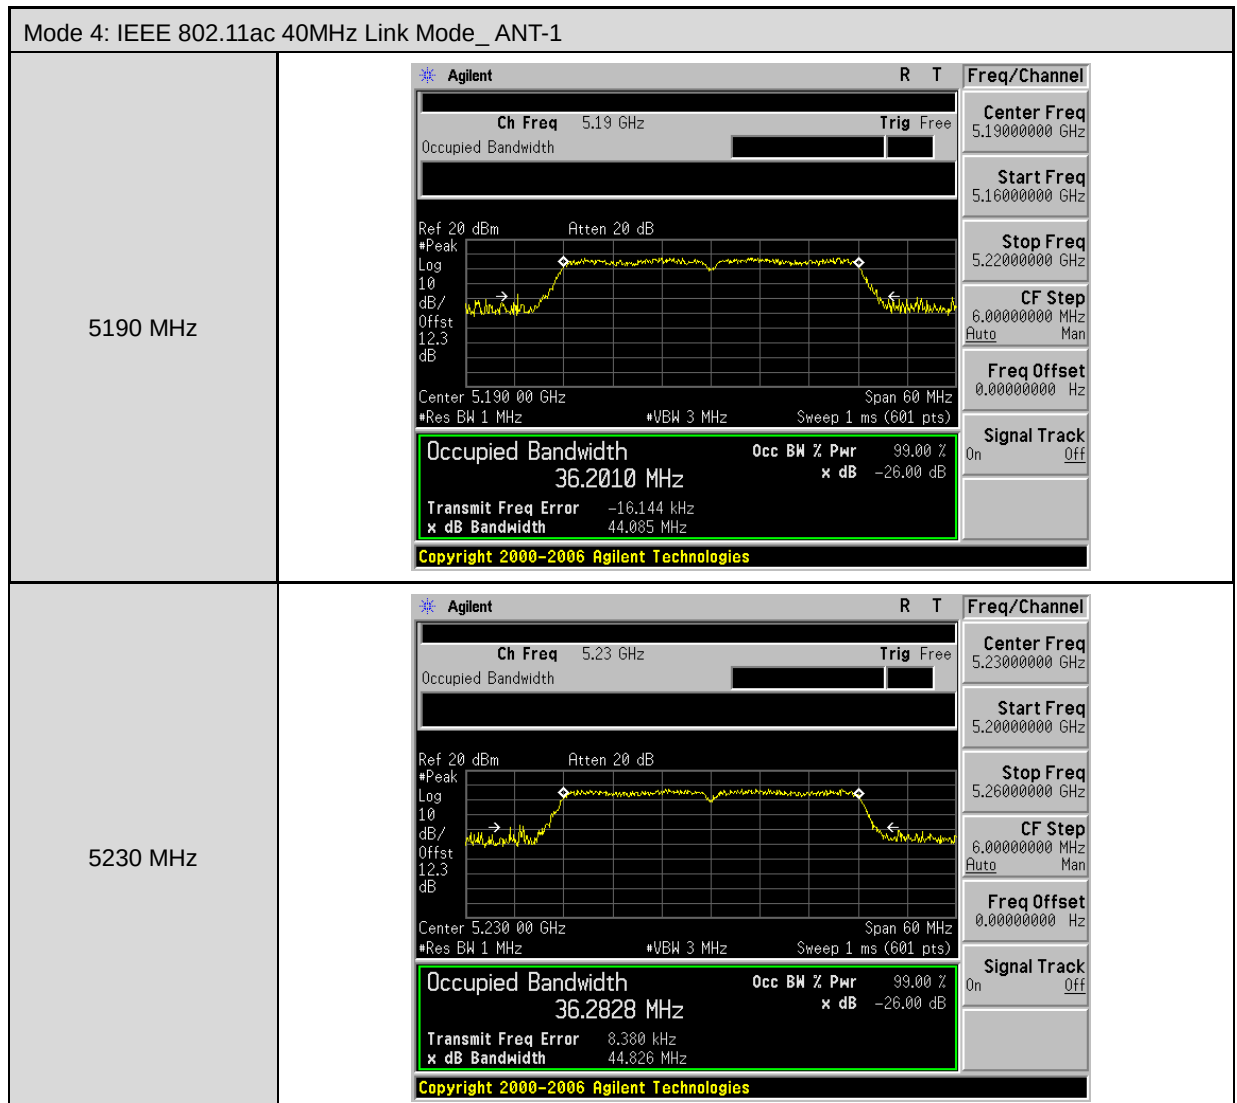

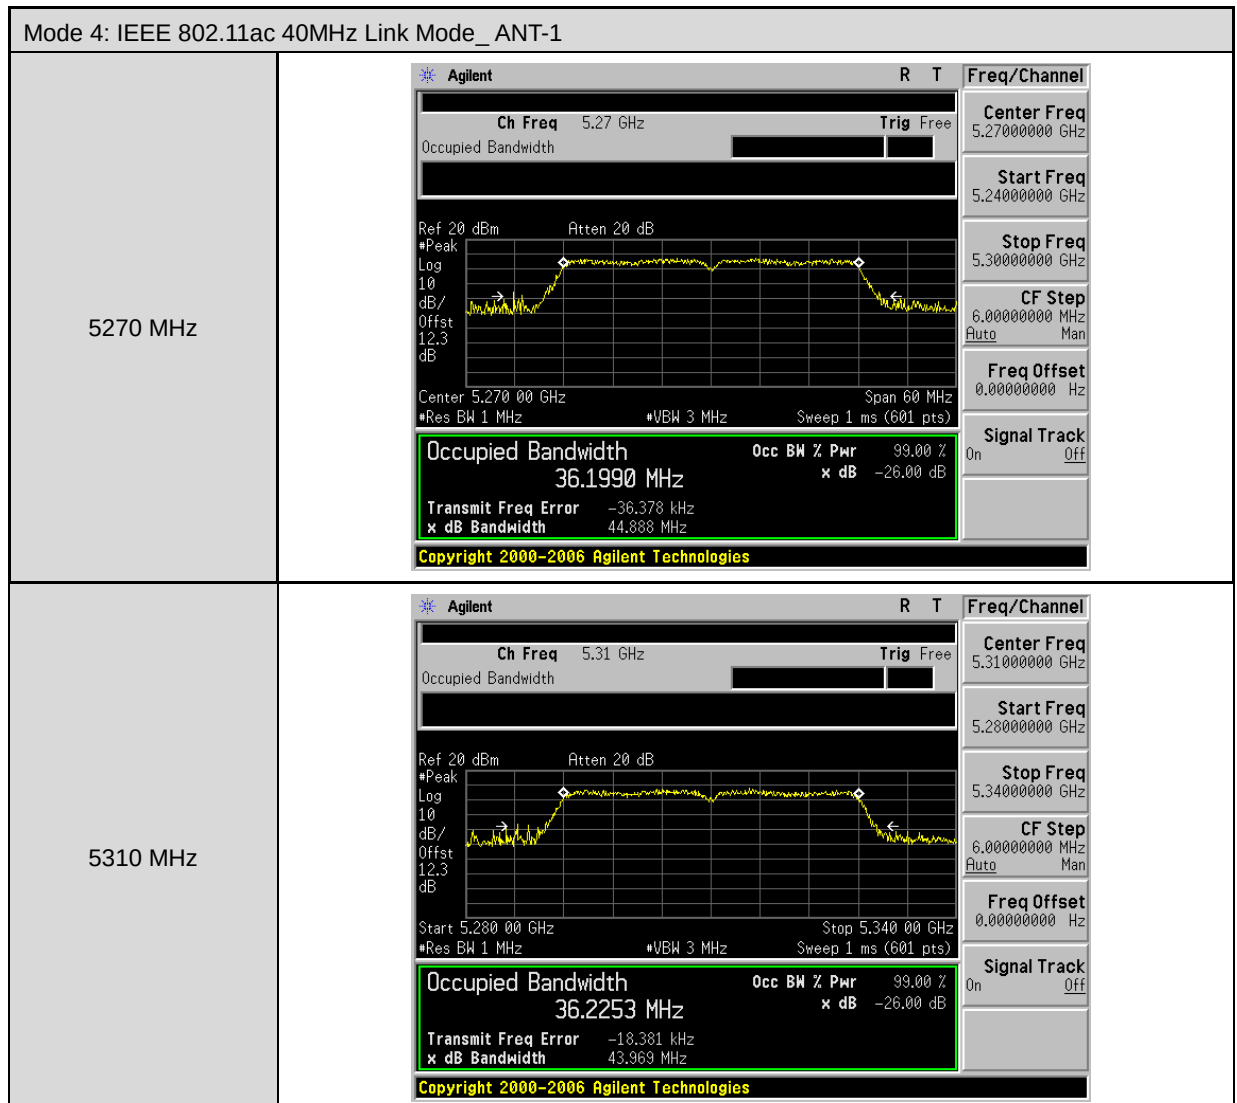

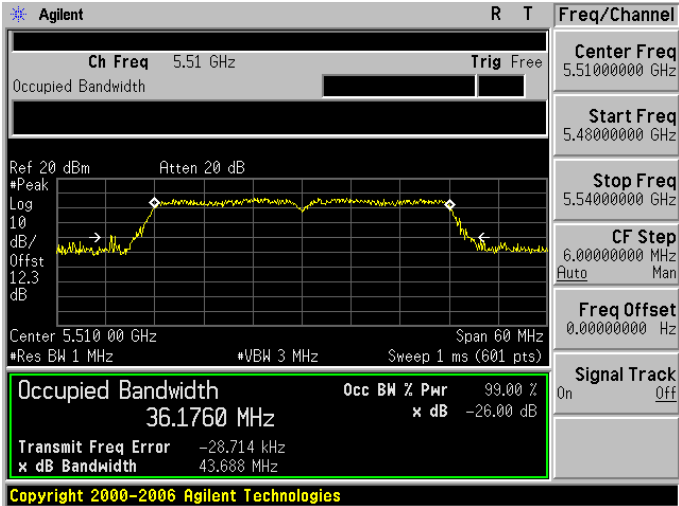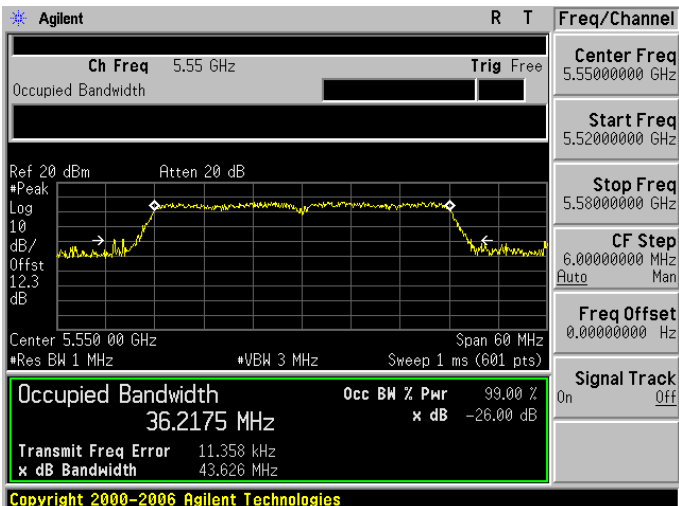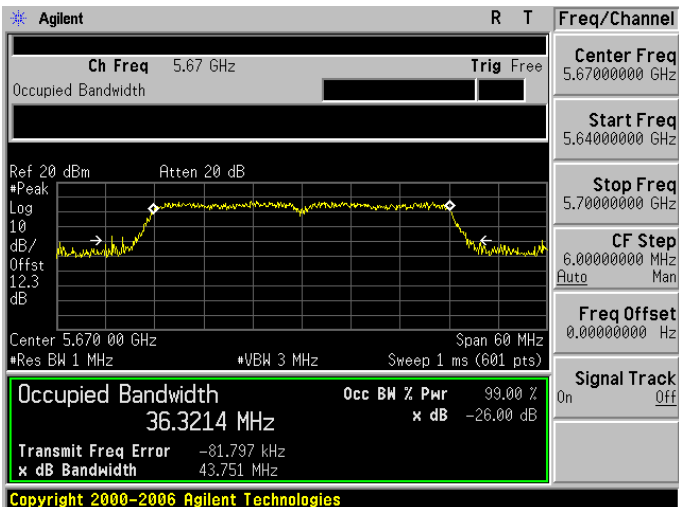

Mode 4: IEEE 802.11ac 40MHz Link Mode_ ANT-1	
5510 MHz	 Agilent R T Freq/Channel Ch Freq 5.51 GHz Trig Free Center Freq 5.5100000 GHz Start Freq 5.4800000 GHz Stop Freq 5.5400000 GHz CF Step 6.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Center 5.510 00 GHz Span 60 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 1 ms (601 pts) Occupied Bandwidth 36.1760 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -28.714 kHz x dB Bandwidth 43.688 MHz Copyright 2000-2006 Agilent Technologies
5550 MHz	 Agilent R T Freq/Channel Ch Freq 5.55 GHz Trig Free Center Freq 5.5500000 GHz Start Freq 5.5200000 GHz Stop Freq 5.5800000 GHz CF Step 6.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Center 5.550 00 GHz Span 60 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 1 ms (601 pts) Occupied Bandwidth 36.2175 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 11.358 kHz x dB Bandwidth 43.626 MHz Copyright 2000-2006 Agilent Technologies
5670 MHz	 Agilent R T Freq/Channel Ch Freq 5.67 GHz Trig Free Center Freq 5.6700000 GHz Start Freq 5.6400000 GHz Stop Freq 5.7000000 GHz CF Step 6.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Center 5.670 00 GHz Span 60 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 1 ms (601 pts) Occupied Bandwidth 36.3214 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -81.797 kHz x dB Bandwidth 43.751 MHz Copyright 2000-2006 Agilent Technologies



Mode 5: IEEE 802.11ac 80MHz Link Mode_ ANT-1	
5210 MHz	Agilent R T Freq/Channel Ch Freq 5.21 GHz Trig Free Center Freq 5.2100000 GHz Start Freq 5.1600000 GHz Stop Freq 5.2600000 GHz CF Step 10.000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Center 5.210 0 GHz Span 100 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 1 ms (601 pts) Occupied Bandwidth 76.2610 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 13.131 kHz x dB Bandwidth 82.909 MHz Copyright 2000-2006 Agilent Technologies
5290 MHz	Agilent R T Freq/Channel Ch Freq 5.29 GHz Trig Free Center Freq 5.2900000 GHz Start Freq 5.2400000 GHz Stop Freq 5.3400000 GHz CF Step 10.000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Center 5.290 0 GHz Span 100 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 1 ms (601 pts) Occupied Bandwidth 76.0897 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -17.561 kHz x dB Bandwidth 83.986 MHz Copyright 2000-2006 Agilent Technologies
5530 MHz	Agilent R T Freq/Channel Ch Freq 5.53 GHz Trig Free Center Freq 5.5300000 GHz Start Freq 5.4800000 GHz Stop Freq 5.5800000 GHz CF Step 10.000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Center 5.530 0 GHz Span 100 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 1 ms (601 pts) Occupied Bandwidth 75.9571 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 41.058 kHz x dB Bandwidth 82.679 MHz Copyright 2000-2006 Agilent Technologies


4.6. 6dB RF Bandwidth Measurement

■ Limit

6dB RF Bandwidth

Systems using digital modulation techniques may operate in the 5725~5850MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

■ Test Setup

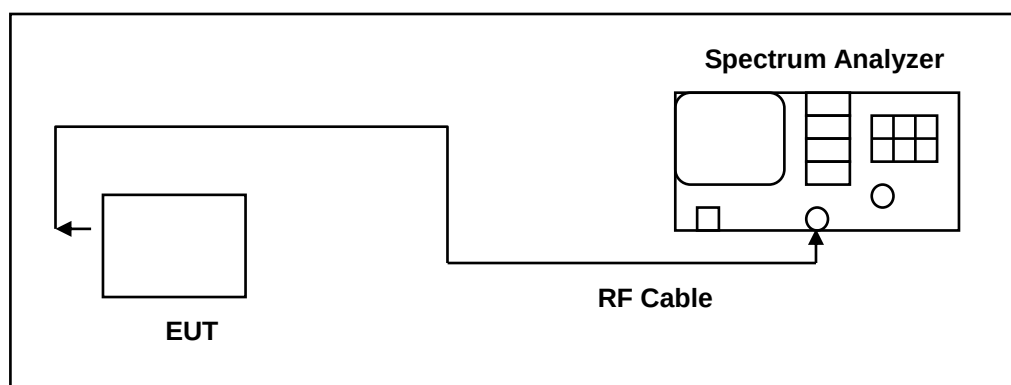

■ Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/15/2015	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

■ Test Procedure

6dB RF Bandwidth

The EUT tested to UNII test procedure of KDB789033 D02 v01r04 for compliance to FCC 47CFR 15.407 requirements.

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels.






■ Test Result




Mode	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)
		ANT-1	
Mode 2	5745	16368	> 500
	5785	16396	> 500
	5825	16454	> 500
Mode 3	5745	16996	> 500
	5785	17341	> 500
	5825	17569	> 500
Mode 4	5755	35512	> 500
	5795	35370	> 500
Mode 5	5775	76468	> 500






■ Test Graphs

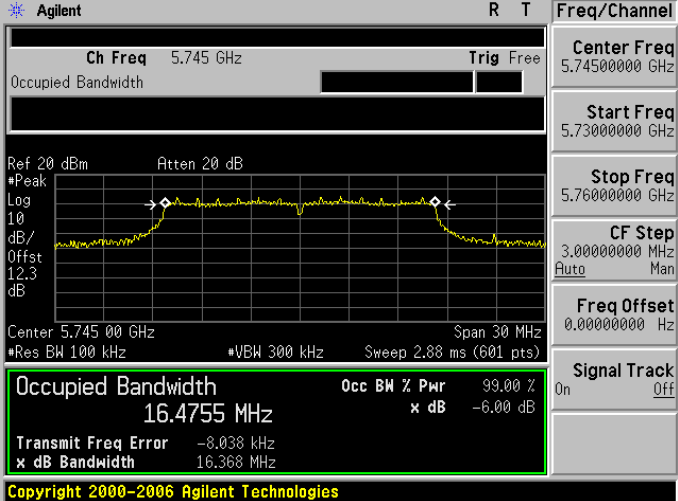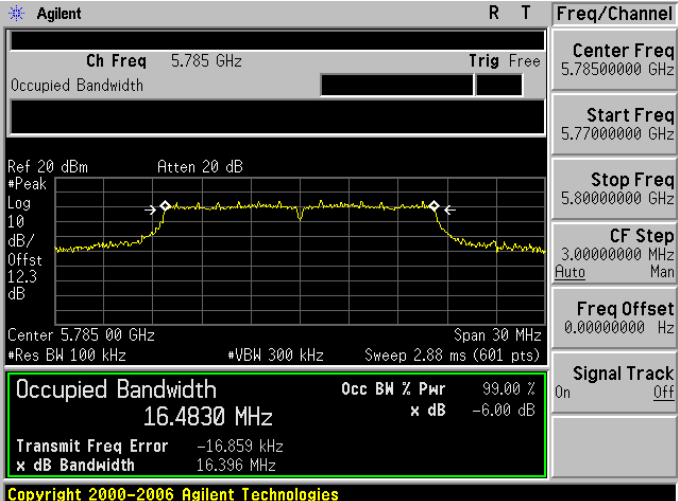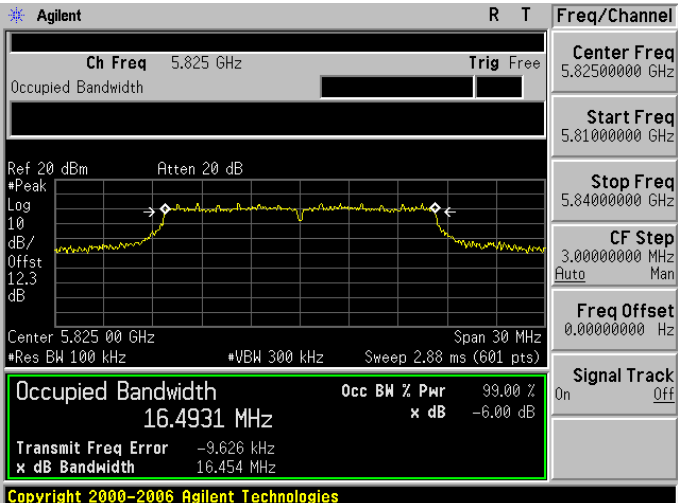Mode 2: IEEE 802.11a Link Mode_ANT-1	
5745 MHz	 Agilent R T Freq/Channel Ch Freq 5.745 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 20 dB #Peak Log 10 dB/ Offst 12.3 dB Center 5.745 00 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 16.4755 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -8.038 kHz x dB Bandwidth 16.368 MHz Copyright 2000-2006 Agilent Technologies Center Freq 5.74500000 GHz Start Freq 5.73000000 GHz Stop Freq 5.76000000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
5785 MHz	 Agilent R T Freq/Channel Ch Freq 5.785 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 20 dB #Peak Log 10 dB/ Offst 12.3 dB Center 5.785 00 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 16.4830 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -16.859 kHz x dB Bandwidth 16.396 MHz Copyright 2000-2006 Agilent Technologies Center Freq 5.78500000 GHz Start Freq 5.77000000 GHz Stop Freq 5.80000000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
5825 MHz	 Agilent R T Freq/Channel Ch Freq 5.825 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 20 dB #Peak Log 10 dB/ Offst 12.3 dB Center 5.825 00 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 16.4931 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -9.626 kHz x dB Bandwidth 16.454 MHz Copyright 2000-2006 Agilent Technologies Center Freq 5.82500000 GHz Start Freq 5.81000000 GHz Stop Freq 5.84000000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off

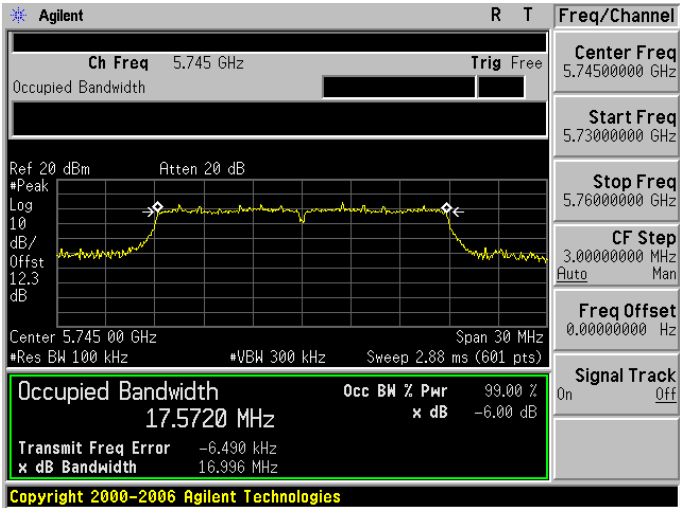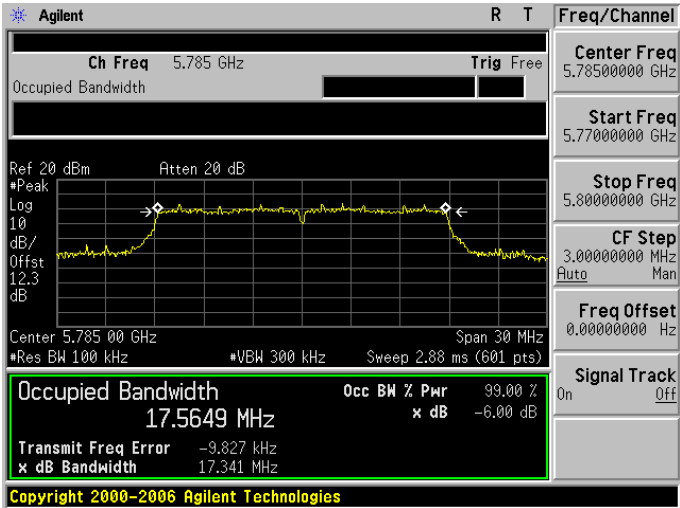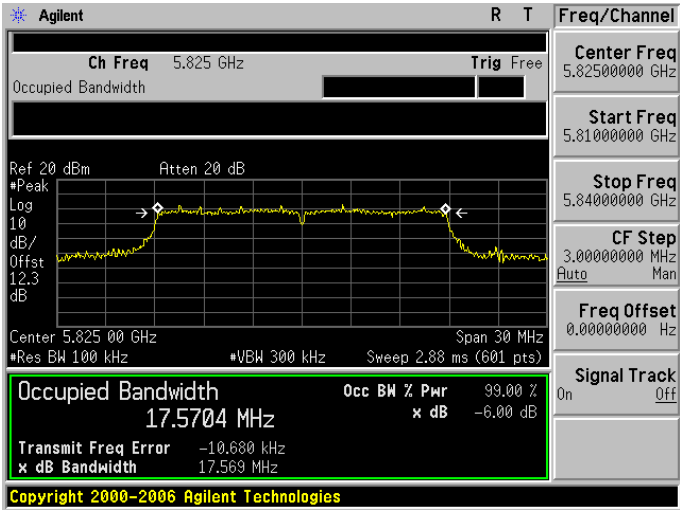

Mode 3: IEEE 802.11ac 20MHz Link Mode_ANT-1	
5745 MHz	 Agilent R T Freq/Channel Ch Freq 5.745 GHz Trig Free Center Freq 5.7450000 GHz Start Freq 5.7300000 GHz Stop Freq 5.7600000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Center 5.745 00 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 17.5720 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -6.490 kHz x dB Bandwidth 16.996 MHz Copyright 2000-2006 Agilent Technologies
5785 MHz	 Agilent R T Freq/Channel Ch Freq 5.785 GHz Trig Free Center Freq 5.7850000 GHz Start Freq 5.7700000 GHz Stop Freq 5.8000000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Center 5.785 00 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 17.5649 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -9.827 kHz x dB Bandwidth 17.341 MHz Copyright 2000-2006 Agilent Technologies
5825 MHz	 Agilent R T Freq/Channel Ch Freq 5.825 GHz Trig Free Center Freq 5.8250000 GHz Start Freq 5.8100000 GHz Stop Freq 5.8400000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Center 5.825 00 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.88 ms (601 pts) Occupied Bandwidth 17.5704 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -10.680 kHz x dB Bandwidth 17.569 MHz Copyright 2000-2006 Agilent Technologies

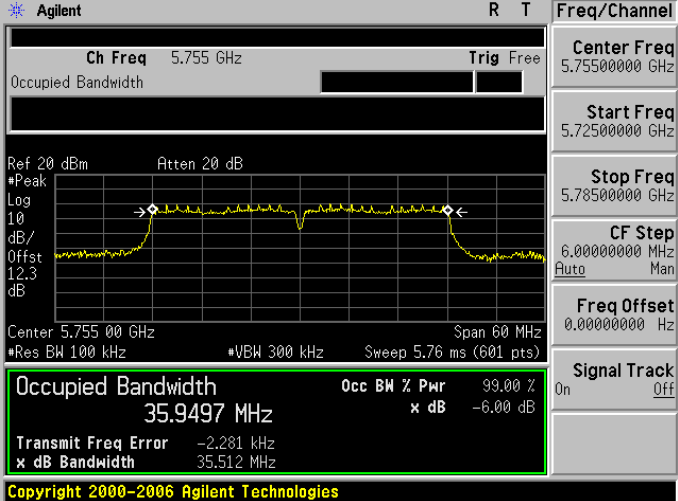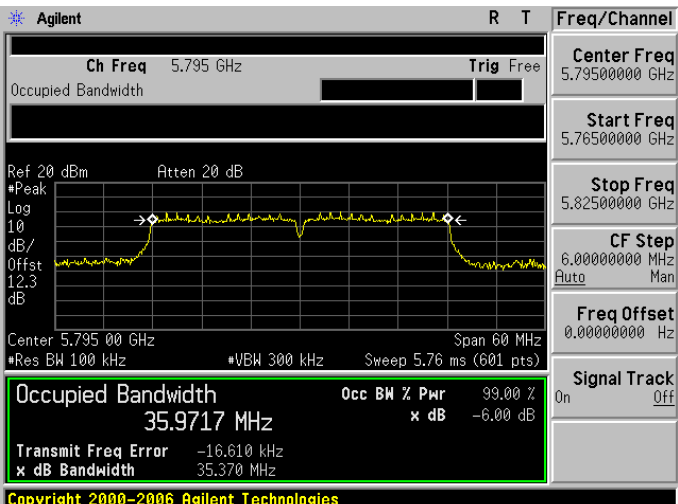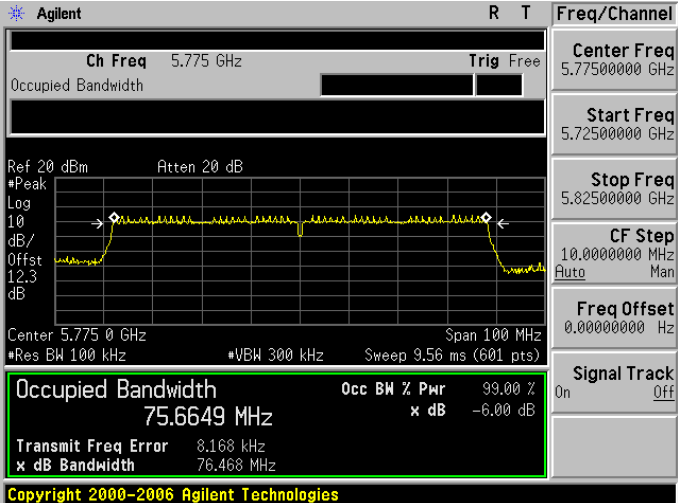

Mode 4: IEEE 802.11ac 40MHz Link Mode_ANT-1	
5755 MHz	 Agilent R T Freq/Channel Ch Freq 5.755 GHz Trig Free Center Freq 5.7550000 GHz Start Freq 5.7250000 GHz Stop Freq 5.7850000 GHz CF Step 6.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Center 5.755 00 GHz Span 60 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5.76 ms (601 pts) Occupied Bandwidth 35.9497 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -2.281 kHz x dB Bandwidth 35.512 MHz Copyright 2000-2006 Agilent Technologies
5795 MHz	 Agilent R T Freq/Channel Ch Freq 5.795 GHz Trig Free Center Freq 5.7950000 GHz Start Freq 5.7650000 GHz Stop Freq 5.8250000 GHz CF Step 6.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Center 5.795 00 GHz Span 60 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5.76 ms (601 pts) Occupied Bandwidth 35.9717 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -16.610 kHz x dB Bandwidth 35.370 MHz Copyright 2000-2006 Agilent Technologies
Mode 5: IEEE 802.11ac 80MHz Link Mode_ANT-1	
5775 MHz	 Agilent R T Freq/Channel Ch Freq 5.775 GHz Trig Free Center Freq 5.7750000 GHz Start Freq 5.7250000 GHz Stop Freq 5.8250000 GHz CF Step 10.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Ref 20 dBm Atten 20 dB #Peak Log 10 dB/Offst 12.3 dB Center 5.775 0 GHz Span 100 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 9.56 ms (601 pts) Occupied Bandwidth 75.6649 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 8.168 kHz x dB Bandwidth 76.468 MHz Copyright 2000-2006 Agilent Technologies

4.7. Peak Power Spectral Density Measurement


■ Limit

Conducted power spectral density

Frequency Range (MHz)	FCC Limit
	Client
5.150 ~ 5.250 GHz	11 dBm/MHz
5.250 ~ 5.350 GHz	11 dBm/MHz
5.470 ~ 5.725 GHz	11 dBm/MHz
5.725 ~ 5.850 GHz	30 dBm/500KHz

According FCC KDB 662911 D01 v02r01 – for power measurements on IEEE802.11 devices,

■ Test Setup

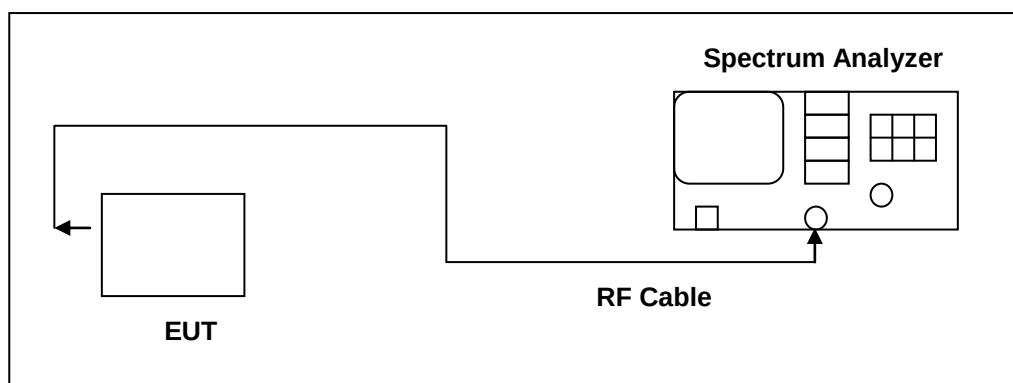

■ Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/15/2015	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

**■ Test Procedure**

The test is performed in accordance with KDB789033: D02 General UNII Test Procedures New Rules v01r04, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz (5725 ~ 5850MHz use 100 kHz)
VBW	3 MHz (5725 ~ 5850MHz use 300 kHz)
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times
Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/100\text{kHz})$ to the measured result.	

Test Result

Test Mode	Mode 2: IEEE 802.11a link mode			
Frequency (MHz)	ANT-1			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5180	5.389	0.000	5.389	< 11
5200	5.568	0.000	5.568	
5240	5.237	0.000	5.237	
5260	5.210	0.000	5.210	
5280	5.702	0.000	5.702	
5320	5.005	0.000	5.005	
5500	5.431	0.000	5.431	
5560	5.529	0.000	5.529	
5700	5.054	0.000	5.054	

Note: Method SA-2, Power density = measured result + 10log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Test Mode	Mode 2: IEEE 802.11a link mode			
Frequency (MHz)	ANT-1			
	Measurement (dBm/100KHz)	Duty Factor (dB)	Calculated (dBm/500KHz)	Limit (dBm/500KHz)
5745	-3.40	0.000	3.592	< 30
5785	-3.58	0.000	3.409	
5825	-4.23	0.000	2.760	

Note: Method SA-2, Power density = measured result + 10log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10*Log(500k/100k)



Test Mode	Mode 3: IEEE 802.11ac 20MHz Link Mode			
Frequency (MHz)	ANT-1			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5180	3.950	0.000	3.950	< 11
5200	3.844	0.000	3.844	
5240	4.008	0.000	4.008	
5260	3.880	0.000	3.880	
5280	3.719	0.000	3.719	
5320	3.413	0.000	3.413	
5500	3.446	0.000	3.446	
5560	3.461	0.000	3.461	
5700	3.875	0.000	3.875	

Note: Method SA-2, Power density = measured result + 10log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Test Mode	Mode 3: IEEE 802.11ac 20MHz Link Mode			
Frequency (MHz)	ANT-1			
	Measurement (dBm/100KHz)	Duty Factor (dB)	Calculated (dBm/500KHz)	Limit (dBm/500KHz)
5745	-4.97	0.000	2.017	< 30
5785	-5.51	0.000	1.476	
5825	-5.53	0.000	1.462	

Note: Method SA-2, Power density = measured result + 10log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10*Log(500k/100k)



Test Mode	Mode 4: IEEE 802.11ac 40MHz Link Mode			
Frequency (MHz)	ANT-1			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5190	0.051	0.000	0.051	< 11
5230	-0.095	0.000	-0.095	
5270	0.028	0.000	0.028	
5310	-0.010	0.000	-0.010	
5510	-0.212	0.000	-0.212	
5550	-0.220	0.000	-0.220	
5670	-0.291	0.000	-0.291	

Note: Method SA-2, Power density = measured result + $10\log(1/\text{duty cycle})$ + Conversion ratio = measured result + duty factor.

Test Mode	Mode 4: IEEE 802.11ac 40MHz Link Mode			
Frequency (MHz)	ANT-1			
	Measurement (dBm/100KHz)	Duty Factor (dB)	Calculated (dBm/500KHz)	Limit (dBm/500KHz)
5755	-8.67	0.000	-1.679	< 30
5795	-8.47	0.000	-1.478	

Note: Method SA-2, Power density = measured result + $10\log(1/\text{duty cycle})$ + Conversion ratio = measured result + duty factor.

Conversion ratio = $10 \cdot \log(500\text{k}/100\text{k})$



Test Mode	Mode 5: IEEE 802.11ac 80MHz Link Mode			
Frequency (MHz)	ANT-1			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5210	-5.539	0.000	-5.539	< 11
5290	-5.919	0.000	-5.919	
5530	-5.949	0.000	-5.949	

Note: Method SA-2, Power density = measured result + $10\log(1/\text{duty cycle})$ + Conversion ratio = measured result + duty factor.




Test Mode	Mode 5: IEEE 802.11ac 80MHz Link Mode			
Frequency (MHz)	ANT-1			
	Measurement (dBm/100KHz)	Duty Factor (dB)	Calculated (dBm/500KHz)	Limit (dBm/MHz)
5775	-14.596	0.000	-7.606	< 30

Note: Method SA-2, Power density = measured result + $10\log(1/\text{duty cycle})$ + Conversion ratio = measured result + duty factor.




Conversion ratio = $10 \cdot \log(500\text{k}/100\text{k})$






■ Test Graphs

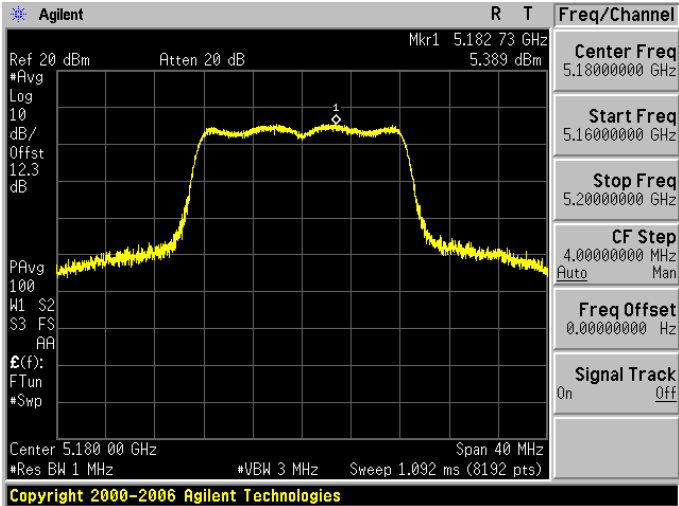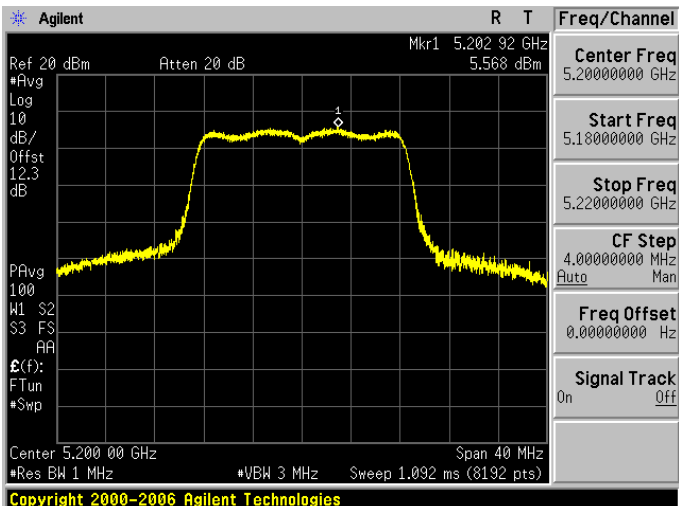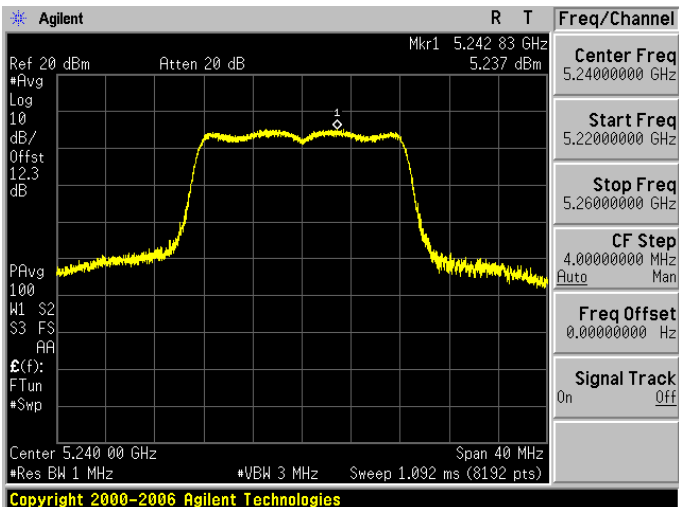Mode 2: IEEE 802.11a Link Mode_ ANT-1	
5180 MHz	
5200 MHz	
5240 MHz	

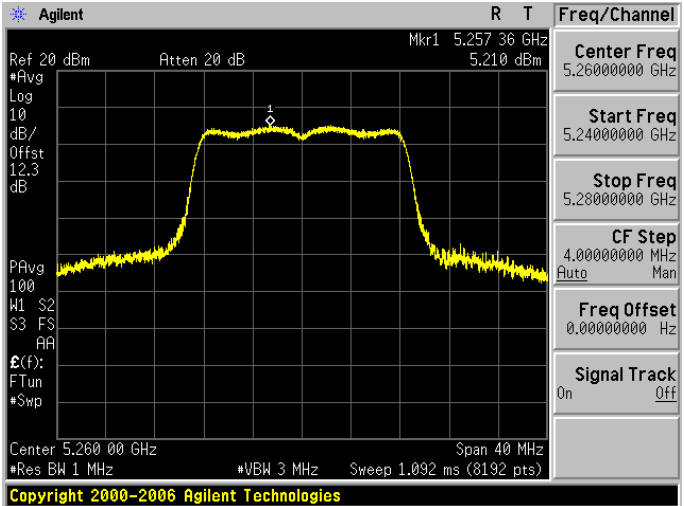
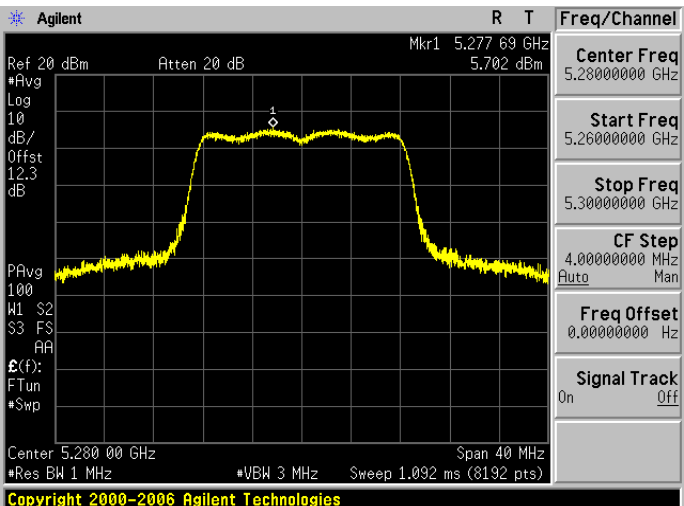
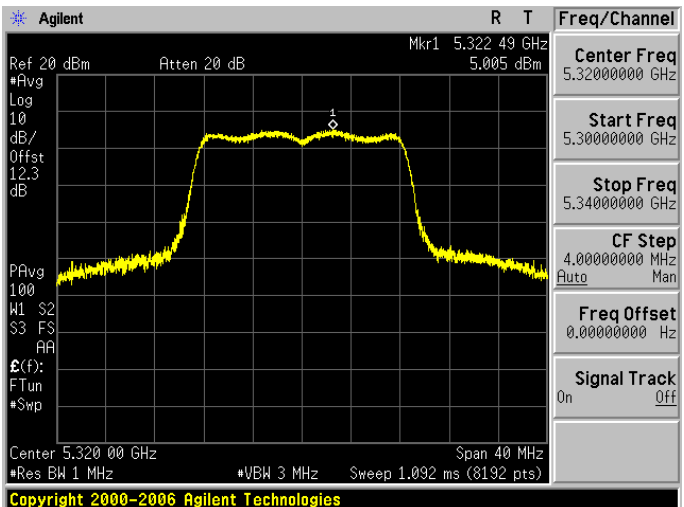


Mode 2: IEEE 802.11a Link Mode_ ANT-1	
5260 MHz	
5280 MHz	
5320 MHz	

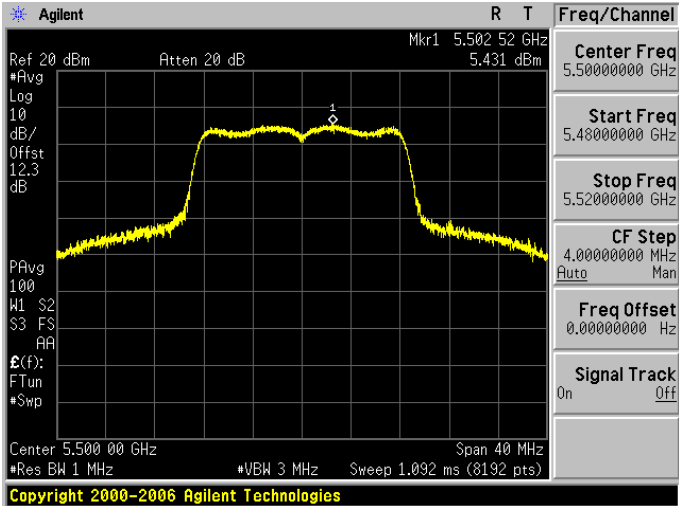
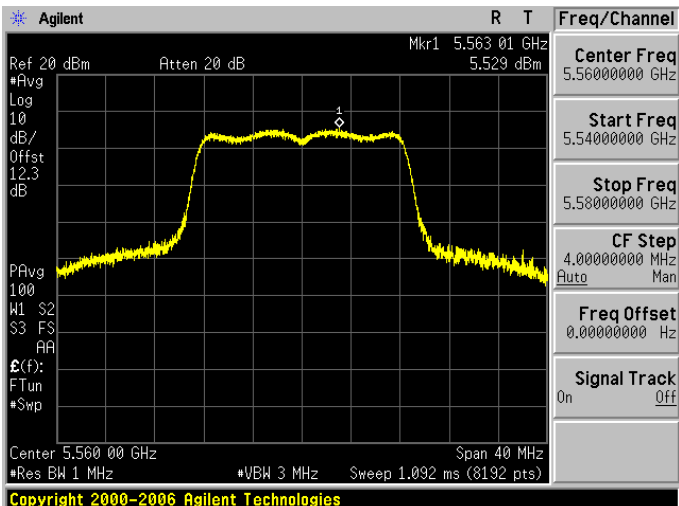
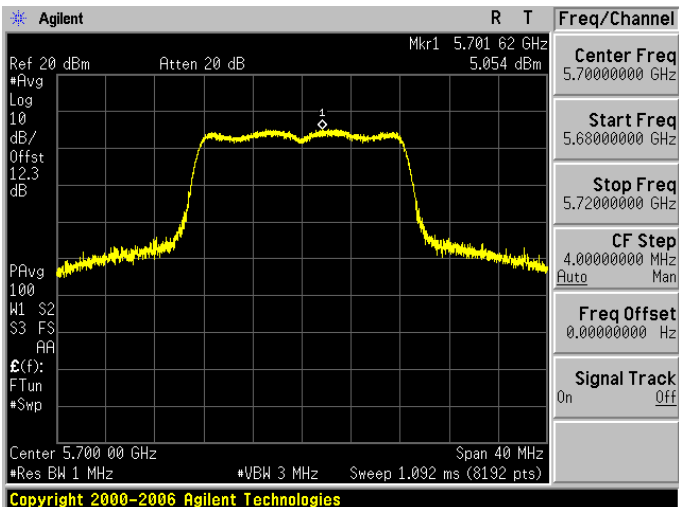


Mode 2: IEEE 802.11a Link Mode_ ANT-1	
5500 MHz	 Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 5.502 52 GHz #Avg Log 10 dB/ Offst 12.3 dB PAvg 100 W1 S2 S3 FS AA E(f): FTun #Swp Center 5.500 00 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 1.092 ms (8192 pts) Copyright 2000-2006 Agilent Technologies Center Freq 5.5000000 GHz Start Freq 5.4800000 GHz Stop Freq 5.5200000 GHz CF Step 4.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off
5560 MHz	 Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 5.563 01 GHz #Avg Log 10 dB/ Offst 12.3 dB PAvg 100 W1 S2 S3 FS AA E(f): FTun #Swp Center 5.560 00 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 1.092 ms (8192 pts) Copyright 2000-2006 Agilent Technologies Center Freq 5.5600000 GHz Start Freq 5.5400000 GHz Stop Freq 5.5800000 GHz CF Step 4.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off
5700 MHz	 Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 5.701 62 GHz #Avg Log 10 dB/ Offst 12.3 dB PAvg 100 W1 S2 S3 FS AA E(f): FTun #Swp Center 5.700 00 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 1.092 ms (8192 pts) Copyright 2000-2006 Agilent Technologies Center Freq 5.7000000 GHz Start Freq 5.6800000 GHz Stop Freq 5.7200000 GHz CF Step 4.0000000 MHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off

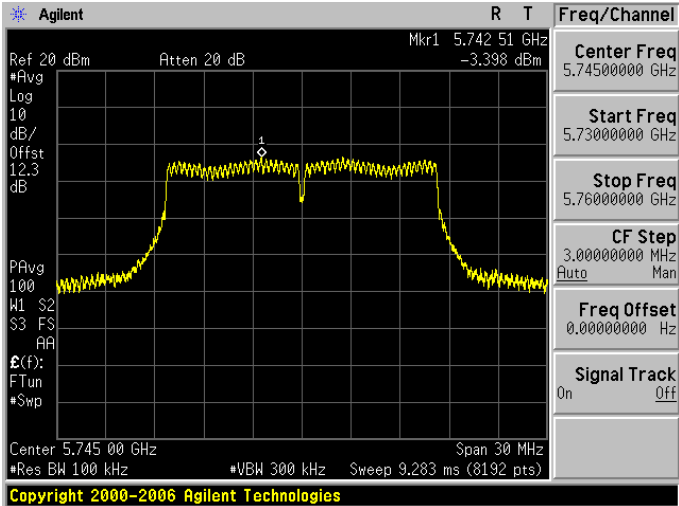
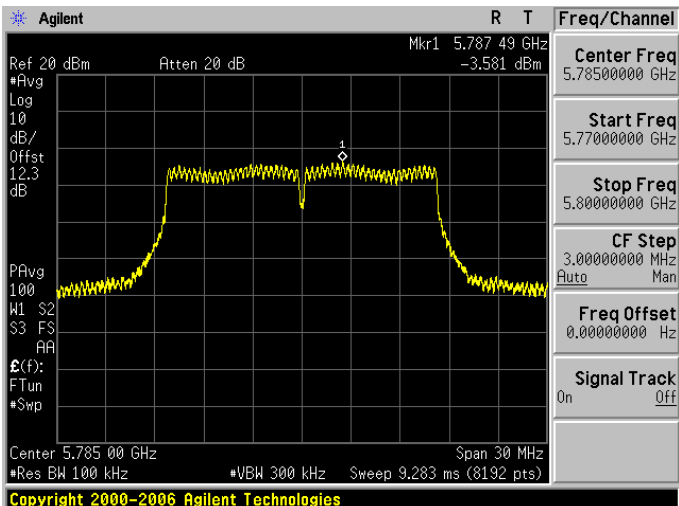
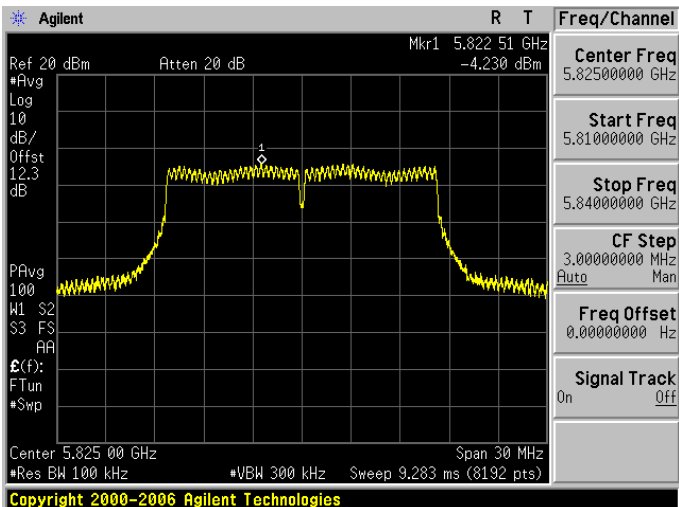


Mode 2: IEEE 802.11a Link Mode_ ANT-1	
5745 MHz	
5785 MHz	
5825 MHz	

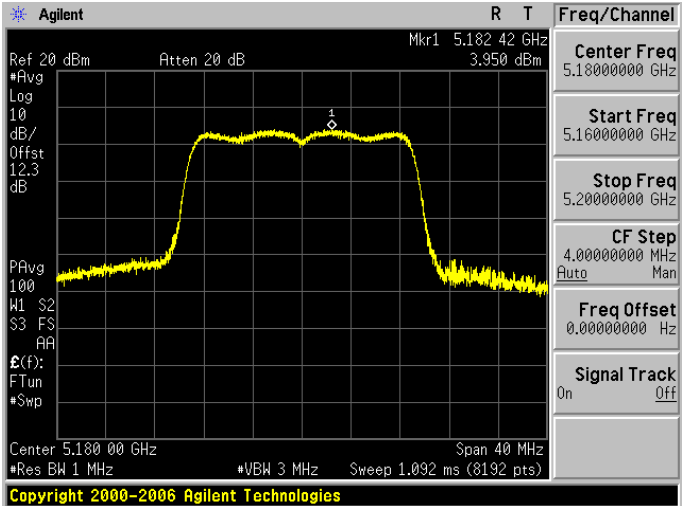
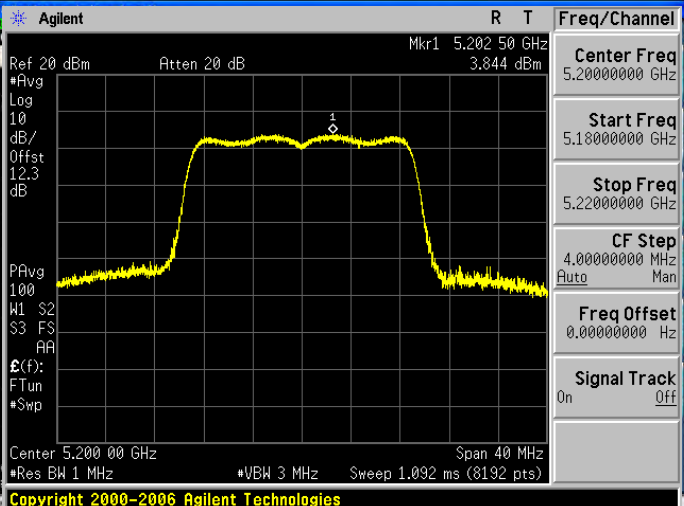
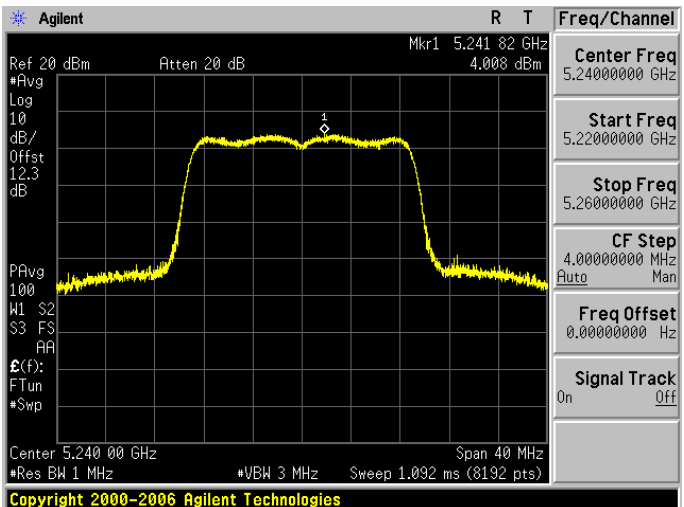


Mode 3: IEEE 802.11ac 20MHz Link Mode _ ANT-1	
5180 MHz	 Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 5.182 42 GHz #Avg Log 10 dB/ Offst 12.3 dB PAvg 100 W1 S2 S3 FS AA E(f): FTun #Swp Center 5.180 00 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 1.092 ms (8192 pts) Copyright 2000-2006 Agilent Technologies Freq/Channel Center Freq 5.18000000 GHz Start Freq 5.16000000 GHz Stop Freq 5.20000000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
5200 MHz	 Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 5.202 50 GHz #Avg Log 10 dB/ Offst 12.3 dB PAvg 100 W1 S2 S3 FS AA E(f): FTun #Swp Center 5.200 00 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 1.092 ms (8192 pts) Copyright 2000-2006 Agilent Technologies Freq/Channel Center Freq 5.20000000 GHz Start Freq 5.18000000 GHz Stop Freq 5.22000000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
5240 MHz	 Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 5.241 82 GHz #Avg Log 10 dB/ Offst 12.3 dB PAvg 100 W1 S2 S3 FS AA E(f): FTun #Swp Center 5.240 00 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 1.092 ms (8192 pts) Copyright 2000-2006 Agilent Technologies Freq/Channel Center Freq 5.24000000 GHz Start Freq 5.22000000 GHz Stop Freq 5.26000000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off

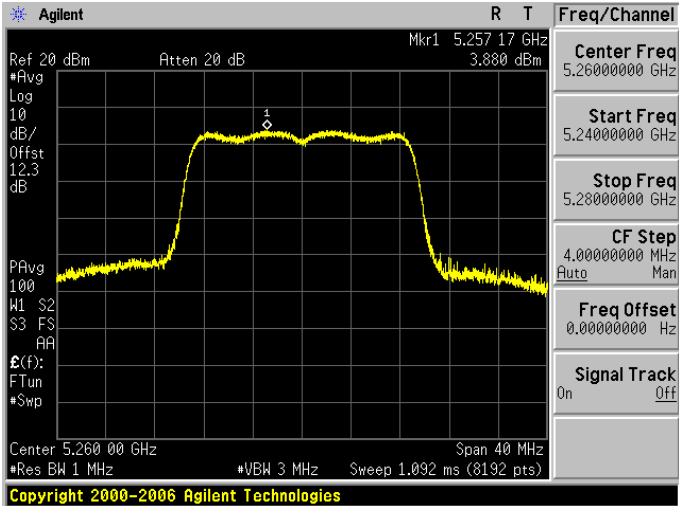
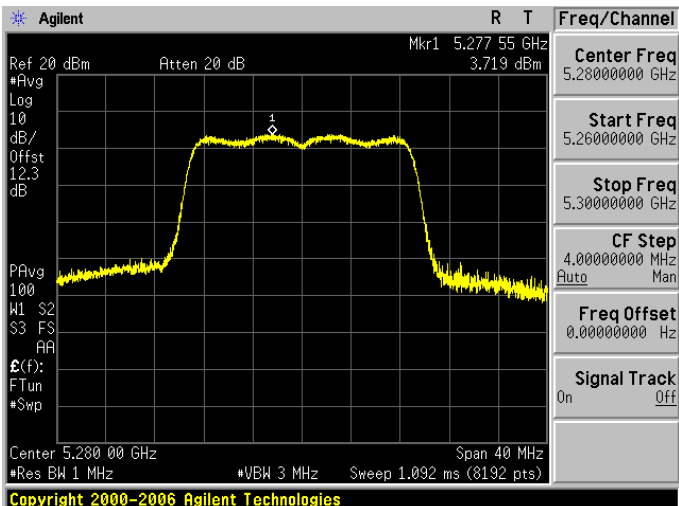
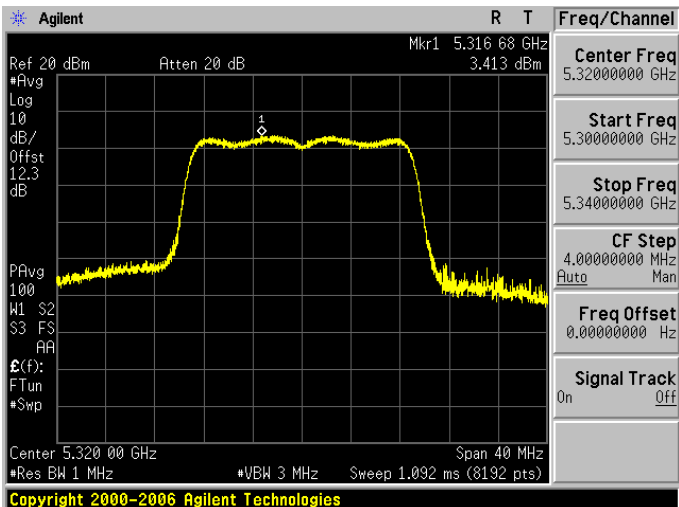



Mode 3: IEEE 802.11ac 20MHz Link Mode _ ANT-1	
5260 MHz	
5280 MHz	
5320 MHz	

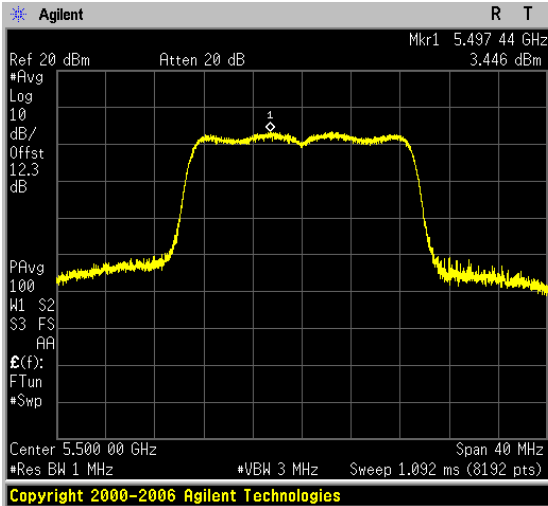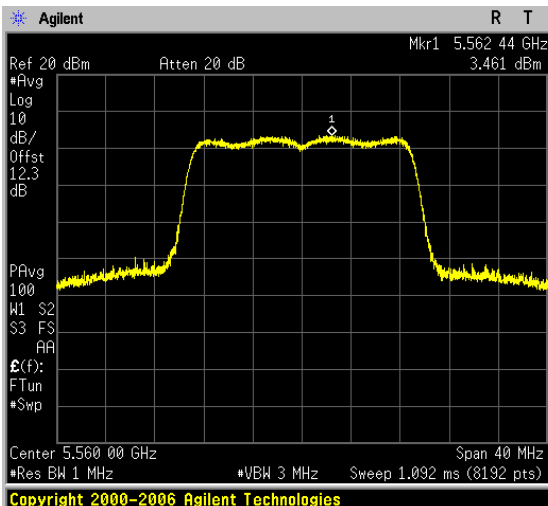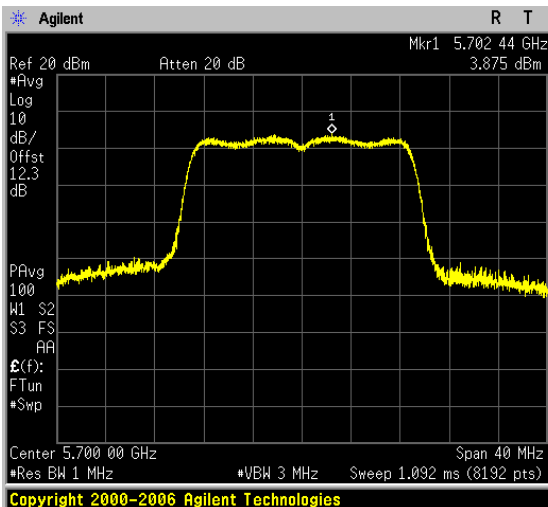


Mode 3: IEEE 802.11ac 20MHz Link Mode _ ANT-1															
5500 MHz	<table><thead><tr><th colspan="2">Freq/Channel</th></tr></thead><tbody><tr><td>Center Freq</td><td>5.5000000 GHz</td></tr><tr><td>Start Freq</td><td>5.4800000 GHz</td></tr><tr><td>Stop Freq</td><td>5.5200000 GHz</td></tr><tr><td>CF Step</td><td>4.0000000 MHz</td></tr><tr><td>Freq Offset</td><td>0.0000000 Hz</td></tr><tr><td>Signal Track</td><td>On</td></tr></tbody></table>	Freq/Channel		Center Freq	5.5000000 GHz	Start Freq	5.4800000 GHz	Stop Freq	5.5200000 GHz	CF Step	4.0000000 MHz	Freq Offset	0.0000000 Hz	Signal Track	On
Freq/Channel															
Center Freq	5.5000000 GHz														
Start Freq	5.4800000 GHz														
Stop Freq	5.5200000 GHz														
CF Step	4.0000000 MHz														
Freq Offset	0.0000000 Hz														
Signal Track	On														
5560 MHz	<table><thead><tr><th colspan="2">Freq/Channel</th></tr></thead><tbody><tr><td>Center Freq</td><td>5.5600000 GHz</td></tr><tr><td>Start Freq</td><td>5.5400000 GHz</td></tr><tr><td>Stop Freq</td><td>5.5800000 GHz</td></tr><tr><td>CF Step</td><td>4.0000000 MHz</td></tr><tr><td>Freq Offset</td><td>0.0000000 Hz</td></tr><tr><td>Signal Track</td><td>On</td></tr></tbody></table>	Freq/Channel		Center Freq	5.5600000 GHz	Start Freq	5.5400000 GHz	Stop Freq	5.5800000 GHz	CF Step	4.0000000 MHz	Freq Offset	0.0000000 Hz	Signal Track	On
Freq/Channel															
Center Freq	5.5600000 GHz														
Start Freq	5.5400000 GHz														
Stop Freq	5.5800000 GHz														
CF Step	4.0000000 MHz														
Freq Offset	0.0000000 Hz														
Signal Track	On														
5700 MHz	<table><thead><tr><th colspan="2">Freq/Channel</th></tr></thead><tbody><tr><td>Center Freq</td><td>5.7000000 GHz</td></tr><tr><td>Start Freq</td><td>5.6800000 GHz</td></tr><tr><td>Stop Freq</td><td>5.7200000 GHz</td></tr><tr><td>CF Step</td><td>4.0000000 MHz</td></tr><tr><td>Freq Offset</td><td>0.0000000 Hz</td></tr><tr><td>Signal Track</td><td>On</td></tr></tbody></table>	Freq/Channel		Center Freq	5.7000000 GHz	Start Freq	5.6800000 GHz	Stop Freq	5.7200000 GHz	CF Step	4.0000000 MHz	Freq Offset	0.0000000 Hz	Signal Track	On
Freq/Channel															
Center Freq	5.7000000 GHz														
Start Freq	5.6800000 GHz														
Stop Freq	5.7200000 GHz														
CF Step	4.0000000 MHz														
Freq Offset	0.0000000 Hz														
Signal Track	On														

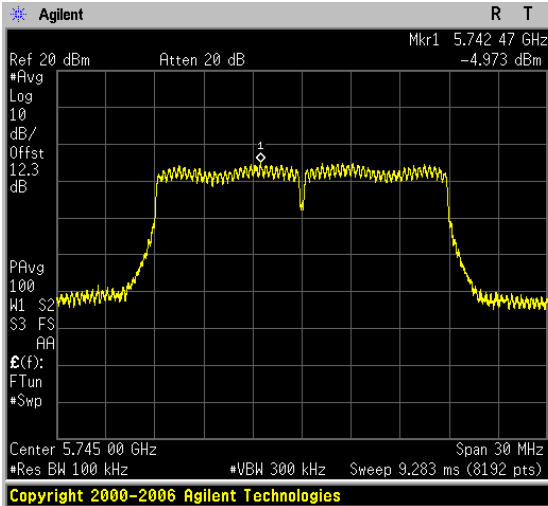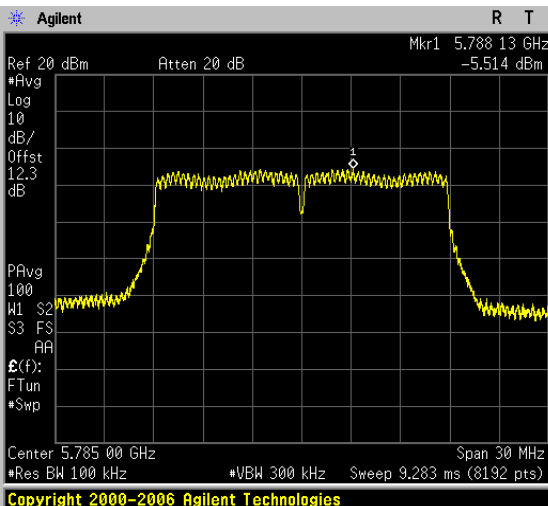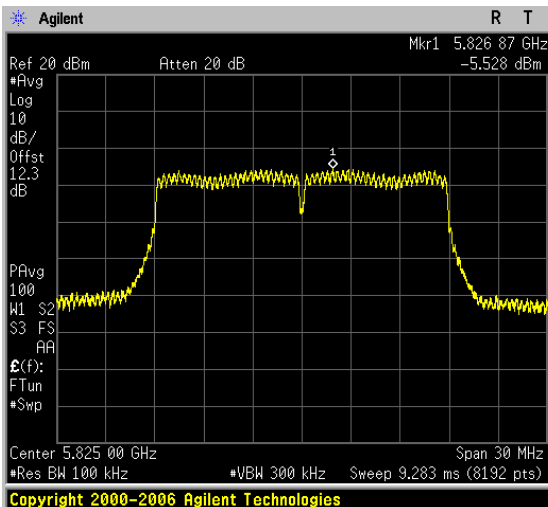


Mode 3: IEEE 802.11ac 20MHz Link Mode _ ANT-1	
5745 MHz	 Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 5.742 47 GHz #Avg Log 10 dB/ Offst 12.3 dB PAvg 100 W1 S2 S3 FS AA E(f): FTun #Swp Center 5.745 00 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 9.283 ms (8192 pts) Copyright 2000-2006 Agilent Technologies Freq/Channel Center Freq 5.74500000 GHz Start Freq 5.73000000 GHz Stop Freq 5.76000000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
5785 MHz	 Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 5.788 13 GHz #Avg Log 10 dB/ Offst 12.3 dB PAvg 100 W1 S2 S3 FS AA E(f): FTun #Swp Center 5.785 00 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 9.283 ms (8192 pts) Copyright 2000-2006 Agilent Technologies Freq/Channel Center Freq 5.78500000 GHz Start Freq 5.77000000 GHz Stop Freq 5.80000000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
5825 MHz	 Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 5.826 87 GHz #Avg Log 10 dB/ Offst 12.3 dB PAvg 100 W1 S2 S3 FS AA E(f): FTun #Swp Center 5.825 00 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 9.283 ms (8192 pts) Copyright 2000-2006 Agilent Technologies Freq/Channel Center Freq 5.82500000 GHz Start Freq 5.81000000 GHz Stop Freq 5.84000000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off

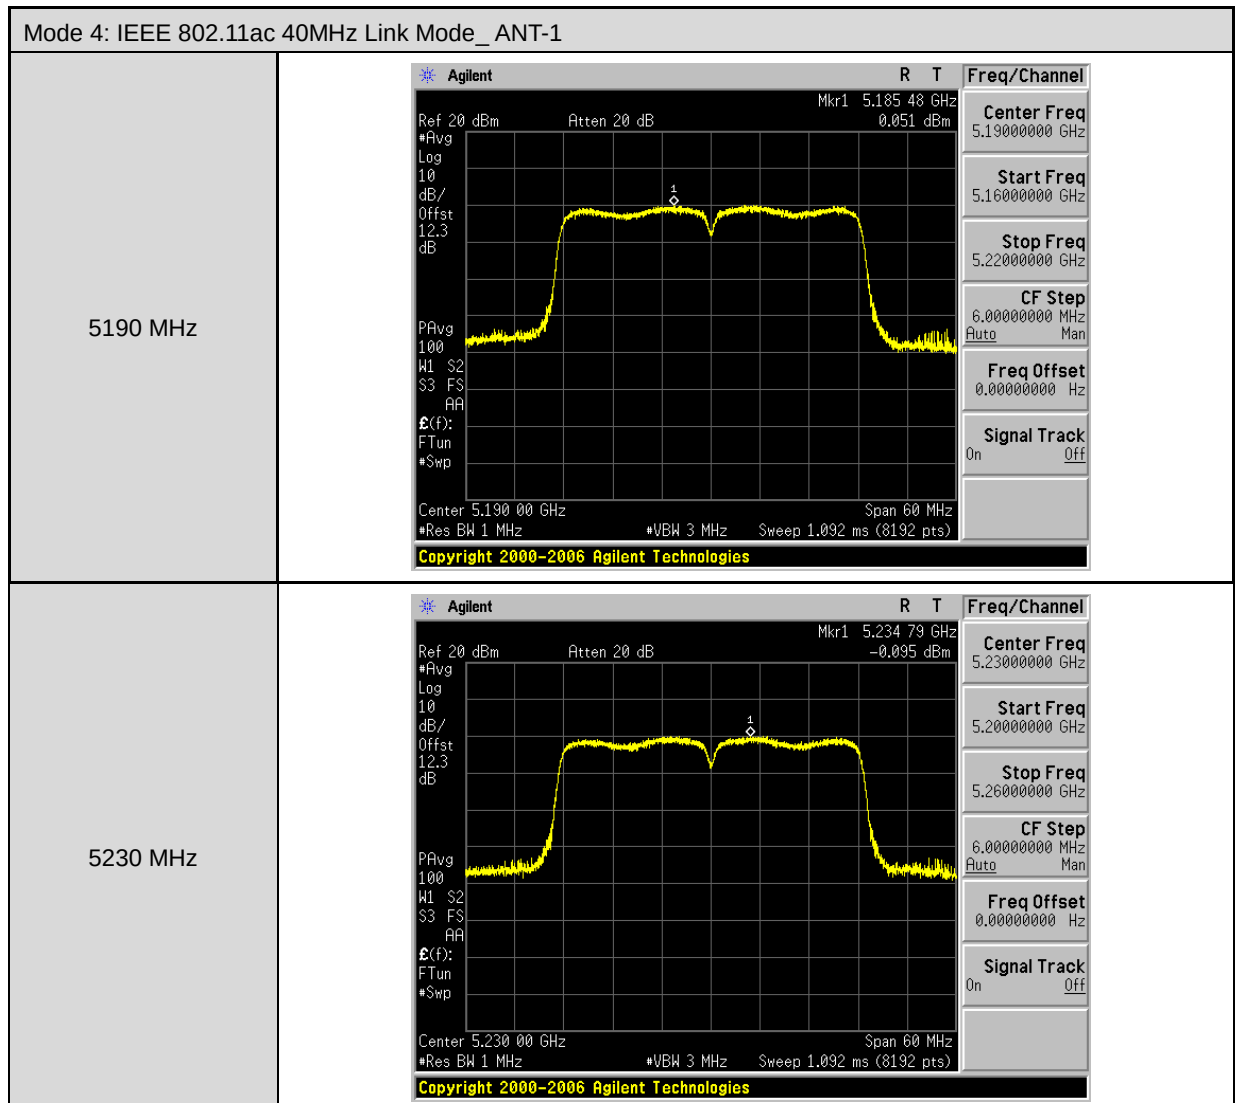



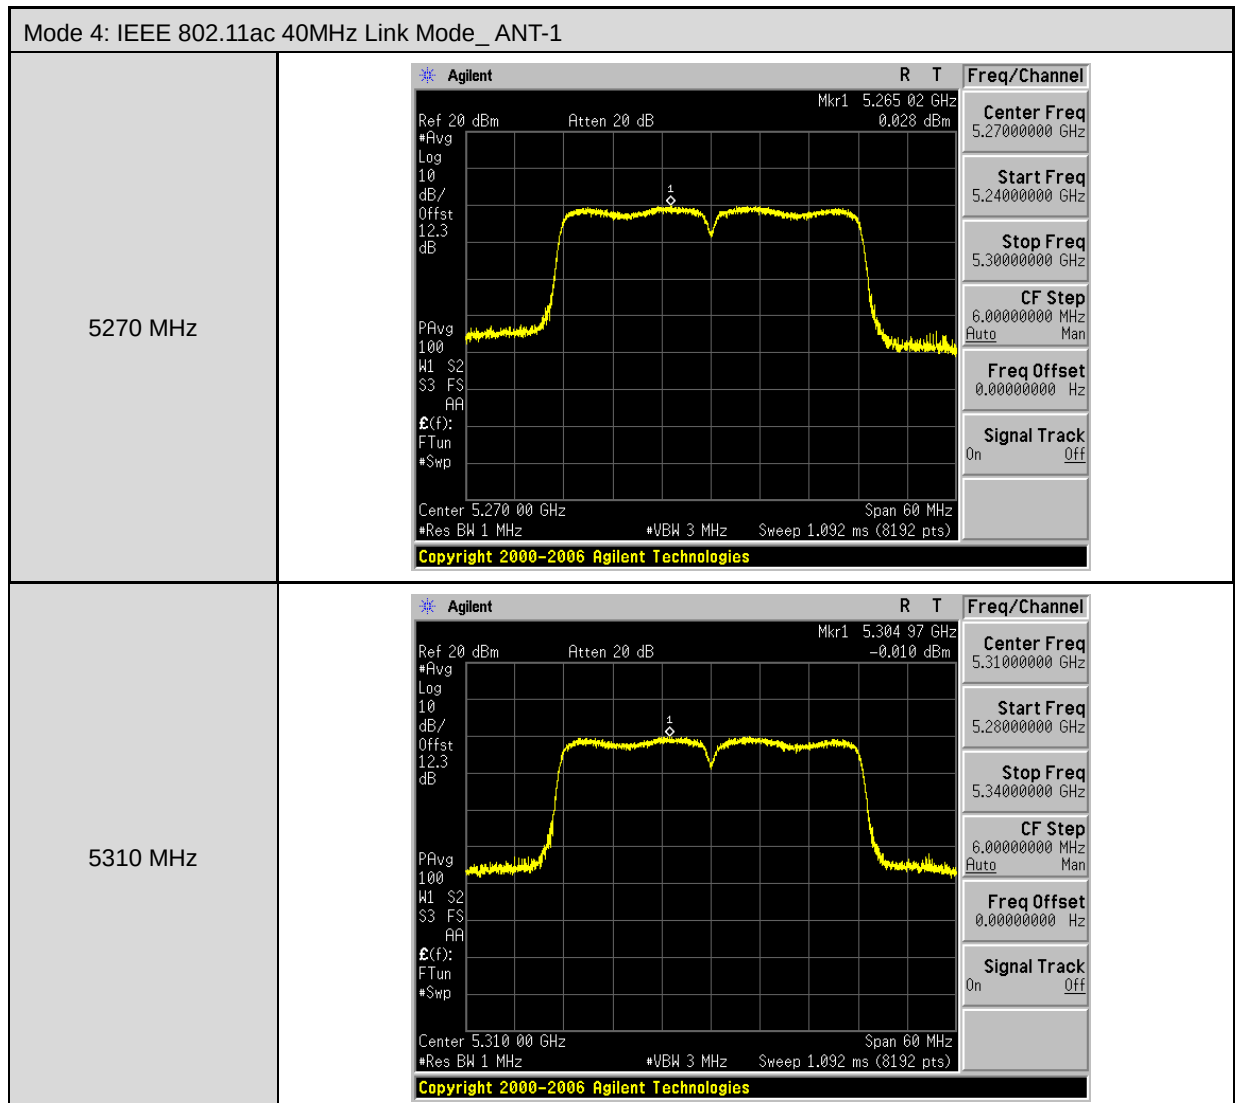





Mode 4: IEEE 802.11ac 40MHz Link Mode_ ANT-1	
5510 MHz	Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 5.504 58 GHz -0.212 dBm #Avg Log 10 dB/ Offst 12.3 dB PAvg 100 W1 S2 S3 FS AA E(f): FTun Swp Center 5.510 00 GHz Span 60 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 1.092 ms (8192 pts) Copyright 2000-2006 Agilent Technologies Freq/Channel Center Freq 5.51000000 GHz Start Freq 5.48000000 GHz Stop Freq 5.54000000 GHz CF Step 6.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
5550 MHz	Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 5.564 91 GHz -0.220 dBm #Avg Log 10 dB/ Offst 12.3 dB PAvg 100 W1 S2 S3 FS AA E(f): FTun Swp Center 5.550 00 GHz Span 60 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 1.092 ms (8192 pts) Copyright 2000-2006 Agilent Technologies Freq/Channel Center Freq 5.55000000 GHz Start Freq 5.52000000 GHz Stop Freq 5.58000000 GHz CF Step 6.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
5670 MHz	Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 5.664 68 GHz -0.291 dBm #Avg Log 10 dB/ Offst 12.3 dB PAvg 100 W1 S2 S3 FS AA E(f): FTun Swp Center 5.670 00 GHz Span 60 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 1.092 ms (8192 pts) Copyright 2000-2006 Agilent Technologies Freq/Channel Center Freq 5.67000000 GHz Start Freq 5.64000000 GHz Stop Freq 5.70000000 GHz CF Step 6.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off

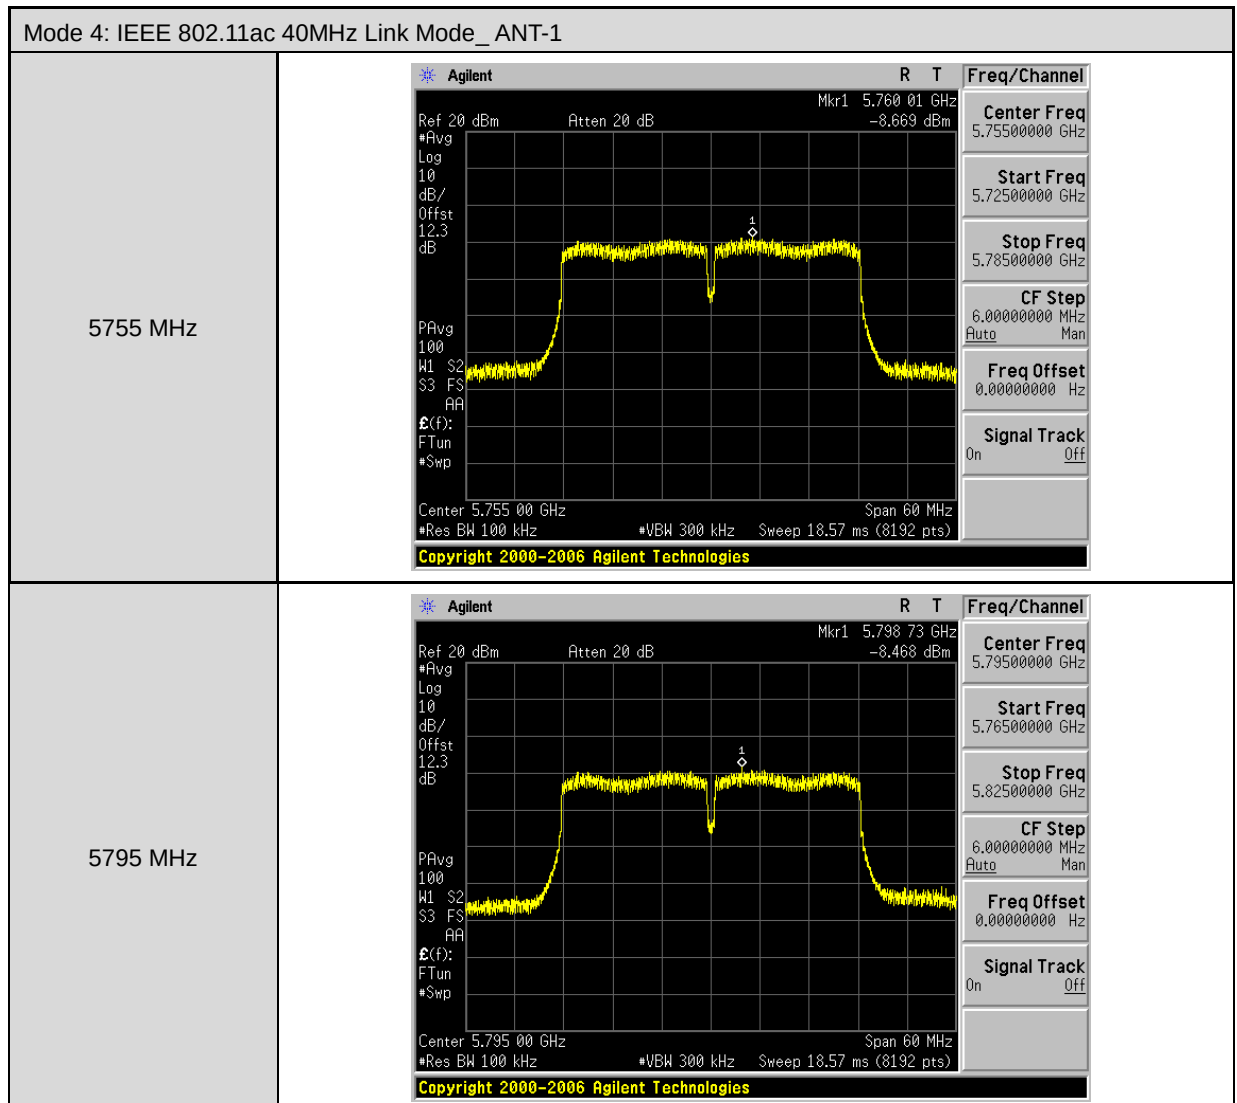

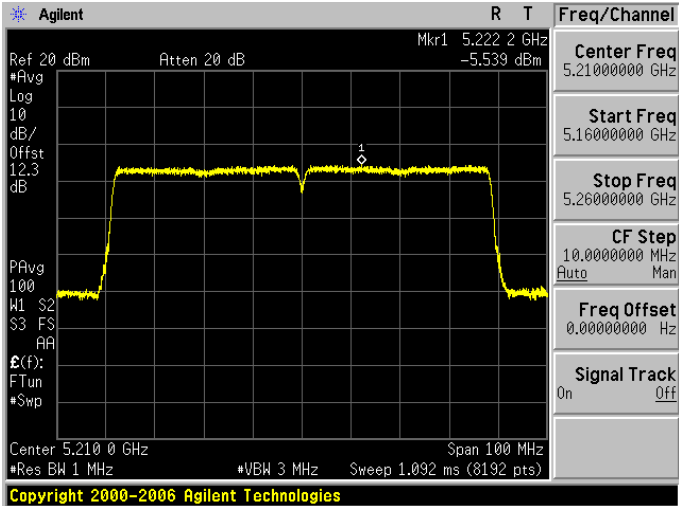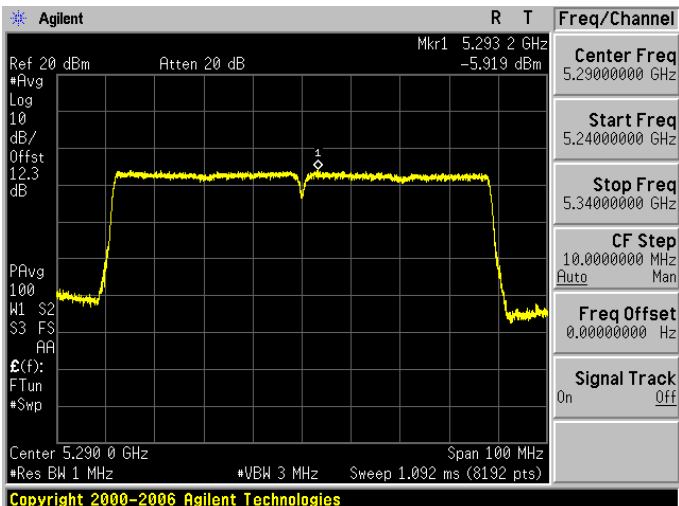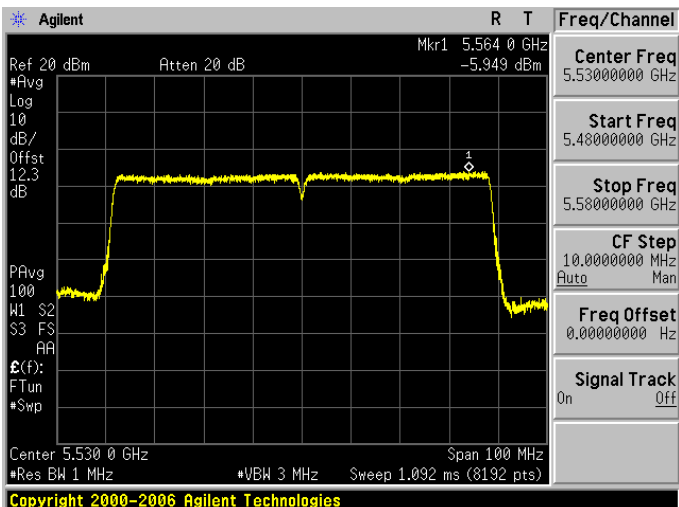

Mode 5: IEEE 802.11ac 80MHz Link Mode _ ANT-1	
5210 MHz	 Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 5.222 2 GHz #Avg Log 10 dB/ Offst 12.3 dB PAvg 100 W1 S2 S3 FS AA E(f): FTun #Swp Center 5.210 0 GHz Span 100 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 1.092 ms (8192 pts) Copyright 2000-2006 Agilent Technologies Center Freq 5.21000000 GHz Start Freq 5.16000000 GHz Stop Freq 5.26000000 GHz CF Step 10.0000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
5290 MHz	 Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 5.293 2 GHz #Avg Log 10 dB/ Offst 12.3 dB PAvg 100 W1 S2 S3 FS AA E(f): FTun #Swp Center 5.290 0 GHz Span 100 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 1.092 ms (8192 pts) Copyright 2000-2006 Agilent Technologies Center Freq 5.29000000 GHz Start Freq 5.24000000 GHz Stop Freq 5.34000000 GHz CF Step 10.0000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
5530 MHz	 Agilent R T Freq/Channel Ref 20 dBm Atten 20 dB Mkr1 5.564 0 GHz #Avg Log 10 dB/ Offst 12.3 dB PAvg 100 W1 S2 S3 FS AA E(f): FTun #Swp Center 5.530 0 GHz Span 100 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 1.092 ms (8192 pts) Copyright 2000-2006 Agilent Technologies Center Freq 5.53000000 GHz Start Freq 5.48000000 GHz Stop Freq 5.58000000 GHz CF Step 10.0000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off

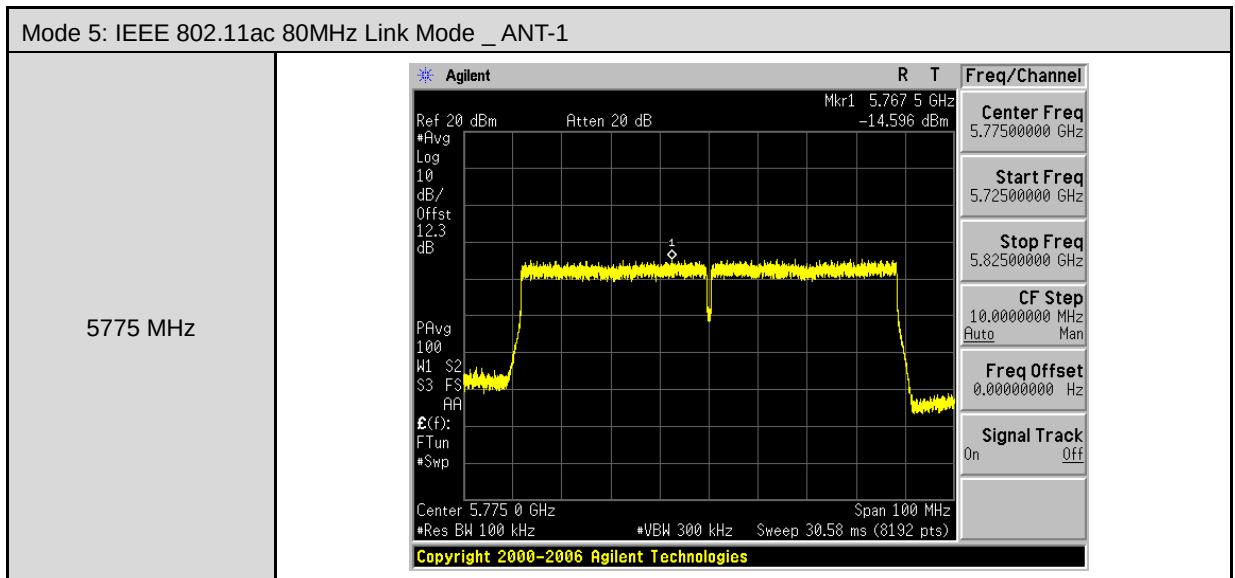


4.8. Frequency Stability Measurement

■ Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

■ Test Setup

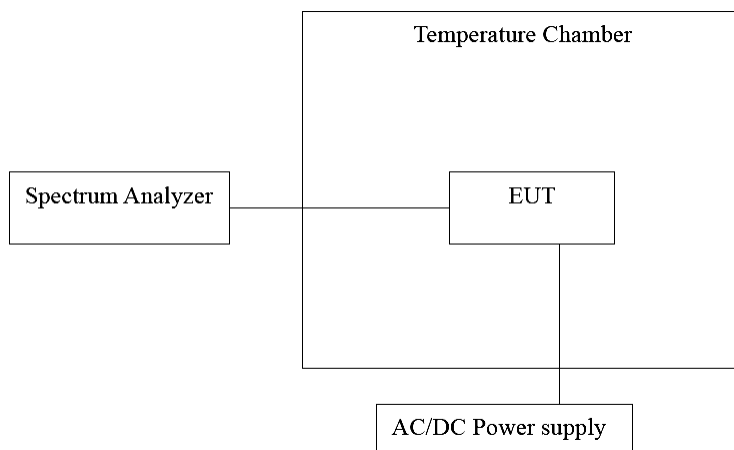

■ Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4408B	MY45107753	08/08/2016	1 year
Temperature & Humidity Chamber	TAICHY	MHU-225LA	980729	04/18/2016	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

■ Test Procedure

1. The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.



■ Test Result

Temperature Variations

Frequency	Temp. (°C)	Voltage (Vac)	Measured Freq. (MHz)	Delta Freq. (Hz)	Tolerance (ppm)	Result (Pass/Fail)
5200 MHz	0	120	5200.0001	100	0.019	Pass
	10		5199.9930	-7000	-1.346	Pass
	20		5200.0061	6100	1.173	Pass
	30		5199.9978	-2200	-0.423	Pass
	40		5199.9944	-5600	-1.077	Pass
	50		5199.9904	-9600	-1.846	Pass
5280 MHz	0	120	5279.9904	-9600	-1.818	Pass
	10		5280.0082	8200	1.553	Pass
	20		5280.0096	9600	1.818	Pass
	30		5279.9997	-300	-0.057	Pass
	40		5280.0032	3200	0.606	Pass
	50		5280.0052	5200	0.985	Pass
5560 MHz	0	120	5559.9923	-7700	-1.385	Pass
	10		5559.9999	-100	-0.018	Pass
	20		5560.0062	6200	1.115	Pass
	30		5559.9977	-2300	-0.414	Pass
	40		5560.0053	5300	0.953	Pass
	50		5559.9967	-3300	-0.594	Pass
5785 MHz	0	120	5785.0044	4400	0.761	Pass
	10		5784.9916	-8400	-1.452	Pass
	20		5784.9981	-1900	-0.328	Pass
	30		5784.9942	-5800	-1.003	Pass
	40		5784.9928	-7200	-1.245	Pass
	50		5785.0020	2000	0.346	Pass

Note: The manufacturer's frequency stability specification is better than 20ppm.

**Voltage Variations**

Frequency	Temp. (°C)	Voltage (Vac)	Measured Freq. (MHz)	Delta Freq. (Hz)	Tolerance (ppm)	Result (Pass/Fail)
5200 MHz	20	138.00	5199.9913	-8700	-1.673	Pass
		120.00	5199.9925	-7500	-1.442	Pass
		102.00	5200.0029	2900	0.558	Pass
5280 MHz	20	138.00	5280.0092	9200	1.742	Pass
		120.00	5280.0053	5300	1.004	Pass
		102.00	5279.9982	-1800	-0.341	Pass
5560 MHz	20	138.00	5559.9975	-2500	-0.450	Pass
		120.00	5559.9997	-300	-0.054	Pass
		102.00	5559.9979	-2100	-0.378	Pass
5785 MHz	20	138.00	5785.0013	1300	0.225	Pass
		120.00	5784.9934	-6600	-1.141	Pass
		102.00	5785.0067	6700	1.158	Pass

Note: The manufacturer's frequency stability specification is better than 20ppm.



4.9. Antenna Requirement

■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.407 (a), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

■ Antenna Connector Construction

See section 2 – antenna information.