



802.11be-EHT20 Out-of-Band Emissions – Ant 1

Channel 01 (2412MHz)


Reference Level

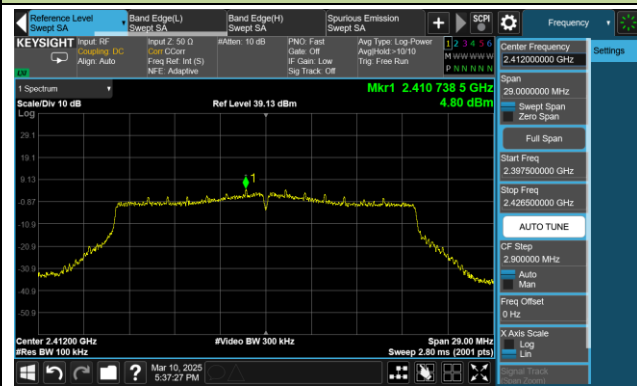

Low Band Edge

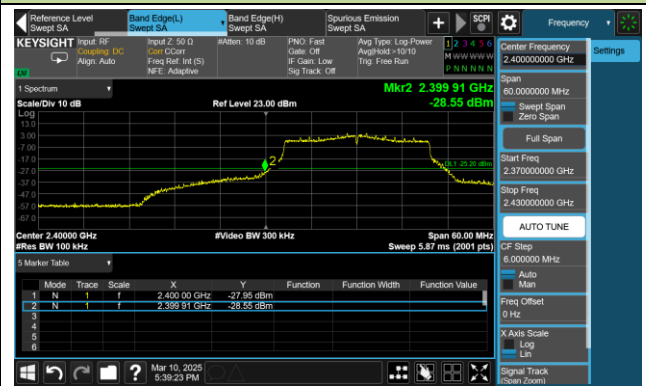


Spurious Emission

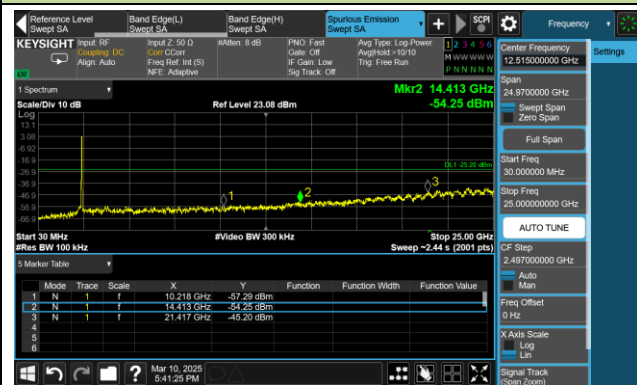


Channel 06 (2437MHz)

Reference Level

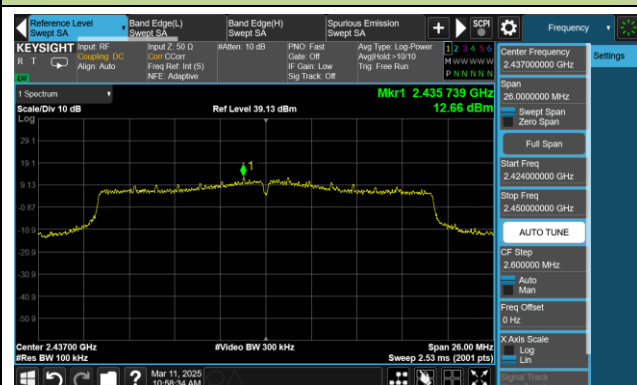

Spurious Emission

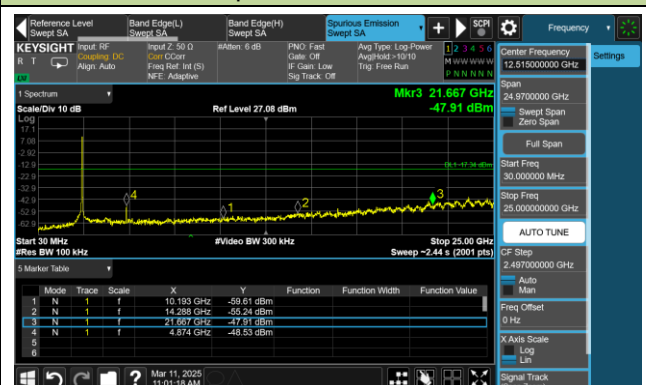


802.11 be-EHT20 Out-of-Band Emissions – Ant 1

Channel 11 (2462MHz)


Reference Level



High Band Edge

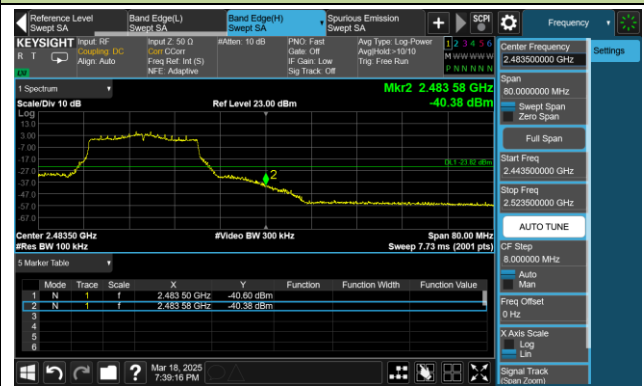


Spurious Emission

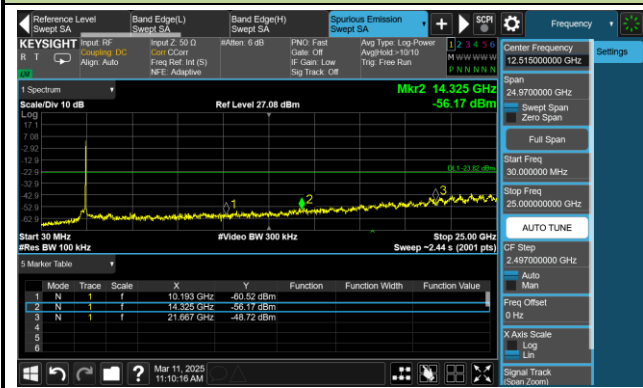


802.11 be-EHT40 Out-of-Band Emissions – Ant 1

Channel 03 (2422MHz)

Reference Level

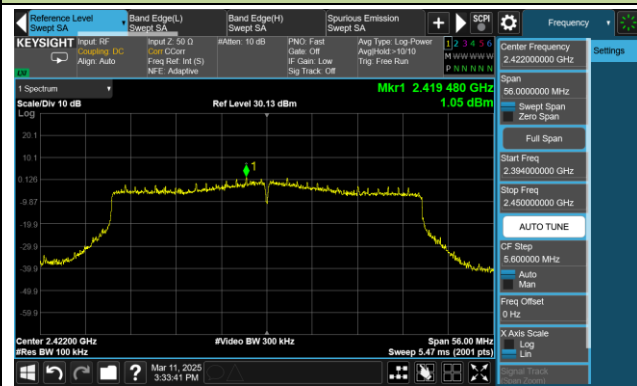

Low Band Edge

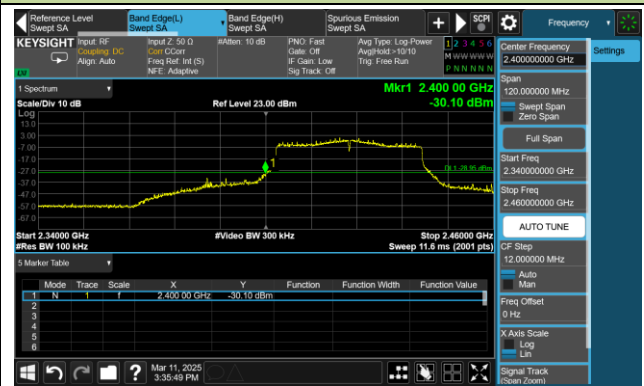


Spurious Emission



Channel 06 (2437MHz)

Reference Level

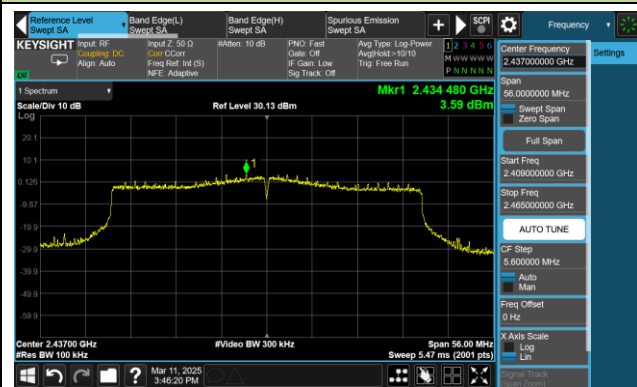


Spurious Emission



802.11 be-EHT40 Out-of-Band Emissions – Ant 1

Channel 09 (2452MHz)


Reference Level

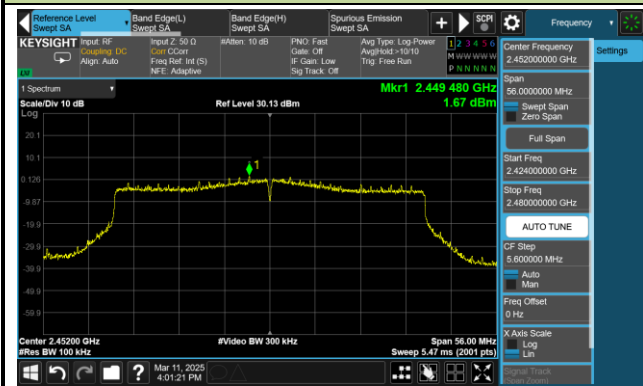

High Band Edge



Spurious Emission

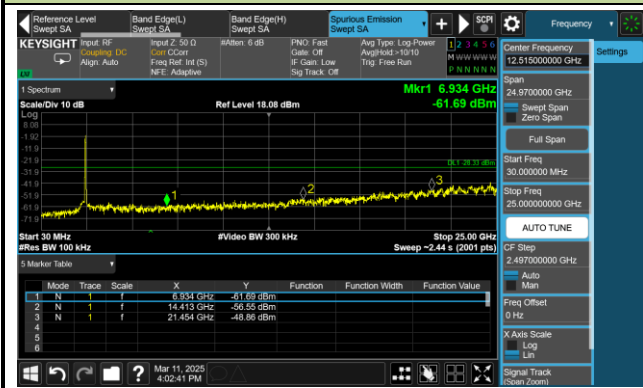

A.6 Radiated Spurious Emission Test Result

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-17	Test Mode	802.11b
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4090.60	40.79	-1.60	39.19	74.00	-34.81	Peak	Horizontal
	4825.00	47.08	0.04	47.12	74.00	-26.88	Peak	Horizontal
	11708.30	42.68	4.83	47.51	74.00	-26.49	Peak	Horizontal
	4070.20	41.16	-1.57	39.59	74.00	-34.41	Peak	Vertical
	4823.30	53.41	0.03	53.44	54.00	-0.56	Average	Vertical
	4823.30	54.67	0.03	54.70	74.00	-19.30	Peak	Vertical
	11720.20	42.55	4.78	47.33	74.00	-26.67	Peak	Vertical
06	4009.00	40.20	-1.24	38.96	74.00	-35.04	Peak	Horizontal
	4874.30	43.84	0.02	43.86	74.00	-30.14	Peak	Horizontal
	11211.90	42.76	5.27	48.03	74.00	-25.97	Peak	Horizontal
	3757.40	40.81	-1.63	39.18	74.00	-34.82	Peak	Vertical
	4874.30	53.35	0.02	53.37	54.00	-0.63	Average	Vertical
	4874.30	54.78	0.02	54.80	74.00	-19.20	Peak	Vertical
	11580.80	42.13	5.16	47.29	74.00	-26.71	Peak	Vertical
11	4046.40	41.59	-1.63	39.96	74.00	-34.04	Peak	Horizontal
	4923.60	46.61	0.01	46.62	74.00	-27.38	Peak	Horizontal
	12007.50	43.68	5.04	48.72	74.00	-25.28	Peak	Horizontal
	4133.10	41.32	-1.74	39.58	74.00	-34.42	Peak	Vertical
	4923.60	53.24	0.01	53.25	54.00	-0.75	Average	Vertical
	4923.60	53.44	0.01	53.45	74.00	-20.55	Peak	Vertical
	11676.00	43.58	4.84	48.42	74.00	-25.58	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-17	Test Mode	802.11g
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	3932.50	41.51	-1.45	40.06	74.00	-33.94	Peak	Horizontal
	5015.40	41.80	0.05	41.85	74.00	-32.15	Peak	Horizontal
	11458.40	41.86	5.29	47.15	74.00	-26.85	Peak	Horizontal
	4095.70	40.78	-1.66	39.12	74.00	-34.88	Peak	Vertical
	4825.00	47.49	0.04	47.53	74.00	-26.47	Peak	Vertical
	12180.90	42.91	5.05	47.96	74.00	-26.04	Peak	Vertical
06	4104.20	40.98	-1.74	39.24	74.00	-34.76	Peak	Horizontal
	4872.60	47.88	0.03	47.91	74.00	-26.09	Peak	Horizontal
	11098.00	42.52	5.12	47.64	74.00	-26.36	Peak	Horizontal
	3789.70	40.96	-1.51	39.45	74.00	-34.55	Peak	Vertical
	4870.90	44.87	0.04	44.91	54.00	-9.09	Average	Vertical
	4870.90	55.71	0.04	55.75	74.00	-18.25	Peak	Vertical
	11682.80	43.12	4.83	47.95	74.00	-26.05	Peak	Vertical
11	4102.50	41.01	-1.72	39.29	74.00	-34.71	Peak	Horizontal
	4972.90	41.50	0.13	41.63	74.00	-32.37	Peak	Horizontal
	12206.40	43.18	4.92	48.10	74.00	-25.90	Peak	Horizontal
	4000.50	41.52	-1.27	40.25	74.00	-33.75	Peak	Vertical
	4923.60	46.84	0.01	46.85	74.00	-27.15	Peak	Vertical
	11512.80	42.31	5.25	47.56	74.00	-26.44	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-17 ~ 2025-03-18	Test Mode	802.11n-HT20
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4000.50	40.62	-1.27	39.35	74.00	-34.65	Peak	Horizontal
	5003.50	41.07	0.10	41.17	74.00	-32.83	Peak	Horizontal
	11686.20	42.02	4.83	46.85	74.00	-27.15	Peak	Horizontal
	3769.30	41.00	-1.52	39.48	74.00	-34.52	Peak	Vertical
	4823.30	46.71	0.03	46.74	74.00	-27.26	Peak	Vertical
	11609.70	42.41	4.92	47.33	74.00	-26.67	Peak	Vertical
06	4876.00	46.99	0.01	47.00	74.00	-27.00	Peak	Horizontal
	7310.40	42.44	4.99	47.43	74.00	-26.57	Peak	Horizontal
	11470.30	41.63	5.40	47.03	74.00	-26.97	Peak	Horizontal
	4056.60	41.39	-1.68	39.71	74.00	-34.29	Peak	Vertical
	4876.00	46.02	0.01	46.03	74.00	-27.97	Peak	Vertical
	12184.30	43.40	5.03	48.43	74.00	-25.57	Peak	Vertical
11	3769.30	41.18	-1.52	39.66	74.00	-34.34	Peak	Horizontal
	4682.20	41.27	-0.29	40.98	74.00	-33.02	Peak	Horizontal
	11796.70	42.83	4.78	47.61	74.00	-26.39	Peak	Horizontal
	3823.70	40.86	-1.37	39.49	74.00	-34.51	Peak	Vertical
	4923.60	43.98	0.01	43.99	74.00	-30.01	Peak	Vertical
	11210.20	42.21	5.27	47.48	74.00	-26.52	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-18	Test Mode	802.11n-HT40
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	3850.90	41.13	-1.41	39.72	74.00	-34.28	Peak	Horizontal
	4848.80	40.29	0.01	40.30	74.00	-33.70	Peak	Horizontal
	11574.00	42.18	5.20	47.38	74.00	-26.62	Peak	Horizontal
	3840.70	40.88	-1.32	39.56	74.00	-34.44	Peak	Vertical
	4675.40	41.89	-0.35	41.54	74.00	-32.46	Peak	Vertical
	11592.70	42.44	5.08	47.52	74.00	-26.48	Peak	Vertical
06	4015.80	40.90	-1.39	39.51	74.00	-34.49	Peak	Horizontal
	4872.60	44.97	0.03	45.00	74.00	-29.00	Peak	Horizontal
	11880.00	42.09	4.97	47.06	74.00	-26.94	Peak	Horizontal
	3993.70	40.90	-1.37	39.53	74.00	-34.47	Peak	Vertical
	4872.60	40.93	0.03	40.96	54.00	-13.04	Average	Vertical
	4872.60	51.23	0.03	51.26	74.00	-22.74	Peak	Vertical
	11679.40	42.84	4.84	47.68	74.00	-26.32	Peak	Vertical
09	4136.50	41.01	-1.77	39.24	74.00	-34.76	Peak	Horizontal
	4723.00	41.06	-0.04	41.02	74.00	-32.98	Peak	Horizontal
	11914.00	43.30	4.90	48.20	74.00	-25.80	Peak	Horizontal
	3772.70	40.67	-1.51	39.16	74.00	-34.84	Peak	Vertical
	4896.40	42.76	0.05	42.81	74.00	-31.19	Peak	Vertical
	11363.20	41.99	5.49	47.48	74.00	-26.52	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-18	Test Mode	802.11ax-HE20
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4163.70	41.13	-1.69	39.44	74.00	-34.56	Peak	Horizontal
	5006.90	41.65	0.06	41.71	74.00	-32.29	Peak	Horizontal
	11806.90	42.63	4.79	47.42	74.00	-26.58	Peak	Horizontal
	4010.70	40.72	-1.27	39.45	74.00	-34.55	Peak	Vertical
	4825.00	44.63	0.04	44.67	74.00	-29.33	Peak	Vertical
	11856.20	42.57	4.91	47.48	74.00	-26.52	Peak	Vertical
06	4872.60	46.34	0.03	46.37	74.00	-27.63	Peak	Horizontal
	7308.70	43.73	4.99	48.72	74.00	-25.28	Peak	Horizontal
	11247.60	41.85	5.35	47.20	74.00	-26.80	Peak	Horizontal
	3992.00	41.47	-1.40	40.07	74.00	-33.93	Peak	Vertical
	4879.40	43.06	0.02	43.08	54.00	-10.92	Average	Vertical
	4879.40	52.39	0.02	52.41	74.00	-21.59	Peak	Vertical
	7308.70	41.97	4.99	46.96	74.00	-27.04	Peak	Vertical
11	3840.70	40.59	-1.32	39.27	74.00	-34.73	Peak	Horizontal
	5013.70	41.66	0.03	41.69	74.00	-32.31	Peak	Horizontal
	11364.90	42.11	5.49	47.60	74.00	-26.40	Peak	Horizontal
	4019.20	40.52	-1.46	39.06	74.00	-34.94	Peak	Vertical
	4925.30	43.33	0.00	43.33	74.00	-30.67	Peak	Vertical
	11404.00	42.49	5.55	48.04	74.00	-25.96	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-18	Test Mode	802.11ax-HE40
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	4107.60	41.20	-1.77	39.43	74.00	-34.57	Peak	Horizontal
	4672.00	41.25	-0.37	40.88	74.00	-33.12	Peak	Horizontal
	11429.50	42.75	5.35	48.10	74.00	-25.90	Peak	Horizontal
	3998.80	40.52	-1.29	39.23	74.00	-34.77	Peak	Vertical
	4852.20	41.42	0.04	41.46	74.00	-32.54	Peak	Vertical
	11364.90	41.66	5.49	47.15	74.00	-26.85	Peak	Vertical
06	3995.40	40.90	-1.34	39.56	74.00	-34.44	Peak	Horizontal
	4881.10	44.66	0.02	44.68	74.00	-29.32	Peak	Horizontal
	11398.90	41.65	5.52	47.17	74.00	-26.83	Peak	Horizontal
	4010.70	40.77	-1.27	39.50	74.00	-34.50	Peak	Vertical
	4869.20	49.36	0.06	49.42	74.00	-24.58	Peak	Vertical
	12107.80	43.28	5.07	48.35	74.00	-25.65	Peak	Vertical
09	3788.00	41.44	-1.50	39.94	74.00	-34.06	Peak	Horizontal
	4942.30	41.51	0.12	41.63	74.00	-32.37	Peak	Horizontal
	11353.00	42.87	5.51	48.38	74.00	-25.62	Peak	Horizontal
	4019.20	40.95	-1.46	39.49	74.00	-34.51	Peak	Vertical
	4916.80	41.36	0.04	41.40	74.00	-32.60	Peak	Vertical
	11397.20	42.01	5.51	47.52	74.00	-26.48	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-18	Test Mode	802.11be-EHT20
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	3941.00	40.09	-1.45	38.64	74.00	-35.36	Peak	Horizontal
	5005.20	40.77	0.08	40.85	74.00	-33.15	Peak	Horizontal
	11628.40	41.64	4.97	46.61	74.00	-27.39	Peak	Horizontal
	4085.50	41.52	-1.57	39.95	74.00	-34.05	Peak	Vertical
	4818.20	45.29	0.02	45.31	74.00	-28.69	Peak	Vertical
	11453.30	41.94	5.28	47.22	74.00	-26.78	Peak	Vertical
06	4872.60	46.63	0.03	46.66	74.00	-27.34	Peak	Horizontal
	7318.90	41.38	4.96	46.34	74.00	-27.66	Peak	Horizontal
	11822.20	42.15	4.90	47.05	74.00	-26.95	Peak	Horizontal
	3801.60	41.18	-1.59	39.59	74.00	-34.41	Peak	Vertical
	4874.30	43.32	0.02	43.34	54.00	-10.66	Average	Vertical
	4874.30	51.98	0.02	52.00	74.00	-22.00	Peak	Vertical
	11864.70	42.25	4.93	47.18	74.00	-26.82	Peak	Vertical
11	4012.40	40.51	-1.31	39.20	74.00	-34.80	Peak	Horizontal
	4683.90	42.30	-0.28	42.02	74.00	-31.98	Peak	Horizontal
	11859.60	42.45	4.92	47.37	74.00	-26.63	Peak	Horizontal
	4189.20	41.36	-1.89	39.47	74.00	-34.53	Peak	Vertical
	4918.50	43.35	0.03	43.38	74.00	-30.62	Peak	Vertical
	11347.90	42.39	5.50	47.89	74.00	-26.11	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-03-18	Test Mode	802.11be-EHT40
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	4003.90	39.87	-1.25	38.62	74.00	-35.38	Peak	Horizontal
	4680.50	41.70	-0.31	41.39	74.00	-32.61	Peak	Horizontal
	11570.60	41.59	5.17	46.76	74.00	-27.24	Peak	Horizontal
	4024.30	40.64	-1.50	39.14	74.00	-34.86	Peak	Vertical
	4842.00	42.28	-0.03	42.25	74.00	-31.75	Peak	Vertical
	11504.30	41.74	5.29	47.03	74.00	-26.97	Peak	Vertical
06	4095.70	41.86	-1.66	40.20	74.00	-33.80	Peak	Horizontal
	4680.50	42.44	-0.31	42.13	74.00	-31.87	Peak	Horizontal
	11468.60	41.80	5.38	47.18	74.00	-26.82	Peak	Horizontal
	4092.30	40.50	-1.62	38.88	74.00	-35.12	Peak	Vertical
	4869.20	44.63	0.06	44.69	74.00	-29.31	Peak	Vertical
	12051.70	43.34	5.20	48.54	74.00	-25.46	Peak	Vertical
09	3976.70	40.05	-1.42	38.63	74.00	-35.37	Peak	Horizontal
	4898.10	40.66	0.05	40.71	74.00	-33.29	Peak	Horizontal
	11461.80	41.62	5.32	46.94	74.00	-27.06	Peak	Horizontal
	4003.90	41.39	-1.25	40.14	74.00	-33.86	Peak	Vertical
	4700.90	41.29	-0.24	41.05	74.00	-32.95	Peak	Vertical
	11558.70	42.05	5.01	47.06	74.00	-26.94	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site	WJ-AC1	Test Date	2025-03-18
Temperature	20.1 °C	Humidity	36.5 %
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Carl Jiang
Factor	VULB 9163_07099_3m	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2437MHz		

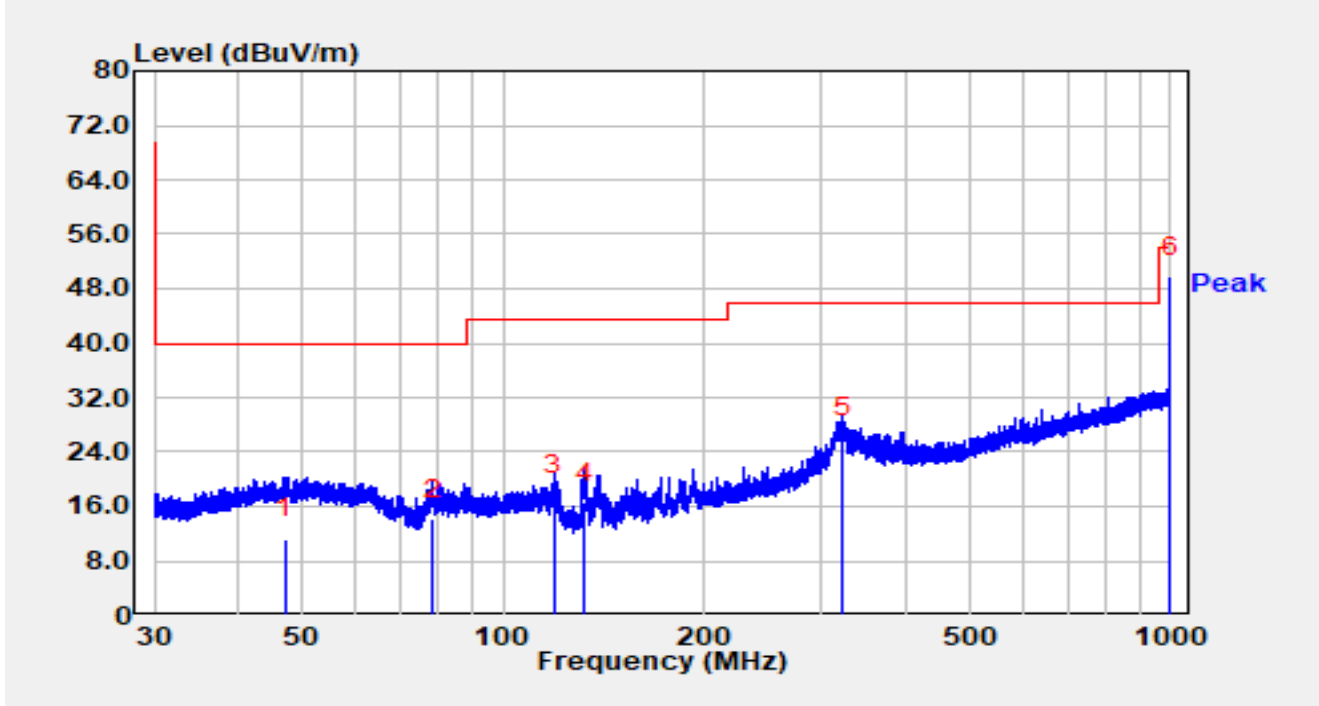


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		47.143	-8.40	19.66	11.26	-28.74	40.00	QP
2		78.276	0.60	13.58	14.18	-25.82	40.00	QP
3		119.311	1.50	16.09	17.59	-25.91	43.50	QP
4		132.128	2.10	14.38	16.48	-27.02	43.50	QP
5		322.302	4.80	21.20	26.00	-20.00	46.00	QP
6	*	1000.000	18.20	31.61	49.81	-4.20	54.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	WJ-AC1	Test Date	2025-03-18
Temperature	20.1 °C	Humidity	36.5 %
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Carl Jiang
Factor	VULB 9163_07099_3m	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2437MHz		

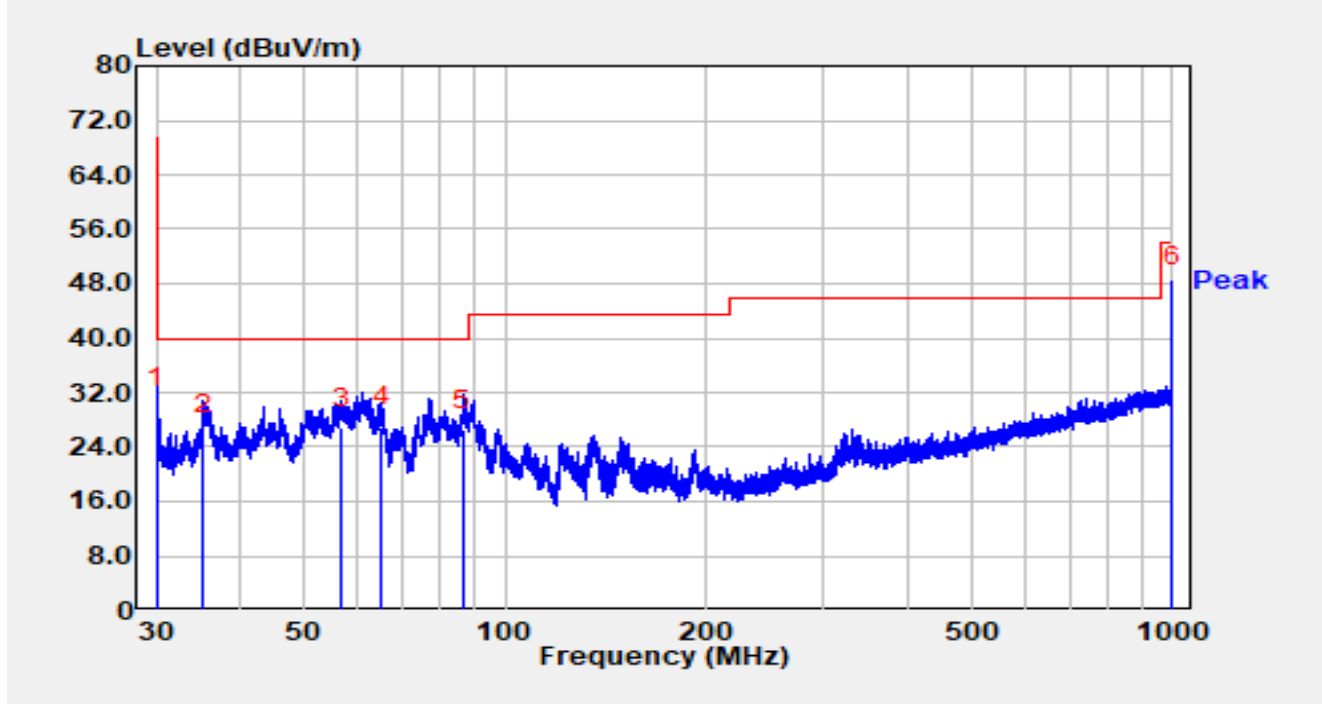


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		30.053	12.90	16.75	29.65	-10.35	40.00	QP
2		35.313	8.60	17.18	25.78	-14.22	40.00	QP
3		56.792	8.10	18.71	26.81	-13.19	40.00	QP
4		65.274	9.70	17.27	26.97	-13.03	40.00	QP
5		86.564	11.40	15.09	26.49	-13.51	40.00	QP
6	*	1000.000	15.90	31.61	47.51	-6.49	54.00	QP

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

A.7 Radiated Restricted Band Edge Test Result

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11b at 2412MHz		

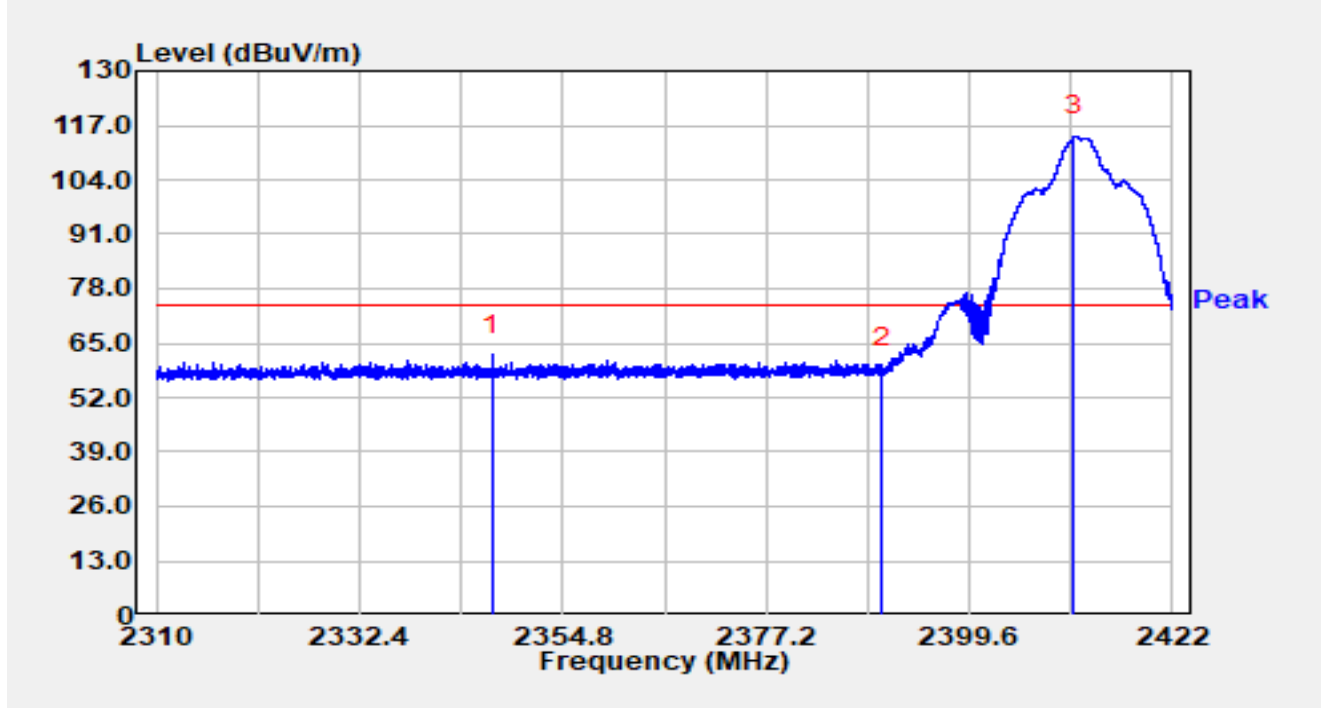


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2347.016	25.44	36.71	62.14	-11.86	74.00	Peak
2		2390.000	22.24	36.83	59.07	-14.93	74.00	Peak
3		2411.158	77.49	36.97	114.46	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11b at 2412MHz		

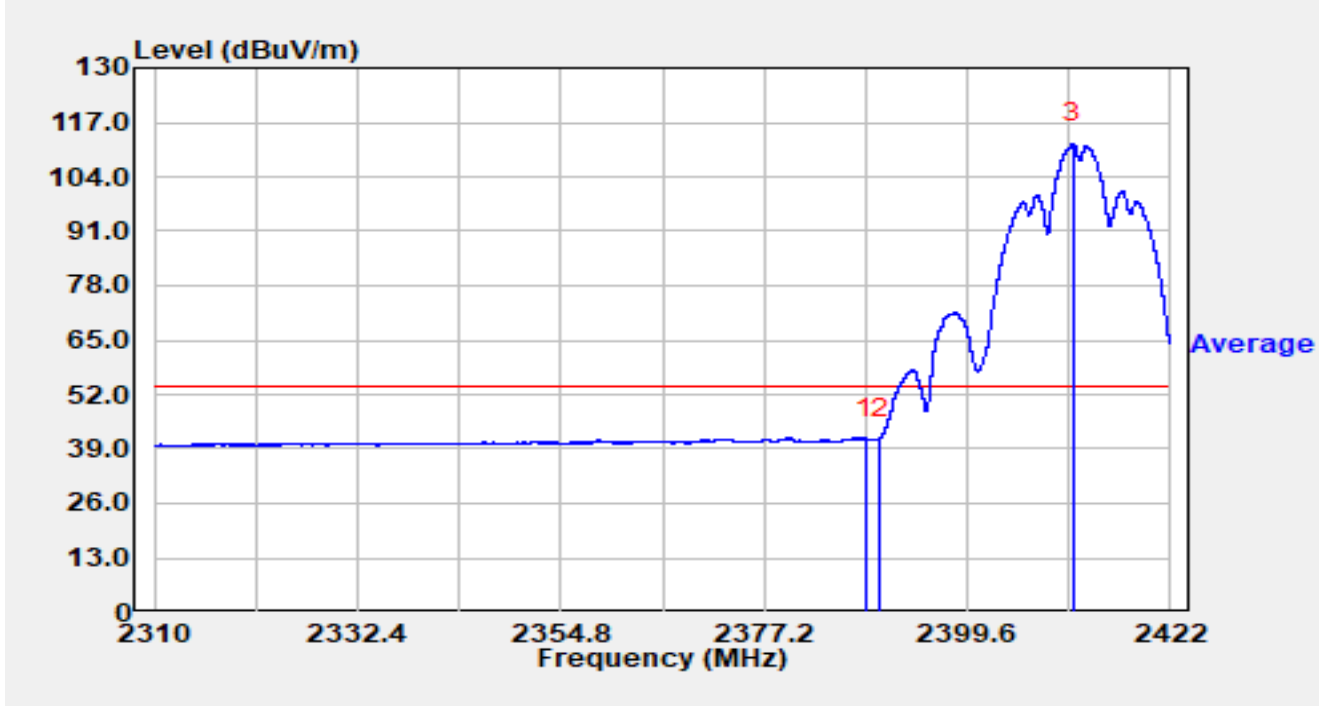


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.344	4.85	36.82	41.67	-12.33	54.00	Average
2		2390.000	4.72	36.83	41.55	-12.45	54.00	Average
3		2411.248	75.01	36.97	111.99	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11b at 2412MHz		

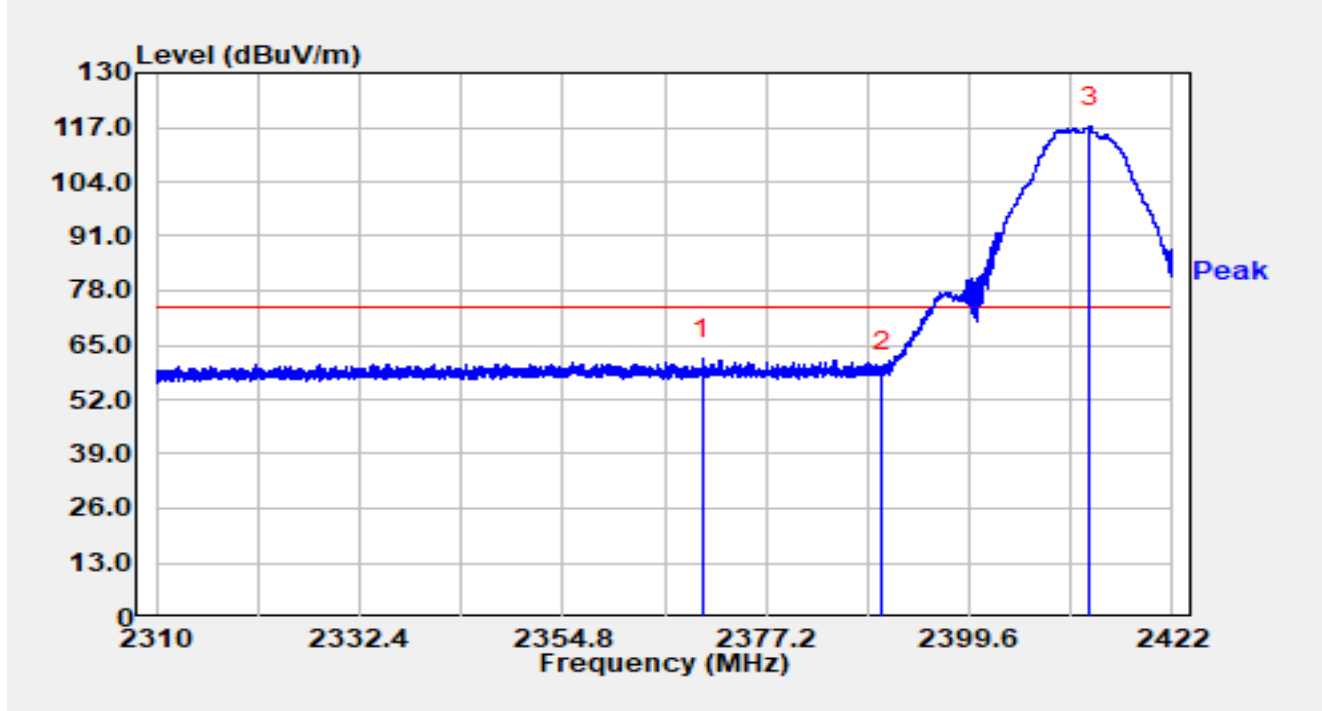


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2370.211	24.87	36.73	61.60	-12.40	74.00	Peak
2		2390.000	21.75	36.83	58.58	-15.42	74.00	Peak
3		2412.917	80.20	36.98	117.18	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11b at 2412MHz		

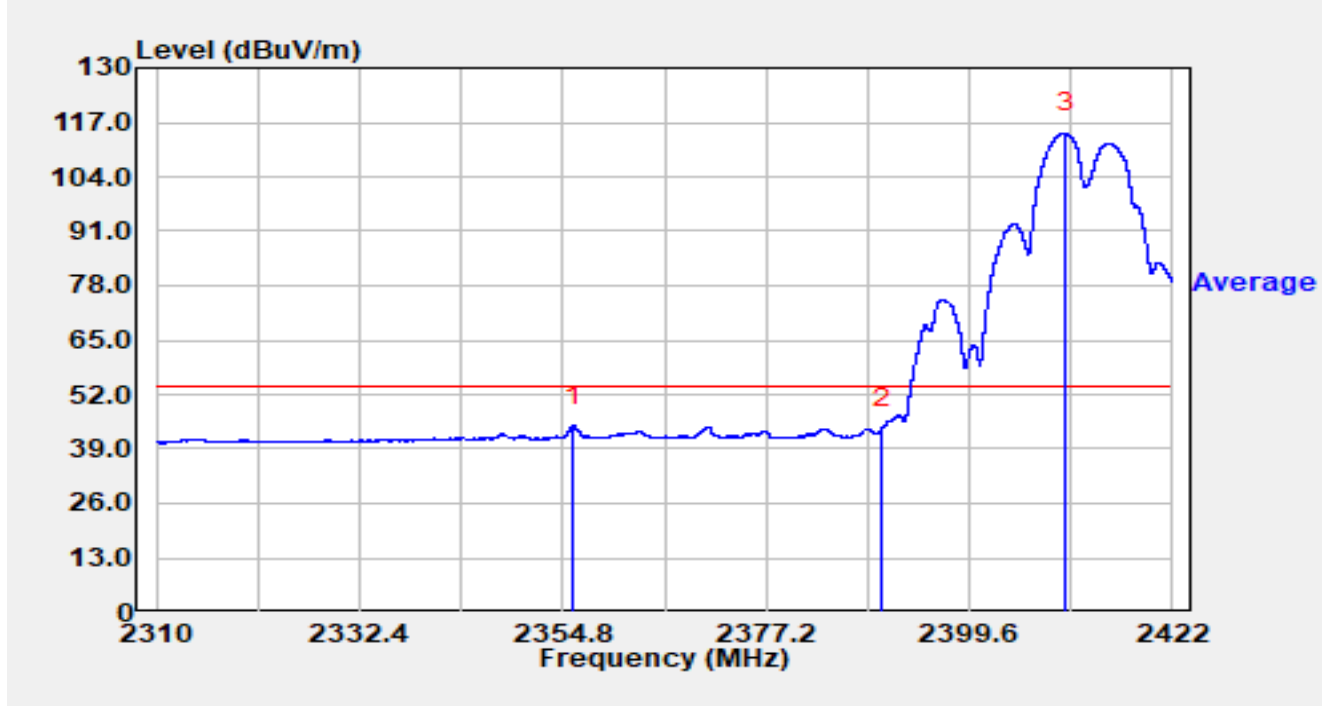


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2355.909	7.77	36.71	44.49	-9.51	54.00	Average
2		2390.000	7.07	36.83	43.90	-10.10	54.00	Average
3		2410.240	77.57	36.97	114.53	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11b at 2462MHz		

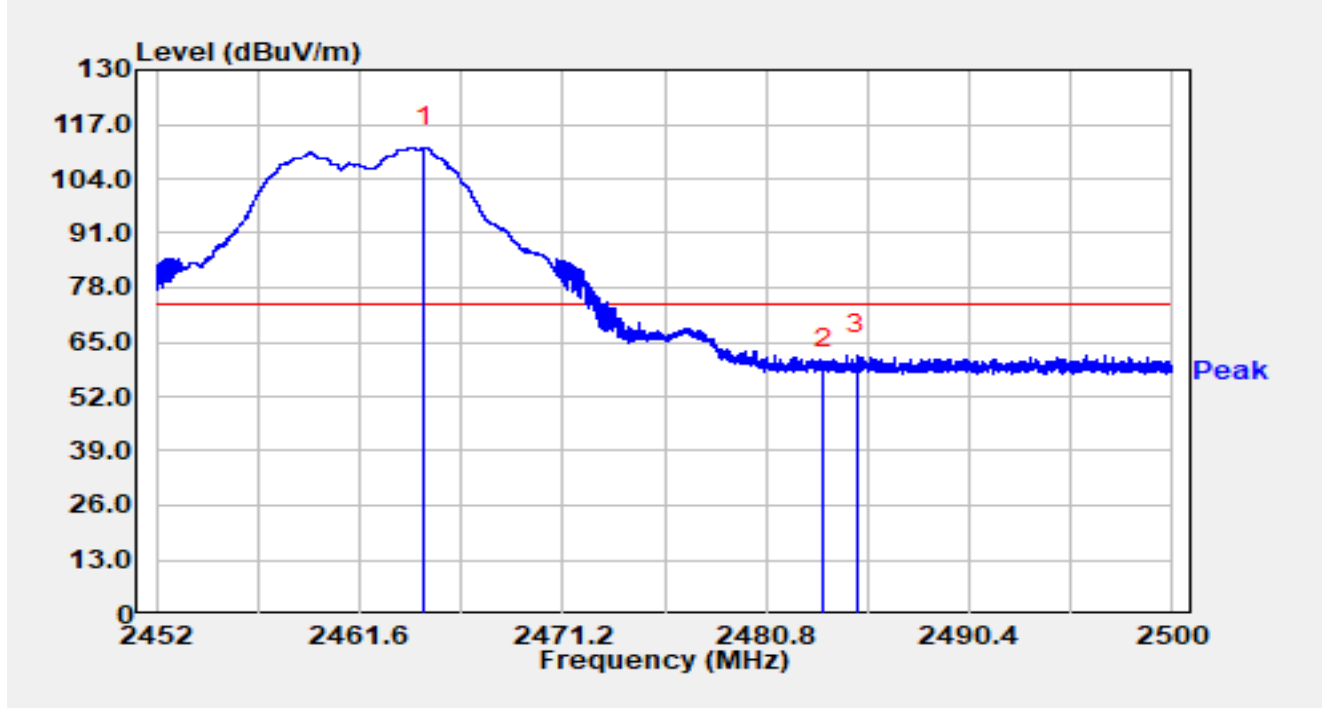


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2464.677	74.45	37.01	111.45	N/A	N/A	Peak
2		2483.500	21.78	37.05	58.83	-15.17	74.00	Peak
3	*	2485.110	24.81	37.06	61.86	-12.14	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11b at 2462MHz		

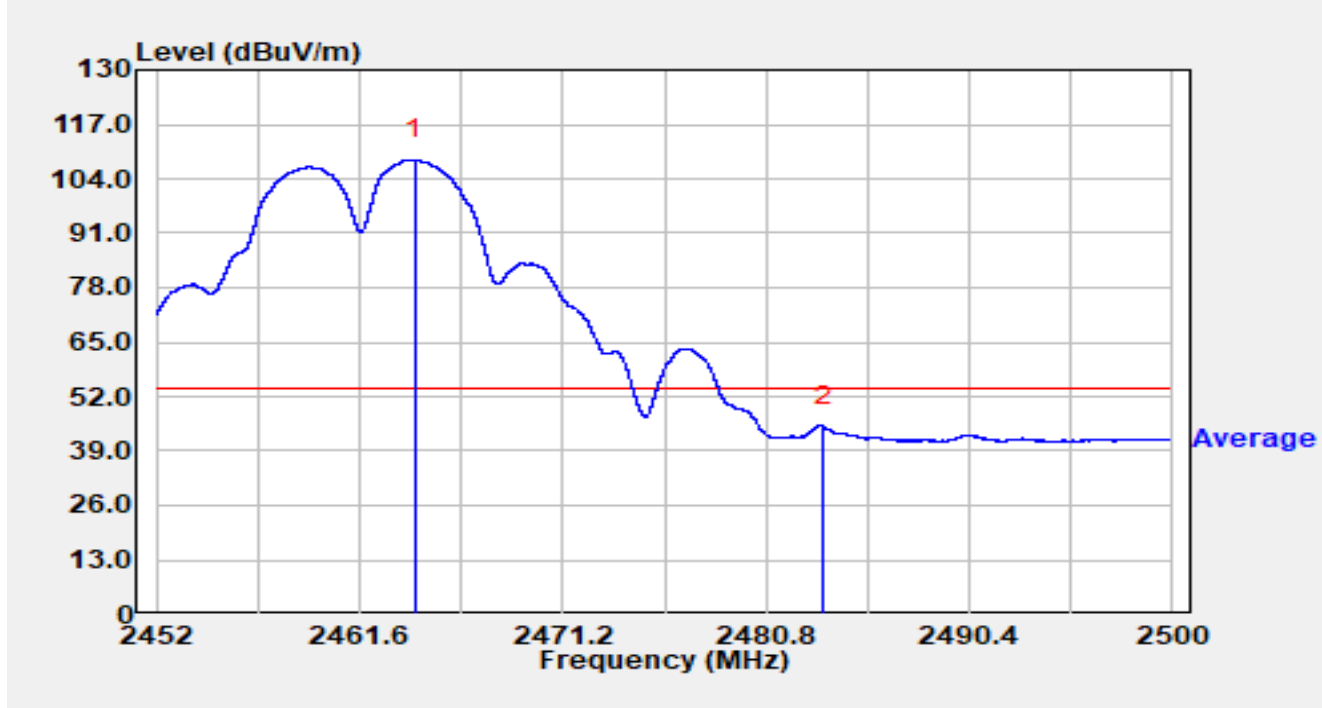


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2464.206	71.56	37.01	108.56	N/A	N/A	Average
2	*	2483.500	7.84	37.05	44.90	-9.10	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11b at 2462MHz		

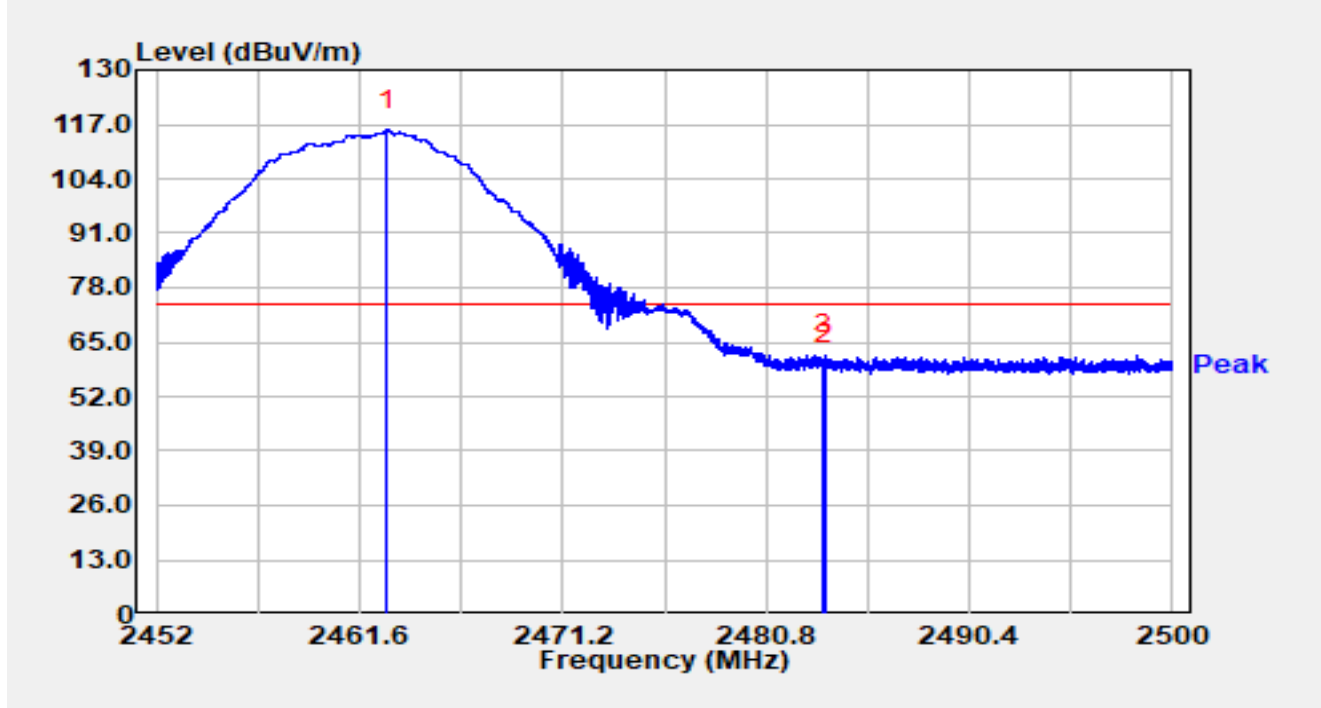


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.877	78.58	37.00	115.58	N/A	N/A	Peak
2		2483.500	22.63	37.05	59.68	-14.32	74.00	Peak
3	*	2483.598	24.93	37.05	61.98	-12.02	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11b at 2462MHz		

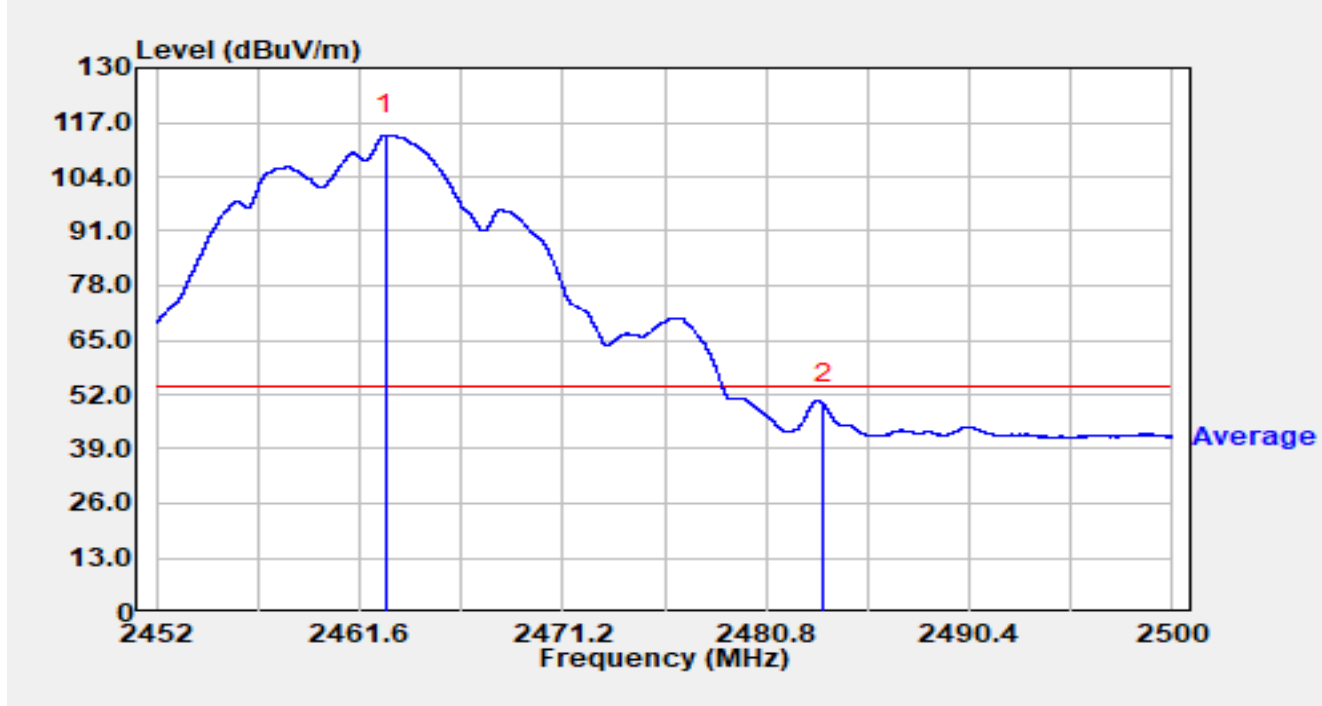


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.805	76.81	37.00	113.81	N/A	N/A	Average
2	*	2483.500	12.66	37.05	49.71	-4.29	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2412MHz		

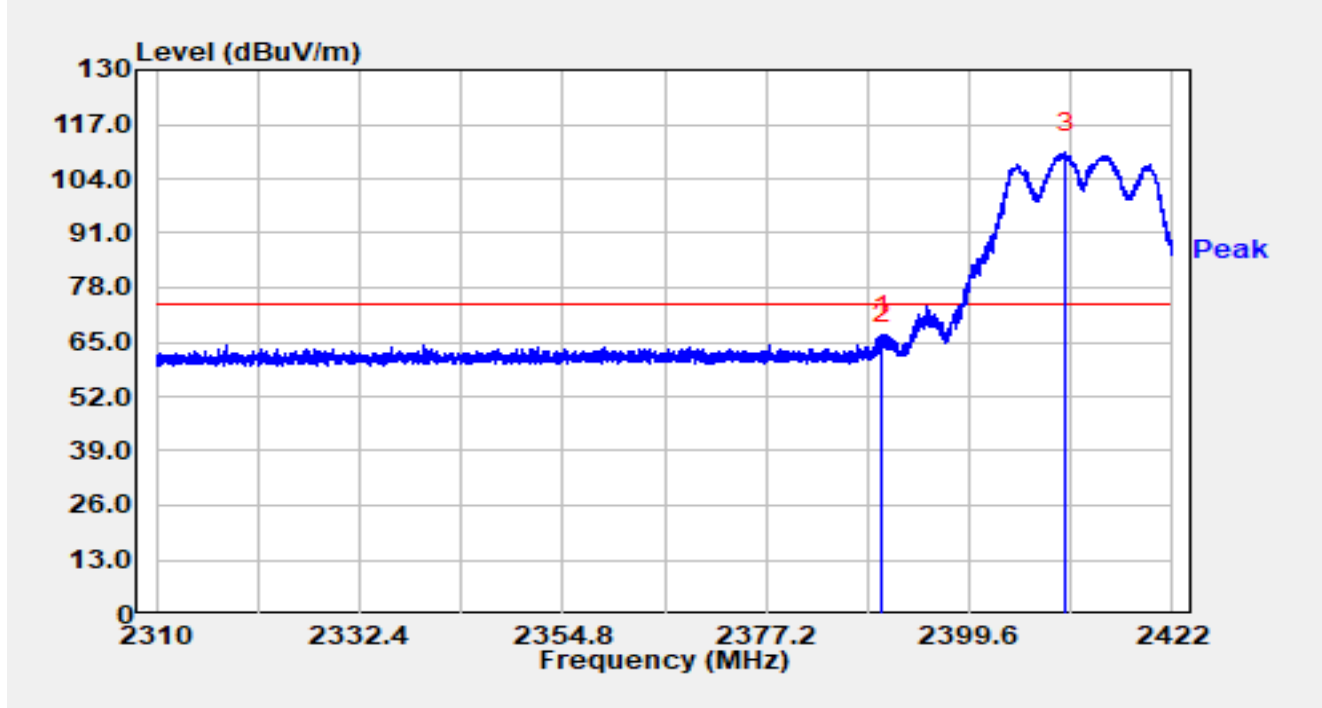


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.923	29.84	36.83	66.67	-7.33	74.00	Peak
2		2390.000	27.67	36.83	64.50	-9.50	74.00	Peak
3		2410.195	73.21	36.97	110.18	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2412MHz		

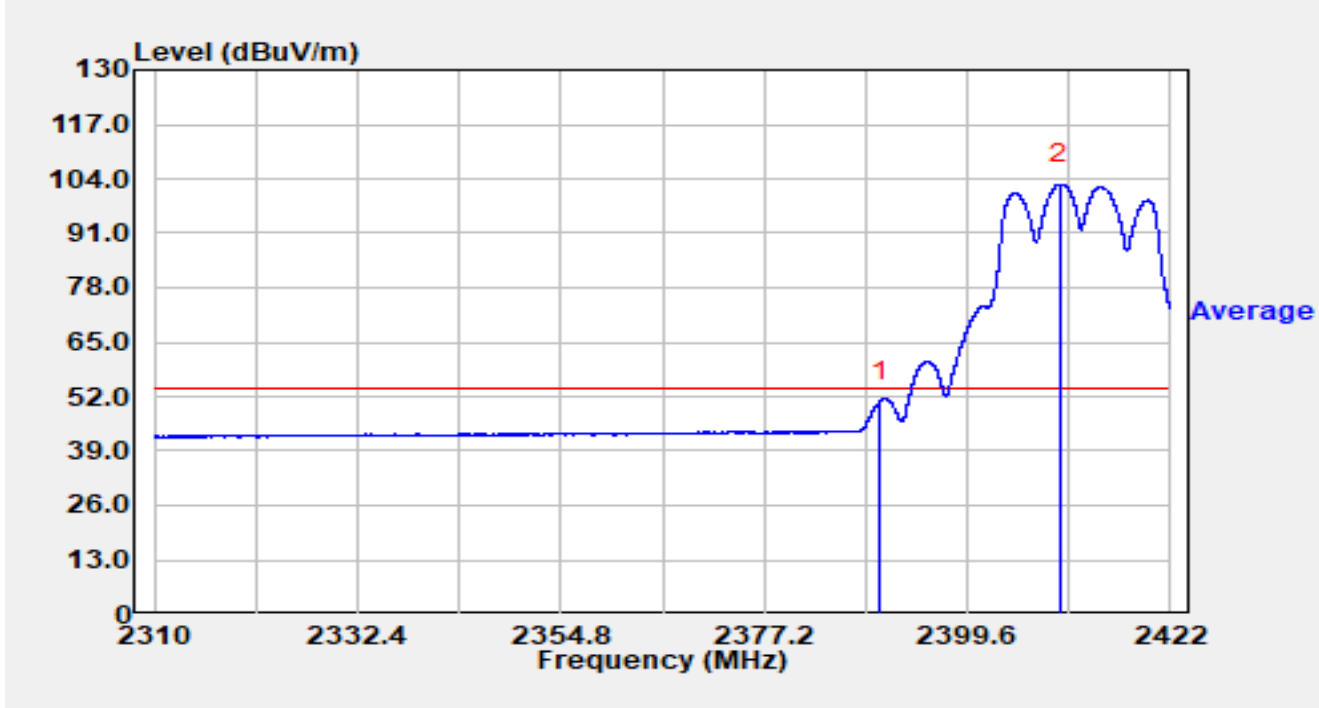


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	14.10	36.83	50.94	-3.06	54.00	Average
2		2409.848	65.76	36.97	102.73	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2412MHz		

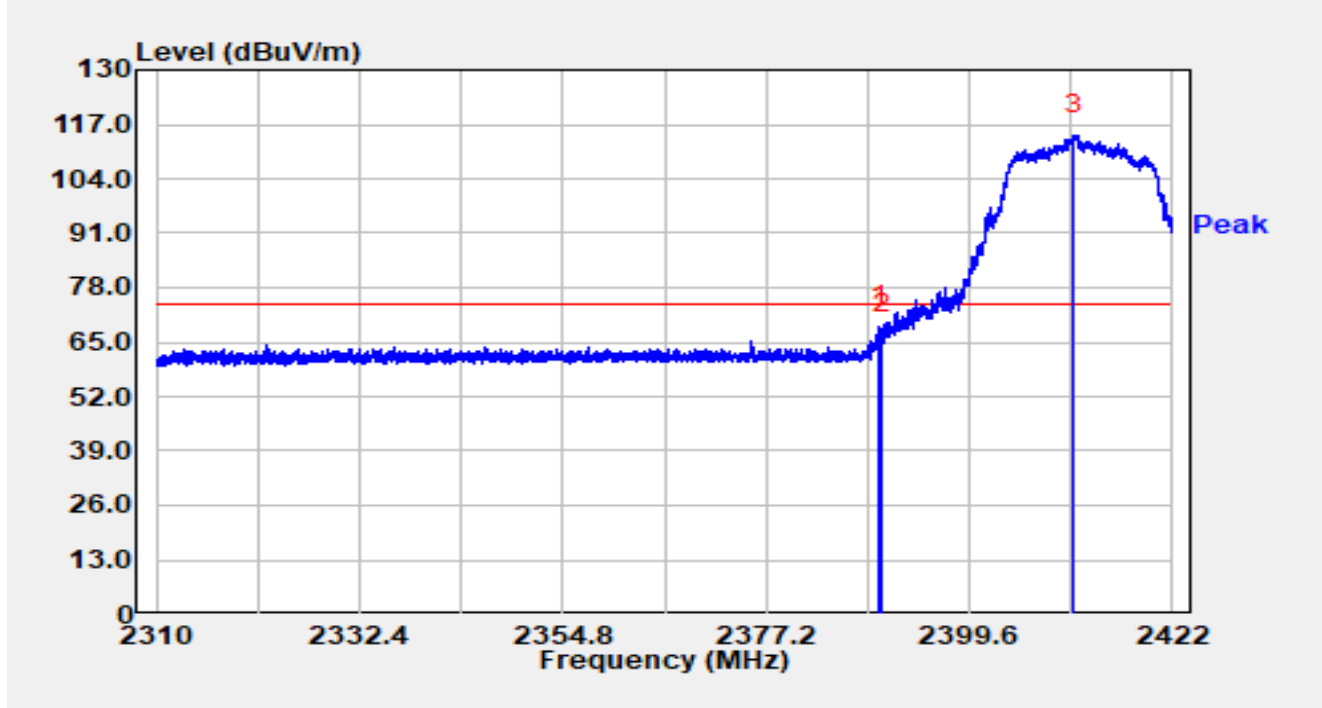


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.744	32.07	36.83	68.89	-5.11	74.00	Peak
2		2390.000	30.17	36.83	67.00	-7.00	74.00	Peak
3		2411.158	77.49	36.97	114.46	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2412MHz		

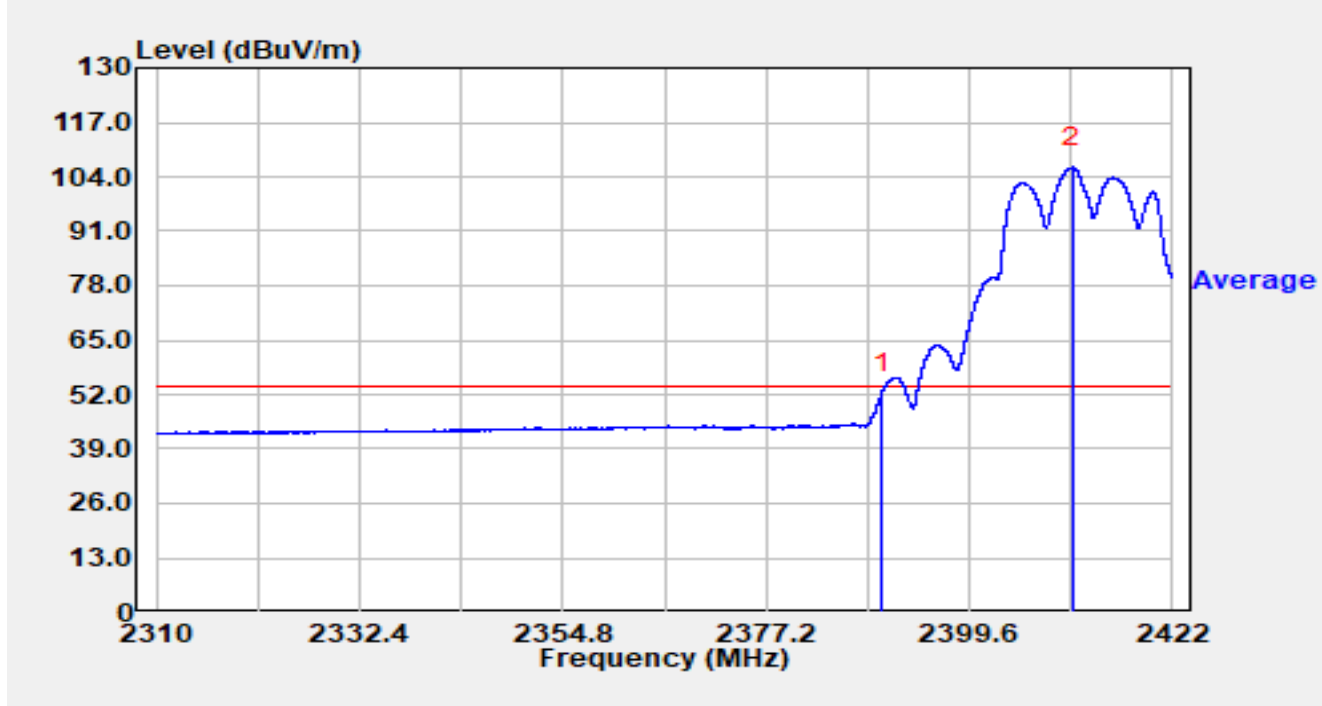


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	15.58	36.83	52.41	-1.59	54.00	Average
2		2411.002	69.26	36.97	106.23	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2417MHz		

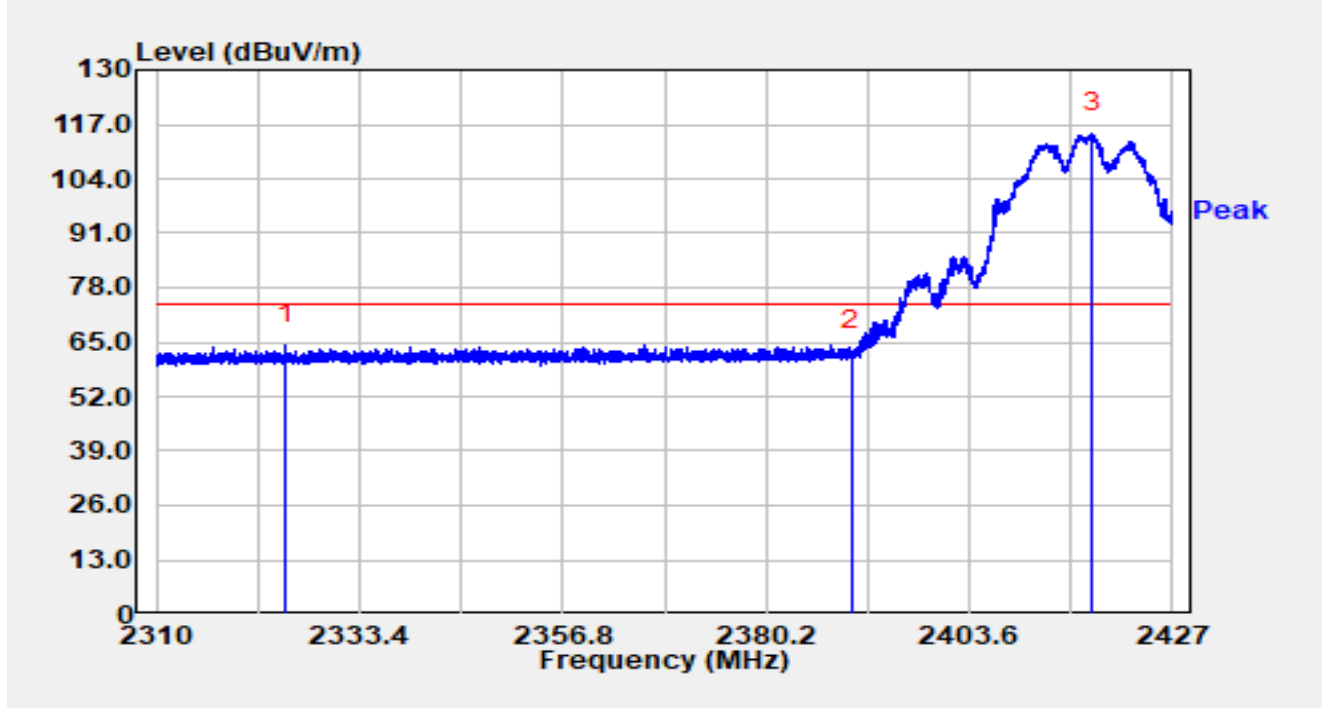


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2324.859	27.69	36.61	64.30	-9.70	74.00	Peak
2		2390.000	26.07	36.83	62.90	-11.10	74.00	Peak
3		2417.734	77.90	37.00	114.90	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2417MHz		

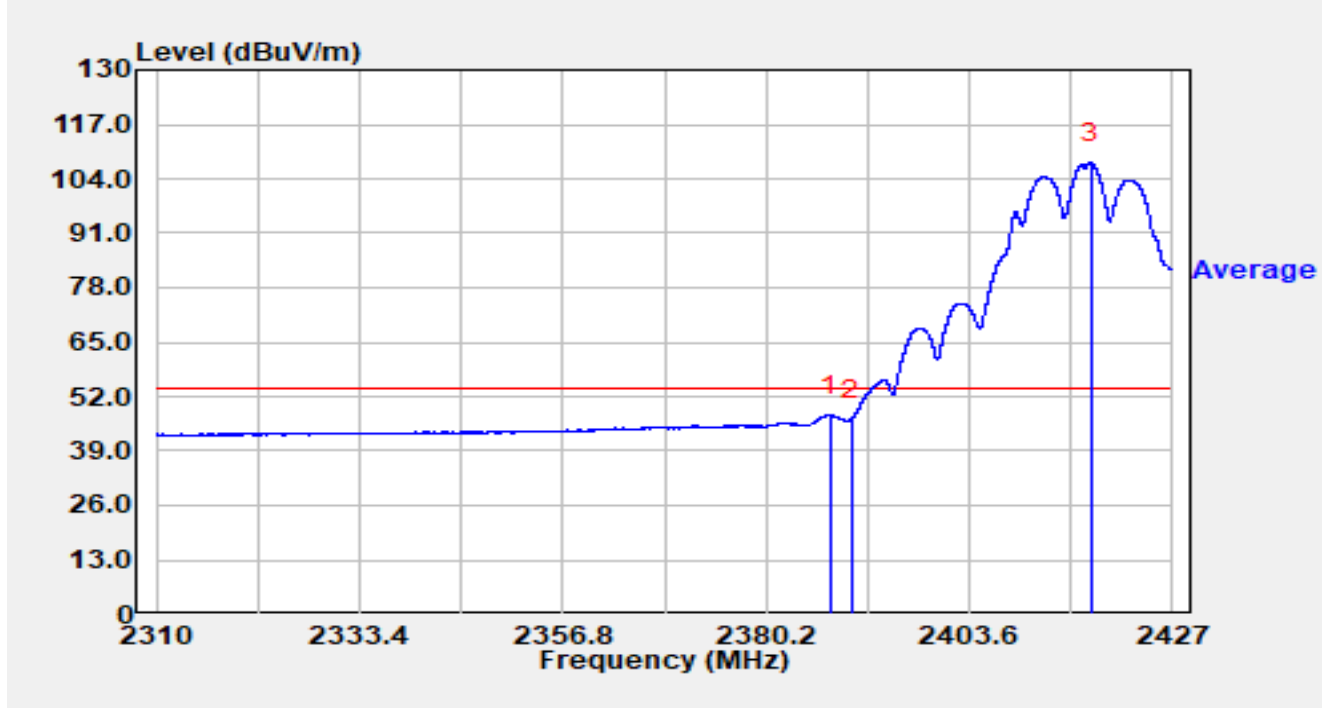


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.548	10.75	36.82	47.57	-6.43	54.00	Average
2		2390.000	9.65	36.83	46.48	-7.52	54.00	Average
3		2417.558	70.86	37.00	107.86	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2417MHz		

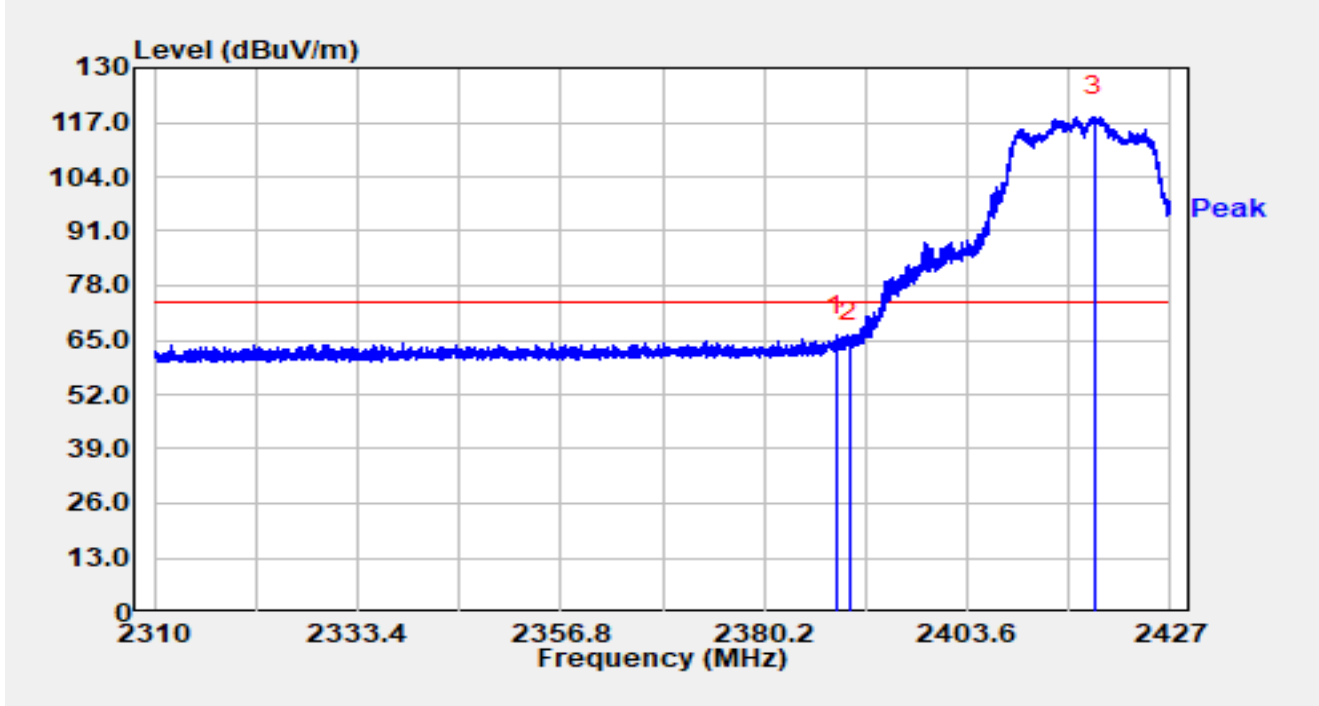


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.448	29.24	36.82	66.06	-7.94	74.00	Peak
2		2390.000	27.72	36.83	64.55	-9.45	74.00	Peak
3		2418.202	81.34	37.00	118.34	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2417MHz		

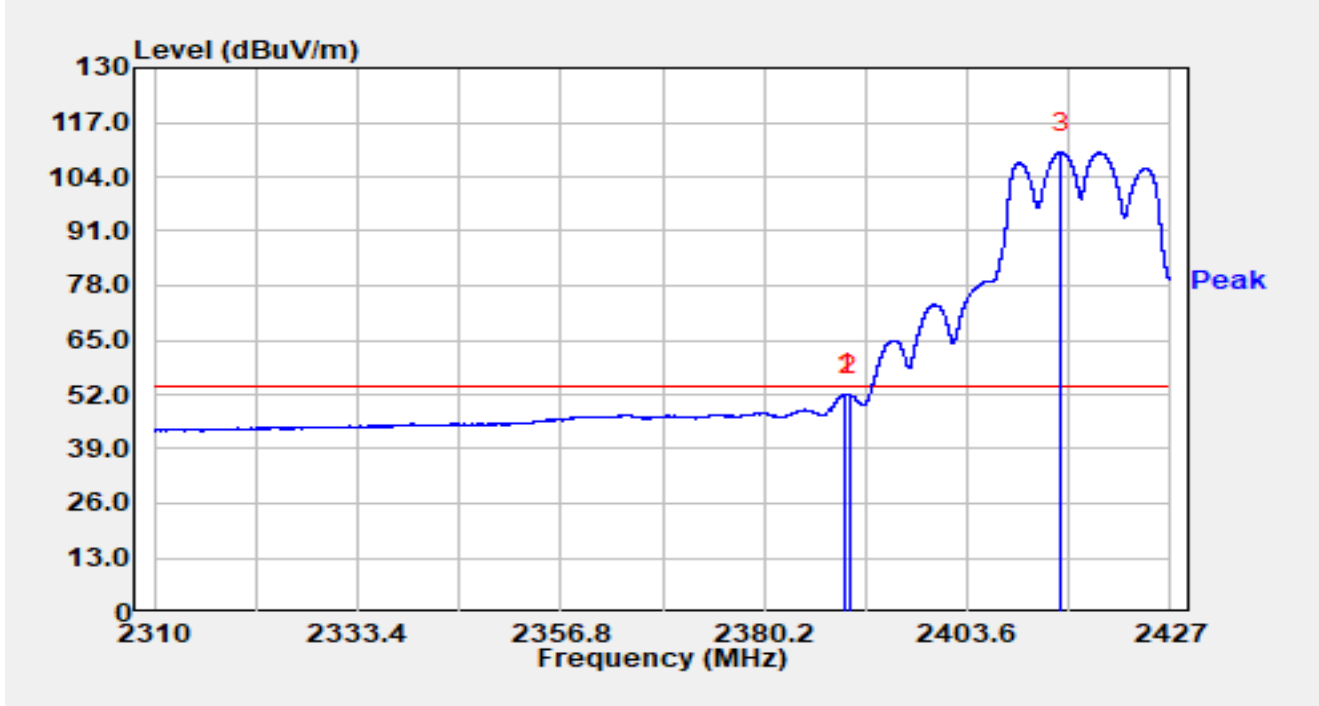


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.607	15.40	36.83	52.23	-1.77	54.00	Peak
2		2390.000	15.16	36.83	51.99	-2.01	54.00	Peak
3		2414.446	72.78	36.98	109.77	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2457MHz		

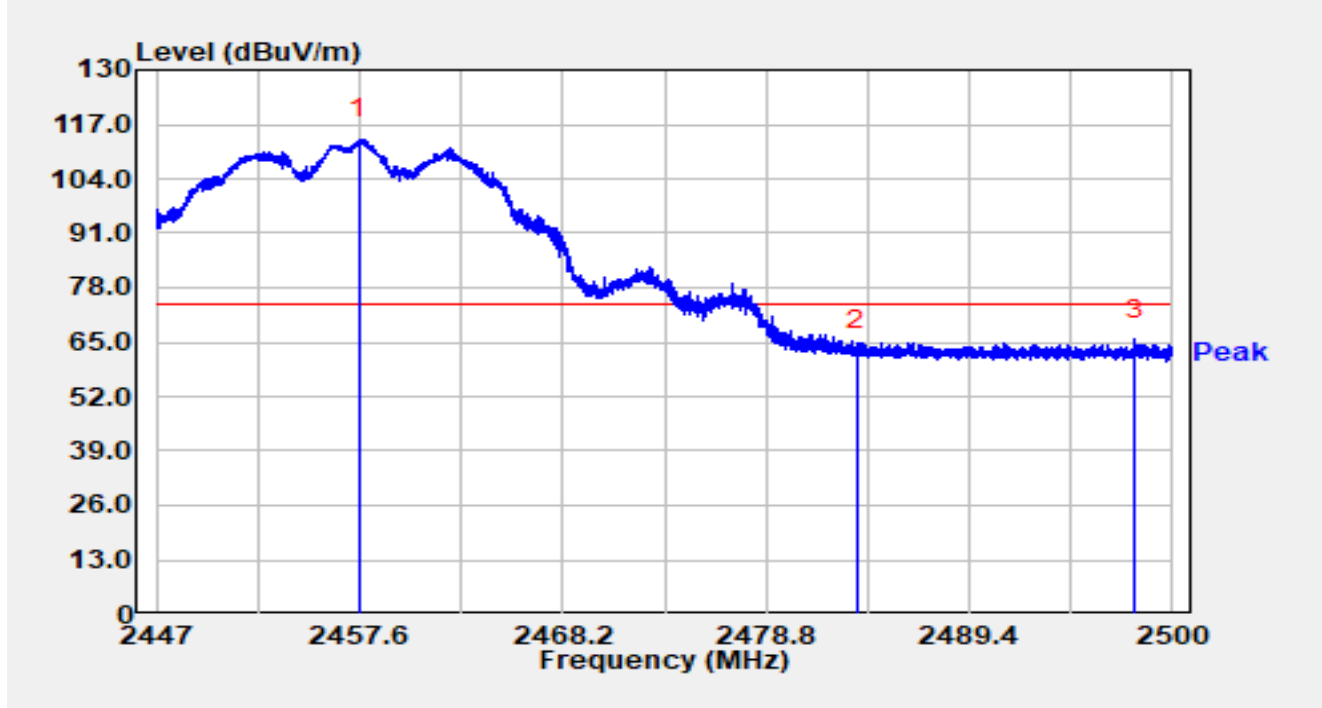


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2457.568	76.42	36.99	113.41	N/A	N/A	Peak
2		2483.500	26.08	37.05	63.13	-10.87	74.00	Peak
3	*	2498.060	28.41	37.08	65.49	-8.51	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2457MHz		

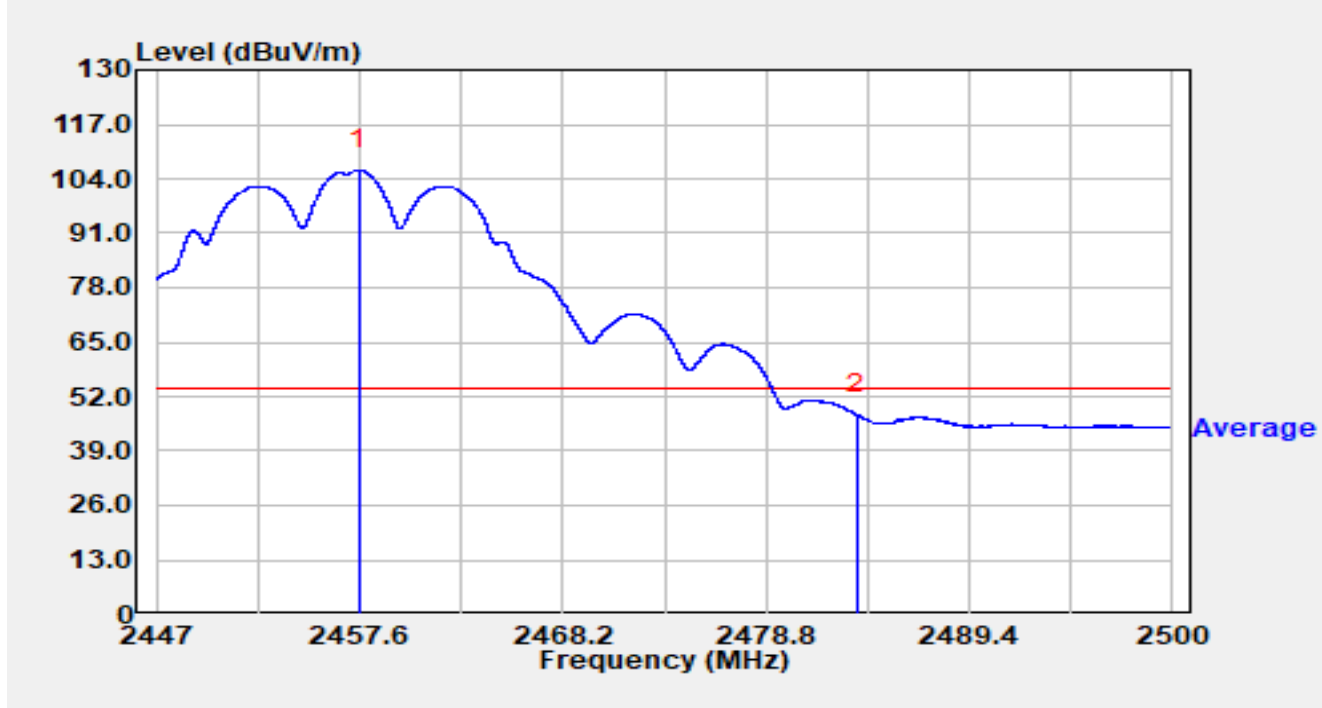


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2457.573	69.20	36.99	106.19	N/A	N/A	Average
2	*	2483.500	10.65	37.05	47.70	-6.30	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2457MHz		

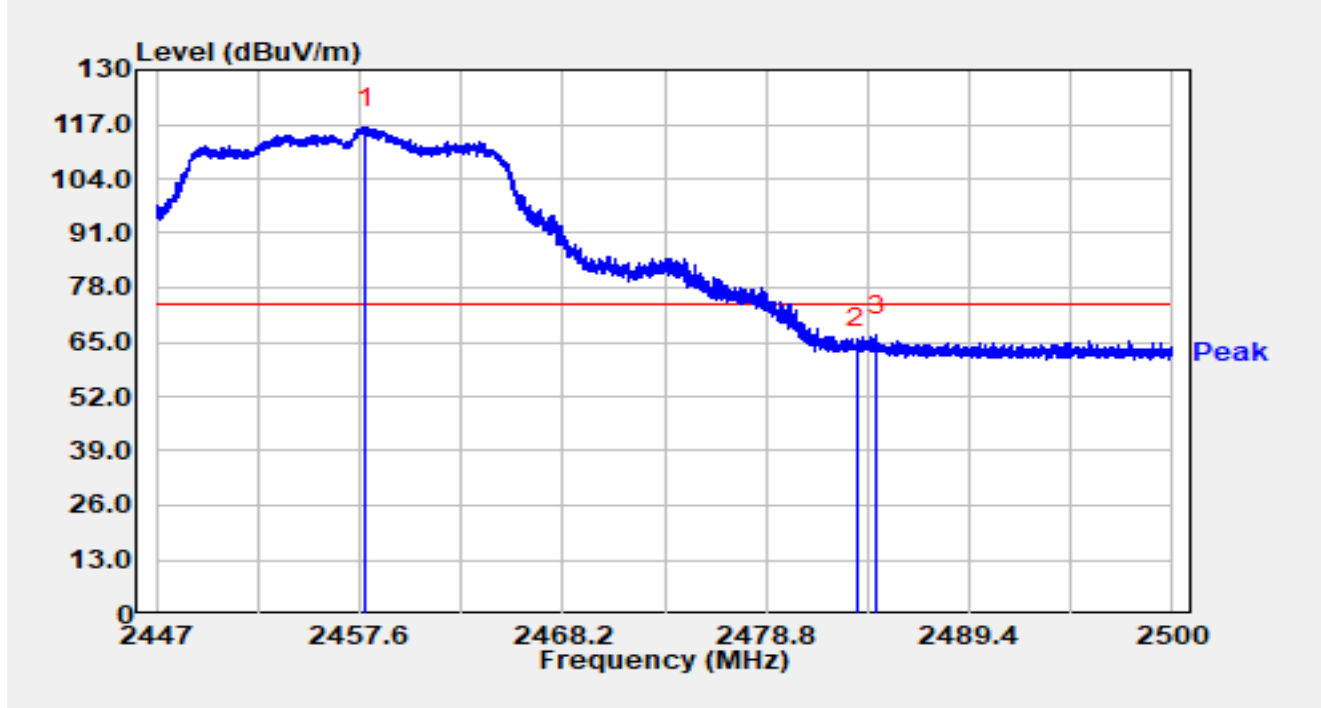


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2457.886	79.13	36.99	116.12	N/A	N/A	Peak
2		2483.500	26.31	37.05	63.36	-10.64	74.00	Peak
3	*	2484.561	29.55	37.06	66.60	-7.40	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2457MHz		

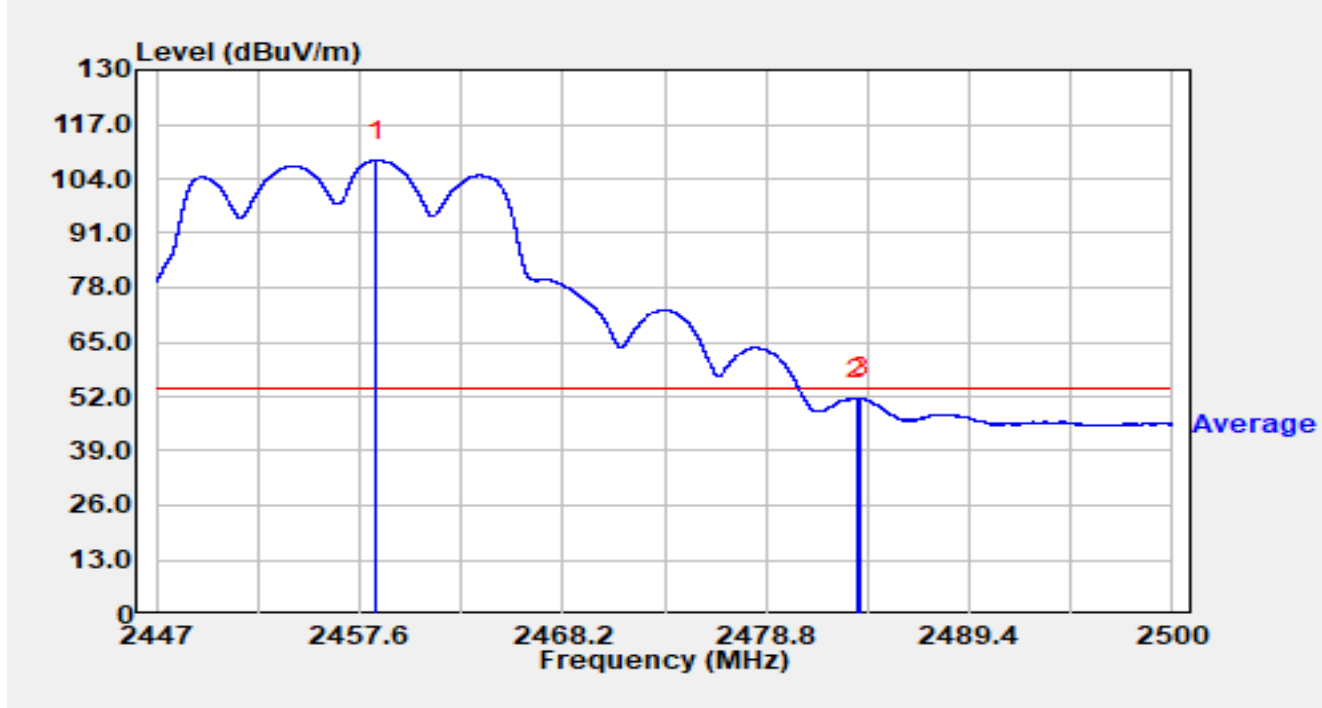


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2458.485	71.41	36.99	108.40	N/A	N/A	Average
2		2483.500	14.42	37.05	51.47	-2.53	54.00	Average
3	*	2483.745	14.59	37.05	51.64	-2.36	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2462MHz		

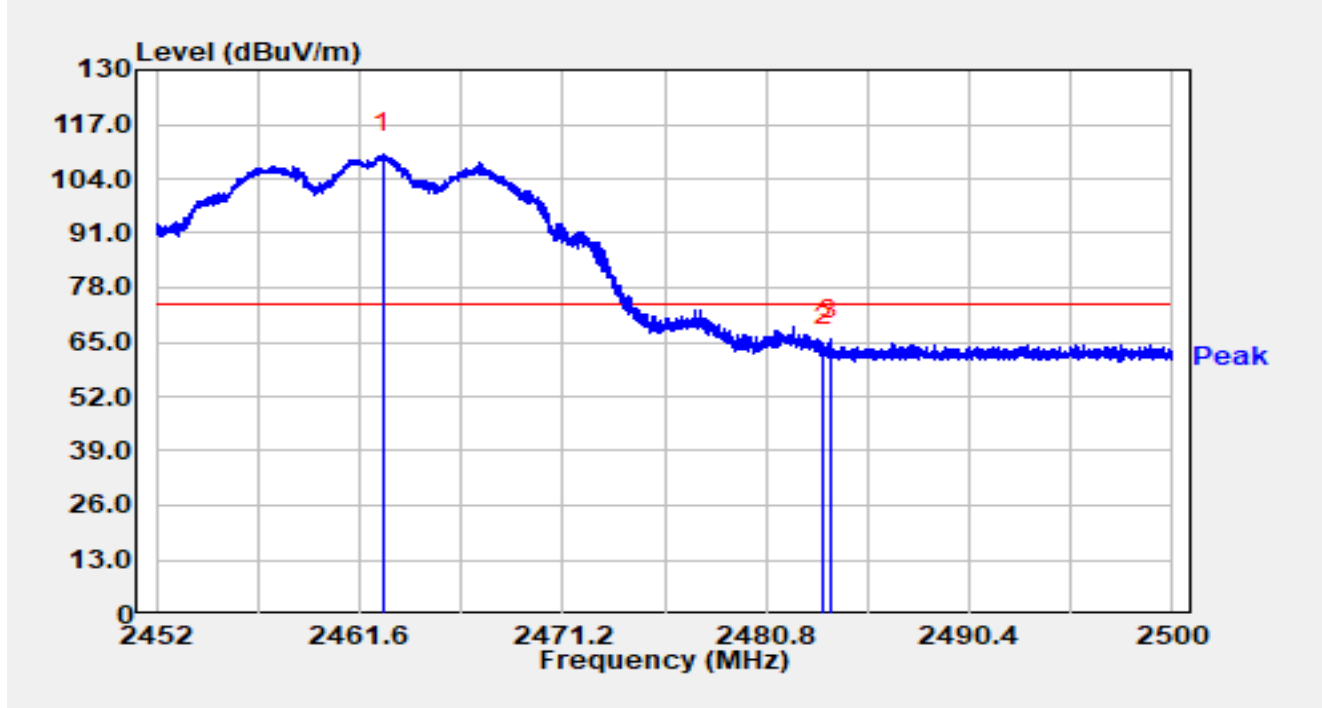


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.728	72.89	37.00	109.90	N/A	N/A	Peak
2		2483.500	26.89	37.05	63.94	-10.06	74.00	Peak
3	*	2483.819	28.60	37.05	65.65	-8.35	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2462MHz		

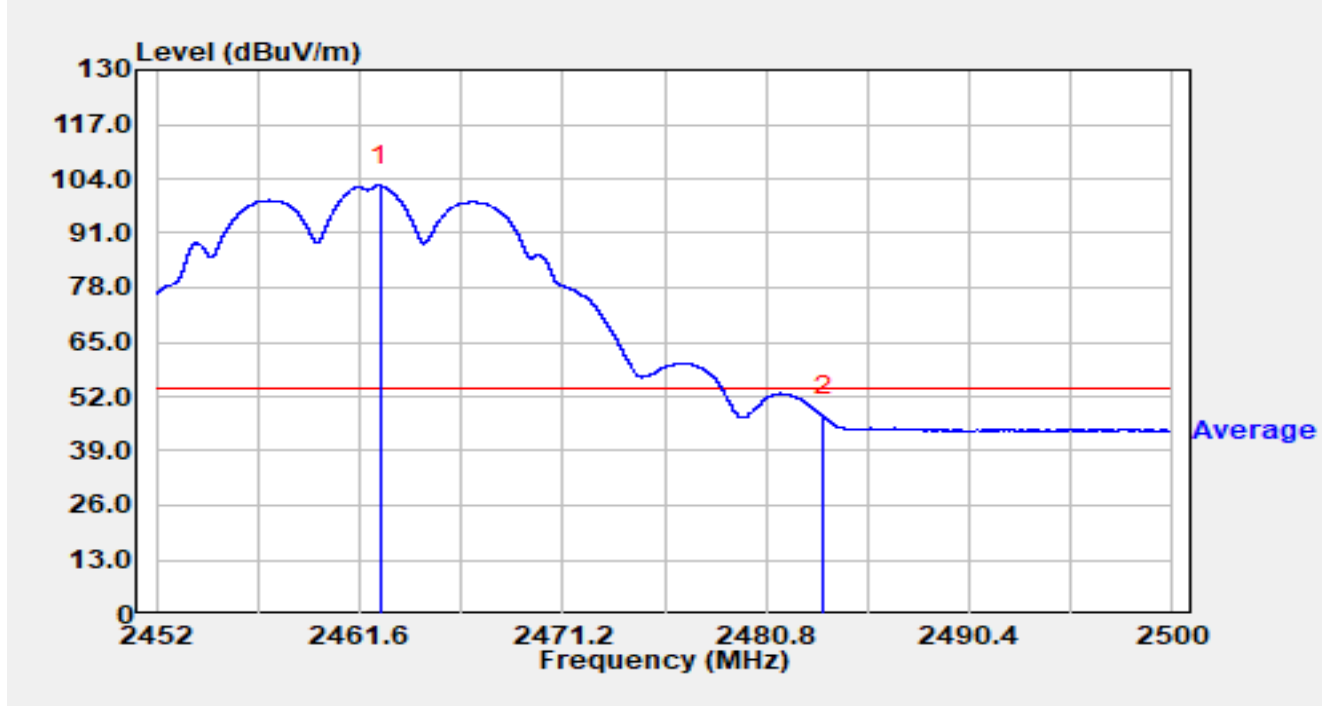


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.555	65.37	37.00	102.38	N/A	N/A	Average
2	*	2483.500	10.34	37.05	47.39	-6.61	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2462MHz		

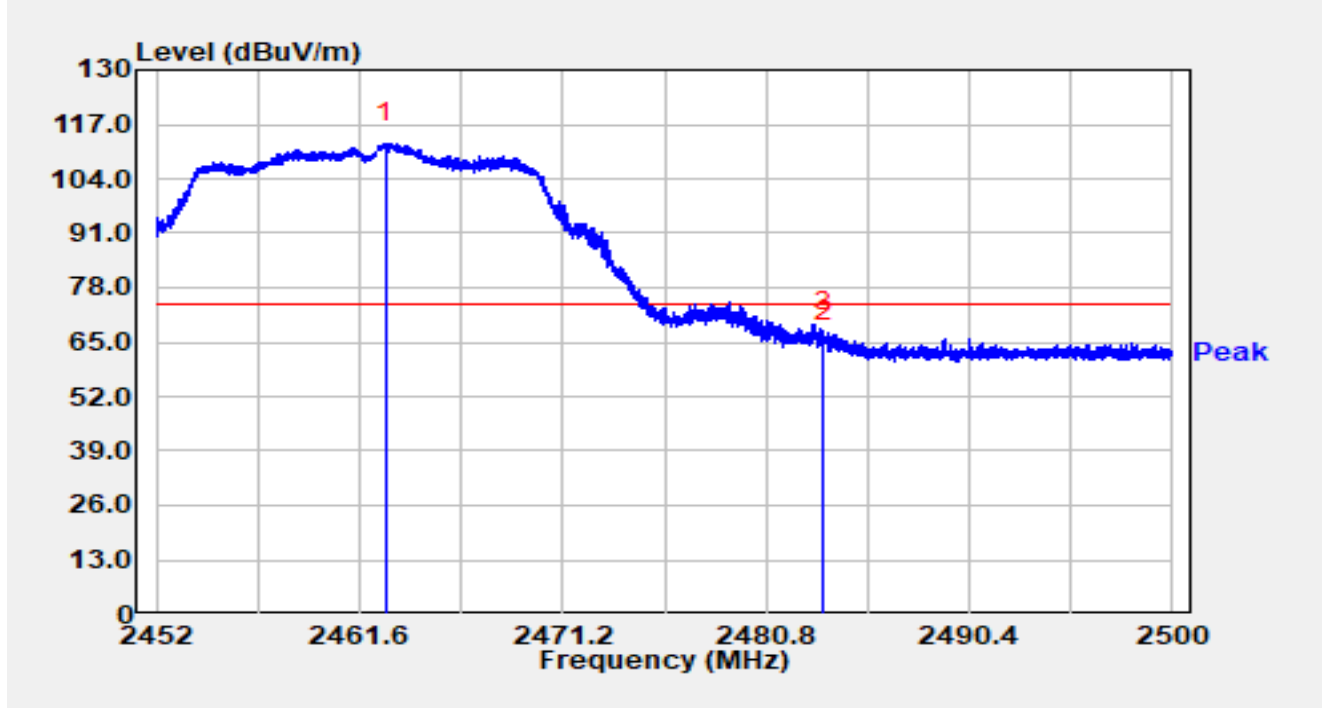


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.833	75.47	37.00	112.47	N/A	N/A	Peak
2		2483.500	28.05	37.05	65.10	-8.90	74.00	Peak
3	*	2483.526	30.43	37.05	67.49	-6.51	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2462MHz		

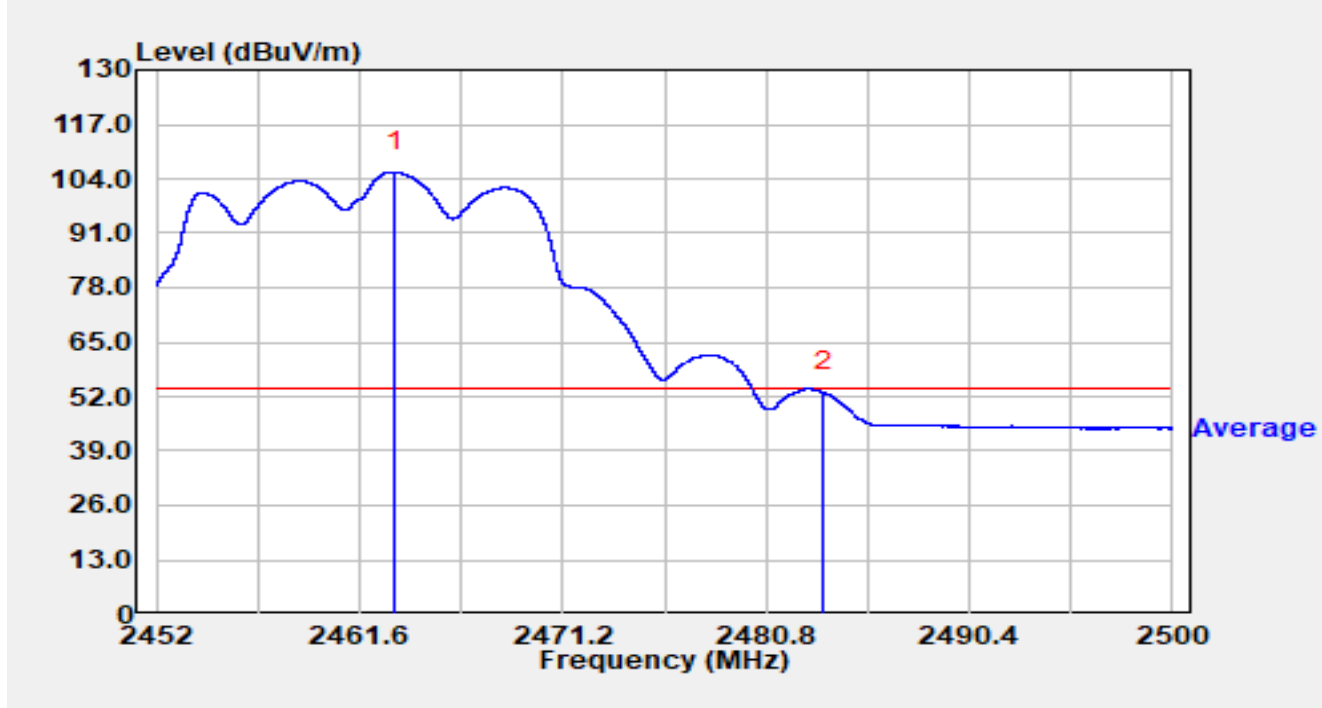


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2463.242	68.57	37.00	105.57	N/A	N/A	Average
2	*	2483.500	16.00	37.05	53.05	-0.95	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

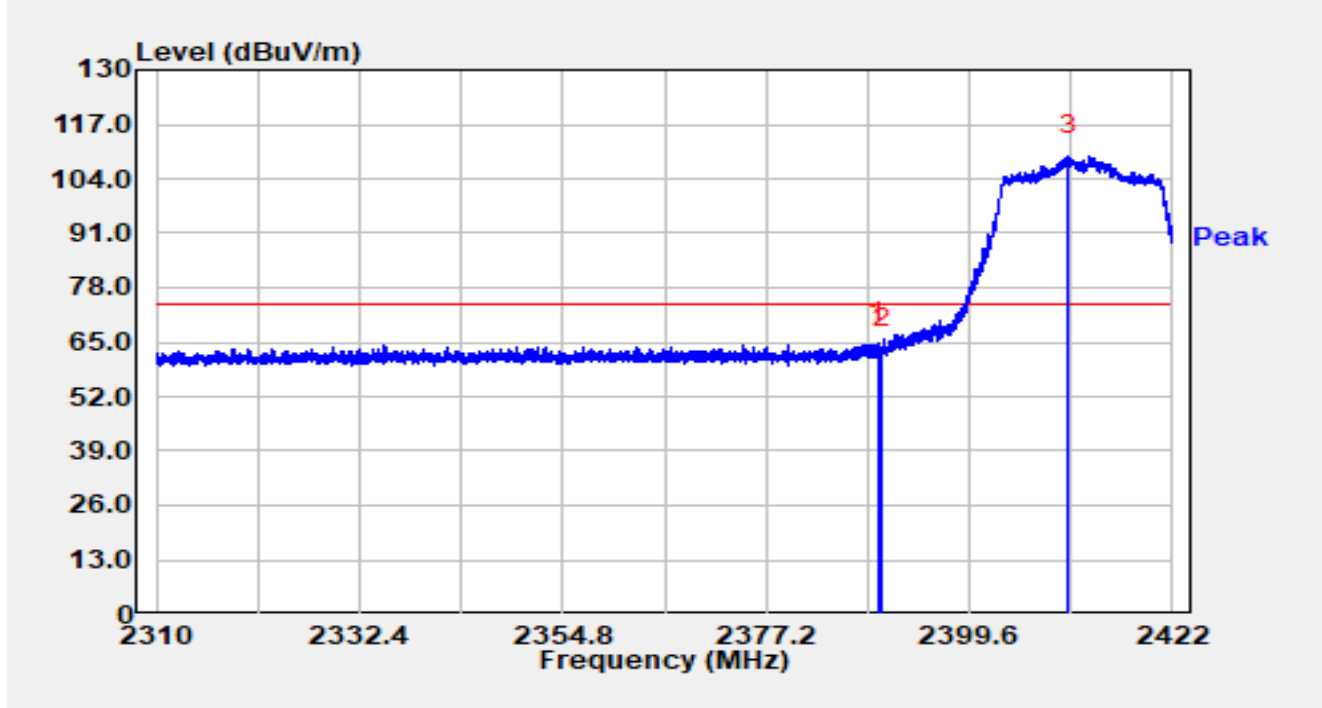


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.520	28.07	36.83	64.90	-9.10	74.00	Peak
2		2390.000	26.67	36.83	63.50	-10.50	74.00	Peak
3		2410.464	72.64	36.97	109.61	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

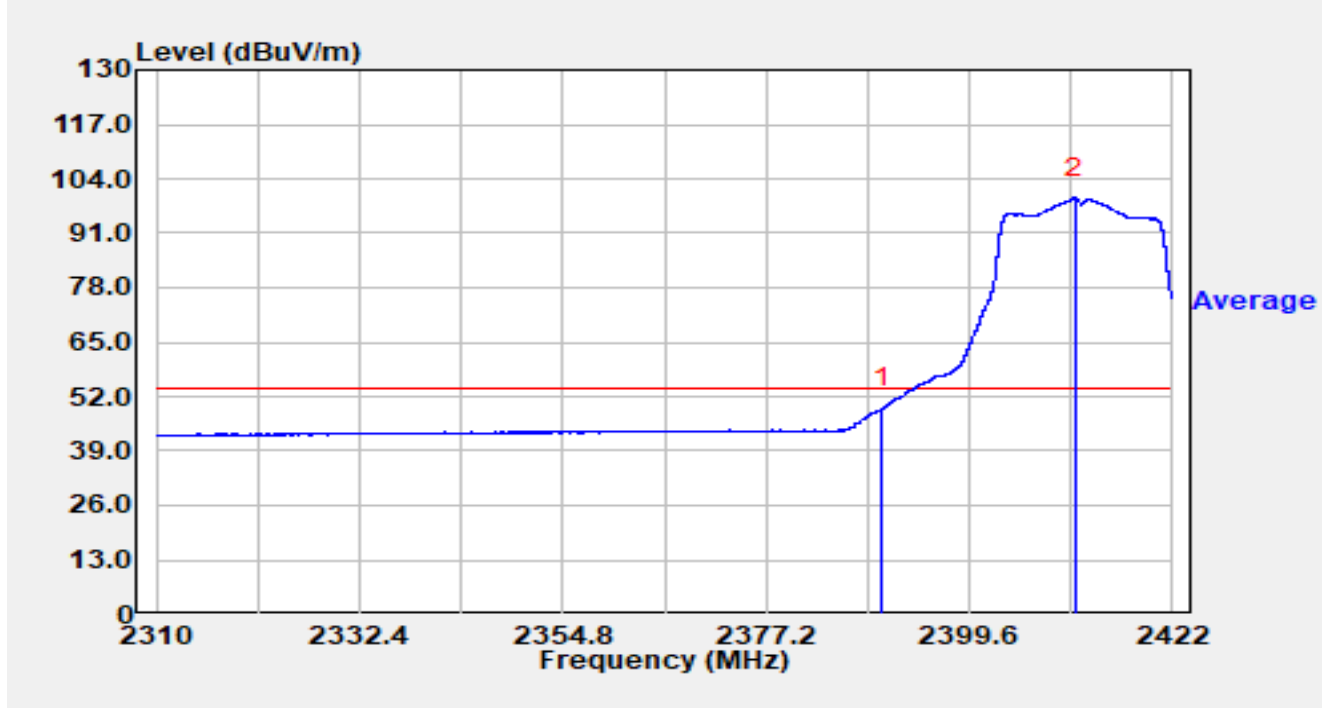


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	12.30	36.83	49.13	-4.87	54.00	Average
2		2411.315	62.43	36.97	99.41	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

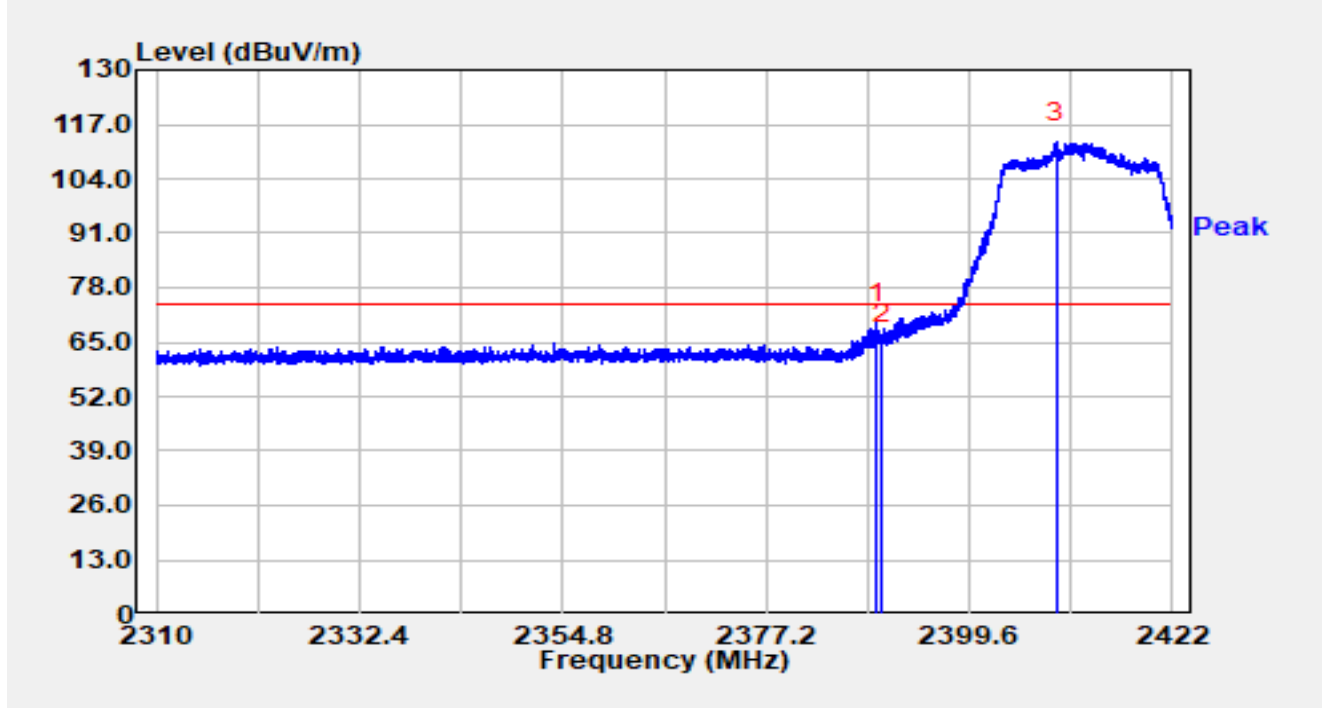


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.352	32.62	36.83	69.45	-4.55	74.00	Peak
2		2390.000	27.68	36.83	64.51	-9.49	74.00	Peak
3		2409.131	75.63	36.96	112.59	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

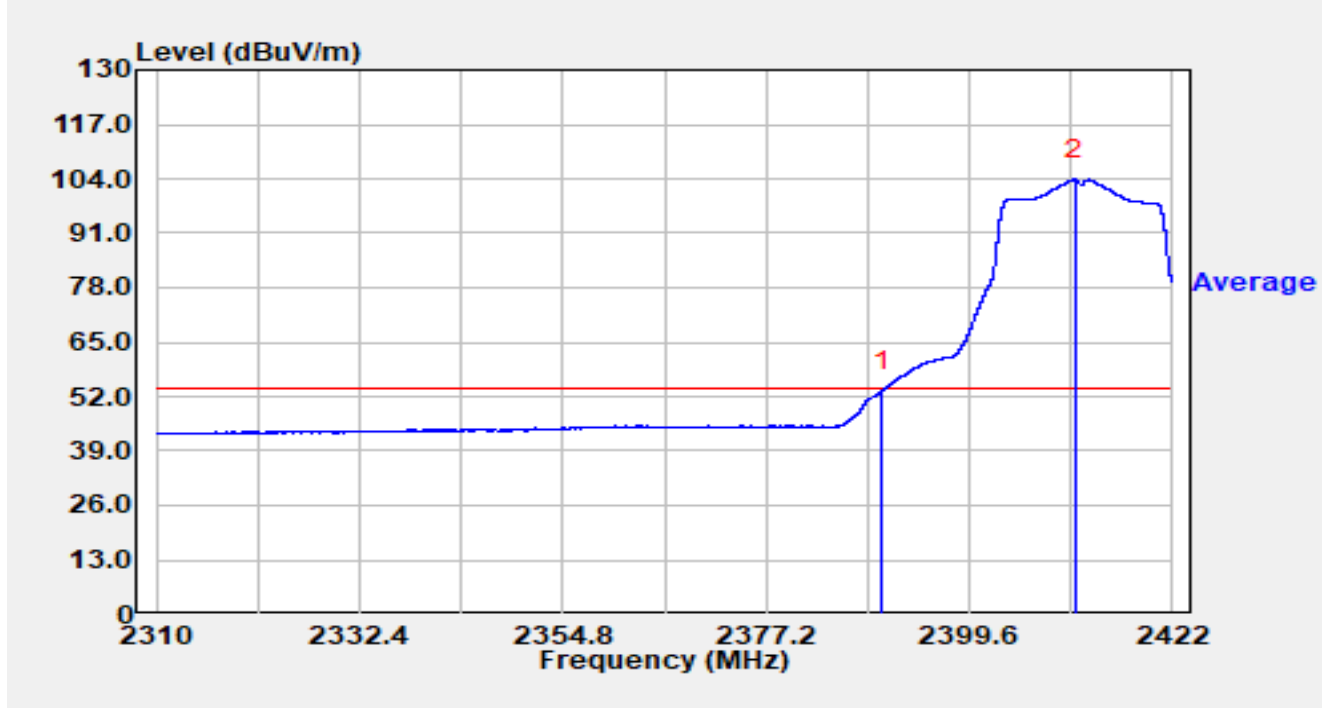


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	16.53	36.83	53.36	-0.64	54.00	Average
2		2411.248	66.86	36.97	103.83	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2417MHz		

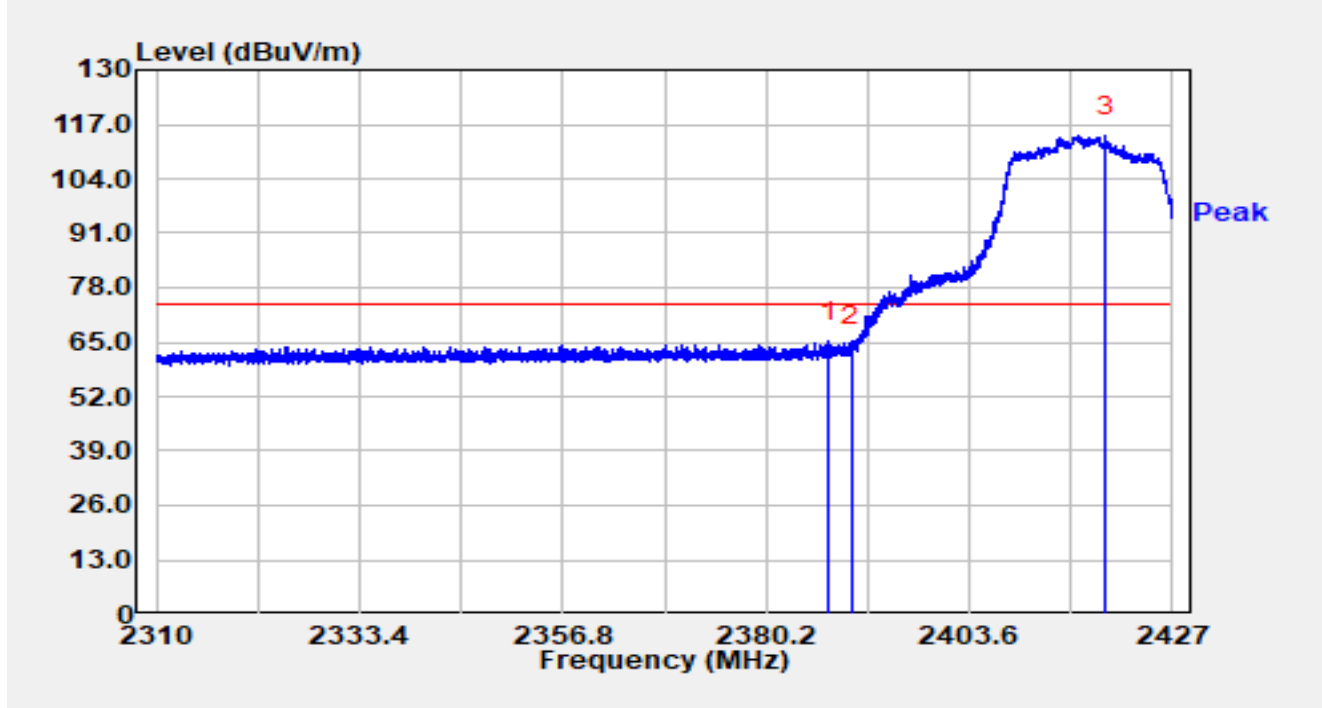


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.360	28.30	36.82	65.12	-8.88	74.00	Peak
2		2390.000	27.07	36.83	63.90	-10.10	74.00	Peak
3		2419.348	77.23	37.00	114.23	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2417MHz		

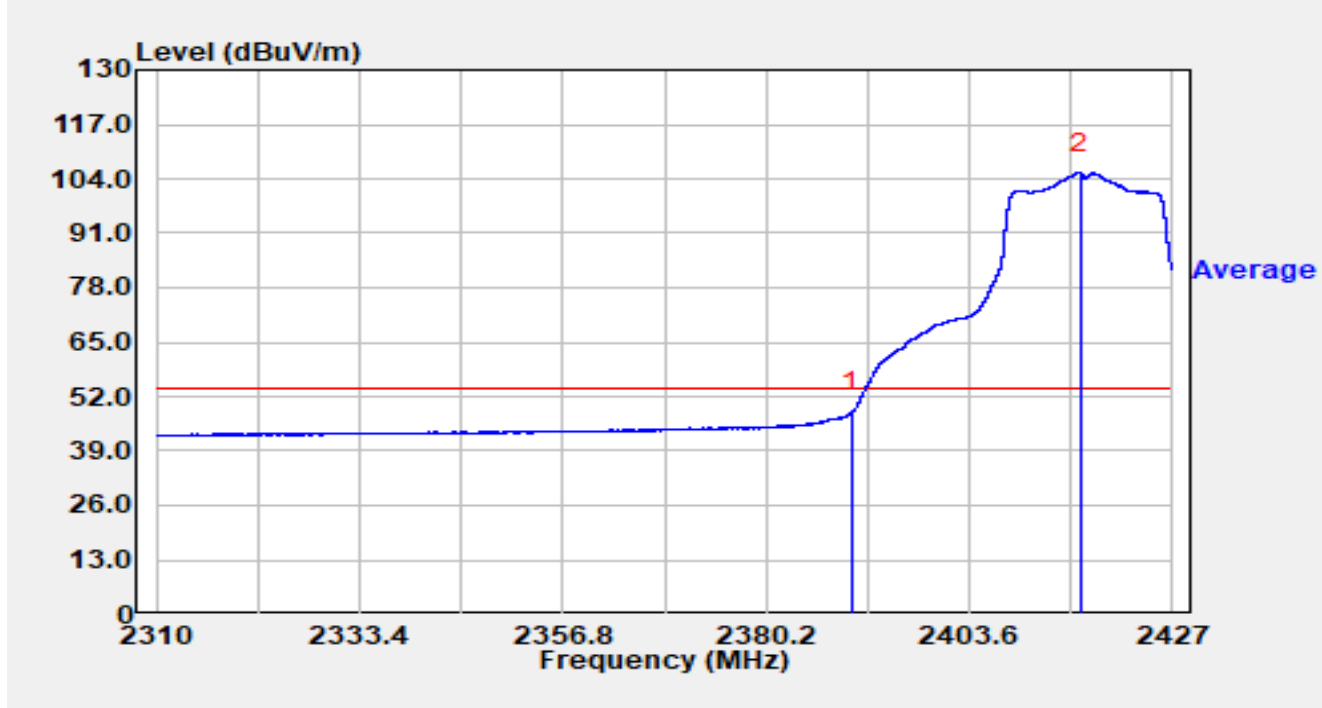


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	11.26	36.83	48.09	-5.91	54.00	Average
2		2416.376	68.48	36.99	105.47	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2417MHz		

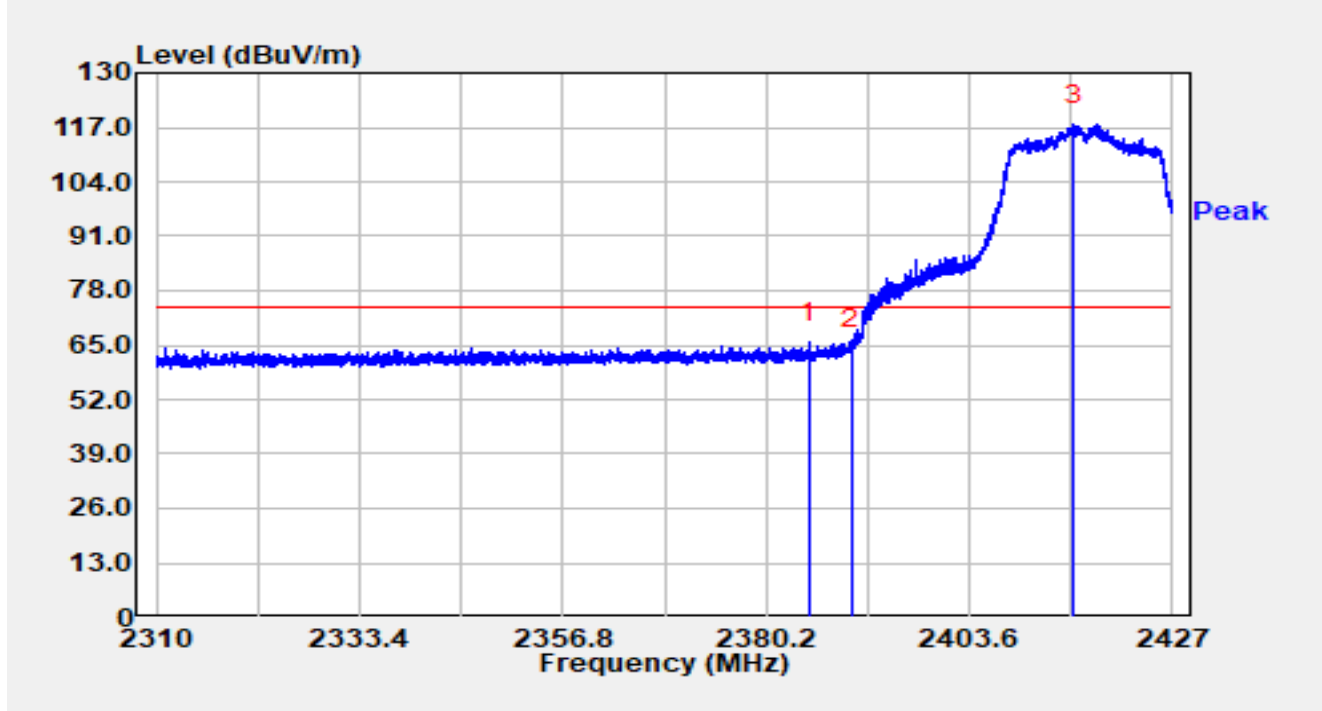


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2385.114	28.82	36.81	65.63	-8.37	74.00	Peak
2		2390.000	26.99	36.83	63.82	-10.18	74.00	Peak
3		2415.674	80.58	36.99	117.57	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2417MHz		

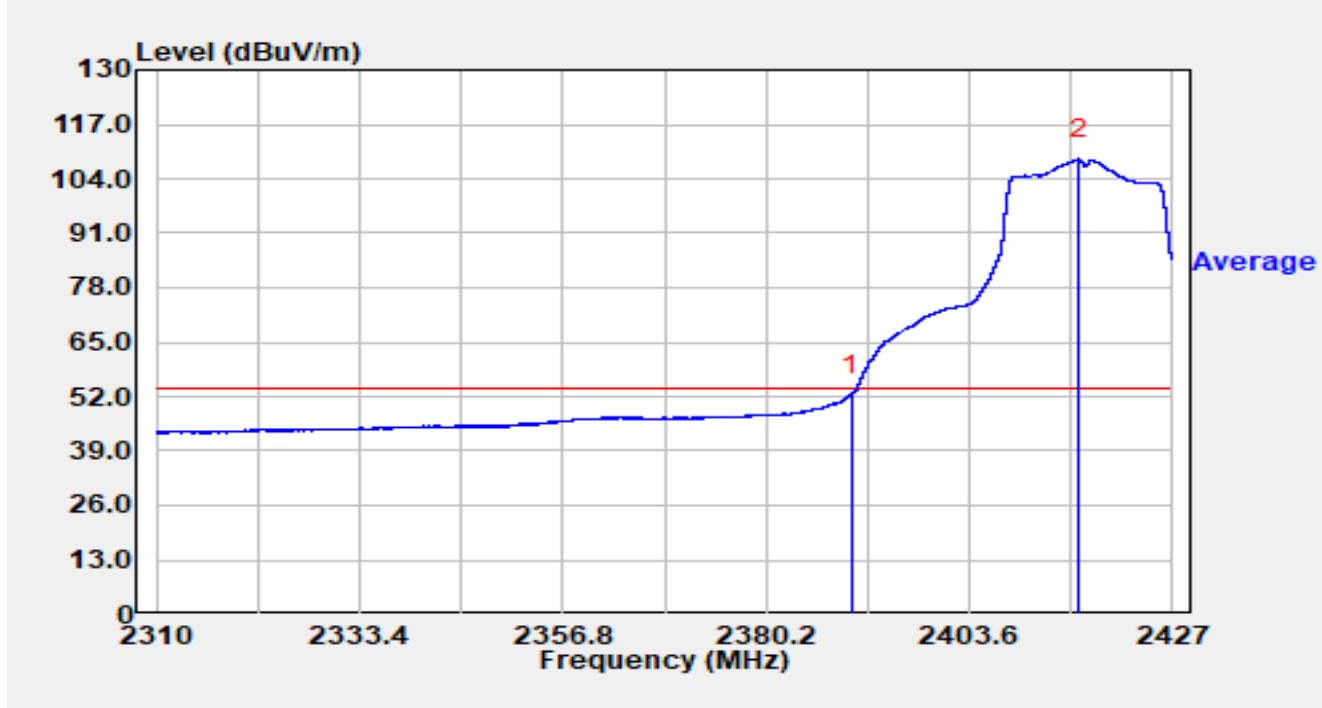


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	15.61	36.83	52.44	-1.56	54.00	Average
2		2416.213	71.69	36.99	108.68	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2457MHz		

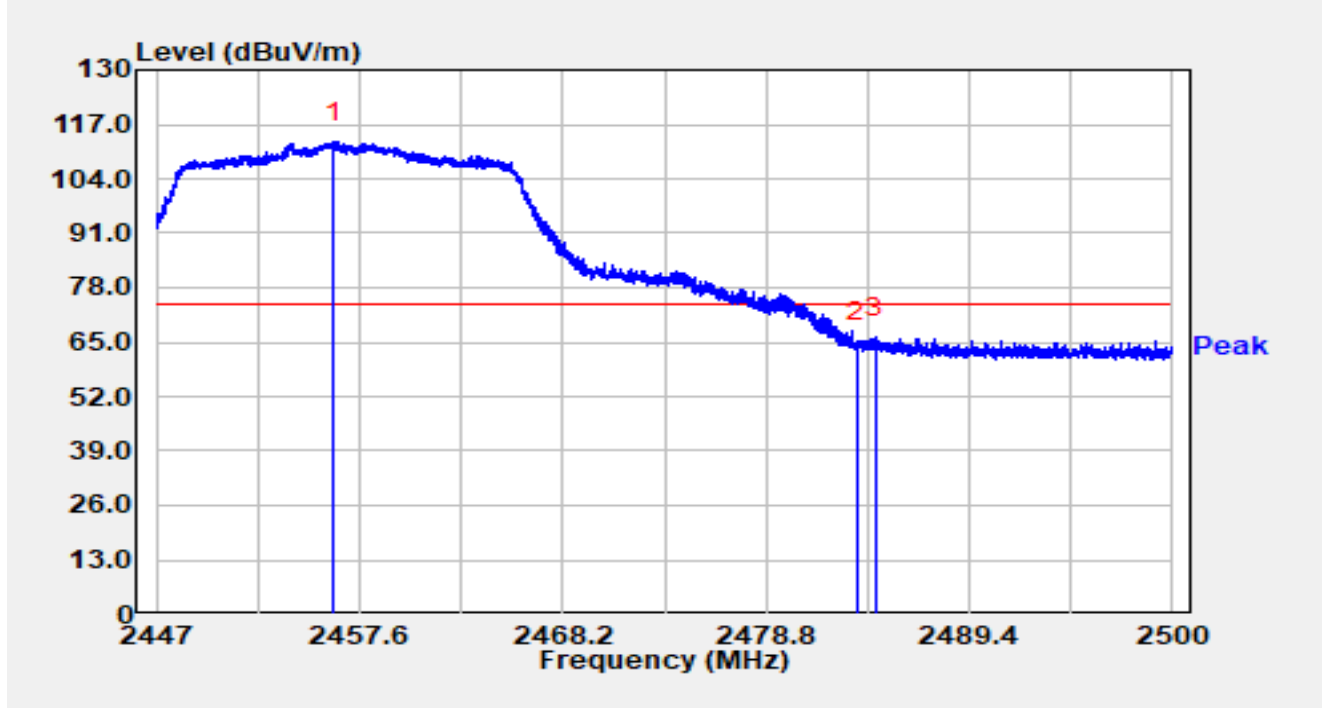


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2456.280	75.76	36.99	112.75	N/A	N/A	Peak
2		2483.500	27.77	37.05	64.82	-9.18	74.00	Peak
3	*	2484.529	29.03	37.06	66.09	-7.91	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2457MHz		

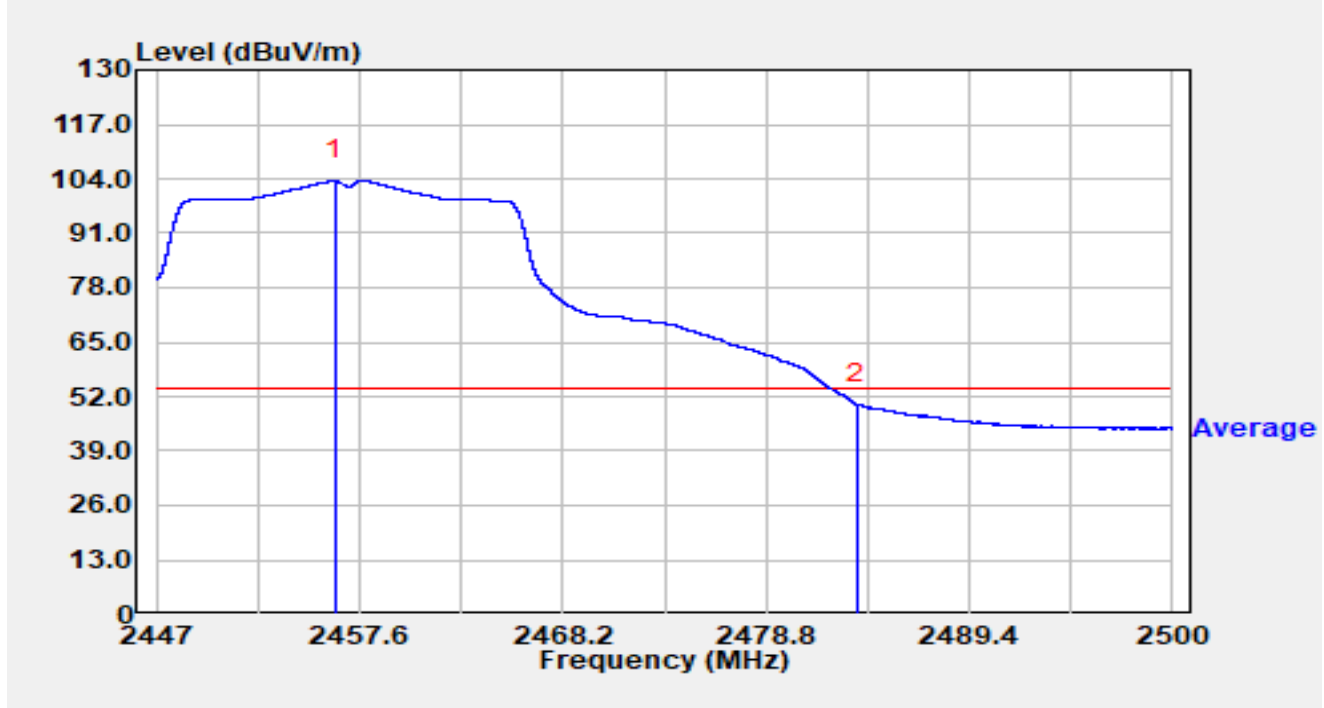


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2456.307	66.57	36.99	103.56	N/A	N/A	Average
2	*	2483.500	13.20	37.05	50.26	-3.74	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2457MHz		

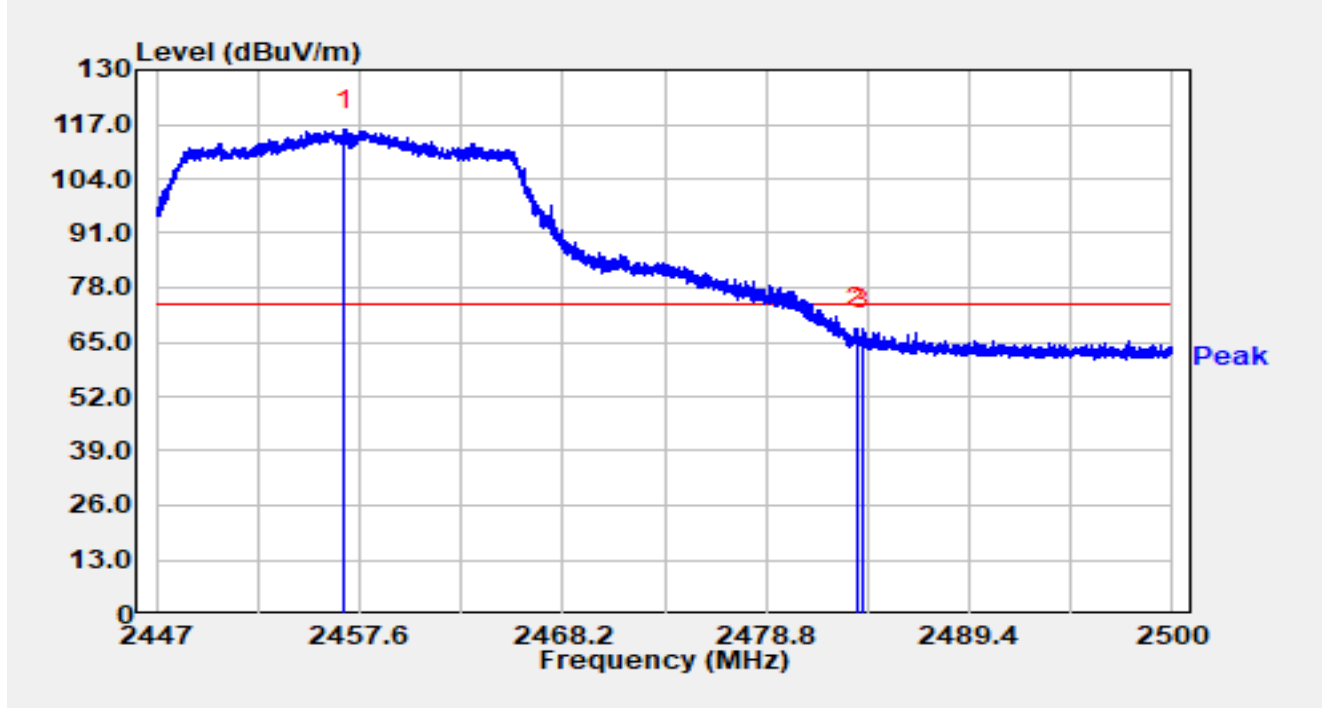


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2456.800	78.66	36.99	115.66	N/A	N/A	Peak
2	*	2483.500	31.19	37.05	68.24	-5.76	74.00	Peak
3		2483.787	31.07	37.05	68.12	-5.88	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2457MHz		

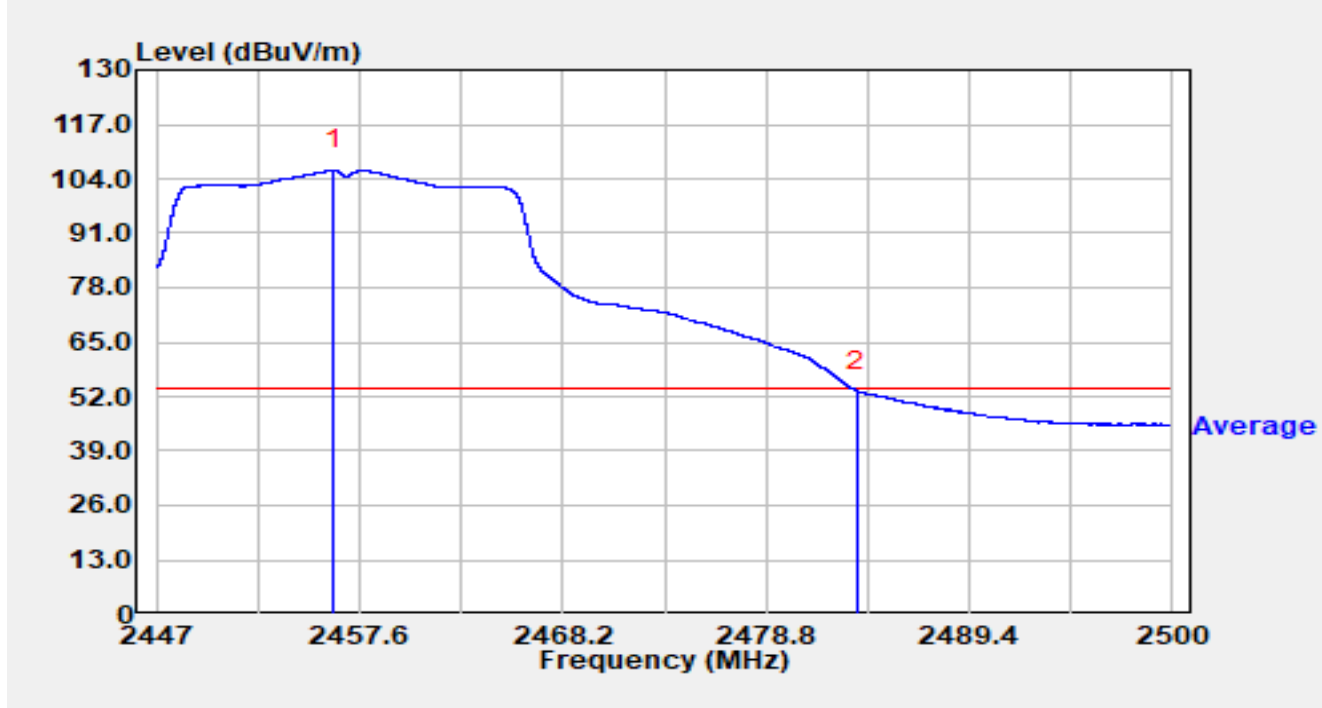


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2456.227	69.07	36.99	106.06	N/A	N/A	Average
2	*	2483.500	16.33	37.05	53.39	-0.61	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

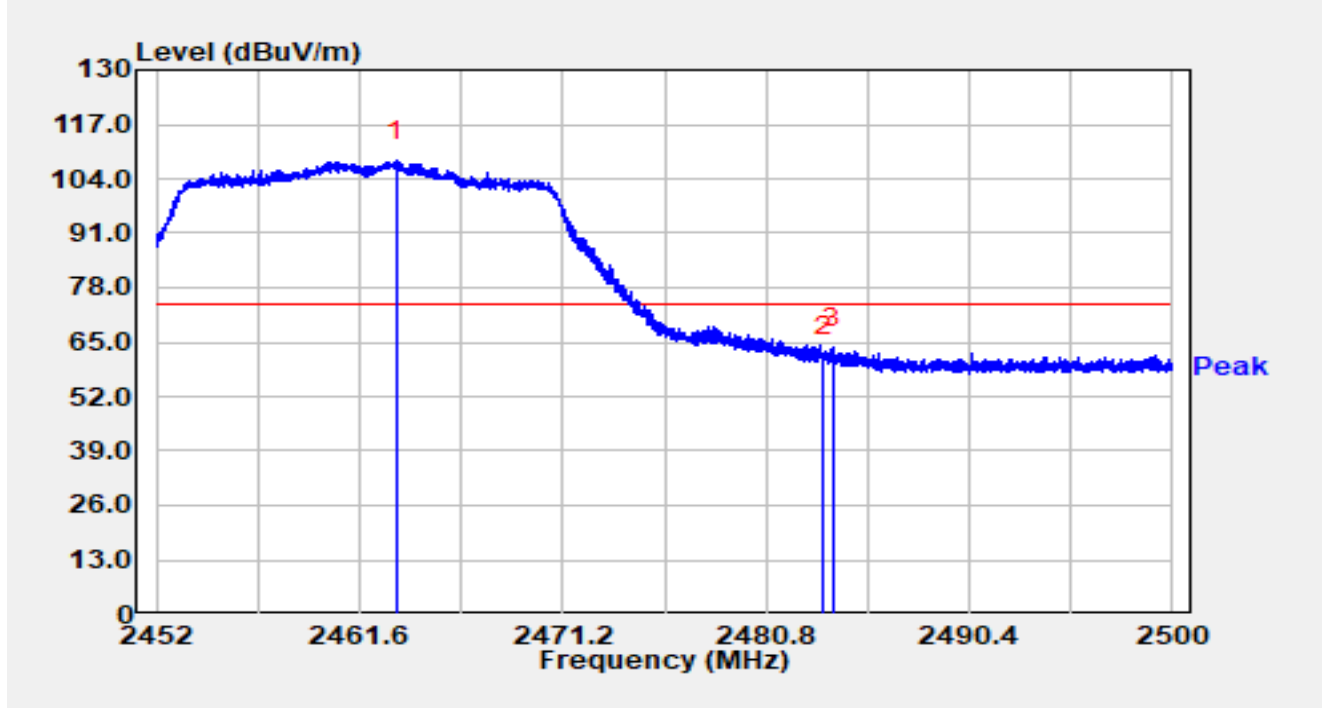


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2463.309	71.18	37.00	108.18	N/A	N/A	Peak
2		2483.500	24.28	37.05	61.33	-12.67	74.00	Peak
3	*	2483.930	26.53	37.05	63.58	-10.42	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

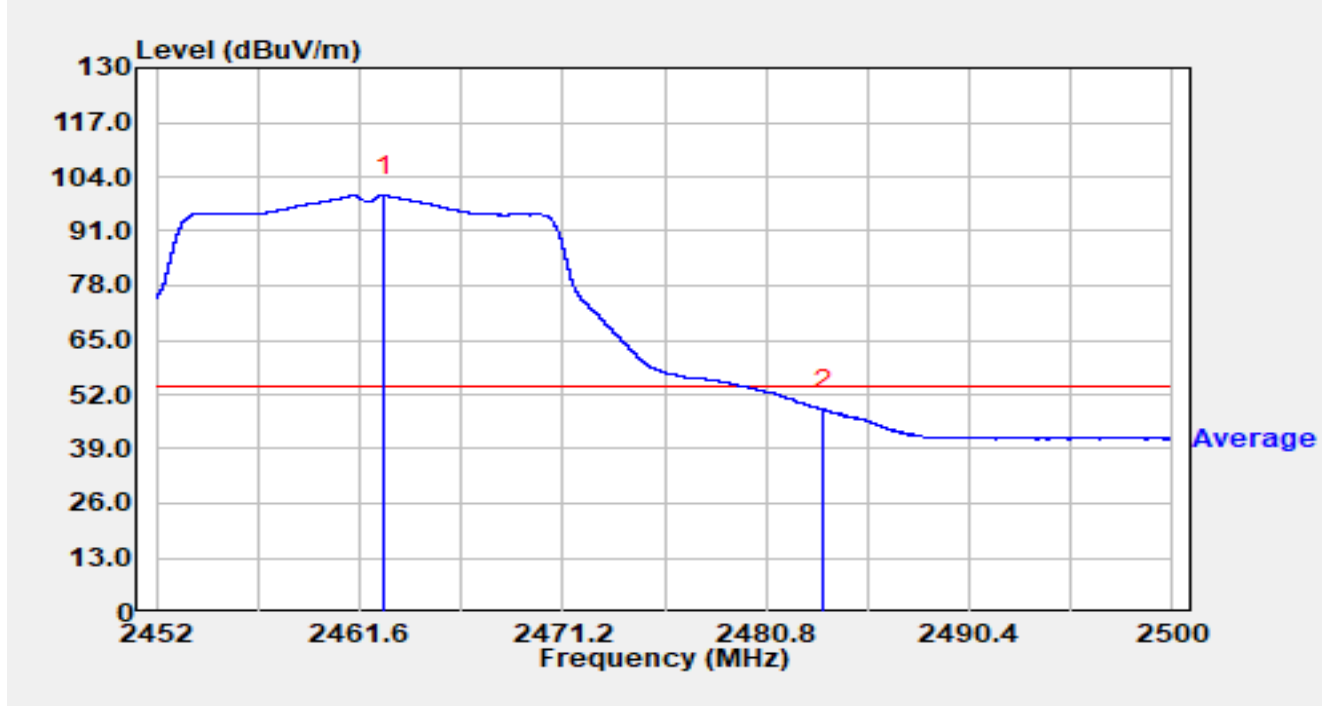


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.742	62.50	37.00	99.50	N/A	N/A	Average
2	*	2483.500	11.40	37.05	48.45	-5.55	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

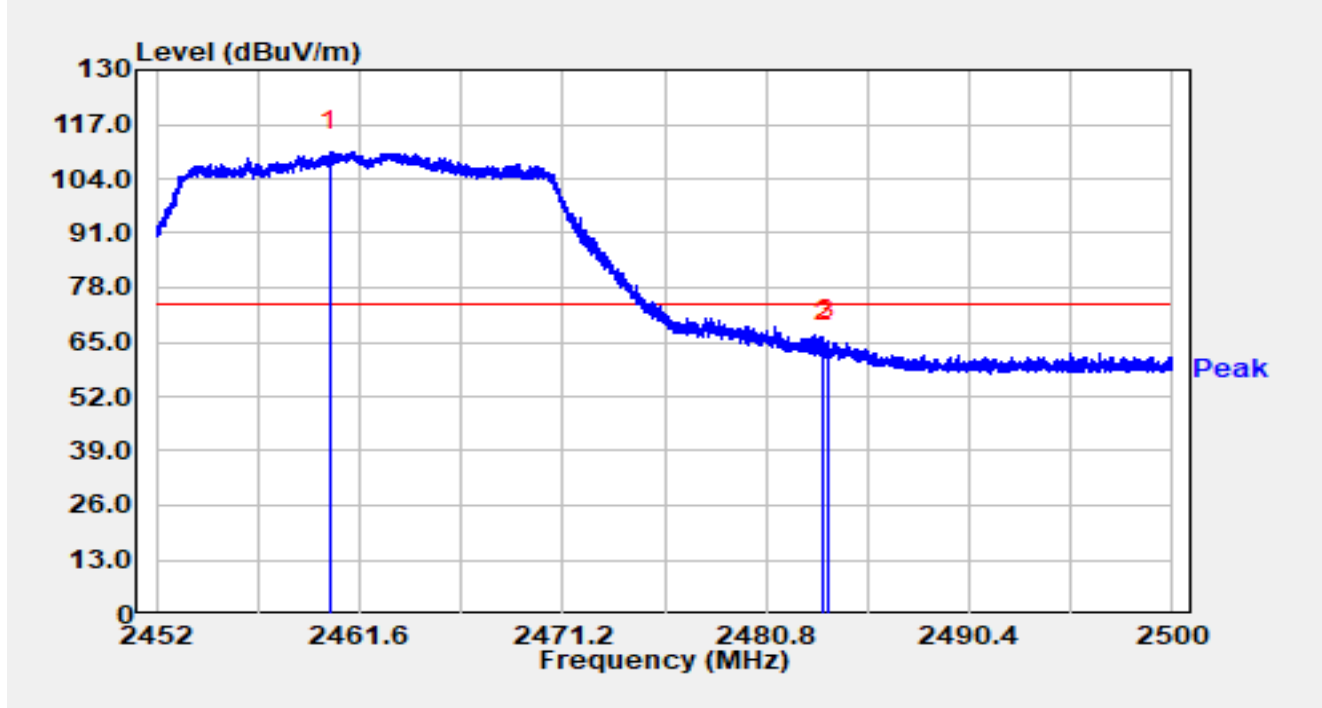


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2460.198	73.41	37.00	110.41	N/A	N/A	Peak
2		2483.500	27.73	37.05	64.78	-9.22	74.00	Peak
3	*	2483.675	28.30	37.05	65.35	-8.65	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

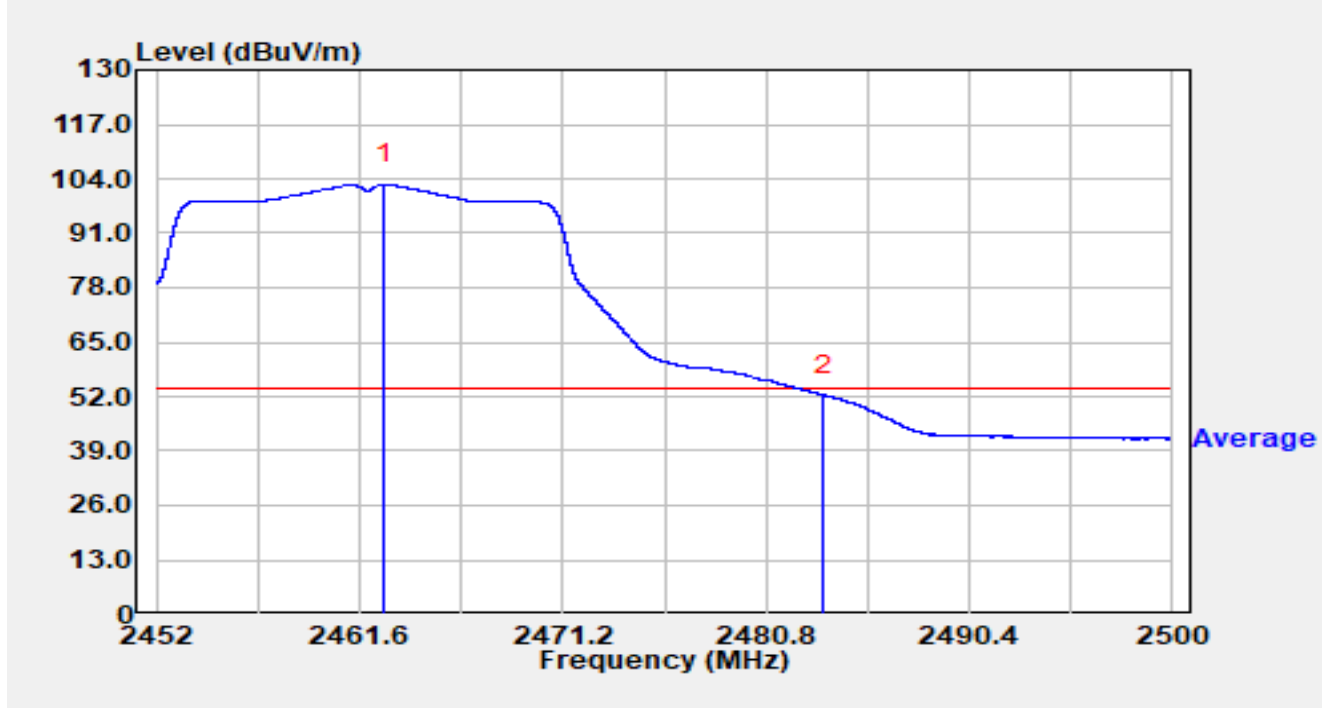


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.747	65.61	37.00	102.61	N/A	N/A	Average
2	*	2483.500	15.31	37.05	52.36	-1.64	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2422MHz		

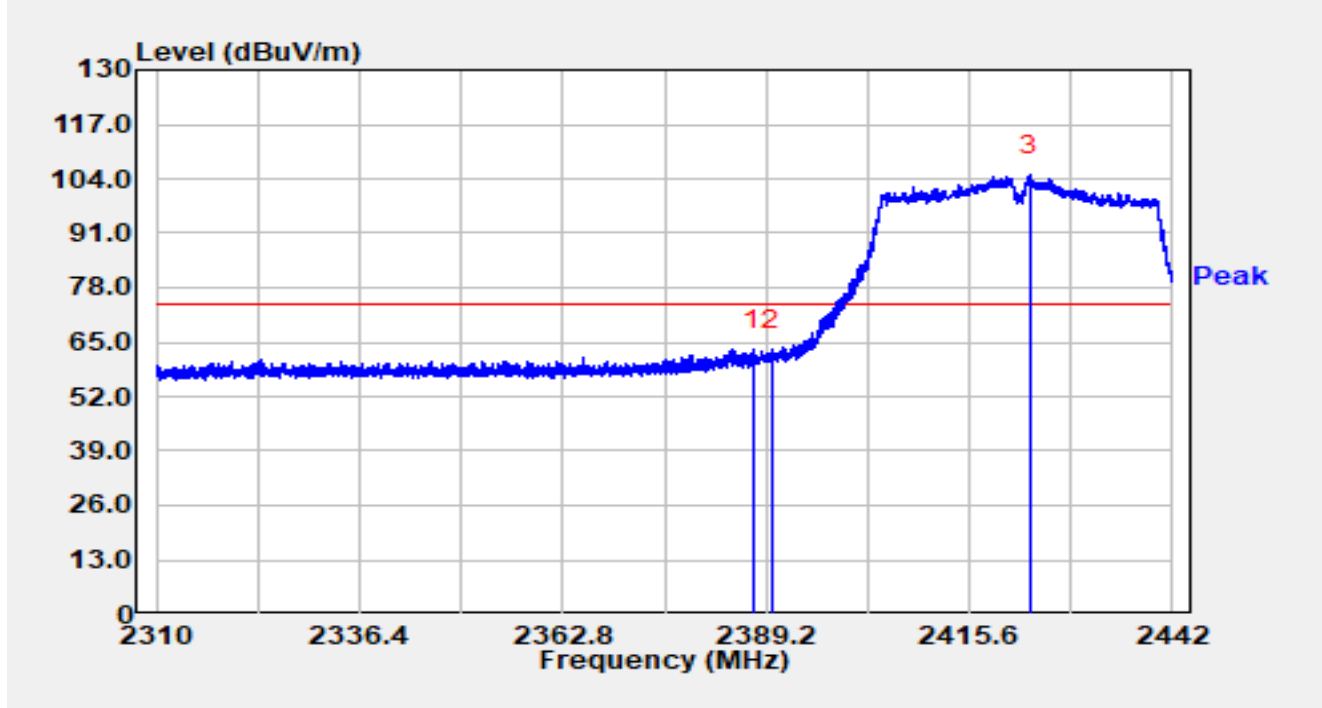


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.524	26.44	36.82	63.26	-10.74	74.00	Peak
2		2390.000	26.38	36.83	63.21	-10.79	74.00	Peak
3		2423.507	67.77	37.00	104.77	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2422MHz		

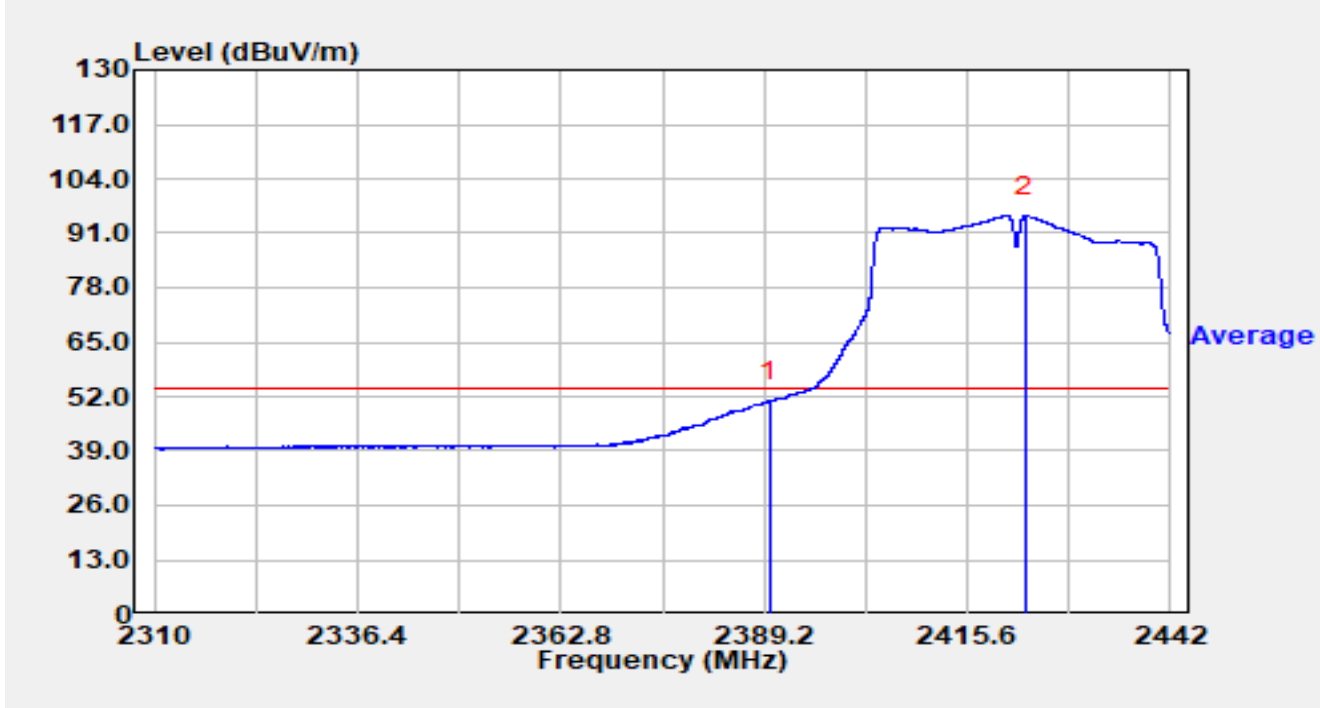


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	14.11	36.83	50.94	-3.06	54.00	Average
2		2423.190	58.16	37.00	95.17	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2422MHz		

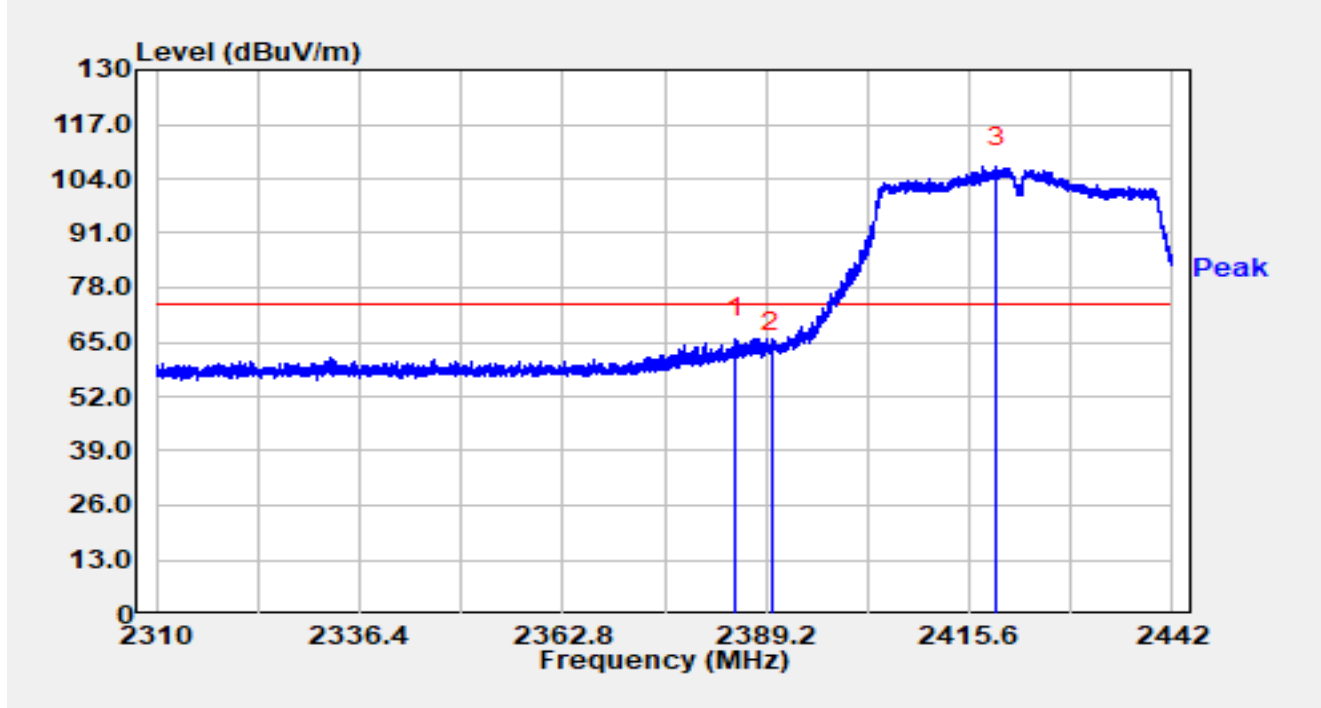


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2385.333	28.98	36.81	65.79	-8.21	74.00	Peak
2		2390.000	25.53	36.83	62.36	-11.64	74.00	Peak
3		2419.164	69.81	37.00	106.81	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-05
Temperature	20.5 °C	Humidity	35.8 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2422MHz		

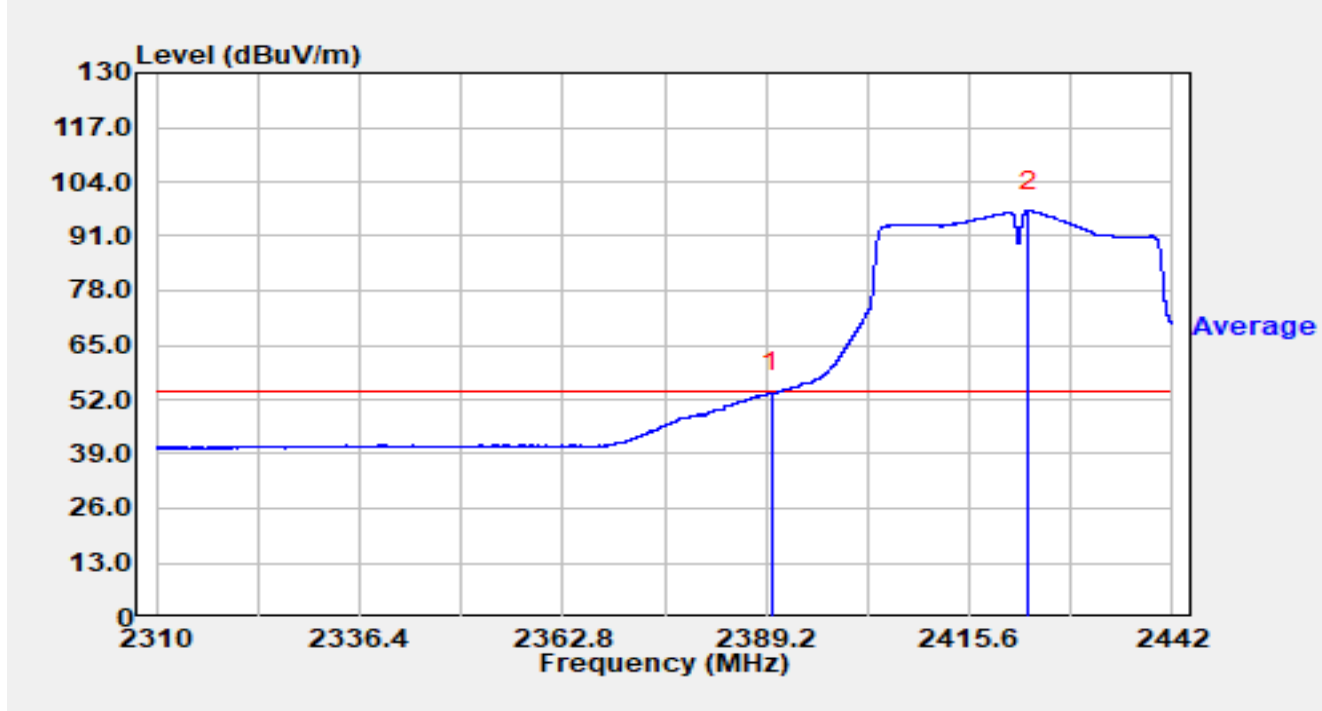


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	16.72	36.83	53.55	-0.45	54.00	Average
2		2423.243	60.03	37.00	97.04	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2427MHz		

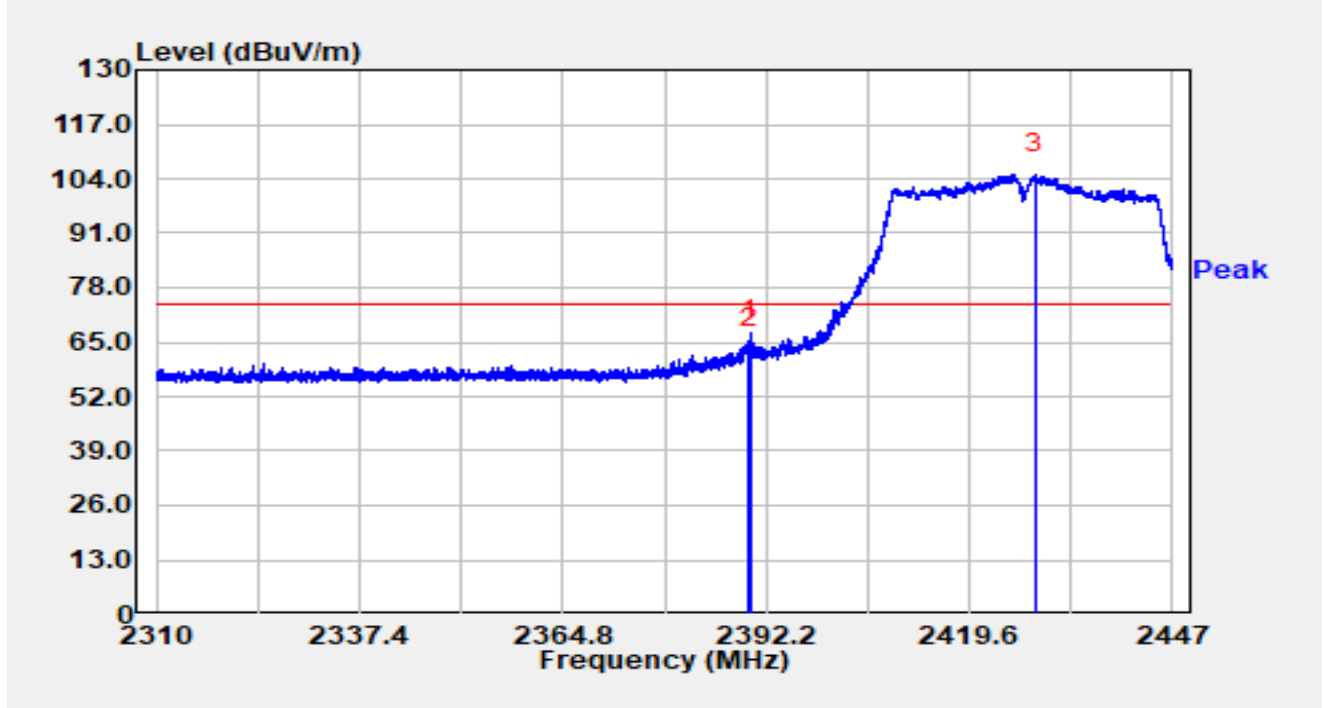


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.885	35.68	29.59	65.27	-8.73	74.00	Peak
2		2390.000	34.02	29.59	63.61	-10.39	74.00	Peak
3		2428.478	75.43	29.65	105.09	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2427MHz		

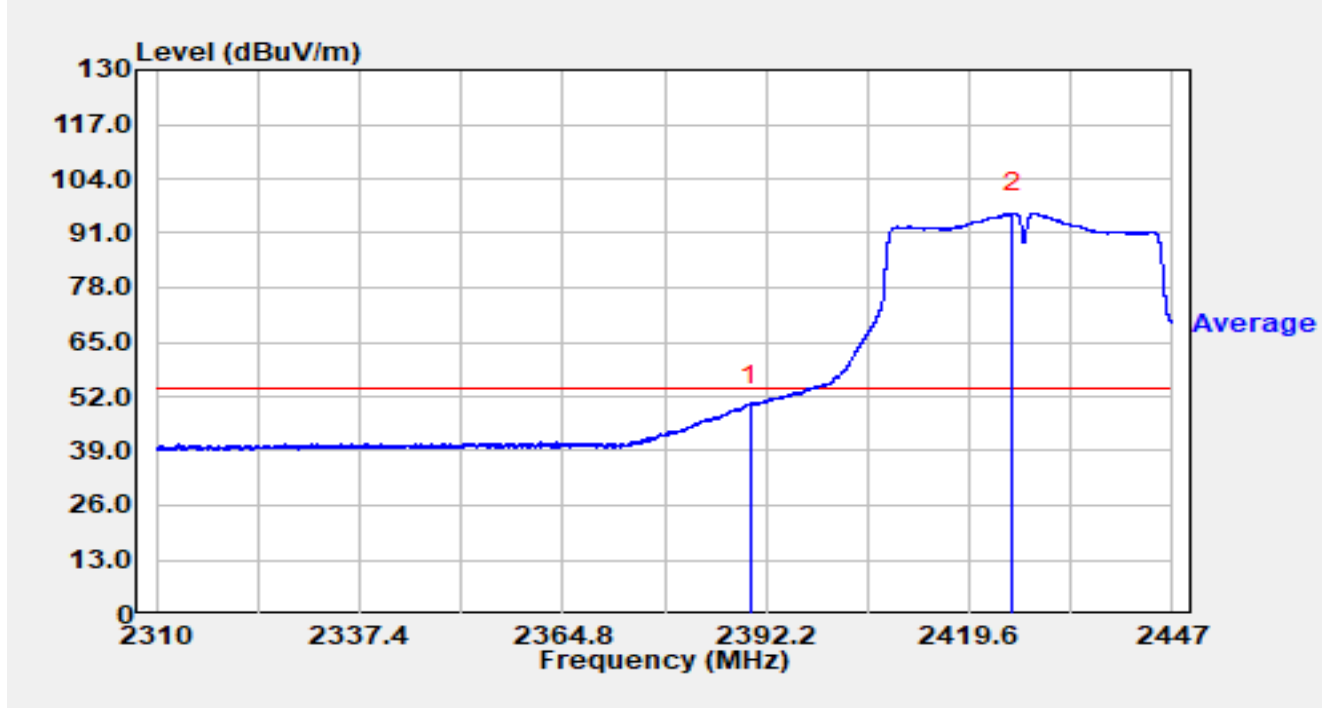


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	20.43	29.59	50.02	-3.98	54.00	Average
2		2425.436	66.25	29.64	95.90	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2427MHz		

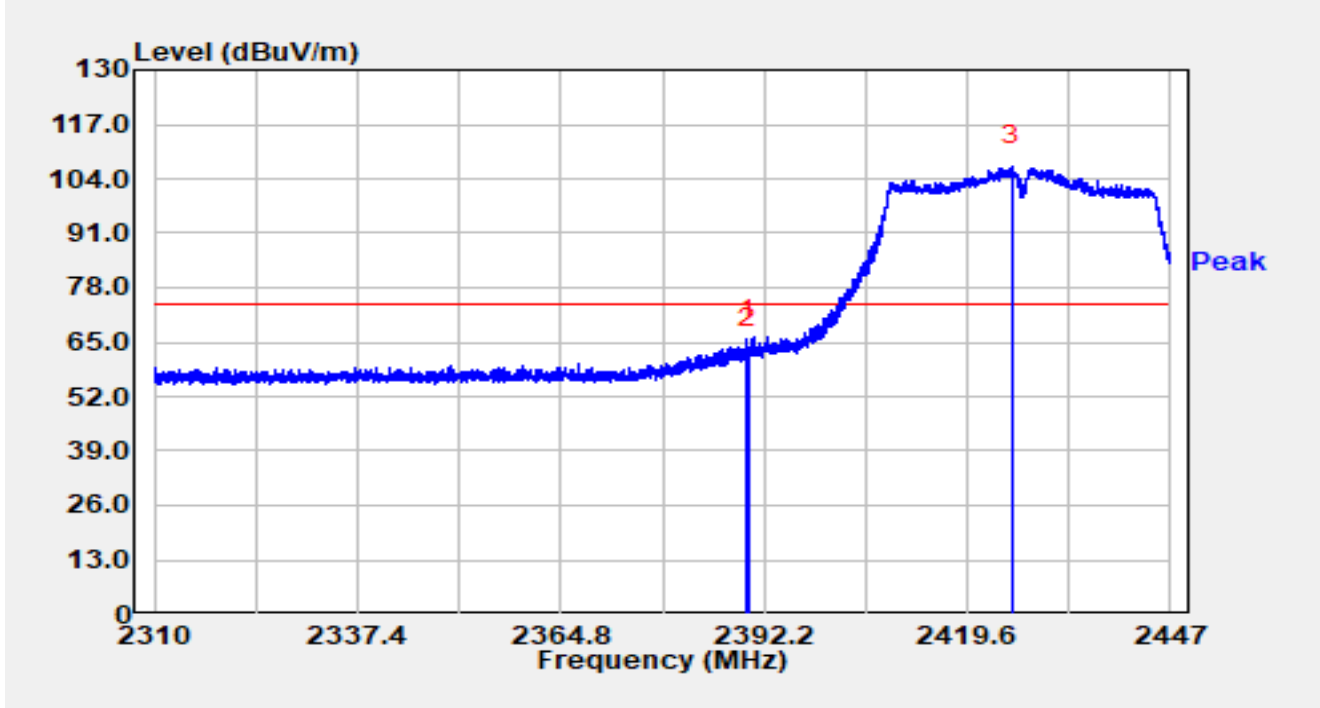


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.939	36.03	29.59	65.62	-8.38	74.00	Peak
2		2390.000	33.89	29.59	63.49	-10.51	74.00	Peak
3		2425.573	77.32	29.64	106.96	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2427MHz		

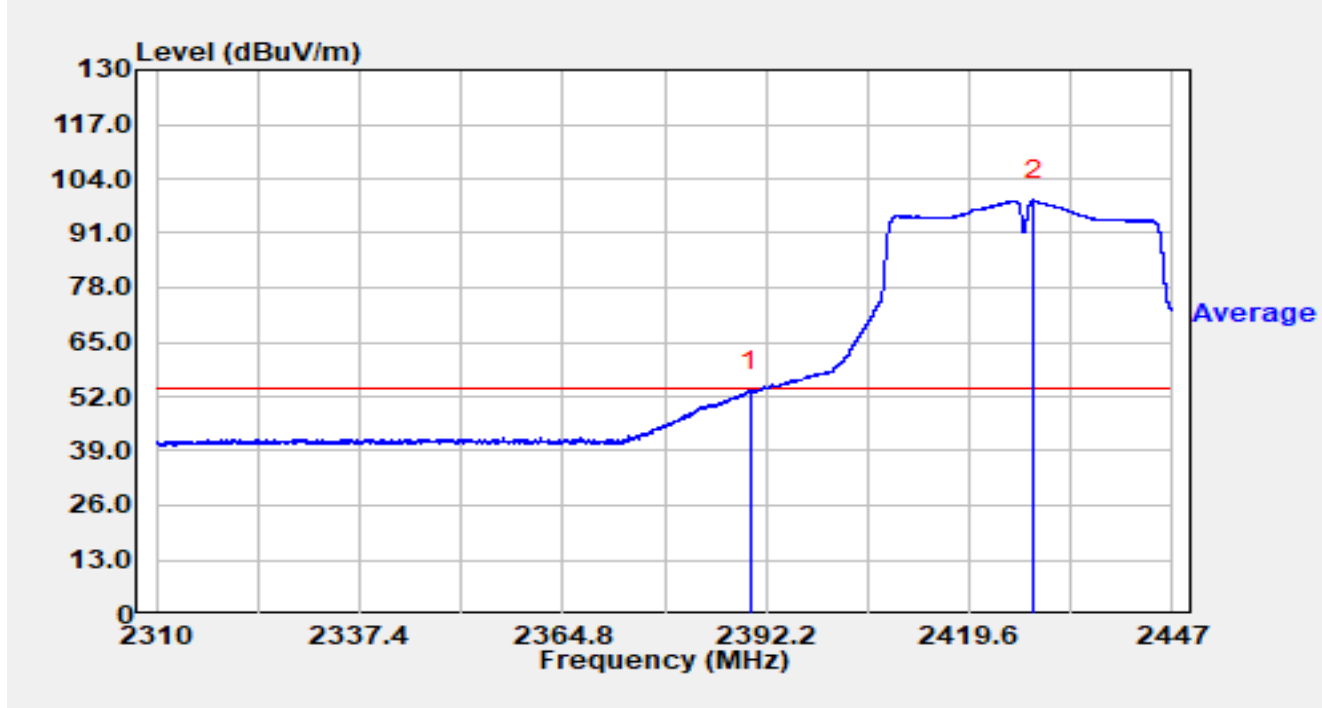


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	2390.000	23.49	29.59	53.08	-0.92	54.00	Average
2		2428.245	69.21	29.65	98.86	N/A	N/A	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-06
Temperature	21.9 °C	Humidity	39.4 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2437MHz		

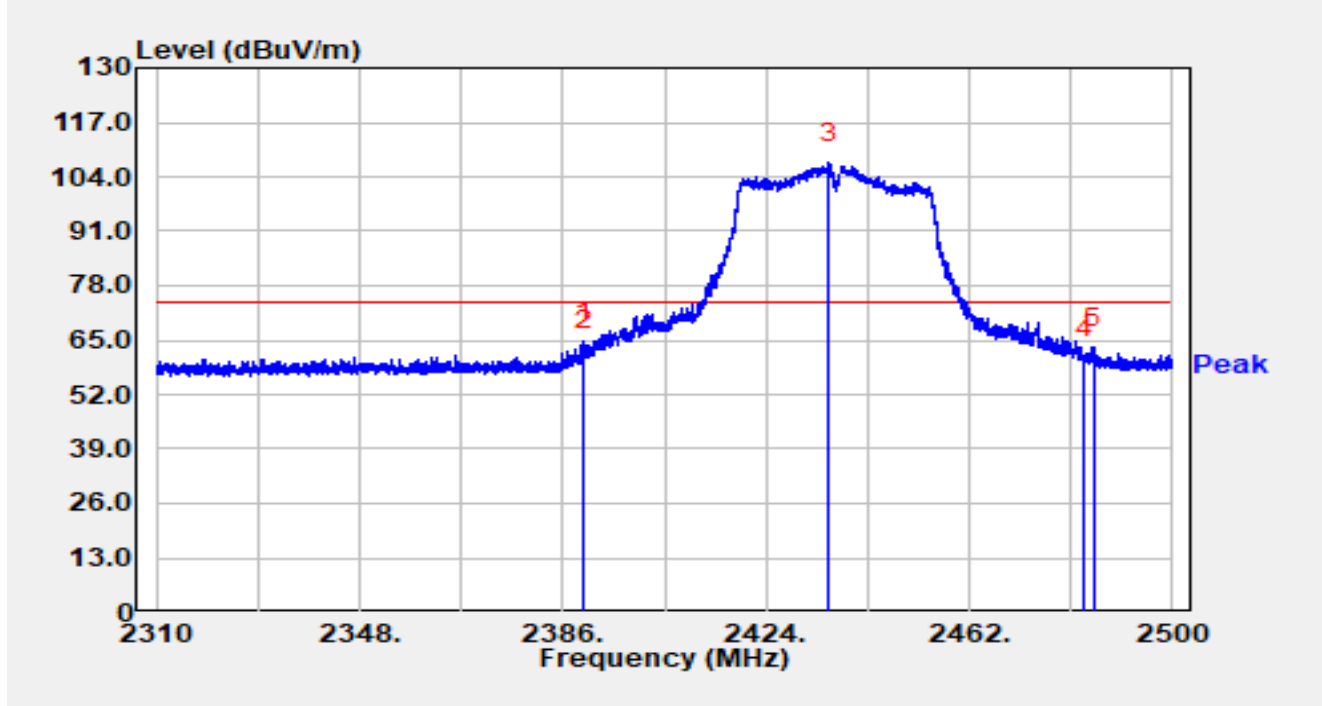


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.895	27.77	36.83	64.60	-9.40	74.00	Peak
2		2390.000	25.89	36.83	62.73	-11.27	74.00	Peak
3		2435.742	70.25	36.99	107.25	N/A	N/A	Peak
4		2483.500	23.47	37.05	60.53	-13.47	74.00	Peak
5		2485.332	26.17	37.06	63.23	-10.77	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-06
Temperature	21.9 °C	Humidity	39.4 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2437MHz		

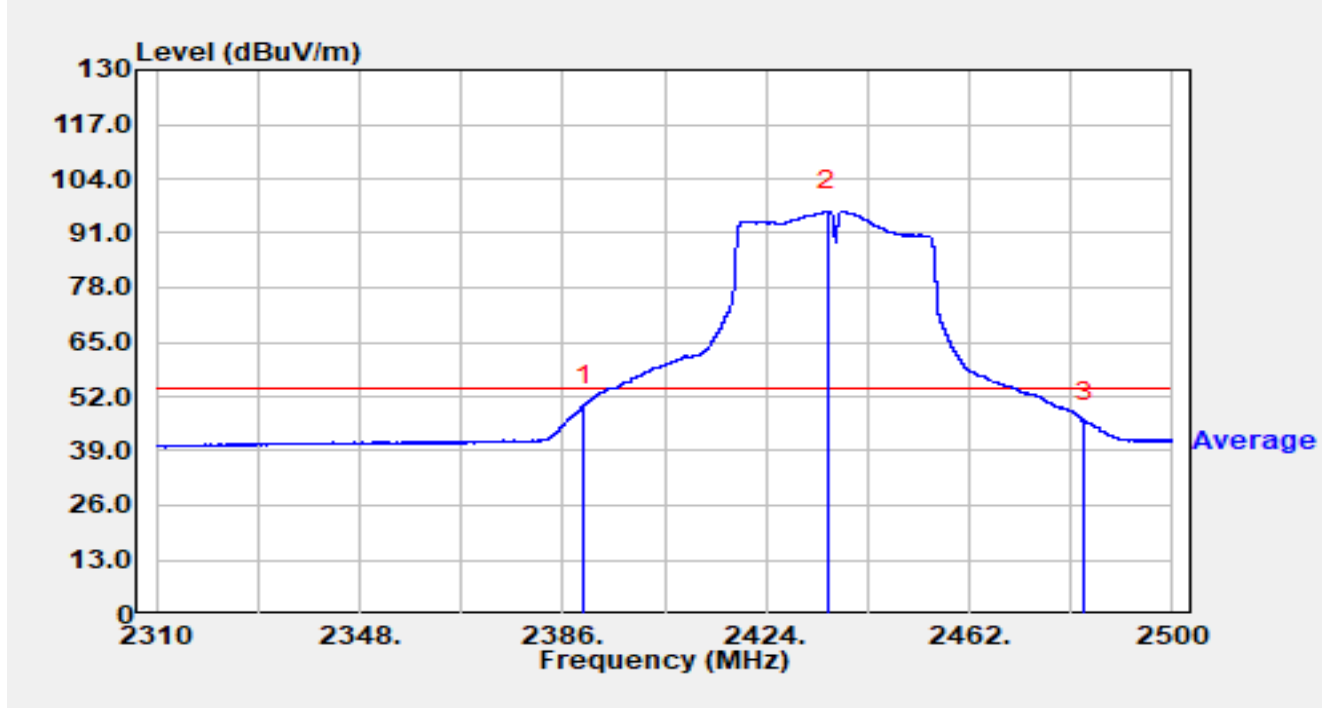


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	13.03	36.83	49.86	-4.14	54.00	Average
2		2435.609	59.40	36.99	96.39	N/A	N/A	Average
3		2483.500	9.02	37.05	46.07	-7.93	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-06
Temperature	21.9 °C	Humidity	39.4 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2437MHz		

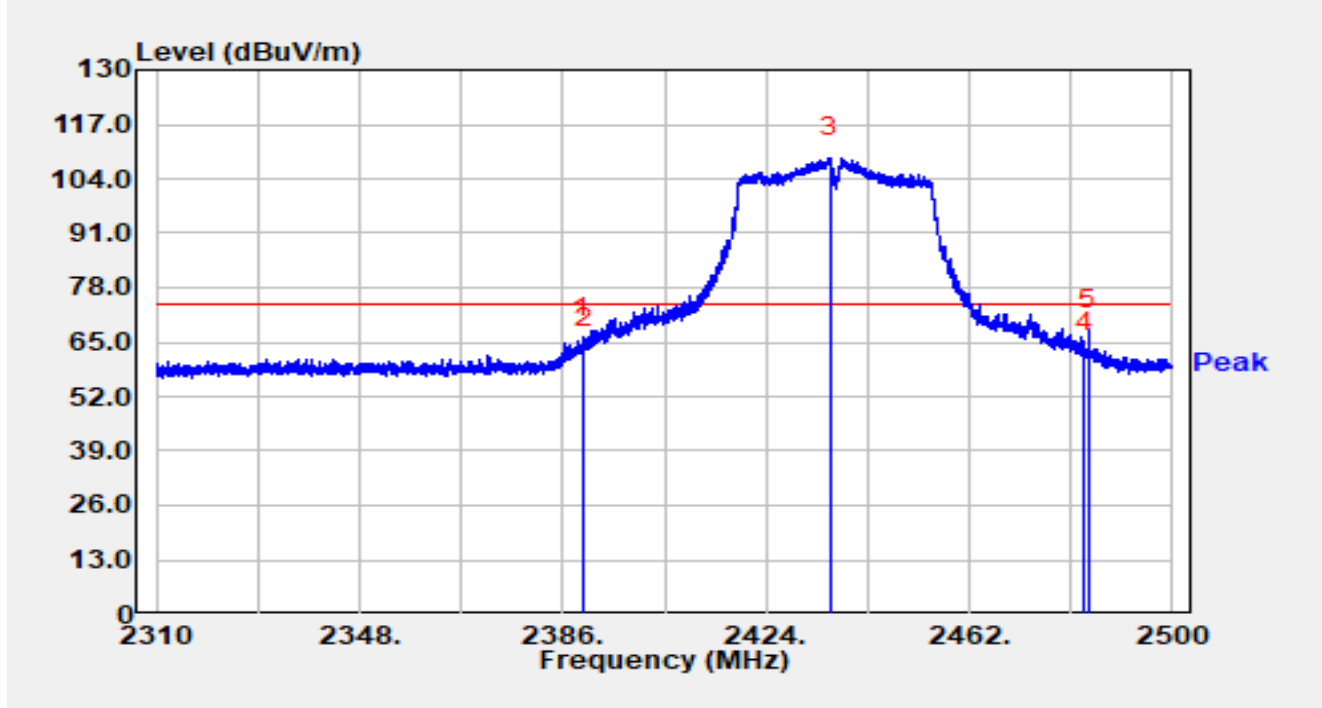


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2389.781	29.19	36.83	66.02	-7.98	74.00	Peak
2		2390.000	26.73	36.83	63.56	-10.44	74.00	Peak
3		2435.932	71.97	36.99	108.96	N/A	N/A	Peak
4		2483.500	25.31	37.05	62.36	-11.64	74.00	Peak
5	*	2484.230	31.11	37.05	68.17	-5.83	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-06
Temperature	21.9 °C	Humidity	39.4 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2437MHz		

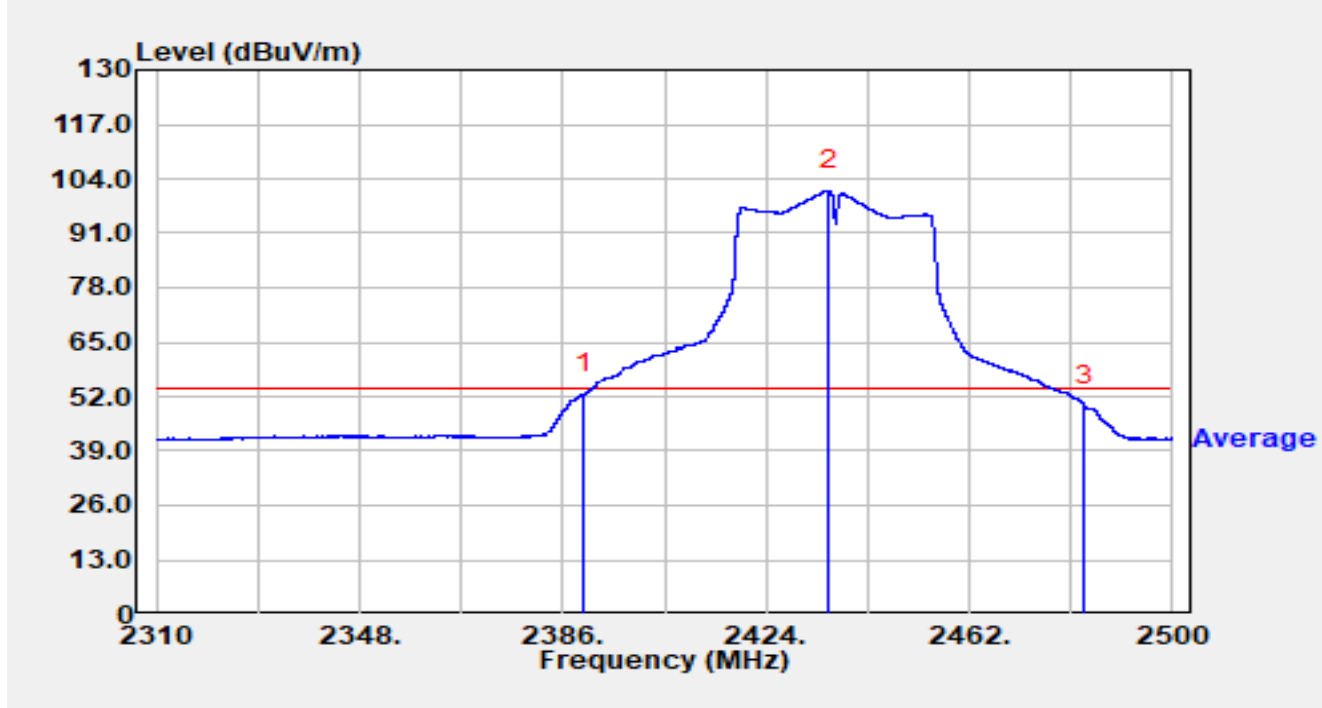


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	15.78	36.83	52.62	-1.38	54.00	Average
2		2435.742	64.17	36.99	101.17	N/A	N/A	Average
3		2483.500	12.80	37.05	49.85	-4.15	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-06
Temperature	21.9 °C	Humidity	39.4 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

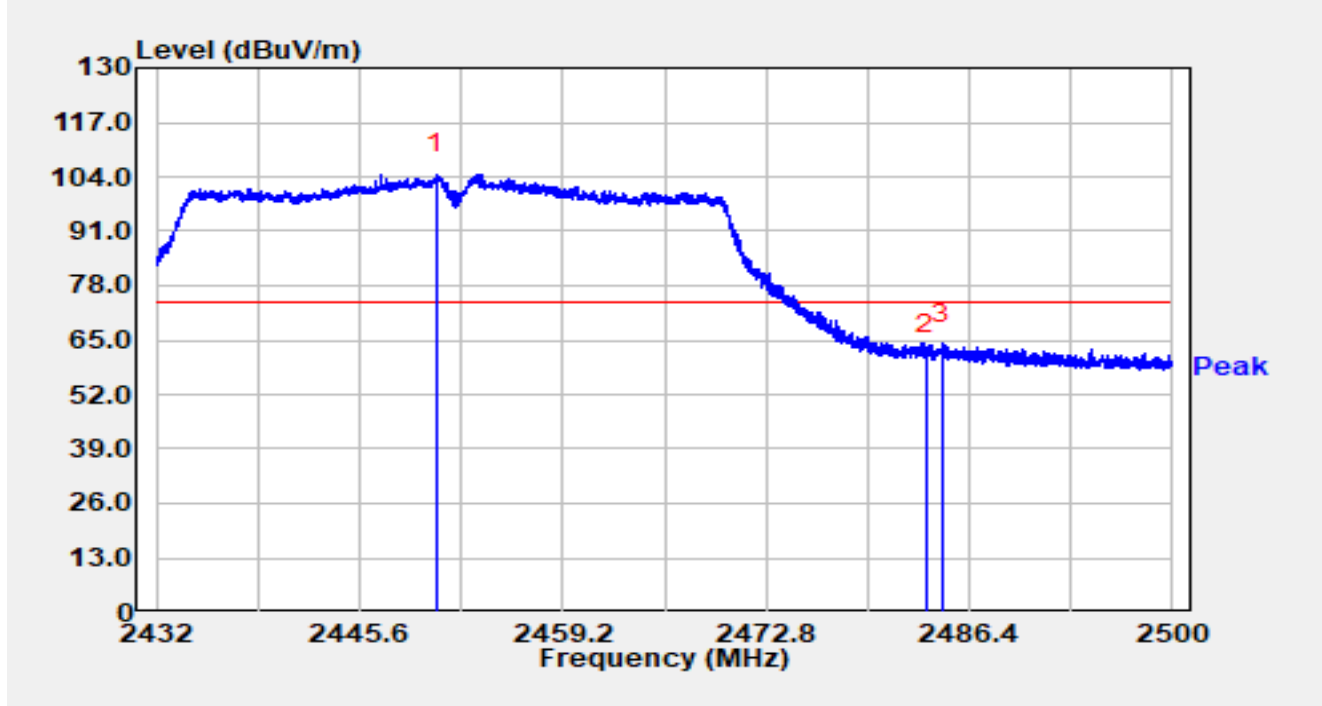


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2450.761	67.71	36.99	104.70	N/A	N/A	Peak
2		2483.500	24.72	37.05	61.77	-12.23	74.00	Peak
3	*	2484.571	26.96	37.06	64.02	-9.98	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-06
Temperature	21.9 °C	Humidity	39.4 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

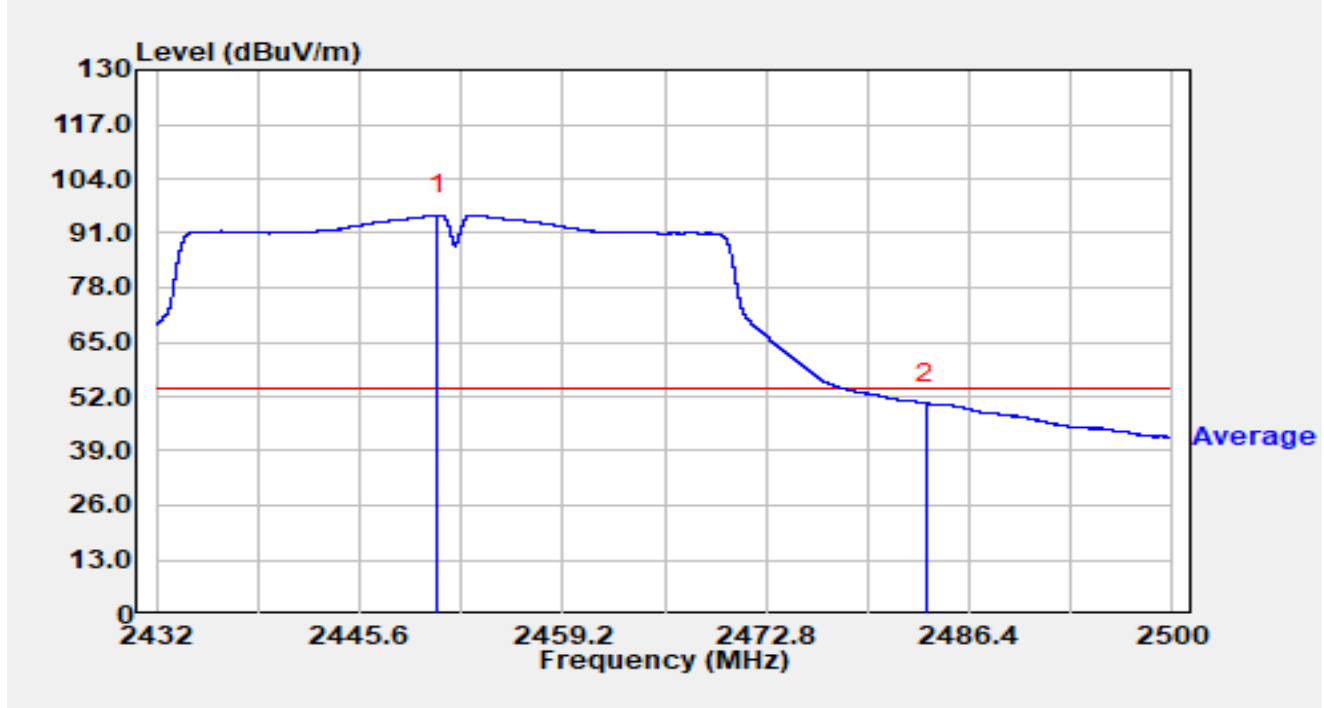


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2450.802	58.37	36.99	95.36	N/A	N/A	Average
2	*	2483.500	13.41	37.05	50.46	-3.54	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-06
Temperature	21.9 °C	Humidity	39.4 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

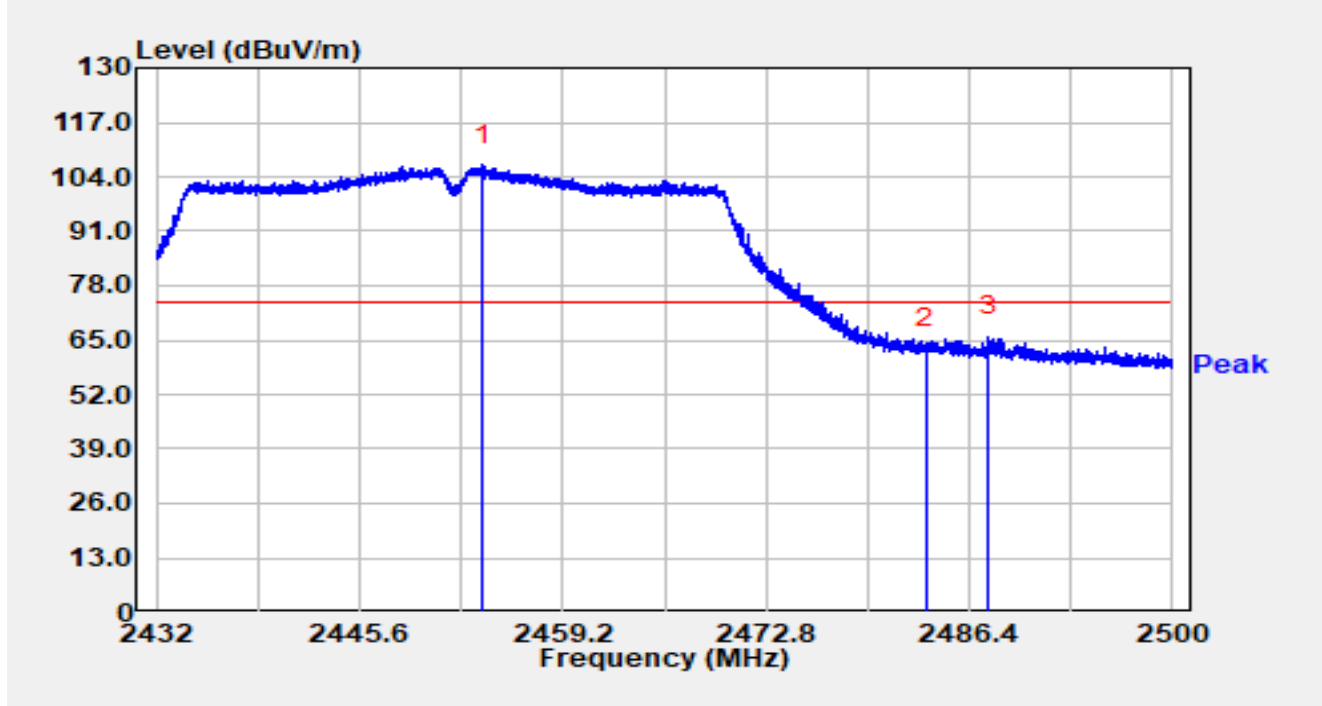


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2453.882	69.72	36.99	106.71	N/A	N/A	Peak
2		2483.500	26.01	37.05	63.06	-10.94	74.00	Peak
3	*	2487.665	28.75	37.06	65.81	-8.19	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-03-06
Temperature	21.9 °C	Humidity	39.4 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

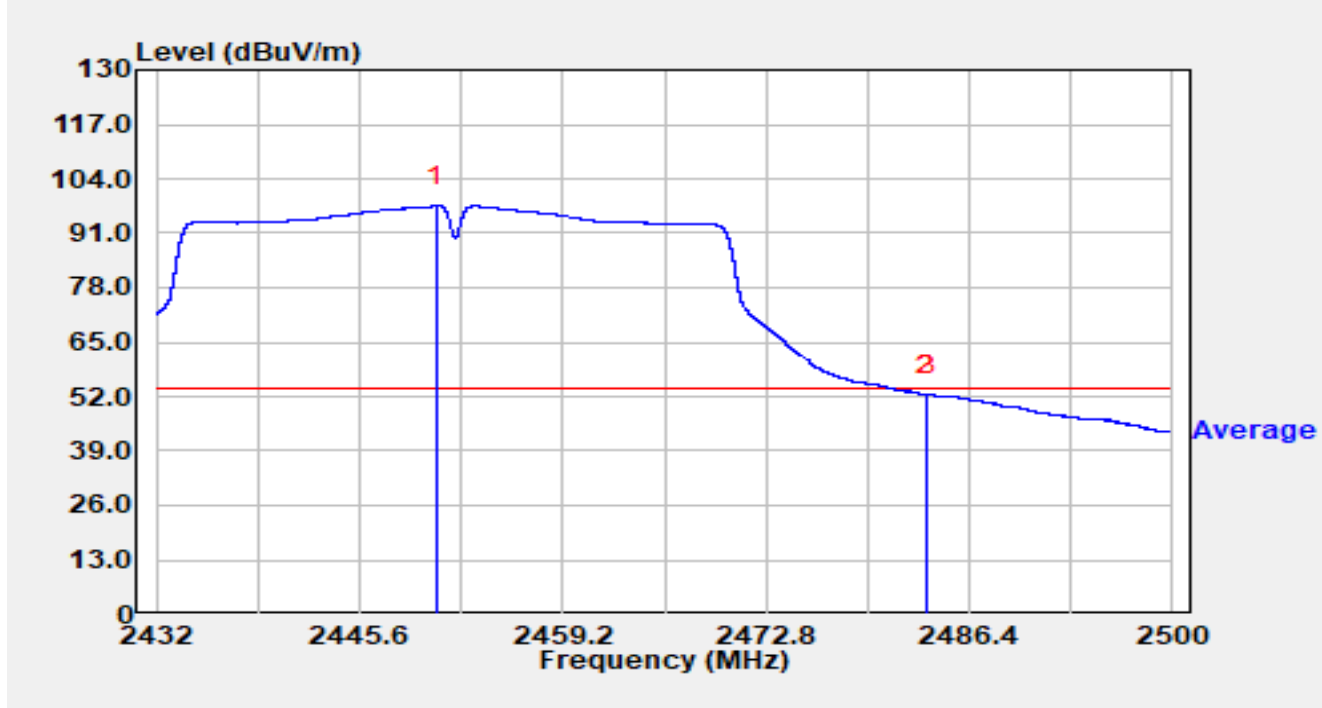


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2450.754	60.55	36.99	97.54	N/A	N/A	Average
2		2483.500	15.35	37.05	52.40	-1.60	54.00	Average
3	*	2483.551	15.36	37.05	52.42	-1.58	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz		

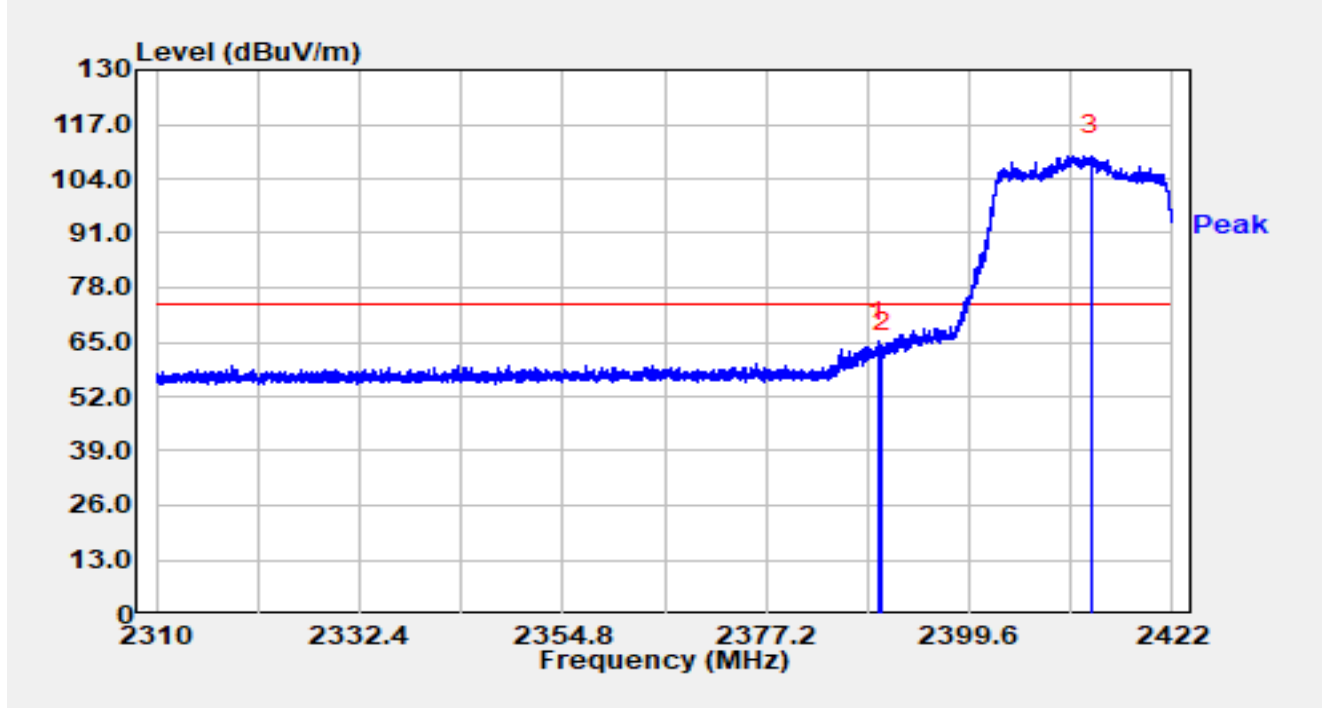


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.565	35.62	29.59	65.21	-8.79	74.00	Peak
2		2390.000	33.02	29.59	62.61	-11.39	74.00	Peak
3		2412.984	79.81	29.63	109.45	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz		

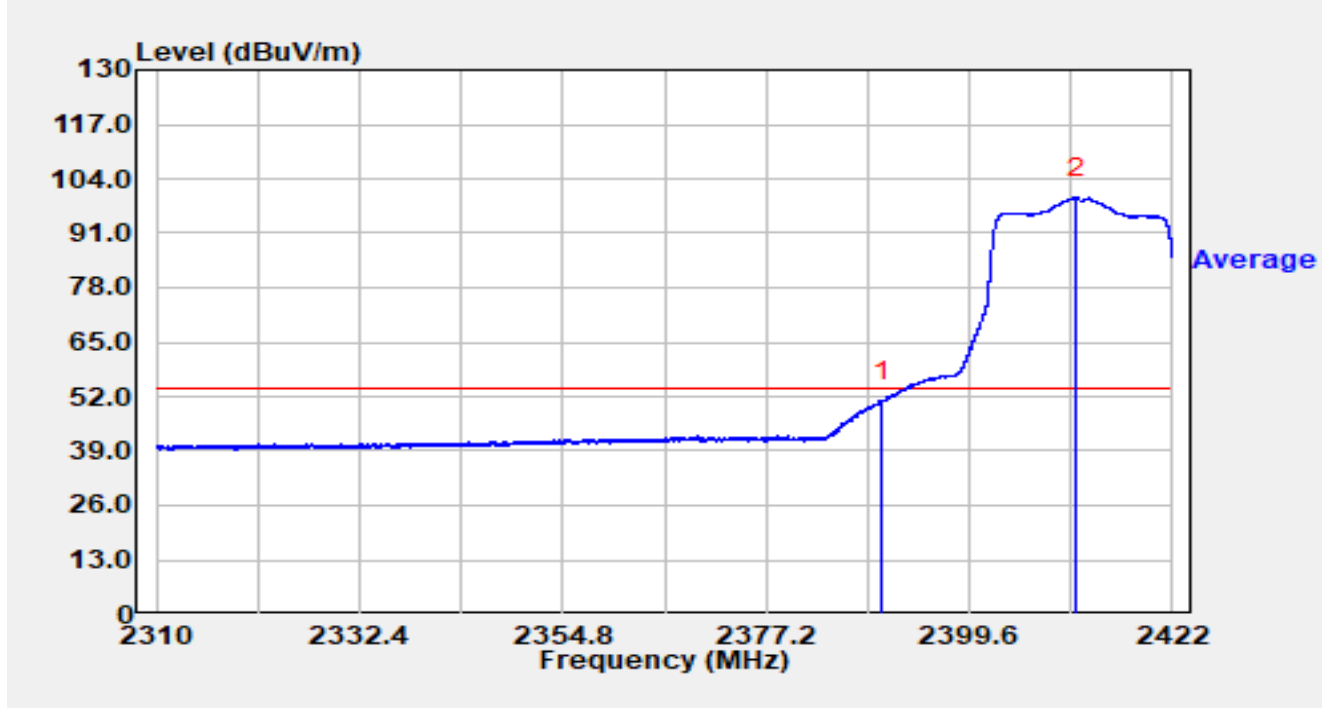


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	21.35	29.59	50.94	-3.06	54.00	Average
2		2411.371	69.84	29.63	99.48	N/A	N/A	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz		

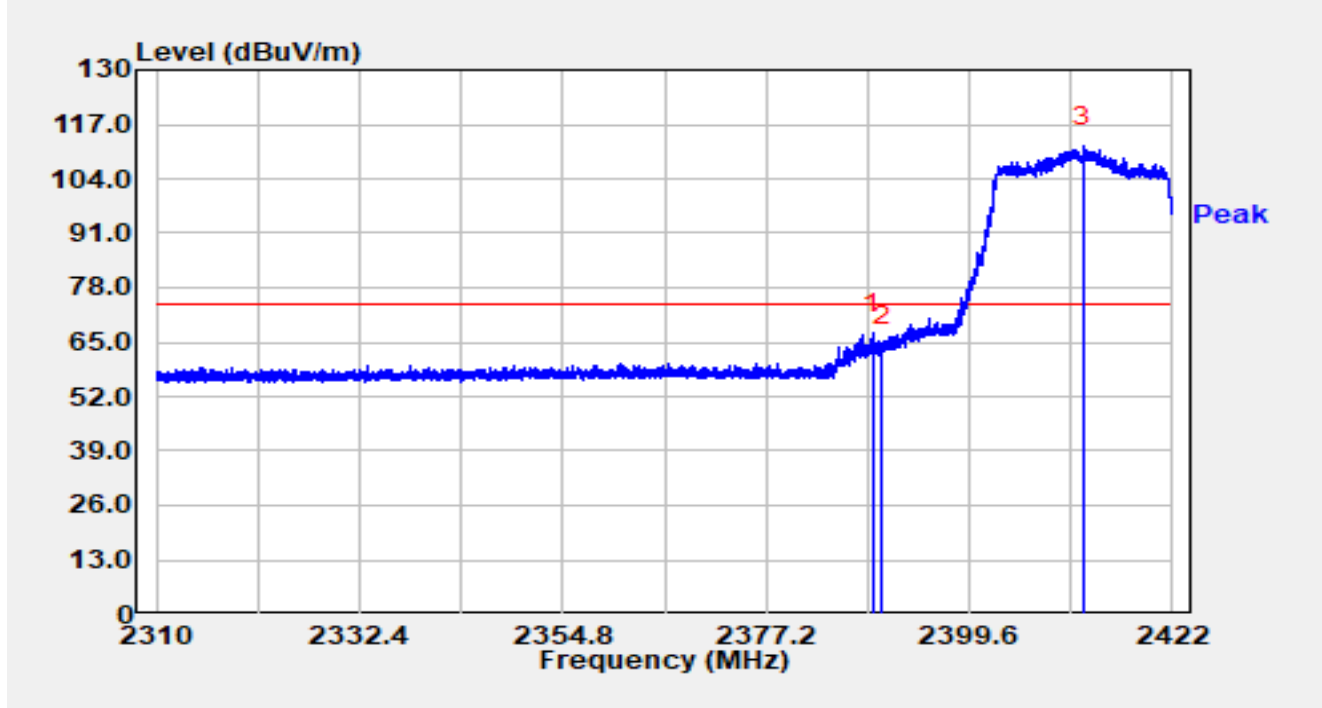


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.927	37.42	29.59	67.00	-7.00	74.00	Peak
2		2390.000	34.66	29.59	64.25	-9.75	74.00	Peak
3		2412.133	81.97	29.63	111.61	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz		

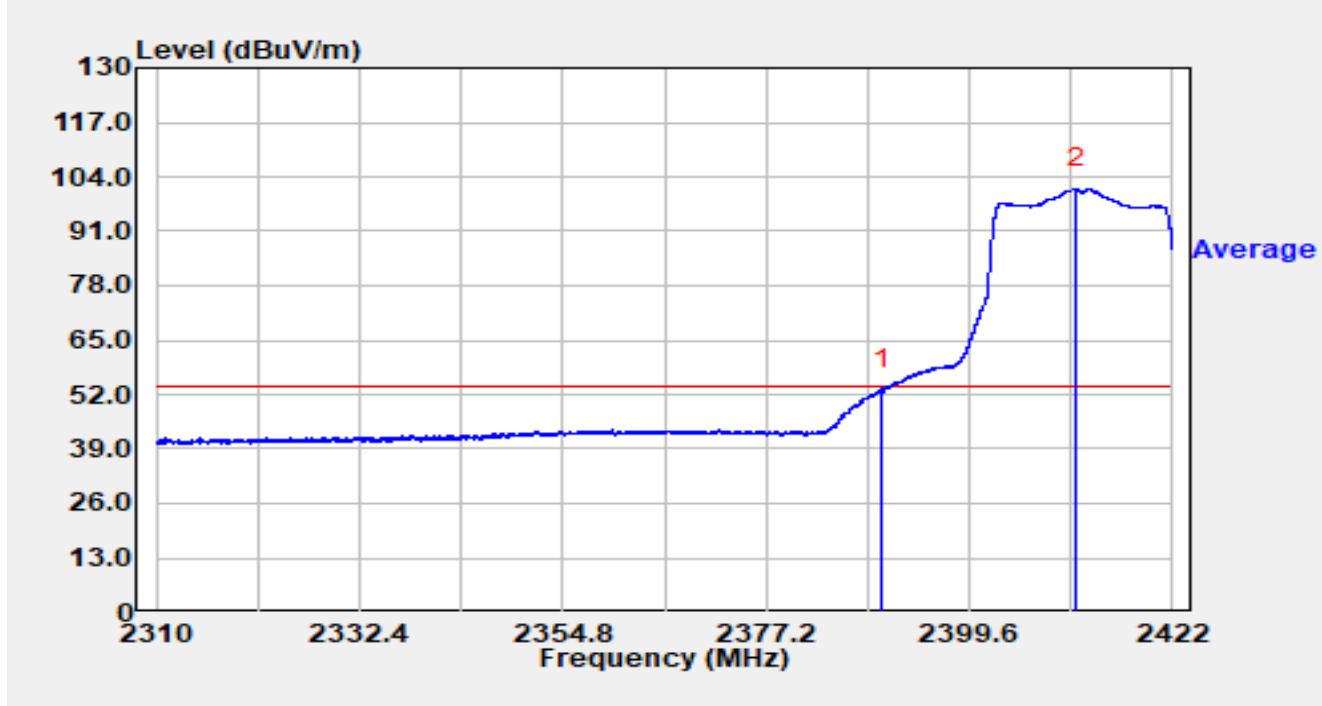


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	23.43	29.59	53.02	-0.98	54.00	Average
2		2411.394	71.52	29.63	101.16	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2417MHz		

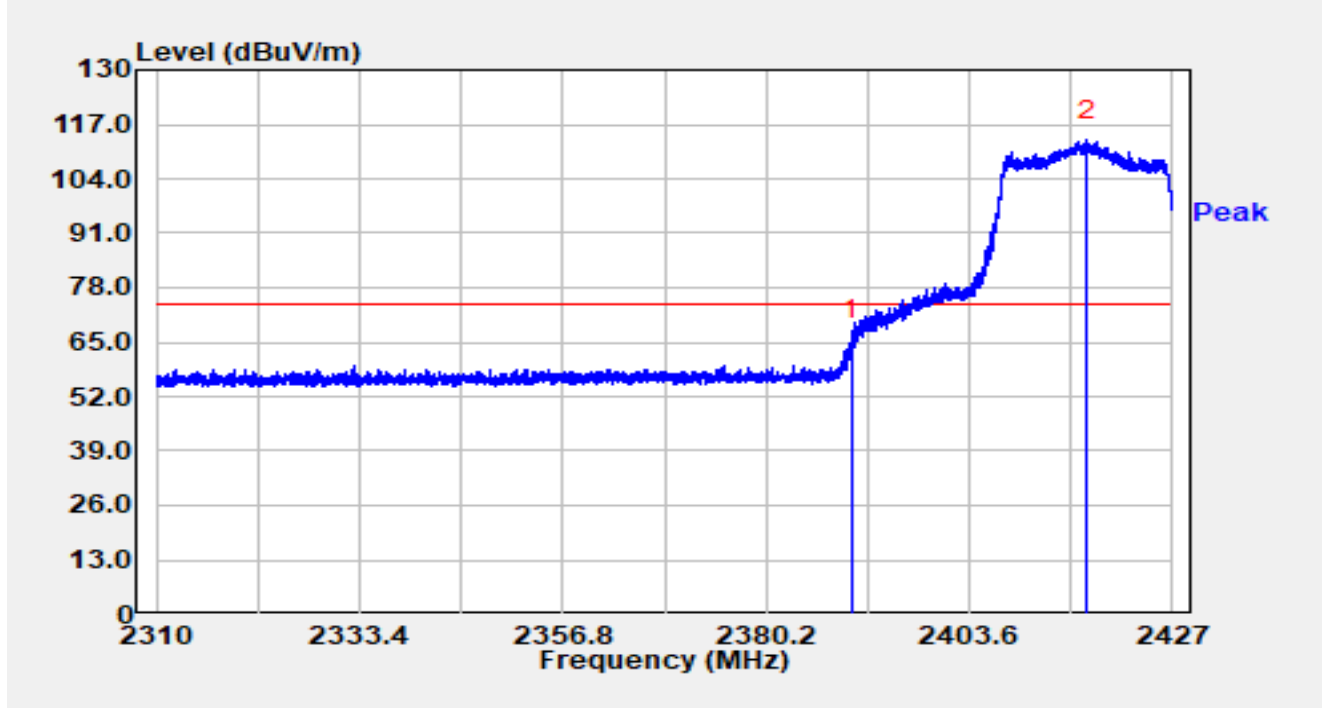


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.005	35.72	29.59	65.32	-8.68	74.00	Peak
2		2417.184	83.69	29.63	113.32	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2417MHz		

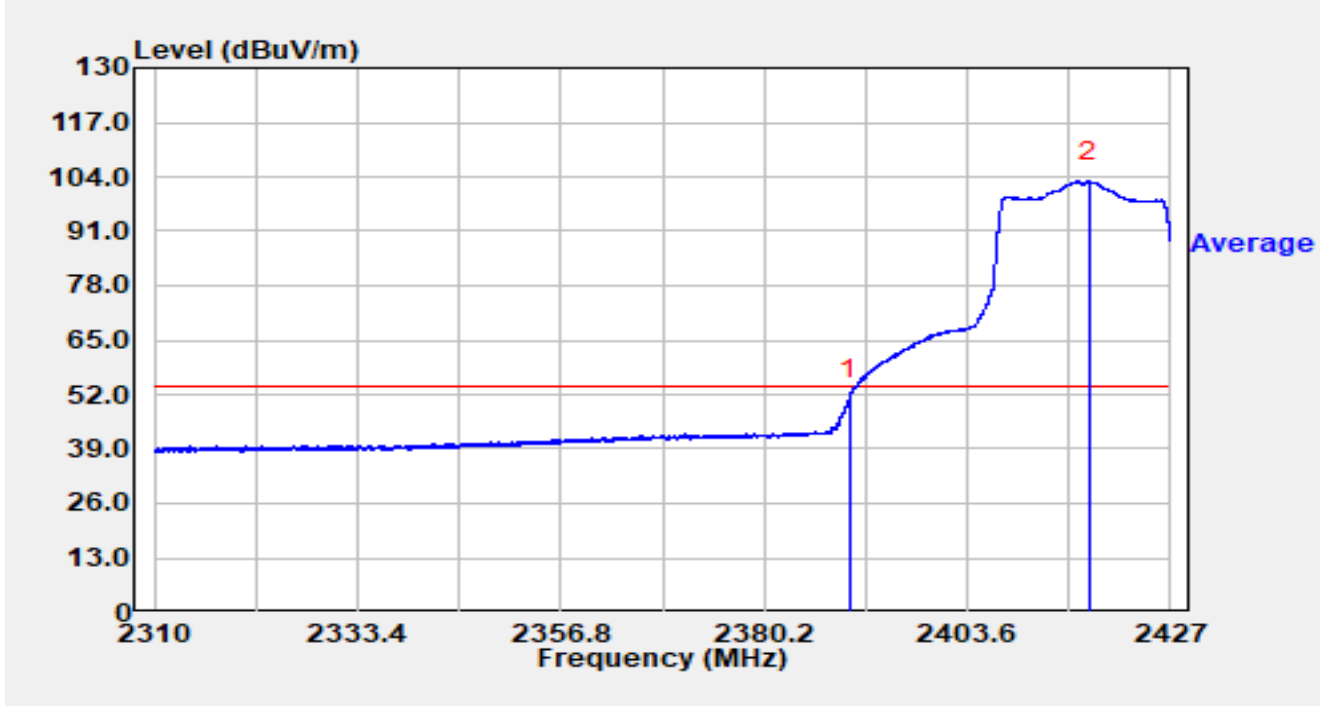


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.005	21.27	29.59	50.86	-3.14	54.00	Average
2		2417.640	73.32	29.63	102.95	N/A	N/A	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2417MHz		

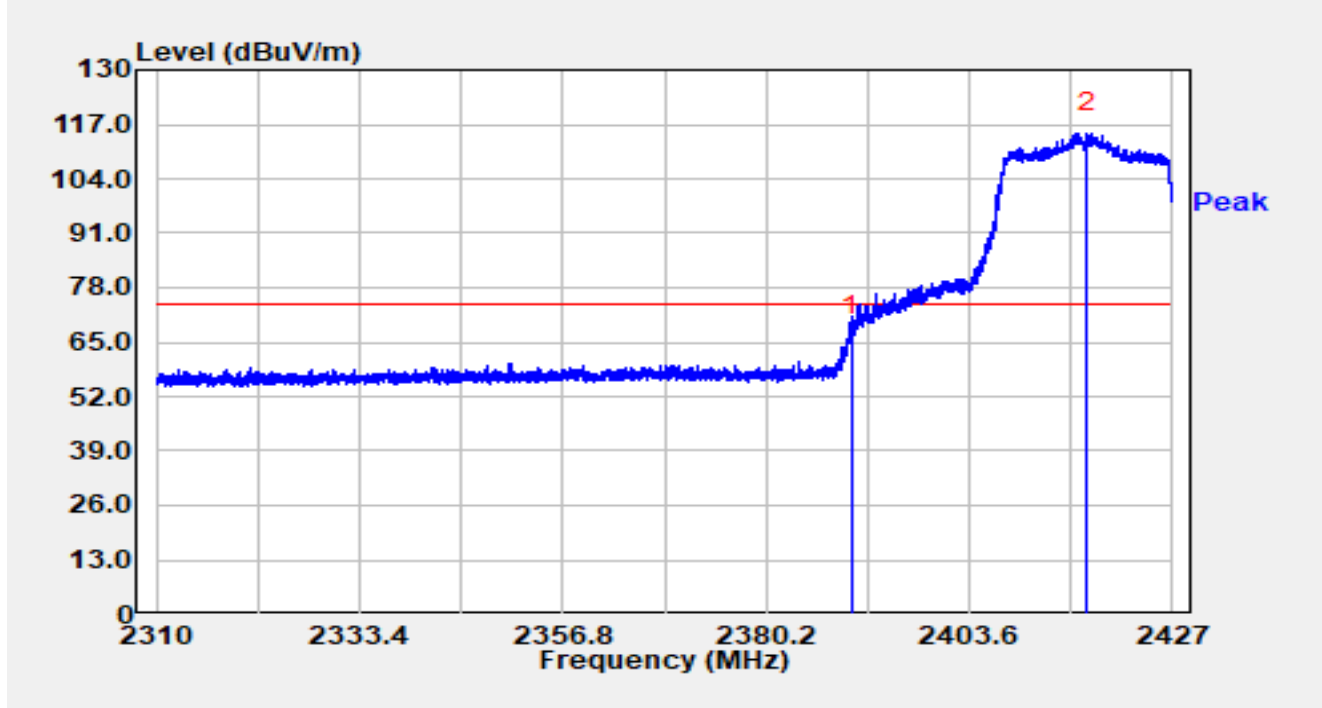


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	36.80	29.59	66.39	-7.61	74.00	Peak
2		2417.207	85.23	29.63	114.87	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2417MHz		

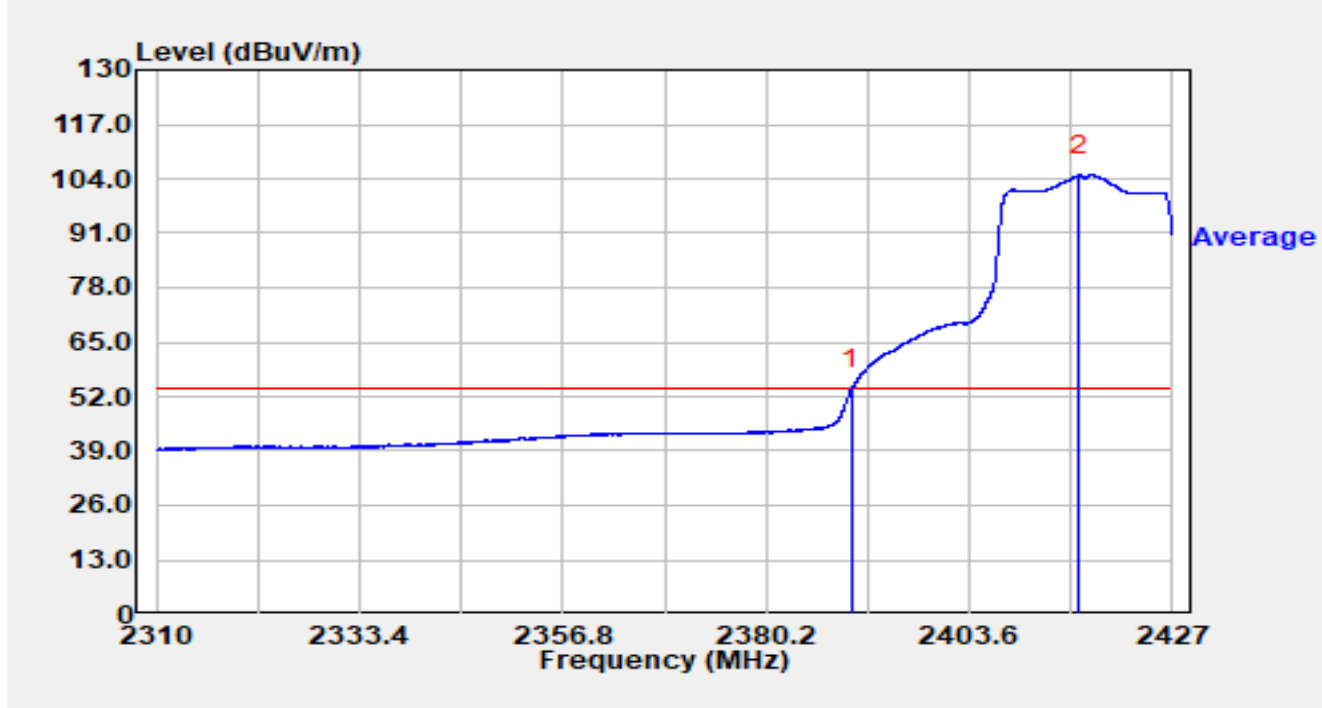


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	23.92	29.59	53.51	-0.49	54.00	Average
2		2416.271	75.28	29.63	104.91	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2422MHz		

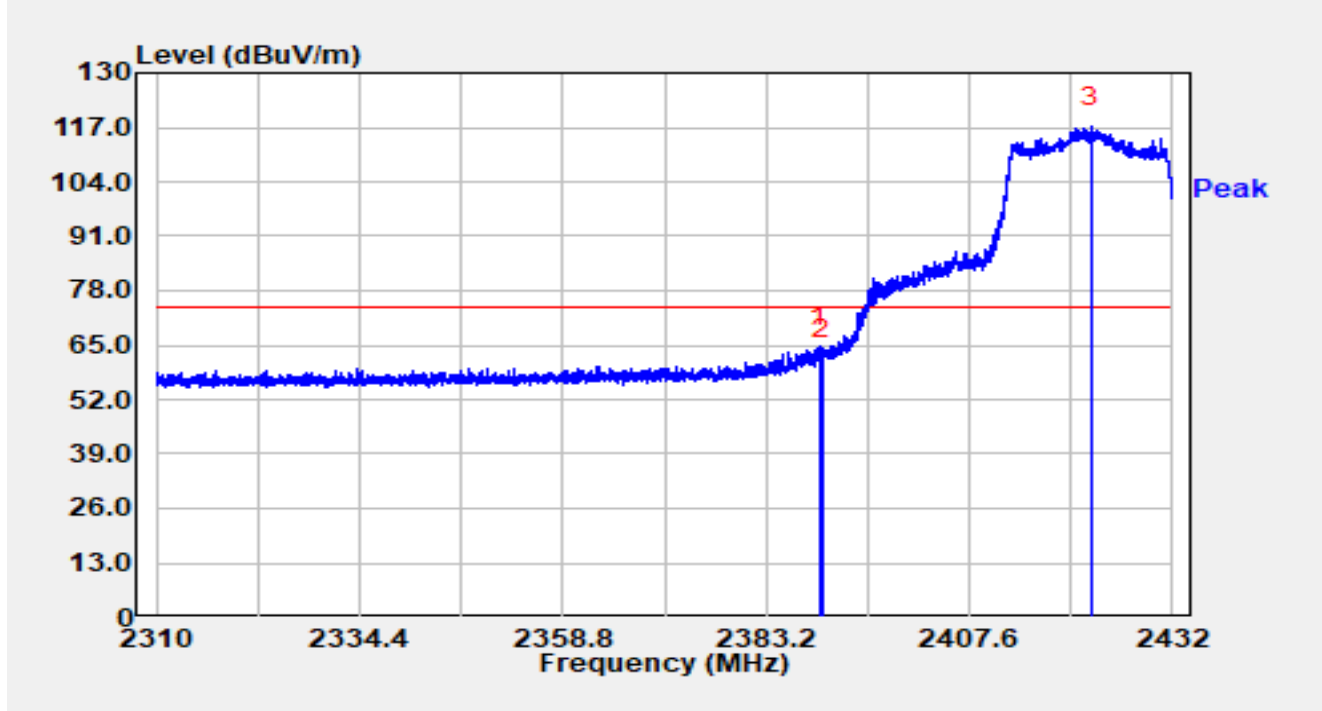


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.581	35.15	29.59	64.74	-9.26	74.00	Peak
2		2390.000	31.92	29.59	61.51	-12.49	74.00	Peak
3		2422.264	87.42	29.64	117.06	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2422MHz		

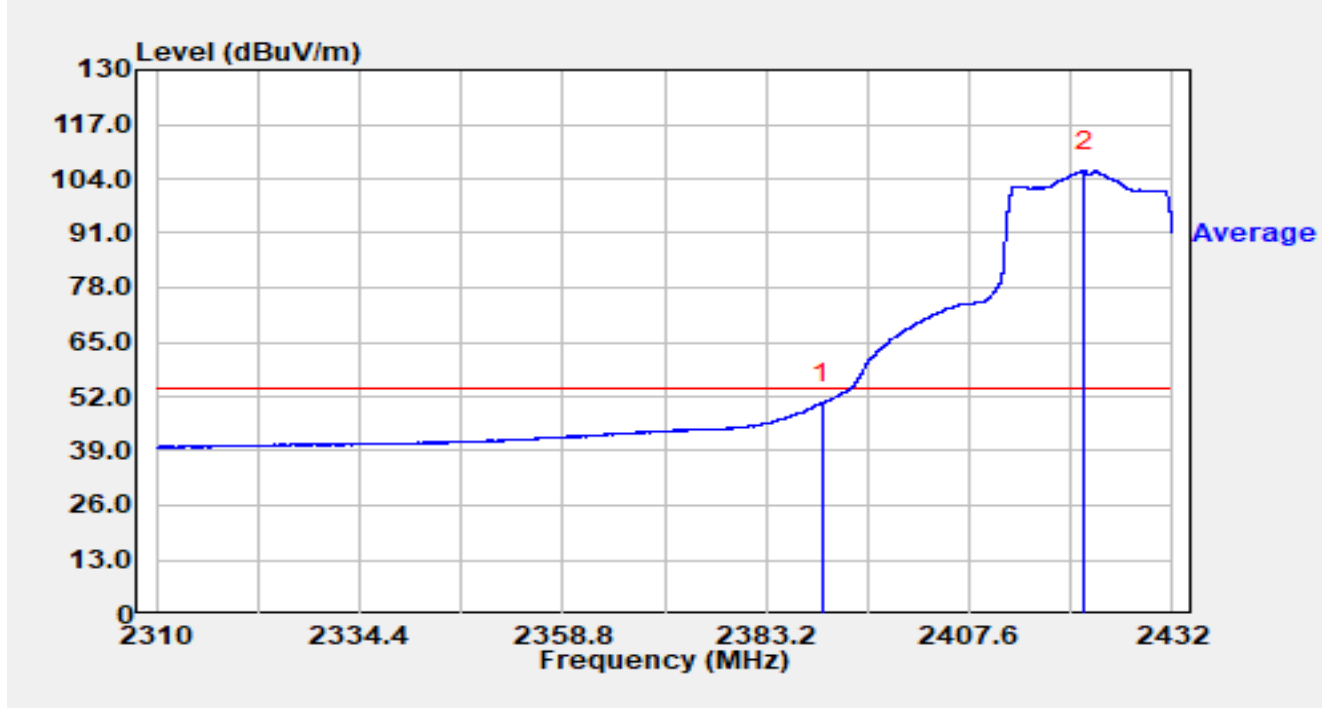


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	20.86	29.59	50.45	-3.55	54.00	Average
2		2421.337	76.27	29.63	105.91	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2422MHz		

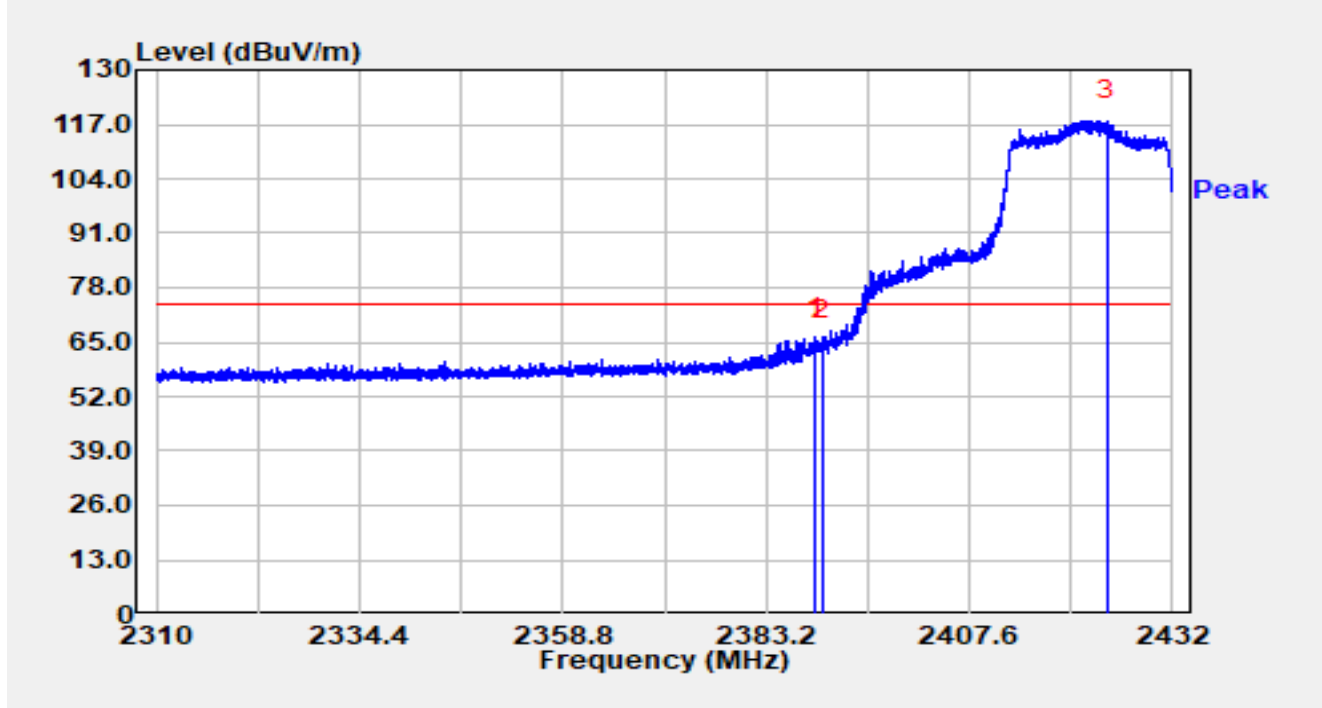


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.117	36.42	29.59	66.01	-7.99	74.00	Peak
2		2390.000	35.90	29.59	65.49	-8.51	74.00	Peak
3		2424.131	88.18	29.64	117.82	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2422MHz		

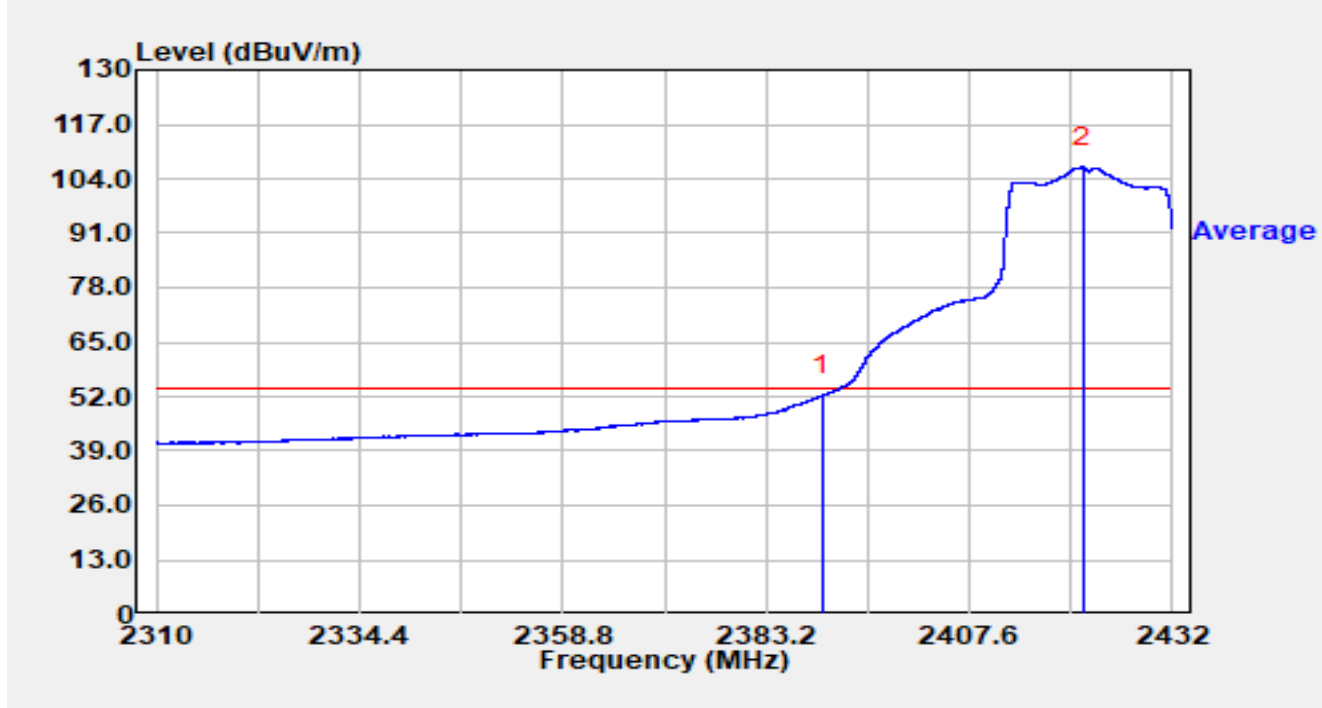


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	22.64	29.59	52.23	-1.77	54.00	Average
2		2421.264	77.14	29.63	106.78	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2437MHz		

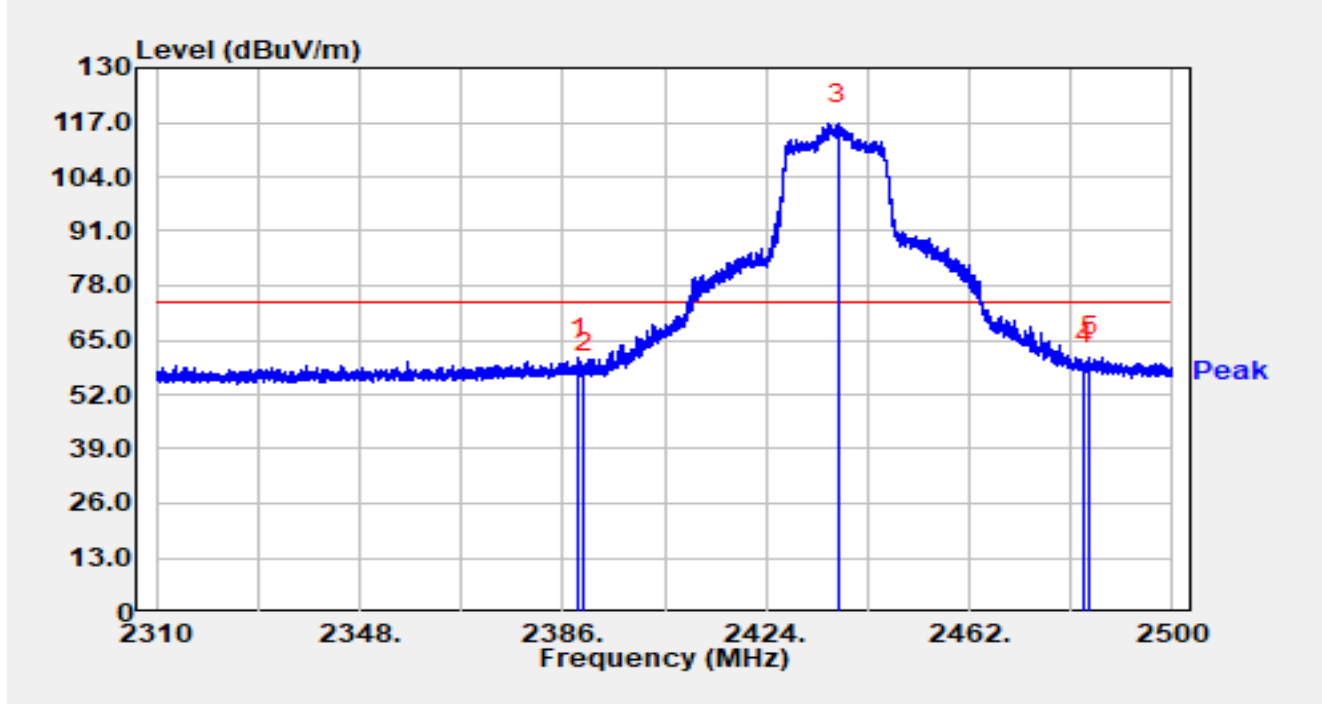


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2388.869	31.17	29.59	60.76	-13.24	74.00	Peak
2		2390.000	27.57	29.59	57.16	-16.84	74.00	Peak
3		2437.376	86.95	29.68	116.63	N/A	N/A	Peak
4		2483.500	29.50	29.76	59.27	-14.73	74.00	Peak
5	*	2484.477	31.07	29.77	60.84	-13.16	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2437MHz		

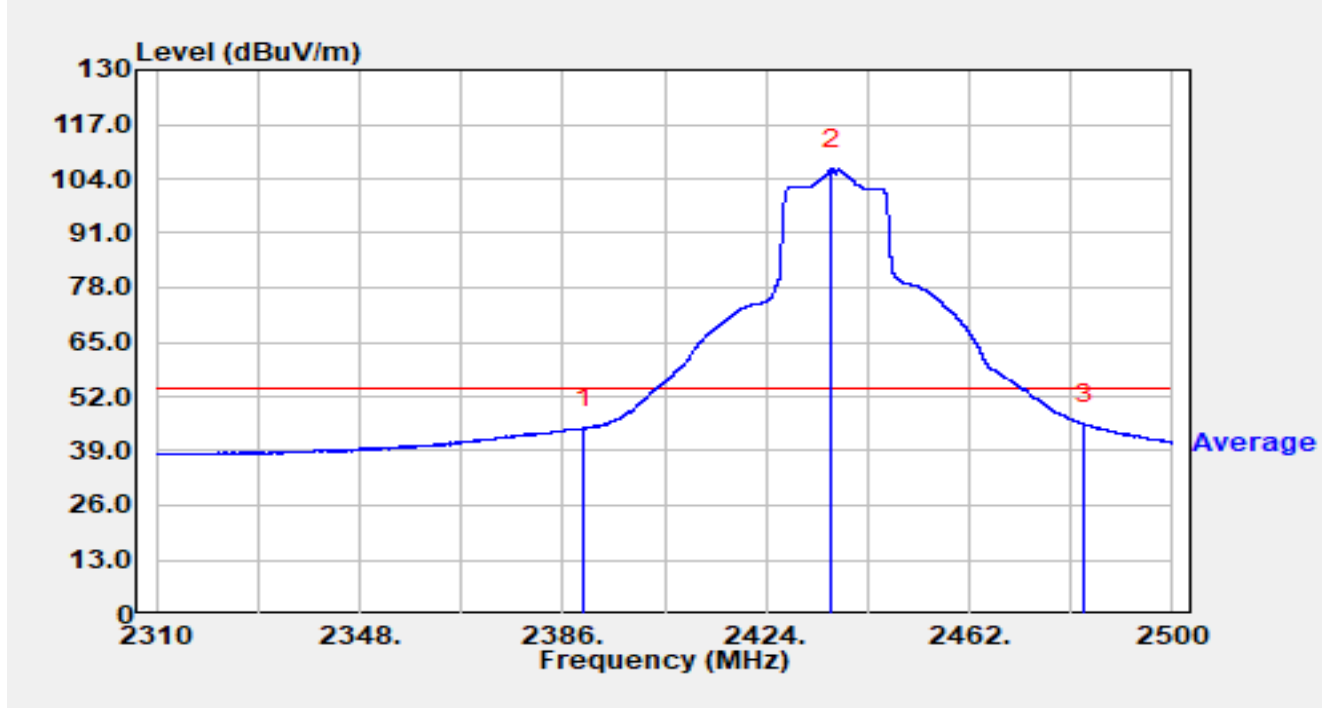


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2390.000	14.81	29.59	44.40	-9.60	54.00	Average
2		2436.293	76.62	29.67	106.30	N/A	N/A	Average
3	*	2483.500	15.63	29.76	45.39	-8.61	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2437MHz		

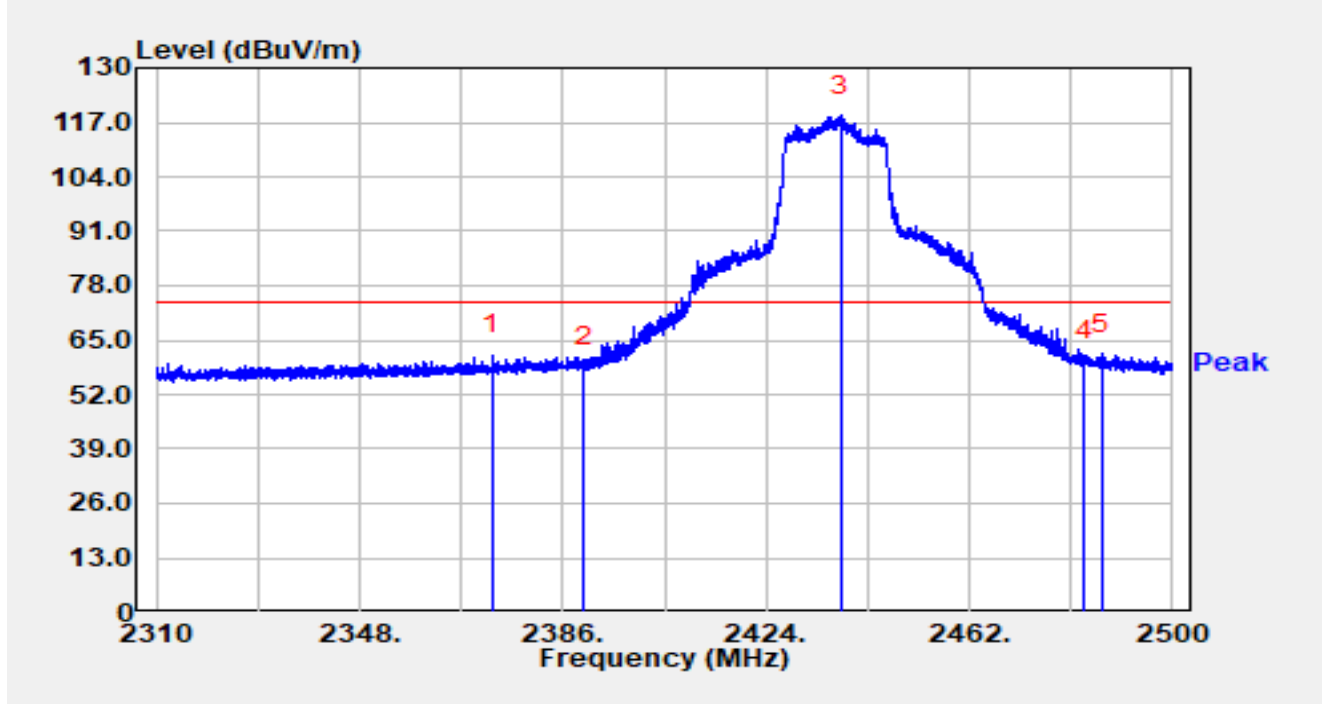


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2372.814	31.85	29.56	61.41	-12.59	74.00	Peak
2		2390.000	29.05	29.59	58.65	-15.35	74.00	Peak
3		2438.098	88.98	29.68	118.66	N/A	N/A	Peak
4		2483.500	30.21	29.76	59.97	-14.03	74.00	Peak
5	*	2486.795	31.89	29.78	61.67	-12.33	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2437MHz		

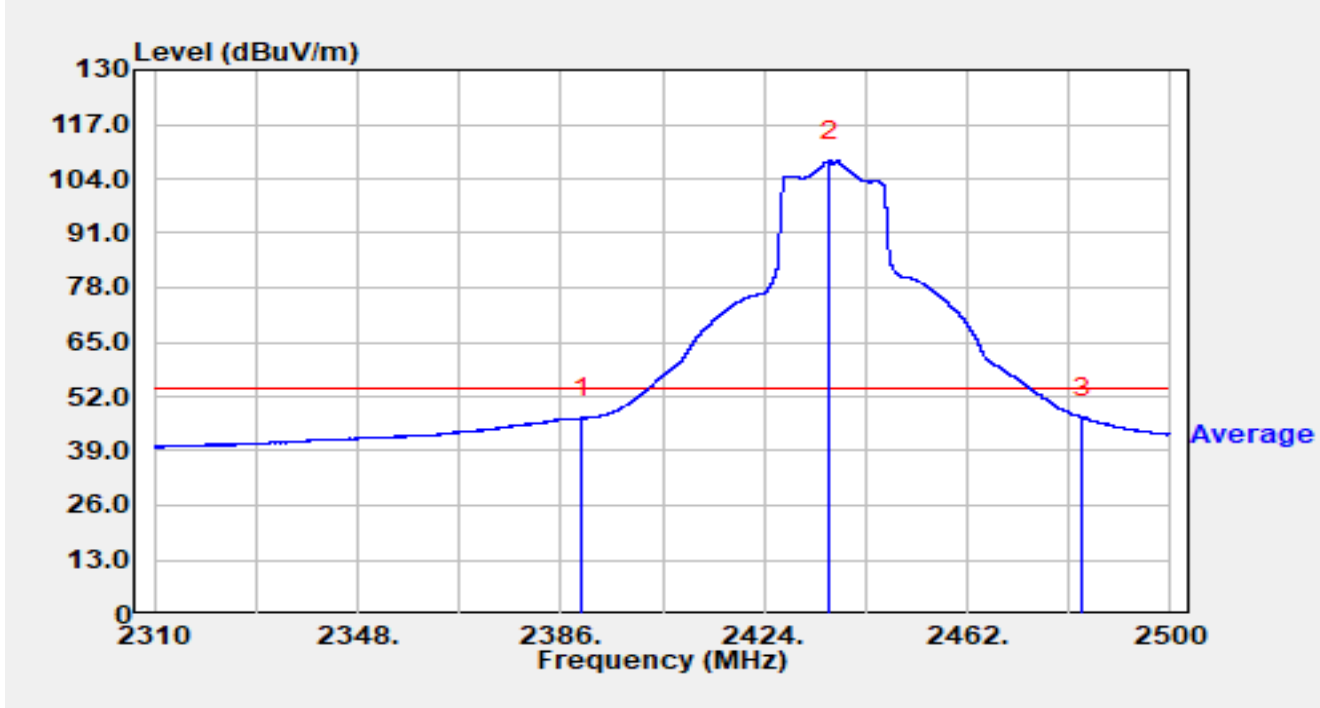


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2390.000	17.24	29.59	46.84	-7.16	54.00	Average
2		2436.312	78.71	29.67	108.38	N/A	N/A	Average
3	*	2483.500	17.27	29.76	47.04	-6.96	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2452MHz		

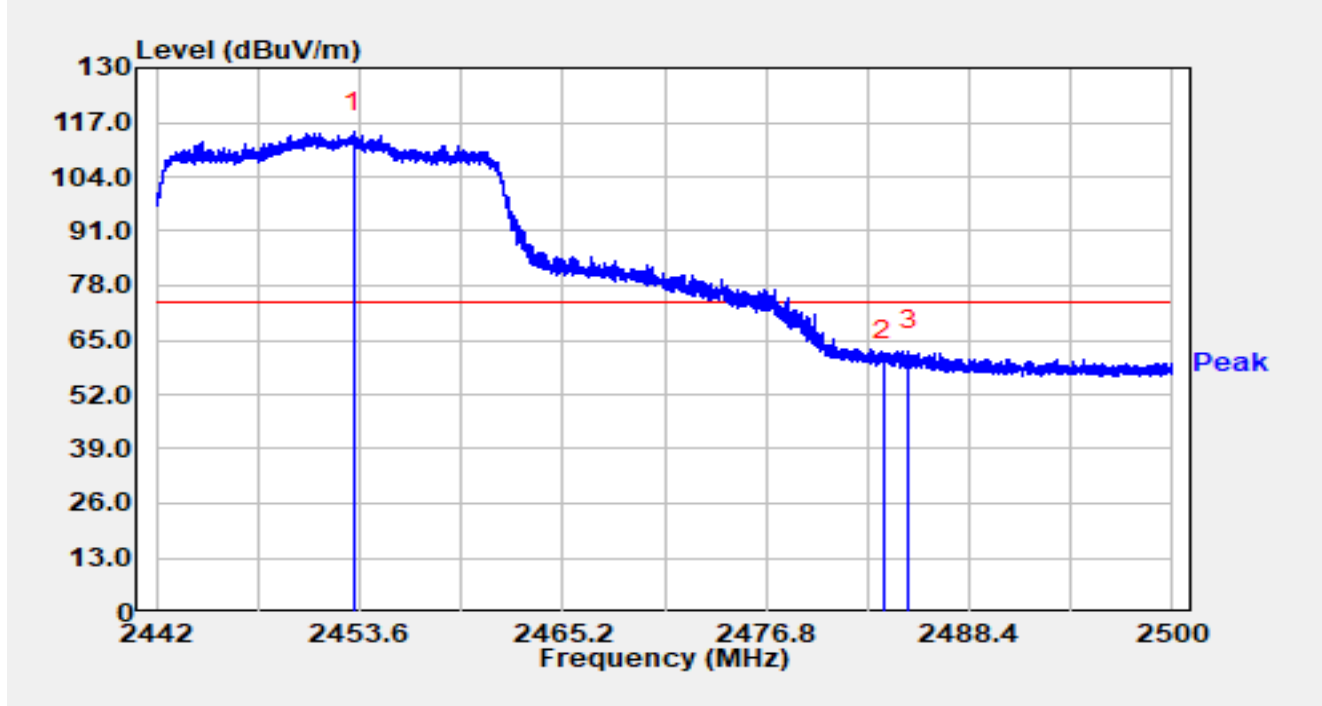


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2453.235	84.86	29.70	114.56	N/A	N/A	Peak
2		2483.500	30.18	29.76	59.94	-14.06	74.00	Peak
3	*	2484.961	32.61	29.77	62.38	-11.62	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2452MHz		

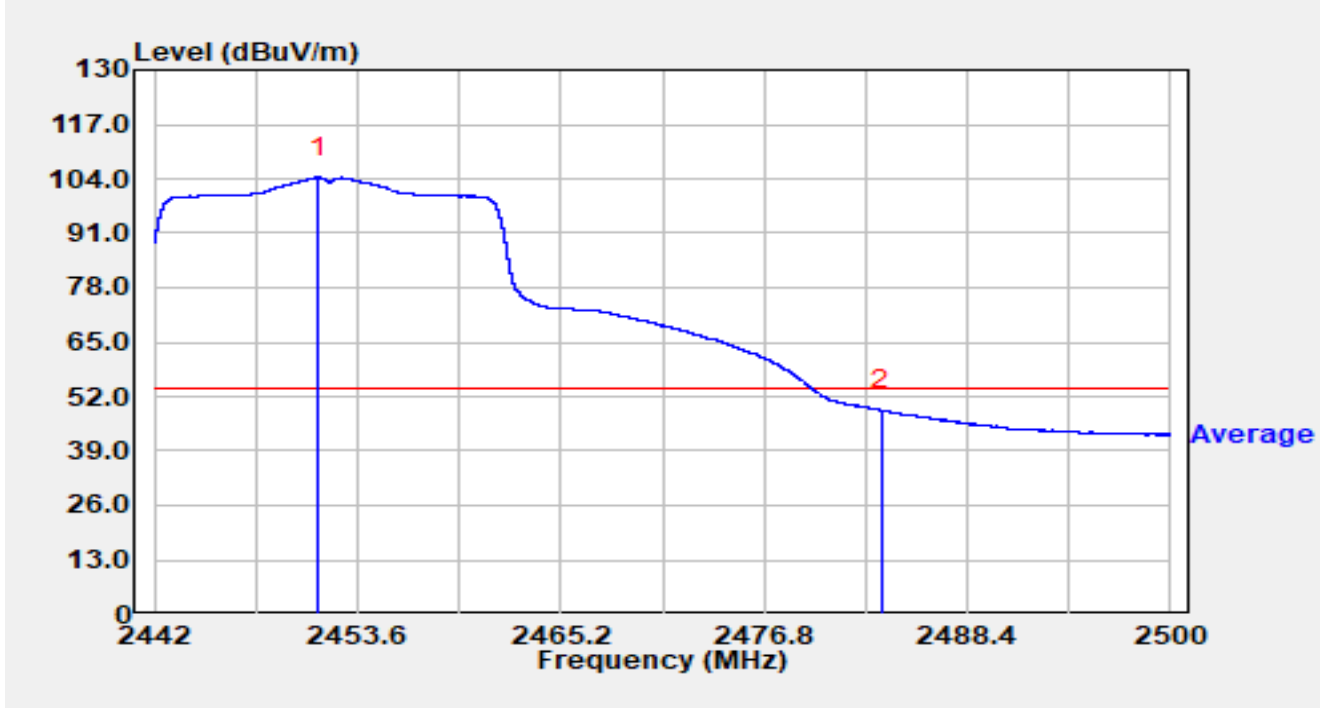


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2451.338	74.58	29.70	104.28	N/A	N/A	Average
2	*	2483.500	18.81	29.76	48.58	-5.42	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2452MHz		

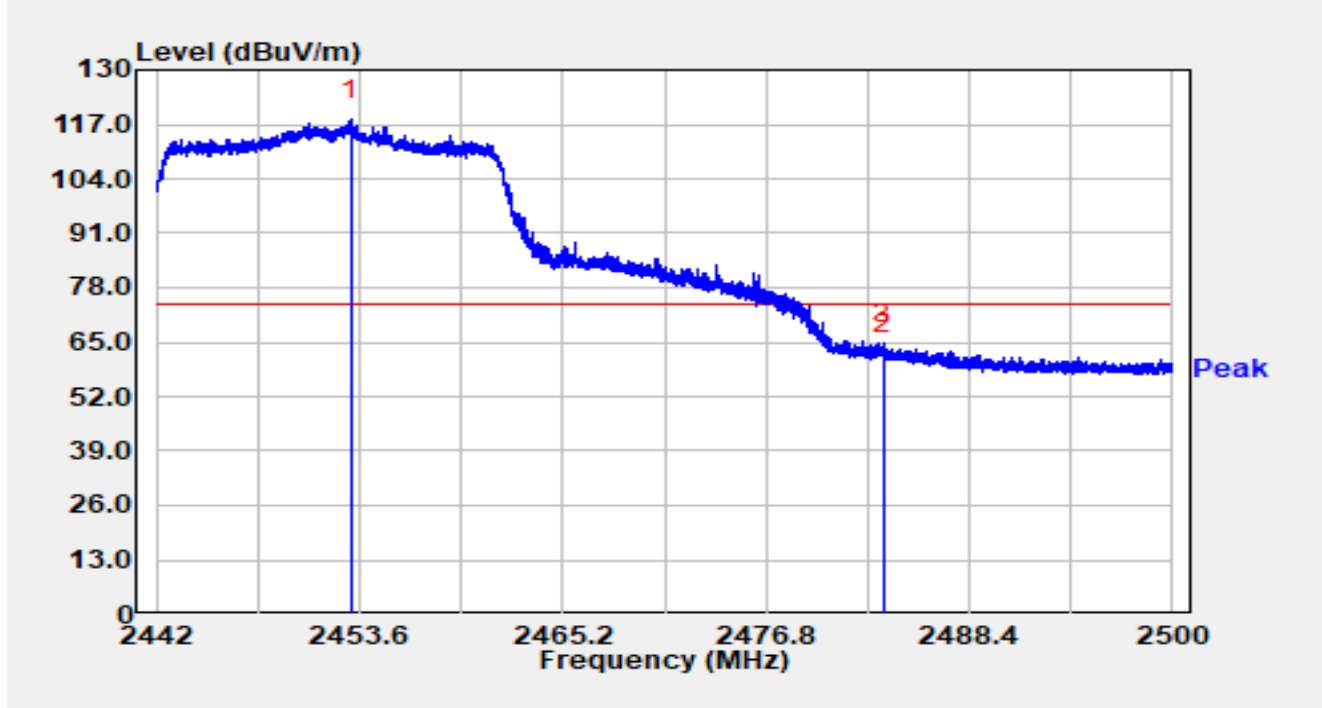


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2453.072	88.38	29.70	118.08	N/A	N/A	Peak
2		2483.500	32.12	29.76	61.89	-12.11	74.00	Peak
3	*	2483.522	34.75	29.76	64.51	-9.49	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2452MHz		

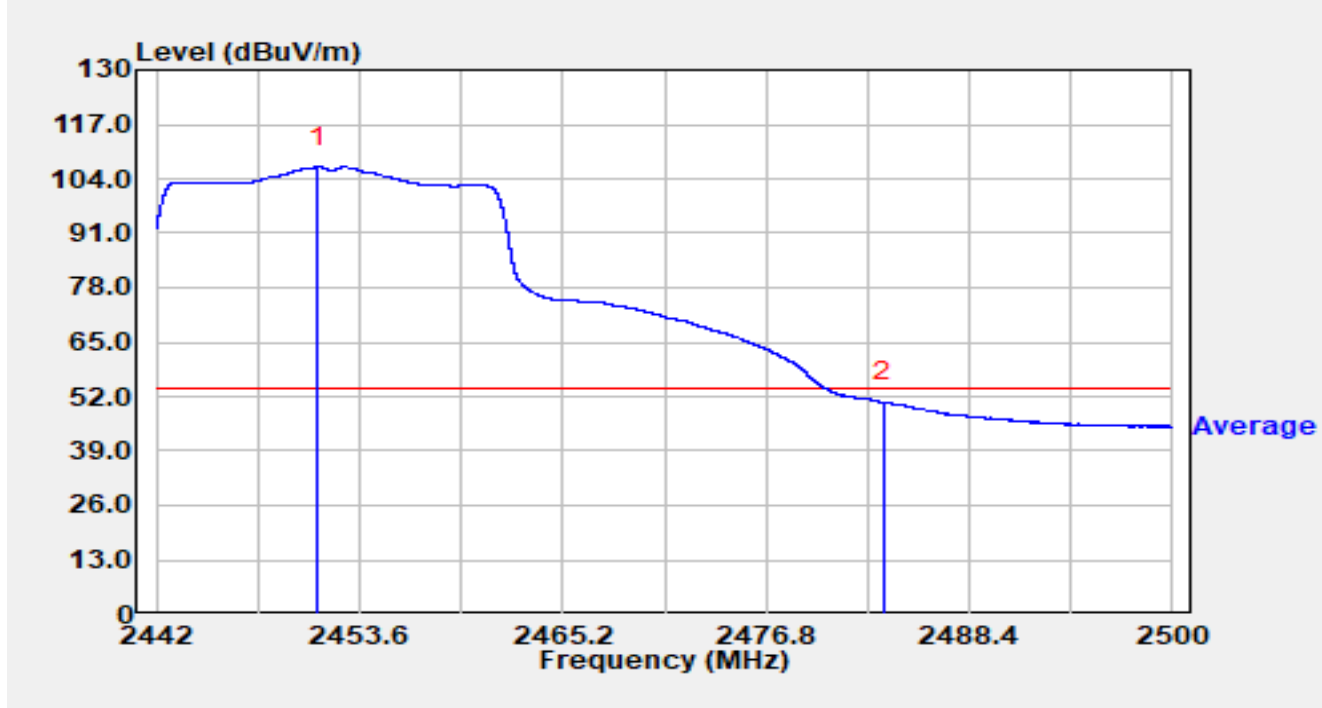


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2451.205	77.12	29.70	106.82	N/A	N/A	Average
2	*	2483.500	20.90	29.76	50.66	-3.34	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2457MHz		

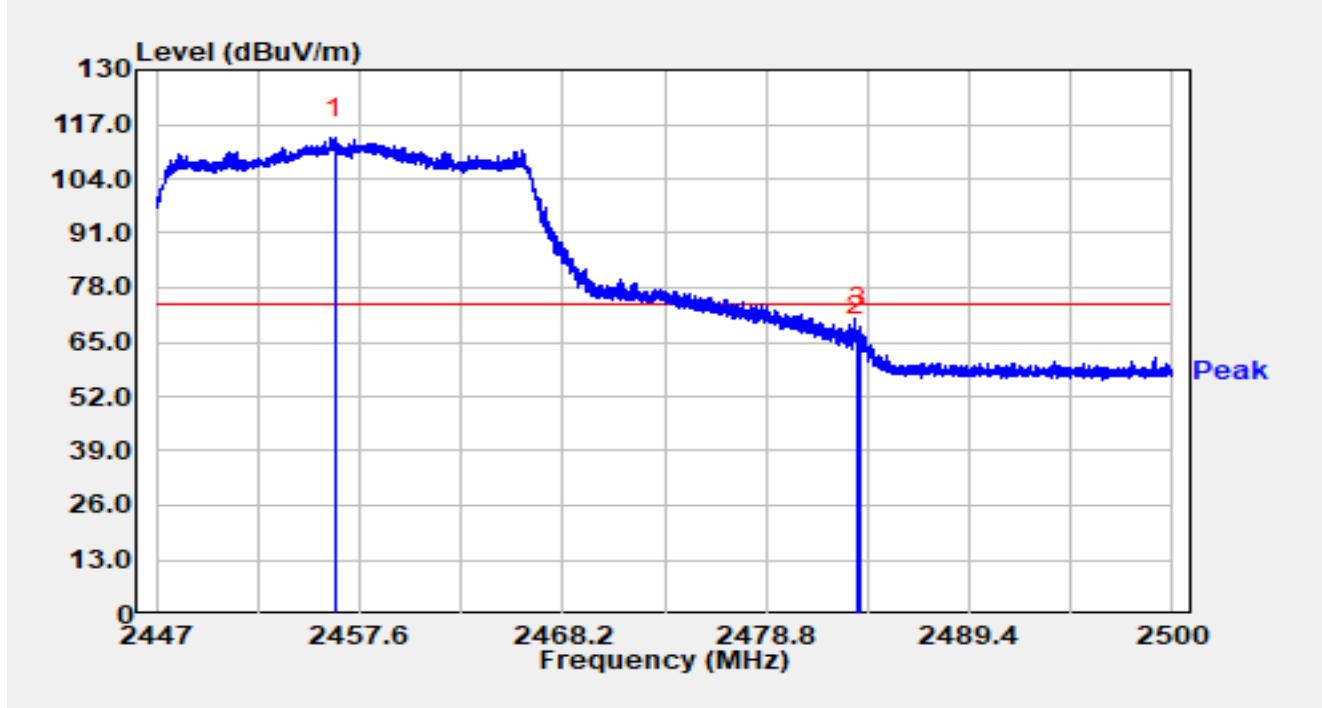


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2456.317	84.09	29.70	113.79	N/A	N/A	Peak
2		2483.500	36.79	29.76	66.56	-7.44	74.00	Peak
3	*	2483.702	38.72	29.76	68.49	-5.51	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2457MHz		

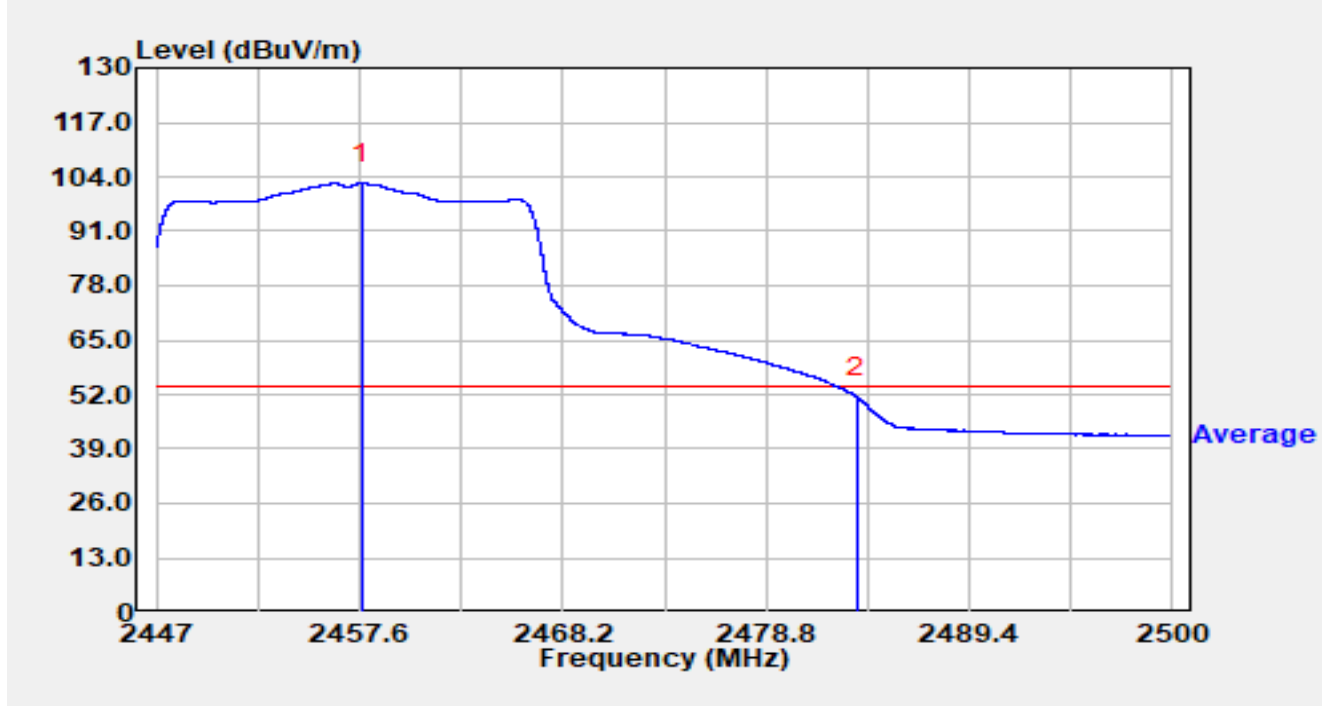


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2457.717	72.77	29.70	102.47	N/A	N/A	Average
2	*	2483.500	21.74	29.76	51.50	-2.50	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2457MHz		

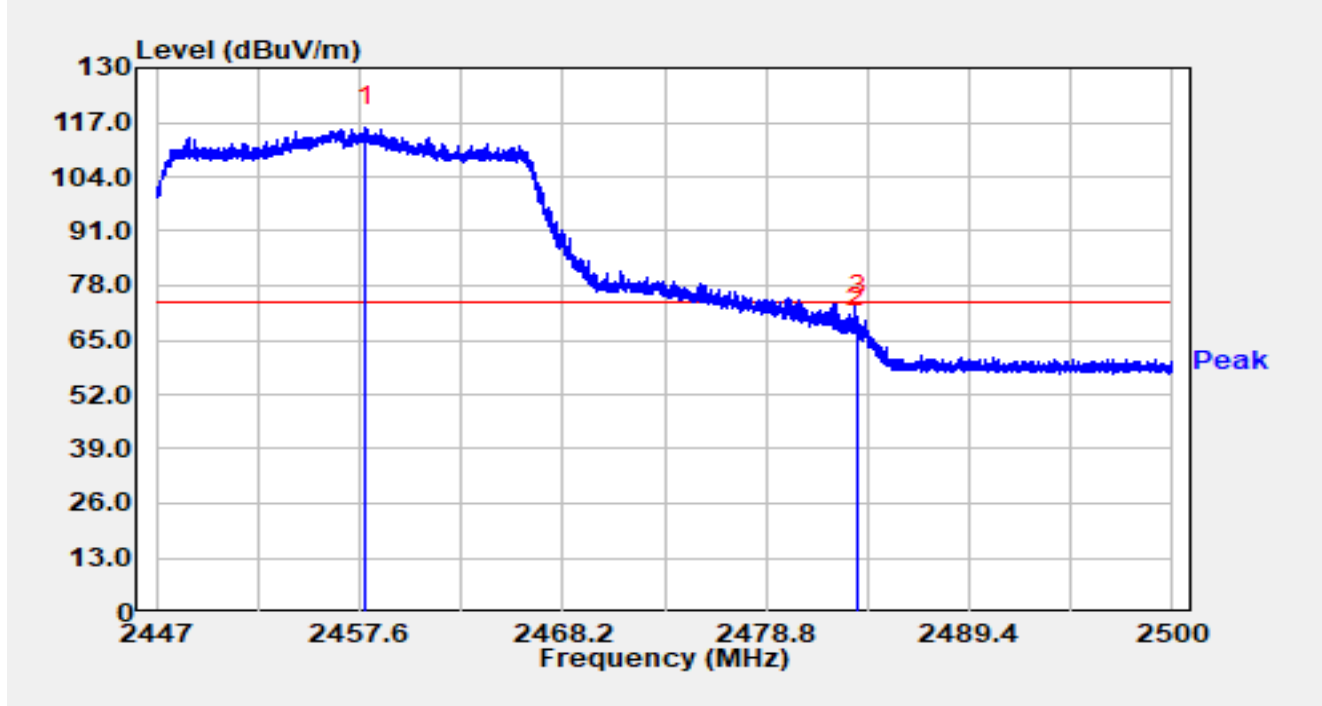


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2457.918	86.29	29.71	115.99	N/A	N/A	Peak
2		2483.500	38.00	29.76	67.77	-6.23	74.00	Peak
3	*	2483.581	41.10	29.76	70.86	-3.14	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2457MHz		

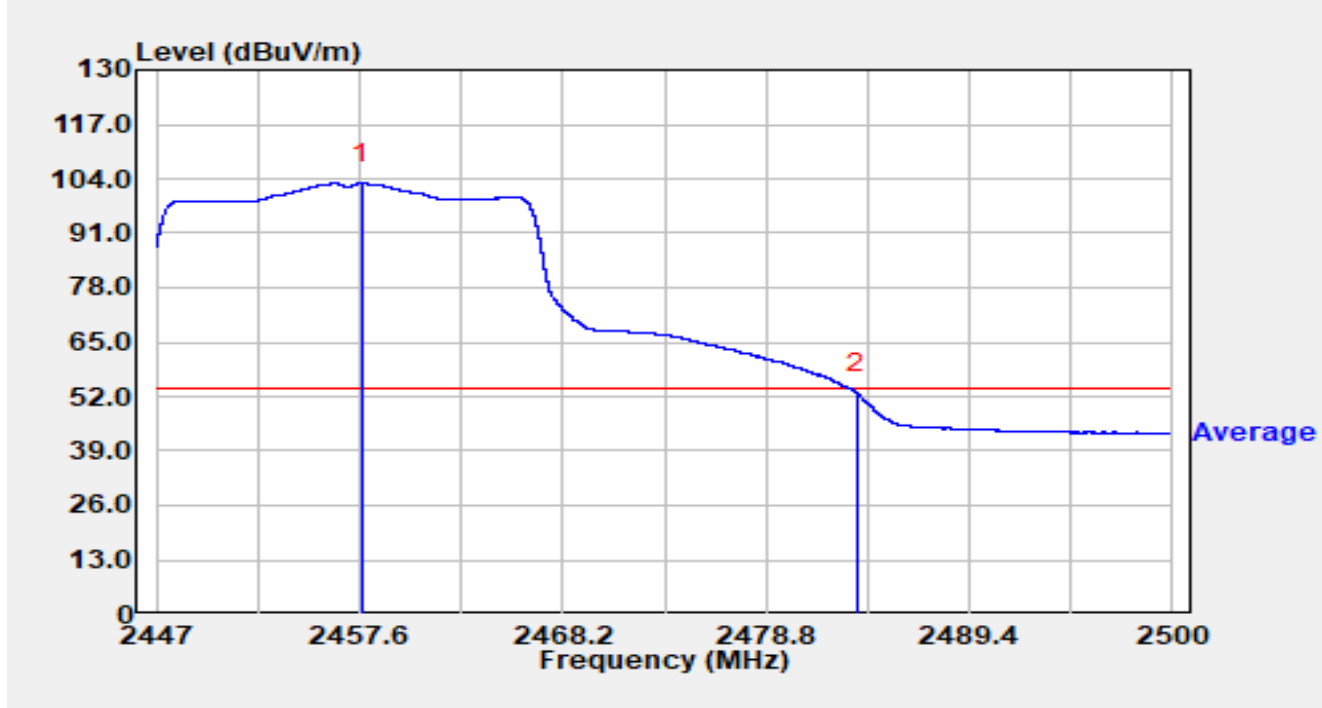


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2457.674	73.28	29.70	102.99	N/A	N/A	Average
2	*	2483.500	23.05	29.76	52.81	-1.19	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz		

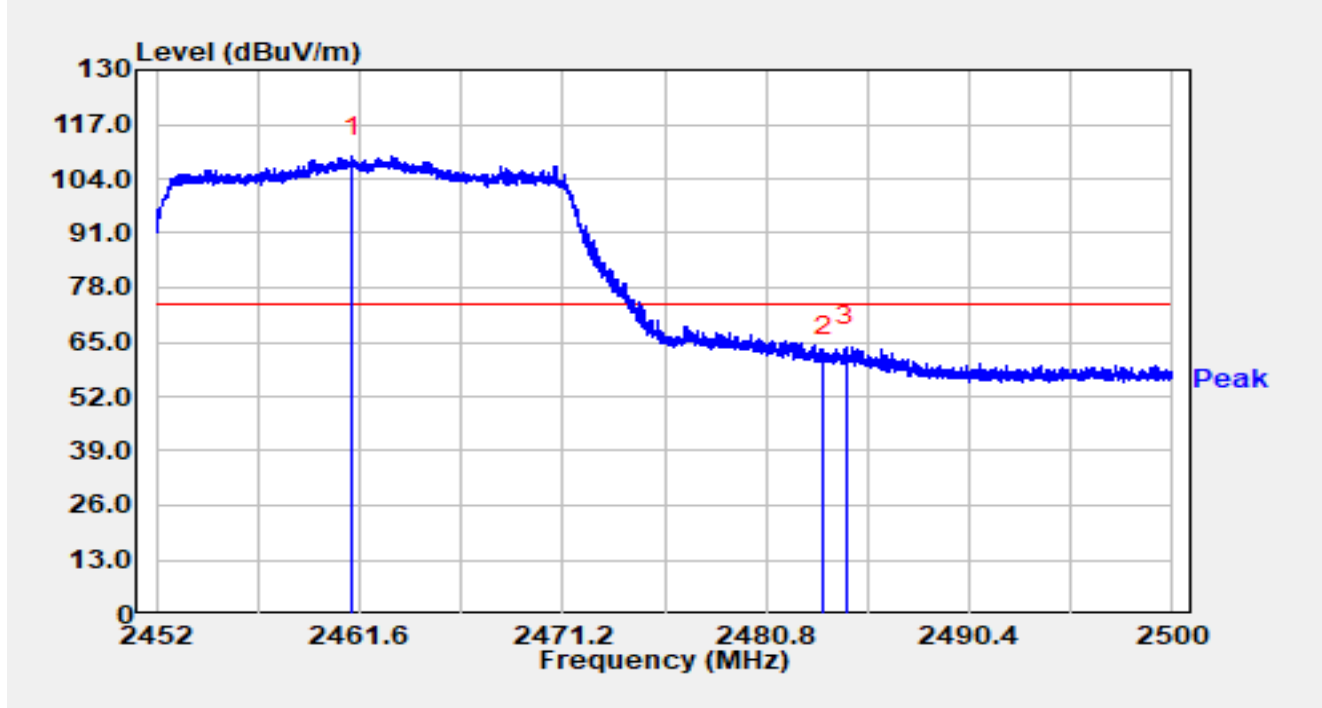


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.230	79.62	29.71	109.33	N/A	N/A	Peak
2		2483.500	31.58	29.76	61.35	-12.65	74.00	Peak
3	*	2484.602	34.03	29.77	63.80	-10.20	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz		

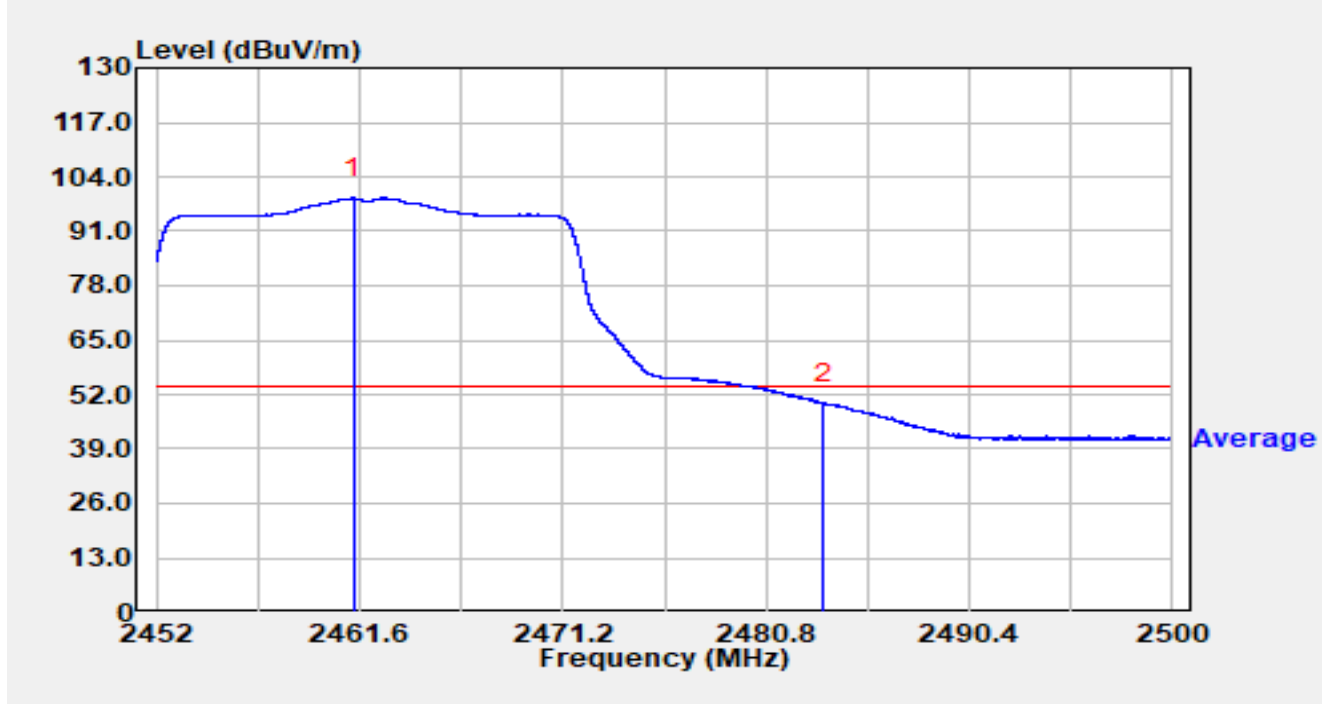


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.326	69.19	29.71	98.91	N/A	N/A	Average
2	*	2483.500	20.14	29.76	49.91	-4.09	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz		

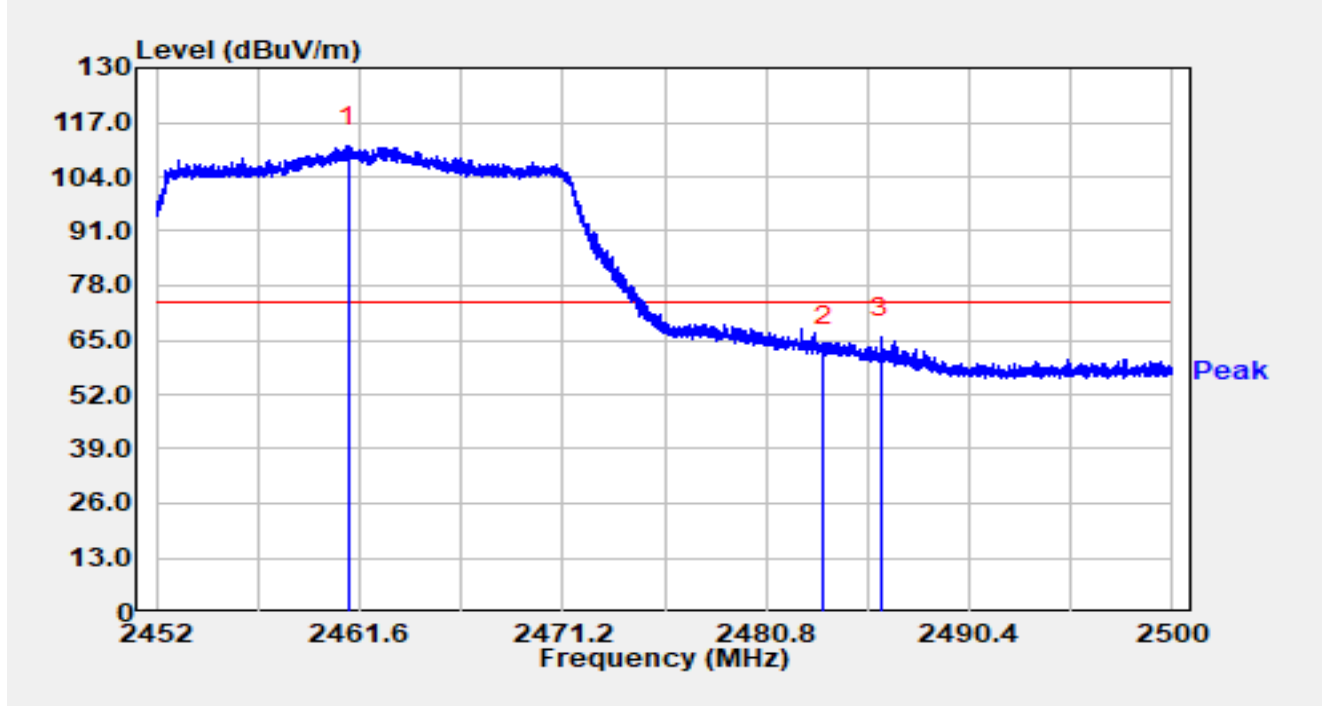


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.038	81.46	29.71	111.17	N/A	N/A	Peak
2		2483.500	33.96	29.76	63.72	-10.28	74.00	Peak
3	*	2486.219	35.91	29.77	65.68	-8.32	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz		

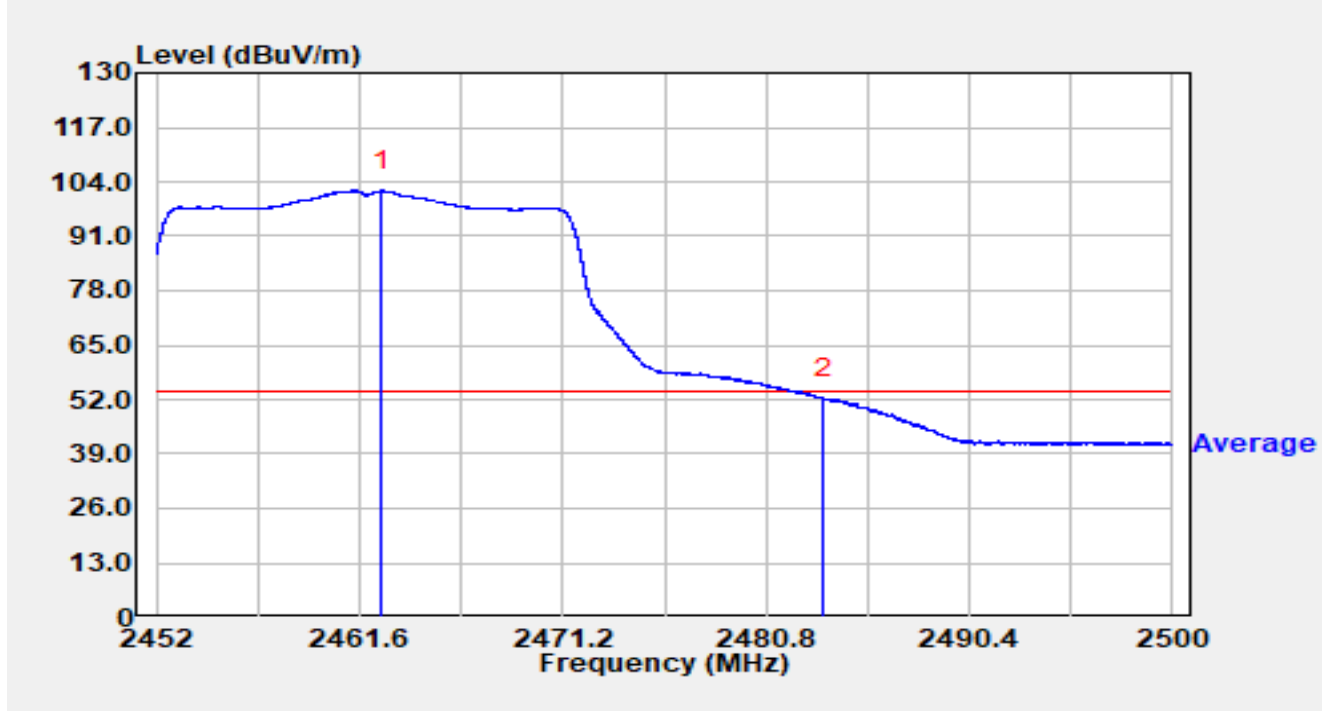


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.627	72.11	29.71	101.83	N/A	N/A	Average
2	*	2483.500	22.58	29.76	52.35	-1.65	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz		

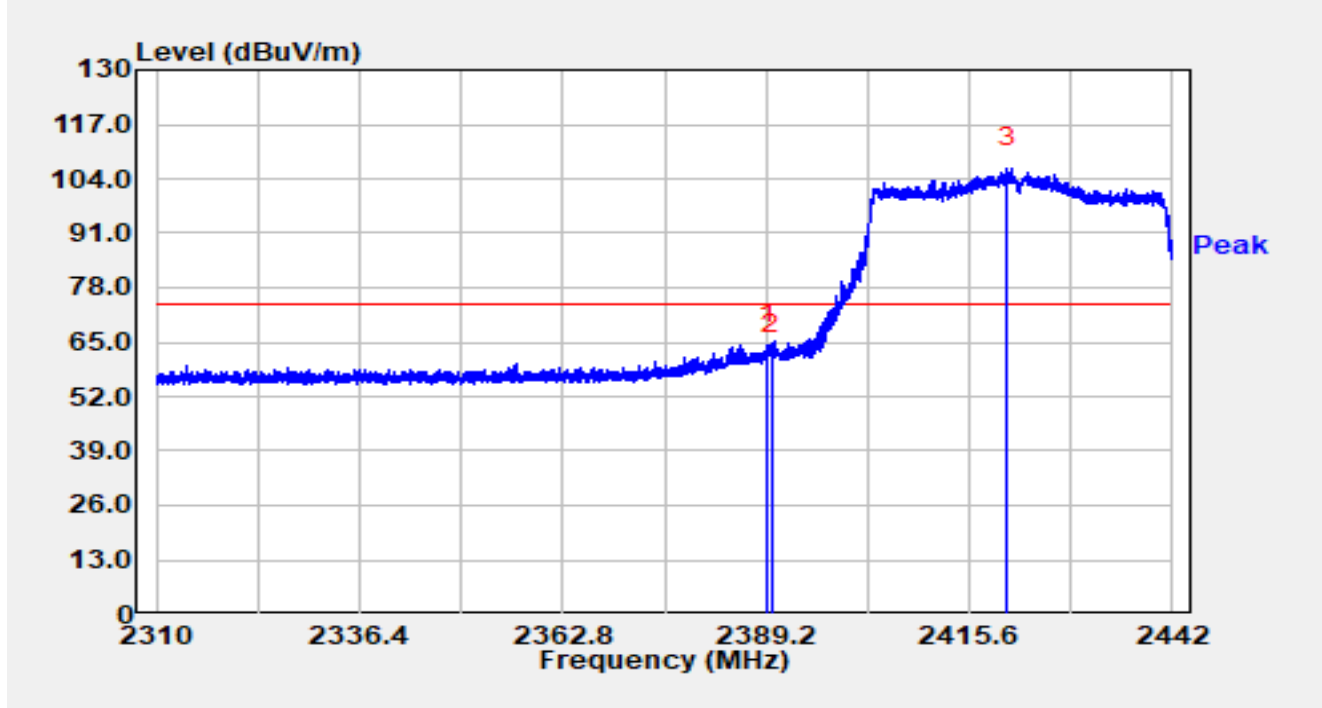


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.477	34.80	29.59	64.39	-9.61	74.00	Peak
2		2390.000	32.56	29.59	62.15	-11.85	74.00	Peak
3		2420.563	76.97	29.63	106.60	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz		

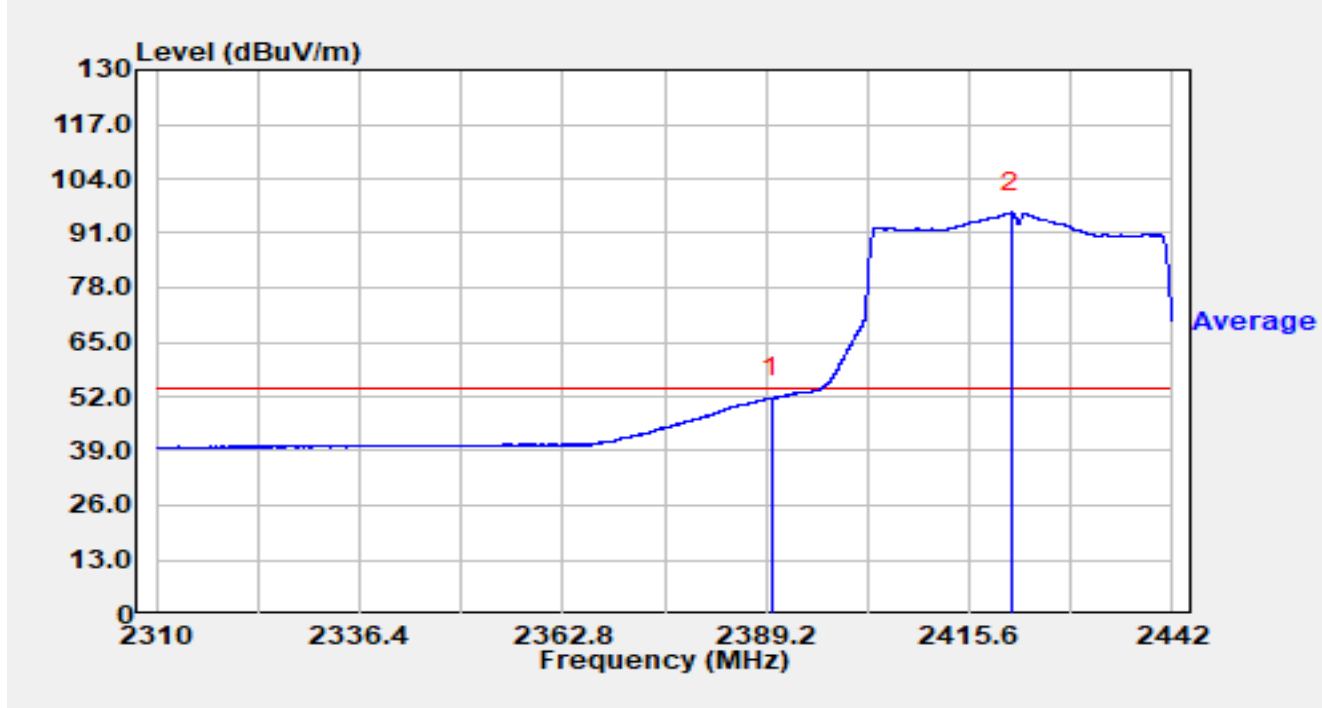


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	22.02	29.59	51.61	-2.39	54.00	Average
2		2421.091	66.35	29.63	95.98	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz		

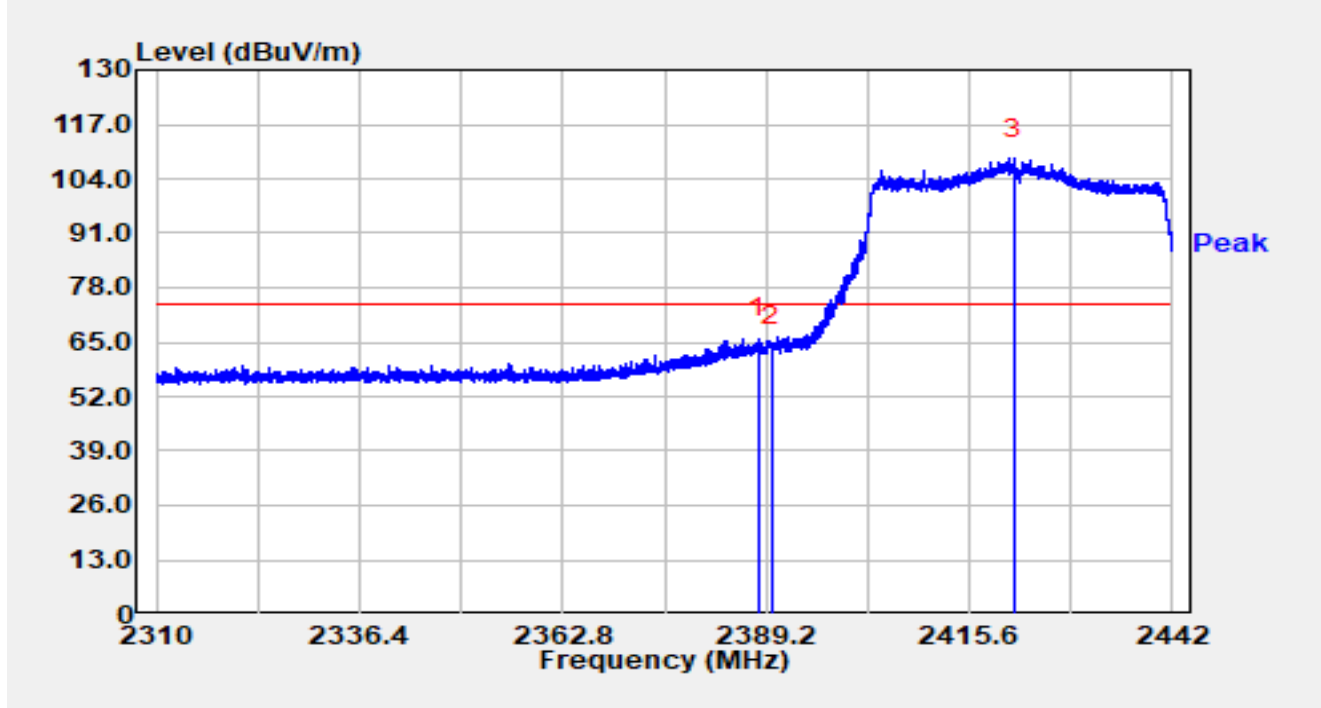


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.170	36.35	29.58	65.93	-8.07	74.00	Peak
2		2390.000	34.29	29.59	63.89	-10.11	74.00	Peak
3		2421.368	79.18	29.63	108.81	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz		

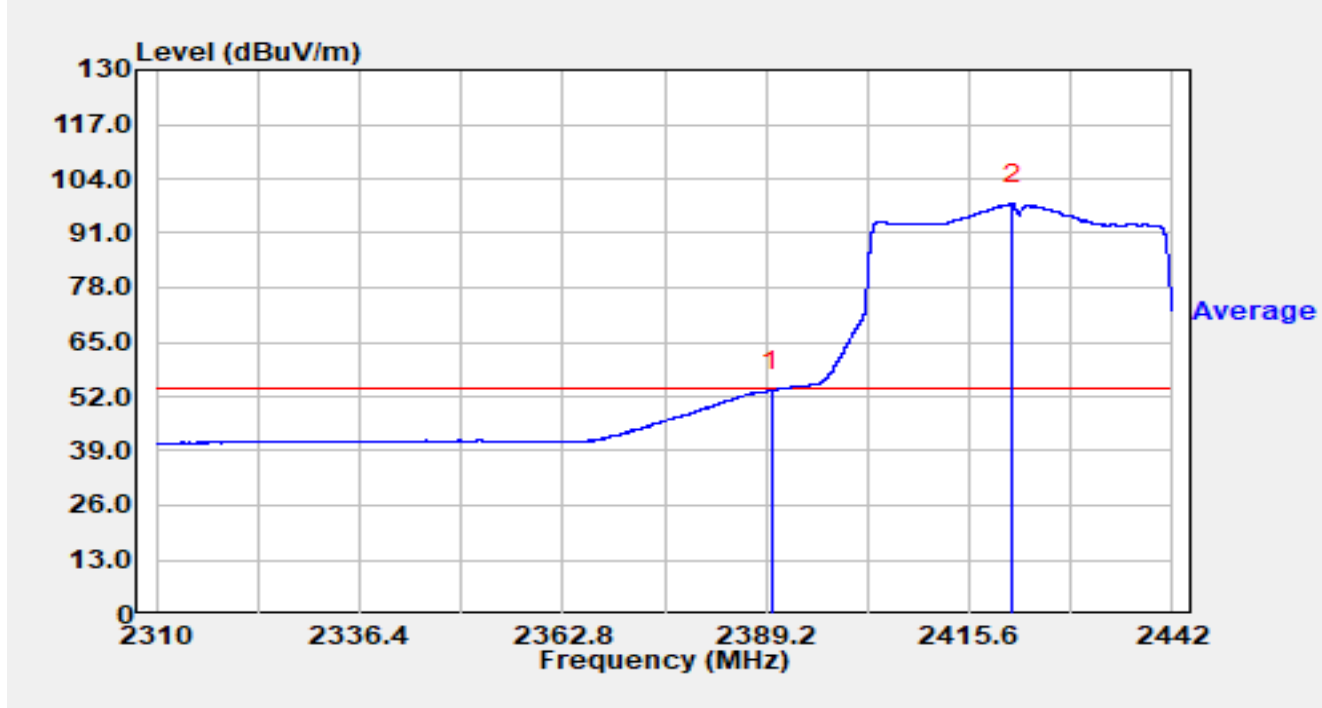


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	23.86	29.59	53.45	-0.55	54.00	Average
2		2421.131	68.45	29.63	98.08	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2437MHz		

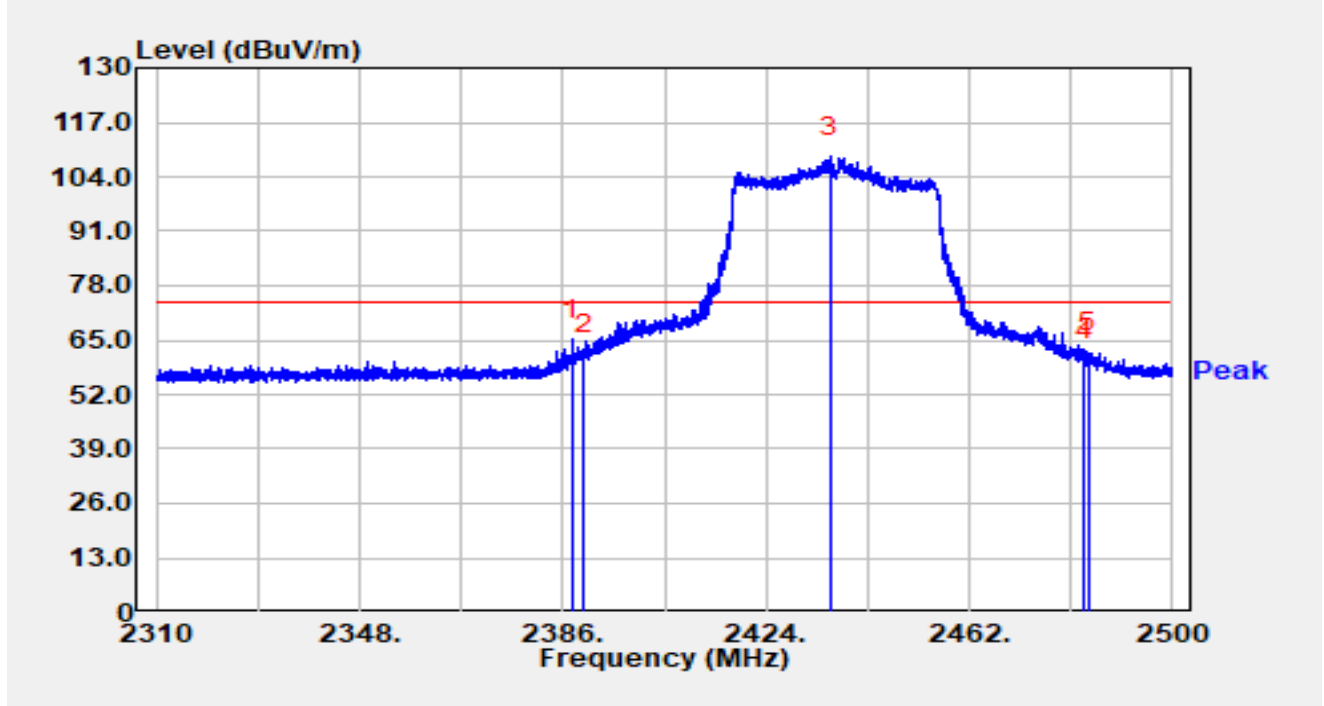


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.672	35.47	29.58	65.05	-8.95	74.00	Peak
2		2390.000	32.01	29.59	61.60	-12.40	74.00	Peak
3		2436.027	79.23	29.67	108.90	N/A	N/A	Peak
4		2483.500	30.31	29.76	60.07	-13.93	74.00	Peak
5		2484.230	32.27	29.77	62.04	-11.96	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2437MHz		

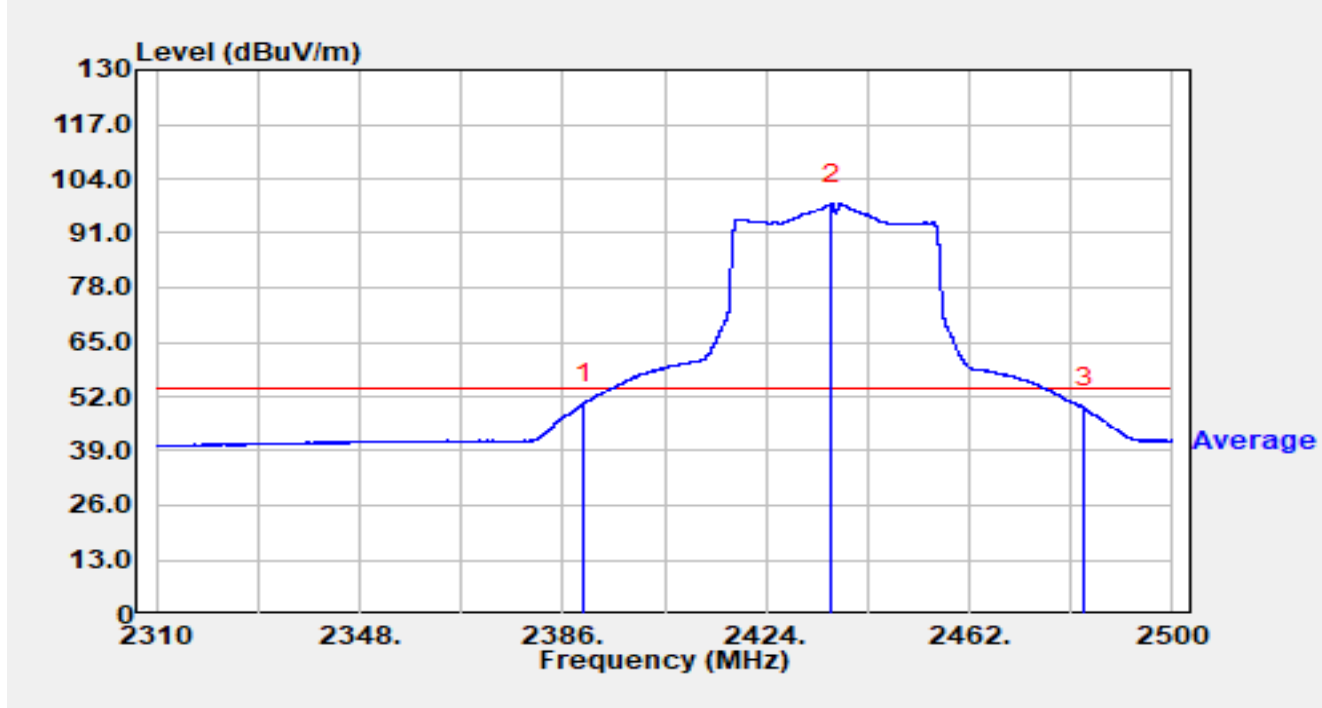


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	20.81	29.59	50.40	-3.60	54.00	Average
2		2436.122	68.35	29.67	98.03	N/A	N/A	Average
3		2483.500	19.44	29.76	49.21	-4.79	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2437MHz		

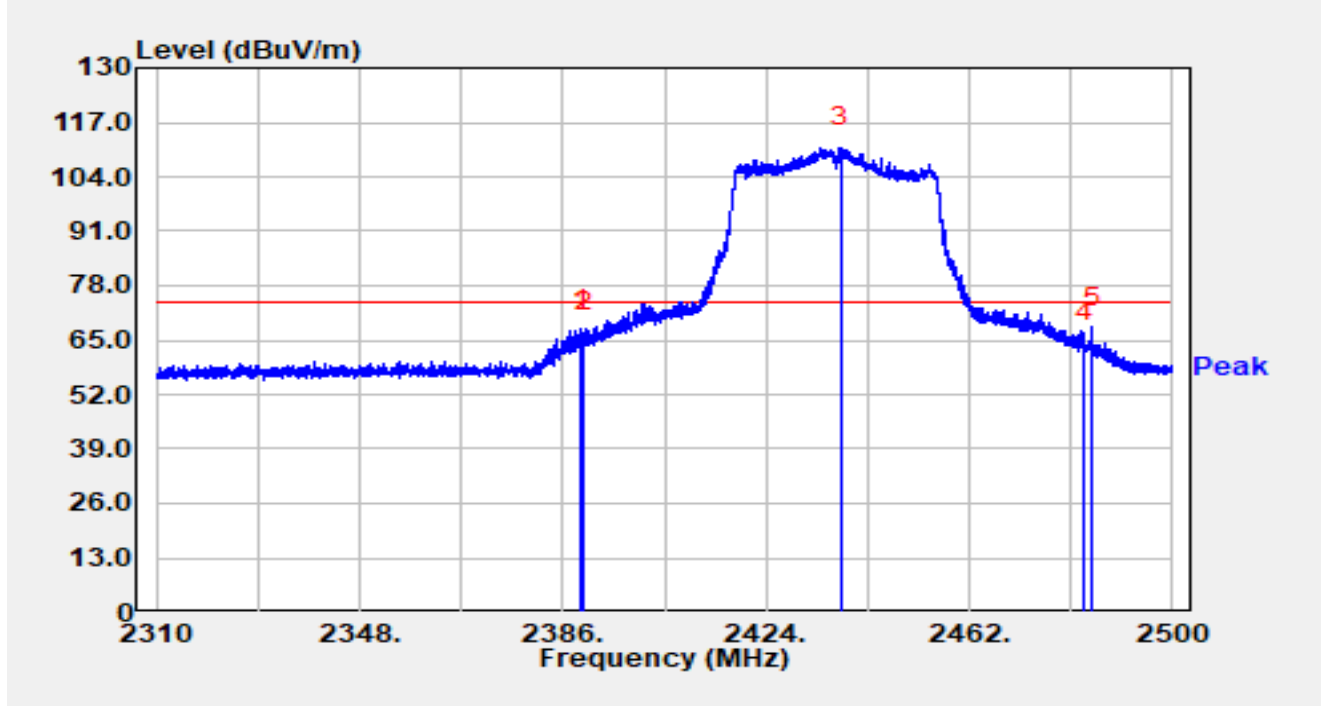


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2389.382	37.96	29.59	67.55	-6.45	74.00	Peak
2		2390.000	37.17	29.59	66.77	-7.23	74.00	Peak
3		2437.984	81.39	29.68	111.07	N/A	N/A	Peak
4		2483.500	34.94	29.76	64.71	-9.29	74.00	Peak
5	*	2484.990	38.34	29.77	68.11	-5.89	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2437MHz		

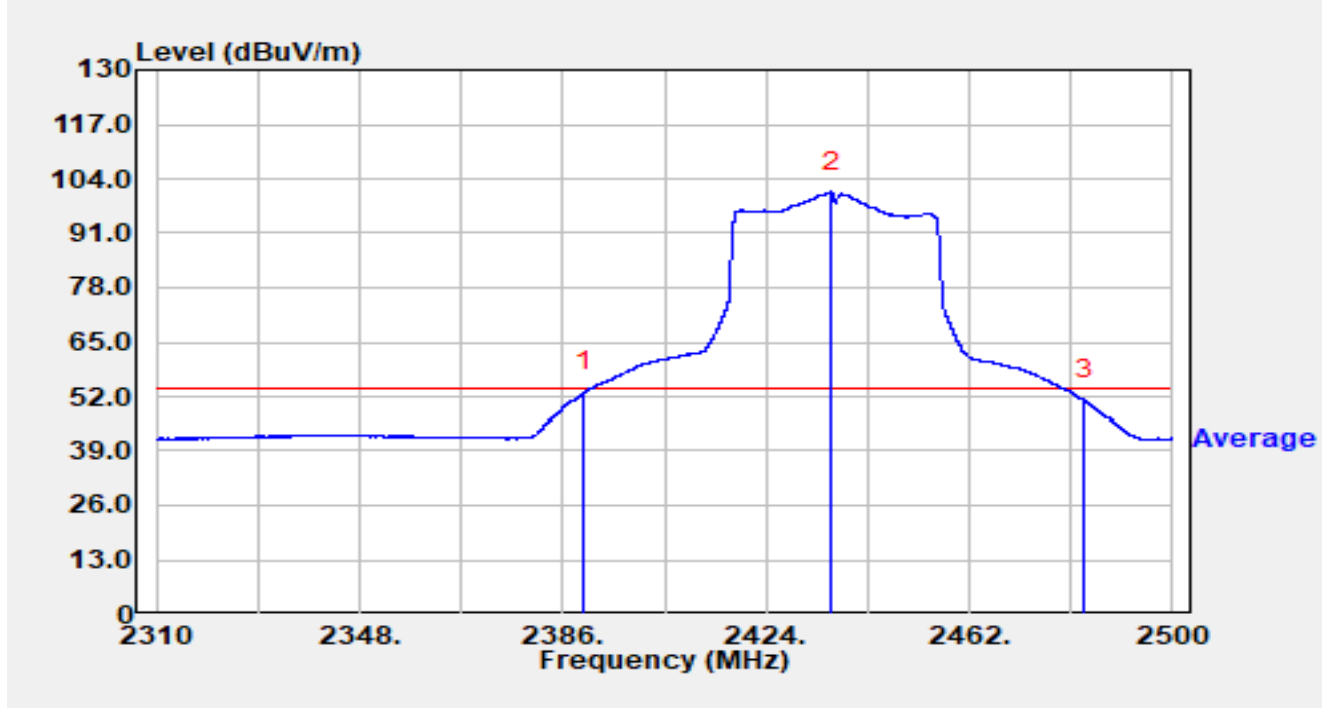


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	23.45	29.59	53.04	-0.96	54.00	Average
2		2436.122	71.22	29.67	100.90	N/A	N/A	Average
3		2483.500	21.36	29.76	51.13	-2.87	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz		

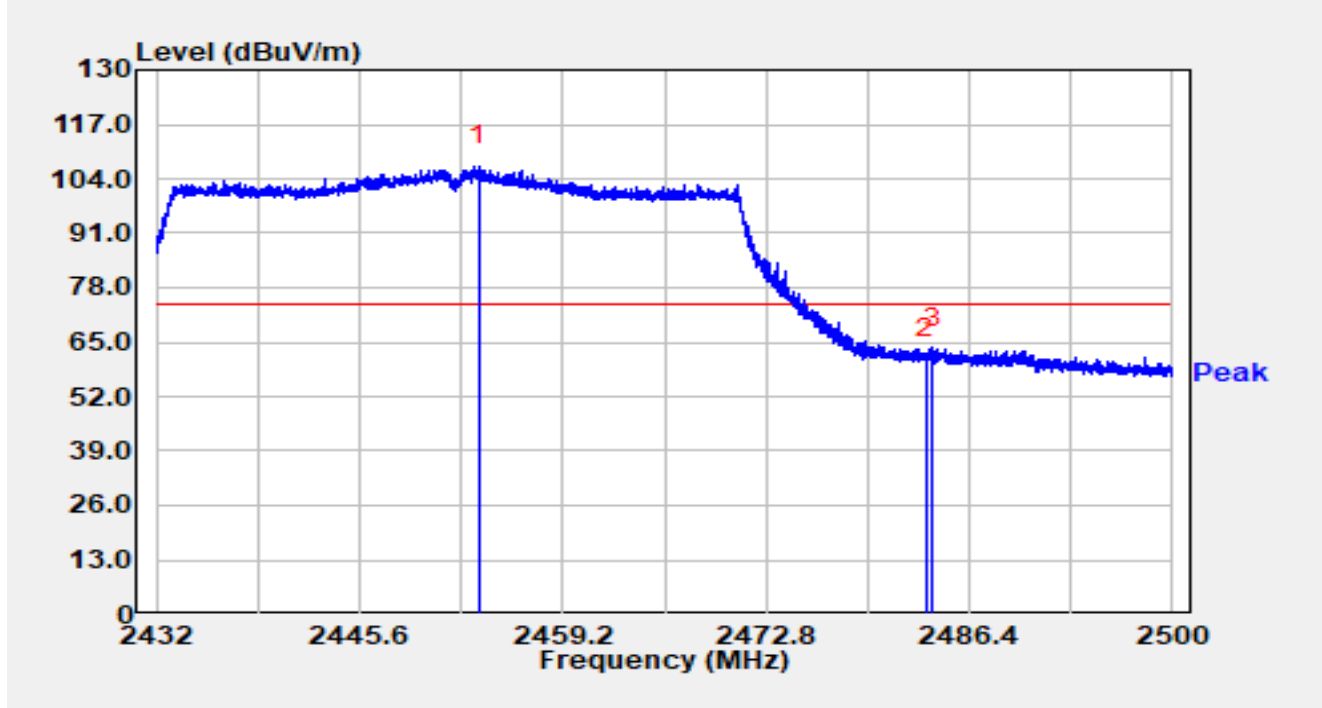


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2453.556	77.29	29.70	106.99	N/A	N/A	Peak
2		2483.500	31.37	29.76	61.13	-12.87	74.00	Peak
3	*	2483.959	33.85	29.77	63.62	-10.38	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz		

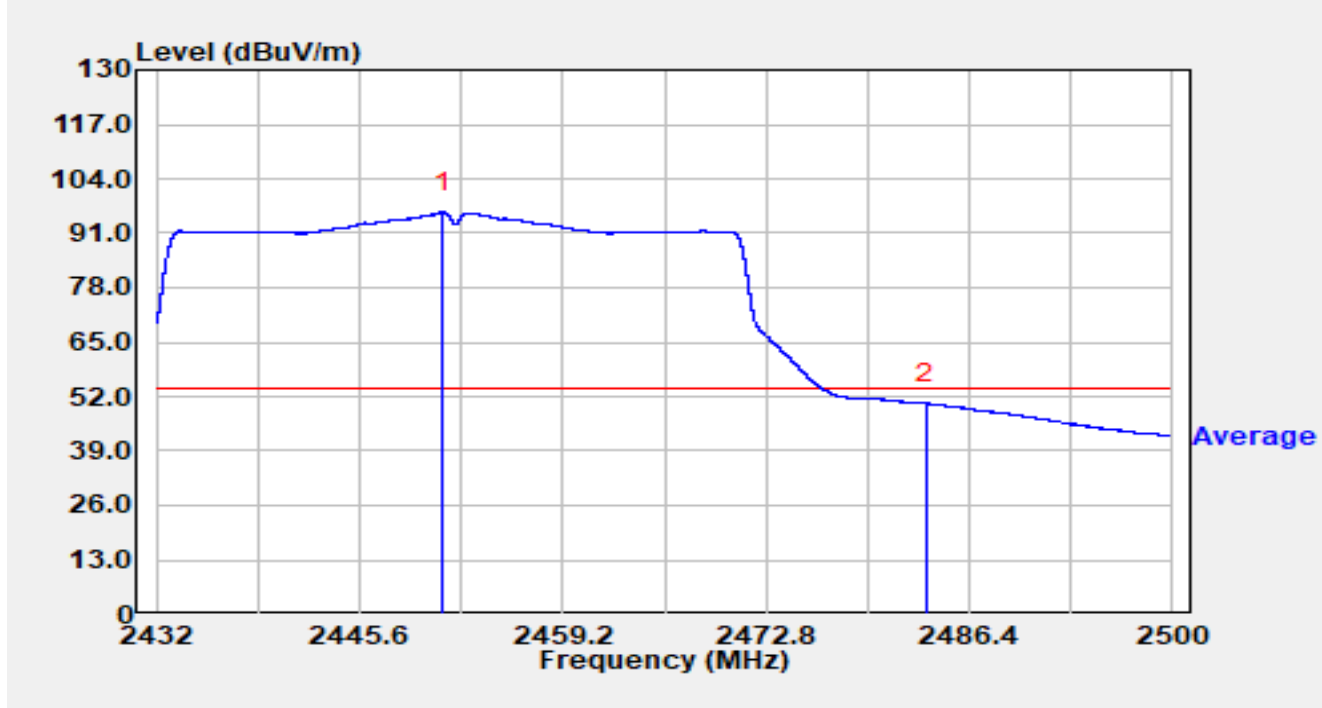


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2451.196	66.25	29.70	95.95	N/A	N/A	Average
2	*	2483.500	20.59	29.76	50.36	-3.64	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz		

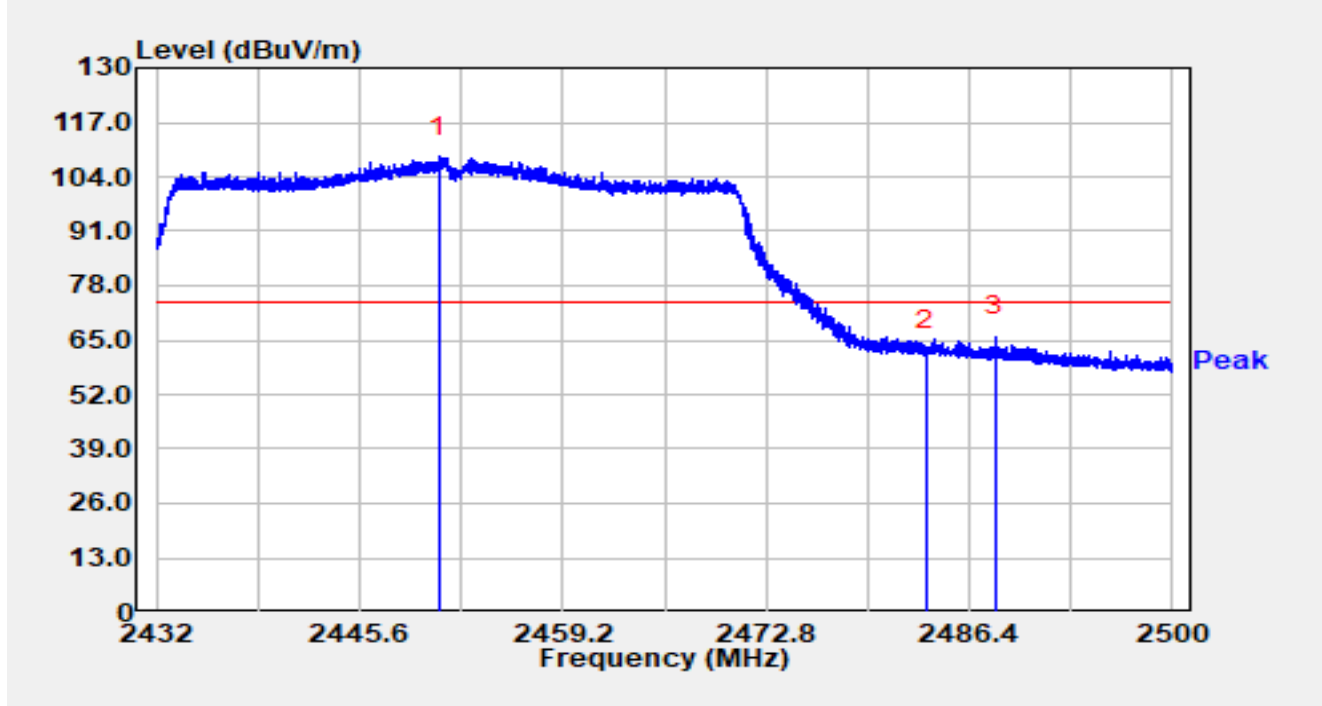


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2450.890	79.09	29.70	108.78	N/A	N/A	Peak
2		2483.500	32.94	29.76	62.71	-11.29	74.00	Peak
3	*	2488.120	36.08	29.78	65.86	-8.14	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz		

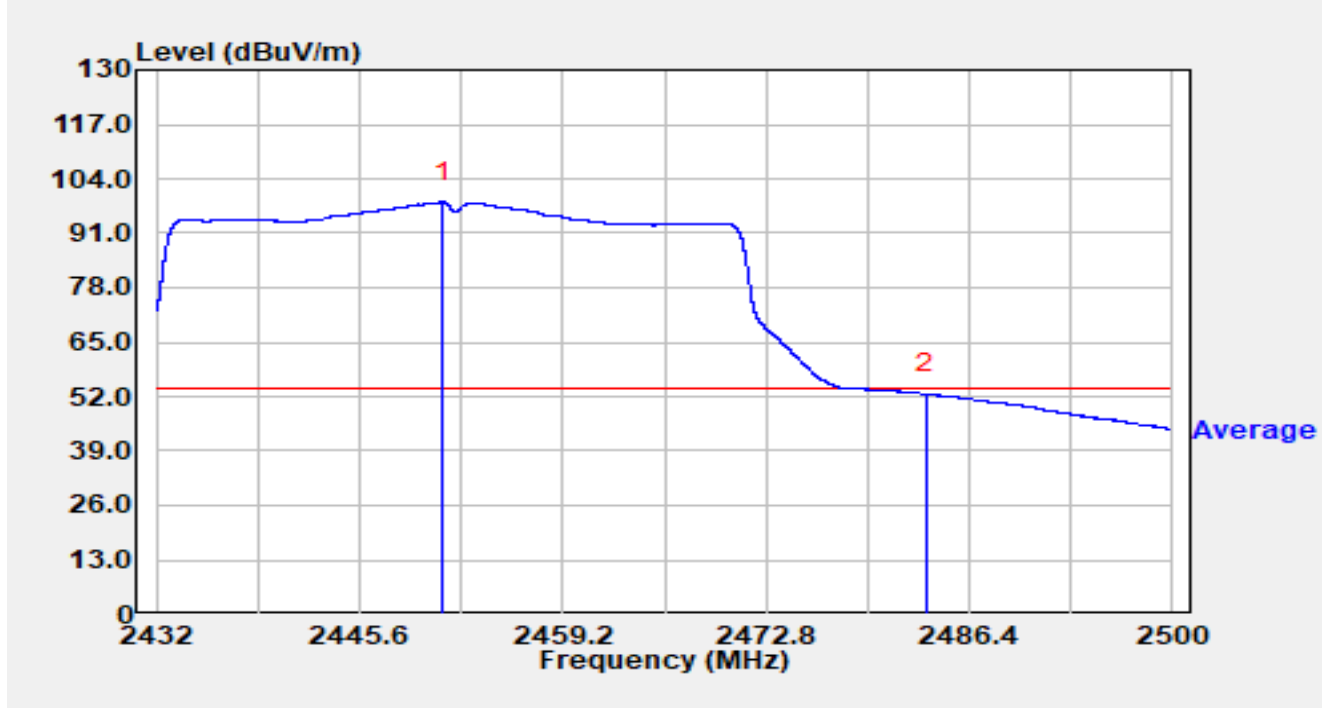


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2451.183	68.80	29.70	98.49	N/A	N/A	Average
2	*	2483.500	22.77	29.76	52.53	-1.47	54.00	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2412MHz		

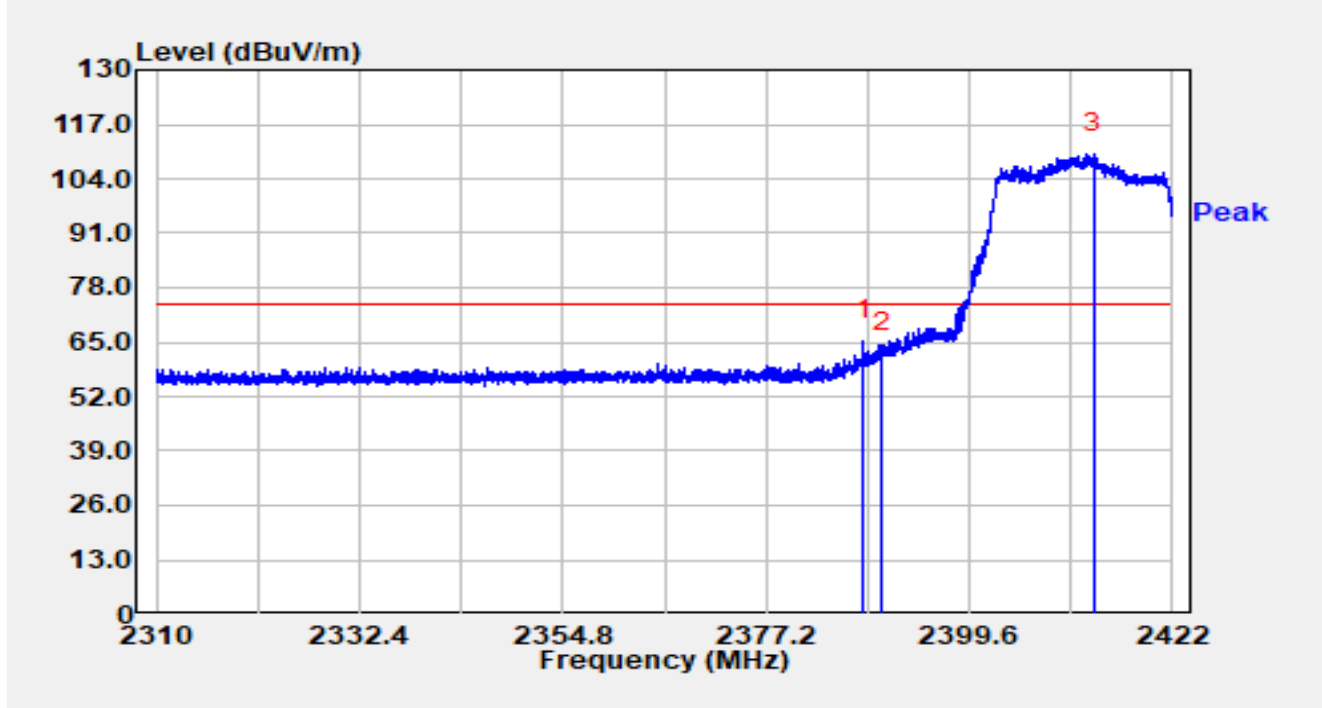


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.952	35.79	29.58	65.38	-8.62	74.00	Peak
2		2390.000	33.12	29.59	62.71	-11.29	74.00	Peak
3		2413.320	80.29	29.63	109.93	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2412MHz		

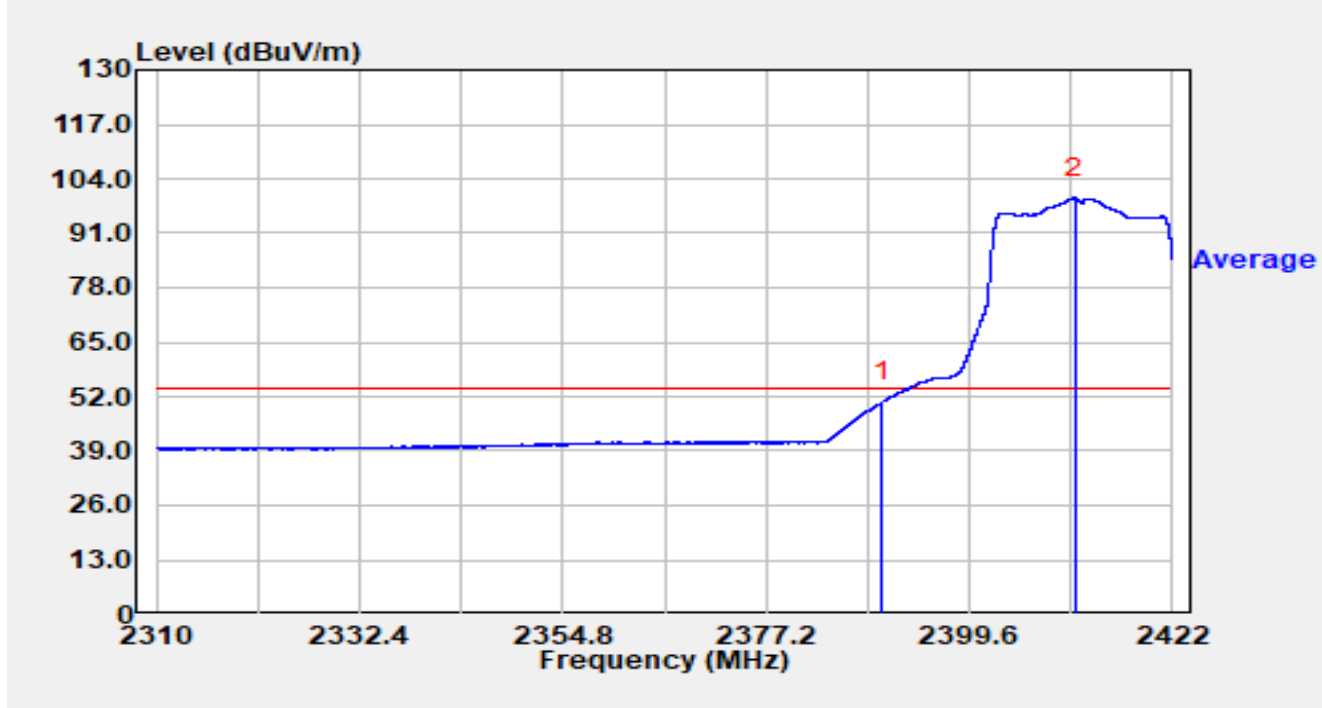


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	21.11	29.59	50.71	-3.29	54.00	Average
2		2411.304	69.80	29.63	99.44	N/A	N/A	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2412MHz		

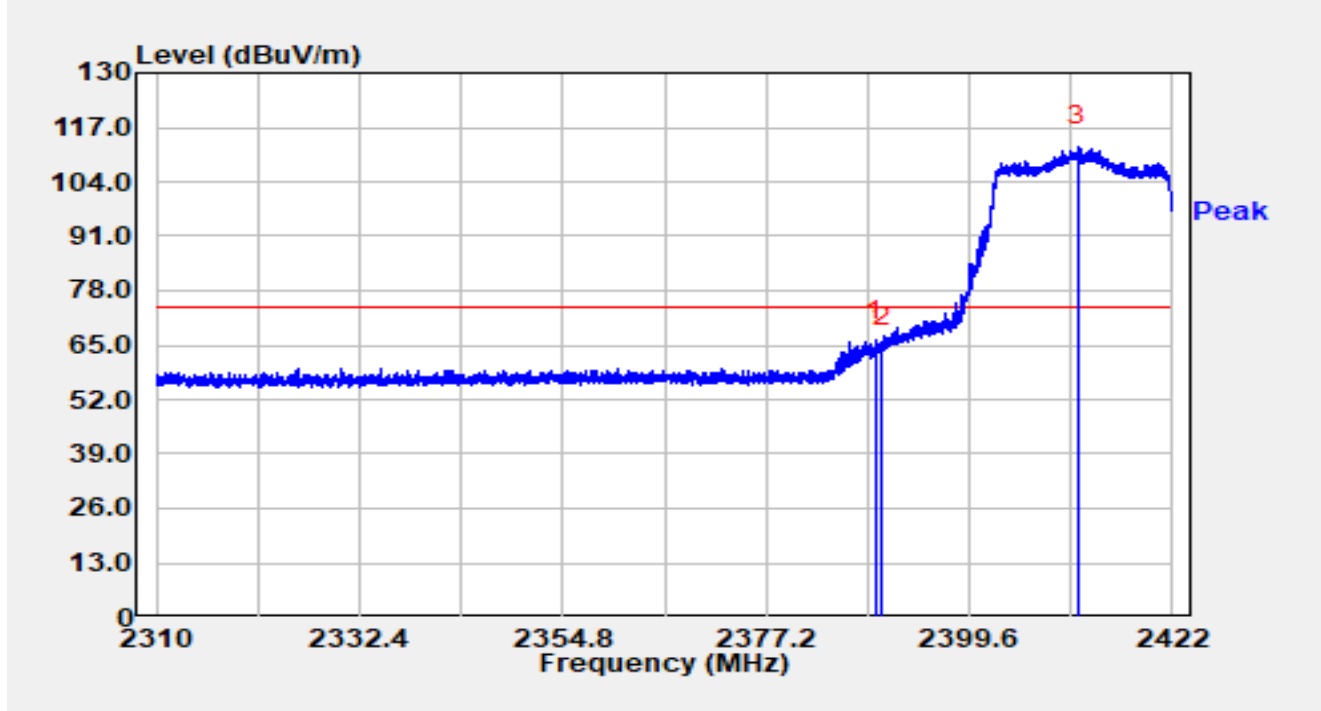


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.229	36.41	29.59	65.99	-8.01	74.00	Peak
2		2390.000	35.11	29.59	64.71	-9.29	74.00	Peak
3		2411.550	82.88	29.63	112.51	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2412MHz		

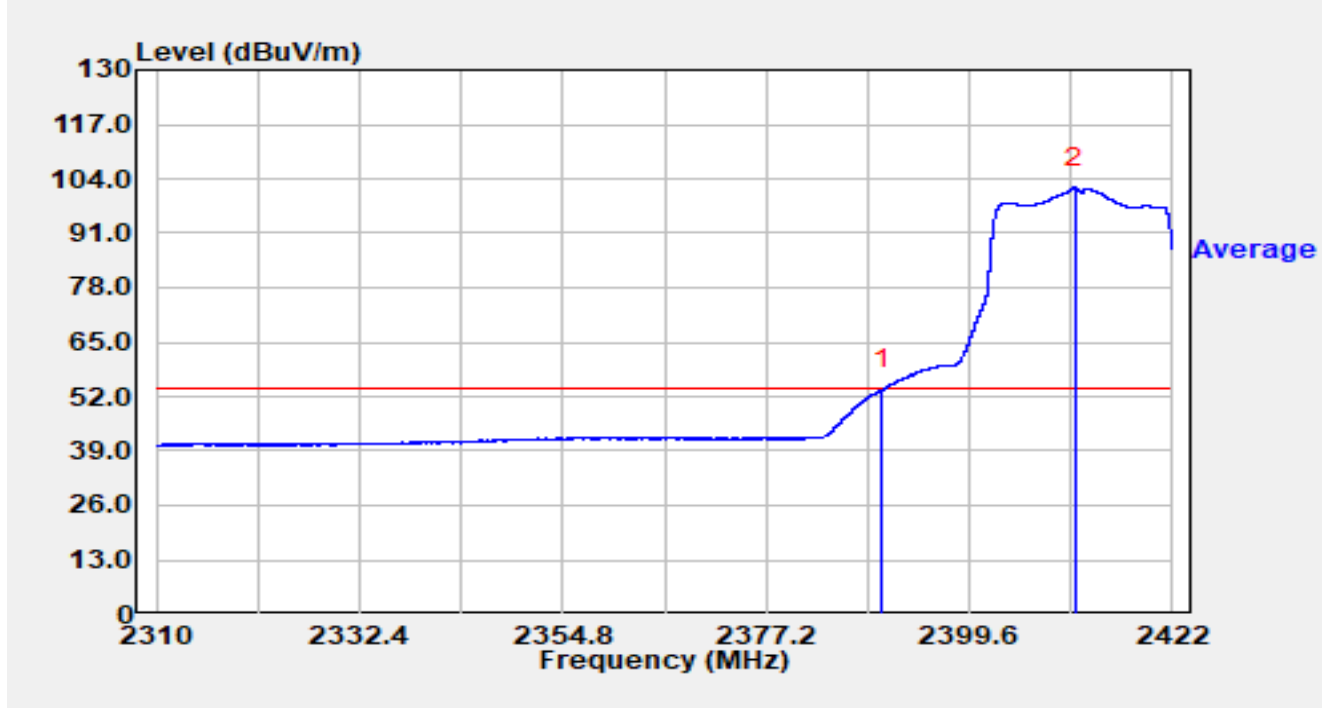


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	24.00	29.59	53.59	-0.41	54.00	Average
2		2411.237	72.23	29.63	101.87	N/A	N/A	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2417MHz		

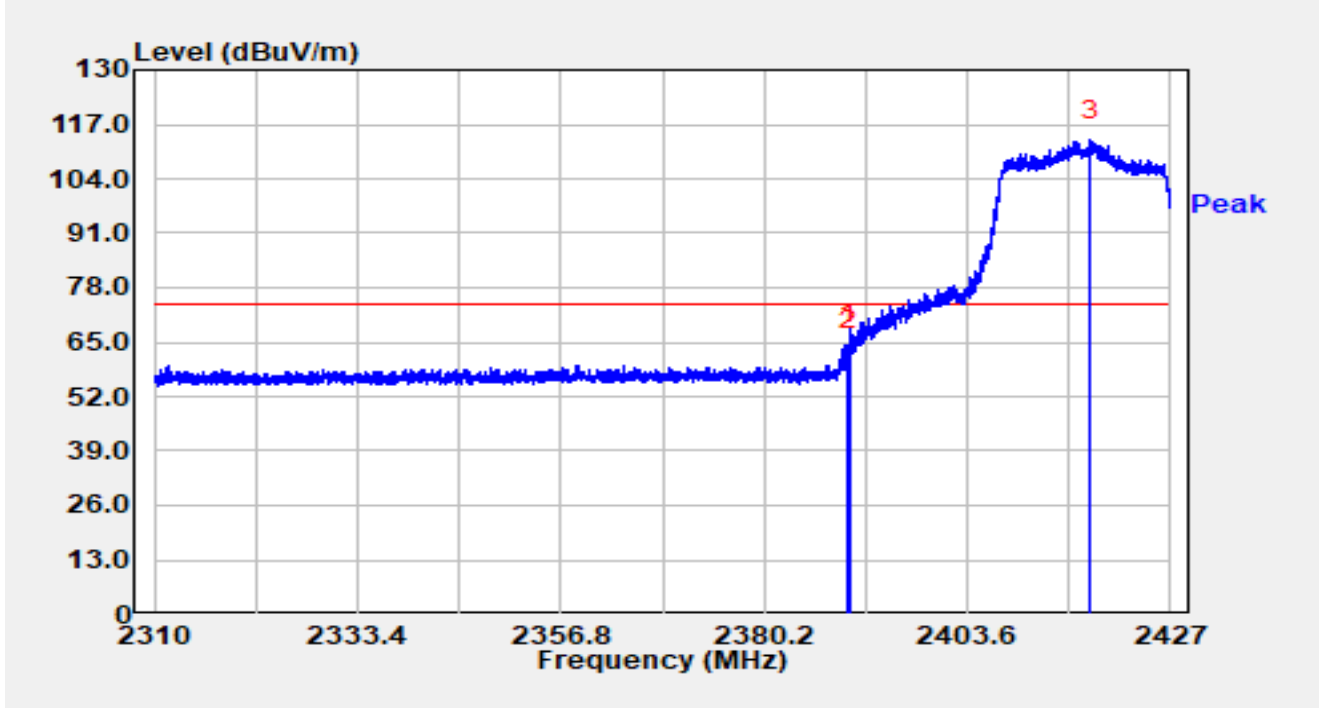


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.876	34.80	29.59	64.39	-9.61	74.00	Peak
2		2390.000	33.52	29.59	63.11	-10.89	74.00	Peak
3		2417.827	83.47	29.63	113.10	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2417MHz		

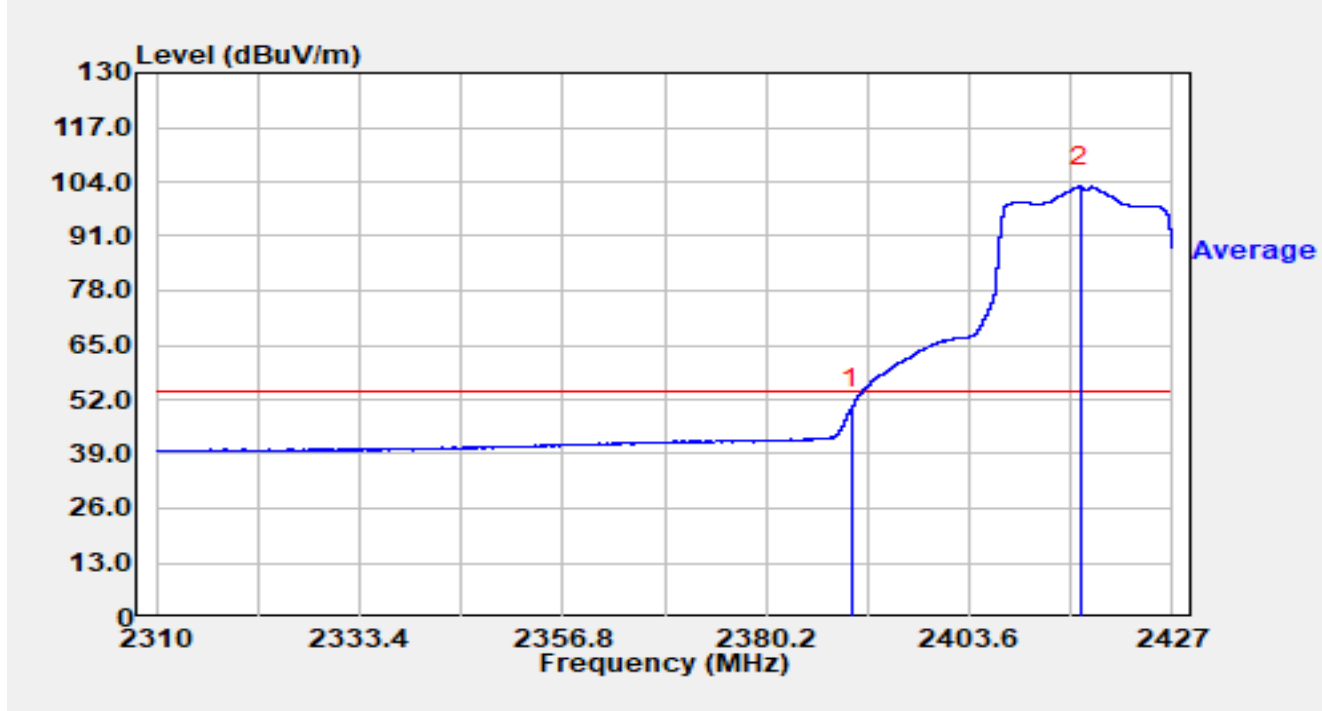


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	20.29	29.59	49.88	-4.12	54.00	Average
2		2416.341	73.22	29.63	102.85	N/A	N/A	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2417MHz		

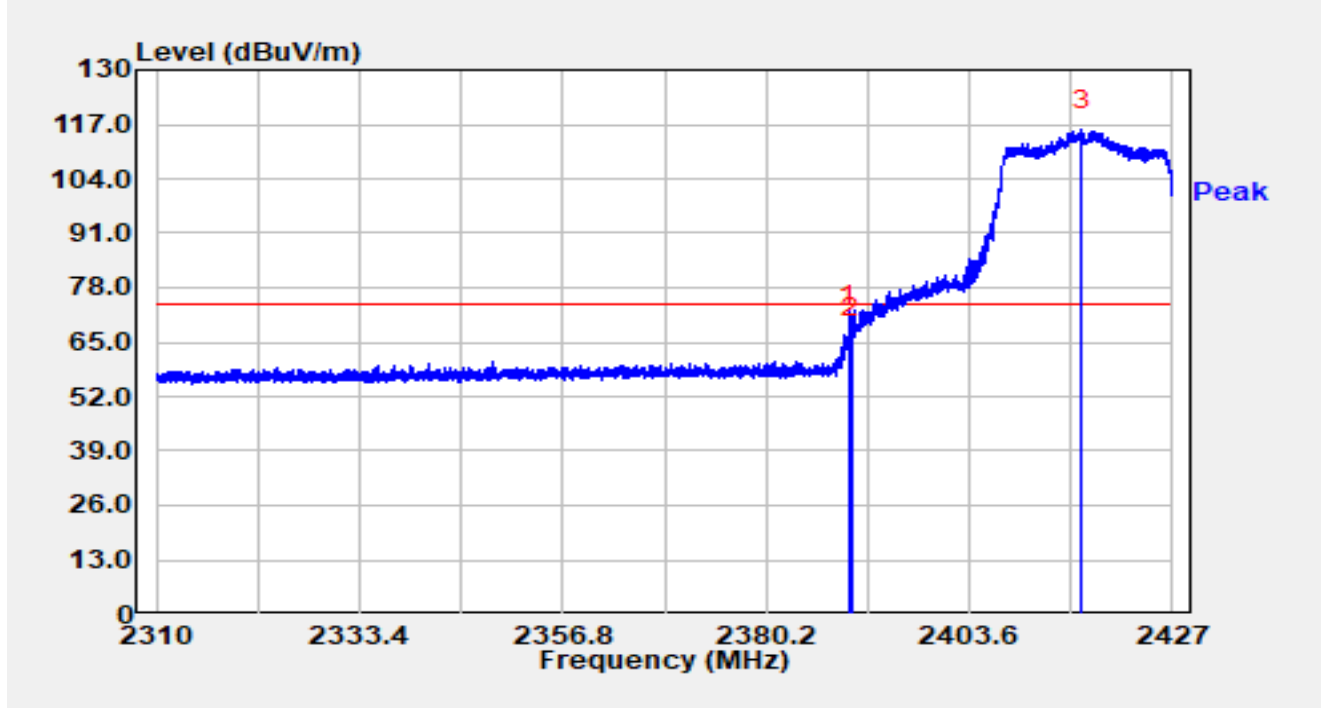


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.759	39.54	29.59	69.13	-4.87	74.00	Peak
2		2390.000	36.41	29.59	66.00	-8.00	74.00	Peak
3		2416.575	85.92	29.63	115.55	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2417MHz		

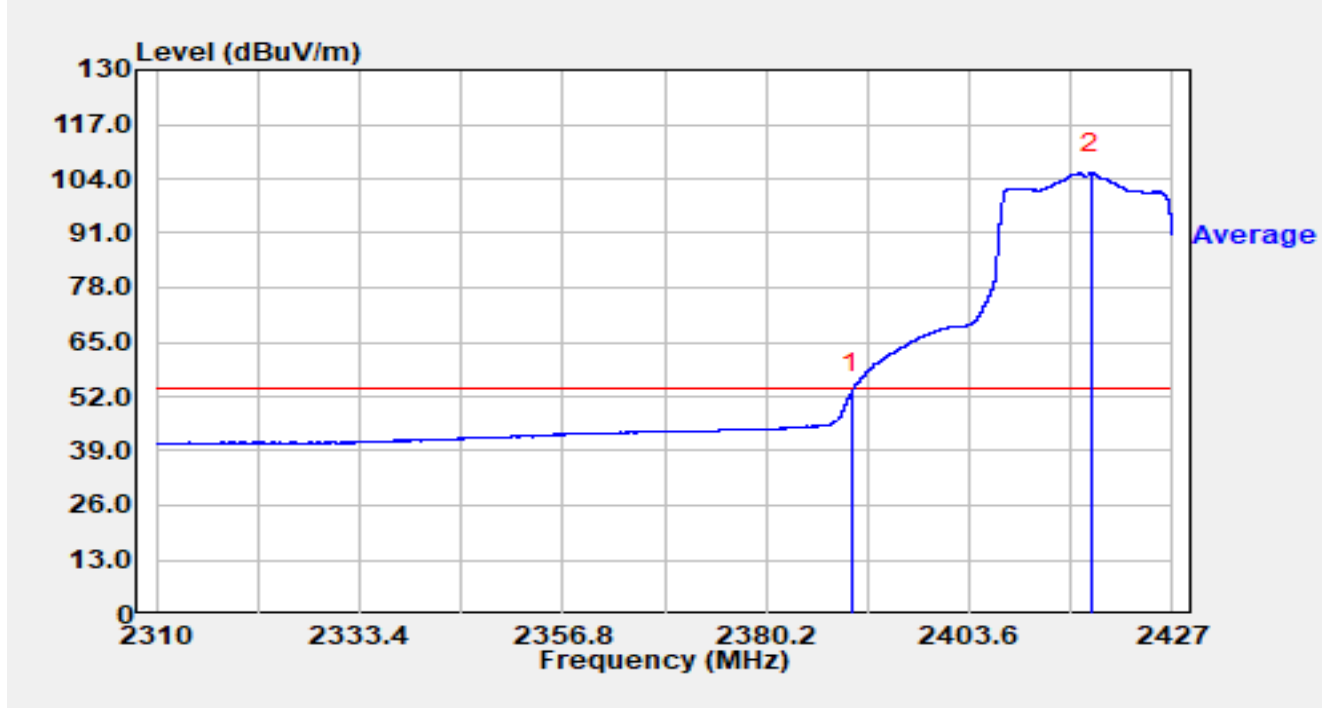


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	23.29	29.59	52.88	-1.12	54.00	Average
2		2417.687	75.73	29.63	105.36	N/A	N/A	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2422MHz		

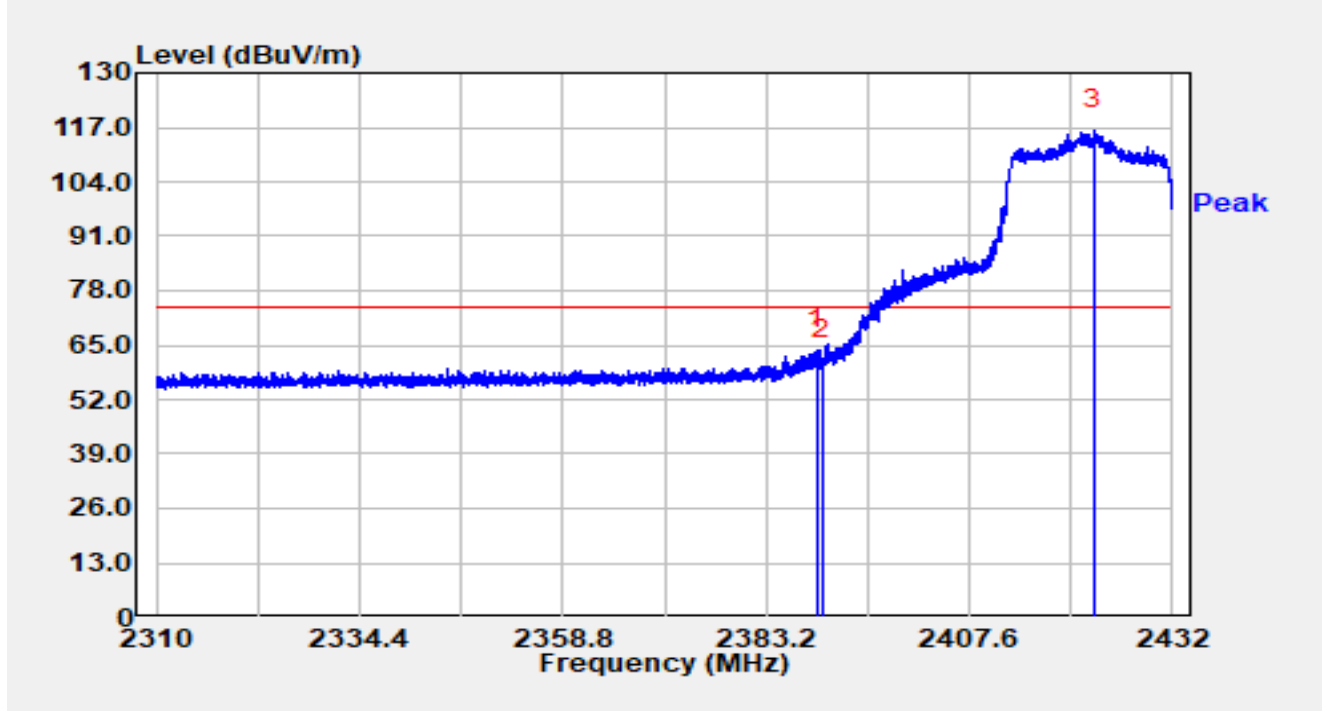


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.324	34.43	29.59	64.02	-9.98	74.00	Peak
2		2390.000	31.98	29.59	61.58	-12.42	74.00	Peak
3		2422.533	86.69	29.64	116.33	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2422MHz		

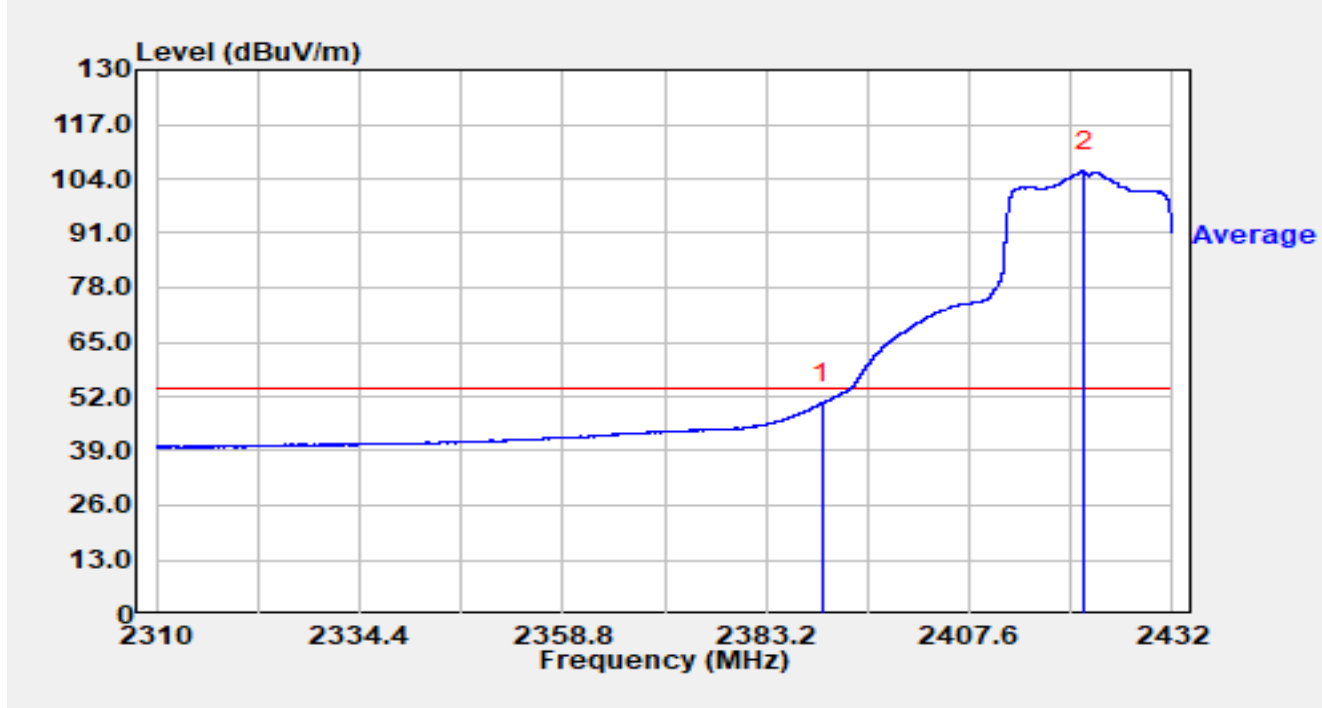


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	20.77	29.59	50.37	-3.63	54.00	Average
2		2421.362	76.22	29.63	105.86	N/A	N/A	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2422MHz		

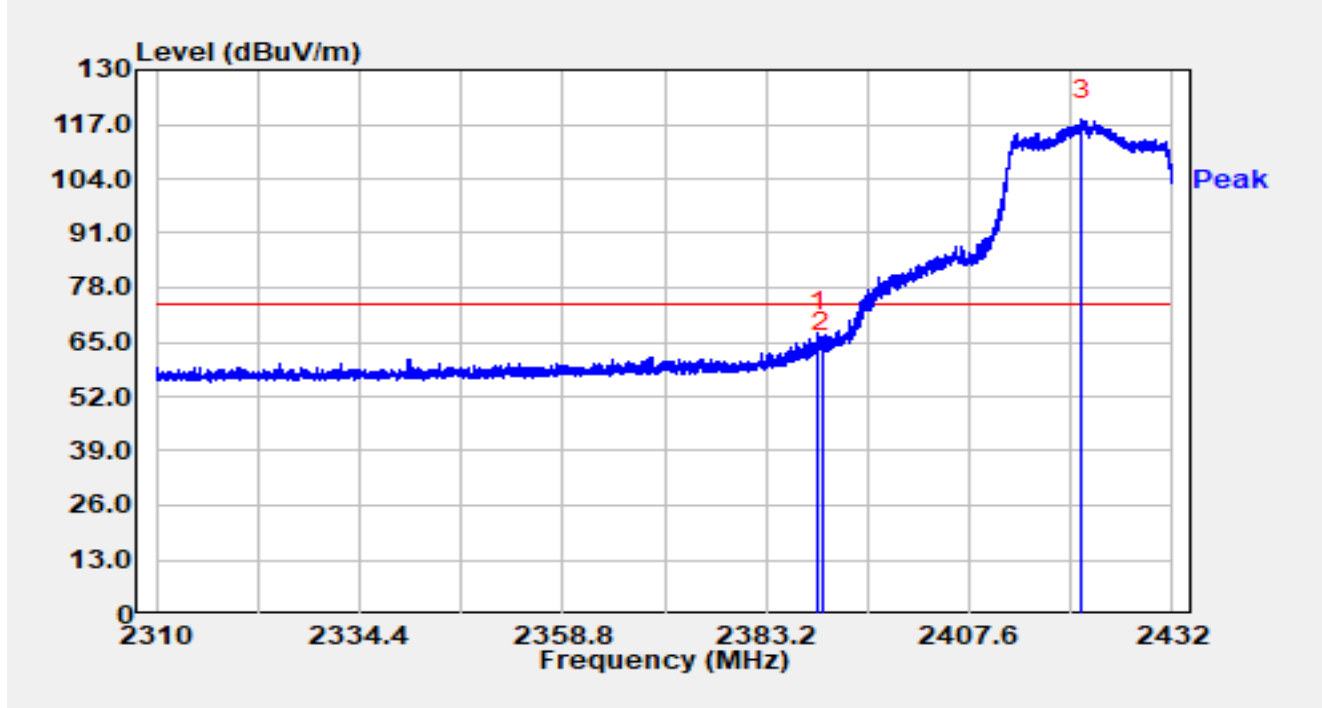


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.495	37.71	29.59	67.30	-6.70	74.00	Peak
2		2390.000	32.79	29.59	62.39	-11.61	74.00	Peak
3		2421.081	88.57	29.63	118.20	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2422MHz		

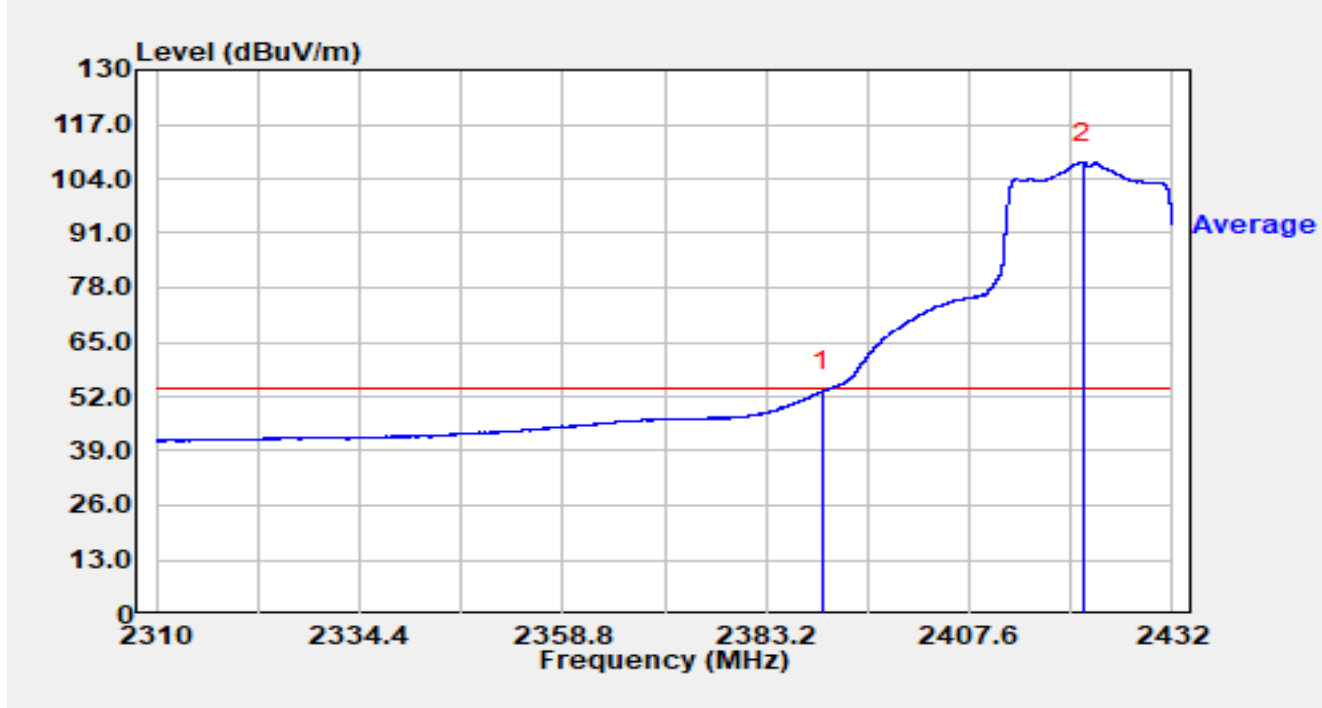


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	23.64	29.59	53.23	-0.77	54.00	Average
2		2421.264	78.27	29.63	107.90	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2437MHz		

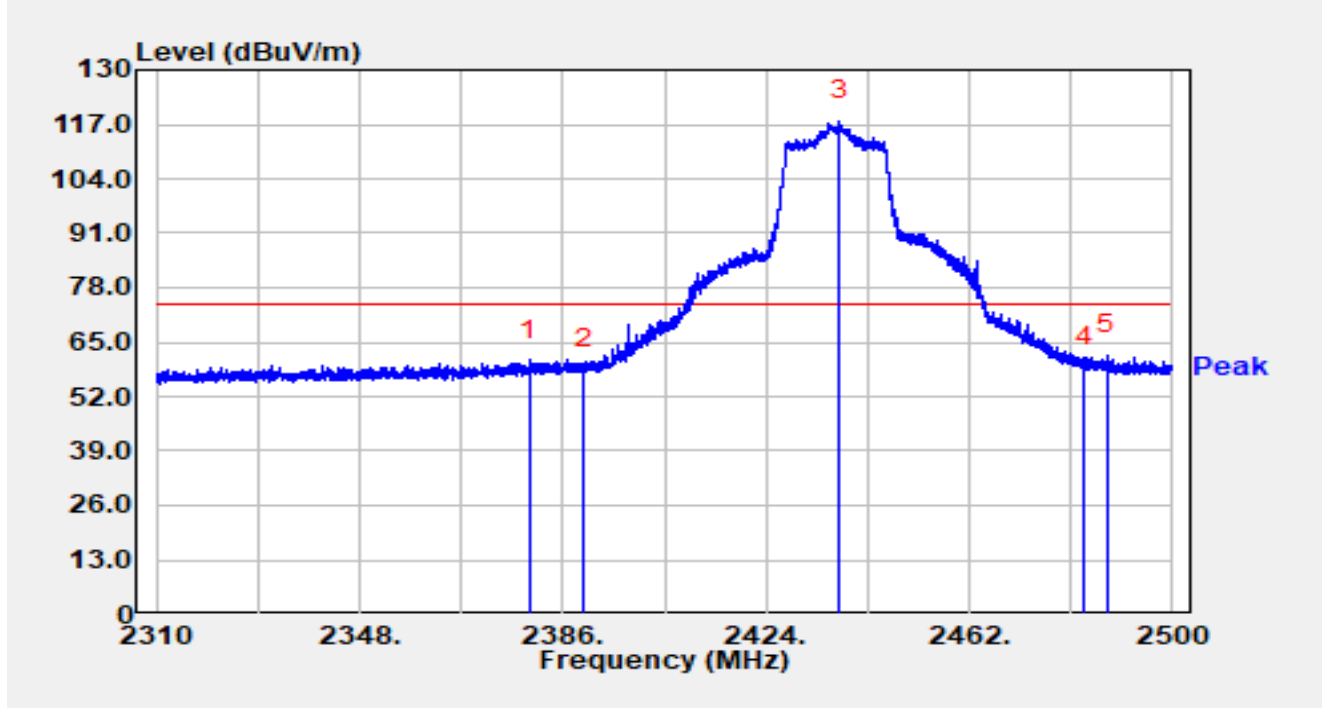


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2379.863	31.23	29.57	60.80	-13.20	74.00	Peak
2		2390.000	28.82	29.59	58.41	-15.59	74.00	Peak
3		2437.756	88.19	29.68	117.86	N/A	N/A	Peak
4		2483.500	29.37	29.76	59.14	-14.86	74.00	Peak
5	*	2487.821	32.07	29.78	61.85	-12.15	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2437MHz		

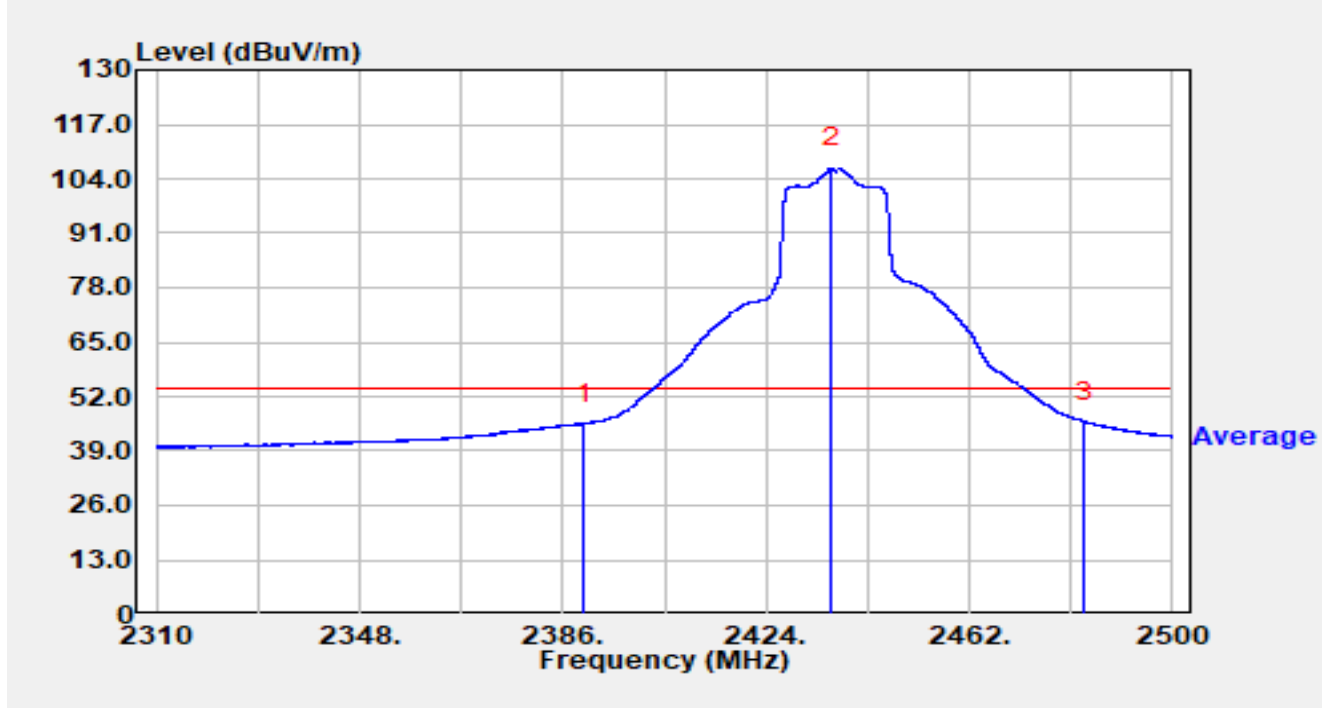


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2390.000	16.01	29.59	45.60	-8.40	54.00	Average
2		2436.274	76.93	29.67	106.60	N/A	N/A	Average
3	*	2483.500	16.29	29.76	46.05	-7.95	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2437MHz		

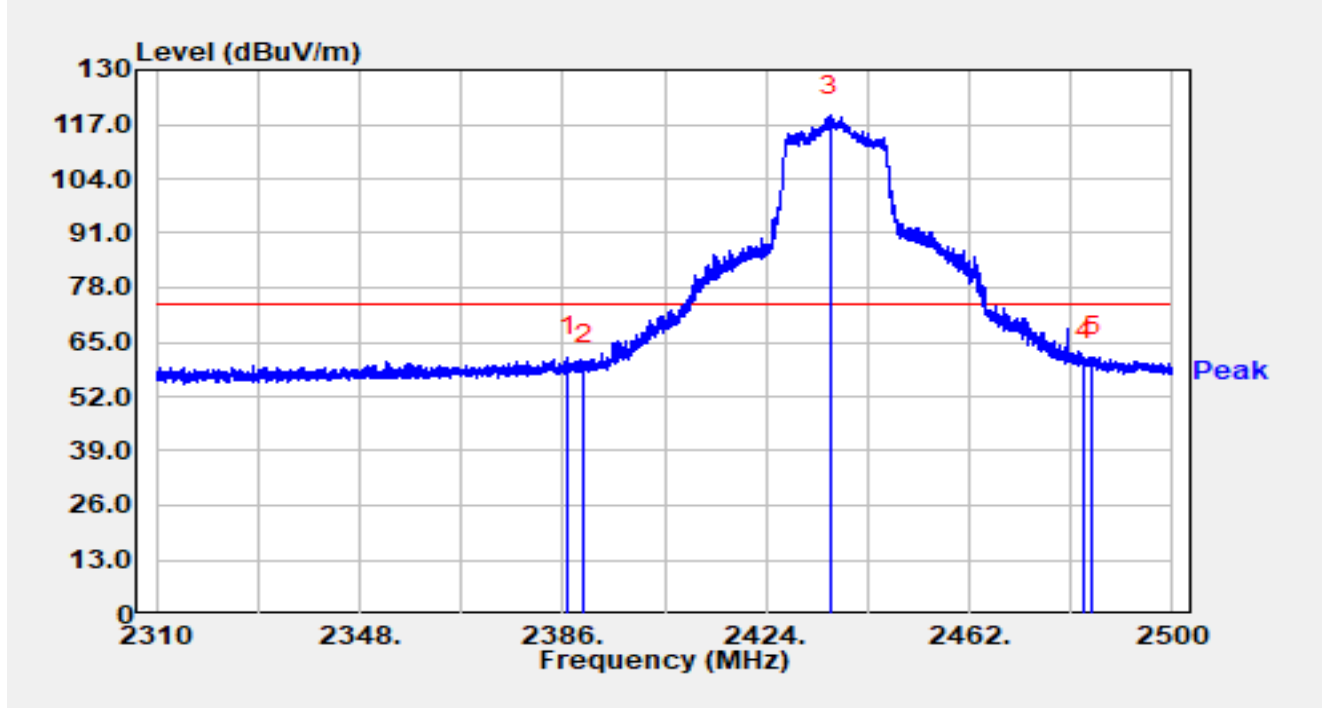


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2386.969	31.82	29.58	61.40	-12.60	74.00	Peak
2		2390.000	30.09	29.59	59.68	-14.32	74.00	Peak
3		2435.970	89.34	29.67	119.01	N/A	N/A	Peak
4		2483.500	30.72	29.76	60.48	-13.52	74.00	Peak
5	*	2484.895	31.78	29.77	61.55	-12.45	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2437MHz		

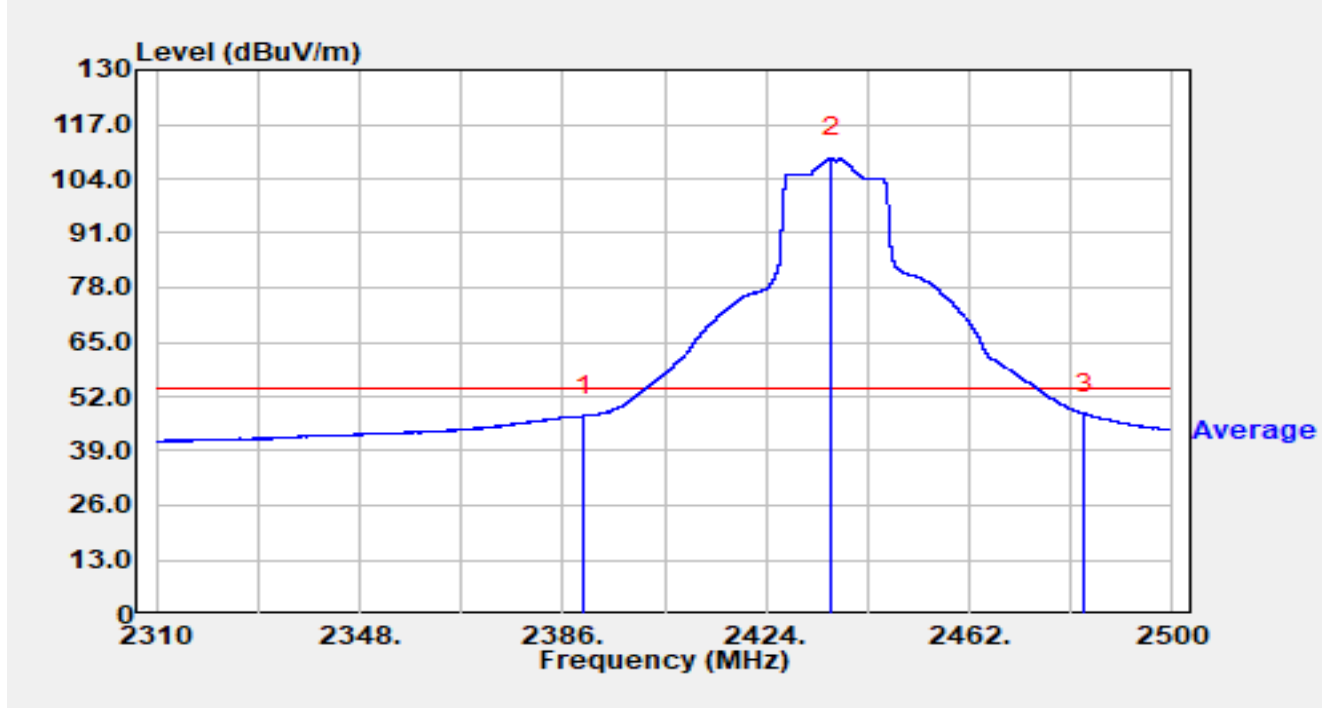


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2390.000	17.86	29.59	47.46	-6.54	54.00	Average
2		2436.312	79.40	29.67	109.07	N/A	N/A	Average
3	*	2483.500	18.20	29.76	47.96	-6.04	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2452MHz		

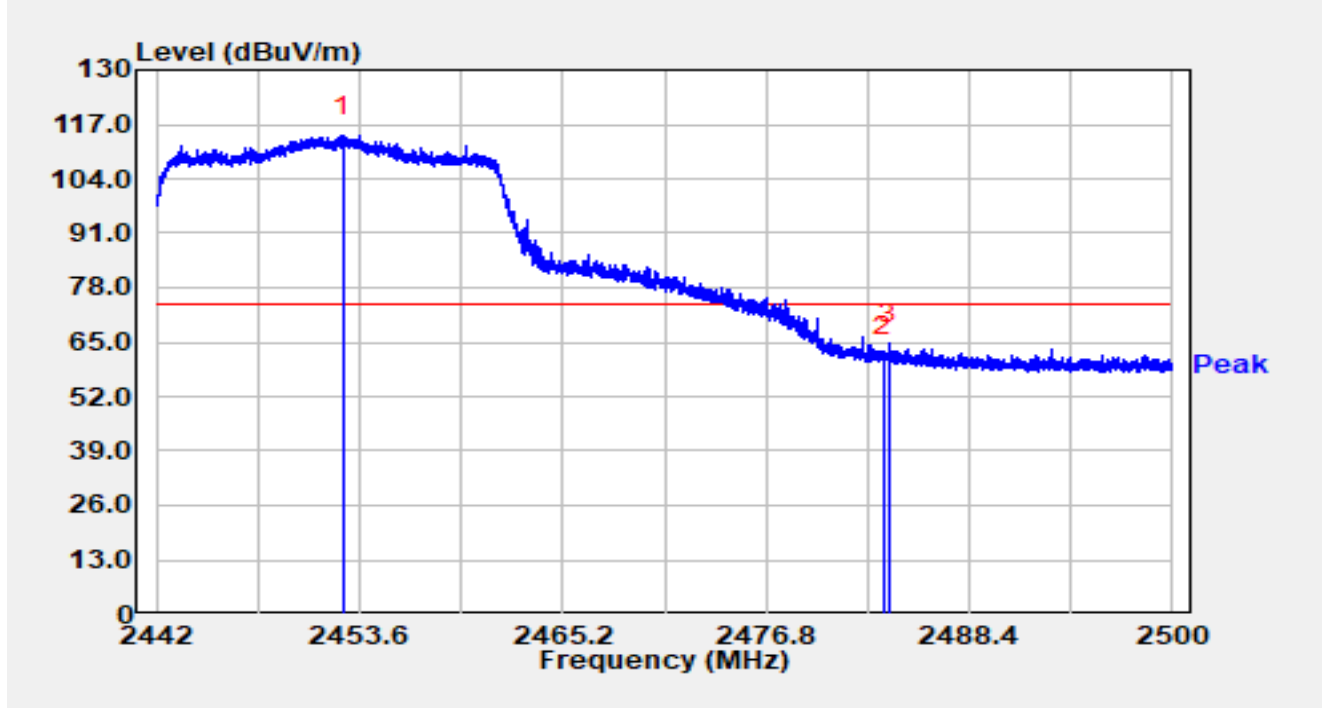


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2452.643	84.59	29.70	114.29	N/A	N/A	Peak
2		2483.500	31.88	29.76	61.64	-12.36	74.00	Peak
3	*	2483.818	34.98	29.77	64.75	-9.25	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2452MHz		

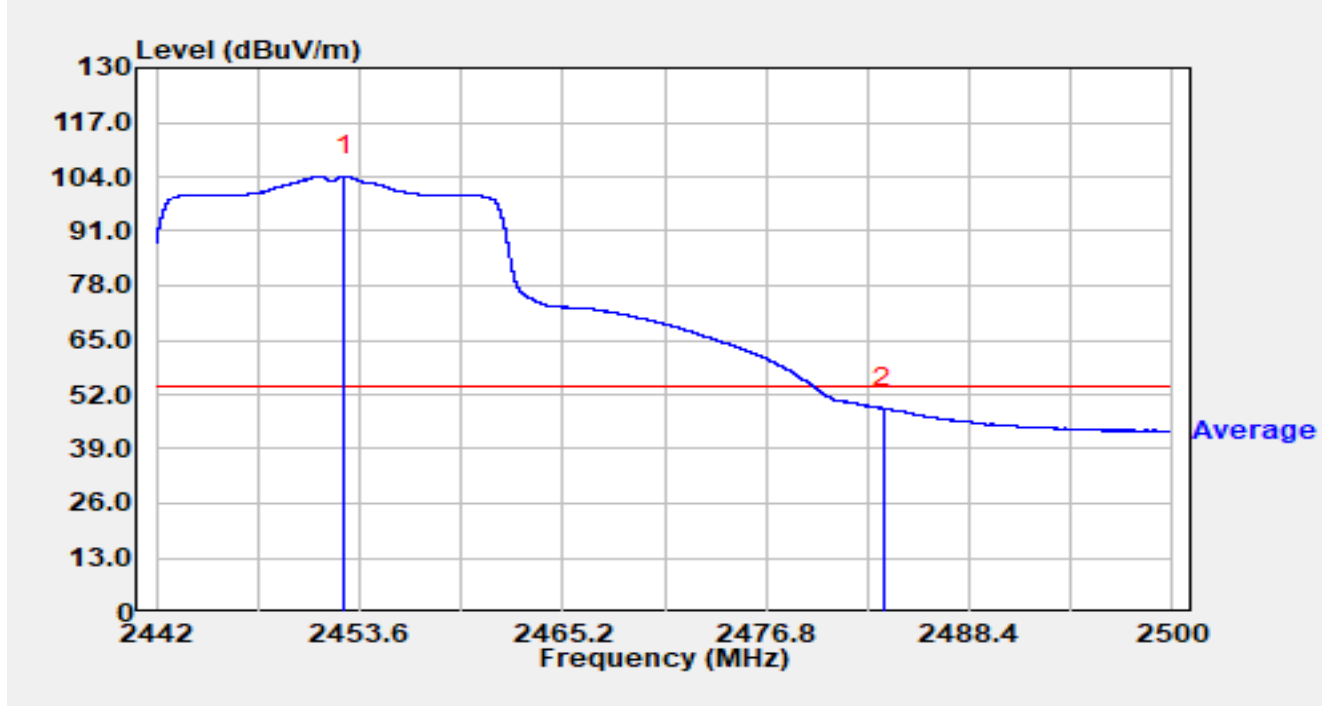


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2452.707	74.40	29.70	104.10	N/A	N/A	Average
2	*	2483.500	18.81	29.76	48.57	-5.43	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2452MHz		

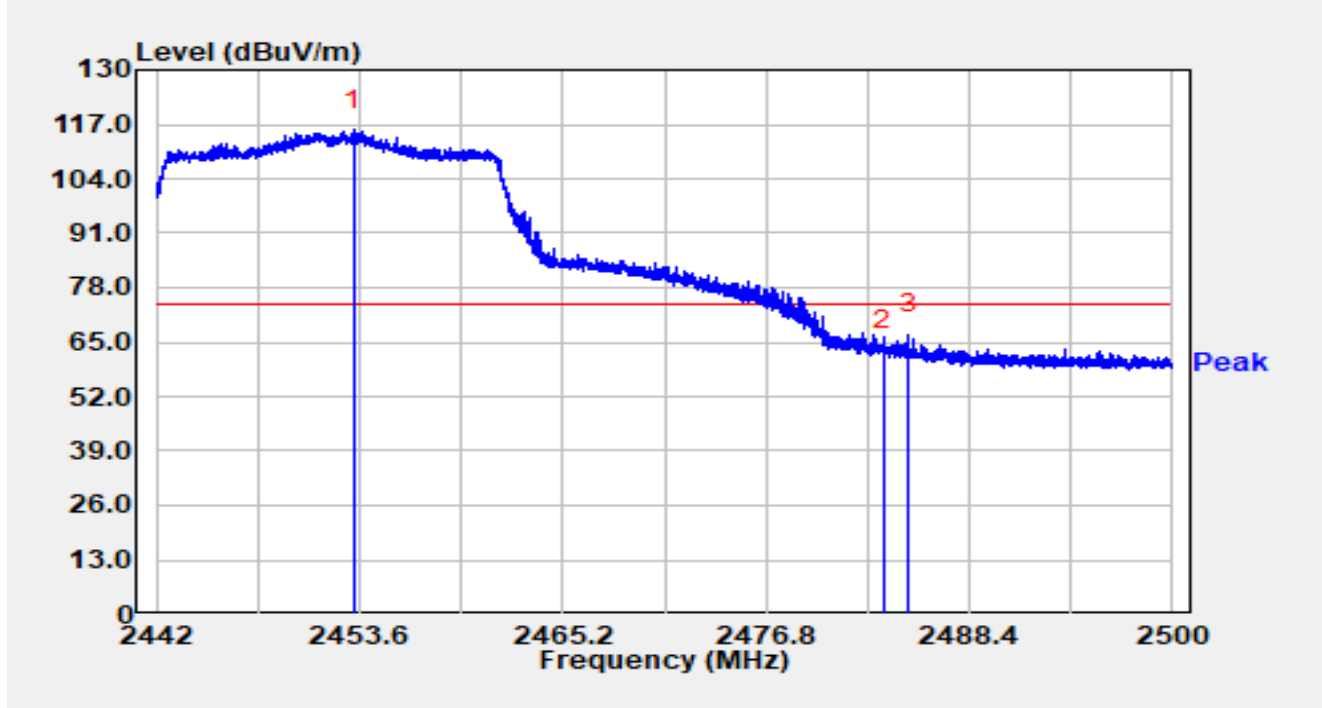


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2453.298	85.88	29.70	115.57	N/A	N/A	Peak
2		2483.500	33.09	29.76	62.86	-11.14	74.00	Peak
3	*	2484.938	37.13	29.77	66.90	-7.10	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2452MHz		

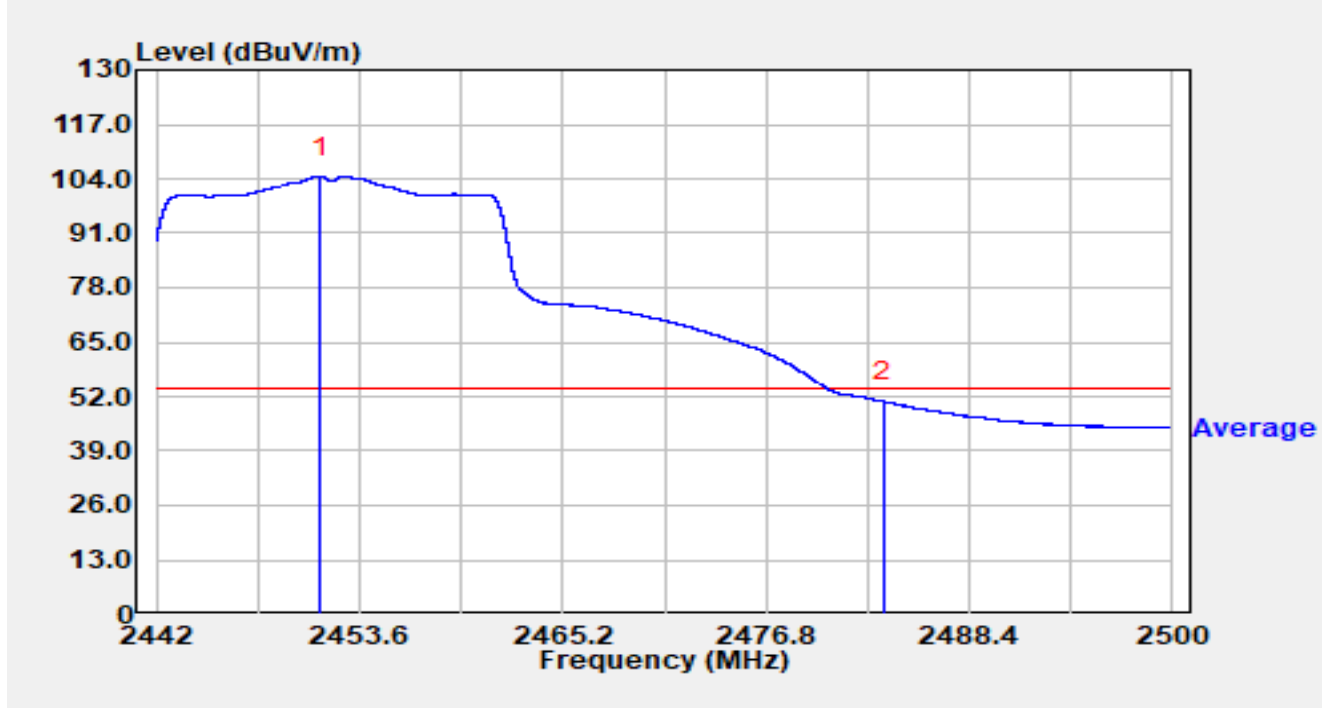


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2451.385	74.79	29.70	104.49	N/A	N/A	Average
2	*	2483.500	21.04	29.76	50.80	-3.20	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2457MHz		

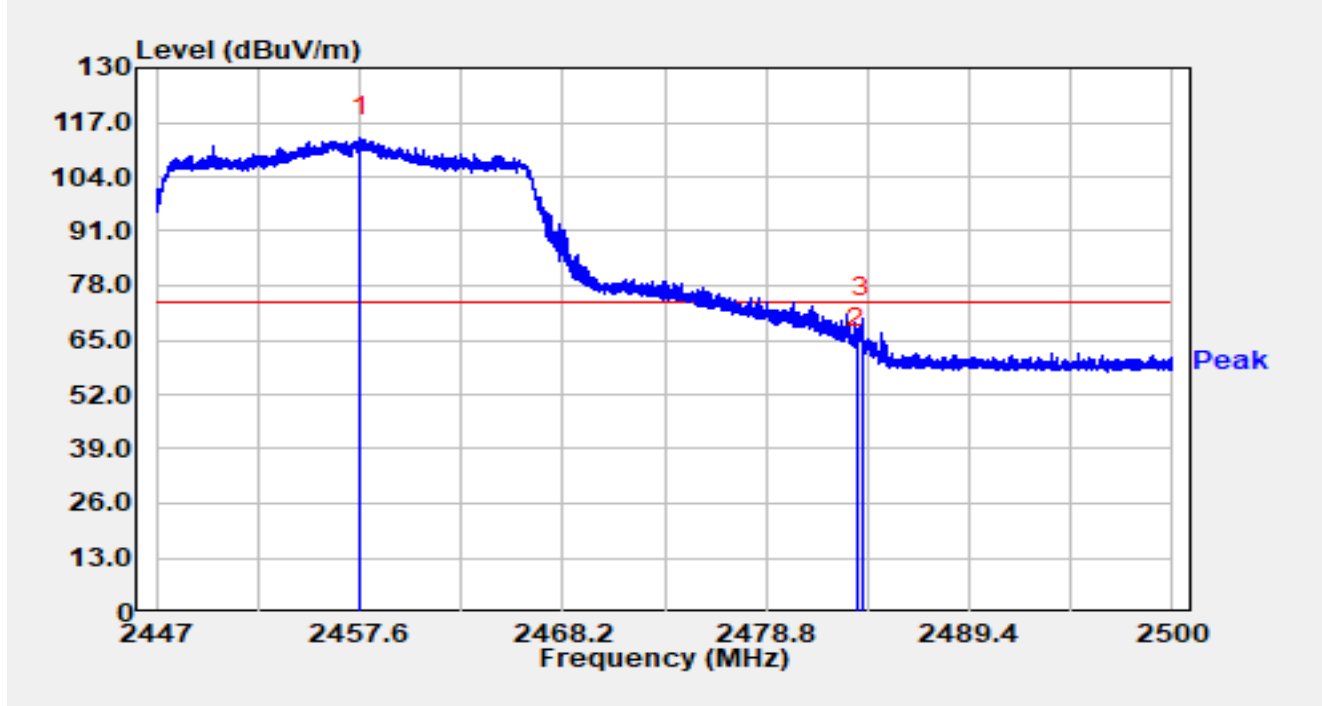


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2457.664	83.76	29.70	113.47	N/A	N/A	Peak
2		2483.500	33.45	29.76	63.21	-10.79	74.00	Peak
3	*	2483.814	40.43	29.77	70.20	-3.80	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2457MHz		

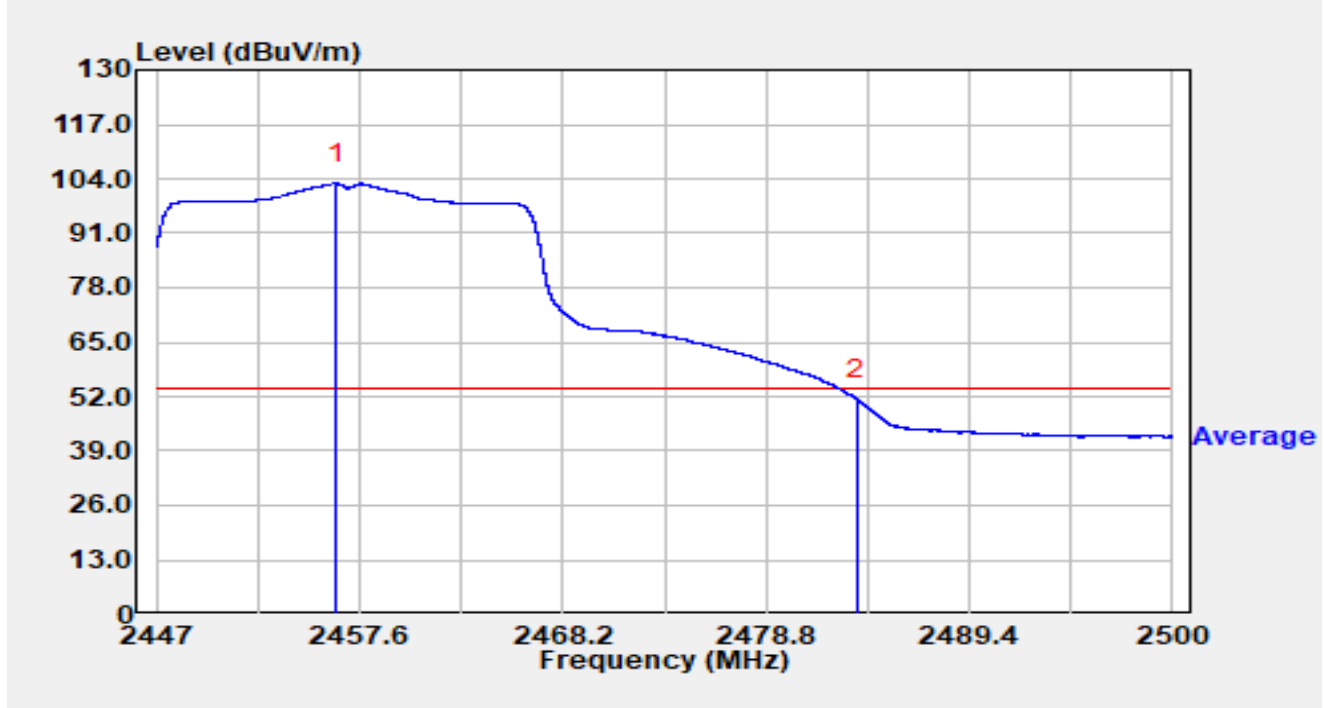


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2456.365	73.13	29.70	102.84	N/A	N/A	Average
2	*	2483.500	21.59	29.76	51.36	-2.64	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2457MHz		

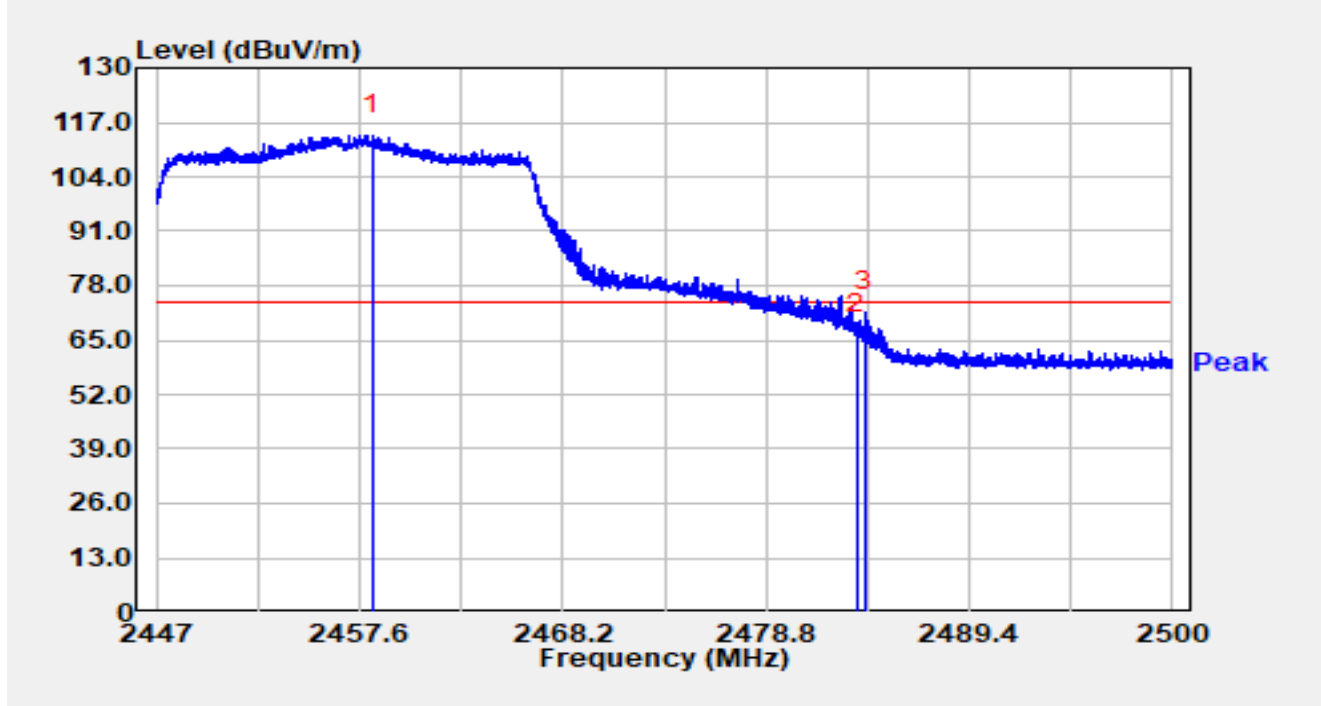


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2458.278	84.34	29.71	114.04	N/A	N/A	Peak
2		2483.500	36.91	29.76	66.67	-7.33	74.00	Peak
3	*	2483.941	41.91	29.77	71.67	-2.33	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2457MHz		

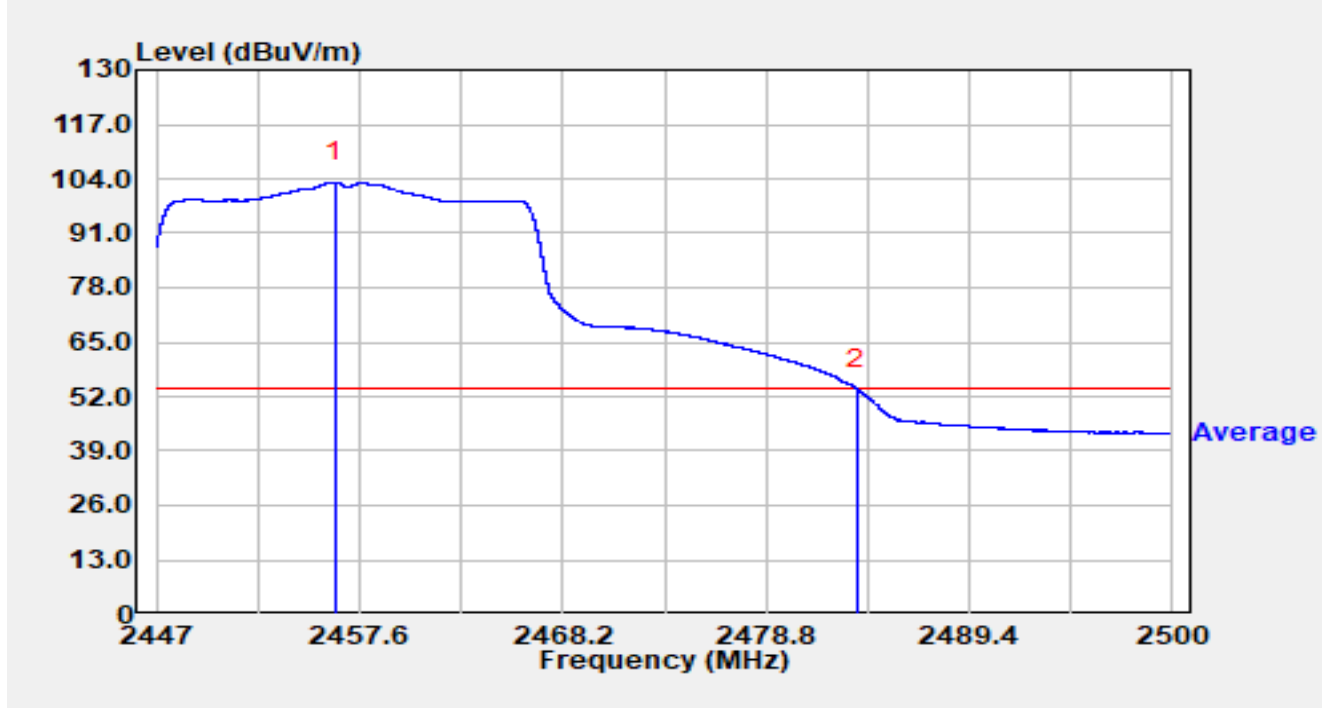


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2456.349	73.41	29.70	103.11	N/A	N/A	Average
2	*	2483.500	24.04	29.76	53.80	-0.20	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2462MHz		

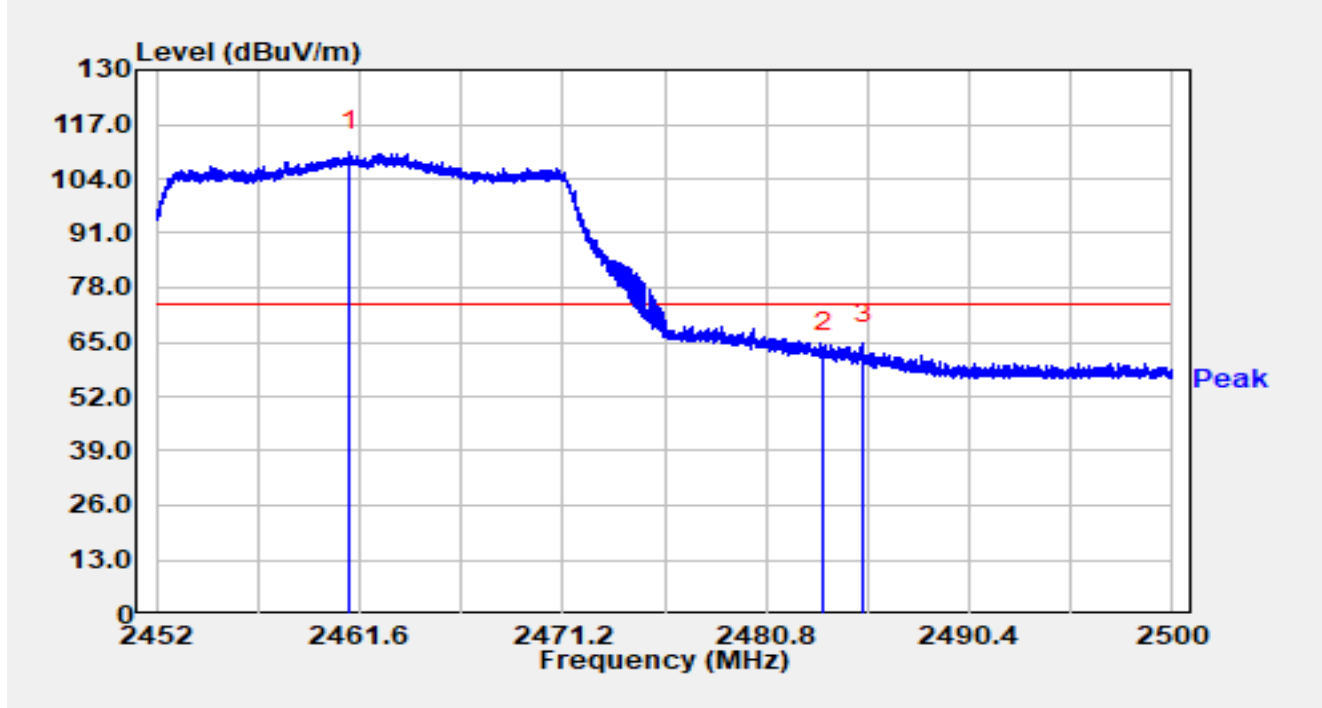


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.110	80.82	29.71	110.53	N/A	N/A	Peak
2		2483.500	32.61	29.76	62.37	-11.63	74.00	Peak
3	*	2485.403	34.96	29.77	64.73	-9.27	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2462MHz		

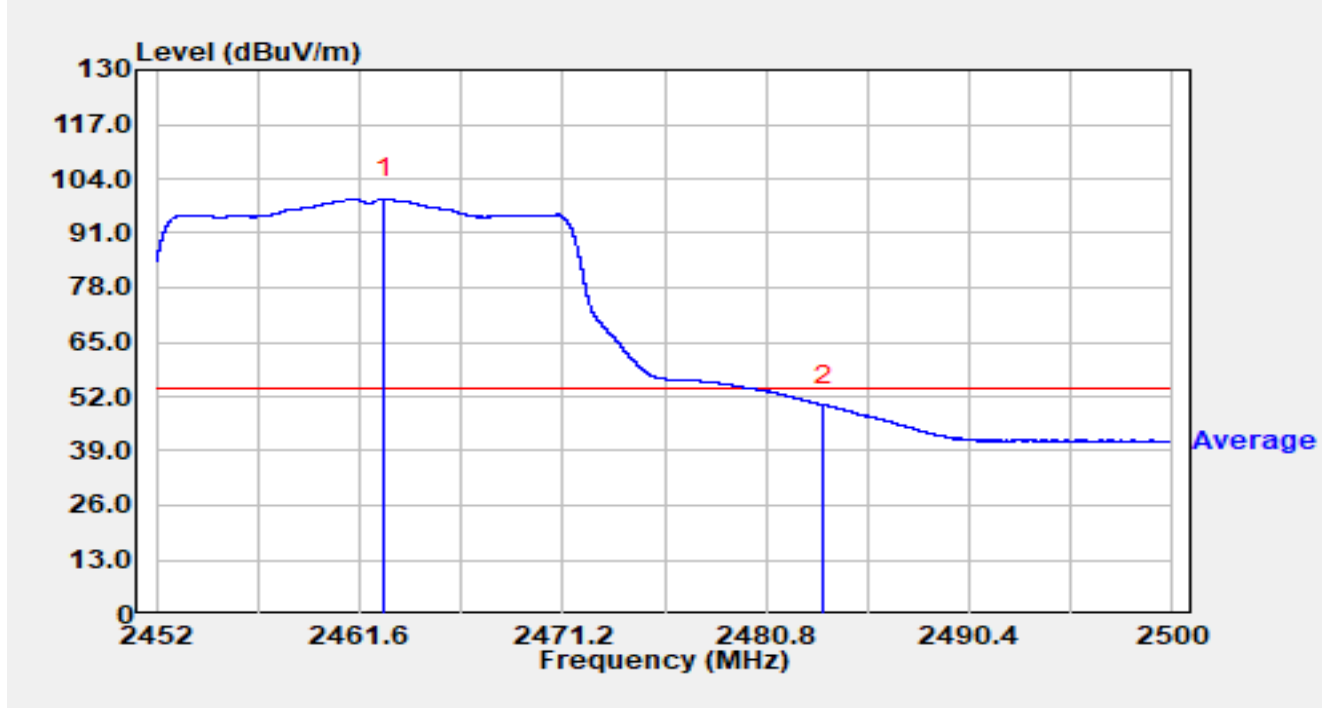


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.786	69.44	29.71	99.15	N/A	N/A	Average
2	*	2483.500	20.24	29.76	50.01	-3.99	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2462MHz		

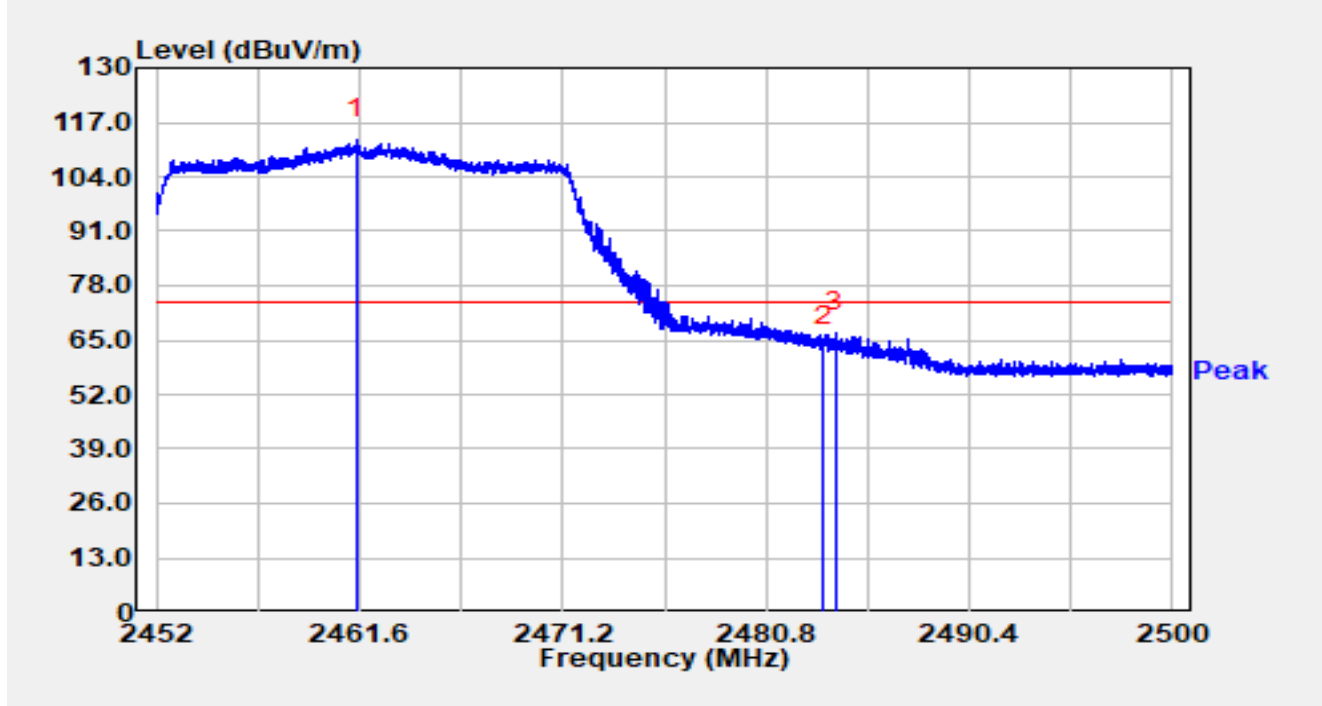


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.456	83.29	29.71	113.01	N/A	N/A	Peak
2		2483.500	33.78	29.76	63.55	-10.45	74.00	Peak
3	*	2484.078	37.14	29.77	66.91	-7.09	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-07
Temperature	24.6 °C	Humidity	25.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2462MHz		

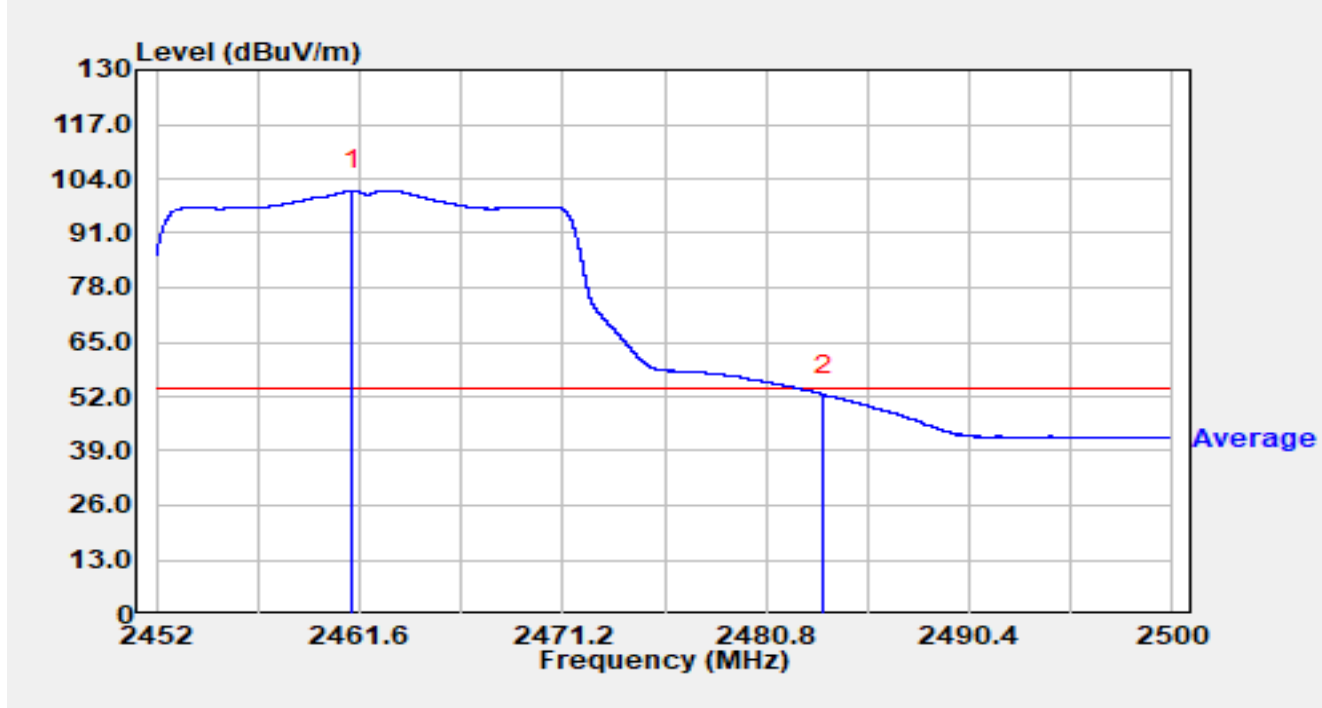


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.283	71.56	29.71	101.27	N/A	N/A	Average
2	*	2483.500	22.64	29.76	52.40	-1.60	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2422MHz		

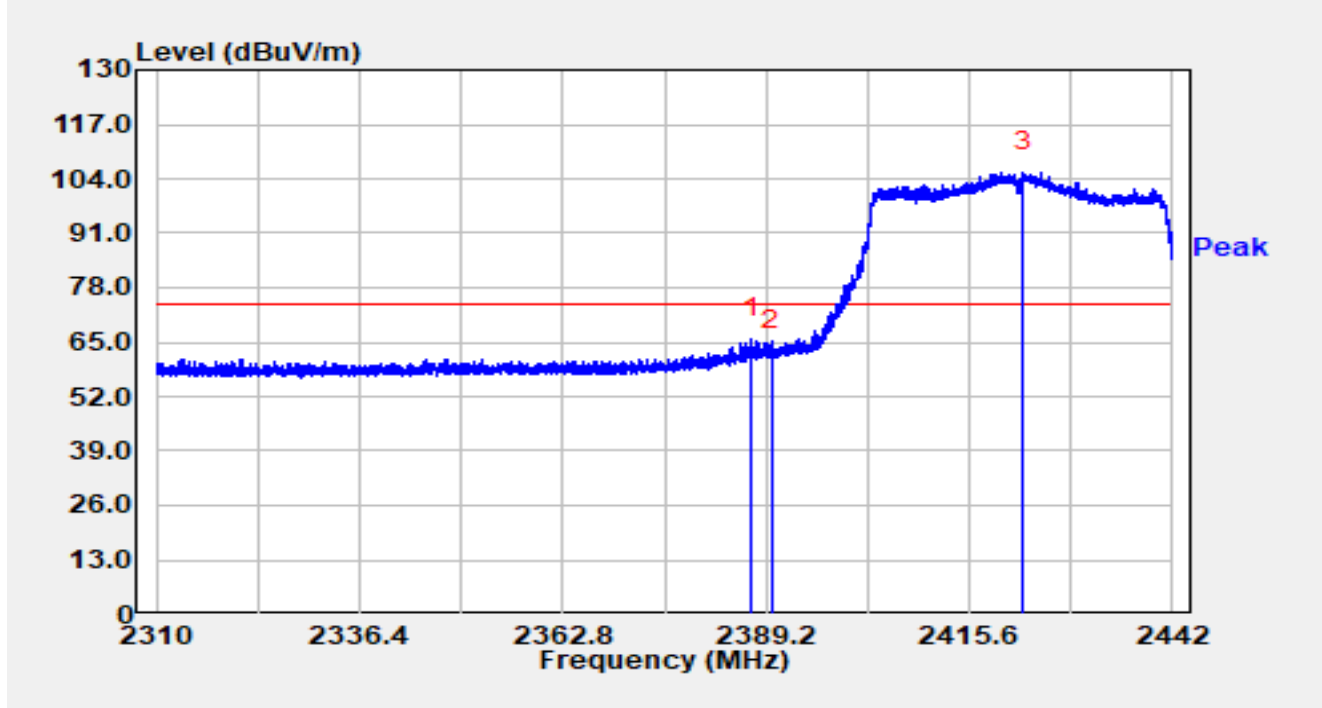


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.352	36.30	29.58	65.88	-8.12	74.00	Peak
2		2390.000	33.60	29.59	63.19	-10.81	74.00	Peak
3		2422.635	76.03	29.64	105.67	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2422MHz		

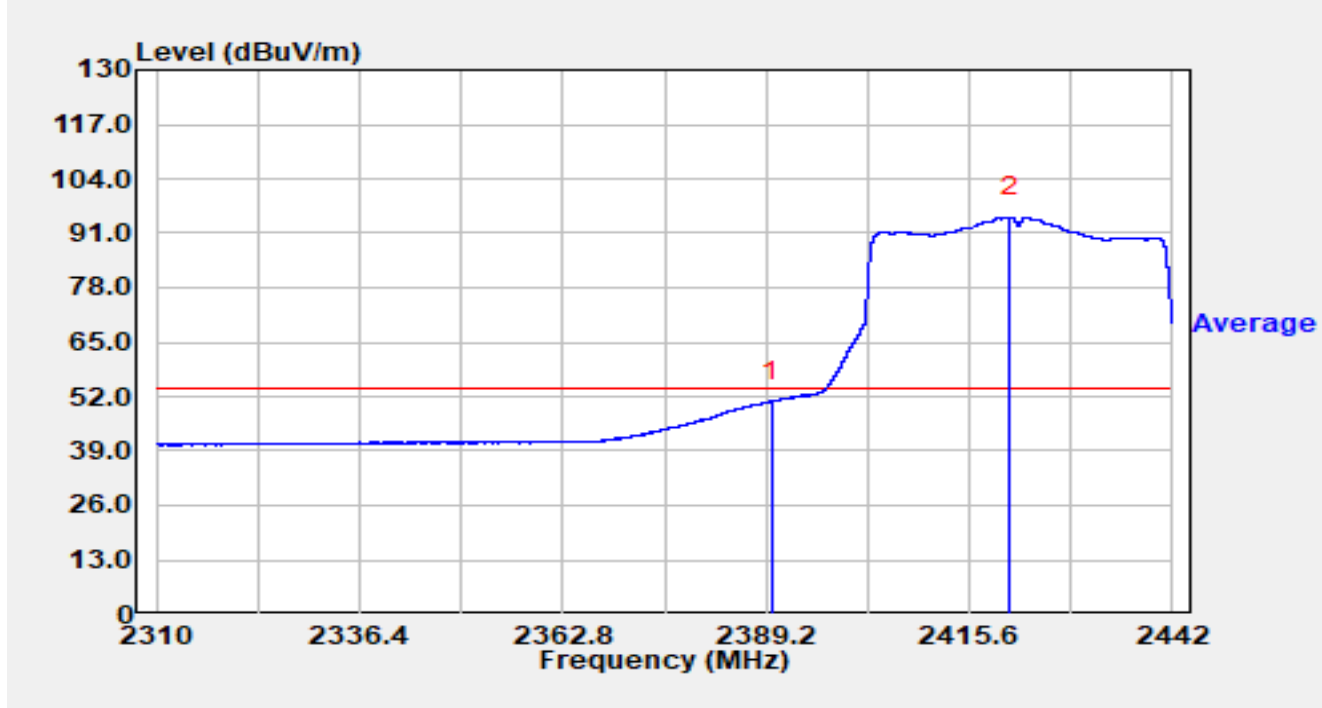


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	21.17	29.59	50.76	-3.24	54.00	Average
2		2420.854	65.14	29.63	94.77	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2422MHz		

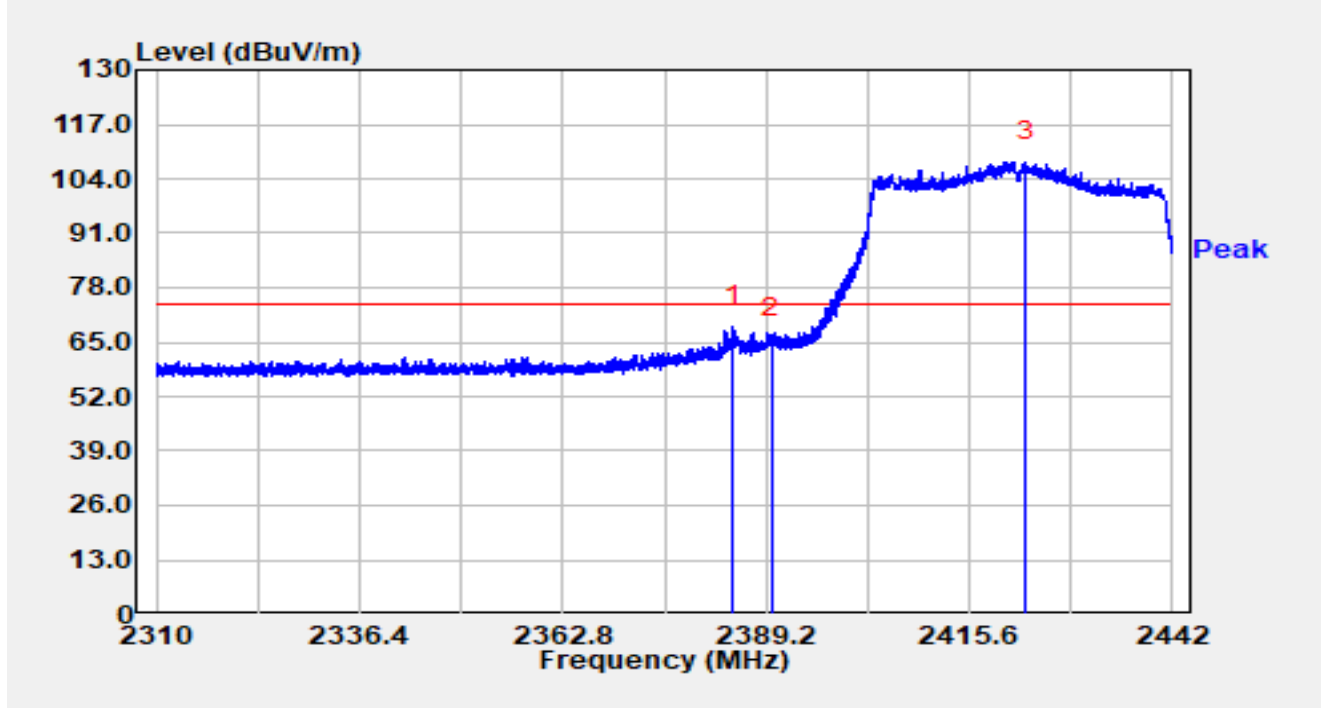


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2384.844	39.11	29.57	68.68	-5.32	74.00	Peak
2		2390.000	36.35	29.59	65.94	-8.06	74.00	Peak
3		2422.886	78.46	29.64	108.10	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2422MHz		

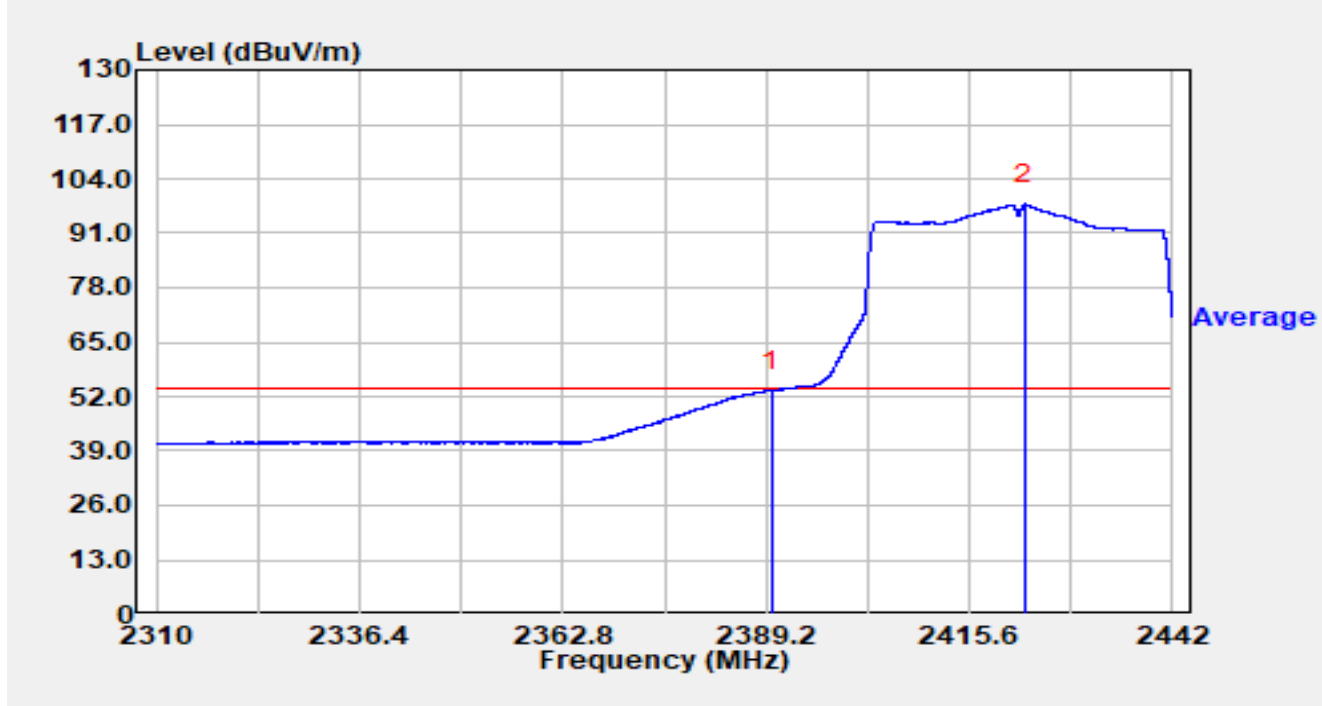


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	2390.000	23.84	29.59	53.44	-0.56	54.00	Average
2		2422.847	68.25	29.64	97.89	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2427MHz		

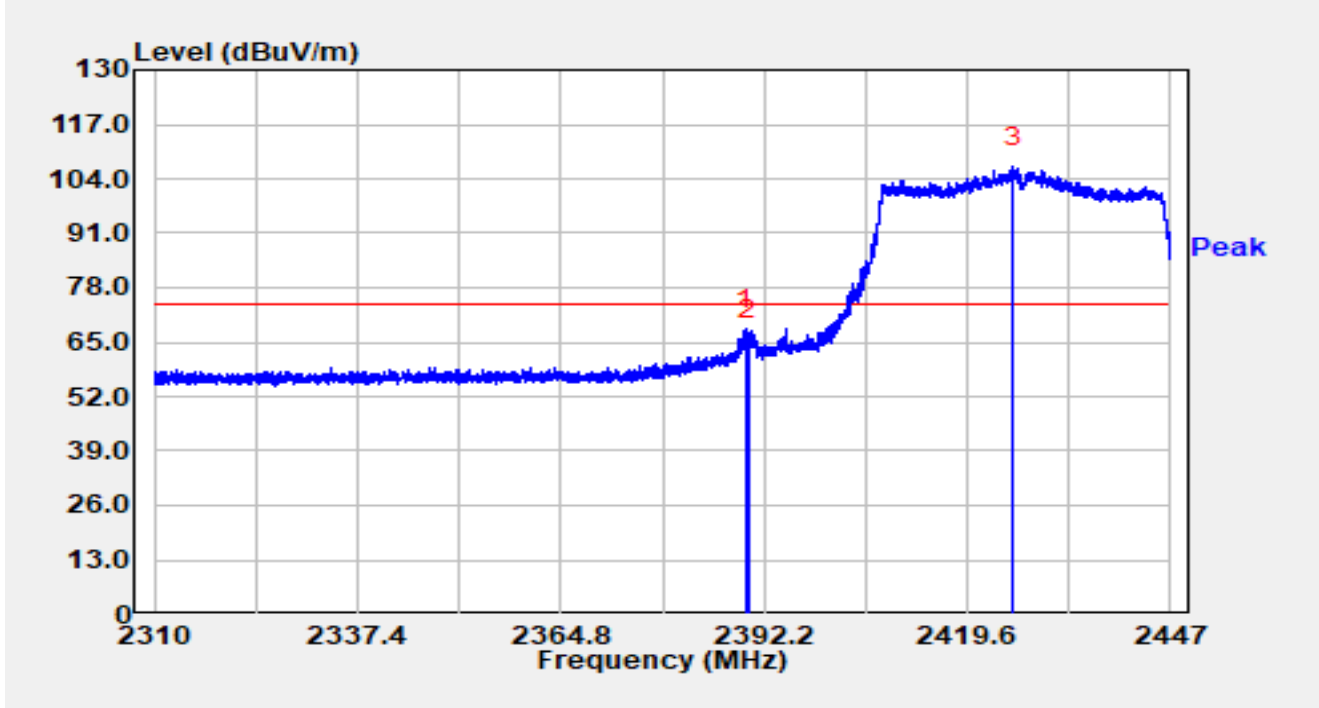


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.666	38.44	29.59	68.03	-5.97	74.00	Peak
2		2390.000	35.74	29.59	65.33	-8.67	74.00	Peak
3		2425.738	77.28	29.64	106.93	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2427MHz		

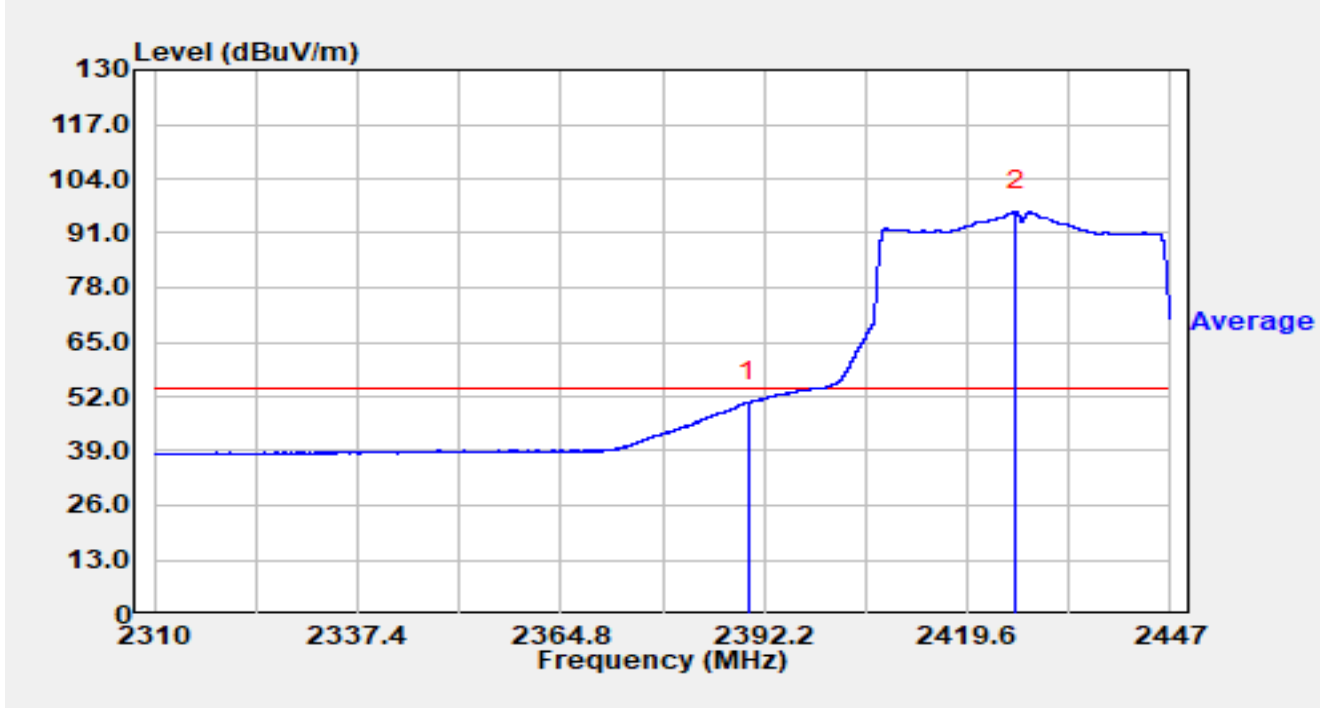


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	20.94	29.59	50.54	-3.46	54.00	Average
2		2426.176	66.53	29.65	96.17	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2427MHz		

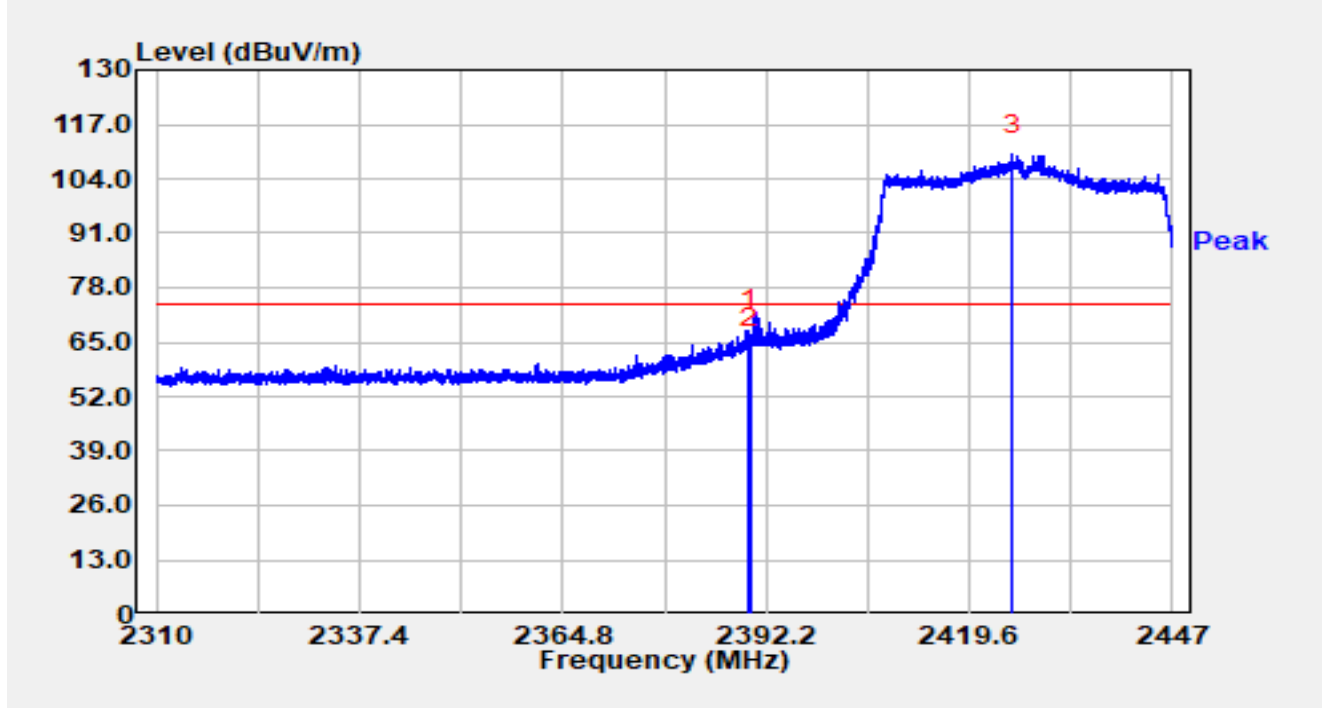


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.830	38.34	29.59	67.93	-6.07	74.00	Peak
2		2390.000	33.99	29.59	63.58	-10.42	74.00	Peak
3		2425.354	80.07	29.64	109.72	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2427MHz		

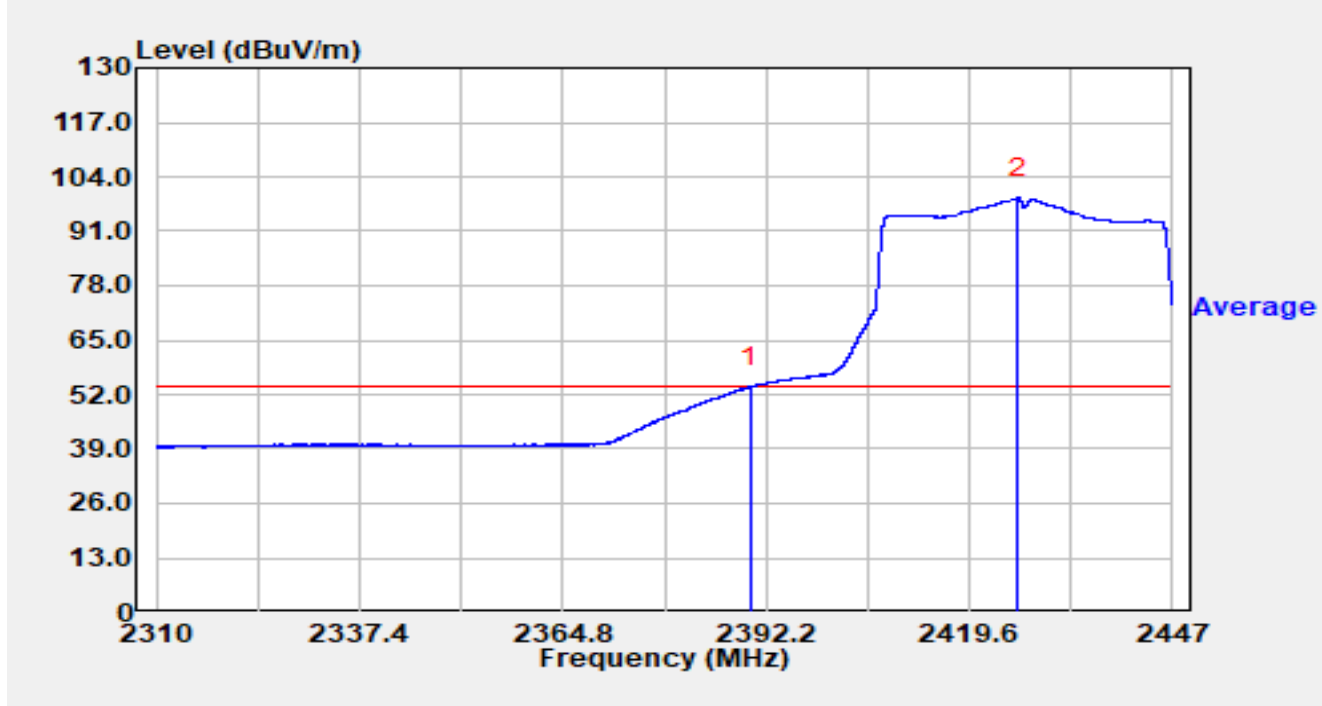


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	24.16	29.59	53.75	-0.25	54.00	Average
2		2426.149	69.34	29.65	98.99	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2437MHz		

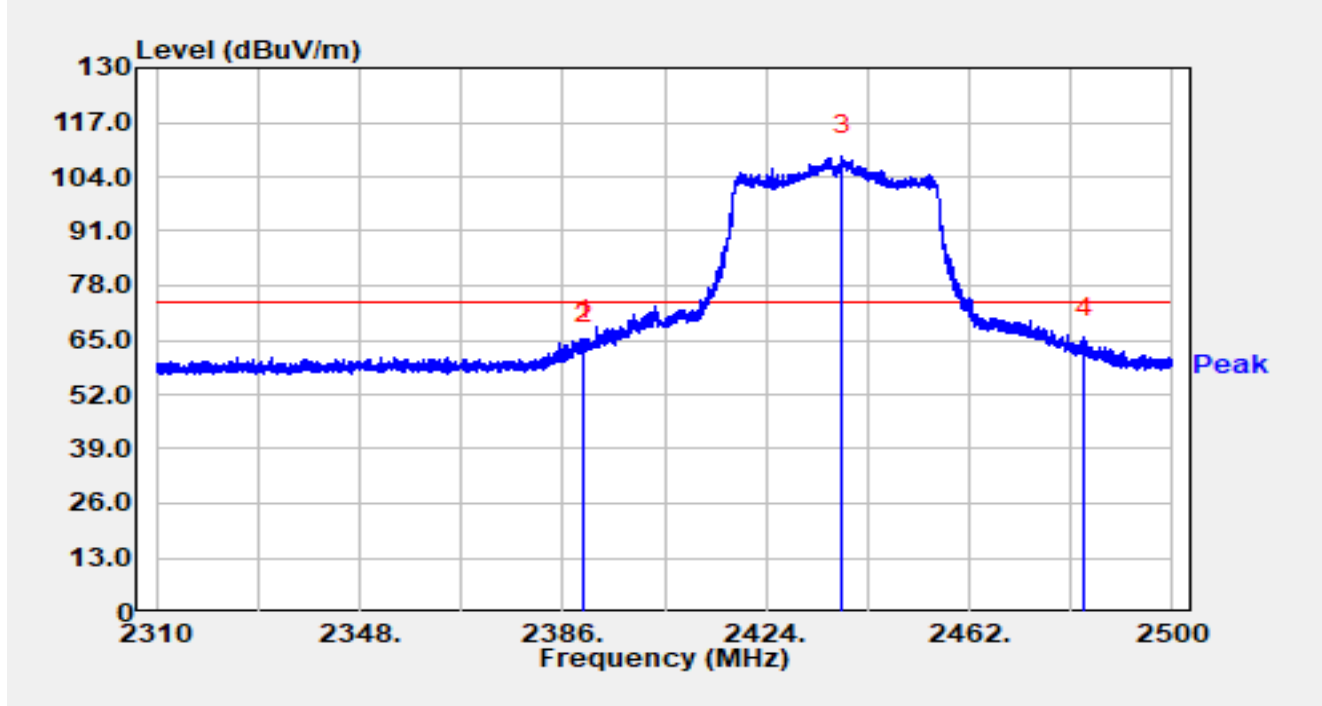


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2389.876	35.49	29.59	65.08	-8.92	74.00	Peak
2		2390.000	34.29	29.59	63.88	-10.12	74.00	Peak
3		2438.193	79.36	29.68	109.04	N/A	N/A	Peak
4	*	2483.500	35.66	29.76	65.43	-8.57	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2437MHz		

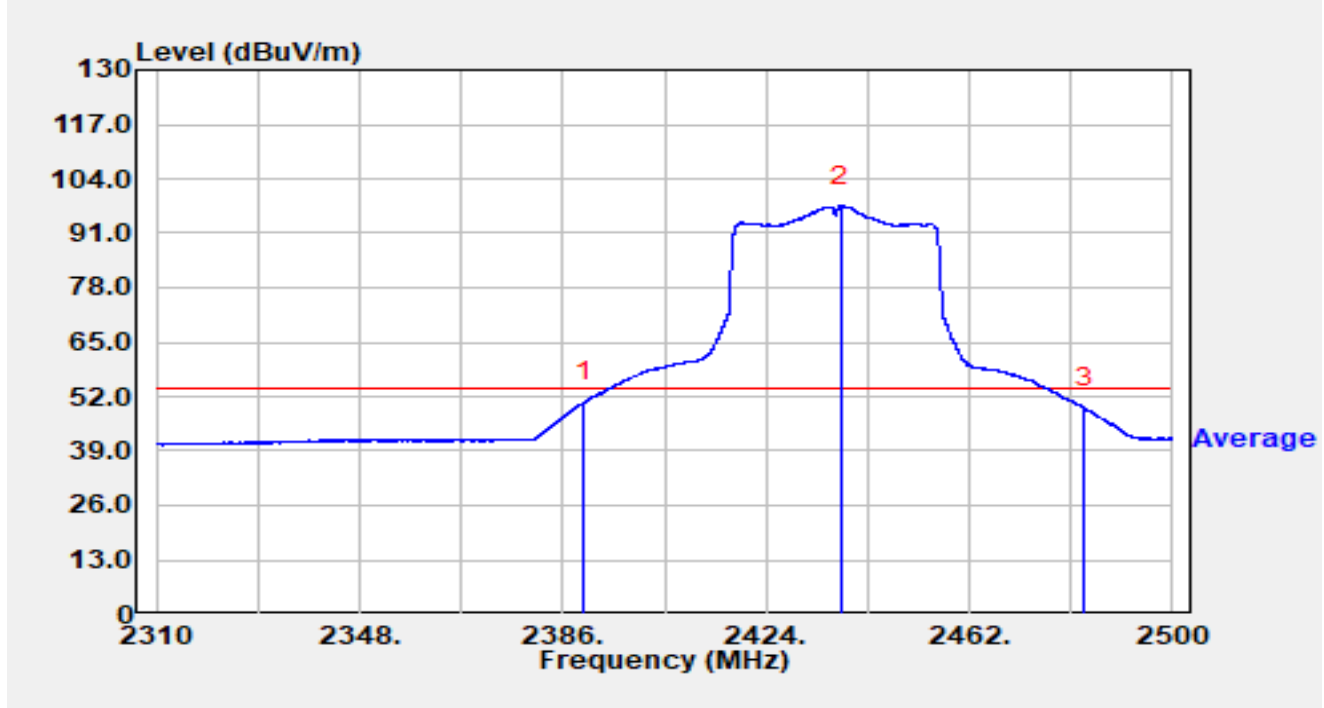


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	20.99	29.59	50.58	-3.42	54.00	Average
2		2438.003	67.84	29.68	97.52	N/A	N/A	Average
3		2483.500	19.58	29.76	49.34	-4.66	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2437MHz		

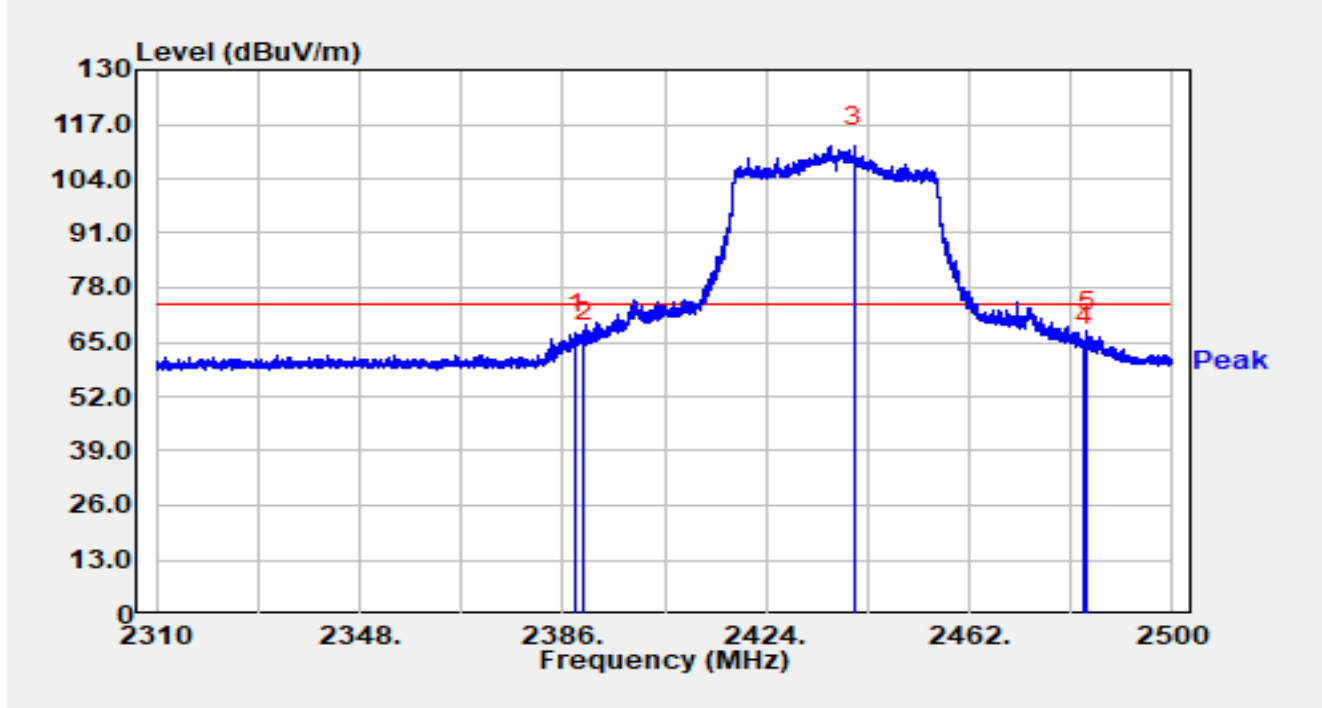


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2388.470	37.44	29.59	67.03	-6.97	74.00	Peak
2		2390.000	35.56	29.59	65.16	-8.84	74.00	Peak
3		2440.397	82.12	29.68	111.80	N/A	N/A	Peak
4		2483.500	34.21	29.76	63.98	-10.02	74.00	Peak
5	*	2484.021	37.70	29.77	67.46	-6.54	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2437MHz		

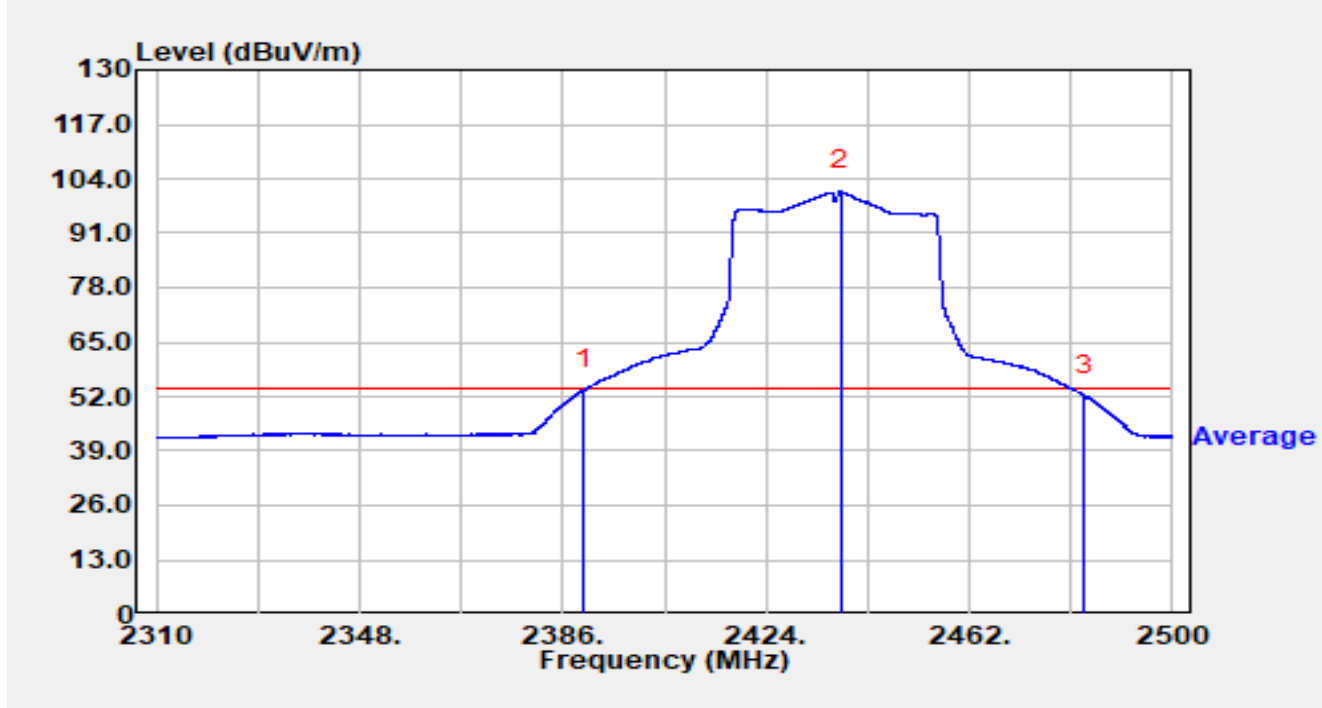


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	24.05	29.59	53.64	-0.36	54.00	Average
2		2437.889	71.38	29.68	101.06	N/A	N/A	Average
3		2483.500	22.49	29.76	52.26	-1.74	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2452MHz		

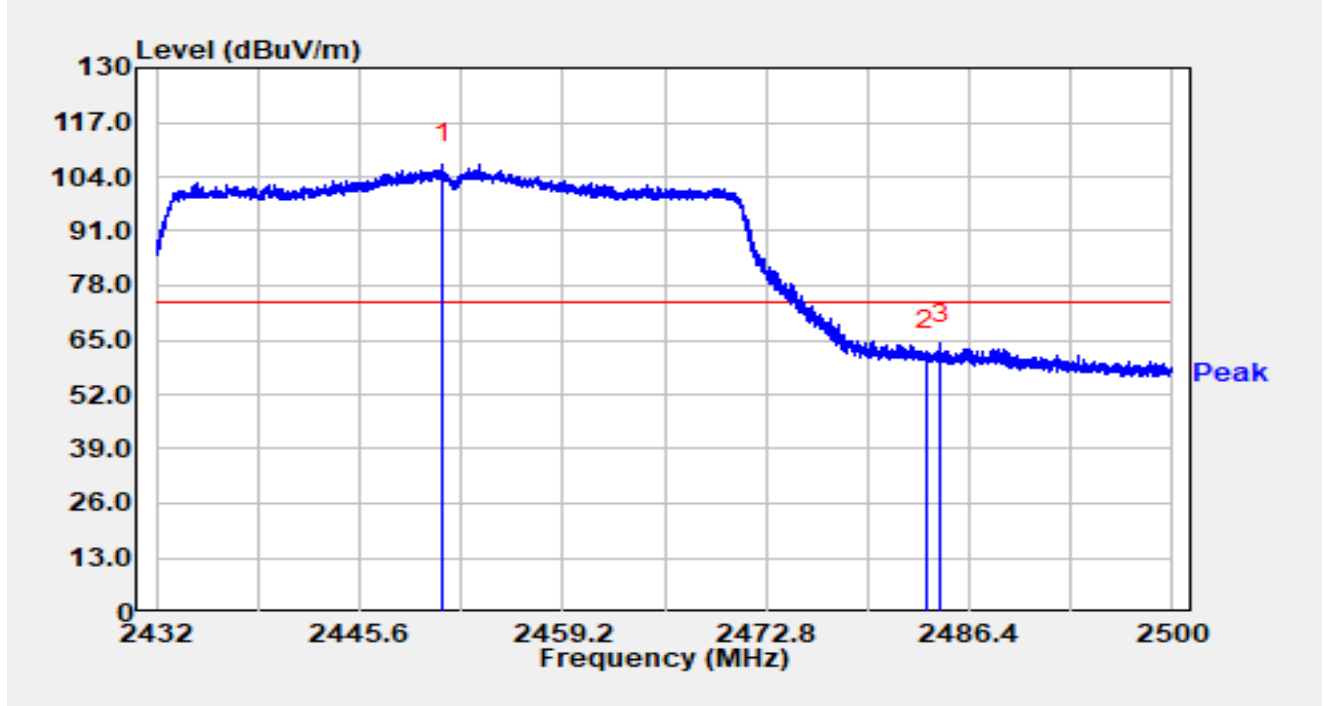


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2451.190	77.30	29.70	106.99	N/A	N/A	Peak
2		2483.500	32.65	29.76	62.41	-11.59	74.00	Peak
3	*	2484.489	34.35	29.77	64.12	-9.88	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2452MHz		

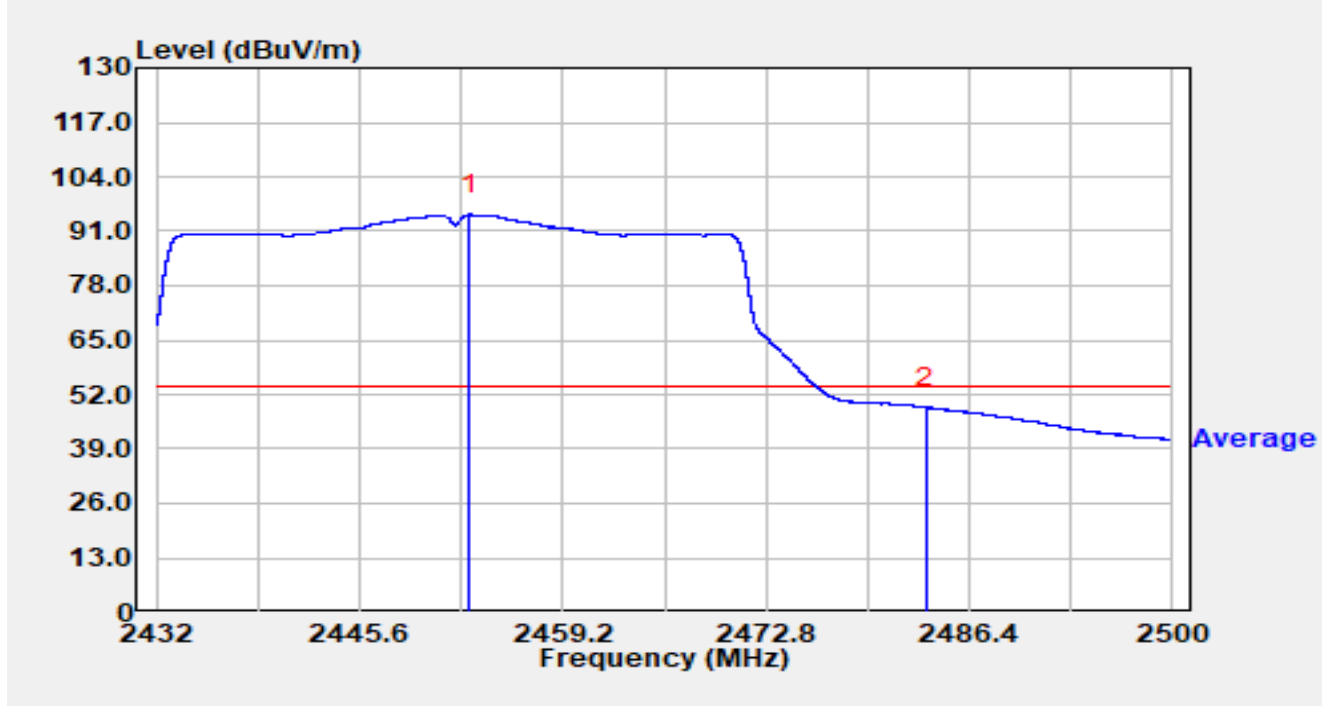


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2452.971	65.27	29.70	94.97	N/A	N/A	Average
2	*	2483.500	19.18	29.76	48.94	-5.06	54.00	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_PK	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2452MHz		

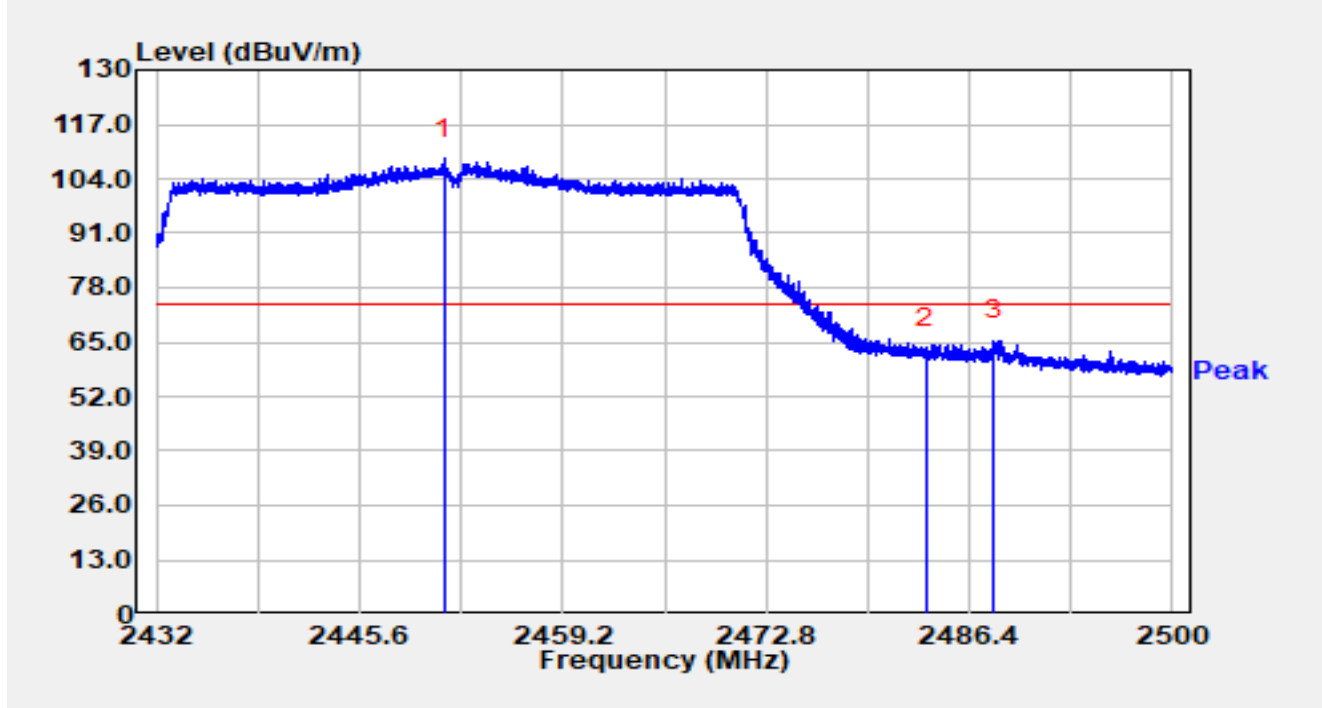


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2451.264	79.01	29.70	108.71	N/A	N/A	Peak
2		2483.500	33.55	29.76	63.32	-10.68	74.00	Peak
3	*	2488.080	35.69	29.78	65.47	-8.53	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-03-08
Temperature	17.9 °C	Humidity	34.3 %
Limit	FCC_Part 15_Band Edge (3m)_AV	Test Engineer	Carl Jiang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2452MHz		

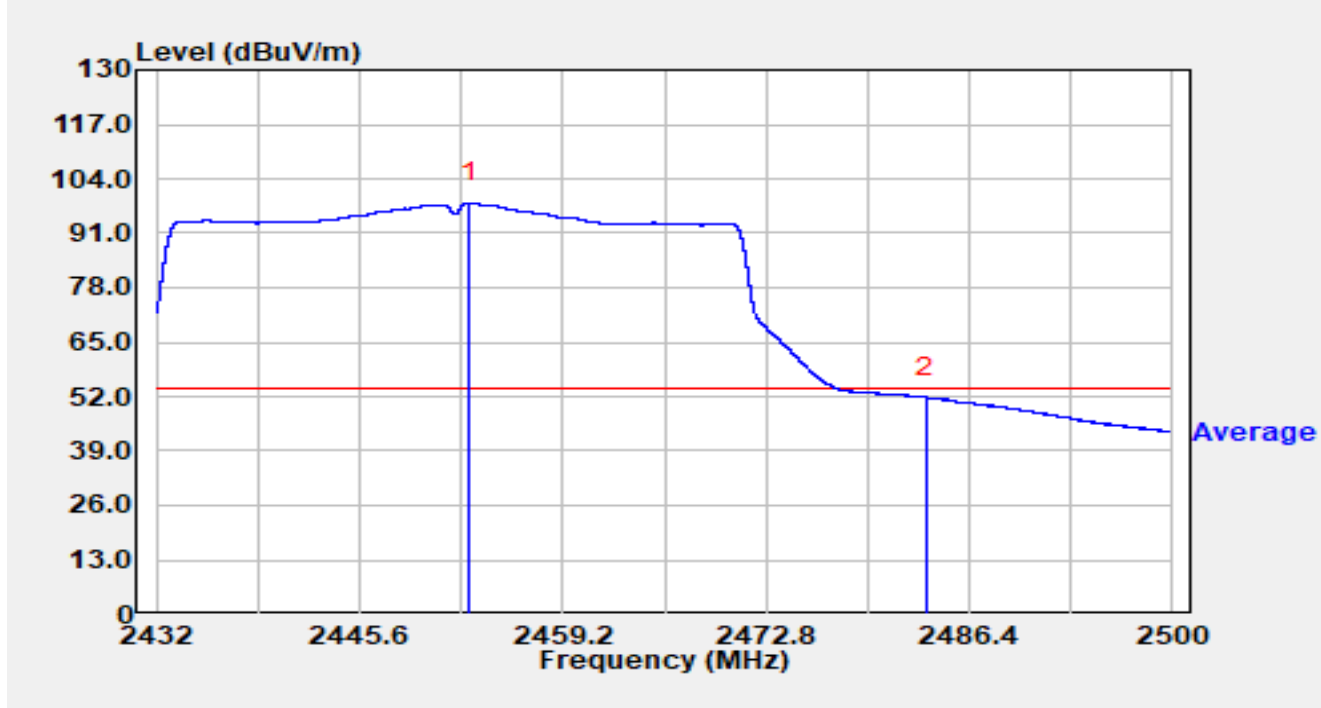


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2452.910	68.64	29.70	98.33	N/A	N/A	Average
2	*	2483.500	22.06	29.76	51.82	-2.18	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.8 AC Conducted Emissions Test Result

Site	WJ-SR5	Test Date	2025-03-19
Temperature	19.2 °C	Humidity	33.6 %
Limit	FCC Part 15.207_CE	Test Engineer	Carl Jiang
Factor	ENV216-07202_L1_Filter Off_E	Polarity	Line1
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2437MHz		

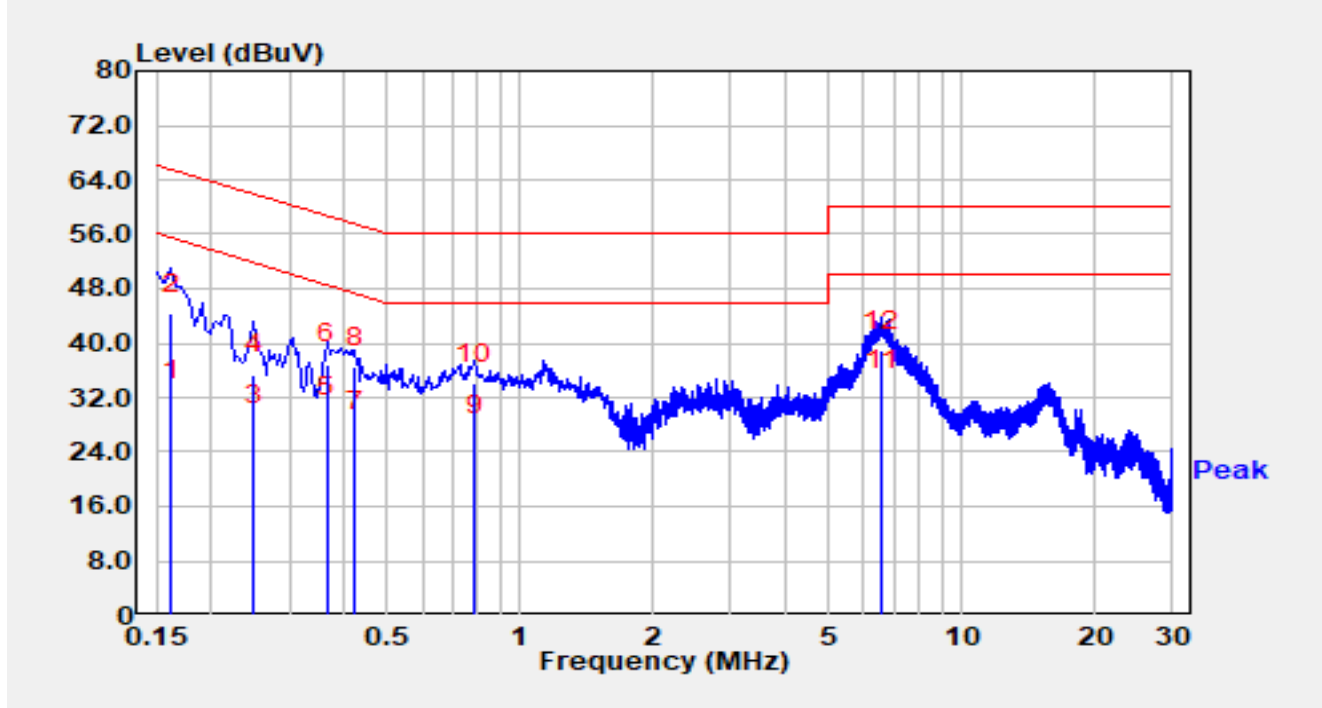


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.162	21.78	9.89	31.67	-23.70	55.36	Average
2		0.162	34.39	9.89	44.28	-21.09	65.36	QP
3		0.250	18.06	9.89	27.95	-23.81	51.76	Average
4		0.250	25.47	9.89	35.36	-26.40	61.76	QP
5		0.366	19.25	9.92	29.17	-19.42	48.59	Average
6		0.366	26.97	9.92	36.89	-21.70	58.59	QP
7		0.422	17.23	9.93	27.16	-20.24	47.41	Average
8		0.422	26.57	9.93	36.50	-20.90	57.41	QP
9		0.790	16.19	10.09	26.28	-19.72	46.00	Average
10		0.790	23.98	10.09	34.07	-21.93	56.00	QP
11	*	6.582	22.70	10.49	33.19	-16.81	50.00	Average
12		6.582	28.32	10.49	38.81	-21.19	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	WJ-SR5	Test Date	2025-03-19
Temperature	19.2 °C	Humidity	33.6 %
Limit	FCC Part 15.207_CE	Test Engineer	Carl Jiang
Factor	ENV216-07202_N_Filter Off_E	Polarity	Neutral
EUT	Wi-Fi 7 DeskPod AP	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2437MHz		

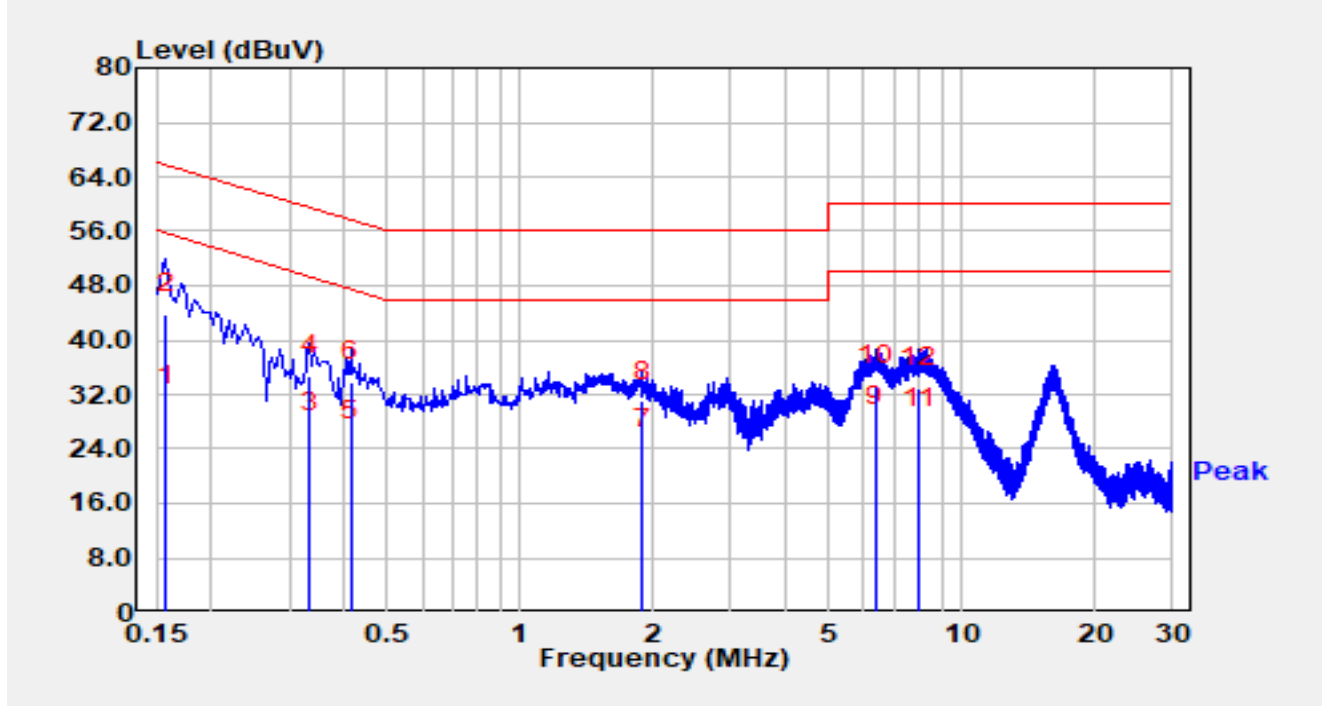

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.158	20.56	9.90	30.46	-25.11	55.57	Average
2	*	0.158	33.97	9.90	43.87	-21.70	65.57	QP
3		0.334	16.57	9.92	26.49	-22.86	49.35	Average
4		0.334	24.91	9.92	34.83	-24.52	59.35	QP
5		0.414	15.13	9.95	25.08	-22.49	47.57	Average
6		0.414	23.87	9.95	33.82	-23.75	57.57	QP
7		1.890	13.83	10.23	24.06	-21.94	46.00	Average
8		1.890	20.80	10.23	31.03	-24.97	56.00	QP
9		6.370	16.91	10.55	27.46	-22.54	50.00	Average
10		6.370	22.76	10.55	33.31	-26.69	60.00	QP
11		7.989	16.33	10.70	27.03	-22.97	50.00	Average
12		7.989	22.31	10.70	33.01	-26.99	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.

2. $C.F (dB) = LISN \text{ Factor } (dB) + \text{Cable Loss } (dB)$.
3. $\text{Measurement } (dB\mu V) = \text{Reading } (dB\mu V) + C.F (dB)$.

Appendix B – Test Setup Photograph

Refer to “R25S1037020-UT” file.

Appendix C – EUT Photograph

Refer to “R25S1037020-UE” file.

The End
