

Tri-band Wi-Fi7 Router

WF-825

Product Datasheet

VERSION1.0

Oct, 2023

www.actiontec.com

■ Overview

The tri-band Wi-Fi 7 WF-825 is designed to provide Wi-Fi network connectivity for homes and business based on the latest 802.11be chipset design. With the WF-825, the user can utilize EasyMesh R4, which provides a self-configuring, self-healing and self-managing Wi-Fi network. It dynamically selects the most reliable Wi-Fi path and enables fast and seamless handoffs for end-users.

WF-825 is one of the best performing WiFi 7 router in the market. It supports 802.11ax on all Wi-Fi radio bands. The 2.4G radio supports 4x4 802.11b/g/n/ax MIMO. The 5G radio supports 4x4 802.11a/n/ac/ax/be MIMO. The 6G radio supports 4x4 802.11a/n/ac/ax/be MIMO WF-825 can meet the requirements for high-speed real-time traffic and high-bandwidth entertainment, such as 4K video, video game streaming and VR.

With global deployments in mind, the WF-825 utilized standard AC/DC adapter, allowing easy adaptation everywhere in every country.




■ Key Features

- Desktop placement
- 2.4GHz 40MHz 4x4 802.11b/g/n/ax
- 5GHz 160MHz 4x4 802.11a/n/ac/ax/be
- 6GHz 160MHz 4x4 802.11a/n/ac/ax/be
- WPA/WPA2-PSK(AES)/WPA3
- 8 x Integrated Wi-Fi antennas
- 1 x 10GbE WAN
- 1 x 10GbE LAN
- 3 x 2.5GbE LAN
- 4 x Status LED (multi-color)
- 1 x USB3.0
- 1 x WPS button
- 1 x Reset button
- 1 x DC jack
- Supports router/extender functions
- Supports TR-069 management
- Supports EasyMesh R4

■ Application Scenario

- Three WF-825 and WF-710G can form a Wi-Fi mesh network. One configured as the Gateway and the other two configured as the Wi-Fi Extender:

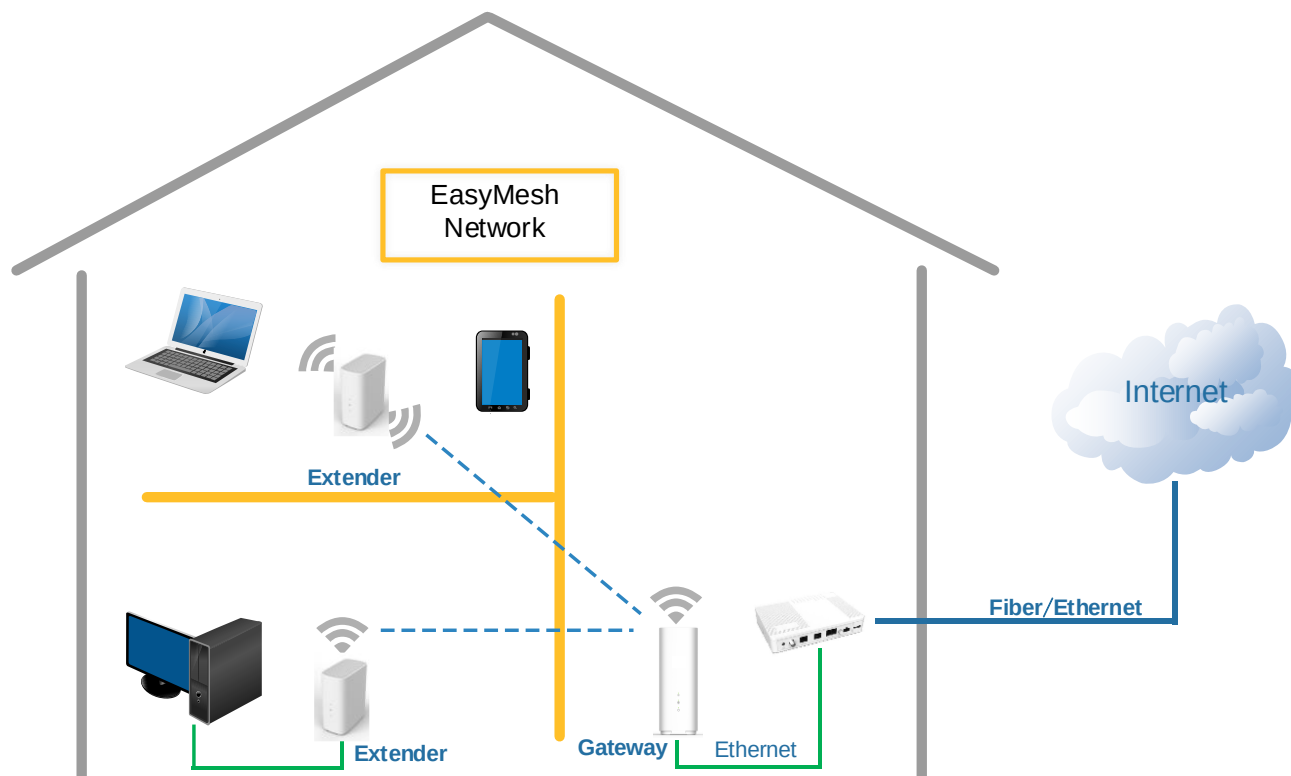

■ Software Features

Category	Features
Network	Bridge Mode - DHCP Client - Backhaul with 2.4G/5G Wi-Fi/Ethernet
	Router Mode - IPv4 - IPv6 - NAT - WAN DHCP client - LAN DHCP server - DNS server

	- DHCP reservation - uPNP - Port forwarding - Backhaul with Ethernet
	IGMP Snooping
Wi-Fi	2.4GHz bandwidth: 20/40MHz, 5GHz bandwidth: 20/40/80/160MHz
	802.11 k/v/r
	Band steering
	Channel scan
	DFS
	SSID broadcast
	WPA/WPA2/WPA3 PSK security
TR-069 Management	Network topology display - Device connected - Client accessed - Channel - Backhaul type
	Network optimize
	WPA/WPA2/WPA3 PSK security
	Freeze client
	Device information - Status - Online time - IP address - MAC address - Firmware version - Channel
	Client information - Status - Online time - IP address - MAC address - Channel
	Network statistic chart - Bandwidth usage - RSSI - Channel congestion - Event

Utilities

- Reboot device
- Upgrade remotely
- Speed Test

■ Specification

Item	WF-825
Dimension (D x H)	202mm x 85mm x 235mm (High)
Installation	Desktop placement
LEDs	4x Status LED (multi-color)
Interface	1 x 10GbE WAN 1 x 10GbE WAN 3 x 2.5GbE LAN 1 x DC jack
Input Voltage	+12V/5A
Power consumption	< 50W
Environmental Specification	
Temperature	Operation: 0°C ~ +35°C Storage: -40°C ~ +85°C
Operating Humidity	5% ~ 95% (non-condensing)
Elevations	86kPa ~ 106kPa altitude
Dustproof and Waterproof	IP20
Compliance	• IEC 62368-1:2014 (Second Edition)+A11: 2017 • UL 62368-1, 2nd Ed, 2014-12-01 (Audio/video, information and communication technology equipment Part 1: Safety requirements) • CAN/CSA C22.2 No. 62368-1-14, 2nd Ed (Audio/video, information and communication technology equipment Part 1: Safety requirements)

Item	WF-825		
	- FCC - ETL - RoHS 2011/65/EU compliant (RoHS 10 compliant, no Pb)		
Reliability			
MTBF	> 300,000 Hours Telcordia SR-332, Reliability Prediction Procedures for Electronic Equipment, Issue 3, Method 1, Case 3, GB/GC (Ground Benign, Controlled) environment, 25°C ambient temperature. Steady state, not including software failure.		
AFR	AFR (Annualized Failure Rate) < 1.5% (in continuous operation)		
Chipset			
Wi-Fi SoC	Qualcomm		
Flash	4GB eMMC		
DDR	1GB DDR4 RAM		
Wi-Fi Interface			
Operating frequency	2.4G radio: 2.4000GHz~2.4835GHz		
	5G radio: 5.150~5.250,5.250~5.350,5.470~5.725, 5.725~5.850GHz		
	6G radio: 5.925 ~ 7.125GHz		
Data Rate	802.11b: 1, 2, 5.5, and 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, and 54Mbps 802.11a: 6, 9, 12, 18, 24, 36, 48 and 54Mb/s 802.11n: MCS0~MCS15 802.11ac: MCS0 ~ MCS9 802.11ax: MCS0~MCS11		
Receive Sensitivity	2.4G		
	802.11g: -90dBm@6Mbps -74dBm@54Mbps		
	802.11n:		
		HT20	HT40
	MCS0	-90dBm	-87dBm

Item	WF-825		
	MCS7	-71dBm	-68dBm
5G			
802.11a: -92dBm@6Mbps			
-74dBm@54Mbps			
802.11ac:			
	VHT20	VHT40	VHT80
MCS0	-92dBm	-89dBm	-86dBm
MCS8	-68dBm	/	/
MCS9	/	-65dBm	-62dBm
802.11ax:			
	VHT20	VHT80	VHT160
MCS0	-91dBm	-85dBm	-83dBm
MCS11	-63dBm	-58dBm	-55dBm
802.11be:			
	VHT20	VHT80	VHT160
MCS0	-91dBm	-85dBm	-83dBm
MCS13	-57dBm	-51dBm	-48dBm

Item	WF-825																											
	6G 802.11a: -91dBm@6Mbps -74dBm@54Mbps 802.11ax: <table><tr><td></td><td>VHT20</td><td>VHT80</td><td>VHT160</td></tr><tr><td>MCS0</td><td>-91dBm</td><td>-85dBm</td><td>-82dBm</td></tr><tr><td>MCS11</td><td>-62dBm</td><td>-57dBm</td><td>-57dBm</td></tr></table> 802.11be: <table><tr><td></td><td>VHT20</td><td>VHT80</td><td>VHT160</td><td>VHT320</td></tr><tr><td>MCS0</td><td>-91dBm</td><td>-85dBm</td><td>-82dBm</td><td>-79dBm</td></tr><tr><td>MCS13</td><td>-57dBm</td><td>-51dBm</td><td>-48dBm</td><td>-45dBm</td></tr></table>		VHT20	VHT80	VHT160	MCS0	-91dBm	-85dBm	-82dBm	MCS11	-62dBm	-57dBm	-57dBm		VHT20	VHT80	VHT160	VHT320	MCS0	-91dBm	-85dBm	-82dBm	-79dBm	MCS13	-57dBm	-51dBm	-48dBm	-45dBm
	VHT20	VHT80	VHT160																									
MCS0	-91dBm	-85dBm	-82dBm																									
MCS11	-62dBm	-57dBm	-57dBm																									
	VHT20	VHT80	VHT160	VHT320																								
MCS0	-91dBm	-85dBm	-82dBm	-79dBm																								
MCS13	-57dBm	-51dBm	-48dBm	-45dBm																								

■ **Federal Communications Commission (FCC) Interference Statement**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generate, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

RF exposure warning

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 45 cm from all persons and must not be collocated or operating in conjunction with any other antenna or transmitter.

FCC regulations restrict operation of this device to indoor use only. The operation of this device is prohibited on oil platforms, cars, trans, boats, and aircraft, except that operation of this device is permitted in large aircraft while flying above 10000 feet. Operation of transmitters in the 5.925-7.125 GHz band is prohibited for control of or communications with unmanned aircraft systems.

■ Contact Information

■ Actiontec Electronics, Inc.

- 2445 Augustine Dr., Suite 501
- Santa Clara, CA 95054
- Tel: +1(408) 837-4800
- Email: broadband-sales@actiontec.com