




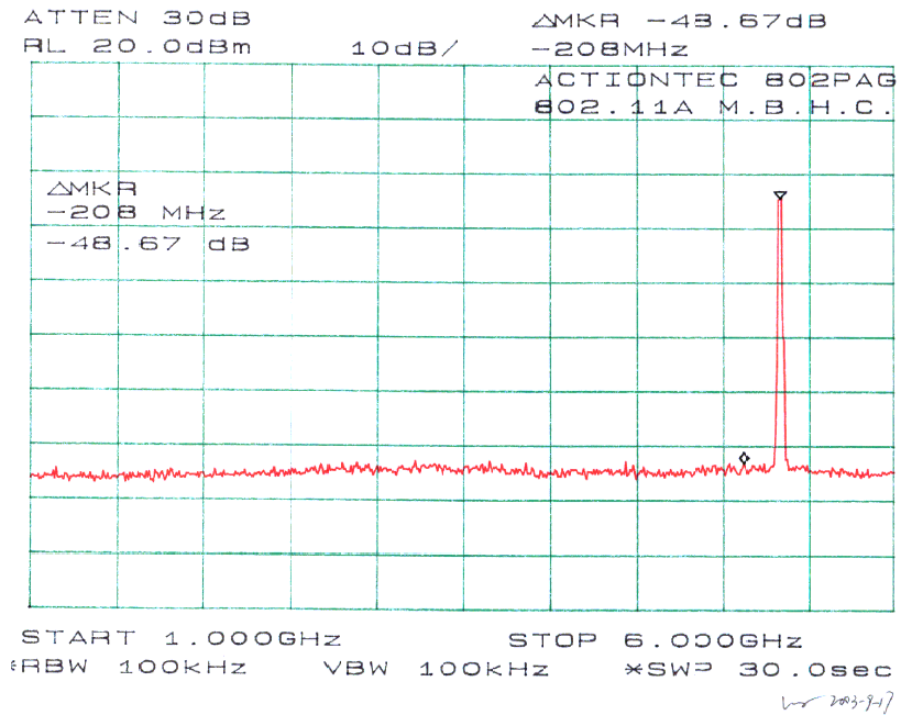
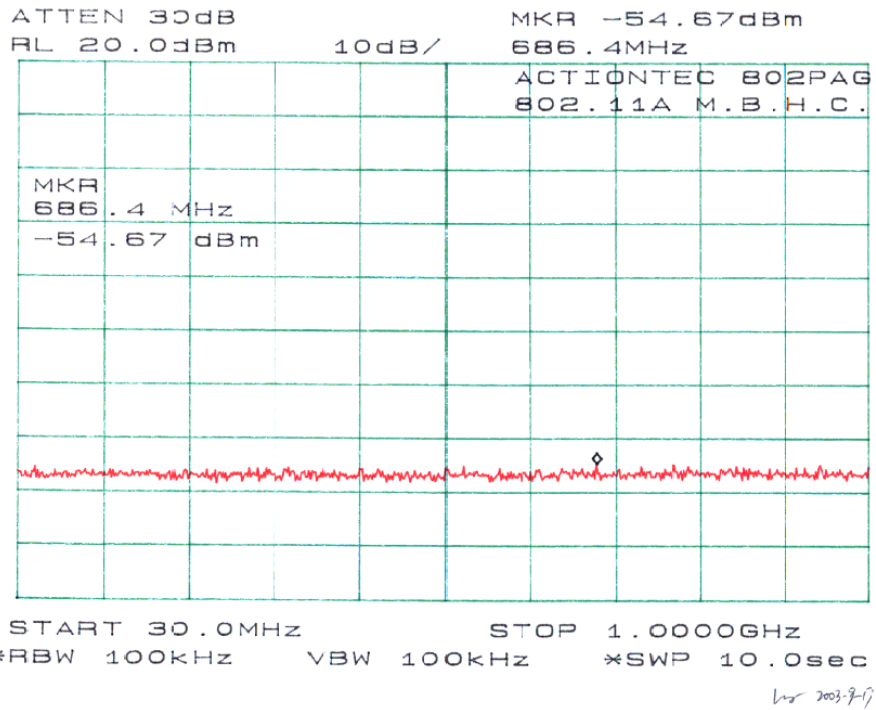
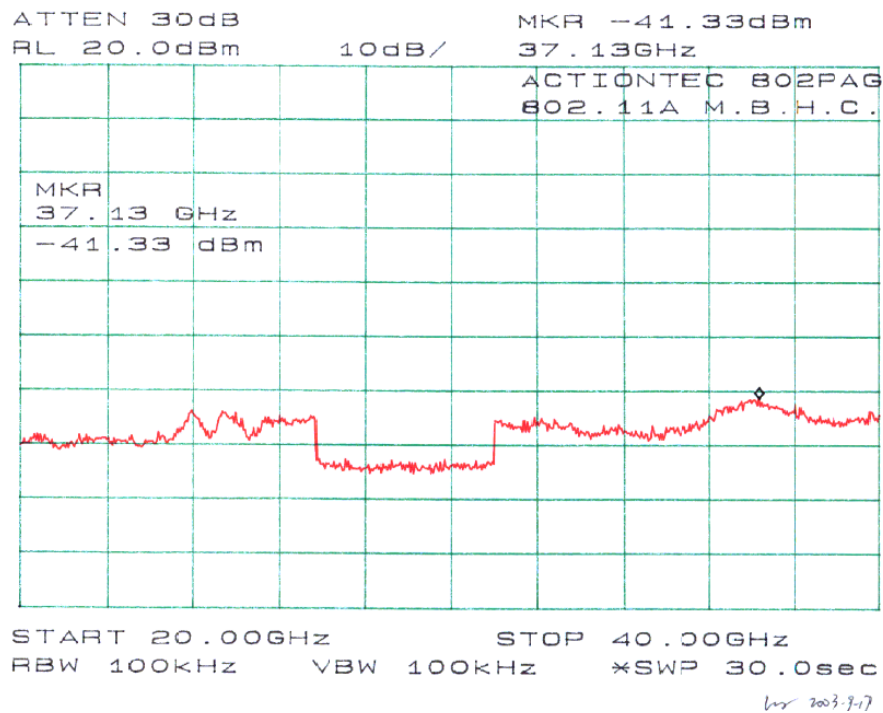
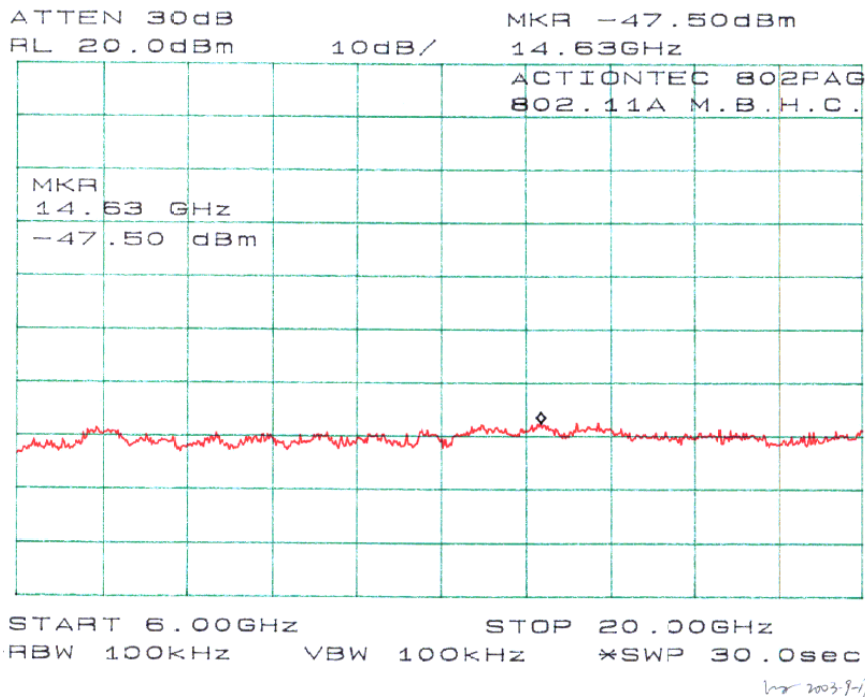
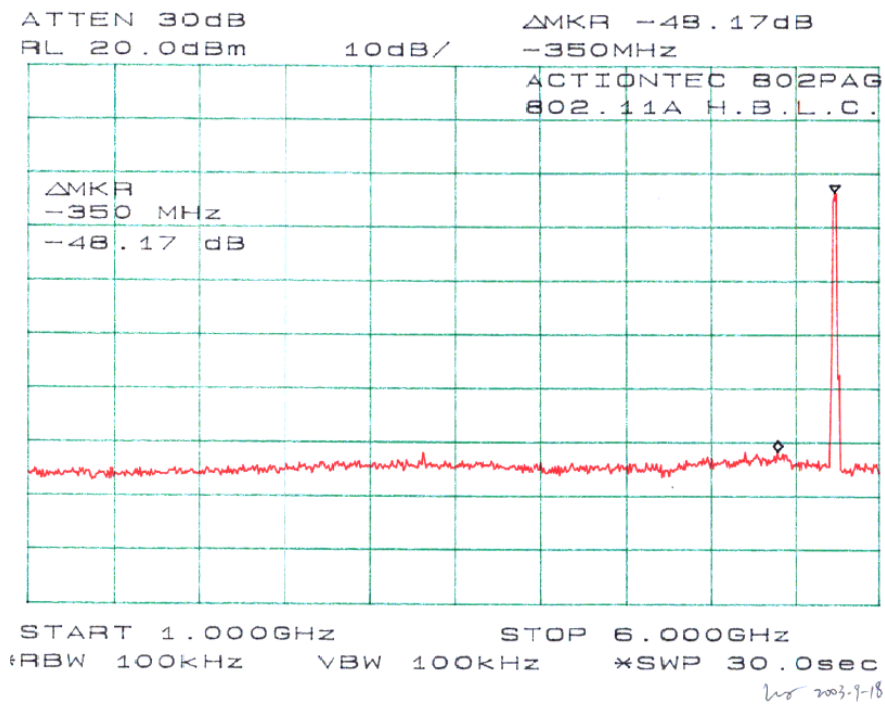



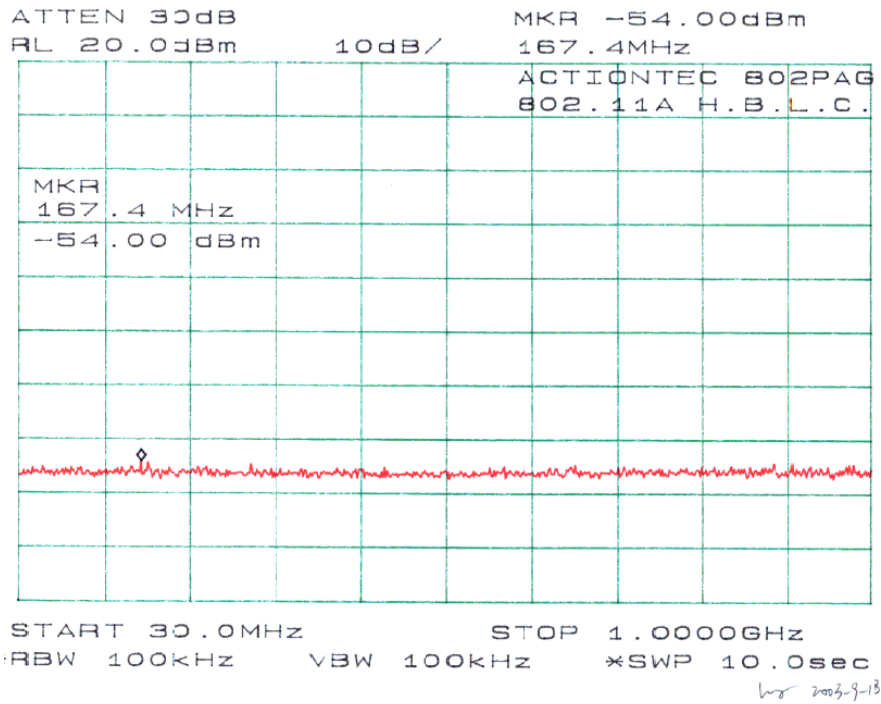



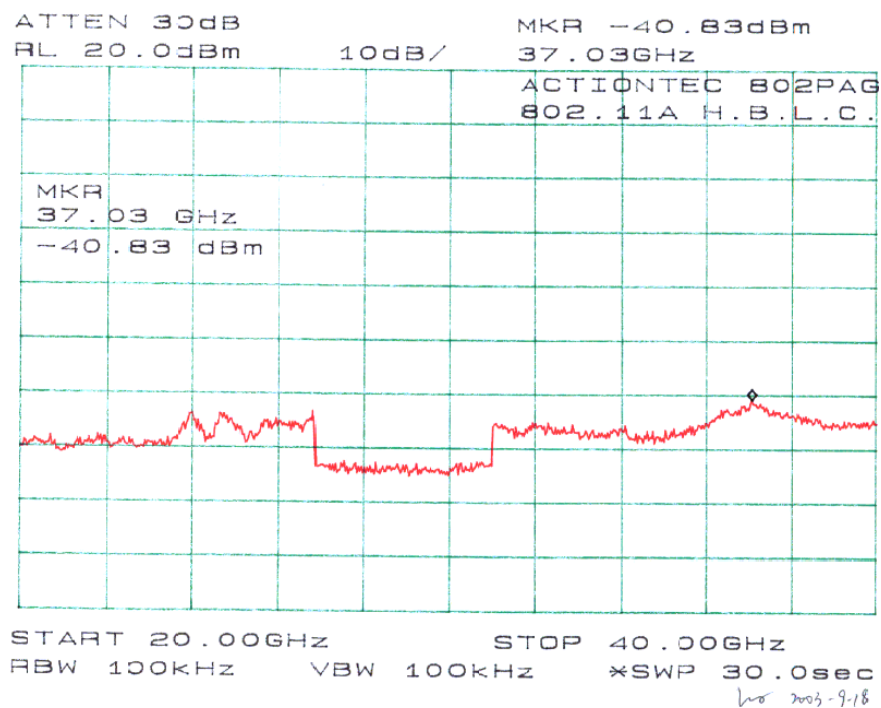



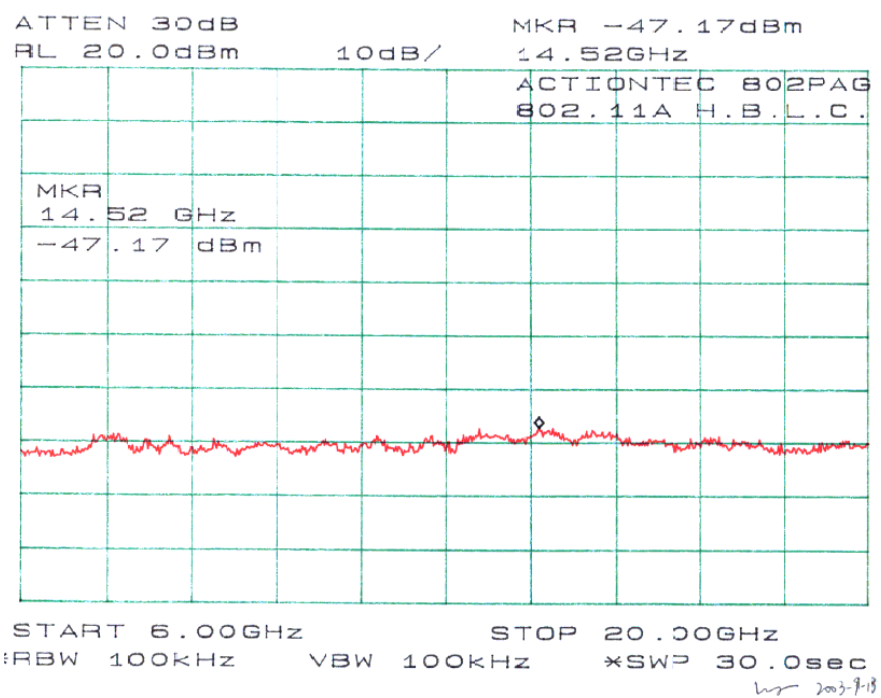


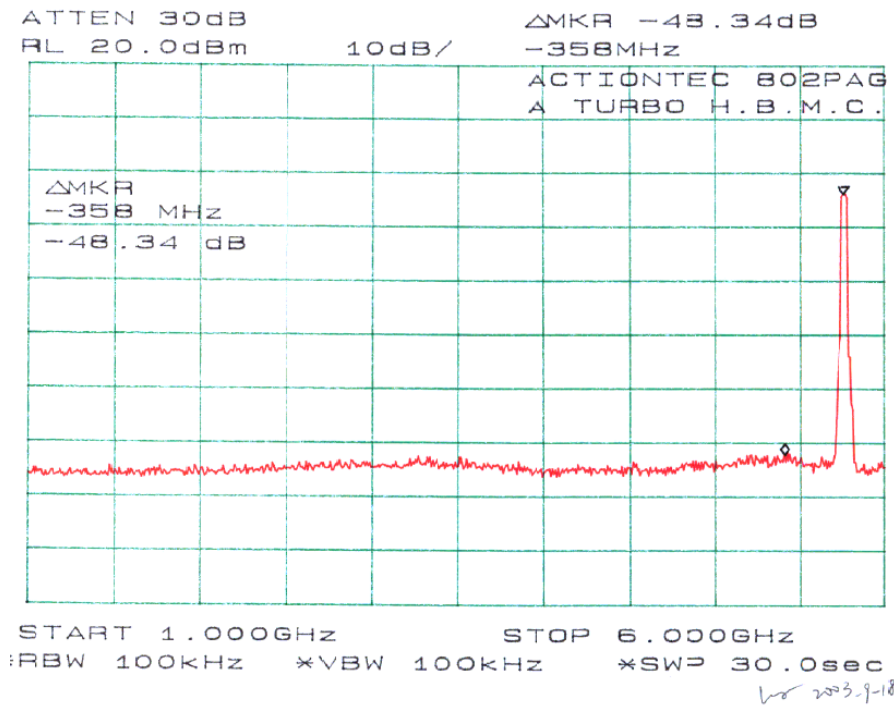

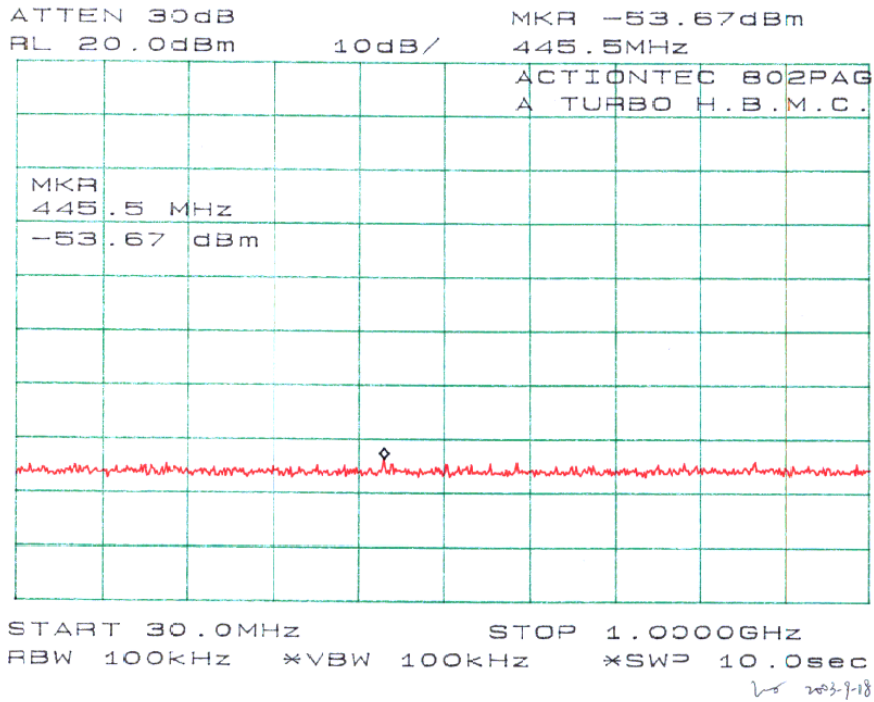

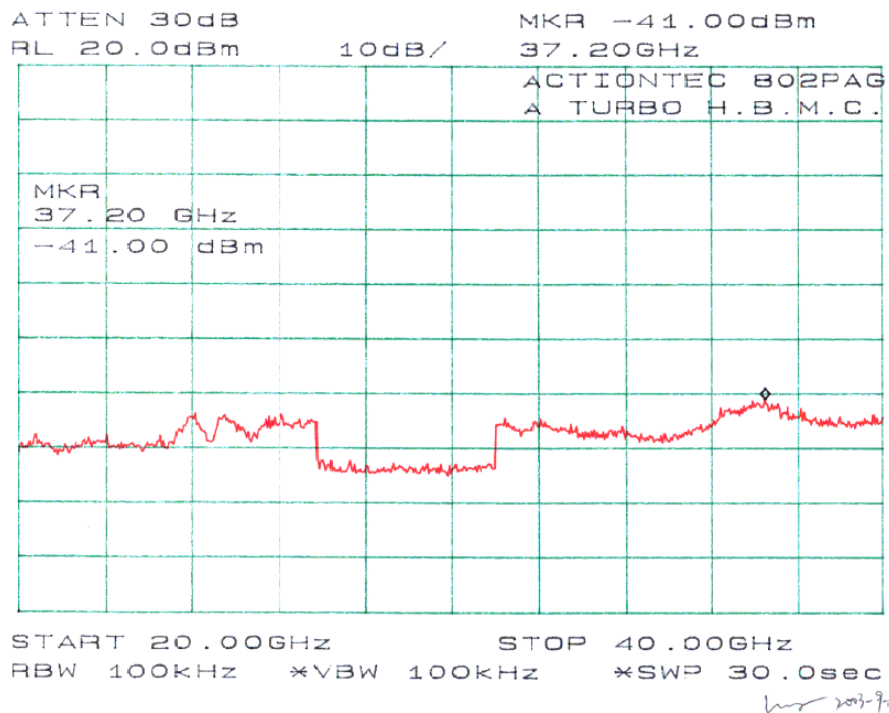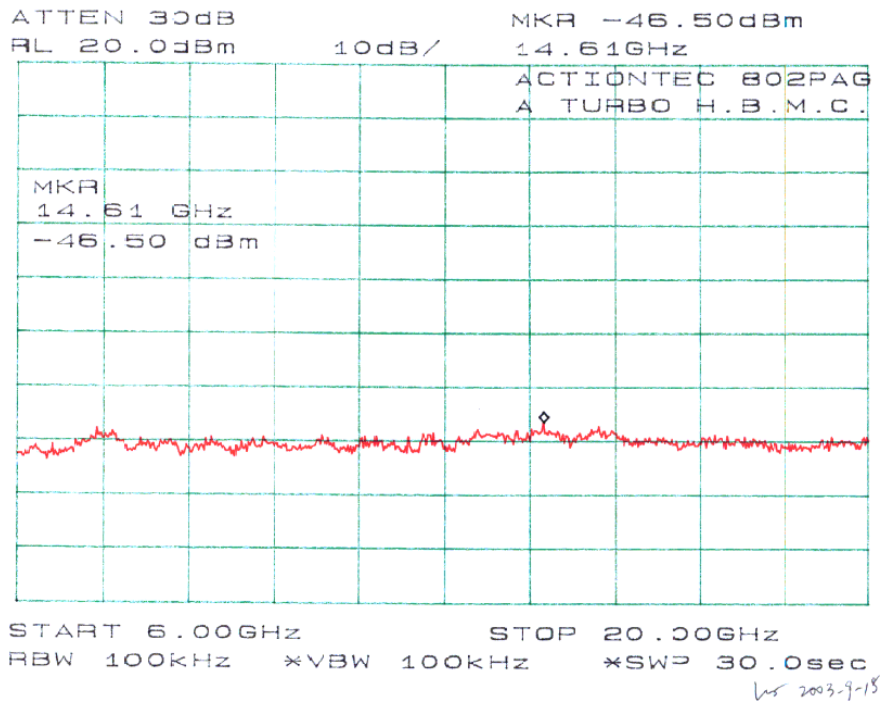

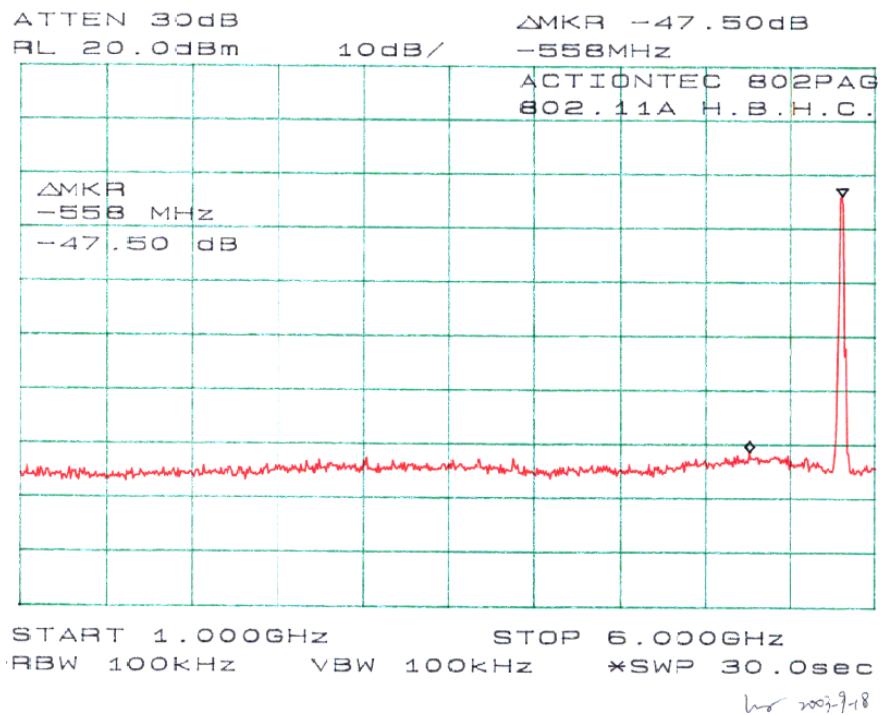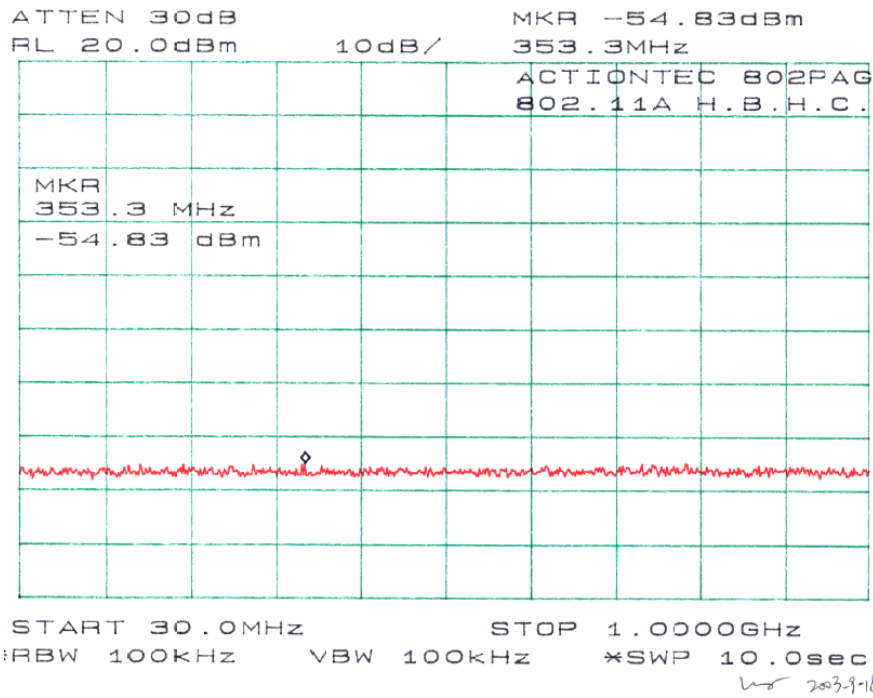

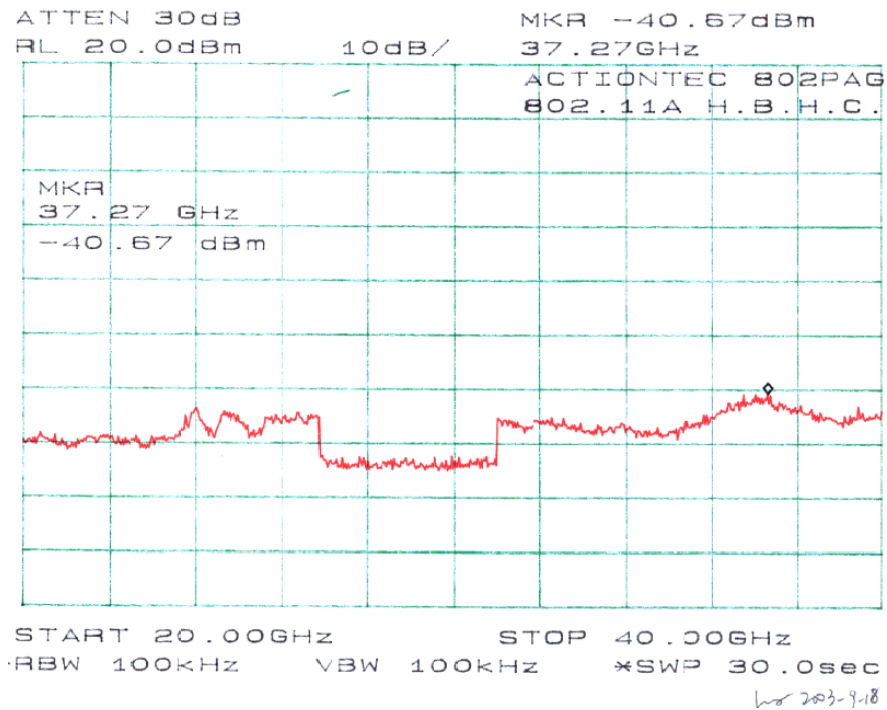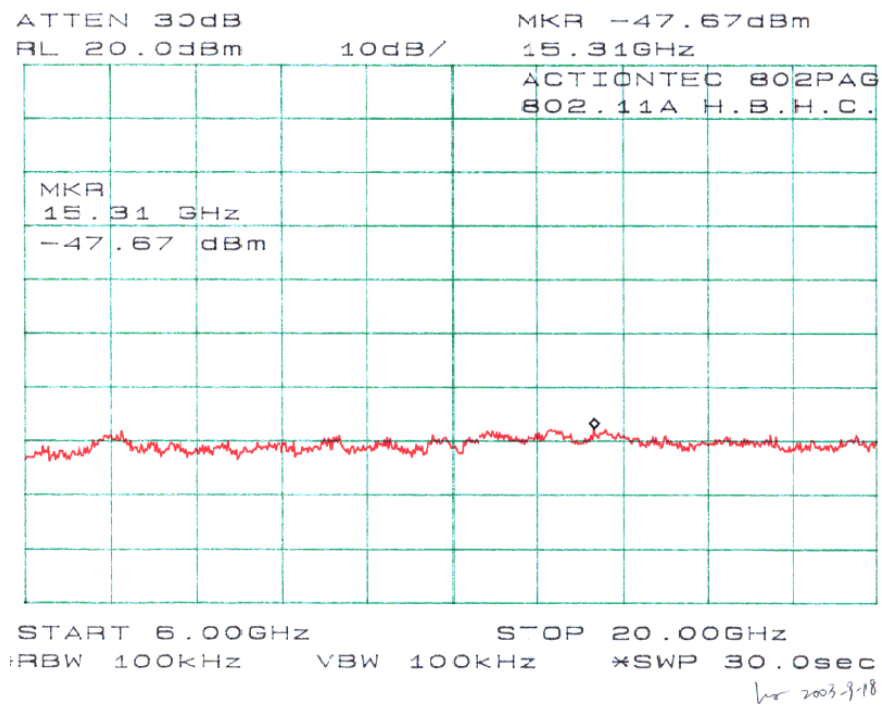

11 - ANTENNA REQUIREMENT

11.1 Standard Applicable

For intentional device, according to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to § 15.247 (1), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to § 15.407 (d), any U-NII device shall use a transmitting antenna that is an integral part of the device.

Refer to statement below for compliance.

“The antenna for the device is an integral antenna that the end user cannot access. Further the device is for outdoor use as detailed in the Users Manual and Operational Description, which are included in this application.”

11.2 Antenna Connected Construction

The antenna connector is designed with permanent attachment and no consideration of replacement.