

FCC PART 15.247

TEST REPORT

For

Actiontec Electronics, Inc.

760 North Mary Avenue Sunnyvale, CA 94085, USA

FCC ID: LNQMWTV2TX

Report Type: Original Report	Product Type: MyWirelessTV 2 Wireless HD Transmitter
Test Engineer:	Dean Liu 
Report Number:	R2SH140320052-00A
Report Date:	2014-05-19
Reviewed By:	Sula Huang  RF Engineer
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
ANTENNA INFORMATION.....	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	7
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	9
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	10
APPLICABLE STANDARD	10
FCC §15.203 - ANTENNA REQUIREMENT.....	11
APPLICABLE STANDARD	11
ANTENNA CONNECTOR CONSTRUCTION	11
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	12
APPLICABLE STANDARD	12
MEASUREMENT UNCERTAINTY.....	12
EUT SETUP	12
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
CORRECTED AMPLITUDE & MARGIN CALCULATION	13
TEST EQUIPMENT LIST AND DETAILS.....	14
TEST RESULTS SUMMARY	14
TEST DATA	14
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	17
APPLICABLE STANDARD	17
MEASUREMENT UNCERTAINTY.....	17
EUT SETUP	17
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	18
TEST PROCEDURE	18
CORRECTED AMPLITUDE & MARGIN CALCULATION	19
TEST EQUIPMENT LIST AND DETAILS.....	19
TEST RESULTS SUMMARY	19
TEST DATA	20
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	58
APPLICABLE STANDARD	58
TEST PROCEDURE	58

TEST EQUIPMENT LIST AND DETAILS.....	58
TEST DATA	58
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	80
APPLICABLE STANDARD	80
TEST PROCEDURE	80
TEST EQUIPMENT LIST AND DETAILS.....	80
TEST DATA	80
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	122
APPLICABLE STANDARD	122
TEST PROCEDURE	122
TEST EQUIPMENT LIST AND DETAILS.....	122
TEST DATA	122
FCC §15.247(e) - POWER SPECTRAL DENSITY	137
APPLICABLE STANDARD	137
TEST PROCEDURE	137
TEST EQUIPMENT LIST AND DETAILS.....	137
TEST DATA	137

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Actiontec Electronics, Inc.*'s product, model number: *MWTV2Tx (FCC ID: LNQMWTV2TX)* or ("EUT") in this report is a *MyWirelessTV 2 Wireless HD Transmitter*, which was measured approximately: 12.0 cm (L) x 10.4 cm (W) x 2.8 cm (H), rated input voltage: DC 5.0V from adapter.

Adapter information: Actiontec

Model name: WA-10P05FU

Input: 100-240Vac, 50-60Hz, 0.3A Max

Output: DC 5V, 2A

All measurement and test data in this report was gathered from production sample serial number: 140320052 (Assigned by BACL, Dongguan). The EUT was received on 2014-03-21.

Antenna information

Chain	Manufacturer	Model Name	Antenna Type	Max. Antenna Gain
0	Wha Yu	C787-510126-A	Dipole (PCB)	2400-2500MHz: 3.03dBi 4900-5825MHz: 5.14dBi
1	Wha Yu	C787-510126-A	Dipole (PCB)	2400-2500MHz: 3.03dBi 4900-5825MHz: 5.14dBi

Objective

This report is prepared on behalf of *Actiontec Electronics, Inc.* accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communications Commission rules.

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15E NII submissions with FCC ID: *LNQMWTV2TX*.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in testing mode, which was provided by manufacturer.
For 2.4GHz band, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11n ht20 modes were tested with Channel 1, 6 and 11. For 802.11n ht40 mode were tested with Channel 3, 6 and 9.

For 5725~5850MHz band, 8 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	159	5795
151	5755	161	5805
153	5765	165	5825
155	5775	/	/
157	5785	/	/

For 802.11a, 802.11n ht20, Channel 149, 157 and 165 was tested, for 802.11n ht40, Channel 151, 159 was tested.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

The software “AR6kArt2Win_SW.3110” was used for testing, which was provided by manufacturer. The worst condition (maximum power) was setting by the software as following table:

Test Mode	Test Software Version	AR6kArt2Win_SW.3110		
802.11b	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	1Mbps	1Mbps	1Mbps
	Power Level Setting Chain0	16	17.5	17
	Power Level Setting Chain1	16	17.5	17
802.11g	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	6Mbps	6Mbps	6Mbps
	Power Level Setting Chain0	12.5	17.5	15.5
	Power Level Setting Chain1	12.5	17.5	15.5
802.11n ht20	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	MCS8	MCS8	MCS8
	Power Level Setting Chain0	10	17.5	11
	Power Level Setting Chain1	10	17.5	11
802.11n ht40	Test Frequency	2422MHz	2437MHz	2452MHz
	Data Rate	MCS8	MCS8	MCS8
	Power Level Setting Chain0	9	17.5	11
	Power Level Setting Chain1	9	17.5	11
802.11 A	Test Frequency	5745MHz	5785MHz	5825MHz
	Data Rate	6Mbps	6Mbps	6Mbps
	Power Level Setting Chain0	12	22	13.5
	Power Level Setting Chain1	12	22	13.5
5G 802.11n ht20	Test Frequency	5745MHz	5785MHz	5825MHz
	Data Rate	MCS8	MCS8	MCS8
	Power Level Setting Chain0	8	22	11
	Power Level Setting Chain1	8	22	11
5G 802.11n ht40	Test Frequency	5755MHz	5795MHz	
	Data Rate	MCS8	MCS8	
	Power Level Setting Chain0	8	16	
	Power Level Setting Chain1	8	16	


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
SAMSUNG	Monitor	S22C330H	ZXDCHTHD101491K
ACER	Laptop	V3-551G-10462G50Makk	NXM0ACN0042410363C3400
Kingston	USB Disk	8GB	U01
Kingston	USB Disk	8GB	U02

External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Adapter DC Cable	No	No	1.58	Adapter	EUT
HDMI Cable	Yes	No	1.20	HDMI Port of Monitor	EUT
HDMI Cable	Yes	No	0.92	HDMI Port of Laptop	EUT
IR blaster Cable	No	No	1.53	IR Port of EUT	IR blaster

Block Diagram of Test Setup

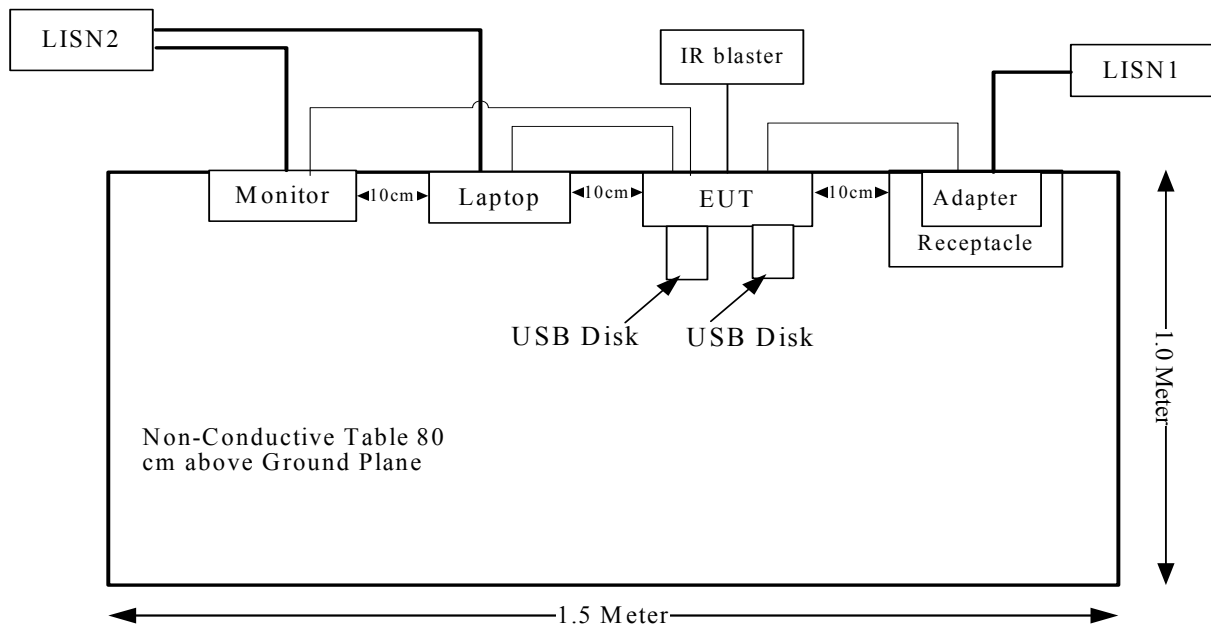

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum conducted output power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
2.4G-802.11b	2437	3.03	2.01	21.07	127.94	20	0.051	1.0
2.4G-802.11g	2437	3.03	2.01	21.65	146.22	20	0.058	1.0
2.4G-802.11n HT20	2437	3.03	2.01	22.64	183.65	20	0.073	1.0
2.4G-802.11n HT40	2437	3.03	2.01	22.57	180.72	20	0.072	1.0
802.11a	5785	5.14	3.27	17.61	57.68	20	0.037	1.0
5G-802.11n HT20	5785	5.14	3.27	20.30	107.15	20	0.070	1.0
5G-802.11n HT40	5795	5.14	3.27	16.43	43.95	20	0.029	1.0

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

This product used two internal dipole antennas which were connected to the mainboard with I-PEX socket, the maximum gain is 3.03dBi for 2.4G band and 5.14dBi for 5G band, which fulfill the requirement of this section, and please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cisp}

Measurement	U_{cisp}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

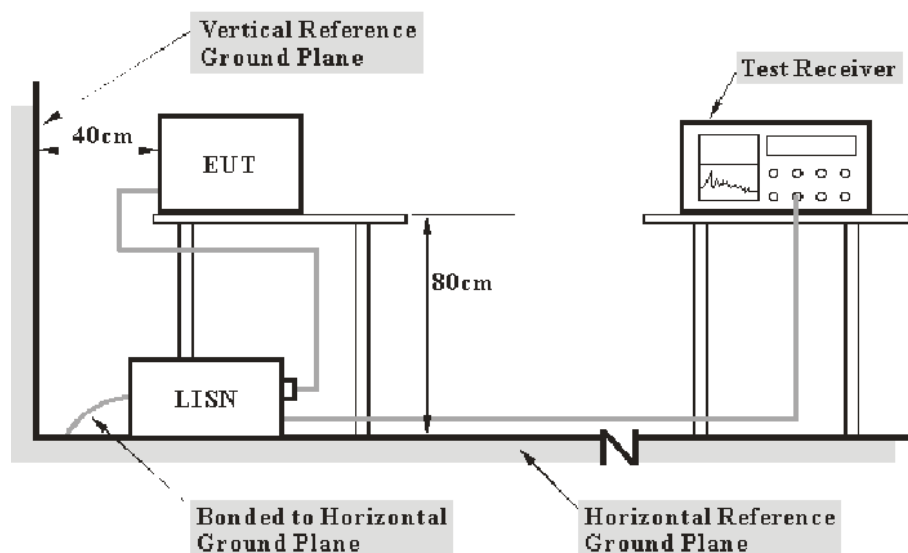

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2013-11-20	2014-11-19
R&S	Two-line V-network	ENV216	3560.6550.12	2014-01-22	2015-01-21
R&S	L.I.S.N	ESH3-Z5	100113	N/A	N/A
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

8.7 dB at 1.239175 MHz in the **Neutral** conducted mode


Test Data**Environmental Conditions**

Temperature:	25.2 °C
Relative Humidity:	54 %
ATM Pressure:	100.9 kPa

The testing was performed by Dean Liu on 2014-04-28.


Test Mode: Transmitting

AC120 V, 60 Hz, Line:

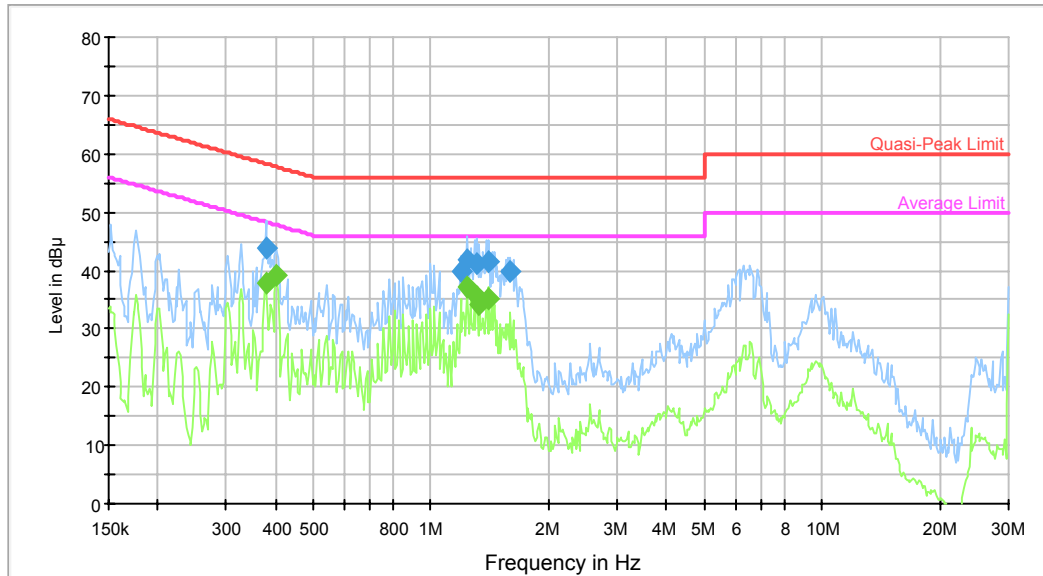

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.378019	43.7	9.000	L1	10.1	14.6	58.3	Compliance
1.190776	40.0	9.000	L1	9.7	16.0	56.0	Compliance
1.239175	41.7	9.000	L1	9.7	14.3	56.0	Compliance
1.310256	41.2	9.000	L1	9.7	14.8	56.0	Compliance
1.407671	41.6	9.000	L1	9.7	14.4	56.0	Compliance
1.599078	39.8	9.000	L1	9.7	16.2	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.378019	37.7	9.000	L1	10.1	10.6	48.3	Compliance
0.402900	39.0	9.000	L1	10.0	8.8	47.8	Compliance
1.239175	37.1	9.000	L1	9.7	8.9	46.0	Compliance
1.310256	35.5	9.000	L1	9.7	10.5	46.0	Compliance
1.331304	34.1	9.000	L1	9.7	11.9	46.0	Compliance
1.407671	35.2	9.000	L1	9.7	10.8	46.0	Compliance

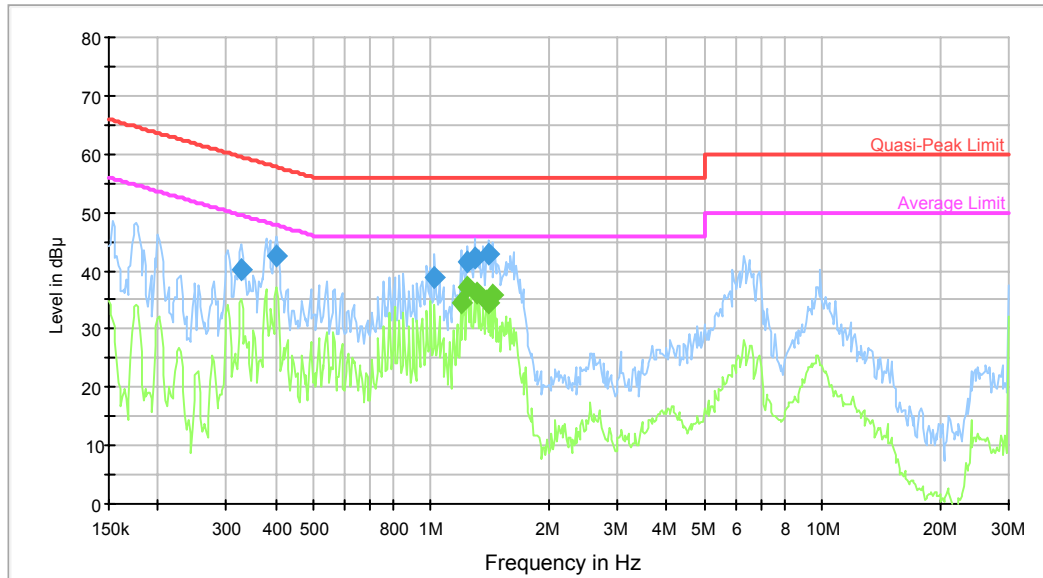AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.327509	40.2	9.000	N	10.4	19.3	59.5	Compliance
0.402900	42.5	9.000	N	10.2	15.3	57.8	Compliance
1.023481	38.8	9.000	N	9.8	17.2	56.0	Compliance
1.239175	41.6	9.000	N	9.8	14.4	56.0	Compliance
1.289541	42.2	9.000	N	9.8	13.8	56.0	Compliance
1.407671	42.8	9.000	N	9.8	13.2	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
1.190776	34.5	9.000	N	9.8	11.5	46.0	Compliance
1.239175	37.3	9.000	N	9.8	8.7	46.0	Compliance
1.310256	36.2	9.000	N	9.8	9.8	46.0	Compliance
1.385415	34.7	9.000	N	9.8	11.3	46.0	Compliance
1.407671	34.4	9.000	N	9.8	11.6	46.0	Compliance
1.430284	35.7	9.000	N	9.8	10.3	46.0	Compliance

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB


6G~18GHz: 5.23 dB


Table 2 – Values of U_{cisp}

Measurement	U_{cisp}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

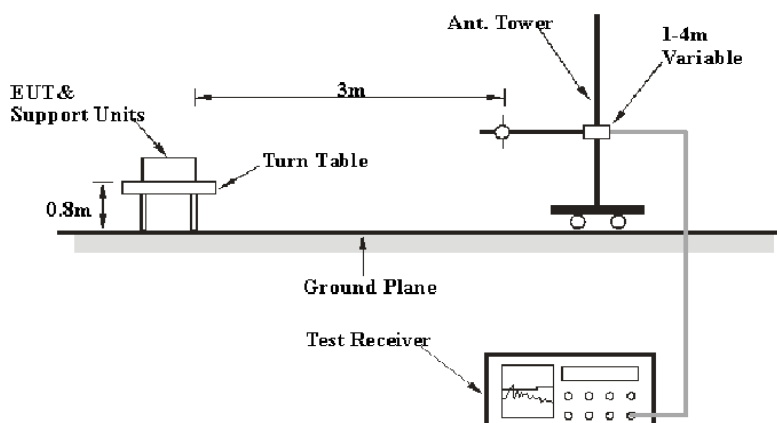

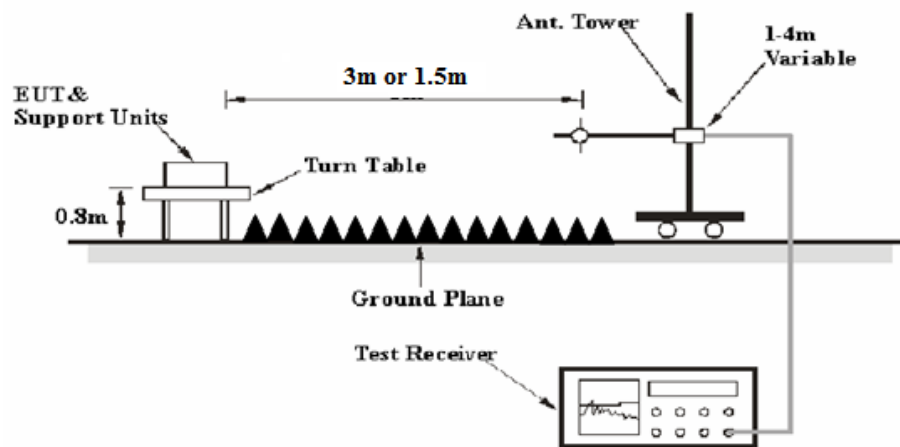Above 1GHz:

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209, and FCC 15.247 limits. The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

According to C63.4, the above 1G test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m

Distance extrapolation factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB

Extrapolation result = Corrected Amplitude (dBμV/m) - distance extrapolation factor (6dB)

or Limit line = Specific limits(dBμV) + distance extrapolation factor (6dB)

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Extrapolation result}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2013-05-05	2014-05-04
R&S	EMI Test Receiver	ESCI	100224	2014-05-05	2015-05-04
Sunol Sciences	Antenna	JB3	A060611-1	2011-09-06	2014-09-05
HP	Amplifier	8447E	2434A02181	2013-09-06	2014-09-05
R&S	Spectrum Analyzer	FSEM	DE31388	2013-05-05	2014-05-04
R&S	Spectrum Analyzer	FSEM	DE31388	2014-05-05	2015-05-04
ETS LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-05
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2014-02-19	2015-02-18
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2013-06-16	2014-06-15
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2013-06-16	2014-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2013-09-06	2014-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Section 15.205, 15.209 and 15.247, with the worst margin reading of:

0.12 dB at 5850 MHz in the Horizontal polarization for 802.11n ht40 Mode of 5GHz band

Test Data**Environmental Conditions**

Temperature:	23.4~26.7 °C
Relative Humidity:	64~68 %
ATM Pressure:	100.1~100.9 kPa

The testing was performed by Dean Liu from 2014-04-30 to 2014-05-13.

Mode: Transmitting

2.4GHz band:
802.11b Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	78.74	PK	H	25.67	4.42	0.00	108.83	N/A	N/A
2412	75.71	AV	H	25.67	4.42	0.00	105.80	N/A	N/A
2412	76.53	PK	V	25.67	4.42	0.00	106.62	N/A	N/A
2412	73.06	AV	V	25.67	4.42	0.00	103.15	N/A	N/A
2390	30.24	PK	H	25.61	4.39	0.00	60.24	74.00	13.76
2390	19.88	AV	H	25.61	4.39	0.00	49.88	54.00	4.12*
4824	39.41	PK	H	30.64	6.03	27.41	48.67	74.00	25.33
4824	31	AV	H	30.64	6.03	27.41	40.26	54.00	13.74
7236	31.26	PK	H	34.17	7.47	25.90	47.00	74.00	27.00
7236	19.16	AV	H	34.17	7.47	25.90	34.90	54.00	19.10
9648	29.13	PK	H	36.06	8.81	27.46	46.54	74.00	27.46
9648	19.72	AV	H	36.06	8.81	27.46	37.13	54.00	16.87
1362	30.11	PK	H	23.24	3.04	26.96	29.43	74.00	44.57
1362	13.29	AV	H	23.24	3.04	26.96	12.61	54.00	41.39
265	26.3	QP	H	13.37	1.96	21.50	20.13	46.00	25.87
Middle Channel: 2437 MHz									
2437	80.74	PK	H	25.74	4.41	0.00	110.89	N/A	N/A
2437	77.71	AV	H	25.74	4.41	0.00	107.86	N/A	N/A
2437	78.63	PK	V	25.74	4.41	0.00	108.78	N/A	N/A
2437	75.13	AV	V	25.74	4.41	0.00	105.28	N/A	N/A
4874	39.51	PK	H	30.77	6.09	27.42	48.95	74.00	25.05
4874	31.07	AV	H	30.77	6.09	27.42	40.51	54.00	13.49
7311	31.38	PK	H	34.35	7.51	25.88	47.36	74.00	26.64
7311	19.3	AV	H	34.35	7.51	25.88	35.28	54.00	18.72
9748	29.24	PK	H	36.30	8.83	27.24	47.13	74.00	26.87
9748	19.76	AV	H	36.30	8.83	27.24	37.65	54.00	16.35
2733	30.19	PK	H	26.51	5.04	27.51	34.23	74.00	39.77
2733	13.62	AV	H	26.51	5.04	27.51	17.66	54.00	36.34
1362	30.28	PK	H	23.24	3.04	26.96	29.60	74.00	44.40
1362	13.27	AV	H	23.24	3.04	26.96	12.59	54.00	41.41
265	26.8	QP	H	13.37	1.96	21.50	20.63	46.00	25.37
High Channel: 2462 MHz									
2462	79.14	PK	H	25.80	4.43	0.00	109.37	N/A	N/A
2462	74.93	AV	H	25.80	4.43	0.00	105.16	N/A	N/A
2462	77.54	PK	V	25.80	4.43	0.00	107.77	N/A	N/A
2462	74.18	AV	V	25.80	4.43	0.00	104.41	N/A	N/A
2483.5	30.05	PK	H	25.86	4.49	0.00	60.40	74.00	13.60
2483.5	17.95	AV	H	25.86	4.49	0.00	48.30	54.00	5.70
4924	40.12	PK	H	30.90	5.97	27.43	49.56	74.00	24.44
4924	32.19	AV	H	30.90	5.97	27.43	41.63	54.00	12.37
7386	32.15	PK	H	34.53	7.55	25.86	48.37	74.00	25.63
7386	18.64	AV	H	34.53	7.55	25.86	34.86	54.00	19.14
9848	32.73	PK	H	36.54	8.85	26.94	51.18	74.00	22.82
9848	19.52	AV	H	36.54	8.85	26.94	37.97	54.00	16.03
1362	30.54	PK	H	23.24	3.04	26.96	29.86	74.00	44.14
1362	13.46	AV	H	23.24	3.04	26.96	12.78	54.00	41.22
265	26.5	QP	H	13.37	1.96	21.50	20.33	46.00	25.67

*Within measurement uncertainty!

802.11g Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	77.43	PK	H	25.67	4.42	0.00	107.52	N/A	N/A
2412	68.65	AV	H	25.67	4.42	0.00	98.74	N/A	N/A
2412	75.37	PK	V	25.67	4.42	0.00	105.46	N/A	N/A
2412	66.11	AV	V	25.67	4.42	0.00	96.20	N/A	N/A
2483.5	41.49	PK	H	25.86	4.49	0.00	71.84	74.00	2.16*
2483.5	23.11	AV	H	25.86	4.49	0.00	53.46	54.00	0.54*
4824	38.15	PK	H	30.64	6.03	27.41	47.41	74.00	26.59
4824	25.82	AV	H	30.64	6.03	27.41	35.08	54.00	18.92
7236	31.2	PK	H	34.17	7.47	25.90	46.94	74.00	27.06
7236	19.11	AV	H	34.17	7.47	25.90	34.85	54.00	19.15
9648	29.12	PK	H	36.06	8.81	27.46	46.53	74.00	27.47
9648	19.63	AV	H	36.06	8.81	27.46	37.04	54.00	16.96
1362	30.04	PK	H	23.24	3.04	26.96	29.36	74.00	44.64
1362	13.28	AV	H	23.24	3.04	26.96	12.60	54.00	41.40
265	26.3	QP	H	13.37	1.96	21.50	20.13	46.00	25.87
Middle Channel: 2437 MHz									
2437	81.11	PK	H	25.74	4.41	0.00	111.26	N/A	N/A
2437	70.14	AV	H	25.74	4.41	0.00	100.29	N/A	N/A
2437	79.33	PK	V	25.74	4.41	0.00	109.48	N/A	N/A
2437	69.09	AV	V	25.74	4.41	0.00	99.24	N/A	N/A
4874	37.63	PK	H	30.77	6.09	27.42	47.07	74.00	26.93
4874	26.31	AV	H	30.77	6.09	27.42	35.75	54.00	18.25
7311	31.18	PK	H	34.35	7.51	25.88	47.16	74.00	26.84
7311	19.08	AV	H	34.35	7.51	25.88	35.06	54.00	18.94
9748	29.04	PK	H	36.30	8.83	27.24	46.93	74.00	27.07
9748	19.57	AV	H	36.30	8.83	27.24	37.46	54.00	16.54
2733	29.96	PK	H	26.51	5.04	27.51	34.00	74.00	40.00
2733	13.76	AV	H	26.51	5.04	27.51	17.80	54.00	36.20
1362	29.87	PK	H	23.24	3.04	26.96	29.19	74.00	44.81
1362	13.55	AV	H	23.24	3.04	26.96	12.87	54.00	41.13
265	26.7	QP	H	13.37	1.96	21.50	20.53	46.00	25.47
High Channel: 2462 MHz									
2462	78.47	PK	H	25.80	4.43	0.00	108.70	N/A	N/A
2462	69.12	AV	H	25.80	4.43	0.00	99.35	N/A	N/A
2462	78.19	PK	V	25.80	4.43	0.00	108.42	N/A	N/A
2462	68.75	AV	V	25.80	4.43	0.00	98.98	N/A	N/A
2483.5	38.16	PK	H	25.86	4.49	0.00	68.51	74.00	5.49
2483.5	22.99	AV	H	25.86	4.49	0.00	53.34	54.00	0.66*
4924	38.24	PK	H	30.90	5.97	27.43	47.68	74.00	26.32
4924	25.89	AV	H	30.90	5.97	27.43	35.33	54.00	18.67
7386	31.26	PK	H	34.53	7.55	25.86	47.48	74.00	26.52
7386	19.19	AV	H	34.53	7.55	25.86	35.41	54.00	18.59
9848	29.2	PK	H	36.54	8.85	26.94	47.65	74.00	26.35
9848	19.68	AV	H	36.54	8.85	26.94	38.13	54.00	15.87
1362	30.07	PK	H	23.24	3.04	26.96	29.39	74.00	44.61
1362	13.37	AV	H	23.24	3.04	26.96	12.69	54.00	41.31
265	26.8	QP	H	13.37	1.96	21.50	20.63	46.00	25.37

*Within measurement uncertainty!

802.11 n ht20 Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	76.79	PK	H	25.67	4.42	0.00	106.88	N/A	N/A
2412	66.19	AV	H	25.67	4.42	0.00	96.28	N/A	N/A
2412	74.95	PK	V	25.67	4.42	0.00	105.04	N/A	N/A
2412	65.2	AV	V	25.67	4.42	0.00	95.29	N/A	N/A
2390	37.95	PK	H	25.61	4.39	0.00	67.95	74.00	6.05
2390	20.82	AV	H	25.61	4.39	0.00	50.82	54.00	3.18*
4824	35.41	PK	H	30.64	6.03	27.41	44.67	74.00	29.33
4824	21.61	AV	H	30.64	6.03	27.41	30.87	54.00	23.13
7236	31.06	PK	H	34.17	7.47	25.90	46.80	74.00	27.20
7236	18.98	AV	H	34.17	7.47	25.90	34.72	54.00	19.28
9648	29.04	PK	H	36.06	8.81	27.46	46.45	74.00	27.55
9648	19.55	AV	H	36.06	8.81	27.46	36.96	54.00	17.04
1362	29.98	PK	H	23.24	3.04	26.96	29.30	74.00	44.70
1362	13.12	AV	H	23.24	3.04	26.96	12.44	54.00	41.56
265	26.15	QP	H	13.37	1.96	21.50	19.98	46.00	26.02
Middle Channel: 2437 MHz									
2437	81.54	PK	H	25.74	4.41	0.00	111.69	N/A	N/A
2437	70.31	AV	H	25.74	4.41	0.00	100.46	N/A	N/A
2437	79.02	PK	V	25.74	4.41	0.00	109.17	N/A	N/A
2437	67.38	AV	V	25.74	4.41	0.00	97.53	N/A	N/A
4874	35.02	PK	H	30.77	6.09	27.42	44.46	74.00	29.54
4874	21.36	AV	H	30.77	6.09	27.42	30.80	54.00	23.20
7311	31.13	PK	H	34.35	7.51	25.88	47.11	74.00	26.89
7311	19.01	AV	H	34.35	7.51	25.88	34.99	54.00	19.01
9748	29.02	PK	H	36.30	8.83	27.24	46.91	74.00	27.09
9748	19.47	AV	H	36.30	8.83	27.24	37.36	54.00	16.64
2733	30.25	PK	H	26.51	5.04	27.51	34.29	74.00	39.71
2733	13.68	AV	H	26.51	5.04	27.51	17.72	54.00	36.28
1362	31.69	PK	H	23.24	3.04	26.96	31.01	74.00	42.99
1362	13.46	AV	H	23.24	3.04	26.96	12.78	54.00	41.22
265	26.50	QP	H	13.37	1.96	21.50	20.33	46.00	25.67
High Channel: 2462 MHz									
2462	76.7	PK	H	25.80	4.43	0.00	106.93	N/A	N/A
2462	66.17	AV	H	25.80	4.43	0.00	96.40	N/A	N/A
2462	74.79	PK	V	25.80	4.43	0.00	105.02	N/A	N/A
2462	65.06	AV	V	25.80	4.43	0.00	95.29	N/A	N/A
2483.5	36.77	PK	H	25.86	4.49	0.00	67.12	74.00	6.88
2483.5	20.62	AV	H	25.86	4.49	0.00	50.97	54.00	3.03*
4924	35.23	PK	H	30.90	5.97	27.43	44.67	74.00	29.33
4924	21.49	AV	H	30.90	5.97	27.43	30.93	54.00	23.07
7386	30.88	PK	H	34.53	7.55	25.86	47.10	74.00	26.90
7386	18.85	AV	H	34.53	7.55	25.86	35.07	54.00	18.93
9848	28.88	PK	H	36.54	8.85	26.94	47.33	74.00	26.67
9848	19.47	AV	H	36.54	8.85	26.94	37.92	54.00	16.08
1362	29.83	PK	H	23.24	3.04	26.96	29.15	74.00	44.85
1362	13.98	AV	H	23.24	3.04	26.96	13.30	54.00	40.70
265	27.30	QP	H	13.37	1.96	21.50	21.13	46.00	24.87

*Within measurement uncertainty!

802.11 n ht40 Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2422 MHz									
2422	71.55	PK	H	25.70	4.41	0.00	101.66	N/A	N/A
2422	60.72	AV	H	25.70	4.41	0.00	90.83	N/A	N/A
2422	71.54	PK	V	25.70	4.41	0.00	101.65	N/A	N/A
2422	60.09	AV	V	25.70	4.41	0.00	90.20	N/A	N/A
2390	42.62	PK	H	25.61	4.39	0.00	72.62	74.00	1.38*
2390	22.62	AV	H	25.61	4.39	0.00	52.62	54.00	1.38*
4844	33.15	PK	H	30.69	6.08	27.42	42.50	74.00	31.50
4844	19.30	AV	H	30.69	6.08	27.42	28.65	54.00	25.35
7266	31.13	PK	H	34.24	7.48	25.89	46.96	74.00	27.04
7266	19.05	AV	H	34.24	7.48	25.89	34.88	54.00	19.12
9688	29.06	PK	H	36.15	8.82	27.37	46.66	74.00	27.34
9688	19.64	AV	H	36.15	8.82	27.37	37.24	54.00	16.76
1362	30.03	PK	H	23.24	3.04	26.96	29.35	74.00	44.65
1362	13.15	AV	H	23.24	3.04	26.96	12.47	54.00	41.53
265	26.10	QP	H	13.37	1.96	21.50	19.93	46.00	26.07
Middle Channel: 2437 MHz									
2437	78.76	PK	H	25.74	4.41	0.00	108.91	N/A	N/A
2437	66.19	AV	H	25.74	4.41	0.00	96.34	N/A	N/A
2437	78.68	PK	V	25.74	4.41	0.00	108.83	N/A	N/A
2437	66.52	AV	V	25.74	4.41	0.00	96.67	N/A	N/A
4874	33.41	PK	H	30.77	6.09	27.42	42.85	74.00	31.15
4874	19.56	AV	H	30.77	6.09	27.42	29.00	54.00	25.00
7311	31.13	PK	H	34.35	7.51	25.88	47.11	74.00	26.89
7311	19.10	AV	H	34.35	7.51	25.88	35.08	54.00	18.92
9748	29.09	PK	H	36.30	8.83	27.24	46.98	74.00	27.02
9748	19.57	AV	H	36.30	8.83	27.24	37.46	54.00	16.54
2733	30.25	PK	H	26.51	5.04	27.51	34.29	74.00	39.71
2733	13.75	AV	H	26.51	5.04	27.51	17.79	54.00	36.21
1362	31.74	PK	H	23.24	3.04	26.96	31.06	74.00	42.94
1362	13.55	AV	H	23.24	3.04	26.96	12.87	54.00	41.13
265	26.20	QP	H	13.37	1.96	21.50	20.03	46.00	25.97
High Channel: 2452 MHz									
2452	73.57	PK	H	25.78	4.41	0.00	103.76	N/A	N/A
2452	62.21	AV	H	25.78	4.41	0.00	92.40	N/A	N/A
2452	72.14	PK	V	25.78	4.41	0.00	102.33	N/A	N/A
2452	61.5	AV	V	25.78	4.41	0.00	91.69	N/A	N/A
2483.5	40.05	PK	H	25.86	4.49	0.00	70.40	74.00	3.60*
2483.5	21.57	AV	H	25.86	4.49	0.00	51.92	54.00	2.08*
4904	34.25	PK	H	30.85	6.06	27.43	43.73	74.00	30.27
4904	20.56	AV	H	30.85	6.06	27.43	30.04	54.00	23.96
7356	30.96	PK	H	34.45	7.53	25.87	47.07	74.00	26.93
7356	18.91	AV	H	34.45	7.53	25.87	35.02	54.00	18.98
9808	28.91	PK	H	36.44	8.84	27.09	47.10	74.00	26.90
9808	19.51	AV	H	36.44	8.84	27.09	37.70	54.00	16.30
1362	29.92	PK	H	23.24	3.04	26.96	29.24	74.00	44.76
1362	14.04	AV	H	23.24	3.04	26.96	13.36	54.00	40.64
265	26.90	QP	H	13.37	1.96	21.50	20.73	46.00	25.27

*Within measurement uncertainty!

5725-5850MHz band: (Note: For above 1GHz, the test distance is 1.5m)
802.11a Mode:

Frequency	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
(MHz)	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)						
Low Channel:5745 MHz										
5745	62.81	PK	H	32.15	6.10	0.00	101.06	95.06	N/A	N/A
5745	55.15	AV	H	32.15	6.10	0.00	93.40	87.40	N/A	N/A
5745	62.39	PK	V	32.15	6.10	0.00	100.64	94.64	N/A	N/A
5745	55.18	AV	V	32.15	6.10	0.00	93.43	87.43	N/A	N/A
5725	37.52	PK	H	32.15	6.04	0.00	75.71	69.71	74.00	4.29*
5725	20.76	AV	H	32.15	6.04	0.00	58.95	52.95	54.00	1.05*
11490	34.36	PK	H	37.89	9.86	26.14	55.97	49.97	74.00	24.03
11490	18.35	AV	H	37.89	9.86	26.14	39.96	33.96	54.00	20.04
17235	30.11	PK	H	40.91	14.02	25.63	59.41	53.41	74.00	20.59
17235	19.60	AV	H	40.91	14.02	25.63	48.90	42.90	54.00	11.10
2361	31.54	PK	H	25.54	4.31	27.31	34.08	28.08	74.00	45.92
2361	13.96	AV	H	25.54	4.31	27.31	16.50	10.50	54.00	43.50
3266	32.05	PK	H	28.05	6.13	27.31	38.92	32.92	74.00	41.08
3266	14.27	AV	H	28.05	6.13	27.31	21.14	15.14	54.00	38.86
325	28.10	QP	H	14.61	2.16	21.58	23.29	/	46.00	22.71
Middle Channel:5785 MHz										
5785	71.71	PK	H	32.16	6.12	0.00	109.99	103.99	N/A	N/A
5785	60.85	AV	H	32.16	6.12	0.00	99.13	93.13	N/A	N/A
5785	69.43	PK	V	32.16	6.12	0.00	107.71	101.71	N/A	N/A
5785	60.82	AV	V	32.16	6.12	0.00	99.10	93.10	N/A	N/A
11570	36.59	PK	H	37.90	9.76	26.07	58.18	52.18	74.00	21.82
11570	20.52	AV	H	37.90	9.76	26.07	42.11	36.11	54.00	17.89
17355	30.14	PK	H	41.63	13.37	25.63	59.51	53.51	74.00	20.49
17355	19.63	AV	H	41.63	13.37	25.63	49.00	43.00	54.00	11.00
1672	30.13	PK	H	23.94	3.40	27.71	29.76	23.76	74.00	50.24
1672	13.75	AV	H	23.94	3.40	27.71	13.38	7.38	54.00	46.62
2361	31.62	PK	H	25.54	4.31	27.31	34.16	28.16	74.00	45.84
2361	14.15	AV	H	25.54	4.31	27.31	16.69	10.69	54.00	43.31
3266	32.08	PK	H	28.05	6.13	27.31	38.95	32.95	74.00	41.05
3266	14.44	AV	H	28.05	6.13	27.31	21.31	15.31	54.00	38.69
325	28.40	QP	H	14.61	2.16	21.58	23.59	/	46.00	22.41

High Channel:5825 MHz										
5825	64.41	PK	H	32.17	6.24	0.00	102.82	96.82	N/A	N/A
5825	56.88	AV	H	32.17	6.24	0.00	95.29	89.29	N/A	N/A
5825	64.59	PK	V	32.17	6.24	0.00	103.00	97.00	N/A	N/A
5825	56.12	AV	V	32.17	6.24	0.00	94.53	88.53	N/A	N/A
5850	35.04	PK	H	32.17	6.34	0.00	73.55	67.55	74.00	6.45
5850	20.31	AV	H	32.17	6.34	0.00	58.82	52.82	54.00	1.18*
11650	34.17	PK	H	37.90	9.63	25.75	55.95	49.95	74.00	24.05
11650	18.19	AV	H	37.90	9.63	25.75	39.97	33.97	54.00	20.03
17475	30.01	PK	H	42.35	12.73	25.39	59.70	53.70	74.00	20.30
17475	19.43	AV	H	42.35	12.73	25.39	49.12	43.12	54.00	10.88
2361	31.44	PK	H	25.54	4.31	27.31	33.98	27.98	74.00	46.02
2361	13.86	AV	H	25.54	4.31	27.31	16.40	10.40	54.00	43.60
3266	31.93	PK	H	28.05	6.13	27.31	38.80	32.80	74.00	41.20
3266	14.16	AV	H	28.05	6.13	27.31	21.03	15.03	54.00	38.97
325	28.00	QP	H	14.61	2.16	21.58	23.19	/	46.00	22.81

*Within measurement uncertainty!

802.11n ht20 Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)							
Low Channel:5745 MHz										
5745	68.74	PK	H	32.15	6.10	0.00	106.99	100.99	N/A	N/A
5745	59.38	AV	H	32.15	6.10	0.00	97.63	91.63	N/A	N/A
5745	68.23	PK	V	32.15	6.10	0.00	106.48	100.48	N/A	N/A
5745	59.01	AV	V	32.15	6.10	0.00	97.26	91.26	N/A	N/A
5725	37.39	PK	H	32.15	6.04	0.00	75.58	69.58	74.00	4.42*
5725	20.94	AV	H	32.15	6.04	0.00	59.13	53.13	54.00	0.87*
11490	36.38	PK	H	37.89	9.86	26.14	57.99	51.99	74.00	22.01
11490	20.42	AV	H	37.89	9.86	26.14	42.03	36.03	54.00	17.97
17235	30.2	PK	H	40.91	14.02	25.63	59.50	53.50	74.00	20.50
17235	19.71	AV	H	40.91	14.02	25.63	49.01	43.01	54.00	10.99
2361	31.65	PK	H	25.54	4.31	27.31	34.19	28.19	74.00	45.81
2361	14.09	AV	H	25.54	4.31	27.31	16.63	10.63	54.00	43.37
3266	32.16	PK	H	28.05	6.13	27.31	39.03	33.03	74.00	40.97
3266	14.37	AV	H	28.05	6.13	27.31	21.24	15.24	54.00	38.76
325	28.20	QP	H	14.61	2.16	21.58	23.39	/	46.00	22.61
Middle Channel:5785 MHz										
5785	75.92	PK	H	32.16	6.12	0.00	114.20	108.20	N/A	N/A
5785	64.38	AV	H	32.16	6.12	0.00	102.66	96.66	N/A	N/A
5785	74.78	PK	V	32.16	6.12	0.00	113.06	107.06	N/A	N/A
5785	62.90	AV	V	32.16	6.12	0.00	101.18	95.18	N/A	N/A
11570	42.33	PK	H	37.90	9.76	26.07	63.92	57.92	74.00	16.08
11570	25.21	AV	H	37.90	9.76	26.07	46.80	40.80	54.00	13.20
17355	30.31	PK	H	41.63	13.37	25.63	59.68	53.68	74.00	20.32
17355	19.82	AV	H	41.63	13.37	25.63	49.19	43.19	54.00	10.81
1672	30.16	PK	H	23.94	3.40	27.71	29.79	23.79	74.00	50.21
1672	13.76	AV	H	23.94	3.40	27.71	13.39	7.39	54.00	46.61
2361	31.62	PK	H	25.54	4.31	27.31	34.16	28.16	74.00	45.84
2361	14.24	AV	H	25.54	4.31	27.31	16.78	10.78	54.00	43.22
3266	32.18	PK	H	28.05	6.13	27.31	39.05	33.05	74.00	40.95
3266	14.62	AV	H	28.05	6.13	27.31	21.49	15.49	54.00	38.51
325	28.60	QP	H	14.61	2.16	21.58	23.79	/	46.00	22.21


High Channel:5825 MHz										
5825	68.69	PK	H	32.17	6.24	0.00	107.10	101.10	N/A	N/A
5825	60.09	AV	H	32.17	6.24	0.00	98.50	92.50	N/A	N/A
5825	68.61	PK	V	32.17	6.24	0.00	107.02	101.02	N/A	N/A
5825	60.36	AV	V	32.17	6.24	0.00	98.77	92.77	N/A	N/A
5850	35.51	PK	H	32.17	6.34	0.00	74.02	68.02	74.00	5.98
5850	21.27	AV	H	32.17	6.34	0.00	59.78	53.78	54.00	0.22*
11650	36.27	PK	H	37.90	9.63	25.75	58.05	52.05	74.00	21.95
11650	20.19	AV	H	37.90	9.63	25.75	41.97	35.97	54.00	18.03
17475	30.03	PK	H	42.35	12.73	25.39	59.72	53.72	74.00	20.28
17475	19.51	AV	H	42.35	12.73	25.39	49.20	43.20	54.00	10.80
2361	31.62	PK	H	25.54	4.31	27.31	34.16	28.16	74.00	45.84
2361	13.94	AV	H	25.54	4.31	27.31	16.48	10.48	54.00	43.52
3266	32.05	PK	H	28.05	6.13	27.31	38.92	32.92	74.00	41.08
3266	14.21	AV	H	28.05	6.13	27.31	21.08	15.08	54.00	38.92
325	27.90	QP	H	14.61	2.16	21.58	23.09	/	46.00	22.91

*Within measurement uncertainty!


802.11n ht40 Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)							
Low Channel:5755 MHz										
5755	64.21	PK	H	32.15	6.11	0.00	102.47	96.47	N/A	N/A
5755	53.67	AV	H	32.15	6.11	0.00	91.93	85.93	N/A	N/A
5755	63.63	PK	V	32.15	6.11	0.00	101.89	95.89	N/A	N/A
5755	53.65	AV	V	32.15	6.11	0.00	91.91	85.91	N/A	N/A
5725	40.43	PK	H	32.15	6.04	0.00	78.62	72.62	74.00	1.38*
5725	21.52	AV	H	32.15	6.04	0.00	59.71	53.71	54.00	0.29*
11490	35.27	PK	H	37.89	9.86	26.14	56.88	50.88	74.00	23.12
11490	20.37	AV	H	37.89	9.86	26.14	41.98	35.98	54.00	18.02
17235	31.09	PK	H	40.91	14.02	25.63	60.39	54.39	74.00	19.61
17235	19.58	AV	H	40.91	14.02	25.63	48.88	42.88	54.00	11.12
2361	31.57	PK	H	25.54	4.31	27.31	34.11	28.11	74.00	45.89
2361	13.97	AV	H	25.54	4.31	27.31	16.51	10.51	54.00	43.49
3266	33.11	PK	H	28.05	6.13	27.31	39.98	33.98	74.00	40.02
3266	14.18	AV	H	28.05	6.13	27.31	21.05	15.05	54.00	38.95
325	28.1	QP	H	14.61	2.16	21.58	23.29	/	46.00	22.71
High Channel:5795 MHz										
5795	73.03	PK	H	32.16	6.13	0.00	111.32	105.32	N/A	N/A
5795	61.99	AV	H	32.16	6.13	0.00	100.28	94.28	N/A	N/A
5795	72.83	PK	V	32.16	6.13	0.00	111.12	105.12	N/A	N/A
5795	61.29	AV	V	32.16	6.13	0.00	99.58	93.58	N/A	N/A
5850	34.77	PK	H	32.17	6.34	0.00	73.28	67.28	74.00	6.72
5850	21.37	AV	H	32.17	6.34	0.00	59.88	53.88	54.00	0.12*
11590	38.26	PK	H	37.90	9.73	26.06	59.83	53.83	74.00	20.17
11590	23.18	AV	H	37.90	9.73	26.06	44.75	38.75	54.00	15.25
17385	29.89	PK	H	41.81	13.21	25.63	59.28	53.28	74.00	20.72
17385	19.33	AV	H	41.81	13.21	25.63	48.72	42.72	54.00	11.28
2361	31.43	PK	H	25.54	4.31	27.31	33.97	27.97	74.00	46.03
2361	14.13	AV	H	25.54	4.31	27.31	16.67	10.67	54.00	43.33
3266	31.9	PK	H	28.05	6.13	27.31	38.77	32.77	74.00	41.23
3266	14.18	AV	H	28.05	6.13	27.31	21.05	15.05	54.00	38.95
325	27.86	QP	H	14.61	2.16	21.58	23.05	/	46.00	22.95

*Within measurement uncertainty!

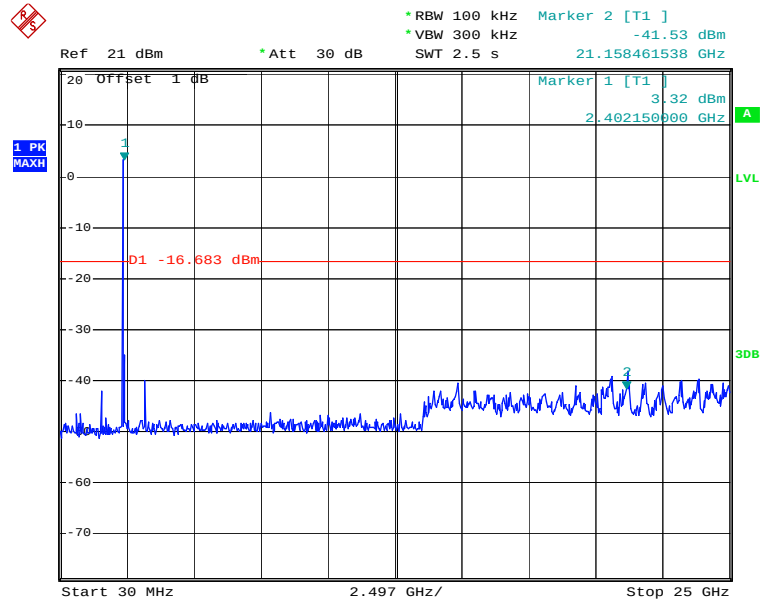
Conducted Spurious Emissions at Antenna Port**2.4GHz band:****Chain0: 802.11b Low Channel**

Date: 30.APR.2014 13:27:58

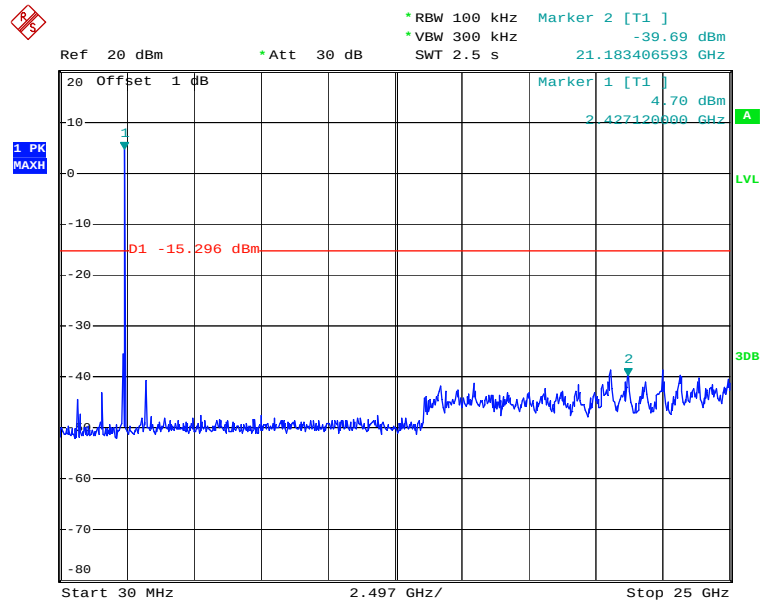Chain0: 802.11b Middle Channel


Date: 30.APR.2014 13:29:36

Chain0: 802.11b High Channel

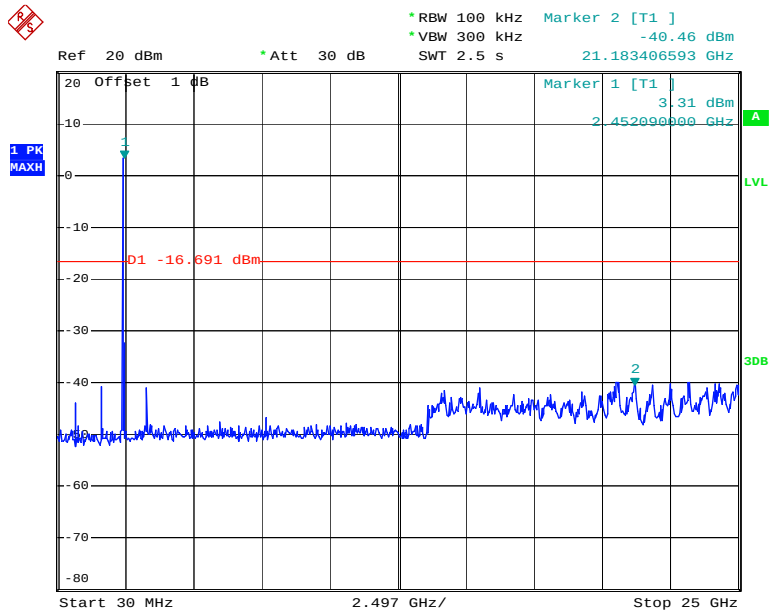


Date: 30.APR.2014 13:30:58

Chain1: 802.11b Low Channel

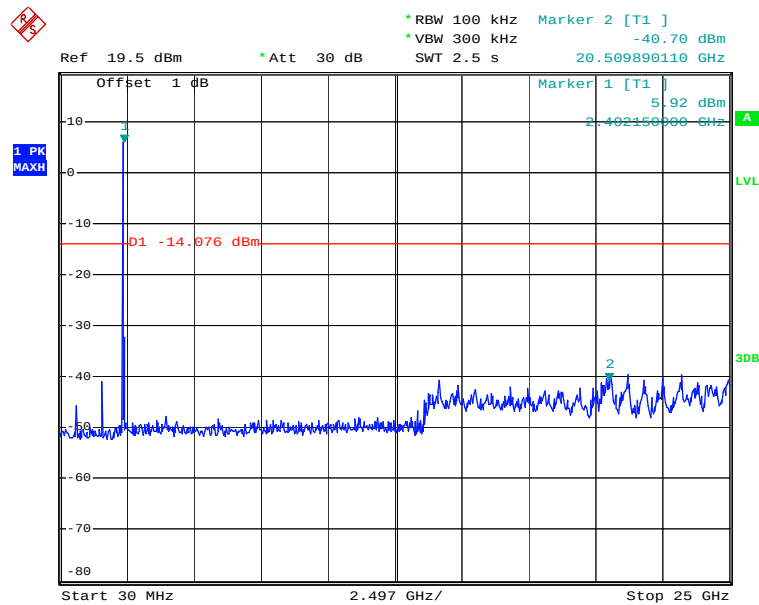


Date: 9.MAY.2014 16:38:11

Chain1: 802.11b Middle Channel

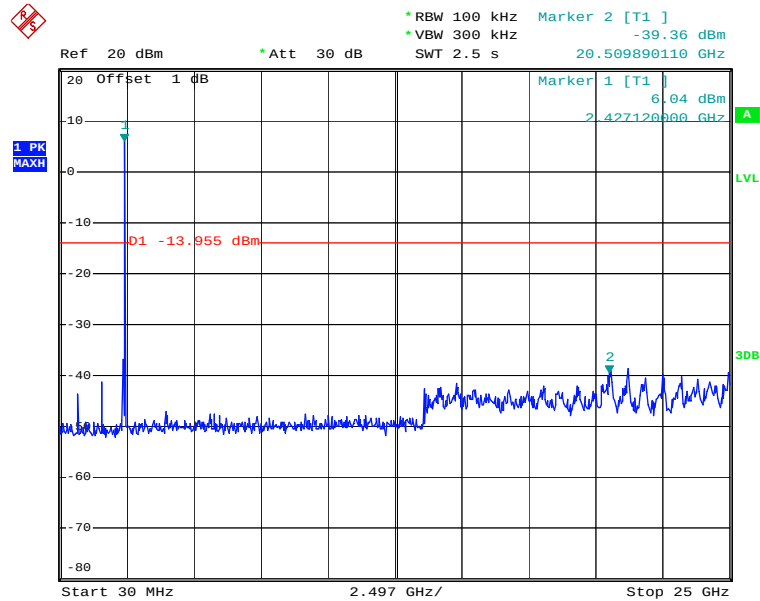


Date: 9.MAY.2014 16:40:10

Chain1: 802.11b High Channel

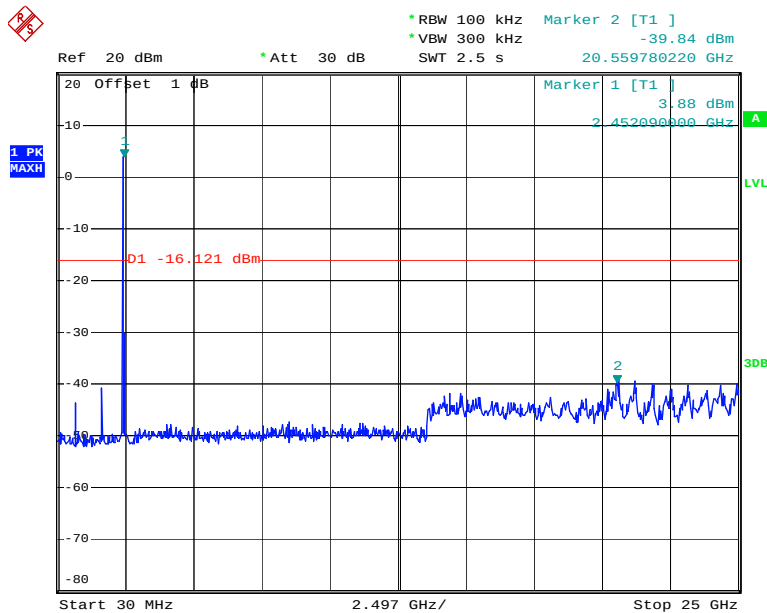


Date: 9.MAY.2014 16:41:47

Chain0: 802.11g Low Channel

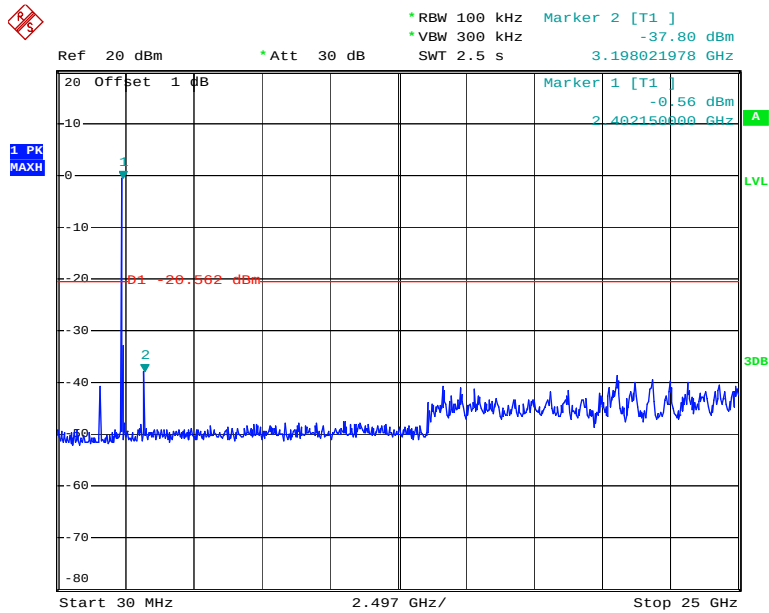


Date: 30.APR.2014 13:36:01

Chain0: 802.11g Middle Channel

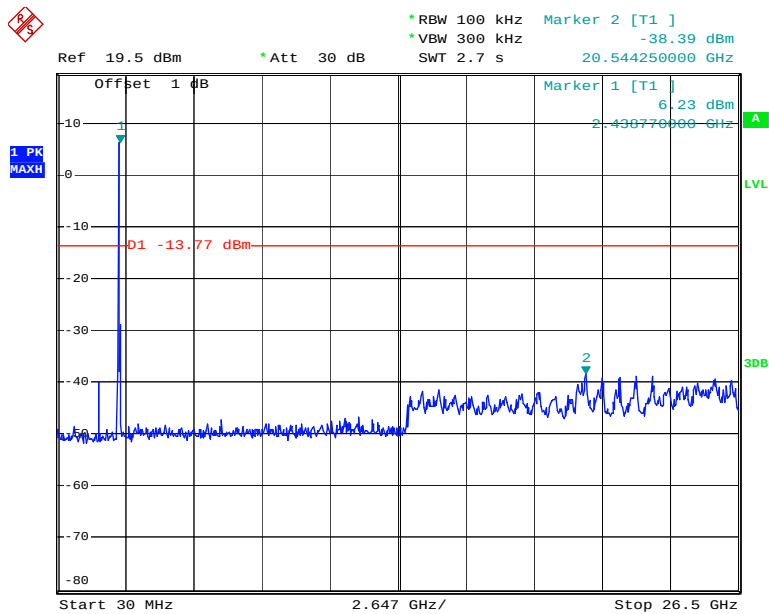


Date: 12.MAY.2014 17:27:16

Chain0: 802.11g High Channel

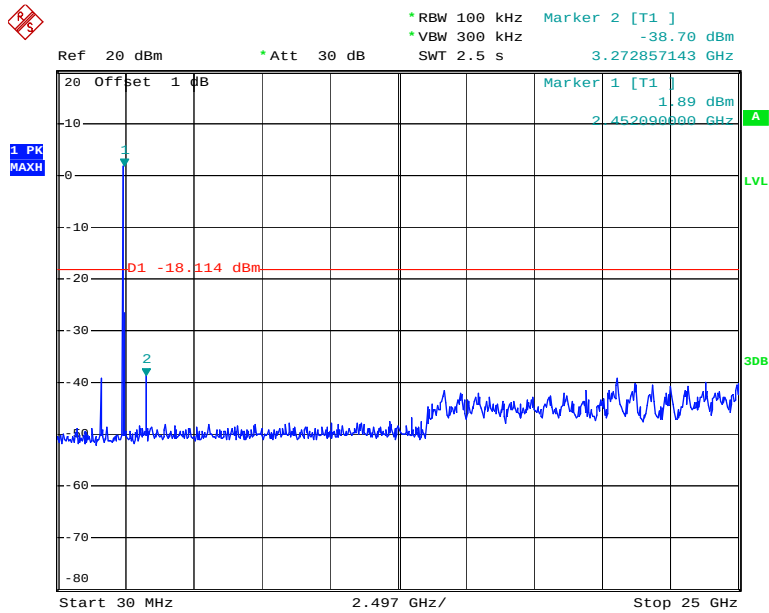


Date: 30.APR.2014 13:40:04

Chain1: 802.11g Low Channel

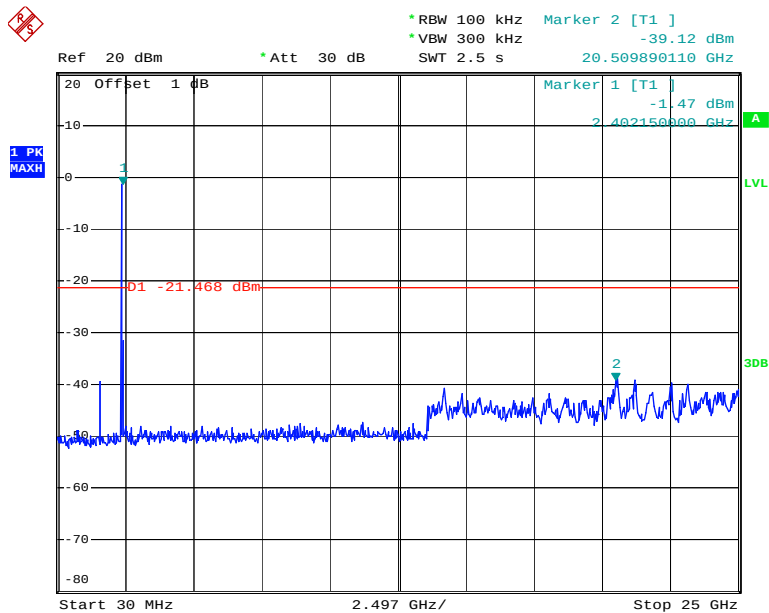


Date: 9.MAY.2014 16:47:46

Chain1: 802.11g Middle Channel

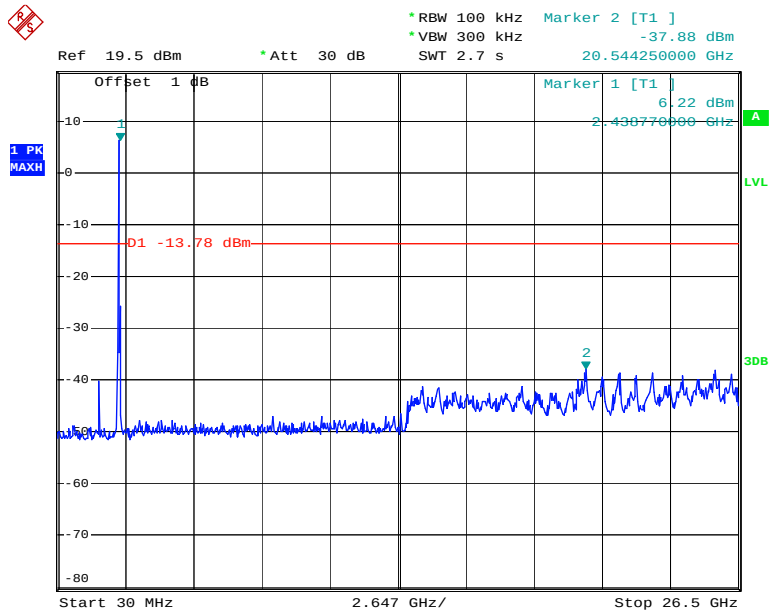


Date: 12.MAY.2014 17:28:12

Chain1: 802.11g High Channel

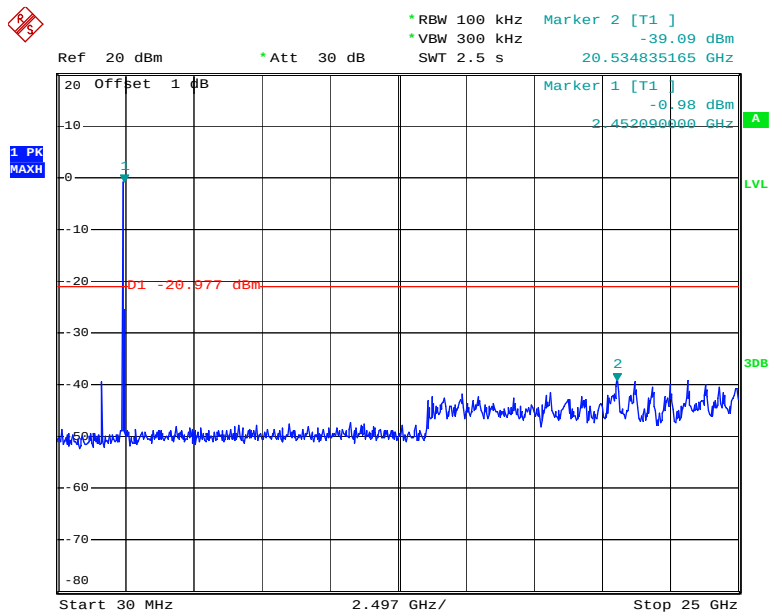


Date: 9.MAY.2014 16:44:06

Chain 0: 802.11n ht20 Low Channel

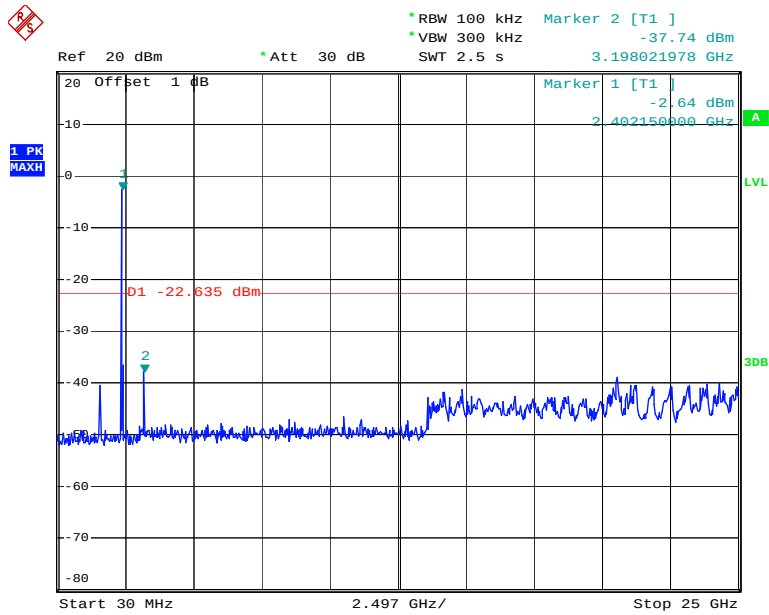


Date: 30.APR.2014 13:42:37

Chain 0: 802.11n ht20 Middle Channel

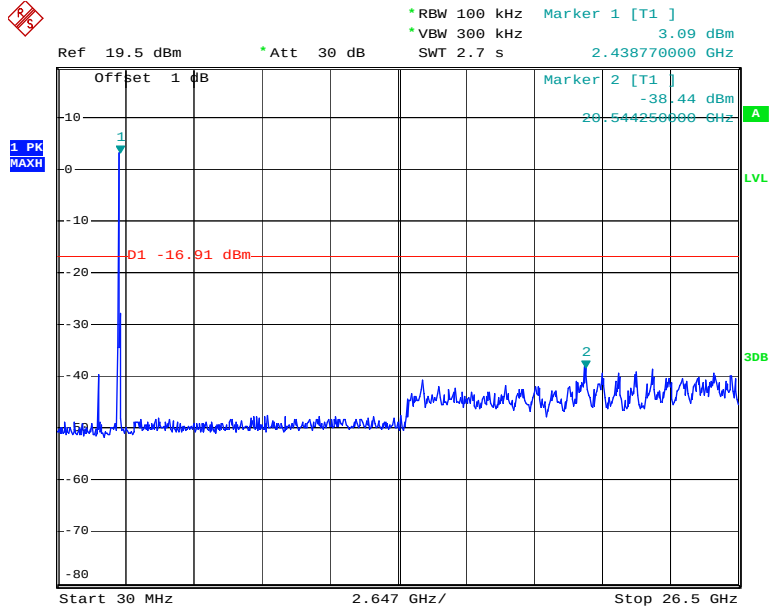


Date: 12.MAY.2014 17:32:43

Chain 0: 802.11n ht20 High Channel

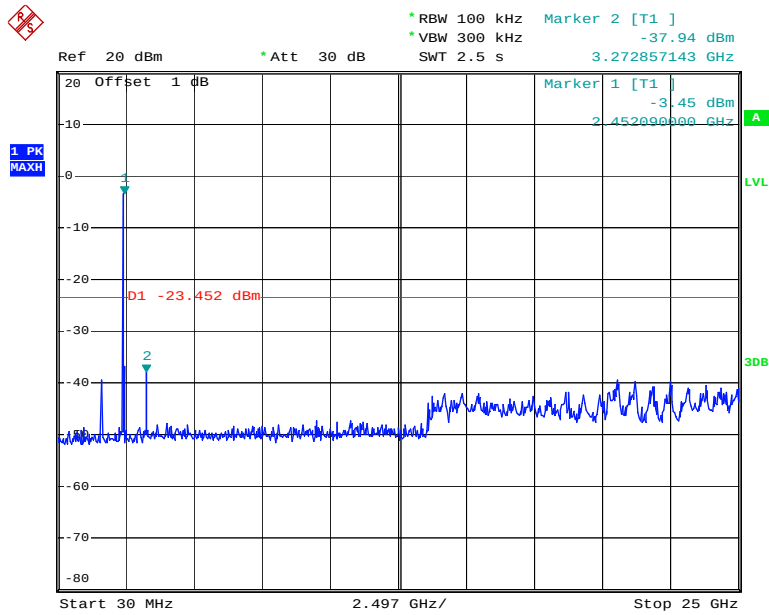


Date: 30.APR.2014 13:49:41

Chain 1: 802.11n ht20 Low Channel

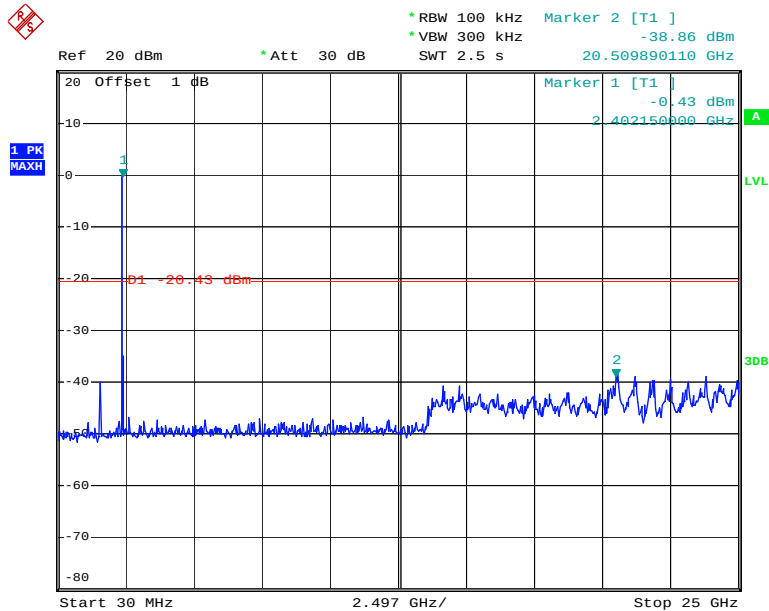


Date: 30.APR.2014 13:44:35

Chain 1: 802.11n ht20 Middle Channel

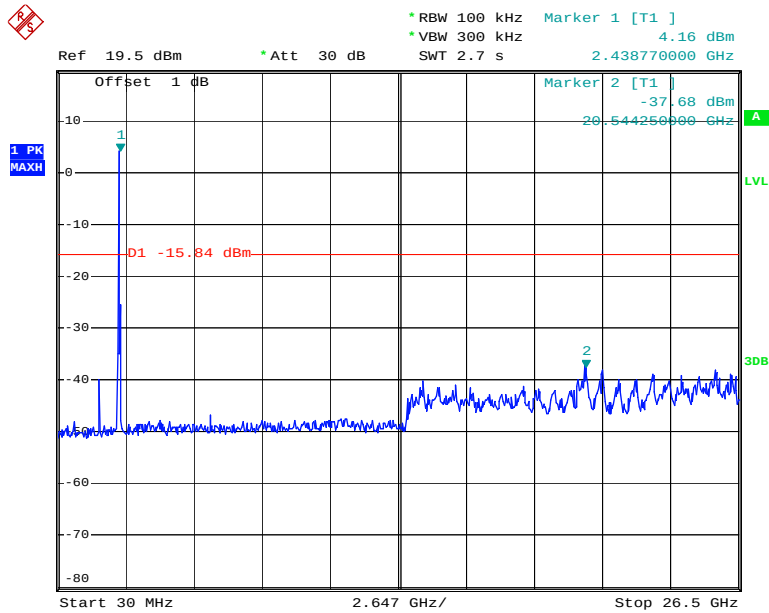


Date: 12.MAY.2014 17:30:13

Chain 1: 802.11n ht20 High Channel

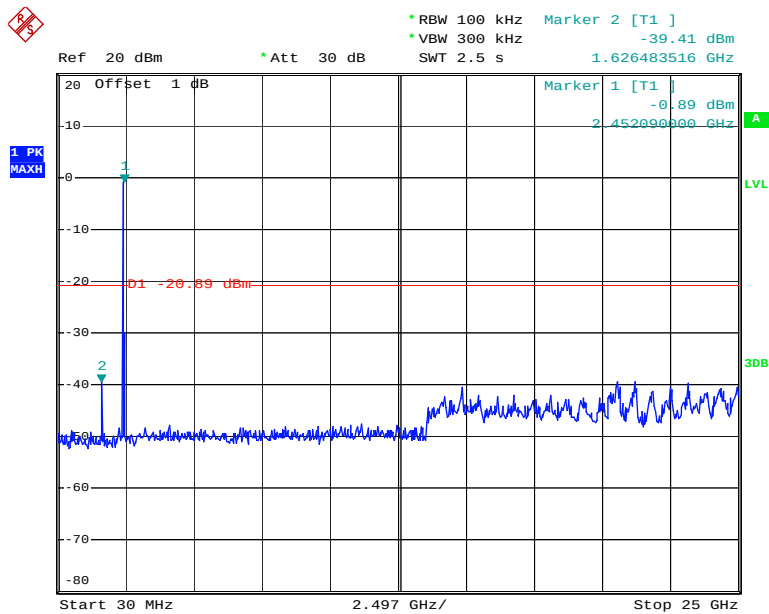


Date: 30.APR.2014 14:19:35

Chain 0: 802.11n ht40 Low Channel

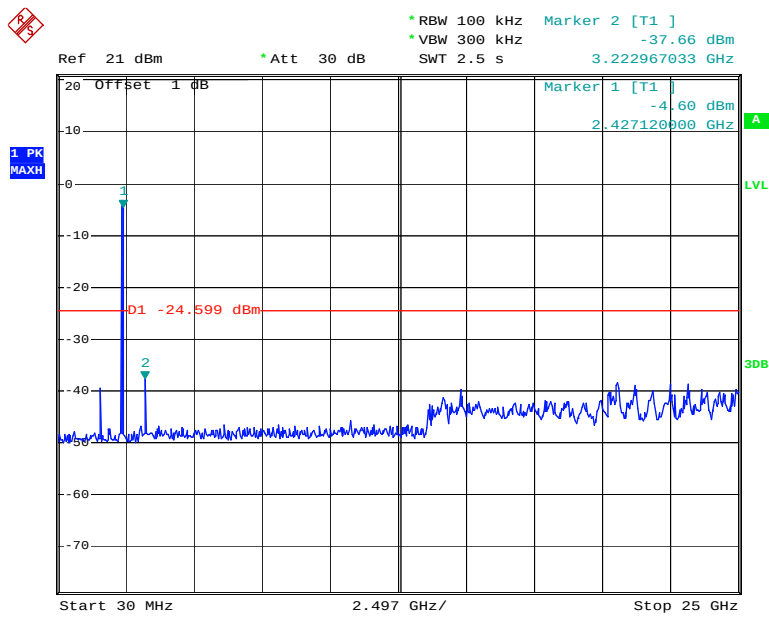


Date: 6.MAY.2014 10:17:52

Chain 0: 802.11n ht40 Middle Channel

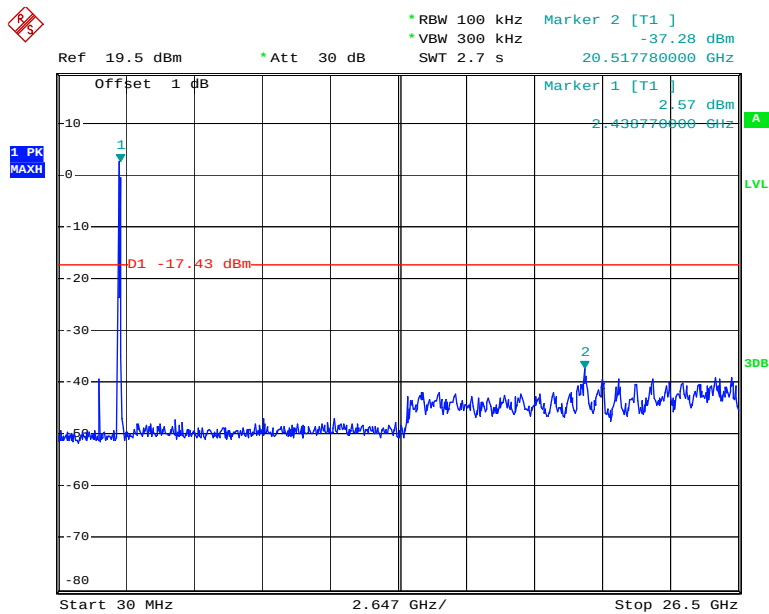


Date: 12.MAY.2014 17:33:40

Chain 0: 802.11n ht40 High Channel

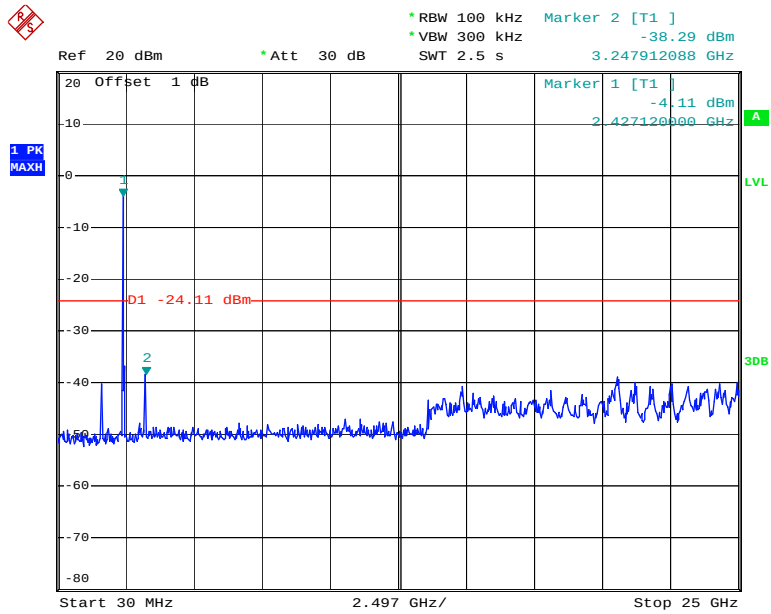


Date: 6.MAY.2014 10:30:28

Chain 1: 802.11n ht40 Low Channel

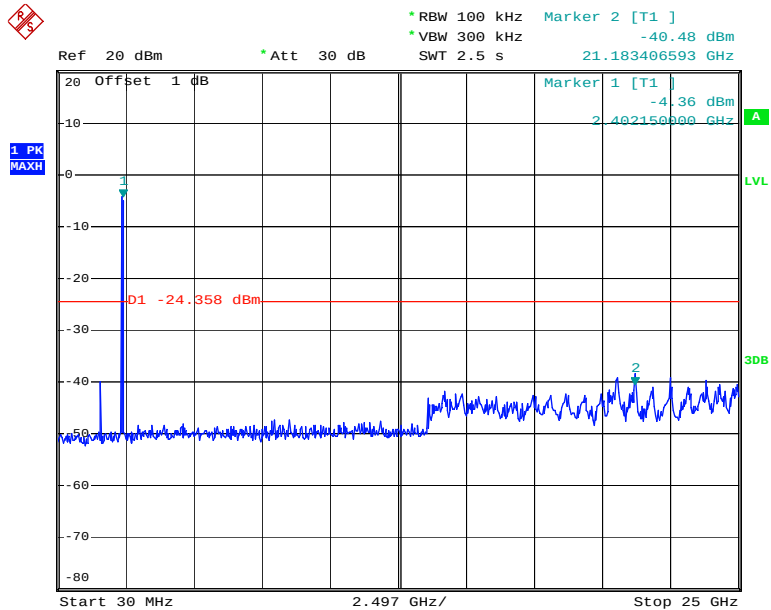


Date: 6.MAY.2014 10:21:31

Chain 1: 802.11n ht40 Middle Channel

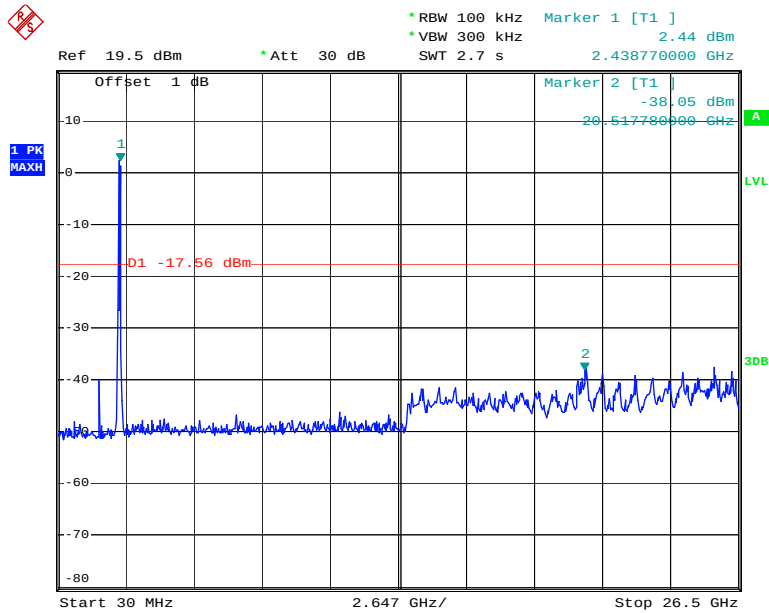

Date: 12.MAY.2014 17:34:37


Chain 1: 802.11n ht40 High Channel

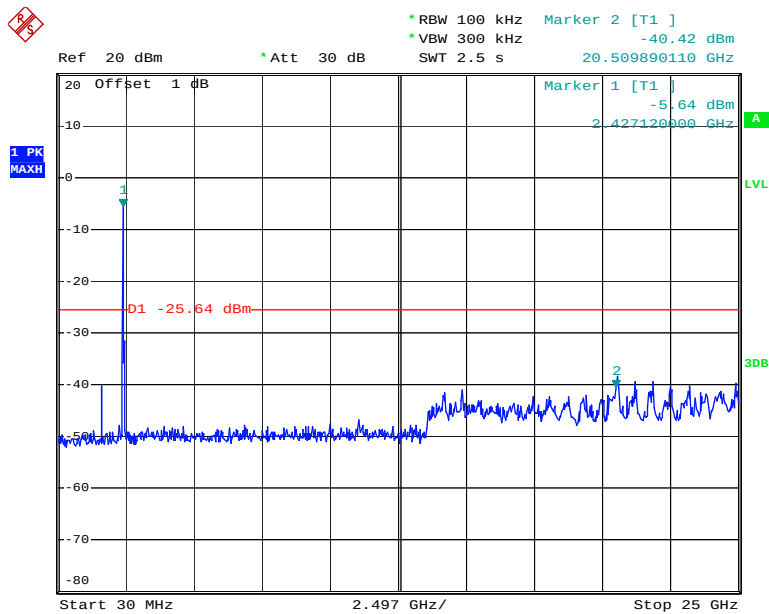

Date: 6.MAY.2014 10:32:28


5725-5850MHz band:

Chain0: 802.11a Low Channel 30MHz-26.5GHz

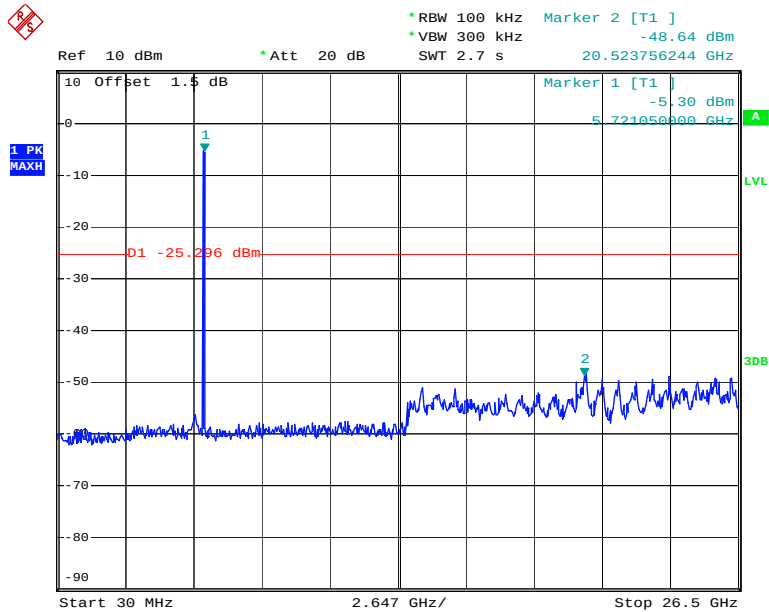


Date: 7.MAY.2014 10:46:29

Chain0: 802.11a Low Channel 26.5GHz-40GHz

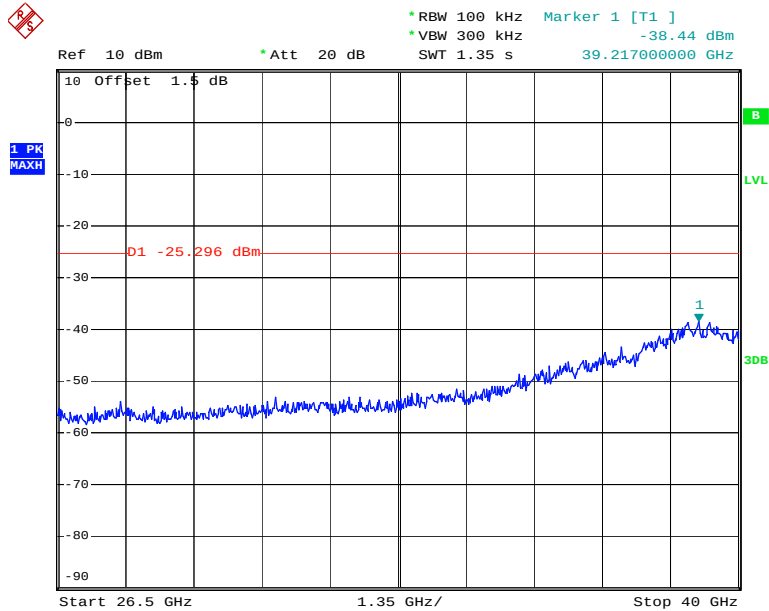


Date: 7.MAY.2014 10:47:00

Chain0: 802.11a Middle Channel 30MHz-26.5GHz

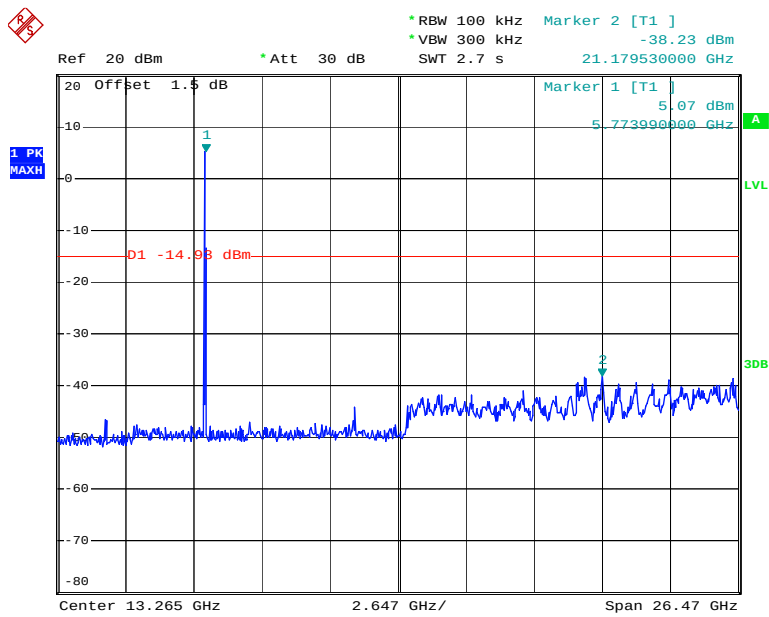


Date: 12.MAY.2014 17:42:16

Chain0: 802.11a Middle Channel 26.5GHz-40GHz

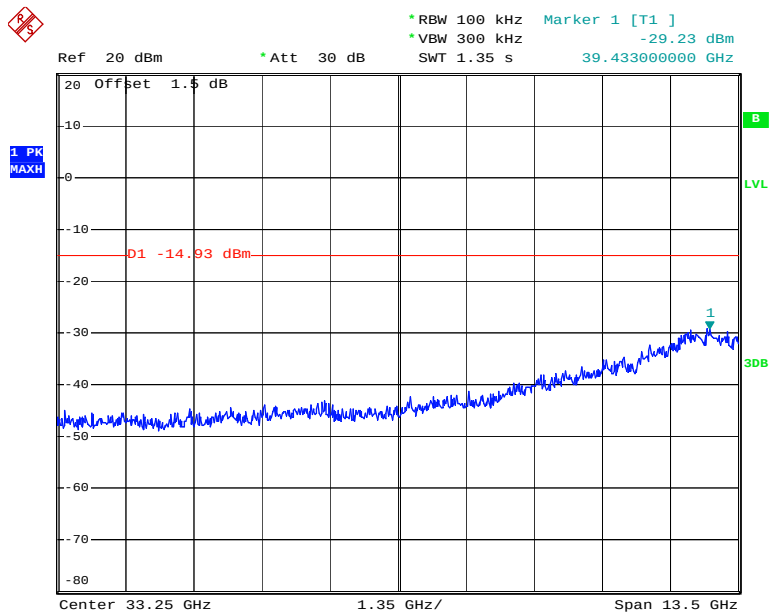


Date: 12.MAY.2014 17:42:31

Chain0: 802.11a High Channel 30MHz-26.5GHz

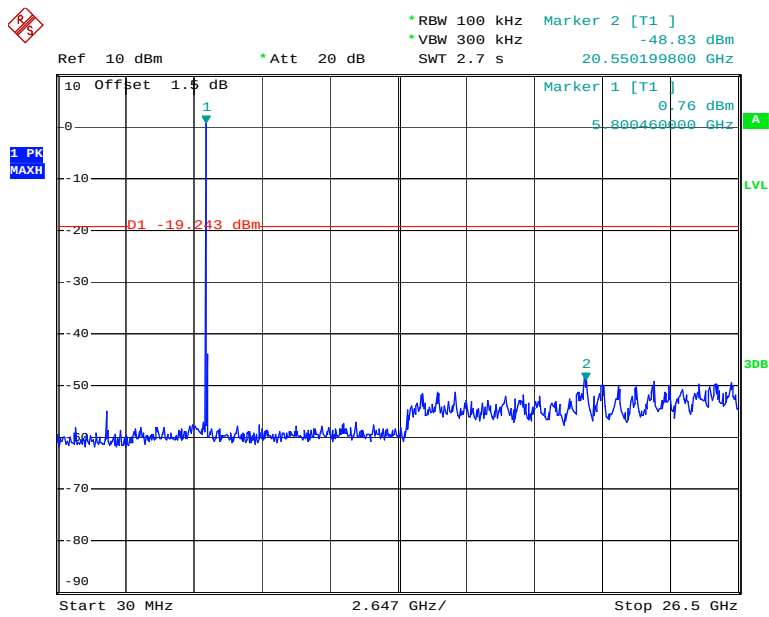


Date: 7.MAY.2014 10:51:58

Chain0: 802.11a High Channel 26.5GHz-40GHz

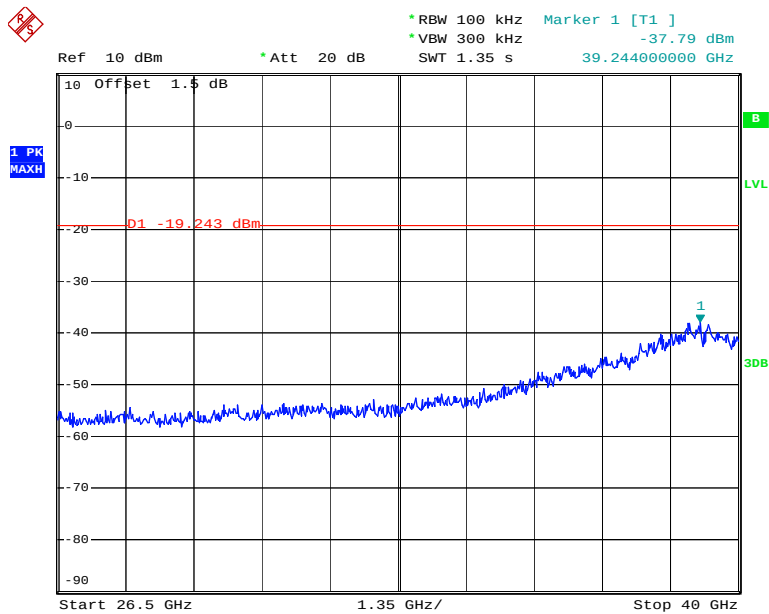


Date: 7.MAY.2014 10:52:31

Chain1: 802.11a Low Channel 30MHz-26.5GHz

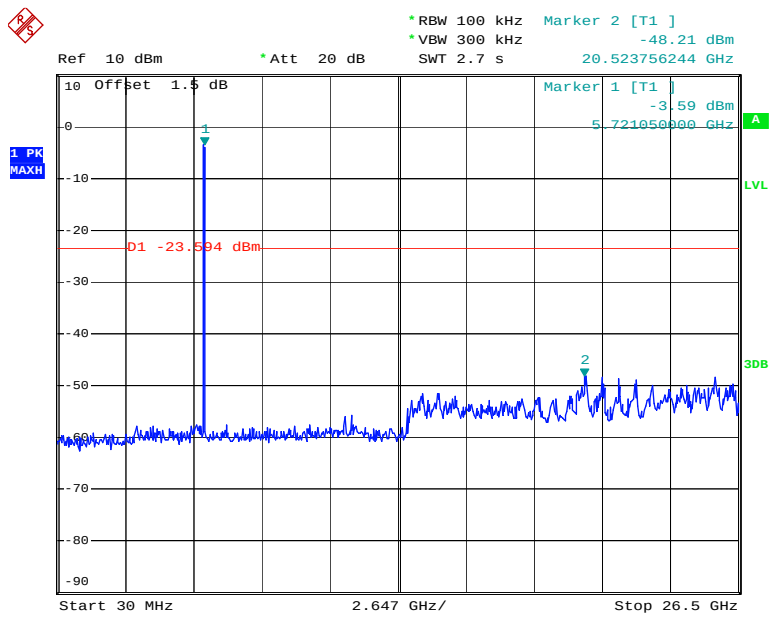


Date: 9.MAY.2014 16:33:24

Chain1: 802.11a Low Channel 26.5GHz-40GHz

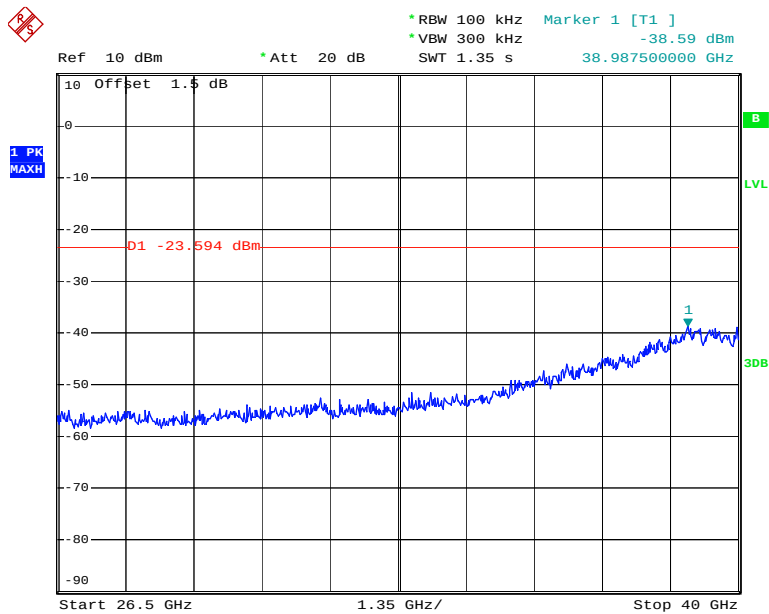


Date: 9.MAY.2014 16:33:50

Chain1: 802.11a Middle Channel 30MHz-26.5GHz

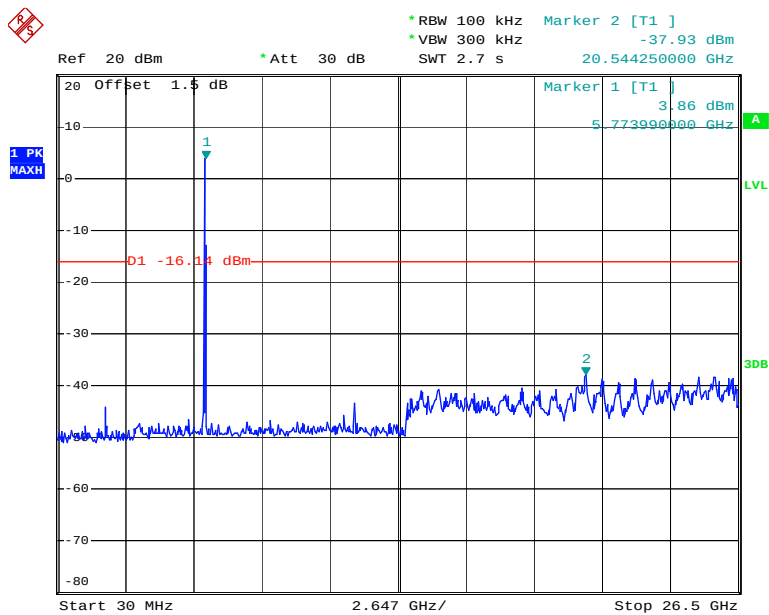


Date: 12.MAY.2014 17:41:05

Chain1: 802.11a Middle Channel 26.5GHz-40GHz

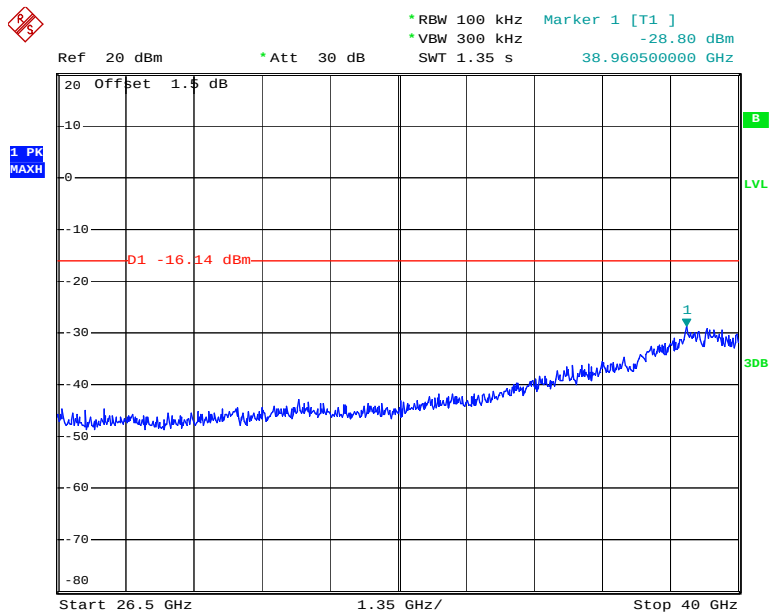


Date: 12.MAY.2014 17:41:43

Chain1: 802.11a High Channel 30MHz-26.5GHz

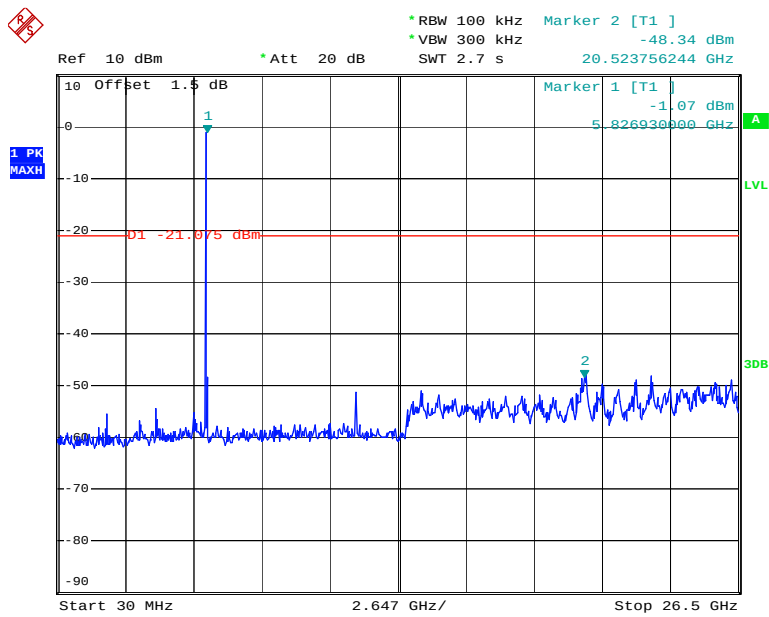


Date: 9.MAY.2014 16:28:05

Chain1: 802.11a High Channel 26.5GHz-40GHz

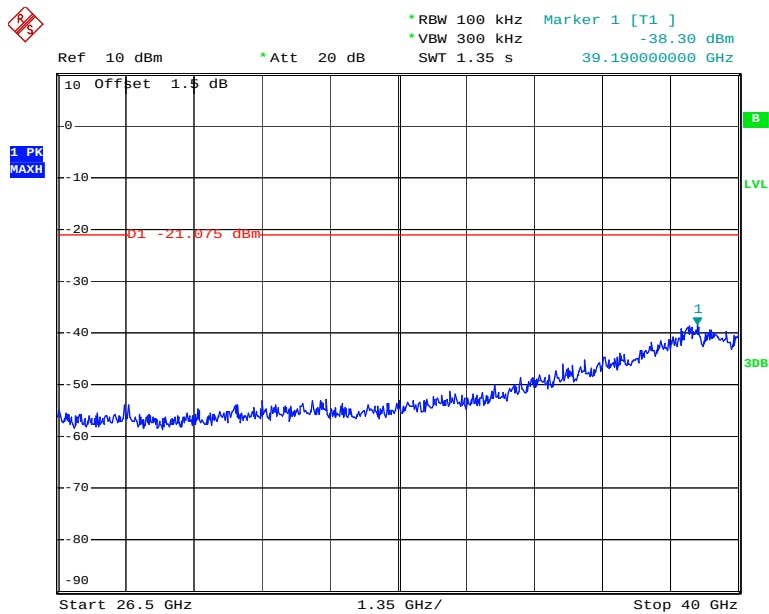


Date: 9.MAY.2014 16:28:32

Chain 0: 802.11n ht20 Low Channel 30MHz-26.5GHz

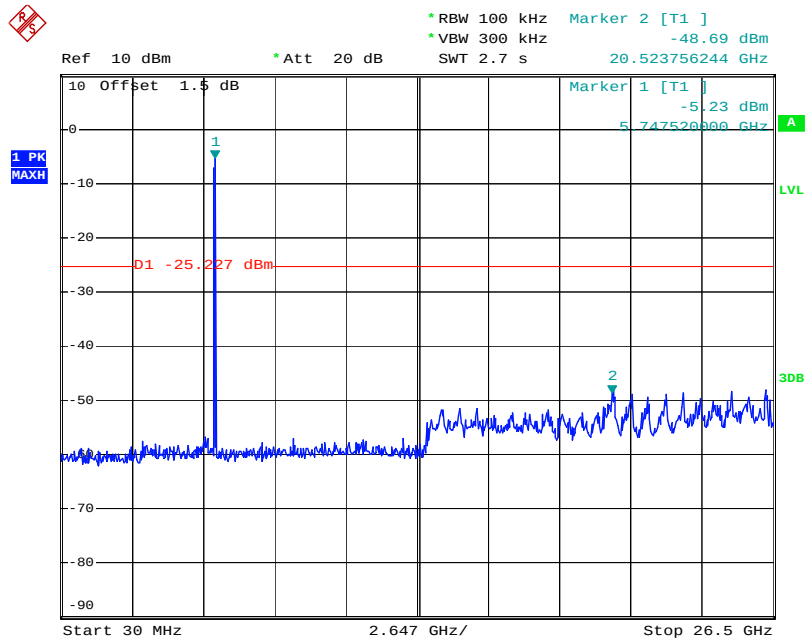


Date: 7.MAY.2014 10:58:13

Chain 0: 802.11n ht20 Low Channel 26.5GHz-40GHz

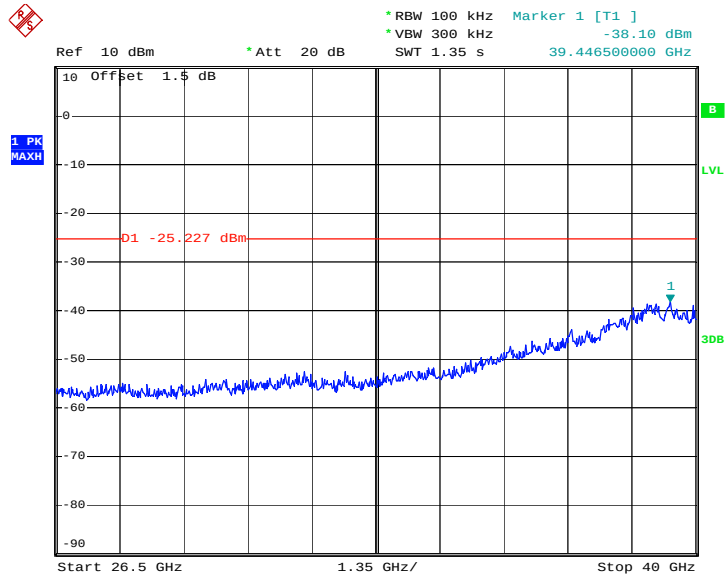


Date: 7.MAY.2014 10:59:21

Chain 0: 802.11n ht20 Middle Channel 30MHz-26.5GHz

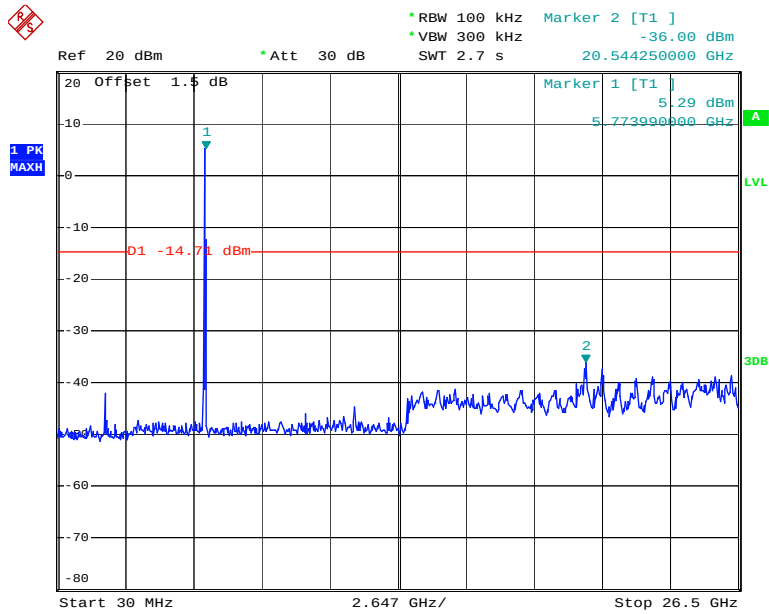


Date: 12.MAY.2014 17:45:36

Chain 0: 802.11n ht20 Middle Channel 26.5GHz-40GHz

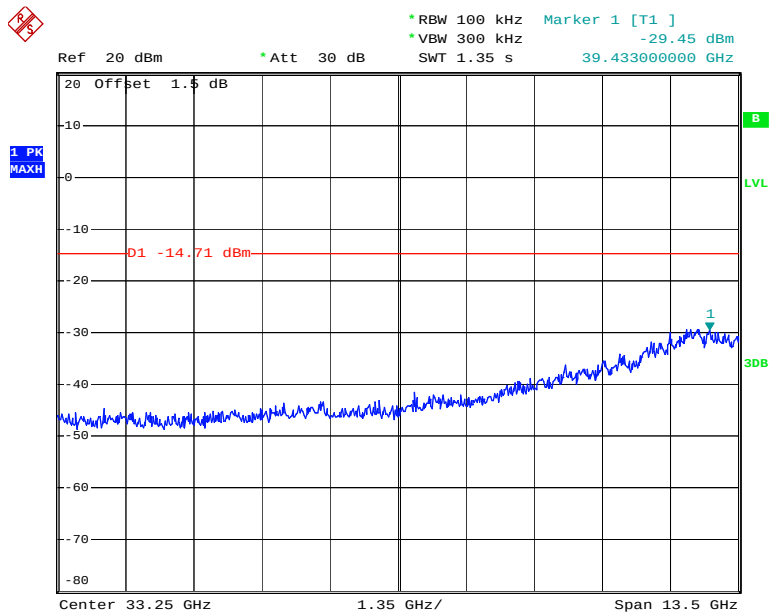


Date: 12.MAY.2014 17:45:57

Chain 0: 802.11n ht20 High Channel 30MHz-26.5GHz

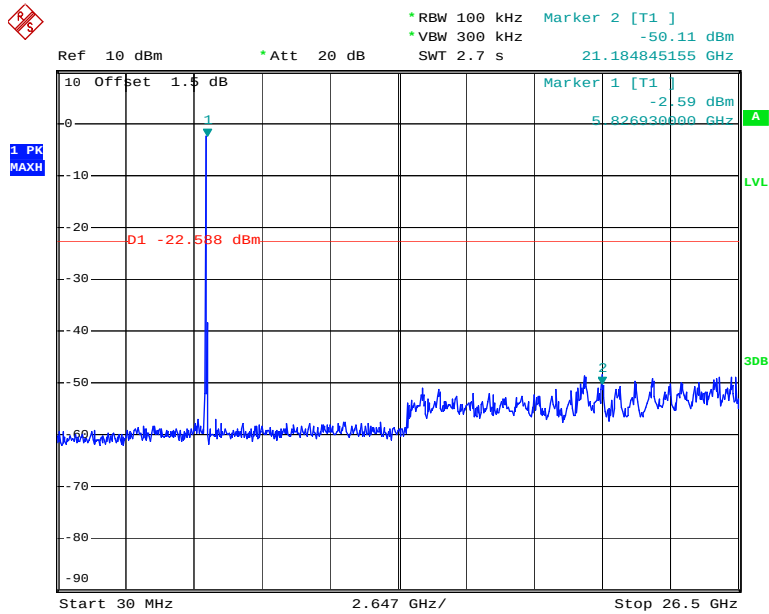


Date: 7.MAY.2014 11:09:15

Chain 0: 802.11n ht20 High Channel 26.5GHz-40GHz

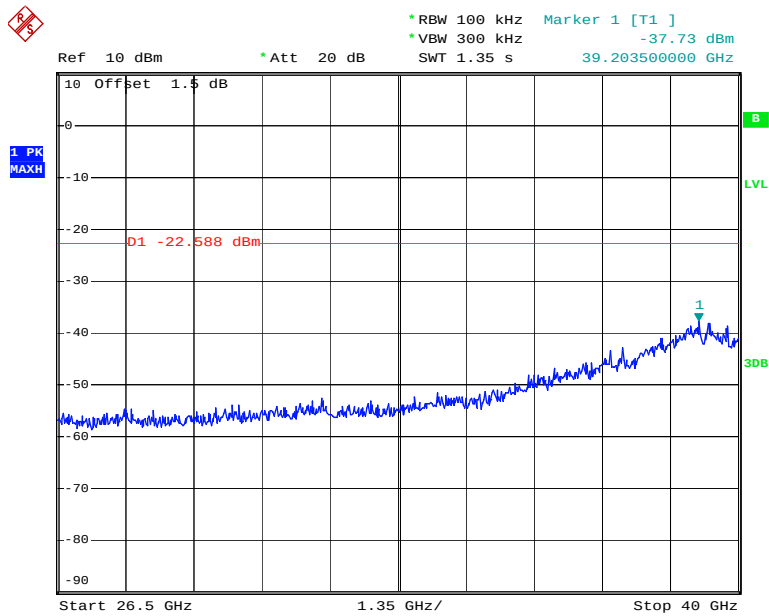


Date: 7.MAY.2014 11:09:33

Chain 1: 802.11n ht20 Low Channel 30MHz-26.5GHz

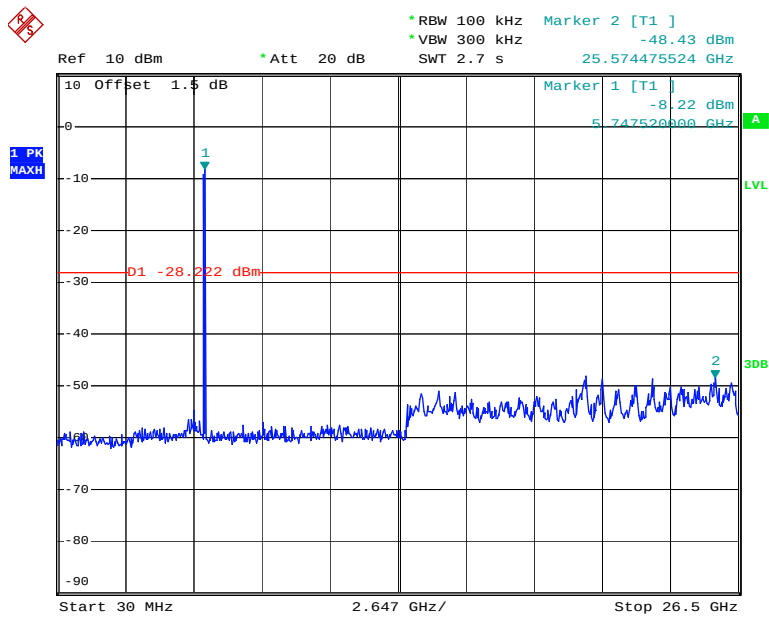


Date: 7.MAY.2014 10:55:50

Chain 1: 802.11n ht20 Low Channel 26.5GHz-40GHz

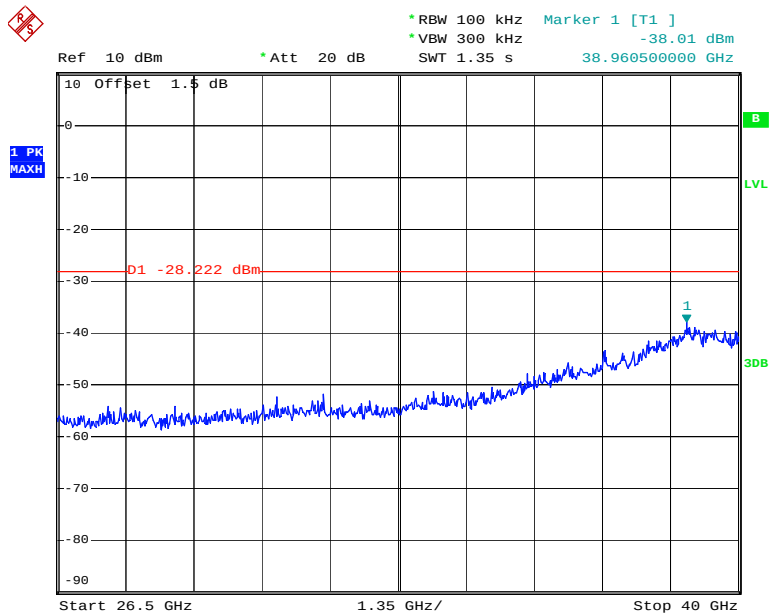


Date: 7.MAY.2014 10:56:09

Chain 1: 802.11n ht20 Middle Channel 30MHz-26.5GHz

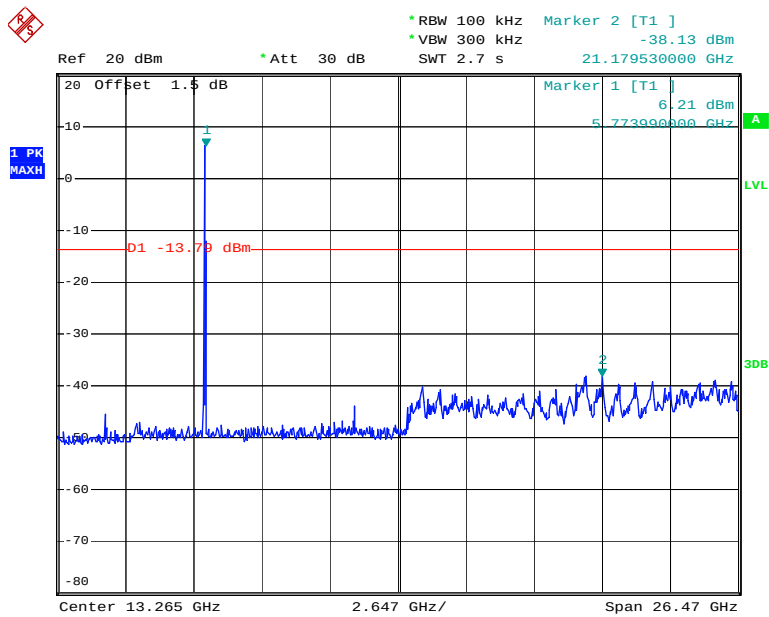


Date: 12.MAY.2014 17:44:07

Chain 1: 802.11n ht20 Middle Channel 26.5GHz-40GHz

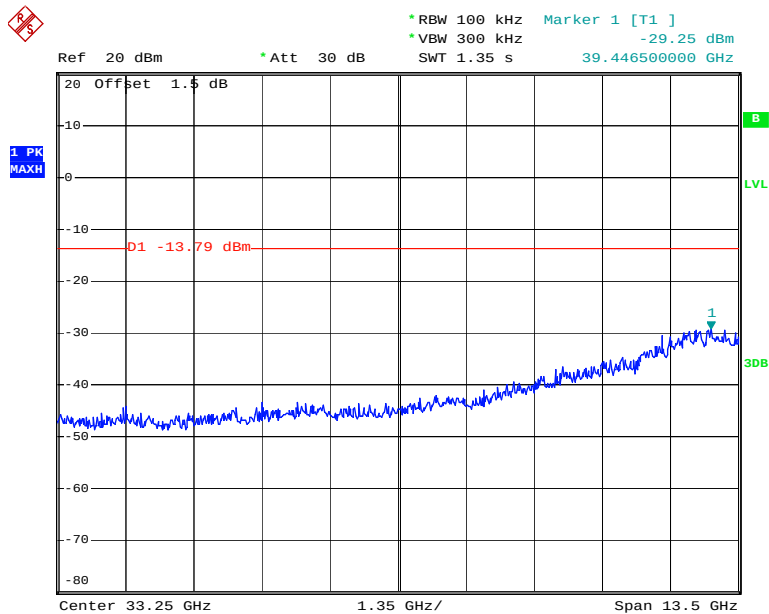


Date: 12.MAY.2014 17:44:25

Chain 1: 802.11n ht20 High Channel 30MHz-26.5GHz

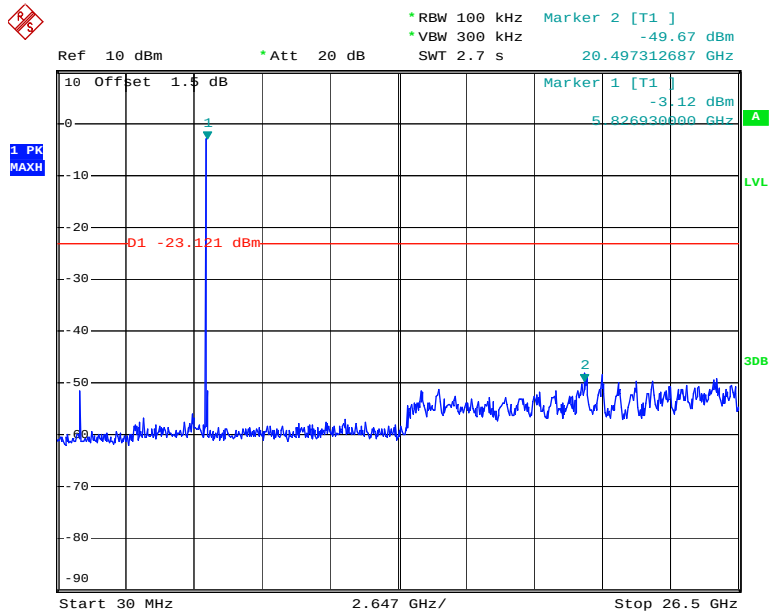


Date: 7.MAY.2014 11:07:03


Chain 1: 802.11n ht20 High Channel 26.5GHz-40GHz

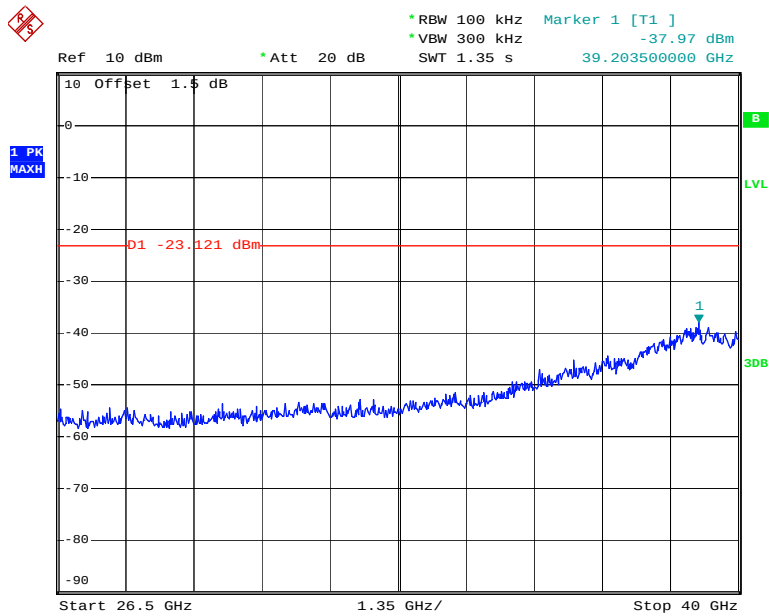

Date: 7.MAY.2014 11:07:23

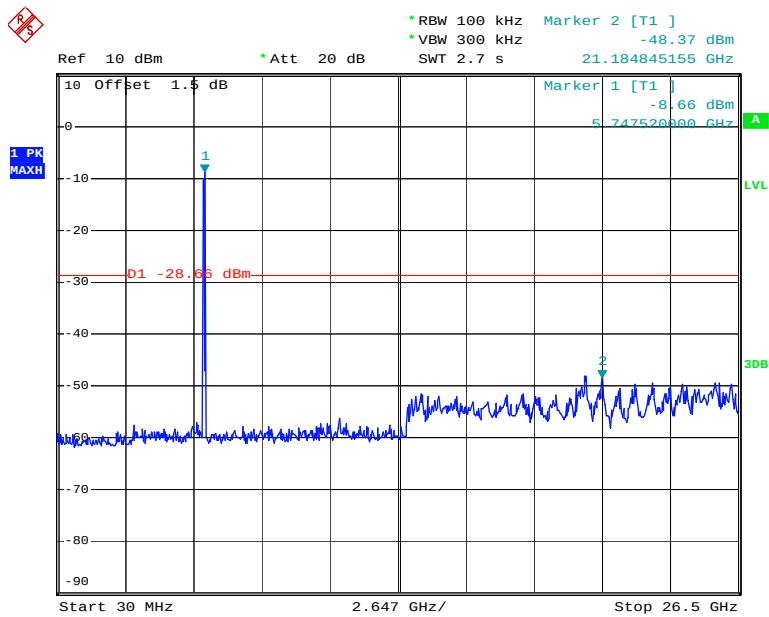
Chain 0: 802.11n ht40 Low Channel 30MHz-26.5GHz

Date: 7.MAY.2014 11:12:34

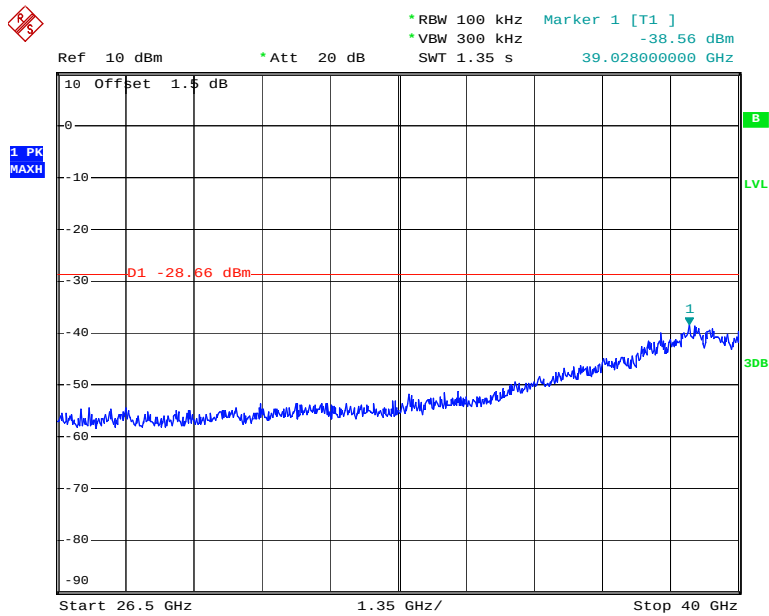Chain 0: 802.11n ht40 Low Channel 26.5GHz-40GHz


Date: 7.MAY.2014 11:12:58

Chain 0: 802.11n ht40 High Channel 30MHz-26.5GHz

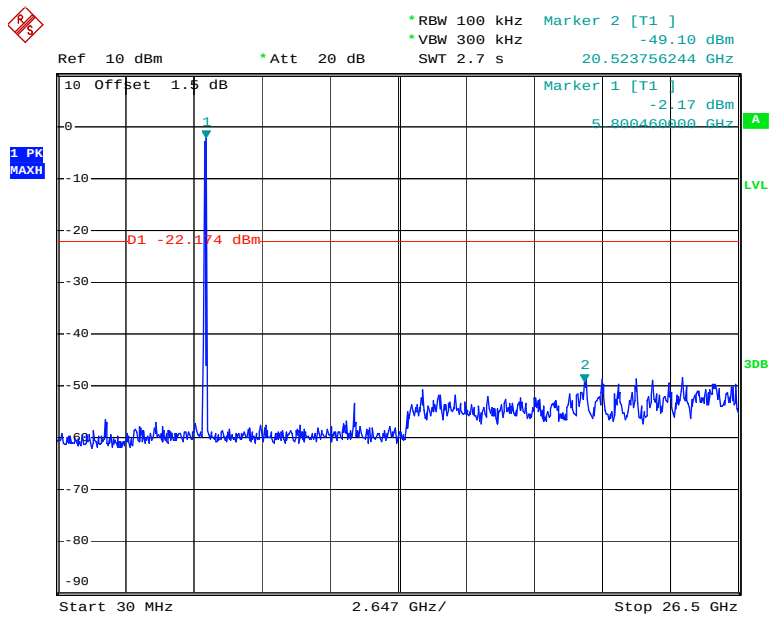


Date: 13.MAY.2014 16:51:08

Chain 0: 802.11n ht40 High Channel 26.5GHz-40GHz

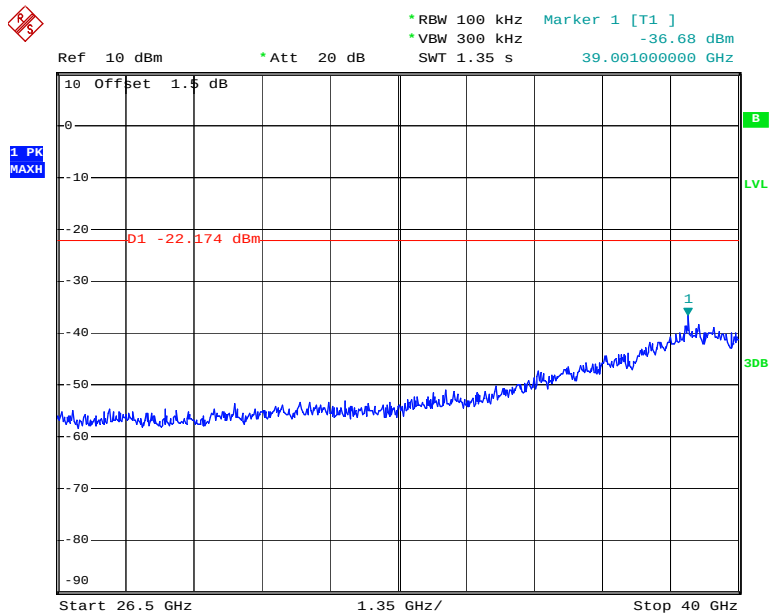


Date: 13.MAY.2014 16:51:29

Chain 1: 802.11n ht40 Low Channel 30MHz-26.5GHz

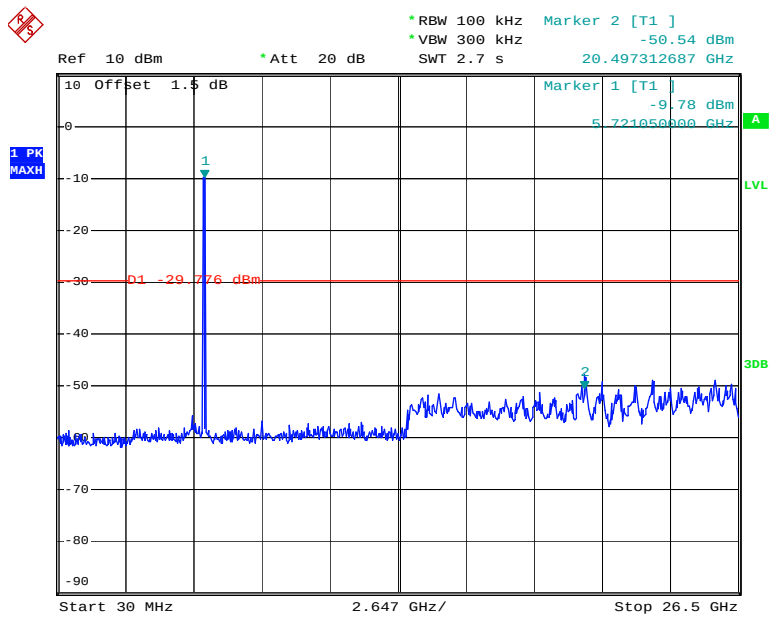


Date: 7.MAY.2014 11:15:28

Chain 1: 802.11n ht40 Low Channel 26.5GHz-40GHz

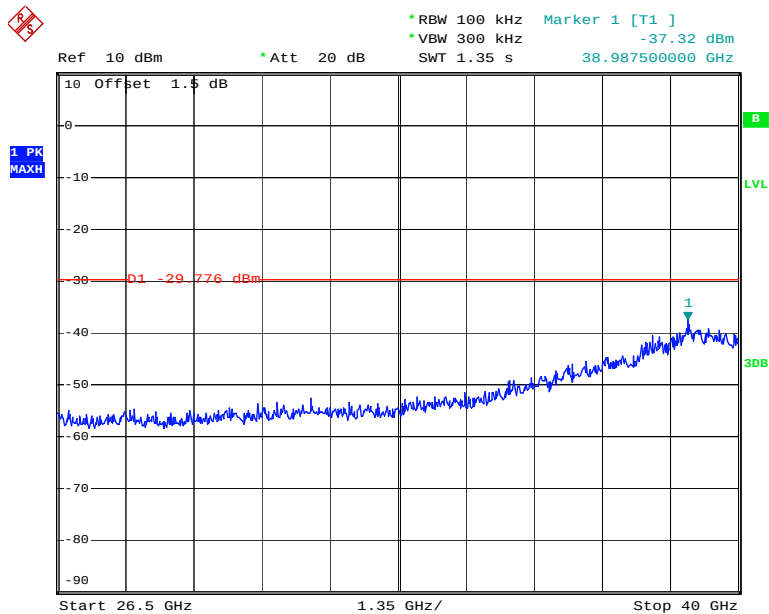


Date: 7.MAY.2014 11:15:46

Chain 1: 802.11n ht40 High Channel 30MHz-26.5GHz

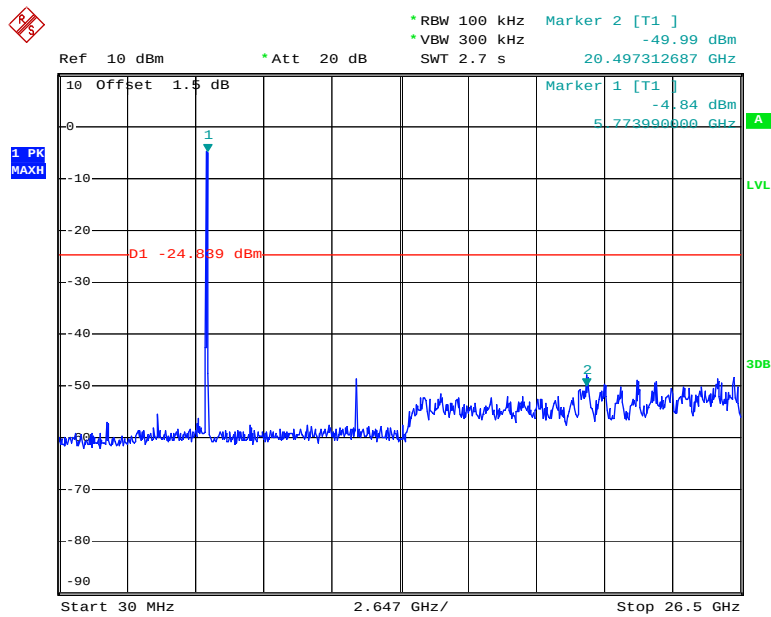

Date: 13.MAY.2014 16:48:49

Chain 1: 802.11n ht40 High Channel 26.5GHz-40GHz

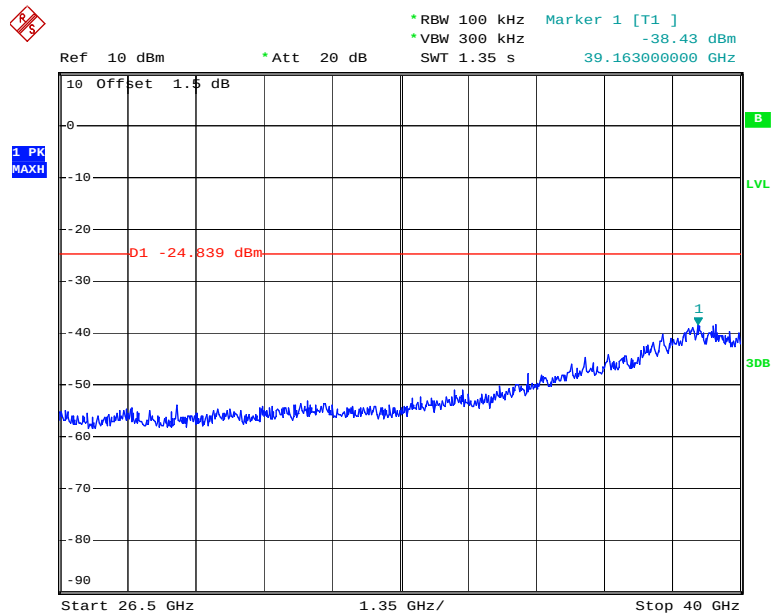

Date: 13.MAY.2014 16:49:14

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r01clause8.1 Option 1:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.2~26.5 °C
Relative Humidity:	61~68 %
ATM Pressure:	100~100.9 kPa

The testing was performed by Dean Liu from 2014-04-30 to 2014-05-13.

Test Result: Pass.


Please refer to the following tables and plots.

2.4GHz band:

Test mode	Channel	Frequency	6 dB Bandwidth (MHz)		Limit
		(MHz)	Chain0	Chain1	(kHz)
2.4GHz band- 802.11b	Low	2412	10.19	10.09	≥500
	Middle	2437	10.09	10.14	≥500
	High	2462	10.09	10.14	≥500
2.4GHz band- 802.11g	Low	2412	16.43	16.43	≥500
	Middle	2437	16.43	16.43	≥500
	High	2462	16.43	16.43	≥500
2.4GHz band- 802.11n ht20	Low	2412	17.68	17.73	≥500
	Middle	2437	17.68	17.33	≥500
	High	2462	17.78	17.68	≥500
2.4GHz band- 802.11n ht40	Low	2422	36.26	35.96	≥500
	Middle	2437	35.66	36.16	≥500
	High	2452	36.16	36.56	≥500
5725- 5850MHz band-802.11a	Low	5745	16.13	16.33	≥500
	Middle	5785	16.38	15.93	≥500
	High	5825	16.13	16.33	≥500
5725- 5850MHz band- 802.11n ht20	Low	5745	17.63	17.68	≥500
	Middle	5785	15.98	16.38	≥500
	High	5825	17.63	17.63	≥500
5725- 5850MHz band- 802.11n ht40	Low	5755	35.66	35.76	≥500
	High	5795	35.56	35.66	≥500


2.4GHz band:

Chain 0: 802.11b Low Channel

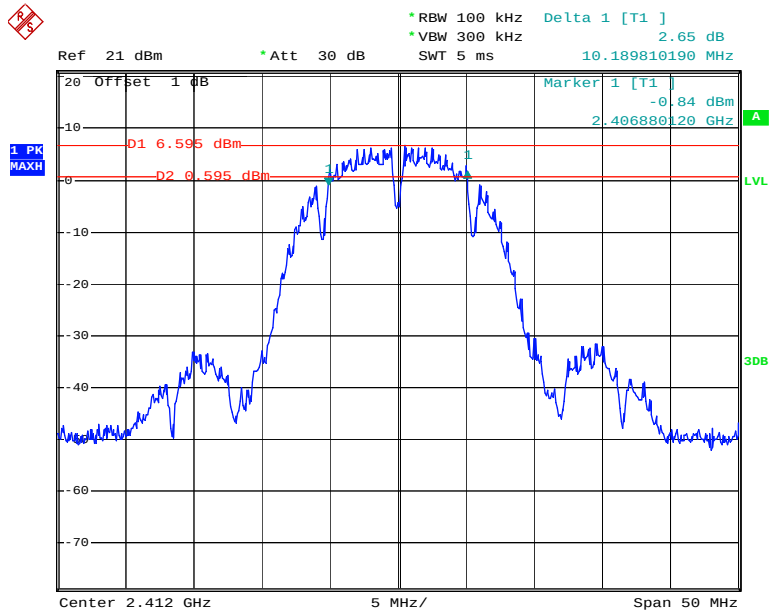

Date: 30.APR.2014 13:27:14

Chain 0: 802.11b Middle Channel

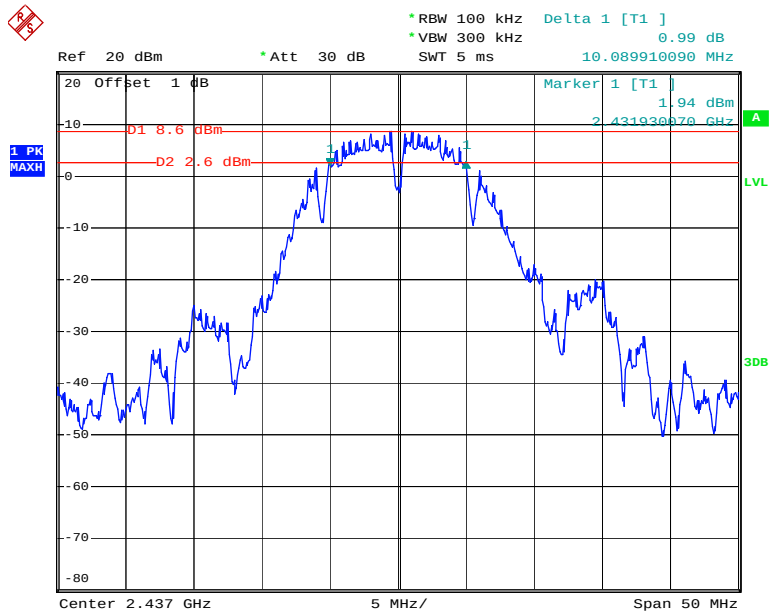

Date: 12.MAY.2014 15:30:05

Ref 20 dBm *Att 30 dB *RBW 100 kHz Delta 1 [T1] 0.67 dB
 *VBW 300 kHz SWT 5 ms 10.089910090 MHz


20 Offset 1 dB Marker 1 [T1] 0.28 dBm
 2.456930070 GHz

1 PK MAXH

D1 6.791 dBm
 D2 0.791 dBm


Center 2.462 GHz 5 MHz/ Span 50 MHz

Chain 1: 802.11b Low Channel

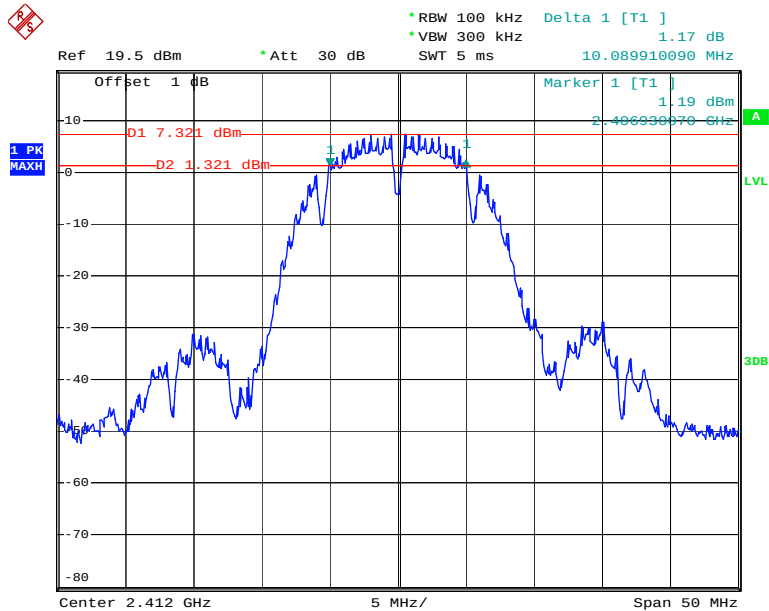


Page 61 of 158

Chain 1: 802.11b Middle Channel

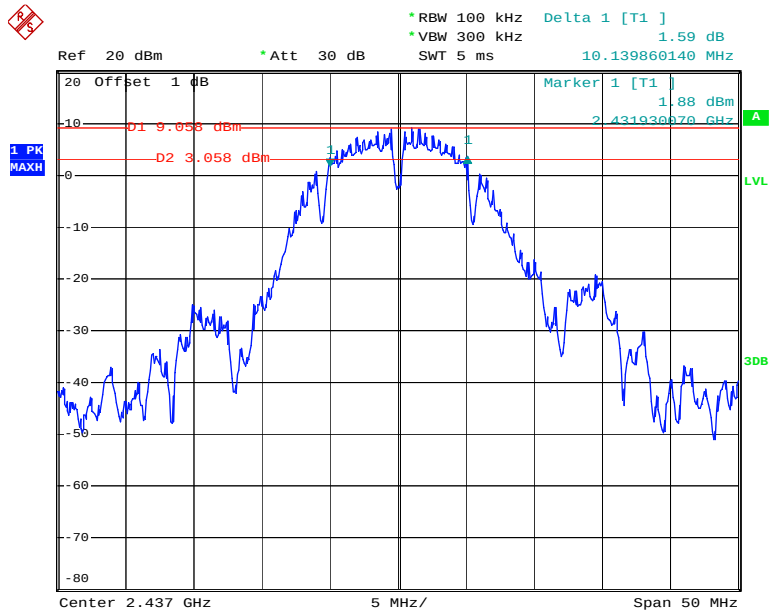


Date: 12.MAY.2014 15:26:21

Chain 1: 802.11b High Channel

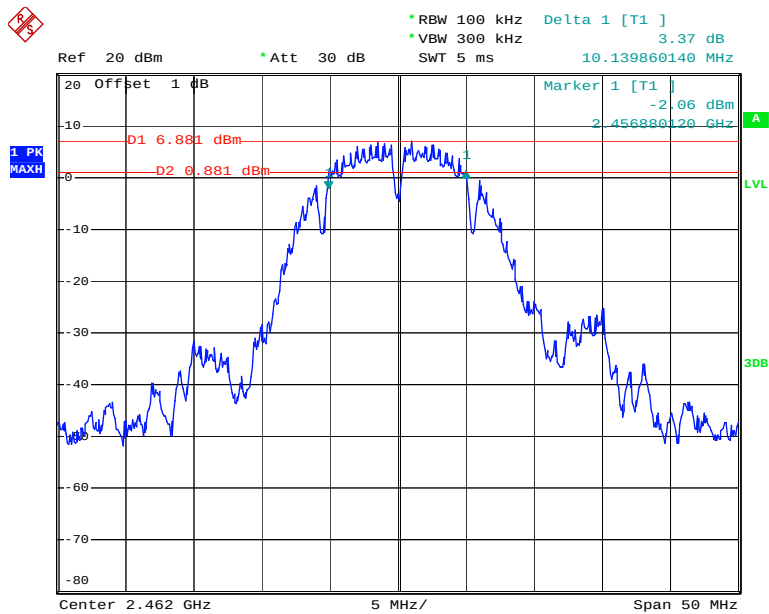


Date: 9.MAY.2014 16:40:57

Chain 0: 802.11g Low Channel

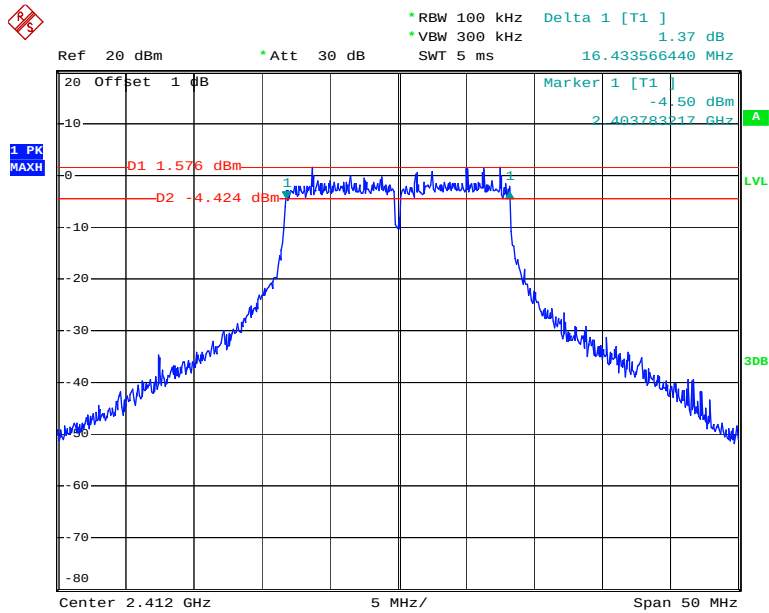


Date: 30.APR.2014 13:35:04

Chain 0: 802.11g Middle Channel

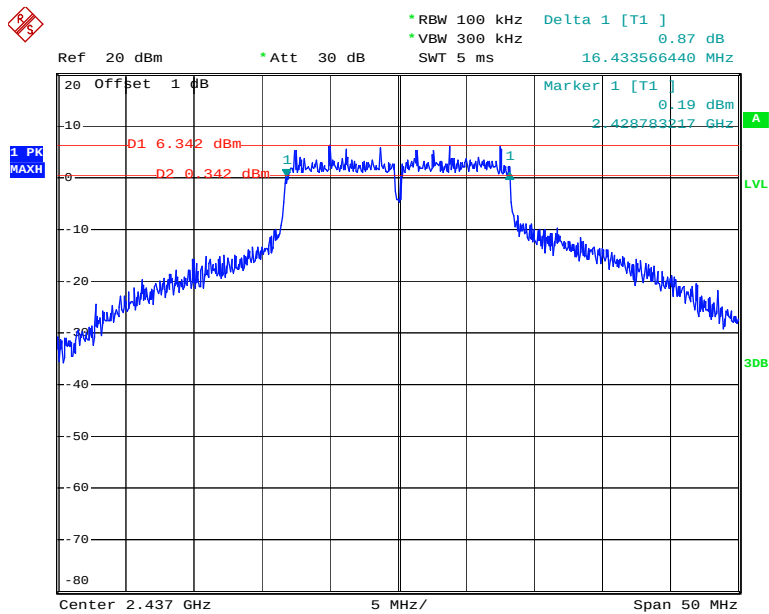


Date: 12.MAY.2014 15:32:27

Chain 0: 802.11g High Channel

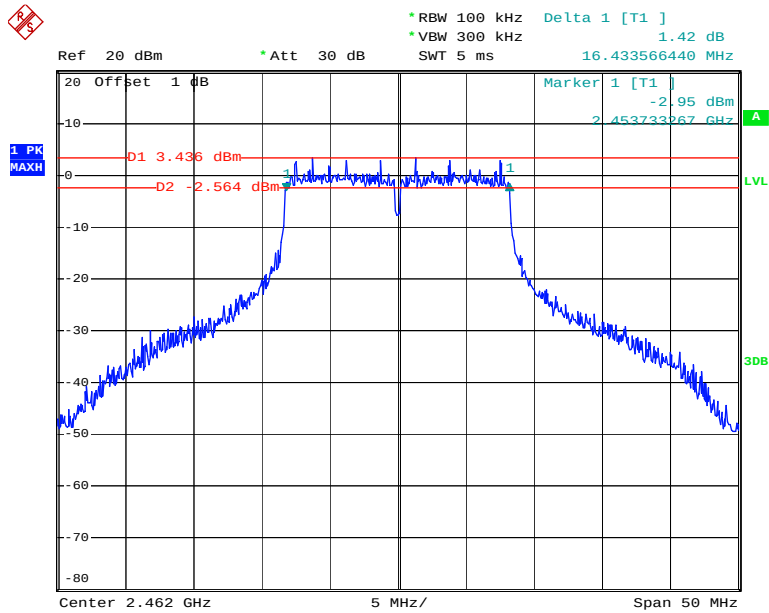


Date: 30.APR.2014 13:39:09

Chain 1: 802.11g Low Channel

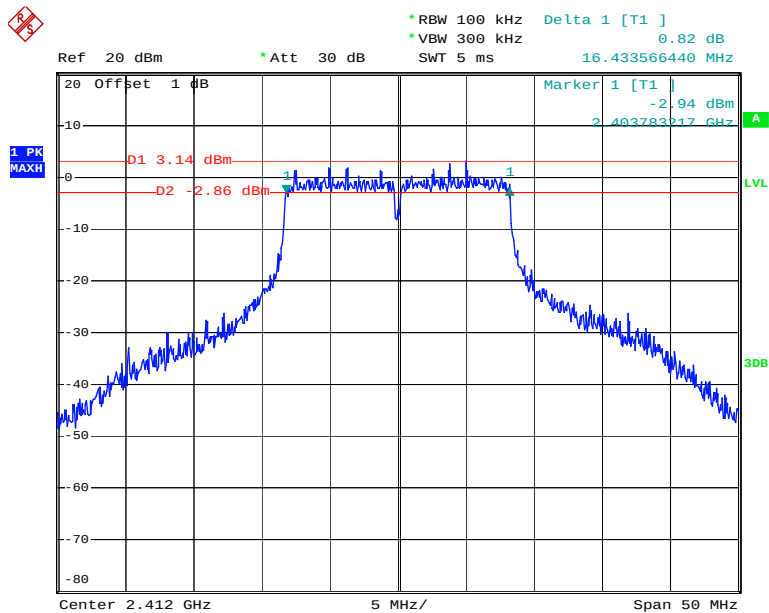


Date: 9.MAY.2014 16:46:38

Chain 1: 802.11g Middle Channel

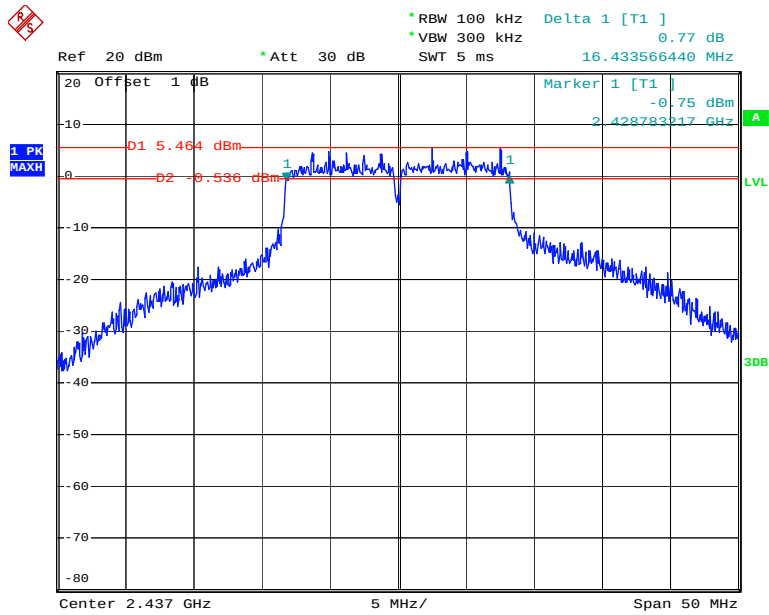

Date: 12.MAY.2014 15:35:53

Chain 1: 802.11g High Channel

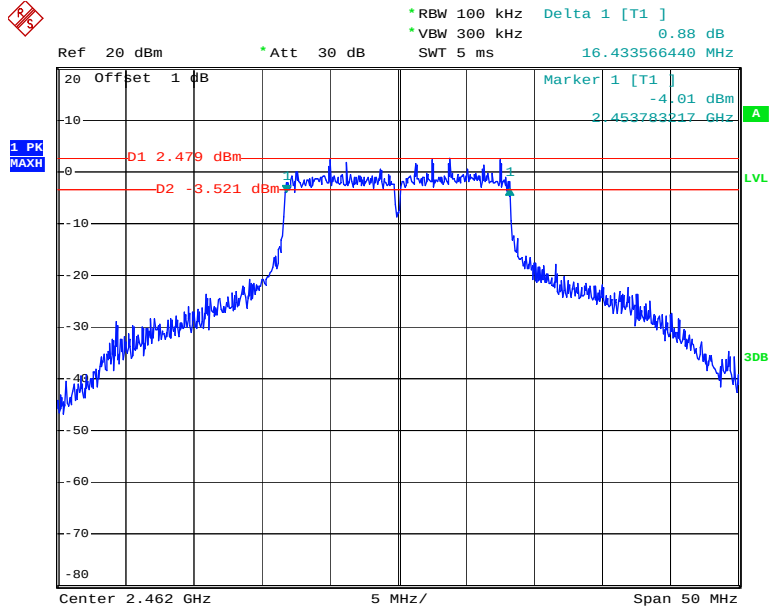

Date: 9.MAY.2014 16:43:14

Ref 20 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 5 ms Delta 1 [T1] 3.81 dB 17.682317690 MHz

20 Offset 1 dB


Marker 1 [T1] -7.20 dBm 2.403133866 GHz

1 PK MAXH

D1 0.16 dBm D2 -5.84 dBm


Center 2.412 GHz 5 MHz/ Span 50 MHz

Chain 0: 802.11n ht20 Middle Channel

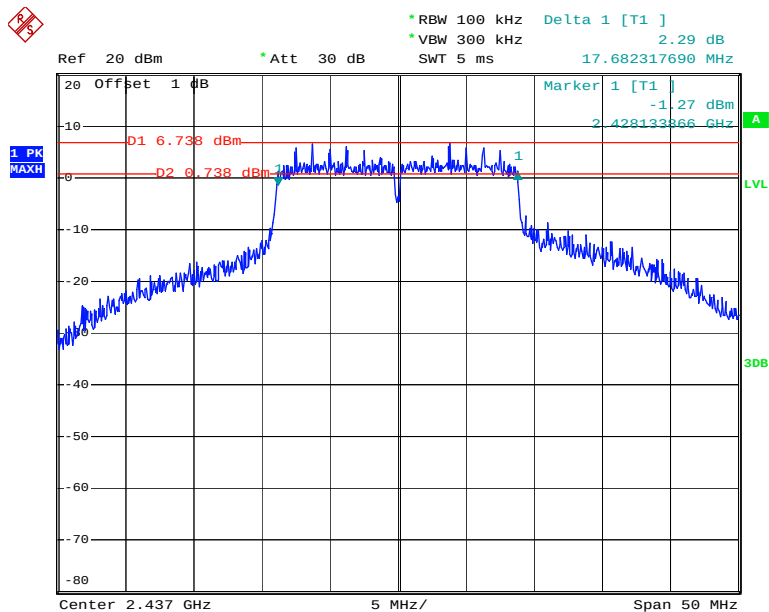


Page 66 of 158

Chain 0: 802.11n ht20 High Channel

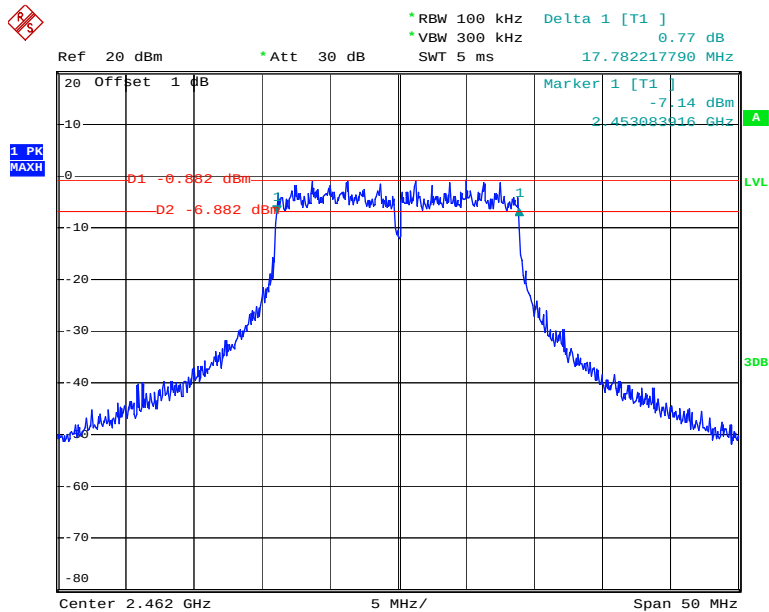


Date: 30.APR.2014 13:48:40

Chain 1: 802.11n ht20 Low Channel

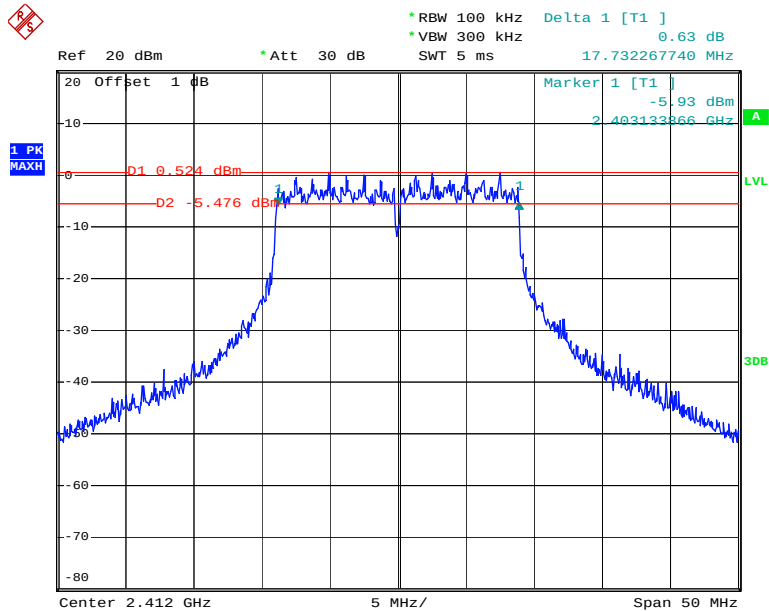


Date: 30.APR.2014 13:43:26

Chain 1: 802.11n ht20 Middle Channel

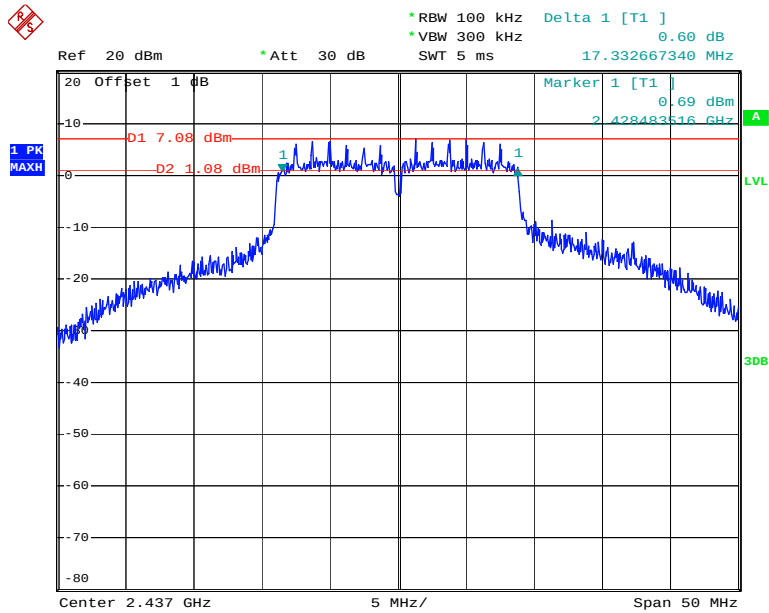


Date: 12.MAY.2014 16:04:50

Chain 1: 802.11n ht20 High Channel

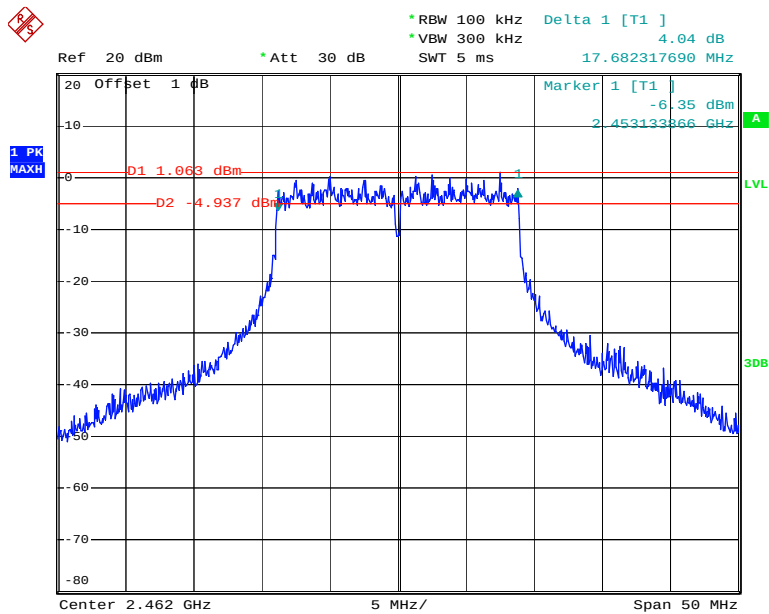


Date: 30.APR.2014 14:18:42

Chain 0: 802.11n ht40 Low Channel

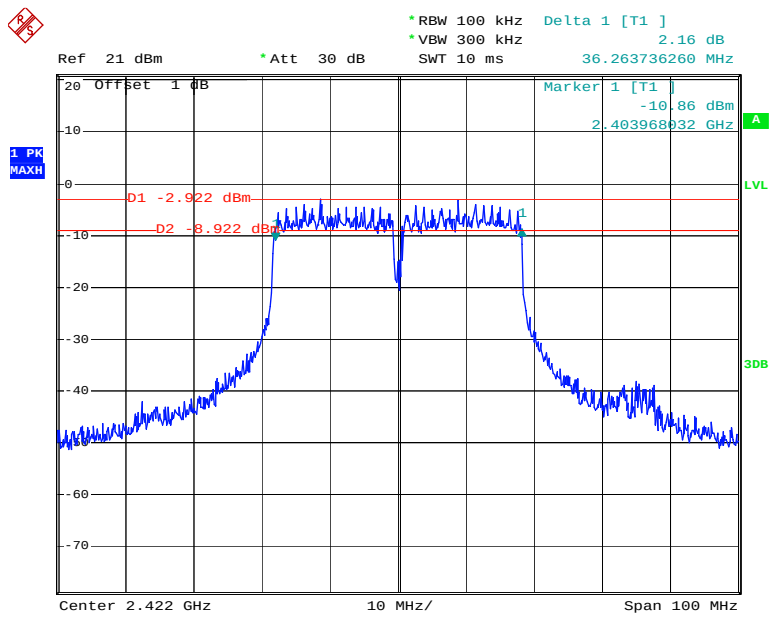


Date: 6.MAY.2014 10:15:56

Chain 0: 802.11n ht40 Middle Channel

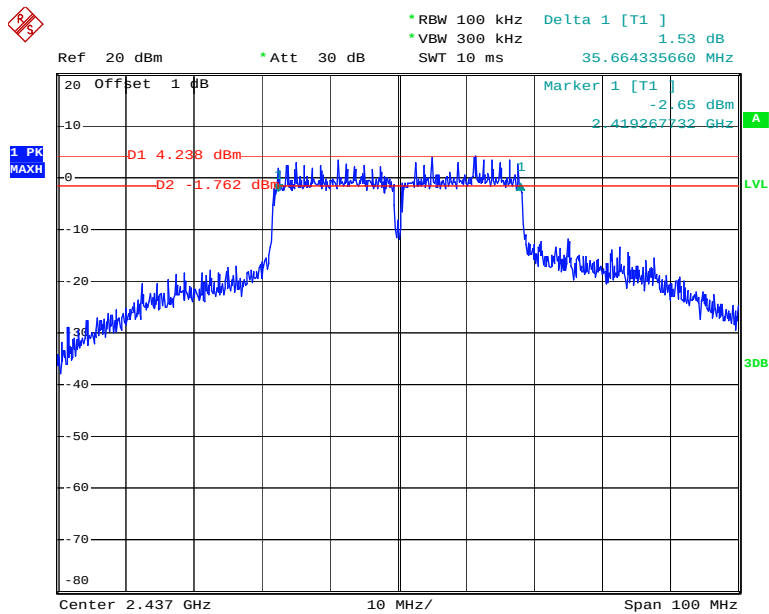


Date: 12.MAY.2014 16:09:06

Chain 0: 802.11n ht40 High Channel

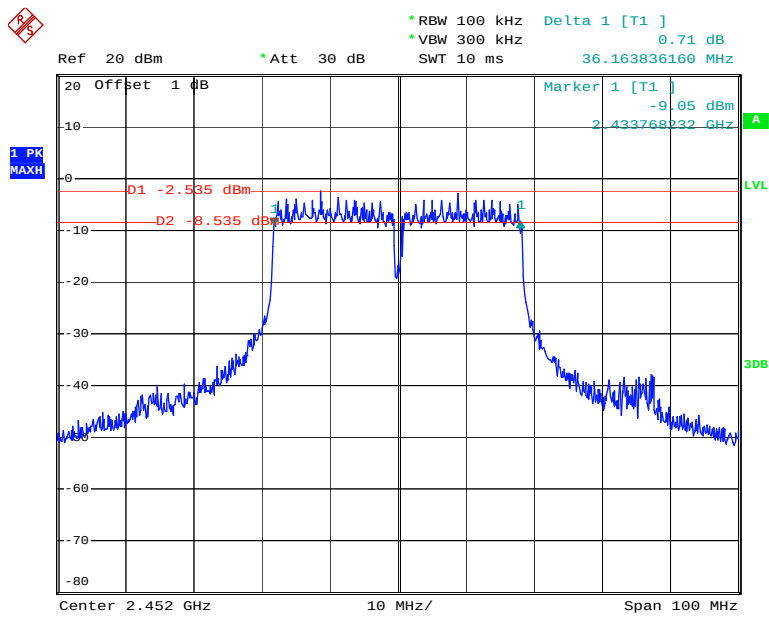


Date: 6.MAY.2014 10:29:12

Chain 1: 802.11n ht40 Low Channel

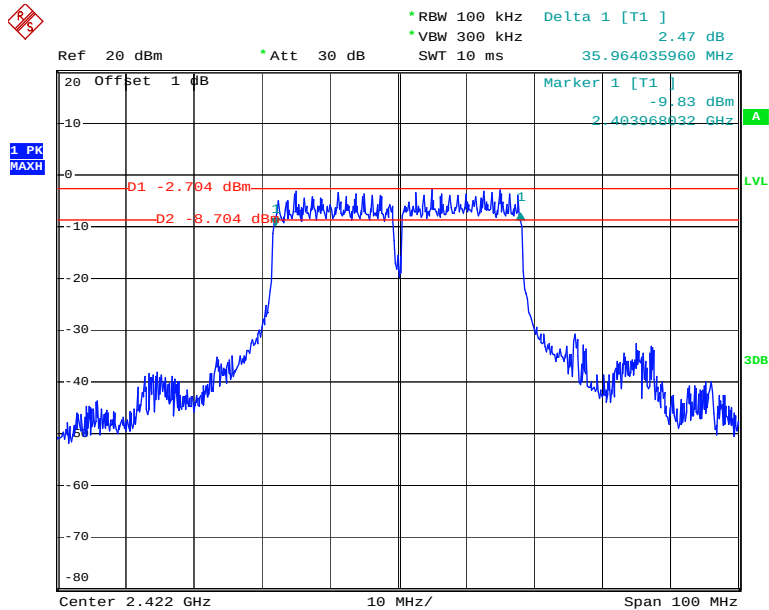


Date: 6.MAY.2014 10:20:06

Chain 1: 802.11n ht40 Middle Channel

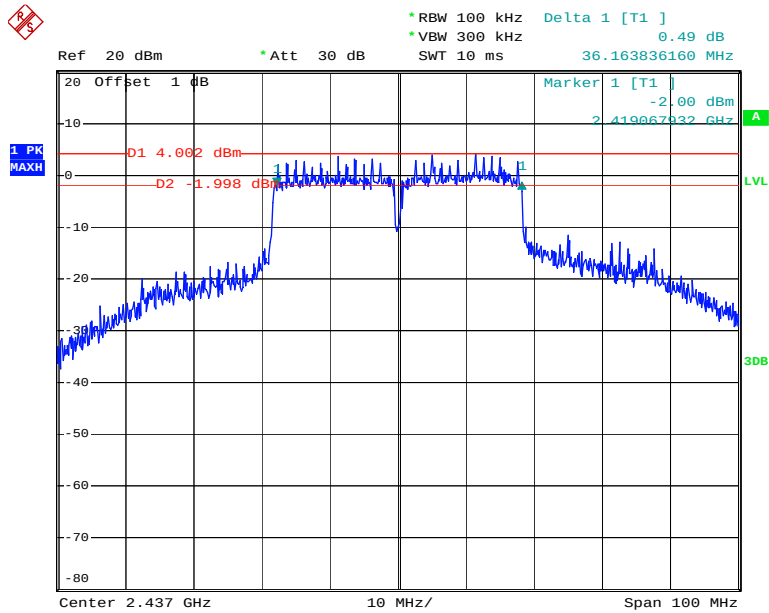

Date: 12.MAY.2014 16:07:51


Chain 1: 802.11n ht40 High Channel

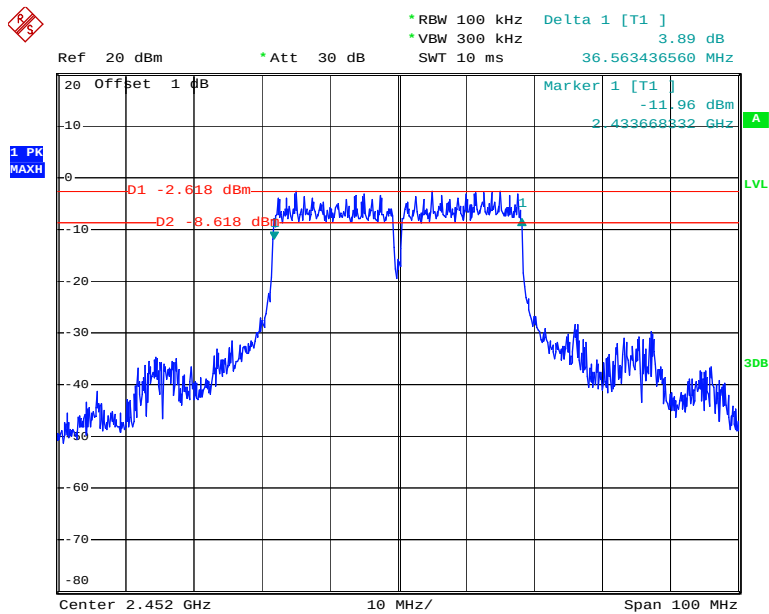

Date: 6.MAY.2014 10:31:12


5725-5850MHz band:

Chain 0: 802.11a Low Channel

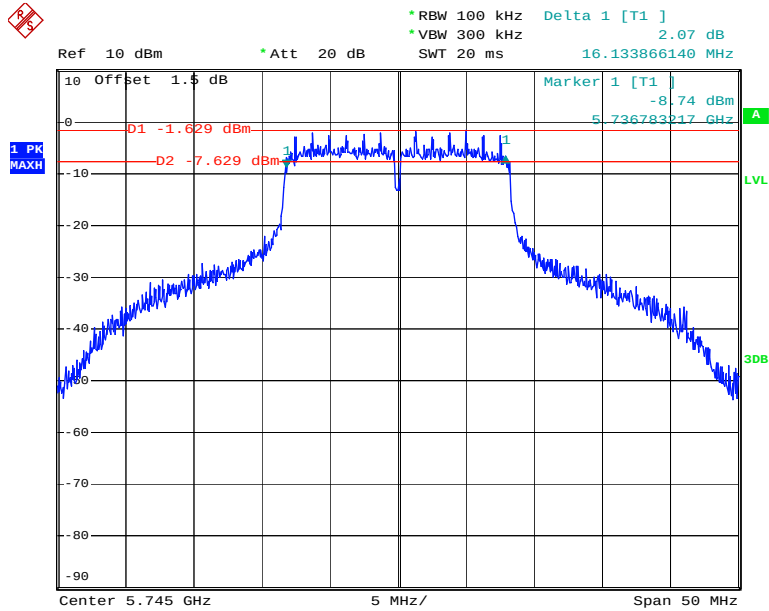


Date: 7.MAY.2014 10:45:31

Chain 0: 802.11a Middle Channel

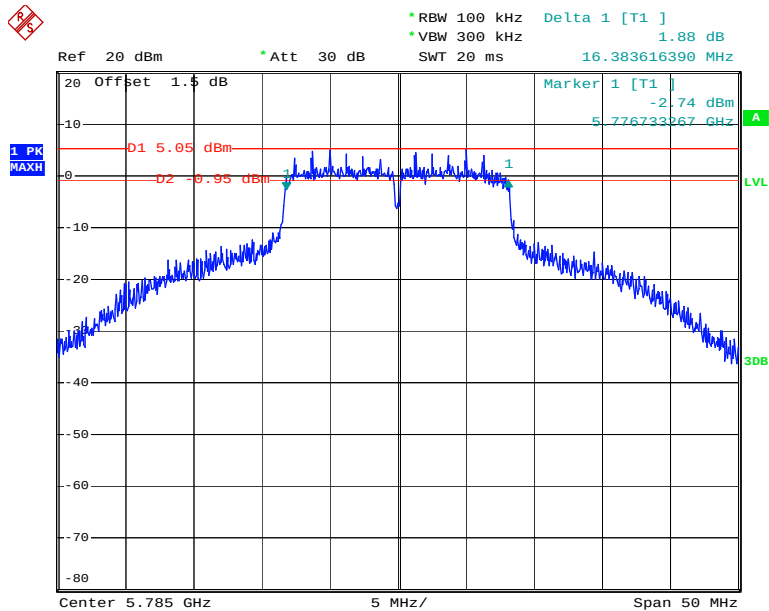


Date: 12.MAY.2014 16:20:33

Chain 0: 802.11a High Channel

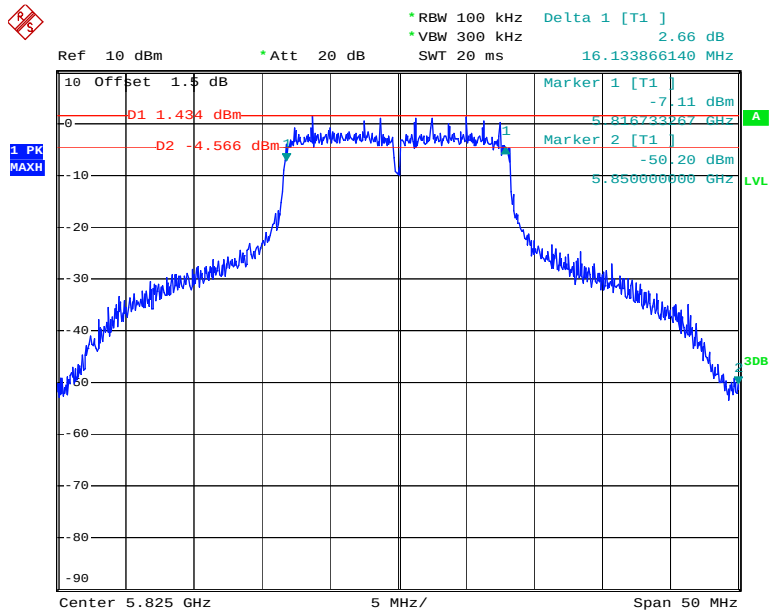


Date: 7.MAY.2014 10:51:05

Chain 1: 802.11a Low Channel

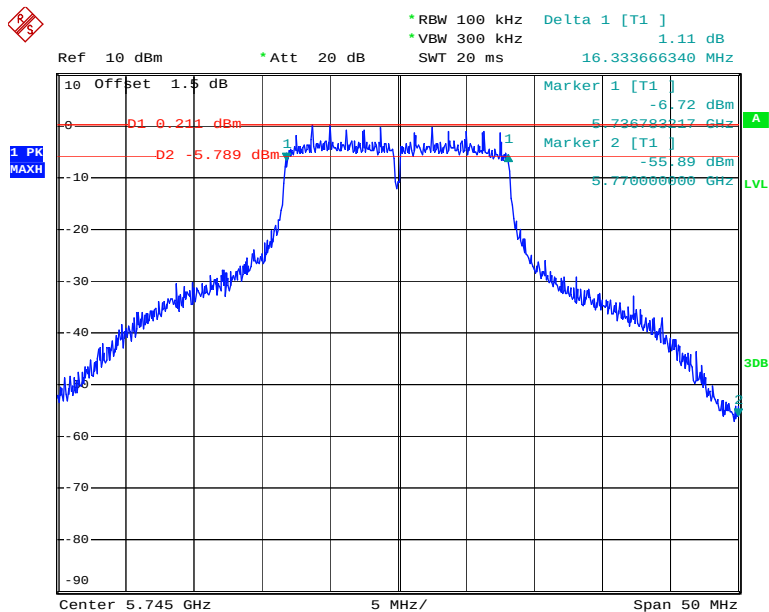


Date: 9.MAY.2014 16:32:30

Chain 1: 802.11a Middle Channel

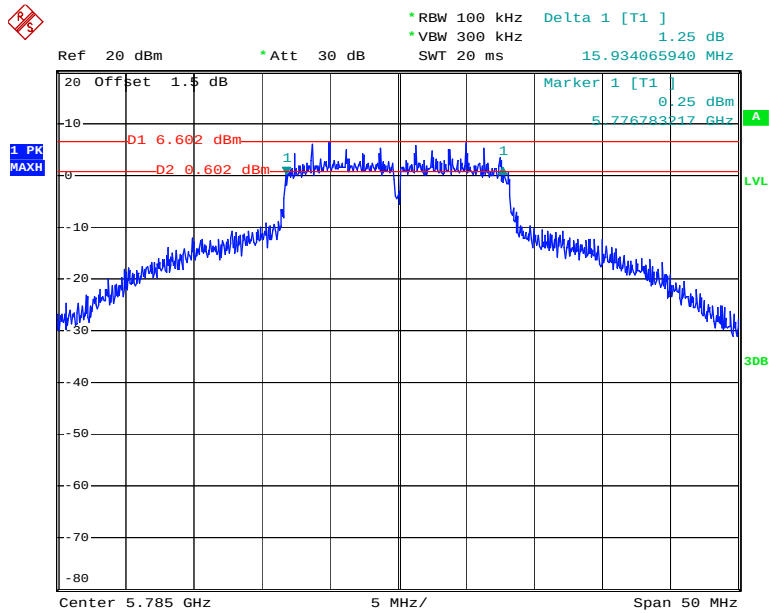


Date: 12.MAY.2014 16:22:11

Chain 1: 802.11a High Channel

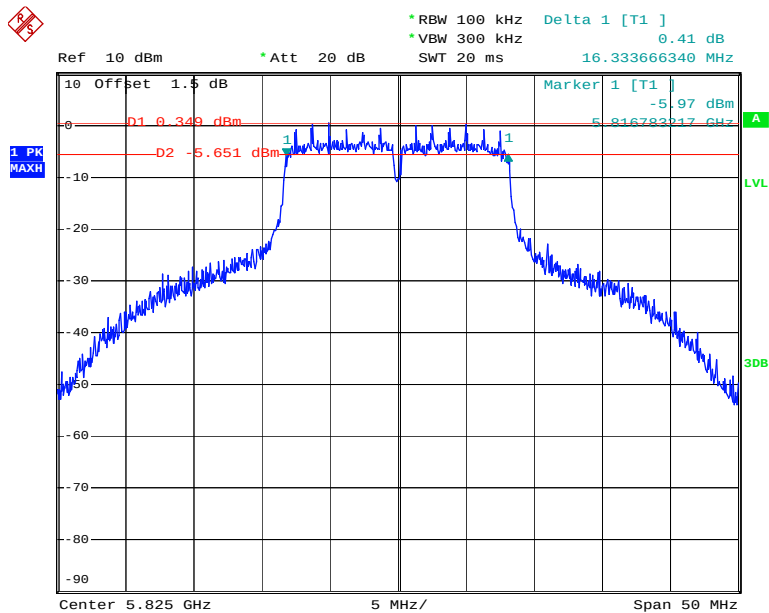


Date: 9.MAY.2014 16:27:15

Chain 0:802.11n ht20 Low Channel

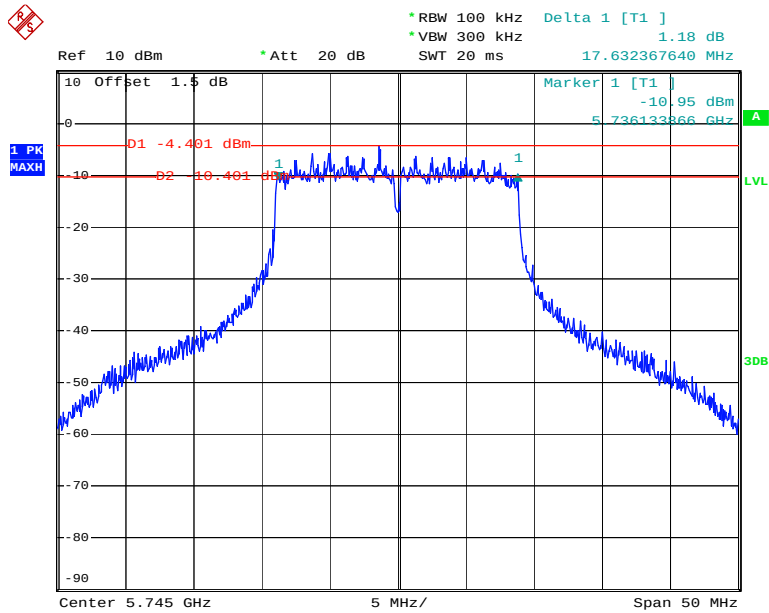


Date: 7.MAY.2014 10:57:16

Chain 0:802.11n ht20 Middle Channel

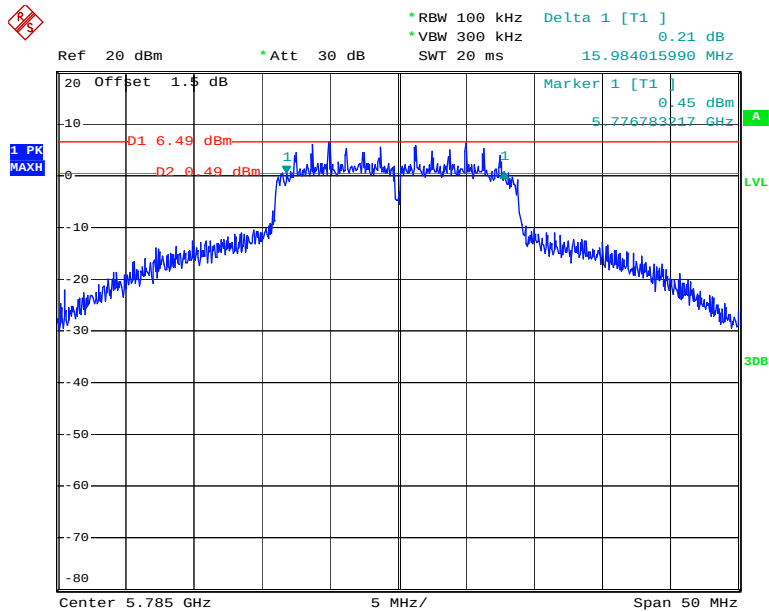


Date: 12.MAY.2014 16:26:11

Chain 0:802.11n ht20 High Channel

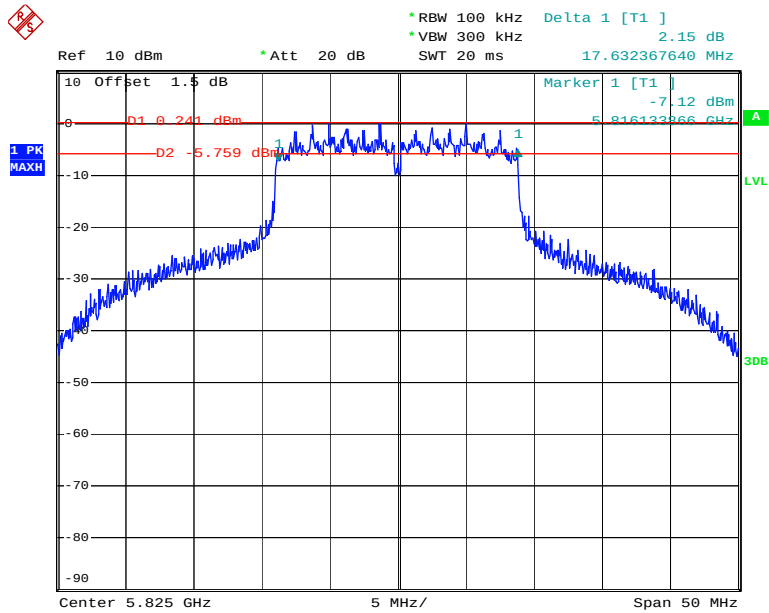


Date: 7.MAY.2014 11:08:23

Chain 1:802.11n ht20 Low Channel

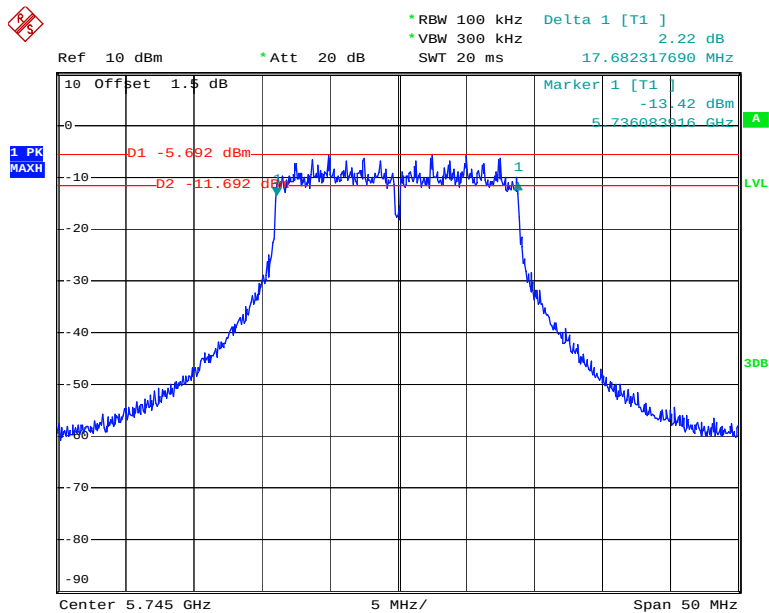


Date: 7.MAY.2014 10:54:48

Chain 1:802.11n ht20 Middle Channel

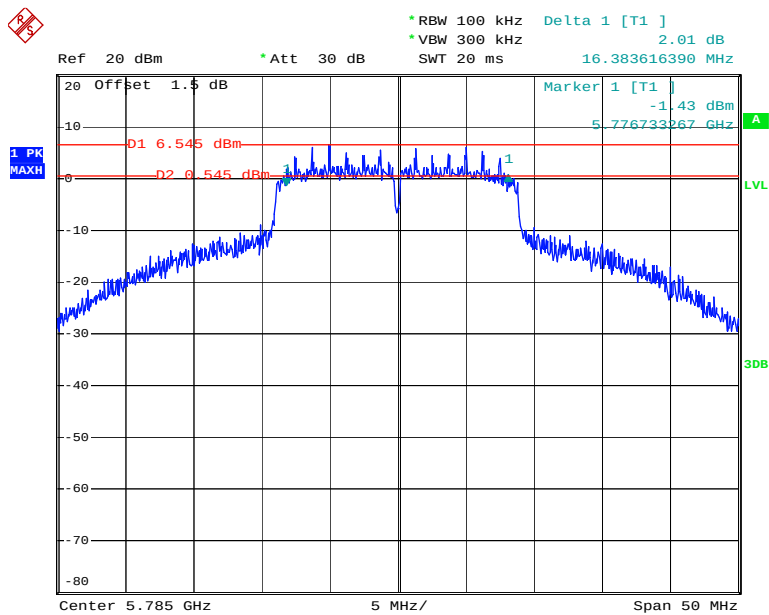


Date: 12.MAY.2014 16:27:57

Chain 1:802.11n ht20 High Channel

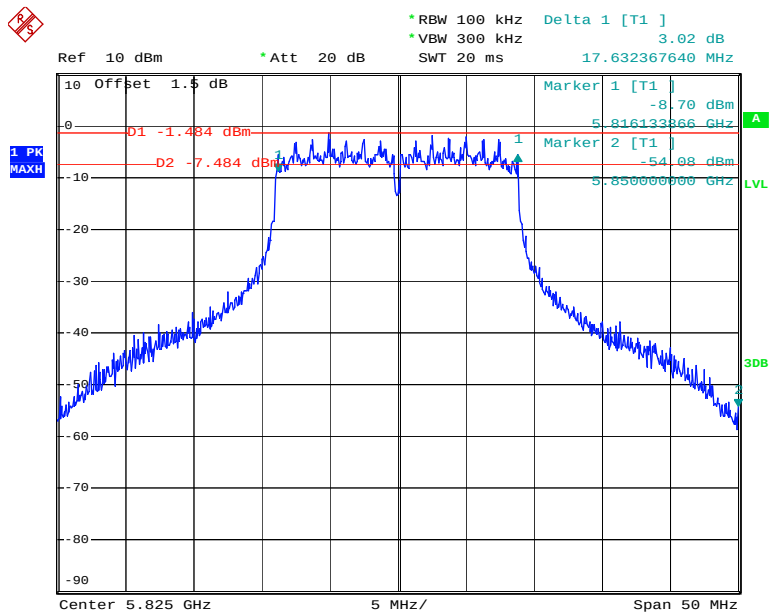


Date: 7.MAY.2014 11:06:07

Chain 0:802.11n ht40 Low Channel

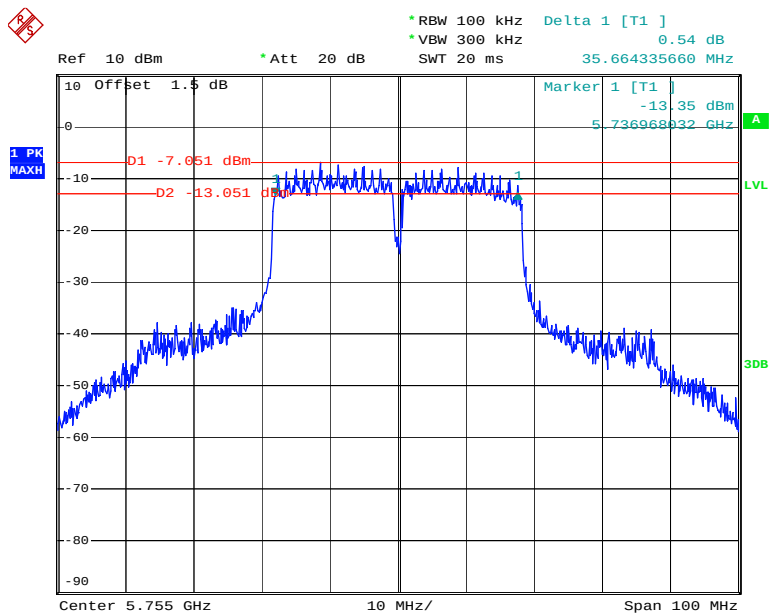


Date: 7.MAY.2014 11:11:27

Chain 0:802.11n ht40 High Channel

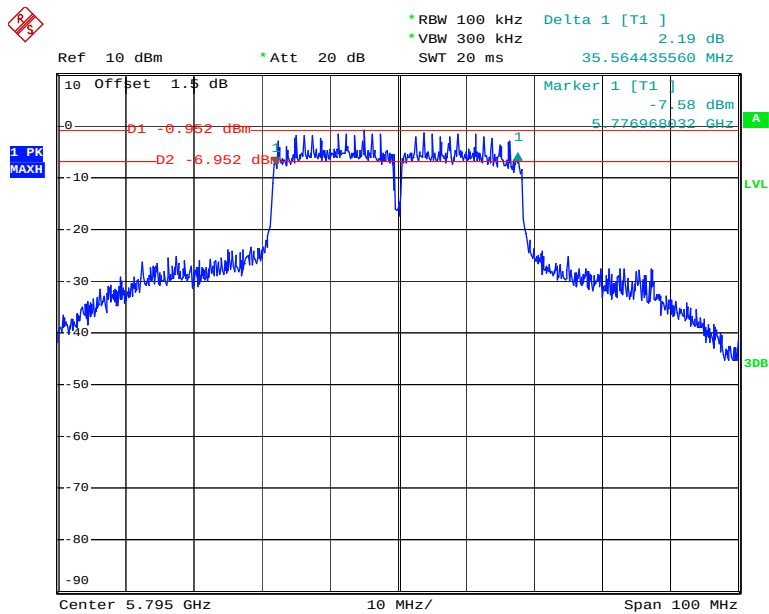


Date: 13.MAY.2014 16:49:56

Chain 1:802.11n ht40 Low Channel

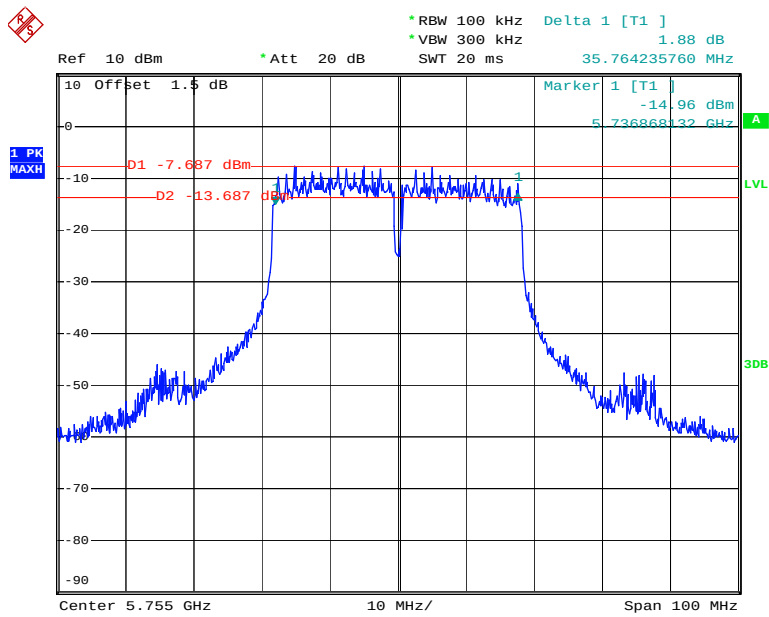

Date: 7.MAY.2014 11:13:58

Chain 1:802.11n ht40 High Channel

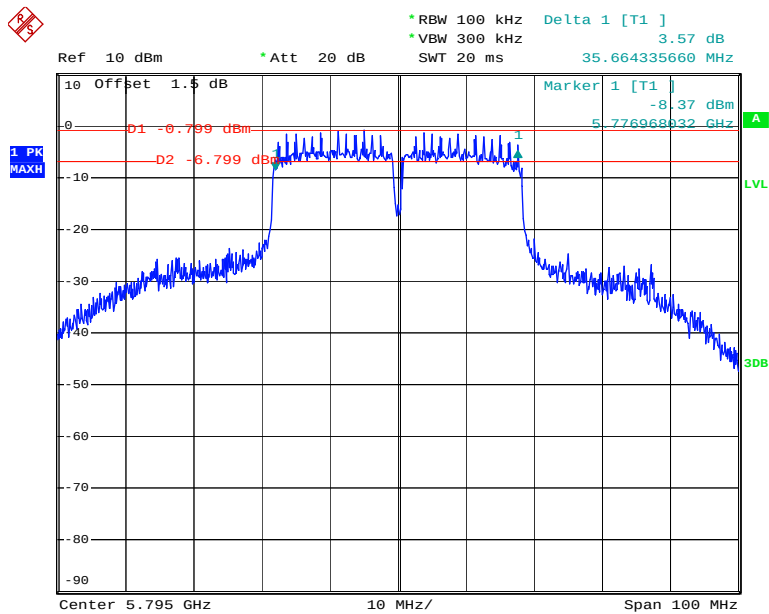

Date: 13.MAY.2014 16:47:32

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER


Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r01clause9.2.2.2

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.2~26.5 °C
Relative Humidity:	61~68 %
ATM Pressure:	100~100.9 kPa

The testing was performed by Dean Liu from 2014-04-30 to 2014-05-13.


Test Mode: Transmitting

Test mode	Channel	Frequency	Max Conducted Average Output Power (dBm)			Limit	Result
		(MHz)	Chain0	Chain1	Chain0+1	(dBm)	
2.4GHz band-802.11b	Low	2412	19.18	19.51	/	30	PASS
	Middle	2437	21.07	21.00	/	30	PASS
	High	2462	19.18	19.35	/	30	PASS
2.4GHz band-802.11g	Low	2412	17.08	17.12	/	30	PASS
	Middle	2437	21.65	21.46	/	30	PASS
	High	2462	18.65	17.62	/	30	PASS
2.4GHz band-802.11n ht20	Low	2412	15.62	16.05	18.85	30	PASS
	Middle	2437	19.49	19.76	22.64	30	PASS
	High	2462	15.29	16.11	18.73	30	PASS
2.4GHz band-802.11n ht40	Low	2422	13.03	14.06	16.59	30	PASS
	Middle	2437	19.56	19.55	22.57	30	PASS
	High	2452	13.38	14.22	16.83	30	PASS
5725-5850MHz band-802.11a	Low	5745	11.30	12.66	/	30	PASS
	Middle	5785	17.61	17.16	/	30	PASS
	High	5825	13.99	12.90	/	30	PASS
5725-5850MHz band-802.11n ht20	Low	5745	8.53	7.67	11.13	30	PASS
	Middle	5785	17.35	17.22	20.30	30	PASS
	High	5825	12.74	11.40	15.13	30	PASS
5725-5850MHz band-802.11n ht40	Low	5755	7.24	7.21	10.24	30	PASS
	High	5795	13.35	13.48	16.43	30	PASS

Please refer to the following plots


2.4GHz band:

Chain 0: 802.11b RF Output Power, Low Channel

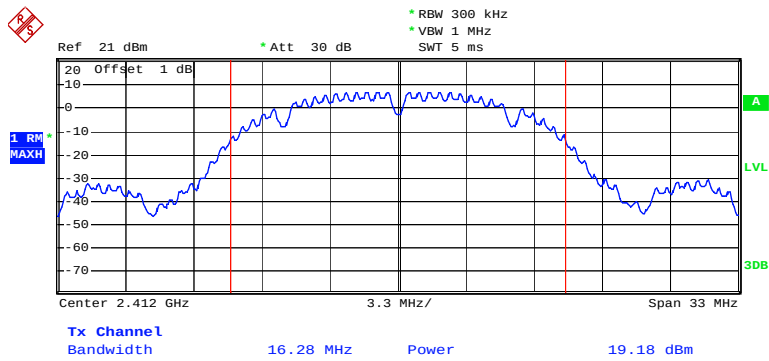


Date: 30.APR.2014 13:27:36

Chain 0: 802.11b OBW, Low Channel

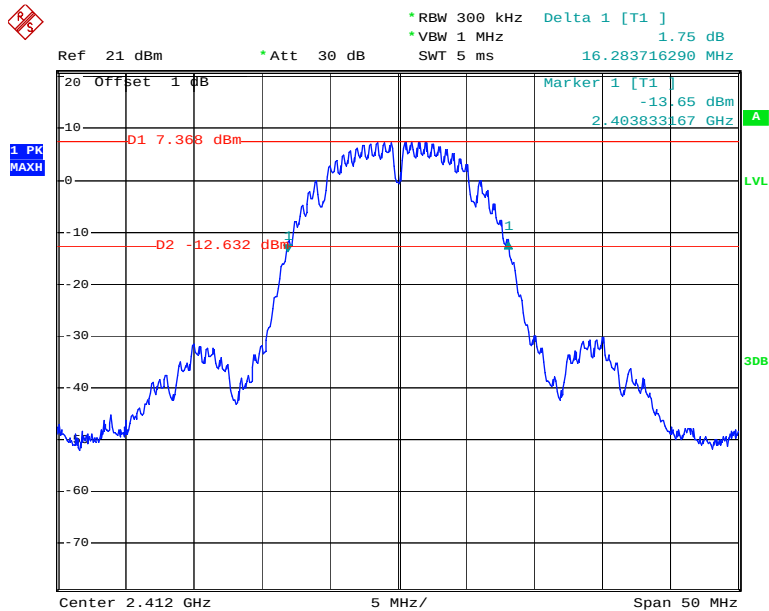


Date: 30.APR.2014 13:27:28

Chain 0: 802.11b RF Output Power, Middle Channel

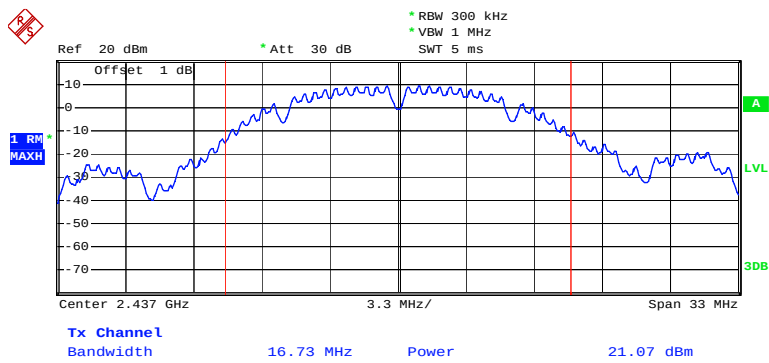


Date: 12.MAY.2014 15:30:30

Chain 0: 802.11b OBW, Middle Channel

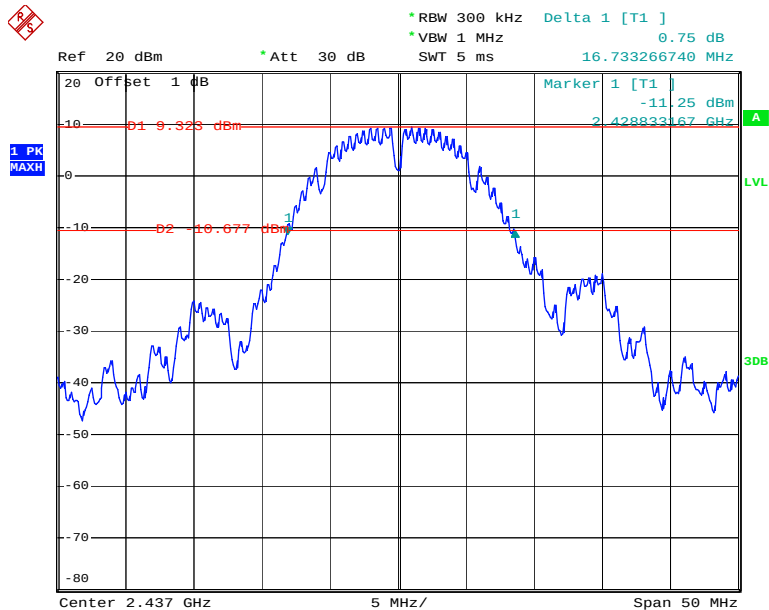


Date: 12.MAY.2014 15:30:19

Chain 0: 802.11b RF Output Power, High Channel

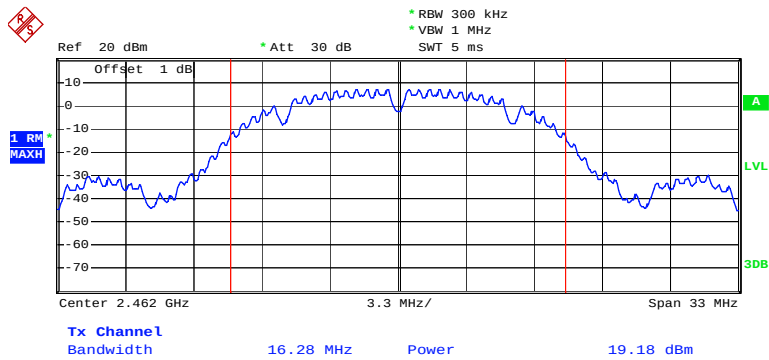


Date: 30.APR.2014 13:30:36

Chain 0: 802.11b OBW, High Channel

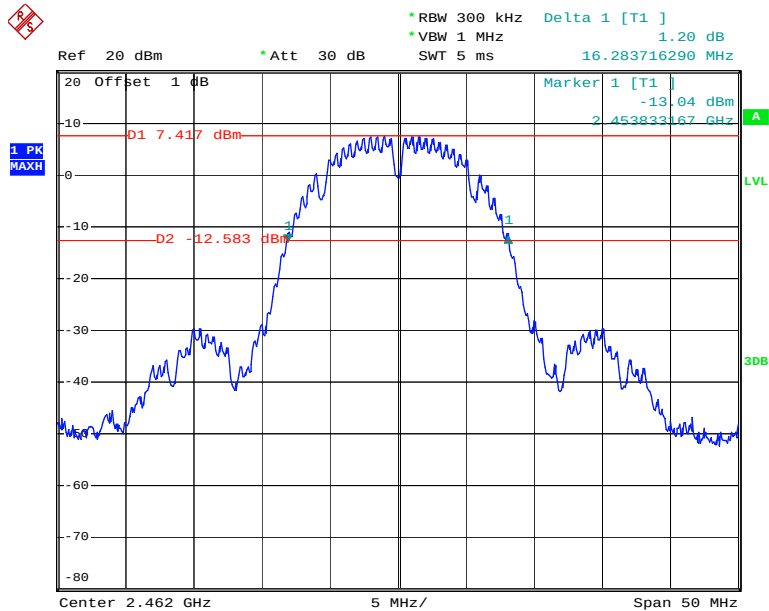


Date: 30.APR.2014 13:30:28

Chain 1: 802.11b RF Output Power, Low Channel

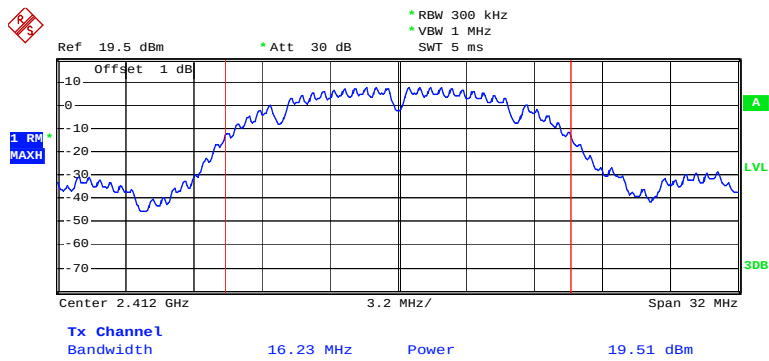


Date: 9.MAY.2014 16:37:49

Chain 1: 802.11b OBW, Low Channel

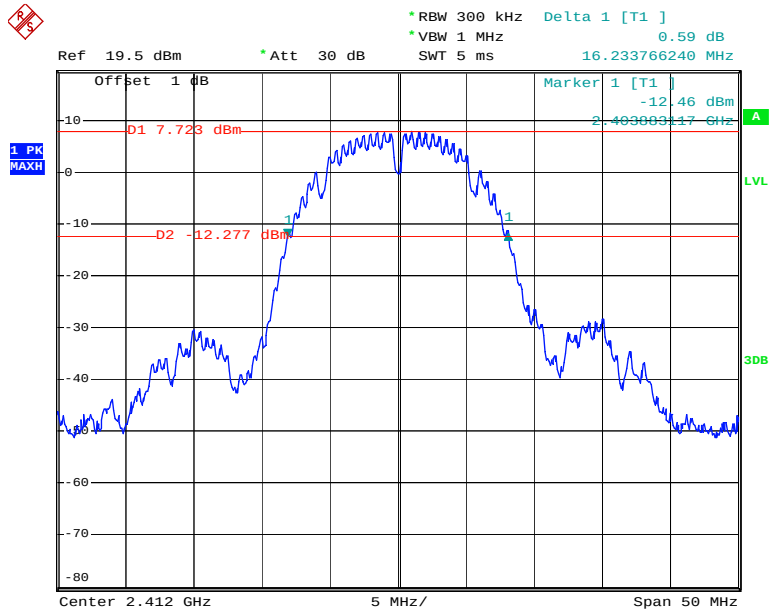


Date: 9.MAY.2014 16:37:38

Chain 1: 802.11b RF Output Power, Middle Channel

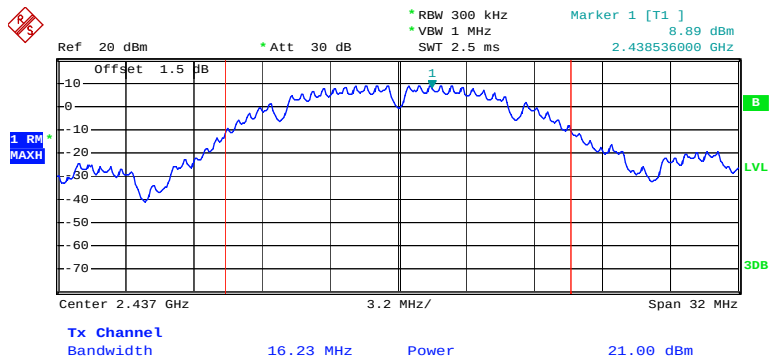


Date: 9.MAY.2014 15:28:07

Chain 1: 802.11b OBW, Middle Channel

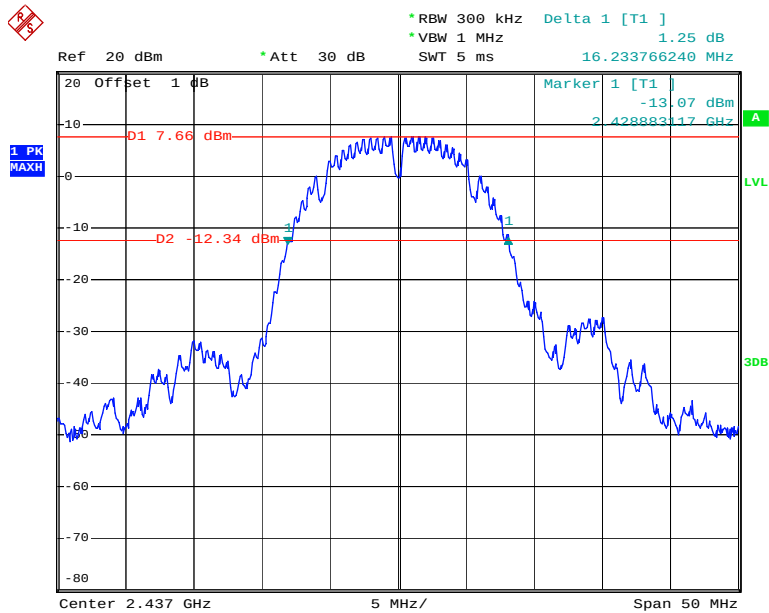


Date: 9.MAY.2014 16:39:38

Chain 1: 802.11b RF Output Power, High Channel

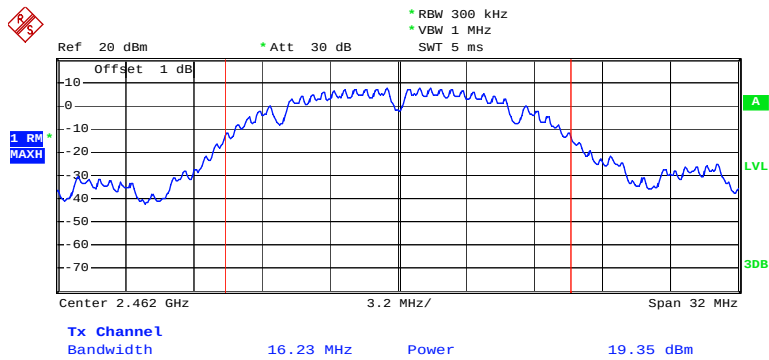


Date: 9.MAY.2014 16:41:24

Chain 1: 802.11b OBW, High Channel

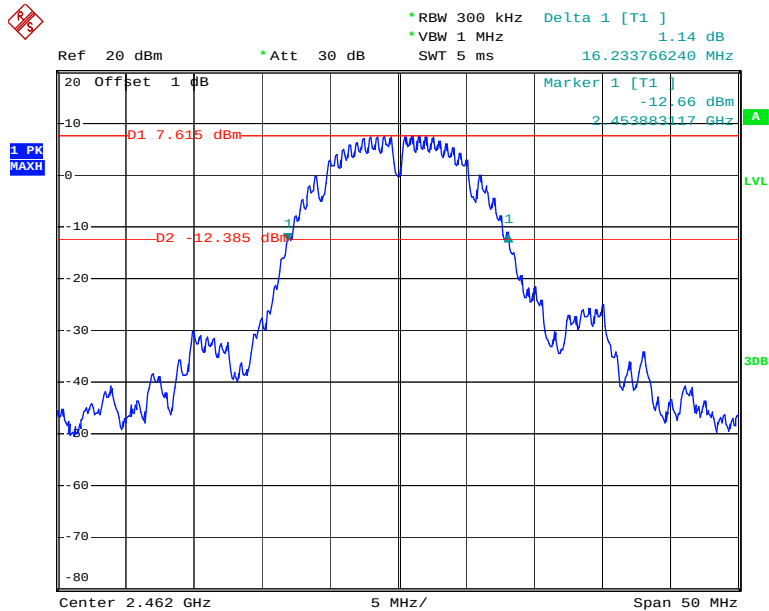


Date: 9.MAY.2014 16:41:11

Chain 0: 802.11g RF Output Power, Low Channel

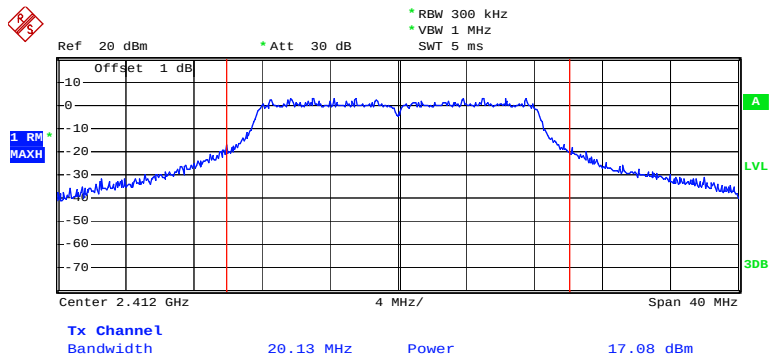


Date: 30.APR.2014 13:35:35

Chain 0: 802.11g OBW, Low Channel

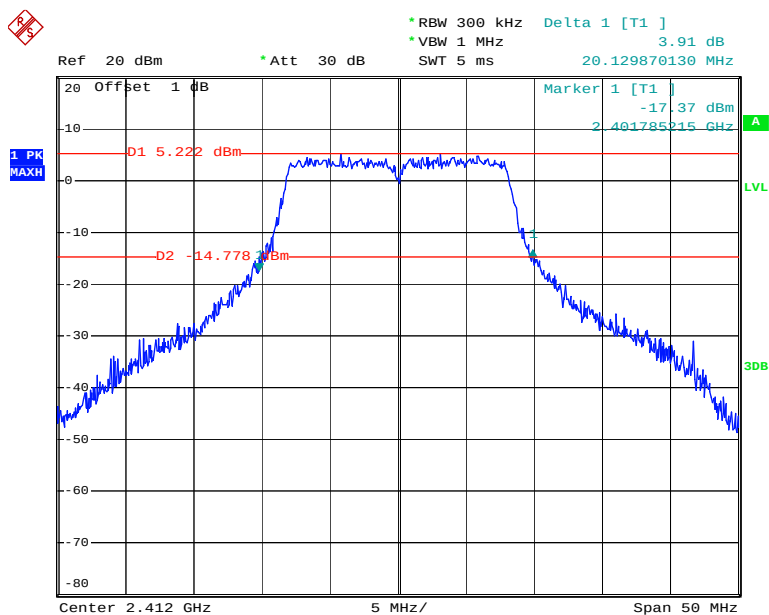


Date: 30.APR.2014 13:35:19

Chain 0: 802.11g RF Output Power, Middle Channel

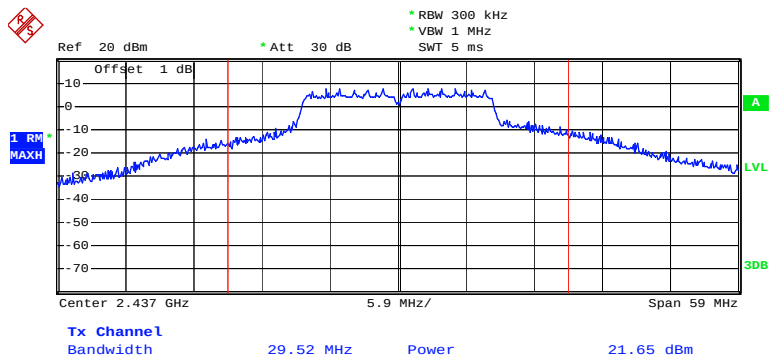


Date: 12.MAY.2014 15:32:56

Chain 0: 802.11g OBW, Middle Channel

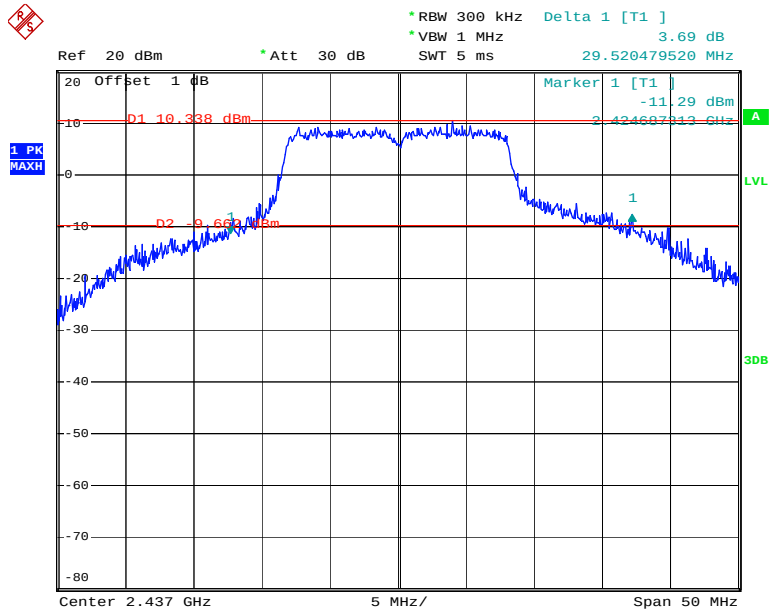


Date: 12.MAY.2014 15:32:41

Chain 0: 802.11g RF Output Power, High Channel

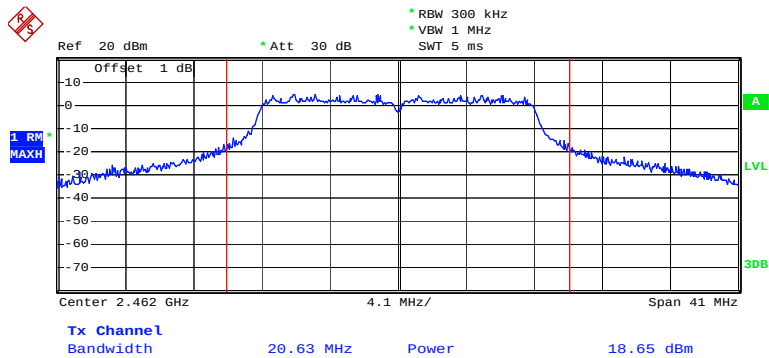


Date: 30.APR.2014 13:39:38

Chain 0: 802.11g OBW, High Channel

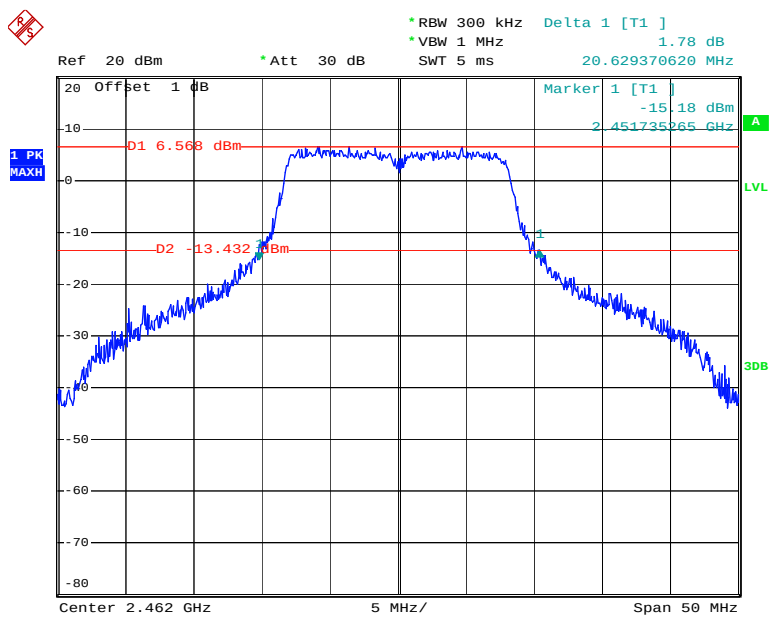


Date: 30.APR.2014 13:39:23

Chain 1: 802.11g RF Output Power, Low Channel

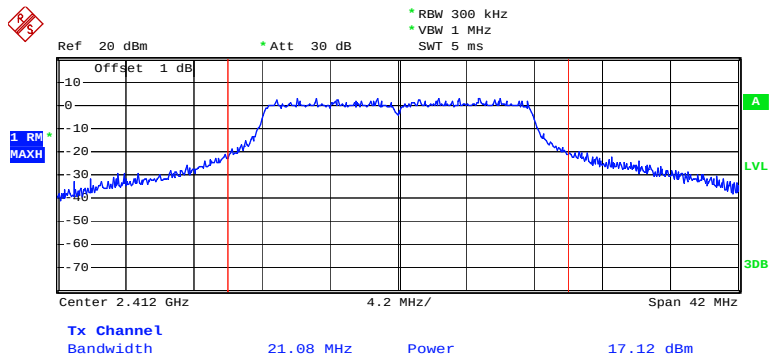


Date: 9.MAY.2014 16:47:20


Chain 1: 802.11g OBW, Low Channel

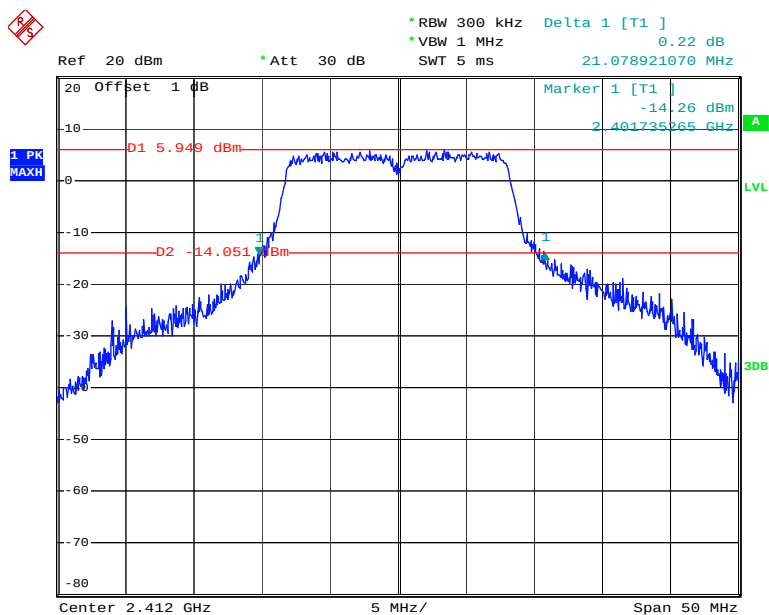

Date: 9.MAY.2014 16:46:52

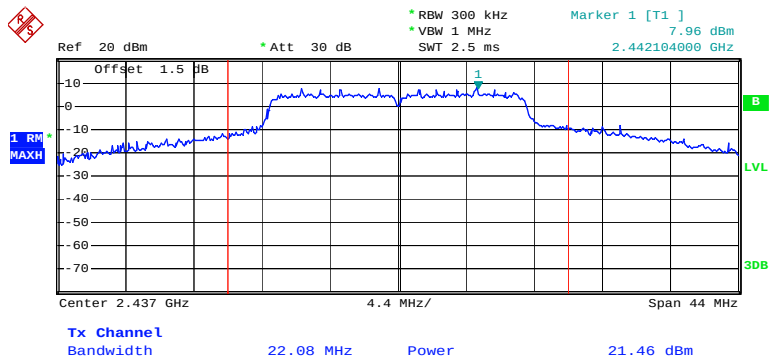
Chain 1: 802.11g RF Output Power, Middle Channel

Date: 9.MAY.2014 15:29:41

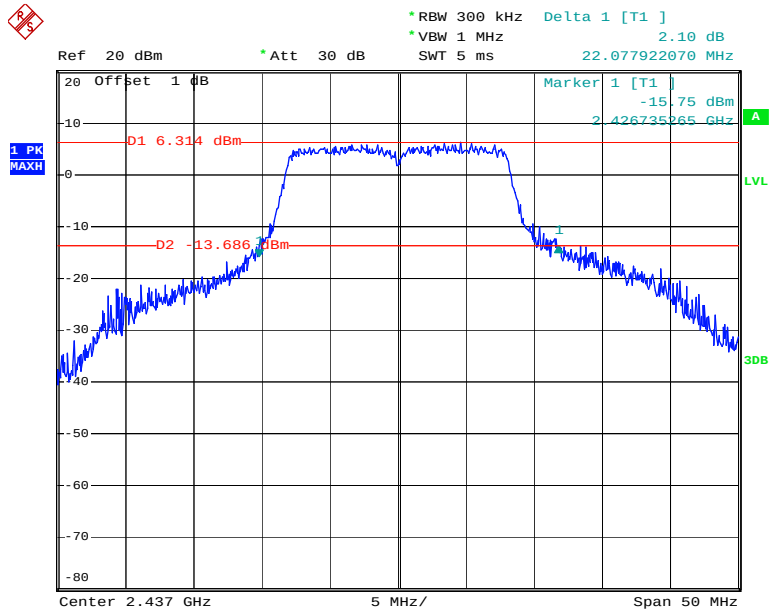Chain 1: 802.11g OBW, Middle Channel


Date: 9.MAY.2014 16:45:14

Chain 1: 802.11g RF Output Power, High Channel

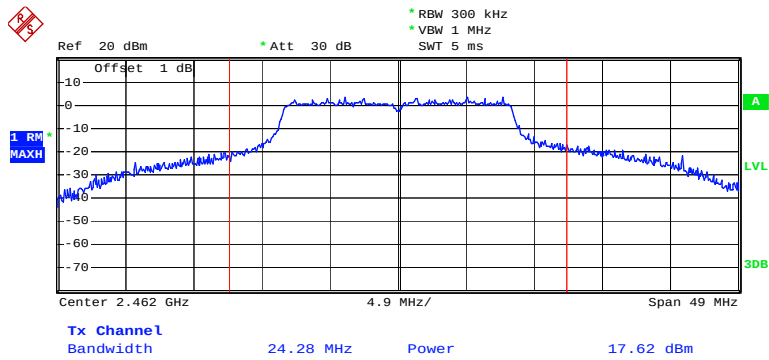


Date: 9.MAY.2014 16:43:40

Chain 1: 802.11g OBW, High Channel

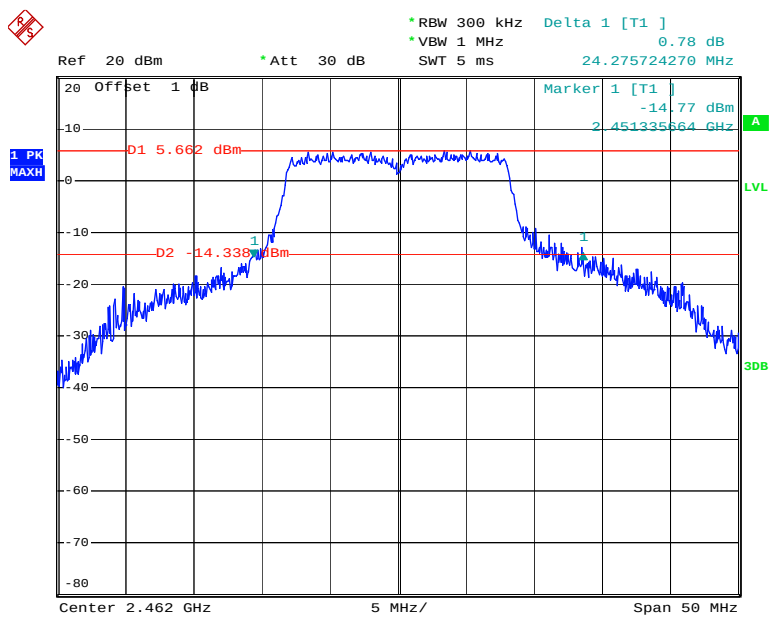


Date: 9.MAY.2014 16:43:28

Chain 0: 802.11n ht20 RF Output Power, Low Channel

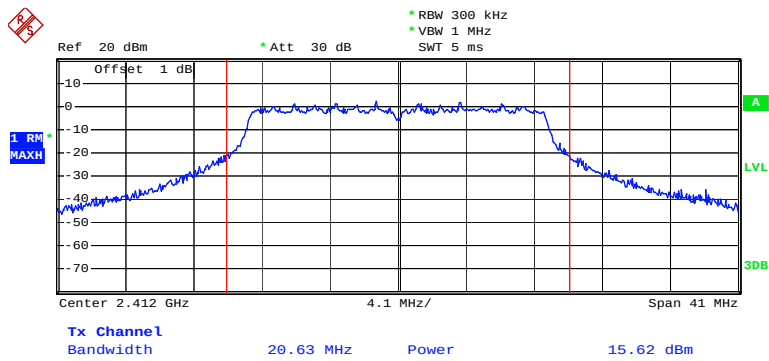


Date: 30.APR.2014 13:42:10


Chain 0: 802.11n ht20 OBW, Low Channel

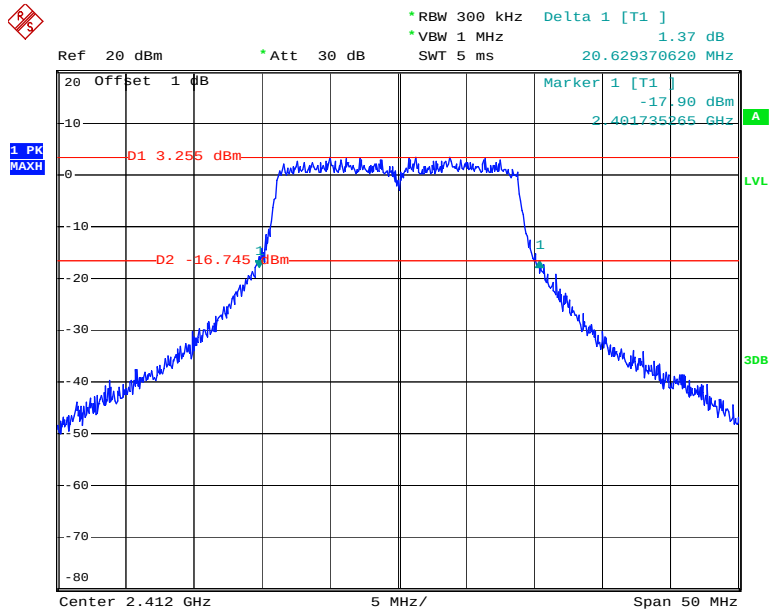

Date: 30.APR.2014 13:41:56

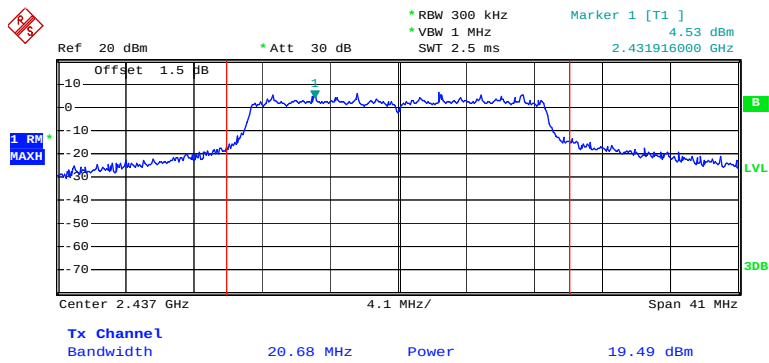
Chain 0: 802.11n ht20 RF Output Power, Middle Channel

Date: 9.MAY.2014 15:32:21

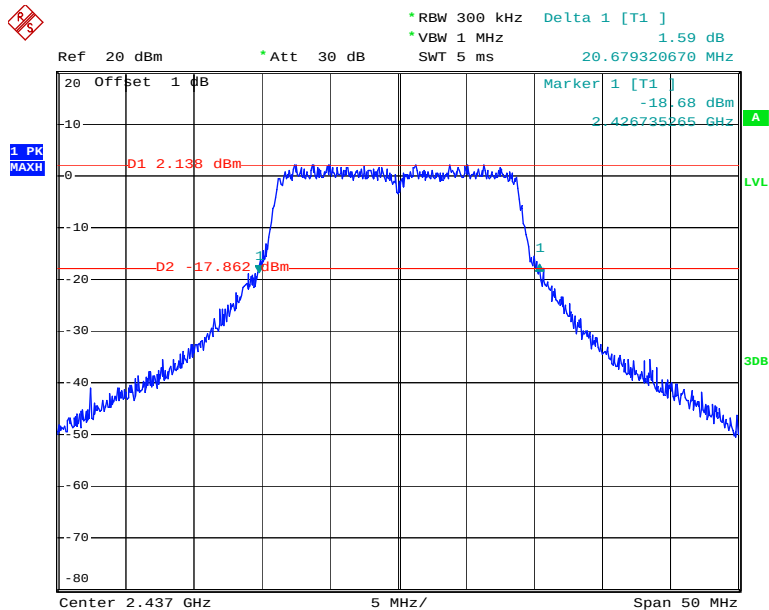Chain 0: 802.11n ht20 OBW, Middle Channel


Date: 30.APR.2014 13:47:16

Chain 0: 802.11n ht20 RF Output Power, High Channel

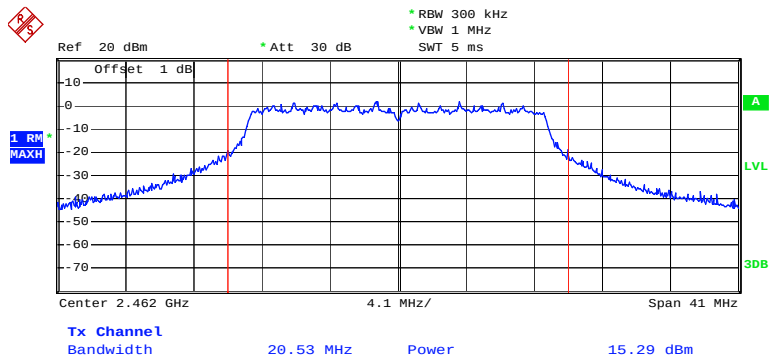


Date: 30.APR.2014 13:49:15

Chain 0: 802.11n ht20 OBW, High Channel

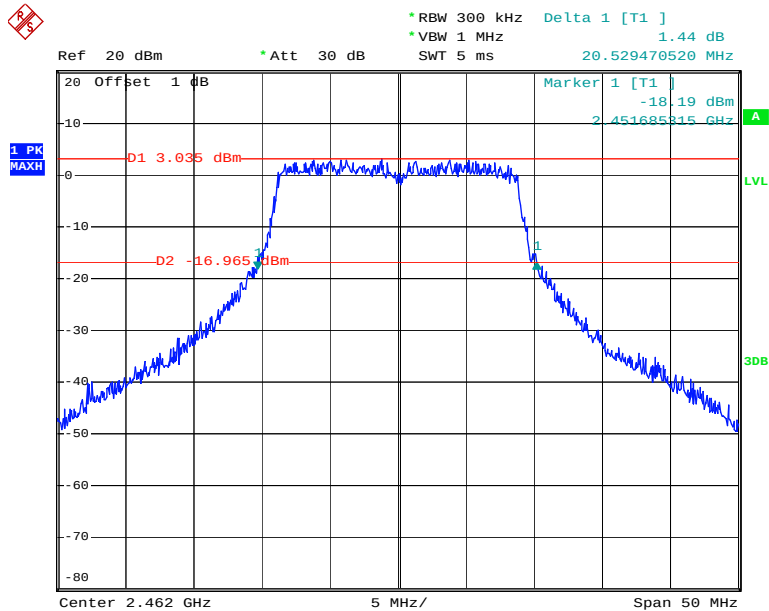


Date: 30.APR.2014 13:48:54

Chain 1: 802.11n ht20 RF Output Power, Low Channel

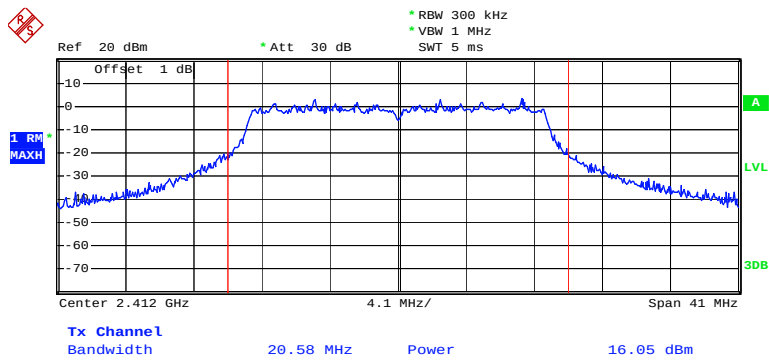


Date: 30.APR.2014 13:43:54

Chain 1: 802.11n ht20 OBW, Low Channel

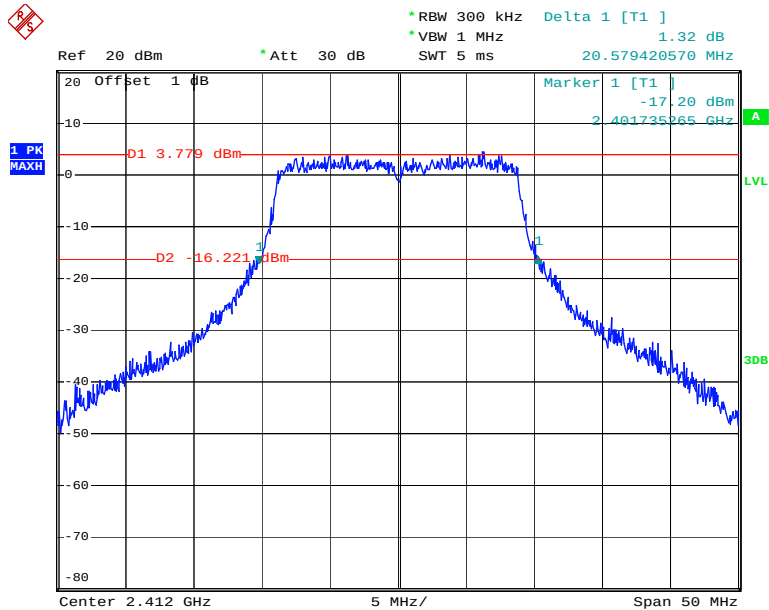


Date: 30.APR.2014 13:43:40

Chain 1: 802.11n ht20 RF Output Power, Middle Channel

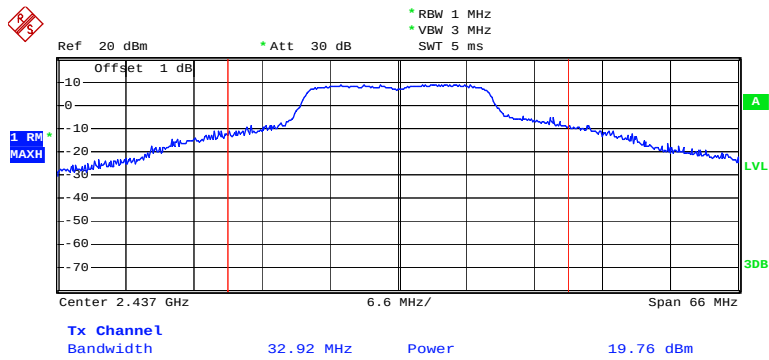


Date: 12.MAY.2014 16:06:26


Chain 1: 802.11n ht20 OBW, Middle Channel

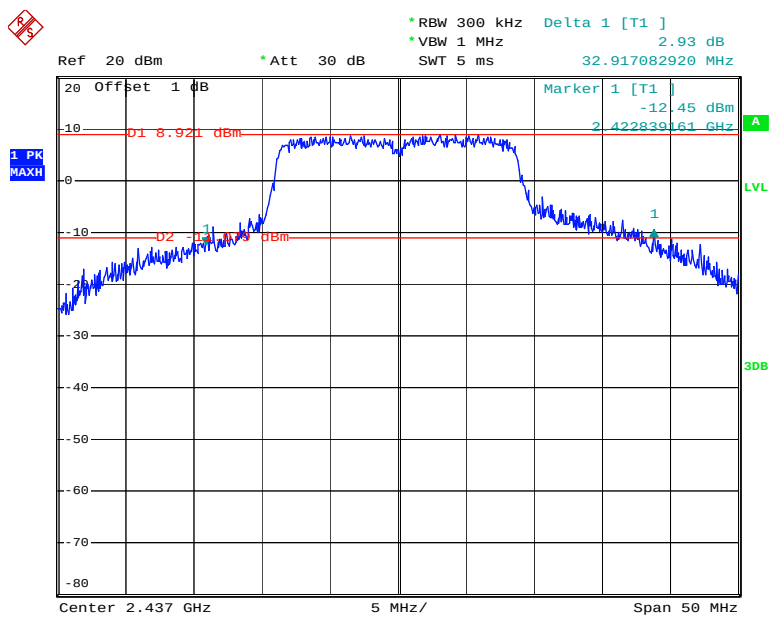

Date: 12.MAY.2014 16:05:11

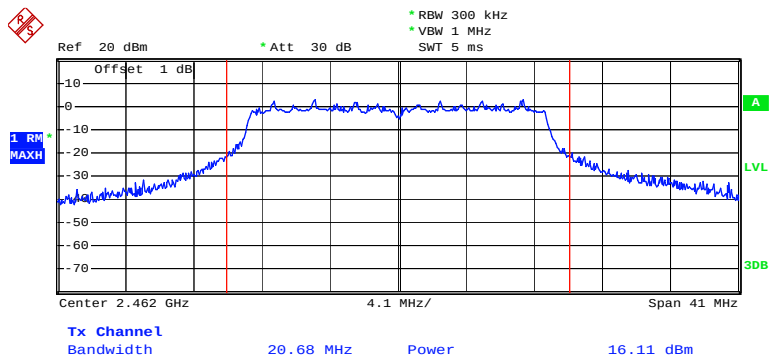
Chain 1: 802.11n ht20 RF Output Power, High Channel

Date: 30.APR.2014 14:19:08

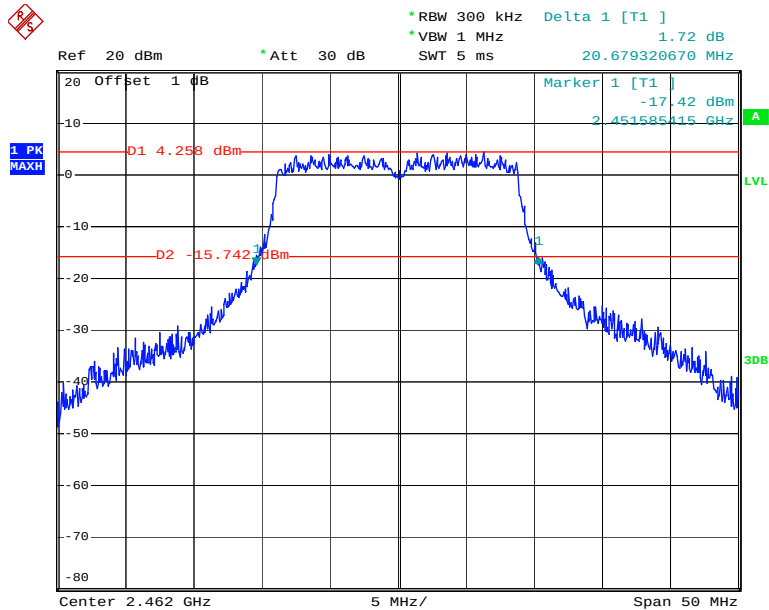
Chain 1: 802.11n ht20 OBW, High Channel

Date: 30.APR.2014 14:18:56

Chain 0: 802.11n ht40 OBW, Low Channel




Chain 0: 802.11n ht40 RF Output Power, Middle Channel

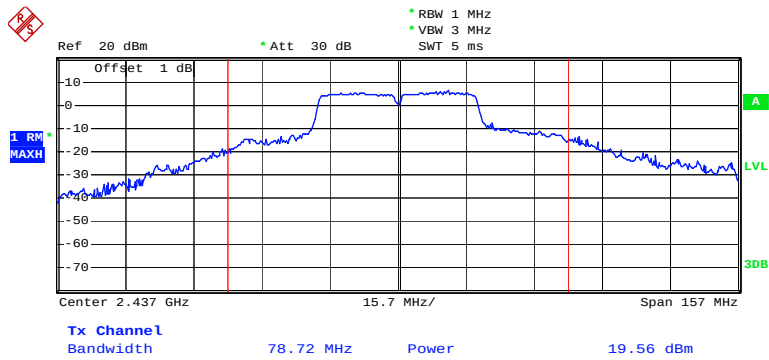


Date: 12.MAY.2014 16:09:37

Chain 0: 802.11n ht40 OBW, Middle Channel

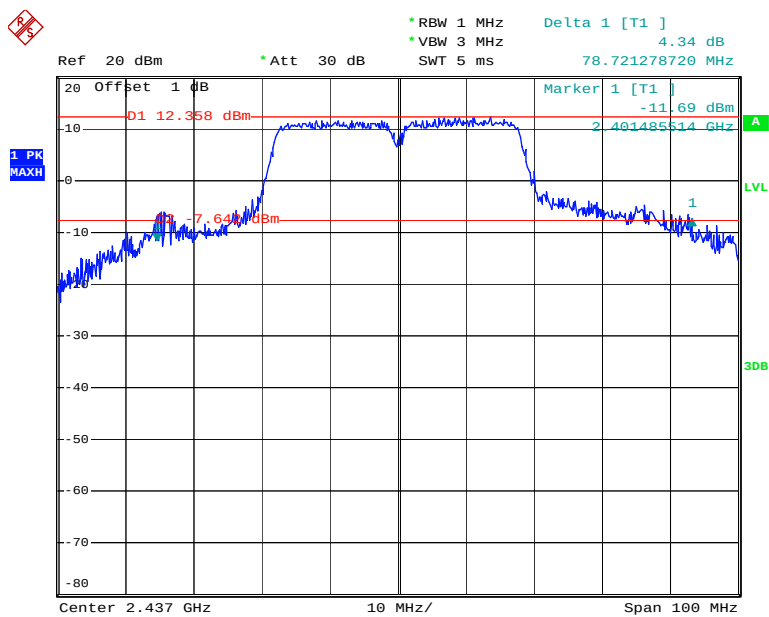


Date: 12.MAY.2014 16:09:20

Chain 0: 802.11n ht40 RF Output Power, High Channel

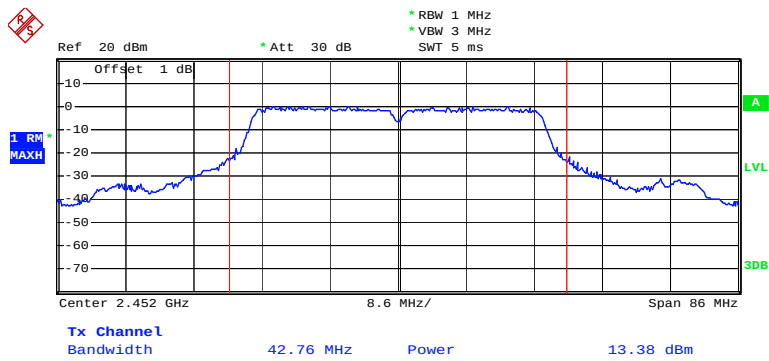


Date: 6.MAY.2014 10:29:49

Chain 0: 802.11n ht40 OBW, High Channel

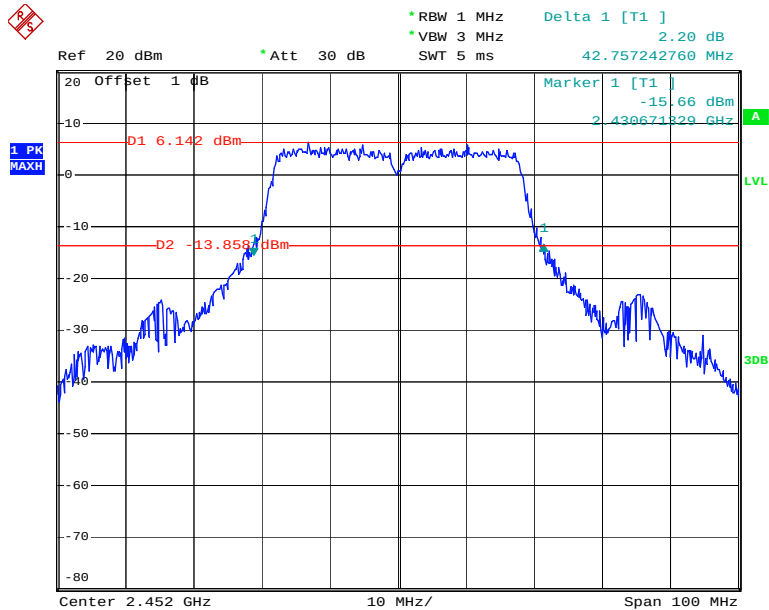


Date: 6.MAY.2014 10:29:26

Chain 1: 802.11n ht40 RF Output Power, Low Channel

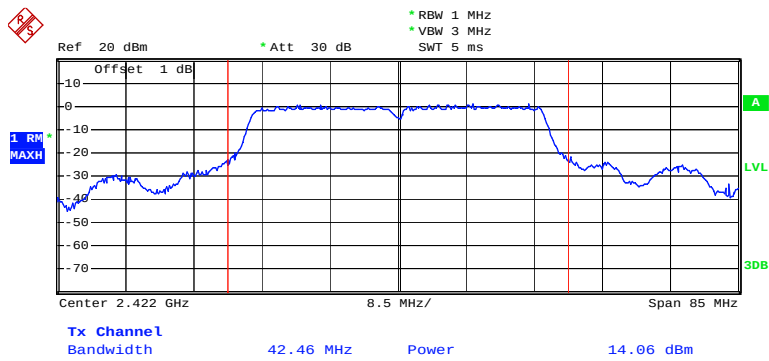

Date: 6.MAY.2014 10:20:52

Chain 1: 802.11n ht40 OBW, Low Channel

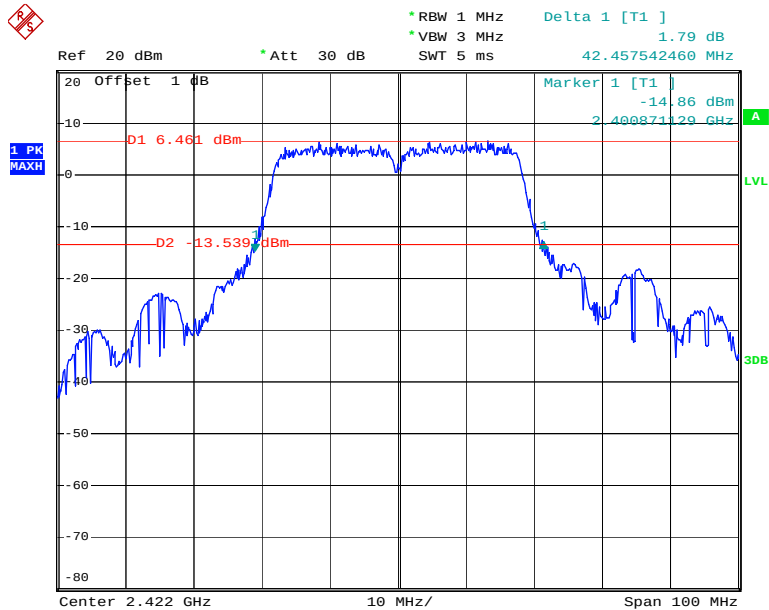

Date: 6.MAY.2014 10:20:20

Ref 20 dBm * Att 30 dB * RBW 1 MHz * VBW 3 MHz * SWT 5 ms

Offset 1 dB

1. RM MAXH

Center 2.437 GHz 15.9 MHz/ Span 159 MHz


Tx Channel Bandwidth 79.32 MHz Power 19.55 dBm


30dB

LVL


A

Chain 1: 802.11n ht40 OBW, Middle Channel



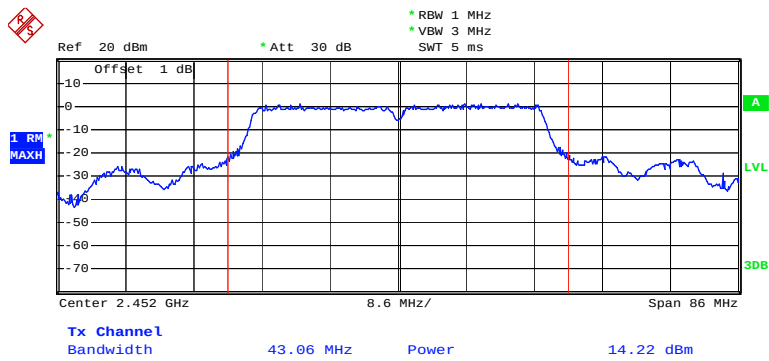Chain 1: 802.11n ht40 RF Output Power, High Channel


Date: 6.MAY.2014 10:31:48

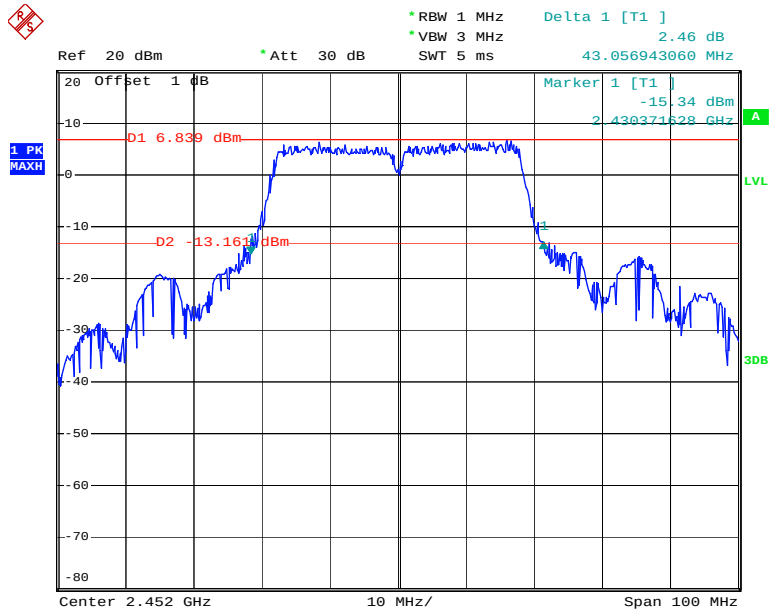Chain 1: 802.11n ht40 OBW, High Channel

Date: 6.MAY.2014 10:31:26


5725-5850MHz:

Chain 0:802.11a RF Output Power, Low Channel

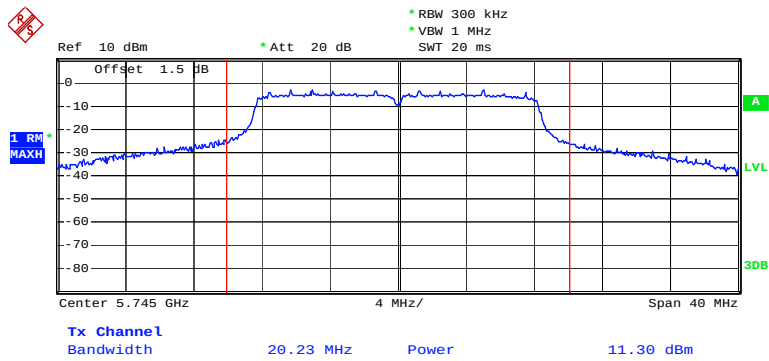

Date: 7.MAY.2014 10:46:03

Chain 0:802.11a OBW, Low Channel

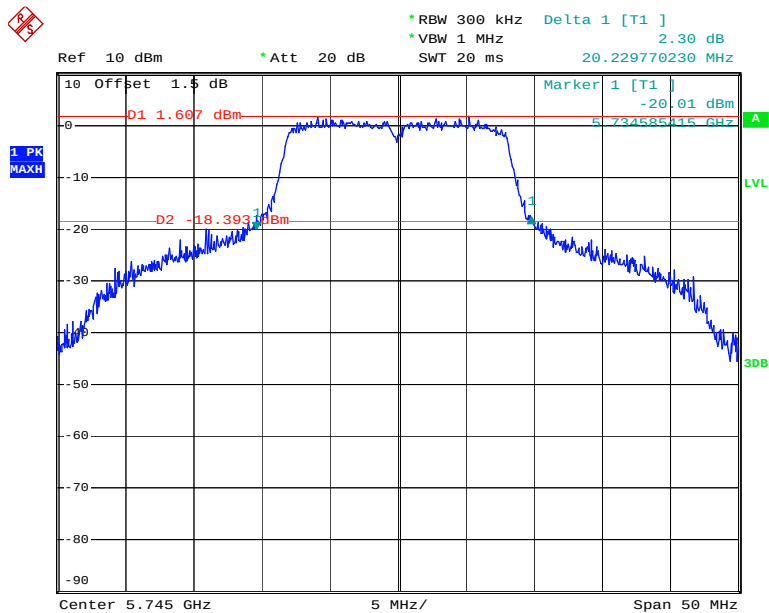

Date: 7.MAY.2014 10:45:45

Ref 20 dBm
 *RBW 1 MHz
 *VBW 3 MHz
 *Att 30 dB
 SWT 20 ms

Offset 1.5 dB


1. RM
 MAXH

Center 5.785 GHz
 6.4 MHz/
 Span 64 MHz


Tx Channel
 Bandwidth 32.12 MHz
 Power 17.61 dBm

30dB

Chain 0:802.11a OBW, Middle Channel




Chain 0:802.11a RF Output Power, High Channel

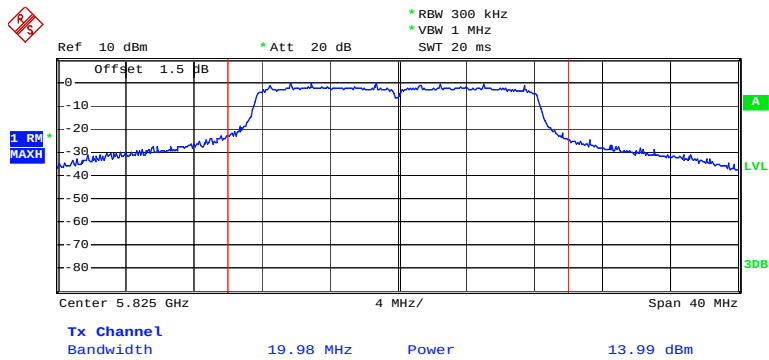


Date: 7.MAY.2014 10:51:32

Chain 0:802.11a OBW, High Channel

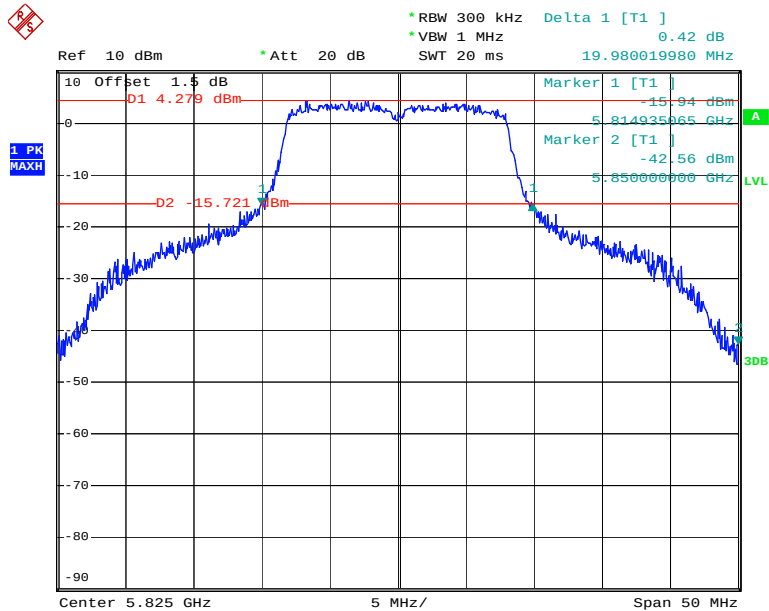


Date: 7.MAY.2014 10:51:19

Chain 1:802.11a RF Output Power, Low Channel

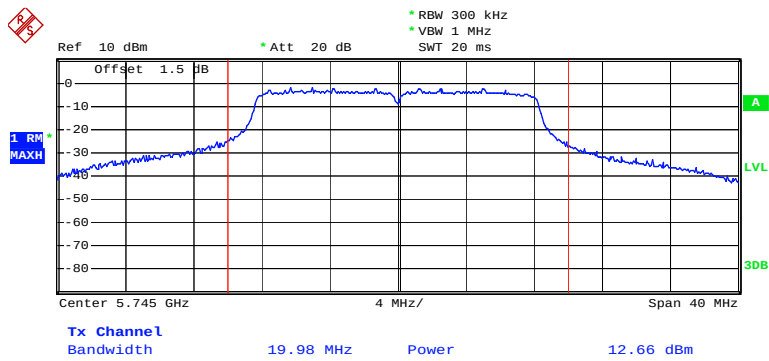


Date: 9.MAY.2014 16:32:58

Chain 1:802.11a OBW, Low Channel

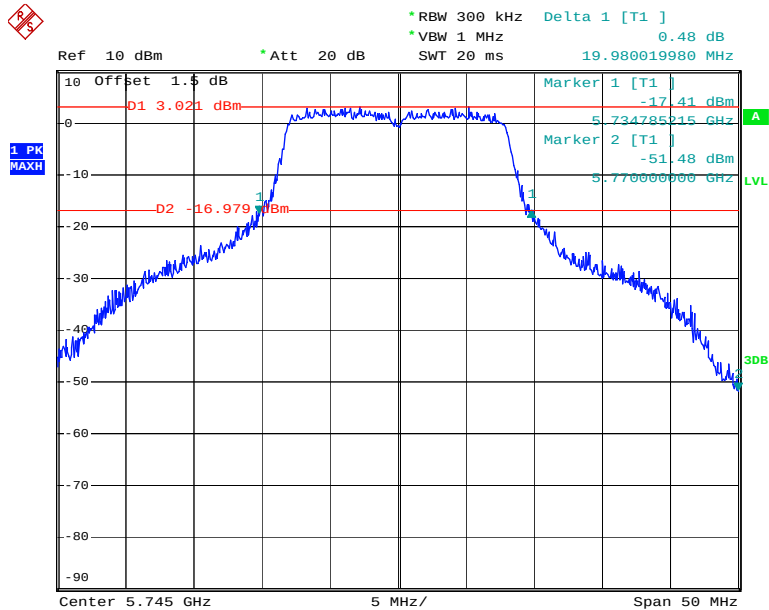


Date: 9.MAY.2014 16:32:44

Chain 1:802.11a RF Output Power, Middle Channel

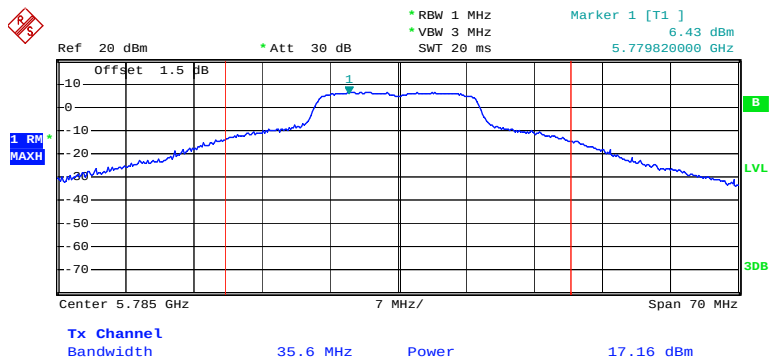


Date: 9.MAY.2014 15:41:48

Chain 1:802.11a OBW, Middle Channel

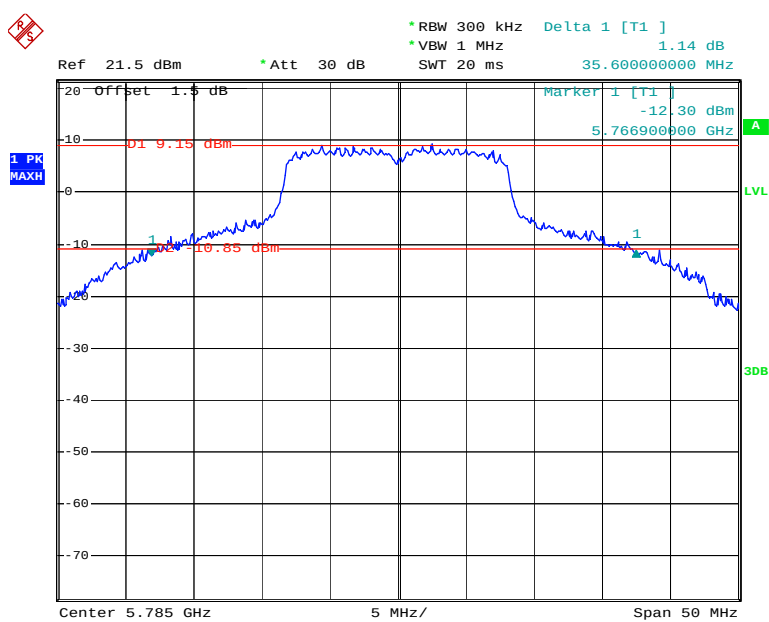


Date: 9.MAY.2014 15:39:23

Chain 1:802.11a RF Output Power, High Channel

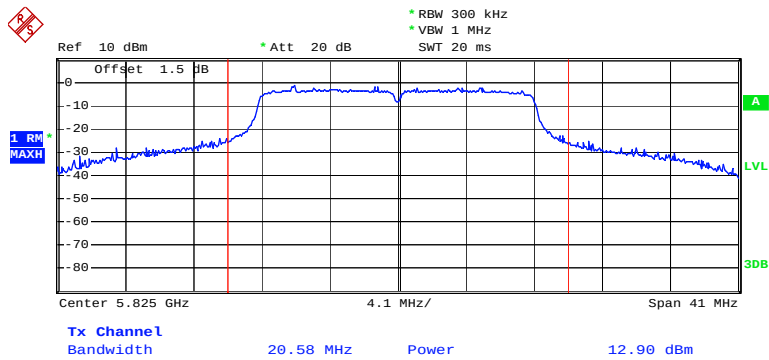


Date: 9.MAY.2014 16:27:38


Chain 1:802.11a OBW, High Channel

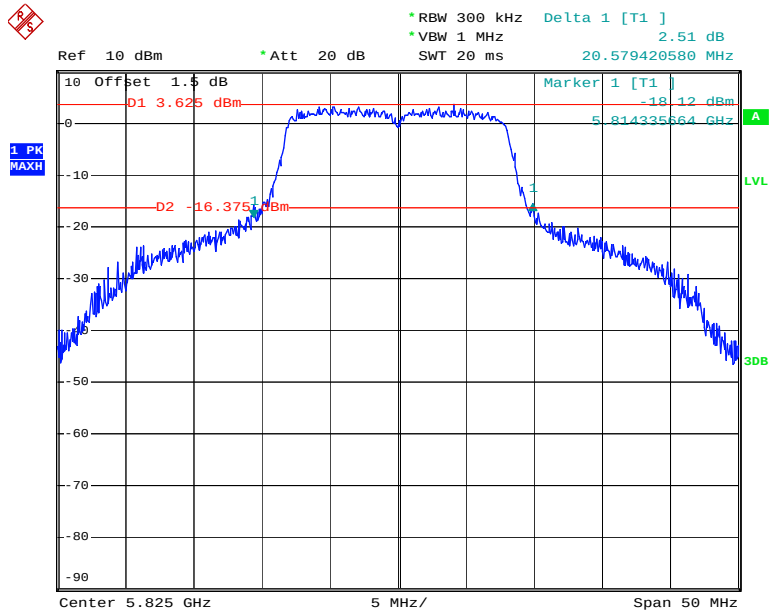

Date: 9.MAY.2014 16:27:29

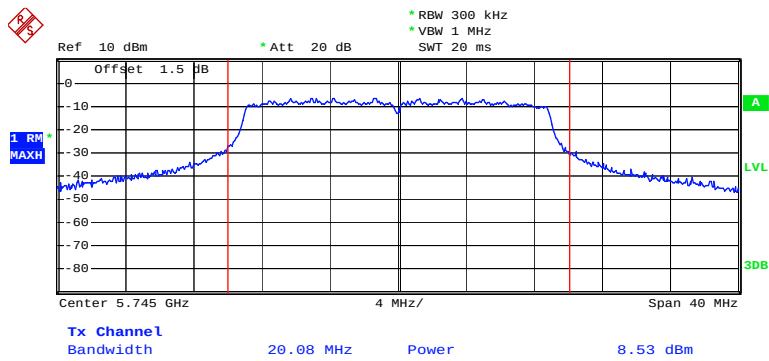
Chain 0:802.11n ht20 RF Output Power, Low Channel

Date: 7.MAY.2014 10:57:47

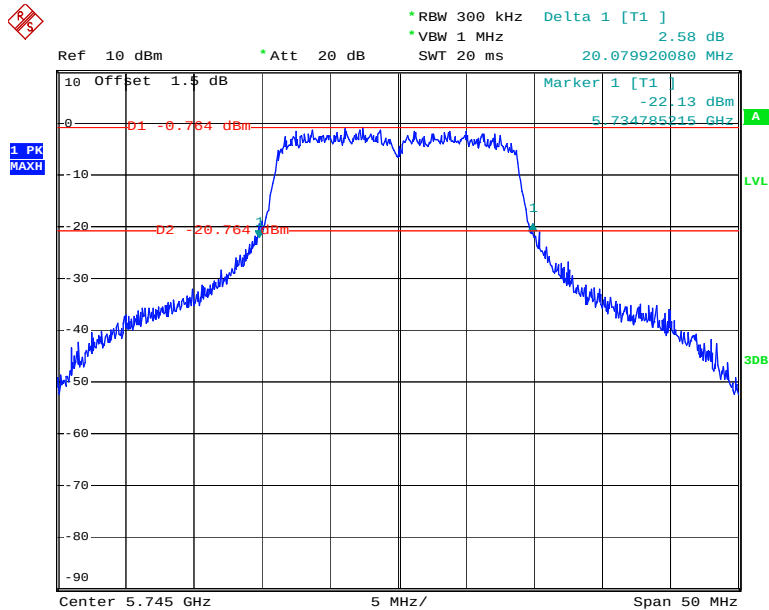Chain 0:802.11n ht20 OBW, Low Channel


Date: 7.MAY.2014 10:57:30

Chain 0:802.11n ht20 RF Output Power, Middle Channel

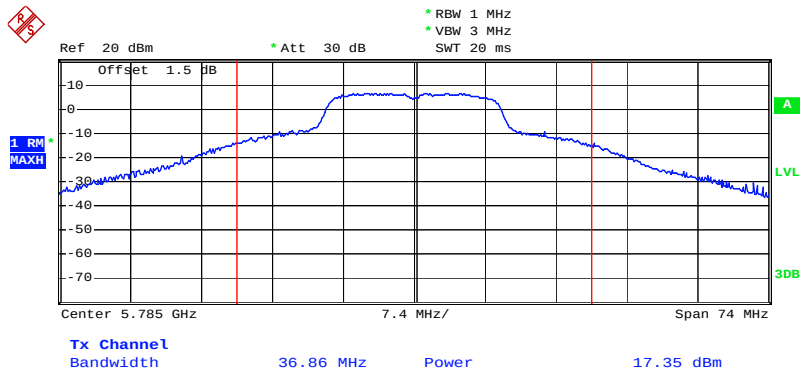


Date: 12.MAY.2014 16:26:36

Chain 0:802.11n ht20 OBW, Middle Channel

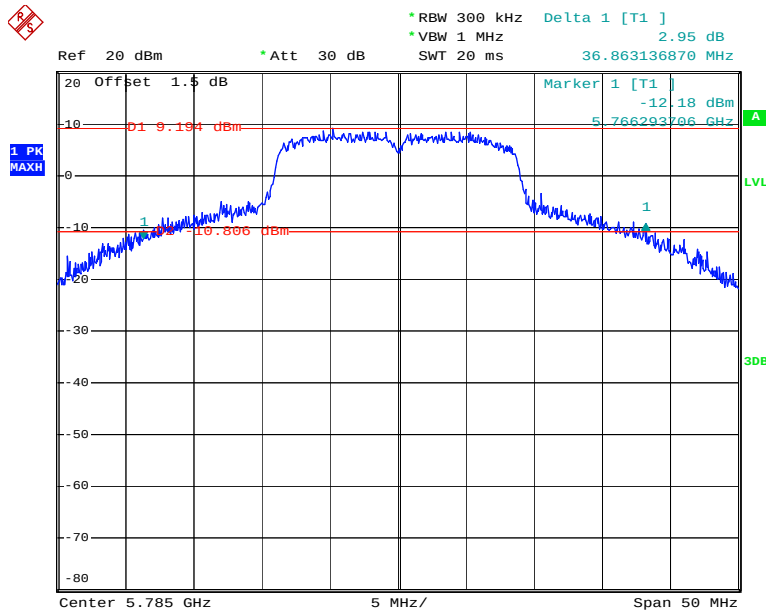


Date: 12.MAY.2014 16:26:25

Chain 0:802.11n ht20 RF Output Power, High Channel

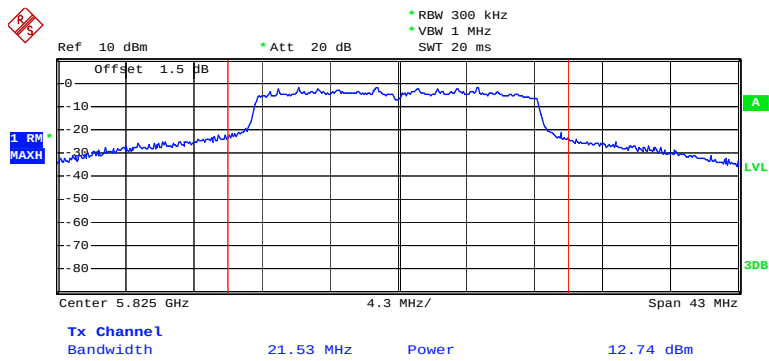


Date: 7.MAY.2014 11:08:47

Chain 0:802.11n ht20 OBW, High Channel

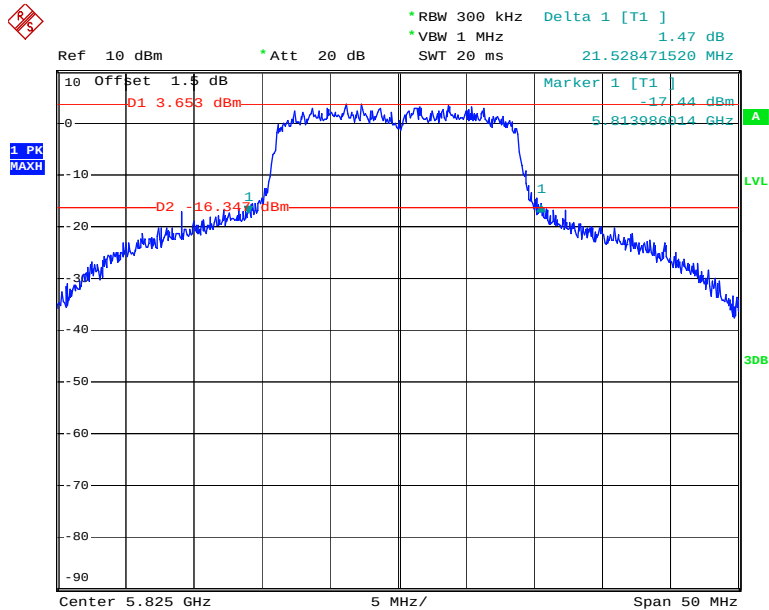


Date: 7.MAY.2014 11:08:37

Chain 1:802.11n ht20 RF Output Power, Low Channel

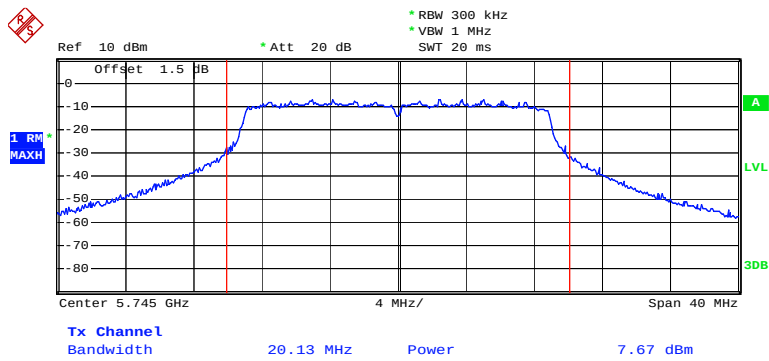


Date: 7.MAY.2014 10:55:23

Chain 1:802.11n ht20 OBW, Low Channel

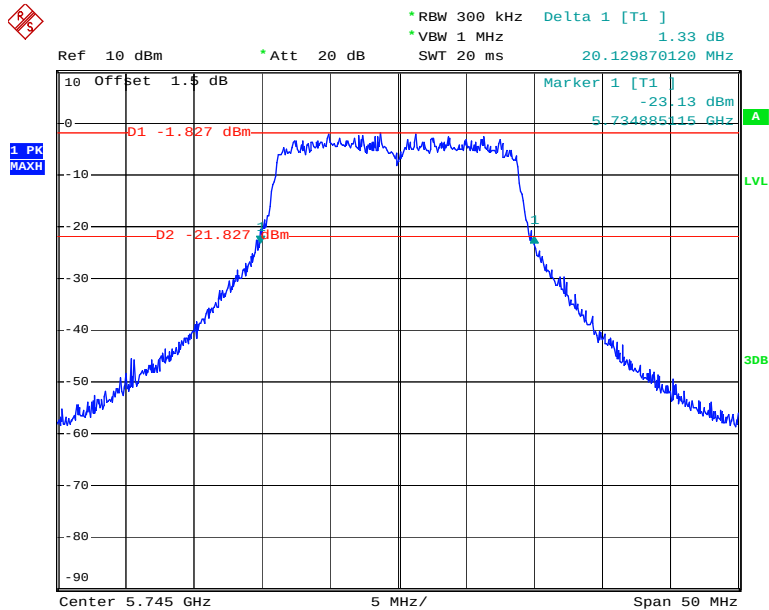


Date: 7.MAY.2014 10:55:03

Chain 1:802.11n ht20 RF Output Power, Middle Channel

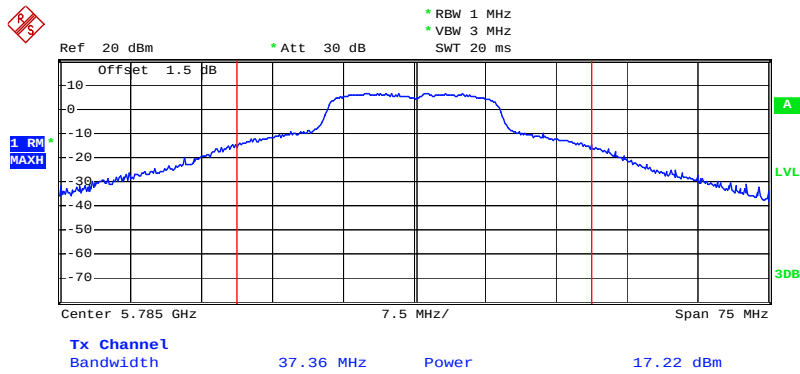


Date: 12.MAY.2014 16:28:20

Chain 1:802.11n ht20 OBW, Middle Channel

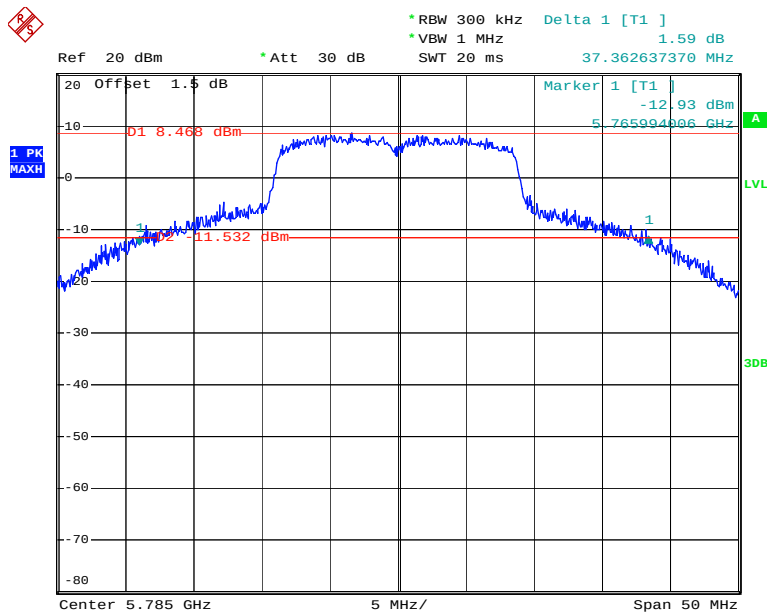


Date: 12.MAY.2014 16:28:11

Chain 1:802.11n ht20 RF Output Power, High Channel

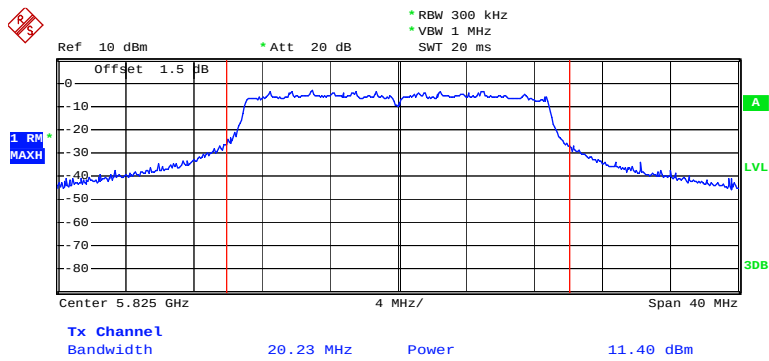


Date: 7.MAY.2014 11:06:36

Chain 1:802.11n ht20 OBW, High Channel

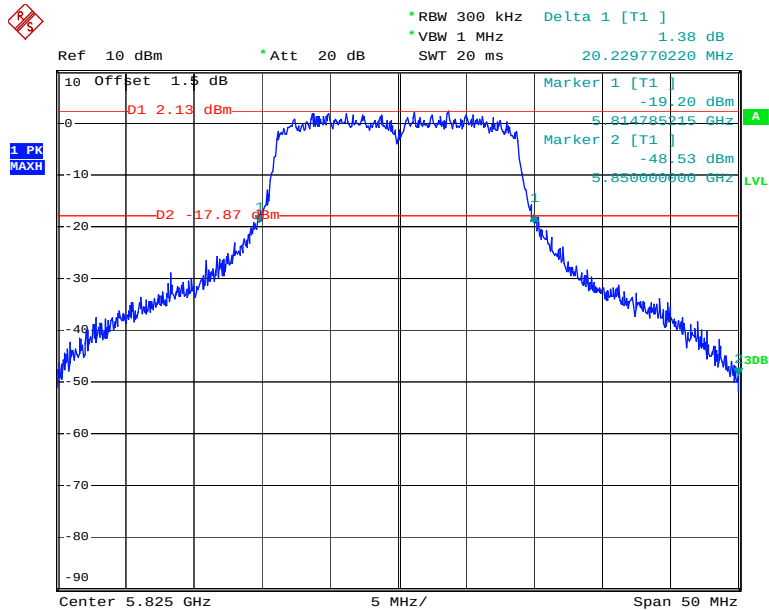


Date: 7.MAY.2014 11:06:21

Chain 0:802.11n ht40 RF Output Power, Low Channel

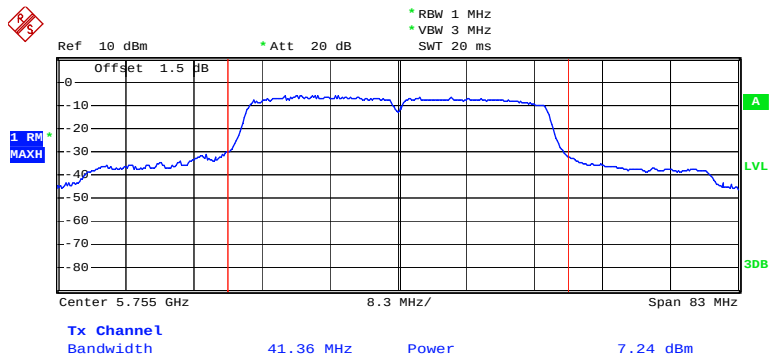


Date: 7.MAY.2014 11:11:56

Chain 0:802.11n ht40 OBW, Low Channel

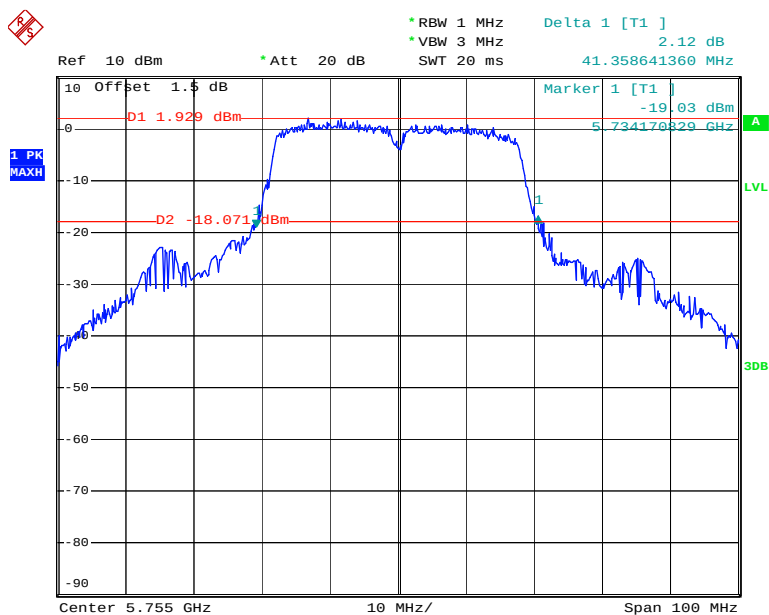


Date: 7.MAY.2014 11:11:40

Chain 0:802.11n ht40 RF Output Power, High Channel

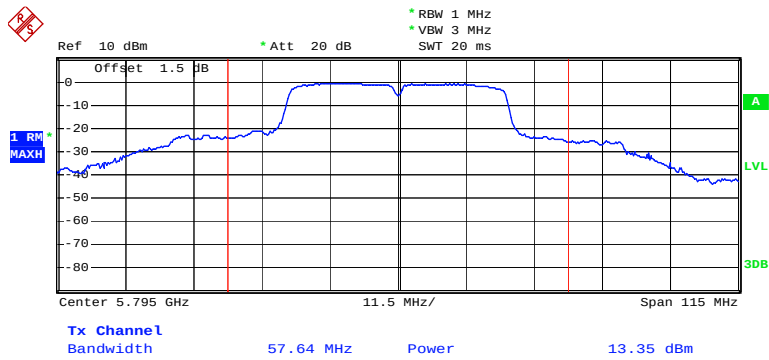


Date: 13.MAY.2014 16:50:29


Chain 0:802.11n ht40 OBW, High Channel

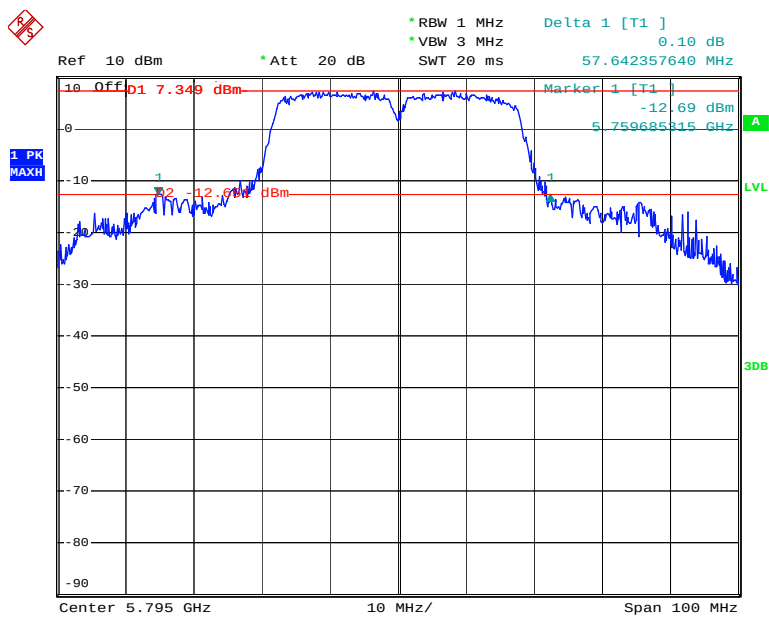

Date: 13.MAY.2014 16:50:11

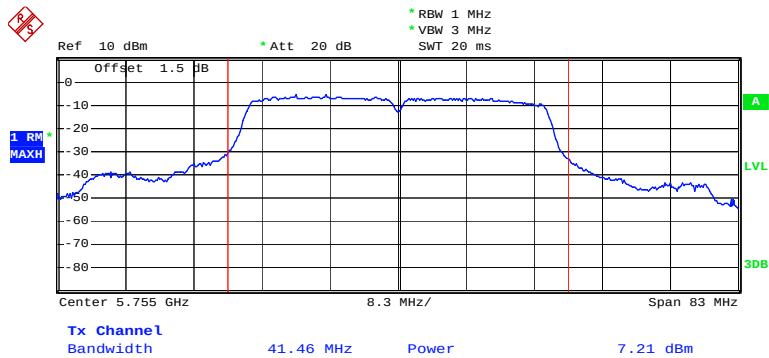
Chain 1:802.11n ht40 RF Output Power, Low Channel

Date: 13.MAY.2014 10:06:27

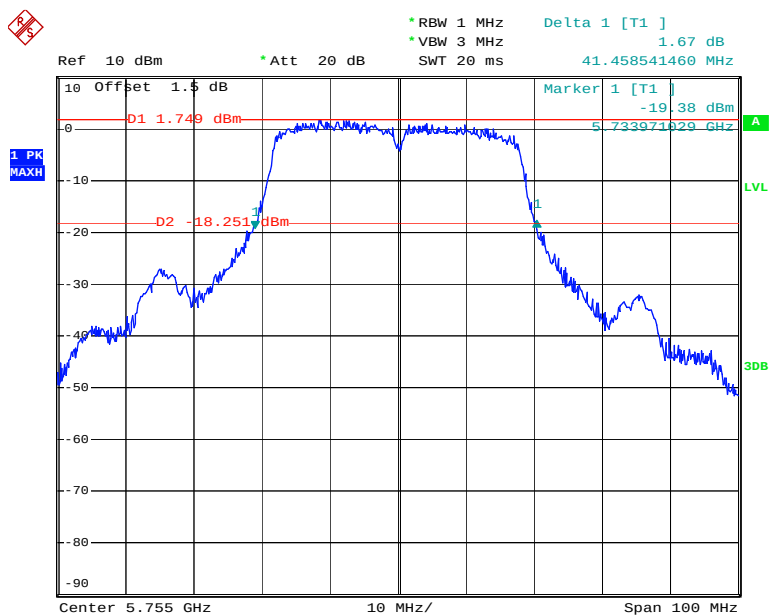Chain 1:802.11n ht40 OBW, Low Channel


Date: 13.MAY.2014 10:06:11

Chain 1:802.11n ht40 RF Output Power, High Channel

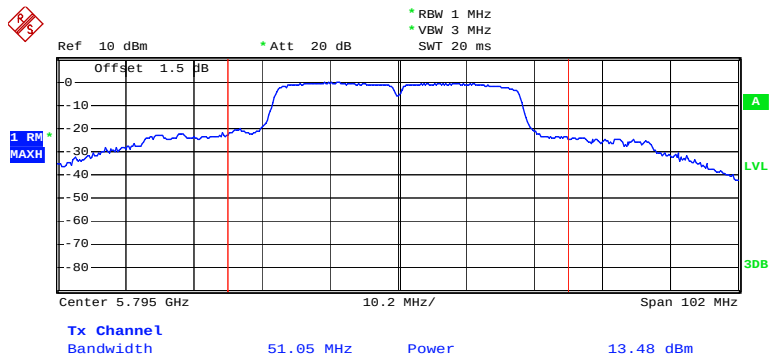

Date: 13.MAY.2014 16:48:09

Chain 1:802.11n ht40 OBW, High Channel

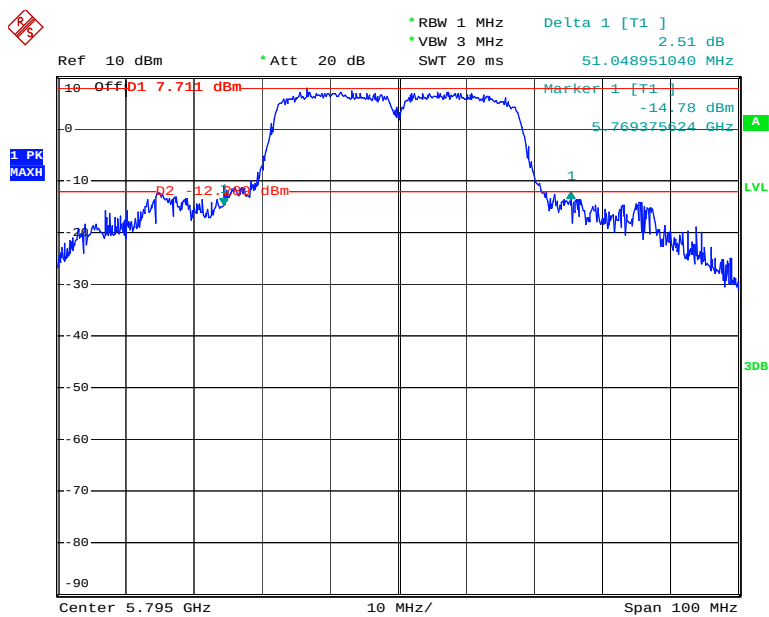

Date: 13.MAY.2014 16:47:48

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.2~26.5 °C
Relative Humidity:	61~68 %
ATM Pressure:	100~100.9 kPa

The testing was performed by Dean Liu from 2014-04-30 to 2014-05-13.


Test Result: *Compliance*

Test mode: *Transmitting*

Please refer to following plots.


2.4GHz band:

Chain 0: 802.11b: Band Edge, Left Side

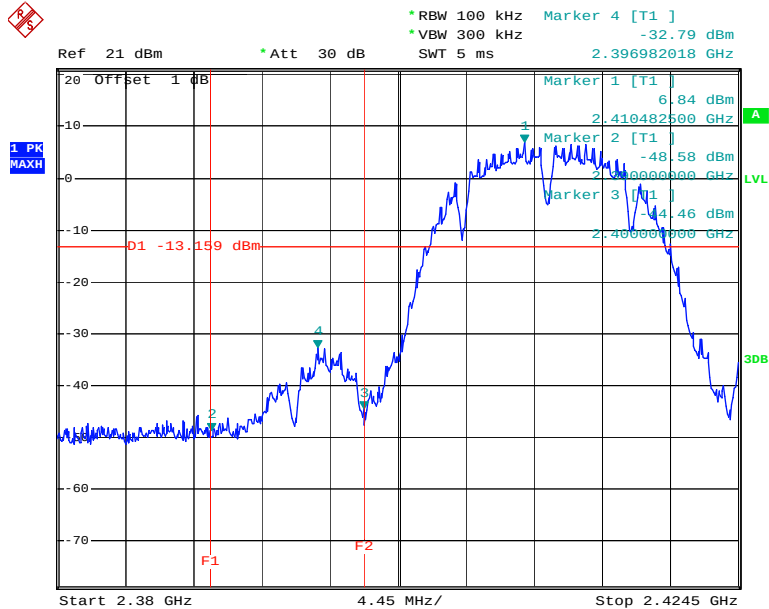


Date: 30.APR.2014 13:28:10


Chain 0: 802.11b: Band Edge, Right Side

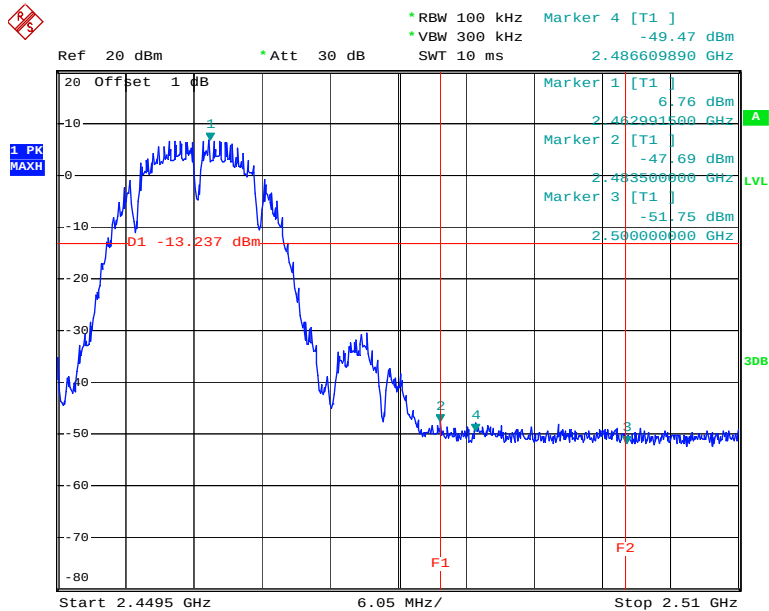

Date: 30.APR.2014 13:31:10

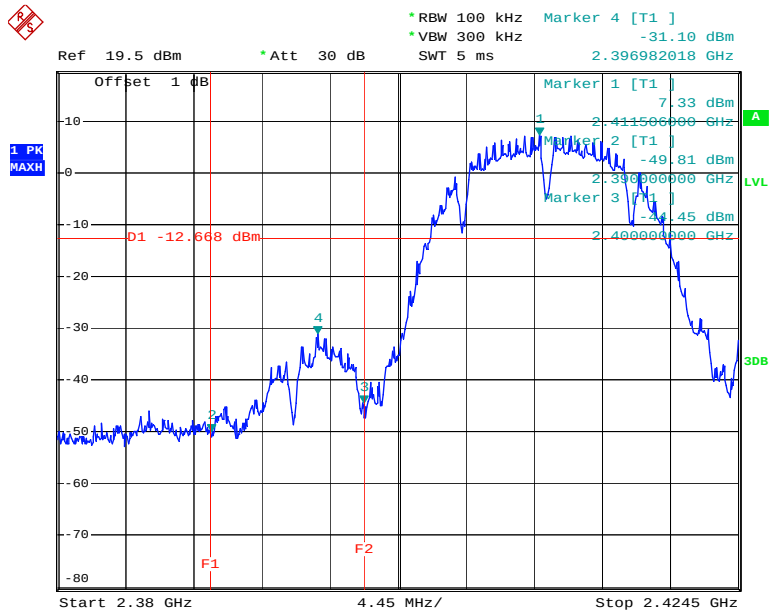
Chain 1: 802.11b: Band Edge, Left Side

Date: 9.MAY.2014 16:38:23

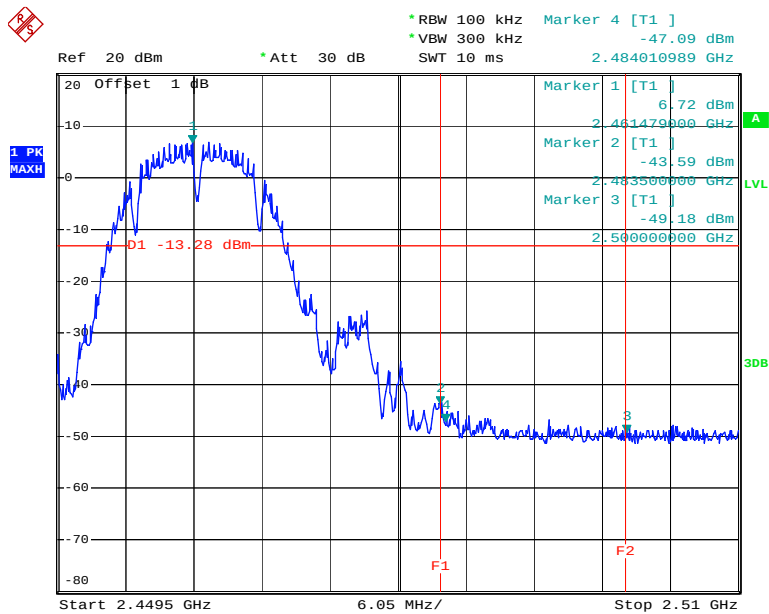Chain 1: 802.11b: Band Edge, Right Side


Date: 9.MAY.2014 16:41:59

Chain 0: 802.11g: Band Edge, Left Side

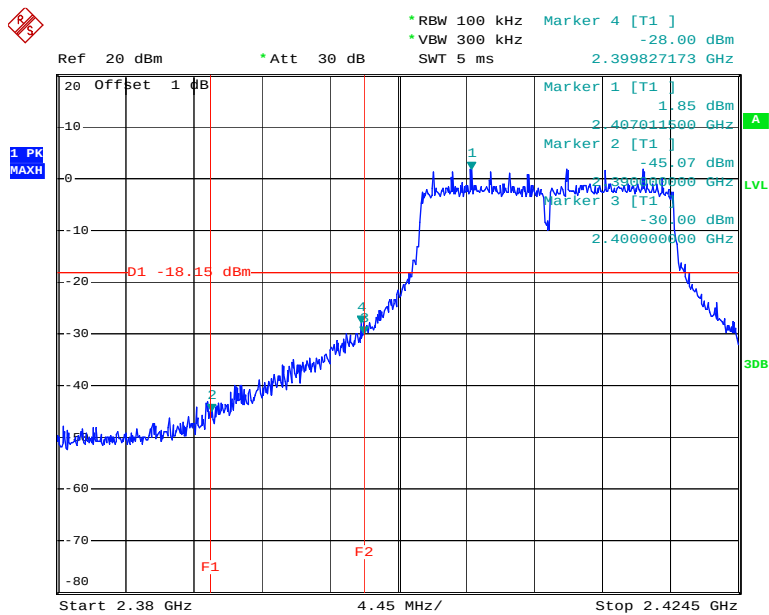

Date: 30.APR.2014 13:36:13

Chain 0: 802.11g: Band Edge, Right Side

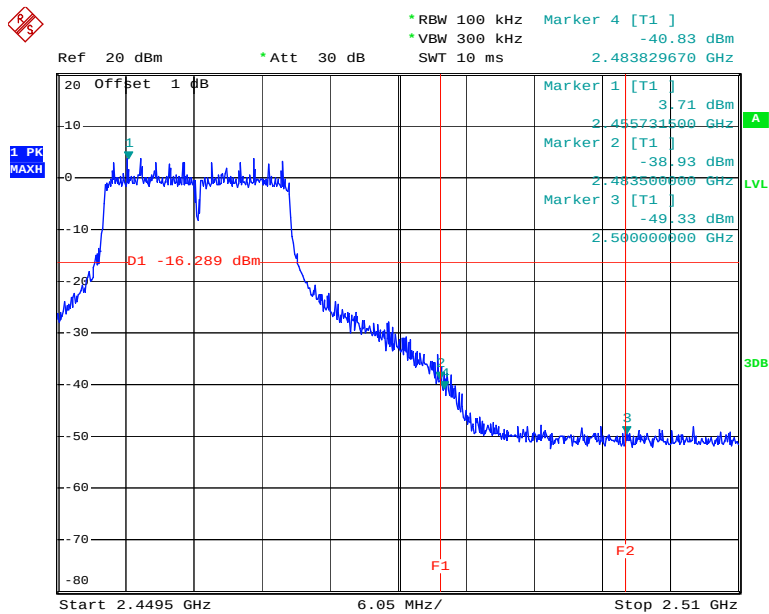

Date: 30.APR.2014 13:40:16

1 PK MAXH

Ref 20 dBm Att 30 dB SWT 5 ms

Marker 4 [T1] 2.19 dBm 2.417024000 GHz

Marker 2 [T1] -44.62 dBm 2.417024000 GHz


Marker 3 [T1] -30.10 dBm 2.400000000 GHz

D1 -17.811 dBm

F1 F2


Start 2.38 GHz 4.45 MHz/ Stop 2.4245 GHz

Chain 1: 802.11g: Band Edge, Right Side

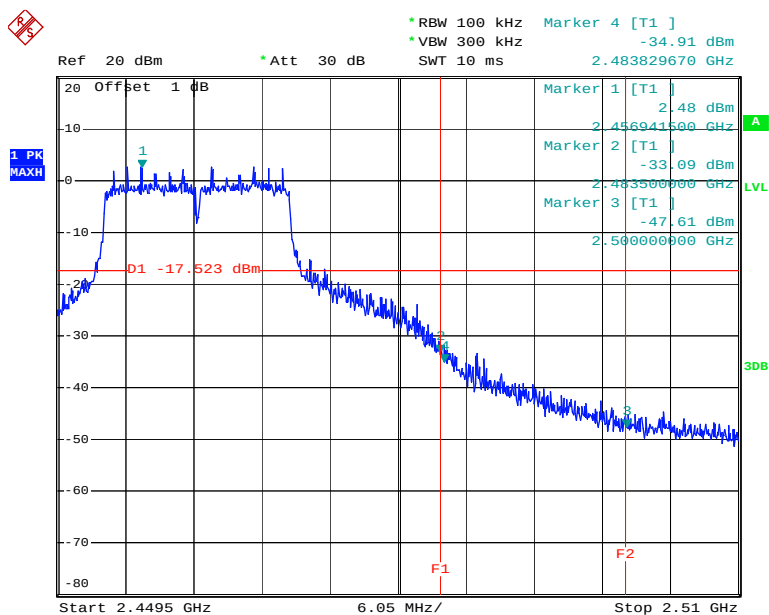


Page 126 of 158

Chain 0: 802.11n ht20 Band Edge, Left Side

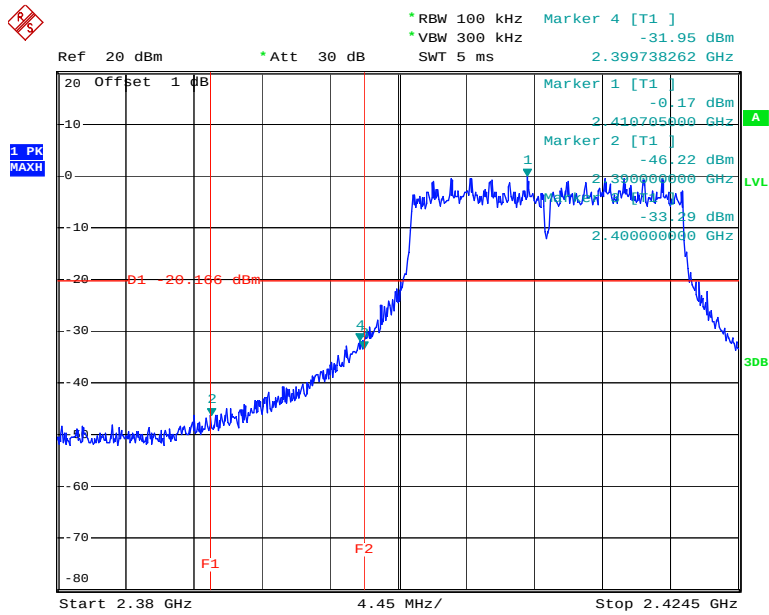

Date: 30.APR.2014 13:42:49

Chain 0: 802.11n ht20 Band Edge, Right Side

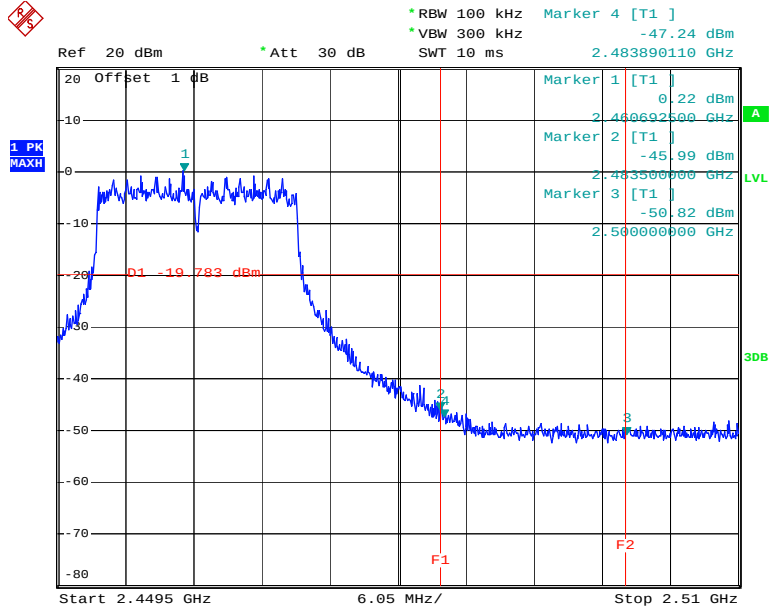

Date: 30.APR.2014 13:49:53

1 PK
MAXH

Ref 20 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 5 ms


Marker 4 [T1] 1.00 dBm 4.19471500 GHz
Marker 2 [T1] -43.10 dBm 2.39900000 GHz
Marker 3 [T1] -31.63 dBm 2.40000000 GHz

D1 -19.062 dBm

F1 F2

Start 2.38 GHz 4.45 MHz/ Stop 2.4245 GHz

Chain 1: 802.11n ht20 Band Edge, Right Side

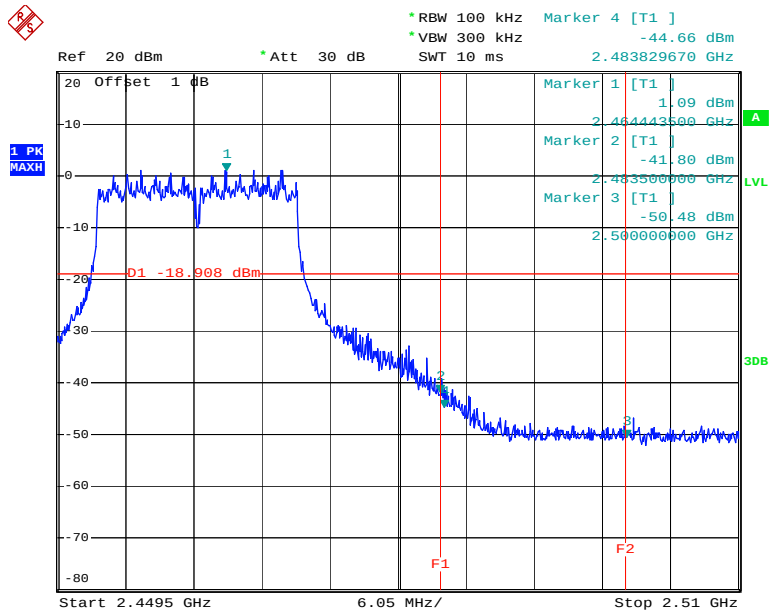

Page 128 of 158

* RBW 100 kHz
 * VBW 300 kHz
 SWT 10 ms

Marker 4 [T1]
 -34.62 dBm
 2.399611389 GHz

Ref 21 dBm
 Att 30 dB

20 Offset 1 dB

Marker 1 [T1]
 -2.77 dBm
 2.430719000 GHz

Marker 2 [T1]
 -43.70 dBm
 2.390000000 GHz

Marker 3 [T1]
 -34.11 dBm
 2.400000000 GHz


D1 -22.774 dBm

F1 F2

Start 2.38 GHz
 6.7 MHz/
 Stop 2.447 GHz


1 PK MAXH

Chain 0: 802.11n ht40 Band Edge, Right Side

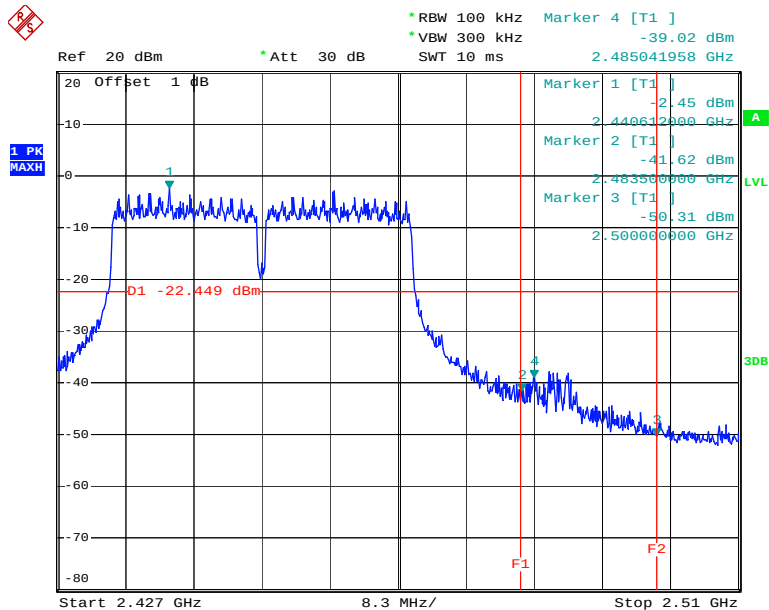


Page 129 of 158

Chain 1: 802.11n ht40 Band Edge, Left Side

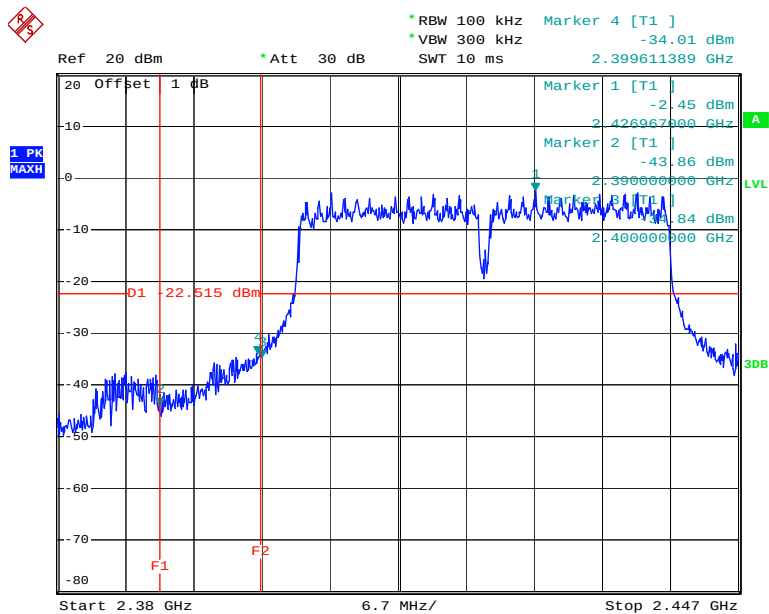


Date: 6.MAY.2014 10:21:43


Chain 1: 802.11n ht40 Band Edge, Right Side

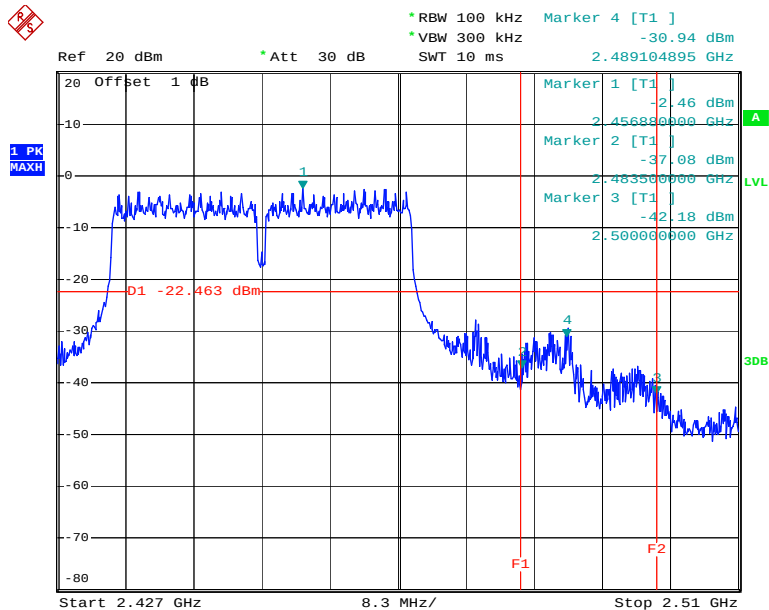

Date: 6.MAY.2014 10:32:40

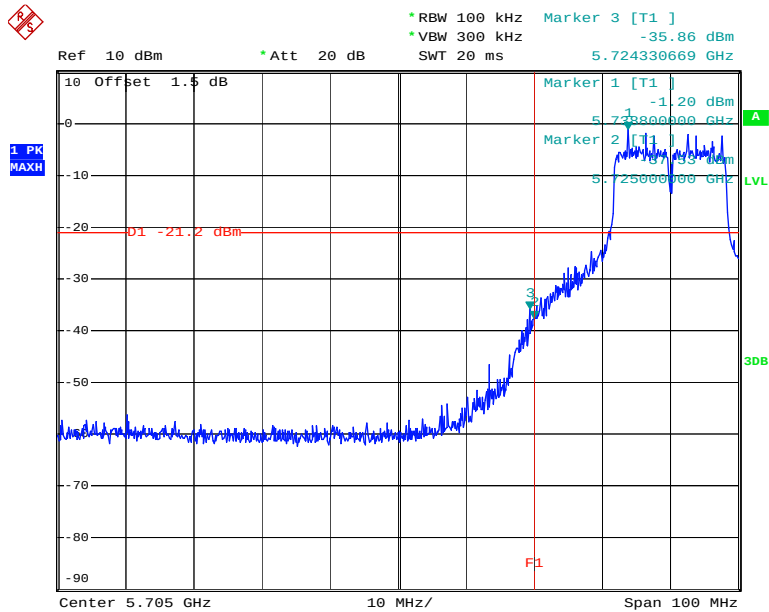
5725-5850MHz band:**Chain 0: 802.11a Band Edge, Left Side**

Date: 7.MAY.2014 10:47:16

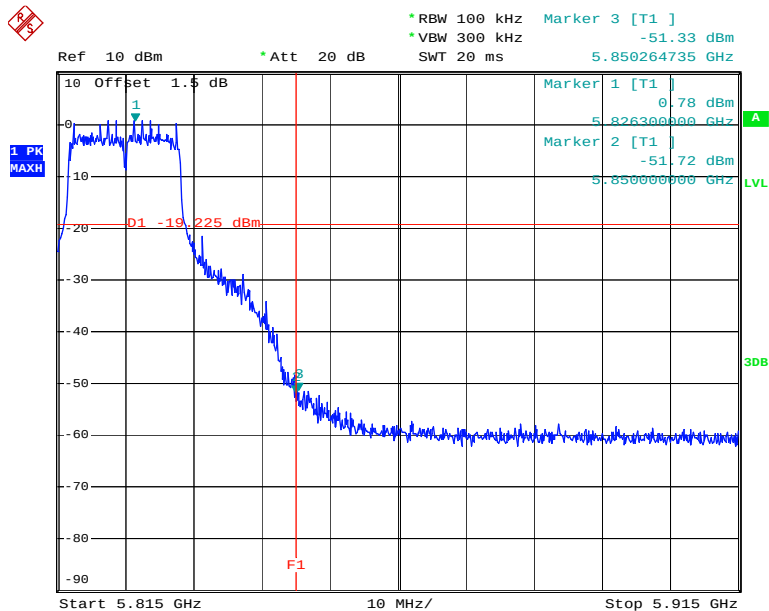Chain 0: 802.11a Band Edge, Right Side


Date: 7.MAY.2014 10:52:50

Chain 1: 802.11a Band Edge, Left Side

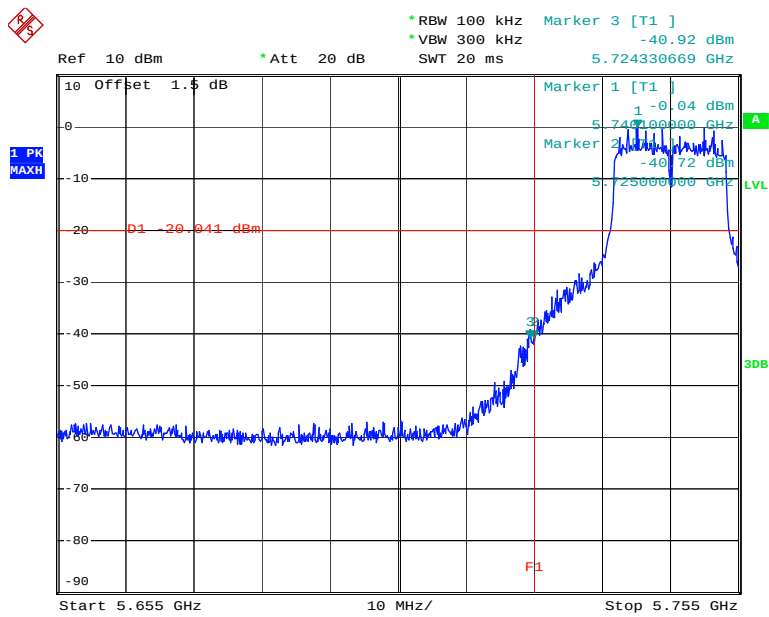


Date: 9.MAY.2014 16:34:10

Chain 1: 802.11a Band Edge, Right Side

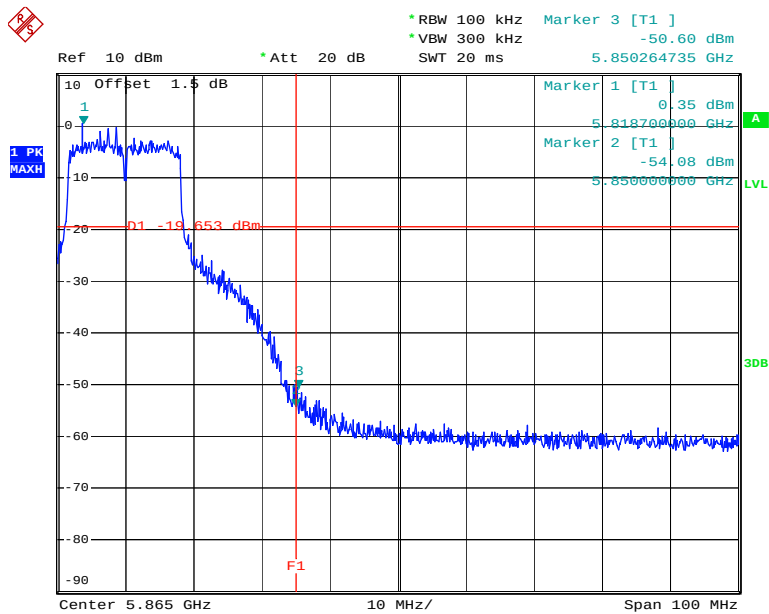


Date: 9.MAY.2014 16:28:55

Chain 0: 802.11n ht20 Band Edge, Left Side

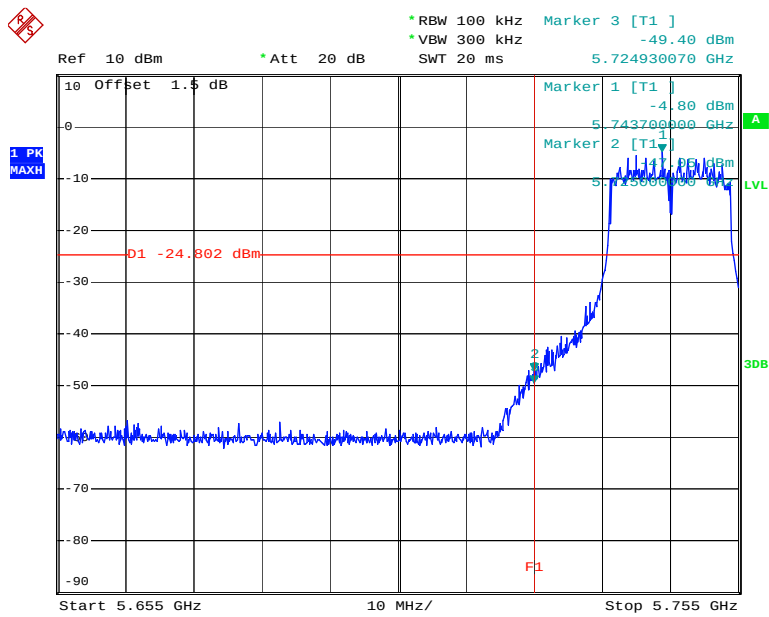


Date: 7.MAY.2014 11:00:25

Chain 0: 802.11n ht20 Band Edge, Right Side

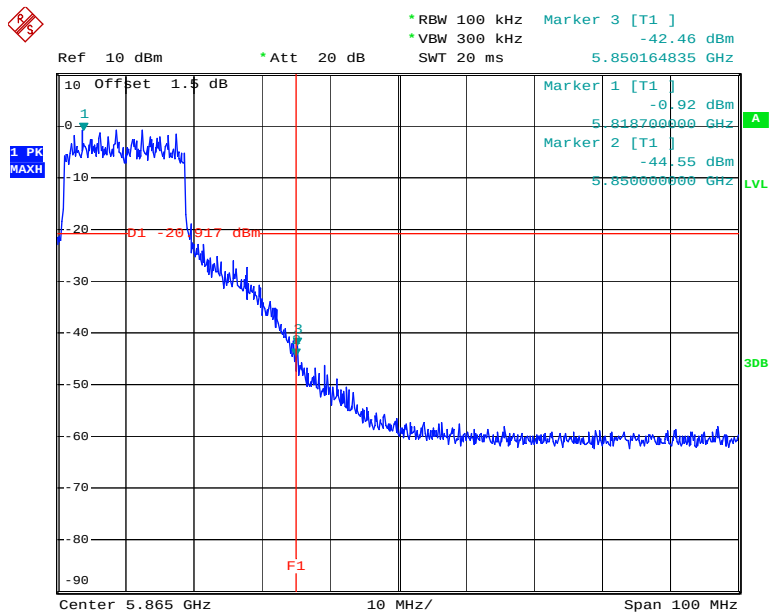


Date: 7.MAY.2014 11:09:48

Chain 1: 802.11n ht20 Band Edge, Left Side

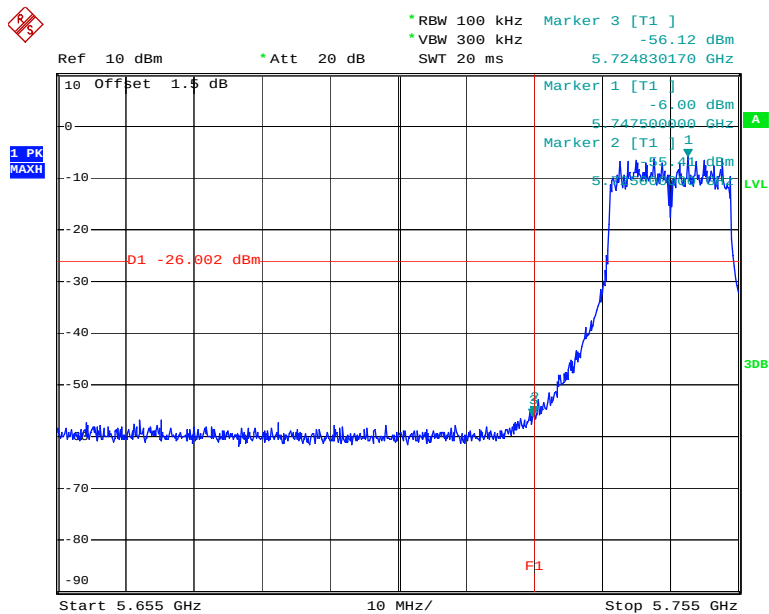


Date: 7.MAY.2014 10:56:32

Chain 1: 802.11n ht20 Band Edge, Right Side

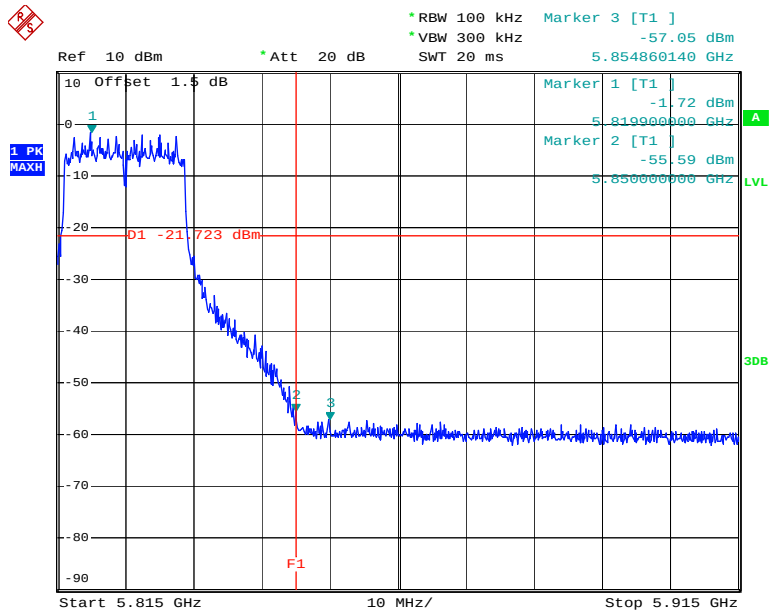


Date: 7.MAY.2014 11:07:45

Chain 0: 802.11n ht40 Band Edge, Left Side

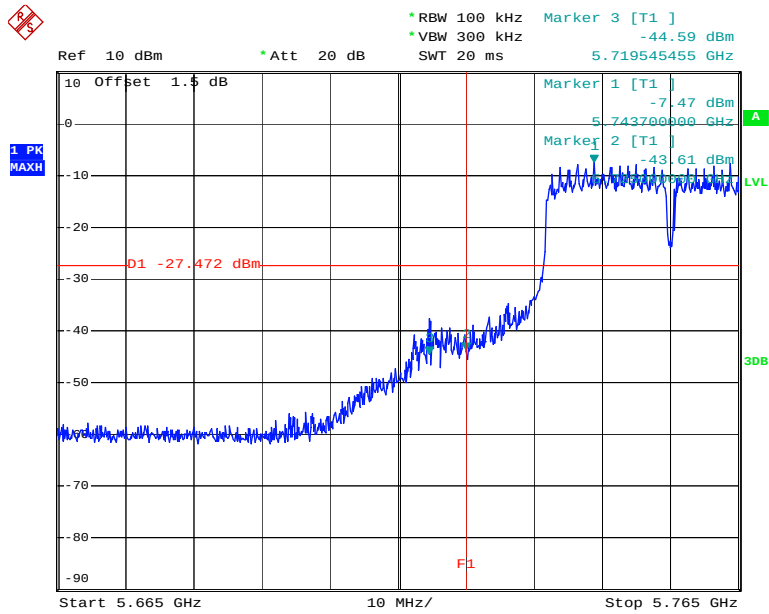


Date: 7.MAY.2014 11:13:21

Chain 0: 802.11n ht40 Band Edge, Right Side

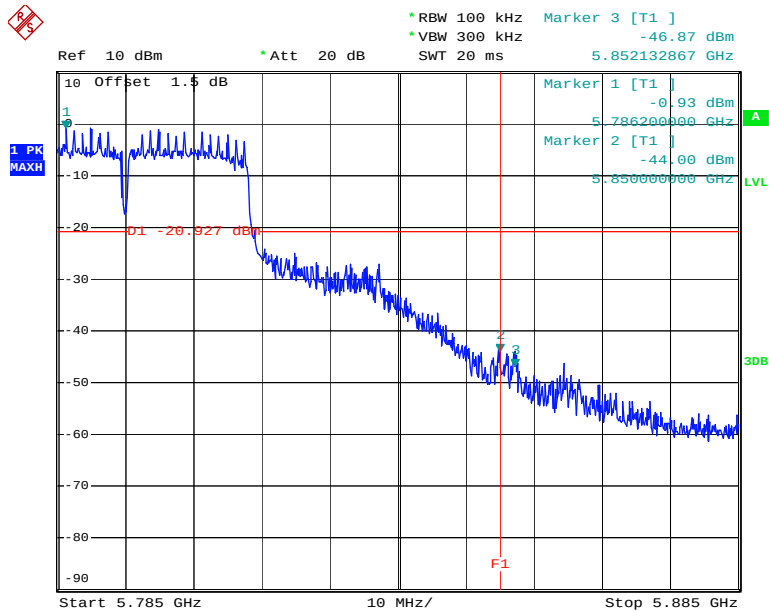


Date: 13.MAY.2014 16:51:53

Chain 1: 802.11n ht40 Band Edge, Left Side

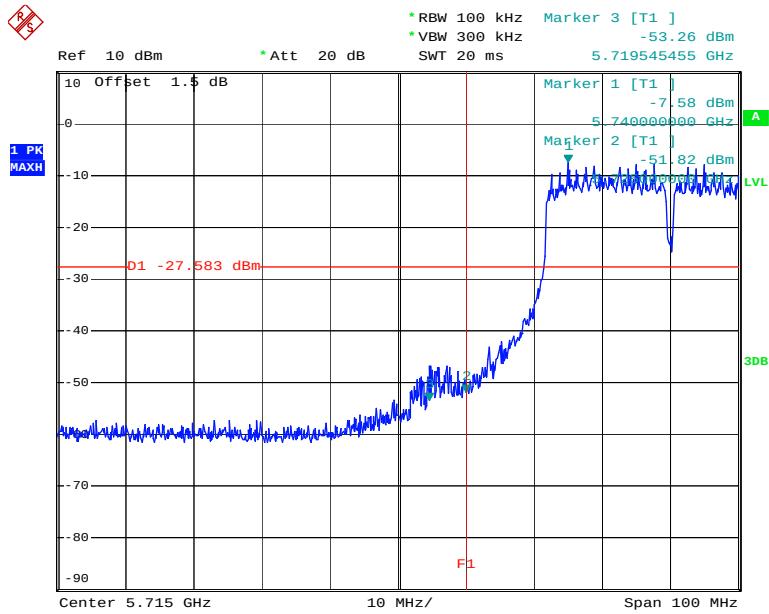

Date: 7.MAY.2014 11:16:06

Chain 1: 802.11n ht40 Band Edge, Right Side

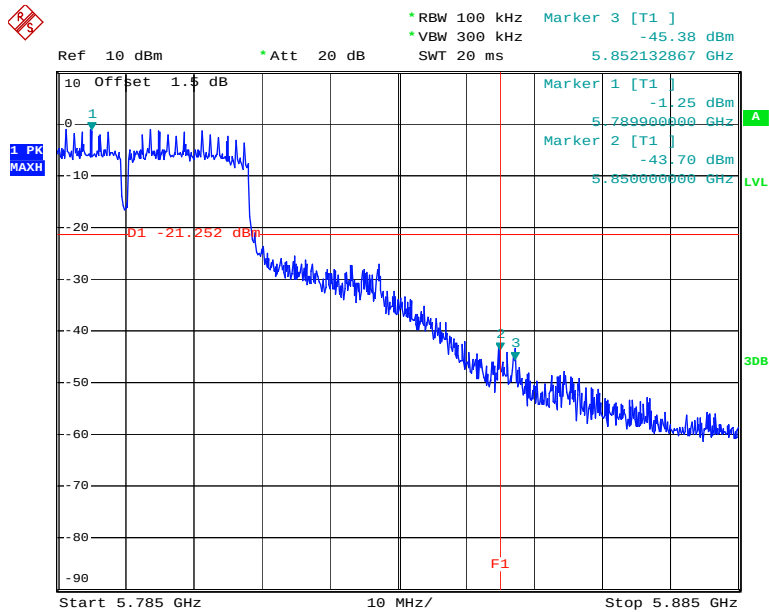

Date: 13.MAY.2014 16:49:35

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r01clause10.2:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	24.2~26.5 °C
Relative Humidity:	61~68 %
ATM Pressure:	100~100.9 kPa

The testing was performed by Dean Liu from 2014-04-30 to 2014-05-13.


*Test Mode: Transmitting***Test Result: Pass**

Test mode	Channel	PSD (dBm/3kHz)			Limit (dBm/3kHz)	Result
		Chain0	Chain1	Chain0+1		
2.4GHz band- 802.11b	Low	-7.59	-6.54	/	≤ 8	PASS
	Middle	-6.38	-5.86	/	≤ 8	PASS
	High	-7.57	-8.13	/	≤ 8	PASS
2.4GHz band- 802.11g	Low	-13.10	-12.64	/	≤ 8	PASS
	Middle	-7.91	-7.95	/	≤ 8	PASS
	High	-9.69	-11.11	/	≤ 8	PASS
2.4GHz band- 802.11n ht20	Low	-14.44	-13.60	-10.99	≤ 8	PASS
	Middle	-7.49	-7.90	-4.68	≤ 8	PASS
	High	-16.21	-12.21	-10.75	≤ 8	PASS
2.4GHz band- 802.11n ht40	Low	-18.94	-17.33	-15.05	≤ 8	PASS
	Middle	-10.66	-10.99	-7.81	≤ 8	PASS
	High	-17.43	-17.11	-14.26	≤ 8	PASS
5725-5850MHz band-802.11a	Low	-15.37	-13.31	-15.37	≤ 8	PASS
	Middle	-8.24	-9.41	-8.24	≤ 8	PASS
	High	-10.76	-13.10	-10.76	≤ 8	PASS
5725-5850MHz band- 802.11n ht20	Low	-19.09	-18.63	-15.84	≤ 8	PASS
	Middle	-9.13	-8.91	-6.01	≤ 8	PASS
	High	-14.50	-16.02	-12.18	≤ 8	PASS
5725-5850MHz band-802.11n ht40	Low	-22.00	-22.83	-19.38	≤ 8	PASS
	High	-14.88	-15.09	-11.97	≤ 8	PASS

Please refer to the following plots

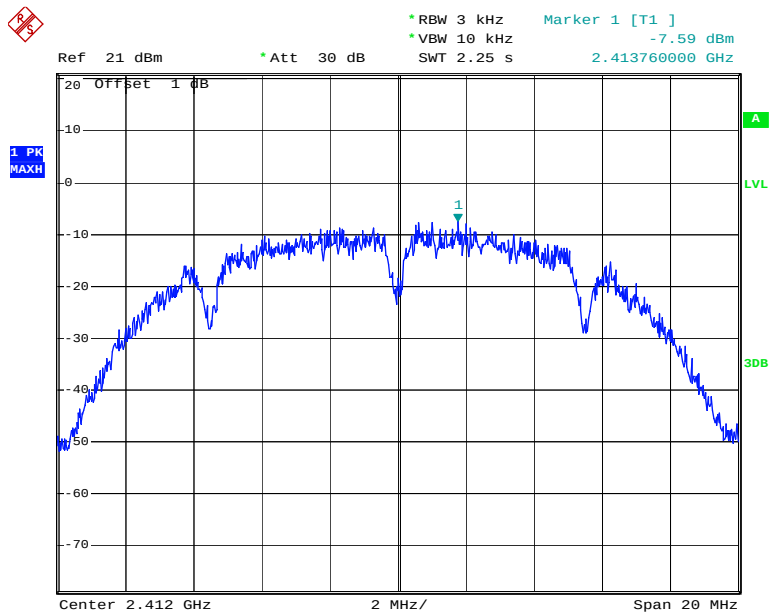
2.4GHz band:**Chain 0: Power Spectral Density, 802.11b Low Channel**

Date: 30.APR.2014 13:27:45

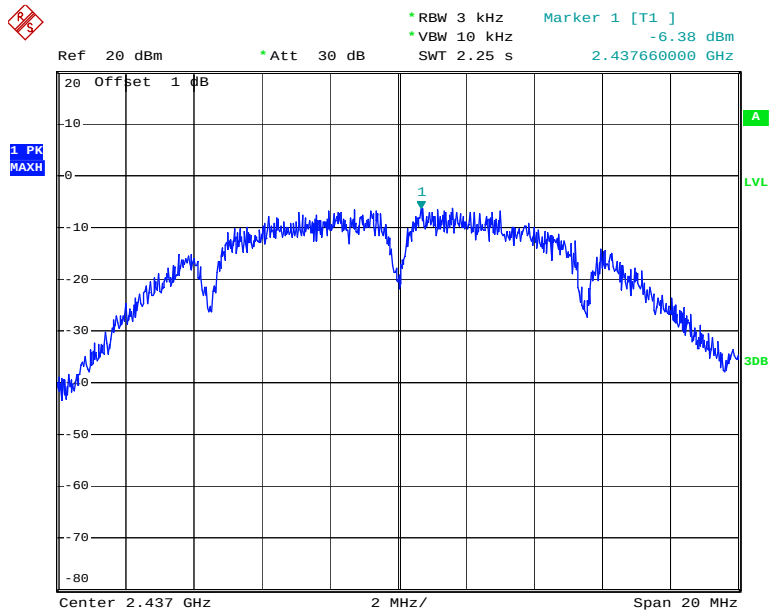Chain 0: Power Spectral Density, 802.11b Middle Channel


Date: 12.MAY.2014 15:30:39

Chain 0: Power Spectral Density, 802.11b High Channel

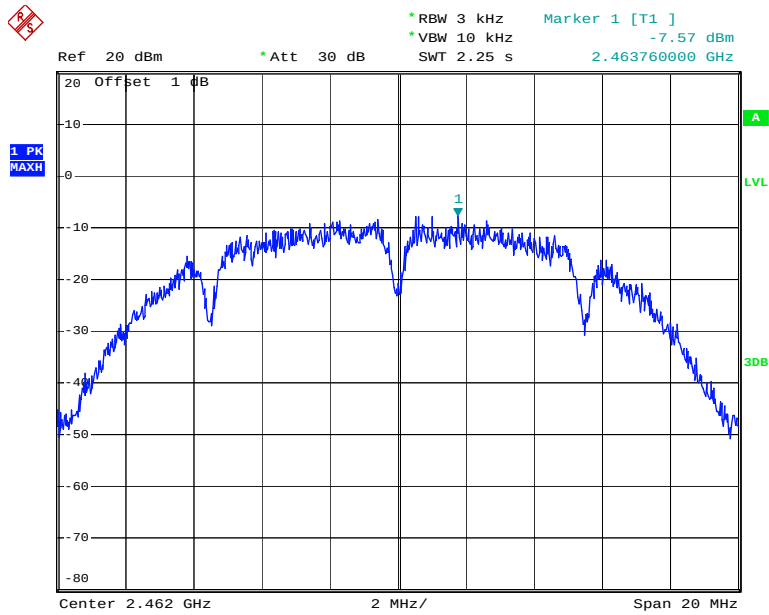


Date: 30.APR.2014 13:30:46


Chain 1: Power Spectral Density, 802.11b Low Channel

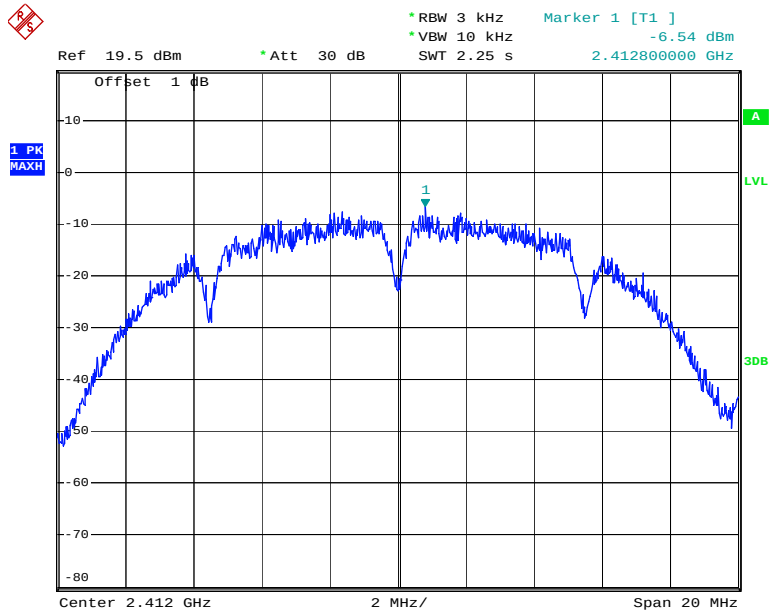

Date: 9.MAY.2014 16:37:58

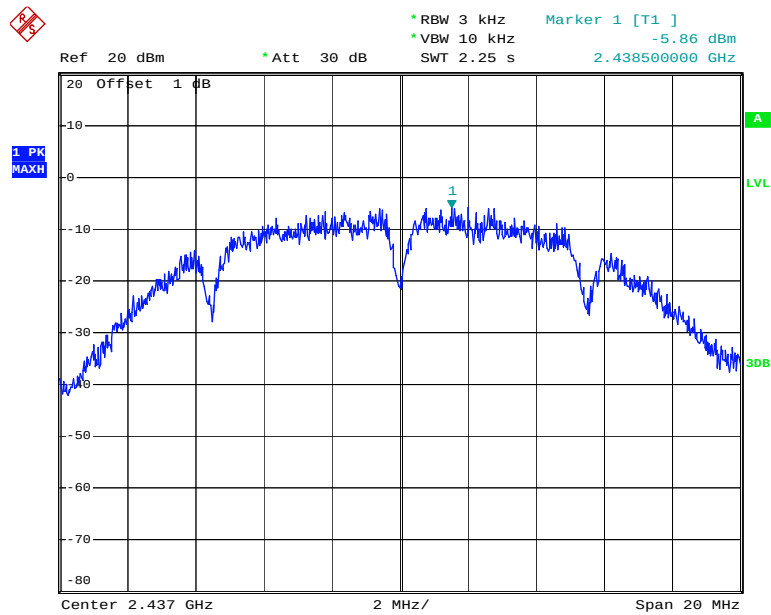
Chain 1: Power Spectral Density, 802.11b Middle Channel

Date: 12.MAY.2014 15:27:15

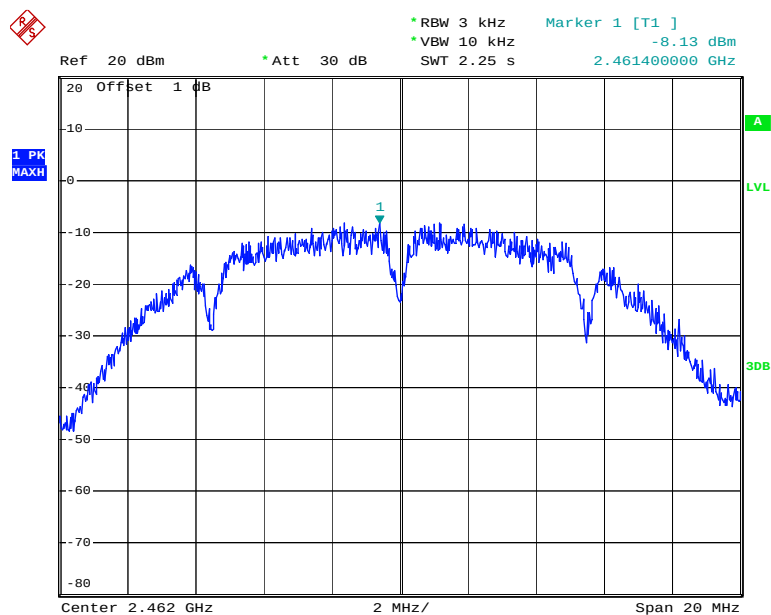Chain 1: Power Spectral Density, 802.11b High Channel


Date: 9.MAY.2014 16:41:34

Chain 0: Power Spectral Density, 802.11g Low Channel

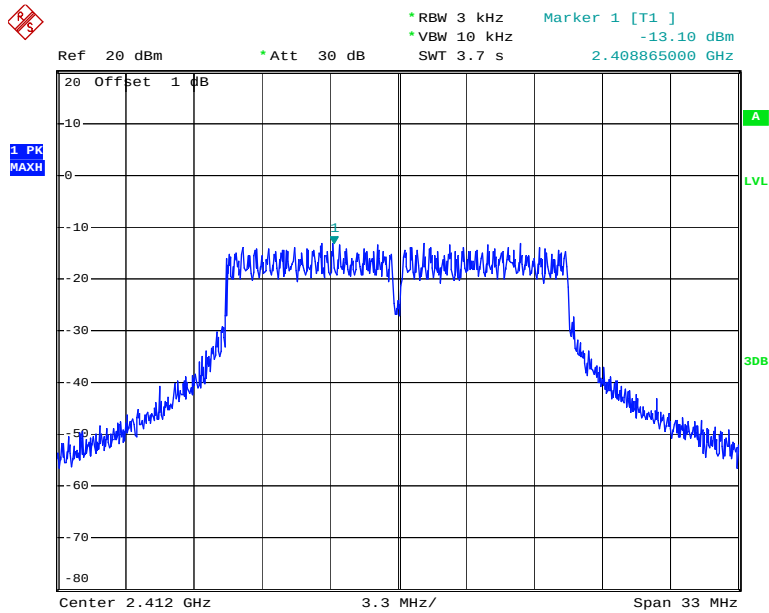


Date: 30.APR.2014 13:35:48

Chain 0: Power Spectral Density, 802.11g Middle Channel

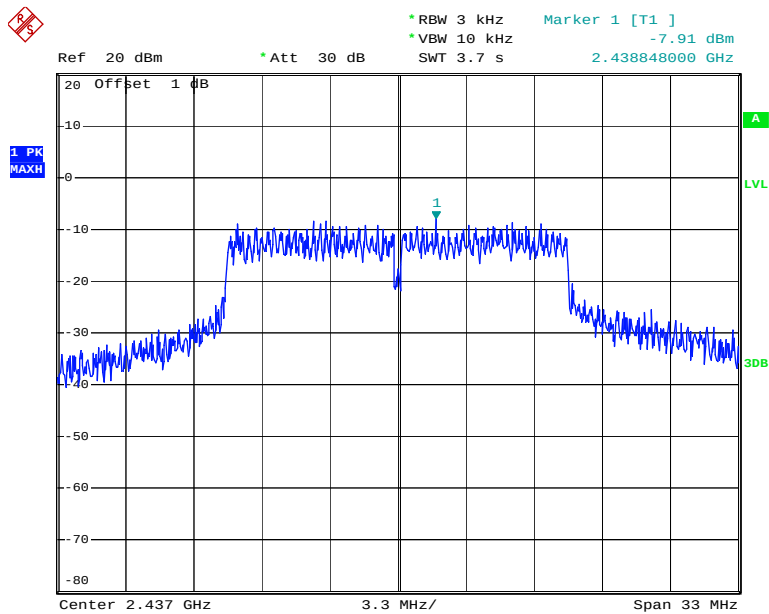


Date: 12.MAY.2014 15:33:09

Chain 0: Power Spectral Density, 802.11g High Channel

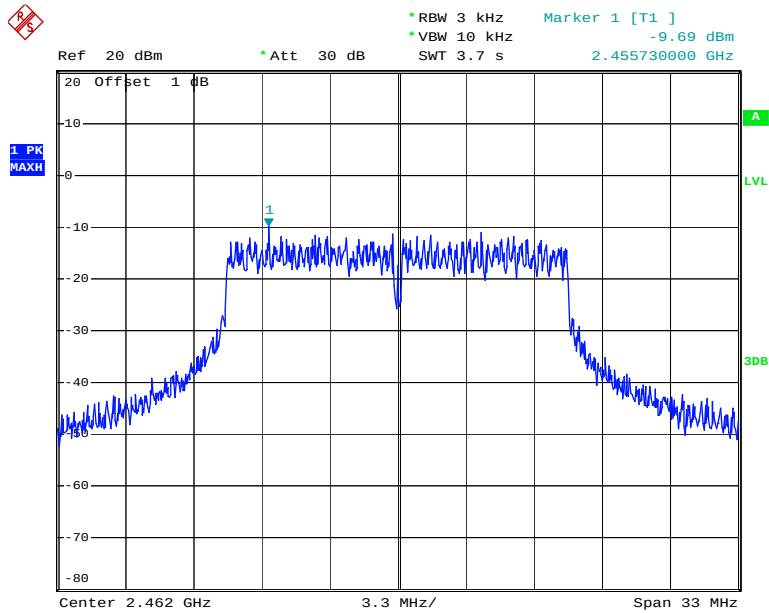


Date: 30.APR.2014 13:39:51

Chain 1: Power Spectral Density, 802.11g Low Channel

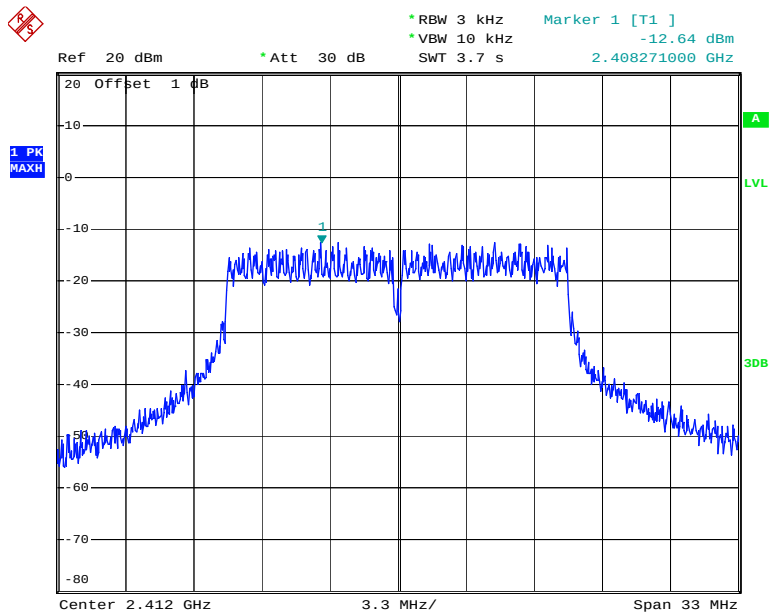


Date: 9.MAY.2014 16:47:33

Chain 1: Power Spectral Density, 802.11g Middle Channel

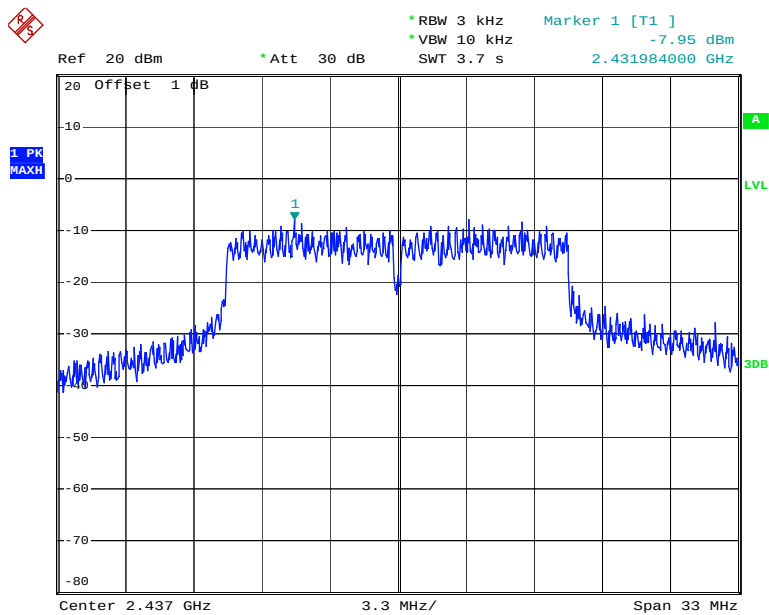


Date: 12.MAY.2014 15:36:47

Chain 1: Power Spectral Density, 802.11g High Channel

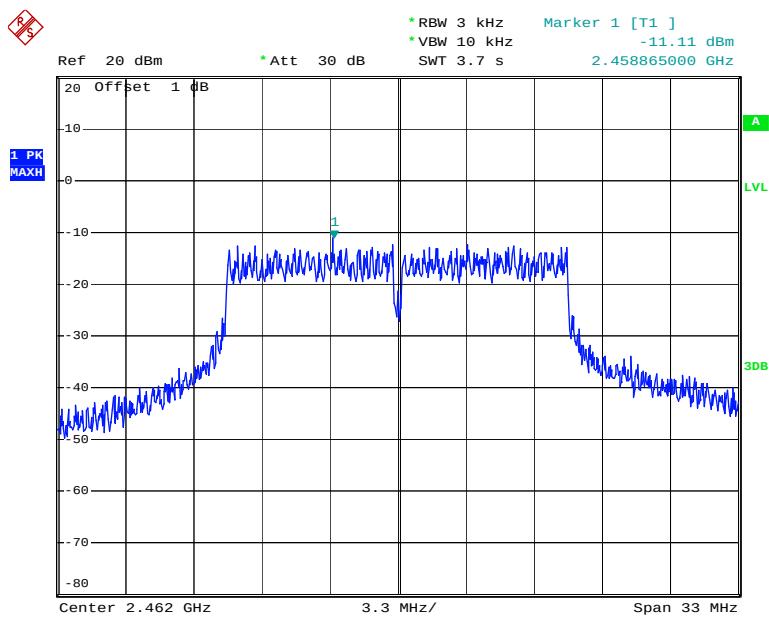


Date: 9.MAY.2014 16:43:53

Chain 0: Power Spectral Density, 802.11n ht20 Low Channel

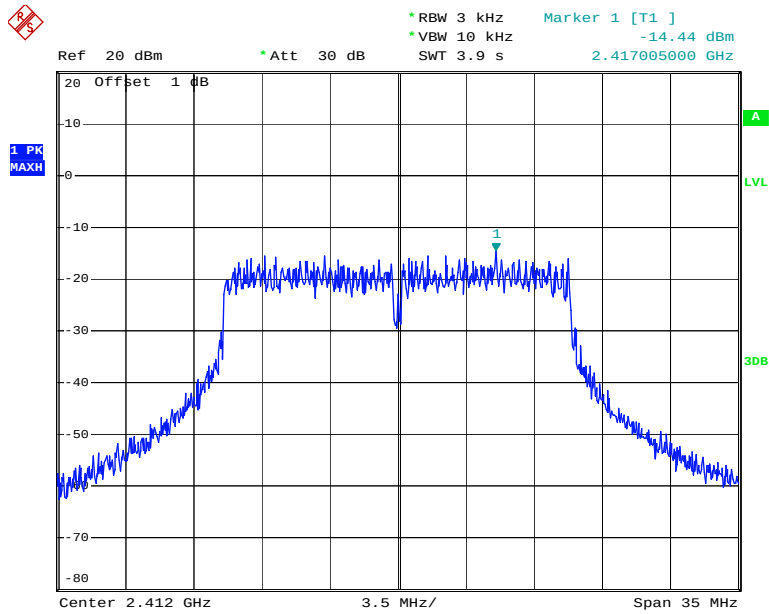


Date: 30.APR.2014 13:42:24

Chain 0: Power Spectral Density, 802.11n ht20 Middle Channel

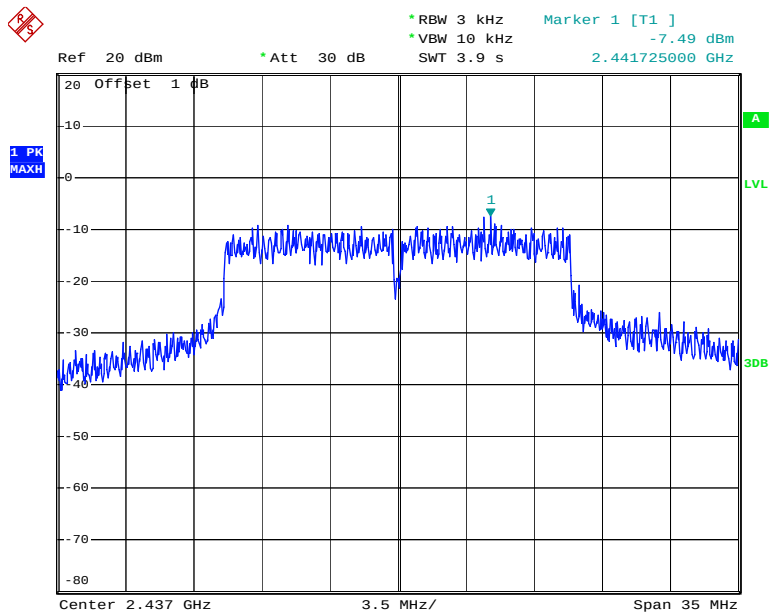


Date: 12.MAY.2014 16:01:52

Chain 0: Power Spectral Density, 802.11n ht20 High Channel

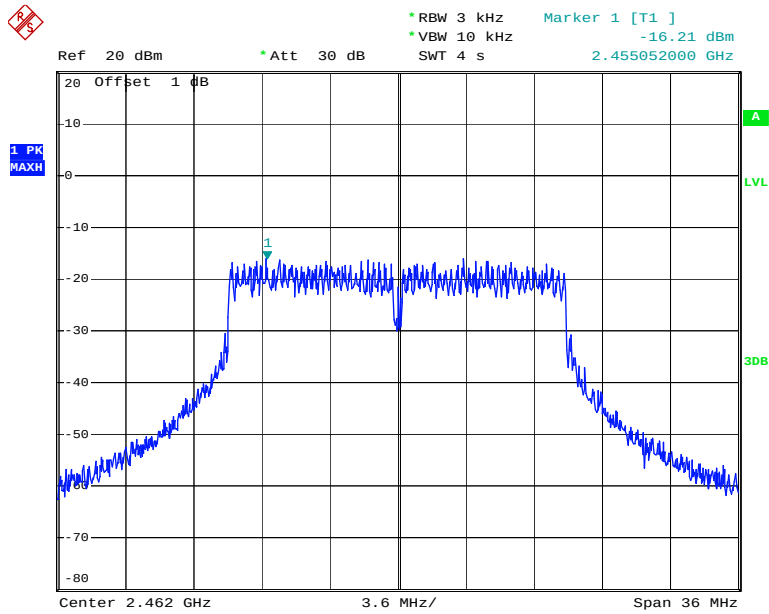


Date: 30.APR.2014 13:49:29

Chain 1: Power Spectral Density, 802.11n ht20 Low Channel

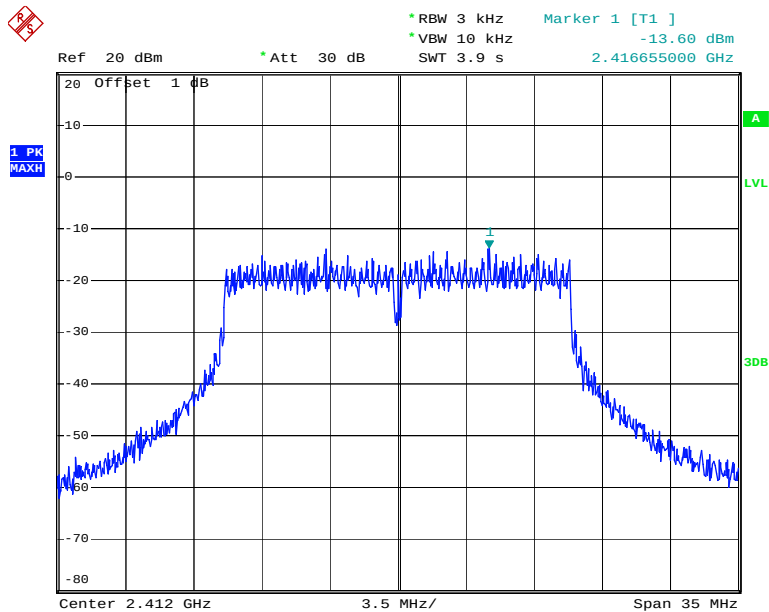


Date: 30.APR.2014 13:44:08

Chain 1: Power Spectral Density, 802.11n ht20 Middle Channel

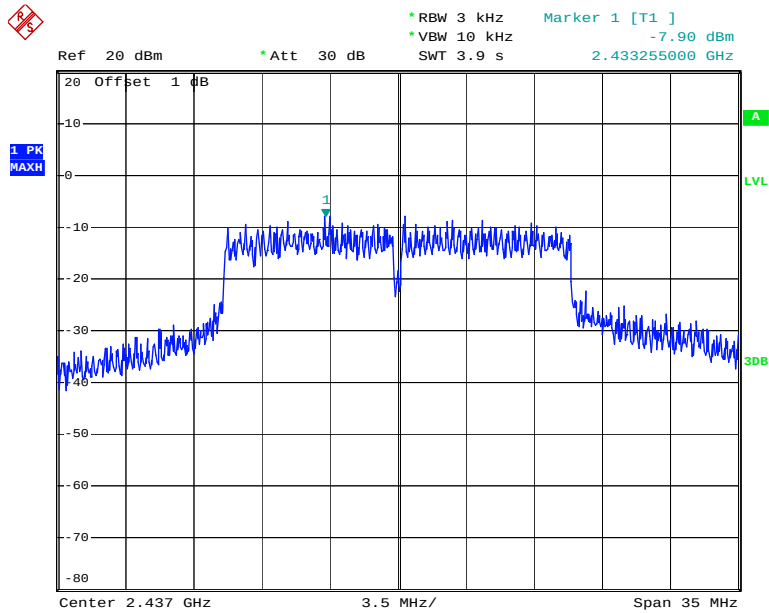


Date: 12.MAY.2014 16:06:40


Chain 1: Power Spectral Density, 802.11n ht20 High Channel

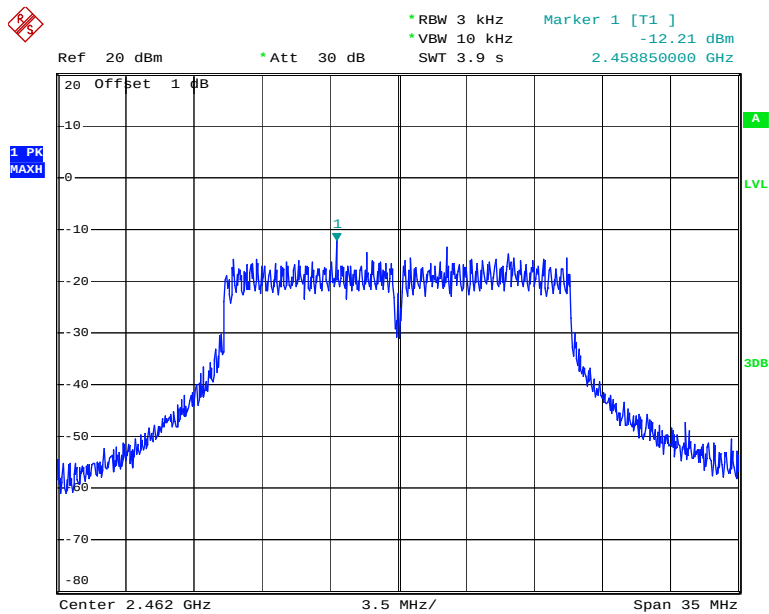


Date: 30.APR.2014 14:19:22

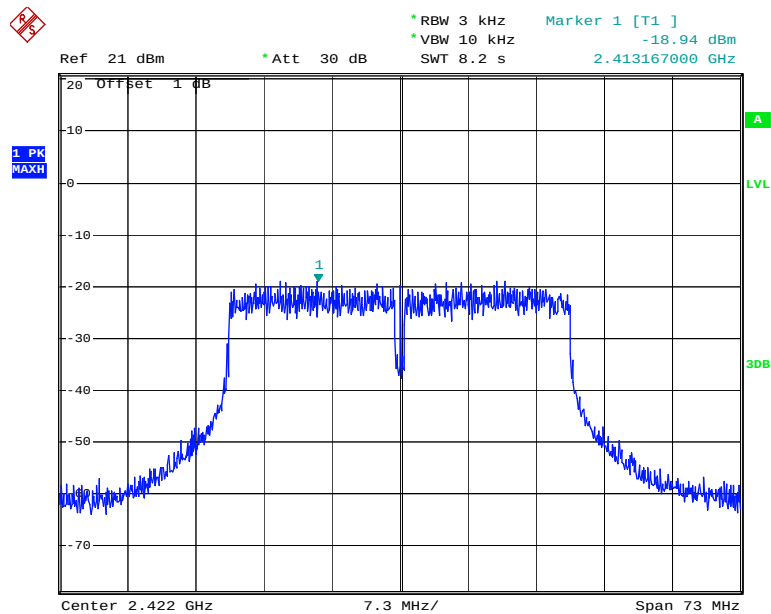Chain 0: Power Spectral Density, 802.11n ht40 Low Channel


Date: 6.MAY.2014 10:16:55

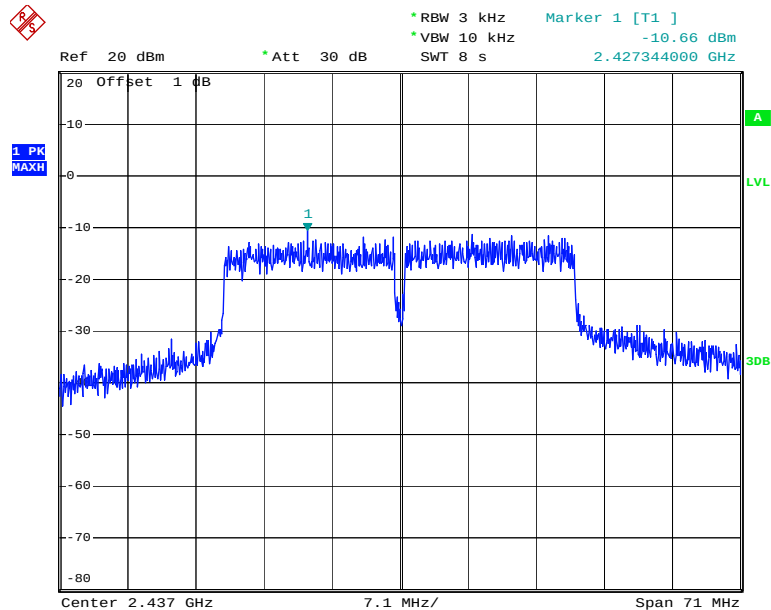Chain 0: Power Spectral Density, 802.11n ht40 Middle Channel


Date: 12.MAY.2014 16:10:03

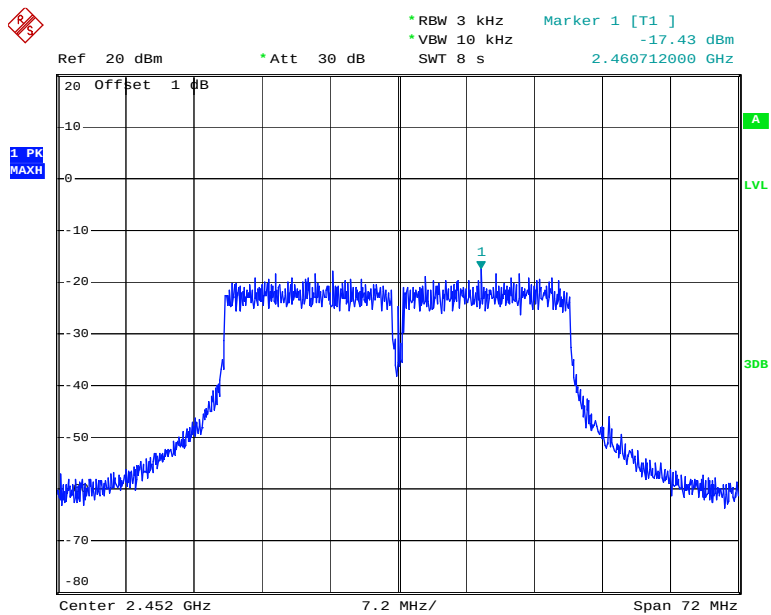Chain 0: Power Spectral Density, 802.11n ht40 High Channel


Date: 6.MAY.2014 10:30:15

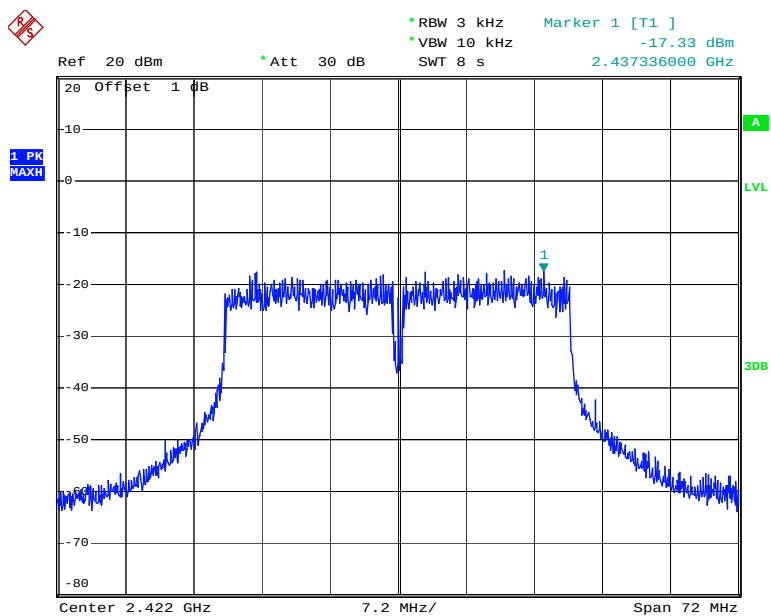Chain 1: Power Spectral Density, 802.11n ht40 Low Channel

Date: 6.MAY.2014 10:21:18

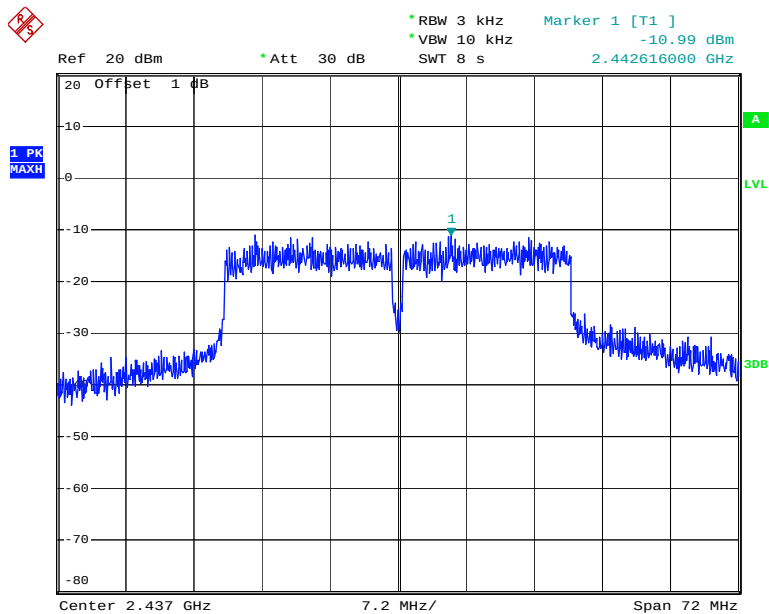Chain 1: Power Spectral Density, 802.11n ht40 Middle Channel


Date: 12.MAY.2014 16:08:45

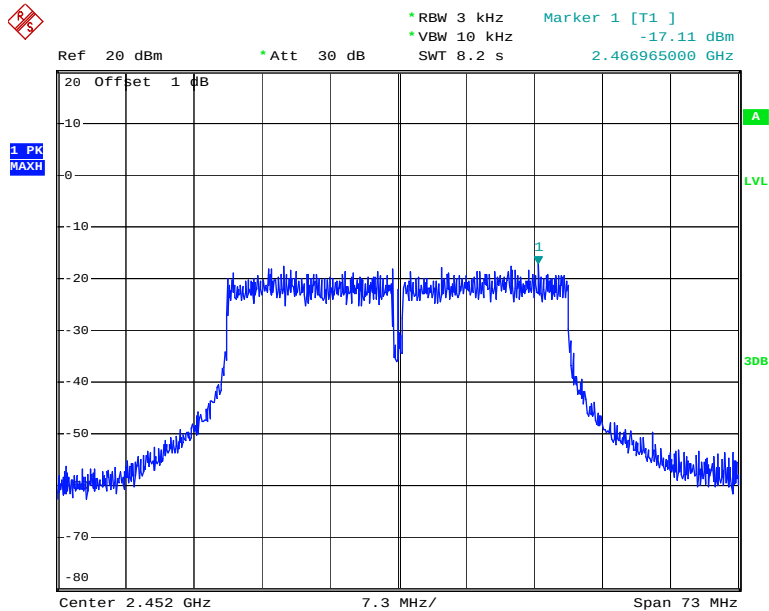Chain 1: Power Spectral Density, 802.11n ht40 High Channel

Date: 6.MAY.2014 10:32:15


5725-5850MHz band:

Chain 0: Power Spectral Density, 802.11a Low Channel

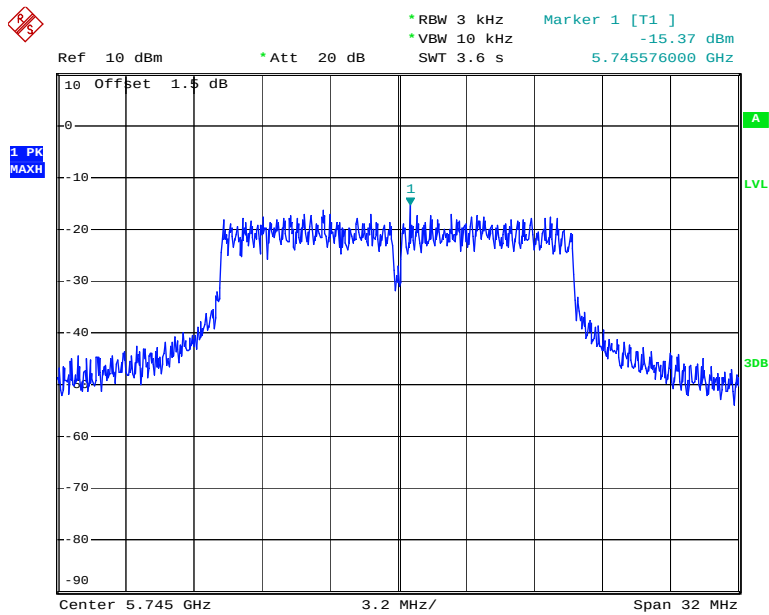


Date: 7.MAY.2014 10:46:16


Chain 0: Power Spectral Density, 802.11a Middle Channel

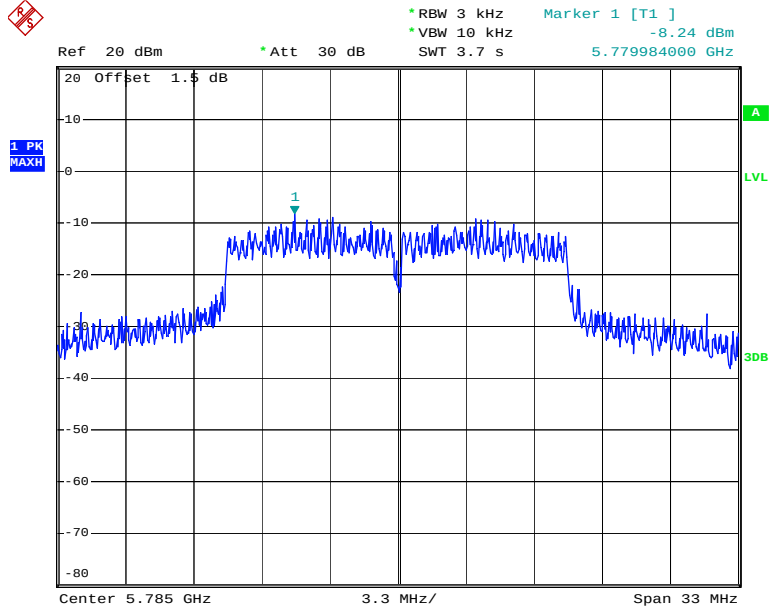

Date: 12.MAY.2014 16:21:45

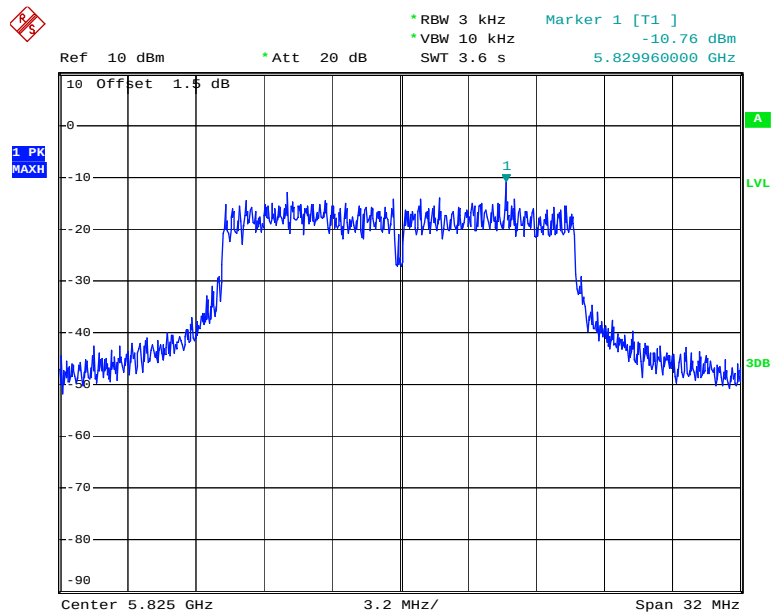
Chain 0: Power Spectral Density, 802.11a High Channel

Date: 7.MAY.2014 10:51:45

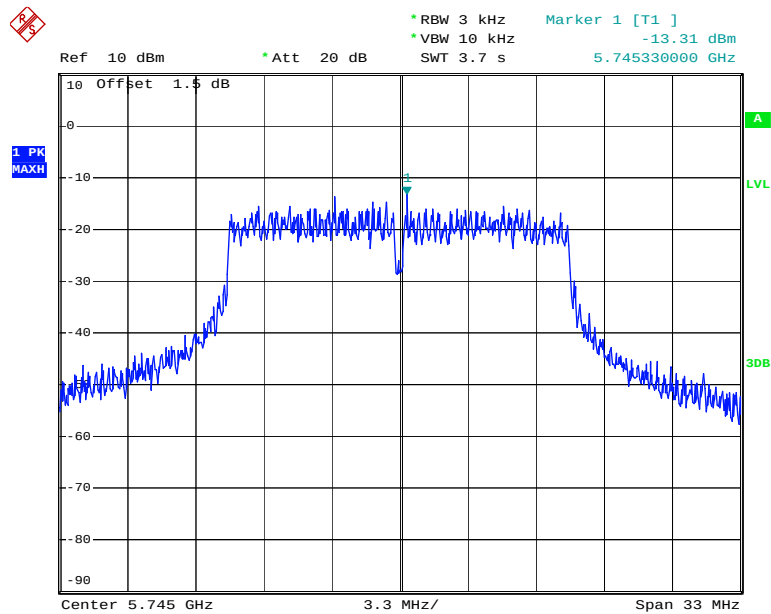Chain 1: Power Spectral Density, 802.11a Low Channel


Date: 9.MAY.2014 16:33:11

Chain 1: Power Spectral Density, 802.11a Middle Channel

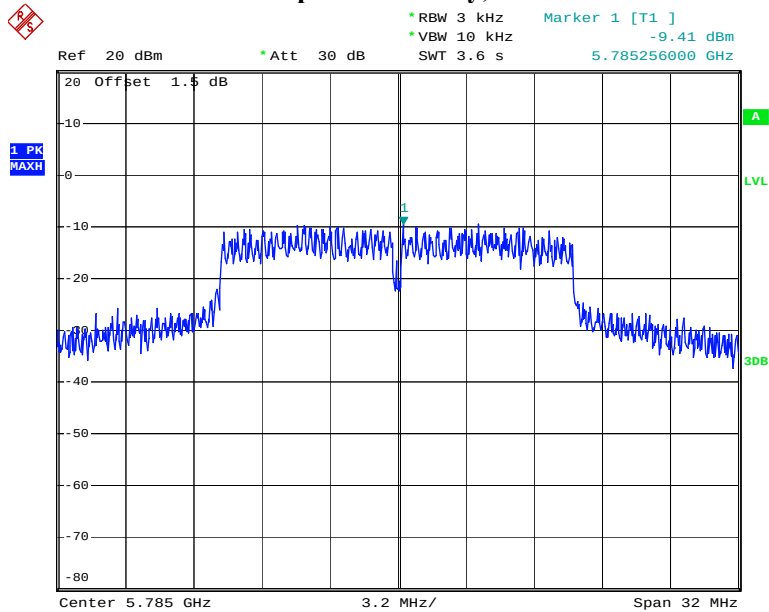


Date: 12.MAY.2014 16:23:44


Chain 1: Power Spectral Density, 802.11a High Channel

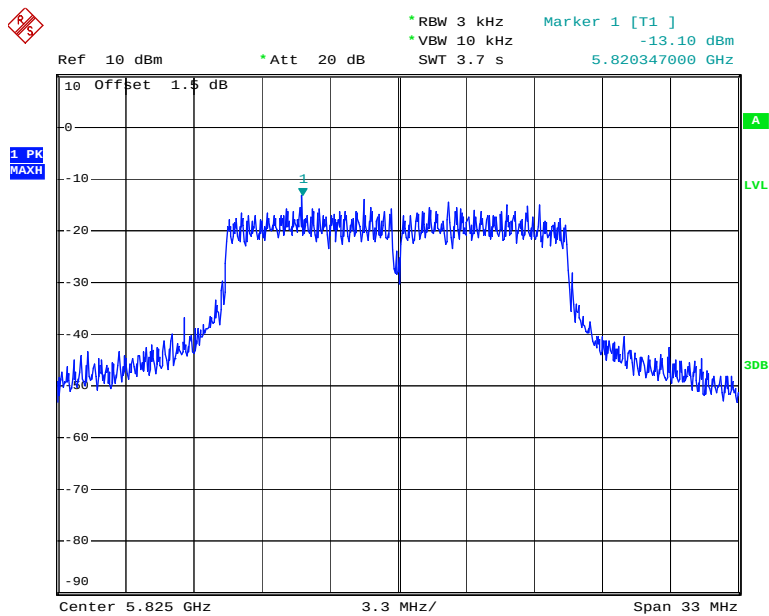


Date: 9.MAY.2014 16:27:52

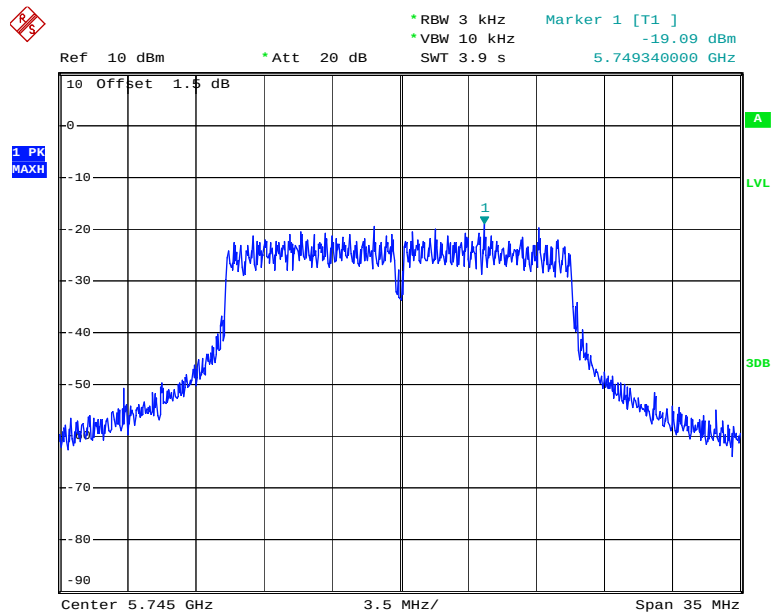Chain 0:Power Spectral Density, 802.11 n ht20 Low Channel


Date: 7.MAY.2014 10:58:01

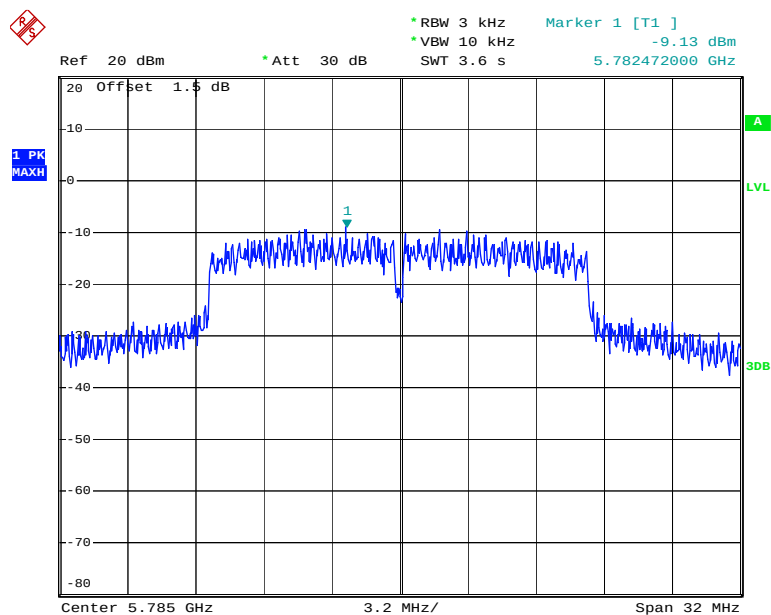Chain 0:Power Spectral Density, 802.11n ht20 Middle Channel

Date: 12.MAY.2014 16:26:49

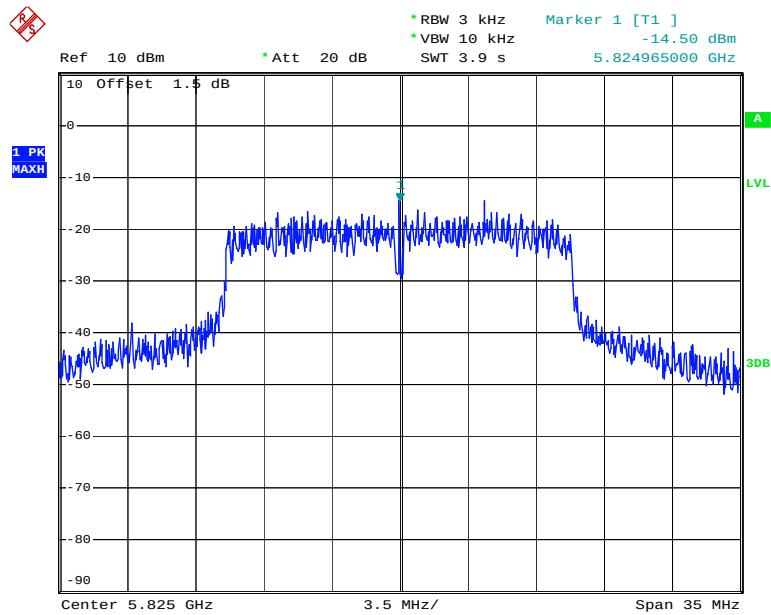
Chain 0:Power Spectral Density, 802.11n ht20 High Channel

Date: 7.MAY.2014 11:09:02

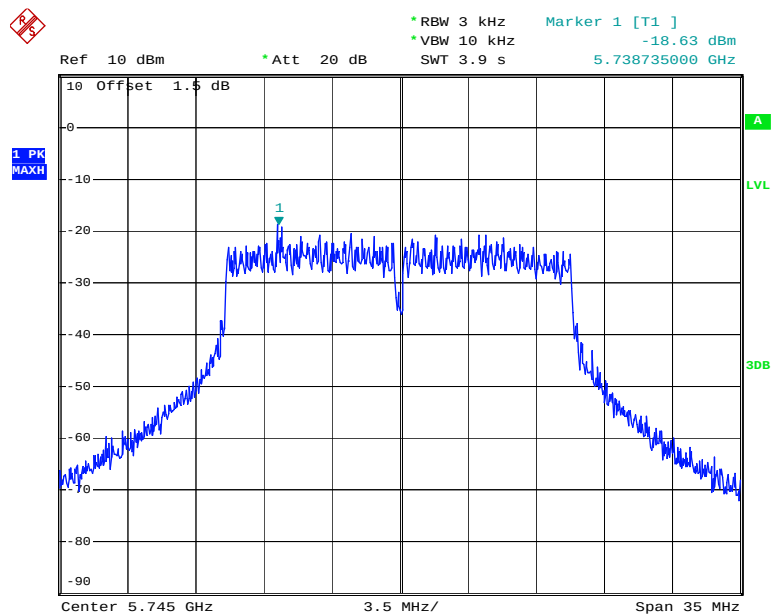Chain 1:Power Spectral Density, 802.11 n ht20 Low Channel


Date: 7.MAY.2014 10:55:37

Chain 1:Power Spectral Density, 802.11n ht20 Middle Channel

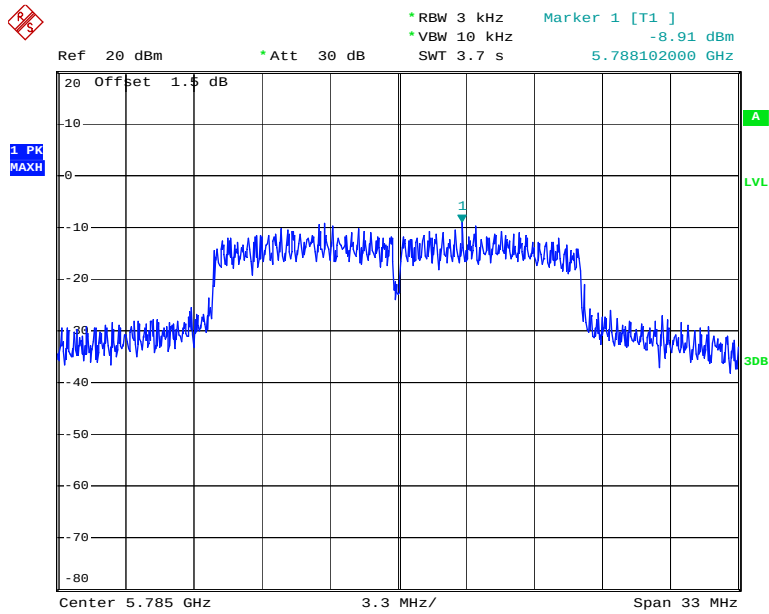


Date: 12.MAY.2014 16:28:33

Chain 1:Power Spectral Density, 802.11n ht20 High Channel

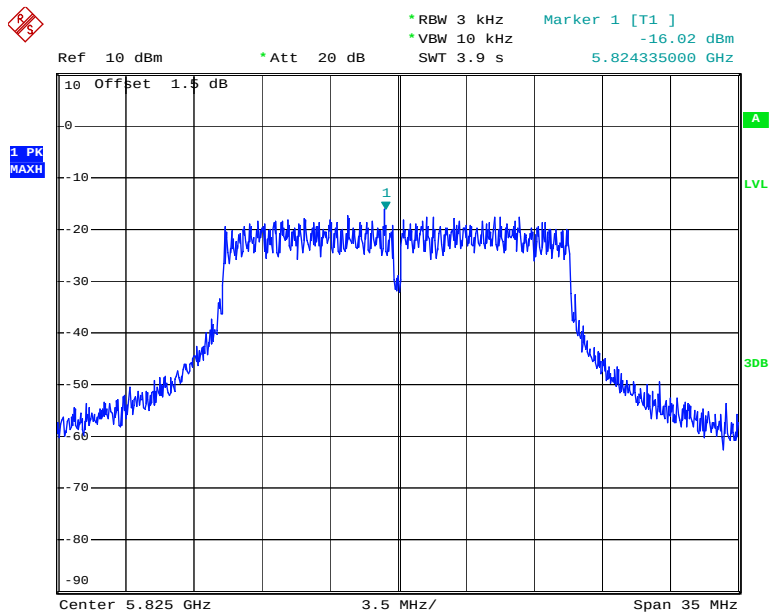


Date: 7.MAY.2014 11:06:50

Chain 0:Power Spectral Density, 802.11n ht40 Low Channel

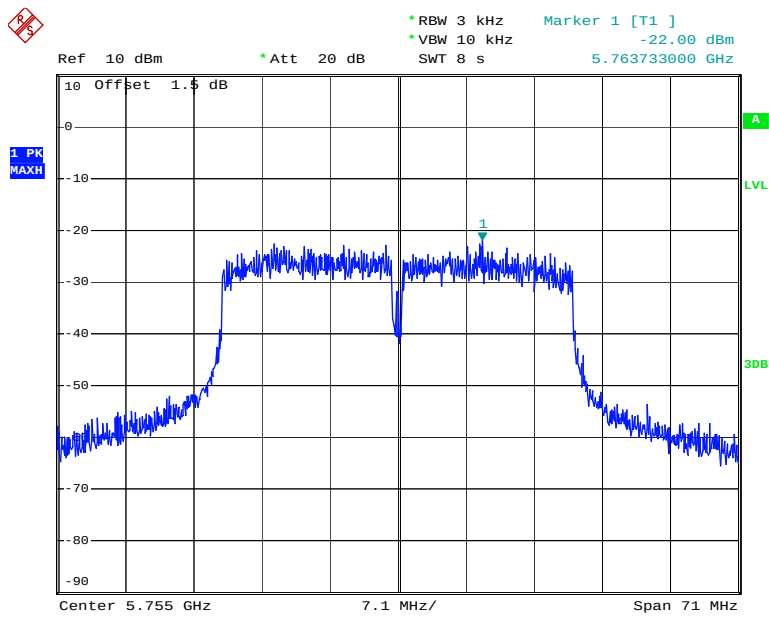


Date: 7.MAY.2014 11:12:22

Chain 0:Power Spectral Density, 802.11n ht40 High Channel

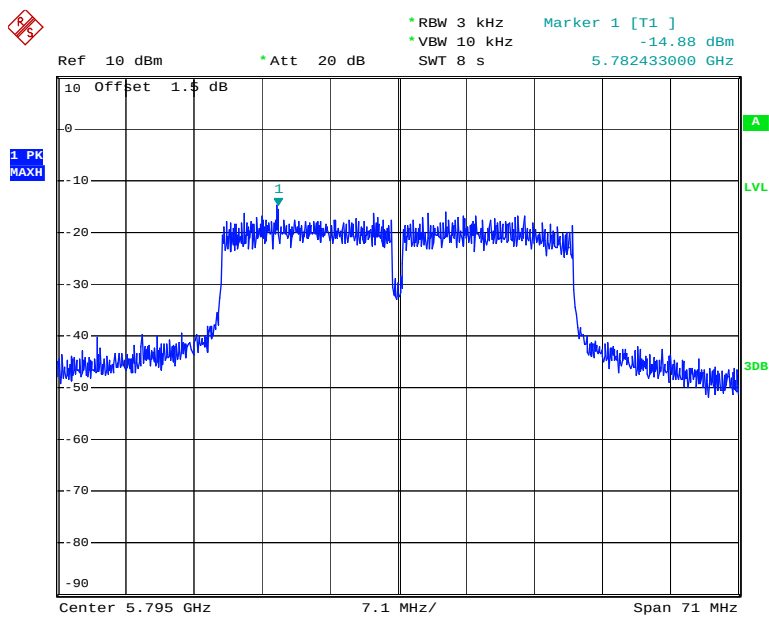


Date: 13.MAY.2014 16:50:55

Chain 1:Power Spectral Density, 802.11n ht40 Low Channel

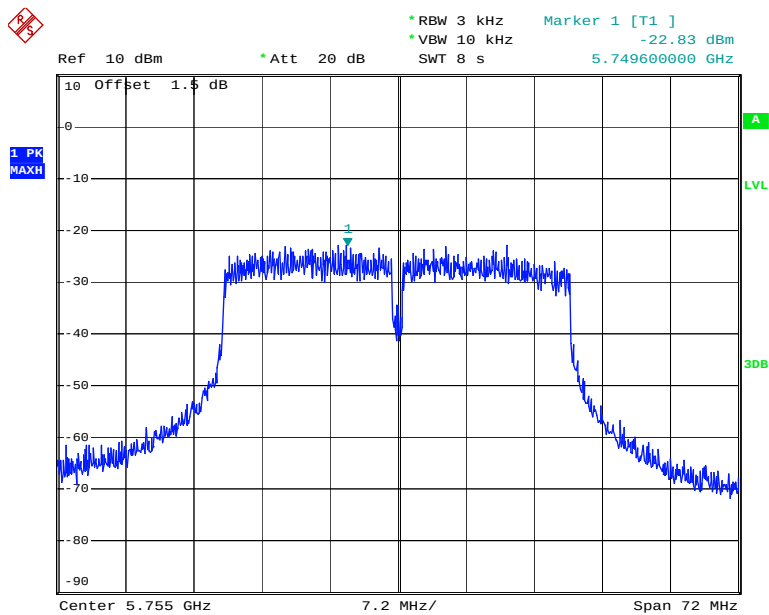

Date: 13.MAY.2014 10:06:53

Chain 1:Power Spectral Density, 802.11n ht40 High Channel

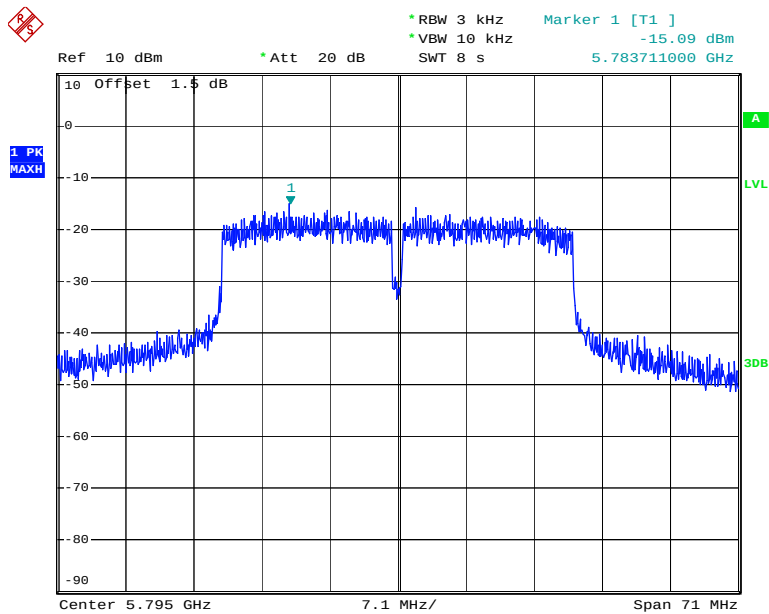

Date: 13.MAY.2014 16:48:36

***** END OF REPORT *****