


7.7.6 Test Results

EUT:	Wireless LAN equipment	Model Name. :	SBT200DI
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	TX 802.11b/g/n(20/40M)	Test By:	Lebron Wang


Mode	Channel	Frequency (MHz)	Power Density	Limit (dBm/3KHz)	Result
			(dBm/3KHz)		
802.11b	Low	2412	-22.222	8.00	Pass
	Middle	2437	-21.848	8.00	Pass
	High	2462	-21.507	8.00	Pass
802.11g	Low	2412	-26.163	8.00	Pass
	Middle	2437	-25.557	8.00	Pass
	High	2462	-25.279	8.00	Pass
802.11n20	Low	2412	-24.672	8.00	Pass
	Middle	2437	-24.595	8.00	Pass
	High	2462	-24.239	8.00	Pass
802.11n40	Low	2422	-25.409	8.00	Pass
	Middle	2437	-27.019	8.00	Pass
	High	2452	-25.572	8.00	Pass

Test plot


(802.11b) PSD plot on channel 1

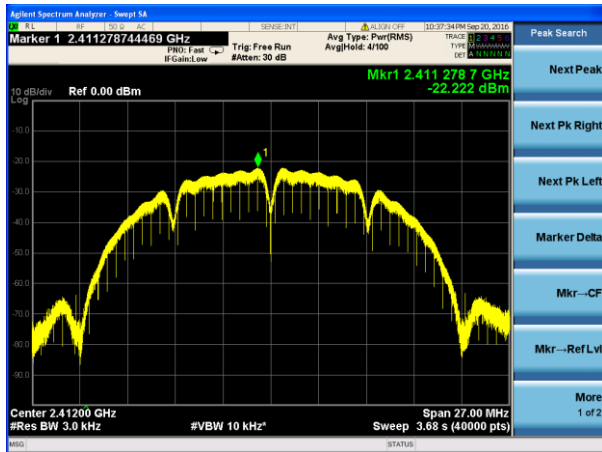


(802.11g) PSD plot on channel 1

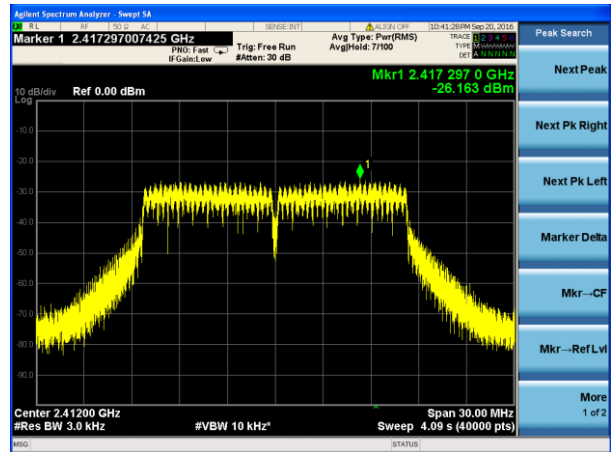


(802.11b) PSD plot on channel 6

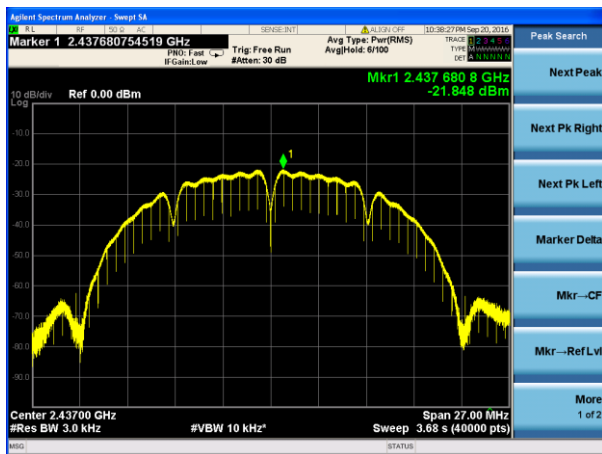


(802.11g) PSD plot on channel 6

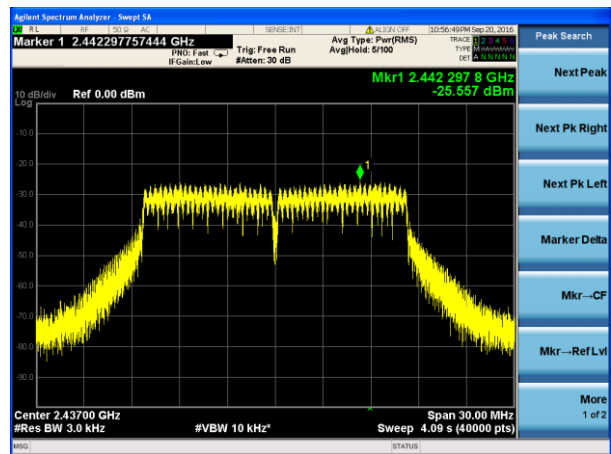

(802.11b) PSD plot on channel 11

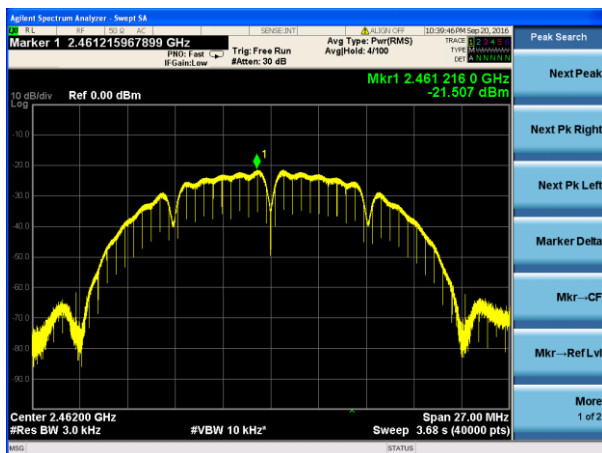


(802.11g) PSD plot on channel 11

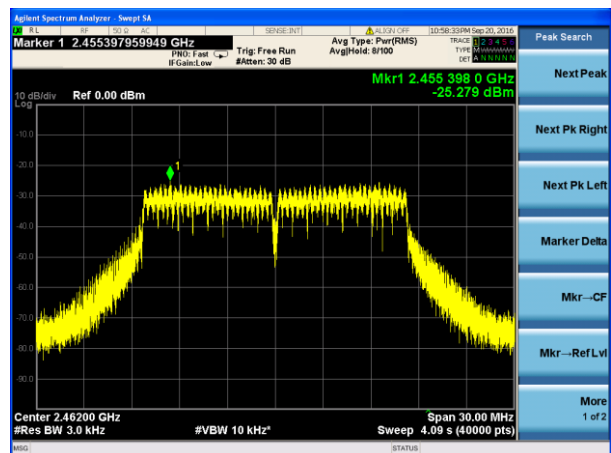


Test plot


(802.11n20) PSD plot on channel 1

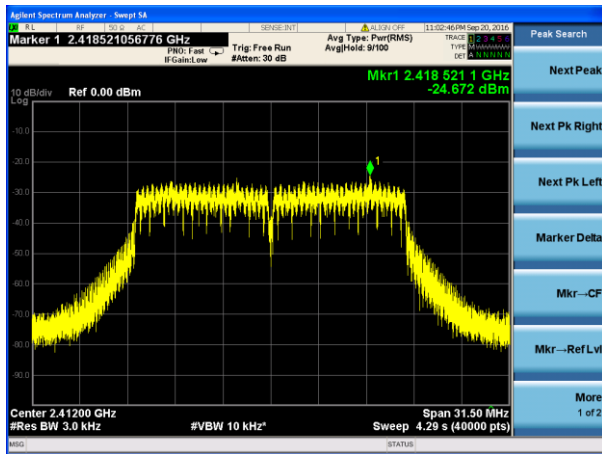


(802.11n40) PSD plot on channel 3

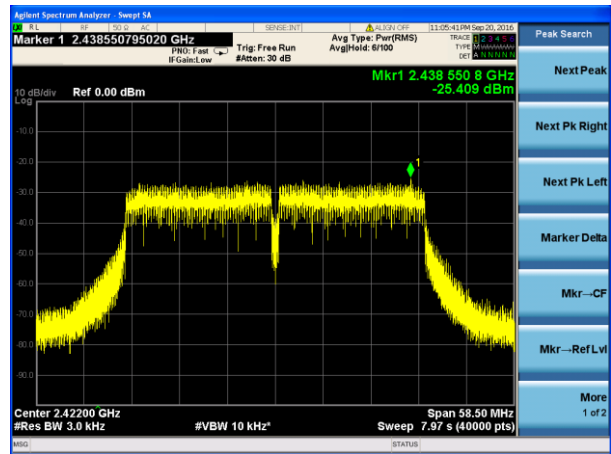


(802.11n20) PSD plot on channel 6

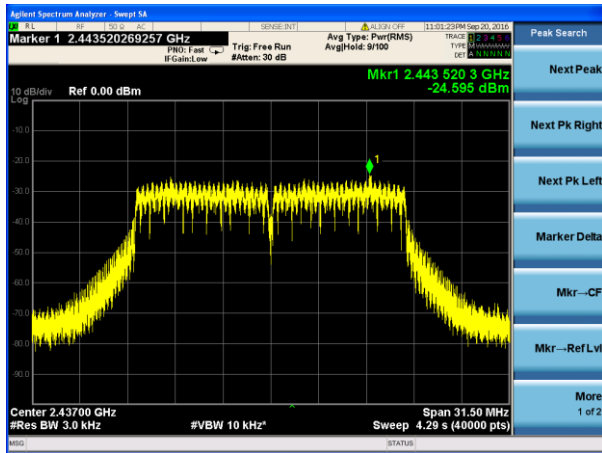


(802.11n40) PSD plot on channel 6

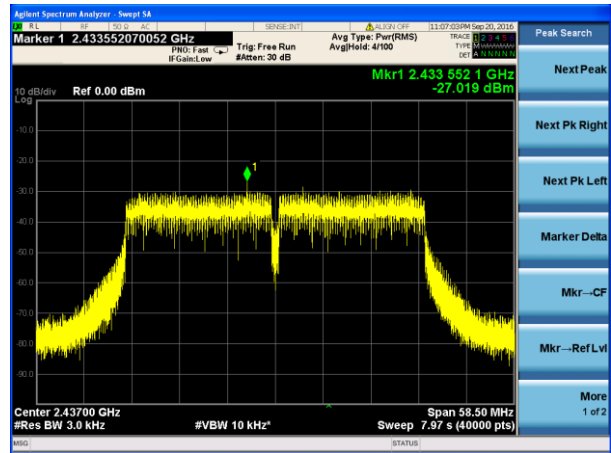

(802.11n20) PSD plot on channel 11

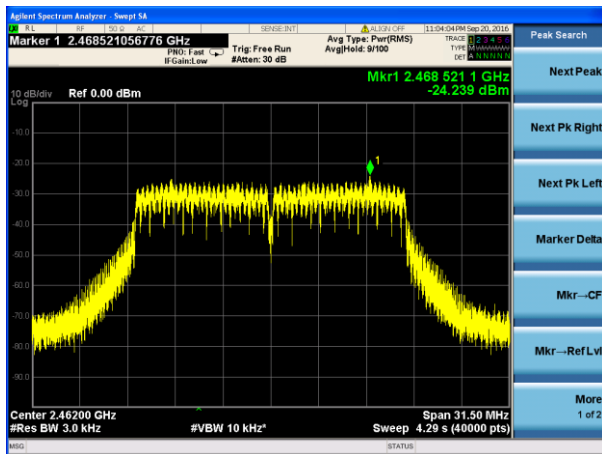

(802.11n40) PSD plot on channel 9

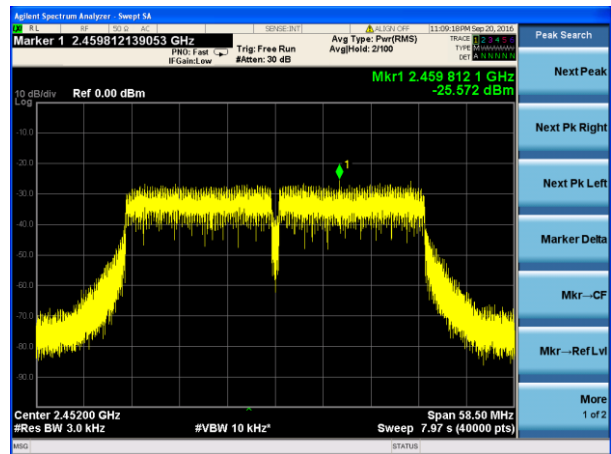

7.8 CONDUCTED BAND EDGE MEASUREMENT

7.8.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 DTS 01 Meas. Guidance v03r04

When performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below. The integration method described below can be used when performing conducted or radiated average measurements.

7.8.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

7.8.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.8.4 Test Setup

Please refer to Section 6.1 of this test report.

7.8.5 Marker-delta method

The marker-delta method, as described in ANSI C63.10, can be used to perform measurements of the radiated unwanted emissions level at the band-edges provided that the 99% OBW of the fundamental emission is within 2 MHz of the authorized band edge.

7.8.6 Integration method

The following procedures may be used to determine the average power or power density of any unwanted emission. Use the procedure described in 13.3.1 when the EUT can be configured to transmit continuously (i.e., duty cycle $\geq 98\%$). Use the procedure described in 13.3.2 when the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent). Use the procedure described in 13.3.3 when the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

7.8.5 Test Setup

Reference level measurement

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Emission level measurement


- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq 3 \times$ RBW.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

7.8.6 Test Results

EUT:	Wireless LAN equipment	Model Name. :	SBT200DI
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	TX 802.11b/g/n(20/40M)	Test By:	Lebron Wang


(802.11b) Band Edge-Low Channel

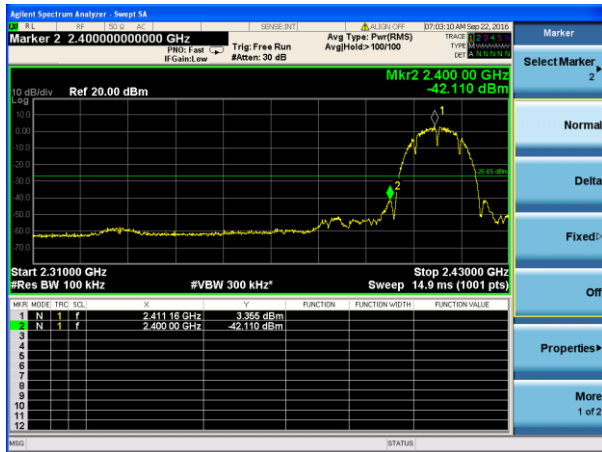

(802.11b) Band Edge-High Channel



(802.11g) Band Edge-Low Channel

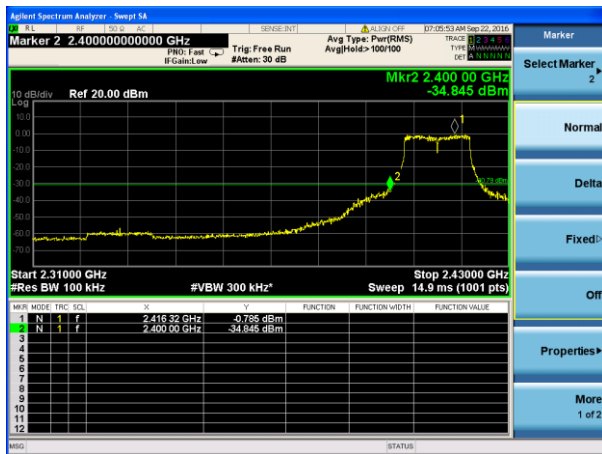

(802.11g) Band Edge-High Channel




(802.11n-HT20) Band Edge-Low Channel




(802.11n-HT20) Band Edge-High Channel



(802.11n-HT40) Band Edge-Low Channel

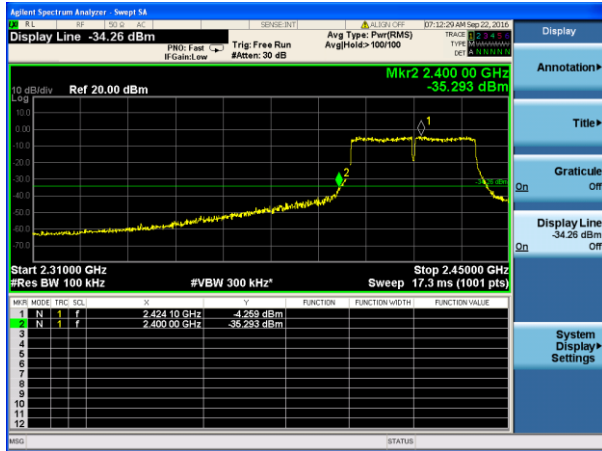

(802.11n-HT40) Band Edge-Low Channel

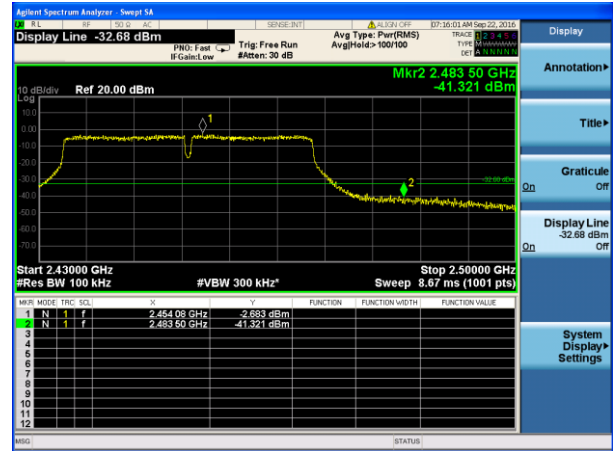

7.9 SPURIOUS RF CONDUCTED EMISSIONS

7.9.1 Conformance Limit

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

7.9.2 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.9.3 Test Setup

Please refer to Section 6.1 of this test report.

7.9.4 Test Procedure


The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength , and measure frequency range from 9KHz to 26.5GHz.

7.9.5 Test Results


Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.

Test Plot


802.11b on channel 01

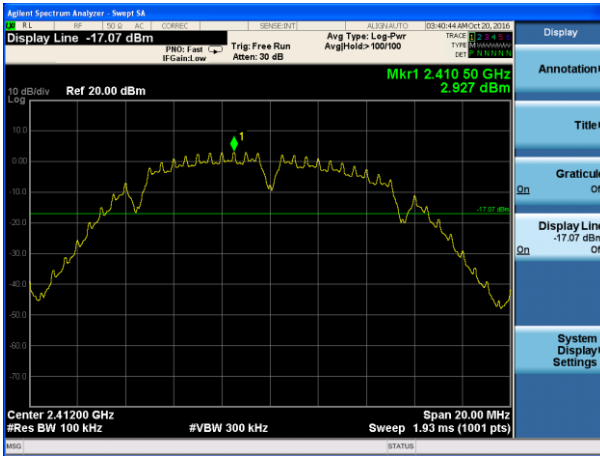

802.11b on channel 01

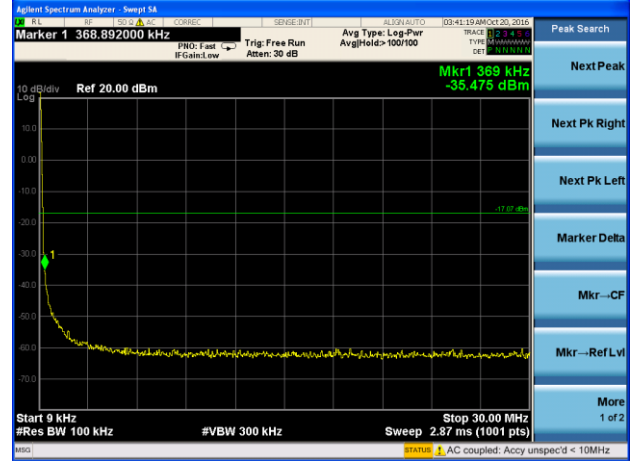

802.11b on channel 01

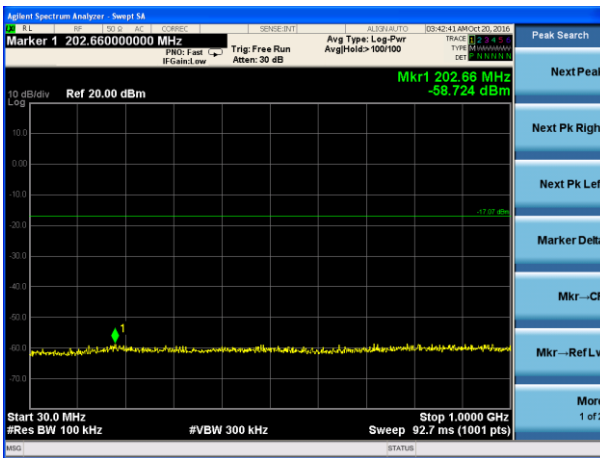

802.11b on channel 01




Test Plot


802.11b on channel 06



802.11b on channel 06

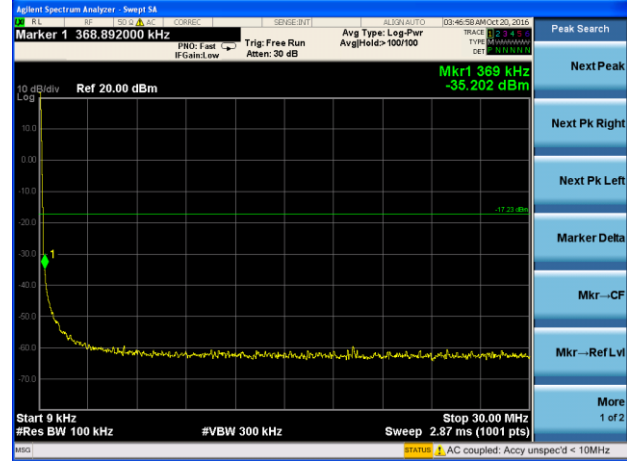

802.11b on channel 06

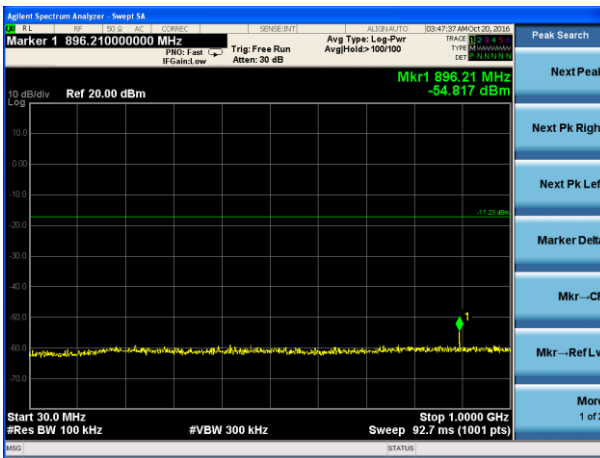

802.11b on channel 06




Test Plot


802.11b on channel 11



802.11b on channel 11

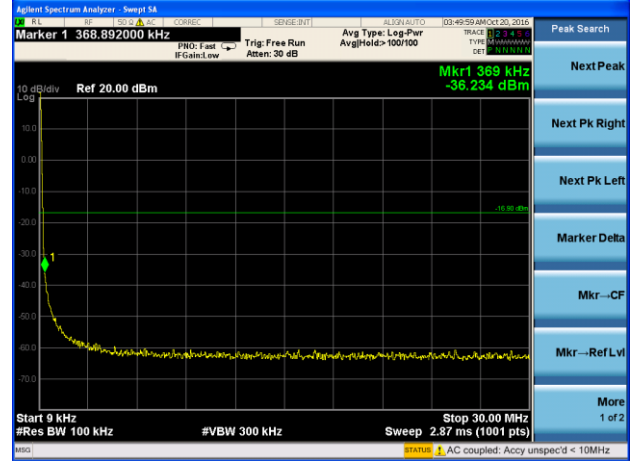

802.11b on channel 11

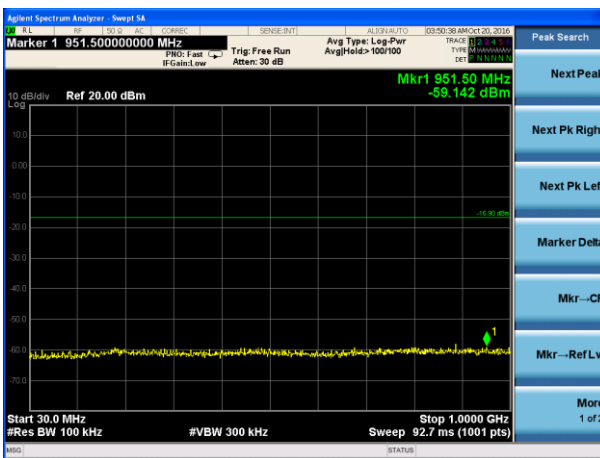

802.11b on channel 11




Test Plot


802.11g on channel 01



802.11g on channel 01

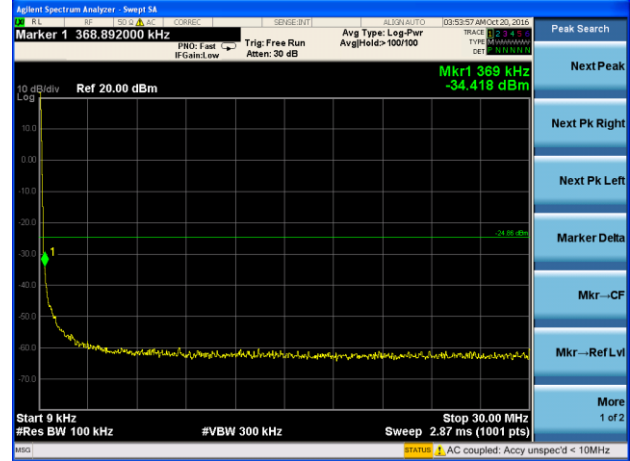

802.11g on channel 01

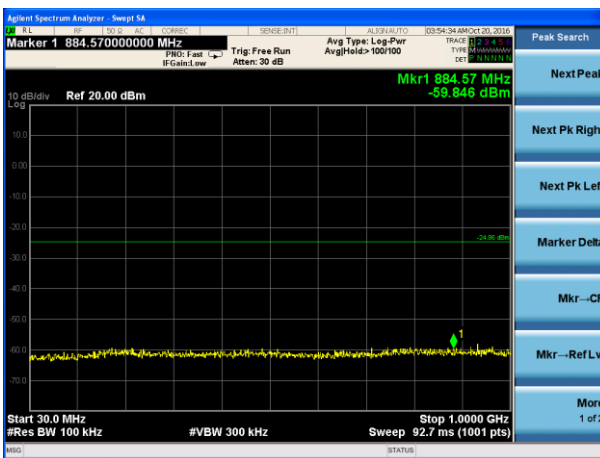


802.11g on channel 01




Test Plot


802.11g on channel 06

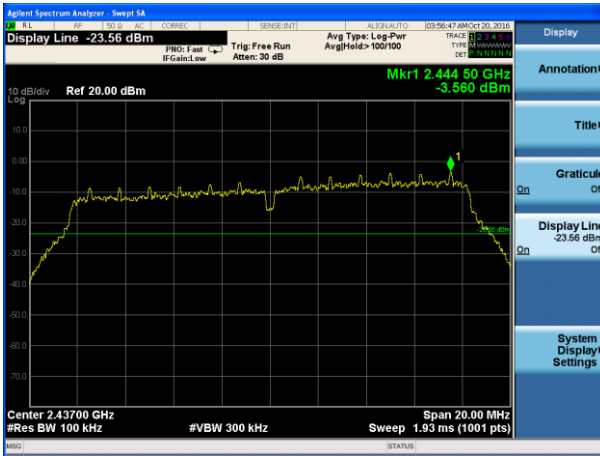

802.11g on channel 06

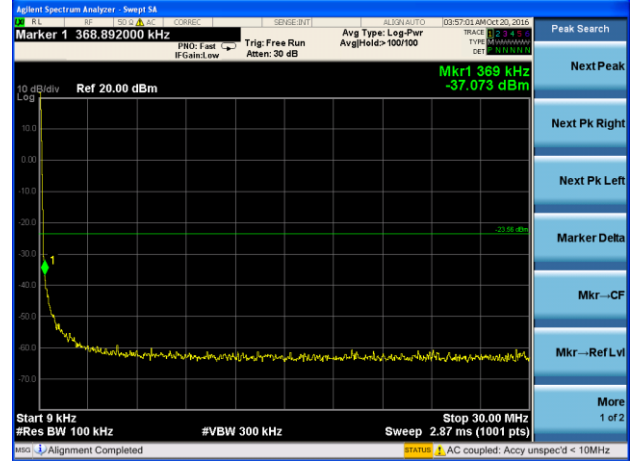

802.11g on channel 06

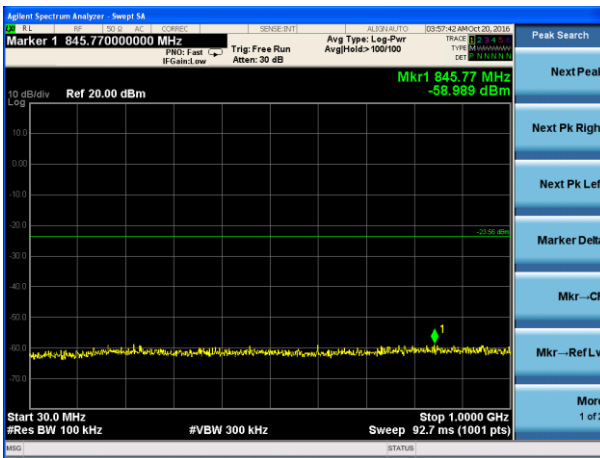


802.11g on channel 06




Test Plot


802.11g on channel 11

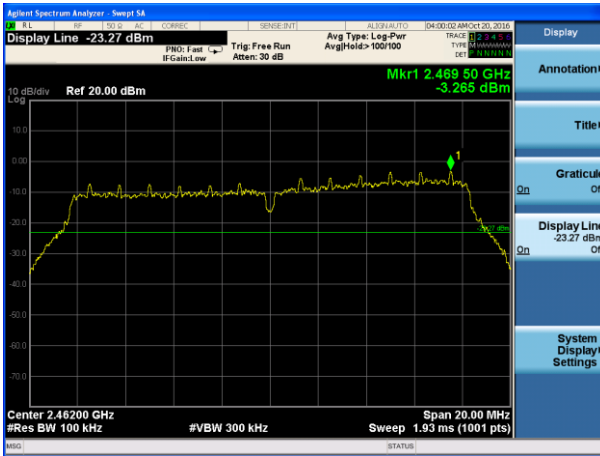

802.11g on channel 11

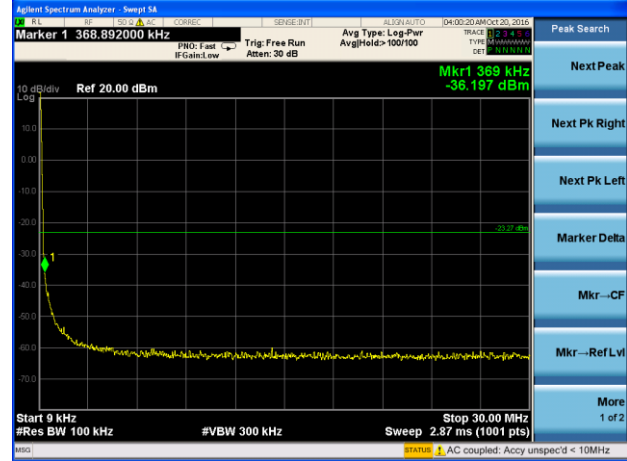

802.11g on channel 11

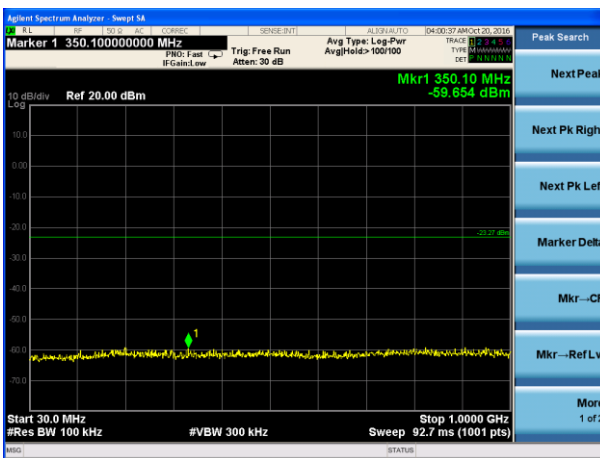


802.11g on channel 11




Test Plot


802.11n20 on channel 01

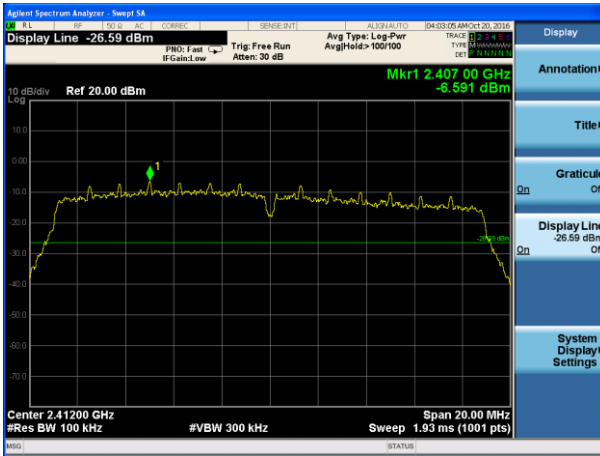

802.11n20 on channel 01

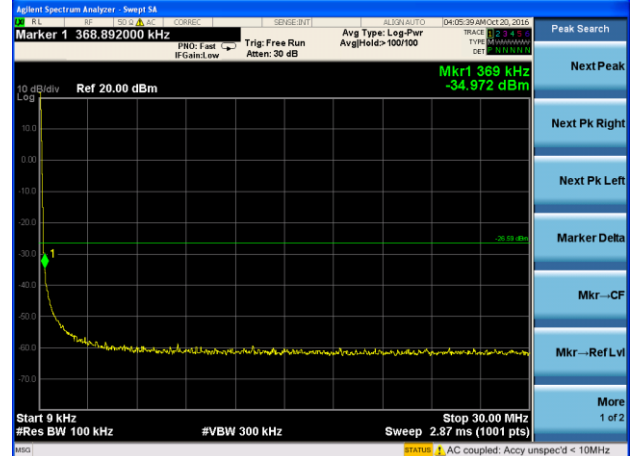

802.11 n20 on channel 01

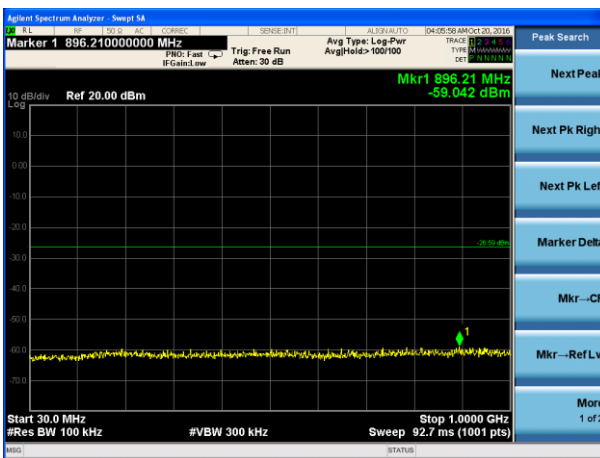


802.11 n20 on channel 01




Test Plot


802.11 n20 on channel 06

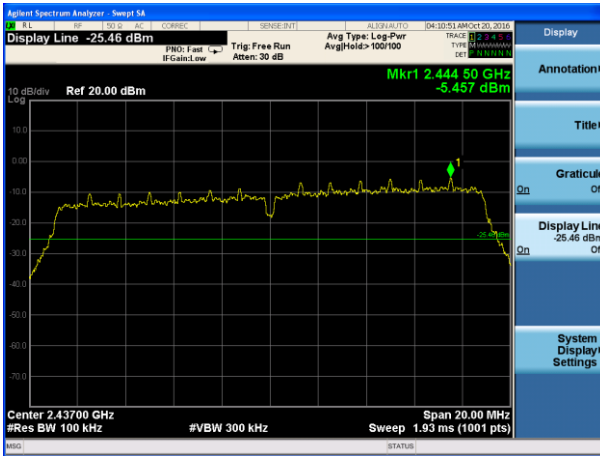

802.11 n20 on channel 06

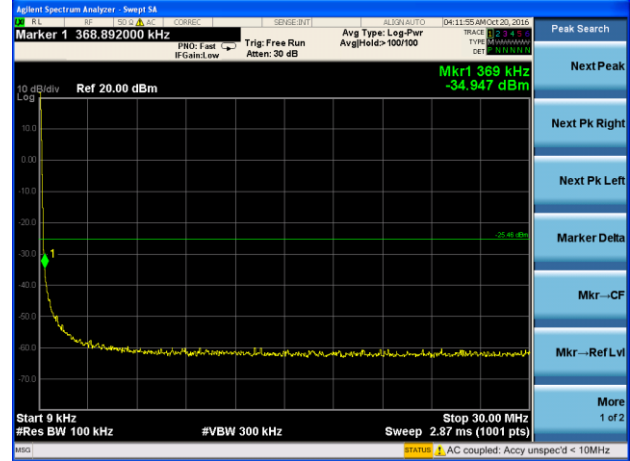

802.11 n20 on channel 06

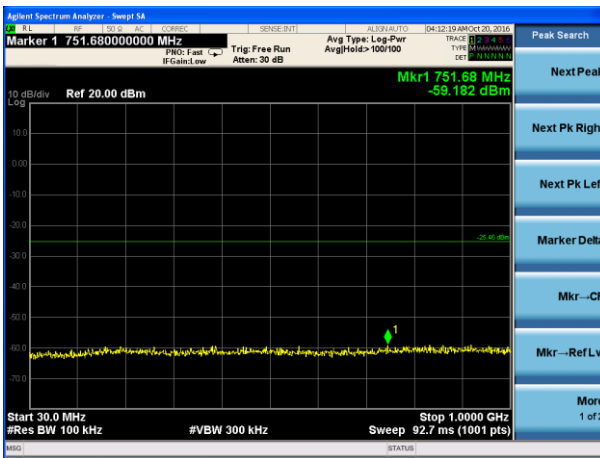


802.11 n20 on channel 06




Test Plot


802.11 n20 on channel 11

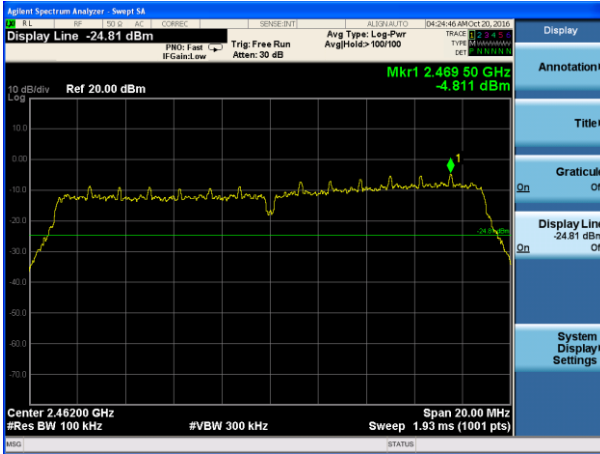

802.11 n20 on channel 11

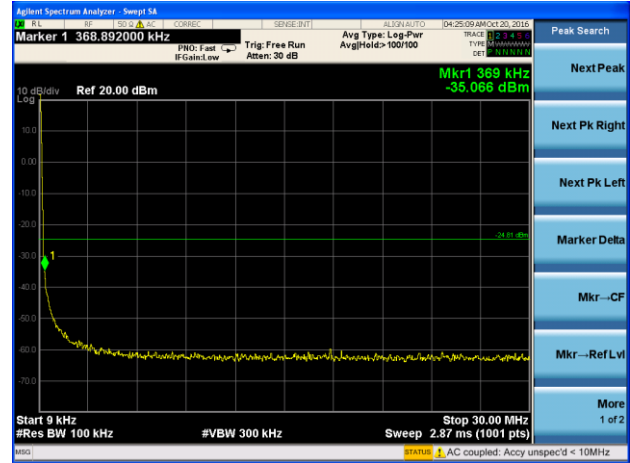

802.11 n20 on channel 11

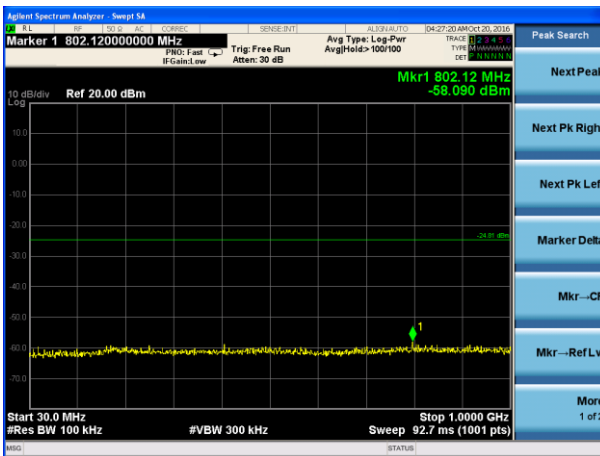


802.11 n20 on channel 11




Test Plot


802.11n40 on channel 03

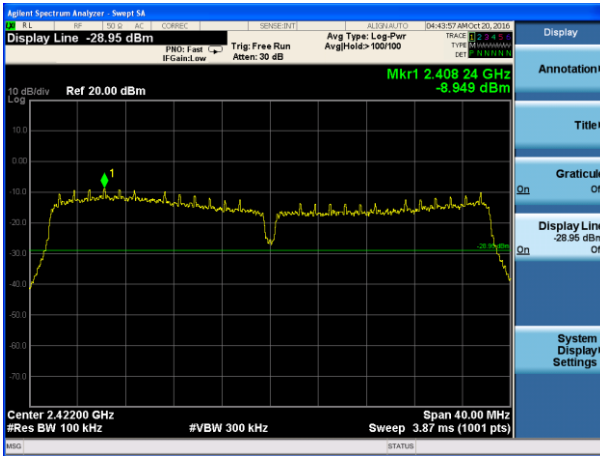

802.11n40 on channel 03

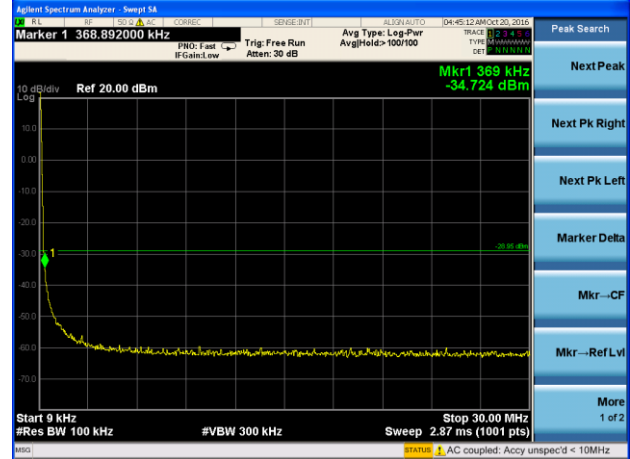

802.11n40 on channel 03

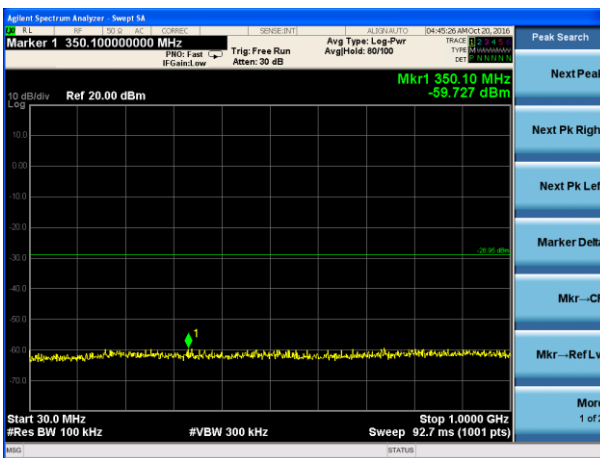

802.11n40 on channel 03




Test Plot


802.11n40 on channel 06



802.11 n40 on channel 06

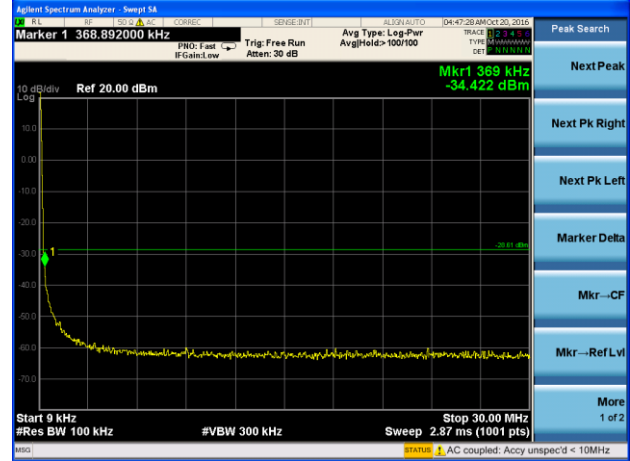

802.11 n40 on channel 06

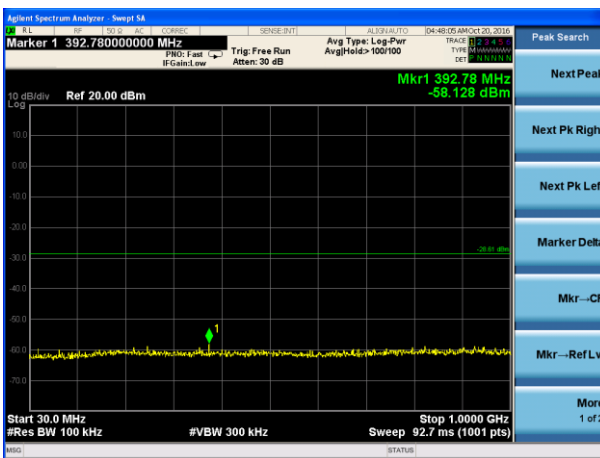


802.11 n40 on channel 06




Test Plot


802.11 n40 on channel 9

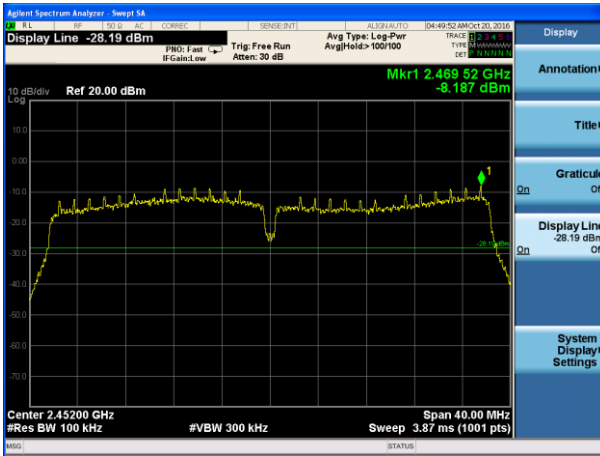

802.11 n40 on channel 9

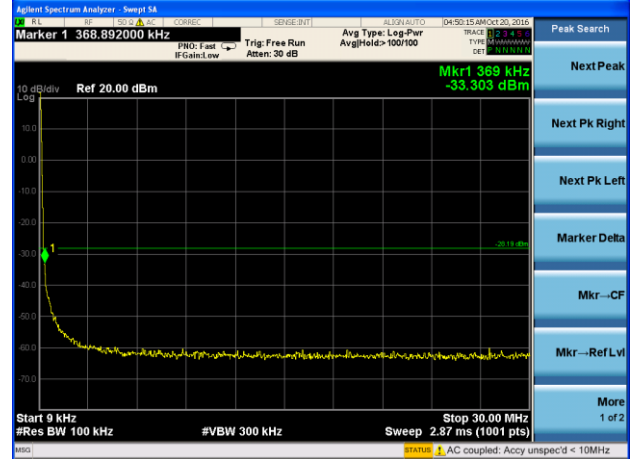

802.11 n40 on channel 9

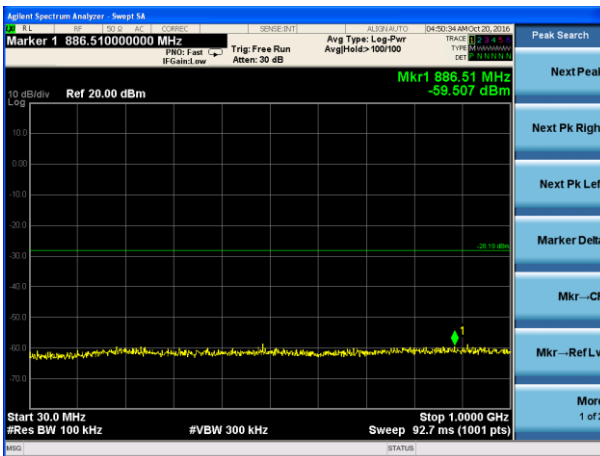

802.11 n40 on channel 9



7.10 ANTENNA APPLICATION

7.10.1 Antenna Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.10.2 Result

The EUT antenna is permanent attached metal PIFA antenna. It comply with the standard requirement.