


|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/17 - 23:29 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at 2417MHz |                          |

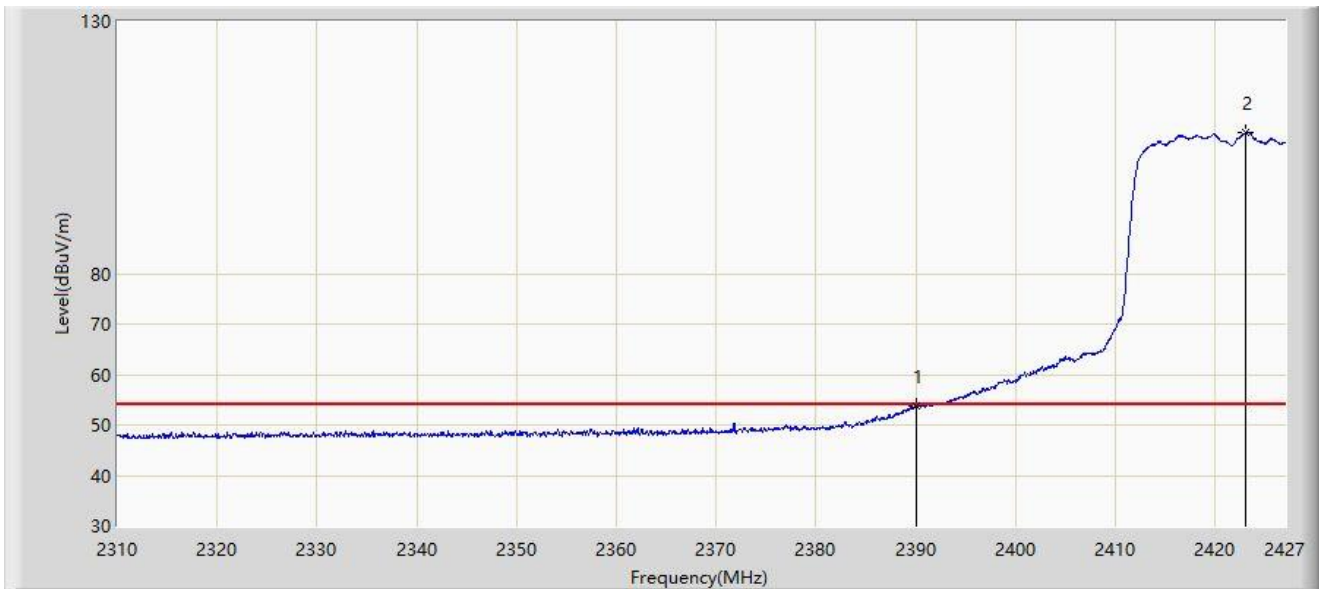


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2390.000        | 53.842                 | 22.253               | -0.158      | 54.000         | 31.588        | AV   |
| 2  |      | 2423.022        | 107.833                | 76.133               | N/A         | N/A            | 31.700        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 00:01 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at 2422MHz |                          |

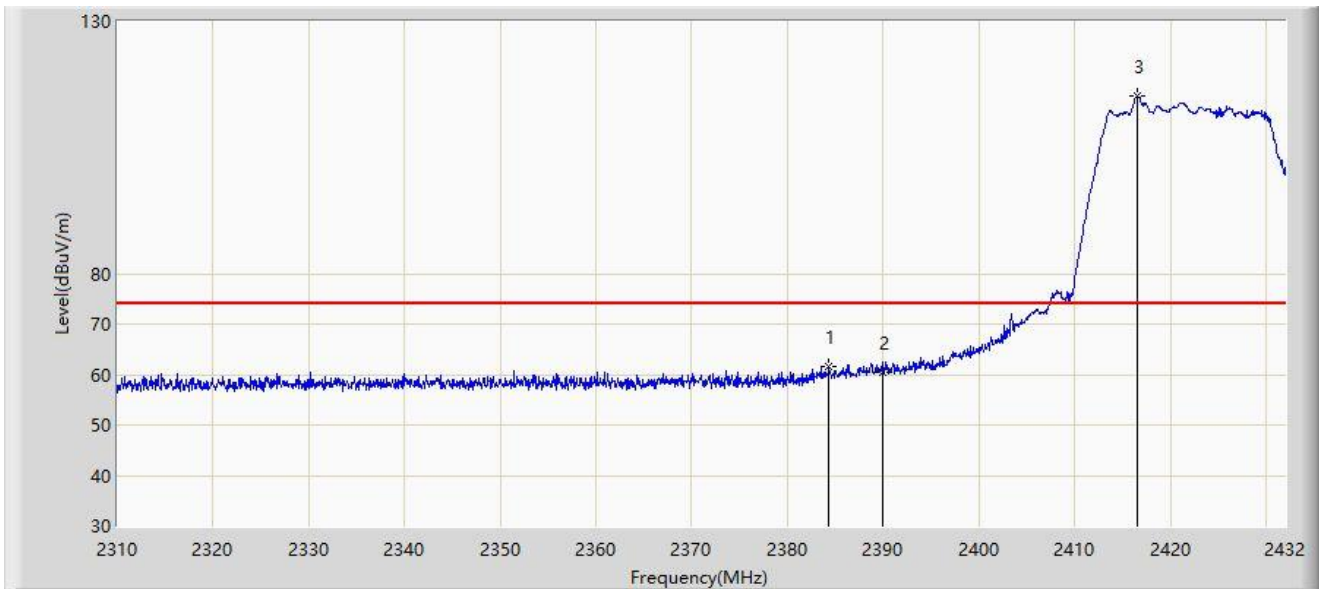


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2384.359        | 61.546                 | 30.062               | -12.454     | 74.000         | 31.485        | PK   |
| 2  |      | 2390.000        | 60.314                 | 28.725               | -13.686     | 74.000         | 31.588        | PK   |
| 3  |      | 2416.567        | 115.095                | 83.404               | N/A         | N/A            | 31.691        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/17 - 23:58 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at 2422MHz |                          |

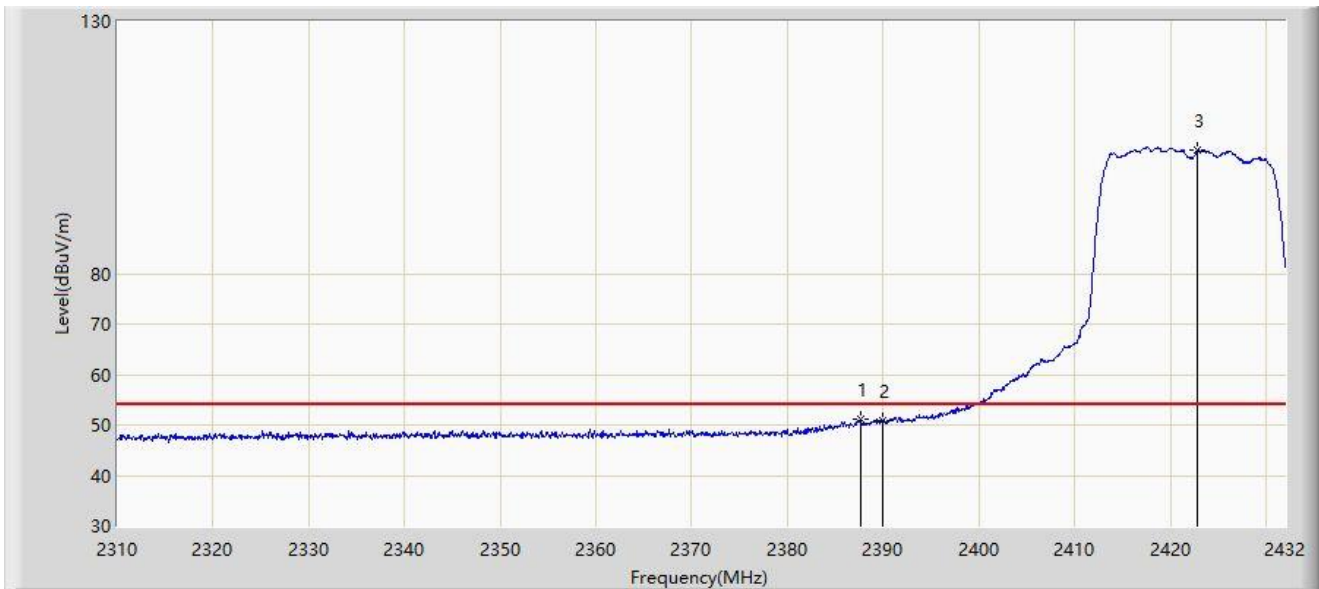


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2387.592        | 51.071                 | 19.527               | -2.929      | 54.000         | 31.544        | AV   |
| 2  |      | 2390.000        | 50.814                 | 19.225               | -3.186      | 54.000         | 31.588        | AV   |
| 3  |      | 2422.850        | 104.406                | 72.706               | N/A         | N/A            | 31.700        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/17 - 23:57 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at 2422MHz |                          |

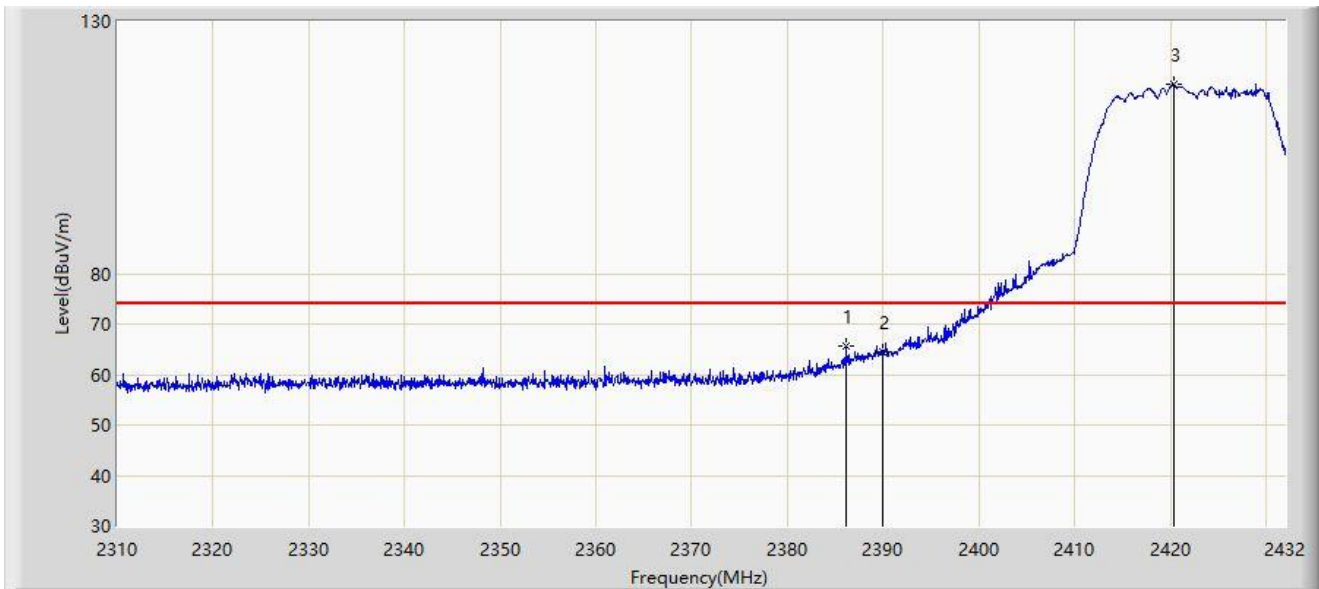


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2386.128        | 65.789                 | 34.272               | -8.211      | 74.000         | 31.518        | PK   |
| 2  |      | 2390.000        | 64.467                 | 32.878               | -9.533      | 74.000         | 31.588        | PK   |
| 3  |      | 2420.349        | 117.454                | 85.757               | N/A         | N/A            | 31.697        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/17 - 23:51 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at 2422MHz |                          |

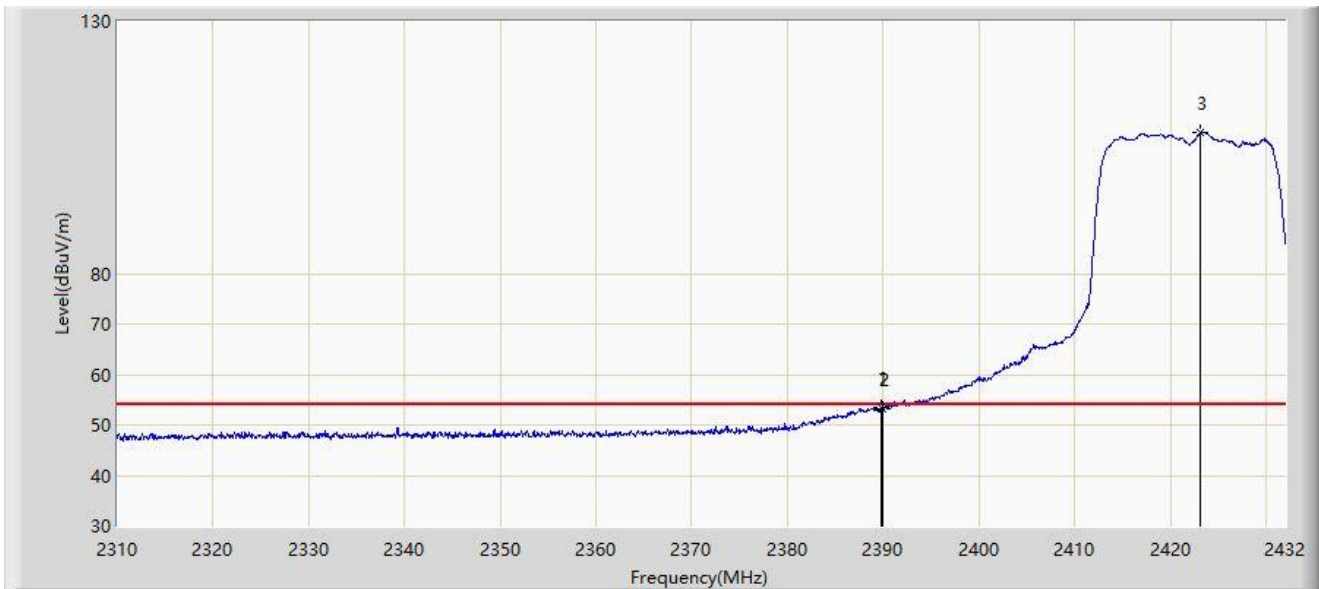


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2389.788        | 53.491                 | 21.906               | -0.509      | 54.000         | 31.584        | AV   |
| 2  |      | 2390.000        | 53.254                 | 21.665               | -0.746      | 54.000         | 31.588        | AV   |
| 3  |      | 2423.155        | 107.866                | 76.166               | N/A         | N/A            | 31.701        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 00:20 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at 2427MHz |                          |

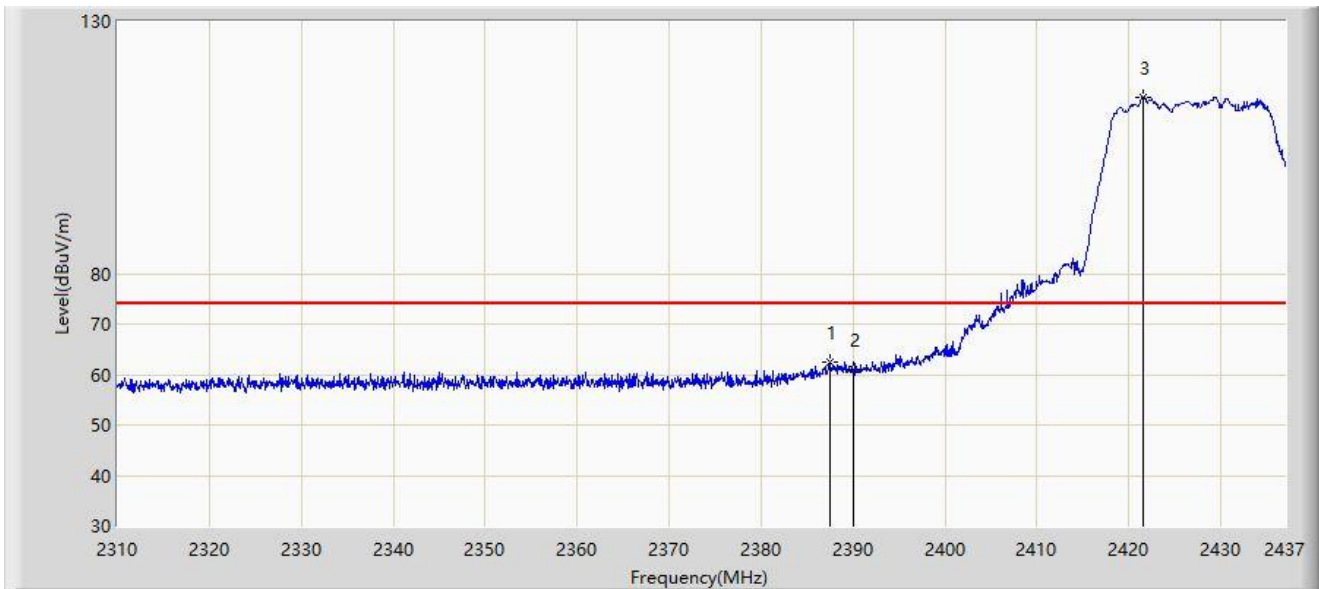


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2387.470        | 62.390                 | 30.848               | -11.610     | 74.000         | 31.542        | PK   |
| 2  |      | 2390.000        | 60.890                 | 29.301               | -13.110     | 74.000         | 31.588        | PK   |
| 3  |      | 2421.570        | 115.046                | 83.348               | N/A         | N/A            | 31.699        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 00:18 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at 2427MHz |                          |

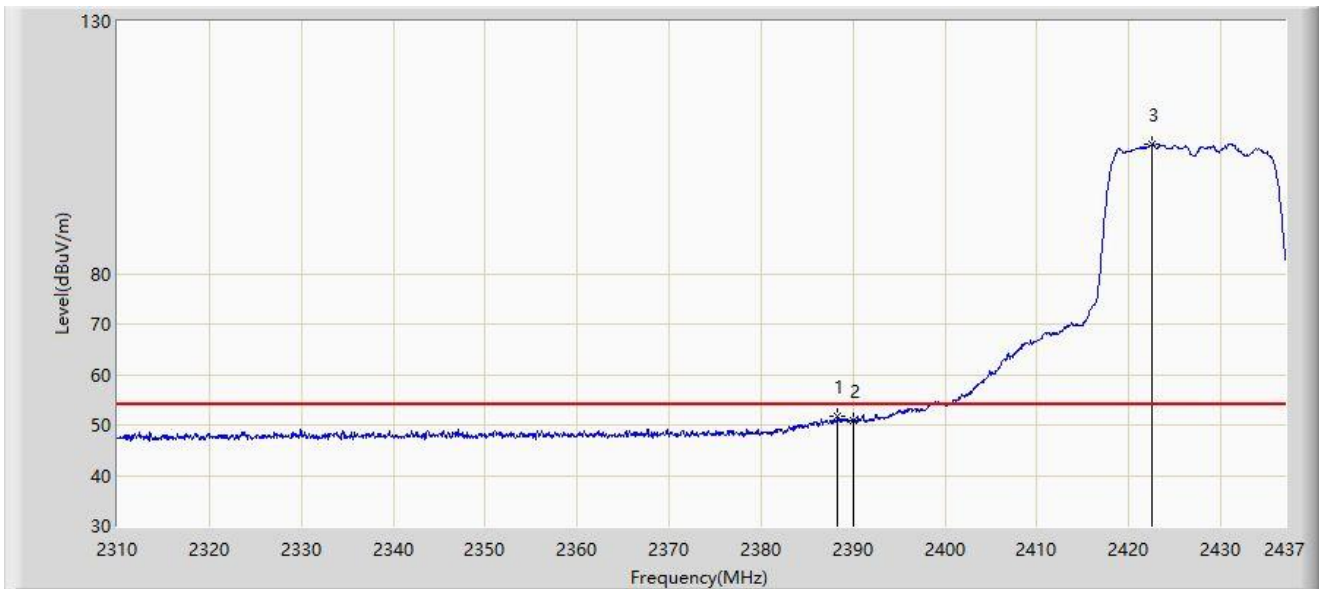


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2388.359        | 51.710                 | 20.152               | -2.290      | 54.000         | 31.558        | AV   |
| 2  |      | 2390.000        | 50.987                 | 19.398               | -3.013      | 54.000         | 31.588        | AV   |
| 3  |      | 2422.585        | 105.664                | 73.964               | N/A         | N/A            | 31.699        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 00:17 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at 2427MHz |                          |

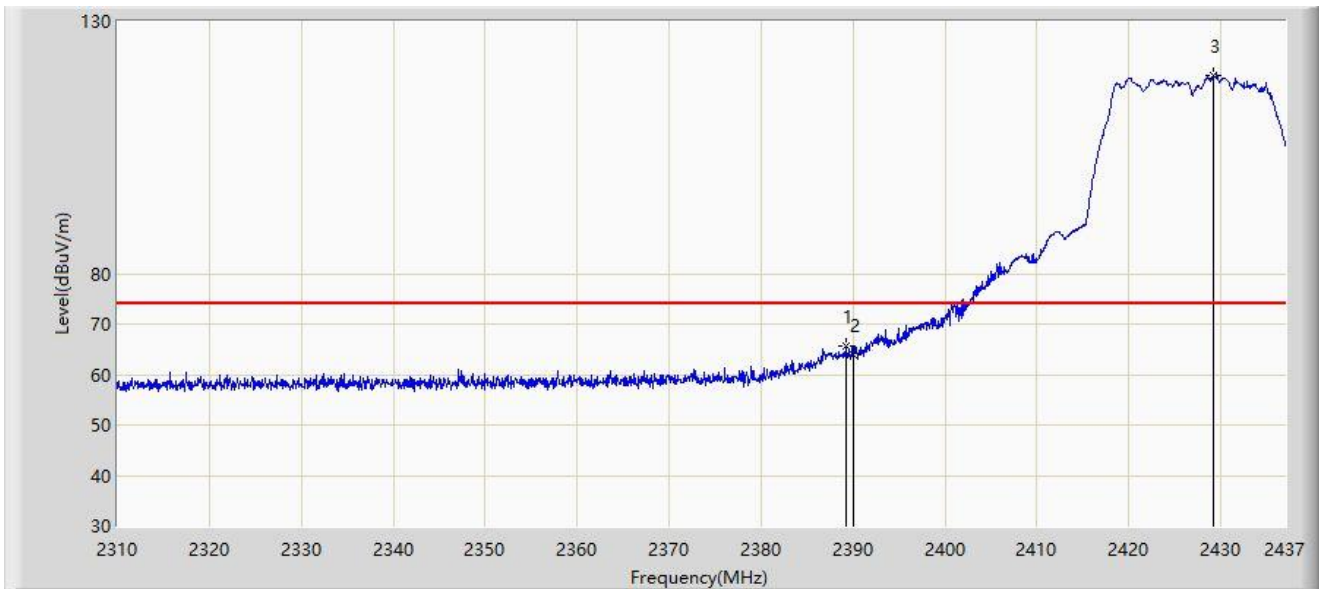


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2389.185        | 65.512                 | 33.938               | -8.488      | 74.000         | 31.573        | PK   |
| 2  |      | 2390.000        | 63.938                 | 32.349               | -10.062     | 74.000         | 31.588        | PK   |
| 3  |      | 2429.253        | 119.379                | 87.669               | N/A         | N/A            | 31.710        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 00:15 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at 2427MHz |                          |

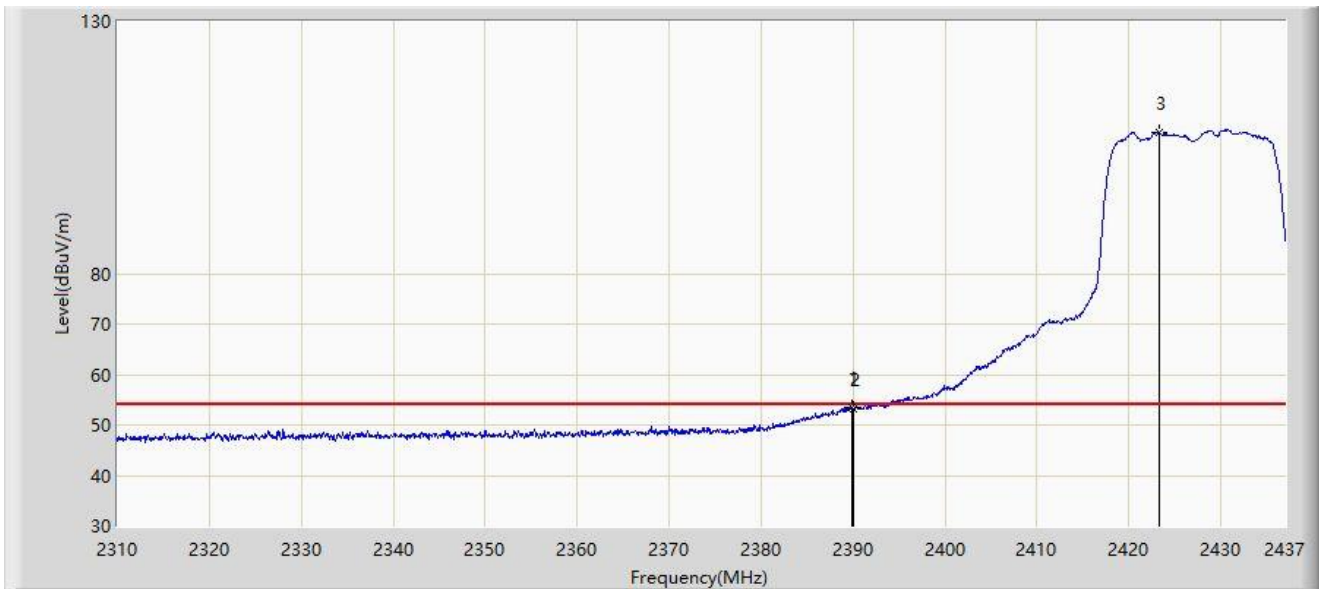


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2389.883        | 53.596                 | 22.010               | -0.404      | 54.000         | 31.587        | AV   |
| 2  |      | 2390.000        | 53.176                 | 21.587               | -0.824      | 54.000         | 31.588        | AV   |
| 3  |      | 2423.284        | 108.001                | 76.300               | N/A         | N/A            | 31.701        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 21:04 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at 2447MHz |                          |

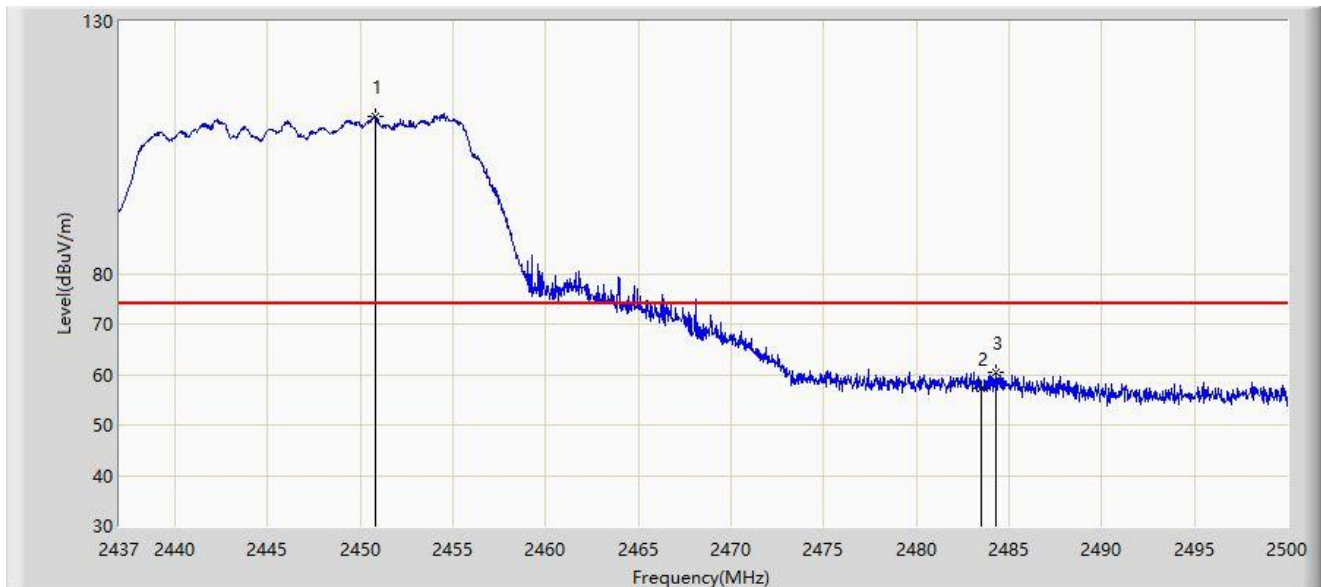


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2450.797        | 111.142                | 79.363               | N/A         | N/A            | 31.779        | PK   |
| 2  |      | 2483.500        | 57.199                 | 25.327               | -16.801     | 74.000         | 31.872        | PK   |
| 3  | *    | 2484.250        | 60.533                 | 28.661               | -13.467     | 74.000         | 31.872        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 21:03 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at 2447MHz |                          |

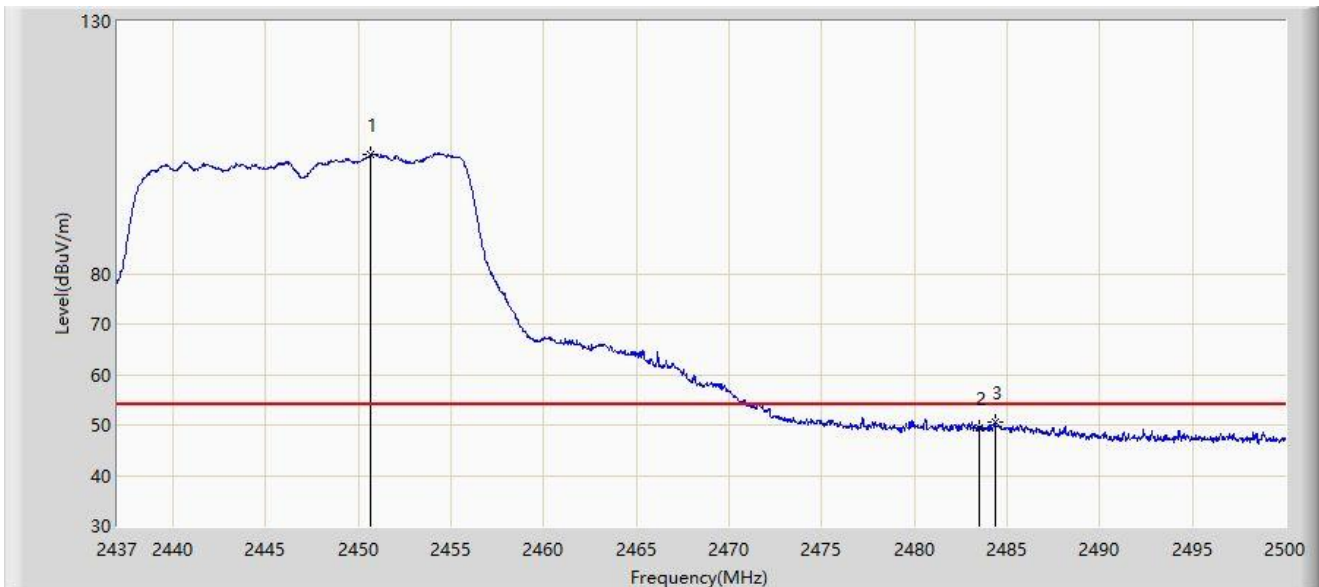


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2450.639        | 103.501                | 71.723               | N/A         | N/A            | 31.778        | AV   |
| 2  |      | 2483.500        | 49.435                 | 17.563               | -4.565      | 54.000         | 31.872        | AV   |
| 3  | *    | 2484.376        | 50.439                 | 18.567               | -3.561      | 54.000         | 31.872        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 21:01 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at 2447MHz |                          |

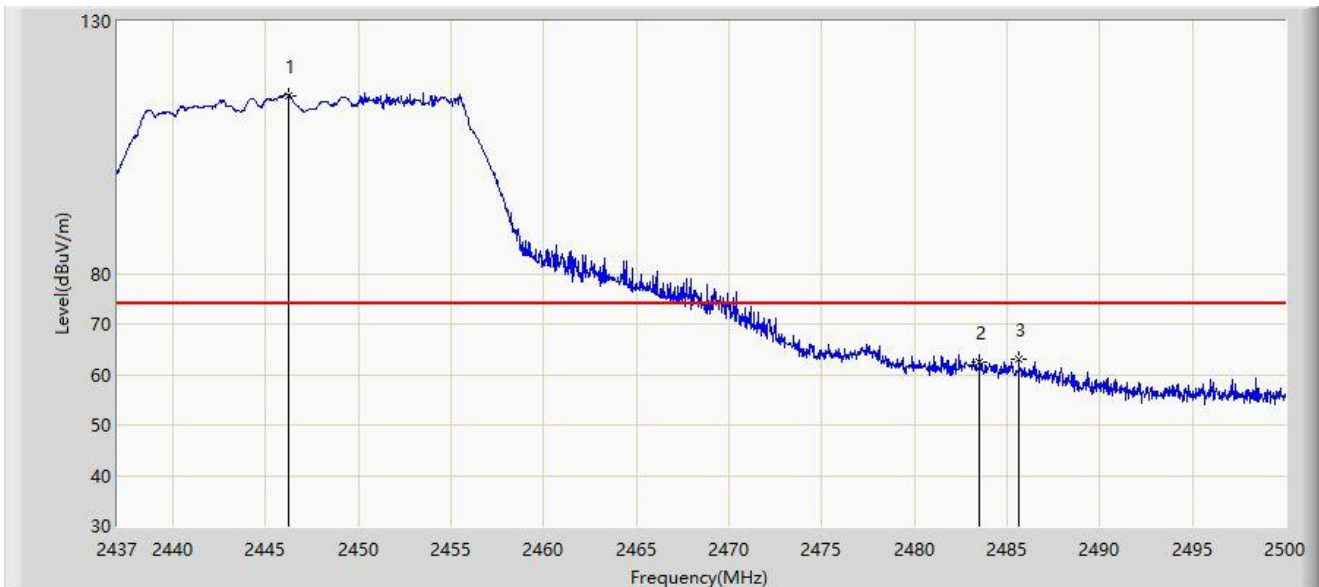


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2446.261        | 115.296                | 83.542               | N/A         | N/A            | 31.754        | PK   |
| 2  |      | 2483.500        | 62.544                 | 30.672               | -11.456     | 74.000         | 31.872        | PK   |
| 3  | *    | 2485.636        | 63.095                 | 31.223               | -10.905     | 74.000         | 31.872        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 20:56 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at 2447MHz |                          |

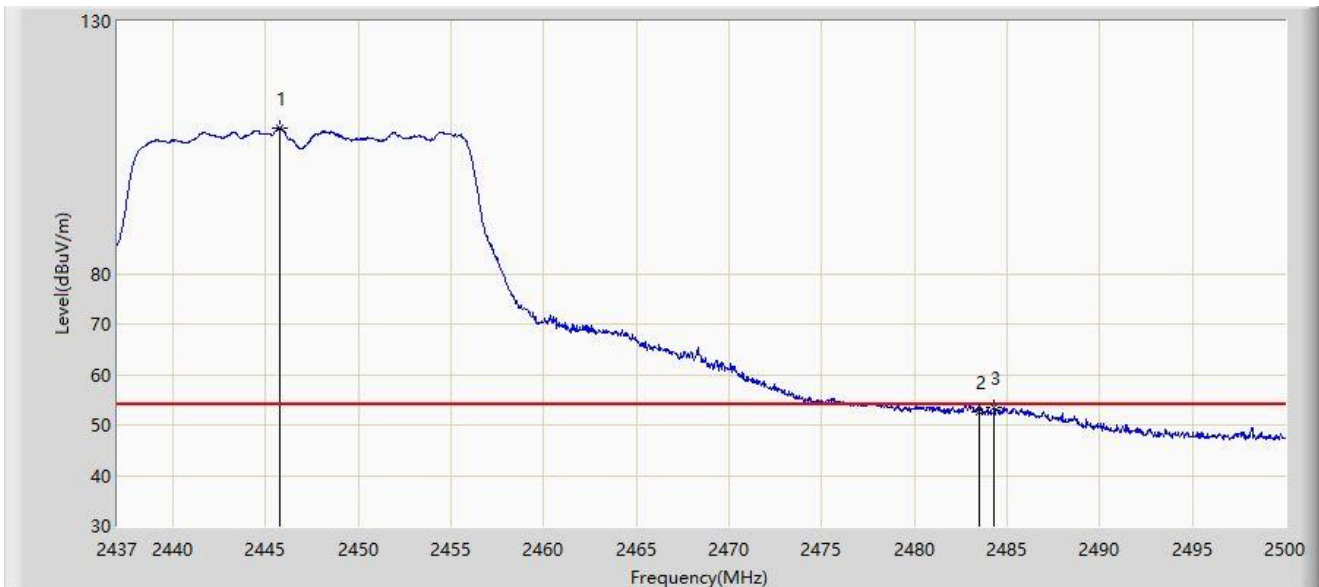


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2445.789        | 108.779                | 77.027               | N/A         | N/A            | 31.751        | AV   |
| 2  |      | 2483.500        | 52.633                 | 20.761               | -1.367      | 54.000         | 31.872        | AV   |
| 3  | *    | 2484.313        | 53.615                 | 21.743               | -0.385      | 54.000         | 31.872        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 18:15 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at 2452MHz |                          |

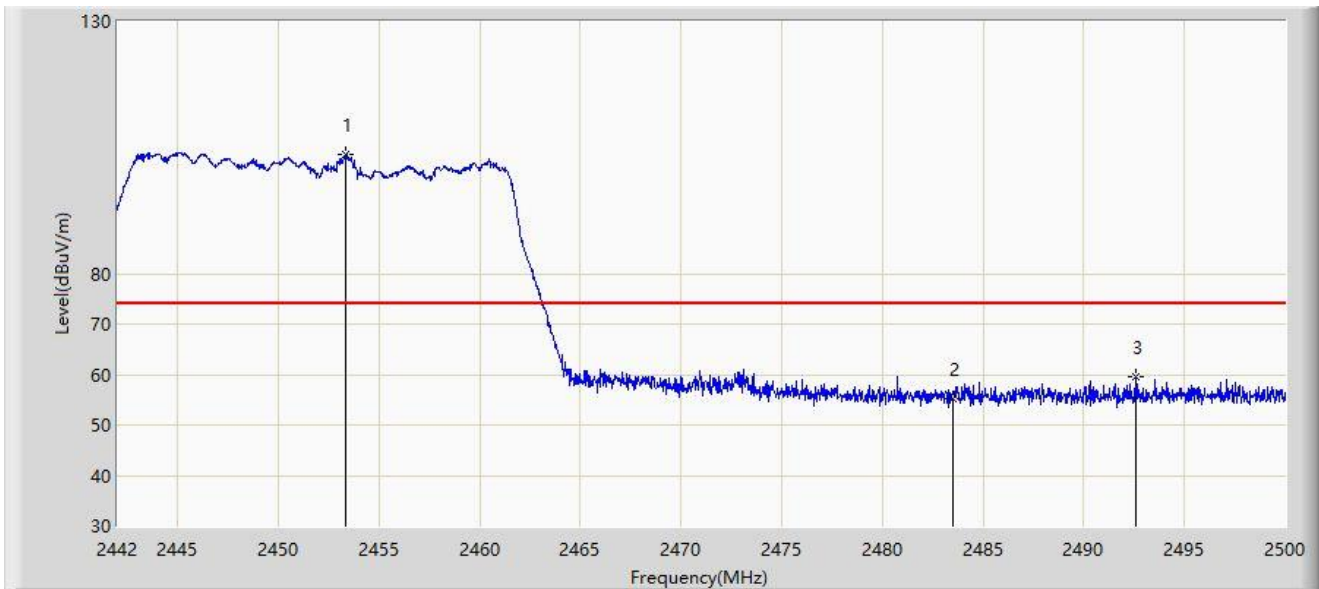


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2453.368        | 103.528                | 71.735               | N/A         | N/A            | 31.792        | PK   |
| 2  |      | 2483.500        | 55.165                 | 23.293               | -18.835     | 74.000         | 31.872        | PK   |
| 3  | *    | 2492.605        | 59.424                 | 27.555               | -14.576     | 74.000         | 31.870        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 18:13 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at 2452MHz |                          |

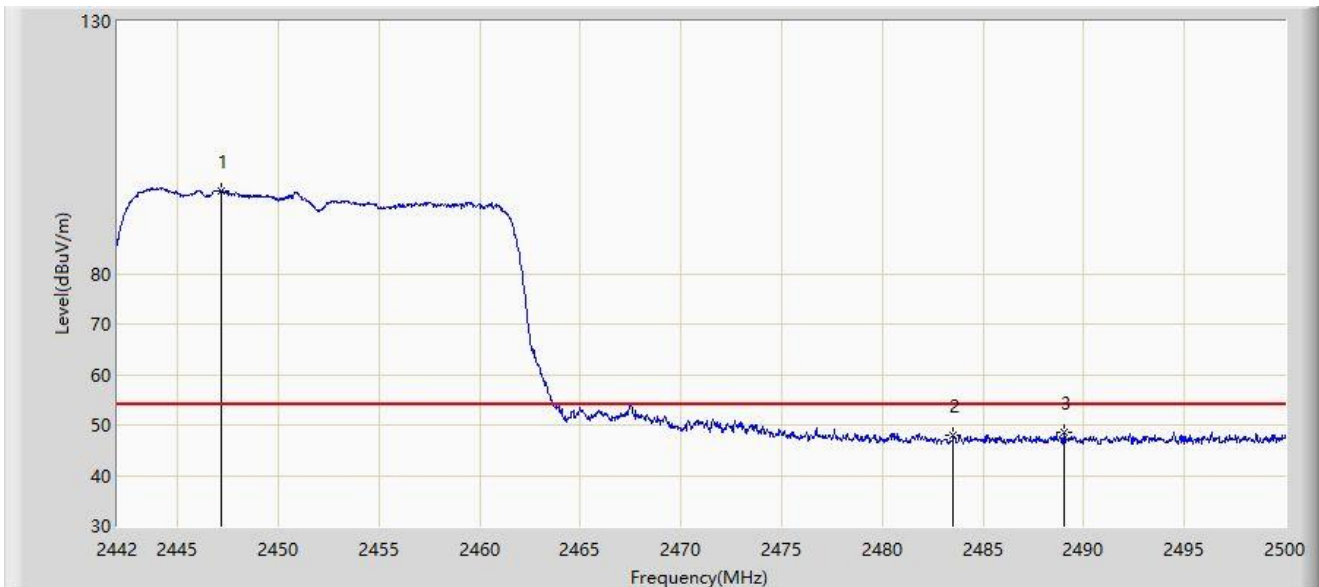


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2447.191        | 96.364                 | 64.605               | N/A         | N/A            | 31.759        | AV   |
| 2  |      | 2483.500        | 47.996                 | 16.124               | -6.004      | 54.000         | 31.872        | AV   |
| 3  | *    | 2489.038        | 48.542                 | 16.671               | -5.458      | 54.000         | 31.870        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 18:11 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at 2452MHz |                          |

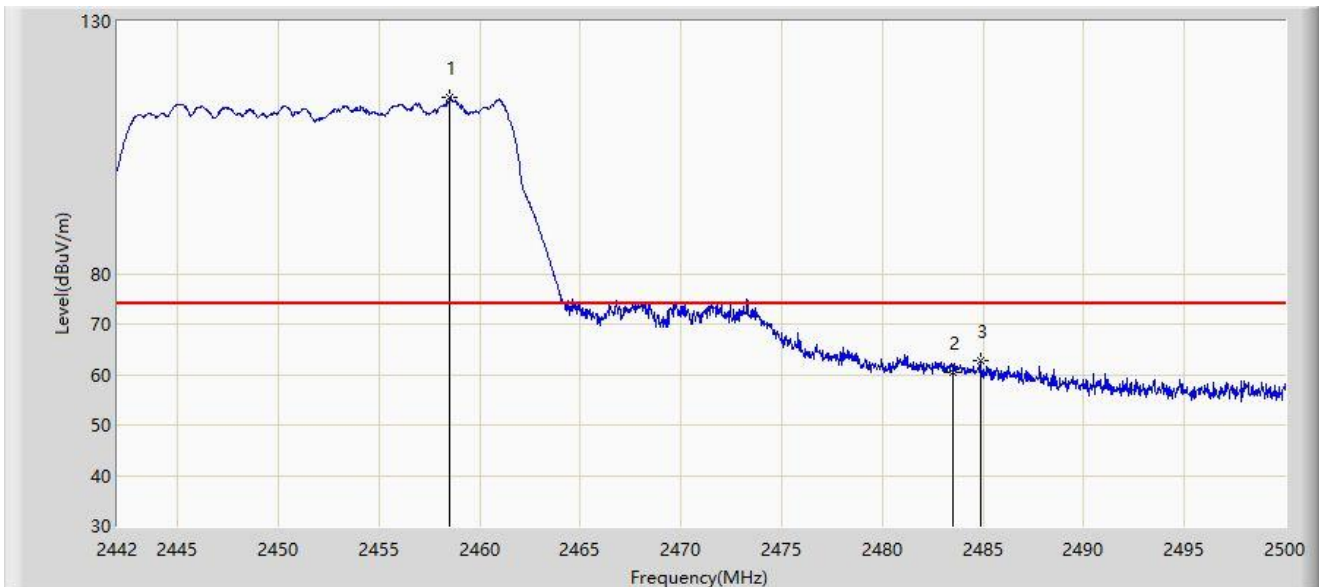


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2458.501        | 114.852                | 83.032               | N/A         | N/A            | 31.820        | PK   |
| 2  |      | 2483.500        | 60.503                 | 28.631               | -13.497     | 74.000         | 31.872        | PK   |
| 3  | *    | 2484.862        | 62.661                 | 30.789               | -11.339     | 74.000         | 31.872        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 18:08 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at 2452MHz |                          |

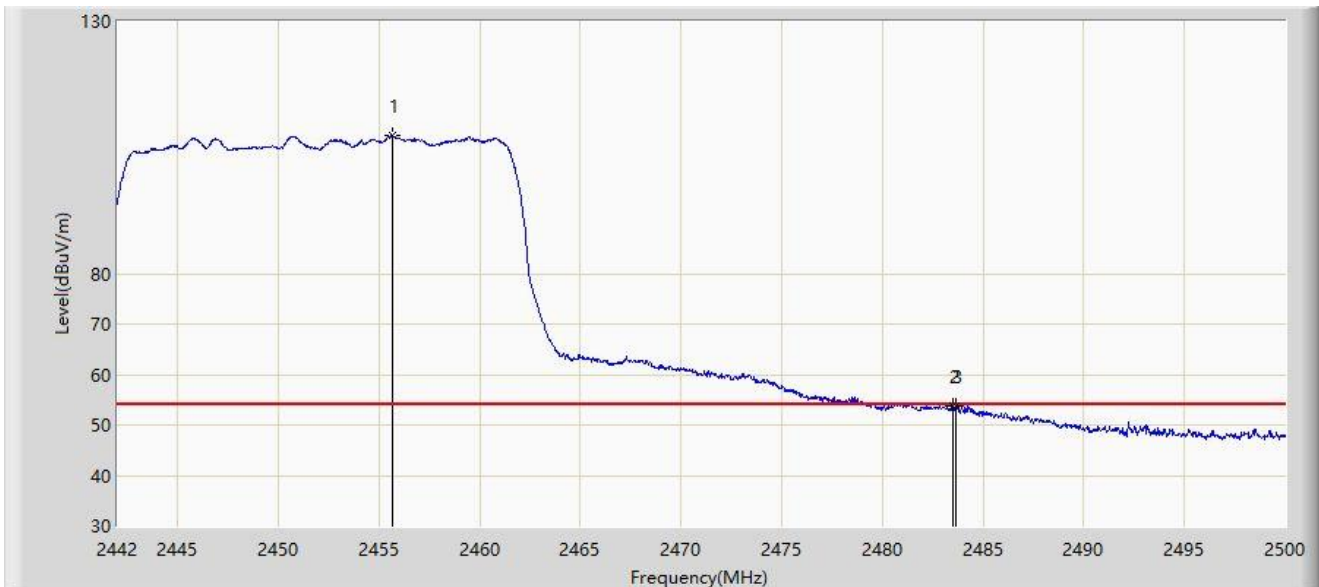


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2455.688        | 107.248                | 75.443               | N/A         | N/A            | 31.805        | AV   |
| 2  |      | 2483.500        | 53.624                 | 21.752               | -0.376      | 54.000         | 31.872        | AV   |
| 3  | *    | 2483.673        | 53.895                 | 22.023               | -0.105      | 54.000         | 31.872        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 01:06 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at 2457MHz |                          |

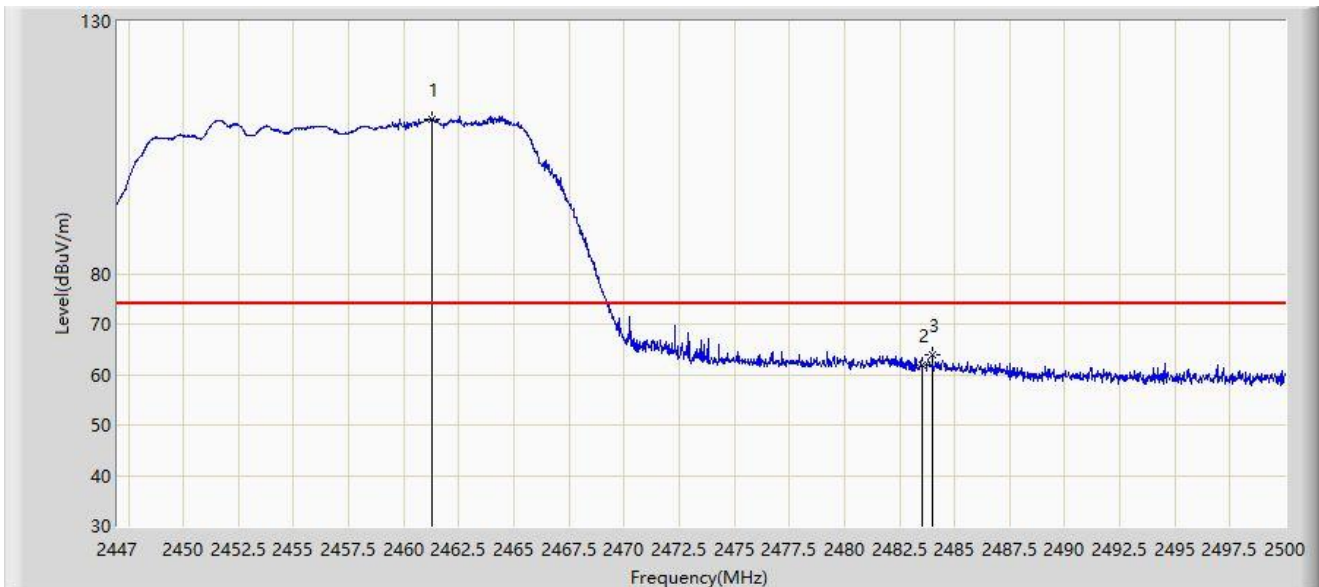


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2461.310        | 110.710                | 78.875               | N/A         | N/A            | 31.836        | PK   |
| 2  |      | 2483.500        | 61.764                 | 29.892               | -12.236     | 74.000         | 31.872        | PK   |
| 3  | *    | 2483.994        | 63.938                 | 32.066               | -10.062     | 74.000         | 31.873        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 01:03 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at 2457MHz |                          |

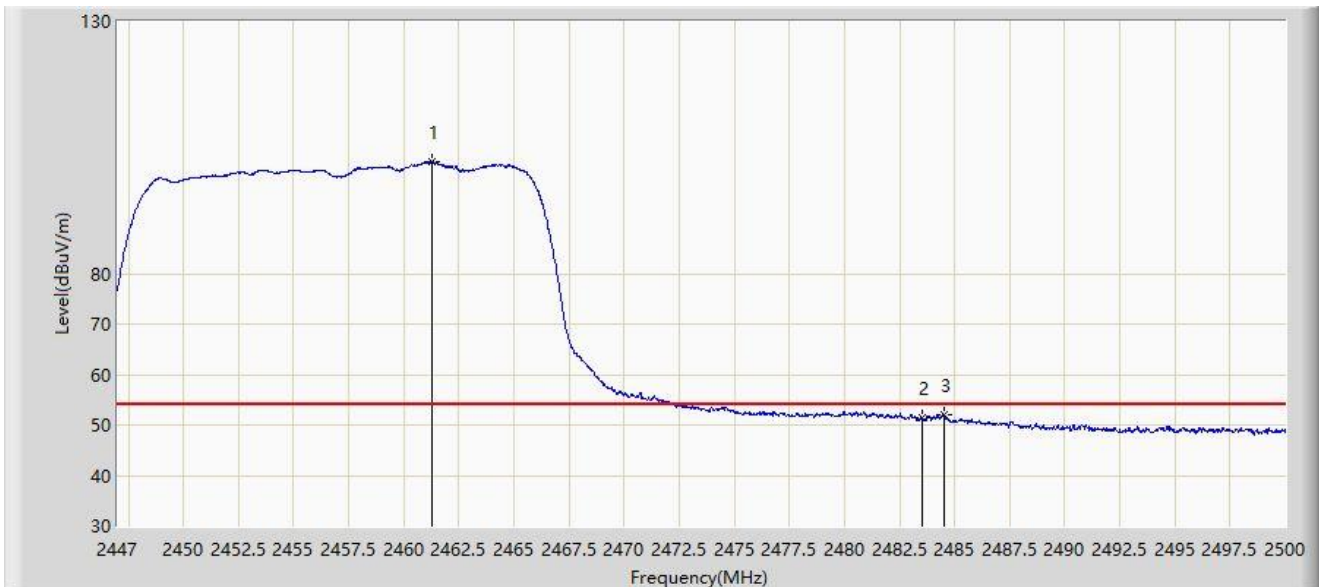


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2461.257        | 102.274                | 70.439               | N/A         | N/A            | 31.835        | AV   |
| 2  |      | 2483.500        | 51.317                 | 19.445               | -2.683      | 54.000         | 31.872        | AV   |
| 3  | *    | 2484.551        | 51.889                 | 20.017               | -2.111      | 54.000         | 31.872        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 01:02 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at 2457MHz |                          |

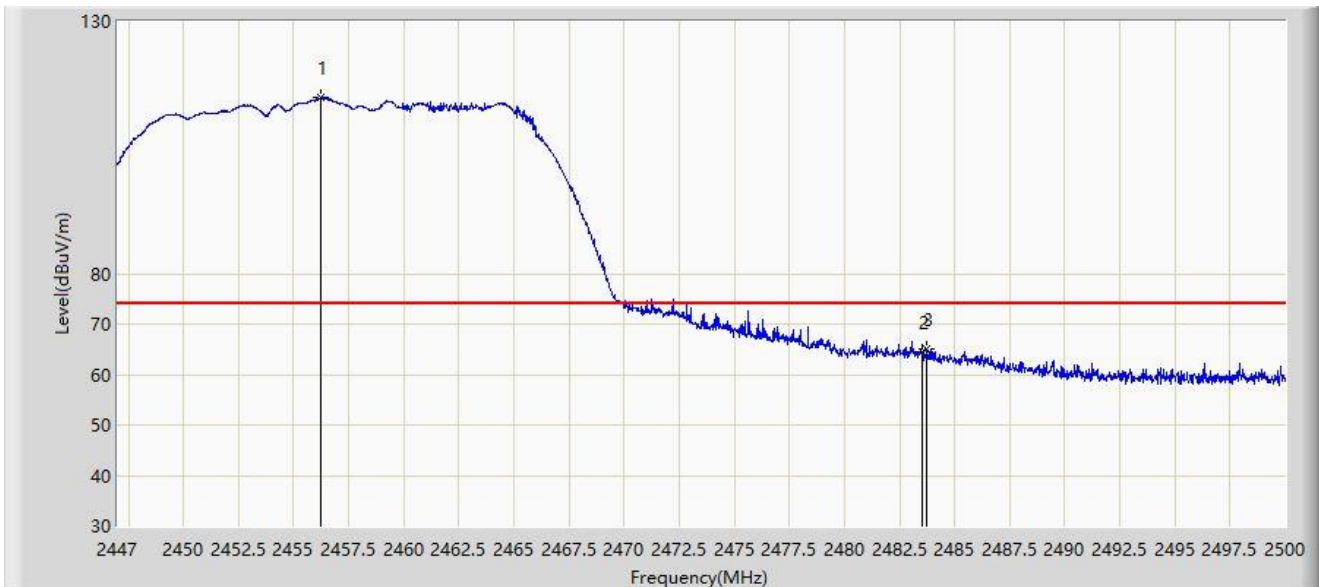


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2456.249        | 114.960                | 83.152               | N/A         | N/A            | 31.808        | PK   |
| 2  |      | 2483.500        | 64.448                 | 32.576               | -9.552      | 74.000         | 31.872        | PK   |
| 3  | *    | 2483.756        | 65.126                 | 33.254               | -8.874      | 74.000         | 31.872        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 00:56 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at 2457MHz |                          |

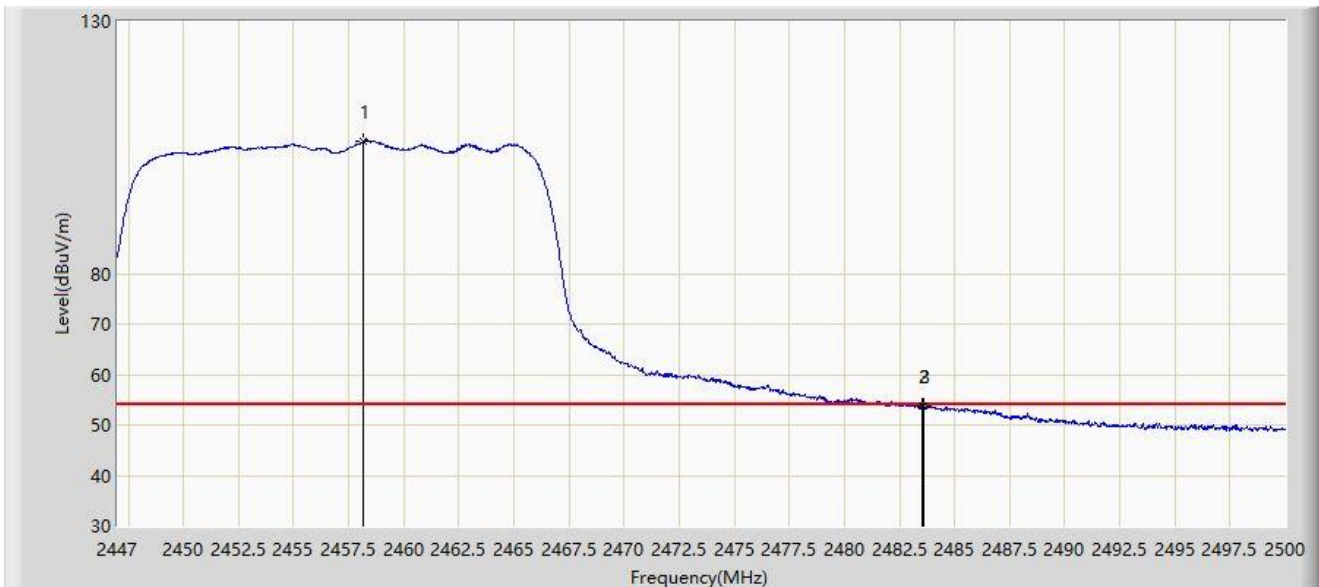


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2458.156        | 106.242                | 74.424               | N/A         | N/A            | 31.818        | AV   |
| 2  |      | 2483.500        | 53.685                 | 21.813               | -0.315      | 54.000         | 31.872        | AV   |
| 3  | *    | 2483.623        | 53.718                 | 21.846               | -0.282      | 54.000         | 31.873        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 00:54 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at 2462MHz |                          |

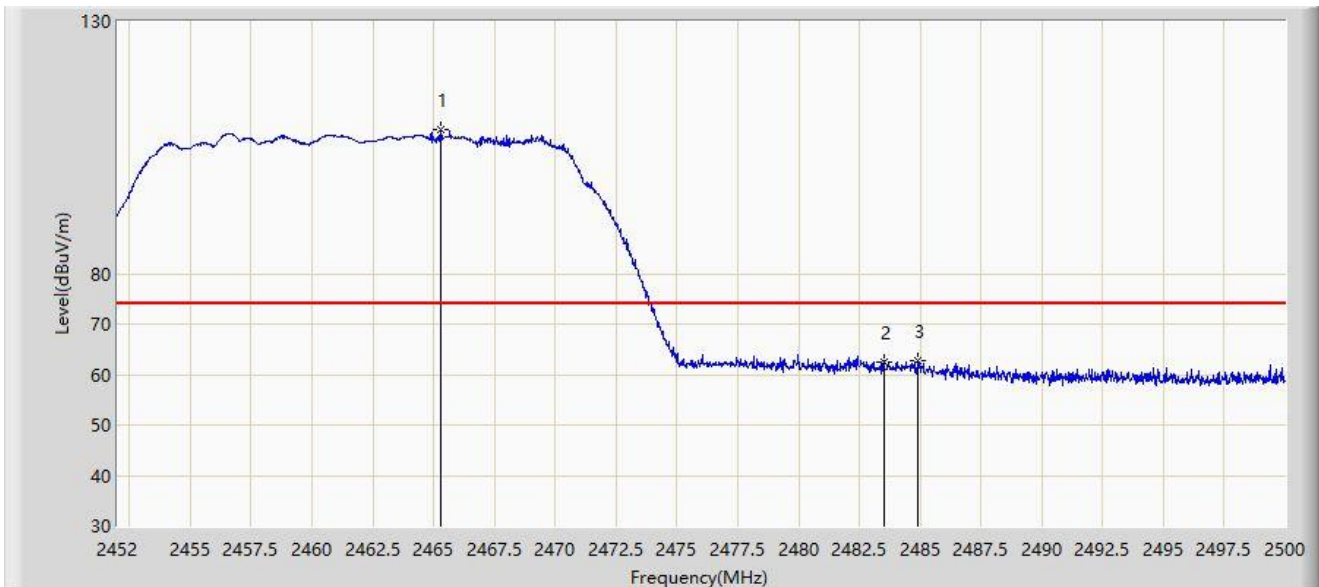


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2465.320        | 108.485                | 76.639               | N/A         | N/A            | 31.846        | PK   |
| 2  |      | 2483.500        | 62.369                 | 30.497               | -11.631     | 74.000         | 31.872        | PK   |
| 3  | *    | 2484.880        | 62.646                 | 30.774               | -11.354     | 74.000         | 31.872        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 00:51 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at 2462MHz |                          |

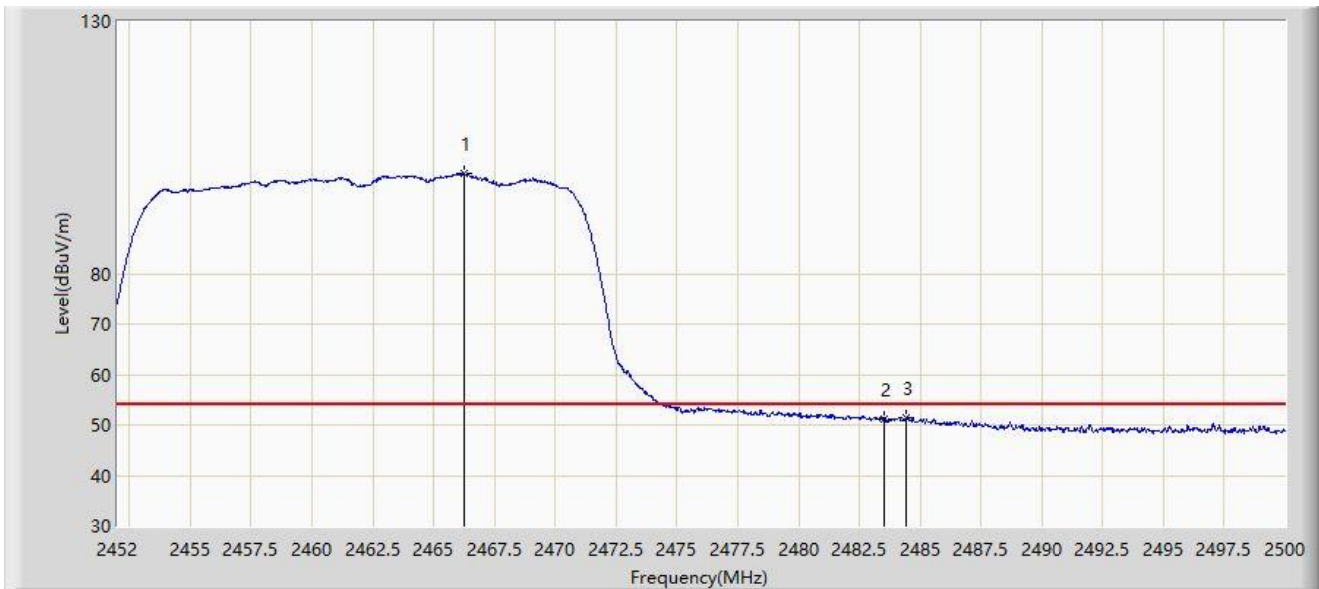


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2466.232        | 99.808                 | 67.960               | N/A         | N/A            | 31.848        | AV   |
| 2  |      | 2483.500        | 51.177                 | 19.305               | -2.823      | 54.000         | 31.872        | AV   |
| 3  | *    | 2484.448        | 51.533                 | 19.661               | -2.467      | 54.000         | 31.872        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 00:49 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at 2462MHz |                          |

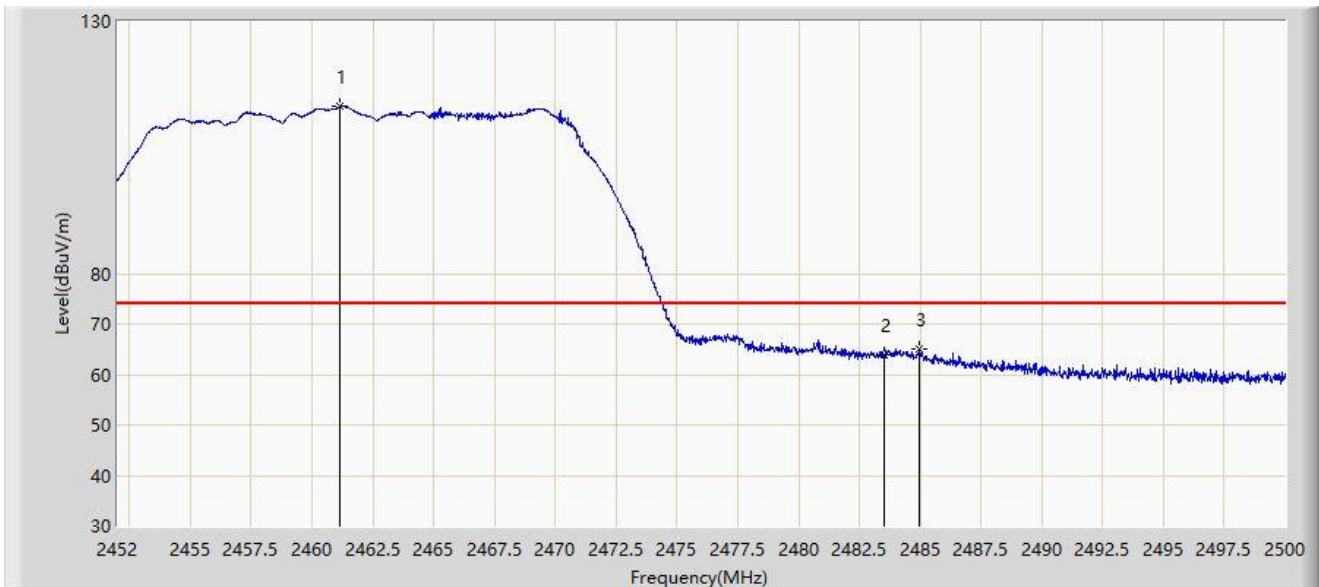


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2461.120        | 113.075                | 81.241               | N/A         | N/A            | 31.834        | PK   |
| 2  |      | 2483.500        | 64.027                 | 32.155               | -9.973      | 74.000         | 31.872        | PK   |
| 3  | *    | 2484.976        | 65.075                 | 33.203               | -8.925      | 74.000         | 31.872        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 00:47 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at 2462MHz |                          |

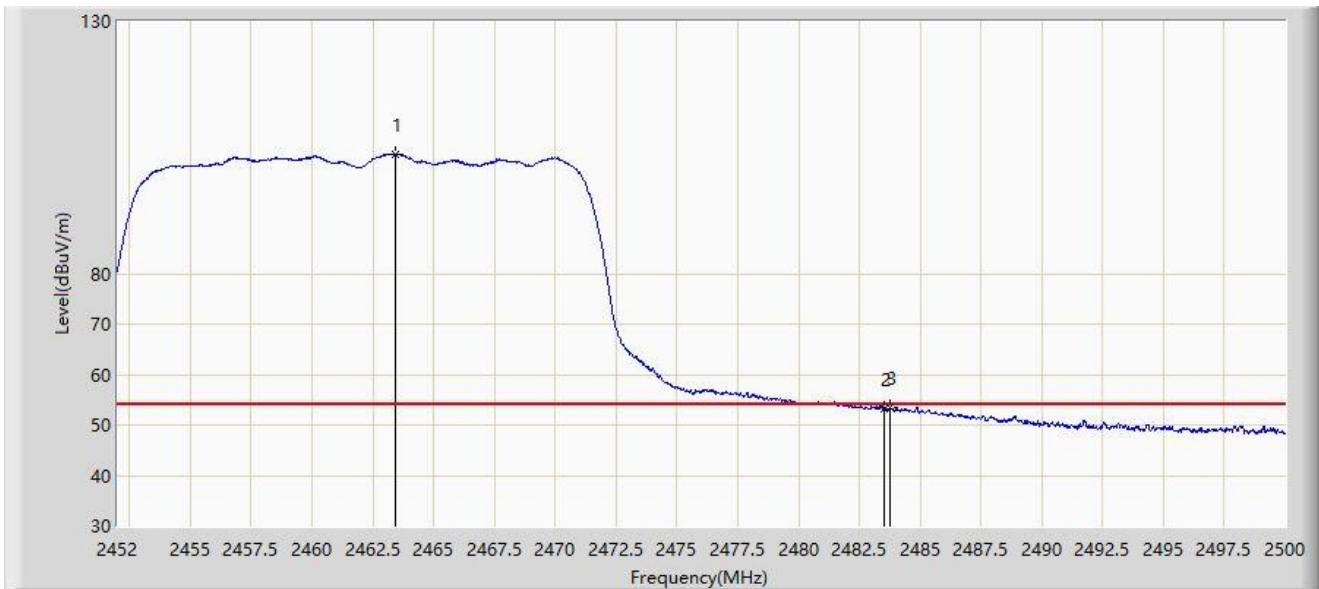


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2463.448        | 103.760                | 71.918               | N/A         | N/A            | 31.842        | AV   |
| 2  |      | 2483.500        | 53.246                 | 21.374               | -0.754      | 54.000         | 31.872        | AV   |
| 3  | *    | 2483.776        | 53.515                 | 21.643               | -0.485      | 54.000         | 31.872        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 16:51 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at 2422MHz |                          |

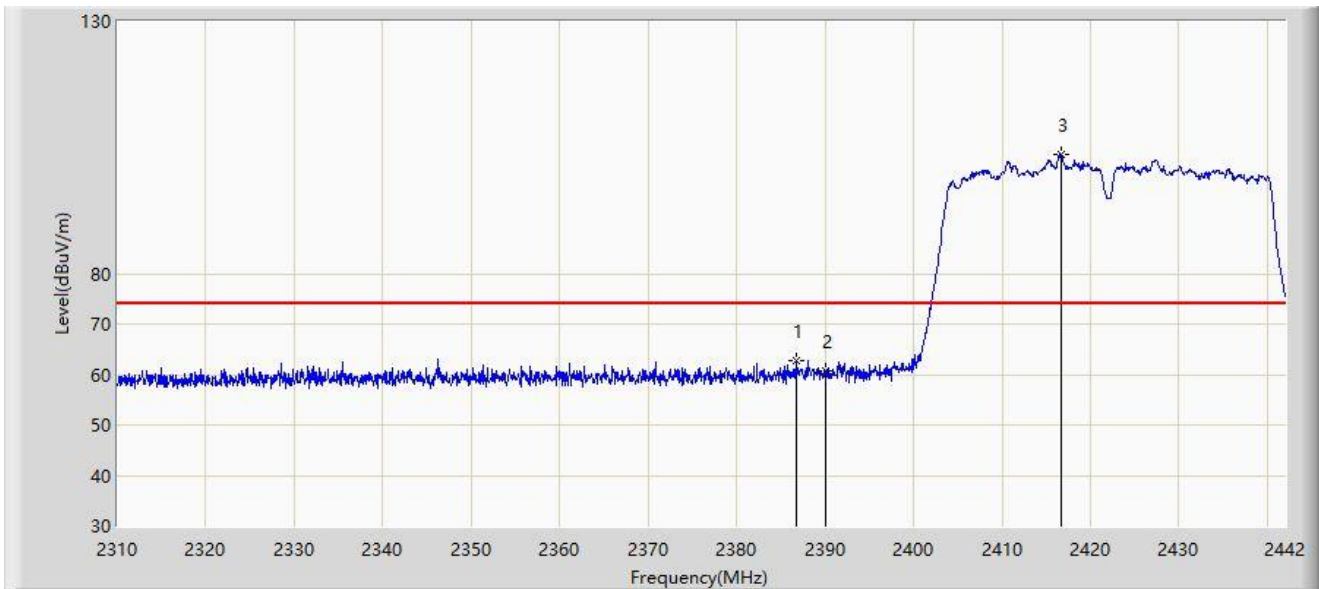


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2386.824        | 62.613                 | 31.083               | -11.387     | 74.000         | 31.530        | PK   |
| 2  |      | 2390.000        | 60.604                 | 29.015               | -13.396     | 74.000         | 31.588        | PK   |
| 3  |      | 2416.656        | 103.642                | 71.951               | N/A         | N/A            | 31.691        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 16:53 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at 2422MHz |                          |

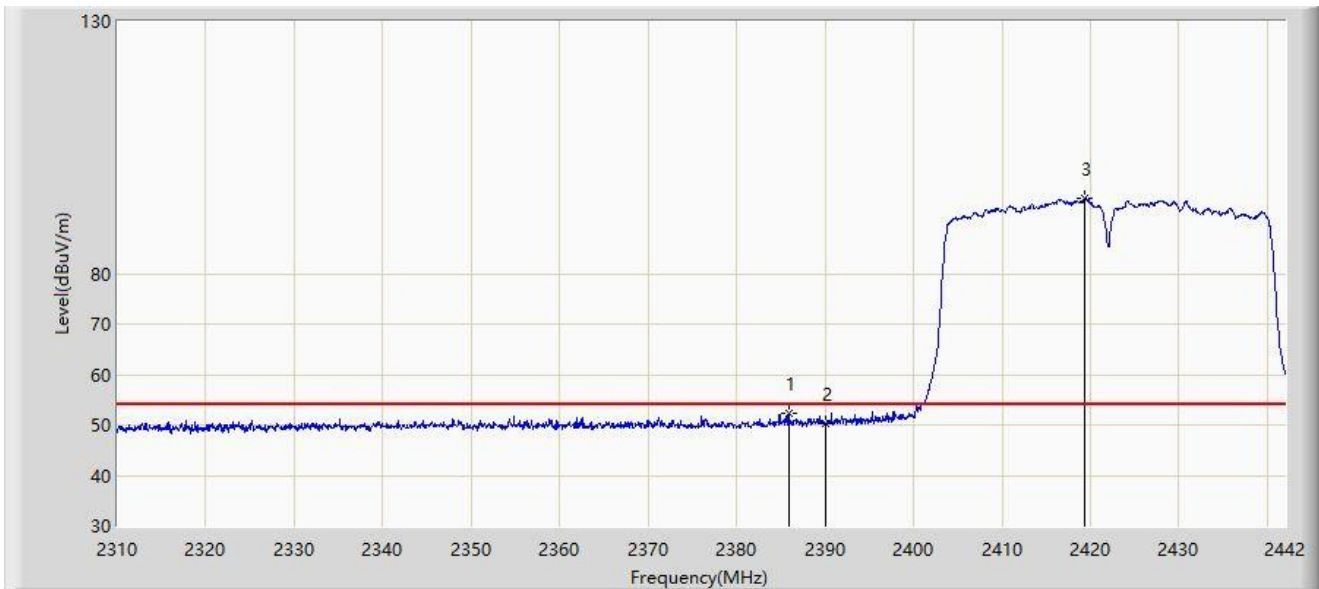


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2385.900        | 52.293                 | 20.780               | -1.707      | 54.000         | 31.513        | AV   |
| 2  |      | 2390.000        | 50.231                 | 18.642               | -3.769      | 54.000         | 31.588        | AV   |
| 3  |      | 2419.296        | 94.853                 | 63.158               | N/A         | N/A            | 31.695        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 16:50 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at 2422MHz |                          |

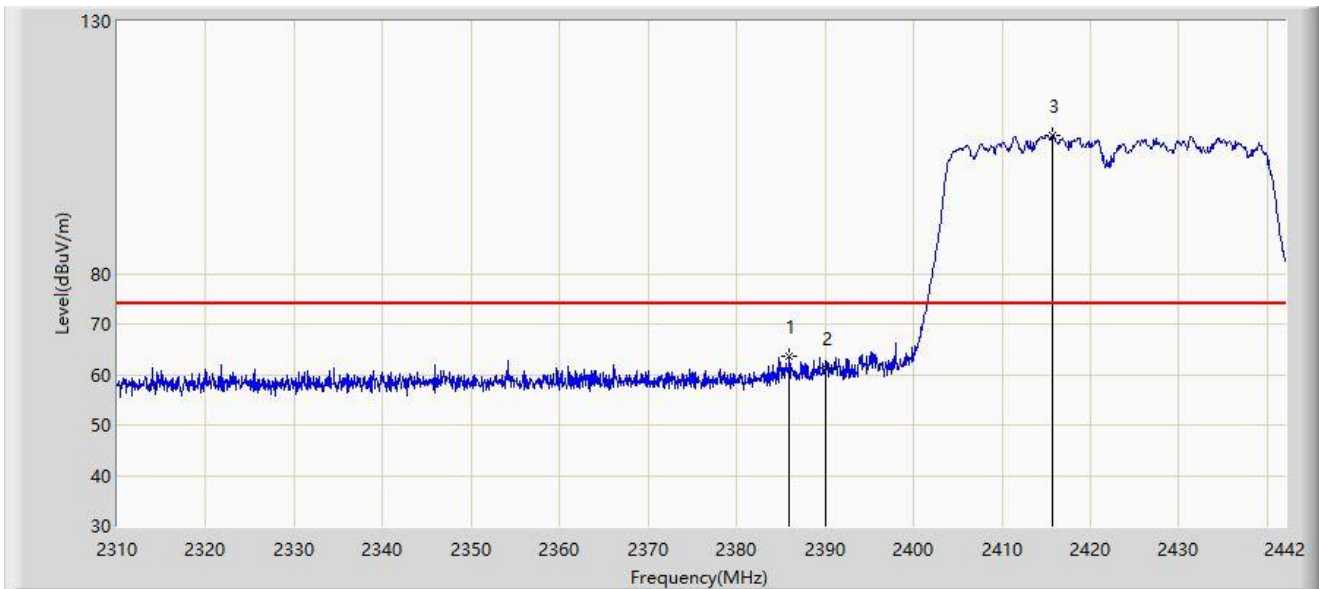


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2385.966        | 63.655                 | 32.141               | -10.345     | 74.000         | 31.514        | PK   |
| 2  |      | 2390.000        | 61.377                 | 29.788               | -12.623     | 74.000         | 31.588        | PK   |
| 3  |      | 2415.732        | 107.488                | 75.798               | N/A         | N/A            | 31.690        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 16:49 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at 2422MHz |                          |

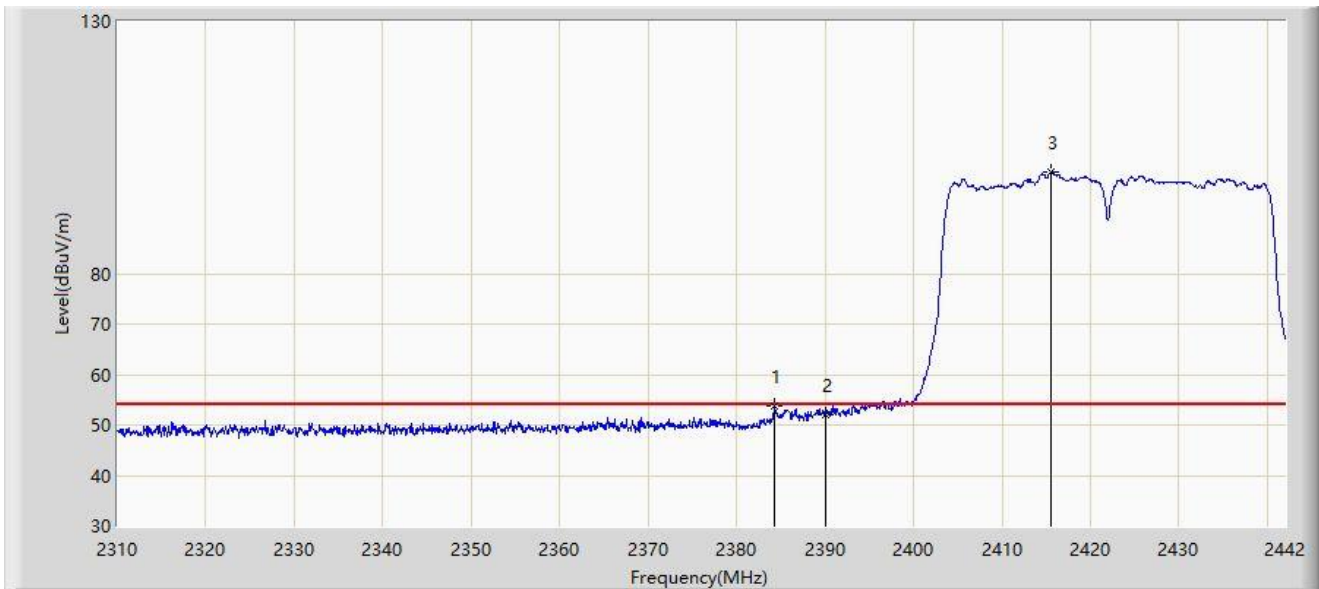


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2384.316        | 53.703                 | 22.219               | -0.297      | 54.000         | 31.484        | AV   |
| 2  |      | 2390.000        | 52.114                 | 20.525               | -1.886      | 54.000         | 31.588        | AV   |
| 3  |      | 2415.468        | 100.135                | 68.445               | N/A         | N/A            | 31.689        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 22:19 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at 2437MHz |                          |

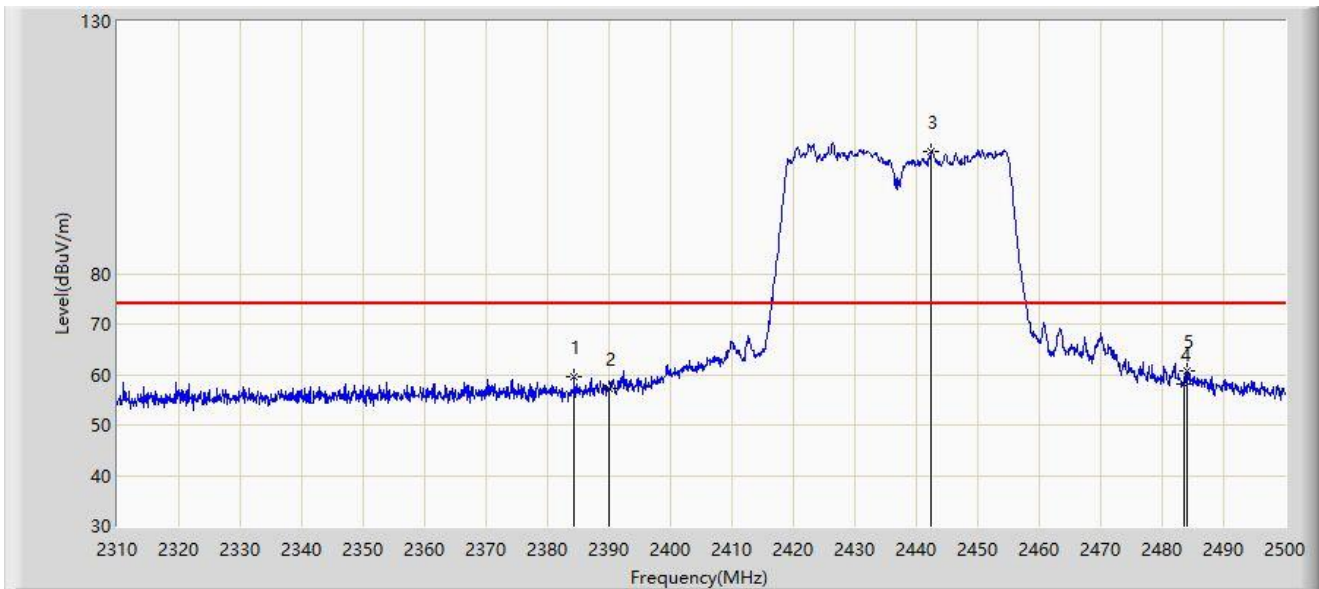


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2384.385        | 59.434                 | 27.949               | -14.566     | 74.000         | 31.485        | PK   |
| 2  |      | 2390.000        | 57.257                 | 25.668               | -16.743     | 74.000         | 31.588        | PK   |
| 3  |      | 2442.430        | 104.185                | 72.444               | N/A         | N/A            | 31.741        | PK   |
| 4  |      | 2483.500        | 58.012                 | 26.140               | -15.988     | 74.000         | 31.872        | PK   |
| 5  | *    | 2484.135        | 60.724                 | 28.852               | -13.276     | 74.000         | 31.872        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 22:17 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at 2437MHz |                          |

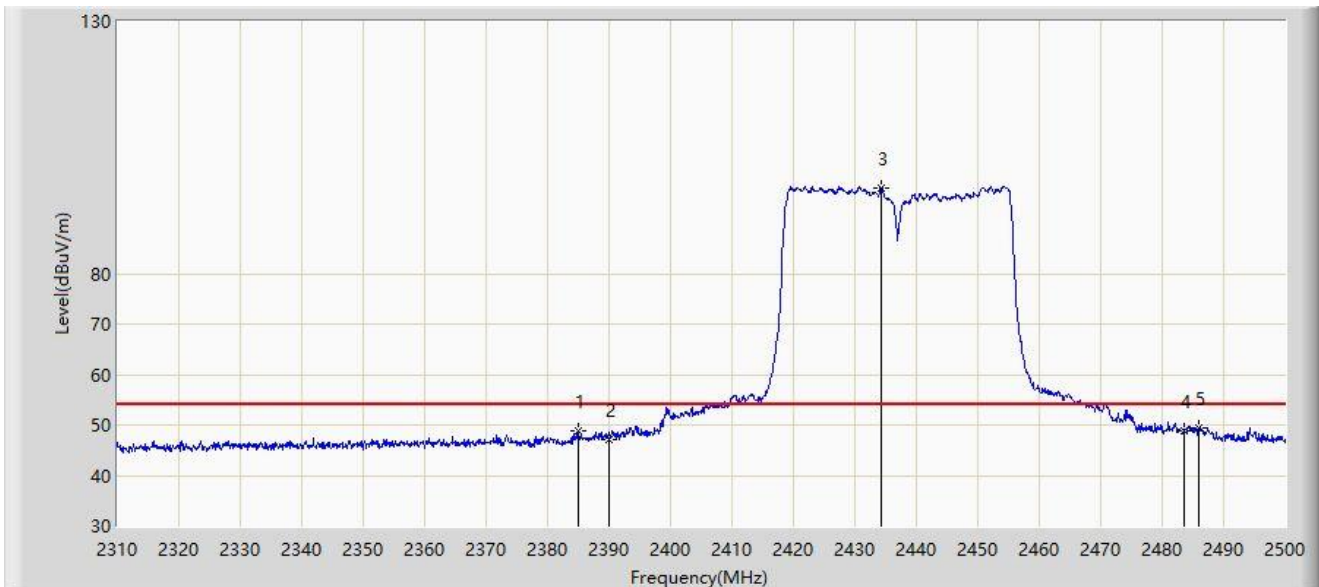


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2385.050        | 48.851                 | 17.354               | -5.149      | 54.000         | 31.497        | AV   |
| 2  |      | 2390.000        | 47.123                 | 15.534               | -6.877      | 54.000         | 31.588        | AV   |
| 3  |      | 2434.260        | 97.001                 | 65.279               | N/A         | N/A            | 31.722        | AV   |
| 4  |      | 2483.500        | 48.772                 | 16.900               | -5.228      | 54.000         | 31.872        | AV   |
| 5  | *    | 2486.035        | 49.497                 | 17.626               | -4.503      | 54.000         | 31.871        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 22:15 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at 2437MHz |                          |

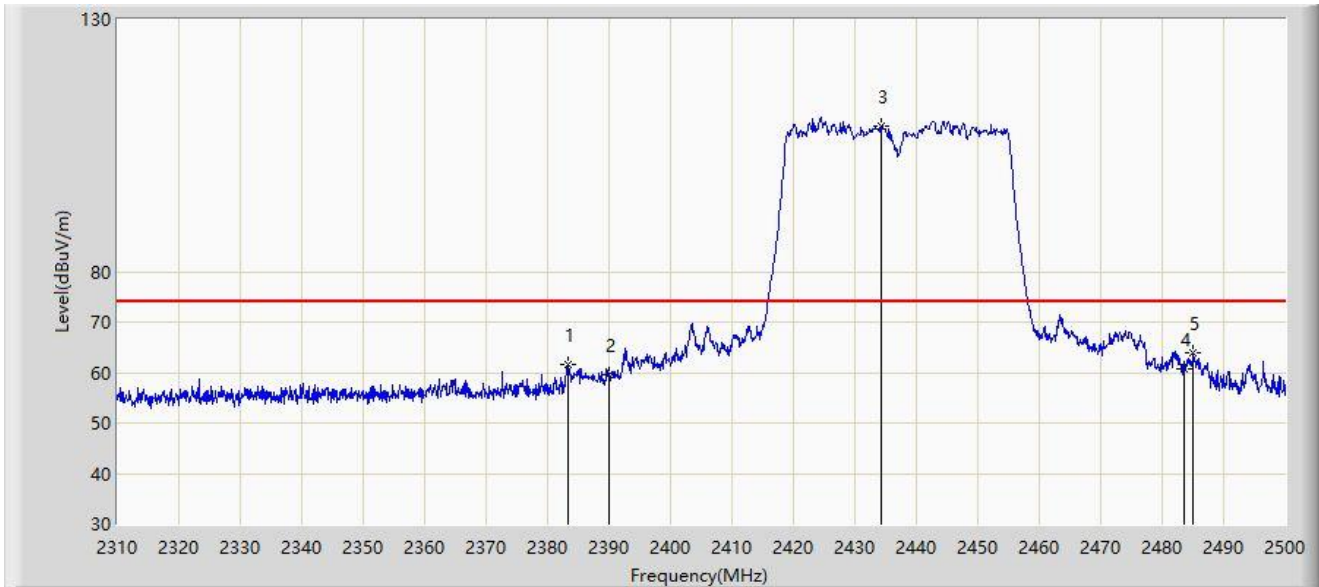


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2383.245        | 61.665                 | 30.201               | -12.335     | 74.000         | 31.464        | PK   |
| 2  |      | 2390.000        | 59.670                 | 28.081               | -14.330     | 74.000         | 31.588        | PK   |
| 3  |      | 2434.355        | 108.894                | 77.172               | N/A         | N/A            | 31.723        | PK   |
| 4  |      | 2483.500        | 60.802                 | 28.930               | -13.198     | 74.000         | 31.872        | PK   |
| 5  | *    | 2485.085        | 63.792                 | 31.920               | -10.208     | 74.000         | 31.871        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 22:05 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at 2437MHz |                          |

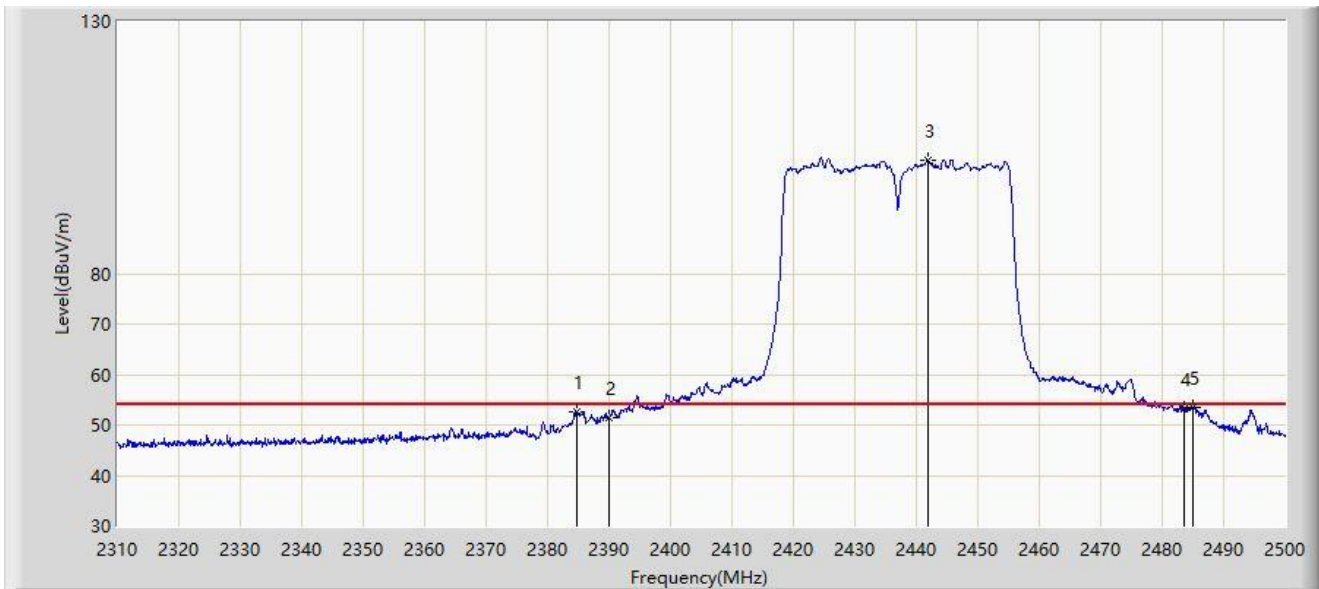

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2384.765        | 52.696                 | 21.204               | -1.304      | 54.000         | 31.492        | AV   |
| 2  |      | 2390.000        | 51.519                 | 19.930               | -2.481      | 54.000         | 31.588        | AV   |
| 3  |      | 2441.860        | 102.566                | 70.826               | N/A         | N/A            | 31.740        | AV   |
| 4  |      | 2483.500        | 53.320                 | 21.448               | -0.680      | 54.000         | 31.872        | AV   |
| 5  | *    | 2484.895        | 53.600                 | 21.728               | -0.400      | 54.000         | 31.872        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 23:14 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at 2442MHz |                          |




| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2428.279        | 104.066                | 72.358               | N/A         | N/A            | 31.708        | PK   |
| 2  |      | 2483.500        | 56.592                 | 24.720               | -17.408     | 74.000         | 31.872        | PK   |
| 3  | *    | 2486.272        | 59.792                 | 27.921               | -14.208     | 74.000         | 31.872        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 23:12 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at 2442MHz |                          |

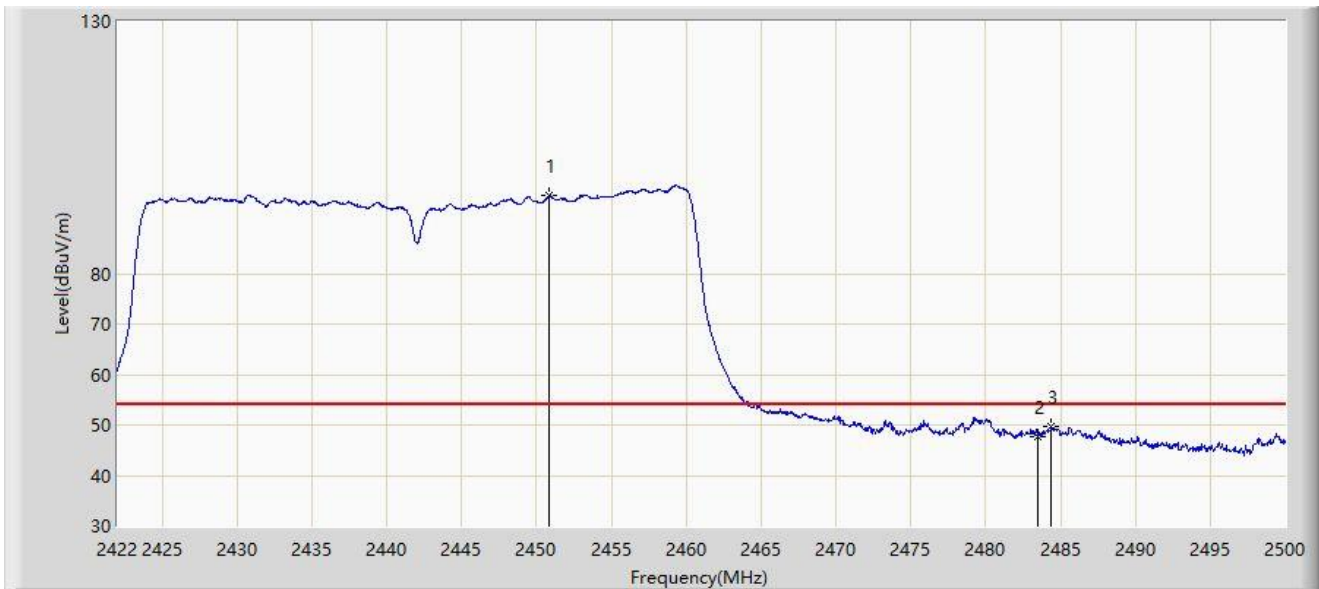

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2450.860        | 95.383                 | 63.604               | N/A         | N/A            | 31.779        | AV   |
| 2  |      | 2483.500        | 47.826                 | 15.954               | -6.174      | 54.000         | 31.872        | AV   |
| 3  | *    | 2484.361        | 49.568                 | 17.696               | -4.432      | 54.000         | 31.872        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 23:11 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at 2442MHz |                          |




| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2450.236        | 109.713                | 77.937               | N/A         | N/A            | 31.775        | PK   |
| 2  |      | 2483.500        | 61.174                 | 29.302               | -12.826     | 74.000         | 31.872        | PK   |
| 3  | *    | 2483.893        | 62.175                 | 30.303               | -11.825     | 74.000         | 31.872        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 23:07 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at 2442MHz |                          |

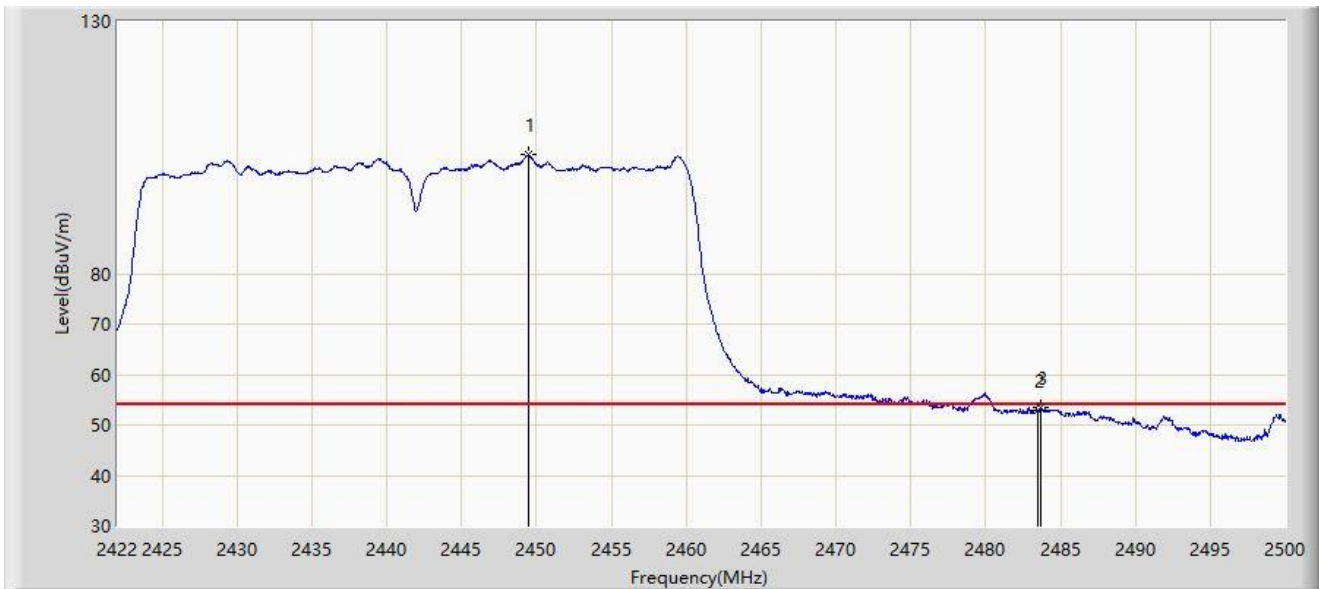


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2449.456        | 103.480                | 71.709               | N/A         | N/A            | 31.772        | AV   |
| 2  |      | 2483.500        | 52.844                 | 20.972               | -1.156      | 54.000         | 31.872        | AV   |
| 3  | *    | 2483.659        | 53.418                 | 21.546               | -0.582      | 54.000         | 31.873        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 22:43 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at 2447MHz |                          |

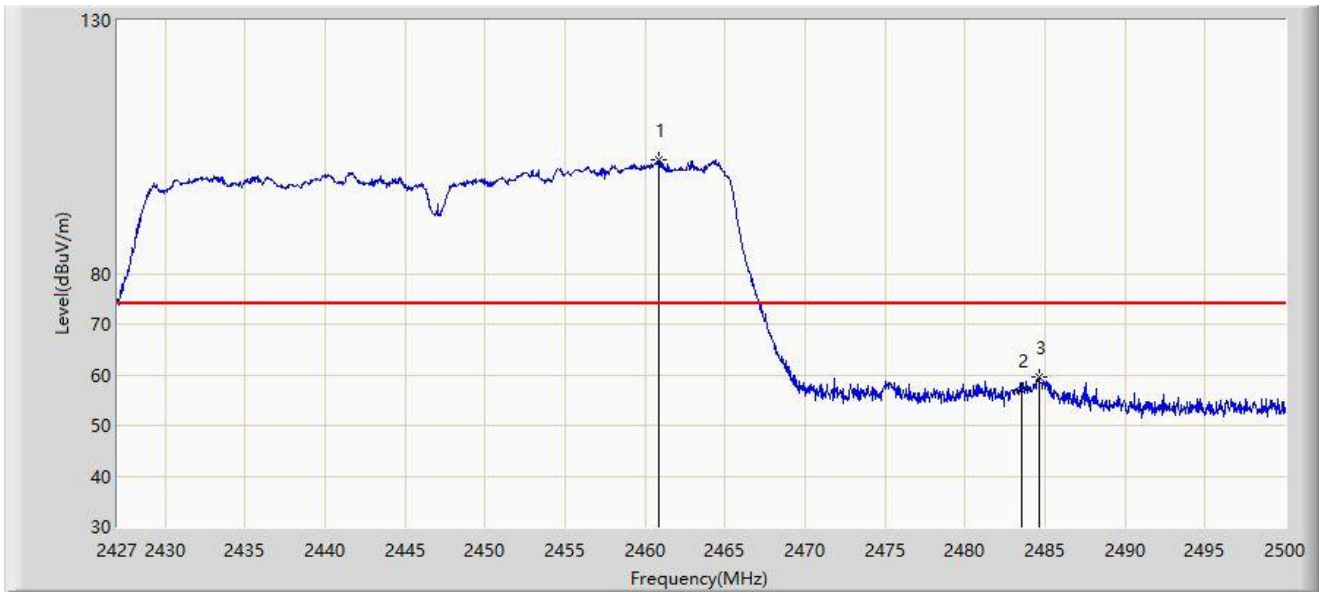


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2460.835        | 102.529                | 70.696               | N/A         | N/A            | 31.833        | PK   |
| 2  |      | 2483.500        | 56.872                 | 25.000               | -17.128     | 74.000         | 31.872        | PK   |
| 3  | *    | 2484.634        | 59.531                 | 27.659               | -14.469     | 74.000         | 31.872        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 22:41 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at 2447MHz |                          |

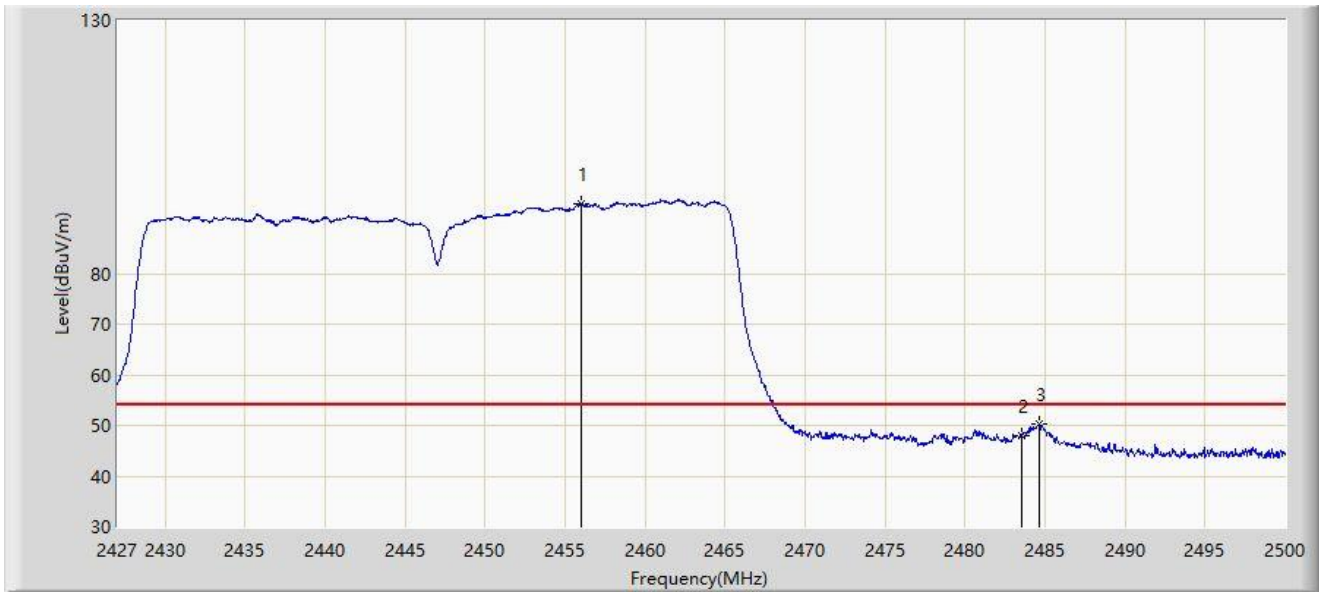


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2456.018        | 93.903                 | 62.096               | N/A         | N/A            | 31.807        | AV   |
| 2  |      | 2483.500        | 47.874                 | 16.002               | -6.126      | 54.000         | 31.872        | AV   |
| 3  | *    | 2484.634        | 50.189                 | 18.317               | -3.811      | 54.000         | 31.872        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 22:40 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at 2447MHz |                          |

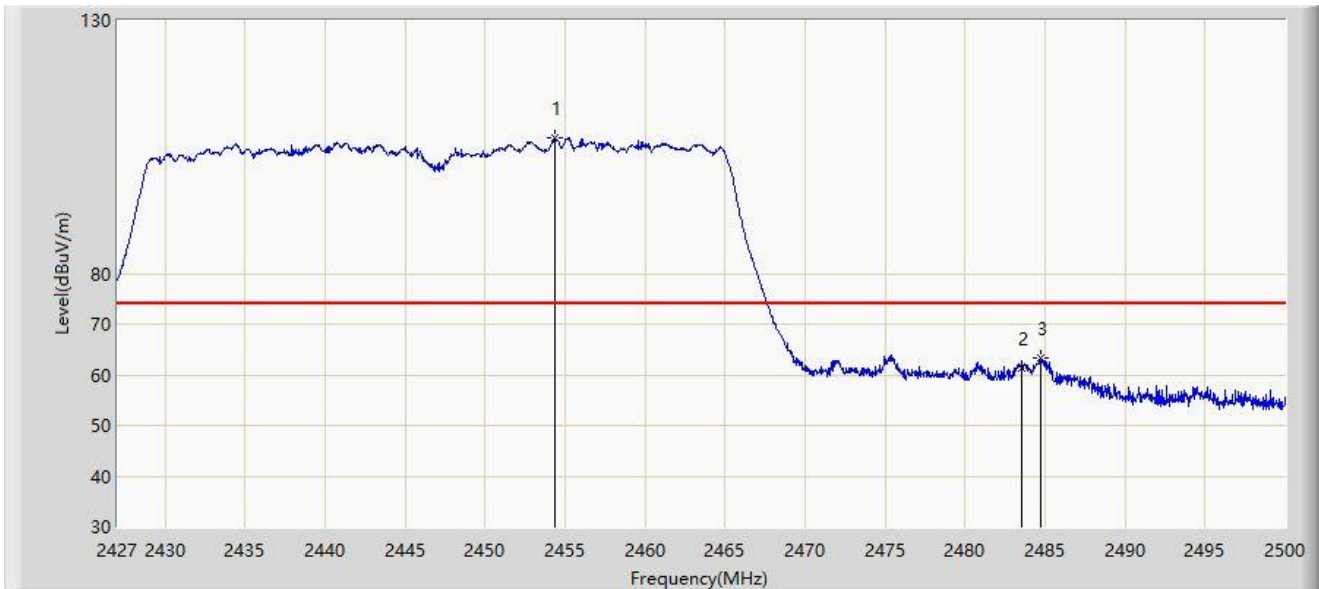


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2454.375        | 106.740                | 74.942               | N/A         | N/A            | 31.798        | PK   |
| 2  |      | 2483.500        | 61.187                 | 29.315               | -12.813     | 74.000         | 31.872        | PK   |
| 3  | *    | 2484.707        | 63.312                 | 31.440               | -10.688     | 74.000         | 31.871        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 22:34 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at 2447MHz |                          |

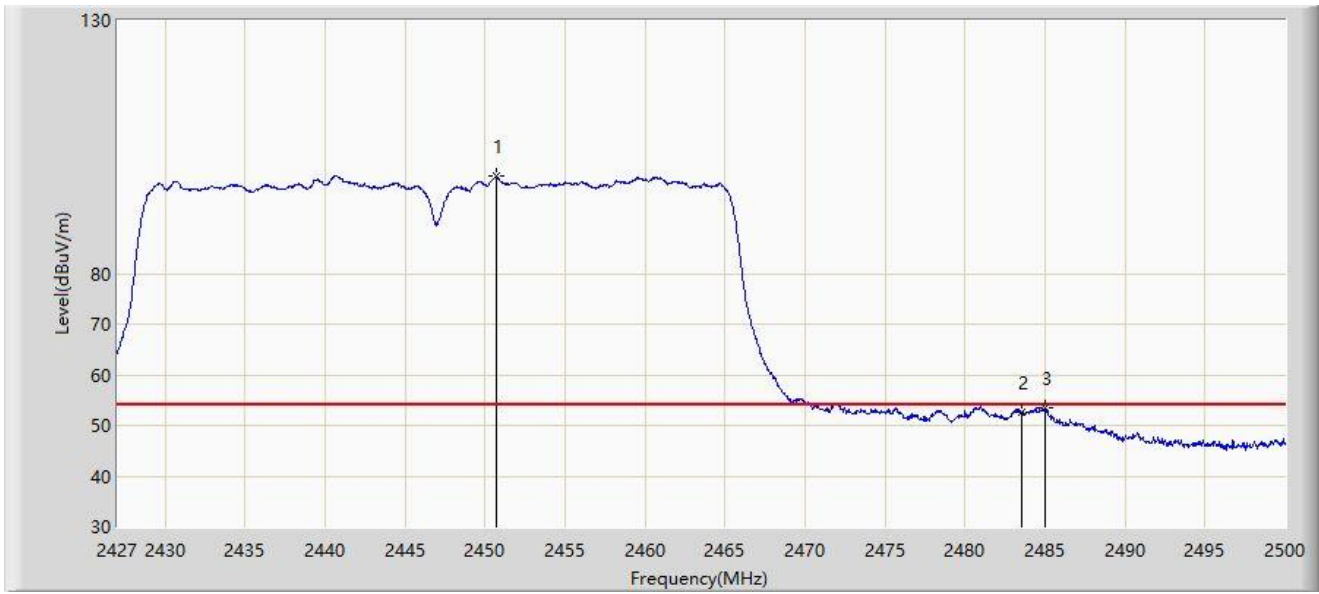


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2450.652        | 99.167                 | 67.389               | N/A         | N/A            | 31.778        | AV   |
| 2  |      | 2483.500        | 52.547                 | 20.675               | -1.453      | 54.000         | 31.872        | AV   |
| 3  | *    | 2485.035        | 53.533                 | 21.661               | -0.467      | 54.000         | 31.871        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 17:11 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at 2452MHz |                          |

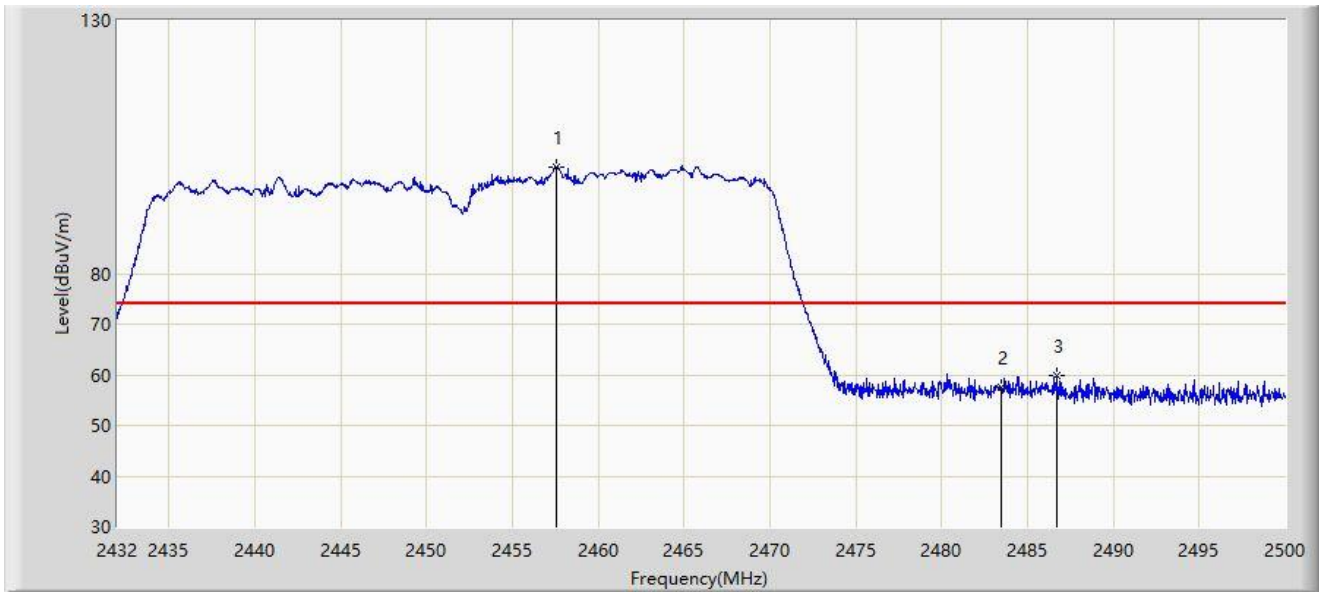


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2457.534        | 100.971                | 69.156               | N/A         | N/A            | 31.815        | PK   |
| 2  |      | 2483.500        | 57.394                 | 25.522               | -16.606     | 74.000         | 31.872        | PK   |
| 3  | *    | 2486.672        | 59.821                 | 27.950               | -14.179     | 74.000         | 31.871        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 17:12 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at 2452MHz |                          |

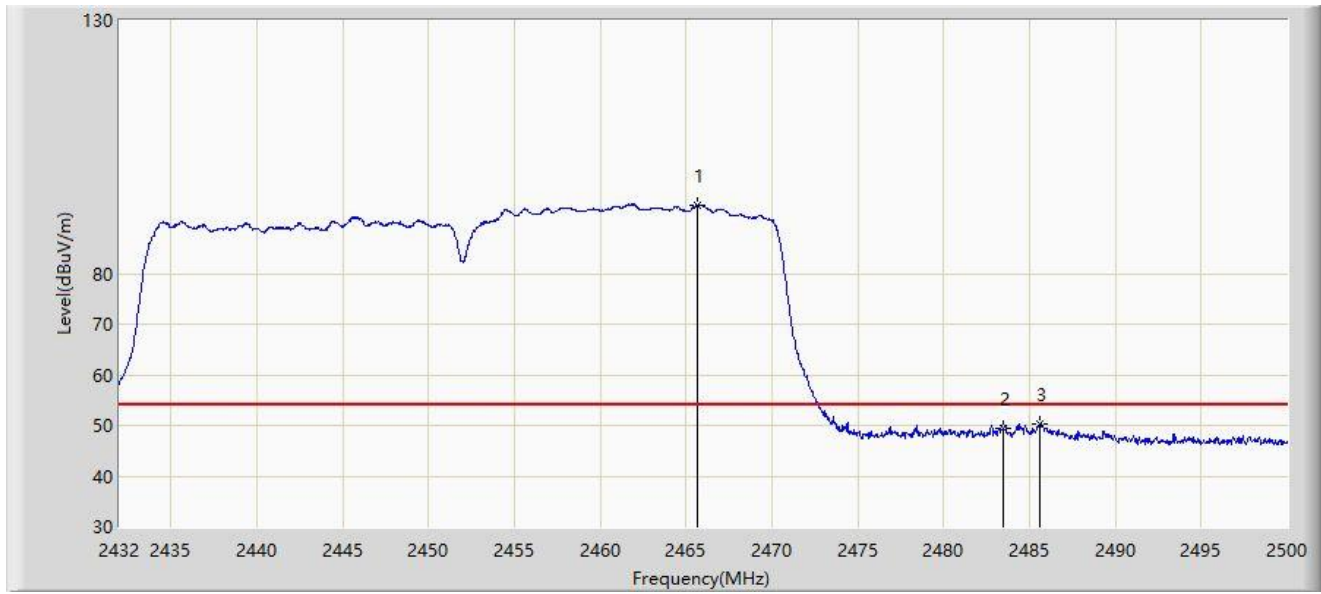


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2465.694        | 93.567                 | 61.720               | N/A         | N/A            | 31.847        | AV   |
| 2  |      | 2483.500        | 49.429                 | 17.557               | -4.571      | 54.000         | 31.872        | AV   |
| 3  | *    | 2485.584        | 50.367                 | 18.495               | -3.633      | 54.000         | 31.872        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 17:10 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at 2452MHz |                          |

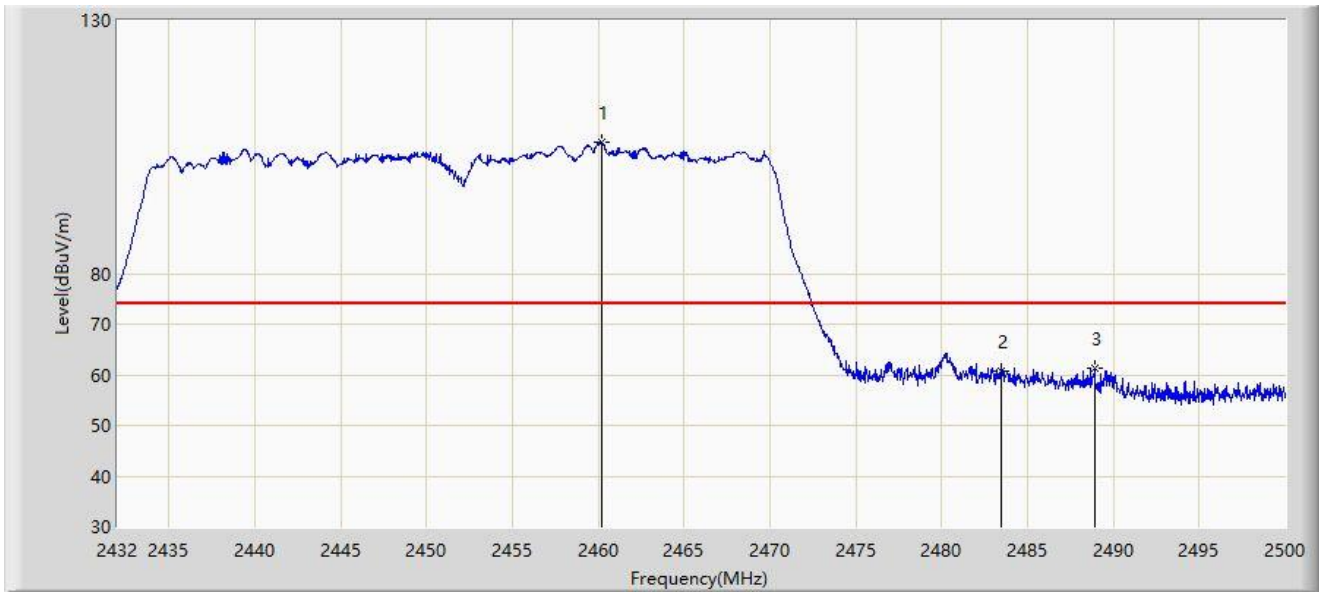


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2460.186        | 105.827                | 73.998               | N/A         | N/A            | 31.829        | PK   |
| 2  |      | 2483.500        | 60.773                 | 28.901               | -13.227     | 74.000         | 31.872        | PK   |
| 3  | *    | 2488.916        | 61.355                 | 29.484               | -12.645     | 74.000         | 31.871        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                |                          |
|------------------------------------------------|--------------------------|
| Site: SIP-AC1                                  | Time: 2022/05/18 - 17:04 |
| Limit: FCC_2.4G_RE(3m)                         | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                    | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at 2452MHz |                          |

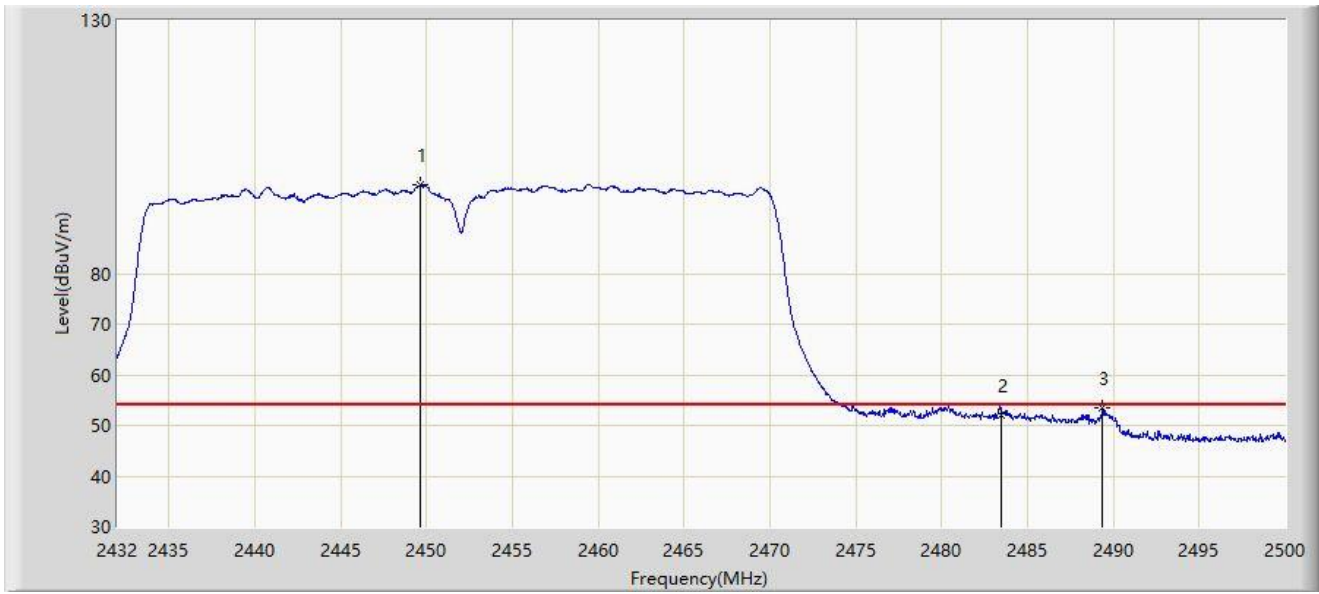


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2449.612        | 97.603                 | 65.831               | N/A         | N/A            | 31.772        | AV   |
| 2  |      | 2483.500        | 51.996                 | 20.124               | -2.004      | 54.000         | 31.872        | AV   |
| 3  | *    | 2489.358        | 53.372                 | 21.502               | -0.628      | 54.000         | 31.870        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: WZ-AC2                                    | Time: 2022/05/12 - 00:04 |
| Limit: FCC_Part15_Band Edge(3m)                 | Engineer: Bob Zhang      |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2412MHz |                          |

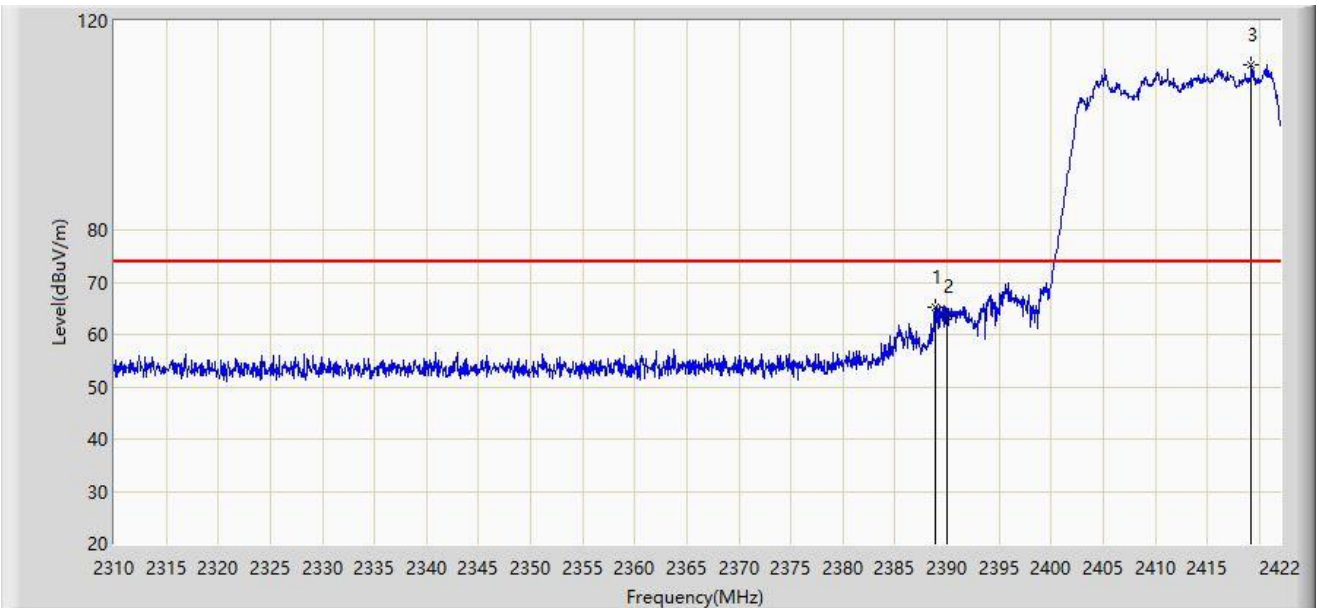


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2388.848        | 65.355                 | 33.916               | -8.645      | 74.000         | 31.439        | PK   |
| 2  |      | 2390.000        | 63.498                 | 32.065               | -10.502     | 74.000         | 31.433        | PK   |
| 3  |      | 2419.256        | 111.616                | 80.276               | N/A         | N/A            | 31.340        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: WZ-AC2                                    | Time: 2022/05/12 - 00:08 |
| Limit: FCC_Part15_Band Edge(3m)                 | Engineer: Bob Zhang      |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2412MHz |                          |

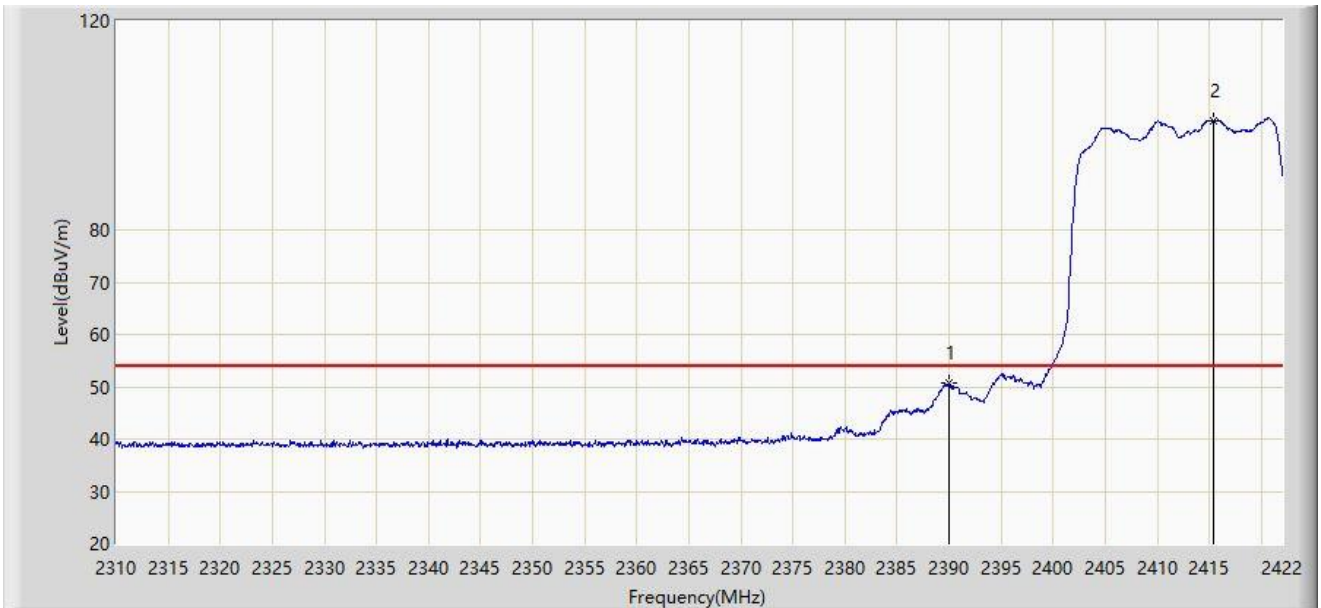


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2390.000        | 50.603                 | 19.170               | -3.397      | 54.000         | 31.433        | AV   |
| 2  |      | 2415.392        | 100.966                | 69.616               | N/A         | N/A            | 31.350        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: WZ-AC2                                    | Time: 2022/05/12 - 00:08 |
| Limit: FCC_Part15_Band Edge(3m)                 | Engineer: Bob Zhang      |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2412MHz |                          |

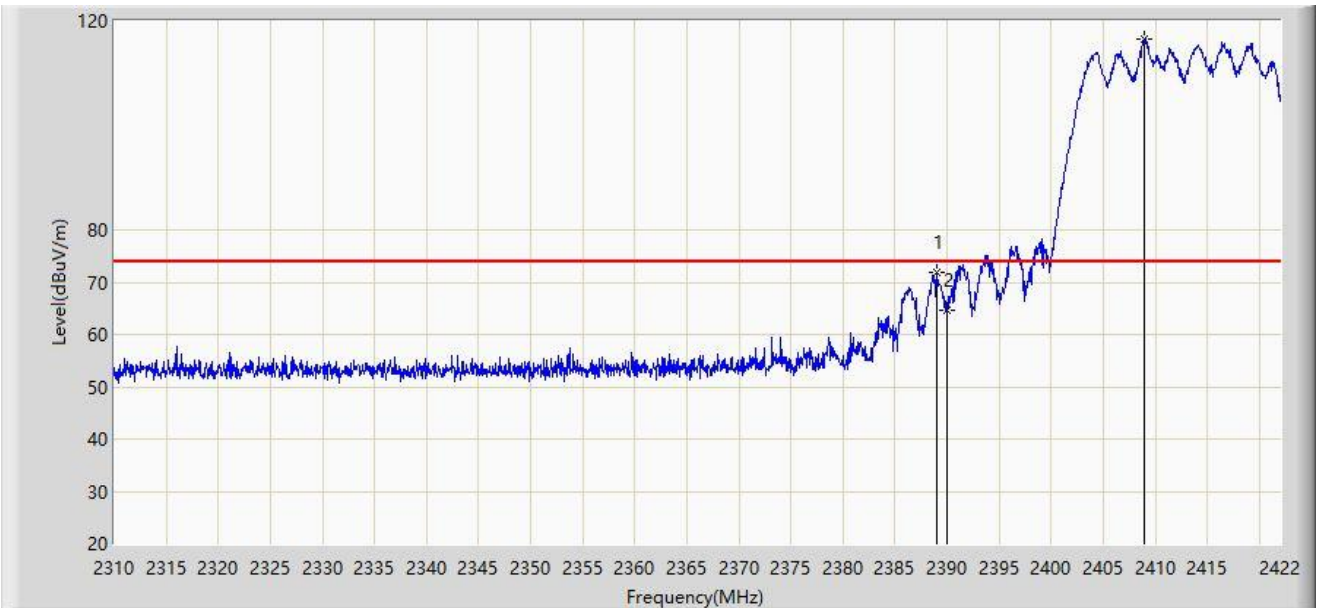


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2388.960        | 71.960                 | 40.522               | -2.040      | 74.000         | 31.438        | PK   |
| 2  |      | 2390.000        | 64.774                 | 33.341               | -9.226      | 74.000         | 31.433        | PK   |
| 3  |      | 2408.952        | 116.434                | 85.067               | N/A         | N/A            | 31.367        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: WZ-AC2                                    | Time: 2022/05/12 - 00:08 |
| Limit: FCC_Part15_Band Edge(3m)                 | Engineer: Bob Zhang      |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2412MHz |                          |

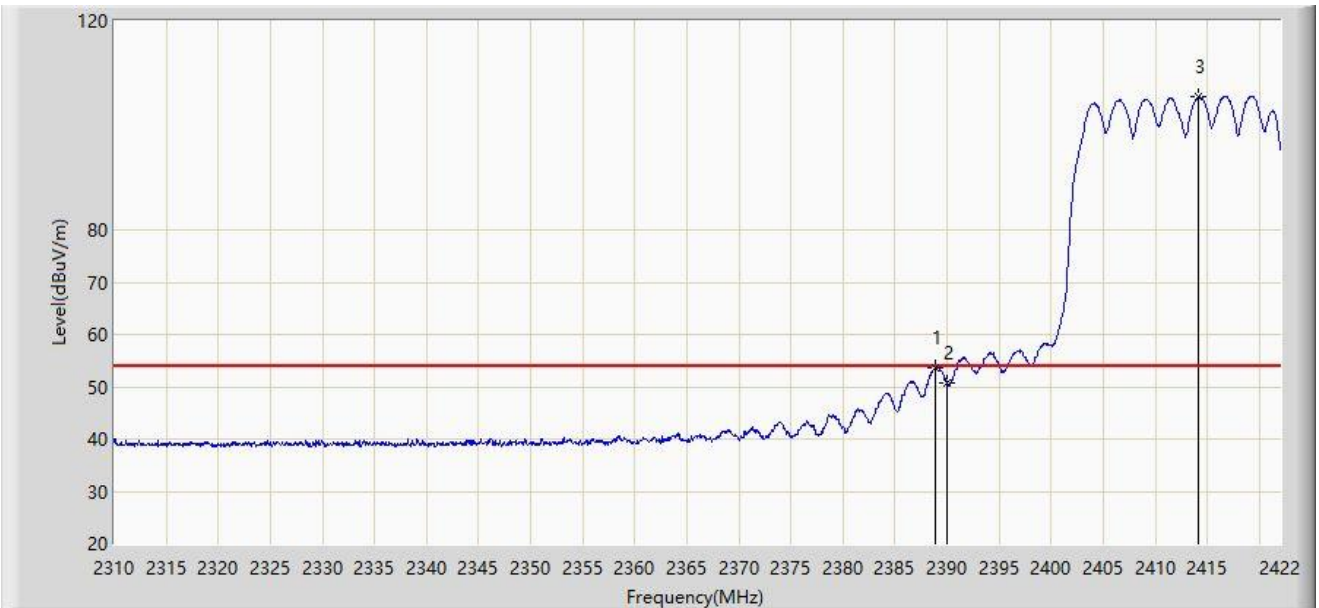


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2388.848        | 53.744                 | 22.305               | -0.256      | 54.000         | 31.439        | AV   |
| 2  |      | 2390.000        | 50.661                 | 19.228               | -3.339      | 54.000         | 31.433        | AV   |
| 3  |      | 2414.104        | 105.364                | 74.010               | N/A         | N/A            | 31.354        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/22 - 14:49 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2417MHz |                          |

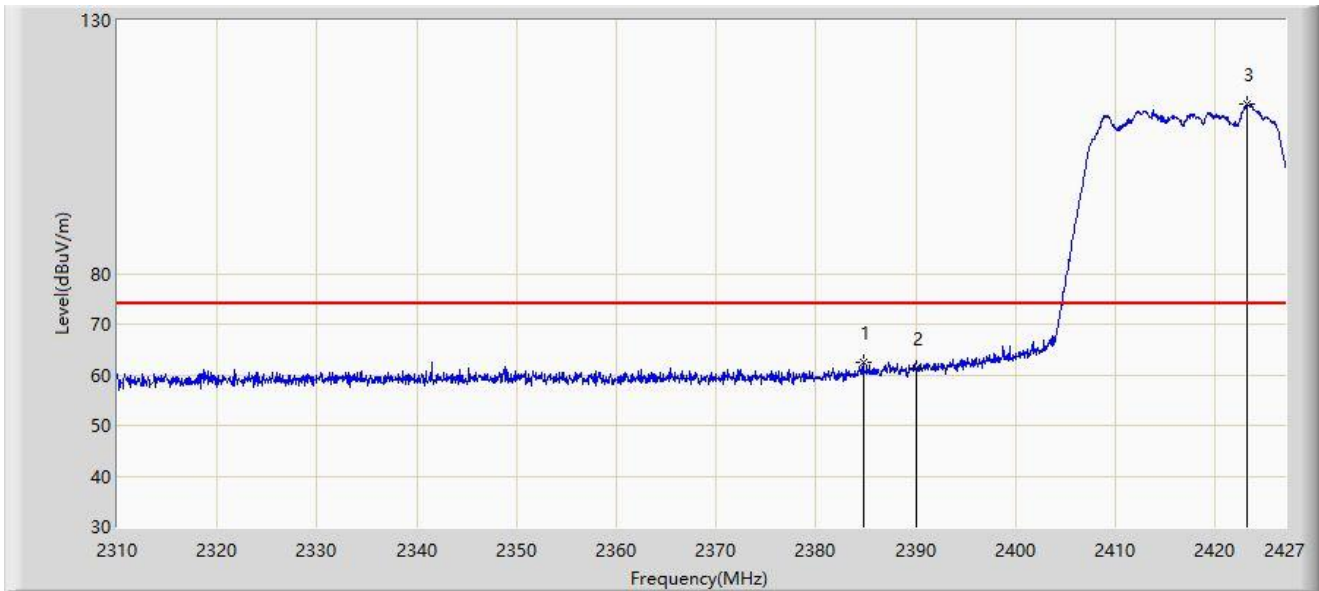


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2384.705        | 62.448                 | 30.957               | -11.552     | 74.000         | 31.491        | PK   |
| 2  |      | 2390.000        | 61.296                 | 29.707               | -12.704     | 74.000         | 31.588        | PK   |
| 3  |      | 2423.256        | 113.421                | 81.720               | N/A         | N/A            | 31.701        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/22 - 14:46 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2417MHz |                          |

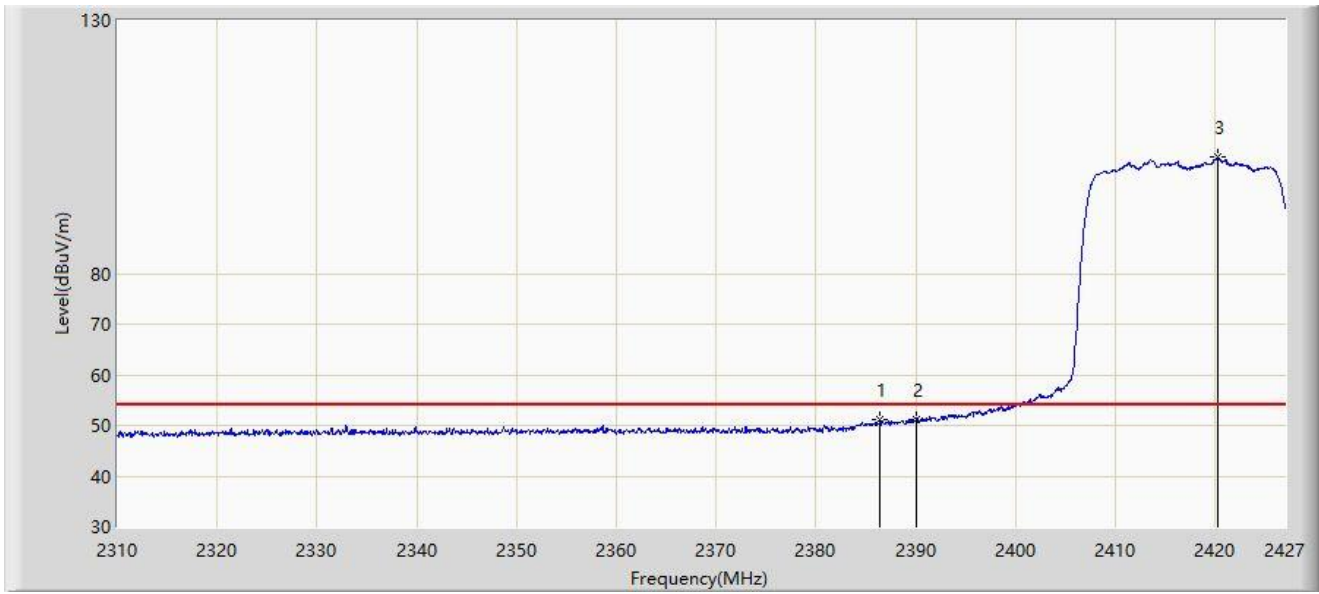


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2386.401        | 51.231                 | 19.709               | -2.769      | 54.000         | 31.522        | AV   |
| 2  |      | 2390.000        | 51.107                 | 19.518               | -2.893      | 54.000         | 31.588        | AV   |
| 3  |      | 2420.214        | 102.929                | 71.233               | N/A         | N/A            | 31.696        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/22 - 14:45 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2417MHz |                          |

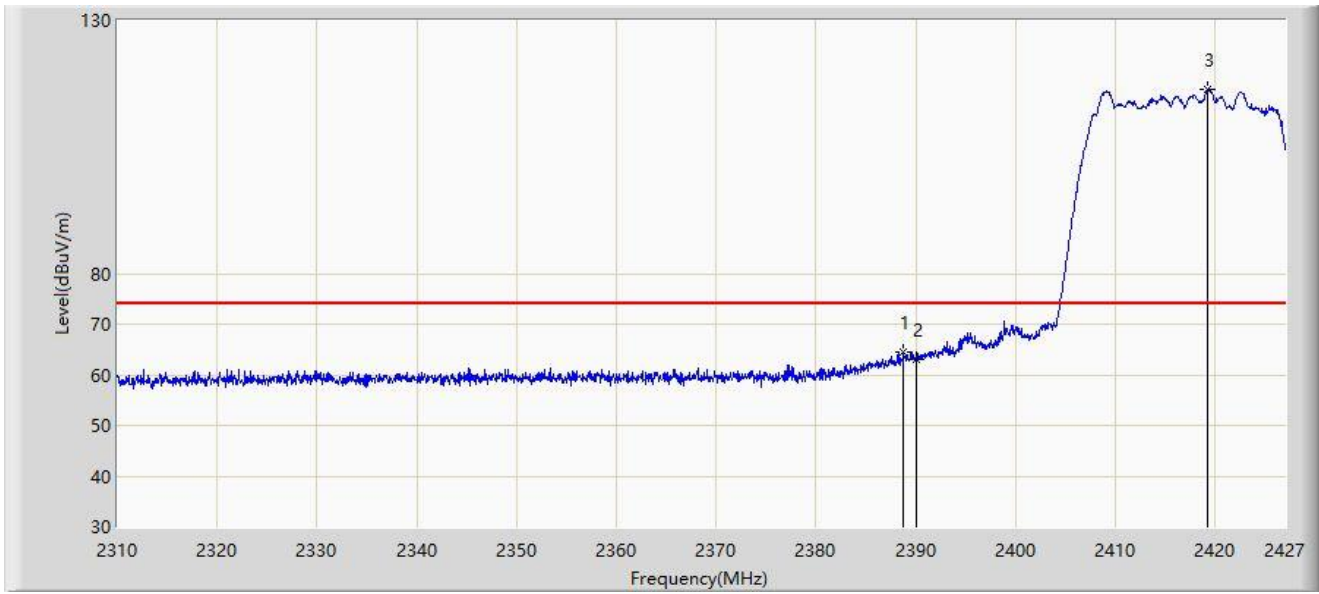


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2388.800        | 64.503                 | 32.937               | -9.497      | 74.000         | 31.566        | PK   |
| 2  |      | 2390.000        | 63.065                 | 31.476               | -10.935     | 74.000         | 31.588        | PK   |
| 3  |      | 2419.278        | 116.342                | 84.647               | N/A         | N/A            | 31.695        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/22 - 14:41 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2417MHz |                          |

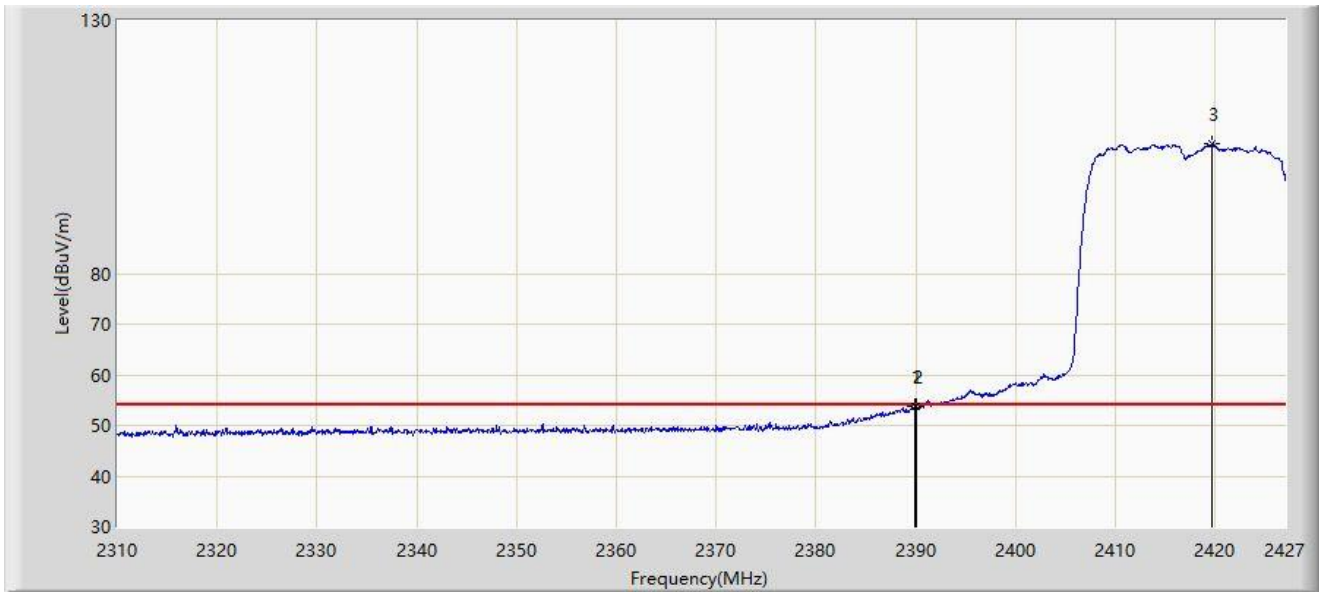


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2389.969        | 53.714                 | 22.126               | -0.286      | 54.000         | 31.588        | AV   |
| 2  |      | 2390.000        | 53.638                 | 22.049               | -0.362      | 54.000         | 31.588        | AV   |
| 3  |      | 2419.687        | 105.752                | 74.056               | N/A         | N/A            | 31.696        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/22 - 15:04 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2422MHz |                          |

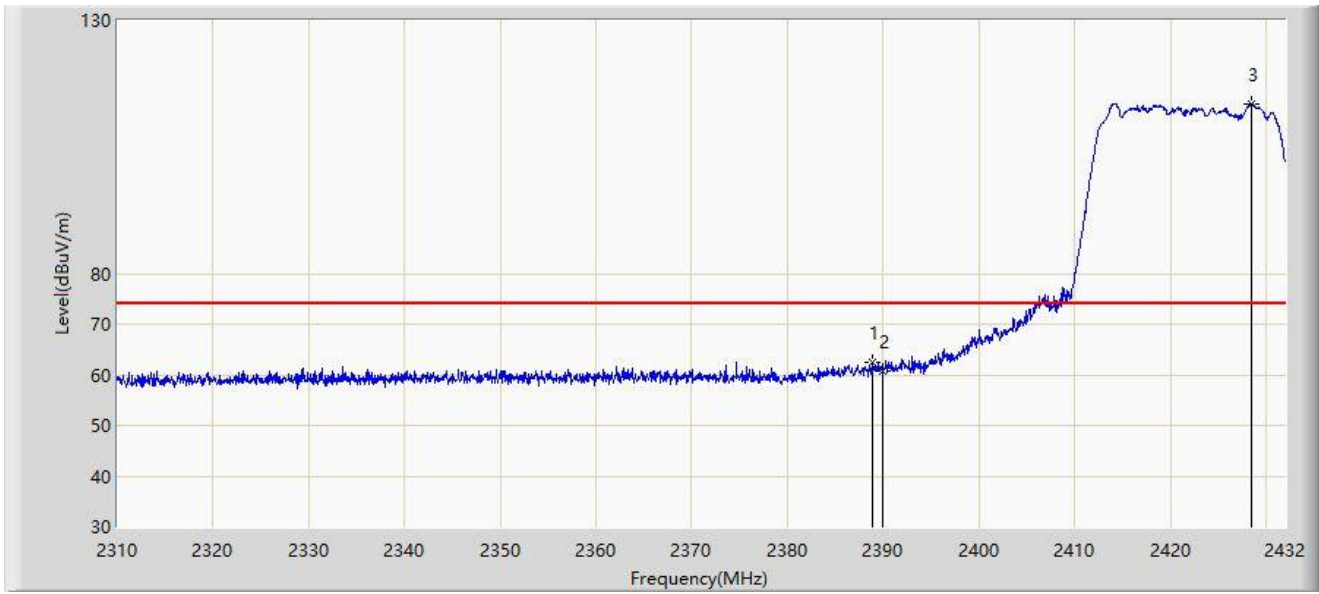


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2388.934        | 62.458                 | 30.889               | -11.542     | 74.000         | 31.569        | PK   |
| 2  |      | 2390.000        | 60.786                 | 29.197               | -13.214     | 74.000         | 31.588        | PK   |
| 3  |      | 2428.523        | 113.536                | 81.827               | N/A         | N/A            | 31.708        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/22 - 15:01 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2422MHz |                          |

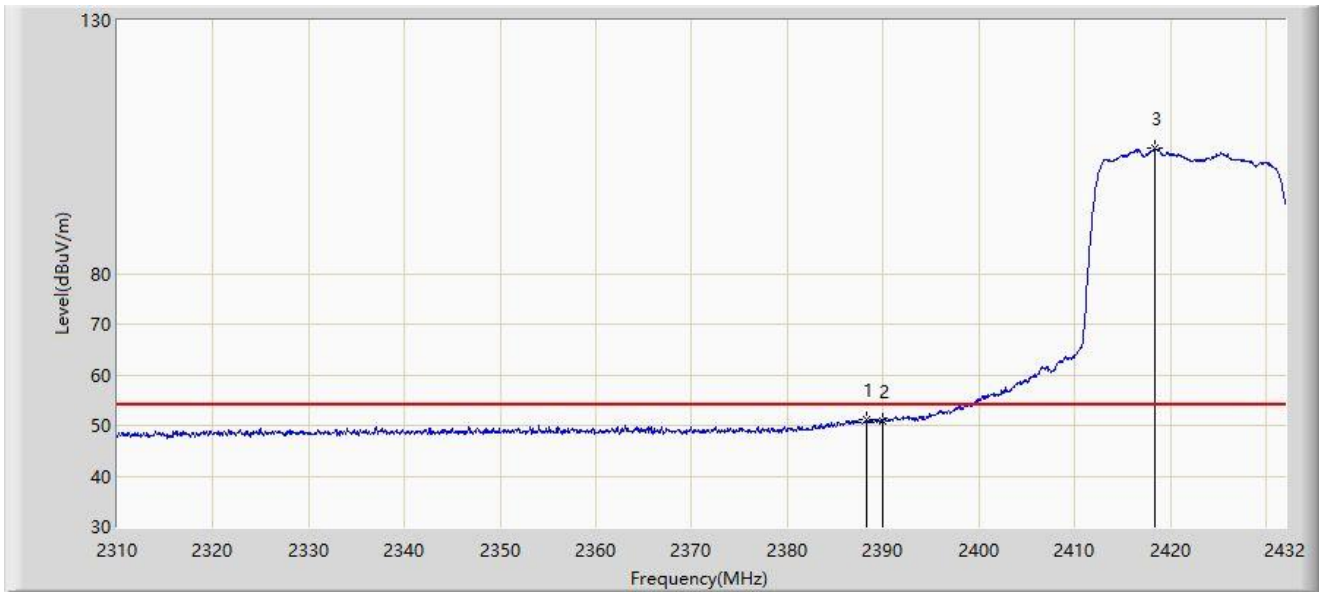


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2388.263        | 51.118                 | 19.562               | -2.882      | 54.000         | 31.556        | AV   |
| 2  |      | 2390.000        | 50.971                 | 19.382               | -3.029      | 54.000         | 31.588        | AV   |
| 3  |      | 2418.397        | 104.727                | 73.033               | N/A         | N/A            | 31.694        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/22 - 14:59 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2422MHz |                          |

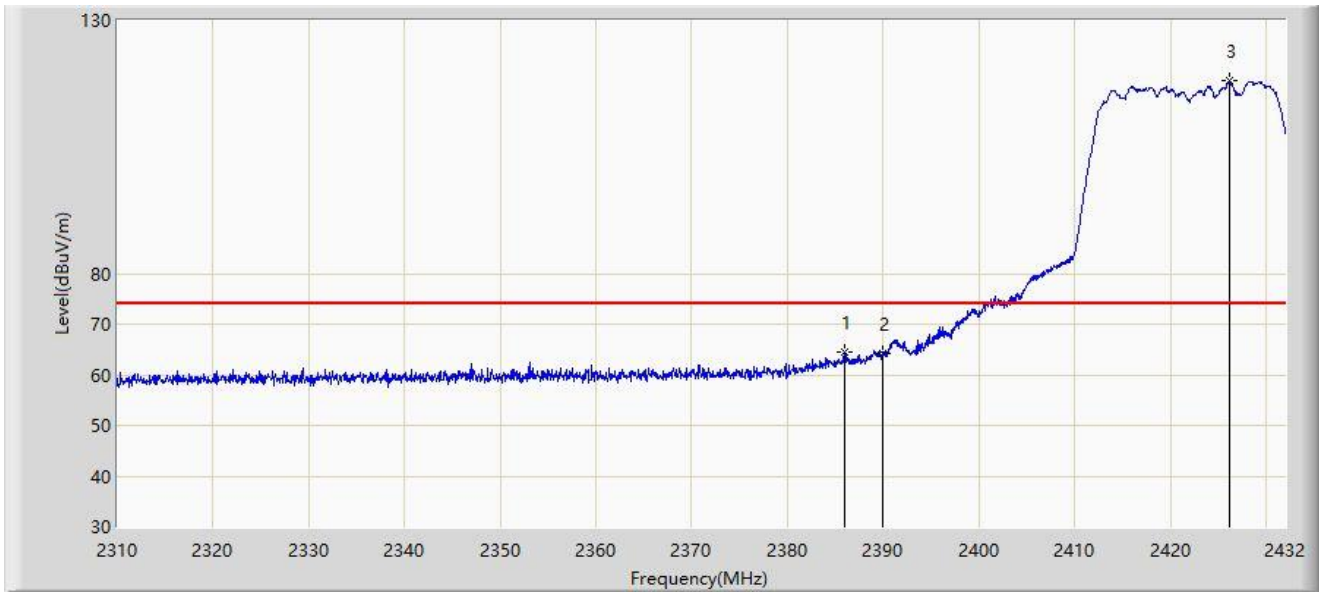


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2385.945        | 64.523                 | 33.009               | -9.477      | 74.000         | 31.514        | PK   |
| 2  |      | 2390.000        | 64.263                 | 32.674               | -9.737      | 74.000         | 31.588        | PK   |
| 3  |      | 2426.205        | 118.082                | 86.377               | N/A         | N/A            | 31.704        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/22 - 14:57 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2422MHz |                          |

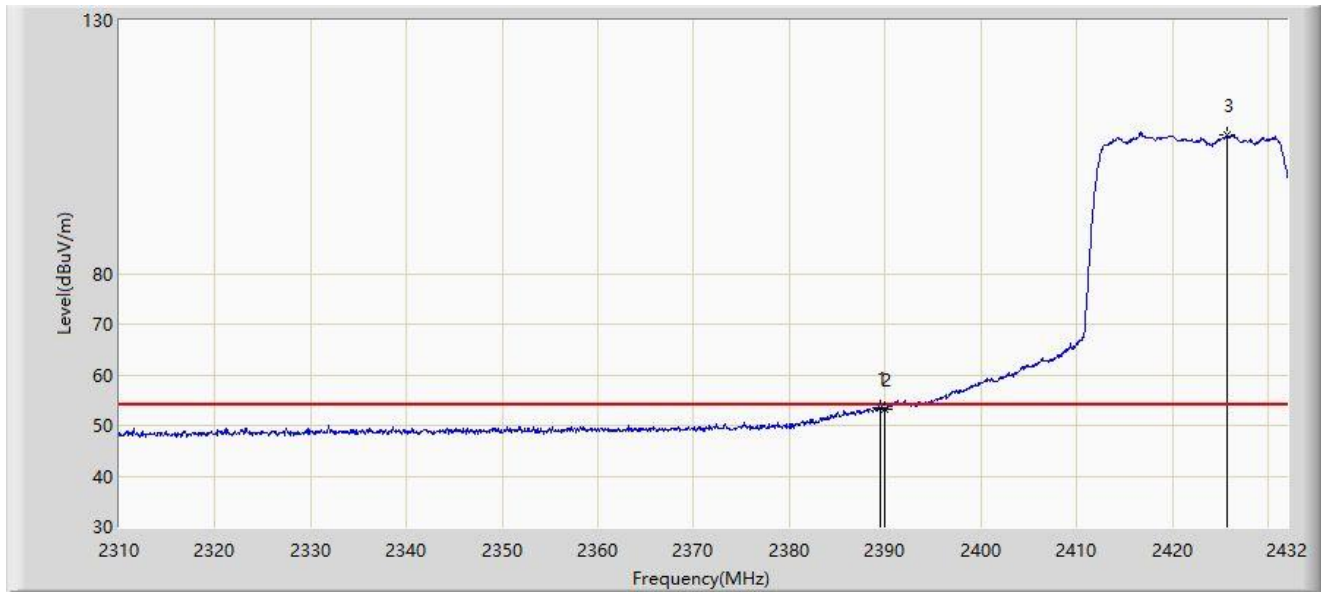


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2389.544        | 53.545                 | 21.965               | -0.455      | 54.000         | 31.581        | AV   |
| 2  |      | 2390.000        | 53.152                 | 21.563               | -0.848      | 54.000         | 31.588        | AV   |
| 3  |      | 2425.717        | 107.427                | 75.723               | N/A         | N/A            | 31.704        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/22 - 14:17 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2437MHz |                          |

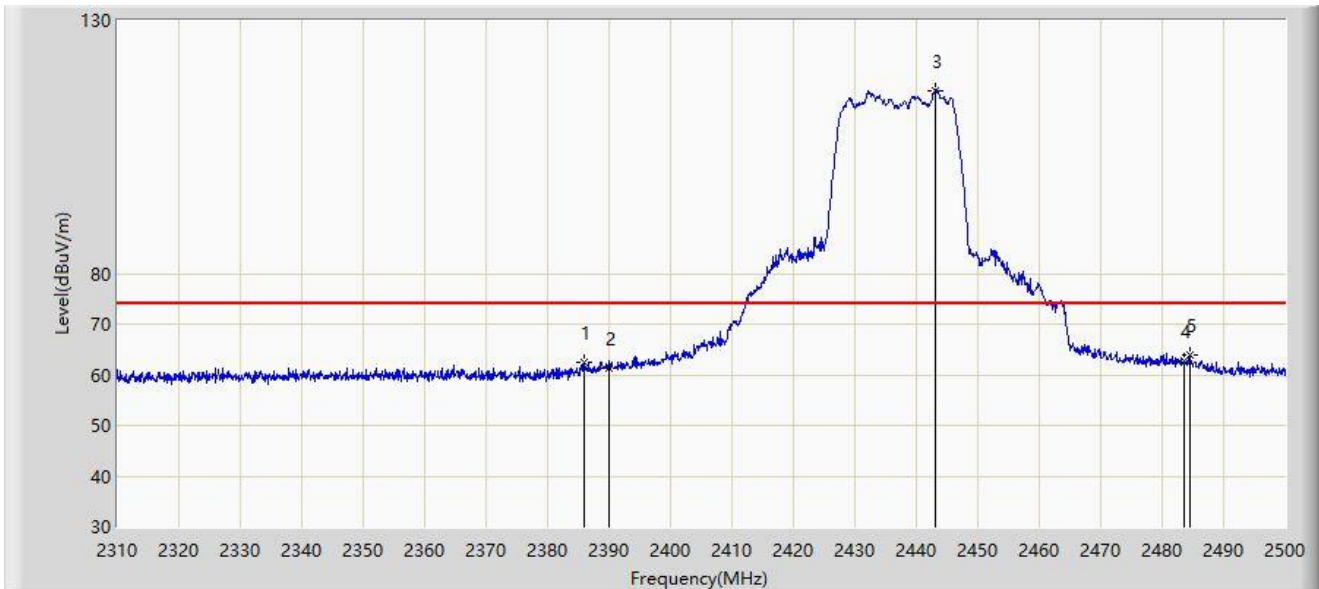


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2385.905        | 62.507                 | 30.994               | -11.493     | 74.000         | 31.513        | PK   |
| 2  |      | 2390.000        | 61.301                 | 29.712               | -12.699     | 74.000         | 31.588        | PK   |
| 3  |      | 2443.095        | 116.225                | 84.482               | N/A         | N/A            | 31.743        | PK   |
| 4  |      | 2483.500        | 62.731                 | 30.859               | -11.269     | 74.000         | 31.872        | PK   |
| 5  | *    | 2484.420        | 63.794                 | 31.922               | -10.206     | 74.000         | 31.872        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/22 - 14:12 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2437MHz |                          |

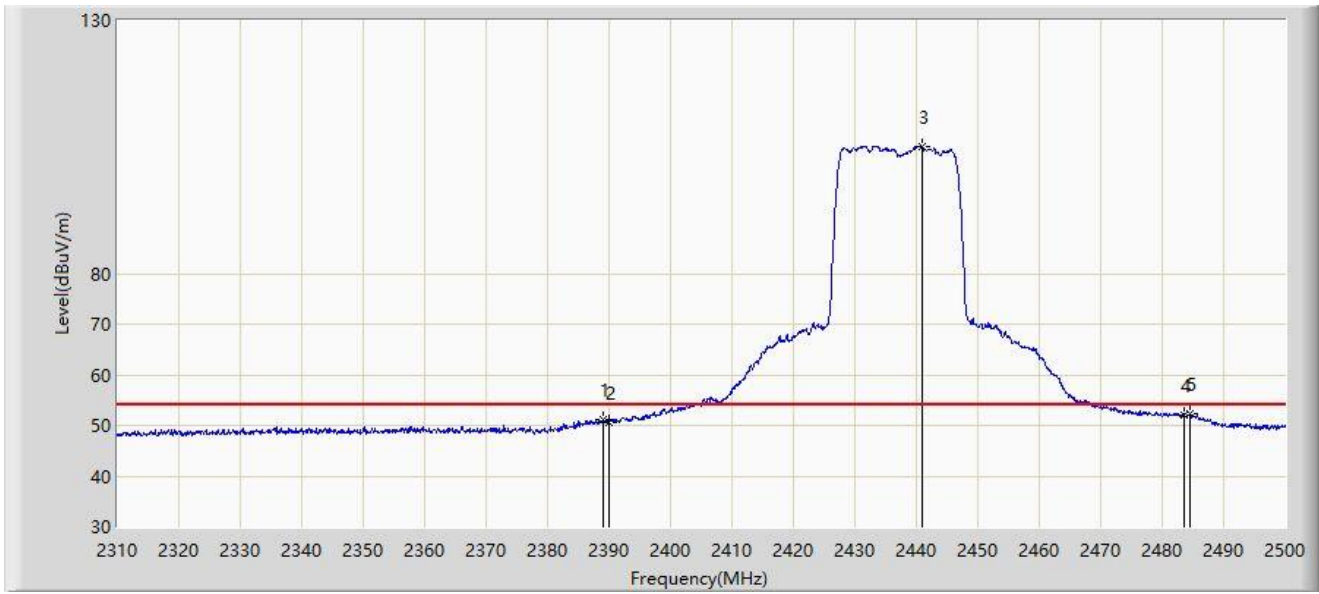


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2389.040        | 51.127                 | 19.556               | -2.873      | 54.000         | 31.571        | AV   |
| 2  |      | 2390.000        | 50.715                 | 19.126               | -3.285      | 54.000         | 31.588        | AV   |
| 3  |      | 2440.910        | 105.047                | 73.309               | N/A         | N/A            | 31.738        | AV   |
| 4  |      | 2483.500        | 52.060                 | 20.188               | -1.940      | 54.000         | 31.872        | AV   |
| 5  | *    | 2484.420        | 52.194                 | 20.322               | -1.806      | 54.000         | 31.872        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/22 - 14:09 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2437MHz |                          |

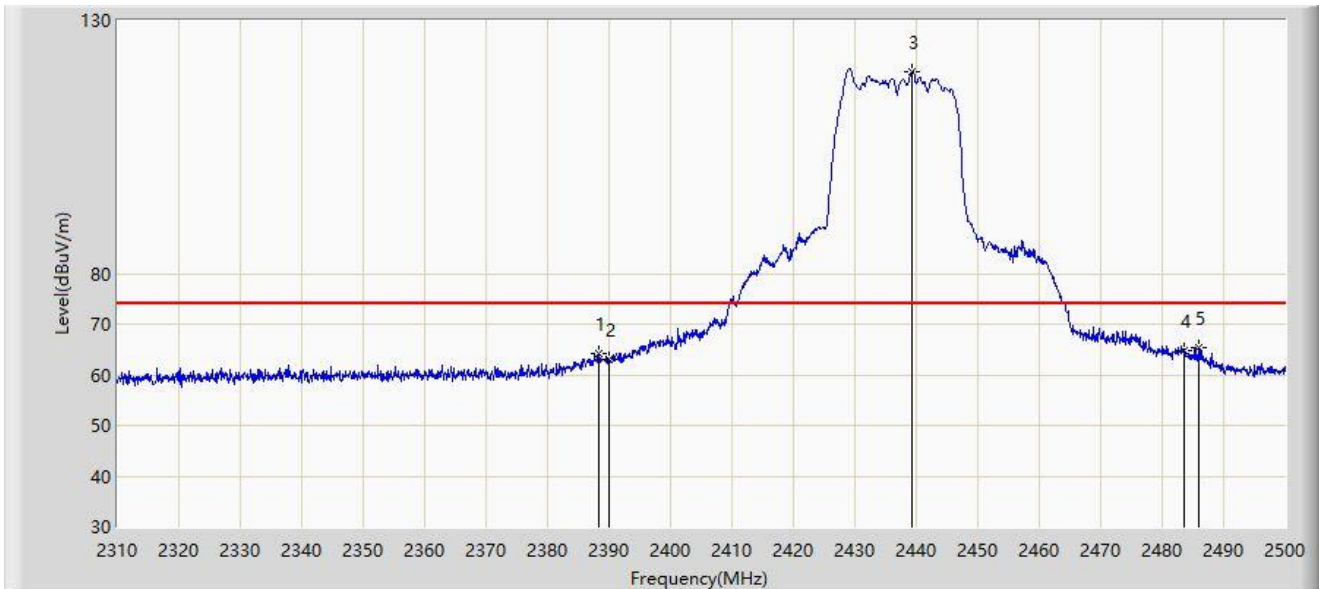


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2388.280        | 64.220                 | 32.663               | -9.780      | 74.000         | 31.556        | PK   |
| 2  |      | 2390.000        | 63.002                 | 31.413               | -10.998     | 74.000         | 31.588        | PK   |
| 3  |      | 2439.295        | 119.975                | 88.241               | N/A         | N/A            | 31.734        | PK   |
| 4  |      | 2483.500        | 64.638                 | 32.766               | -9.362      | 74.000         | 31.872        | PK   |
| 5  | *    | 2485.940        | 65.282                 | 33.411               | -8.718      | 74.000         | 31.872        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/22 - 14:07 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2437MHz |                          |

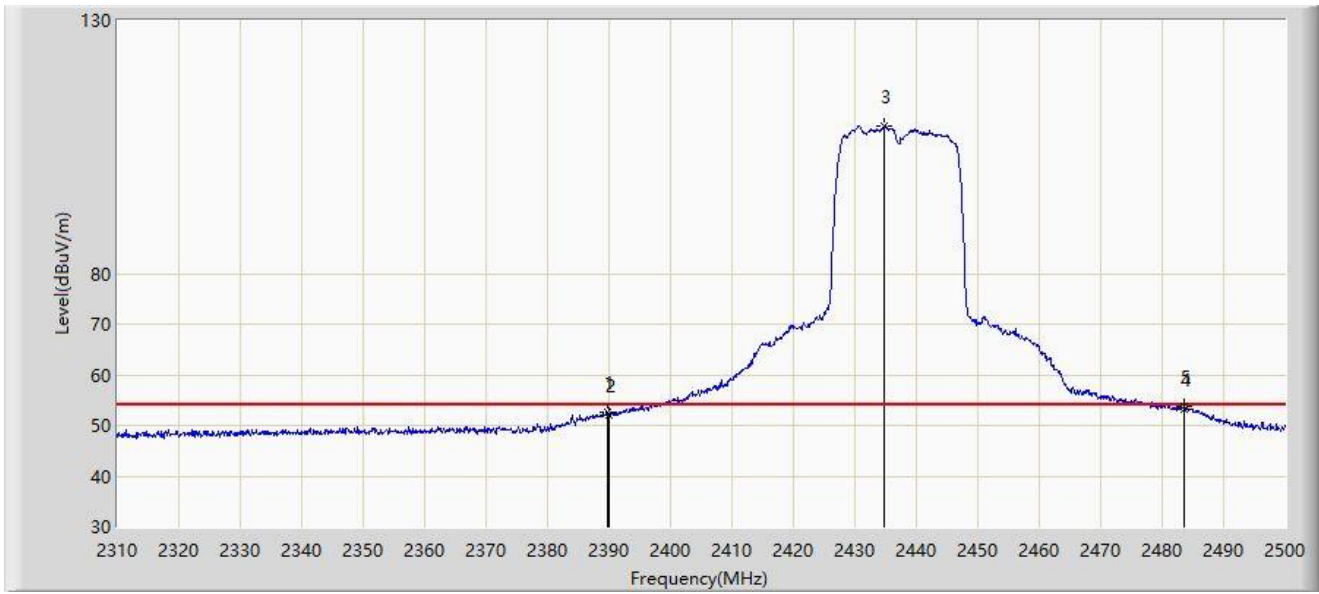


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2389.705        | 52.527                 | 20.944               | -1.473      | 54.000         | 31.583        | AV   |
| 2  |      | 2390.000        | 51.995                 | 20.406               | -2.005      | 54.000         | 31.588        | AV   |
| 3  |      | 2434.830        | 109.158                | 77.435               | N/A         | N/A            | 31.724        | AV   |
| 4  |      | 2483.500        | 53.173                 | 21.301               | -0.827      | 54.000         | 31.872        | AV   |
| 5  | *    | 2483.660        | 53.668                 | 21.796               | -0.332      | 54.000         | 31.873        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/22 - 15:33 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2452MHz |                          |

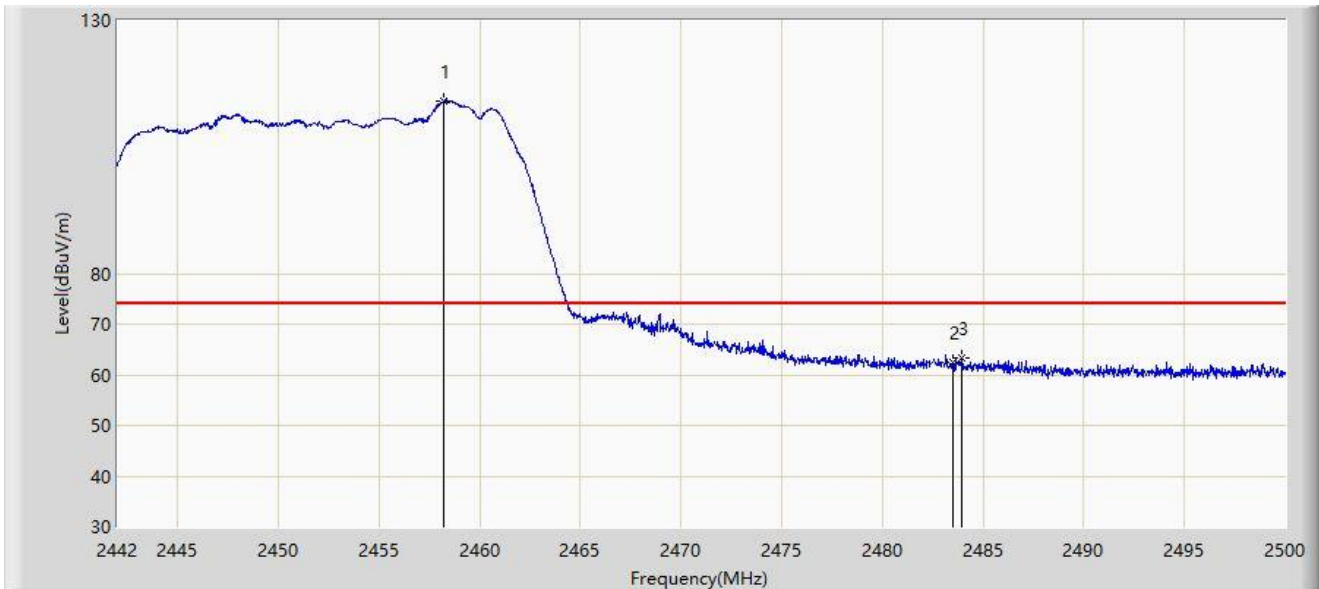


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2458.211        | 114.084                | 82.265               | N/A         | N/A            | 31.819        | PK   |
| 2  |      | 2483.500        | 62.524                 | 30.652               | -11.476     | 74.000         | 31.872        | PK   |
| 3  | *    | 2483.963        | 63.191                 | 31.319               | -10.809     | 74.000         | 31.872        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/22 - 15:31 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2452MHz |                          |

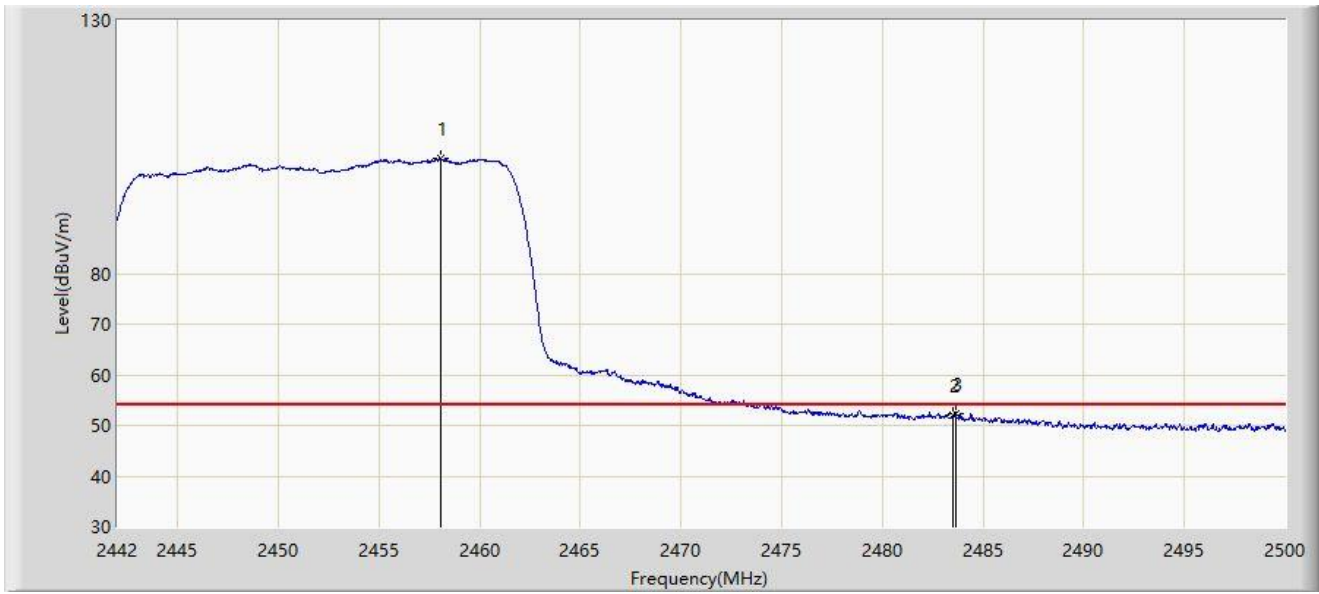


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2458.037        | 102.742                | 70.924               | N/A         | N/A            | 31.818        | AV   |
| 2  |      | 2483.500        | 51.994                 | 20.122               | -2.006      | 54.000         | 31.872        | AV   |
| 3  | *    | 2483.644        | 52.244                 | 20.372               | -1.756      | 54.000         | 31.873        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/22 - 15:30 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2452MHz |                          |

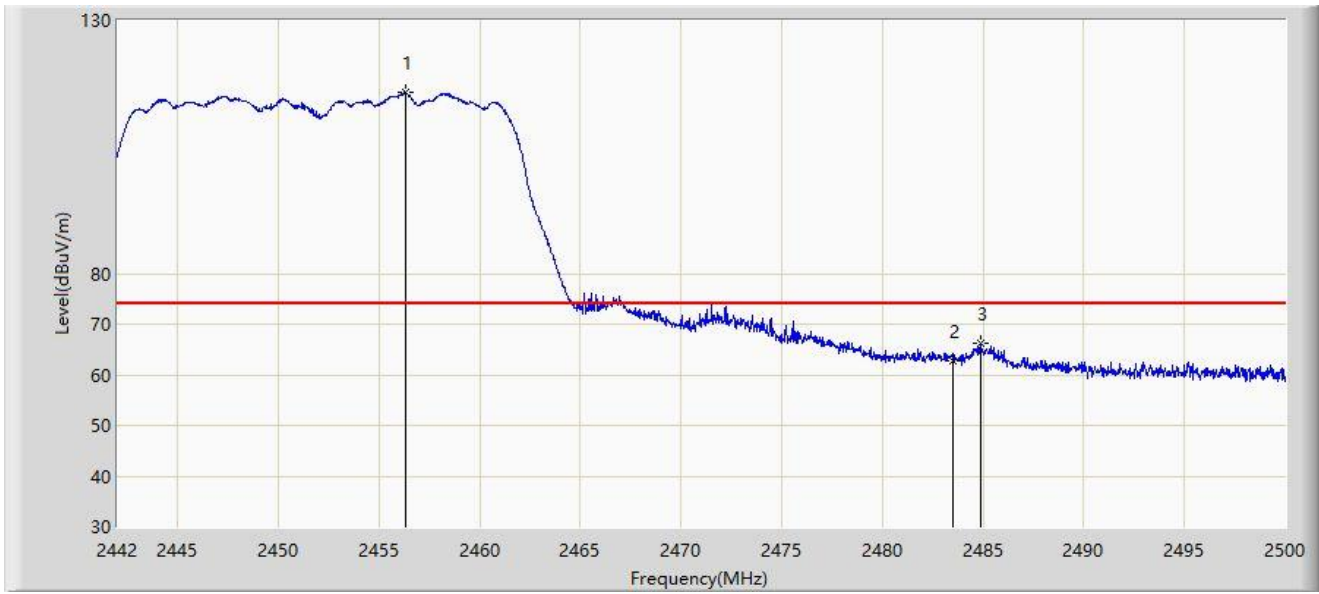


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2456.326        | 115.915                | 84.106               | N/A         | N/A            | 31.808        | PK   |
| 2  |      | 2483.500        | 62.865                 | 30.993               | -11.135     | 74.000         | 31.872        | PK   |
| 3  | *    | 2484.891        | 66.328                 | 34.456               | -7.672      | 74.000         | 31.872        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/22 - 15:25 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2452MHz |                          |

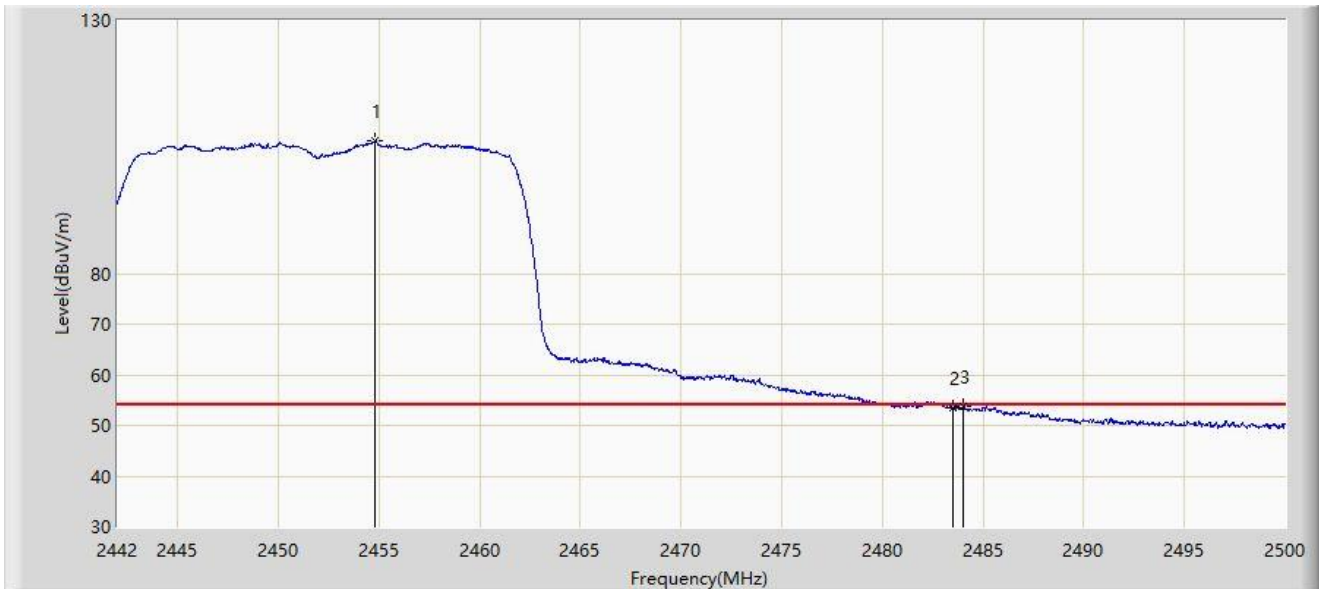


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2454.760        | 106.208                | 74.408               | N/A         | N/A            | 31.800        | AV   |
| 2  |      | 2483.500        | 53.502                 | 21.630               | -0.498      | 54.000         | 31.872        | AV   |
| 3  | *    | 2484.021        | 53.796                 | 21.924               | -0.204      | 54.000         | 31.872        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/22 - 15:23 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2457MHz |                          |

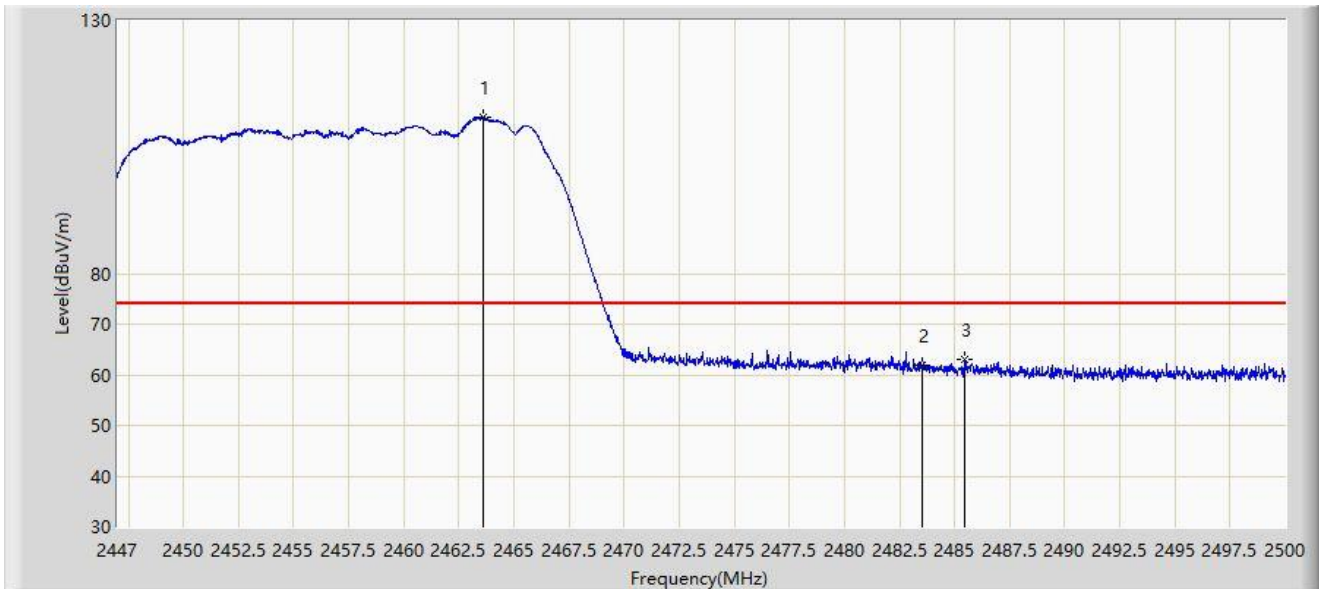


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2463.615        | 110.929                | 79.087               | N/A         | N/A            | 31.842        | PK   |
| 2  |      | 2483.500        | 61.824                 | 29.952               | -12.176     | 74.000         | 31.872        | PK   |
| 3  | *    | 2485.451        | 63.169                 | 31.297               | -10.831     | 74.000         | 31.871        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/22 - 15:20 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2457MHz |                          |

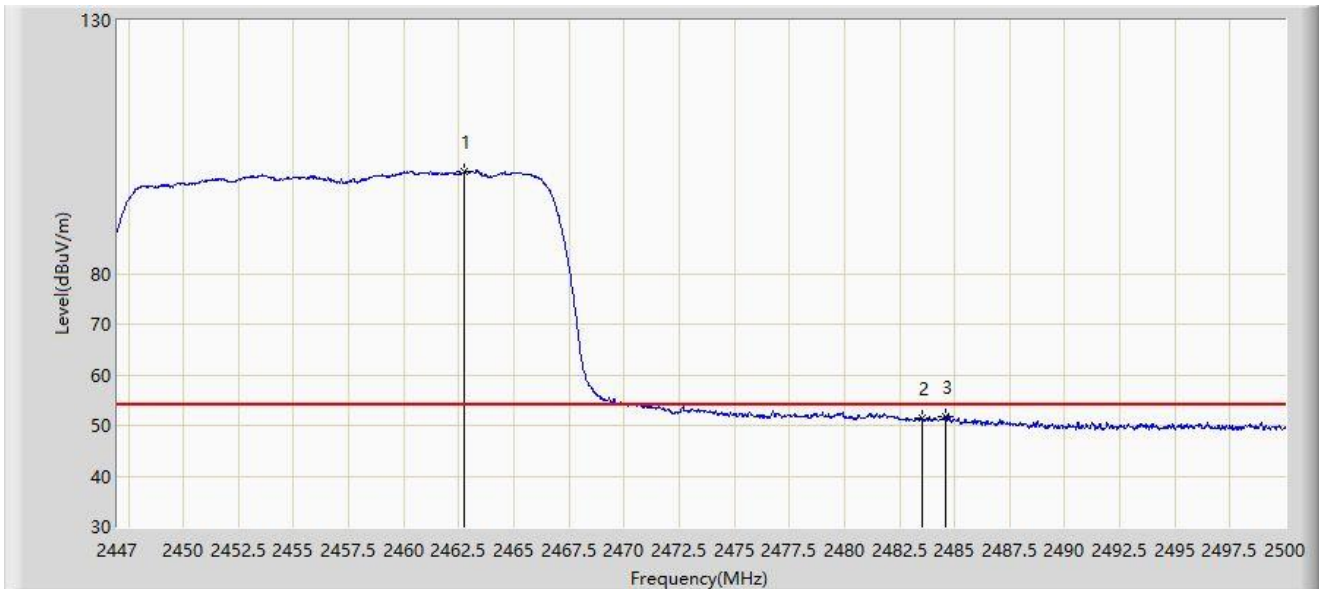


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2462.715        | 100.110                | 68.269               | N/A         | N/A            | 31.841        | AV   |
| 2  |      | 2483.500        | 51.485                 | 19.613               | -2.515      | 54.000         | 31.872        | AV   |
| 3  | *    | 2484.577        | 51.844                 | 19.972               | -2.156      | 54.000         | 31.872        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/22 - 15:18 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2457MHz |                          |

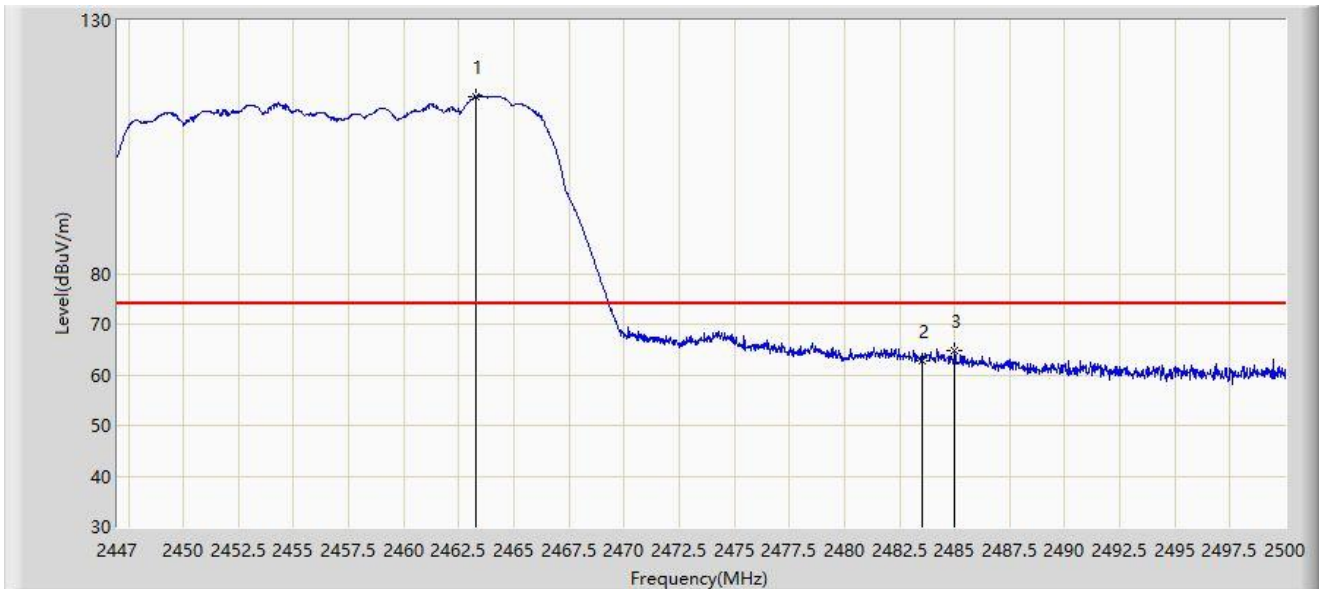


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2463.271        | 114.948                | 83.106               | N/A         | N/A            | 31.842        | PK   |
| 2  |      | 2483.500        | 62.814                 | 30.942               | -11.186     | 74.000         | 31.872        | PK   |
| 3  | *    | 2485.001        | 64.839                 | 32.967               | -9.161      | 74.000         | 31.871        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/22 - 15:17 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2457MHz |                          |

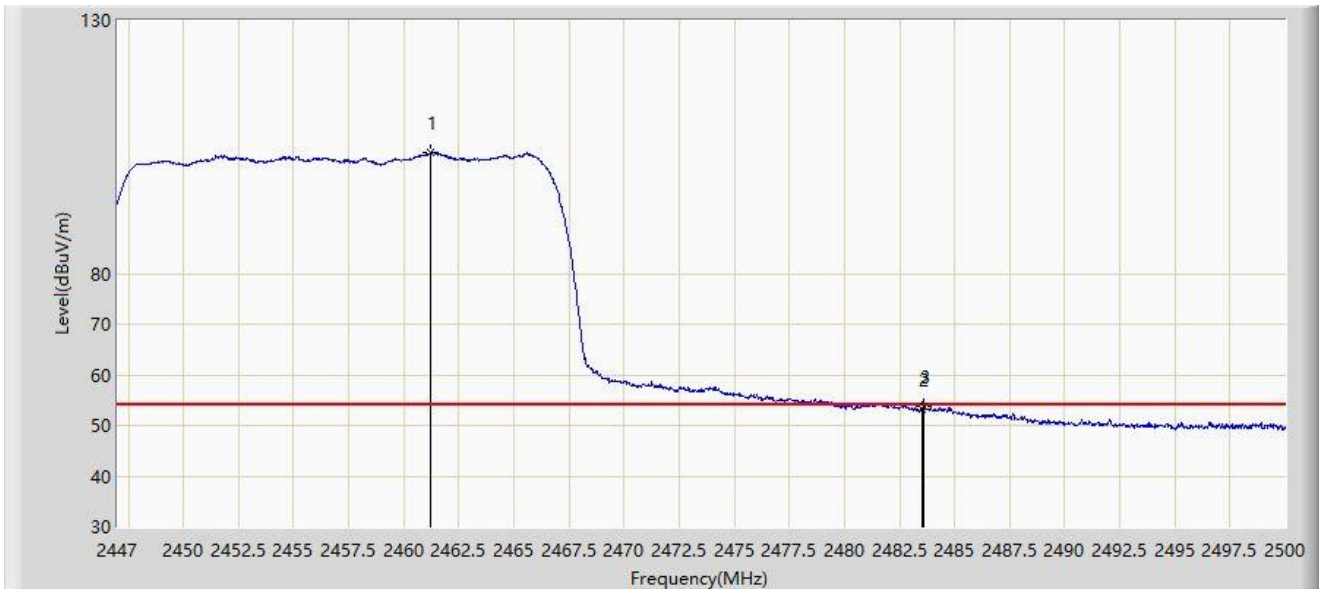


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2461.230        | 103.778                | 71.943               | N/A         | N/A            | 31.835        | AV   |
| 2  |      | 2483.500        | 53.332                 | 21.460               | -0.668      | 54.000         | 31.872        | AV   |
| 3  | *    | 2483.570        | 53.696                 | 21.824               | -0.304      | 54.000         | 31.872        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: WZ-AC2                                    | Time: 2022/05/12 - 00:28 |
| Limit: FCC_Part15_Band Edge(3m)                 | Engineer: Bob Zhang      |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2462MHz |                          |

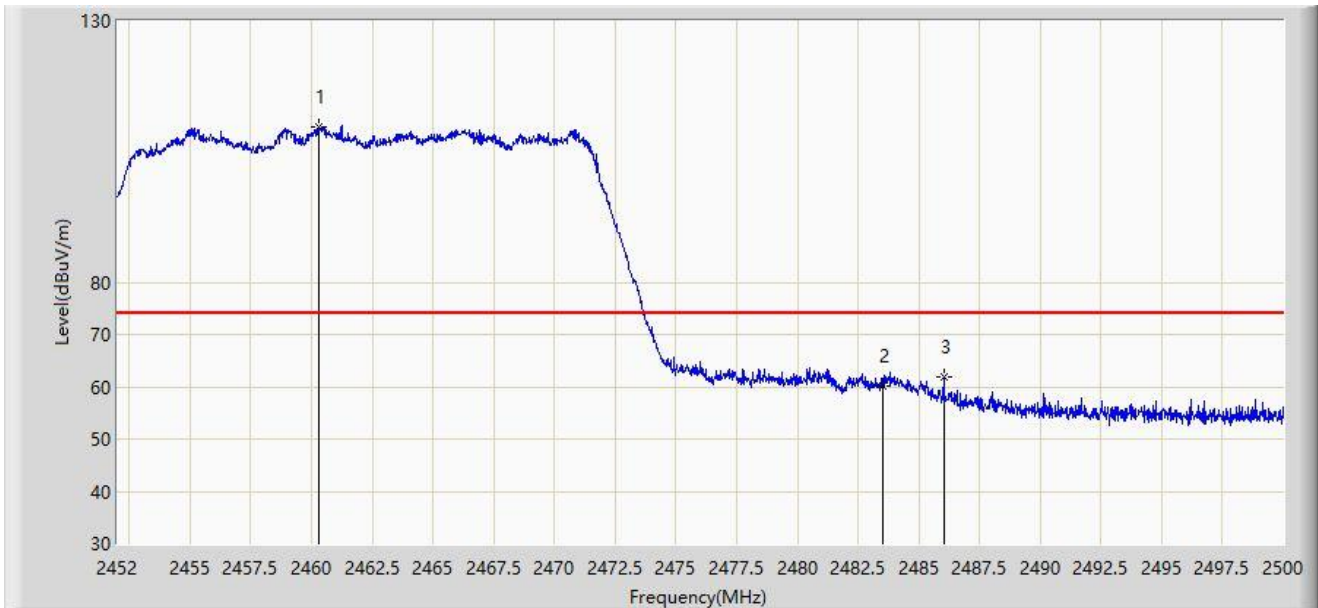


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2460.280        | 109.682                | 78.348               | N/A         | N/A            | 31.334        | PK   |
| 2  |      | 2483.500        | 60.105                 | 28.790               | -13.895     | 74.000         | 31.315        | PK   |
| 3  | *    | 2486.032        | 61.996                 | 30.677               | -12.004     | 74.000         | 31.319        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: WZ-AC2                                    | Time: 2022/05/12 - 00:31 |
| Limit: FCC_Part15_Band Edge(3m)                 | Engineer: Bob Zhang      |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2462MHz |                          |

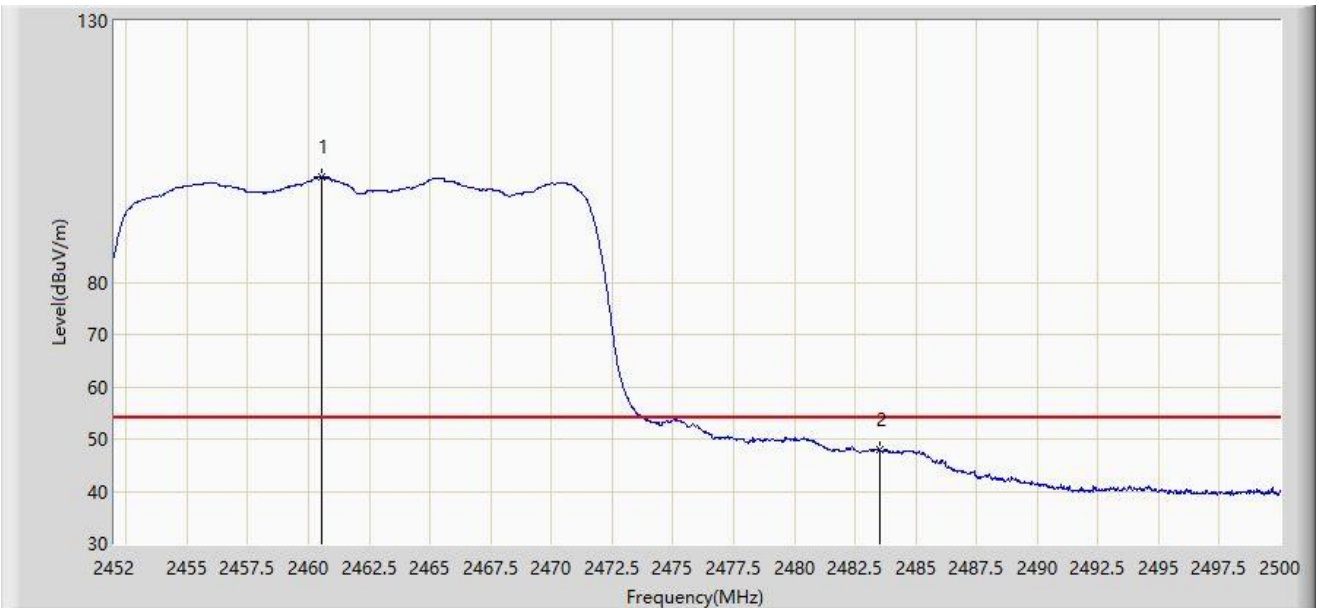


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2460.568        | 100.079                | 68.746               | N/A         | N/A            | 31.333        | AV   |
| 2  | *    | 2483.500        | 47.949                 | 16.634               | -6.051      | 54.000         | 31.315        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: WZ-AC2                                    | Time: 2022/05/12 - 00:31 |
| Limit: FCC_Part15_Band Edge(3m)                 | Engineer: Bob Zhang      |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2462MHz |                          |

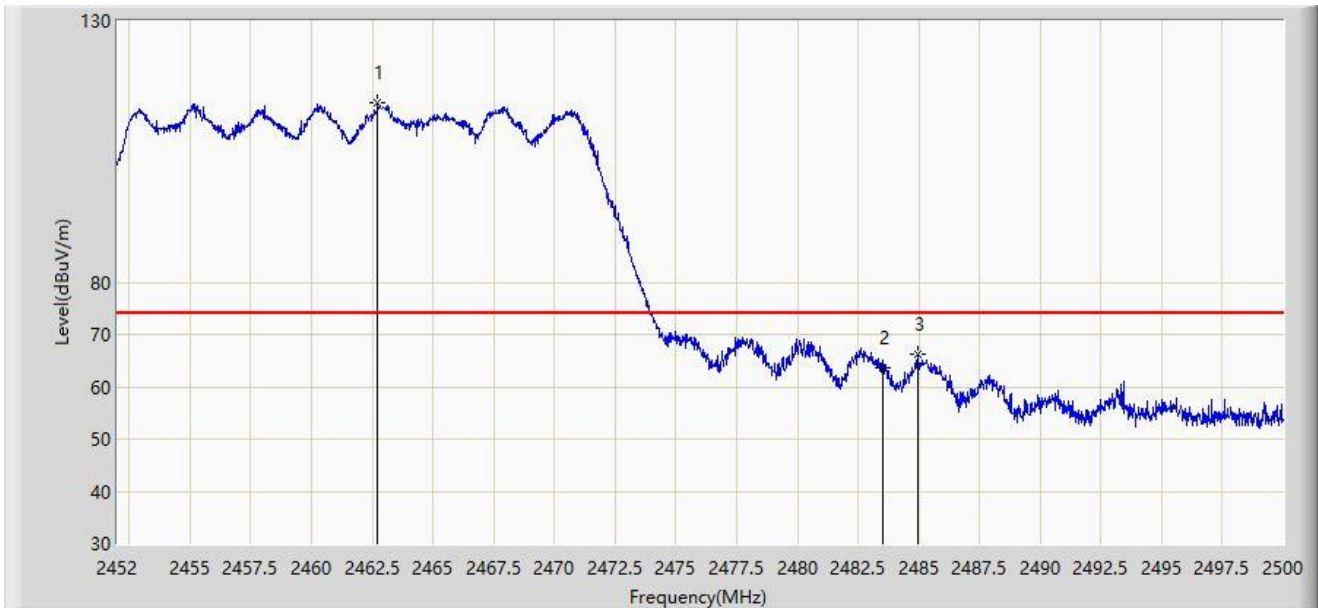


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2462.728        | 114.341                | 83.013               | N/A         | N/A            | 31.327        | PK   |
| 2  |      | 2483.500        | 63.695                 | 32.380               | -10.305     | 74.000         | 31.315        | PK   |
| 3  | *    | 2484.952        | 66.203                 | 34.886               | -7.797      | 74.000         | 31.317        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: WZ-AC2                                    | Time: 2022/05/12 - 00:31 |
| Limit: FCC_Part15_Band Edge(3m)                 | Engineer: Bob Zhang      |
| Probe: BBHA9120D_1457_1-18GHz                   | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at 2462MHz |                          |

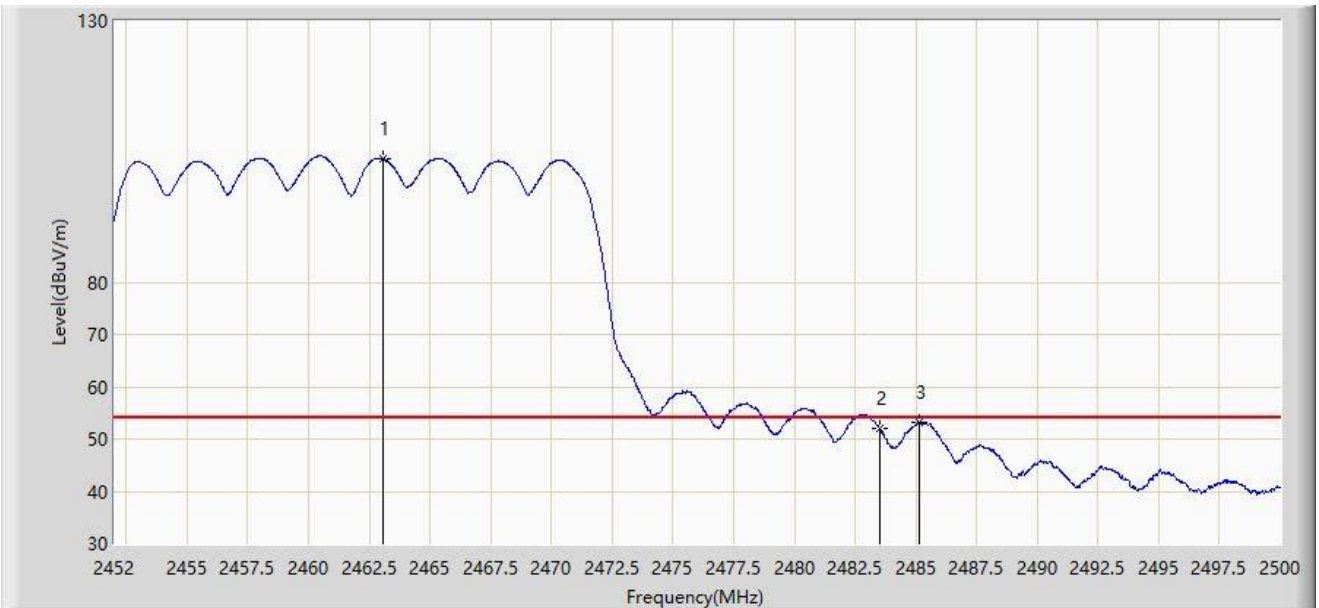


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2463.088        | 103.519                | 72.192               | N/A         | N/A            | 31.327        | AV   |
| 2  |      | 2483.500        | 52.121                 | 20.806               | -1.879      | 54.000         | 31.315        | AV   |
| 3  | *    | 2485.120        | 53.208                 | 21.890               | -0.792      | 54.000         | 31.318        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/18 - 17:27 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at 2422MHz |                          |

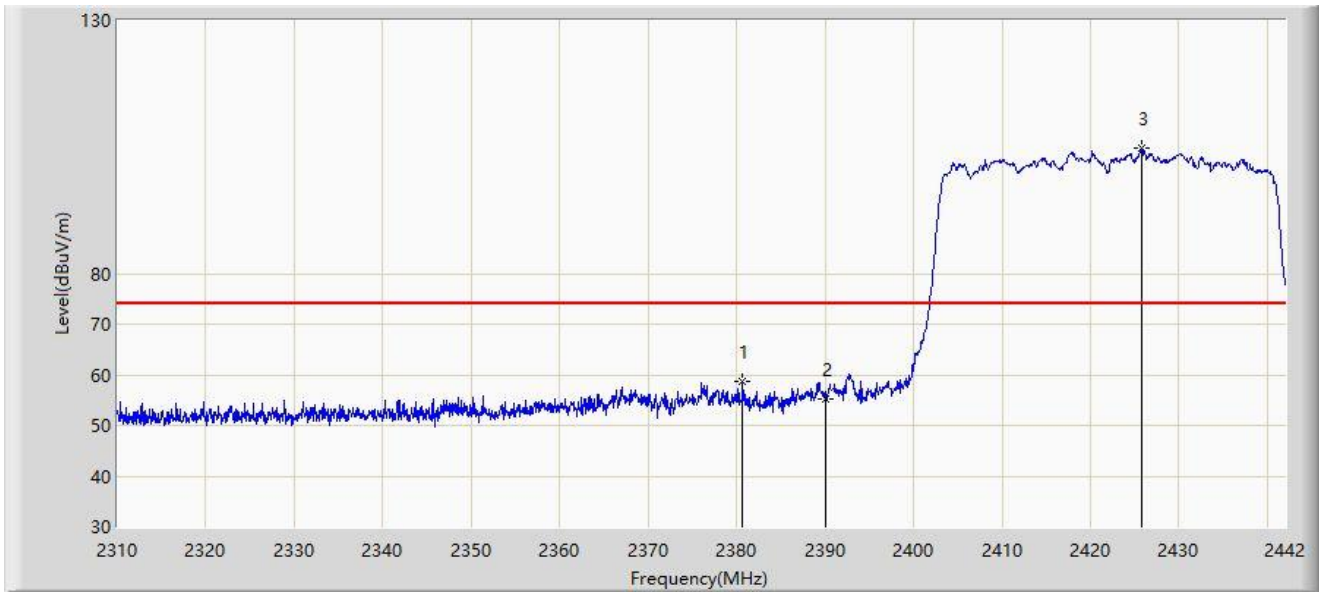


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2380.686        | 58.619                 | 27.202               | -15.381     | 74.000         | 31.417        | PK   |
| 2  |      | 2390.000        | 55.186                 | 23.597               | -18.814     | 74.000         | 31.588        | PK   |
| 3  |      | 2425.830        | 104.678                | 72.974               | N/A         | N/A            | 31.705        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/18 - 17:28 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at 2422MHz |                          |

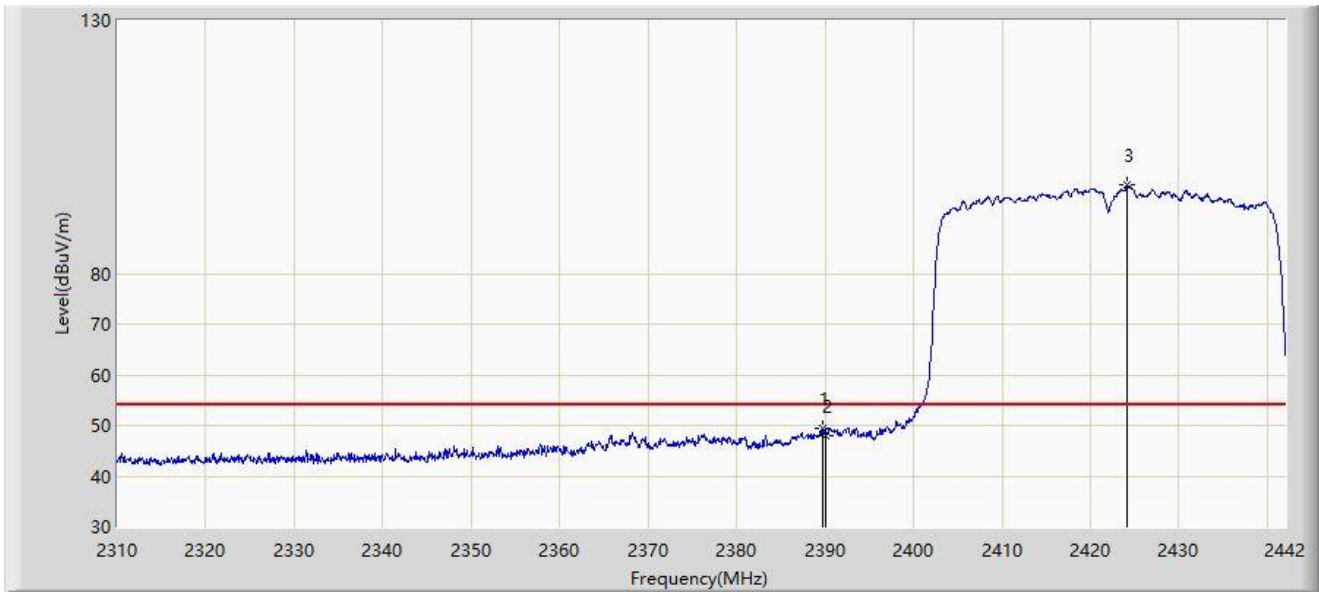


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2389.794        | 49.351                 | 17.766               | -4.649      | 54.000         | 31.584        | AV   |
| 2  |      | 2390.000        | 48.086                 | 16.497               | -5.914      | 54.000         | 31.588        | AV   |
| 3  |      | 2424.114        | 97.560                 | 65.858               | N/A         | N/A            | 31.702        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/18 - 17:26 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at 2422MHz |                          |

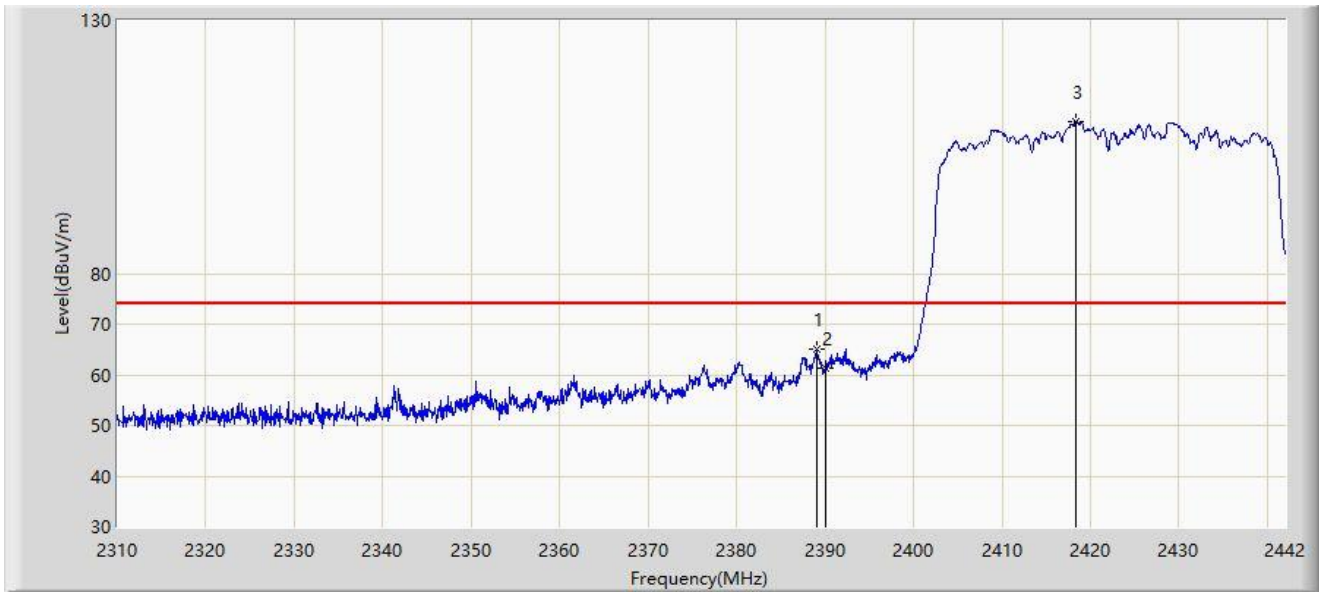


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2389.068        | 65.059                 | 33.488               | -8.941      | 74.000         | 31.571        | PK   |
| 2  |      | 2390.000        | 61.236                 | 29.647               | -12.764     | 74.000         | 31.588        | PK   |
| 3  |      | 2418.306        | 110.016                | 78.322               | N/A         | N/A            | 31.693        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/18 - 17:25 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at 2422MHz |                          |

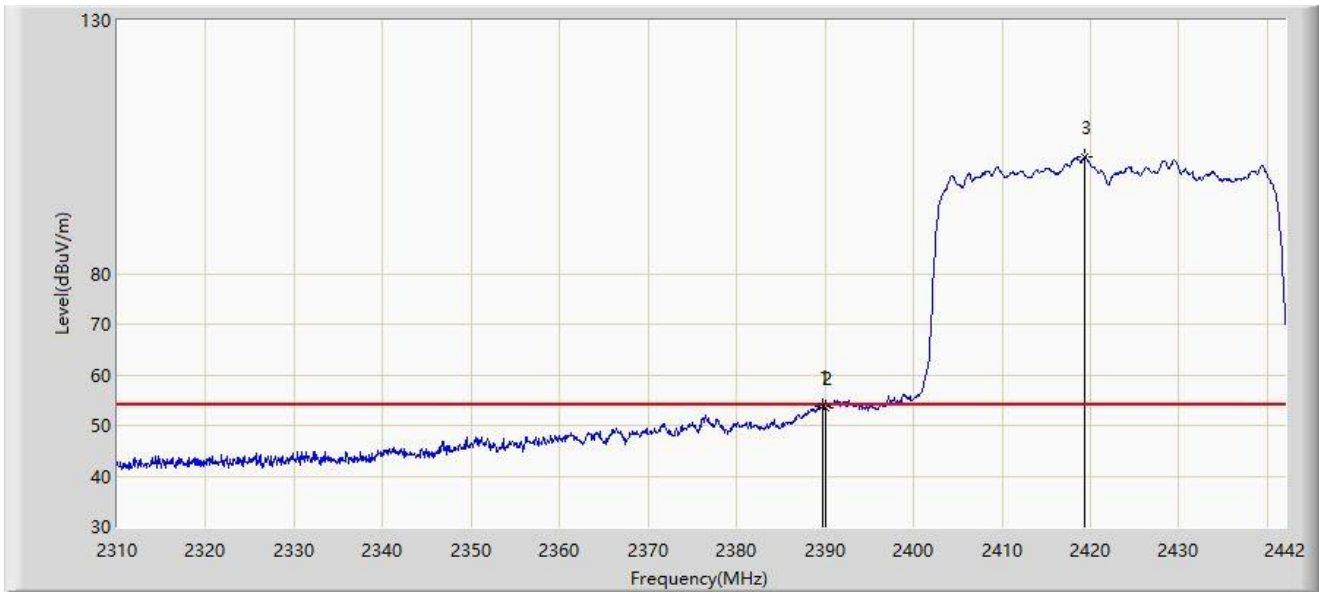


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  | *    | 2389.728        | 53.847                 | 22.263               | -0.153      | 54.000         | 31.583        | AV   |
| 2  |      | 2390.000        | 53.531                 | 21.942               | -0.469      | 54.000         | 31.588        | AV   |
| 3  |      | 2419.362        | 103.134                | 71.439               | N/A         | N/A            | 31.695        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/18 - 23:29 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at 2437MHz |                          |

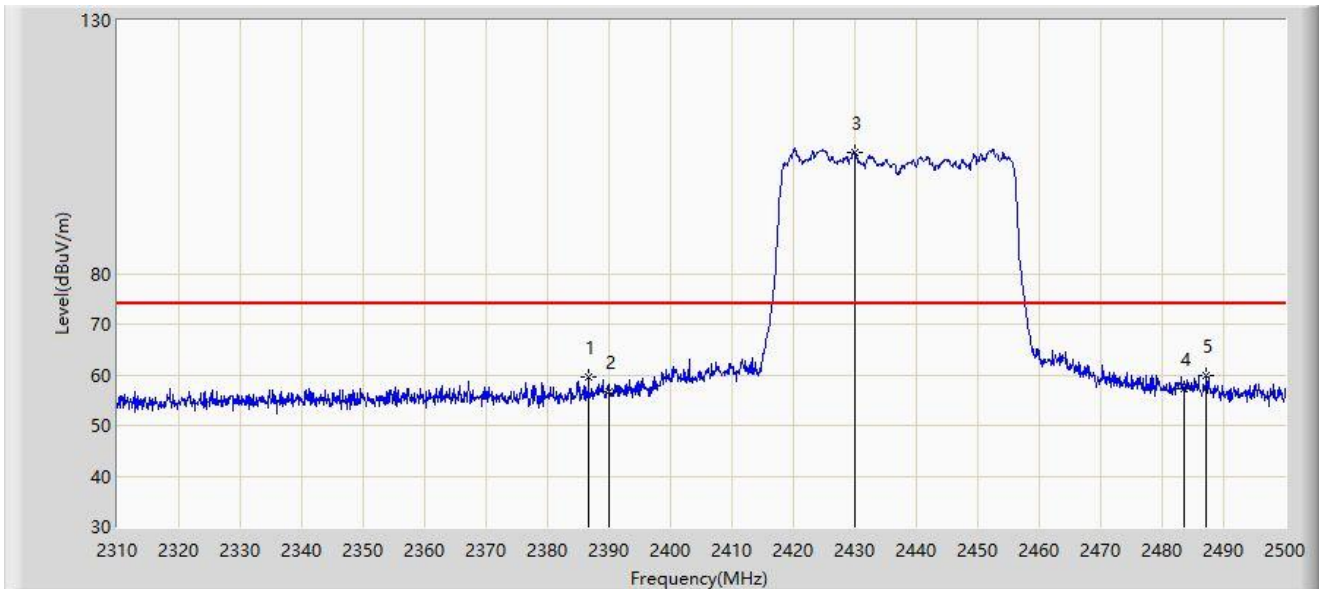


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2386.665        | 59.570                 | 28.043               | -14.430     | 74.000         | 31.527        | PK   |
| 2  |      | 2390.000        | 56.781                 | 25.192               | -17.219     | 74.000         | 31.588        | PK   |
| 3  |      | 2429.890        | 103.889                | 72.177               | N/A         | N/A            | 31.711        | PK   |
| 4  |      | 2483.500        | 57.159                 | 25.287               | -16.841     | 74.000         | 31.872        | PK   |
| 5  | *    | 2487.175        | 59.759                 | 27.888               | -14.241     | 74.000         | 31.871        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/18 - 23:28 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at 2437MHz |                          |

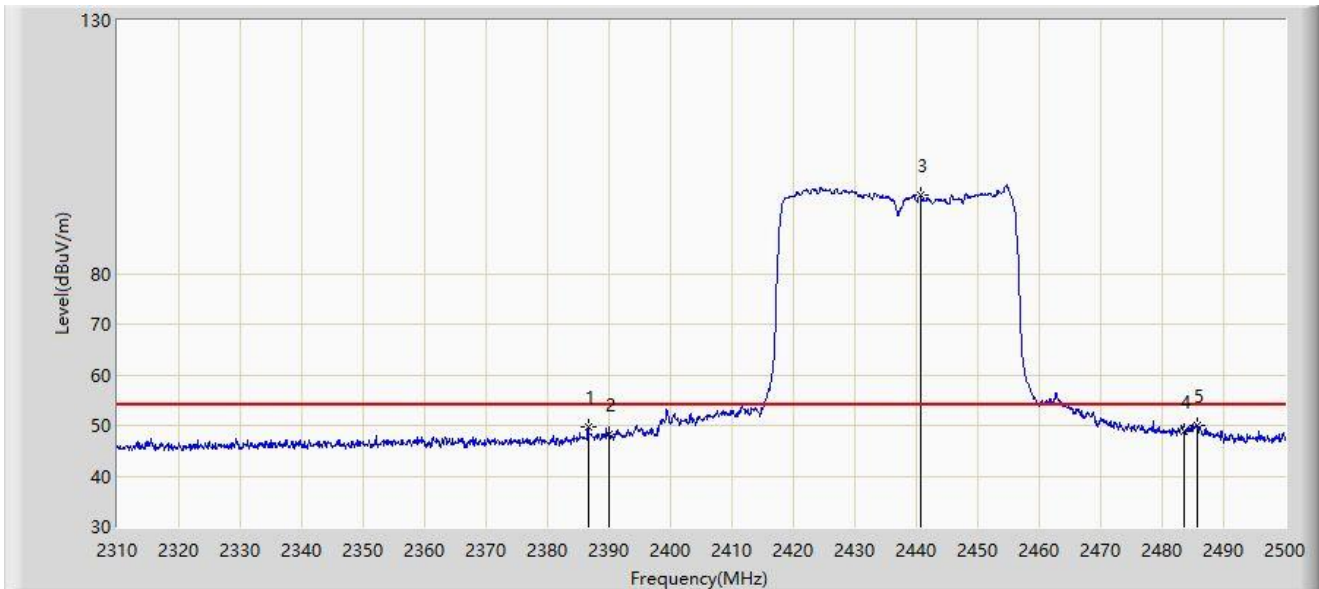


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2386.570        | 49.575                 | 18.050               | -4.425      | 54.000         | 31.525        | AV   |
| 2  |      | 2390.000        | 48.226                 | 16.637               | -5.774      | 54.000         | 31.588        | AV   |
| 3  |      | 2440.625        | 95.434                 | 63.697               | N/A         | N/A            | 31.737        | AV   |
| 4  |      | 2483.500        | 48.873                 | 17.001               | -5.127      | 54.000         | 31.872        | AV   |
| 5  | *    | 2485.750        | 50.111                 | 18.239               | -3.889      | 54.000         | 31.871        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/18 - 23:26 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at 2437MHz |                          |

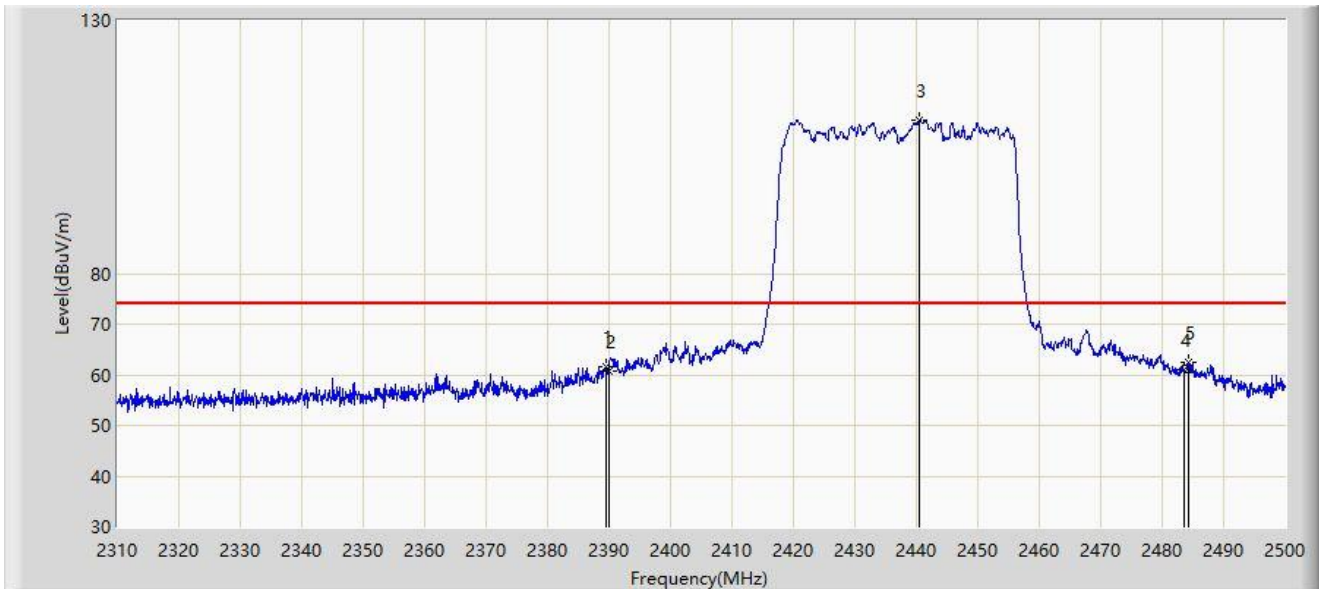


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2389.420        | 61.559                 | 29.981               | -12.441     | 74.000         | 31.578        | PK   |
| 2  |      | 2390.000        | 60.673                 | 29.084               | -13.327     | 74.000         | 31.588        | PK   |
| 3  |      | 2440.435        | 110.340                | 78.603               | N/A         | N/A            | 31.737        | PK   |
| 4  |      | 2483.500        | 61.050                 | 29.178               | -12.950     | 74.000         | 31.872        | PK   |
| 5  | *    | 2484.230        | 62.582                 | 30.710               | -11.418     | 74.000         | 31.872        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/18 - 23:20 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at 2437MHz |                          |

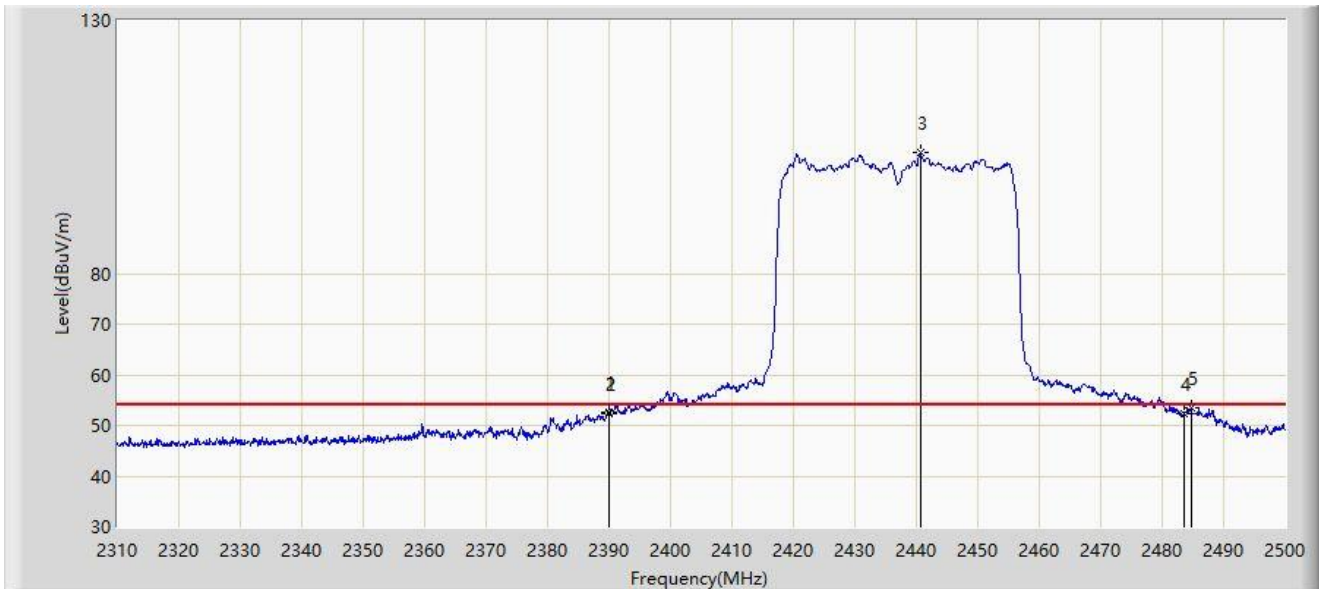


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2389.895        | 52.542                 | 20.955               | -1.458      | 54.000         | 31.587        | AV   |
| 2  |      | 2390.000        | 52.450                 | 20.861               | -1.550      | 54.000         | 31.588        | AV   |
| 3  |      | 2440.625        | 103.850                | 72.113               | N/A         | N/A            | 31.737        | AV   |
| 4  |      | 2483.500        | 52.342                 | 20.470               | -1.658      | 54.000         | 31.872        | AV   |
| 5  | *    | 2484.705        | 53.560                 | 21.688               | -0.440      | 54.000         | 31.871        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/18 - 17:37 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at 2452MHz |                          |

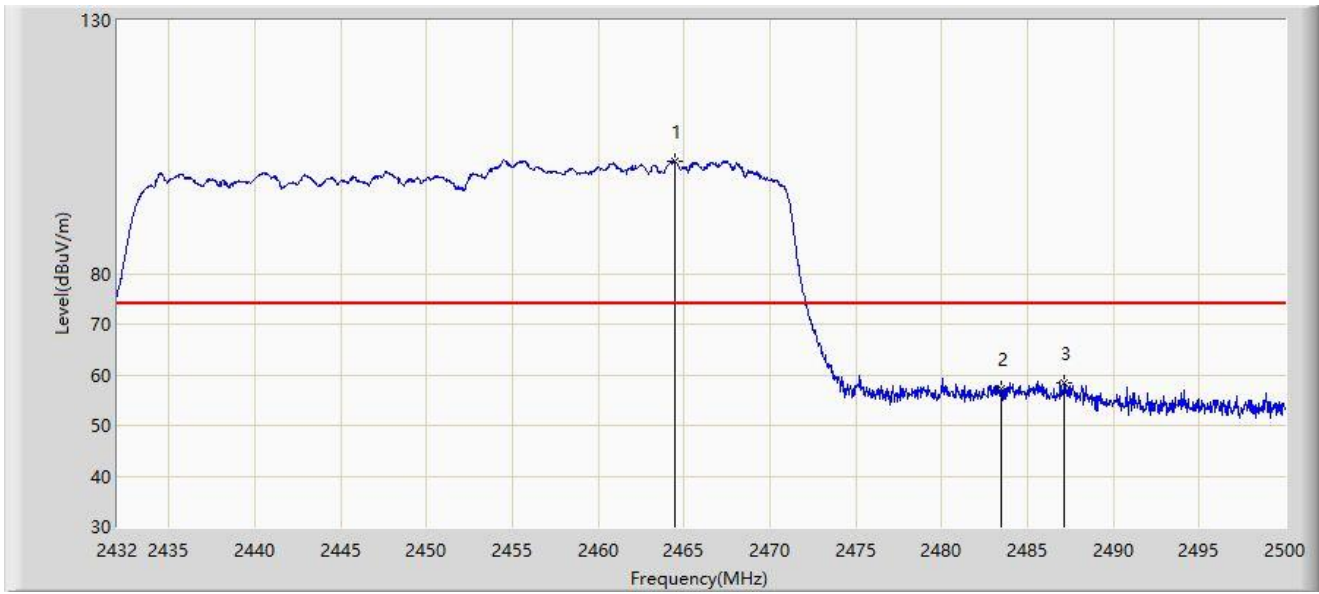


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2464.470        | 102.229                | 70.385               | N/A         | N/A            | 31.844        | PK   |
| 2  |      | 2483.500        | 57.113                 | 25.241               | -16.887     | 74.000         | 31.872        | PK   |
| 3  | *    | 2487.148        | 58.485                 | 26.614               | -15.515     | 74.000         | 31.871        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/18 - 17:38 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Horizontal     |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at 2452MHz |                          |

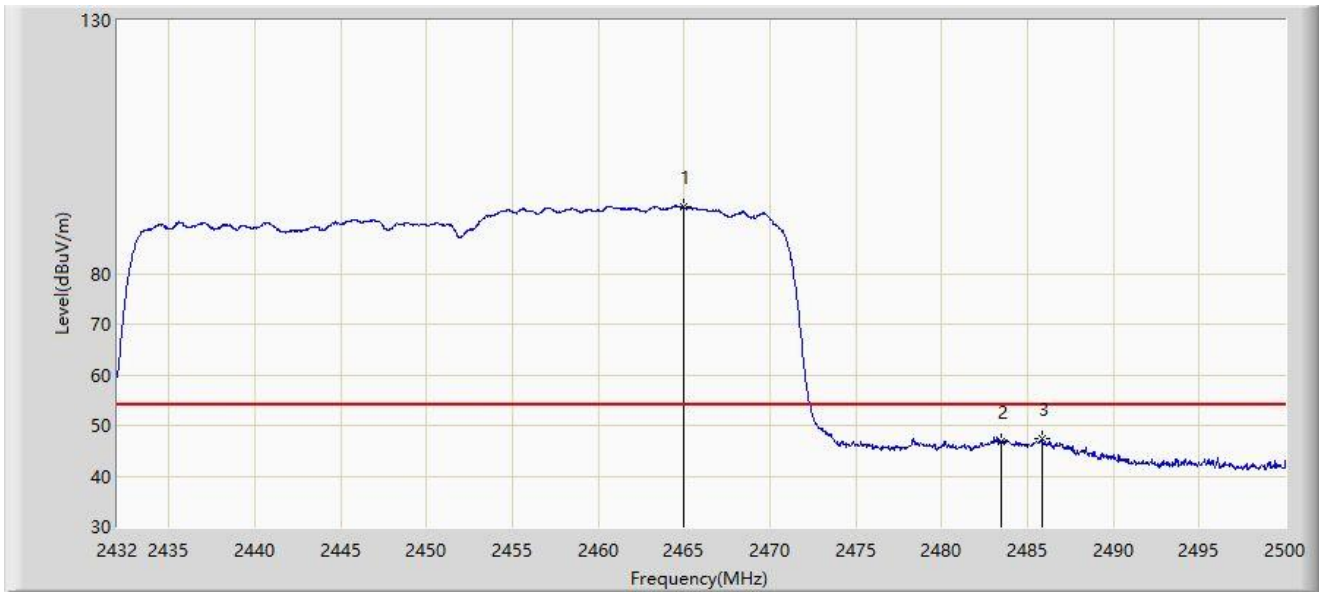


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2464.946        | 93.233                 | 61.388               | N/A         | N/A            | 31.845        | AV   |
| 2  |      | 2483.500        | 46.698                 | 14.826               | -7.302      | 54.000         | 31.872        | AV   |
| 3  | *    | 2485.856        | 47.335                 | 15.464               | -6.665      | 54.000         | 31.872        | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/18 - 17:36 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at 2452MHz |                          |

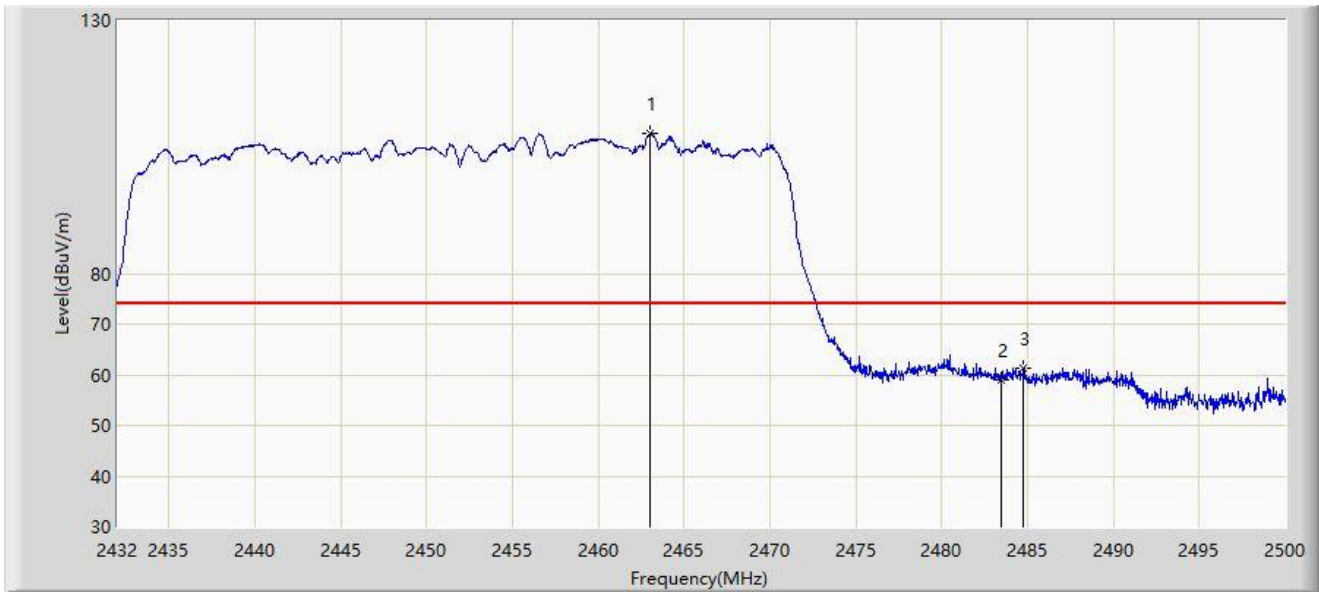


| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2463.008        | 107.634                | 75.793               | N/A         | N/A            | 31.841        | PK   |
| 2  |      | 2483.500        | 58.925                 | 27.053               | -15.075     | 74.000         | 31.872        | PK   |
| 3  | *    | 2484.768        | 61.233                 | 29.361               | -12.767     | 74.000         | 31.872        | PK   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                 |                          |
|-------------------------------------------------|--------------------------|
| Site: SIP-AC1                                   | Time: 2022/05/18 - 17:34 |
| Limit: FCC_2.4G_RE(3m)                          | Engineer: Arvin          |
| Probe: HF907_102862_1-18GHz                     | Polarity: Vertical       |
| EUT: Wi-Fi 6 DSL Modem Gateway                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at 2452MHz |                          |

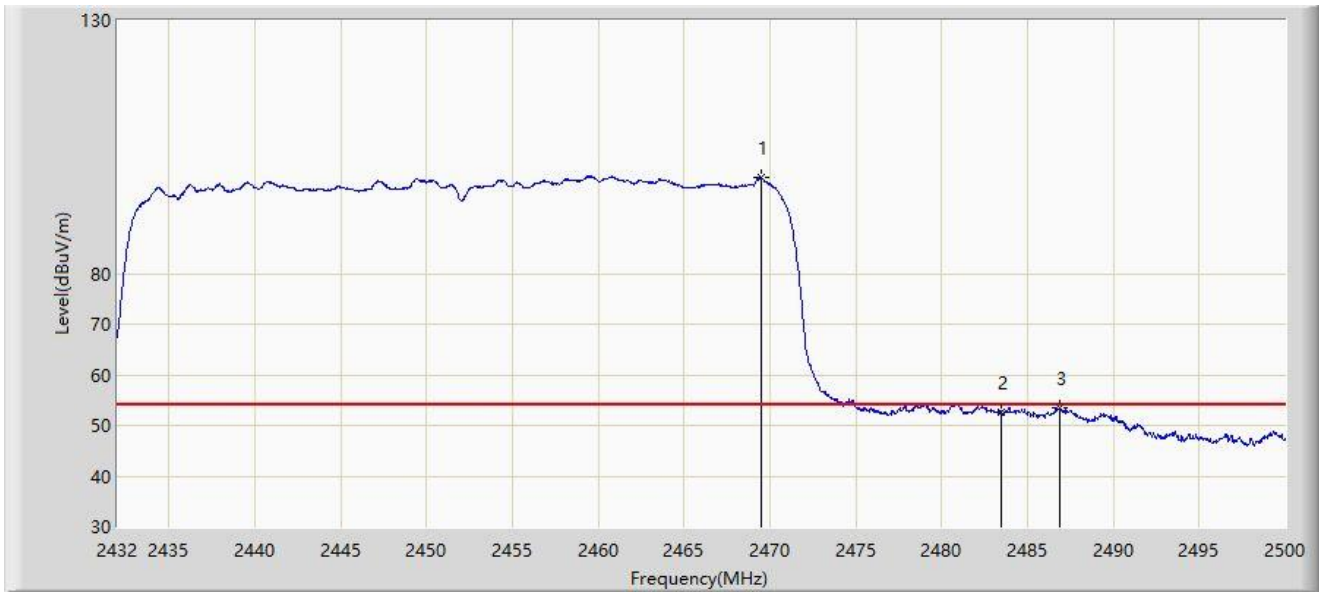

| No | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | 2469.468        | 99.100                 | 67.246               | N/A         | N/A            | 31.854        | AV   |
| 2  |      | 2483.500        | 52.525                 | 20.653               | -1.475      | 54.000         | 31.872        | AV   |
| 3  | *    | 2486.876        | 53.552                 | 21.681               | -0.448      | 54.000         | 31.871        | AV   |


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

## A.8 AC Conducted Emissions Test Result

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: WZ-SR2                                             | Time: 2022/06/01 - 11:37 |
| Limit: FCC_Part15.207_CE_AC Power                        | Engineer: Helen Han      |
| Probe: ENV216_101683_Filter Off_E                        | Polarity: Line           |
| EUT: Wi-Fi 6 DSL Modem Gateway                           | Power: AC 120V/60Hz      |
| <b>Test Mode:</b> Transmit by 802.11b at channel 2437MHz |                          |

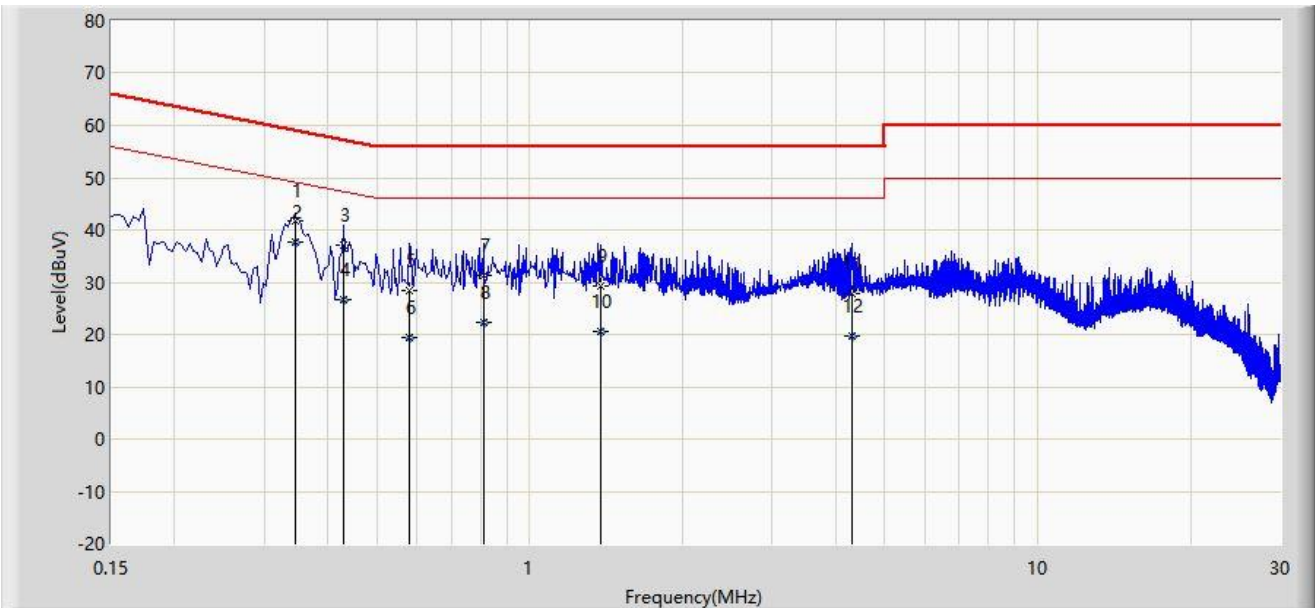


| No | Mark | Frequency (MHz) | Measure Level (dBμV) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV) | Factor (dB) | Type |
|----|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      | 0.346           | 41.740               | 31.831               | -17.318     | 59.058       | 9.909       | QP   |
| 2  | *    | 0.346           | 37.783               | 27.874               | -11.275     | 49.058       | 9.909       | AV   |
| 3  |      | 0.430           | 37.045               | 27.130               | -20.207     | 57.253       | 9.915       | QP   |
| 4  |      | 0.430           | 26.725               | 16.810               | -20.528     | 47.253       | 9.915       | AV   |
| 5  |      | 0.578           | 28.399               | 18.476               | -27.601     | 56.000       | 9.923       | QP   |
| 6  |      | 0.578           | 19.337               | 9.414                | -26.663     | 46.000       | 9.923       | AV   |
| 7  |      | 0.810           | 31.185               | 21.248               | -24.815     | 56.000       | 9.937       | QP   |
| 8  |      | 0.810           | 22.436               | 12.500               | -23.564     | 46.000       | 9.937       | AV   |
| 9  |      | 1.378           | 29.351               | 19.393               | -26.649     | 56.000       | 9.958       | QP   |
| 10 |      | 1.378           | 20.460               | 10.502               | -25.540     | 46.000       | 9.958       | AV   |
| 11 |      | 4.302           | 27.822               | 17.430               | -28.178     | 56.000       | 10.393      | QP   |
| 12 |      | 4.302           | 19.602               | 9.209                | -26.398     | 46.000       | 10.393      | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: WZ-SR2                                             | Time: 2022/06/01 - 11:44 |
| Limit: FCC_Part15.207_CE_AC Power                        | Engineer: Helen Han      |
| Probe: ENV216_101683_Filter Off_E                        | Polarity: Neutral        |
| EUT: Wi-Fi 6 DSL Modem Gateway                           | Power: AC 120V/60Hz      |
| <b>Test Mode:</b> Transmit by 802.11b at channel 2437MHz |                          |

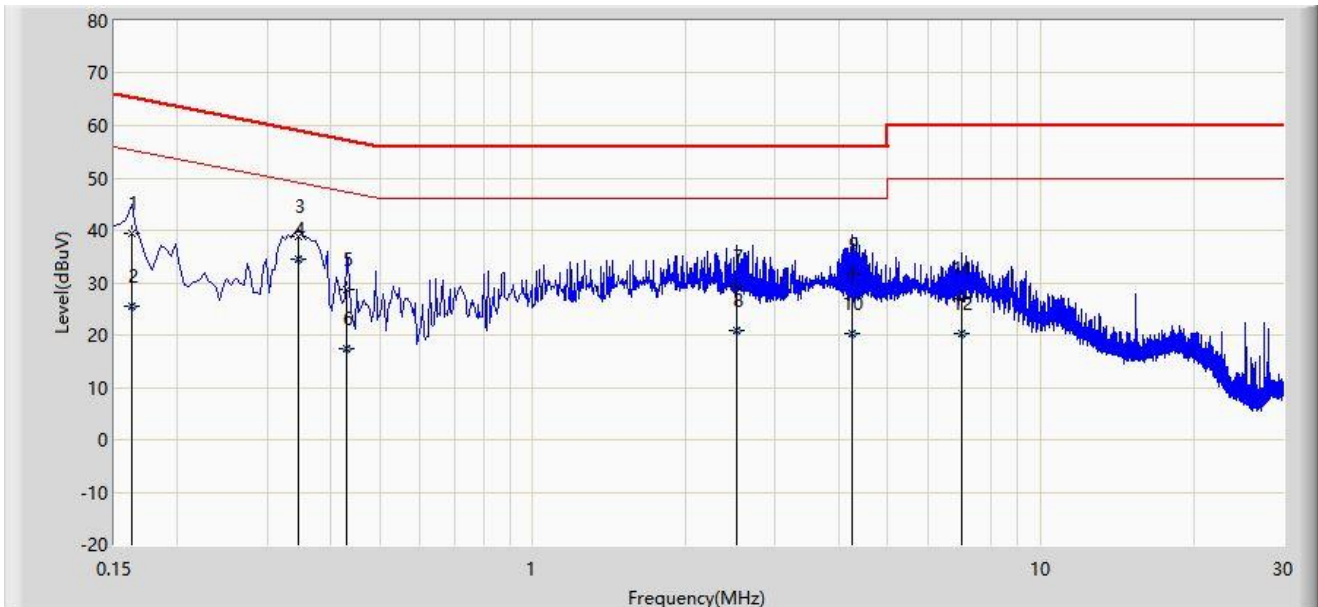

| No | Mark | Frequency (MHz) | Measure Level (dBμV) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV) | Factor (dB) | Type |
|----|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      | 0.162           | 39.300               | 29.383               | -26.061     | 65.361       | 9.917       | QP   |
| 2  |      | 0.162           | 25.430               | 15.512               | -29.931     | 55.361       | 9.917       | AV   |
| 3  |      | 0.346           | 38.751               | 28.832               | -20.307     | 59.058       | 9.919       | QP   |
| 4  | *    | 0.346           | 34.381               | 24.461               | -14.677     | 49.058       | 9.919       | AV   |
| 5  |      | 0.430           | 28.602               | 18.677               | -28.651     | 57.253       | 9.925       | QP   |
| 6  |      | 0.430           | 17.263               | 7.338                | -29.989     | 47.253       | 9.925       | AV   |
| 7  |      | 2.518           | 29.391               | 19.308               | -26.609     | 56.000       | 10.084      | QP   |
| 8  |      | 2.518           | 20.828               | 10.745               | -25.172     | 46.000       | 10.084      | AV   |
| 9  |      | 4.262           | 31.510               | 21.113               | -24.490     | 56.000       | 10.397      | QP   |
| 10 |      | 4.262           | 20.260               | 9.863                | -25.740     | 46.000       | 10.397      | AV   |
| 11 |      | 7.006           | 26.862               | 16.210               | -33.138     | 60.000       | 10.652      | QP   |
| 12 |      | 7.006           | 20.315               | 9.663                | -29.685     | 50.000       | 10.652      | AV   |

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

## **Appendix B – Test Setup Photograph**

Refer to “2205RSU015-UT” file.

## **Appendix C – EUT Photograph**

Refer to “2205RSU015-UE” file.

\_\_\_\_\_ The End \_\_\_\_\_