


802.11ac-VHT40 Power Spectral Density- Ant 3


Channel 134 (5670 MHz)




Channel 142(5710 MHz)

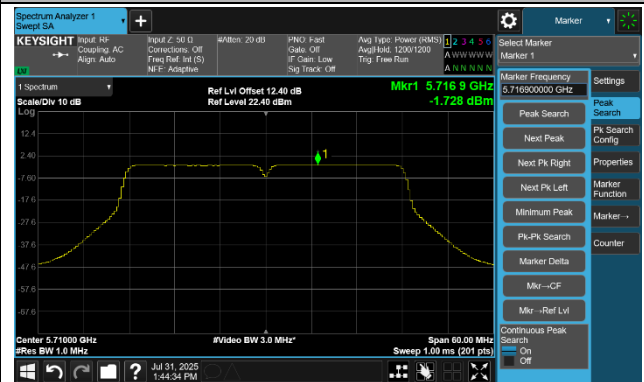

Channel 151 (5755 MHz)

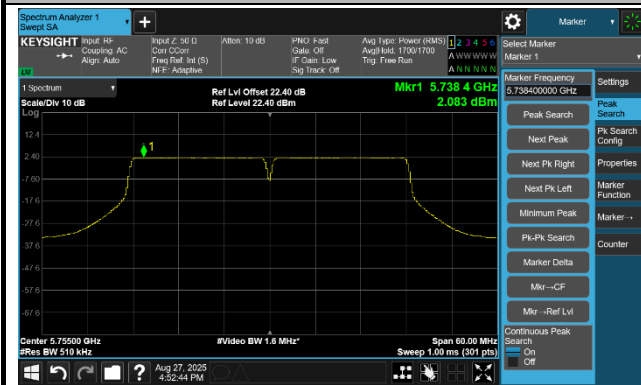

Channel 159 (5795 MHz)

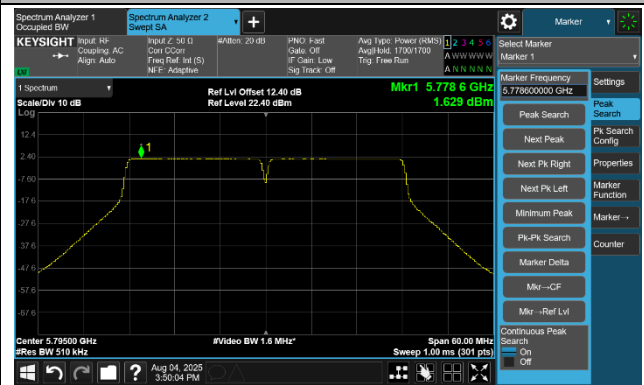


802.11ac-VHT80 Power Spectral Density- Ant 3


Channel 42 (5210 MHz)



Channel 58 (5290 MHz)

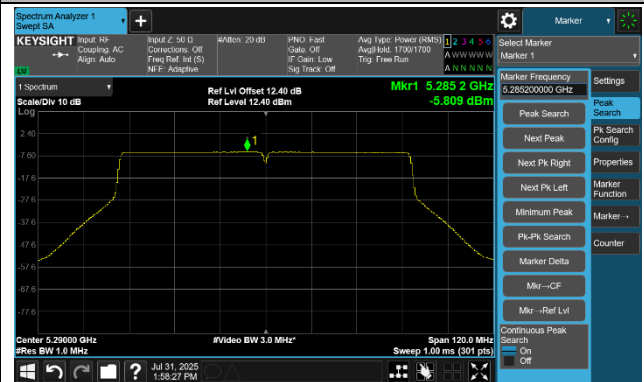


Channel 106 (5530 MHz)

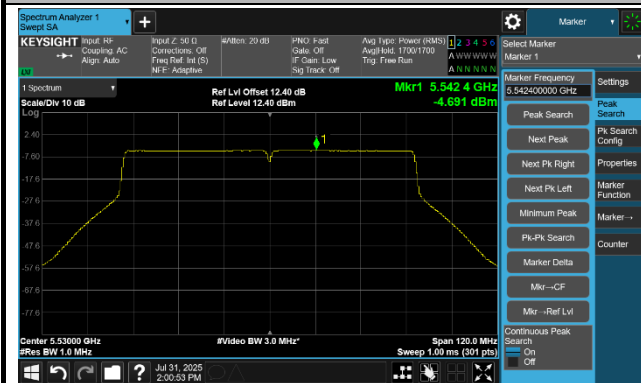

Channel 122 (5610 MHz)




Channel 138 (5690 MHz)

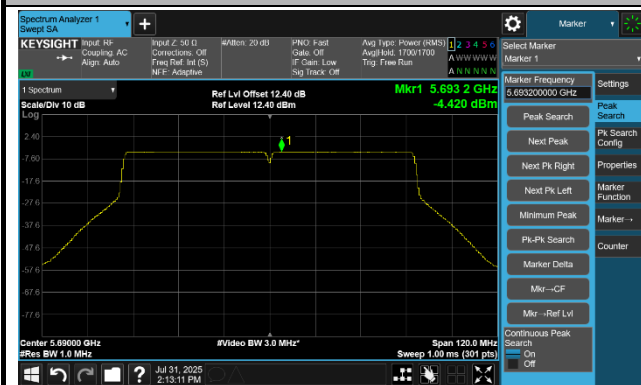


Channel 155 (5775 MHz)



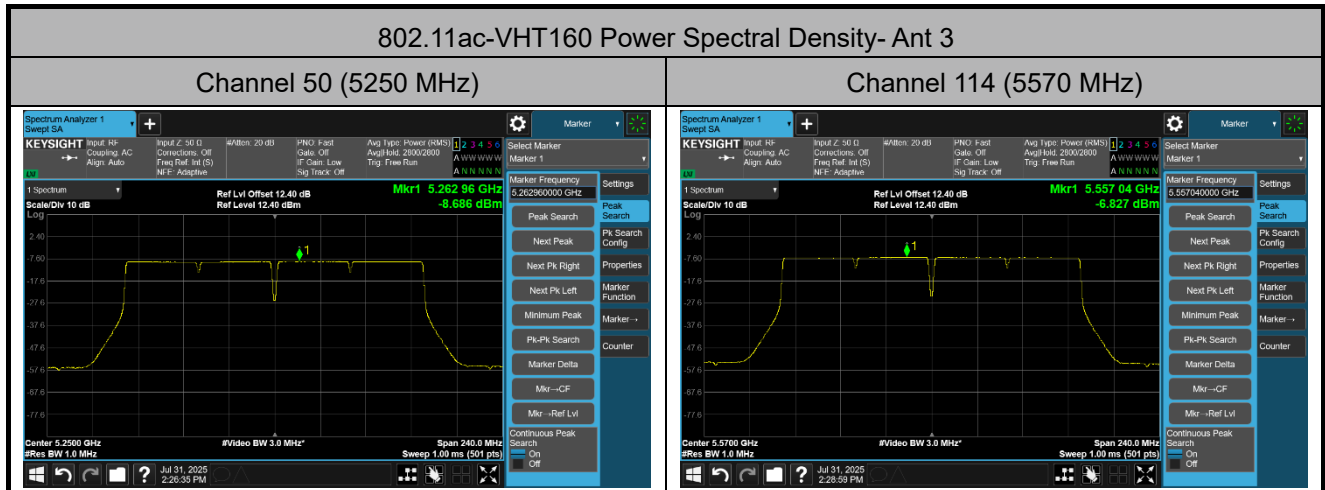


802.11ax-HE20 Power Spectral Density- Ant 3


Channel 36 (5180 MHz)

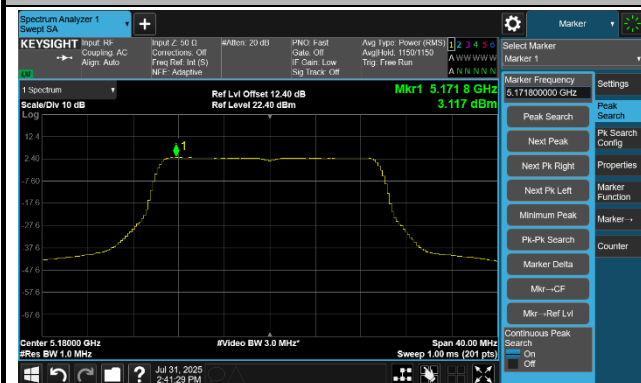


Channel 44 (5220 MHz)

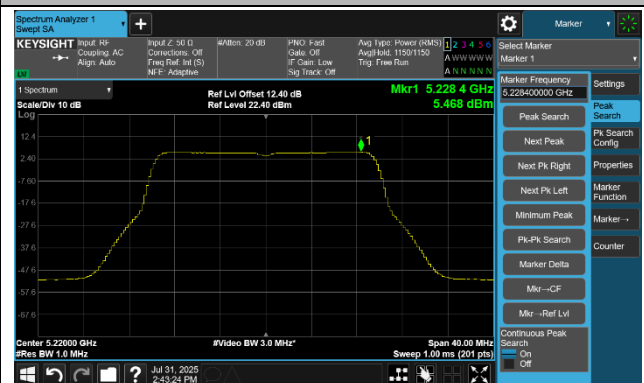


Channel 48 (5240 MHz)

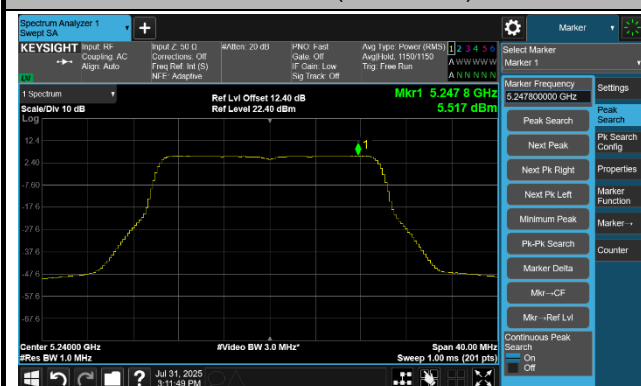


Channel 52 (5260 MHz)

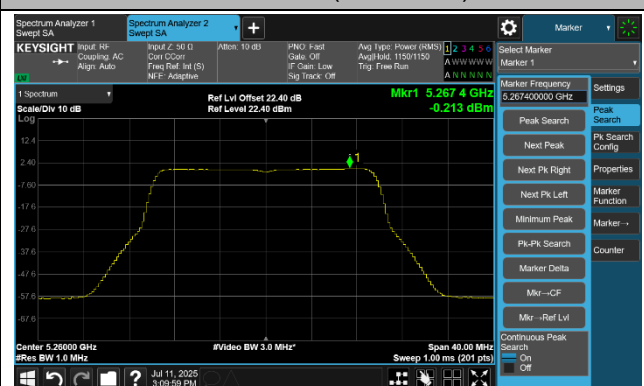

Channel 60 (5300 MHz)

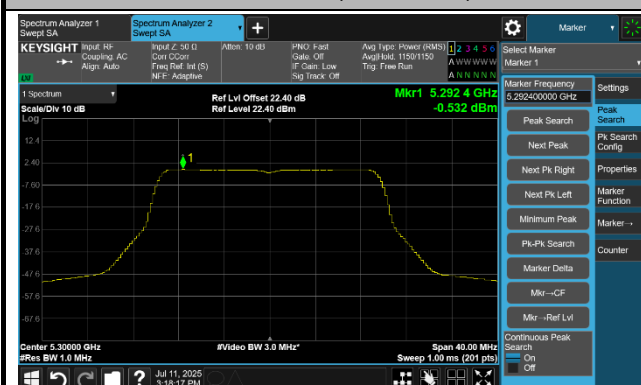


Channel 64 (5320 MHz)

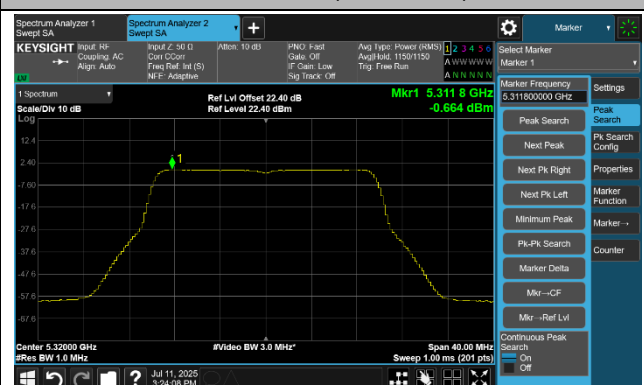

802.11ax-HE20 Power Spectral Density- Ant 3


Channel 100 (5500 MHz)

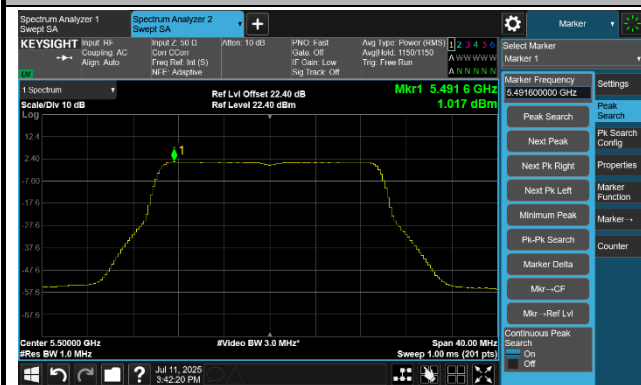


Channel 116 (5580 MHz)




Channel 140 (5700 MHz)

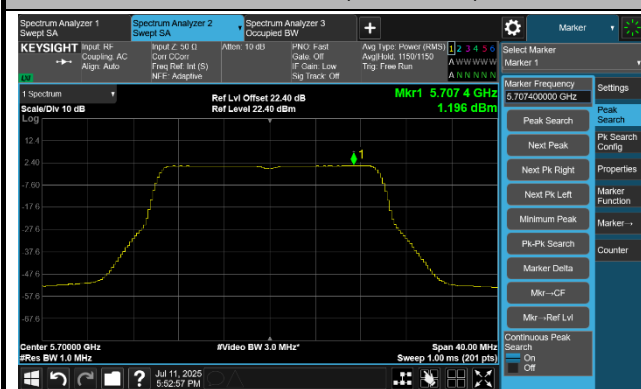


Channel 144(5720 MHz)

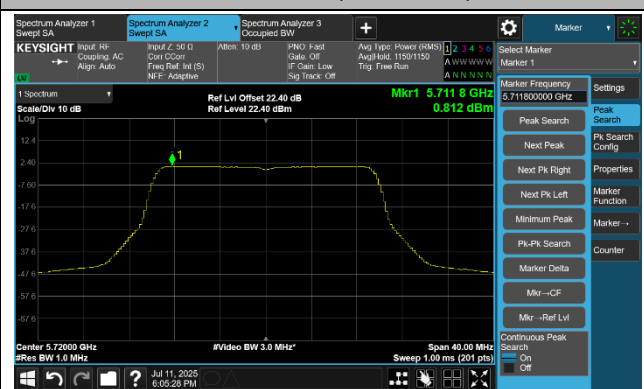


Channel 149 (5745 MHz)

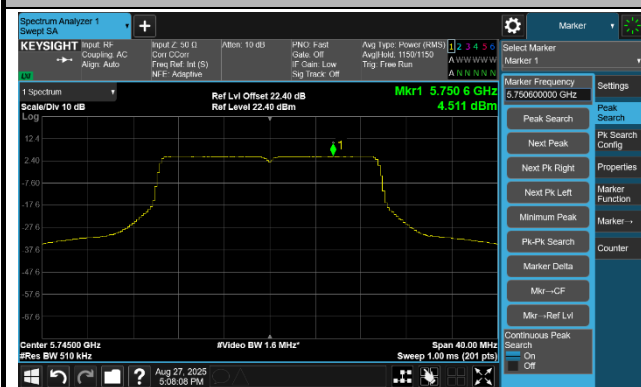

Channel 157 (5785 MHz)

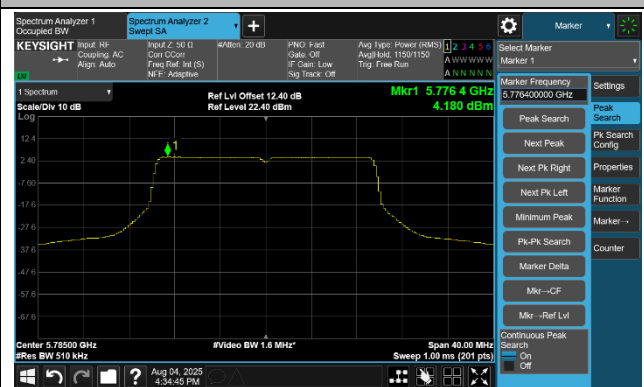

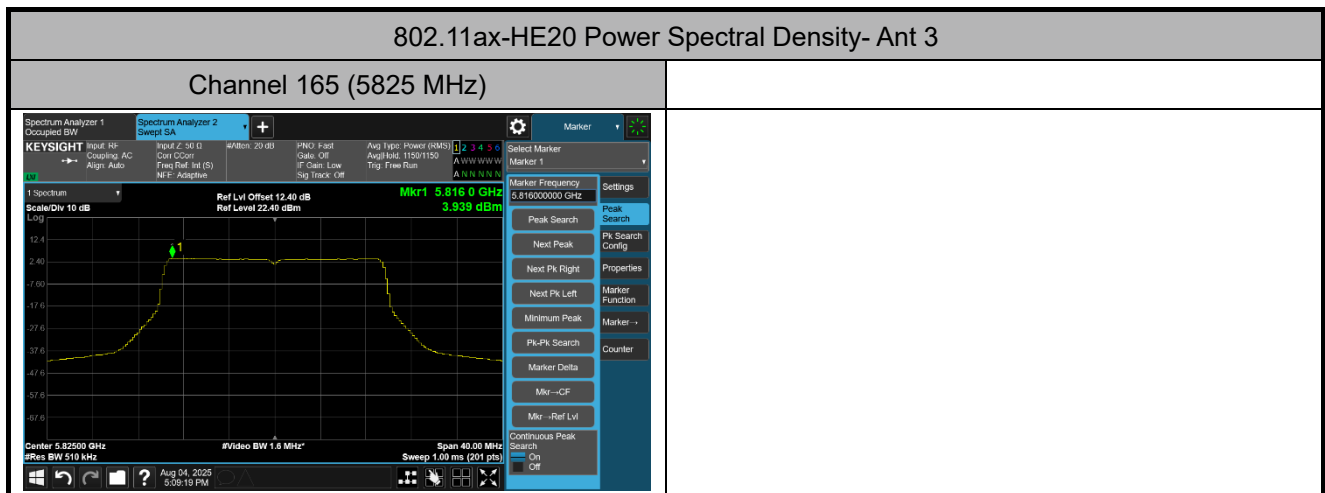


802.11ax-HE40 Power Spectral Density- Ant 3


Channel 38 (5190 MHz)




Channel 46 (5230 MHz)

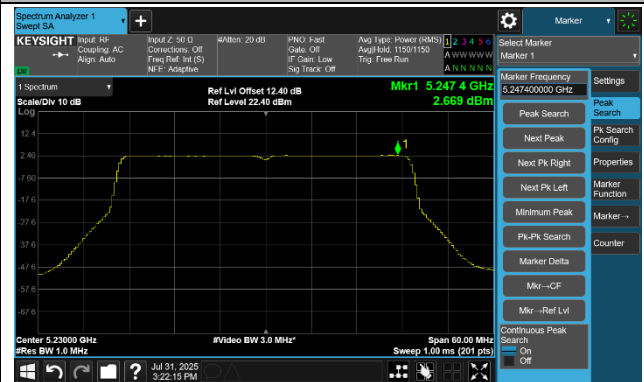

Channel 54 (5270 MHz)

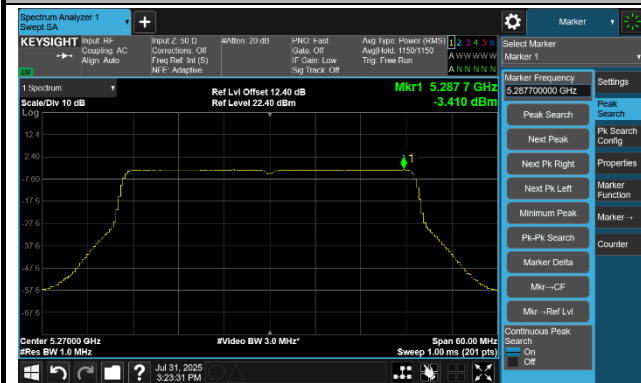


Channel 62 (5310 MHz)

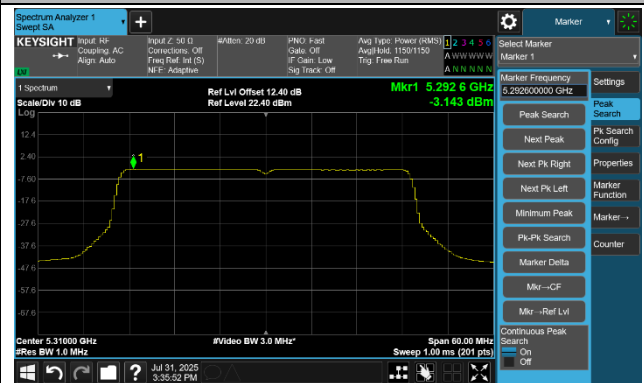

Channel 102 (5510 MHz)



Channel 110 (5550 MHz)

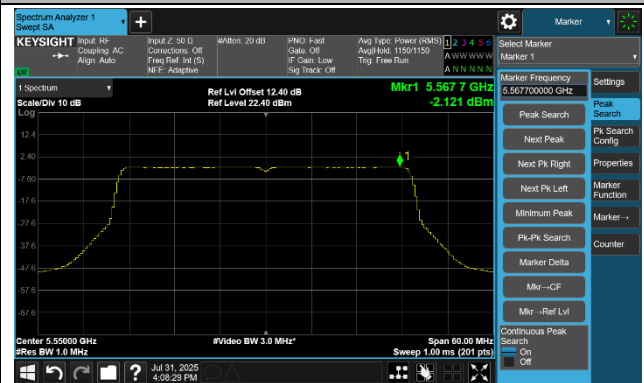


802.11ax-HE40 Power Spectral Density- Ant 3


Channel 134 (5670 MHz)




Channel 142 (5710 MHz)

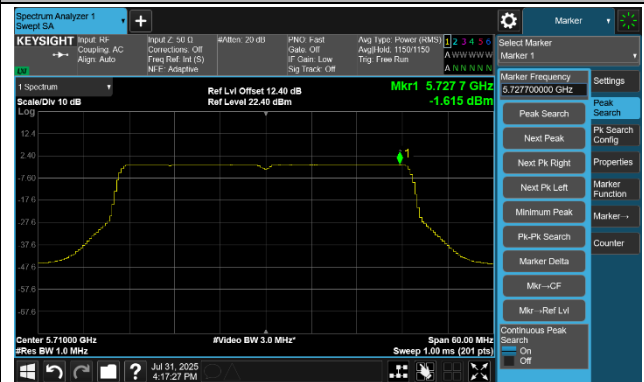

Channel 151 (5755 MHz)

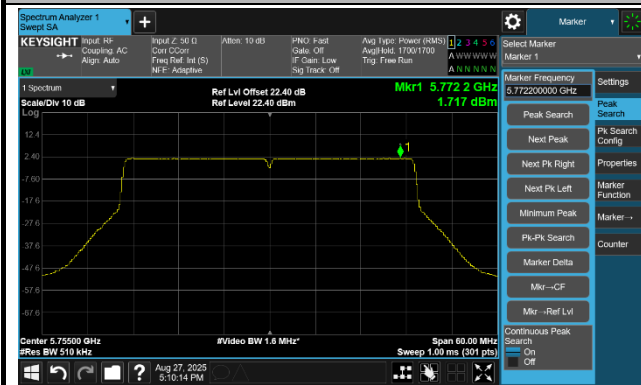

Channel 159 (5795 MHz)

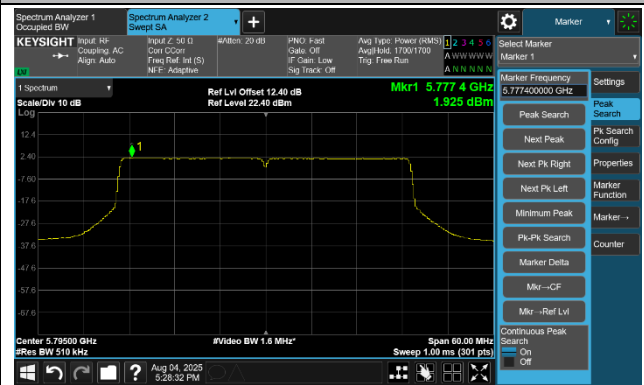

802.11ax-HE80 Power Spectral Density- Ant 3


Channel 42 (5210 MHz)



Channel 58 (5290 MHz)




Channel 106 (5530 MHz)

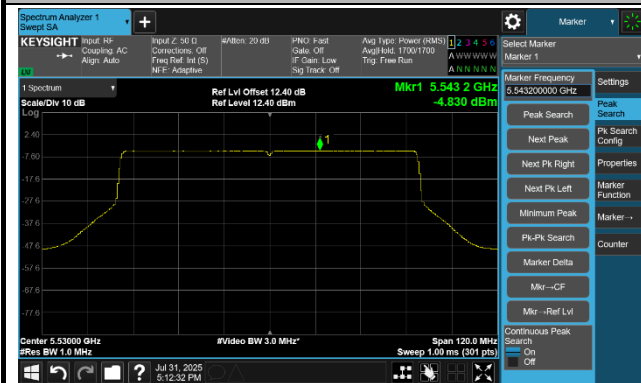


Channel 122 (5610 MHz)



Channel 138 (5690 MHz)

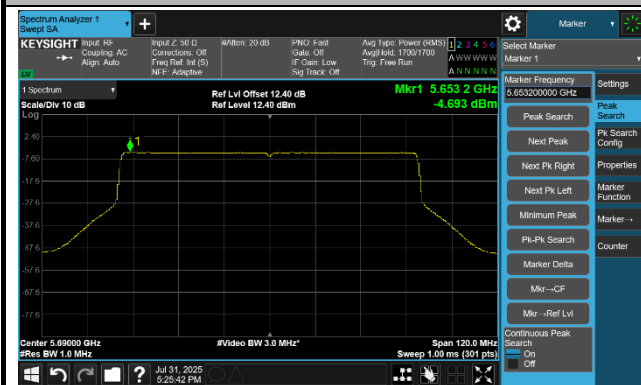

Channel 155 (5775 MHz)

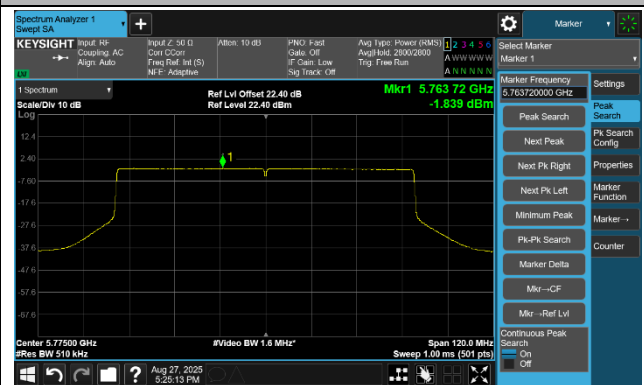

802.11ax-HE160 Power Spectral Density- Ant 3

Channel 50 (5250 MHz)




Channel 114 (5570 MHz)




802.11be-EHT20 Power Spectral Density- Ant 3


Channel 36 (5180 MHz)

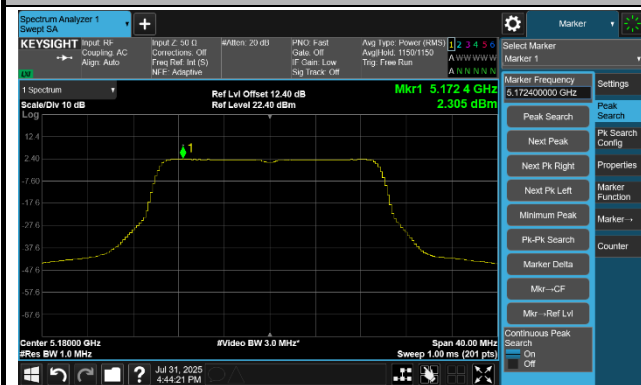


Channel 44 (5220 MHz)

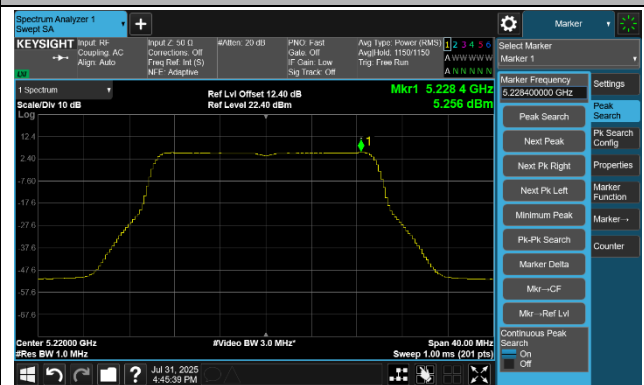

Channel 48 (5240 MHz)

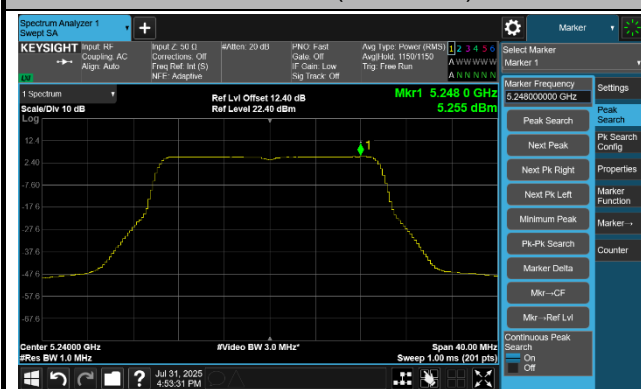


Channel 52 (5260 MHz)

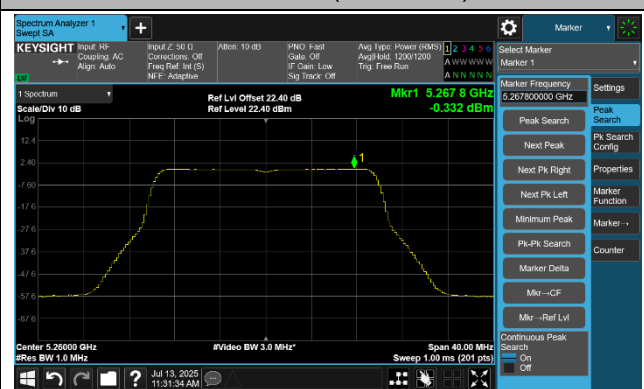

Channel 60 (5300 MHz)




Channel 64 (5320 MHz)

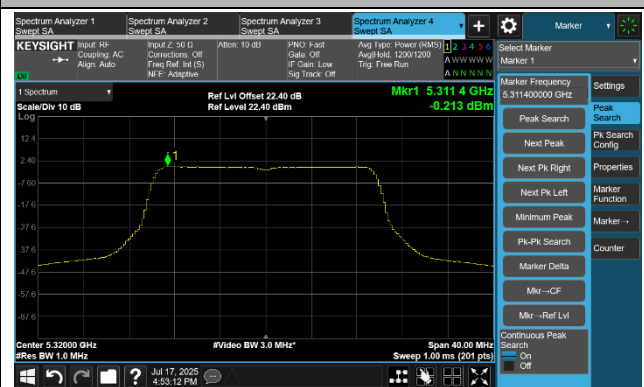

802.11be-EHT20 Power Spectral Density- Ant 3


Channel 100 (5500 MHz)

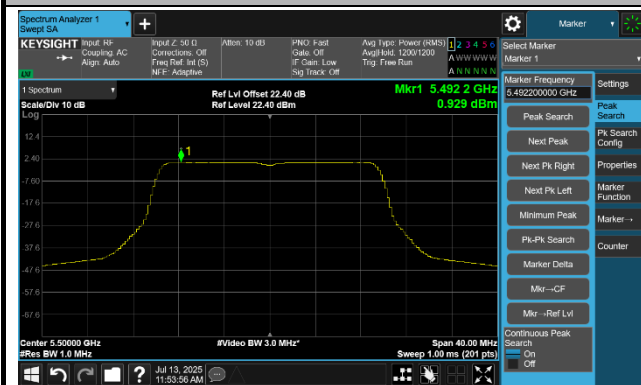


Channel 116 (5580 MHz)



Channel 140 (5700 MHz)

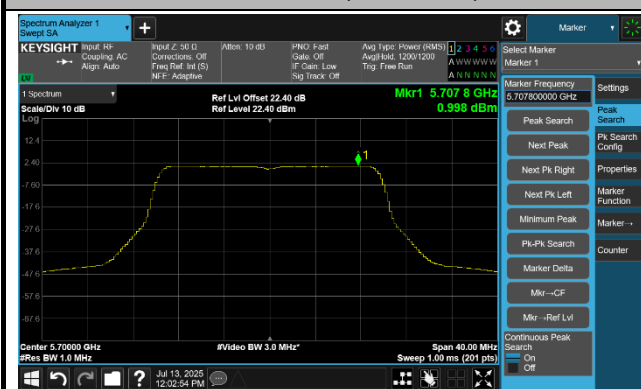


Channel 144 (5720 MHz)

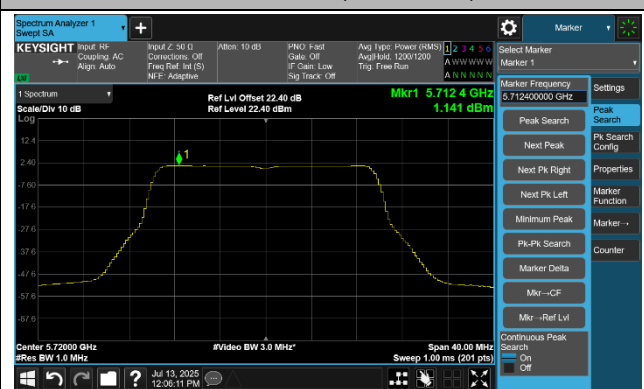

Channel 149 (5745 MHz)




Channel 157 (5785 MHz)

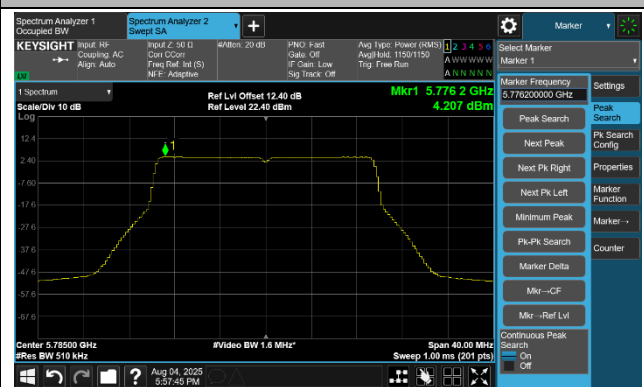

802.11be-EHT20 Power Spectral Density- Ant 3

Channel 165 (5825 MHz)

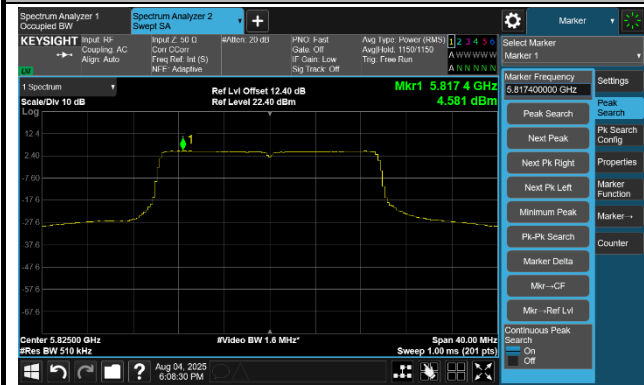


802.11be-EHT40 Power Spectral Density- Ant 3


Channel 38 (5190 MHz)



Channel 46 (5230 MHz)

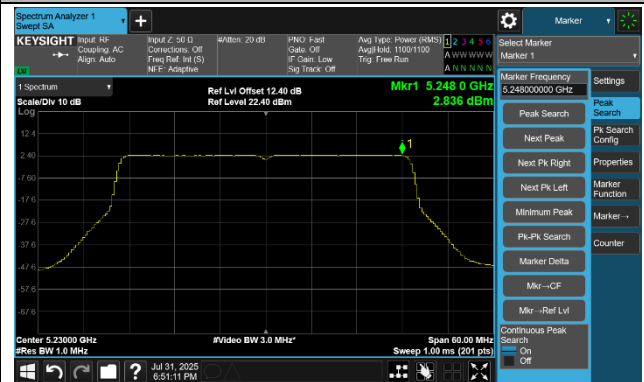


Channel 54 (5270 MHz)

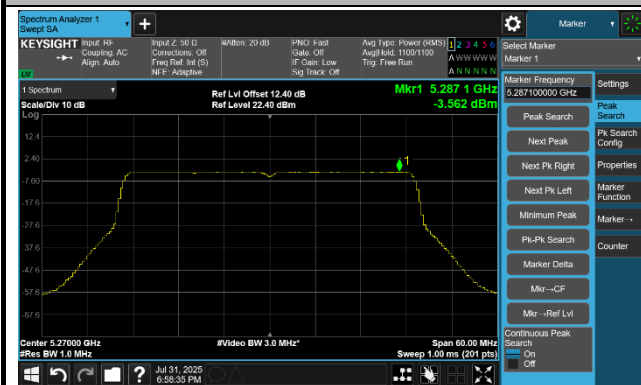


Channel 62 (5310 MHz)



Channel 102 (5510 MHz)

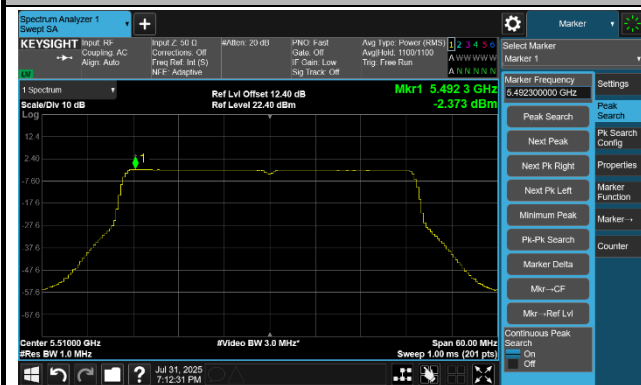

Channel 110 (5550 MHz)

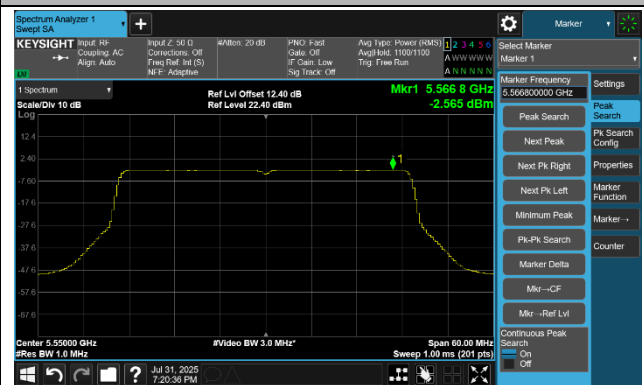


802.11be-EHT40 Power Spectral Density- Ant 3

Channel 134 (5670 MHz)




Channel 142(5710 MHz)

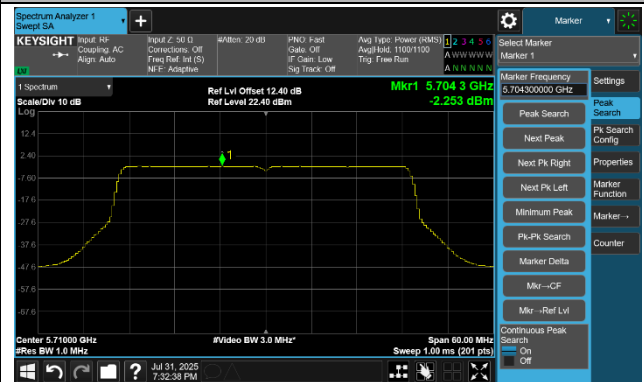

Channel 151 (5755 MHz)




Channel 159 (5795 MHz)

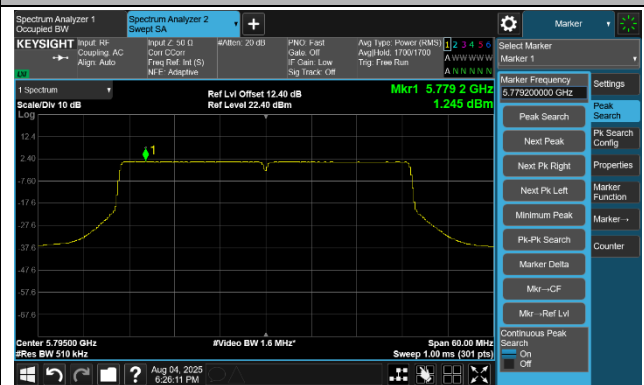


802.11be-EHT80 Power Spectral Density- Ant 3


Channel 42 (5210 MHz)

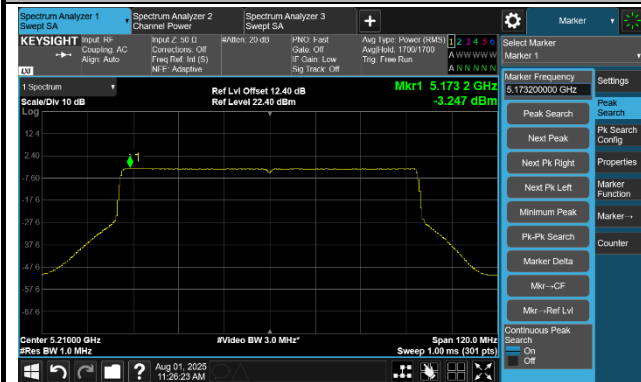


Channel 58 (5290 MHz)

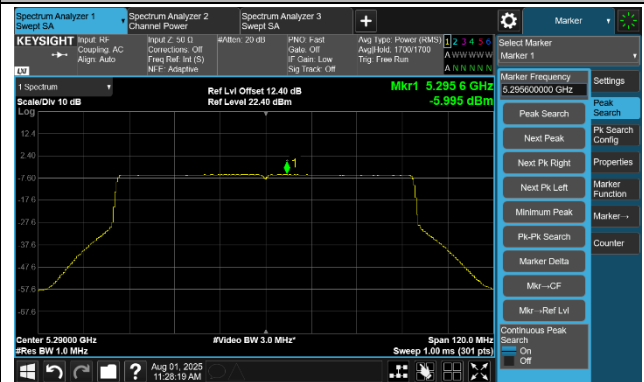


Channel 106 (5530 MHz)

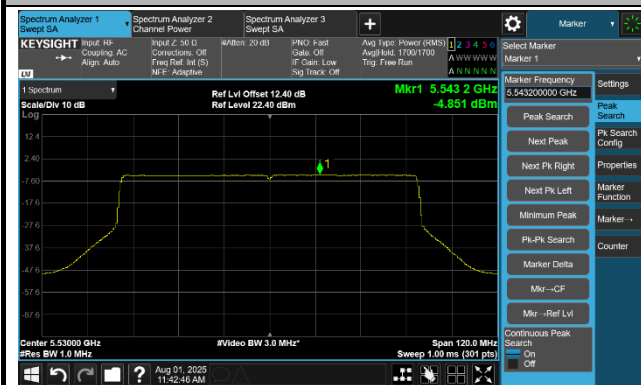

Channel 122 (5610 MHz)

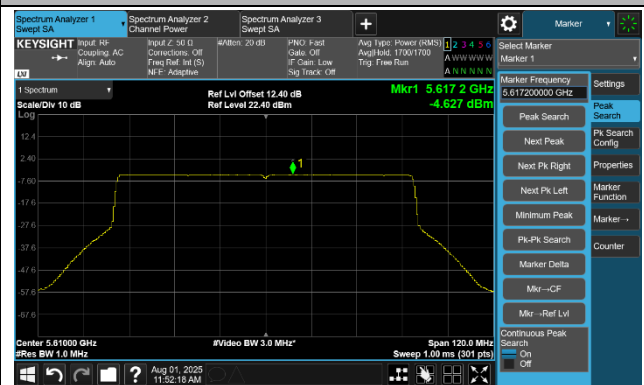


Channel 138 (5690 MHz)

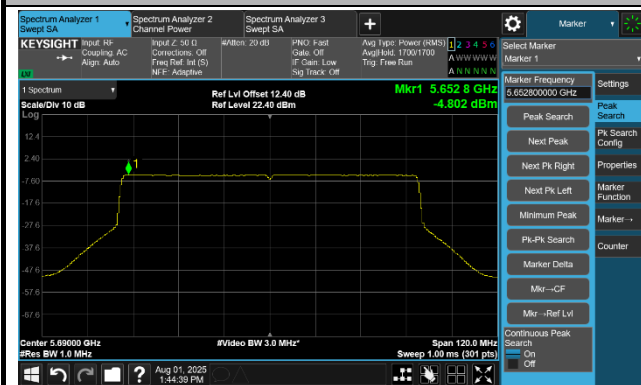

Channel 155 (5775 MHz)



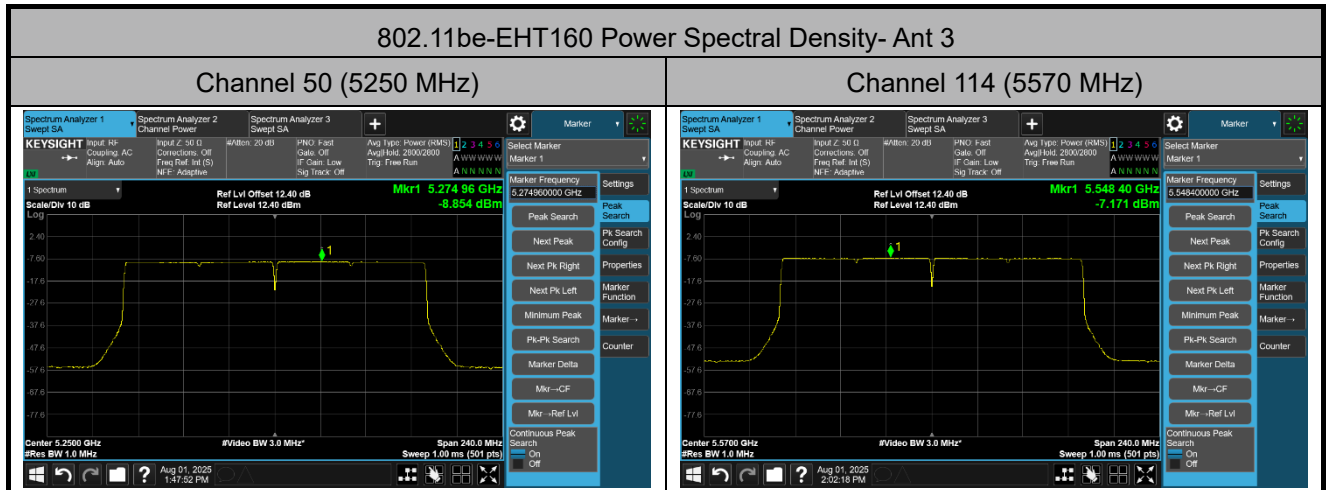

A.6 Frequency Stability Test Result

Tri-band mode

Test Site	WZ-TR3	Test Engineer	Molly Wu
Test Date	2025-07-21	Test Mode	5180 MHz (Carrier Mode)

Voltage (%)	Power (VAC)	Temperature (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100%	120	- 30	7.26	7.20	7.11	7.01
		- 20	9.98	9.97	9.96	9.93
		- 10	10.13	10.14	10.16	10.17
		0	7.96	8.04	8.71	8.75
		+ 10	6.78	6.80	6.84	6.89
		+ 20	2.64	2.77	2.88	3.06
		+ 30	1.49	1.52	1.57	1.63
		+ 40	1.52	1.48	1.46	1.46
		+ 50	2.44	2.27	2.16	1.95
115%	138	+ 20	3.37	3.36	3.35	3.34
85%	102	+ 20	3.45	3.42	3.40	3.39

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} × 10⁶.

A.7 Radiated Spurious Emission Test Result

Tri-band mode

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11a - Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10169.80	41.45	6.41	47.86	68.20	-20.34	Peak	Horizontal
	11091.20	40.43	5.52	45.95	74.00	-28.05	Peak	Horizontal
	12230.20	41.67	4.97	46.64	74.00	-27.36	Peak	Horizontal
*	15310.60	46.54	5.85	52.39	68.20	-15.81	Peak	Horizontal
*	8833.60	40.79	6.85	47.64	68.20	-20.56	Peak	Vertical
	11018.10	39.79	5.33	45.12	74.00	-28.88	Peak	Vertical
	12106.10	40.64	5.14	45.78	74.00	-28.22	Peak	Vertical
*	14266.80	45.85	5.73	51.58	68.20	-16.62	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11a - Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10452.00	41.99	5.99	47.98	68.20	-20.22	Peak	Horizontal
	10943.30	39.57	5.47	45.04	74.00	-28.96	Peak	Horizontal
	12230.20	41.25	4.97	46.22	74.00	-27.78	Peak	Horizontal
*	14355.20	46.05	5.71	51.76	68.20	-16.44	Peak	Horizontal
*	10246.30	41.33	6.51	47.84	68.20	-20.36	Peak	Vertical
	11548.50	39.97	5.29	45.26	74.00	-28.74	Peak	Vertical
*	14730.90	45.62	5.81	51.43	68.20	-16.77	Peak	Vertical
	16005.90	33.28	6.44	39.72	54.00	-14.28	Average	Vertical
	16005.90	45.77	6.44	52.21	74.00	-21.79	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11a - Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10152.80	41.19	6.33	47.52	68.20	-20.68	Peak	Horizontal
	11356.40	40.27	5.62	45.89	74.00	-28.11	Peak	Horizontal
	12187.70	41.42	4.88	46.30	74.00	-27.70	Peak	Horizontal
*	14132.5	45.94	5.54	51.48	68.20	-16.72	Peak	Horizontal
*	9836.60	41.09	6.64	47.73	68.20	-20.47	Peak	Vertical
	11205.10	38.91	5.43	44.34	74.00	-29.66	Peak	Vertical
	12024.50	39.91	5.18	45.09	74.00	-28.91	Peak	Vertical
*	15213.7	45.75	5.85	51.59	68.20	-16.61	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11a - Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10137.50	40.95	6.40	47.35	68.20	-20.85	Peak	Horizontal
	10943.30	40.33	5.47	45.80	74.00	-28.20	Peak	Horizontal
	12065.30	41.34	5.19	46.53	74.00	-27.47	Peak	Horizontal
*	12820.10	44.98	5.50	50.48	68.20	-17.72	Peak	Horizontal
*	10122.20	41.63	6.08	47.71	68.20	-20.49	Peak	Vertical
	11319.00	39.01	5.74	44.75	74.00	-29.25	Peak	Vertical
	12106.10	41.01	5.14	46.15	74.00	-27.85	Peak	Vertical
*	15181.40	46.56	5.98	52.54	68.20	-15.66	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11a - Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9812.80	40.63	6.95	47.58	68.20	-20.62	Peak	Horizontal
	11511.10	40.36	5.61	45.97	74.00	-28.03	Peak	Horizontal
	12230.20	41.87	4.97	46.84	74.00	-27.16	Peak	Horizontal
*	14924.70	46.73	5.72	52.45	68.20	-15.75	Peak	Horizontal
*	10045.70	40.96	6.40	47.36	68.20	-20.84	Peak	Vertical
	11242.50	39.71	5.78	45.49	74.00	-28.51	Peak	Vertical
	12230.20	41.72	4.97	46.69	74.00	-27.31	Peak	Vertical
*	14589.80	46.08	5.75	51.83	68.20	-16.37	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11a - Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10484.30	41.46	6.14	47.60	68.20	-20.60	Peak	Horizontal
	11472.00	39.57	5.47	45.04	74.00	-28.96	Peak	Horizontal
	12311.80	40.93	4.84	45.77	74.00	-28.23	Peak	Horizontal
*	14916.20	46.29	5.62	51.91	68.20	-16.29	Peak	Horizontal
*	10242.90	40.79	6.61	47.40	68.20	-20.80	Peak	Vertical
	11395.50	40.17	5.52	45.69	74.00	-28.31	Peak	Vertical
	12478.40	41.21	4.89	46.10	74.00	-27.90	Peak	Vertical
*	14610.20	45.71	5.74	51.45	68.20	-16.75	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11a - Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9279.00	40.59	7.07	47.66	68.20	-20.54	Peak	Horizontal
	11018.10	39.42	5.33	44.75	74.00	-29.25	Peak	Horizontal
	11745.70	41.05	5.10	46.15	74.00	-27.85	Peak	Horizontal
*	15298.70	45.85	5.97	51.82	68.20	-16.38	Peak	Horizontal
*	10214.00	41.59	6.55	48.14	68.20	-20.06	Peak	Vertical
	11356.40	39.96	5.62	45.58	74.00	-28.42	Peak	Vertical
	12065.30	40.17	5.19	45.36	74.00	-28.64	Peak	Vertical
*	15269.80	45.35	6.04	51.39	68.20	-16.81	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11a - Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10514.90	41.69	5.92	47.61	68.20	-20.59	Peak	Horizontal
	11472.00	40.11	5.47	45.58	74.00	-28.42	Peak	Horizontal
	12271.00	41.68	4.90	46.58	74.00	-27.42	Peak	Horizontal
*	14887.30	46.24	5.70	51.94	68.20	-16.26	Peak	Horizontal
*	10183.40	40.82	6.54	47.36	68.20	-20.84	Peak	Vertical
	11706.60	40.76	5.36	46.12	74.00	-27.88	Peak	Vertical
*	13544.30	46.18	4.85	51.03	68.20	-17.17	Peak	Vertical
	15378.60	33.37	5.96	39.33	54.00	-14.67	Average	Vertical
	15378.60	46.49	5.96	52.45	74.00	-21.55	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11a - Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10202.10	41.22	6.67	47.89	68.20	-20.31	Peak	Horizontal
	11319.00	40.09	5.74	45.83	74.00	-28.17	Peak	Horizontal
	12520.90	41.87	5.06	46.93	74.00	-27.07	Peak	Horizontal
*	14926.40	45.56	5.73	51.29	68.20	-16.91	Peak	Horizontal
*	9790.70	41.14	6.45	47.59	68.20	-20.61	Peak	Vertical
	11432.90	40.64	5.54	46.18	74.00	-27.82	Peak	Vertical
	12437.60	41.76	4.79	46.55	74.00	-27.45	Peak	Vertical
*	14800.60	46.19	5.70	51.89	68.20	-16.31	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11a - Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9926.70	40.76	6.41	47.17	68.20	-21.03	Peak	Horizontal
	11356.40	39.40	5.62	45.02	74.00	-28.98	Peak	Horizontal
	12354.30	41.39	4.91	46.30	74.00	-27.70	Peak	Horizontal
*	14754.70	45.60	5.83	51.43	68.20	-16.77	Peak	Horizontal
*	9702.30	40.86	6.61	47.47	68.20	-20.73	Peak	Vertical
	11548.50	41.23	5.29	46.52	74.00	-27.48	Peak	Vertical
	12187.70	41.43	4.88	46.31	74.00	-27.69	Peak	Vertical
*	14928.10	46.01	5.76	51.77	68.20	-16.43	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11a - Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11055.50	39.07	5.52	44.59	74.00	-29.41	Peak	Horizontal
	11985.40	40.49	5.16	45.65	74.00	-28.35	Peak	Horizontal
*	15089.60	45.78	5.97	51.75	68.20	-16.45	Peak	Horizontal
*	16318.70	46.64	5.52	52.16	68.20	-16.04	Peak	Horizontal
*	8763.90	39.96	6.74	46.70	68.20	-21.50	Peak	Vertical
	10980.70	39.20	5.21	44.41	74.00	-29.59	Peak	Vertical
	11706.60	40.69	5.36	46.05	74.00	-27.95	Peak	Vertical
*	13778.90	45.91	4.94	50.85	68.20	-17.35	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11a - Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10480.90	41.21	6.22	47.43	68.20	-20.77	Peak	Horizontal
	11570.60	37.61	5.20	42.81	54.00	-11.19	Average	Horizontal
	11570.60	45.31	5.20	50.51	74.00	-23.49	Peak	Horizontal
	12605.90	41.32	5.48	46.80	74.00	-27.20	Peak	Horizontal
*	15268.10	45.99	6.01	52.00	68.20	-16.20	Peak	Horizontal
*	10501.30	41.44	5.81	47.25	68.20	-20.95	Peak	Vertical
	11577.40	37.66	5.18	42.84	54.00	-11.16	Average	Vertical
	11577.40	45.10	5.18	50.28	74.00	-23.72	Peak	Vertical
	12230.20	40.55	4.97	45.52	74.00	-28.48	Peak	Vertical
*	14844.80	45.83	5.80	51.63	68.20	-16.57	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11a - Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	8854.00	40.09	6.76	46.85	68.20	-21.35	Peak	Horizontal
	11055.50	39.68	5.52	45.20	74.00	-28.80	Peak	Horizontal
	11647.10	39.31	5.28	44.59	54.00	-9.41	Average	Horizontal
	11647.10	46.69	5.28	51.97	74.00	-22.03	Peak	Horizontal
*	13194.10	45.25	5.40	50.65	68.20	-17.55	Peak	Horizontal
*	10181.70	40.31	6.52	46.83	68.20	-21.37	Peak	Vertical
	11647.10	39.01	5.28	44.29	54.00	-9.71	Average	Vertical
	11647.10	46.30	5.28	51.58	74.00	-22.42	Peak	Vertical
	12271.00	42.23	4.90	47.13	74.00	-26.87	Peak	Vertical
*	14637.4	45.13	5.97	51.1	68.20	-17.10	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT20 - Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9986.20	40.58	6.71	47.29	68.20	-20.91	Peak	Horizontal
	11055.50	39.35	5.52	44.87	74.00	-29.13	Peak	Horizontal
	11864.70	39.65	5.20	44.85	74.00	-29.15	Peak	Horizontal
*	14593.20	45.15	5.75	50.90	68.20	-17.30	Peak	Horizontal
	11205.10	38.97	5.43	44.40	74.00	-29.60	Peak	Vertical
	12146.90	40.96	5.05	46.01	74.00	-27.99	Peak	Vertical
*	14642.50	47.43	6.03	53.46	68.20	-14.74	Peak	Vertical
*	16730.10	47.63	4.37	52.00	68.20	-16.20	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT20 - Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11356.40	40.08	5.62	45.70	74.00	-28.30	Peak	Horizontal
	11944.60	40.21	4.99	45.20	74.00	-28.80	Peak	Horizontal
*	12854.10	45.07	5.50	50.57	68.20	-17.63	Peak	Horizontal
*	14596.60	46.01	5.75	51.76	68.20	-16.44	Peak	Horizontal
*	10183.40	41.17	6.54	47.71	68.20	-20.49	Peak	Vertical
	11279.90	39.49	5.65	45.14	74.00	-28.86	Peak	Vertical
	11784.80	40.32	4.99	45.31	74.00	-28.69	Peak	Vertical
*	15341.20	45.52	5.86	51.38	68.20	-16.82	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT20 - Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9709.10	40.78	6.65	47.43	68.20	-20.77	Peak	Horizontal
	11242.50	39.06	5.78	44.84	74.00	-29.16	Peak	Horizontal
	11903.80	40.02	5.27	45.29	74.00	-28.71	Peak	Horizontal
*	17267.30	48.76	2.97	51.73	68.20	-16.47	Peak	Horizontal
	11356.40	39.55	5.62	45.17	74.00	-28.83	Peak	Vertical
	12187.70	41.58	4.88	46.46	74.00	-27.54	Peak	Vertical
*	13483.10	45.94	4.95	50.89	68.20	-17.31	Peak	Vertical
*	15070.90	46.02	5.74	51.76	68.20	-16.44	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT20 - Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10205.50	40.78	6.69	47.47	68.20	-20.73	Peak	Horizontal
	11091.20	39.84	5.52	45.36	74.00	-28.64	Peak	Horizontal
	12563.40	41.42	5.08	46.50	74.00	-27.50	Peak	Horizontal
*	14644.20	46.13	6.01	52.14	68.20	-16.06	Peak	Horizontal
*	9290.90	41.59	7.09	48.68	68.20	-19.52	Peak	Vertical
	11548.50	39.40	5.29	44.69	74.00	-29.31	Peak	Vertical
	12187.70	41.10	4.88	45.98	74.00	-28.02	Peak	Vertical
*	15087.90	45.08	5.97	51.05	68.20	-17.15	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT20 - Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9646.20	40.80	6.77	47.57	68.20	-20.63	Peak	Horizontal
	11242.50	39.78	5.78	45.56	74.00	-28.44	Peak	Horizontal
	11944.60	41.13	4.99	46.12	74.00	-27.88	Peak	Horizontal
*	12762.30	45.12	5.47	50.59	68.20	-17.61	Peak	Horizontal
*	9913.10	40.71	6.49	47.20	68.20	-21.00	Peak	Vertical
	11128.60	39.20	5.62	44.82	74.00	-29.18	Peak	Vertical
	12065.30	40.23	5.19	45.42	74.00	-28.58	Peak	Vertical
*	14302.50	46.28	5.75	52.03	68.20	-16.17	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT20 - Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10236.10	41.85	6.44	48.29	68.20	-19.91	Peak	Horizontal
	11205.10	39.91	5.43	45.34	74.00	-28.66	Peak	Horizontal
	12024.50	41.01	5.18	46.19	74.00	-27.81	Peak	Horizontal
*	16716.50	47.79	4.40	52.19	68.20	-16.01	Peak	Horizontal
*	9712.50	40.86	6.67	47.53	68.20	-20.67	Peak	Vertical
	11167.70	39.75	5.61	45.36	74.00	-28.64	Peak	Vertical
	12146.90	40.93	5.05	45.98	74.00	-28.02	Peak	Vertical
*	15271.5	45.55	6.07	51.62	68.20	-16.58	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT20 - Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9984.50	41.71	6.70	48.41	68.20	-19.79	Peak	Horizontal
	11319.00	40.48	5.74	46.22	74.00	-27.78	Peak	Horizontal
	12024.50	40.73	5.18	45.91	74.00	-28.09	Peak	Horizontal
*	14557.50	45.53	6.02	51.55	68.20	-16.65	Peak	Horizontal
*	8988.30	41.10	7.17	48.27	68.20	-19.93	Peak	Vertical
	11167.70	39.76	5.61	45.37	74.00	-28.63	Peak	Vertical
	11823.90	40.50	4.92	45.42	74.00	-28.58	Peak	Vertical
*	17236.70	49.37	2.98	52.35	68.20	-15.85	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT20 - Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10372.10	41.99	6.32	48.31	68.20	-19.89	Peak	Horizontal
	10943.30	40.14	5.47	45.61	74.00	-28.39	Peak	Horizontal
	11665.80	40.73	5.15	45.88	74.00	-28.12	Peak	Horizontal
*	15045.40	45.90	5.79	51.69	68.20	-16.51	Peak	Horizontal
*	9812.80	42.21	6.95	49.16	68.20	-19.04	Peak	Vertical
	10943.30	40.38	5.47	45.85	74.00	-28.15	Peak	Vertical
	11985.40	41.42	5.16	46.58	74.00	-27.42	Peak	Vertical
*	15286.80	45.99	6.04	52.03	68.20	-16.17	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT20 - Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10401.00	41.92	6.15	48.07	68.20	-20.13	Peak	Horizontal
	11548.50	40.28	5.29	45.57	74.00	-28.43	Peak	Horizontal
	12311.80	41.35	4.84	46.19	74.00	-27.81	Peak	Horizontal
*	14628.90	46.14	5.81	51.95	68.20	-16.25	Peak	Horizontal
*	8772.40	40.66	6.74	47.40	68.20	-20.80	Peak	Vertical
	11055.50	39.12	5.52	44.64	74.00	-29.36	Peak	Vertical
	11985.40	40.97	5.16	46.13	74.00	-27.87	Peak	Vertical
*	15115.10	45.92	5.84	51.76	68.20	-16.44	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT20 - Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9967.50	41.24	6.45	47.69	68.20	-20.51	Peak	Horizontal
	11128.60	39.45	5.62	45.07	74.00	-28.93	Peak	Horizontal
	12146.90	41.89	5.05	46.94	74.00	-27.06	Peak	Horizontal
*	14411.30	46.18	5.68	51.86	68.20	-16.34	Peak	Horizontal
*	9981.10	40.51	6.65	47.16	68.20	-21.04	Peak	Vertical
	10980.70	39.88	5.21	45.09	74.00	-28.91	Peak	Vertical
	11784.80	39.84	4.99	44.83	74.00	-29.17	Peak	Vertical
*	15285.10	45.66	6.05	51.71	68.20	-16.49	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT20 - Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10317.70	41.51	6.18	47.69	68.20	-20.51	Peak	Horizontal
	11319.00	39.73	5.74	45.47	74.00	-28.53	Peak	Horizontal
	12354.30	42.08	4.91	46.99	74.00	-27.01	Peak	Horizontal
*	14974.00	45.91	5.73	51.64	68.20	-16.56	Peak	Horizontal
	11055.50	39.67	5.52	45.19	74.00	-28.81	Peak	Vertical
	11587.60	40.49	5.21	45.70	74.00	-28.30	Peak	Vertical
*	12837.10	45.21	5.43	50.64	68.20	-17.56	Peak	Vertical
*	15191.60	45.68	5.90	51.58	68.20	-16.62	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT20 - Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10326.20	41.46	6.19	47.65	68.20	-20.55	Peak	Horizontal
	11580.80	35.75	5.19	40.94	54.00	-13.06	Average	Horizontal
	11580.80	43.72	5.19	48.91	74.00	-25.09	Peak	Horizontal
	12395.10	40.75	4.84	45.59	74.00	-28.41	Peak	Horizontal
*	14549.00	45.61	5.99	51.60	68.20	-16.60	Peak	Horizontal
*	9857.00	40.91	6.52	47.43	68.20	-20.77	Peak	Vertical
	11574.00	37.85	5.18	43.03	54.00	-10.97	Average	Vertical
	11574.00	43.79	5.18	48.97	74.00	-25.03	Peak	Vertical
	12271.00	40.55	4.90	45.45	74.00	-28.55	Peak	Vertical
*	15237.50	46.80	5.82	52.62	68.20	-15.58	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT20 - Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9831.50	41.12	6.73	47.85	68.20	-20.35	Peak	Horizontal
	11128.60	39.54	5.62	45.16	74.00	-28.84	Peak	Horizontal
	11650.50	37.26	5.24	42.50	54.00	-11.50	Average	Horizontal
	11650.50	48.01	5.24	53.25	74.00	-20.75	Peak	Horizontal
*	14739.40	44.92	5.96	50.88	68.20	-17.32	Peak	Horizontal
*	9712.50	41.00	6.67	47.67	68.20	-20.53	Peak	Vertical
	10980.70	40.01	5.21	45.22	74.00	-28.78	Peak	Vertical
	11647.10	37.93	5.28	43.21	54.00	-10.79	Average	Vertical
	11647.10	47.91	5.28	53.19	74.00	-20.81	Peak	Vertical
*	15161.00	45.67	5.84	51.51	68.20	-16.69	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT40 - Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10018.50	40.81	6.28	47.09	68.20	-21.11	Peak	Horizontal
	10980.70	40.62	5.21	45.83	74.00	-28.17	Peak	Horizontal
	11784.80	41.27	4.99	46.26	74.00	-27.74	Peak	Horizontal
*	14552.40	45.40	6.02	51.42	68.20	-16.78	Peak	Horizontal
*	10180.00	40.83	6.49	47.32	68.20	-20.88	Peak	Vertical
	10943.30	39.57	5.47	45.04	74.00	-28.96	Peak	Vertical
	12024.50	40.21	5.18	45.39	74.00	-28.61	Peak	Vertical
*	14685.00	47.15	5.67	52.82	68.20	-15.38	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT40 - Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9809.40	40.95	6.85	47.80	68.20	-20.40	Peak	Horizontal
	11091.20	40.08	5.52	45.60	74.00	-28.40	Peak	Horizontal
	11944.60	40.54	4.99	45.53	74.00	-28.47	Peak	Horizontal
*	14919.60	46.15	5.66	51.81	68.20	-16.39	Peak	Horizontal
*	10202.10	41.52	6.67	48.19	68.20	-20.01	Peak	Vertical
	11128.60	39.87	5.62	45.49	74.00	-28.51	Peak	Vertical
	11864.70	40.54	5.20	45.74	74.00	-28.26	Peak	Vertical
*	14426.60	45.85	5.89	51.74	68.20	-16.46	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT40 - Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10163.00	38.22	6.39	44.61	68.20	-23.59	Peak	Horizontal
	10870.20	39.74	5.62	45.36	74.00	-28.64	Peak	Horizontal
	12024.50	40.96	5.18	46.14	74.00	-27.86	Peak	Horizontal
*	13945.50	42.68	5.26	47.94	68.20	-20.26	Peak	Horizontal
*	10061.00	37.52	6.45	43.97	68.20	-24.23	Peak	Vertical
	11395.50	39.56	5.52	45.08	74.00	-28.92	Peak	Vertical
	12271.00	42.92	4.90	47.82	74.00	-26.18	Peak	Vertical
*	13852.00	41.94	4.95	46.89	68.20	-21.31	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT40 - Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10212.30	41.15	6.59	47.74	68.20	-20.46	Peak	Horizontal
	11511.10	40.08	5.61	45.69	74.00	-28.31	Peak	Horizontal
	12187.70	41.67	4.88	46.55	74.00	-27.45	Peak	Horizontal
*	14222.60	44.41	5.55	49.96	68.20	-18.24	Peak	Horizontal
*	10231.00	38.33	6.32	44.65	68.20	-23.55	Peak	Vertical
	10834.50	38.87	5.60	44.47	74.00	-29.53	Peak	Vertical
	11341.10	41.87	5.63	47.50	74.00	-26.50	Peak	Vertical
*	14229.40	42.29	5.58	47.87	68.20	-20.33	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT40 - Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10129.00	39.41	6.23	45.64	68.20	-22.56	Peak	Horizontal
	11356.40	41.16	5.62	46.78	74.00	-27.22	Peak	Horizontal
	12187.70	42.45	4.88	47.33	74.00	-26.67	Peak	Horizontal
*	14181.80	42.36	5.62	47.98	68.20	-20.22	Peak	Horizontal
*	10370.40	38.05	6.34	44.39	68.20	-23.81	Peak	Vertical
	11742.30	35.42	5.14	40.56	54.00	-13.44	Average	Vertical
	11742.30	43.97	5.14	49.11	74.00	-24.89	Peak	Vertical
	12230.20	40.48	4.97	45.45	74.00	-28.55	Peak	Vertical
*	13852.00	42.01	4.95	46.96	68.20	-21.24	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT40 - Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	10980.70	39.68	5.21	44.89	74.00	-29.11	Peak	Horizontal
	11706.60	40.98	5.36	46.34	74.00	-27.66	Peak	Horizontal
*	13967.60	44.95	5.50	50.45	68.20	-17.75	Peak	Horizontal
*	15040.30	44.65	5.77	50.42	68.20	-17.78	Peak	Horizontal
	11242.50	38.87	5.78	44.65	74.00	-29.35	Peak	Vertical
	12354.30	41.40	4.91	46.31	74.00	-27.69	Peak	Vertical
*	13991.40	42.52	5.66	48.18	68.20	-20.02	Peak	Vertical
*	15118.50	42.33	5.82	48.15	68.20	-20.05	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT40 - Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9993.00	39.02	6.64	45.66	68.20	-22.54	Peak	Horizontal
	11511.10	42.83	5.61	48.44	74.00	-25.56	Peak	Horizontal
	12145.20	44.15	5.05	49.20	74.00	-24.80	Peak	Horizontal
*	14086.60	44.31	5.64	49.95	68.20	-18.25	Peak	Horizontal
	11548.50	40.35	5.29	45.64	74.00	-28.36	Peak	Vertical
	12437.60	42.05	4.79	46.84	74.00	-27.16	Peak	Vertical
*	13804.40	42.09	4.95	47.04	68.20	-21.16	Peak	Vertical
*	15169.50	43.47	5.96	49.43	68.20	-18.77	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT40 - Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10163.00	38.02	6.39	44.41	68.20	-23.79	Peak	Horizontal
	11273.10	42.06	5.54	47.60	74.00	-26.40	Peak	Horizontal
	12271.00	41.48	4.90	46.38	74.00	-27.62	Peak	Horizontal
*	13991.40	42.69	5.66	48.35	68.20	-19.85	Peak	Horizontal
*	10061.00	39.80	6.45	46.25	68.20	-21.95	Peak	Vertical
	11091.20	39.24	5.52	44.76	74.00	-29.24	Peak	Vertical
	12187.70	41.70	4.88	46.58	74.00	-27.42	Peak	Vertical
*	13991.40	43.23	5.66	48.89	68.20	-19.31	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT40 - Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9826.40	38.44	6.83	45.27	68.20	-22.93	Peak	Horizontal
	11055.50	42.07	5.52	47.59	74.00	-26.41	Peak	Horizontal
	12024.50	40.83	5.18	46.01	74.00	-27.99	Peak	Horizontal
*	13897.90	43.19	5.09	48.28	68.20	-19.92	Peak	Horizontal
*	10061.00	38.13	6.45	44.58	68.20	-23.62	Peak	Vertical
	11903.80	40.52	5.27	45.79	74.00	-28.21	Peak	Vertical
	12478.40	42.54	4.89	47.43	74.00	-26.57	Peak	Vertical
*	14229.40	43.14	5.58	48.72	68.20	-19.48	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT40 - Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11548.50	42.06	5.29	47.35	74.00	-26.65	Peak	Horizontal
	12187.70	41.82	4.88	46.70	74.00	-27.30	Peak	Horizontal
*	12903.40	45.61	5.32	50.93	68.20	-17.27	Peak	Horizontal
*	14270.20	45.72	5.72	51.44	68.20	-16.76	Peak	Horizontal
*	10197.00	38.65	6.67	45.32	68.20	-22.88	Peak	Vertical
	11091.20	39.60	5.52	45.12	74.00	-28.88	Peak	Vertical
	12024.50	42.07	5.18	47.25	74.00	-26.75	Peak	Vertical
*	13804.40	41.79	4.95	46.74	68.20	-21.46	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT80 - Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9993.00	39.80	6.64	46.44	68.20	-21.76	Peak	Horizontal
	11242.50	39.65	5.78	45.43	74.00	-28.57	Peak	Horizontal
	12354.30	41.80	4.91	46.71	74.00	-27.29	Peak	Horizontal
*	14134.20	43.81	5.55	49.36	68.20	-18.84	Peak	Horizontal
	11395.50	39.70	5.52	45.22	74.00	-28.78	Peak	Vertical
	12106.10	42.40	5.14	47.54	74.00	-26.46	Peak	Vertical
*	13986.30	47.03	5.65	52.68	68.20	-15.52	Peak	Vertical
*	15169.50	42.99	5.96	48.95	68.20	-19.25	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT80 - Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10095.00	39.64	6.34	45.98	68.20	-22.22	Peak	Horizontal
	11279.90	40.13	5.65	45.78	74.00	-28.22	Peak	Horizontal
	12187.70	42.05	4.88	46.93	74.00	-27.07	Peak	Horizontal
*	13945.50	42.72	5.26	47.98	68.20	-20.22	Peak	Horizontal
*	9993.00	37.98	6.64	44.62	68.20	-23.58	Peak	Vertical
	11205.10	39.44	5.43	44.87	74.00	-29.13	Peak	Vertical
	12187.70	42.48	4.88	47.36	74.00	-26.64	Peak	Vertical
*	13804.40	43.61	4.95	48.56	68.20	-19.64	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT80 - Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9993.00	38.80	6.64	45.44	68.20	-22.76	Peak	Horizontal
	11356.40	39.90	5.62	45.52	74.00	-28.48	Peak	Horizontal
	12187.70	41.26	4.88	46.14	74.00	-27.86	Peak	Horizontal
*	14039.00	43.30	5.32	48.62	68.20	-19.58	Peak	Horizontal
*	10123.90	41.76	6.09	47.85	68.20	-20.35	Peak	Vertical
	11587.60	40.21	5.21	45.42	74.00	-28.58	Peak	Vertical
	12230.20	41.99	4.97	46.96	74.00	-27.04	Peak	Vertical
*	14086.60	42.40	5.64	48.04	68.20	-20.16	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT80 - Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9811.10	40.77	6.90	47.67	68.20	-20.53	Peak	Horizontal
	11779.70	35.26	4.99	40.25	54.00	-13.75	Average	Horizontal
	11779.70	44.24	4.99	49.23	74.00	-24.77	Peak	Horizontal
	12354.30	42.07	4.91	46.98	74.00	-27.02	Peak	Horizontal
*	13884.30	44.90	5.10	50.00	68.20	-18.20	Peak	Horizontal
*	10061.00	37.92	6.45	44.37	68.20	-23.83	Peak	Vertical
	11205.10	39.86	5.43	45.29	74.00	-28.71	Peak	Vertical
	12106.10	42.37	5.14	47.51	74.00	-26.49	Peak	Vertical
*	13945.50	42.67	5.26	47.93	68.20	-20.27	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT80 - Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9826.40	37.87	6.83	44.70	68.20	-23.50	Peak	Horizontal
	11319.00	40.58	5.74	46.32	74.00	-27.68	Peak	Horizontal
	11864.70	40.12	5.20	45.32	74.00	-28.68	Peak	Horizontal
*	14181.80	42.41	5.62	48.03	68.20	-20.17	Peak	Horizontal
*	10027.00	36.21	6.26	42.47	68.20	-25.73	Peak	Vertical
	11432.90	40.03	5.54	45.57	74.00	-28.43	Peak	Vertical
	12648.40	40.68	5.44	46.12	74.00	-27.88	Peak	Vertical
*	15278.30	46.11	6.06	52.17	68.20	-16.03	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT80 - Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10334.70	38.31	6.16	44.47	68.20	-23.73	Peak	Horizontal
	11319.00	39.70	5.74	45.44	74.00	-28.56	Peak	Horizontal
	12024.50	40.97	5.18	46.15	74.00	-27.85	Peak	Horizontal
*	14229.40	43.69	5.58	49.27	68.20	-18.93	Peak	Horizontal
*	10163.00	36.91	6.39	43.30	68.20	-24.90	Peak	Vertical
	11626.70	39.92	5.22	45.14	74.00	-28.86	Peak	Vertical
	12065.30	41.52	5.19	46.71	74.00	-27.29	Peak	Vertical
*	13852.00	43.06	4.95	48.01	68.20	-20.19	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-07-31	Test Mode	802.11ac-VHT160 - Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9982.80	40.51	6.68	47.19	68.20	-21.01	Peak	Horizontal
	11397.20	42.02	5.51	47.53	74.00	-26.47	Peak	Horizontal
	12179.20	43.91	4.96	48.87	74.00	-25.13	Peak	Horizontal
*	15169.50	45.17	5.96	51.13	68.20	-17.07	Peak	Horizontal
*	10176.60	41.89	6.45	48.34	68.20	-19.86	Peak	Vertical
	11065.70	42.75	5.54	48.29	74.00	-25.71	Peak	Vertical
	12486.90	45.11	4.91	50.02	74.00	-23.98	Peak	Vertical
*	13809.50	46.04	4.94	50.98	68.20	-17.22	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11ac-VHT160-Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9982.80	40.99	6.68	47.67	68.20	-20.53	Peak	Horizontal
	11033.40	41.95	5.54	47.49	74.00	-26.51	Peak	Horizontal
	12118.00	43.19	5.09	48.28	74.00	-25.72	Peak	Horizontal
*	13875.80	46.12	5.08	51.20	68.20	-17.00	Peak	Horizontal
*	9814.50	40.97	6.99	47.96	68.20	-20.24	Peak	Vertical
	11254.40	42.44	5.69	48.13	74.00	-25.87	Peak	Vertical
	12095.90	43.68	5.15	48.83	74.00	-25.17	Peak	Vertical
*	13984.60	44.57	5.65	50.22	68.20	-17.98	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11ax-HE20 - Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9817.90	41.64	7.00	48.64	68.20	-19.56	Peak	Horizontal
	11254.40	42.69	5.69	48.38	74.00	-25.62	Peak	Horizontal
	12118.00	44.20	5.09	49.29	74.00	-24.71	Peak	Horizontal
*	14158.00	45.89	5.62	51.51	68.20	-16.69	Peak	Horizontal
*	9986.20	42.45	6.71	49.16	68.20	-19.04	Peak	Vertical
	11087.80	42.43	5.51	47.94	74.00	-26.06	Peak	Vertical
	11997.30	44.04	5.23	49.27	74.00	-24.73	Peak	Vertical
*	13913.20	46.10	5.11	51.21	68.20	-16.99	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11ax-HE20 - Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10236.10	41.90	6.44	48.34	68.20	-19.86	Peak	Horizontal
	11426.10	42.93	5.61	48.54	74.00	-25.46	Peak	Horizontal
	12252.30	44.48	4.95	49.43	74.00	-24.57	Peak	Horizontal
*	14183.50	45.93	5.63	51.56	68.20	-16.64	Peak	Horizontal
*	10147.70	41.52	6.35	47.87	68.20	-20.33	Peak	Vertical
	11123.50	42.70	5.62	48.32	74.00	-25.68	Peak	Vertical
	12233.60	44.04	5.01	49.05	74.00	-24.95	Peak	Vertical
*	14083.20	45.75	5.60	51.35	68.20	-16.85	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11ax-HE20 - Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9967.50	41.60	6.45	48.05	68.20	-20.15	Peak	Horizontal
	11398.90	43.18	5.50	48.68	74.00	-25.32	Peak	Horizontal
	12114.60	44.90	5.11	50.01	74.00	-23.99	Peak	Horizontal
*	14120.60	44.89	5.61	50.50	68.20	-17.70	Peak	Horizontal
*	10402.70	43.10	6.15	49.25	68.20	-18.95	Peak	Vertical
	11504.30	43.65	5.70	49.35	74.00	-24.65	Peak	Vertical
	11859.60	44.19	5.21	49.40	74.00	-24.60	Peak	Vertical
*	14348.40	45.22	5.67	50.89	68.20	-17.31	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)