

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11ax-HE20 - Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9758.40	41.41	6.60	48.01	68.20	-20.19	Peak	Horizontal
	11276.50	42.73	5.59	48.32	74.00	-25.68	Peak	Horizontal
	12316.90	44.29	4.86	49.15	74.00	-24.85	Peak	Horizontal
*	14081.50	45.55	5.59	51.14	68.20	-17.06	Peak	Horizontal
*	10176.60	42.78	6.45	49.23	68.20	-18.97	Peak	Vertical
	11376.80	42.82	5.60	48.42	74.00	-25.58	Peak	Vertical
	12527.70	44.95	5.10	50.05	74.00	-23.95	Peak	Vertical
*	14273.60	45.68	5.70	51.38	68.20	-16.82	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11ax-HE20 - Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10076.30	41.24	6.39	47.63	68.20	-20.57	Peak	Horizontal
	11262.90	42.91	5.48	48.39	74.00	-25.61	Peak	Horizontal
	12090.80	44.10	5.14	49.24	74.00	-24.76	Peak	Horizontal
*	14113.80	45.48	5.70	51.18	68.20	-17.02	Peak	Horizontal
*	9923.30	41.37	6.45	47.82	68.20	-20.38	Peak	Vertical
	10810.70	42.48	5.56	48.04	74.00	-25.96	Peak	Vertical
	12231.90	45.64	4.99	50.63	74.00	-23.37	Peak	Vertical
*	13916.60	46.46	5.09	51.55	68.20	-16.65	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11ax-HE20 - Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10401.00	42.50	6.15	48.65	68.20	-19.55	Peak	Horizontal
	11317.30	42.85	5.75	48.60	74.00	-25.40	Peak	Horizontal
	12209.80	44.13	4.86	48.99	74.00	-25.01	Peak	Horizontal
*	14096.80	45.90	5.75	51.65	68.20	-16.55	Peak	Horizontal
*	10268.40	42.48	6.21	48.69	68.20	-19.51	Peak	Vertical
	11499.20	43.29	5.60	48.89	74.00	-25.11	Peak	Vertical
	12381.50	44.61	4.76	49.37	74.00	-24.63	Peak	Vertical
*	13967.60	45.12	5.50	50.62	68.20	-17.58	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11ax-HE20 - Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10163.00	42.11	6.39	48.50	68.20	-19.70	Peak	Horizontal
	11398.90	43.57	5.50	49.07	74.00	-24.93	Peak	Horizontal
	11856.20	43.86	5.14	49.00	74.00	-25.00	Peak	Horizontal
*	14341.60	45.84	5.59	51.43	68.20	-16.77	Peak	Horizontal
*	9795.80	41.67	6.49	48.16	68.20	-20.04	Peak	Vertical
	11162.60	42.07	5.68	47.75	74.00	-26.25	Peak	Vertical
	11849.40	44.29	5.03	49.32	74.00	-24.68	Peak	Vertical
*	14307.60	45.71	5.77	51.48	68.20	-16.72	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11ax-HE20 - Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10208.90	40.89	6.68	47.57	68.20	-20.63	Peak	Horizontal
	11337.70	42.66	5.64	48.30	74.00	-25.70	Peak	Horizontal
	12070.40	44.12	5.16	49.28	74.00	-24.72	Peak	Horizontal
*	14229.40	45.45	5.58	51.03	68.20	-17.17	Peak	Horizontal
*	10149.40	41.62	6.34	47.96	68.20	-20.24	Peak	Vertical
	11424.40	42.71	5.63	48.34	74.00	-25.66	Peak	Vertical
	12449.50	44.40	4.97	49.37	74.00	-24.63	Peak	Vertical
*	14338.20	45.53	5.56	51.09	68.20	-17.11	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11ax-HE20 - Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10173.20	41.64	6.42	48.06	68.20	-20.14	Peak	Horizontal
	11251.00	43.17	5.77	48.94	74.00	-25.06	Peak	Horizontal
	12333.90	44.65	4.78	49.43	74.00	-24.57	Peak	Horizontal
*	14270.20	45.34	5.72	51.06	68.20	-17.14	Peak	Horizontal
*	10229.30	41.87	6.28	48.15	68.20	-20.05	Peak	Vertical
	11495.80	42.63	5.52	48.15	74.00	-25.85	Peak	Vertical
	12235.30	44.89	5.03	49.92	74.00	-24.08	Peak	Vertical
*	13986.30	45.62	5.65	51.27	68.20	-16.93	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11ax-HE20 - Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9811.10	41.83	6.90	48.73	68.20	-19.47	Peak	Horizontal
	11398.90	42.88	5.50	48.38	74.00	-25.62	Peak	Horizontal
	12163.90	44.82	5.04	49.86	74.00	-24.14	Peak	Horizontal
*	13913.20	45.49	5.11	50.60	68.20	-17.60	Peak	Horizontal
*	10276.90	41.73	6.31	48.04	68.20	-20.16	Peak	Vertical
	11361.50	42.77	5.62	48.39	74.00	-25.61	Peak	Vertical
	12170.70	44.89	5.02	49.91	74.00	-24.09	Peak	Vertical
*	13976.10	45.30	5.63	50.93	68.20	-17.27	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11ax-HE20 - Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10242.90	41.91	6.61	48.52	68.20	-19.68	Peak	Horizontal
	11091.20	42.63	5.52	48.15	74.00	-25.85	Peak	Horizontal
	12095.90	43.51	5.15	48.66	74.00	-25.34	Peak	Horizontal
*	14163.10	45.12	5.64	50.76	68.20	-17.44	Peak	Horizontal
*	10317.70	41.19	6.18	47.37	68.20	-20.83	Peak	Vertical
	11438.00	42.63	5.49	48.12	74.00	-25.88	Peak	Vertical
	12044.90	43.96	5.21	49.17	74.00	-24.83	Peak	Vertical
*	14222.60	45.94	5.55	51.49	68.20	-16.71	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11ax-HE20 - Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9993.00	41.57	6.64	48.21	68.20	-19.99	Peak	Horizontal
	11568.90	36.54	5.22	41.76	54.00	-12.24	Average	Horizontal
	11568.90	45.48	5.22	50.70	74.00	-23.30	Peak	Horizontal
	12413.80	44.65	4.95	49.60	74.00	-24.40	Peak	Horizontal
*	13841.80	46.85	4.93	51.78	68.20	-16.42	Peak	Horizontal
*	9821.30	41.57	6.93	48.50	68.20	-19.70	Peak	Vertical
	11570.60	38.75	5.20	43.95	54.00	-10.05	Average	Vertical
	11570.60	45.58	5.20	50.78	74.00	-23.22	Peak	Vertical
	12228.50	44.43	4.95	49.38	74.00	-24.62	Peak	Vertical
*	14033.90	45.80	5.27	51.07	68.20	-17.13	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11ax-HE20 - Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10193.60	40.85	6.68	47.53	68.20	-20.67	Peak	Horizontal
	11647.10	33.36	5.28	38.64	54.00	-15.36	Average	Horizontal
	11647.10	45.62	5.28	50.90	74.00	-23.10	Peak	Horizontal
	12282.90	44.64	5.03	49.67	74.00	-24.33	Peak	Horizontal
*	14192.00	45.47	5.69	51.16	68.20	-17.04	Peak	Horizontal
*	10227.60	41.55	6.24	47.79	68.20	-20.41	Peak	Vertical
	11655.60	40.17	5.19	45.36	54.00	-8.64	Average	Vertical
	11655.60	47.78	5.19	52.97	74.00	-21.03	Peak	Vertical
	12245.50	45.28	4.99	50.27	74.00	-23.73	Peak	Vertical
*	14146.10	45.48	5.56	51.04	68.20	-17.16	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11ax-HE40 - Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10152.80	41.54	6.33	47.87	68.20	-20.33	Peak	Horizontal
	11475.40	42.69	5.48	48.17	74.00	-25.83	Peak	Horizontal
	12264.20	44.33	4.92	49.25	74.00	-24.75	Peak	Horizontal
*	13887.70	46.23	5.09	51.32	68.20	-16.88	Peak	Horizontal
*	10011.70	41.15	6.40	47.55	68.20	-20.65	Peak	Vertical
	11213.60	42.83	5.49	48.32	74.00	-25.68	Peak	Vertical
	12036.40	43.86	5.19	49.05	74.00	-24.95	Peak	Vertical
*	14010.10	45.03	5.58	50.61	68.20	-17.59	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11ax-HE40 - Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9982.80	41.65	6.68	48.33	68.20	-19.87	Peak	Horizontal
	11082.70	43.51	5.50	49.01	74.00	-24.99	Peak	Horizontal
	12118.00	43.60	5.09	48.69	74.00	-25.31	Peak	Horizontal
*	14100.20	44.88	5.77	50.65	68.20	-17.55	Peak	Horizontal
*	10246.30	42.51	6.51	49.02	68.20	-19.18	Peak	Vertical
	11126.90	42.57	5.62	48.19	74.00	-25.81	Peak	Vertical
	11723.60	44.50	5.09	49.59	74.00	-24.41	Peak	Vertical
*	14006.70	44.64	5.60	50.24	68.20	-17.96	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ax-HE40 - Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10292.20	41.87	6.11	47.98	68.20	-20.22	Peak	Horizontal
	11132.00	40.10	5.59	45.69	74.00	-28.31	Peak	Horizontal
	11856.20	40.61	5.14	45.75	74.00	-28.25	Peak	Horizontal
*	14581.30	45.69	5.72	51.41	68.20	-16.79	Peak	Horizontal
*	10220.80	41.86	6.35	48.21	68.20	-19.99	Peak	Vertical
	11210.20	39.59	5.47	45.06	74.00	-28.94	Peak	Vertical
	12107.80	41.48	5.13	46.61	74.00	-27.39	Peak	Vertical
*	14747.90	45.55	5.95	51.50	68.20	-16.70	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ax-HE40 - Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10176.60	40.89	6.45	47.34	68.20	-20.86	Peak	Horizontal
	11171.10	38.97	5.56	44.53	74.00	-29.47	Peak	Horizontal
	12022.80	40.17	5.18	45.35	74.00	-28.65	Peak	Horizontal
*	15174.60	44.94	5.97	50.91	68.20	-17.29	Peak	Horizontal
*	10008.30	40.93	6.45	47.38	68.20	-20.82	Peak	Vertical
	11171.10	39.58	5.56	45.14	74.00	-28.86	Peak	Vertical
	11897.00	40.15	5.20	45.35	74.00	-28.65	Peak	Vertical
*	14610.20	46.05	5.74	51.79	68.20	-16.41	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ax-HE40 - Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10446.90	42.12	6.03	48.15	68.20	-20.05	Peak	Horizontal
	11329.20	39.01	5.68	44.69	74.00	-29.31	Peak	Horizontal
	11939.50	40.57	5.02	45.59	74.00	-28.41	Peak	Horizontal
*	14644.20	46.15	6.01	52.16	68.20	-16.04	Peak	Horizontal
*	10346.60	41.25	6.15	47.40	68.20	-20.80	Peak	Vertical
	11368.30	39.10	5.63	44.73	74.00	-29.27	Peak	Vertical
	12192.80	41.02	4.86	45.88	74.00	-28.12	Peak	Vertical
*	14732.60	45.53	5.84	51.37	68.20	-16.83	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ax-HE40 - Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10208.90	40.87	6.68	47.55	68.20	-20.65	Peak	Horizontal
	11329.20	39.91	5.68	45.59	74.00	-28.41	Peak	Horizontal
	12407.00	41.62	4.95	46.57	74.00	-27.43	Peak	Horizontal
*	15191.60	45.47	5.90	51.37	68.20	-16.83	Peak	Horizontal
*	10270.10	41.43	6.23	47.66	68.20	-20.54	Peak	Vertical
	11609.70	40.48	5.11	45.59	74.00	-28.41	Peak	Vertical
	12320.30	41.85	4.88	46.73	74.00	-27.27	Peak	Vertical
*	15254.50	45.53	5.81	51.34	68.20	-16.86	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ax-HE40 - Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10067.80	41.38	6.42	47.80	68.20	-20.40	Peak	Horizontal
	11290.10	39.40	5.69	45.09	74.00	-28.91	Peak	Horizontal
	12235.30	41.36	5.03	46.39	74.00	-27.61	Peak	Horizontal
*	14632.30	45.23	5.88	51.11	68.20	-17.09	Peak	Horizontal
*	10384.00	40.94	6.20	47.14	68.20	-21.06	Peak	Vertical
	11329.20	39.60	5.68	45.28	74.00	-28.72	Peak	Vertical
	12277.80	41.23	4.97	46.20	74.00	-27.80	Peak	Vertical
*	15019.90	45.32	5.89	51.21	68.20	-16.99	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ax-HE40 - Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9882.50	41.22	6.46	47.68	68.20	-20.52	Peak	Horizontal
	11368.30	39.60	5.63	45.23	74.00	-28.77	Peak	Horizontal
	12626.30	41.25	5.42	46.67	74.00	-27.33	Peak	Horizontal
*	15155.90	45.95	5.79	51.74	68.20	-16.46	Peak	Horizontal
*	10389.10	41.95	6.17	48.12	68.20	-20.08	Peak	Vertical
	11132.00	39.38	5.59	44.97	74.00	-29.03	Peak	Vertical
	12107.80	40.32	5.13	45.45	74.00	-28.55	Peak	Vertical
*	14727.50	45.45	5.74	51.19	68.20	-17.01	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ax-HE40 - Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10198.70	40.37	6.67	47.04	68.20	-21.16	Peak	Horizontal
	11448.20	39.67	5.43	45.10	74.00	-28.90	Peak	Horizontal
	12192.80	41.19	4.86	46.05	74.00	-27.95	Peak	Horizontal
*	14237.90	46.07	5.55	51.62	68.20	-16.58	Peak	Horizontal
*	9901.20	40.99	6.46	47.45	68.20	-20.75	Peak	Vertical
	11329.20	38.85	5.68	44.53	74.00	-29.47	Peak	Vertical
	12107.80	40.89	5.13	46.02	74.00	-27.98	Peak	Vertical
*	15303.80	45.45	5.93	51.38	68.20	-16.82	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ax-HE40 - Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9734.60	40.17	6.80	46.97	68.20	-21.23	Peak	Horizontal
	11132.00	38.68	5.59	44.27	74.00	-29.73	Peak	Horizontal
	12022.80	40.41	5.18	45.59	74.00	-28.41	Peak	Horizontal
*	15285.10	45.36	6.05	51.41	68.20	-16.79	Peak	Horizontal
*	9969.20	40.72	6.49	47.21	68.20	-20.99	Peak	Vertical
	11171.10	39.35	5.56	44.91	74.00	-29.09	Peak	Vertical
	11579.10	34.61	5.19	39.80	54.00	-14.20	Average	Vertical
	11579.10	43.27	5.19	48.46	74.00	-25.54	Peak	Vertical
*	14574.50	45.81	5.70	51.51	68.20	-16.69	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ax-HE80 - Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11458.40	30.94	5.41	36.35	54.00	-17.65	Average	Horizontal
	11458.40	43.14	5.41	48.55	74.00	-25.45	Peak	Horizontal
*	12714.70	45.23	5.60	50.83	68.20	-17.37	Peak	Horizontal
*	15281.70	46.81	6.05	52.86	68.20	-15.34	Peak	Horizontal
	16145.30	33.81	6.22	40.03	54.00	-13.97	Average	Horizontal
	16145.30	46.44	6.22	52.66	74.00	-21.34	Peak	Horizontal
*	9823.00	41.27	6.89	48.16	68.20	-20.04	Peak	Vertical
	11055.50	39.63	5.52	45.15	74.00	-28.85	Peak	Vertical
	12362.80	41.61	4.87	46.48	74.00	-27.52	Peak	Vertical
*	15271.50	45.86	6.07	51.93	68.20	-16.27	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ax-HE80 - Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10067.80	41.47	6.42	47.89	68.20	-20.31	Peak	Horizontal
	10939.90	39.52	5.46	44.98	74.00	-29.02	Peak	Horizontal
	11939.50	40.15	5.02	45.17	74.00	-28.83	Peak	Horizontal
*	14464.00	45.19	5.89	51.08	68.20	-17.12	Peak	Horizontal
*	10166.40	40.81	6.41	47.22	68.20	-20.98	Peak	Vertical
	11448.20	40.27	5.43	45.70	74.00	-28.30	Peak	Vertical
	11980.30	40.18	5.14	45.32	74.00	-28.68	Peak	Vertical
*	14362.00	45.85	5.73	51.58	68.20	-16.62	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ax-HE80 - Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10446.90	40.92	6.03	46.95	68.20	-21.25	Peak	Horizontal
	11368.30	39.22	5.63	44.85	74.00	-29.15	Peak	Horizontal
	12065.30	40.85	5.19	46.04	74.00	-27.96	Peak	Horizontal
*	12787.80	45.29	5.55	50.84	68.20	-17.36	Peak	Horizontal
*	10406.10	41.23	6.17	47.40	68.20	-20.80	Peak	Vertical
	11691.30	39.43	5.23	44.66	74.00	-29.34	Peak	Vertical
*	15201.80	46.65	5.75	52.40	68.20	-15.80	Peak	Vertical
	16036.50	33.83	6.59	40.42	54.00	-13.58	Average	Vertical
	16036.50	45.79	6.59	52.38	74.00	-21.62	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ax-HE80 - Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9755.00	40.86	6.66	47.52	68.20	-20.68	Peak	Horizontal
	11489.00	40.40	5.42	45.82	74.00	-28.18	Peak	Horizontal
	12690.90	32.07	5.53	37.60	54.00	-16.40	Average	Horizontal
	12690.90	45.37	5.53	50.90	74.00	-23.10	Peak	Horizontal
*	13202.60	46.00	5.26	51.26	68.20	-16.94	Peak	Horizontal
*	10492.80	42.12	5.93	48.05	68.20	-20.15	Peak	Vertical
	11368.30	39.14	5.63	44.77	74.00	-29.23	Peak	Vertical
	12192.80	41.22	4.86	46.08	74.00	-27.92	Peak	Vertical
*	14776.80	45.98	5.46	51.44	68.20	-16.76	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ax-HE80 - Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10509.80	41.30	5.87	47.17	68.20	-21.03	Peak	Horizontal
	11489.00	40.05	5.42	45.47	74.00	-28.53	Peak	Horizontal
	11980.30	40.50	5.14	45.64	74.00	-28.36	Peak	Horizontal
*	15249.40	45.95	5.81	51.76	68.20	-16.44	Peak	Horizontal
*	9211.00	41.11	6.82	47.93	68.20	-20.27	Peak	Vertical
	11094.60	39.42	5.53	44.95	74.00	-29.05	Peak	Vertical
	11980.30	40.32	5.14	45.46	74.00	-28.54	Peak	Vertical
*	16339.10	46.35	5.49	51.84	68.20	-16.36	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ax-HE80 - Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9712.50	40.72	6.67	47.39	68.20	-20.81	Peak	Horizontal
	11132.00	39.18	5.59	44.77	74.00	-29.23	Peak	Horizontal
	11897.00	40.76	5.20	45.96	74.00	-28.04	Peak	Horizontal
*	14584.70	45.91	5.73	51.64	68.20	-16.56	Peak	Horizontal
*	10100.10	41.31	6.35	47.66	68.20	-20.54	Peak	Vertical
	11171.10	39.51	5.56	45.07	74.00	-28.93	Peak	Vertical
	11856.20	39.71	5.14	44.85	74.00	-29.15	Peak	Vertical
*	13029.20	45.65	5.01	50.66	68.20	-17.54	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ax-HE160 - Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9683.60	41.33	6.67	48.00	68.20	-20.20	Peak	Horizontal
	11132.00	39.52	5.59	45.11	74.00	-28.89	Peak	Horizontal
	12235.30	41.28	5.03	46.31	74.00	-27.69	Peak	Horizontal
*	14588.10	45.98	5.74	51.72	68.20	-16.48	Peak	Horizontal
*	10224.20	41.32	6.22	47.54	68.20	-20.66	Peak	Vertical
	11210.20	39.61	5.47	45.08	74.00	-28.92	Peak	Vertical
	11939.50	40.10	5.02	45.12	74.00	-28.88	Peak	Vertical
*	16738.60	47.59	4.35	51.94	68.20	-16.26	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ax-HE160 - Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10203.80	41.59	6.68	48.27	68.20	-19.93	Peak	Horizontal
	11329.20	40.33	5.68	46.01	74.00	-27.99	Peak	Horizontal
	12407.00	42.00	4.95	46.95	74.00	-27.05	Peak	Horizontal
*	16560.10	46.95	4.73	51.68	68.20	-16.52	Peak	Horizontal
*	9816.20	40.50	7.03	47.53	68.20	-20.67	Peak	Vertical
	11094.60	39.55	5.53	45.08	74.00	-28.92	Peak	Vertical
	11939.50	41.37	5.02	46.39	74.00	-27.61	Peak	Vertical
*	14628.90	45.83	5.81	51.64	68.20	-16.56	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT20 - Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9982.80	40.51	6.68	47.19	68.20	-21.01	Peak	Horizontal
	11312.20	42.45	5.72	48.17	74.00	-25.83	Peak	Horizontal
	12063.60	43.15	5.20	48.35	74.00	-25.65	Peak	Horizontal
*	13884.30	45.40	5.10	50.50	68.20	-17.70	Peak	Horizontal
*	10316.00	41.70	6.18	47.88	68.20	-20.32	Peak	Vertical
	11014.70	42.99	5.22	48.21	74.00	-25.79	Peak	Vertical
	12179.20	43.45	4.96	48.41	74.00	-25.59	Peak	Vertical
*	13869.00	45.16	5.04	50.20	68.20	-18.00	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT20 - Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9913.10	40.96	6.49	47.45	68.20	-20.75	Peak	Horizontal
	11528.10	43.40	5.35	48.75	74.00	-25.25	Peak	Horizontal
	12204.70	44.45	4.84	49.29	74.00	-24.71	Peak	Horizontal
*	14083.20	44.63	5.60	50.23	68.20	-17.97	Peak	Horizontal
*	9826.40	40.94	6.83	47.77	68.20	-20.43	Peak	Vertical
	11395.50	42.14	5.52	47.66	74.00	-26.34	Peak	Vertical
	12369.60	43.60	4.80	48.40	74.00	-25.60	Peak	Vertical
*	14015.20	45.50	5.47	50.97	68.20	-17.23	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT20 - Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10203.80	40.61	6.68	47.29	68.20	-20.91	Peak	Horizontal
	11426.10	43.34	5.61	48.95	74.00	-25.05	Peak	Horizontal
	12203.00	43.94	4.84	48.78	74.00	-25.22	Peak	Horizontal
*	14217.50	45.47	5.51	50.98	68.20	-17.22	Peak	Horizontal
*	9819.60	40.71	6.96	47.67	68.20	-20.53	Peak	Vertical
	11288.40	42.90	5.69	48.59	74.00	-25.41	Peak	Vertical
	12182.60	44.29	4.92	49.21	74.00	-24.79	Peak	Vertical
*	14066.20	45.40	5.42	50.82	68.20	-17.38	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT20 - Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10123.90	41.42	6.09	47.51	68.20	-20.69	Peak	Horizontal
	11716.80	44.84	5.22	50.06	74.00	-23.94	Peak	Horizontal
	12534.50	45.46	5.19	50.65	74.00	-23.35	Peak	Horizontal
*	13794.20	45.46	4.99	50.45	68.20	-17.75	Peak	Horizontal
*	9964.10	41.12	6.42	47.54	68.20	-20.66	Peak	Vertical
	11388.70	43.02	5.56	48.58	74.00	-25.42	Peak	Vertical
	12065.30	43.83	5.19	49.02	74.00	-24.98	Peak	Vertical
*	13869.00	46.01	5.04	51.05	68.20	-17.15	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT20 - Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10253.10	41.03	6.30	47.33	68.20	-20.87	Peak	Horizontal
	11285.00	42.44	5.70	48.14	74.00	-25.86	Peak	Horizontal
	12089.10	43.60	5.14	48.74	74.00	-25.26	Peak	Horizontal
*	13933.60	46.38	5.11	51.49	68.20	-16.71	Peak	Horizontal
*	9823.00	40.89	6.89	47.78	68.20	-20.42	Peak	Vertical
	11079.30	42.05	5.49	47.54	74.00	-26.46	Peak	Vertical
	12126.50	43.79	5.06	48.85	74.00	-25.15	Peak	Vertical
*	14105.30	45.46	5.75	51.21	68.20	-16.99	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT20 - Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10360.20	42.26	6.42	48.68	68.20	-19.52	Peak	Horizontal
	11655.60	44.30	5.19	49.49	74.00	-24.51	Peak	Horizontal
	12656.90	46.08	5.37	51.45	74.00	-22.55	Peak	Horizontal
*	13989.70	45.74	5.66	51.40	68.20	-16.80	Peak	Horizontal
*	10095.00	41.94	6.34	48.28	68.20	-19.92	Peak	Vertical
	11251.00	42.29	5.77	48.06	74.00	-25.94	Peak	Vertical
	11857.90	43.83	5.18	49.01	74.00	-24.99	Peak	Vertical
*	14090.00	45.81	5.68	51.49	68.20	-16.71	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT20 - Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9984.50	41.19	6.70	47.89	68.20	-20.31	Peak	Horizontal
	11189.80	42.83	5.36	48.19	74.00	-25.81	Peak	Horizontal
	11975.20	44.79	5.18	49.97	74.00	-24.03	Peak	Horizontal
*	13965.90	45.04	5.48	50.52	68.20	-17.68	Peak	Horizontal
*	9901.20	41.50	6.46	47.96	68.20	-20.24	Peak	Vertical
	11558.70	42.95	5.33	48.28	74.00	-25.72	Peak	Vertical
	11902.10	43.02	5.25	48.27	74.00	-25.73	Peak	Vertical
*	13867.30	45.88	5.02	50.90	68.20	-17.30	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT20 - Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10278.60	42.30	6.29	48.59	68.20	-19.61	Peak	Horizontal
	11302.00	42.82	5.66	48.48	74.00	-25.52	Peak	Horizontal
	12082.30	43.65	5.12	48.77	74.00	-25.23	Peak	Horizontal
*	13965.90	45.35	5.48	50.83	68.20	-17.37	Peak	Horizontal
*	10197.00	41.15	6.67	47.82	68.20	-20.38	Peak	Vertical
	11329.20	42.88	5.68	48.56	74.00	-25.44	Peak	Vertical
	12288.00	45.01	5.08	50.09	74.00	-23.91	Peak	Vertical
*	14066.20	45.85	5.42	51.27	68.20	-16.93	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT20 - Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9862.10	40.80	6.52	47.32	68.20	-20.88	Peak	Horizontal
	11177.90	42.48	5.42	47.90	74.00	-26.10	Peak	Horizontal
	12153.70	43.66	5.04	48.70	74.00	-25.30	Peak	Horizontal
*	13903.00	46.57	5.10	51.67	68.20	-16.53	Peak	Horizontal
*	10139.20	41.28	6.43	47.71	68.20	-20.49	Peak	Vertical
	11647.10	43.41	5.28	48.69	74.00	-25.31	Peak	Vertical
	12425.70	44.62	4.96	49.58	74.00	-24.42	Peak	Vertical
*	14069.60	45.85	5.46	51.31	68.20	-16.89	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT20 - Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10227.60	41.55	6.24	47.79	68.20	-20.41	Peak	Horizontal
	11502.60	42.83	5.67	48.50	74.00	-25.50	Peak	Horizontal
	12162.20	45.19	5.04	50.23	74.00	-23.77	Peak	Horizontal
*	13989.70	45.34	5.66	51.00	68.20	-17.20	Peak	Horizontal
*	10242.90	41.56	6.61	48.17	68.20	-20.03	Peak	Vertical
	11419.30	43.37	5.68	49.05	74.00	-24.95	Peak	Vertical
	11895.30	43.66	5.17	48.83	74.00	-25.17	Peak	Vertical
*	14144.40	45.88	5.56	51.44	68.20	-16.76	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT20 - Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10241.20	41.50	6.60	48.10	68.20	-20.10	Peak	Horizontal
	11257.80	43.04	5.60	48.64	74.00	-25.36	Peak	Horizontal
	12303.30	44.67	4.83	49.50	74.00	-24.50	Peak	Horizontal
*	13940.40	45.87	5.20	51.07	68.20	-17.13	Peak	Horizontal
*	10227.60	41.89	6.24	48.13	68.20	-20.07	Peak	Vertical
	11526.40	43.19	5.37	48.56	74.00	-25.44	Peak	Vertical
	12084.00	44.39	5.12	49.51	74.00	-24.49	Peak	Vertical
*	14163.10	44.87	5.64	50.51	68.20	-17.69	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT20 - Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10067.80	41.63	6.42	48.05	68.20	-20.15	Peak	Horizontal
	11565.50	36.67	5.26	41.93	54.00	-12.07	Average	Horizontal
	11565.50	44.46	5.26	49.72	74.00	-24.28	Peak	Horizontal
	12213.20	44.92	4.87	49.79	74.00	-24.21	Peak	Horizontal
*	14120.60	46.03	5.61	51.64	68.20	-16.56	Peak	Horizontal
*	10062.70	40.99	6.44	47.43	68.20	-20.77	Peak	Vertical
	11574.00	33.88	5.18	39.06	54.00	-14.94	Average	Vertical
	11574.00	46.57	5.18	51.75	74.00	-22.25	Peak	Vertical
	12286.30	43.93	5.07	49.00	74.00	-25.00	Peak	Vertical
*	13870.70	45.75	5.05	50.80	68.20	-17.40	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT20 - Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10168.10	42.44	6.41	48.85	68.20	-19.35	Peak	Horizontal
	11057.20	42.50	5.53	48.03	74.00	-25.97	Peak	Horizontal
	11653.90	38.87	5.21	44.08	54.00	-9.92	Average	Horizontal
	11653.90	46.60	5.21	51.81	74.00	-22.19	Peak	Horizontal
*	15091.30	47.56	5.96	53.52	68.20	-14.68	Peak	Horizontal
*	10229.30	41.38	6.28	47.66	68.20	-20.54	Peak	Vertical
	11655.60	40.12	5.19	45.31	54.00	-8.69	Average	Vertical
	11655.60	50.00	5.19	55.19	74.00	-18.81	Peak	Vertical
	12160.50	44.27	5.04	49.31	74.00	-24.69	Peak	Vertical
*	14023.70	45.91	5.30	51.21	68.20	-16.99	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT40 - Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10171.50	41.68	6.42	48.10	68.20	-20.10	Peak	Horizontal
	11169.40	42.77	5.59	48.36	74.00	-25.64	Peak	Horizontal
	12209.80	44.82	4.86	49.68	74.00	-24.32	Peak	Horizontal
*	13954.00	45.04	5.32	50.36	68.20	-17.84	Peak	Horizontal
*	10066.10	41.60	6.42	48.02	68.20	-20.18	Peak	Vertical
	11208.50	43.06	5.46	48.52	74.00	-25.48	Peak	Vertical
	12163.90	44.85	5.04	49.89	74.00	-24.11	Peak	Vertical
*	14158.00	45.79	5.62	51.41	68.20	-16.79	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT40 - Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9994.70	42.04	6.63	48.67	68.20	-19.53	Peak	Horizontal
	11412.50	42.72	5.61	48.33	74.00	-25.67	Peak	Horizontal
	12080.60	44.29	5.13	49.42	74.00	-24.58	Peak	Horizontal
*	14001.60	44.90	5.62	50.52	68.20	-17.68	Peak	Horizontal
*	9743.10	41.55	6.81	48.36	68.20	-19.84	Peak	Vertical
	11438.00	43.76	5.49	49.25	74.00	-24.75	Peak	Vertical
	12158.80	44.41	5.04	49.45	74.00	-24.55	Peak	Vertical
*	13727.90	45.35	4.82	50.17	68.20	-18.03	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT40 - Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10050.80	41.11	6.47	47.58	68.20	-20.62	Peak	Horizontal
	11397.20	43.33	5.51	48.84	74.00	-25.16	Peak	Horizontal
	12291.40	44.99	5.03	50.02	74.00	-23.98	Peak	Horizontal
*	14826.10	46.69	5.67	52.36	68.20	-15.84	Peak	Horizontal
*	10174.90	41.49	6.43	47.92	68.20	-20.28	Peak	Vertical
	11307.10	43.17	5.69	48.86	74.00	-25.14	Peak	Vertical
	12551.50	44.99	5.21	50.20	74.00	-23.80	Peak	Vertical
*	14302.50	45.92	5.75	51.67	68.20	-16.53	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT40 - Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9851.90	41.71	6.49	48.20	68.20	-20.00	Peak	Horizontal
	10968.80	43.22	5.29	48.51	74.00	-25.49	Peak	Horizontal
	12267.60	43.78	4.91	48.69	74.00	-25.31	Peak	Horizontal
*	14115.50	46.01	5.68	51.69	68.20	-16.51	Peak	Horizontal
*	9806.00	41.61	6.75	48.36	68.20	-19.84	Peak	Vertical
	11390.40	43.56	5.55	49.11	74.00	-24.89	Peak	Vertical
	11910.60	44.22	5.33	49.55	74.00	-24.45	Peak	Vertical
*	14108.70	45.87	5.74	51.61	68.20	-16.59	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT40 - Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9821.30	41.34	6.93	48.27	68.20	-19.93	Peak	Horizontal
	11463.50	43.72	5.43	49.15	74.00	-24.85	Peak	Horizontal
	12369.60	45.16	4.80	49.96	74.00	-24.04	Peak	Horizontal
*	14232.80	45.53	5.59	51.12	68.20	-17.08	Peak	Horizontal
*	9812.80	41.01	6.95	47.96	68.20	-20.24	Peak	Vertical
	11222.10	43.02	5.53	48.55	74.00	-25.45	Peak	Vertical
	12328.80	44.65	4.82	49.47	74.00	-24.53	Peak	Vertical
*	14278.70	45.44	5.69	51.13	68.20	-17.07	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT40 - Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10166.40	41.51	6.41	47.92	68.20	-20.28	Peak	Horizontal
	10890.60	42.77	5.50	48.27	74.00	-25.73	Peak	Horizontal
	11874.90	45.35	4.99	50.34	74.00	-23.66	Peak	Horizontal
*	14362.00	46.13	5.73	51.86	68.20	-16.34	Peak	Horizontal
*	10390.80	42.47	6.16	48.63	68.20	-19.57	Peak	Vertical
	11531.50	44.07	5.30	49.37	74.00	-24.63	Peak	Vertical
	12260.80	44.64	4.93	49.57	74.00	-24.43	Peak	Vertical
*	13773.80	47.20	4.93	52.13	68.20	-16.07	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT40 - Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10030.40	41.98	6.26	48.24	68.20	-19.96	Peak	Horizontal
	11400.60	43.05	5.49	48.54	74.00	-25.46	Peak	Horizontal
	12344.10	44.49	4.78	49.27	74.00	-24.73	Peak	Horizontal
*	13920.00	45.76	5.07	50.83	68.20	-17.37	Peak	Horizontal
*	9909.70	41.69	6.48	48.17	68.20	-20.03	Peak	Vertical
	11517.90	43.15	5.50	48.65	74.00	-25.35	Peak	Vertical
	12371.30	44.39	4.78	49.17	74.00	-24.83	Peak	Vertical
*	14186.90	46.21	5.65	51.86	68.20	-16.34	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT40 - Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10183.40	41.11	6.54	47.65	68.20	-20.55	Peak	Horizontal
	11349.60	42.93	5.61	48.54	74.00	-25.46	Peak	Horizontal
	11961.60	44.22	5.23	49.45	74.00	-24.55	Peak	Horizontal
*	14095.10	45.73	5.74	51.47	68.20	-16.73	Peak	Horizontal
*	10101.80	41.55	6.36	47.91	68.20	-20.29	Peak	Vertical
	11308.80	42.68	5.70	48.38	74.00	-25.62	Peak	Vertical
	11941.20	44.11	5.01	49.12	74.00	-24.88	Peak	Vertical
*	14016.90	45.13	5.44	50.57	68.20	-17.63	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT40 - Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9816.20	40.89	7.03	47.92	68.20	-20.28	Peak	Horizontal
	11075.90	42.76	5.49	48.25	74.00	-25.75	Peak	Horizontal
	11691.30	44.65	5.23	49.88	74.00	-24.12	Peak	Horizontal
*	14090.00	45.35	5.68	51.03	68.20	-17.17	Peak	Horizontal
*	10180.00	42.16	6.49	48.65	68.20	-19.55	Peak	Vertical
	11053.80	42.03	5.51	47.54	74.00	-26.46	Peak	Vertical
	12021.10	43.78	5.18	48.96	74.00	-25.04	Peak	Vertical
*	13957.40	45.36	5.35	50.71	68.20	-17.49	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT40 - Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10135.80	41.98	6.36	48.34	68.20	-19.86	Peak	Horizontal
	11262.90	42.72	5.48	48.20	74.00	-25.80	Peak	Horizontal
	12060.20	43.93	5.21	49.14	74.00	-24.86	Peak	Horizontal
*	13969.30	45.87	5.53	51.40	68.20	-16.80	Peak	Horizontal
*	10231.00	41.85	6.32	48.17	68.20	-20.03	Peak	Vertical
	11347.90	43.22	5.61	48.83	74.00	-25.17	Peak	Vertical
	12157.10	44.11	5.04	49.15	74.00	-24.85	Peak	Vertical
*	14008.40	45.65	5.59	51.24	68.20	-16.96	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT80 - Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10312.60	41.55	6.17	47.72	68.20	-20.48	Peak	Horizontal
	11400.60	43.35	5.49	48.84	74.00	-25.16	Peak	Horizontal
	12265.90	44.30	4.92	49.22	74.00	-24.78	Peak	Horizontal
*	14086.60	45.43	5.64	51.07	68.20	-17.13	Peak	Horizontal
*	10195.30	41.96	6.67	48.63	68.20	-19.57	Peak	Vertical
	11319.00	42.76	5.74	48.50	74.00	-25.50	Peak	Vertical
	12272.70	44.28	4.92	49.20	74.00	-24.80	Peak	Vertical
*	14358.60	46.56	5.72	52.28	68.20	-15.92	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT80 - Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9840.00	41.63	6.59	48.22	68.20	-19.98	Peak	Horizontal
	11407.40	42.82	5.55	48.37	74.00	-25.63	Peak	Horizontal
	11973.50	44.26	5.19	49.45	74.00	-24.55	Peak	Horizontal
*	14229.40	44.72	5.58	50.30	68.20	-17.90	Peak	Horizontal
*	9970.90	41.20	6.51	47.71	68.20	-20.49	Peak	Vertical
	11546.80	43.06	5.27	48.33	74.00	-25.67	Peak	Vertical
	12447.80	44.99	4.93	49.92	74.00	-24.08	Peak	Vertical
*	14118.90	44.55	5.63	50.18	68.20	-18.02	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT80 - Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9816.20	42.02	7.03	49.05	68.20	-19.15	Peak	Horizontal
	11327.50	42.82	5.69	48.51	74.00	-25.49	Peak	Horizontal
	12541.30	43.92	5.29	49.21	74.00	-24.79	Peak	Horizontal
*	14015.20	45.87	5.47	51.34	68.20	-16.86	Peak	Horizontal
*	10207.20	41.35	6.69	48.04	68.20	-20.16	Peak	Vertical
	11351.30	43.07	5.61	48.68	74.00	-25.32	Peak	Vertical
	12425.70	44.99	4.96	49.95	74.00	-24.05	Peak	Vertical
*	14185.20	46.46	5.64	52.10	68.20	-16.10	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT80 - Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9875.70	42.17	6.43	48.60	68.20	-19.60	Peak	Horizontal
	11157.50	42.79	5.61	48.40	74.00	-25.60	Peak	Horizontal
	12245.50	44.30	4.99	49.29	74.00	-24.71	Peak	Horizontal
*	14130.80	46.13	5.54	51.67	68.20	-16.53	Peak	Horizontal
*	10156.20	42.44	6.32	48.76	68.20	-19.44	Peak	Vertical
	11108.20	42.71	5.56	48.27	74.00	-25.73	Peak	Vertical
	12259.10	44.66	4.93	49.59	74.00	-24.41	Peak	Vertical
*	14268.50	45.05	5.72	50.77	68.20	-17.43	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT80 - Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10242.90	41.51	6.61	48.12	68.20	-20.08	Peak	Horizontal
	11234.00	42.46	5.64	48.10	74.00	-25.90	Peak	Horizontal
	12461.40	44.00	5.17	49.17	74.00	-24.83	Peak	Horizontal
*	14130.80	45.52	5.54	51.06	68.20	-17.14	Peak	Horizontal
*	10117.10	42.03	6.16	48.19	68.20	-20.01	Peak	Vertical
	11618.20	43.92	5.16	49.08	74.00	-24.92	Peak	Vertical
	12301.60	44.24	4.86	49.10	74.00	-24.90	Peak	Vertical
*	14312.70	45.04	5.80	50.84	68.20	-17.36	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT80 - Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9732.90	41.19	6.79	47.98	68.20	-20.22	Peak	Horizontal
	11346.20	43.43	5.62	49.05	74.00	-24.95	Peak	Horizontal
	12048.30	43.87	5.22	49.09	74.00	-24.91	Peak	Horizontal
*	14205.60	45.48	5.61	51.09	68.20	-17.11	Peak	Horizontal
*	10236.10	41.08	6.44	47.52	68.20	-20.68	Peak	Vertical
	11393.80	43.63	5.53	49.16	74.00	-24.84	Peak	Vertical
	12044.90	44.41	5.21	49.62	74.00	-24.38	Peak	Vertical
*	14173.30	45.39	5.62	51.01	68.20	-17.19	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT160 - Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9868.90	41.49	6.46	47.95	68.20	-20.25	Peak	Horizontal
	11383.60	44.03	5.58	49.61	74.00	-24.39	Peak	Horizontal
	12240.40	44.30	5.02	49.32	74.00	-24.68	Peak	Horizontal
*	13955.70	45.35	5.34	50.69	68.20	-17.51	Peak	Horizontal
*	10004.90	41.95	6.51	48.46	68.20	-19.74	Peak	Vertical
	11426.10	43.38	5.61	48.99	74.00	-25.01	Peak	Vertical
	11897.00	44.57	5.20	49.77	74.00	-24.23	Peak	Vertical
*	14307.60	45.41	5.77	51.18	68.20	-17.02	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-02	Test Mode	802.11be-EHT160-Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9824.70	41.59	6.86	48.45	68.20	-19.75	Peak	Horizontal
	11417.60	42.54	5.67	48.21	74.00	-25.79	Peak	Horizontal
	12126.50	43.89	5.06	48.95	74.00	-25.05	Peak	Horizontal
*	14277.00	45.90	5.69	51.59	68.20	-16.61	Peak	Horizontal
*	10171.50	41.29	6.42	47.71	68.20	-20.49	Peak	Vertical
	11252.70	42.79	5.73	48.52	74.00	-25.48	Peak	Vertical
	11640.30	44.08	5.36	49.44	74.00	-24.56	Peak	Vertical
*	14256.60	45.65	5.59	51.24	68.20	-16.96	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Dual-band mode

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11a - Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11171.10	39.70	5.56	45.26	74.00	-28.74	Peak	Horizontal
	11980.30	41.42	5.14	46.56	74.00	-27.44	Peak	Horizontal
*	13219.60	47.55	5.06	52.61	68.20	-15.59	Peak	Horizontal
*	14924.70	46.77	5.72	52.49	68.20	-15.71	Peak	Horizontal
*	9778.80	40.87	6.46	47.33	68.20	-20.87	Peak	Vertical
	11016.40	38.82	5.27	44.09	74.00	-29.91	Peak	Vertical
	11980.30	39.66	5.14	44.80	74.00	-29.20	Peak	Vertical
*	14855.00	45.65	5.72	51.37	68.20	-16.83	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11a - Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10339.80	41.34	6.13	47.47	68.20	-20.73	Peak	Horizontal
	11329.20	39.33	5.68	45.01	74.00	-28.99	Peak	Horizontal
	12449.50	41.19	4.97	46.16	74.00	-27.84	Peak	Horizontal
*	16791.30	48.14	3.99	52.13	68.20	-16.07	Peak	Horizontal
*	10244.60	41.97	6.56	48.53	68.20	-19.67	Peak	Vertical
	11368.30	39.95	5.63	45.58	74.00	-28.42	Peak	Vertical
	12362.80	41.80	4.87	46.67	74.00	-27.33	Peak	Vertical
*	14644.20	45.86	6.01	51.87	68.20	-16.33	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11a - Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9833.20	41.25	6.70	47.95	68.20	-20.25	Peak	Horizontal
	10939.90	39.62	5.46	45.08	74.00	-28.92	Peak	Horizontal
	12022.80	40.04	5.18	45.22	74.00	-28.78	Peak	Horizontal
*	15217.10	45.75	5.88	51.63	68.20	-16.57	Peak	Horizontal
*	10191.90	40.95	6.68	47.63	68.20	-20.57	Peak	Vertical
	11568.90	39.59	5.22	44.81	74.00	-29.19	Peak	Vertical
	12407.00	41.48	4.95	46.43	74.00	-27.57	Peak	Vertical
*	16651.90	47.75	4.46	52.21	68.20	-15.99	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11a - Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10249.70	41.31	6.40	47.71	68.20	-20.49	Peak	Horizontal
	10979.00	38.83	5.20	44.03	74.00	-29.97	Peak	Horizontal
	12148.60	40.63	5.04	45.67	74.00	-28.33	Peak	Horizontal
*	14520.10	46.00	5.81	51.81	68.20	-16.39	Peak	Horizontal
*	9884.20	40.97	6.47	47.44	68.20	-20.76	Peak	Vertical
	11016.40	39.63	5.27	44.90	74.00	-29.10	Peak	Vertical
	12065.30	39.98	5.19	45.17	74.00	-28.83	Peak	Vertical
*	14465.70	45.51	5.94	51.45	68.20	-16.75	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11a - Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9887.60	41.27	6.48	47.75	68.20	-20.45	Peak	Horizontal
	11132.00	39.50	5.59	45.09	74.00	-28.91	Peak	Horizontal
	12362.80	40.83	4.87	45.70	74.00	-28.30	Peak	Horizontal
*	14798.9	45.69	5.71	51.41	68.20	-16.79	Peak	Horizontal
*	10207.20	41.37	6.69	48.06	68.20	-20.14	Peak	Vertical
	11132.00	38.91	5.59	44.50	74.00	-29.50	Peak	Vertical
	12065.30	40.83	5.19	46.02	74.00	-27.98	Peak	Vertical
*	14256.60	45.96	5.59	51.55	68.20	-16.65	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11a - Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9816.20	41.38	7.03	48.41	68.20	-19.79	Peak	Horizontal
	11094.60	39.56	5.53	45.09	74.00	-28.91	Peak	Horizontal
	12407.00	41.14	4.95	46.09	74.00	-27.91	Peak	Horizontal
*	15227.30	45.93	5.87	51.80	68.20	-16.40	Peak	Horizontal
*	9823.00	40.34	6.89	47.23	68.20	-20.97	Peak	Vertical
	11251.00	39.72	5.77	45.49	74.00	-28.51	Peak	Vertical
	12192.80	41.37	4.86	46.23	74.00	-27.77	Peak	Vertical
*	15106.60	46.06	5.87	51.93	68.20	-16.27	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11a - Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10305.80	41.10	6.15	47.25	68.20	-20.95	Peak	Horizontal
	10979.00	39.47	5.20	44.67	74.00	-29.33	Peak	Horizontal
	12277.80	40.99	4.97	45.96	74.00	-28.04	Peak	Horizontal
*	14855.00	45.84	5.72	51.56	68.20	-16.64	Peak	Horizontal
*	10426.50	41.59	6.09	47.68	68.20	-20.52	Peak	Vertical
	11132.00	39.23	5.59	44.82	74.00	-29.18	Peak	Vertical
	11939.50	39.69	5.02	44.71	74.00	-29.29	Peak	Vertical
*	14702.00	46.37	5.53	51.90	68.20	-16.30	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11a - Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10399.30	41.95	6.14	48.09	68.20	-20.11	Peak	Horizontal
	11210.20	39.16	5.47	44.63	74.00	-29.37	Peak	Horizontal
	12277.80	41.40	4.97	46.37	74.00	-27.63	Peak	Horizontal
*	17112.60	48.04	3.49	51.53	68.20	-16.67	Peak	Horizontal
*	10370.40	41.32	6.34	47.66	68.20	-20.54	Peak	Vertical
	11290.10	39.79	5.69	45.48	74.00	-28.52	Peak	Vertical
	12065.30	40.50	5.19	45.69	74.00	-28.31	Peak	Vertical
*	14921.30	46.24	5.68	51.92	68.20	-16.28	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11a - Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9680.20	40.37	6.69	47.06	68.20	-21.14	Peak	Horizontal
	10902.50	38.44	5.59	44.03	74.00	-29.97	Peak	Horizontal
	11897.00	40.54	5.20	45.74	74.00	-28.26	Peak	Horizontal
*	15067.50	45.71	5.67	51.38	68.20	-16.82	Peak	Horizontal
*	10074.60	41.13	6.40	47.53	68.20	-20.67	Peak	Vertical
	11132.00	39.90	5.59	45.49	74.00	-28.51	Peak	Vertical
	11939.50	40.87	5.02	45.89	74.00	-28.11	Peak	Vertical
*	15164.40	46.19	5.89	52.08	68.20	-16.12	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11a - Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10244.60	41.16	6.56	47.72	68.20	-20.48	Peak	Horizontal
	11132.00	38.98	5.59	44.57	74.00	-29.43	Peak	Horizontal
	11980.30	40.40	5.14	45.54	74.00	-28.46	Peak	Horizontal
*	14877.10	45.80	5.74	51.54	68.20	-16.66	Peak	Horizontal
*	10049.10	40.96	6.45	47.41	68.20	-20.79	Peak	Vertical
	11329.20	40.14	5.68	45.82	74.00	-28.18	Peak	Vertical
	12235.30	41.17	5.03	46.20	74.00	-27.80	Peak	Vertical
*	15300.40	45.94	5.96	51.90	68.20	-16.30	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11a - Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11482.20	35.03	5.43	40.46	54.00	-13.54	Average	Horizontal
	11482.20	43.32	5.43	48.75	74.00	-25.25	Peak	Horizontal
	12119.70	41.55	5.08	46.63	74.00	-27.37	Peak	Horizontal
*	12913.60	44.69	5.53	50.22	68.20	-17.98	Peak	Horizontal
*	15104.90	45.37	5.89	51.26	68.20	-16.94	Peak	Horizontal
	10904.20	39.41	5.59	45.00	74.00	-29.00	Peak	Vertical
	11480.50	37.91	5.45	43.36	54.00	-10.64	Average	Vertical
	11480.50	45.58	5.45	51.03	74.00	-22.97	Peak	Vertical
*	13214.50	44.81	5.10	49.91	68.20	-18.29	Peak	Vertical
*	14462.30	46.16	5.84	52.00	68.20	-16.20	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11a - Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10137.50	41.23	6.40	47.63	68.20	-20.57	Peak	Horizontal
	11575.70	43.96	5.18	49.14	54.00	-4.86	Average	Horizontal
	11575.70	46.64	5.18	51.82	74.00	-22.18	Peak	Horizontal
	12107.80	40.16	5.13	45.29	74.00	-28.71	Peak	Horizontal
*	13207.70	45.73	5.16	50.89	68.20	-17.31	Peak	Horizontal
*	10231.00	41.03	6.32	47.35	68.20	-20.85	Peak	Vertical
	11574.00	48.58	5.18	53.76	54.00	-0.24	Average	Vertical
	11574.00	52.99	5.18	58.17	74.00	-15.83	Peak	Vertical
	12362.80	40.33	4.87	45.20	74.00	-28.80	Peak	Vertical
*	16279.60	47.03	5.44	52.47	68.20	-15.73	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11a - Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10035.50	40.98	6.27	47.25	68.20	-20.95	Peak	Horizontal
	11368.30	39.59	5.63	45.22	74.00	-28.78	Peak	Horizontal
	11652.20	42.87	5.23	48.10	54.00	-5.90	Average	Horizontal
	11652.20	50.82	5.23	56.05	74.00	-17.95	Peak	Horizontal
*	14858.40	46.04	5.69	51.73	68.20	-16.47	Peak	Horizontal
*	10373.80	41.56	6.30	47.86	68.20	-20.34	Peak	Vertical
	11652.20	43.83	5.23	49.06	54.00	-4.94	Average	Vertical
	11652.20	53.93	5.23	59.16	74.00	-14.84	Peak	Vertical
	12192.80	41.52	4.86	46.38	74.00	-27.62	Peak	Vertical
*	14615.30	45.97	5.73	51.70	68.20	-16.50	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT20 - Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10358.50	40.98	6.39	47.37	68.20	-20.83	Peak	Horizontal
	11448.20	39.03	5.43	44.46	74.00	-29.54	Peak	Horizontal
	12537.90	41.17	5.24	46.41	74.00	-27.59	Peak	Horizontal
*	15074.30	46.14	5.80	51.94	68.20	-16.26	Peak	Horizontal
*	9794.10	41.22	6.47	47.69	68.20	-20.51	Peak	Vertical
	11290.10	39.24	5.69	44.93	74.00	-29.07	Peak	Vertical
	12277.80	41.01	4.97	45.98	74.00	-28.02	Peak	Vertical
*	15028.40	45.96	5.78	51.74	68.20	-16.46	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT20 - Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9812.80	40.97	6.95	47.92	68.20	-20.28	Peak	Horizontal
	11171.10	39.54	5.56	45.10	74.00	-28.90	Peak	Horizontal
	12493.70	41.60	4.94	46.54	74.00	-27.46	Peak	Horizontal
*	15169.50	45.68	5.96	51.64	68.20	-16.56	Peak	Horizontal
*	10327.90	41.64	6.19	47.83	68.20	-20.37	Peak	Vertical
	11094.60	39.02	5.53	44.55	74.00	-29.45	Peak	Vertical
	11980.30	41.04	5.14	46.18	74.00	-27.82	Peak	Vertical
*	12792.90	45.94	5.56	51.50	68.20	-16.70	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT20 - Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10249.70	41.36	6.40	47.76	68.20	-20.44	Peak	Horizontal
	10939.90	38.70	5.46	44.16	74.00	-29.84	Peak	Horizontal
	12235.30	40.32	5.03	45.35	74.00	-28.65	Peak	Horizontal
*	15310.60	45.84	5.85	51.69	68.20	-16.51	Peak	Horizontal
*	10401.00	41.23	6.15	47.38	68.20	-20.82	Peak	Vertical
	11251.00	38.99	5.77	44.76	74.00	-29.24	Peak	Vertical
	12449.50	41.10	4.97	46.07	74.00	-27.93	Peak	Vertical
*	14635.70	46.48	5.94	52.42	68.20	-15.78	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT20 - Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10190.20	40.67	6.66	47.33	68.20	-20.87	Peak	Horizontal
	10902.50	39.00	5.59	44.59	74.00	-29.41	Peak	Horizontal
	11980.30	40.56	5.14	45.70	74.00	-28.30	Peak	Horizontal
*	16327.20	46.04	5.49	51.53	68.20	-16.67	Peak	Horizontal
*	10203.80	41.34	6.68	48.02	68.20	-20.18	Peak	Vertical
	10979.00	40.14	5.20	45.34	74.00	-28.66	Peak	Vertical
	11813.70	41.23	4.89	46.12	74.00	-27.88	Peak	Vertical
*	12850.70	45.14	5.54	50.68	68.20	-17.52	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT20 - Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10431.60	42.18	6.08	48.26	68.20	-19.94	Peak	Horizontal
	11329.20	39.57	5.68	45.25	74.00	-28.75	Peak	Horizontal
	12022.80	41.04	5.18	46.22	74.00	-27.78	Peak	Horizontal
*	15278.30	45.36	6.06	51.42	68.20	-16.78	Peak	Horizontal
*	10514.90	42.04	5.92	47.96	68.20	-20.24	Peak	Vertical
	10979.00	40.16	5.20	45.36	74.00	-28.64	Peak	Vertical
	11897.00	41.15	5.20	46.35	74.00	-27.65	Peak	Vertical
*	14254.90	46.07	5.57	51.64	68.20	-16.56	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT20 - Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10198.70	41.23	6.67	47.90	68.20	-20.30	Peak	Horizontal
	11409.10	38.83	5.57	44.40	74.00	-29.60	Peak	Horizontal
	12407.00	40.82	4.95	45.77	74.00	-28.23	Peak	Horizontal
*	15174.60	46.46	5.97	52.43	68.20	-15.77	Peak	Horizontal
*	9806.00	40.75	6.75	47.50	68.20	-20.70	Peak	Vertical
	11016.40	38.91	5.27	44.18	74.00	-29.82	Peak	Vertical
	11897.00	39.60	5.20	44.80	74.00	-29.20	Peak	Vertical
*	14628.90	47.12	5.81	52.93	68.20	-15.27	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT20 - Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10241.20	41.68	6.60	48.28	68.20	-19.92	Peak	Horizontal
	11210.20	39.74	5.47	45.21	74.00	-28.79	Peak	Horizontal
	12320.30	40.83	4.88	45.71	74.00	-28.29	Peak	Horizontal
*	14923.00	45.56	5.70	51.26	68.20	-16.94	Peak	Horizontal
*	10185.10	40.98	6.57	47.55	68.20	-20.65	Peak	Vertical
	11132.00	38.91	5.59	44.50	74.00	-29.50	Peak	Vertical
	12449.50	41.52	4.97	46.49	74.00	-27.51	Peak	Vertical
*	15266.40	45.92	5.99	51.91	68.20	-16.29	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT20 - Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9993.00	40.52	6.64	47.16	68.20	-21.04	Peak	Horizontal
	11409.10	39.53	5.57	45.10	74.00	-28.90	Peak	Horizontal
	12277.80	41.00	4.97	45.97	74.00	-28.03	Peak	Horizontal
*	14550.70	45.25	6.01	51.26	68.20	-16.94	Peak	Horizontal
*	10188.50	40.88	6.63	47.51	68.20	-20.69	Peak	Vertical
	11132.00	39.33	5.59	44.92	74.00	-29.08	Peak	Vertical
	12065.30	40.94	5.19	46.13	74.00	-27.87	Peak	Vertical
*	17116.00	49.07	3.42	52.49	68.20	-15.71	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT20 - Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10006.60	40.71	6.48	47.19	68.20	-21.01	Peak	Horizontal
	11171.10	39.08	5.56	44.64	74.00	-29.36	Peak	Horizontal
	11980.30	39.89	5.14	45.03	74.00	-28.97	Peak	Horizontal
*	14853.30	45.85	5.73	51.58	68.20	-16.62	Peak	Horizontal
*	9918.20	40.28	6.51	46.79	68.20	-21.41	Peak	Vertical
	11448.20	39.17	5.43	44.60	74.00	-29.40	Peak	Vertical
	12192.80	40.34	4.86	45.20	74.00	-28.80	Peak	Vertical
*	15077.70	45.50	5.86	51.36	68.20	-16.84	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT20 - Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11113.30	38.65	5.58	44.23	74.00	-29.77	Peak	Horizontal
	11635.20	39.84	5.30	45.14	74.00	-28.86	Peak	Horizontal
*	12883.00	41.88	5.14	47.02	68.20	-21.18	Peak	Horizontal
*	14047.50	41.58	5.37	46.95	68.20	-21.25	Peak	Horizontal
	11261.20	38.46	5.52	43.98	74.00	-30.02	Peak	Vertical
	11934.40	38.82	5.05	43.87	74.00	-30.13	Peak	Vertical
*	12956.10	42.04	5.28	47.32	68.20	-20.88	Peak	Vertical
*	13998.20	41.56	5.64	47.20	68.20	-21.00	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT20 - Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9987.90	41.90	6.70	48.60	68.20	-19.60	Peak	Horizontal
	10911.00	29.49	5.53	35.02	54.00	-18.98	Average	Horizontal
	10911.00	44.69	5.53	50.22	74.00	-23.78	Peak	Horizontal
	11492.40	34.81	5.47	40.28	54.00	-13.72	Average	Horizontal
	11492.40	45.64	5.47	51.11	74.00	-22.89	Peak	Horizontal
*	14552.40	47.07	6.02	53.09	68.20	-15.11	Peak	Horizontal
*	10411.20	43.42	6.18	49.60	68.20	-18.60	Peak	Vertical
	11489.00	37.26	5.42	42.68	54.00	-11.32	Average	Vertical
	11489.00	46.50	5.42	51.92	74.00	-22.08	Peak	Vertical
	12157.10	42.15	5.04	47.19	74.00	-26.81	Peak	Vertical
*	13930.20	47.16	5.07	52.23	68.20	-15.97	Peak	Vertical

Note 1: "*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT20 - Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	10970.50	38.40	5.25	43.65	74.00	-30.35	Peak	Horizontal
	11568.90	40.16	5.22	45.38	54.00	-8.62	Average	Horizontal
	11568.90	47.17	5.22	52.39	74.00	-21.61	Peak	Horizontal
*	13005.40	40.77	4.81	45.58	68.20	-22.62	Peak	Horizontal
*	14110.40	43.07	5.73	48.80	68.20	-19.40	Peak	Horizontal
	11568.90	40.30	5.22	45.52	54.00	-8.48	Average	Vertical
	11568.90	49.02	5.22	54.24	74.00	-19.76	Peak	Vertical
	12265.90	42.24	4.92	47.16	74.00	-26.84	Peak	Vertical
*	13988.00	45.40	5.65	51.05	68.20	-17.15	Peak	Vertical
*	14664.60	46.68	5.86	52.54	68.20	-15.66	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT20 - Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11647.10	38.99	5.28	44.27	54.00	-9.73	Average	Horizontal
	11647.10	47.90	5.28	53.18	74.00	-20.82	Peak	Horizontal
	12247.20	41.78	4.98	46.76	74.00	-27.24	Peak	Horizontal
*	13758.50	42.19	4.58	46.77	68.20	-21.43	Peak	Horizontal
*	14831.20	43.91	5.69	49.60	68.20	-18.60	Peak	Horizontal
	11647.10	38.99	5.28	44.27	54.00	-9.73	Average	Vertical
	11647.10	47.90	5.28	53.18	74.00	-20.82	Peak	Vertical
	12247.20	41.78	4.98	46.76	74.00	-27.24	Peak	Vertical
*	13758.50	42.19	4.58	46.77	68.20	-21.43	Peak	Vertical
*	14831.20	43.91	5.69	49.60	68.20	-18.60	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT40 - Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11319.00	39.70	5.74	45.44	74.00	-28.56	Peak	Horizontal
	12293.10	40.31	5.00	45.31	74.00	-28.69	Peak	Horizontal
*	13811.20	43.41	4.94	48.35	68.20	-19.85	Peak	Horizontal
*	14999.50	42.53	6.07	48.60	68.20	-19.60	Peak	Horizontal
	11296.90	42.07	5.67	47.74	74.00	-26.26	Peak	Vertical
	11840.90	40.59	4.95	45.54	74.00	-28.46	Peak	Vertical
*	13862.20	41.76	4.99	46.75	68.20	-21.45	Peak	Vertical
*	14943.40	42.79	5.67	48.46	68.20	-19.74	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT40 - Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10305.80	39.25	6.15	45.40	68.20	-22.80	Peak	Horizontal
	11694.70	35.15	5.26	40.41	54.00	-13.59	Average	Horizontal
	11694.70	43.80	5.26	49.06	74.00	-24.94	Peak	Horizontal
	12386.60	41.13	4.77	45.90	74.00	-28.10	Peak	Horizontal
*	14073.00	42.05	5.51	47.56	68.20	-20.64	Peak	Horizontal
	11235.70	39.86	5.67	45.53	74.00	-28.47	Peak	Vertical
	12019.40	40.58	5.18	45.76	74.00	-28.24	Peak	Vertical
*	13758.50	41.55	4.58	46.13	68.20	-22.07	Peak	Vertical
*	14887.30	42.85	5.70	48.55	68.20	-19.65	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT40 - Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9926.70	37.56	6.41	43.97	68.20	-24.23	Peak	Horizontal
	11235.70	38.15	5.67	43.82	74.00	-30.18	Peak	Horizontal
	11885.10	40.09	5.00	45.09	74.00	-28.91	Peak	Horizontal
*	13153.30	42.64	4.69	47.33	68.20	-20.87	Peak	Horizontal
	11448.20	40.64	5.43	46.07	74.00	-27.93	Peak	Vertical
	12432.50	42.07	4.85	46.92	74.00	-27.08	Peak	Vertical
*	13707.50	42.52	4.85	47.37	68.20	-20.83	Peak	Vertical
*	15055.60	43.21	5.77	48.98	68.20	-19.22	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT40 - Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11193.20	40.27	5.36	45.63	74.00	-28.37	Peak	Horizontal
	12111.20	42.15	5.12	47.27	74.00	-26.73	Peak	Horizontal
*	13914.90	45.50	5.10	50.60	68.20	-17.60	Peak	Horizontal
*	15111.70	43.26	5.85	49.11	68.20	-19.09	Peak	Horizontal
*	10152.80	38.54	6.33	44.87	68.20	-23.33	Peak	Vertical
	11235.70	39.68	5.67	45.35	74.00	-28.65	Peak	Vertical
	12293.10	41.90	5.00	46.90	74.00	-27.10	Peak	Vertical
*	14231.10	43.11	5.59	48.70	68.20	-19.50	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT40 - Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9914.80	38.09	6.50	44.59	68.20	-23.61	Peak	Horizontal
	11300.30	39.66	5.65	45.31	74.00	-28.69	Peak	Horizontal
	12065.30	40.90	5.19	46.09	74.00	-27.91	Peak	Horizontal
*	14010.10	43.20	5.58	48.78	68.20	-19.42	Peak	Horizontal
*	10101.80	37.26	6.36	43.62	68.20	-24.58	Peak	Vertical
	11514.50	40.11	5.55	45.66	74.00	-28.34	Peak	Vertical
	12102.70	41.59	5.15	46.74	74.00	-27.26	Peak	Vertical
*	14054.30	42.12	5.36	47.48	68.20	-20.72	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT40 - Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11443.10	39.62	5.46	45.08	74.00	-28.92	Peak	Horizontal
	12065.30	41.09	5.19	46.28	74.00	-27.72	Peak	Horizontal
*	13923.40	42.05	5.04	47.09	68.20	-21.11	Peak	Horizontal
*	15145.70	43.76	5.73	49.49	68.20	-18.71	Peak	Horizontal
	11223.80	42.38	5.54	47.92	74.00	-26.08	Peak	Vertical
	12146.90	42.97	5.05	48.02	74.00	-25.98	Peak	Vertical
*	14033.90	44.76	5.27	50.03	68.20	-18.17	Peak	Vertical
*	14732.60	46.40	5.84	52.24	68.20	-15.96	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT40 - Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10008.30	38.40	6.45	44.85	68.20	-23.35	Peak	Horizontal
	11585.90	40.19	5.20	45.39	74.00	-28.61	Peak	Horizontal
	12407.00	41.55	4.95	46.50	74.00	-27.50	Peak	Horizontal
*	12920.40	42.08	5.61	47.69	68.20	-20.51	Peak	Horizontal
*	10134.10	38.84	6.33	45.17	68.20	-23.03	Peak	Vertical
	11407.40	40.46	5.55	46.01	74.00	-27.99	Peak	Vertical
	12026.20	40.81	5.18	45.99	74.00	-28.01	Peak	Vertical
*	14054.30	42.47	5.36	47.83	68.20	-20.37	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT40 - Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10101.80	39.19	6.36	45.55	68.20	-22.65	Peak	Horizontal
	11730.40	40.81	5.08	45.89	74.00	-28.11	Peak	Horizontal
	12291.40	43.09	5.03	48.12	74.00	-25.88	Peak	Horizontal
*	14010.10	42.28	5.58	47.86	68.20	-20.34	Peak	Horizontal
	11276.50	42.60	5.59	48.19	74.00	-25.81	Peak	Vertical
	12157.10	43.71	5.04	48.75	74.00	-25.25	Peak	Vertical
*	13965.90	43.03	5.48	48.51	68.20	-19.69	Peak	Vertical
*	15098.10	42.31	5.94	48.25	68.20	-19.95	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT40 - Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10129.00	42.71	6.23	48.94	68.20	-19.26	Peak	Horizontal
	10938.20	41.39	5.44	46.83	74.00	-27.17	Peak	Horizontal
	11500.90	33.54	5.63	39.17	54.00	-14.83	Average	Horizontal
	11500.90	44.86	5.63	50.49	74.00	-23.51	Peak	Horizontal
*	12866.00	45.59	5.38	50.97	68.20	-17.23	Peak	Horizontal
*	9870.60	42.38	6.45	48.83	68.20	-19.37	Peak	Vertical
	10769.90	40.76	5.58	46.34	74.00	-27.66	Peak	Vertical
	11512.80	35.37	5.58	40.95	54.00	-13.05	Average	Vertical
	11512.80	45.69	5.58	51.27	74.00	-22.73	Peak	Vertical
*	13226.40	47.24	5.03	52.27	68.20	-15.93	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT40 - Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11585.90	41.56	5.20	46.76	54.00	-7.24	Average	Horizontal
	11585.90	47.17	5.20	52.37	74.00	-21.63	Peak	Horizontal
*	14098.50	41.94	5.76	47.70	68.20	-20.50	Peak	Horizontal
*	15050.50	43.77	5.82	49.59	68.20	-18.61	Peak	Horizontal
	15623.40	43.37	5.87	49.24	74.00	-24.76	Peak	Horizontal
*	9914.80	38.76	6.50	45.26	68.20	-22.94	Peak	Vertical
	11597.80	36.59	5.16	41.75	54.00	-12.25	Average	Vertical
	11597.80	44.93	5.16	50.09	74.00	-23.91	Peak	Vertical
	12026.20	40.39	5.18	45.57	74.00	-28.43	Peak	Vertical
*	13622.50	42.41	4.94	47.35	68.20	-20.85	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT80 - Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10152.80	41.32	6.33	47.65	68.20	-20.55	Peak	Horizontal
	11300.30	40.47	5.65	46.12	74.00	-27.88	Peak	Horizontal
	12216.60	41.76	4.87	46.63	74.00	-27.37	Peak	Horizontal
*	13838.40	44.49	4.94	49.43	68.20	-18.77	Peak	Horizontal
*	10134.10	38.11	6.33	44.44	68.20	-23.76	Peak	Vertical
	11125.20	38.67	5.62	44.29	74.00	-29.71	Peak	Vertical
	12485.20	40.64	4.90	45.54	74.00	-28.46	Peak	Vertical
*	14010.10	42.31	5.58	47.89	68.20	-20.31	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT80 - Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10008.30	38.15	6.45	44.60	68.20	-23.60	Peak	Horizontal
	11336.00	39.80	5.65	45.45	74.00	-28.55	Peak	Horizontal
	12254.00	42.04	4.94	46.98	74.00	-27.02	Peak	Horizontal
*	13879.20	42.17	5.09	47.26	68.20	-20.94	Peak	Horizontal
*	10190.20	40.45	6.66	47.11	68.20	-21.09	Peak	Vertical
	11279.90	41.50	5.65	47.15	74.00	-26.85	Peak	Vertical
	12121.40	43.63	5.08	48.71	74.00	-25.29	Peak	Vertical
*	13880.90	45.06	5.09	50.15	68.20	-18.05	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT80 - Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10071.20	38.40	6.40	44.80	68.20	-23.40	Peak	Horizontal
	11429.50	41.45	5.57	47.02	74.00	-26.98	Peak	Horizontal
	12153.70	43.55	5.04	48.59	74.00	-25.41	Peak	Horizontal
*	14098.50	41.87	5.76	47.63	68.20	-20.57	Peak	Horizontal
*	10038.90	37.28	6.31	43.59	68.20	-24.61	Peak	Vertical
	11194.90	40.03	5.37	45.40	74.00	-28.60	Peak	Vertical
	11915.70	39.79	5.31	45.10	74.00	-28.90	Peak	Vertical
*	14010.10	43.65	5.58	49.23	68.20	-18.97	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT80 - Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10071.20	37.82	6.40	44.22	68.20	-23.98	Peak	Horizontal
	11125.20	39.36	5.62	44.98	74.00	-29.02	Peak	Horizontal
	11917.40	42.20	5.28	47.48	74.00	-26.52	Peak	Horizontal
*	13923.40	42.60	5.04	47.64	68.20	-20.56	Peak	Horizontal
	11149.00	42.29	5.51	47.80	74.00	-26.20	Peak	Vertical
	11852.80	38.15	5.09	43.24	54.00	-10.76	Average	Vertical
	11852.80	43.38	5.09	48.47	74.00	-25.53	Peak	Vertical
*	13794.20	43.07	4.99	48.06	68.20	-20.14	Peak	Vertical
*	15050.50	43.06	5.82	48.88	68.20	-19.32	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT80 - Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10197.00	39.29	6.67	45.96	68.20	-22.24	Peak	Horizontal
	11162.60	35.88	5.68	41.56	54.00	-12.44	Average	Horizontal
	11162.60	42.37	5.68	48.05	74.00	-25.95	Peak	Horizontal
	12092.50	38.26	5.14	43.40	54.00	-10.60	Average	Horizontal
	12092.50	44.27	5.14	49.41	74.00	-24.59	Peak	Horizontal
*	12961.20	41.58	5.25	46.83	68.20	-21.37	Peak	Horizontal
*	9938.60	39.87	6.33	46.20	68.20	-22.00	Peak	Vertical
	11084.40	42.32	5.50	47.82	74.00	-26.18	Peak	Vertical
	12456.30	35.95	5.16	41.11	54.00	-12.89	Average	Vertical
	12456.30	44.40	5.16	49.56	74.00	-24.44	Peak	Vertical
*	13836.70	45.41	4.94	50.35	68.20	-17.85	Peak	Vertical

Note 1: "*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-05	Test Mode	802.11ac-VHT80 - Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11143.90	39.09	5.49	44.58	74.00	-29.42	Peak	Horizontal
	12194.50	41.53	4.85	46.38	74.00	-27.62	Peak	Horizontal
*	12798.00	44.42	5.56	49.98	68.20	-18.22	Peak	Horizontal
*	14686.70	46.18	5.65	51.83	68.20	-16.37	Peak	Horizontal
*	10479.20	41.21	6.20	47.41	68.20	-20.79	Peak	Vertical
	11109.90	39.22	5.56	44.78	74.00	-29.22	Peak	Vertical
	11560.40	32.77	5.31	38.08	54.00	-15.92	Average	Vertical
	11560.40	43.89	5.31	49.20	74.00	-24.80	Peak	Vertical
*	14606.80	46.14	5.74	51.88	68.20	-16.32	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-06	Test Mode	802.11ac-VHT160 - Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9663.20	40.96	6.63	47.59	68.20	-20.61	Peak	Horizontal
	11036.80	39.33	5.51	44.84	74.00	-29.16	Peak	Horizontal
	11914.00	40.33	5.33	45.66	74.00	-28.34	Peak	Horizontal
*	13981.20	46.07	5.64	51.71	68.20	-16.49	Peak	Horizontal
*	10339.80	41.65	6.13	47.78	68.20	-20.42	Peak	Vertical
	11206.80	40.07	5.45	45.52	74.00	-28.48	Peak	Vertical
	12097.60	40.55	5.15	45.70	74.00	-28.30	Peak	Vertical
*	12842.20	45.07	5.48	50.55	68.20	-17.65	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-06	Test Mode	802.11ac-VHT160-Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9996.40	41.52	6.61	48.13	68.20	-20.07	Peak	Horizontal
	10996.00	39.24	5.25	44.49	74.00	-29.51	Peak	Horizontal
	12051.70	40.25	5.23	45.48	74.00	-28.52	Peak	Horizontal
*	14761.50	46.28	5.71	51.99	68.20	-16.21	Peak	Horizontal
*	9812.80	40.38	6.95	47.33	68.20	-20.87	Peak	Vertical
	11036.80	39.07	5.51	44.58	74.00	-29.42	Peak	Vertical
	11959.90	40.37	5.20	45.57	74.00	-28.43	Peak	Vertical
*	14770.00	45.97	5.57	51.54	68.20	-16.66	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-06	Test Mode	802.11ax-HE20 - Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10103.50	41.92	6.36	48.28	68.20	-19.92	Peak	Horizontal
	10911.00	39.98	5.53	45.51	74.00	-28.49	Peak	Horizontal
	12005.80	40.67	5.22	45.89	74.00	-28.11	Peak	Horizontal
*	16779.40	48.17	3.92	52.09	68.20	-16.11	Peak	Horizontal
*	10399.30	41.66	6.14	47.80	68.20	-20.40	Peak	Vertical
	11036.80	39.54	5.51	45.05	74.00	-28.95	Peak	Vertical
	11733.80	40.63	5.10	45.73	74.00	-28.27	Peak	Vertical
*	14503.10	46.54	5.58	52.12	68.20	-16.08	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-06	Test Mode	802.11ax-HE20 - Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10333.00	41.09	6.17	47.26	68.20	-20.94	Peak	Horizontal
	10996.00	38.71	5.25	43.96	74.00	-30.04	Peak	Horizontal
	11778.00	39.69	4.99	44.68	74.00	-29.32	Peak	Horizontal
*	14793.80	46.19	5.74	51.93	68.20	-16.27	Peak	Horizontal
*	9687.00	41.02	6.65	47.67	68.20	-20.53	Peak	Vertical
	11293.50	39.56	5.68	45.24	74.00	-28.76	Peak	Vertical
	12284.60	41.47	5.05	46.52	74.00	-27.48	Peak	Vertical
*	14533.70	45.38	5.83	51.21	68.20	-16.99	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-06	Test Mode	802.11ax-HE20 - Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10183.40	40.81	6.54	47.35	68.20	-20.85	Peak	Horizontal
	10705.30	39.08	5.90	44.98	74.00	-29.02	Peak	Horizontal
	12051.70	40.44	5.23	45.67	74.00	-28.33	Peak	Horizontal
*	12815.00	44.84	5.53	50.37	68.20	-17.83	Peak	Horizontal
	10953.50	39.62	5.49	45.11	74.00	-28.89	Peak	Vertical
	12051.70	40.46	5.23	45.69	74.00	-28.31	Peak	Vertical
*	14861.80	46.31	5.66	51.97	68.20	-16.23	Peak	Vertical
*	16691.00	47.14	4.45	51.59	68.20	-16.61	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-06	Test Mode	802.11ax-HE20 - Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10486.00	41.24	6.10	47.34	68.20	-20.86	Peak	Horizontal
	11036.80	39.80	5.51	45.31	74.00	-28.69	Peak	Horizontal
	12051.70	40.76	5.23	45.99	74.00	-28.01	Peak	Horizontal
*	16432.60	46.96	5.32	52.28	68.20	-15.92	Peak	Horizontal
*	10421.40	41.57	6.13	47.70	68.20	-20.50	Peak	Vertical
	11466.90	39.88	5.45	45.33	74.00	-28.67	Peak	Vertical
	12379.80	41.33	4.76	46.09	74.00	-27.91	Peak	Vertical
*	15242.60	45.67	5.81	51.48	68.20	-16.72	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-06	Test Mode	802.11ax-HE20 - Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10105.20	41.40	6.36	47.76	68.20	-20.44	Peak	Horizontal
	10953.50	39.45	5.49	44.94	74.00	-29.06	Peak	Horizontal
	12145.20	41.85	5.05	46.90	74.00	-27.10	Peak	Horizontal
*	15108.30	45.64	5.86	51.50	68.20	-16.70	Peak	Horizontal
*	9809.40	40.28	6.85	47.13	68.20	-21.07	Peak	Vertical
	11079.30	39.23	5.49	44.72	74.00	-29.28	Peak	Vertical
	12191.10	41.38	4.86	46.24	74.00	-27.76	Peak	Vertical
*	14744.50	45.94	6.01	51.95	68.20	-16.25	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-06	Test Mode	802.11ax-HE20 - Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11293.50	38.93	5.68	44.61	74.00	-29.39	Peak	Horizontal
	12145.20	40.29	5.05	45.34	74.00	-28.66	Peak	Horizontal
*	12837.10	44.42	5.43	49.85	68.20	-18.35	Peak	Horizontal
*	14008.40	45.92	5.59	51.51	68.20	-16.69	Peak	Horizontal
*	10169.80	41.11	6.41	47.52	68.20	-20.68	Peak	Vertical
	10953.50	39.36	5.49	44.85	74.00	-29.15	Peak	Vertical
	11959.90	40.28	5.20	45.48	74.00	-28.52	Peak	Vertical
*	14115.50	45.43	5.68	51.11	68.20	-17.09	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-06	Test Mode	802.11ax-HE20 - Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9748.20	40.25	6.81	47.06	68.20	-21.14	Peak	Horizontal
	11121.80	38.34	5.62	43.96	74.00	-30.04	Peak	Horizontal
	11823.90	39.63	4.92	44.55	74.00	-29.45	Peak	Horizontal
*	12917.00	44.02	5.59	49.61	68.20	-18.59	Peak	Horizontal
*	9828.10	40.93	6.79	47.72	68.20	-20.48	Peak	Vertical
	11121.80	39.92	5.62	45.54	74.00	-28.46	Peak	Vertical
	12332.20	41.37	4.79	46.16	74.00	-27.84	Peak	Vertical
*	14725.80	45.76	5.71	51.47	68.20	-16.73	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-06	Test Mode	802.11ax-HE20 - Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10290.50	41.46	6.13	47.59	68.20	-20.61	Peak	Horizontal
	11206.80	39.33	5.45	44.78	74.00	-29.22	Peak	Horizontal
	12379.80	41.25	4.76	46.01	74.00	-27.99	Peak	Horizontal
*	14656.10	45.37	5.91	51.28	68.20	-16.92	Peak	Horizontal
*	10288.80	41.06	6.15	47.21	68.20	-20.99	Peak	Vertical
	11036.80	38.95	5.51	44.46	74.00	-29.54	Peak	Vertical
	11959.90	40.73	5.20	45.93	74.00	-28.07	Peak	Vertical
*	14552.40	46.18	6.02	52.20	68.20	-16.00	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11ax-HE20 - Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	10827.70	39.44	5.53	44.97	74.00	-29.03	Peak	Horizontal
	11778.00	39.75	4.99	44.74	74.00	-29.26	Peak	Horizontal
*	15249.40	45.40	5.81	51.21	68.20	-16.99	Peak	Horizontal
*	17267.30	48.40	2.97	51.37	68.20	-16.83	Peak	Horizontal
*	9819.60	40.66	6.96	47.62	68.20	-20.58	Peak	Vertical
	11206.80	38.83	5.45	44.28	74.00	-29.72	Peak	Vertical
	12097.60	40.65	5.15	45.80	74.00	-28.20	Peak	Vertical
*	14742.80	44.63	6.02	50.65	68.20	-17.55	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11ax-HE20 - Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10212.30	40.61	6.59	47.20	68.20	-21.00	Peak	Horizontal
	11206.80	39.67	5.45	45.12	74.00	-28.88	Peak	Horizontal
	12051.70	40.82	5.23	46.05	74.00	-27.95	Peak	Horizontal
*	14540.50	45.97	5.87	51.84	68.20	-16.36	Peak	Horizontal
	10996.00	39.77	5.25	45.02	74.00	-28.98	Peak	Vertical
	11778.00	39.63	4.99	44.62	74.00	-29.38	Peak	Vertical
*	12791.20	44.46	5.56	50.02	68.20	-18.18	Peak	Vertical
*	14365.40	45.24	5.75	50.99	68.20	-17.21	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11ax-HE20 - Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9739.70	40.83	6.81	47.64	68.20	-20.56	Peak	Horizontal
	11483.90	34.50	5.42	39.92	54.00	-14.08	Average	Horizontal
	11483.90	43.42	5.42	48.84	74.00	-25.16	Peak	Horizontal
	12384.90	41.47	4.77	46.24	74.00	-27.76	Peak	Horizontal
*	12911.90	44.37	5.49	49.86	68.20	-18.34	Peak	Horizontal
*	10137.50	40.55	6.40	46.95	68.20	-21.25	Peak	Vertical
	11495.80	36.76	5.52	42.28	54.00	-11.72	Average	Vertical
	11495.80	44.57	5.52	50.09	74.00	-23.91	Peak	Vertical
	12007.50	39.43	5.21	44.64	74.00	-29.36	Peak	Vertical
*	12883.00	44.19	5.14	49.33	68.20	-18.87	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11ax-HE20 - Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10166.40	41.27	6.41	47.68	68.20	-20.52	Peak	Horizontal
	10953.50	39.84	5.49	45.33	74.00	-28.67	Peak	Horizontal
	12097.60	41.33	5.15	46.48	74.00	-27.52	Peak	Horizontal
*	17534.20	49.01	3.64	52.65	68.20	-15.55	Peak	Horizontal
*	9768.60	41.12	6.49	47.61	68.20	-20.59	Peak	Vertical
	10786.90	39.94	5.73	45.67	74.00	-28.33	Peak	Vertical
	12145.20	40.78	5.05	45.83	74.00	-28.17	Peak	Vertical
*	14312.70	45.37	5.80	51.17	68.20	-17.03	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11ax-HE20 - Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10205.50	40.43	6.69	47.12	68.20	-21.08	Peak	Horizontal
	10996.00	39.87	5.25	45.12	74.00	-28.88	Peak	Horizontal
	12145.20	41.35	5.05	46.40	74.00	-27.60	Peak	Horizontal
*	14931.50	45.37	5.80	51.17	68.20	-17.03	Peak	Horizontal
	11424.40	40.02	5.63	45.65	74.00	-28.35	Peak	Vertical
	12332.20	41.32	4.79	46.11	74.00	-27.89	Peak	Vertical
*	12906.80	44.77	5.39	50.16	68.20	-18.04	Peak	Vertical
*	14980.80	46.15	5.85	52.00	68.20	-16.20	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11ax-HE40 - Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11293.50	39.10	5.68	44.78	74.00	-29.22	Peak	Horizontal
	12427.40	41.03	4.93	45.96	74.00	-28.04	Peak	Horizontal
*	14605.10	45.42	5.74	51.16	68.20	-17.04	Peak	Horizontal
*	17114.30	48.06	3.48	51.54	68.20	-16.66	Peak	Horizontal
	11251.00	38.57	5.77	44.34	74.00	-29.66	Peak	Vertical
	12284.60	40.90	5.05	45.95	74.00	-28.05	Peak	Vertical
*	12920.40	45.31	5.61	50.92	68.20	-17.28	Peak	Vertical
*	16714.80	47.65	4.41	52.06	68.20	-16.14	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11ax-HE40 - Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11036.80	39.77	5.51	45.28	74.00	-28.72	Peak	Horizontal
	11959.90	40.52	5.20	45.72	74.00	-28.28	Peak	Horizontal
*	12758.90	43.96	5.50	49.46	68.20	-18.74	Peak	Horizontal
*	14849.90	45.68	5.77	51.45	68.20	-16.75	Peak	Horizontal
	10911.00	39.40	5.53	44.93	74.00	-29.07	Peak	Vertical
	11959.90	40.78	5.20	45.98	74.00	-28.02	Peak	Vertical
*	13151.60	45.67	4.71	50.38	68.20	-17.82	Peak	Vertical
*	15183.10	46.09	5.98	52.07	68.20	-16.13	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11ax-HE40 - Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	10911.00	38.76	5.53	44.29	74.00	-29.71	Peak	Horizontal
	11733.80	41.02	5.10	46.12	74.00	-27.88	Peak	Horizontal
*	12852.40	45.05	5.52	50.57	68.20	-17.63	Peak	Horizontal
*	15273.20	45.68	6.07	51.75	68.20	-16.45	Peak	Horizontal
*	10188.50	40.99	6.63	47.62	68.20	-20.58	Peak	Vertical
	11206.80	40.18	5.45	45.63	74.00	-28.37	Peak	Vertical
	12005.80	40.83	5.22	46.05	74.00	-27.95	Peak	Vertical
*	14713.90	47.10	5.55	52.65	68.20	-15.55	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11ax-HE40 - Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10200.40	41.01	6.67	47.68	68.20	-20.52	Peak	Horizontal
	10870.20	38.64	5.62	44.26	74.00	-29.74	Peak	Horizontal
	11823.90	40.06	4.92	44.98	74.00	-29.02	Peak	Horizontal
*	12891.50	45.21	5.18	50.39	68.20	-17.81	Peak	Horizontal
*	10052.50	41.16	6.49	47.65	68.20	-20.55	Peak	Vertical
	10953.50	38.48	5.49	43.97	74.00	-30.03	Peak	Vertical
	11511.10	40.12	5.61	45.73	74.00	-28.27	Peak	Vertical
*	14379.00	46.24	5.64	51.88	68.20	-16.32	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11ax-HE40 - Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	10996.00	39.25	5.25	44.50	74.00	-29.50	Peak	Horizontal
	11914.00	40.45	5.33	45.78	74.00	-28.22	Peak	Horizontal
*	12787.80	44.45	5.55	50.00	68.20	-18.20	Peak	Horizontal
*	15307.20	46.73	5.90	52.63	68.20	-15.57	Peak	Horizontal
*	10045.70	40.71	6.40	47.11	68.20	-21.09	Peak	Vertical
	11206.80	39.00	5.45	44.45	74.00	-29.55	Peak	Vertical
	12284.60	40.50	5.05	45.55	74.00	-28.45	Peak	Vertical
*	14577.90	45.55	5.71	51.26	68.20	-16.94	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11ax-HE40 - Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11036.80	41.05	5.51	46.56	74.00	-27.44	Peak	Horizontal
	12005.80	40.89	5.22	46.11	74.00	-27.89	Peak	Horizontal
*	12784.40	45.26	5.51	50.77	68.20	-17.43	Peak	Horizontal
*	14747.90	46.35	5.95	52.30	68.20	-15.90	Peak	Horizontal
	10911.00	39.51	5.53	45.04	74.00	-28.96	Peak	Vertical
	11914.00	41.13	5.33	46.46	74.00	-27.54	Peak	Vertical
*	13234.90	45.95	5.06	51.01	68.20	-17.19	Peak	Vertical
*	14569.40	46.87	5.77	52.64	68.20	-15.56	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11ax-HE40 - Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10181.70	41.11	6.52	47.63	68.20	-20.57	Peak	Horizontal
	11206.80	39.96	5.45	45.41	74.00	-28.59	Peak	Horizontal
	12238.70	41.89	5.03	46.92	74.00	-27.08	Peak	Horizontal
*	14790.40	46.51	5.68	52.19	68.20	-16.01	Peak	Horizontal
	10996.00	40.22	5.25	45.47	74.00	-28.53	Peak	Vertical
	11869.80	40.99	5.10	46.09	74.00	-27.91	Peak	Vertical
*	12871.10	44.62	5.31	49.93	68.20	-18.27	Peak	Vertical
*	14996.10	45.82	6.04	51.86	68.20	-16.34	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11ax-HE40 - Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10431.60	41.85	6.08	47.93	68.20	-20.27	Peak	Horizontal
	11121.80	40.01	5.62	45.63	74.00	-28.37	Peak	Horizontal
	11823.90	41.22	4.92	46.14	74.00	-27.86	Peak	Horizontal
*	14737.70	46.97	5.93	52.90	68.20	-15.30	Peak	Horizontal
	10827.70	39.42	5.53	44.95	74.00	-29.05	Peak	Vertical
	11869.80	41.47	5.10	46.57	74.00	-27.43	Peak	Vertical
*	12925.50	44.77	5.52	50.29	68.20	-17.91	Peak	Vertical
*	15242.60	45.87	5.81	51.68	68.20	-16.52	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11ax-HE40 - Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10261.60	41.24	6.12	47.36	68.20	-20.84	Peak	Horizontal
	11075.90	39.76	5.49	45.25	74.00	-28.75	Peak	Horizontal
	11511.10	33.10	5.61	38.71	54.00	-15.29	Average	Horizontal
	11511.10	43.46	5.61	49.07	74.00	-24.93	Peak	Horizontal
*	14441.90	45.20	5.80	51.00	68.20	-17.20	Peak	Horizontal
	10904.20	38.97	5.59	44.56	74.00	-29.44	Peak	Vertical
	11509.40	35.14	5.63	40.77	54.00	-13.23	Average	Vertical
	11509.40	43.44	5.63	49.07	74.00	-24.93	Peak	Vertical
*	12796.30	43.82	5.56	49.38	68.20	-18.82	Peak	Vertical
*	14883.90	46.15	5.73	51.88	68.20	-16.32	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11ax-HE40 - Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9838.30	40.99	6.62	47.61	68.20	-20.59	Peak	Horizontal
	11380.20	39.32	5.59	44.91	74.00	-29.09	Peak	Horizontal
	12379.80	40.27	4.76	45.03	74.00	-28.97	Peak	Horizontal
*	14838.00	46.47	5.75	52.22	68.20	-15.98	Peak	Horizontal
*	9726.10	40.64	6.75	47.39	68.20	-20.81	Peak	Vertical
	11036.80	39.69	5.51	45.20	74.00	-28.80	Peak	Vertical
	11959.90	40.20	5.20	45.40	74.00	-28.60	Peak	Vertical
*	12825.20	44.50	5.45	49.95	68.20	-18.25	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11ax-HE80 - Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	10953.50	39.21	5.49	44.70	74.00	-29.30	Peak	Horizontal
	12191.10	41.08	4.86	45.94	74.00	-28.06	Peak	Horizontal
*	13194.10	44.70	5.40	50.10	68.20	-18.10	Peak	Horizontal
*	17576.70	48.20	3.94	52.14	68.20	-16.06	Peak	Horizontal
	10746.10	39.01	5.86	44.87	74.00	-29.13	Peak	Vertical
	11733.80	39.88	5.10	44.98	74.00	-29.02	Peak	Vertical
*	12735.10	43.81	5.54	49.35	68.20	-18.85	Peak	Vertical
*	15116.80	45.64	5.83	51.47	68.20	-16.73	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11ax-HE80 - Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11079.30	39.96	5.49	45.45	74.00	-28.55	Peak	Horizontal
	12284.60	41.80	5.05	46.85	74.00	-27.15	Peak	Horizontal
*	13887.7	45.02	5.09	50.11	68.20	-18.09	Peak	Horizontal
*	16867.80	48.03	3.76	51.79	68.20	-16.41	Peak	Horizontal
	10870.20	39.16	5.62	44.78	74.00	-29.22	Peak	Vertical
	11914.00	40.26	5.33	45.59	74.00	-28.41	Peak	Vertical
*	12799.70	44.40	5.56	49.96	68.20	-18.24	Peak	Vertical
*	14649.30	45.78	5.97	51.75	68.20	-16.45	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11ax-HE80 - Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11293.50	39.65	5.68	45.33	74.00	-28.67	Peak	Horizontal
	11959.90	40.67	5.20	45.87	74.00	-28.13	Peak	Horizontal
*	13449.10	45.56	4.71	50.27	68.20	-17.93	Peak	Horizontal
*	14931.50	45.51	5.80	51.31	68.20	-16.89	Peak	Horizontal
*	9838.30	41.46	6.62	48.08	68.20	-20.12	Peak	Vertical
	10827.70	39.09	5.53	44.62	74.00	-29.38	Peak	Vertical
	11733.80	40.14	5.10	45.24	74.00	-28.76	Peak	Vertical
*	12714.70	45.11	5.60	50.71	68.20	-17.49	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11ax-HE80 - Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11466.90	39.90	5.45	45.35	74.00	-28.65	Peak	Horizontal
	12145.20	41.21	5.05	46.26	74.00	-27.74	Peak	Horizontal
*	12840.50	44.99	5.46	50.45	68.20	-17.75	Peak	Horizontal
*	14696.90	46.06	5.56	51.62	68.20	-16.58	Peak	Horizontal
	11337.70	39.44	5.64	45.08	74.00	-28.92	Peak	Vertical
	12332.20	40.97	4.79	45.76	74.00	-28.24	Peak	Vertical
*	13064.90	45.19	4.96	50.15	68.20	-18.05	Peak	Vertical
*	14618.70	46.19	5.73	51.92	68.20	-16.28	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11ax-HE80 - Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10146.00	40.93	6.37	47.30	68.20	-20.90	Peak	Horizontal
	10911.00	39.82	5.53	45.35	74.00	-28.65	Peak	Horizontal
	11689.60	39.60	5.22	44.82	74.00	-29.18	Peak	Horizontal
*	12786.10	44.44	5.53	49.97	68.20	-18.23	Peak	Horizontal
	11079.30	39.66	5.49	45.15	74.00	-28.85	Peak	Vertical
	12191.10	41.56	4.86	46.42	74.00	-27.58	Peak	Vertical
*	12832.00	44.66	5.41	50.07	68.20	-18.13	Peak	Vertical
*	15286.80	46.23	6.04	52.27	68.20	-15.93	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11ax-HE80 - Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10054.20	41.13	6.51	47.64	68.20	-20.56	Peak	Horizontal
	11109.90	38.82	5.56	44.38	74.00	-29.62	Peak	Horizontal
	11932.70	40.92	5.06	45.98	74.00	-28.02	Peak	Horizontal
*	12974.80	44.64	5.15	49.79	68.20	-18.41	Peak	Horizontal
*	10523.40	41.05	5.93	46.98	68.20	-21.22	Peak	Vertical
	11521.30	32.83	5.44	38.27	54.00	-15.73	Average	Vertical
	11521.30	43.60	5.44	49.04	74.00	-24.96	Peak	Vertical
	12194.50	40.91	4.85	45.76	74.00	-28.24	Peak	Vertical
*	13597.00	45.31	5.00	50.31	68.20	-17.89	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11ax-HE160 - Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10181.70	41.22	6.52	47.74	68.20	-20.46	Peak	Horizontal
	10945.00	39.58	5.47	45.05	74.00	-28.95	Peak	Horizontal
	12138.40	41.22	5.05	46.27	74.00	-27.73	Peak	Horizontal
*	15069.20	46.02	5.71	51.73	68.20	-16.47	Peak	Horizontal
	11200.00	39.40	5.39	44.79	74.00	-29.21	Peak	Vertical
	12138.40	40.94	5.05	45.99	74.00	-28.01	Peak	Vertical
*	14851.60	45.46	5.75	51.21	68.20	-16.99	Peak	Vertical
*	16738.60	47.26	4.35	51.61	68.20	-16.59	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11ax-HE160 - Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9739.70	40.85	6.81	47.66	68.20	-20.54	Peak	Horizontal
	10820.90	39.66	5.50	45.16	74.00	-28.84	Peak	Horizontal
	11953.10	40.95	5.08	46.03	74.00	-27.97	Peak	Horizontal
*	12775.90	44.95	5.46	50.41	68.20	-17.79	Peak	Horizontal
*	10508.10	42.11	5.85	47.96	68.20	-20.24	Peak	Vertical
	11115.00	39.35	5.60	44.95	74.00	-29.05	Peak	Vertical
	12138.40	40.88	5.05	45.93	74.00	-28.07	Peak	Vertical
*	14645.90	45.77	6.00	51.77	68.20	-16.43	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT20 - Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10202.10	41.19	6.67	47.86	68.20	-20.34	Peak	Horizontal
	11242.50	39.92	5.78	45.70	74.00	-28.30	Peak	Horizontal
	12420.60	40.42	4.97	45.39	74.00	-28.61	Peak	Horizontal
*	14671.40	45.94	5.82	51.76	68.20	-16.44	Peak	Horizontal
	11030.00	40.17	5.57	45.74	74.00	-28.26	Peak	Vertical
	12138.40	40.79	5.05	45.84	74.00	-28.16	Peak	Vertical
*	12786.10	44.77	5.53	50.30	68.20	-17.90	Peak	Vertical
*	14373.90	46.74	5.70	52.44	68.20	-15.76	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT20 - Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10236.10	42.92	6.44	49.36	68.20	-18.84	Peak	Horizontal
	11072.50	40.28	5.50	45.78	74.00	-28.22	Peak	Horizontal
	11907.20	41.27	5.30	46.57	74.00	-27.43	Peak	Horizontal
*	14581.30	46.65	5.72	52.37	68.20	-15.83	Peak	Horizontal
*	9795.80	40.71	6.49	47.20	68.20	-21.00	Peak	Vertical
	11115.00	39.65	5.60	45.25	74.00	-28.75	Peak	Vertical
	12138.40	40.11	5.05	45.16	74.00	-28.84	Peak	Vertical
*	14343.30	45.79	5.61	51.40	68.20	-16.80	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT20 - Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9981.10	40.99	6.65	47.64	68.20	-20.56	Peak	Horizontal
	11415.90	39.58	5.65	45.23	74.00	-28.77	Peak	Horizontal
	12231.90	41.62	4.99	46.61	74.00	-27.39	Peak	Horizontal
*	16437.70	47.01	5.25	52.26	68.20	-15.94	Peak	Horizontal
	11072.50	39.51	5.50	45.01	74.00	-28.99	Peak	Vertical
	11907.20	40.63	5.30	45.93	74.00	-28.07	Peak	Vertical
*	12798.00	44.66	5.56	50.22	68.20	-17.98	Peak	Vertical
*	14812.50	46.50	5.66	52.16	68.20	-16.04	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT20 - Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	10696.80	39.09	5.81	44.90	74.00	-29.10	Peak	Horizontal
	11771.20	40.93	4.96	45.89	74.00	-28.11	Peak	Horizontal
*	12852.40	44.59	5.52	50.11	68.20	-18.09	Peak	Horizontal
*	15184.80	45.87	5.98	51.85	68.20	-16.35	Peak	Horizontal
*	10372.10	41.56	6.32	47.88	68.20	-20.32	Peak	Vertical
	11415.90	40.93	5.65	46.58	74.00	-27.42	Peak	Vertical
	12138.40	41.18	5.05	46.23	74.00	-27.77	Peak	Vertical
*	14596.60	46.04	5.75	51.79	68.20	-16.41	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT20 - Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9981.10	40.60	6.65	47.25	68.20	-20.95	Peak	Horizontal
	11329.20	40.14	5.68	45.82	74.00	-28.18	Peak	Horizontal
	12277.80	40.97	4.97	45.94	74.00	-28.06	Peak	Horizontal
*	14523.50	45.68	5.84	51.52	68.20	-16.68	Peak	Horizontal
*	10115.40	41.74	6.19	47.93	68.20	-20.27	Peak	Vertical
	11286.70	39.79	5.70	45.49	74.00	-28.51	Peak	Vertical
	12563.40	41.87	5.08	46.95	74.00	-27.05	Peak	Vertical
*	14567.7	45.66	5.81	51.47	68.20	-16.73	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT20 - Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10146.00	41.35	6.37	47.72	68.20	-20.48	Peak	Horizontal
	11072.50	39.43	5.50	44.93	74.00	-29.07	Peak	Horizontal
	12277.80	41.17	4.97	46.14	74.00	-27.86	Peak	Horizontal
*	15149.10	46.24	5.74	51.98	68.20	-16.22	Peak	Horizontal
*	10159.60	41.19	6.34	47.53	68.20	-20.67	Peak	Vertical
	11157.50	39.40	5.61	45.01	74.00	-28.99	Peak	Vertical
	12184.30	41.63	4.91	46.54	74.00	-27.46	Peak	Vertical
*	14863.50	46.14	5.65	51.79	68.20	-16.41	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT20 - Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9804.30	41.34	6.70	48.04	68.20	-20.16	Peak	Horizontal
	11286.70	39.59	5.70	45.29	74.00	-28.71	Peak	Horizontal
	12468.20	41.22	5.03	46.25	74.00	-27.75	Peak	Horizontal
*	15201.80	46.08	5.75	51.83	68.20	-16.37	Peak	Horizontal
*	9809.40	40.32	6.85	47.17	68.20	-21.03	Peak	Vertical
	11592.70	40.34	5.19	45.53	74.00	-28.47	Peak	Vertical
	12563.40	41.51	5.08	46.59	74.00	-27.41	Peak	Vertical
*	14637.40	46.19	5.97	52.16	68.20	-16.04	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT20 - Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	10945.00	40.17	5.47	45.64	74.00	-28.36	Peak	Horizontal
	12090.80	40.64	5.14	45.78	74.00	-28.22	Peak	Horizontal
*	14523.50	46.32	5.84	52.16	68.20	-16.04	Peak	Horizontal
*	17056.50	47.79	3.39	51.18	68.20	-17.02	Peak	Horizontal
*	10181.70	40.67	6.52	47.19	68.20	-21.01	Peak	Vertical
	11200.00	38.75	5.39	44.14	74.00	-29.86	Peak	Vertical
	12138.40	40.53	5.05	45.58	74.00	-28.42	Peak	Vertical
*	15166.10	45.54	5.91	51.45	68.20	-16.75	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT20 - Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	10987.50	39.61	5.27	44.88	74.00	-29.12	Peak	Horizontal
	12563.40	41.35	5.08	46.43	74.00	-27.57	Peak	Horizontal
*	14834.60	46.21	5.72	51.93	68.20	-16.27	Peak	Horizontal
*	17173.80	48.19	3.25	51.44	68.20	-16.76	Peak	Horizontal
*	9996.40	41.60	6.61	48.21	68.20	-19.99	Peak	Vertical
	10987.50	39.63	5.27	44.90	74.00	-29.10	Peak	Vertical
	12231.90	40.85	4.99	45.84	74.00	-28.16	Peak	Vertical
*	14929.8	45.38	5.79	51.16	68.20	-17.04	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT20 - Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10137.50	40.83	6.40	47.23	68.20	-20.97	Peak	Horizontal
	10778.40	39.15	5.65	44.80	74.00	-29.20	Peak	Horizontal
	12138.40	41.09	5.05	46.14	74.00	-27.86	Peak	Horizontal
*	15237.50	45.51	5.82	51.33	68.20	-16.87	Peak	Horizontal
*	10164.70	40.82	6.41	47.23	68.20	-20.97	Peak	Vertical
	11030.00	39.16	5.57	44.73	74.00	-29.27	Peak	Vertical
	12138.40	41.33	5.05	46.38	74.00	-27.62	Peak	Vertical
*	14554.10	45.40	6.04	51.44	68.20	-16.76	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT20 - Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9625.80	40.43	6.65	47.08	68.20	-21.12	Peak	Horizontal
	11494.10	34.76	5.49	40.25	54.00	-13.75	Average	Horizontal
	11494.10	44.07	5.49	49.56	74.00	-24.44	Peak	Horizontal
	12194.50	40.17	4.85	45.02	74.00	-28.98	Peak	Horizontal
*	13580.00	45.30	4.91	50.21	68.20	-17.99	Peak	Horizontal
*	10038.90	39.94	6.31	46.25	68.20	-21.95	Peak	Vertical
	11489.00	37.02	5.42	42.44	54.00	-11.56	Average	Vertical
	11489.00	45.72	5.42	51.14	74.00	-22.86	Peak	Vertical
	12119.70	40.22	5.08	45.30	74.00	-28.70	Peak	Vertical
*	14294.00	45.40	5.70	51.10	68.20	-17.10	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT20 - Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9965.80	41.07	6.44	47.51	68.20	-20.69	Peak	Horizontal
	11200.00	39.90	5.39	45.29	74.00	-28.71	Peak	Horizontal
	12231.90	40.56	4.99	45.55	74.00	-28.45	Peak	Horizontal
*	13534.10	45.60	5.04	50.64	68.20	-17.56	Peak	Horizontal
*	9778.80	41.16	6.46	47.62	68.20	-20.58	Peak	Vertical
	11242.50	39.94	5.78	45.72	74.00	-28.28	Peak	Vertical
	12184.30	41.30	4.91	46.21	74.00	-27.79	Peak	Vertical
*	14450.40	45.94	5.63	51.57	68.20	-16.63	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT20 - Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10210.60	41.46	6.63	48.09	68.20	-20.11	Peak	Horizontal
	11072.50	39.65	5.50	45.15	74.00	-28.85	Peak	Horizontal
	12044.90	40.96	5.21	46.17	74.00	-27.83	Peak	Horizontal
*	14814.20	46.57	5.66	52.23	68.20	-15.97	Peak	Horizontal
*	10064.40	41.52	6.43	47.95	68.20	-20.25	Peak	Vertical
	11200.00	40.51	5.39	45.90	74.00	-28.10	Peak	Vertical
	11953.10	41.10	5.08	46.18	74.00	-27.82	Peak	Vertical
*	13221.30	45.66	5.05	50.71	68.20	-17.49	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT40 - Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10401.00	41.56	6.15	47.71	68.20	-20.49	Peak	Horizontal
	11200.00	40.62	5.39	46.01	74.00	-27.99	Peak	Horizontal
	12044.90	41.14	5.21	46.35	74.00	-27.65	Peak	Horizontal
*	15057.30	45.92	5.76	51.68	68.20	-16.52	Peak	Horizontal
	11286.70	40.19	5.70	45.89	74.00	-28.11	Peak	Vertical
	11999.00	39.95	5.24	45.19	74.00	-28.81	Peak	Vertical
*	12850.70	44.62	5.54	50.16	68.20	-18.04	Peak	Vertical
*	14815.90	45.93	5.66	51.59	68.20	-16.61	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT40 - Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9828.10	41.05	6.79	47.84	68.20	-20.36	Peak	Horizontal
	10820.90	39.57	5.50	45.07	74.00	-28.93	Peak	Horizontal
	11548.50	39.81	5.29	45.10	74.00	-28.90	Peak	Horizontal
*	14758.10	45.49	5.77	51.26	68.20	-16.94	Peak	Horizontal
	11030.00	39.28	5.57	44.85	74.00	-29.15	Peak	Vertical
	12044.90	40.86	5.21	46.07	74.00	-27.93	Peak	Vertical
*	14814.20	46.03	5.66	51.69	68.20	-16.51	Peak	Vertical
*	17046.30	48.51	3.48	51.99	68.20	-16.21	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT40 - Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9814.50	40.70	6.99	47.69	68.20	-20.51	Peak	Horizontal
	11681.10	41.49	5.17	46.66	74.00	-27.34	Peak	Horizontal
	12231.90	42.08	4.99	47.07	74.00	-26.93	Peak	Horizontal
*	14747.90	45.27	5.95	51.22	68.20	-16.98	Peak	Horizontal
	11259.50	39.45	5.56	45.01	74.00	-28.99	Peak	Vertical
	12170.70	41.43	5.02	46.45	74.00	-27.55	Peak	Vertical
*	12825.20	44.97	5.45	50.42	68.20	-17.78	Peak	Vertical
*	14640.80	45.61	6.03	51.64	68.20	-16.56	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT40 - Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10482.60	41.66	6.18	47.84	68.20	-20.36	Peak	Horizontal
	11455.00	40.55	5.40	45.95	74.00	-28.05	Peak	Horizontal
	12308.40	41.51	4.82	46.33	74.00	-27.67	Peak	Horizontal
*	14511.60	46.17	5.68	51.85	68.20	-16.35	Peak	Horizontal
	10907.60	38.82	5.58	44.40	74.00	-29.60	Peak	Vertical
	12031.30	40.44	5.18	45.62	74.00	-28.38	Peak	Vertical
*	14860.10	46.22	5.67	51.89	68.20	-16.31	Peak	Vertical
*	16711.40	47.23	4.42	51.65	68.20	-16.55	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT40 - Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10127.30	41.58	6.18	47.76	68.20	-20.44	Peak	Horizontal
	11196.60	39.15	5.37	44.52	74.00	-29.48	Peak	Horizontal
	12228.50	41.51	4.95	46.46	74.00	-27.54	Peak	Horizontal
*	14736.00	45.47	5.90	51.37	68.20	-16.83	Peak	Horizontal
*	10540.40	41.51	5.90	47.41	68.20	-20.79	Peak	Vertical
	11344.50	39.50	5.62	45.12	74.00	-28.88	Peak	Vertical
	11992.20	41.09	5.20	46.29	74.00	-27.71	Peak	Vertical
*	13891.10	46.75	5.08	51.83	68.20	-16.37	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT40 - Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	9447.30	40.88	6.62	47.50	74.00	-26.50	Peak	Horizontal
	11123.50	38.73	5.62	44.35	74.00	-29.65	Peak	Horizontal
*	12937.4	44.99	5.35	50.34	68.20	-17.86	Peak	Horizontal
*	13918.3	45.97	5.08	51.05	68.20	-17.15	Peak	Horizontal
*	8741.80	40.28	6.68	46.96	68.20	-21.24	Peak	Vertical
	10979.00	38.77	5.20	43.97	74.00	-30.03	Peak	Vertical
	12308.40	41.28	4.82	46.10	74.00	-27.90	Peak	Vertical
*	16617.90	47.16	4.68	51.84	68.20	-16.36	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT40 - Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10278.60	41.07	6.29	47.36	68.20	-20.84	Peak	Horizontal
	11014.70	39.68	5.22	44.90	74.00	-29.10	Peak	Horizontal
	12070.40	40.72	5.16	45.88	74.00	-28.12	Peak	Horizontal
*	15268.10	45.51	6.01	51.52	68.20	-16.68	Peak	Horizontal
	11014.70	39.16	5.22	44.38	74.00	-29.62	Peak	Vertical
	12109.50	40.50	5.13	45.63	74.00	-28.37	Peak	Vertical
*	13479.70	46.03	4.92	50.95	68.20	-17.25	Peak	Vertical
*	14719.00	46.21	5.62	51.83	68.20	-16.37	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT40 - Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	10943.30	39.56	5.47	45.03	74.00	-28.97	Peak	Horizontal
	11835.80	40.64	4.95	45.59	74.00	-28.41	Peak	Horizontal
*	12830.30	44.88	5.42	50.30	68.20	-17.90	Peak	Horizontal
*	14336.50	46.82	5.54	52.36	68.20	-15.84	Peak	Horizontal
*	10382.30	41.29	6.21	47.50	68.20	-20.70	Peak	Vertical
	11269.70	39.82	5.48	45.30	74.00	-28.70	Peak	Vertical
	12349.20	41.02	4.85	45.87	74.00	-28.13	Peak	Vertical
*	14899.20	46.12	5.62	51.74	68.20	-16.46	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT40 - Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10066.10	40.29	6.42	46.71	68.20	-21.49	Peak	Horizontal
	11528.10	33.27	5.35	38.62	54.00	-15.38	Average	Horizontal
	11528.10	43.32	5.35	48.67	74.00	-25.33	Peak	Horizontal
	11970.10	39.57	5.22	44.79	74.00	-29.21	Peak	Horizontal
*	14576.20	46.70	5.71	52.41	68.20	-15.79	Peak	Horizontal
*	9603.70	40.72	6.67	47.39	68.20	-20.81	Peak	Vertical
	11511.10	35.36	5.61	40.97	54.00	-13.03	Average	Vertical
	11511.10	47.69	5.61	53.30	74.00	-20.70	Peak	Vertical
	11932.70	38.84	5.06	43.90	74.00	-30.10	Peak	Vertical
*	14844.80	45.14	5.80	50.94	68.20	-17.26	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT40 - Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10382.30	41.84	6.21	48.05	68.20	-20.15	Peak	Horizontal
	11086.10	39.53	5.51	45.04	74.00	-28.96	Peak	Horizontal
	11621.60	40.78	5.18	45.96	74.00	-28.04	Peak	Horizontal
*	17044.60	48.52	3.48	52.00	68.20	-16.20	Peak	Horizontal
*	9644.50	41.36	6.77	48.13	68.20	-20.07	Peak	Vertical
	11235.70	40.25	5.67	45.92	74.00	-28.08	Peak	Vertical
	12060.20	40.54	5.21	45.75	74.00	-28.25	Peak	Vertical
*	16679.10	47.08	4.40	51.48	68.20	-16.72	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT80 - Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	10717.20	38.75	5.88	44.63	74.00	-29.37	Peak	Horizontal
	11898.70	40.42	5.22	45.64	74.00	-28.36	Peak	Horizontal
*	12799.7	44.73	5.56	50.29	68.20	-17.91	Peak	Horizontal
*	15055.60	46.48	5.77	52.25	68.20	-15.95	Peak	Horizontal
*	9610.50	41.30	6.68	47.98	68.20	-20.22	Peak	Vertical
	11349.60	39.94	5.61	45.55	74.00	-28.45	Peak	Vertical
	12223.40	41.10	4.90	46.00	74.00	-28.00	Peak	Vertical
*	13889.4	45.17	5.09	50.26	68.20	-17.94	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT80 - Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10390.80	41.70	6.16	47.86	68.20	-20.34	Peak	Horizontal
	11273.10	40.02	5.54	45.56	74.00	-28.44	Peak	Horizontal
	12101.00	41.55	5.16	46.71	74.00	-27.29	Peak	Horizontal
*	14778.50	46.63	5.47	52.10	68.20	-16.10	Peak	Horizontal
	10973.90	40.68	5.19	45.87	74.00	-28.13	Peak	Vertical
	12019.40	41.03	5.18	46.21	74.00	-27.79	Peak	Vertical
*	12962.90	45.22	5.24	50.46	68.20	-17.74	Peak	Vertical
*	14729.20	45.82	5.78	51.60	68.20	-16.60	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT80 - Channel 106
Remark	3. Average measurement was not performed if peak level lower than average limit. 4. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	10717.20	39.39	5.88	45.27	74.00	-28.73	Peak	Horizontal
	11699.80	40.37	5.31	45.68	74.00	-28.32	Peak	Horizontal
*	12781.00	44.43	5.48	49.91	68.20	-18.29	Peak	Horizontal
*	15286.80	46.17	6.04	52.21	68.20	-15.99	Peak	Horizontal
*	10214.00	40.90	6.55	47.45	68.20	-20.75	Peak	Vertical
	11048.70	39.79	5.48	45.27	74.00	-28.73	Peak	Vertical
	12182.60	41.37	4.92	46.29	74.00	-27.71	Peak	Vertical
*	14608.50	46.77	5.74	52.51	68.20	-15.69	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT80 - Channel 122
Remark	5. Average measurement was not performed if peak level lower than average limit. 6. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	10610.10	38.50	5.91	44.41	74.00	-29.59	Peak	Horizontal
	11699.80	40.43	5.31	45.74	74.00	-28.26	Peak	Horizontal
*	12849.00	44.72	5.53	50.25	68.20	-17.95	Peak	Horizontal
*	15099.80	46.14	5.93	52.07	68.20	-16.13	Peak	Horizontal
*	10168.10	41.36	6.41	47.77	68.20	-20.43	Peak	Vertical
	11123.50	40.07	5.62	45.69	74.00	-28.31	Peak	Vertical
	12430.80	40.95	4.88	45.83	74.00	-28.17	Peak	Vertical
*	14380.70	46.22	5.62	51.84	68.20	-16.36	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-07	Test Mode	802.11be-EHT80 - Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9732.90	40.93	6.79	47.72	68.20	-20.48	Peak	Horizontal
	11048.70	40.55	5.48	46.03	74.00	-27.97	Peak	Horizontal
	11778.00	41.42	4.99	46.41	74.00	-27.59	Peak	Horizontal
*	14902.60	46.00	5.62	51.62	68.20	-16.58	Peak	Horizontal
*	8694.20	40.01	6.67	46.68	68.20	-21.52	Peak	Vertical
	11198.30	39.32	5.38	44.70	74.00	-29.30	Peak	Vertical
	12141.80	40.83	5.05	45.88	74.00	-28.12	Peak	Vertical
*	14751.30	46.47	5.89	52.36	68.20	-15.84	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-27	Test Mode	802.11be-EHT80 - Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11041.90	38.44	5.46	43.90	74.00	-30.10	Peak	Horizontal
	11784.80	40.25	4.99	45.24	74.00	-28.76	Peak	Horizontal
*	12881.30	44.51	5.16	49.67	68.20	-18.53	Peak	Horizontal
*	14112.10	45.69	5.72	51.41	68.20	-16.79	Peak	Horizontal
*	9976.00	40.44	6.58	47.02	68.20	-21.18	Peak	Vertical
	10972.20	38.36	5.22	43.58	74.00	-30.42	Peak	Vertical
	11550.20	34.16	5.30	39.46	54.00	-14.54	Average	Vertical
	11550.20	45.24	5.30	50.54	74.00	-23.46	Peak	Vertical
*	12719.80	43.87	5.56	49.43	68.20	-18.77	Peak	Vertical
Note 1: " * " is not in restricted band.								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-08	Test Mode	802.11be-EHT160 - Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11271.40	39.03	5.51	44.54	74.00	-29.46	Peak	Horizontal
	12022.80	40.88	5.18	46.06	74.00	-27.94	Peak	Horizontal
*	13503.50	45.40	5.18	50.58	68.20	-17.62	Peak	Horizontal
*	15145.70	45.46	5.73	51.19	68.20	-17.01	Peak	Horizontal
	11120.10	39.21	5.62	44.83	74.00	-29.17	Peak	Vertical
	11900.40	41.20	5.23	46.43	74.00	-27.57	Peak	Vertical
*	12803.10	44.14	5.55	49.69	68.20	-18.51	Peak	Vertical
*	15257.90	46.03	5.85	51.88	68.20	-16.32	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-08-08	Test Mode	802.11be-EHT160-Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11082.70	40.08	5.50	45.58	74.00	-28.42	Peak	Horizontal
	12063.60	41.62	5.20	46.82	74.00	-27.18	Peak	Horizontal
*	14520.10	46.14	5.81	51.95	68.20	-16.25	Peak	Horizontal
*	16442.80	46.39	5.20	51.59	68.20	-16.61	Peak	Horizontal
*	9717.60	41.05	6.70	47.75	68.20	-20.45	Peak	Vertical
	11387.00	39.42	5.57	44.99	74.00	-29.01	Peak	Vertical
	12228.50	41.62	4.95	46.57	74.00	-27.43	Peak	Vertical
*	14455.50	46.39	5.62	52.01	68.20	-16.19	Peak	Vertical


Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1 GHz:

Site	WJ-AC2	Test Date	2025-08-08
Temperature	27.4 °C	Humidity	62.5%
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Bob Zhang
Factor	VULB 9163_07097	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 82.11ac-VHT40 at 5755 MHz		

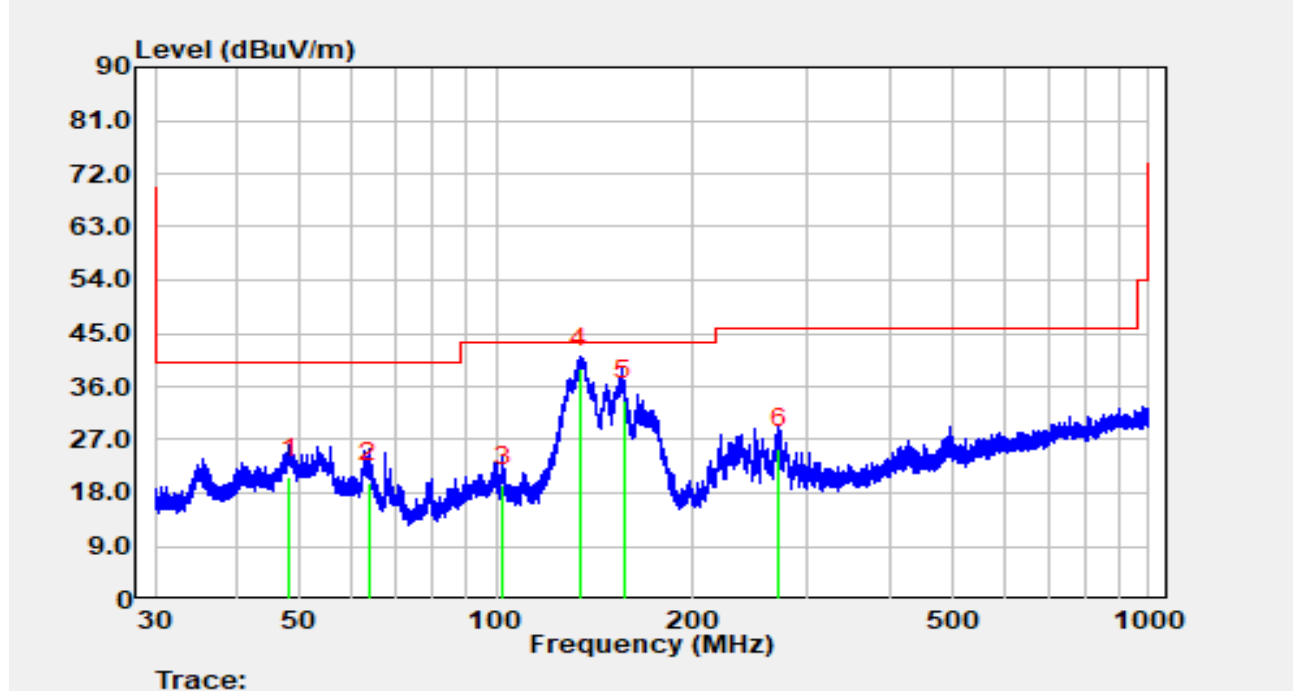


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		48.10	0.60	19.97	20.57	-19.43	40.00	QP
2		63.76	2.30	17.55	19.85	-20.15	40.00	QP
3		102.54	1.20	18.16	19.36	-24.14	43.50	QP
4	*	133.99	24.30	14.76	39.06	-4.44	43.50	QP
5		157.06	18.90	14.80	33.70	-9.80	43.50	QP
6		271.13	6.20	19.37	25.57	-20.43	46.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
- The amplitude of the radiated emissions in the frequency range from 9 kHz to 30 MHz and 18 GHz to 40 GHz is close to the ambient noise level, and all emissions are at least 20 dB below the applicable limit. Therefore, the data is not presented in this report.

Site	WJ-AC2	Test Date	2025-08-08
Temperature	27.4 °C	Humidity	62.5%
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Bob Zhang
Factor	VULB 9163_07097	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 82.11ac-VHT40 at 5755 MHz		

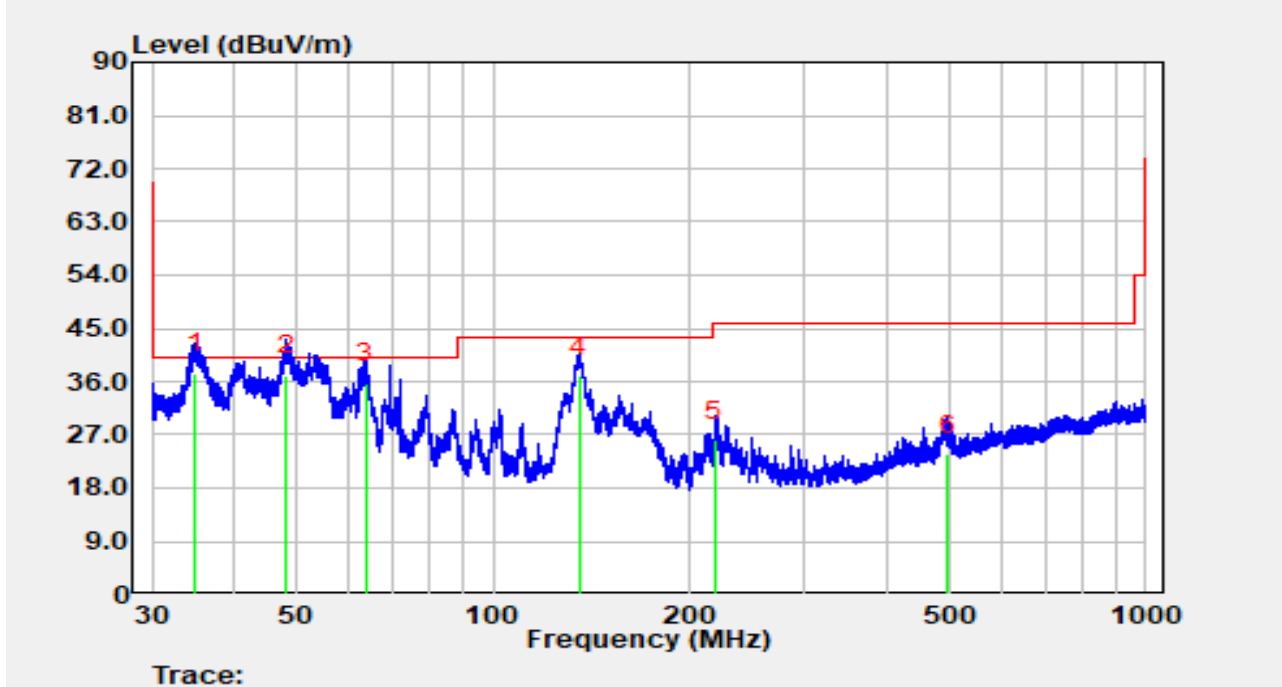

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	34.92	20.60	16.85	37.45	-2.55	40.00	QP
2		48.21	17.20	19.97	37.17	-2.83	40.00	QP
3		63.80	18.20	17.54	35.74	-4.26	40.00	QP
4		135.36	22.20	14.67	36.87	-6.63	43.50	QP
5		218.46	8.20	17.82	26.02	-19.98	46.00	QP
6		497.85	-0.70	24.43	23.73	-22.27	46.00	QP


Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
- The amplitude of the radiated emissions in the frequency range from 9 kHz to 30 MHz and 18 GHz to 40 GHz is close to the ambient noise level, and all emissions are at least 20 dB below the applicable limit. Therefore, the data is not presented in this report.

A.8 Radiated Restricted Band Edge Test Result

Tri-band mode

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5180 MHz		

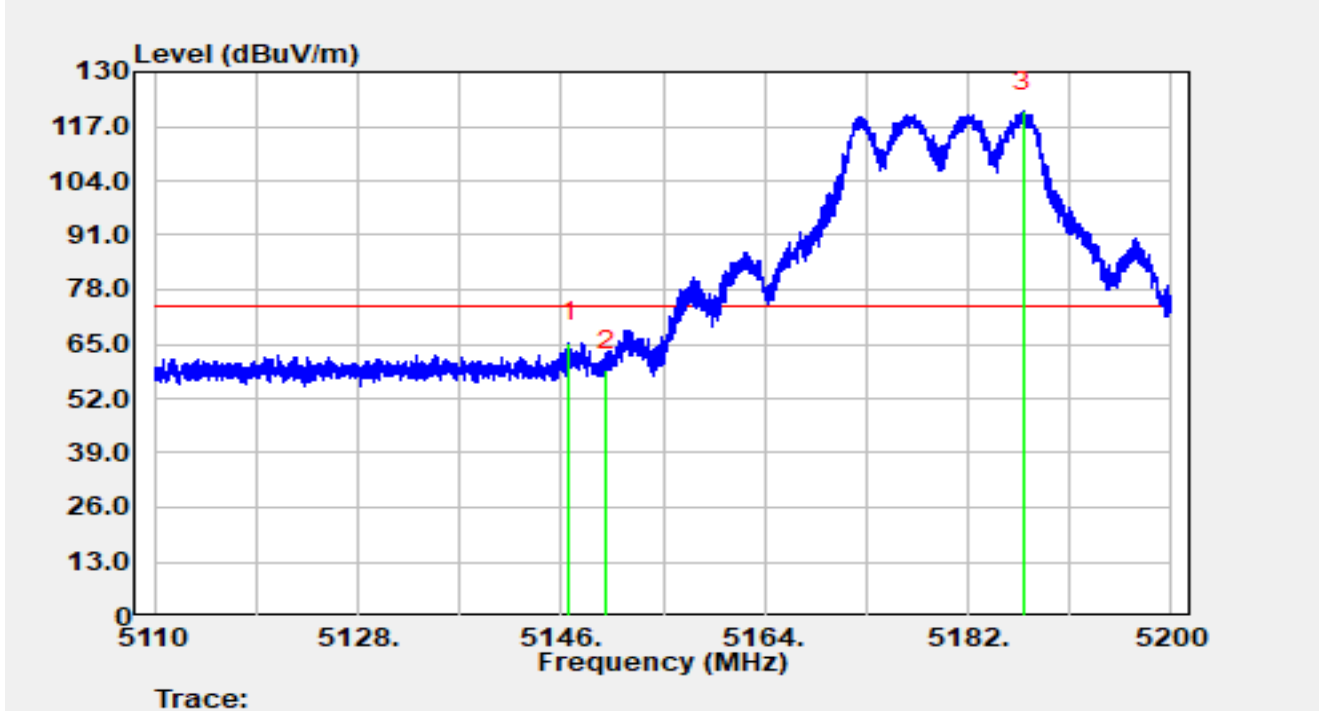


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.68	49.28	15.98	65.26	-8.74	74.00	Peak
2		5150.00	42.85	15.99	58.84	-15.16	74.00	Peak
3		5186.92	104.51	16.00	120.51	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5180 MHz		

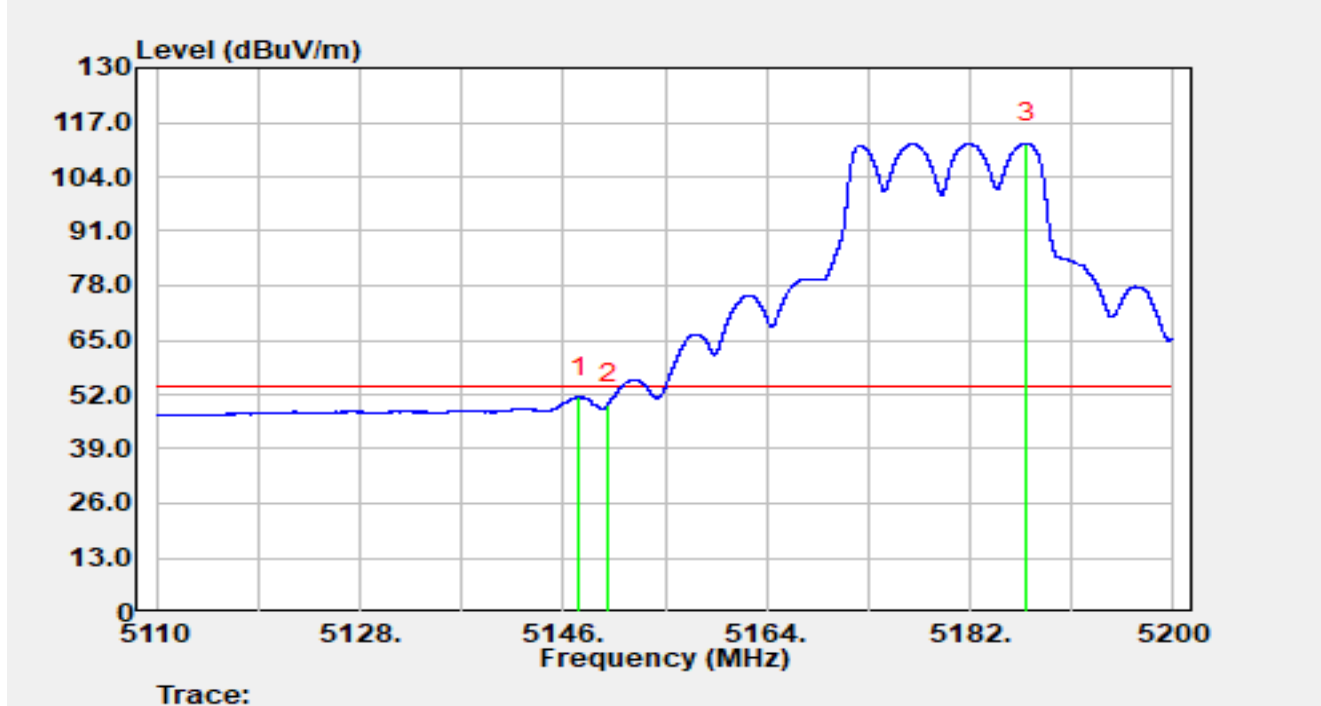


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.45	35.37	15.98	51.36	-2.64	54.00	Average
2		5150.00	33.68	15.99	49.67	-4.33	54.00	Average
3		5186.97	96.01	16.00	112.01	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5180 MHz		

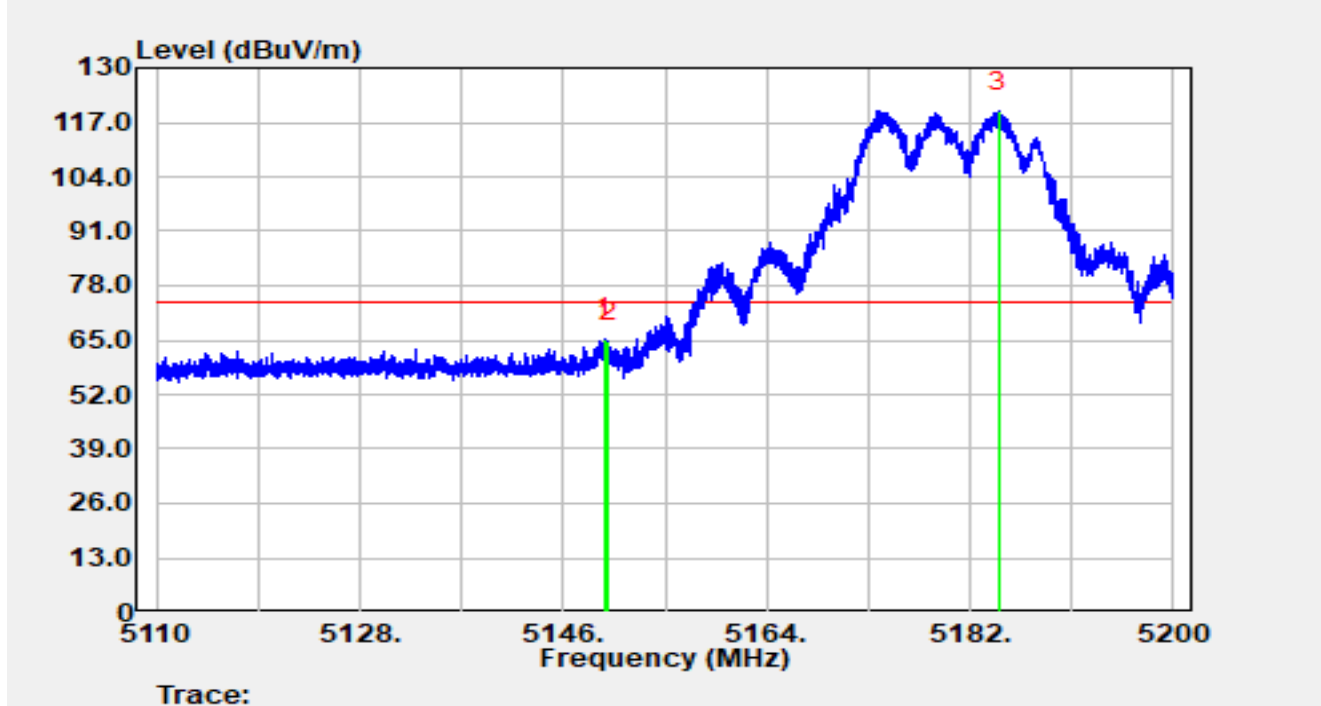


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.65	49.38	15.99	65.37	-8.63	74.00	Peak
2		5150.00	48.60	15.99	64.60	-9.40	74.00	Peak
3		5184.56	103.69	16.00	119.70	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5180 MHz		

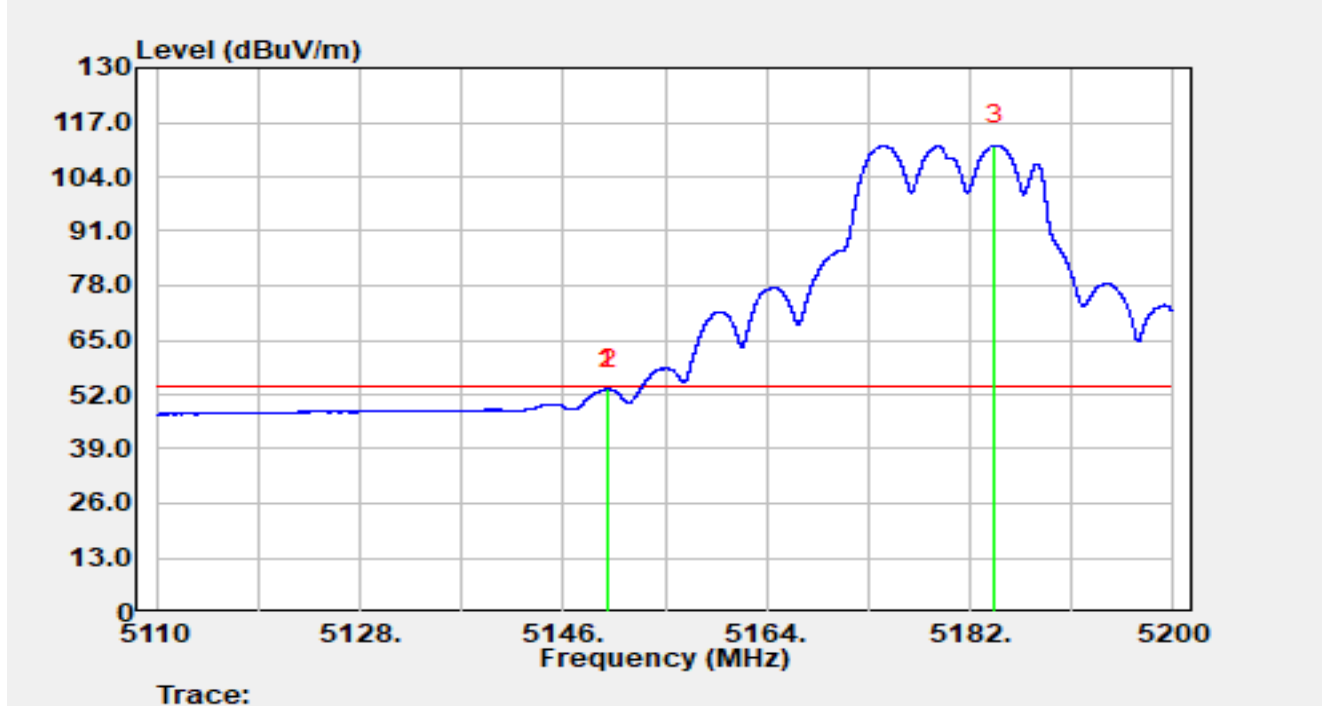


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.83	37.40	15.99	53.39	-0.61	54.00	Average
2		5150.00	37.38	15.99	53.37	-0.63	54.00	Average
3		5184.21	95.57	16.01	111.58	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5320 MHz		

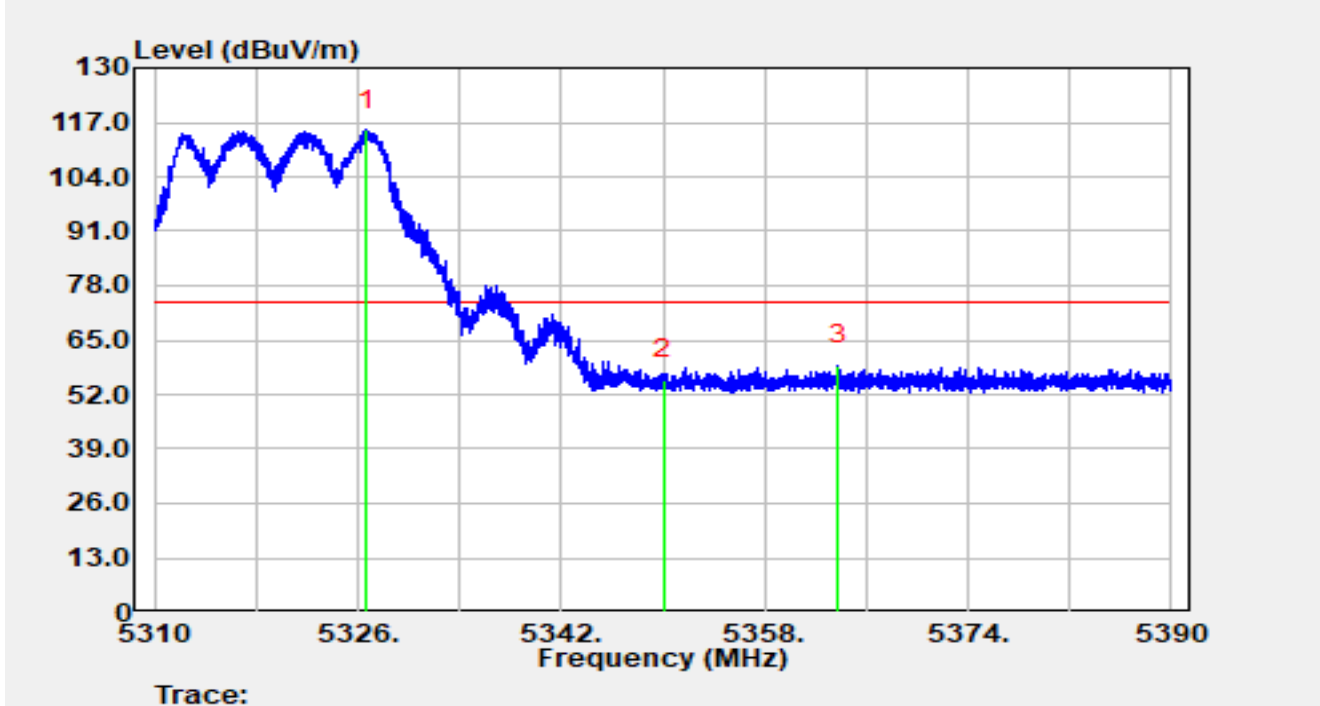


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5326.66	99.32	15.84	115.17	N/A	N/A	Peak
2		5350.00	39.90	15.72	55.63	-18.37	74.00	Peak
3	*	5363.74	43.19	15.85	59.04	-14.96	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5320 MHz		

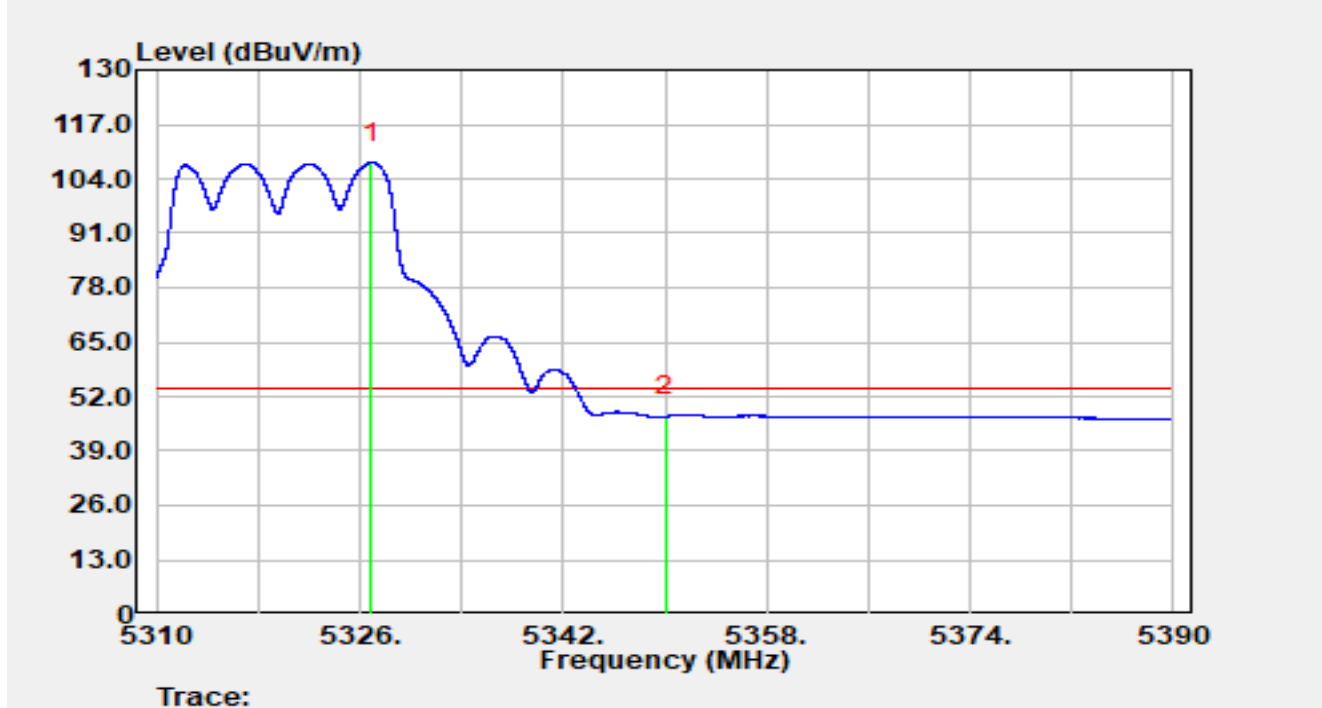


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5326.94	91.93	15.85	107.78	N/A	N/A	Average
2	*	5350.00	31.43	15.72	47.16	-6.84	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5320 MHz		

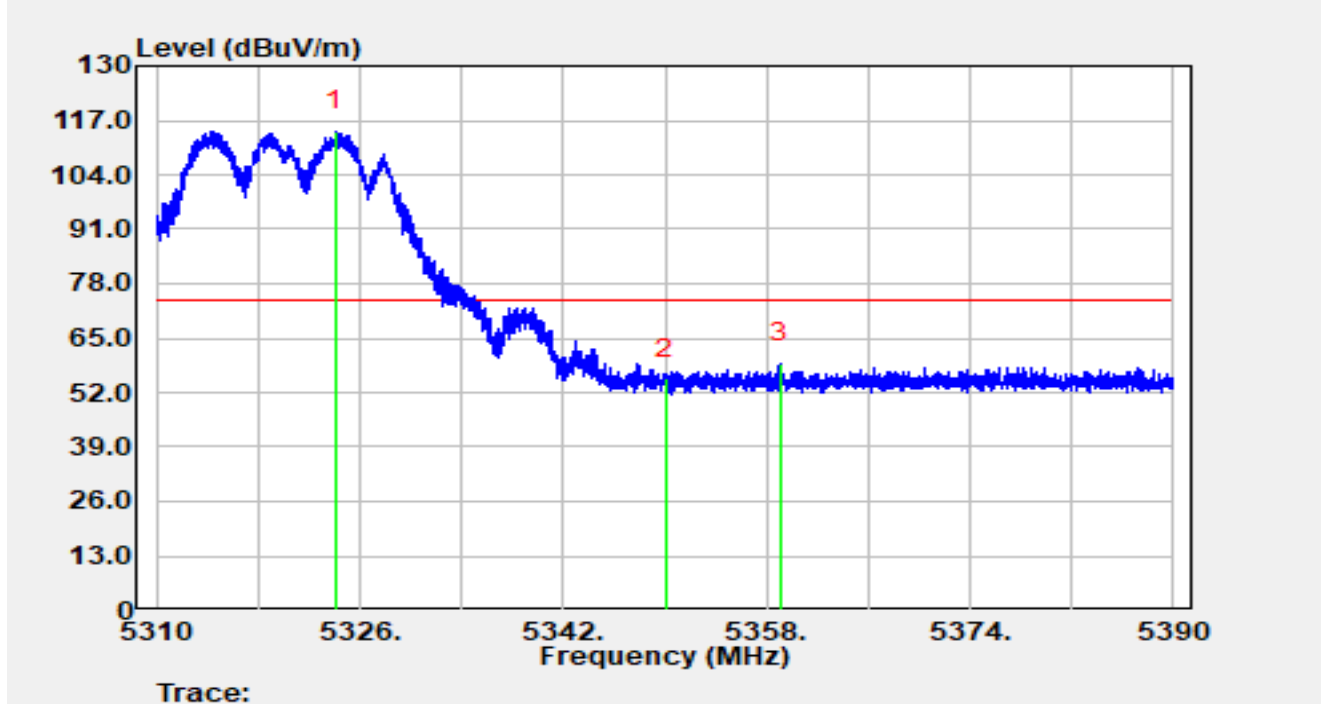


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5324.07	98.52	15.84	114.36	N/A	N/A	Peak
2		5350.00	39.62	15.72	55.35	-18.65	74.00	Peak
3	*	5359.02	43.29	15.80	59.10	-14.90	74.00	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5320 MHz		

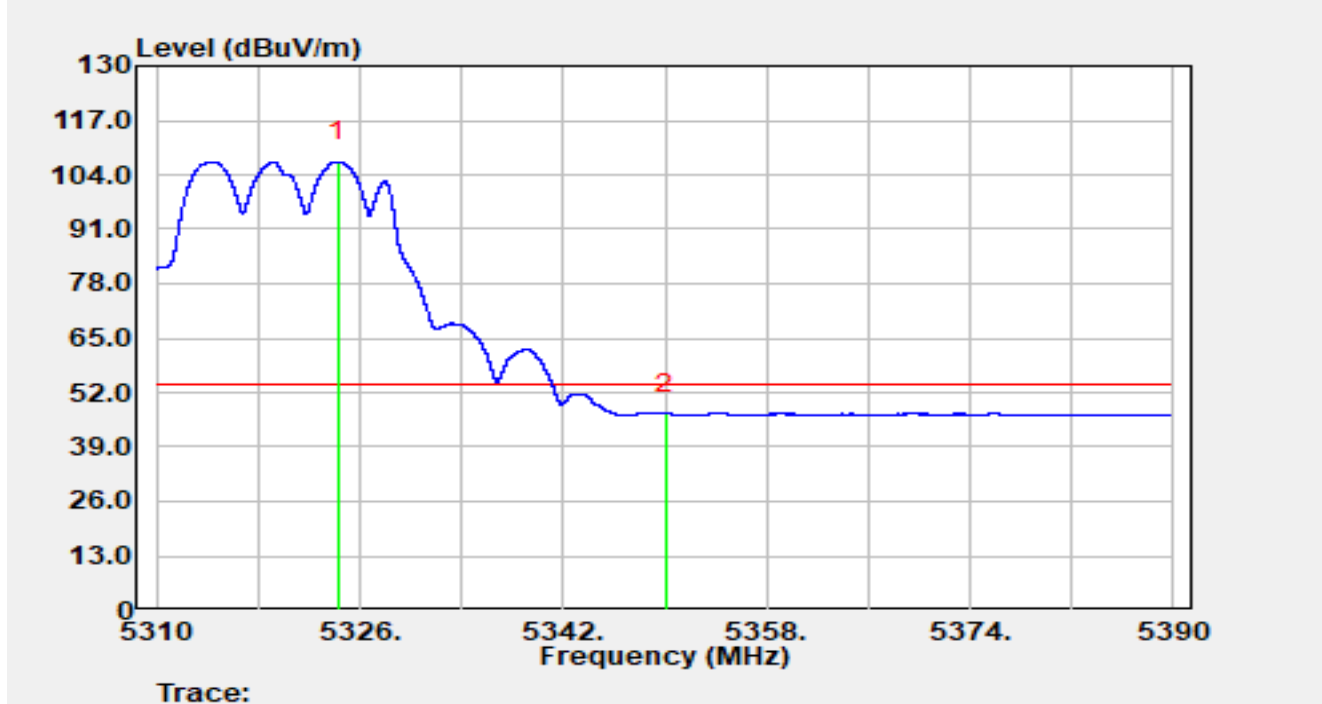


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5324.24	91.32	15.84	107.16	N/A	N/A	Average
2	*	5350.00	31.28	15.72	47.01	-6.99	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5500 MHz		

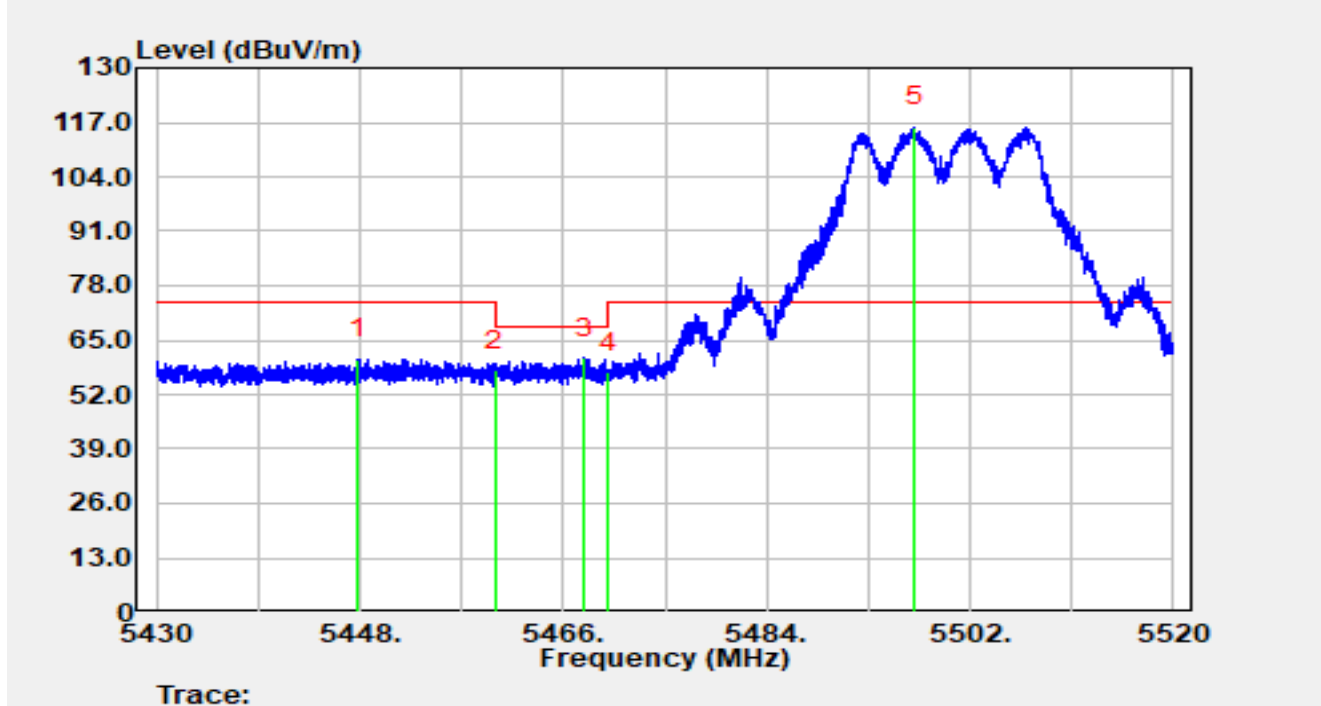


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5447.88	44.42	15.96	60.38	-13.62	74.00	Peak
2		5460.00	41.84	16.00	57.84	-10.36	68.20	Peak
3	*	5467.92	44.79	15.95	60.74	-7.46	68.20	Peak
4		5470.00	41.26	15.97	57.22	-10.98	68.20	Peak
5		5497.07	99.56	16.26	115.82	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5500 MHz		

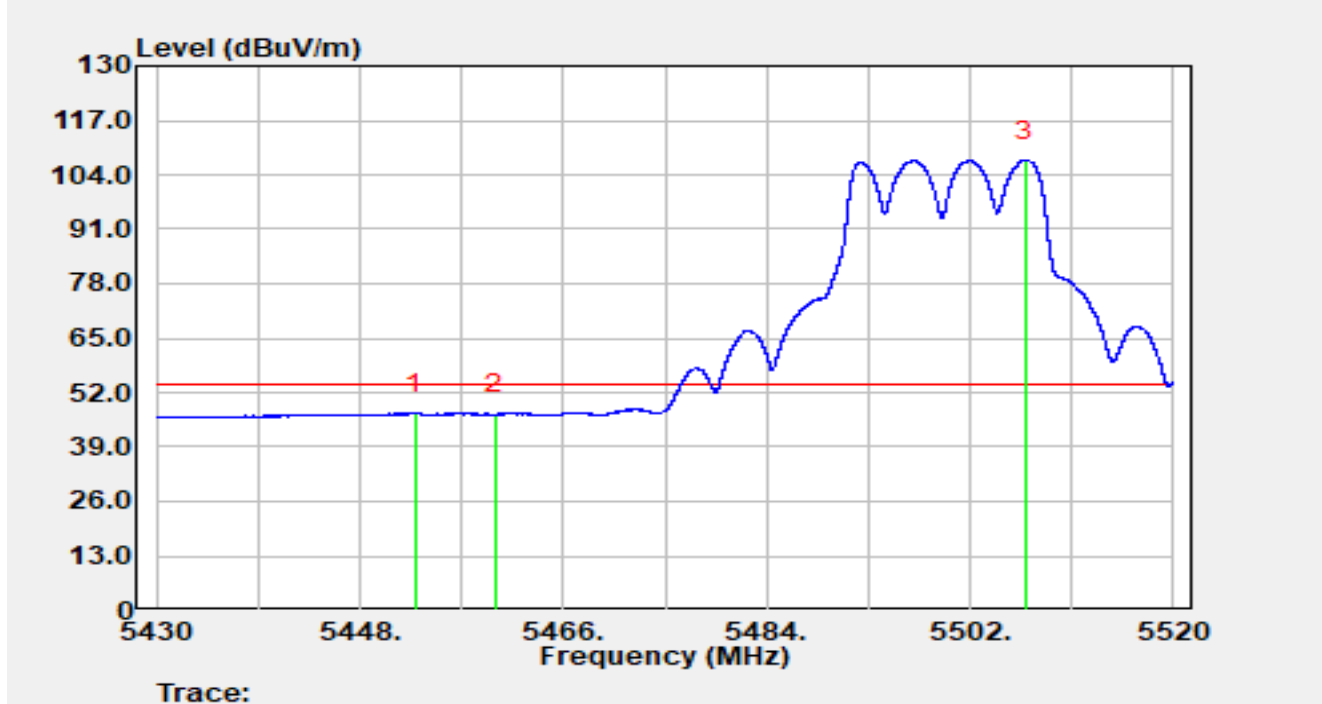


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5452.87	31.04	16.03	47.06	-6.94	54.00	Average
2		5460.00	30.77	16.00	46.77	-7.23	54.00	Average
3		5506.84	91.11	16.30	107.41	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5500 MHz		

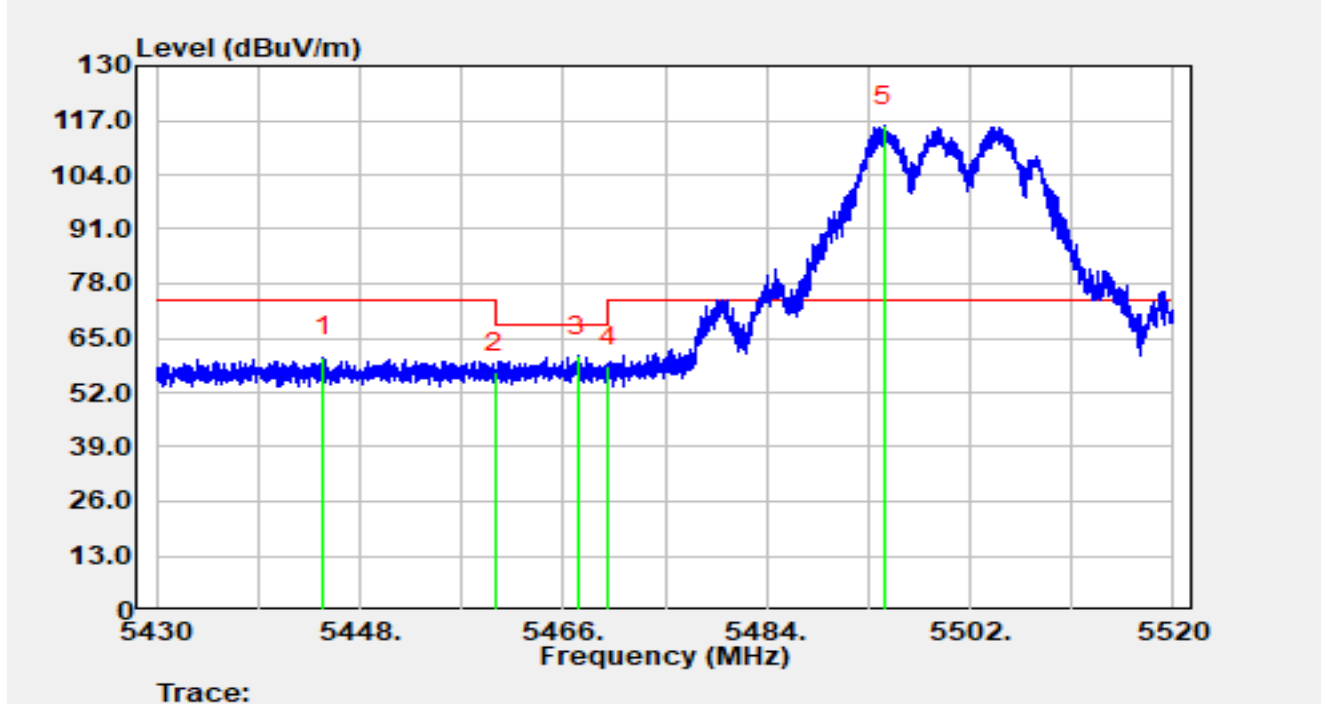


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5444.81	44.56	15.89	60.45	-13.55	74.00	Peak
2		5460.00	40.83	16.00	56.83	-11.37	68.20	Peak
3	*	5467.28	44.71	15.95	60.66	-7.54	68.20	Peak
4		5470.00	42.33	15.97	58.30	-9.90	68.20	Peak
5		5494.42	99.38	16.24	115.62	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5500 MHz		

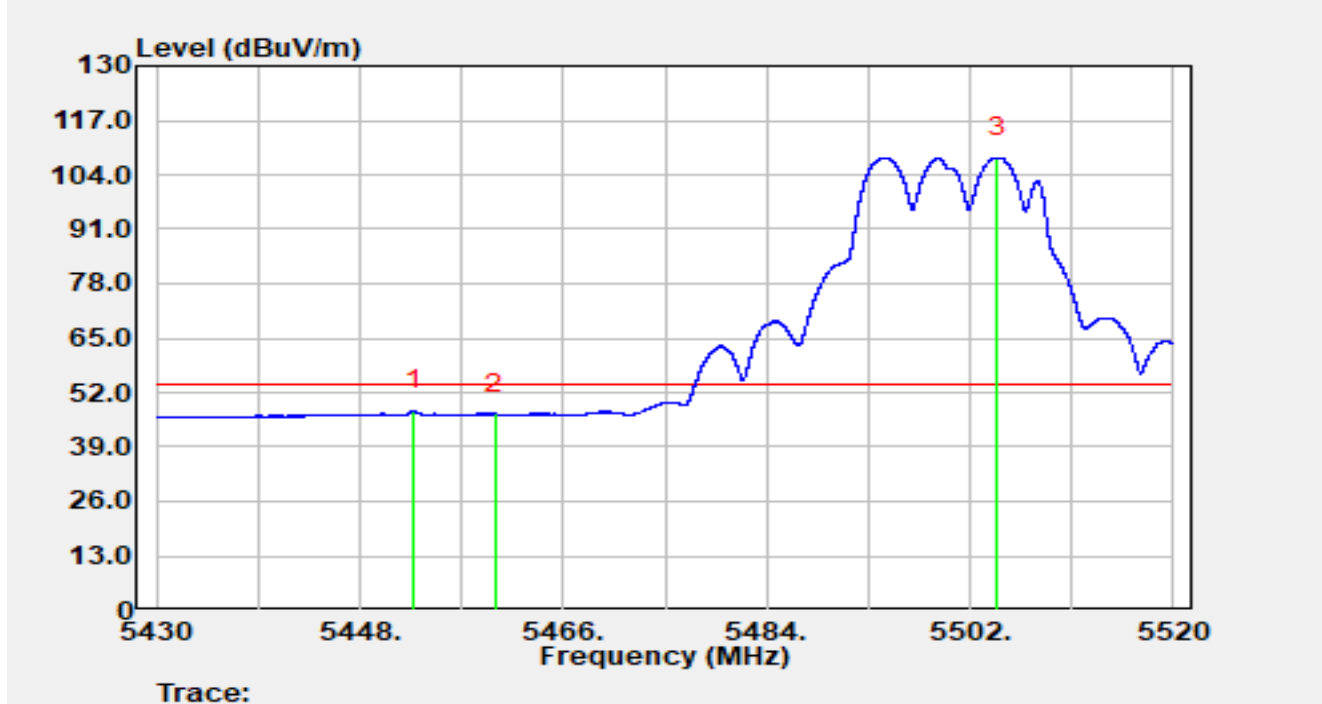


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5452.82	31.57	16.03	47.60	-6.40	54.00	Average
2		5460.00	30.85	16.00	46.85	-7.15	54.00	Average
3		5504.46	91.85	16.30	108.15	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5700 MHz		

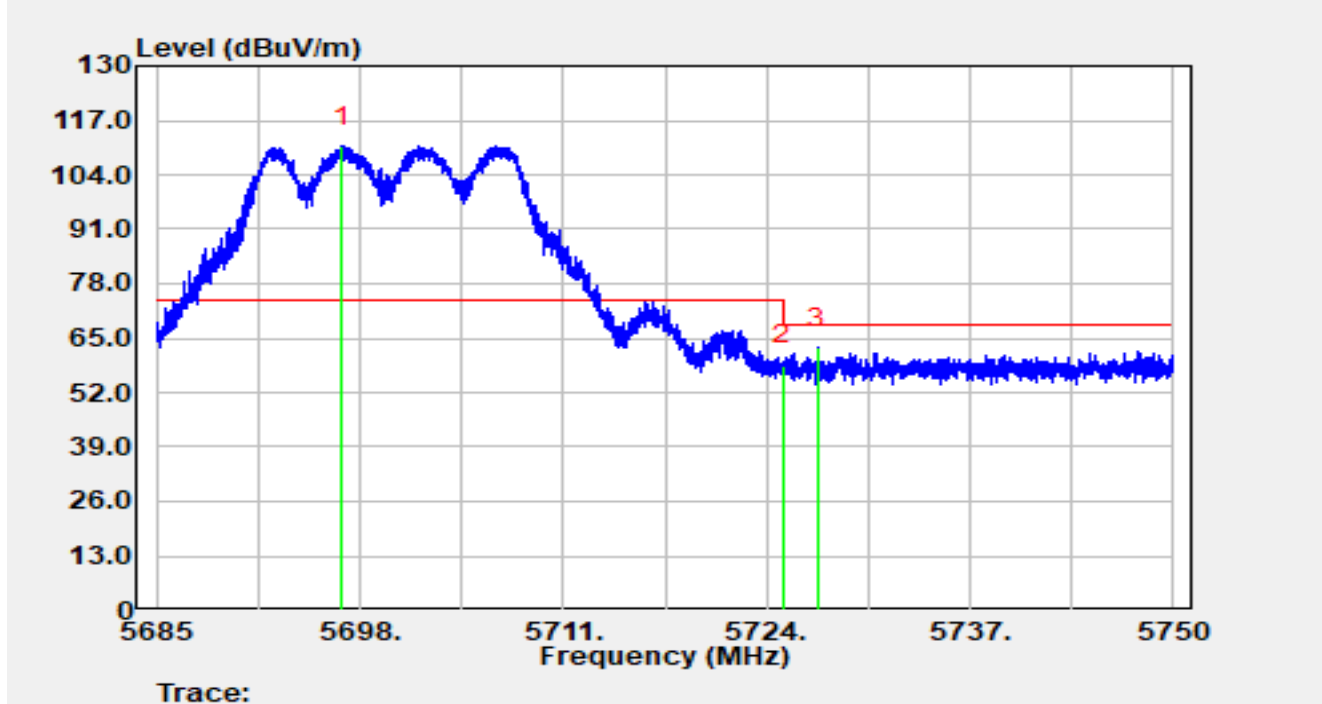


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5696.86	93.73	17.04	110.78	N/A	N/A	Peak
2		5725.00	41.64	16.98	58.61	-9.59	68.20	Peak
3	*	5727.24	45.77	16.97	62.74	-5.46	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5700 MHz		

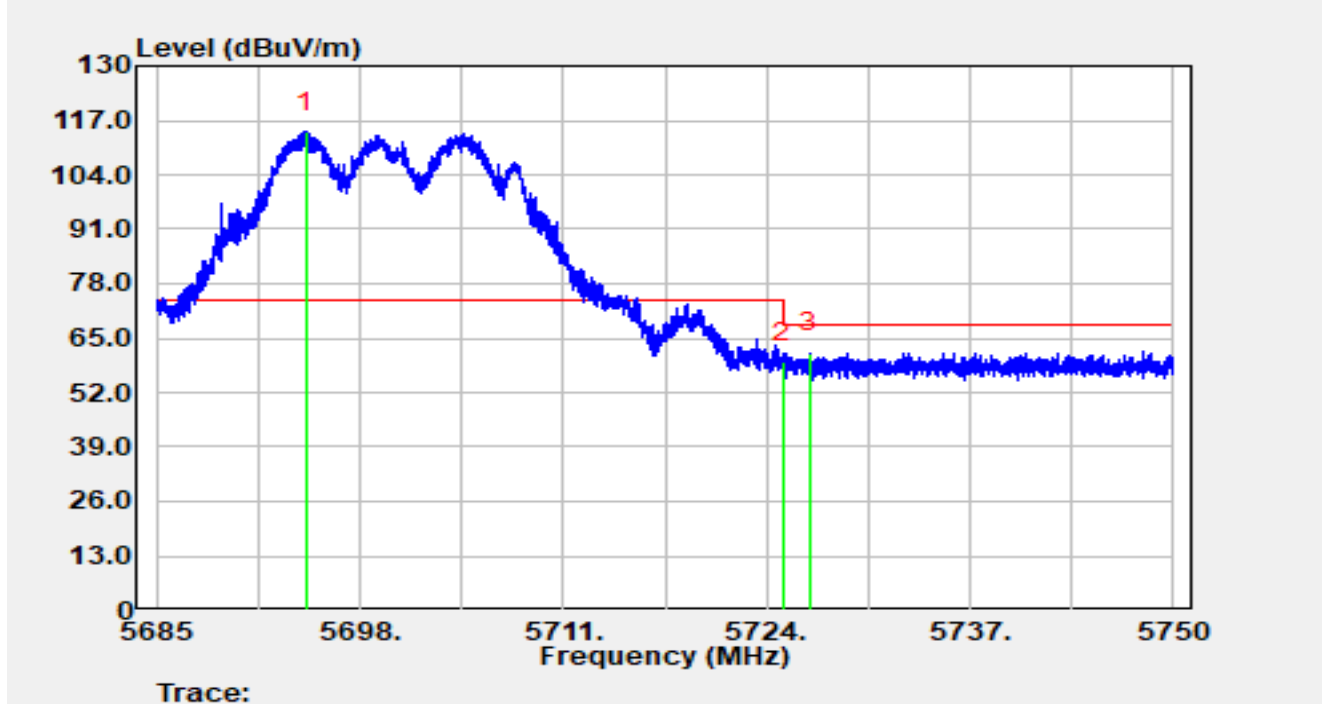


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5694.56	97.19	17.05	114.24	N/A	N/A	Peak
2		5725.00	42.22	16.98	59.19	-9.01	68.20	Peak
3	*	5726.75	44.47	16.97	61.45	-6.75	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-08-04
Temperature	27.6°C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5745 MHz		

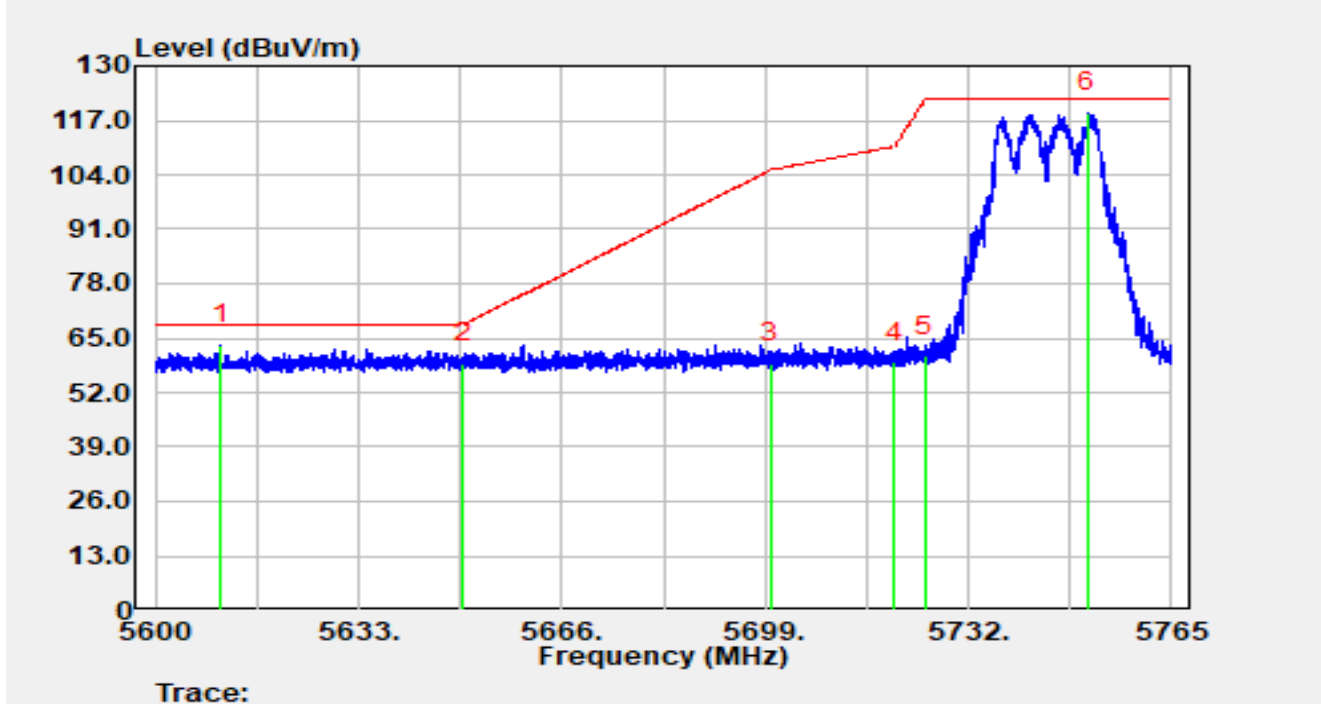


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5610.63	46.84	16.56	63.40	-4.80	68.20	Peak
2		5650.00	42.08	16.79	58.88	-9.32	68.20	Peak
3		5700.00	42.07	17.03	59.10	-46.10	105.20	Peak
4		5720.00	42.31	16.98	59.29	-51.51	110.80	Peak
5		5725.00	43.74	16.98	60.71	-61.49	122.20	Peak
6		5751.40	101.80	17.04	118.83	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-08-04
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5745 MHz		

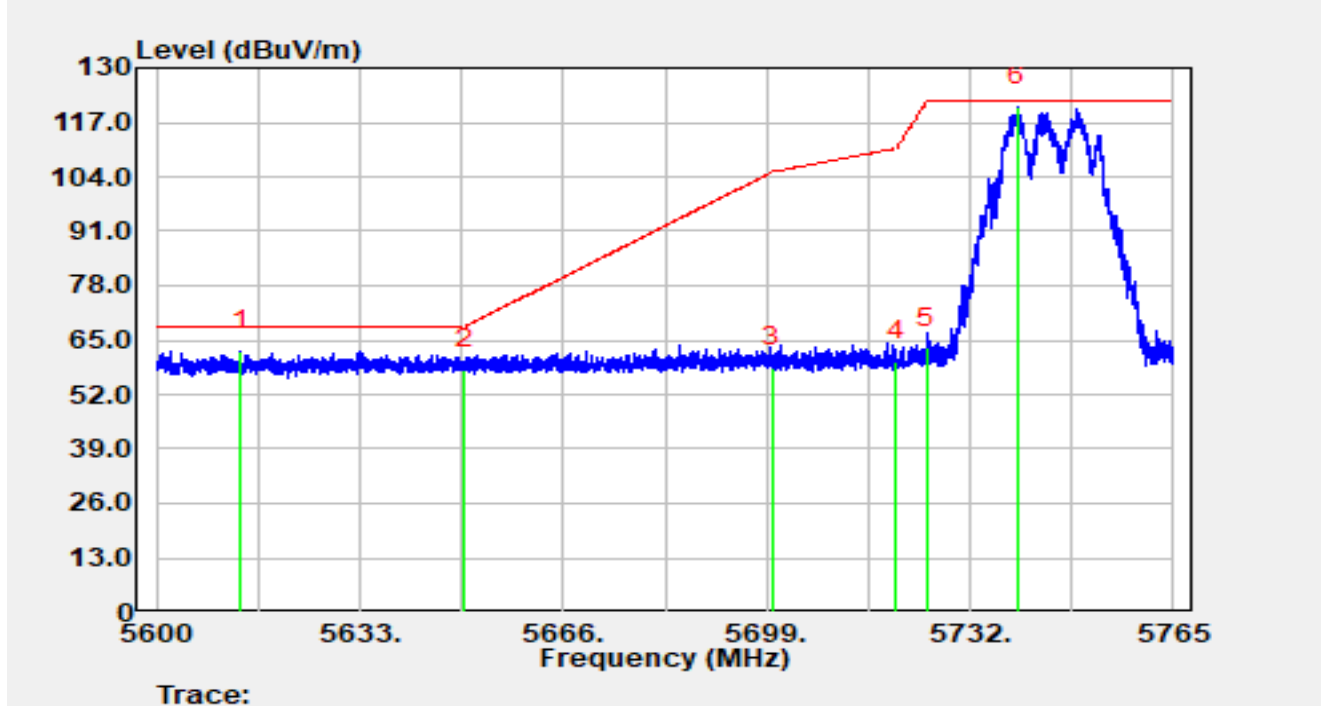


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5613.56	45.86	16.53	62.39	-5.81	68.20	Peak
2		5650.00	41.26	16.79	58.05	-10.15	68.20	Peak
3		5700.00	41.37	17.03	58.41	-46.79	105.20	Peak
4		5720.00	42.95	16.98	59.93	-50.87	110.80	Peak
5		5725.00	46.17	16.98	63.15	-59.05	122.20	Peak
6		5739.64	103.73	16.96	120.69	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5825 MHz		

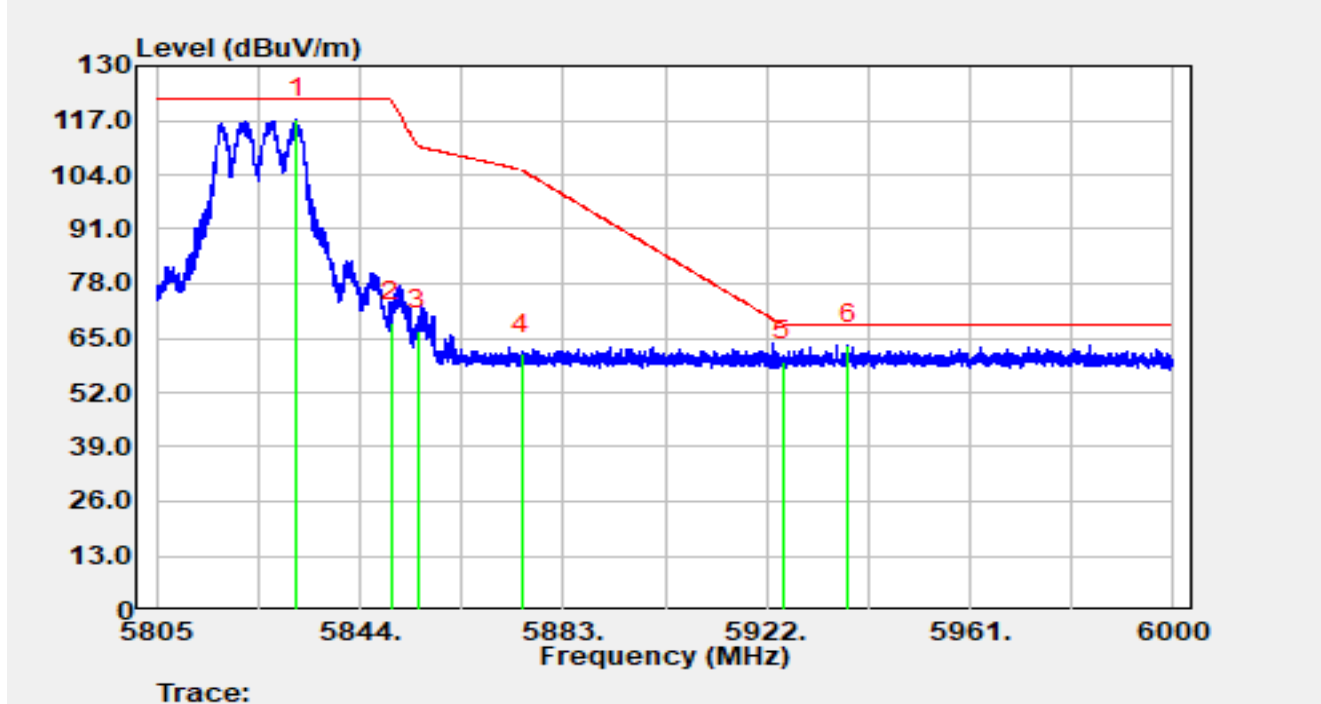


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5831.89	99.81	17.49	117.29	N/A	N/A	Peak
2		5850.00	51.29	17.56	68.86	-53.34	122.20	Peak
3		5855.00	49.22	17.52	66.75	-44.05	110.80	Peak
4		5875.00	43.69	17.61	61.29	-43.91	105.20	Peak
5		5925.00	41.99	17.49	59.48	-8.72	68.20	Peak
6	*	5937.62	45.83	17.57	63.40	-4.80	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11a at 5825 MHz		

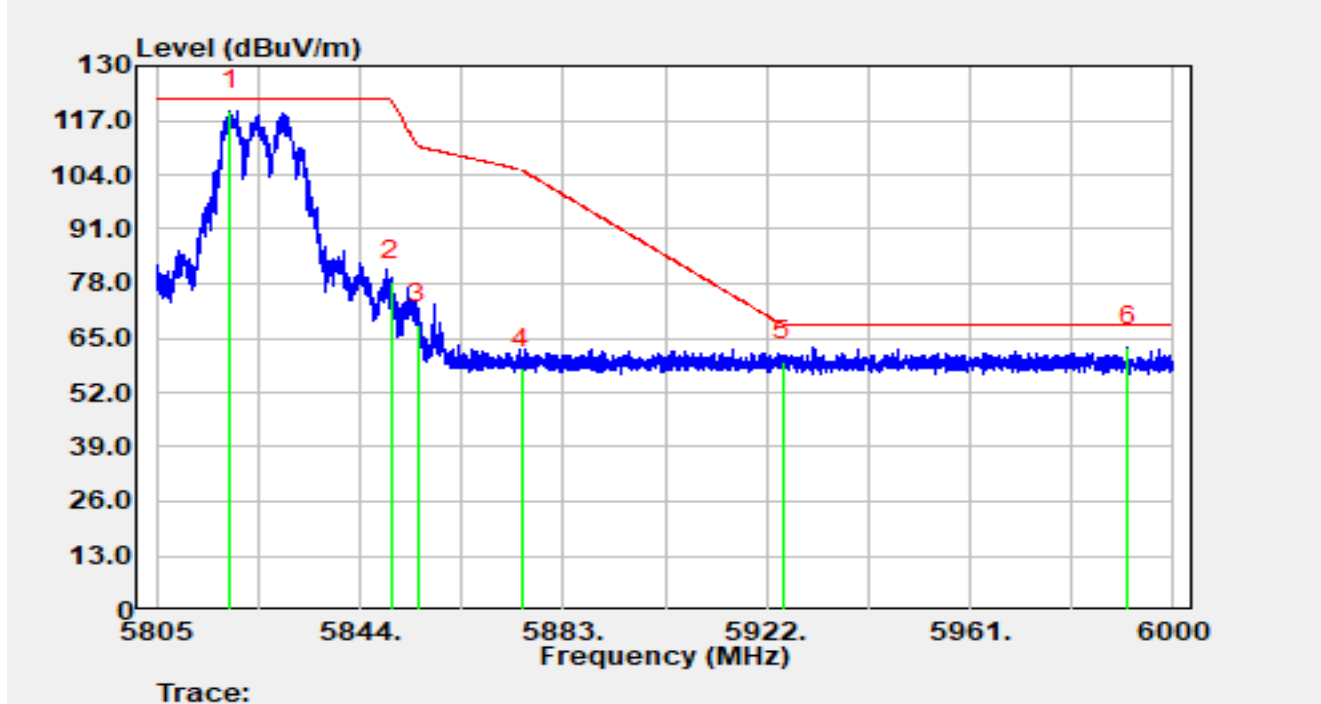


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5819.04	101.87	17.42	119.29	N/A	N/A	Peak
2		5850.00	61.14	17.56	78.70	-43.50	122.20	Peak
3		5855.00	50.67	17.52	68.20	-42.60	110.80	Peak
4		5875.00	40.19	17.61	57.80	-47.40	105.20	Peak
5		5925.00	41.91	17.49	59.39	-8.81	68.20	Peak
6	*	5991.23	45.37	17.51	62.88	-5.32	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

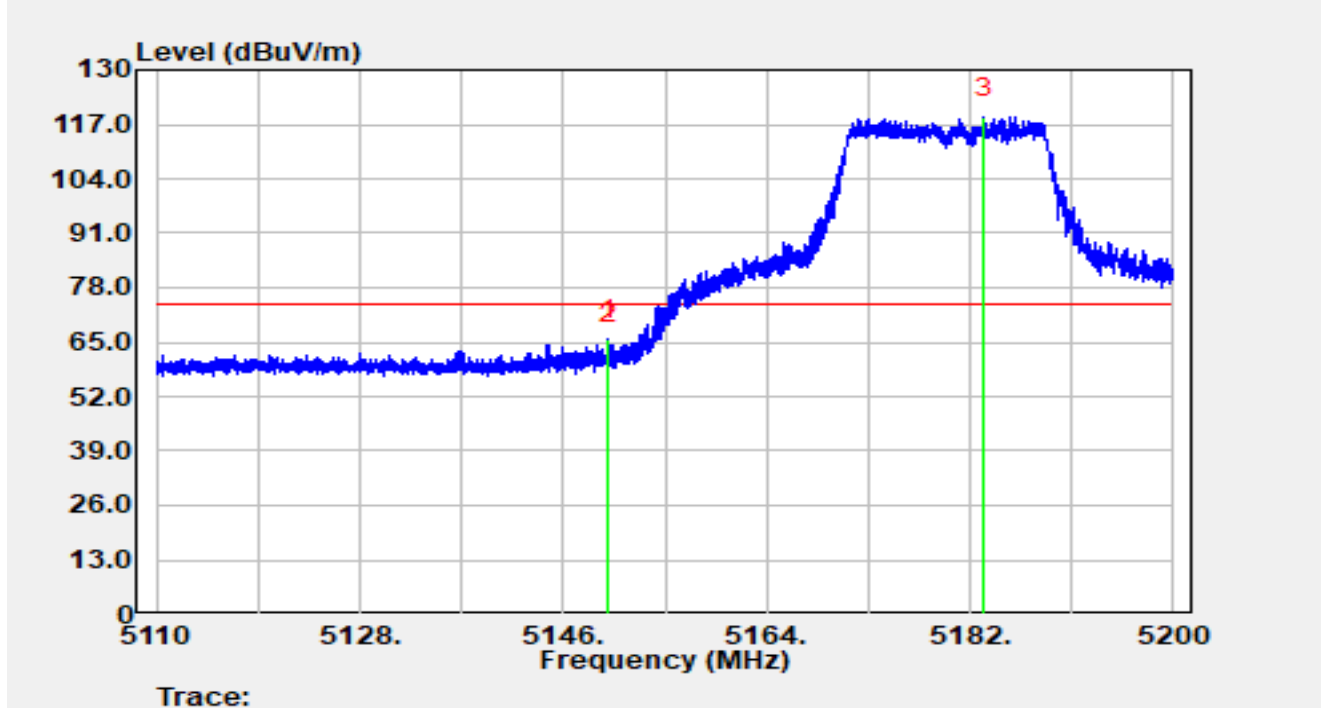


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.98	49.59	15.99	65.59	-8.41	74.00	Peak
2		5150.00	48.50	15.99	64.49	-9.51	74.00	Peak
3		5183.26	102.64	16.01	118.65	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

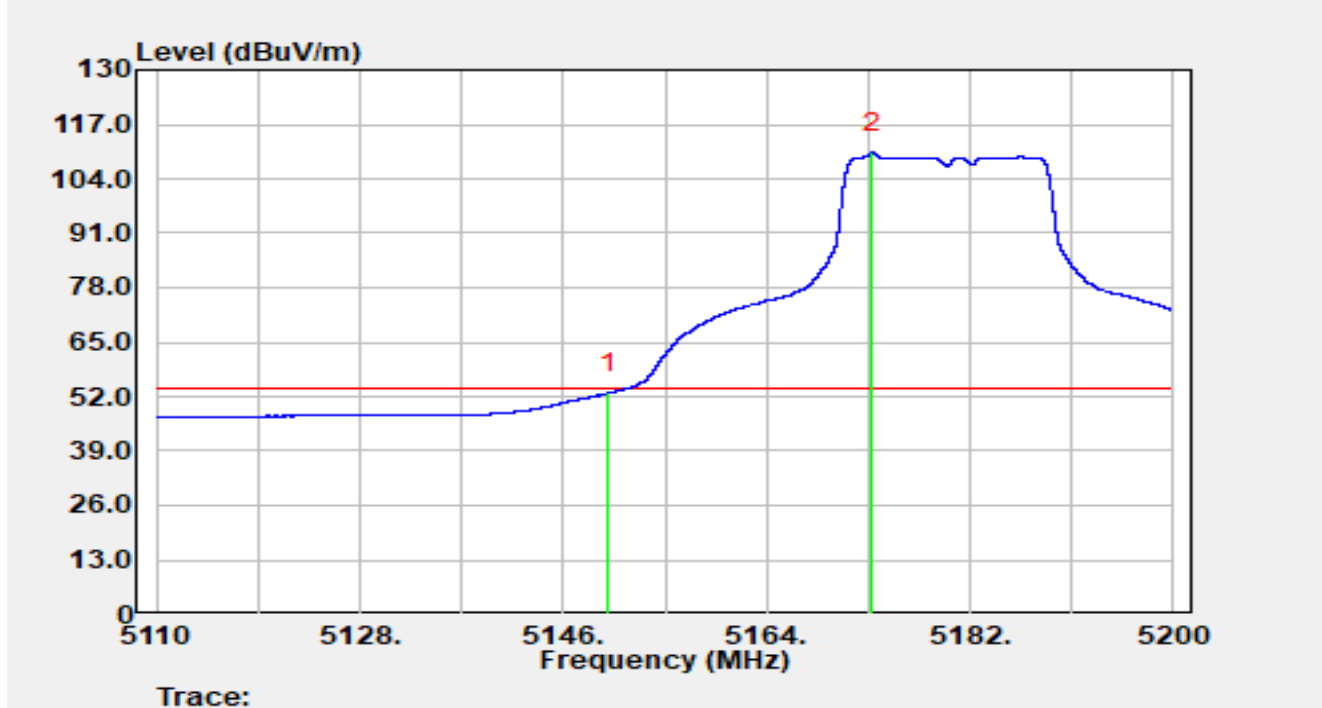


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.00	36.75	15.99	52.74	-1.26	54.00	Average
2		5173.38	94.33	16.02	110.35	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

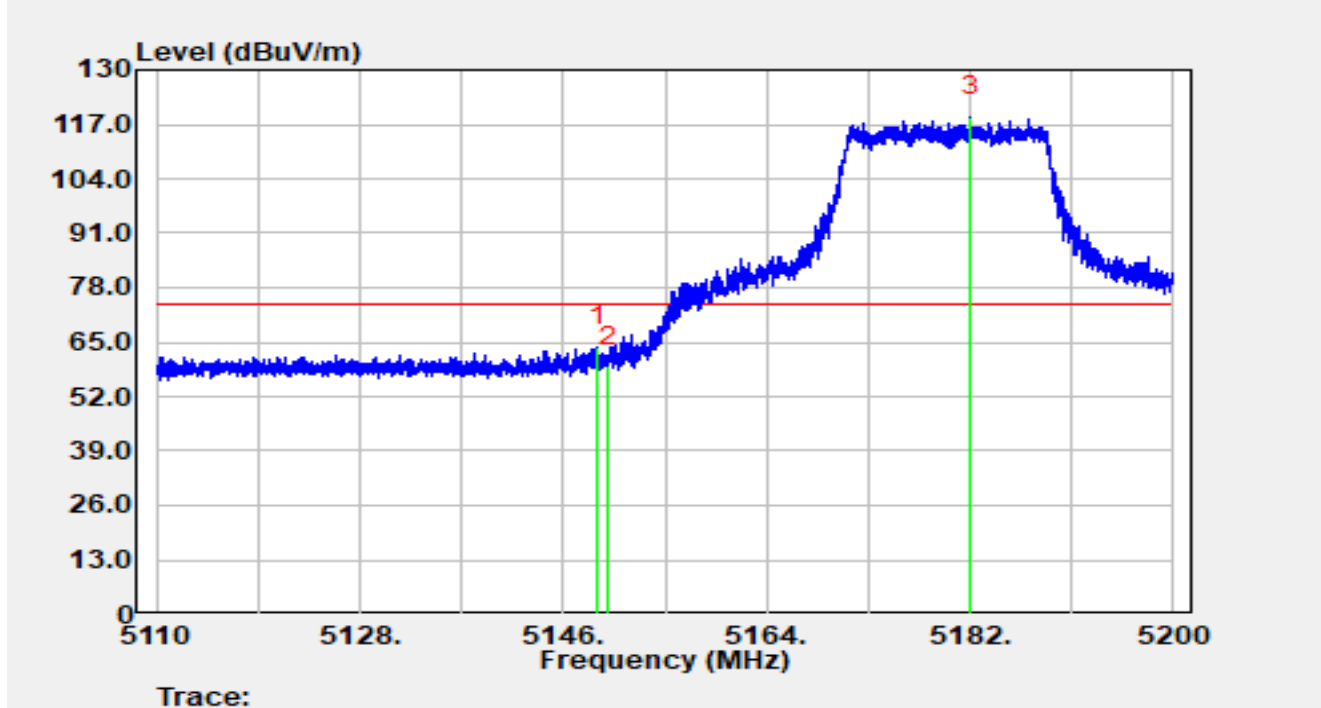


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.02	47.95	15.99	63.94	-10.06	74.00	Peak
2		5150.00	43.26	15.99	59.25	-14.75	74.00	Peak
3		5182.07	102.80	16.01	118.81	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

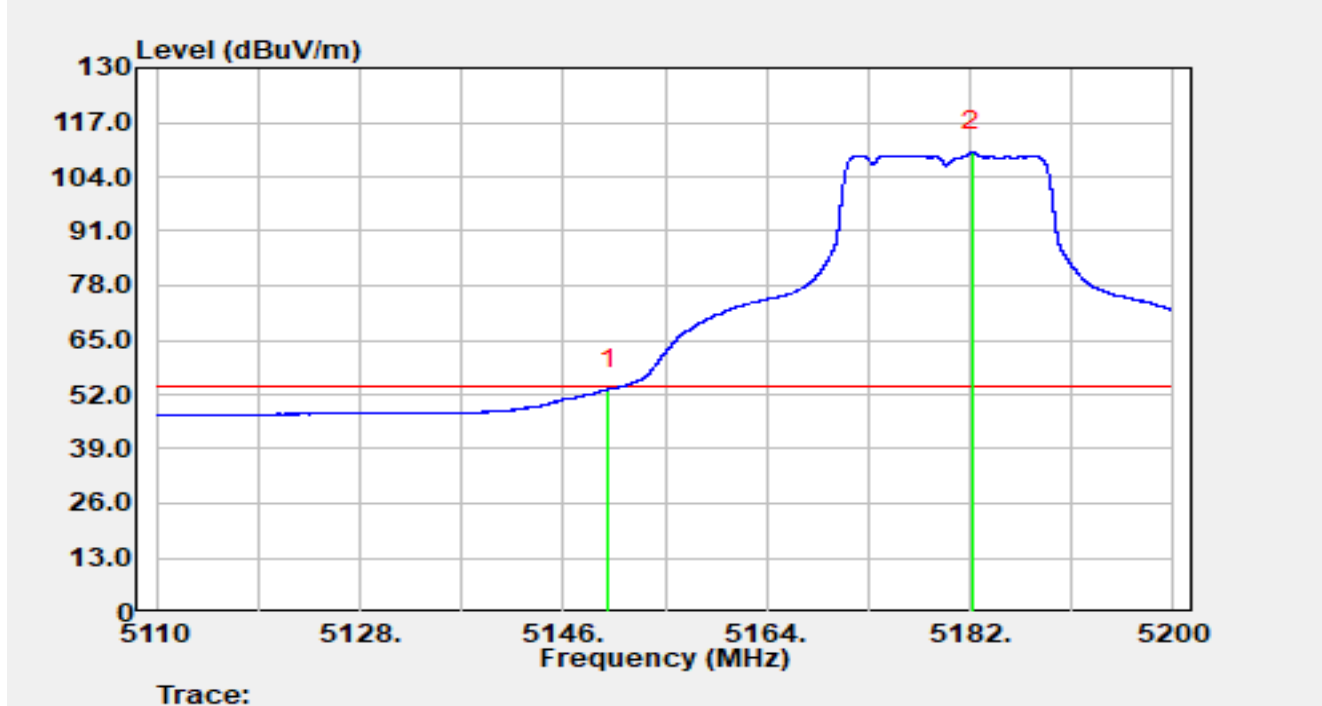


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.00	37.20	15.99	53.20	-0.80	54.00	Average
2		5182.13	93.94	16.01	109.95	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

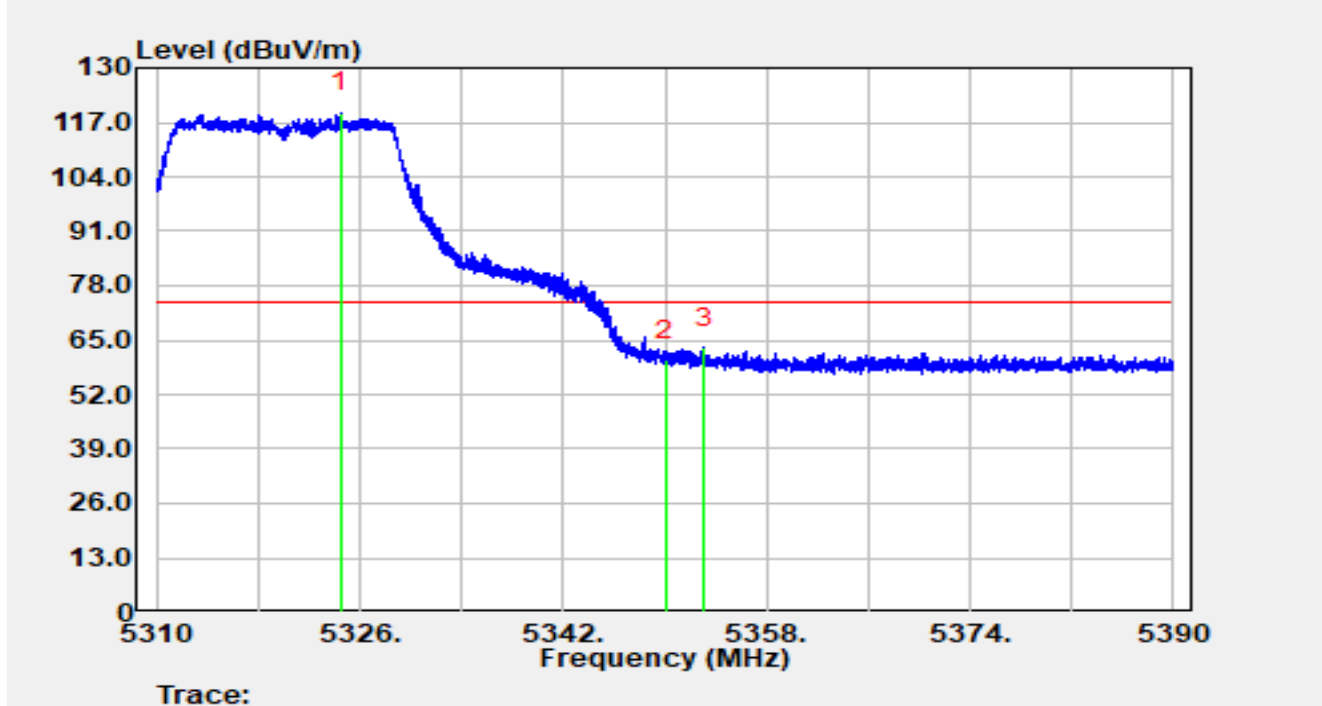


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5324.46	103.43	15.84	119.27	N/A	N/A	Peak
2		5350.00	44.40	15.72	60.12	-13.88	74.00	Peak
3	*	5353.10	47.29	15.75	63.04	-10.96	74.00	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

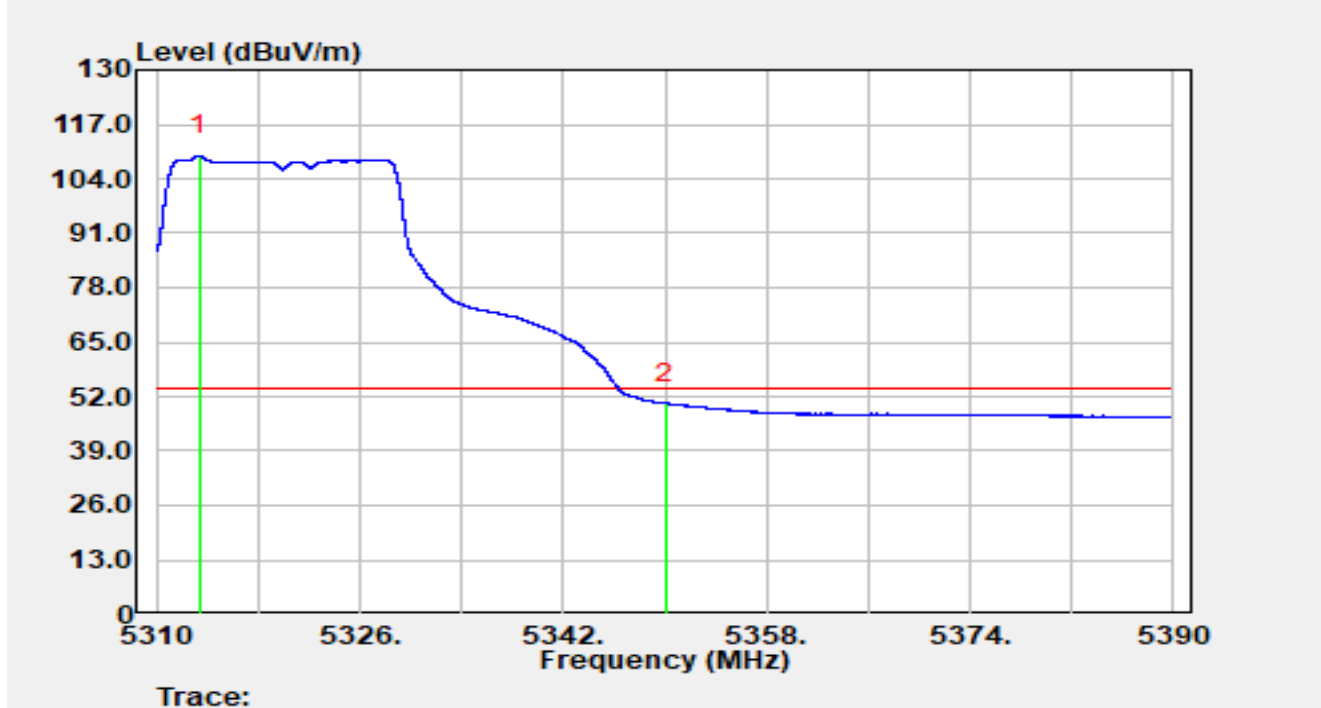


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5313.36	93.76	15.81	109.57	N/A	N/A	Average
2	*	5350.00	34.68	15.72	50.40	-3.60	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

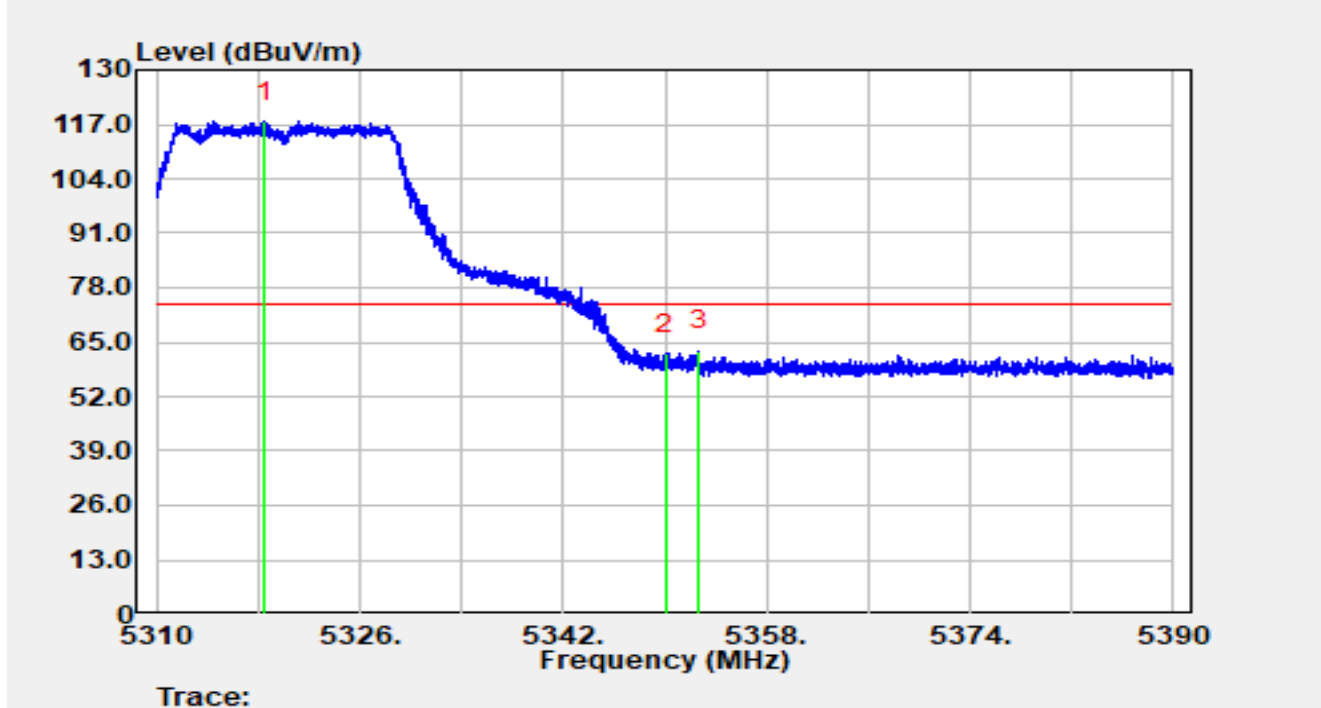


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5318.54	101.89	15.82	117.70	N/A	N/A	Peak
2		5350.00	46.57	15.72	62.29	-11.71	74.00	Peak
3	*	5352.69	47.14	15.75	62.89	-11.11	74.00	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

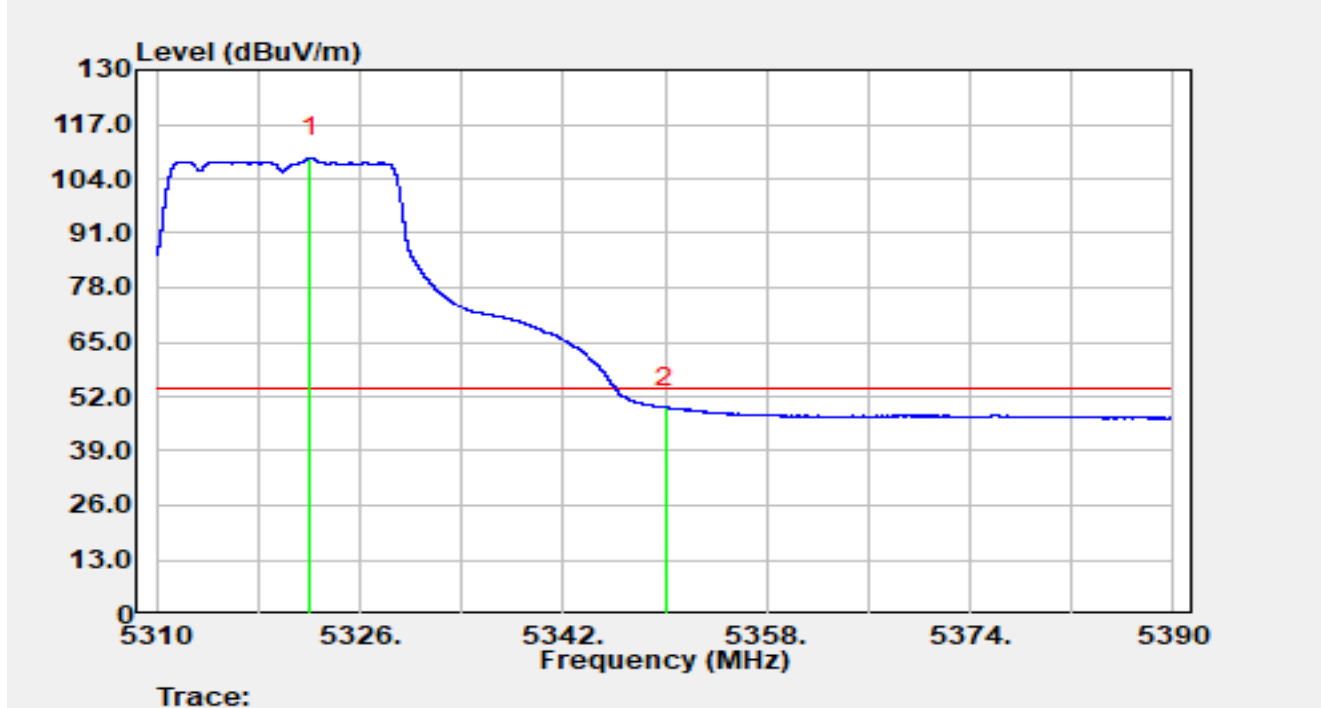


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5322.12	93.25	15.83	109.08	N/A	N/A	Average
2	*	5350.00	33.66	15.72	49.38	-4.62	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

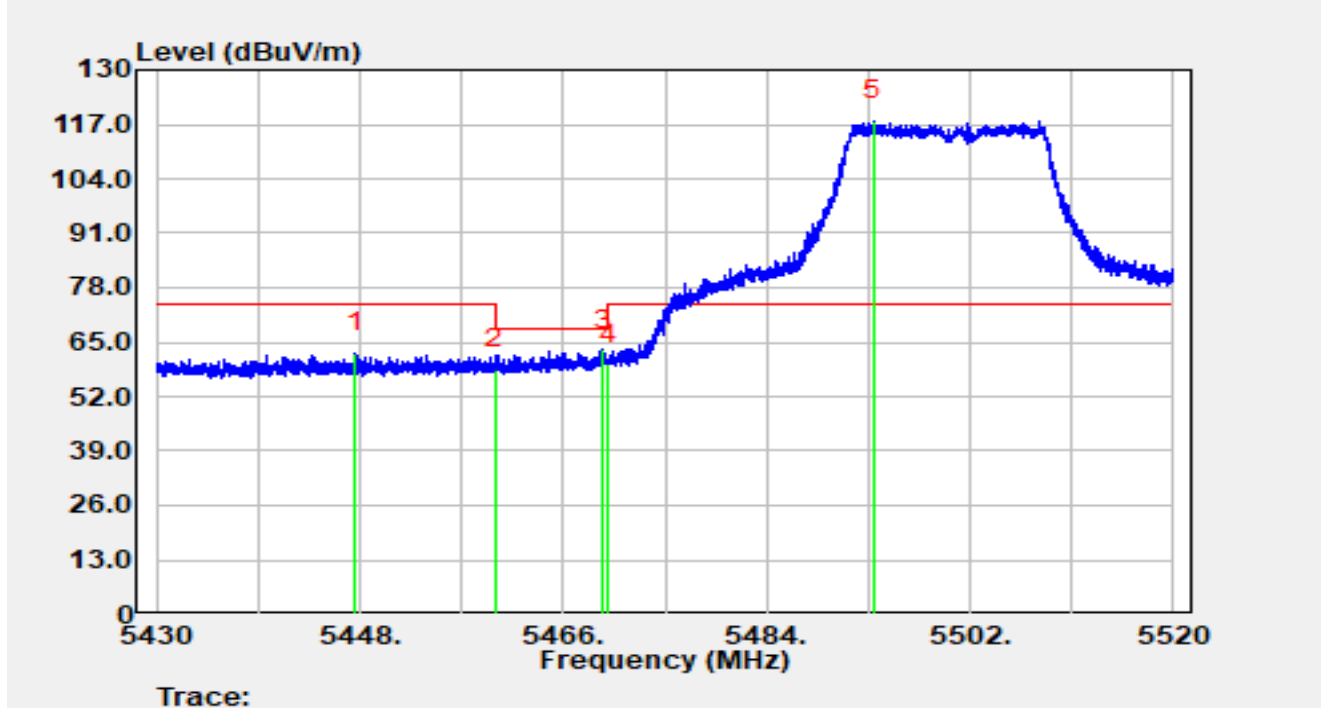


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5447.64	46.42	15.95	62.37	-11.63	74.00	Peak
2		5460.00	42.43	16.00	58.43	-9.77	68.20	Peak
3	*	5469.56	47.27	15.96	63.23	-4.97	68.20	Peak
4		5470.00	43.81	15.97	59.78	-8.42	68.20	Peak
5		5493.41	101.51	16.24	117.74	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

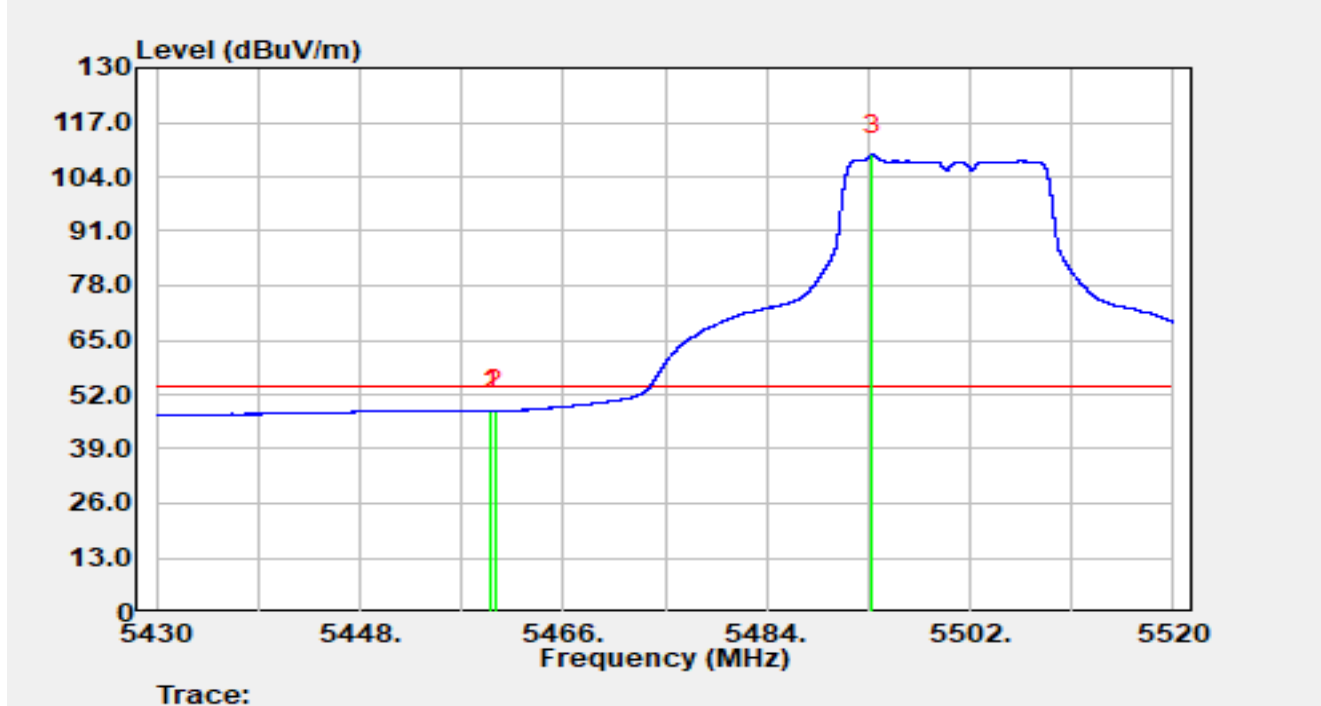


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.67	32.20	16.00	48.21	-5.79	54.00	Average
2		5460.00	32.10	16.00	48.10	-5.90	54.00	Average
3		5493.38	92.98	16.24	109.21	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

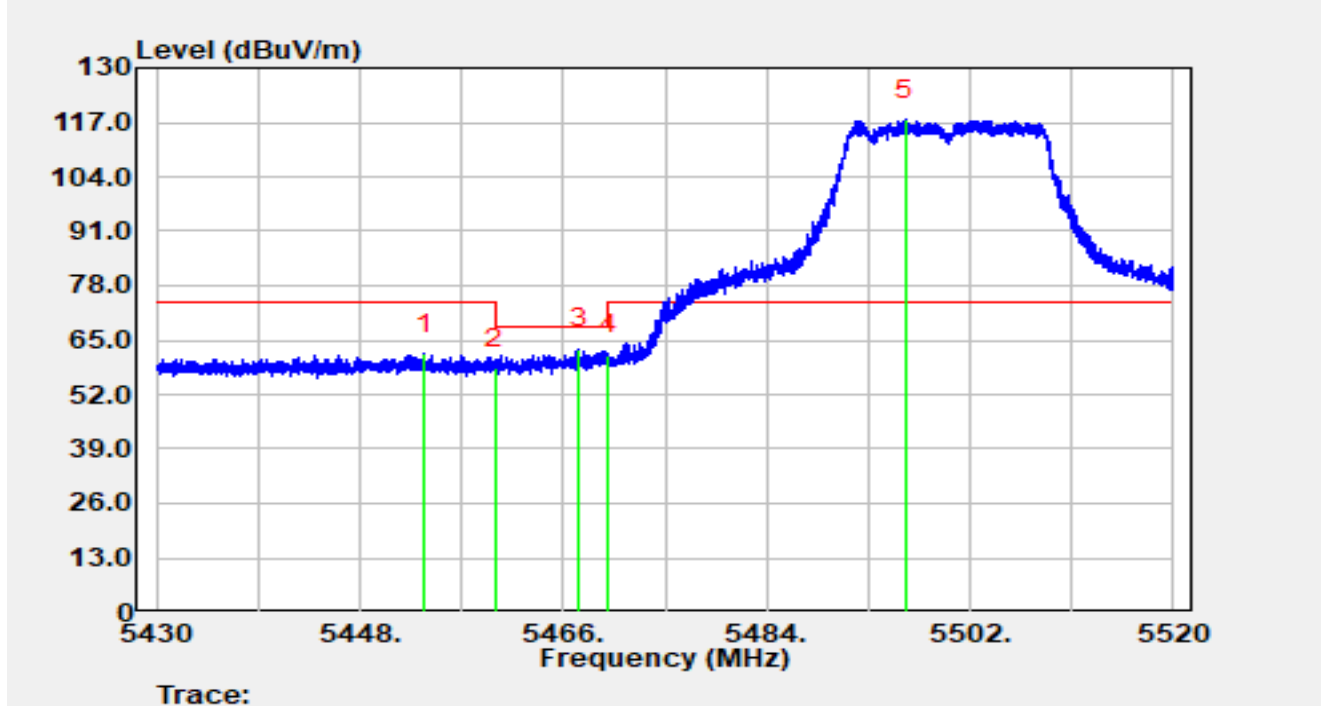


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5453.74	45.56	16.03	61.59	-12.41	74.00	Peak
2		5460.00	42.23	16.00	58.23	-9.97	68.20	Peak
3	*	5467.39	46.87	15.95	62.82	-5.38	68.20	Peak
4		5470.00	45.47	15.97	61.43	-6.77	68.20	Peak
5		5496.22	101.33	16.26	117.59	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

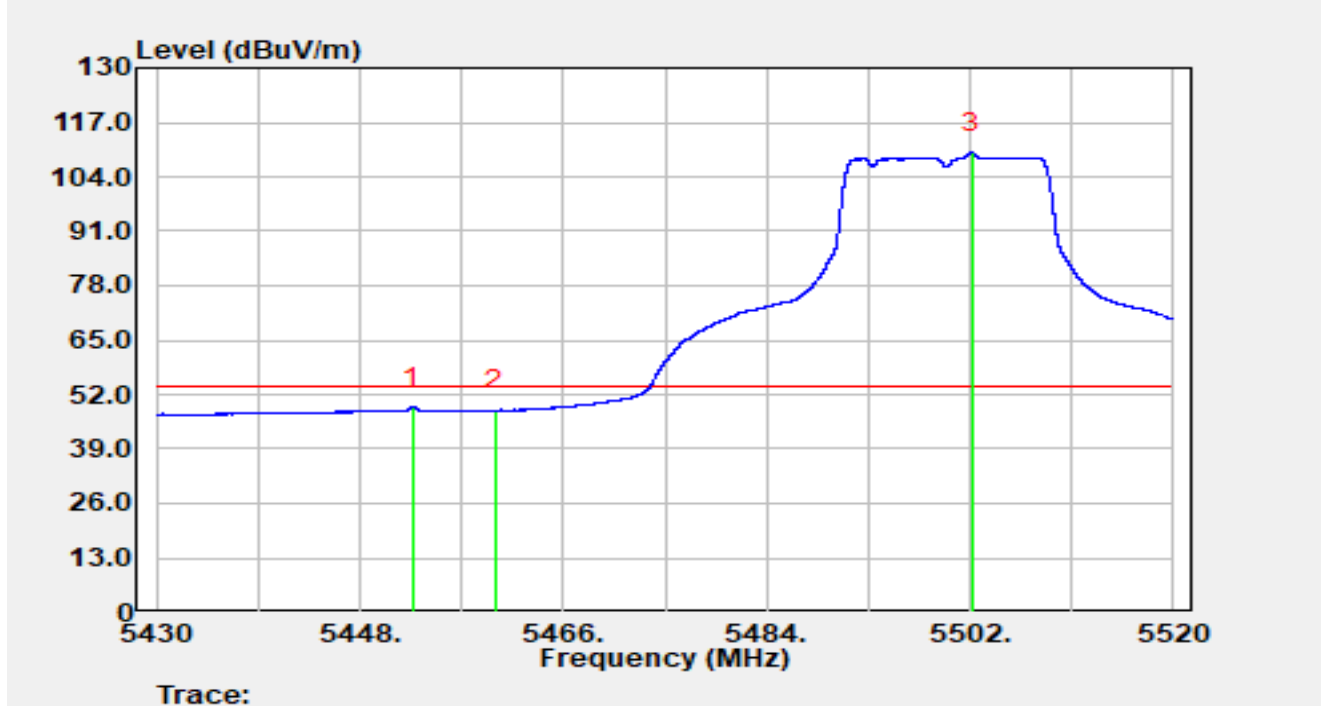


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5452.66	32.84	16.03	48.87	-5.13	54.00	Average
2		5460.00	32.19	16.00	48.19	-5.81	54.00	Average
3		5502.14	93.49	16.30	109.78	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5700 MHz		

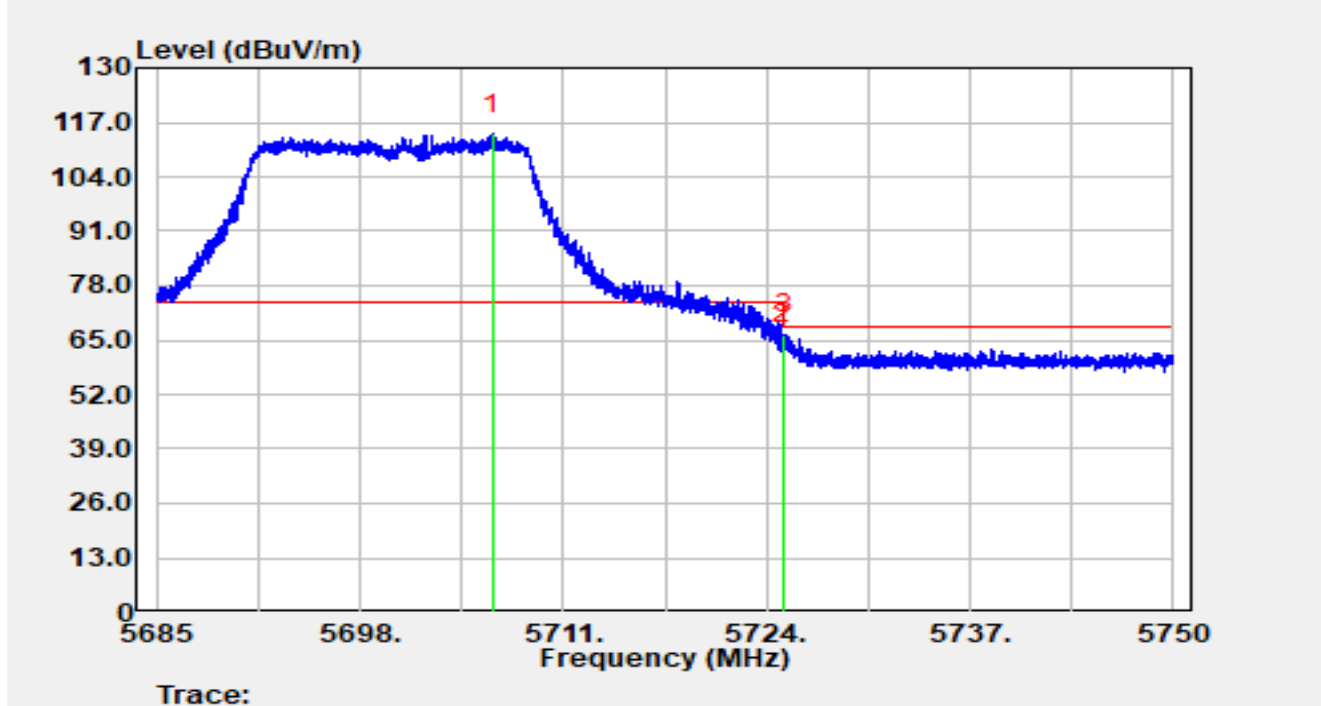


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5706.48	97.06	17.01	114.08	N/A	N/A	Peak
2		5725.00	46.90	16.98	63.88	-4.32	68.20	Peak
3	*	5725.14	49.36	16.97	66.33	-1.87	68.20	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5700 MHz		

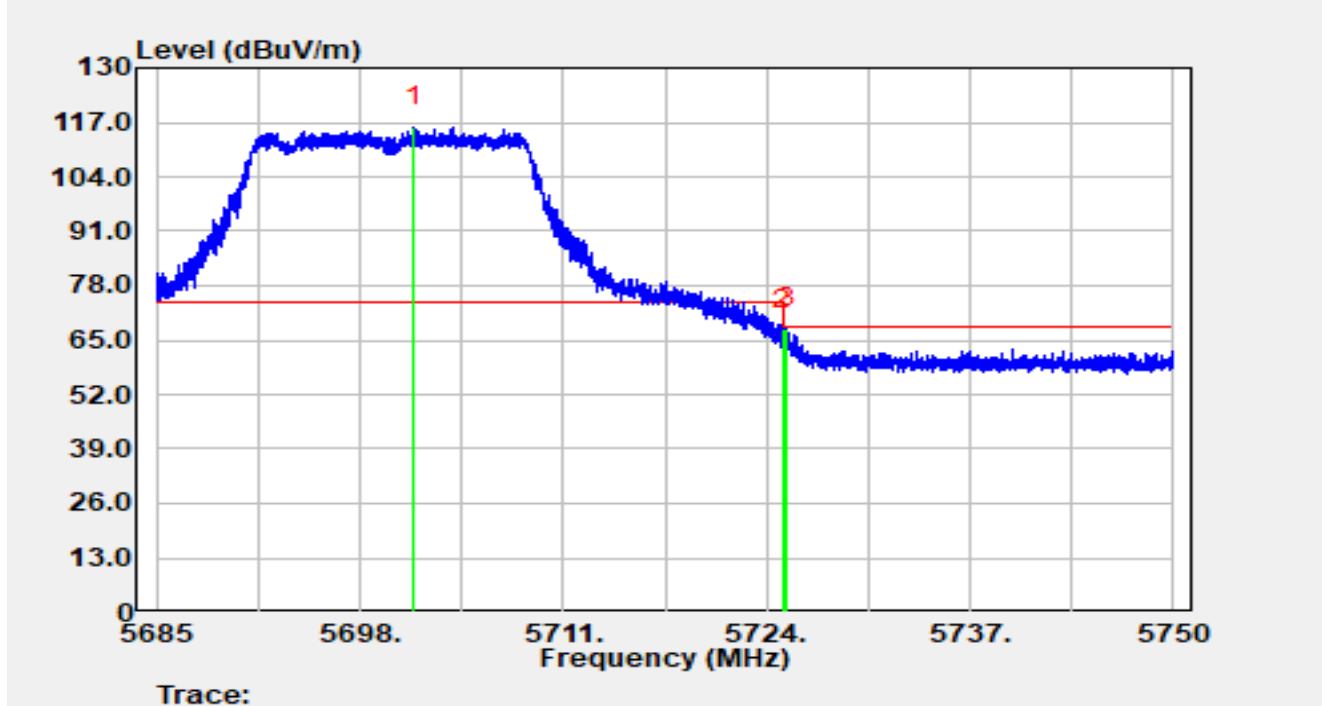


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5701.48	98.75	17.03	115.78	N/A	N/A	Peak
2		5725.00	50.67	16.98	67.64	-0.56	68.20	Peak
3	*	5725.27	50.92	16.97	67.89	-0.31	68.20	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5745 MHz		

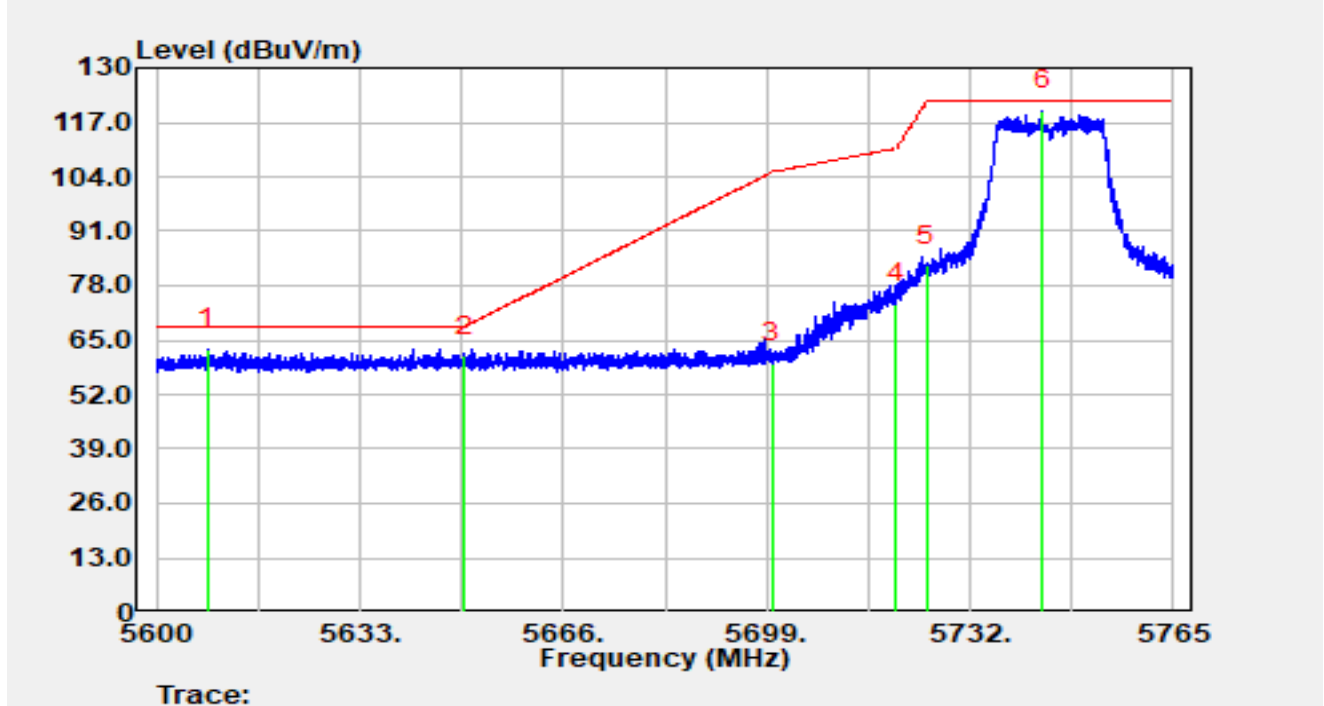


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5608.30	46.24	16.58	62.82	-5.38	68.20	Peak
2		5650.00	44.42	16.79	61.21	-6.99	68.20	Peak
3		5700.00	42.48	17.03	59.51	-45.69	105.20	Peak
4		5720.00	56.78	16.98	73.76	-37.04	110.80	Peak
5		5725.00	65.80	16.98	82.78	-39.42	122.20	Peak
6		5743.68	102.82	16.97	119.79	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5745 MHz		

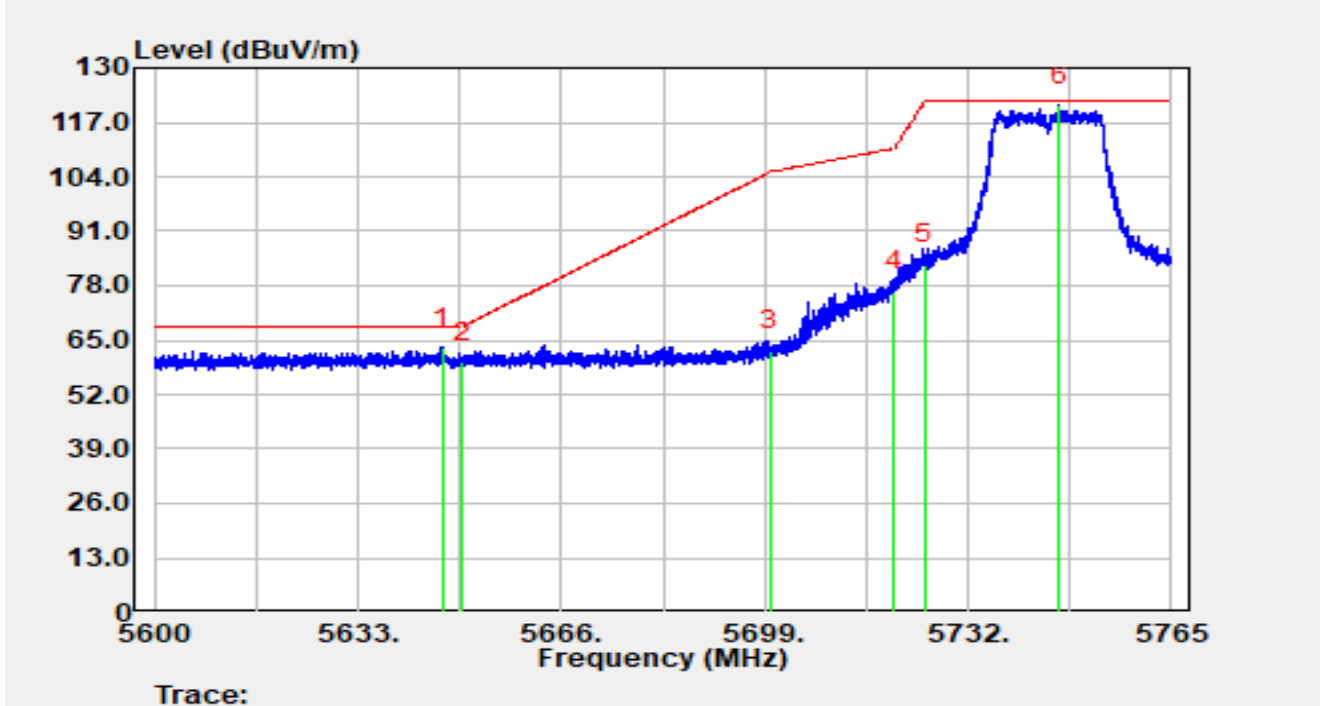


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5646.63	46.41	16.78	63.19	-5.01	68.20	Peak
2		5650.00	42.91	16.79	59.71	-8.49	68.20	Peak
3		5700.00	45.36	17.03	62.39	-42.81	105.20	Peak
4		5720.00	59.60	16.98	76.59	-34.21	110.80	Peak
5		5725.00	66.06	16.98	83.04	-39.16	122.20	Peak
6		5746.82	104.02	17.00	121.02	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5825 MHz		

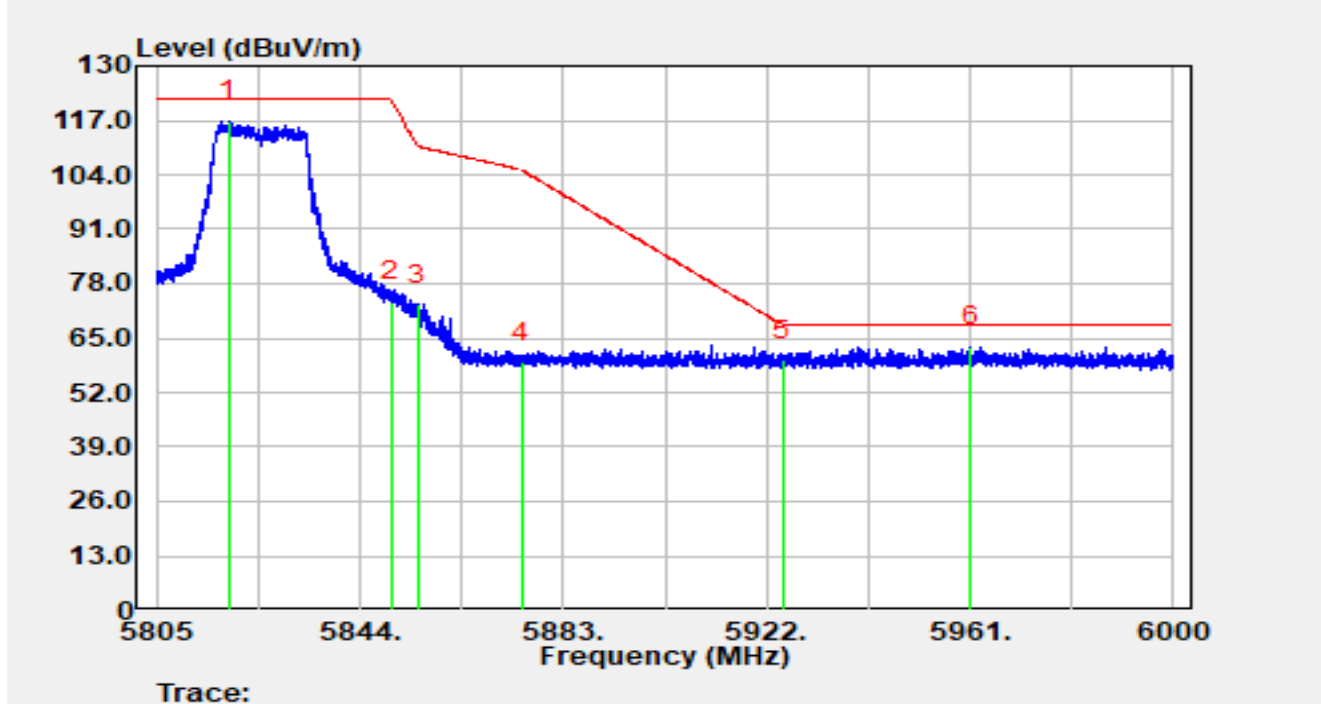


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5818.90	99.34	17.42	116.76	N/A	N/A	Peak
2		5850.00	56.15	17.56	73.72	-48.48	122.20	Peak
3		5855.00	55.56	17.52	73.09	-37.71	110.80	Peak
4		5875.00	41.69	17.61	59.30	-45.90	105.20	Peak
5		5925.00	42.12	17.49	59.60	-8.60	68.20	Peak
6	*	5961.16	45.15	17.66	62.80	-5.40	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-22
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT20 at 5825 MHz		

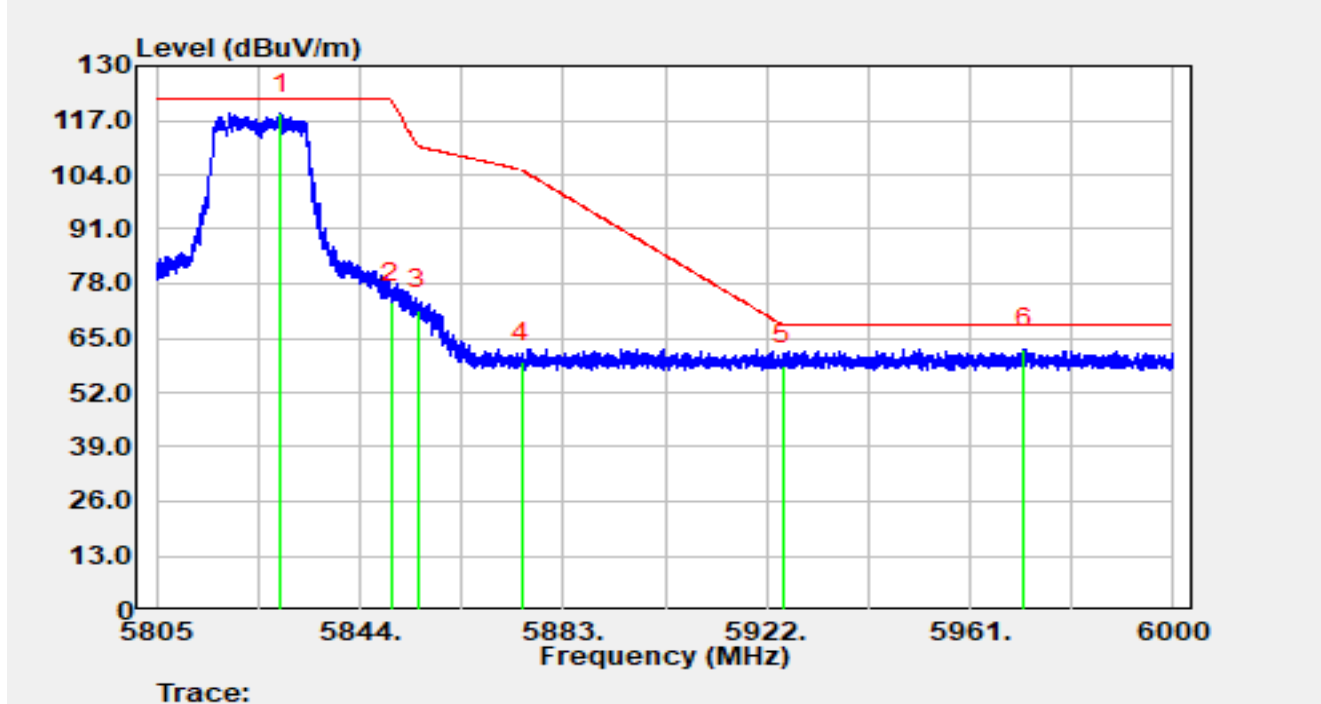


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5828.73	101.22	17.46	118.67	N/A	N/A	Peak
2		5850.00	56.00	17.56	73.56	-48.64	122.20	Peak
3		5855.00	54.30	17.52	71.82	-38.98	110.80	Peak
4		5875.00	41.61	17.61	59.21	-45.99	105.20	Peak
5		5925.00	41.09	17.49	58.58	-9.62	68.20	Peak
6	*	5971.45	44.83	17.71	62.54	-5.66	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac- VHT40 at 5190 MHz		

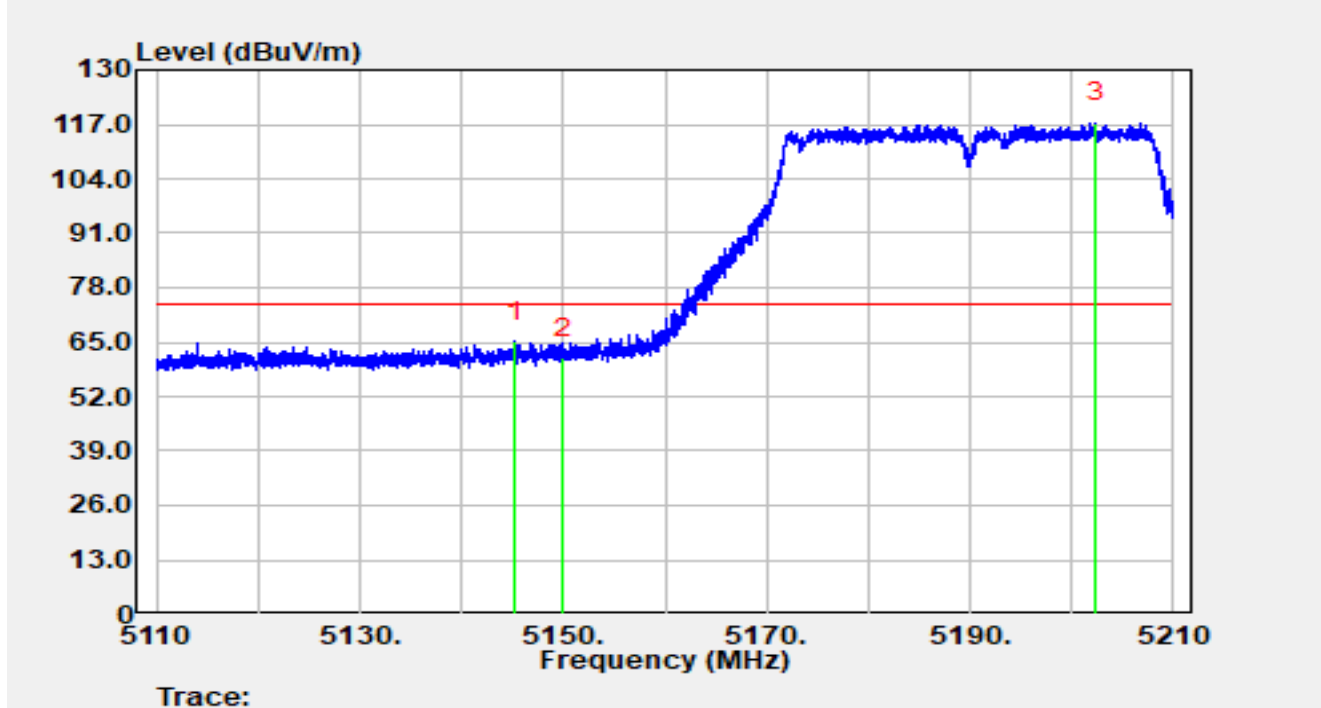


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.25	49.07	15.97	65.04	-8.96	74.00	Peak
2		5150.00	45.17	15.99	61.16	-12.84	74.00	Peak
3		5202.35	101.49	15.97	117.46	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac- VHT40 at 5190 MHz		

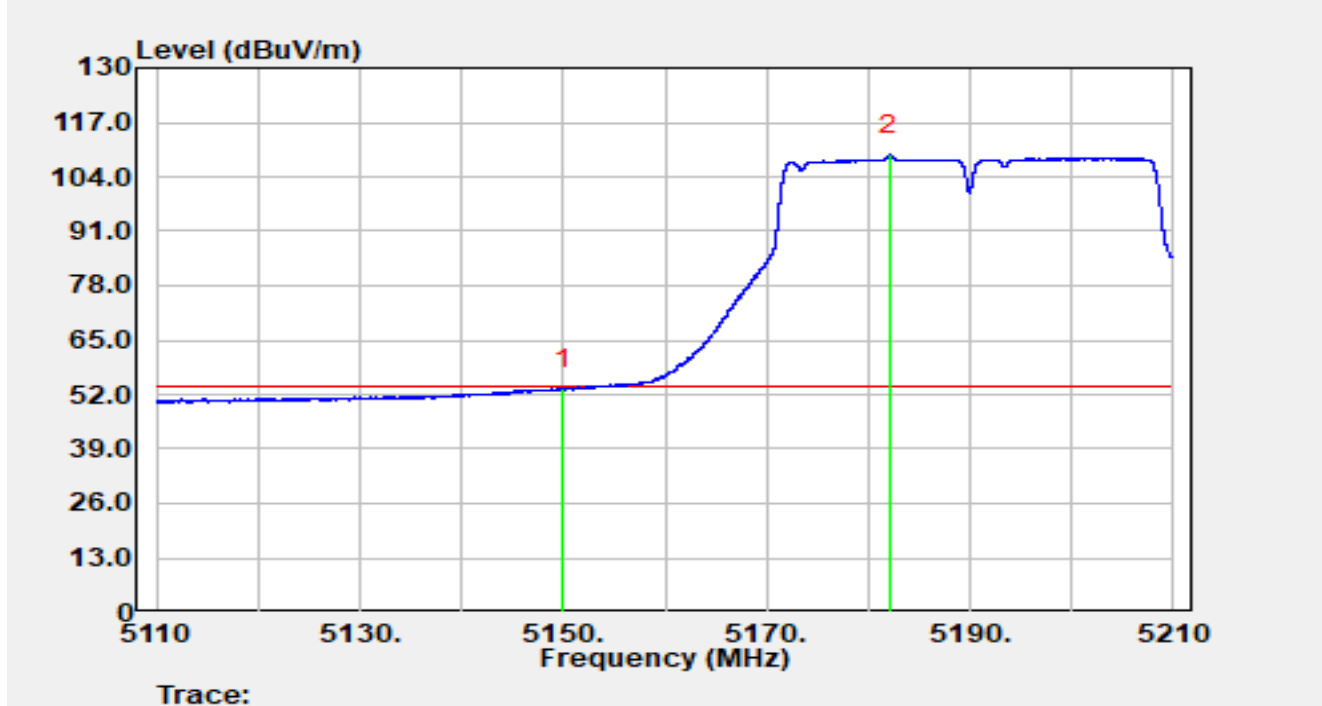


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.00	37.43	15.99	53.42	-0.58	54.00	Average
2		5182.12	93.23	16.01	109.23	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac- VHT40 at 5190 MHz		

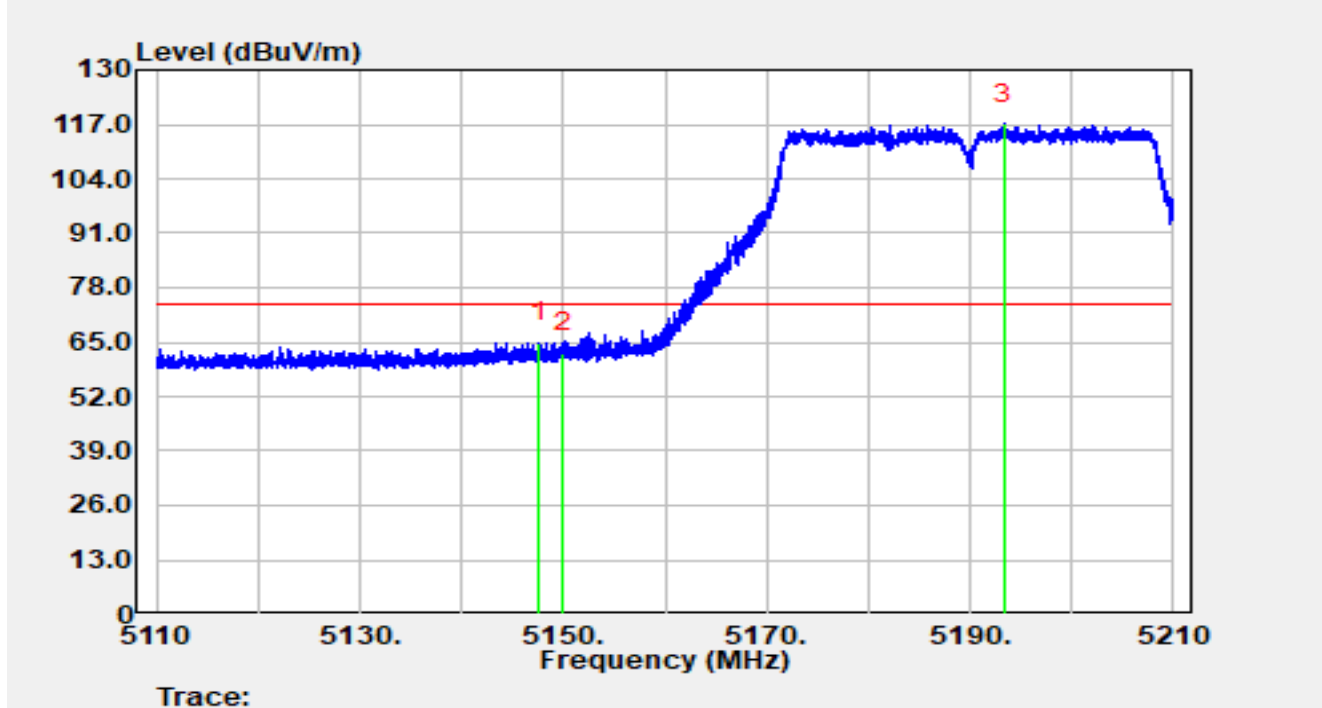


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.59	49.00	15.98	64.98	-9.02	74.00	Peak
2		5150.00	46.33	15.99	62.32	-11.68	74.00	Peak
3		5193.30	101.25	15.99	117.24	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac- VHT40 at 5190 MHz		

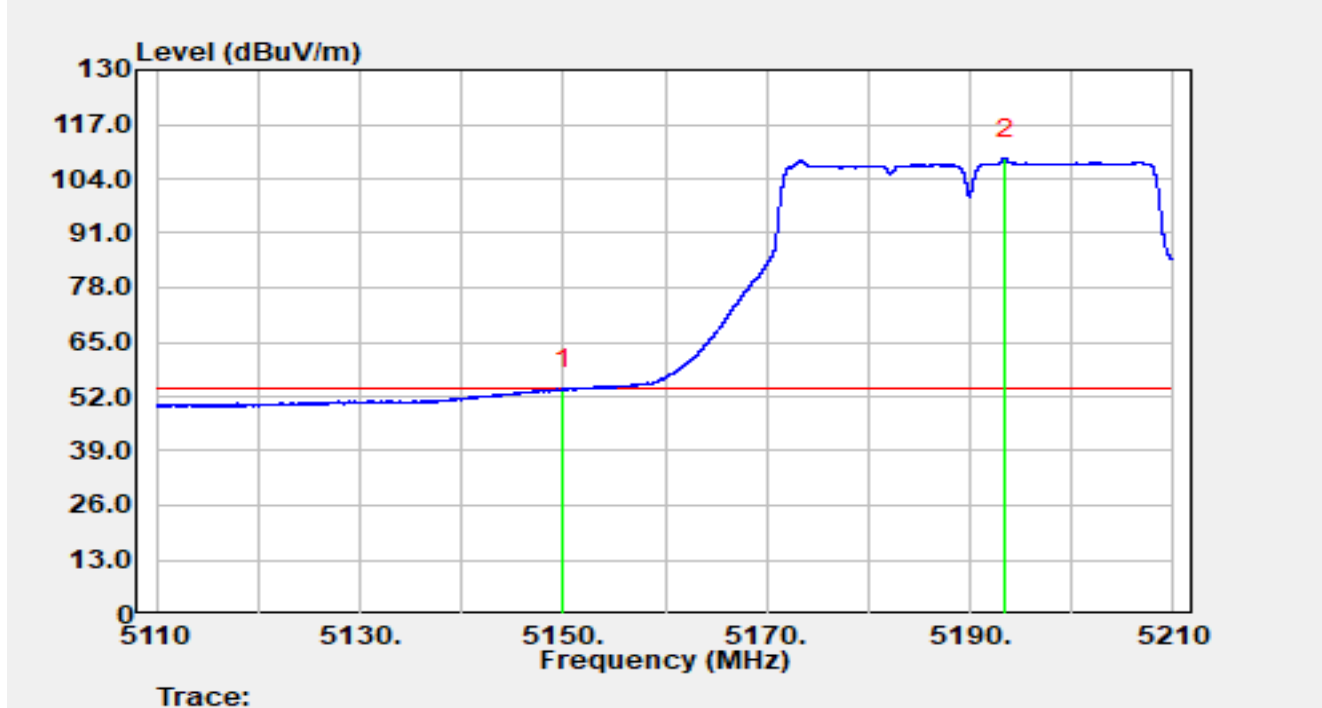


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.00	37.70	15.99	53.69	-0.31	54.00	Average
2		5193.41	92.87	15.99	108.86	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac- VHT40 at 5310 MHz		

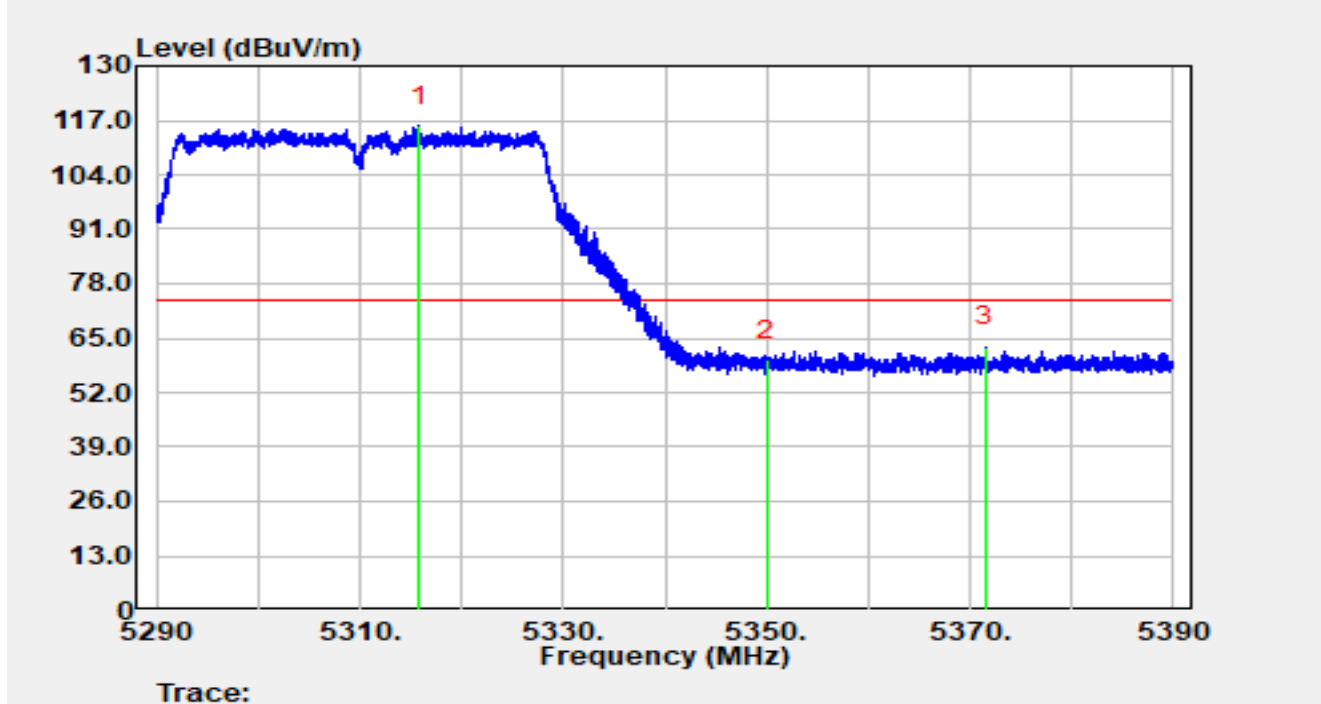


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5315.83	99.77	15.81	115.58	N/A	N/A	Peak
2		5350.00	44.01	15.72	59.74	-14.26	74.00	Peak
3	*	5371.47	46.92	15.91	62.83	-11.17	74.00	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac- VHT40 at 5310 MHz		

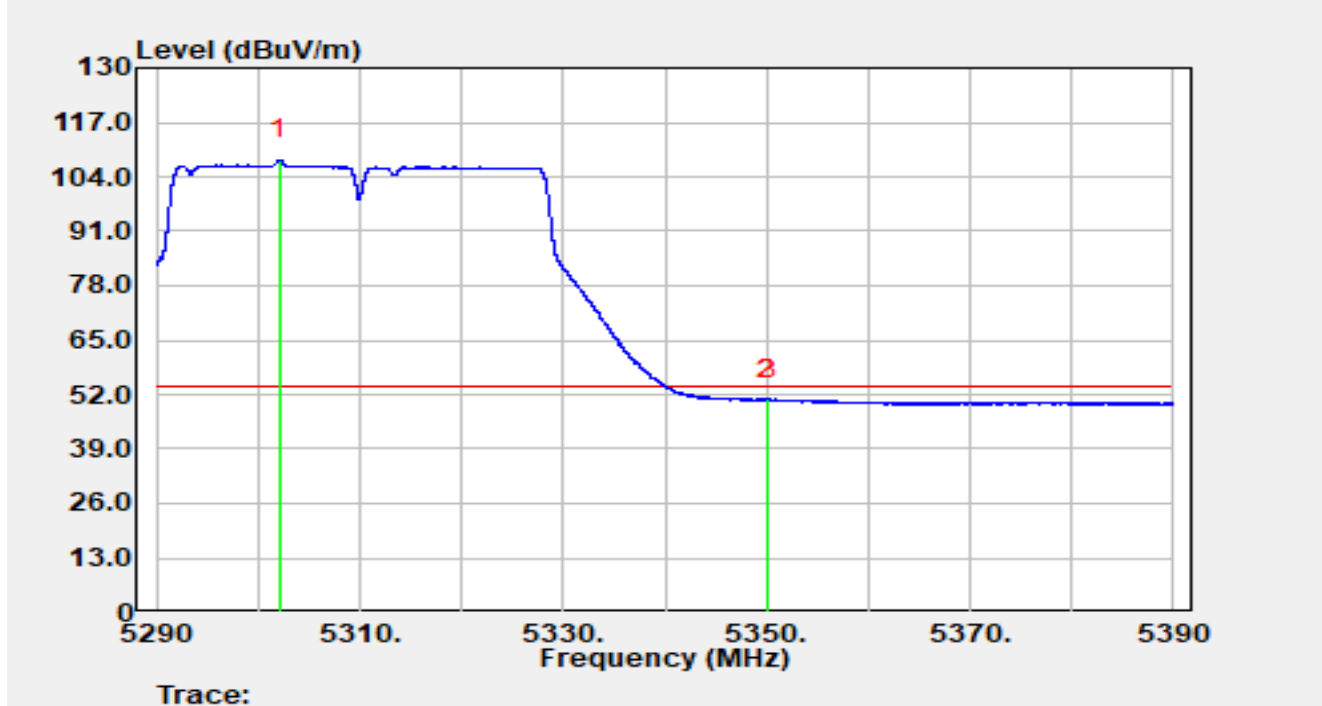


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5302.02	92.06	15.86	107.93	N/A	N/A	Average
2		5350.00	35.03	15.72	50.75	-3.25	54.00	Average
3	*	5350.12	35.17	15.73	50.90	-3.10	54.00	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac- VHT40 at 5310 MHz		

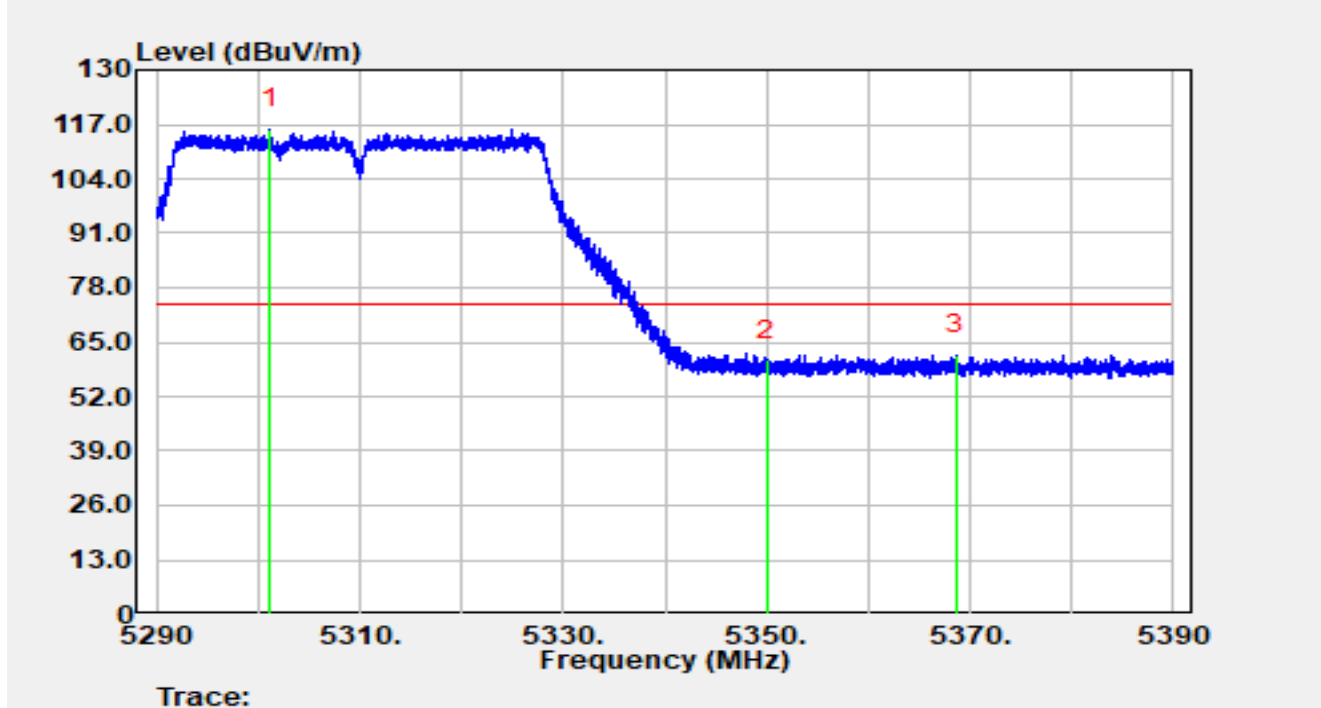


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5301.14	100.10	15.87	115.97	N/A	N/A	Peak
2		5350.00	45.04	15.72	60.76	-13.24	74.00	Peak
3	*	5368.58	46.12	15.89	62.01	-11.99	74.00	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac- VHT40 at 5310 MHz		

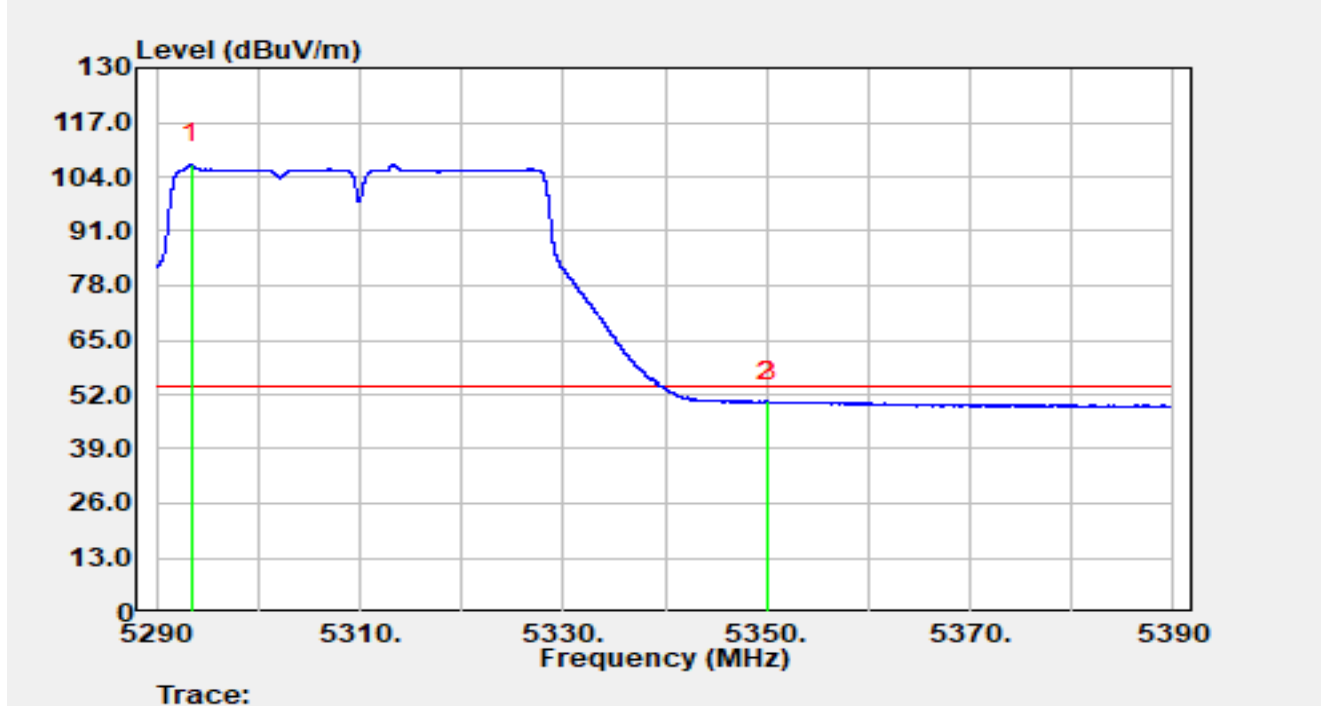


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5293.42	91.17	15.87	107.04	N/A	N/A	Average
2		5350.00	34.44	15.72	50.16	-3.84	54.00	Average
3	*	5350.17	34.57	15.73	50.30	-3.70	54.00	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac- VHT40 at 5510 MHz		

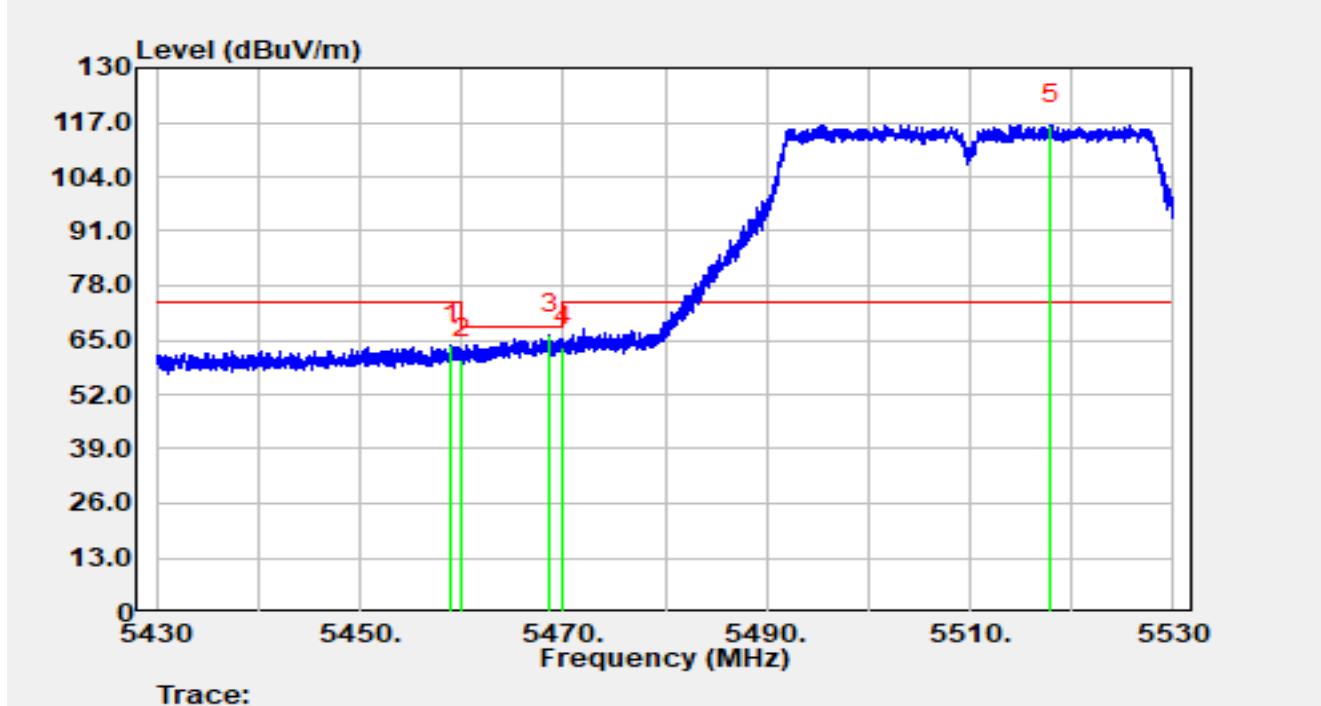


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.02	47.91	16.01	63.91	-10.09	74.00	Peak
2		5460.00	44.48	16.00	60.48	-7.72	68.20	Peak
3	*	5468.67	50.35	15.95	66.30	-1.90	68.20	Peak
4		5470.00	47.48	15.97	63.45	-4.75	68.20	Peak
5		5517.91	100.20	16.28	116.48	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac- VHT40 at 5510 MHz		

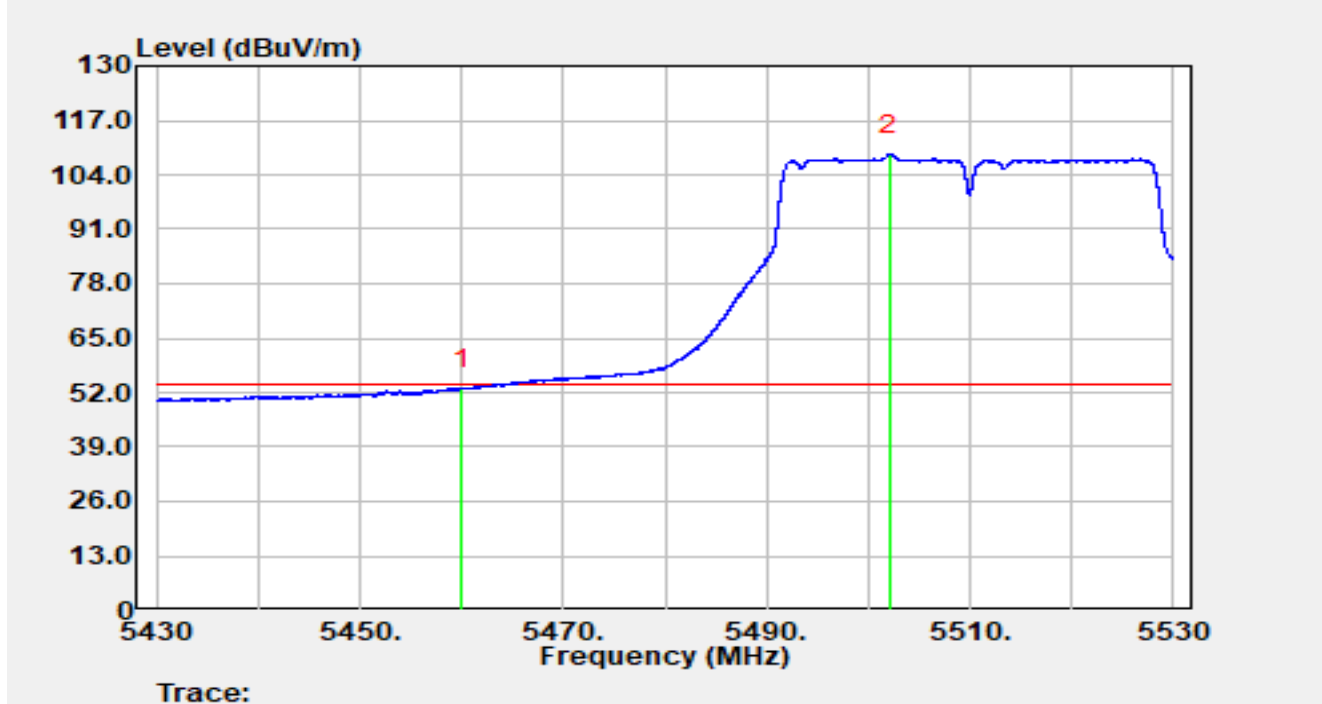


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.00	36.90	16.00	52.90	-1.10	54.00	Average
2		5502.04	92.48	16.30	108.78	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac- VHT40 at 5510 MHz		

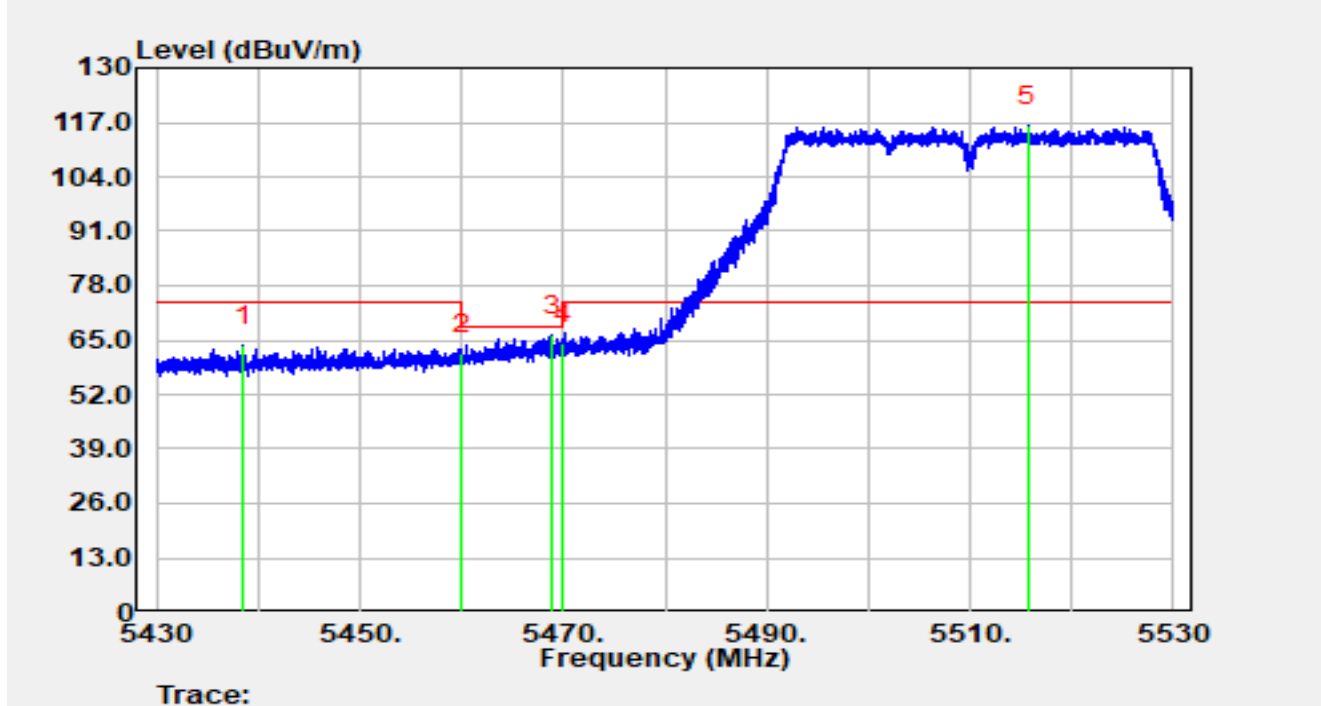


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5438.48	47.84	15.75	63.59	-10.41	74.00	Peak
2		5460.00	45.76	16.00	61.76	-6.44	68.20	Peak
3	*	5468.96	50.22	15.96	66.18	-2.02	68.20	Peak
4		5470.00	48.29	15.97	64.26	-3.94	68.20	Peak
5		5515.69	99.80	16.28	116.08	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac- VHT40 at 5510 MHz		

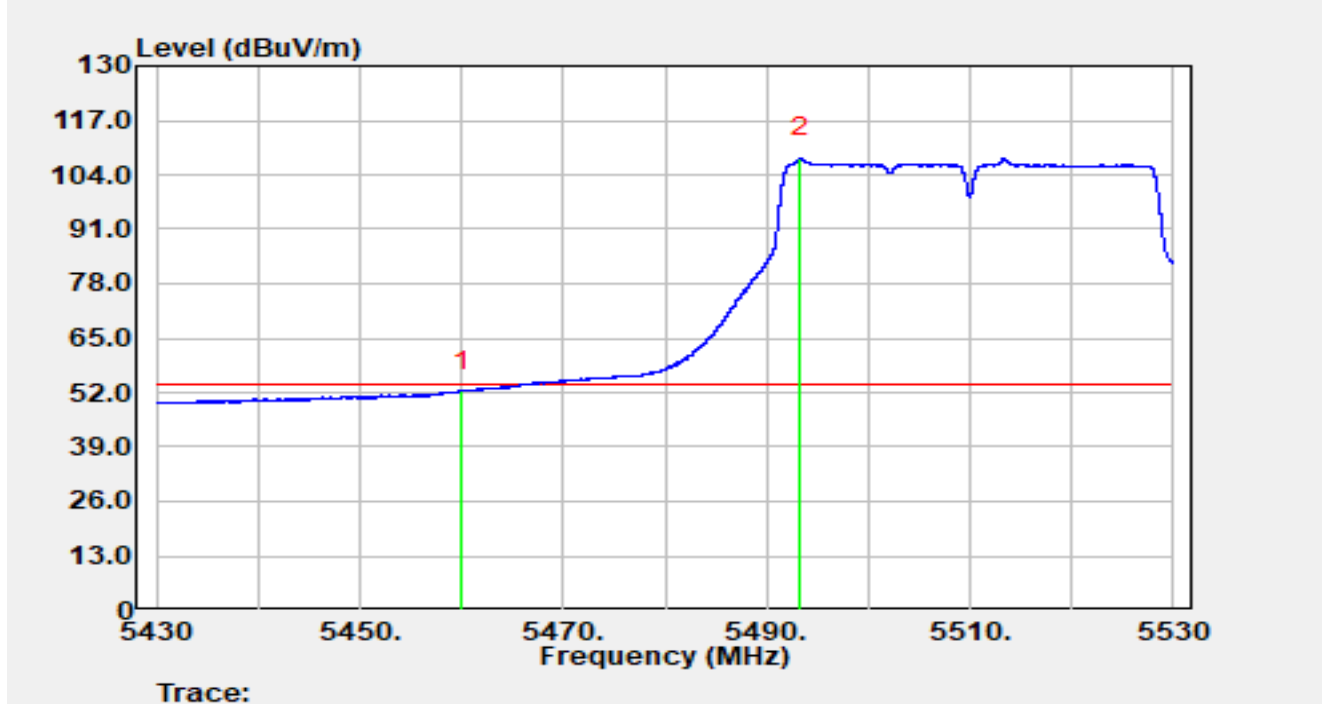


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.00	36.36	16.00	52.36	-1.64	54.00	Average
2		5493.35	91.83	16.23	108.06	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac- VHT40 at 5670 MHz		

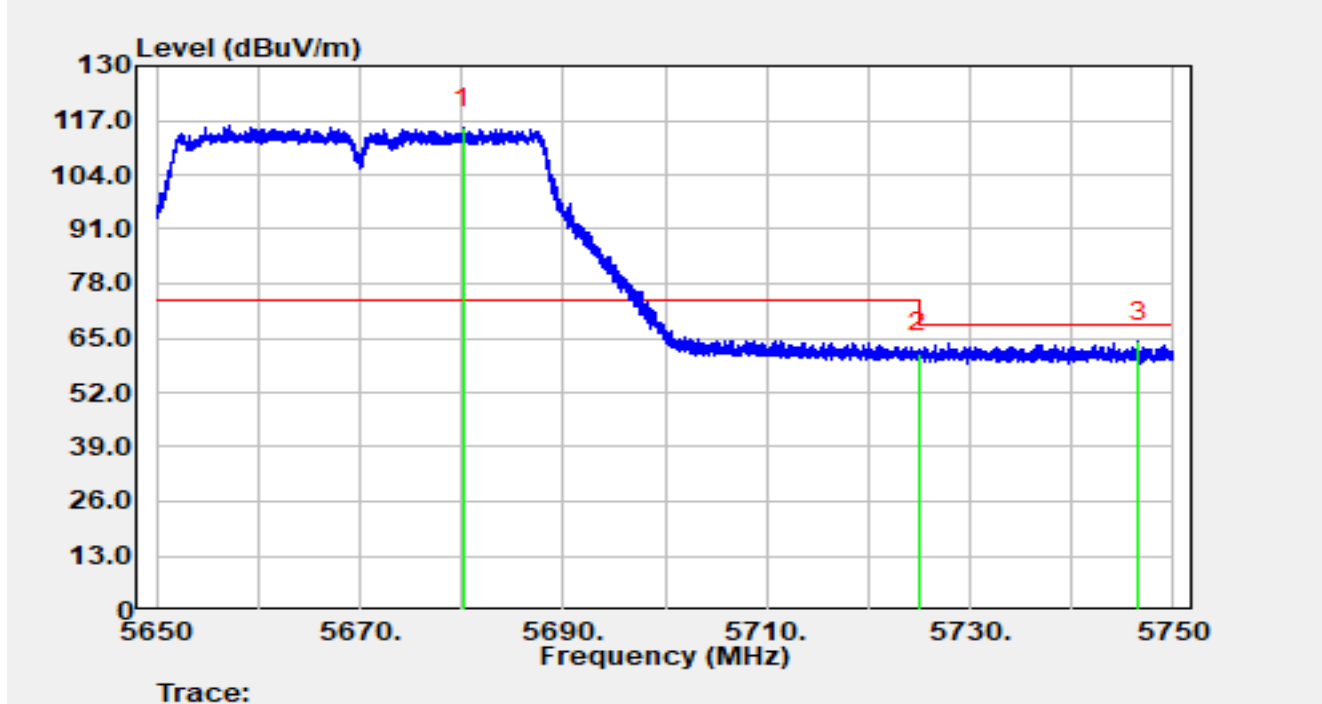


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5680.16	98.26	17.00	115.26	N/A	N/A	Peak
2		5725.00	44.57	16.98	61.55	-6.65	68.20	Peak
3	*	5746.58	47.12	17.00	64.11	-4.09	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5670 MHz		

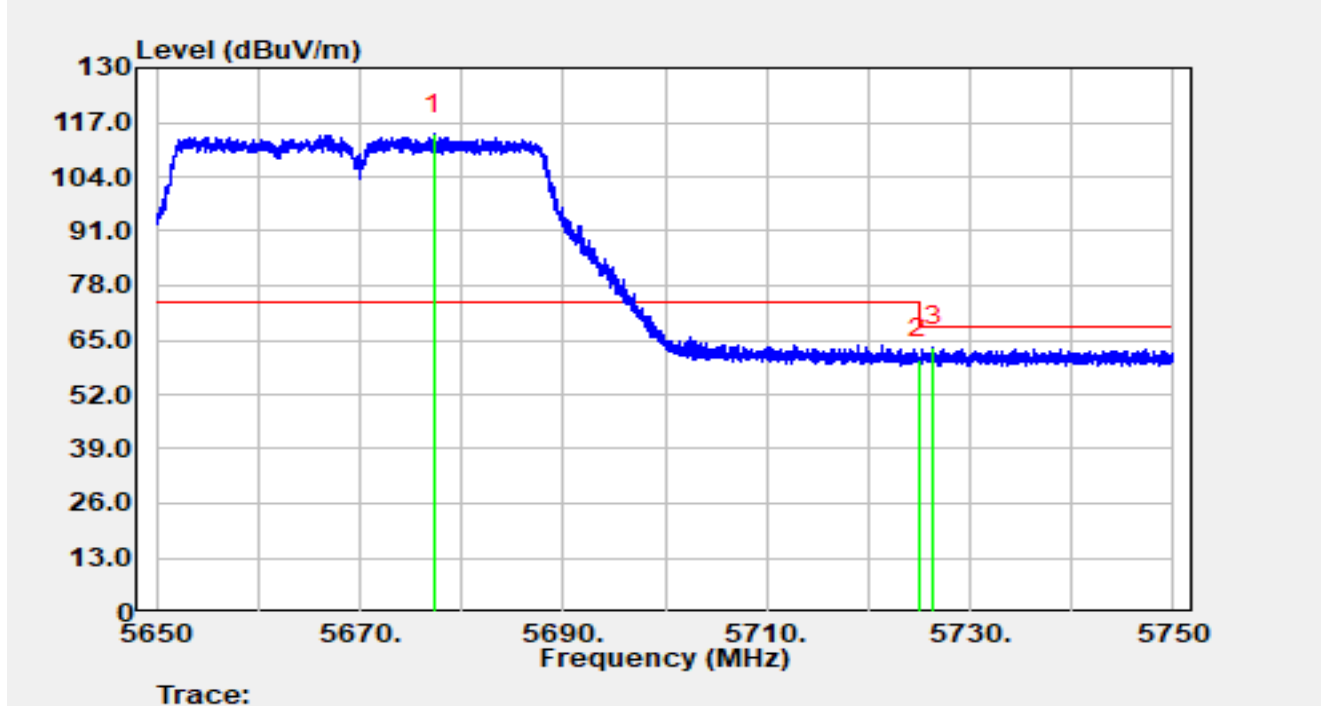


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5677.26	97.23	16.98	114.21	N/A	N/A	Peak
2		5725.00	43.53	16.98	60.50	-7.70	68.20	Peak
3	*	5726.38	46.38	16.97	63.35	-4.85	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5755 MHz		

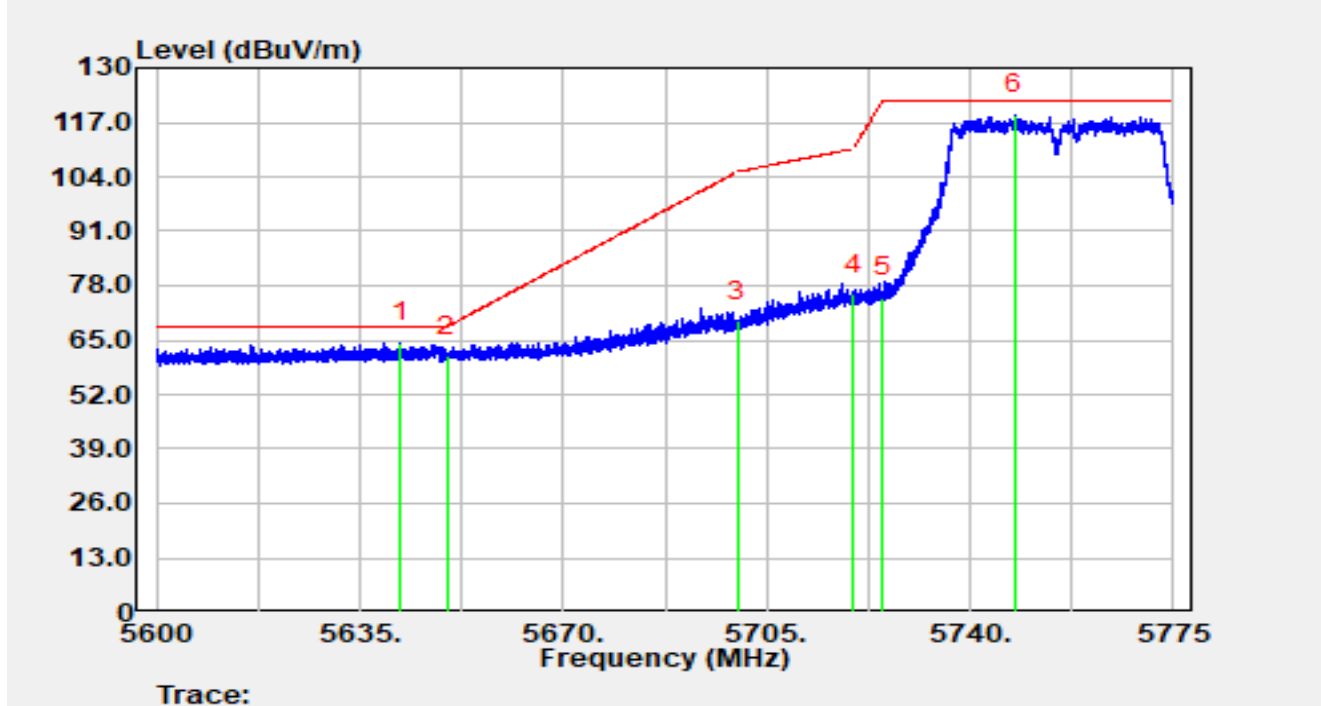


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5641.97	47.74	16.76	64.50	-3.70	68.20	Peak
2		5650.00	44.52	16.79	61.31	-6.89	68.20	Peak
3		5700.00	52.40	17.03	69.44	-35.76	105.20	Peak
4		5720.00	58.87	16.98	75.85	-34.95	110.80	Peak
5		5725.00	58.21	16.98	75.19	-47.01	122.20	Peak
6		5747.74	101.92	17.01	118.93	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5755 MHz		

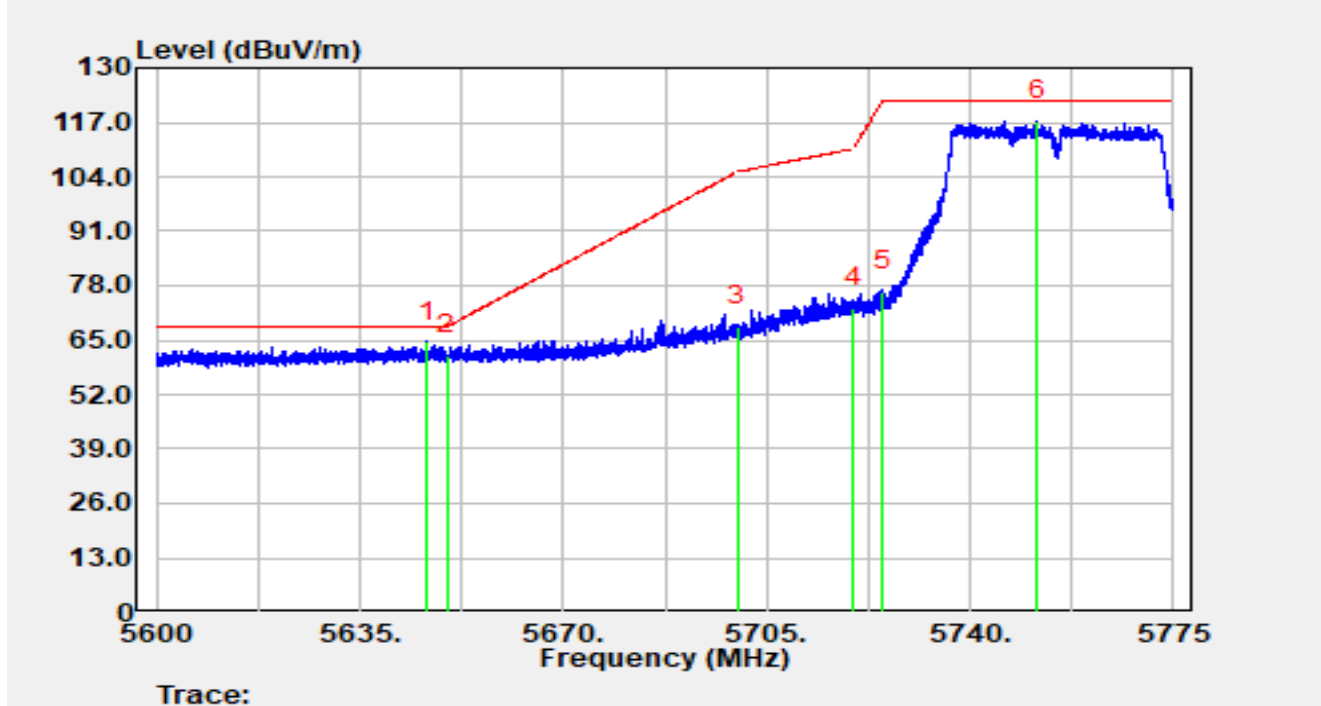


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5646.48	47.84	16.78	64.62	-3.58	68.20	Peak
2		5650.00	44.55	16.79	61.34	-6.86	68.20	Peak
3		5700.00	51.20	17.03	68.23	-36.97	105.20	Peak
4		5720.00	55.75	16.98	72.74	-38.06	110.80	Peak
5		5725.00	59.63	16.98	76.61	-45.59	122.20	Peak
6		5751.62	100.38	17.04	117.42	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5795 MHz		

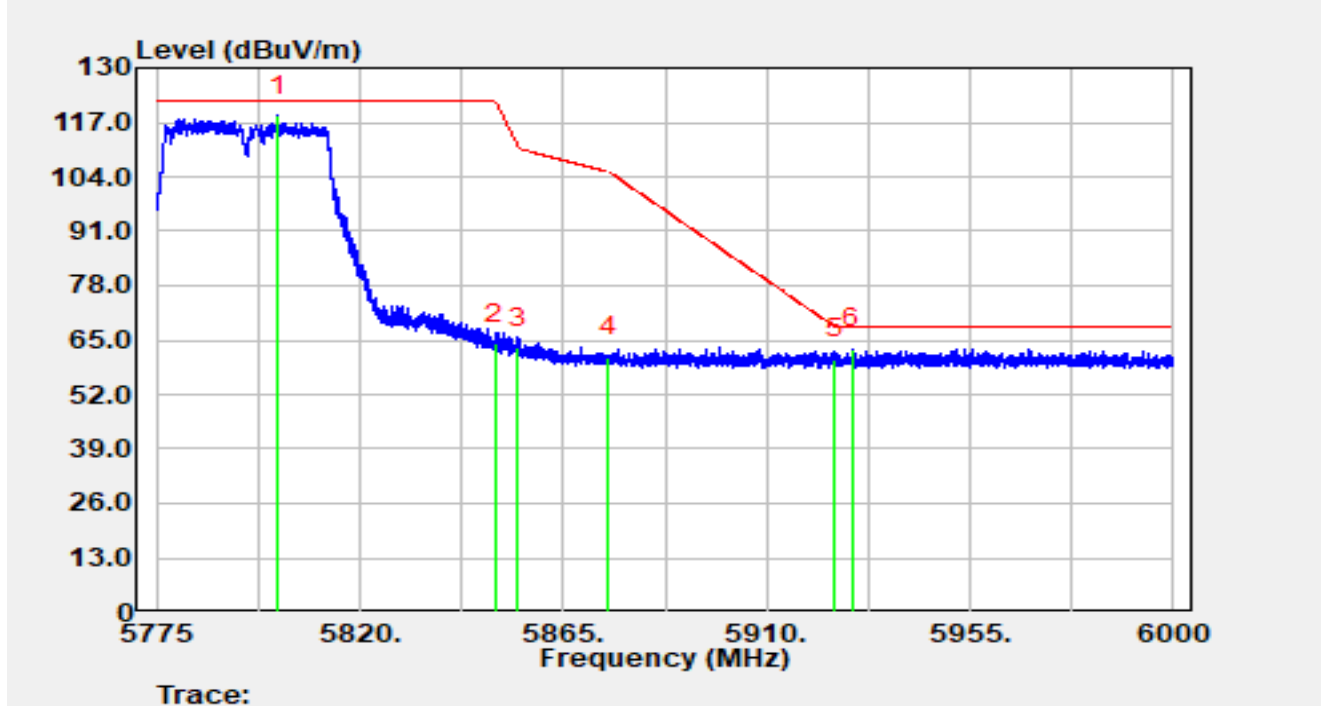


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5801.78	101.13	17.34	118.47	N/A	N/A	Peak
2		5850.00	46.64	17.56	64.20	-58.00	122.20	Peak
3		5855.00	45.70	17.52	63.22	-47.58	110.80	Peak
4		5875.00	43.31	17.61	60.92	-44.28	105.20	Peak
5		5925.00	42.86	17.49	60.35	-7.85	68.20	Peak
6	*	5928.95	45.50	17.48	62.98	-5.22	68.20	Peak

Notes:

- " * " indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT40 at 5795 MHz		

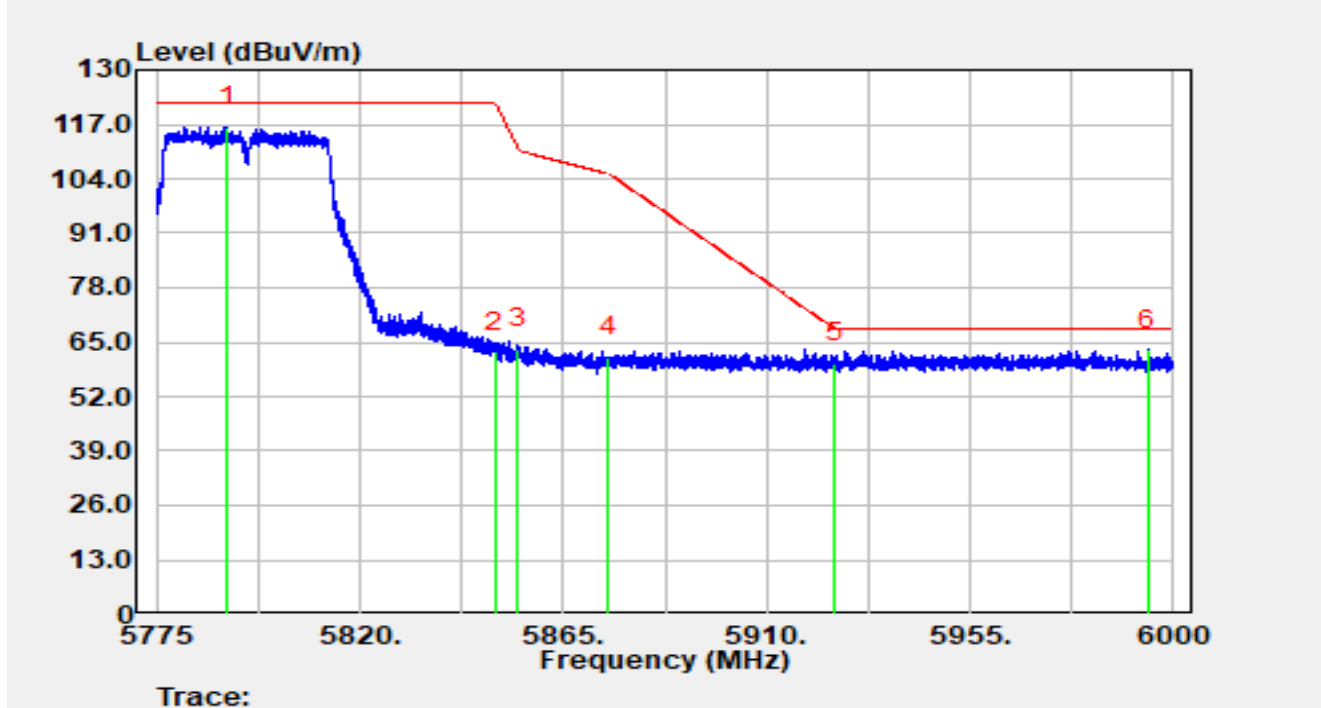


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5790.75	99.05	17.25	116.30	N/A	N/A	Peak
2		5850.00	45.00	17.56	62.57	-59.63	122.20	Peak
3		5855.00	45.88	17.52	63.41	-47.39	110.80	Peak
4		5875.00	43.73	17.61	61.34	-43.86	105.20	Peak
5		5925.00	42.43	17.49	59.91	-8.29	68.20	Peak
6	*	5994.40	45.73	17.44	63.17	-5.03	68.20	Peak

Notes:

- " * " indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

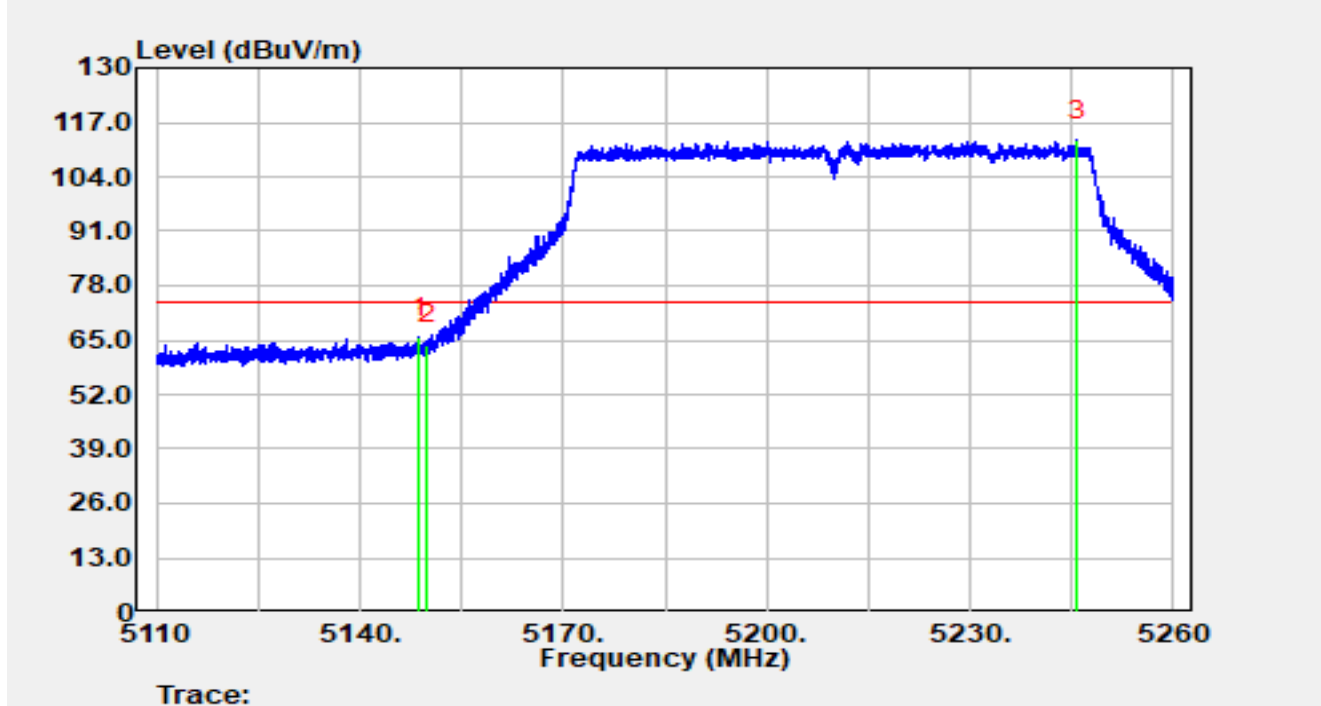


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.73	49.58	15.99	65.57	-8.43	74.00	Peak
2		5150.00	48.02	15.99	64.01	-9.99	74.00	Peak
3		5245.77	96.70	15.95	112.66	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

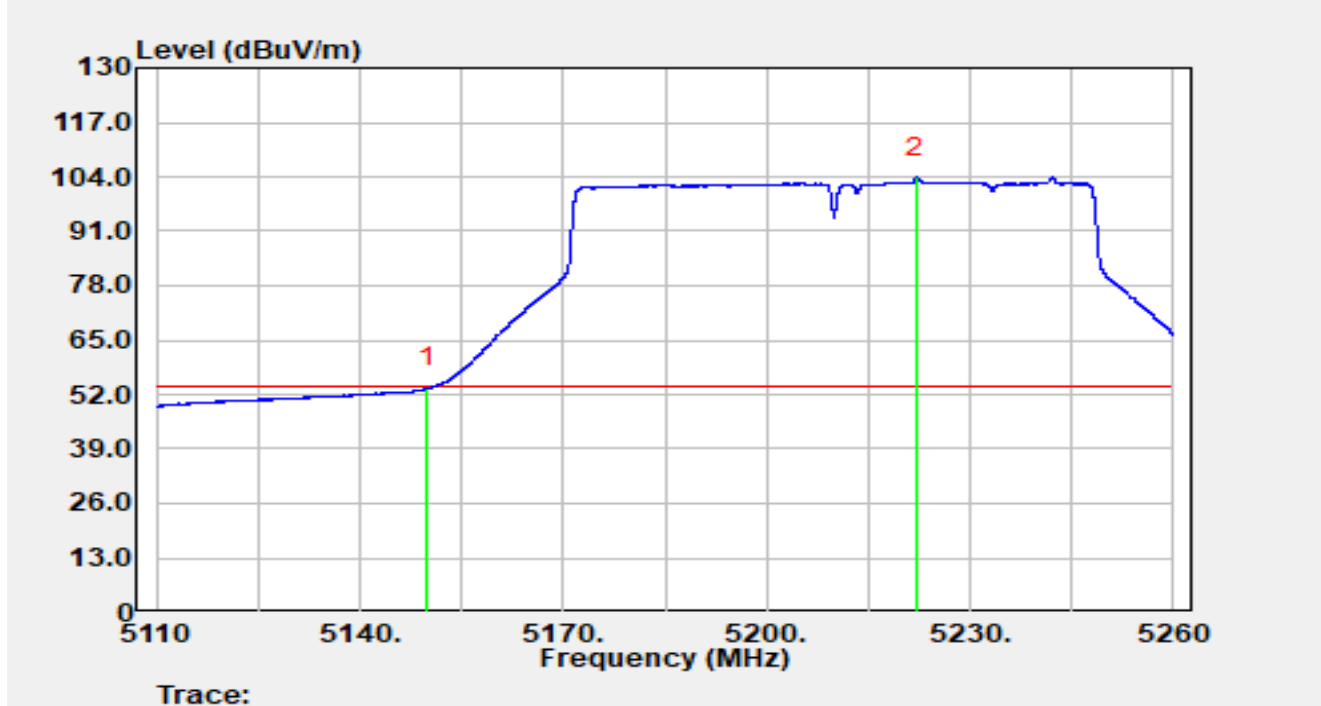


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.00	37.51	15.99	53.51	-0.49	54.00	Average
2		5222.13	87.80	16.13	103.94	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

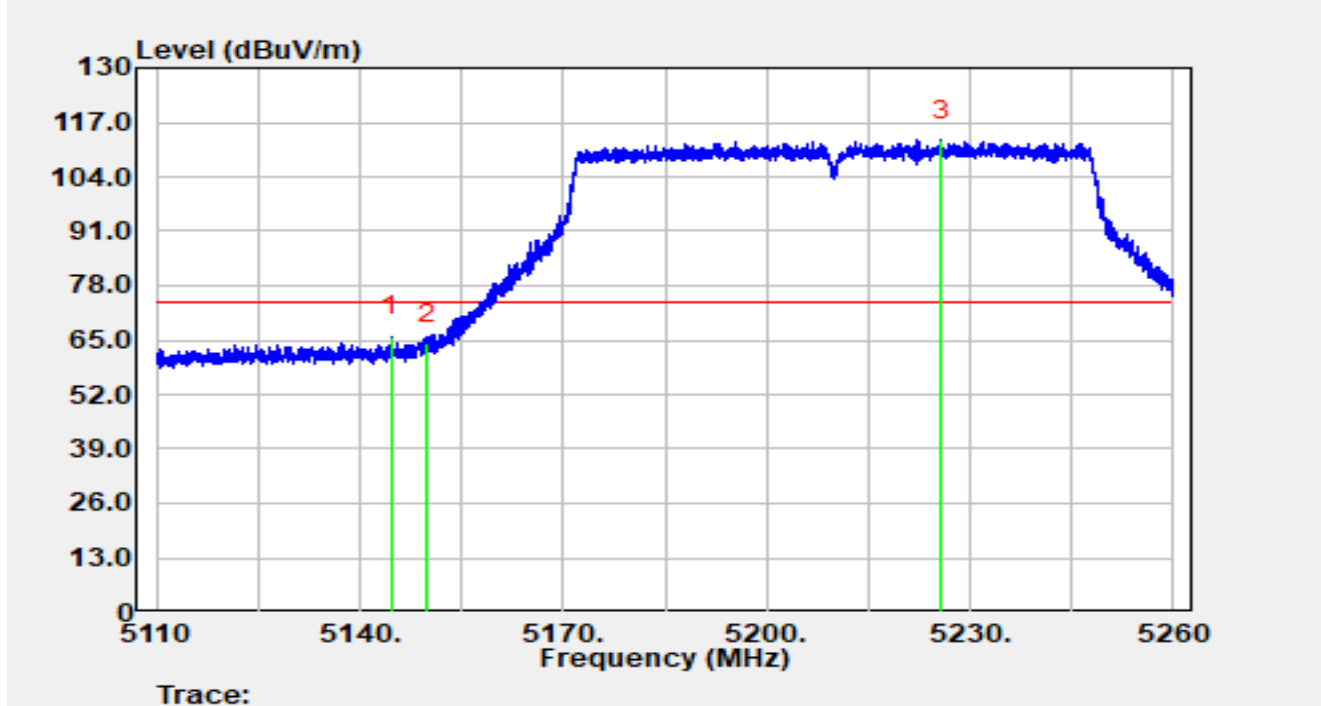


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5144.65	49.88	15.97	65.85	-8.15	74.00	Peak
2		5150.00	48.10	15.99	64.10	-9.90	74.00	Peak
3		5225.77	96.59	16.22	112.80	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

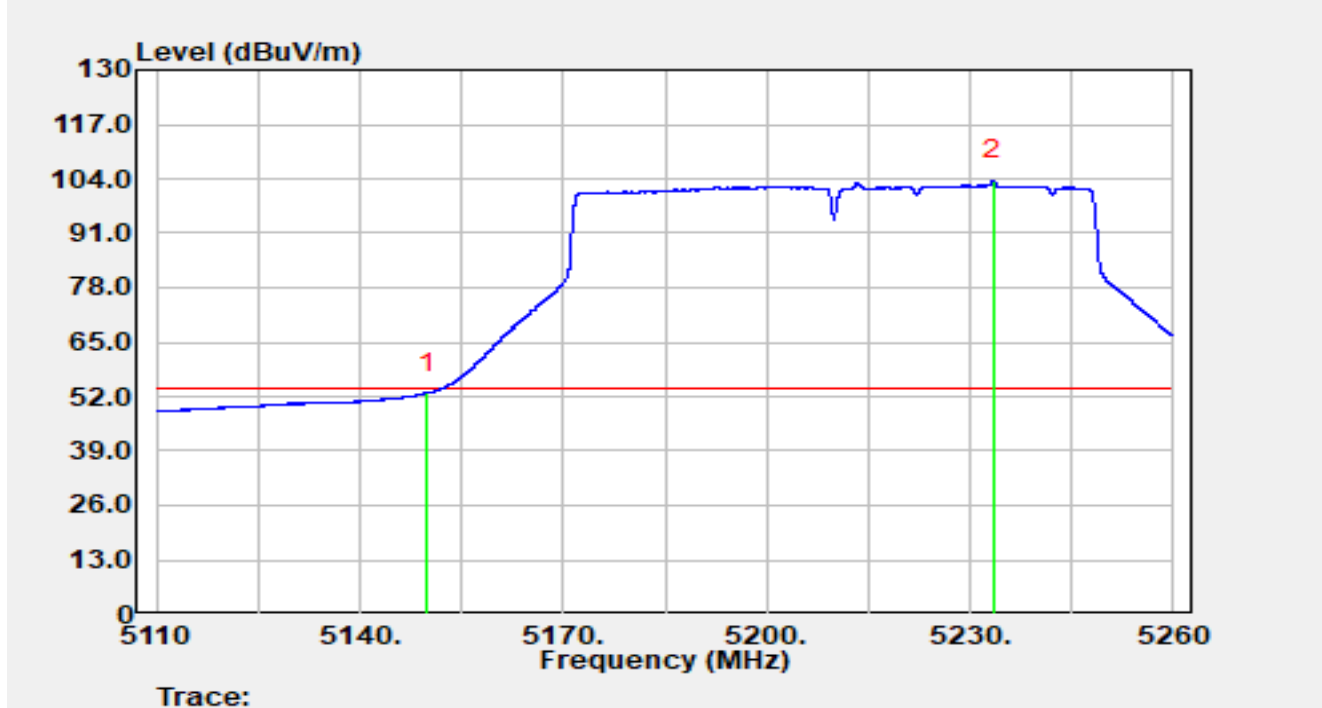


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.00	36.86	15.99	52.85	-1.15	54.00	Average
2		5233.41	87.34	16.22	103.57	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

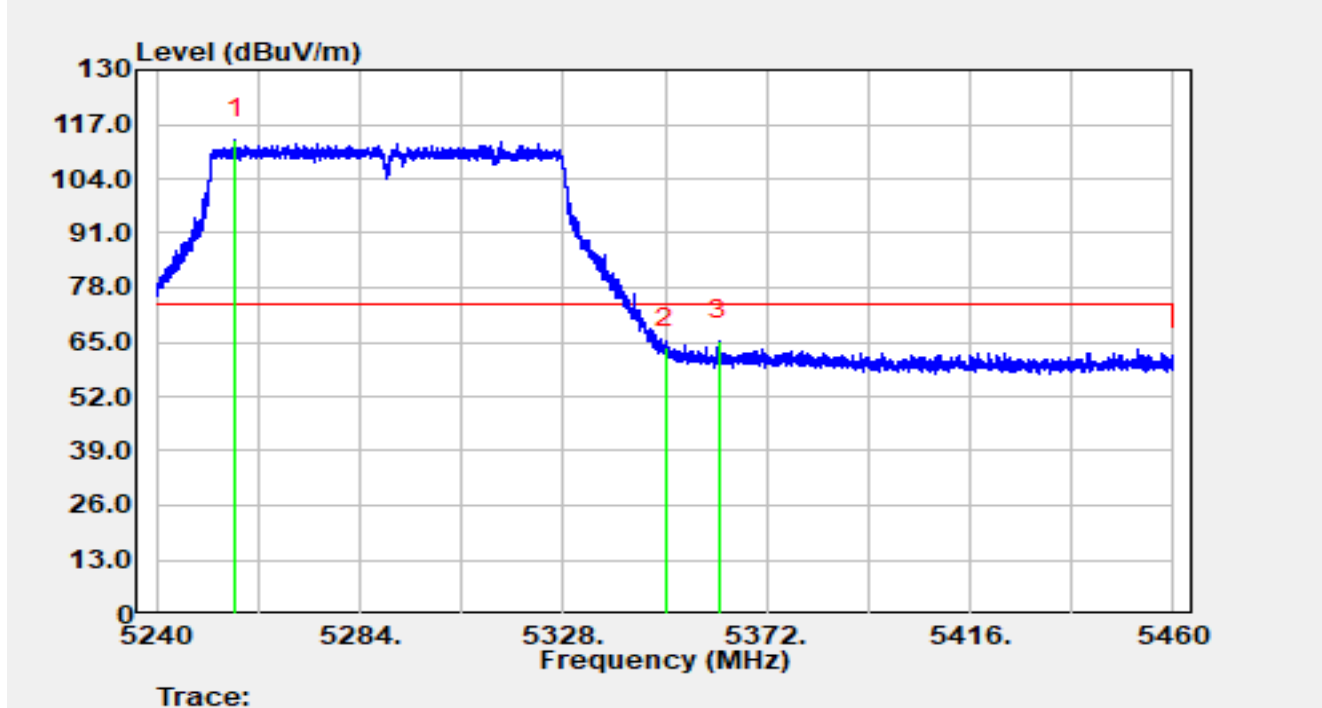


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5257.07	97.63	15.90	113.53	N/A	N/A	Peak
2		5350.00	47.86	15.72	63.58	-10.42	74.00	Peak
3	*	5361.73	49.50	15.83	65.33	-8.67	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

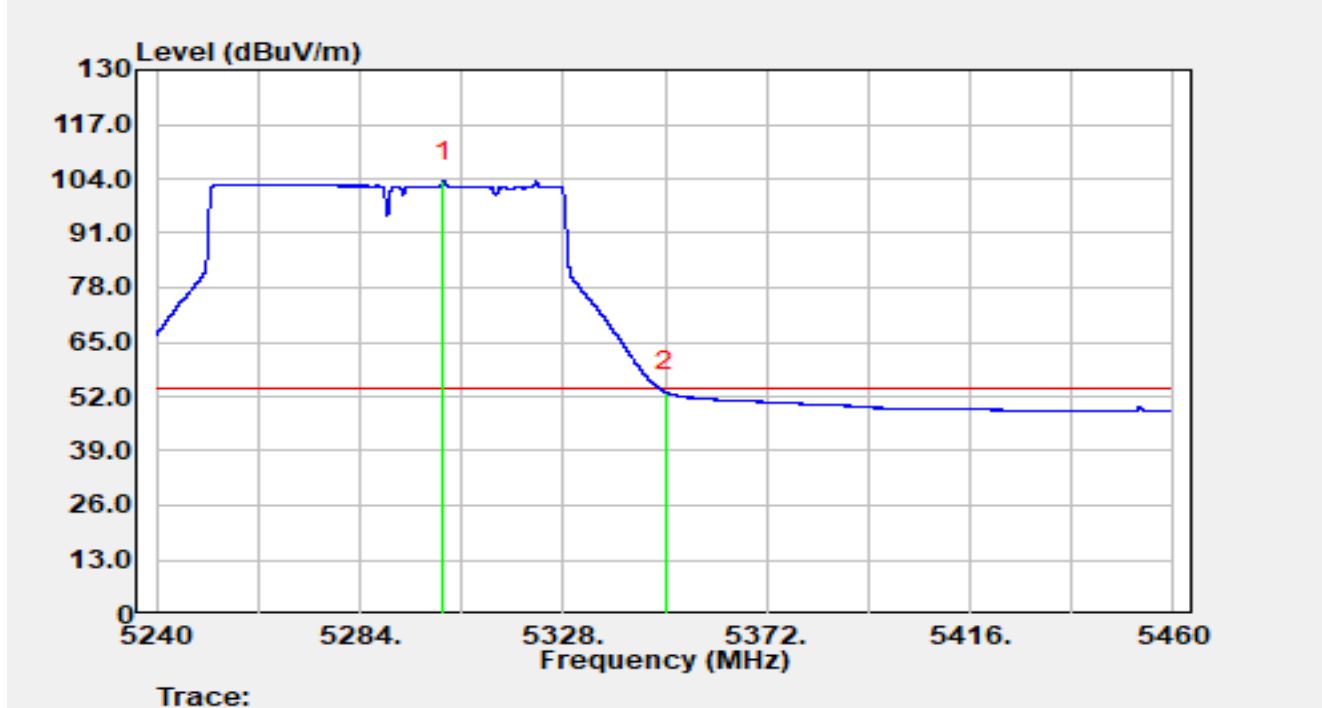


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5302.15	87.55	15.86	103.41	N/A	N/A	Average
2	*	5350.00	37.48	15.72	53.21	-0.79	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

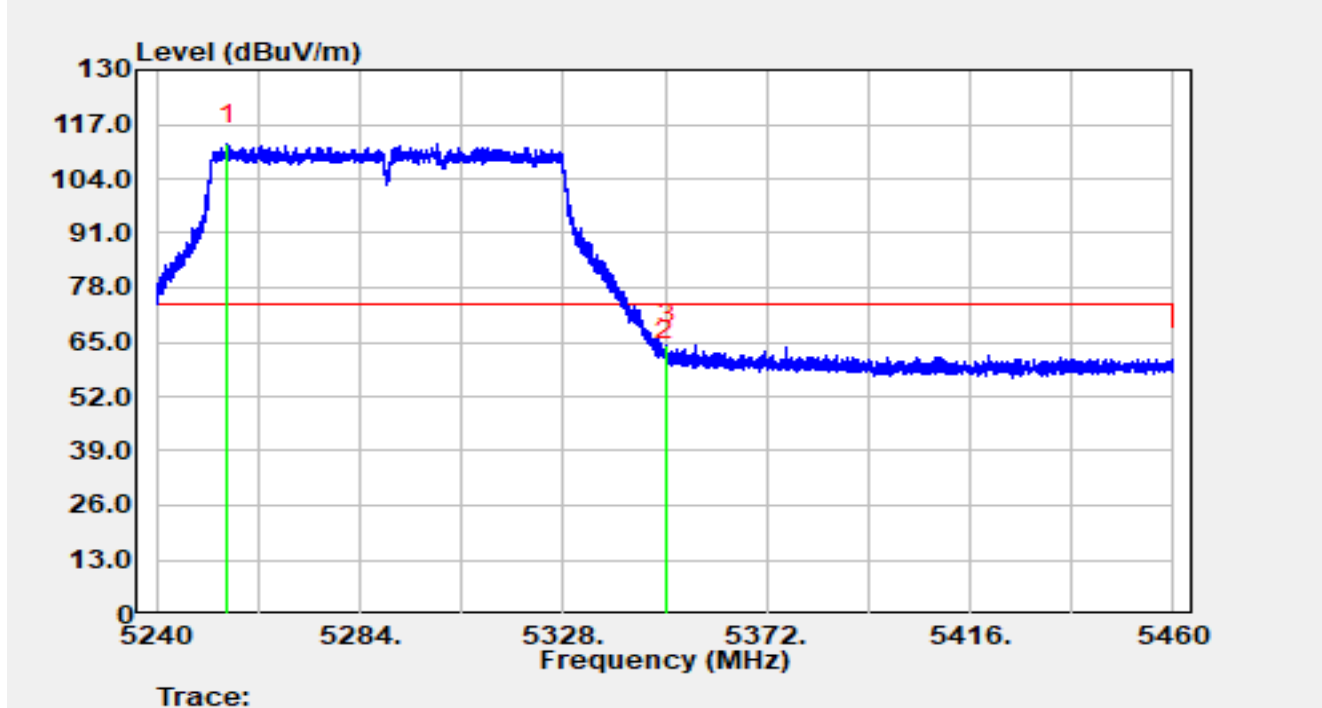


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5255.47	96.34	15.91	112.25	N/A	N/A	Peak
2		5350.00	44.87	15.72	60.59	-13.41	74.00	Peak
3	*	5350.37	48.62	15.73	64.35	-9.65	74.00	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

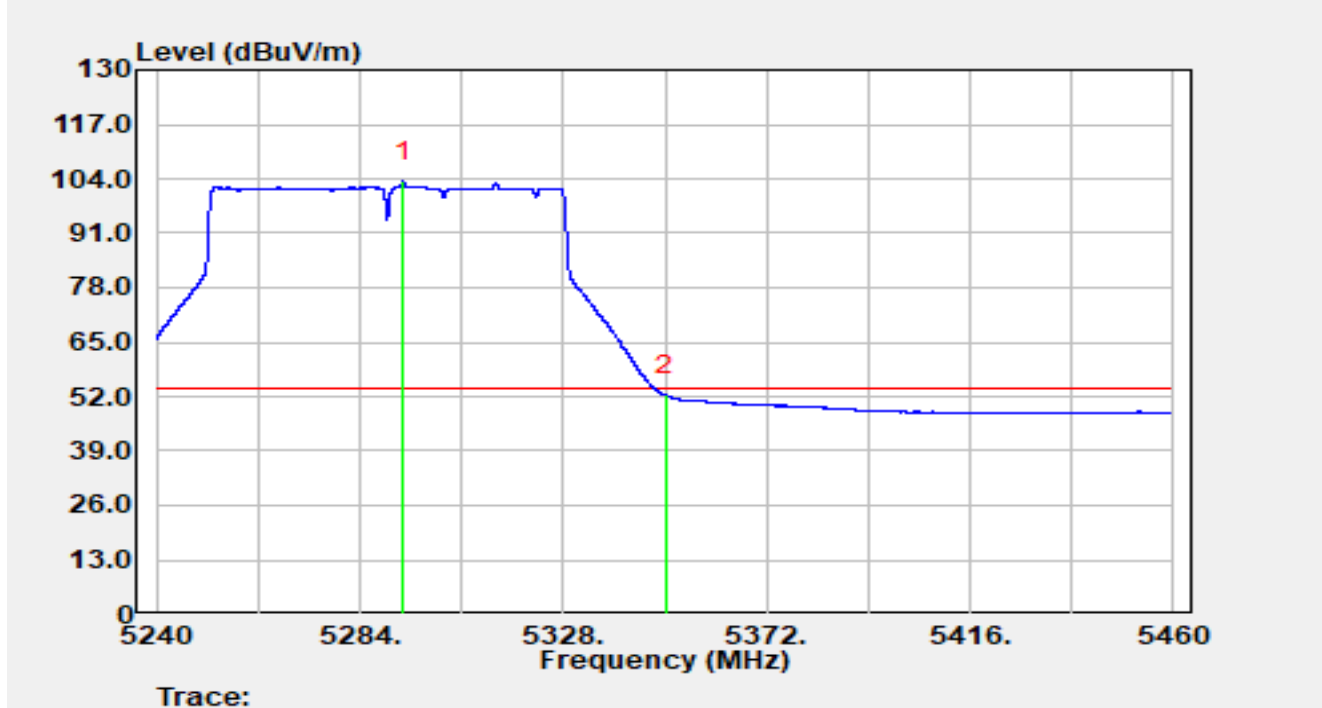


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5293.42	87.43	15.87	103.30	N/A	N/A	Average
2	*	5350.00	36.66	15.72	52.39	-1.61	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

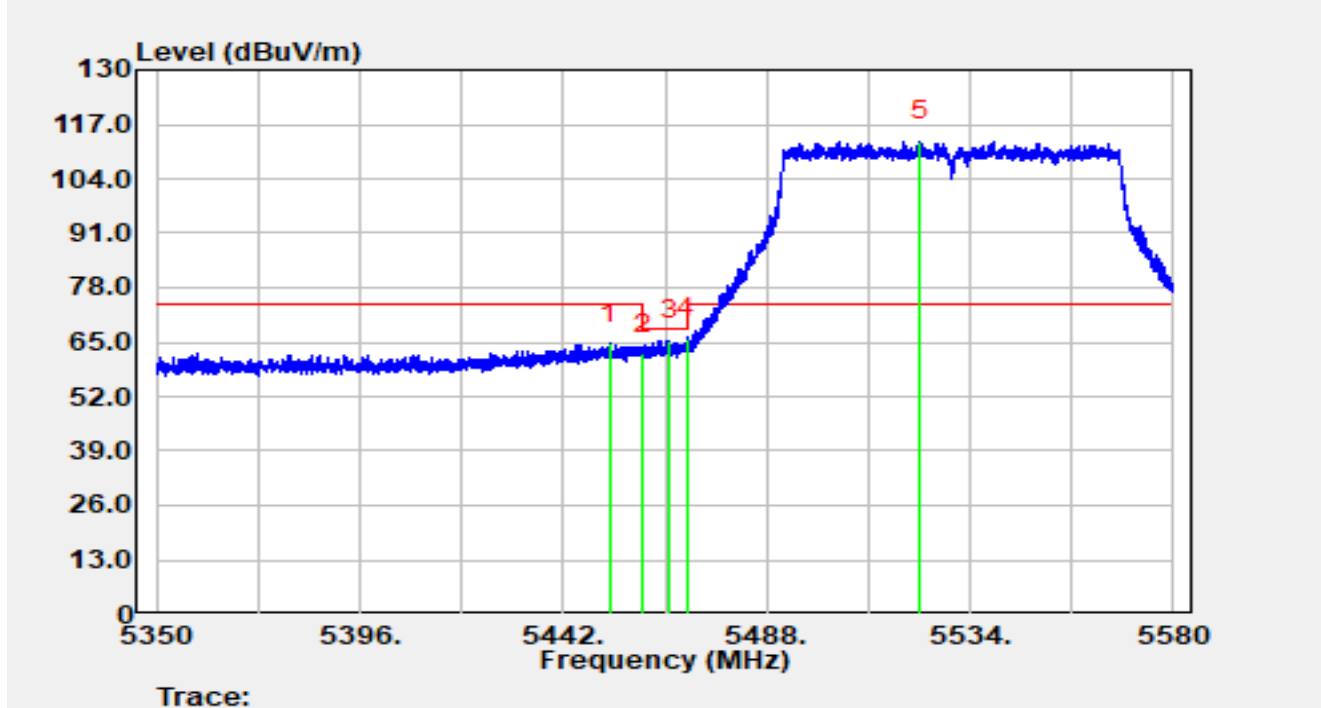


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5452.40	48.61	16.03	64.64	-9.36	74.00	Peak
2		5460.00	46.27	16.00	62.27	-5.93	68.20	Peak
3		5465.94	49.44	15.96	65.41	-2.79	68.20	Peak
4	*	5470.00	49.96	15.97	65.93	-2.27	68.20	Peak
5		5522.57	96.59	16.32	112.91	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

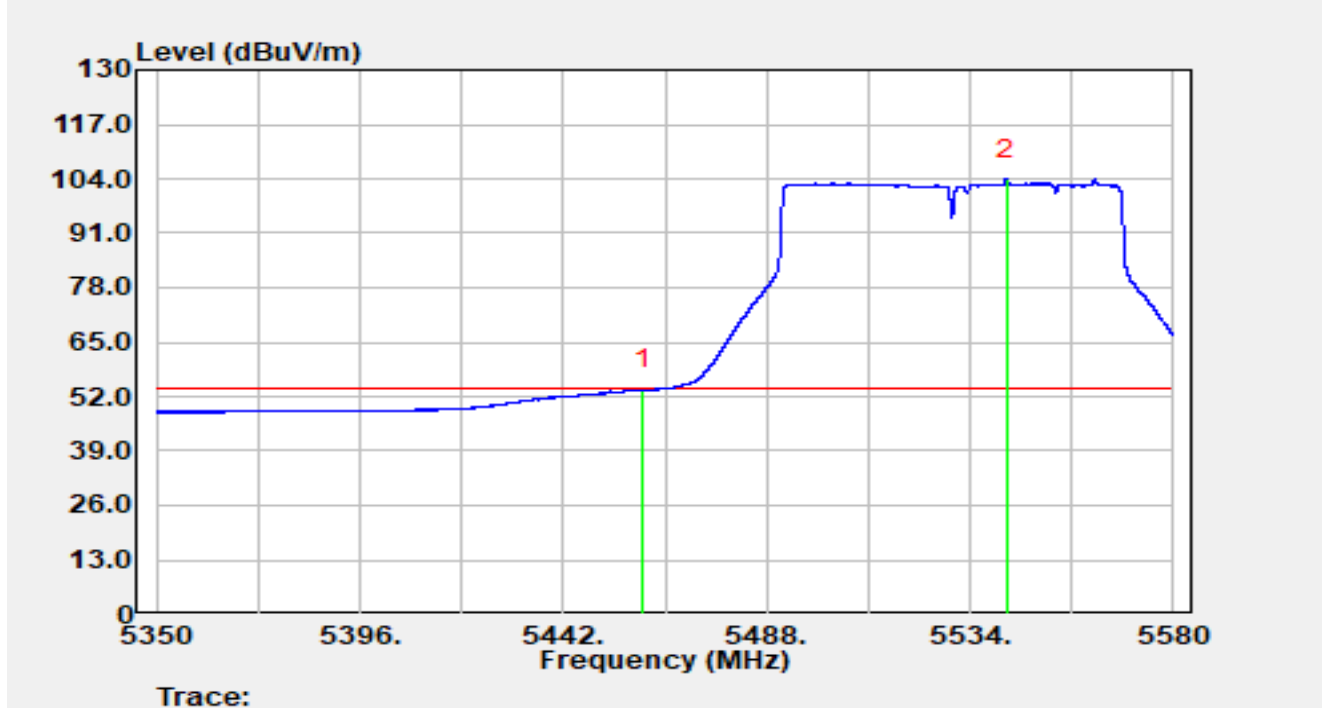


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.00	37.51	16.00	53.51	-0.49	54.00	Average
2		5542.17	87.40	16.54	103.94	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

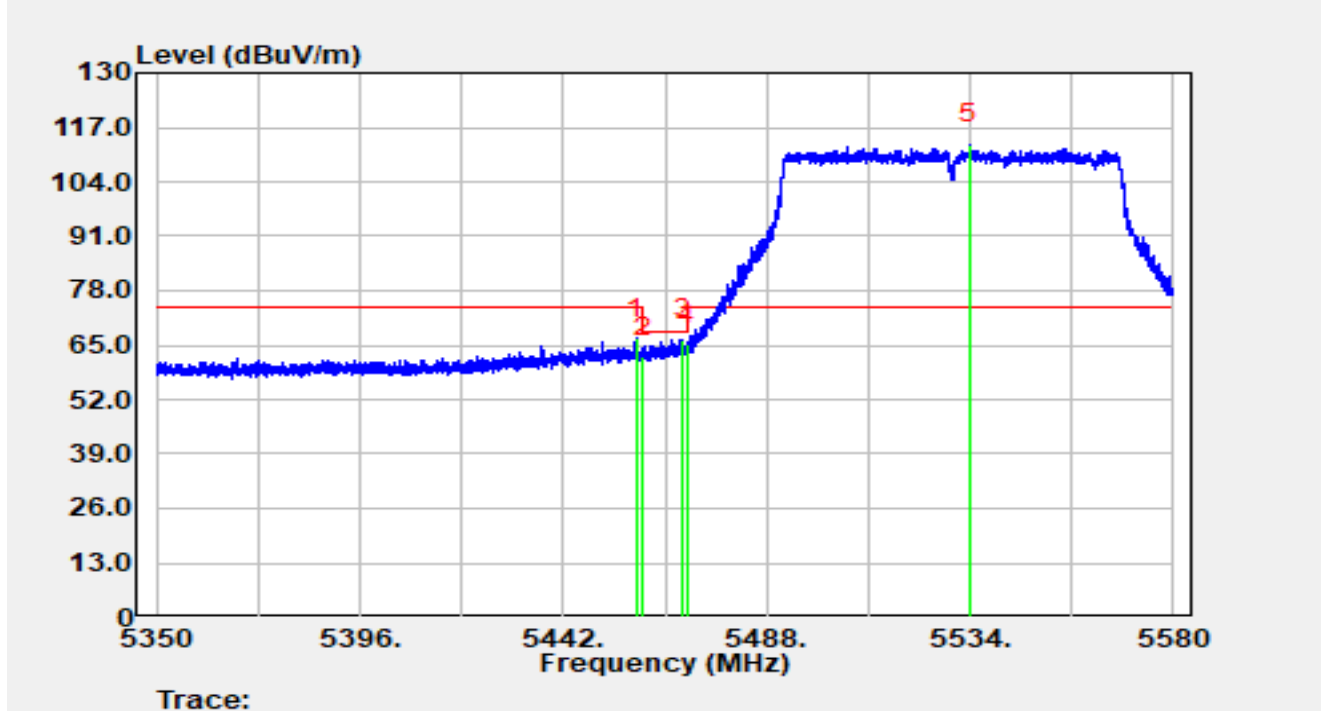


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.54	50.48	16.01	66.49	-7.51	74.00	Peak
2		5460.00	46.27	16.00	62.27	-5.93	68.20	Peak
3	*	5468.96	50.40	15.96	66.36	-1.84	68.20	Peak
4		5470.00	49.18	15.97	65.15	-3.05	68.20	Peak
5		5533.77	96.39	16.50	112.90	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

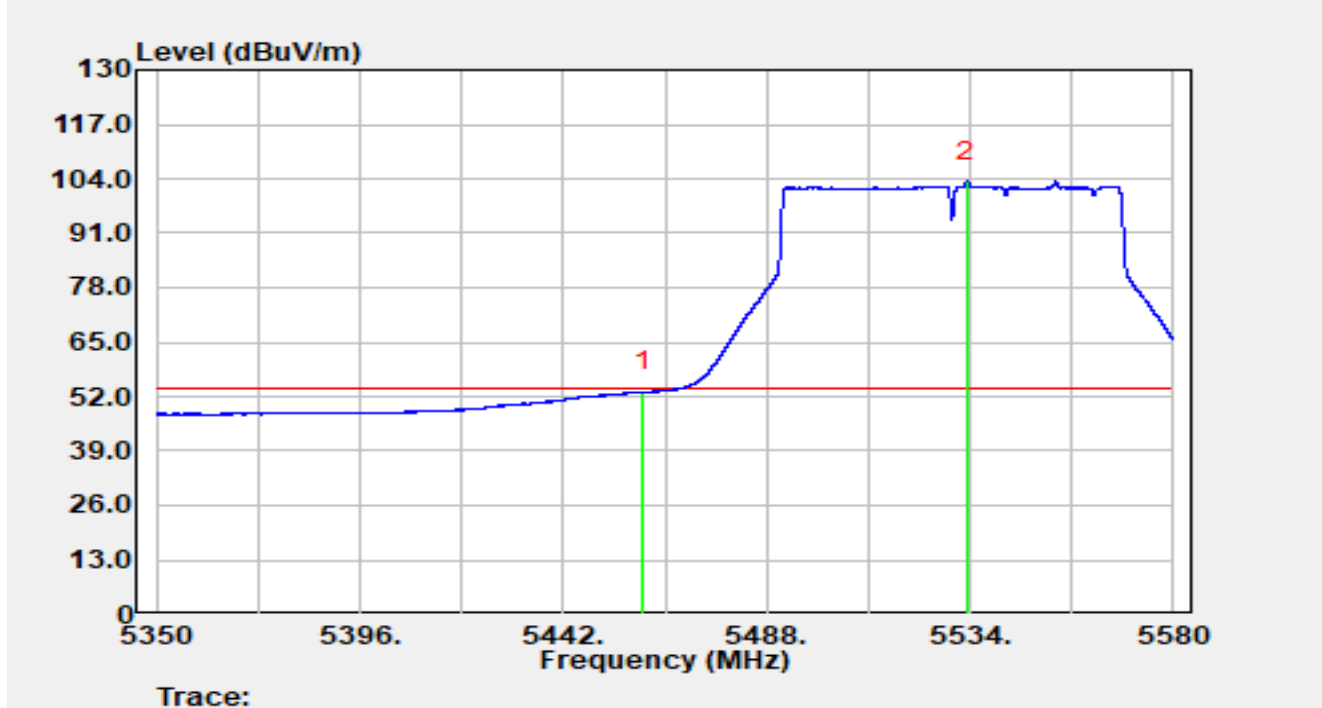


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.00	37.07	16.00	53.07	-0.93	54.00	Average
2		5533.38	86.94	16.50	103.44	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-30
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5610 MHz		

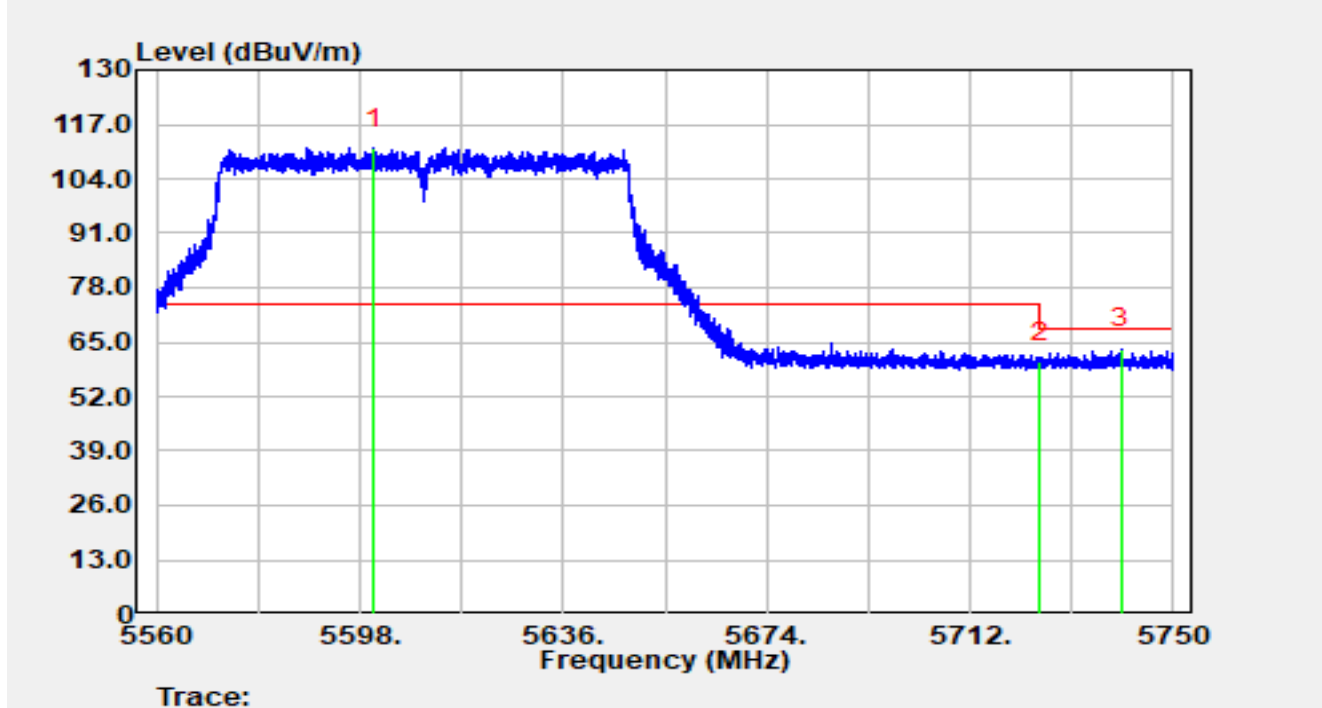


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5600.58	94.76	16.58	111.35	N/A	N/A	Peak
2		5725.00	43.25	16.98	60.23	-7.97	68.20	Peak
3	*	5740.16	46.36	16.96	63.32	-4.88	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-30
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5610 MHz		

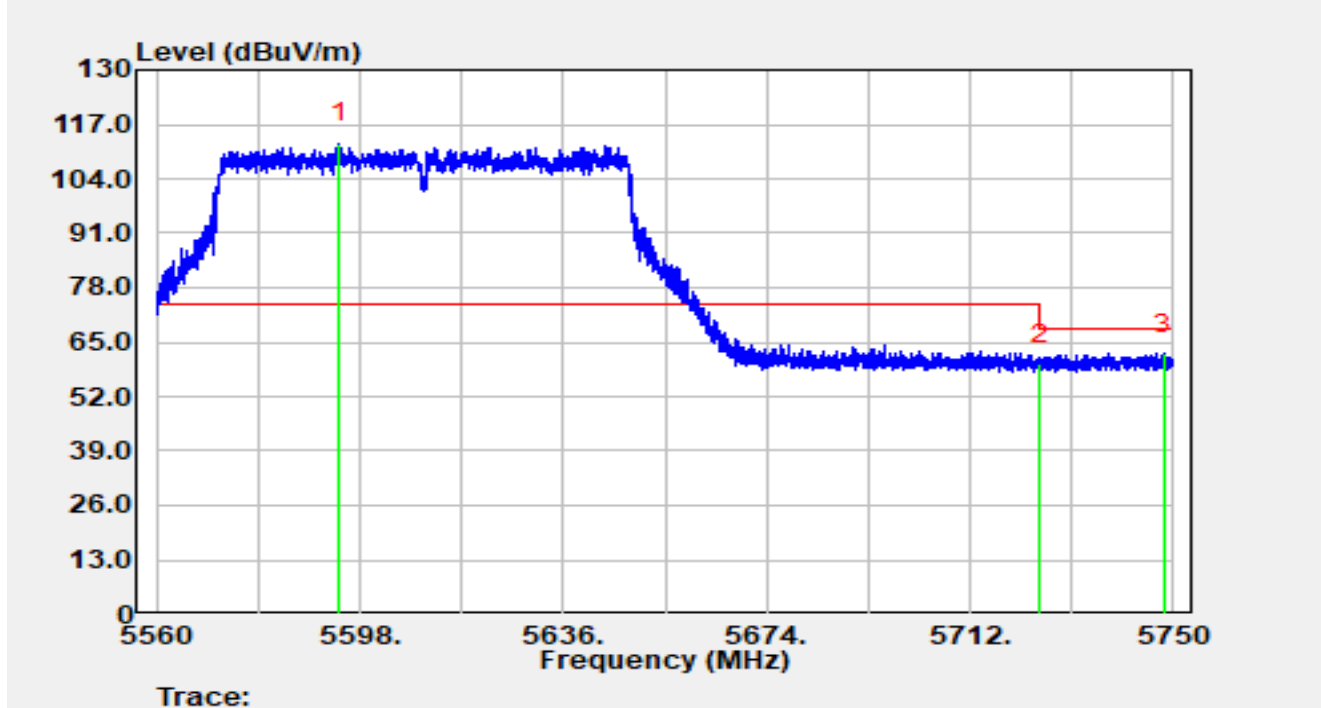


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5594.26	95.98	16.52	112.50	N/A	N/A	Peak
2		5725.00	42.77	16.98	59.74	-8.46	68.20	Peak
3	*	5748.14	45.27	17.01	62.28	-5.92	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-08-04
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5775 MHz		

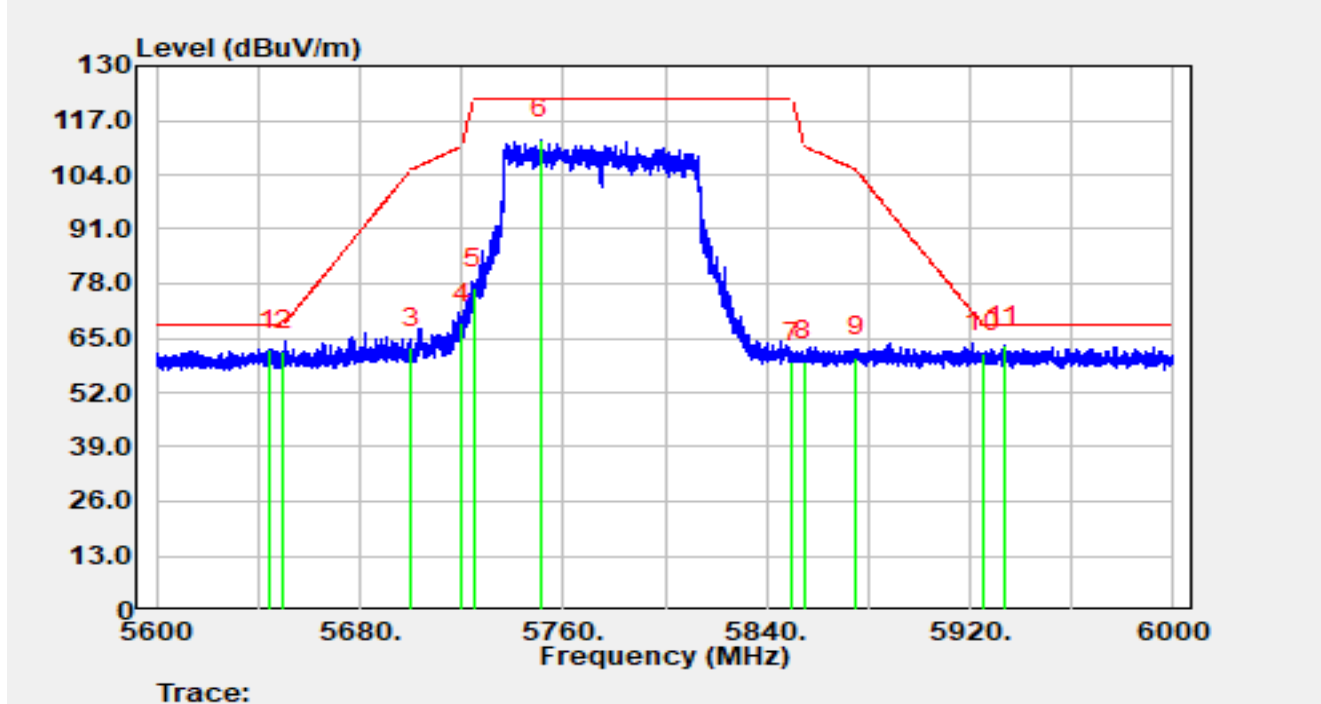


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5643.92	45.51	16.77	62.28	-5.92	68.20	Peak
2		5650.00	45.05	16.79	61.85	-6.35	68.20	Peak
3		5700.00	45.61	17.03	62.65	-42.55	105.20	Peak
4		5720.00	51.66	16.98	68.65	-42.15	110.80	Peak
5		5725.00	59.86	16.98	76.83	-45.37	122.20	Peak
6		5750.92	95.41	17.03	112.44	N/A	N/A	Peak
7		5850.00	41.61	17.56	59.17	-63.03	122.20	Peak
8		5855.00	41.96	17.52	59.48	-51.32	110.80	Peak
9		5875.00	42.83	17.61	60.44	-44.76	105.20	Peak
10		5925.00	43.84	17.49	61.32	-6.88	68.20	Peak
11	*	5933.24	45.63	17.52	63.15	-5.05	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-08-04
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT80 at 5775 MHz		

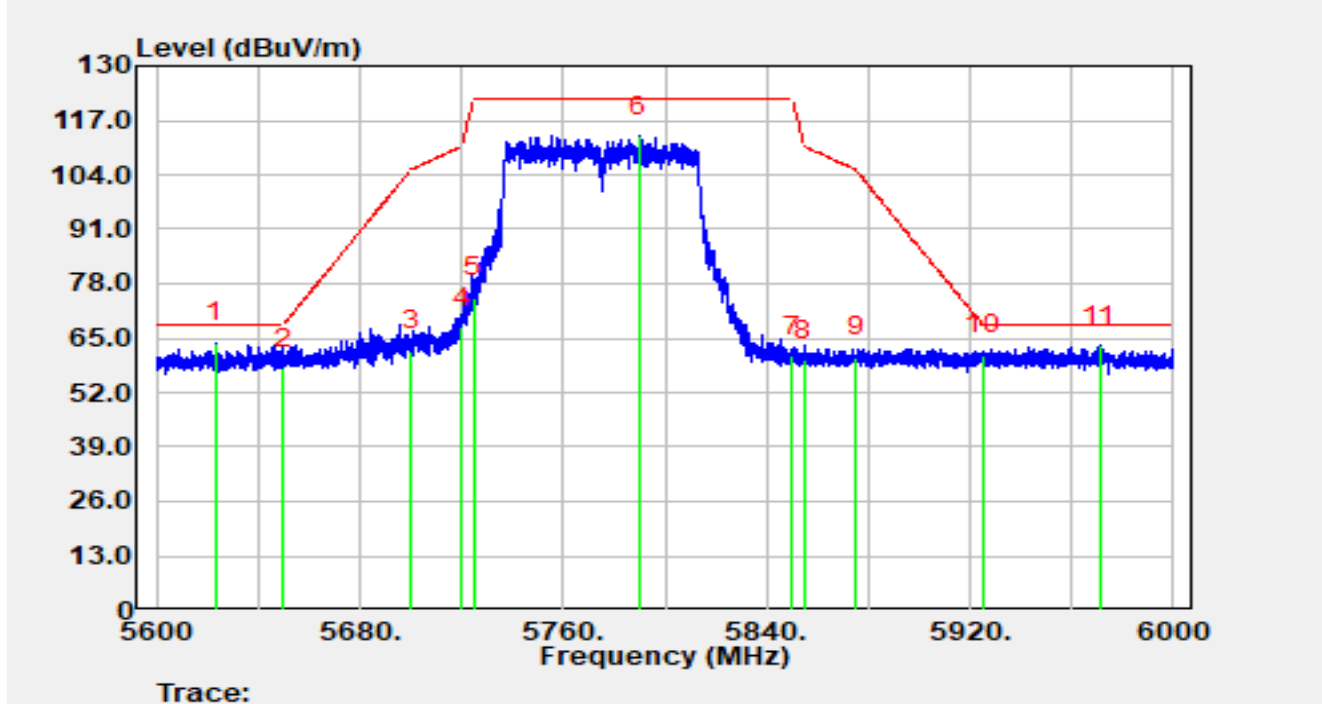


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5623.12	47.52	16.49	64.00	-4.20	68.20	Peak
2		5650.00	41.00	16.79	57.79	-10.41	68.20	Peak
3		5700.00	44.90	17.03	61.94	-43.26	105.20	Peak
4		5720.00	50.64	16.98	67.62	-43.18	110.80	Peak
5		5725.00	57.68	16.98	74.66	-47.54	122.20	Peak
6		5789.84	95.98	17.25	113.23	N/A	N/A	Peak
7		5850.00	43.08	17.56	60.64	-61.56	122.20	Peak
8		5855.00	42.27	17.52	59.79	-51.01	110.80	Peak
9		5875.00	42.92	17.61	60.53	-44.67	105.20	Peak
10		5925.00	43.42	17.49	60.91	-7.29	68.20	Peak
11		5971.04	45.44	17.71	63.15	-5.05	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

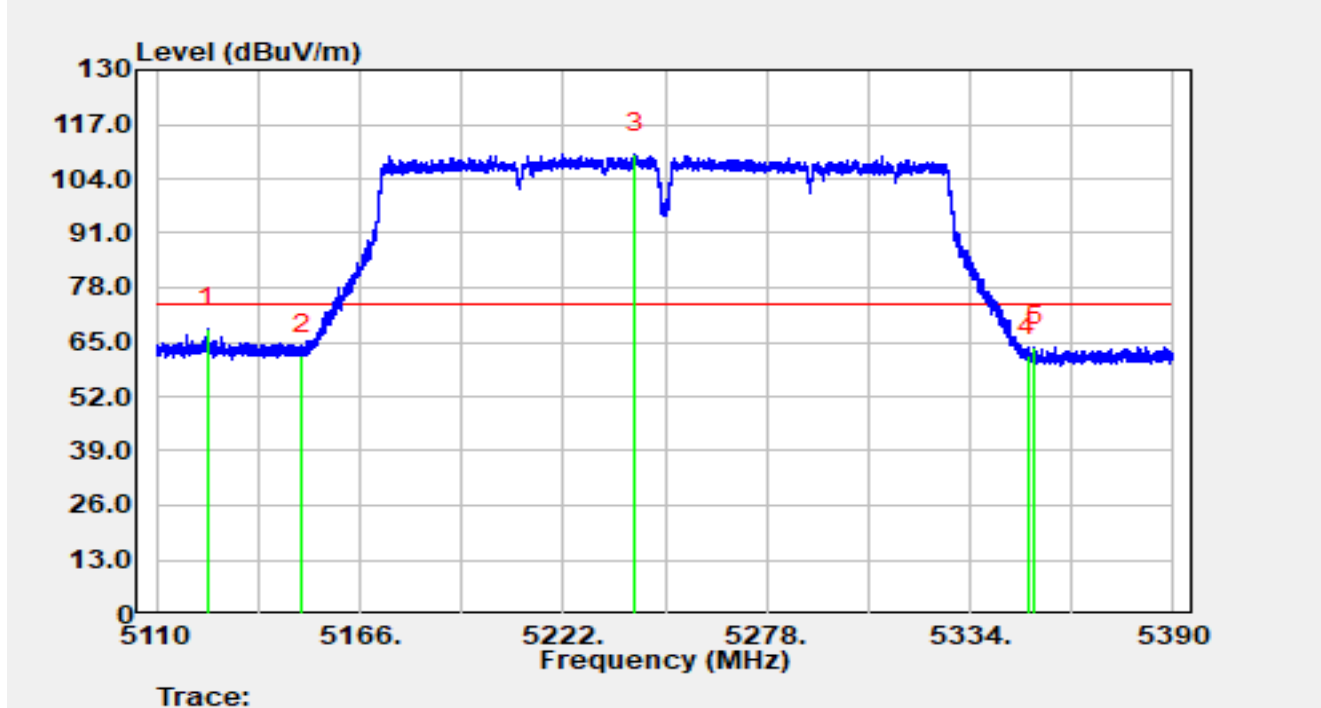


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5124.17	52.37	16.05	68.42	-5.58	74.00	Peak
2		5150.00	45.90	15.99	61.89	-12.11	74.00	Peak
3		5241.85	93.98	16.04	110.03	N/A	N/A	Peak
4		5350.00	46.04	15.72	61.76	-12.24	74.00	Peak
5		5351.86	48.27	15.74	64.01	-9.99	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

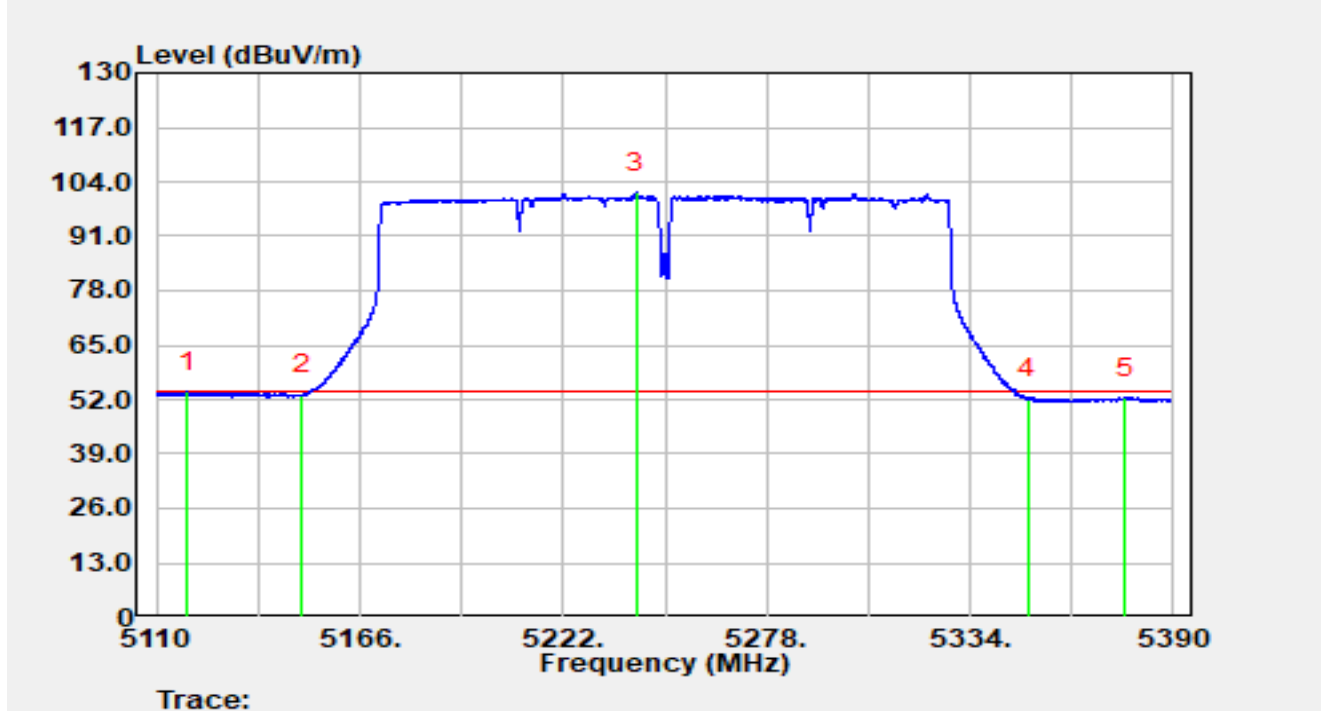


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5118.43	37.66	16.06	53.72	-0.28	54.00	Average
2		5150.00	37.00	15.99	52.99	-1.01	54.00	Average
3		5242.22	85.47	16.04	101.51	N/A	N/A	Average
4		5350.00	36.47	15.72	52.20	-1.80	54.00	Average
5		5376.53	36.42	15.95	52.37	-1.63	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

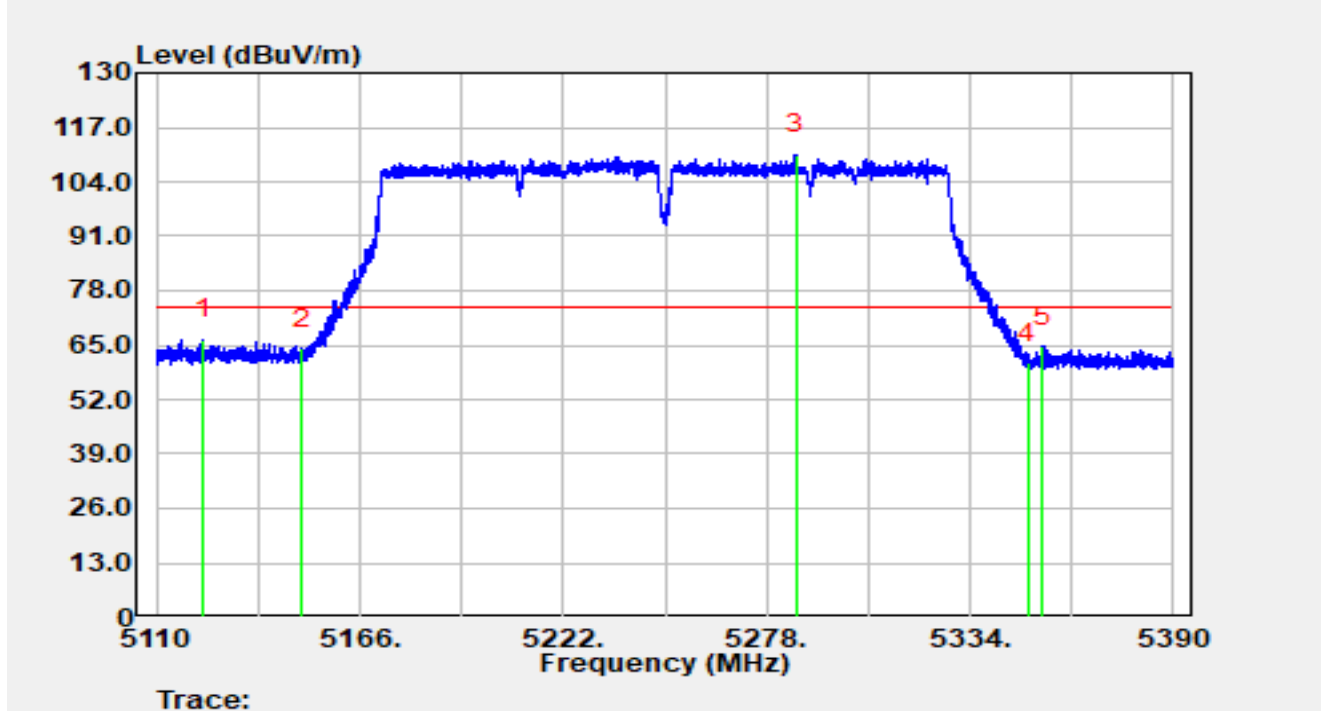


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5122.77	50.32	16.05	66.37	-7.63	74.00	Peak
2		5150.00	48.18	15.99	64.18	-9.82	74.00	Peak
3		5285.95	94.57	15.83	110.40	N/A	N/A	Peak
4		5350.00	44.92	15.72	60.65	-13.35	74.00	Peak
5		5354.13	48.89	15.76	64.65	-9.35	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

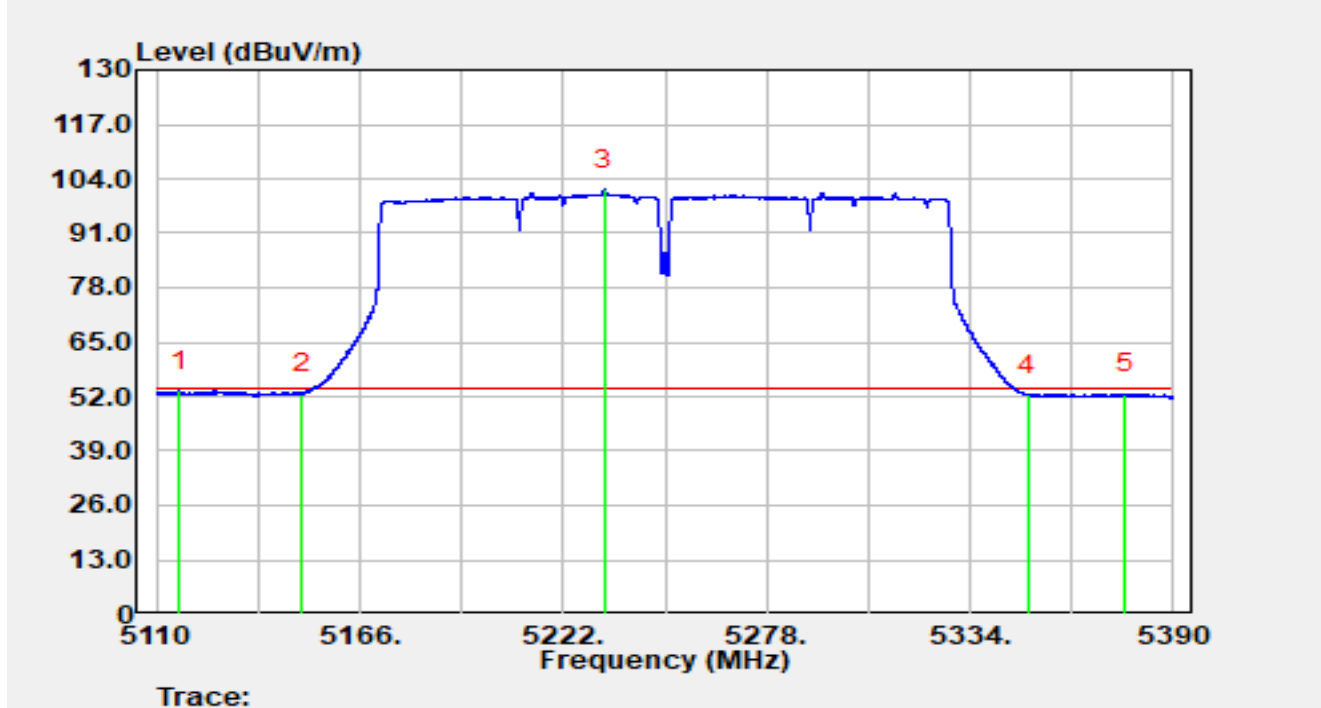


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5116.16	37.29	16.07	53.36	-0.64	54.00	Average
2		5150.00	36.73	15.99	52.72	-1.28	54.00	Average
3		5233.40	85.12	16.22	101.35	N/A	N/A	Average
4		5350.00	36.63	15.72	52.36	-1.64	54.00	Average
5		5376.73	36.57	15.95	52.52	-1.48	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

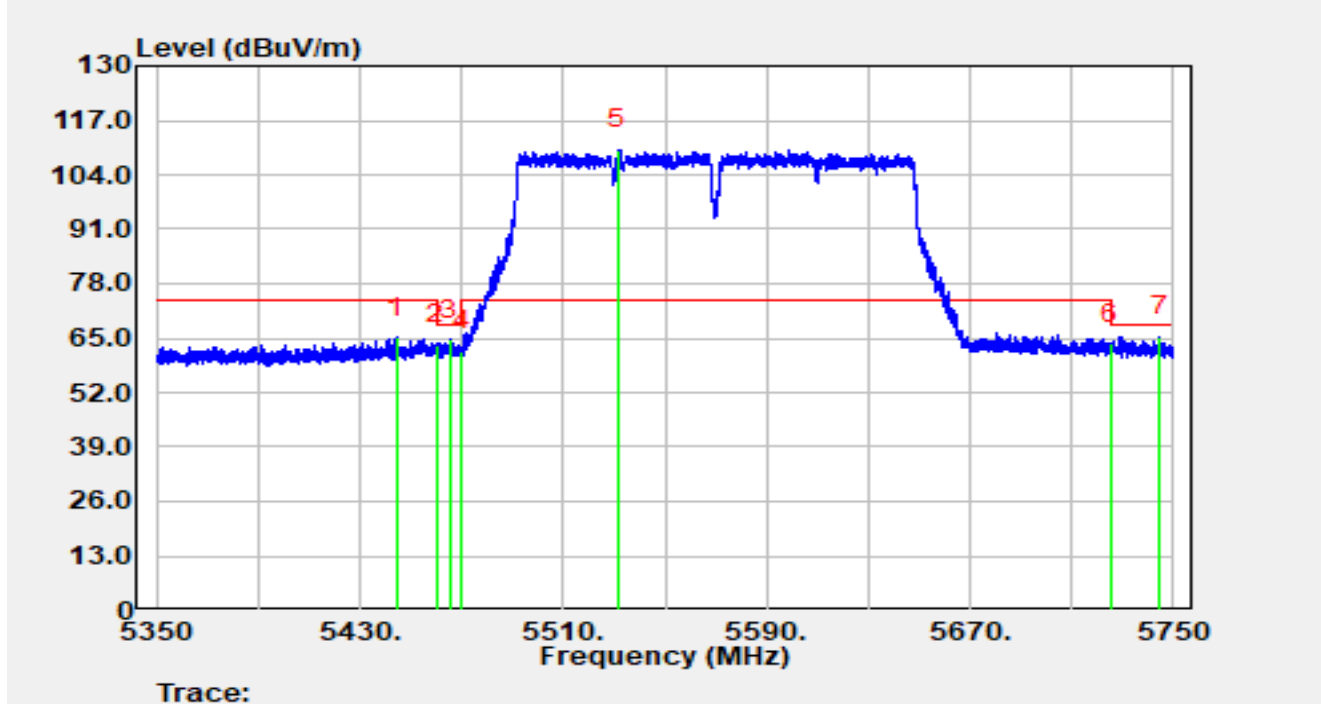


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5444.48	49.34	15.88	65.23	-8.77	74.00	Peak
2		5460.00	47.41	16.00	63.41	-4.79	68.20	Peak
3		5465.48	48.73	15.97	64.69	-3.51	68.20	Peak
4		5470.00	45.95	15.97	61.92	-6.28	68.20	Peak
5		5531.32	93.56	16.46	110.02	N/A	N/A	Peak
6		5725.00	46.67	16.98	63.65	-4.55	68.20	Peak
7	*	5744.76	48.48	16.98	65.46	-2.74	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

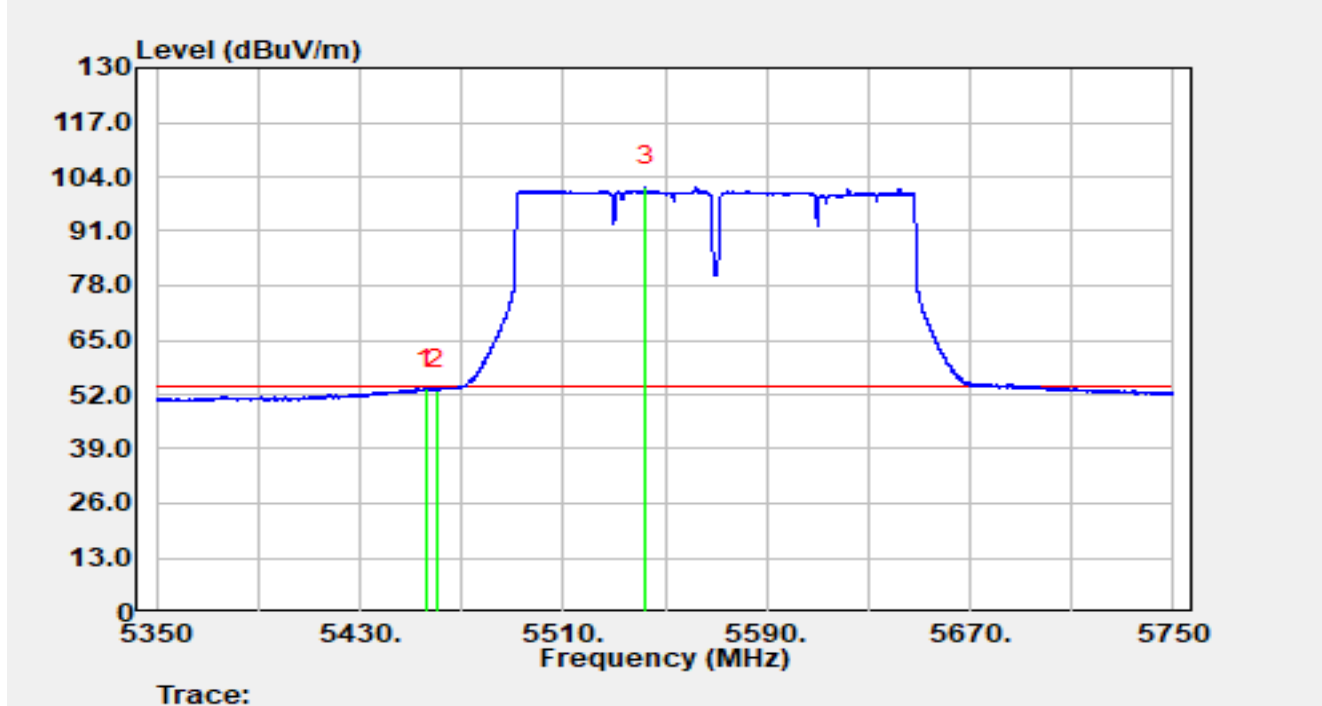


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5456.12	37.44	16.02	53.46	-0.54	54.00	Average
2		5460.00	37.19	16.00	53.19	-0.81	54.00	Average
3		5542.16	85.24	16.54	101.77	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

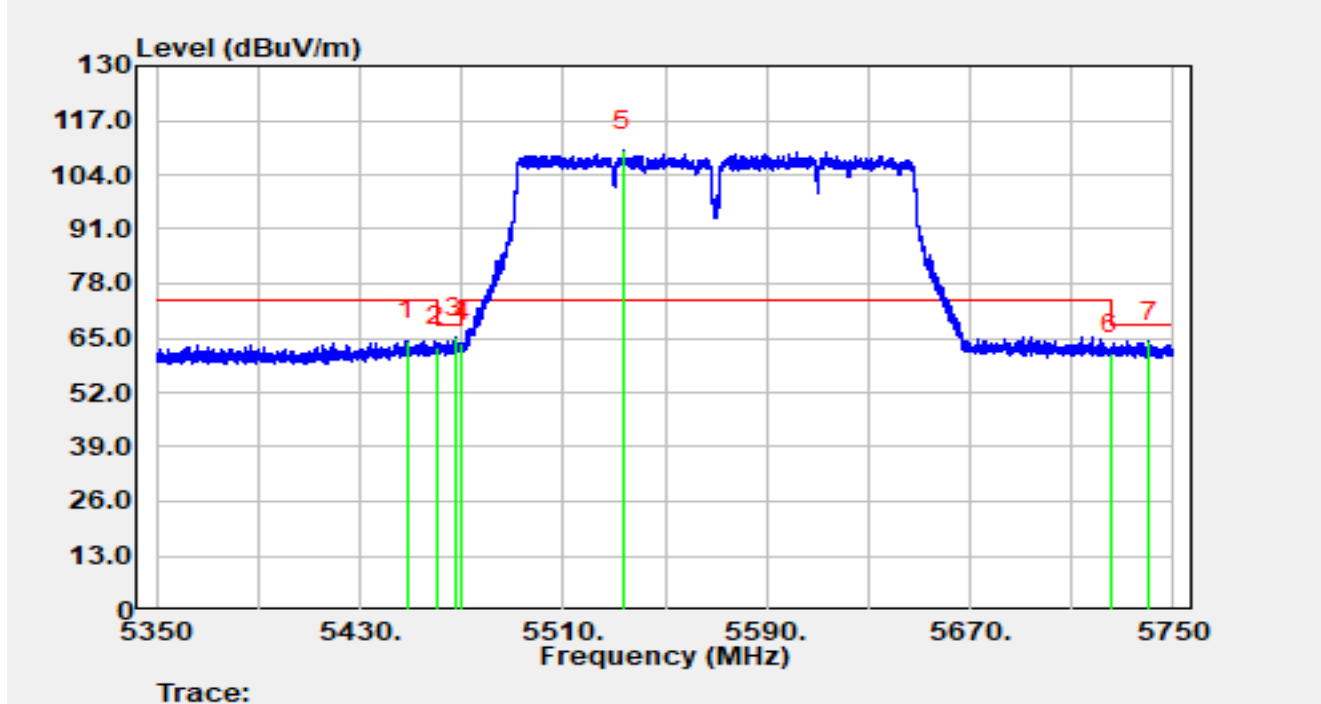


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5448.36	48.46	15.97	64.43	-9.57	74.00	Peak
2		5460.00	46.84	16.00	62.84	-5.36	68.20	Peak
3	*	5467.36	49.18	15.95	65.13	-3.07	68.20	Peak
4		5470.00	48.03	15.97	64.00	-4.20	68.20	Peak
5		5533.72	93.28	16.50	109.78	N/A	N/A	Peak
6		5725.00	44.33	16.98	61.31	-6.89	68.20	Peak
7		5740.48	47.23	16.96	64.18	-4.02	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

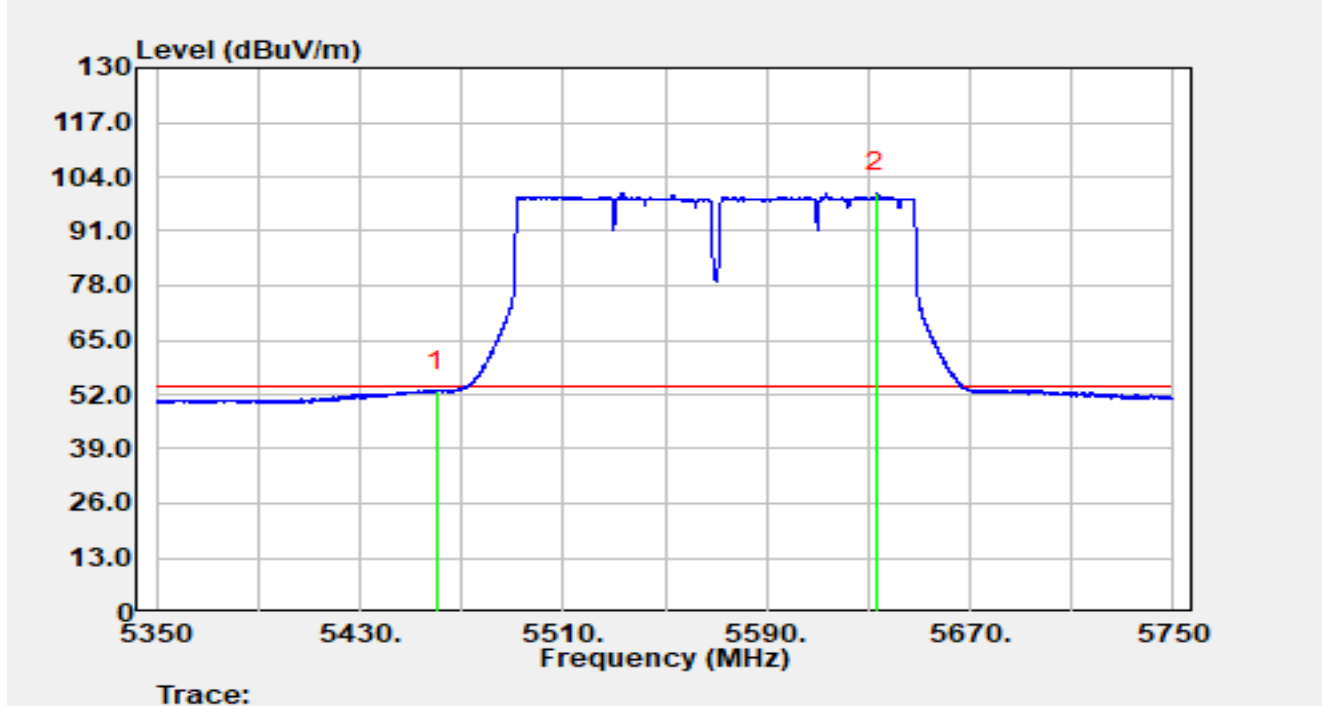


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.00	36.94	16.00	52.94	-1.06	54.00	Average
2		5633.28	83.57	16.66	100.23	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5180 MHz		

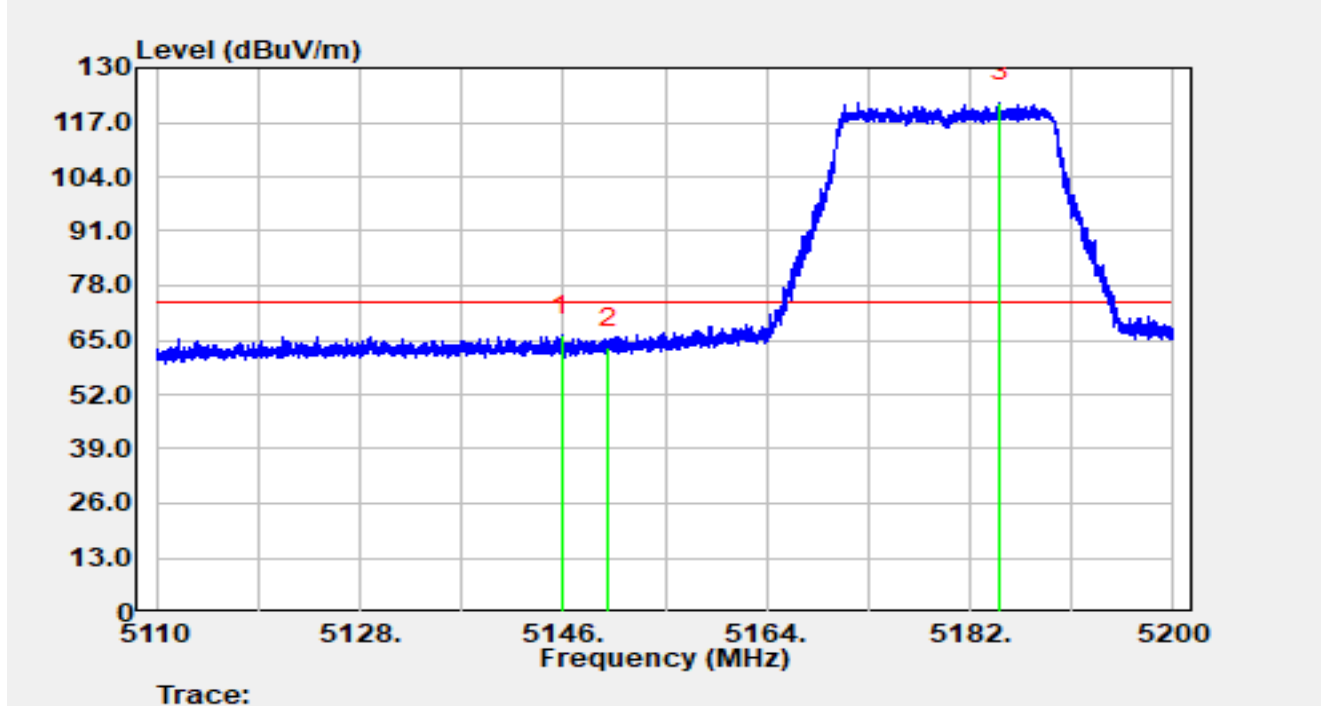


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.85	50.12	15.98	66.09	-7.91	74.00	Peak
2		5150.00	47.20	15.99	63.19	-10.81	74.00	Peak
3		5184.62	105.80	16.00	121.80	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5180 MHz		

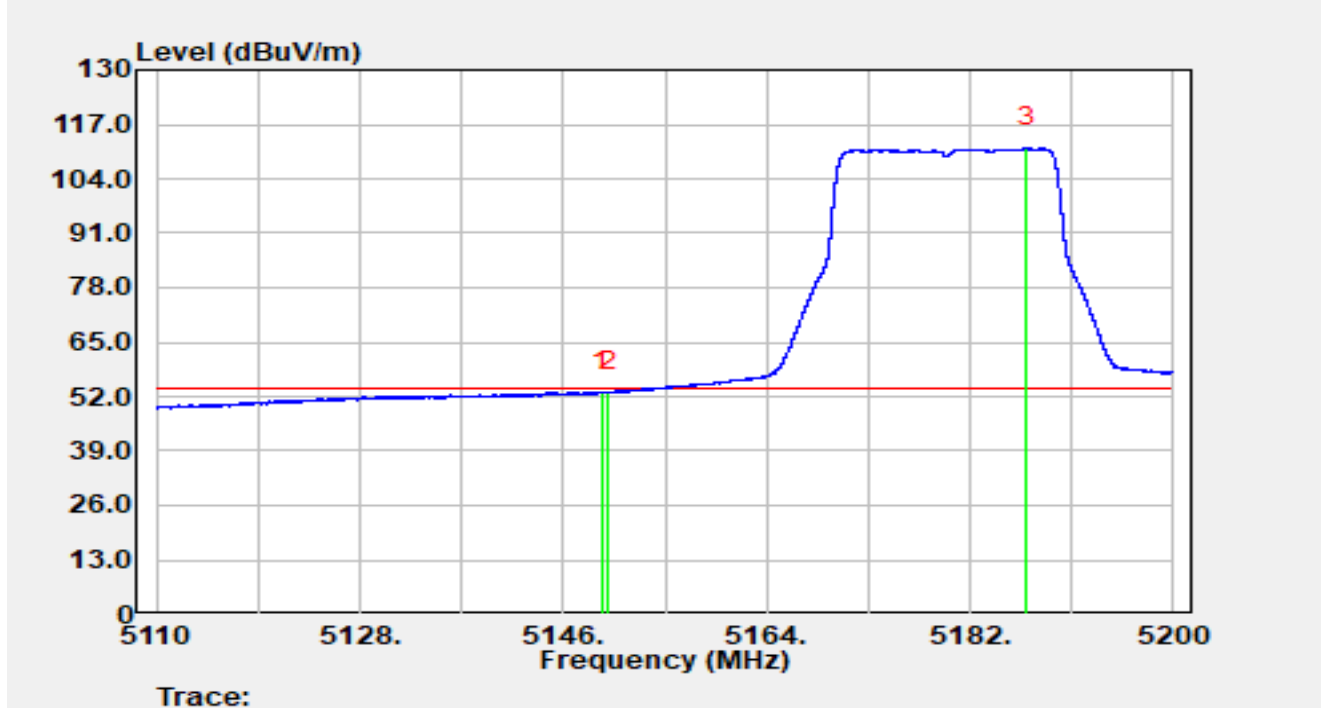


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.38	37.22	15.99	53.21	-0.79	54.00	Average
2		5150.00	37.01	15.99	53.01	-0.99	54.00	Average
3		5186.96	95.36	16.00	111.36	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5180 MHz		

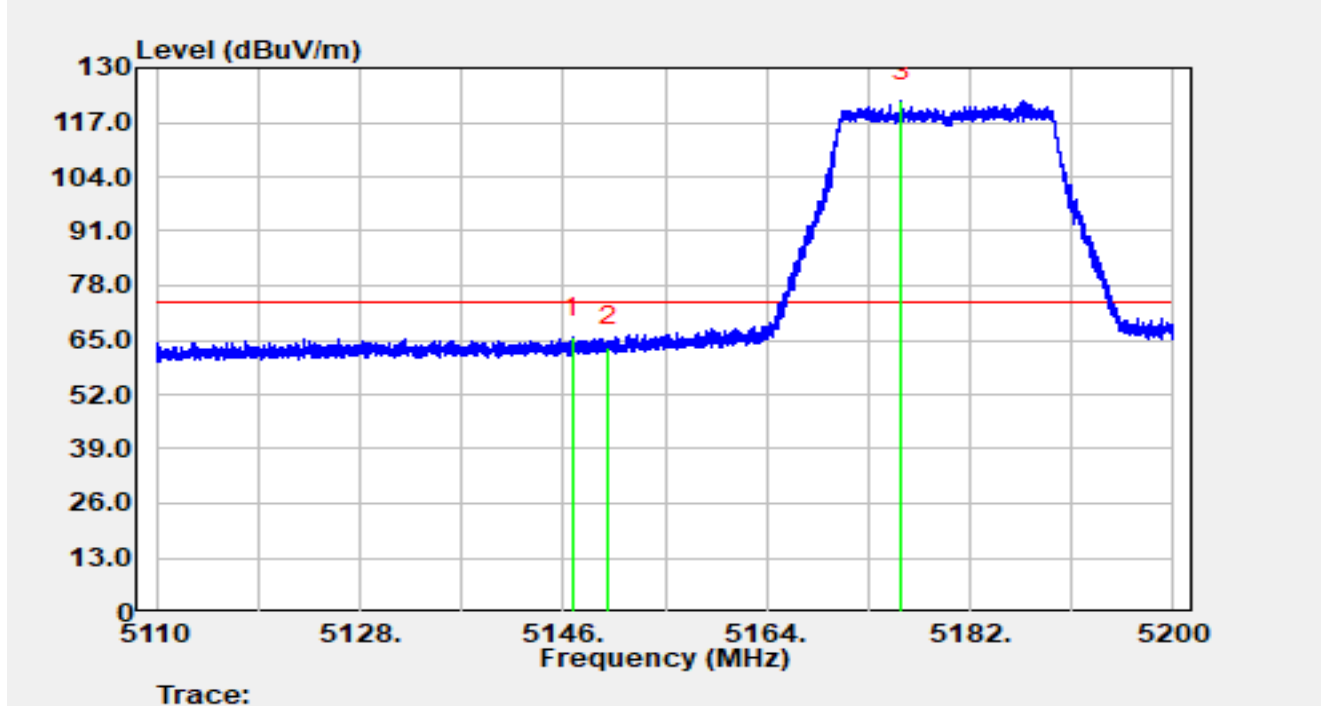


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.83	49.66	15.98	65.64	-8.36	74.00	Peak
2		5150.00	47.36	15.99	63.35	-10.65	74.00	Peak
3		5175.95	106.07	16.01	122.08	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5180 MHz		

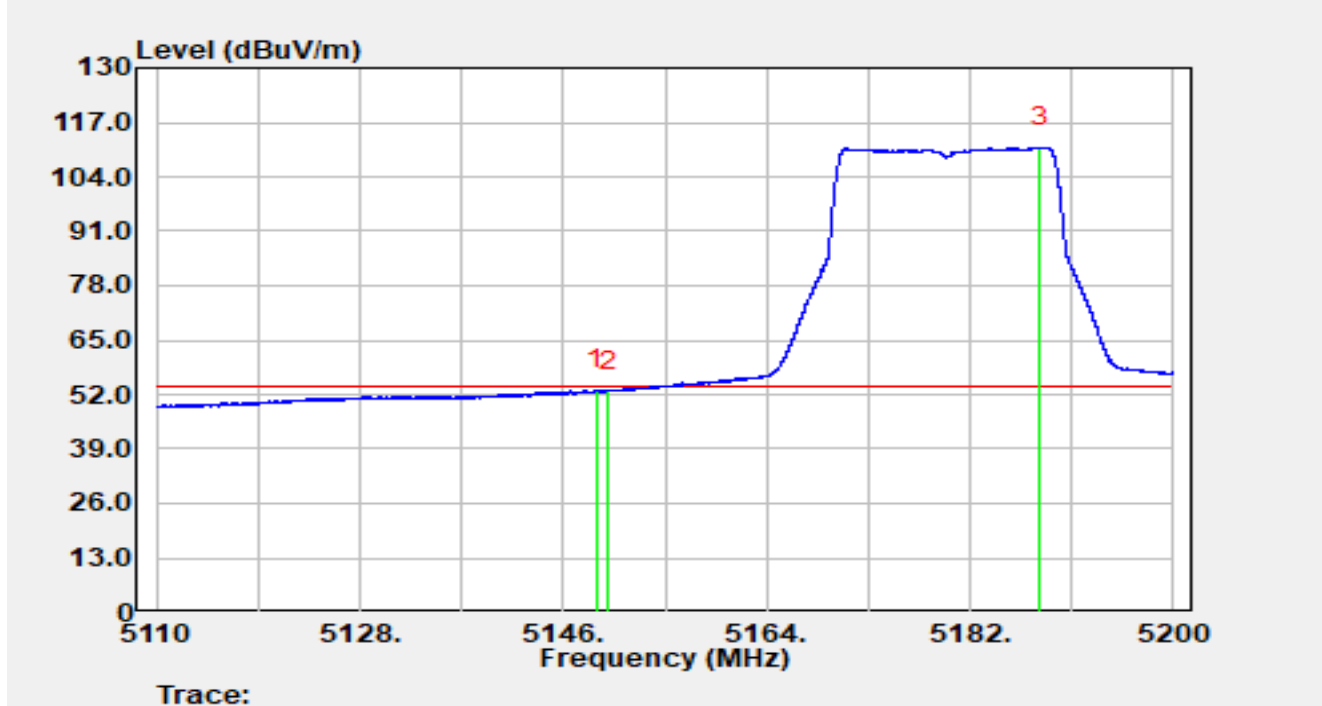


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.93	37.14	15.99	53.13	-0.87	54.00	Average
2		5150.00	36.94	15.99	52.93	-1.07	54.00	Average
3		5188.17	94.96	16.00	110.96	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5320 MHz		

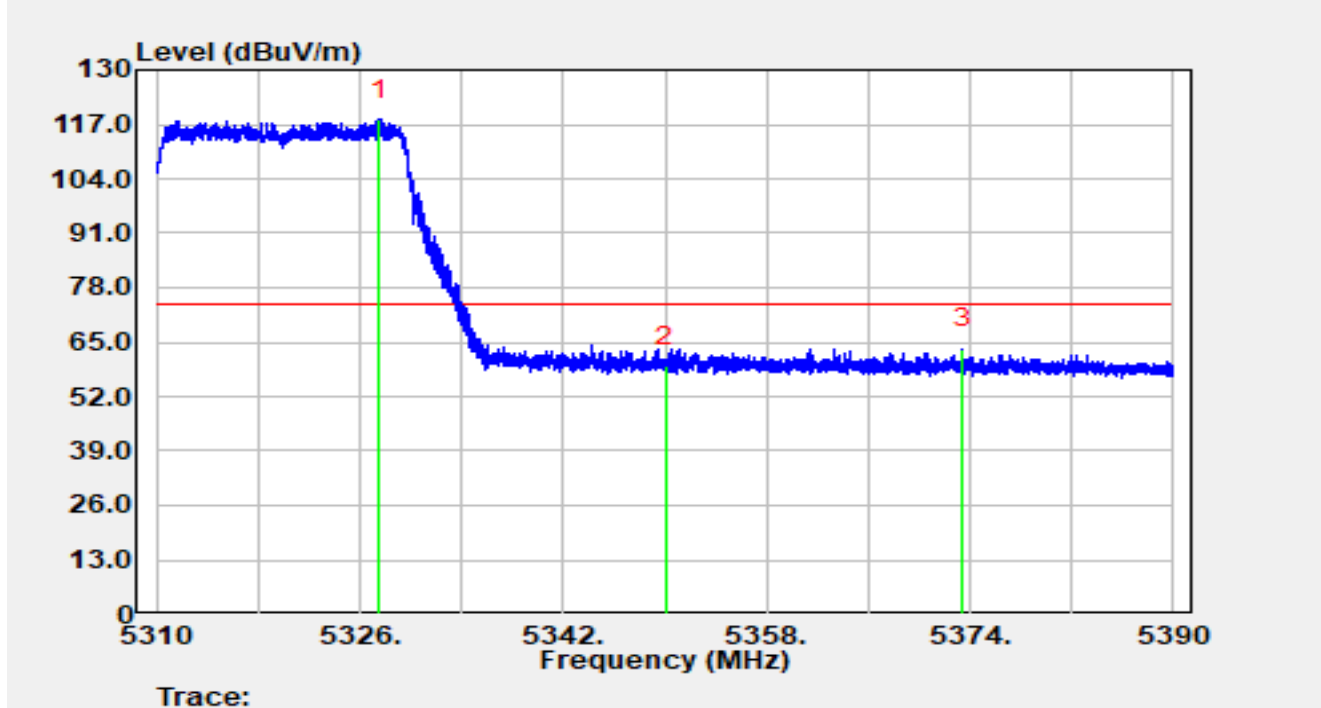


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5327.57	102.37	15.85	118.22	N/A	N/A	Peak
2		5350.00	43.63	15.72	59.35	-14.65	74.00	Peak
3	*	5373.42	47.47	15.92	63.40	-10.60	74.00	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5320 MHz		

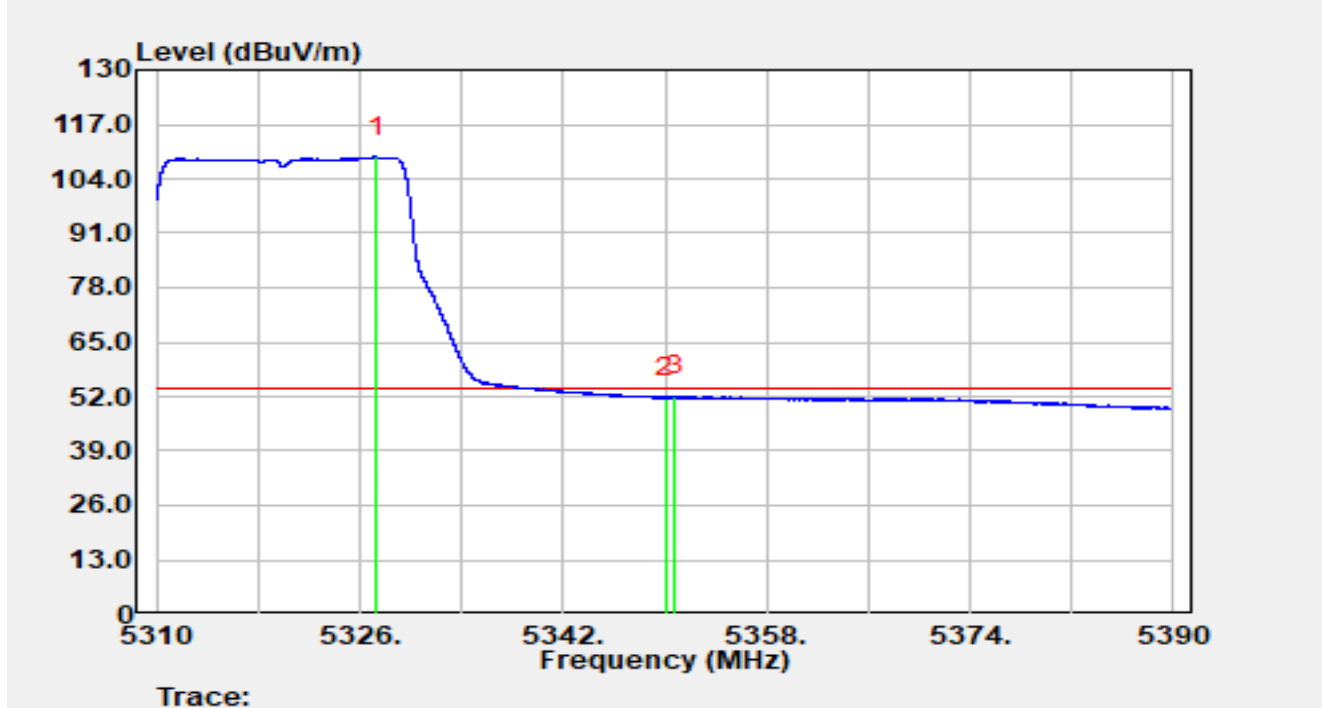


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5327.28	93.31	15.85	109.16	N/A	N/A	Average
2		5350.00	36.01	15.72	51.73	-2.27	54.00	Average
3	*	5350.81	36.27	15.73	52.00	-2.00	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5320 MHz		

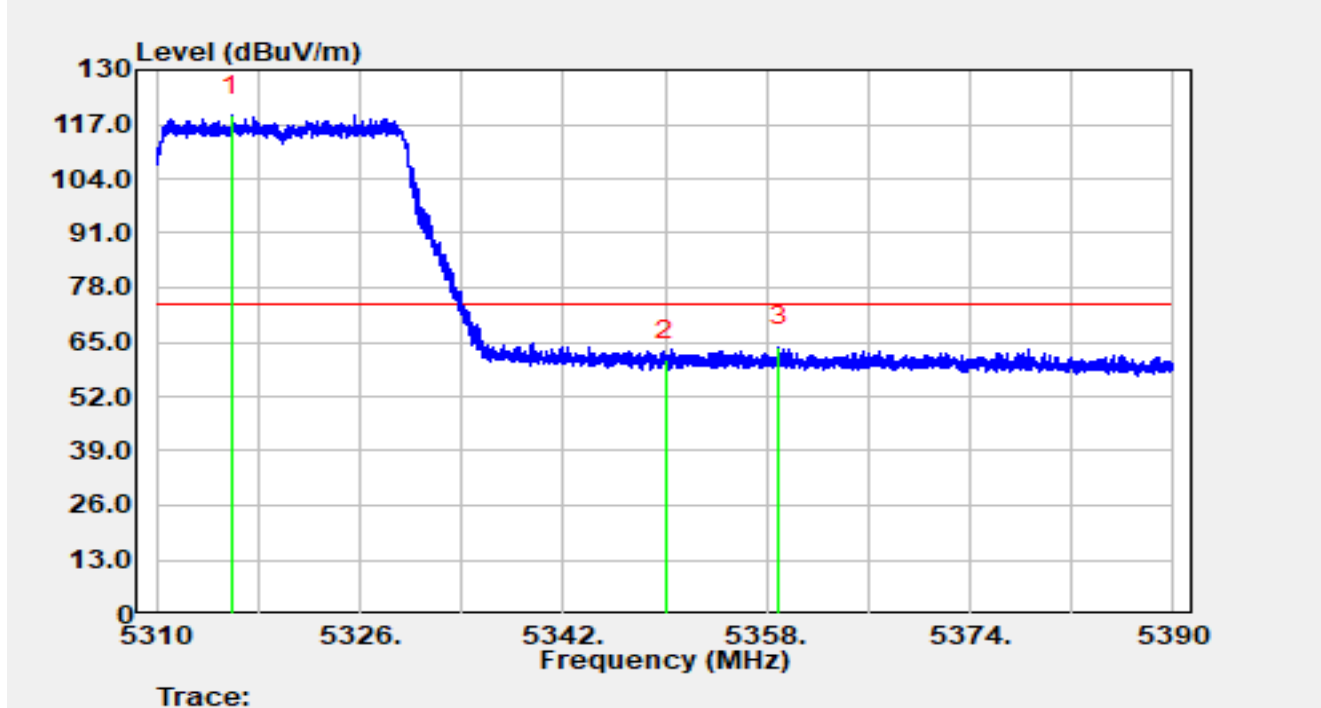


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5315.86	103.29	15.81	119.10	N/A	N/A	Peak
2		5350.00	44.89	15.72	60.62	-13.38	74.00	Peak
3	*	5358.93	48.07	15.80	63.87	-10.13	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5320 MHz		

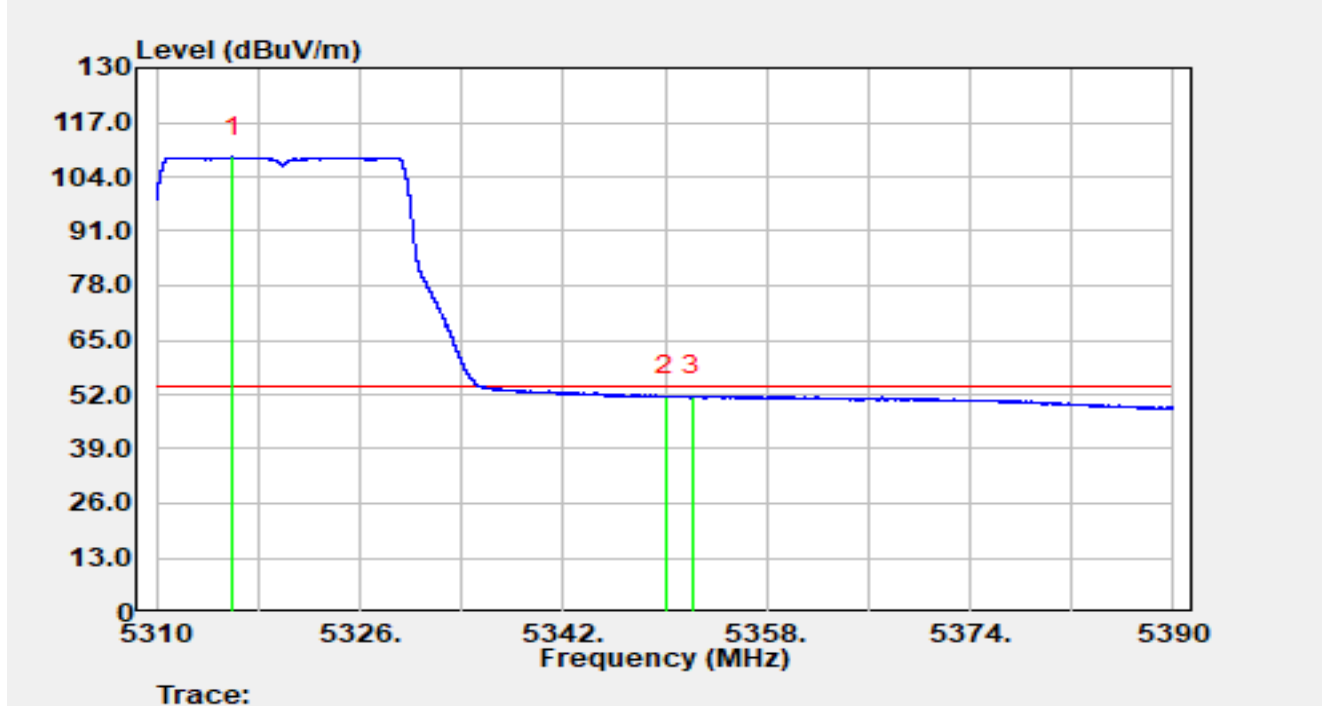


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5315.99	92.86	15.81	108.67	N/A	N/A	Average
2		5350.00	35.93	15.72	51.66	-2.34	54.00	Average
3	*	5352.17	35.96	15.74	51.70	-2.30	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5500 MHz		

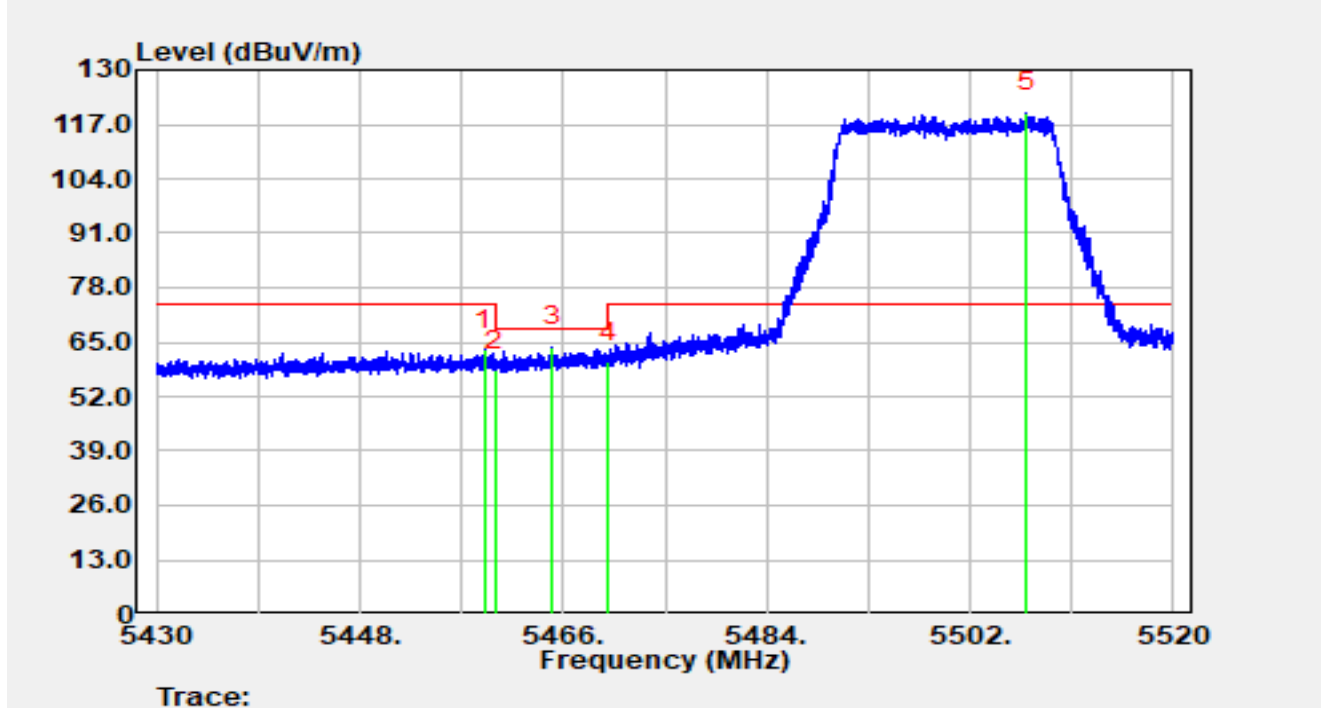


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.08	47.22	16.01	63.23	-10.77	74.00	Peak
2		5460.00	42.27	16.00	58.27	-9.93	68.20	Peak
3	*	5464.99	47.81	15.97	63.78	-4.42	68.20	Peak
4		5470.00	44.28	15.97	60.24	-7.96	68.20	Peak
5		5506.96	103.41	16.30	119.71	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5500 MHz		

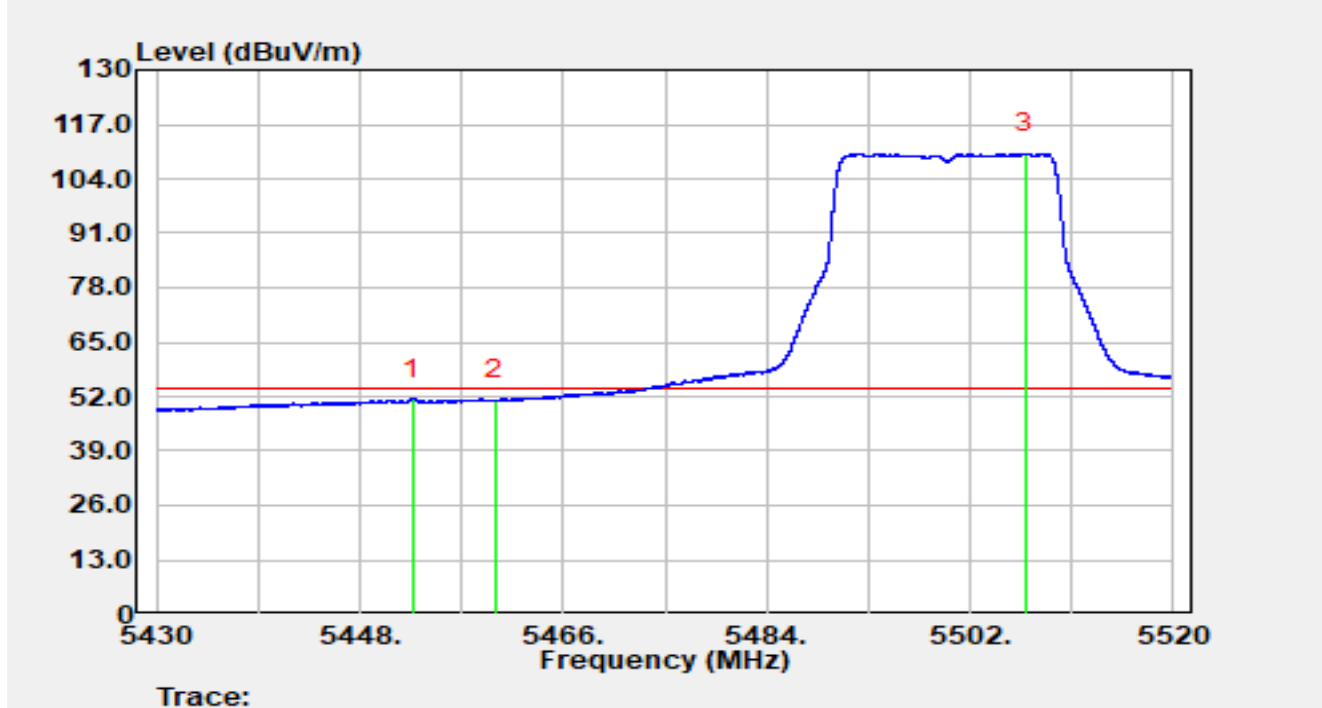


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5452.65	35.41	16.03	51.43	-2.57	54.00	Average
2		5460.00	35.03	16.00	51.03	-2.97	54.00	Average
3		5506.93	93.79	16.30	110.09	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5500 MHz		

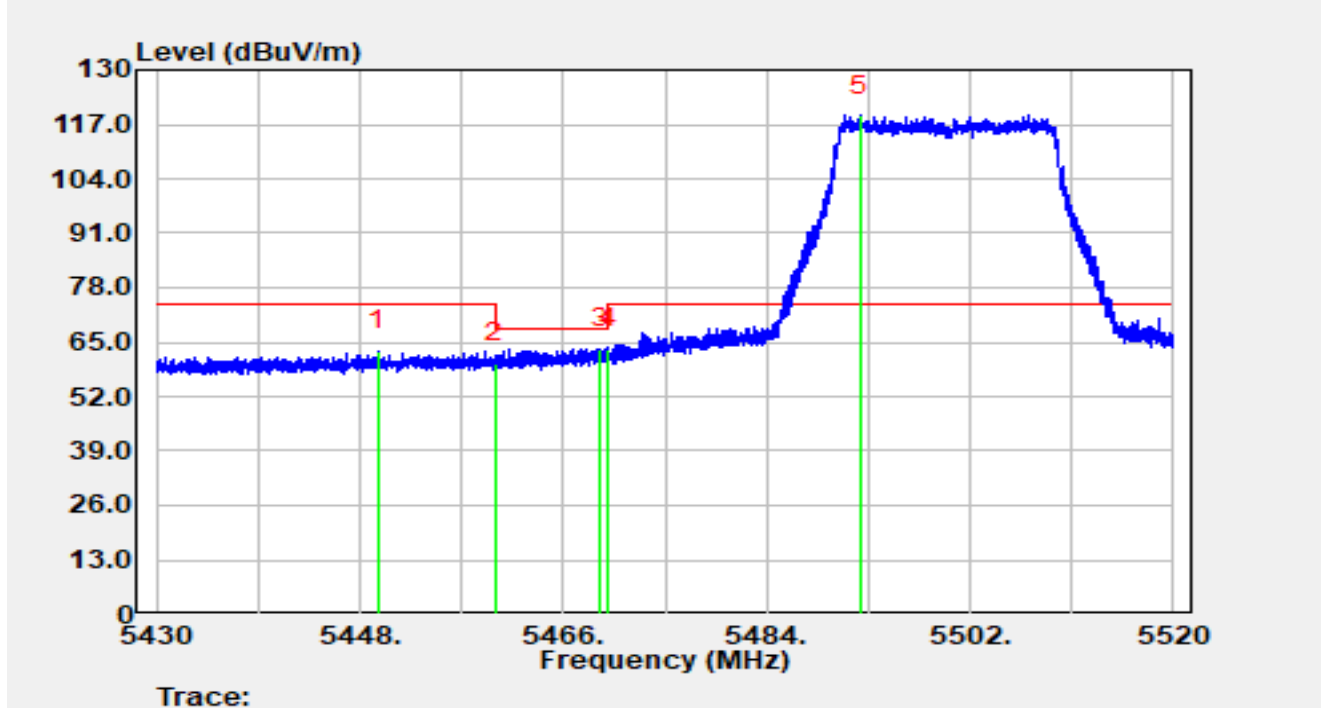


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5449.61	46.88	16.00	62.87	-11.13	74.00	Peak
2		5460.00	44.05	16.00	60.05	-8.15	68.20	Peak
3	*	5469.29	47.49	15.96	63.45	-4.75	68.20	Peak
4		5470.00	47.47	15.97	63.44	-4.76	68.20	Peak
5		5492.23	102.85	16.23	119.07	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5500 MHz		

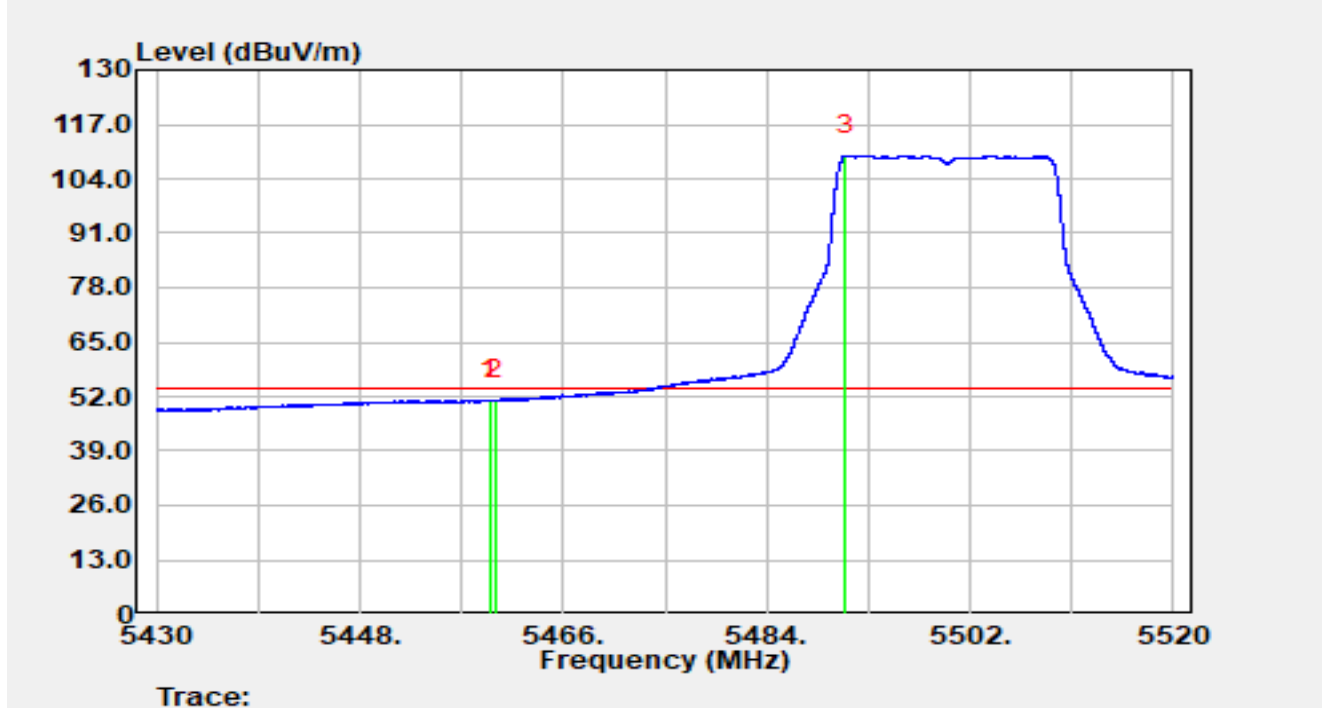


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.48	35.26	16.00	51.26	-2.74	54.00	Average
2		5460.00	35.14	16.00	51.14	-2.86	54.00	Average
3		5491.00	93.33	16.22	109.55	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5700 MHz		

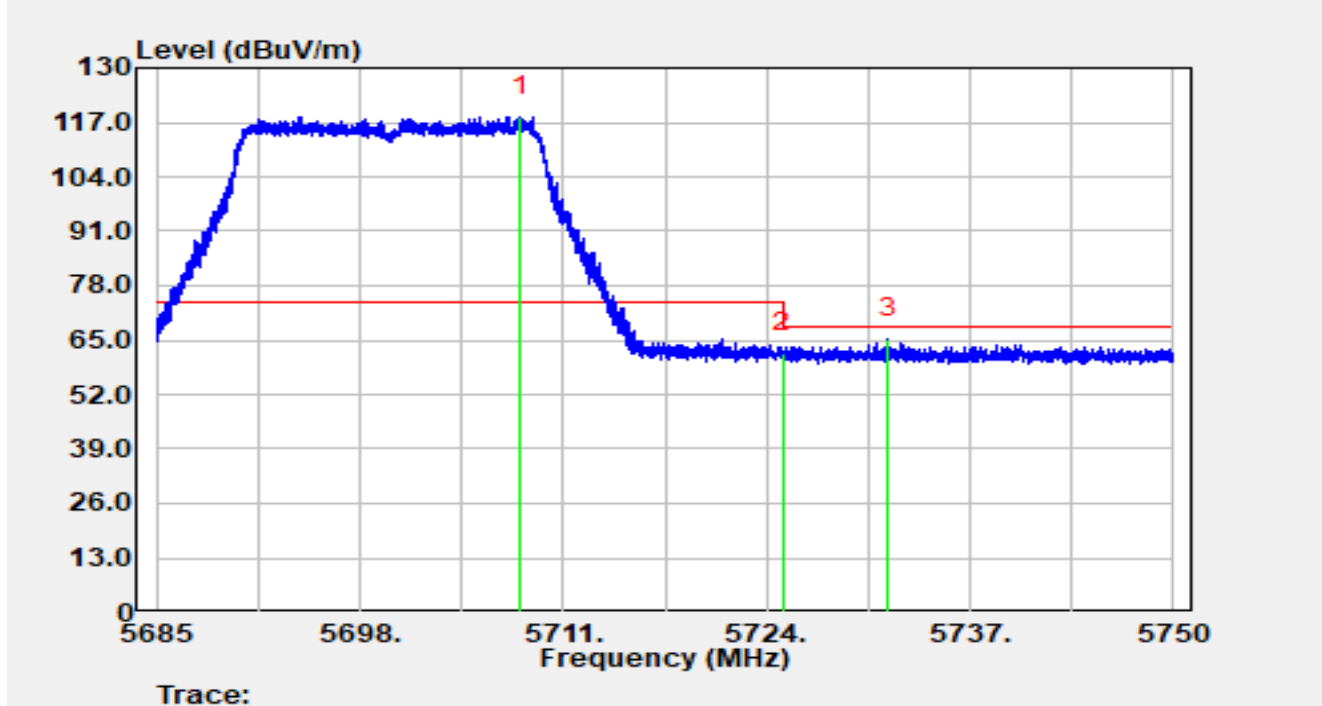


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5708.23	101.45	17.01	118.46	N/A	N/A	Peak
2		5725.00	44.90	16.98	61.88	-6.32	68.20	Peak
3	*	5731.75	48.42	16.97	65.39	-2.81	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5700 MHz		

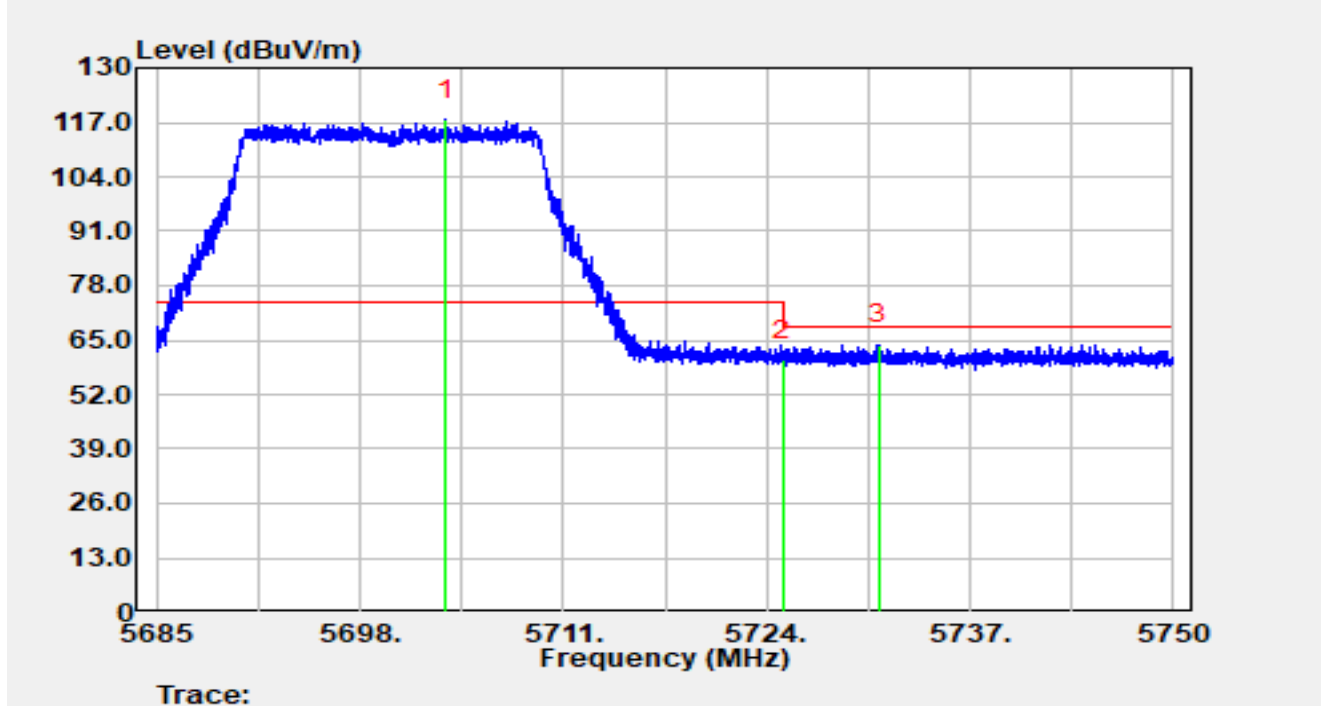


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5703.47	100.50	17.02	117.52	N/A	N/A	Peak
2		5725.00	43.14	16.98	60.12	-8.08	68.20	Peak
3	*	5731.12	47.05	16.97	64.02	-4.18	68.20	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5745 MHz		

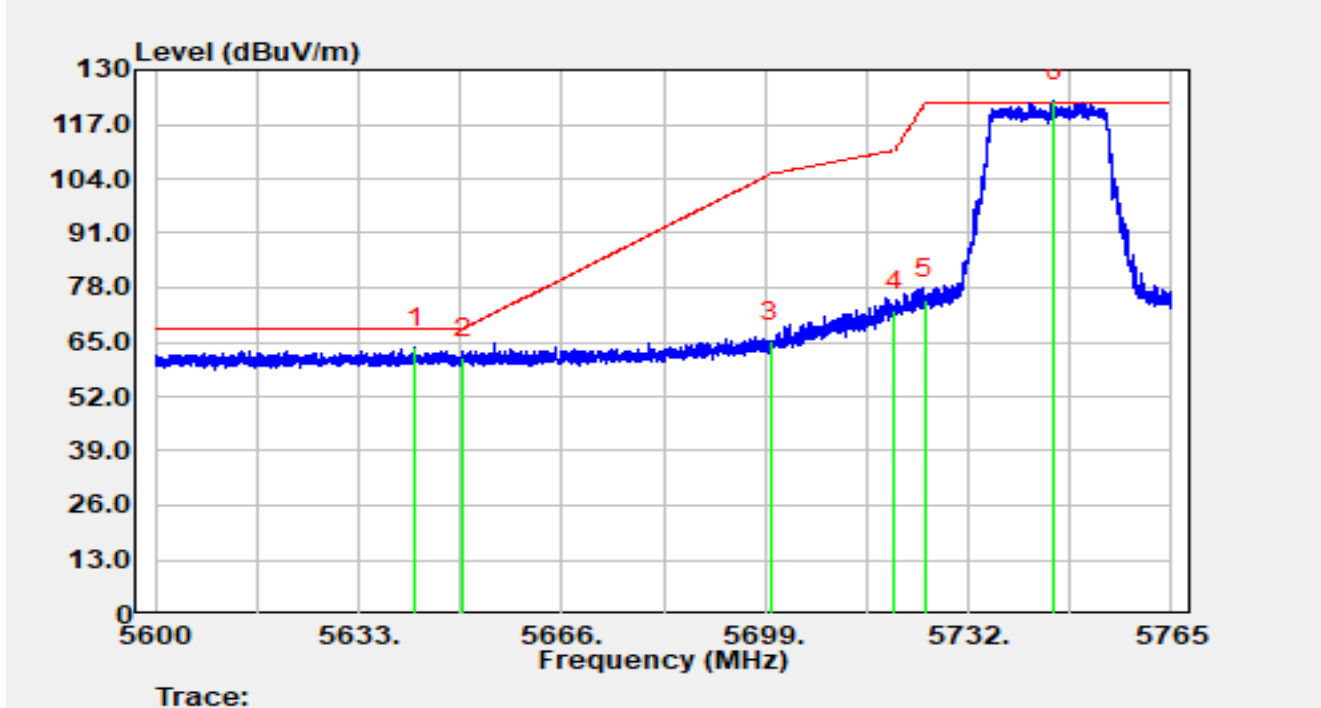


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5642.21	46.96	16.76	63.73	-4.47	68.20	Peak
2		5650.00	44.31	16.79	61.10	-7.10	68.20	Peak
3		5700.00	48.14	17.03	65.18	-40.02	105.20	Peak
4		5720.00	55.41	16.98	72.40	-38.40	110.80	Peak
5		5725.00	58.28	16.98	75.26	-46.94	122.20	Peak
6		5745.89	105.50	16.99	122.49	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m)

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5745 MHz		

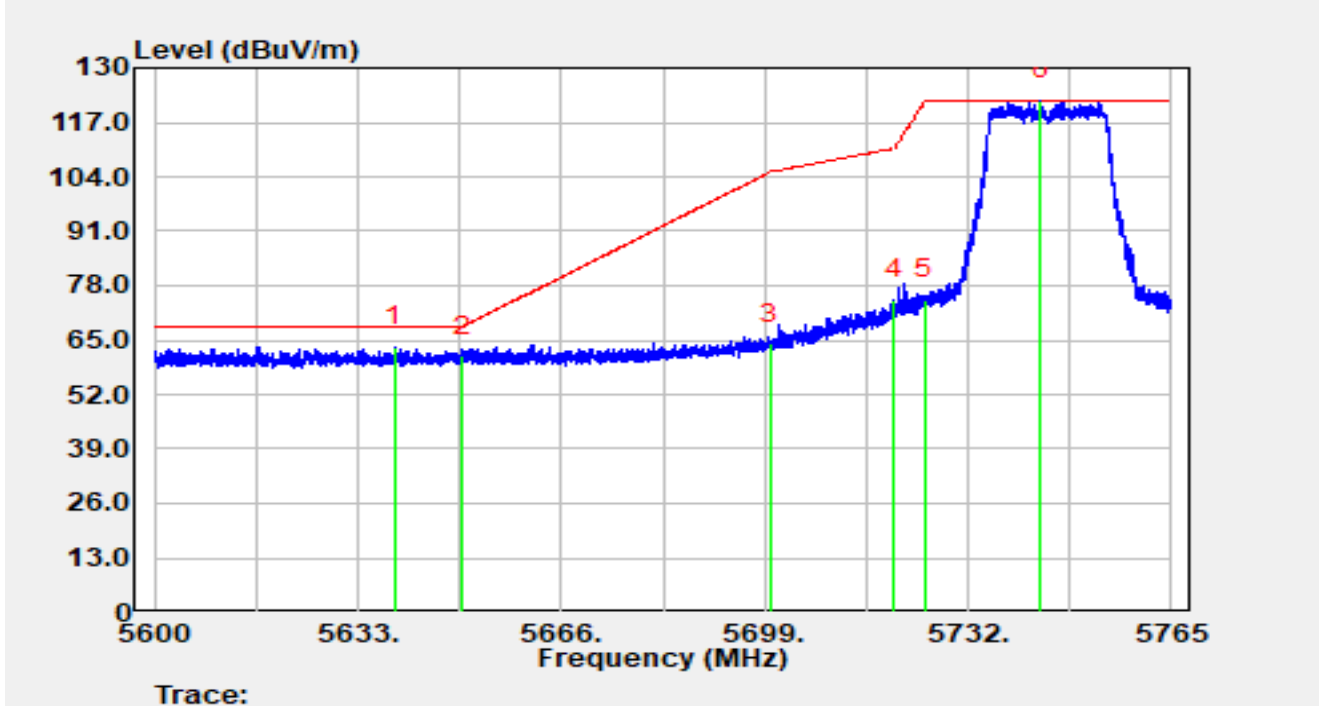


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5639.01	46.68	16.75	63.43	-4.77	68.20	Peak
2		5650.00	44.50	16.79	61.30	-6.90	68.20	Peak
3		5700.00	47.02	17.03	64.06	-41.14	105.20	Peak
4		5720.00	57.62	16.98	74.60	-36.20	110.80	Peak
5		5725.00	57.75	16.98	74.73	-47.47	122.20	Peak
6		5743.70	105.35	16.97	122.32	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5825 MHz		

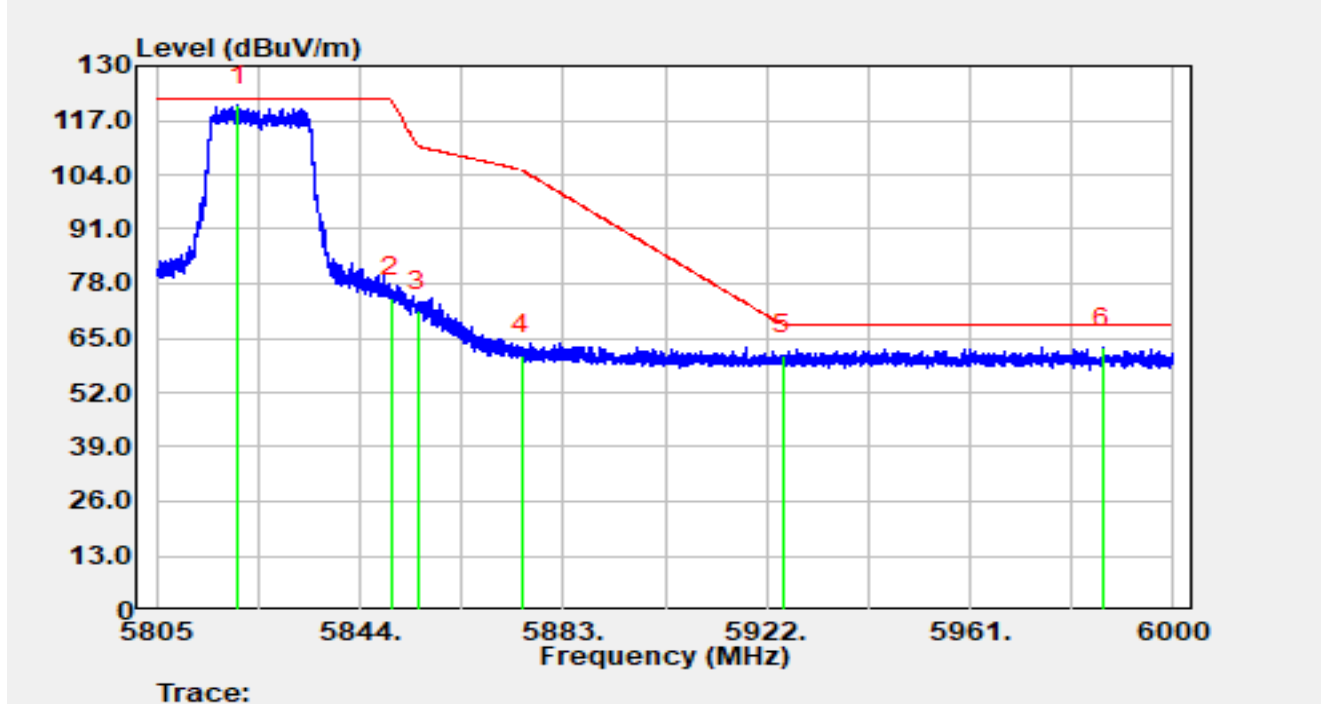


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5820.64	103.03	17.42	120.45	N/A	N/A	Peak
2		5850.00	57.00	17.56	74.57	-47.63	122.20	Peak
3		5855.00	53.99	17.52	71.52	-39.28	110.80	Peak
4		5875.00	43.31	17.61	60.91	-44.29	105.20	Peak
5		5925.00	43.57	17.49	61.06	-7.14	68.20	Peak
6	*	5986.37	45.17	17.62	62.79	-5.41	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE20 at 5825 MHz		

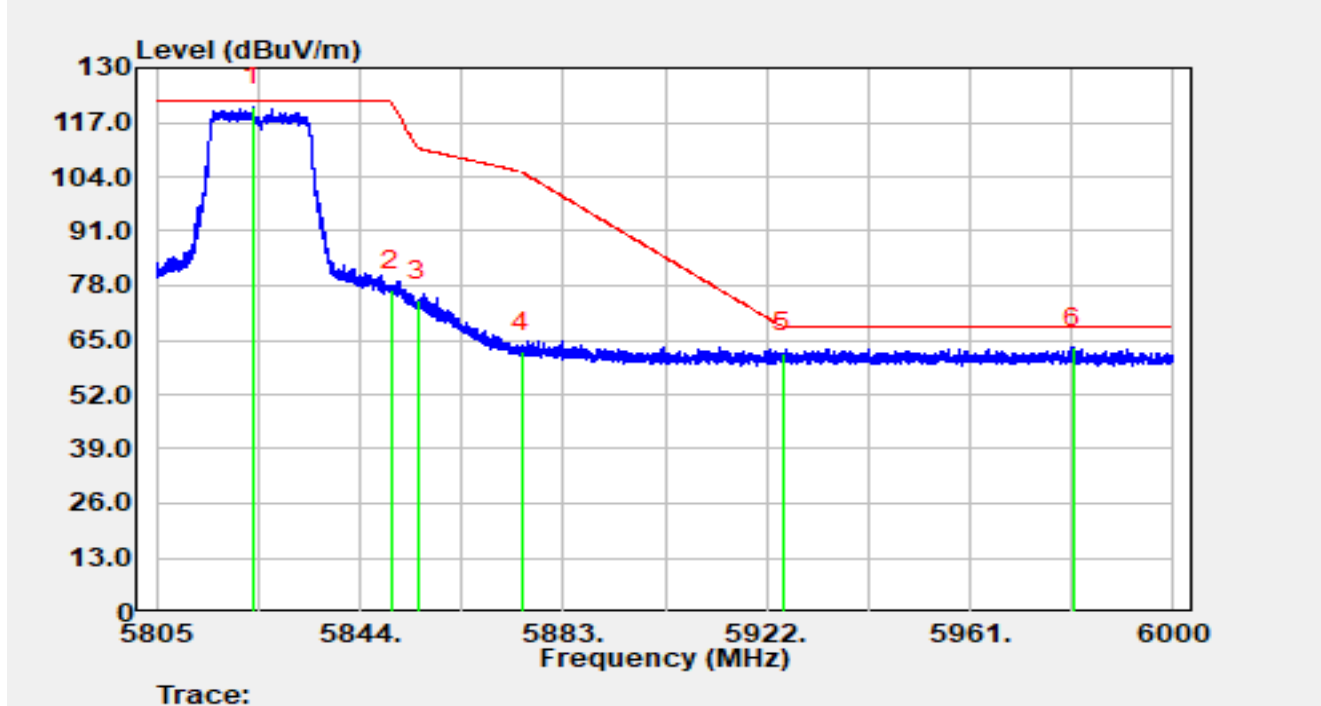


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5823.45	103.27	17.43	120.70	N/A	N/A	Peak
2		5850.00	59.35	17.56	76.91	-45.29	122.20	Peak
3		5855.00	56.81	17.52	74.33	-36.47	110.80	Peak
4		5875.00	44.65	17.61	62.26	-42.94	105.20	Peak
5		5925.00	44.33	17.49	61.82	-6.38	68.20	Peak
6	*	5980.77	45.52	17.74	63.26	-4.94	68.20	Peak

Notes:

- " * " indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5190 MHz		

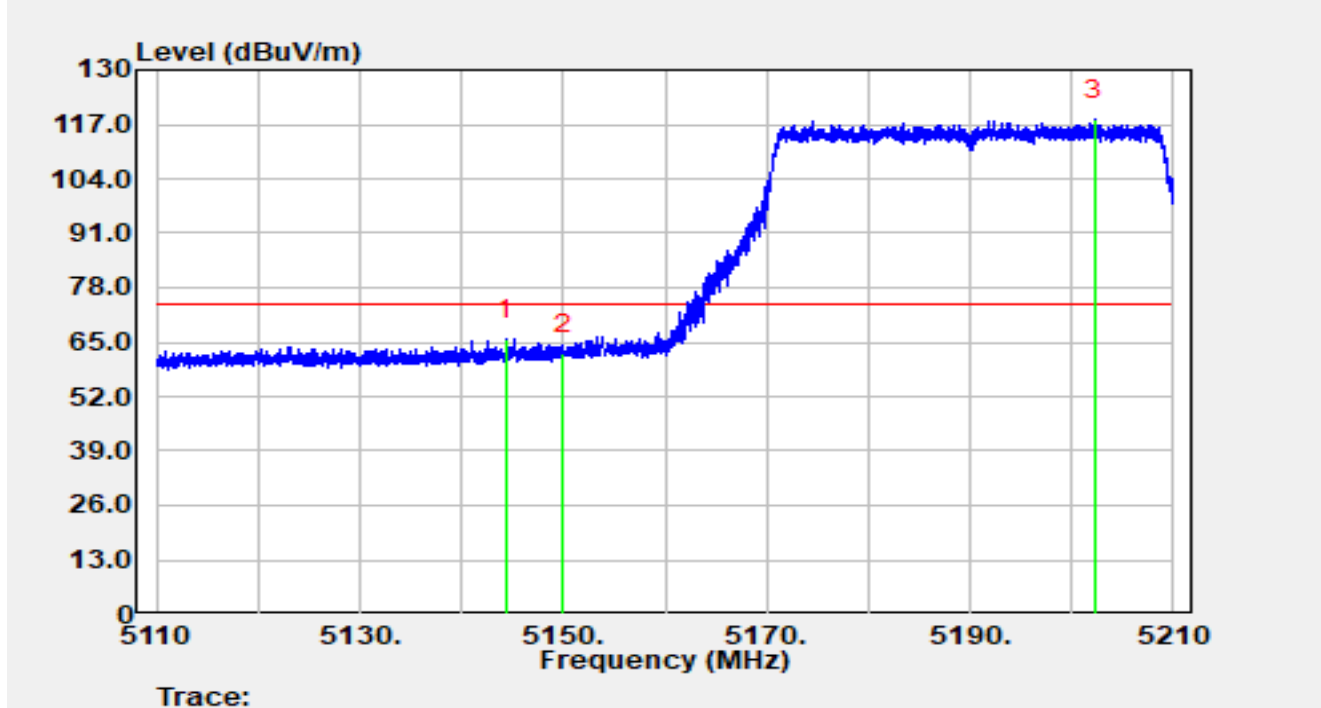


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5144.34	49.66	15.97	65.63	-8.37	74.00	Peak
2		5150.00	46.25	15.99	62.24	-11.76	74.00	Peak
3		5202.27	102.15	15.97	118.13	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5190 MHz		

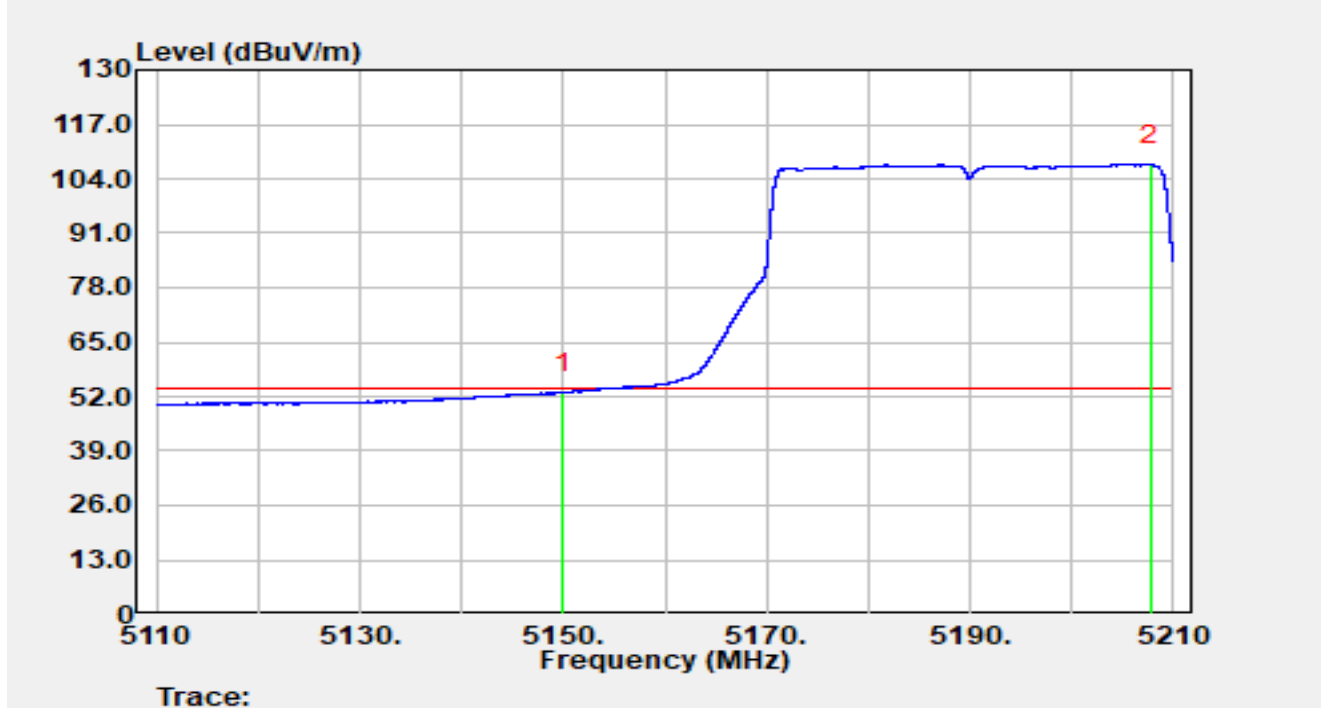


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.00	36.94	15.99	52.94	-1.06	54.00	Average
2		5207.73	91.35	15.96	107.31	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5190 MHz		

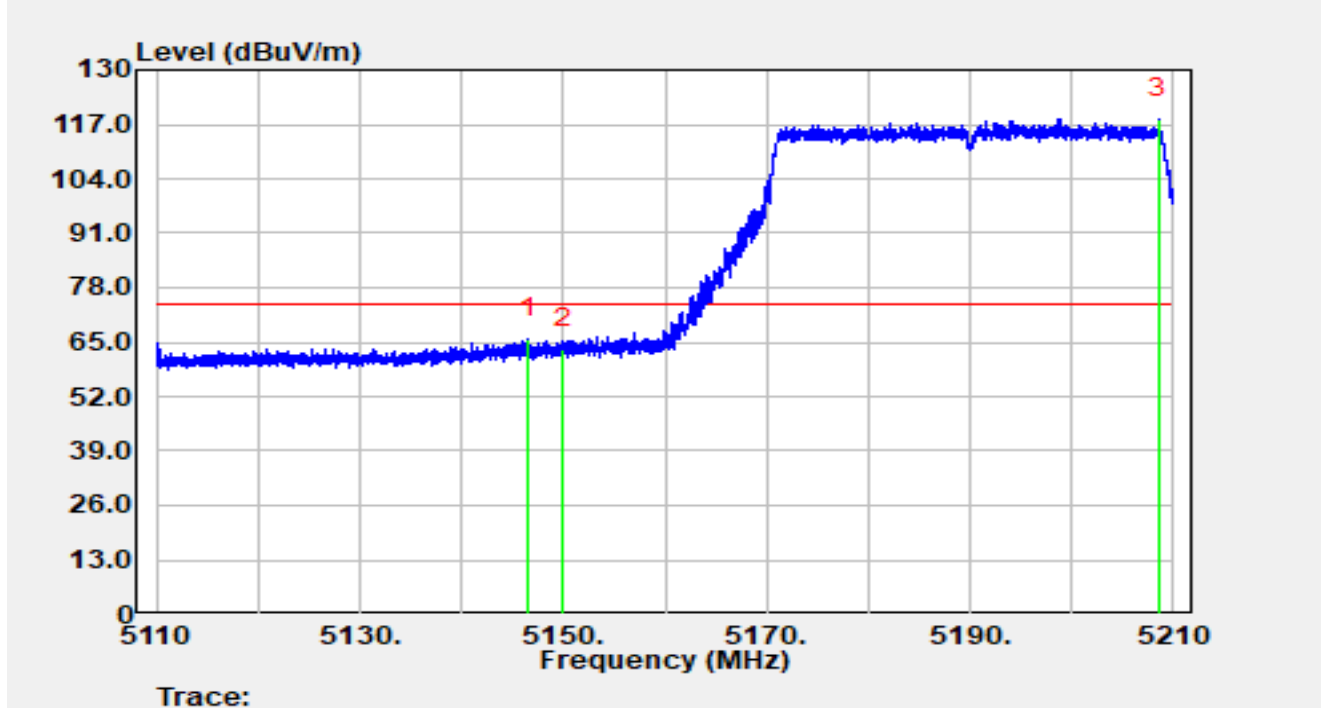


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.54	49.90	15.98	65.88	-8.12	74.00	Peak
2		5150.00	47.42	15.99	63.41	-10.59	74.00	Peak
3		5208.51	102.28	15.96	118.24	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-23
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5190 MHz		

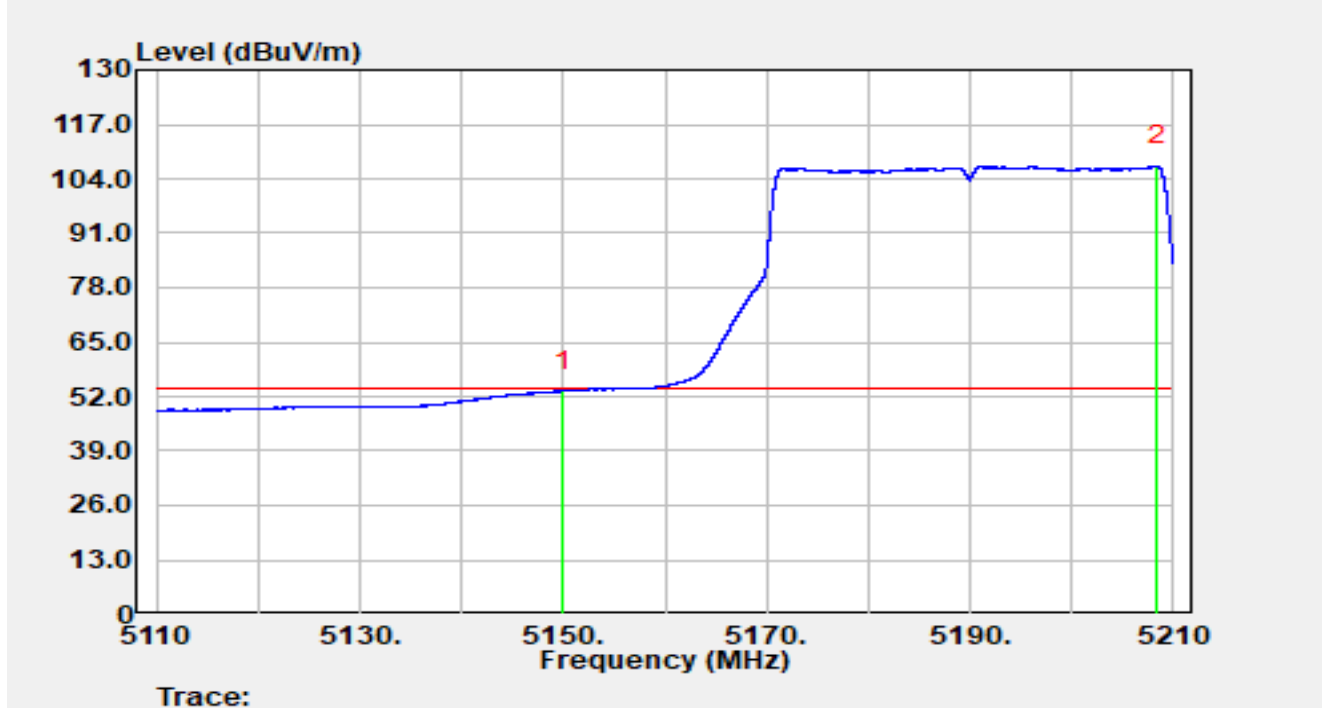


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.00	37.27	15.99	53.26	-0.74	54.00	Average
2		5208.46	91.05	15.96	107.01	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5310 MHz		

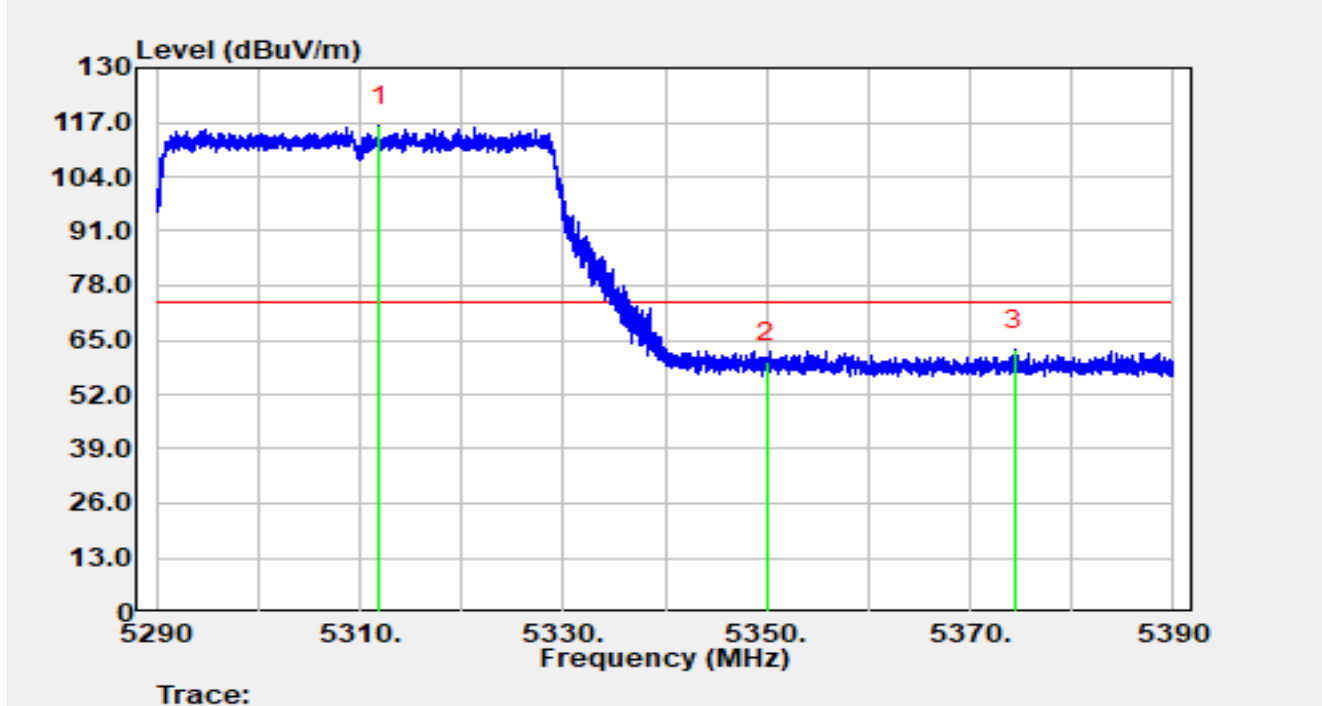


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.93	100.22	15.81	116.03	N/A	N/A	Peak
2		5350.00	44.01	15.72	59.74	-14.26	74.00	Peak
3	*	5374.36	46.66	15.93	62.59	-11.41	74.00	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5310 MHz		

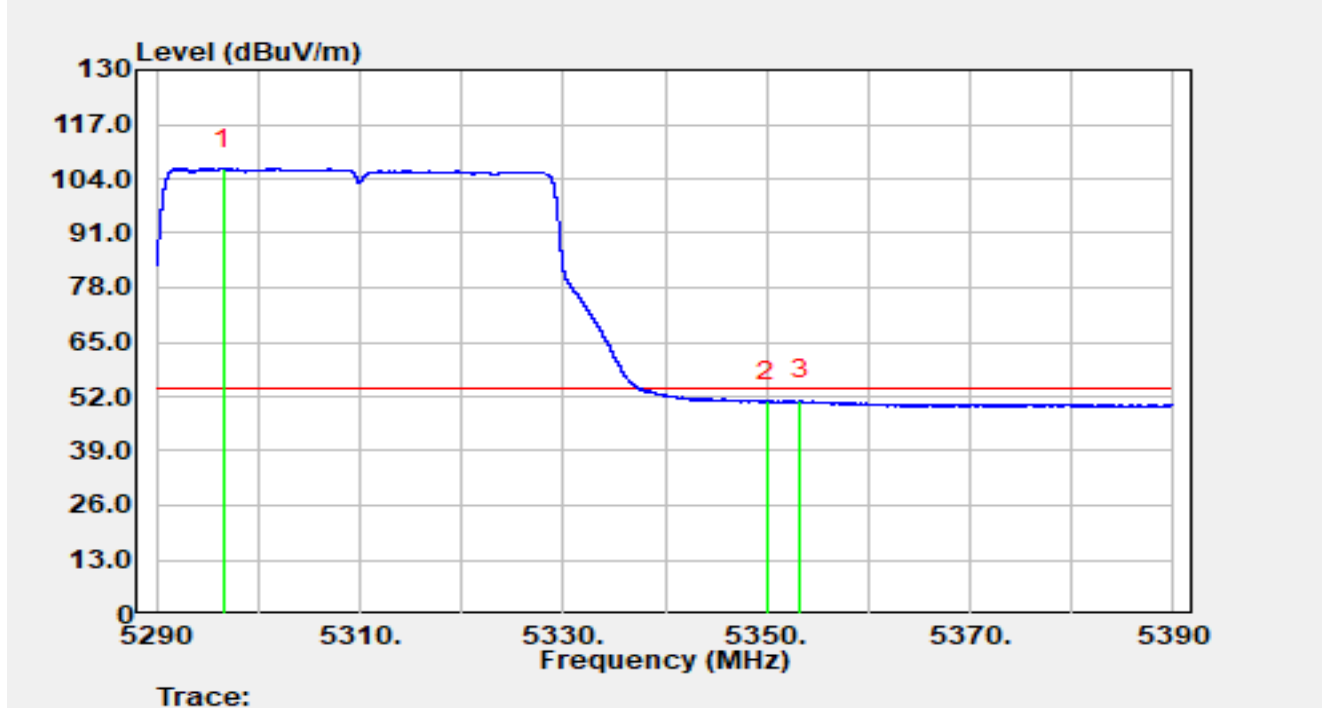


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5296.58	90.55	15.88	106.43	N/A	N/A	Average
2		5350.00	35.05	15.72	50.78	-3.22	54.00	Average
3	*	5353.23	35.30	15.75	51.05	-2.95	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5310 MHz		

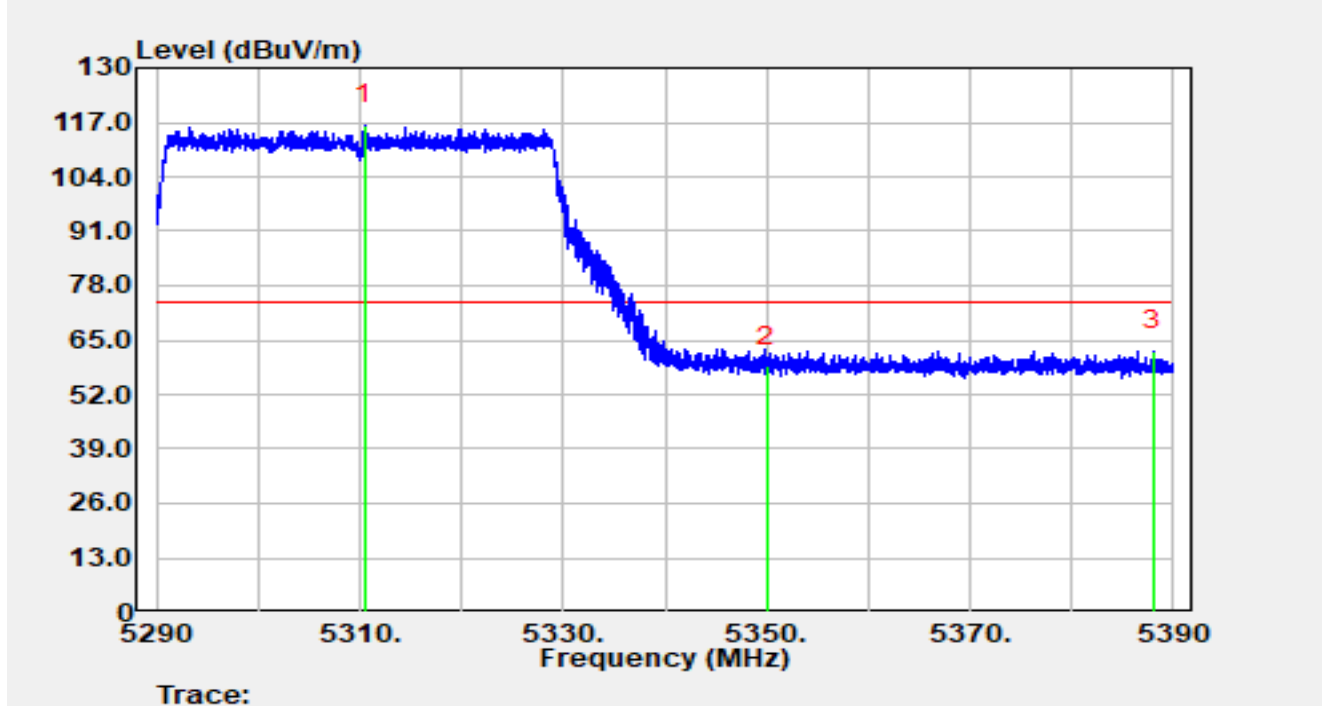


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5310.42	100.64	15.82	116.46	N/A	N/A	Peak
2		5350.00	43.06	15.72	58.79	-15.21	74.00	Peak
3	*	5388.05	46.48	15.92	62.40	-11.60	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5310 MHz		

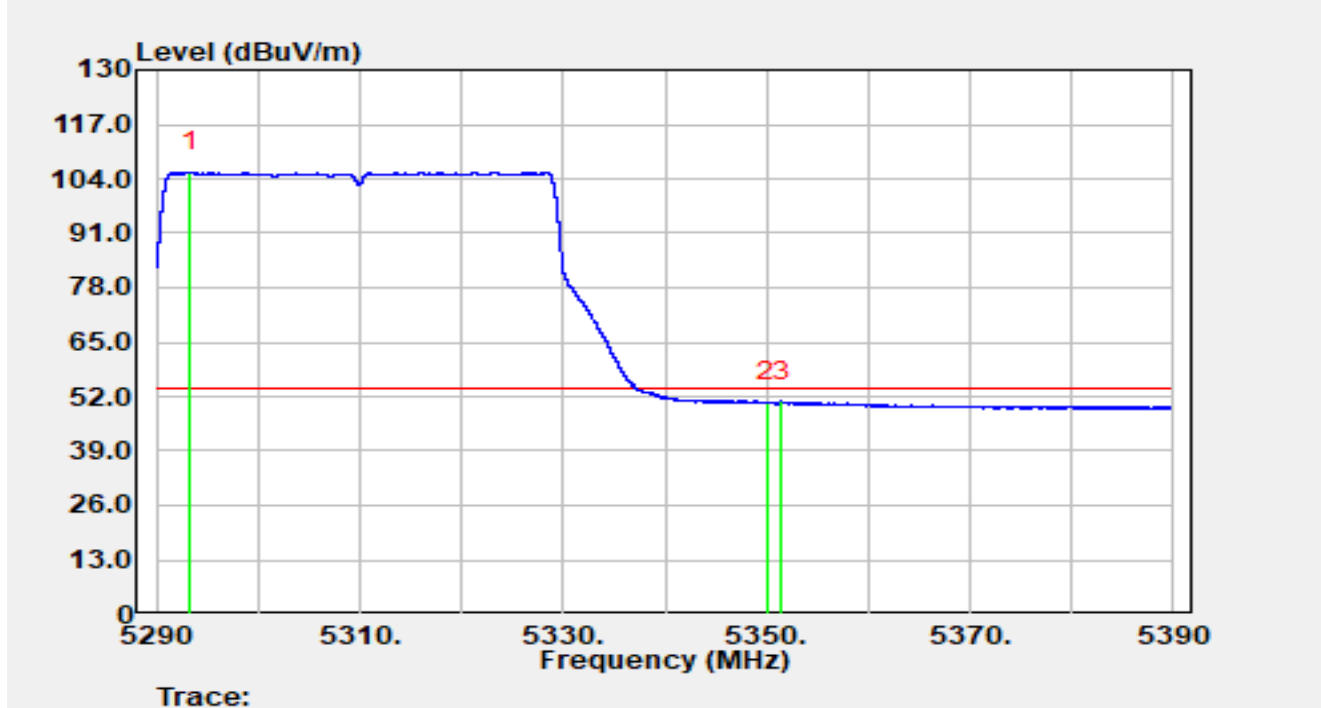


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5293.32	89.84	15.87	105.71	N/A	N/A	Average
2		5350.00	34.97	15.72	50.69	-3.31	54.00	Average
3	*	5351.44	35.04	15.74	50.78	-3.22	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5510 MHz		

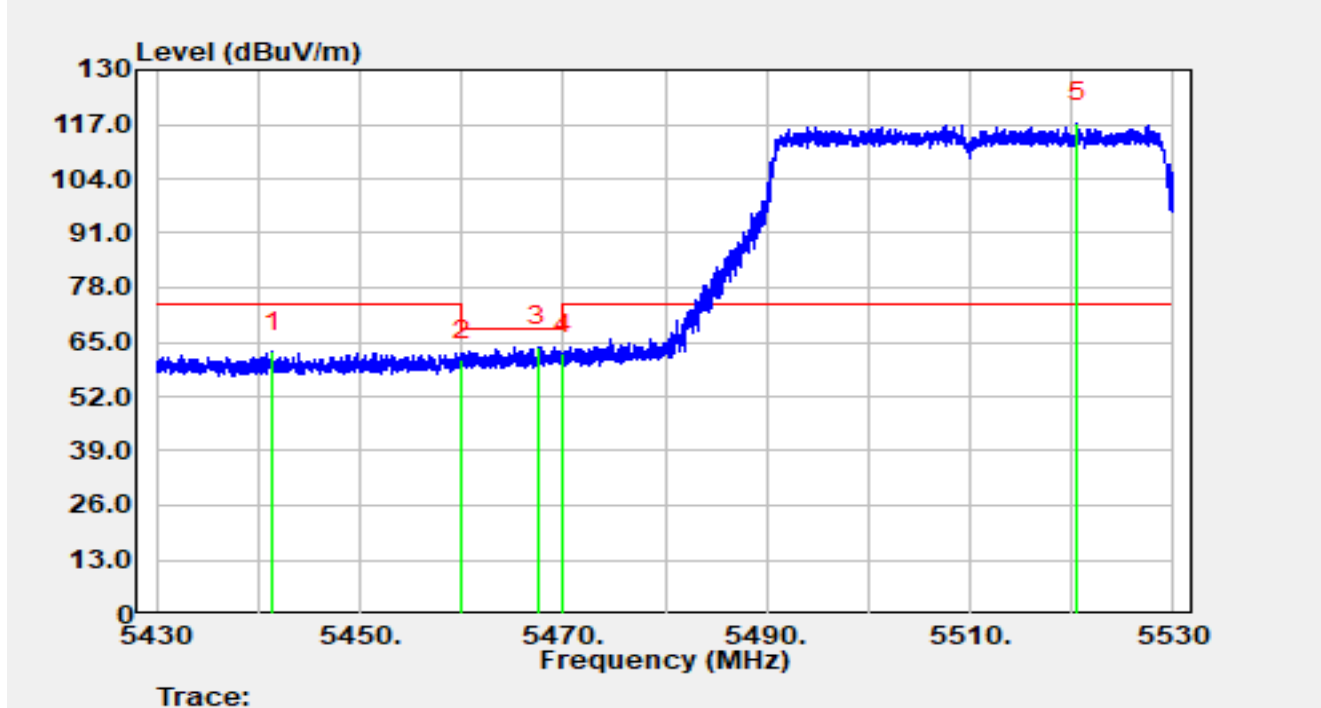


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5441.42	46.73	15.82	62.55	-11.45	74.00	Peak
2		5460.00	44.69	16.00	60.69	-7.51	68.20	Peak
3	*	5467.47	47.91	15.95	63.86	-4.34	68.20	Peak
4		5470.00	46.26	15.97	62.23	-5.97	68.20	Peak
5		5520.58	101.11	16.29	117.40	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5510 MHz		

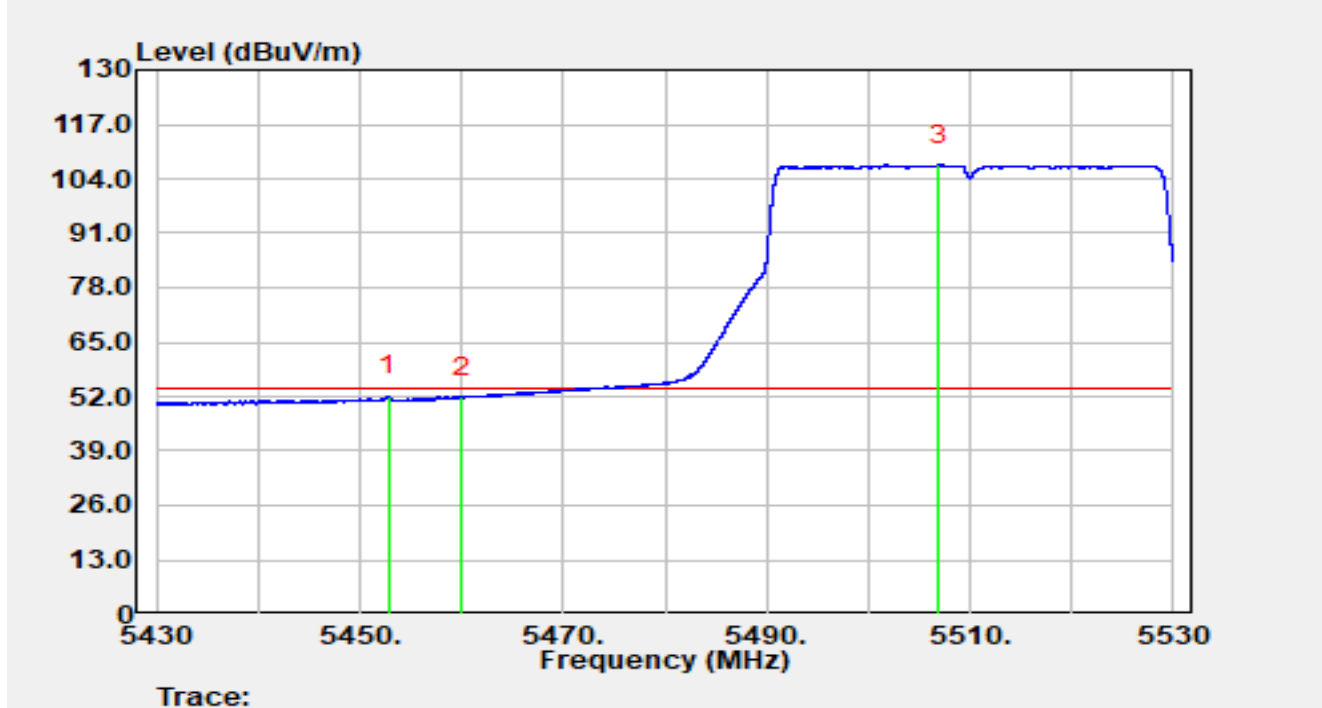


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5452.77	36.10	16.03	52.13	-1.87	54.00	Average
2		5460.00	35.78	16.00	51.78	-2.22	54.00	Average
3		5506.97	91.01	16.30	107.31	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5510 MHz		

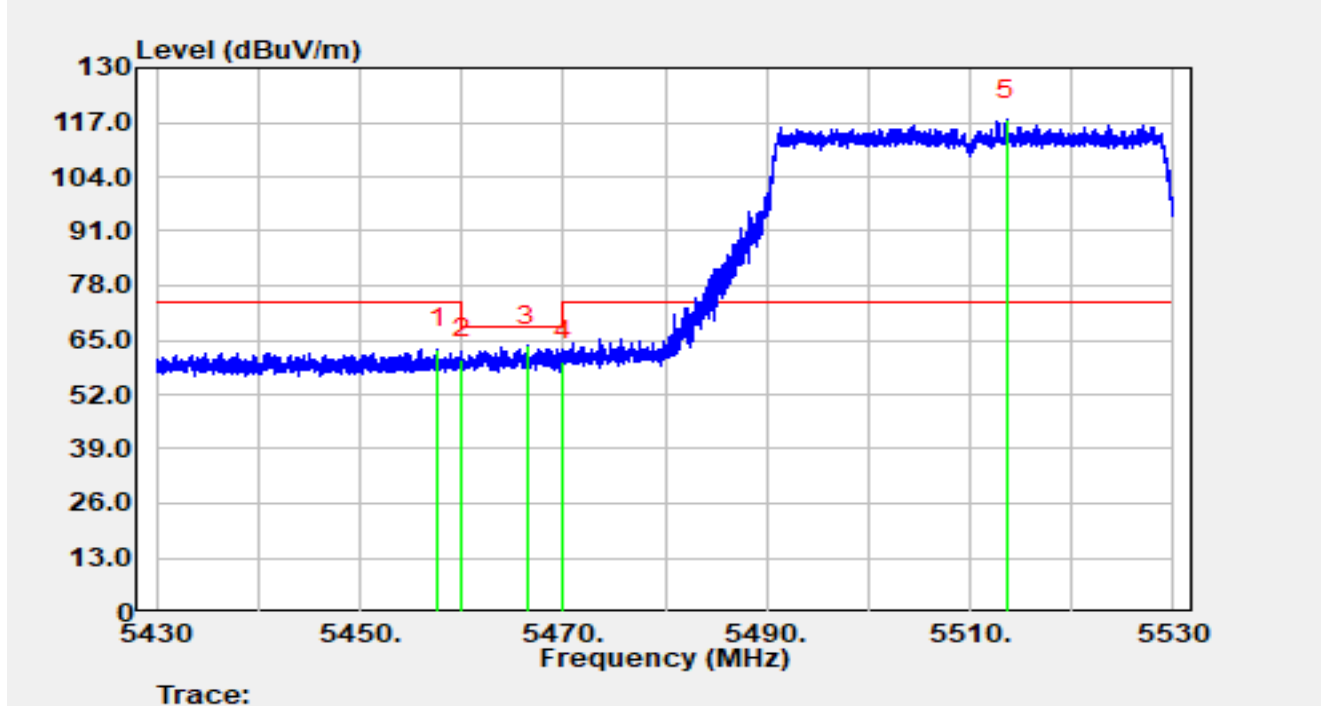


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.66	46.81	16.01	62.82	-11.18	74.00	Peak
2		5460.00	44.34	16.00	60.34	-7.86	68.20	Peak
3	*	5466.48	47.62	15.96	63.58	-4.62	68.20	Peak
4		5470.00	44.08	15.97	60.05	-8.15	68.20	Peak
5		5513.55	101.24	16.29	117.53	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5510 MHz		

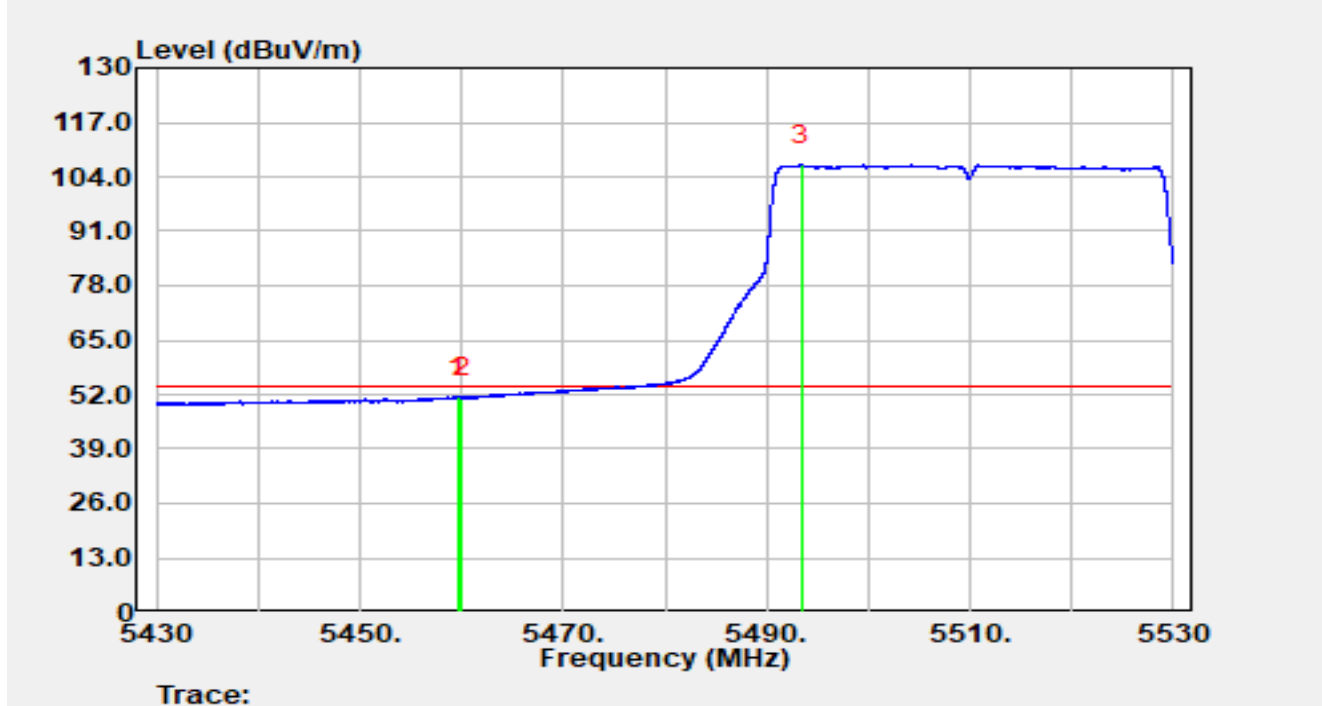


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.68	35.41	16.00	51.41	-2.59	54.00	Average
2		5460.00	35.03	16.00	51.03	-2.97	54.00	Average
3		5493.44	90.59	16.24	106.83	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5670 MHz		

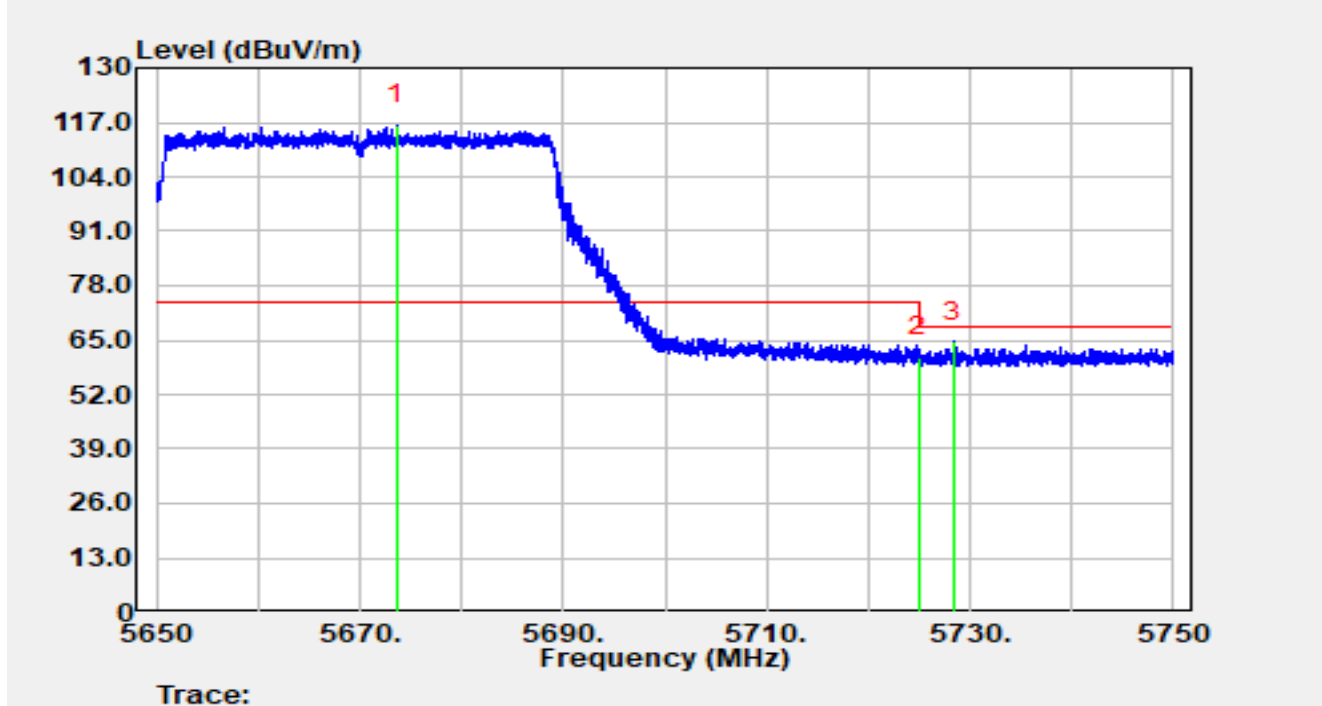


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5673.61	99.48	16.95	116.44	N/A	N/A	Peak
2		5725.00	43.88	16.98	60.86	-7.34	68.20	Peak
3	*	5728.40	47.77	16.97	64.74	-3.46	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5670 MHz		

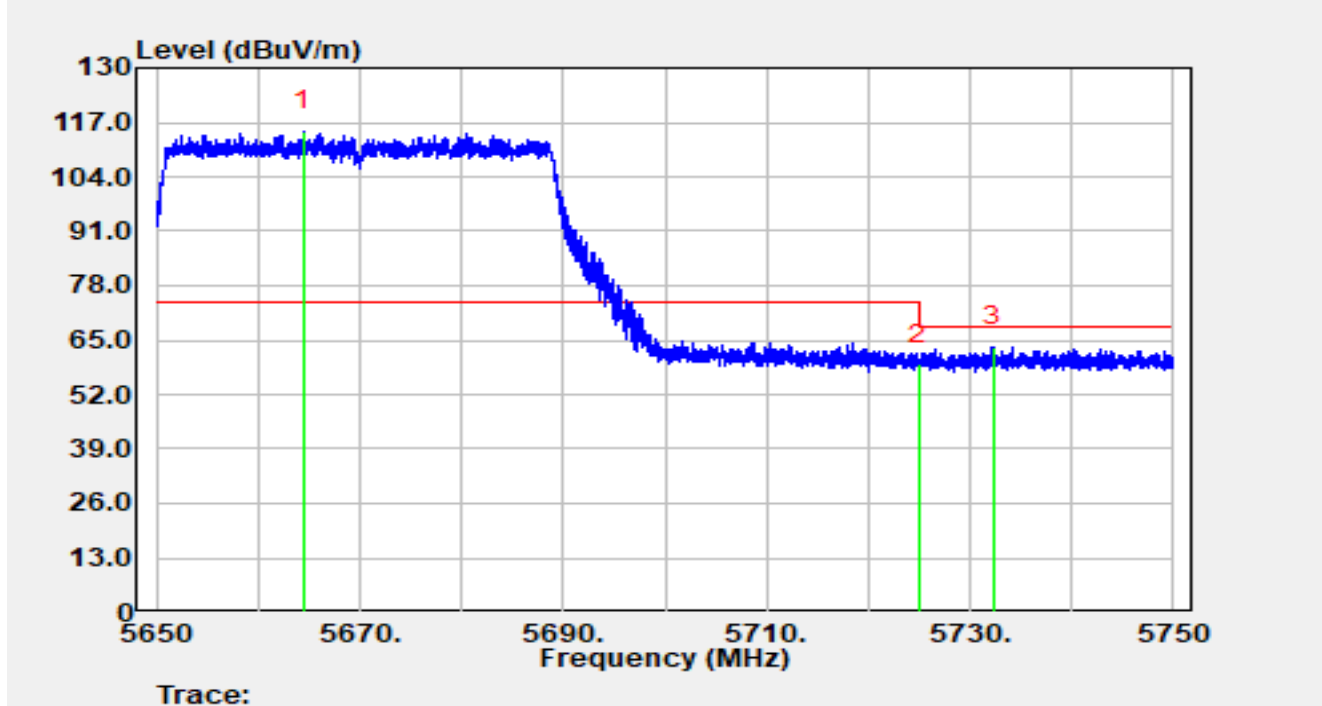


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5664.49	98.06	16.88	114.95	N/A	N/A	Peak
2		5725.00	42.36	16.98	59.33	-8.87	68.20	Peak
3	*	5732.25	46.35	16.97	63.31	-4.89	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5755 MHz		

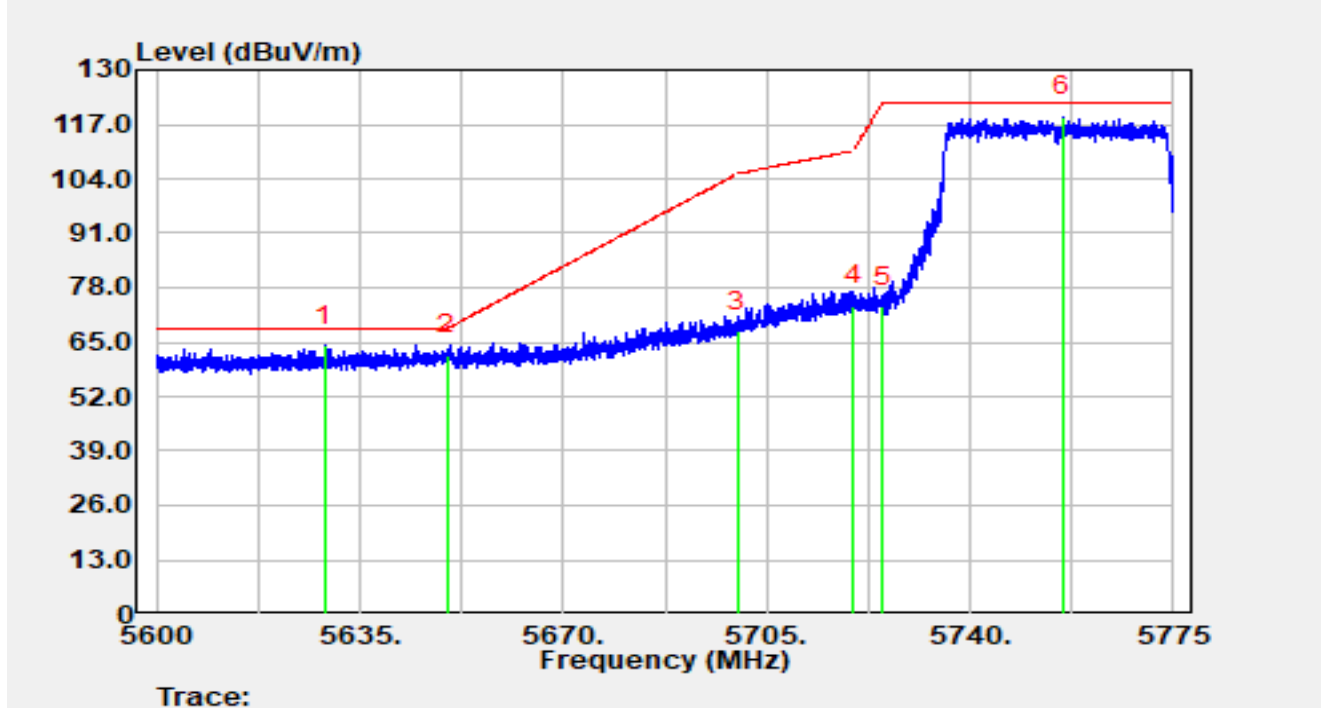


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5628.98	47.53	16.59	64.12	-4.08	68.20	Peak
2		5650.00	45.26	16.79	62.06	-6.14	68.20	Peak
3		5700.00	50.54	17.03	67.57	-37.63	105.20	Peak
4		5720.00	56.73	16.98	73.72	-37.08	110.80	Peak
5		5725.00	56.41	16.98	73.38	-48.82	122.20	Peak
6		5755.93	101.77	17.08	118.84	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5755 MHz		

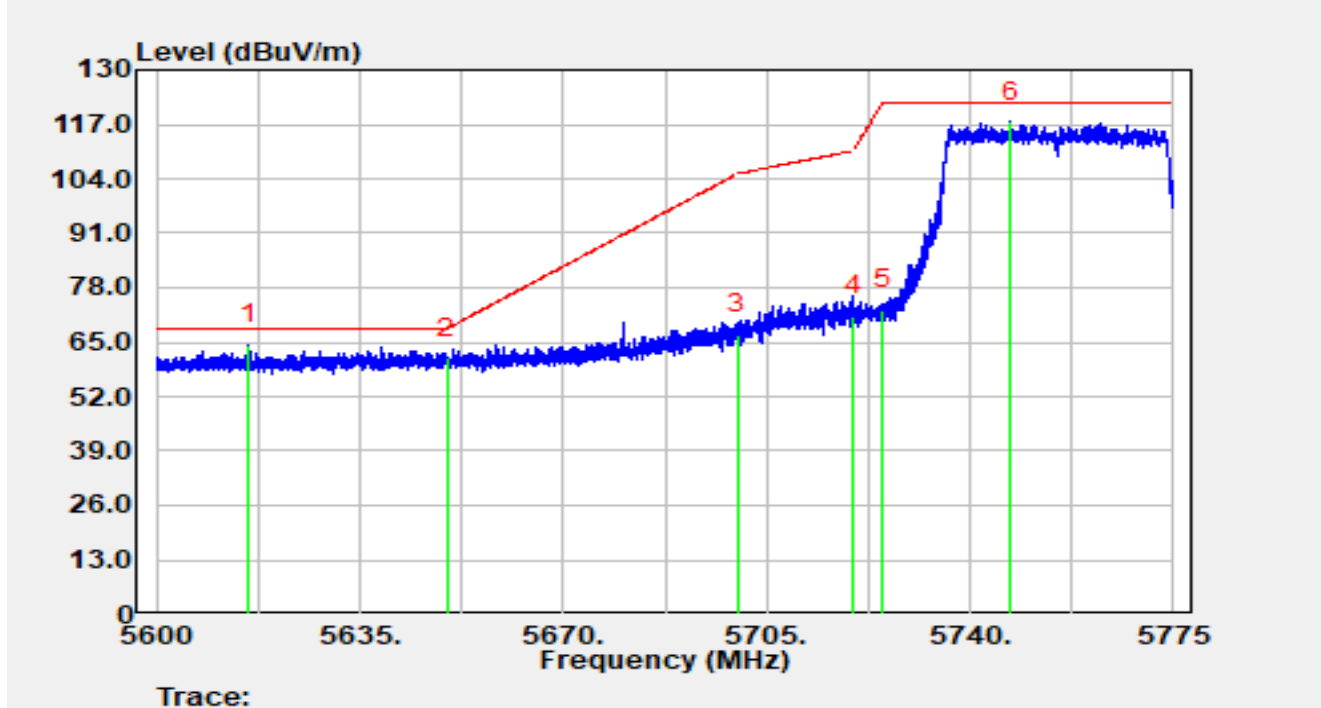


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5615.94	47.87	16.51	64.37	-3.83	68.20	Peak
2		5650.00	44.43	16.79	61.22	-6.98	68.20	Peak
3		5700.00	49.91	17.03	66.94	-38.26	105.20	Peak
4		5720.00	54.18	16.98	71.16	-39.64	110.80	Peak
5		5725.00	55.73	16.98	72.71	-49.49	122.20	Peak
6		5747.00	100.57	17.00	117.57	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5795 MHz		

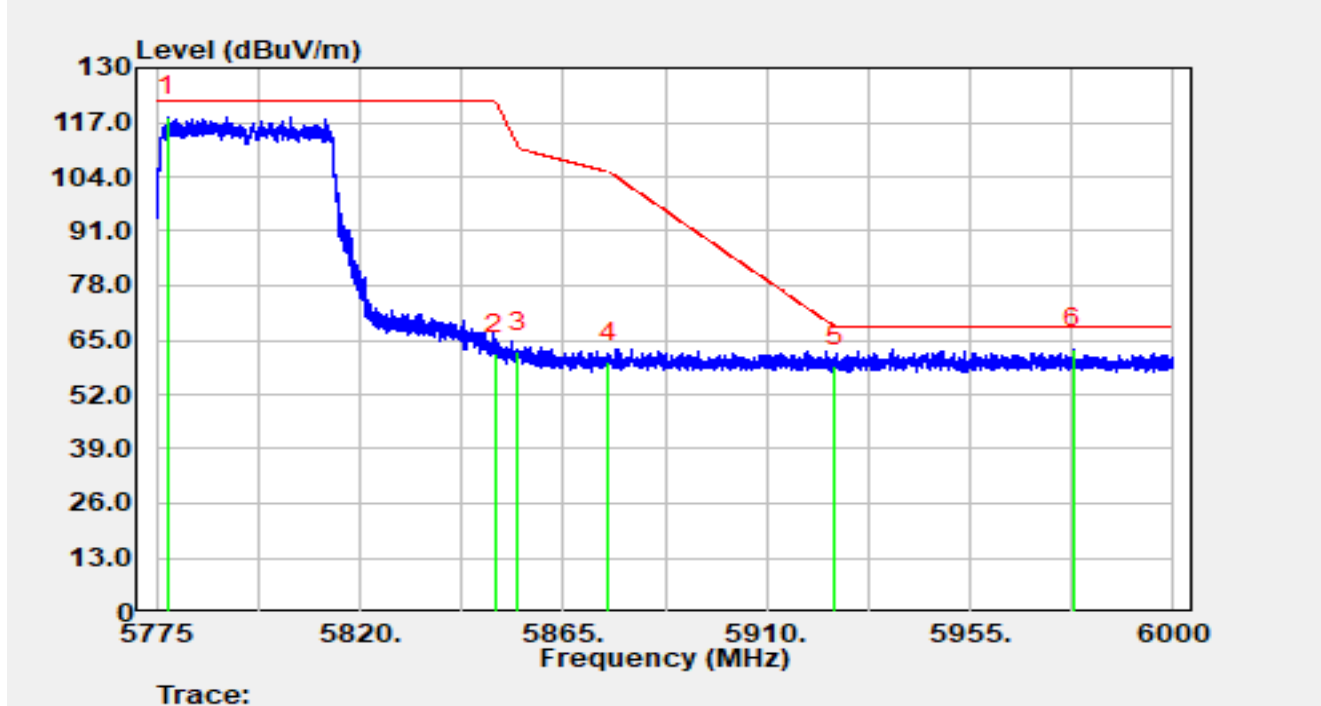


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5777.57	101.17	17.22	118.39	N/A	N/A	Peak
2		5850.00	44.01	17.56	61.58	-60.62	122.20	Peak
3		5855.00	44.56	17.52	62.08	-48.72	110.80	Peak
4		5875.00	42.17	17.61	59.78	-45.42	105.20	Peak
5		5925.00	41.37	17.49	58.86	-9.34	68.20	Peak
6	*	5977.82	45.09	17.76	62.85	-5.35	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE40 at 5795 MHz		

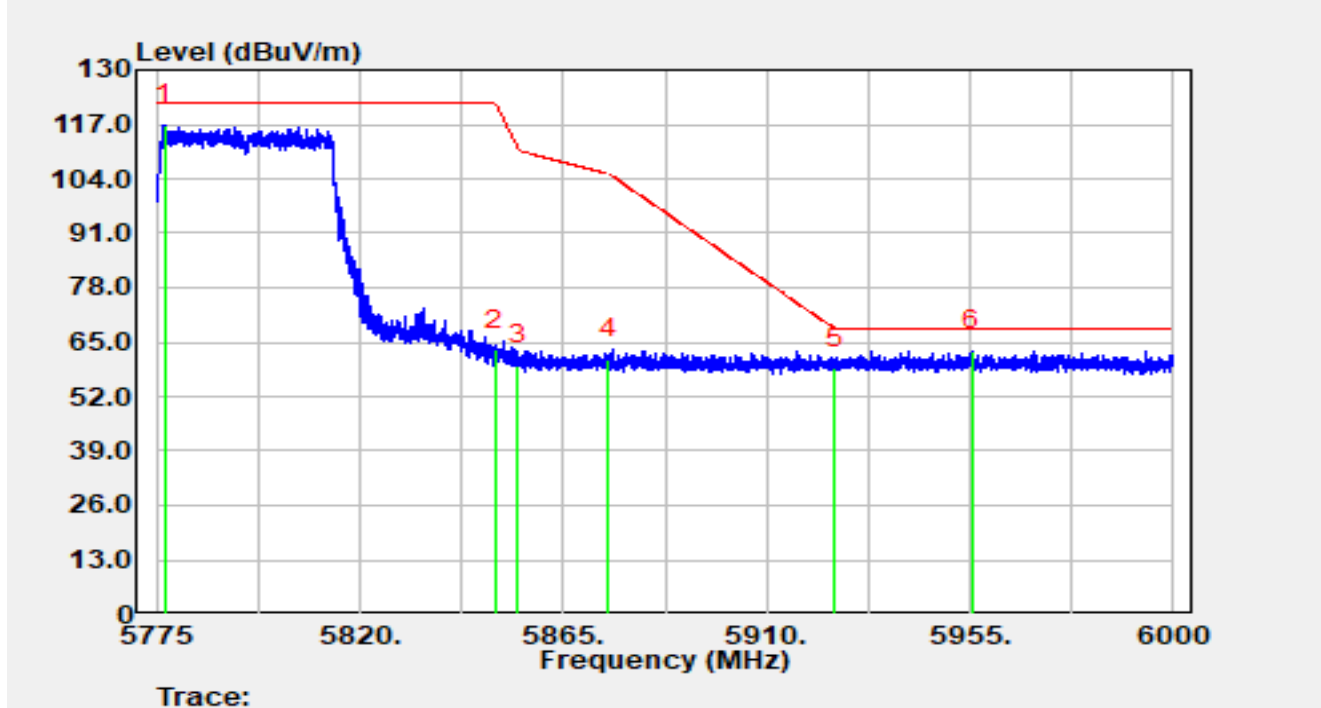


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5776.71	99.59	17.22	116.81	N/A	N/A	Peak
2		5850.00	45.48	17.56	63.05	-59.15	122.20	Peak
3		5855.00	41.86	17.52	59.38	-51.42	110.80	Peak
4		5875.00	43.40	17.61	61.01	-44.19	105.20	Peak
5		5925.00	41.33	17.49	58.81	-9.39	68.20	Peak
6	*	5955.43	45.31	17.65	62.96	-5.24	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5210 MHz		

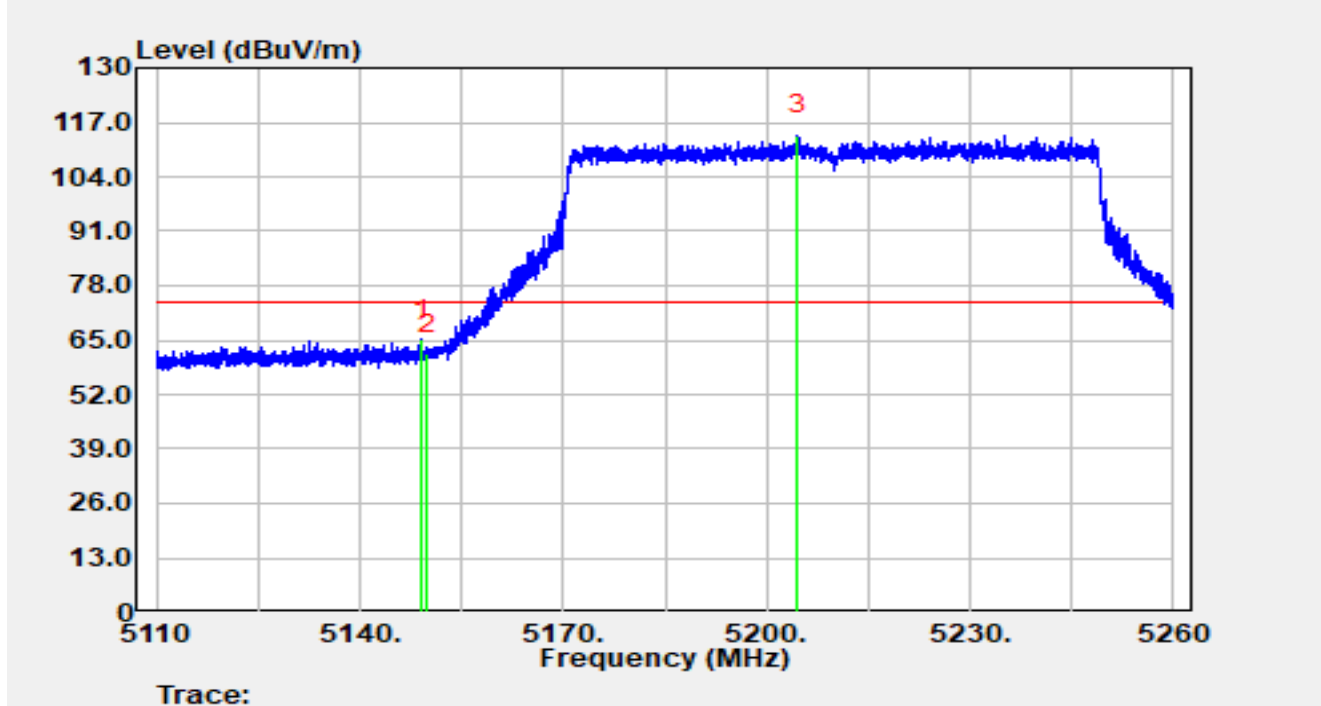


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.20	49.03	15.99	65.02	-8.98	74.00	Peak
2		5150.00	45.69	15.99	61.68	-12.32	74.00	Peak
3		5204.62	97.84	15.97	113.81	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5210 MHz		

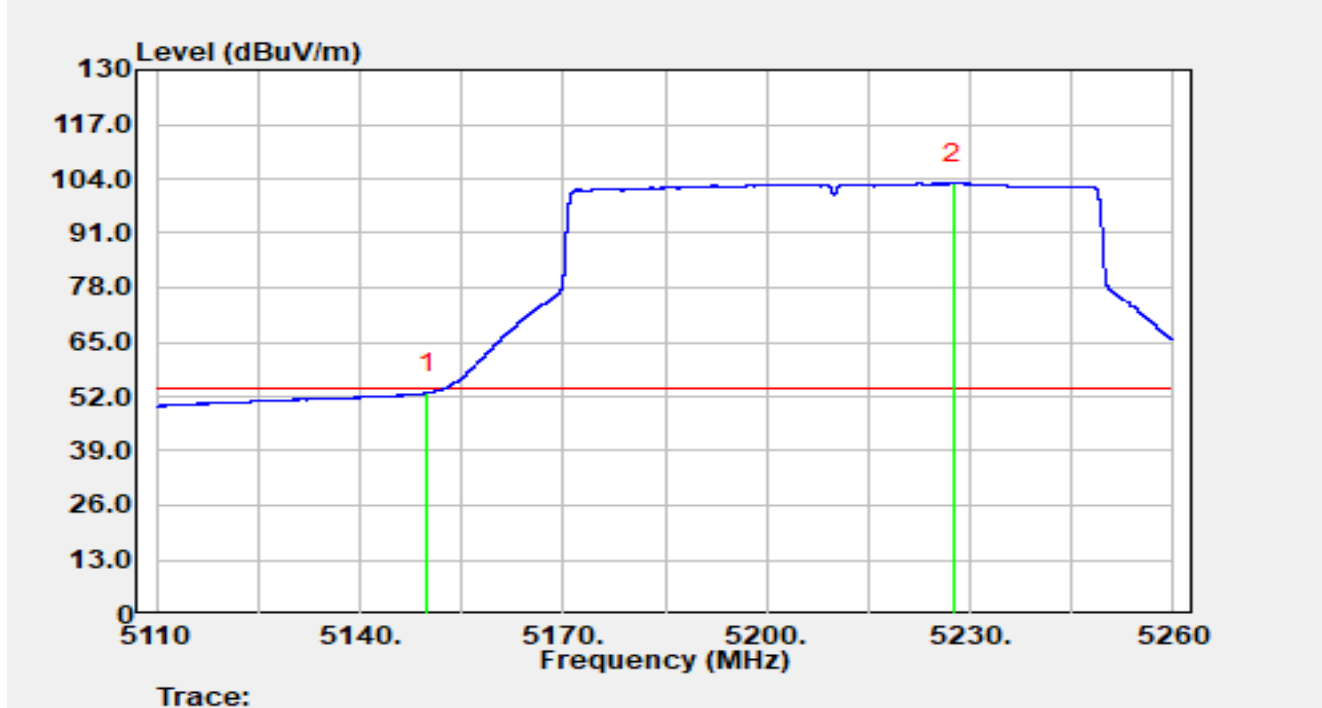


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.00	36.90	15.99	52.89	-1.11	54.00	Average
2		5227.59	86.74	16.26	103.00	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5210 MHz		

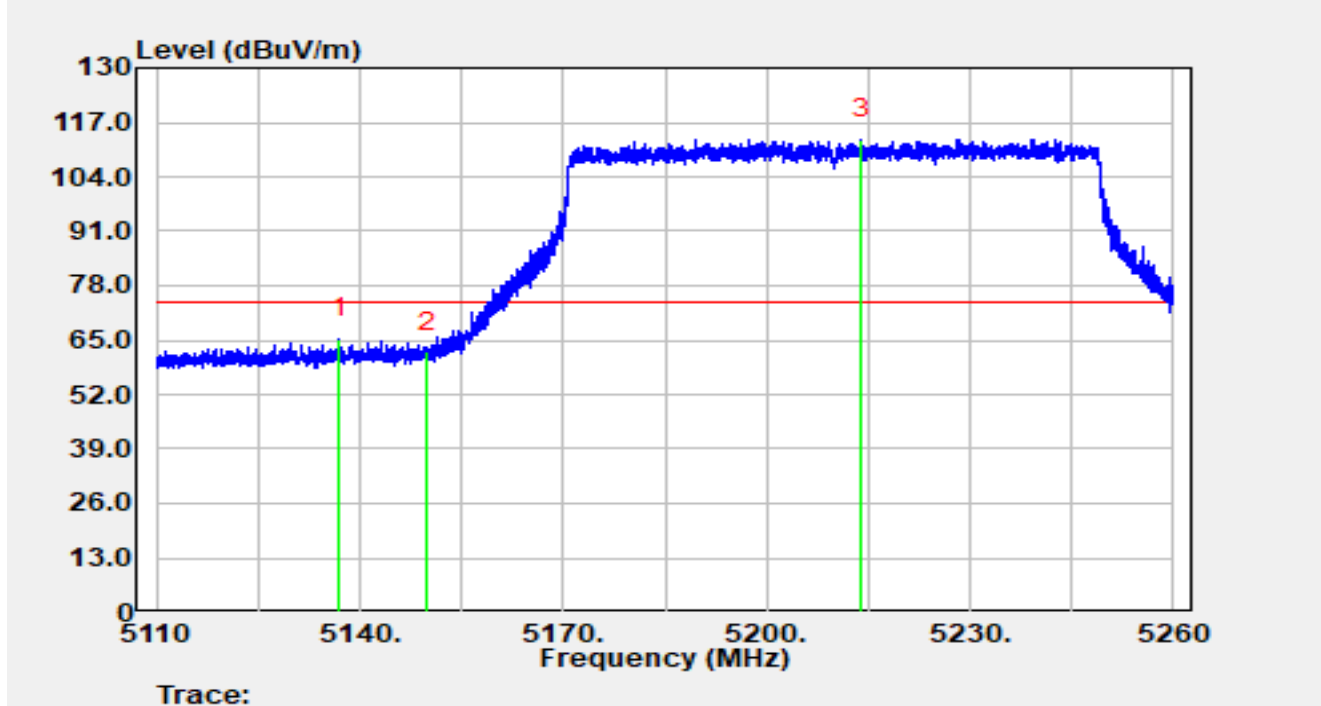


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5136.97	49.48	16.00	65.48	-8.52	74.00	Peak
2		5150.00	46.21	15.99	62.20	-11.80	74.00	Peak
3		5213.97	97.01	15.97	112.98	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5210 MHz		

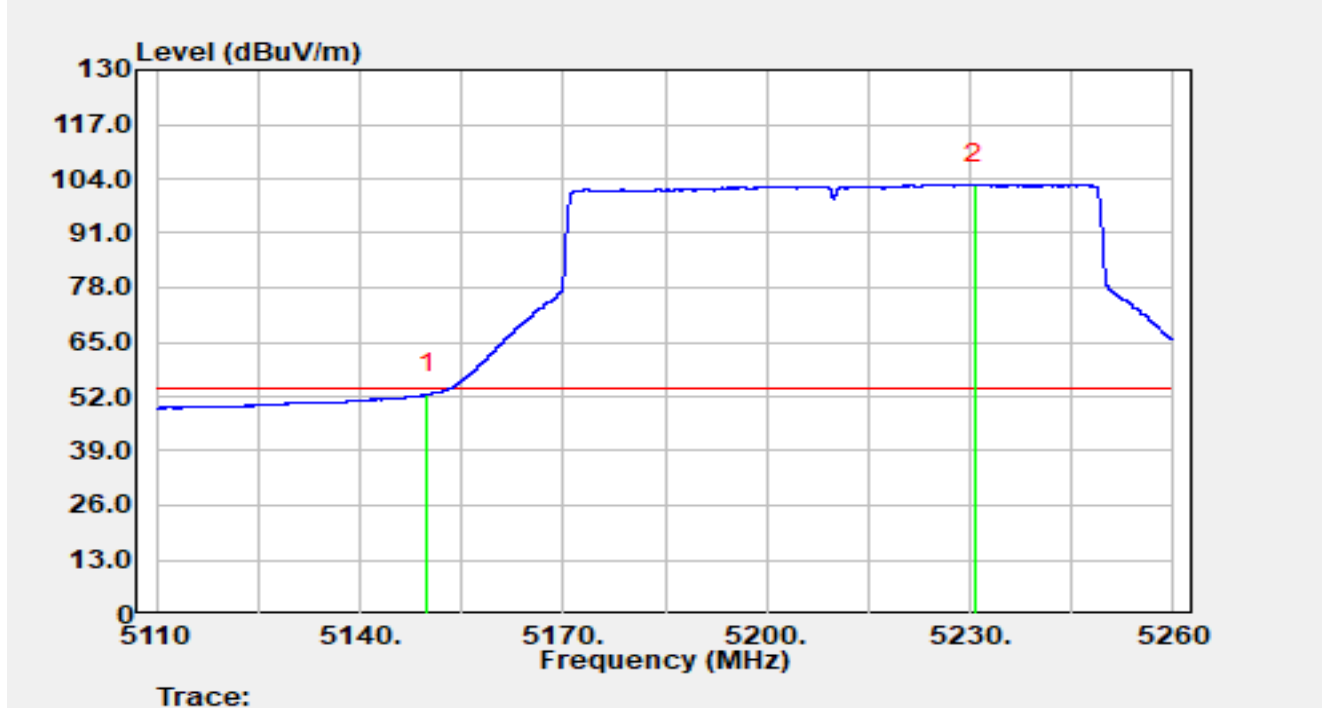


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.00	36.53	15.99	52.52	-1.48	54.00	Average
2		5230.74	86.45	16.28	102.73	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-08-08
Temperature	27.6°C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5290 MHz		

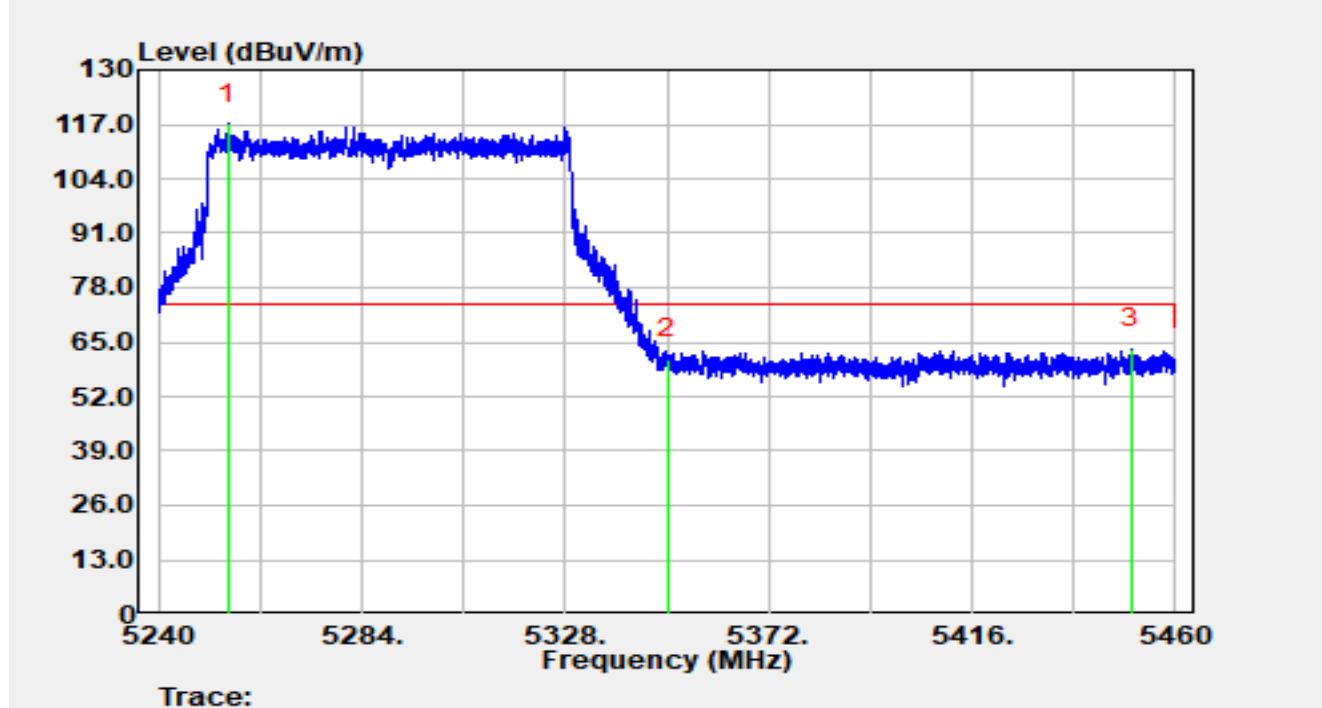


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5255.00	101.20	15.91	117.11	N/A	N/A	Peak
2		5350.00	45.35	15.72	61.07	-12.93	74.00	Peak
3	*	5450.36	47.50	16.01	63.51	-10.49	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-08-08
Temperature	27.6°C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5290 MHz		

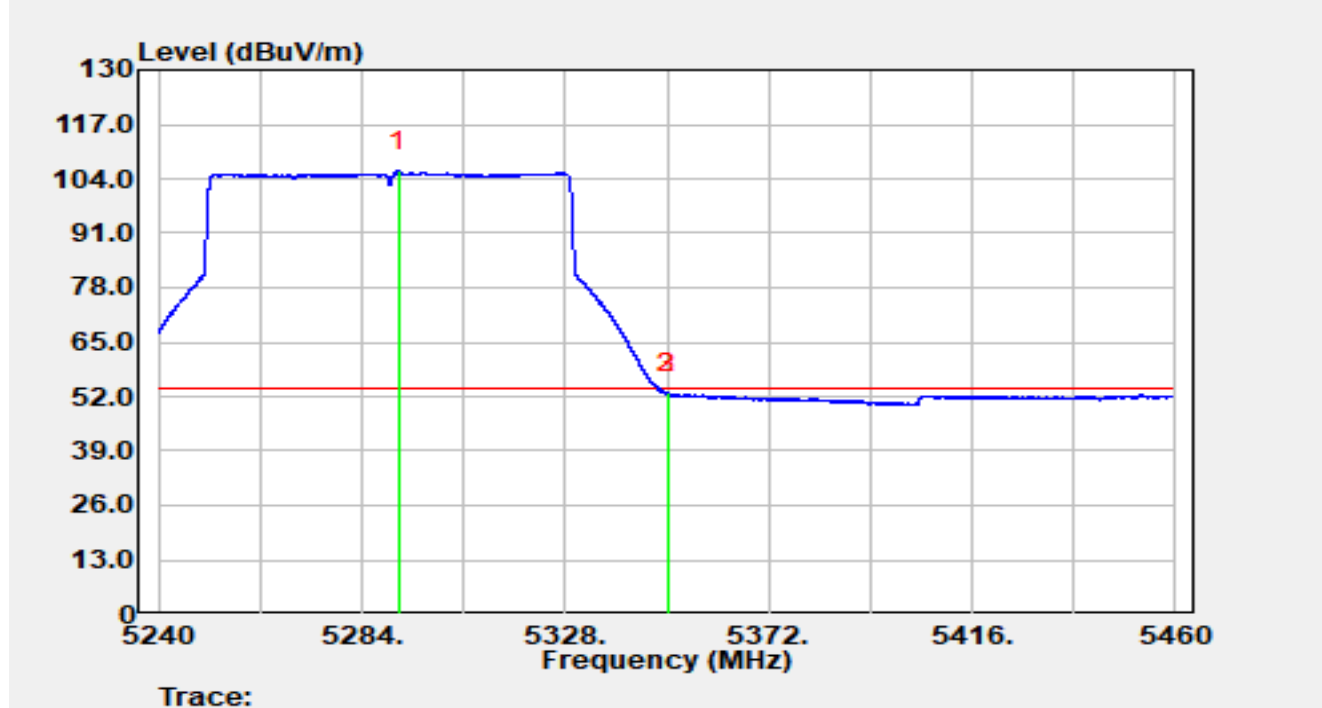


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5291.94	89.94	15.86	105.80	N/A	N/A	Average
2		5350.00	36.91	15.72	52.64	-1.36	54.00	Average
3	*	5350.29	37.03	15.73	52.76	-1.24	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-08-08
Temperature	27.6°C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5290 MHz		

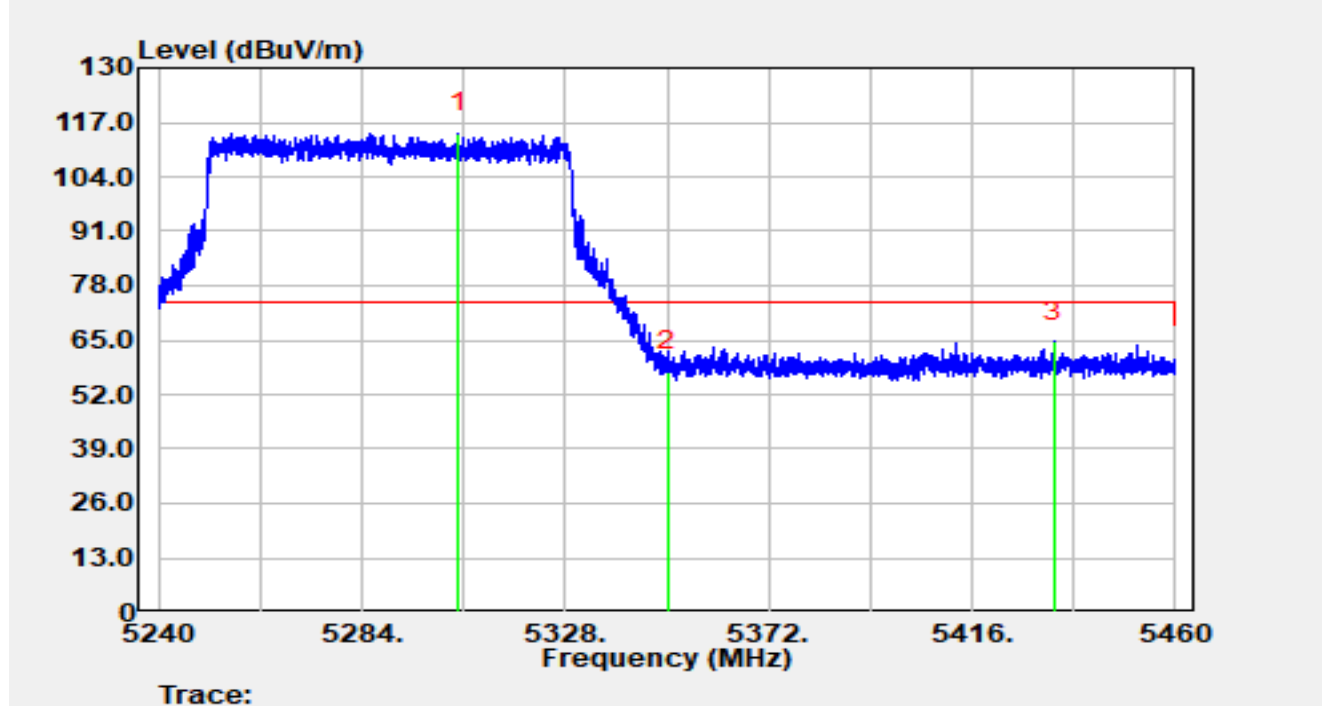


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5304.81	98.46	15.85	114.30	N/A	N/A	Peak
2		5350.00	41.79	15.72	57.51	-16.49	74.00	Peak
3	*	5433.64	49.07	15.67	64.73	-9.27	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-08-08
Temperature	27.6°C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5290 MHz		

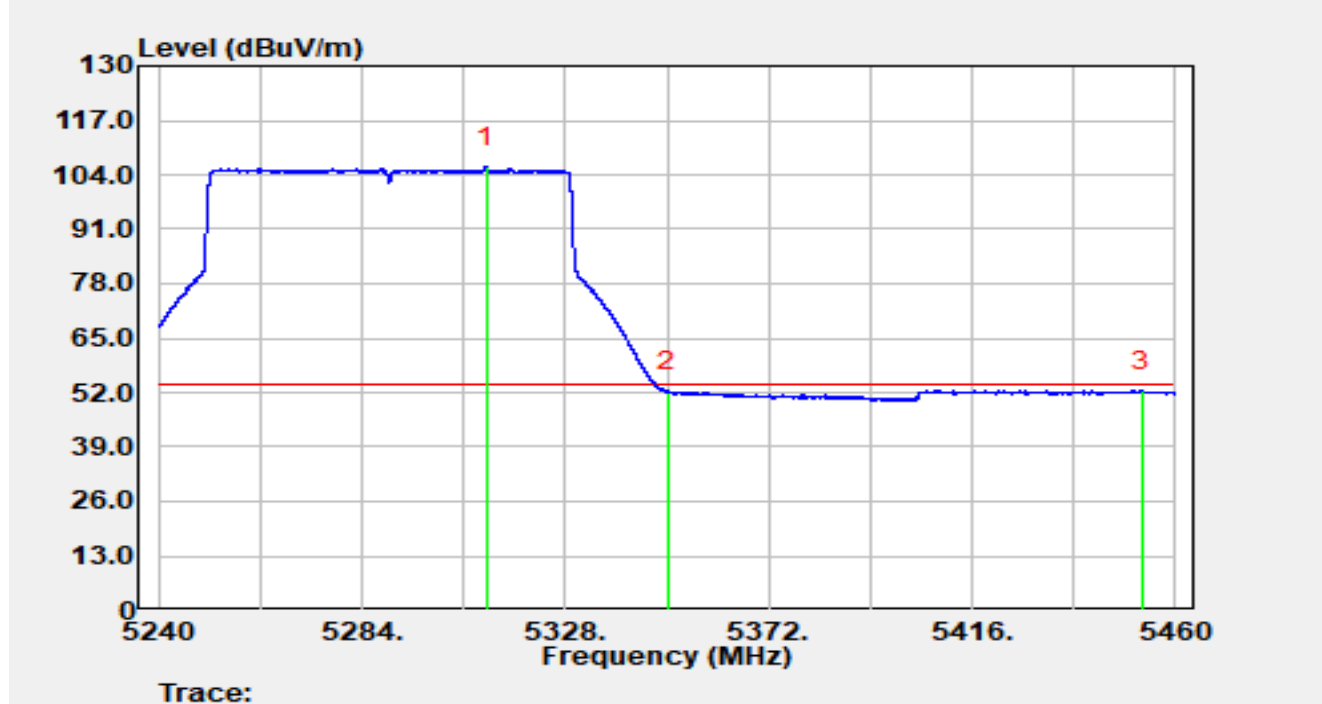


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5310.88	89.92	15.82	105.74	N/A	N/A	Average
2		5350.00	36.48	15.72	52.21	-1.79	54.00	Average
3	*	5452.70	36.36	16.03	52.39	-1.61	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5530 MHz		

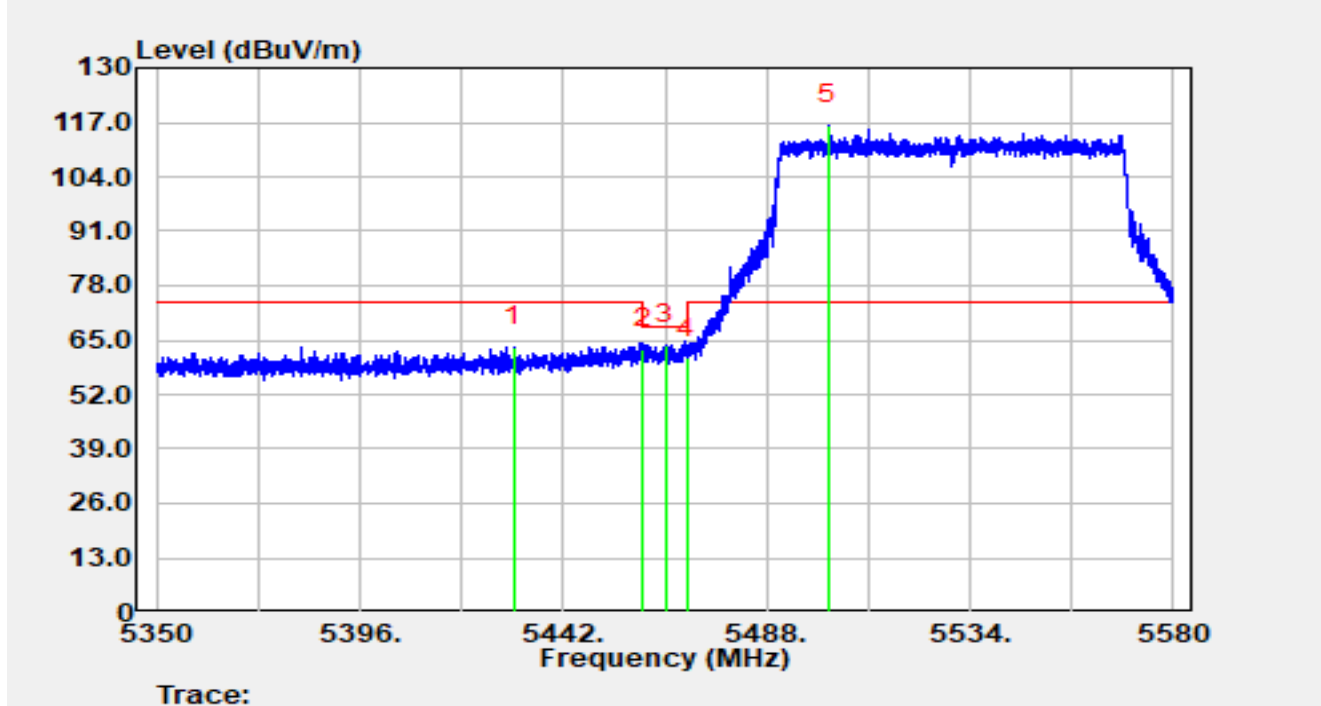


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5430.75	47.74	15.68	63.43	-10.57	74.00	Peak
2		5460.00	46.80	16.00	62.80	-5.40	68.20	Peak
3	*	5465.30	47.93	15.97	63.90	-4.30	68.20	Peak
4		5470.00	44.80	15.97	60.77	-7.43	68.20	Peak
5		5501.96	99.97	16.30	116.27	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5530 MHz		

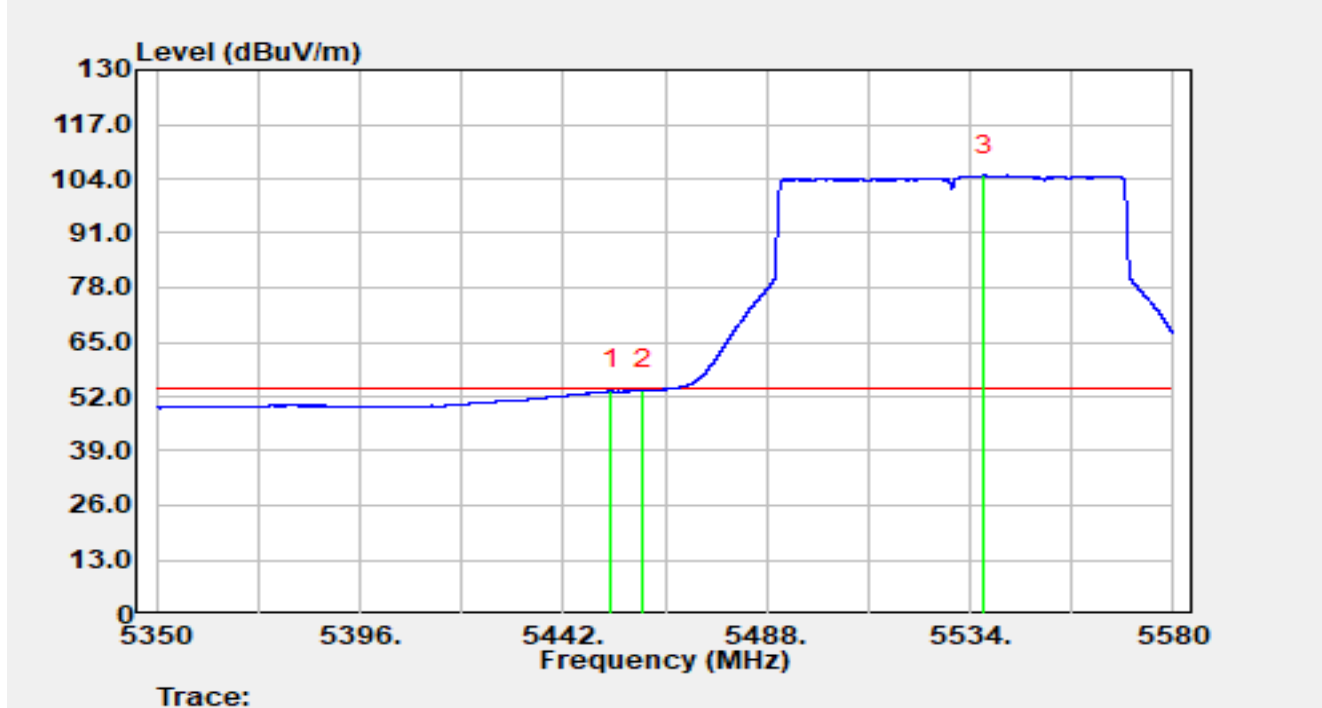


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5452.76	37.56	16.03	53.59	-0.41	54.00	Average
2		5460.00	37.52	16.00	53.52	-0.48	54.00	Average
3		5537.17	88.24	16.55	104.79	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5530 MHz		

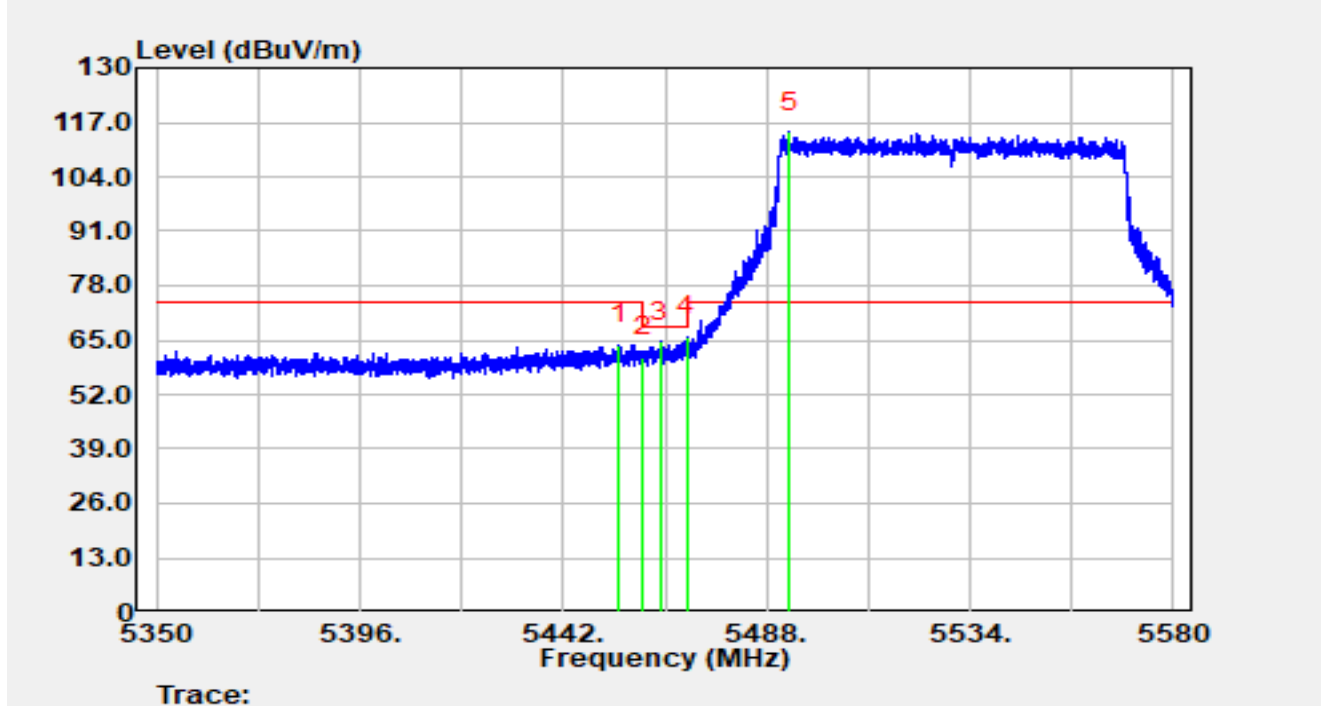


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5454.58	47.97	16.02	63.99	-10.01	74.00	Peak
2		5460.00	44.91	16.00	60.91	-7.29	68.20	Peak
3		5463.87	48.55	15.98	64.53	-3.67	68.20	Peak
4	*	5470.00	49.92	15.97	65.88	-2.32	68.20	Peak
5		5493.08	98.41	16.23	114.64	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5530 MHz		

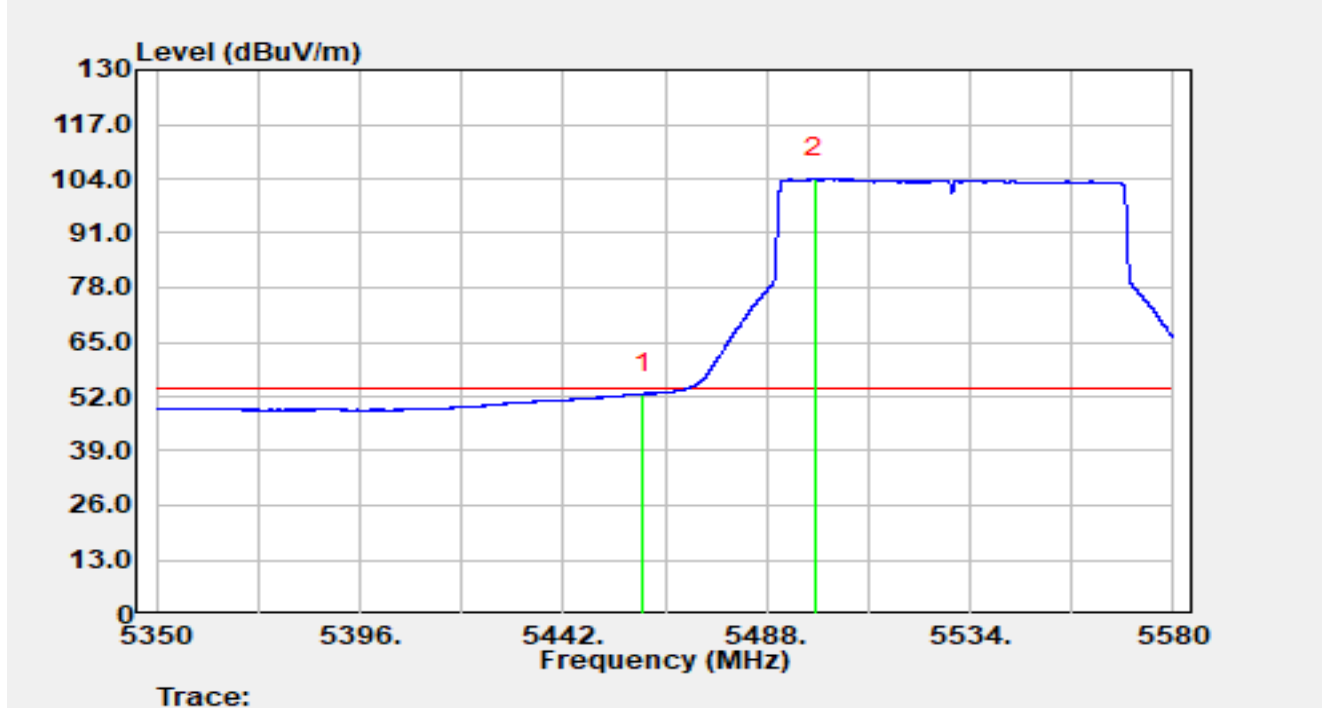


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.00	36.61	16.00	52.61	-1.39	54.00	Average
2		5498.74	87.76	16.27	104.03	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-30
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5610 MHz		

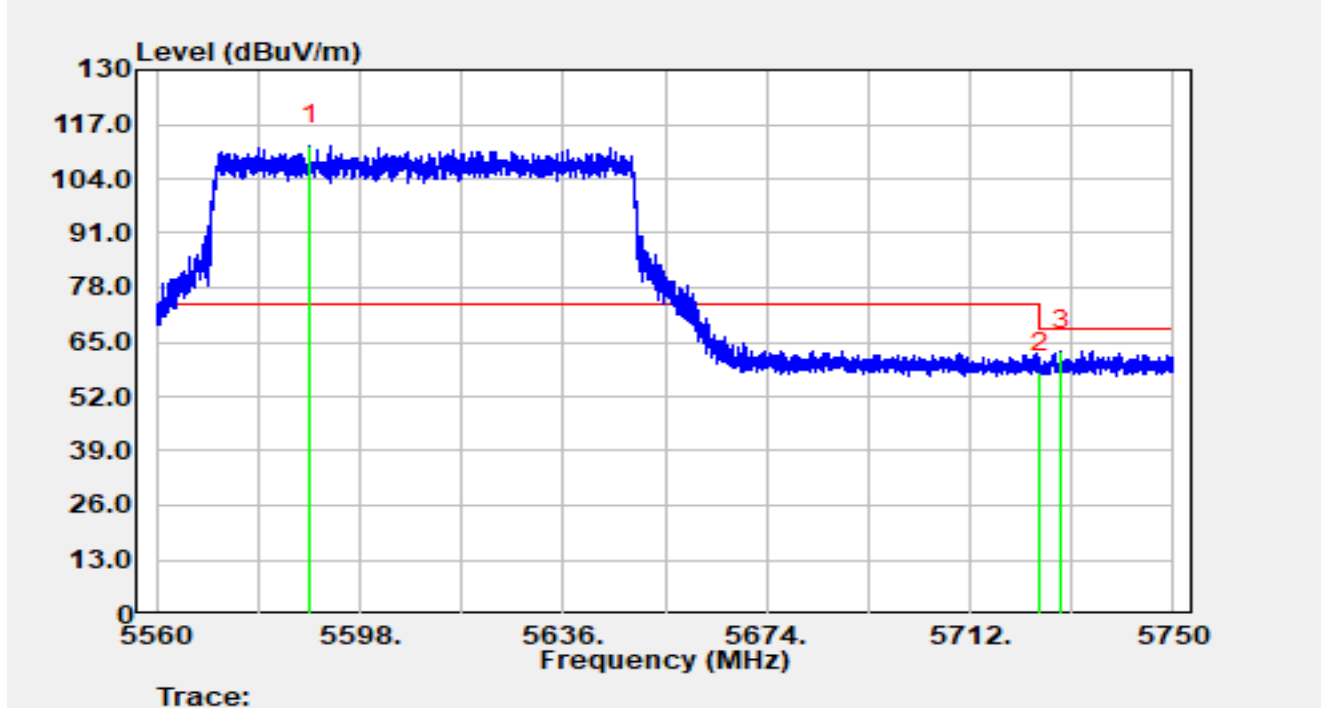


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5588.65	95.47	16.46	111.94	N/A	N/A	Peak
2		5725.00	40.75	16.98	57.73	-10.47	68.20	Peak
3	*	5729.06	45.83	16.97	62.80	-5.40	68.20	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-30
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5610 MHz		

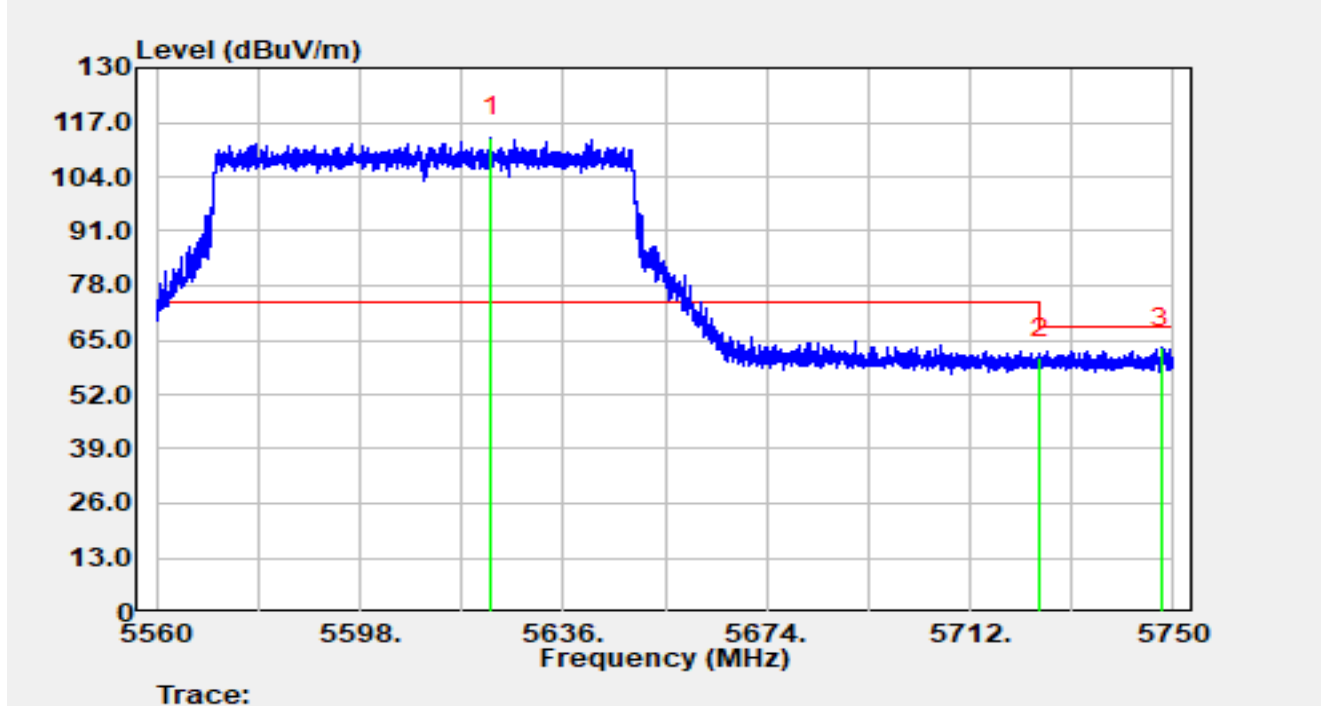


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5622.49	96.99	16.47	113.47	N/A	N/A	Peak
2		5725.00	43.85	16.98	60.83	-7.37	68.20	Peak
3	*	5747.82	46.16	17.01	63.17	-5.03	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-08-04
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5775 MHz		

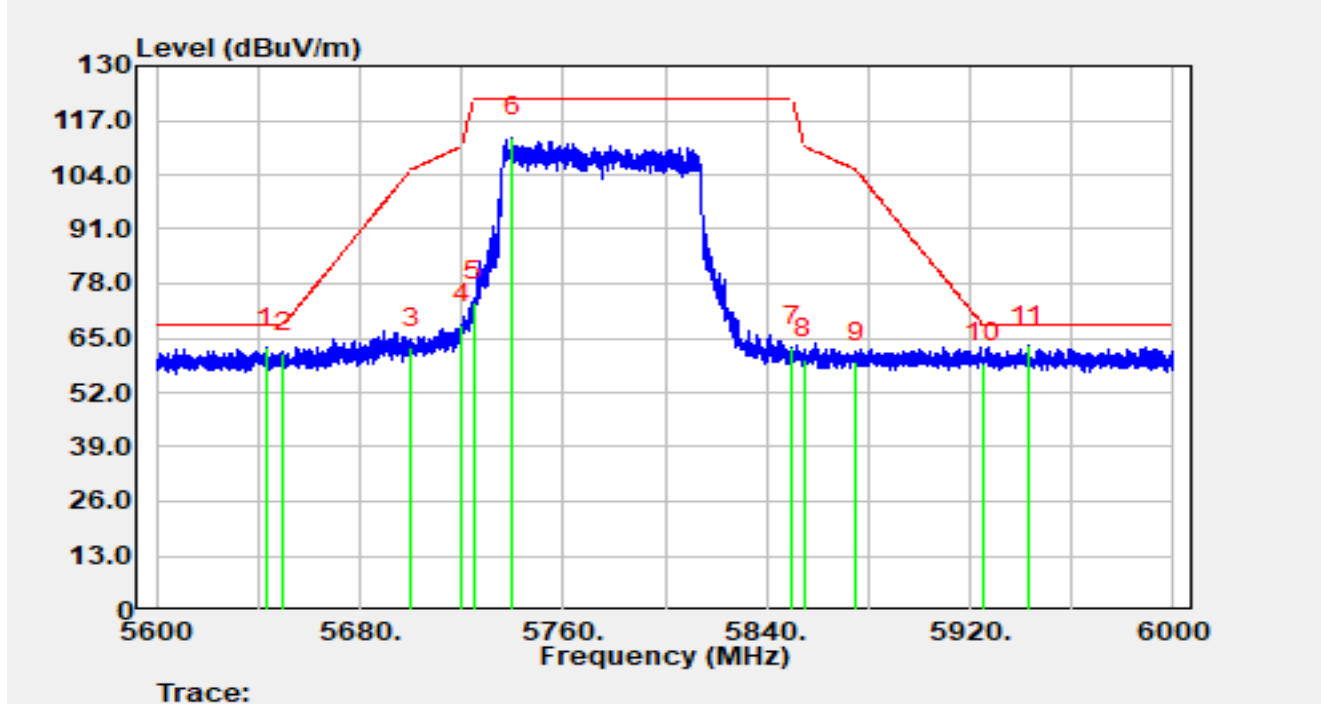


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5643.20	45.86	16.77	62.62	-5.58	68.20	Peak
2		5650.00	44.62	16.79	61.41	-6.79	68.20	Peak
3		5700.00	45.57	17.03	62.60	-42.60	105.20	Peak
4		5720.00	51.43	16.98	68.42	-42.38	110.80	Peak
5		5725.00	56.80	16.98	73.77	-48.43	122.20	Peak
6		5739.92	95.95	16.96	112.91	N/A	N/A	Peak
7		5850.00	45.39	17.56	62.95	-59.25	122.20	Peak
8		5855.00	42.53	17.52	60.05	-50.75	110.80	Peak
9		5875.00	41.73	17.61	59.33	-45.87	105.20	Peak
10		5925.00	41.41	17.49	58.90	-9.30	68.20	Peak
11	*	5942.96	45.46	17.62	63.08	-5.12	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-08-04
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE80 at 5775 MHz		

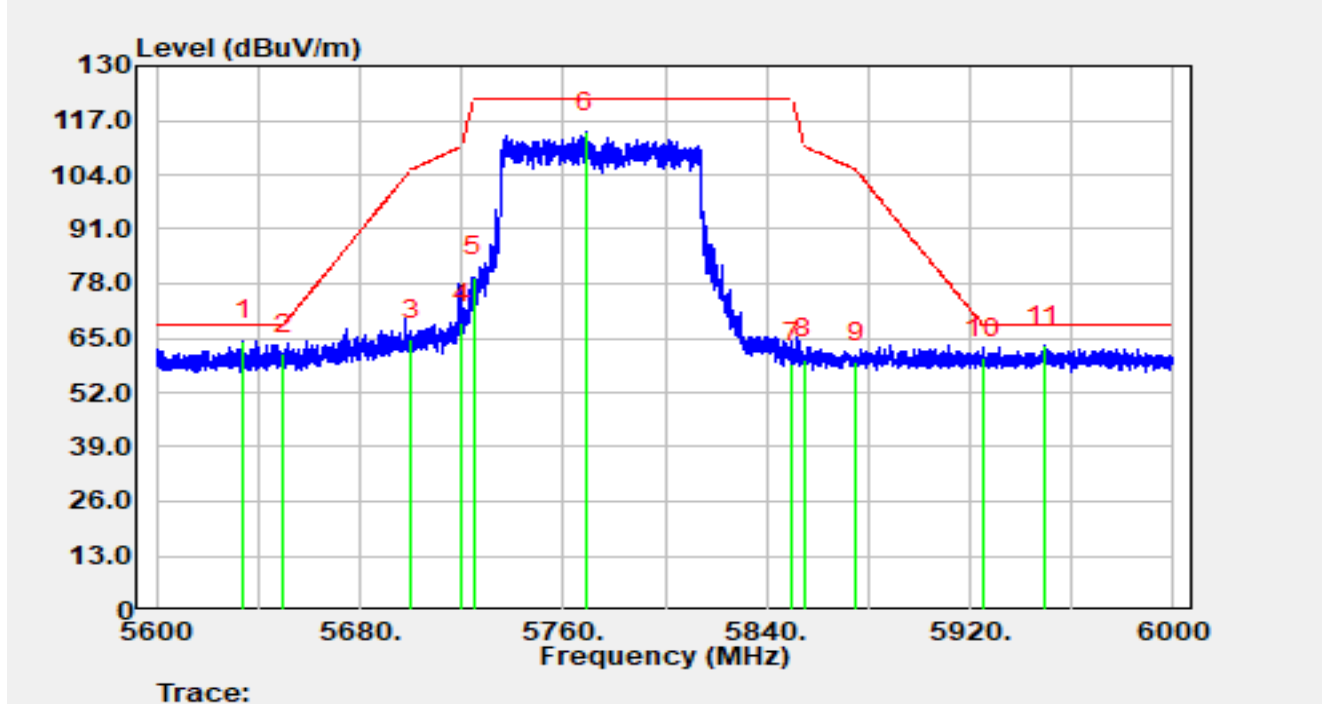


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5634.00	47.62	16.68	64.29	-3.91	68.20	Peak
2		5650.00	44.29	16.79	61.08	-7.12	68.20	Peak
3		5700.00	47.68	17.03	64.72	-40.48	105.20	Peak
4		5720.00	51.50	16.98	68.48	-42.32	110.80	Peak
5		5725.00	62.61	16.98	79.58	-42.62	122.20	Peak
6		5768.72	96.91	17.18	114.08	N/A	N/A	Peak
7		5850.00	41.33	17.56	58.90	-63.30	122.20	Peak
8		5855.00	42.34	17.52	59.86	-50.94	110.80	Peak
9		5875.00	41.64	17.61	59.25	-45.95	105.20	Peak
10		5925.00	42.61	17.49	60.10	-8.10	68.20	Peak
11		5949.12	45.40	17.65	63.05	-5.15	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 5250 MHz		

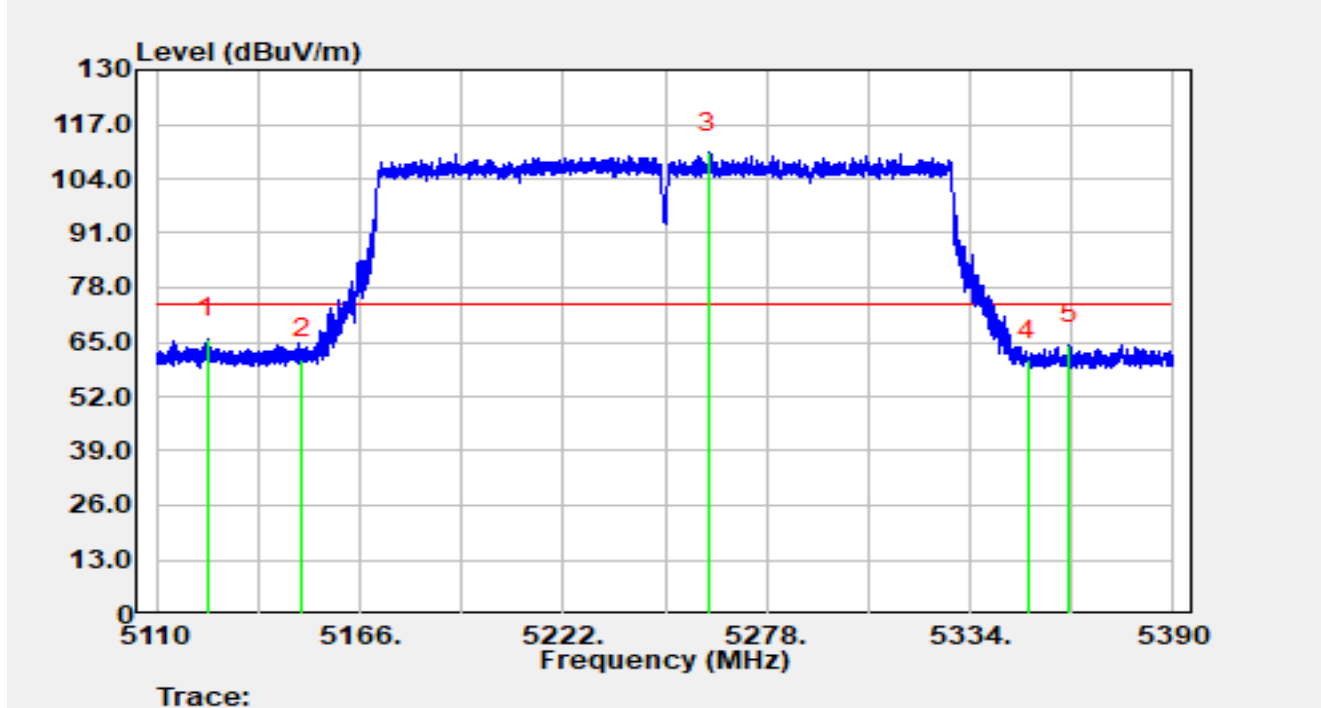


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5123.94	49.82	16.05	65.87	-8.13	74.00	Peak
2		5150.00	45.05	15.99	61.04	-12.96	74.00	Peak
3		5262.10	94.31	15.89	110.20	N/A	N/A	Peak
4		5350.00	45.09	15.72	60.82	-13.18	74.00	Peak
5		5361.44	48.64	15.83	64.46	-9.54	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 5250 MHz		

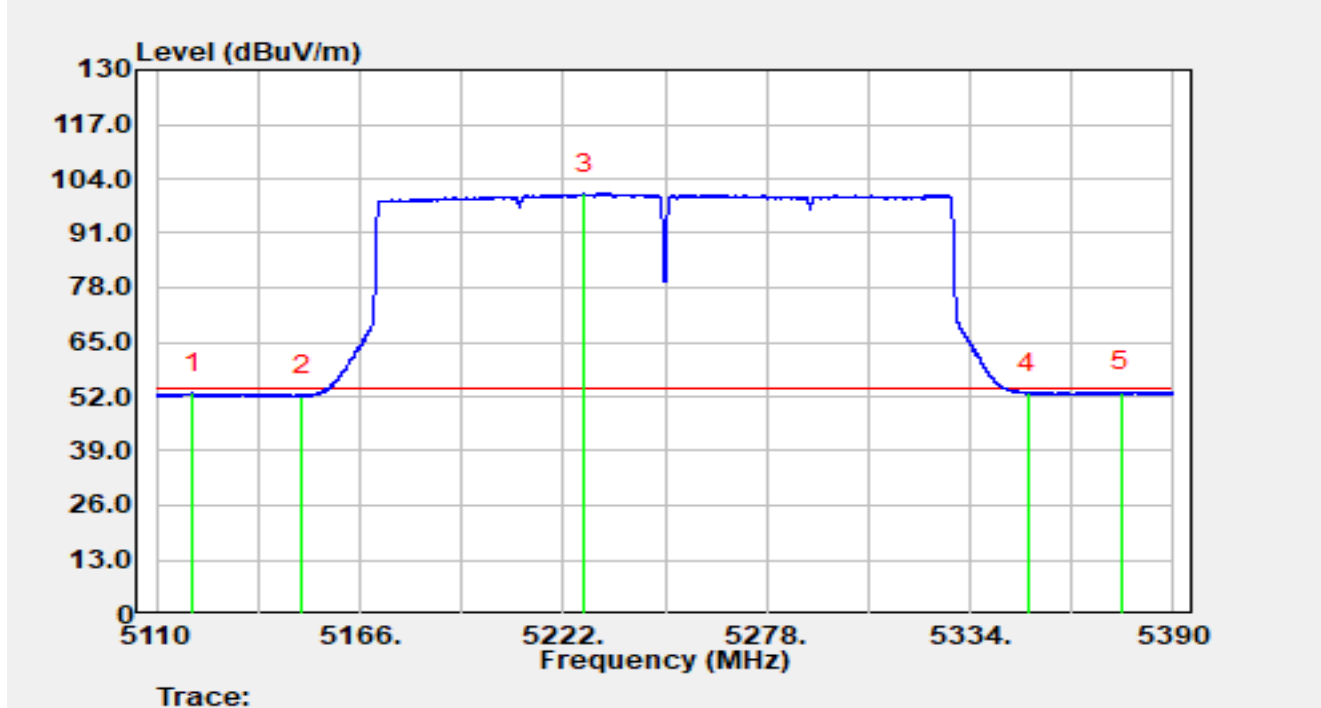


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5119.83	36.73	16.06	52.79	-1.21	54.00	Average
2		5150.00	36.22	15.99	52.21	-1.79	54.00	Average
3		5227.80	84.20	16.26	100.47	N/A	N/A	Average
4		5350.00	37.16	15.72	52.89	-1.11	54.00	Average
5	*	5375.52	37.24	15.94	53.18	-0.82	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 5250 MHz		

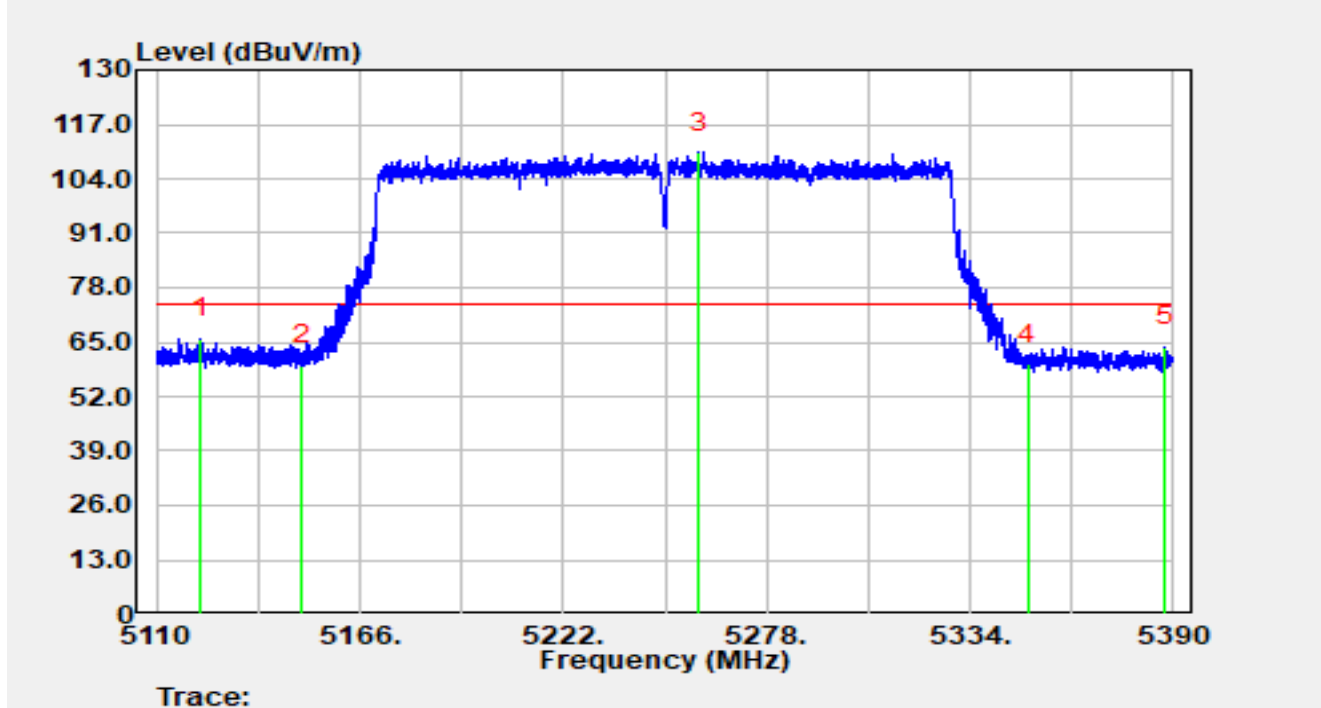


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5122.29	49.79	16.05	65.84	-8.16	74.00	Peak
2		5150.00	43.58	15.99	59.57	-14.43	74.00	Peak
3		5259.21	94.31	15.90	110.21	N/A	N/A	Peak
4		5350.00	44.11	15.72	59.83	-14.17	74.00	Peak
5		5387.54	48.02	15.93	63.95	-10.05	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 5250 MHz		

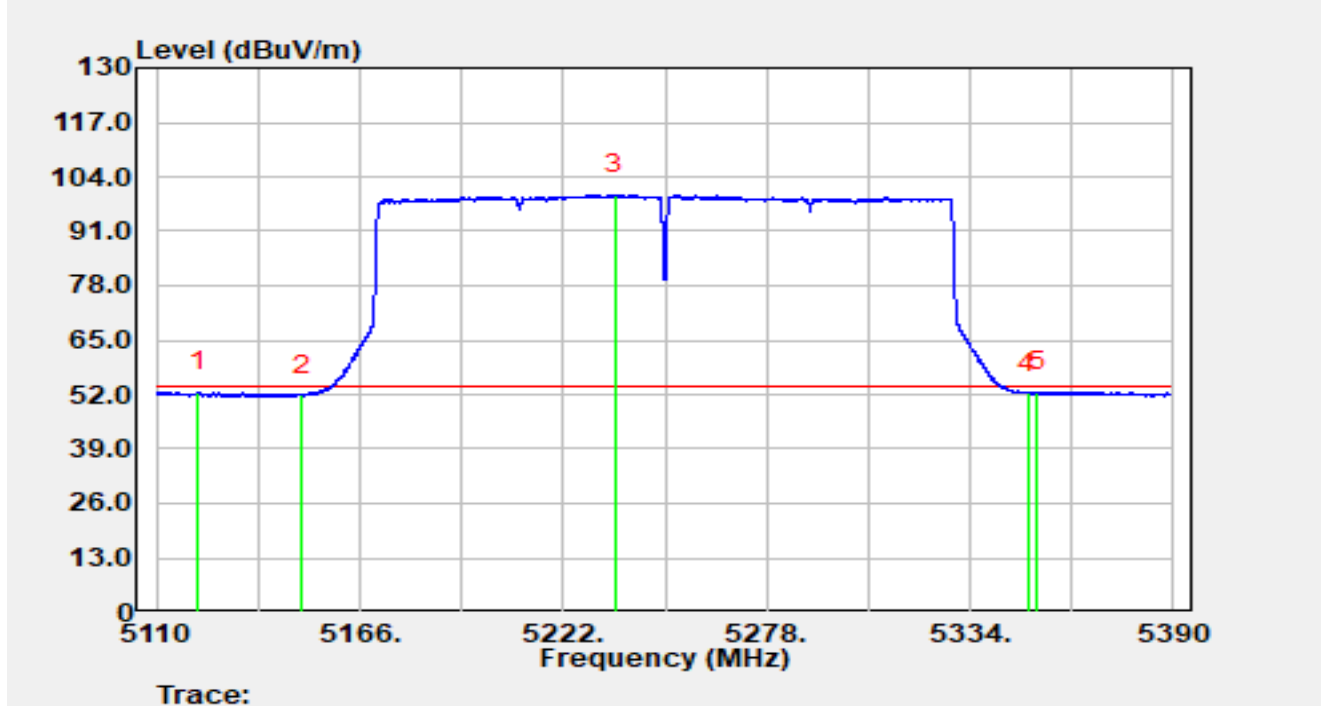


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5121.42	36.52	16.06	52.58	-1.42	54.00	Average
2		5150.00	35.96	15.99	51.95	-2.05	54.00	Average
3		5236.11	83.51	16.17	99.68	N/A	N/A	Average
4		5350.00	36.53	15.72	52.25	-1.75	54.00	Average
5	*	5352.37	36.94	15.75	52.68	-1.32	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-08-04
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 5570 MHz		

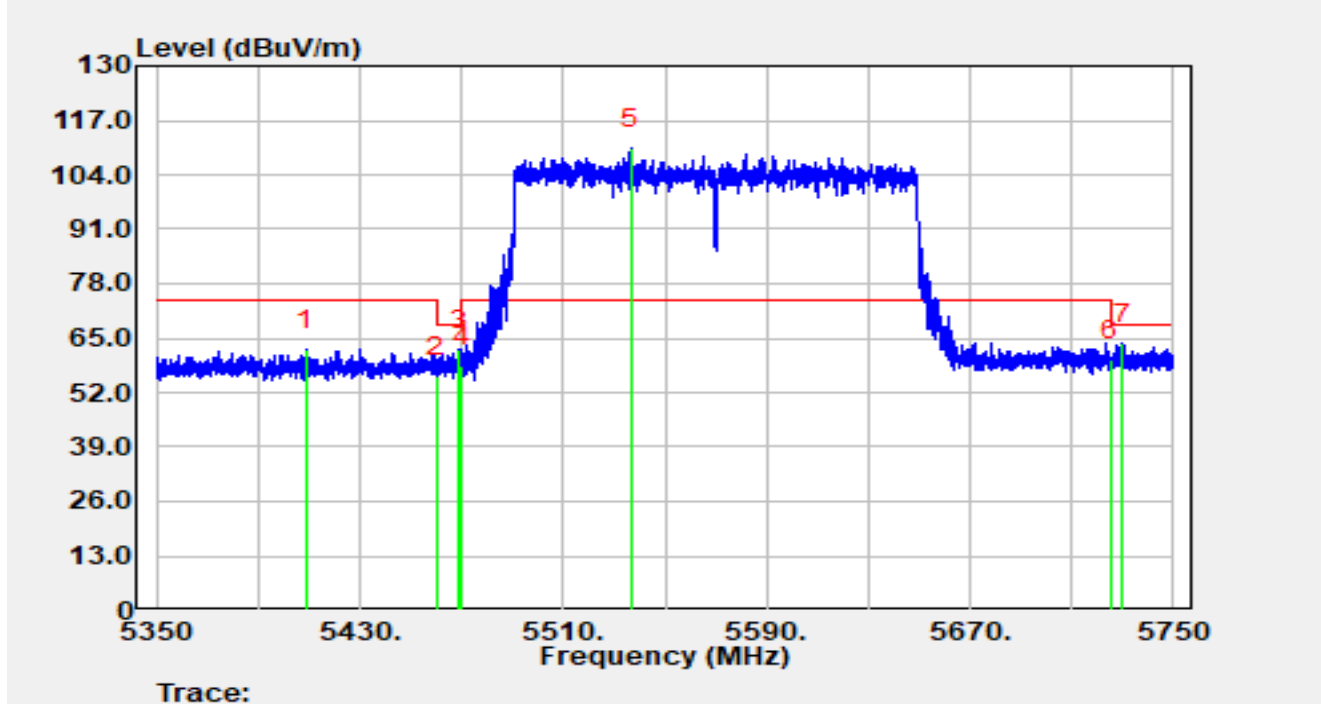


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5408.68	46.47	15.74	62.21	-11.79	74.00	Peak
2		5460.00	39.76	16.00	55.76	-12.44	68.20	Peak
3		5469.28	46.25	15.96	62.21	-5.99	68.20	Peak
4		5470.00	42.27	15.97	58.23	-9.97	68.20	Peak
5		5536.44	93.82	16.55	110.37	N/A	N/A	Peak
6		5725.00	42.84	16.98	59.82	-8.38	68.20	Peak
7	*	5730.16	46.61	16.97	63.58	-4.62	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-08-04
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 5570 MHz		

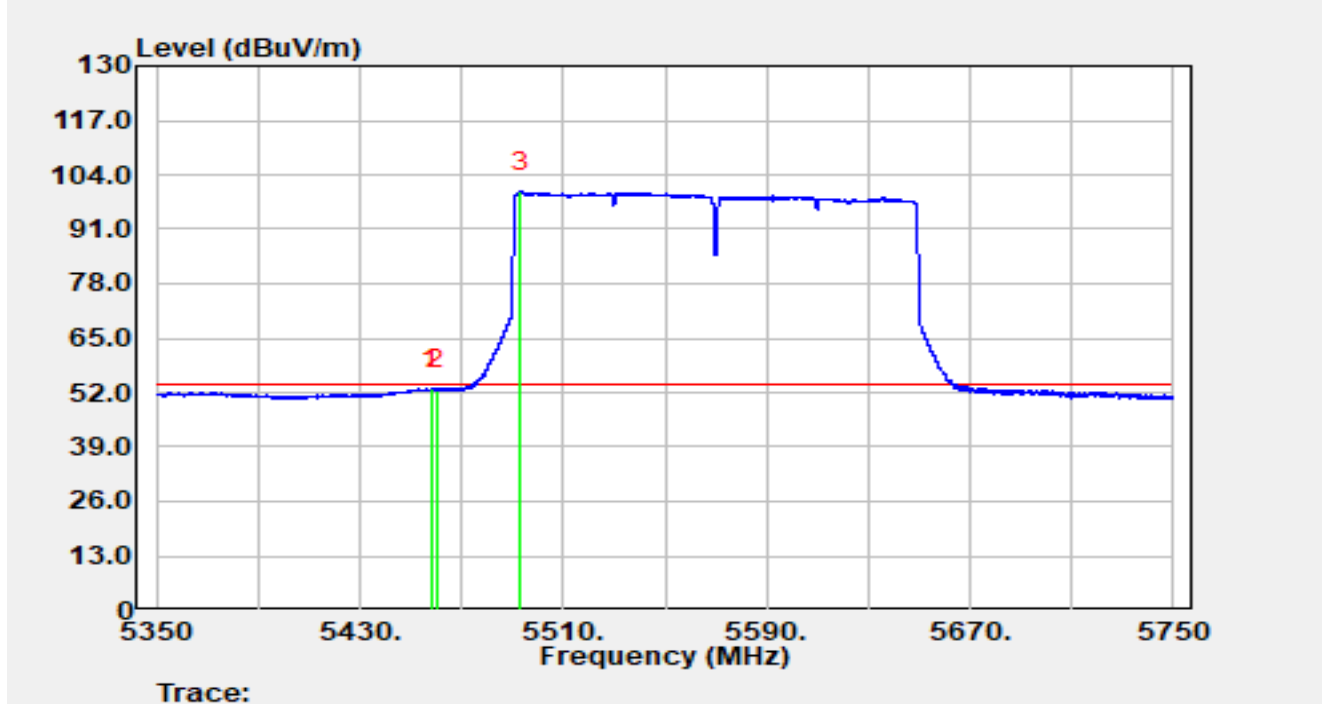


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.16	36.85	16.01	52.86	-1.14	54.00	Average
2		5460.00	36.72	16.00	52.72	-1.28	54.00	Average
3		5493.32	83.64	16.23	99.87	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-08-04
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 5570 MHz		

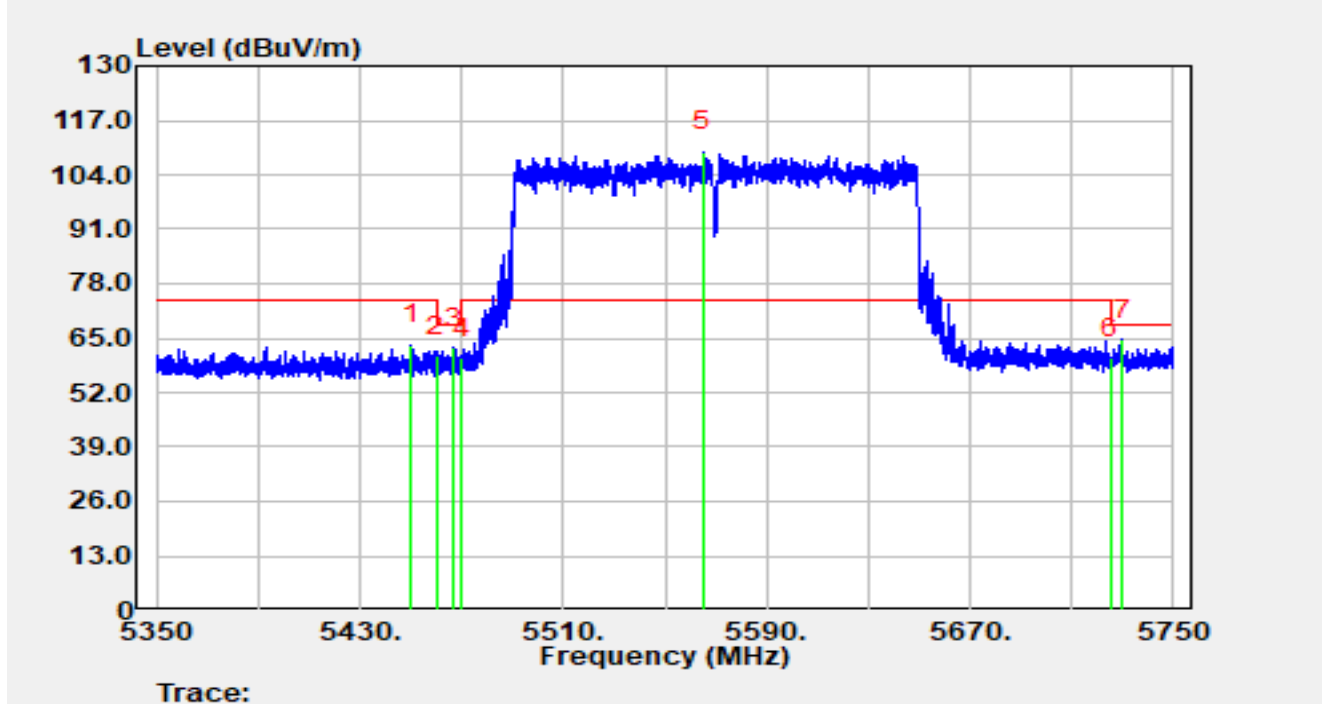


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5450.40	47.44	16.01	63.45	-10.55	74.00	Peak
2		5460.00	44.72	16.00	60.72	-7.48	68.20	Peak
3		5467.16	46.77	15.96	62.73	-5.47	68.20	Peak
4		5470.00	44.21	15.97	60.17	-8.03	68.20	Peak
5		5565.12	93.00	16.48	109.48	N/A	N/A	Peak
6		5725.00	43.17	16.98	60.14	-8.06	68.20	Peak
7	*	5729.84	47.77	16.97	64.74	-3.46	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-08-04
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11ax-HE160 at 5570 MHz		

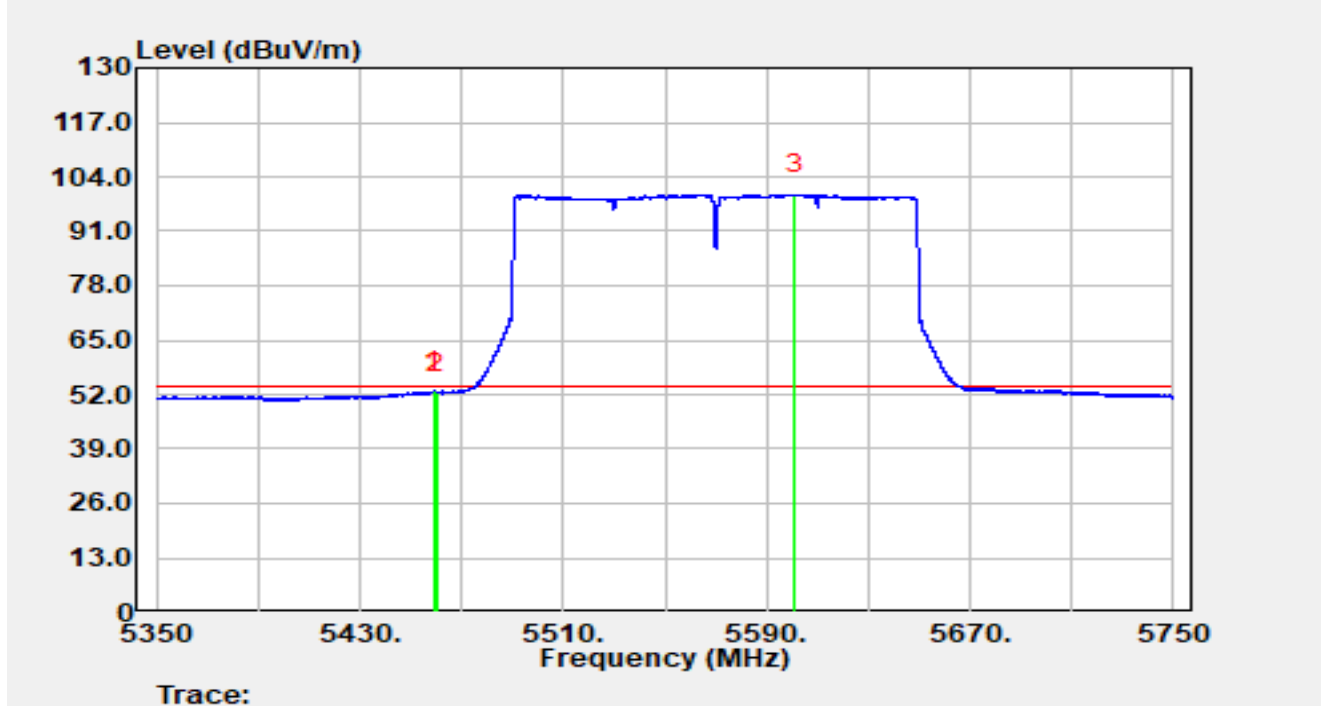


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.84	36.79	16.01	52.80	-1.20	54.00	Average
2		5460.00	36.45	16.00	52.45	-1.55	54.00	Average
3		5601.04	83.21	16.59	99.80	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

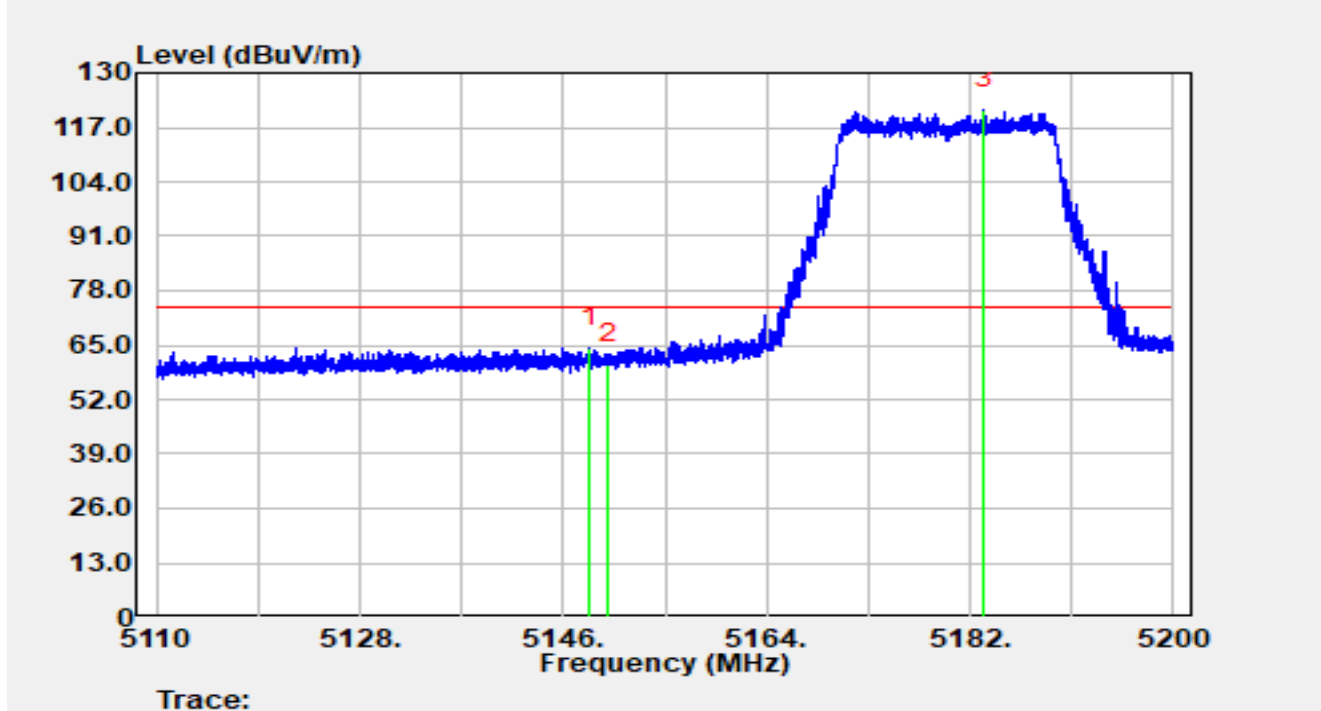


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.29	48.47	15.99	64.46	-9.54	74.00	Peak
2		5150.00	44.39	15.99	60.39	-13.61	74.00	Peak
3		5183.24	105.18	16.01	121.19	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

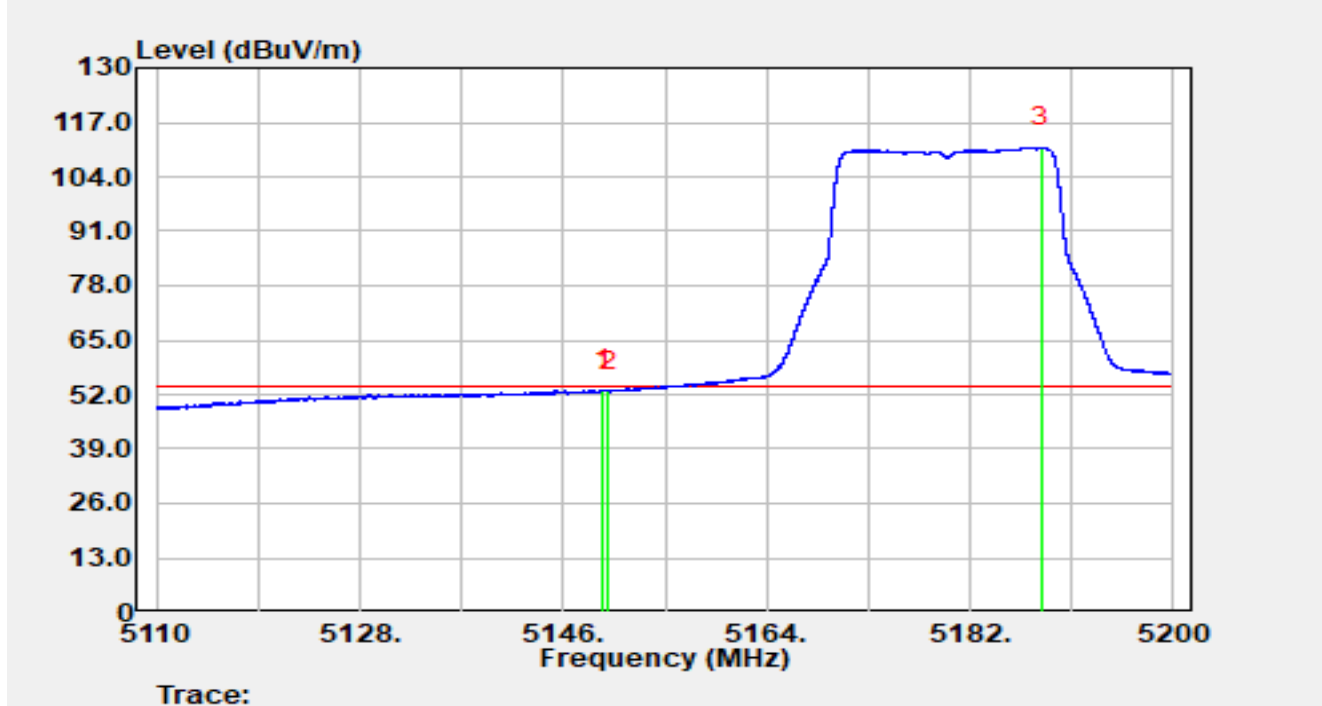


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.47	37.06	15.99	53.05	-0.95	54.00	Average
2		5150.00	36.82	15.99	52.81	-1.19	54.00	Average
3		5188.27	95.05	16.00	111.05	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

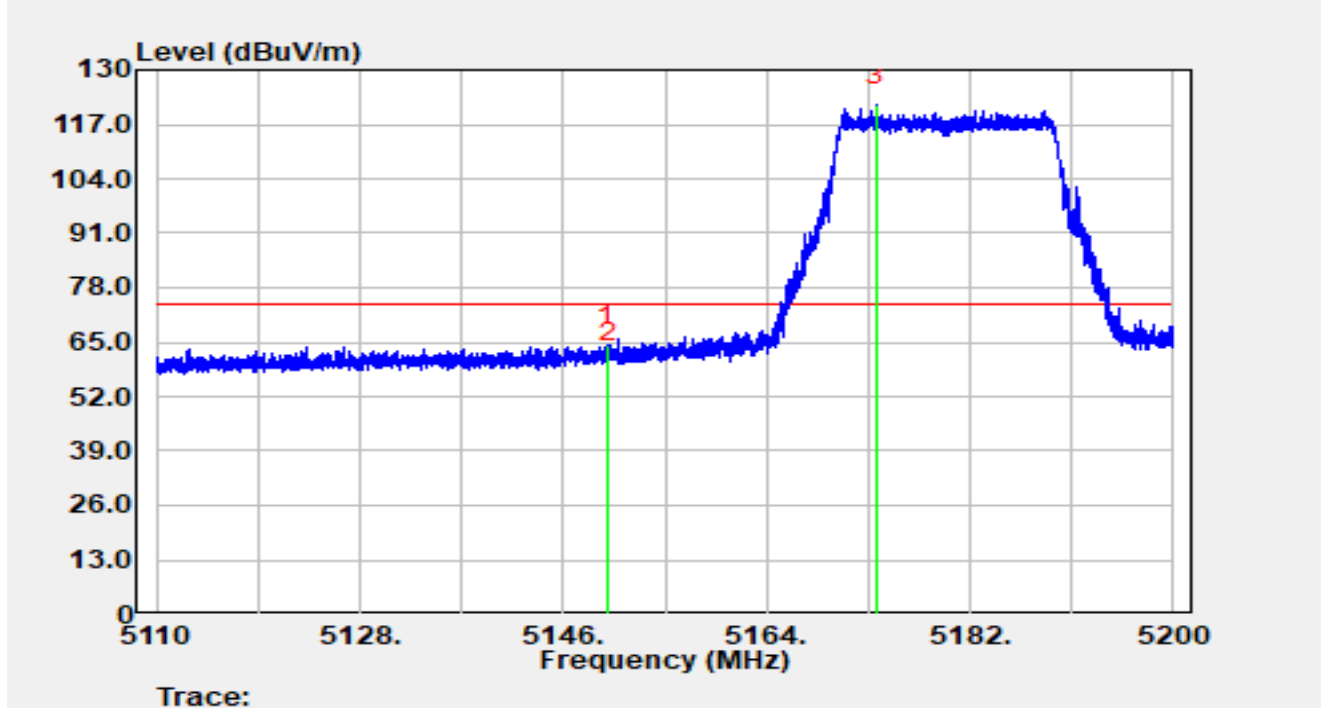


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.85	48.11	15.99	64.10	-9.90	74.00	Peak
2		5150.00	44.35	15.99	60.34	-13.66	74.00	Peak
3		5173.68	105.55	16.02	121.57	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

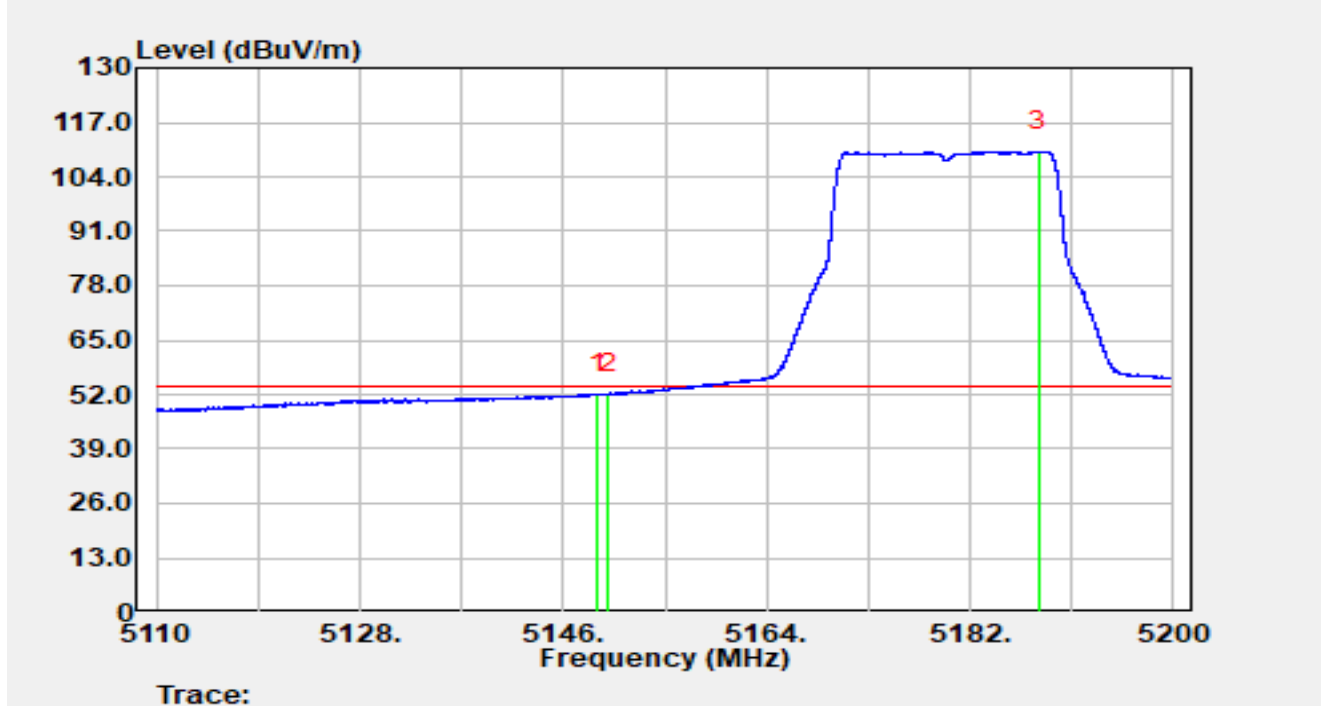


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.11	36.10	15.99	52.09	-1.91	54.00	Average
2		5150.00	36.05	15.99	52.04	-1.96	54.00	Average
3		5188.11	93.99	16.00	109.99	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

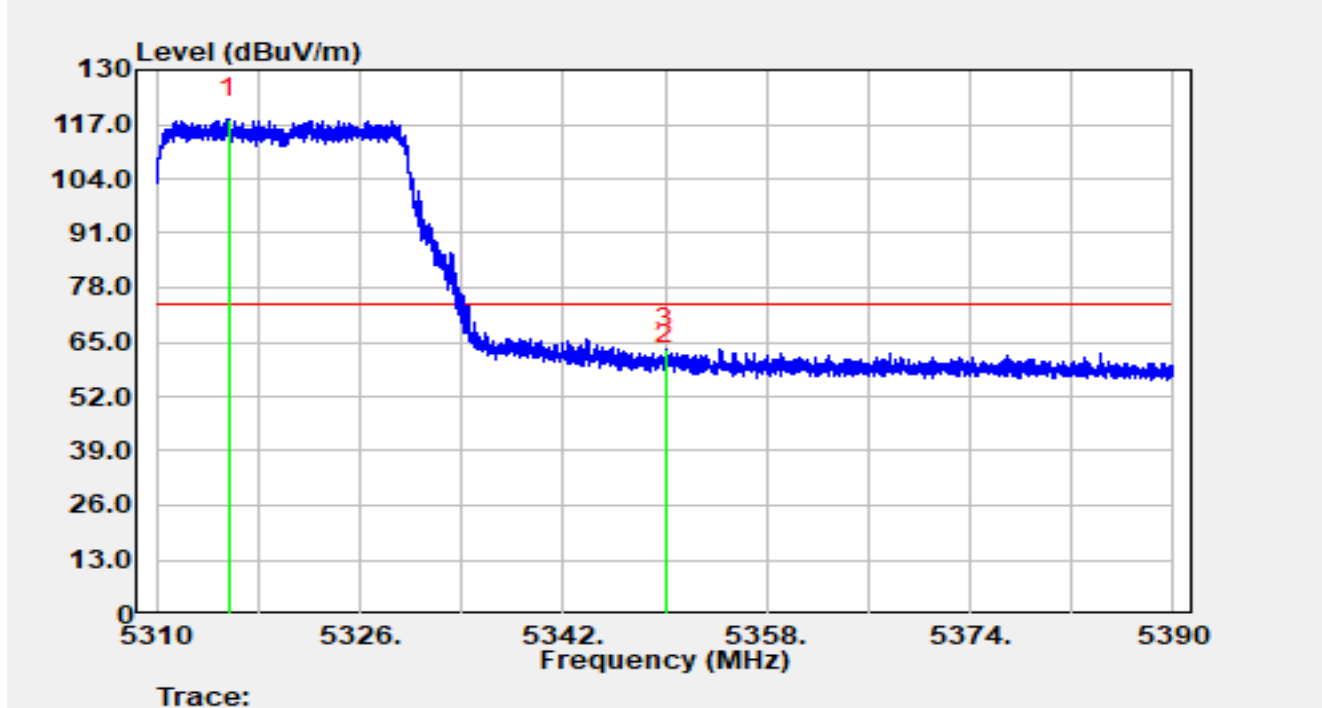


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5315.63	102.55	15.81	118.35	N/A	N/A	Peak
2		5350.00	43.88	15.72	59.60	-14.40	74.00	Peak
3	*	5350.06	47.76	15.72	63.49	-10.51	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

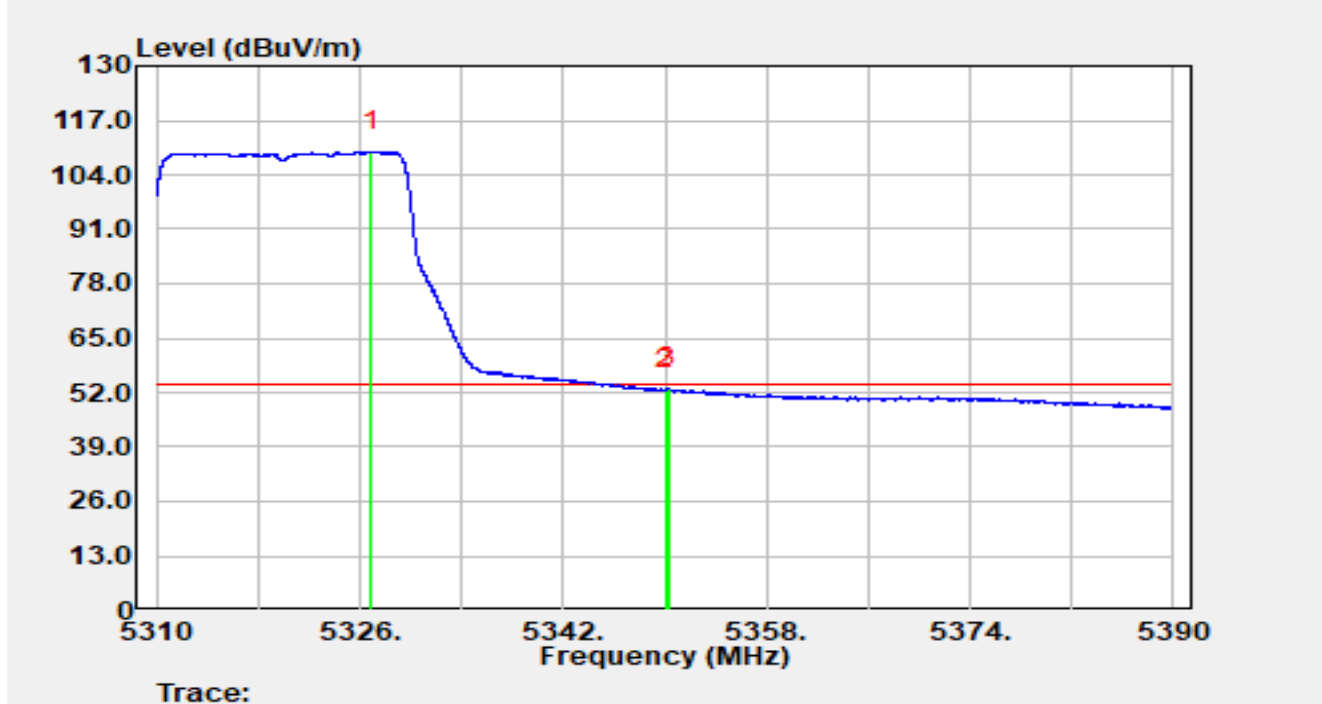


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5326.94	93.74	15.85	109.59	N/A	N/A	Average
2		5350.00	36.86	15.72	52.58	-1.42	54.00	Average
3	*	5350.29	37.25	15.73	52.98	-1.02	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

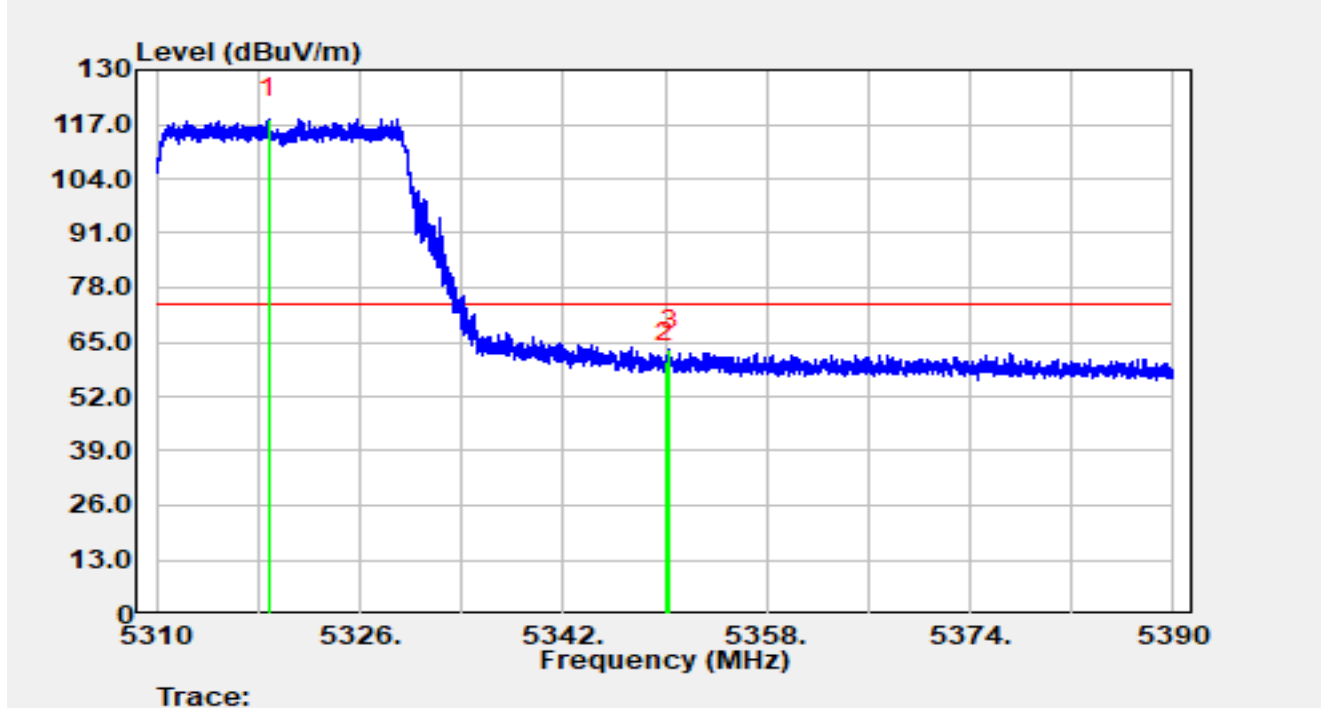


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5318.79	102.45	15.82	118.27	N/A	N/A	Peak
2		5350.00	44.53	15.72	60.26	-13.74	74.00	Peak
3	*	5350.38	47.55	15.73	63.27	-10.73	74.00	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

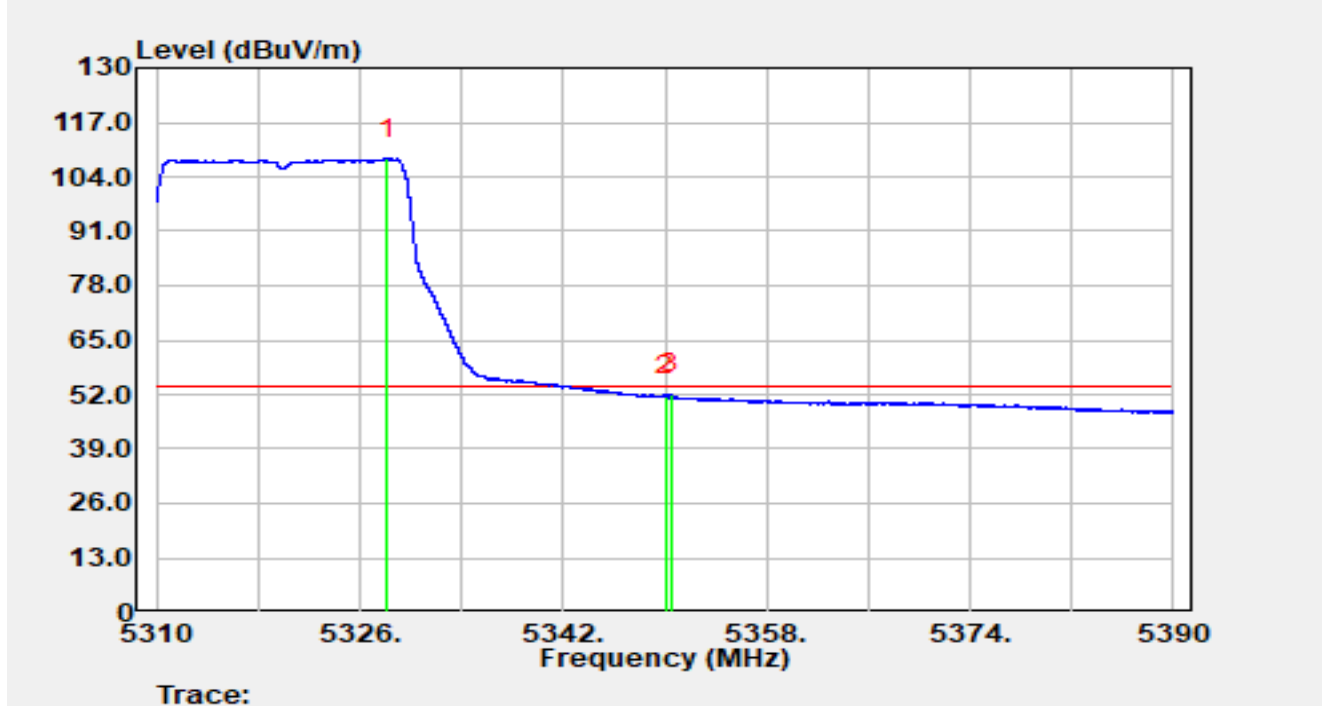


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5328.14	92.51	15.85	108.36	N/A	N/A	Average
2		5350.00	35.92	15.72	51.64	-2.36	54.00	Average
3	*	5350.52	36.28	15.73	52.01	-1.99	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

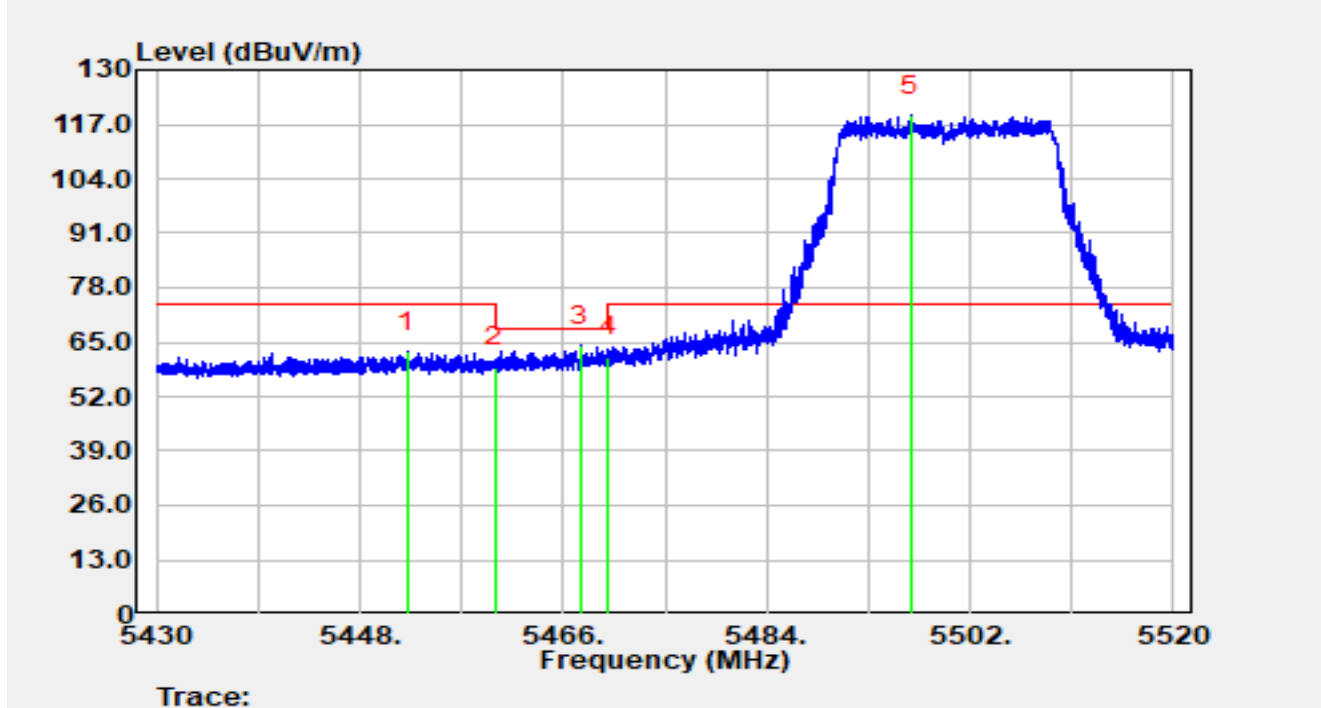


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5452.16	46.56	16.03	62.59	-11.41	74.00	Peak
2		5460.00	42.91	16.00	58.91	-9.29	68.20	Peak
3	*	5467.54	48.15	15.95	64.10	-4.10	68.20	Peak
4		5470.00	45.43	15.97	61.40	-6.80	68.20	Peak
5		5496.73	102.88	16.26	119.14	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

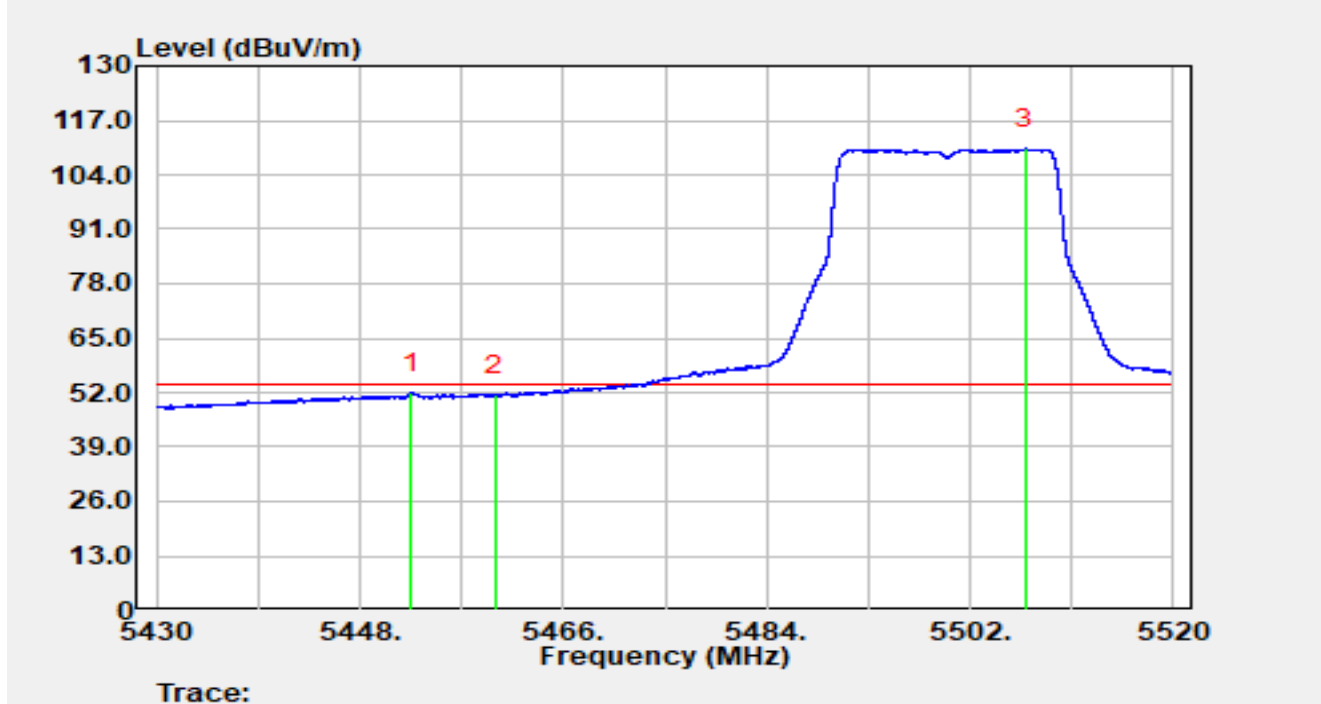


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5452.57	35.75	16.03	51.78	-2.22	54.00	Average
2		5460.00	35.30	16.00	51.30	-2.70	54.00	Average
3		5506.91	93.86	16.30	110.15	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

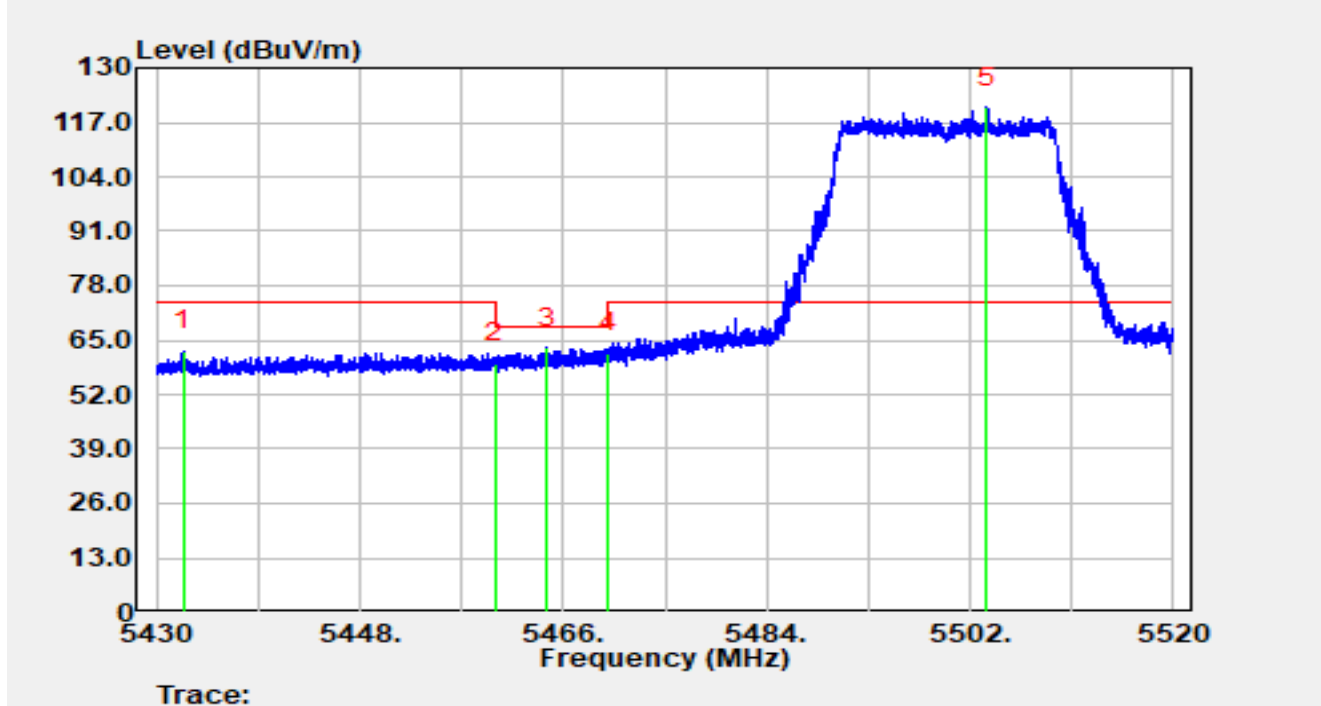


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5432.35	46.77	15.67	62.45	-11.55	74.00	Peak
2		5460.00	43.47	16.00	59.47	-8.73	68.20	Peak
3	*	5464.61	47.30	15.97	63.27	-4.93	68.20	Peak
4		5470.00	45.87	15.97	61.84	-6.36	68.20	Peak
5		5503.51	104.32	16.30	120.62	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

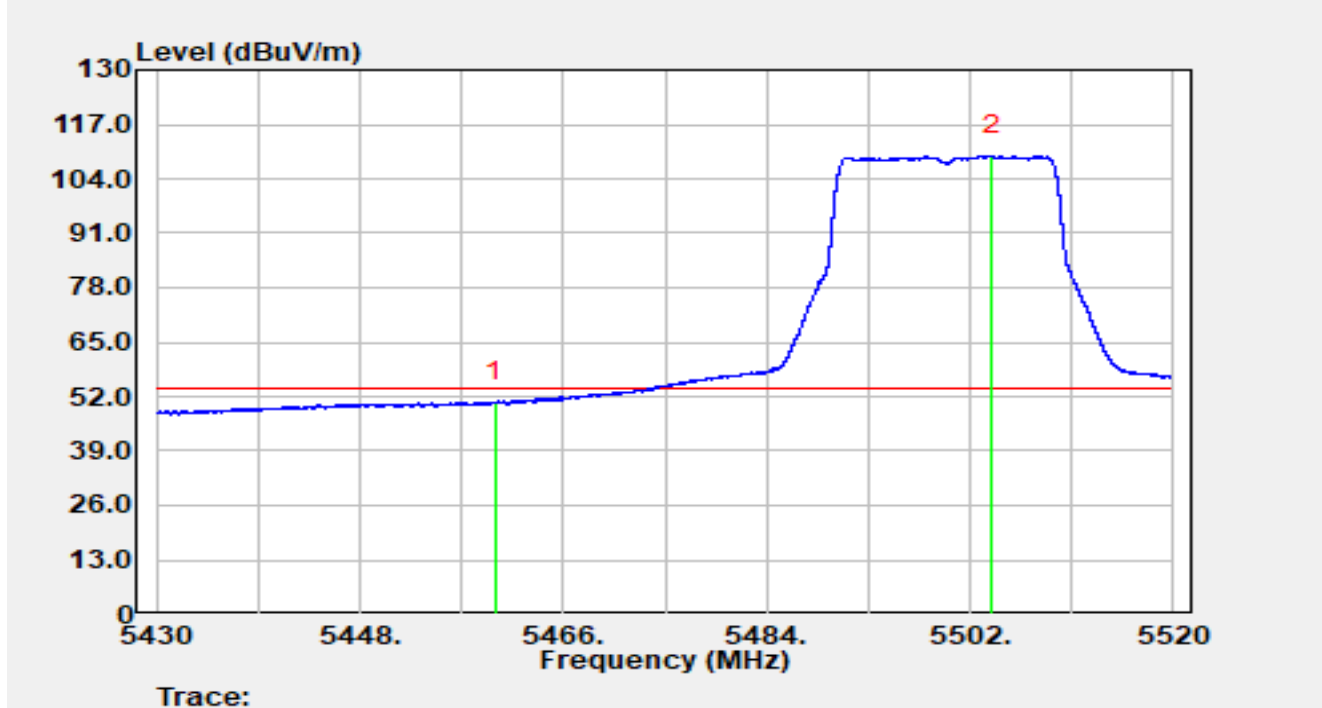


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.00	34.67	16.00	50.67	-3.33	54.00	Average
2		5503.93	93.11	16.30	109.40	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5700 MHz		

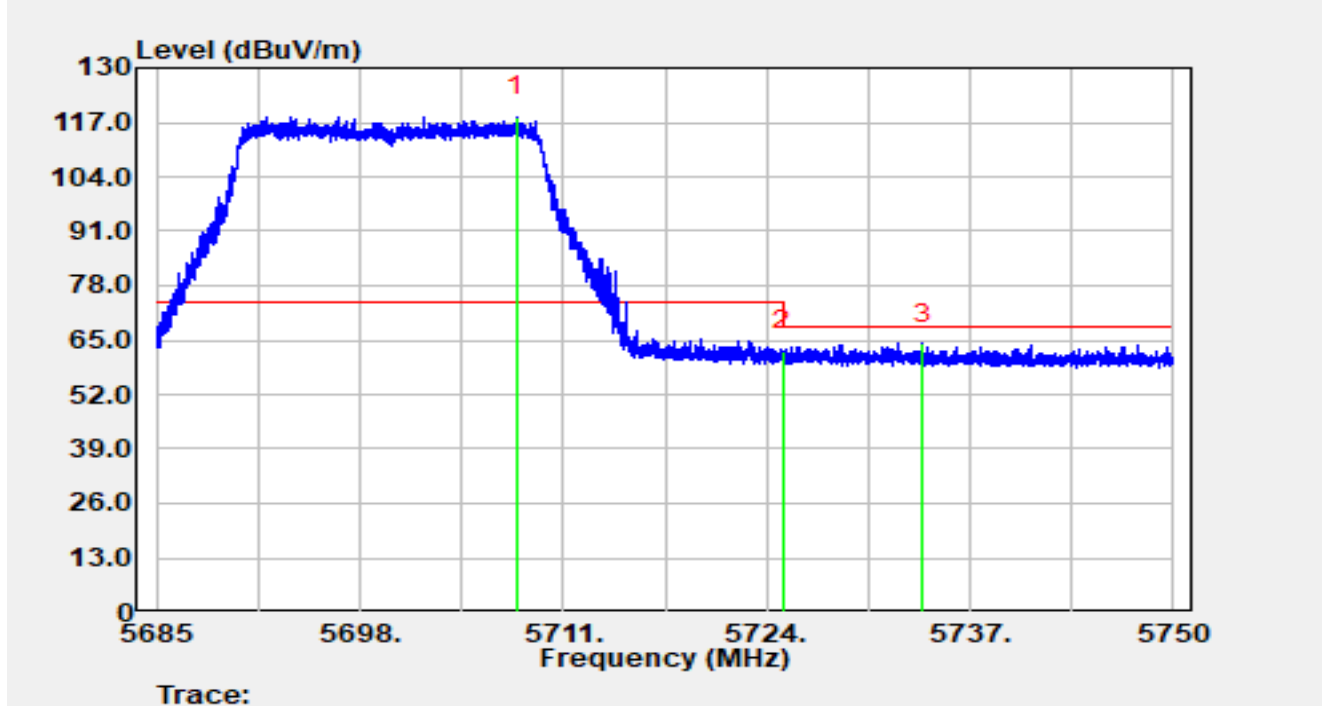


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5707.98	101.27	17.01	118.28	N/A	N/A	Peak
2		5725.00	45.47	16.98	62.44	-5.76	68.20	Peak
3	*	5733.98	47.26	16.96	64.23	-3.97	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5700 MHz		

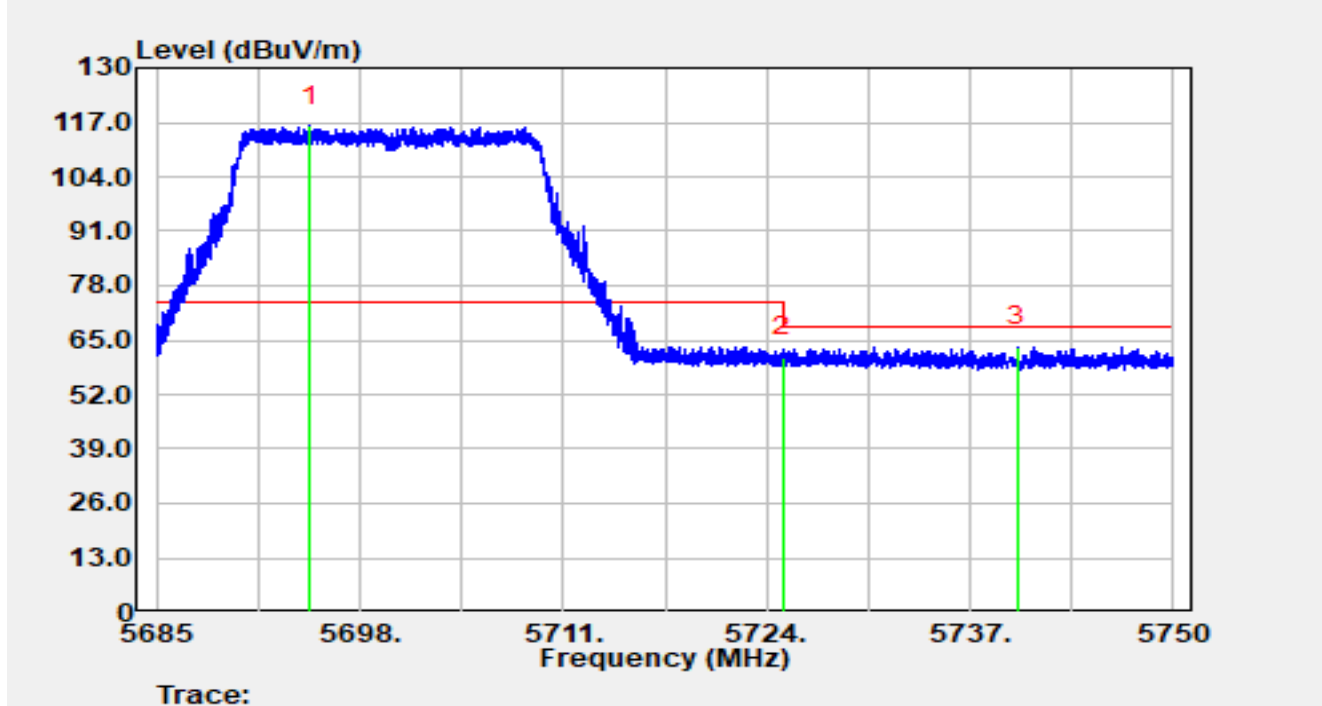


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5694.83	99.10	17.05	116.15	N/A	N/A	Peak
2		5725.00	43.99	16.98	60.96	-7.24	68.20	Peak
3	*	5740.02	46.51	16.96	63.46	-4.74	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5745 MHz		

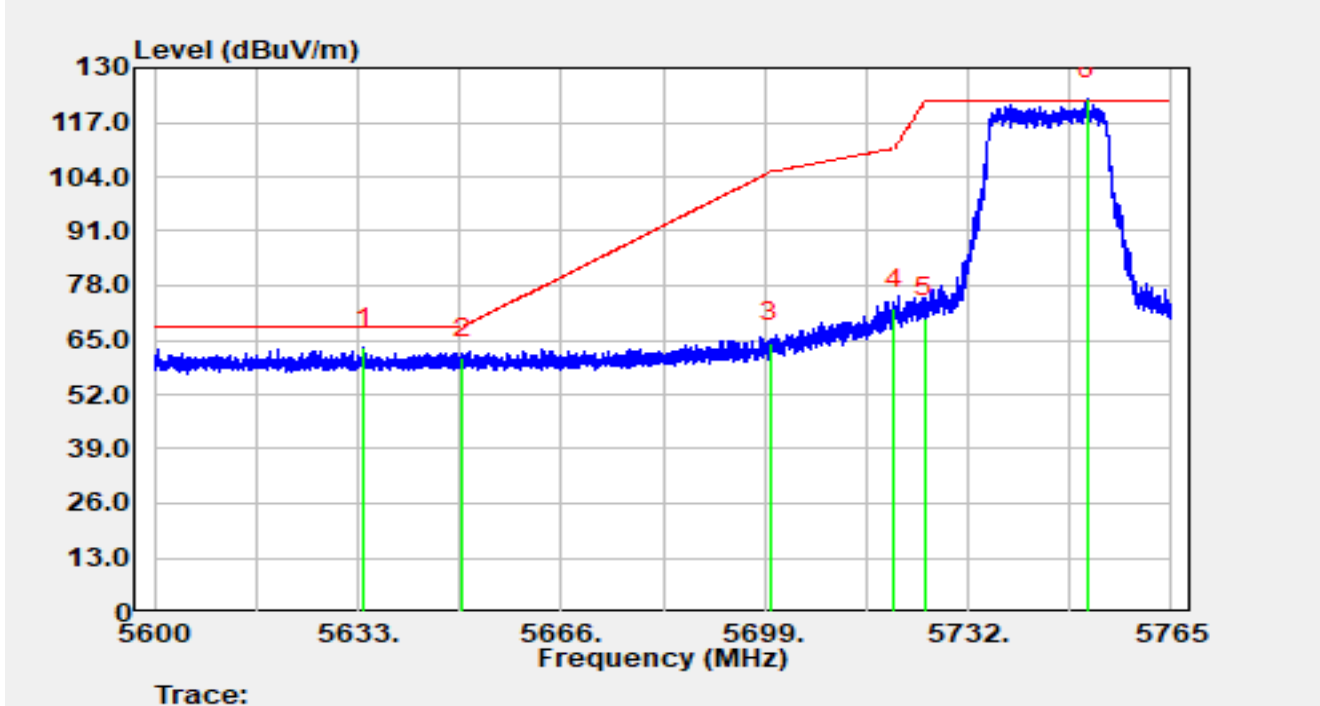


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5633.96	46.47	16.68	63.15	-5.05	68.20	Peak
2		5650.00	43.99	16.79	60.78	-7.42	68.20	Peak
3		5700.00	47.23	17.03	64.27	-40.93	105.20	Peak
4		5720.00	55.48	16.98	72.46	-38.34	110.80	Peak
5		5725.00	53.37	16.98	70.34	-51.86	122.20	Peak
6		5751.27	105.60	17.04	122.63	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5745 MHz		

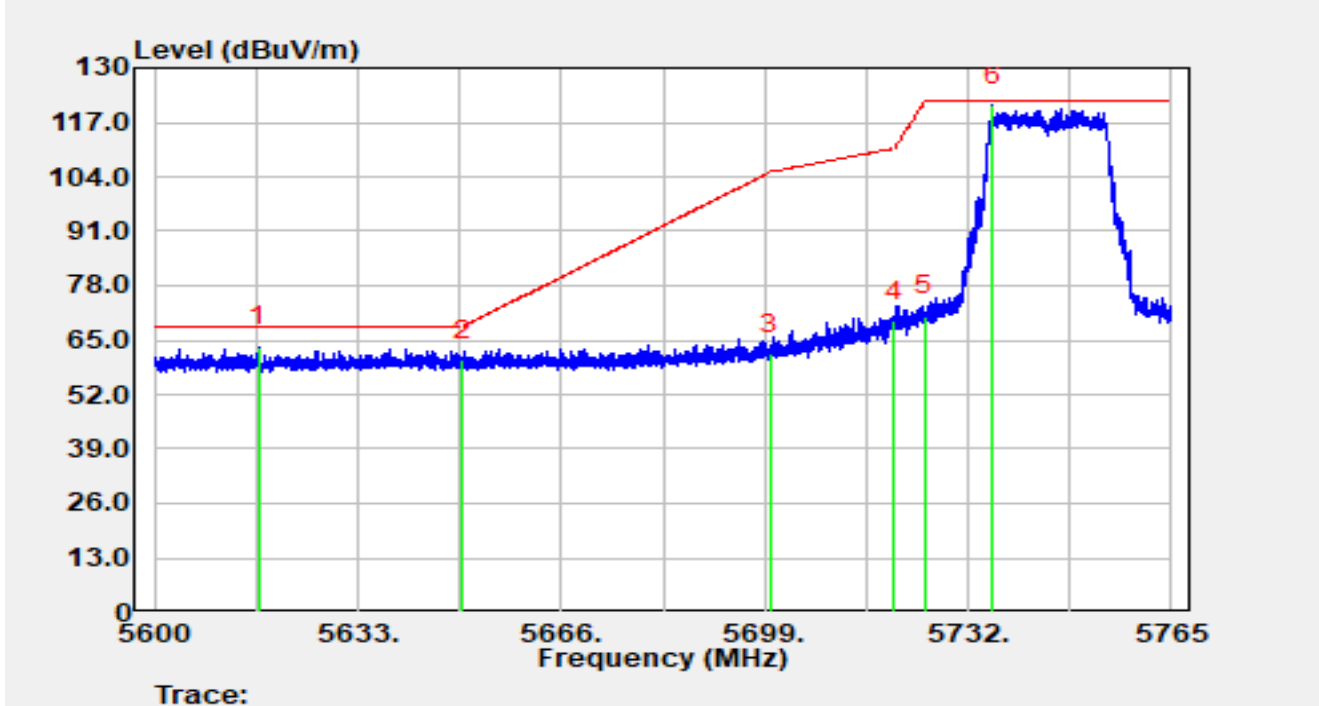


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5616.86	46.91	16.50	63.41	-4.79	68.20	Peak
2		5650.00	43.41	16.79	60.20	-8.00	68.20	Peak
3		5700.00	44.59	17.03	61.62	-43.58	105.20	Peak
4		5720.00	52.57	16.98	69.55	-41.25	110.80	Peak
5		5725.00	53.85	16.98	70.82	-51.38	122.20	Peak
6		5735.96	104.09	16.96	121.05	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5825 MHz		

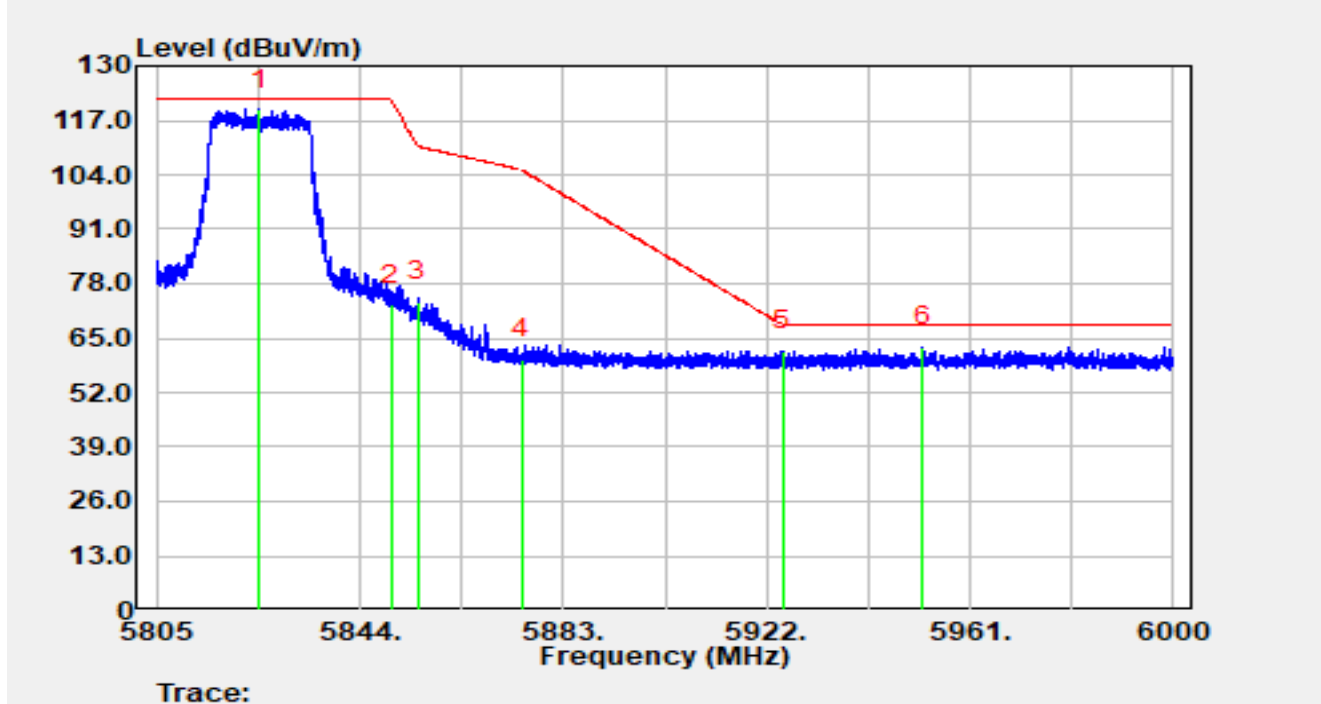


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5824.73	102.22	17.43	119.65	N/A	N/A	Peak
2		5850.00	55.30	17.56	72.87	-49.33	122.20	Peak
3		5855.00	56.10	17.52	73.62	-37.18	110.80	Peak
4		5875.00	42.39	17.61	60.00	-45.20	105.20	Peak
5		5925.00	44.47	17.49	61.96	-6.24	68.20	Peak
6	*	5952.03	45.38	17.65	63.03	-5.17	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT20 at 5825 MHz		

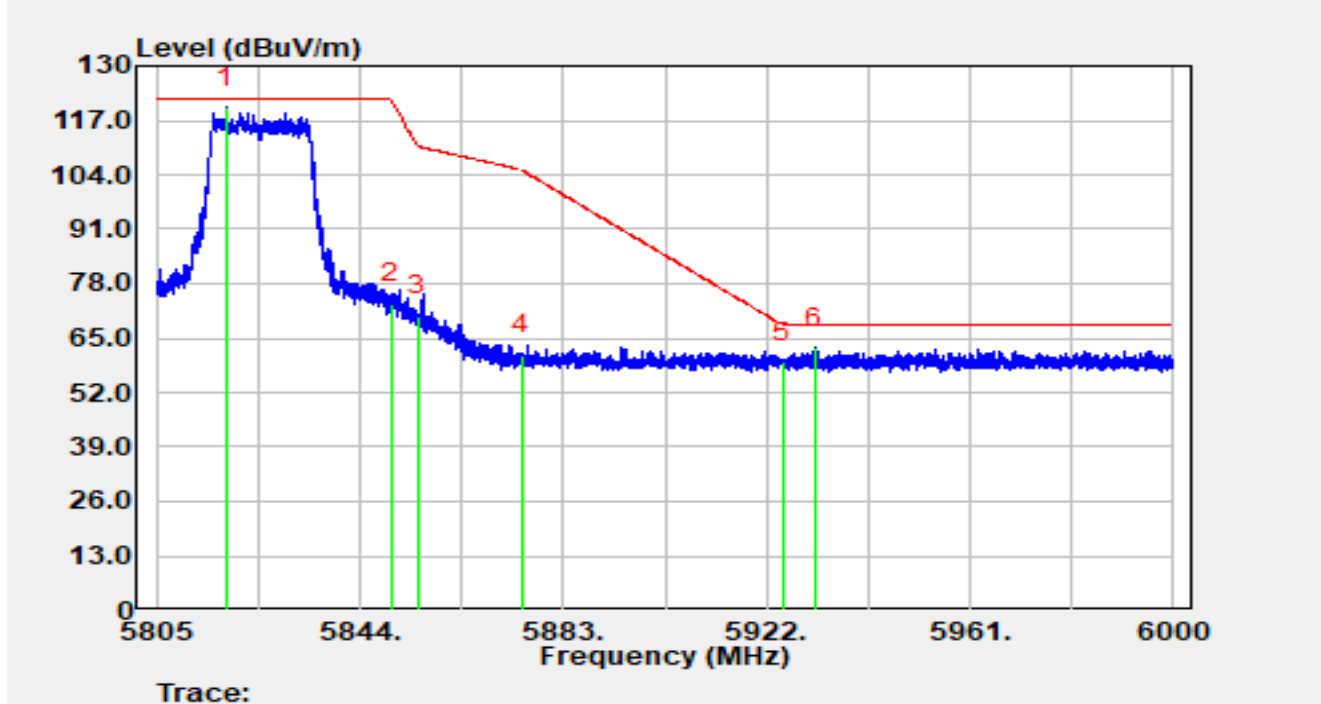


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5818.46	102.53	17.42	119.96	N/A	N/A	Peak
2		5850.00	55.75	17.56	73.31	-48.89	122.20	Peak
3		5855.00	52.67	17.52	70.19	-40.61	110.80	Peak
4		5875.00	43.26	17.61	60.87	-44.33	105.20	Peak
5		5925.00	41.64	17.49	59.13	-9.07	68.20	Peak
6	*	5931.17	45.21	17.50	62.71	-5.49	68.20	Peak

Notes:

- " * " indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5190 MHz		

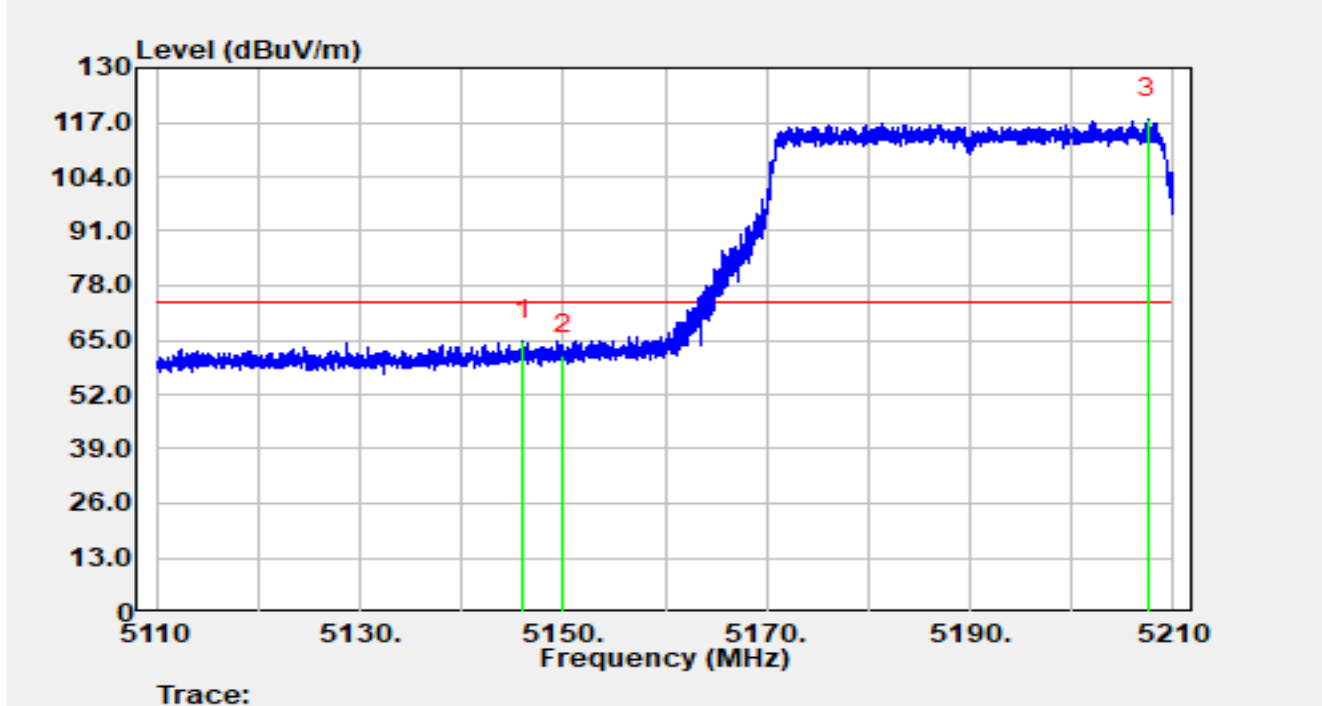


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.05	48.79	15.98	64.77	-9.23	74.00	Peak
2		5150.00	45.52	15.99	61.51	-12.49	74.00	Peak
3		5207.44	101.79	15.96	117.75	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5190 MHz		

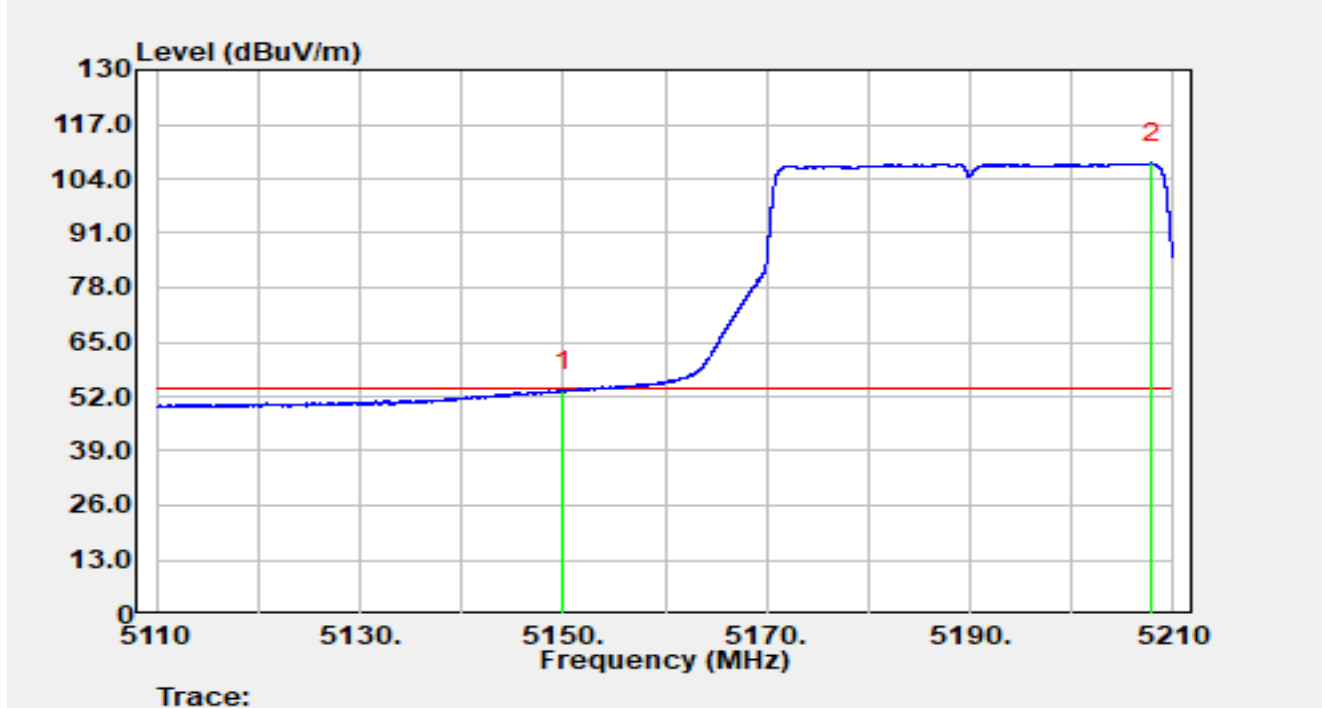


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.00	37.26	15.99	53.25	-0.75	54.00	Average
2		5207.92	91.72	15.96	107.68	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5190 MHz		

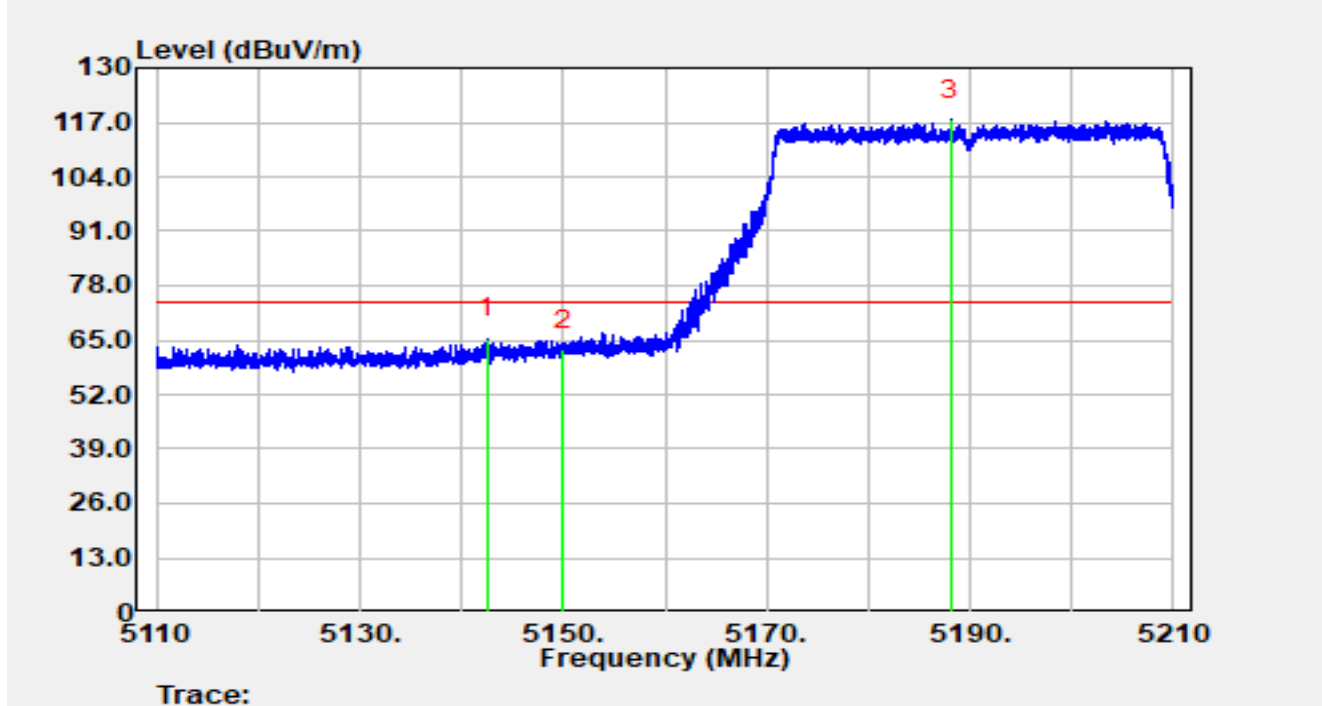


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5142.47	49.30	15.98	65.28	-8.72	74.00	Peak
2		5150.00	46.68	15.99	62.67	-11.33	74.00	Peak
3		5188.15	101.72	16.00	117.72	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5190 MHz		

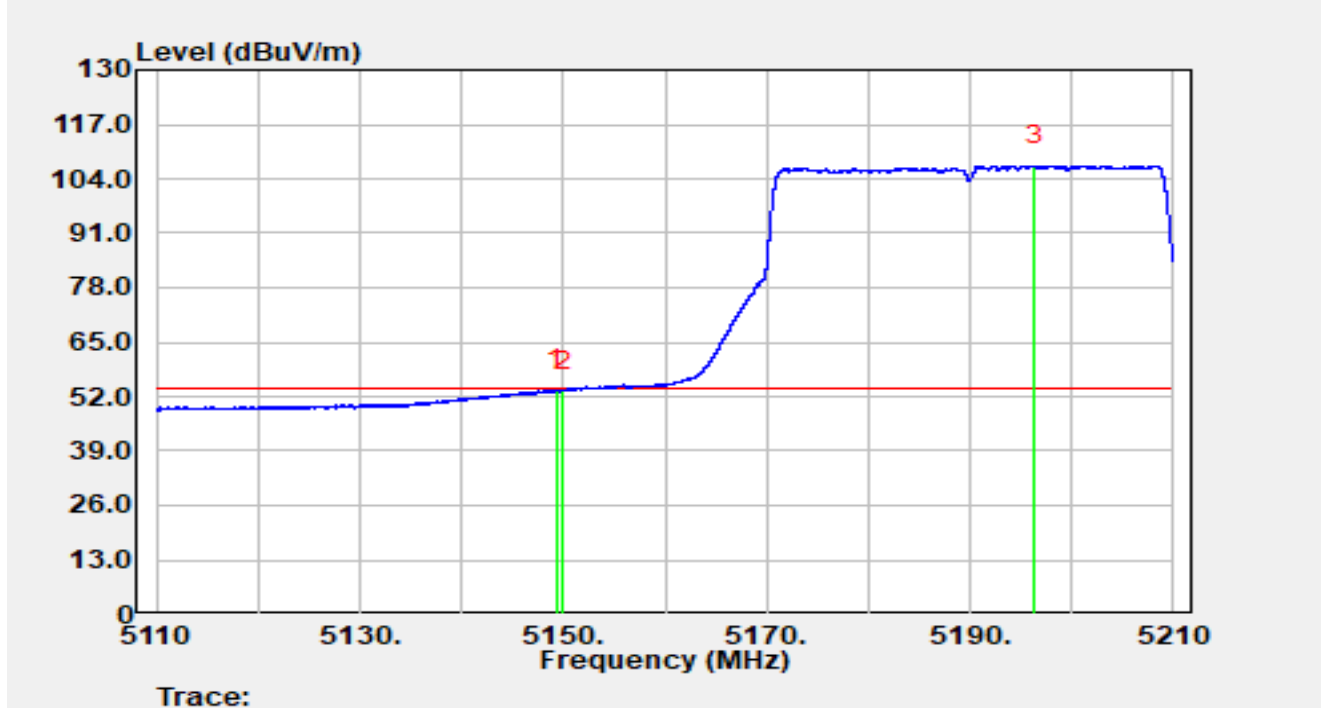


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.32	37.48	15.99	53.47	-0.53	54.00	Average
2		5150.00	37.32	15.99	53.31	-0.69	54.00	Average
3		5196.31	91.15	15.98	107.13	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5310 MHz		

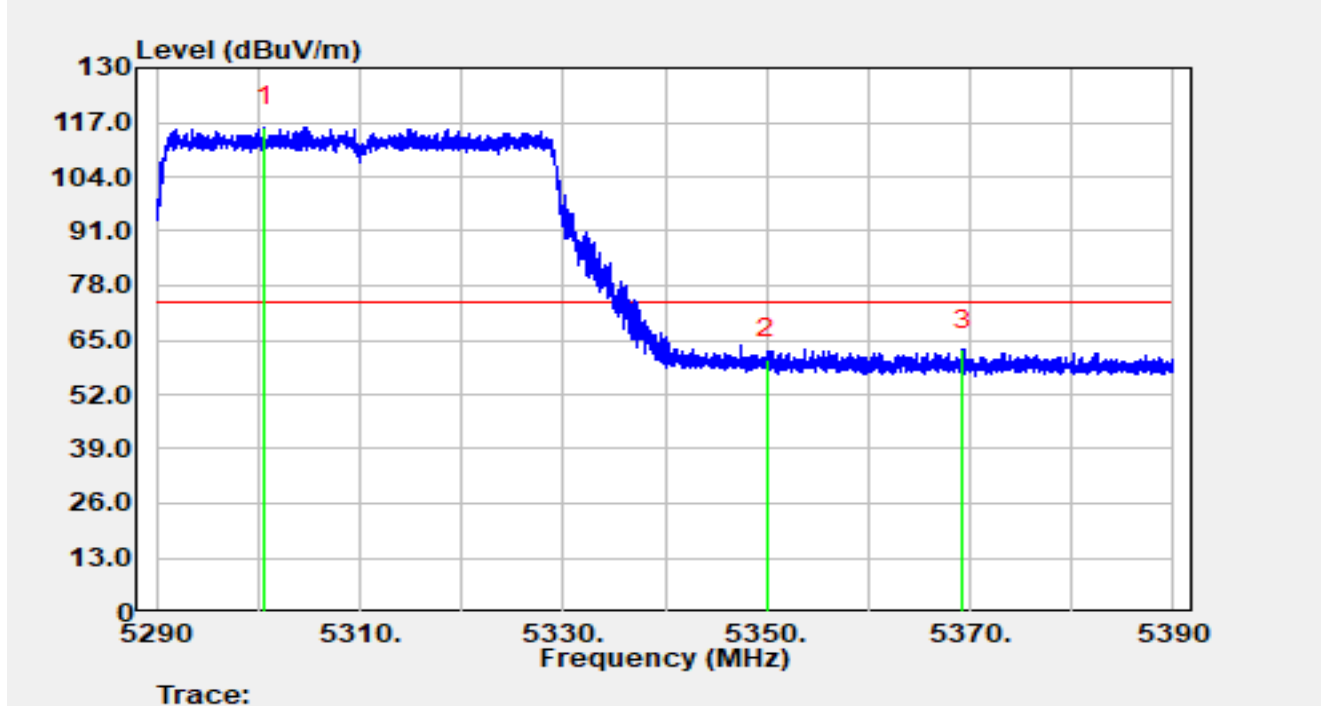


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5300.61	99.95	15.87	115.82	N/A	N/A	Peak
2		5350.00	44.80	15.72	60.52	-13.48	74.00	Peak
3	*	5369.34	46.87	15.89	62.77	-11.23	74.00	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5310 MHz		

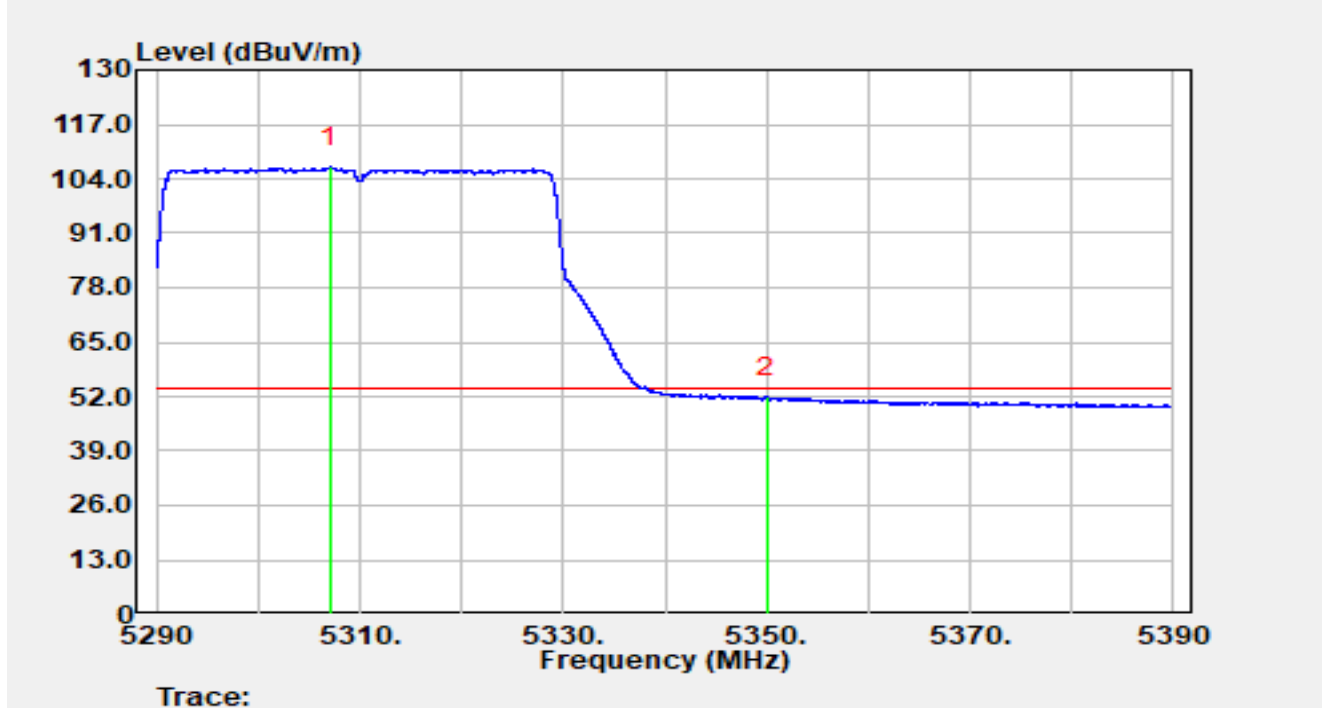


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5307.06	90.89	15.84	106.72	N/A	N/A	Average
2	*	5350.00	36.04	15.72	51.76	-2.24	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5310 MHz		

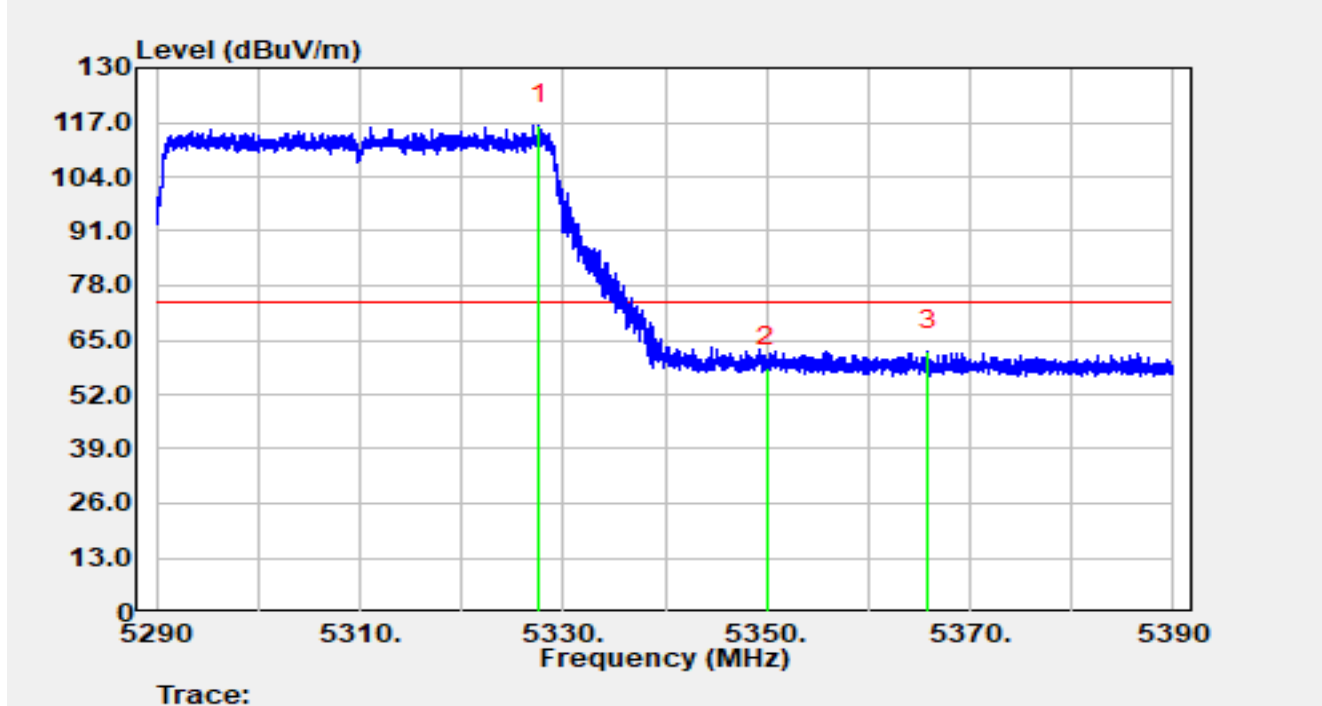


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5327.67	100.47	15.85	116.32	N/A	N/A	Peak
2		5350.00	42.71	15.72	58.44	-15.56	74.00	Peak
3	*	5365.85	46.49	15.87	62.35	-11.65	74.00	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5310 MHz		

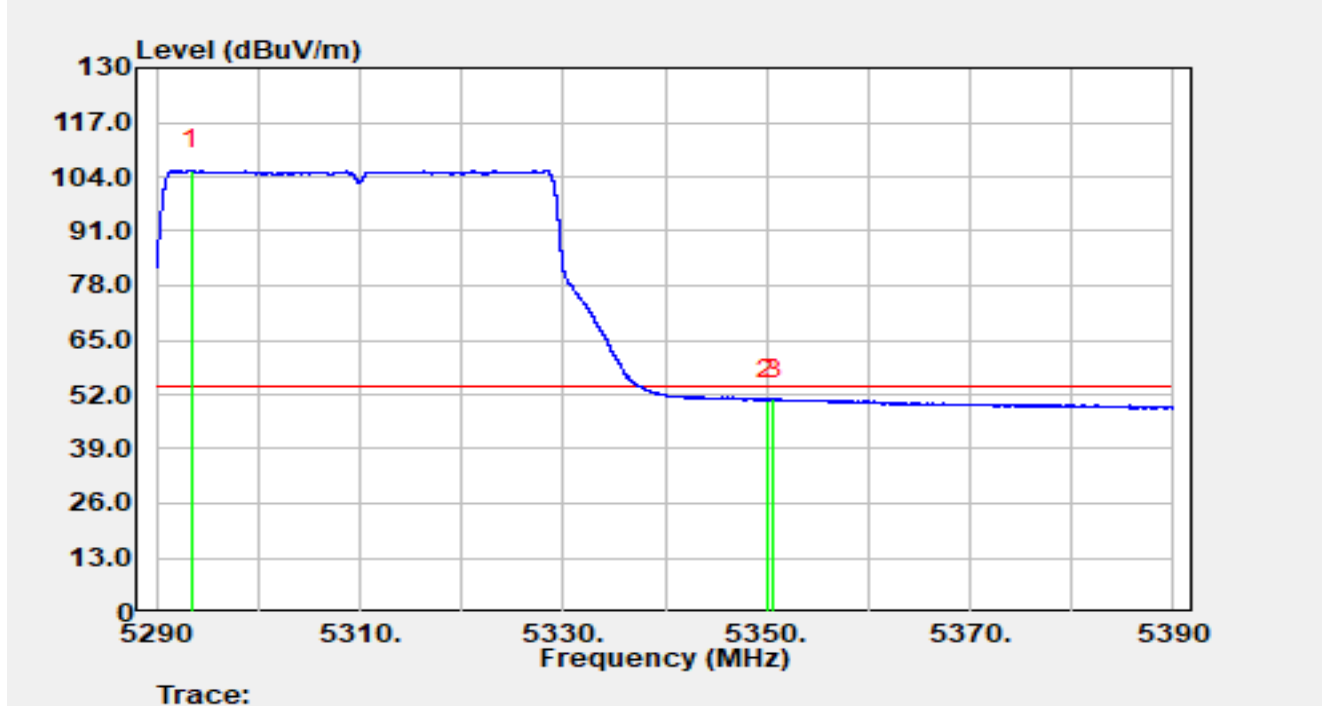


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5293.45	89.80	15.87	105.67	N/A	N/A	Average
2		5350.00	34.93	15.72	50.66	-3.34	54.00	Average
3	*	5350.65	35.11	15.73	50.84	-3.16	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

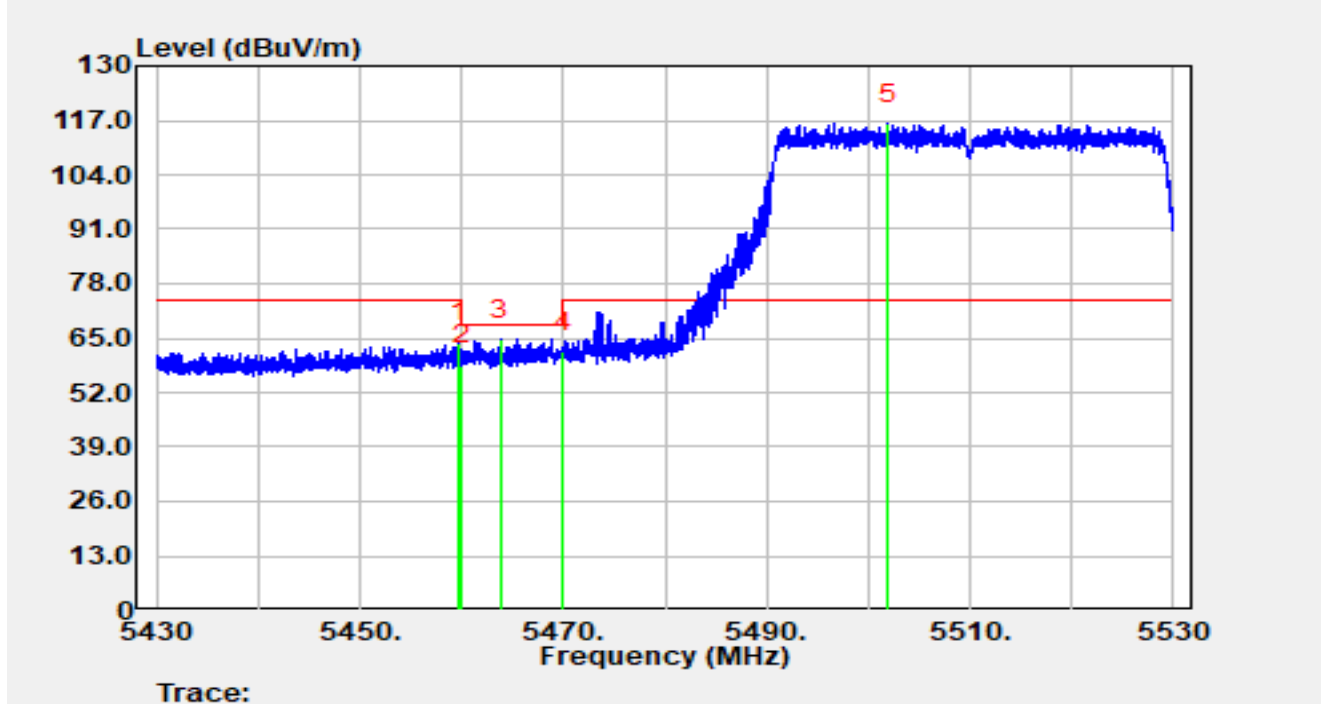


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.80	47.83	16.00	63.83	-10.17	74.00	Peak
2		5460.00	42.54	16.00	58.54	-9.66	68.20	Peak
3	*	5463.81	48.74	15.98	64.72	-3.48	68.20	Peak
4		5470.00	45.67	15.97	61.64	-6.56	68.20	Peak
5		5501.92	99.95	16.30	116.25	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

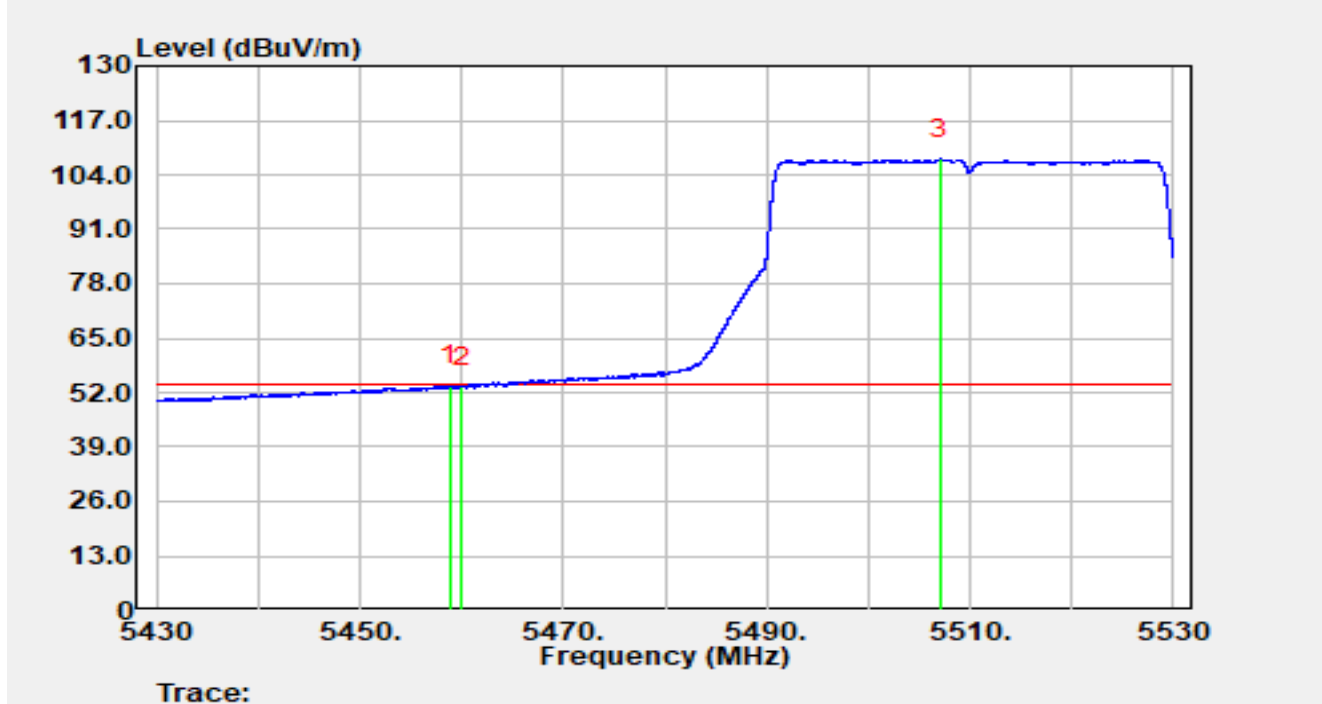


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.79	37.57	16.01	53.58	-0.42	54.00	Average
2		5460.00	37.37	16.00	53.37	-0.63	54.00	Average
3		5507.05	91.48	16.30	107.78	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

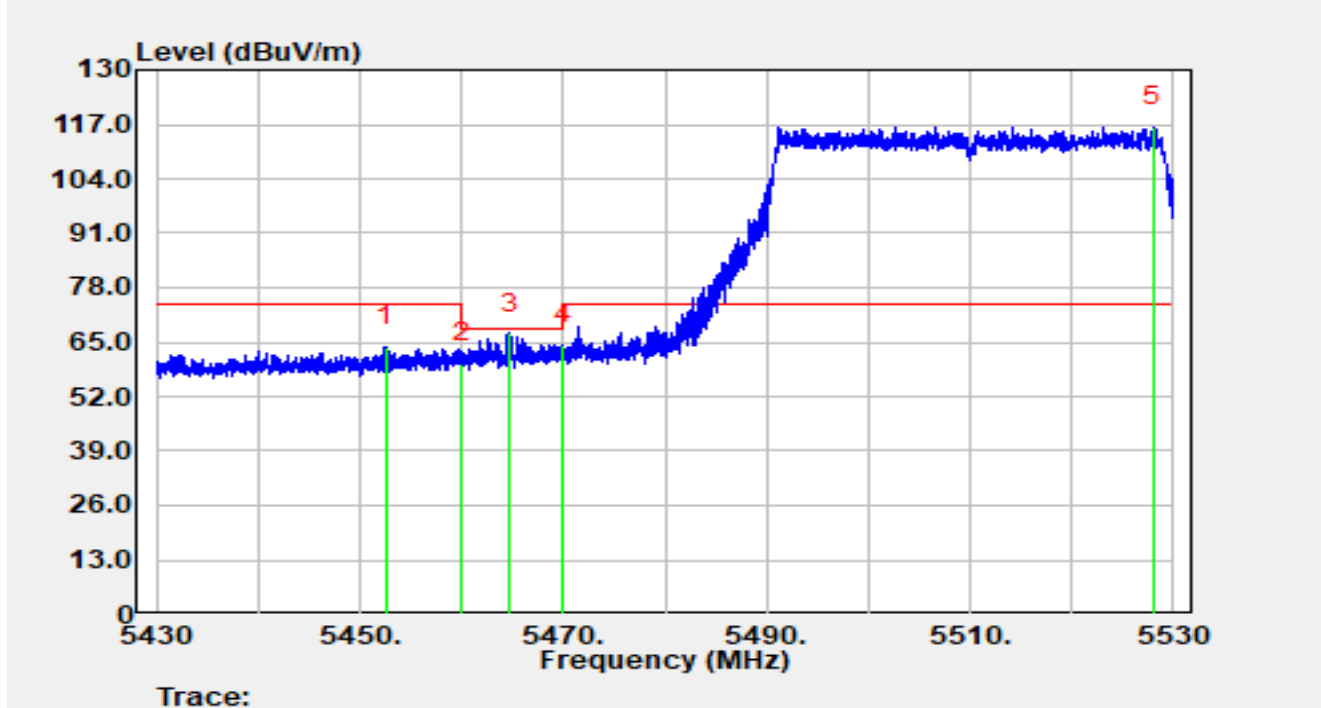


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5452.51	47.90	16.03	63.93	-10.07	74.00	Peak
2		5460.00	43.98	16.00	59.98	-8.22	68.20	Peak
3	*	5464.73	51.13	15.97	67.10	-1.10	68.20	Peak
4		5470.00	48.36	15.97	64.33	-3.87	68.20	Peak
5		5528.05	100.02	16.41	116.43	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

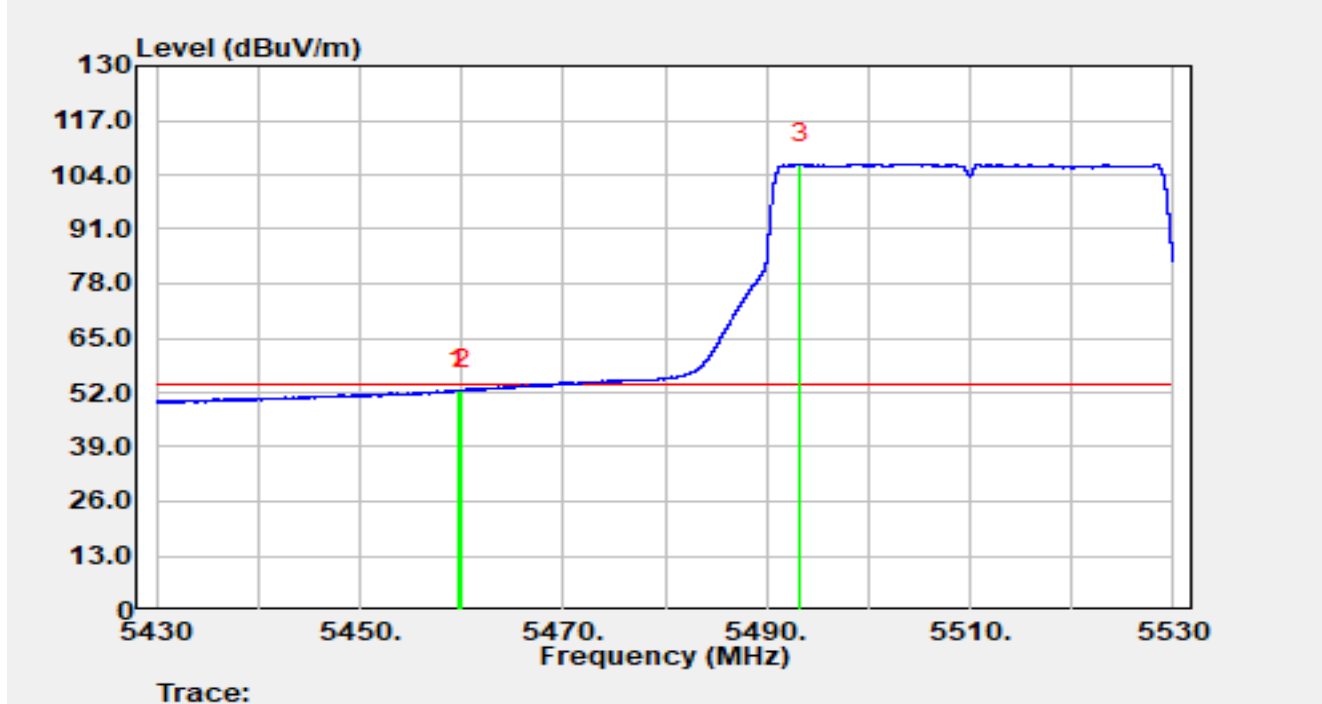


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.68	36.68	16.00	52.68	-1.32	54.00	Average
2		5460.00	36.52	16.00	52.52	-1.48	54.00	Average
3		5493.34	90.39	16.23	106.63	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5670 MHz		

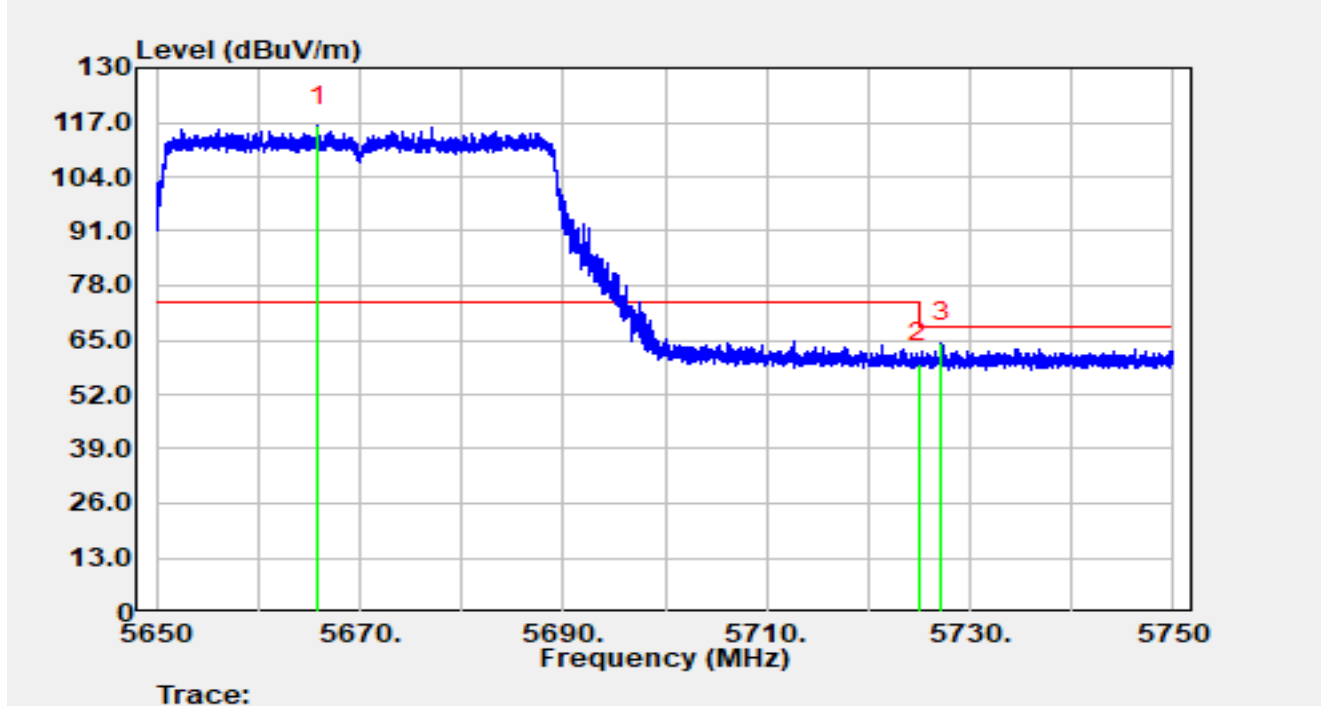


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5665.88	99.13	16.89	116.02	N/A	N/A	Peak
2		5725.00	42.61	16.98	59.59	-8.61	68.20	Peak
3	*	5727.23	47.44	16.97	64.42	-3.78	68.20	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5670 MHz		

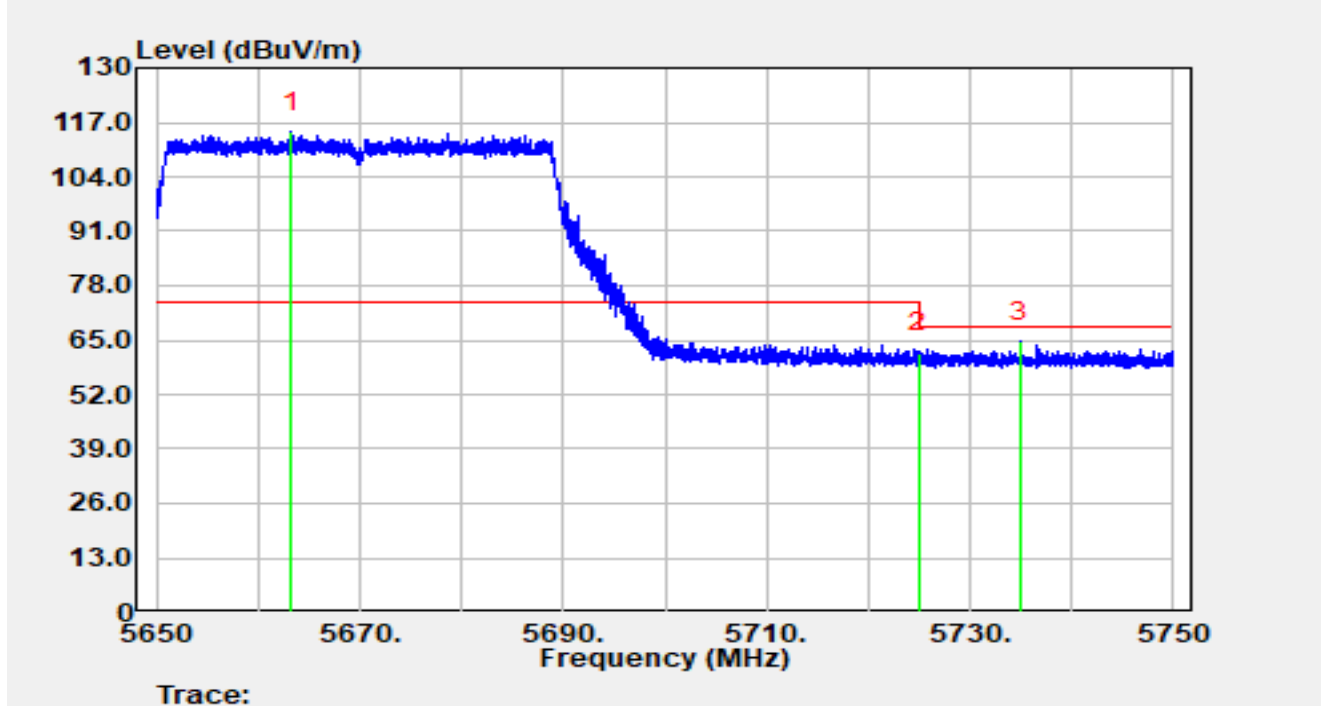


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5663.28	97.75	16.87	114.63	N/A	N/A	Peak
2		5725.00	45.07	16.98	62.05	-6.15	68.20	Peak
3	*	5734.93	47.73	16.96	64.70	-3.50	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5755 MHz		

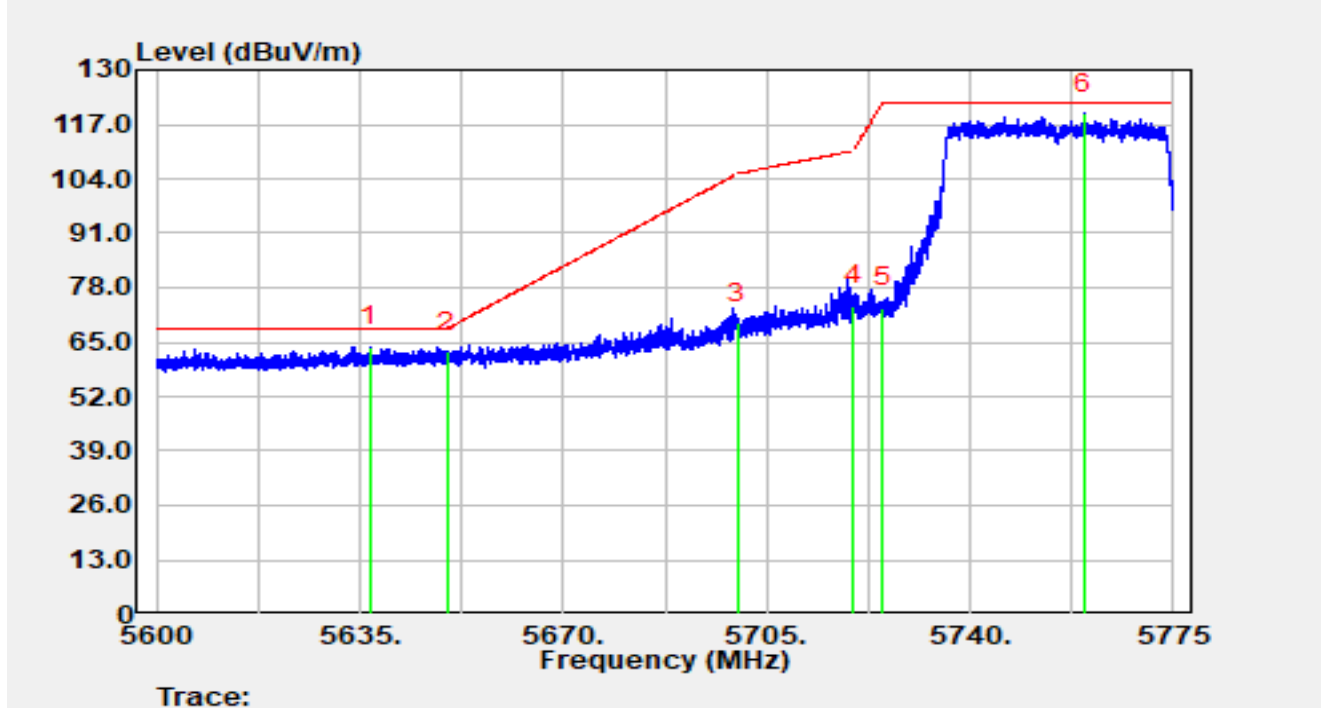


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5636.70	47.19	16.72	63.91	-4.29	68.20	Peak
2		5650.00	45.96	16.79	62.75	-5.45	68.20	Peak
3		5700.00	52.54	17.03	69.57	-35.63	105.20	Peak
4		5720.00	56.68	16.98	73.66	-37.14	110.80	Peak
5		5725.00	56.12	16.98	73.10	-49.10	122.20	Peak
6		5759.53	102.39	17.11	119.50	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5755 MHz		

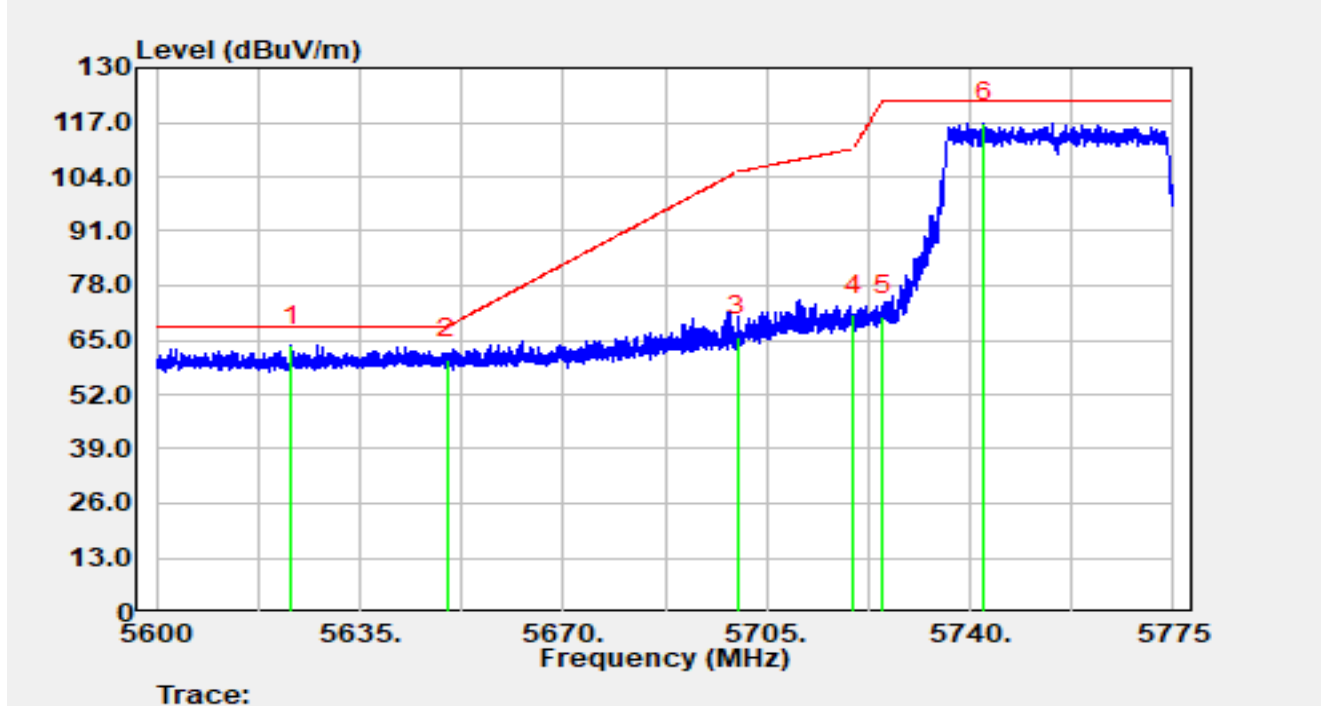


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5623.14	47.28	16.49	63.76	-4.44	68.20	Peak
2		5650.00	43.79	16.79	60.58	-7.62	68.20	Peak
3		5700.00	48.94	17.03	65.98	-39.22	105.20	Peak
4		5720.00	54.00	16.98	70.99	-39.81	110.80	Peak
5		5725.00	53.73	16.98	70.70	-51.50	122.20	Peak
6		5742.40	100.02	16.96	116.98	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5795 MHz		

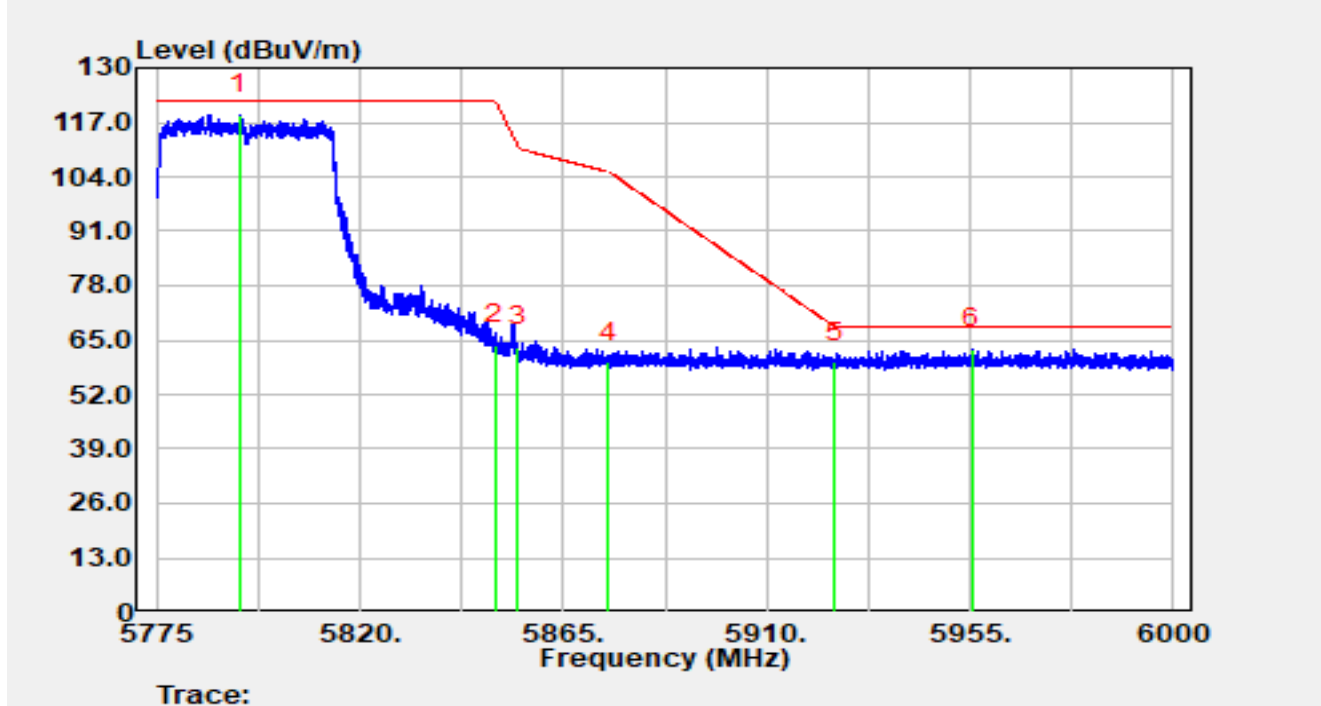


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5793.41	101.60	17.27	118.87	N/A	N/A	Peak
2		5850.00	46.23	17.56	63.79	-58.41	122.20	Peak
3		5855.00	45.76	17.52	63.29	-47.51	110.80	Peak
4		5875.00	42.15	17.61	59.76	-45.44	105.20	Peak
5		5925.00	42.34	17.49	59.83	-8.37	68.20	Peak
6	*	5955.41	45.29	17.65	62.95	-5.25	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5.8G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT40 at 5795 MHz		

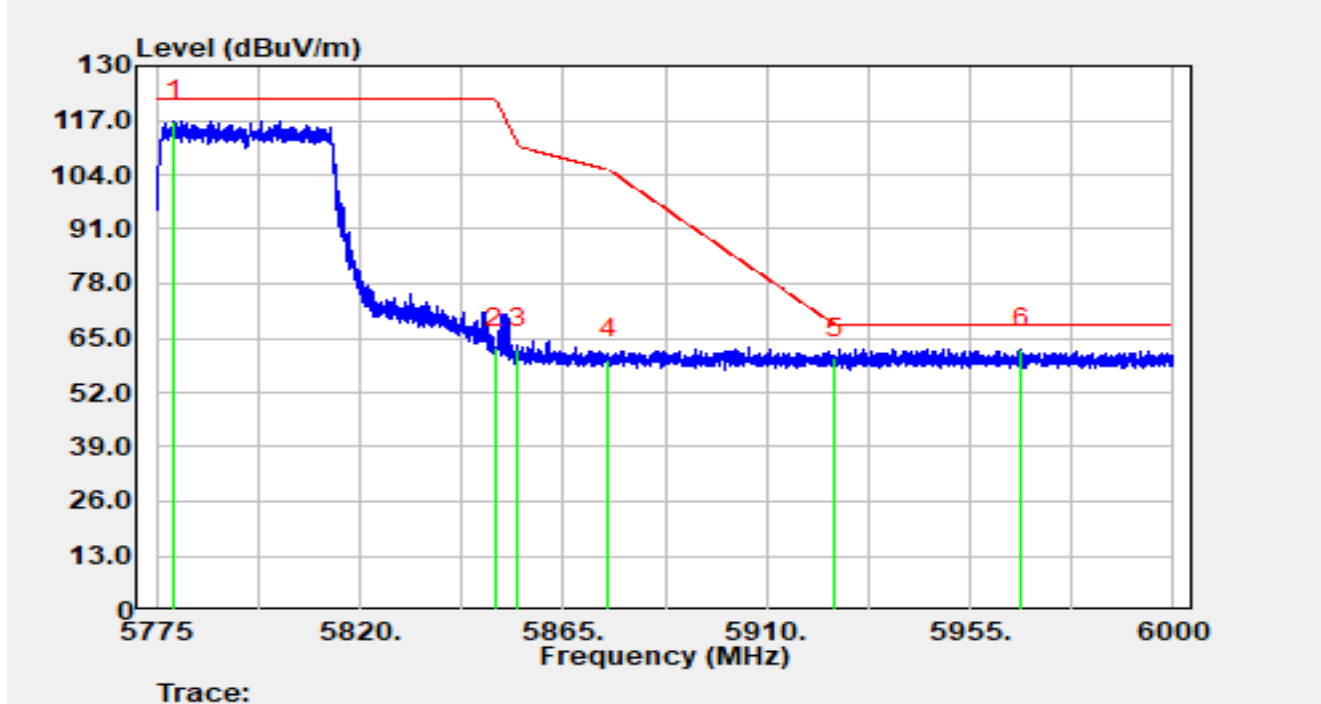


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5779.01	99.77	17.23	116.99	N/A	N/A	Peak
2		5850.00	45.07	17.56	62.64	-59.56	122.20	Peak
3		5855.00	44.95	17.52	62.48	-48.32	110.80	Peak
4		5875.00	42.32	17.61	59.93	-45.27	105.20	Peak
5		5925.00	42.73	17.49	60.21	-7.99	68.20	Peak
6	*	5966.27	44.81	17.68	62.49	-5.71	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5210 MHz		

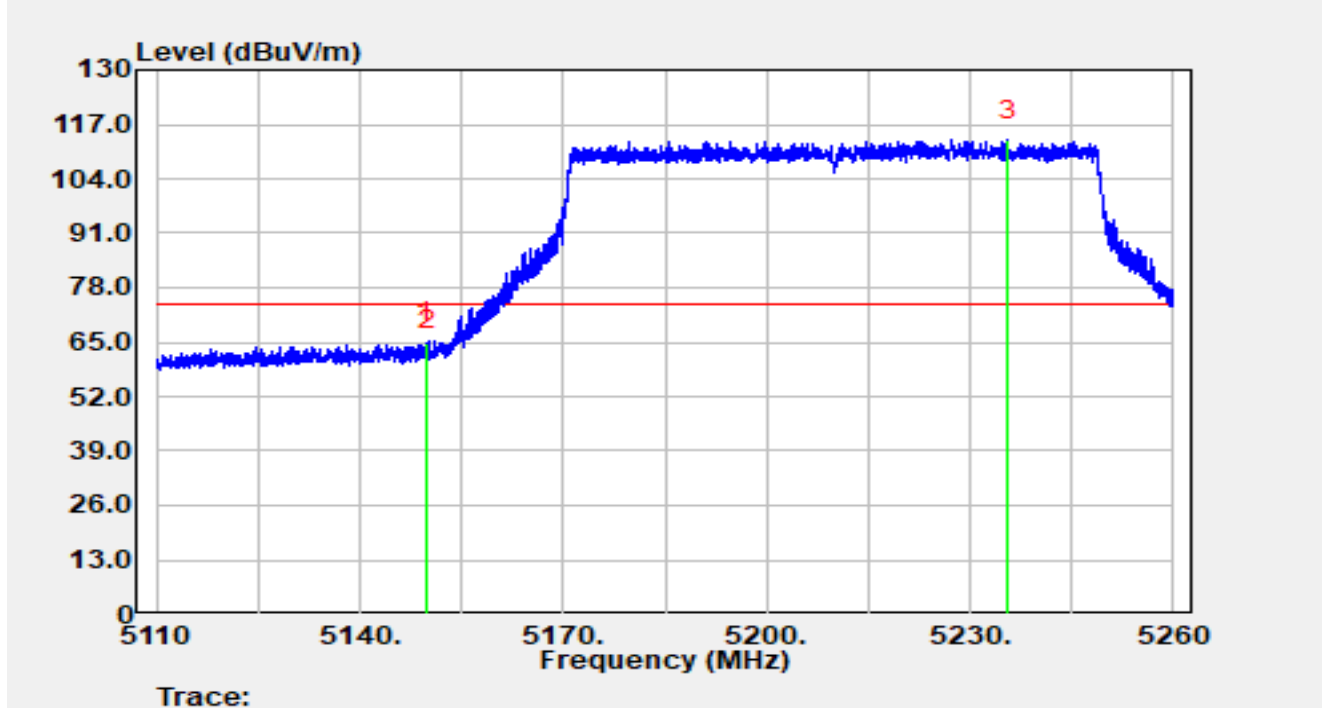


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.81	48.90	15.99	64.89	-9.11	74.00	Peak
2		5150.00	47.15	15.99	63.14	-10.86	74.00	Peak
3		5235.63	97.10	16.18	113.28	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5210 MHz		

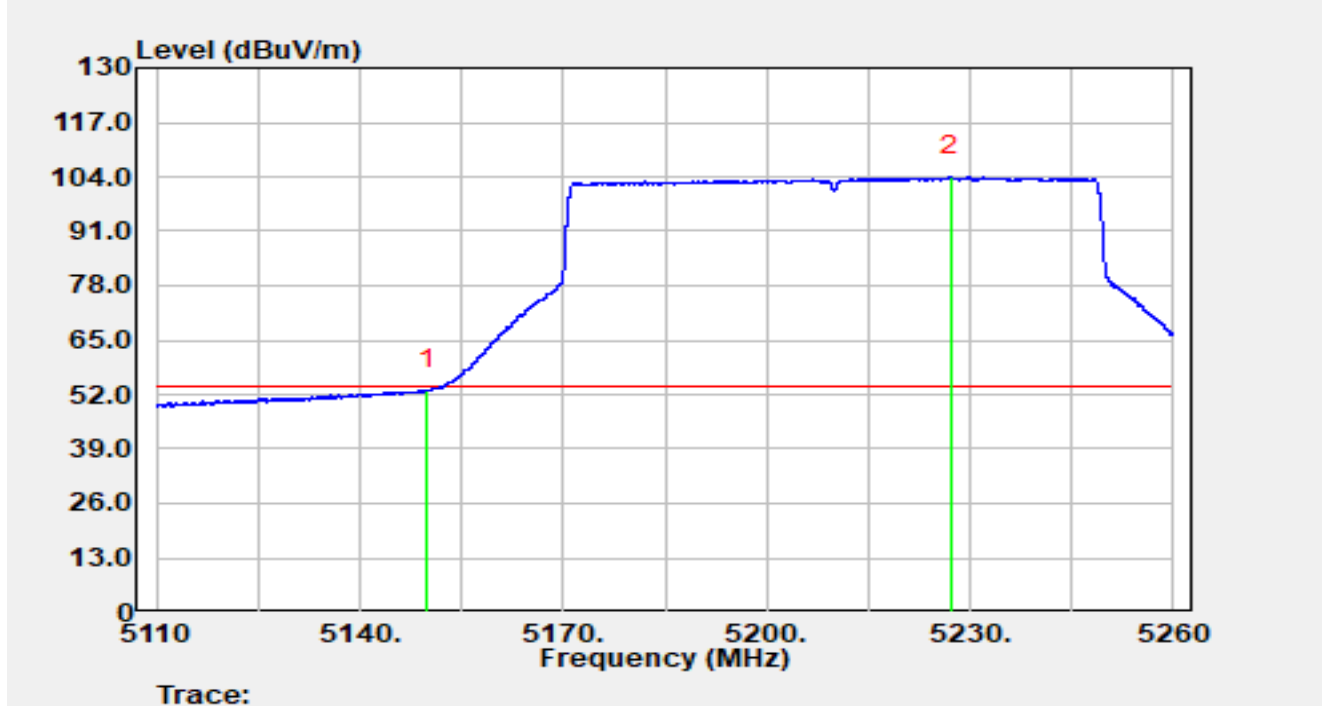


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.01	37.01	15.99	53.00	-1.00	54.00	Average
2		5227.12	87.79	16.25	104.04	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5210 MHz		

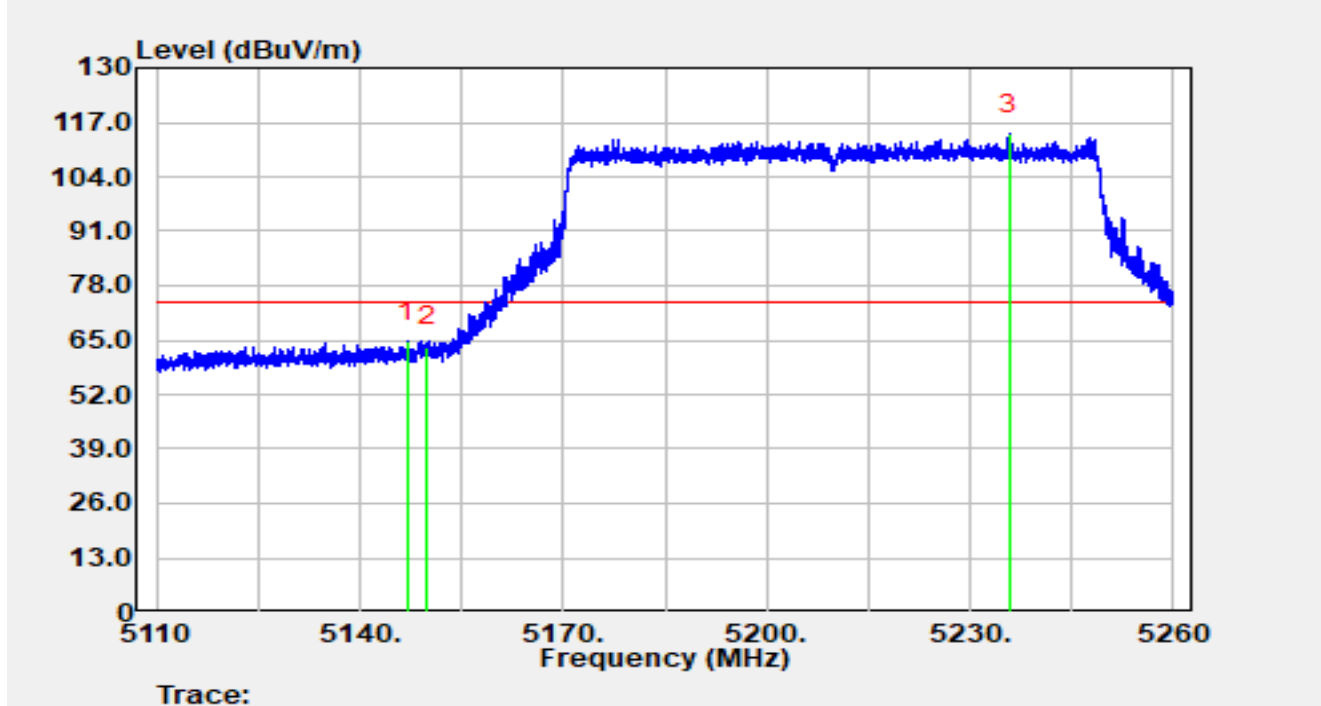


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.98	48.75	15.98	64.73	-9.27	74.00	Peak
2		5150.00	47.49	15.99	63.48	-10.52	74.00	Peak
3		5235.72	97.89	16.18	114.06	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5210 MHz		

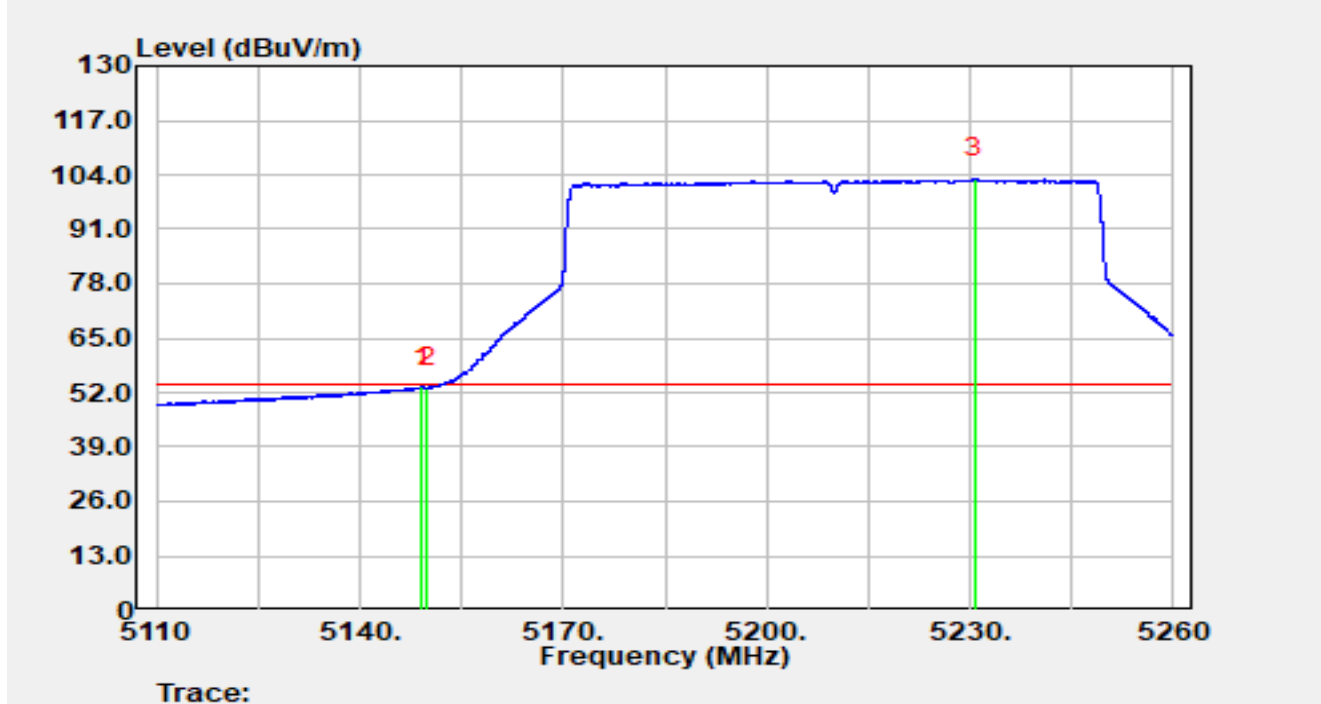


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.24	37.34	15.99	53.33	-0.67	54.00	Average
2		5150.00	37.10	15.99	53.10	-0.90	54.00	Average
3		5230.68	86.74	16.28	103.02	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-08-08
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5290 MHz		

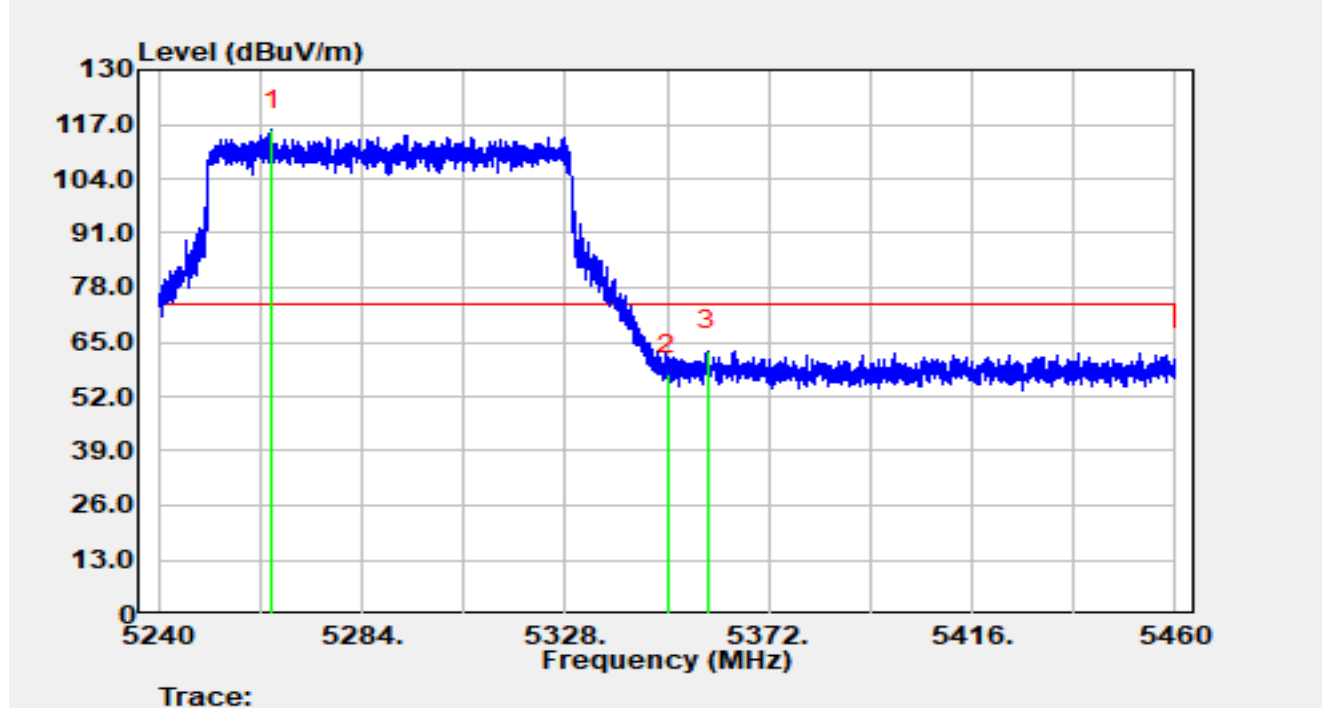


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5264.53	99.79	15.88	115.66	N/A	N/A	Peak
2		5350.00	41.53	15.72	57.26	-16.74	74.00	Peak
3	*	5358.67	47.24	15.80	63.04	-10.96	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-08-08
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5290 MHz		

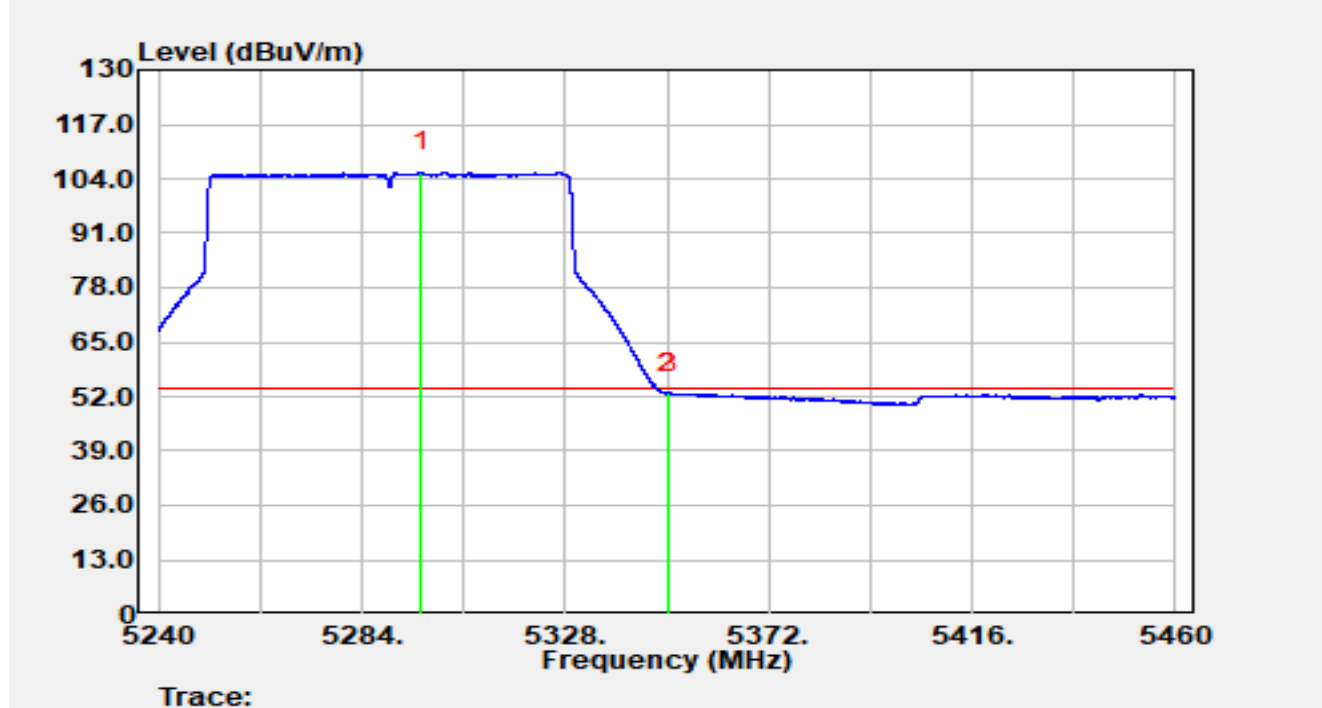


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5296.80	89.79	15.88	105.67	N/A	N/A	Average
2		5350.00	37.05	15.72	52.78	-1.22	54.00	Average
3	*	5350.42	37.23	15.73	52.95	-1.05	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-08-08
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5290 MHz		

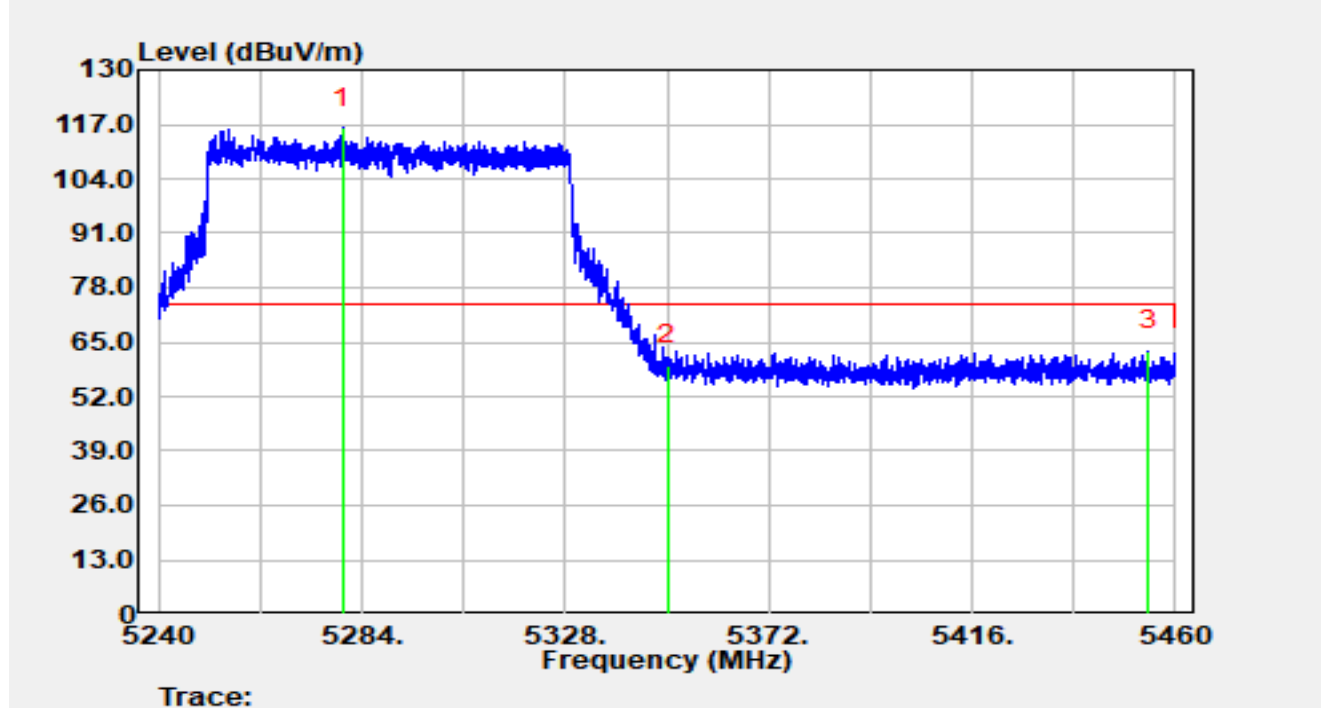


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5279.78	100.24	15.81	116.05	N/A	N/A	Peak
2		5350.00	43.65	15.72	59.38	-14.62	74.00	Peak
3	*	5454.13	46.89	16.02	62.91	-11.09	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-08-08
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5290 MHz		

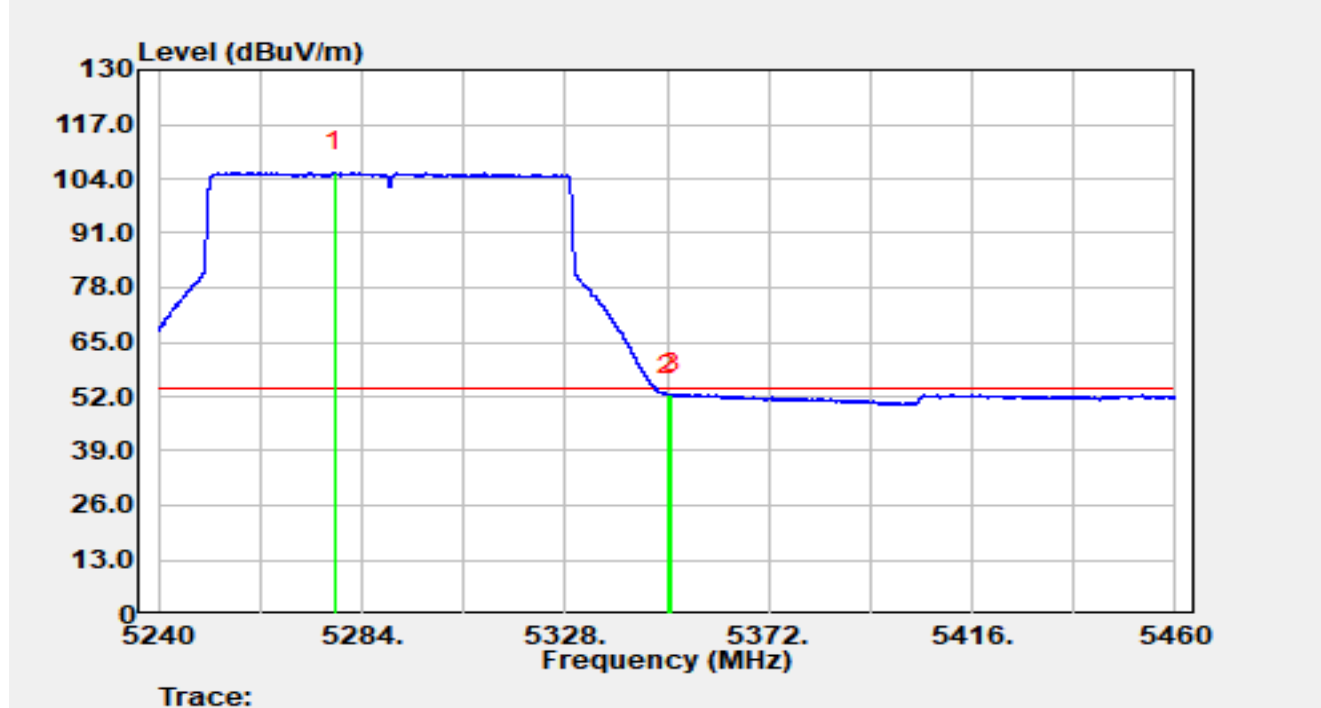


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5278.13	89.90	15.81	105.71	N/A	N/A	Average
2		5350.00	36.71	15.72	52.43	-1.57	54.00	Average
3	*	5351.12	36.86	15.73	52.60	-1.40	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5530 MHz		

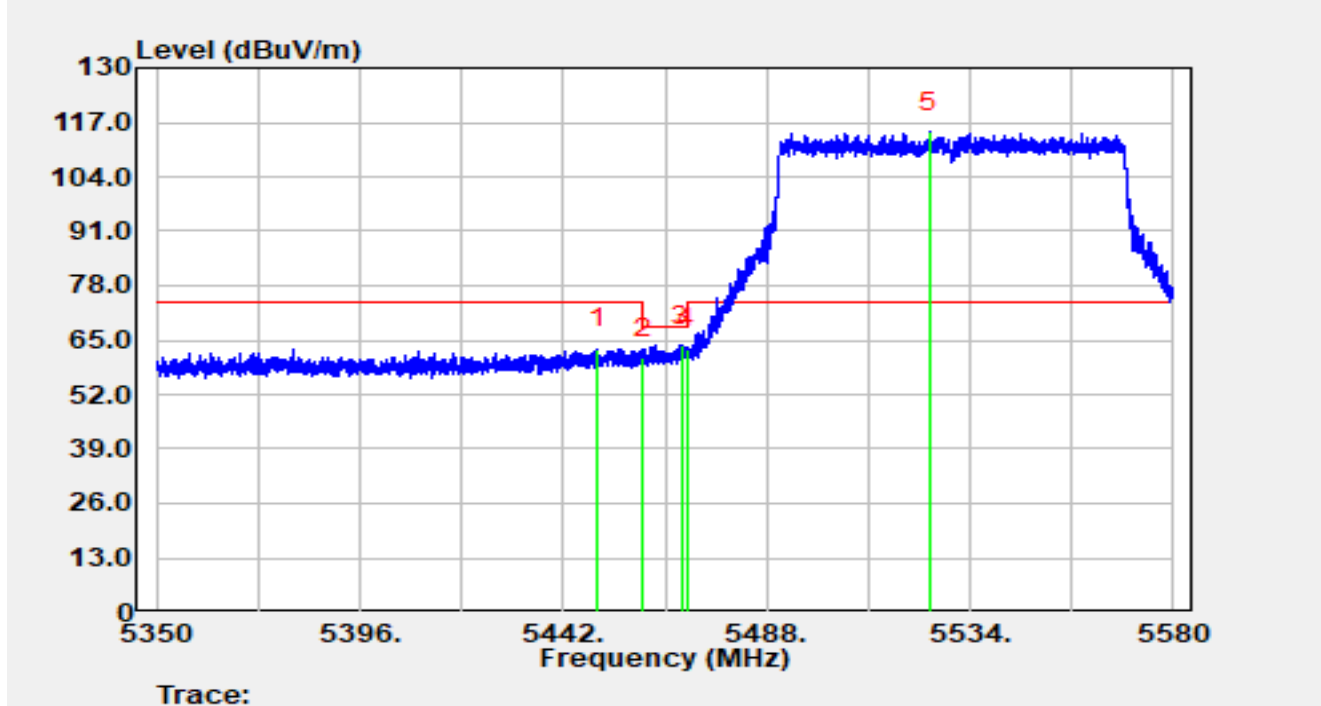


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5449.73	46.80	16.00	62.80	-11.20	74.00	Peak
2		5460.00	44.70	16.00	60.70	-7.50	68.20	Peak
3	*	5468.75	47.81	15.95	63.77	-4.43	68.20	Peak
4		5470.00	47.06	15.97	63.03	-5.17	68.20	Peak
5		5524.85	98.27	16.36	114.63	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5530 MHz		

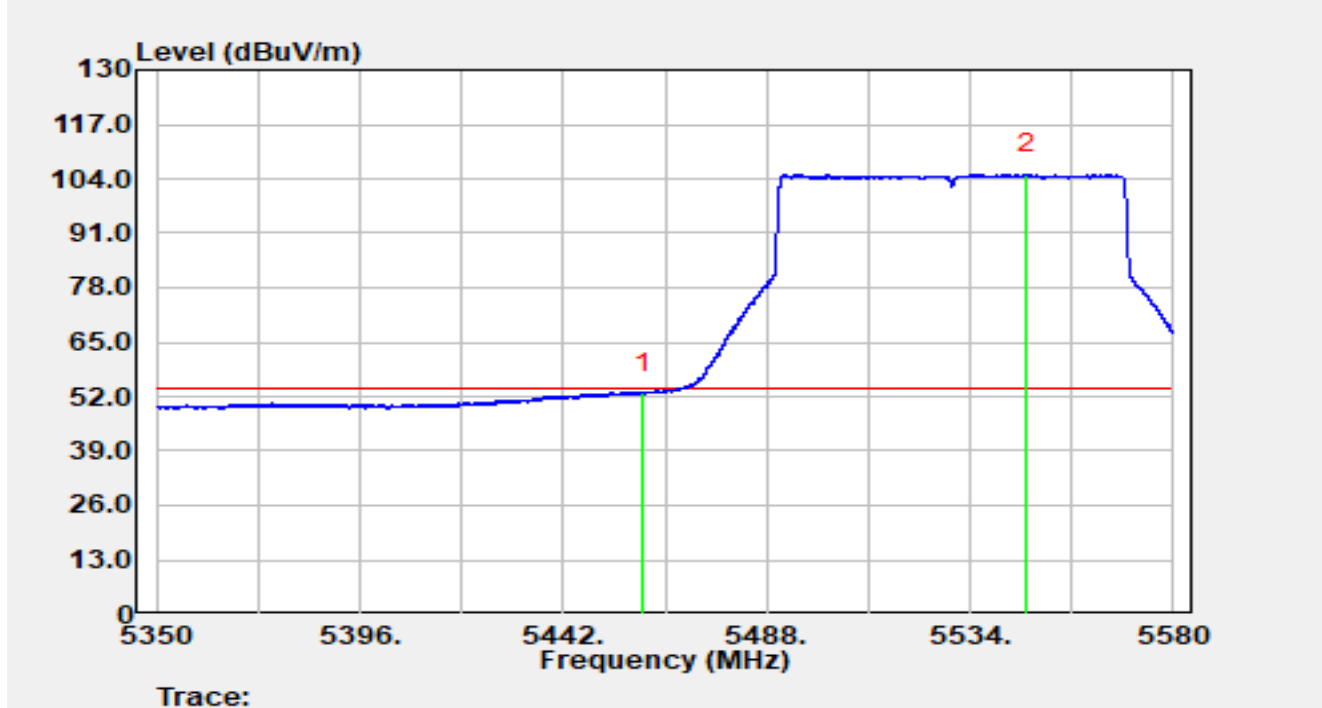


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.01	36.93	16.00	52.93	-1.07	54.00	Average
2		5534.93	88.46	16.53	104.99	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5530 MHz		

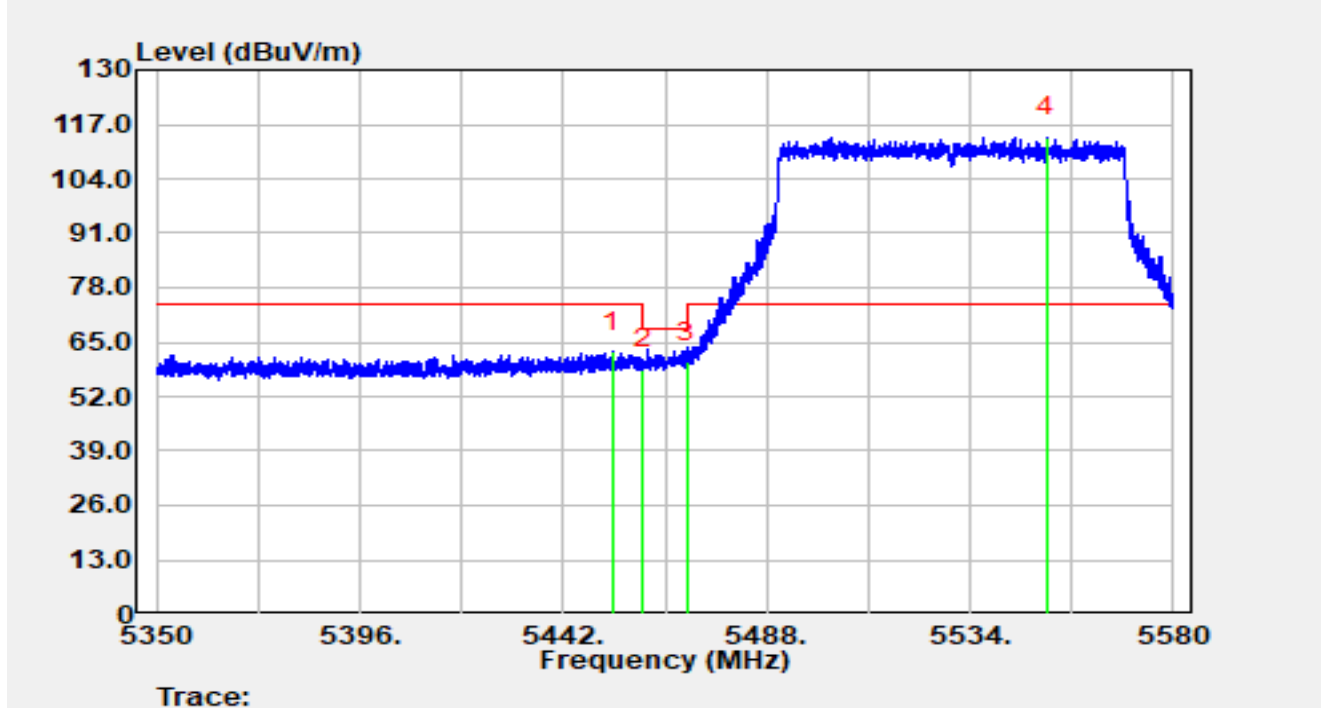


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5453.06	46.75	16.03	62.78	-11.22	74.00	Peak
2		5460.00	42.61	16.00	58.61	-9.59	68.20	Peak
3	*	5470.00	44.37	15.97	60.34	-7.86	68.20	Peak
4		5551.37	97.35	16.52	113.87	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-24
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5530 MHz		

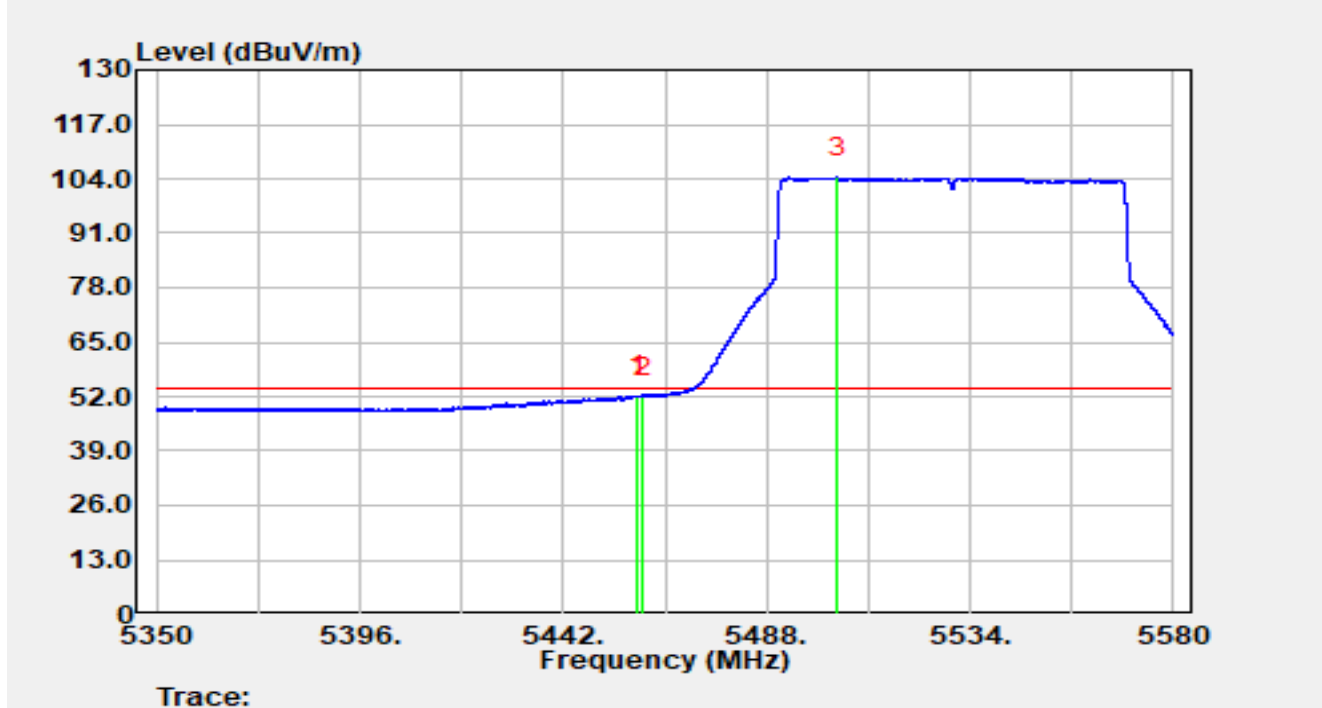


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.88	36.21	16.01	52.22	-1.78	54.00	Average
2		5460.00	35.89	16.00	51.89	-2.11	54.00	Average
3		5503.94	87.96	16.30	104.26	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-30
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5610 MHz		

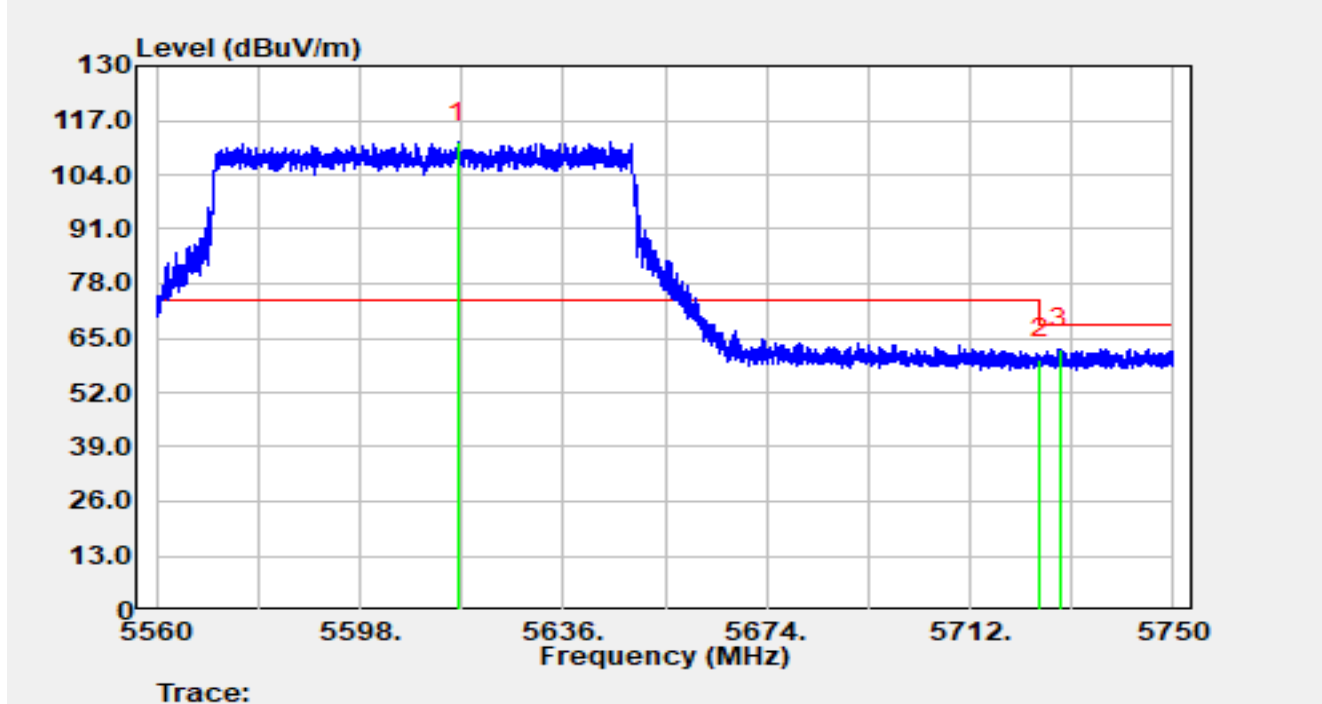


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5616.37	95.26	16.50	111.76	N/A	N/A	Peak
2		5725.00	43.00	16.98	59.97	-8.23	68.20	Peak
3	*	5728.91	45.50	16.97	62.47	-5.73	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-07-30
Temperature	27.6 °C	Humidity	58.1%
Limit	FCC_5G_RE (3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	Wi-Fi 7 Outdoor Mesh AP	Test Voltage	By PoE
Test Mode	Transmit by 802.11be-EHT80 at 5610 MHz		

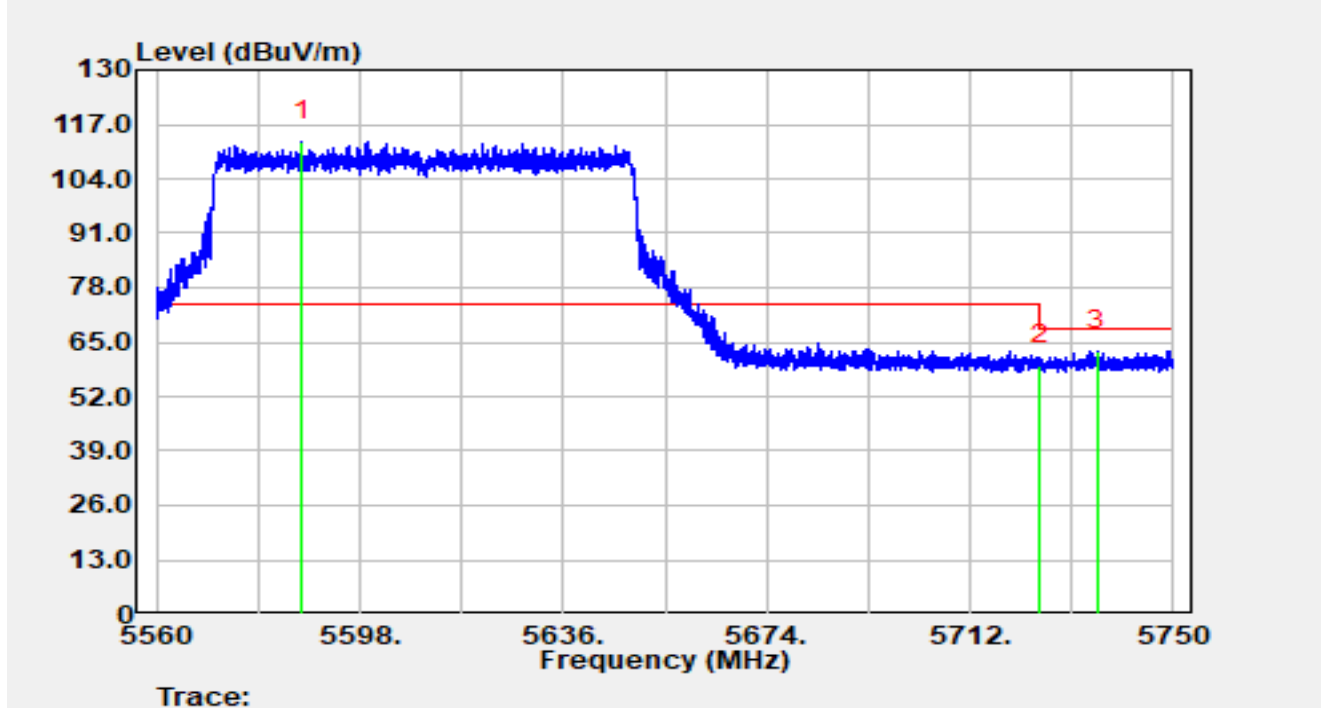

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5587.25	96.57	16.45	113.02	N/A	N/A	Peak
2		5725.00	42.44	16.98	59.42	-8.78	68.20	Peak
3	*	5735.83	46.04	16.96	63.00	-5.20	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).