

ENGINEERING TEST REPORT



VHF CHANNEL MODULE (MOBILE RADIO TRANSLATOR) MODEL NO.: CM VHF HP

FCC ID: LO6CMVHFHP

FCC PART 2 & PART 90, SUBPART I
RADIO SERVICES FOR COMMERCIAL/INDUSTRIAL USES
7.5 kHz, 12.5 kHz & 25 kHz Channel Spacings

UltraTech's FILE NO.: FSG-22BFT

Tested for:

FUTURECOM SYSTEMS GROUP INC.

110 Snow Blvd., Unit #3
Concord, Ontario
Canada, L4K 4B8

Tested by:

UltraTech - Group of Labs

3000 Bristol Circle
Oakville, Ontario
Canada L6H 6G4

Report Prepared by: Tri M. Luu, P.Eng.

DATE: July 14, 1999

UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4
Telephone (905) 829-1570 Facsimile (905) 829-8050
Website: www.ultratech-labs.com Email: vhk.ultratech@sympatico.ca

TABLE OF CONTENTS

1.	EXHIBIT 1 - SUMMARY OF TEST RESULTS & GENERAL STATEMENT OF CERTIFICATION.....	3
2.	EXHIBIT 2 - GENERAL INFORMATION.....	5
2.1	APPLICANT.....	5
2.2	MANUFACTURER.....	5
2.3	DESCRIPTION OF EQUIPMENT UNDER TESTS.....	5
2.4	RELATED SUBMITTALS)/GRANT.....	6
2.5	TEST METHODOLOGY.....	7
2.6	TEST FACILITY.....	7
2.7	UNITS OF MEASUREMENTS.....	7
3.	EXHIBIT 3 - SYSTEM TEST CONFIGURATION.....	8
3.1	TEST SYSTEM DETAILS.....	8
3.2	BLOCK DIAGRAMS OF TEST SET-UP.....	8
3.3	PHOTOGRAPHS FOR TEST SETUP.....	9
3.3.1	TEST SETUP FOR RADIATED EMISSIONS MEASUREMENTS.....	9
3.4	JUSTIFICATION.....	10
3.5	EUT OPERATING CONDITION.....	10
3.6	SPECIAL ACCESSORIES.....	10
3.7	EQUIPMENT MODIFICATIONS.....	10
4.	EXHIBIT 4 - TEST DATA.....	11
4.1	POWER AND ANTENNA HEIGHT @ FCC 90.205.....	11
4.2	FREQUENCY STABILITY @ FCC 90.213.....	13
4.3	MODULATION LIMITING @ FCC 90.210.....	19
4.4	EMISSION MASKS @ FCC 90.210.....	21
4.5	TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS @ FCC 90.210.....	23
4.6	TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS @ FCC 90.210.....	27
5.	EXHIBIT 5 - GENERAL TEST PROCEDURES.....	33
5.1	ELECTRICAL FIELD RADIATED EMISSIONS MEASUREMENTS - GENERAL TEST METHOD.....	33
6.	EXHIBIT 6 - INFORMATION RELATED TO EQUIPMENT UNDER TESTS.....	35
6.1	FCC ID LABELLING AND SKETCH OF FCC LABEL LOCATION.....	35
6.2	PHOTOGRAPHS OF EQUIPMENT UNDER TEST.....	35
6.3	SYSTEM BLOCK DIAGRAM(S).....	35
6.4	SCHEMATIC DIAGRAMS.....	35
6.5	USER'S MANUAL WITH "FCC INFORMATION TO USER STATEMENTS".....	35

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT
July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

1. EXHIBIT 1 - SUMMARY OF TEST RESULTS & GENERAL STATEMENT OF CERTIFICATION

FCC PARAGRAPH.	TEST REQUIREMENTS	COMPLIANCE (YES/NO)
90.205 & 2.985	RF Power Output	Yes
90.213 & 2.995	Frequency Stability	Yes
90.242(b)(8) & 2.987(a)	Audio Frequency Response	Not applicable for Mobile Radio Translator device
90.210 & 2.987(b)	Modulation Limiting	Yes
90.210 & 2.989	Emission Masks	Yes
90.210, 2.997 & 2.991	Emission Limits - Spurious Emissions at Antenna Terminal	Yes
90.210, 2.997 & 2.993	Emission Limits - Field Strength of Spurious Emissions	Yes
90.214	Transient Frequency Behavior	Not applicable for Mobile Radio Translator device

VHF CHANNEL MODULE (MOBILE RADIO TRANSLATOR), Model No.: CM VHF HP, by FUTURECOM SYSTEMS GROUP INC. has also been tested and found to comply with FCC Part 15, Subpart B - Radio Receivers and Class A Digital Devices. The engineering test report has been documented and kept in file and it is available anytime upon FCC request.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT
July 14, 1999


- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

TESTIMONIAL AND STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY:

- 1) *THAT the application was prepared either by, or under the direct supervision of the undersigned.*
- 2) *THAT the measurement data supplied with the application was taken under my direction and supervision.*
- 3) *THAT the data was obtained on representative production units, representative.*
- 4) *THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.*

Certified by:

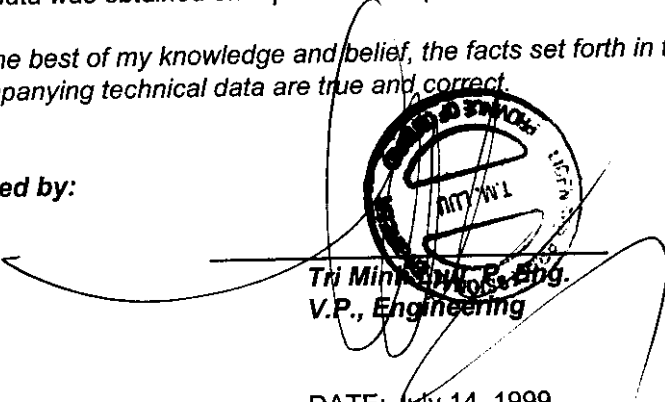
**Tri Minh, B. Eng.
V.P., Engineering**

DATE: July 14, 1999

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT
July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

2. EXHIBIT 2 - GENERAL INFORMATION

2.1 APPLICANT

FUTURECOM SYSTEMS GROUP INC.
110 Snow Blvd., Unit #3
Concord, Ontario
Canada, L4K 4B8

Applicant's Representative: Mr. Tony Bombera

2.2 MANUFACTURER

FUTURECOM SYSTEMS GROUP INC.
110 Snow Blvd., Unit #3
Concord, Ontario
Canada, L4K 4B8

2.3 DESCRIPTION OF EQUIPMENT UNDER TESTS

PRODUCT NAME:	VHF CHANNEL MODULE (MOBILE RADIO TRANSLATOR)
MODEL NUMBER:	CM VHF HP
SERIAL NUMBER:	Pre-production
TYPE OF EQUIPMENT:	Radio Services Transmitters
SERVICES AREAS:	Commercial/Industrial
OSC. FREQUENCY(IES):	14.7456 MHz
CPU SPEED:	1.2288 MHz
OPERATING FREQ.:	150 - 174 MHz
CHANNEL SPACINGS	7.5 kHz, 12.5 kHz and 25kHz
POWER RATING:	20.8 Watts max.
OUTPUT IMPEDANCE:	50 Ohms
DUTY CYCLE:	Continuous
99% BANDWIDTH:	Same as the Input Signal
BAUD RATES:	Same as Input signal source

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT
July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EMISSION DESIGNATION: FE3, F1D

Since the characteristics of the rf output signal is the same as those of the rf input signal, the necessary bandwidth will be same as what input to this Mobile Radio Translator.

INPUT SUPPLY: 13.8 Vdc Battery

ASSOCIATED DEVICES: N/A

FCC ID: LO6CMVHFHP

INTERFACE PORTS:

- (1) RF IN (SMA)
- (2) RF OUT (SMA)
- (3) DC IN & Data Port (Pin Header)
- (4) RS-232 (DIN) – For factory uses only

2.4 RELATED SUBMITTALS)/GRANT

Not applicable

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT
July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

2.5 TEST METHODOLOGY

These tests were conducted on a sample of the equipment for the purpose of certification compliance with Code of Federal Regulations, Parts 2 & 90, Subpart I, Radio Services Operating in the Frequency Bands 150 - 174 MHz.

Radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

2.6 TEST FACILITY

Radiated Emissions were performed at the Ultratech's 3 Meter Open Field Test Site (OFTS) situated in the Town of Oakville, province of Ontario.

The above site have been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville Open Field Test Site has been filed with FCC office (FCC File No.: 31040/SIT 1300B3) and Industry Canada office (Industry Canada File No.: IC2049). Last Date of Site Calibration: Sep. 20, 1998.

The above test site is also filed with Interference Technology International Ltd (ITI - An EC Directive on EMC).

2.7 UNITS OF MEASUREMENTS

Measurements of radiated emissions are reported in units of dB referenced to one microvolt per meter [dB(uV)/m] at the distance specified in the report, wherever it is applicable.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT
July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

3. EXHIBIT 3 - SYSTEM TEST CONFIGURATION

3.1 TEST SYSTEM DETAILS


The following peripherals, FCC identifiers and types interconnecting cables were used with the EUT for testing:

- (1) **EUT:** FUTURECOM SYSTEMS GROUP INC., VHF CHANNEL MODULE (MOBILE RADIO TRANSLATOR), Model: CM VHF HP, S/N: Pre-production.
I/O Cable: All I/O cables were shielded
Power Supply Cable: Non-shielded

RF INPUT SIMULATING DEVICES:

1. **RF Synthesized RF Signal Generator**, Fluke, Model 6061A, frequency range 10KHz-1050MHz, power output 13dBm max.
2. **Audio Oscillator**, HP, Model 204C, SN: 0989A08798, Output: 0-1.2 MHz, 5 Vrms.
3. **9600 b/s Random Data Generator (Digital Speech Encryption)**, Voice Guard, Model 9600-SW, P/N: 19A148909P, S/N: 9614517.

3.2 BLOCK DIAGRAMS OF TEST SET-UP

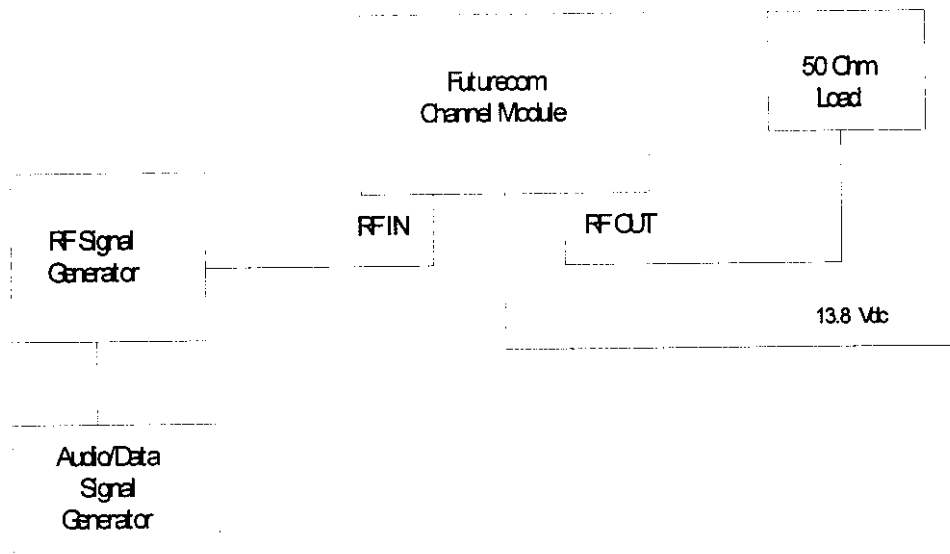

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT
July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

3.4 JUSTIFICATION

No deviation, in both configuration and operation manners, different from normal operation were required.

3.5 EUT OPERATING CONDITION

Transmitter/receiver was turned on continuously for testing. The transmitter's carrier was modulated with modulating signal as mentioned in the test data.

3.6 SPECIAL ACCESSORIES

No special accessories were required.

3.7 EQUIPMENT MODIFICATIONS

Not required.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT
July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

4. EXHIBIT 4 - TEST DATA

4.1 POWER AND ANTENNA HEIGHT @ FCC 90.205

PRODUCT NAME: VHF CHANNEL MODULE (MOBILE RADIO TRANSLATOR),
Model No.: CM VHF HP

FCC REQUIREMENTS:

FCC Part 90, Para. 90.205:- Please refer to FCC CFR 47, Part 80 to End, Para. 90.205 for specification details.

CLIMATE CONDITION:

Standard Temperature and Humidity:

- Ambient temperature: 21 °C
- Relative humidity: 43%

POWER INPUT:

13.8 Vdc Battery.

TEST EQUIPMENT:


- Advantest Spectrum Analyzer, Model R3271, S/N: 15050203
- Bird Attenuator, 50 Ohm IN/OUT

METHOD OF MEASUREMENTS:

Refer to FCC @ 2.985

- (a) For transmitter other than single sideband, independent sideband and controlled carrier radiotelephone, power rf output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of the current and voltage on the circuit elements specified in 2.983(d)(5). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

TEST ARRANGEMENT



TEST RESULTS: Conforms.

TESTED PERSONNEL: Hung Trinh, EMI/RFI Technician

DATE: May 18, 1999

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT
July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

MEASUREMENT DATA

PEAK POWER MEASUREMENT AT THE ANTENNA TERMINAL

TEST CONFIGURATION

- The transmitter terminal was coupled to the Spectrum Analyzer through a 30 dB attenuator
- Power of the transmitter channel near the lowest, middle and highest of each frequency block/band were measured using the power meter, and the reading was corrected by the added calibrated attenuator's attenuation value and cable loss.
- The RF Output was turned on with no modulation.

TRANSMITTER CHANNEL OUTPUT	FUNDAMENTAL FREQUENCY (MHz)	MEASURED PEAK POWER (Watts)	PEAK POWER RATING (Watts)
Near lowest	150	20.8	20.0
Middle	162	20.8	20.0
Highest	174	20.8	20.0

ERP Measurements: -Appropriate antenna type, and adjustment of power output for effective radiated power (ERP) to meet FCC limits will be performed by the manufacturer at location of installation.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT
July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

4.2 FREQUENCY STABILITY @ FCC 90.213

PRODUCT NAME: VHF CHANNEL MODULE (MOBILE RADIO TRANSLATOR),
Model No.: CM VHF HP

FCC REQUIREMENTS:

FCC Part 90, Sub. I, Para. 90.213

The carrier frequency of each transmitter shall be maintained within the following tolerances from the assigned frequencies.

FREQUENCY RANGE (MHz)	FIXED & BASE STATIONS (ppm)			MOBILE STATIONS (ppm)					
				> 2 W			≤ 2 W		
	7.5 kHz	12.5 kHz	25 kHz	7.5 kHz	12.5 kHz	25 kHz	7.5 kHz	12.5 kHz	25 kHz
150 –174 MHz	1.0	2.5	5.0	1.0	5.0	5.0	1.0	5.0	5.0

The frequency tolerance limit of 1.0 ppm will be used for a mobile radio operating at rf output greater than 2 Watts.

CLIMATE CONDITION:

Standard Temperature and Humidity: Please refers to Measurement Data

POWER INPUT:

13.8 Vdc Battery.

TEST EQUIPMENT:

- Advantest Spectrum Analyzer, Model R3271, S/N: 15050203
- Tenney Temp. & Humidity Chamber, Model T5, S/N: 9723B
- Bird Attenuator, 50 Ohm IN/OUT

METHOD OF MEASUREMENTS:

Refer to FCC @ 2.995

- (a) The frequency stability shall be measured with variation of ambient temperature as follows:
- From -30 to +50 centigrade except that specified in subparagraph (2) & (3) of this paragraph.
- (b) Frequency measurements shall be made at extremes of the specified temperature range and at intervals of not more than 10 centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stability circuitry need be subjected to the temperature variation test.

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT
July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

- (c) The frequency stability supply shall be measured with variation of primary supply voltage as follows:
- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
 - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
 - (3) The supply voltage shall be measured at the input to the cable normally provide with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.
- (d) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment).

TEST ARRANGEMENT

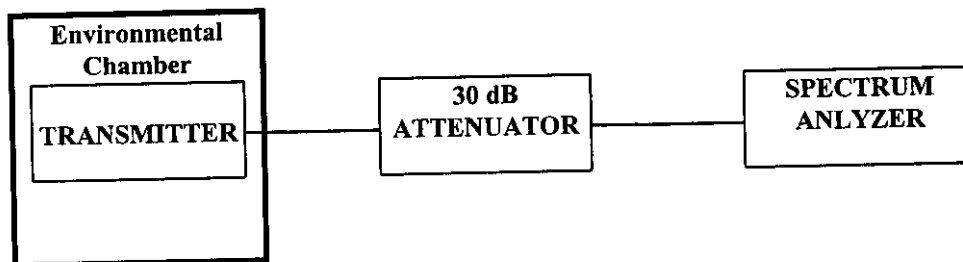

TEST RESULTS: Conforms.

TEST PERSONNEL: Hung Trinh, EMI/RFI Technician

DATE: May 19, 1999

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT
July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

MEASUREMENT DATA

FREQUENCY STABILITY

TEST CONFIGURATION

- The transmitter was placed inside the environmental chamber, and its output terminal was coupled to the Spectrum Analyzer through a 30 dB attenuator.
- One transmitter channel frequency was tested.
- The DUT was supplied by a variable power supply.
- The environmental chamber was cycled down to -30° C. When the chamber reaches -30° C, the EUT was powered on with the nominal voltage level, with the transmitter keyed off. The terminal remained in the chamber at -30° C for a period of 1 hour. After 1 hour the transmitter was continuously keyed on, at full power. The transmitter frequency of the terminal was measured from the spectrum analyzer every minute for a period of 10 minutes.
- After 10 minutes the variable power supply was adjusted to supply the EUT with voltage of 85% nominal voltage level and measurement was repeated.
- After 10 minutes the variable power supply was adjusted to supply the EUT with voltage of 110% nominal voltage level and measurement was repeated.
- When the measurement complete, the transmitter was keyed off and the chamber was cycled up to the test temperature. The EUT remained powered up (unkeyed) at this temperature for a minimum period of 1 hour, after which the measurements will be made as outlined above.
- The above was repeated for 25 & 50 degrees Celsius.

REMARKS: These tests shall not be applicable for this type of Mobile Radio Translator since the input/output characteristics are identical. However, they are to be performed for our information.

The following frequency deviations observed are just the characteristics of RF input source or measuring instrument.

Product Name Model No.	VHF CHANNEL MODULE (MOBILE RADIO TRANSLATOR) MODEL NO.: CM VHF HP
Centre Frequency	150 MHz
Full Power Level	43.2 dBm
Frequency Tolerance Limit	± 1.0 ppm or ±150 Hz
Max. Frequency Tolerance Measured	- 0.5 ppm or 82 Hz
Base/Mobile/Portable	-30 to +50 degree C, 85% to 115%

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT
July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

		CENTRE FREQUENCY & RF POWER OUTPUT VARIATION					
AMBIENT TEMP. (°C)	KEYED-ON TIME (Minutes)	Supply Voltage (Nominal) 13.8Vdc		Supply Voltage (85% of Nominal) 11.7 Vdc		Supply Voltage (115% of Nominal) 15.9Vdc	
		Hz	dB	Hz	dB	Hz	dB
-30	0	-57	N/A	N/A	N/A	N/A	N/A
	1	-49	N/A	N/A	N/A	N/A	N/A
	2	-53	N/A	N/A	N/A	N/A	N/A
	3	-52	N/A	N/A	N/A	N/A	N/A
	4	-53	N/A	N/A	N/A	N/A	N/A
	5	-56	N/A	N/A	N/A	N/A	N/A
	6	-50	N/A	N/A	N/A	N/A	N/A
	7	-56	N/A	N/A	N/A	N/A	N/A
	8	-57	N/A	N/A	N/A	N/A	N/A
	9	-52	N/A	N/A	N/A	N/A	N/A
	10	-55	N/A	N/A	N/A	N/A	N/A
-20	0	-82	N/A	N/A	N/A	N/A	N/A
	1	-66	N/A	N/A	N/A	N/A	N/A
	2	-80	N/A	N/A	N/A	N/A	N/A
	3	-73	N/A	N/A	N/A	N/A	N/A
	4	-76	N/A	N/A	N/A	N/A	N/A
	5	-74	N/A	N/A	N/A	N/A	N/A
	6	-80	N/A	N/A	N/A	N/A	N/A
	7	-74	N/A	N/A	N/A	N/A	N/A
	8	-67	N/A	N/A	N/A	N/A	N/A
	9	-76	N/A	N/A	N/A	N/A	N/A
	10	-68	N/A	N/A	N/A	N/A	N/A
-10	0	-77	N/A	N/A	N/A	N/A	N/A
	1	-76	N/A	N/A	N/A	N/A	N/A
	2	-73	N/A	N/A	N/A	N/A	N/A
	3	-69	N/A	N/A	N/A	N/A	N/A
	4	-76	N/A	N/A	N/A	N/A	N/A
	5	-70	N/A	N/A	N/A	N/A	N/A
	6	-73	N/A	N/A	N/A	N/A	N/A
	7	-73	N/A	N/A	N/A	N/A	N/A
	8	-70	N/A	N/A	N/A	N/A	N/A
	9	-74	N/A	N/A	N/A	N/A	N/A
	10	-72	N/A	N/A	N/A	N/A	N/A
0	0	-73	N/A	N/A	N/A	N/A	N/A
	1	-69	N/A	N/A	N/A	N/A	N/A
	2	-74	N/A	N/A	N/A	N/A	N/A
	3	-79	N/A	N/A	N/A	N/A	N/A
	4	-73	N/A	N/A	N/A	N/A	N/A
	5	-76	N/A	N/A	N/A	N/A	N/A
	6	-82	N/A	N/A	N/A	N/A	N/A
	7	-72	N/A	N/A	N/A	N/A	N/A
	8	-72	N/A	N/A	N/A	N/A	N/A
	9	-79	N/A	N/A	N/A	N/A	N/A
	10	-80	N/A	N/A	N/A	N/A	N/A

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT

July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

AMBIENT TEMP. (°C)	KEYED-ON TIME (Minutes)	CENTRE FREQUENCY & RF POWER OUTPUT VARIATION					
		Supply Voltage (Nominal) 13.8Vdc		Supply Voltage (85% of Nominal) 11.7 Vdc		Supply Voltage (115% of Nominal) 15.9Vdc	
		Hz	dB	Hz	DB	Hz	dB
+10	0	-56	N/A	N/A	N/A	N/A	N/A
	1	-64	N/A	N/A	N/A	N/A	N/A
	2	-60	N/A	N/A	N/A	N/A	N/A
	3	-70	N/A	N/A	N/A	N/A	N/A
	4	-63	N/A	N/A	N/A	N/A	N/A
	5	-60	N/A	N/A	N/A	N/A	N/A
	6	-64	N/A	N/A	N/A	N/A	N/A
	7	-62	N/A	N/A	N/A	N/A	N/A
	8	-66	N/A	N/A	N/A	N/A	N/A
	9	-64	N/A	N/A	N/A	N/A	N/A
	10	-61	N/A	N/A	N/A	N/A	N/A
+25	0	-23	0.0	-42	0.0	-54	20.0
	1	-23	0.0	-42	0.0	-54	20.0
	2	-23	0.0	-42	0.0	-54	20.0
	3	-23	0.0	-42	0.0	-54	20.0
	4	-23	0.0	-42	0.0	-54	20.0
	5	-23	0.0	-42	16.9	-54	20.0
	6	-23	0.0	-42	16.9	-54	20.0
	7	-23	0.0	-42	16.9	-54	20.0
	8	-23	0.0	-42	16.9	-54	20.0
	9	-23	0.0	-42	16.9	-54	20.0
	10	-23	0.0	-42	16.9	-54	20.0
30	0	-50	N/A	N/A	N/A	N/A	N/A
	1	-54	N/A	N/A	N/A	N/A	N/A
	2	-56	N/A	N/A	N/A	N/A	N/A
	3	-60	N/A	N/A	N/A	N/A	N/A
	4	-52	N/A	N/A	N/A	N/A	N/A
	5	-54	N/A	N/A	N/A	N/A	N/A
	6	-54	N/A	N/A	N/A	N/A	N/A
	7	-57	N/A	N/A	N/A	N/A	N/A
	8	-59	N/A	N/A	N/A	N/A	N/A
	9	-63	N/A	N/A	N/A	N/A	N/A
	10	-53	N/A	N/A	N/A	N/A	N/A
+40	0	-62	N/A	N/A	N/A	N/A	N/A
	1	-60	N/A	N/A	N/A	N/A	N/A
	2	-56	N/A	N/A	N/A	N/A	N/A
	3	-57	N/A	N/A	N/A	N/A	N/A
	4	-57	N/A	N/A	N/A	N/A	N/A
	5	-59	N/A	N/A	N/A	N/A	N/A
	6	-62	N/A	N/A	N/A	N/A	N/A
	7	-53	N/A	N/A	N/A	N/A	N/A
	8	-54	N/A	N/A	N/A	N/A	N/A
	9	-54	N/A	N/A	N/A	N/A	N/A
	10	-55	N/A	N/A	N/A	N/A	N/A

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT
July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

CENTRE FREQUENCY & RF POWER OUTPUT VARIATION							
AMBIENT TEMP. (°C)	KEYED-ON TIME (Minutes)	Supply Voltage (Nominal) 13.8Vdc		Supply Voltage (85% of Nominal) 11.7 Vdc		Supply Voltage (115% of Nominal) 15.9Vdc	
		Hz	dB	Hz	dB	Hz	dB
+50	0	-56	N/A	N/A	N/A	N/A	N/A
	1	-52	N/A	N/A	N/A	N/A	N/A
	2	-56	N/A	N/A	N/A	N/A	N/A
	3	-50	N/A	N/A	N/A	N/A	N/A
	4	-57	N/A	N/A	N/A	N/A	N/A
	5	-54	N/A	N/A	N/A	N/A	N/A
	6	-57	N/A	N/A	N/A	N/A	N/A
	7	-60	N/A	N/A	N/A	N/A	N/A
	8	-63	N/A	N/A	N/A	N/A	N/A
	9	-60	N/A	N/A	N/A	N/A	N/A
	10	-62	N/A	N/A	N/A	N/A	N/A
+60	0	-72	N/A	N/A	N/A	N/A	N/A
	1	-60	N/A	N/A	N/A	N/A	N/A
	2	-70	N/A	N/A	N/A	N/A	N/A
	3	-66	N/A	N/A	N/A	N/A	N/A
	4	-60	N/A	N/A	N/A	N/A	N/A
	5	-62	N/A	N/A	N/A	N/A	N/A
	6	-62	N/A	N/A	N/A	N/A	N/A
	7	-64	N/A	N/A	N/A	N/A	N/A
	8	-64	N/A	N/A	N/A	N/A	N/A
	9	-60	N/A	N/A	N/A	N/A	N/A
	10	-60	N/A	N/A	N/A	N/A	N/A

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT

July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

4.3 MODULATION LIMITING @ FCC 90.210

PRODUCT NAME: VHF CHANNEL MODULE (MOBILE RADIO TRANSLATOR),
Model No.: CM VHF HP

FCC REQUIREMENTS:

FCC Part 2, Sub. J, Para. 2.987(b) & FCC Part 90, Subpart I, Para. 90.210

The EUT shall be installed with a modulation limiter which limits the deviation of the FM carrier less than manufacturer's setting provided that the rf output spectrum must meet the required MASK (recommended: 1.25 kHz for 7.5 kHz Channel Spacing System, 2.5 kHz for 12.5 kHz Channel Spacing, and 5 kHz for 25 kHz Channel Spacing System).

CLIMATE CONDITION:

Standard Temperature and Humidity:

- Ambient temperature: 21 °C
- Relative humidity: 43%

POWER INPUT:

13.8 Vdc Battery.

TEST EQUIPMENT:


- Communication Analyzer, Rohde & Schawrz, Model SMFO2, S/N: 879988/057, 0.4 - 1000 MHz including AF & RF Signal Generators, SINAD, DISTORTION, DEVIATION meters and etc...

METHOD OF MEASUREMENTS:

For Audio Transmitter:- The carrier frequency deviation was measured with the tone input signal level varied from 0 Vp to audio input rating level plus 16 dB at frequencies 0.1, 0.5, 1.0, 3.0 and 5.0 kHz. The maximum deviation was recorded at each test condition.

For Data Transmitter with Maximum Frequency Deviation set by Factory:- The EUT was set at maximum frequency deviation, and its peak frequency deviation was then measured using EUT's internal random data source.

TEST ARRANGEMENT

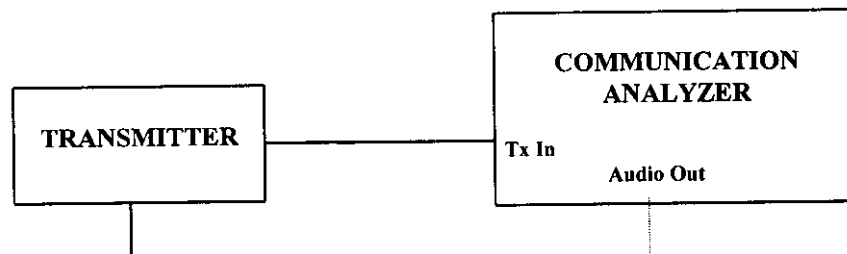

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT
July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

TEST RESULTS: Conforms.

TEST PERSONNEL: Tri M. Luu, P.Eng.

DATE: May 17, 1999

MEASUREMENT DATA

Note: The Futurecom CM VHF HP VHF CHANNEL MODULE is a rf translator, it transforms the rf input signal to the rf output signal with the same spectrum but the frequency and power. Therefore, comparison tests between the input and output signal will be performed.

MODULATION LIMITING FOR DATA TRANSMITTER

Data Rate	Frequency Deviation Of Input Signal (kHz)	Frequency Deviation Of Output Signal (kHz)
9600 b/s random data	0.7	0.7
9600 b/s random data	1.2	1.2
9600 b/s random data	1.7	1.7
9600 b/s random data	2.2	2.2
9600 b/s random data	2.7	2.7
9600 b/s random data	3.2	3.2

MODULATION LIMITING FOR AN AUDIO TRANSMITTER

Modulating Signal	Frequency Deviation Of Input Signal (kHz)	Frequency Deviation Of Output Signal (kHz)
1 KHz, Sine Wave	0.7	0.7
1 KHz, Sine Wave	1.2	1.2
1 KHz, Sine Wave	1.7	1.7
1 KHz, Sine Wave	2.2	2.2
1 KHz, Sine Wave	2.7	2.7
1 KHz, Sine Wave	3.2	3.2

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 8G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT

July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

4.4 EMISSION MASKS @ FCC 90.210

PRODUCT NAME: VHF CHANNEL MODULE (MOBILE RADIO TRANSLATOR),
Model No.: CM VHF HP

FCC REQUIREMENTS:

FCC Part 90, Sub. I, Para. 90.210

Emissions shall be attenuated below the mean output power of the transmitter as follows:

FREQUENCY RANGE (MHz)	Recommended OBW (KHz)	CHANNEL SPACING (KHz)	Recommended FREQ. DEVIATION (KHz)	FCC APPLICABLE MASK
150 – 174	20	25.0	5.0	90.210(d): Mask B – Voice & 90.210(c): Mask C - Data
150 – 174	11.25	12.5	2.5	90.210(d): Mask D – Voice & Data
150 – 174	6	7.5	1.25	90.210(e): Mask E – Voice & Data

CLIMATE CONDITION:

Standard Temperature and Humidity:

- Ambient temperature: 21 °C
- Relative humidity: 43%

POWER INPUT:

13.8 Vdc Battery.

TEST EQUIPMENT:

- Advantest Spectrum Analyzer, Model R3271, S/N: 15050203
- Bird Attenuator, 50 Ohm IN/OUT
- Audio Oscillator, HP, Model 204C, SN: 0989A08798, Output: 0-1.2 MHz, 5 Vrms.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT
July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

METHOD OF MEASUREMENTS:


FCC CFR 47, Para. 2.989 - Out-of-Band Emissions:

The Emission Masks was measured with the Spectrum Analyzer controls set as shown on the test results (RBW $\geq$ 300 Hz, VBW $\geq$ 300 Hz and SWEEP TIME = AUTO). The transmitter was operated at a full rated power output, and modulated as follows:

Voice or Digital Modulation Through a Voice Input Port @ 2.989(c)(1):- The transmitter was modulated by a 2.5 KHz tone signal at an input level 16 dB greater than that required to produce 50% modulation (e.g.: ± 2.5 KHz peak deviation at 1 KHz modulating frequency). The input level was established at the frequency of maximum response of the audio modulating circuit.

Digital Modulation Through a Data Input Port @ 2.989(h):- Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the Emission Masks shall be shown for operation with any devices used for modifying the spectrum when such devices are operational at the discretion of the user.

TEST ARRANGEMENT



TEST RESULTS: Conforms.

TEST PERSONNEL: Hung Trinh, EMI/RFI Technician

DATE: May 17-19, 1999

MEASUREMENT DATA

Please see attached plots for detailed measurements.

Note: *The Futurecom CM VHF HP VHF CHANNEL MODULE is a rf translator, it transforms the rf input signal to the rf output signal with the same spectrum but the frequency and power. Therefore, comparison tests between the input and output signal will be performed.*

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT
July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



FUTURECOM SYSTEMS GROUP INC.

CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVHFHP

Tx Freq: 159.99985 MHz, Measured RF Output @ Antenna: 0.3 Watts
Modulation: RF IN at max. level of 0 dBm @ 160 MHz. FM modulated with an external 9600 b/s random data, Freq. Dev.: ±0.3 kHz

Date: May 19, 1999
Tested by: Hung Trinh

AVERAGE BANDWIDTH
1000 Hz


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 159.99985 MHz
- .38 dBm

NO USER

Menu

RF IN SIGNAL FITTED IN THE MASK E FOR 7.5 KHZ CHANNEL SPACING

LOG REF 9.5 dBm

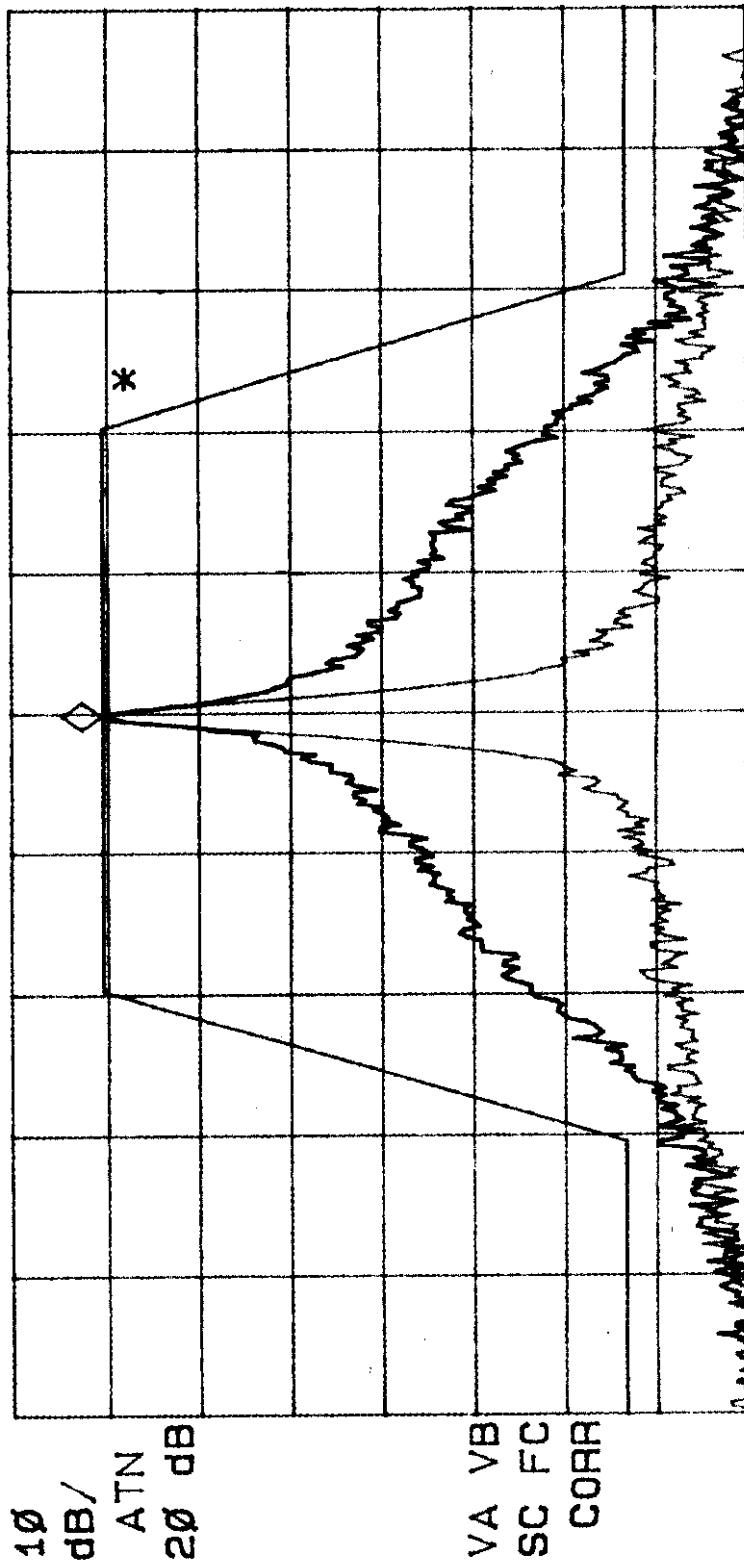

CENTER 159.99989 MHz

#IF BW 1000 Hz

#AVG BW 1000 Hz

SPAN 15.00 KHz

SWP 4.50 sec



UltraTech
Engineering Labs Inc.

FUTURECOM SYSTEMS GROUP INC.

CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVIFHP

Tx Freq.: 173.99985 MHz, Measured RF Output @ Antenna: 42.55 Watts

Modulation: RF IN at max. level of 0 dBm @ 160 MHz, FMI modulated with an external 9600 b/s random data, Freq. Dev.: ± 0.3 kHz

Date: May 19, 1999
Tested by: Hung Trinh

AVERAGE BANDWIDTH

1000 Hz

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

MKR 173.99985 MHz


42.55 dBm

No user

Menu

REF OFFST 30.0 dB

REF 52.5 dBm MASK $\pm$ RF OUT (7.5 kHz CHANNEL SPACING)

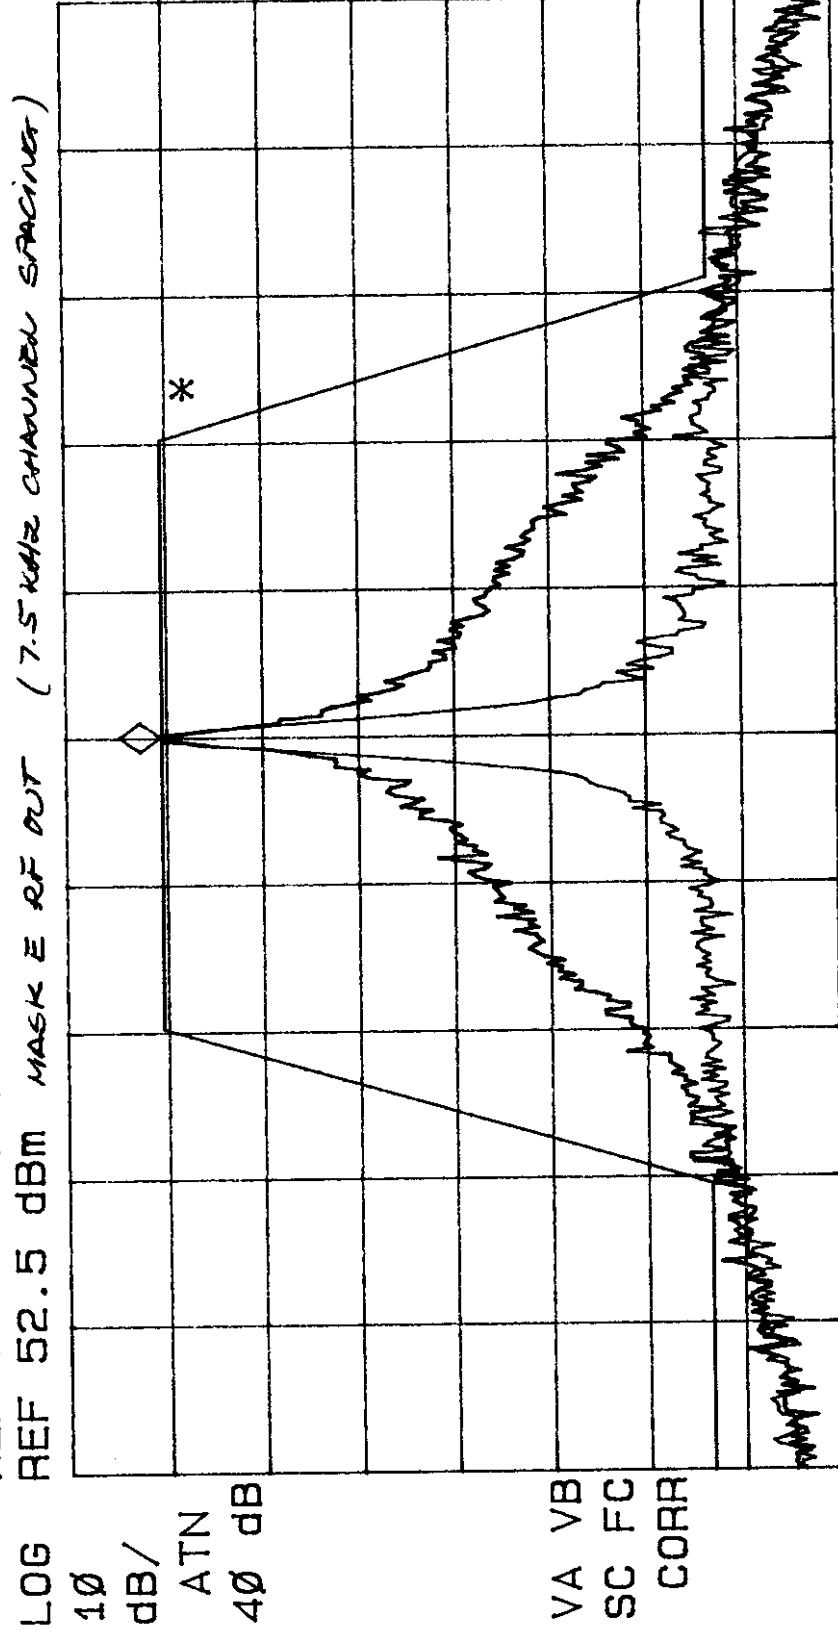

CENTER 173.99985 MHz

#IF BW 1000 Hz

#AVG BW 1000 Hz

SPAN 15.00 kHz

SWP 4.50 sec



UltraTech
Engineering Labs Inc.

FUTURECOM SYSTEMS GROUP INC.

CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVHFHP

Tx Freq.: 162 MHz, Measured RF Output @ Antenna: Watts


Modulation: RF IN at max. level of 0 dBm @ 160 MHz, FM modulated with an external 9600 b/s random data, Freq. Dev.: ± 0.3 kHz

Date: May 19, 1999
Tested by: Hung Trinh

ACTV DET: PEAK
MEAS DET: PEAK QP AVG

MKR 161.99984 MHz
41.65 dBm

No user
Menu

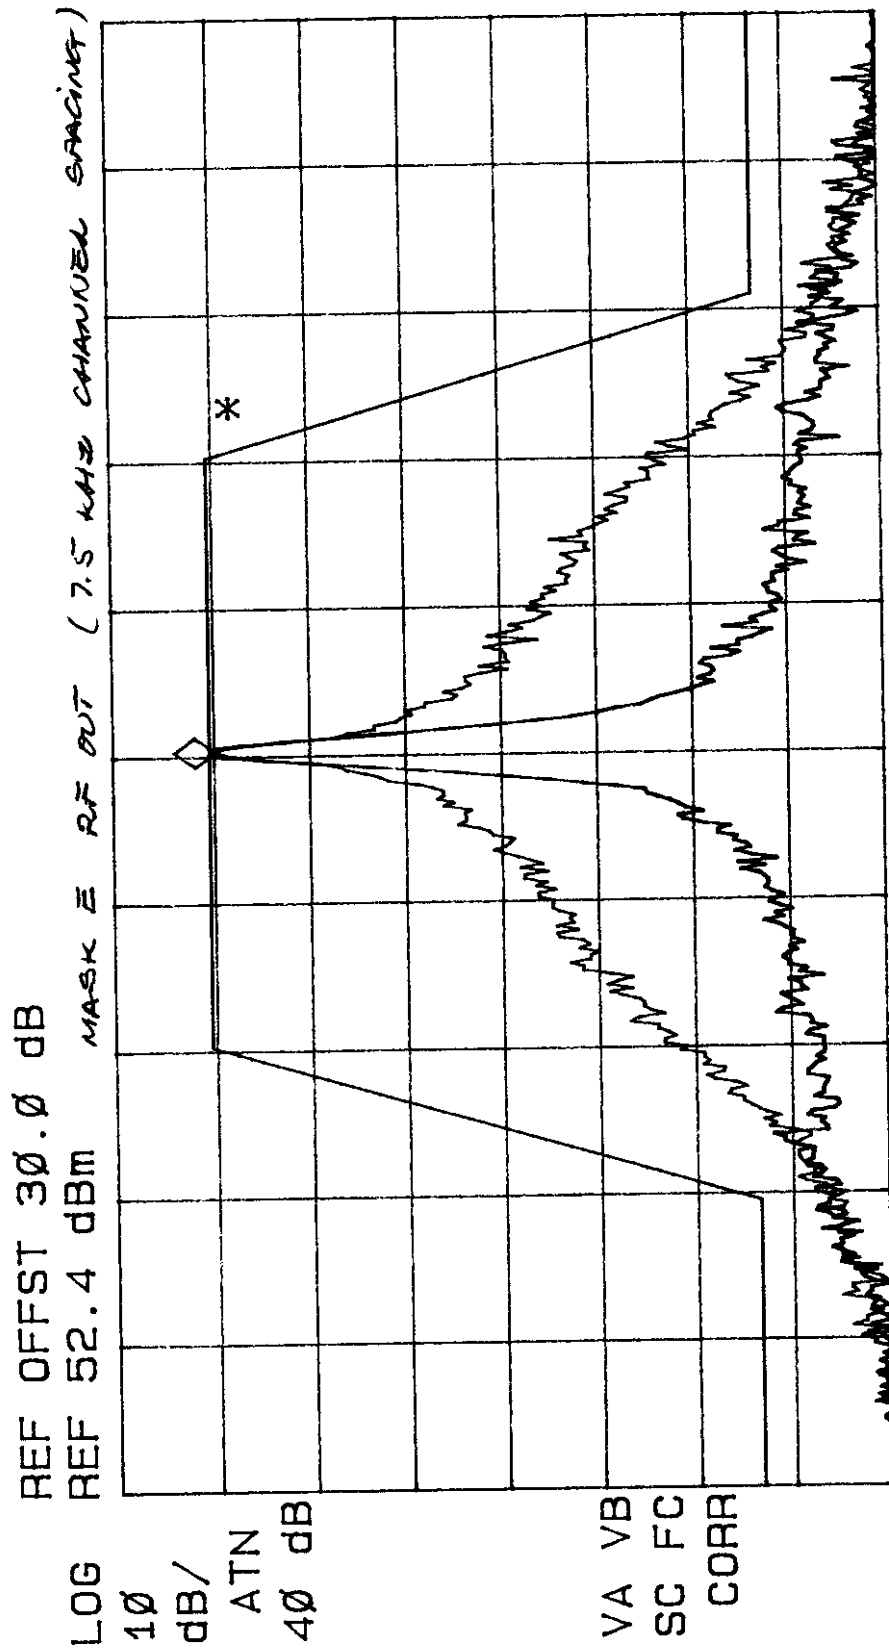



FUTURECOM SYSTEMS GROUP INC.

CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVIF1P

Tx Freq.: 150 MHz, Measured RF Output @ Antenna: Watts
 Modulation: RF IN at max. level of 0 dBm @ 160 MHz, FIM modulated with 2.5 kHz ~~1000 b/s~~ WAVE
 Signal Freq. Dev.: ±0.3 kHz ~~generator data~~


Date: May 19, 1999
 Tested by: Hung Trinh

AVERAGE BANDWIDTH
 1000 Hz

ACTV DET: PEAK No user
 MEAS DET: PEAK QP AVG Menu

MKR 149.99985 MHz
 42.25 dBm

REF OFFST 30.0 dB
 REF 52.2 dBm MASK E RF OUT (7.5 kHz CHANNEL SPACING)

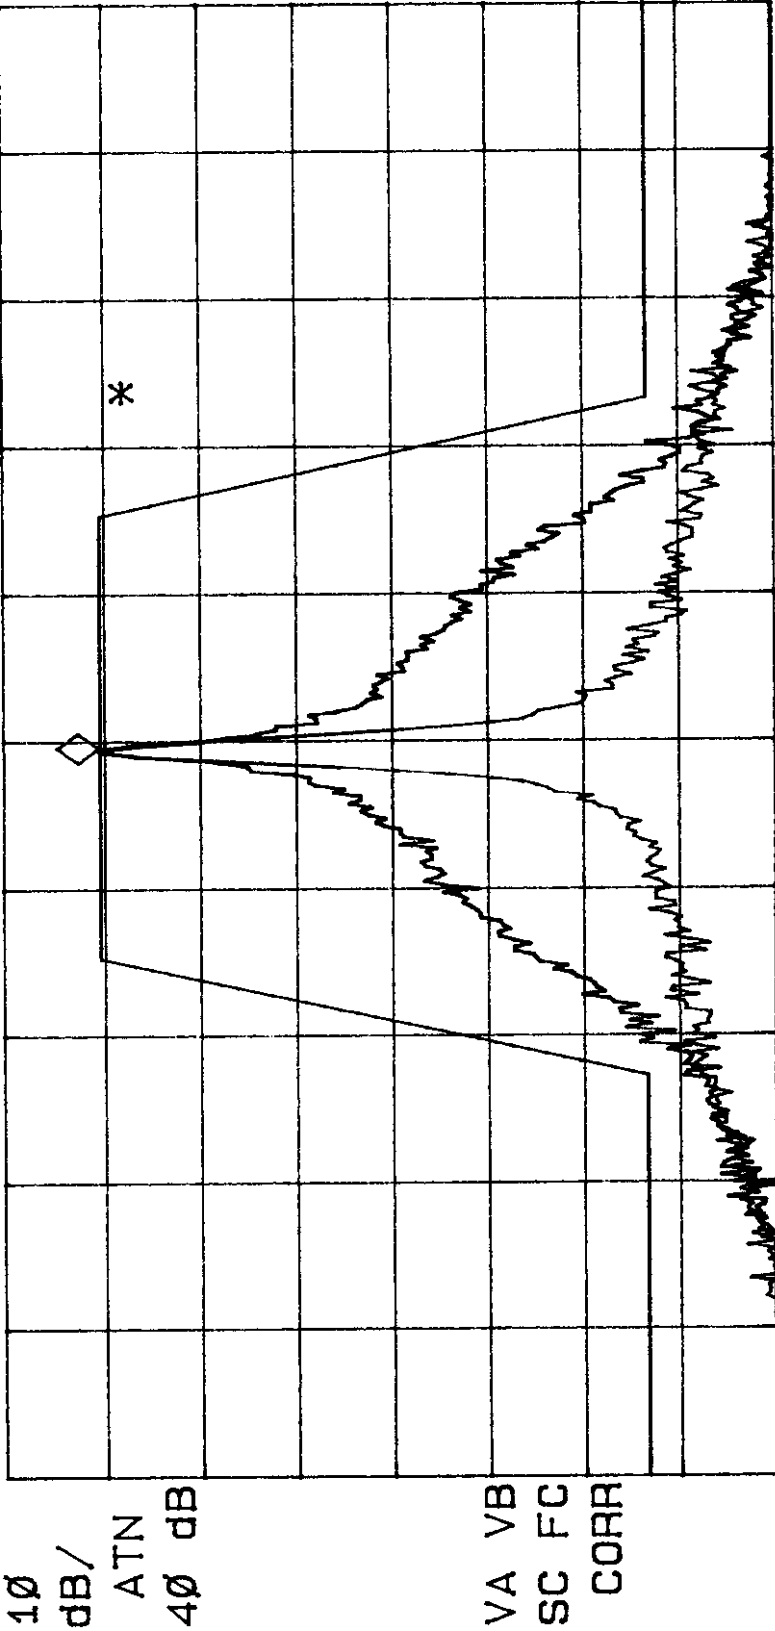

CENTER 149.99995 MHz SPAN 20.00 KHz
 #IF BW 1000 Hz #AVG BW 1000 Hz SWP 6.00 sec



FUTURECOM SYSTEMS GROUP INC.

CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVHFHP

Tx Freq.: 159.99990 MHz, Measured RF Output @ Antenna: 10.3 Watts
Modulation: RF IN at max. level of 0 dBm @ 160 MHz, FM modulated with 2.5 kHz Sine Wave
Signal, Freq. Dev.: ±0.3 kHz

Date: May 19, 1999
Tested by: Hung Trinh


REF LEVEL
9.6 dBm

ACTV DET: PEAK
MEAS DET: PEAK QP AVG

No user
Menu

MKR 159.99990 MHz
- .45 dBm

RF IN SIGNAL FITTED IN THE MASK E FOR 7.5 KHZ CHANNEL SPACING

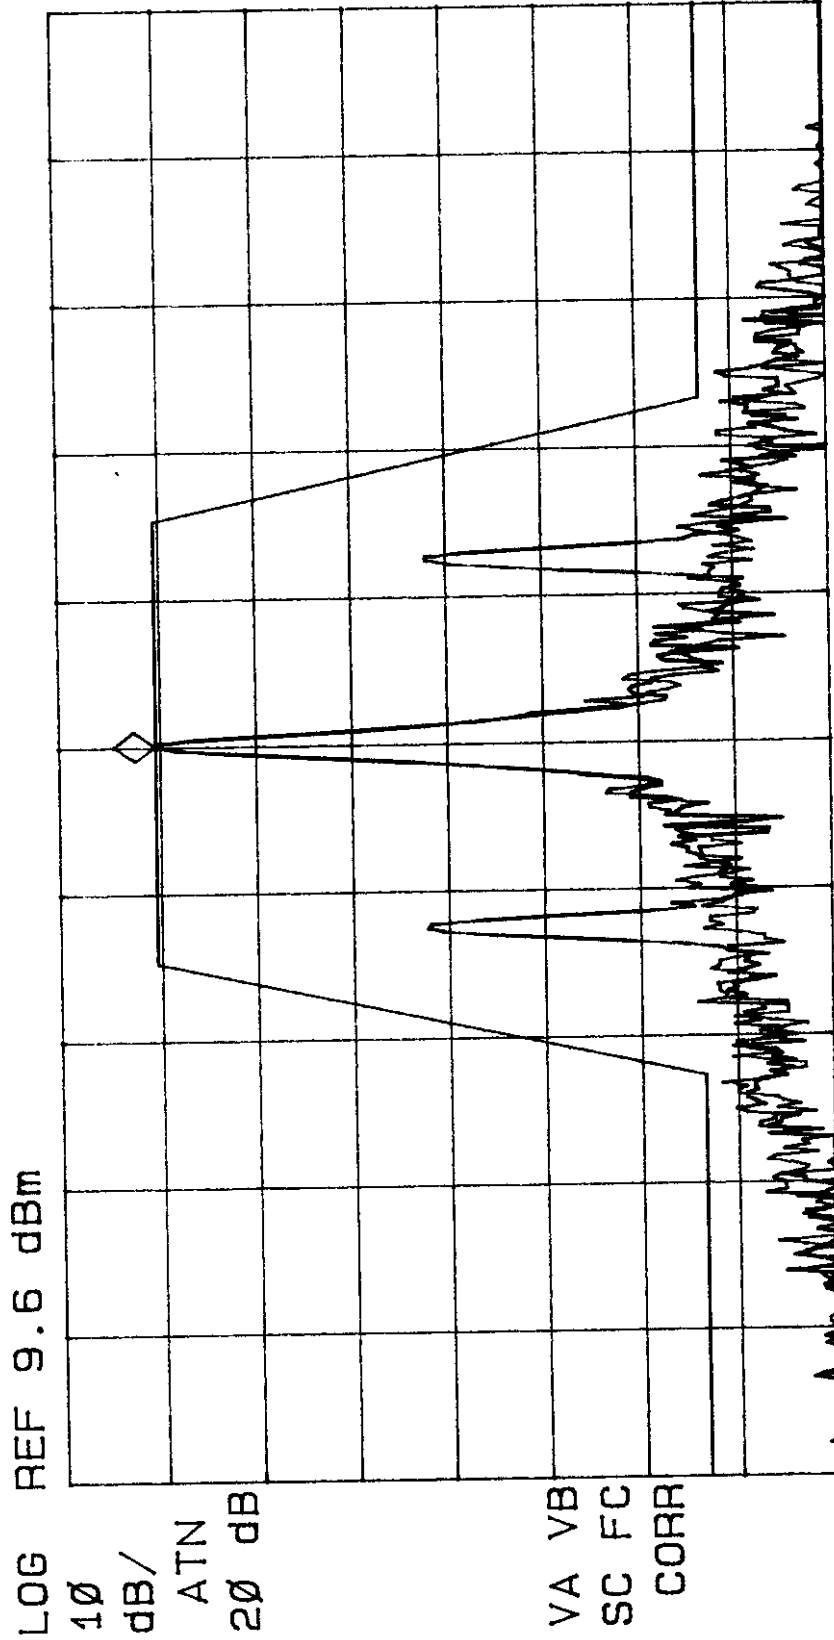

CENTER 159.99990 MHz
#IF BW 1000 Hz
SPAN 20000 kHz
SWP 6000 sec



UltraTech
Engineering Labs Inc.

FUTURECOM SYSTEMS GROUP INC.

CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVHFHP

Tx Freq.: 152 MHz, Measured RF Output @ Antenna: Watts

Modulation: RF IN at max. level of 0 dBm @160 MHz, FM modulated with 2.5 kHz Sine Wave

Signal, Freq. Dev.: 2.5 kHz

Date: May 19, 1999
Tested by: Hung Trinh

AVERAGE BANDWIDTH
100 Hz


ACTV DET: PEAK
MEAS DET: PEAK QP AVG

No user
Menu

MKR 149.99980 MHz
42.70 dBm

REF OFFST 30.0 dB
REF 52.9 dBm

MASK = RFOUT (7.5 kHz CHANNEL SPACING)

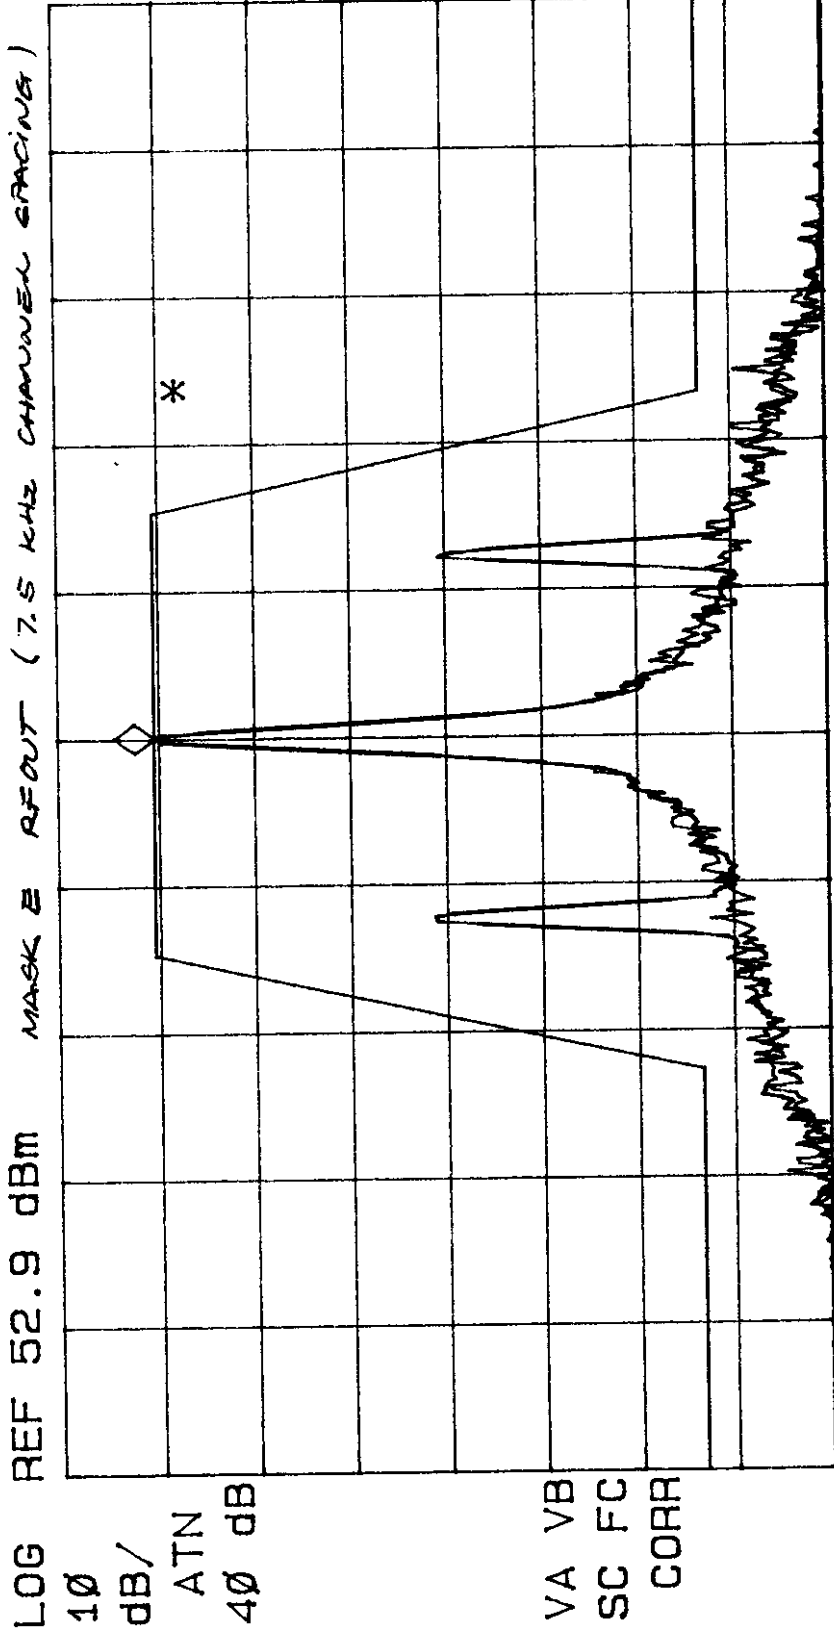

CENTER 149.99980 MHz
#IF BW 100 Hz

SPAN 20.00 KHz
SWP 6.00 sec



UltraTech
Engineering Labs Inc.

FUTURECOM SYSTEMS GROUP INC.

CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVHFHP

Tx Freq.: 161.998 MHz, Measured RF Output @ Antenna: 42.54 Watts

Modulation: RF IN at max. level of 0 dBm @160 MHz, FM modulated with 2.5 kHz Sine Wave

Signal, Freq. Dev.: ±0.2 kHz

Date: May 19, 1999

Tested by: Hung Trinh

AVERAGE BANDWIDTH

1000 Hz

ACTV DET: PEAK

No user

MEAS DET: PEAK QP AVG

Menu


MKR 161.99980 MHz

42.54 dBm

REF OFFST 30.0 dB

LOG REF 52.6 dBm

MASK E RF OUT (7.5 kHz CHANNEL SPACING)

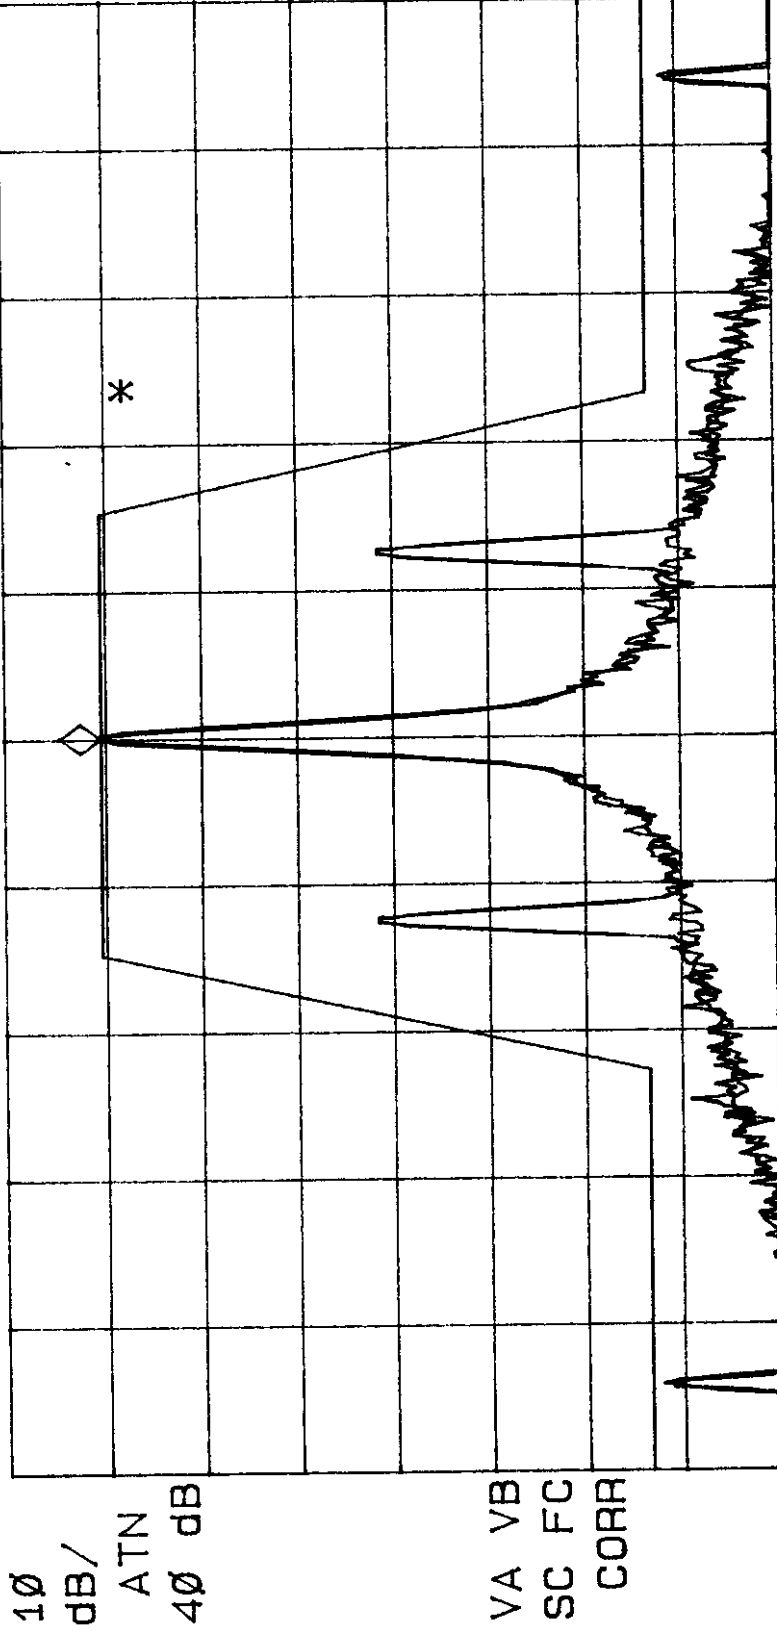

CENTER 161.99980 MHz

#IF BW 1000 Hz

#AVG BW 1000 Hz

SPAN 20.00 kHz

SWP 6.00 sec



UltraTech
Engineering Labs Inc.

FUTURECOM SYSTEMS GROUP INC.

CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVHFHP

Tx Freq.: / 74 MHz, Measured RF Output @ Antenna: Watts

Modulation: RF IN at max. level of 0 dBm @160 MHz, FM modulated with 2.5 kHz Sine Wave

Signal, Freq. Dev.: ±0.20 kHz

Date: May 19, 1999
Tested by: Hung Trinh

AVERAGE BANDWIDTH

100 Hz

ACTV DET: PEAK

No user

MEAS DET: PEAK QP AVG

Menu


MKR 173.99985 MHz

42.77 dBm

REF OFFST 30.0 dB

REF 52.8 dBm

MASK E RF OUT (7.5 kHz Channel Spacing)

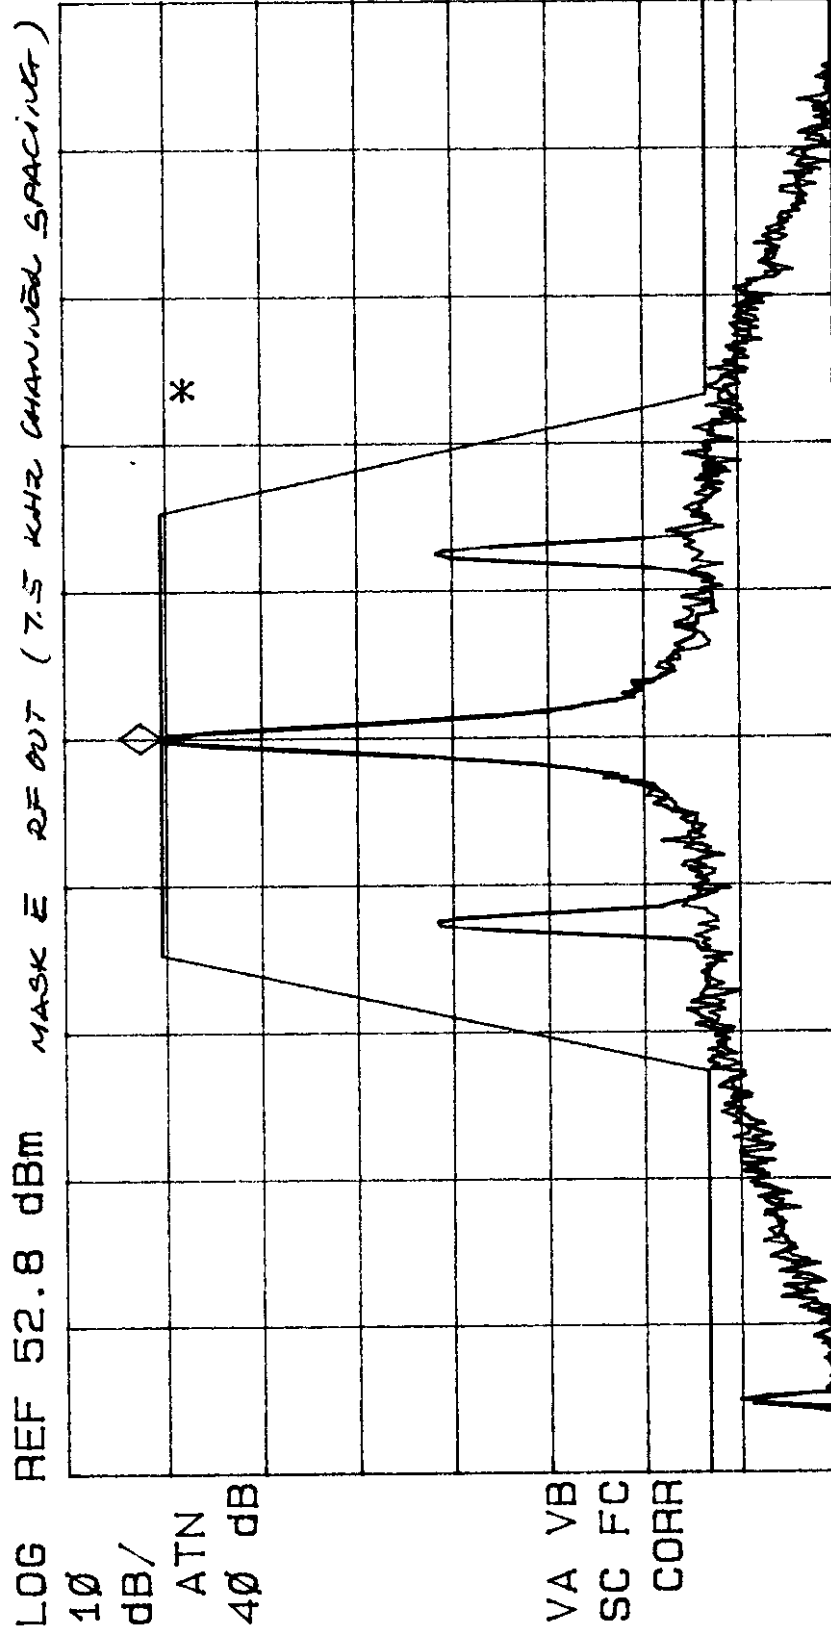

CENTER 173.99985 MHz

#IF BW 100 Hz

#AVG BW 100 Hz

SPAN 20.00 kHz

SWP 6.00 sec



UltraTech
Engineering Labs Inc.

FUTURECOM SYSTEMS GROUP INC.

CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVHFHP

Tx Freq.: 159.99988 MHz, Measured RF Output @ Antenna: 0.25 Watts

Modulation: RF IN at max. level of 0 dBm @ 160 MHz, FM modulated with an external 9600 b/s random data, Freq. Dev.: 25 kHz


Date: May 28, 1999
Tested by: Hung Trinh

REF LEVEL
9.5 dBm

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
Menu

MKR 159.99988 MHz
- .50 dBm

LOG REF 9.5 dBm RF IN SIGNAL FITTED IN THE MASK D FOR 12.5 KHZ CHANNEL SPACING)

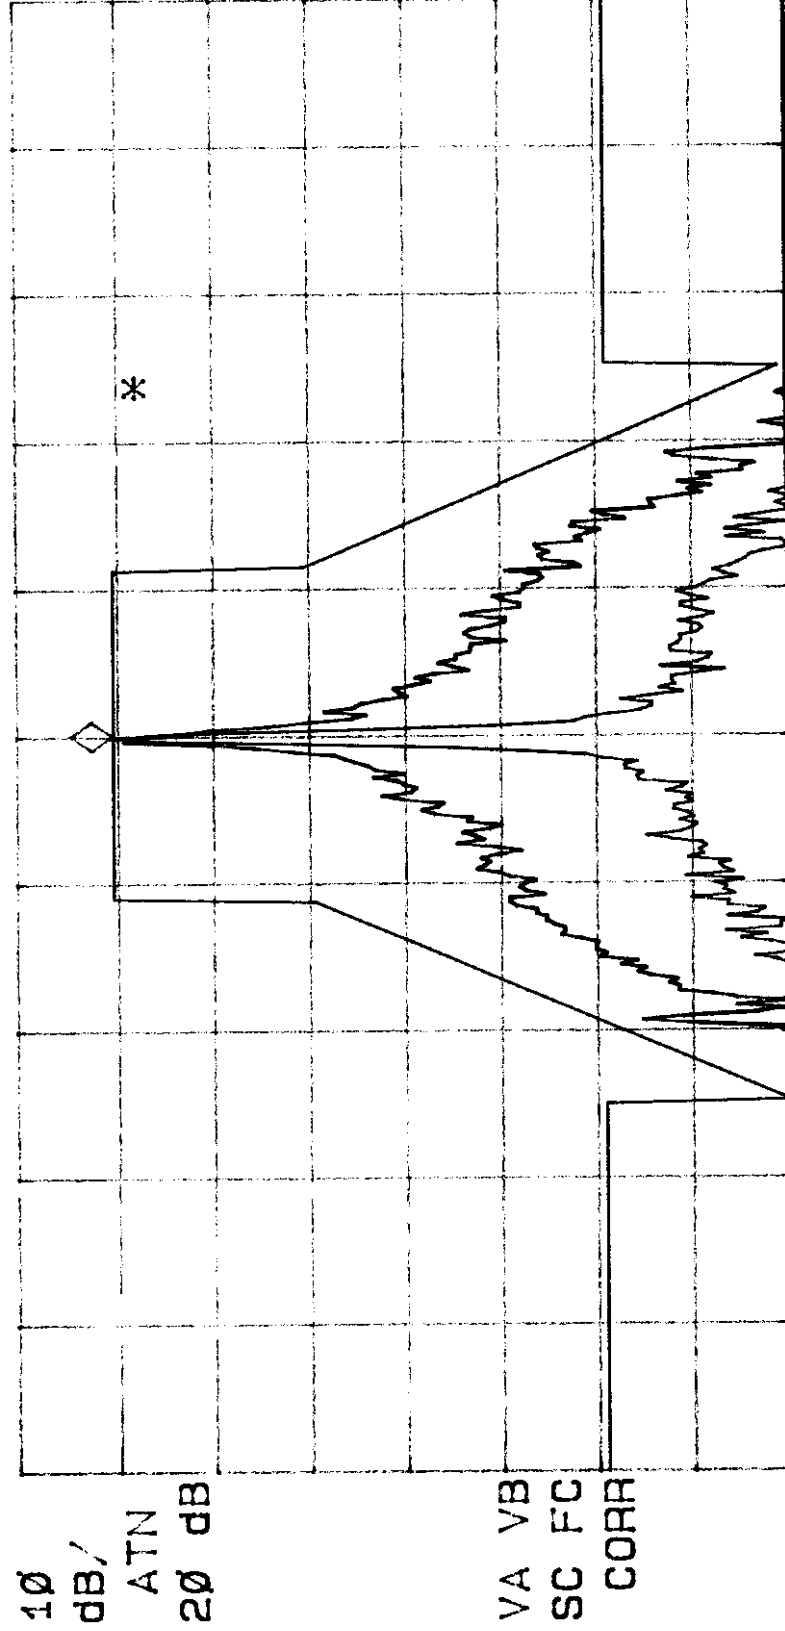

CENTER 159.99988 MHz SPAN 50.00 KHZ
#IF BW 100 HZ #AVG BW 100 HZ SWP 15.0 sec



FUTURECOM SYSTEMS GROUP INC.

CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVIFIP

Tx Freq.: 150 MHz, Measured RF Output @ Antenna: _____ Watts
 Modulation: RF IN at max. level of 0 dBm @ 160 MHz, FM modulated with an external 9600 b/s random data, Freq. Dev.: ± 125 kHz

Date: May 18, 1999
 Tested by: Hung Trinh

REF LEVEL 52.2 dBm

MASK D RF OUT


ACTV DET: PEAK

No user Menu

(12.5 kHz channel spacing) MEAS DET: PEAK QP AVG

MKR 149.99988 MHz
 42.15 dBm

REF OFFST 30.0 dB
 REF 52.2 dBm

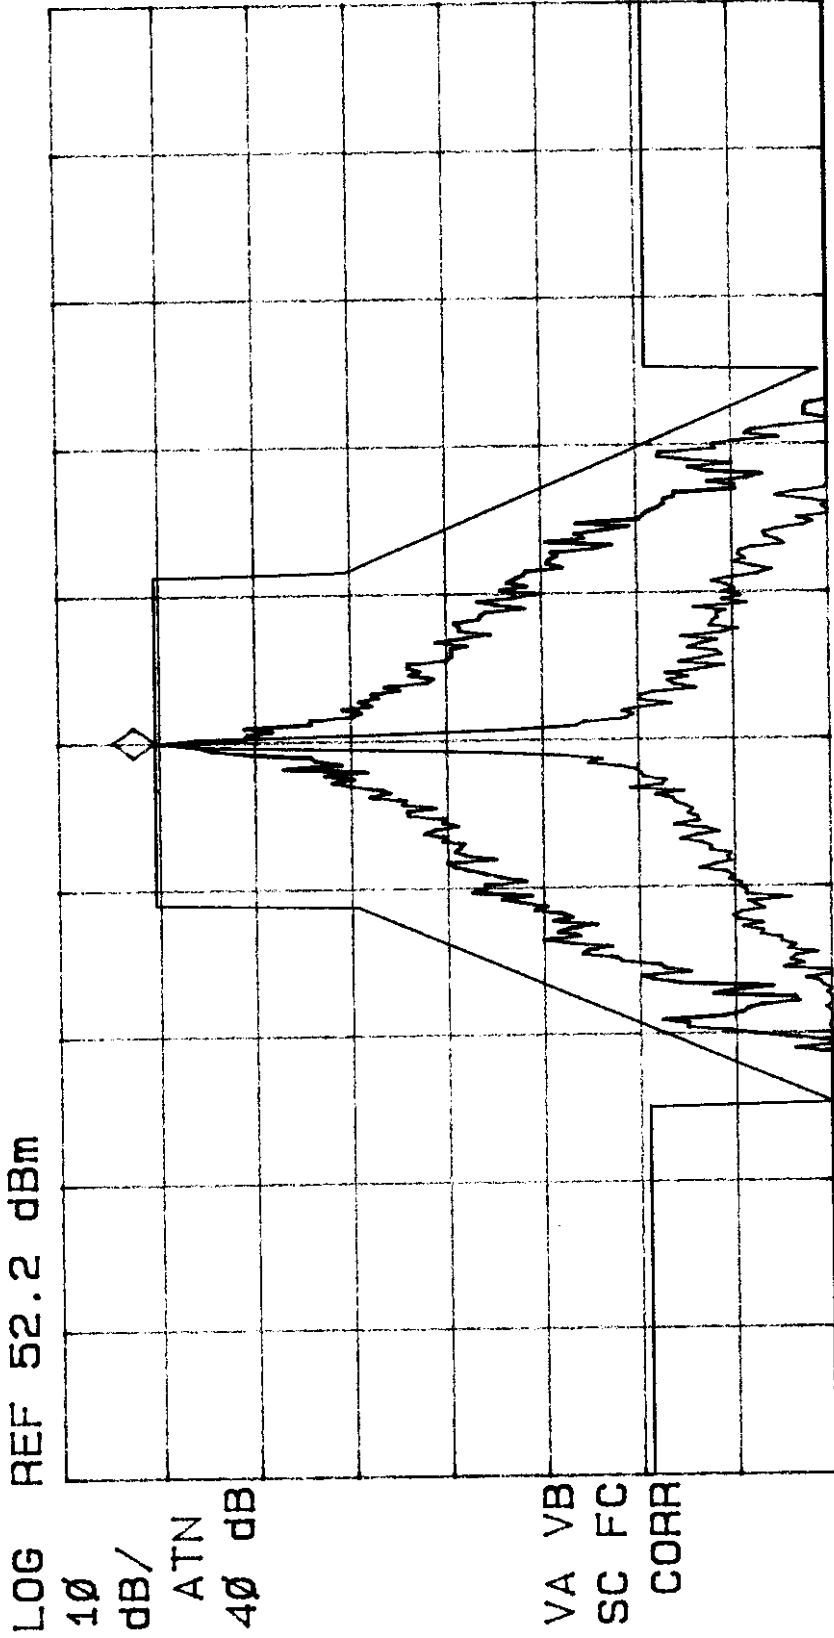

VA VB
 SC FC
 CORR

CENTER 149.99988 MHz SPAN 50.00 KHz
 #IF BW 100 Hz #AVG BW 100 Hz SWP 15.0 sec



UltraTech
Engineering Labs Inc.

FUTURECOM SYSTEMS GROUP INC.

CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVHIFIP

Tx Freq.: 162 MHz, Measured RF Output @ Antenna: Watts

Modulation: RF IN at max. level of 0 dBm @160 MHz, FM modulated with an external 9600 b/s random data, Freq. Dev.: ± 4.85 kHz

Date: May 28, 1999
Tested by: Hung Trinh

MARKER

161.99988 MHz

42.27 dBm

MASK D RF OUT

(12.5 KHZ CHANNEL SPACING)

AGTV DET: PEAK

MEAS DET: PEAK QP AVG

MKR 161.99988 MHz

42.27 dBm

No user

Menu

REF OFFST 30.0 dB

REF 52.3 dBm

LOG

10

dB/


ATN

40 dB

VA VB

SC FC

CORR

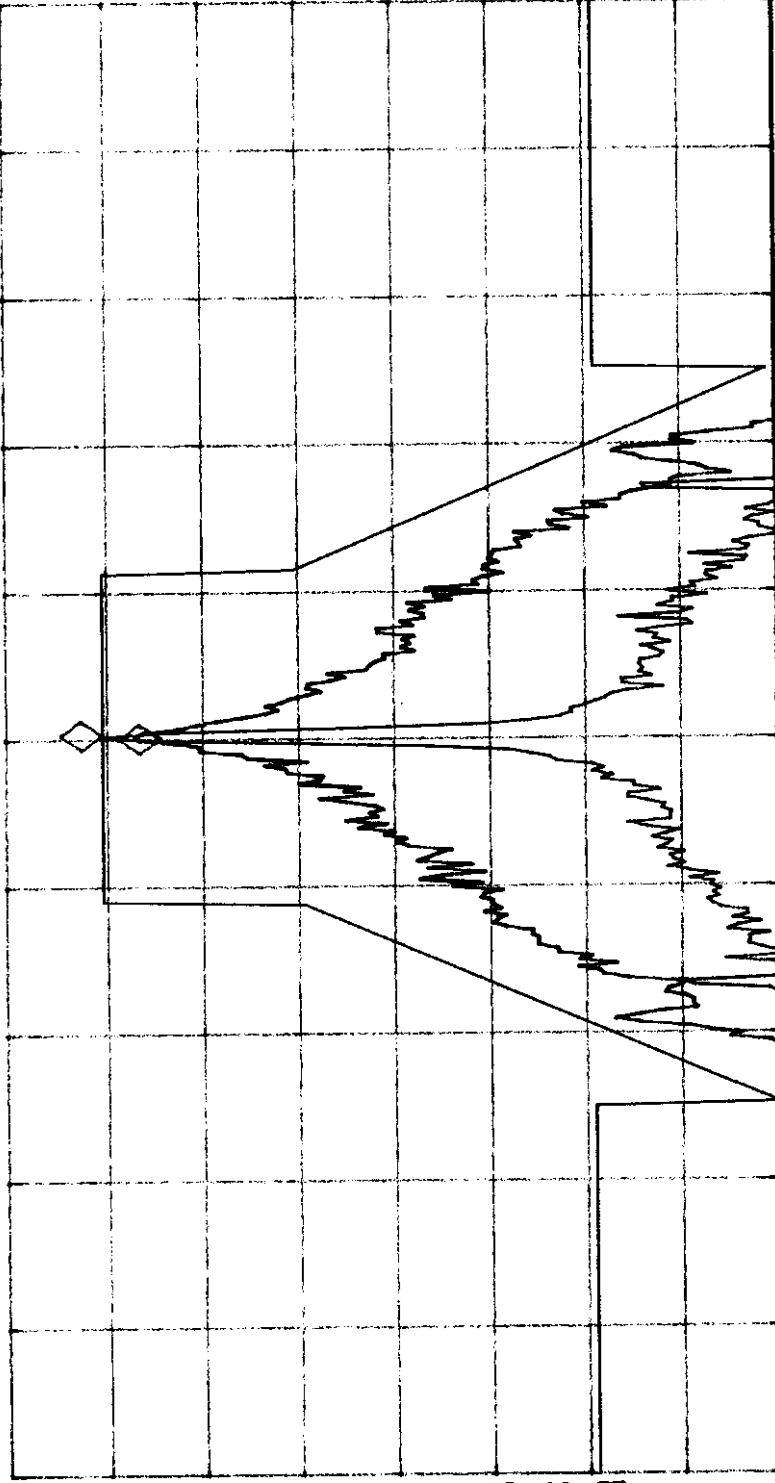

CENTER 161.99975 MHz

#IF BW 100 Hz

#AVG BW 100 Hz

SPAN 50.00 KHz

SWP 15.0 sec



FUTURECOM SYSTEMS GROUP INC.
CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVHFHP

Tx Freq.: 173.99988 MHz, Measured RF Output @ Antenna: 42.52 Watts
Modulation: RF IN at max. level of 0 dBm @160 MHz, FM modulated with an external 9600 b/s random data, Freq. Dev.: 12.5 kHz

Date: May 28, 1999
Tested by: Hung Trinh

REF LEVEL
52.5 dBm

12.5 kHz channel spacing

ACTV DET: PEAK


No user
Menu

MEAS DET: PEAK QP AVG

MKR 173.99988 MHz

42.52 dBm

REF OFFST 30.0 dB
REF 52.5 dBm

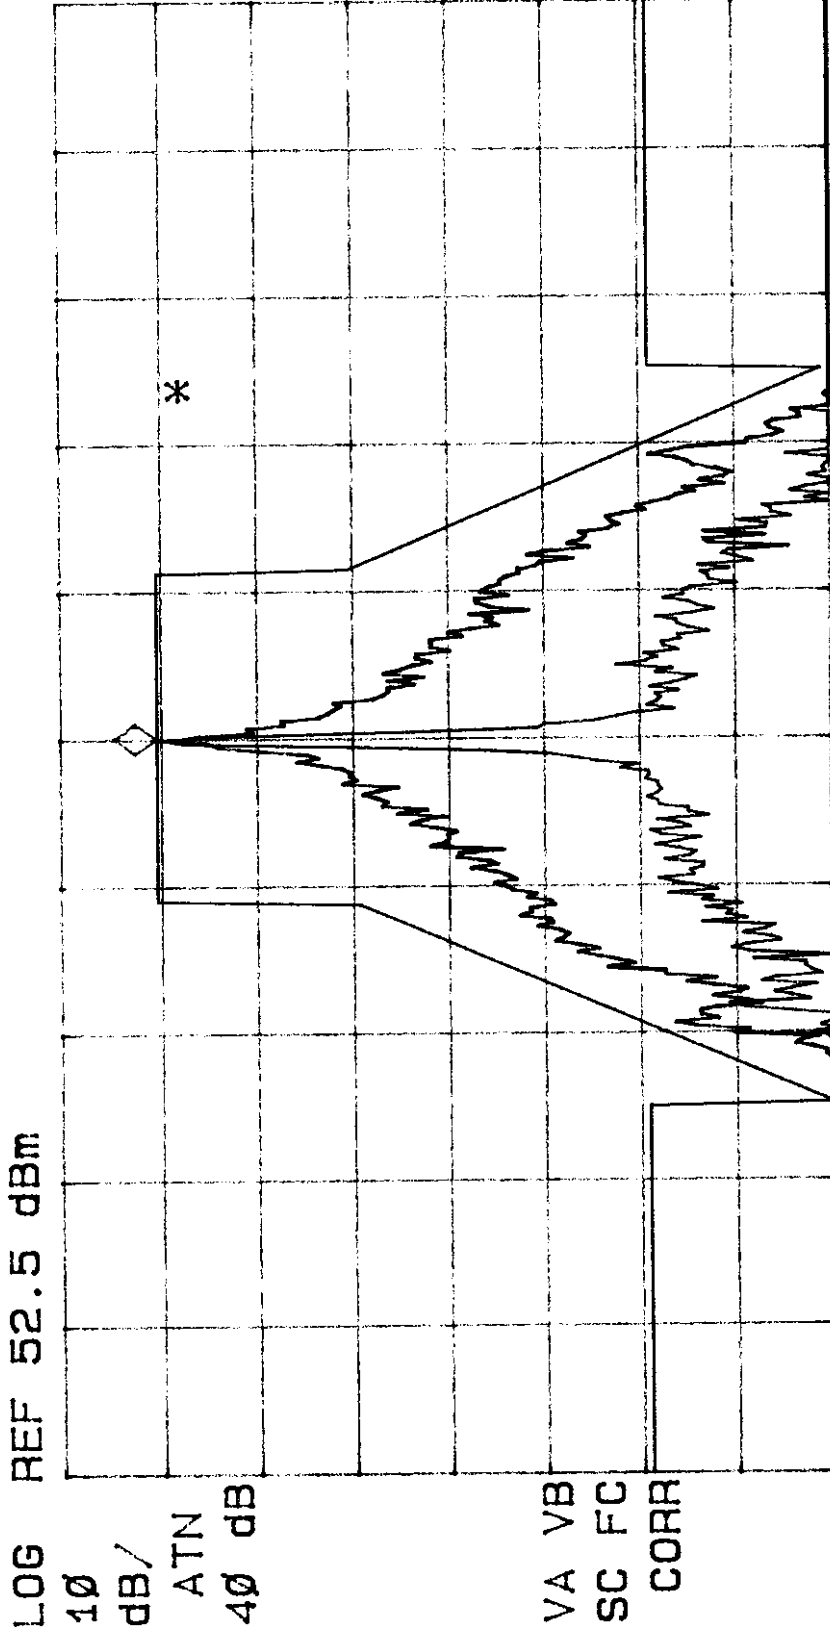

CENTER 173.99988 MHz

#IF BW 100 Hz

#AVG BW 100 Hz

SPAN 50.00 KHz

SWP 15.0 sec



UltraTech
Engineering Labs Inc.

FUTURECOM SYSTEMS GROUP INC.

CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVHFHP

Tx Freq.: 159.9988 MHz, Measured RF Output @ Antenna: 1.0 Watts

Modulation: RF IN at max. level of 0 dBm @160 MHz, FM modulated with 2.5 kHz Sine Wave

Signal, Freq. Dev.: ± 0.00 kHz

Date: May 17, 1999

Tested by: Hung Trinh

hp

RF IN SIGNAL FITTED IN THE MASK D FOR 12.5 KHZ CHANNEL SPACING.

REF LEVEL
9.6 dBm

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
Menu

MKR 159.99988 MHz
- .40 dBm

LOG REF 9.6 dBm

10

dB/


ATN

20 dB

VA VB

SC FC

CORR

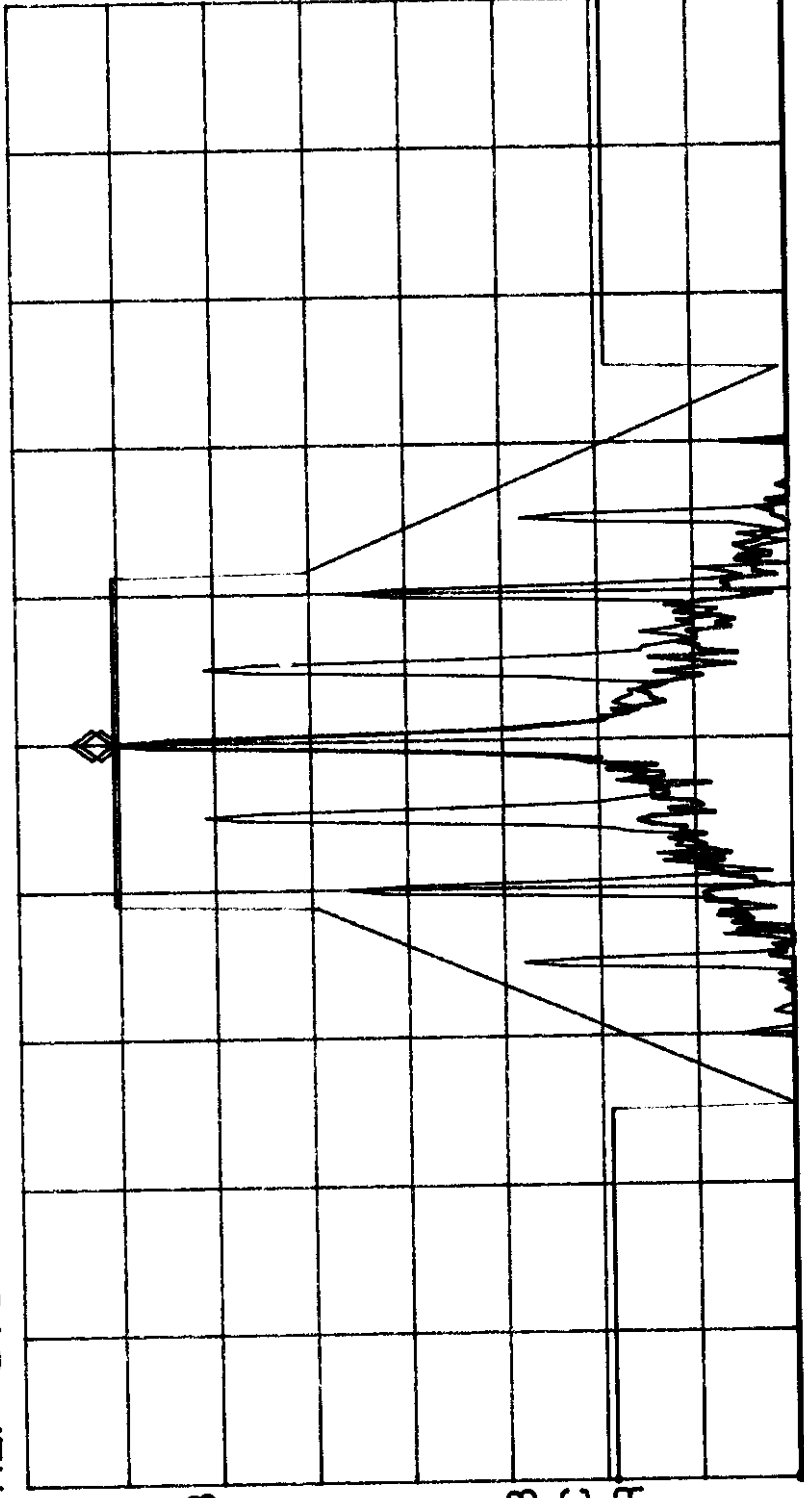

SPAN 50.00 KHZ
SWP 15.0 sec
AVG BW 100 Hz



UltraTech
Engineering Labs Inc.

FUTURECOM SYSTEMS GROUP INC.

CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVHFHP

Tx Freq.: 173.4 MHz, Measured RF Output @ Antenna: Watts
Modulation: RF IN at max. level of 0 dBm @160 MHz, FM modulated with 2.5 kHz Sine Wave
Signal, Freq. Dev.: ± 2.00 kHz

Date: May 18, 1999
Tested by: Hung Trinh

CENTER

173.99988 MHz

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

MKR 173.99988 MHz


42.35 dBm

No user

Menu

REF OFFST 30.0 dB

REF 52.4 dBm MASK 0 RF OUT (12.5 kHz CHANNEL SPACING)

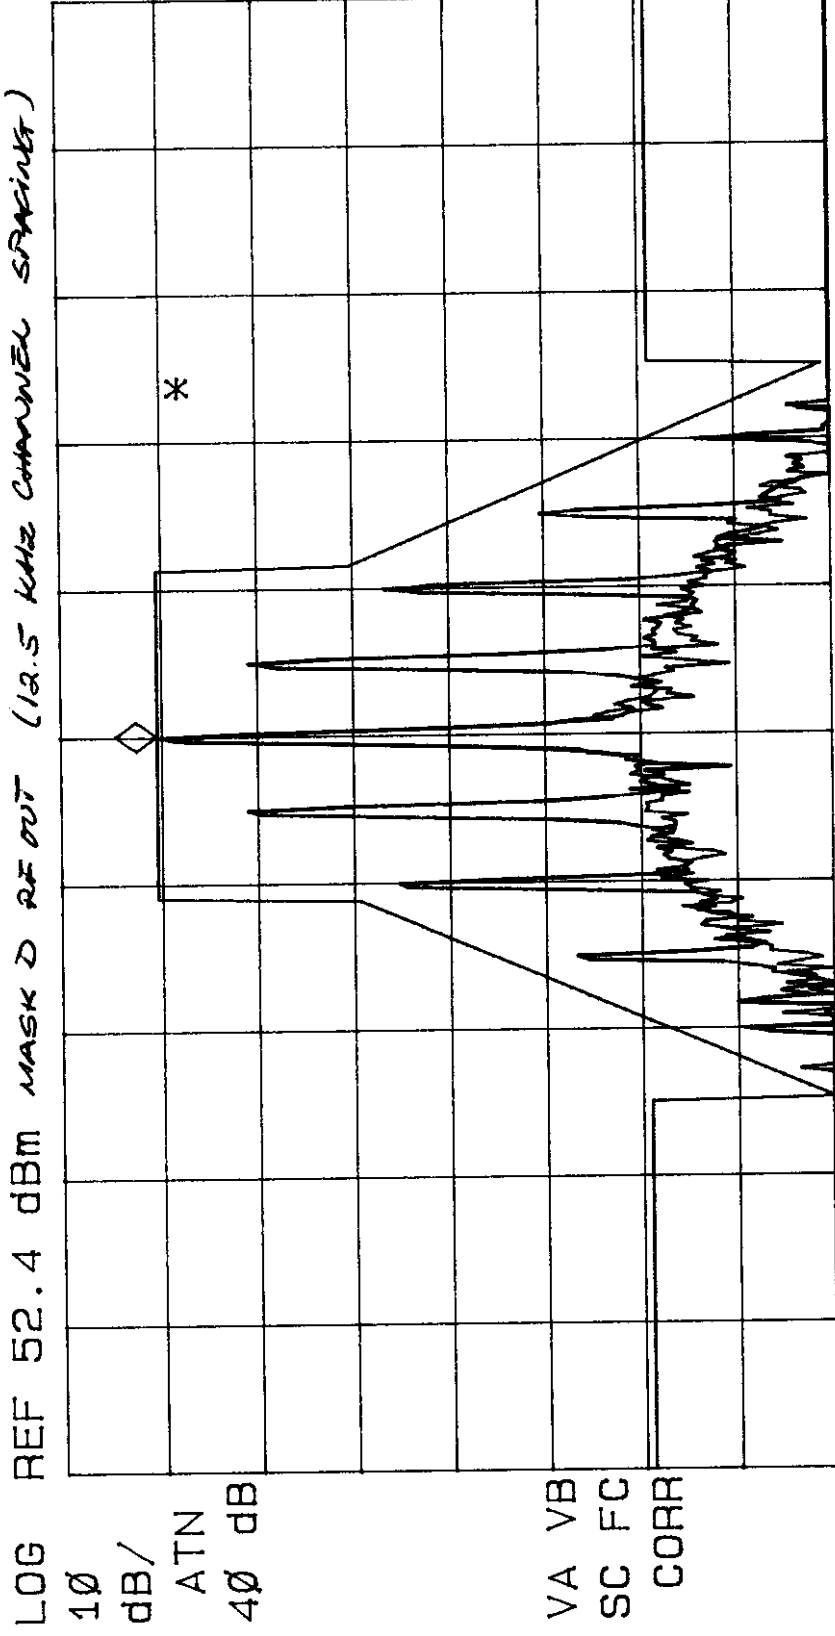

CENTER 173.99988 MHz

#IF BW 100 Hz

#AVG BW 100 Hz

SPAN 50.00 KHz

SWP 15.0 sec



FUTURECOM SYSTEMS GROUP INC.

CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVHFHP

Tx Freq.: 162.2 MHz, Measured RF Output @ Antenna: Watts
Modulation: RF IN at max. level of 0 dBm @ 160 MHz, FM modulated with 2.5 kHz Sine Wave
Signal, Freq. Dev.: ± 2.50 kHz

Date: May 18, 1999
Tested by: Hung Trinh

REF LEVEL
52.2 dBm


ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 161.99975 MHz
42.18 dBm

No user

Menu

REF OFFST 30.0 dB

LOG REF 52.2 dBm MARK D RF OUT (12.5 kHz CHANNEL SPACING)

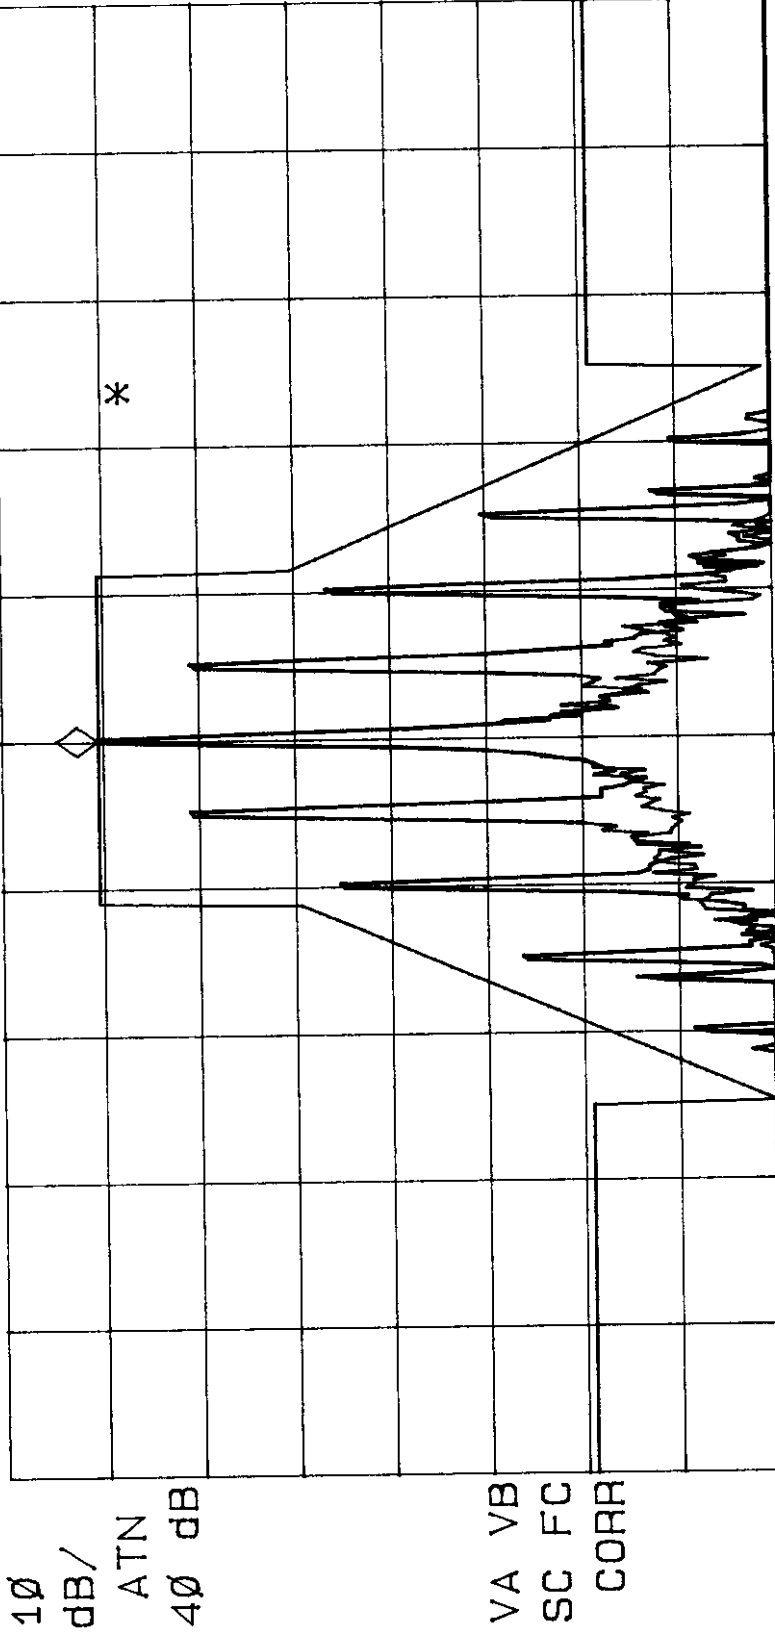

CENTER 161.99975 MHz

#IF BW 100 Hz

#AVG BW 100 Hz

SPAN 50.00 kHz

SWP 15.0 sec



FUTURECOM SYSTEMS GROUP INC.

CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVHFHP

Tx Freq.: 150 MHz, Measured RF Output @ Antenna: Watts
Modulation: RF IN at max. level of 0 dBm @ 160 MHz, FM modulated with 2.5 kHz Sine Wave
Signal, Freq. Dev.: ± 2.00 kHz


Date: May / 8, 1999
Tested by: Hung Trinh

REF LEVEL
52.1 dBm

ACTV DET: PEAK No user
MEAS DET: PEAK QP AVG Menu

MKR 149.99988 MHz
42.08 dBm

REF OFFST 30.0 dB MASK D RF OUT (12.5 kHz CHANNEL SPACING)
REF 52.1 dBm

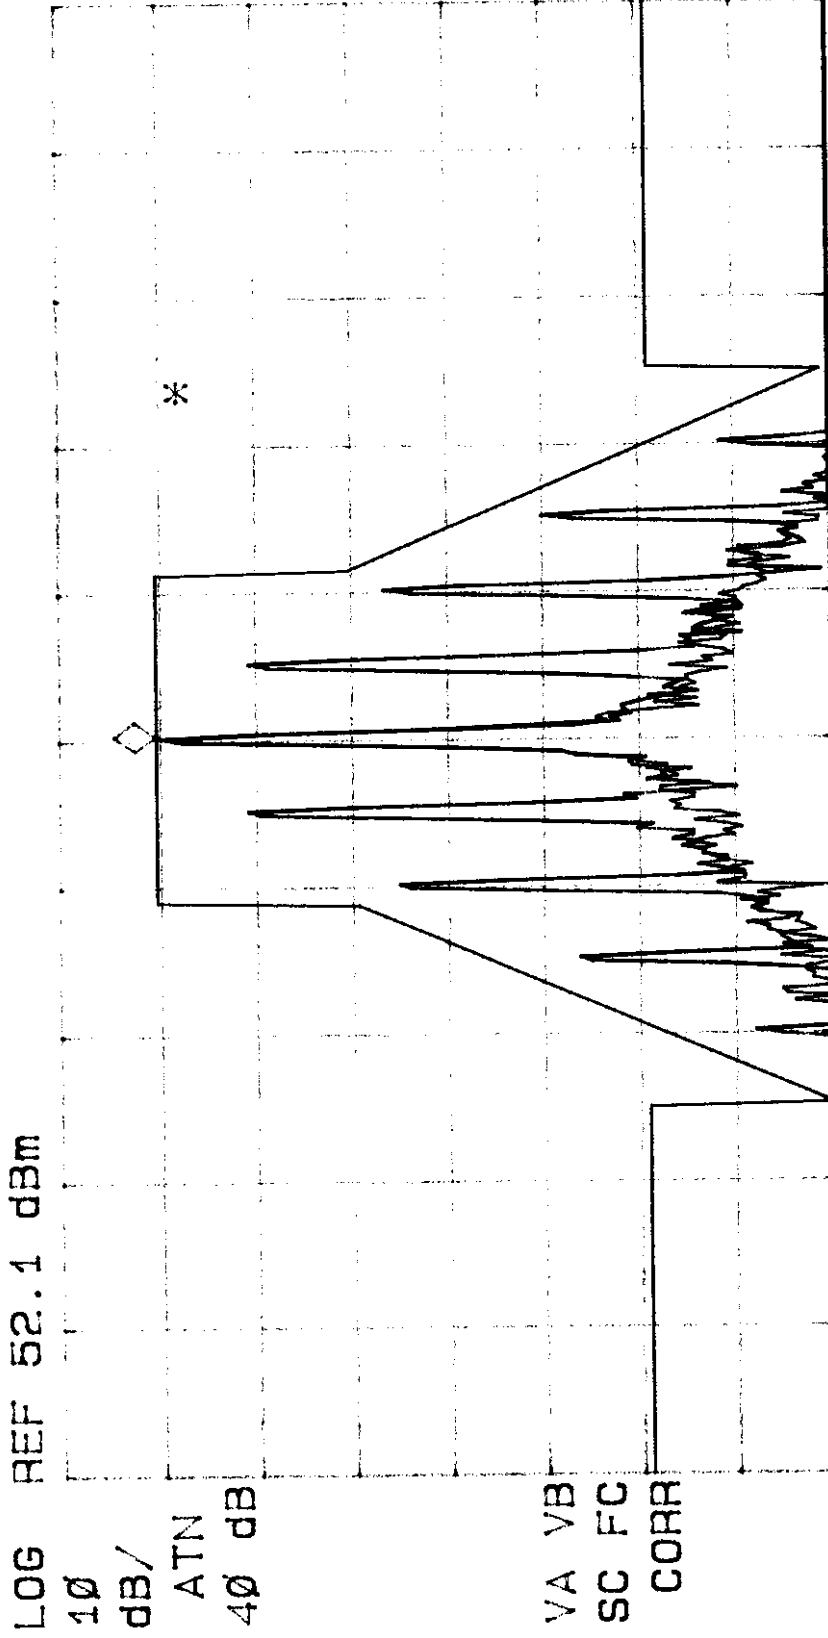

CENTER 149.99975 MHz SPAN 50.00 kHz
#IF BW 100 Hz #AVG BW 100 Hz SWP 15.0 sec



FUTURECOM SYSTEMS GROUP INC.

CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVHFHP

Tx Freq.: _____ MHz, Measured RF Output @ Antenna: _____ Watts

Modulation: RF IN at max. level of 0 dBm @ 160 MHz, FM modulated with an external 9600 b/s random data, Freq. Dev.: _____ kHz

Date: May 18, 1999
Tested by: Hung Trinh

REF LEVEL
9.4 dBm


ACTV DET: PEAK
MEAS DET: PEAK QP AVG

No user

Menu


MKR 160.0000 MHz
- .68 dBm

RF IN SIGNAL FITTED IN THE MASK C FOR 25 KHZ CHANNEL SPACING

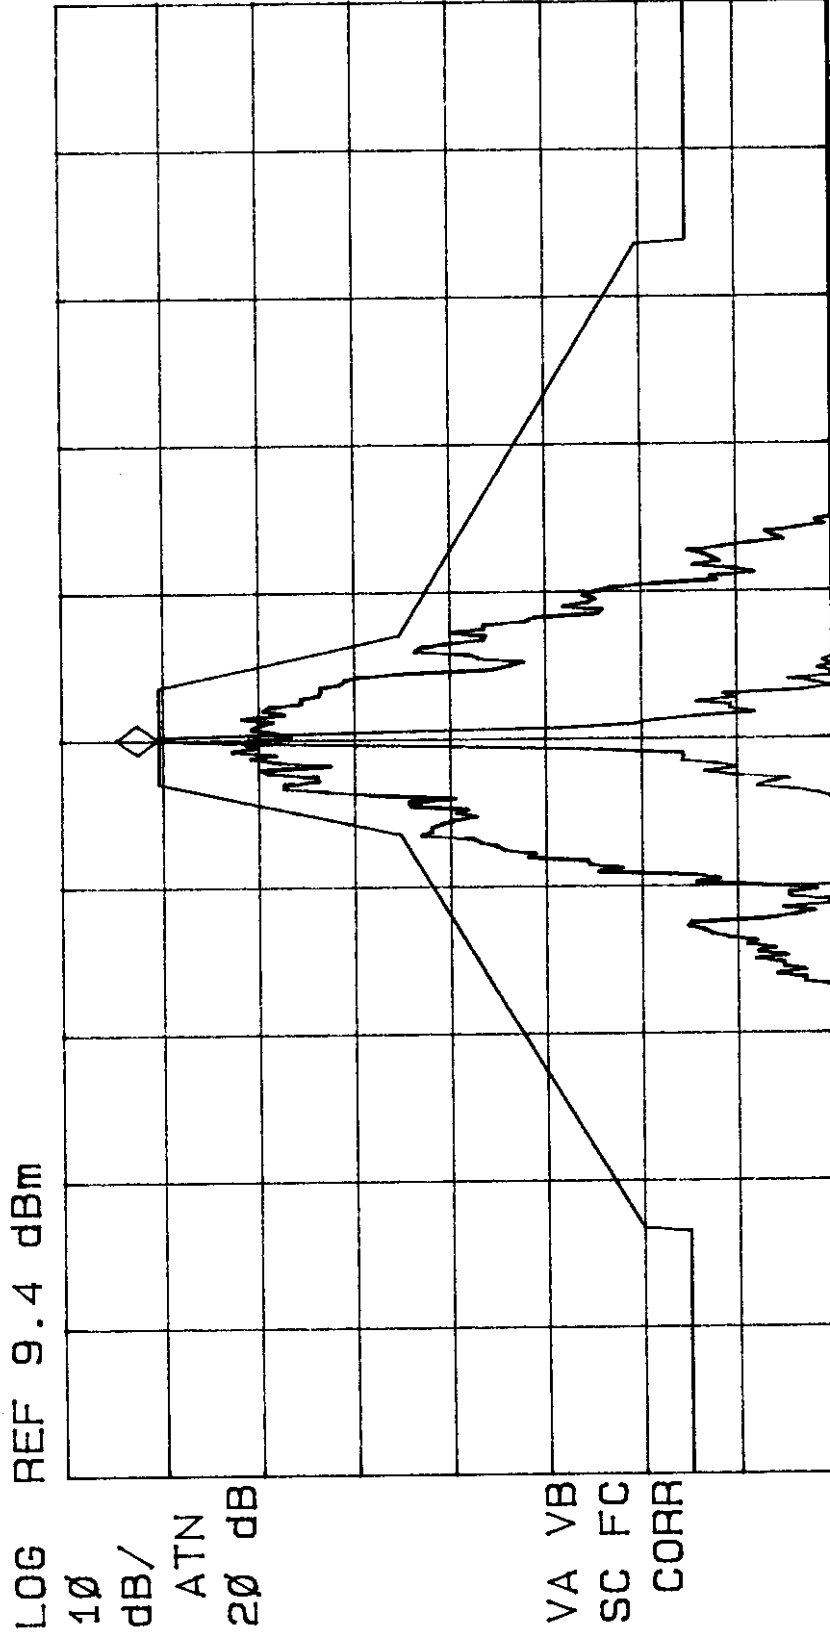

CENTER 160.0000 MHz
#IF BW 300 Hz

SPAN 150.0 KHz
SWP 5.00 sec



CHANNEL MODULATED (RADIO TRANSLATOR), MODEL CMVHFHP

Modulation: RF IN at max. level of 0 dBm @160 MHz, FM modulated with an external 9600 b/s random data, Freq. Dev.: ± 4.0 kHz

Date: May 18, 1999
Tested by: Hung Trinh


REF LEVEL
52.3 dBm

ACTV	DET:	PEAK	No user
MEAS	DET:	PEAK	Menu
		QP	AVG

MKR 174.0000 MHz
42.30 dBm

REF OFFST 30.0 dB

MASK C RF OUT (25 KHZ CHANNEL SPACING)

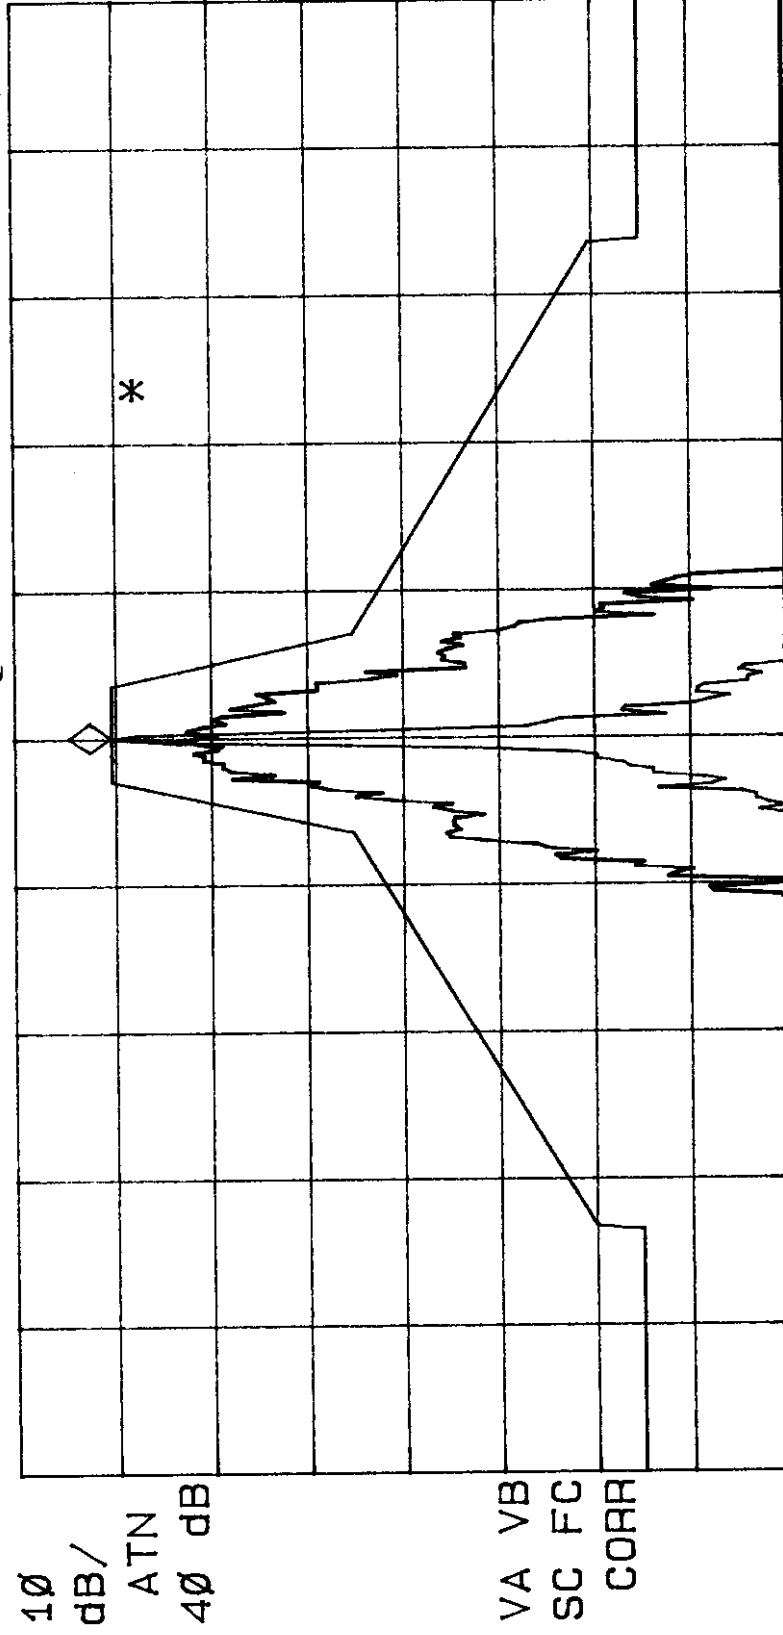

CENTER 174.0000 MHz
#IF BW 300 Hz

SPAN 150.0 KHZ
SWP 5.00 sec



FUTURECOM SYSTEMS GROUP INC.
CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVHFHP

Tx Freq.: 162.0 MHz, Measured RF Output @ Antenna: Watts
Modulation: RF IN at max. level of 0 dBm @160 MHz, FM modulated with an external 9600 b/s random data, Freq. Dev.: ± 4.0 kHz

Date: May 18, 1999
Tested by: Hung Trinh

REF LEVEL
52.1 dBm

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 162.0000 MHz
42.08 dBm


No user
Menu

REF OFFST 30.0 dB

LOG 10 dB/ ATN 40 dB

REF 52.1 dBm

MASK C RF OUT (25 kHz CHANNEL SPACING)

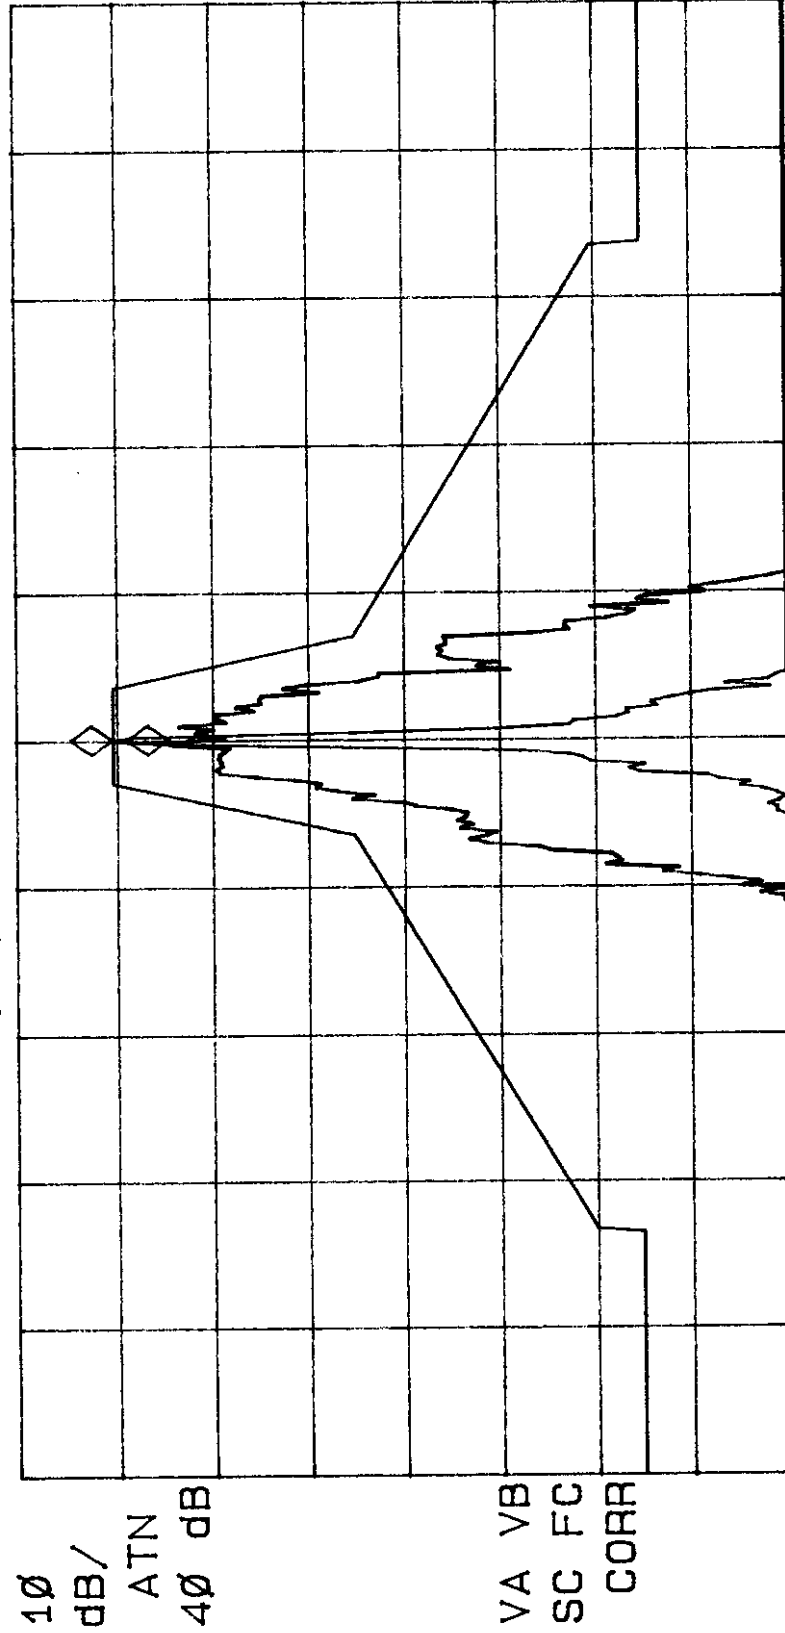

CENTER 162.0000 MHz

#IF BW 300 Hz

#AVG BW 300 Hz

SPAN 150.0 kHz

SWP 5.00 sec



UltraTech
Engineering Labs Inc.

FUTURECOM SYSTEMS GROUP INC.

CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVHFHP


Tx Freq.: 150.000 MHz, Measured RF Output @ Antenna: 41.92 Watts

Modulation: RF IN at max. level of 0 dBm @ 160 MHz, FM modulated with an external 9600 b/s random data, Freq. Dev.: 24.0 kHz

Date: May 18, 1999
Tested by: Hung Trinh

No user
Menu

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 150.0000 MHz
41.92 dBm

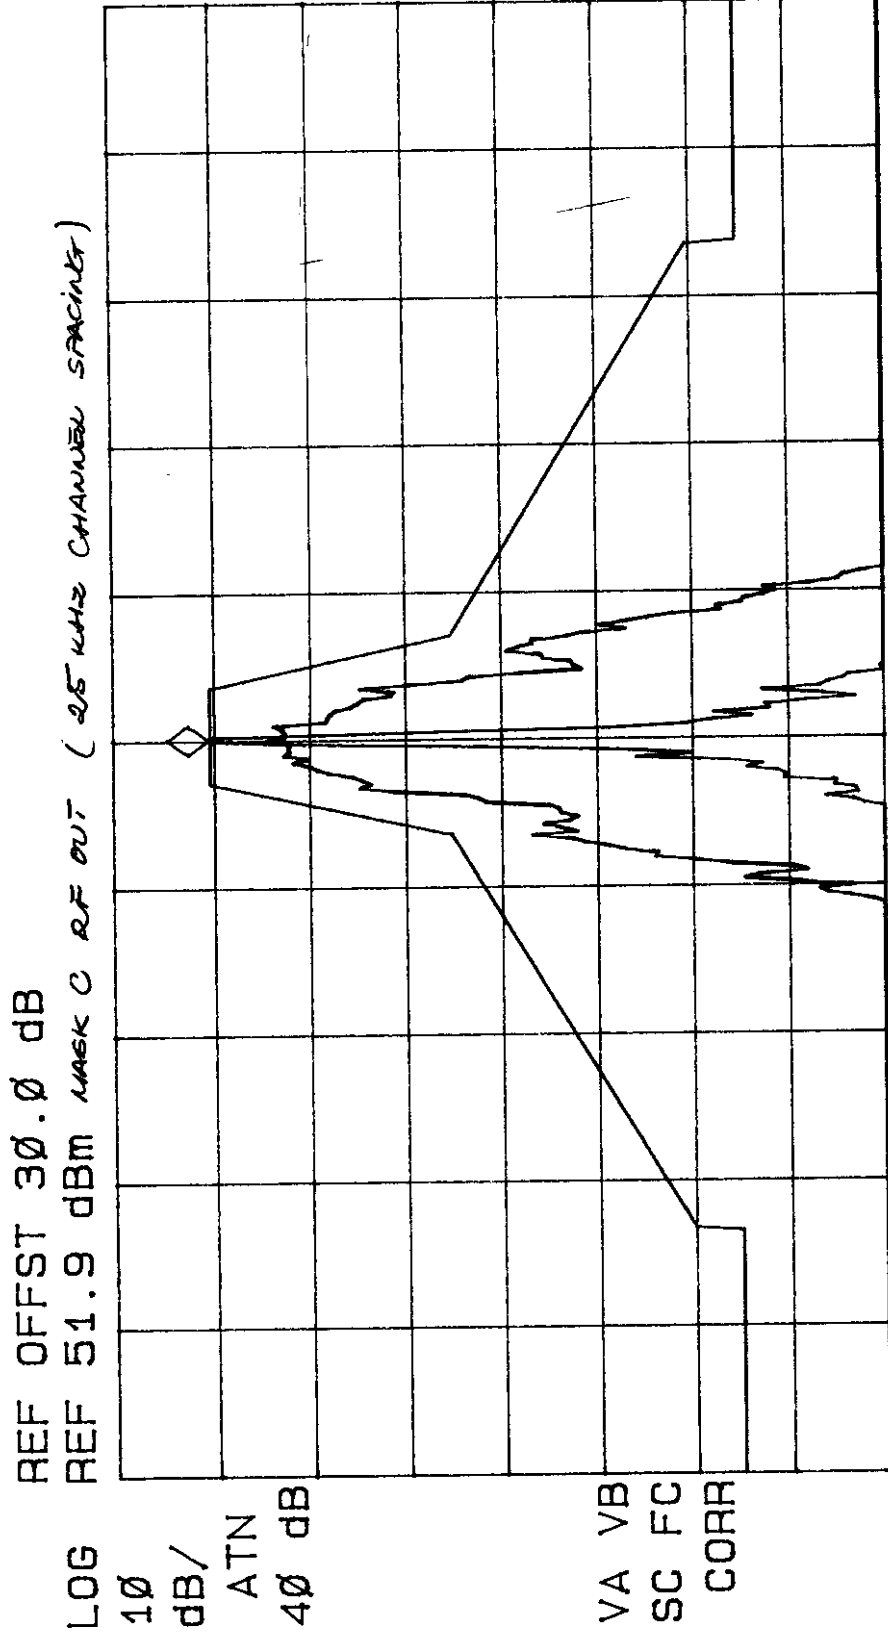

CENTER 150.0000 MHz SPAN 150.0 KHz
#IF BW 300 Hz #AVG BW 300 Hz SWP 5.00 sec



UltraTech
Engineering Labs Inc.

FUTURECOM SYSTEMS GROUP INC.

CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVHFHP

Tx Freq.: 160 MHz, Measured RF Output @ Antenna: 2.5 Watts
Modulation: RF IN at max. level of 0 dBm @160 MHz, FM modulated with 2.5 kHz SINE
WAVE SIGNAL, FREQ DEV. = ± 4 kHz

Date: May 18, 1999
Tested by: Hung Trinh


hp

REF LEVEL
9.7 dBm

RF IN SIGNAL FITTED IN THE MASK B FOR
25KHz CHANNEL ~~SPACING~~ ^{ACTIVELY} DET. ~~SYSTEM~~ ^{PEAK}

No user
Menu

MEAS DET: PEAK QP AVG
MKR 160.0000 MHz
- .32 dBm

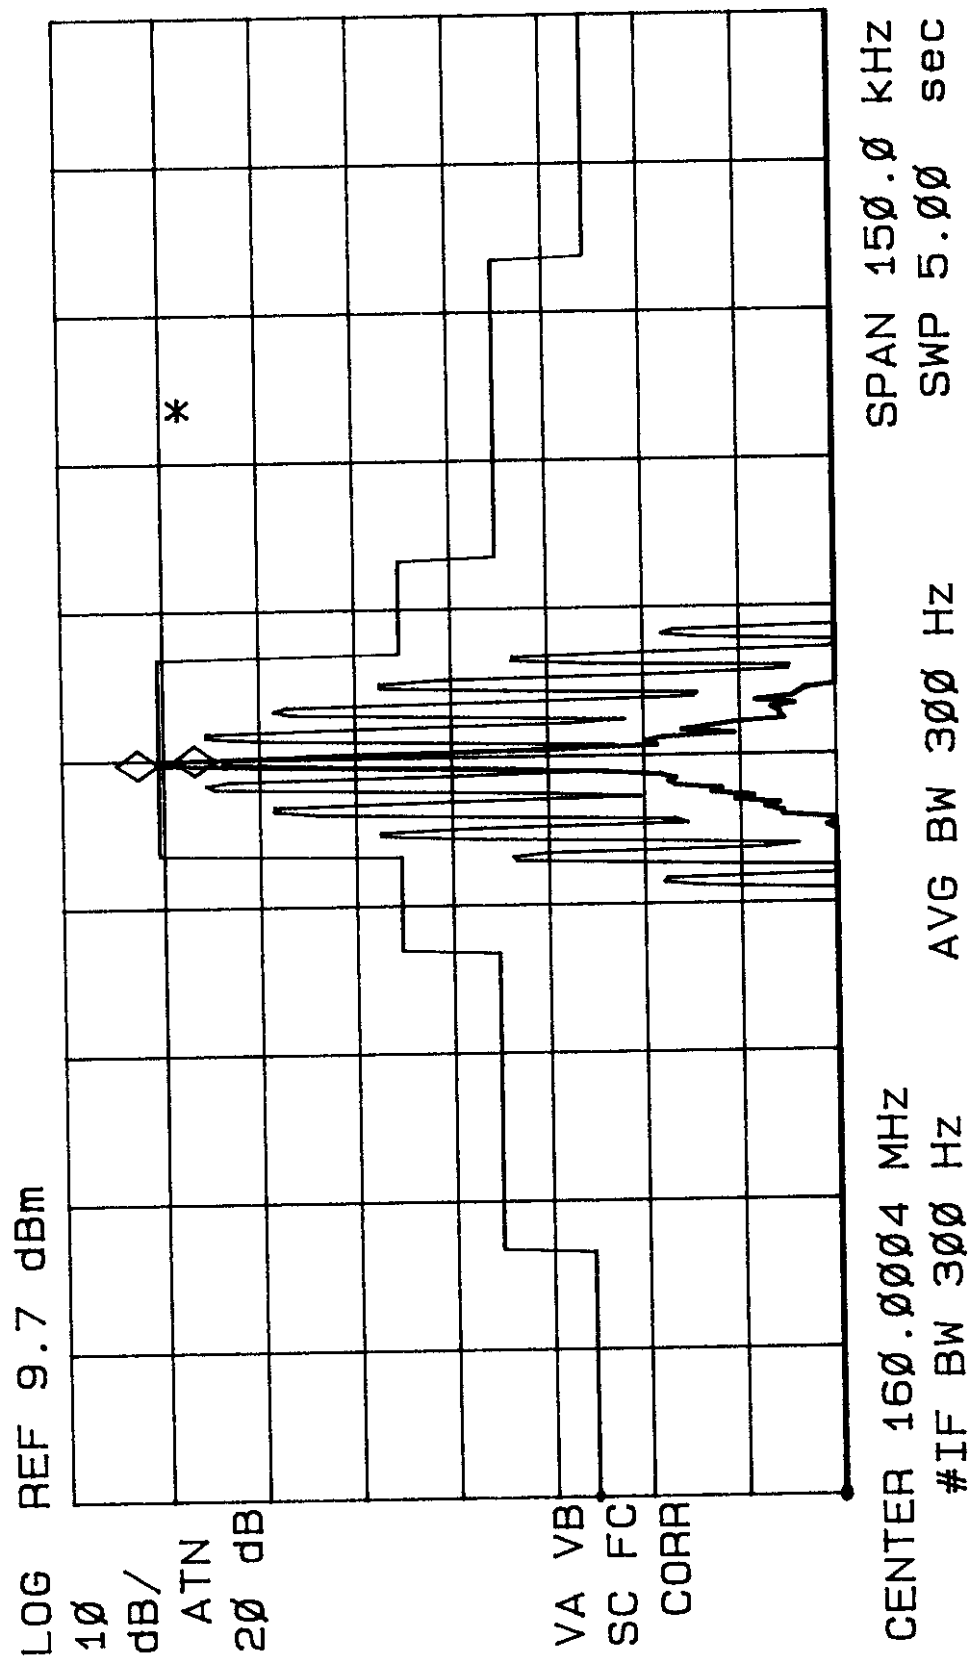



UltraTech
Engineering Labs Inc.

FUTURECOM SYSTEMS GROUP INC.

CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVHFHP

Tx Freq.: 150 MHz, Measured RF Output @ Antenna: Watts
Modulation: RF IN at max. level of 0 dBm @ 160 MHz, FM modulated with 2.5 kHz Sine Wave
Signal, Freq. Dev.: 400 kHz

Date: May 18, 1999
Tested by: Hung Trinh

REF LEVEL
51.9 dBm

ACTV DET: PEAK
MEAS DET: PEAK QP AVG

No user

Menu


MKR 150.0000 MHz
41.90 dBm

REF OFFST 30.0 dB

MASK & RF OUT (25 kHz channel spacing)

LOG REF 51.9 dBm

10
dB/
ATN
40 dB

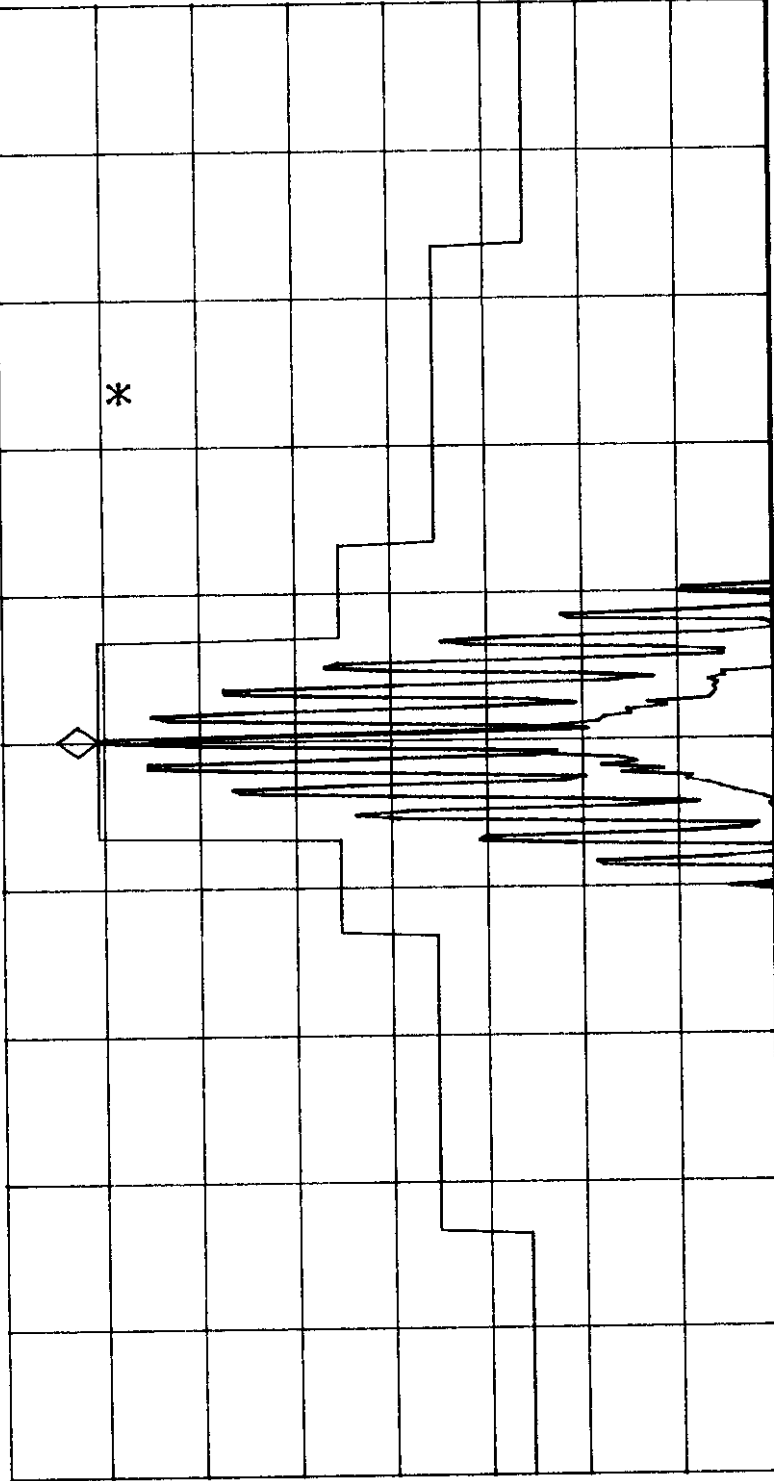

VA VB
SC FC
CORR

CENTER 150.0000 MHz
#IF BW 300 Hz

SPAN 150.0 KHz
SWP 5.00 sec

#AVG BW 300 Hz



FUTURECOM SYSTEMS GROUP INC.

CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVHFHP

Tx Freq.: 162 MHz, Measured RF Output @ Antenna: _____ Watts
Modulation: RF IN at max. level of 0 dBm @ 160 MHz, FM modulated with 2.5 kHz Sine Wave
Signal, Freq. Dev.: ± 4.0 kHz

Date: May 28, 1999
Tested by: Hung Trinh

REF LEVEL
52.1 dBm


ACTV DET: PEAK
MEAS DET: PEAK QP AVG

NO USER
Menu
MKR 162.0000 MHz
42.10 dBm

REF OFFST 30.0 dB

REF 52.1 dBm

MASK B RF OUT (2.5 kHz CHANNEL SPACING)

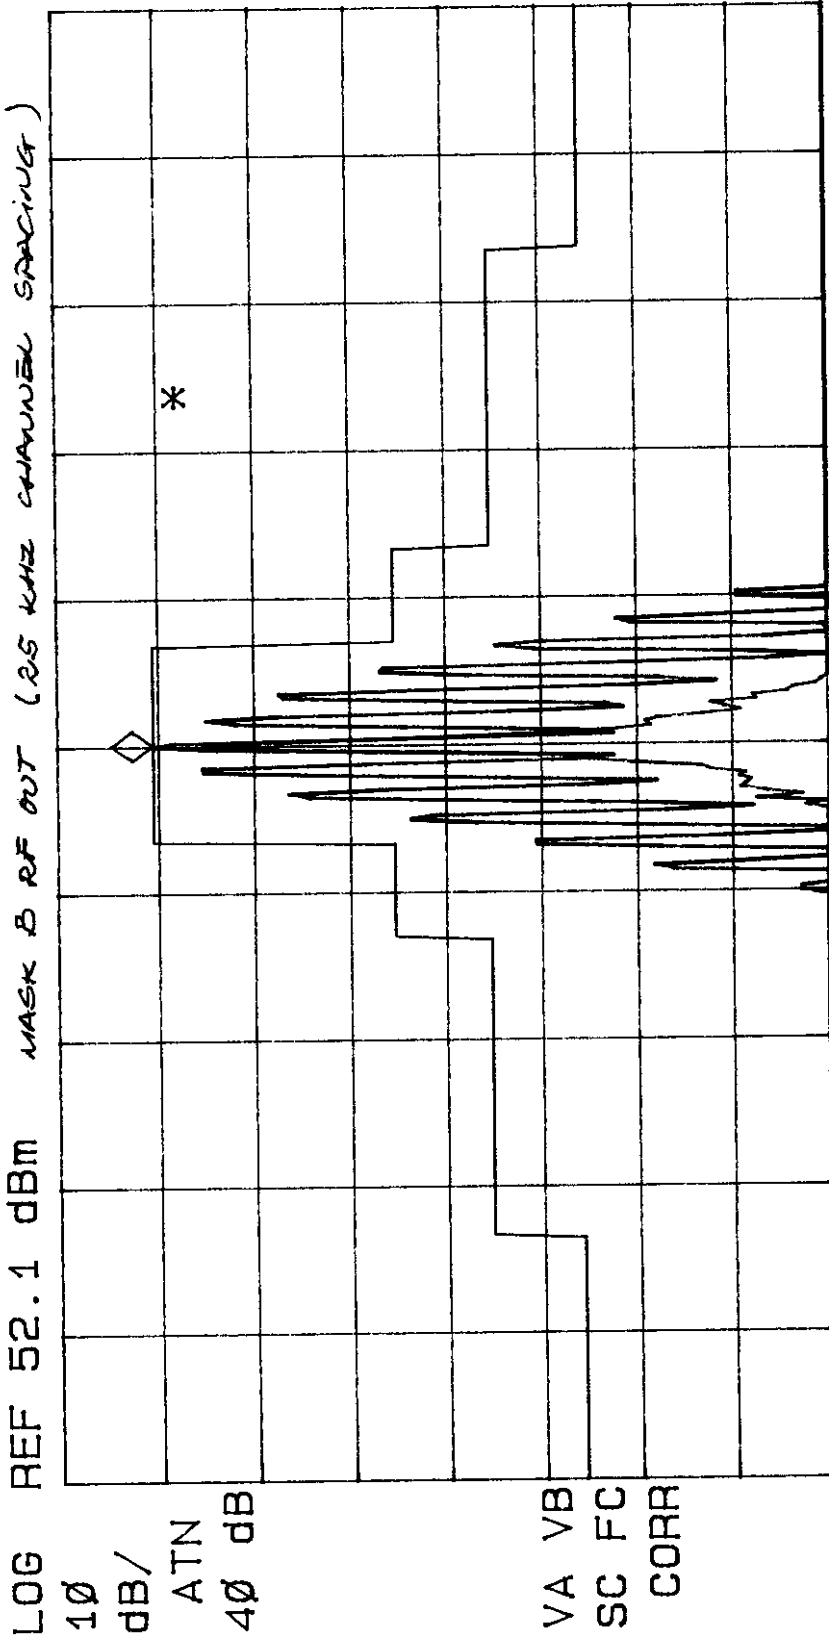

CENTER 162.0000 MHz

#IF BW 300 Hz

#AVG BW 300 Hz

SPAN 150.0 kHz

SWP 5.00 sec



UltraTech
Engineering Labs Inc.

h77

Date: May 28, 1999
Tested by: Hung Trinh

FUTURECOM SYSTEMS GROUP INC.
CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVHFHP

Tx Freq.: 174 MHz, Measured RF Output @ Antenna: _____ Watts
Modulation: RF IN at max. level of 0 dBm @ 160 MHz, FM modulated with 2.5 kHz Sine Wave
Signal, Freq. Dev.: ± 4.0 kHz


REF LEVEL
52.3 dBm

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 174.0000 MHz
42.30 dBm

No user
Menu

REF OFFST 30.0 dB
REF 52.3 dBm

MASK B RF OUT (25KHZ CHANNEL SPACING)

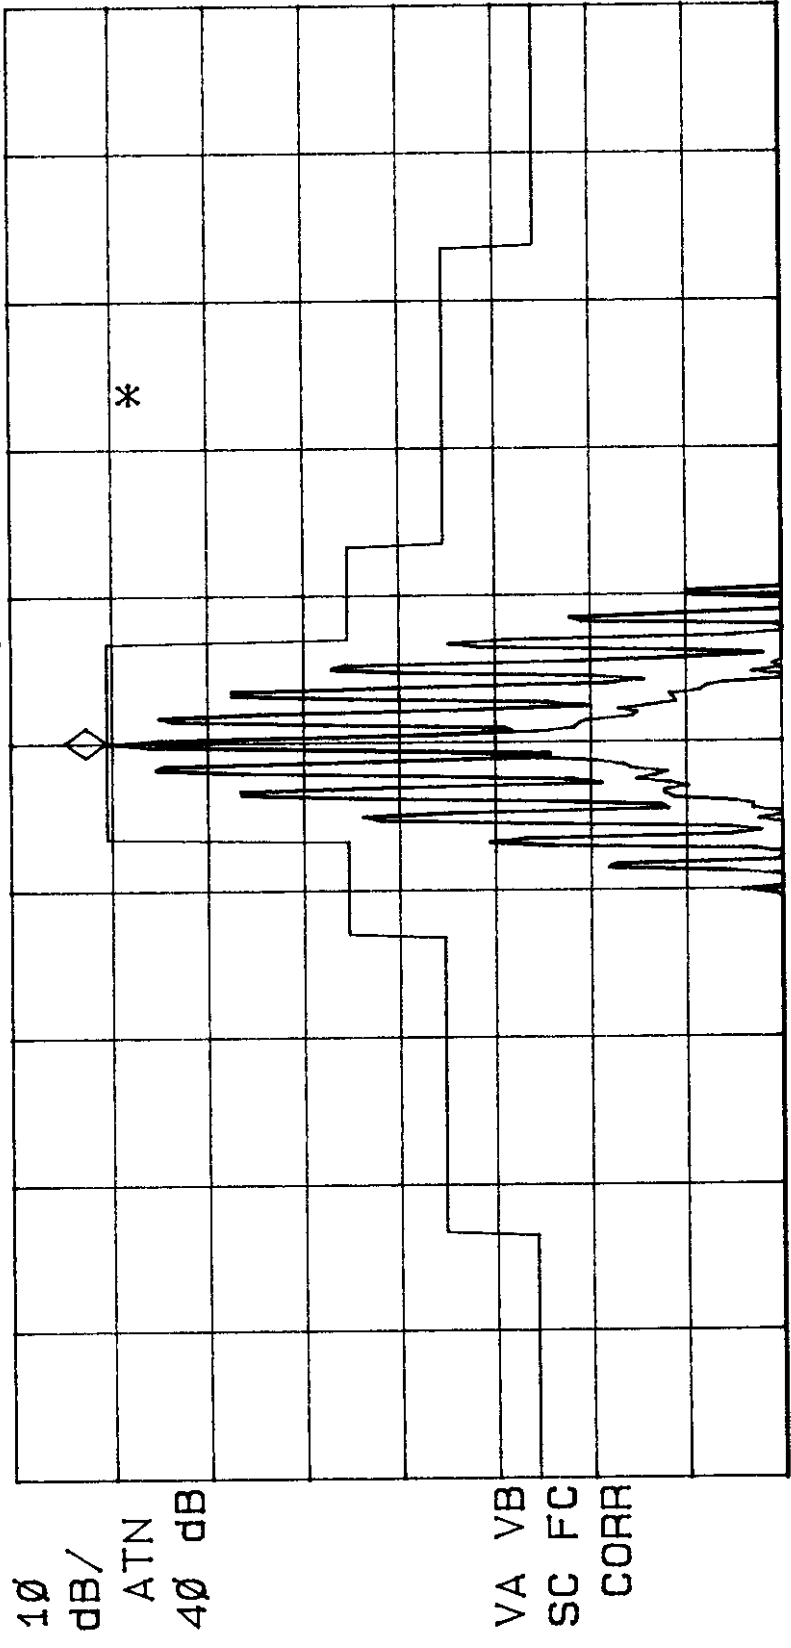

CENTER 174.0000 MHz
#IF BW 300 Hz

#AVG BW 300 Hz

SPAN 150.0 KHz
SWP 5.00 sec

4.5 TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS @ FCC 90.210

PRODUCT NAME: VHF CHANNEL MODULE (MOBILE RADIO TRANSLATOR),
Model No.: CM VHF HP

FCC REQUIREMENTS:

FCC Part 90, Sub. I, Para. 90.210

Emissions shall be attenuated below the mean output power of the transmitter as follows:

FREQUENCY RANGE (MHz)	RECOMMENDED OBW (KHz)	CHANNEL SPACING (KHz)	RECOMMENDED FREQ. DEVIATION (KHz)	FCC SPECIFICATION LIMITS (Para. No.)
150 - 174	20	25.0	5.0	$43+10*\log(P)$ in watts or -13 dBm
150 - 174	11.25	12.5	2.5	$50+10*\log(P)$ in watts or -20 dBm
150 - 174	6.25	7.5	1.25	$55+10\log(P)$ in watts or 65dB, whichever is the lesser attenuation (-22dBm)

For worst case of measurement the limit of -22 dBm is applied for all case.

CLIMATE CONDITION:

Standard Temperature and Humidity:

- Ambient temperature: 21 °C
- Relative humidity: 43%

POWER INPUT:

13.8 Vdc Battery.

TEST EQUIPMENT:

- Advantest Spectrum Analyzer, Model R3271, S/N: 15050203
- Bird Attenuator, 50 Ohm IN/OUT
- Hihpass Filter, Microphase, P/N: CR220HIB, S/N: IITI11000AB, cut-off freq.: 600 MHz.
- Audio Oscillator, HP, Model 204C, SN: 0989A08798, Output: 0-1.2 MHz, 5 Vrms.

METHOD OF MEASUREMENTS:

With transmitter modulation characteristics described in Out-of-Band Emissions measurements @ 2.989, the transmitter spurious and harmonic emissions were scanned. The spurious and harmonic emissions were measured with the Spectrum Analyzer controls set as RBW = 100 kHz, VBW = 100 kHz and SWEEP TIME = AUTO). The transmitter was operated at a full rated power output, and modulated as follows:

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>


File #: FSG-22BFT
July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

FCC CFR 47, Para. 2.997 - Frequency spectrum to be investigated:- The spectrum was investigated from the lowest radio generated in the equipment up to at least the 10th harmonic of the carrier frequency or to the highest frequency practicable in the present state of the art of measuring techniques, whichever is lower. Particular attention should be paid to harmonics and subharmonics of the carrier frequency. Radiation at the frequencies of multiplier stages should be checked. The amplitude of spurious emissions which are attenuated more than 30 dB below the permissible value need not be reported.

FCC CFR 47, Para. 2.991 - Spurious Emissions at Antenna Terminal:- The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of the harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in 2.989 as appropriate. The magnitude of spurious emissions which are attenuated more than 30 dB below the permissible value need not be specified.

TEST ARRANGEMENT

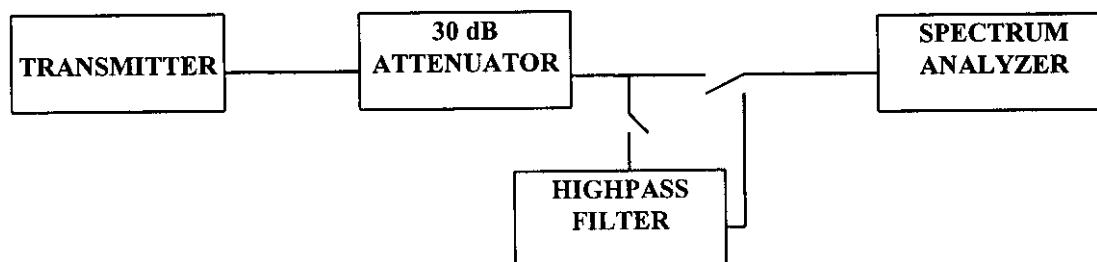

TEST RESULTS: Conforms.

TEST PERSONNEL: Hung Trinh, EMI/RFI Technician

DATE: May 18 & July 1, 1999

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT
July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

MEASUREMENT DATA

UNWANTED (SPURIOUS & HARMONIC) EMISSIONS AT THE TRANSMITTER ANTENNA TERMINAL

TEST CONFIGURATION

- The transmitter was coupled to the Spectrum Analyzer through a 30 dB attenuator.
- The insertion loss between the transmitter output terminal and the spectrum analyzer was measured to be 30 dB

RF In:	0 dBm @ 160 MHz			
RF Out:	43.2 dBm @ 150 MHz			
Modulation:	FM modulation with 2.5 kHz Sine Wave Signal, Freq. Dev. = 1.5 kHz			
FREQUENCY (MHz)	RF LEVEL (dBm)	LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
302	-30.0	-22	-8	PASS
The emissions were scanned from 10 MHz to 2 GHz and all emissions less than 15 dB below the limits were recorded.				

RF In:	0 dBm @ 160 MHz			
RF Out:	43.2 dBm @ 150 MHz			
Modulation:	FM modulation with 9600 b/s random data, Freq. Dev. = 1.5 kHz			
FREQUENCY (MHz)	RF LEVEL (dBm)	LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
302	-29.8	-22	-7.8	PASS
The emissions were scanned from 10 MHz to 2 GHz and all emissions less than 15 dB below the limits were recorded.				

RF In:	0 dBm @ 160 MHz			
RF Out:	43.2 dBm @ 162 MHz			
Modulation:	FM modulation with 2.5 kHz Sine Wave Signal, Freq. Dev. = 1.5 kHz			
FREQUENCY (MHz)	RF LEVEL (dBm)	LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
322	-24.1	-22	-2.1	PASS
The emissions were scanned from 10 MHz to 2 GHz and all emissions less than 15 dB below the limits were recorded.				

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT
July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

RF In: 0 dBm @ 160 MHz				
RF Out: 43.2 dBm @ 162 MHz				
Modulation: FM modulation with 9600 b/s random data, Freq. Dev. = 1.5 kHz				
FREQUENCY (MHz)	RF LEVEL (dBm)	LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
322	-24.7	-22	-2.7	PASS
The emissions were scanned form 10 MHz to 2 GHz and all emissions less than 15 dB below the limits were recorded.				

RF In: 0 dBm @ 160 MHz				
RF Out: 43.2 dBm @ 174 MHz				
Modulation: FM modulation with 2.5 kHz Sine Wave Signal, Freq. Dev. = 1.5 kHz				
FREQUENCY (MHz)	RF LEVEL (dBm)	LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
349	-24.6	-22	-2.6	PASS
The emissions were scanned form 10 MHz to 2 GHz and all emissions less than 15 dB below the limits were recorded.				

RF In: 0 dBm @ 160 MHz				
RF Out: 43.2 dBm @ 174 MHz				
Modulation: FM modulation with 9600 b/s random data, Freq. Dev. = 1.5 kHz				
FREQUENCY (MHz)	RF LEVEL (dBm)	LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
349	-25.0	-22	-3.0	PASS
The emissions were scanned form 10 MHz to 2 GHz and all emissions less than 15 dB below the limits were recorded.				

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT
July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



FUTURECOM SYSTEMS GROUP INC.

CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVHFHP

Tx Freq.: 150 MHz, Measured RF Output @ Antenna: Watts

Modulation: RF IN at max. level of 0 dBm @ 160 MHz,

FM Modulated with 2.5 kHz Sine Wave Signal. Freq. Dev.: 1.5 kHz

Date: July 01, 1999
Tested by: Hung Trinh


MARKER
304 MHz
-30.00 dBm

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 304 MHz
-30.00 dBm

No user
Menu

REF OFFST 30.0 dB
REF 10.0 dBm

LOG
10
dB/
ATN
10 dB

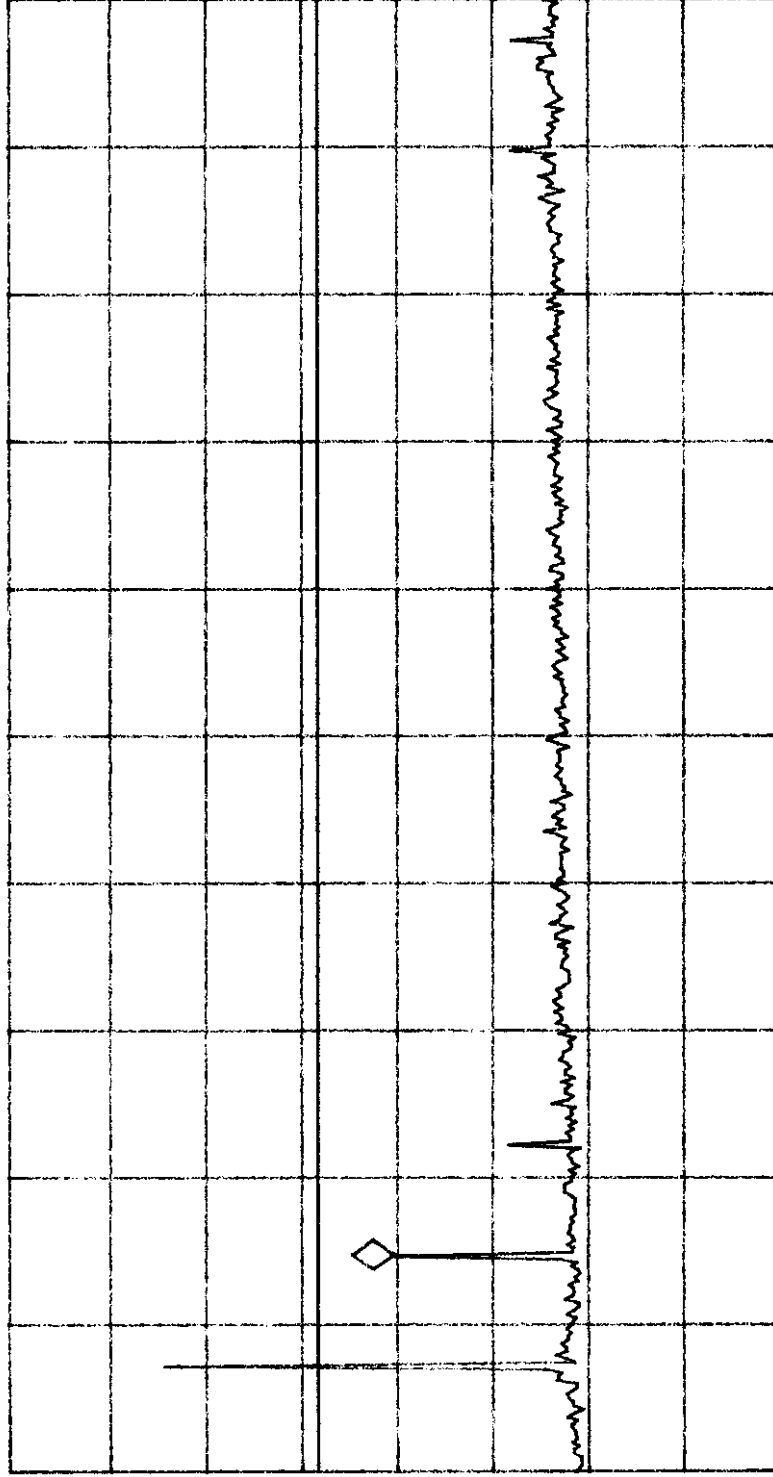

VA SB
SC FC
CORR

START 10 MHz
IF BW 120 kHz
STOP 2.000 GHz
AVG BW 300 kHz
SWP 415 msec



UltraTech
Engineering Labs Inc.

h/p

FUTURECOM SYSTEMS GROUP INC.

CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVHFHP

Tx Freq.: 1570 MHz, Measured RF Output @ Antenna: _____ Watts

Modulation: RF IN at max. level of 0 dBm @ 160 MHz,

FM Modulated with an external 9600 b/s random data. Freq. Dev.: ± 1.5 kHz

Date: July 27, 1999

Tested by: Hung Trinh

MARKER

304 MHz

-29.82 dBm

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

MKR 304 MHz

-29.82 dBm

No user

Menu

REF OFFST 30.0 dB

LOG REF 10.0 dBm


LOG

10

dB/

ATN

10 dB

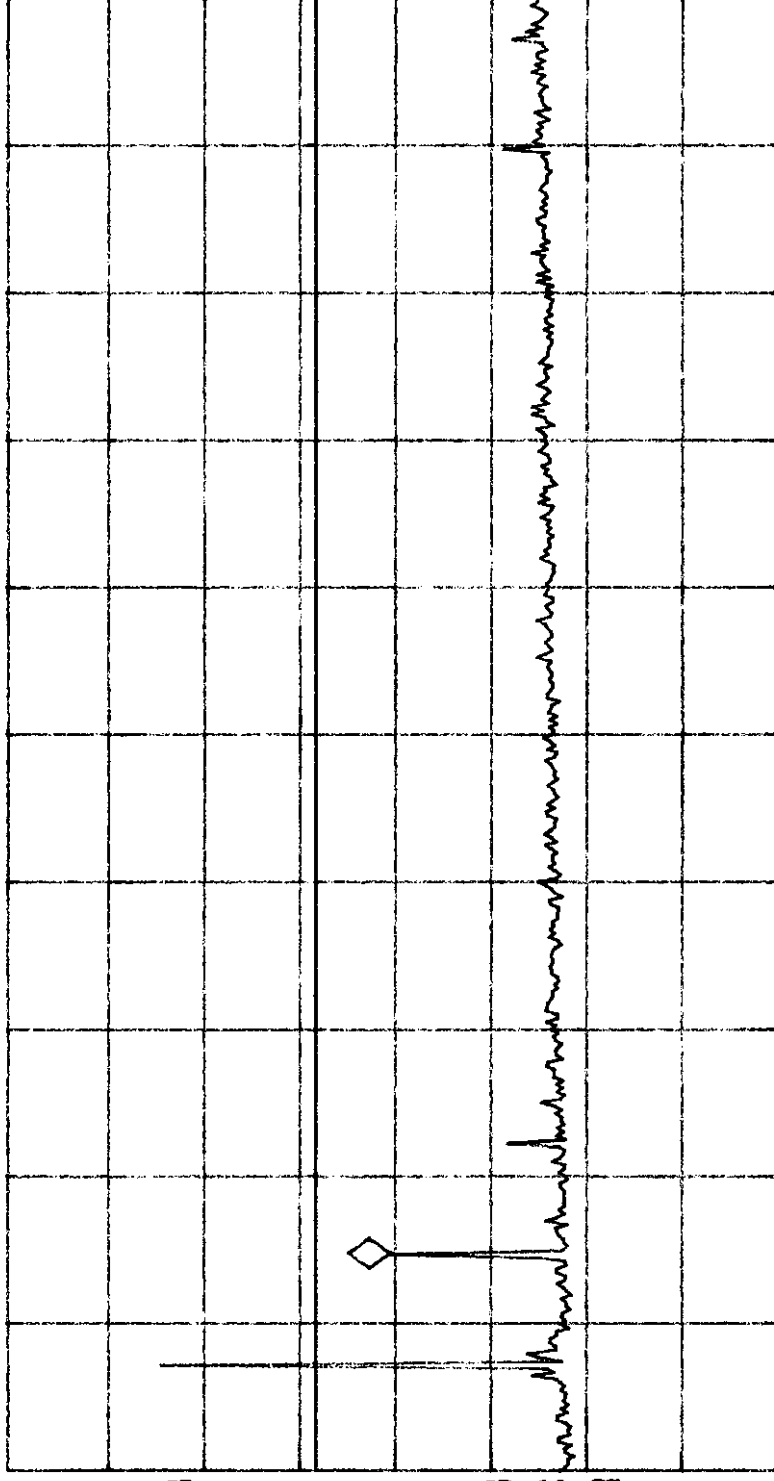

MA SB

SC FC

CORR

START 10 MHz

IF BW 120 kHz

AVG BW 300 kHz

STOP 2.000 GHz

SWP 415 msec



UltraTech
Engineering Labs Inc.

FUTURECOM SYSTEMS GROUP INC.

CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVHFHP

Tx Freq.: 262 MHz, Measured RF Output @ Antenna: _____ Watts
Modulation: RF IN at max. level of 0 dBm @ 160 MHz, FM modulated with 2.5 kHz Sine Wave
Signal, Freq. Dev.: ± 1.50 kHz

Date: May 18, 1999
Tested by: Hung Trinh

h70

MARKER
322 MHz
-24.05 dBm

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 322 MHz
-24.05 dBm

No user
Menu

REF OFFST 30.0 dB
REF 50.0 dBm

LOG

10

dB/

ATN

30 dB

DL


-14.7

dBm

MA SB

SC FC

CORR

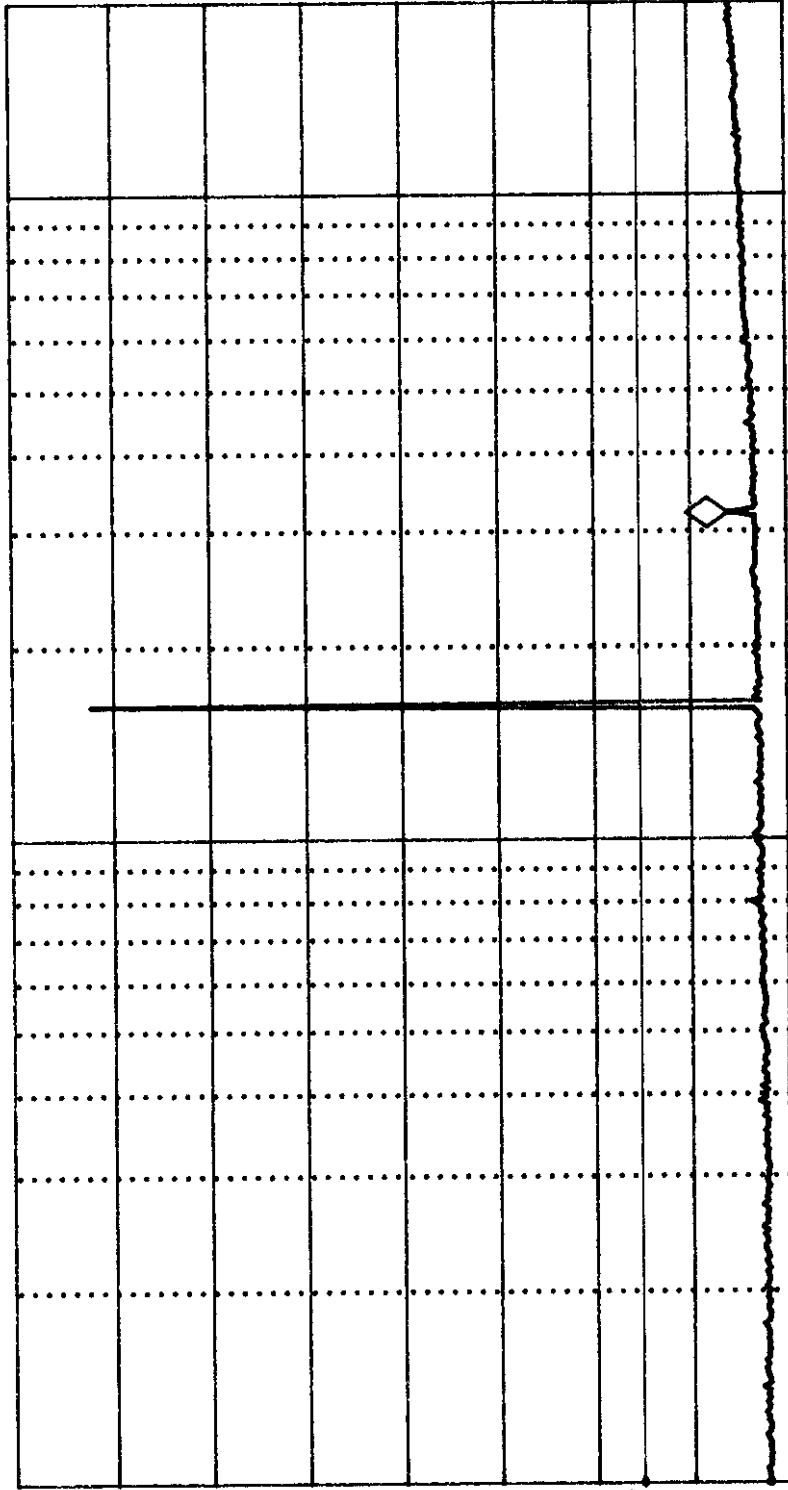

START 10 MHz

#IF BW 30 kHz

AVG BW 30 kHz

STOP 2.000 GHz

SWP 6.72 sec



FUTURECOM SYSTEMS GROUP INC.

CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVHFIP

Tx Freq.: 162 MHz, Measured RF Output @ Antenna: Watts

Modulation: RF IN at max. level of 0 dBm @160 MHz, FM modulated with an external 9600 b/s random data, Freq. Dev.: ± 1.50 kHz

Date: May 18, 1999
Tested by: Hung Trinh

MARKER

322 MHz

-24.66 dBm

ACTV DET: PEAK

MEAS DET: PEAK QP AVG

MKR 322 MHz

-24.66 dBm

No user

Menu

REF OFFST 30.0 dB

LOG REF 50.0 dBm

LOG
10
dB/

ATN

30 dB

DL


-14.7

dBm

MA SB

SC FC

CORR

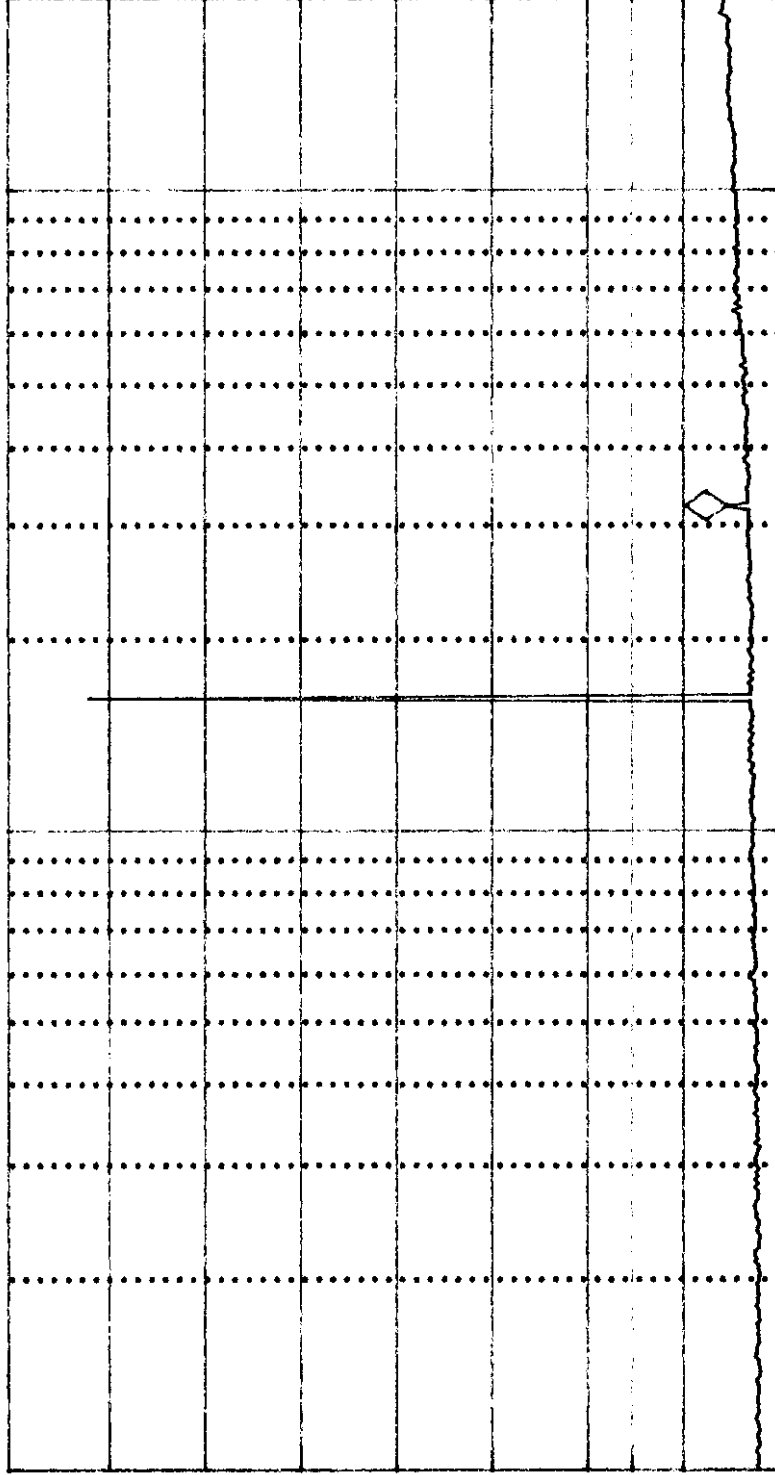

START 10 MHz

#IF BW 30 KHz

AVG BW 30 KHz

STOP 2.000 GHz

SWP 6.72 sec



UltraTech
Engineering Labs Inc.

FUTURECOM SYSTEMS GROUP INC.

CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVHFHP

Tx Freq.: /Z44 MHz, Measured RF Output @ Antenna: Watts

Modulation: RF IN at max. level of 0 dBm @160 MHz, FM modulated with 2.5 kHz Sine Wave

Signal, Freq. Dev.: ± 1.50 kHz

Date: May 18, 1999
Tested by: Hung Trinh


hp

MARKER
349 MHz
-24.58 dBm

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 349 MHz
-24.58 dBm

No user
Menu

LOG REF OFFST 30.0 dB
10 REF 50.0 dBm
dB/
ATN
30 dB

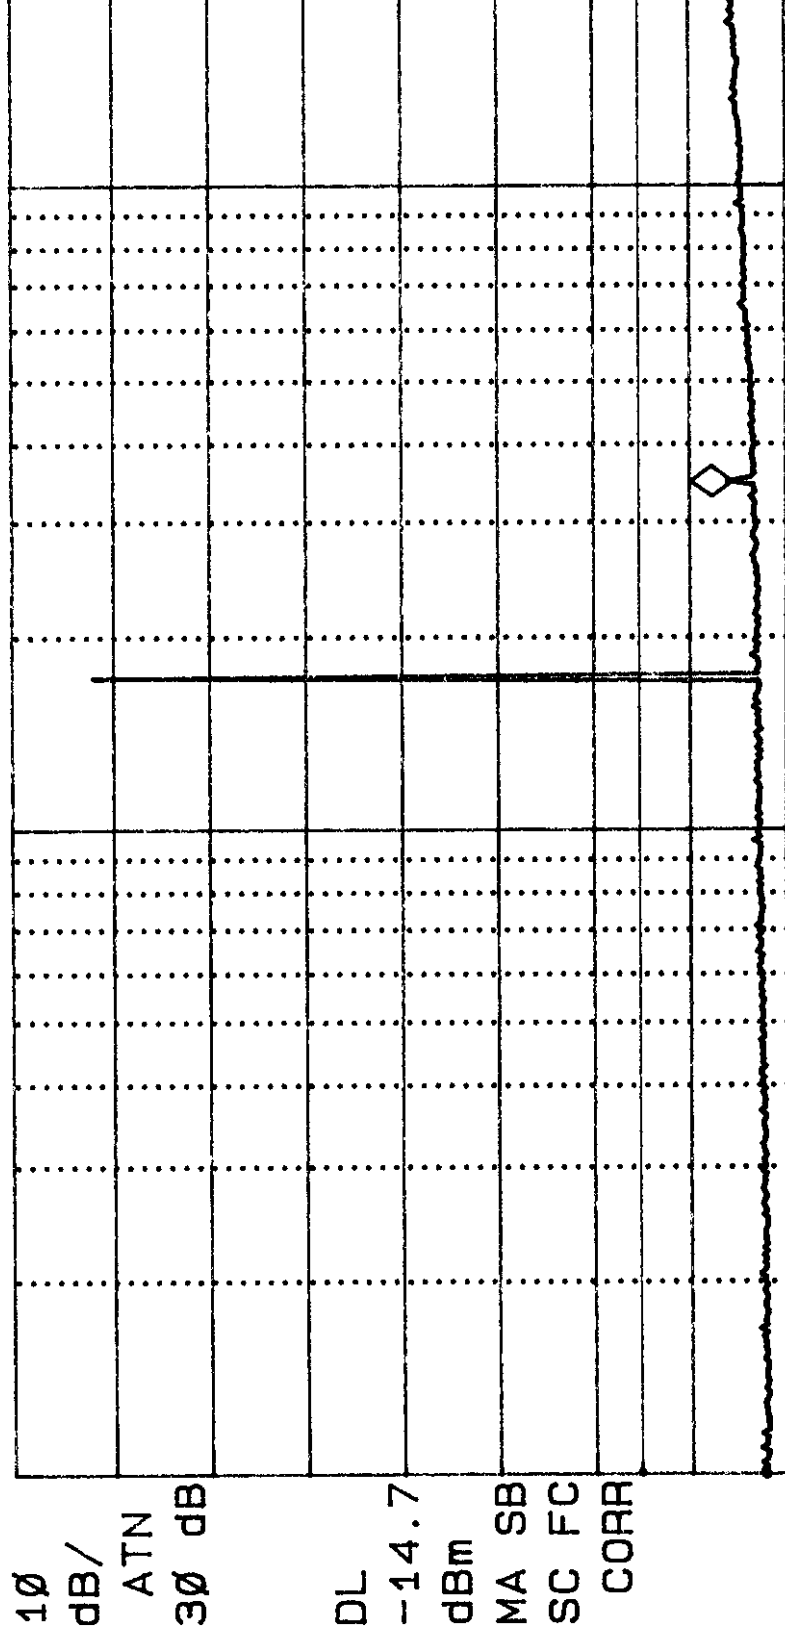

START 10 MHz
#IF BW 30 KHz
STOP 2.000 GHz
AVG BW 30 KHz
SWP 6.72 sec



UltraTech
Engineering Labs Inc.

FUTURECOM SYSTEMS GROUP INC.

CHANNEL MODULE (RADIO TRANSLATOR), MODEL CMVHFHP

Tx Freq.: / 24 MHz, Measured RF Output @ Antenna: Watts

Modulation: RF IN at max. level of 0 dBm @160 MHz, FM modulated with an external 9600 b/s random data, Freq. Dev.: ± 1.50 kHz

Date: May 28, 1999
Tested by: Hung Trinh


hp

MARKER
349 MHz
-24.99 dBm

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 349 MHz
-24.99 dBm

No user
Menu

REF OFFST 30.0 dB
REF 50.0 dBm

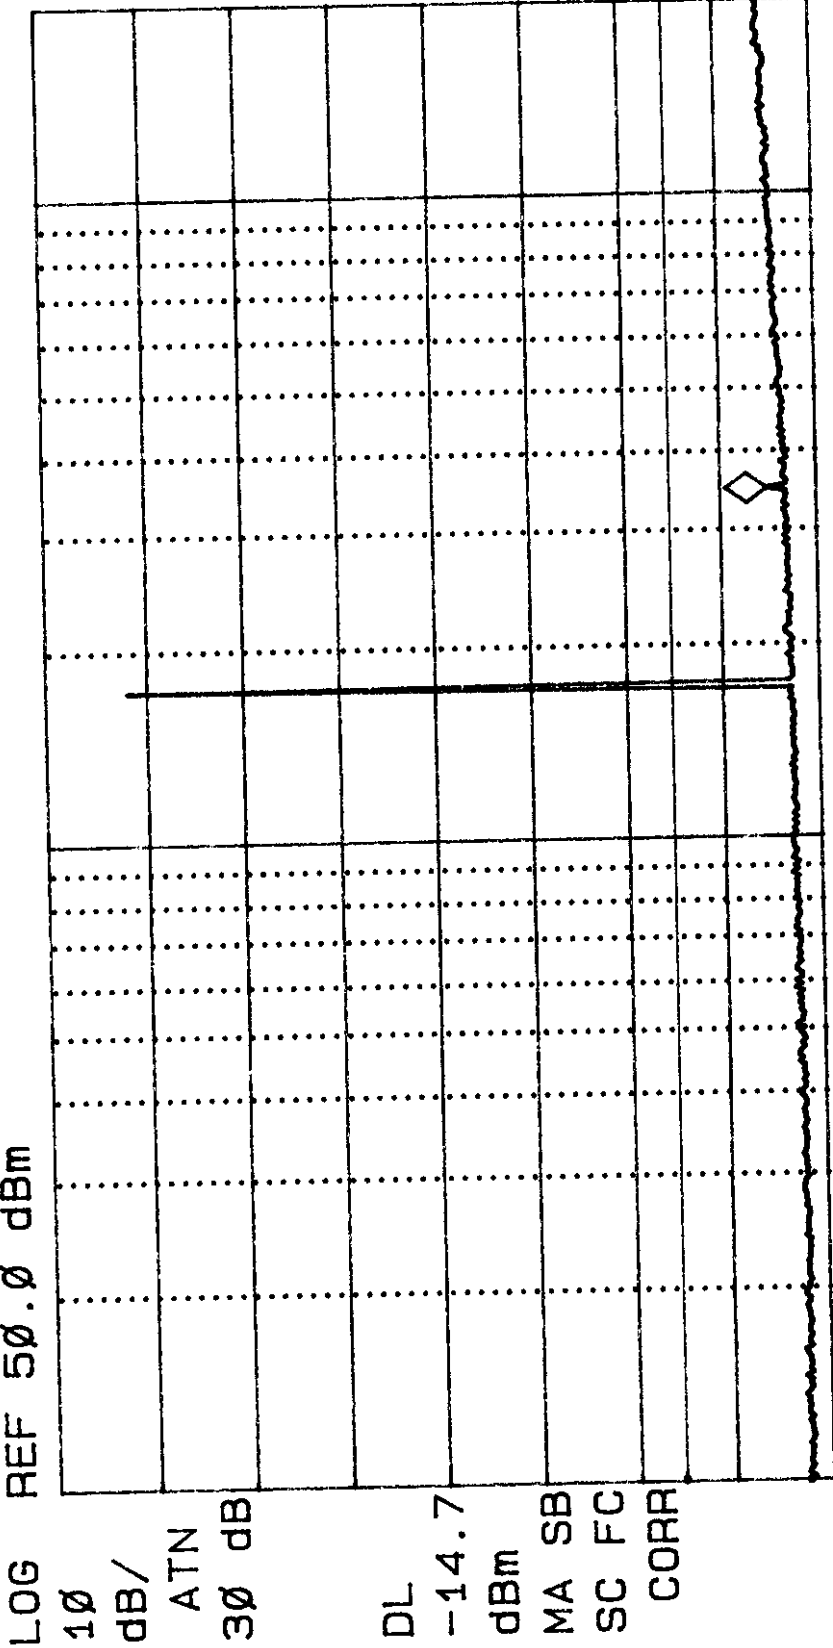

START 10 MHz #IF BW 30 KHz
STOP 2.000 GHz SWP 6.72 sec
AVG BW 30 KHz

4.6 TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS @ FCC 90.210

PRODUCT NAME: VHF CHANNEL MODULE (MOBILE RADIO TRANSLATOR),
Model No.: CM VHF HP

FCC REQUIREMENTS:

FCC Part 90, Sub. I, Para. 90.210

Emissions shall be attenuated below the mean output power of the transmitter as follows:

FREQUENCY RANGE (MHz)	RECOMMENDED OBW (KHz)	CHANNEL SPACING (KHz)	RECOMMENDED FREQ. DEVIATION (KHz)	FCC SPECIFICATION LIMITS (Para. No.)
150 - 174	20	25	5.0	$43+10*\log(P)$ in watts or -13 dBm
150 - 174	11.25	12.5	2.5	$50+10*\log(P)$ in watts or -20 dBm
150 - 174	6.25	7.5	1.25	$55+10\log(P)$ in watts or 65dB, whichever is the lesser attenuation (-22dBm)

For worst case of measurement the limit of -22 dBm is applied for all case.

CLIMATE CONDITION:

Standard Temperature and Humidity:

- Ambient temperature: 21 °C
- Relative humidity: 43%

POWER INPUT:

13.8 Vdc Battery.

TEST EQUIPMENT:

1. EMI Receiver System/Spectrum Analyzer, Hewlett Packard, Model 8546A, Input +25dBm max., 9KHz-5.6GHz, 50 Ohms, built-in Peak, Quasi-Peak & Average Detectors, Pre-Amplifier and Tracking Signal Generator. This System includes: (1) HP 85460A RF Filter Section, S/N: 3448A00236 and (2) HP 85462A Receiver RF Section/Display, S/N: 3520A00248.
2. Spectrum Analyzer, Advantest, Model R3271, S/N: 15050203, 100 Hz to 32 GHz)
3. Microwave Amplifier, HP, Model 83017A, Frequency Range 1 to 22GHz, 30dB gain nominal, low noise floor type.
4. Active Loop Antenna, Emco, Model 6502, SN 9104-2611, Frequency Range 1 KHz - 30 MHz, @ 50 Ohms.
5. BiconiLog Antenna, Emco, Model 3142, SN 10005, 30-2000 MHz @ 50 Ohms.
6. Log Periodic Antenna, AH System, Model SAS-200/518, SN: 343, Frequency Range: 1GHz-18GHz.
7. FCC Listed Open Field Test Site.
8. Audio Oscillator, HP, Model 204C, SN: 0989A08798, Output: 0-1.2 MHz, 5 Vrms.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT
July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

METHOD OF MEASUREMENTS:

Refer to ANSI 63.4, Para. 8 for detailed radiated emissions measurement procedures.

With transmitter modulation characteristics described in Out-of-Band Emissions measurements @ 2.989, the transmitter spurious and harmonic emissions were scanned. The spurious and harmonic emissions were measured with the Spectrum Analyzer controls set as RBW = 100 kHz, VBW = 100 kHz and SWEEP TIME = AUTO). The transmitter was operated at a full rated power output, and modulated as follows:

FCC CFR 47, Para. 2.997 - Frequency spectrum to be investigated

The spectrum was investigated from the lowest radio generated in the equipment up to at least the 10th harmonic of the carrier frequency or to the highest frequency practicable in the present state of the art of measuring techniques, whichever is lower. Particular attention should be paid to harmonics and subharmonics of the carrier frequency. Radiation at the frequencies of multiplier stages should be checked. The amplitude of spurious emissions which are attenuated more than 30 dB below the permissible value need not be reported.

FCC CFR 47, Para. 2.993 - Field Strength Spurious Emissions

- (a) Measurements was made to detect spurious emissions radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data were supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph 2.989(c) as appropriate. For equipment operating on frequencies below 1 GHz, an Open Field Test is normally required, with the measuring instrument antenna located in the far field at all test frequencies. In event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurement will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with the reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.
- (b) Measurements specified in paragraph (a) of this section shall be made for the following equipment:
 - (1) Those in which the spurious emission are required to be 60 dB or more below the mean power of the transmitter.
 - (2) All equipment operating on frequencies higher than 25 MHz
 - (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
 - (4) Other types of equipment as required, when deemed necessary by the Commission.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT
July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

METHOD OF CALCULATION FOR TRANSMITTED POWER (P) FROM THE MEASURED FIELD STRENGTH LEVEL (E):

According to IEC 801-3, the power density can be calculated as follows:

$$S = P / (4 \times \pi \times D^2) \quad \text{Where: } S: \text{ Power density in watts per square feet}$$

P : Transmitted power in watts
 π : 3.1415
 D : Distance in meters

The power density S (W/m^2) and electric field E (V/m) is related by:

$$S = E^2 / (120 \times \pi)$$

Accordingly, the field intensity of isotropic radiator in free space can be expressed as follows:

$$E = (30 \times P)^{1/2} / D = 5.5 \times (P)^{1/2} / D$$

For Halfwave dipole antenna or other antennas correlated to dipole in direction of maximum radiation:

$$S = (1.64 \times P) / (4 \times \pi \times D^2)$$
$$E = (49.2 \times P)^{1/2} / D = 7.01 \times (P)^{1/2} / D$$

$$P = (E \times D / 7.01)^2$$

Calculation of transmitted power P (dBm) given a measured field intensity E (dBuV/m):

$$\begin{aligned} P(W) &= [E(V/m) \times D / 7.01]^2 \\ P(mW) &= P(W) \times 1000 \\ \Rightarrow P(dBm) &= 10 \log P(mW) \\ &= 20 \log E(V/m) + 20 \log(D) - 20 \log(7.01) + 10 \log 1000 \\ &= E(dBV/m) + 20 \log D + 13 \\ &= E(dBuV/m) - 120 + 20 \log(D) + 13 \\ &= E(dBuV/m) + 20 \log(D) - 107 \end{aligned}$$

The Transmitted Power @ $D = 3$ Meters

$$P(dBm) = E(dBuV/m) - 97.5$$

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT

July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

TEST RESULTS: Conforms.

TEST PERSONNEL: Hung Trinh, EMI/RFI Technician

DATE: May 14, 1999

MEASUREMENT DATA

**TRANSMITTER UNWANTED (SPURIOUS/HARMONIC)
RADIATED EMISSIONS MEASUREMENTS @ 3 METERS**

TEST CONFIGURATION

- For measuring radiated emissions at frequencies below 1 GHz, the Spectrum Analyzer was set as 100 kHz RBW, 100 kHz VBW, SWEEP TIME: AUTO, PEAK DETECTOR.
- For measuring radiated emissions at frequencies above 1 GHz, the Spectrum Analyzer was set as 1 MHz RBW, 1 MHz VBW, SWEEP TIME: AUTO, PEAK DETECTOR.

REMARK: The most stringent limit of -22dBm was used for both 12.5 kHz and 25 kHz Channel Spacing.

RF In: 0 dBm @ 160 MHz RF Out: 43.2 dBm @ 150 MHz Modulation: FM modulation with 2.5 kHz Sine Wave Signal, Freq. Dev. = 2.5 kHz							
FREQUENCY (MHz)	RF LEVEL (dBuV/m)	RF LEVEL (dBm)	DETECTOR USED (PEAK/QP)	ANTENNA PLANE (H/V)	LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
300	41.4	-56.1	PEAK	V	-22.0	-34.1	PASS
300	43.2	-54.3	PEAK	H	-22.0	-32.3	PASS
450	38.1	-59.4	PEAK	V	-22.0	-37.4	PASS
450	38.2	-59.3	PEAK	H	-22.0	-37.3	PASS
The emissions were scanned from 10 MHz to 2 GHz and all emissions less than 40 dB below the limits were recorded.							

RF In: 0 dBm @ 160 MHz RF Out: 43.2 dBm @ 150 MHz Modulation: FM modulation with 9600 b/s random data, Freq. Dev. = 2.5 kHz							
FREQUENCY (MHz)	RF LEVEL (dBuV/m)	RF LEVEL (dBm)	DETECTOR USED (PEAK/QP)	ANTENNA PLANE (H/V)	LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
300	41.4	-56.1	PEAK	V	-22.0	-34.1	PASS
300	43.2	-54.3	PEAK	H	-22.0	-32.3	PASS
450	38.1	-59.4	PEAK	V	-22.0	-37.4	PASS
450	38.2	-59.3	PEAK	H	-22.0	-37.3	PASS
The emissions were scanned from 10 MHz to 2 GHz and all emissions less than 40 dB below the limits were recorded.							

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT
July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

RF In: 0 dBm @ 160 MHz							
RF Out: 43.2 dBm @ 162 MHz							
Modulation: FM modulation with 2.5 kHz Sine Wave Signal, Freq. Dev. = 2.5 kHz							
FREQUENCY (MHz)	RF LEVEL (dBuV/m)	RF LEVEL (dBm)	DETECTOR USED (PEAK/QP)	ANTENNA PLANE (H/V)	LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
324	34.2	-63.3	PEAK	V	-22.0	-41.3	PASS
324	34.6	-62.9	PEAK	H	-22.0	-40.9	PASS
486	37.9	-59.6	PEAK	V	-22.0	-37.6	PASS
486	36.9	-60.6	PEAK	H	-22.0	-38.6	PASS
The emissions were scanned from 10 MHz to 2 GHz and all emissions less than 40 dB below the limits were recorded.							

RF In: 0 dBm @ 160 MHz							
RF Out: 43.2 dBm @ 162 MHz							
Modulation: FM modulation with 9600 b/s random data, Freq. Dev. = 2.5 kHz							
FREQUENCY (MHz)	RF LEVEL (dBuV/m)	RF LEVEL (dBm)	DETECTOR USED (PEAK/QP)	ANTENNA PLANE (H/V)	LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
324	34.2	-63.3	PEAK	V	-22.0	-42.3	PASS
324	34.6	-62.9	PEAK	H	-22.0	-40.9	PASS
486	37.9	-59.6	PEAK	V	-22.0	-37.6	PASS
486	36.9	-60.6	PEAK	H	-22.0	-38.6	PASS
The emissions were scanned from 10 MHz to 2 GHz and all emissions less than 40 dB below the limits were recorded.							

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT

July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

RF In: 0 dBm @ 160 MHz							
RF Out: 43.2 dBm @ 174 MHz							
Modulation: FM modulation with 2.5 kHz Sine Wave Signal, Freq. Dev. = 2.5 kHz							
FREQUENCY (MHz)	RF LEVEL (dBuV/m)	RF LEVEL (dBm)	DETECTOR USED (PEAK/QP)	ANTENNA PLANE (H/V)	LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
348	33.8	-63.7	PEAK	V	-22.0	-41.7	PASS
348	33.8	-63.7	PEAK	H	-22.0	-41.7	PASS
522	38.6	-58.9	PEAK	V	-22.0	-36.9	PASS
522	38.7	-58.8	PEAK	H	-22.0	-36.8	PASS
The emissions were scanned from 10 MHz to 2 GHz and all emissions less than 40 dB below the limits were recorded.							

RF In: 0 dBm @ 160 MHz							
RF Out: 43.2 dBm @ 174 MHz							
Modulation: FM modulation with 9600 b/s random data, Freq. Dev. = 2.5 kHz							
FREQUENCY (MHz)	RF LEVEL (dBuV/m)	RF LEVEL (dBm)	DETECTOR USED (PEAK/QP)	ANTENNA PLANE (H/V)	LIMIT (dBm)	MARGIN (dB)	PASS/ FAIL
348	33.8	-63.7	PEAK	V	-22.0	-41.7	PASS
348	33.8	-63.7	PEAK	H	-22.0	-42.7	PASS
522	38.6	-58.9	PEAK	V	-22.0	-36.9	PASS
522	38.7	-58.8	PEAK	H	-22.0	-36.8	PASS
The emissions were scanned from 10 MHz to 2 GHz and all emissions less than 40 dB below the limits were recorded.							

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT

July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5. EXHIBIT 5 - GENERAL TEST PROCEDURES

5.1 ELECTRICAL FIELD RADIATED EMISSIONS MEASUREMENTS - GENERAL TEST METHOD

- The radiated emission measurements were performed at the Ultratech's 3 Meter Open Field Test Site (OFTS) situated in the Town of Oakville, province of Ontario. The Attenuation Characteristics of OFTS have been filed to FCC.
- Radiated emissions measurements were made using the following test instruments:
 1. Calibrated EMCO biconilogl antenna in the frequency range from 30 MHz to 2000 MHz.
 2. Calibrated A.H. Systems log periodic antenna in the frequency range above 1000 MHz (1GHz - 18 GHz).
 3. Calibrated EMI receiver or spectrum analyzer and pre-selector. In general, the spectrum analyzer would be used as follows:
 - The rf electric field levels were measured with the spectrum analyzer set to PEAK detector (100 KHz RBW and 100 KHz VBW).
 - If any rf emission was observed to be a broadBand noise, the spectrum analyzer's CISPR QUASI-PEAK detector (120 KHz RBW and 1MHz VBW) was then set to measure the signal level.
 - If the signal being measured was narrowband and the ambient field was broadBand, the bandwidth of the spectrum analyzer was reduced.
- The EUT was set-up in its typical configuration and operated in its various modes as described in 3.2 of the test report.
- The frequencies of emissions was first detected. Then the amplitude of the emissions was measured at the specified measurement distance using required antenna height, polarization, and detector characteristics.
- During this process, cables and peripheral devices were manipulated within the range of likely configuration.
- For each mode of operation required to be tested, the frequency spectrum was monitored. Variations in antenna heights (from 1 meter to 4 meters above the ground plane), antenna polarization (horizontal plane and vertical plane), cable placement and peripheral placement (each variable within bounds specified elsewhere) were explored to produce the highest amplitude signal relative to the limit.

The maximum radiated emission for a given mode of operation was found by using the following step-by-step procedure:

Step1: Monitor the frequency range of interest at a fixed antenna height and EUT azimuth.

Step2: Manipulate the system cables to produce highest amplitude signal relative to the limit. Note the amplitude and frequency of the suspect signal.

Step3: Rotate the EUT 360 degrees to maximize the suspected highest amplitude signal. If the signal or another at a different frequency is observed to exceed the previously noted highest amplitude signal by 1 dB or more, go back to the azimuth and repeat Step 2. Otherwise, orient the EUT azimuth to repeat the highest amplitude observation and proceed.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT

July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

- Step4: Move the antenna over its full allowed range of travel (1 to 4 meters) to maximize the suspected highest amplitude signal. If the signal or another at a different frequency is observed to exceed the previously noted highest amplitude signal by 1 dB or more, return to Step 2 with the highest amplitude observation and proceed.
- Step5: Change the polarization of the antenna and repeat Step 2 through 4. Compare the resulting suspected highest amplitude signal with that found for the other polarization. Select and note the higher of the two signals. This signal is termed the highest observed signal with respect to the limit for this EUT operational mode.
- Step6: The effects of various modes of operation is examined. This is done by varying the equipment modes as steps 2 through 5 are being performed.
- Step7: After completing steps 1 through 6, record the final highest emission level, frequency, antenna polarization and detector mode of the measuring instrument.

Calculation of Field Strength:

The field strength is calculated by adding the calibrated antenna factor and cable factor, and subtracting the Amplifier gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where	FS	=	Field Strength
	RA	=	Receiver/Analyzer Reading
	AF	=	Antenna Factor
	CF	=	Cable Attenuation Factor
	AG	=	Amplifier Gain

Example: If a receiver reading of 60.0 dBuV is obtained, the antenna factor of 7.0 dB/m and cable factor of 1.0 dB are added, and the amplifier gain of 30 dB is subtracted. The actual field strength will be:

$$\text{Field Level} = 60 + 7.0 + 1.0 - 30 = 38.0 \text{ dBuV/m.}$$

$$\text{Field Level} = 10^{(38/20)} = 79.43 \text{ uV/m.}$$

Notes: The frequency and amplitude of at least six highest conducted emissions relative to the limit are recorded unless such emissions are more than 30 dB below the limit. If less than six emissions are within 20dB of the limit, the background or receiver noise level shall be reported at representative frequencies.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yhk.ultratech@sympatico.ca, Website: <http://www.ultratech-labs.com>

File #: FSG-22BFT

July 14, 1999

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia)
- Recognized/Listed by FCC (USA), Industry Canada (Canada)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)