



101 Courageous Drive League City, Texas 77573
Tel: 281.538.6000 Fax: (281) 334-5302 www.etoolz.com

L-Band Iridium Repeater *Exchange System*

Description

The Eagle Broadband L-Band Iridium Exchange System is designed to serve as a lightweight, high capacity, high reliability, satellite earth-station repeater, featuring MIC design low-noise and power amplifiers. The Exchange System employs narrowband filtering that ensures strict pass band of the Iridium band. The amplifiers employ GaAs MMICs (Monolithic Microwave Integrated Chips) and thin-film technology in a balanced configuration to provide highly stable power with minimal intermodulation distortion.

The Exchange System is designed for use with the Iridium satellite constellation. It can be set up to operate in various temporary or permanent environments. Temporary applications can be installed in a matter of minutes. The Exchange System is capable of handling multi-user voice and data connections.

Single Unit Construction

Since the repeater is a single unit in a lightweight aluminum housing, it is suitable for installation in any military/ commercial/ private aircraft electronic bay, mobile/ permanent military installations, and security commercial applications. Its housing meets or exceeds all ARINC 404 and ARINC 600 standards.

This entire document is the copyrighted property of and proprietary information of etoolz, Inc., League City, TX, a wholly owned subsidiary of Eagle Broadband, Inc. The contents may not be disclosed in whole or in part without the written consent of etoolz, Inc. It cannot be duplicated or used in whole or in part, for any purpose other than that which is approved by etoolz, Inc. This document in part or whole is for confidential internal use and reference, and shall be returned to etoolz, Inc. upon request.



101 Courageous Drive League City, Texas 77573
Tel: 281.538.6000 Fax: (281) 334-5302 www.etoolz.com

L-Band Iridium Repeater *Exchange System*

Certifications

The Eagle Broadband L-Band Iridium Exchange System is currently pursuing certifications on its prototype version. Certifications include:

- Iridium Certification
- FCC Certification
- JAA Certification
- Mil-Spec Certification

This entire document is the copyrighted property of and proprietary information of etoolz, Inc., League City, TX, a wholly owned subsidiary of Eagle Broadband, Inc. The contents may not be disclosed in whole or in part without the written consent of etoolz, Inc. It cannot be duplicated or used in whole or in part, for any purpose other than that which is approved by etoolz, Inc. This document in part or whole is for confidential internal use and reference, and shall be returned to etoolz, Inc. upon request.



101 Courageous Drive League City, Texas 77573
Tel: 281.538.6000 Fax: (281) 334-5302 www.etoolz.com

L-Band Iridium Repeater *Exchange System*

RF Characteristics

Transmit (Exterior)

Output Frequency Range	1616-1626.5 MHz
Output Power (at -1dB Gain Compression)	5 Watts
Input Frequency Range	1616-1626.5 MHz
Signal Bandwidth	10.5 MHz
Minimum Input Power (MDS)	-118.5 dBm
Gain Flatness:	
Over any 2 MHz Bandwidth	+/- 0.4 dB
Over any 10MHz Bandwidth	+/- 0.5 dB
Spurious Outputs @ 5 Watt Output Power	-40 dBc, max
Harmonics @ 5 Watt Output Power	-60 dBc, max
VSWR (Input & Output)	1.8:1
Voltage Input	+28 VDC
DC Consumption	42 Watts

This entire document is the copyrighted property of and proprietary information of etoolz, Inc., League City, TX, a wholly owned subsidiary of Eagle Broadband, Inc. The contents may not be disclosed in whole or in part without the written consent of etoolz, Inc. It cannot be duplicated or used in whole or in part, for any purpose other than that which is approved by etoolz, Inc. This document in part or whole is for confidential internal use and reference, and shall be returned to etoolz, Inc. upon request.



101 Courageous Drive League City, Texas 77573
Tel: 281.538.6000 Fax: (281) 334-5302 www.etoolz.com

L-Band Iridium Repeater *Exchange System*

Receive (Interior)

Input Frequency Range	1616-1626.5 MHz
Output Power (at -1dB Gain Compression)	10 mWatts
Output Frequency Range	1616-1626.5 MHz
Signal Bandwidth	10.5 MHz
Minimum Input Power (MDS)	-118.5 dBm
Gain Flatness:	
Over any 2 MHz Bandwidth	+/- 0.4 dB
Over any 10MHz Bandwidth	+/- 0.5 dB
Overall Noise Figure	2.0 dB, max
Harmonics	-45 dBc
VSWR	1.8:1
Voltage Input	+28 VDC
DC Consumption	5 Watts


This entire document is the copyrighted property of and proprietary information of etoolz, Inc., League City, TX, a wholly owned subsidiary of Eagle Broadband, Inc. The contents may not be disclosed in whole or in part without the written consent of etoolz, Inc. It cannot be duplicated or used in whole or in part, for any purpose other than that which is approved by etoolz, Inc. This document in part or whole is for confidential internal use and reference, and shall be returned to etoolz, Inc. upon request.



101 Courageous Drive League City, Texas 77573
Tel: 281.538.6000 Fax: (281) 334-5302 www.etoolz.com

L-Band Iridium Repeater Exchange System

EXCHANGE SYSTEM (SIMPLIFIED)

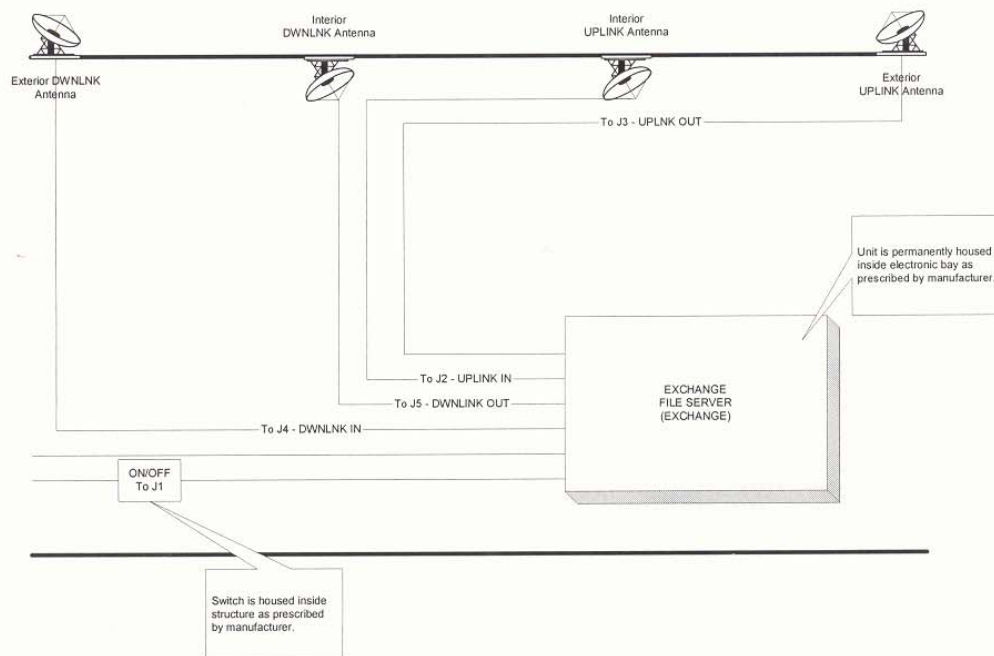

This entire document is the copyrighted property of and proprietary information of etoolz, Inc., League City, TX, a wholly owned subsidiary of Eagle Broadband, Inc. The contents may not be disclosed in whole or in part without the written consent of etoolz, Inc. It cannot be duplicated or used in whole or in part, for any purpose other than that which is approved by etoolz, Inc. This document in part or whole is for confidential internal use and reference, and shall be returned to etoolz, Inc. upon request.

FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operations is subject to the following two conditions: (1) This device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation

CAUTION

Any changes or modifications not expressly approved by the manufacturer responsible for compliance could void the user's authority to operate the equipment.