

0.75

R43
330

+74V

R44
10K

1.0W

VICOUT5

Q5
IRFD210

R38
3K

+74V

R42
10K

1.0W




VICOUT2

Q7
IRFD210





R40
3K

R38
3K

OUT/PE

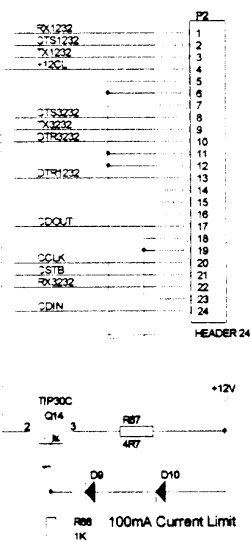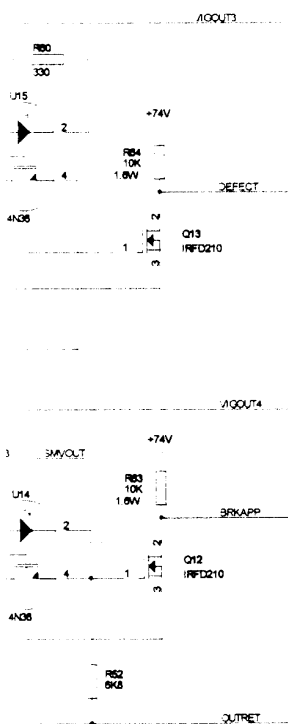

ER CPU TRANSIENT SUPPRESSOR				
Drawn	EIH	27FEB95	P/N: 5821617,582161701	
Checked	WMJ	27FEB95	SIZE:C	REV: 1
Approved	DRB	02MAR95	DWG# Q-89216-17-A01	
DATE: Wednesday, December 10, 1997			SHEET 2	OF 2

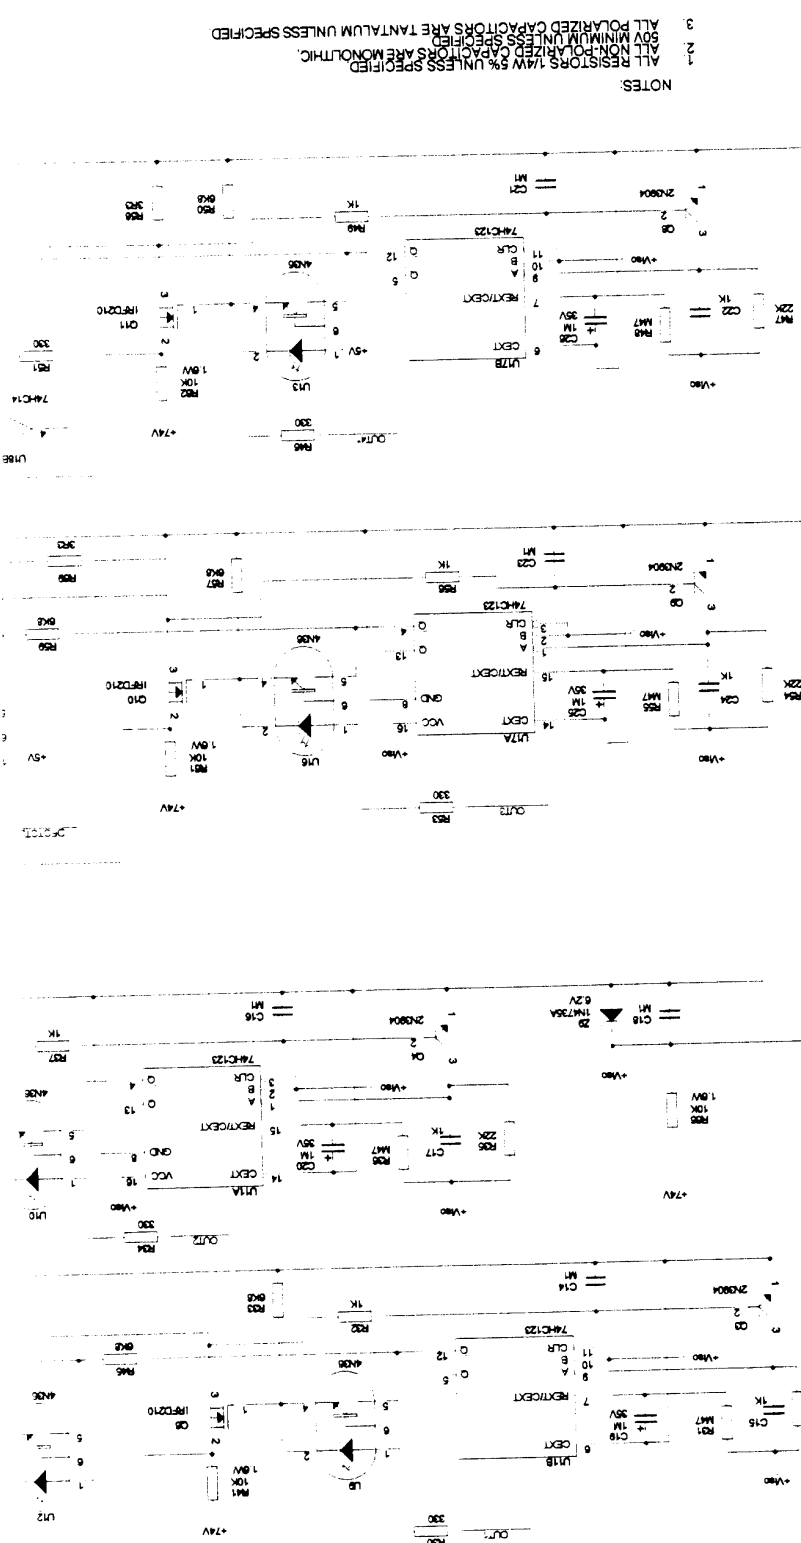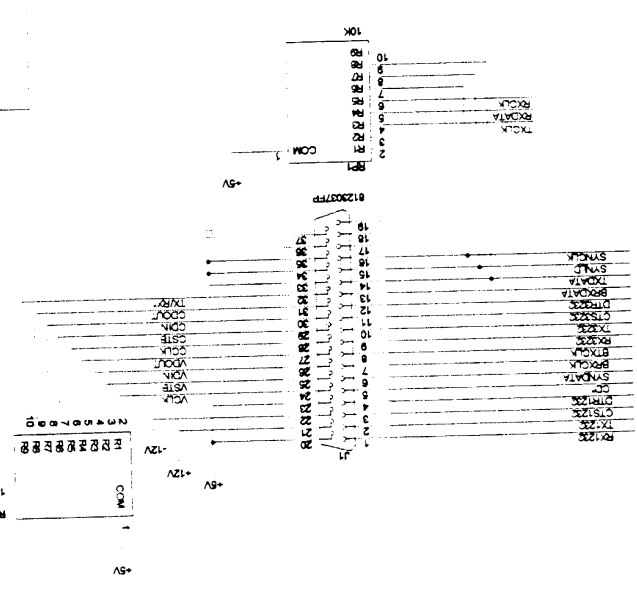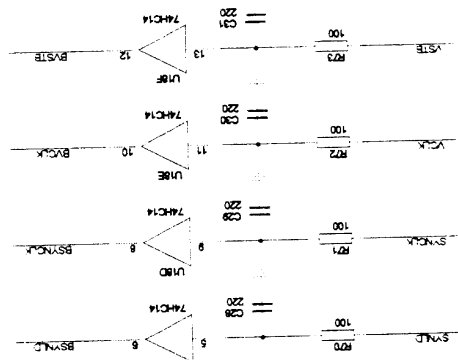

NOTES:
 1. ALL RESISTORS 1/4W 5% UNLESS SPECIFIED
 2. ALL NON-POLARIZED CAPACITORS ARE MONOLITHIC.
 3. ALL POLARIZED CAPACITORS ARE TANTALUM UNLESS SPECIFIED