



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0012606(4) Date : 02 Mar 2015

Application No. : LS040587(2)

Applicant : Smarthome Products Ltd
Rm B808-9, 8/F., Sea View Estate 2-8 Watson Road, North Point
Hong Kong

Sample Description : One(1) item of submitted sample stated to be :

Sample Description	Model number
433MHz Wireless Door Chime Receiver	LA204 / LA204WH / LA204RWH and WP180USL

Radio Frequency : 433.92MHz Receiver

Rating : AC 120V

No. of submitted sample : Three (3) piece (s)

Date Received : 12 Feb 2015.

Test Period : 16 Feb 2015 to 26 Feb 2015.

Test Requested : FCC Part 15 Certification.

Test Method : 47 CFR Part 15 (10-1-12 Edition), ANSI C63.4 – 2009

Test Result : See attached sheet(s) from page 2 to 24.

Conclusion : The submitted sample was found to comply with requirement of FCC Part 15 Subpart B.

Remark : All four models are same in circuitry and components and construction, and therefore model LA204 was chosen to be representative of the test sample. The difference(s) between the tested model and the declared model(s) is/are Model no., and Outlook.

For and on behalf of
CMA Industrial Development Foundation Limited

Authorized Signature : _____

Mr. WONG Lap-pong, Andrew
Manager
Electrical Division

Page 1 of 24

FCC ID: LQP-WP8901-WC201



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0012606(4)

Date : 02 Mar 2015

Table of Contents

1	General Information	3
1.1	General Description	3
1.2	Location of the test site	4
1.3	List of measuring equipment.....	5
1.4	Measurement Uncertainty.....	6
2	Description of the radiated emission test	7
2.1	Test Procedure	7
2.2	Test Result	8
2.3	Radiated Emission Measurement Data	9
3	Description of the Line-conducted Test	10
3.1	Test Procedure	10
3.2	Test Result	10
3.3	Graph and Table of Conducted Emission Measurement Data	10
4	Photograph	11
4.1	Photographs of the Test Setup for Radiated Emission and Conducted Emission.....	11
4.2	Photographs of the External and Internal Configurations of the EUT.....	11
5	Supplementary document.....	12
5.1	Bandwidth.....	12
5.2	Duty cycle.....	12
5.3	Transmission time.....	12
6	Appendices.....	13



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0012606(4)

Date : 02 Mar 2015

1 General Information

1.1 General Description

The equipment under test (EUT) is a receiver for doorbell. It operates at 433.92MHz and the oscillation of radio receiving circuit is generated by a crystal. The EUT is powered by AC 120V. When the EUT received the radio signal from transmitter, it will decode the signal and play the sound..

The brief circuit description is listed as follows:

- U6 and its associated circuit act as RF receiver
- Y1 and its associated circuit act as oscillator
- F1 and its associated circuit act as RF filter
- U5 and its associated circuit act as voice MCU
- U1 and its associated circuit act as MCU
- U2 and its associated circuit act as flash memory



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0012606(4)

Date : 02 Mar 2015

1.2 Location of the test site

FCC Registration Number: 552221

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009. A Semi-Anechoic Chamber Testing Site is set up for investigation and located at:

Ground Floor, Yan Hing Centre,
9 – 13 Wong Chuk Yeung Street,
Fo Tan, Shatin,
New Territories,
Hong Kong.

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.4 – 2009. A shielded room is located at :

Ground Floor, Yan Hing Centre,
9 – 13 Wong Chuk Yeung Street,
Fo Tan, Shatin,
New Territories,
Hong Kong.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0012606(4)

Date : 02 Mar 2015

1.3 List of measuring equipment

Equipment	Manufacturer	Model No.	Serial No.	Calibration Due Date	Calibration Period
EMI Test Receiver	R&S	ESCI	100152	28 Aug 2015	1Year
Broadband Antenna	Schaffner	CBL6112B	2692	19 Feb 2016	2Years
Coaxial Cable	Schaffner	RG 213/U	N/A	19 Feb 2016	1Year
Coaxial Cable	Suhner	RG 214/U	N/A	19 Feb 2016	1Year
Artificial Mains Network	R&S	ENV216	101232	13 Nov 2015	1Year
Coaxial Cable	Tyco Electronics	RG 58C/U	N/A	13 Nov 2015	1Year



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0012606(4)

Date : 02 Mar 2015

1.4 Measurement Uncertainty

The reported uncertainty is based on a standard uncertainty multiplied by a coverage factor $k=2$, providing a level of confidence of approximately 95%.

Radiated emissions

Frequency	Uncertainty (U_{lab})
30MHz ~ 200MHz (Horizontal)	4.63dB
30MHz ~ 200MHz (Vertical)	4.65dB
200MHz ~ 1000MHz (Horizontal)	4.45dB
200MHz ~ 1000MHz (Vertical)	4.41dB

Conducted emissions

Frequency	Uncertainty (U_{lab})
150kHz ~ 30MHz	2.47dB



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0012606(4)

Date : 02 Mar 2015

2 Description of the radiated emission test

2.1 Test Procedure

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009.

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 1m and 0.8m high above the ground. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1 m above the ground.

The device was rotated through three orthogonal axes to determine which attitude and configuration produce the highest emission during measurement.

A signal generator was used to radiate an unmodulated continuous wave (CW) signal to the EUT (super-regenerative receiver) at its operating frequency in order to “cohere” the characteristic broadband emissions from the receiver.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0012606(4)

Date : 02 Mar 2015

2.2 Test Result

Quasi-Peak Detector data was measured unless otherwise stated.

“#” means emissions appearing within the restricted bands shall follow the requirement of section 15.205.

The emissions meeting the requirement of section 15.109 are based on measurements employing the CISPR quasi-peak detector below 1000MHz and average detector for frequencies above 1000MHz

The frequencies from 30MHz to 1000MHz were investigated, and emission more than 20dB below limit were not reported. Thus those highest emission were present in next page (section 2.3)

It was found that the EUT meet the FCC requirement.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0012606(4)

Date : 02 Mar 2015

2.3 Radiated Emission Measurement Data

Radiated emission

Environmental conditions:

Parameter	Recorded value	
Ambient temperature:	23	° C
Relative humidity:	73	%

Detector: Quasi-Peak

RBW: 100kHz VBW: 300kHz Operation mode: Receiving

Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBμV)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
44.644	H	4.5	15.9	20.4	40.0	- 19.6
82.507	H	7.0	8.9	15.9	40.0	- 24.1
#116.603	H	8.3	12.7	21.0	43.5	- 22.5
164.988	H	6.6	12.7	19.3	43.5	- 24.2
220.636	H	7.0	11.6	18.6	46.0	- 27.4
244.306	H	8.6	13.0	21.6	46.0	- 24.4
316.277	H	7.3	17.1	24.4	46.0	- 21.6

Remark: Other emission more than 20dB below the limit are not reported.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0012606(4)

Date : 02 Mar 2015

3 Description of the Line-conducted Test

3.1 Test Procedure

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.4 – 2009. The EUT was setup as described in the procedures, and both lines were measured.

3.2 Test Result

The EUT is connected to 120V AC.

It was found that the EUT met the FCC requirement.

3.3 Graph and Table of Conducted Emission Measurement Data

For electronic filing, the document is saved with filename TestRpt2.pdf.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0012606(4)

Date : 02 Mar 2015

4 Photograph

4.1 Photographs of the Test Setup for Radiated Emission and Conducted Emission

For electronic filing, the photos are saved with filename TSup1.jpg to TSup5.jpg.

4.2 Photographs of the External and Internal Configurations of the EUT

For electronic filing, the photos are saved with filename ExPho1.jpg to ExPho4.jpg and InPho1.jpg to InPho4.jpg.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0012606(4)

Date : 02 Mar 2015

5 Supplementary document

The following document were submitted by applicant, and for electronic filing, the document are saved with the following filenames:

Document	Filename
ID Label/Location	LabelSmp.jpg
Block Diagram	BlkDia.pdf
Schematic Diagram	Schem.pdf
Users Manual	UserMan.pdf
Operational Description	OpDes.pdf

5.1 Bandwidth

Not applicable.

5.2 Duty cycle

Not applicable.

5.3 Transmission time

Not applicable.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0012606(4)

Date : 02 Mar 2015

6 Appendices

A1	Photos of the set-up of Radiated Emissions	1	page
A2	Photos of the set-up of Conducted Emissions	2	pages
A3	Photos of External Configurations	2	pages
A4	Photos of Internal Configurations	2	pages
A5	ID Label/Location	2	pages
A6	Conducted Emission Measurement Data	2	pages



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AT0012606(4)

Date : 02 Mar 2015

A1. Photos of the set-up of Radiated Emissions

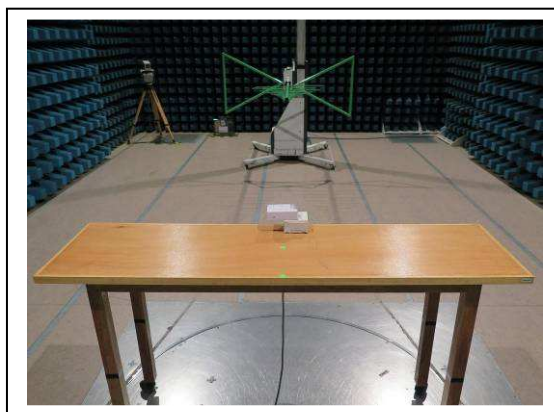

(Front view)

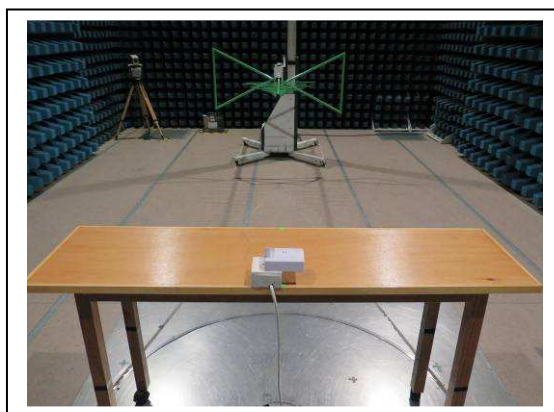

(Back view)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT


Report No. : AT0012606(4)

Date : 02 Mar 2015

A2. Photos of the set-up of Conducted Emissions



(Front view)

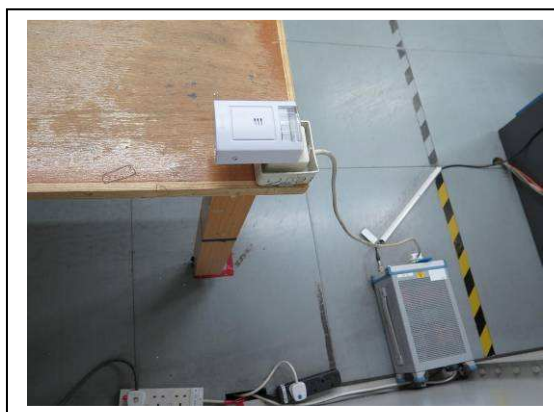

(Back view)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT

Report No. : AT0012606(4)

Date : 02 Mar 2015

A2. Photos of the set-up of Conducted Emissions

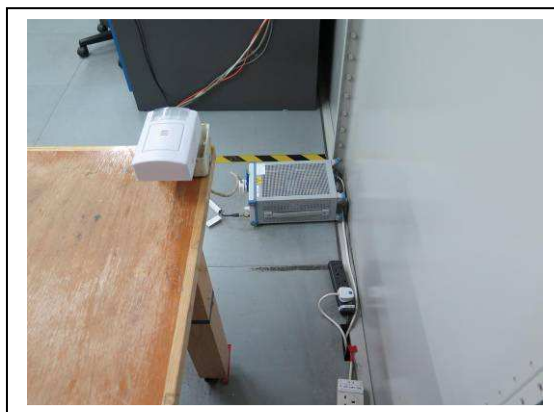

(Side view)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 16 of 24

FCC ID: LQP-WP8901-WC201

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatcl.com.
This document shall not be reproduced except in full or with written approval by CMA Testing

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: <http://www.cmatcl.com>



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0012606(4)

Date : 02 Mar 2015

A3. Photos of External Configurations



External Configuration 1
(LA204, LA204WH and LA204RWH)



External Configuration 2
(LA204, LA204WH and LA204RWH)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0012606(4)

Date : 02 Mar 2015

A3. Photos of External Configurations



External Configuration 3
(WP180USL)



External Configuration 4
(WP180USL)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AT0012606(4)

Date : 02 Mar 2015

A4. Photos of Internal Configurations

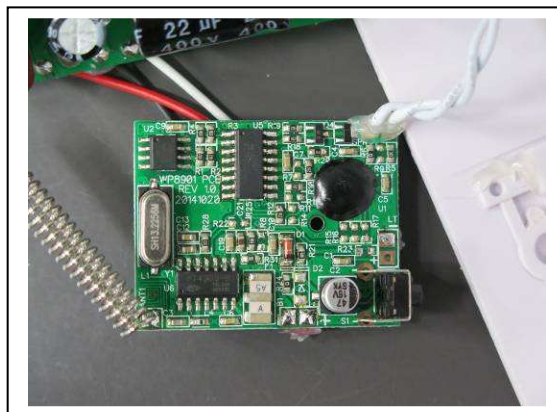

Internal Configuration 1

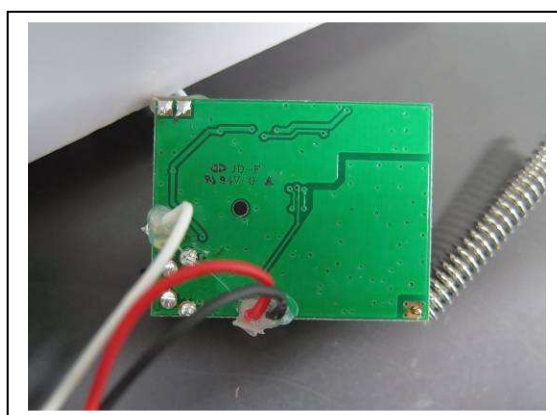

Internal Configuration 2

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AT0012606(4)

Date : 02 Mar 2015

A4. Photos of Internal Configurations

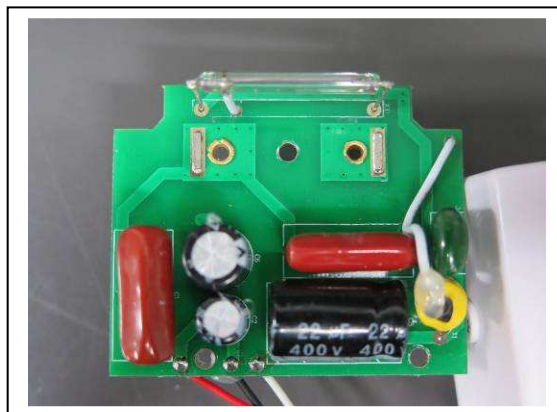

Internal Configuration 3

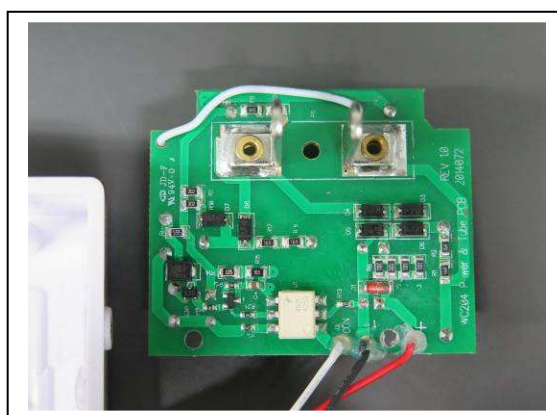

Internal Configuration 4

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT

Report No. : AT0012606(4)

Date : 02 Mar 2015

A5. ID Label / Location

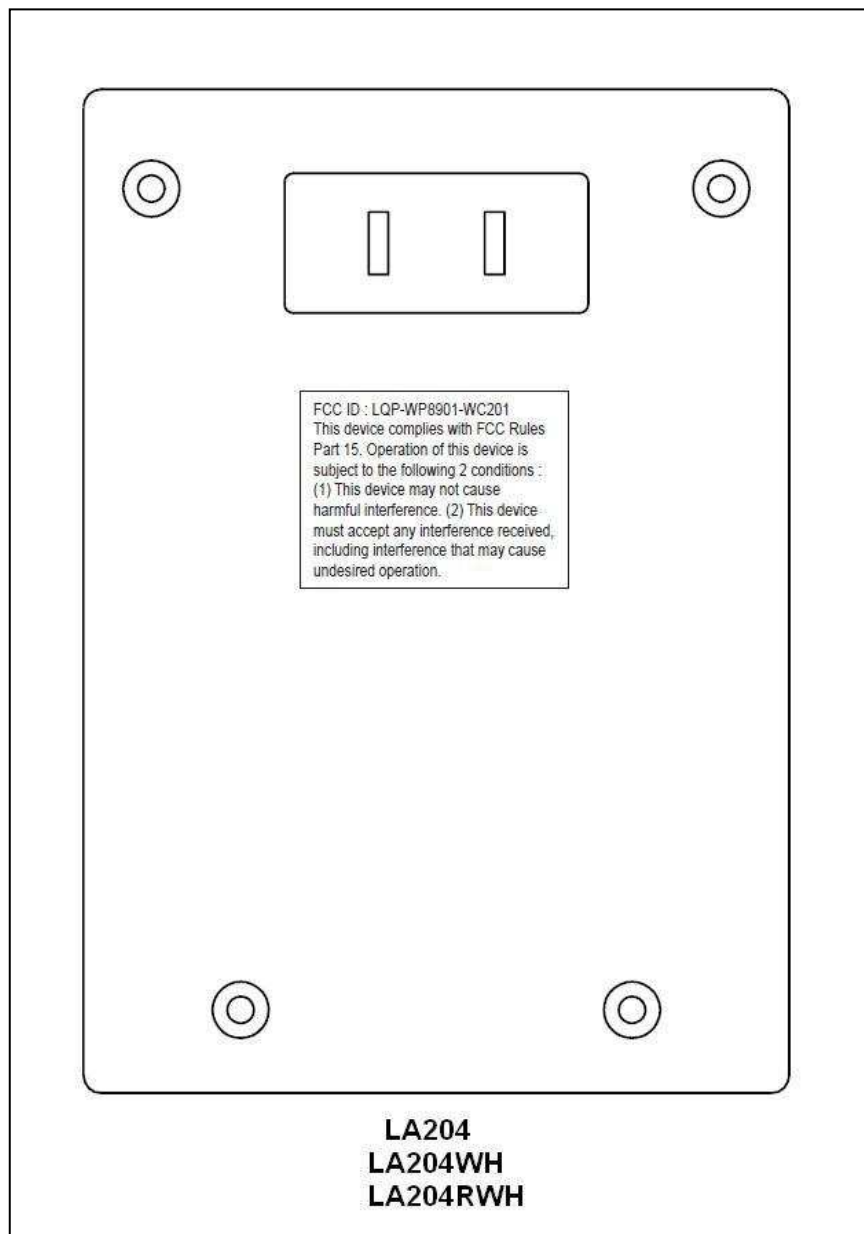

ID Label 1

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT

Report No. : AT0012606(4)

Date : 02 Mar 2015

A5. ID Label / Location

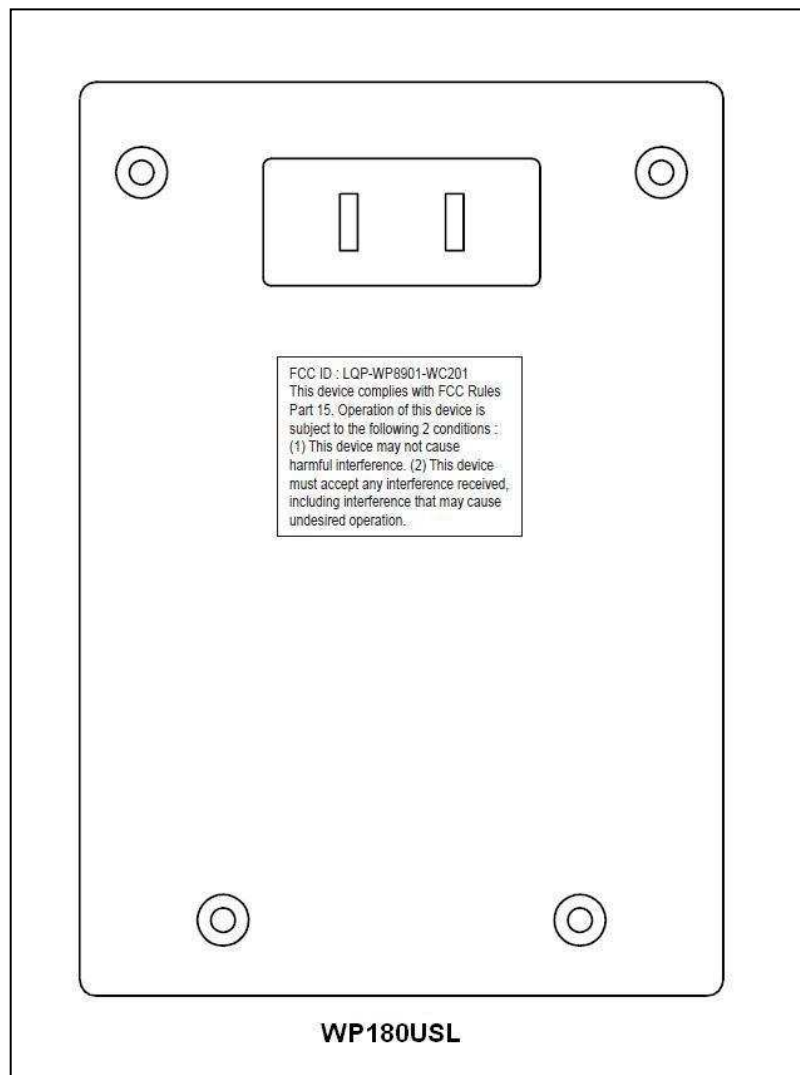

ID Label 2

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0012606(4)

Date : 02 Mar 2015


A6. Conducted Emission Measurement Data



RBW 9 kHz

MT 1 s

Att 10 dB AUTO PREAMP OFF

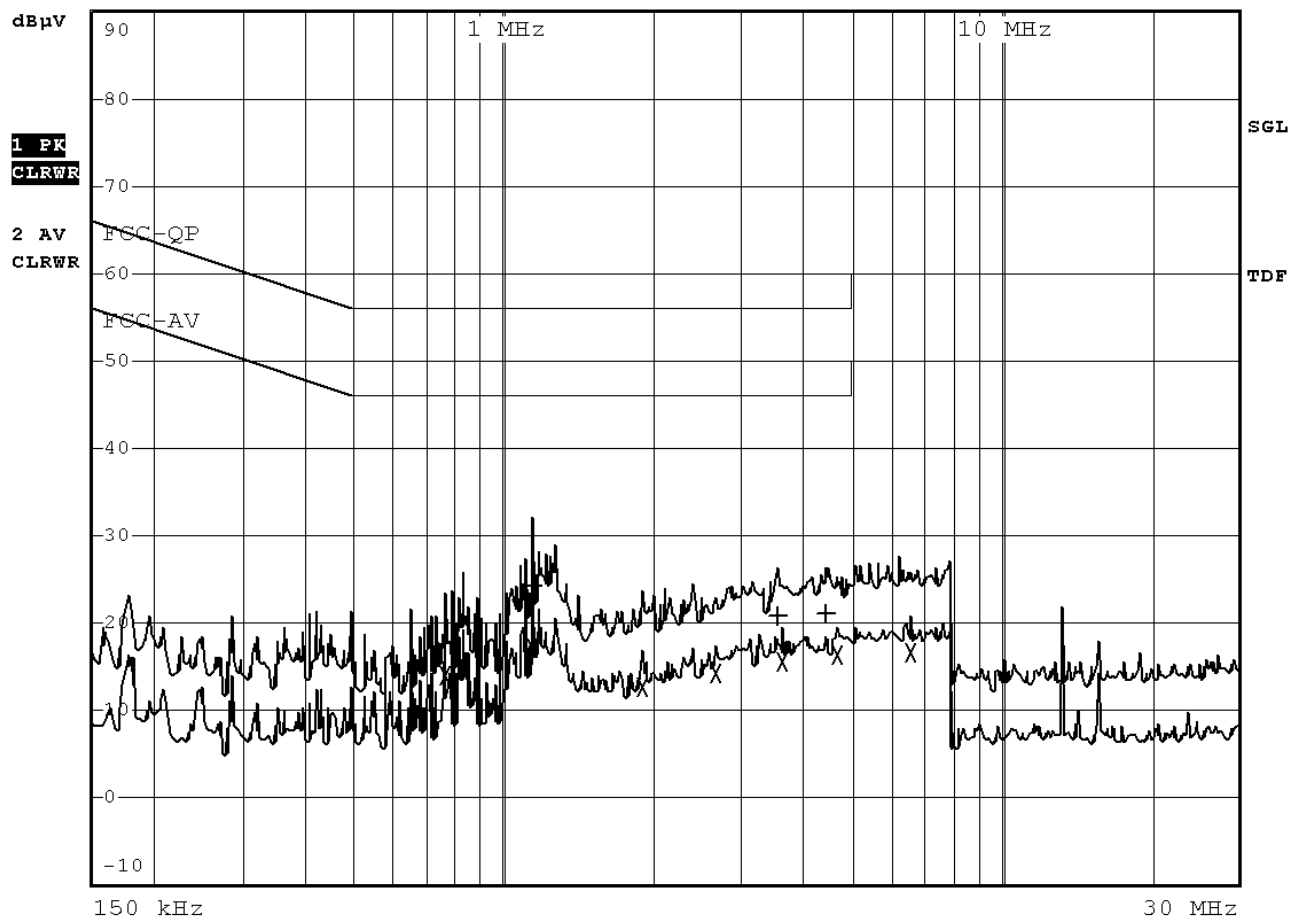

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0012606(4)

Date : 02 Mar 2015

A6. Conducted Emission Measurement Data

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	FCC-QP			
Trace2:	FCC-AV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBμV	DELTA LIMIT dB	
2 Average	761 kHz	13.97 N gnd	-32.02	
2 Average	828.5 kHz	14.88 L1 gnd	-31.11	
1 Quasi Peak	1.085 MHz	22.78 N gnd	-33.21	
2 Average	1.139 MHz	17.08 L1 gnd	-28.91	
1 Quasi Peak	1.148 MHz	24.33 N gnd	-31.66	
2 Average	1.9085 MHz	12.73 L1 gnd	-33.26	
2 Average	2.66 MHz	14.28 L1 gnd	-31.71	
1 Quasi Peak	3.5465 MHz	20.73 L1 gnd	-35.26	
2 Average	3.6185 MHz	15.54 L1 gnd	-30.45	
1 Quasi Peak	4.4645 MHz	21.16 L1 gnd	-34.83	
2 Average	4.676 MHz	16.26 L1 gnd	-29.73	
2 Average	6.575 MHz	16.56 L1 gnd	-33.43	

***** End of Report *****

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew