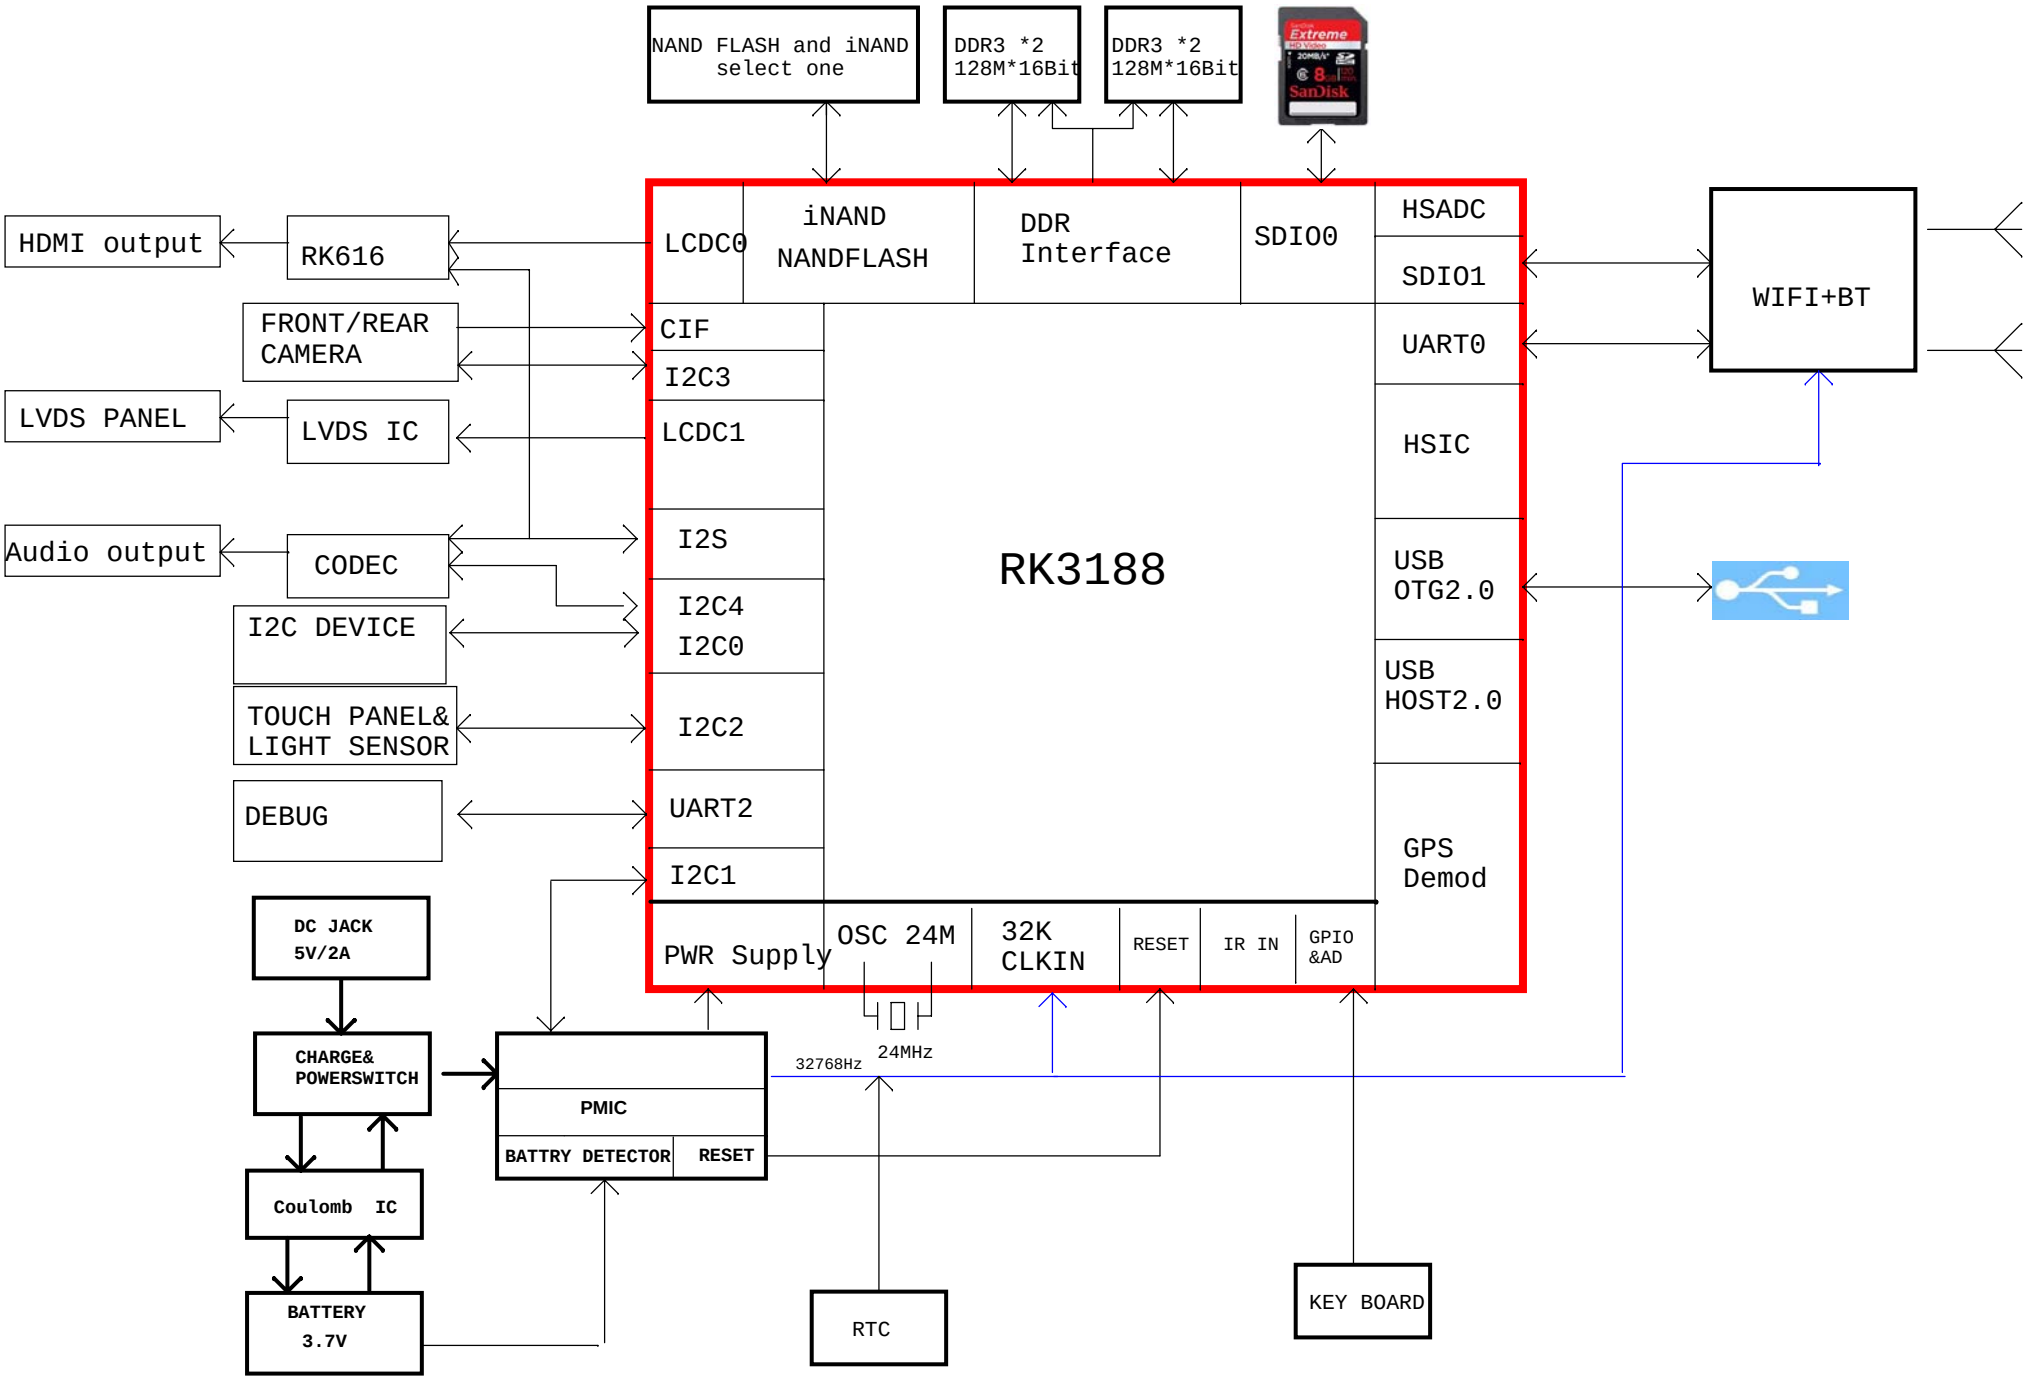
NAND FLASH and iNAND
select one
DDR3 *2
128M*16Bit
DDR3 *2
128M*16Bit
HDMI output
RK616
FRONT/REAR
CAMERA
LVDS PANEL
LVDS IC
Audio output
CODEC
I2C DEVICE
TOUCH PANEL&
LIGHT SENSOR
DEBUG
LCDC0
iNAND
NANDFLASH
DDR
Interface
SDIO0
HSADC
SDIO1
UART0
HSIC
CIF
I2C3
LCDC1
I2S
I2C4
I2C0
I2C2
UART2
I2C1
RK3188
USB
OTG2.0
USB
HOST2.0
GPS
Demod
PWR Supply
OSC 24M
32K
CLKIN
RESET
IR IN
GPIO
&AD
WIFI+BT
DC JACK
5V/2A
CHARGE&
POWERSWITCH
Coulomb IC
BATTERY
3.7V
PMIC
BATTRY DETECTOR
RESET
32768Hz
24MHz
RTC
KEY BOARD