



Emerson Automation Solutions/Rosemount Inc.

Model 248DX

**FCC 15.247:2019
2.4 GHz DTS Radio**

Report # EMPM0071.1



NVLAP LAB CODE: 200881-0



This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. This Report shall not be reproduced, except in full without written approval of the laboratory.

CERTIFICATE OF TEST

Last Date of Test: October 17, 2019
Emerson Automation Solutions/Rosemount Inc.
EUT: Model 248DX

Radio Equipment Testing

Standards

Specification	Method
FCC 15.247:2019	ANSI C63.10:2013, KDB 558074

Results

Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions	No	N/A	Not required for a battery powered EUT.
6.5, 6.6, 11.12.1, 11.13.2,	Spurious Radiated Emissions	Yes	Pass	
11.6	Duty Cycle	Yes	N/A	
11.8.2	Occupied Bandwidth	Yes	Pass	
11.9.1.1	Output Power	Yes	Pass	
11.9.1.1	Equivalent Isotropic Radiated Power	Yes	Pass	
11.10.2	Power Spectral Density	Yes	Pass	
11.11	Band Edge Compliance	Yes	Pass	
11.11	Spurious Conducted Emissions	Yes	Pass	

Deviations From Test Standards

None

Approved By:



Eric Brandon, Department Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information. As indicated in the Statement of Work sent with the quotation, Element's standard process is to always use the latest published version of the test methods even when earlier versions are cited in the test specification. Issuance of a purchase order was de facto acceptance of this approach. Otherwise, the client would have advised Element in writing of the specific version of the test methods they wanted applied to the subject testing.

REVISION HISTORY



Revision Number	Description	Date (yyyy-mm-dd)	Page Number
00	None		

ACCREDITATIONS AND AUTHORIZATIONS



United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB) and as a CAB for the acceptance of test data.

European Union

European Commission – Within Element, we have a EU Notified Body validated for the EMCD and RED Directives.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIT / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE




For details on the Scopes of our Accreditations, please visit:

<https://www.nwemc.com/emc-testing-accreditations>

FACILITIES



California Labs OC01-17 41 Tesla Irvine, CA 92618 (949) 861-8918	Minnesota Labs MN01-10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	Oregon Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066	Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600
NVLAP				
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code:201049-0	NVLAP Lab Code: 200629-0
Innovation, Science and Economic Development Canada				
2834B-1, 2834B-3	2834E-1, 2834E-3	2834D-1	2834G-1	2834F-1
BSMI				
SL2-IN-E-1154R	SL2-IN-E-1152R	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI				
A-0029	A-0109	A-0108	A-0201	A-0110
Recognized Phase I CAB for ISED, ACMA, BSMI, IDA, KCC/RRR, MIC, MOC, NCC, OFCA				
US0158	US0175	US0017	US0191	US0157

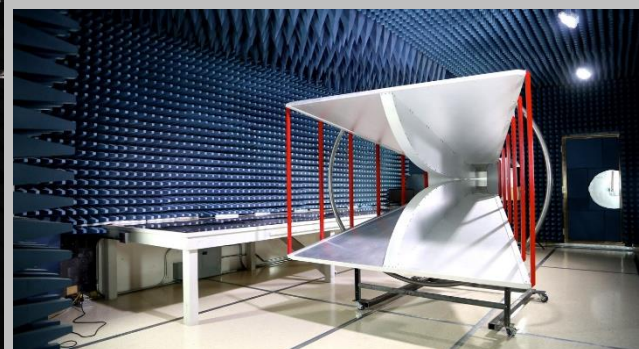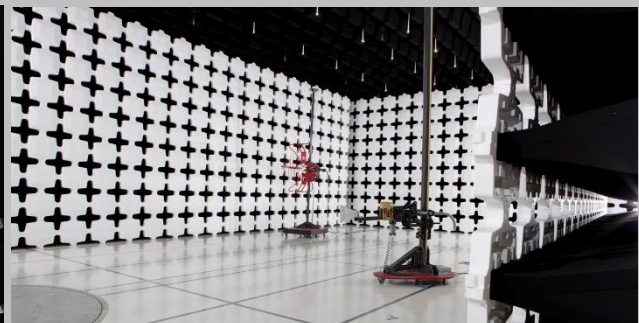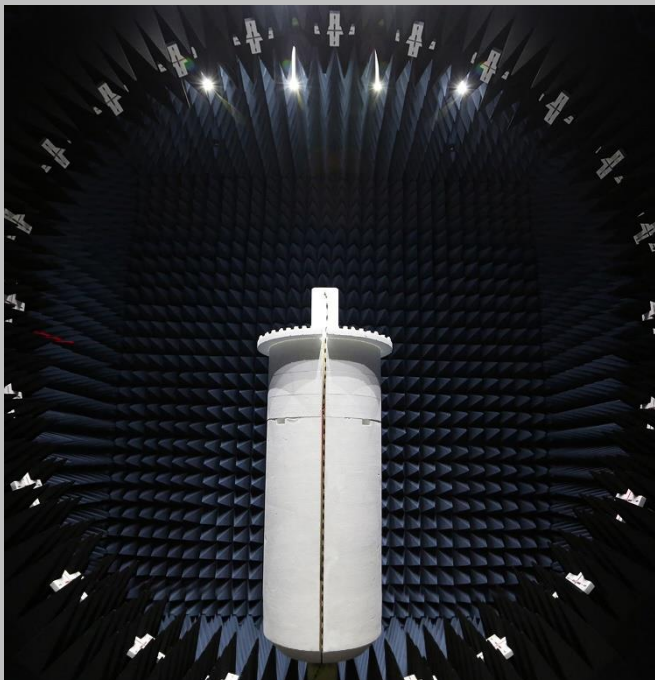

MEASUREMENT UNCERTAINTY

Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

Test	+ MU	- MU
Frequency Accuracy	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	1.2 dB	-1.2 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB

Test Setup Block Diagrams


Antenna Port Conducted Measurements



Near Field Test Fixture Measurements



Spurious Radiated Emissions

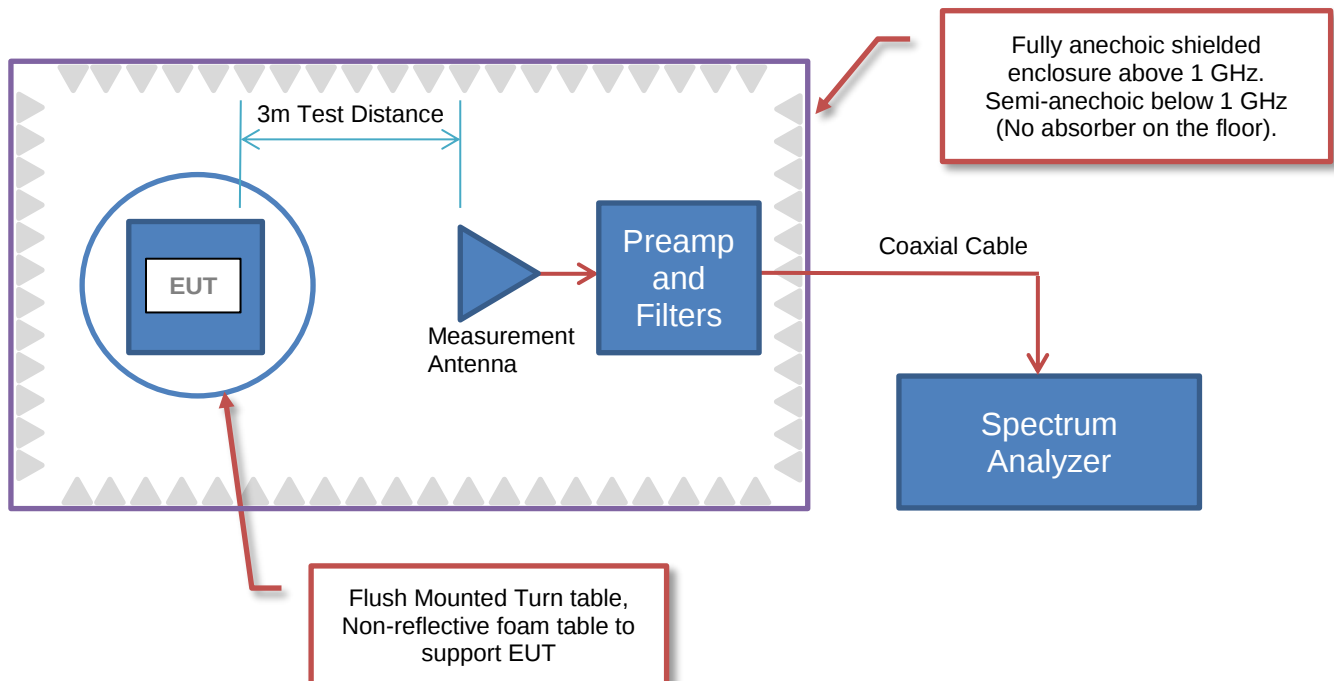

PRODUCT DESCRIPTION



Client and Equipment Under Test (EUT) Information

Company Name:	Emerson Automation Solutions/Rosemount Inc.
Address:	6021 Innovation Boulevard
City, State, Zip:	Shakopee, MN 55379
Test Requested By:	Elizabeth Reiersen
EUT:	Model 248DX
First Date of Test:	October 14, 2019
Last Date of Test:	October 17, 2019
Receipt Date of Samples:	October 14, 2019
Equipment Design Stage:	Production
Equipment Condition:	No Damage
Purchase Authorization:	Verified

Information Provided by the Party Requesting the Test

Functional Description of the EUT:
Wireless Temperature Transmitter
Testing Objective:
To demonstrate compliance of the 2.4 GHz DTS radio to FCC 15.247 requirements.

CONFIGURATIONS

Configuration EMPM0071- 1

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Wireless Temperature Transmitter	Rosemount Inc.	248DX	0007065

Configuration EMPM0071- 3

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Wireless Temperature Transmitter	Rosemount Inc.	248DX	0009561

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Laptop	Lenovo	ThinkPad T510	431436U
USB HART Interface	MACTek Corporation	Viator	346802
AC Adapter (Laptop)	Lenovo	92P1160	11S92P1160Z1ZBGH87P524

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
USB Cable (HART Interface)	No	0.3m	No	Laptop	USB HART Interface
HART Interface Cable	No	2.0m	No	USB HART Interface	Wireless Temperature Transmitter
AC Cable (Laptop)	No	1.0m	No	AC Mains	AC Adapter (Laptop)
DC Cable (Laptop)	No	1.8m	Yes	AC Adapter (Laptop)	Laptop

MODIFICATIONS

Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	2019-10-14	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
2	2019-10-17	Duty Cycle	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
3	2019-10-17	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
4	2019-10-17	Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
5	2019-10-17	Equivalent Isotropic Radiated Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
6	2019-10-17	Power Spectral Density	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
7	2019-10-17	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
8	2019-10-17	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2019.05.10

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Transmitting WirelessHART (802.15.4) - low channel (2405 MHz), mid channel (2440 MHz), and high channel (2475 MHz) modulated

POWER SETTINGS INVESTIGATED

Battery

CONFIGURATIONS INVESTIGATED

EMPM0071 - 1

FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	26500 MHz
-----------------	--------	----------------	-----------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator	Coaxicom	3910-20	AXY	17-Sep-2019	12 mo
Filter - Low Pass	Micro-Tronics	LPM50004	HGG	17-Sep-2019	12 mo
Filter - High Pass	Micro-Tronics	HPM50111	HFM	18-Sep-2019	12 mo
Amplifier - Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	11-Sep-2019	12 mo
Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNP	11-Sep-2019	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-09	AHG	NCR	0 mo
Amplifier - Pre-Amplifier	L-3 Narda-MITEQ	AMF-6F-12001800-30-10P	PAP	23-Feb-2019	12 mo
Cable	Element	Biconilog Cable	MNX	23-Feb-2019	12 mo
Cable	Element	Standard Gain Cable	MNW	23-Feb-2019	12 mo
Cable	Element	Double Ridge Guide Horn Cables	MNV	23-Feb-2019	12 mo
Antenna - Biconilog	Ametek	CBL 6141B	AYS	19-Mar-2019	24 mo
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	AVX	23-Feb-2019	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	AVC	23-Feb-2019	12 mo
Amplifier - Pre-Amplifier	Miteq	AM-1064-9079 and SA18E-10	AOO	23-Feb-2019	12 mo
Antenna - Standard Gain	ETS-Lindgren	3160-08	AJP	NCR	0 mo
Antenna - Standard Gain	ETS-Lindgren	3160-07	AJJ	NCR	0 mo
Antenna - Double Ridge	ETS Lindgren	3115	AIB	27-Aug-2018	24 mo
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFD	28-Jul-2019	12 mo

MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

TEST DESCRIPTION

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequencies and the modes as showed in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These "pre-scans" are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis if required, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector

PK = Peak Detector

AV = RMS Detector

Measurements were made to satisfy the specific requirements of the test specification for out of band emissions as well as the restricted band requirements.

If there are no detectable emissions above the noise floor, the data included may show noise floor measurements for reference only.

Measurements at the edges of the allowable band may be presented in an alternative method as provided for in the ANSI C63.10 Marker-Delta method. This method involves performing an in-band fundamental measurement followed by a screen capture of the fundamental and out-of-band emission using reduced measurement instrumentation bandwidths. The amplitude delta measured on this screen capture is applied to the fundamental emission value to show the out-of-band emission level as applied to the limit.

SPURIOUS RADIATED EMISSIONS




EmiR5 2019.08.15.1 PSA-ESCI 2019.05.10

Work Order:	EMPM0071	Date:	14-Oct-2019	<i>Dustin Sparks</i>
Project:	None	Temperature:	21.5 °C	
Job Site:	MN09	Humidity:	36% RH	
Serial Number:	0007065	Barometric Pres.:	1019 mbar	
EUT:	Model 248DX	Tested by:	Dustin Sparks	
Configuration:	1			
Customer:	Emerson Automation Solutions/Rosemount Inc.			
Attendees:	Merritt Pulkrabek			
EUT Power:	Battery			
Operating Mode:	Transmitting WirelessHART (802.15.4) - low channel (2405 MHz), mid channel (2440 MHz), and high channel (2475 MHz) modulated			
Deviations:	None			
Comments:	EUT operating at a measured 77.6% duty cycle. Duty cycle correction factor (DCCF) of 1.1 dB was added to the average points, based on the formula $DCCF = 10 * \log(1/DC)$.			

Test Specifications	Test Method
FCC 15.247:2019	ANSI C63.10:2013

Run #	21	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass
-------	----	-------------------	---	-------------------	-----------	---------	------

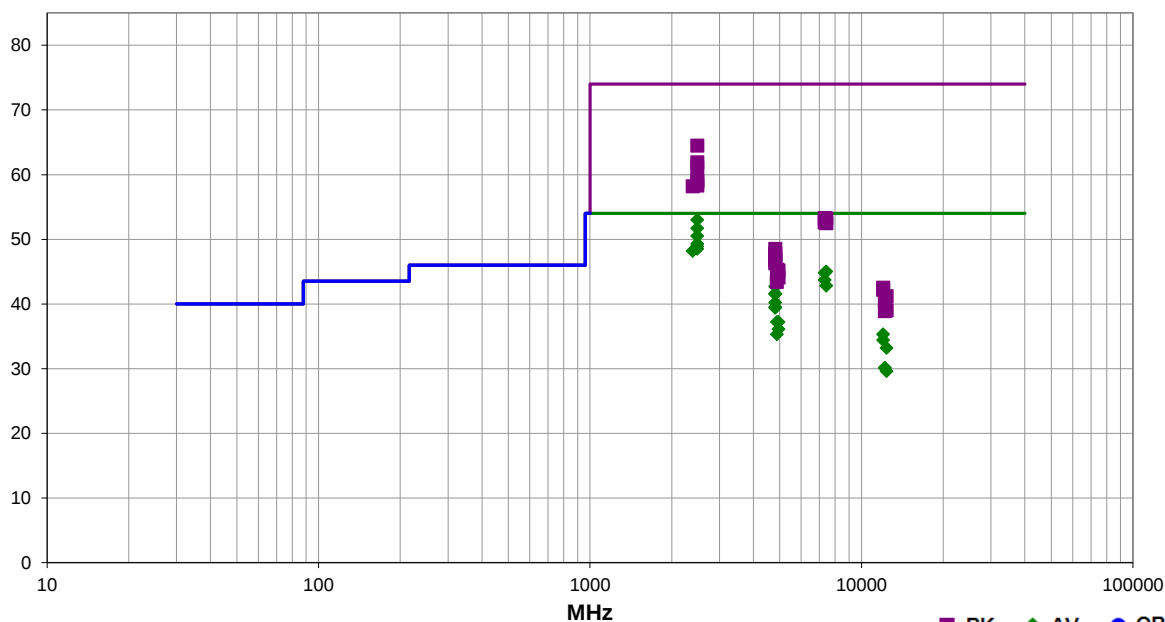

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
2483.542	36.0	-4.1	1.0	296.0	1.1	20.0	Vert	AV	0.0	53.0	54.0	-1.0	High ch, EUT on side
2483.508	34.7	-4.1	1.0	188.0	1.1	20.0	Horz	AV	0.0	51.7	54.0	-2.3	High ch, EUT horizontal
2483.500	33.5	-4.1	1.5	29.0	1.1	20.0	Horz	AV	0.0	50.5	54.0	-3.5	High ch, EUT vertical
2483.525	32.3	-4.1	1.5	159.0	1.1	20.0	Horz	AV	0.0	49.3	54.0	-4.7	High ch, EUT on side
2483.617	31.9	-4.1	1.5	322.0	1.1	20.0	Vert	AV	0.0	48.9	54.0	-5.1	High ch, EUT vertical
2483.525	31.5	-4.1	1.5	300.0	1.1	20.0	Vert	AV	0.0	48.5	54.0	-5.5	High ch, EUT horizontal
2387.567	31.3	-4.2	1.5	278.0	1.1	20.0	Vert	AV	0.0	48.2	54.0	-5.8	Low ch, EUT on side
7426.383	31.1	12.8	3.6	16.0	1.1	0.0	Vert	AV	0.0	45.0	54.0	-9.0	High ch, EUT on side
7321.517	31.0	12.7	3.9	219.0	1.1	0.0	Horz	AV	0.0	44.8	54.0	-9.2	Mid ch, EUT vertical
2483.900	48.6	-4.1	1.0	296.0	0.0	20.0	Vert	PK	0.0	64.5	74.0	-9.5	High ch, EUT on side
7321.350	29.9	12.7	1.5	32.0	1.1	0.0	Vert	AV	0.0	43.7	54.0	-10.3	Mid ch, EUT on side
7426.542	28.9	12.8	1.5	213.0	1.1	0.0	Horz	AV	0.0	42.8	54.0	-11.2	High ch, EUT vertical
4809.000	38.2	3.4	2.2	2.0	1.1	0.0	Horz	AV	0.0	42.7	54.0	-11.3	Low ch, EUT vertical
2483.675	46.0	-4.1	1.5	29.0	0.0	20.0	Horz	PK	0.0	61.9	74.0	-12.1	High ch, EUT vertical
4810.925	37.1	3.4	1.0	296.0	1.1	0.0	Vert	AV	0.0	41.6	54.0	-12.4	Low ch, EUT on side
4808.992	37.0	3.4	1.5	225.0	1.1	0.0	Horz	AV	0.0	41.5	54.0	-12.5	Low ch, EUT horizontal
2483.592	45.2	-4.1	1.0	188.0	0.0	20.0	Horz	PK	0.0	61.1	74.0	-12.9	High ch, EUT horizontal
4809.017	35.7	3.4	2.3	356.0	1.1	0.0	Vert	AV	0.0	40.2	54.0	-13.8	Low ch, EUT vertical

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
4808.992	35.0	3.4	3.6	76.0	1.1	0.0	Horz	AV	0.0	39.5	54.0	-14.5	Low ch, EUT on side
4809.050	34.9	3.4	2.8	151.0	1.1	0.0	Vert	AV	0.0	39.4	54.0	-14.6	Low ch, EUT horizontal
2484.033	43.2	-4.1	1.5	159.0	0.0	20.0	Horz	PK	0.0	59.1	74.0	-14.9	High ch, EUT on side
2484.083	43.0	-4.1	1.5	322.0	0.0	20.0	Vert	PK	0.0	58.9	74.0	-15.1	High ch, EUT vertical
2485.175	42.4	-4.1	1.5	300.0	0.0	20.0	Vert	PK	0.0	58.3	74.0	-15.7	High ch, EUT horizontal
2387.983	42.4	-4.2	1.5	278.0	0.0	20.0	Vert	PK	0.0	58.2	74.0	-15.8	Low ch, EUT on side
4880.992	32.6	3.5	2.5	194.0	1.1	0.0	Horz	AV	0.0	37.2	54.0	-16.8	Mid ch, EUT vertical
4950.917	32.5	3.6	2.3	149.0	1.1	0.0	Horz	AV	0.0	37.2	54.0	-16.8	High ch, EUT vertical
4950.850	31.4	3.6	3.5	126.0	1.1	0.0	Vert	AV	0.0	36.1	54.0	-17.9	High ch, EUT on side
4880.917	30.7	3.5	1.3	90.0	1.1	0.0	Vert	AV	0.0	35.3	54.0	-18.7	Mid ch, EUT on side
12027.480	35.4	-1.2	2.0	240.0	1.1	0.0	Horz	AV	0.0	35.3	54.0	-18.7	Low ch, EUT vertical
12027.330	34.5	-1.2	1.0	47.0	1.1	0.0	Vert	AV	0.0	34.4	54.0	-19.6	Low ch, EUT on side
7321.850	40.6	12.7	3.9	219.0	0.0	0.0	Horz	PK	0.0	53.3	74.0	-20.7	Mid ch, EUT vertical
7426.458	40.4	12.8	3.6	16.0	0.0	0.0	Vert	PK	0.0	53.2	74.0	-20.8	High ch, EUT on side
12377.470	32.6	-0.5	1.5	240.0	1.1	0.0	Horz	AV	0.0	33.2	54.0	-20.8	High ch, EUT vertical
7318.408	39.9	12.7	1.5	32.0	0.0	0.0	Vert	PK	0.0	52.6	74.0	-21.4	Mid ch, EUT on side
7423.192	39.7	12.8	1.5	213.0	0.0	0.0	Horz	PK	0.0	52.5	74.0	-21.5	High ch, EUT vertical
12202.340	29.4	-0.4	1.5	47.0	1.1	0.0	Horz	AV	0.0	30.1	54.0	-23.9	Mid ch, EUT vertical
12199.050	29.4	-0.4	2.7	158.0	1.1	0.0	Vert	AV	0.0	30.1	54.0	-23.9	Mid ch, EUT on side
12377.440	29.0	-0.5	1.5	295.0	1.1	0.0	Vert	AV	0.0	29.6	54.0	-24.4	High ch, EUT on side
4808.767	45.1	3.4	2.2	2.0	0.0	0.0	Horz	PK	0.0	48.5	74.0	-25.5	Low ch, EUT vertical
4808.867	44.4	3.4	1.5	225.0	0.0	0.0	Horz	PK	0.0	47.8	74.0	-26.2	Low ch, EUT horizontal
4808.717	44.3	3.4	1.0	296.0	0.0	0.0	Vert	PK	0.0	47.7	74.0	-26.3	Low ch, EUT on side
4808.717	43.5	3.4	3.6	76.0	0.0	0.0	Horz	PK	0.0	46.9	74.0	-27.1	Low ch, EUT on side
4808.967	43.2	3.4	2.3	356.0	0.0	0.0	Vert	PK	0.0	46.6	74.0	-27.4	Low ch, EUT vertical
4808.783	42.9	3.4	2.8	151.0	0.0	0.0	Vert	PK	0.0	46.3	74.0	-27.7	Low ch, EUT horizontal
4881.192	41.8	3.5	2.5	194.0	0.0	0.0	Horz	PK	0.0	45.3	74.0	-28.7	Mid ch, EUT vertical
4950.867	41.6	3.6	2.3	149.0	0.0	0.0	Horz	PK	0.0	45.2	74.0	-28.8	High ch, EUT vertical
4950.800	40.5	3.6	3.5	126.0	0.0	0.0	Vert	PK	0.0	44.1	74.0	-29.9	High ch, EUT on side
4878.508	39.8	3.6	1.3	90.0	0.0	0.0	Vert	PK	0.0	43.4	74.0	-30.6	Mid ch, EUT on side
12022.870	43.7	-1.2	2.0	240.0	0.0	0.0	Horz	PK	0.0	42.5	74.0	-31.5	Low ch, EUT vertical
12022.540	43.4	-1.2	1.0	47.0	0.0	0.0	Vert	PK	0.0	42.2	74.0	-31.8	Low ch, EUT on side
12377.220	41.7	-0.5	1.5	240.0	0.0	0.0	Horz	PK	0.0	41.2	74.0	-32.8	High ch, EUT vertical
12199.420	40.9	-0.4	2.7	158.0	0.0	0.0	Vert	PK	0.0	40.5	74.0	-33.5	Mid ch, EUT on side
12374.670	39.5	-0.5	1.5	295.0	0.0	0.0	Vert	PK	0.0	39.0	74.0	-35.0	High ch, EUT on side
12198.200	39.4	-0.5	1.5	47.0	0.0	0.0	Horz	PK	0.0	38.9	74.0	-35.1	Mid ch, EUT vertical

DUTY CYCLE



XMIT 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	5-Apr-19	5-Apr-20

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The Duty Cycle (x) of the single channel operation of the radio as controlled by the provided test software was measured for each of the EUT operating modes.

There is no compliance requirement to be met by this test, so therefore no Pass / Fail criteria.

The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum.

The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.

If the transmit duty cycle < 98 percent, burst gating may have been used during some of the other tests in this report to only take the measurement during the burst duration.


ThiTx 2019.08.30.0 XMIT 2019.09.05

DUTY CYCLE




TIMTx 2019.08.30.0 XMI 2019.09.05

WirelessHART (802.15.4) Low Channel, 2405 MHz						
	Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results
	4.308 ms	5.553 ms	1	77.6	N/A	N/A

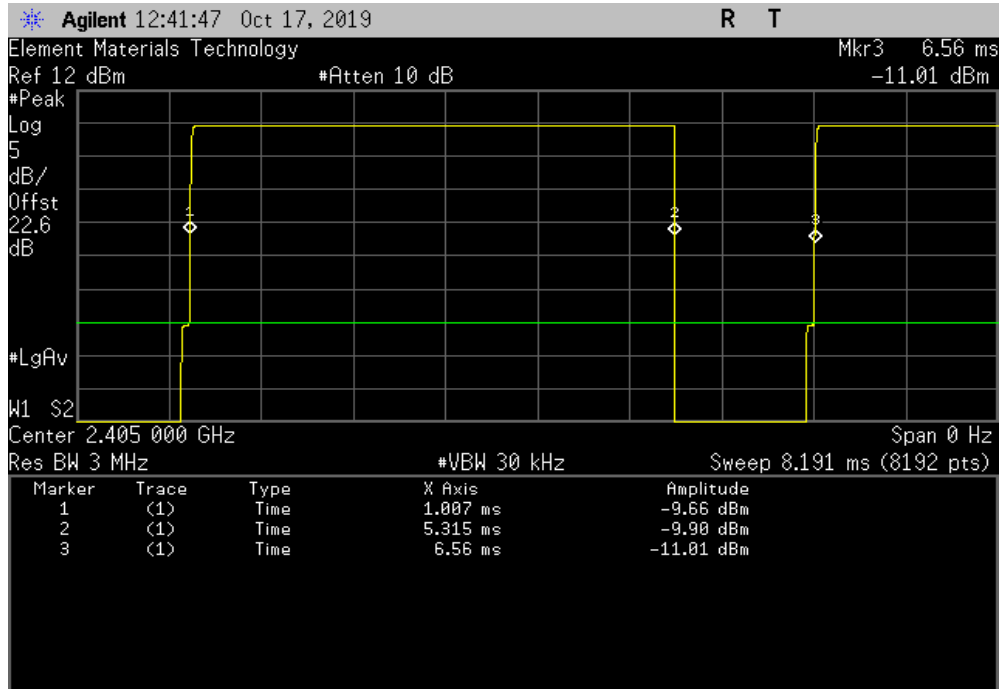

WirelessHART (802.15.4) Low Channel, 2405 MHz						
	Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results
	N/A	N/A	5	N/A	N/A	N/A

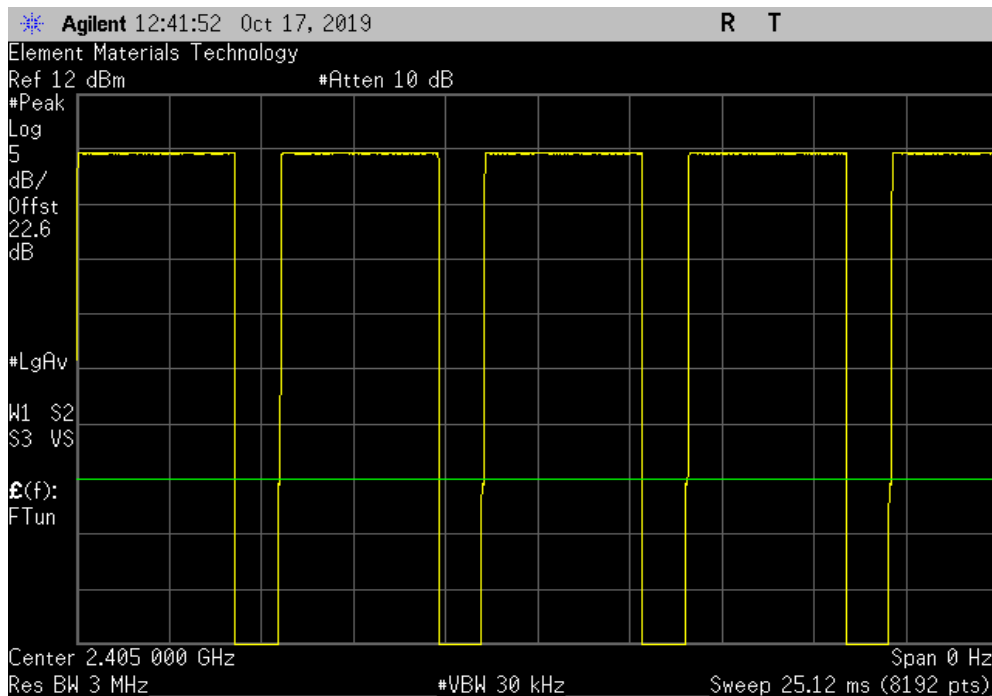


DUTY CYCLE




TIMTx 2019.08.30.0 XMI 2019.09.05

WirelessHART (802.15.4) Mid Channel, 2440 MHz						
	Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results
	4.308 ms	5.554 ms	1	77.6	N/A	N/A

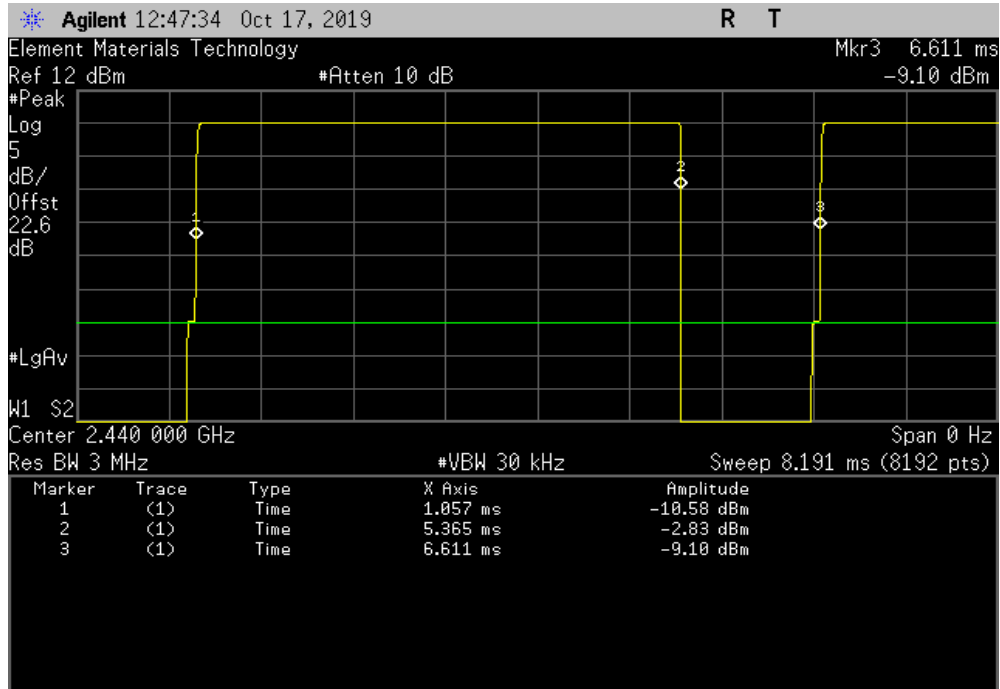

WirelessHART (802.15.4) Mid Channel, 2440 MHz						
	Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results
	N/A	N/A	5	N/A	N/A	N/A

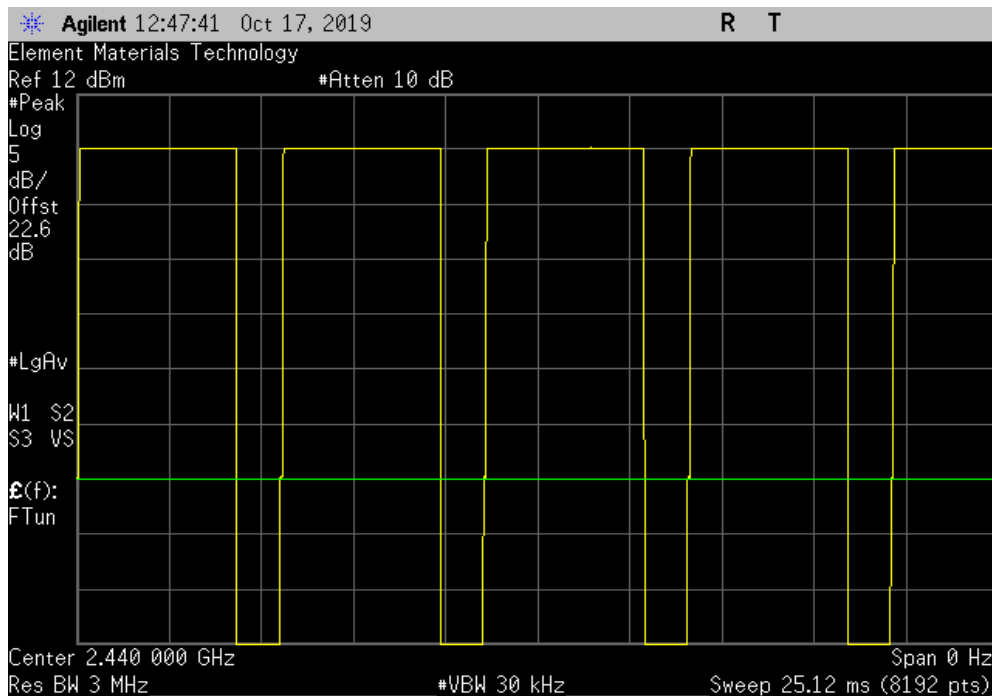


DUTY CYCLE




TUTx 2019.08.30.0 XMI 2019.09.05

WirelessHART (802.15.4) High Channel, 2475 MHz						
	Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results
	4.307 ms	5.554 ms	1	77.5	N/A	N/A

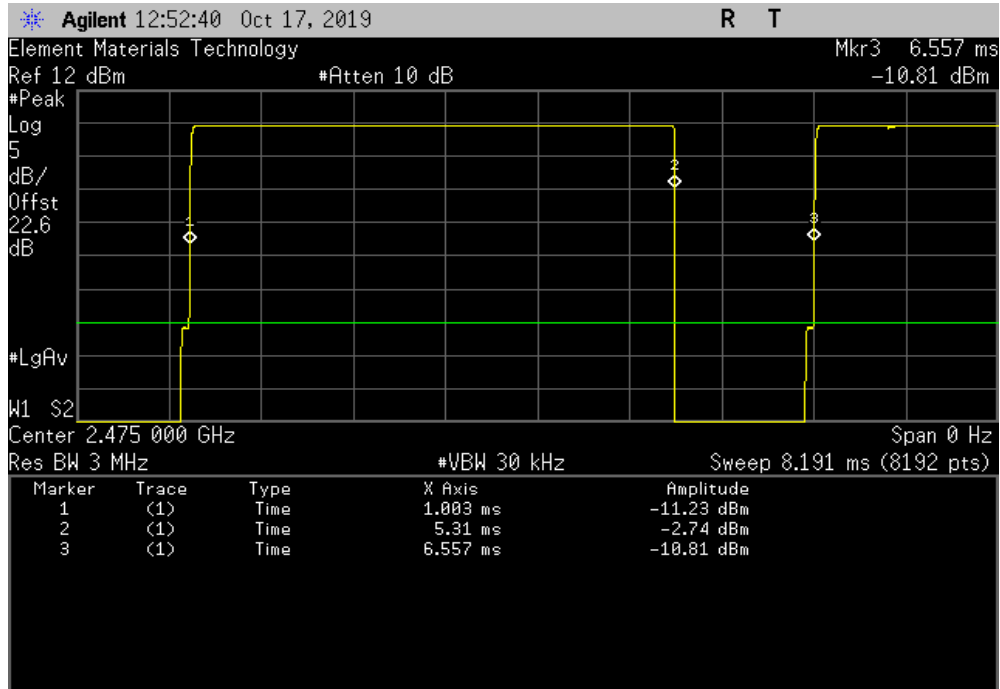

WirelessHART (802.15.4) High Channel, 2475 MHz						
	Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results
	N/A	N/A	5	N/A	N/A	N/A

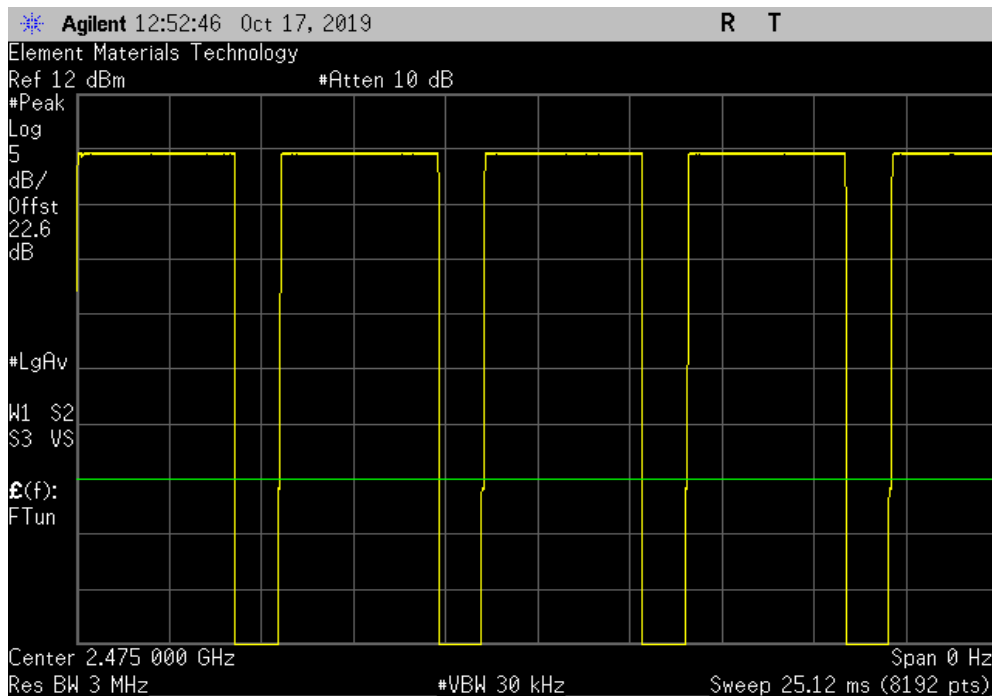

OCCUPIED BANDWIDTH



XMIT 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	5-Apr-19	5-Apr-20

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The EUT was set to the channels and modes listed in the datasheet.

The 6dB occupied bandwidth was measured using 100 kHz resolution bandwidth and 300 kHz video bandwidth. The 99.0% occupied bandwidth was also measured at the same time which can be needed during Output Power depending on the applicable method.

OCCUPIED BANDWIDTH



TMTx 2019.08.30.0 XMI 2019.09.05


EUT: Model 248DX		Work Order: EMPM0071	
Serial Number: 0009561		Date: 17-Oct-19	
Customer: Emerson Automation Solutions/Rosemount Inc.		Temperature: 23.7 °C	
Attendees: Merritt Pulkrabek		Humidity: 36.5% RH	
Project: None		Barometric Pres.: 1018 mbar	
Tested by: Dustin Sparks	Power: Battery	Job Site: MN08	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2019		ANSI C63.10:2013	
COMMENTS			
None			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	3	Signature <i>Dustin Sparks</i>	
		Value	Limit (>)
WirelessHART (802.15.4) Low Channel, 2405 MHz		1.553 MHz	500 kHz
WirelessHART (802.15.4) Mid Channel, 2440 MHz		1.549 MHz	500 kHz
WirelessHART (802.15.4) High Channel, 2475 MHz		1.605 MHz	500 kHz
			Result
			Pass
			Pass
			Pass

OCCUPIED BANDWIDTH




TWTx 2019.08.30.0 XMI 2019.09.05

WirelessHART (802.15.4) Low Channel, 2405 MHz						
				Value	Limit (>)	Result
				1.553 MHz	500 kHz	Pass

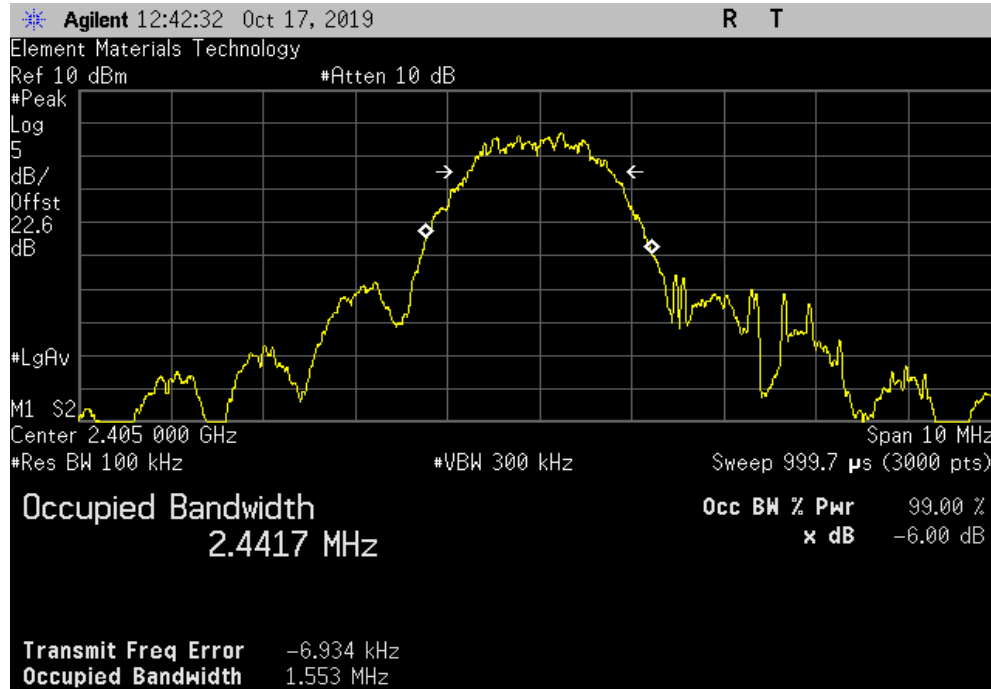

WirelessHART (802.15.4) Mid Channel, 2440 MHz						
				Value	Limit (>)	Result
				1.549 MHz	500 kHz	Pass

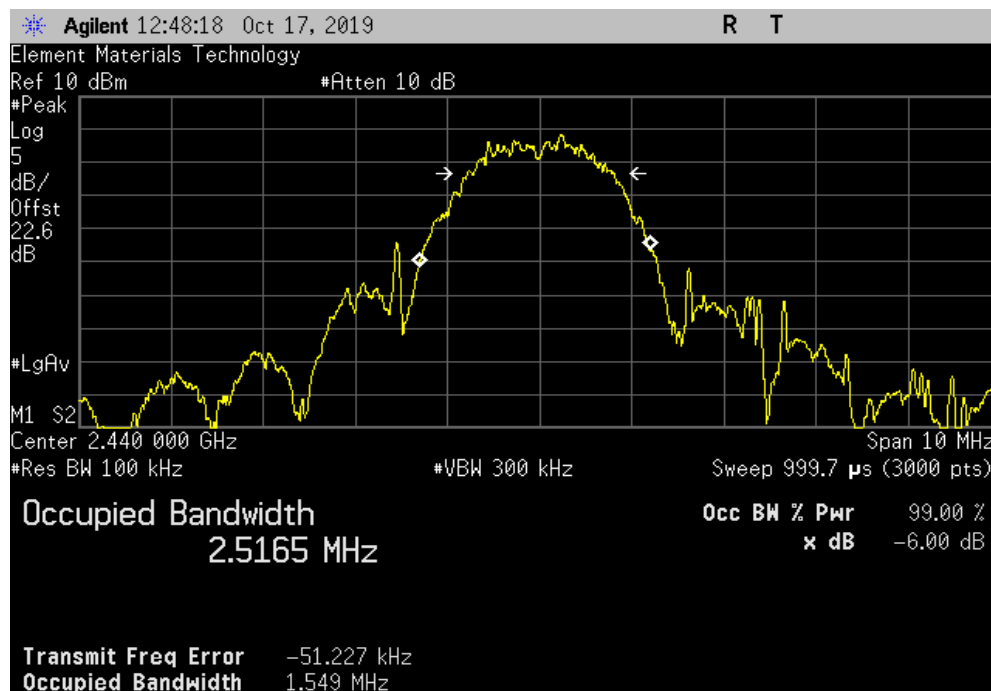


OCCUPIED BANDWIDTH



TbTx 2019.08.30.0 XMI 2019.09.05

WirelessHART (802.15.4) High Channel, 2475 MHz						
				Value	Limit (>)	Result
				1.605 MHz	500 kHz	Pass

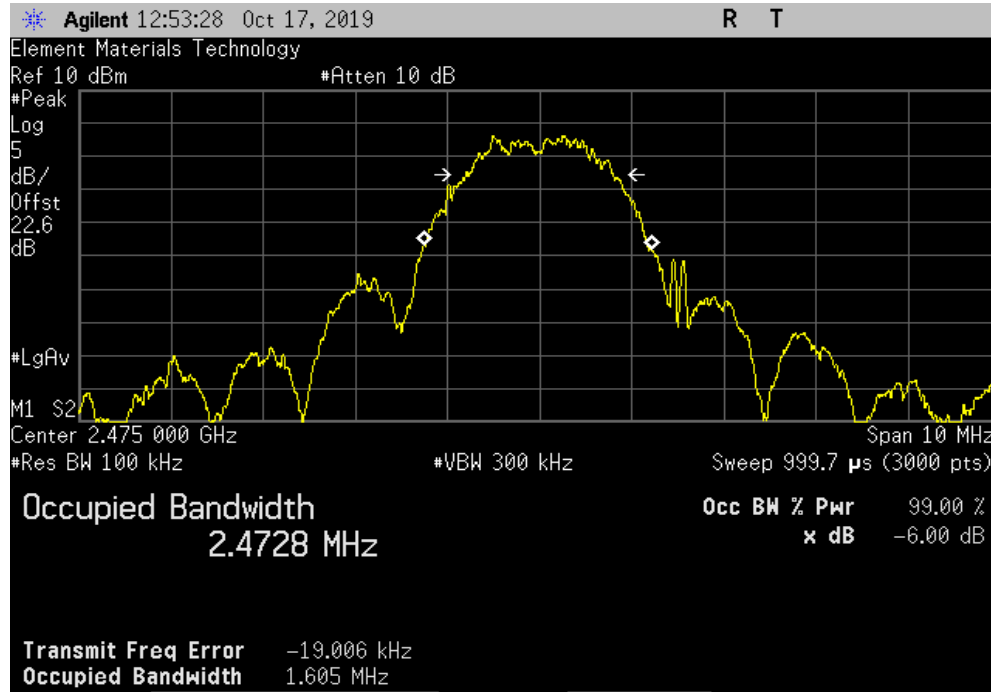

OUTPUT POWER



XMIT 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	5-Apr-19	5-Apr-20

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio.

OUTPUT POWER



TMTx 2019.08.30.0 XMI 2019.09.05


EUT: Model 248DX		Work Order: EMPM0071	
Serial Number: 0009561		Date: 17-Oct-19	
Customer: Emerson Automation Solutions/Rosemount Inc.		Temperature: 23.6 °C	
Attendees: Merritt Pulkrabek		Humidity: 36.4% RH	
Project: None		Barometric Pres.: 1018 mbar	
Tested by: Dustin Sparks	Power: Battery	Job Site: MN08	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2019		ANSI C63.10:2013	
COMMENTS			
None			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	3	Signature <i>Dustin Sparks</i>	
		Out Pwr (dBm)	Limit (dBm)
WirelessHART (802.15.4) Low Channel, 2405 MHz		7.226	30
WirelessHART (802.15.4) Mid Channel, 2440 MHz		7.871	30
WirelessHART (802.15.4) High Channel, 2475 MHz		7.471	30
			Result
			Pass
			Pass
			Pass

OUTPUT POWER




TWTx 2019.08.30.0 XMI 2019.09.05

WirelessHART (802.15.4) Low Channel, 2405 MHz						
				Out Pwr (dBm)	Limit (dBm)	Result
				7.226	30	Pass

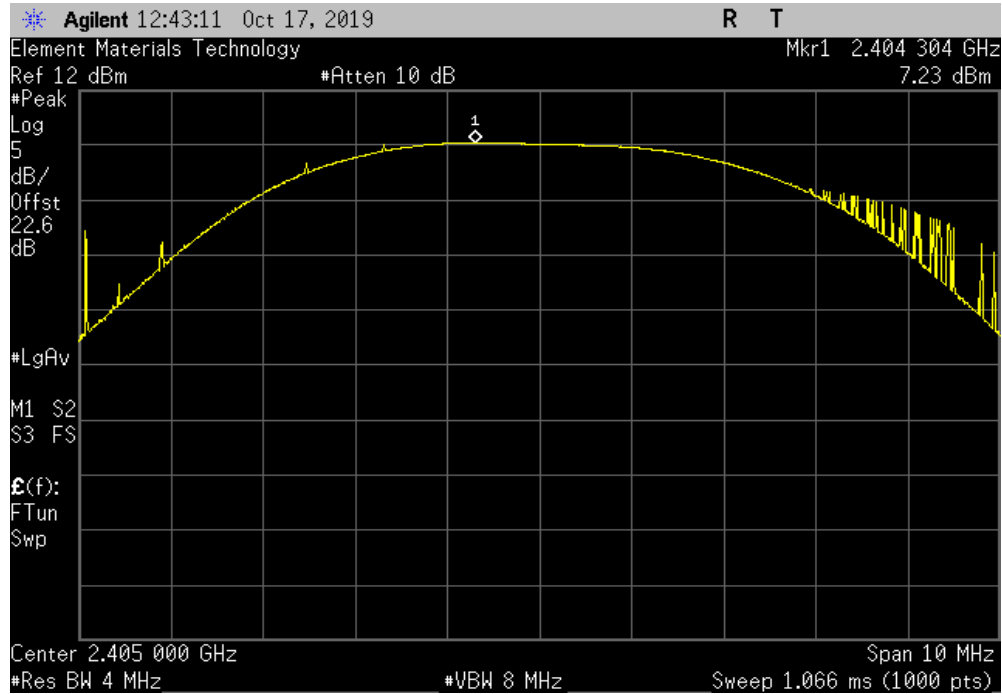

WirelessHART (802.15.4) Mid Channel, 2440 MHz						
				Out Pwr (dBm)	Limit (dBm)	Result
				7.871	30	Pass

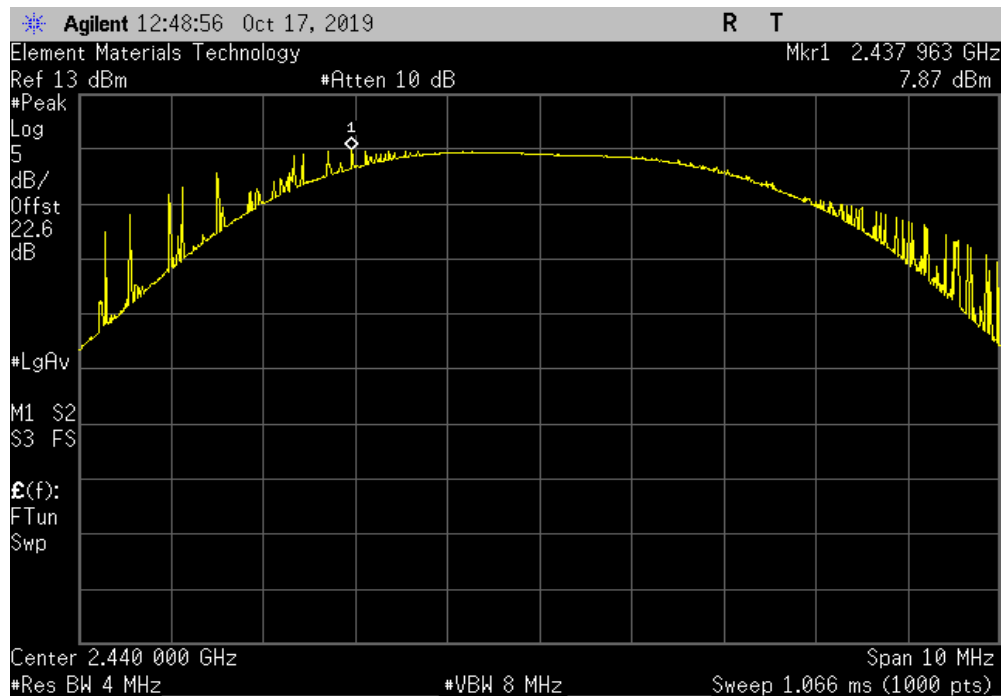


OUTPUT POWER



TbTx 2019.08.30.0 XMI 2019.09.05

WirelessHART (802.15.4) High Channel, 2475 MHz						
				Out Pwr (dBm)	Limit (dBm)	Result
				7.471	30	Pass

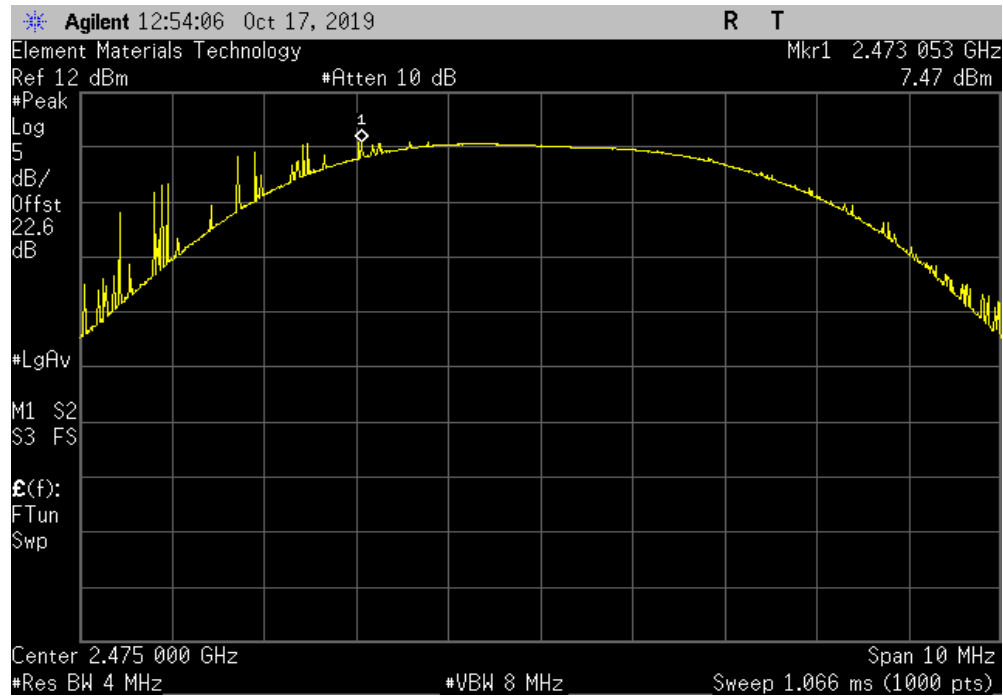

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



XMIT 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	5-Apr-19	5-Apr-20

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio. The antenna gain in dBi was added to the conducted output power in order to obtain the EIRP.

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



TMTx 2019.08.30.0 XMI 2019.09.05


EUT: Model 248DX		Work Order: EMPM0071	
Serial Number: 0009561		Date: 17-Oct-19	
Customer: Emerson Automation Solutions/Rosemount Inc.		Temperature: 23.6 °C	
Attendees: Merritt Pulkrabek		Humidity: 36.6% RH	
Project: None		Barometric Pres.: 1018 mbar	
Tested by: Dustin Sparks	Power: Battery	Job Site: MN08	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2019		ANSI C63.10:2013	
COMMENTS			
None			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	3	Signature <i>Dustin Sparks</i>	
		Out Pwr (dBm)	Antenna Gain (dBi)
WirelessHART (802.15.4) Low Channel, 2405 MHz		7.226	2
WirelessHART (802.15.4) Mid Channel, 2440 MHz		7.871	2
WirelessHART (802.15.4) High Channel, 2475 MHz		7.471	2
		EIRP (dBm)	EIRP Limit (dBm)
		9.226	36
		9.871	36
		9.471	36
			Result
			Pass
			Pass
			Pass

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)




TWTx 2019.08.30.0 XMI 2019.09.05

WirelessHART (802.15.4) Low Channel, 2405 MHz						
	Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result	
	7.226	2	9.226	36	Pass	

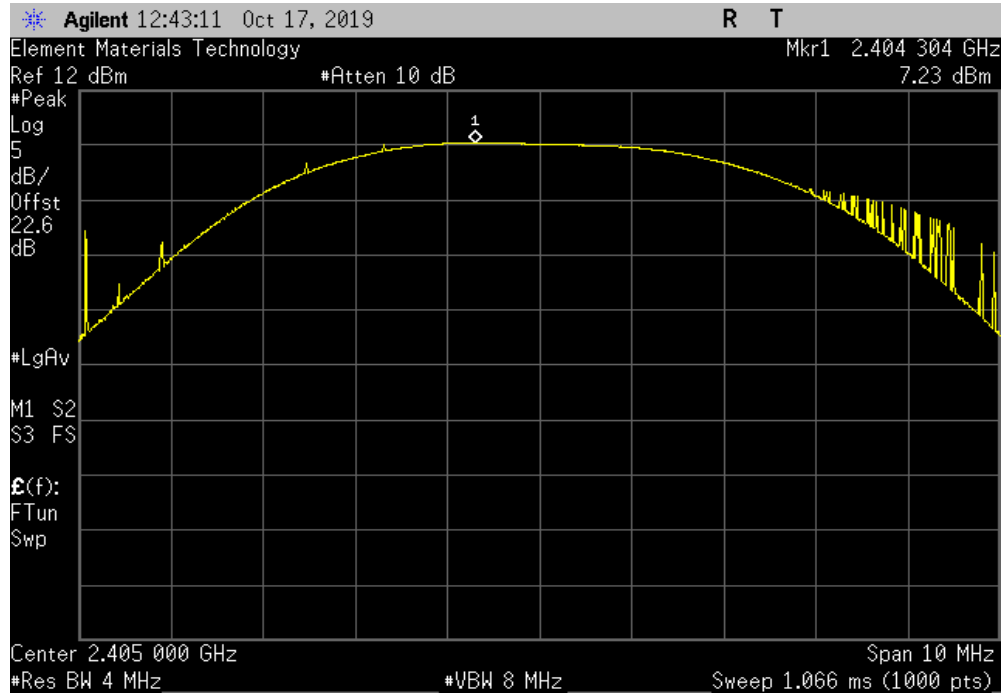

WirelessHART (802.15.4) Mid Channel, 2440 MHz						
	Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result	
	7.871	2	9.871	36	Pass	

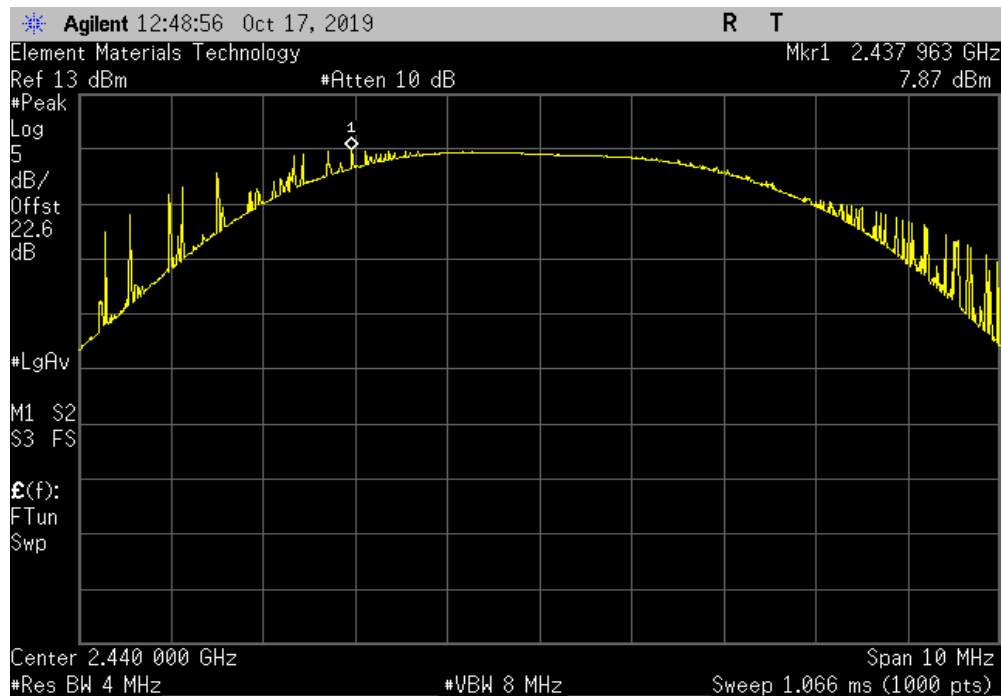


EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



TbTx 2019.08.30.0 XMI 2019.09.05

WirelessHART (802.15.4) High Channel, 2475 MHz						
	Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result	
	7.471	2	9.471	36	Pass	

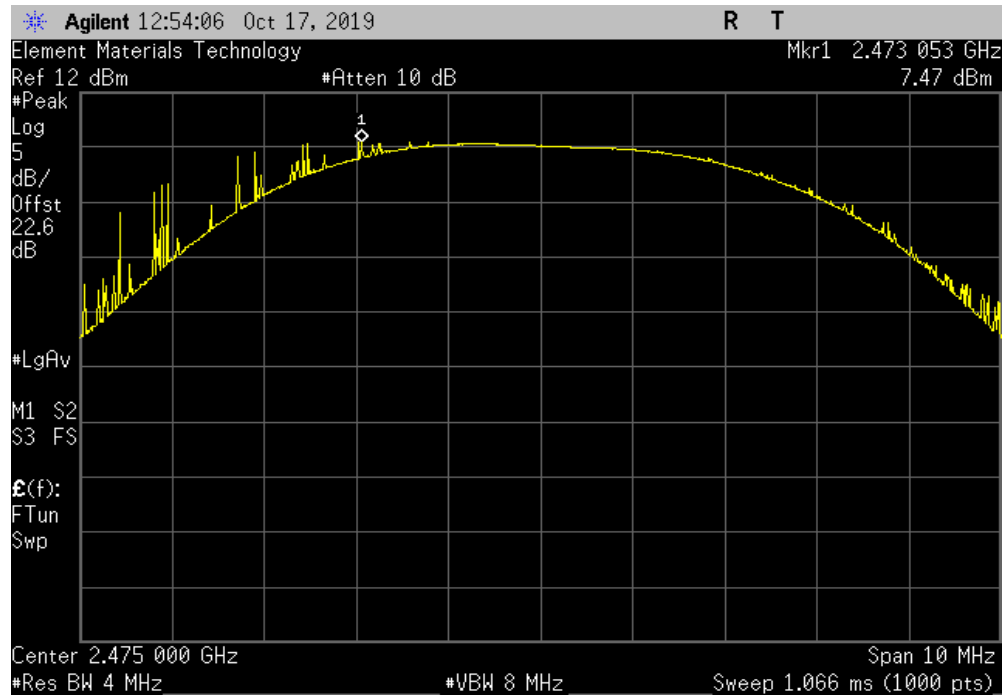

POWER SPECTRAL DENSITY



XMIT 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	5-Apr-19	5-Apr-20

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The maximum power spectral density measurements was measured using the channels and modes as called out on the following data sheets.

Per the procedure outlined in ANSI C63.10 the peak power spectral density was measured in a 3 kHz RBW.

POWER SPECTRAL DENSITY



TMTx 2019.08.30.0 XMI 2019.09.05


EUT: Model 248DX		Work Order: EMPM0071	
Serial Number: 0009561		Date: 17-Oct-19	
Customer: Emerson Automation Solutions/Rosemount Inc.		Temperature: 23.6 °C	
Attendees: Merritt Pulkrabek		Humidity: 36.4% RH	
Project: None		Barometric Pres.: 1018 mbar	
Tested by: Dustin Sparks	Power: Battery	Job Site: MN08	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2019		ANSI C63.10:2013	
COMMENTS			
None			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	3	Signature <i>Dustin Sparks</i>	
		Value dBm/3kHz	Limit < dBm/3kHz
WirelessHART (802.15.4) Low Channel, 2405 MHz		-5.128	8
WirelessHART (802.15.4) Mid Channel, 2440 MHz		-4.96	8
WirelessHART (802.15.4) High Channel, 2475 MHz		-5.157	8
			Results
			Pass
			Pass
			Pass

POWER SPECTRAL DENSITY




TUTx 2019.08.30.0 XMI 2019.09.05

WirelessHART (802.15.4) Low Channel, 2405 MHz						
	Value	Limit				
	dBm/3kHz	< dBm/3kHz	Results			
	-5.128	8	Pass			

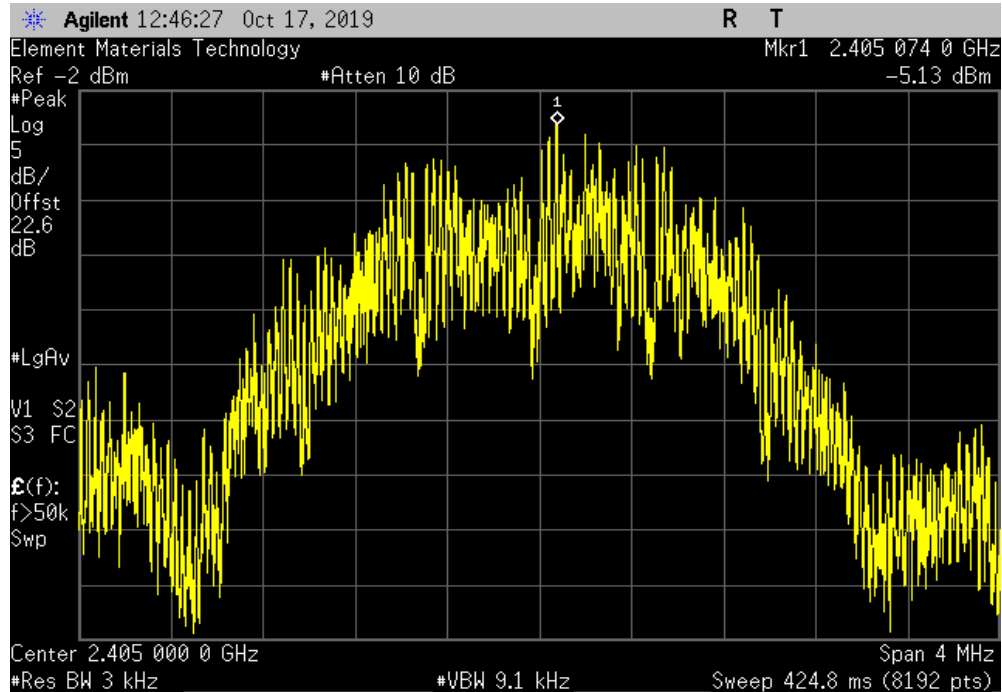

WirelessHART (802.15.4) Mid Channel, 2440 MHz						
	Value	Limit				
	dBm/3kHz	< dBm/3kHz	Results			
	-4.96	8	Pass			

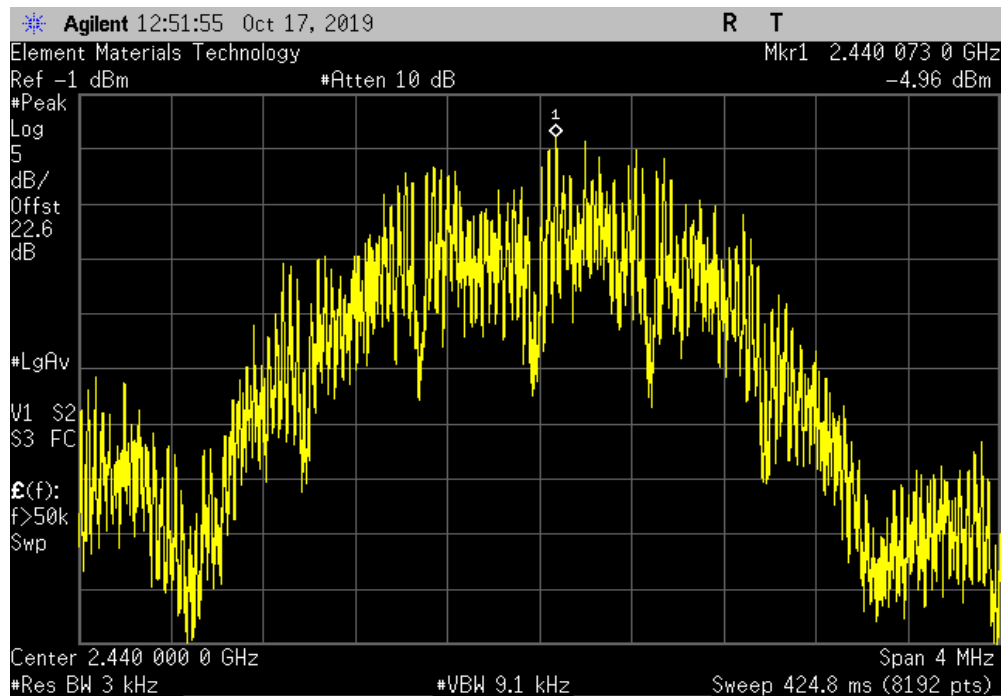


POWER SPECTRAL DENSITY



TbTx 2019.08.30.0 XMI 2019.09.05

WirelessHART (802.15.4) High Channel, 2475 MHz						
	Value	Limit				
	dBm/3kHz	< dBm/3kHz	Results			
	-5.157	8	Pass			

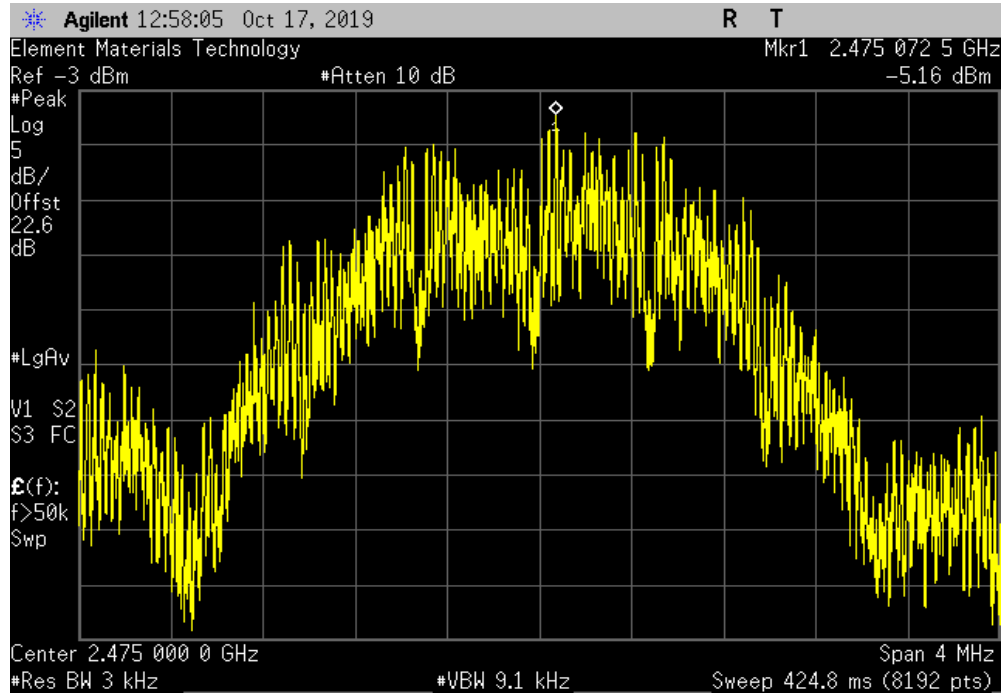

BAND EDGE COMPLIANCE



XMIT 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	5-Apr-19	5-Apr-20

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in each available band. The channels closest to the band edges were selected. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge.

BAND EDGE COMPLIANCE



TMTx 2019.08.30.0 XMI 2019.09.05


EUT: Model 248DX		Work Order: EMPM0071	
Serial Number: 0009561		Date: 17-Oct-19	
Customer: Emerson Automation Solutions/Rosemount Inc.		Temperature: 23.6 °C	
Attendees: Merritt Pulkrabek		Humidity: 36.3% RH	
Project: None		Barometric Pres.: 1018 mbar	
Tested by: Dustin Sparks	Power: Battery	Job Site: MN08	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2019		ANSI C63.10:2013	
COMMENTS			
None			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	3	Signature <i>Dustin Sparks</i>	
		Value (dBc)	Limit ≤ (dBc) Result
WirelessHART (802.15.4) Low Channel, 2405 MHz		-41.72	-20 Pass
WirelessHART (802.15.4) High Channel, 2475 MHz		-49.74	-20 Pass

BAND EDGE COMPLIANCE




TIMTx 2019.08.30.0 XMI 2019.09.05

WirelessHART (802.15.4) Low Channel, 2405 MHz						
				Value (dBc)	Limit ≤ (dBc)	Result
				-41.72	-20	Pass

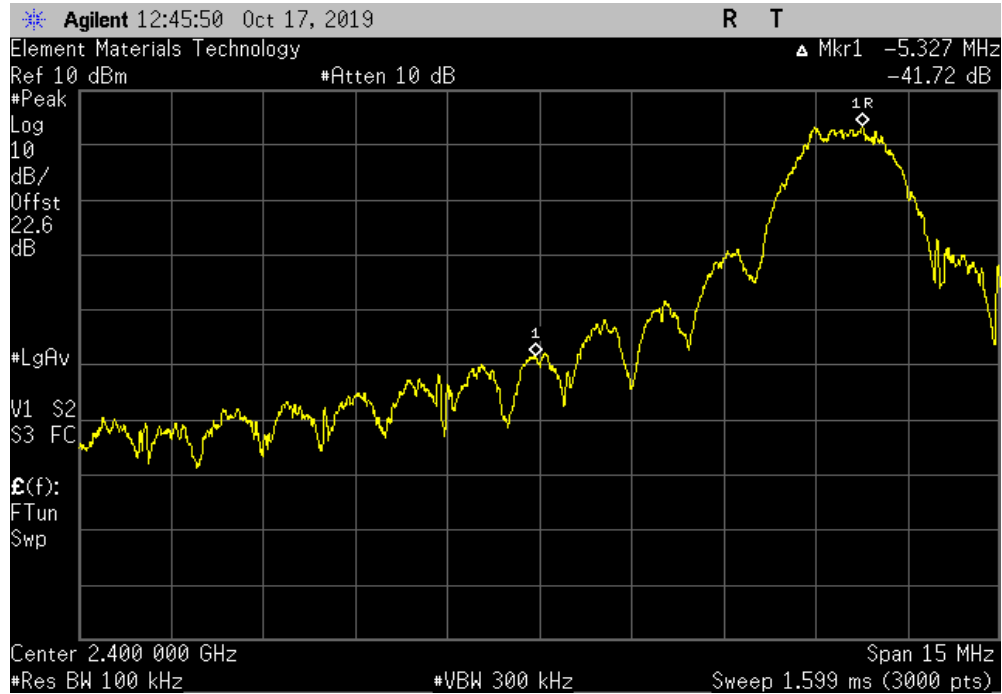

WirelessHART (802.15.4) High Channel, 2475 MHz						
				Value (dBc)	Limit ≤ (dBc)	Result
				-49.74	-20	Pass

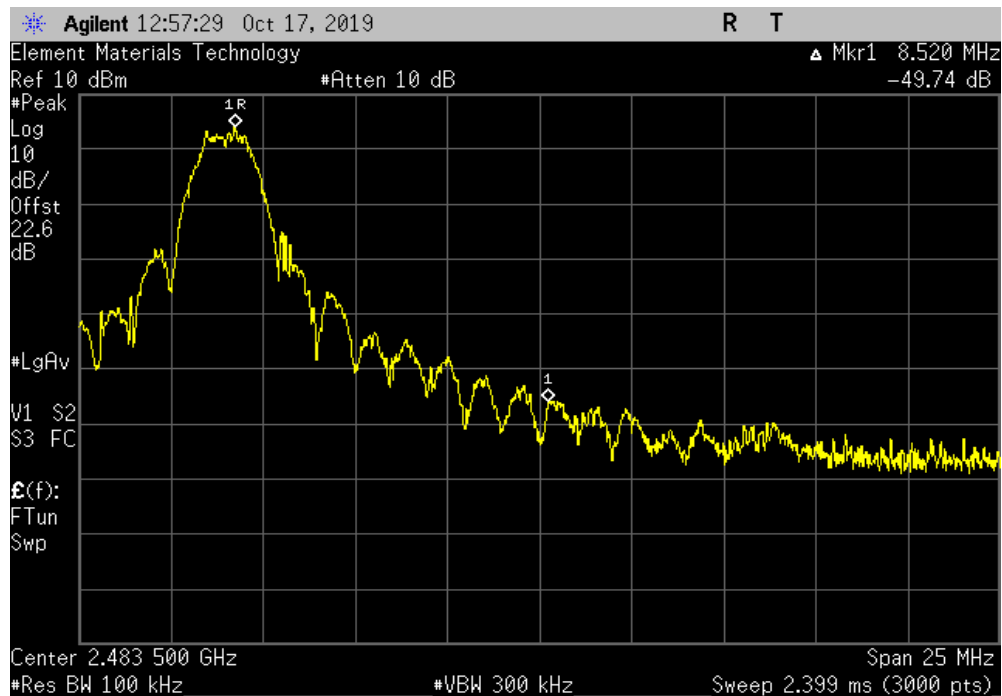

SPURIOUS CONDUCTED EMISSIONS



XMR 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	5-Apr-19	5-Apr-20

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions were measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting at the data rate(s) listed in the datasheet. For each transmit frequency, the spectrum was scanned throughout the specified frequency range.

SPURIOUS CONDUCTED EMISSIONS



TMTx 2019.08.30.0 XMI 2019.09.05


EUT: Model 248DX		Work Order: EMPM0071	
Serial Number: 0009561		Date: 17-Oct-19	
Customer: Emerson Automation Solutions/Rosemount Inc.		Temperature: 23.7 °C	
Attendees: Merritt Pulkrabek		Humidity: 36.3% RH	
Project: None		Barometric Pres.: 1018 mbar	
Tested by: Dustin Sparks		Power: Battery	
		Job Site: MN08	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2019		ANSI C63.10:2013	
COMMENTS			
None			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	3	Signature <i>Dustin Sparks</i>	
		Frequency Range	Measured Freq (MHz)
WirelessHART (802.15.4) Low Channel, 2405 MHz		Fundamental	2405.23
WirelessHART (802.15.4) Low Channel, 2405 MHz		30 MHz - 12.5 GHz	2394.3
WirelessHART (802.15.4) Low Channel, 2405 MHz		12.5 GHz - 25 GHz	24911.5
WirelessHART (802.15.4) Mid Channel, 2440 MHz		Fundamental	2440.23
WirelessHART (802.15.4) Mid Channel, 2440 MHz		30 MHz - 12.5 GHz	2878.4
WirelessHART (802.15.4) Mid Channel, 2440 MHz		12.5 GHz - 25 GHz	22544.6
WirelessHART (802.15.4) High Channel, 2475 MHz		Fundamental	2475.22
WirelessHART (802.15.4) High Channel, 2475 MHz		30 MHz - 12.5 GHz	820.1
WirelessHART (802.15.4) High Channel, 2475 MHz		12.5 GHz - 25 GHz	24897.8
		Max Value (dBc)	Limit ≤ (dBc)
		N/A	N/A
		-53.65	-20
		-52.73	-20
		N/A	N/A
		-55.27	-20
		-52.65	-20
		N/A	N/A
		-55.06	-20
		-52.62	-20
			Result
			N/A
			Pass
			Pass
			N/A
			Pass
			Pass
			N/A
			Pass
			Pass

SPURIOUS CONDUCTED EMISSIONS




TIMTx 2019.08.30.0 XMI 2019.09.05

WirelessHART (802.15.4) Low Channel, 2405 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	2405.23	N/A	N/A	N/A	

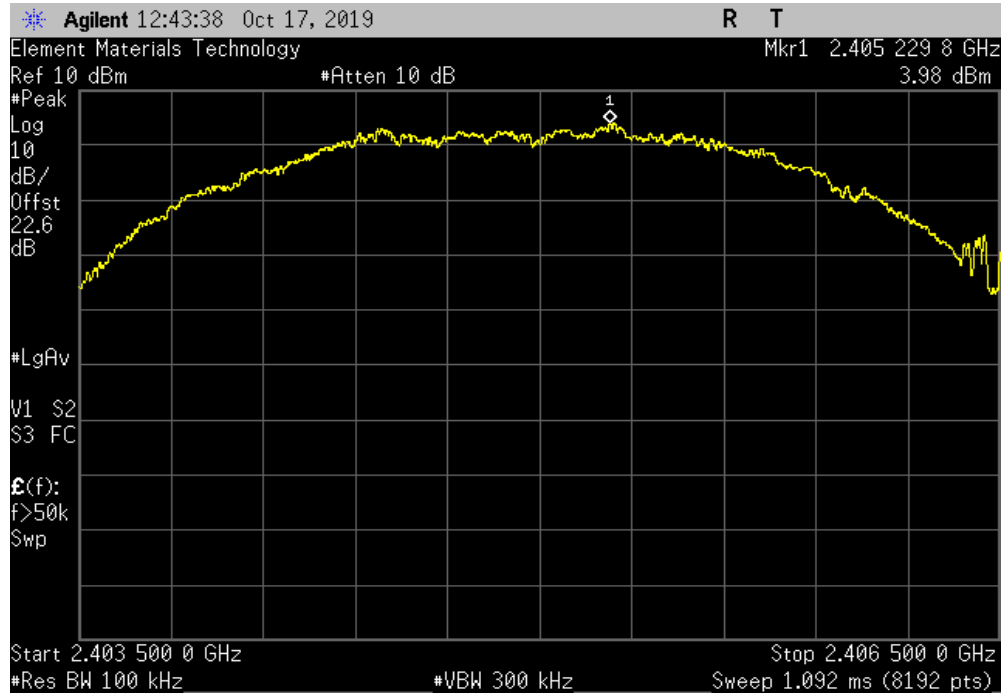

WirelessHART (802.15.4) Low Channel, 2405 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz	2394.3	-53.65	-20	Pass	

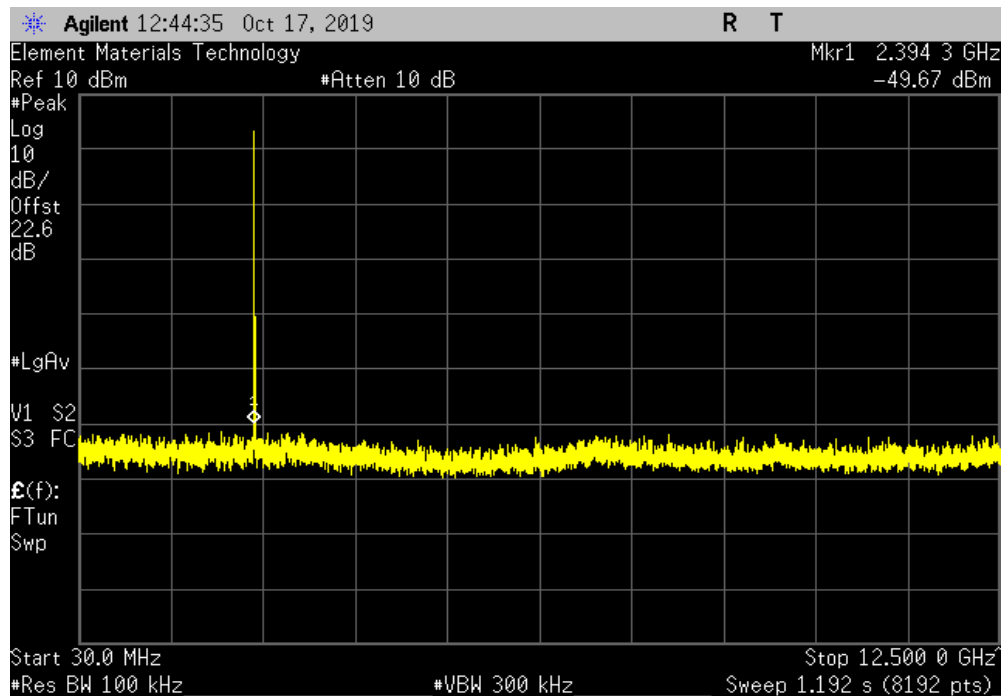


SPURIOUS CONDUCTED EMISSIONS




TWTx 2019.08.30.0 XMI 2019.09.05

WirelessHART (802.15.4) Low Channel, 2405 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	24911.5	-52.73	-20	Pass	

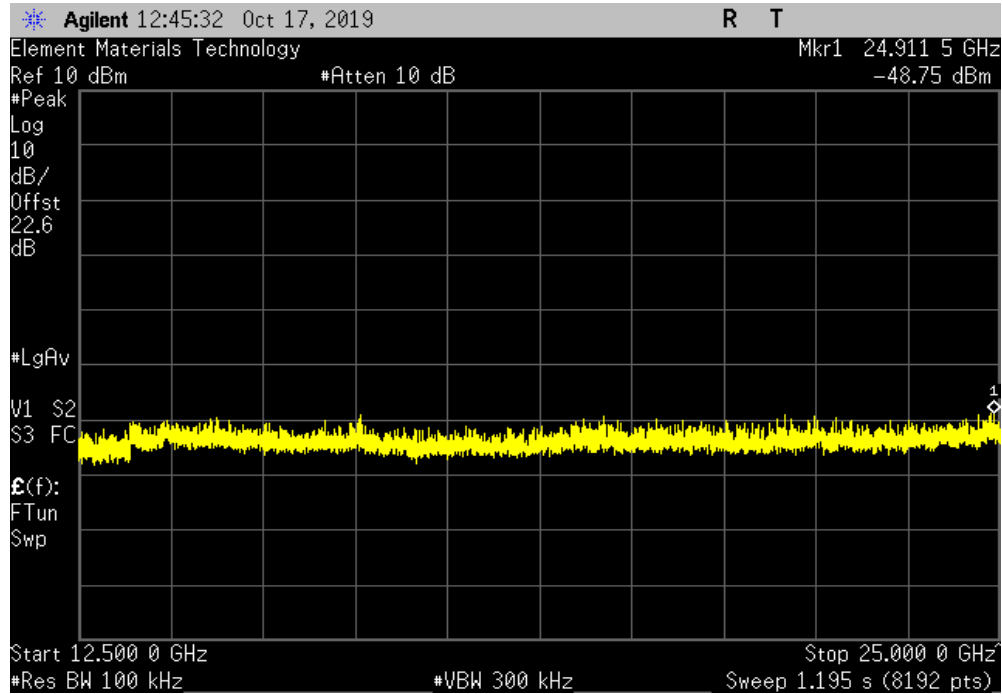

WirelessHART (802.15.4) Mid Channel, 2440 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	2440.23	N/A	N/A	N/A	

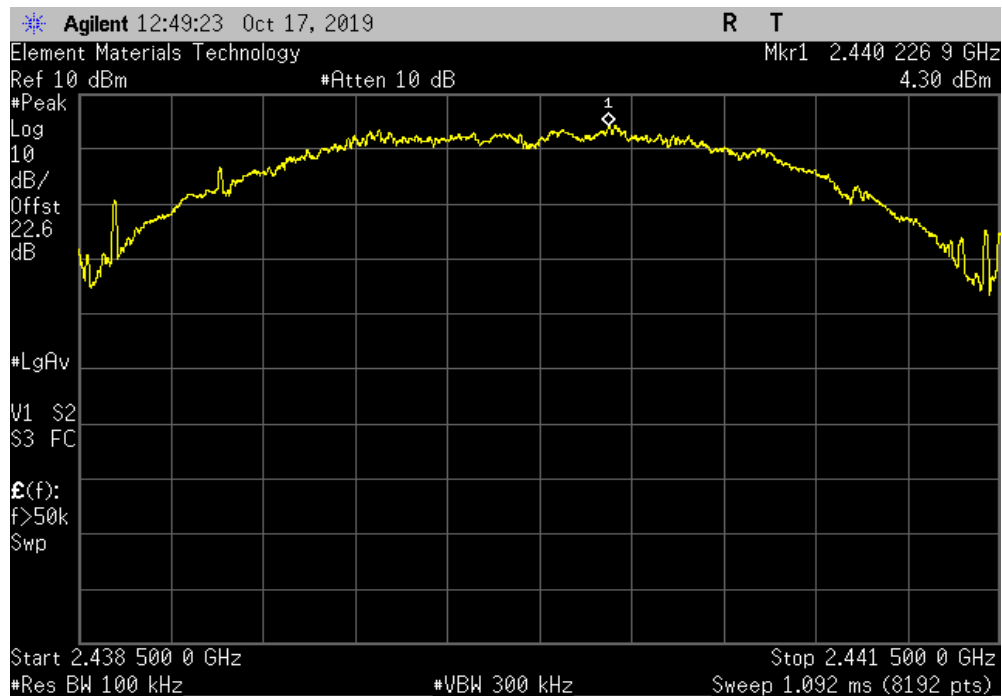


SPURIOUS CONDUCTED EMISSIONS




TUTX 2019.08.30.0 XMU 2019.09.05

WirelessHART (802.15.4) Mid Channel, 2440 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz	2878.4	-55.27	-20	Pass	

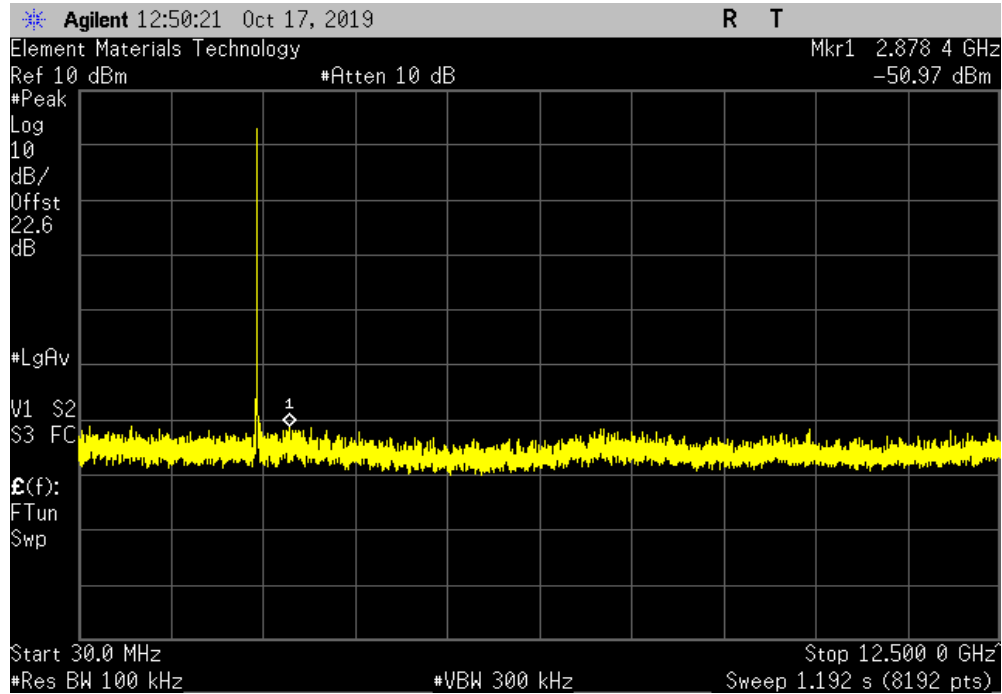

WirelessHART (802.15.4) Mid Channel, 2440 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	22544.6	-52.65	-20	Pass	

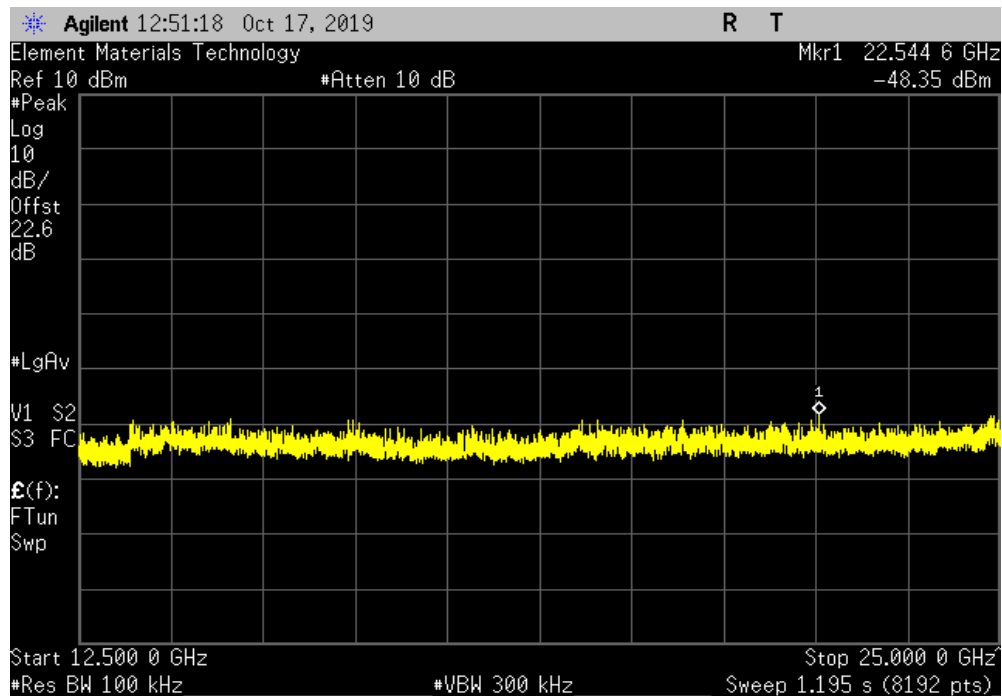


SPURIOUS CONDUCTED EMISSIONS




TUTTx 2019.08.30.0 XMI 2019.09.05

WirelessHART (802.15.4) High Channel, 2475 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	2475.22	N/A	N/A	N/A	

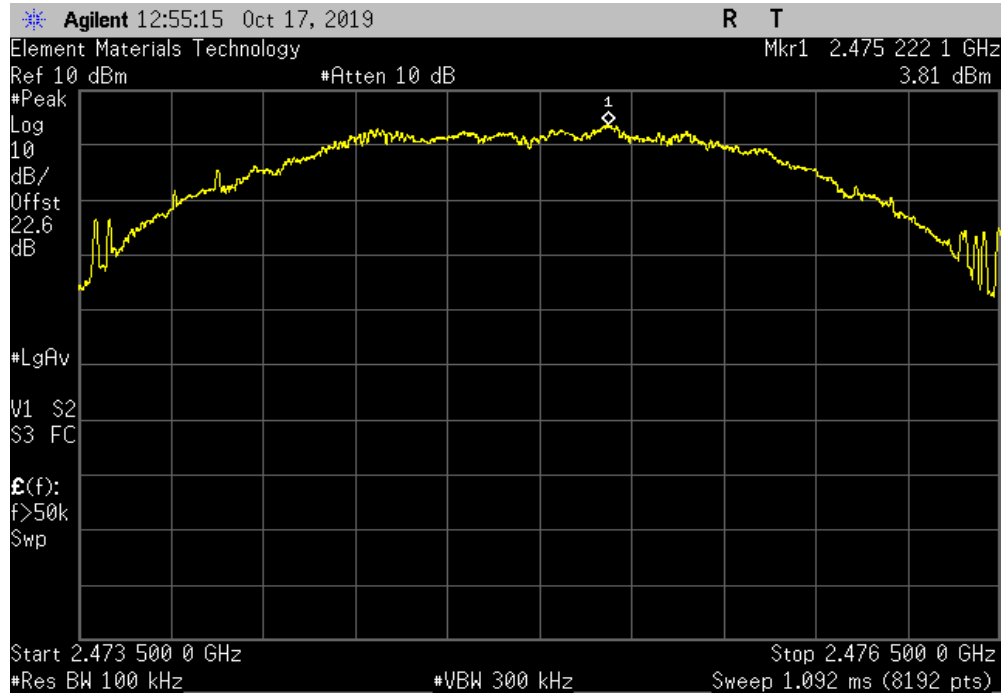

WirelessHART (802.15.4) High Channel, 2475 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz	820.1	-55.06	-20	Pass	

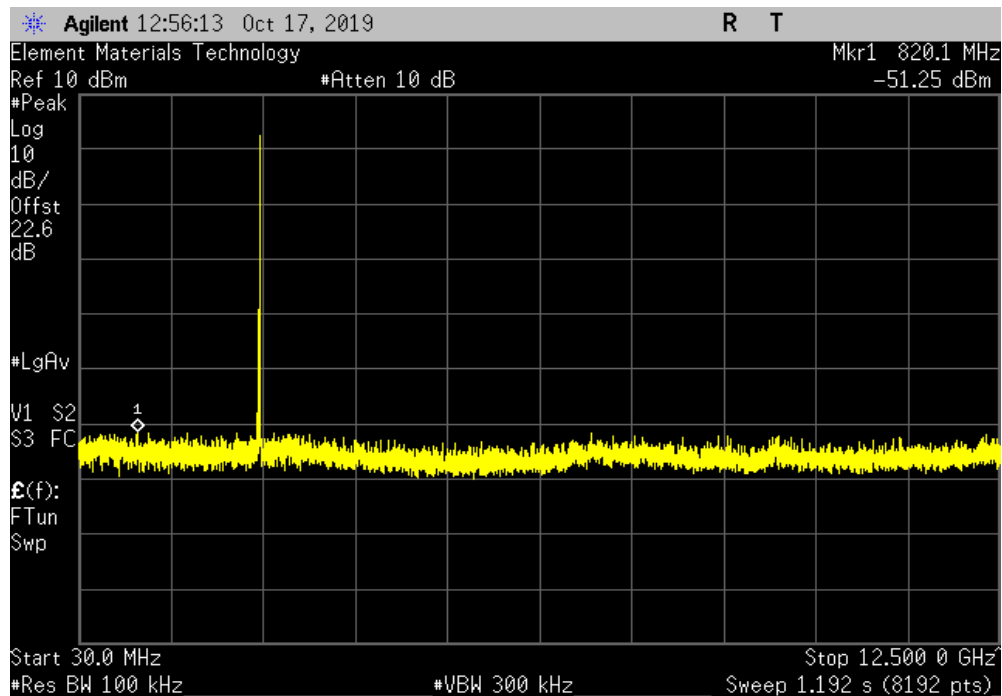

SPURIOUS CONDUCTED EMISSIONS



TbTtx 2019.08.30.0 XMI 2019.09.05

WirelessHART (802.15.4) High Channel, 2475 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	24897.8	-52.62	-20	Pass	

