


NO	PATNO	NAME	MATL	SHT	TREAT	REMARK	NO	PATNO	NAME	MATL	SHT	TREAT	REMARK
1	T-201B-0	TNC-P	_____	1	_____	_____	6	B-290BG	CONNECT TUBE	COPPER ALLOY	1	M-Au	_____
2	J-117BG	CONTACTOR	COPPER ALLOY	1	M-Au	_____	7	Q-219BU	STEEL WIRE	SWRH	1	M-Cu	_____
3	H-107PX	TUBE	NYLON+15%GF	1	BLACK	_____	8	A-134PX	CAP	NYLON+15%GF	1	BLACK	_____
4	Q-154BX	COIL	C5210	1	_____	_____	9	H-120BX	COPPER TUBE	BsT	1	_____	_____
5	I-193DXA	INSULATOR	DELRIN	1	_____	_____							

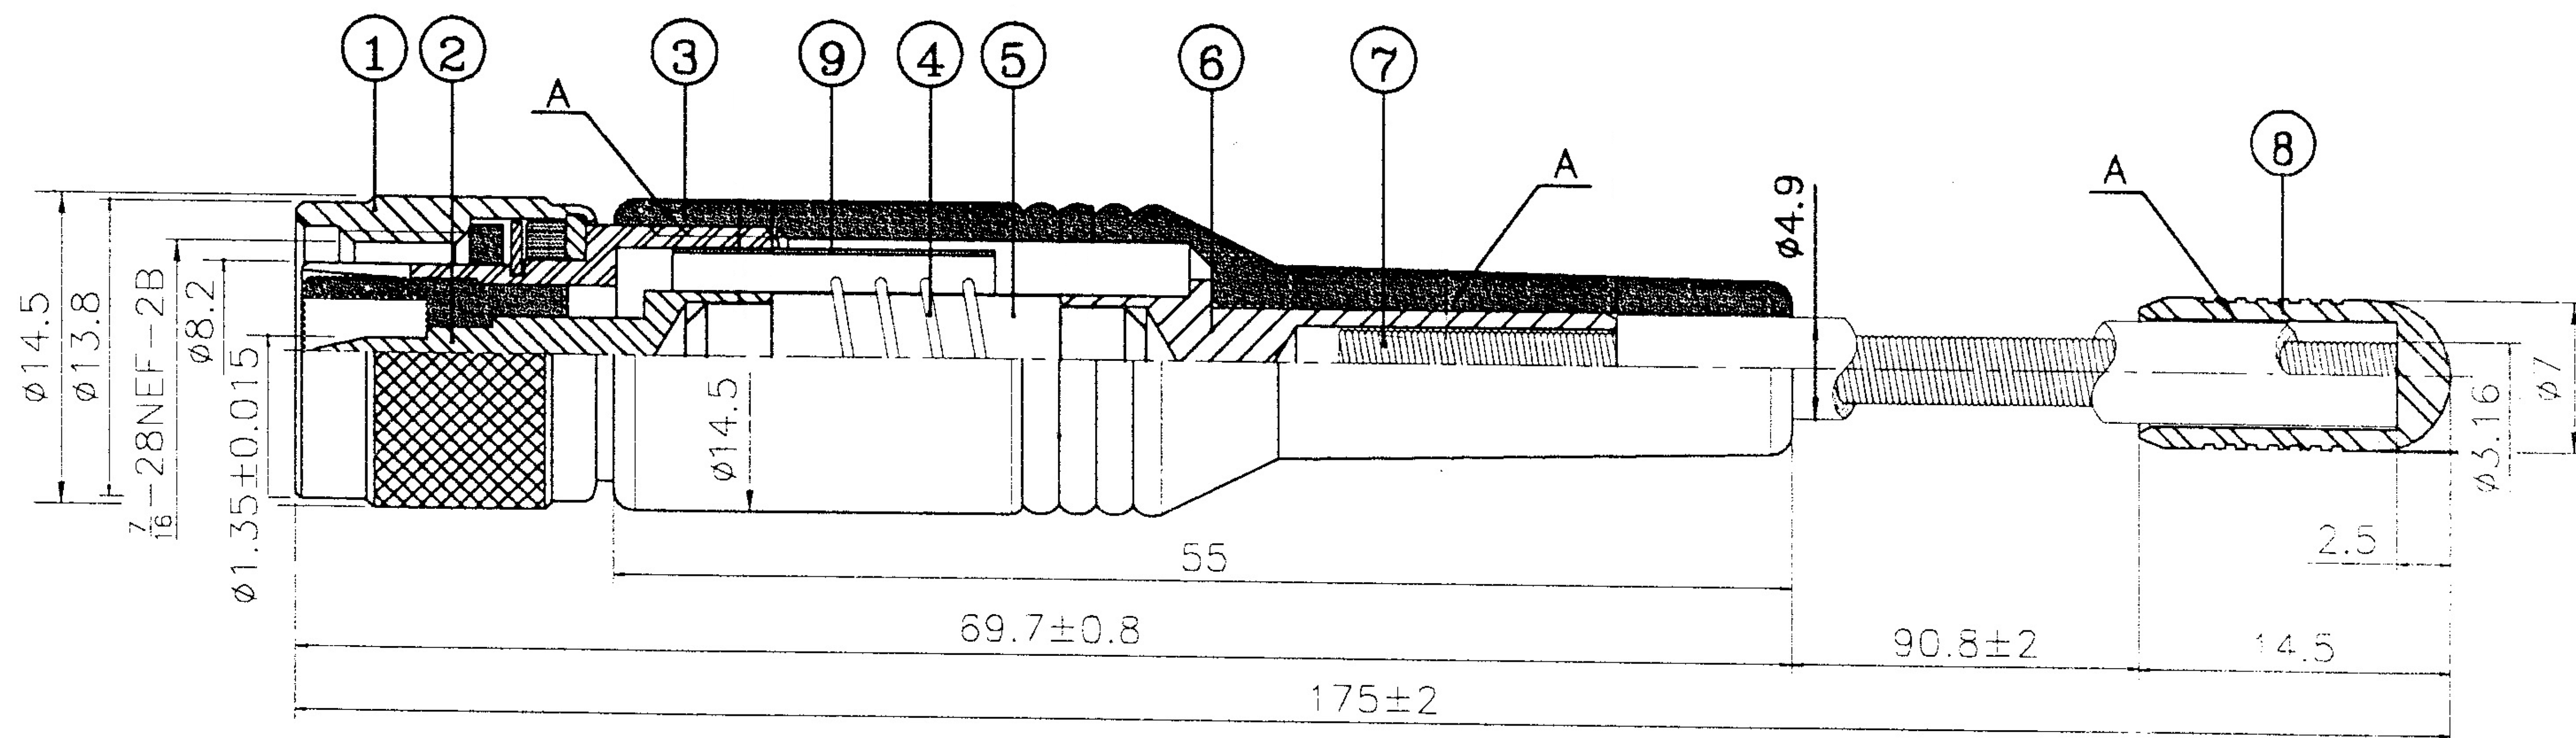

No	PERFORMANCE PARAMETER	DIPOLE ANTENNA REQUIREMENT
1	Operating Frequency	Frequency range: 868~915MHz
2	Gain	2.3 dB
3	Polarziation	Linear,vertical
4	Input Power Handing	10 W max.
5	Input Connector	TNC-P
6	Temperature Operating	-20~70°C
7	Temperature Storage	-40~+80°C

ISO-9001 CERTIFIED MANUFACTUER			MODEL	PLH-443TC	DATE	UNIT		DESIGNER	CHECKED	APPROVE
					12182003	mm				
			NAME	TNC ANTENNA	TOLERANCE	SCALE				
	NO.	56504100			± 0.2	2 X				