

Straubing, 20 April 2004

TEST - REPORT

No. 50217-40228-1

for

CAS E8x/E9x

Transceiver for Car-Immobilizer

Applicant: Bayerische Motoren Werke AG

Test Specification: FCC Code of Federal Regulations,
CFR 47, Part 15,
Section 15.209

Note:

The test data of this report relate only to the individual item which has been tested.
This report shall not be reproduced except in full extent without the written approval of
the testing laboratory.

Table of Contents

1. Administrative Data.....	3
2. Identification of Test Laboratory	Fehler! Textmarke nicht definiert.
3. Operation Mode of EUT.....	5
4. Configuration	6
5. Measuring Methods	7
5.1. Radiated Emission Measurement 9 kHz – 30 MHz.....	7
5.2. Field Strength of Emissions, Prescans in a fully-anechoic Room.....	8
5.3. Radiated Emission Measurement at Open Area Test Site.....	9
6. Photographs Taken During Testing	10
7. List of Measurements	13
8. Referenced Regulations	16
Charts taken during testing	17

1. Administrative Data

Test item (EUT)	
Type designation	CAS E8x/E9x
Serial number(s):	9046186 (System) 6.943.744, 6.933.708, 6.933.712 (Part numbers)
Type of equipment:	Transceiver for Car-Immobilizer
Parts/accessories:	Control-box, Key-lock, Start-button
FCC-ID:	
Technical data	
Frequency range	119 – 135 kHz
Operational frequencies	125 kHz
Type of modulation	10K0A1D
Pulse frequency	N/A
Pulse width	N/A
Antenna	Integrated Coil
Power supply	12 V regulated lead acid battery
Applicant: (full address)	Bayerische Motoren Werke AG BMW Haus Pertuelring 130 D 80788 München Germany
Contract identification:	---
Contact person:	Mr. Richard Hochleitner
Manufacturer:	Siemens VDO AG
Application details	
Receipt of EUT:	2 April 2004
Date of test:	April 2004
Note:	
Responsible for testing:	Martin Steindl
Responsible for test report:	Martin Steindl

2. Identification of Test Laboratory**DETAILS OF THE TEST LABORATORY**

COMPANY NAME:	Senton GmbH EMI/EMC Test Center
ADDRESS:	Aeussere Fruehlingsstrasse 45 D-94315 Straubing Germany
LABORATORY ACCREDITATION:	DAR-Registration No. TTI-P-G 062/94-01
FCC TEST SITE LISTING	90926
INDUSTRY CANADA TEST SITE REGISTRATION	IC 3050
NAME FOR CONTACT PURPOSES:	Mr. Johann Roidt
TELEPHONE: (+49) (0)9421 5522-0	FAX: (+49) (0)9421 5522-99

PERSONNEL INVOLVED IN THIS TEST REPORT

LABORATORY MANAGER:	 Mr. Johann Roidt
RESPONSIBLE FOR TESTING:	Mr. Martin Steindl
RESPONSIBLE FOR TEST REPORT:	Mr. Martin Steindl

SUMMARY OF TEST RESULTS

The tested sample complies with the requirements set forth in the
Code of Regulations CFR 47, Part 15, Section 15.209

3. Operation Mode of EUT

When the key (transponder of system) is in the key-lock the system transmits.

4. Configuration

Configuration of the EUT
Not applicable

Cables connected to the EUT			
Description	Classification	Cable type	Maximum cable length
DC-supply	DC power	Unshielded	> 3m
Antenna / signaling-supply	signal/control port	Unshielded	0.6 m

Peripheral devices connected to the EUT
Not applicable

5. Measuring Methods

5.1. Radiated Emission Measurement 9 kHz – 30 MHz


Rules and Specifications:	Sections 15.109 & 15.209
Guide:	ANSI C63.4 1997

Measurement Procedure:

Radiated emissions in the frequency range 9 kHz – 30 MHz were measured initially at a distance of 3 meters. A prescan at 3 meter distance were performed in a shielded room with the detector of the spectrum analyzer or EMI Receiver set to peak. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.

Final measurement is then performed at 30 meter distance. In case the regulation requires testing at other distances, the result will be extrapolated. The extrapolation factor is determined by making a second measurement at 10 meter distance. In cases of very low emissions measurements are performed at shorter distances and results are extrapolated to the required distance. The provisions of 15.31 (d) apply.

According to section 15.209 (d) final measurement is performed with the detector set to Quasi Peak except for the frequency bands 9 – 90 kHz and 110 – 490 kHz where average detector is employed.

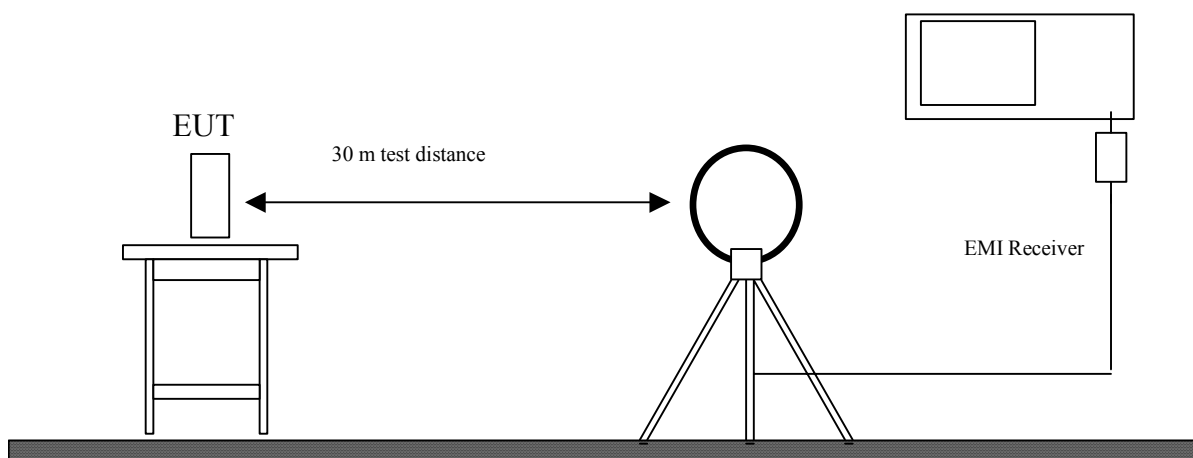

Test instruments used:

No.	Type	Model	Serial Number	Manufacturer
01	Test receiver	ESH 3	880112/032	Rohde & Schwarz
02	Loop antenna	HFH2-Z2	882964/1	Rohde & Schwarz
03	Open Field Test Site	No. 1	N/A	Senton


5.2. Field Strength of Emissions, Prescans in a fully-anechoic Room

Rules and Specifications:	Sections 15.109 & 15.209
Guide:	ANSI C63.4 1997

Measurement Procedure:

Radiated emissions are measured over the frequency range from 30 MHz to the 5th harmonic of the maximum frequency of the EUT.

Measurements were made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution bandwidth set to 100 kHz. All tests were performed at a test-distance of 3 meters. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. For final testing an open-area test-site was used. During the tests the EUT is rotated all around to find the maximum levels of emissions. The cables and equipment were placed and moved within the range of position likely to find their maximum emissions.

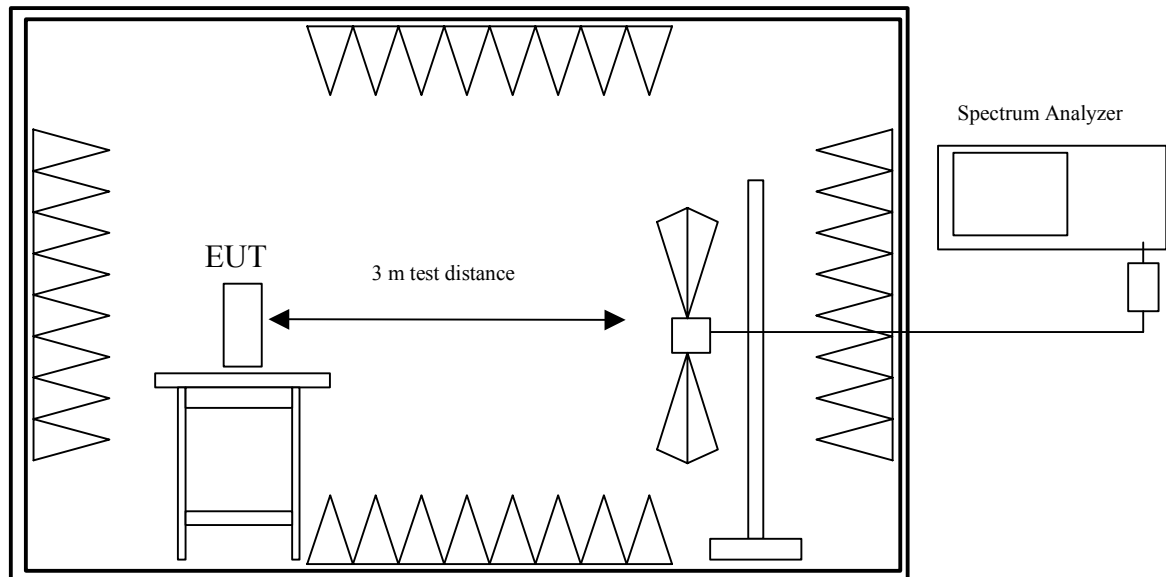

Fully anechoic chamber

Test instruments used:

No.	Type	Model	Serial Number	Manufacturer
01	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
113	Preamplifier	CPA9231A	3393	Schaffner
141	Biconical antenna	HK 116	829708/006	Rohde & Schwarz
143	Log. periodic antenna	3147	9112-1054	EMCO
145	Horn antenna	3115	9508-4553	EMCO
146	Horn antenna set	3160-03/-09	9112-1003	EMCO
114	Preamplifier 1-8 GHz	AFS3-00100800-32-LN	847743	Miteq
115	Preamplifier 8-18 GHz	ACO/180-3530	32641	CTT
003	Fully anechoic room	No. 2	1452	Albatross Projects

5.3. Radiated Emission Measurement at Open Area Test Site

Rules and Specifications:	Sections 15.109 & 15.209
Guide:	ANSI C63.4 1997


Measurement Procedure:

Radiated emissions are measured in the frequency range 1 GHz to 8 GHz. Resolution and video bandwidth of the spectrum analyzer are set to 1 MHz. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. Additional measurements are performed at critical frequencies with reduced span.

EUT is rotated all around and receiving antenna is raised and lowered to find the maximum levels of emission. The cables and equipment are placed and moved within the range of position likely to find their maximum emissions.

All tests are performed in a fully-anechoic chamber with a test-distance of 3 meters.

If required preamplifiers are used for the whole frequency range. Special care is taken to avoid overload in transmit mode (using appropriate attenuators and filters if necessary).

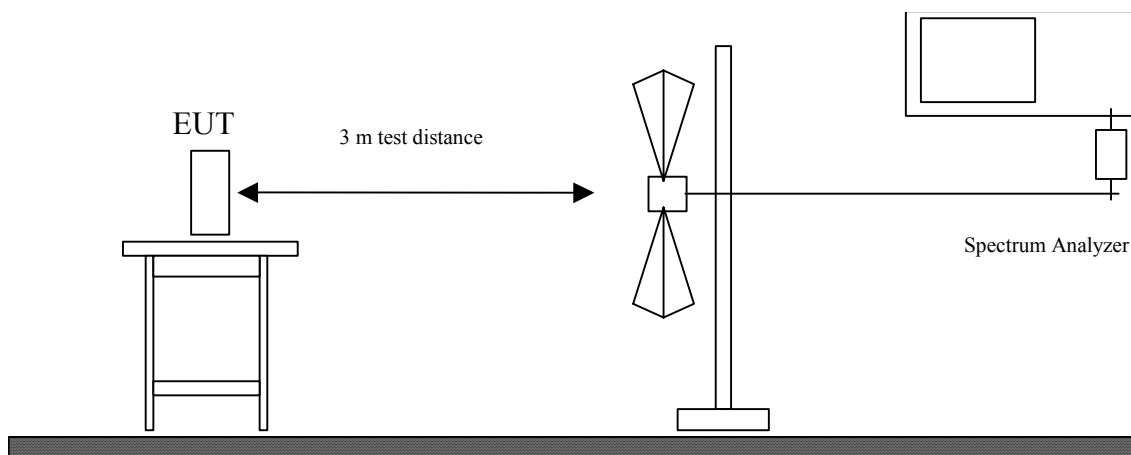


Test instruments used:


No.	Type	Model	Serial Number	Manufacturer
01	EMI Receiver	ESVP	881414/009	Rohde & Schwarz
141	Biconical antenna	HK 116	829708/006	Rohde & Schwarz
143	Log. periodic antenna	3147	9112-1054	EMCO
145	Horn antenna	3115	9508-4553	EMCO
146	Horn antenna set	3160-03/-09	9112-1003	EMCO
114	Preamplifier 1-8 GHz	AFS3-00100800-32-LN	847743	Miteq
115	Preamplifier 8-18 GHz	ACO/180-3530	32641	CTT
003	Open Field Test Site	No. 1	N/A	Senton

6. Photographs Taken During Testing

**Test setup for radiated emission measurement
(fully anechoic room)**

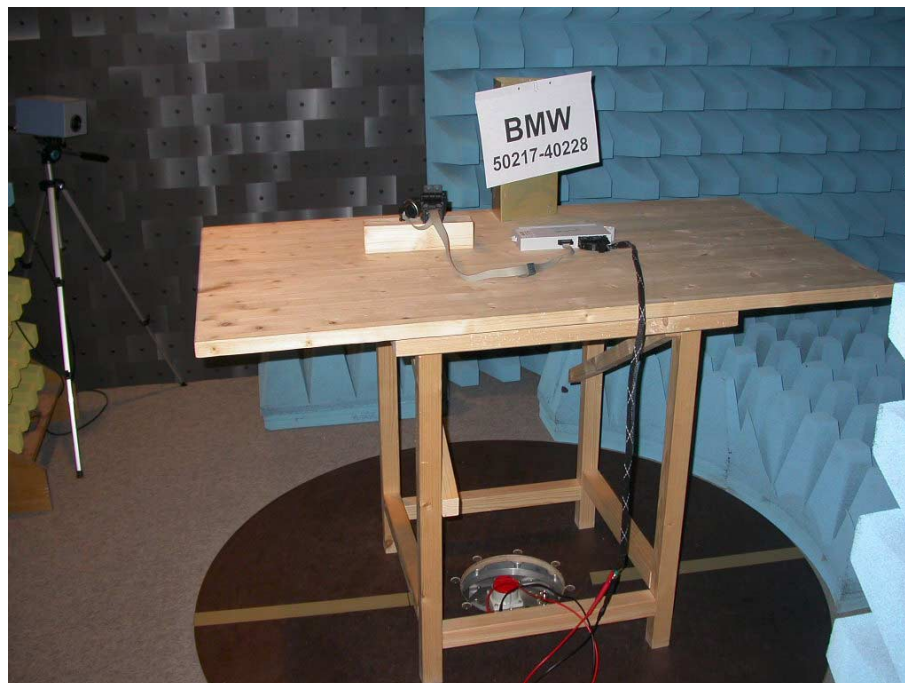

**Test setup for radiated emission measurement
(Open area test-side)**

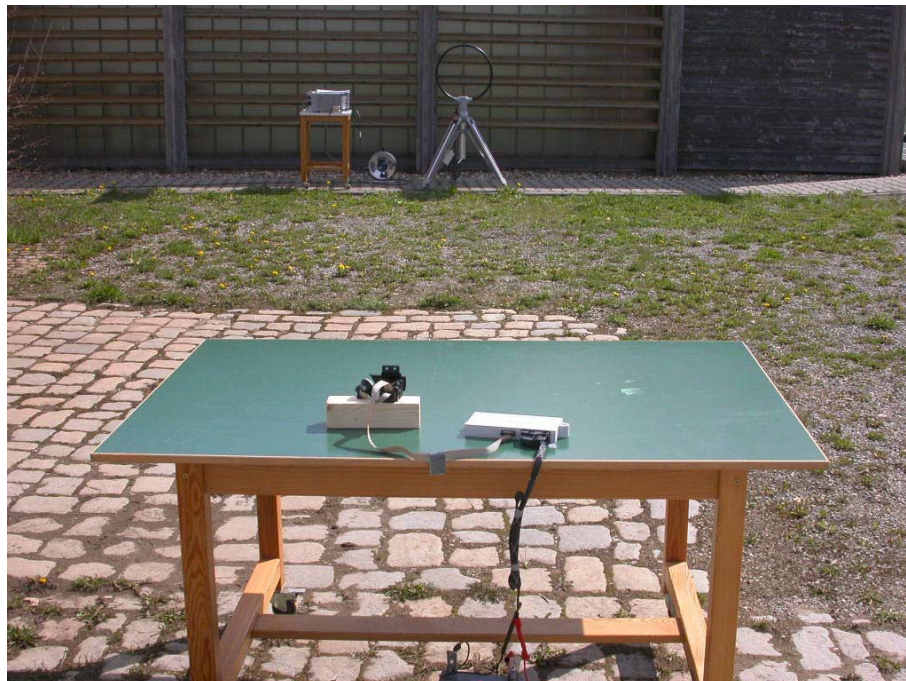

7. List of Measurements

FCC Part 15			
Section(s):	Test	Page(s)	Result
	15.205 Restricted Bands		Pass
	15.207 AC Powerline Emissions	---	Not Applicable
15.109	Radiated Spurious emissions		Pass

Fieldstrength of Emission 9 kHz – 30 MHz

Rules and Specifications:	15.109, 125.209 Radiated Emission Limits		
Guide:	ANSI C63.4		
Limit:	Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:		
	Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
	0.009 - 0.490	2400/F(kHz)	300
	0.490 - 1.705	24000/F(kHz)	30
	1.705 – 30	30	30

Tested Frequency:	125 kHz
Test Site:	Open Area Test Site
Distance:	30 Meter

Frequency (MHz)	Detector	Antenna Polarization	Analyzer Reading (dBµV)	Correction Factor (dB/m)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
0.125	AV	Hor/Ver	-6.6	20	13.4	65.67	52.3
0.375	AV	Hor/Ver	-21.5	20	-1.5	56.12	57.6

*** = All emissions showed more than 20 dB margin to the limit

Sample calculation of erp values:

Field Strength (dBµV/m) = Analyzer Reading (dBµV) + Correction Factor (dB/m)

Test Results:	Pass
---------------	------

Fieldstrength of Emission

Rules and Specifications:	15.109, 125.209 Radiated Emission Limits	
Guide:	ANSI C63.4	
Limit:	Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:	
	Frequency of Emission (MHz)	Field Strength (microvolts/meter)
	30 - 88	100
	88 - 216	150
	216 - 960	200
	Above 960	500

Tested Frequency:	125 kHz
Test Site:	Open Area Test Site (< 1 GHz), Fully anechoic chamber (> 1 GHz)
Distance:	3 Meter

Frequency (MHz)	Detector	Antenna Polarization	Analyzer Reading (dBμV)	Correction Factor (dB/m)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30 - 1000					***		

*** = All emissions showed more than 20 dB margin to the limit

Sample calculation of erp values:

Field Strength (dBμV/m) = Analyzer Reading (dBμV) + Correction Factor (dB/m)

Test Results:	Pass
----------------------	------

8. Referenced Regulations

All tests were performed with reference to the following regulations and standards:

☒	FCC Part 2	Code of Federal Regulations Part 2 Frequency allocation and radio treaty matters; General rules and regulations	October 01, 1999
☐	FCC Part 15 Subpart A	Code of Regulations Part 15 (Radio Frequency Devices), Subpart A (General) of the Federal Communication Commission (FCC)	October 20, 1997
☐	FCC Part 15 Subpart B	Code of Regulations Part 15 (Radio Frequency Devices), Subpart B (Unintentional Radiators) of the Federal Communication Commission (FCC)	October 20, 1997
☒	FCC Part 15 Subpart C	Code of Regulations Part 15 (Radio Frequency Devices), Subpart C (Intentional Radiators) of the Federal Communication Commission (FCC)	October 20, 1997
☐	FCC Part 74 Subpart H	Code of Regulations Part 15 (Radio Frequency Devices), Subpart H (Low Power Auxiliary Stations) of the Federal Communication Commission (FCC)	October 20, 1997
☒	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz - 40 GHz	October, 1992
☐	RSS-210	Radio Standards Specification RSS-210 Issue 2 for Low Power Licence-Exempt Radiocommunication Devices of Industry Canada	February 24, 1996

Charts taken during testing

Radiated Emission Test 9 kHz - 30 MHz according to FCC Part 15 Subpart C

Model:
CAS E8x/E9x

Serial no.:
9046186

Applicant:
BMW AG

Test site:
Shielded room, cabin no. 2

Tested on:
Test distance 3 metres

Date of test:
04/15/2004

Operator:
M. Steindl

Test performed:
automatically

File name:

Mode:

- DC 12 V power supply

- key in


- transmitting continuously

Detector:

Peak / Final Results: QP

Final results:

Selected by hand

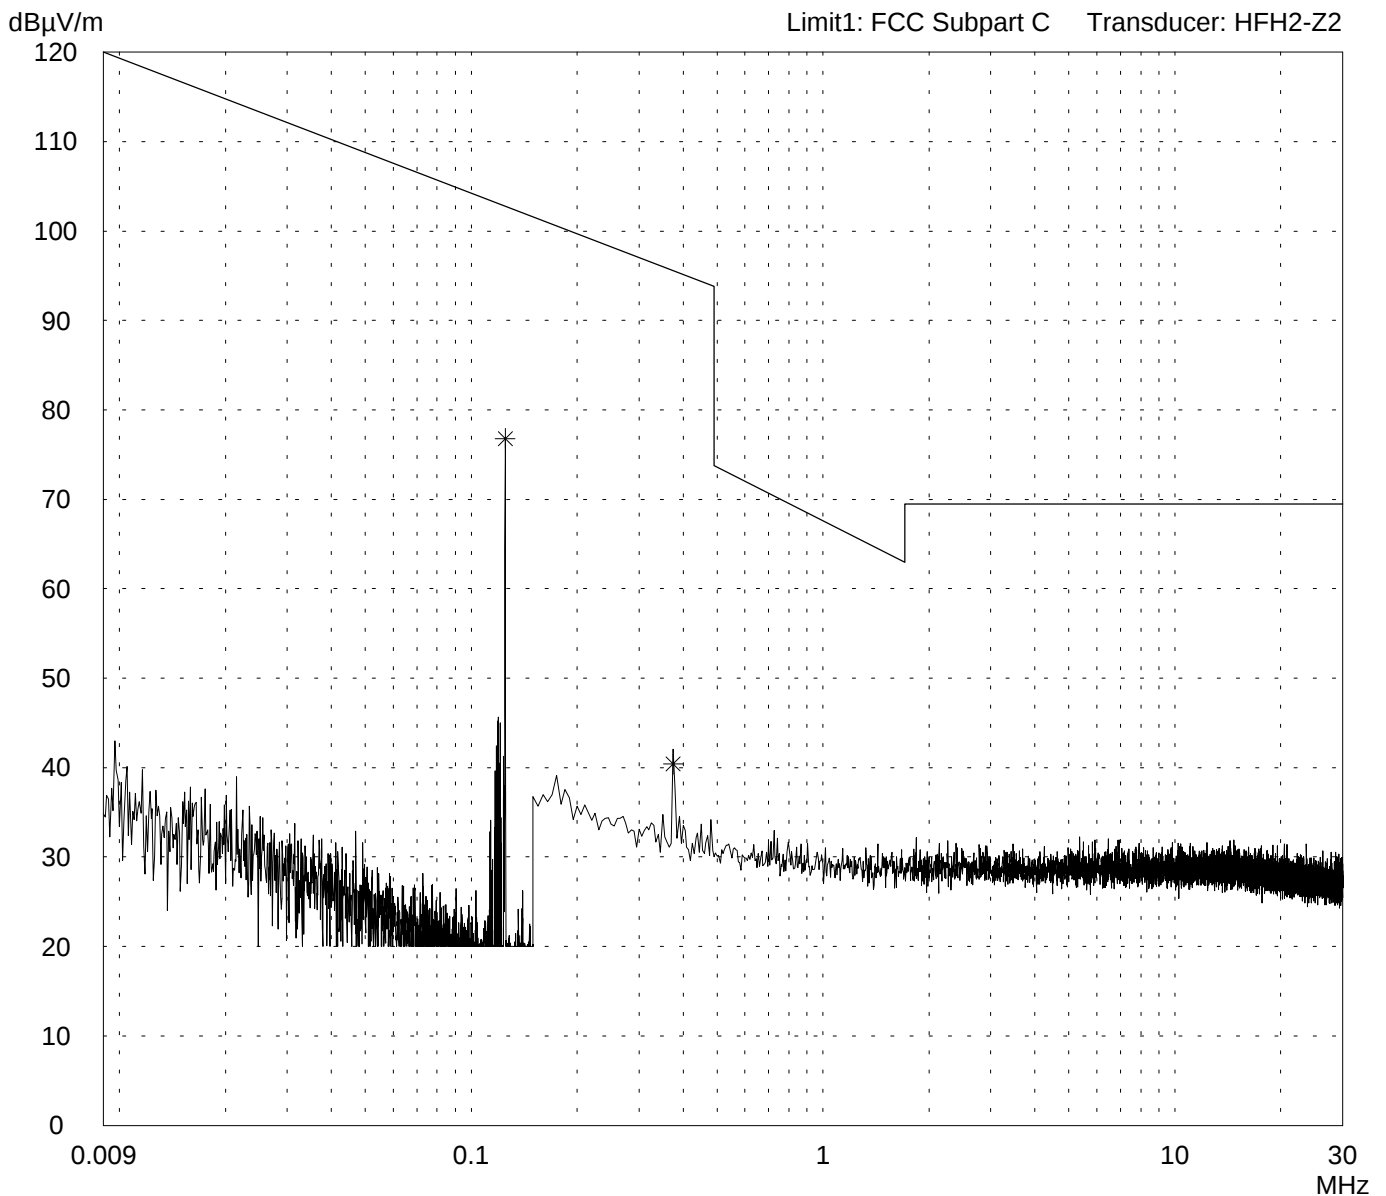

Result:
Prescan

Project file:
50217-40228-1

Page of Pages

Radiated Emission Test 9 kHz - 490 kHz according to FCC Part 15 Subpart C

Model:
CAS E8x/E9x

Serial no.:
9046186

Applicant:
BMW AG

Test site:
Shielded room, cabin no. 2

Tested on:
Test distance 3 metres

Date of test:
04/15/2004

Operator:
M. Steindl

Test performed:
automatically

File name:

Mode:

- DC 12 V power supply

- key in

- transmitting continuously

Detector:

Average / Final Results: AV


Final results:

Selected by hand

dB μ V/m

Limit1: FCC Subpart C

Transducer: HFH2-Z2

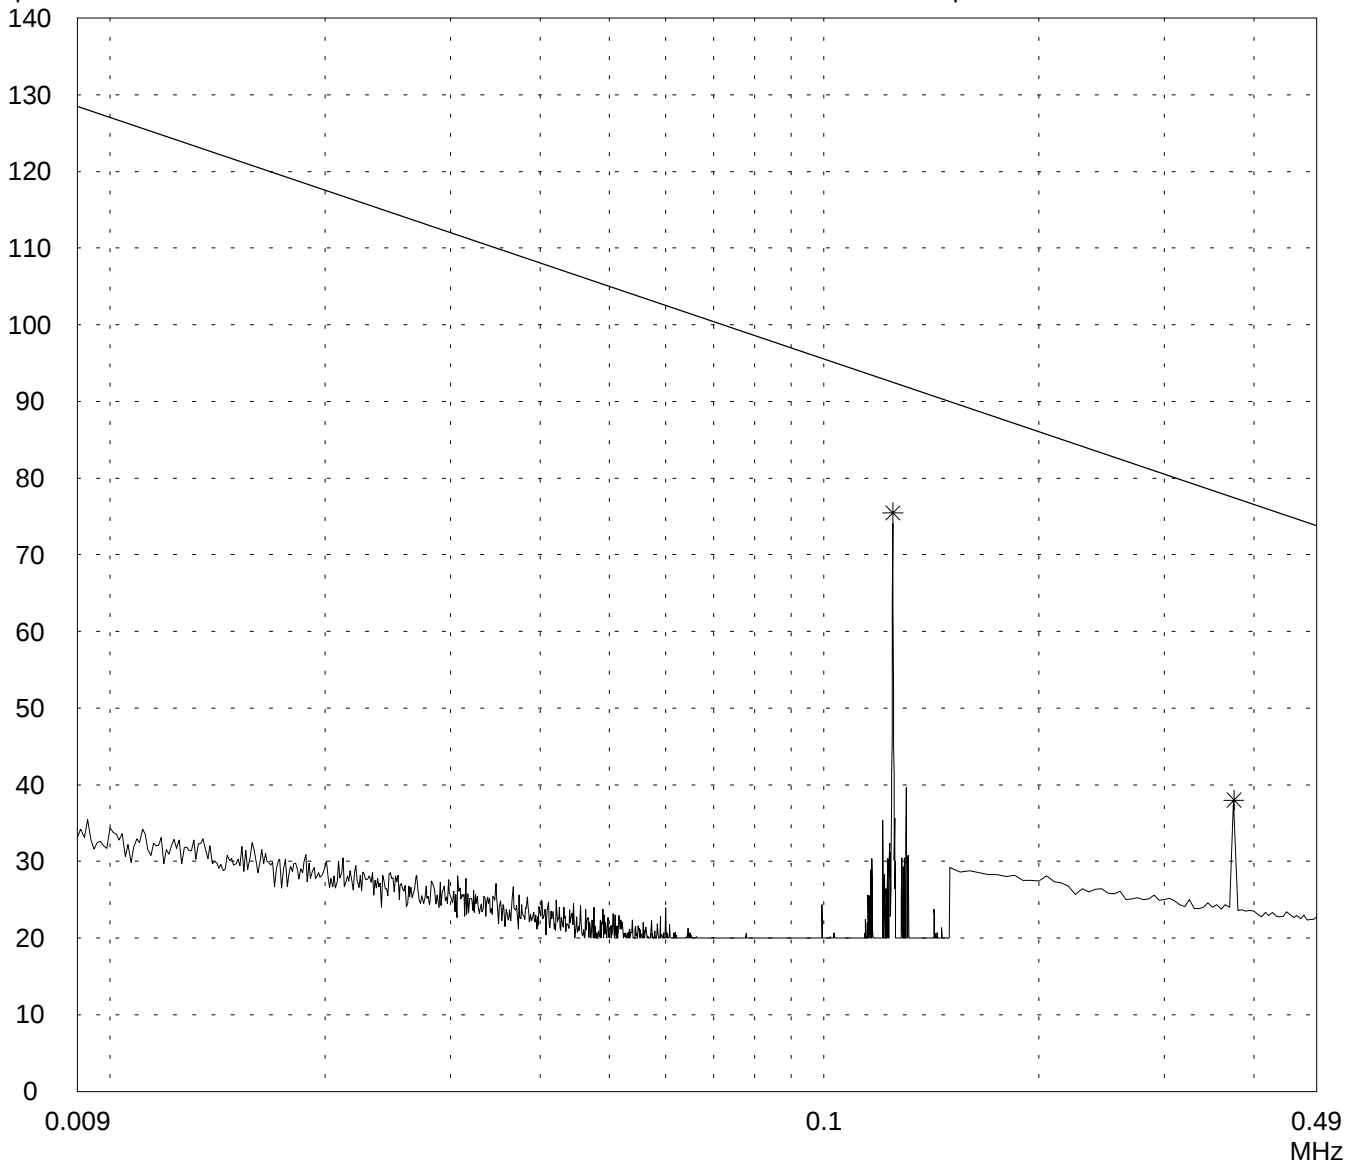

Result:
Prescan

Project file:
50217-40228-1

Page of Pages

Restricted Bands Requirement according FCC Part 15.205

Model:
CAS E8x/E9x

Serial No.:
9046186

Applicant:
BMW AG

Mode:
- DC 12 V power supply


- key in

- transmitting continuously

Ref.Level 107 dBuV
10 dB/Div.

ATT 10 dB

Ref. Offset 20 dB

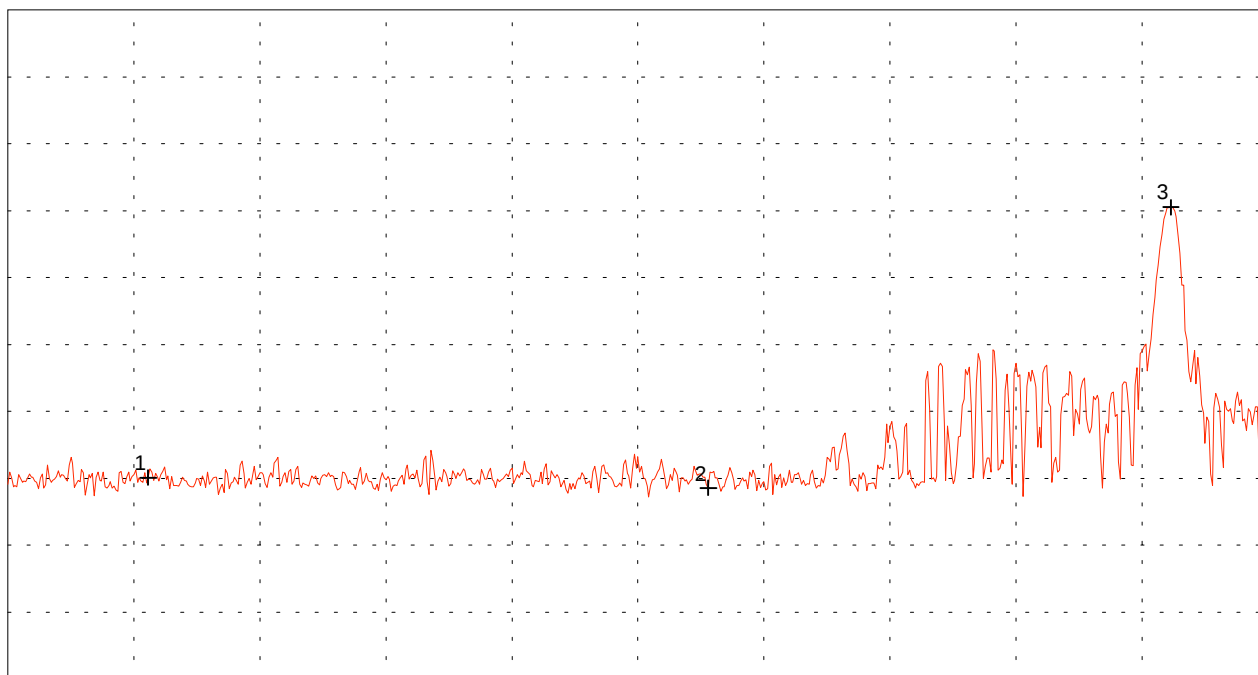

Start 85.000 kHz
RBW 300 Hz

VBW 1 kHz

Stop 130.000 kHz
SWP 1 s

Multi Marker List

No. 1	90.000 kHz	37.09 dBuV
No. 2	110.000 kHz	35.56 dBuV
No. 3	126.530 kHz	77.53 dBuV

Tested by:
M. Steindl

Date:
04/15/2005


Project-No.:
50217-40228-1

Page of pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: CAS E8x/E9x	Comment: - DC 12 V power supply - key in - transmitting continuously
Serial no.: 9046186	
Applicant: BMW AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 04/15/2004	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: 10 dB Margin 50 Subranges
--------------------------	--

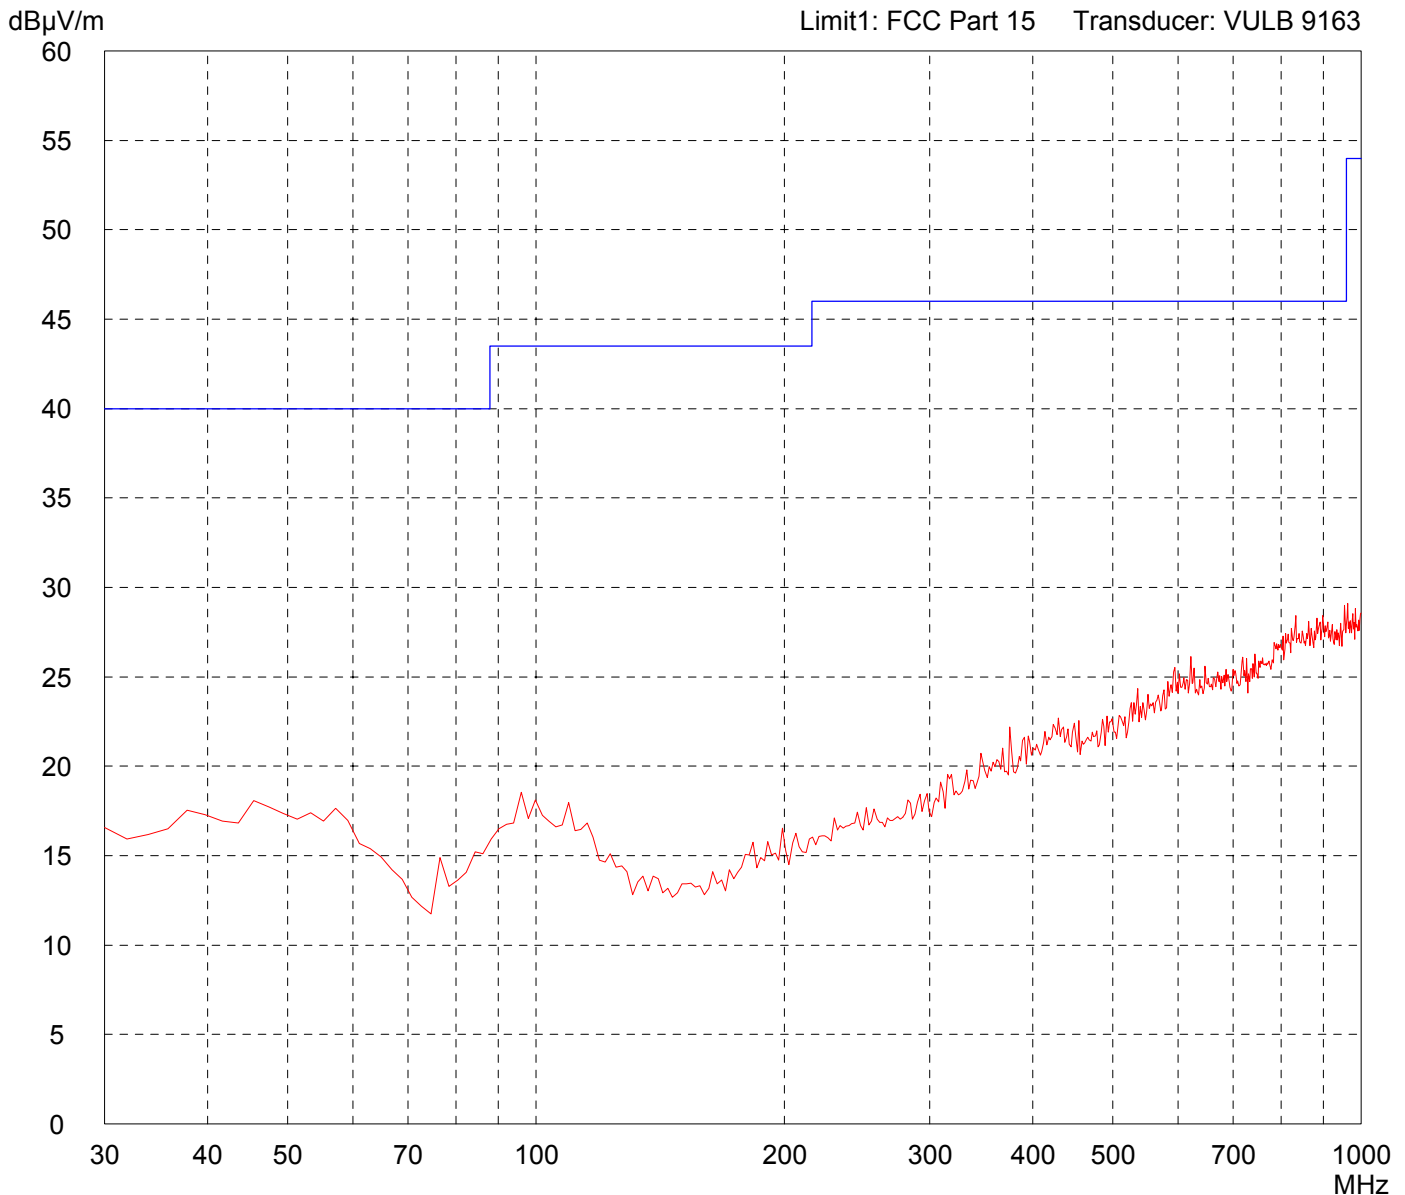


Result: Prescan	Project file: 50217-40228-1
	Page of Pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: CAS E8x/E9x	Comment: - DC 12 V power supply - key in - transmitting continuously
Serial no.: 9046186	
Applicant: BMW AG	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 04/15/2004	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: 10 dB Margin 50 Subranges
--------------------------	--

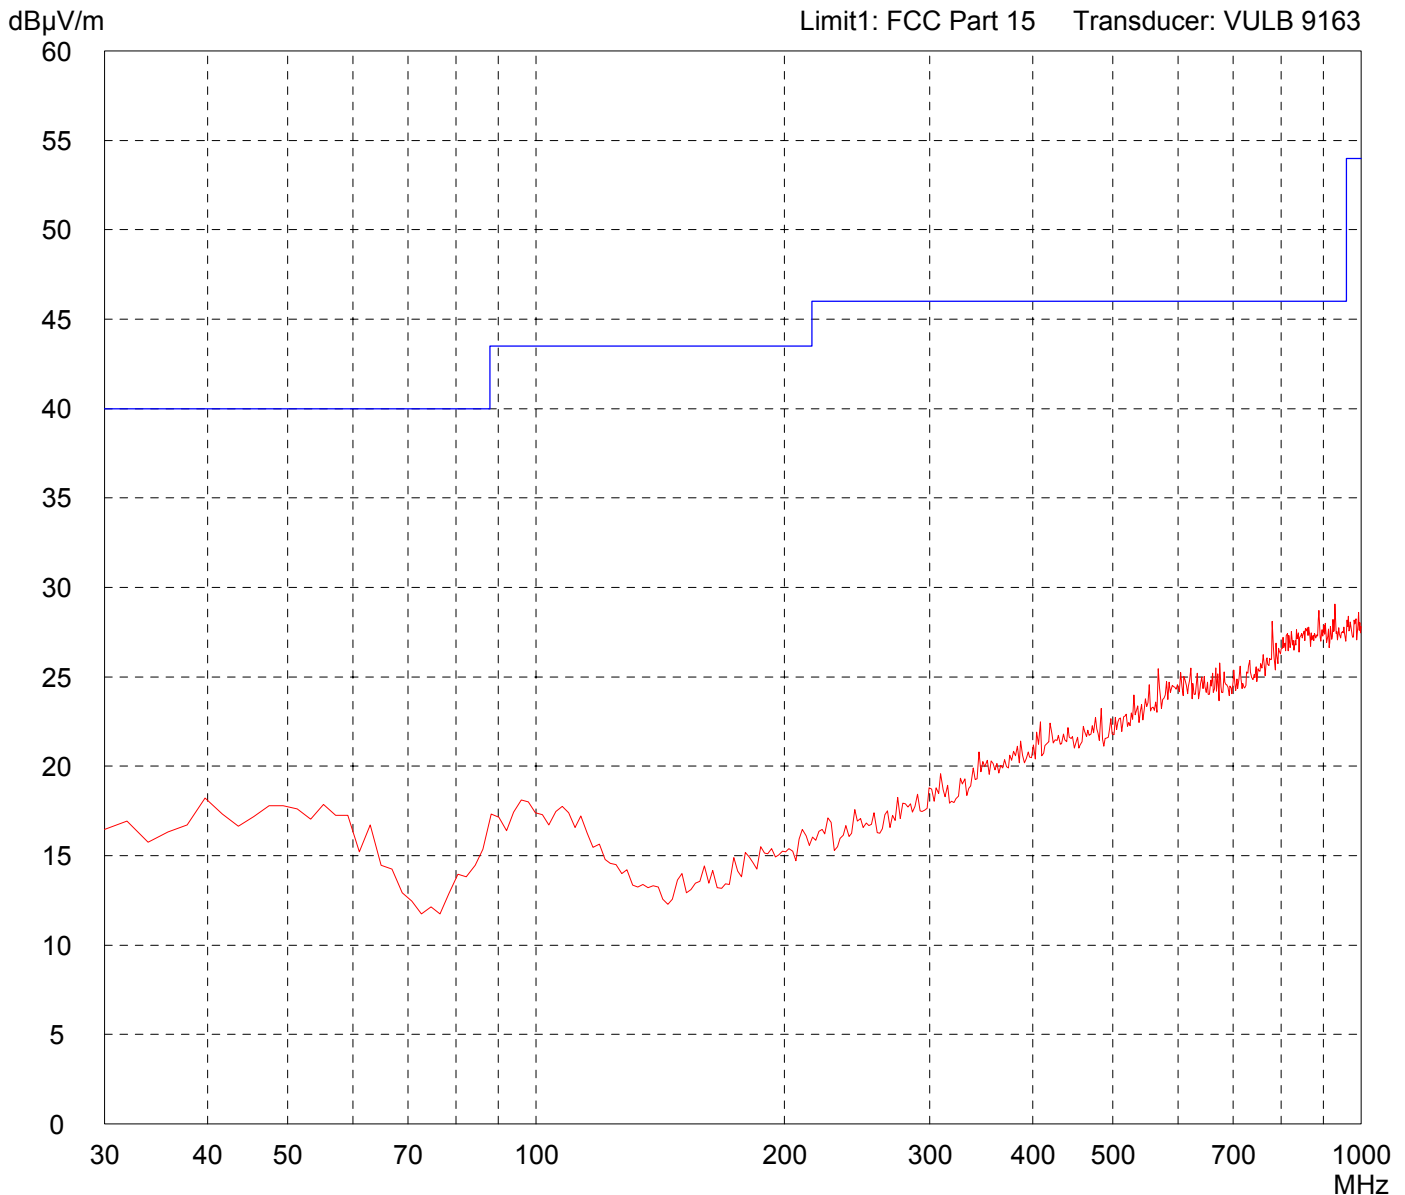

Result: Prescan	Project file: 50217-40228-1
---------------------------	---------------------------------------

Page of Pages