

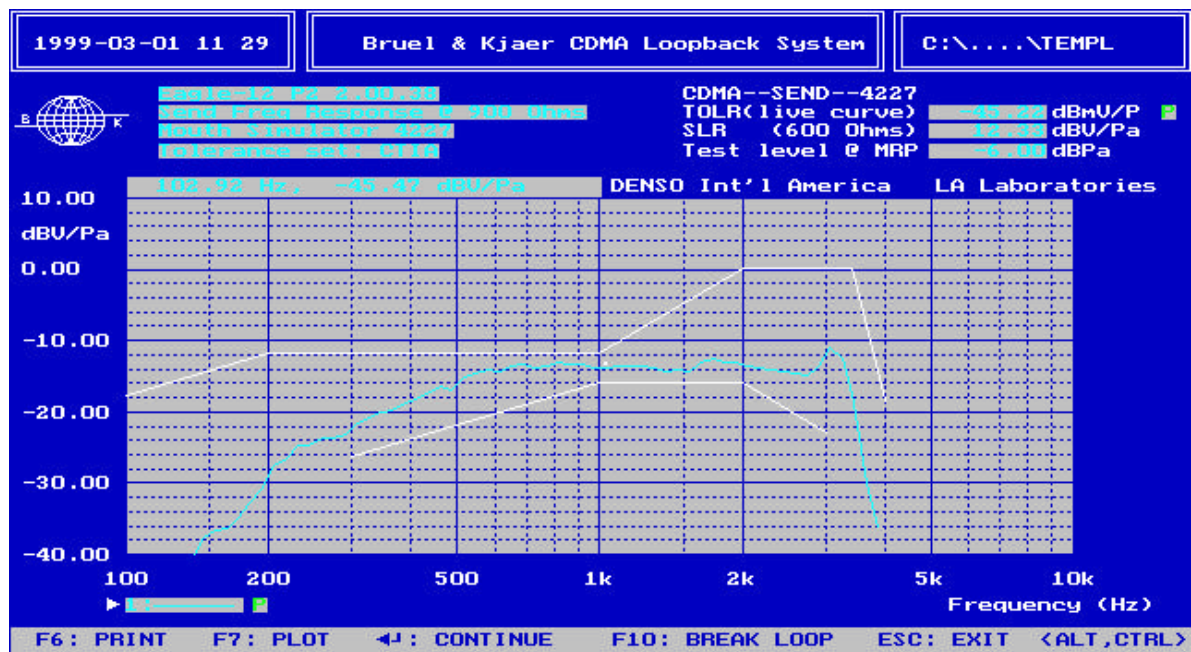


FIGURE 1: Transmit Audio Frequency Response and TOLR (CDMA)

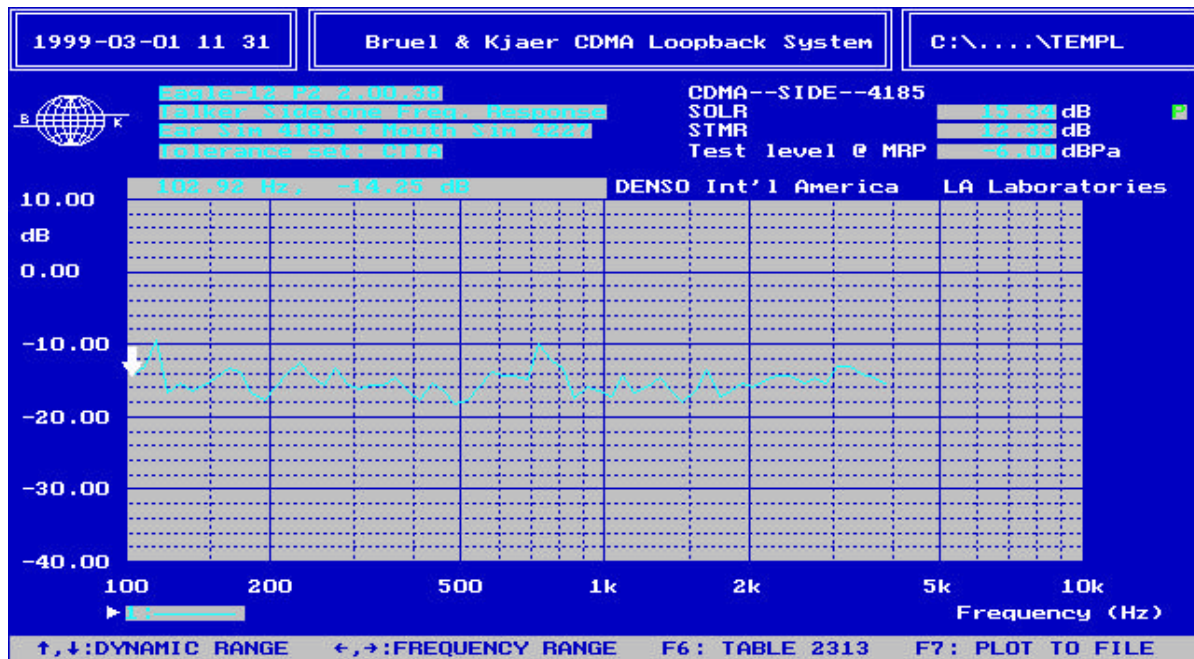


FIGURE 2: Send Audio Sidetone Frequency Response and SOLR (CDMA)

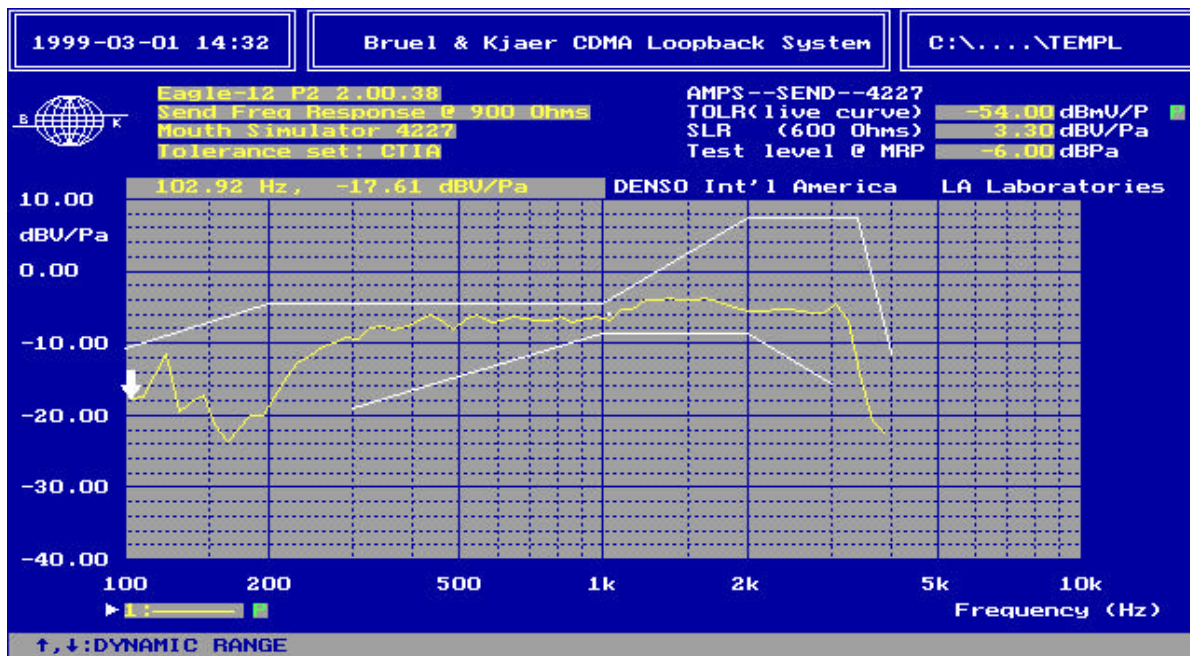


FIGURE 3: Transmit Audio Frequency Response and TOLR (AMPS)

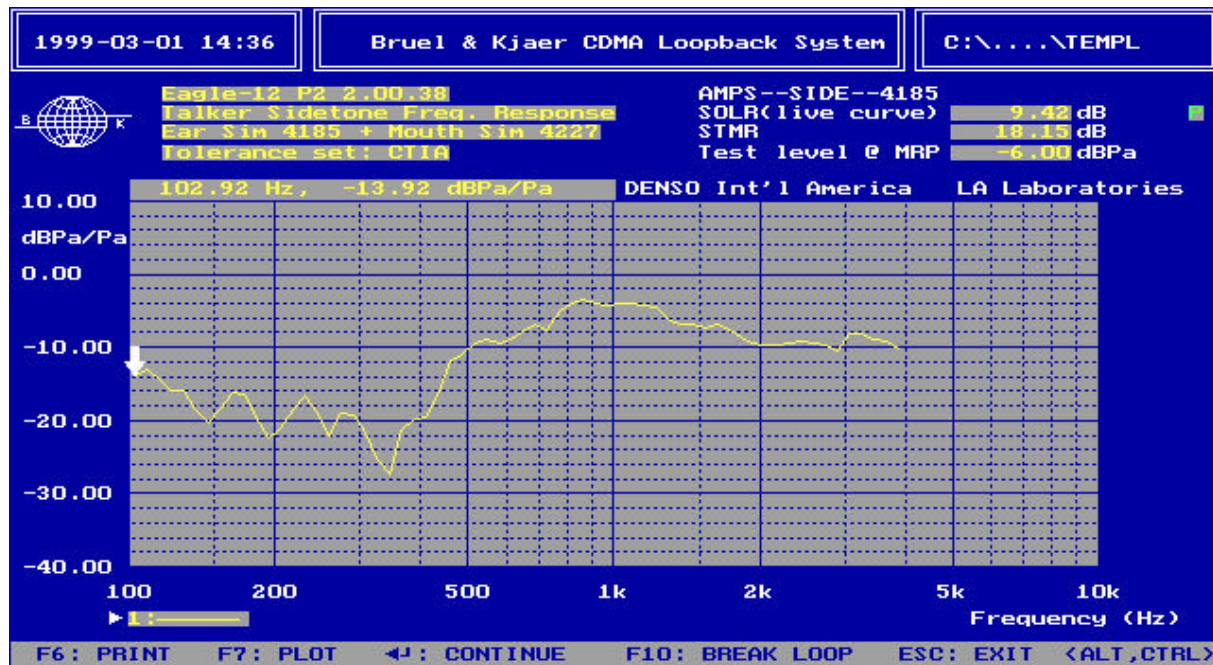


FIGURE 4: Transmit Audio Sidetone Frequency Response and SOLR (AMPS)

**PCTEST Engineering Lab., Inc.**

**Subject:** Modulation Characteristics  
FCC Part 24/22

**Test Report No.:** 24/22.990308149.LXC  
**Test Date:** 03.08.99

**EUT:** DENSO Dual-Band Analog/PCS Phone (AMPS/CDMA)  
**Model:** E120  
**FCC ID:** LXC-E120

**MODE:** Audio 1V = 0dB @ 2.5 kHz

## Modulation Limiting

