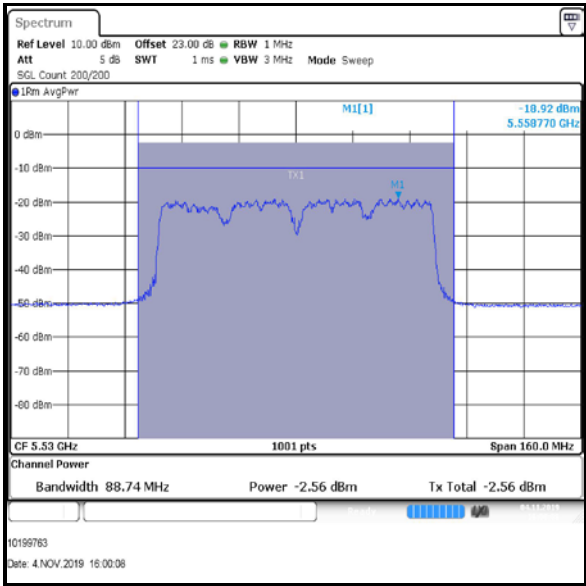
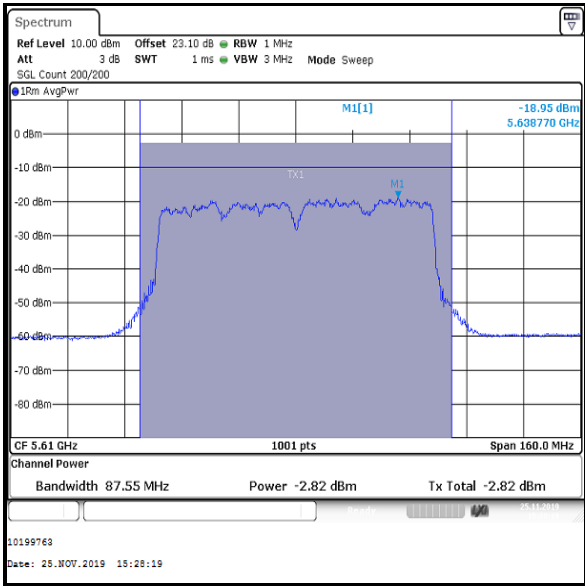


Transmitter Maximum Conducted Output Power (5.47-5.725 GHz band) (continued)

Results: 802.11ac / 80 MHz / MIMO / 2Tx CDD / 256-QAM / MCS9x1 / Port 1 (reference plots)

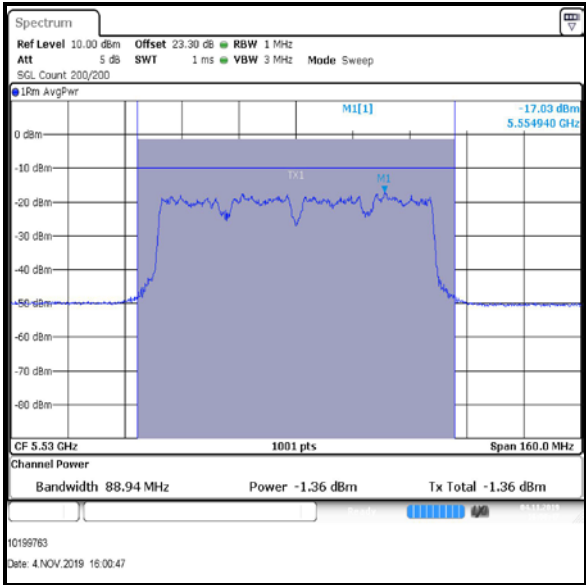


Bottom Channel

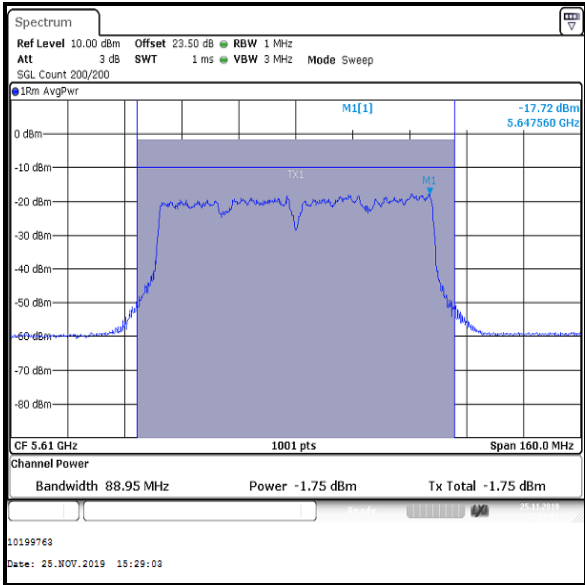


Top Channel

Results: 802.11ac / 80 MHz / MIMO / 2Tx CDD / 256-QAM / MCS9x1 / Port 2 (reference plots)



Bottom Channel



Top Channel

Transmitter Maximum Conducted Output Power (5.47-5.725 GHz band) (continued)**Results: 802.11n / 20 MHz / MIMO / 3Tx CDD / 64-QAM / MCS7 (reference plots)**

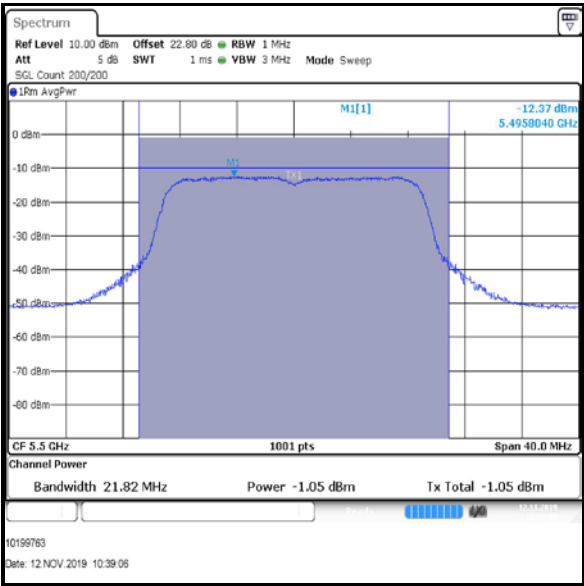
Channel	Frequency (MHz)	Port 1			Port 2		
		Conducted Power (dBm)	Duty Cycle correction factor (dB)	Corrected Conducted Power (dBm)	Conducted Power (dBm)	Duty Cycle correction factor (dB)	Corrected Conducted Power (dBm)
Bottom	5500	-1.0	1.9	0.9	0.6	1.9	2.5
Middle	5580	0.0	2.1	2.1	1.1	2.1	3.2
Top	5700	1.0	1.9	2.9	3.0	1.9	4.9

Channel	Frequency (MHz)	Port 3			Port 1, Port 2 & Port 3		
		Conducted Power (dBm)	Duty Cycle correction factor (dB)	Corrected Conducted Power (dBm)	Corrected Conducted Power Port 1 (dBm)	Corrected Conducted Power Port 2 (dBm)	Corrected Conducted Power Port 3 (dBm)
Bottom	5500	0.0	1.9	1.9	0.9	2.5	1.9
Middle	5580	-0.1	2.1	2.0	2.1	3.2	2.0
Top	5700	2.7	1.9	4.6	2.9	4.9	4.6

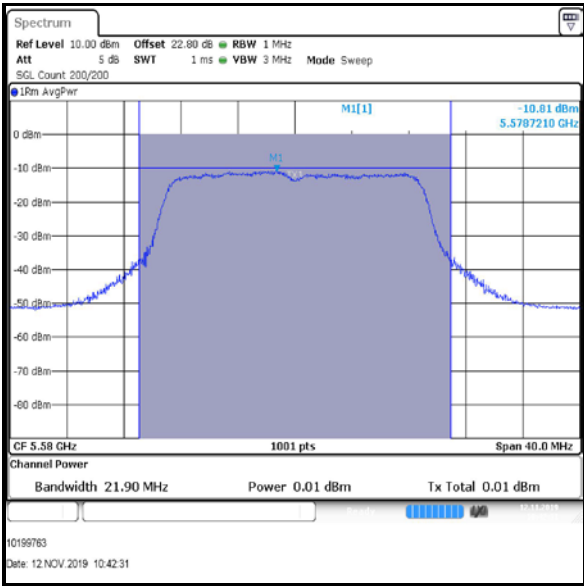
Channel	Frequency (MHz)	Combined Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	5500	6.6	15.8	9.2	Complied
Middle	5580	7.2	15.8	8.6	Complied
Top	5700	9.0	15.8	6.8	Complied

Transmitter Maximum Conducted Output Power (5.47-5.725 GHz band) (continued)

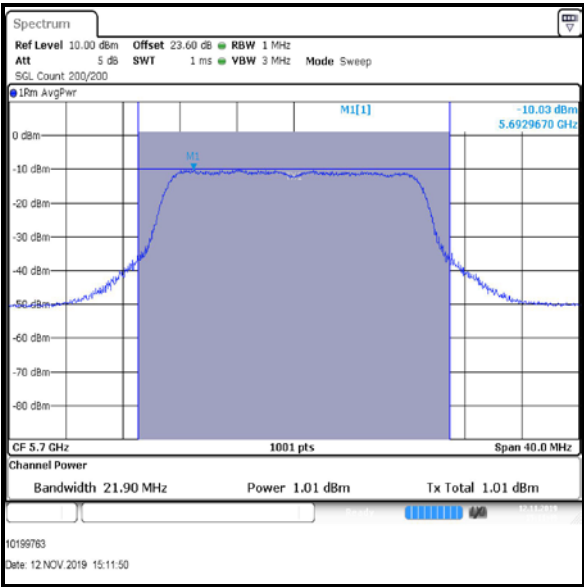
Results: 802.11n / 20 MHz / MIMO / 3Tx CDD / 64-QAM / MCS7 / Port 1 (reference plots)



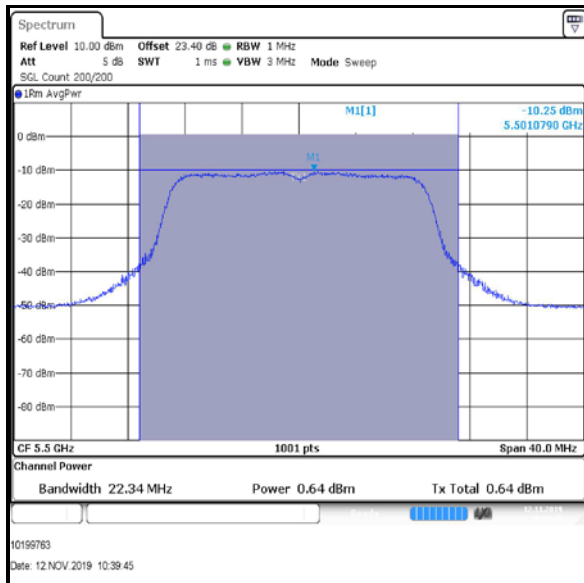
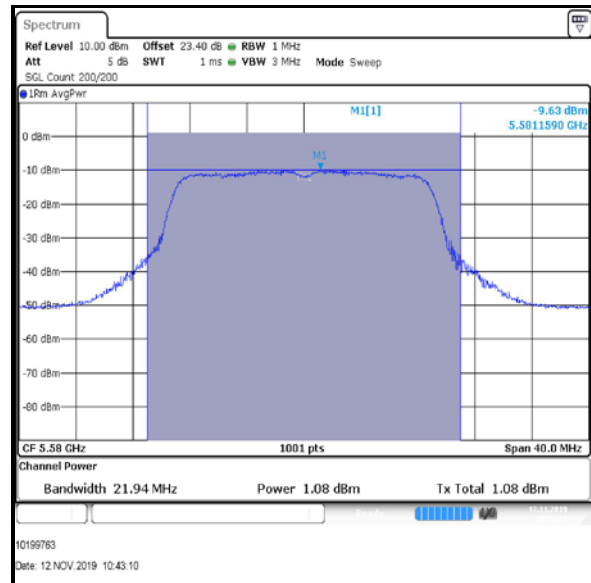
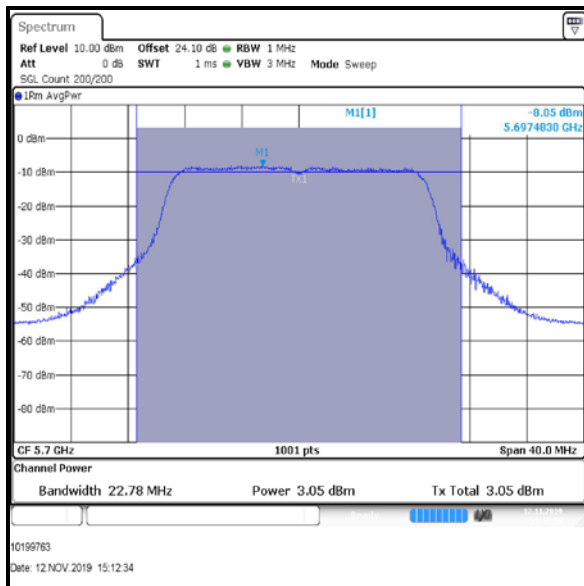
Bottom Channel



Middle Channel

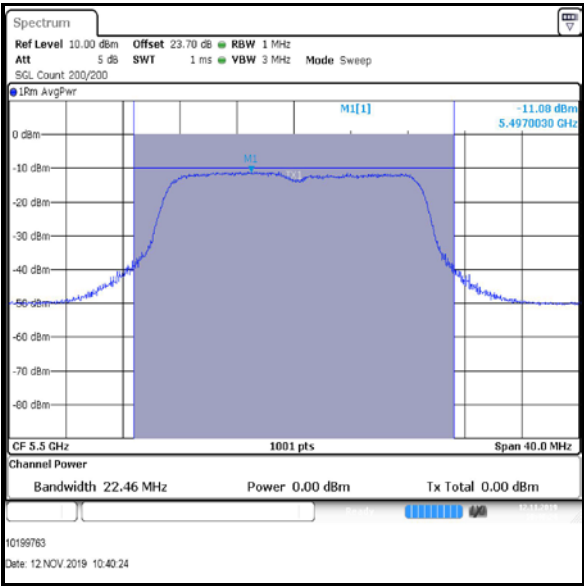


Top Channel

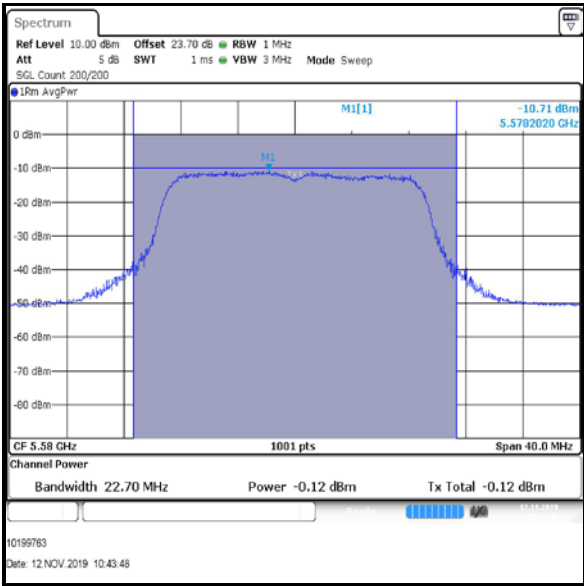
Transmitter Maximum Conducted Output Power (5.47-5.725 GHz band) (continued)**Results: 802.11n / 20 MHz / MIMO / 3Tx CDD / 64-QAM / MCS7 / Port 2 (reference plots)****Bottom Channel****Middle Channel****Top Channel**

Transmitter Maximum Conducted Output Power (5.47-5.725 GHz band) (continued)

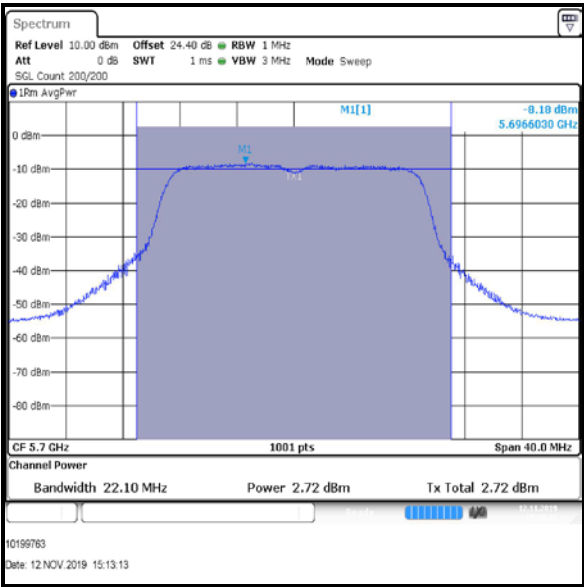
Results: 802.11n / 20 MHz / MIMO / 3Tx CDD / 64-QAM / MCS7 / Port 3 (reference plots)



Bottom Channel



Middle Channel



Top Channel

4.4. Transmitter Maximum Power Spectral Density

4.4.1. 5.25-5.35 GHz band

Test Summary:

Test Engineer:	Max Passell	Test Dates:	12 September 2019 to 14 November 2019
Test Sample Serial Number:	2405067		

FCC Reference:	Part 15.407(a)(2)
Test Method Used:	KDB 789033 D02 Section II.F. referencing II.E.2.d)

Environmental Conditions:

Temperatures (°C):	21 to 24
Relative Humidity (%):	35 to 44

Note(s):

- All configurations supported by the EUT were investigated on one channel. The data rates that produced the highest output power and therefore deemed worst case were:
 - 802.11a SISO – 64-QAM / 48 Mbps / Port 1
 - 802.11n HT20 SISO – 64-QAM / MCS6 / Port 1
 - 802.11n HT40 SISO – 16-QAM / MCS4 / Port 1
 - 802.11ac VHT80 SISO – QPSK / MCS1x1 / Port 1
 - 802.11a MIMO – 64-QAM / 54 Mbps / 2Tx CDD / Ports 1 & 2
 - 802.11n HT20 MIMO – BPSK / MCS0 / 2Tx CDD / Ports 1 & 2
 - 802.11n HT40 MIMO – 64-QAM / MCS7 / 2Tx CDD / Ports 1 & 2
 - 802.11ac VHT80 MIMO – 64-QAM / MCS5x1 / 2Tx CDD / Ports 1 & 2
 - 802.11a MIMO – BPSK / 9 Mbps / 3Tx CDD / Ports 1, 2 & 3
 - 802.11n HT20 MIMO – 16-QAM / MCS3 / 3Tx CDD / Ports 1, 2 & 3
 - 802.11n HT40 MIMO – 64-QAM / MCS5 / 3Tx CDD / Ports 1, 2 & 3
 - 802.11ac VHT80 MIMO – QPSK / MCS1x1 / 3Tx CDD / Ports 1, 2 & 3
 - 802.11a MIMO – QPSK / 12 Mbps / 4Tx CDD / Ports 1, 2, 3 & 4
 - 802.11n HT20 MIMO – QPSK / MCS1 / 4Tx CDD / Ports 1, 2, 3 & 4
 - 802.11n HT40 MIMO – 16-QAM / MCS3 / 4Tx CDD / Ports 1, 2, 3 & 4
 - 802.11ac VHT80 MIMO – 16-QAM / MCS3x1 / 4Tx CDD / Ports 1, 2, 3 & 4
- Transmitter Maximum Power Spectral Density tests in all bands were performed using a signal analyser in accordance with KDB 789033 II. F referencing II.E.2.d) Method SA-2.
- As the power spectral density test uses the same test method as the output power test, before the power is integrated across the 26 dB bandwidth, the conducted power spectral density plots are located in the conducted output power section 4.3 of this test report. The peak spectral density was measured by placing a marker on the peak of the signal and the results entered in the tables below.
- The calculated duty cycle in Section 4.1 was added to the measured maximum power spectral density in order to compute the average maximum power spectral density during the actual transmission time.

Transmitter Maximum Power Spectral Density (5.25-5.35 GHz band) (continued)**Note(s) continued:**

5. For 2Tx and 3Tx MIMO modes, PSD was measured on each port and then combined using the *measure and sum spectra across the outputs* technique, stated in FCC KDB 662911 D01 Section E)2)a).
6. For 4Tx MIMO modes, PSD was measured on each port and then combined using the *measure and sum spectral maxima across the outputs* technique, stated in FCC KDB 662911 D01 Section E)2)b).
7. For SISO modes of operation presented in this section of the test report, the EUT has an antenna gain of 14.2 dBi. In accordance with 15.407(a)(2), the limit has been reduced by the amount in dB the antenna gain exceeds 6 dBi. Therefore the limit of 11 dBm/MHz has been reduced by 8.2 to 2.8 dBm/MHz.
8. For 2Tx MIMO modes of operation presented in this section of the test report, the EUT has a directional antenna gain of 17.2 dBi. In accordance with Part 15.407(a)(2), the limit was reduced by the amount in dB the antenna gain exceeds 6 dBi. Therefore the limit of 11.0 dBm has been reduced by 11.2 dB to -0.2 dBm.
9. For 3Tx MIMO modes of operation presented in this section of the test report, the EUT has a directional antenna gain of 19.0 dBi. In accordance with Part 15.407(a)(2), the limit was reduced by the amount in dB the antenna gain exceeds 6 dBi. Therefore the limit of 11.0 dBm has been reduced by 13.0 dB to -2.0 dBm.
10. For 4Tx MIMO modes of operation presented in this section of the test report, the EUT has a directional antenna gain of 20.2 dBi. In accordance with Part 15.407(a)(2), the limit was reduced by the amount in dB the antenna gain exceeds 6 dBi. Therefore the limit of 11.0 dBm has been reduced by 14.2 dB to -3.2 dBm.
11. For details on antenna gains refer to Section 3.4 of this test report.
12. The signal analyser was connected to the RF port on the EUT using an RF switch, suitable attenuation and RF cable. An RF level offset was entered on the signal analyser to compensate for the loss of the attenuator and RF cable.

Transmitter Maximum Power Spectral Density (5.25-5.35 GHz band) (continued)**Results: 802.11a / 20 MHz / SISO / 64-QAM / 48 Mbps / Port 1**

Channel	Frequency (MHz)	PSD (dBm /MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm /MHz)	Limit (dBm /MHz)	Margin (dB)	Result
Bottom	5260	-1.7	1.6	-0.1	2.8	2.9	Complied
Middle	5280	-1.9	1.3	-0.6	2.8	3.4	Complied
Top	5320	-9.4	1.5	-7.9	2.8	10.7	Complied

Results: 802.11n / 20 MHz / SISO / 64-QAM / MCS6 / Port 1

Channel	Frequency (MHz)	PSD (dBm /MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm /MHz)	Limit (dBm /MHz)	Margin (dB)	Result
Bottom	5260	-2.3	1.7	-0.6	2.8	3.4	Complied
Middle	5280	-2.1	1.4	-0.7	2.8	3.5	Complied
Top	5320	-9.5	1.8	-7.7	2.8	10.5	Complied

Results: 802.11n / 40 MHz / SISO / 16-QAM / MCS4 / Port 1

Channel	Frequency (MHz)	PSD (dBm /MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm /MHz)	Limit (dBm /MHz)	Margin (dB)	Result
Bottom	5270	-11.0	2.2	-8.8	2.8	11.6	Complied
Top	5310	-12.1	2.2	-9.9	2.8	12.7	Complied

Results: 802.11ac / 80 MHz / SISO / QPSK / MCS1x1 / Port 1

Channel	Frequency (MHz)	PSD (dBm /MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm /MHz)	Limit (dBm /MHz)	Margin (dB)	Result
Single	5290	-13.8	1.5	-12.3	2.8	15.1	Complied

Transmitter Maximum Power Spectral Density (5.25-5.35 GHz band) (continued)**Results: 802.11a / 20 MHz / MIMO / 2Tx CDD / 64-QAM / 54 Mbps**

Channel	Frequency (MHz)	Port 1			Port 2		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5260	-6.7	1.4	-5.3	-4.8	1.4	-3.4
Middle	5280	-6.3	1.8	-4.5	-4.7	1.8	-2.9
Top	5320	-12.9	1.4	-11.5	-10.8	1.4	-9.4

Channel	Frequency (MHz)	Corrected PSD Port 1 (dBm/MHz)	Corrected PSD Port 2 (dBm/MHz)	Combined PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Bottom	5260	-5.3	-3.4	-1.3	-0.2	1.1	Complied
Middle	5280	-4.5	-2.9	-1.0	-0.2	0.8	Complied
Top	5320	-11.5	-9.4	-7.5	-0.2	7.3	Complied

Results: 802.11n / 20 MHz / MIMO / 2Tx CDD / BPSK / MCS0

Channel	Frequency (MHz)	Port 1			Port 2		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5260	-6.6	1.5	-5.1	-5.0	1.5	-3.5
Middle	5280	-6.0	1.6	-4.4	-4.6	1.6	-3.0
Top	5320	-11.8	1.8	-10.0	-10.3	1.8	-8.5

Channel	Frequency (MHz)	Corrected PSD Port 1 (dBm/MHz)	Corrected PSD Port 2 (dBm/MHz)	Combined PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Bottom	5260	-5.1	-3.5	-1.4	-0.2	1.2	Complied
Middle	5280	-4.4	-3.0	-0.8	-0.2	0.6	Complied
Top	5320	-10.0	-8.5	-6.3	-0.2	6.1	Complied

Transmitter Maximum Power Spectral Density (5.25-5.35 GHz band) (continued)**Results: 802.11n / 40 MHz / MIMO / 2Tx CDD / 64-QAM / MCS7**

Channel	Frequency (MHz)	Port 1			Port 2		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5270	-14.5	3.3	-11.2	-13.4	3.3	-10.1
Top	5310	-15.3	2.1	-13.2	-13.5	2.1	-11.4

Channel	Frequency (MHz)	Corrected PSD Port 1 (dBm/MHz)	Corrected PSD Port 2 (dBm/MHz)	Combined PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Bottom	5270	0.0	9.1	-7.8	-0.2	7.6	Complied
Top	5310	!C4 Is Not In Table	!F4 Is Not In Table	-9.5	-0.2	9.3	Complied

Results: 802.11ac / 80 MHz / MIMO / 2Tx CDD / 64QAM / MCS5x1

Channel	Frequency (MHz)	Port 1			Port 2		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Single	5290	-19.0	3.6	-15.4	-17.1	3.6	-13.5

Channel	Frequency (MHz)	Corrected PSD Port 1 (dBm/MHz)	Corrected PSD Port 2 (dBm/MHz)	Combined PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Single	5290	-15.4	-13.5	-11.8	-0.2	11.6	Complied

Transmitter Maximum Power Spectral Density (5.25-5.35 GHz band) (continued)**Results: 802.11a / 20 MHz / MIMO / 3Tx CDD / BPSK / 9 Mbps**

Channel	Frequency (MHz)	Port 1			Port 2		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5260	-9.3	0.6	-8.7	-7.6	0.6	-7.0
Middle	5280	-10.2	0.3	-9.9	-8.6	0.3	-8.3
Top	5320	-10.9	0.7	-10.2	-9.4	0.7	-8.7

Channel	Frequency (MHz)	Port 3			Port 1, Port 2 & Port 3		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	Corrected PSD Port 1 (dBm/MHz)	Corrected PSD Port 2 (dBm/MHz)	Corrected PSD Port 3 (dBm/MHz)
Bottom	5260	-8.0	0.6	-7.4	-8.7	-7.0	-7.4
Middle	5280	-8.6	0.3	-8.3	-9.9	-8.3	-8.3
Top	5320	-9.6	0.7	-8.9	-10.2	-8.7	-8.9

Channel	Frequency (MHz)	Combined PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Bottom	5260	-3.1	-2.0	1.1	Complied
Middle	5280	-4.3	-2.0	2.3	Complied
Top	5320	-4.8	-2.0	2.8	Complied

Transmitter Maximum Power Spectral Density (5.25-5.35 GHz band) (continued)**Results: 802.11n / 20 MHz / MIMO / 3Tx CDD / 16-QAM / MCS3**

Channel	Frequency (MHz)	Port 1			Port 2		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5260	-9.3	1.1	-8.2	-7.8	1.1	-6.7
Middle	5280	-9.6	1.3	-8.3	-8.0	1.3	-6.7
Top	5320	-12.0	1.3	-10.7	-10.7	1.3	-9.4

Channel	Frequency (MHz)	Port 3			Port 1, Port 2 & Port 3		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm /MHz)	Corrected PSD Port 1 (dBm /MHz)	Corrected PSD Port 2 (dBm /MHz)	Corrected PSD Port 3 (dBm /MHz)
Bottom	5260	-8.2	1.1	-7.1	-8.2	-6.7	-7.1
Middle	5280	-8.7	1.3	-7.4	-8.3	-6.7	-7.4
Top	5320	-11.1	1.3	-9.8	-10.7	-9.4	-9.8

Channel	Frequency (MHz)	Combined PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Bottom	5260	-2.8	-2.0	0.8	Complied
Middle	5280	-2.9	-2.0	0.9	Complied
Top	5320	-5.4	-2.0	3.4	Complied

Transmitter Maximum Power Spectral Density (5.25-5.35 GHz band) (continued)**Results: 802.11n / 40 MHz / MIMO / 3Tx CDD / 64-QAM / MCS5**

Channel	Frequency (MHz)	Port 1			Port 2		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5270	-15.4	1.8	-13.6	-14.1	1.8	-12.3
Top	5310	-16.4	2.0	-14.4	-14.8	2.0	-12.8

Channel	Frequency (MHz)	Port 3			Port 1, Port 2 & Port 3		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm /MHz)	Corrected PSD Port 1 (dBm /MHz)	Corrected PSD Port 2 (dBm /MHz)	Corrected PSD Port 3 (dBm /MHz)
Bottom	5270	-14.6	1.8	-12.8	-13.6	-12.3	-12.8
Top	5310	-15.3	2.0	-13.3	-14.4	-12.8	-13.3

Channel	Frequency (MHz)	Combined PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Bottom	5270	-8.4	-2.0	6.4	Complied
Top	5310	-9.0	-2.0	7.0	Complied

Transmitter Maximum Power Spectral Density (5.25-5.35 GHz band) (continued)**Results: 802.11ac / 80 MHz / MIMO / 3Tx CDD / QPSK / MCS1x1**

Channel	Frequency (MHz)	Port 1			Port 2		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Single	5290	-19.2	2.3	-16.9	-16.8	2.3	-14.5

Channel	Frequency (MHz)	Port 3			Port 1, Port 2 & Port 3		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	Corrected PSD Port 1 (dBm/MHz)	Corrected PSD Port 2 (dBm/MHz)	Corrected PSD Port 3 (dBm/MHz)
Single	5290	-17.3	2.3	-15.0	-16.9	-14.5	-15.0

Channel	Frequency (MHz)	Combined PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Single	5290	-11.3	-2.0	9.3	Complied

Transmitter Maximum Power Spectral Density (5.25-5.35 GHz band) (continued)**Results: 802.11a / 20 MHz / MIMO / 4Tx CDD / QPSK / 12 Mbps**

Channel	Frequency (MHz)	Port 1			Port 2		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5260	-11.8	0.6	-11.2	-10.4	0.6	-9.8
Middle	5280	-11.9	0.4	-11.5	-10.0	0.4	-9.6
Top	5320	-12.4	0.4	-12.0	-10.6	0.4	-10.2

Channel	Frequency (MHz)	Port 3			Port 4		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5260	-10.8	0.6	-10.2	-9.9	0.6	-9.3
Middle	5280	-10.9	0.4	-10.5	-10.3	0.4	-9.9
Top	5320	-11.1	0.4	-10.7	-10.6	0.4	-10.2

Channel	Frequency (MHz)	Combined PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Bottom	5260	-4.0	-3.2	0.8	Complied
Middle	5280	-4.3	-3.2	1.1	Complied
Top	5320	-4.7	-3.2	1.5	Complied

Transmitter Maximum Power Spectral Density (5.25-5.35 GHz band) (continued)**Results: 802.11n / 20 MHz / MIMO / 4Tx CDD / QPSK / MCS1**

Channel	Frequency (MHz)	Port 1			Port 2		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5260	-11.4	0.5	-10.9	-9.6	0.5	-9.1
Middle	5280	-11.7	0.6	-11.1	-9.6	0.6	-9.0
Top	5320	-11.8	0.6	-11.2	-10.0	0.6	-9.4

Channel	Frequency (MHz)	Port 3			Port 4		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5260	-10.1	0.5	-9.6	-9.8	0.5	-9.3
Middle	5280	-10.2	0.6	-9.6	-10.1	0.6	-9.5
Top	5320	-10.3	0.6	-9.7	-10.2	0.6	-9.6

Channel	Frequency (MHz)	Combined PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Bottom	5260	-3.7	-3.2	0.5	Complied
Middle	5280	-3.7	-3.2	0.5	Complied
Top	5320	-3.9	-3.2	0.7	Complied

Transmitter Maximum Power Spectral Density (5.25-5.35 GHz band) (continued)**Results: 802.11n / 40 MHz / MIMO / 4Tx CDD / 16QAM / MCS3**

Channel	Frequency (MHz)	Port 1			Port 2		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5270	-14.9	1.7	-13.2	-13.4	1.7	-11.7
Top	5310	-16.9	1.8	-15.1	-14.3	1.8	-12.5

Channel	Frequency (MHz)	Port 3			Port 4		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5270	-13.6	1.7	-11.9	-14.0	1.7	-12.3
Top	5310	-15.9	1.8	-14.1	-14.9	1.8	-13.1

Channel	Frequency (MHz)	Combined PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Bottom	5270	-6.2	-3.2	3.0	Complied
Top	5310	-7.6	-3.2	4.4	Complied

Transmitter Maximum Power Spectral Density (5.25-5.35 GHz band) (continued)**Results: 802.11ac / 80 MHz / MIMO / 4Tx CDD / 16QAM / MCS3x1**

Channel	Frequency (MHz)	Port 1			Port 2		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Single	5290	-20.9	3.0	-17.9	-19.1	3.0	-16.1

Channel	Frequency (MHz)	Port 3			Port 4		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Single	5290	-19.5	3.0	-16.5	-20.2	3.0	-17.2

Channel	Frequency (MHz)	Combined PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Single	5290	-10.9	-3.2	7.7	Complied

Transmitter Maximum Power Spectral Density (5.47-5.725 GHz band)**4.4.2. 5.47-5.725 GHz band****Test Summary:**

Test Engineer:	Max Passell	Test Date:	13 August 2019
Test Sample Serial Number:	2405067		

FCC Reference:	Part 15.407(a)(2)
Test Method Used:	KDB 789033 D02 Section II.F. referencing II.E.2.d)

Environmental Conditions:

Temperatures (°C):	21 to 24
Relative Humidity (%):	35 to 44

Note(s):

- All configurations supported by the EUT were investigated on one channel. The data rates that produced the highest output power and therefore deemed worst case were:
 - 802.11a SISO – 64-QAM / 48 Mbps / Port 1
 - 802.11n HT20 SISO – 64-QAM / MCS6 / Port 1
 - 802.11n HT40 SISO – 16-QAM / MCS4 / Port 1
 - 802.11ac VHT80 SISO – QPSK / MCS1x1 / Port 1
 - 802.11a MIMO – 64-QAM / 54 Mbps / 2Tx CDD / Ports 1 & 2
 - 802.11n HT20 MIMO – BPSK / MCS0 / 2Tx CDD / Ports 1 & 2
 - 802.11n HT40 MIMO – 64-QAM / MCS7 / 2Tx CDD / Ports 1 & 2
 - 802.11ac VHT80 MIMO – 64-QAM / MCS5x1 / 2Tx CDD / Ports 1 & 2
 - 802.11a MIMO – BPSK / 9 Mbps / 3Tx CDD / Ports 1, 2 & 3
 - 802.11n HT20 MIMO – 16-QAM / MCS3 / 3Tx CDD / Ports 1, 2 & 3
 - 802.11n HT40 MIMO – 64-QAM / MCS5 / 3Tx CDD / Ports 1, 2 & 3
 - 802.11ac VHT80 MIMO – QPSK / MCS1x1 / 3Tx CDD / Ports 1, 2 & 3
 - 802.11a MIMO – QPSK / 12 Mbps / 4Tx CDD / Ports 1, 2, 3 & 4
 - 802.11n HT20 MIMO – QPSK / MCS1 / 4Tx CDD / Ports 1, 2, 3 & 4
 - 802.11n HT40 MIMO – 16-QAM / MCS3 / 4Tx CDD / Ports 1, 2, 3 & 4
 - 802.11ac VHT80 MIMO – 16-QAM / MCS3x1 / 4Tx CDD / Ports 1, 2, 3 & 4
- Transmitter Maximum Power Spectral Density tests in all bands were performed using a signal analyser in accordance with KDB 789033 II. F referencing II.E.2.d) Method SA-2.
- As the power spectral density test uses the same test method as the output power test, before the power is integrated across the 26 dB bandwidth, the conducted power spectral density plots are located in the conducted output power section 4.3 of this test report. The peak spectral density was measured by placing a marker on the peak of the signal and the results entered in the tables below.
- The calculated duty cycle in Section 4.1 was added to the measured maximum power spectral density in order to compute the average maximum power spectral density during the actual transmission time.

Transmitter Maximum Power Spectral Density (5.47-5.725 GHz band) (continued)**Note(s) continued:**

13. For 2Tx and 3Tx MIMO modes, PSD was measured on each port and then combined using the *measure and sum spectra across the outputs* technique, stated in FCC KDB 662911 D01 Section E)2)a).
14. For 4Tx MIMO modes, PSD was measured on each port and then combined using the *measure and sum spectral maxima across the outputs* technique, stated in FCC KDB 662911 D01 Section E)2)b).
15. For SISO modes of operation presented in this section of the test report, the EUT has an antenna gain of 14.2 dBi. In accordance with 15.407(a)(2), the limit has been reduced by the amount in dB the antenna gain exceeds 6 dBi. Therefore the limit of 11 dBm/MHz has been reduced by 8.2 to 2.8 dBm/MHz.
16. For 2Tx MIMO modes of operation presented in this section of the test report, the EUT has a directional antenna gain of 17.2 dBi. In accordance with Part 15.407(a)(2), the limit was reduced by the amount in dB the antenna gain exceeds 6 dBi. Therefore the limit of 11.0 dBm has been reduced by 11.2 dB to -0.2 dBm.
17. For 3Tx MIMO modes of operation presented in this section of the test report, the EUT has a directional antenna gain of 19.0 dBi. In accordance with Part 15.407(a)(2), the limit was reduced by the amount in dB the antenna gain exceeds 6 dBi. Therefore the limit of 11.0 dBm has been reduced by 13.0 dB to -2.0 dBm.
18. For 4Tx MIMO modes of operation presented in this section of the test report, the EUT has a directional antenna gain of 20.2 dBi. In accordance with Part 15.407(a)(2), the limit was reduced by the amount in dB the antenna gain exceeds 6 dBi. Therefore the limit of 11.0 dBm has been reduced by 14.2 dB to -3.2 dBm.
19. For details on antenna gains refer to Section 3.4 of this test report.
20. The signal analyser was connected to the RF port on the EUT using an RF switch, suitable attenuation and RF cable. An RF level offset was entered on the signal analyser to compensate for the loss of the attenuator and RF cable.

Transmitter Maximum Power Spectral Density (5.47-5.725 GHz band) (continued)**Results: 802.11a / 20 MHz / SISO / 64-QAM / 48 Mbps / Port 1**

Channel	Frequency (MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Bottom	5500	-8.9	1.5	-7.4	2.8	10.2	Complied
Middle	5580	-2.3	1.8	-0.5	2.8	3.3	Complied
Top	5700	-1.5	1.6	0.1	2.8	2.7	Complied

Results: 802.11n / 20 MHz / SISO / 64-QAM / MCS6 / Port 1

Channel	Frequency (MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Bottom	5500	-8.8	1.5	-7.3	2.8	10.1	Complied
Middle	5580	-1.8	1.6	-0.2	2.8	3.0	Complied
Top	5700	-1.9	1.5	-0.4	2.8	3.2	Complied

Results: 802.11n / 40 MHz / SISO / 16-QAM / MCS4 / Port 1

Channel	Frequency (MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Bottom	5510	-11.4	2.2	-9.2	2.8	12.0	Complied
Middle	5550	-11.1	2.1	-9.0	2.8	11.8	Complied
Top	5670	-11.3	1.9	-9.4	2.8	12.2	Complied

Results: 802.11ac / 80 MHz / SISO / QPSK / MCS1x1 / Port 1

Channel	Frequency (MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Bottom	5530	-13.5	1.4	-12.1	2.8	14.9	Complied
Top	5610	-13.2	1.5	-11.7	2.8	14.5	Complied

Transmitter Maximum Power Spectral Density (5.47-5.725 GHz band) (continued)**Results: 802.11a / 20 MHz / MIMO / 2Tx CDD / 64 QAM / 54 Mbps**

Channel	Frequency (MHz)	Port 1			Port 2		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5500	-11.2	1.7	-9.5	-9.9	1.7	-8.2
Middle	5580	-5.7	1.7	-4.0	-5.0	1.7	-3.3
Top	5700	-6.2	1.6	-4.6	-5.0	1.6	-3.4

Channel	Frequency (MHz)	Corrected PSD Port 1 (dBm/MHz)	Corrected PSD Port 2 (dBm/MHz)	Combined PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Bottom	5500	-9.5	-8.2	-6.1	-0.2	5.9	Complied
Middle	5580	-4.0	-3.3	-0.8	-0.2	0.6	Complied
Top	5700	-4.6	-3.4	-1.1	-0.2	0.9	Complied

Results: 802.11n / 20 MHz / MIMO / 2Tx CDD / BPSK / MCS0

Channel	Frequency (MHz)	Port 1			Port 2		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5500	-12.0	1.7	-10.3	-10.2	1.7	-8.5
Middle	5580	-5.3	1.4	-3.9	-4.1	1.4	-2.7
Top	5700	-5.5	1.5	-4.0	-4.1	1.5	-2.6

Channel	Frequency (MHz)	Corrected PSD Port 1 (dBm/MHz)	Corrected PSD Port 2 (dBm/MHz)	Combined PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Bottom	5500	-10.3	-8.5	-6.4	-0.2	6.2	Complied
Middle	5580	-3.9	-2.7	-0.4	-0.2	0.2	Complied
Top	5700	-4.0	-2.6	-0.5	-0.2	0.3	Complied

Transmitter Maximum Power Spectral Density (5.47-5.725 GHz band) (continued)**Results: 802.11n / 40 MHz / MIMO / 2Tx CDD / 64-QAM / MCS7**

Channel	Frequency (MHz)	Port 1			Port 2		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5510	-14.1	2.2	-11.9	-14.8	2.2	-12.6
Middle	5550	-14.0	2.0	-12.0	-13.1	2.0	-11.1
Top	5670	-15.1	2.1	-13.0	-13.1	2.1	-11.0

Channel	Frequency (MHz)	Corrected PSD Port 1 (dBm/MHz)	Corrected PSD Port 2 (dBm/MHz)	Combined PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Bottom	5510	-11.9	-12.6	-9.9	-0.2	9.7	Complied
Middle	5550	-12.0	-11.1	-9.1	-0.2	8.9	Complied
Top	5670	-13.0	-11.0	-9.0	-0.2	8.8	Complied

Results: 802.11ac / 80 MHz / MIMO / 2Tx CDD / 64-QAM / MCS5x1

Channel	Frequency (MHz)	Port 1			Port 2		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5530	-18.0	3.4	-14.6	-17.2	3.4	-13.8
Top	5610	-18.0	3.2	-14.8	-16.6	3.2	-13.4

Channel	Frequency (MHz)	Corrected PSD Port 1 (dBm/MHz)	Corrected PSD Port 2 (dBm/MHz)	Combined PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Bottom	5530	-14.6	-13.8	-12.1	-0.2	11.9	Complied
Top	5610	-14.8	-13.4	-11.5	-0.2	11.3	Complied

Transmitter Maximum Power Spectral Density (5.47-5.725 GHz band) (continued)**Results: 802.11a / 20 MHz / MIMO / 3Tx CDD / BPSK / 9 Mbps**

Channel	Frequency (MHz)	Port 1			Port 2		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5500	-10.3	0.4	-9.9	-8.5	0.4	-8.1
Middle	5580	-8.8	0.3	-8.5	-8.0	0.3	-7.7
Top	5700	-8.9	0.5	-8.4	-7.2	0.5	-6.7

Channel	Frequency (MHz)	Port 3			Port 1, Port 2 & Port 3		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm /MHz)	Corrected PSD Port 1 (dBm /MHz)	Corrected PSD Port 2 (dBm /MHz)	Corrected PSD Port 3 (dBm /MHz)
Bottom	5500	-9.2	0.4	-8.8	-9.9	-8.1	-8.8
Middle	5580	-7.8	0.3	-7.5	-8.5	-7.7	-7.5
Top	5700	-7.1	0.5	-6.6	-8.4	-6.7	-6.6

Channel	Frequency (MHz)	Combined PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Bottom	5500	-4.3	-2.0	2.3	Complied
Middle	5580	-3.3	-2.0	1.3	Complied
Top	5700	-2.6	-2.0	0.6	Complied

Transmitter Maximum Power Spectral Density (5.47-5.725 GHz band) (continued)**Results: 802.11n / 20 MHz / MIMO / 3Tx CDD / 16-QAM / MCS3**

Channel	Frequency (MHz)	Port 1			Port 2		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5500	-11.3	0.8	-10.5	-9.5	0.8	-8.7
Middle	5580	-9.6	1.1	-8.5	-8.4	1.1	-7.3
Top	5700	-9.0	0.8	-8.2	-7.0	0.8	-6.2

Channel	Frequency (MHz)	Port 3			Port 1, Port 2 & Port 3		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm /MHz)	Corrected PSD Port 1 (dBm /MHz)	Corrected PSD Port 2 (dBm /MHz)	Corrected PSD Port 3 (dBm /MHz)
Bottom	5500	-10.2	0.8	-9.4	-10.5	-8.7	-9.4
Middle	5580	-8.4	1.1	-7.3	-8.5	-7.3	-7.3
Top	5700	-7.2	0.8	-6.4	-8.2	-6.2	-6.4

Channel	Frequency (MHz)	Combined PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Bottom	5500	-2.8	-2.0	0.8	Complied
Middle	5580	-2.9	-2.0	0.9	Complied
Top	5700	-2.4	-2.0	0.4	Complied

Transmitter Maximum Power Spectral Density (5.47-5.725 GHz band) (continued)**Results: 802.11n / 40 MHz / MIMO / 3Tx CDD / 64-QAM / MCS5**

Channel	Frequency (MHz)	Port 1			Port 2		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5510	-16.4	2.0	-14.4	-14.8	2.0	-12.8
Middle	5550	-15.5	2.6	-12.9	-15.0	2.6	-12.4
Top	5670	-15.0	2.0	-13.0	-14.1	2.0	-12.1

Channel	Frequency (MHz)	Port 3			Port 1, Port 2 & Port 3		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm /MHz)	Corrected PSD Port 1 (dBm /MHz)	Corrected PSD Port 2 (dBm /MHz)	Corrected PSD Port 3 (dBm /MHz)
Bottom	5510	-14.6	2.0	-12.6	-14.4	-12.8	-12.6
Middle	5550	-14.2	2.6	-11.6	-12.9	-12.4	-11.6
Top	5670	-13.3	2.0	-11.3	-13.0	-12.1	-11.3

Channel	Frequency (MHz)	Combined PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Bottom	5510	-8.6	-2.0	6.6	Complied
Middle	5550	-7.7	-2.0	5.7	Complied
Top	5670	-7.6	-2.0	5.6	Complied

Transmitter Maximum Power Spectral Density (5.47-5.725 GHz band) (continued)**Results: 802.11ac / 80 MHz / MIMO / 3Tx CDD / QPSK / MCS1x1**

Channel	Frequency (MHz)	Port 1			Port 2		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5530	-17.6	2.3	-15.3	-16.7	2.3	-14.4
Top	5610	-17.3	2.6	-14.7	-16.5	2.6	-13.9

Channel	Frequency (MHz)	Port 3			Port 1, Port 2 & Port 3		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm /MHz)	Corrected PSD Port 1 (dBm /MHz)	Corrected PSD Port 2 (dBm /MHz)	Corrected PSD Port 3 (dBm /MHz)
Bottom	5530	-16.7	2.3	-14.4	-15.3	-14.4	-14.4
Top	5610	-16.8	2.6	-14.2	-14.7	-13.9	-14.2

Channel	Frequency (MHz)	Combined PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Bottom	5530	-10.9	-2.0	8.9	Complied
Top	5610	-10.3	-2.0	8.3	Complied

Transmitter Maximum Power Spectral Density (5.47-5.725 GHz band) (continued)**Results: 802.11a / 20 MHz / MIMO / 4Tx CDD / QPSK / 12 Mbps**

Channel	Frequency (MHz)	Port 1			Port 2		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5500	-10.5	0.7	-9.8	-9.4	0.7	-8.7
Middle	5580	-11.5	0.5	-11.0	-10.6	0.5	-10.1
Top	5700	-11.8	0.5	-11.3	-9.8	0.5	-9.3

Channel	Frequency (MHz)	Port 3			Port 4		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5500	-10.2	0.7	-9.5	-10.1	0.7	-9.4
Middle	5580	-10.2	0.5	-9.7	-10.4	0.5	-9.9
Top	5700	-9.6	0.5	-9.1	-10.3	0.5	-9.8

Channel	Frequency (MHz)	Combined PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Bottom	5500	-3.3	-3.2	0.1	Complied
Middle	5580	-4.1	-3.2	0.9	Complied
Top	5700	-3.8	-3.2	0.6	Complied

Transmitter Maximum Power Spectral Density (5.47-5.725 GHz band) (continued)**Results: 802.11n / 20 MHz / MIMO / 4Tx CDD / QPSK / MCS1**

Channel	Frequency (MHz)	Port 1			Port 2		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5500	-11.6	0.5	-11.1	-9.4	0.5	-8.9
Middle	5580	-11.2	0.5	-10.7	-9.9	0.5	-9.4
Top	5700	-11.8	0.5	-11.3	-9.8	0.5	-9.3

Channel	Frequency (MHz)	Port 3			Port 4		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5500	-9.8	0.5	-9.3	-10.1	0.5	-9.6
Middle	5580	-9.6	0.5	-9.1	-9.9	0.5	-9.4
Top	5700	-9.7	0.5	-9.2	-10.1	0.5	-9.6

Channel	Frequency (MHz)	Combined PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Bottom	5500	-3.6	-3.2	0.4	Complied
Middle	5580	-3.6	-3.2	0.4	Complied
Top	5700	-3.8	-3.2	0.6	Complied

Transmitter Maximum Power Spectral Density (5.47-5.725 GHz band) (continued)**Results: 802.11n / 40 MHz / MIMO / 4Tx CDD / 16-QAM / MCS3**

Channel	Frequency (MHz)	Port 1			Port 2		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5510	-15.9	1.7	-14.2	-14.4	1.7	-12.7
Middle	5550	-15.2	1.7	-13.5	-14.6	1.7	-12.9
Top	5670	-14.2	1.4	-12.8	-13.8	1.4	-12.4

Channel	Frequency (MHz)	Port 3			Port 4		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5510	-14.2	1.7	-12.5	-14.5	1.7	-12.8
Middle	5550	-14.8	1.7	-13.1	-14.8	1.7	-13.1
Top	5670	-15.5	1.4	-14.1	-15.4	1.4	-14.0

Channel	Frequency (MHz)	Combined PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Bottom	5510	-7.0	-3.2	3.8	Complied
Middle	5550	-7.1	-3.2	3.9	Complied
Top	5670	-7.2	-3.2	4.0	Complied

Transmitter Maximum Power Spectral Density (5.47-5.725 GHz band) (continued)**Results: 802.11ac / 80 MHz / MIMO / 4Tx CDD / 16-QAM / MCS3x1**

Channel	Frequency (MHz)	Port 1			Port 2		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5530	-20.5	3.0	-17.5	-19.3	3.0	-16.3
Top	5610	-19.0	3.0	-16.0	-18.7	3.0	-15.7

Channel	Frequency (MHz)	Port 3			Port 4		
		PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)	PSD (dBm/MHz)	Duty cycle correction factor (dB)	Corrected PSD (dBm/MHz)
Bottom	5530	-18.4	3.0	-15.4	-19.8	3.0	-16.8
Top	5610	-18.6	3.0	-15.6	-18.9	3.0	-15.9

Channel	Frequency (MHz)	Combined PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)	Result
Bottom	5530	-10.4	-3.2	7.2	Complied
Top	5610	-9.8	-3.2	6.6	Complied

4.5. Transmitter Out of Band Conducted Emissions <1 GHz**Test Summary:**

Test Engineers:	Matthew Botfield & Chanthu Thevarajah	Test Dates:	01 October 2019 to 04 October 2019
Test Sample Serial Number:	2428534		

FCC Reference:	Parts 15.407(b)(2),(6),(7) & 15.209(a)
Test Method Used:	KDB 789033 II.G. & ANSI C63.10 Sections 6.3, 6.4 and 6.5
Frequency Range:	9 kHz to 1000 MHz

Environmental Conditions:

Temperature (°C):	22 to 23
Relative Humidity (%):	40 to 62

Note(s):

1. The final measured value, for the given emission in the field strength result tables, incorporates the calibrated antenna factor and cable loss.
2. Pre-scans were performed with the EUT transmitting in the band 5.47 to 5.725 GHz band with a data rate of 802.11n / 20 MHz / MIMO / 2Tx CDD / MCS0 on middle channel in this band as it produced the highest EIRP power spectral density and was therefore deemed worst case. An inquiry was made to the FCC and the response was pre-scans could be performed in the band with the highest power spectral density and all final measurements should be performed on any emissions seen in each band.
3. All emissions shown on the pre-scan plots were investigated and found to be ambient, or >20 dB below the applicable limit or below the measurement system noise floor. Therefore the highest peak noise floor reading of the measuring receiver was recorded in the table below.
4. *In accordance with KDB 789033 Section II.G.1.c) if the peak measurement is below the average limit, it is not necessary to perform a separate average measurement.
5. The signal analyser reference level offset includes the 14.2 dBi antenna gain.

Transmitter Out of Band Conducted Emissions (continued)**Results: 802.11n / 20 MHz / MIMO / 2Tx CDD / BPSK / MCS0****Results: Peak Detector / Middle Channel / Port 1**

Frequency (MHz)	Analyzer Peak Level (dBm)	Ground Reflection Factor (dB)	MIMO Correction Factor (dB)	Directional Gain (dB)	Corrected Peak Level (dBm)
881.66	-52.0	4.7	3.0	3.0	-41.3

Frequency (MHz)	Corrected Peak Level (dBm)	EIRP(dBm) to EIRP (dBμV/m) Factor	Converted Peak Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
881.66	-41.3	95.2	53.9	54.0*	0.1	Complied

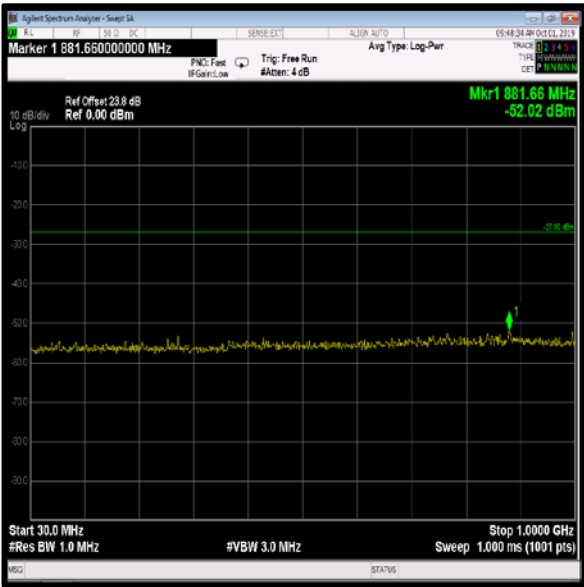
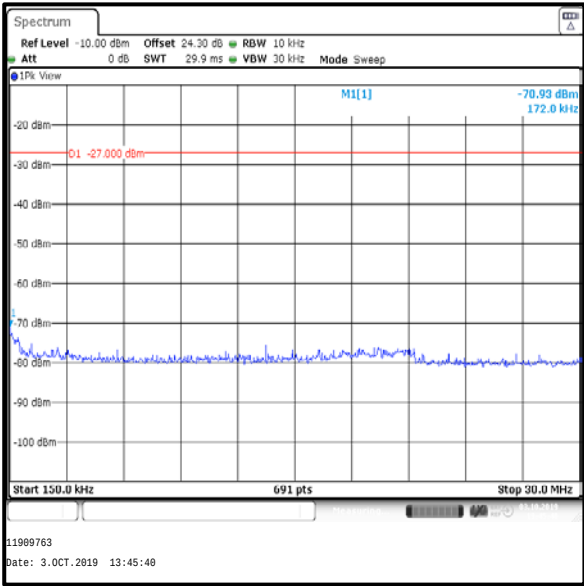
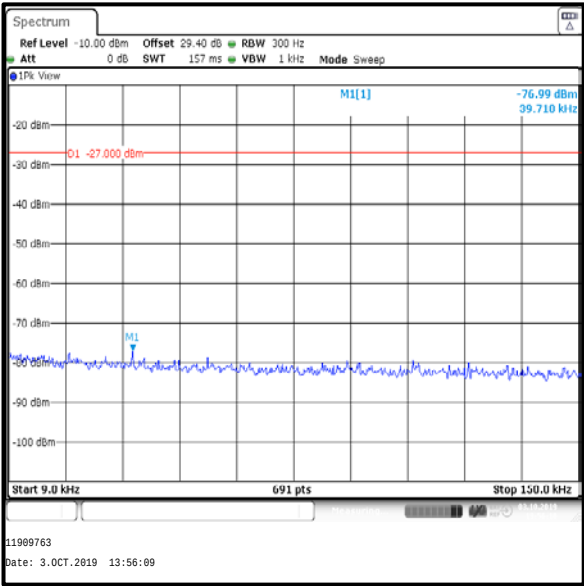
Results: Peak Detector / Middle Channel / Port 2

Frequency (MHz)	Analyzer Peak Level (dBm)	Ground Reflection Factor (dB)	MIMO Correction Factor (dB)	Directional Gain (dB)	Corrected Peak Level (dBm)
881.66	-52.3	4.7	3.0	3.0	-41.6

Frequency (MHz)	Corrected Peak Level (dBm)	EIRP(dBm) to EIRP (dBμV/m) Factor	Converted Peak Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
881.66	-41.6	95.2	53.6	54.0*	0.4	Complied

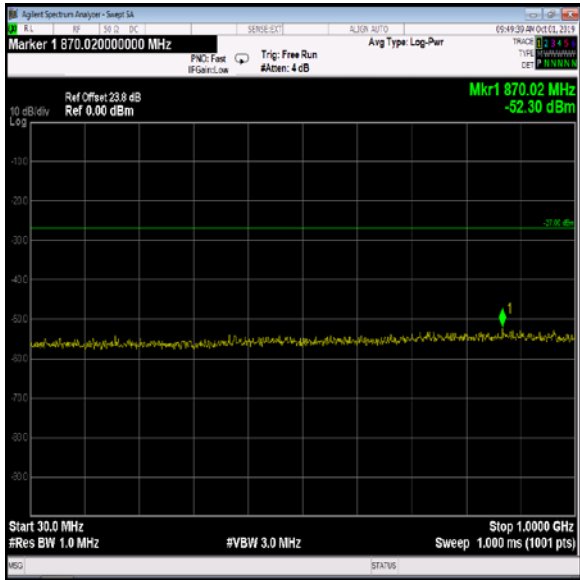
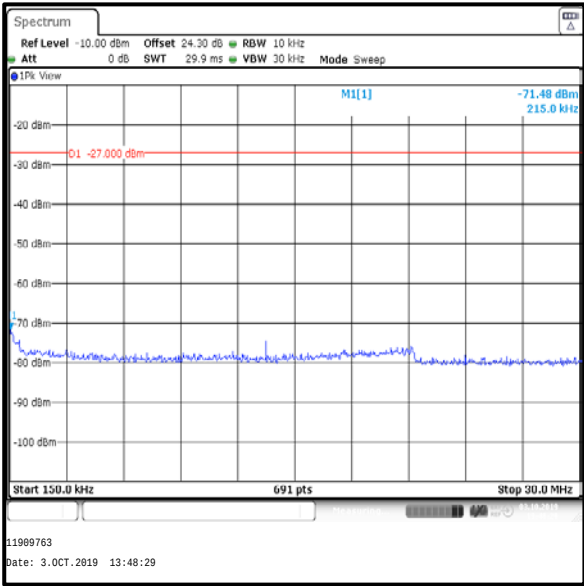
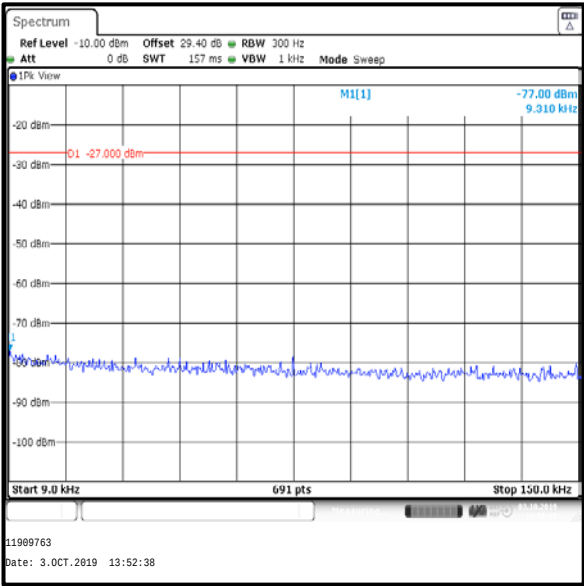
Transmitter Out of Band Conducted Emissions (continued)

Results: 802.11n / 20 MHz / MIMO / 2Tx CDD / BPSK / MCS0 / Port 1



Transmitter Out of Band Conducted Emissions (continued)

Results: 802.11n / 20 MHz / MIMO / 2Tx CDD / BPSK / MCS0 / Port 2



4.6. Transmitter Out of Band Conducted Emissions >1 GHz

4.6.1. 5.25-5.35 GHz band

Test Summary:

Test Engineers:	Matthew Botfield & Chanthu Thevarajah	Test Dates:	01 October 2019 to 04 October 2019
Test Sample Serial Number:	2428534		

FCC Reference:	Part 15.407(b)(2),(7) & 15.209(a)
Test Method Used:	KDB 789033 II.G. & ANSI C63.10 Sections 6.3 and 6.6
Frequency Range:	1 GHz to 40 GHz

Environmental Conditions:

Temperature (°C):	22 to 23
Relative Humidity (%):	40 to 62

Note(s):

1. FCC Part 15.407(b)(2) states for transmitters operating in the band 5.25 to 5.35 GHz: all emissions outside of the 5.15-5.35 GHz band will not exceed -27 dBm/MHz. Part(b)(7) states the provisions of 15.205 apply e.g. restricted bands of operation.
2. Pre-scans were performed with the EUT transmitting in the band 5.47 to 5.725 GHz band with a data rate of 802.11n / 20 MHz / MIMO / 2Tx CDD / MCS0 on middle channel as it produced the highest EIRP power spectral density and was therefore deemed worst case. An inquiry was made to the FCC and the response was pre-scans could be performed in the band with the highest power spectral density and all final measurements should be performed on any emissions seen in each band.
3. All other emissions shown on the pre-scan plots were investigated and found to be ambient, or >20 dB below the applicable limit or below the measurement system noise floor.
4. The final measured value, for the given emission in the field strength result tables, incorporates the calibrated antenna factor and cable loss.
5. The emission shown on the 1 GHz to 6 GHz plot is the EUT fundamental.
6. Appropriate RF filters and attenuators were used during pre-scans and final measurements. Insertion losses were entered on the spectrum analyser as RF levels offsets.
7. *In accordance with KDB 789033 Section II.G.1.c) if the peak measurement is below the average limit, it is not necessary to perform a separate average measurement.
8. The signal analyser reference level offset includes the 14.2 dBi antenna gain.

Transmitter Out of Band Conducted Emissions (5.25-5.35 GHz band operation) (continued)**Results: 802.11n / 20 MHz / MIMO / 2Tx CDD / BPSK / MCS0****Results: Bottom Channel / EIRP / Peak**

Frequency (MHz)	Port 1 Level (dBm)	Port 2 Level (dBm)	Combined Level (dB)	Directional Gain (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)	Result
7013.000	-43.4	-33.8	-33.3	3.0	-30.3	-27.0	3.3	Complied

Results: Middle Channel / EIRP / Peak

Frequency (MHz)	Port 1 Level (dBm)	Port 2 Level (dBm)	Combined Level (dB)	Directional Gain (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)	Result
7040.000	-44.9	-34.4	-34.0	3.0	-31.0	-27.0	4.0	Complied

Results: Top Channel / EIRP / Peak

Frequency (MHz)	Port 1 Level (dBm)	Port 2 Level (dBm)	Combined Level (dB)	Directional Gain (dB)	Corrected Level (dBm)	Limit (dBm)	Margin (dB)	Result
7093.000	-45.3	-39.9	-38.8	3.0	-35.8	-27.0	8.8	Complied

4.6.2. 5.47-5.725 GHz band**Transmitter Out of Band Conducted Emissions (5.47-5.725 GHz band operation)****Test Summary:**

Test Engineers:	Matthew Botfield & Chanthu Thevarajah	Test Dates:	01 October 2019 to 04 October 2019
Test Sample Serial Number:	2428534		

FCC Reference:	Part 15.407(b)(3),(7) & 15.209(a)
Test Method Used:	KDB 789033 II.G. & ANSI C63.10 Sections 6.3 and 6.6
Frequency Range:	1 GHz to 40 GHz

Environmental Conditions:

Temperature (°C):	22 to 23
Relative Humidity (%):	40 to 62

Note(s):

1. FCC Part 15.407(b)(3) states for transmitters operating in the band 5.25 to 5.35 GHz: all emissions outside of the band will not exceed -27 dBm/MHz. Part(b)(7) states the provisions of 15.205 apply e.g. restricted bands of operation.
2. Pre-scans were performed with the EUT transmitting in the band 5.47 to 5.725 GHz band with a data rate of 802.11n / 20 MHz / MIMO / 2Tx CDD / MCS0 on middle channel as it produced the highest EIRP power spectral density and was therefore deemed worst case. An inquiry was made to the FCC and the response was pre-scans could be performed in the band with the highest power spectral density and all final measurements should be performed on any emissions seen in each band.
3. All other emissions shown on the pre-scan plots were investigated and found to be ambient, or >20 dB below the applicable limit or below the measurement system noise floor.
4. The final measured value, for the given emission in the field strength result tables, incorporates the calibrated antenna factor and cable loss.
5. The emission shown on the 1 GHz to 6 GHz plot is the EUT fundamental.
6. Appropriate RF filters and attenuators were used during pre-scans and final measurements. Insertion losses were entered on the spectrum analyser as RF levels offsets.
7. *In accordance with KDB 789033 Section II.G.1.c) if the peak measurement is below the average limit, it is not necessary to perform a separate average measurement.
8. The signal analyser reference level offset includes the 14.2 dBi antenna gain.

Transmitter Out of Band Conducted Emissions (5.47-5.725 GHz band operation) (continued)**Results: 802.11n / 20 MHz / MIMO / 2Tx CDD / BPSK / MCS0****Results: Peak Detector / Bottom Channel / Peak**

Frequency (MHz)	Port 1 Level (dBm)	Port 2 Level (dBm)	Combined Level (dB)	Directional Gain (dB)	Corrected Peak Level (dBm)
7330.000	-47.6	-47.1	-44.3	3.0	-41.3

Frequency (MHz)	Corrected Peak Level (dBm)	EIRP(dBm) to EIRP (dBμV/m) Factor	Converted Level (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)	Result
7330.000	-41.3	95.2	53.9	54.0*	0.1	Complied

Results: Peak Detector / Middle Channel / Peak

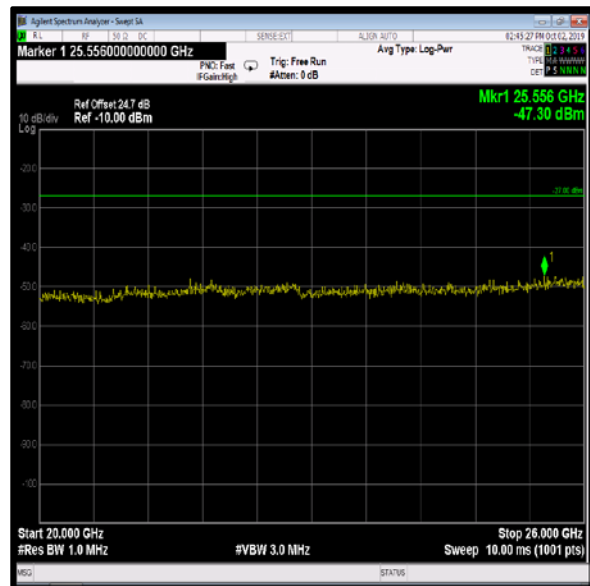
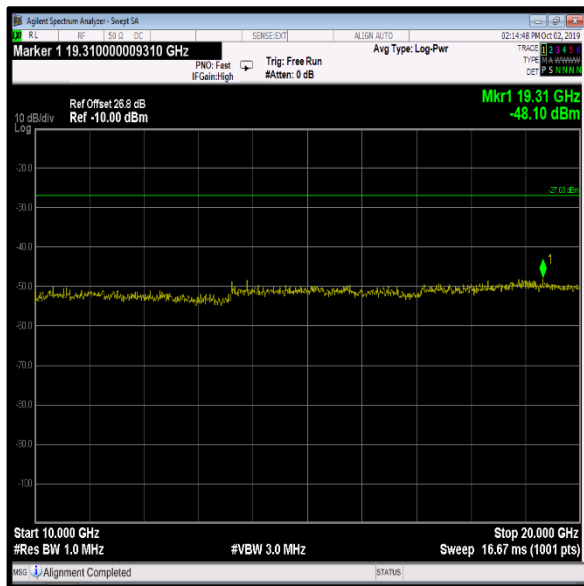
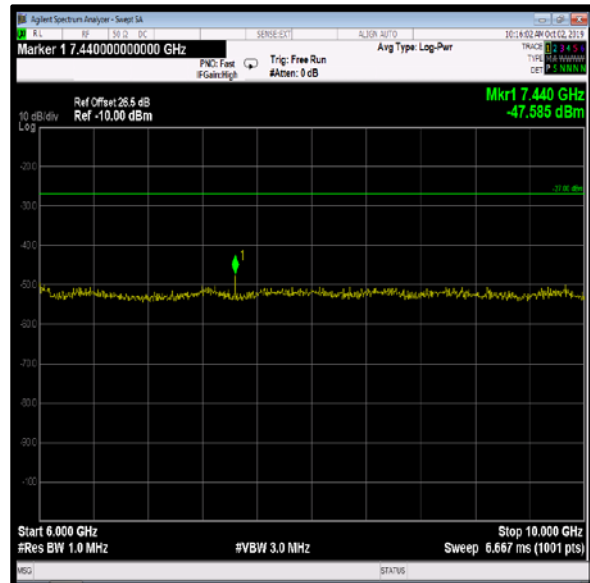
Frequency (MHz)	Port 1 Level (dBm)	Port 2 Level (dBm)	Combined Level (dB)	Directional Gain (dB)	Corrected Peak Level (dBm)
7440.000	-47.8	-47.4	-44.6	3.0	-41.6

Frequency (MHz)	Corrected Peak Level (dBm)	EIRP(dBm) to EIRP (dBμV/m) Factor	Converted Level (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)	Result
7440.000	-41.6	95.2	53.6	54.0*	0.4	Complied

Results: Peak Detector / Top Channel / Peak

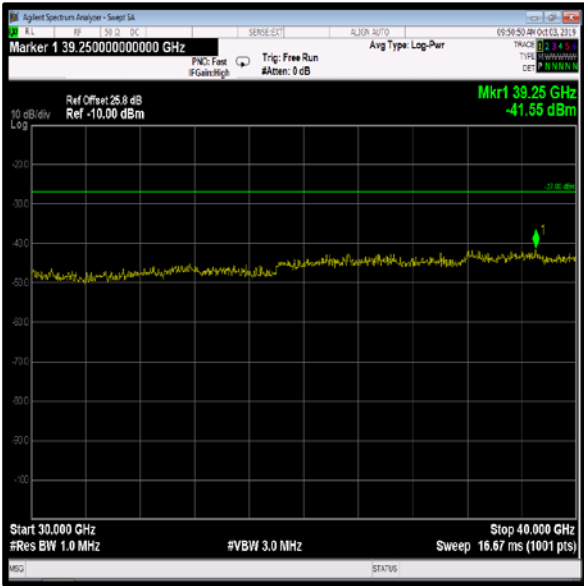
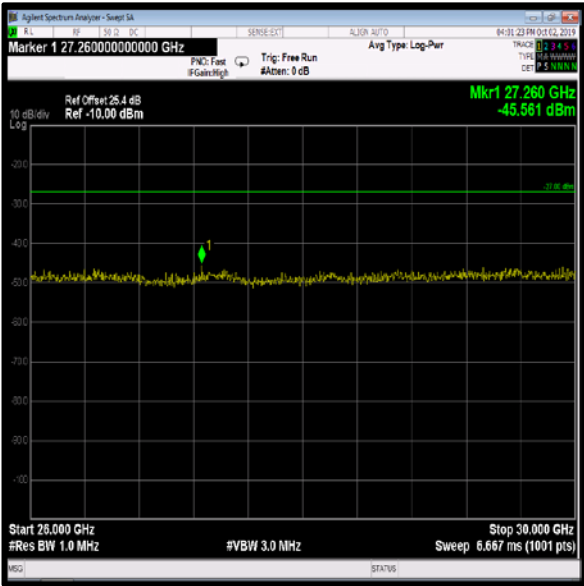
Frequency (MHz)	Port 1 Level (dBm)	Port 2 Level (dBm)	Combined Level (dB)	Directional Gain (dB)	Corrected Peak Level (dBm)
7600.000	-48.3	-47.8	-45.0	3.0	-42.0

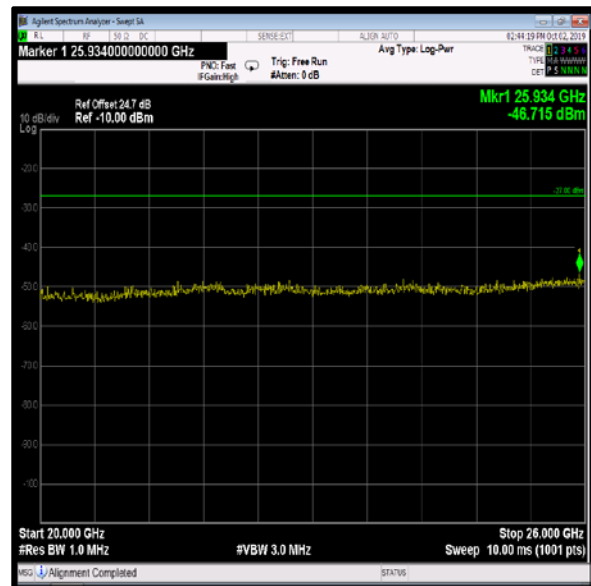
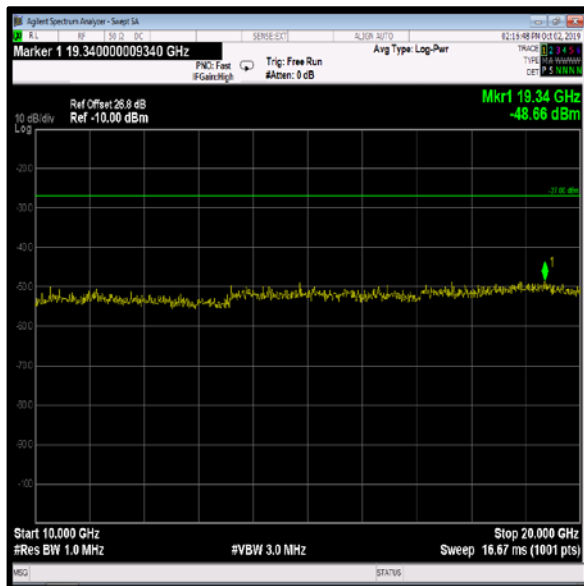
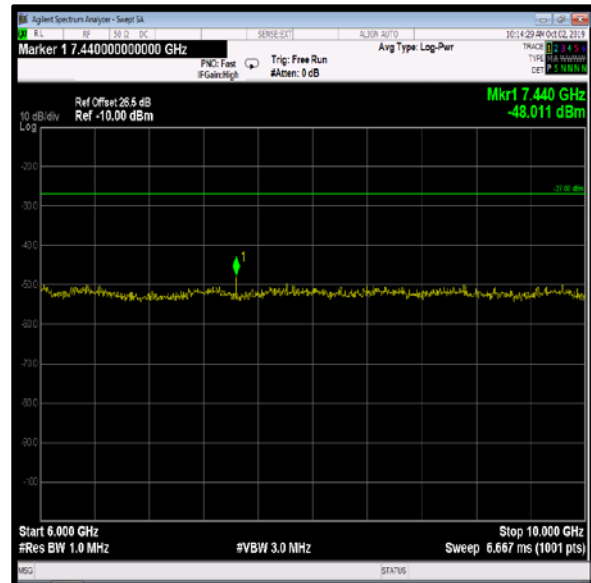
Frequency (MHz)	Corrected Peak Level (dBm)	EIRP(dBm) to EIRP (dBμV/m) Factor	Converted Field Strength Peak Level (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)	Result
7600.000	-42.0	95.2	53.2	54.0*	0.8	Complied

Transmitter Out of Band Conducted Emissions (continued)**Results: 802.11n / 20 MHz / MIMO / 2Tx CDD / BPSK / MCS0 / Port 1**

Transmitter Out of Band Conducted Emissions (continued)

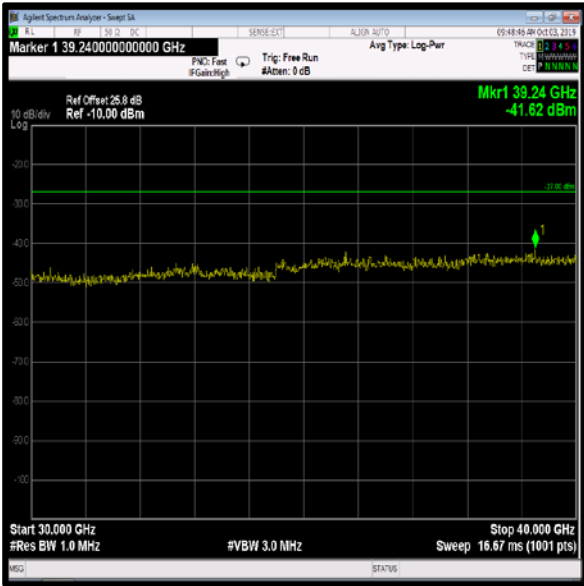
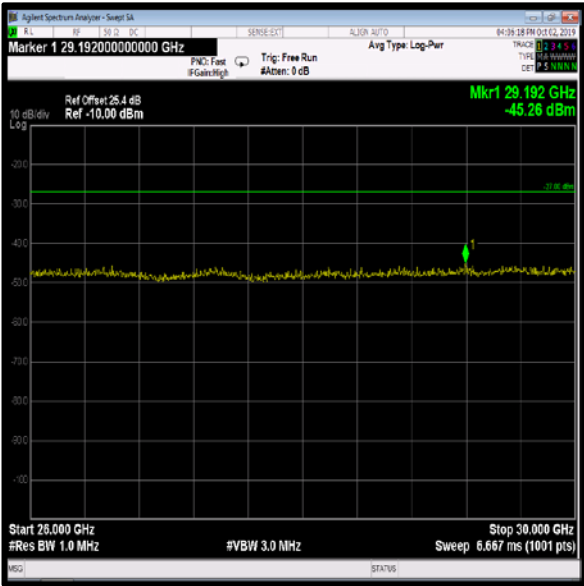
Results: 802.11n / 20 MHz / MIMO / 2Tx CDD / BPSK / MCS0 / Port 1



Transmitter Out of Band Conducted Emissions (continued)**Results: 802.11n / 20 MHz / MIMO / 2Tx CDD / BPSK / MCS0 / Port 2**

Transmitter Out of Band Conducted Emissions (continued)

Results: 802.11n / 20 MHz / MIMO / 2Tx CDD / BPSK / MCS0 / Port 2



5. Radiated Test Results

5.1. Transmitter Out of Band Cabinet Radiated Emissions <1 GHz

Test Summary:

Test Engineer:	Mark Perry	Test Date:	05 October 2019
Test Sample Serial Number:	2428534		

FCC Reference:	Parts 15.407(b)(2),(6),(7) & 15.209(a)
Test Method Used:	KDB 789033 II.G. & ANSI C63.10 Sections 6.3, 6.5 & 12.7
Frequency Range:	30 MHz to 1000 MHz

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	51

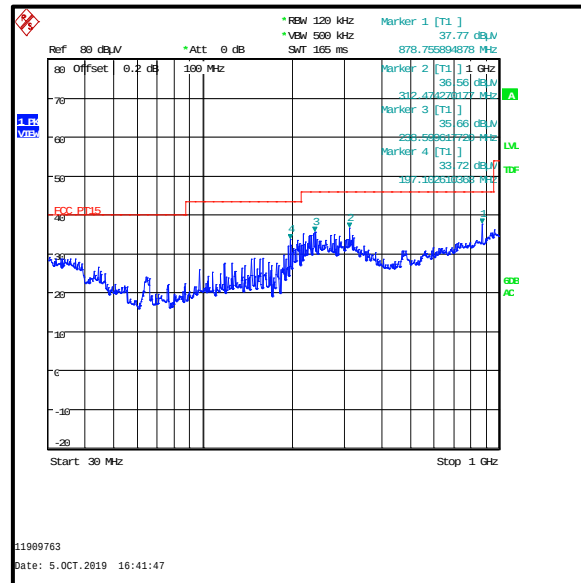
Note(s):

1. The final measured value, for the given emission in the field strength result tables, incorporates the calibrated antenna factor and cable loss.
2. Pre-scans were performed with the EUT transmitting with a data rate of 802.11n / 20 MHz / MIMO / 2Tx CDD / MCS0 on middle channel as it produced the highest EIRP power spectral density and was therefore deemed worst case. An inquiry was made to the FCC and the response was pre-scans could be performed in the band with the highest power spectral density and all final measurements should be performed on any emissions seen in each band.
3. The EUT was configured to transmit at the highest selectable power setting (26) to provide worst case results.
4. The preliminary scans showed similar emission levels below 1 GHz, for each channel of operation. Therefore final radiated emissions measurements were performed with the EUT set to the middle channel only.
5. All other emissions shown on the pre-scan were investigated and found to be ambient, or >20 dB below the applicable limit or below the measurement system noise floor.
6. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
7. Pre-scans were performed and markers placed on the highest measured levels. The test receiver resolution bandwidth was set to 120 kHz and video bandwidth 500 kHz. The sweep time was set to auto. A peak detector was used, sweep time was set to auto and trace mode was Max Hold.
8. Final measurements were performed on the marker frequencies and the results entered into the table below. The test receiver resolution bandwidth was set to 120 kHz, using a CISPR quasi-peak detector and span wide enough to see the whole emission.

Transmitter Out of Band Cabinet Radiated Emissions (5.25-5.35 GHz band operation) (continued)

Results: Quasi-Peak / Middle Channel / 802.11n / 20 MHz / MIMO / 2Tx CDD / MCS0

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
270.184	Horizontal	33.0	46.0	13.0	Complied
242.665	Horizontal	33.1	46.0	12.9	Complied

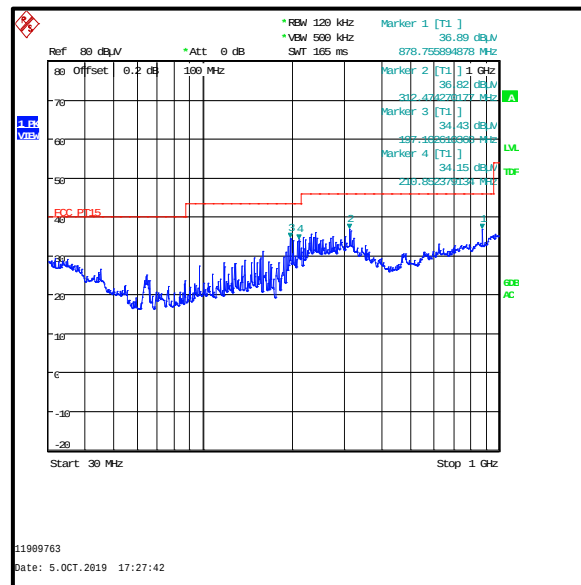


Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

Transmitter Out of Band Cabinet Radiated Emissions (5.47-5.725 GHz band operation) (continued)

Results: Quasi-Peak / Middle Channel / 802.11n / 20 MHz / MIMO / 2Tx CDD / MCS0

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
270.182	Horizontal	32.4	46.0	13.6	Complied
241.200	Horizontal	28.5	46.0	17.5	Complied



Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

5.2. Transmitter Out of Band Cabinet Radiated Emissions >1 GHz

5.2.1. 5.25-5.35 GHz band

Test Summary:

Test Engineer:	Mark Perry	Test Dates:	04 October 2019 & 05 October 2019
Test Sample Serial Number:	2428534		

FCC Reference:	Part 15.407(b)(2),(7) & 15.209(a)
Test Method Used:	KDB 789033 II.G. & ANSI C63.10 Sections 6.3, 6.6 & 12.7
Frequency Range:	1 GHz to 40 GHz

Environmental Conditions:

Temperature (°C):	22 to 23
Relative Humidity (%):	48 to 51

Note(s):

1. The final measured value, for the given emission in the field strength result tables, incorporates the calibrated antenna factor and cable loss.
2. Pre-scans were performed with the EUT transmitting with a data rate of 802.11n / 20 MHz / MIMO / 2Tx CDD / MCS0 on middle channel as it produced the highest EIRP power spectral density and was therefore deemed worst case.
3. The EUT was configured to transmit at the highest selectable power setting (26) to provide worst case results.
4. All other emissions shown on the pre-scan plots were investigated and found to be ambient, or >20 dB below the applicable limit or below the measurement system noise floor.
5. The emission shown on the 1 GHz to 6 GHz plot is the EUT fundamental.
6. Measurements were performed across the two restricted bands closest to the bands of operation with the EUT transmitting on the middle channel in the 5.25 to 5.35 GHz band. Plots are included in this section of the test report. Peak and average measurements were made.
7. Pre-scans above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT.
8. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Transmitter Out of Band Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: Bottom Channel / Field Strength / Peak**

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
15784.814	Vertical	65.4	74.0	8.6	Complied

Results: Bottom Channel / Field Strength / Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
15784.135	Vertical	48.1	54.0	5.9	Complied

Results: Middle Channel / EIRP / Peak

Frequency (MHz)	Antenna Polarity	Level (dBm)	Limit (dBm)	Margin (dB)	Result
7040.064	Horizontal	-42.6	-27.0	15.6	Complied

Results: Middle Channel / Field Strength / Peak

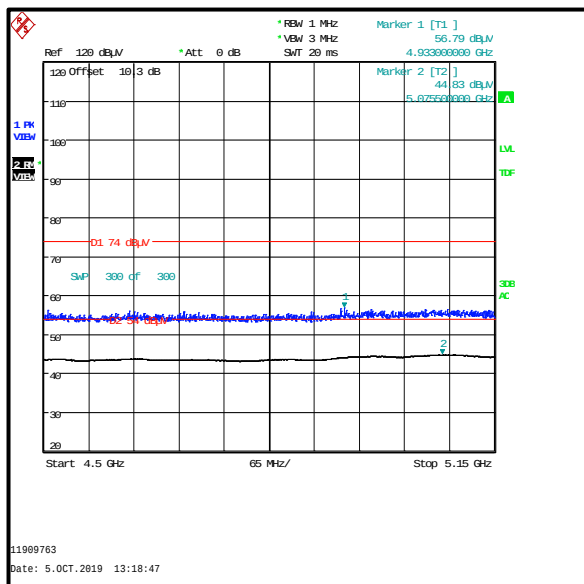
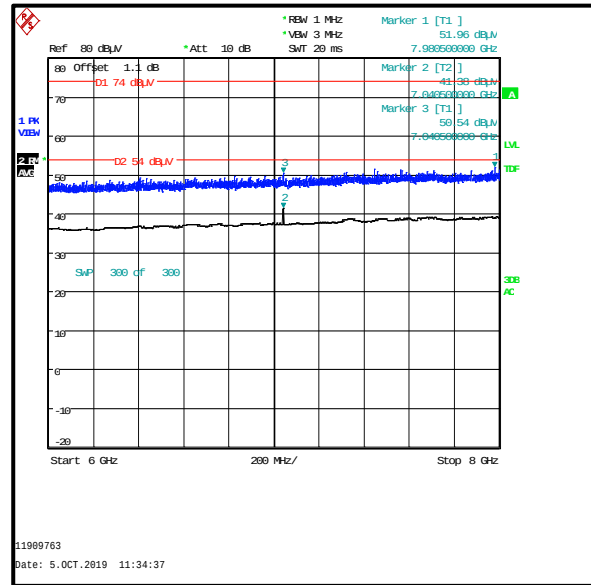
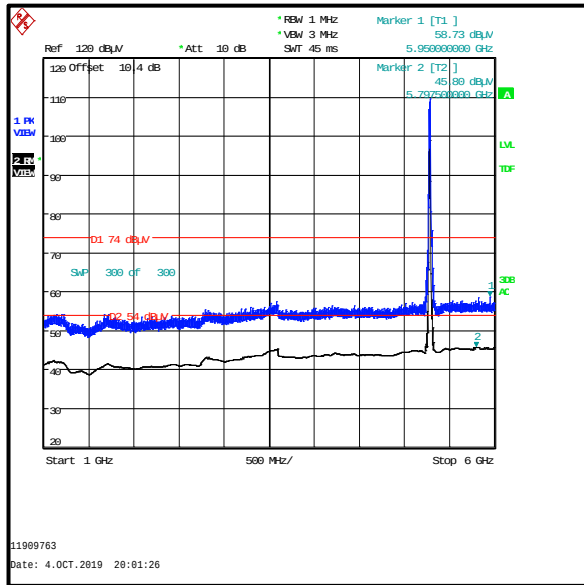
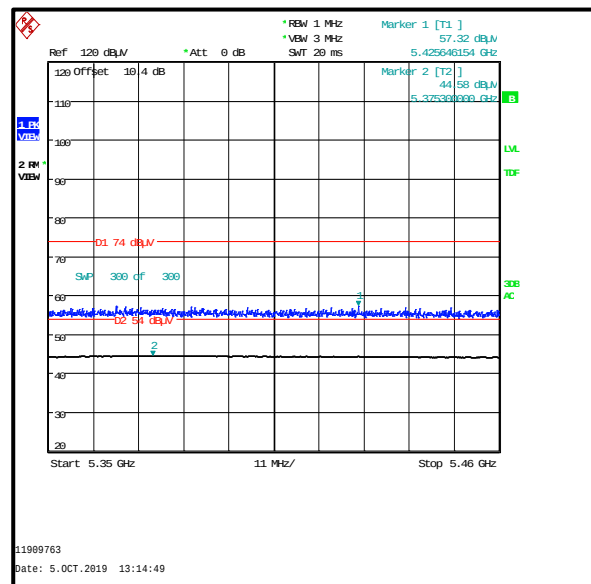
Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
15843.824	Vertical	65.0	74.0	9.0	Complied

Results: Middle Channel / Field Strength / Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
15843.984	Vertical	47.5	54.0	6.5	Complied

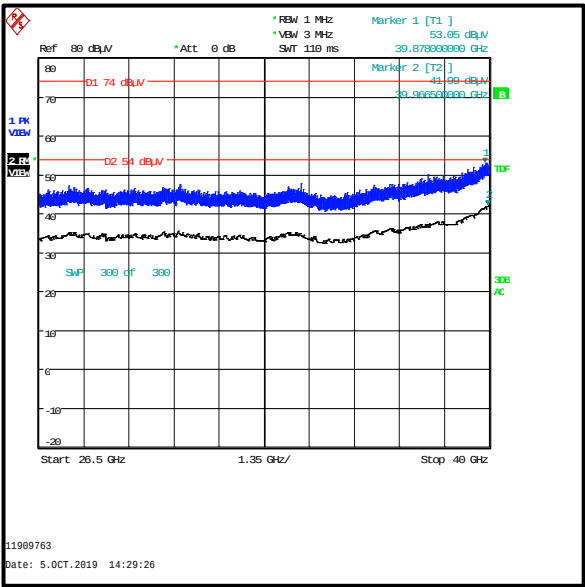
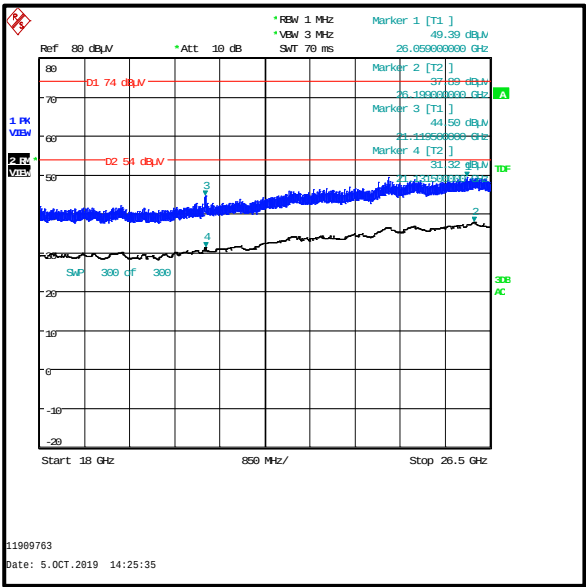
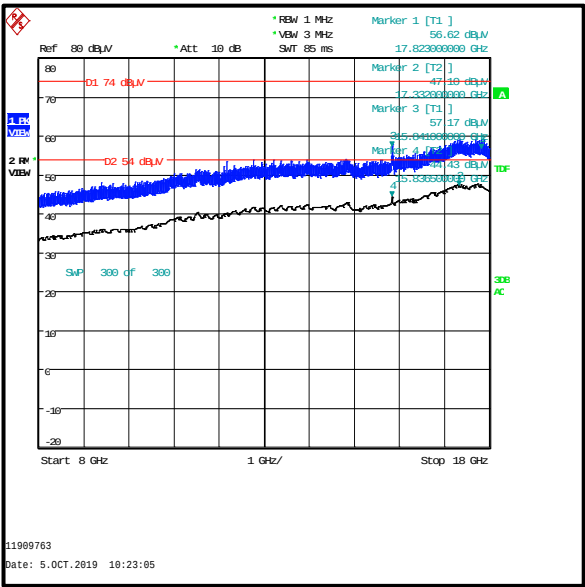
Results: Top Channel / EIRP

Frequency (MHz)	Antenna Polarity	Level (dBm)	Limit (dBm)	Margin (dB)	Result
7093.500	Horizontal	-43.3	-27.0	16.3	Complied

Transmitter Out of Band Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Restricted Band 4.5 GHz to 5.15 GHz****Restricted Band 5.35 GHz to 5.46 GHz**

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Transmitter Out of Band Radiated Emissions (5.25-5.35 GHz band operation) (continued)



Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

5.2.2. 5.47-5.725 GHz band**Transmitter Out of Band Radiated Emissions (5.47-5.725 GHz band operation)****Test Summary:**

Test Engineer:	Mark Perry	Test Date:	05 October 2019
Test Sample Serial Number:	2428534		

FCC Reference:	Part 15.407(b)(2),(7) & 15.209(a)
Test Method Used:	KDB 789033 II.G. & ANSI C63.10 Sections 6.3, 6.6 & 12.7
Frequency Range:	1 GHz to 40 GHz

Environmental Conditions:

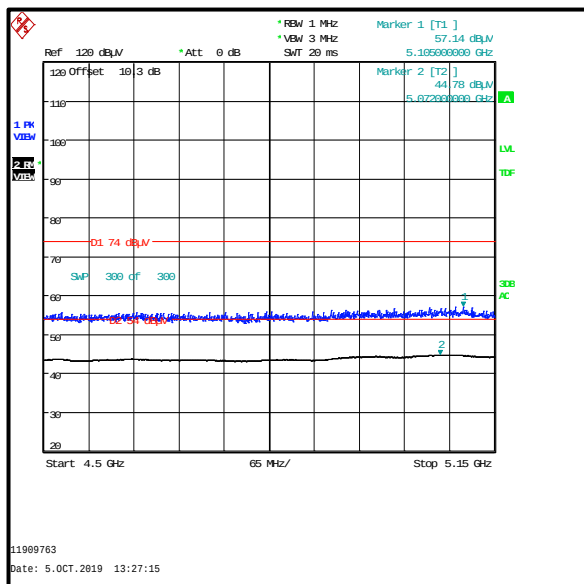
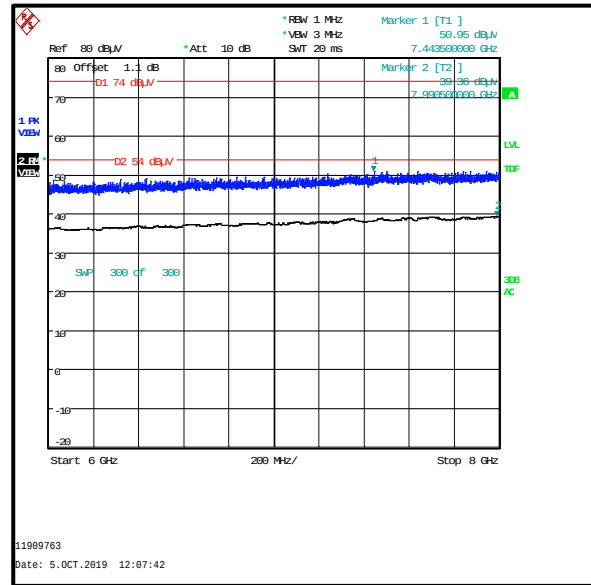
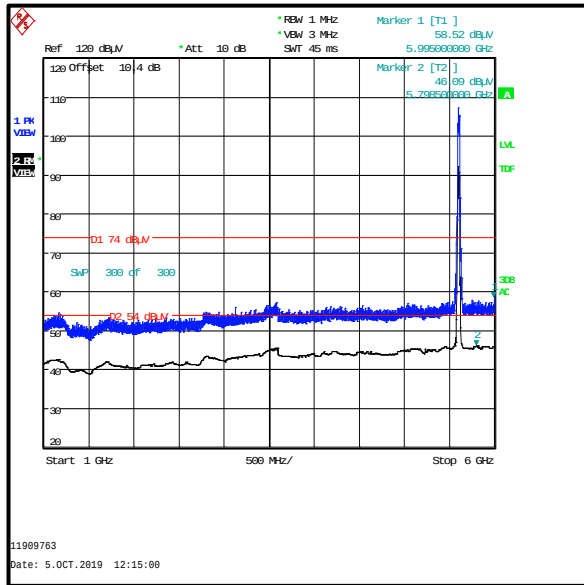
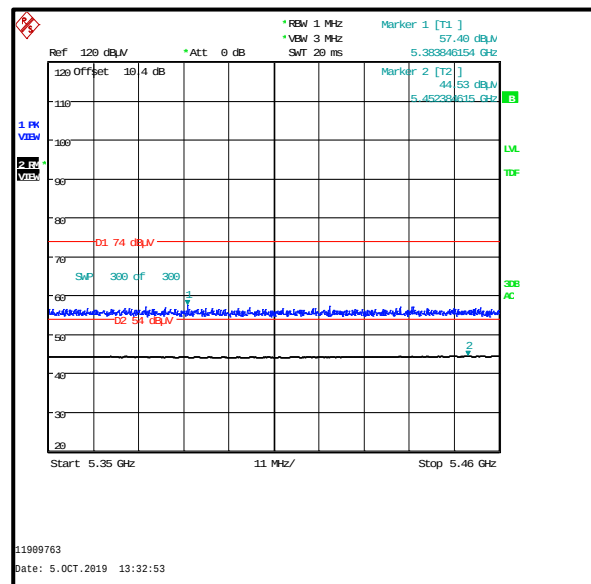
Temperature (°C):	23
Relative Humidity (%):	51

Note(s):

1. The final measured value, for the given emission in the field strength result tables, incorporates the calibrated antenna factor and cable loss.
2. Pre-scans were performed with the EUT transmitting with a data rate of 802.11n / 20 MHz / MIMO / 2Tx CDD / MCS0 on middle channel as it produced the highest EIRP power spectral density and was therefore deemed worst case.
3. The EUT was configured to transmit at the highest selectable power setting (26) to provide worst case results.
4. All emissions shown on the pre-scan plots were investigated and found to be ambient, or >20 dB below the applicable limit or below the measurement system noise floor. The highest noise floor reading has been recorded in the table below.
5. The emission shown on the 1 GHz to 6 GHz plot is the EUT fundamental.
6. Measurements were performed across the two restricted bands closest to the bands of operation with the EUT transmitting on the middle channel in the 5.25 to 5.35 GHz band. Plots are included in this section of the test report. Peak and average measurements were made.
7. Pre-scans above 1 GHz were performed in a fully anechoic chamber (Asset Number K0017) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT.

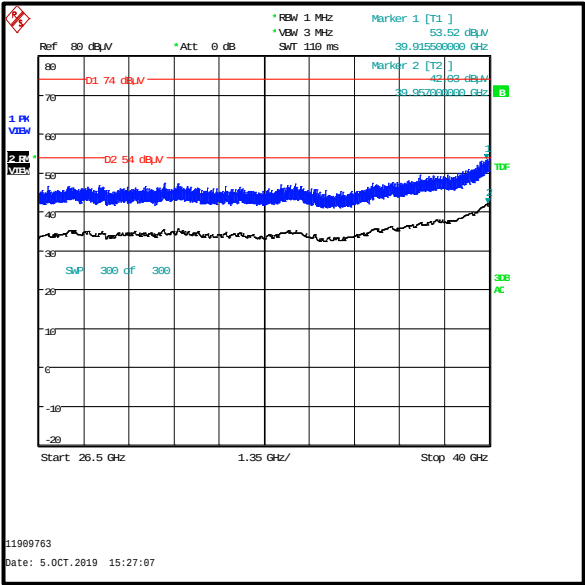
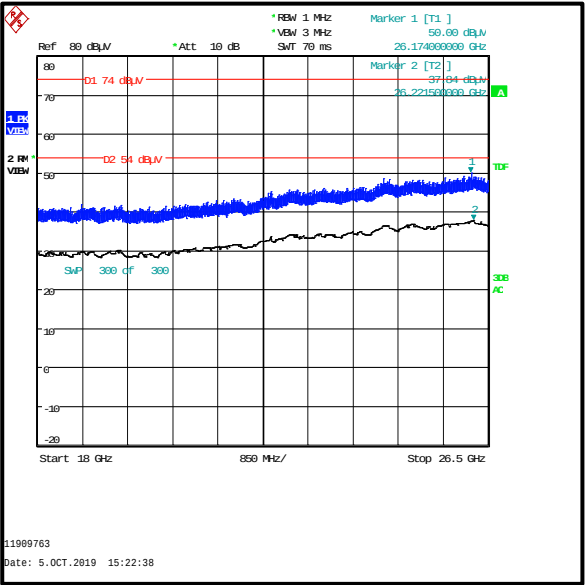
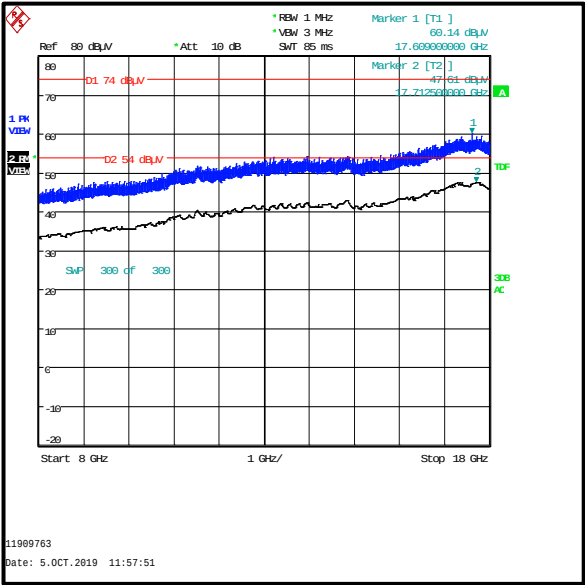
Results: Middle Channel / EIRP

Frequency (MHz)	Antenna Polarity	Level (dBμV/m)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
17609.000	Horizontal	60.1	-35.1	-27.0	8.1	Complied

Transmitter Out of Band Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Restricted Band 4.5 GHz to 5.15 GHz****Restricted Band 5.35 GHz to 5.46 GHz**

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Transmitter Out of Band Radiated Emissions (5.47-5.725 GHz band operation) (continued)



Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

5.3. Transmitter Band Edge Radiated Emissions**5.3.1. 5.25-5.35 GHz band****Test Summary:**

Test Engineers:	John Ferdinand, Andrew Harding, Mark Perry & Mohammed Toubella	Test Dates:	19 September 2019 to 27 September 2019
Test Sample Serial Number:	2405066 & 2428534		

FCC Reference:	Parts 15.407(b)(2),(7), 15.205 & 15.209(a)
Test Method Used:	ANSI C63.10 Section 6.10 & KDB 789033 II.G.

Environmental Conditions:

Temperature (°C):	21 to 24
Relative Humidity (%):	41 to 52

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Note(s):**

1. Measurements were performed in the EUT modes that produced the highest power and the widest bandwidths as these were deemed to be the worst case modes. The modes that produced the highest power and widest bandwidth were:
 - o 802.11a SISO – 64-QAM / 48 Mbps / Port 1
 - o 802.11n HT20 SISO – 64-QAM / MCS6 / Port 1
 - o 802.11n HT40 SISO – 16-QAM / MCS4 / Port 1
 - o 802.11ac VHT80 SISO – QPSK / MCS1x1 / Port 1
 - o 802.11ac VHT80 SISO – 256-QAM / MCS8x1 / Port 1
 - o 802.11a MIMO – 64-QAM / 54 Mbps / 2Tx CDD / Ports 1 & 2
 - o 802.11n HT20 MIMO – BPSK / MCS0 / 2Tx CDD / Ports 1 & 2
 - o 802.11n HT40 MIMO – 64-QAM / MCS7 / 2Tx CDD / Ports 1 & 2
 - o 802.11ac VHT80 MIMO – 64-QAM / MCS5x1 / 2Tx CDD / Ports 1 & 2
 - o 802.11ac VHT80 MIMO – 256-QAM / MCS9x1 / 2Tx CDD / Ports 1 & 2
 - o 802.11a MIMO – BPSK / 9 Mbps / 3Tx CDD / Ports 1, 2 & 3
 - o 802.11n HT20 MIMO – 16-QAM / MCS3 / 3Tx CDD / Ports 1, 2 & 3
 - o 802.11n HT20 MIMO – 64-QAM / MCS7 / 3Tx CDD / Ports 1, 2 & 3
 - o 802.11n HT40 MIMO – 64-QAM / MCS5 / 3Tx CDD / Ports 1, 2 & 3
 - o 802.11ac VHT80 MIMO – QPSK / MCS1x1 / 3Tx CDD / Ports 1, 2 & 3
 - o 802.11a MIMO – QPSK / 12 Mbps / 4Tx CDD / Ports 1, 2, 3 & 4
 - o 802.11n HT20 MIMO – QPSK / MCS1 / 4Tx CDD / Ports 1, 2, 3 & 4
 - o 802.11n HT40 MIMO – 16-QAM / MCS3 / 4Tx CDD / Ports 1, 2, 3 & 4
 - o 802.11ac VHT80 MIMO – 16-QAM / MCS3x1 / 4Tx CDD / Ports 1, 2, 3 & 4
2. Lower band edge measurements were performed with the EUT transmitting on the bottom channel. Upper band edge measurements were performed with the EUT transmitting on the top channel.
3. For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. However, there are restricted bands of operation below the lower band edge at 4.5-5.15 GHz and also above the upper band edge at 5.35-5.46 GHz therefore the provisions of FCC Part 15.205 apply. Tests were performed in these restricted bands of operation with the EUT transmitting on the bottom and top channels within 5.25-5.35 GHz band.
4. Field strength measurements using peak and average detectors were performed in the restricted bands below 5.15 GHz and above 5.35 GHz. Field strength and EIRP results were found to be compliant with the restricted band limits and Part 15.407 out-of-band limits.
5. For all average measurements in this section, 300 sweeps were used. This satisfies the requirement for the minimum number of sweep points, as stated in KDB 789033 Section II.G.6.c) Method AD (vi).
6. In accordance with KDB 789033 Section II.G.6.c) Method AD (vii), for average measurements, data rates where the EUT was transmitting <98% duty cycle, the duty cycle correction factor calculated in section 4.1 was added to the measured result.

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 802.11a / 20 MHz / SISO / 64-QAM / 48 Mbps / Port 1****Results: Lower Band Edge / Peak**

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5136.154	59.9	74.0	14.1	Complied
5150.000	57.7	74.0	16.3	Complied

Results: Upper Band Edge / Peak

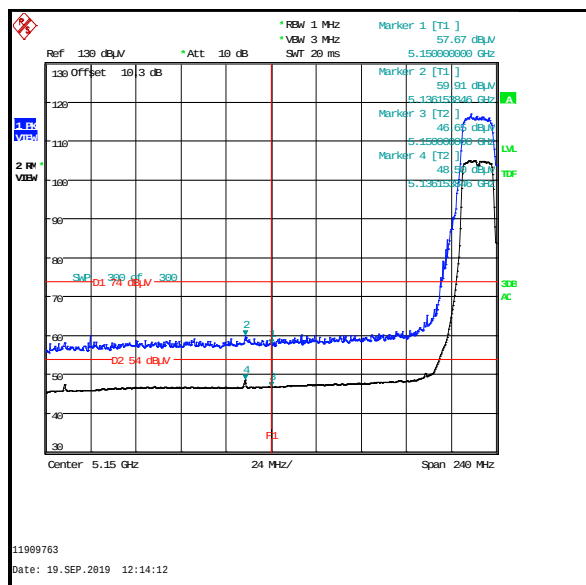
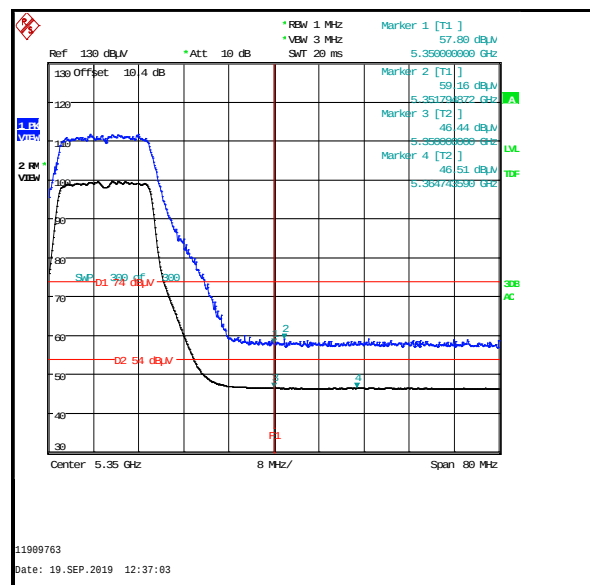
Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5350.000	57.8	74.0	16.2	Complied
5351.795	59.2	74.0	14.8	Complied

Results: Lower Band Edge / Average

Frequency (MHz)	Level (dBμV/m)	Duty Cycle correction (dB)	Corrected Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5136.154	48.5	1.6	50.1	54.0	3.9	Complied
5150.000	46.7	1.6	48.3	54.0	5.7	Complied

Results: Upper Band Edge / Average

Frequency (MHz)	Level (dBμV/m)	Duty Cycle correction (dB)	Corrected Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5350.000	46.4	1.5	47.9	54.0	6.1	Complied
5364.744	46.5	1.5	48.0	54.0	6.0	Complied

**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 802.11n / 20 MHz / SISO / 64-QAM / MCS6 / Port 1****Results: Lower Band Edge / Peak**

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5098.077	58.6	74.0	15.4	Complied
5150.000	57.7	74.0	16.3	Complied

Results: Upper Band Edge / Peak

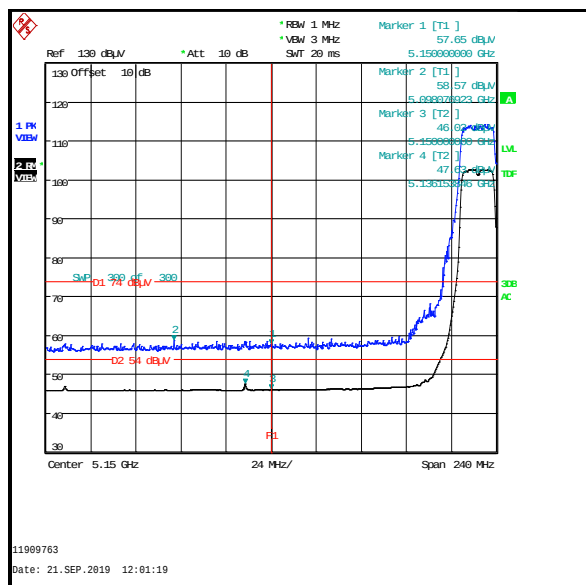
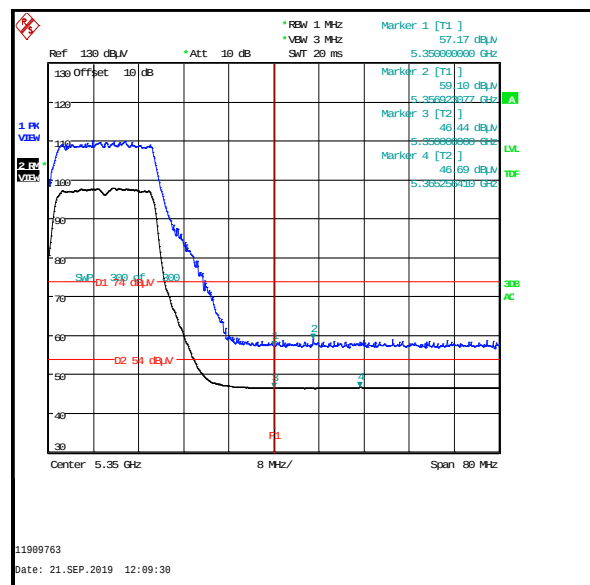
Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5350.000	57.2	74.0	16.8	Complied
5356.923	59.1	74.0	14.9	Complied

Results: Lower Band Edge / Average

Frequency (MHz)	Level (dBμV/m)	Duty Cycle correction (dB)	Corrected Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5136.154	47.7	1.7	49.4	54.0	4.6	Complied
5150.000	46.0	1.7	47.7	54.0	6.3	Complied

Results: Upper Band Edge / Average

Frequency (MHz)	Level (dBμV/m)	Duty Cycle correction (dB)	Corrected Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5350.000	46.4	1.8	48.2	54.0	5.8	Complied
5365.256	46.7	1.8	48.5	54.0	5.5	Complied

**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 802.11n / 40 MHz / SISO / 16-QAM / MCS4 / Port 1****Results: Lower Band Edge / Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5110.962	56.5	74.0	17.5	Complied
5150.000	53.4	74.0	20.6	Complied

Results: Upper Band Edge / Peak

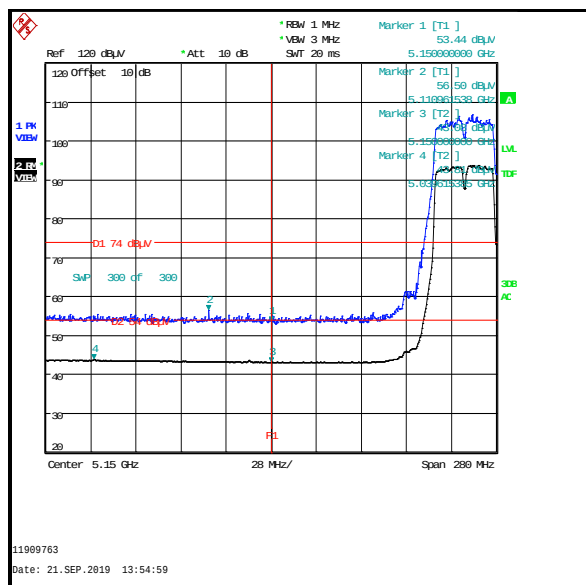
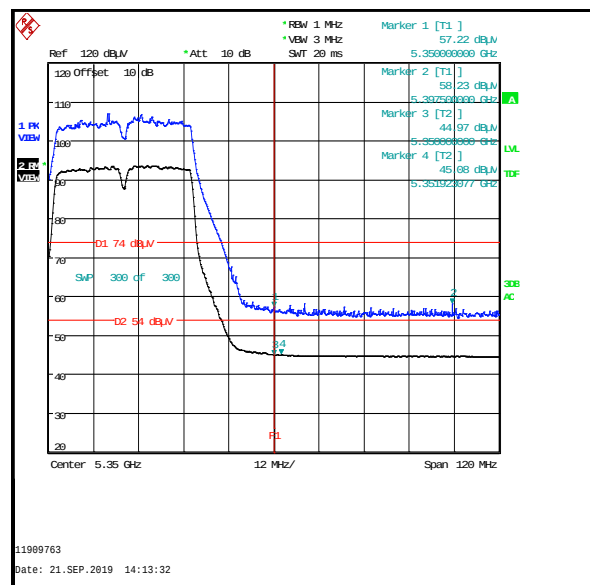
Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	57.2	74.0	16.8	Complied
5397.500	58.2	74.0	15.8	Complied

Results: Lower Band Edge / Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5039.615	43.8	2.2	46.0	54.0	7.0	Complied
5150.000	43.1	2.2	45.3	54.0	8.7	Complied

Results: Upper Band Edge / Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	45.0	2.2	47.2	54.0	6.8	Complied
5351.923	45.1	2.2	47.2	54.0	6.8	Complied

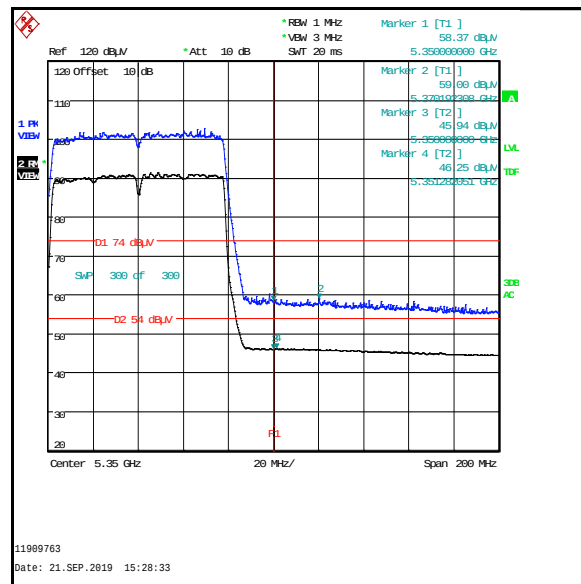
**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 802.11ac / 80 MHz / SISO / QPSK / MCS1x1 / Port 1****Results: Upper Band Edge / Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	58.4	74.0	15.6	Complied
5370.192	59.0	74.0	15.0	Complied

Results: Upper Band Edge / Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	45.9	1.5	47.4	54.0	6.6	Complied
5351.282	46.3	1.5	47.8	54.0	6.2	Complied

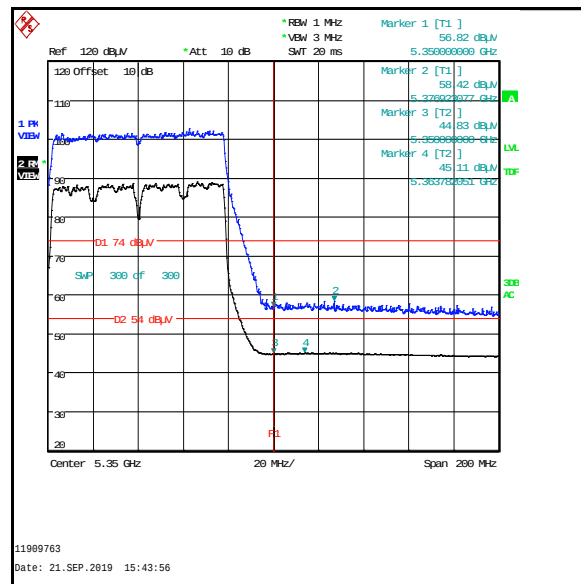
**Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 802.11ac / 80 MHz / SISO / 256-QAM / MCS8x1 / Port 1****Results: Upper Band Edge / Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	56.8	74.0	17.2	Complied
5376.923	58.4	74.0	15.6	Complied

Results: Upper Band Edge / Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	44.8	3.5	48.3	54.0	5.7	Complied
5363.782	45.1	3.5	48.6	54.0	5.4	Complied

**Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 802.11a / 20 MHz / MIMO / 2Tx CDD / 64-QAM / 54 Mbps / Port 1 & 2****Results: Lower Band Edge / Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5083.462	58.2	74.0	15.8	Complied
5150.000	57.0	74.0	17.0	Complied

Results: Upper Band Edge / Peak

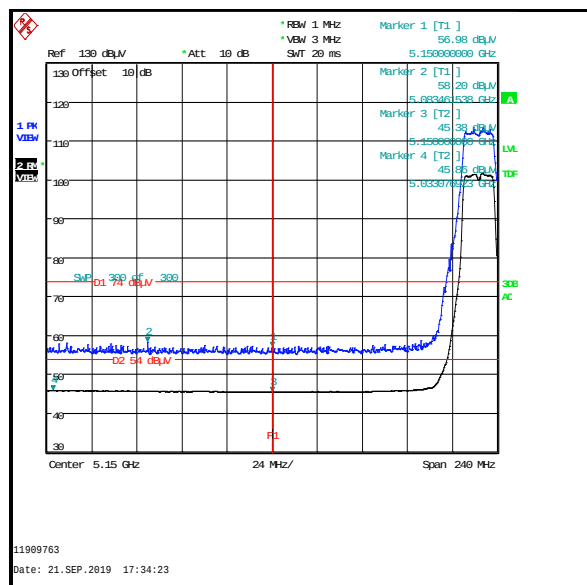
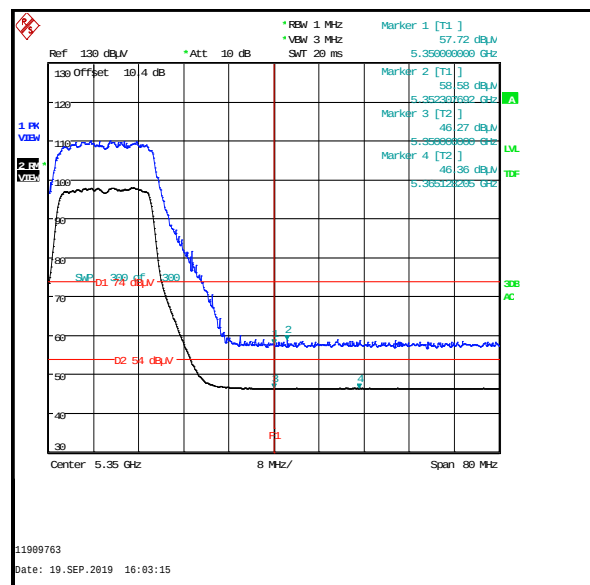
Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	57.7	74.0	16.3	Complied
5352.231	58.6	74.0	15.4	Complied

Results: Lower Band Edge / Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5033.077	45.9	1.4	47.3	54.0	6.7	Complied
5150.000	45.4	1.4	46.8	54.0	7.2	Complied

Results: Upper Band Edge / Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	46.3	1.4	47.7	54.0	6.3	Complied
5365.128	46.4	1.4	47.8	54.0	6.2	Complied

**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 802.11n / 20 MHz / MIMO / 2Tx CDD / BPSK / MCS0 / Port 1 & 2****Results: Lower Band Edge / Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5095.385	58.1	74.0	15.9	Complied
5150.000	56.3	74.0	17.7	Complied

Results: Upper Band Edge / Peak

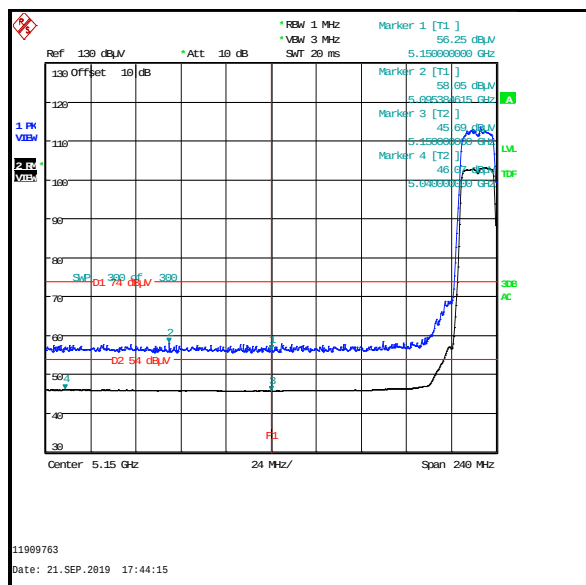
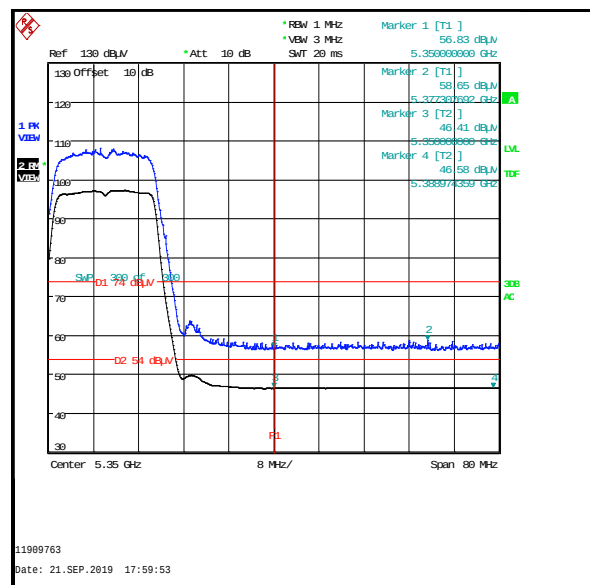
Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	56.8	74.0	17.2	Complied
5377.308	58.7	74.0	15.3	Complied

Results: Lower Band Edge / Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5040.000	46.1	1.5	47.6	54.0	6.4	Complied
5150.000	45.7	1.5	47.2	54.0	6.8	Complied

Results: Upper Band Edge / Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350	46.4	1.8	48.2	54.0	5.8	Complied
5388.974	46.6	1.8	48.4	54.0	5.6	Complied

**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 802.11n / 40 MHz / MIMO / 2Tx CDD / 64-QAM / MCS7 / Port 1 & 2****Results: Lower Band Edge / Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5066.090	56.7	74.0	17.3	Complied
5150.000	54.5	74.0	19.5	Complied

Results: Upper Band Edge / Peak

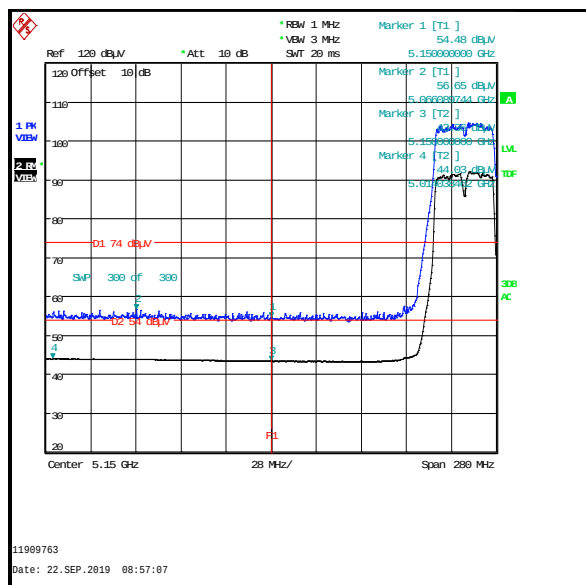
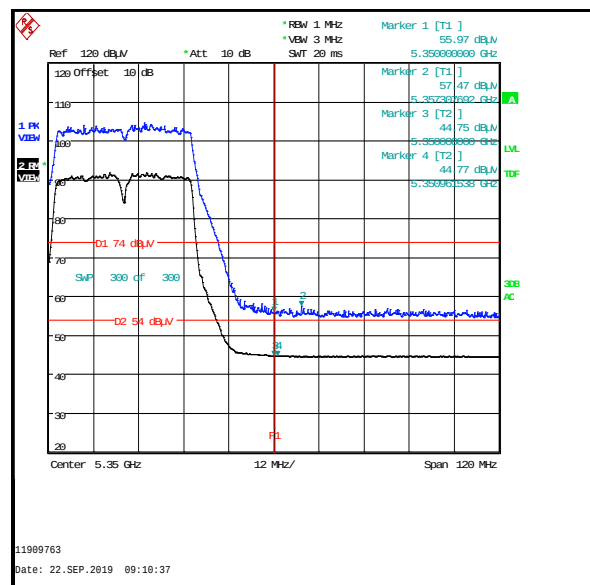
Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	56.0	74.0	18.0	Complied
5357.308	57.5	74.0	16.5	Complied

Results: Lower Band Edge / Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5014.039	44.0	3.3	47.3	54.0	6.7	Complied
5150.000	43.4	3.3	46.7	54.0	7.3	Complied

Results: Upper Band Edge / Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	44.8	2.1	46.9	54.0	7.1	Complied
5350.962	44.8	2.1	46.9	54.0	7.1	Complied

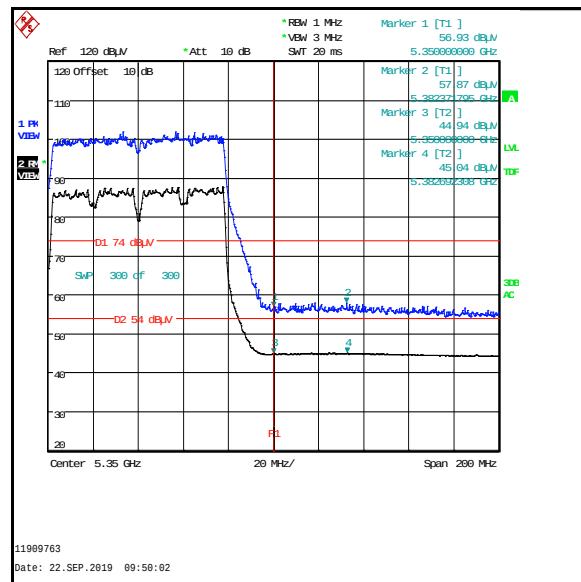
**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 802.11ac / 80 MHz / MIMO / 2Tx CDD / 64-QAM / MCS5x1 / Port 1 & 2****Results: Upper Band Edge / Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	56.9	74.0	17.1	Complied
5382.372	57.9	74.0	16.1	Complied

Results: Upper Band Edge / Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	44.9	3.6	48.5	54.0	5.5	Complied
5382.692	45.0	3.6	48.6	54.0	5.4	Complied

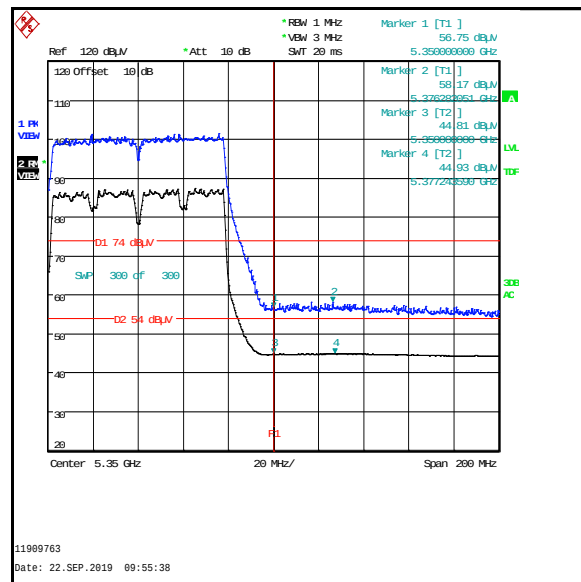
**Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 802.11ac / 80 MHz / MIMO / 2Tx CDD / 256-QAM / MCS9x1 / Port 1 & 2****Results: Upper Band Edge / Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	56.8	74.0	17.2	Complied
5376.282	58.2	74.0	15.8	Complied

Results: Upper Band Edge / Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	44.8	3.6	48.4	54.0	5.6	Complied
5377.244	44.9	3.6	48.5	54.0	5.5	Complied

**Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 802.11a / 20 MHz / MIMO / 3Tx CDD / BPSK / 9 Mbps / Port 1, 2 & 3****Results: Lower Band Edge / Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5048.846	57.7	74.0	16.3	Complied
5150.000	56.1	74.0	17.1	Complied

Results: Upper Band Edge / Peak

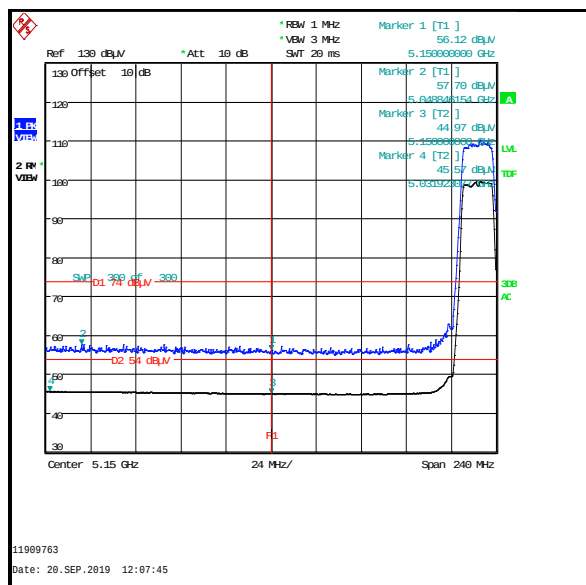
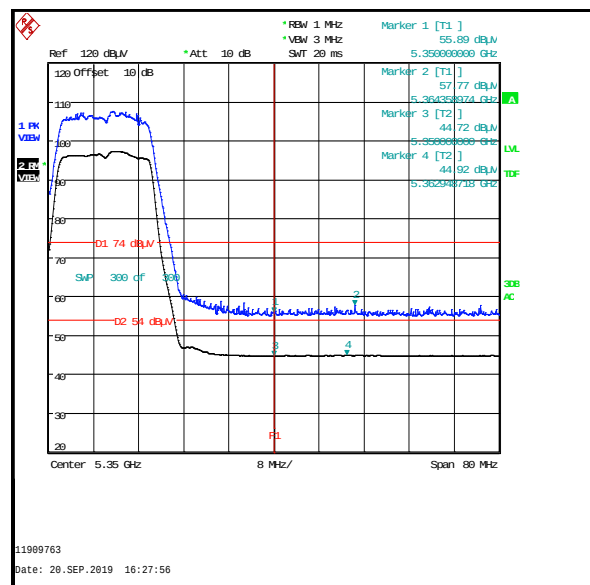
Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	55.9	74.0	18.1	Complied
5364.359	57.8	74.0	16.2	Complied

Results: Lower Band Edge / Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5031.923	45.6	0.6	46.2	54.0	7.8	Complied
5150.000	45.0	0.6	45.6	54.0	8.4	Complied

Results: Upper Band Edge / Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	44.7	0.7	45.4	54.0	8.6	Complied
5362.949	44.9	0.7	45.6	54.0	8.4	Complied

**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 802.11n / 20 MHz / MIMO / 3Tx CDD / 16-QAM / MCS3 / Port 1, 2 & 3****Results: Lower Band Edge / Peak**

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5088.846	58.3	74.0	15.7	Complied
5150.000	56.9	74.0	17.1	Complied

Results: Upper Band Edge / Peak

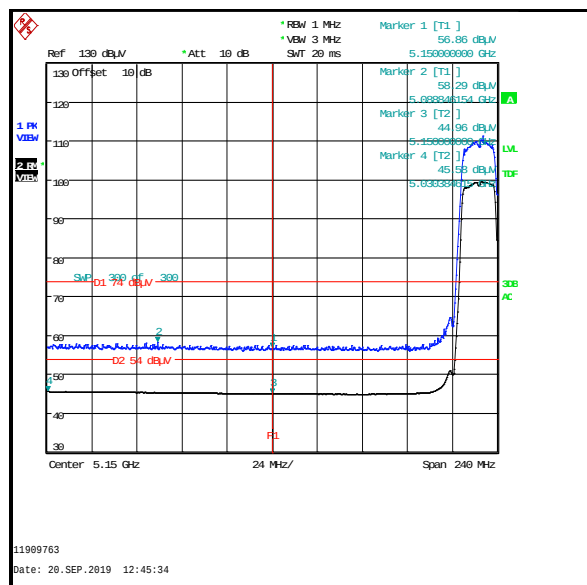
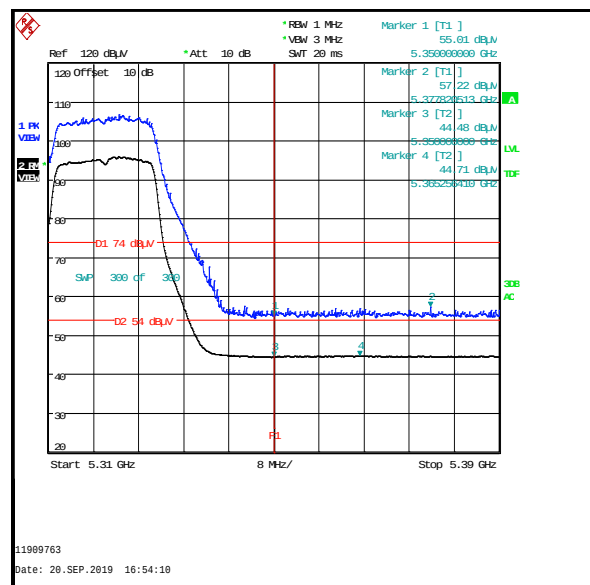
Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5350.000	55.0	74.0	19.0	Complied
5377.821	57.2	74.0	16.8	Complied

Results: Lower Band Edge / Average

Frequency (MHz)	Level (dBμV/m)	Duty Cycle correction (dB)	Corrected Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5030.385	45.6	1.1	46.7	54.0	7.3	Complied
5150.000	45.0	1.1	46.1	54.0	7.9	Complied

Results: Upper Band Edge / Average

Frequency (MHz)	Level (dBμV/m)	Duty Cycle correction (dB)	Corrected Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5350	44.5	1.3	45.8	54.0	8.2	Complied
5365.256	44.7	1.3	46.0	54.0	8.0	Complied

**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 802.11n / 20 MHz / MIMO / 3Tx CDD / 64-QAM / MCS7 / Port 1, 2 & 3****Results: Lower Band Edge / Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5126.154	58.1	74.0	15.9	Complied
5150.000	56.0	74.0	18.0	Complied

Results: Upper Band Edge / Peak

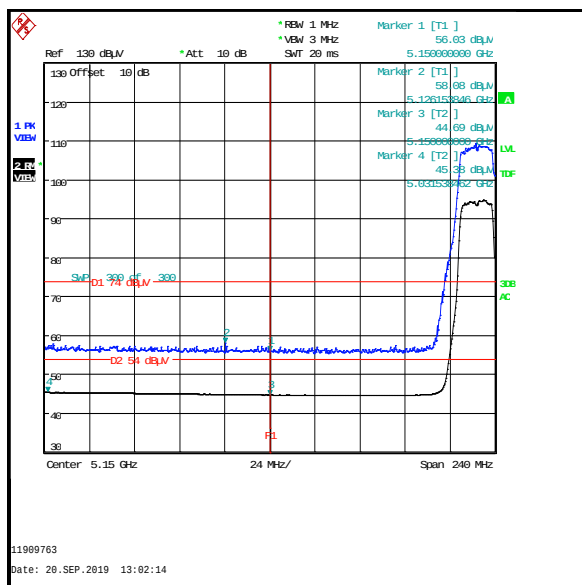
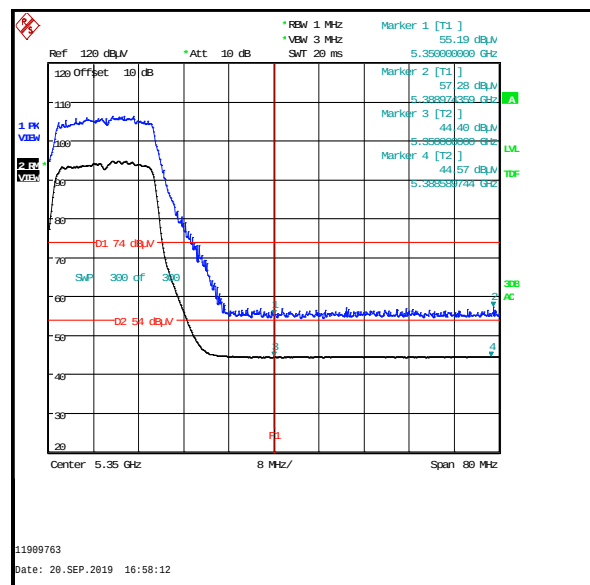
Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	55.2	74.0	18.8	Complied
5388.975	57.3	74.0	16.7	Complied

Results: Lower Band Edge / Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5031.538	45.4	1.9	47.3	54.0	6.7	Complied
5150.000	44.7	1.9	46.6	54.0	7.4	Complied

Results: Upper Band Edge / Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	44.4	2.1	46.5	54.0	7.5	Complied
5388.590	44.6	2.1	46.7	54.0	7.3	Complied

**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 802.11n / 40 MHz / MIMO / 3Tx CDD / 64-QAM / MCS5 / Port 1, 2 & 3****Results: Lower Band Edge / Peak**

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5028.397	56.4	74.0	17.6	Complied
5150.000	53.9	74.0	20.1	Complied

Results: Upper Band Edge / Peak

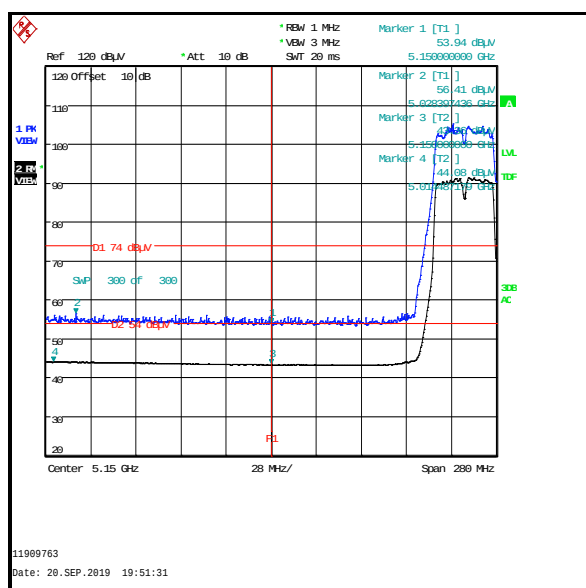
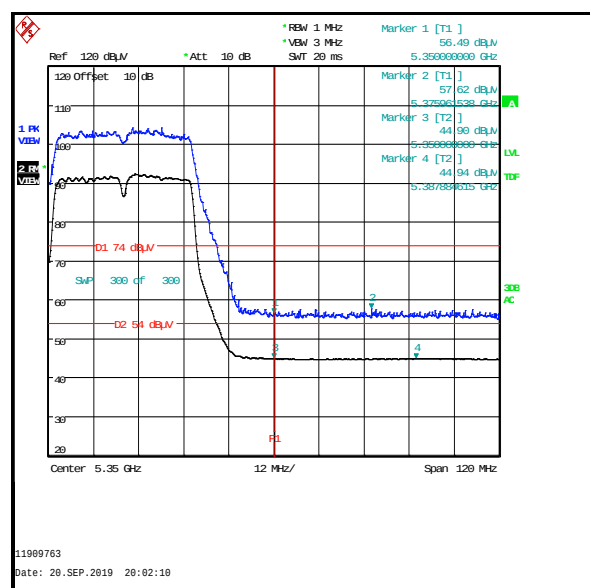
Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5350.000	56.5	74.0	17.5	Complied
5375.962	57.6	74.0	16.4	Complied

Results: Lower Band Edge / Average

Frequency (MHz)	Level (dBμV/m)	Duty Cycle correction (dB)	Corrected Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5014.487	44.1	1.8	45.9	54.0	8.1	Complied
5150.000	43.4	1.8	45.2	54.0	8.8	Complied

Results: Upper Band Edge / Average

Frequency (MHz)	Level (dBμV/m)	Duty Cycle correction (dB)	Corrected Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5350.000	44.9	2.0	46.9	54.0	7.1	Complied

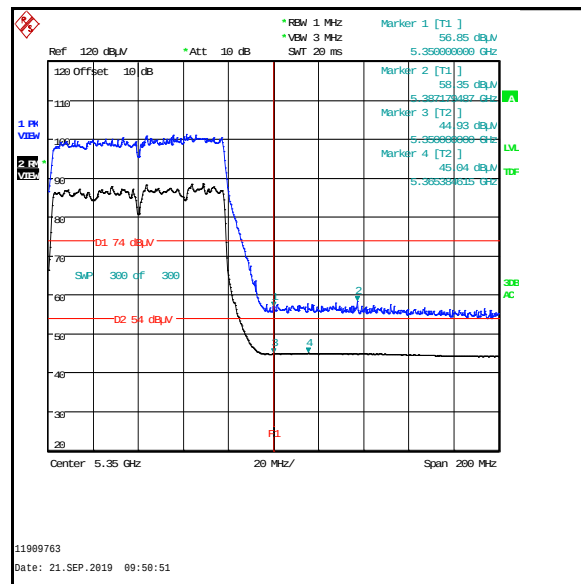
**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 802.11ac / 80 MHz / MIMO / 3Tx CDD / QPSK / MCS1x1 / Port 1, 2 & 3****Results: Upper Band Edge / Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	56.9	74.0	17.1	Complied
5387.180	58.4	74.0	15.6	Complied

Results: Upper Band Edge / Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	44.9	2.3	47.2	54.0	6.8	Complied
5365.385	45.0	2.3	47.3	54.0	6.7	Complied

**Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 802.11a / 20 MHz / MIMO / 4Tx CDD / QPSK / 12 Mbps / Port 1, 2, 3 & 4****Results: Lower Band Edge / Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5058.077	58.3	74.0	15.7	Complied
5150.000	54.8	74.0	19.2	Complied

Results: Upper Band Edge / Peak

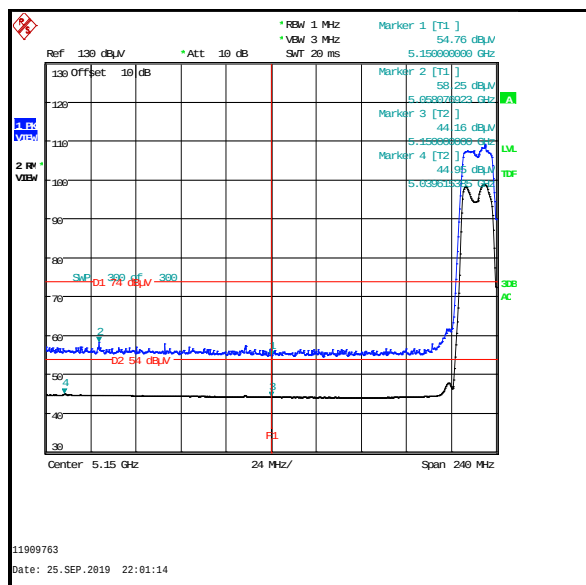
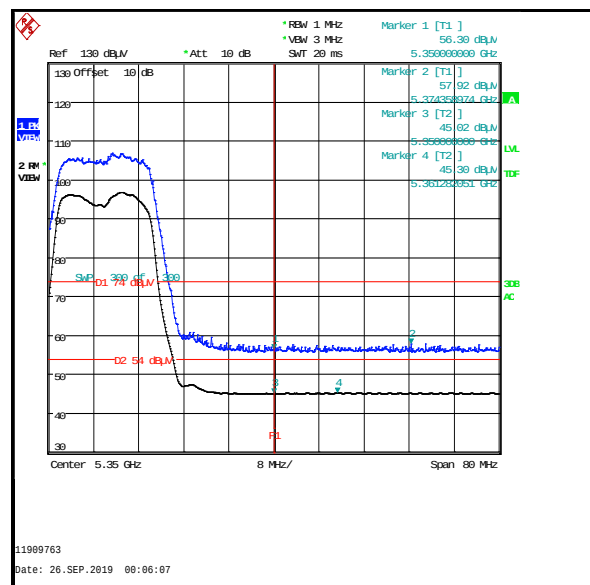
Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	56.3	74.0	17.7	Complied
5374.359	57.9	74.0	16.1	Complied

Results: Lower Band Edge / Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5039.615	45.0	0.6	45.6	54.0	8.4	Complied
5150.000	44.2	0.6	44.8	54.0	9.2	Complied

Results: Upper Band Edge / Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	45.0	0.4	45.4	54.0	8.6	Complied
5361.282	45.3	0.4	45.7	54.0	8.3	Complied

**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 802.11n / 20 MHz / MIMO / 4Tx CDD / QPSK / MCS1 / Port 1, 2, 3 & 4****Results: Lower Band Edge / Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5043.077	56.8	74.0	17.2	Complied
5150.000	55.4	74.0	18.6	Complied

Results: Upper Band Edge / Peak

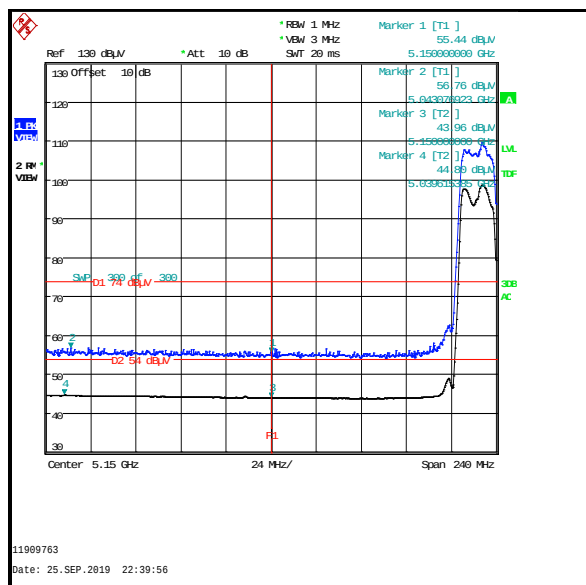
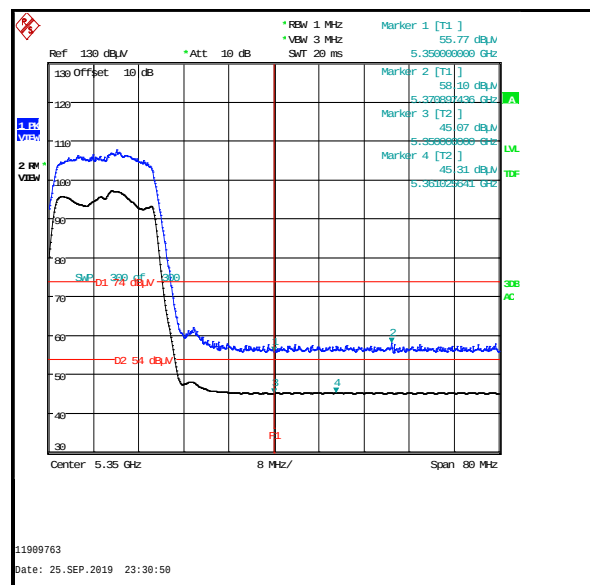
Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	55.8	74.0	18.2	Complied
5370.897	58.1	74.0	15.9	Complied

Results: Lower Band Edge / Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5039.615	44.8	0.5	45.3	54.0	8.7	Complied
5150.000	44.0	0.5	44.5	54.0	9.5	Complied

Results: Upper Band Edge / Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	45.1	0.6	45.7	54.0	8.3	Complied
5361.024	45.3	0.6	45.9	54.0	8.1	Complied

**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 802.11n / 40 MHz / MIMO / 4Tx CDD / 16-QAM / MCS3 / Port 1, 2, 3 & 4****Results: Lower Band Edge / Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5036.923	56.7	74.0	17.3	Complied
5150.000	54.8	74.0	19.2	Complied

Results: Upper Band Edge / Peak

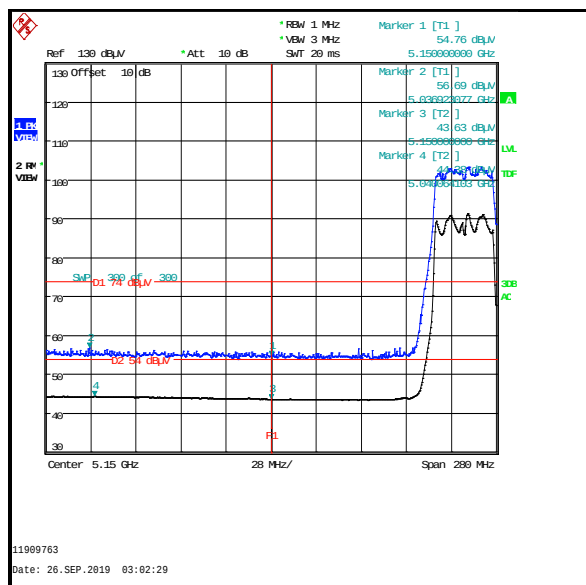
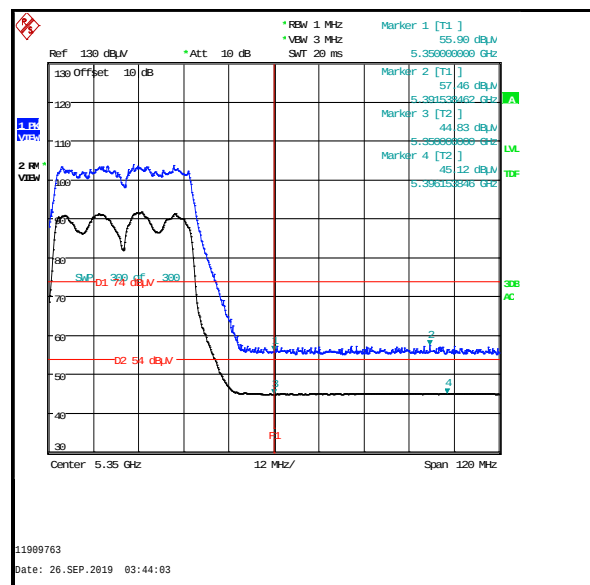
Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	55.9	74.0	18.1	Complied
5391.538	57.5	74.0	16.5	Complied

Results: Lower Band Edge / Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5040.064	44.4	1.7	46.1	54.0	7.9	Complied
5150.000	42.6	1.7	44.3	54.0	9.7	Complied

Results: Upper Band Edge / Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	44.8	1.8	46.6	54.0	7.4	Complied
5396.152	45.1	1.8	46.9	54.0	7.1	Complied

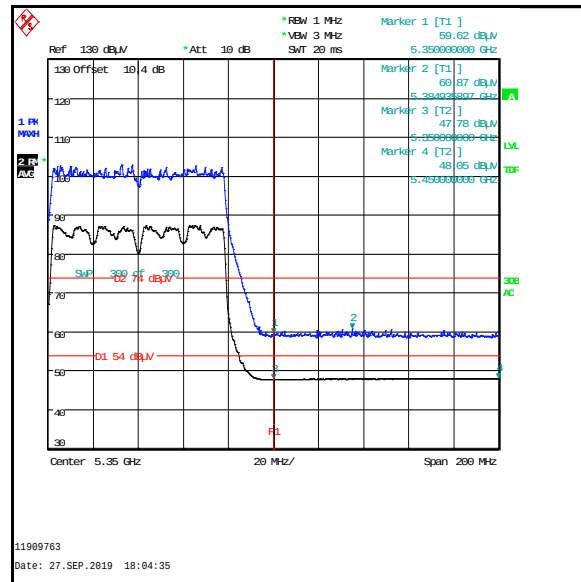
**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 802.11ac / 80 MHz / MIMO / 4Tx CDD / 16-QAM / MCS3x1 / Port 1, 2, 3 & 4****Results: Upper Band Edge / Peak**

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	59.6	74.0	14.4	Complied
5384.936	60.9	74.0	13.1	Complied

Results: Upper Band Edge / Average

Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5350.000	47.8	3.0	50.8	54.0	3.2	Complied
5450.000	48.1	3.0	51.1	54.0	2.9	Complied

**Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band)**5.3.2. 5.47-5.725 GHz band****Test Summary:**

Test Engineers:	John Ferdinand, Andrew Harding, Mark Perry & Mohammed Toubella	Test Dates:	19 September 2019 to 27 September 2019
Test Sample Serial Number:	2405066 & 2428534		

FCC Reference:	Parts 15.407(b)(3),(7), 15.205 & 15.209(a)
Test Method Used:	ANSI C63.10 Section 6.10 & KDB 789033 II.G.

Environmental Conditions:

Temperature (°C):	21 to 24
Relative Humidity (%):	41 to 52

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Note(s):**

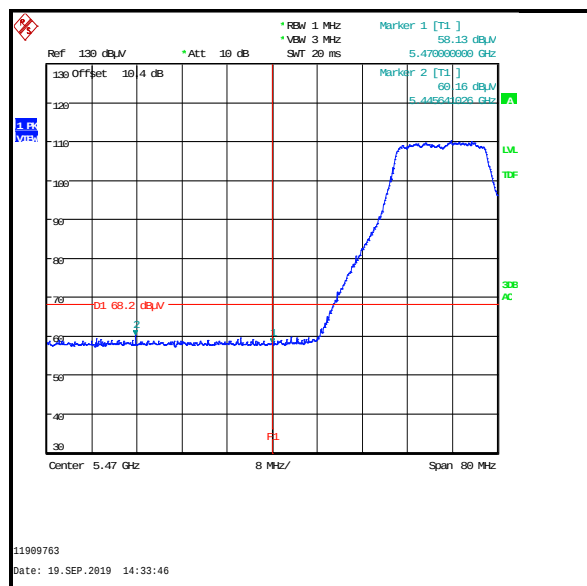
1. Measurements were performed in the EUT modes that produced the highest power and the widest bandwidths as these were deemed to be the worst case modes. The modes that produced the highest power and widest bandwidth were:
 - o 802.11a SISO – 64-QAM / 48 Mbps / Port 1
 - o 802.11n HT20 SISO – 64-QAM / MCS6 / Port 1
 - o 802.11n HT40 SISO – 16-QAM / MCS4 / Port 1
 - o 802.11ac VHT80 SISO – QPSK / MCS1x1 / Port 1
 - o 802.11ac VHT80 SISO – 256-QAM / MCS8x1 / Port 1
 - o 802.11a MIMO – 64-QAM / 54 Mbps / 2Tx CDD / Ports 1 & 2
 - o 802.11n HT20 MIMO – BPSK / MCS0 / 2Tx CDD / Ports 1 & 2
 - o 802.11n HT40 MIMO – 64-QAM / MCS7 / 2Tx CDD / Ports 1 & 2
 - o 802.11ac VHT80 MIMO – 64-QAM / MCS5x1 / 2Tx CDD / Ports 1 & 2
 - o 802.11ac VHT80 MIMO – 256-QAM / MCS9x1 / 2Tx CDD / Ports 1 & 2
 - o 802.11a MIMO – BPSK / 9 Mbps / 3Tx CDD / Ports 1, 2 & 3
 - o 802.11n HT20 MIMO – 16-QAM / MCS3 / 3Tx CDD / Ports 1, 2 & 3
 - o 802.11n HT20 MIMO – 64-QAM / MCS7 / 3Tx CDD / Ports 1, 2 & 3
 - o 802.11n HT40 MIMO – 64-QAM / MCS5 / 3Tx CDD / Ports 1, 2 & 3
 - o 802.11ac VHT80 MIMO – QPSK / MCS1x1 / 3Tx CDD / Ports 1, 2 & 3
 - o 802.11a MIMO – QPSK / 12 Mbps / 4Tx CDD / Ports 1, 2, 3 & 4
 - o 802.11n HT20 MIMO – QPSK / MCS1 / 4Tx CDD / Ports 1, 2, 3 & 4
 - o 802.11n HT40 MIMO – 16-QAM / MCS3 / 4Tx CDD / Ports 1, 2, 3 & 4
 - o 802.11ac VHT80 MIMO – 16-QAM / MCS3x1 / 4Tx CDD / Ports 1, 2, 3 & 4
2. Lower band edge measurements were performed with the EUT transmitting on the bottom channel. Upper band edge measurements were performed with the EUT transmitting on the top channel.
3. For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz. However, there are restricted bands of operation below the lower band edge at 4.5-5.15 GHz and also at 5.35-5.46 GHz therefore the provisions of FCC Part 15.205 apply. Tests were performed in these restricted bands of operation with the EUT transmitting on the bottom and top channels within 5.47-5.725 GHz band.
4. For completeness, results are shown as EIRP in dBm and also as field strength in dBμV/m. Measured field strength was converted to EIRP in accordance with KDB 789033 II.G.2.c)(iii) using a conversion factor of 95.2.

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)

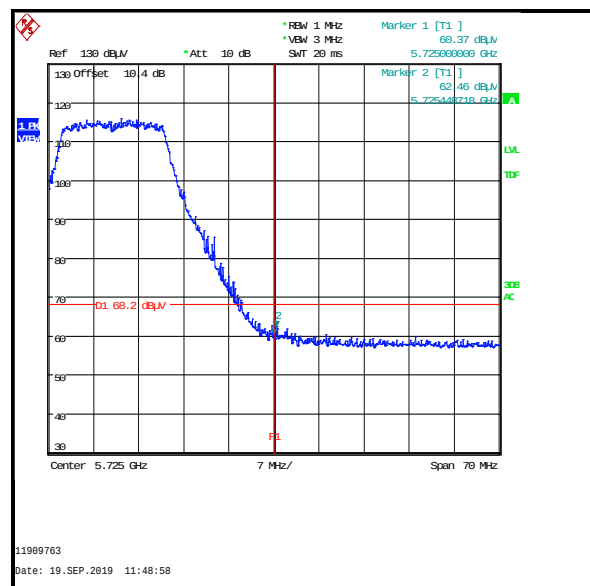
Results: 802.11a / 20 MHz / SISO / 64-QAM / 48 Mbps / Port 1 / Peak

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5445.641	-35.0	-27.0	8.0	Complied
5470	-37.1	-27.0	10.1	Complied
5725	-34.8	-27.0	7.8	Complied
5725.449	-34.7	-27.0	7.7	Complied

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5445.641	60.2	68.2	8.0	Complied
5470	58.1	68.2	10.1	Complied
5725	60.4	68.2	7.8	Complied
5725.449	62.5	68.2	7.7	Complied



Lower Band Edge

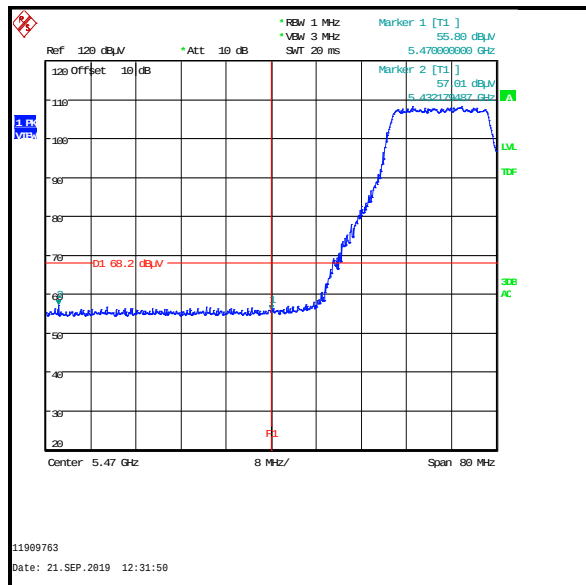
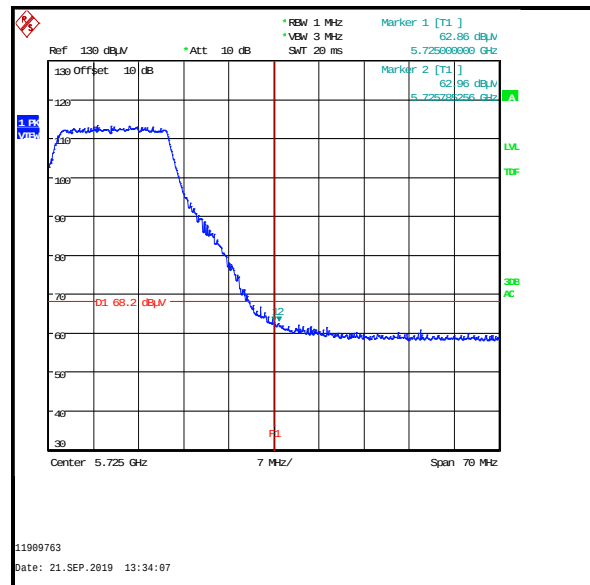


Upper Band Edge

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: 802.11n / 20 MHz / SISO / 64-QAM / MCS6 / Port 1 / Peak**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5432.180	-38.2	-27.0	11.2	Complied
5470.000	-39.4	-27.0	12.4	Complied
5725.000	-32.3	-27.0	5.3	Complied
5725.785	-32.2	-27.0	5.2	Complied

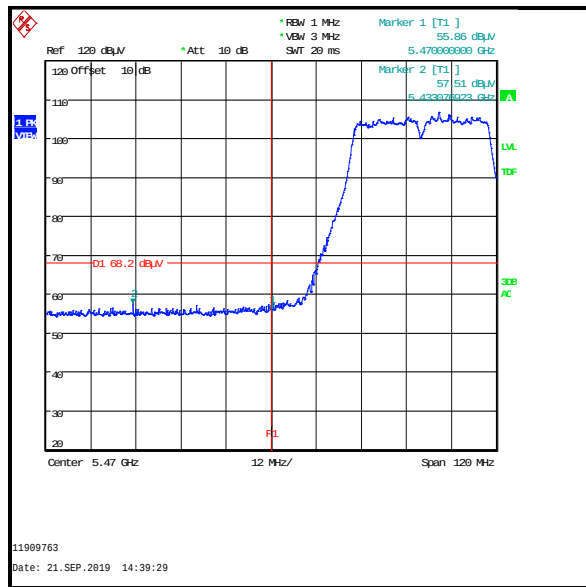
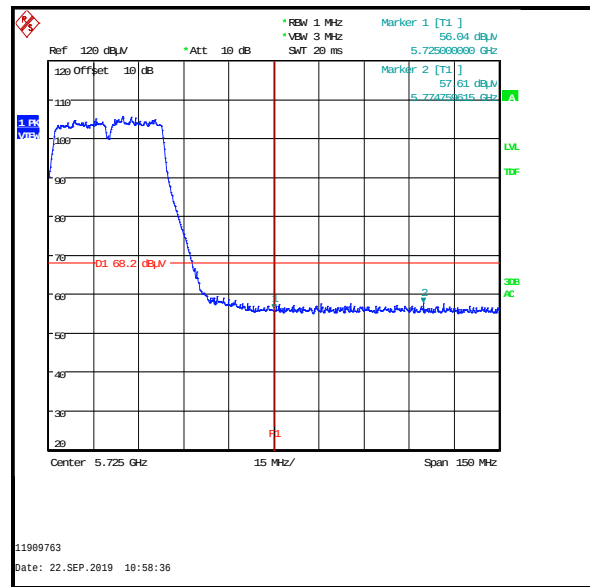
Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5432.180	57.0	68.2	11.2	Complied
5470.000	55.8	68.2	12.4	Complied
5725.000	62.9	68.2	5.3	Complied
5725.785	63.0	68.2	5.2	Complied

**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: 802.11n / 40 MHz / SISO / 16-QAM / MCS4 / Port 1 / Peak**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5433.077	-37.7	-27.0	10.7	Complied
5470.000	-39.3	-27.0	12.3	Complied
5725.000	-39.2	-27.0	12.2	Complied
5774.760	-37.6	-27.0	10.6	Complied

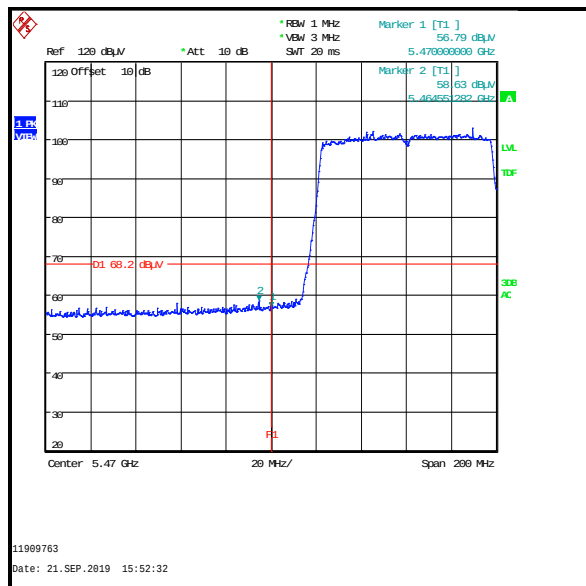
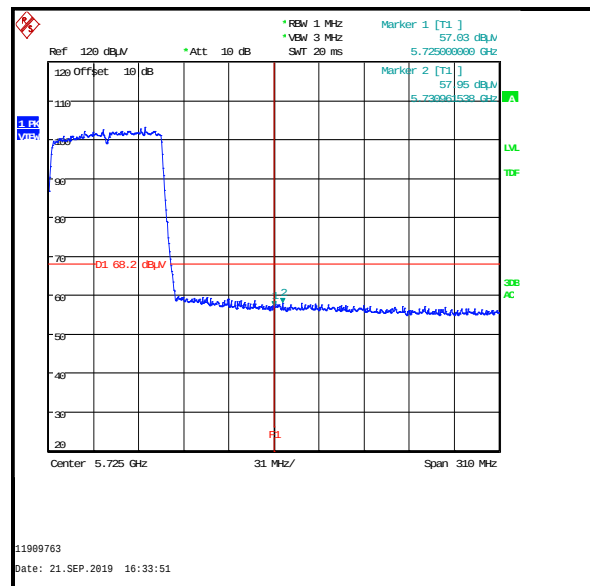
Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5433.077	57.5	68.2	10.7	Complied
5470.000	55.9	68.2	12.3	Complied
5725.000	56.0	68.2	12.2	Complied
5774.760	57.6	68.2	10.6	Complied

**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: 802.11ac / 80 MHz / SISO / QPSK / MCS1x1 / Port 1 / Peak**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5464.551	-36.6	-27.0	9.6	Complied
5470.000	-38.4	-27.0	9.4	Complied
5725.000	-38.2	-27.0	11.2	Complied
5730.962	-37.2	-27.0	10.2	Complied

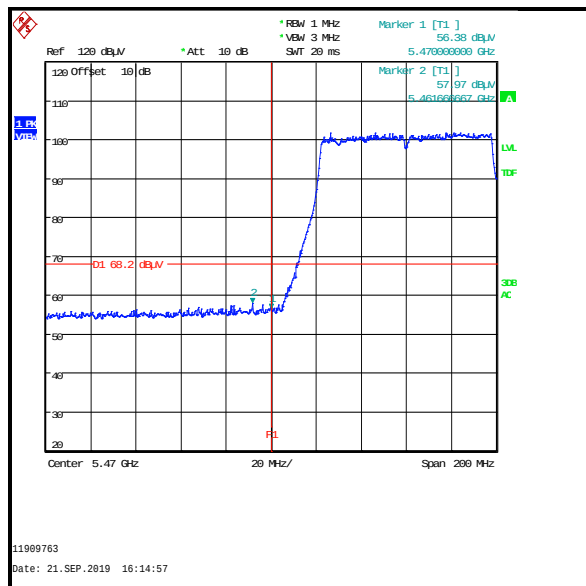
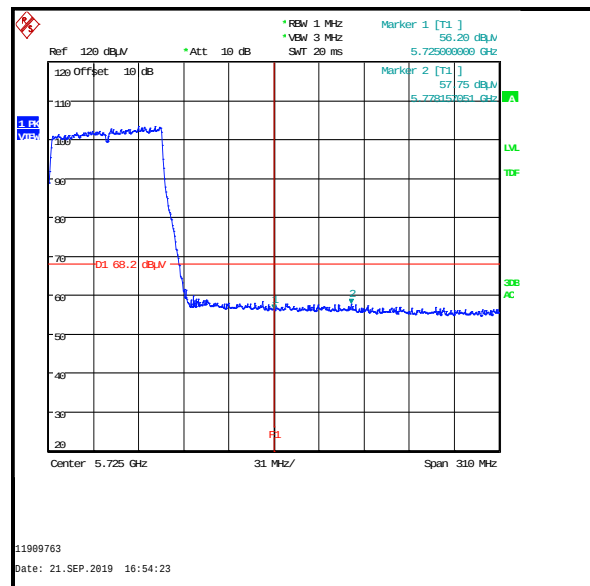
Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5464.551	58.6	68.2	9.6	Complied
5470.000	56.8	68.2	9.4	Complied
5725.000	57.0	68.2	11.2	Complied
5730.962	58.0	68.2	10.2	Complied

**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: 802.11ac / 80 MHz / SISO / 256-QAM / MCS8x1 / Port 1 / Peak**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5461.667	-37.2	-27.0	10.2	Complied
5470.000	-38.8	-27.0	11.8	Complied
5725.000	-39.0	-27.0	12.0	Complied
5778.157	-37.4	-27.0	10.4	Complied

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5461.667	58.0	68.2	10.2	Complied
5470.000	56.4	68.2	11.8	Complied
5725.000	56.2	68.2	12.0	Complied
5778.157	57.8	68.2	10.4	Complied

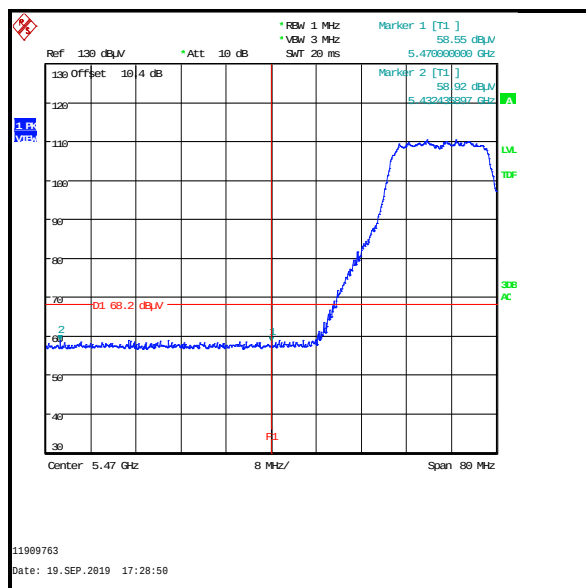
**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)

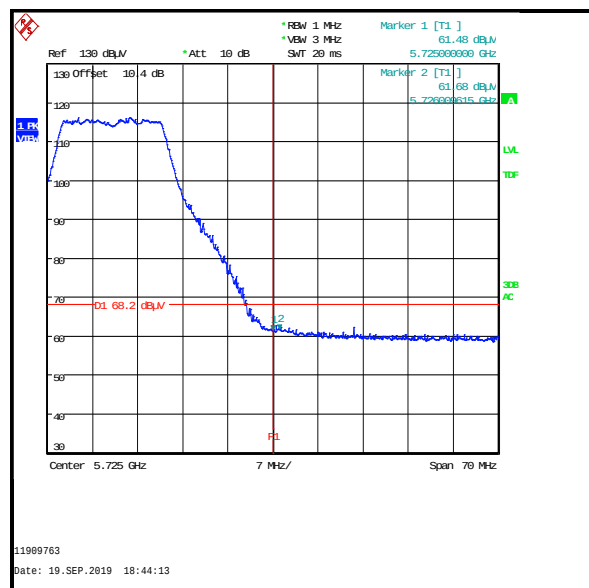
Results: 802.11a / 20 MHz / MIMO / 2Tx CDD / 64-QAM / 54 Mbps / Port 1 & 2 / Peak

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5432.436	-36.3	-27.0	9.3	Complied
5470.000	-36.6	-27.0	9.6	Complied
5725.000	-33.7	-27.0	6.7	Complied
5726.006	-33.5	-27.0	6.5	Complied

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5432.436	58.9	68.2	9.3	Complied
5470.000	58.6	68.2	9.6	Complied
5725.000	61.5	68.2	6.7	Complied
5726.006	61.7	68.2	6.5	Complied



Lower Band Edge

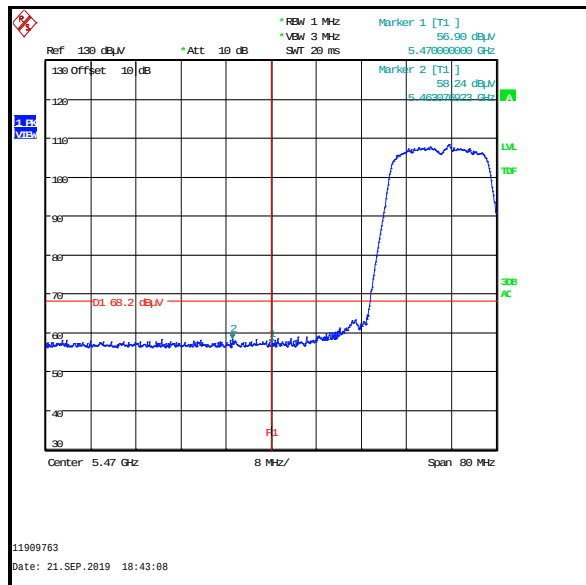
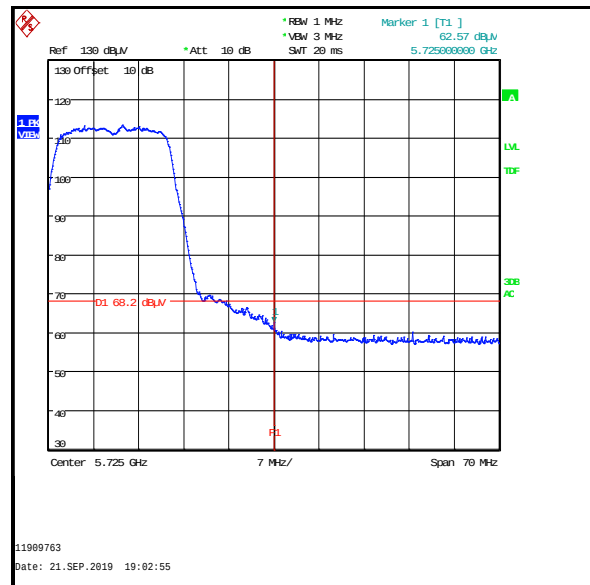


Upper Band Edge

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: 802.11n / 20 MHz / MIMO / 2Tx CDD / BPSK / MCS0 / Port 1 & 2 / Peak**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5463.077	-37.0	-27.0	10.0	Complied
5470.000	-38.3	-27.0	11.3	Complied
5725.000	-32.6	-27.0	6.0	Complied

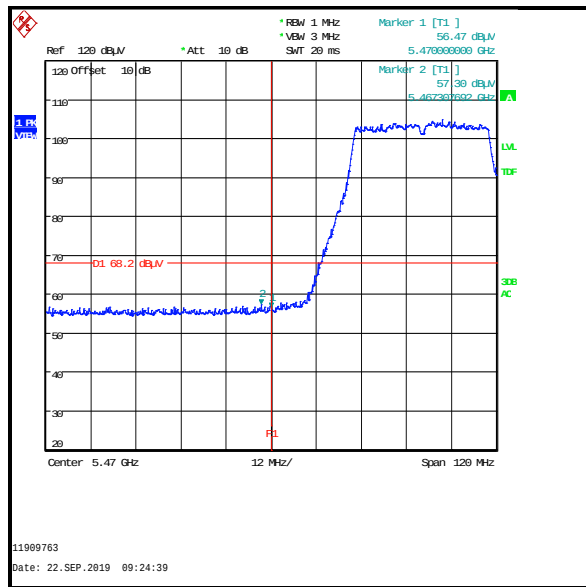
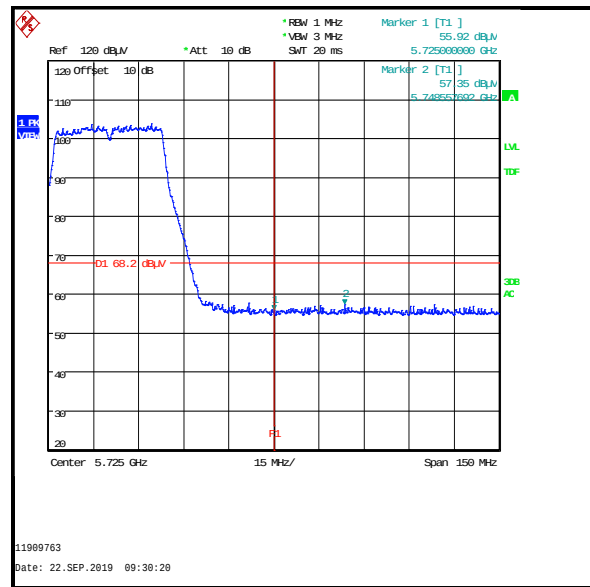
Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5463.077	58.2	68.2	10.0	Complied
5470.000	56.9	68.2	11.3	Complied
5725.000	62.6	68.2	6.0	Complied

**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: 802.11n / 40 MHz / MIMO / 2Tx CDD / 64-QAM / MCS7 / Port 1 & 2 / Peak**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5467.308	-37.9	-27.0	10.9	Complied
5470.000	-38.7	-27.0	11.7	Complied
5725.000	-39.3	-27.0	12.3	Complied
5748.858	-37.8	-27.0	10.8	Complied

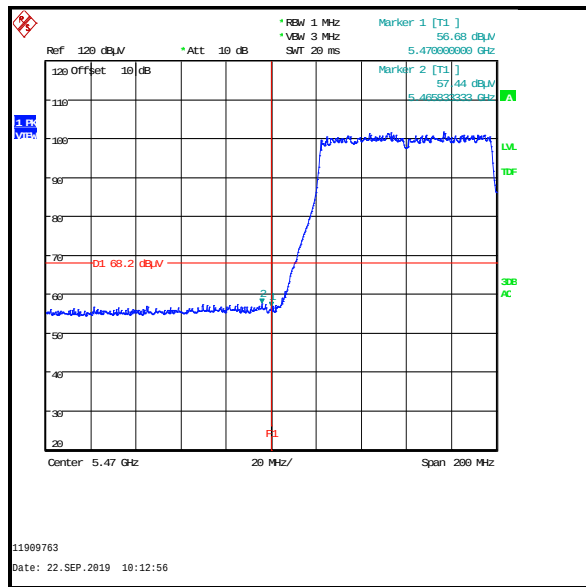
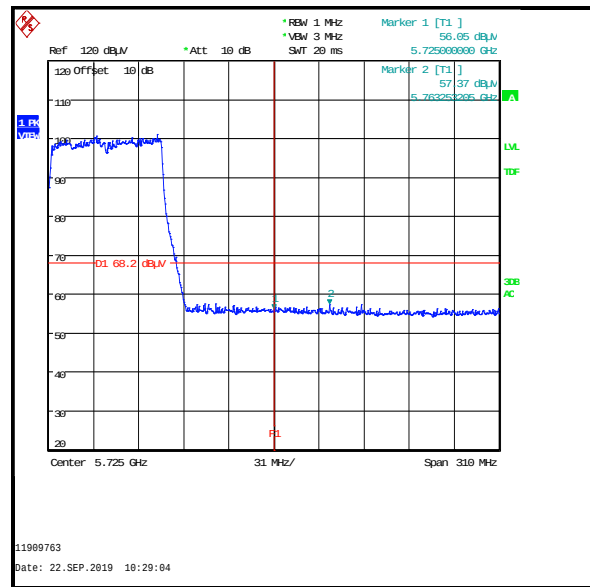
Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5467.308	57.3	68.2	10.9	Complied
5470.000	56.5	68.2	11.7	Complied
5725.000	55.9	68.2	12.3	Complied
5748.858	57.4	68.2	10.8	Complied

**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: 802.11ac / 80 MHz / MIMO / 2Tx CDD / 64-QAM / MCS5x1 / Port 1 & 2 / Peak**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5465.833	-37.8	-27.0	10.8	Complied
5470.000	-38.5	-27.0	11.5	Complied
5725.000	-39.1	-27.0	12.1	Complied
5763.253	-37.8	-27.0	10.8	Complied

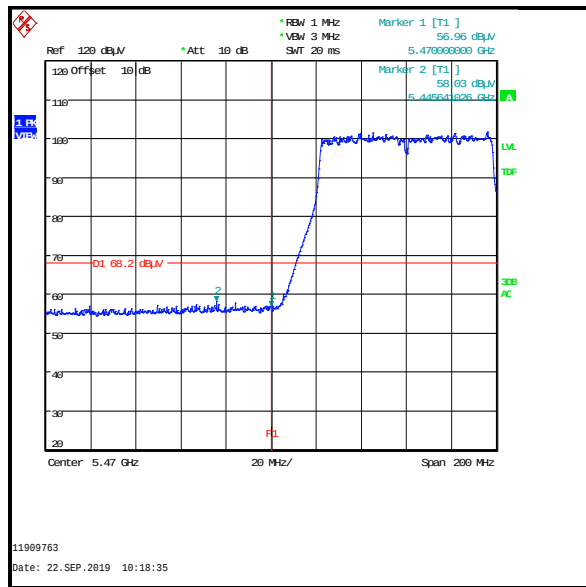
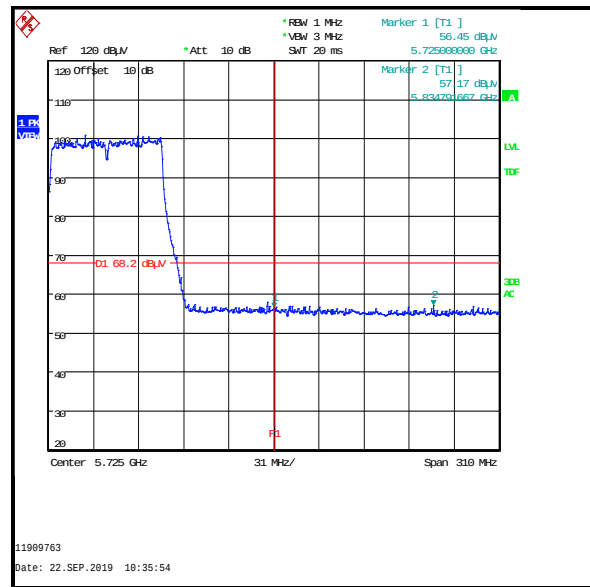
Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5465.833	57.4	68.2	10.8	Complied
5470.000	56.7	68.2	11.5	Complied
5725.000	56.1	68.2	12.1	Complied
5763.253	57.4	68.2	10.8	Complied

**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: 802.11ac / 80 MHz / MIMO / 2Tx CDD / 256-QAM / MCS9x1 / Port 1 & 2 / Peak**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5445.641	-37.2	-27.0	10.2	Complied
5470.000	-38.2	-27.0	11.2	Complied
5725.000	-38.7	-27.0	11.7	Complied
5834.792	-38.0	-27.0	11.0	Complied

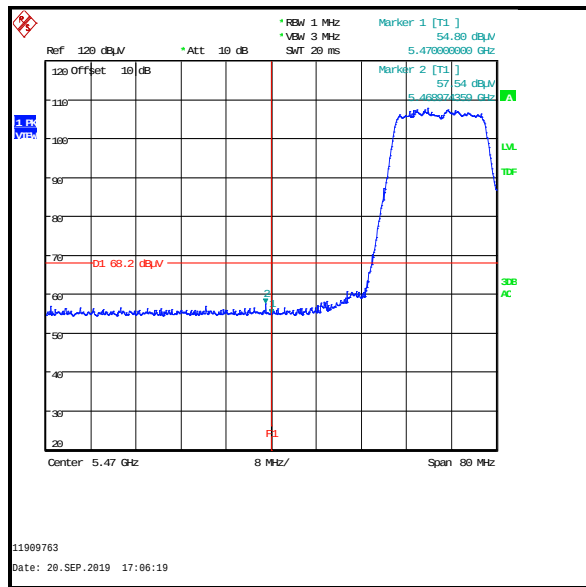
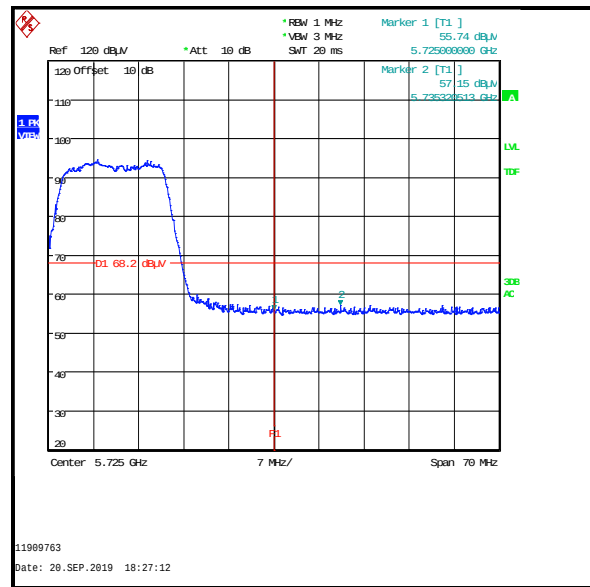
Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5445.641	58.0	68.2	10.2	Complied
5470.000	57.0	68.2	11.2	Complied
5725.000	56.5	68.2	11.7	Complied
5834.792	57.2	68.2	11.0	Complied

**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: 802.11a / 20 MHz / MIMO / 3Tx CDD / BPSK / 9 Mbps / Port 1, 2 & 3 / Peak**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5468.975	-37.7	-27.0	10.7	Complied
5470.000	-40.4	-27.0	13.4	Complied
5725.000	-39.5	-27.0	12.5	Complied
5735.321	-38.0	-27.0	11.0	Complied

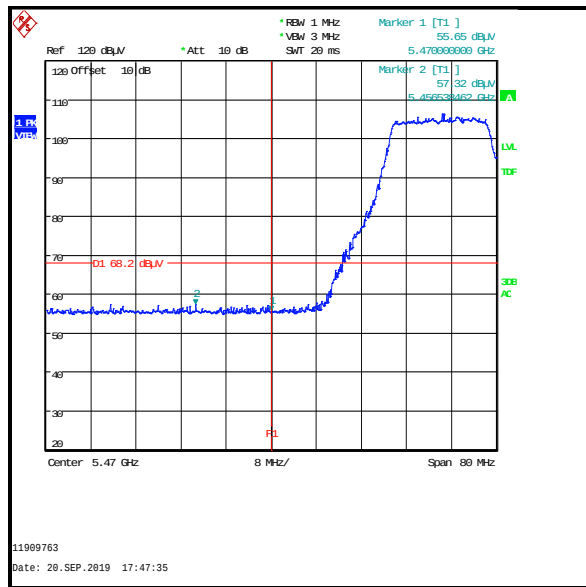
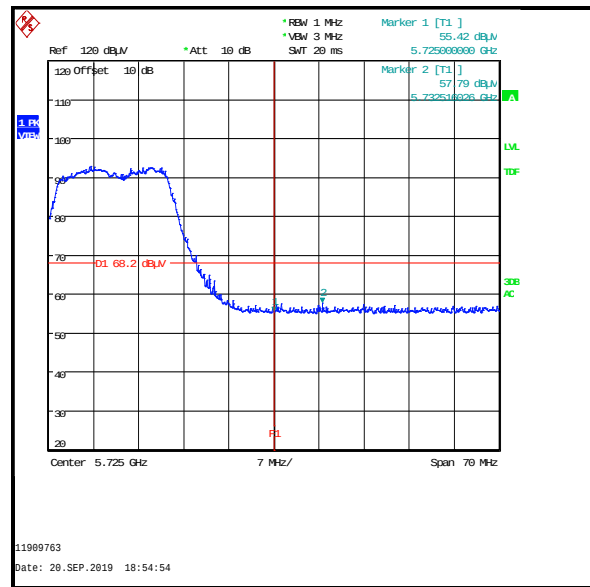
Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5468.975	57.5	68.2	10.7	Complied
5470.000	54.8	68.2	13.4	Complied
5725.000	55.7	68.2	12.5	Complied
5735.321	57.2	68.2	11.0	Complied

**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: 802.11n / 20 MHz / MIMO / 3Tx CDD / 16-QAM / MCS3 / Port 1, 2 & 3 / Peak**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5456.654	-37.9	-27.0	10.9	Complied
5470.000	-39.5	-27.0	12.5	Complied
5725.000	-39.8	-27.0	12.8	Complied
5732.516	-37.4	-27.0	10.4	Complied

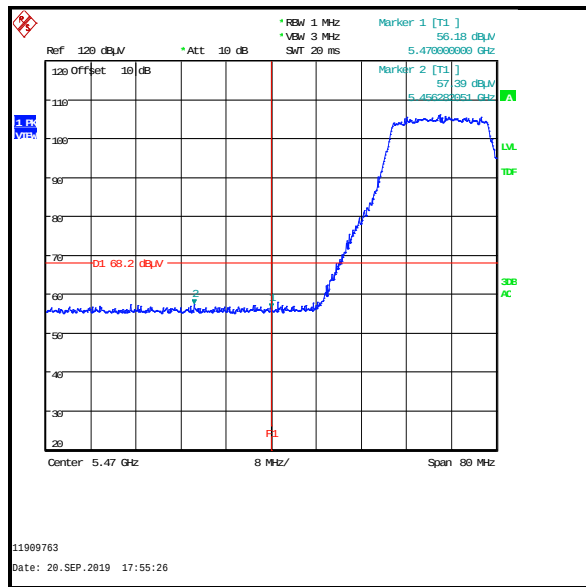
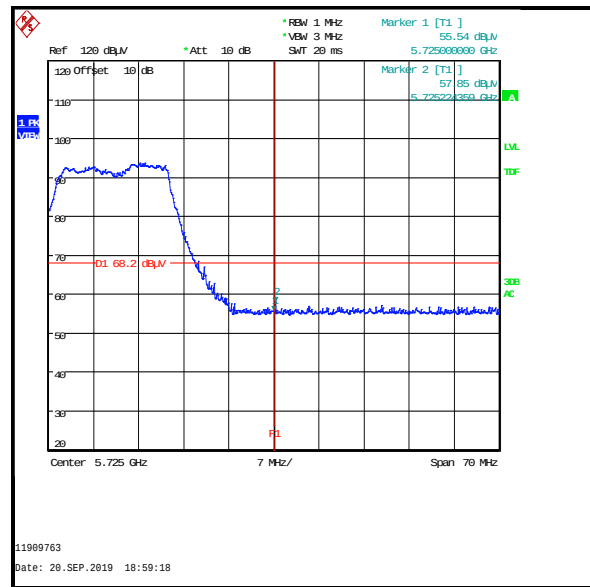
Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5456.654	57.3	68.2	10.9	Complied
5470.000	55.7	68.2	12.5	Complied
5725.000	55.4	68.2	12.8	Complied
5732.516	57.8	68.2	10.4	Complied

**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: 802.11n / 20 MHz / MIMO / 3Tx CDD / 64-QAM / MCS7 / Port 1, 2 & 3 / Peak**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5456.282	-37.8	-27.0	10.8	Complied
5470.000	-39.0	-27.0	12.0	Complied
5725.000	-39.7	-27.0	12.7	Complied
5725.224	-37.3	-27.0	10.3	Complied

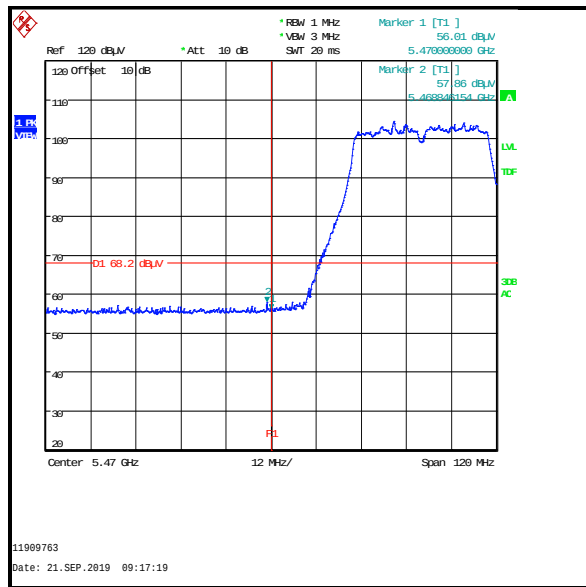
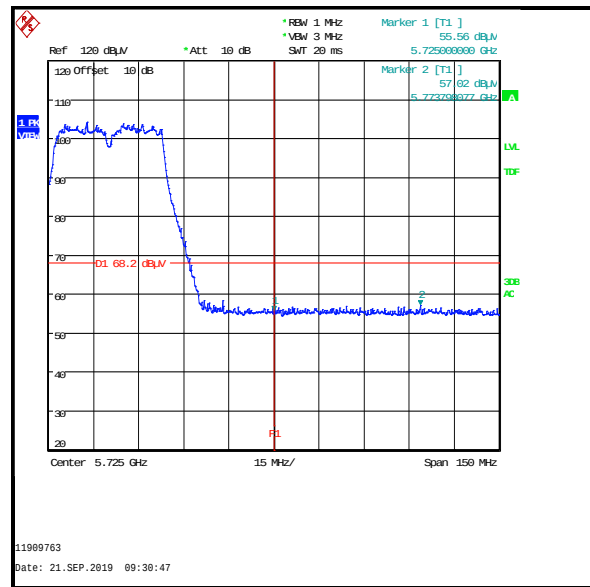
Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5456.282	57.4	68.2	10.8	Complied
5470.000	56.2	68.2	12.0	Complied
5725.000	55.5	68.2	12.7	Complied
5725.224	57.9	68.2	10.3	Complied

**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: 802.11n / 40 MHz / MIMO / 3Tx CDD / 64-QAM / MCS5 / Port 1, 2 & 3 / Peak**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5468.846	-37.3	-27.0	10.3	Complied
5470.000	-39.2	-27.0	12.2	Complied
5725.000	-39.6	-27.0	12.6	Complied
5773.798	-38.2	-27.0	11.2	Complied

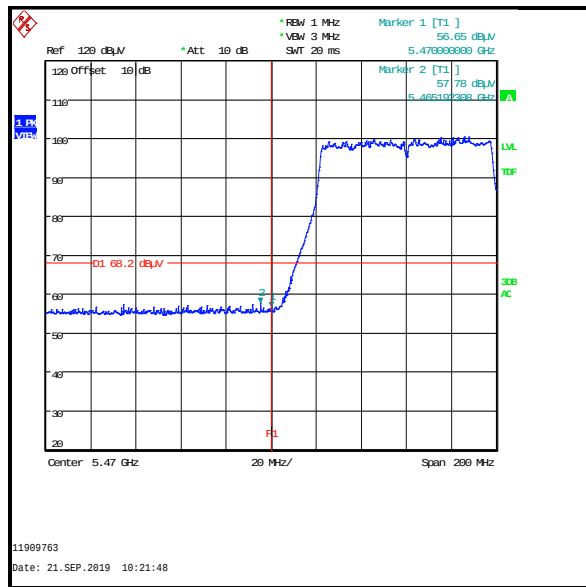
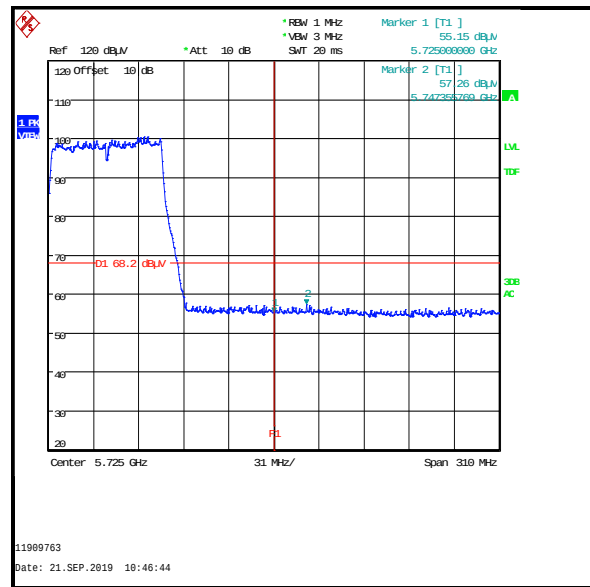
Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5468.846	57.9	68.2	10.3	Complied
5470.000	56.0	68.2	12.2	Complied
5725.000	55.6	68.2	12.6	Complied
5773.798	57.0	68.2	11.2	Complied

**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: 802.11ac / 80 MHz / MIMO / 3Tx CDD / QPSK / MCS1x1 / Port 1, 2 & 3 / Peak**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5465.192	-37.4	-27.0	10.4	Complied
5470.000	-38.5	-27.0	11.5	Complied
5725.000	-40.0	-27.0	13.0	Complied
5747.356	-37.9	-27.0	10.9	Complied

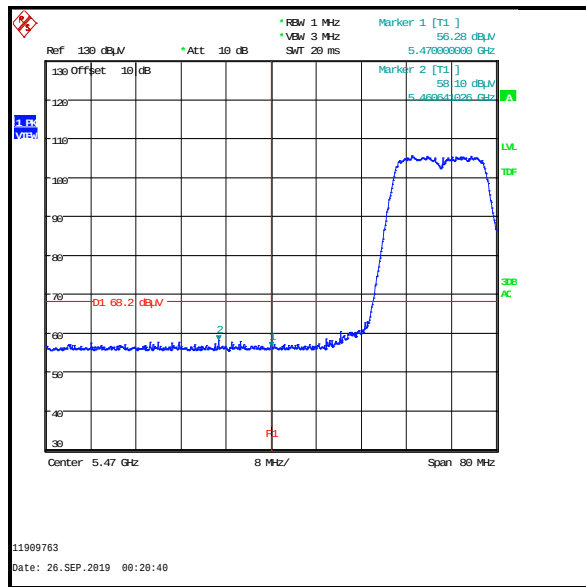
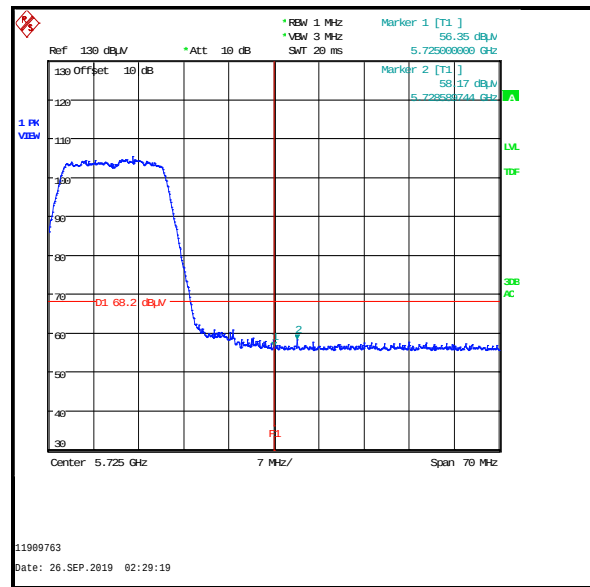
Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5465.192	57.8	68.2	10.4	Complied
5470.000	56.7	68.2	11.5	Complied
5725.000	55.2	68.2	13.0	Complied
5747.356	57.3	68.2	10.9	Complied

**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (GHz band operation) (continued)**Results: 802.11a / 20 MHz / MIMO / 4Tx CDD / QPSK / 12 Mbps / Port 1, 2, 3 & 4 / Peak**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5460.641	-37.1	-27.0	10.1	Complied
5470.000	-38.9	-27.0	11.9	Complied
5725.000	-38.8	-27.0	11.8	Complied
5728.586	-37.0	-27.0	10.0	Complied

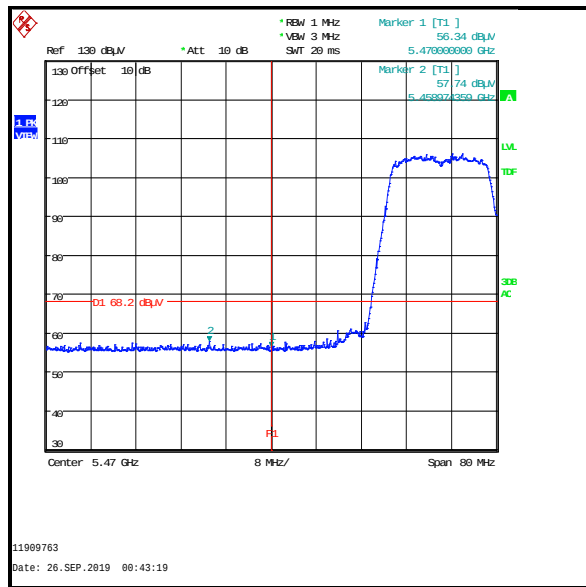
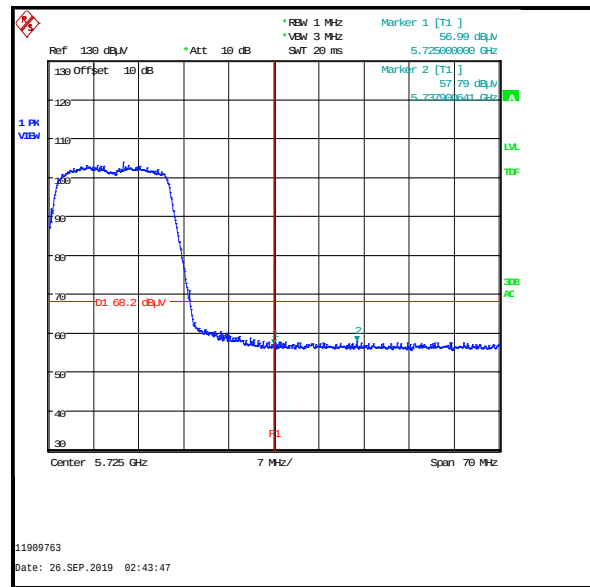
Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5460.641	58.1	68.2	10.1	Complied
5470.000	56.3	68.2	11.9	Complied
5725.000	56.4	68.2	11.8	Complied
5728.586	58.2	68.2	10.0	Complied

**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: 802.11n / 20 MHz / MIMO / 4Tx CDD / QPSK / MCS1 / Port 1, 2, 3 & 4 / Peak**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5458.974	-37.5	-27.0	10.5	Complied
5470.000	-38.9	-27.0	11.9	Complied
5725.000	-38.2	-27.0	11.2	Complied
5737.901	-37.4	-27.0	10.4	Complied

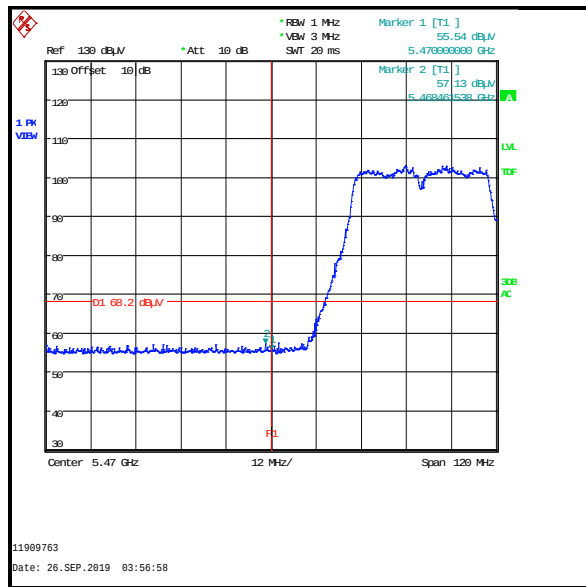
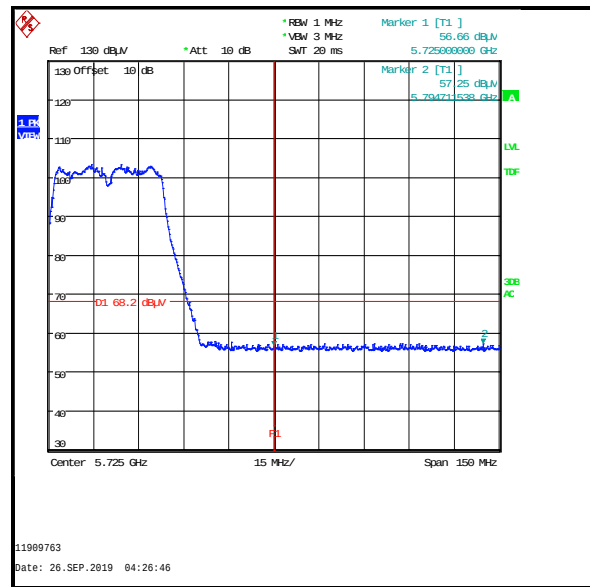
Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5458.974	57.7	68.2	10.5	Complied
5470.000	56.3	68.2	11.9	Complied
5725.000	57.0	68.2	11.2	Complied
5737.901	57.8	68.2	10.4	Complied

**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: 802.11n / 40 MHz / MIMO / 4Tx CDD / 16-QAM / MCS3 / Port 1, 2, 3 & 4 / Peak**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5468.462	-38.1	-27.0	11.1	Complied
5470.000	-39.7	-27.0	12.7	Complied
5725.000	-38.5	-27.0	11.5	Complied
5794.712	-37.9	-27.0	10.9	Complied

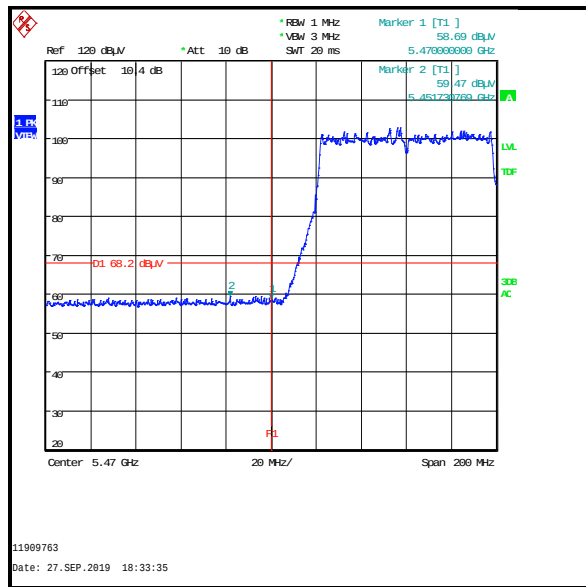
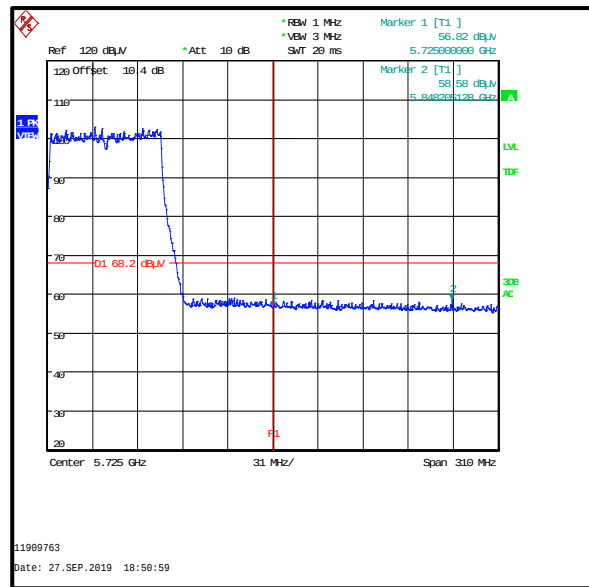
Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5468.462	57.1	68.2	11.1	Complied
5470.000	55.5	68.2	12.7	Complied
5725.000	56.7	68.2	11.5	Complied
5794.712	57.3	68.2	10.9	Complied

**Lower Band Edge****Upper Band Edge**

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: 802.11ac / 80 MHz / MIMO / 4Tx CDD / 16-QAM / MCS3x1 / Port 1, 2, 3 & 4 / Peak**

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5451.731	-35.7	-27.0	8.7	Complied
5470.000	-36.5	-27.0	9.5	Complied
5725.000	-38.4	-27.0	11.4	Complied
5848.205	-36.6	-27.0	9.6	Complied

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5451.731	59.5	68.2	8.7	Complied
5470.000	58.7	68.2	9.5	Complied
5725.000	56.8	68.2	11.4	Complied
5848.205	58.6	68.2	9.6	Complied

**Lower Band Edge****Upper Band Edge**

Appendix 1

Directional Antenna Gain Calculations – 2Tx CDD / Output Power Measurements

For 2Tx CDD modes, in accordance with KDB 662911 D01 v02r01 Section F)2)f)(ii) directional antenna gain was calculated using the formula applicable to equal antenna gains. G_{ANT} was set equal to the gain of the antenna having the highest gain. In accordance with KDB 662911 D01 v02r01 Section F)2)f)(i) and for $N_{ANT}=2$:

$$Directional\ gain = G_{ANT} + Array\ Gain = 14.2\ dBi + 0\ dB = 14.2\ dBi$$

Directional Antenna Gain Calculations – 3Tx CDD / Output Power Measurements

For 3Tx CDD modes, in accordance with KDB 662911 D01 v02r01 Section F)2)f)(ii) directional antenna gain was calculated using the formula applicable to equal antenna gains. G_{ANT} was set equal to the gain of the antenna having the highest gain. In accordance with KDB 662911 D01 v02r01 Section F)2)f)(i) and for $N_{ANT}=3$:

$$Directional\ gain = G_{ANT} + Array\ Gain = 14.2\ dBi + 0\ dB = 14.2\ dBi$$

Directional Antenna Gain Calculations – 4Tx CDD / Output Power Measurements

For 4Tx CDD modes, in accordance with KDB 662911 D01 v02r01 Section F)2)f)(ii) directional antenna gain was calculated using the formula applicable to equal antenna gains. G_{ANT} was set equal to the gain of the antenna having the highest gain. In accordance with KDB 662911 D01 v02r01 Section F)2)f)(i) and for $N_{ANT}=4$:

$$Directional\ gain = G_{ANT} + Array\ Gain = 14.2\ dBi + 0\ dB = 14.2\ dBi$$

Appendix 1 (continued)**Directional Antenna Gain Calculations – 2Tx CDD / PSD Measurements**

For 2Tx CDD modes, in accordance with KDB 662911 D01 v02r01 Section F)2)f)(ii) and for $N_{SS}=1$, $N_{ANT}=2$, $G_1 = G_{ANTENNA\ 1} = 14.2$ dBi, $G_2 = G_{ANTENNA\ 2} = 14.2$ dBi:

$$\begin{aligned} \text{Directional Gain} &= 10 \log \left[\frac{\sum_{j=1}^{N_{SS}} \left(\sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right] = 10 \log \left[\frac{\sum_{j=1}^1 \left(\sum_{k=1}^2 g_{j,k} \right)^2}{2} \right] \\ &= 10 \log \left[\frac{(g_{1,1} + g_{1,2})^2}{2} \right] = 10 \log \left[\frac{\left(10^{\frac{G_1}{20}} + 10^{\frac{G_2}{20}} \right)^2}{2} \right] = 10 \log \left[\frac{\left(10^{\frac{14.2}{20}} + 10^{\frac{14.2}{20}} \right)^2}{2} \right] = 17.2 \text{ dBi} \end{aligned}$$

Directional Antenna Gain Calculations – 3Tx CDD / PSD Measurements

For 3Tx CDD modes, in accordance with KDB 662911 D01 v02r01 Section F)2)f)(ii) and for $N_{SS}=1$, $N_{ANT}=3$, $G_1 = G_{ANTENNA\ 1} = 14.2$ dBi, $G_2 = G_{ANTENNA\ 2} = 14.2$ dBi, $G_{ANTENNA\ 3} = 14.2$ dBi:

$$\begin{aligned} \text{Directional Gain} &= 10 \log \left[\frac{\sum_{j=1}^{N_{SS}} \left(\sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right] = 10 \log \left[\frac{\sum_{j=1}^1 \left(\sum_{k=1}^3 g_{j,k} \right)^2}{3} \right] \\ &= 10 \log \left[\frac{(g_{1,1} + g_{1,2} + g_{1,3})^2}{3} \right] = 10 \log \left[\frac{\left(10^{\frac{G_1}{20}} + 10^{\frac{G_2}{20}} + 10^{\frac{G_3}{20}} \right)^2}{3} \right] \\ &= 10 \log \left[\frac{\left(10^{\frac{14.2}{20}} + 10^{\frac{14.2}{20}} + 10^{\frac{14.2}{20}} \right)^2}{3} \right] = 19.0 \text{ dBi} \end{aligned}$$

Directional Antenna Gain Calculations – 4Tx CDD / PSD Measurements

For 4Tx CDD modes, in accordance with KDB 662911 D01 v02r01 Section F)2)f)(ii) and for $N_{SS}=1$, $N_{ANT}=4$, $G_1 = G_{ANTENNA\ 1} = 14.2$ dBi, $G_2 = G_{ANTENNA\ 2} = 14.2$ dBi, $G_{ANTENNA\ 3} = 14.2$ dBi, $G_{ANTENNA\ 4} = 14.2$ dBi:

$$\begin{aligned} \text{Directional Gain} &= 10 \log \left[\frac{\sum_{j=1}^{N_{SS}} \left(\sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right] = 10 \log \left[\frac{\sum_{j=1}^1 \left(\sum_{k=1}^4 g_{j,k} \right)^2}{4} \right] \\ &= 10 \log \left[\frac{(g_{1,1} + g_{1,2} + g_{1,3} + g_{1,4})^2}{4} \right] = 10 \log \left[\frac{\left(10^{\frac{G_1}{20}} + 10^{\frac{G_2}{20}} + 10^{\frac{G_3}{20}} + 10^{\frac{G_4}{20}} \right)^2}{4} \right] \\ &= 10 \log \left[\frac{\left(10^{\frac{14.2}{20}} + 10^{\frac{14.2}{20}} + 10^{\frac{14.2}{20}} + 10^{\frac{14.2}{20}} \right)^2}{4} \right] = 20.2 \text{ dBi} \end{aligned}$$

--- END OF REPORT ---