



TEST REPORT

Test Report No. : UL-RPT-RP-11909763-3216-FCC-UNII1

Applicant : SIEMENS AG
Model No. : MPCIE-R1-ABGNAC-U4
FCC ID : LYHRAPACV1
Technology : WLAN 5 GHz
Test Standard(s) : FCC Parts 15.207, 15.209(a) & 15.407

For details of applied tests refer to test result summary

1. This test report shall not be reproduced in full or partial, without the written approval of UL International Germany GmbH.
2. The results in this report apply only to the sample tested.
3. The test results in this report are traceable to the national or international standards.
4. Test Report Version 1.0
5. Result of the tested sample: **PASS**

Prepared by: Krume, Ivanov
Title: Laboratory Engineer
Date: 16 January 2020

Approved by: Ajit, Phadtare
Title: Lead Test Engineer
Date: 16 January 2020



Deutsche
Akkreditierungsstelle
D-PL-19381-02-00

This laboratory is accredited by DAkkS.
The tests reported herein have been performed in
accordance with its' terms of accreditation.

This page has been left intentionally blank.

Table of Contents

1. Customer Information	4
1.1. Applicant Information	4
1.2. Manufacturer Information	4
2. Summary of Testing	5
2.1. General Information	5
Applied Standards	5
Location	5
Date information	5
2.2. Summary of Test Results	6
2.3. Methods and Procedures	6
2.4. Deviations from the Test Specification	6
3. Equipment Under Test (EUT)	7
3.1. Identification of Equipment Under Test (EUT)	7
3.2. Description of EUT	7
3.3. Modifications Incorporated in the EUT	7
3.4. Additional Information Related to Testing	8
3.5. Antenna Information	9
3.6. Support Equipment	10
A. Support Equipment (In-house)	10
B. Support Equipment (Manufacturer supplied)	10
4. Operation and Monitoring of the EUT during Testing	11
4.1. Operating Modes	11
4.2. Configuration and Peripherals	12
4.3. Used Power Settings & Port Terminations	13
4.4. Used RF Cables	16
5. Measurements, Examinations and Derived Results	17
5.1. General Comments	17
5.2. Test Results	18
5.2.1. Transmitter AC Conducted Spurious Emissions	18
5.2.2. Transmitter 26 dB Emission Bandwidth	38
5.2.3. Transmitter Duty Cycle	67
5.2.4. Transmitter Maximum Conducted Output Power	75
5.2.5. Transmitter Maximum Power Spectral Density	338
5.2.6. Transmitter Cabinet Radiated Emissions	592
5.2.7. Transmitter Conducted Spurious Emissions	610
5.2.8. Transmitter Band Edge Radiated Emissions	635
6. Measurement Uncertainty	826
7. Used equipment	827
8. Report Revision History	828

1. Customer Information

1.1.Applicant Information

Company Name:	SIEMENS AG
Company Address:	Östliche Rheinbrückenstr. 50, 76187 Karlsruhe, Germany
Contact Person:	Dr. Malgorzata Janson
Contact E-Mail Address:	malgorzata.janson@siemens.com
Contact Phone No.:	+ 49 721 595 2606

1.2.Manufacturer Information

Company Name:	SIEMENS AG
Company Address:	76181 Karlsruhe, Germany
Contact Person:	Mr. Kilian Löser
Contact E-Mail Address:	kilian.loeser@siemens.com
Contact Phone No.:	+49 911 895-5363

2. Summary of Testing

2.1. General Information

Applied Standards

Specification Reference:	47CFR15.407 and 47CFR15.403
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart E (Unlicensed National Information Infrastructure Devices) – Sections 15.403 and 15.407
Specification Reference:	47CFR15.207 and 47CFR15.209
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Sections 15.207 and 15.209
Test Firm Registration:	399704

Location

Location of Testing:	UL International Germany GmbH Hedelfinger Str. 61 70327 Stuttgart Germany
-----------------------------	--

Date information

Order Date:	26 September 2017
EUT arrived:	26 January 2018
Test Dates:	07 November 2018 to 21 October 2019
EUT returned:	-/-

2.2. Summary of Test Results

Clause	Measurement (5.15-5.25 GHz band)	Complied	Did not comply	Not performed	Not applicable
Part 15.207	Transmitter AC Conducted Emissions	☒	☐	☐	☐
Part 15.403(i)	Transmitter 26 dB Emission Bandwidth	☒	☐	☐	☐
Part 15.35(c)	Transmitter Duty Cycle	☒	☐	☐	☐
Part 15.407(a)(1)(iv)	Transmitter Maximum Conducted Output Power	☒	☐	☐	☐
Part 15.407(a)(1)(iv)	Transmitter Peak Power Spectral Density	☒	☐	☐	☐
Part 15.407(b)/15.209(a)	Transmitter Out of Band Radiated Emissions	☒	☐	☐	☐
Part 15.407(b)/15.209(a)	Transmitter Band Edge Radiated Emissions	☒	☐	☐	☐
Part 15.407(g)	Transmitter Frequency Stability (Temperature & Voltage Variation)	☐	☐	☐	☒
Part 15.407(h)(1)	Transmitter Power Control	☐	☐	☐	☒

Note:

- As per applicant's user manual Frequency stability is better than 20 ppm which ensures that the signal remains in the allocated bands under all operational conditions stated in the user manual.

2.3. Methods and Procedures

Reference:	ANSI C63.10-2013
Title:	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Reference:	KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 December 14, 2017
Title:	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E
Reference:	KDB 662911 D01 Multiple Transmitter Output v02r01 October 31, 2013
Title:	Emissions Testing of Transmitters with Multiple Outputs in the Same Band
Reference:	KDB 174176 D01 Line Conducted FAQ v01r01 June 3, 2015
Title:	AC Power-Line Conducted Emissions Frequently Asked Questions

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	SIEMENS
Model Name or Number:	MPCIE-R1-ABGNAC-U4
Model Type:	A5E36528526
Serial/ Fixed IP Number:	192.168.0.80 (Radiated Test Sample)
Hardware Version Number:	1
Software Version Number:	T01.00.00
FCC ID :	LYHRAPACV1

Brand Name:	SIEMENS
Model Name or Number:	MPCIE-R1-ABGNAC-U4
Model Type:	A5E36528526
Serial/ Fixed IP Number:	192.168.0.60 (Conducted Test Sample)
Hardware Version Number:	1
Software Version Number:	T01.00.00
FCC ID:	LYHRAPACV1

3.2. Description of EUT

The equipment under test was a 4 X 4 MIMO radio module supporting WLAN 2.4 GHz & WLAN 5 GHz technologies.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Technology Tested:	WLAN (IEEE 802.11a,n, ac)		
Type of Unit:	Transceiver		
Test Evaluation Board Power Supply Requirement(s):	Nominal	24.0 V DC	
	Minimum	16.8 V DC	
	Maximum	31.2 V DC	
EUT Power Supply Requirement(s):	Power Range	3.3 V DC ± 5 %	520 mA
	Power Range	5.0 V DC ± 5 %	700 mA
Supported Modulation Types:	BPSK, QPSK, 16QAM, 64QAM, 256QAM		
Supported Data rates:	802.11a	6, 9, 12, 18, 24, 36 ,48 & 54 Mbit/s (SISO or MIMO)	
	802.11n HT20	MCS0 to MCS7 (1 spatial stream) MCS8 to MCS15 (2 spatial streams) MCS16 to MCS23 (3 spatial streams) MCS24 to MCS31 (4 spatial streams)	
	802.11n HT40	MCS0 to MCS7 (1 spatial stream) MCS8 to MCS15 (2 spatial streams) MCS16 to MCS23 (3 spatial streams) MCS24 to MCS31 (4 spatial streams)	
	802.11ac HT20	MCS0 to MCS8 (up to 4 spatial streams)	
	802.11ac HT40	MCS0 to MCS9 (up to 4 spatial streams)	
	802.11ac HT80	MCS0 to MCS9 (up to 4 spatial streams)	
Antenna Gains:	Refer section 3.5 Antenna Information		
Maximum Conducted Output Power:	20 MHz	17.6 dBm	
	40 MHz	17.1 dBm	
	80 MHz	15.9 dBm	
Transceiver Frequency Band:	5150 MHz to 5250 MHz [U-NII-1 Band]		
Nominal Channel Bandwidth	20 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	36	5180
	Bottom +1	40	5200
	Middle / Top -1	44	5220
	Top	48	5240
Nominal Channel Bandwidth	40 MHz		
Transmit Channels Tested:	Bottom	38	5190
	Top	46	5230
Nominal Channel Bandwidth	80 MHz		
Transmit Channels Tested:	Single	42	5210

3.5. Antenna Information

Antenna types with highest antenna gains amongst their supported radiation patterns were used for the EUT testing:

Antenna Group:	8 dBi Antenna Group
Antenna Radiation Type:	Omni Directional
Antenna Model Number:	ANT795-6MN
Antenna Gain:	8 dBi @ 5 GHz
Antenna Beamwidth:	150°
Antenna Connector Type:	N
Manufacturer Article Number:	6GK5795-6MN10-0AA6
Batch Number:	1000744236

Antenna Group:	9 dBi Antenna Group
Antenna Radiation Type:	Sector
Antenna Model Number:	ANT795-6DC
Antenna Gain:	9 dBi @ 5 GHz
Antenna Beamwidth:	55°H / 55°V
Antenna Connector Type:	N
Manufacturer Article Number:	6GK5795-6DC00-0AA0
Batch Number:	006.707039

Antenna Group:	23 dBi Antenna Group
Antenna Radiation Type:	Directed
Antenna Model Number:	ANT793-8DK
Antenna Gain:	23 dBi @ 5 GHz
Antenna Cable Loss:	8.8 dB @ 5 GHz
Effective Antenna Gain:	14.2 dBi @ 5 GHz
Antenna Beamwidth:	9° H / 9° V
Antenna Connector Type:	N
Manufacturer Article Number:	6GK5793-8DK00-0AA0
Batch Number:	02 722467

3.6. Support Equipment

The following support equipment was used to exercise the EUT during testing:

A. Support Equipment (In-house)

Item	Description	Brand Name	Model Name or Number	Serial Number
1	Laptop	Lenovo	L560	MP-16X73B 16/11
2	Lab DC Power Supply	Conrad Electronic	PS-2403D	Not stated
3	Lab Voltage Rectifier Power Supply	Spitzenberger Spies	PAS 5000	A2464 00/2 0200

B. Support Equipment (Manufacturer supplied)

Item	Description	Brand Name	Model Name or Number	Serial Number
1	DC Power Supply Cable (Length: 2 m Quantity: 2 Pcs)	--	Standard 2 wire cable	--
2	M12- RJ45 Ethernet Cable (Length: 2 m Quantity: 2 Pcs)	SIEMENS	LEONI L INDUSTRIAL ETHERNET FLEXIBLE 6XV1870-2E	--
3	N-N Connector Antenna Cable (Length: 10 m Quantity: 4 Pcs)	SIEMENS Simatic Net Antenna Cable	6XV1875-5AN10 J39	--
4	Test Evaluation Board (Quantity: 2 Pcs)	SIEMENS	A5E36374290-AE GTW 18 94V-0	--
5	UMCC- N Connector Cable (Length: 0.25 m Quantity: 4 Pcs)	SIEMENS	--	--
6	N Connector-50 Ω Terminations (Quantity: 4 Pcs)	SIEMENS	--	--
7	SIMATIC PS 307 Power Supply (Input: AC 120 /230 V 2.3 /1.2 A 50-60 Hz) (Output: DC 24 V 5 A) (Quantity: 1 Pcs)	SIEMENS	6ES7307-1EA01-0AA0	YSU/HO 165357

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

☒ **Continuously transmitting modulated carrier with combination of**

- **Maximum Power Settings** [refer section 4.3]
- **Test Channels** [refer section 3.4]
- **Worst Case* SISO and MIMO modes :**
 - o 802.11a: 6 Mbit/s / SISO Mode
 - o 802.11n HT20: MCS0 / SISO Mode
 - o 802.11n HT40: MCS0 / SISO Mode
 - o 802.11ac HT20: MCS0 / SISO Mode
 - o 802.11ac HT40: MCS0 / SISO Mode
 - o 802.11ac HT80: MCS0 / SISO Mode
 - o 802.11a: 6 Mbit/s / MIMO Modes
 - o 802.11n HT20: MCS0 / MIMO Modes
 - o 802.11n HT40: MCS0 / MIMO Modes
 - o 802.11ac HT20: MCS0 / MIMO Modes
 - o 802.11ac HT40: MCS0 / MIMO Modes
 - o 802.11ac HT80: MCS0 / MIMO Modes

*Multiple supported modulation schemes, nominal channel bandwidths and SISO/MIMO configurations were initially investigated to determine the above mentioned worst case data rates.

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- **EUT Power Supply:**

- o For AC Conducted measurement EUT(the radio module) was mounted on Test Evaluation Board. Using Siemens SIMATIC PS 307 Power Supply, 24 V DC was supplied to this board; which in turn supplying 3.3 V DC to EUT.
- o For all conducted measurements EUT(the radio module) was mounted on Test Evaluation Board. Using Lab DC Power Supply 24 V DC was supplied to this board; which in turn supplying 3.3 V DC to EUT.
- o For all radiated measurements EUT(the radio module) was mounted on Test Evaluation Board. Using Lab Voltage Rectifier Power Supply 24 V DC was supplied to this board; which in turn supplying 3.3 V DC to EUT.

- **Test Mode Activation:**

- o For continuous transmit tests the EUT was controlled using the chipset manufacturers 'cli' console over tera-term and putty. This was run from within the terminal application on the EUT. The application was used to enable continuous transmission mode and to select the test channels, data rates and modulation schemes as required.

- **Worst Case Mode Determination:**

- o Multiple supported modulation schemes, nominal channel bandwidths and SISO+MIMO Modes configurations were initially investigated to determine worst case modes.
- o The data rates that produced worst case results for each 802.11 mode (a/n/ac) were then used for measurements presented in this report.

- **Conducted Measurements:**

- o RF Output Power, Power Spectral Density measured separately on each Port with all supported SISO & MIMO Port combinations.
- o For Occupied Channel Bandwidth & Duty Cycles were computed with worst case SISO mode; as they found to be independent of number of transmitter chains used.
- o Conducted spurious emissions measurements were performed with SISO Mode; as this port was found to have the worst case in terms of power settings amongst all supported possible SISO & MIMO Port combinations.

- **AC Conducted Emissions Measurements:**

- o AC conducted tests were performed with all listed Antenna Groups with MIMO Port 1+2+3+4, employing maximum possible Antennas.
- o The Toyo EMI Software EP5/CE Ver 4.0.1. was used for these measurements.

- **Radiated Band Edge Measurements:**

- o Radiated Band edge emissions were performed with Antenna types listed in section 3.5 with all possible MIMO Port combinations.
- o Radiated Band edge emissions were performed with the EUT & Antennas in the orientation simulating the worst case spurious emissions.

- **Radiated Cabinet Emission Measurements:**

- o Transmitter cabinet radiated emissions were performed by terminating EUT's all 4-MIMO Ports with 50 Ω (proper impedance matching) and with maximum supported power settings amongst all supported SISO & MIMO Port combinations as well as amongst listed Antenna types.
- o EMC32 V10.1.0 Software & Toyo EP5/RE Ver 4.0.1 were used for these measurements.

- **Applicable to all Tests:**

- o For all the measurements and Antennas beam forming gain of 0 dBi have been assumed.
- o All the supplied antennas listed in section 3.5 have been tested with power settings in section 4.3.
- o During testing unused EUT ports were terminated as listed in section 4.3.

4.3. Used Power Settings & Port Terminations

The EUT was configured with following GUI Power Settings (PWL) & test channels for 8 dBi Antenna configurations.

5150 MHz to 5250 MHz [U-NII-1 Band]							
8 dBi Antenna Group							
SISO Port 1 (Note 1)							
Nominal Channel Bandwidth	20 MHz						
Test Channel	36	40	44	48	40 MHz		
a-mode: 6 Mbit	15	18	18	18	38	46	80 MHz
n-mode : MCS0	15	18	18	18	15	15	42
ac-mode: MCS0	15	18	18	18	15	15	15
Note 1: Unused Ports 2,3 & 4 Terminated with 50 Ω							
MIMO Port 1+2 (Note 2)							
Nominal Channel Bandwidth	20 MHz						
Test Channel	36	40	44	48	40 MHz		
a-mode: 6 Mbit	16	17	17	17	38	46	80 MHz
n-mode : MCS0	16	17	17	17	18	18	42
ac-mode: MCS0	16	17	17	17	18	18	18
Note 2: Unused Ports 3 & 4 Terminated with 50 Ω							
MIMO Port 1+2+3 (Note 3)							
Nominal Channel Bandwidth	20 MHz						
Test Channel	36	40	44	48	40 MHz		
a-mode: 6 Mbit	13	15	15	15	38	46	80 MHz
n-mode : MCS0	13	15	15	15	14	14	42
ac-mode: MCS0	13	15	15	15	14	14	14
Note 3: Unused Port 4 Terminated with 50 Ω							
MIMO Port 1+2+3+4 (Note 4)							
Nominal Channel Bandwidth	20 MHz						
Test Channel	36	40	44	48	40 MHz		
a-mode: 6 Mbit	13	14	14	14	38	46	80 MHz
n-mode : MCS0	13	14	14	14	15	15	42
ac-mode: MCS0	13	14	14	14	15	15	15
Note 4: None of the Port was Terminated with 50 Ω							

The EUT was configured with following GUI Power Settings (PWL) & test channels for 9 dBi Antenna configurations.

5150 MHz to 5250 MHz [U-NII-1 Band]							
9 dBi Antenna Group							
SISO Port 1 (Note 1)							
Nominal Channel Bandwidth	20 MHz						
Test Channel	36	40	44	48	40 MHz		
a-mode: 6 Mbit	12	17	17	17	38	46	80 MHz
n-mode : MCS0	12	17	17	17	12	12	42
ac-mode: MCS0	12	17	17	17	12	12	12
Note 1: Unused Ports 2,3 & 4 Terminated with 50 Ω							
MIMO Port 1+2 (Note 2)							
Nominal Channel Bandwidth	20 MHz						
Test Channel	36	40	44	48	40 MHz		
a-mode: 6 Mbit	10	16	16	16	38	46	80 MHz
n-mode : MCS0	10	16	16	16	12	12	42
ac-mode: MCS0	10	16	16	16	12	12	12
Note 2: Unused Ports 3 & 4 Terminated with 50 Ω							
MIMO Port 1+2+3 (Note 3)							
Nominal Channel Bandwidth	20 MHz						
Test Channel	36	40	44	48	40 MHz		
a-mode: 6 Mbit	12	14	14	14	38	46	80 MHz
n-mode : MCS0	12	14	14	14	13	13	42
ac-mode: MCS0	12	14	14	14	13	13	13
Note 3: Unused Port 4 Terminated with 50 Ω							
MIMO Port 1+2+3+4 (Note 4)							
Nominal Channel Bandwidth	20 MHz						
Test Channel	36	40	44	48	40 MHz		
a-mode: 6 Mbit	11	N/T**	11	11	38	46	80 MHz
n-mode : MCS0	11	N/T**	11	11	15	15	42
ac-mode: MCS0	11	N/T**	11	11	15	15	15
Note 4: None of the Port was Terminated with 50 Ω							
N/T** : CH40 not tested as it has same PWL as that of CH36							

The EUT was configured with following GUI Power Settings (PWL) & test channels for 23 dBi Antenna configurations.

5150 MHz to 5250 MHz [U-NII-1 Band]							
23 dBi Antenna Group							
SISO Port 1 (Note 1)							
Nominal Channel Bandwidth	20 MHz						
Test Channel	36	40	44	48	40 MHz		
a-mode: 6 Mbit	7	13	13	13	38	46	80 MHz
n-mode : MCS0	7	13	13	13	13	13	42
ac-mode: MCS0	7	13	13	13	13	13	7
Note 1: Unused Ports 2,3 & 4 Terminated with 50 Ω							
MIMO Port 1+2 (Note 2)							
Nominal Channel Bandwidth	20 MHz						
Test Channel	36	40	44	48	40 MHz		
a-mode: 6 Mbit	7	11	11	11	38	46	80 MHz
n-mode : MCS0	7	11	11	11	13	13	42
ac-mode: MCS0	7	11	11	11	13	13	7
Note 2: Unused Ports 3 & 4 Terminated with 50 Ω							
MIMO Port 1+2+3 (Note 3)							
Nominal Channel Bandwidth	20 MHz						
Test Channel	36	40	44	48	40 MHz		
a-mode: 6 Mbit	8	9	9	9	38	46	80 MHz
n-mode : MCS0	8	9	9	9	8	8	42
ac-mode: MCS0	8	9	9	9	8	8	8
Note 3: Unused Port 4 Terminated with 50 Ω							
MIMO Port 1+2+3+4 (Note 4)							
Nominal Channel Bandwidth	20 MHz						
Test Channel	36	40	44	48	40 MHz		
a-mode: 6 Mbit	7	N/T**	7	7	38	46	80 MHz
n-mode : MCS0	7	N/T**	7	7	9	9	42
ac-mode: MCS0	7	N/T**	7	7	9	9	9
Note 4: None of the Port was Terminated with 50 Ω							
N/T** : CH40 not tested as it has same PWL as that of CH36							

4.4. Used RF Cables

For radiated band edge & AC conducted emission measurements performed with Antennas, EUT ports were connected with following RF cables to the different antenna type.

For further details refer Section 3. B.

Antenna Group Type	EUT to Antennas Cable Details			
	SISO Mode Port 1	MIMO Mode Port 1+2	MIMO Mode Port 1+2+3	MIMO Mode Port 1+2+3+4
8 dBi Antenna Group	UMCC- N Connector Cables			
9 dBi Antenna Group	UMCC- N Connector Cables			
23 dBi Antenna Group	N-N Connector Antenna Cables*			
*As per applicant's declaration 23 dBi Antenna Group radiated tests have been carried out with N-N Connector Antenna Cable (10 m) having maximum loss of 8.8 dB @ 5 GHz bands. An RF level offset was entered in GUI settings to compensate the loss of those N-N Connector Antenna Cable.				

For radiated cabinet emissions measurements performed without Antennas, EUT ports were connected to 50 Ω terminations with following RF cables.

For further details refer Section 3. B.

Antenna Group Type	EUT to 50 Ω Terminations Cable Details
	MIMO Mode Port 1+2+3+4
8 dBi Antenna Group	UMCC- N Connector Cables
9 dBi Antenna Group	UMCC- N Connector Cables
23 dBi Antenna Group	UMCC- N Connector Cables

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to Section 6 *Measurement Uncertainty* for details.

In accordance with DAkkS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

5.2. Test Results

5.2.1. Transmitter AC Conducted Spurious Emissions

Test Summary:

Test Engineers:	Krume Ivanov, Bernd Woerl & Vladimir Eppel	Test Dates:	20 May 2019 & 19 July 2019
Test Sample Serial Number:	192.168.0.80 & 192.168.0.60		
Test Site Identification	SR 7/8		

FCC Reference:	Part 15.207
Test Method Used:	ANSI C63.10 Section 6.2 / FCC KDB 174176 and notes below

Environmental Conditions:

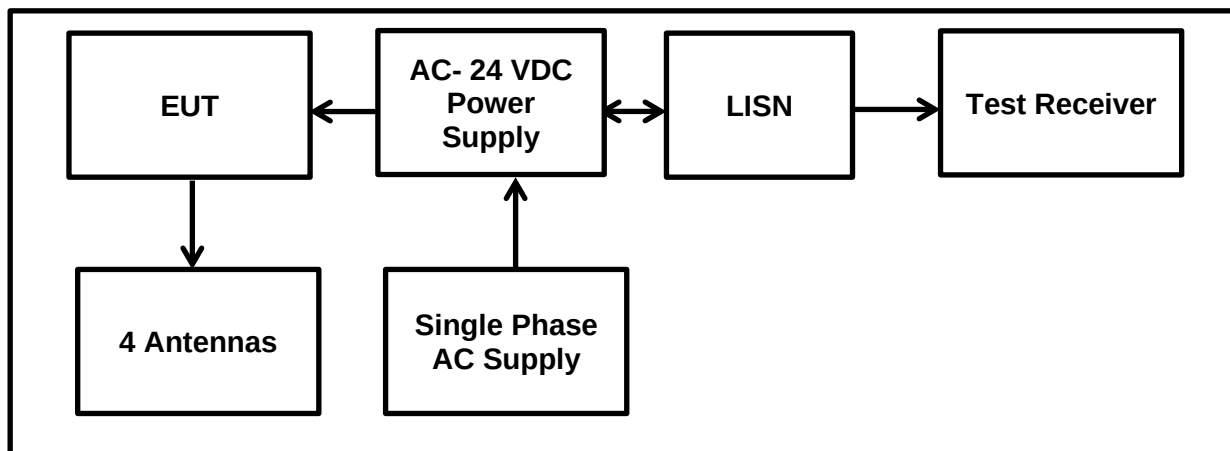
Temperature (°C):	21
Relative Humidity (%):	35 to 41

Settings of the Instrument

Detector	Quasi Peak/ Average Peak
----------	--------------------------

Notes:

1. Measurement software used: Toyo EMI Software; CE measurement software EP5/CE Ver 4.0.1.
2. The EUT was powered by supplying 24 V DC.
3. In accordance with FCC KDB 174176 Q4; the SIEMENS SIMATIC PS 307 Power Supply was connected to 120 VAC 60 Hz single phase supply via a LISN.
4. The HEWLETT PACKARD E3620A Power Supply was connected to 240 VAC 60 Hz single phase supply via a LISN.
5. AC conducted tests were performed with :
 - a. each type of listed Antenna Groups.
 - b. maximum power setting (PWL) amongst all supported U-N-II bands & SISO-MIMO modes
 - c. MIMO Port 1+2+3+4 employing maximum possible Antennas
6. Measurements were performed in shielded room (SR7/ 8 Asset Number 1603671). The EUT was placed at a height of 80 cm above the reference ground plane and in a distance of 40 cm from the vertical ground plane at the edge of the table.
7. Pre-scans were performed and markers placed on the highest live and neutral measured levels. Final measurements were performed on the marker frequencies and the results entered into the tables below.
8. All other emissions shown on the pre-scan plot were investigated and found to be ambient or >20 dB below the applicable limit or below the measurement system noise floor.
9. The final measured value, for the given emission, in the table below incorporates the cable loss. Calculation: Level = test receiver reading + path loss (cable attenuation + correction LISN).

Transmitter AC Conducted Spurious Emissions (continued)**Test setup:**

Transmitter AC Conducted Spurious Emissions (continued) :**Results: Live (L1) / Quasi Peak / 120 VAC 60 Hz / 8 dBi Antenna Group**

Frequency [MHz]	Line Phase	Reading QP [dB(μV)]	Correction Factor [dB]	Level QP [dB(μV)]	Limit QP [dB(μV)]	Margin QP [dB]	Result
0.17255	Live (L1)	35.0	9.9	44.9	64.8	19.9	Complied
0.19709	Live (L1)	29.6	9.9	39.5	63.7	24.2	Complied
0.22966	Live (L1)	31.4	9.9	41.3	62.5	21.2	Complied
0.27174	Live (L1)	27.0	9.8	36.8	61.1	24.3	Complied
0.37996	Live (L1)	24.4	9.9	34.3	58.3	24.0	Complied
3.55912	Live (L1)	23.9	9.9	33.8	56.0	22.2	Complied

Results: Live (L1) / Average / 120 VAC 60 Hz / 8 dBi Antenna Group

Frequency [MHz]	Line Phase	Reading AV [dB(μV)]	Correction Factor [dB]	Level AV [dB(μV)]	Limit AV [dB(μV)]	Margin AV [dB]	Result
0.17255	Live (L1)	27.5	9.9	37.4	54.8	17.4	Complied
0.19709	Live (L1)	16.6	9.9	26.5	53.7	27.2	Complied
0.22966	Live (L1)	25.2	9.9	35.1	52.5	17.4	Complied
0.27174	Live (L1)	13.8	9.8	23.6	51.1	27.5	Complied
0.37996	Live (L1)	10.1	9.9	20.0	48.3	28.3	Complied
3.55912	Live (L1)	9.6	9.9	19.5	46.0	26.5	Complied

Result: Pass

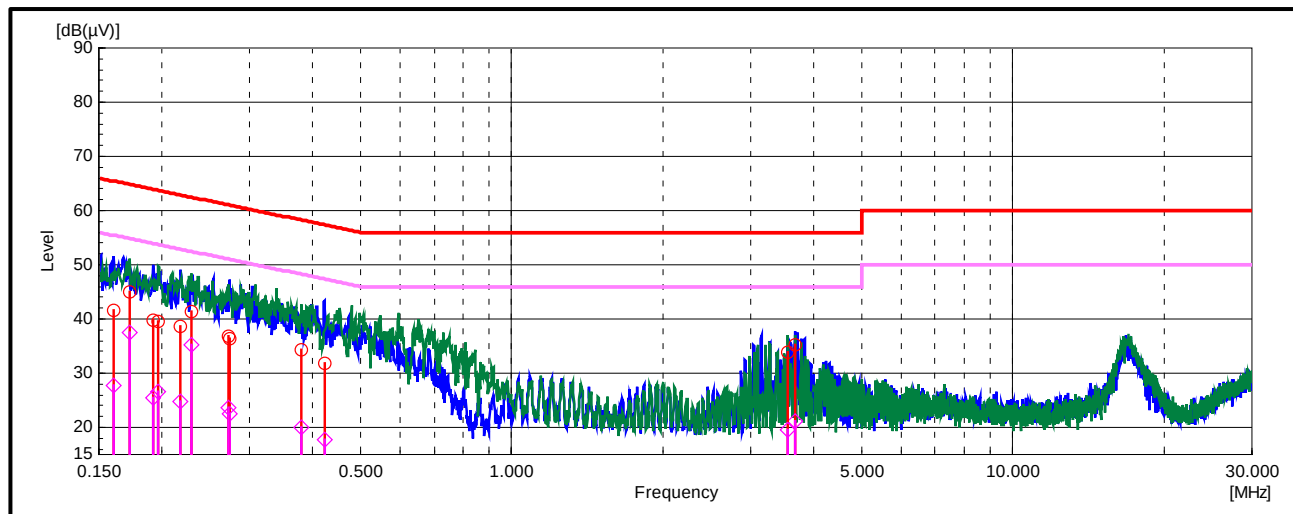
Transmitter AC Conducted Spurious Emissions (continued)**Results: Neutral (N) / Quasi Peak / 120 VAC 60 Hz / 8 dBi Antenna Group**

Frequency [MHz]	Line Phase	Reading QP [dB(μV)]	Correction Factor [dB]	Level QP [dB(μV)]	Limit QP [dB(μV)]	Margin QP [dB]	Result
0.16052	Neutral (N)	31.7	9.9	41.6	65.4	23.8	Complied
0.19259	Neutral (N)	29.8	9.9	39.7	63.9	24.2	Complied
0.21864	Neutral (N)	28.7	9.9	38.6	62.9	24.3	Complied
0.27375	Neutral (N)	26.6	9.8	36.4	61.0	24.6	Complied
0.42305	Neutral (N)	21.9	9.9	31.8	57.4	25.6	Complied
3.67535	Neutral (N)	25.3	9.9	35.2	56.0	20.8	Complied

Results: Neutral (N) / Average / 120 VAC 60 Hz / 8 dBi Antenna Group

Frequency [MHz]	Line Phase	Reading AV [dB(μV)]	Correction Factor [dB]	Level AV [dB(μV)]	Limit AV [dB(μV)]	Margin AV [dB]	Result
0.16052	Neutral (N)	17.7	9.9	27.6	55.4	27.8	Complied
0.19259	Neutral (N)	15.6	9.9	25.5	53.9	28.4	Complied
0.21864	Neutral (N)	14.8	9.9	24.7	52.9	28.2	Complied
0.27375	Neutral (N)	12.6	9.8	22.4	51.0	28.6	Complied
0.42305	Neutral (N)	7.9	9.9	17.8	47.4	29.6	Complied
3.67535	Neutral (N)	11.2	9.9	21.1	46.0	24.9	Complied

Result: Pass

Transmitter AC Conducted Spurious Emissions (continued)**Plot: Live and Neutral Line / 8 dBi Antenna Group**

Note: The plots show the max hold (peak detector) pre-scan results measured. Blue graph represents the result of the N-Line; green graph - the results for L1-Line. The bar graphs indicate the final measurement result applying the dedicated detector at selected frequencies for each limit line (red cycle for quasi peak limit; violet cycle for average limit).

Legend (Conducted Emissions)	
Items	Description
	Blue graph is the result of peak measurement phase L
	Green graph is the result of peak measurement phase N
	Limit line Quasi-Peak
	Limit line Average
	Final item Quasi-Peak
	Final item Average

Transmitter AC Conducted Spurious Emissions (continued) :**Results: Live (L1) / Quasi Peak / 240 VAC 60 Hz / 8 dBi Antenna Group**

Frequency [MHz]	Line Phase	Reading QP [dB(μV)]	Correction Factor [dB]	Level QP [dB(μV)]	Limit QP [dB(μV)]	Margin QP [dB]	Result
0.17555	Live (L1)	7.1	9.9	17	64.7	47.7	Complied
0.25857	Live (L1)	8.6	9.8	18.4	61.5	43.1	Complied
0.38882	Live (L1)	10.7	9.9	20.6	58.1	37.5	Complied
0.46824	Live (L1)	0	9.9	9.9	56.5	46.6	Complied
0.67561	Live (L1)	-2	10	8	56	48	Complied

Results: Live (L1) / Average / 240 VAC 60 Hz / 8 dBi Antenna Group

Frequency [MHz]	Line Phase	Reading AV [dB(μV)]	Correction Factor [dB]	Level AV [dB(μV)]	Limit AV [dB(μV)]	Margin AV [dB]	Result
0.17555	Live (L1)	2	9.9	11.9	54.7	42.8	Complied
0.25857	Live (L1)	1.3	9.8	11.1	51.5	40.4	Complied
0.38882	Live (L1)	-3.3	9.9	6.6	48.1	41.5	Complied
0.46824	Live (L1)	-5.6	9.9	4.3	46.5	42.2	Complied
0.67561	Live (L1)	-6.5	10	3.5	46	42.5	Complied

Result: Pass

Transmitter AC Conducted Spurious Emissions (continued)**Results: Neutral (N) / Quasi Peak / 240 VAC 60 Hz / 8 dBi Antenna Group**

Frequency [MHz]	Line Phase	Reading QP [dB(μV)]	Correction Factor [dB]	Level QP [dB(μV)]	Limit QP [dB(μV)]	Margin QP [dB]	Result
10.48709	Neutral (N)	21.2	10	31.2	60	28.8	Complied
12.24203	Neutral (N)	16.4	10	26.4	60	33.6	Complied
13.98332	Neutral (N)	21.4	10.1	31.5	60	28.5	Complied
14.99043	Neutral (N)	19.8	10.1	29.9	60	30.1	Complied
15.30866	Neutral (N)	20.6	10.1	30.7	60	29.3	Complied
15.7246	Neutral (N)	19.7	10.1	29.8	60	30.2	Complied
19.22728	Neutral (N)	16.1	10.1	26.2	60	33.8	Complied

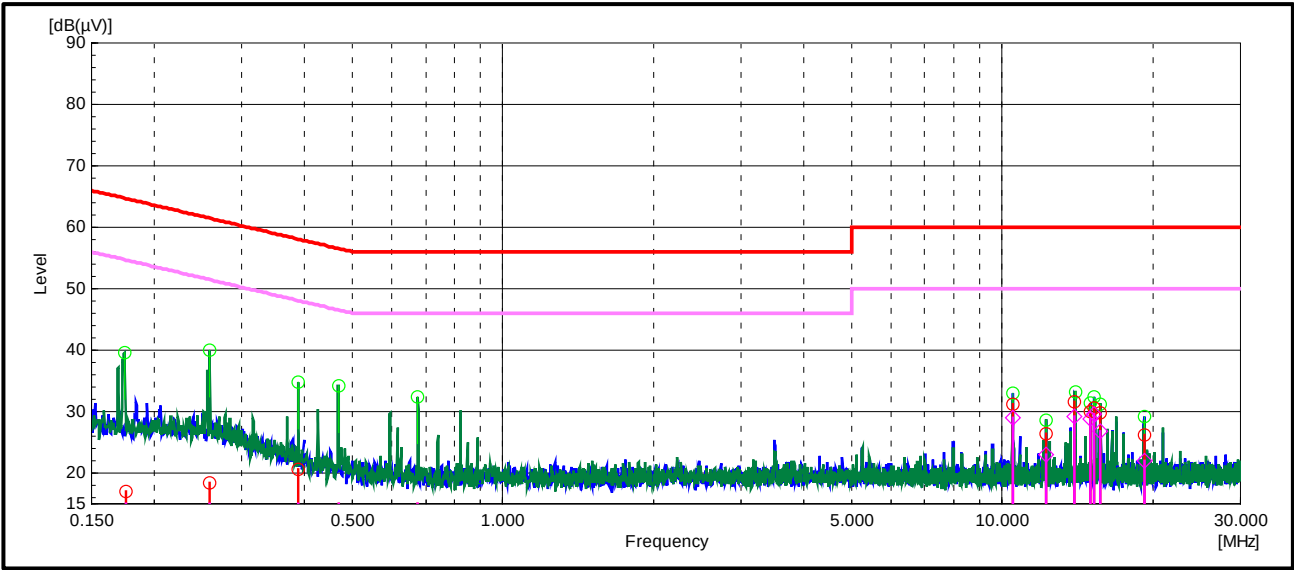
Results: Neutral (N) / Average / 240 VAC 60 Hz / 8 dBi Antenna Group

Frequency [MHz]	Line Phase	Reading AV [dB(μV)]	Correction Factor [dB]	Level AV [dB(μV)]	Limit AV [dB(μV)]	Margin AV [dB]	Result
10.48709	Neutral (N)	19	10	29	50	21	Complied
12.24203	Neutral (N)	12.9	10	22.9	50	27.1	Complied
13.98332	Neutral (N)	19	10.1	29.1	50	20.9	Complied
14.99043	Neutral (N)	18.6	10.1	28.7	50	21.3	Complied
15.30866	Neutral (N)	19.6	10.1	29.7	50	20.3	Complied
15.7246	Neutral (N)	16.6	10.1	26.7	50	23.3	Complied
19.22728	Neutral (N)	11.9	10.1	22	50	28	Complied

Result: Pass

Transmitter AC Conducted Spurious Emissions (continued)

Plot: Live and Neutral Line / 8 dBi Antenna Group



Note: The plots show the max hold (peak detector) pre-scan results measured. Blue graph represents the result of the N-Line; green graph - the results for L1-Line. The bar graphs indicate the final measurement result applying the dedicated detector at selected frequencies for each limit line (red cycle for quasi peak limit; violet cycle for average limit).

Legend (Conducted Emissions)	
Items	Description
	Blue graph is the result of peak measurement phase L
	Green graph is the result of peak measurement phase N
	Limit line Quasi-Peak
	Limit line Average
	Final item Quasi-Peak
	Final item Average

Transmitter AC Conducted Spurious Emissions (continued) :**Results: Live (L1) / Quasi Peak / 120 VAC 60 Hz / 9 dBi Antenna Group**

Frequency [MHz]	Line Phase	Reading QP [dB(μV)]	Correction Factor [dB]	Level QP [dB(μV)]	Limit QP [dB(μV)]	Margin QP [dB]	Result
0.17255	Live (L1)	34.0	9.9	43.9	64.8	20.9	Complied
0.23116	Live (L1)	29.7	9.9	39.6	62.4	22.8	Complied
0.28327	Live (L1)	27.0	9.8	36.8	60.7	23.9	Complied
0.32735	Live (L1)	24.6	9.8	34.4	59.5	25.1	Complied
3.21443	Live (L1)	22.5	9.9	32.4	56.0	23.6	Complied
18.75551	Live (L1)	24.7	10.1	34.8	60.0	25.2	Complied

Results: Live (L1) / Average / 120 VAC 60 Hz / 9 dBi Antenna Group

Frequency [MHz]	Line Phase	Reading AV [dB(μV)]	Correction Factor [dB]	Level AV [dB(μV)]	Limit AV [dB(μV)]	Margin AV [dB]	Result
0.17255	Live (L1)	26.4	9.9	36.3	54.8	18.5	Complied
0.23116	Live (L1)	23.4	9.9	33.3	52.4	19.1	Complied
0.28327	Live (L1)	20.1	9.8	29.9	50.7	20.8	Complied
0.32735	Live (L1)	13.1	9.8	22.9	49.5	26.6	Complied
3.21443	Live (L1)	9.2	9.9	19.1	46.0	26.9	Complied
18.75551	Live (L1)	20.1	10.1	30.2	50.0	19.8	Complied

Result: Pass

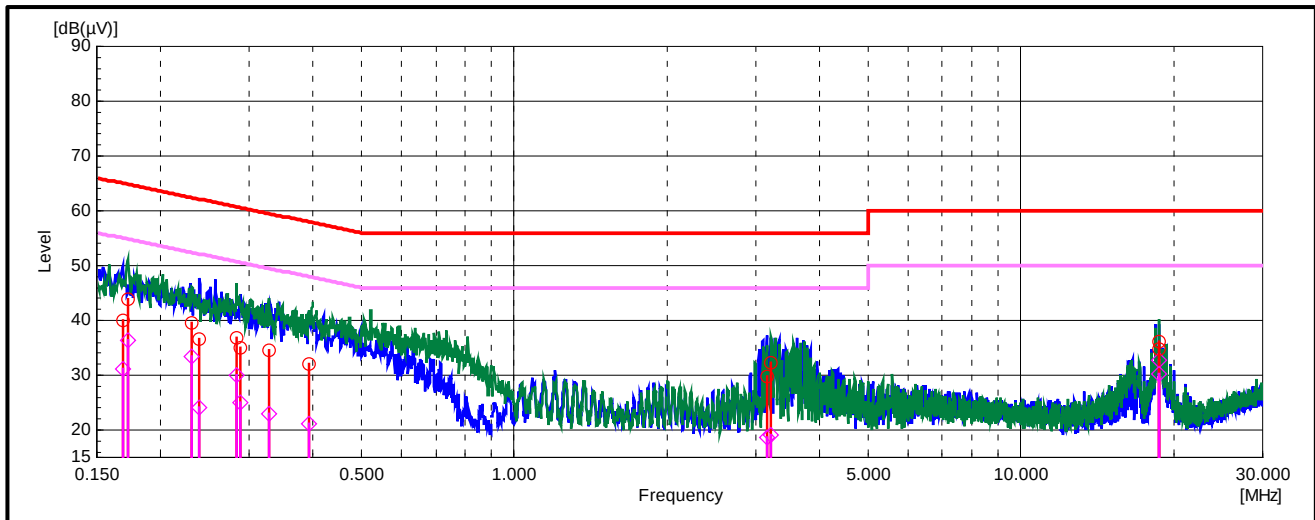
Transmitter AC Conducted Spurious Emissions (continued)**Results: Neutral (N) / Quasi Peak / 120 VAC 60 Hz / 9 dBi Antenna Group**

Frequency [MHz]	Line Phase	Reading QP [dB(μV)]	Correction Factor [dB]	Level QP [dB(μV)]	Limit QP [dB(μV)]	Margin QP [dB]	Result
0.16854	Neutral (N)	30.2	9.9	40.1	65.0	24.9	Complied
0.23918	Neutral (N)	26.8	9.9	36.7	62.1	25.4	Complied
0.28878	Neutral (N)	25.2	9.8	35.0	60.6	25.6	Complied
0.39248	Neutral (N)	22.1	9.9	32.0	58.0	26.0	Complied
3.1503	Neutral (N)	19.9	9.9	29.8	56.0	26.2	Complied
18.75551	Neutral (N)	25.9	10.1	36.0	60.0	24.0	Complied

Results: Neutral (N) / Average / 120 VAC 60 Hz / 9 dBi Antenna Group

Frequency [MHz]	Line Phase	Reading AV [dB(μV)]	Correction Factor [dB]	Level AV [dB(μV)]	Limit AV [dB(μV)]	Margin AV [dB]	Result
0.16854	Neutral (N)	21.1	9.9	31.0	55.0	24.0	Complied
0.23918	Neutral (N)	14.2	9.9	24.1	52.1	28.0	Complied
0.28878	Neutral (N)	15.3	9.8	25.1	50.6	25.5	Complied
0.39248	Neutral (N)	11.3	9.9	21.2	48.0	26.8	Complied
3.1503	Neutral (N)	8.8	9.9	18.7	46.0	27.3	Complied
18.75551	Neutral (N)	22.6	10.1	32.7	50.0	17.3	Complied

Result: Pass

Transmitter AC Conducted Spurious Emissions (continued)**Plot: Live and Neutral Line / 9 dBi Antenna Group**

Note: The plots show the max hold (peak detector) pre-scan results measured. Blue graph represents the result of the N-Line; green graph - the results for L1-Line. The bar graphs indicate the final measurement result applying the dedicated detector at selected frequencies for each limit line (red cycle for quasi peak limit; violet cycle for average limit).

Legend (Conducted Emissions)	
Items	Description
	Blue graph is the result of peak measurement phase L
	Green graph is the result of peak measurement phase N
	Limit line Quasi-Peak
	Limit line Average
	Final item Quasi-Peak
	Final item Average

Transmitter AC Conducted Spurious Emissions (continued) :**Results: Live (L1) / Quasi Peak / 240 VAC 60 Hz / 9 dBi Antenna Group**

Frequency [MHz]	Line Phase	Reading QP [dB(μV)]	Correction Factor [dB]	Level QP [dB(μV)]	Limit QP [dB(μV)]	Margin QP [dB]	Result
14.67249	Live (L1)	15.6	10.1	25.7	60	34.3	Complied
14.99504	Live (L1)	18.1	10.1	28.2	60	31.8	Complied
15.31498	Live (L1)	15.7	10.1	25.8	60	34.2	Complied
16.26669	Live (L1)	15.6	10.1	25.7	60	34.3	Complied
16.90486	Live (L1)	15.5	10.1	25.6	60	34.4	Complied
20.98711	Live (L1)	13.1	10.2	23.3	60	36.7	Complied

Results: Live (L1) / Average / 240 VAC 60 Hz / 9 dBi Antenna Group

Frequency [MHz]	Line Phase	Reading AV [dB(μV)]	Correction Factor [dB]	Level AV [dB(μV)]	Limit AV [dB(μV)]	Margin AV [dB]	Result
14.67249	Live (L1)	13.9	10.1	24	50	26	Complied
14.99504	Live (L1)	16.9	10.1	27	50	23	Complied
15.31498	Live (L1)	14.5	10.1	24.6	50	25.4	Complied
16.26669	Live (L1)	13.6	10.1	23.7	50	26.3	Complied
16.90486	Live (L1)	11.3	10.1	21.4	50	28.6	Complied
20.98711	Live (L1)	8.8	10.2	19	50	31	Complied

Result: Pass

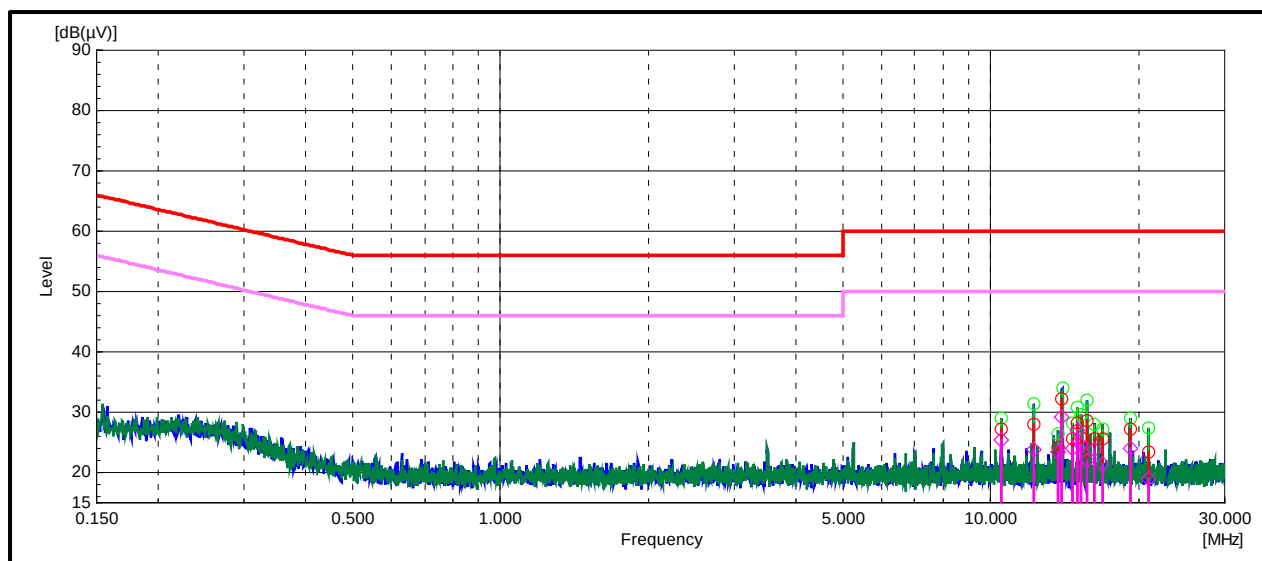
Transmitter AC Conducted Spurious Emissions (continued)**Results: Neutral (N) / Quasi Peak / 240 VAC 60 Hz / 9 dBi Antenna Group**

Frequency [MHz]	Line Phase	Reading QP [dB(μV)]	Correction Factor [dB]	Level QP [dB(μV)]	Limit QP [dB(μV)]	Margin QP [dB]	Result
10.48908	Neutral (N)	17.2	10	27.2	60	32.8	Complied
12.23251	Neutral (N)	18	10	28	60	32	Complied
13.71799	Neutral (N)	14.2	10.1	24.3	60	35.7	Complied
13.98101	Neutral (N)	22	10.1	32.1	60	27.9	Complied
15.74483	Neutral (N)	18.5	10.1	28.6	60	31.4	Complied
19.23389	Neutral (N)	17.1	10.1	27.2	60	32.8	Complied

Results: Neutral (N) / Average / 240 VAC 60 Hz / 9 dBi Antenna Group

Frequency [MHz]	Line Phase	Reading AV [dB(μV)]	Correction Factor [dB]	Level AV [dB(μV)]	Limit AV [dB(μV)]	Margin AV [dB]	Result
10.48908	Neutral (N)	15.4	10	25.4	50	24.6	Complied
12.23251	Neutral (N)	13.8	10	23.8	50	26.2	Complied
13.71799	Neutral (N)	13.2	10.1	23.3	50	26.7	Complied
13.98101	Neutral (N)	19	10.1	29.1	50	20.9	Complied
15.74483	Neutral (N)	11.8	10.1	21.9	50	28.1	Complied
19.23389	Neutral (N)	13.9	10.1	24	50	26	Complied

Result: Pass

Transmitter AC Conducted Spurious Emissions (continued)**Plot: Live and Neutral Line / 9 dBi Antenna Group**

Note: The plots show the max hold (peak detector) pre-scan results measured. Blue graph represents the result of the N-Line; green graph - the results for L1-Line. The bar graphs indicate the final measurement result applying the dedicated detector at selected frequencies for each limit line (red cycle for quasi peak limit; violet cycle for average limit).

Legend (Conducted Emissions)	
Items	Description
	Blue graph is the result of peak measurement phase L
	Green graph is the result of peak measurement phase N
	Limit line Quasi-Peak
	Limit line Average
	Final item Quasi-Peak
	Final item Average

Transmitter AC Conducted Spurious Emissions (continued) :**Results: Live (L1) / Quasi Peak / 120 VAC 60 Hz / 23 dBi Antenna Group**

Frequency [MHz]	Line Phase	Reading QP [dB(μV)]	Correction Factor [dB]	Level QP [dB(μV)]	Limit QP [dB(μV)]	Margin QP [dB]	Result
0.171	Live (L1)	34.2	9.9	44.1	64.9	20.8	Complied
0.21033	Live (L1)	29.1	9.9	39	63.2	24.2	Complied
0.28539	Live (L1)	28.3	9.8	38.1	60.7	22.6	Complied
3.38635	Live (L1)	20.4	9.9	30.3	56	25.7	Complied
14.01017	Live (L1)	20.2	10.1	30.3	60	29.7	Complied
16.83191	Live (L1)	19.1	10.1	29.2	60	30.8	Complied

Results: Live (L1) / Average / 120 VAC 60 Hz / 23 dBi Antenna Group

Frequency [MHz]	Line Phase	Reading AV [dB(μV)]	Correction Factor [dB]	Level AV [dB(μV)]	Limit AV [dB(μV)]	Margin AV [dB]	Result
0.171	Live (L1)	27	9.9	36.9	54.9	18	Complied
0.21033	Live (L1)	15.9	9.9	25.8	53.2	27.4	Complied
0.28539	Live (L1)	21.7	9.8	31.5	50.7	19.2	Complied
3.38635	Live (L1)	6.7	9.9	16.6	46	29.4	Complied
14.01017	Live (L1)	16.7	10.1	26.8	50	23.2	Complied
16.83191	Live (L1)	7.3	10.1	17.4	50	32.6	Complied

Result: Pass

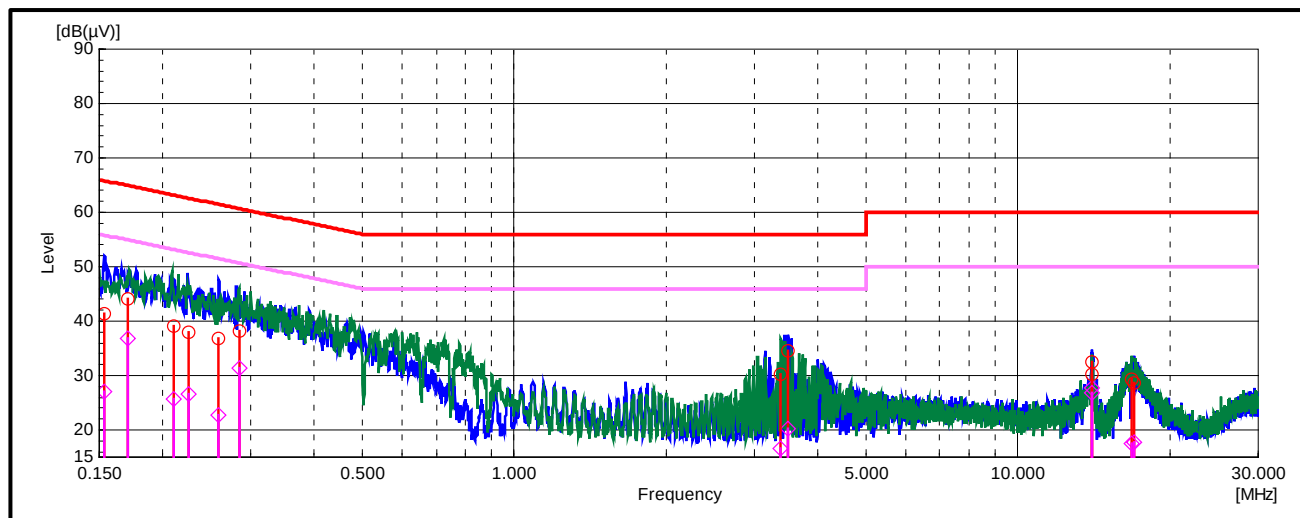
Transmitter AC Conducted Spurious Emissions (continued)**Results: Neutral (N) / Quasi Peak / 120 VAC 60 Hz / 23 dBi Antenna Group**

Frequency [MHz]	Line Phase	Reading QP [dB(μV)]	Correction Factor [dB]	Level QP [dB(μV)]	Limit QP [dB(μV)]	Margin QP [dB]	Result
0.15357	Neutral (N)	31.5	9.9	41.4	65.8	24.4	Complied
0.22514	Neutral (N)	28.1	9.9	38	62.6	24.6	Complied
0.25823	Neutral (N)	26.9	9.8	36.7	61.5	24.8	Complied
3.50455	Neutral (N)	24.7	9.9	34.6	56	21.4	Complied
14.00496	Neutral (N)	22.3	10.1	32.4	60	27.6	Complied
16.98672	Neutral (N)	18.5	10.1	28.6	60	31.4	Complied

Results: Neutral (N) / Average / 120 VAC 60 Hz / 23 dBi Antenna Group

Frequency [MHz]	Line Phase	Reading AV [dB(μV)]	Correction Factor [dB]	Level AV [dB(μV)]	Limit AV [dB(μV)]	Margin AV [dB]	Result
0.15357	Neutral (N)	17.2	9.9	27.1	55.8	28.7	Complied
0.22514	Neutral (N)	16.6	9.9	26.5	52.6	26.1	Complied
0.25823	Neutral (N)	13	9.8	22.8	51.5	28.7	Complied
3.50455	Neutral (N)	10.3	9.9	20.2	46	25.8	Complied
14.00496	Neutral (N)	17.7	10.1	27.8	50	22.2	Complied
16.98672	Neutral (N)	7.7	10.1	17.8	50	32.2	Complied

Result: Pass

Transmitter AC Conducted Spurious Emissions (continued)**Plot: Live and Neutral Line / 23 dBi Antenna Group**

Note: The plots show the max hold (peak detector) pre-scan results measured. Blue graph represents the result of the N-Line; green graph - the results for L1-Line. The bar graphs indicate the final measurement result applying the dedicated detector at selected frequencies for each limit line (red cycle for quasi peak limit; violet cycle for average limit).

Legend (Conducted Emissions)	
Items	Description
	Blue graph is the result of peak measurement phase L
	Green graph is the result of peak measurement phase N
	Limit line Quasi-Peak
	Limit line Average
	Final item Quasi-Peak
	Final item Average

Transmitter AC Conducted Spurious Emissions (continued) :**Results: Live (L1) / Quasi Peak / 240 VAC 60 Hz / 23 dBi Antenna Group**

Frequency [MHz]	Line Phase	Reading QP [dB(μV)]	Correction Factor [dB]	Level QP [dB(μV)]	Limit QP [dB(μV)]	Margin QP [dB]	Result
5.24425	Live (L1)	13	9.9	22.9	60	37.1	Complied
13.7218	Live (L1)	15.3	10.1	25.4	60	34.6	Complied
13.98743	Live (L1)	25	10.1	35.1	60	24.9	Complied
15.31708	Live (L1)	14.9	10.1	25	60	35	Complied
19.22463	Live (L1)	14.4	10.1	24.5	60	35.5	Complied
20.97461	Live (L1)	12.4	10.2	22.6	60	37.4	Complied

Results: Live (L1) / Average / 240 VAC 60 Hz / 23 dBi Antenna Group

Frequency [MHz]	Line Phase	Reading AV [dB(μV)]	Correction Factor [dB]	Level AV [dB(μV)]	Limit AV [dB(μV)]	Margin AV [dB]	Result
5.24425	Live (L1)	12.1	9.9	22	50	28	Complied
13.7218	Live (L1)	13.9	10.1	24	50	26	Complied
13.98743	Live (L1)	22.8	10.1	32.9	50	17.1	Complied
15.31708	Live (L1)	14.2	10.1	24.3	50	25.7	Complied
19.22463	Live (L1)	11.2	10.1	21.3	50	28.7	Complied
20.97461	Live (L1)	8.6	10.2	18.8	50	31.2	Complied

Result: Pass

Transmitter AC Conducted Spurious Emissions (continued)**Results: Neutral (N) / Quasi Peak / 240 VAC 60 Hz / 23 dBi Antenna Group**

Frequency [MHz]	Line Phase	Reading QP [dB(μV)]	Correction Factor [dB]	Level QP [dB(μV)]	Limit QP [dB(μV)]	Margin QP [dB]	Result
10.49494	Neutral (N)	16.6	10	26.6	60	33.4	Complied
12.24374	Neutral (N)	18	10	28	60	32	Complied
13.52721	Neutral (N)	12.5	10.1	22.6	60	37.4	Complied
14.68001	Neutral (N)	16.8	10.1	26.9	60	33.1	Complied
14.99885	Neutral (N)	18.6	10.1	28.7	60	31.3	Complied
15.73102	Neutral (N)	16.1	10.1	26.2	60	33.8	Complied

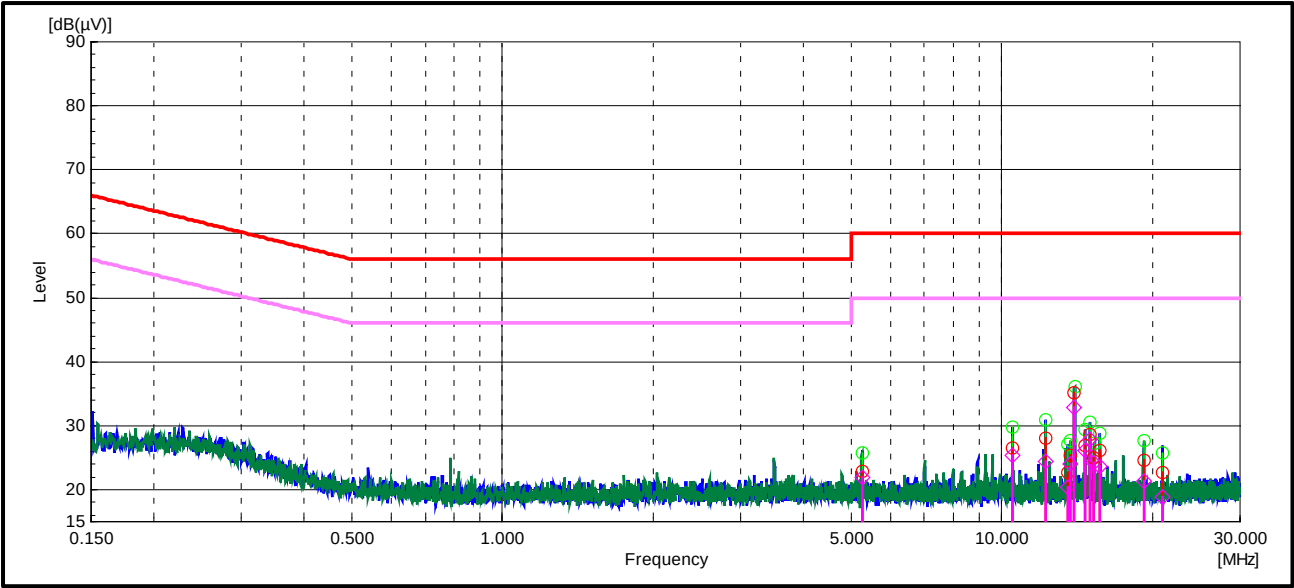
Results: Neutral (N) / Average / 240 VAC 60 Hz / 23 dBi Antenna Group

Frequency [MHz]	Line Phase	Reading AV [dB(μV)]	Correction Factor [dB]	Level AV [dB(μV)]	Limit AV [dB(μV)]	Margin AV [dB]	Result
10.49494	Neutral (N)	15.4	10	25.4	50	24.6	Complied
12.24374	Neutral (N)	14.4	10	24.4	50	25.6	Complied
13.52721	Neutral (N)	10.3	10.1	20.4	50	29.6	Complied
14.68001	Neutral (N)	16.1	10.1	26.2	50	23.8	Complied
14.99885	Neutral (N)	17.7	10.1	27.8	50	22.2	Complied
15.73102	Neutral (N)	13.5	10.1	23.6	50	26.4	Complied

Result: Pass

Transmitter AC Conducted Spurious Emissions (continued)

Plot: Live and Neutral Line / 23 dBi Antenna Group



Note: The plots show the max hold (peak detector) pre-scan results measured. Blue graph represents the result of the N-Line; green graph - the results for L1-Line. The bar graphs indicate the final measurement result applying the dedicated detector at selected frequencies for each limit line (red cycle for quasi peak limit; violet cycle for average limit).

Legend (Conducted Emissions)	
Items	Description
	Blue graph is the result of peak measurement phase L
	Green graph is the result of peak measurement phase N
	Limit line Quasi-Peak
	Limit line Average
	Final item Quasi-Peak
	Final item Average

5.2.2. Transmitter 26 dB Emission Bandwidth**Test Summary:**

Test Engineer:	Abdoufataou Salifou	Test Date:	14 February 2019 to 26 September 2019
Test Sample Serial Number:	192.168.0.60		
Test Site Identification	SR 9		

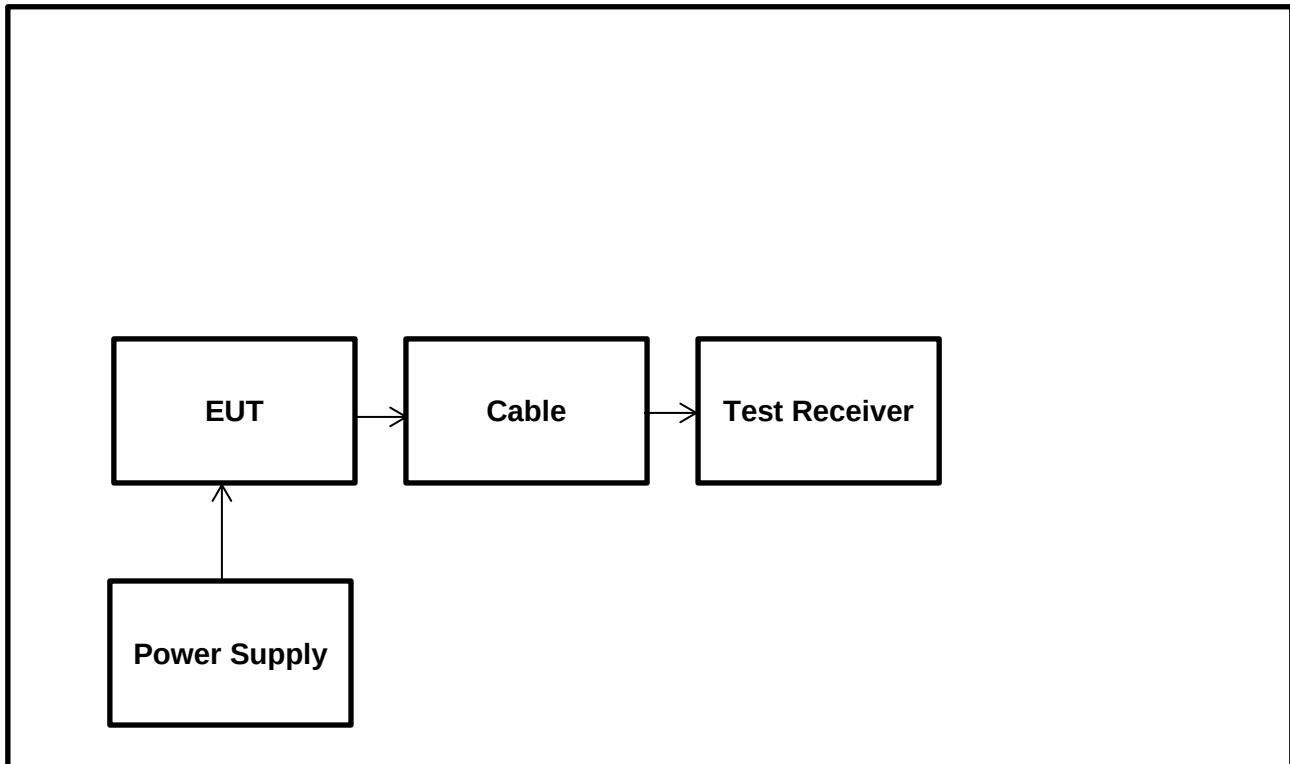
FCC Reference:	Part 15.403(i)
Test Method Used:	KDB 789033 D02 Section II.C.1.

Environmental Conditions:

Temperatures (°C):	21 to 25
Relative Humidity (%):	25 to 44

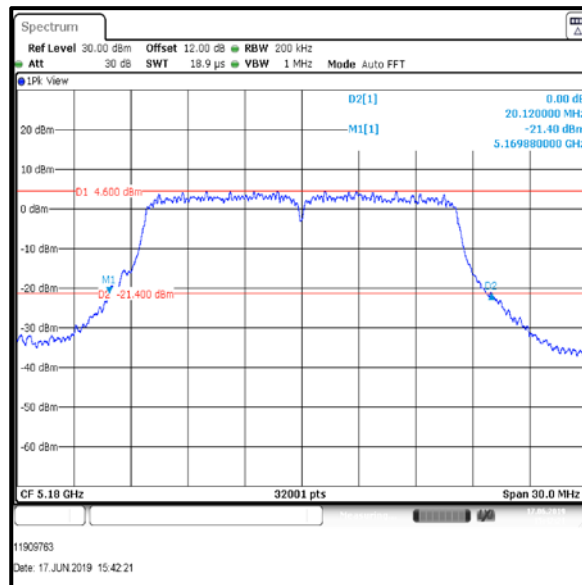
Notes:

1. All configurations supported by the EUT were investigated on the one channel in accordance with KDB 789033 Section II.C.1. Emission Bandwidth (EBW) test procedure.
2. Final measurements were performed in each supported operating band using the above configurations on the bottom, middle and top or single channels.
3. Plots for all data rates are archived on the Company server and available for inspection upon request.
4. 26 dB Emission Bandwidth were measured with worst case SISO mode; as they found to be same independent of number of transmitter chains used.
5. The RF port on the EUT was connected to the spectrum analyser using suitable attenuation and RF cable. The measured values takes into consideration the external attenuation correction factors. The RF cable attenuation (maximum 2.0 dB@5GHz) from the EUT to Analyzer including the 10 dB attenuation at the Spectrum Analyzer input was added as a reference level offset (12.0 dB) to each of the conducted plots.

Transmitter 26 dB Emission Bandwidth (continued)**Test Setup:**

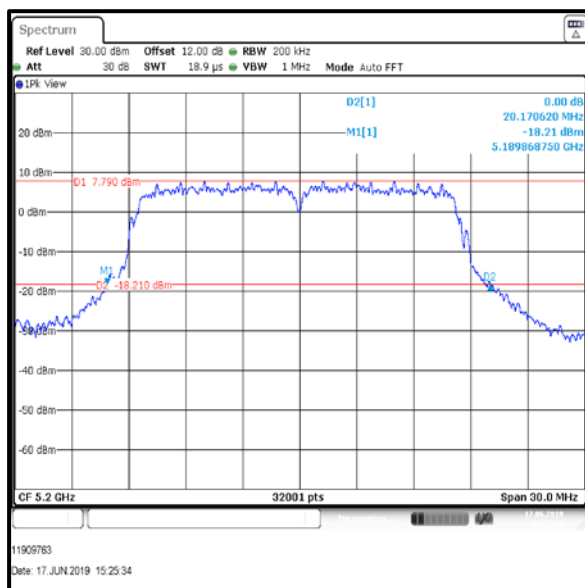
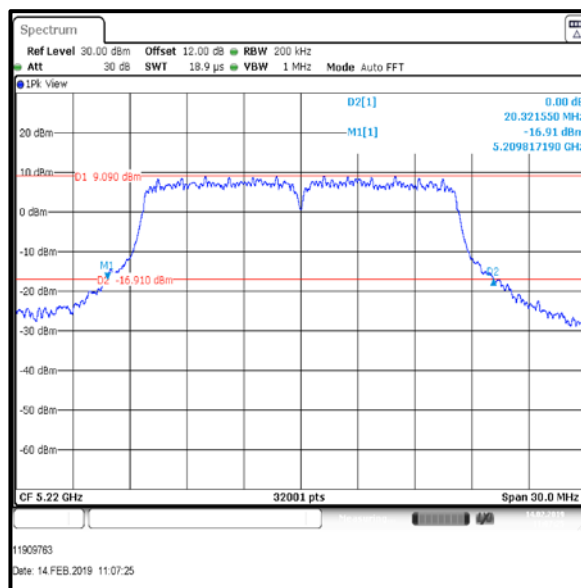
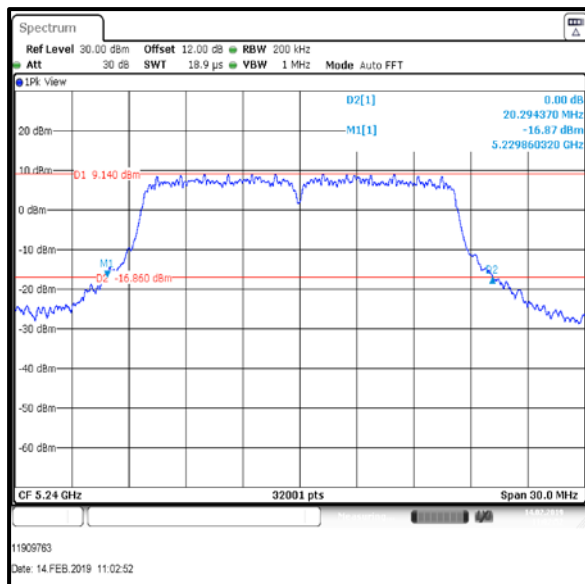
Transmitter 26 dB Emission Bandwidth (continued)**8 dBi Antenna Group****Results: 802.11a / 20 MHz / 6 Mbps / SISO / Port 1 / PWL 15 / 8 dBi Antenna Group**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5180	20.120

**Bottom Channel****Result: Pass**

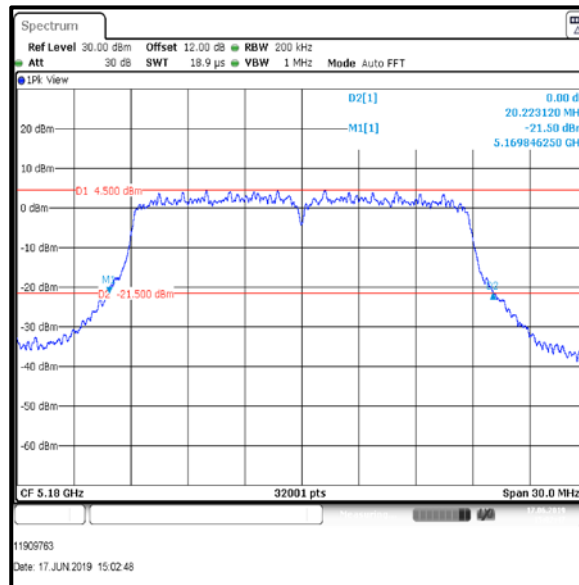
Transmitter 26 dB Emission Bandwidth (continued)**Results: 802.11a / 20 MHz / 6 Mbps / SISO / Port 1 / PWL 18 / 8 dBi Antenna Group**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom +1	5200	20.171
Middle	5220	20.322
Top	5240	20.294

**Bottom +1 Channel****Middle Channel****Top Channel****Result: Pass**

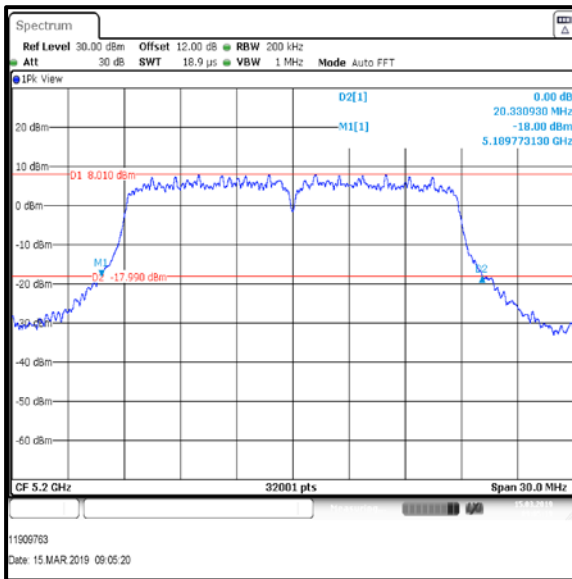
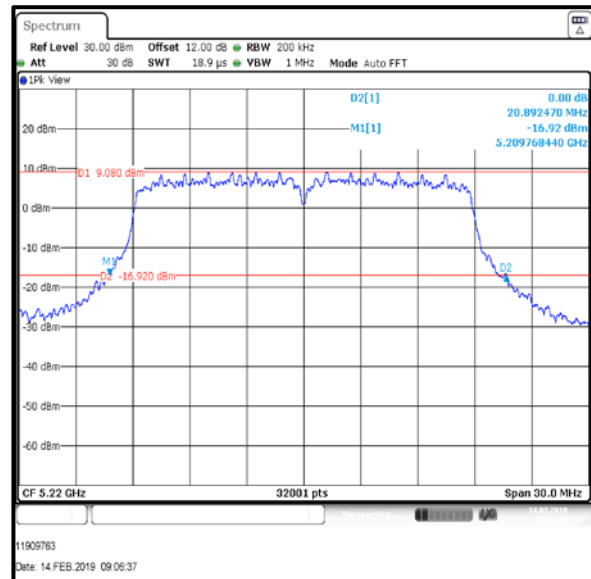
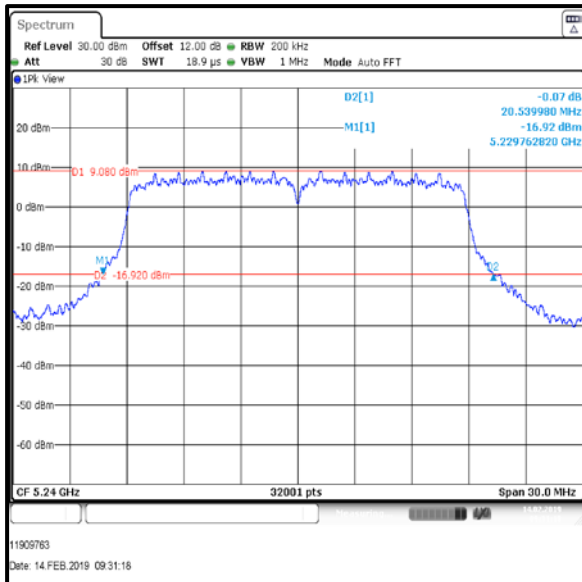
Transmitter 26 dB Emission Bandwidth (continued)**Results: 802.11n / 20 MHz / MCS0 / SISO / Port 1 / PWL 15 / 8 dBi Antenna Group**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5180	20.223

**Bottom Channel****Result: Pass**

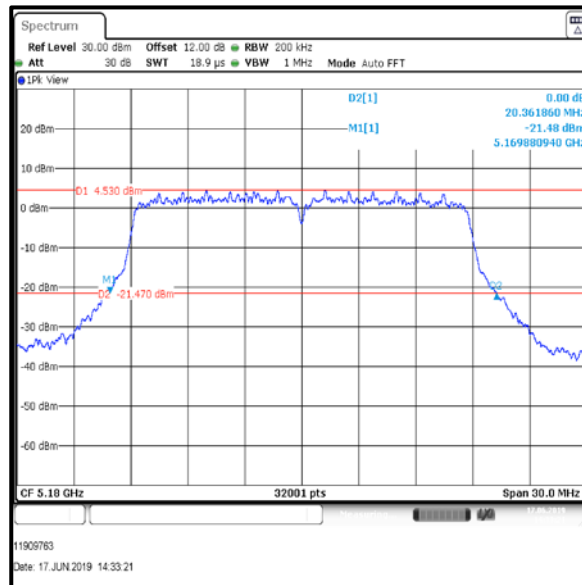
Transmitter 26 dB Emission Bandwidth (continued)**Results: 802.11n / 20 MHz / MCS0 / SISO / Port 1 / PWL 18 / 8 dBi Antenna Group**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom +1	5200	20.330
Middle	5220	20.892
Top	5240	20.540

**Bottom +1 Channel****Middle Channel****Top Channel****Result: Pass**

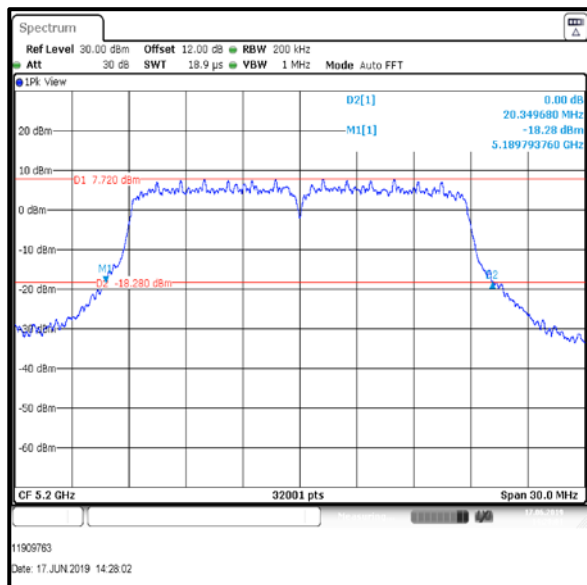
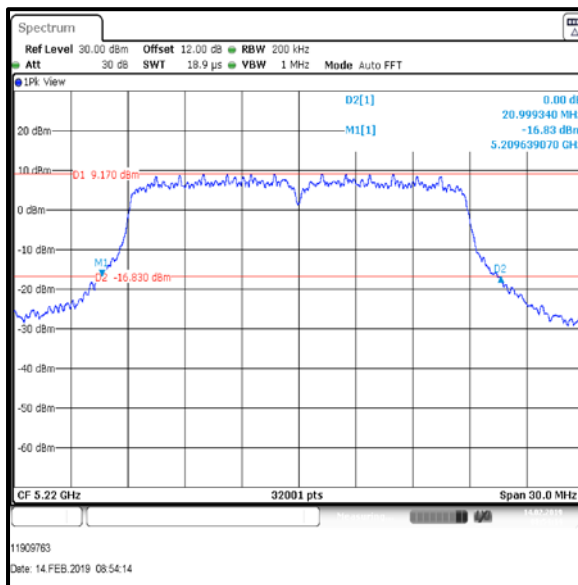
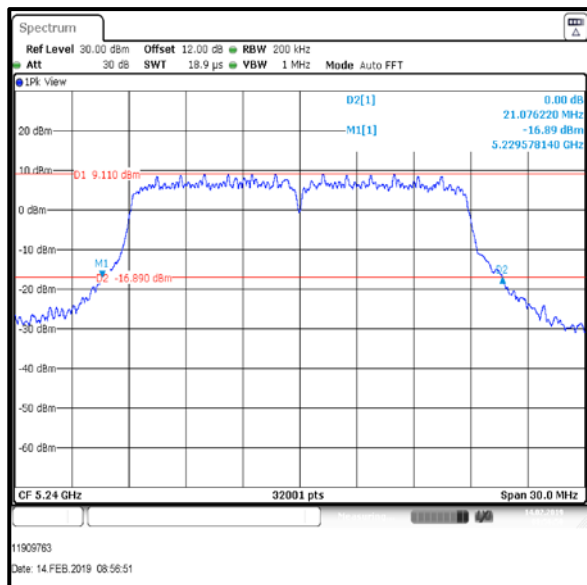
Transmitter 26 dB Emission Bandwidth (continued)**Results: 802.11ac / 20 MHz / MCS0 / SISO / Port 1 / PWL 15 / 8 dBi Antenna Group**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5180	20.362

**Bottom Channel****Result: Pass**

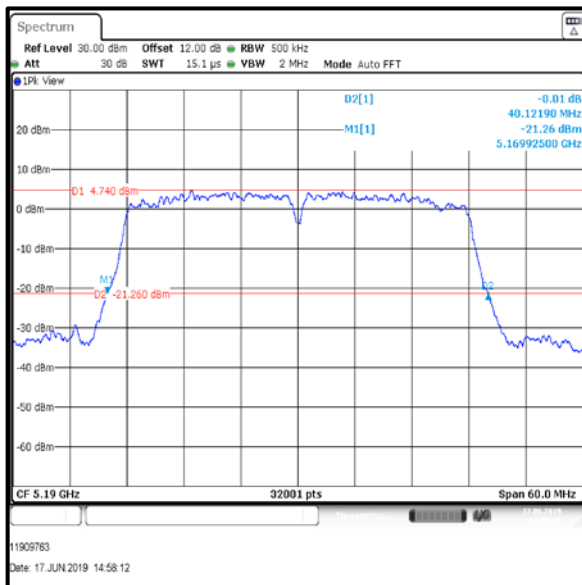
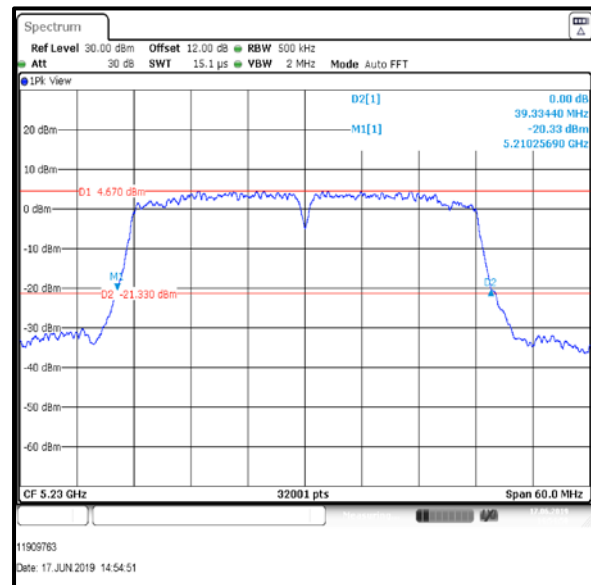
Transmitter 26 dB Emission Bandwidth (continued)**Results: 802.11ac / 20 MHz / MCS0 / SISO / Port 1 / PWL 18 / 8 dBi Antenna Group**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom +1	5200	20.350
Middle	5240	20.999
Top	5240	21.076

**Bottom +1 Channel****Middle Channel****Top Channel****Result: Pass**

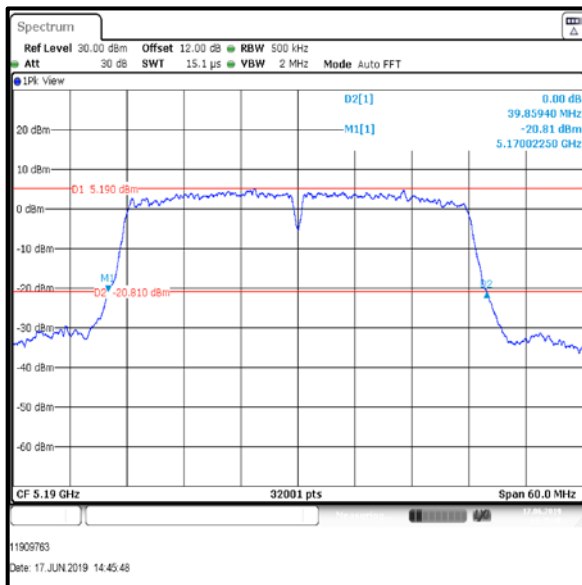
Transmitter 26 dB Emission Bandwidth (continued)**Results: 802.11n / HT40 / MCS0 / SISO / Port 1 / PWL 15 / 8 dBi Antenna Group**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5190	40.122
Top	5230	39.334

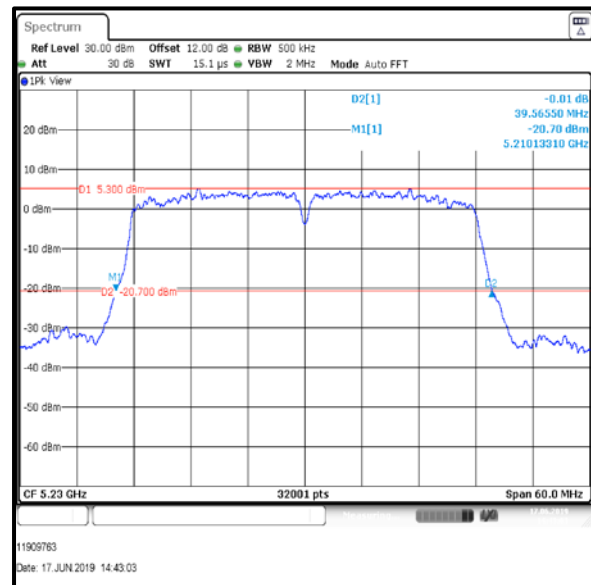
**Bottom Channel****Top Channel****Result: Pass**

Transmitter 26 dB Emission Bandwidth (continued)**Results: 802.11ac / HT40 / MCS0 / SISO / Port 1 / PWL 15 / 8 dBi Antenna Group**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5190	39.859
Top	5230	39.566



Bottom Channel

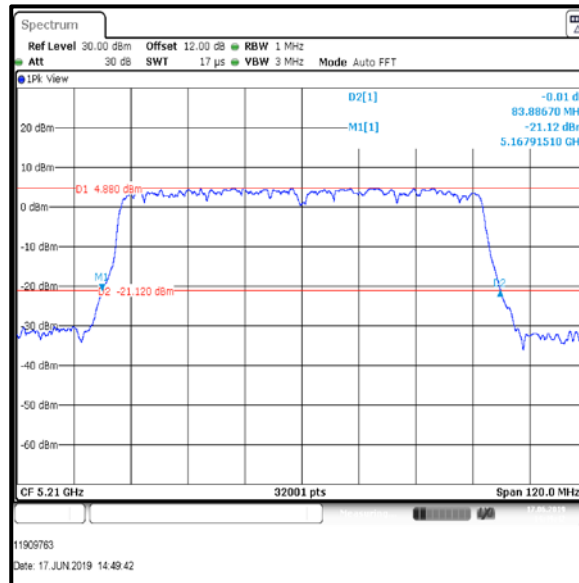


Top Channel

Result: Pass

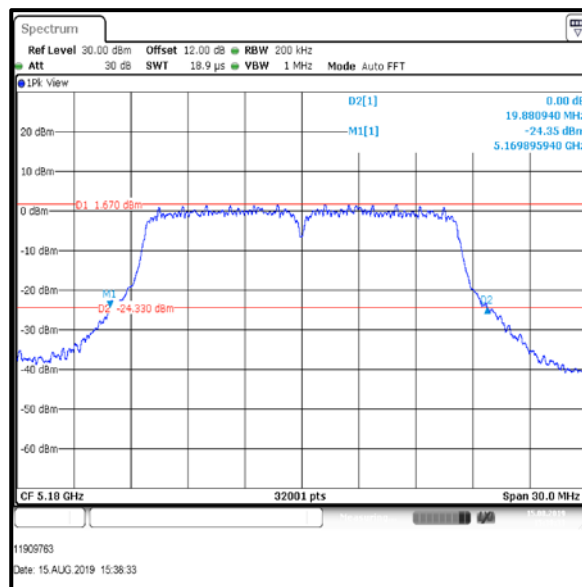
Transmitter 26 dB Emission Bandwidth (continued)**Results: 802.11ac / HT80 / MCS0 / SISO / Port 1 / PWL 15 / 8 dBi Antenna Group**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5210	83.887

**Single Channel****Result: Pass**

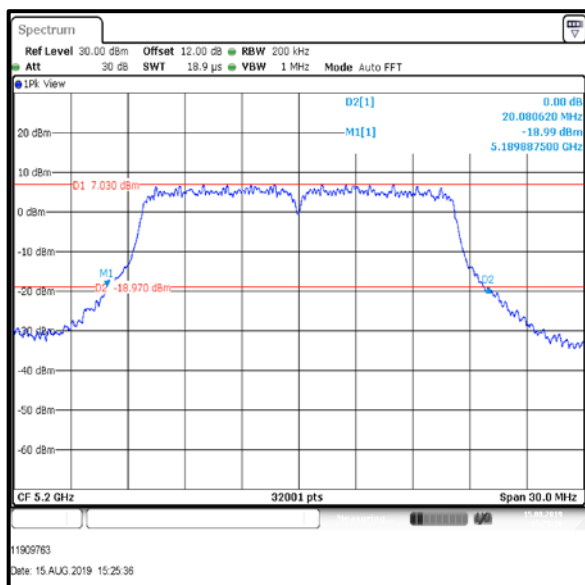
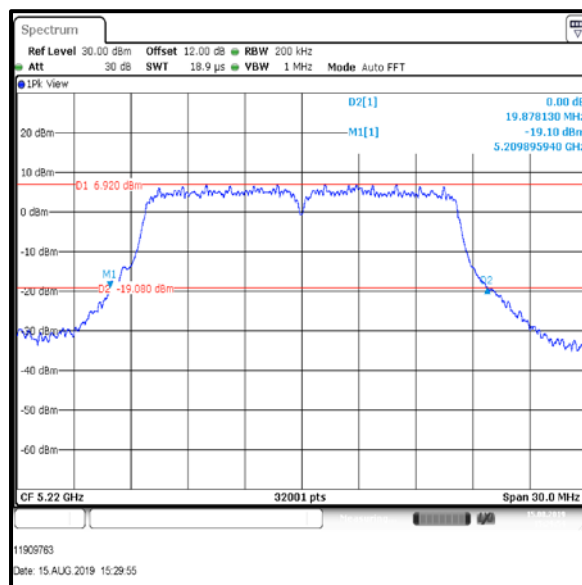
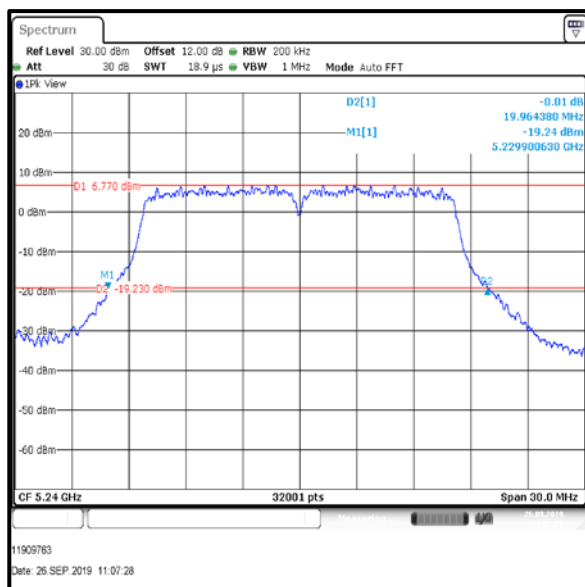
Transmitter 26 dB Emission Bandwidth (continued)**9 dBi Antenna Group****Results: 802.11a / 20 MHz / 6 Mbps / SISO / Port 1 / PWL 12 / 9 dBi Antenna Group**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5180	19.880

**Bottom Channel****Result: Pass**

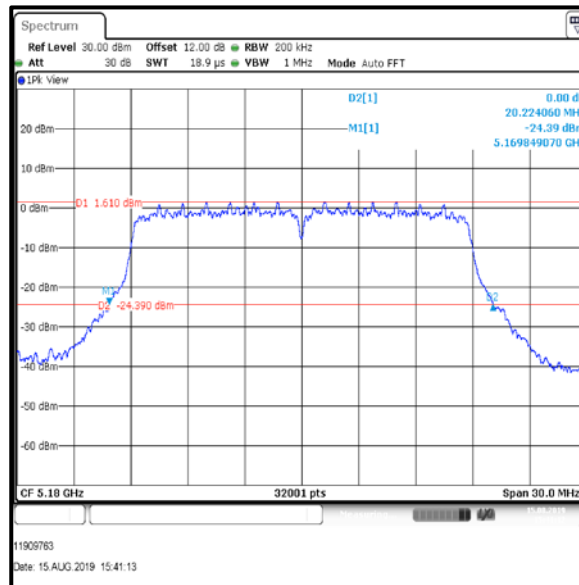
Transmitter 26 dB Emission Bandwidth (continued)**Results: 802.11a / 20 MHz / 6 Mbps / SISO / Port 1 / PWL 17 / 9 dBi Antenna Group**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom +1	5200	20.080
Middle	5220	19.878
Top	5240	19.964

**Bottom +1 Channel****Middle Channel****Top Channel****Result: Pass**

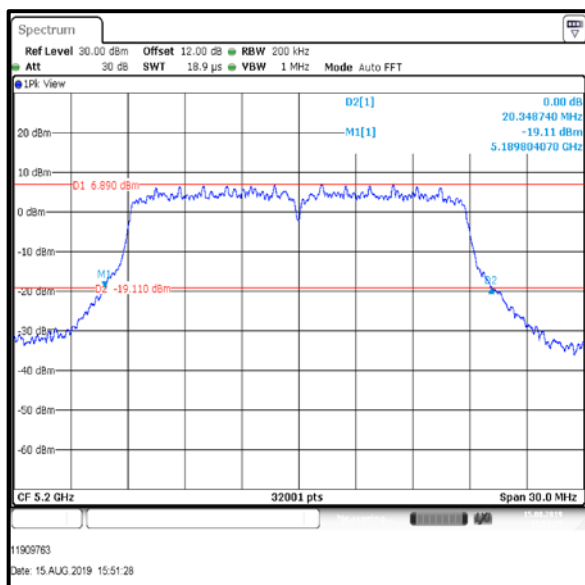
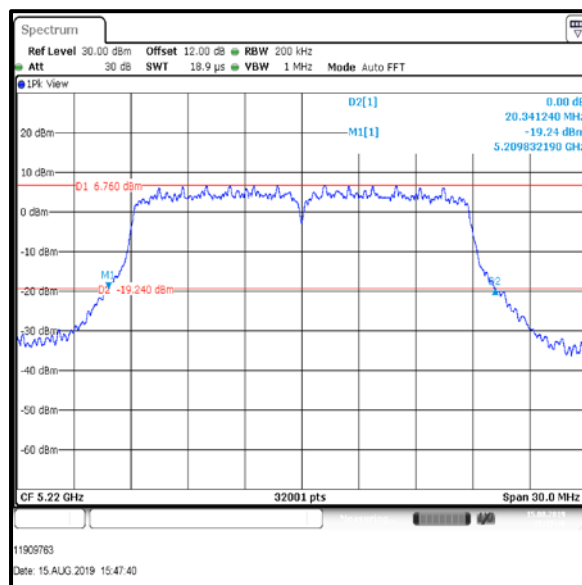
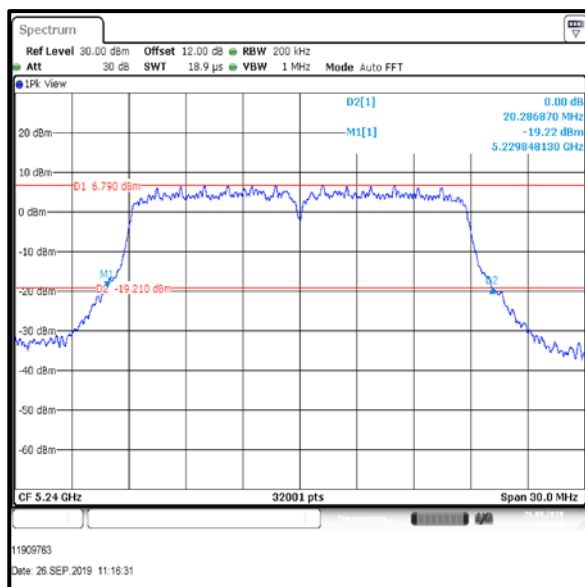
Transmitter 26 dB Emission Bandwidth (continued)**Results: 802.11n / 20 MHz / MCS0 / SISO / Port 1 / PWL 12 / 9 dBi Antenna Group**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5180	20.224

**Bottom Channel****Result: Pass**

Transmitter 26 dB Emission Bandwidth (continued)**Results: 802.11n / 20 MHz / MCS0 / SISO / Port 1 / PWL 17 / 9 dBi Antenna Group**

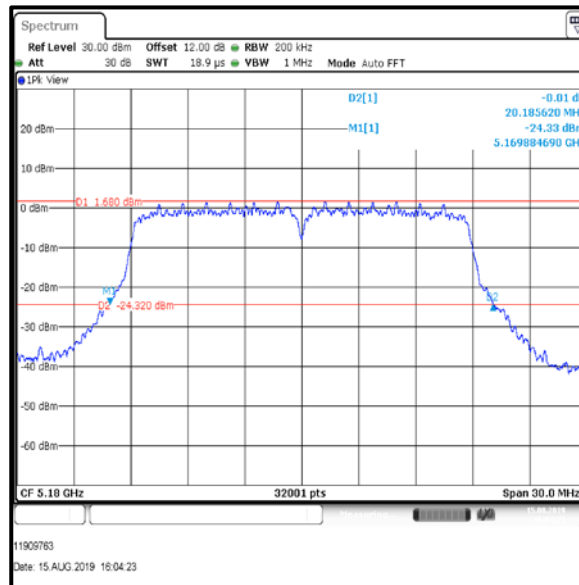
Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom +1	5200	20.349
Middle	5220	20.341
Top	5240	20.287

**Bottom +1 Channel****Middle Channel****Top Channel****Result: Pass**

Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11ac / 20 MHz / MCS0 / SISO / Port 1 / PWL 12 / 9 dBi Antenna Group

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5180	20.186



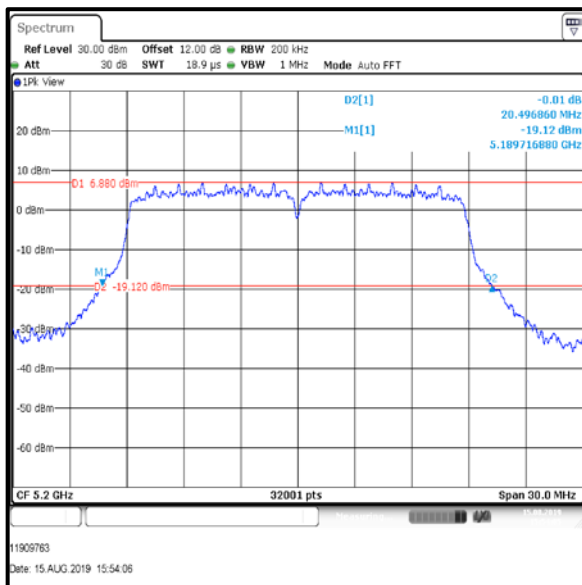
Bottom Channel

Result: Pass

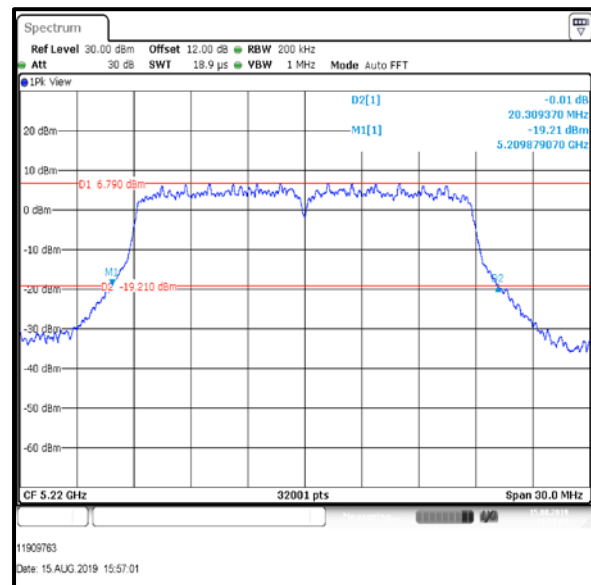
Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11ac / 20 MHz / MCS0 / SISO / Port 1 / PWL 17 / 9 dBi Antenna Group

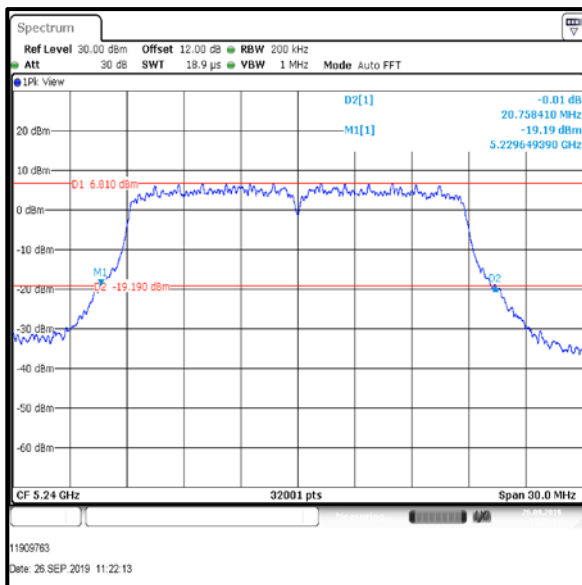
Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom +1	5200	20.497
Middle	5220	20.309
Top	5240	20.758



Bottom +1 Channel



Middle Channel

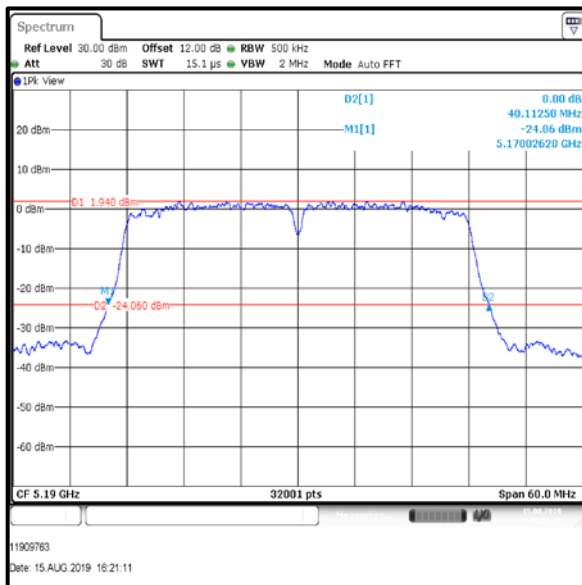


Top Channel

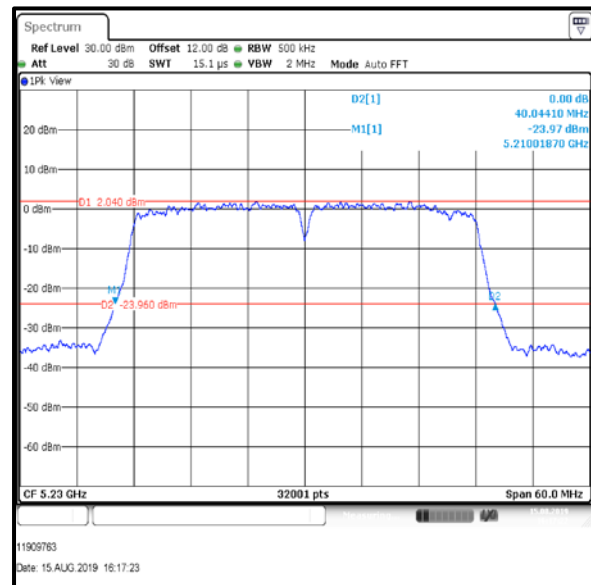
Result: Pass

Transmitter 26 dB Emission Bandwidth (continued)**Results: 802.11n / HT40 / MCS0 / SISO / Port 1 / PWL 12 / 9 dBi Antenna Group**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5190	40.112
Top	5230	40.044



Bottom Channel

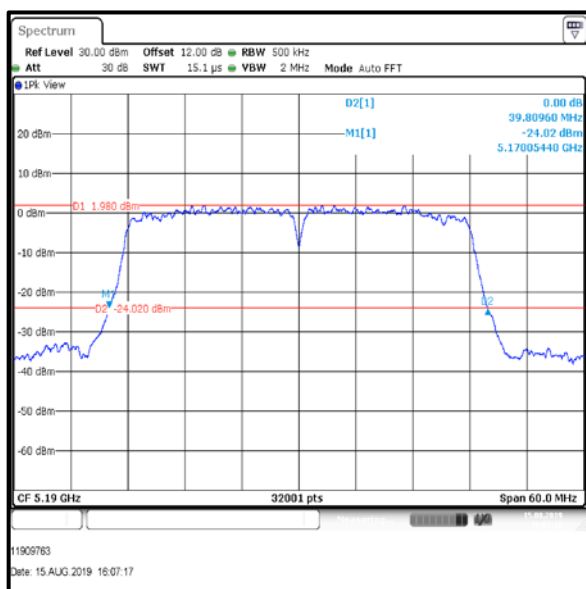


Top Channel

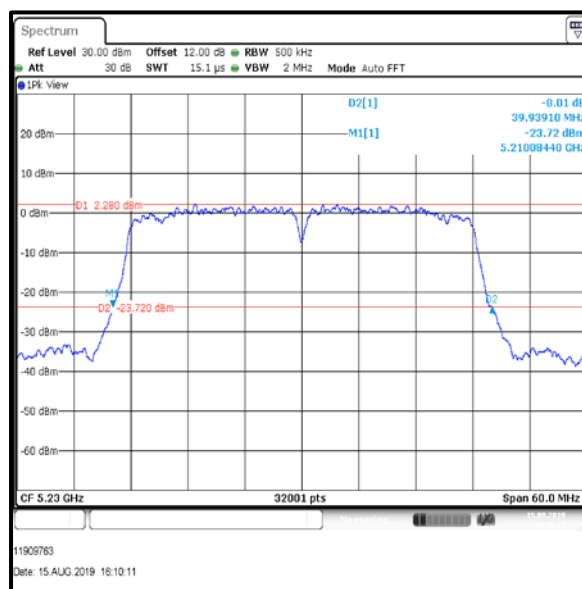
Result: Pass

Transmitter 26 dB Emission Bandwidth (continued)**Results: 802.11ac / HT40 / MCS0 / SISO / Port 1 / PWL 12 / 9 dBi Antenna Group**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5190	39.810
Top	5230	39.939



Bottom Channel

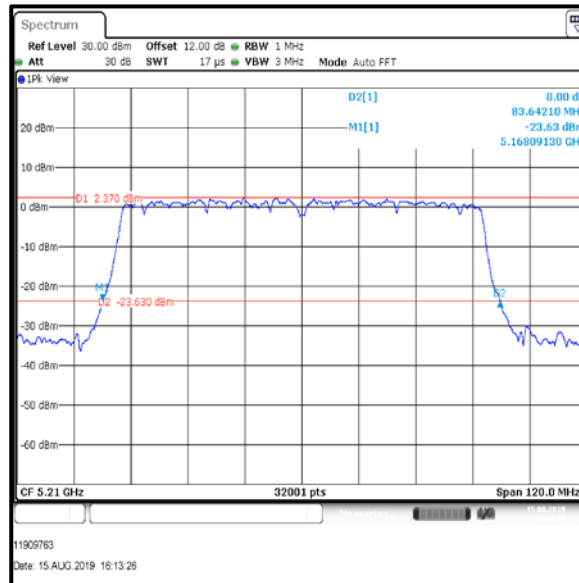


Top Channel

Result: Pass

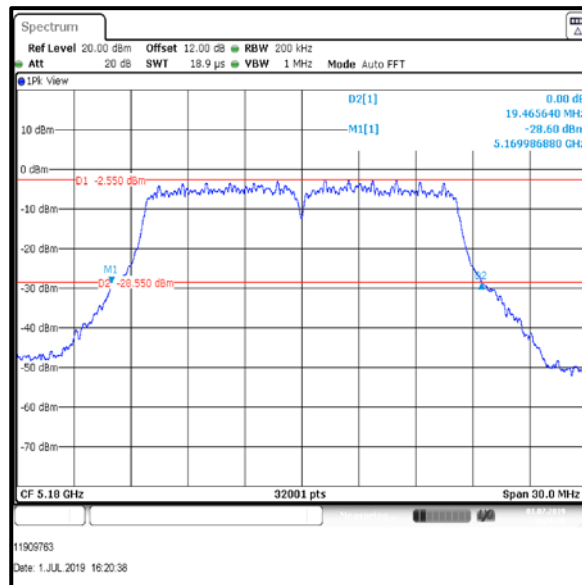
Transmitter 26 dB Emission Bandwidth (continued)**Results: 802.11ac / HT80 / MCS0 / SISO / Port 1 / PWL 12 / 9 dBi Antenna Group**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5210	83.642

**Single Channel****Result: Pass**

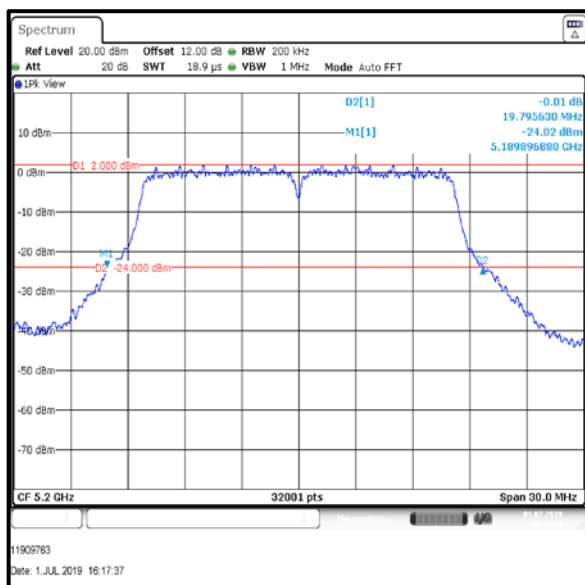
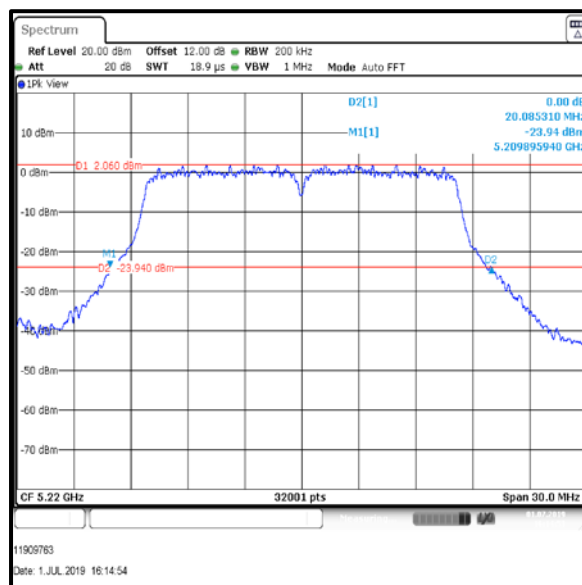
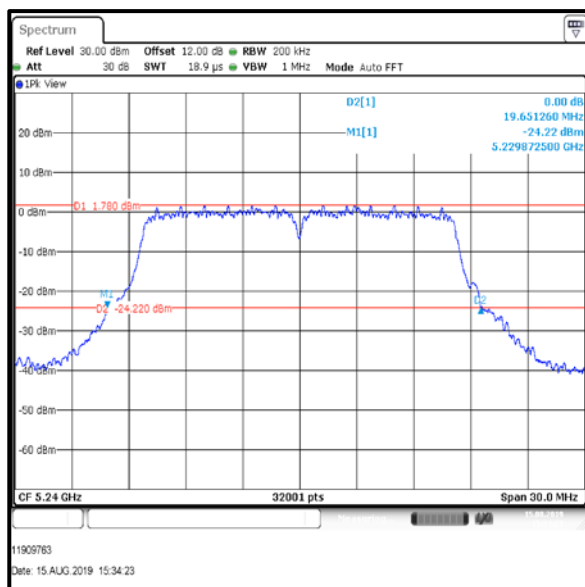
Transmitter 26 dB Emission Bandwidth (continued)**23 dBi Antenna Group****Results: 802.11a / 20 MHz / 6 Mbps / SISO / Port 1 / PWL 7 / 23 dBi Antenna Group**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5180	19.466

**Bottom Channel****Result: Pass**

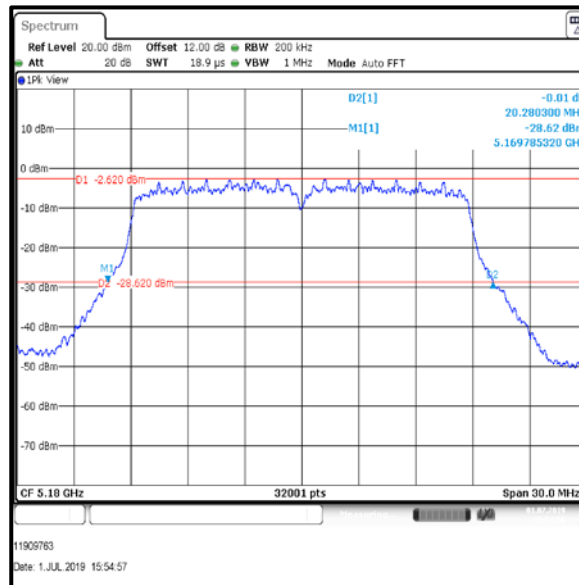
Transmitter 26 dB Emission Bandwidth (continued)**Results: 802.11a / 20 MHz / 6 Mbps / SISO / Port 1 / PWL 13 / 23 dBi Antenna Group**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom +1	5200	19.796
Middle	5220	20.085
Top	5240	19.651

**Bottom +1 Channel****Middle Channel****Top Channel****Result: Pass**

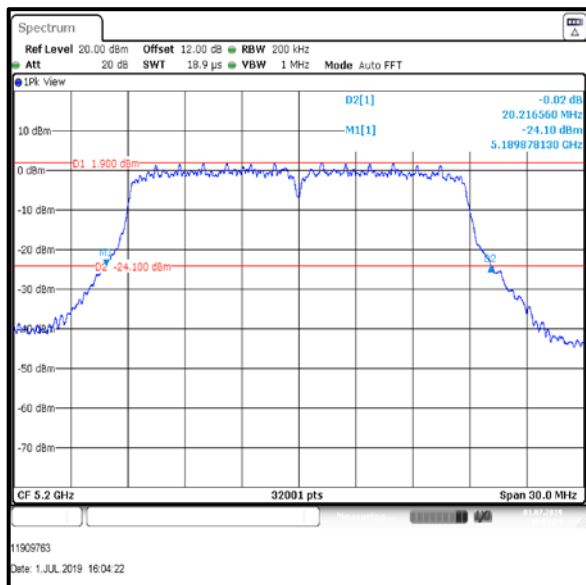
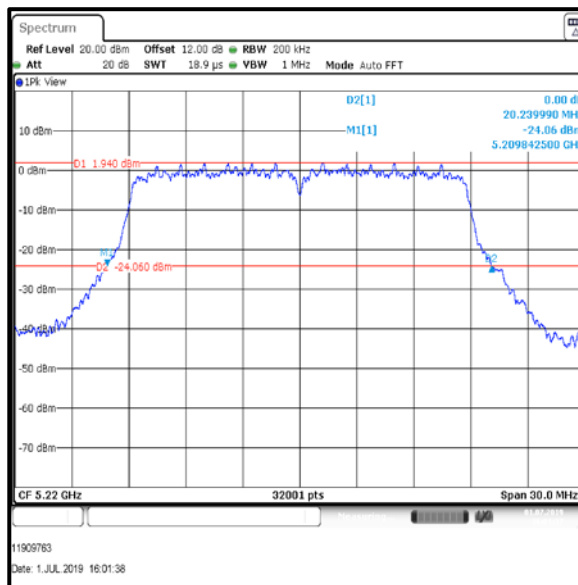
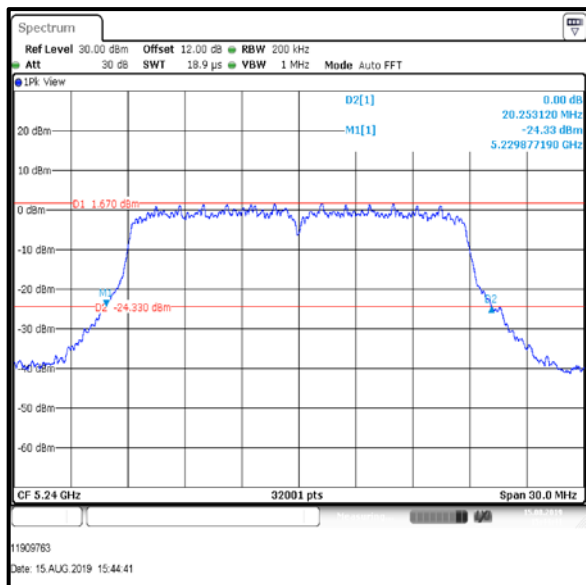
Transmitter 26 dB Emission Bandwidth (continued)**Results: 802.11n / 20 MHz / MCS0 / SISO / Port 1 / PWL 7 / 23 dBi Antenna Group**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5180	20.280

**Bottom Channel****Result: Pass**

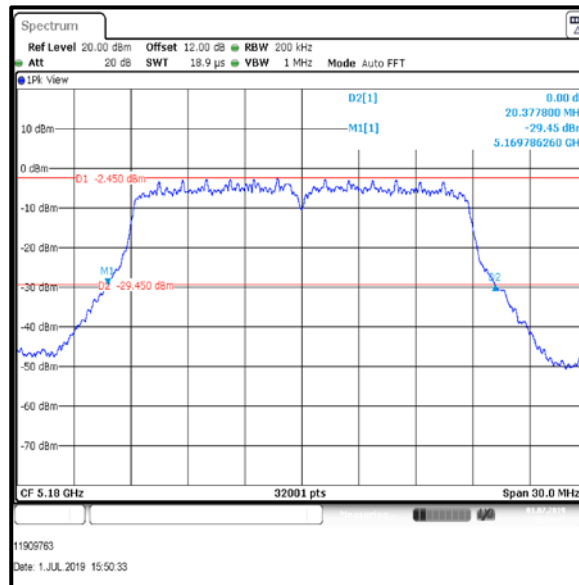
Transmitter 26 dB Emission Bandwidth (continued)**Results: 802.11n / 20 MHz / MCS0 / SISO / Port 1 / PWL 13 / 23dBi Antenna Group**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom +1	5200	20.217
Middle	5220	20.240
Top	5240	20.253

**Bottom +1 Channel****Middle Channel****Top Channel****Result: Pass**

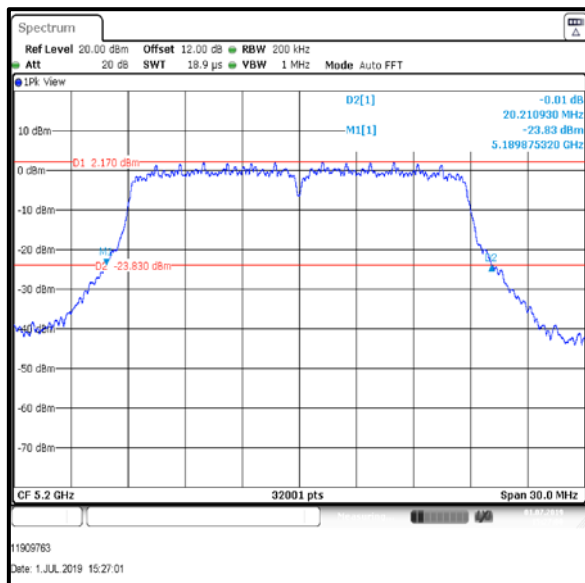
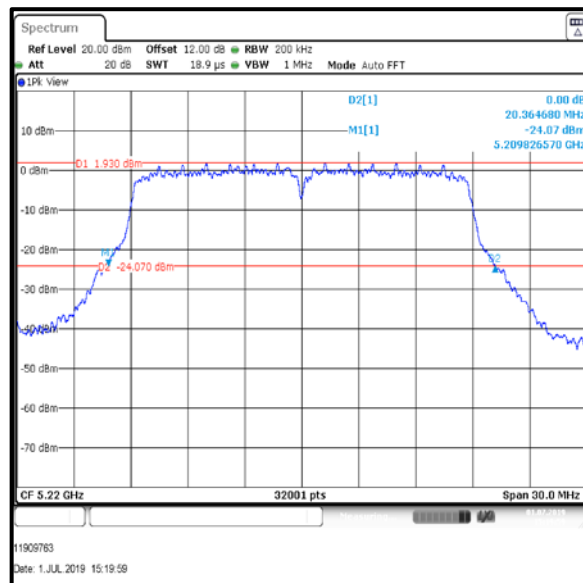
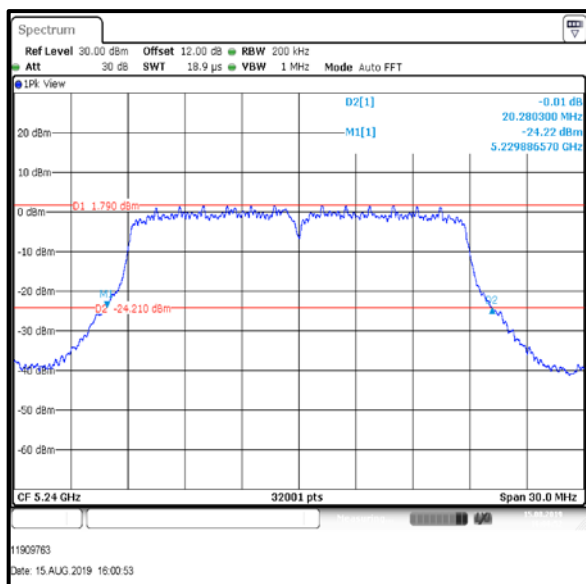
Transmitter 26 dB Emission Bandwidth (continued)**Results: 802.11ac / 20 MHz / MCS0 / SISO / Port 1 / PWL 7 / 23 dBi Antenna Group**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5180	20.378

**Bottom Channel****Result: Pass**

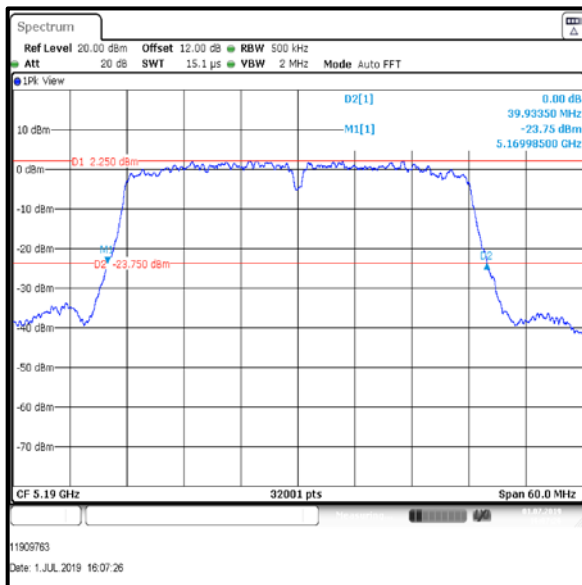
Transmitter 26 dB Emission Bandwidth (continued)**Results: 802.11ac / 20 MHz / MCS0 / SISO / Port 1 / PWL 13 / 23 dBi Antenna Group**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom +1	5200	20.211
Middle	5220	20.365
Top	5240	20.280

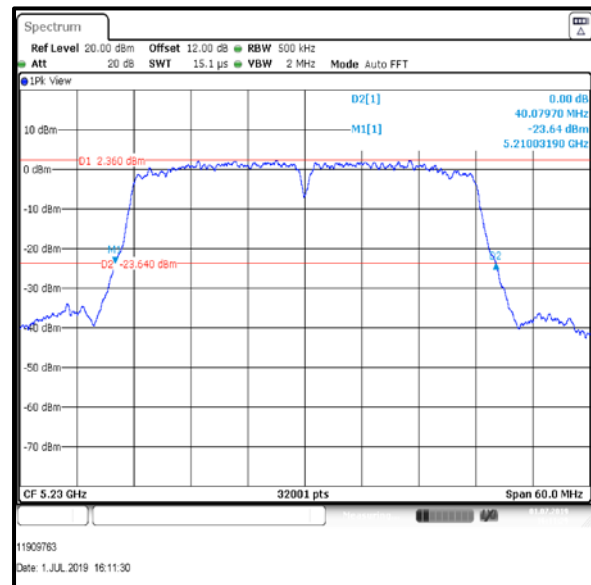
**Bottom +1 Channel****Middle Channel****Top Channel****Result: Pass**

Transmitter 26 dB Emission Bandwidth (continued)**Results: 802.11n / HT40 / MCS0 / SISO / Port 1 / PWL 10 / 23 dBi Antenna Group**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5190	39.933
Top	5230	40.080



Bottom Channel

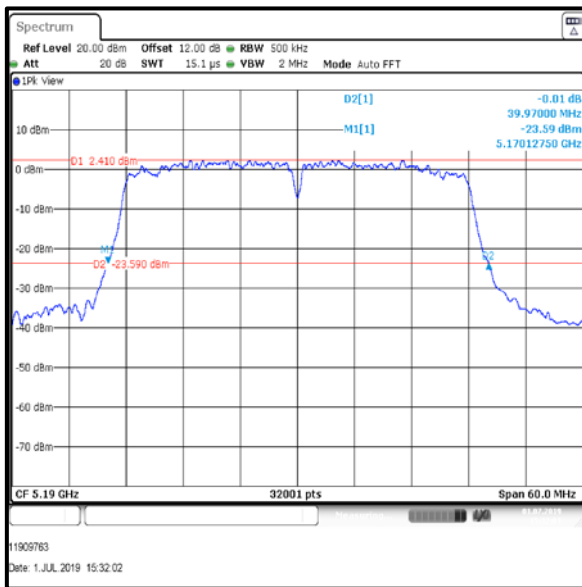


Top Channel

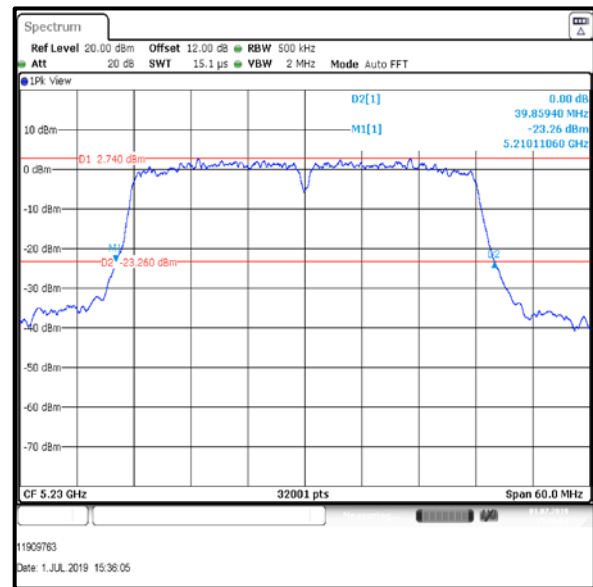
Result: Pass

Transmitter 26 dB Emission Bandwidth (continued)**Results: 802.11ac / HT40 / MCS0 / SISO / Port 1 / PWL 10 / 23 dBi Antenna Group**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5190	39.970
Top	5230	39.859



Bottom Channel

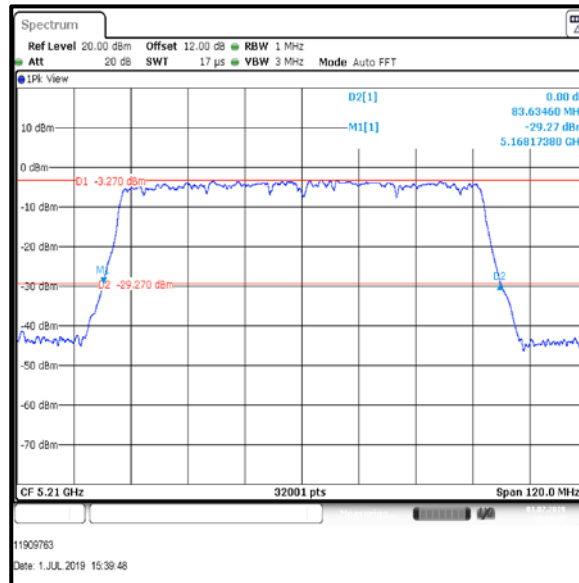


Top Channel

Result: Pass

Transmitter 26 dB Emission Bandwidth (continued)**Results: 802.11ac / HT80 / MCS0 / SISO / Port 1 / PWL 7 / 23 dBi Antenna Group**

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5210	83.635

**Single Channel****Result: Pass**

5.2.3. Transmitter Duty Cycle**Test Summary:**

Test Engineer:	Abdoufataou Salifou	Test Date:	07 November 2018
Test Sample Serial Number:	192.168.0.60		
Test Site Identification	SR 9		

FCC Reference:	Part 15.35(c)
Test Method Used:	KDB 789033 D02 Section II.B.2.b)

Environmental Conditions:

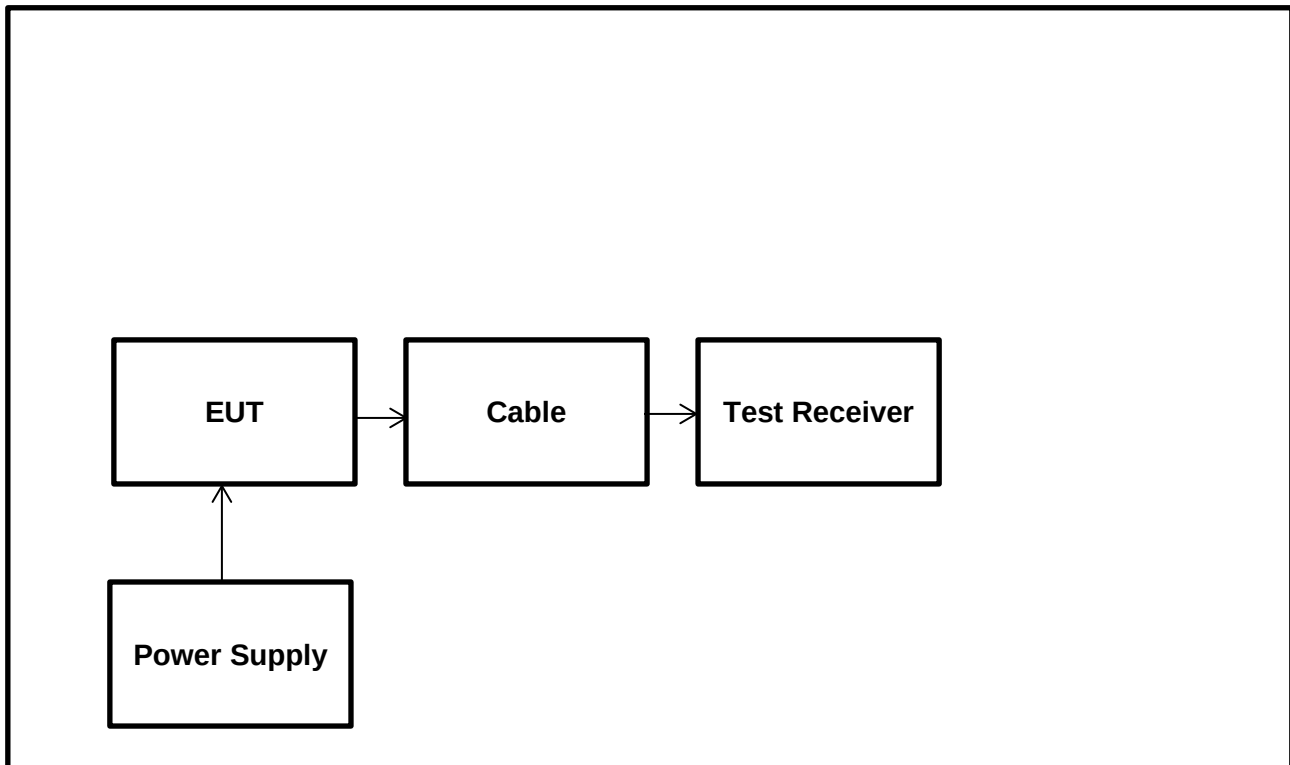
Temperature (°C):	23
Relative Humidity (%):	30

Note:

- During initial investigations it is found that EUT was transmitting with Duty Cycle $\leq 98\%$.
- In order to assist with the determination of the average level of fundamental and spurious emissions field strength, measurements were made of duty cycle to determine the transmission duration and the silent period time of the transmitter. The transmitter duty cycle was measured using a spectrum analyser in the time domain and calculated by using the following calculation:

$$\text{Duty Cycle (\%)} = 100 \times [\text{On Time (T}_{\text{ON}})] / [\text{Period(T}_{\text{ON}} + \text{T}_{\text{OFF}}) \text{ or } 100\text{ms whichever is the lesser}]$$

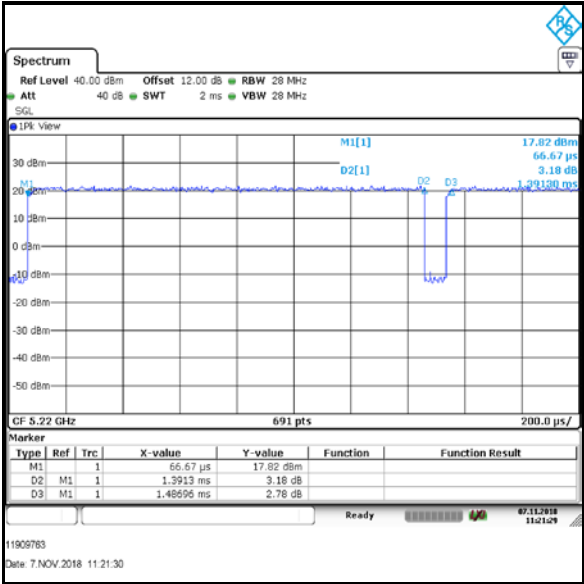
$$\text{Duty Cycle Correction Factor} = 10 \log 1 / [\text{On Time (T}_{\text{ON}})] / [\text{Period(T}_{\text{ON}} + \text{T}_{\text{OFF}}) \text{ or } 100\text{ms whichever is the lesser}]$$
- Duty cycles were measured with worst case SISO mode; as they found to be same independent of number of transmitter chains used.
- These results are valid for all supported SISO & MIMO modes as well as for listed Antenna groups.
- The RF port on the EUT was connected to the spectrum analyser using suitable attenuation and RF cable. The measured values takes into consideration the external attenuation correction factors. The RF cable attenuation (maximum 2.0 dB@5GHz) from the EUT to Analyzer including the 10 dB attenuation at the Spectrum Analyzer input was added as a reference level offset (12.0 dB) to each of the conducted plots.

Transmitter Duty Cycle (continued)**Test Setup:**

Transmitter Duty Cycle (continued)

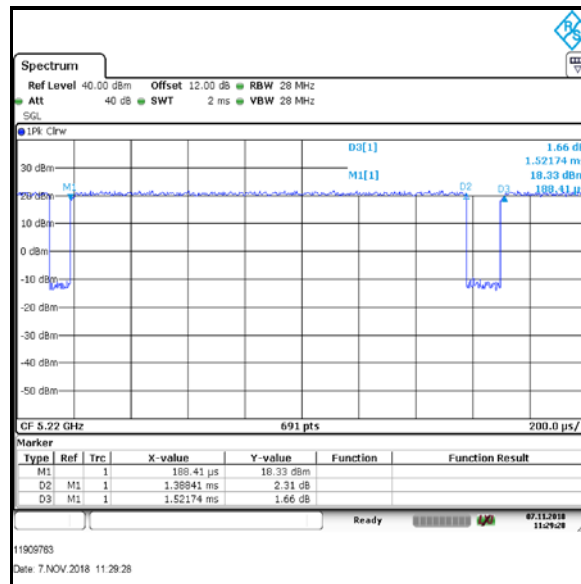
Results: 802.11a / 20 MHz / 6 Mbps

Pulse On Time (T _{ON}) (ms)	Pulse Period (T _{ON} +T _{OFF}) (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
1.391	1.487	93.54	0.3



Transmitter Duty Cycle (continued)**Results: 802.11n / 20 MHz / MCS0**

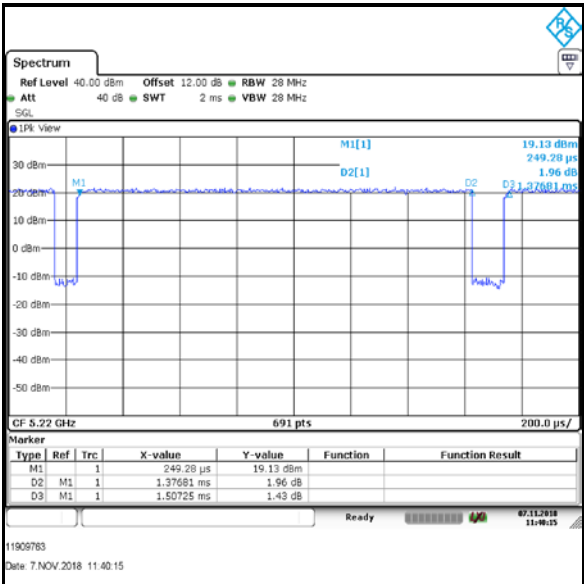
Pulse On Time (T _{ON}) (ms)	Pulse Period (T _{ON} + T _{OFF}) (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
1.388	1.522	91.19	0.5



Transmitter Duty Cycle (continued)

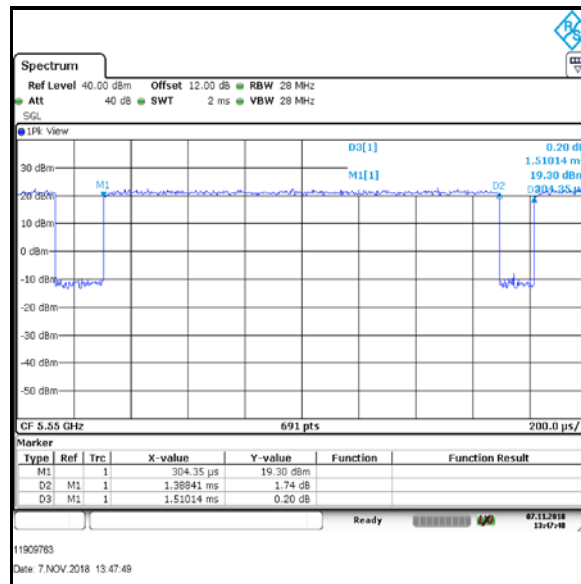
Results: 802.11ac / 20 MHz / MCS0

Pulse On Time (T _{ON}) (ms)	Pulse Period (T _{ON} +T _{OFF}) (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
1.377	1.507	91.37	0.4



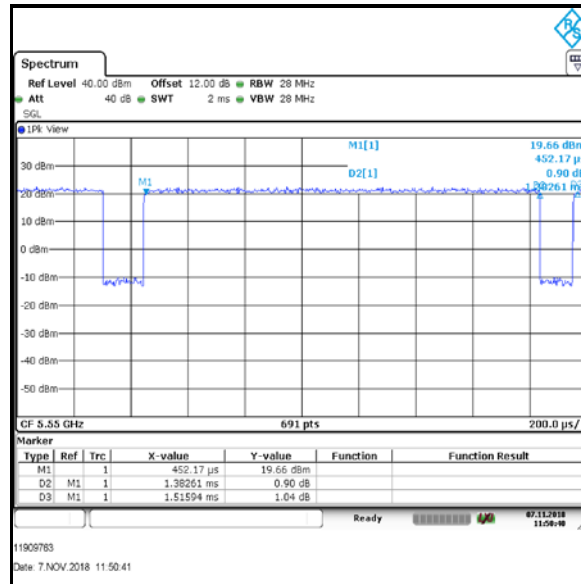
Transmitter Duty Cycle (continued)**Results: 802.11n / 40 MHz / MCS0**

Pulse On Time (T _{ON}) (ms)	Pulse Period (T _{ON} + T _{OFF}) (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
1.388	1.510	91.92	0.4



Transmitter Duty Cycle (continued)**Results: 802.11ac / 40 MHz / MCS0**

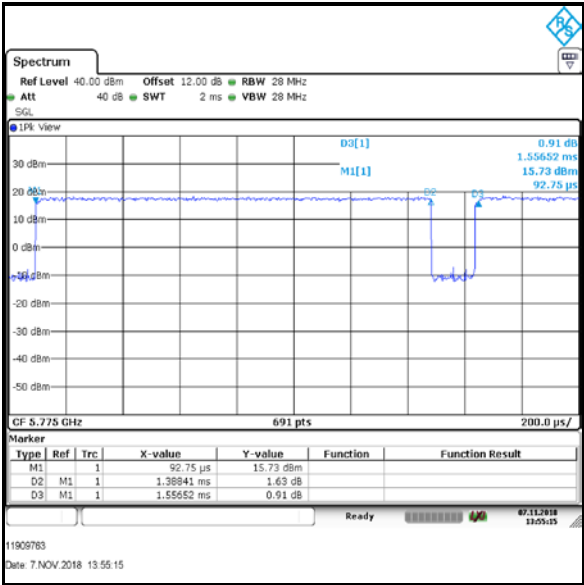
Pulse On Time (T _{ON}) (ms)	Pulse Period (T _{ON} + T _{OFF}) (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
1.383	1.516	91.22	0.4



Transmitter Duty Cycle (continued)

Results: 802.11ac / 80 MHz / MCS0

Pulse On Time (T _{ON}) (ms)	Pulse Period (T _{ON} +T _{OFF}) (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
1.388	1.556	89.20	0.5



5.2.4. Transmitter Maximum Conducted Output Power**Test Summary:**

Test Engineer:	Abdoufataou Salifou	Test Dates:	27 February 2019 to 20 September 2019
Test Sample Serial Number:	192.168.0.60		
Test Site Identification	SR 9		

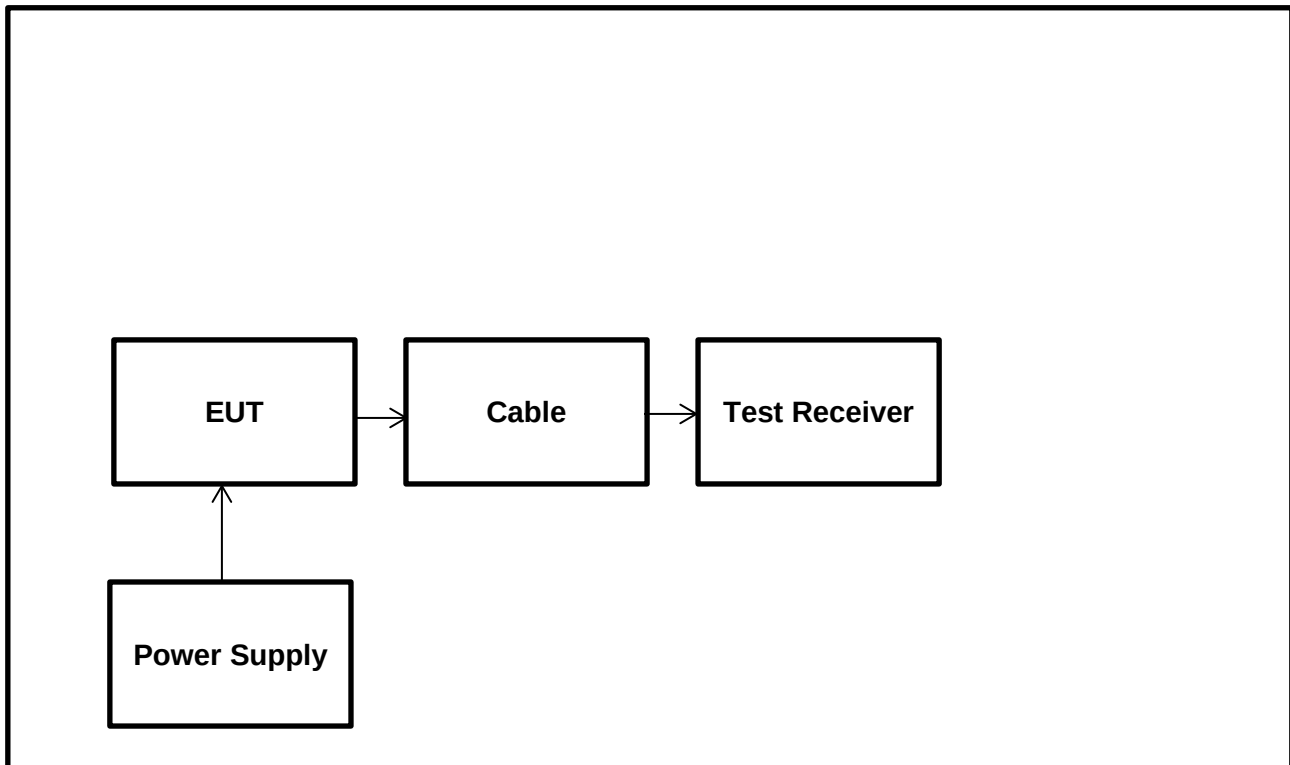
FCC Reference:	Part 15.407(a)(1)(iv)
Test Method Used:	KDB 789033 D02 Section II.E.2.d) KDB 662911 D01 Section E) 1)

Environmental Conditions:

Temperature (°C):	20 to 28
Relative Humidity (%):	27 to 33

Notes:

- For conducted power tests where the duty cycle is <98%, the measurements were performed in accordance with FCC KDB 789033 II.E.2.d) Method SA-2. The signal analyser's integration function was used to integrate across the 99% emission bandwidth. The resolution bandwidth was set to 1 MHz and video bandwidth 3 MHz. An RMS detector was used and sweep time was set to auto and 300 traces performed. The span was set to encompass the entire 99% occupied bandwidth. The channel power results are recorded in the tables below.
- For all data rates the EUT was transmitting at <98% duty cycle, the calculated duty cycle in section 5.2.3 was added to the measured power in order to compute the average power during the actual transmission time.
- The RF port on the EUT was connected to the spectrum analyser using suitable attenuation and RF cable. The measured values takes into consideration the external attenuation correction factors. The RF cable attenuation (maximum 2.0 dB@5GHz) from the EUT to Analyzer including the 10 dB attenuation at the Spectrum Analyzer input was added as a reference level offset (12.0 dB) to each of the conducted plots.
- For MIMO, power was measured across relevant ports and then combined using the measure-and-sum technique stated in FCC KDB 662911 D01 Section E)1).
- The EUT may be used either as Master or as Client WLAN device, so the EUT has been tested to the limits for a client device as these are more stringent.
- The EUT antennas have a directional gain of > 6 dBi.
- In accordance with 15.407(a)(1)(iv), transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power limits shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- Therefore reduced maximum conducted output power limits are as follows:
 - 8 dBi Antenna Group :
 - Therefore the limit of 24 dBm has been reduced by 2 dB to 22 dBm
 - 9 dBi Antenna Group :
 - Therefore the limit of 24 dBm has been reduced by 3 dB to 21 dBm
 - 23 dBi Antenna Group:
 - As per applicant's declaration 23 dBi Antenna shall be only used with RF cable of length 10 m having 8.8 dB Attenuation @ 5 GHz bands.
 - Effective Antenna Gain = 23 dBi – 8.8 dB = 14.2 dBi
 - Therefore the limit of 24 dBm has been reduced by 8.2 dB to 15.8 dBm

Transmitter Maximum Conducted Output Power (continued)**Test Setup:**

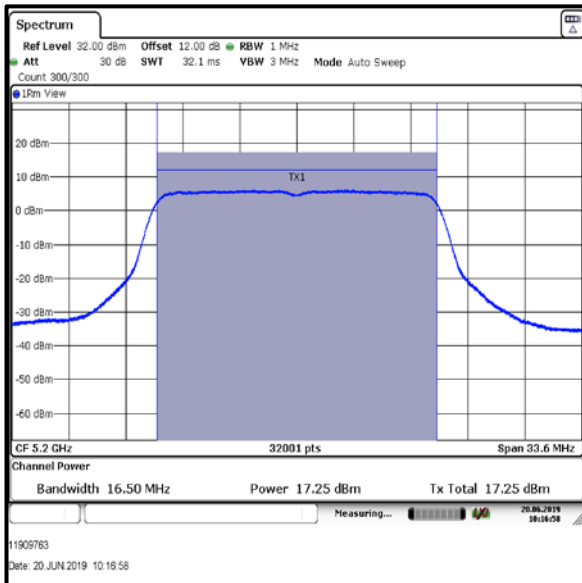
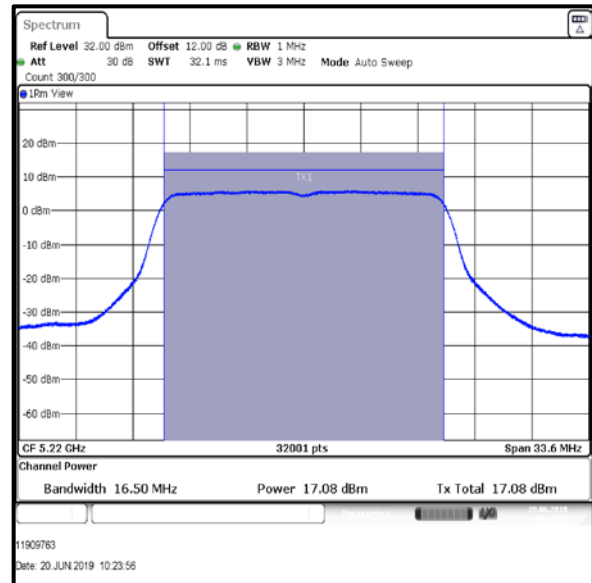
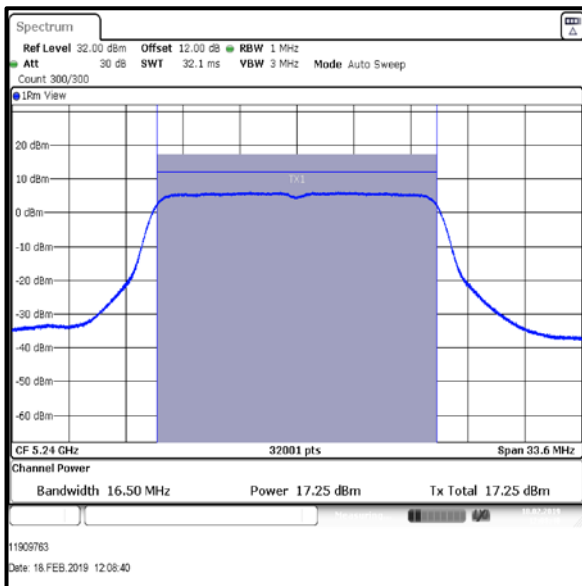
Transmitter Maximum Conducted Output Power (continued)**8 dBi Antenna Group****Results: 802.11a / 20 MHz / 6 Mbps / SISO / Port 1 / PWL 18 / 8 dBi Antenna Group**

Channel	Conducted Power (dBm)	Duty Cycle Correction (dB)	Corrected Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom +1	17.3	0.3	17.6	22.0	4.4	Complied
Middle	17.1	0.3	17.4	22.0	4.6	Complied
Top	17.3	0.3	17.6	22.0	4.4	Complied

De Facto EIRP Limit Comparison

Channel	Corrected Conducted Power (dBm)	Directional Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom +1	17.6	8.0	25.6	30.0	4.4	Complied
Middle	17.4	8.0	25.4	30.0	4.6	Complied
Top	17.6	8.0	25.6	30.0	4.4	Complied

Result: Pass

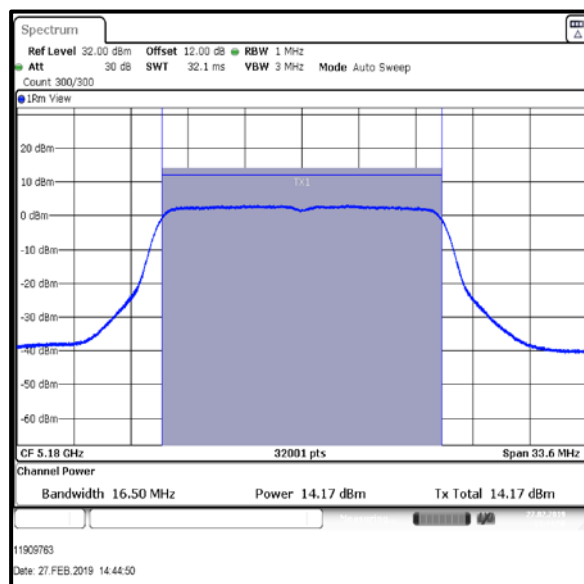
Transmitter Maximum Conducted Output Power (continued)**Results: 802.11a / 20 MHz / 6 Mbps / SISO / Port 1 / PWL 18 / 8 dBi Antenna Group****Bottom +1 Channel****Middle Channel****Top Channel**

Transmitter Maximum Conducted Output Power (continued)**Results: 802.11a / 20 MHz / 6 Mbps / SISO / Port 1 / PWL 15 / 8 dBi Antenna Group**

Channel	Conducted Power (dBm)	Duty Cycle Correction (dB)	Corrected Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	14.2	0.3	14.5	22.0	7.5	Complied

De Facto EIRP Limit Comparison

Channel	Corrected Conducted Power (dBm)	Directional Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom	14.5	8.0	22.5	30.0	7.5	Complied

**Bottom Channel****Result: Pass**

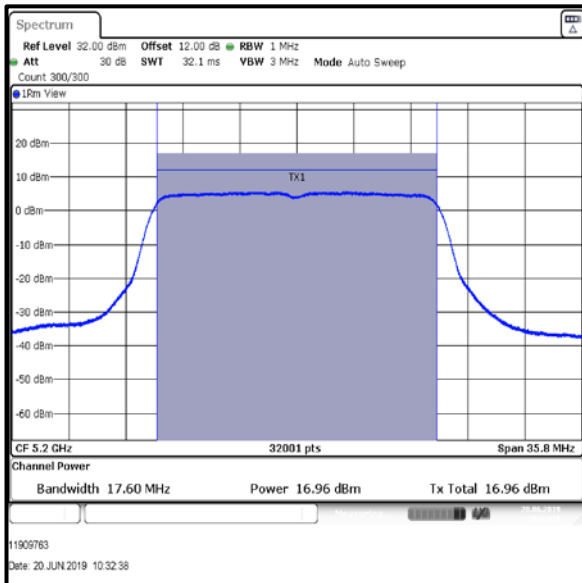
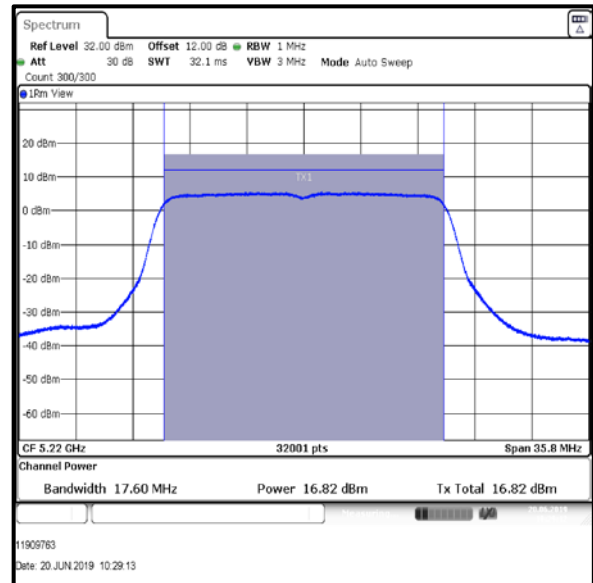
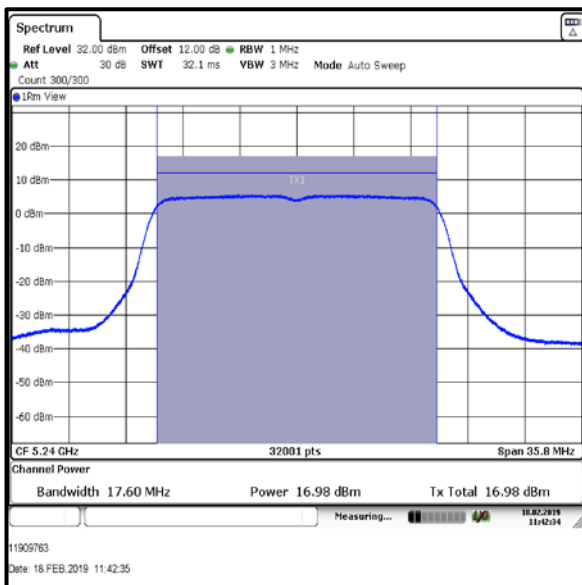
Transmitter Maximum Conducted Output Power (continued)**Results: 802.11n / 20 MHz / MCS0 / SISO / Port 1 / PWL 18 / 8 dBi Antenna Group**

Channel	Conducted Power (dBm)	Duty Cycle Correction (dB)	Corrected Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom +1	17.0	0.5	17.5	22.0	4.5	Complied
Middle	16.8	0.5	17.3	22.0	4.7	Complied
Top	17.0	0.5	17.5	22.0	4.5	Complied

De Facto EIRP Limit Comparison

Channel	Corrected Conducted Power (dBm)	Directional Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom +1	17.5	8.0	25.5	30.0	4.5	Complied
Middle	17.3	8.0	25.3	30.0	4.7	Complied
Top	17.5	8.0	25.5	30.0	4.5	Complied

Result: Pass

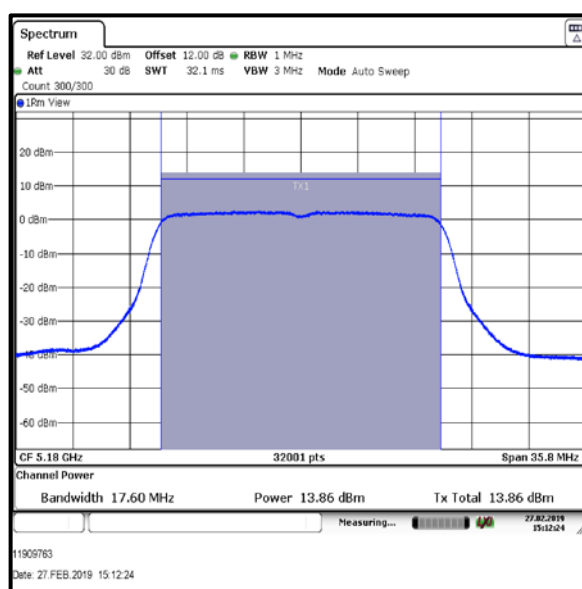
Transmitter Maximum Conducted Output Power (continued)**Results: 802.11n / 20 MHz / MCS0 / SISO / Port 1 / PWL 18 / 8 dBi Antenna Group****Bottom +1 Channel****Middle Channel****Top Channel**

Transmitter Maximum Conducted Output Power (continued)**Results: 802.11n / 20 MHz / MCS0 / SISO / Port 1 / PWL 15 / 8 dBi Antenna Group**

Channel	Conducted Power (dBm)	Duty Cycle Correction (dB)	Corrected Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	13.9	0.5	14.4	22.0	7.6	Complied

De Facto EIRP Limit Comparison

Channel	Corrected Conducted Power (dBm)	Directional Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom	14.4	8.0	22.4	30.0	7.6	Complied

**Bottom Channel****Result: Pass**

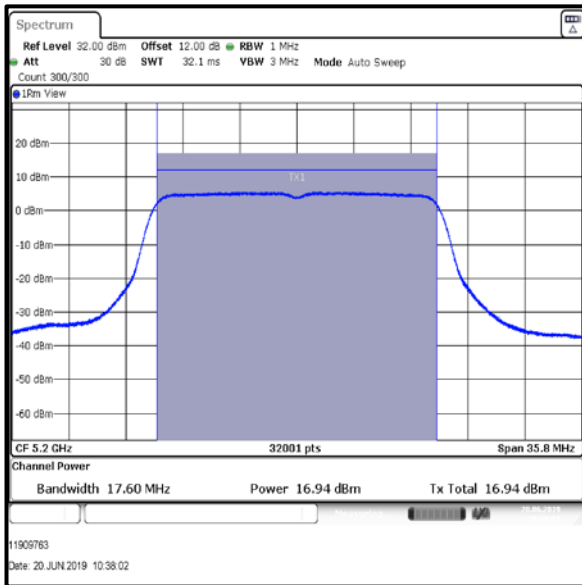
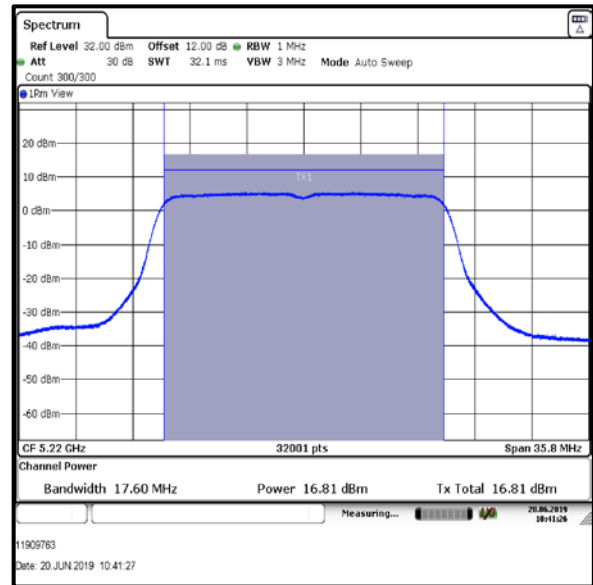
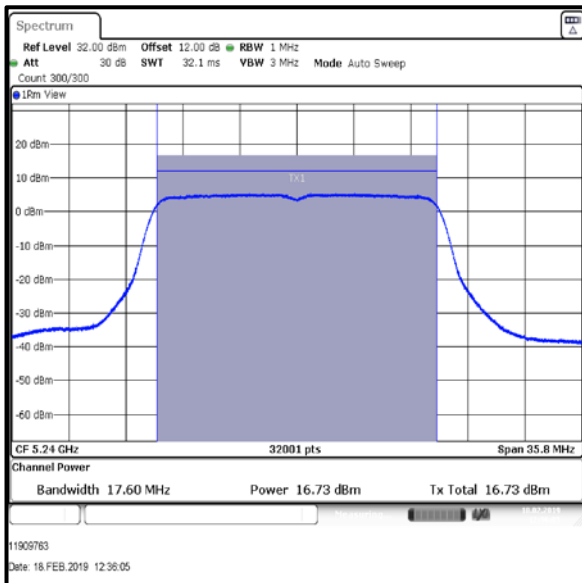
Transmitter Maximum Conducted Output Power (continued)**Results: 802.11ac / 20 MHz / MCS0 / SISO / Port 1 / PWL 18 / 8 dBi Antenna Group**

Channel	Conducted Power (dBm)	Duty Cycle Correction (dB)	Corrected Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom +1	16.9	0.4	17.3	22.0	4.7	Complied
Middle	16.8	0.4	17.2	22.0	4.8	Complied
Top	16.7	0.4	17.1	22.0	8.2	Complied

De Facto EIRP Limit Comparison

Channel	Corrected Conducted Power (dBm)	Directional Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom +1	17.2	8.0	25.2	30.0	4.8	Complied
Middle	17.3	8.0	25.3	30.0	4.7	Complied
Top	17.1	8.0	25.1	30.0	4.9	Complied

Result: Pass

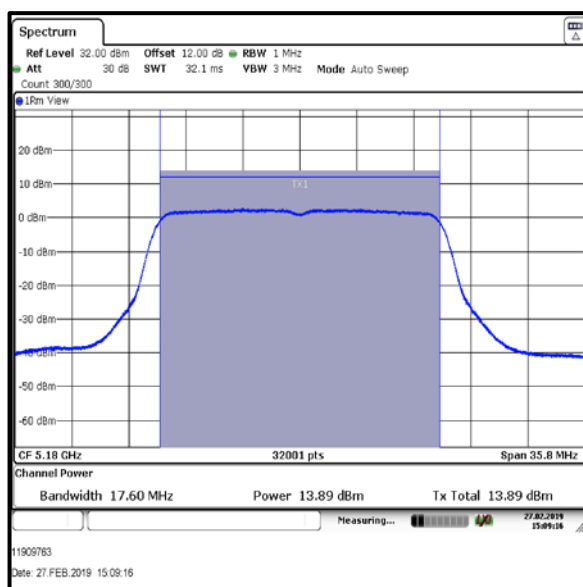
Transmitter Maximum Conducted Output Power (continued)**Results: 802.11ac / 20 MHz / MCS0 / SISO / Port 1 / PWL 18 / 8 dBi Antenna Group****Bottom +1 Channel****Middle Channel****Top Channel**

Transmitter Maximum Conducted Output Power (continued)**Results: 802.11ac / 20 MHz / MCS0 / SISO / Port 1 / PWL 15 / 8 dBi Antenna Group**

Channel	Conducted Power (dBm)	Duty Cycle Correction (dB)	Corrected Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	13.9	0.4	14.3	22.0	7.7	Complied

De Facto EIRP Limit Comparison

Channel	Corrected Conducted Power (dBm)	Directional Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom	14.3	8.0	22.3	30.0	7.7	Complied

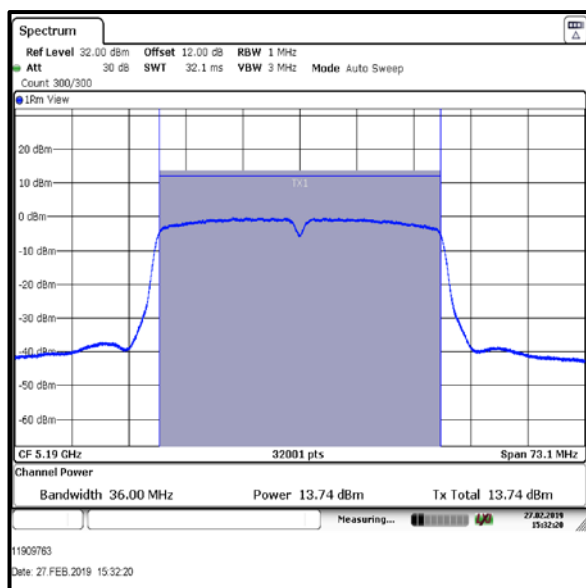
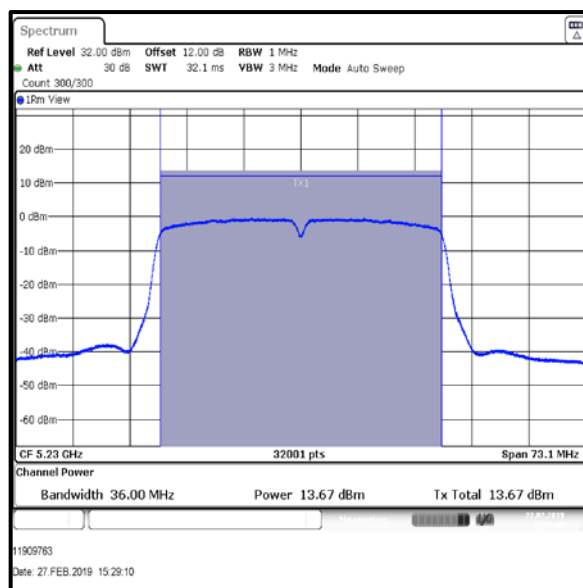
**Bottom Channel****Result: Pass**

Transmitter Maximum Conducted Output Power (continued)**Results: 802.11n / HT40 / MCS0 / SISO / Port 1 / PWL 15 / 8 dBi Antenna Group**

Channel	Conducted Power (dBm)	Duty Cycle Correction (dB)	Corrected Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	13.7	0.4	14.1	22.0	7.9	Complied
Top	13.7	0.4	14.1	22.0	7.9	Complied

De Facto EIRP Limit Comparison

Channel	Corrected Conducted Power (dBm)	Directional Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom	14.1	8.0	22.1	30.0	7.9	Complied
Top	14.1	8.0	22.1	30.0	7.9	Complied

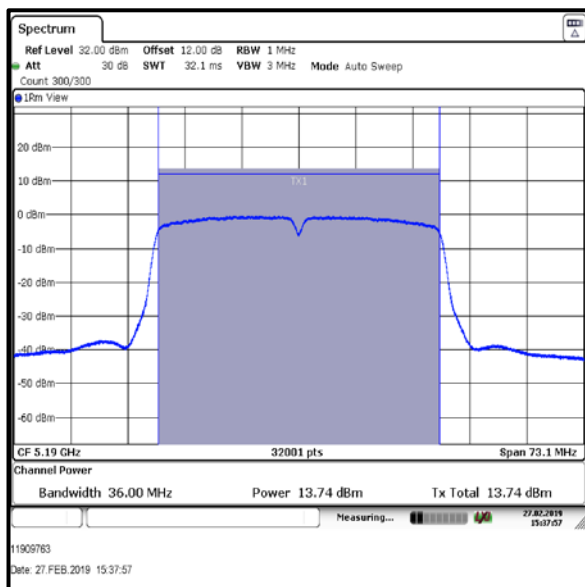
**Bottom Channel****Top Channel****Result: Pass**

Transmitter Maximum Conducted Output Power (continued)**Results: 802.11ac / HT40 / MCS0 / SISO / Port 1 / PWL 15 / 8 dBi Antenna Group**

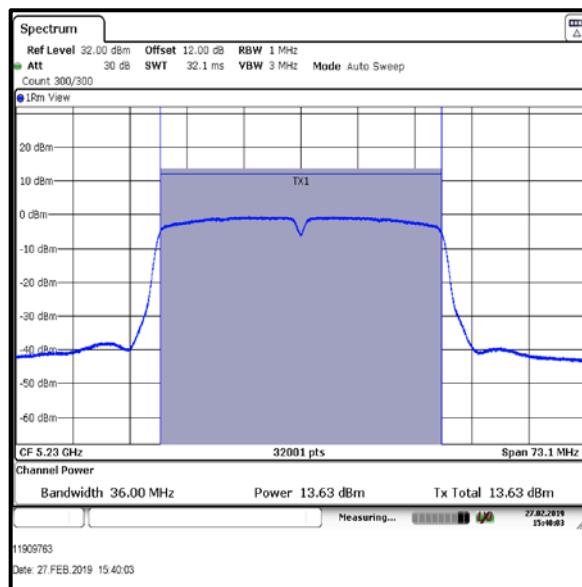
Channel	Conducted Power (dBm)	Duty Cycle Correction (dB)	Corrected Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	13.7	0.4	14.1	22.0	7.9	Complied
Top	13.6	0.4	14.0	22.0	8.0	Complied

De Facto EIRP Limit Comparison

Channel	Corrected Conducted Power (dBm)	Directional Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom	14.1	8.0	22.1	30.0	7.9	Complied
Top	14.0	8.0	22.0	30.0	8.0	Complied



Bottom Channel



Top Channel

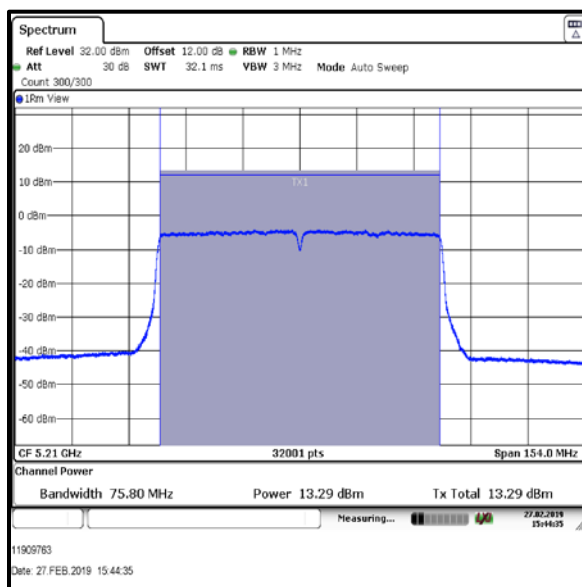
Result: Pass

Transmitter Maximum Conducted Output Power (continued)**Results: 802.11ac / HT80 / MCS0 / SISO / Port 1 / PWL 15 / 8 dBi Antenna Group**

Channel	Frequency (MHz)	Conducted Power (dBm)	Duty Cycle Correction (dB)	Corrected Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Single	5210	13.3	0.5	13.8	22.0	8.2	Complied

De Facto EIRP Limit Comparison

Channel	Corrected Conducted Power (dBm)	Directional Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Single	13.8	8.0	21.8	30.0	8.2	Complied

**Single Channel****Result: Pass**

Transmitter Maximum Conducted Output Power (continued)**Results: 802.11a / 20 MHz / 6Mbps / MIMO / Port 1+2 / PWL 17 / 8 dBi Antenna Group**

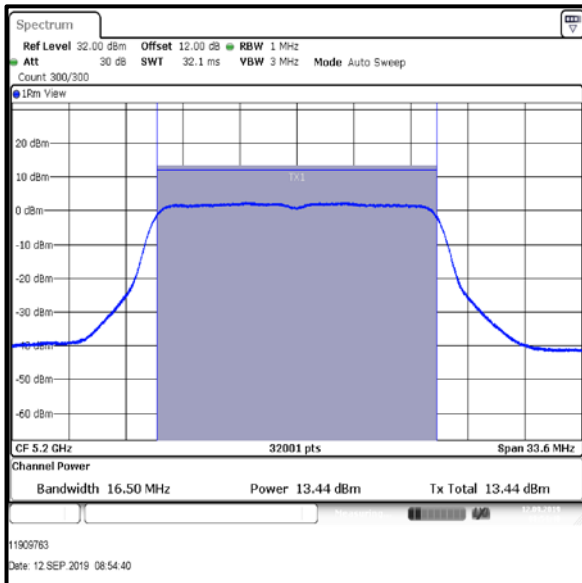
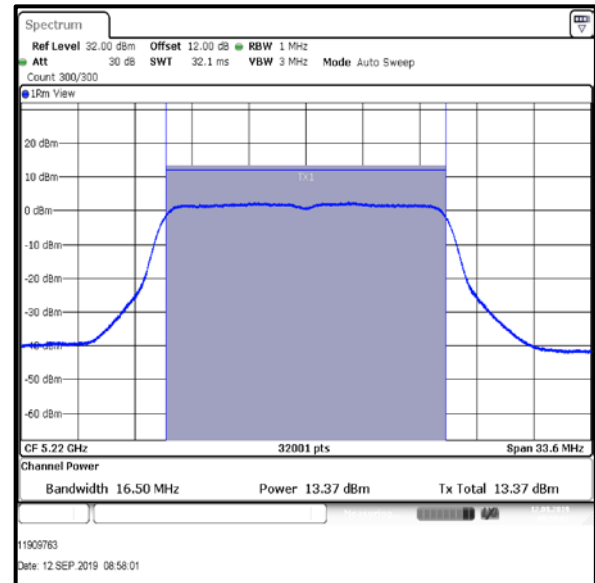
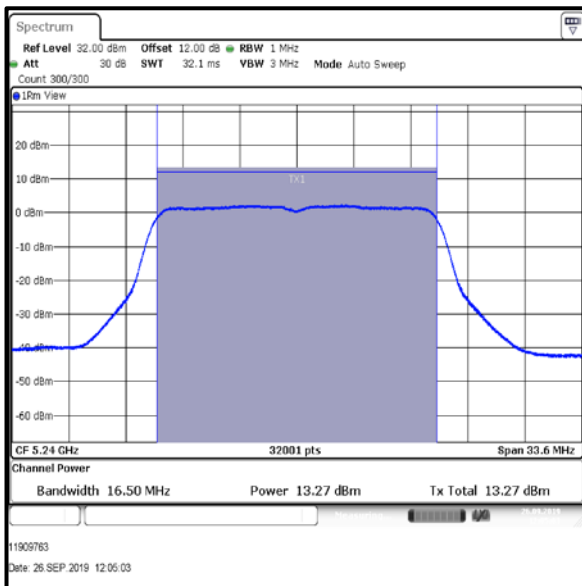
Channel	Port 1			Port 2		
	Conducted Power (dBm)	Duty Cycle Correction (dB)	Corrected Conducted Power (dBm)	Conducted Power (dBm)	Duty Cycle Correction (dB)	Corrected Conducted Power (dBm)
Bottom +1	13.4	0.3	13.7	13.3	0.3	13.6
Middle	13.4	0.3	13.7	13.2	0.3	13.5
Top	13.3	0.3	13.6	13.1	0.3	13.4

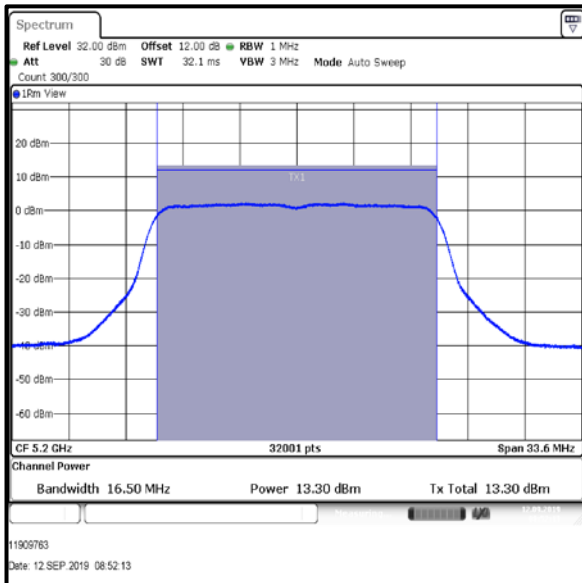
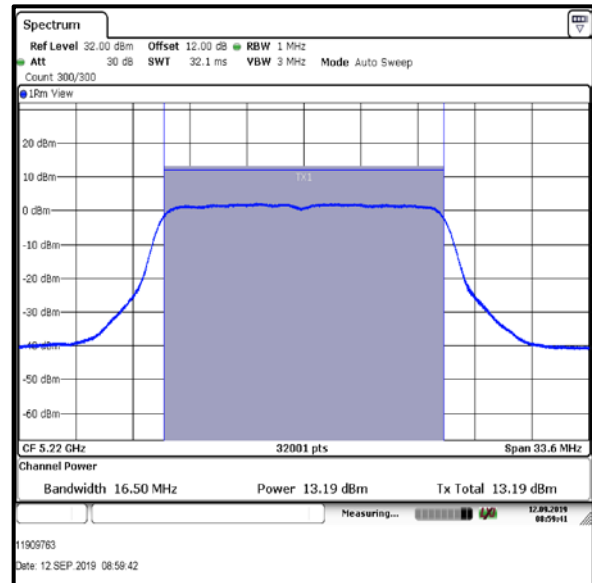
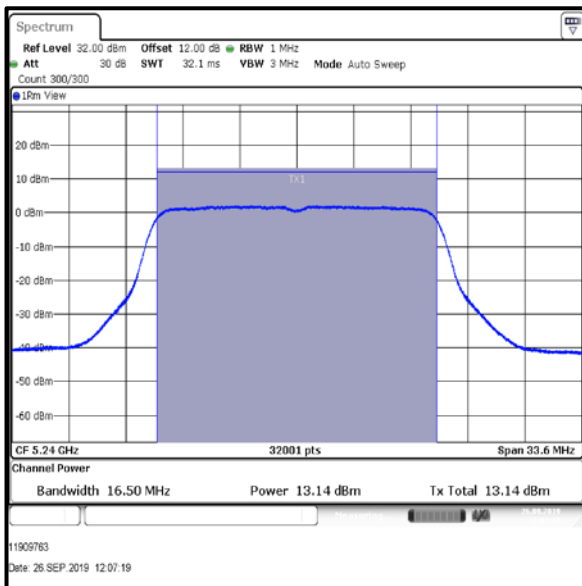
Channel	Corrected Conducted Power Port 1 (dBm)	Corrected Conducted Power Port 2 (dBm)	Port 1+2 Combined Conducted Power (dBm)	Conducted Power Limit (dBm)	Margin (dB)	Result
Bottom +1	13.7	13.6	16.7	22.0	5.3	Complied
Middle	13.7	13.5	16.6	22.0	5.4	Complied
Top	13.6	13.4	16.5	22.0	5.5	Complied

De Facto EIRP Limit Comparison

Channel	Port 1+2 Combined Conducted Power (dBm)	Directional Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom +1	16.7	8.0	24.7	30.0	5.3	Complied
Middle	16.6	8.0	24.6	30.0	5.4	Complied
Top	16.5	8.0	24.5	30.0	5.5	Complied

Result: Pass

Transmitter Maximum Conducted Output Power (continued)**Results: 802.11a / 20 MHz / 6Mbps / MIMO / Port 1 / PWL 17 / 8 dBi Antenna Group****Bottom +1 Channel****Middle Channel****Top Channel**

Transmitter Maximum Conducted Output Power (continued)**Results: 802.11a / 20 MHz / 6Mbps / MIMO / Port 2 / PWL 17 / 8 dBi Antenna Group****Bottom +1 Channel****Middle Channel****Top Channel**

Transmitter Maximum Conducted Output Power (continued)**Results: 802.11a / 20 MHz / 6Mbps / MIMO / Port 1+2 / PWL 16 / 8 dBi Antenna Group**

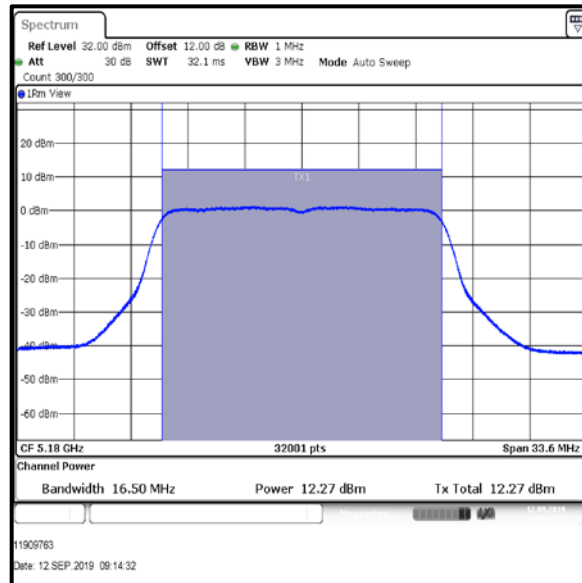
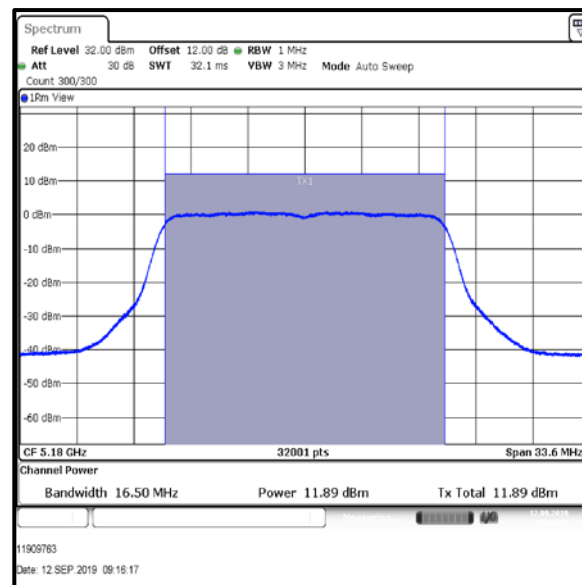
Channel	Port 1			Port 2		
	Conducted Power (dBm)	Duty Cycle Correction (dB)	Corrected Conducted Power (dBm)	Conducted Power (dBm)	Duty Cycle Correction (dB)	Corrected Conducted Power (dBm)
Bottom	12.3	0.3	12.6	11.9	0.3	12.2

Channel	Corrected Conducted Power Port 1 (dBm)	Corrected Conducted Power Port 2 (dBm)	Port 1+2 Combined Conducted Power (dBm)	Conducted Power Limit (dBm)	Margin (dB)	Result
Bottom	12.6	12.2	15.4	22.0	6.6	Complied

De Facto EIRP Limit Comparison

Channel	Port 1+2 Combined Conducted Power (dBm)	Directional Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom	15.4	8.0	23.4	30.0	6.6	Complied

Result: Pass

Transmitter Maximum Conducted Output Power (continued)**Results: 802.11a / 20 MHz / 6Mbps / MIMO / Port 1 / PWL 16 / 8 dBi Antenna Group****Bottom Channel****Results: 802.11a / 20 MHz / 6Mbps / MIMO / Port 2 / PWL 16 / 8 dBi Antenna Group****Bottom Channel**

Transmitter Maximum Conducted Output Power (continued)**Results: 802.11n / 20 MHz / MCS0 / MIMO / Port 1+2 / PWL 17 / 8 dBi Antenna Group**

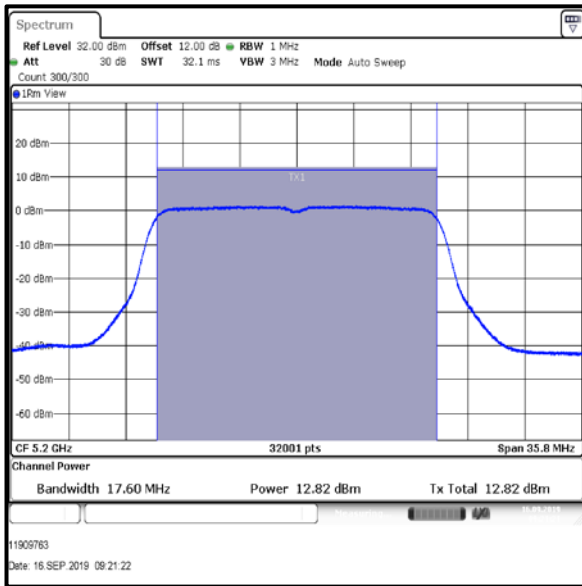
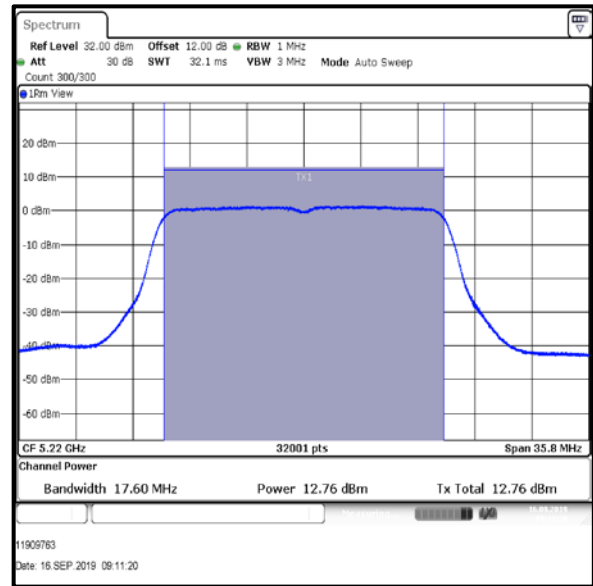
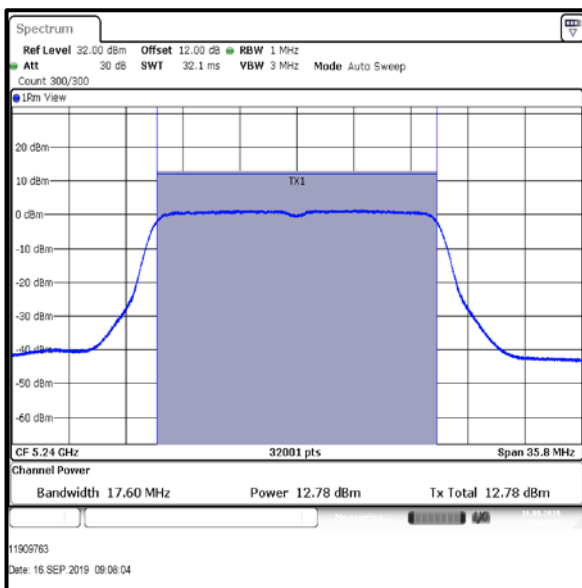
Channel	Port 1			Port 2		
	Conducted Power (dBm)	Duty Cycle Correction (dB)	Corrected Conducted Power (dBm)	Conducted Power (dBm)	Duty Cycle Correction (dB)	Corrected Conducted Power (dBm)
Bottom +1	12.8	0.5	13.3	12.7	0.5	13.2
Middle	12.8	0.5	13.3	12.7	0.5	13.2
Top	12.8	0.3	13.1	12.7	0.3	13.0

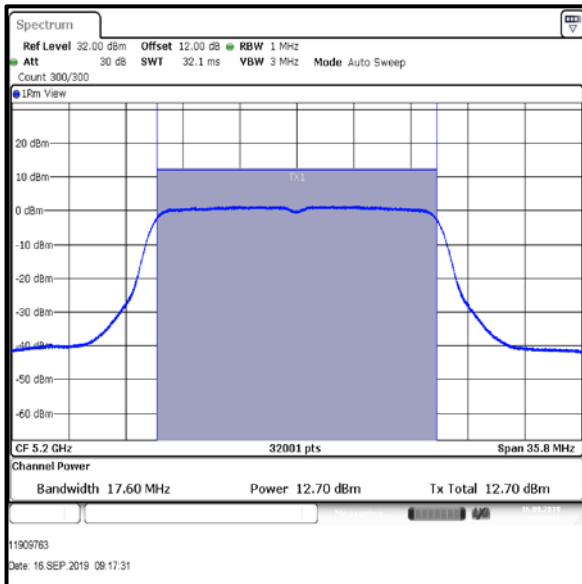
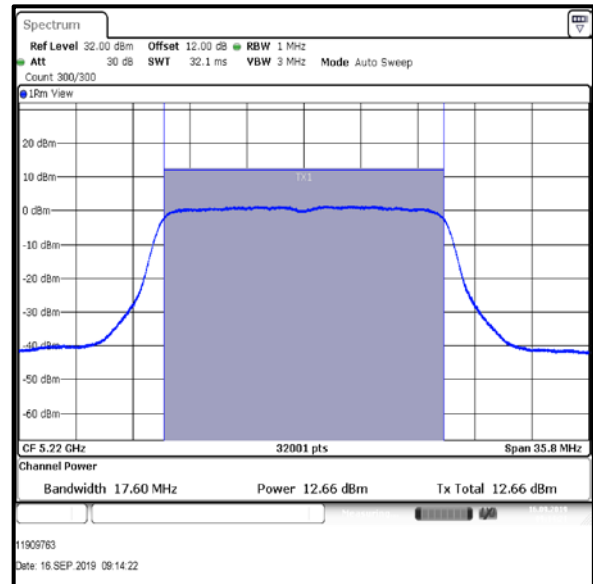
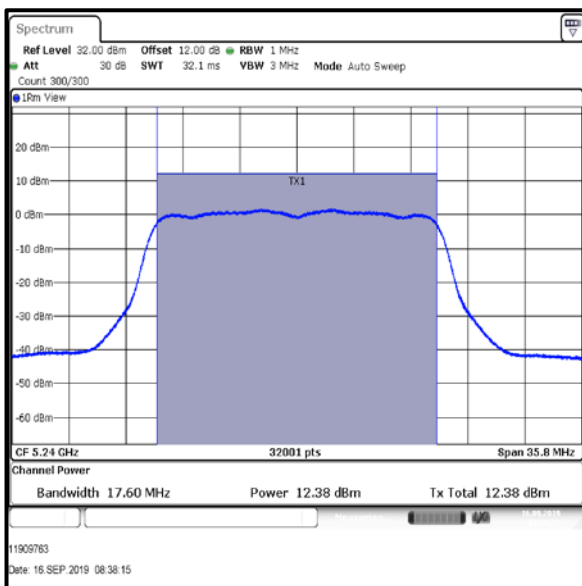
Channel	Corrected Conducted Power Port 1 (dBm)	Corrected Conducted Power Port 2 (dBm)	Port 1+2 Combined Conducted Power (dBm)	Conducted Power Limit (dBm)	Margin (dB)	Result
Bottom +1	13.3	13.2	16.3	22.0	5.7	Complied
Middle	13.3	13.2	16.3	22.0	5.7	Complied
Top	13.1	13.0	16.1	22.0	5.9	Complied

De Facto EIRP Limit Comparison

Channel	Port 1+2 Combined Conducted Power (dBm)	Directional Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom +1	16.3	8.0	24.3	30.0	5.7	Complied
Middle	16.3	8.0	24.3	30.0	5.7	Complied
Top	16.1	8.0	24.1	30.0	5.9	Complied

Result: Pass

Transmitter Maximum Conducted Output Power (continued)**Results: 802.11n / 20 MHz / MCS0 / MIMO / Port 1 / PWL 17 / 8 dBi Antenna Group****Bottom +1 Channel****Middle Channel****Top Channel**

Transmitter Maximum Conducted Output Power (continued)**Results: 802.11n / 20 MHz / MCS0 / MIMO / Port 2 / PWL 17 / 8 dBi Antenna Group****Bottom +1 Channel****Middle Channel****Top Channel**

Transmitter Maximum Conducted Output Power (continued)**Results: 802.11n / 20 MHz / MCS0 / MIMO / Port 1+2 / PWR 16 / 8 dBi Antenna Group**

Channel	Port 1			Port 2		
	Conducted Power (dBm)	Duty Cycle Correction (dB)	Corrected Conducted Power (dBm)	Conducted Power (dBm)	Duty Cycle Correction (dB)	Corrected Conducted Power (dBm)
Bottom	11.8	0.5	12.3	11.8	0.5	12.3

Channel	Corrected Conducted Power Port 1 (dBm)	Corrected Conducted Power Port 2 (dBm)	Port 1+2 Combined Conducted Power (dBm)	Conducted Power Limit (dBm)	Margin (dB)	Result
Bottom	12.3	12.3	15.3	22.0	6.7	Complied

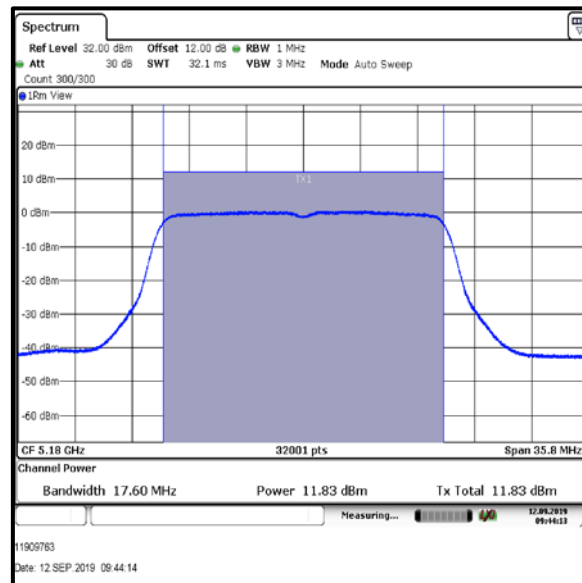
De Facto EIRP Limit Comparison

Channel	Port 1+2 Combined Conducted Power (dBm)	Directional Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom	15.3	8.0	23.3	30.0	6.7	Complied

Result: Pass

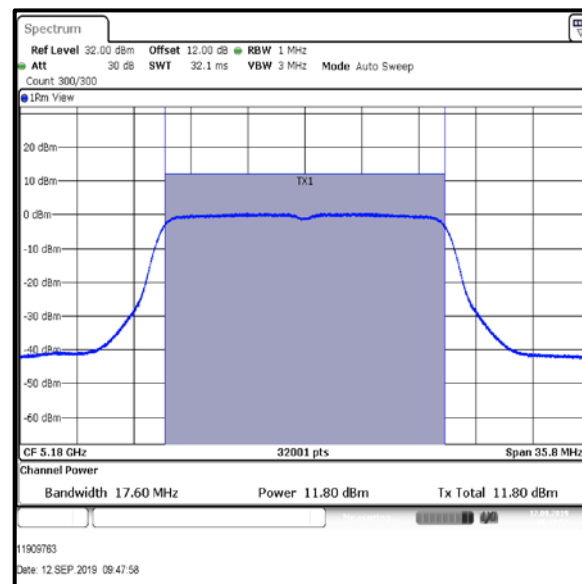
Transmitter Maximum Conducted Output Power (continued)

Results: 802.11n / 20 MHz / MCS0 / MIMO / Port 1 / PWL 16 / 8 dBi Antenna Group



Bottom Channel

Results: 802.11n / 20 MHz / MCS0 / MIMO / Port 2 / PWL 16 / 8 dBi Antenna Group



Bottom Channel

Transmitter Maximum Conducted Output Power (continued)**Results: 802.11ac / 20 MHz / MCS0 / MIMO / Port 1+2 / PWL 17 / 8 dBi Antenna Group**

Channel	Port 1			Port 2		
	Conducted Power (dBm)	Duty Cycle Correction (dB)	Corrected Conducted Power (dBm)	Conducted Power (dBm)	Duty Cycle Correction (dB)	Corrected Conducted Power (dBm)
Bottom +1	12.5	0.4	12.9	12.5	0.4	12.9
Middle	12.5	0.4	12.9	12.4	0.4	12.8
Top	12.5	0.4	12.9	12.4	0.4	12.8

Channel	Corrected Conducted Power Port 1 (dBm)	Corrected Conducted Power Port 2 (dBm)	Port 1+2 Combined Conducted Power (dBm)	Conducted Power Limit (dBm)	Margin (dB)	Result
Bottom +1	12.9	12.9	15.9	22.0	6.1	Complied
Middle	12.9	12.8	15.9	22.0	6.1	Complied
Top	12.9	12.8	15.9	22.0	6.1	Complied

De Facto EIRP Limit Comparison

Channel	Port 1+2 Combined Conducted Power (dBm)	Directional Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom +1	15.9	8.0	23.9	30.0	6.1	Complied
Middle	15.9	8.0	23.9	30.0	6.1	Complied
Top	15.9	8.0	23.9	30.0	6.1	Complied

Result: Pass