

FCC Part 15 EMI TEST REPORT of

E.U.T. : 22Mbps Wireless LAN PC
Card

FCC ID. : M4Y-03500

MODEL : XI-350

for

APPLICANT : Z-COM, INC.

ADDRESS : 7F-2, NO. 9, PROSEPERITY 1ST RD.,
SCIENCE-BASED INDUSTRIAL PARK,
HSINCHU, TAIWAN, R.O.C.

Test Performed by

ELECTRONICS TESTING CENTER, TAIWAN
NO. 34, LIN 5, DING FU TSUN, LINKOU HSIANG
TAIPEI HSIEN, TAIWAN, R.O.C.

Tel:(02)26023052, 26023054

Fax:(02)26010910

Report Number : ET91R-04-093-03

TEST REPORT CERTIFICATION

Applicant : Z-COM, INC.
7F-2, NO. 9, PROSEPERITY 1ST RD., SCIENCE-BASED
INDUSTRIAL PARK, HSINCHU, TAIWAN, R.O.C.

Manufacturer : Z-COM, INC.
7F-2, NO. 9, PROSEPERITY 1ST RD., SCIENCE-BASED
INDUSTRIAL PARK, HSINCHU, TAIWAN, R.O.C.

Description of EUT :

- a) Type of EUT : 22Mbps Wireless LAN PC Card
- b) Trade Name : Z-COM
- c) Model No. : XI-350
- d) Power Supply : From Notebook PC

Regulation Applied : FCC Rules and Regulations Part 15 Subpart B & C (2001)

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.4, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relate only to the item tested.

2. The testing report shall not be reproduced expect in full, without the written approval of ETC.

Issued Date : May 24, 2002

Test Engineer : Jeff Chuang
(Jeff Chuang)

Approve & Authorized Signer : Will Yauo
Will Yauo, Manager
EMC Dept. II of ELECTRONICS
TESTING CENTER, TAIWAN

Table of Contents	Page
1 GENERAL INFORMATION.....	1
1.1 Product Description.....	1
1.2 Characteristics of Device	1
1.3 Test Methodology.....	1
1.4 Test Facility	1
2 PROVISIONS APPLICABLE.....	2
2.1 Definition.....	2
2.2 Requirement for Compliance	3
2.3 Restricted Bands of Operation	5
2.4 Labeling Requirement	5
2.5 User Information.....	6
3. SYSTEM TEST CONFIGURATION.....	7
3.1 Justification.....	7
3.2 Devices for Tested System	7
4 RADIATED EMISSION MEASUREMENT.....	8
4.1 Applicable Standard	8
4.2 Measurement Procedure.....	8
4.3 Measuring Instrument.....	10
4.4 Radiated Emission Data	11
4.4.1 RF Portion.....	11
4.4.2 Other Emission.....	14
4.5 Field Strength Calculation	14
4.6 Photos of Radiation Measuring Setup	15
5 CONDUCTED EMISSION MEASUREMENT.....	16
5.1 Standard Applicable	16
5.2 Measurement Procedure.....	16
5.3 Conducted Emission Data	17
5.4 Result Data Calculation.....	18
5.5 Conducted Measurement Equipment.....	19
5.6 Photos of Conduction Measuring Setup	20
6 ANTENNA REQUIREMENT	21
6.1 Standard Applicable	21
6.2 Antenna Construction and Directional Gain	21
7 EMISSION BANDWIDTH MEASUREMENT.....	22

7.1 Standard Applicable	22
7.2 Measurement Procedure.....	22
7.3 Measurement Equipment.....	22
7.4 Measurement Data	23
8 OUTPUT POWER MEASUREMENT.....	24
8.1 Standard Applicable	24
8.2 Measurement Procedure.....	24
8.3 Measurement Equipment.....	24
8.4 Measurement Data	25
9 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT.....	26
9.1 Standard Applicable	26
9.2 Measurement Procedure.....	26
9.3 Measurement Equipment.....	26
9.4 Measurement Data	27
10 POWER DENSITY MEASUREMENT.....	28
10.1 Standard Applicable	28
10.2 Measurement Procedure.....	28
10.3 Measurement Equipment.....	28
10.4 Measurement Data	29
APPENDIX 1 : PLOTED DATAS OF POWER LINE CONDUCTED EMISSIONS.....	30
APPENDIX 2 : PLOTED DATAS OF EMISSIONS BANDWIDTH.....	31
APPENDIX 3 : PLOTED DATAS OF OUTPUT PEAK POWER.....	32
APPENDIX 4 : PLOTED DATAS OF BAND EDGE EMISSION.....	33
APPENDIX 5 : PLOTED DATAS OF POWER DENSITY.....	34

1 GENERAL INFORMATION

1.1 Product Description

- a) Type of EUT : 22Mbps Wireless LAN PC Card
- b) Trade Name : Z-COM
- c) Model No. : XI-350
- d) Power Supply : From Notebook PC

1.2 Characteristics of Device

The 22Mbps Wireless LAN PC Card designed with a transmitting method of direct sequence spread spectrum is for local area network operation, which operates at 2.4 GHz ISM band and data rate up to 22 Mbps. The spread spectrum unit is HFA3861 and the rated output power is 17 dBm (50.12 mW).

1.3 Test Methodology

For Wireless LAN PCMMCIA Card, both conducted and radiated emissions were performed according to the procedures illustrated in ANSI C63.4 (1992) and for processing gain measurement is according to FCC Public Notice. Other required measurements were illustrated in separate sections of this test report for details.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the roof top of Building at No. 34, Lin 5, Ding Fu Tsun, Linkou Hsiang, Taipei Hsien, Taiwan 244, R.O.C.

This site has been fully described in a report submitted to your office, and accepted in a letter dated Feb. 10, 2000.

2 PROVISIONS APPLICABLE

2.1 Definition

Unintentional radiator:

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

Class B Digital Device :

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business of industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction.

2.2 Requirement for Compliance

(1) Conducted Emission Requirement

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following:

Frequency MHz	Emissions μ V	Emissions dB μ V
0.45 - 30.0	250	48.0

For intentional device, according to § 15.207(a) Line Conducted Emission Limits is same as above table.

(2) Radiated Emission Requirement

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated dB μ V/m	Radiated μ V/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

(3) Antenna Requirement

For intentional device, according to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

(4) Bandwidth Requirement

For direct sequence system, according to 15.247(a)(2), the minimum 6dB bandwidth shall be at least 500 kHz.

(5) Output Power Requirement

For direct sequence system, according to 15.247(b), the maximum peak output power of the transmitter shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(6) 100 kHz Bandwidth of Frequency Band Edges Requirement

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in § 15.209(a), whichever results in the lesser attenuation.

(7) Power Density Requirement

According to 15.247(d), for direct sequence systems, the transmitted power density averaged over any 1 second interval shall not be greater than 8 dBm in any 3 kHz bandwidth within these bands.

(8) Processing Gain Requirement

According to 15.247(e), the processing gain of a direct sequence system shall be at least 10 dB. The processing gain shall be determined from the ratio in dB of the signal to noise ratio with the system spreading code turned off to the signal to noise ratio with the system spreading code turned on, as measured at the demodulated output of the receiver.

2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.25
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3360-4400	Above 38.6
13.36-13.41			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions : (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

3. SYSTEM TEST CONFIGURATION

3.1 Justification

For both radiated and conducted emissions below 1 GHz, the system was configured for testing in a typical fashion as a customer would normally use it. The peripherals other than EUT were connected in normally standing by situation. Measurement was performed under the condition that a computer program was exercised to simulate data communication of EUT, and the transmission rate was set to maximum allowed by EUT. Three highest emissions were verified with varying placement of the transmitting antenna connected to EUT to maximize the emission from EUT.

For conducted emissions, only measured on TX and RX operation, for the digital circuits portion also function normally whenever TX or RX is operated. For radiated emissions, whichever RF channel is operated, the digital circuits function identically. As the reason, measurement of radiated emissions from digital circuits is only performed with channel 7 by transmitting mode.

During the preliminary test, the worse case is the antenna with a cable, and data presented in this test report just shows the worse case.

3.2 Devices for Tested System

Device	Manufacture	Model	Cable Description
22Mbps Wireless LAN PC Card *	Z-COM, INC.	XI-350	----
Printer	Hewlett-Packard	2225C+	1.2m Shielded Cable
Notebook PC	Tatung Co.	TN-5900	2.5m Unshielded AC Adaptor Power Cord
Modem	Smar TEAM Co.	1200AT	2.0m Shielded Cable

Remark “*” means equipment under test.

4 RADIATED EMISSION MEASUREMENT

4.1 Applicable Standard

For unintentional radiator, the radiated emission shall comply with § 15.109(a).

For intentional radiators, according to § 15.247 (a), operation under this provision is limited to frequency hopping and direct sequence spread spectrum, and the out band emission shall be comply with § 15.247 (c)

4.2 Measurement Procedure

1. Setup the configuration per figure 5 and 6 for frequencies measured below and above 1 GHz respectively.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.

Note : A band pass filter was used to avoid pre-amplifier saturated when measure TX operation mode in frequency band above 1 GHz.

5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission with varying the placement of cables associated with EUT to obtain the worse case and record the result.

Figure 1 : Frequencies measured below 1 GHz configuration


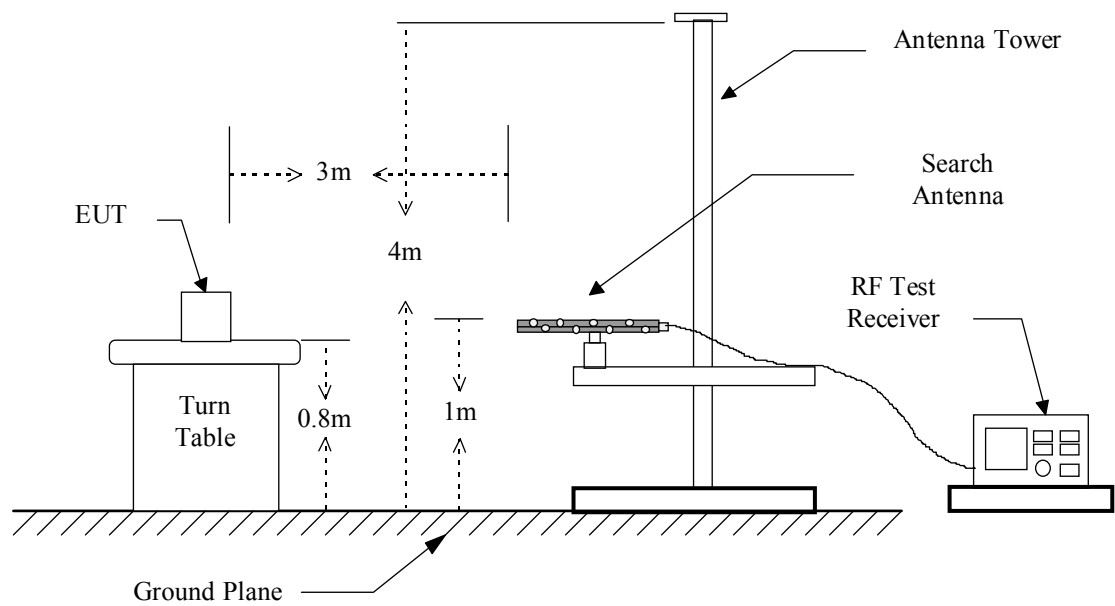


Figure 2 : Frequencies measured above 1 GHz configuration

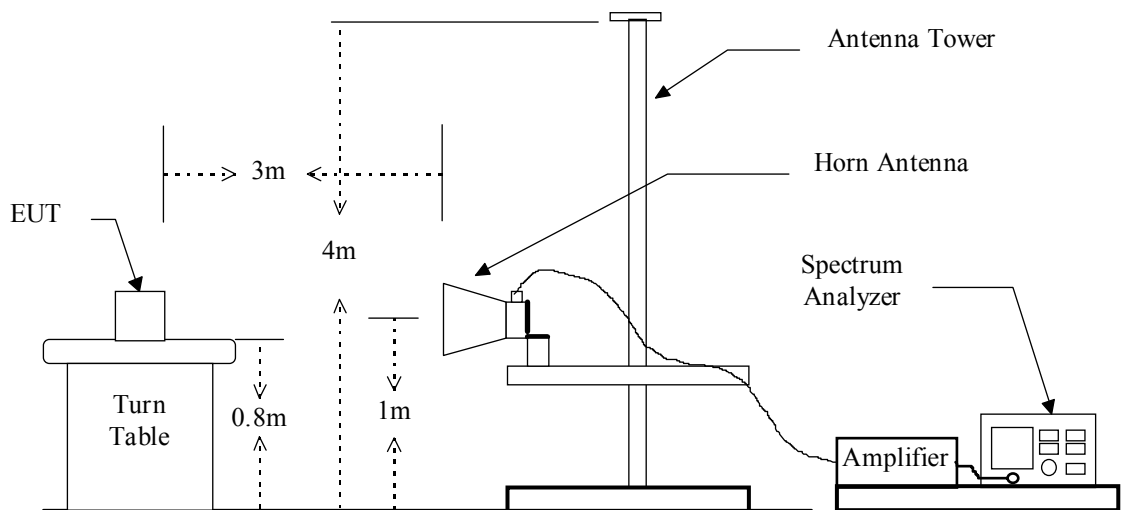

4.3 Measuring Instrument

The following instrument are used for radiated emissions measurement:

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Hewlett-Packard	8568B	01/10/2003
Pre-selector	Hewlett-Packard	85685A	01/10/2003
Quasi Peak Detector	Hewlett-Packard	85650A	01/10/2003
Spectrum Analyzer	Adventest	R3271	09/09/2002
RF Test Receiver	Rohde & Schwarz	ESVS 30	08/05/2002
Horn Antenna	EMCO	3115	05/09/2002
Log periodic Antenna	EMCO	3146	11/04/2002
Biconical Antenna	EMCO	3110B	11/04/2002
Preamplifier	Hewlett-Packard	8449B	05/10/2002
Preamplifier	Hewlett-Packard	8447D	10/14/2002
Spectrum Analyzer	Hewlett-Packard	8564E	04/16/2003

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	N/A
	Spectrum Analyzer	Peak	100 kHz	100 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	300 Hz

4.4 Radiated Emission Data

4.4.1 RF Portion

a) Channel 1

Operation Mode : Receiving /Transmitting

Fundamental Frequency : 2412 MHz (Local Frequency : 2038 MHz)

Test Date : May 22, 2002

Temperature : 25 °C

Humidity : 50 %

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H Peak	V Ave	H Peak	V Ave		Peak	Ave	Peak	Ave.			
* 2038.040	52.2	49.0	54.2	51.6	-4.5	49.7	47.1	74.0	54.0	-6.9	108	1.30
* 4076.040	46.5	43.1	50.7	47.9	2.0	52.7	49.9	74.0	54.0	-4.1	92	1.40
* 6114.120	---	---	---	---	4.5	---	---	74.0	54.0	---	---	---
* 8152.160	---	---	---	---	6.5	---	---	74.0	54.0	---	---	---
* 10190.200	---	---	---	---	7.6	---	---	74.0	54.0	---	---	---
4824.000	---	---	---	---	2.6	---	---	74.0	54.0	---	---	---
7236.000	---	---	---	---	5.8	---	---	74.0	54.0	---	---	---
9648.000	---	---	---	---	7.3	---	---	74.0	54.0	---	---	---
12060.000	---	---	---	---	9.2	---	---	74.0	54.0	---	---	---
14472.000	---	---	---	---	11.6	---	---	74.0	54.0	---	---	---
16884.000	---	---	---	---	12.1	---	---	74.0	54.0	---	---	---
19296.000	---	---	---	---	8.8	---	---	74.0	54.0	---	---	---
21708.000	---	---	---	---	9.8	---	---	74.0	54.0	---	---	---
24120.000	---	---	---	---	10.4	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark “***” means that Peak result is meet average limit.
3. Remark “---” means that the emissions level is too low to be measured.
4. Item “Margin” referred to Average limit while there is only peak result.
5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

b) Channel 7

Operation Mode : Receiving / Transmitting

Fundamental Frequency : 2442 MHz (Local Frequency : 2068 MHz)

Test Date : May 22, 2002Temperature : 25 °CHumidity : 50 %

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H Peak	V Ave	H Peak	V Ave		Peak	Ave	Peak	Ave.			
* 2068.000	53.9	49.7	54.8	52.9	-4.3	50.5	48.6	74.0	54.0	-5.4	90	1.50
* 4136.000	48.3	43.5	51.5	48.9	2.0	53.5	50.9	74.0	54.0	-3.1	85	1.80
* 6204.000	---	---	---	---	4.5	---	---	74.0	54.0	---	---	---
* 8272.000	---	---	---	---	6.6	---	---	74.0	54.0	---	---	---
* 10340.000	---	---	---	---	7.7	---	---	74.0	54.0	---	---	---
4884.000	---	---	---	---	2.7	---	---	74.0	54.0	---	---	---
7326.000	---	---	---	---	5.9	---	---	74.0	54.0	---	---	---
9768.000	---	---	---	---	7.3	---	---	74.0	54.0	---	---	---
12210.000	---	---	---	---	9.3	---	---	74.0	54.0	---	---	---
14652.000	---	---	---	---	11.6	---	---	74.0	54.0	---	---	---
17094.000	---	---	---	---	13.4	---	---	74.0	54.0	---	---	---
19536.000	---	---	---	---	8.5	---	---	74.0	54.0	---	---	---
21978.000	---	---	---	---	9.9	---	---	74.0	54.0	---	---	---
24420.000	---	---	---	---	10.7	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark “***” means that Peak result is meet average limit.
3. Remark “---” means that the emissions level is too low to be measured.
4. Item “Margin” referred to Average limit while there is only peak result.
5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

c) Channel 11

Operation Mode : Receiving / Transmitting

Fundamental Frequency : 2462 MHz (Local Frequency : 2088 MHz)

Test Date : May 22, 2002Temperature : 25 °CHumidity : 50 %

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H Peak	Ave	V Peak	Ave		Peak	Ave	Peak	Ave.			
* 2088.000	54.7	50.0	55.8	53.6	-4.3	51.5	49.3	74.0	54.0	-4.7	70	2.10
* 4176.000	49.7	45.5	51.4	48.6	2.0	53.4	50.6	74.0	54.0	-3.4	90	1.00
* 6264.000	---	---	---	---	4.5	---	---	74.0	54.0	---	---	---
* 8352.000	---	---	---	---	6.7	---	---	74.0	54.0	---	---	---
* 10440.000	---	---	---	---	7.8	---	---	74.0	54.0	---	---	---
4924.000	---	---	---	---	2.8	---	---	74.0	54.0	---	---	---
7386.000	---	---	---	---	6.0	---	---	74.0	54.0	---	---	---
9848.000	---	---	---	---	7.3	---	---	74.0	54.0	---	---	---
12310.000	---	---	---	---	9.3	---	---	74.0	54.0	---	---	---
14772.000	---	---	---	---	11.5	---	---	74.0	54.0	---	---	---
17234.000	---	---	---	---	14.3	---	---	74.0	54.0	---	---	---
19696.000	---	---	---	---	8.5	---	---	74.0	54.0	---	---	---
22158.000	---	---	---	---	10.0	---	---	74.0	54.0	---	---	---
24620.000	---	---	---	---	10.9	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark “***” means that Peak result is meet average limit.
3. Remark “---” means that the emissions level is too low to be measured.
4. Item “Margin” referred to Average limit while there is only peak result.
5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

4.4.2 Other Emission

a) Emission frequencies below 1 GHz

Test Date : May 22, 2002Temperature : 25 °CHumidity : 50 %

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (m)
174.180	H	48.0	-9.0	39.0	43.5	-4.5	90	2.80
200.900	H	47.4	-7.0	40.4	43.5	-3.1	215	3.00
280.210	H	45.3	-2.7	42.6	46.0	-3.4	290	1.80
320.214	H	50.8	-6.8	44.0	46.0	-2.0	270	2.50
336.464	H	51.8	-8.4	43.4	46.0	-2.6	310	2.70
374.200	V	48.4	-6.0	42.4	46.0	-3.6	275	1.40

Note :

1. Remark “---” means that the emissions level is too low to be measured.
2. The expanded uncertainty of the radiated emission tests is 3.53 dB.

b) Emission frequencies above 1 GHz

Radiated emission frequencies above 1 GHz to 5 GHz were too low to be measured with a pre-amplifier of 35 dB.

4.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss(if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

where

Corrected Factor = Antenna FACTOR + Cable Loss + High Pass Filter Loss - Amplifier Gain

4.6 Photos of Radiation Measuring Setup

Please see Setup Photos in Exhibit F.

5 CONDUCTED EMISSION MEASUREMENT


5.1 Standard Applicable

For unintentional and intentional device, Line Conducted Emission Limits are in accordance to § 15.107(a) and § 15.207(a) respectively. Both Limits are identical specification.

5.2 Measurement Procedure

1. Setup the configuration per figure 3.
2. A preliminary scan with a spectrum monitor is performed to identify the frequency of emission that has the highest amplitude relative to the limit by operating the EUT in selected modes of operation, typical cable positions, and with a typical system configuration.
3. Record the 6 or 8 highest emissions relative to the limit.
4. Measure each frequency obtained from step 3 by a test receiver set on quasi peak detector function, and then record the accuracy frequency and emission level. If all emissions measured in the specified band are attenuated more than 20 dB from the limit, this step would be ignored, and the peak detector function would be used.
5. Confirm the highest three emissions with variation of the EUT cable configuration and record the final data.
6. Repeat all above procedures on measuring each operation mode of EUT.

Figure 3 : Conducted emissions measurement configuration

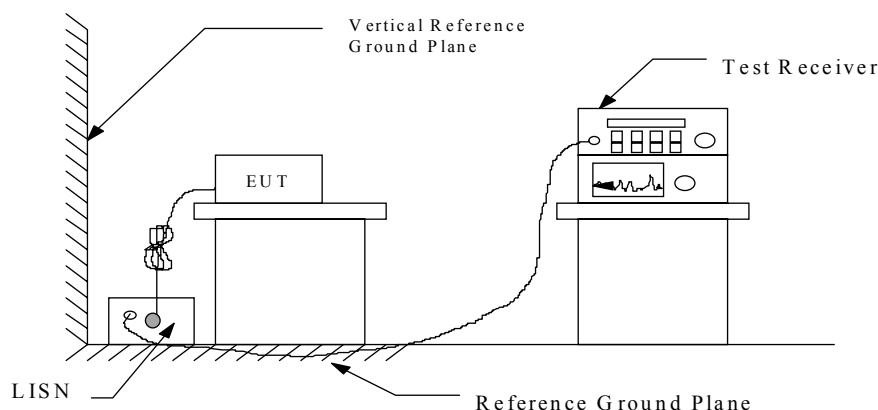

5.3 Conducted Emission Data

a) Channel 1

Operation Mode : Transmitting / Receiving

Test Date : May 22, 2002

Temperature : 23 °C

Humidity: 50 %

Frequency (MHz)	Reading (dBuV)		Factor (dB)	Result (dBuV)		Limit (dBuV)	Margin (dB)
	N	L1		N	L1		
0.4725	28.7	33.7	0.2	28.9	33.9	48.0	-14.1
0.5387	28.5	32.4	0.2	28.7	32.6	48.0	-15.4
0.6951	25.8	33.7	0.2	26.0	33.9	48.0	-14.1
2.3125	24.5	28.9	0.3	24.8	29.2	48.0	-18.8
3.5418	31.2	29.2	0.3	31.5	29.5	48.0	-16.5
21.5407	22.3	29.7	0.9	23.2	30.6	48.0	-17.4

b) Channel 7

Operation Mode : Transmitting / Receiving

Test Date : May 22, 2002

Temperature : 23 °C

Humidity: 50 %

Frequency (MHz)	Reading (dBuV)		Factor (dB)	Result (dBuV)		Limit (dBuV)	Margin (dB)
	N	L1		N	L1		
0.4731	28.9	32.8	0.2	29.1	33.0	48.0	-15.0
0.5529	31.1	32.5	0.2	31.3	32.7	48.0	-15.3
0.7218	28.5	27.6	0.3	28.8	27.9	48.0	-19.2
2.3150	27.6	25.8	0.3	27.9	26.1	48.0	-20.1
3.5421	27.8	28.1	0.3	28.1	28.4	48.0	-19.6
21.5412	31.8	28.4	0.9	32.7	29.3	48.0	-15.3

c) Channel 11

Operation Mode : Transmitting / Receiving

Test Date : May 22, 2002Temperature : 23 °CHumidity: 50 %

Frequency (MHz)	Reading (dBuV)		Factor (dB)	Result (dBuV)		Limit (dBuV)	Margin (dB)
	N	L1		N	L1		
0.4731	29.0	30.0	0.2	29.2	30.2	48.0	-17.8
0.5714	29.2	25.8	0.2	29.4	26.0	48.0	-18.6
0.8051	27.4	20.9	0.3	27.7	21.2	48.0	-20.3
3.1480	28.9	25.7	0.3	29.2	26.0	48.0	-18.8
20.0540	25.7	26.1	0.9	26.6	27.0	48.0	-21.0
21.5480	27.8	27.4	0.9	28.7	28.3	48.0	-19.3

Note : 1. Please see appendix 1 for Plotted Data

2. The expanded uncertainty of the conducted emission tests is 2.45 dB.

5.4 Result Data Calculation

The result data is calculated by adding the LISN Factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\text{RESULT} = \text{READING} + \text{LISN FACTOR}$$

Assume a receiver reading of 22.5 dB μ V is obtained, and LISN Factor is 0.1 dB, then the total of disturbance voltage is 22.6 dB μ V.

$$\text{RESULT} = 22.5 + 0.1 = 22.6 \text{ dB } \mu \text{ V}$$

$$\begin{aligned} \text{Level in } \mu \text{ V} &= \text{Common Antilogarithm}[(22.6 \text{ dB } \mu \text{ V})/20] \\ &= 13.48 \mu \text{ V} \end{aligned}$$

5.5 Conducted Measurement Equipment

The following test equipment are used during the conducted test .

Equipment	Manufacturer	Model No.	Next Cal. Due
RF Test Receiver	Rohde and Schwarz	ESH3	01/03/2003
Spectrum Monitor	Rohde and Schwarz	EZM	N.C.R.
Line Impedance Stabilization network	Kyoritsu	KNW-407	10/14/2002
Line Impedance Stabilization network	Rohde and Schwarz	ESH2-Z5	08/05/2002
Plotter	Hewlett-Packard	7440A	N/A
Shielded Room	Riken		N.C.R.

5.6 Photos of Conduction Measuring Setup

Please see Setup Photos in Exhibit F.

6 ANTENNA REQUIREMENT

6.1 Standard Applicable

For intentional device, according to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to § 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.2 Antenna Construction and Directional Gain

The antenna terminal of this unit is designed with a reversed MMCX Connector. Please see construction Photos Of Exhibit B for details.

7 EMISSION BANDWIDTH MEASUREMENT


7.1 Standard Applicable

According to 15.247(a)(2), for direct sequence system, the minimum 6dB bandwidth shall be at least 500 kHz.

7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 5 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Figure 4: Emission bandwidth measurement configuration.

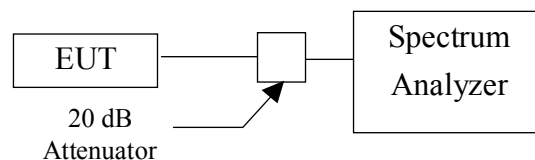

7.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
RF Test Receiver	Rohde & Schwarz	ESBI	05/15/2003
Plotter	Hewlett-Packard	7440A	N/A
Attenuator	Weinschel Engineering	AS3667	N/A

7.4 Measurement Data

Test Date : May 23, 2002 Temperature : 25 °C Humidity: 60 %

- a) Channel 01 : 6 dB Emission Bandwidth is 12.00 MHz
- b) Channel 07 : 6 dB Emission Bandwidth is 12.13 MHz
- c) Channel 11 : 6 dB Emission Bandwidth is 12.33 MHz

Note : 1. Please see appendix 2 for Plotted Data

2. The expanded uncertainty of the emission bandwidth tests is 1500Hz.

8 OUTPUT POWER MEASUREMENT


8.1 Standard Applicable

For direct sequence system, according to 15.247(b), the maximum peak output power of the transmitter shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 5 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 3 MHz and VBW to 3 MHz.
4. Measure the highest amplitude appearing on spectral display and record the level to calculate result data.
5. Repeat above procedures until all frequencies measured were complete.

Figure 5: Output power and measurement configuration.



8.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
RF Test Receiver	Rohde & Schwarz	ESBI	05/15/2002
Plotter	Hewlett-Packard	7440A	N/A

8.4 Measurement Data

Test Date : May 23, 2002 Temperature : 25 °C Humidity: 60 %

- a) Channel 01 : Output Peak Power is 16.90 dBm or **48.98** mW
- b) Channel 07 : Output Peak Power is 16.40 dBm or **43.65** mW
- c) Channel 11 : Output Peak Power is 15.80 dBm or **38.02** mW

Note : 1. Please see appendix 3 for Plotted Data

2. The expanded uncertainty of the output power tests is 2dB.

9 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT

9.1 Standard Applicable

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in § 15.209(a), whichever results in the lesser attenuation.

9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 5 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

9.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
RF Test Receiver	Rohde & Schwarz	ESBI	05/15/2002
Attenuator	Weinschel Engineering	1	N/A
Plotter	Hewlett-Packard	7440A	N/A

9.4 Measurement Data

Test Date : May 23, 2002 Temperature : 25 °C Humidity: 60 %

- a) Lower Band Edge : maximum value is -42.00 dBm that is attenuated more than 20 dB
- b) Upper Band Edge : maximum value is -48.67 dBm that is attenuated more than 20 dB

Note : 1. Please see appendix 4 for Plotted Data

2. The expanded uncertainty of the 100 kHz bandwidth of band edges tests is 2dB.

10 POWER DENSITY MEASUREMENT

10.1 Standard Applicable

According to 15.247(d), for direct sequence systems, the transmitted power density averaged over any 1 second interval shall not be greater than 8 dBm in any 3 kHz bandwidth within these bands.

10.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set EUT to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of spectrum analyzer on highest level appearing on spectral display within a 300 kHz frequency span.
4. Set the spectrum analyzer on a 3 kHz resolution bandwidth and 300 kHz video bandwidth as well as max. hold function. Also turn on SA level corrected function by 21 dB and then record the measurement result.
5. Repeat above procedures until all measured frequencies were complete.

10.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
RF Test Receiver	Rohde & Schwarz	ESBI	05/15/2002
Attenuator	Weinschel Engineering	1	N/A
Plotter	Hewlett-Packard	7440A	N/A

10.4 Measurement Data

Test Date : May 23, 2002 Temperature : 25 °C Humidity: 60 %


- a) Channel 01 : Maximun Power Density of 3 kHz Bandwidth is -16.83dBm
- b) Channel 07 : Maximun Power Density of 3 kHz Bandwidth is -15.83 dBm
- c) Channel 11 : Maximun Power Density of 3 kHz Bandwidth is -19.33dBm

Note : 1. Please see appendix 5 for Plotted Data

2. The expanded uncertainty of the power density tests is 2dB.

Appendix 1 : Ploted Datas of Power Line Conducted Emissions

dBuV

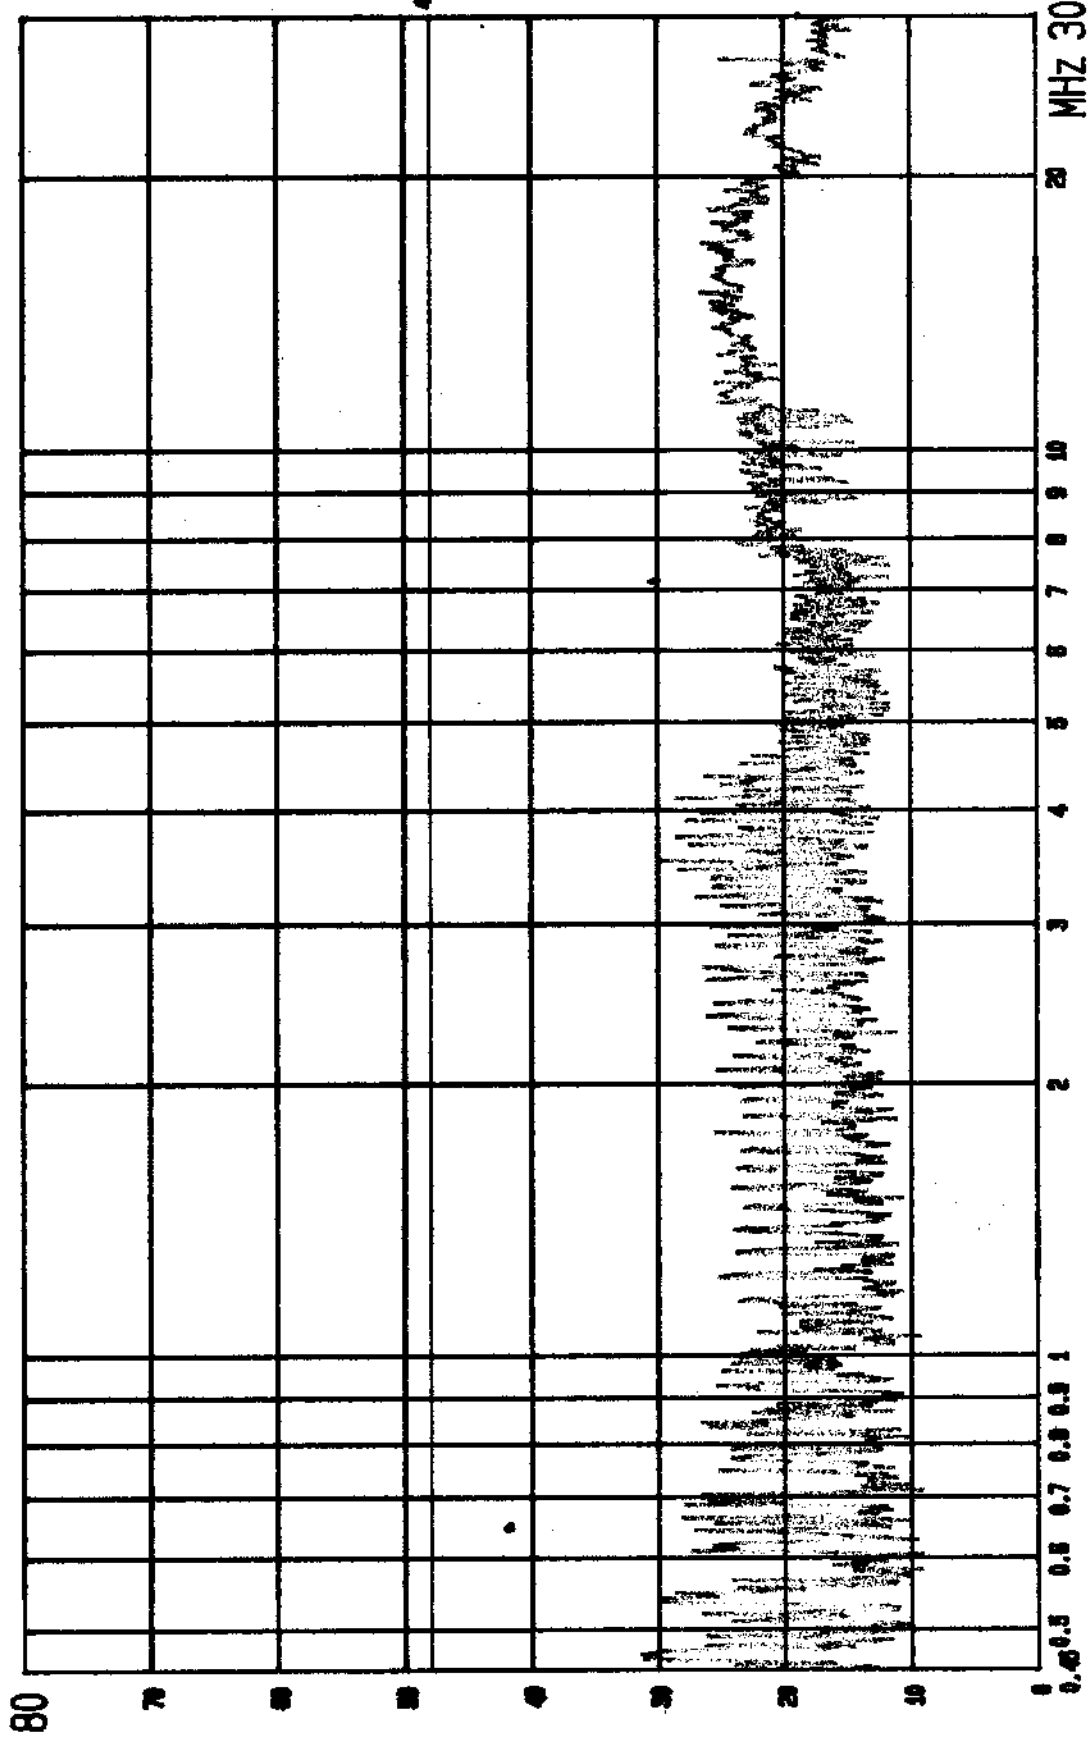


LISN: N 4: QP., CLASS B LIMIT
MODE: CH LOW ETC EMI LAB.

EUT: Wireless LAN CARD
POWER: 120V/60HZ

FCC CONDUCTED TEST
MODEL: XI-350

dBuV

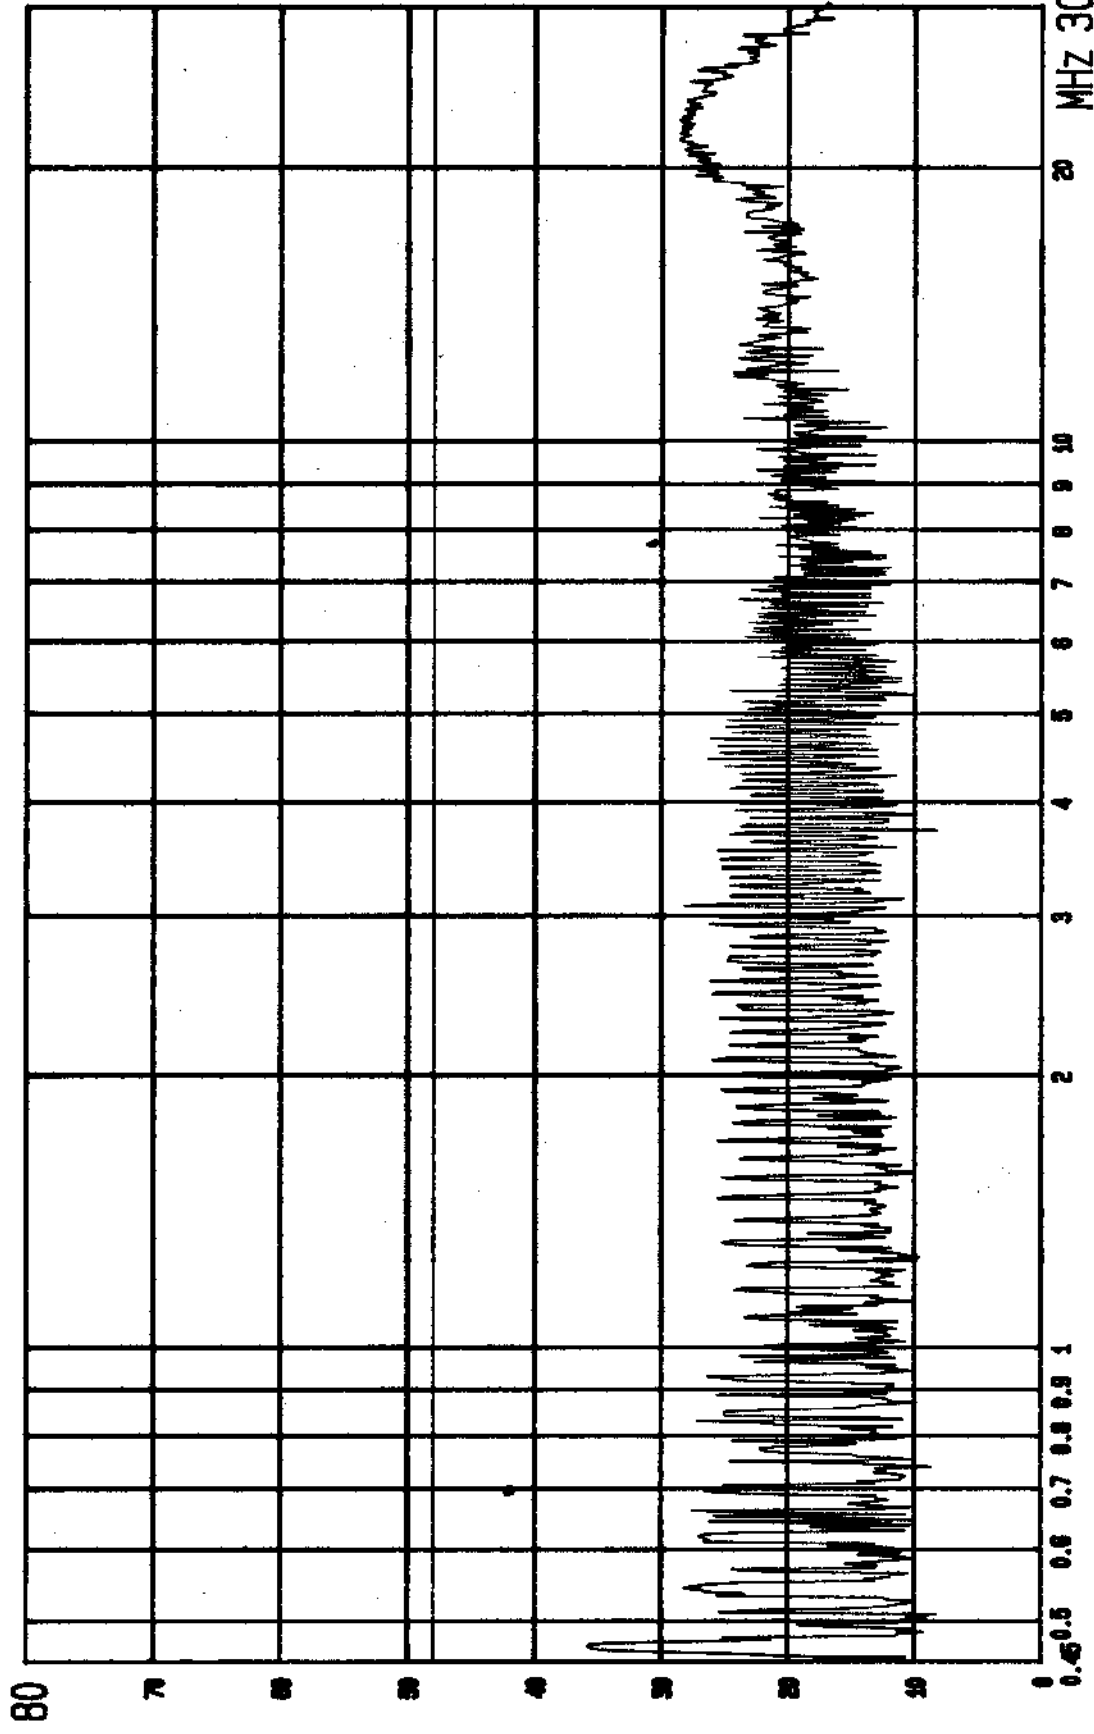


LISN: L1 4:QP.. CLASS B LIMIT
MODE: CH LOW ETC EMI LAB.

EUT: Wireless LAN CARD
POWER: 120V/60HZ

FCC CONDUCTED TEST
MODEL: XI-350


dBuV

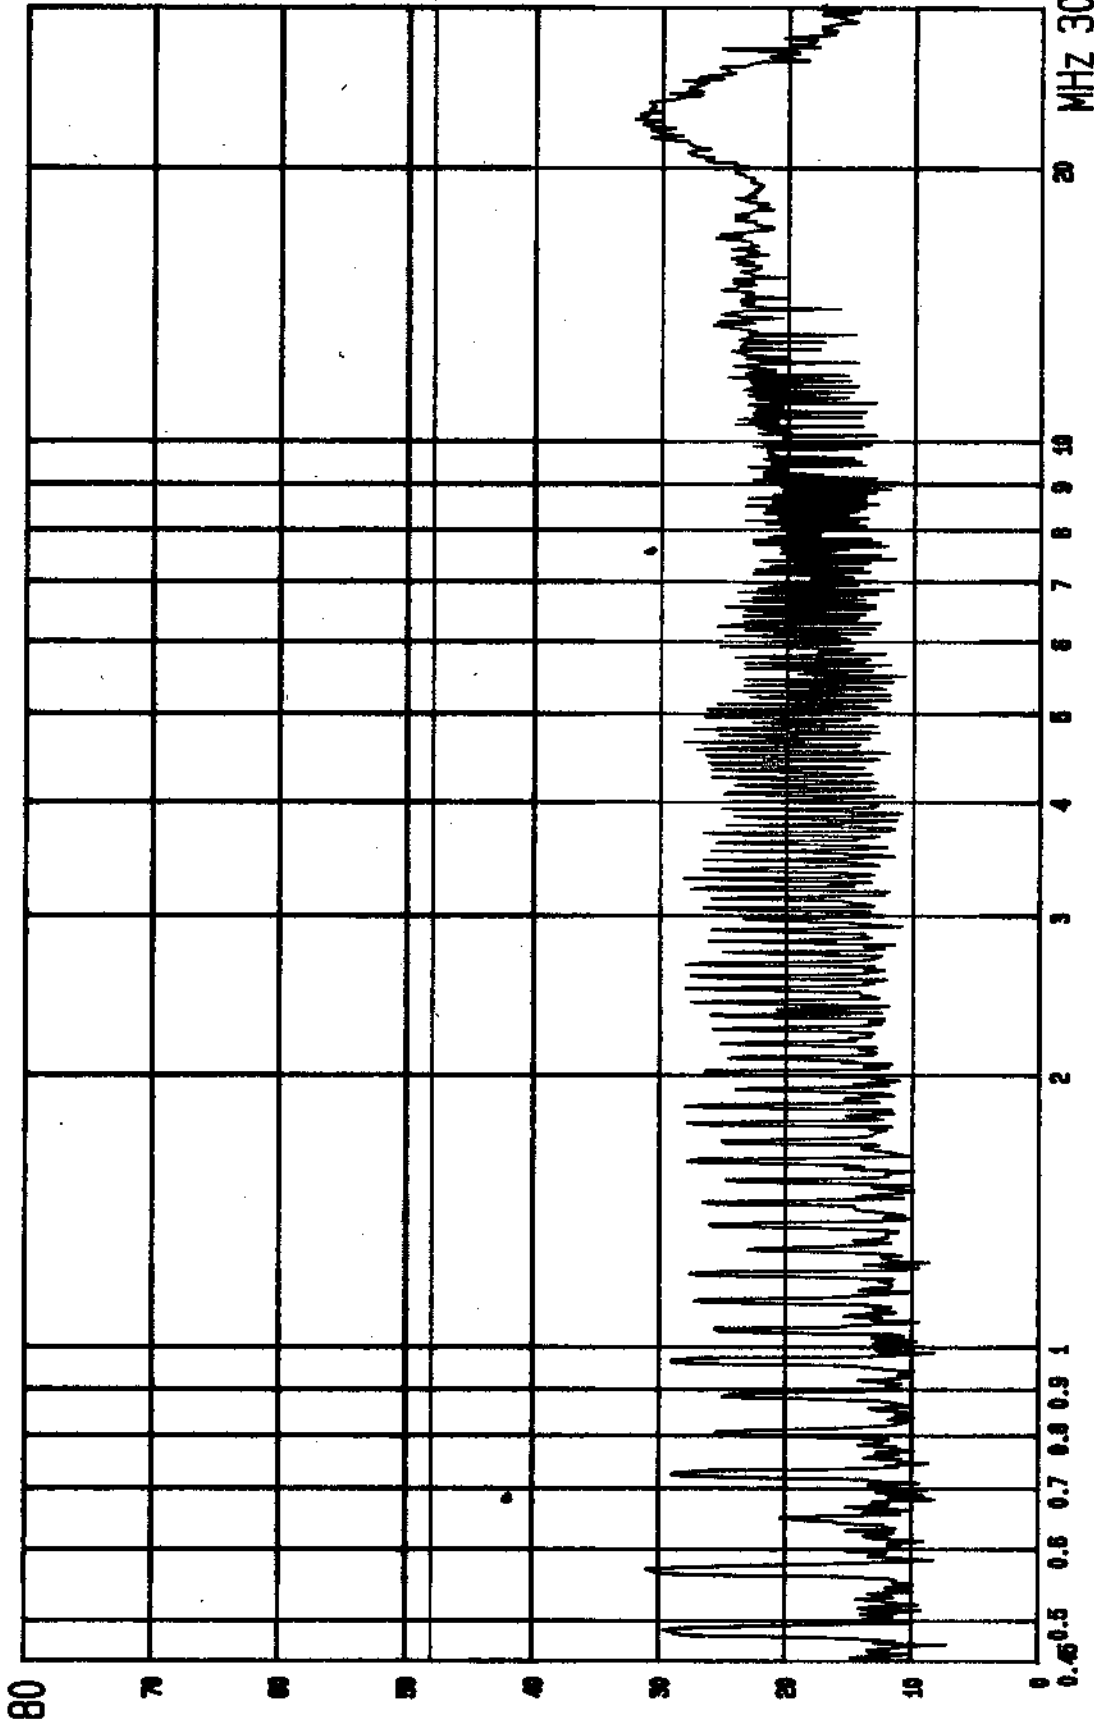

--- Date 22.MAY.'91 Time 17:35:28
FCC CONDUCTED TEST EUT:Wireless LAN CARD
MODEL: XI-350 POWER: 120V/60HZ

LISN: N 4:QP., CLASS B LIMIT
MODE: CH MID ETC EMI LAB.


dBuV

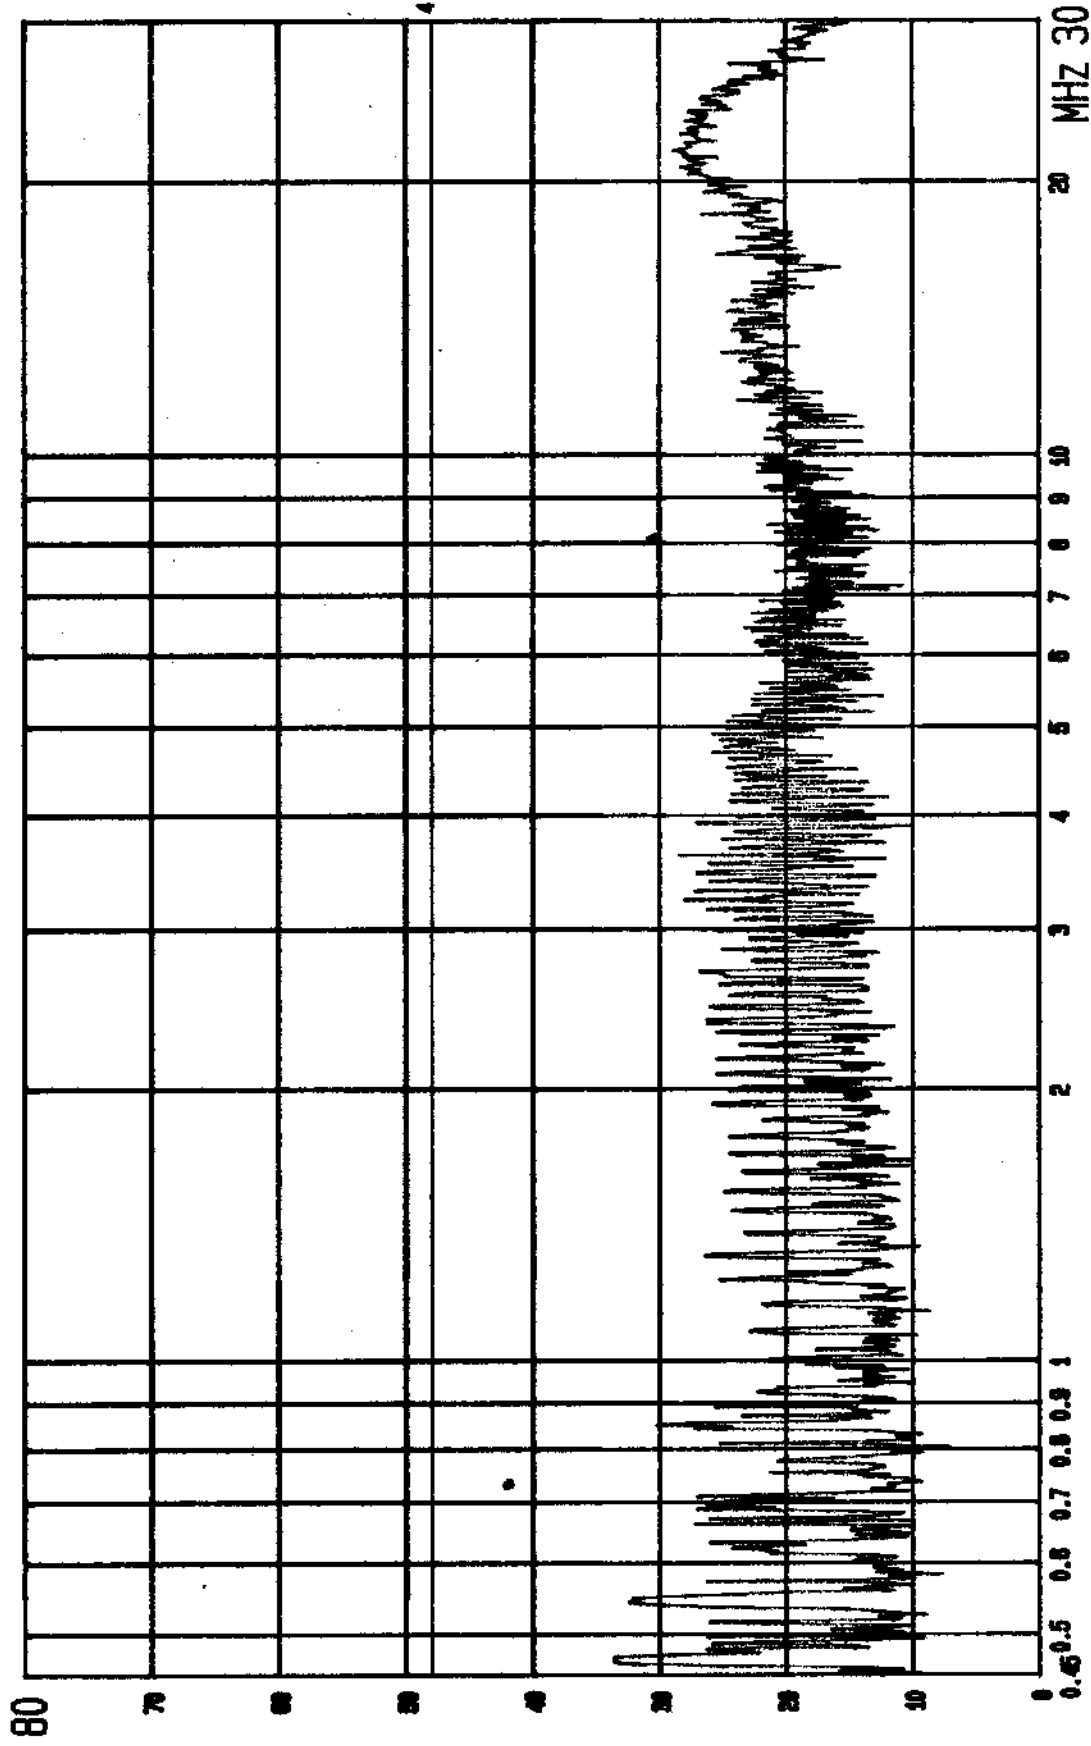

FCC CONDUCTED TEST
MODEL: XI-350
EUT: Wireless LAN CARD
POWER: 120V/60HZ

LISN: L1 4:QP., CLASS B LIMIT
MODE: CH MID ETC EMI LAB.

dBuV

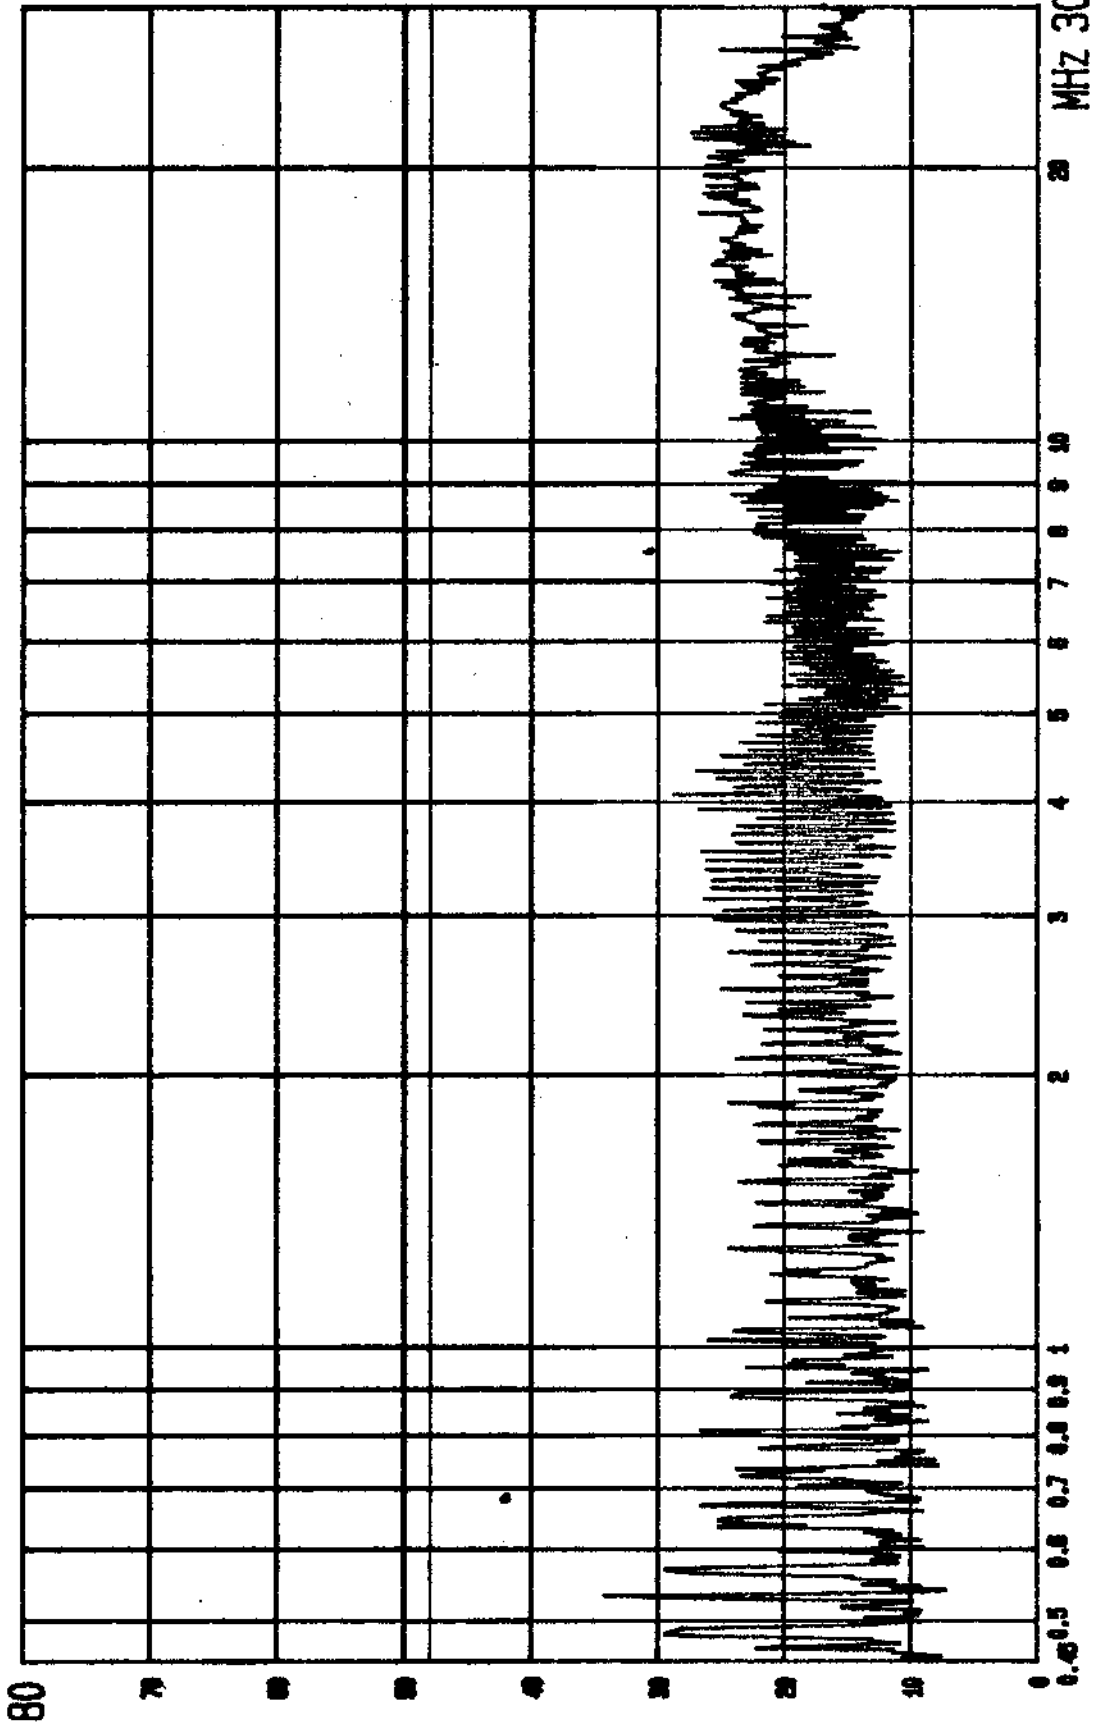


LISN: N 4:QP., CLASS B LIMIT
MODE: CH HIGH ETC EMI LAB.

EUT: Wireless LAN CARD
POWER: 120V/60HZ

FCC CONDUCTED TEST
MODEL: XI-350

dBuV

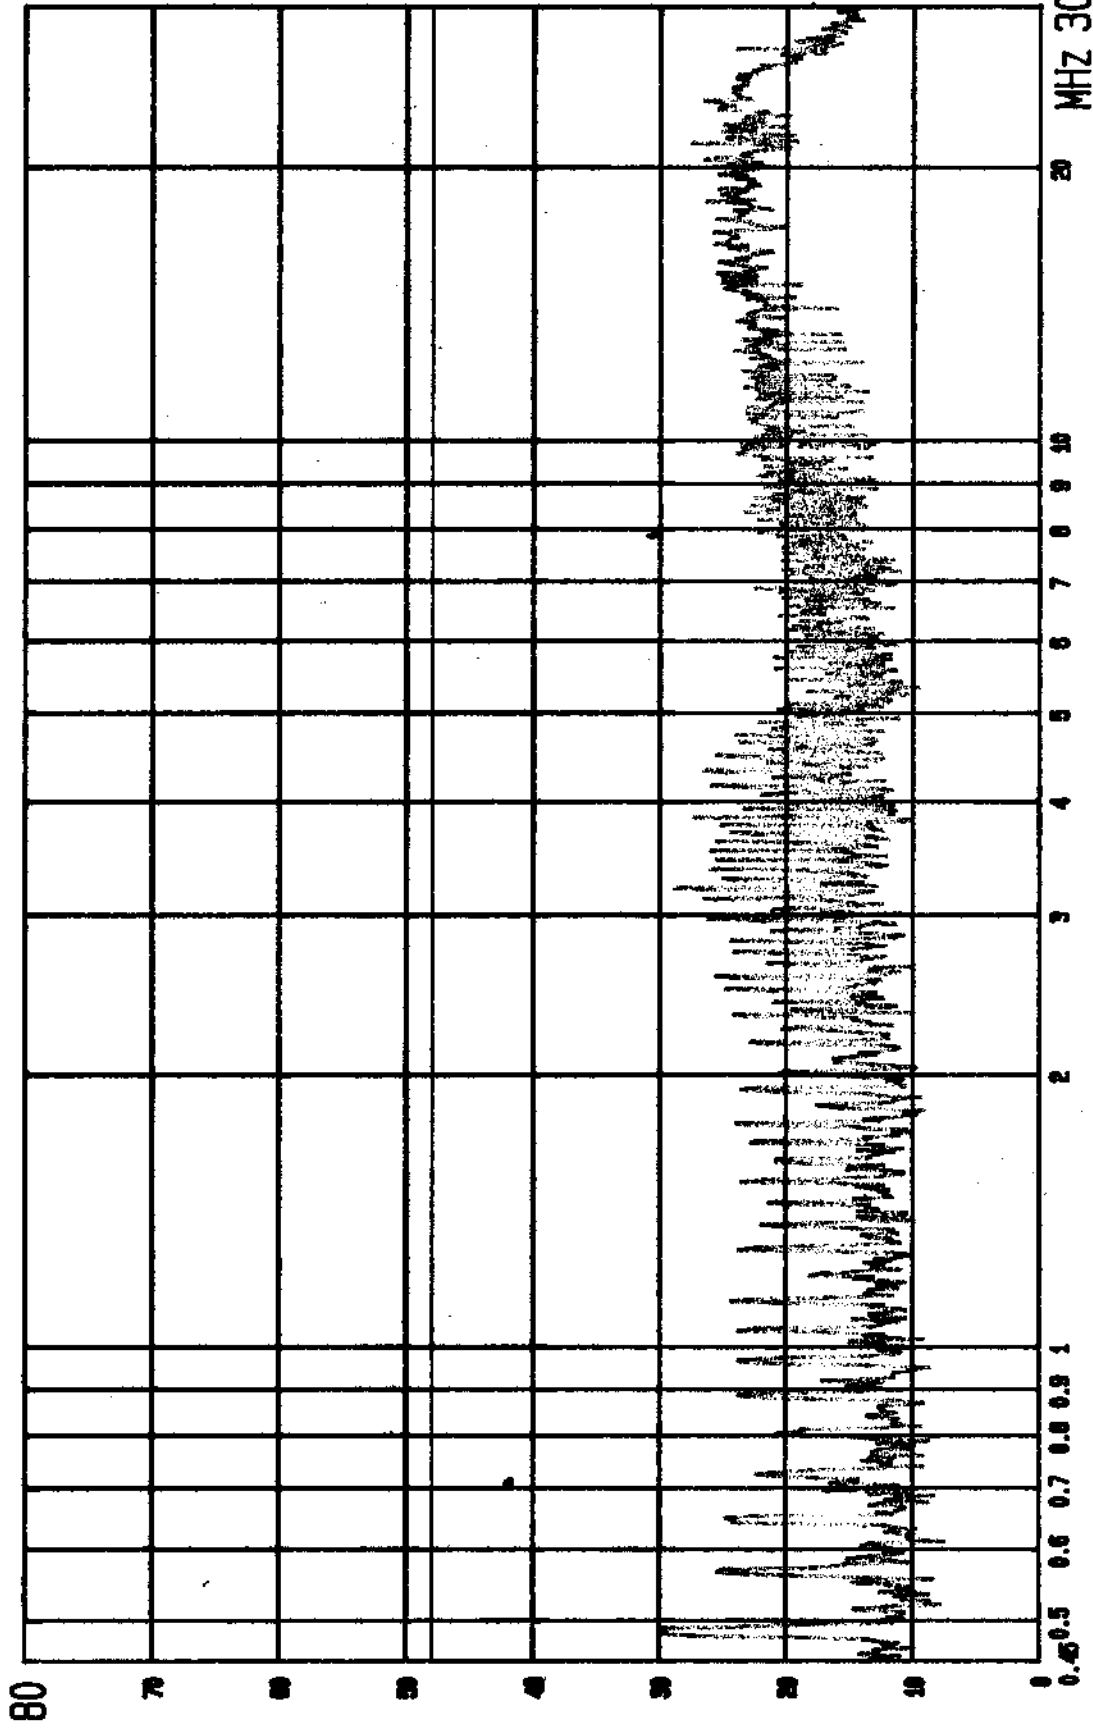

FCC CONDUCTED TEST
MODEL: XI-350

EUT: Wireless LAN CARD
POWER: 120V/60HZ


LISN: L1 4:QP., CLASS B LIMIT
MODE: CH HIGH ETC EMI LAB.

Appendix 2 : Ploted Datas of Emissions Bandwidth

ATTEN 30dB
RL 21.0dBm

ΔMKR -.17dB
12.00MHz

10dB/

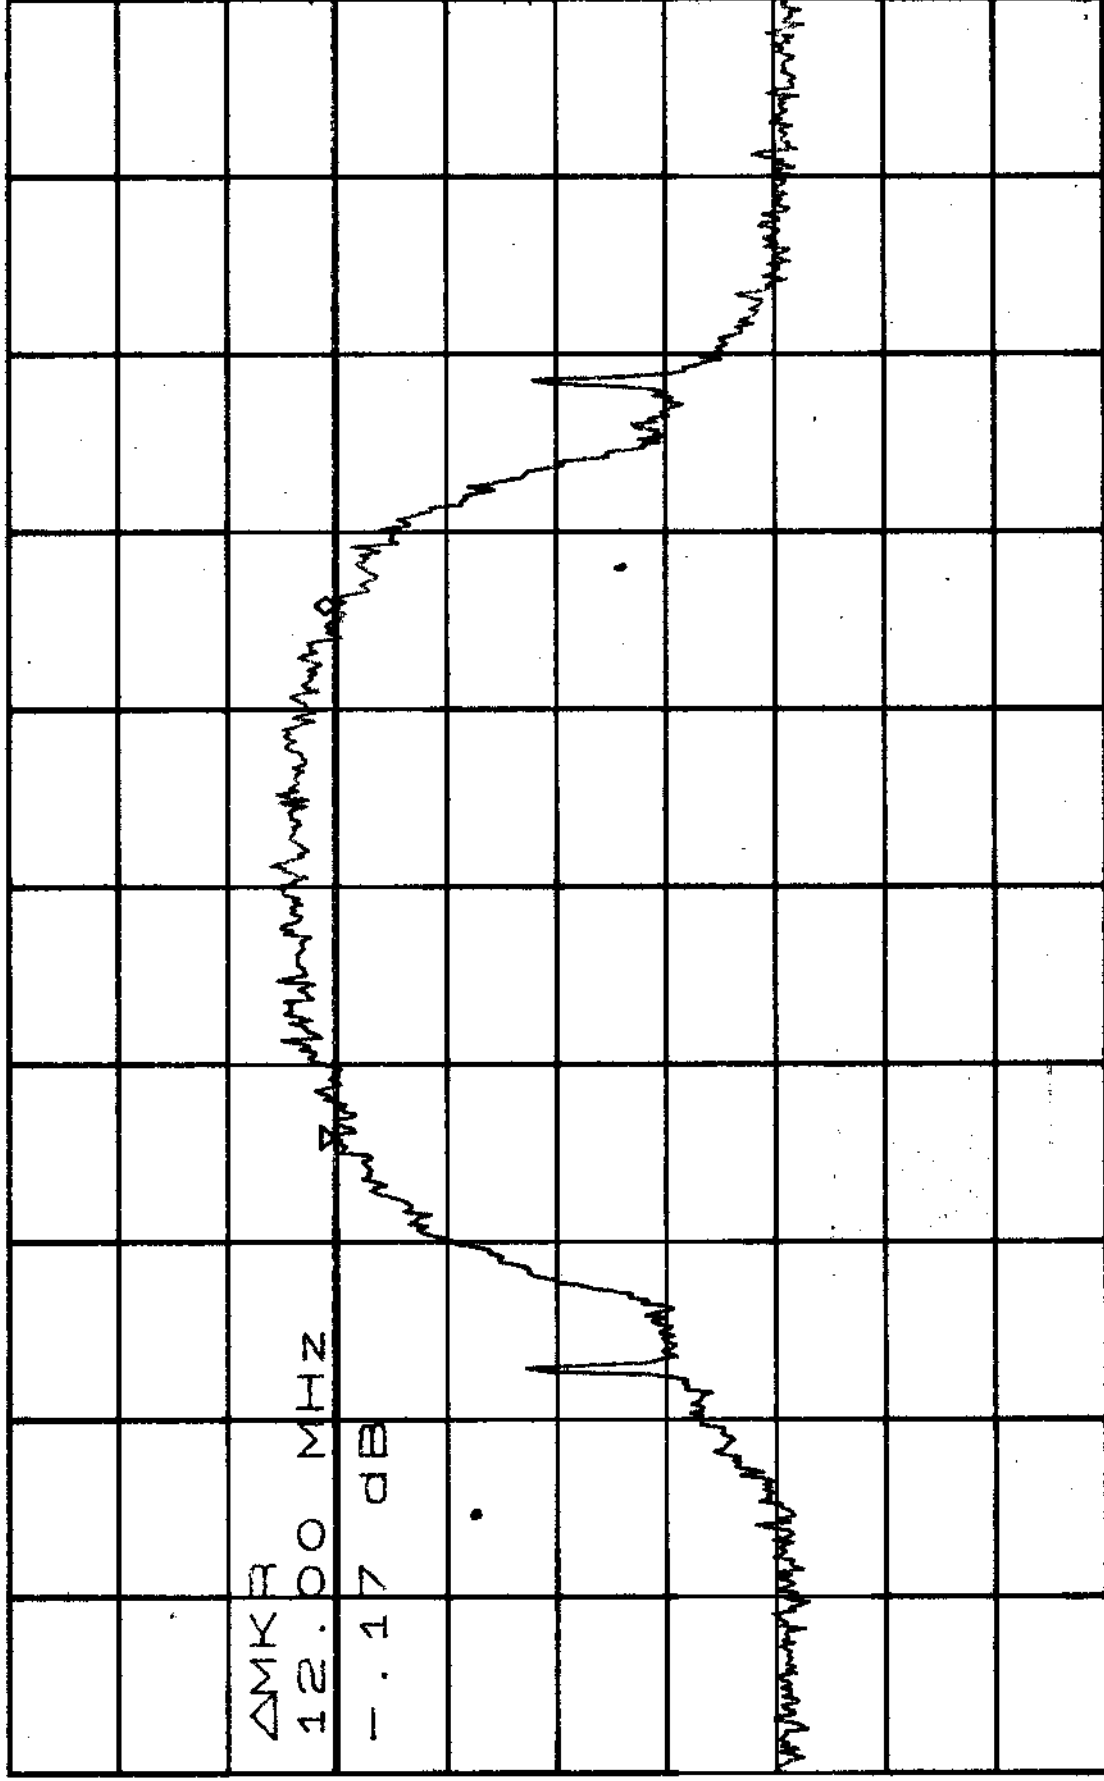

DS

CENTER 2.41200GHZ

SPAN 40.00MHZ

*RBW 100KHZ

*VBW 100KHZ

*SWP 1.00sec


ATTEN 30dB

ΔMKR -.84dB

RL 21.0dBm

12.13MHz

10dB/

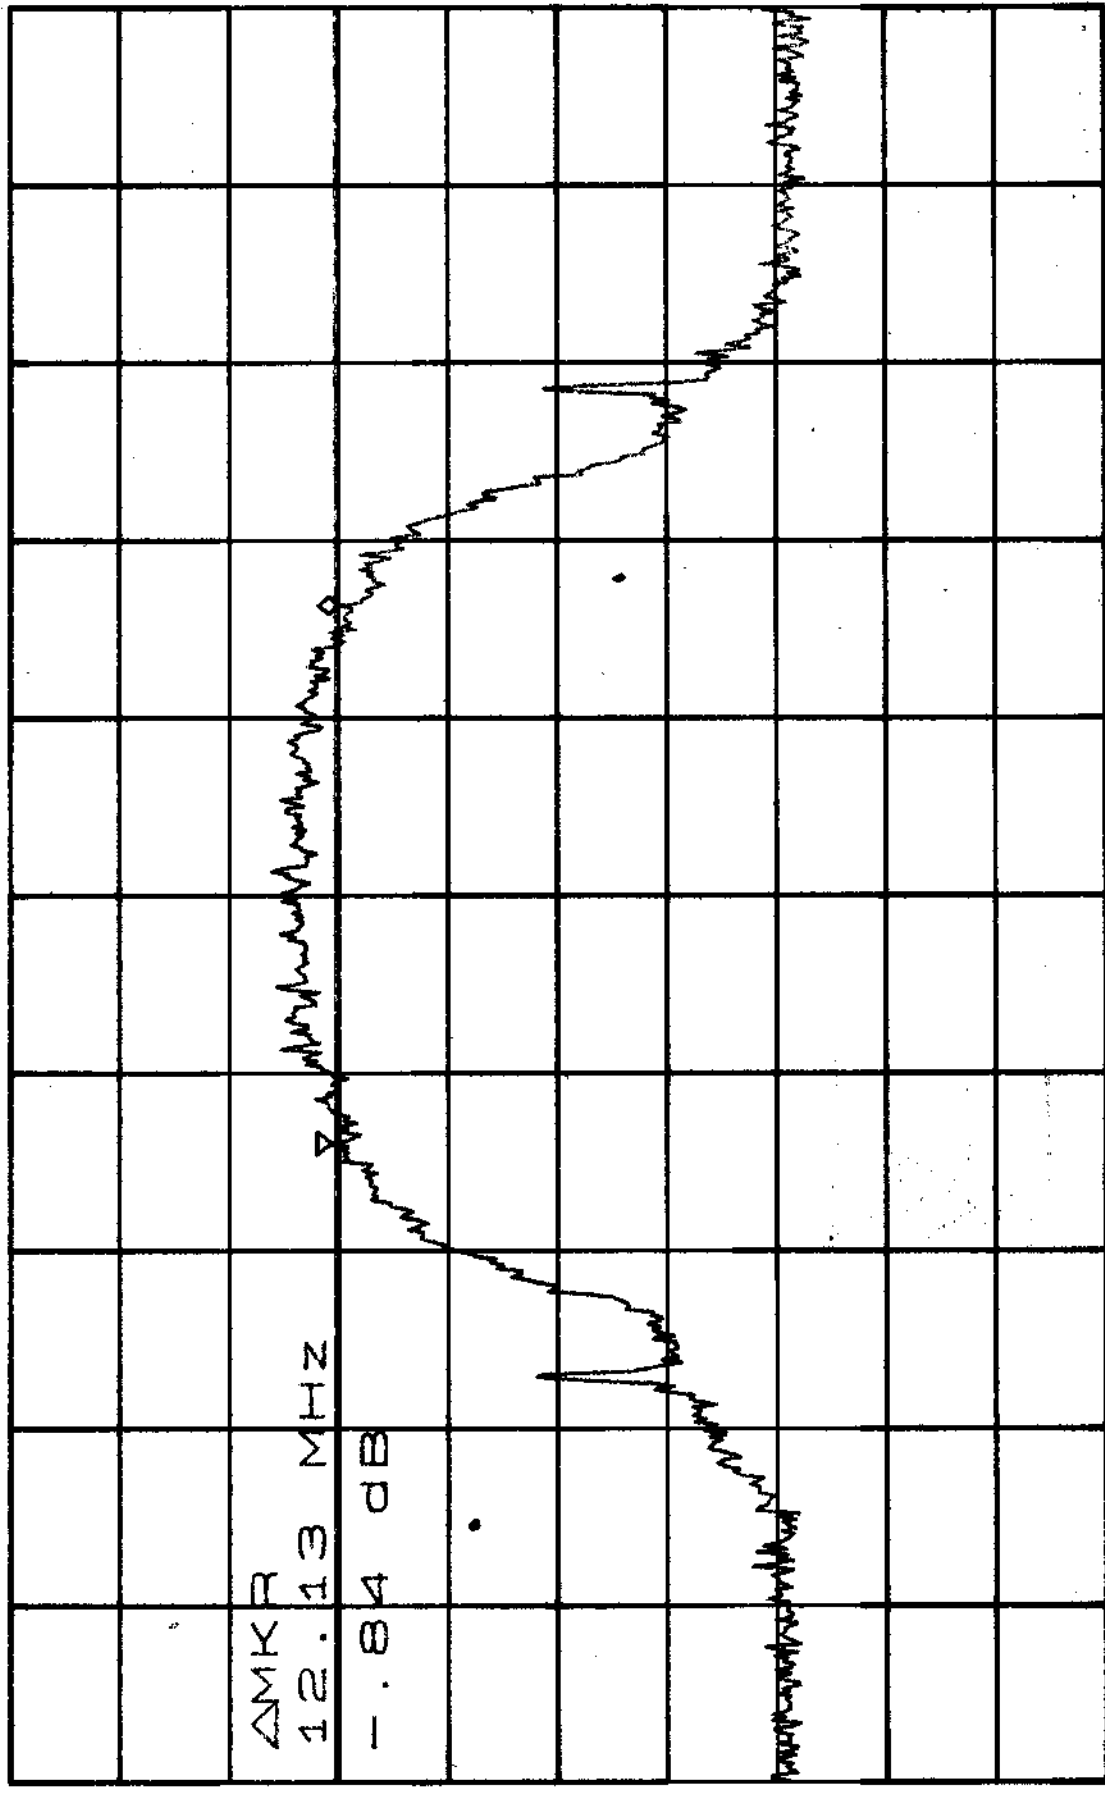

CENTER 2.44200GHZ


SPAN 40.00MHZ

*RBW 100KHZ

*VBW 100KHZ

*SWP 1.00sec

ATTEN 30dB ΔMKR -.17dB
RL 21.0dBm 12.33MHz / 10dB/

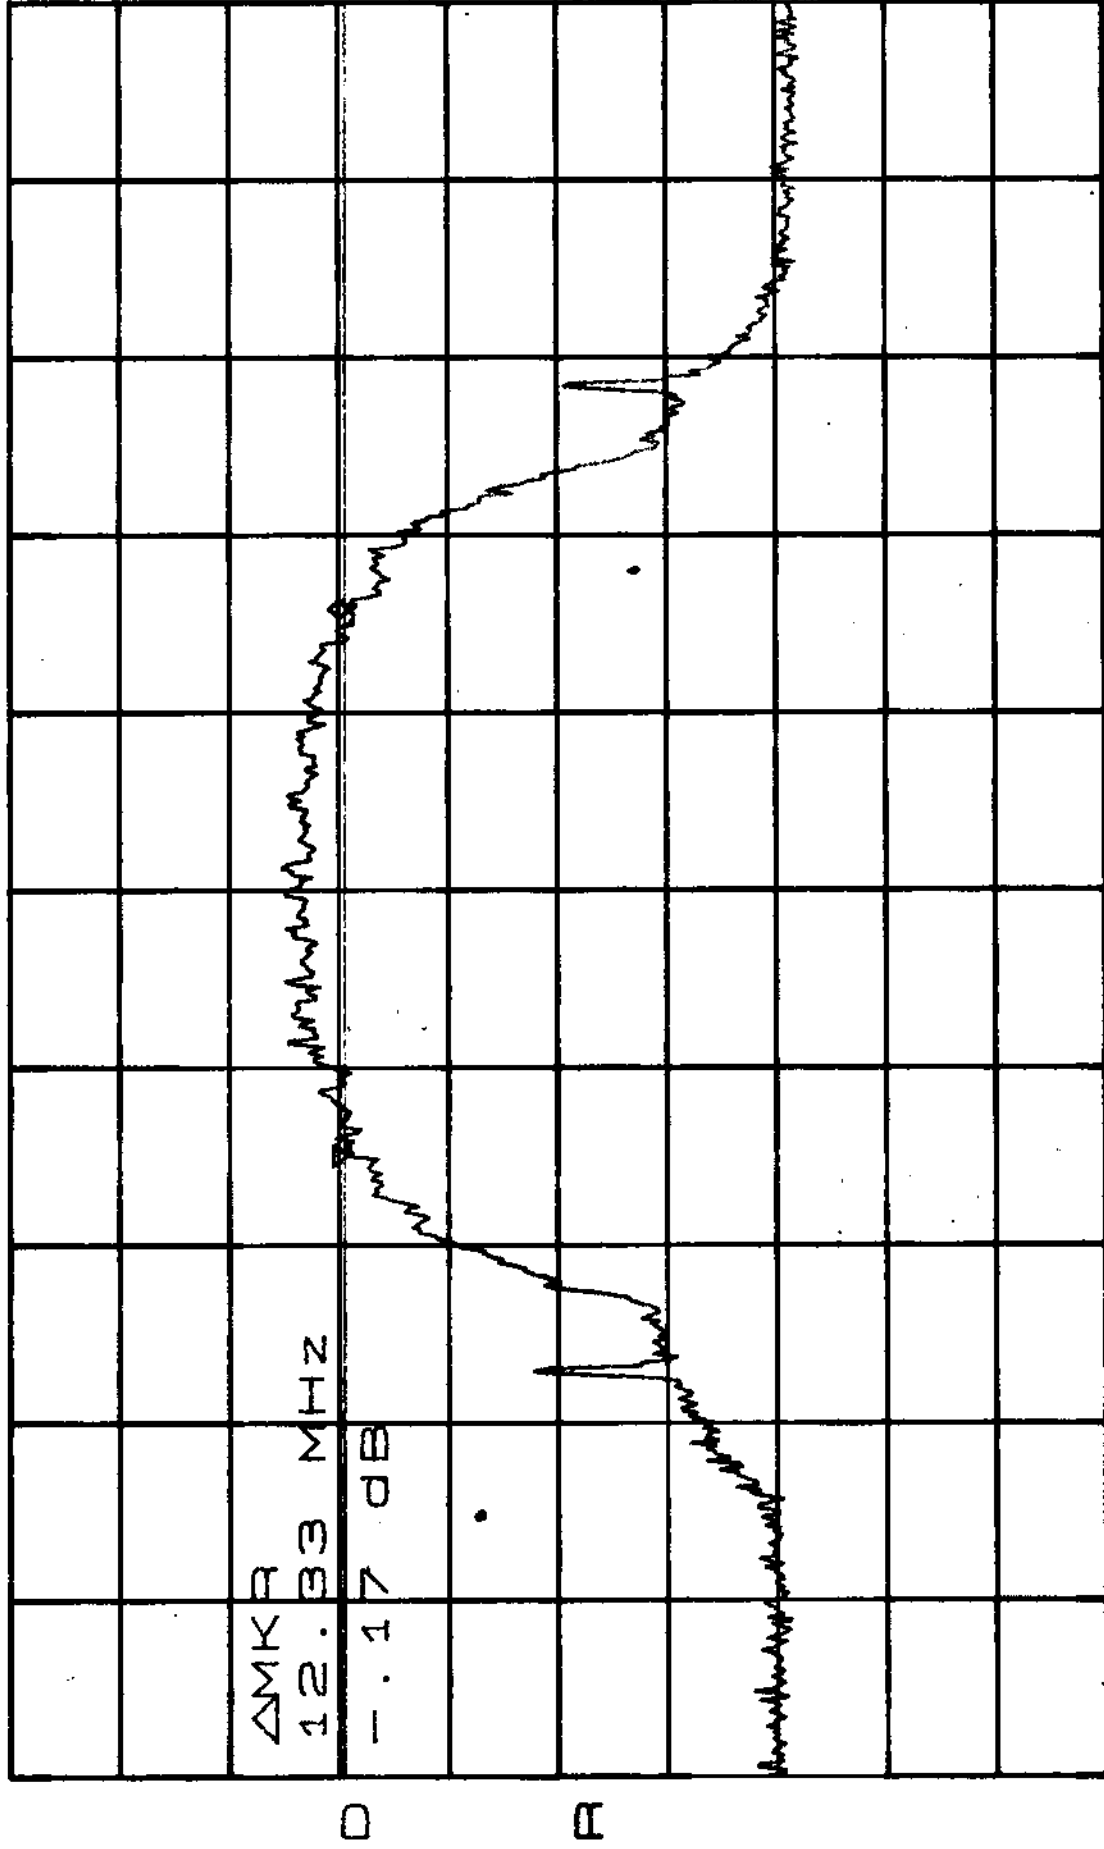


CENTER 2.46200GHZ SPAN 40.00MHZ
*RBW 100KHZ *VBW 100KHZ *SWP 1.00sec

Appendix 3 : Ploted Datas of Output Peak Power

ATTEN 30dB
RL 21.0dBm


10dB/

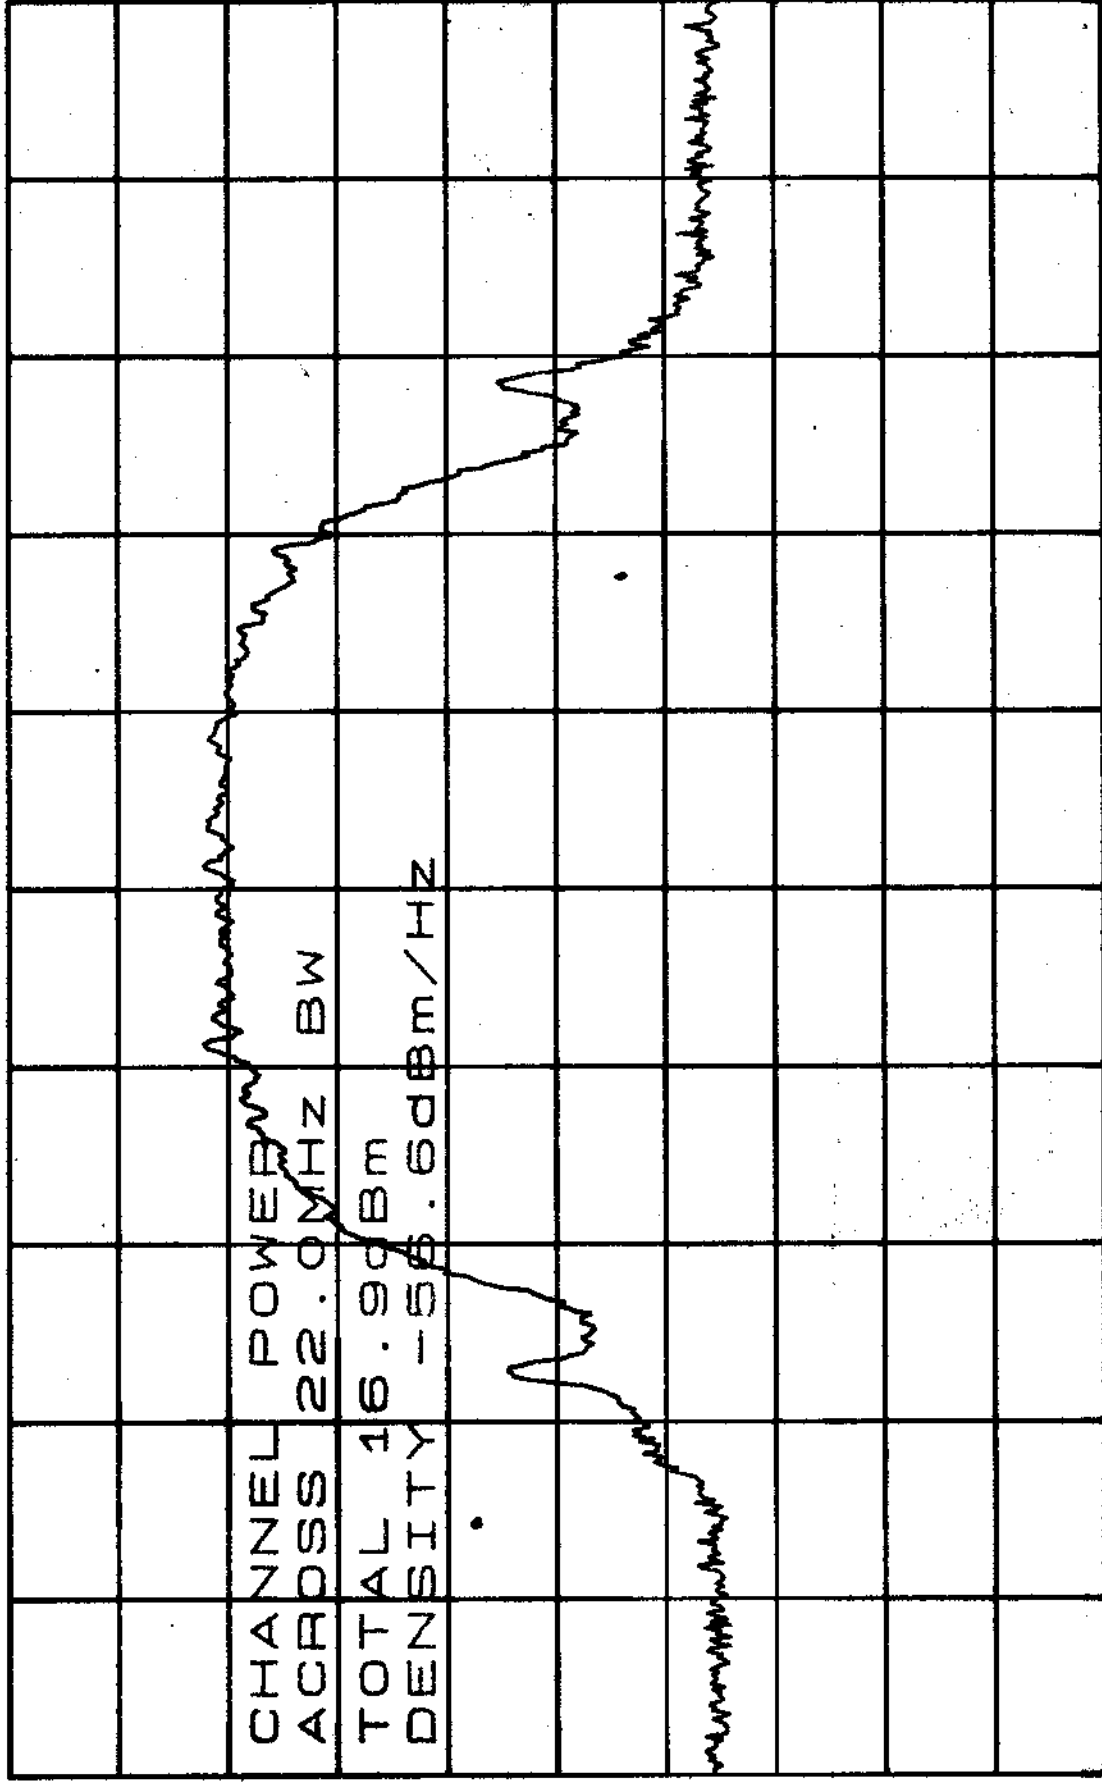

CENTER 2.41200GHz
RBW 300kHz
SPAN 40.00MHz
VBW 300kHz
*SWP 1.00sec

ATTEN 30dB
RL 21.0dBm

10dB/

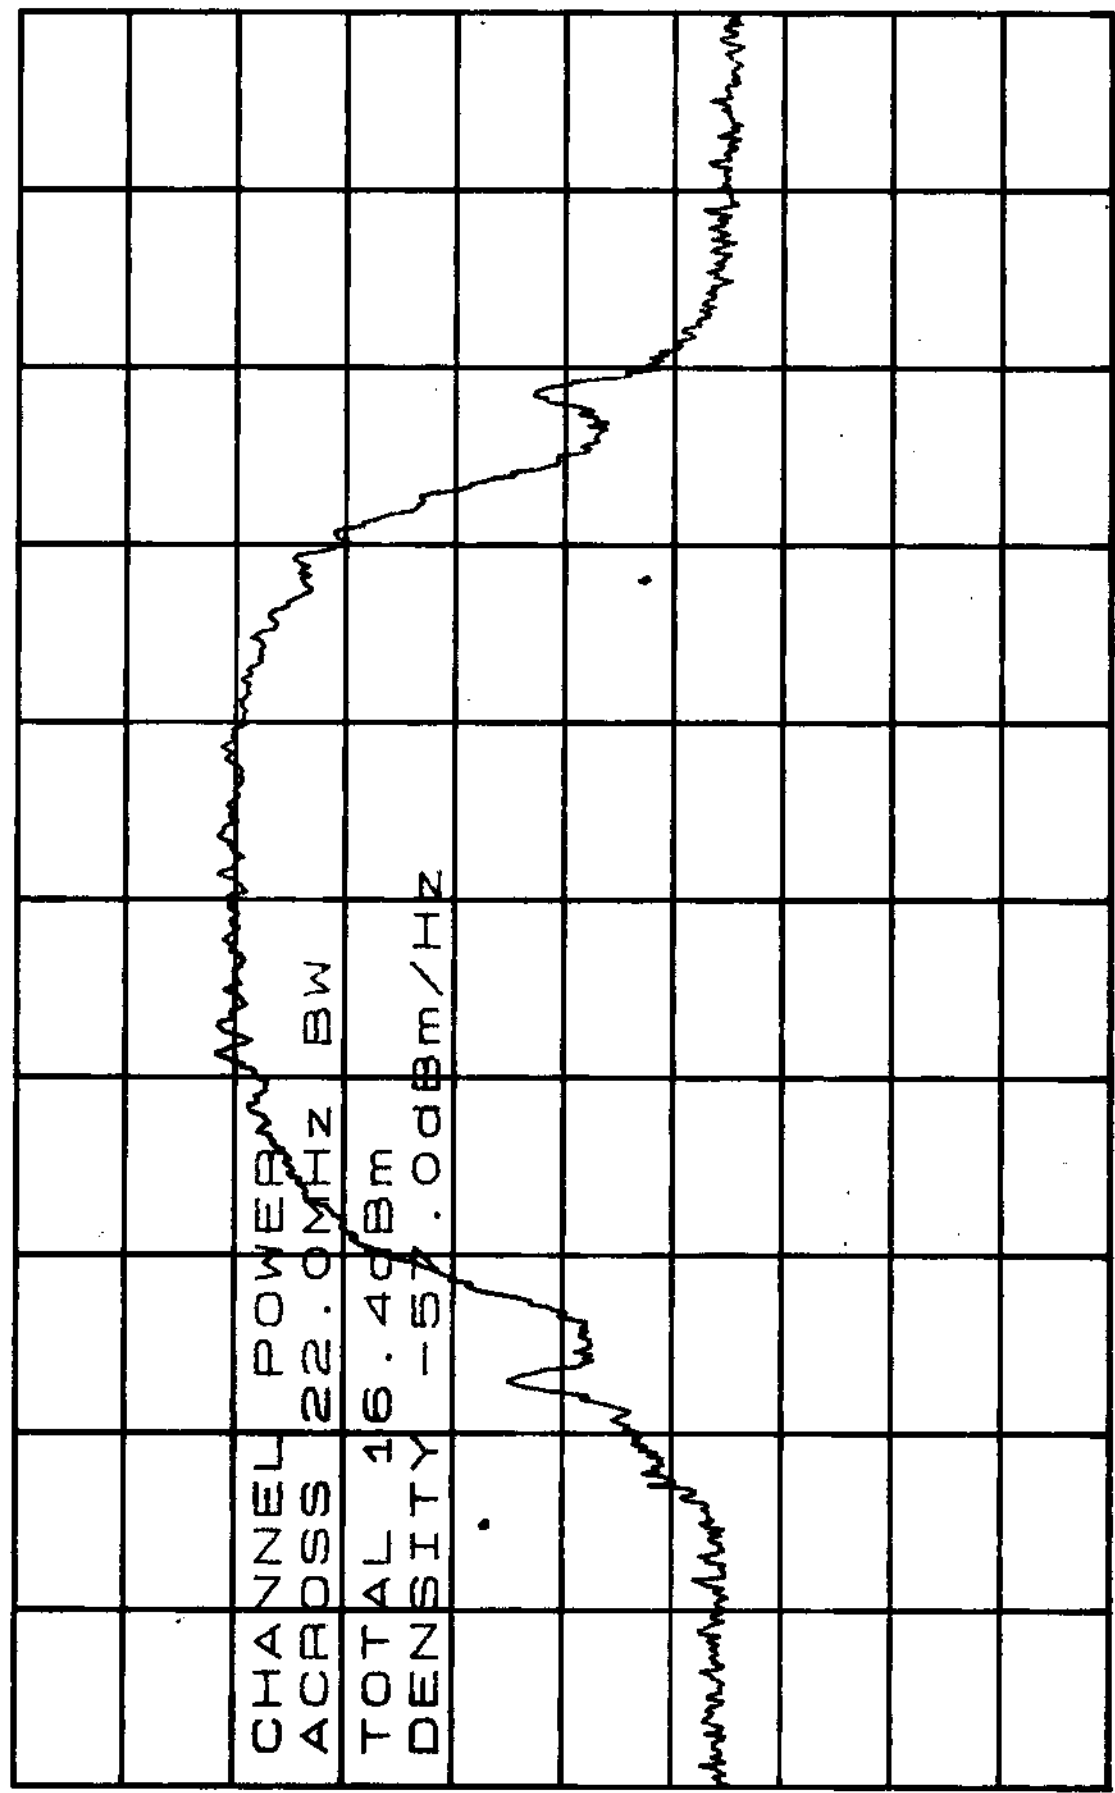

DS R

CENTER 2.44200GHz
RBW 300kHz
SPAN 40.00MHz
VBW 300kHz
*SWP 1.00sec

ATTEN 30dB

RL 21.0dBm


10dB/

CHANNEL POWER

ACROSS 22.0MHz BW

TOTAL 15.8dBm

DENSITY -57.7dBm/Hz

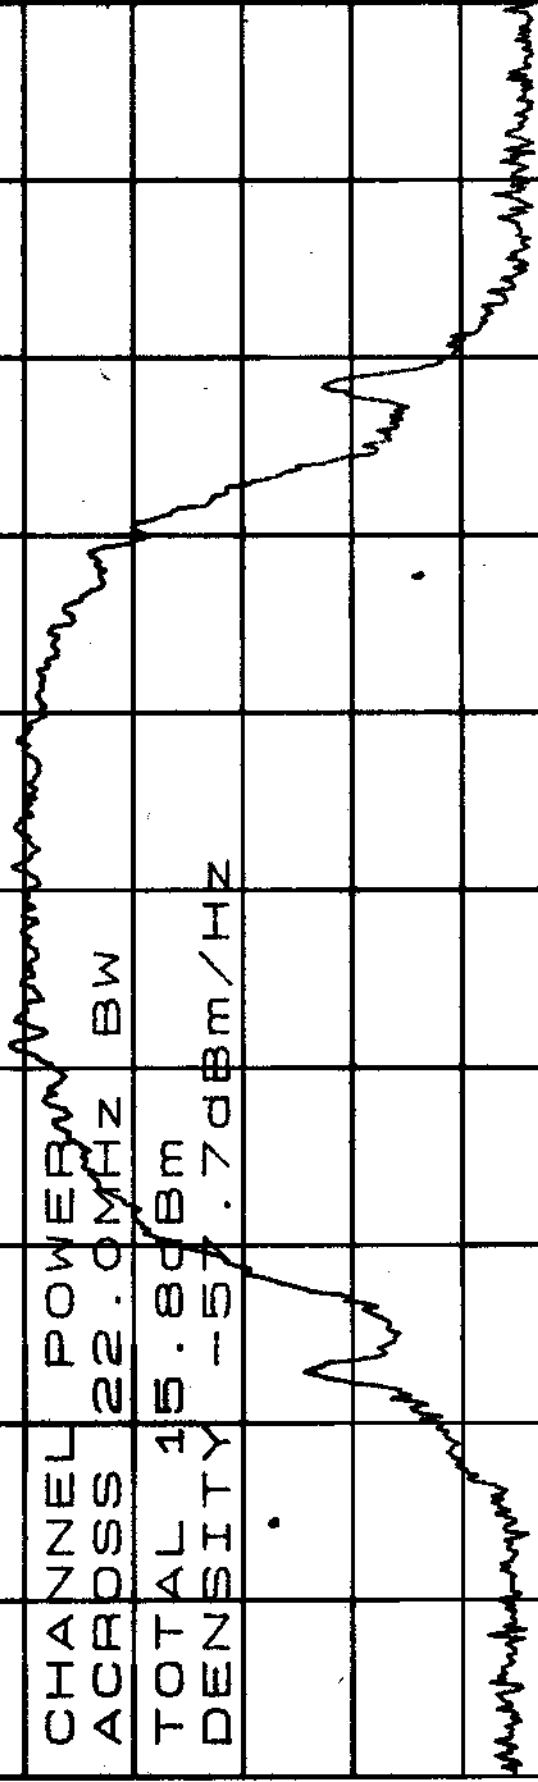

CENTER 2.46200GHz

RBW 300kHz

VBW 300kHz

SPAN 40.00MHz


*SWP 1.00sec

Appendix 4 : Ploted Datas of Band Edge Emission

ATTEN 30dB
RL 20.0dBm

MKR -42.00dBm
2.39973GHz

10dB/

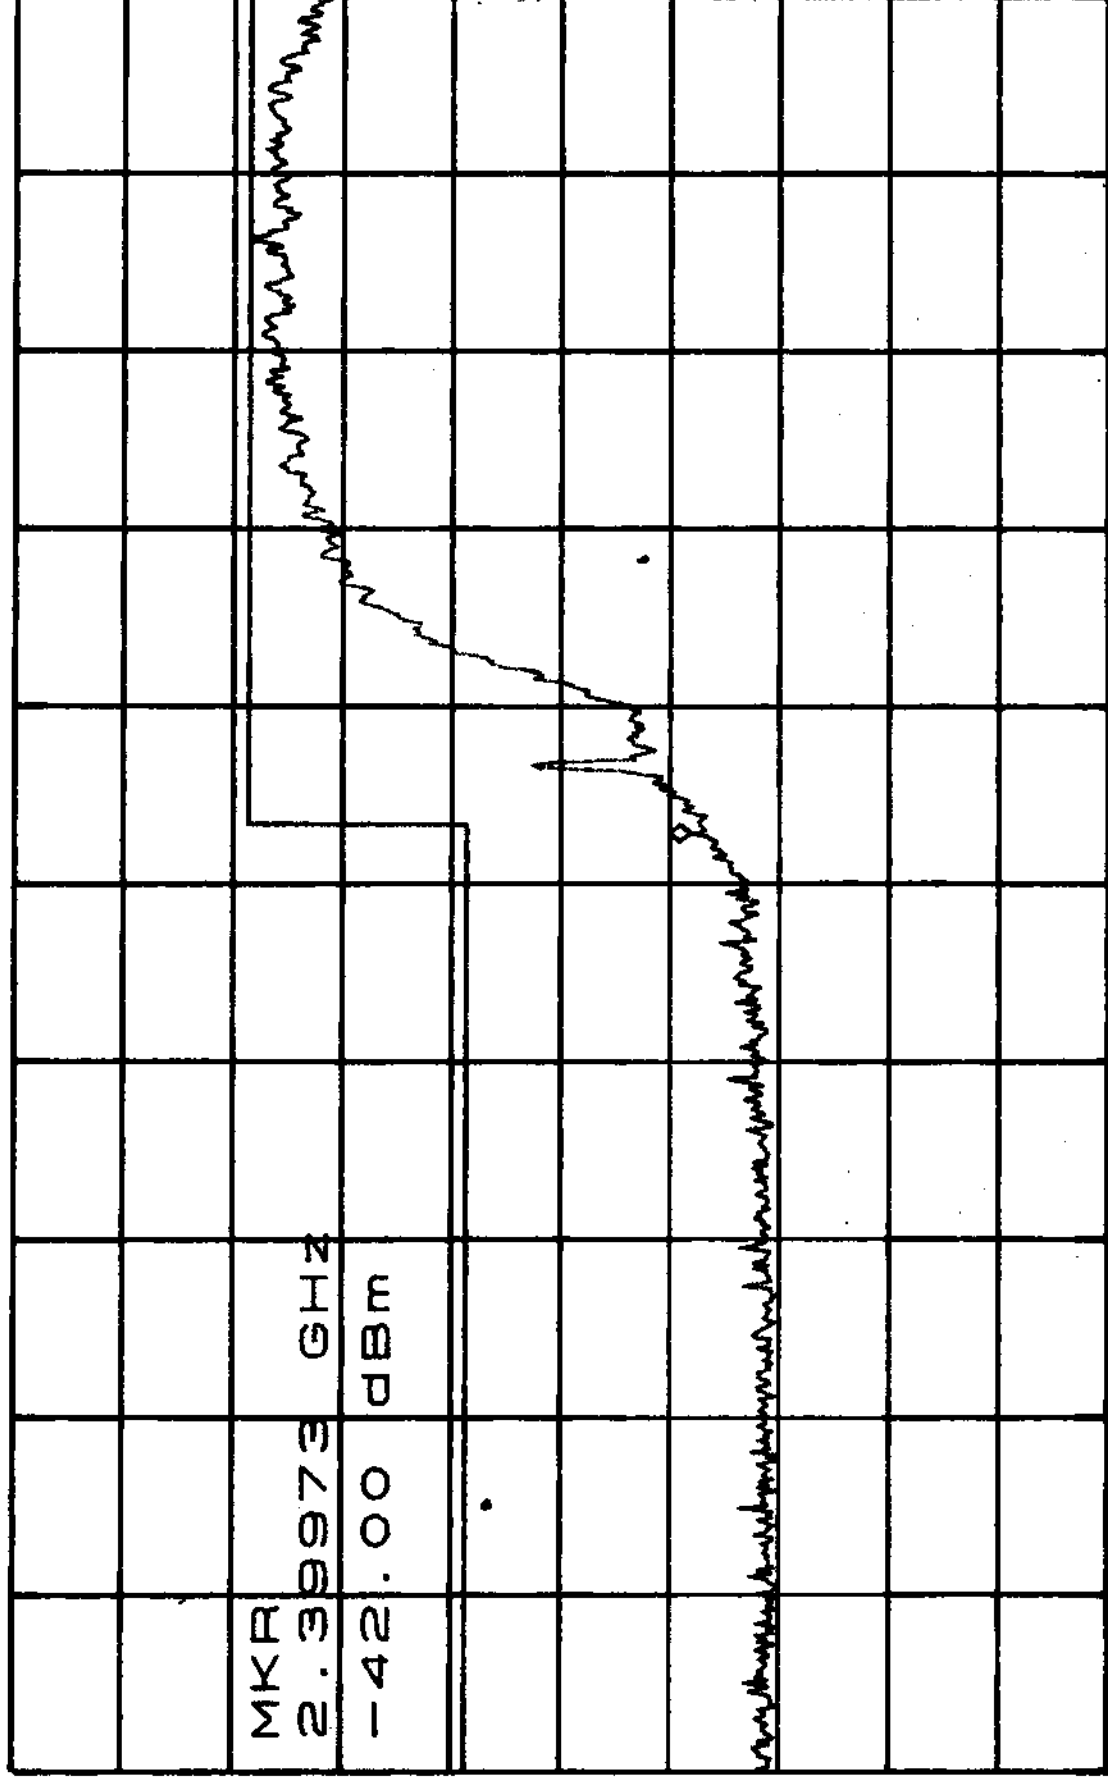

CENTER 2.39860GHz

SPAN 40.00MHz

*RBW 100kHz


VBW 100kHz

*SWP 1.00sec

ATTEN 30dB
RL 20.0dBm

MKR -48.67dBm
2.49013GHz

10dB/

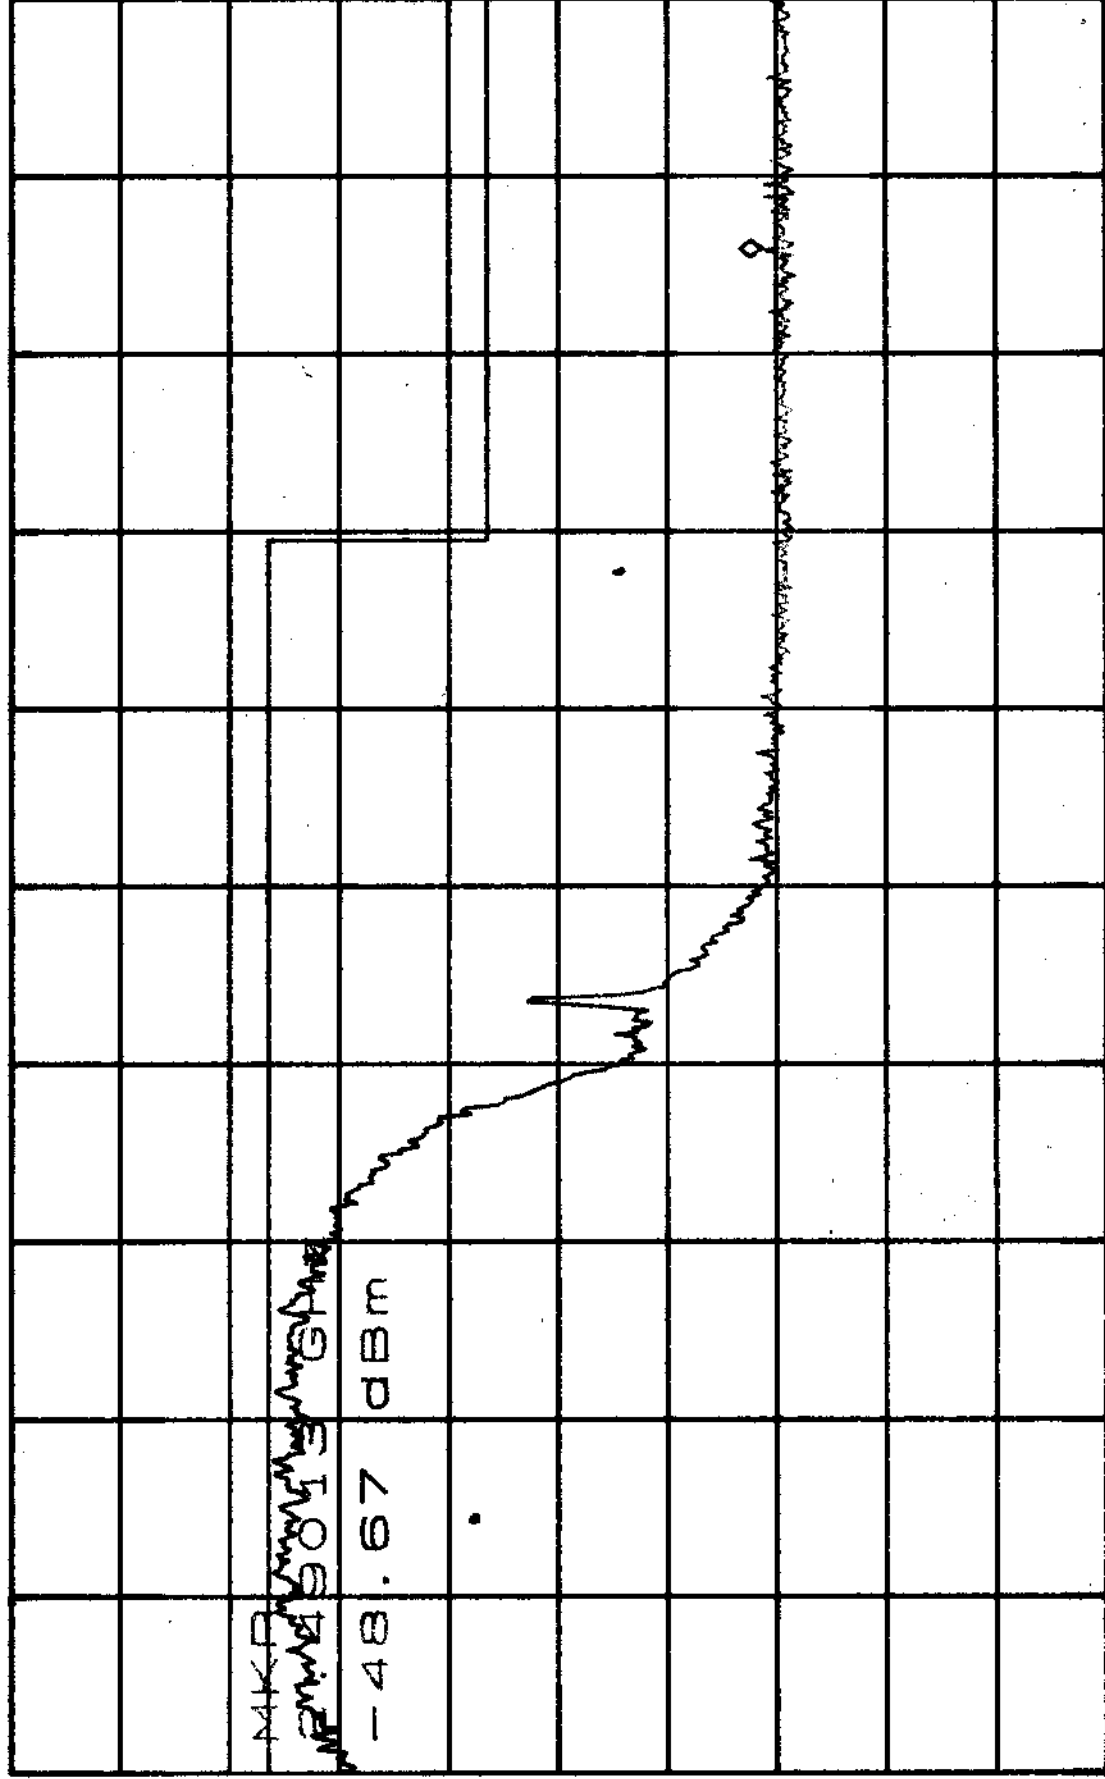

MKR
-48.67 dBm
2.49013GHz

CENTER 2.47580GHz

SPAN 40.00MHz

*RBW 100kHz

VBW 100kHz

*SWP 1.00sec

Appendix 5 : Ploted Datas of Power Density


ATTEN 30dB
RL 21.0dBm

MKR -16.83dBm
2.4136298GHz

10dB/

MKR
2.4136298 GHz
-16.83 dBm

D S R

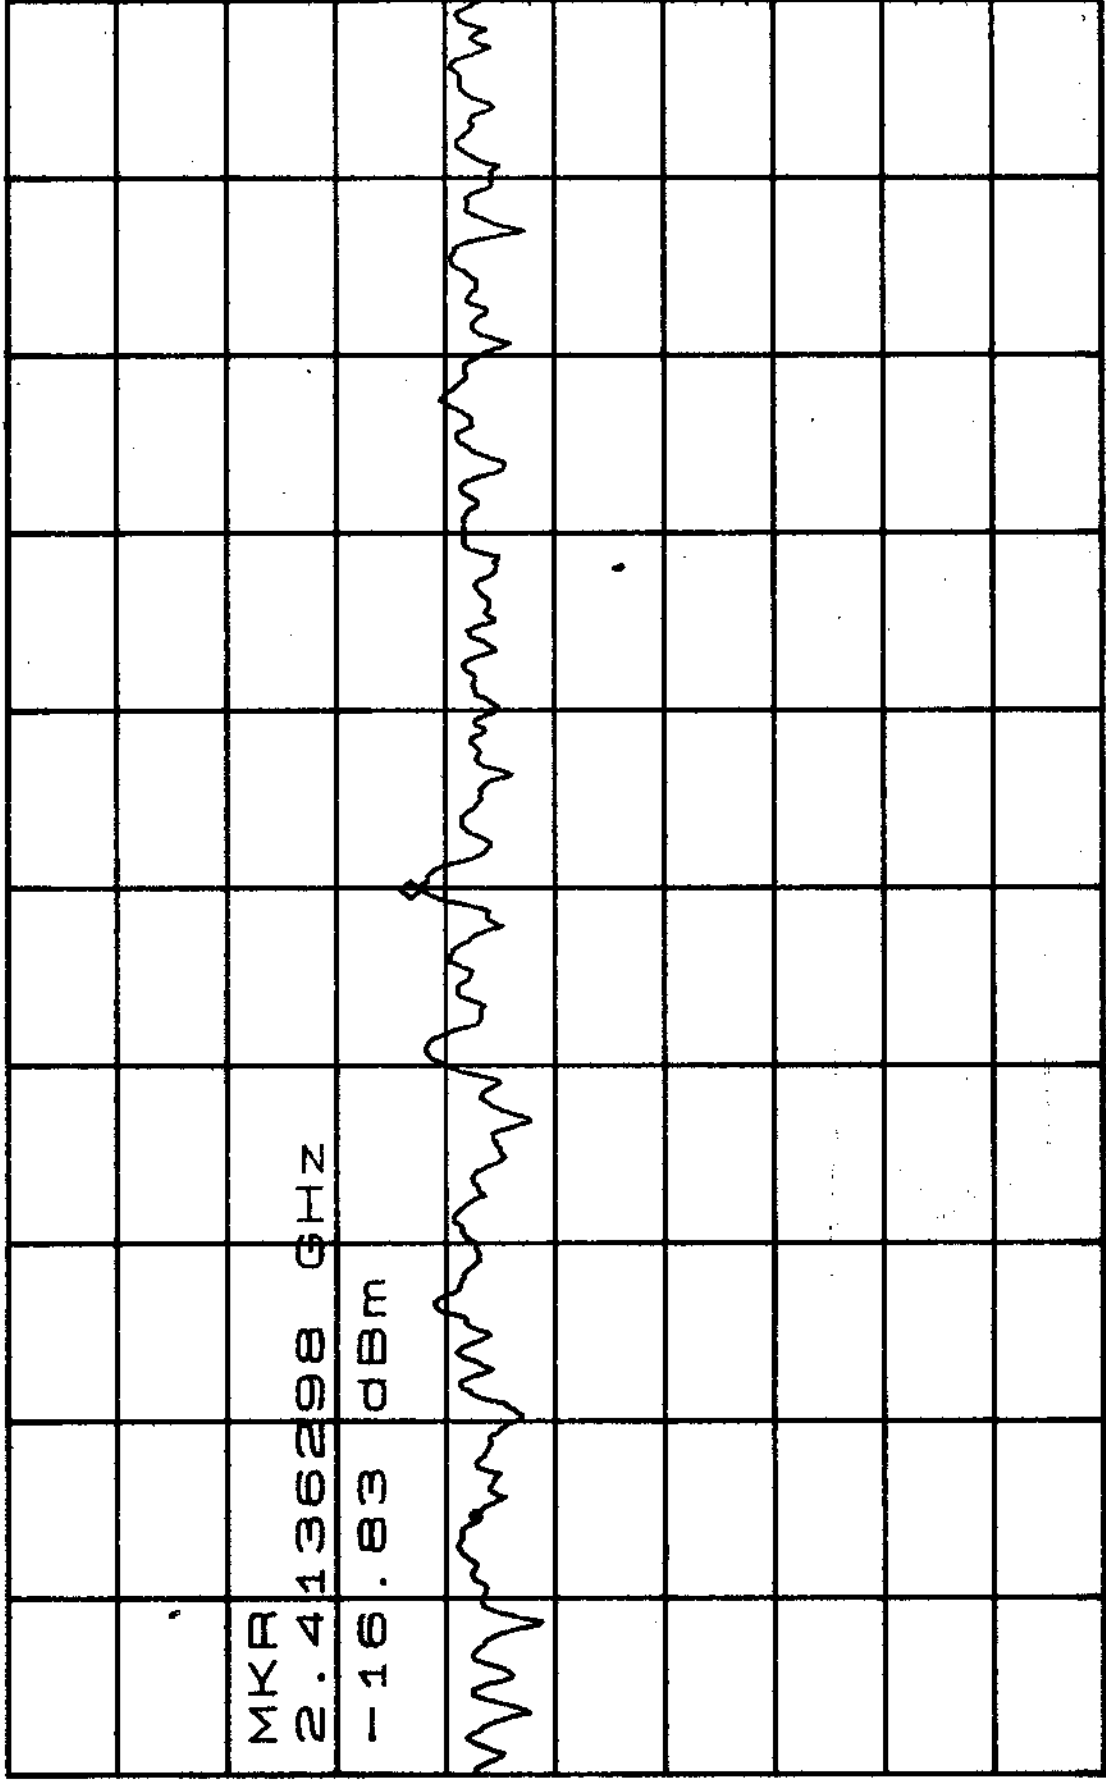

CENTER 2.4136303GHz
*RBW 3.0KHZ *VBW 30KHZ

SPAN 300.0KHZ
*SWP 100sec


ATTEN 30dB

MKR -15.83dBm

RL 21.0dBm

2.4429945GHz

10dB/

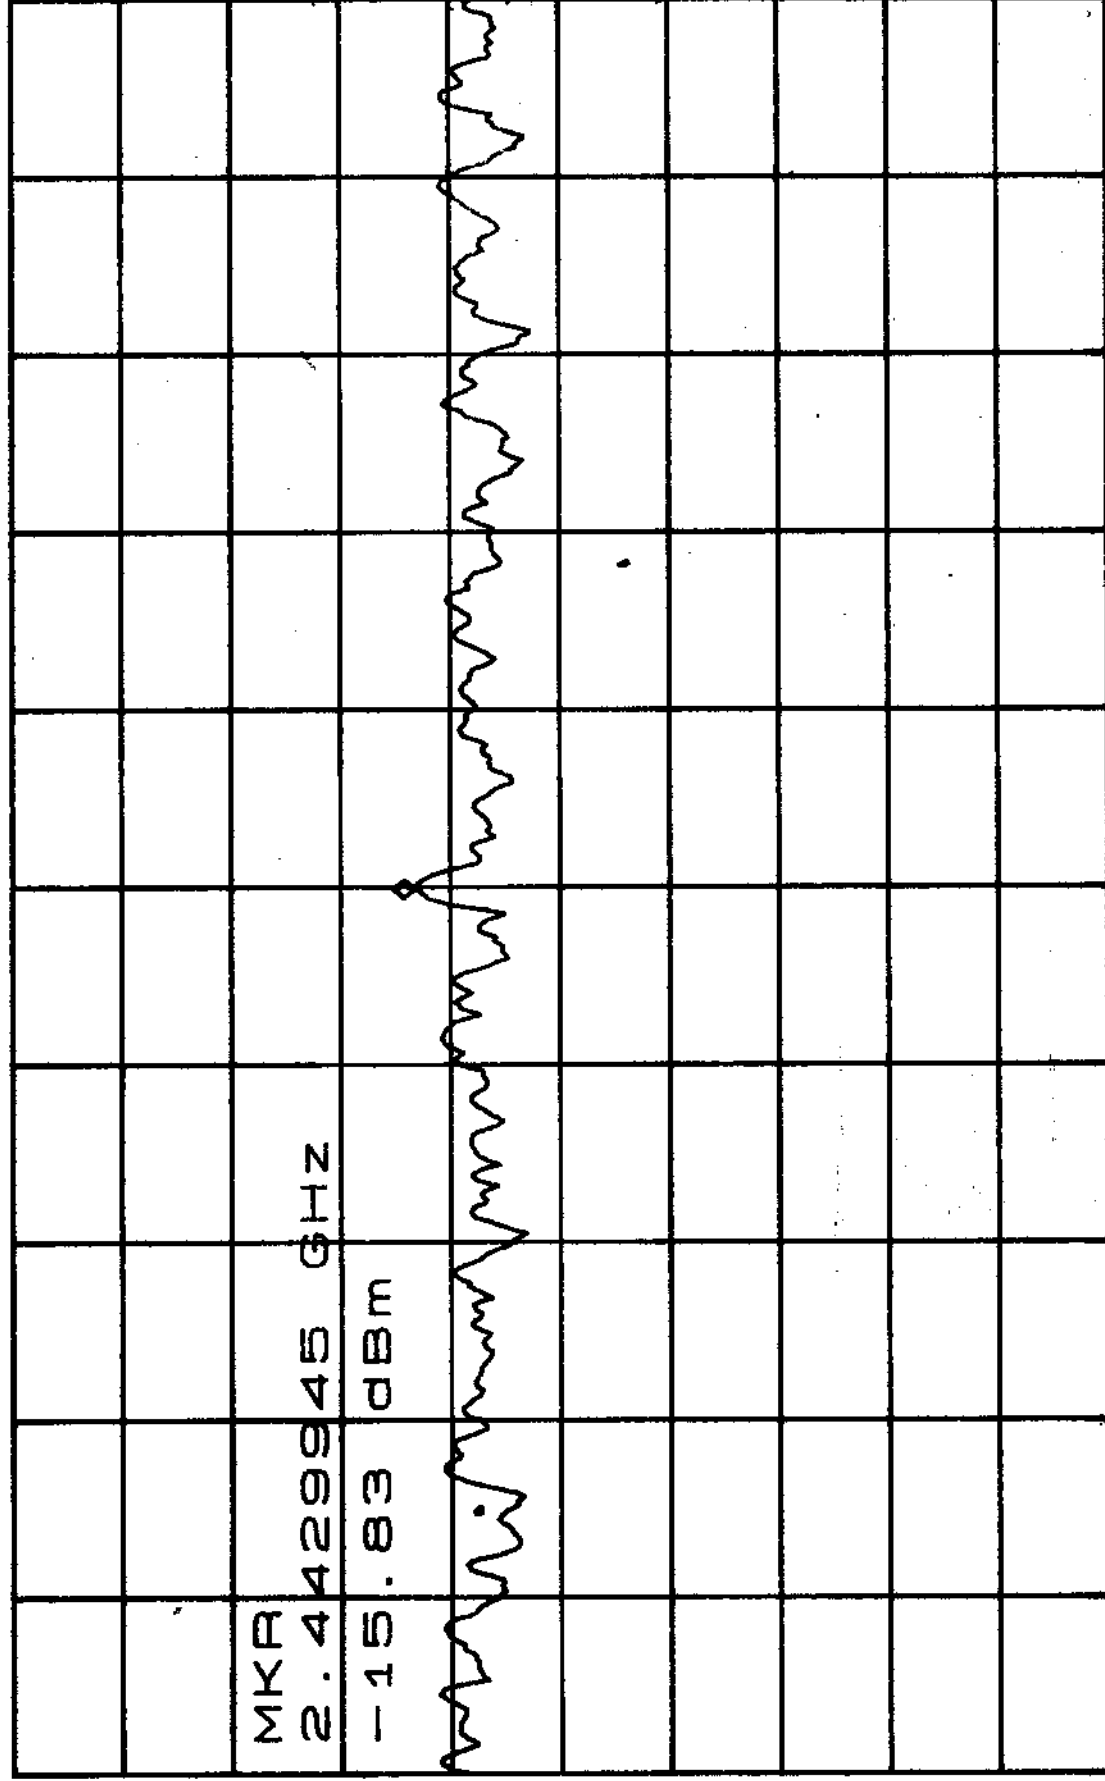

D

R

CENTER 2.4429950GHz

SPAN 300.0KHz

*RBW 3.0KHz

*VBW 30KHz

*SWP 100sec


ATTEN 30dB
RL 21.0dBm

MKR -19.33dBm
2.4618195GHz

10dB/

MKR
2.4618195 GHz
-19.33 dBm

DS R

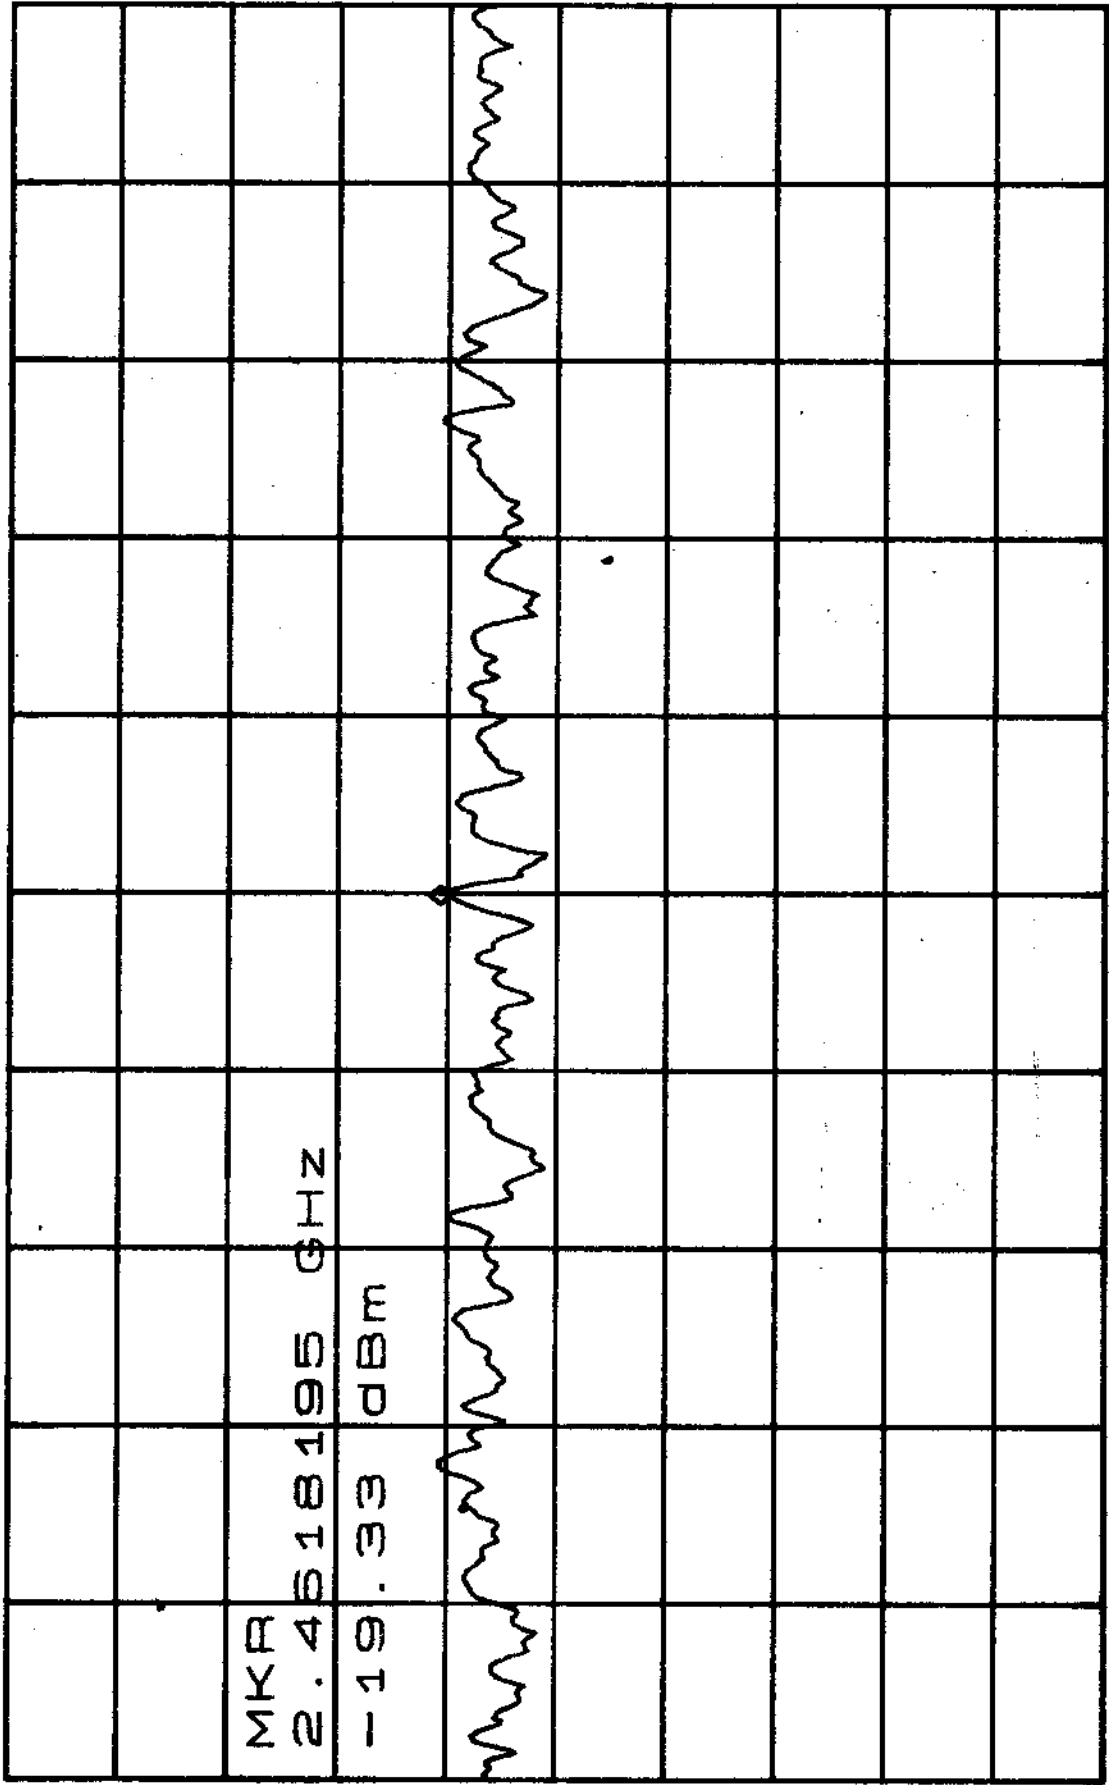

CENTER 2.4618200GHZ
*RBW 3.0KHZ
SPAN 300.0KHZ
*SWP 100sec