



EMC Technologies (NZ) Ltd  
PO Box 68-307  
Newton, Auckland 1145  
New Zealand  
Phone 09 360 0862  
Fax 09 360 0861  
E-Mail Address: aucklab@ihug.co.nz  
Web Site: www.emctech.com.au

## **TEST REPORT**

**Gallagher C300480 T15 Proximity Card Reader**

*tested to*

**47 Code of Federal Regulations**

**Part 15 - Radio Frequency Devices**

**Subpart C – Intentional Radiators**

**Section 15.209**

*and*

**Section 15.225**

**Operation within the band 13.110 -14.010 MHz**

*for*

**Gallagher Group Ltd**

This Test Report is issued with the authority of:

A handwritten signature in black ink, appearing to read "Andrew Cutler".

**Andrew Cutler- General Manager**



All tests reported  
herein have been  
performed in accordance  
with the laboratory's  
scope of accreditation

## **Table of Contents**

|                                      |           |
|--------------------------------------|-----------|
| <b>1. STATEMENT OF COMPLIANCE</b>    | <b>3</b>  |
| <b>2. RESULTS SUMMARY</b>            | <b>3</b>  |
| <b>3. INTRODUCTION</b>               | <b>4</b>  |
| <b>4. CLIENT INFORMATION</b>         | <b>4</b>  |
| <b>5. DESCRIPTION OF TEST SAMPLE</b> | <b>4</b>  |
| <b>6. SETUPS AND PROCEDURES</b>      | <b>5</b>  |
| <b>7. TEST EQUIPMENT USED</b>        | <b>21</b> |
| <b>8. ACCREDITATIONS</b>             | <b>21</b> |
| <b>9. PHOTOGRAPHS</b>                | <b>22</b> |

## 1. STATEMENT OF COMPLIANCE

The **Gallagher C300480 T15 Proximity Card Reader** complies with FCC Part 15 Subpart C Section 15.225 as an Intentional Radiator when the methods as described in ANSI C63.4 - 2003 are applied.

## 2. RESULTS SUMMARY

The results from testing carried out in May 2016 are summarised in the following table:

| Clause | Parameter                                     | Result                                                |
|--------|-----------------------------------------------|-------------------------------------------------------|
| 15.201 | Equipment authorisation requirement           | Certification required.                               |
| 15.203 | Antenna requirement                           | Complies. Antennas internal to the device.            |
| 15.204 | External PA and antenna modifications         | Not applicable. No external devices.                  |
| 15.205 | Restricted bands of operation                 | Complies. Device transmits on 13.560 MHz and 125 kHz. |
| 15.207 | Conducted limits                              | Complies.                                             |
| 15.209 | Radiated emission limits - Emissions < 30 MHz | Complies.                                             |
| 15.209 | Radiated emission limits – Emissions > 30 MHz | Complies.                                             |
| 15.225 | Radiated emission limits - Fundamental        | Complies.                                             |
| 15.225 | Frequency stability                           | Complies                                              |

### 3. INTRODUCTION

This report describes the tests and measurements performed for the purpose of determining compliance with the specification.

**The client selected the test sample.**

**This report relates only to the sample tested.**

**This report contains no corrections or erasures.**

Measurement uncertainties with statistical confidence intervals of 95% are shown below test results. Both Class A and Class B uncertainties have been accounted for, as well as influence uncertainties where appropriate.

This report replaces report number 160108.1 to address issues raised during the FCC certification process.

### 4. CLIENT INFORMATION

|                     |                     |
|---------------------|---------------------|
| <b>Company Name</b> | Gallagher Group Ltd |
| <b>Address</b>      | Kahikatea Drive     |
| <b>City</b>         | Hamilton            |
| <b>Country</b>      | New Zealand         |
| <b>Contact</b>      | Mr Brian Rose       |

### 5. DESCRIPTION OF TEST SAMPLE

|                            |                       |
|----------------------------|-----------------------|
| <b>Brand Name</b>          | Gallagher             |
| <b>Model Number Tested</b> | C300480 T15           |
| <b>Product</b>             | Proximity Card Reader |
| <b>Manufacturer</b>        | Gallagher Group Ltd   |
| <b>Country of Origin</b>   | New Zealand           |
| <b>Serial Number</b>       | 1619507001            |
| <b>FCC ID</b>              | M5VC30044X            |

The model tested is a dual mode transmitter operating on 125 kHz and 13.560 MHz.

## **6. SETUPS AND PROCEDURES**

### **Standard**

The sample was tested in accordance with 47 CFR Part 15 Subpart C.

### **Methods and Procedures**

The measurement methods and procedures as described in ANSI C63.4 - 2003 were used.

### **Section 15.201: Equipment authorisation requirement**

Certification as detailed in Subpart J of Part 2 is required for this device.

### **Section 15.203: Antenna requirement**

This device has internal antennas for the 125 kHz and 13.560 MHz transmitters.

**Result:** Complies.

### **Section 15.204: External radio frequency power amplifiers and antenna modifications**

It is not possible to attach an external power amplifier to this transmitter.

**Result:** Complies.

## Section 15.205: Restricted bands of operation


The transmitter transmits on 125.000 kHz.

This device would therefore fall between the restricted bands of 90 – 110 kHz and 495 – 505 kHz.

Measurements were made using a span of 10 kHz with a resolution bandwidth of 100 Hz and a video bandwidth of 300 Hz.

Measurements were made using a spectrum analyser with the 99% power points (-26 dB points) being determined.

At 125 kHz the modulation bandwidth was measured to be 1175 Hz.

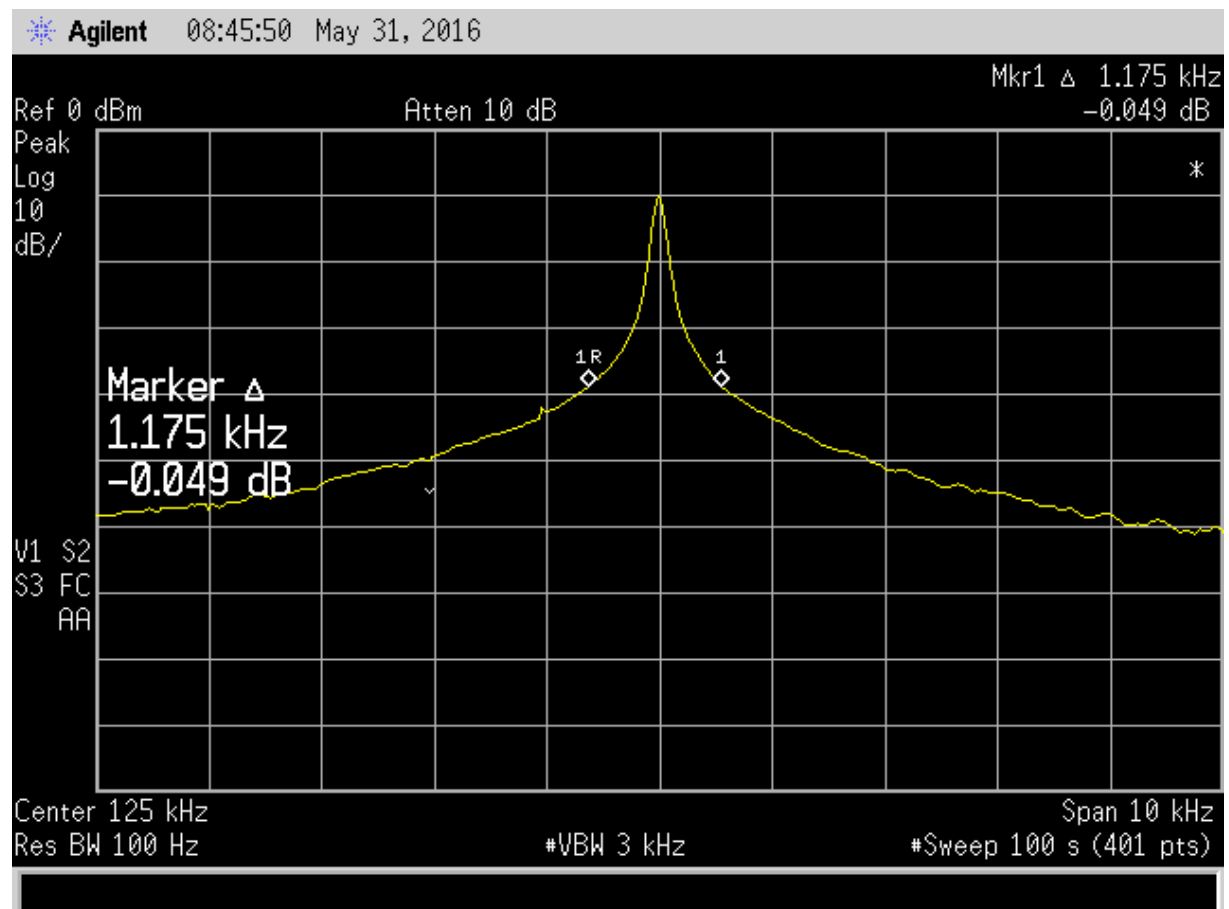

The transmitter transmits on 13.560 MHz.

This device would therefore fall into the band of 13.110 – 14.010 MHz that is covered by Section 15.225.


Measurements were made when the device was waiting on a card and when it was reading a card.

Measurements were made using a spectrum analyser with the 99% power points (-26 dB points) being determined.


Measurements were made using a span of 1.0 MHz with a resolution bandwidth of 10 kHz and a video bandwidth of 30 kHz.

A worst case modulation bandwidth of 445.000 kHz was measured.

### 13.560 MHz when reading a card

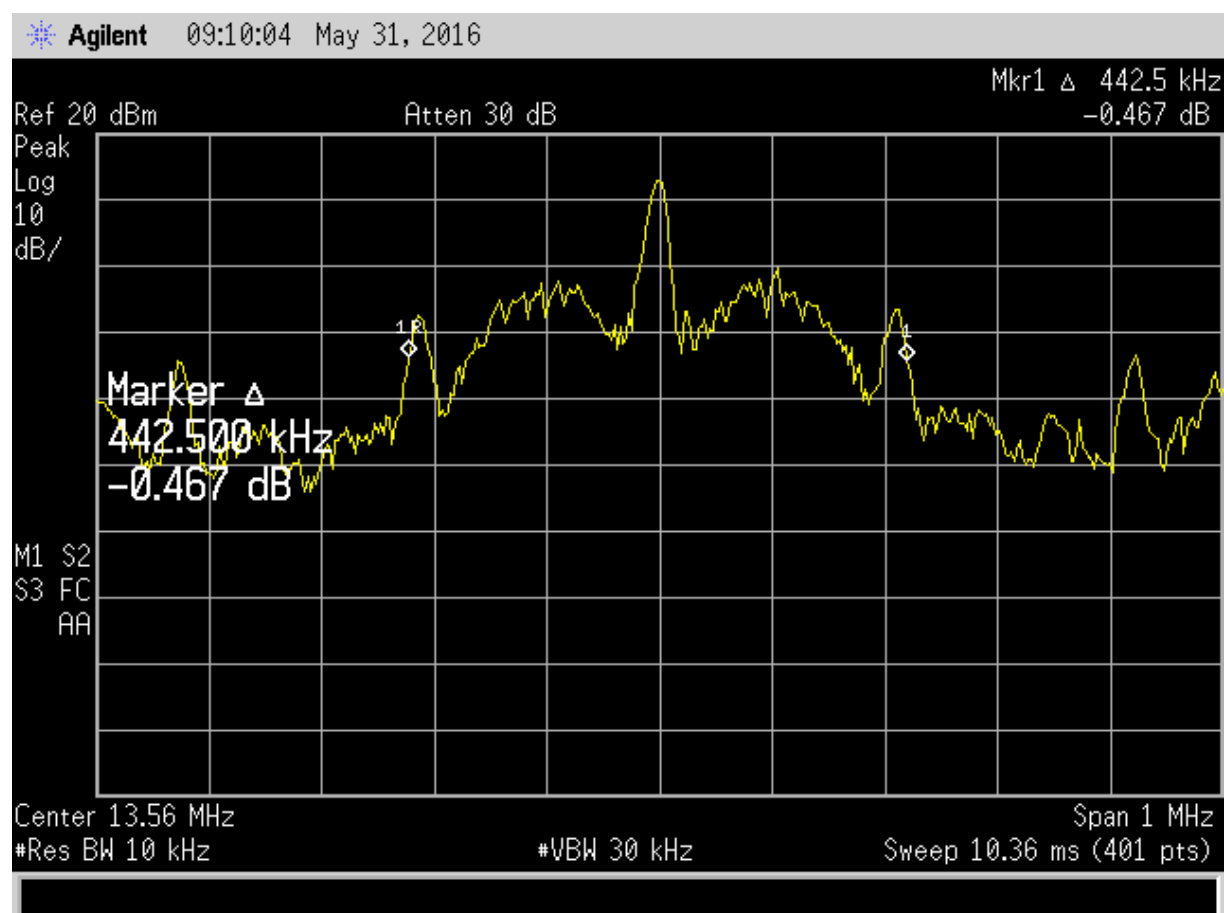

### 13.560 MHz when awaiting a card

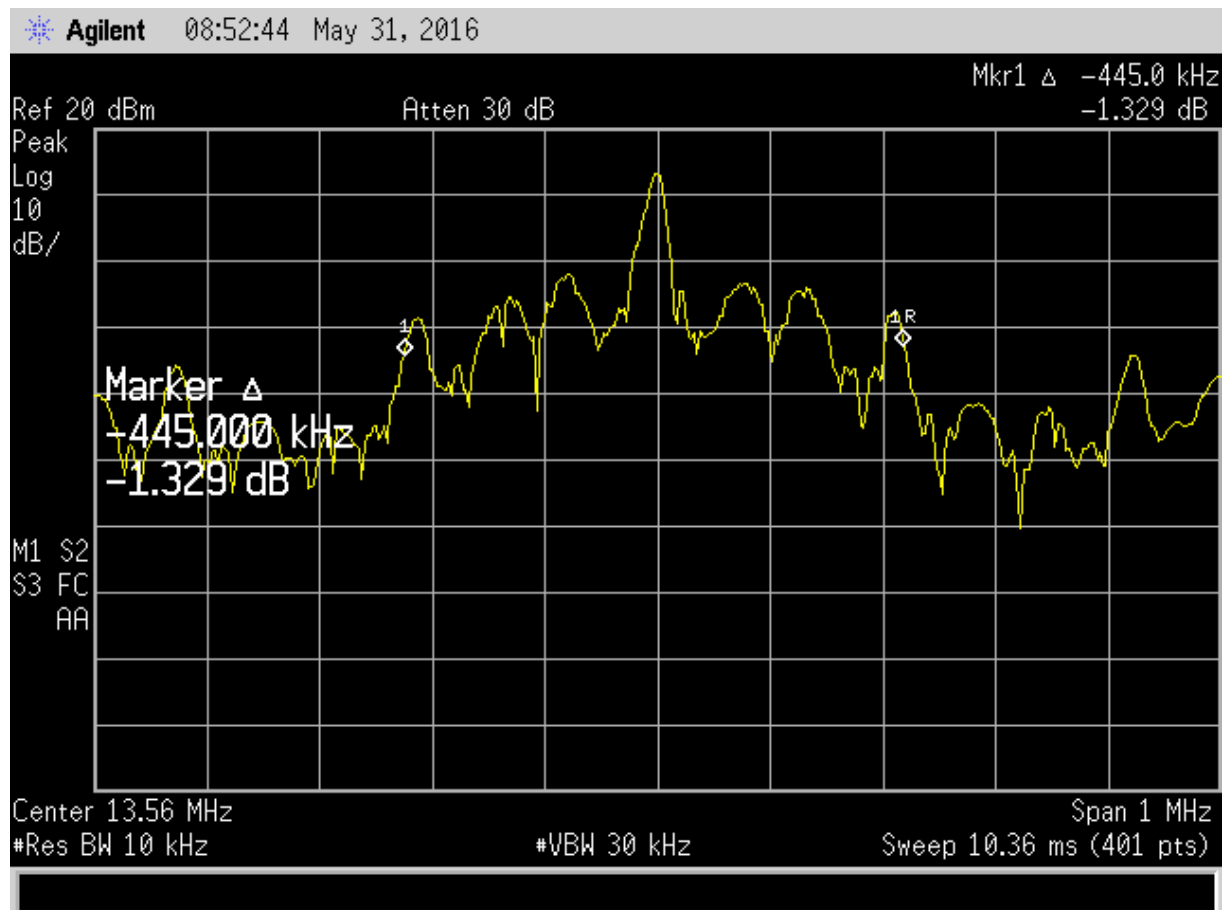

**Result:** Complies.

Technologies

Global Product Certification

## Section 15.207: Conducted emissions testing

Conducted Emissions testing was carried out over the frequency range of 150 kHz to 30 MHz which was carried out at the laboratory's MacKelvie Street premises in a 2.4 m x 2.4 m x 2.4 m screened room

Testing was carried out using a representative AC power supply system that was powered at 120 Vac 60 Hz which supplied 12 Vdc to a Gallagher Controller 6000 device which in turn powered the Card Reader at 12 Vdc.

The device operates on 125 kHz and 13.560 MHz.

Testing was carried out with both transmitters operating with their standard antennas attached and when the 13.560 MHz antenna was removed and replaced with a dummy load.

The device is deemed to comply providing it complies when the test is carried out with the dummy load attached and the overall emission signature for the product remains similar with no additional emissions being detected.

This is the case with this device.

The device was placed on top of the emissions table, which is 1 m x 1.5 m, 80 cm above the screened room floor which acts as the horizontal ground plane.

In addition the device was positioned 40 cm away from the screened room wall which acts as the vertical ground plane.

The artificial mains network was bonded to the screened room floor.

At all times the device was kept more than 80 cm from the artificial mains network.

The Class B limits have been applied.

The supplied plot is combined plot showing the worst case quasi peak and average results of both the phase and neutral lines to the representative AC power supply.

Quasi peak and average detectors have been used with resolution bandwidths of 9 kHz.


Measurement uncertainty with a confidence interval of 95% is:

- AC Mains port                       $(0.15\text{-}30 \text{ MHz}) \pm 2.8 \text{ dB}$

## Conducted Emissions – AC Input Power Port - Normal Operating Mode

**Setup:** Device tested when continuously reading a MiFare Access card when transmitting on 125 kHz and 13.560 MHz when powered at 120 Vac 60 Hz via an external power supply and control board.

Peak --- Average -- Quasi Peak X Average +

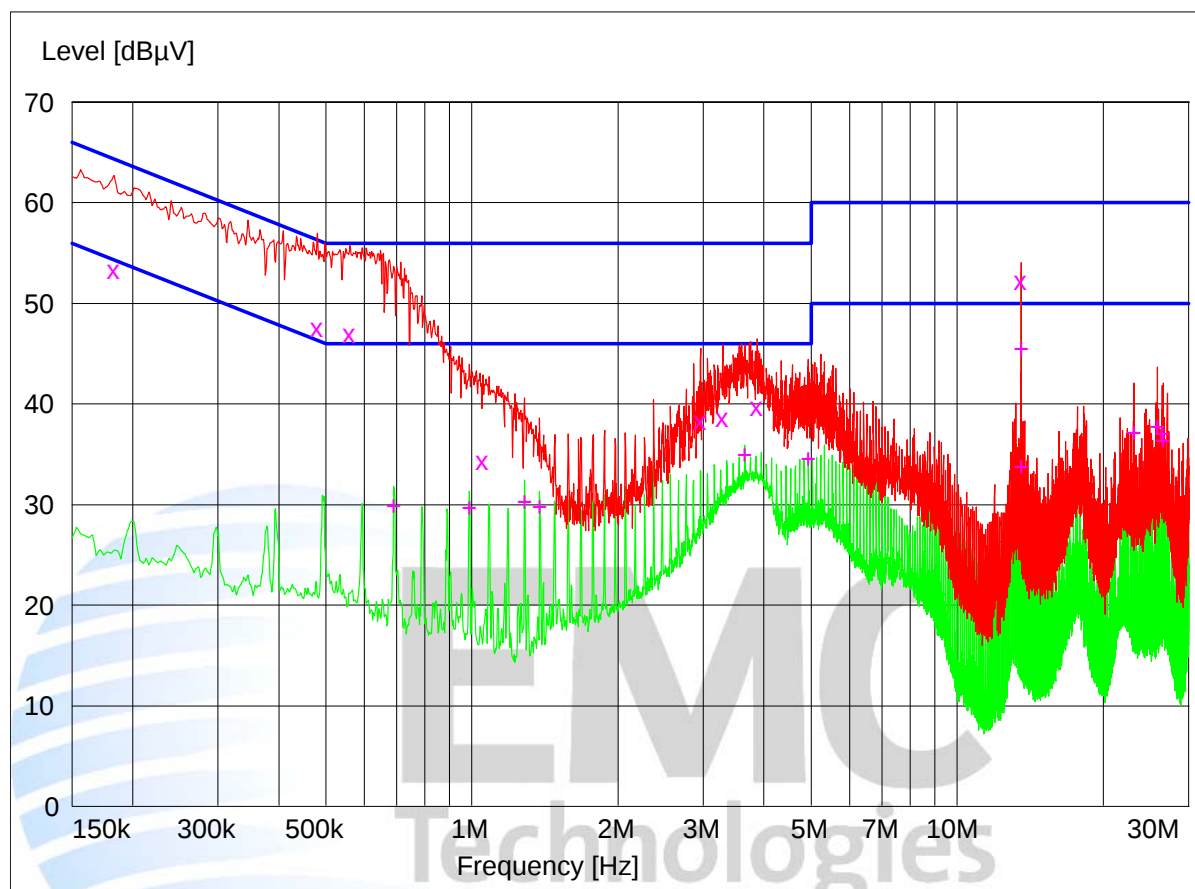

Final Quasi-Peak Measurements

| Frequency (MHz) | Level (dBμV) | Limit (dBμV) | Margin (dB) | Phase | Rechecks (dBμV) |
|-----------------|--------------|--------------|-------------|-------|-----------------|
| 0.183000        | 53.40        | 64.4         | 11.0        | L1    |                 |
| 0.480000        | 47.60        | 56.4         | 8.8         | L1    |                 |
| 0.561000        | 47.00        | 56.0         | 9.0         | L1    |                 |
| 1.056000        | 34.30        | 56.0         | 21.7        | L1    |                 |
| 2.963000        | 38.40        | 56.0         | 17.6        | N     |                 |
| 3.291500        | 38.60        | 56.0         | 17.4        | N     |                 |
| 3.876500        | 39.80        | 56.0         | 16.2        | N     |                 |
| 13.56000        | 55.10        | 60.0         | 4.9         | N     |                 |


Final Average Measurements

| Frequency (MHz) | Level (dBμV) | Limit (dBμV) | Margin (dB) | Phase | Rechecks (dBμV) |
|-----------------|--------------|--------------|-------------|-------|-----------------|
| 0.690000        | 29.90        | 46.0         | 16.1        | N     |                 |
| 0.987000        | 29.70        | 46.0         | 16.3        | N     |                 |
| 1.284000        | 30.30        | 46.0         | 15.7        | N     |                 |
| 1.380000        | 29.80        | 46.0         | 16.2        | N     |                 |
| 3.651500        | 35.00        | 46.0         | 11.0        | N     |                 |
| 4.934000        | 34.60        | 46.0         | 11.4        | N     |                 |
| 13.556000       | 45.50        | 50.0         | 4.5         | N     |                 |
| 13.560000       | 50.20        | 50.0         | -0.2        | L1    |                 |
| 23.127500       | 37.20        | 50.0         | 12.8        | L1    |                 |
| 25.872500       | 37.70        | 50.0         | 12.3        | N     |                 |
| 26.484500       | 37.00        | 50.0         | 13.0        | N     |                 |
| 26.547500       | 36.40        | 50.0         | 13.6        | N     |                 |

## Conducted Emissions – AC Input Power Port

**Setup:** Device tested when operating continuously when a resistive dummy load was attached to the 13.560 MHz transmitter when it was powered at 120 Vac 60 Hz via an external power supply and a control board.

Peak --- Average -- Quasi Peak X Average +

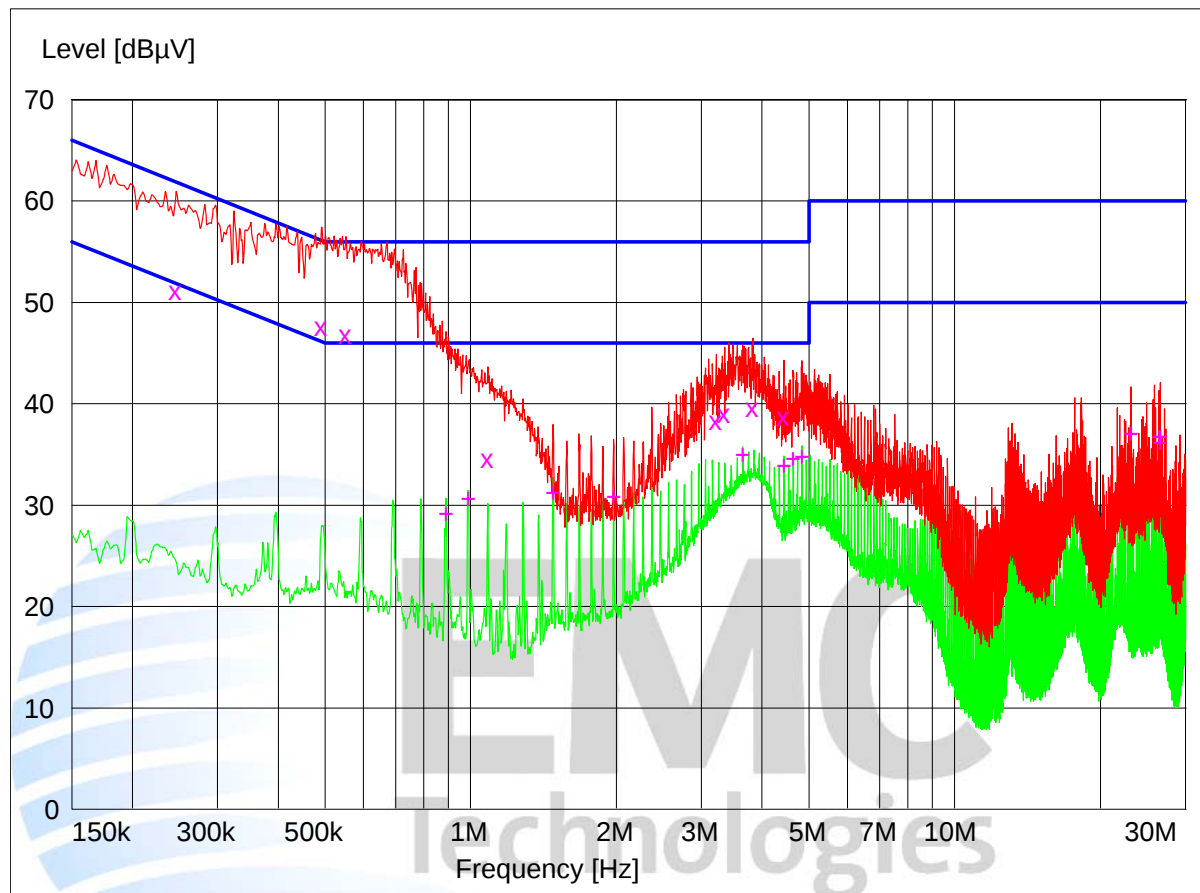

Final Quasi-Peak Measurements

| Frequency<br>MHz | Level<br>dBμV | Limit<br>dBμV | Margin<br>dB | Phase | Rechecks<br>dBμV |
|------------------|---------------|---------------|--------------|-------|------------------|
| 0.246000         | 51.20         | 61.9          | 10.7         | L1    |                  |
| 0.492000         | 47.60         | 56.1          | 8.5          | L1    |                  |
| 0.552000         | 46.80         | 56.0          | 9.2          | N     |                  |
| 1.086000         | 34.60         | 56.0          | 21.4         | N     |                  |
| 3.215000         | 38.30         | 56.0          | 17.7         | N     |                  |
| 3.345500         | 39.00         | 56.0          | 17.0         | N     |                  |
| 3.831500         | 39.60         | 56.0          | 16.4         | N     |                  |
| 4.439000         | 38.70         | 56.0          | 17.3         | N     |                  |

Final Average Measurements

| Frequency<br>MHz | Level<br>dBμV | Limit<br>dBμV | Margin<br>dB | Phase | Rechecks<br>dBμV |
|------------------|---------------|---------------|--------------|-------|------------------|
| 0.888000         | 29.20         | 46.0          | 16.8         | N     |                  |
| 0.987000         | 30.60         | 46.0          | 15.4         | N     |                  |
| 1.479000         | 31.20         | 46.0          | 14.8         | N     |                  |
| 1.974000         | 30.80         | 46.0          | 15.2         | N     |                  |
| 3.651500         | 35.00         | 46.0          | 11.0         | N     |                  |
| 4.439000         | 33.90         | 46.0          | 12.1         | N     |                  |
| 4.637000         | 34.60         | 46.0          | 11.4         | N     |                  |
| 4.835000         | 34.80         | 46.0          | 11.2         | N     |                  |
| 23.127500        | 37.10         | 50.0          | 12.9         | L1    |                  |
| 26.484500        | 36.80         | 50.0          | 13.2         | N     |                  |
| 26.547500        | 36.20         | 50.0          | 13.8         | N     |                  |
| 26.610500        | 36.80         | 50.0          | 13.2         | N     |                  |

## Section 15.209: Radiated emission limits, general requirements

Radiated emissions testing was carried out over the frequency range of 100 kHz to 1000 MHz as the highest frequency in use has been stated to be less than 108 MHz (27.120 MHz).

Testing was carried out at the laboratory's open area test site - located at Driving Creek, Orere Point, Auckland, New Zealand.

An enclosure containing absorber material, Panashield HYB-NF-12, has been placed between the turntable and the measurement antenna for when measurements are made above 1 GHz.

This material has no absorbing affect below 1 GHz with site verification measurements confirming this.

Testing was carried out using a representative AC power supply system that was powered at 120 Vac 60 Hz which supplied 12 Vdc to a Controller 6000 device which in turn powered the Card Reader also at 12 Vdc.

The Controller 6000 and representative AC power supply were placed 5 metres directly behind the device under test (in the coffin).

Testing was carried out with the device being placed in the centre of the test table standing vertically upright using a test jig.

The device was transmitting continuously on 125 kHz and 13.560 MHz.

Correct operation was confirmed periodically by placing a suitable card in front of the device which would give an audible beep.

When an emission is located, it is positively identified and its maximum level is found by rotating the automated turntable, and by varying the antenna height, where appropriate, with an automated antenna tower.

Below 30 MHz a magnetic loop is used with the centre of the loop being 1 metre above the ground with measurements being made using a quasi peak detector.

Above 30 MHz the emission is measured in both vertical and horizontal antenna polarisations, where appropriate, using a quasi peak detector.

The emission level was determined in field strength by taking the following into consideration:

Level (dB $\mu$ V/m) = Receiver Reading (dB $\mu$ V) + Antenna Factor (dB/m) + Coax Loss (dB)

**Result:** Complies

Measurement uncertainty with a confidence interval of 95% is:

- Free radiation tests (30 – 1000 MHz)  $\pm$  4.1 dB
- Free radiation tests (100 kHz – 30 MHz)  $\pm$  4.8 dB

### Section 15.209: 125 kHz Fundamental emission:

Measurements were made using a magnetic loop antenna and a receiver with an average detector and a peak detector both using a 9 kHz bandwidth

| Frequency (kHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Distance (metres) |
|-----------------|----------------|----------------|-------------|----------|-------------------|
| 125.000         | 50.0           | 84.7           | 29.7        | Average  | 10                |
| 125.000         | 55.0           | 104.7          | 36.6        | Peak     | 10                |

Measurements were made at a distance of 10 metres with the limit being determined by using the extrapolation factor of 40 dB per decade limit as detailed in section 15.31 f (2).

The 300 metre limit between 125 – 490 kHz has been scaled by a factor of 40 dB per decade, as per section 15.31 (f) (2).

The average limit at 300 m at 125.0 kHz is 19.2 uV/m or 25.7 dBuV/m and 45.7 dBuV/m in peak.

$$\begin{aligned} &= 25.7 \text{ dBuV/m} + -40 \text{ dB/decade} * (\log(10) - \log(300)) \\ &= 25.7 \text{ dBuV/m} + -40 \text{ dB/decade} * (1.000 - 2.477) \\ &= 25.7 \text{ dBuV/m} + -40 \text{ dB/decade} * -1.477 \\ &= 25.7 \text{ dBuV/m} + 59.08 \\ &= 84.7 \text{ dBuV/m} \end{aligned}$$

This gives a limit at 10 m at 134.2 kHz of 84.7 dBuV/m and 104.7 dBuV/m in peak

Testing was also carried out to determine whether a variation in the supply voltage would cause a significant change in the peak field strength.

As a worst case indication the 12 Vdc supply to the card reader was varied by +/- 15% between 10.2 Vdc and 13.8 Vdc.

| Voltage (Vdc) | Peak Field Strength (dBuV/m) |
|---------------|------------------------------|
| 10.2          | 55.0                         |
| 12.0          | 55.0                         |
| 13.8          | 55.0                         |

**Result:** Complies.

Measurement uncertainty with a confidence interval of 95% is:

- Free radiation tests (100 kHz – 30 MHz)  $\pm 4.8$  dB

## Section 15.209: 125 kHz Spurious Emissions (below 30 MHz)

A receiver with an average detector and a peak detector using a 9 kHz bandwidth was used between 110 – 490 kHz and a quasi peak detector with a 9 kHz bandwidth was used between 490 kHz – 30.0 MHz.

| Frequency (kHz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector   | Comment     |
|-----------------|----------------|----------------|-------------|------------|-------------|
| 250.000         | 44.0           | 78.7           | -           | Average    | Noise Floor |
| 250.000         | 54.0           | 98.7           | -           | Peak       | Noise Floor |
| 375.000         | 46.0           | 75.2           | -           | Average    | Noise Floor |
| 375.000         | 56.0           | 95.2           | -           | Peak       | Noise Floor |
| 500.000         | 43.0           | 52.7           | -           | Quasi Peak | Noise Floor |
| 625.000         | 40.0           | 50.8           | -           | Quasi Peak | Ambient     |
| 750.000         | 34.0           | 49.2           | -           | Quasi Peak | Noise Floor |
| 875.000         | 33.0           | 47.8           | -           | Quasi Peak | Ambient     |
| 1000.000        | 30.0           | 46.7           | -           | Quasi Peak | Noise Floor |
| 1125.000        | 32.0           | 45.7           | -           | Quasi Peak | Noise Floor |
| 1250.000        | 35.0           | 44.7           | -           | Quasi Peak | Ambient     |
| 1375.000        | 26.0           | 43.9           | -           | Quasi Peak | Noise Floor |
| 1500.000        | 28.0           | 43.2           | -           | Quasi Peak | Noise Floor |
| 1625.000        | 24.0           | 42.5           | -           | Quasi Peak | Noise Floor |
| 1750.000        | 24.0           | 48.6           | -           | Quasi Peak | Noise Floor |
| 1875.000        | 22.0           | 48.6           | -           | Quasi Peak | Noise Floor |

Magnetic loop measurements were made a distance of 10 metres with the measurement antenna being further adjusted to give the highest field strength.

The 300 metre limit between 125 – 490 kHz has been scaled by a factor of 40 dB per decade, as per section 15.31 (f) (2).

$$\begin{aligned} &= \text{Limit (dBuV/m)} + -40 \text{ dB/decade} * (\log(10) - \log(300)) \\ &= \text{Limit (dBuV/m)} + -40 \text{ dB/decade} * (1.000 - 2.477) \\ &= \text{Limit (dBuV/m)} + -40 \text{ dB/decade} * -1.477 \\ &= \text{Limit (dBuV/m)} + 59.08 \end{aligned}$$

The limit between 110 – 490 kHz was increased by 20 dB when the peak detector was used.

The 30 metre limit between 490 – 1705 kHz has been scaled by a factor of 40 dB per decade, as per section 15.31 (f) (2).

$$\begin{aligned} &= \text{Limit (dBuV/m)} + -40 \text{ dB/decade} * (\log(10) - \log(30)) \\ &= \text{Limit (dBuV/m)} + -40 \text{ dB/decade} * (1.000 - 1.477) \\ &= \text{Limit (dBuV/m)} + -40 \text{ dB/decade} * -0.477 \\ &= \text{Limit (dBuV/m)} + 19.08 \end{aligned}$$

The spurious emissions observed do not exceed the level of the fundamental emission.

**Result:** Complies.

Measurement uncertainty with a confidence interval of 95% is:

- Free radiation tests (100 kHz – 30 MHz)  $\pm$  4.8 dB

## Section 15.209: 13.560 MHz transmitter below 30 MHz spurious emission measurements

| Frequency<br>(MHz) | Level<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
|--------------------|-------------------------|-------------------------|----------------|
| 27.120             | 22.3                    | 48.6                    | 26.3           |

Testing was carried out when the device was transmitting continuously.

Magnetic loop measurements were attempted at a distance of 10 metres.

A receiver with a quasi peak detector with a 9 kHz bandwidth was used between 490 kHz – 30.0 MHz.

The 30 metre limit between 1.705 MHz – 30 MHz has been scaled by a factor of 40 dB per decade, as per section 15.31 (f) (2).

The limit at 27.122 MHz when measured at 30 metres is 30  $\mu$ V/m or 29.54 dB $\mu$ V/m.

Therefore when scaled the limit at 10 metres will be 48.6 dB $\mu$ V/m as detailed below.

$$= 29.54 \text{ dB}\mu\text{V/m} + -40 \text{ dB/decade} * (\log(10) - \log(30))$$

$$= 29.54 \text{ dB}\mu\text{V/m} + -40 \text{ dB/decade} * (1.000 - 1.477)$$

$$= 29.54 \text{ dB}\mu\text{V/m} + -40 \text{ dB/decade} * -0.477$$

$$= 29.54 \text{ dB}\mu\text{V/m} + 19.08$$

$$= 48.6 \text{ dB}\mu\text{V/m}$$

The spurious emission observed does not exceed the level of the fundamental emission

**Result:** Complies.

Measurement uncertainty with a confidence interval of 95% is:

- Free radiation tests (100 kHz – 30 MHz)  $\pm 4.8$  dB

## Section 15.209: Spurious Emissions (above 30 MHz)

Measurements between 30 – 2000 MHz have been made at a distance of 3 metres.

A receiver with a quasi peak detector with a 120 kHz bandwidth was used between 30 – 1000 MHz and with a peak and average detector with a 1 MHz bandwidth was used between 1000 – 2000 MHz.

The limits as described in Section 15.209 have been applied.

### Harmonics

| Frequency (MHz) | Vertical (dB $\mu$ V/m) | Horizontal (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Antenna Pol. | Detector | BW (kHz) |
|-----------------|-------------------------|---------------------------|----------------------|-------------|--------------|----------|----------|
| 40.680          | 37.4                    | 19.1                      | 40.0                 | 2.6         | Vertical     | QP       | 120      |
| 54.240          | 16.1                    | -                         | 40.0                 | 23.9        | Vertical     | QP       | 120      |
| 67.800          | 22.0                    | -                         | 40.0                 | 18.0        | Vertical     | QP       | 120      |

### Other emissions

| Frequency (MHz) | Vertical (dB $\mu$ V/m) | Horizontal (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Antenna Pol. | Detector | BW (kHz) |
|-----------------|-------------------------|---------------------------|----------------------|-------------|--------------|----------|----------|
| 351.000         | 27.1                    | -                         | 46.0                 | 18.9        | Vertical     | QP       | 120      |
| 366.000         | -                       | 26.8                      | 46.0                 | 19.2        | Vertical     | QP       | 120      |
| 384.000         | 22.9                    | -                         | 46.0                 | 18.0        | Vertical     | QP       | 120      |

All other emissions observed had a margin to the limit that exceeded 15 dB when measurements were attempted over the range of 30 – 2000 MHz using both vertical and horizontal polarisations.

**Result:** Complies.

Measurement uncertainty with a confidence interval of 95% is:

- Free radiation tests (30 MHz – 2000 MHz)  $\pm$  4.1 dB

### Section 15.225: Fundamental emission:

Measurements were made using a magnetic loop antenna and a receiver with a quasi peak detector using a 9 kHz bandwidth

Measurements were made at a distance of 10 metres with the limit being determined by using the extrapolation factor of 40 dB per decade limit, as detailed in section 15.31 f (2).

The limit at 30 m at 13.560 MHz is 15,848 uV/m or 84.0 dBuV/m.

Applying the extrapolation factor of 40 dB/ per decade, the limit is 103.1 dBuV/m.

$$\begin{aligned} &= 84.0 \text{ dBuV/m} + -40 \text{ dB/decade} * (\log(10) - \log(30)) \\ &= 84.0 \text{ dBuV/m} + 19.08 \\ &= 103.1 \text{ dBuV/m} \end{aligned}$$

As a worst case testing was also carried out when the device was transmitting continuously when the 12.0 Vdc supply to the device was varied by +/- 15%.

| Frequency (MHz) | Level (dBuV/m) | Distance (metres) | Limit (dBuV/m) | Voltage (Vdc) | Margin (dB) |
|-----------------|----------------|-------------------|----------------|---------------|-------------|
| 13.560          | 52.9           | 10.0              | 103.1          | 10.2          | 50.2        |
| 13.560          | 52.9           | 10.0              | 103.1          | 12.0          | 50.2        |
| 13.560          | 53.0           | 10.0              | 103.1          | 13.8          | 50.1        |


A representative spectrum analyser plot shows that the carrier and modulation peaks within, +/- 1 MHz and +/- 5 MHz of the carrier.

**Result:** Complies.


Measurement uncertainty with a confidence interval of 95% is:

- Free radiation tests (100 kHz – 30 MHz)  $\pm$  4.8 dB


# Reading a card with a 1 MHz span

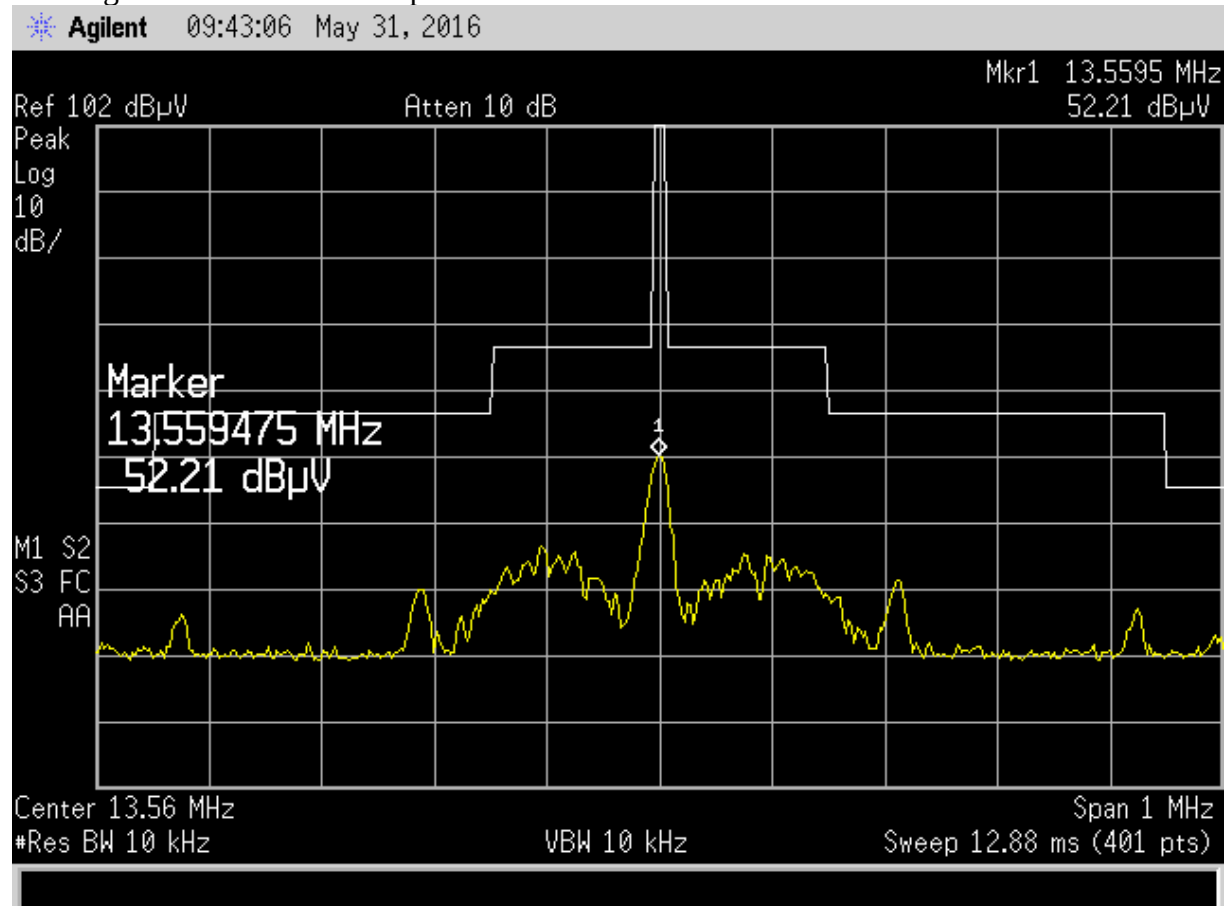


# Reading a card with a 5 MHz span

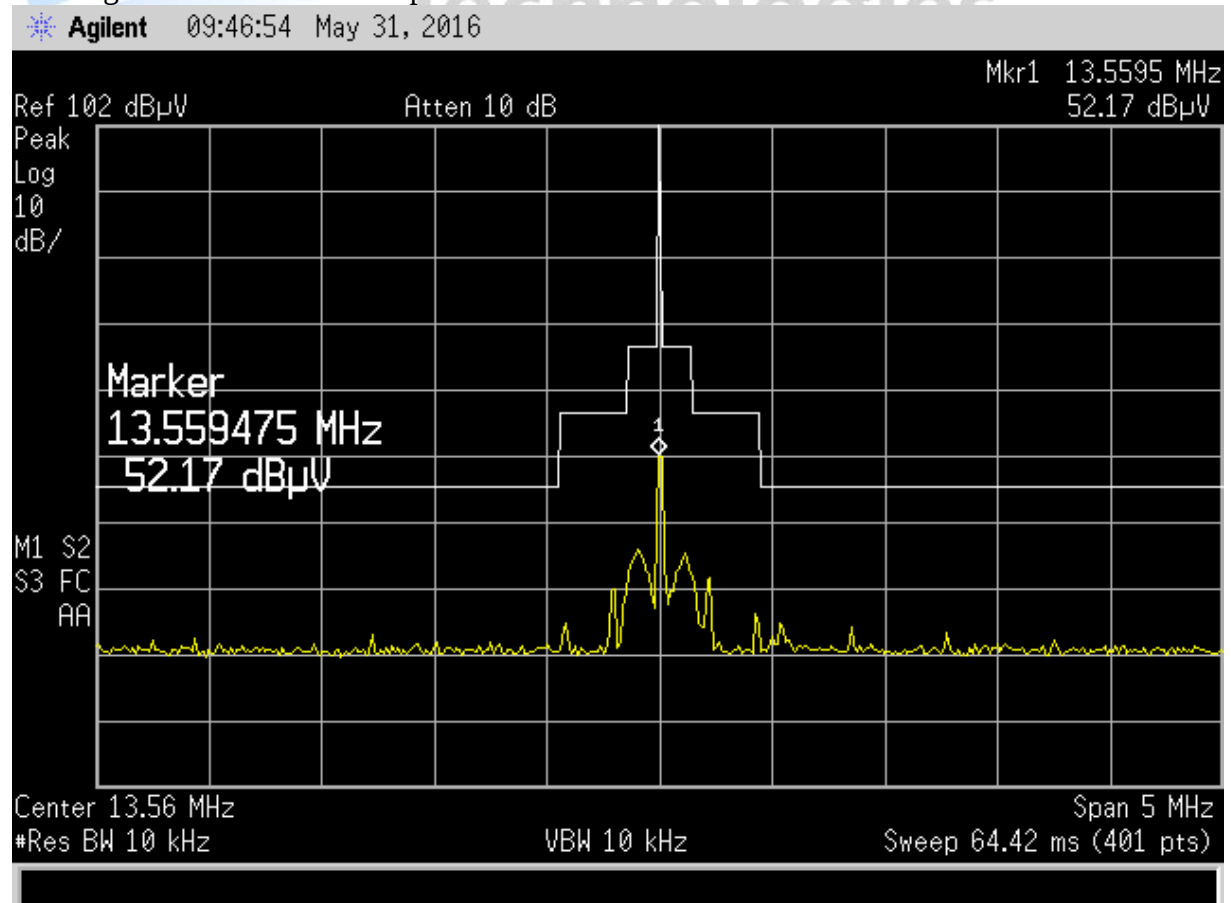

Awaiting a card with a 1 MHz span

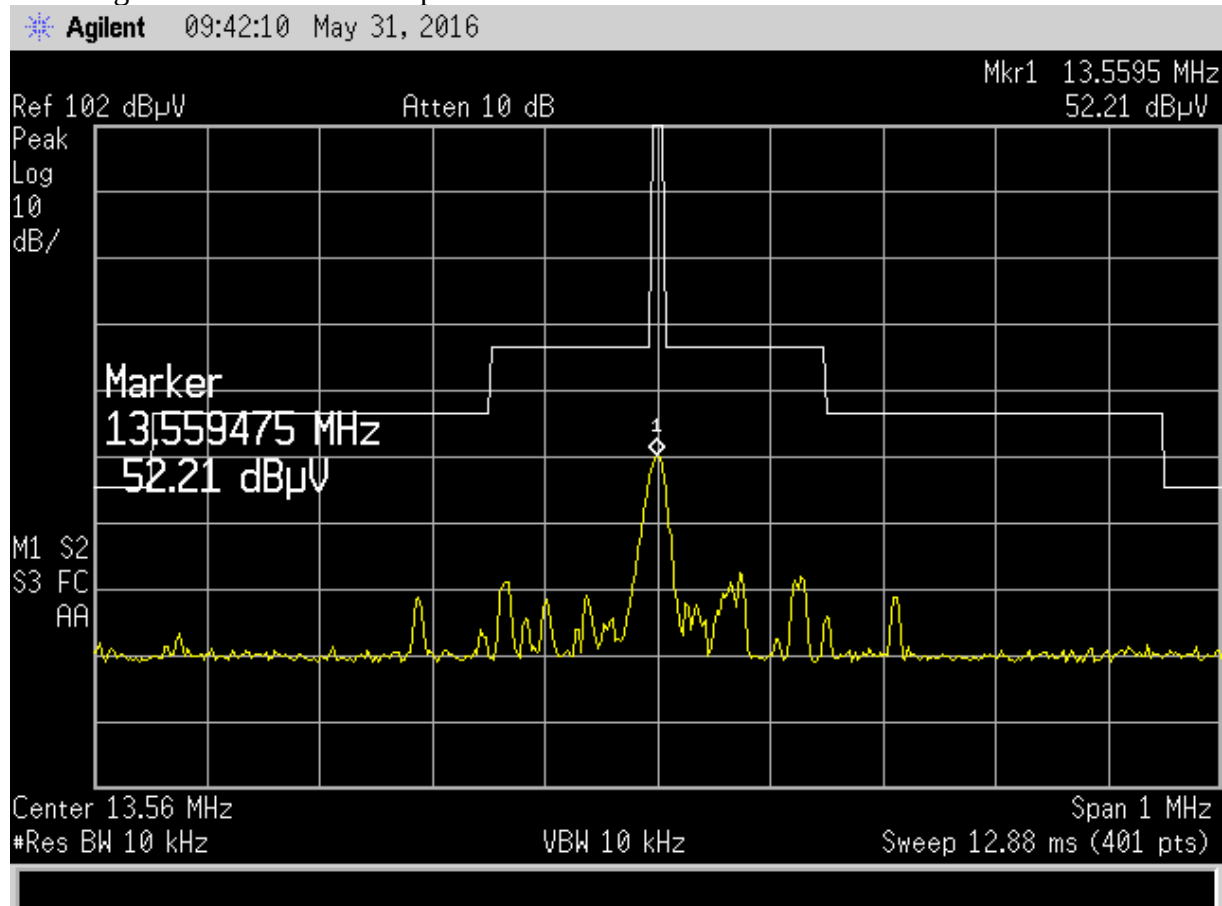

Awaiting a card with a 5 MHz span

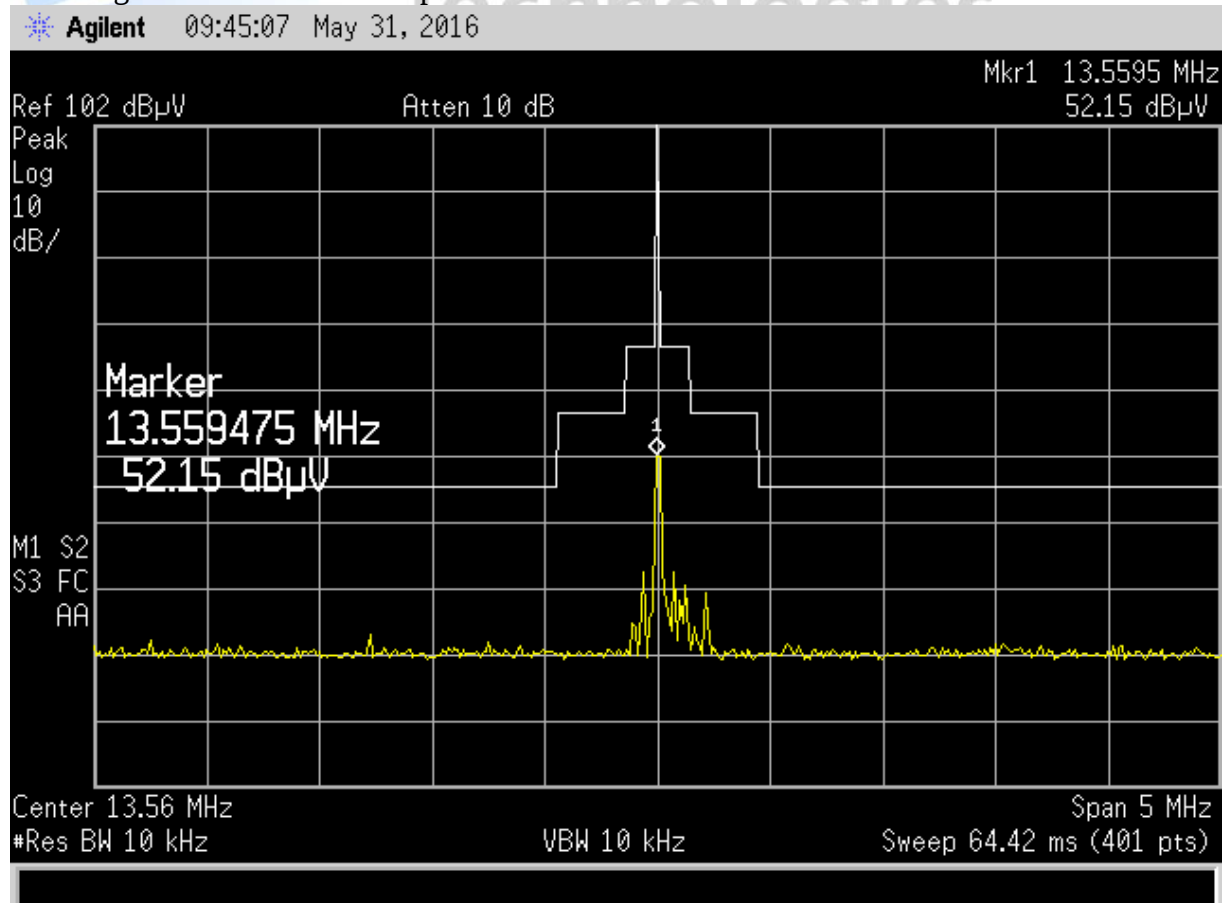

### Section 15.225: Frequency tolerance:

The frequency tolerance of the carrier is required to be +/- 0.01% of operating frequency when the temperature is varied between -20 degrees and +50 degrees.

The device operates nominally on 13.560 MHz which gives a frequency tolerance of +/- 1,356 Hz.

| Temperature (°C) | Frequency (MHz) | Difference (Hz) |
|------------------|-----------------|-----------------|
| -20.0            | 13.559 525      | -475            |
| -10.0            | 13.559 530      | -470            |
| 0.0              | 13.559 520      | -480            |
| 10.0             | 13.559 490      | -510            |
| 20.0             | 13.559 462      | -538            |
| 30.0             | 13.559 455      | -545            |
| 40.0             | 13.559 435      | -565            |
| 50.0             | 13.559 405      | -595            |

Variation of the 120 Vac 60 Hz supply to the AC power supply did not vary the 12 Vdc supply to the Controller 6000 or the device under test.

As a worst case scenario the 12 Vdc supply to the device was varied between 85% and 115% of the supply voltage at +20 degrees.

| Voltage (Vdc) | Frequency (MHz) | Difference (Hz) |
|---------------|-----------------|-----------------|
| 10.2          | 13.559 462      | -538            |
| 12.0          | 13.559 462      | -538            |
| 13.8          | 13.559 462      | -538            |

**Result:** Complies

Measurement uncertainty with a confidence interval of 95% is:

- Frequency tolerance  $\pm 50$  Hz

## 7. TEST EQUIPMENT USED

| Instrument        | Manufacturer | Model      | Serial No  | Asset Ref | Period  | Cal Due        |
|-------------------|--------------|------------|------------|-----------|---------|----------------|
| AC Supply         | APT          | 7008       | 4170003    | -         | -       | Not applicable |
| Aerial Controller | EMCO         | 1090       | 9112-1062  | RFS 3710  | -       | Not applicable |
| Aerial Mast       | EMCO         | 1070-1     | 9203-1661  | RFS 3708  | -       | Not applicable |
| Biconical         | Schwarzbeck  | BBA 9106   | -          | RFS 3612  | 3 years | 5 Feb 2017     |
| Log Periodic      | Schwarzbeck  | VUSLP 9111 | 9111-228   | 3785      | 3 years | 5 Feb 2017     |
| Loop Antenna      | EMCO         | 6502       | 9003-2485  | 3798      | 3 years | 7 Jul 2017     |
| Mains Network     | R & S        | ESH2-Z5    | 881362/032 | 3628      | 2 years | 2 Oct 2016     |
| Receiver          | R & S        | ESHS 10    | 828404/005 | 3728      | 1 year  | 27 June 2016   |
| Receiver          | R & S        | ESIB-40    | 100171     | R-27-1    | 1 year  | 15 Feb 2017    |
| Turntable         | EMCO         | 1080-1-2.1 | 9109-1578  | RFS 3709  | -       | Not applicable |
| VHF Balun         | Schwarzbeck  | VHA 9103   | -          | RFS 3603  | 3 years | 5 Feb 2017     |

## 8. ACCREDITATIONS

Testing was carried out in accordance with EMC Technologies Ltd registration with the Federal Communications Commission as a listed facility, registration number: 90838, which was updated in June 2014.

All testing was carried out in accordance with the terms of EMC Technologies (NZ) Ltd International Accreditation New Zealand (IANZ) Accreditation to NZS/ISO/IEC 17025.

All measurement equipment has been calibrated in accordance with the terms of the EMC Technologies (NZ) Ltd International Accreditation New Zealand (IANZ) Accreditation to NZS/ISO/IEC 17025.


International Accreditation New Zealand has Mutual Recognition Arrangements for testing and calibration with various accreditation bodies in a number of economies. This includes NATA (Australia), UKAS (UK), SANAS (South Africa), NVLAP (USA), A2LA (USA), SWEDAC (Sweden). Further details can be supplied on request.

## 9. PHOTOGRAPHS

External Photos



## Conducted emissions test set up

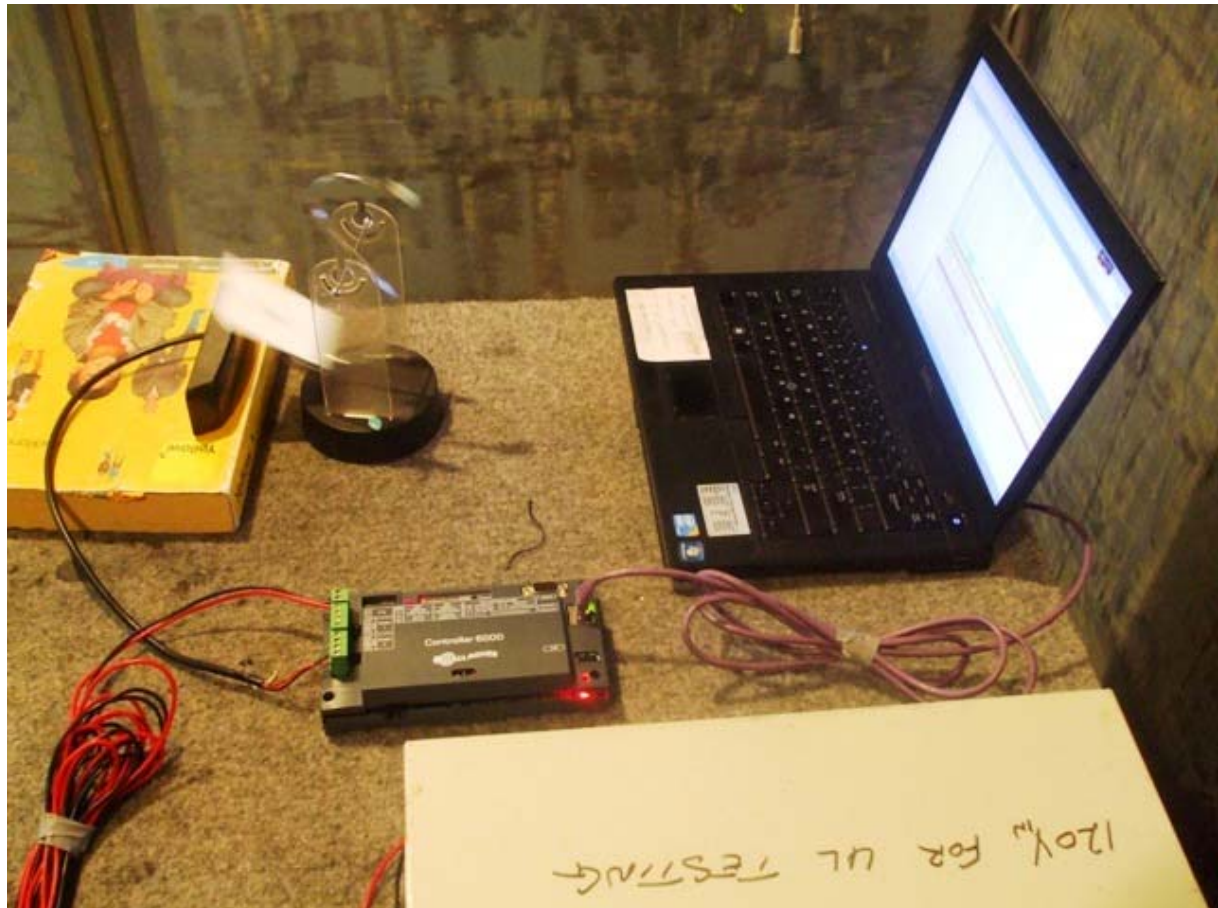




**EMC**  
**Technologies**


Global Product Certification

## Radiated emissions test set up

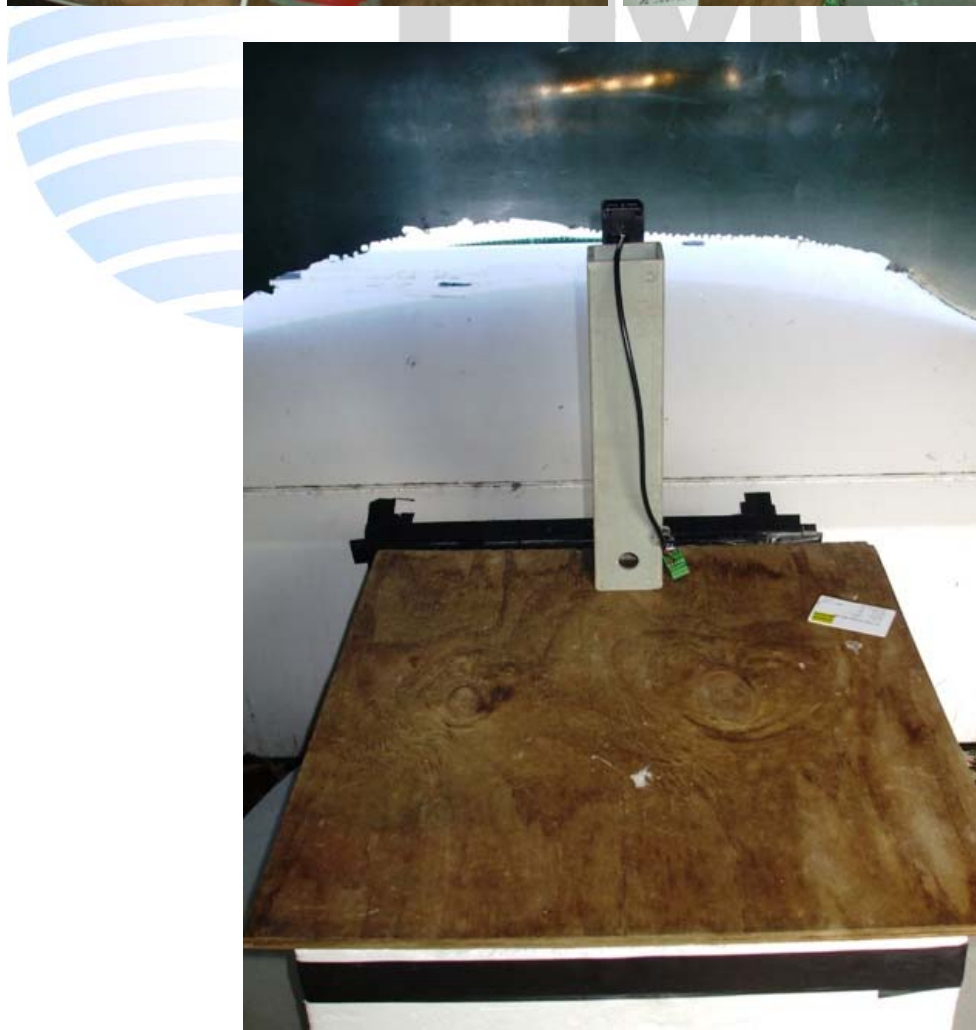



## Ancillary equipment test set up

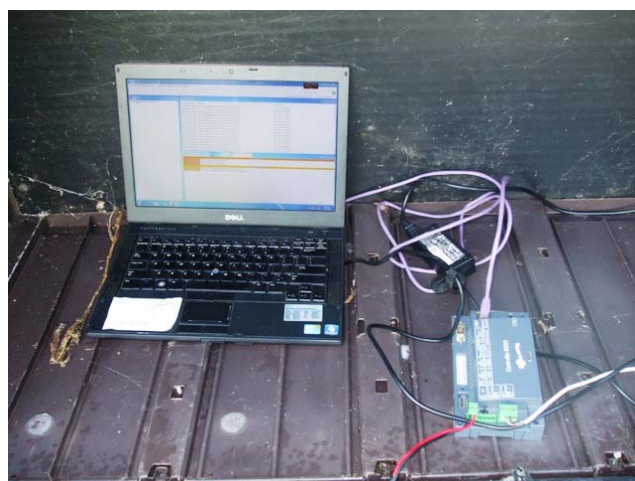

## Test Site Description





EMCO Loop antenna (9 kHz - 30 MHz)



## Biconnical Antenna (30 - 300 MHz)



## Schwarzbeck Log Periodic Antenna (300 - 2000 MHz)

