




## Quick Guide



**ACT-58TW**  
**5 GHz Digital**  
**Bodypack Transmitter**



**ACT-33TW**  
**UHF Analog**  
**Bodypack Transmitter**



User Guide Download



### MIPRO ELECTRONICS CO., LTD.

Headquarters: No. 814, Beigang Rd., Chiayi City 600079, Taiwan  
Tel : +886-5-238-0809 Fax : +886-5-238-0803  
www.mipro.com.tw mipro@mipro.com.tw




2CE689C

All rights reserved. Do not copy or forward without prior approvals of MIPRO.  
Specifications and design subject to change without notice. YM 025/12

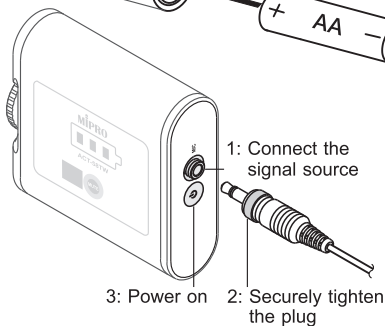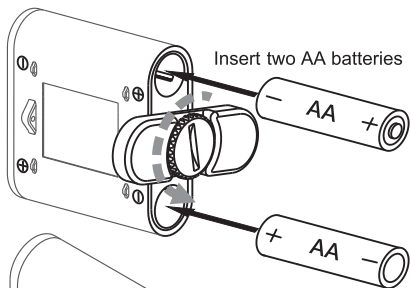

This product is designed according to waterproof standards but must be used in compliance with the following instructions.

- Properly tighten the thumb screw fastener to secure the battery cover and the main chassis.
- Please use the genuine MIPRO MU-57 Series waterproof microphones.

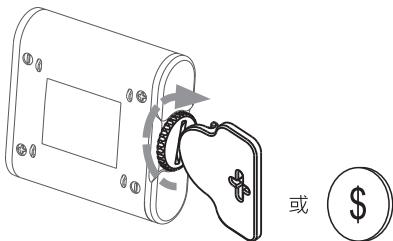

# Notes

- Commercially available batteries are intolerant of heat and can become more susceptible to leakage when placed or used under higher temperatures. Please remove the batteries when the product will not be used for a long time.
- This product is rated IP67. However, it will lose its waterproof properties when submerged in any type of solvent.
- Please refer to the actual product in the event of product description discrepancy.
- The frequency range and maximum deviation comply with the regulations of different countries.
- Spraying alcohol directly onto the condenser capsule module will cause severe damage and invalidate the warranty.
- Scan the QR Code to download the user guide for detailed instructions.



Dispose of any unusable devices or batteries responsibly and in accordance with any applicable regulations.

Disposing of used batteries with domestic waste is to be avoided!



Batteries / NiCad cells often contain heavy metals such as cadmium(Cd), mercury(Hg) and lead(Pb) that makes them unsuitable for disposal with domestic waste. You may return spent batteries/ accumulators free of charge to recycling centres or anywhere else batteries/accumulators are sold.



By doing so, you contribute to the conservation of our environment!

## FCC Radiation Exposure Statement (MPE) (ACT-33TW)

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 0.5 centimeters between the radiator and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The antennas used for this transmitter must be installed to provide a separation distance of at least 0.5 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

## Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**FCC Caution:** To assure continued compliance, any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. (Example - use only shielded interface cables when connecting to computer or peripheral devices).

## FCC Radiation Exposure Statement

### RF Exposure Information (SAR)

This device meets the government's requirements for exposure to radio waves. This device is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission of the U.S. Government.

The exposure standard for wireless devices employing a unit of measurement is known as the Specific Absorption Rate, or SAR. The SAR limit set by the FCC is 1.6W/kg.

The FCC has granted an Equipment Authorization for this device with all reported SAR levels evaluated as in compliance with the FCC RF exposure guidelines. SAR information on this device is on file with the FCC and can be found under the Display Grant section of [www.fcc.gov/oet/ea/fccid](http://www.fcc.gov/oet/ea/fccid) after searching on FCC ID: M5X-ACT58TW

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

## CE

**Caution:** risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries according to the instructions.

Please add operating frequency bands and the maximum RF power (Target power) transmitted in each band.

Hereby, [Name of the manufacturer] declares that the radio equipment type [designation of type of radio of equipment] is in compliance with Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at the following internet address: [www.address.com/DoC.pdf](http://www.address.com/DoC.pdf)

### RF Exposure Information (MPE)

This device meets the EU requirements and the International Commission on Non-Ionizing Radiation Protection (ICNIRP) on the limitation of exposure of the general public to electromagnetic fields by way of health protection. To comply with the RF exposure requirements, this equipment must be operated in a minimum of 20 cm separation distance to the user.