

# Point Six , Inc.

391 Codell Drive  
Lexington, Ky. 40509  
606-266-3606 Fax 271-0702

To Whom It May Concern:

The Point Six, Inc. wireless IR Counter transmitter (model Point Sensor IR Counter) transmits a 14-16 millisecond packet once each 600-10 seconds. This is identical to the data packet timing of a previously certified "M5ZWOW".

The packet consists of transmitter-on/transmitter-off timing that represents the serial number and counter data. The duty cycle is approximately 50%. The packet time can vary with serial number between 14-16 milliseconds. The packet data is controlled by a microprocessor whose timing is based on a ceramic resonator that is very stable. The packet below (figure #2) illustrates a typical data packet, the worst case, 16 milliseconds, cannot be shown because serial number would have to be forced to make this so. Figure #1 illustrates the overall timing; a packet is sent each 10 seconds in this worst case.

The batteries used during the tests were new and were standard 3.6 Volt Lithium cells. The batteries are a 3.6 Volt Lithium chemistry, which have a flat discharge curve from new to about 90% used. In this application the batteries require about 8 years to discharge to the point that they cannot be used. The batteries were used for no other purpose and had operated in the test unit for only a short time when the test was performed.

The label will be Flexcon 2 mil PM200S mylar with a Flexcon 1 mil PM100C Polyester laminate.

John I. Compton  
President, Point Six, inc.

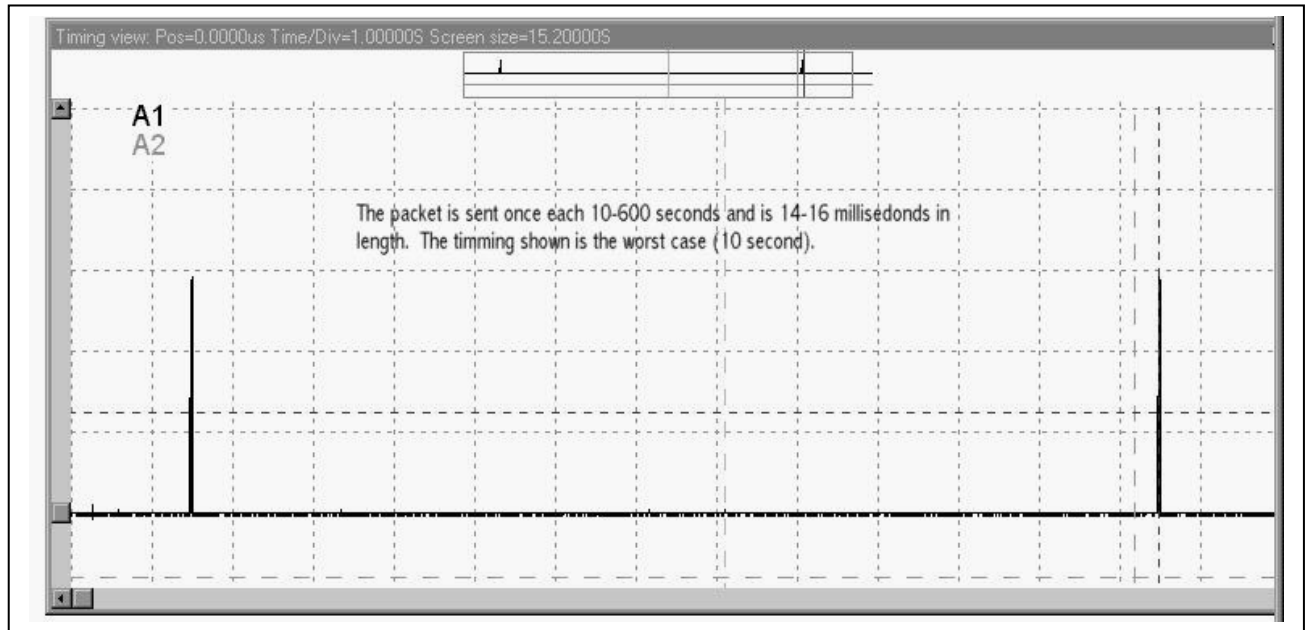


Figure #1 Overall timing

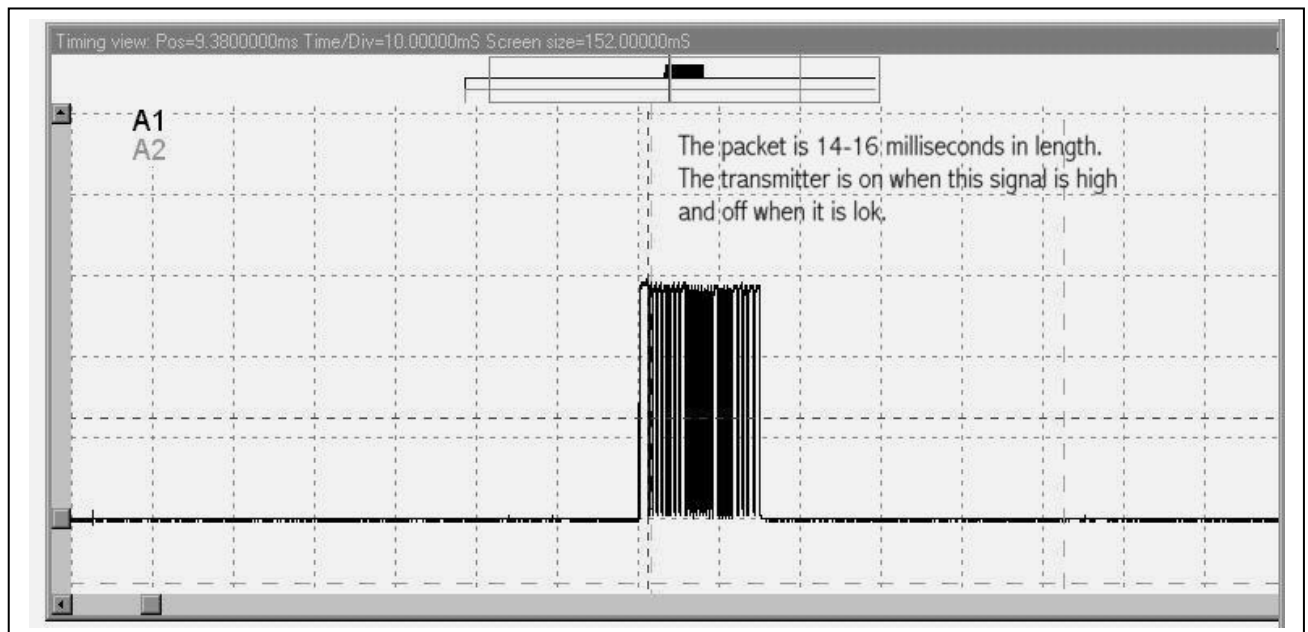


Figure #2 Packet Timing