



HEADQUARTERS: 914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230 • PHONE (410) 354-3300 • FAX (410) 354-3313

January 27, 2023

HP Inc.  
Tony Griffiths  
1501 Page Mill Road  
Palo Alto, CA94304

Dear Tony Griffiths,

Enclosed is the EMC Wireless test report for compliance testing of the HP, Inc. P033 as tested to the requirements of FCC Part 15 C and RSS-247 Issue 2 for Intentional Radiators.

Thank you for using the services of Eurofins MET Labs. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,  
EUROFINS MET LABS

A handwritten signature in blue ink that reads "Nancy LaBrecque".

Nancy LaBrecque  
Documentation Department

Reference: WIR118717-FCC247 RSS247 FHSS Rev 5

Certificates and reports shall not be reproduced except in full, without the written permission of Eurofins MET Labs.

*The Nation's First Licensed Nationally Recognized Testing Laboratory*

Maryland | California | Texas  
[www.metlabs.com](http://www.metlabs.com)

## Bluetooth FHSS Test Report

for the

HP, Inc.  
P033

**Tested under**  
FCC Part 15 C and RSS-247 Issue 2  
For Intentional Radiators



Bryan Taylor, Wireless Team Lead  
Electromagnetic Compatibility Lab



Nancy LaBrecque  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules Part 15.247 under normal use and maintenance.



Matthew Hinojosa  
EMC Manager, Austin Electromagnetic Compatibility Lab

## Report Status Sheet

| Revision | Report Date        | Reason for Revision                                        |
|----------|--------------------|------------------------------------------------------------|
| Ø        | September 30, 2022 | Initial Issue.                                             |
| 1        | November 4, 2022   | Change Customer's Name and Address                         |
| 2        | December 19, 2022  | Corrections Requested by Customer                          |
| 3        | January 7, 2023    | Technical Revisions Following TCB Review                   |
| 4        | January 17, 2023   | Added a table showing the test channels and power settings |
| 5        | January 27, 2023   | Corrected channel spacing for one transmit mode            |

## Table of Contents

|             |                                                                              |           |
|-------------|------------------------------------------------------------------------------|-----------|
| <b>I.</b>   | <b>Executive Summary .....</b>                                               | <b>8</b>  |
|             | A. Purpose of Test .....                                                     | 9         |
|             | B. Executive Summary .....                                                   | 9         |
| <b>II.</b>  | <b>Equipment Configuration .....</b>                                         | <b>10</b> |
|             | A. Overview.....                                                             | 11        |
|             | B. References.....                                                           | 12        |
|             | C. Test Site .....                                                           | 13        |
|             | D. Measurement Uncertainty .....                                             | 13        |
|             | E. Description of Test Sample.....                                           | 13        |
|             | F. Equipment Configuration.....                                              | 14        |
|             | G. Support Equipment .....                                                   | 14        |
|             | H. Ports and Cabling Information.....                                        | 14        |
|             | I. Mode of Operation.....                                                    | 15        |
|             | J. Method of Monitoring EUT Operation .....                                  | 15        |
|             | K. Modifications .....                                                       | 15        |
|             | a) Modifications to EUT .....                                                | 15        |
|             | b) Modifications to Test Standard.....                                       | 15        |
|             | L. Disposition of EUT .....                                                  | 15        |
| <b>III.</b> | <b>Electromagnetic Compatibility Criteria for Intentional Radiators.....</b> | <b>16</b> |
|             | § 15.203 Antenna Requirement .....                                           | 17        |
|             | § 15.207(a) Conducted Emissions Limits.....                                  | 18        |
|             | § 15.247(a)(a) 6 dB and 99% Bandwidth .....                                  | 21        |
|             | RSS-GEN (6.7) 99% Bandwidth .....                                            | 22        |
|             | §15.247(a)(1) Average Time of Occupancy (Dwell Time) .....                   | 26        |
|             | §15.247(a)(1) Number of RF Channels .....                                    | 34        |
|             | §15.247(a)(1) RF Channel Separation.....                                     | 34        |
|             | § 15.247(b) Peak Power Output .....                                          | 38        |
|             | § 15.247(d) Radiated Spurious Emissions Requirements and Band Edge.....      | 43        |
|             | § 15.247(d) RF Conducted Spurious Emissions Requirements and Band Edge.....  | 59        |
| <b>IV.</b>  | <b>Test Equipment .....</b>                                                  | <b>65</b> |

## List of Tables

|                                                                                        |    |
|----------------------------------------------------------------------------------------|----|
| Table 1. Executive Summary .....                                                       | 9  |
| Table 2. EUT Summary Table.....                                                        | 11 |
| Table 3. References .....                                                              | 12 |
| Table 4. Uncertainty Calculations Summary.....                                         | 13 |
| Table 5. Equipment Configuration .....                                                 | 14 |
| Table 6. Support Equipment.....                                                        | 14 |
| Table 7. Ports and Cabling Information .....                                           | 14 |
| Table 8. Test Channels Utilized .....                                                  | 15 |
| Table 8. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a) ..... | 18 |
| Table 9. Conducted Emissions, 15.207(a), Phase Line, Test Results .....                | 19 |
| Table 10. Conducted Emissions, 15.207(a), Neutral Line, Test Results .....             | 20 |
| Table 11. 99% and 20 dB Occupied Bandwidth, Test Results .....                         | 22 |
| Table 12. Dwell Time Test Results .....                                                | 26 |
| Table 13. Channel Separation Results .....                                             | 34 |
| Table 14. Output Power Requirements from §15.247(b) .....                              | 38 |
| Table 15. Peak Power Output, Test Results .....                                        | 39 |
| Table 16. Restricted Bands of Operation.....                                           | 43 |
| Table 17. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a) .....    | 44 |
| Table 18. Test Equipment List .....                                                    | 66 |

## List of Figures

|                                                                       |    |
|-----------------------------------------------------------------------|----|
| Figure 1. Block Diagram of Test Configuration.....                    | 14 |
| Figure 2. Block Diagram, Occupied Bandwidth Test Setup.....           | 22 |
| Figure 3. Block Diagram, Average Time of Occupancy Test Setup .....   | 26 |
| Figure 4. Peak Power Output Test Setup.....                           | 38 |
| Figure 5. Block Diagram, Conducted Spurious Emissions Test Setup..... | 59 |

## List of Terms and Abbreviations

|              |                                               |
|--------------|-----------------------------------------------|
| AC           | Alternating Current                           |
| ACF          | Antenna Correction Factor                     |
| Cal          | Calibration                                   |
| <i>d</i>     | Measurement Distance                          |
| dB           | Decibels                                      |
| dB $\mu$ A   | Decibels above one <b>microamp</b>            |
| dB $\mu$ V   | Decibels above one <b>microvolt</b>           |
| dB $\mu$ A/m | Decibels above one <b>microamp per meter</b>  |
| dB $\mu$ V/m | Decibels above one <b>microvolt per meter</b> |
| DC           | Direct Current                                |
| E            | Electric Field                                |
| DSL          | Digital Subscriber Line                       |
| ESD          | Electrostatic Discharge                       |
| EUT          | Equipment Under Test                          |
| <i>f</i>     | Frequency                                     |
| FCC          | Federal Communications Commission             |
| GRP          | Ground Reference Plane                        |
| H            | Magnetic Field                                |
| HCP          | Horizontal Coupling Plane                     |
| Hz           | Hertz                                         |
| IEC          | International Electrotechnical Commission     |
| kHz          | kilohertz                                     |
| kPa          | kilopascal                                    |
| kV           | kilovolt                                      |
| LISN         | Line Impedance Stabilization Network          |
| MHz          | Megahertz                                     |
| $\mu$ H      | <b>microhenry</b>                             |
| $\mu$        | <b>microfarad</b>                             |
| $\mu$ s      | <b>microseconds</b>                           |
| NEBS         | Network Equipment-Building System             |
| PRF          | Pulse Repetition Frequency                    |
| RF           | Radio Frequency                               |
| RMS          | Root-Mean-Square                              |
| TWT          | Traveling Wave Tube                           |
| V/m          | Volts <b>per meter</b>                        |
| VCP          | Vertical Coupling Plane                       |

# I. Executive Summary

## A. Purpose of Test

An EMC evaluation was performed to determine compliance of the HP, Inc. P033, with the requirements of FCC Part 15 C and RSS-247 Issue 2. HP, Inc. should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the P033, has been **permanently** discontinued.

## B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 15 C and RSS-247 Issue 2, in accordance with HP, Inc. purchase order number 10000013761. All tests were conducted using measurement procedures ANSI C63.4-2014 and ANSI C63.10-2013.

| FCC Reference<br>47 CFR Part<br>15.247:2005                     | IC Reference<br>RSS-247 Issue 2:<br>2017;<br>RSS-GEN Issue 5:<br>2018 | Description                                  | Compliance |
|-----------------------------------------------------------------|-----------------------------------------------------------------------|----------------------------------------------|------------|
| Title 47 of the CFR,<br>Part 15 §15.203                         | ---                                                                   | Antenna Requirement                          | Compliant  |
| Title 47 of the CFR,<br>Part 15 §15.207(a)                      | RSS-GEN(8.8)                                                          | Conducted Emission Limits                    | Compliant  |
| Title 47 of the CFR,<br>Part 15 §15.247(a)(1)                   | RSS-247 (5.1)                                                         | 20dB Occupied Bandwidth                      | Compliant  |
| ---                                                             | RSS-GEN(6.7)                                                          | 99% Occupied Bandwidth                       | Compliant  |
| Title 47 of the CFR,<br>Part 15 §15.247(a)(1)                   | RSS-247 (5.1)                                                         | Average Time of Occupancy (Dwell Time)       | Compliant  |
| Title 47 of the CFR,<br>Part 15 §15.247(a)(1)                   | RSS-247 (5.1)                                                         | Number of RF Channels                        | Compliant  |
| Title 47 of the CFR,<br>Part 15 §15.247(a)(1)                   | RSS-247 (5.1)                                                         | RF Channel Separation                        | Compliant  |
| Title 47 of the CFR,<br>Part 15 §15.247(b)                      | RSS-247(5.4)                                                          | Peak Power Output                            | Compliant  |
| Title 47 of the CFR,<br>Part 15 §15.247(d);<br>§15.209; §15.205 | RSS-GEN (6.13), (8.9),<br>& (8.10)                                    | Radiated Spurious Emissions Requirements     | Compliant  |
| Title 47 of the CFR,<br>Part 15 §15.247(d)                      | RSS-247(5.5)                                                          | RF Conducted Spurious Emissions Requirements | Compliant  |
| Title 47 of the CFR,<br>Part 15; §15.247(e)                     | RSS-247(5.2)                                                          | Peak Power Spectral Density                  | Compliant  |

Table 1. Executive Summary

## II. Equipment Configuration

## A. Overview

Eurofins MET Labs was contracted by HP, Inc. to perform testing on the P033, under HP, Inc.'s purchase order number 10000013761.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the HP, Inc. P033.

The results obtained relate only to the item(s) tested.

|                                       |                                                         |                   |
|---------------------------------------|---------------------------------------------------------|-------------------|
| <b>Model(s) Tested:</b>               | P033                                                    |                   |
| <b>Model(s) Covered:</b>              | P033                                                    |                   |
| <b>EUT Specifications:</b>            | Primary Power: 120VAC                                   |                   |
|                                       | Type of Modulations:                                    | GFSK, QPSK, 8DPSK |
|                                       | Equipment Code:                                         | DSS               |
|                                       | Peak RF Output Power:                                   | 7.04dBm           |
|                                       | EUT Frequency Ranges:                                   | 2402-2480 MHz     |
|                                       | Antenna Gain (declared by HP, Inc.)                     | 4.09dBi           |
| <b>Analysis:</b>                      | The results obtained relate only to the item(s) tested. |                   |
| <b>Environmental Test Conditions:</b> | Temperature: 15-35° C                                   |                   |
|                                       | Relative Humidity: 30-60%                               |                   |
|                                       | Barometric Pressure: 860-1060 mbar                      |                   |
| <b>Evaluated by:</b>                  | Bryan Taylor                                            |                   |
| <b>Report Date(s):</b>                | 4/20/2022 through 5/27/2022                             |                   |

**Table 2. EUT Summary Table**

## B. References

|                                        |                                                                                                                                                                       |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CFR 47, Part 15, Subpart C</b>      | Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies |
| <b>RSS-247, Issue 2, February 2017</b> | Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices                                          |
| <b>RSS-GEN, Issue 5, March 2019</b>    | General Requirements and Information for the Certification of Radio Apparatus                                                                                         |
| <b>ANSI C63.4:2014</b>                 | Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz                                |
| <b>ISO/IEC 17025:2017</b>              | General Requirements for the Competence of Testing and Calibration Laboratories                                                                                       |
| <b>ANSI C63.10-2013</b>                | American National Standard for Testing Unlicensed Wireless Devices                                                                                                    |

Table 3. References

## C. Test Site

All testing was performed at Eurofins MET Labs, 13501 McCallen Pass, Austin, TX 78753. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 10 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.


## D. Measurement Uncertainty

| Test Method                  | Typical Expanded Uncertainty | K | Confidence Level |
|------------------------------|------------------------------|---|------------------|
| RF Frequencies               | ±4.52 Hz                     | 2 | 95%              |
| RF Power Conducted Emissions | ±2.97 dB                     | 2 | 95%              |
| RF Power Radiated Emissions  | ±2.95 dB                     | 2 | 95%              |

Table 4. Uncertainty Calculations Summary

## E. Description of Test Sample

The HP, Inc. P033 (marketed as Studio 52), is a video conferencing video bar designed to act as an audio / video endpoint codec over LAN networks. The device is powered by a AC/DC mains adapter and contains 2.4GHz / 5Ghz Wifi and Bluetooth radio interfaces.



**Figure 1. Block Diagram of Test Configuration**

## F. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. The laptop computer was used to send test commands to force the transmitters to operate in the appropriate test mode.

| Ref. ID | Name / Description | Model Number | Part Number | Serial Number | Revision |
|---------|--------------------|--------------|-------------|---------------|----------|
| 1       | P033               | P033         | N/A         | Test Sample 1 | N/A      |

**Table 5. Equipment Configuration**

## G. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

| Ref. ID | Name / Description | Manufacturer | Model Number | Customer Supplied Calibration Data |
|---------|--------------------|--------------|--------------|------------------------------------|
| 1       | Laptop Computer    | Dell         | HW_Lab       | --                                 |

**Table 6. Support Equipment**

## H. Ports and Cabling Information

| Ref. Id | Port Name on EUT | Qty | Length as tested (m) | Shielded? (Y/N) | Termination Box ID & Port Name |
|---------|------------------|-----|----------------------|-----------------|--------------------------------|
| 5       | DC Power         | 1   | 2m                   | No              | AC/DC adaptor                  |
| 9       | USB C            | 1   | 10m                  | No              | Laptop Computer                |

**Table 7. Ports and Cabling Information**

## I. Mode of Operation

The support laptop provided a direct means of controlling transmitter parameters. Unless otherwise stated or shown, all tests were performed at worst-case modulation and data rates on the following channels.

| Transmit Band    | Operating Mode | Channel Frequencies Tested  | Test Tool Power Setting |
|------------------|----------------|-----------------------------|-------------------------|
| 2400 – 2483.5MHz | GFSK           | 2402MHz / 2441MHz / 2480MHz | 9.0dBm                  |
|                  | Pi/4 DQPSK     | 2402MHz / 2441MHz / 2480MHz | 9.0dBm                  |
|                  | 8DPSK          | 2402MHz / 2441MHz / 2480MHz | 9.0dBm                  |

**Table 8. Test Channels Utilized**

Additionally, some tests required the test sample to operate in its normal frequency hopping mode.

## J. Method of Monitoring EUT Operation

A spectrum analyzer was used to confirm proper transmitter operation.

## K. Modifications

### a) Modifications to EUT

No modifications were made to the EUT.

### b) Modifications to Test Standard

No modifications were made to the test standard.

## L. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to HP, Inc. upon completion of testing.

### **III. Electromagnetic Compatibility Criteria for Intentional Radiators**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.203 Antenna Requirement

**Test Requirement:** § 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Results:** The EUT as tested is compliant the criteria of §15.203. The TX antenna is not accessible by the end user.

**Test Engineer(s):** Bryan Taylor

**Test Date(s):** 5/3/2022

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.207(a) Conducted Emissions Limits

**Test Requirement(s):** § 15.207 (a): For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Omega$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency range<br>(MHz) | § 15.207(a), Conducted Limit (dB $\mu$ V) |         |
|--------------------------|-------------------------------------------|---------|
|                          | Quasi-Peak                                | Average |
| 0.15-0.5                 | 66 - 56                                   | 56 - 46 |
| 0.5-5                    | 56                                        | 46      |
| 5-30                     | 60                                        | 50      |

**Table 9. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)**

**Test Procedure:** The EUT was placed on a 0.8 m-high wooden table. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50  $\Omega$ /50  $\mu$ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with ANSI C63.4-2014 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz". The measurements were performed using a 50  $\Omega$ /50  $\mu$ H LISN as the input transducer to an EMI receiver. For the purpose of this testing, the transmitter was turned on.

**Test Results:** The EUT was compliant with this requirement.

**Test Engineer(s):** James Seib


**Test Date(s):** 4/20/2022

## 15.207(a) Conducted Emissions Test Results

| Measurement Location                                 | Measurement | Limit    | Result |
|------------------------------------------------------|-------------|----------|--------|
| Bonding measurement from LISN ground to ground plane | 2.095 mΩ    | < 2.5 mΩ | Pass   |

| Line                | Freq (MHz) | QP Amplitude (dBμV) | QP Limit (dBμV) | Margin (dB) | Result | Average Amplitude (dBμV) | Average Limit (dBμV) | Margin (dB) | Result |
|---------------------|------------|---------------------|-----------------|-------------|--------|--------------------------|----------------------|-------------|--------|
| Line 120 VAC/60 Hz. | 21.234     | 42.40               | 73.00           | -30.60      | Pass   | 38.90                    | 60.00                | -21.10      | Pass   |
| Line 120 VAC/60 Hz. | 0.190      | 42.40               | 79.00           | -36.60      | Pass   | 28.50                    | 66.00                | -37.50      | Pass   |
| Line 120 VAC/60 Hz. | 15.578     | 36.90               | 73.00           | -36.10      | Pass   | 31.50                    | 60.00                | -28.50      | Pass   |
| Line 120 VAC/60 Hz. | 0.150      | 48.50               | 79.00           | -30.50      | Pass   | 32.50                    | 66.00                | -33.50      | Pass   |
| Line 120 VAC/60 Hz. | 0.286      | 33.40               | 79.00           | -45.60      | Pass   | 21.70                    | 66.00                | -44.30      | Pass   |
| Line 120 VAC/60 Hz. | 0.318      | 32.00               | 79.00           | -47.00      | Pass   | 22.00                    | 66.00                | -44.00      | Pass   |

Table 10. Conducted Emissions, 15.207(a), Phase Line, Test Results

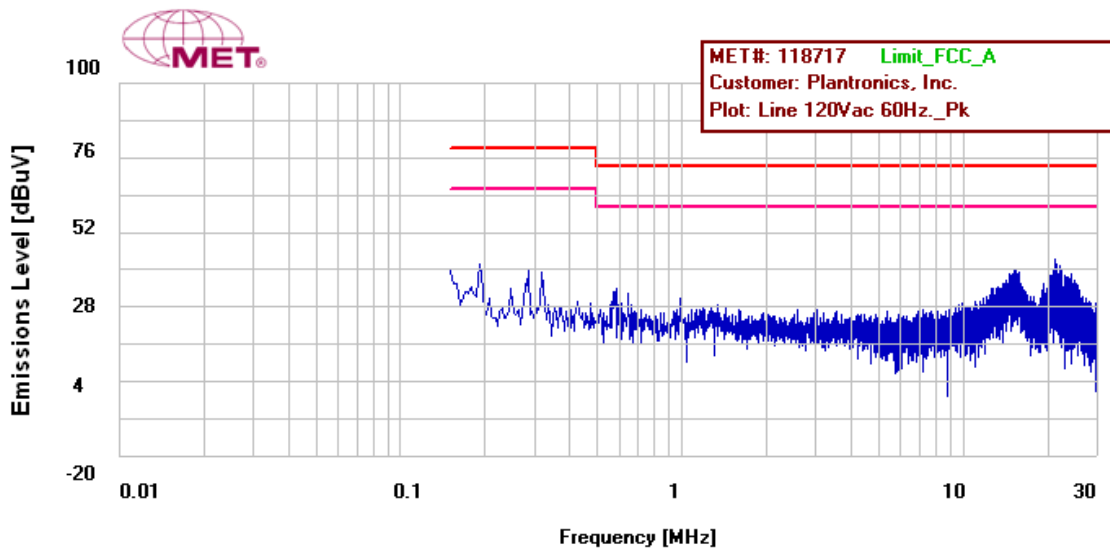


Conducted Emissions, 15.207(a), Phase Line

## 15.207(a) Conducted Emissions Test Results

| Measurement Location                                 | Measurement | Limit    | Result |
|------------------------------------------------------|-------------|----------|--------|
| Bonding measurement from LISN ground to ground plane | 2.095 mΩ    | < 2.5 mΩ | Pass   |

| Line                   | Freq (MHz) | QP Amplitude (dBμV) | QP Limit (dBμV) | Margin (dB) | Result | Average Amplitude (dBμV) | Average Limit (dBμV) | Margin (dB) | Result |
|------------------------|------------|---------------------|-----------------|-------------|--------|--------------------------|----------------------|-------------|--------|
| Neutral 120 VAC/60 Hz. | 0.190      | 43.20               | 79.00           | -35.80      | Pass   | 29.20                    | 66.00                | -36.80      | Pass   |
| Neutral 120 VAC/60 Hz. | 0.218      | 39.50               | 79.00           | -39.50      | Pass   | 25.90                    | 66.00                | -40.10      | Pass   |
| Neutral 120 VAC/60 Hz. | 0.154      | 48.40               | 79.00           | -30.60      | Pass   | 32.00                    | 66.00                | -34.00      | Pass   |
| Neutral 120 VAC/60 Hz. | 0.254      | 36.00               | 79.00           | -43.00      | Pass   | 23.00                    | 66.00                | -43.00      | Pass   |
| Neutral 120 VAC/60 Hz. | 21.482     | 41.70               | 73.00           | -31.30      | Pass   | 38.20                    | 60.00                | -21.80      | Pass   |
| Neutral 120 VAC/60 Hz. | 0.582      | 37.50               | 73.00           | -35.50      | Pass   | 30.20                    | 60.00                | -29.80      | Pass   |

Table 11. Conducted Emissions, 15.207(a), Neutral Line, Test Results

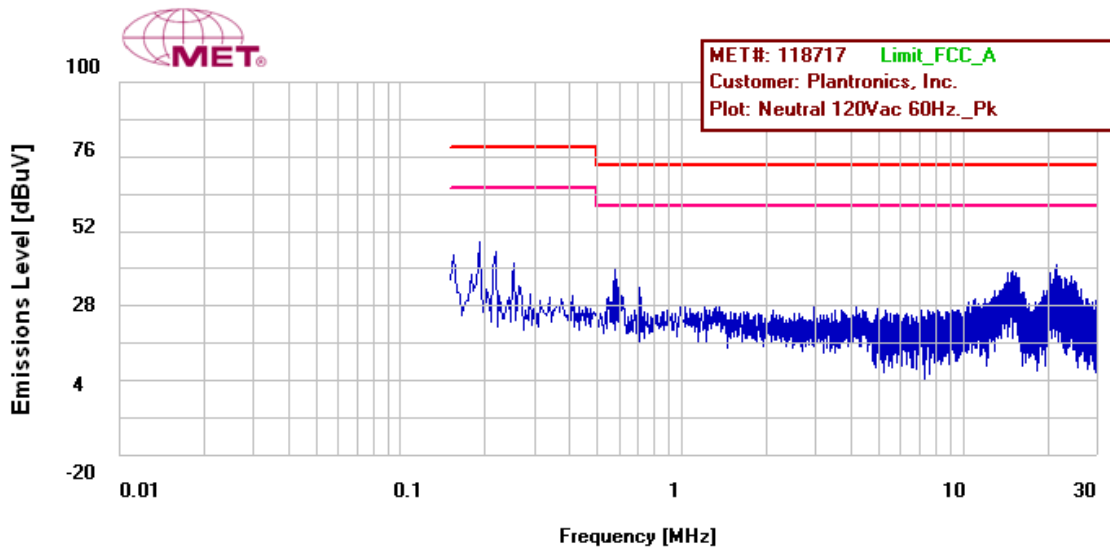

Conducted Emissions, 15.207(a), Neutral Line

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(a)(1) 20 dB Bandwidth

**Test Requirements:** § 15.247(a): Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. For DTS, the minimum 6 dB bandwidth shall be at least 500 kHz. For frequency hopping systems, the EUT shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

**Test Procedure:** The transmitter was on and transmitting at the highest output power. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately 1% of the total emission bandwidth, and the VBW > RBW. The 20 dB Bandwidth was measured and recorded. The measurements were performed on the low, mid and high channels.

**Test Results** The EUT was compliant with § 15.247 (a)(1).

The 20 dB Bandwidth was determined from the plots on the following pages.

**Test Engineer(s):** Bryan Taylor

**Test Date(s):** 5/3/2022

## Electromagnetic Compatibility Criteria for Intentional Radiators

### RSS-GEN (6.7) 99% Bandwidth

**Test Requirements:** The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

**Test Procedure:** The transmitter was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth, and the VBW > RBW. The 99% Bandwidth was measured and recorded.

**Test Results** The 99% Bandwidth determined from the plots on the following pages.

**Test Engineer(s):** Bryan Taylor

**Test Date(s):** 5/3/2022

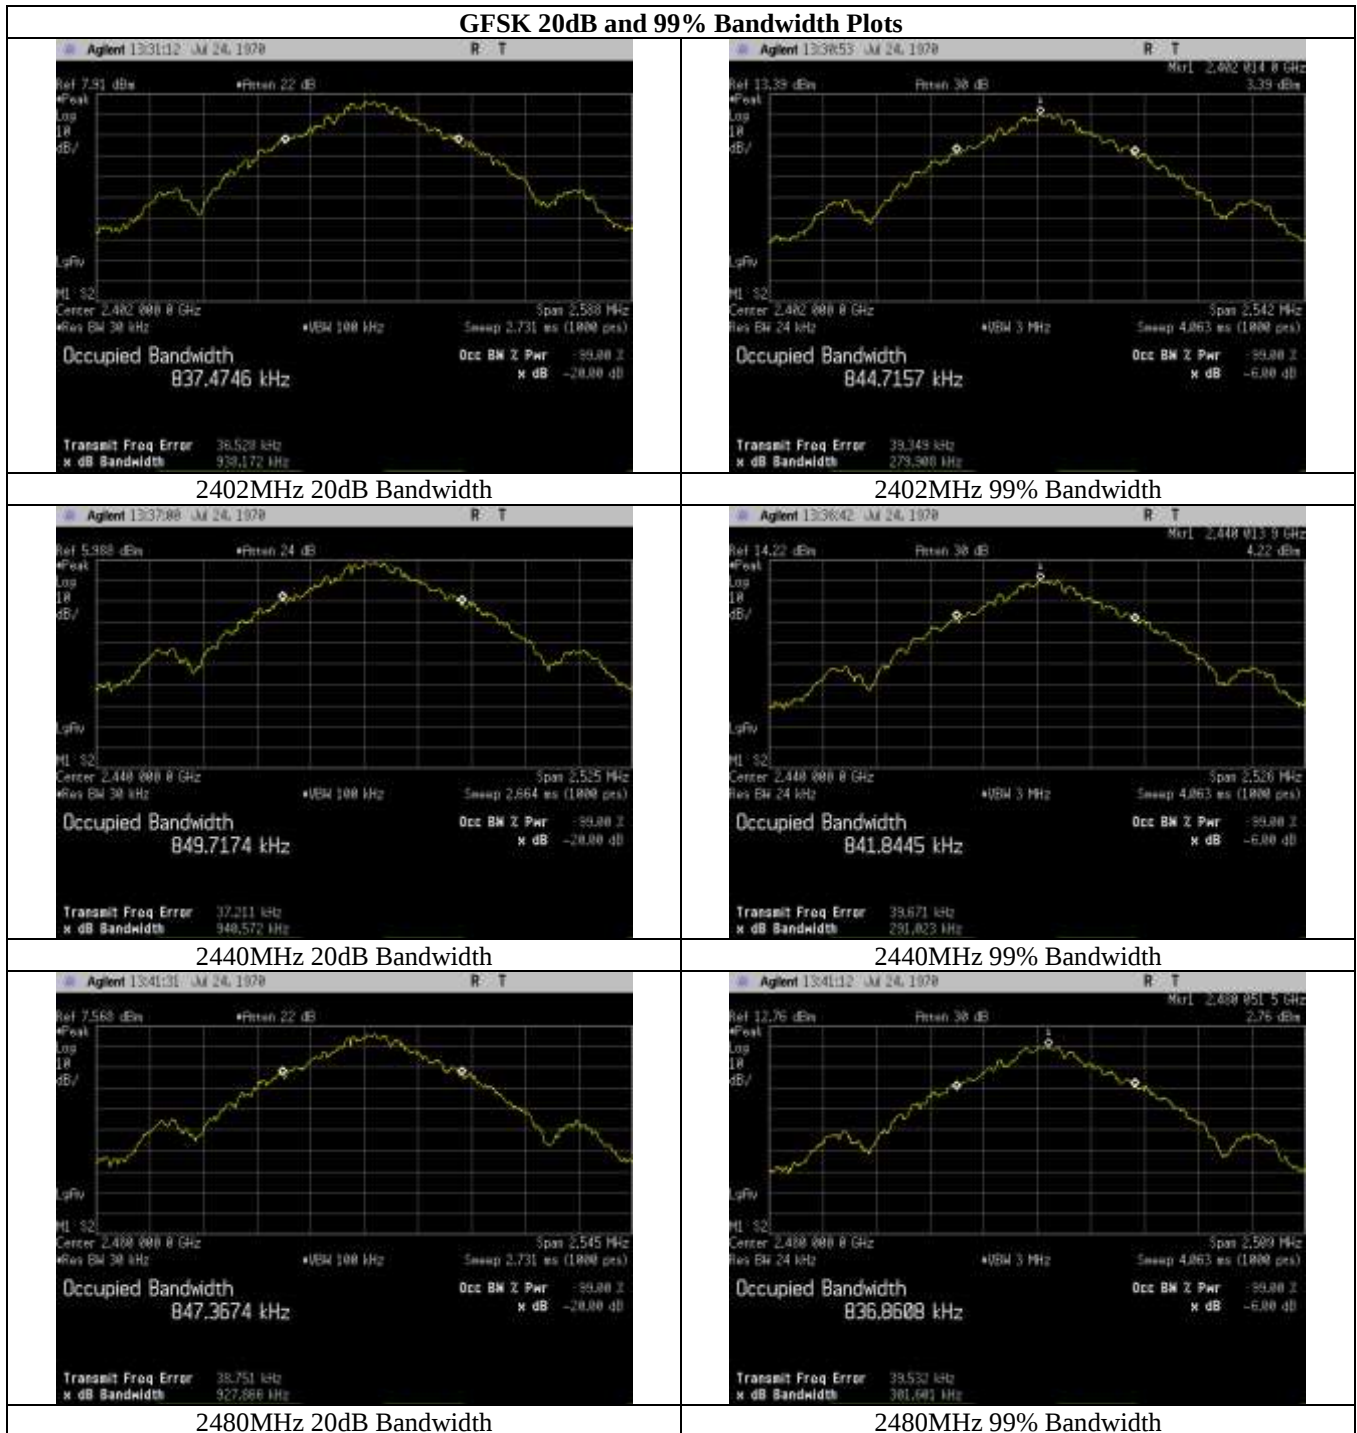


Figure 2. Block Diagram, Occupied Bandwidth Test Setup


| 2.4GHz FHSS FCC OBW       | Port 1<br>(-20dB) | Port 1<br>(99%) |
|---------------------------|-------------------|-----------------|
| Low Ch_2402MHz_GFSK       | 0.938             | 0.845           |
| Mid Ch_2441MHz_GFSK       | 0.941             | 0.842           |
| High Ch_2480MHz_GFSK      | 0.928             | 0.837           |
| Low Ch_2402MHz_Pi_4DQPSK  | 1.370             | 1.214           |
| Mid Ch_2441MHz_Pi_4DQPSK  | 1.379             | 1.211           |
| High Ch_2480MHz_Pi_4DQPSK | 1.383             | 1.215           |
| Low Ch_2402MHz_8DPSK      | 1.351             | 1.224           |
| Mid Ch_2441MHz_8DPSK      | 1.358             | 1.227           |
| High Ch_2480MHz_8DPSK     | 1.356             | 1.234           |

Table 12. 99% and 20 dB Occupied Bandwidth, Test Results


## Occupied Bandwidth Test Results



**Pi/4DQPSK 20dB and 99% Bandwidth Plots**

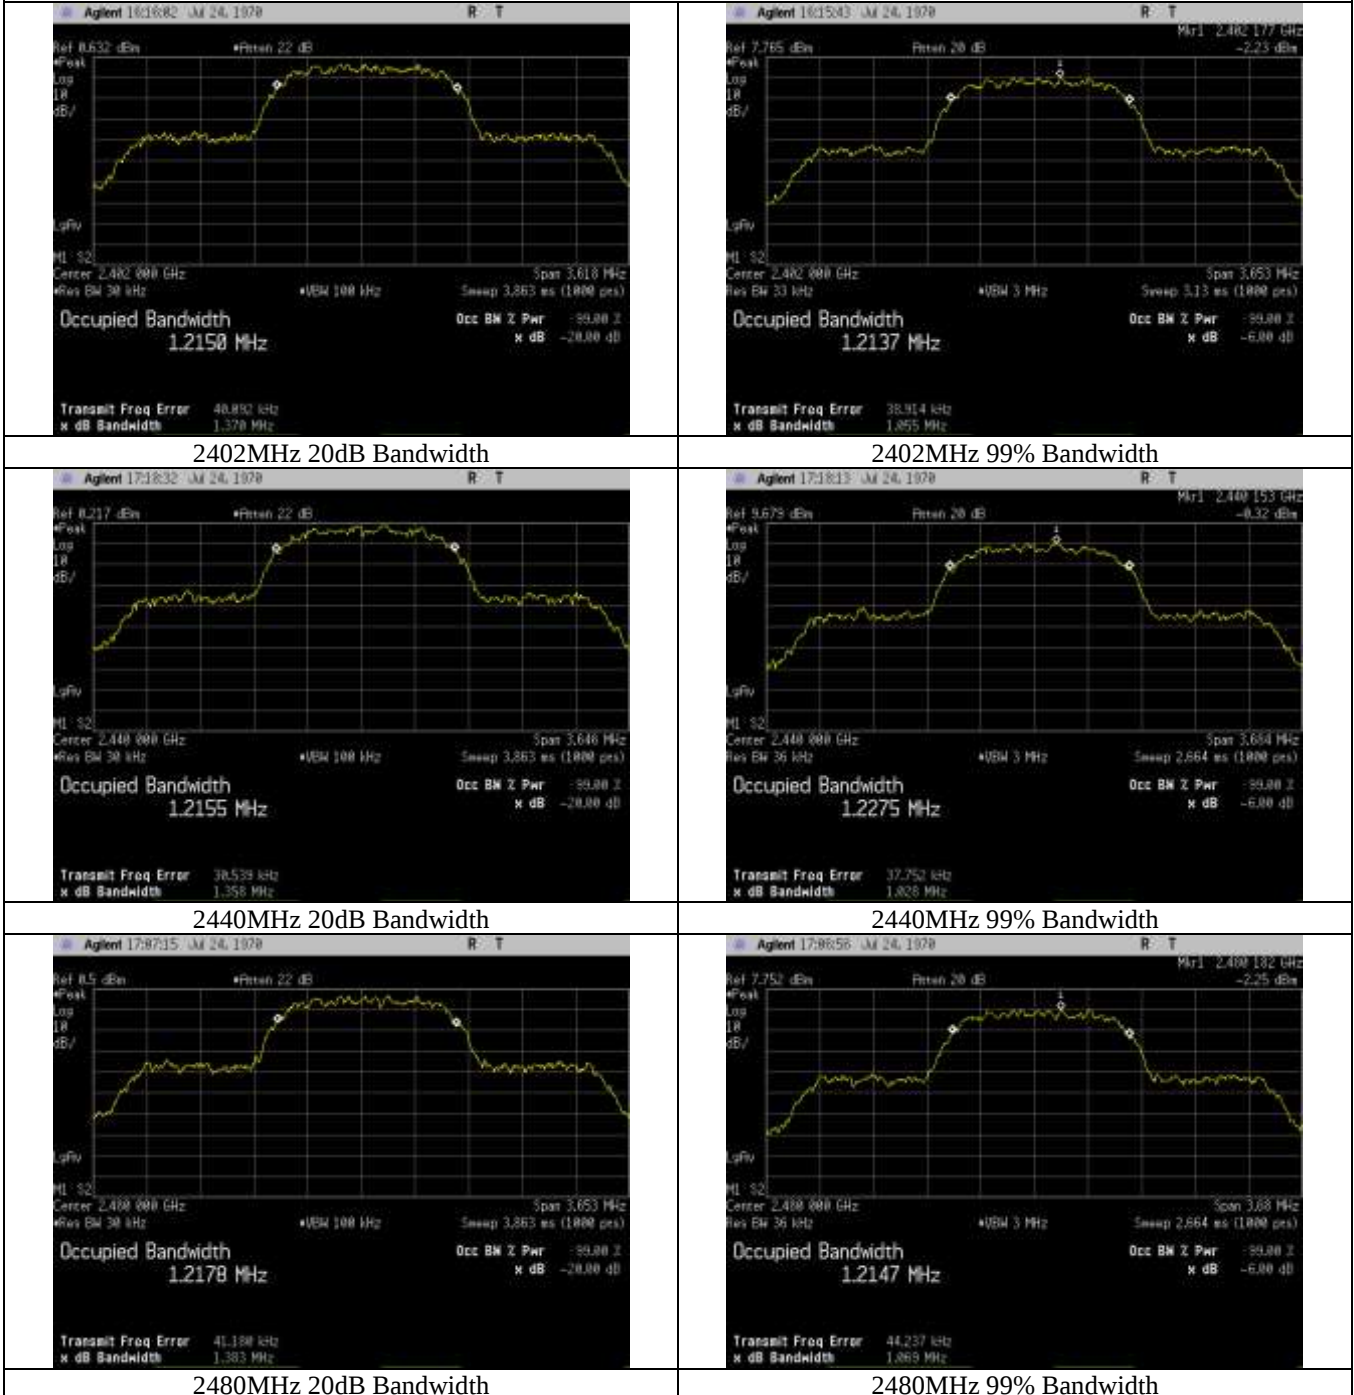

### 8DPSK 20dB and 99% Bandwidth Plots

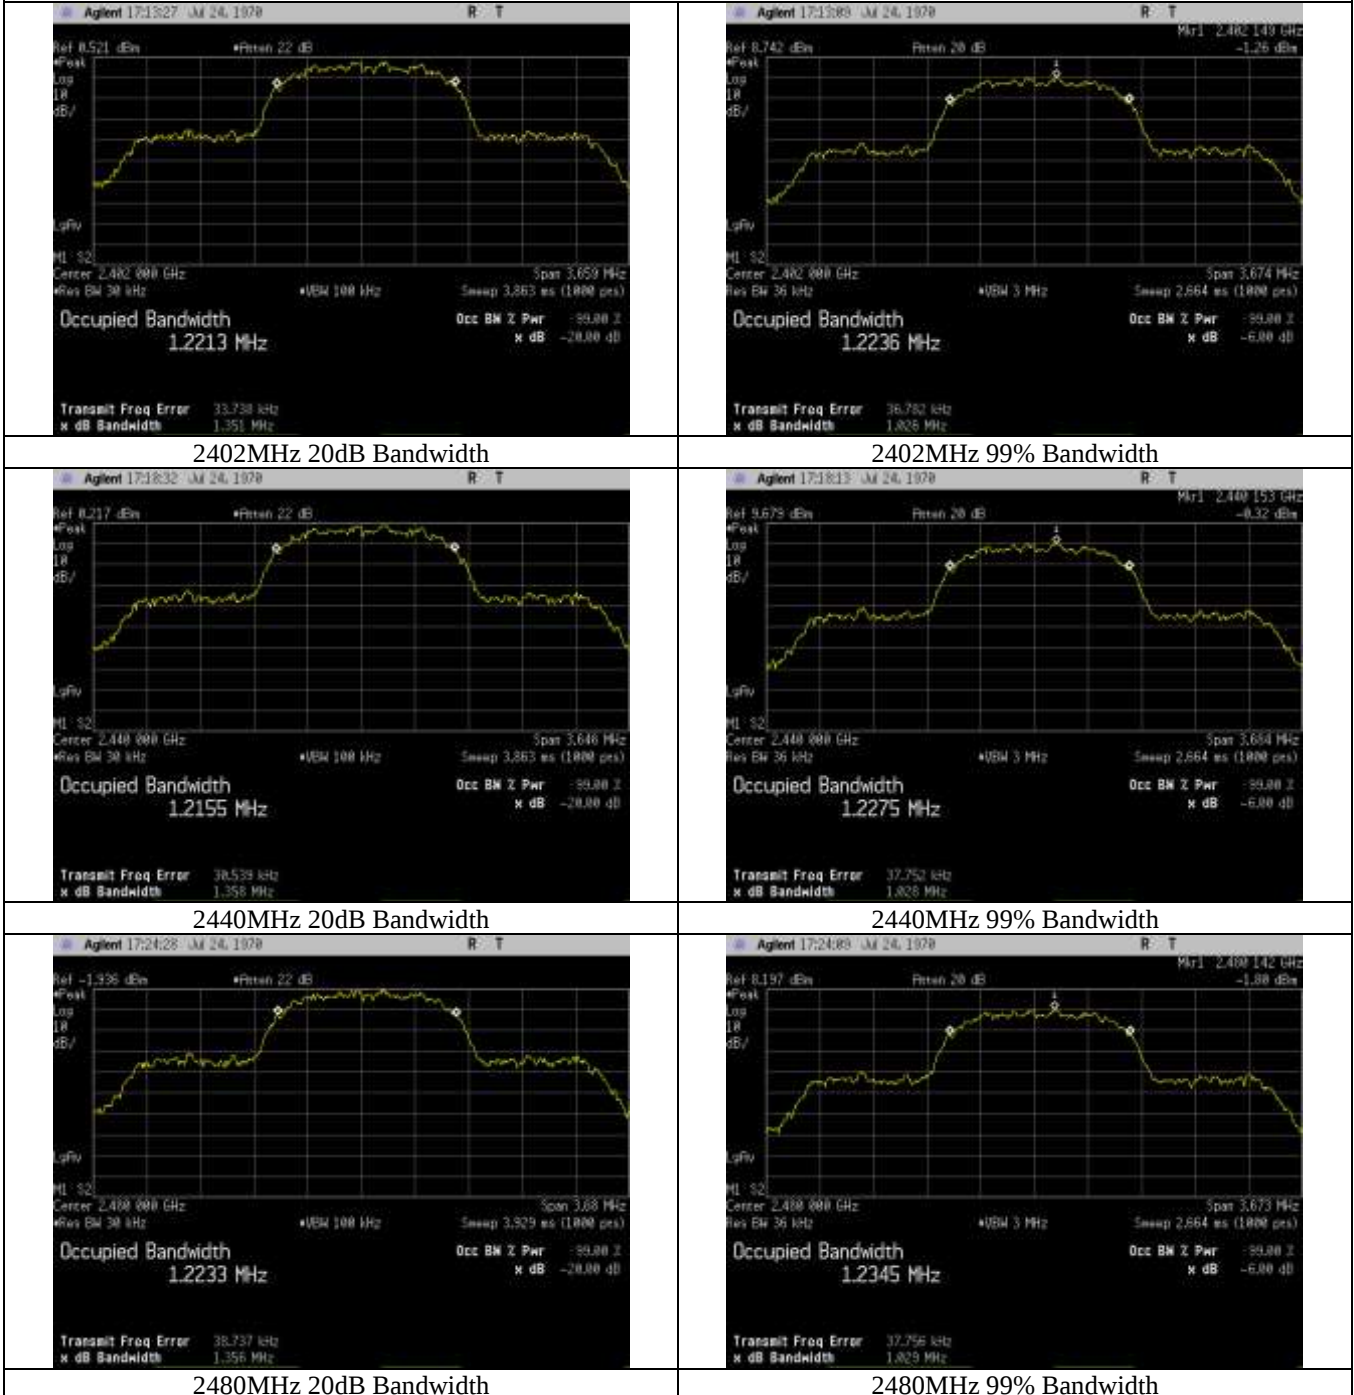

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(a)(1) Average Time of Occupancy (Dwell Time)

**Test Requirements:** Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Results:** The average time of occupancy for each transmit mode is less than the 0.4 seconds for each transmit mode.

**Test Engineer(s):** Bryan Taylor

**Test Date(s):** 5/3/2022

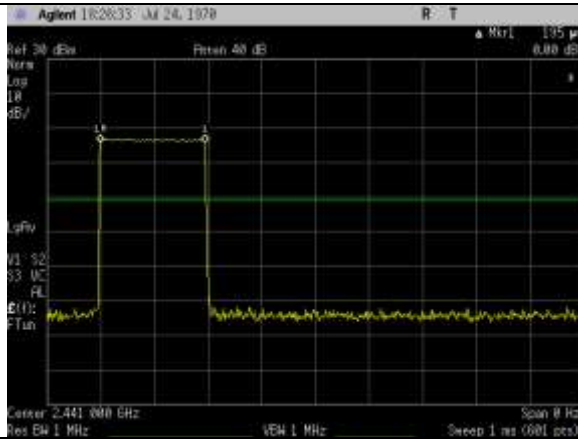


Figure 3. Block Diagram, Average Time of Occupancy Test Setup


|                               | Pulse Width (msec) | Number of Pulse in 3.16 (sec) | Average Time of Occupancy (sec) | Limit (sec) | Margin (sec) |
|-------------------------------|--------------------|-------------------------------|---------------------------------|-------------|--------------|
| <b>2.4GHz FHSS Dwell Time</b> |                    |                               |                                 |             |              |
| GFSK_DH1                      | 0.192              | 31.0                          | 0.059                           | 0.4         | 0.341        |
| GFSK_DH3                      | 1.633              | 16.0                          | 0.261                           | 0.4         | 0.139        |
| GFSK_DH5                      | 2.830              | 14.0                          | 0.396                           | 0.4         | 0.004        |
| Pi/4DQPSK_2DH1                | 0.383              | 32.0                          | 0.123                           | 0.4         | 0.277        |
| Pi/4DQPSK_2DH3                | 1.633              | 16.0                          | 0.261                           | 0.4         | 0.139        |
| Pi/4DQPSK_2DH5                | 2.883              | 11.0                          | 0.317                           | 0.4         | 0.083        |
| 8DPSK_3DH1                    | 0.385              | 27.0                          | 0.104                           | 0.4         | 0.296        |
| 8DPSK_3DH3                    | 1.640              | 13.0                          | 0.213                           | 0.4         | 0.187        |
| 8DPSK_3DH5                    | 2.867              | 7.0                           | 0.201                           | 0.4         | 0.199        |

Table 13. Dwell Time Test Results


### GFSK Timing Plots




DH1 Pulse Width

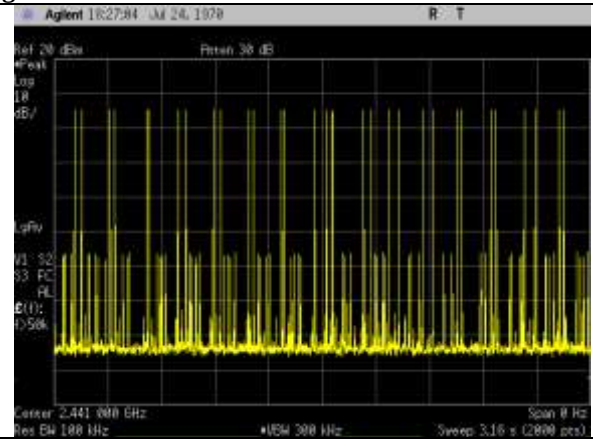


DH1 Number of Pulses in 1 Second

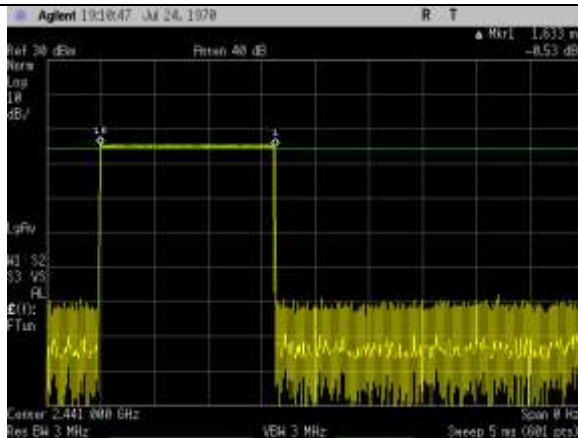


DH3 Pulse Width

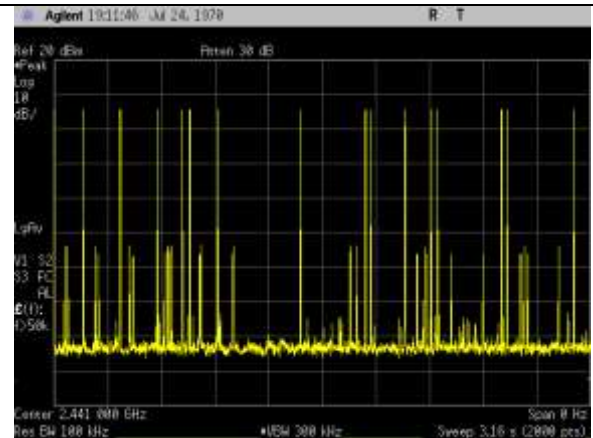


DH3 Number of Pulses in 1 Second

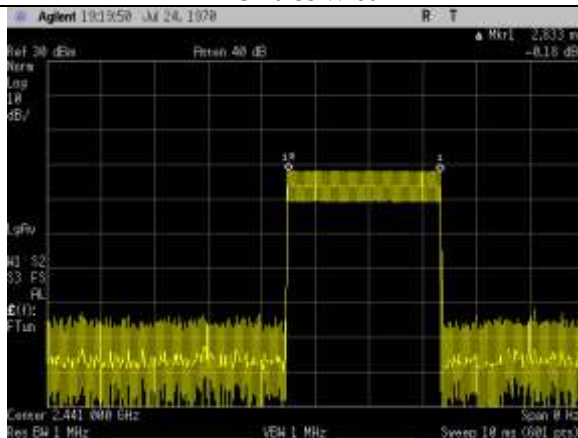


DH5 Pulse Width

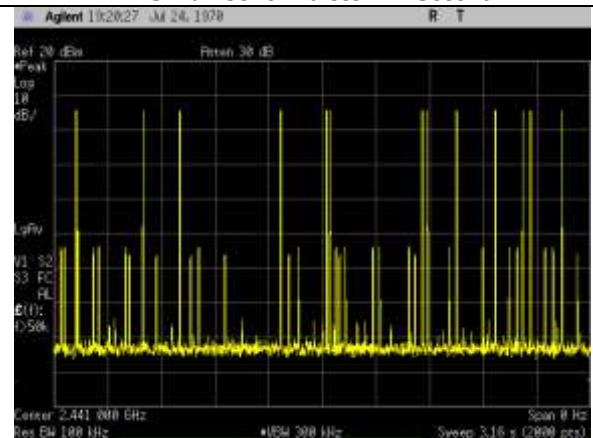


DH5 Number of Pulses in 1 Second

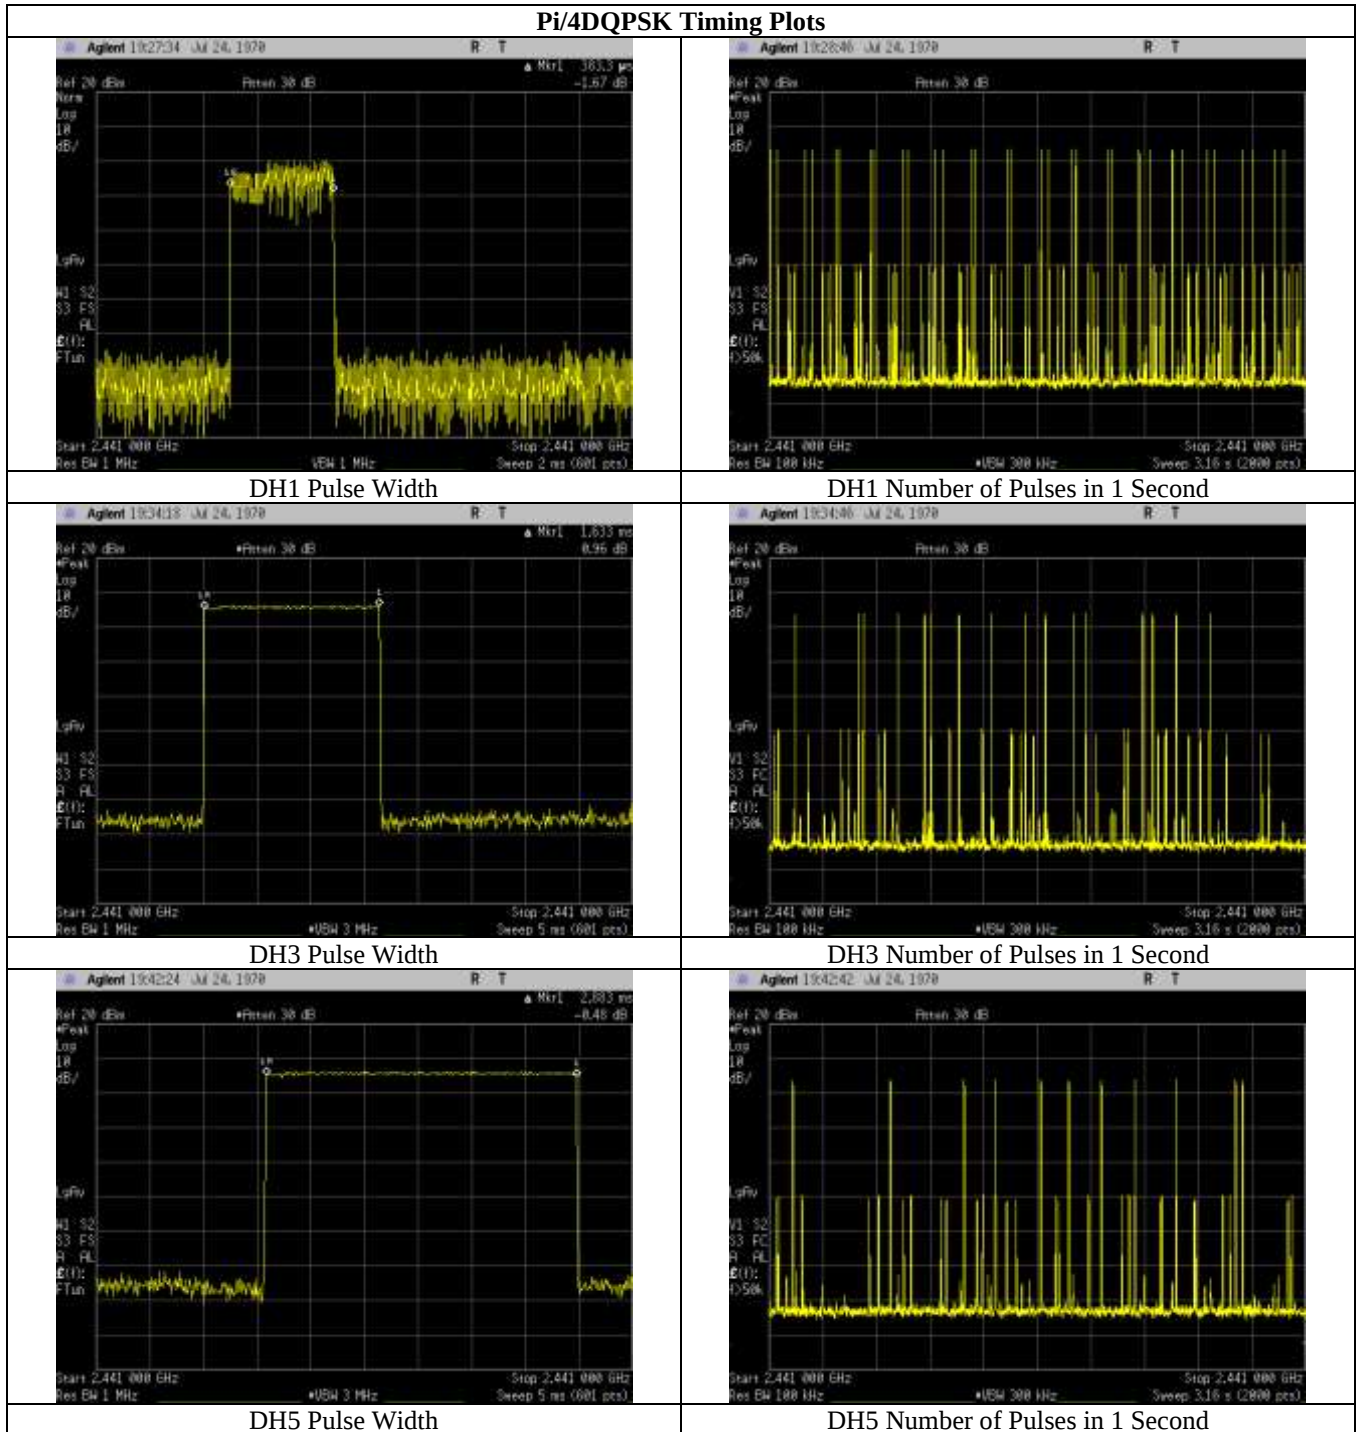


### 8DPSK Timing Plots

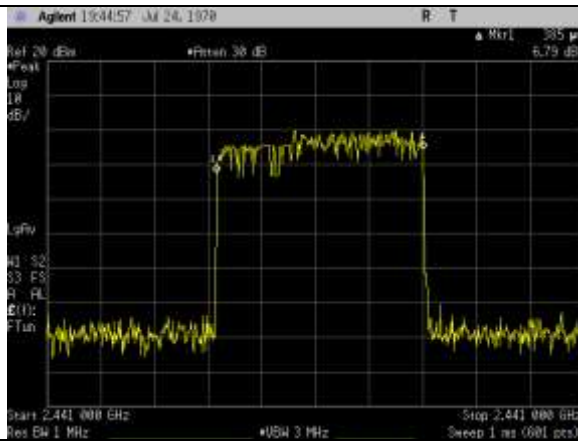


DH1 Pulse Width

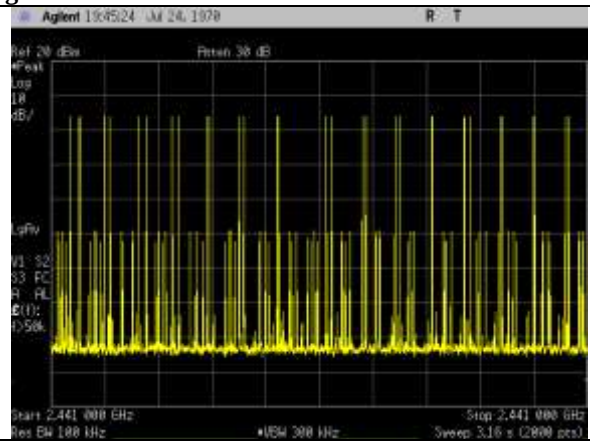


DH1 Number of Pulses in 1 Second

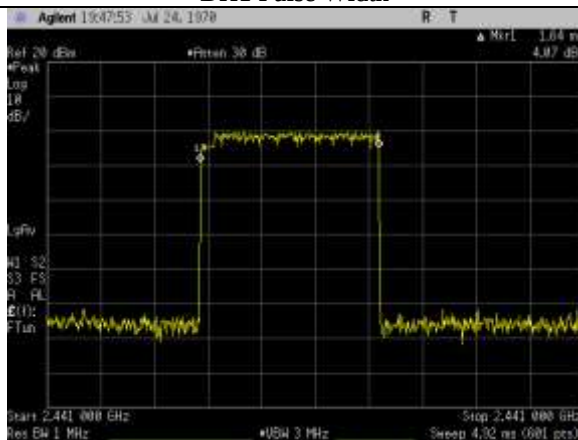


DH3 Pulse Width

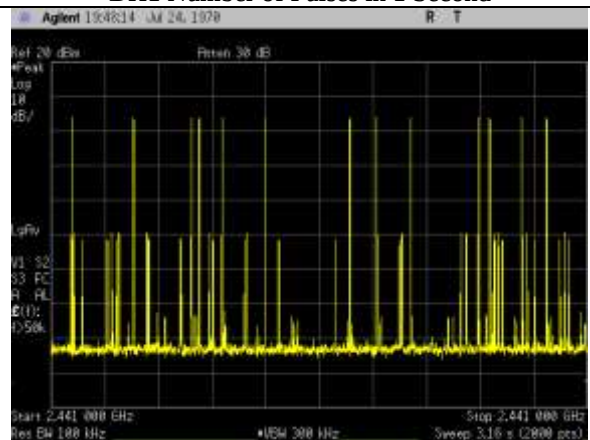

DH3 Number of Pulses in 1 Second

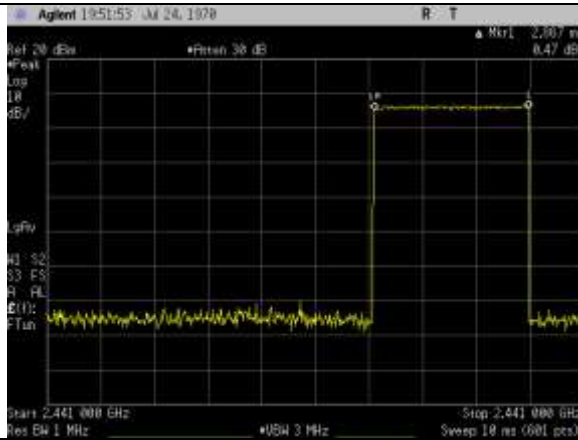

DH5 Pulse Width

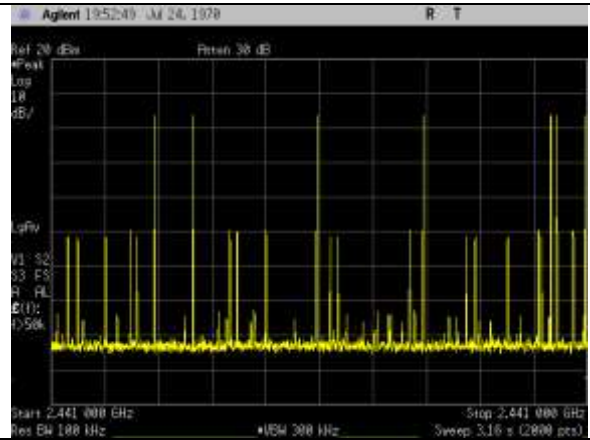


DH5 Number of Pulses in 1 Second

## Electromagnetic Compatibility Criteria for Intentional Radiators


### § 15.247(a)(1)      **Number of RF Channels**

Total hopping channels is 79. The EUT meets the specifications of Section 15.247(a) (1) (iii) for Number of Hopping Channels.

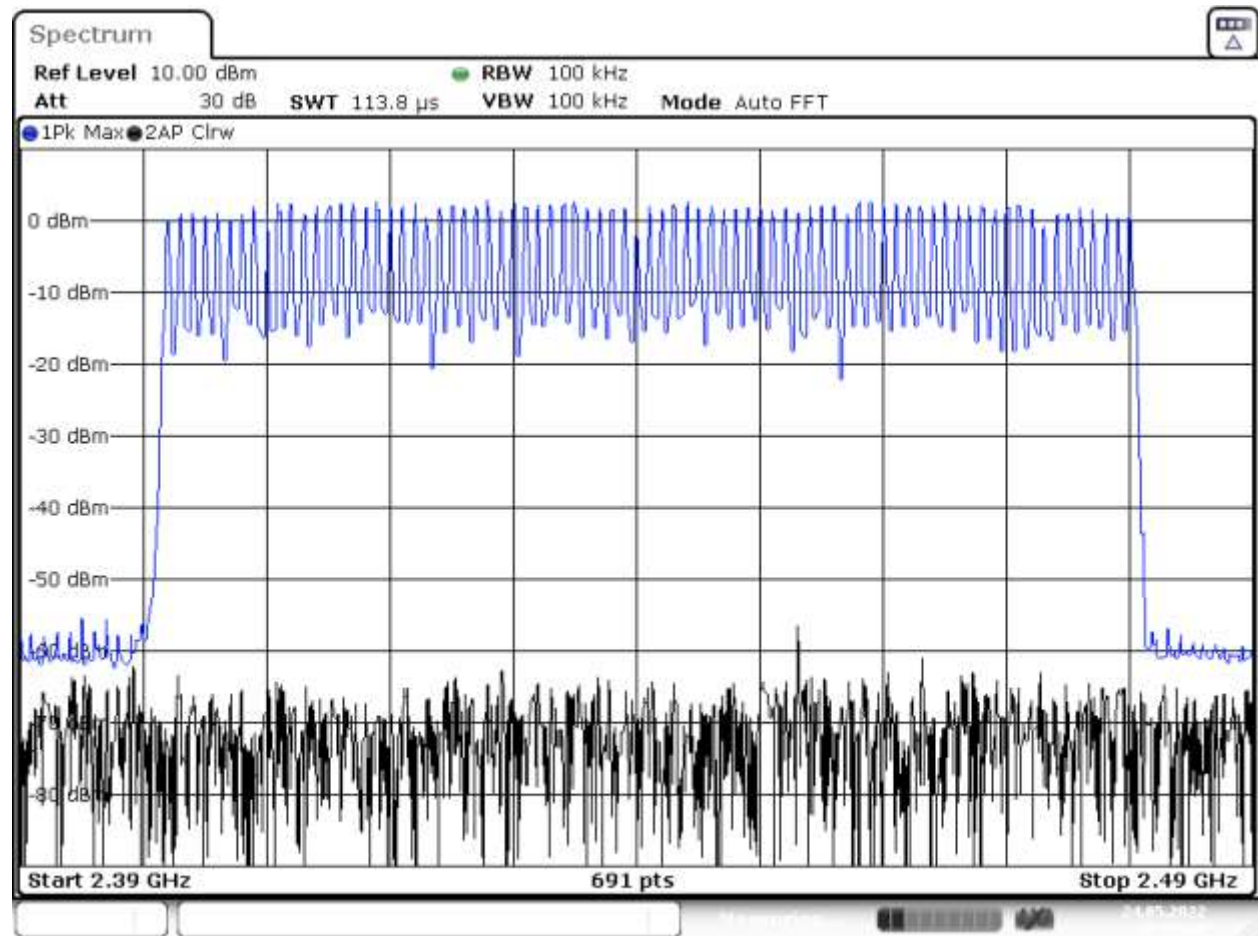


Date: 24.MAY.2022 18:54:40

GFSK: 79 Hopping Channels

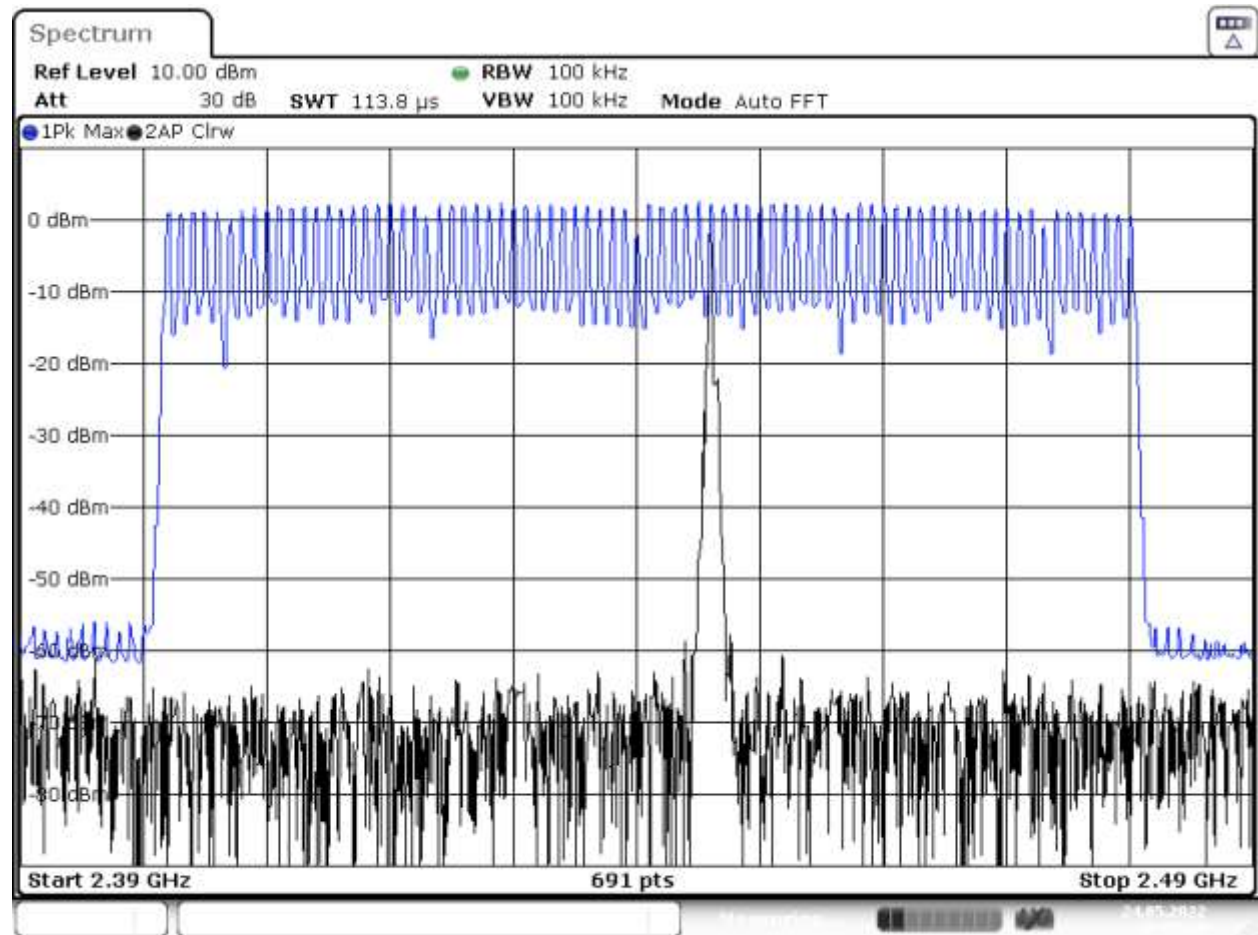

Date: 24.MAY.2022 18:57:40

Pi/4DQPSK: 79 Hopping Channels

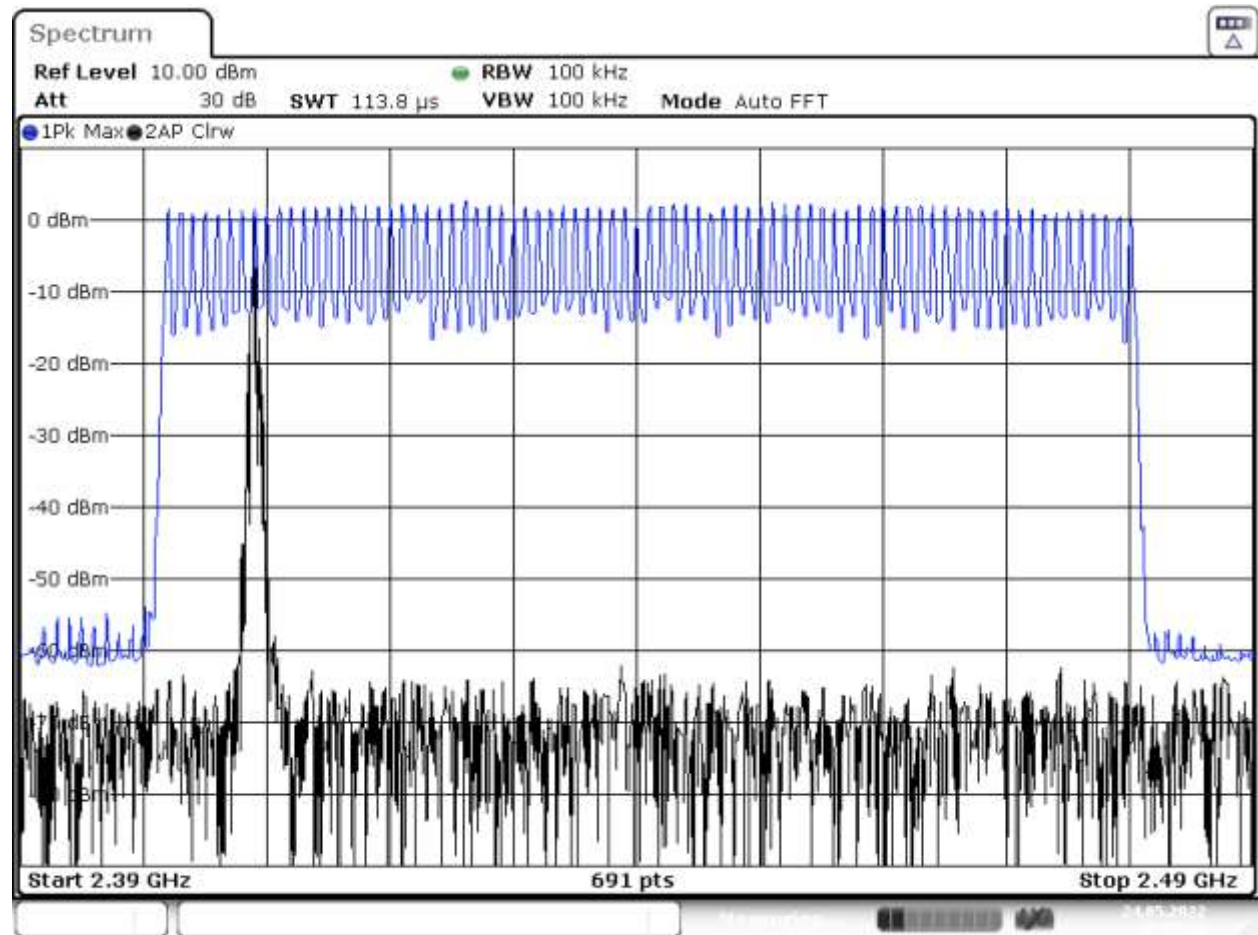

Date: 24.MAY.2022 18:59:41

DQPSK: 79 Hopping Channels

## Electromagnetic Compatibility Criteria for Intentional Radiators


### § 15.247(a)(1) RF Channel Separation


**Requirement:** Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


**Remarks:** EUT operates below 125mW (20dBm). Channels are separated by more than two thirds of the -20dB Bandwidth.

|                               | Channel<br>Sepration<br>(MHz) |
|-------------------------------|-------------------------------|
| <b>2.4GHz FHSS Dwell Time</b> |                               |
| GFSK_DH1                      | 1.000                         |
| GFSK_DH3                      | 1.000                         |
| GFSK_DH5                      | 1.000                         |
| Pi/4DQPSK_2DH1                | 1.000                         |
| Pi/4DQPSK_2DH3                | 1.000                         |
| Pi/4DQPSK_2DH5                | 1.000                         |
| 8DPSK_3DH1                    | 1.000                         |
| 8DPSK_3DH3                    | 1.000                         |
| 8DPSK_3DH5                    | 1.000                         |

**Table 14. Channel Separation Results**

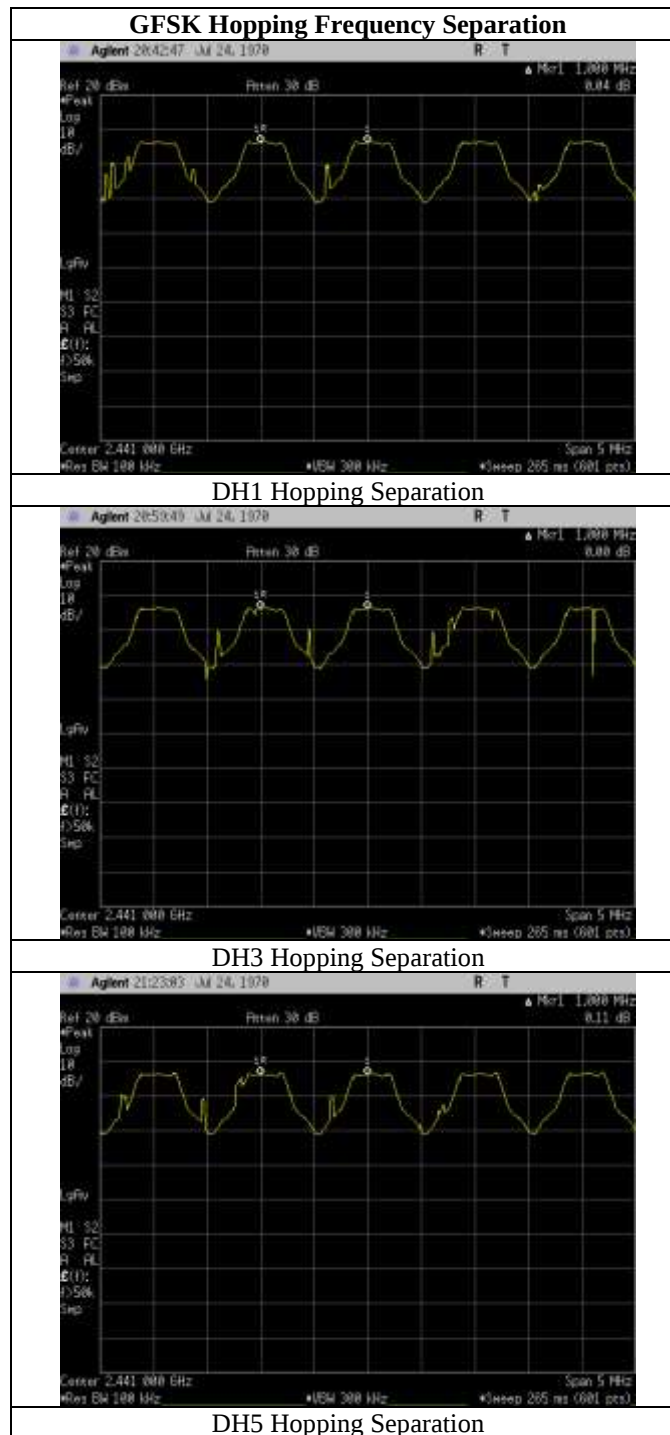

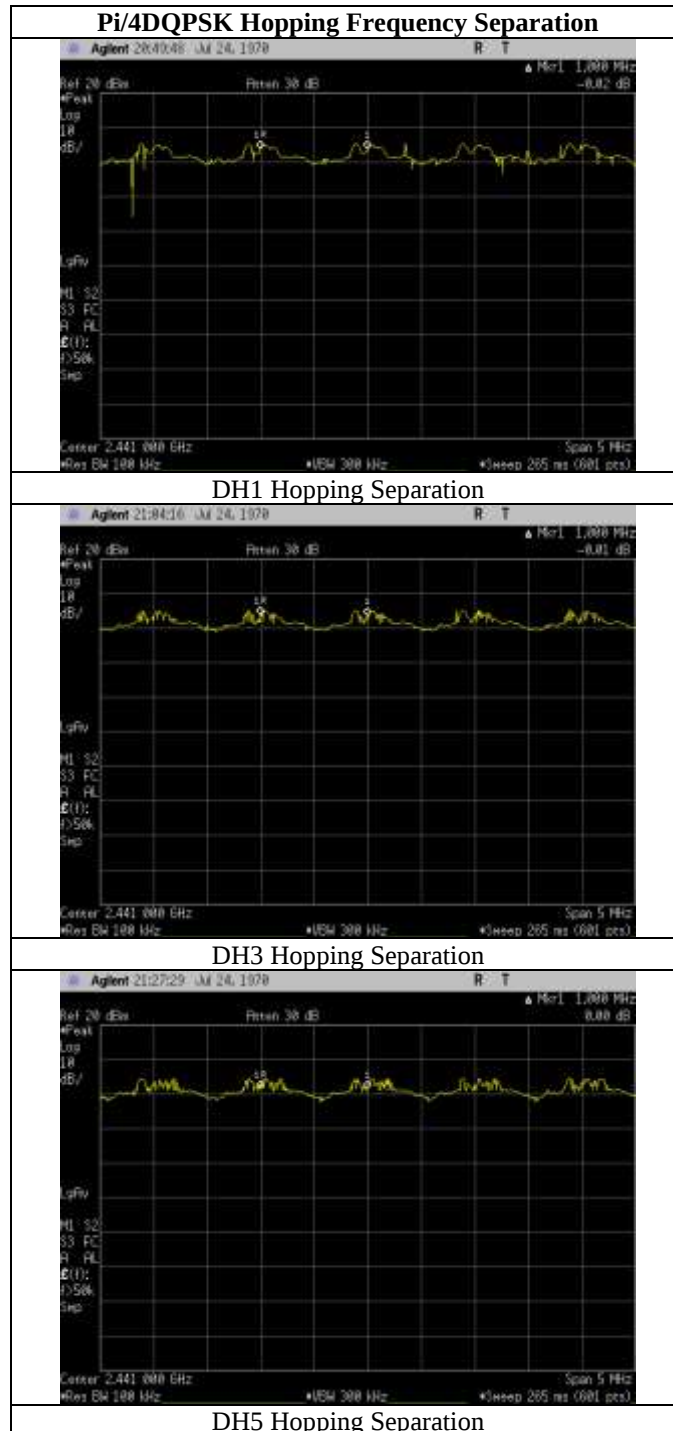

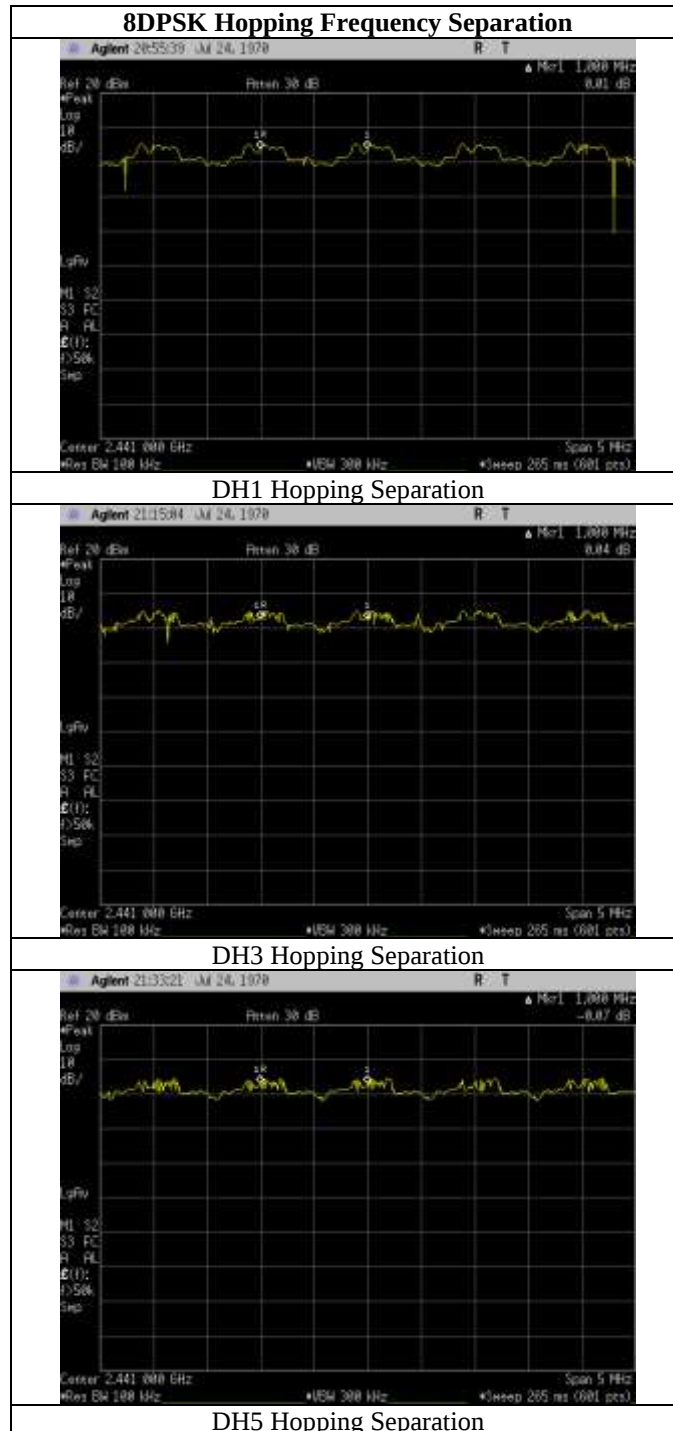

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(b) Peak Power Output

**Test Requirements:** §15.247(b): The maximum peak output power of the intentional radiator shall not exceed the following:

| Digital Transmission Systems<br>(MHz) | Output Limit<br>(Watts) |
|---------------------------------------|-------------------------|
| 902-928                               | 1.000                   |
| 2400-2483.5                           | 1.000                   |
| 5725- 5850                            | 1.000                   |

**Table 15. Output Power Requirements from §15.247(b)**

**§15.247(c):** if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in the Table 15, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400 – 2483.5 MHz band and using a point to point application may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Fixed, point-to-point operation excludes the use of point-to-multipoint systems, Omni-directional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

**Test Procedure:** The transmitter was connected to a calibrated spectrum analyzer. The analyzer reference level was offset by cable loss connecting to the test sample. The peak power was measured at the low, mid and high channels of each band at the maximum power level.

**Test Results:** The EUT was compliant with the Peak Power Output limits of §15.247(b).

**Test Engineer(s):** Bryan Taylor

**Test Date(s):** 5/3/2022




**Figure 4. Peak Power Output Test Setup**


## Peak Power Output Test Results


| 2.4GHz FHSS FCC PWR       | Port 1<br>(mW) | Port 1<br>(dBm) | Limit<br>(dBm) | Margin dB |
|---------------------------|----------------|-----------------|----------------|-----------|
| Low Ch_2441MHz_GFSK       | 4.1096         | 6.14            | 30             | 23.86     |
| Mid Ch_2441MHz_GFSK       | 5.0559         | 7.04            | 30             | 22.96     |
| High Ch_2480MHz_GFSK      | 3.6325         | 5.60            | 30             | 24.40     |
| Low Ch_2402MHz_Pi_4DQPSK  | 3.8115         | 5.81            | 30             | 24.19     |
| Mid Ch_2441MHz_Pi_4DQPSK  | 4.6559         | 6.68            | 30             | 23.32     |
| High Ch_2480MHz_Pi_4DQPSK | 3.3791         | 5.29            | 30             | 24.71     |
| Low Ch_2402MHz_8DPSK      | 4.0917         | 6.12            | 30             | 23.88     |
| Mid Ch_2441MHz_8DPSK      | 4.9797         | 6.97            | 30             | 23.03     |
| High Ch_2480MHz_8DPSK     | 3.5843         | 5.54            | 30             | 24.46     |

**Table 16. Peak Power Output, Test Results**

## Peak Power Output Test Results

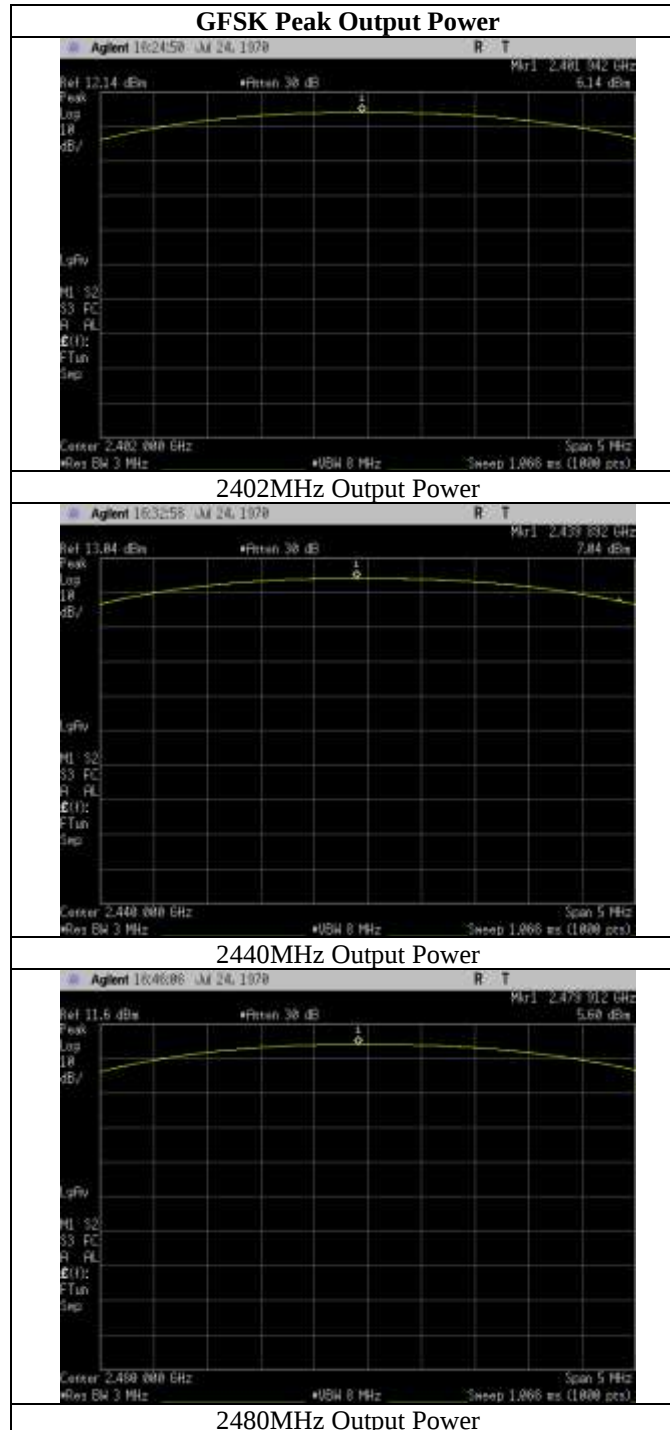

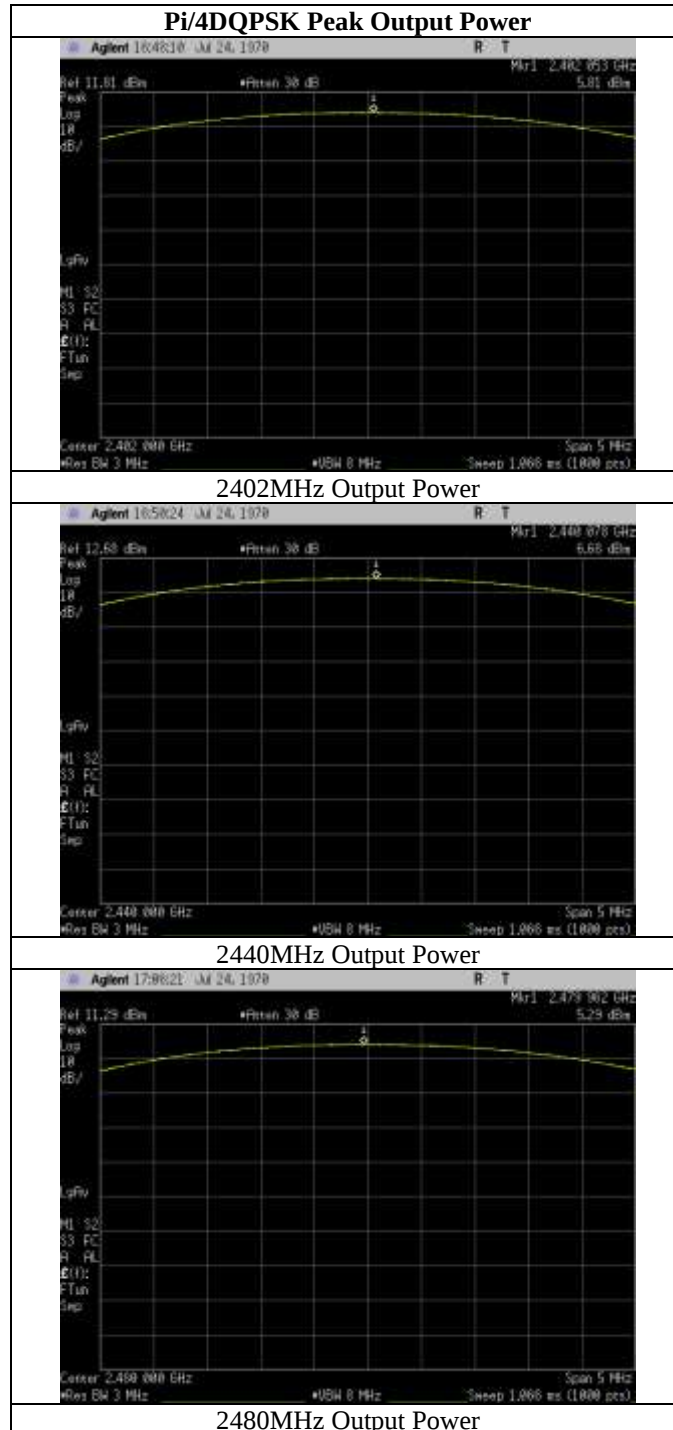

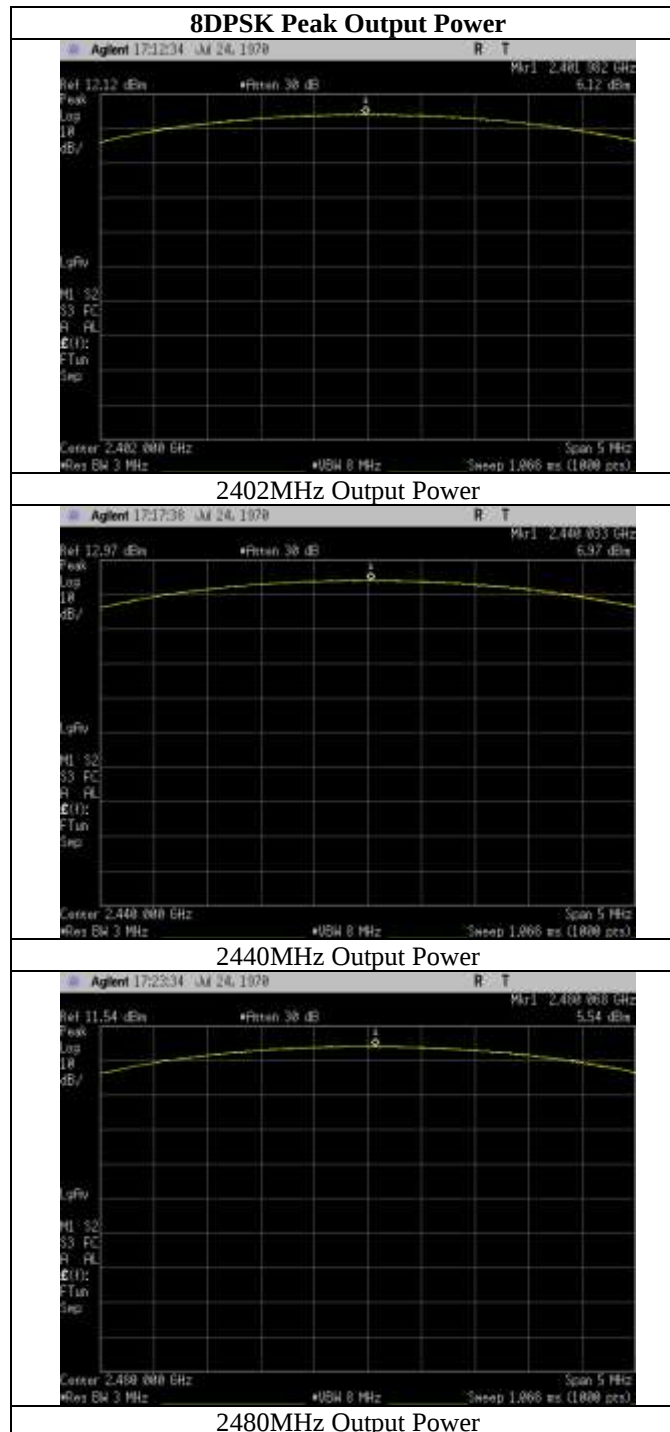

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(d) Radiated Spurious Emissions Requirements and Band Edge

**Test Requirements:** §15.247(d); §15.205: Emissions outside the frequency band.

**§15.247(d):** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

**§15.205(a):** Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                           | MHz                 | MHz             | GHz              |
|-------------------------------|---------------------|-----------------|------------------|
| 0.090–0.110-----              | 16.42–16.423        | 399.9–410       | 4.5–5.15         |
| <sup>1</sup> 0.495–0.505----- | 16.69475–16.69525   | 608–614         | 5.35–5.46        |
| 2.1735–2.1905-----            | 16.80425–16.80475   | 960–1240        | 7.25–7.75        |
| 4.125–4.128-----              | 25.5–25.67          | 1300–1427       | 8.025–8.5        |
| 4.17725–4.17775-----          | 37.5–38.25          | 1435–1626.5     | 9.0–9.2          |
| 4.20725–4.20775-----          | 73–74.6             | 1645.5–1646.5   | 9.3–9.5          |
| 6.215–6.218-----              | 74.8–75.2           | 1660–1710       | 10.6–12.7        |
| 6.26775–6.26825-----          | 108–121.94          | 1718.8–1722.2   | 13.25–13.4       |
| 6.31175–6.31225-----          | 123–138             | 2200–2300       | 14.47–14.5       |
| 8.291–8.294-----              | 149.9–150.05        | 2310–2390       | 15.35–16.2       |
| 8.362–8.366-----              | 156.52475–156.52525 | 2483.5–2500     | 17.7–21.4        |
| 8.37625–8.38675-----          | 156.7–156.9         | 2655–2900       | 22.01–23.12      |
| 8.41425–8.41475-----          | 162.0125–167.17     | 3260–3267       | 23.6–24.0        |
| 12.29–12.293-----             | 167.72–173.2        | 3332–3339       | 31.2–31.8        |
| 12.51975–12.52025-----        | 240–285             | 3345.8–3358 36. | 43–36.5          |
| 12.57675–12.57725-----        | 322–335.4           | 3600–4400       | ( <sup>2</sup> ) |

**Table 17. Restricted Bands of Operation**

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490 – 0.510 MHz.

<sup>2</sup> Above 38.6

**Test Requirement(s):** § 15.209 (a): Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in Table 18.

| Frequency (MHz) | § 15.209(a), Radiated Emission Limits<br>(dBμV) @ 3m |
|-----------------|------------------------------------------------------|
| 30 - 88         | 40.00                                                |
| 88 - 216        | 43.50                                                |
| 216 - 960       | 46.00                                                |
| Above 960       | 54.00                                                |

**Table 18. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)**

**Test Procedures:** The antenna-port methodology from ANSI C63.10: 2013 Section 11.12.2 was utilized as an alternative to radiated emissions in the restricted bands.

The transmitter was connected directly to a Spectrum Analyzer through an attenuator. The power level was set to the maximum level. For frequencies below 1GHz, the RBW was set to 100 kHz and the VBW was set to 3x the RBW. For frequencies above 1GHz the RBW was set to 1MHz and the VBW was set to 3x the RBW. The spectrum analyzer was set to an auto sweep time and a peak detector was used. The maximum antenna gain was added to the measurement trace as was the appropriate maximum ground reflection factor as outlined in section 11.12.2 of ANSI C63.10. The resultant EIRP was then converted to an equivalent electric field strength which is shown on the graphical plots which follow. Measurements were carried out at the low, mid and high channels.

In order to assess the cabinet radiated spurious emissions, a radiated scan was performed with the antenna of proper impedance installed. The transmitter was turned on. Measurements were performed of the low, mid and high Channels. The EUT was rotated orthogonally through all three axes if multiple mounting orientations are supported. Plots shown are corrected for both antenna correction factor and distance and compared to a 3 m limit line.

Radiated measurements below 30MHz were performed in a semi-anechoic chamber that has been correlated to an open area site.


**Test Results:** The EUT was compliant with the Radiated Spurious Emission limits of § 15.247(d).

Note: The antenna gain specification sheet indicated a worst case gain of 4.09dBi. During the testing the scans were performed with either 4dBi for the gain or the default 2dBi from ANSI C63.10. Due to the high margin on the plots the additional gain in all cases still demonstrates a passing result.

**Test Engineer(s):** Bryan Taylor, James Seib

**Test Date(s):** 5/3/2022 – 5/18/2022


## Radiated Spurious Emissions Test Results

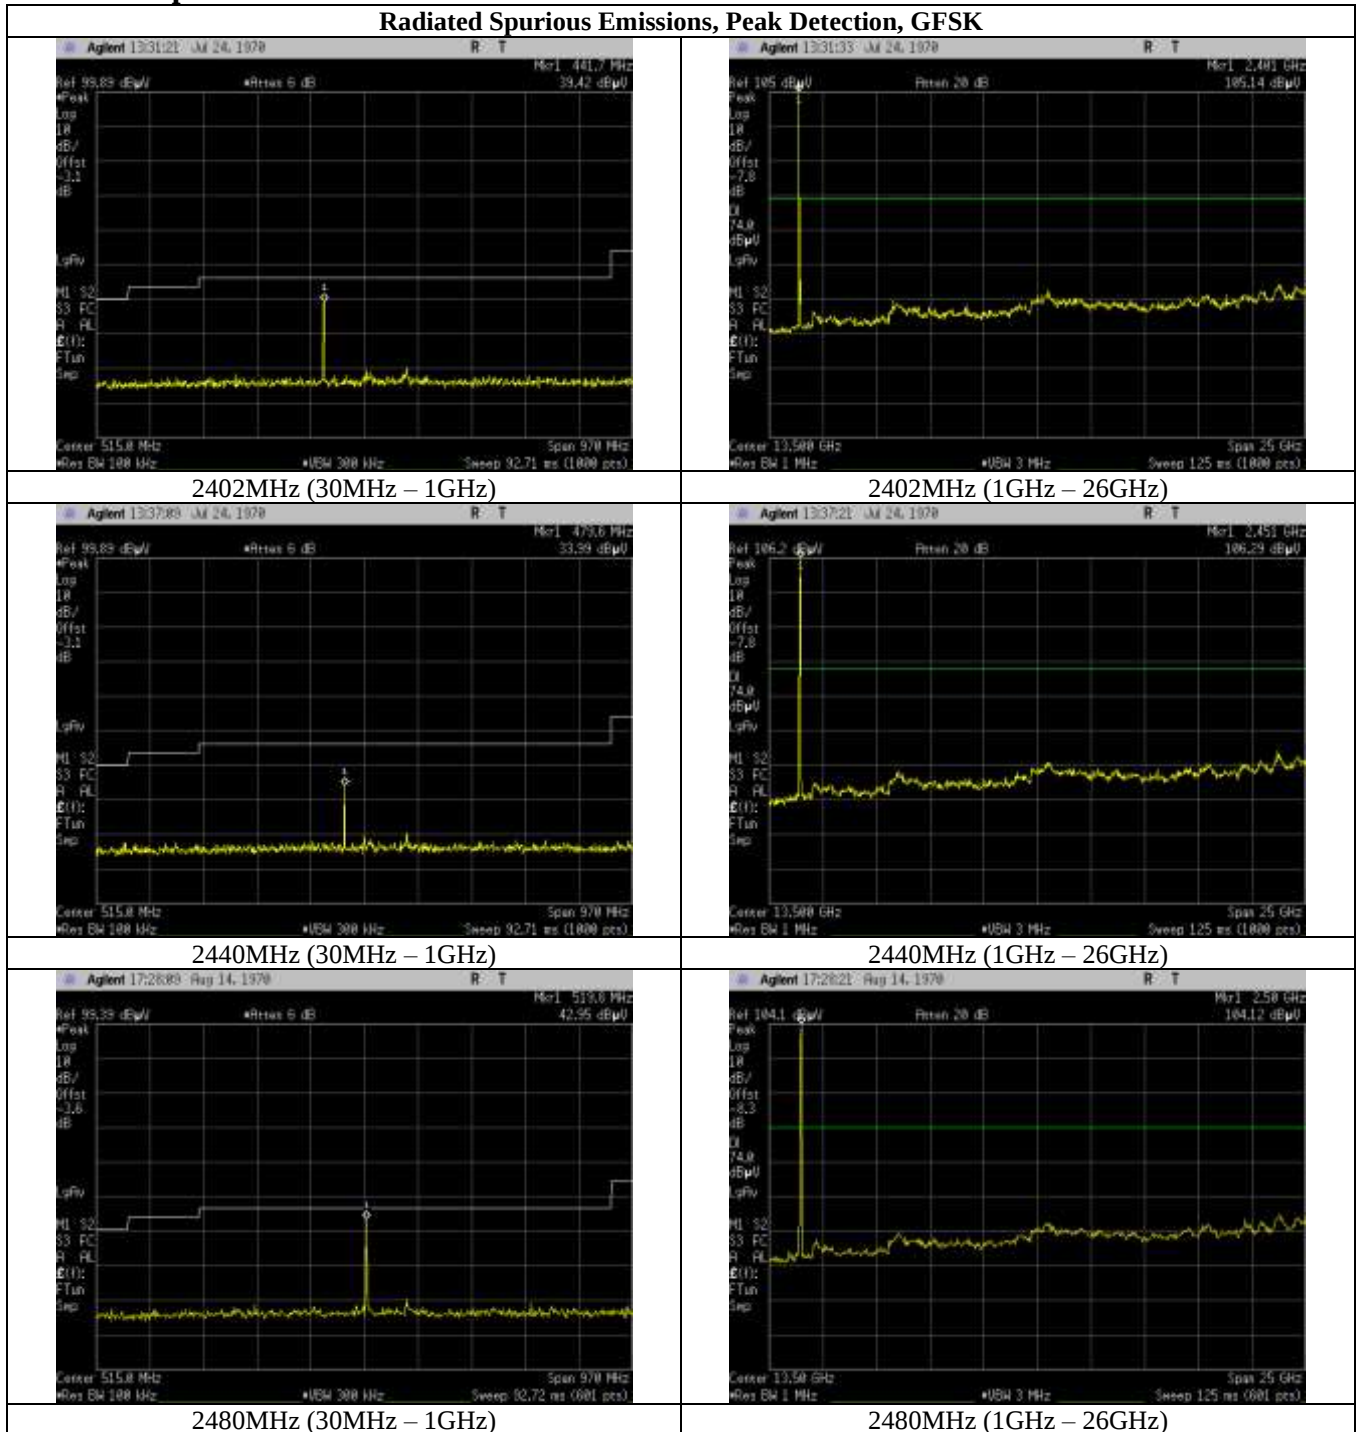

**Radiated Spurious Emissions, Average Detection, GFSK**



2402MHz (1GHz – 26GHz)

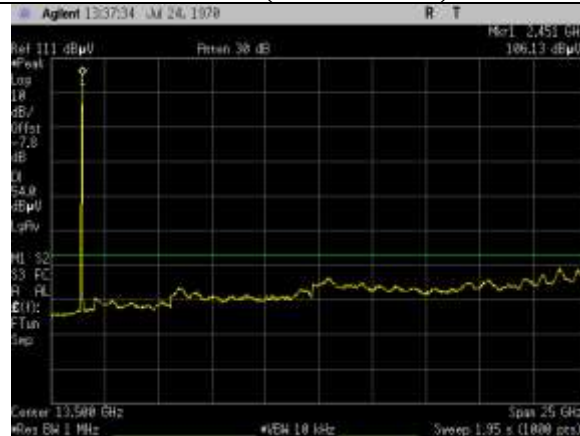


2440MHz (1GHz – 26GHz)



2480MHz (1GHz – 26GHz)


**Radiated Spurious Emissions, Peak Detection, Pi/4DQPSK**

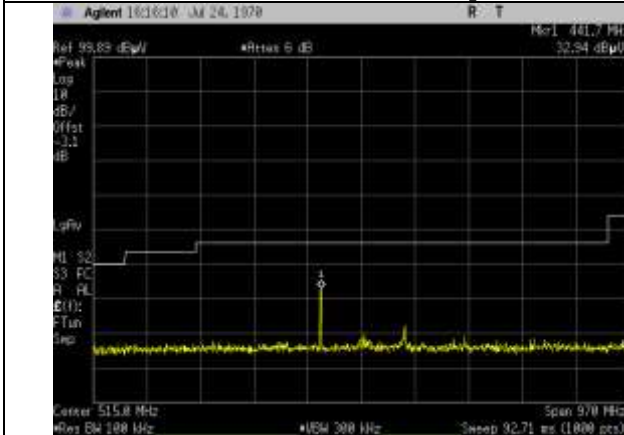


2402MHz (30MHz – 1GHz)




2402MHz (30MHz – 1GHz)

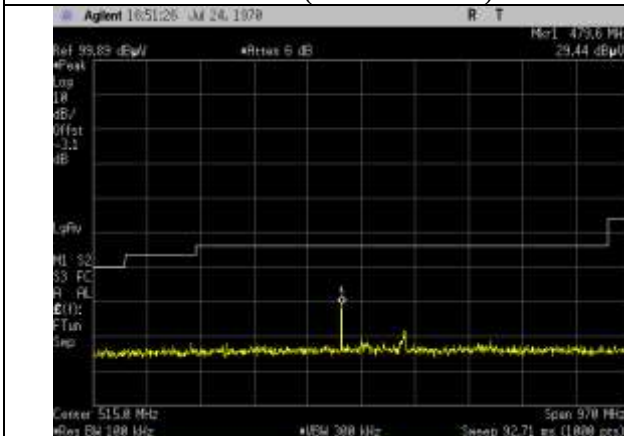

2440MHz (30MHz – 1GHz)

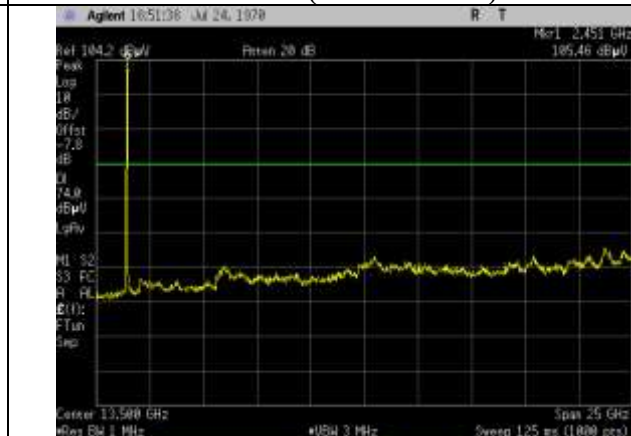

2440MHz (30MHz – 1GHz)

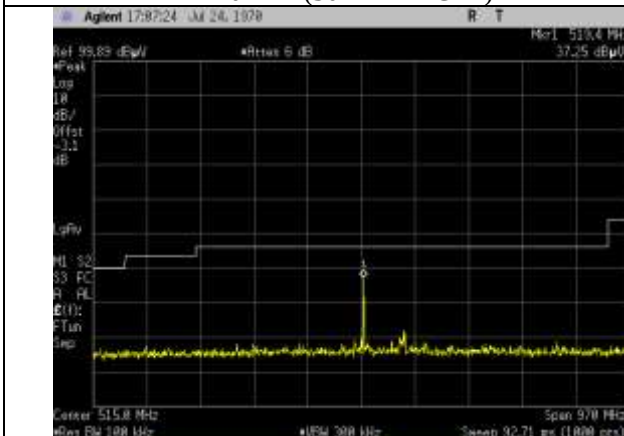

2480MHz (30MHz – 1GHz)




2480MHz (30MHz – 1GHz)

**Radiated Spurious Emissions, Average Detection,  
Pi/4DQPSK**



2402MHz (1GHz – 26GHz)

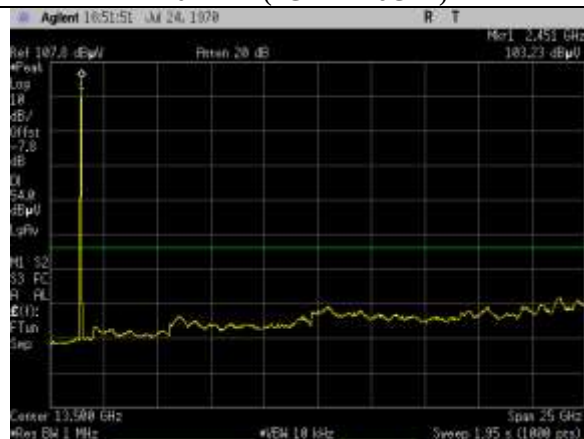


2440MHz (1GHz – 26GHz)



2480MHz (1GHz – 26GHz)


**Radiated Spurious Emissions, Peak Detection, 8DPSK**

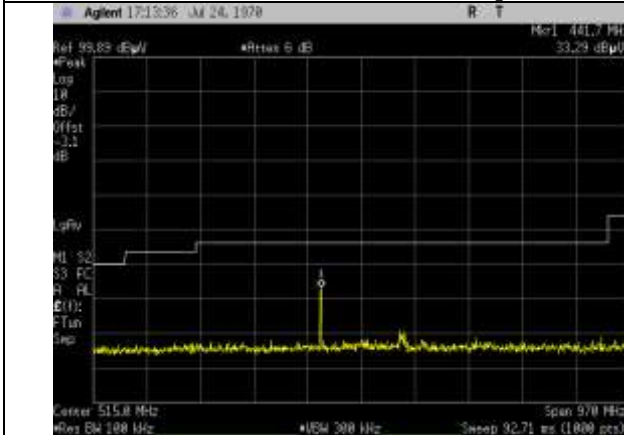

2402MHz (30MHz – 1GHz)




2402MHz (30MHz – 1GHz)

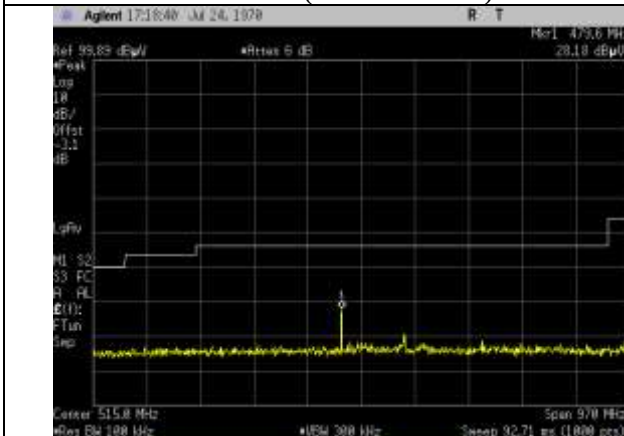

2440MHz (30MHz – 1GHz)



2440MHz (30MHz – 1GHz)

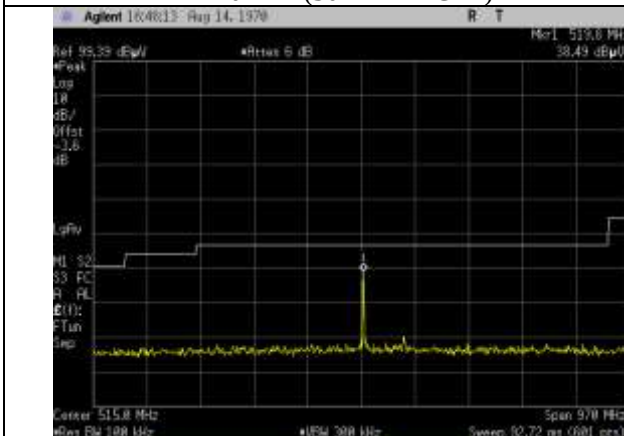


2480MHz (30MHz – 1GHz)



2480MHz (30MHz – 1GHz)


**Radiated Spurious Emissions, Average Detection,  
8DPSK**

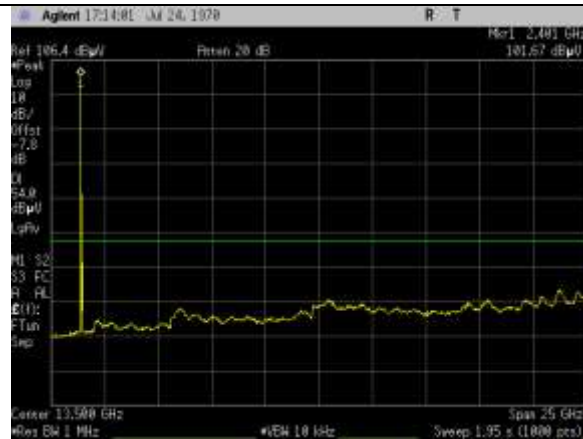

2402MHz (1GHz – 26GHz)




2440MHz (1GHz – 26GHz)

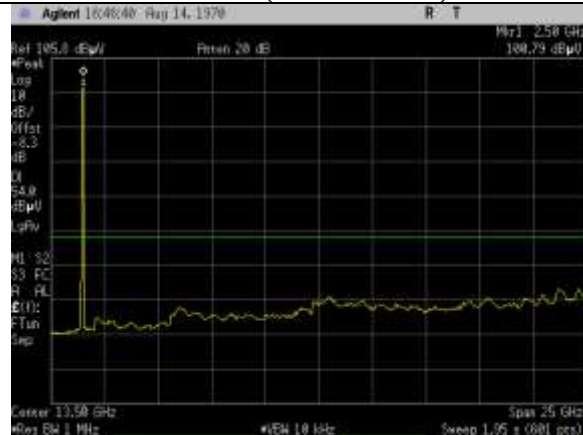


2480MHz (1GHz – 26GHz)


## Radiated Spurious Emissions, Restricted Band Edge, Peak Detection

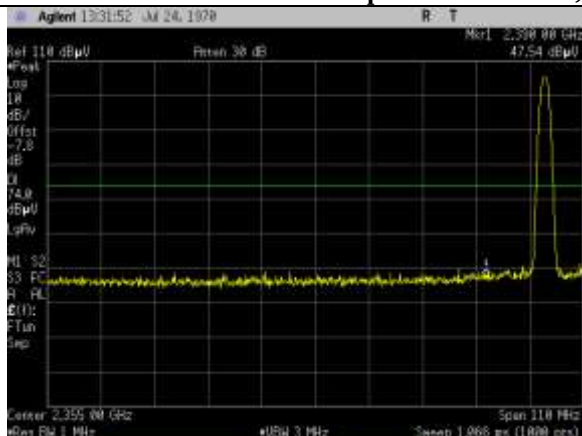


2402MHz, Lower Band Edge, GFSK

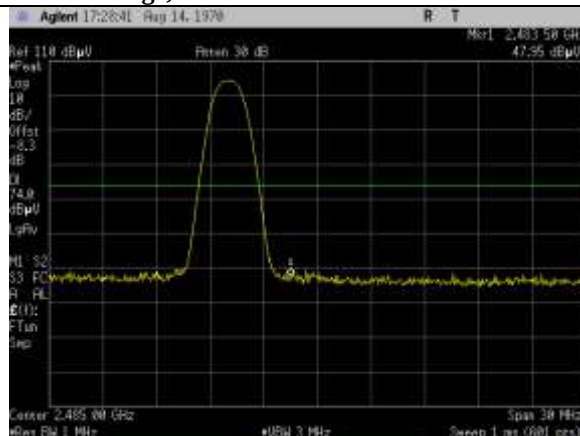


2480MHz, Upper Band Edge, GFSK

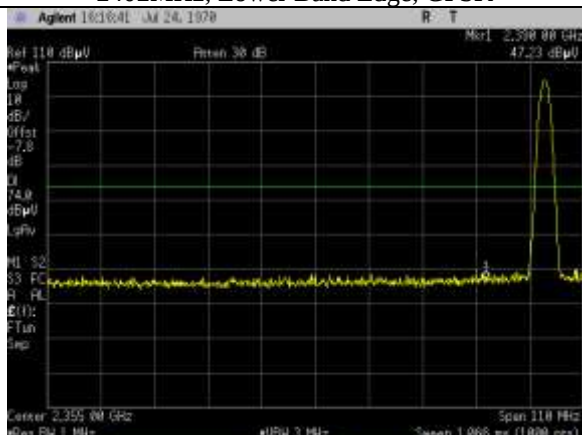


2402MHz, Lower Band Edge, Pi/4DQPSK

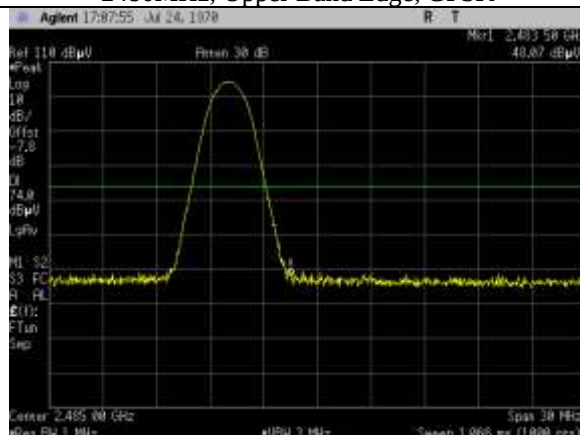

2480MHz, Upper Band Edge, Pi/4DQPSK

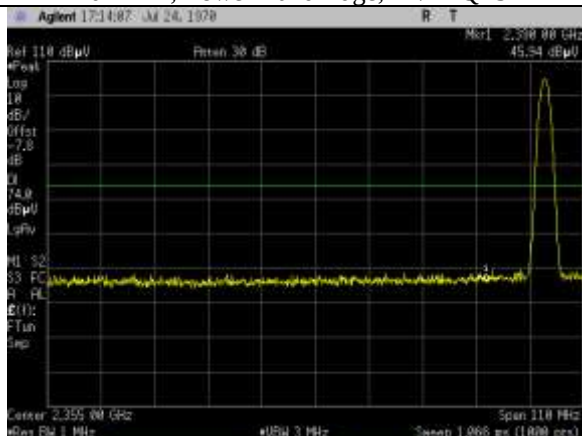


2402MHz, Lower Band Edge, 8DPSK

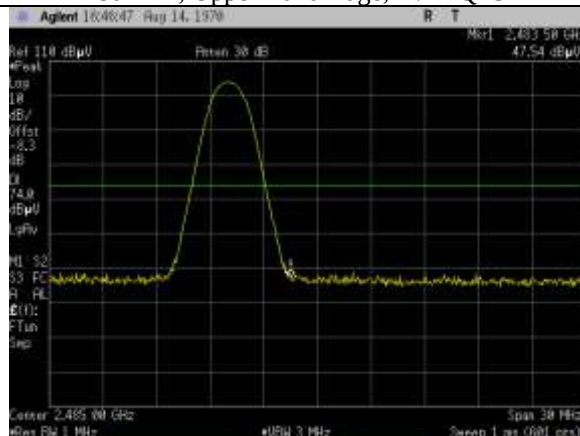


2480MHz, Upper Band Edge, 8DPSK


**Radiated Spurious Emissions, Restricted Band Edge, Average Detection**

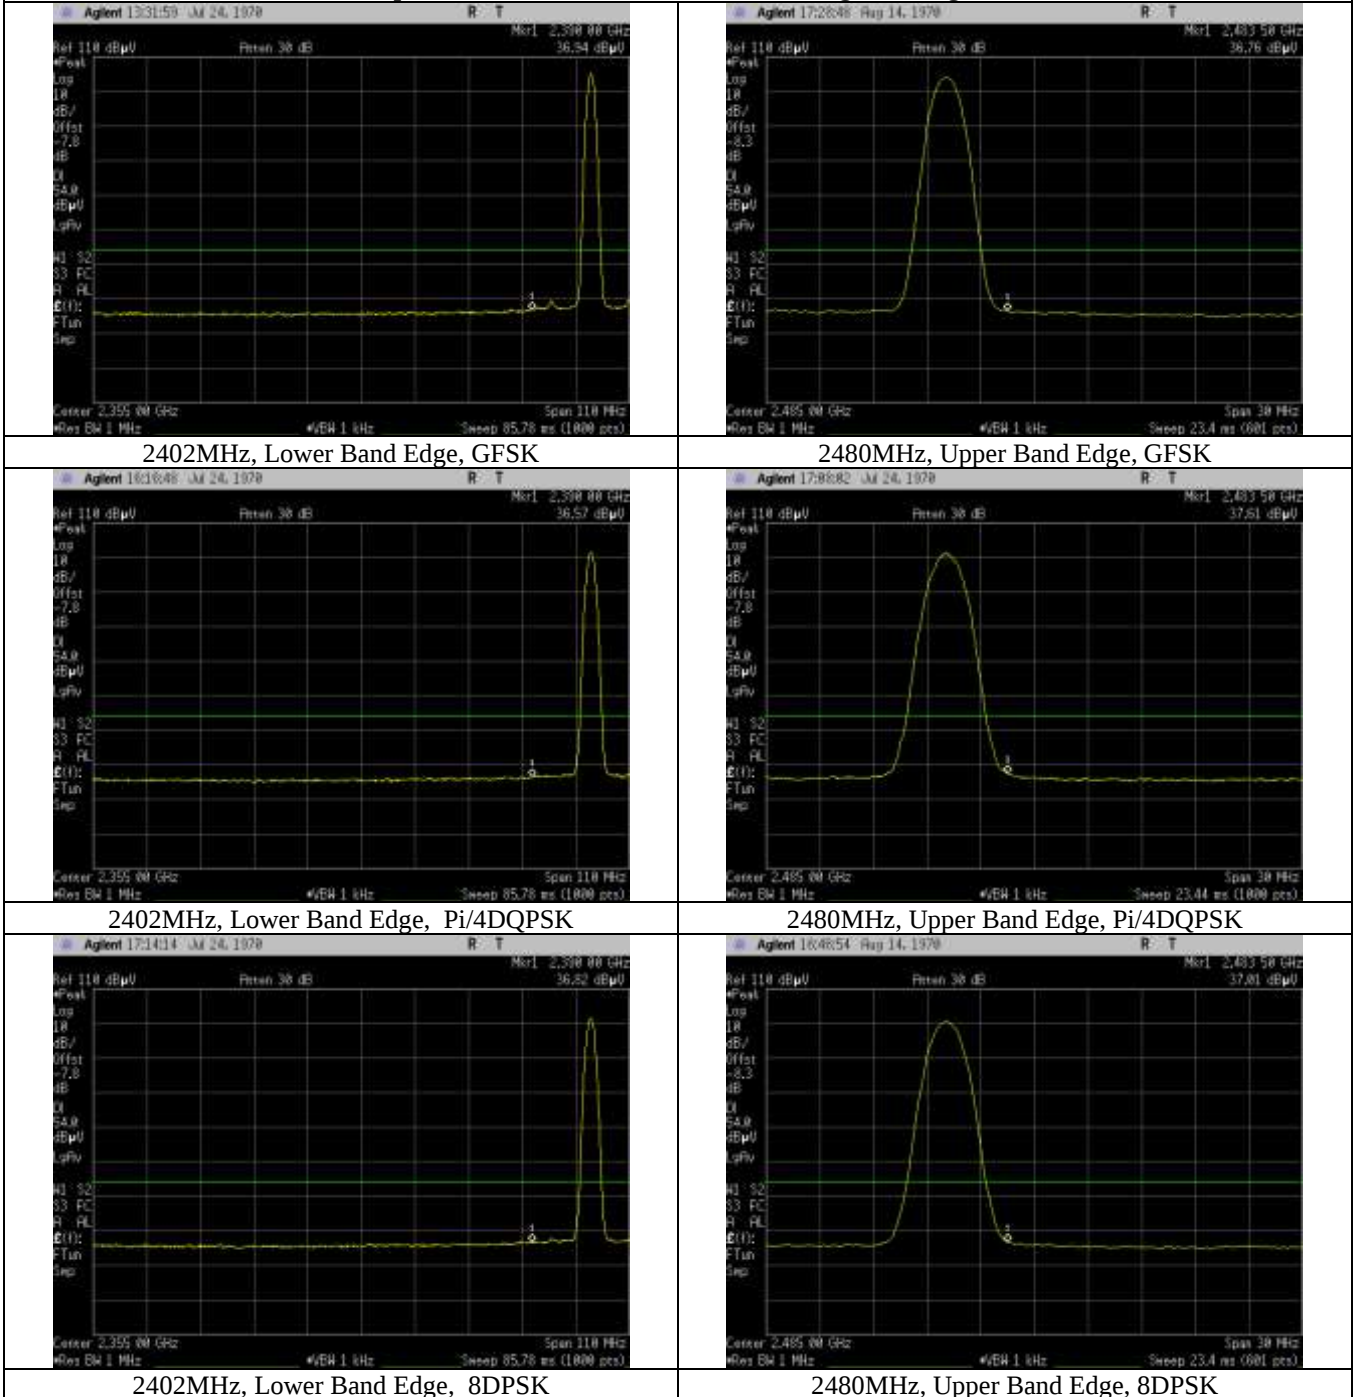


### Cabinet Radiated Emissions, Peak Detection, GFSK

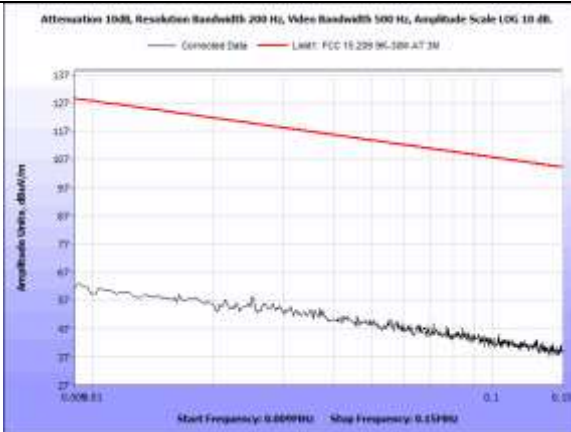


9kHz – 150kHz, Coplanar Loop

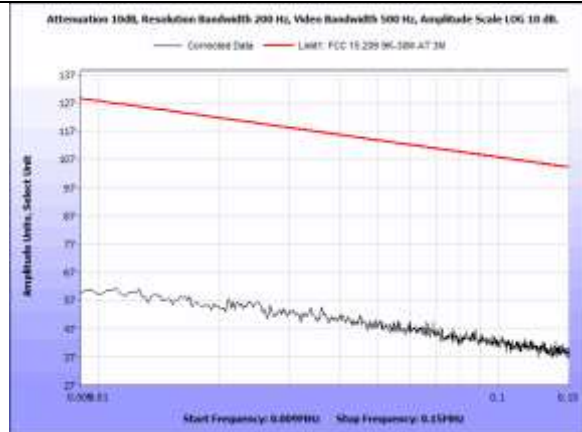


9kHz – 150kHz, Coaxial Loop

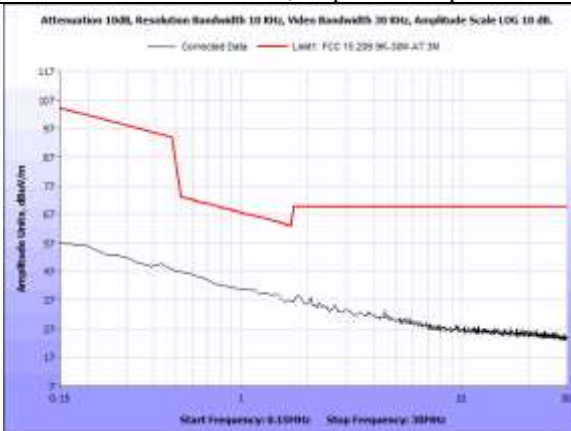


150kHz – 30MHz, Coplanar Loop

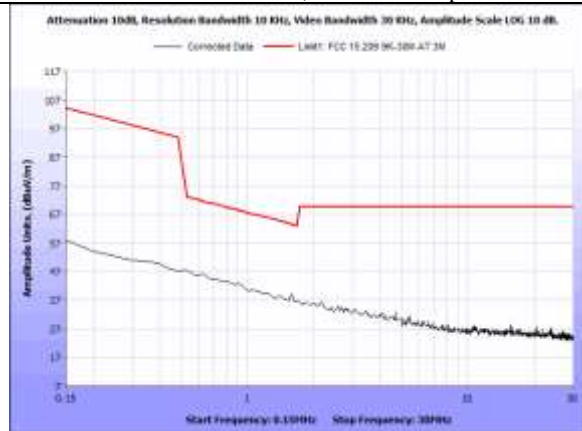

150kHz – 30MHz, Coaxial Loop


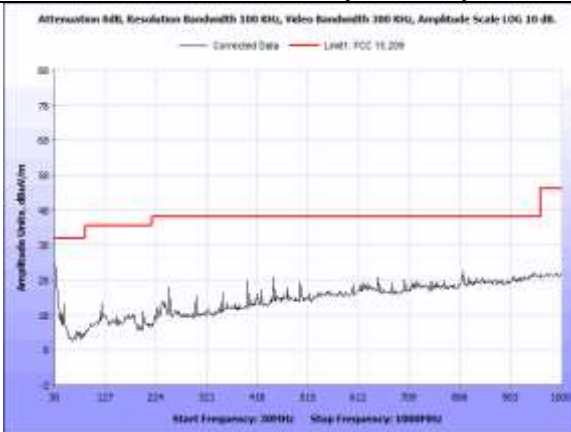


30MHz -1GHz, Vertical

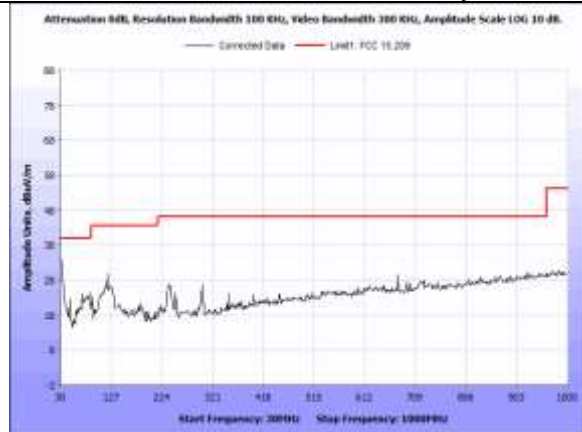



30MHz – 1GHz, Horizontal

### Cabinet Radiated Emissions, Peak Detection, Pi/4DQPSK

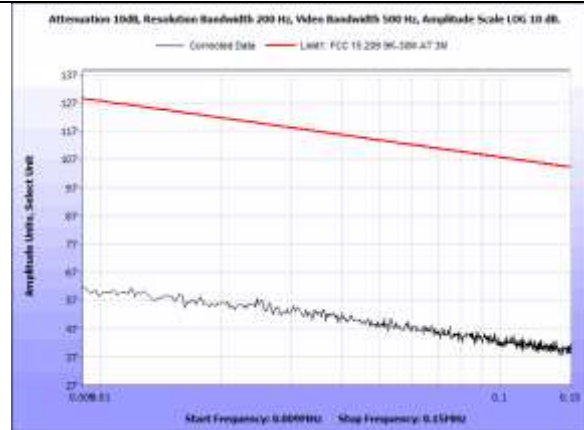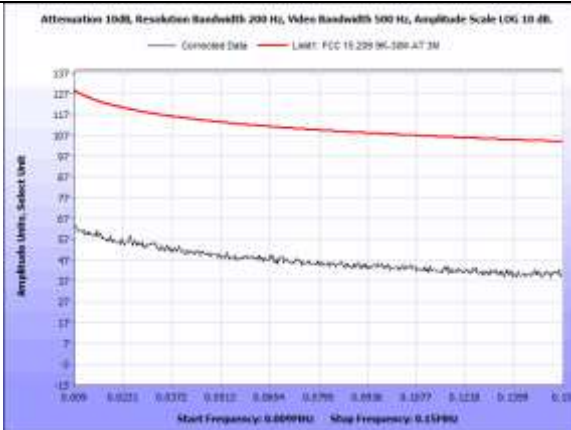



9kHz – 150kHz, Coplanar Loop

9kHz – 150kHz, Coaxial Loop

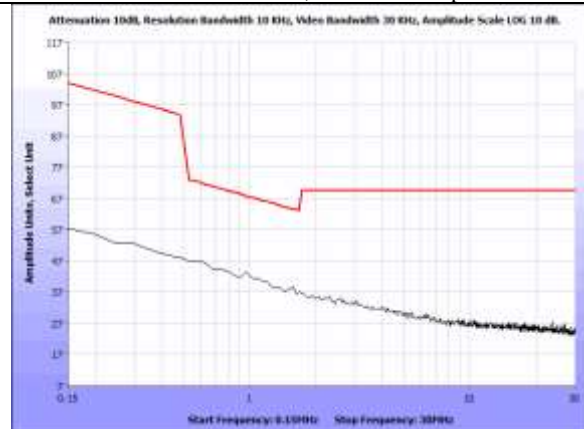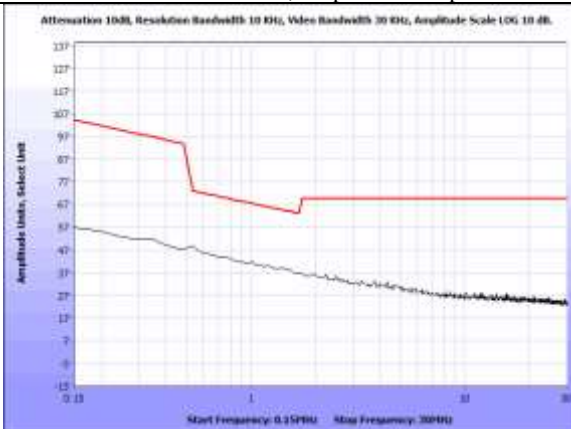

150kHz – 30MHz, Coplanar Loop



150kHz – 30MHz, Coaxial Loop

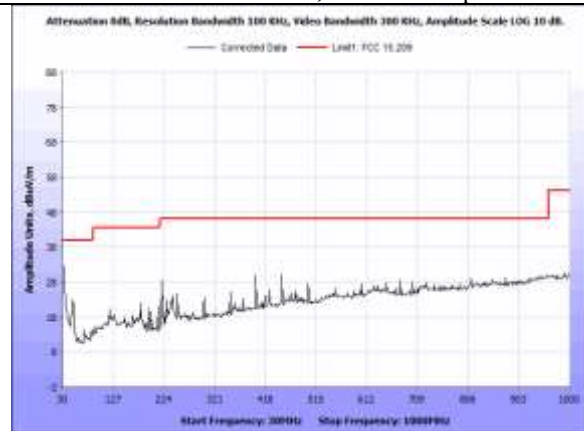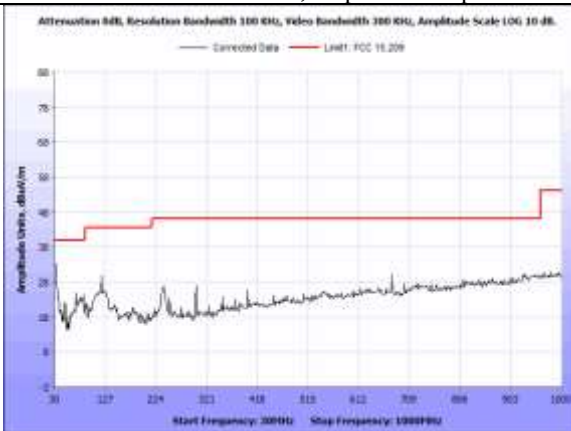

30MHz -1GHz, Vertical



30MHz – 1GHz, Horizontal

### Cabinet Radiated Emissions, Peak Detection, 8DPSK

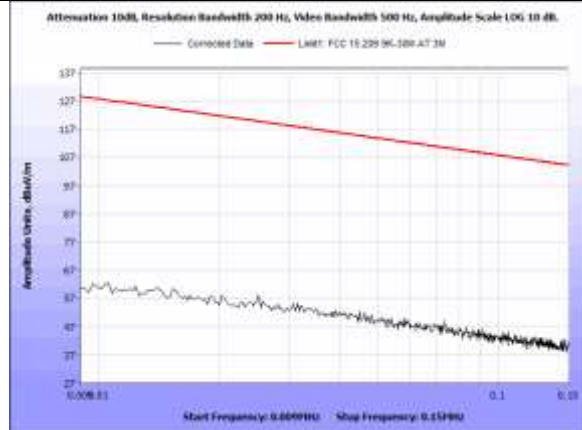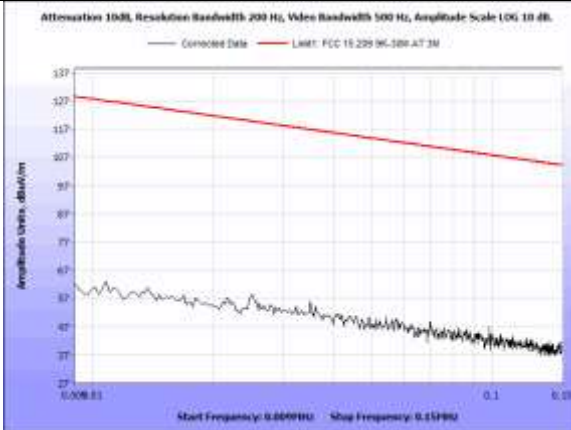



9kHz – 150kHz, Coplanar Loop

9kHz – 150kHz, Coaxial Loop

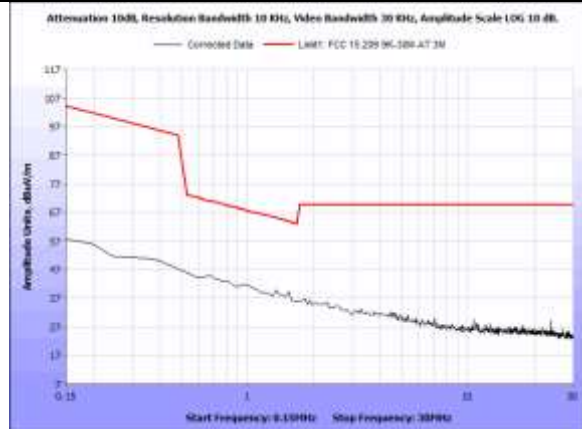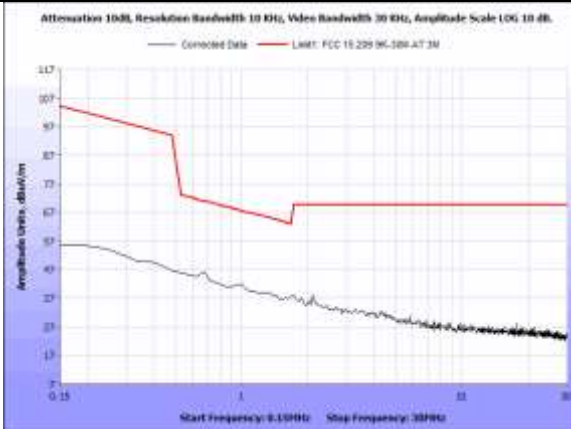

150kHz – 30MHz, Coplanar Loop

150kHz – 30MHz, Coaxial Loop

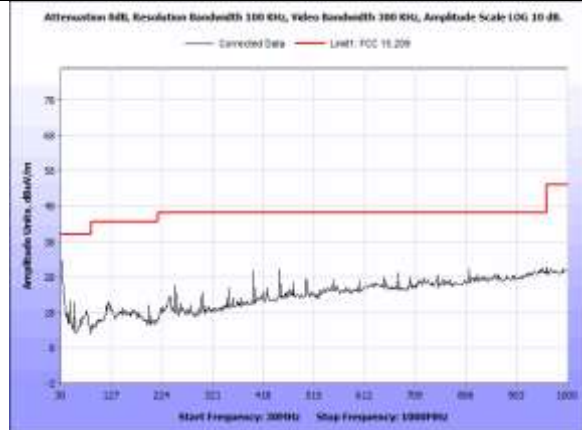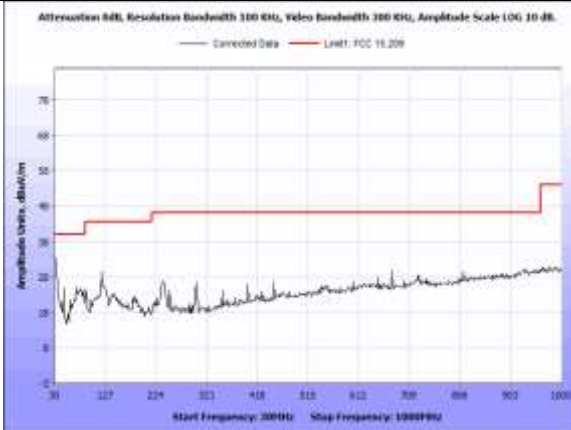


30MHz -1GHz, Vertical

30MHz – 1GHz, Horizontal

### Cabinet Radiated Emissions, Peak Detection




1-18GHz, Vertical (GFSK)

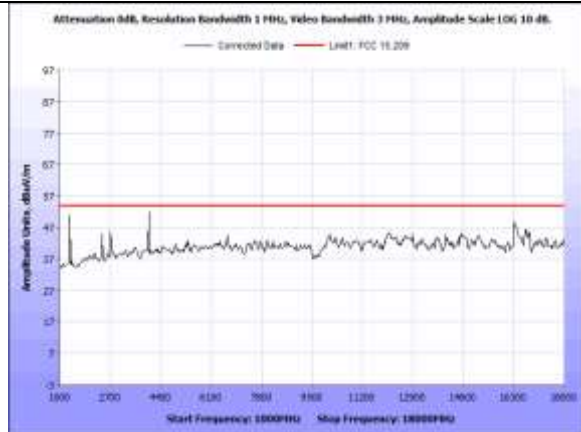


1-18GHz, Horizontal (GFSK)



1-18GHz, Vertical (Pi/4DQPSK)

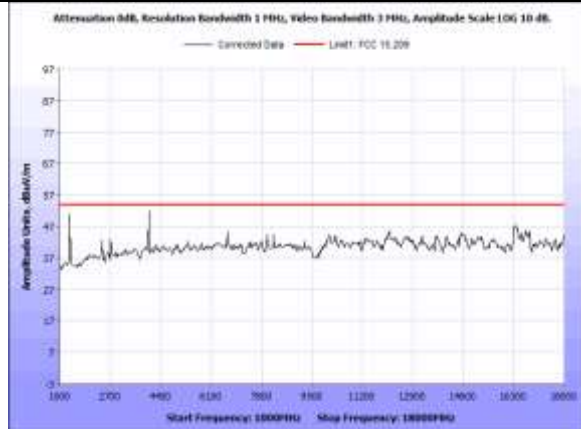

1-18GHz, Horizontal (Pi/4DQPSK)

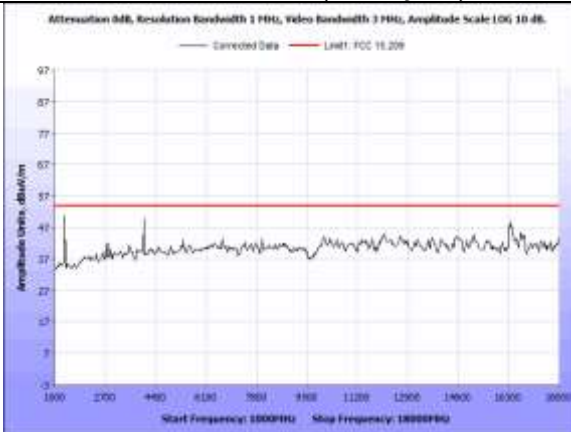

1-18GHz, Vertical (8DPSK)



1-18GHz, Horizontal (8DPSK)

**Worst Case Cabinet Spurious Emissions (Horizontal Polarity)**

| Frequency (Hz) | Meter Reading (dBUV) | RBW (Hz) | Antenna Factor (dBUV) | Cable Factor (dB) | Preamp Factor (dB) | Corrected Measurement dBUV/m | Limit 1, FCC 15.209 dBUV/m | Margin 1 (dB) |
|----------------|----------------------|----------|-----------------------|-------------------|--------------------|------------------------------|----------------------------|---------------|
| 30.0E+06       | 33.94                | 100000   | 22.8                  | 1.16              | -25.16             | 32.74                        | 40                         | -7.26         |
| 120.1603E+06   | 27.6                 | 100000   | 16.4                  | 2.31              | -25.14             | 21.17                        | 43.5                       | -22.33        |
| 249.1827E+06   | 31.21                | 100000   | 16.42                 | 3.37              | -25.07             | 25.92                        | 46                         | -20.08        |
| 399.9679E+06   | 28.78                | 100000   | 19.9                  | 4.3               | -25.25             | 27.73                        | 46                         | -18.27        |
| 449.7115E+06   | 28.41                | 100000   | 20.8                  | 4.66              | -25.08             | 28.79                        | 46                         | -17.21        |
| 1.3269E+09     | 51.35                | 1000000  | 28.79                 | 2.23              | -31.32             | 51.05                        | 54                         | -2.95         |
| 2.7163E+09     | 48.81                | 1000000  | 32.28                 | 3.69              | -38.82             | 45.97                        | 54                         | -8.03         |
| 3.9968E+09     | 56.28                | 1000000  | 32.98                 | 5.18              | -42.41             | 52.02                        | 54                         | -1.98         |
| 16.3381E+09    | 49.11                | 1000000  | 40.5                  | 11.66             | -52.51             | 48.76                        | 54                         | -5.24         |
| 16.3654E+09    | 48.08                | 1000000  | 40.53                 | 11.69             | -52.54             | 47.76                        | 54                         | -6.24         |
| 16.3926E+09    | 47.57                | 1000000  | 40.57                 | 11.71             | -52.57             | 47.28                        | 54                         | -6.72         |
| 16.4199E+09    | 47.08                | 1000000  | 40.61                 | 11.78             | -52.99             | 46.48                        | 54                         | -7.52         |
| 16.4471E+09    | 46.62                | 1000000  | 40.66                 | 11.85             | -53.55             | 45.59                        | 54                         | -8.41         |
| 16.6923E+09    | 47.02                | 1000000  | 41.18                 | 11.48             | -53.5              | 46.19                        | 54                         | -7.81         |
| 16.7196E+09    | 47.54                | 1000000  | 41.23                 | 11.4              | -53.73             | 46.44                        | 54                         | -7.56         |
| 16.8285E+09    | 47.71                | 1000000  | 41.25                 | 11.16             | -54.57             | 45.55                        | 54                         | -8.45         |
| 19.5513E+09    | 29.08                | 1000000  | 44.55                 | 7.4               | -40.54             | 40.49                        | 54                         | -13.51        |
| 21.984E+09     | 27.43                | 1000000  | 45.16                 | 8.1               | -41.19             | 39.5                         | 54                         | -14.5         |
| 24.4167E+09    | 26.9                 | 1000000  | 45.33                 | 9.26              | -40.42             | 41.07                        | 54                         | -12.93        |
| 26.8494E+09    | 28.83                | 1000000  | 45.95                 | 10.28             | -42.63             | 42.42                        | 54                         | -11.58        |

**Worst Case Cabinet Spurious Emissions (Vertical Polarity)**

| Frequency (Hz) | Meter Reading (dBuV) | RBW (Hz) | Antenna Factor (dBuV) | Cable Factor (dB) | Preamp Factor (dB) | Corrected Measurement dBuV/m | Limit 1, FCC 15.209 dBuV/m | Margin 1 (dB) |
|----------------|----------------------|----------|-----------------------|-------------------|--------------------|------------------------------|----------------------------|---------------|
| 30.0E+06       | 35.89                | 100000   | 22.3                  | 1.16              | -25.16             | 34.19                        | 40                         | -5.81         |
| 120.1603E+06   | 36.69                | 100000   | 15.92                 | 2.31              | -25.14             | 29.78                        | 43.5                       | -13.72        |
| 235.1923E+06   | 32.7                 | 100000   | 15.62                 | 3.29              | -25.16             | 26.45                        | 46                         | -19.55        |
| 300.4808E+06   | 30.67                | 100000   | 17.6                  | 3.69              | -25.37             | 26.59                        | 46                         | -19.41        |
| 1.3269E+09     | 50.89                | 1000000  | 28.9                  | 2.23              | -31.32             | 50.7                         | 54                         | -3.3          |
| 3.9968E+09     | 55.64                | 1000000  | 33.18                 | 5.18              | -42.41             | 51.59                        | 54                         | -2.41         |
| 4.8958E+09     | 43.87                | 1000000  | 33.7                  | 5.58              | -42.44             | 40.72                        | 54                         | -13.28        |
| 7.3205E+09     | 44.74                | 1000000  | 35.39                 | 6.78              | -45.25             | 41.66                        | 54                         | -12.34        |
| 9.7724E+09     | 40.31                | 1000000  | 36.64                 | 7.99              | -46.55             | 38.39                        | 54                         | -15.61        |
| 12.1971E+09    | 45.52                | 1000000  | 38.64                 | 9.47              | -50.4              | 43.23                        | 54                         | -10.77        |
| 14.649E+09     | 43.23                | 1000000  | 39.07                 | 10.28             | -49                | 43.58                        | 54                         | -10.42        |
| 17.0737E+09    | 41.87                | 1000000  | 40.88                 | 11.57             | -53.76             | 40.56                        | 54                         | -13.44        |
| 19.5513E+09    | 29.02                | 1000000  | 44.43                 | 7.4               | -40.54             | 40.3                         | 54                         | -13.7         |
| 21.984E+09     | 27.4                 | 1000000  | 45.22                 | 8.1               | -41.19             | 39.54                        | 54                         | -14.46        |
| 24.4167E+09    | 27.4                 | 1000000  | 45.43                 | 9.26              | -40.42             | 41.67                        | 54                         | -12.33        |
| 26.8494E+09    | 28.82                | 1000000  | 45.95                 | 10.28             | -42.63             | 42.41                        | 54                         | -11.59        |

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(d) RF Conducted Spurious Emissions Requirements

**Test Requirement:** 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

**Test Procedure:** For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10<sup>th</sup> harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

The transmitter was connected directly to a Spectrum Analyzer through an attenuator. The power level was set to the maximum level. The RBW was set to 100 kHz. The VBW was set to 3x the RBW. The spectrum analyzer was set to an auto sweep time and a peak detector was used. Measurements were carried out at the low, mid and high channels.

See following pages for detailed test results with RF Conducted Spurious Emissions.

**Test Results:** The EUT was compliant with the Conducted Spurious Emission limits of §15.247(d).

**Test Engineer(s):** Bryan Taylor


**Test Date(s):** 5/3/2022




Figure 5. Block Diagram, Conducted Spurious Emissions Test Setup

## Conducted Spurious Emissions Test Results

### Conducted Spurious Emissions, Peak Detection, GFSK

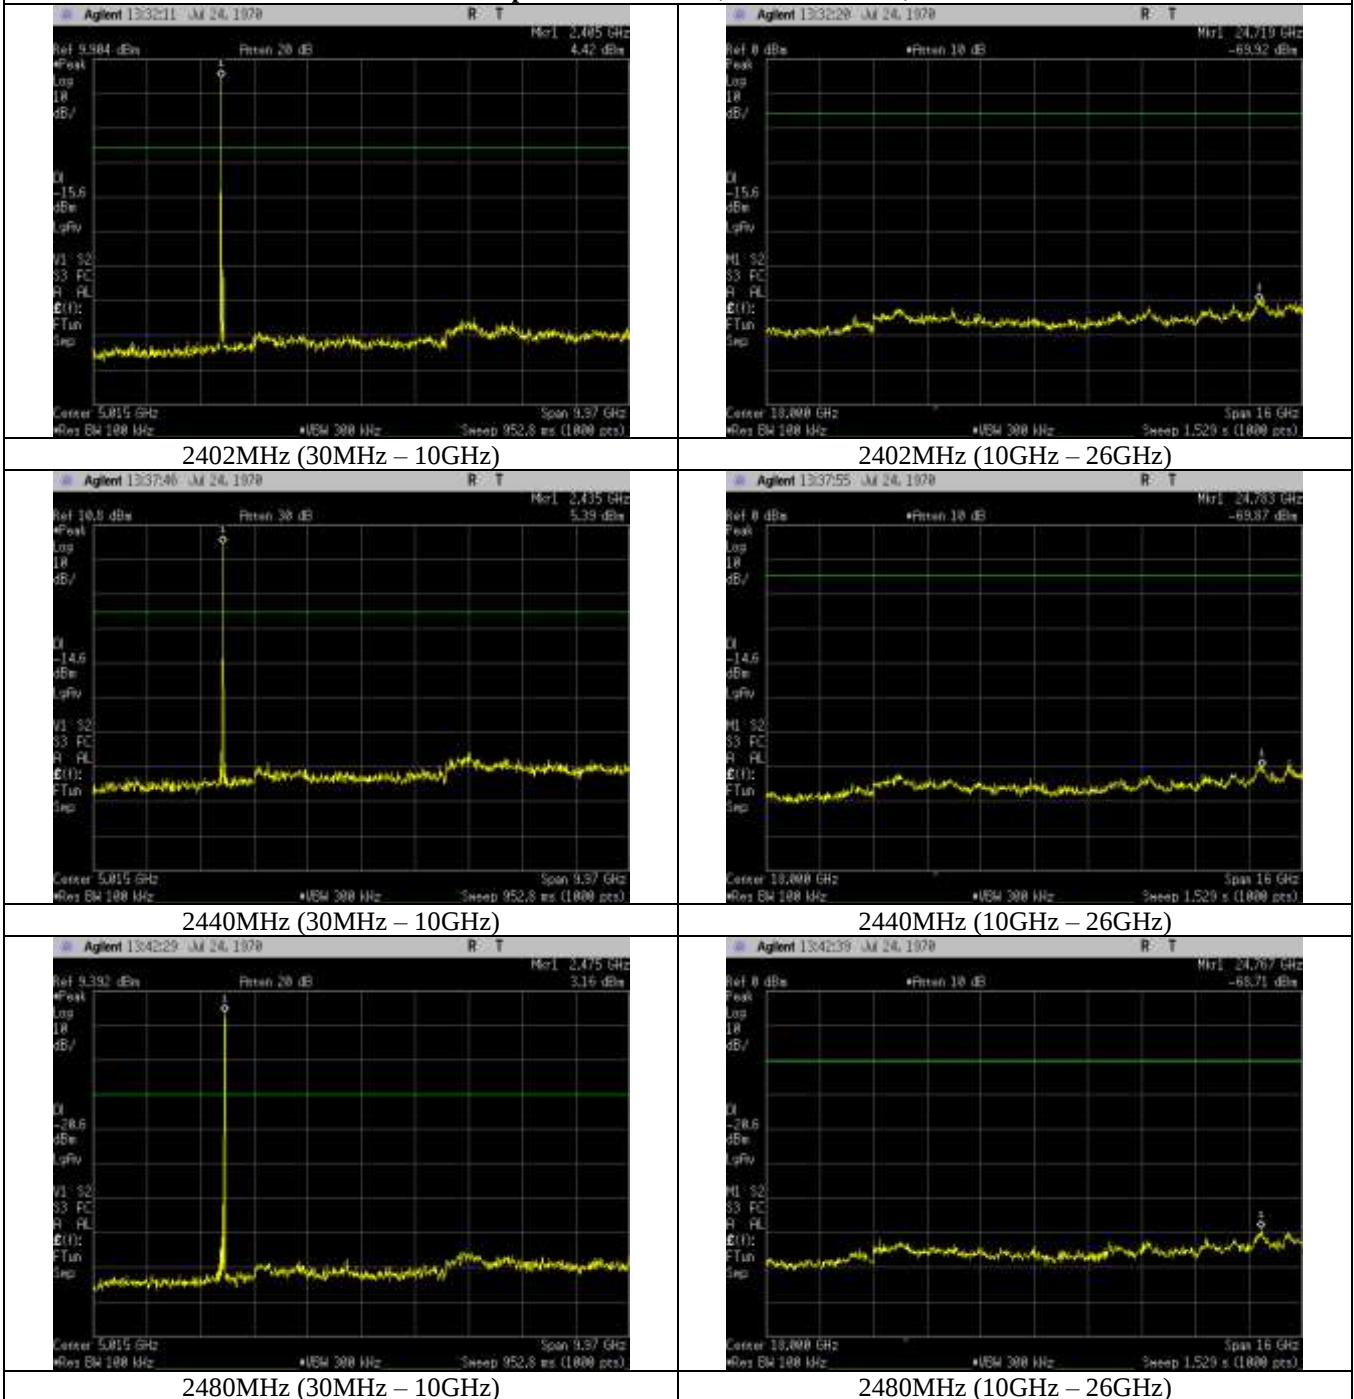

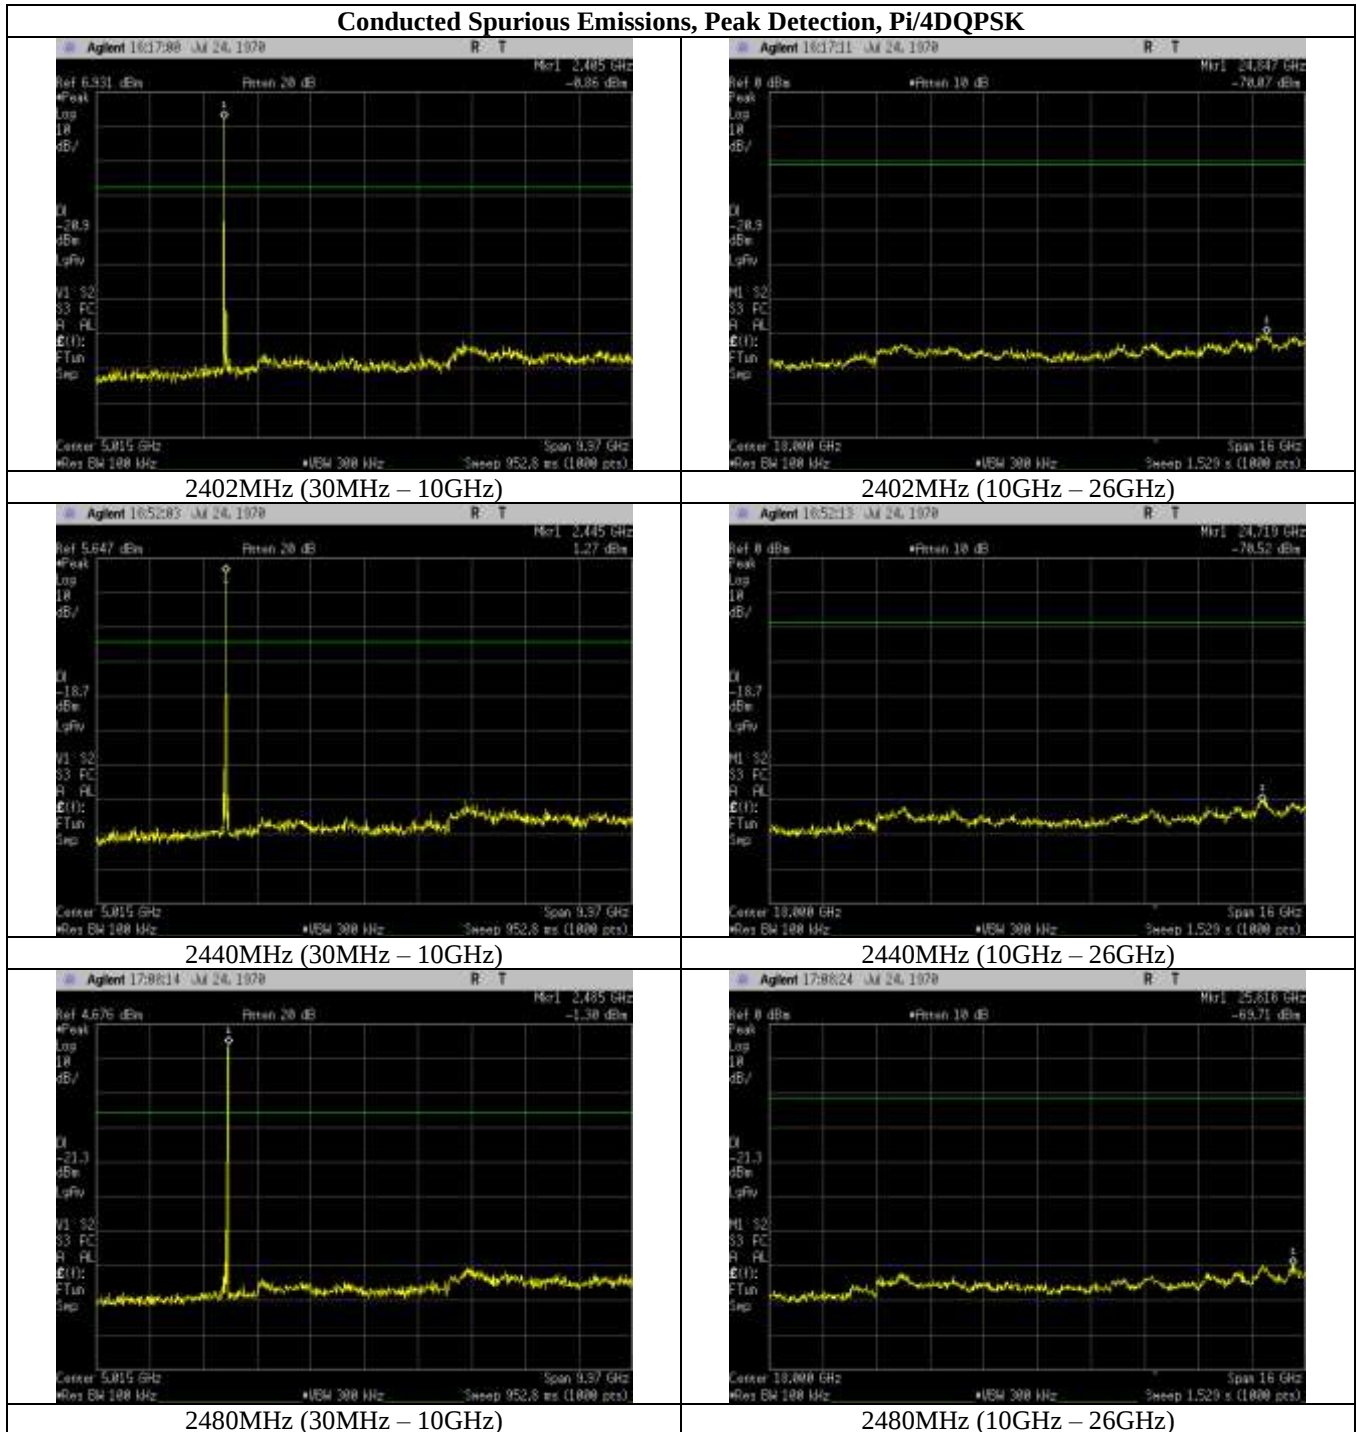


**Conducted Spurious Emissions, Peak Detection, 8DPSK**




2402MHz (30MHz – 10GHz)




2402MHz (10GHz – 26GHz)

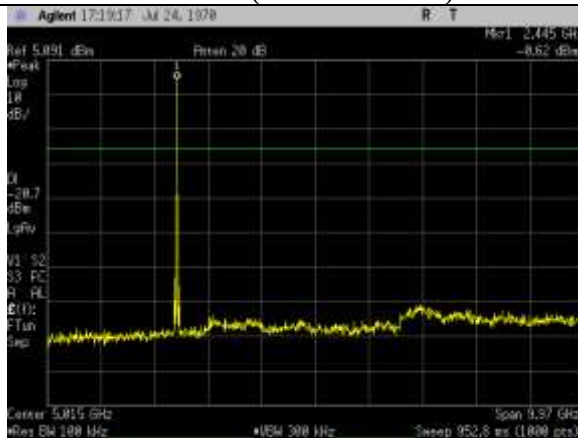

2440MHz (30MHz – 10GHz)

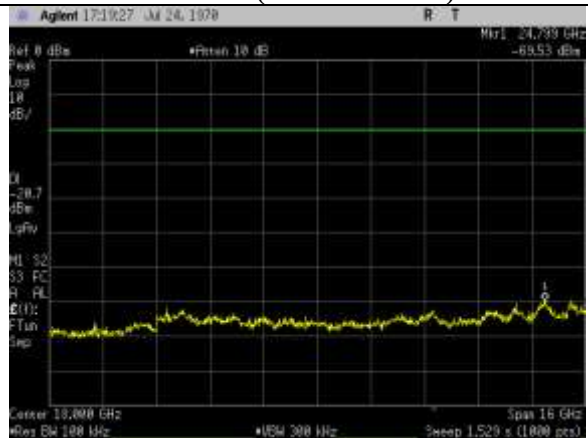

2440MHz (10GHz – 26GHz)

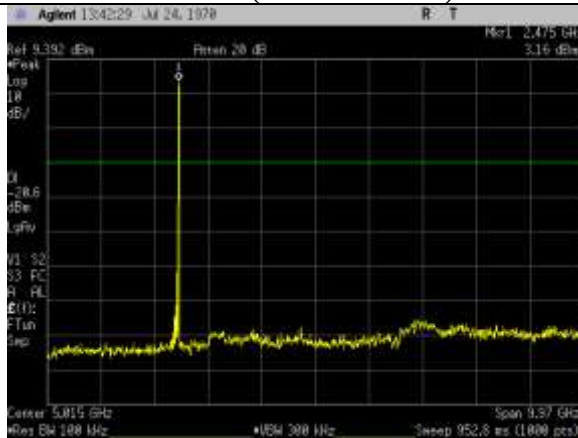


2480MHz (30MHz – 10GHz)




2480MHz (10GHz – 26GHz)


### Radiated Spurious Emissions, Band Edge, Peak Detection

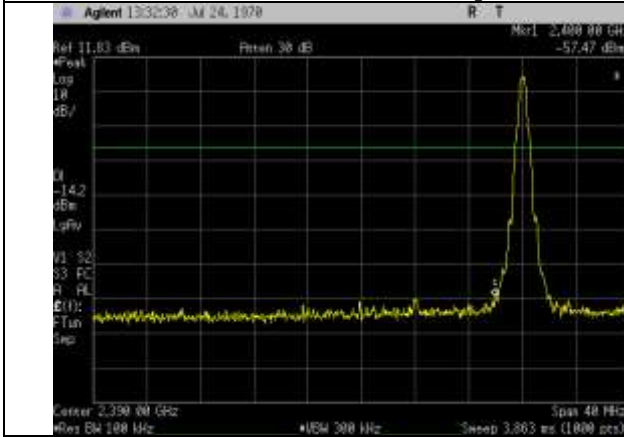


2402MHz, Lower Band Edge, GFSK

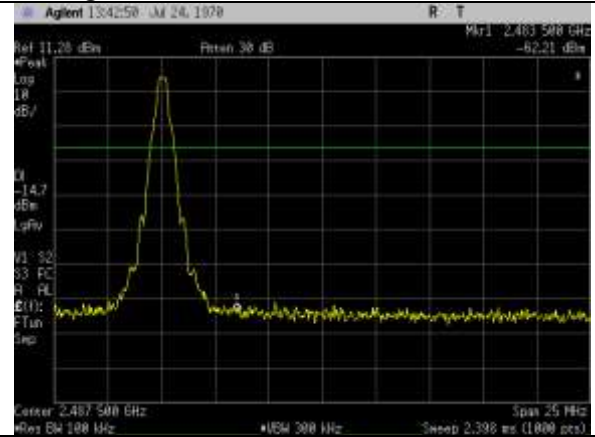


2480MHz, Upper Band Edge, GFSK

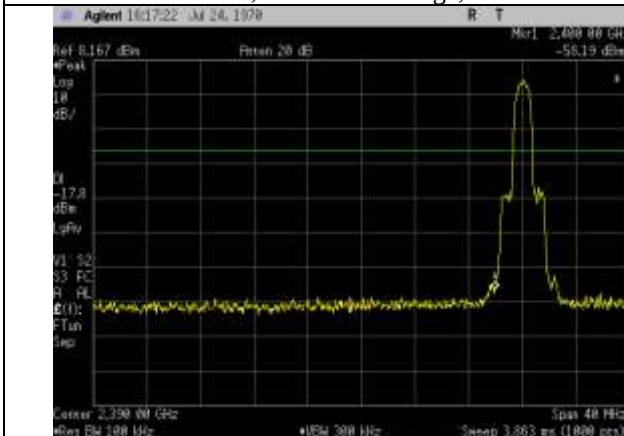


2402MHz, Lower Band Edge, Pi/4DQPSK

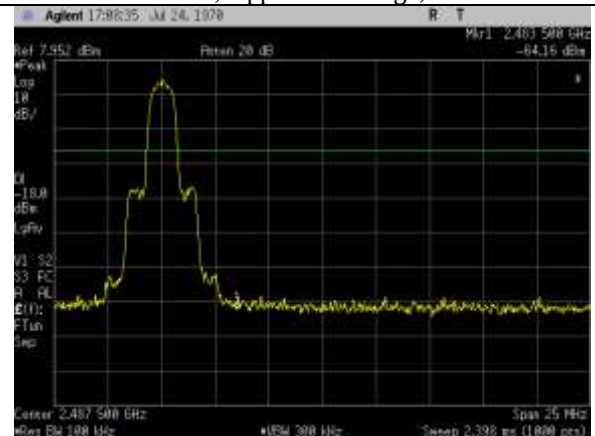

2480MHz, Upper Band Edge, Pi/4DQPSK

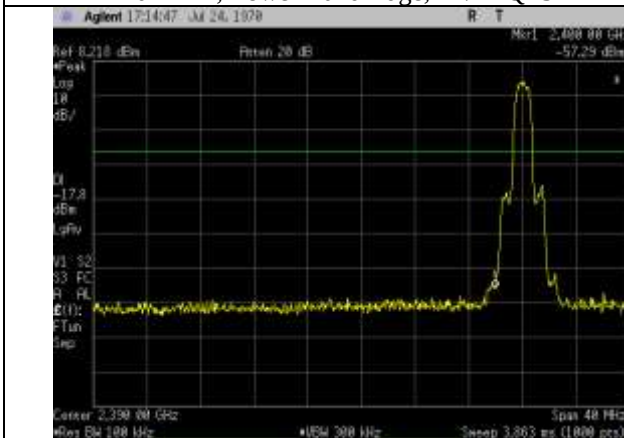

2402MHz, Lower Band Edge, 8DPSK

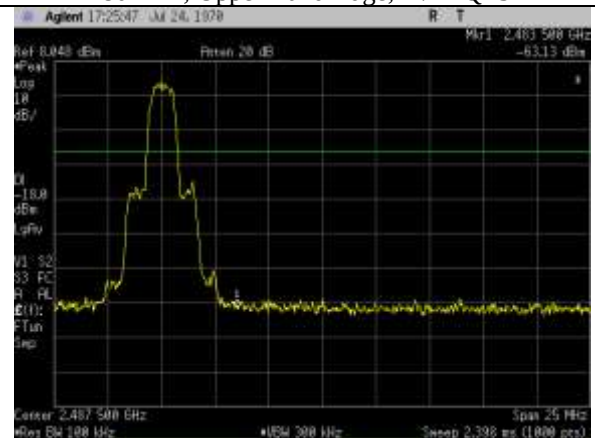

2480MHz, Upper Band Edge, 8DPSK


**Radiated Spurious Emissions, Band Edge, Peak Detection, Hopping Enabled**




2402MHz, Lower Band Edge, GFSK




2480MHz, Upper Band Edge, GFSK

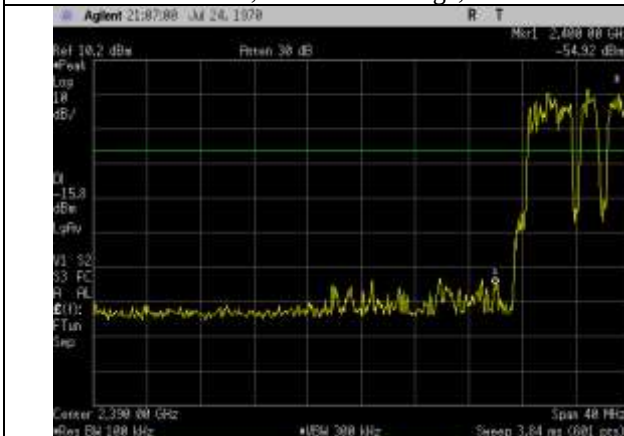


2402MHz, Lower Band Edge, Pi/4DQPSK

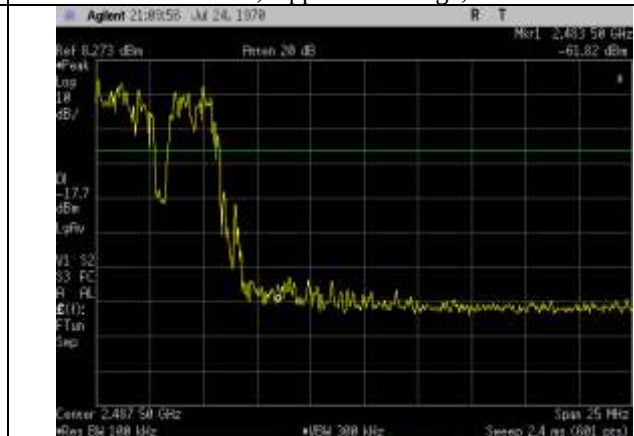

2480MHz, Upper Band Edge, Pi/4DQPSK

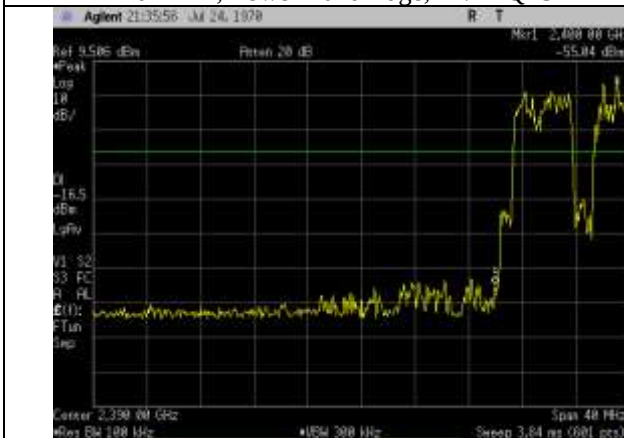

2402MHz, Lower Band Edge, 8DPSK

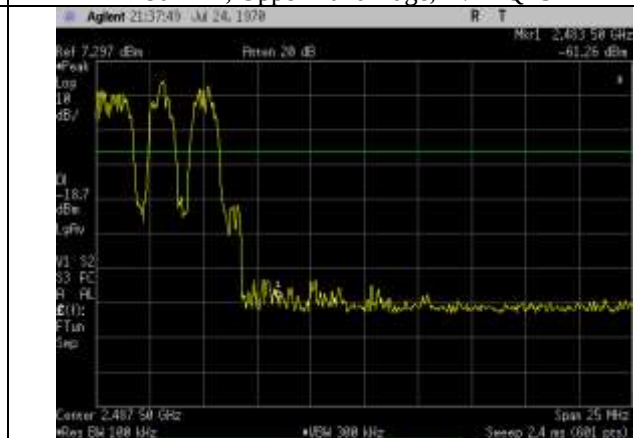

2480MHz, Upper Band Edge, 8DPSK

## IV. Test Equipment

## Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

| MET Asset # | Description                           | Manufacturer                       | Model                  | Last Cal Date | Cal Due Date |
|-------------|---------------------------------------|------------------------------------|------------------------|---------------|--------------|
| 1T4771      | Spectrum Analyzer                     | Keysight                           | E4446A                 | 4/25/2022     | 10/25/2023   |
| 1A1083      | Receiver                              | Rohde & Schwarz                    | ESU40                  | 7/1/2021      | 7/1/2022     |
| 1A1176      | Active Loop Antenna (9KHz-30MHz)      | ETS-Lindgren                       | 6502                   | 06/28/2021    | 06/28/2022   |
| 1A1050      | Bilog Antenna (30MHz – 1GHz)          | Schaffner                          | CBL 6112D              | 12/01/2020    | 12/01/2022   |
| 1A1183      | Horn Antenna (1GHz – 18GHz)           | ETS Lindgren                       | 3117                   | 06/01/2020    | 06/01/2022   |
| 1A1161      | Horn Antenna (18GHz – 40GHz)          | ETS Lindgren                       | 3116C                  | 06/03/2020    | 06/03/2022   |
| 1A1065      | EMI Receiver                          | Rohde & Schwarz                    | ESCI                   | 07/01/2021    | 07/01/2022   |
| 1A1087      | Pulse Limiter                         | Rohde & Schwarz                    | ESH3Z2                 | 06/30/2021    | 06/30/2022   |
| 1A1122      | LISN                                  | Teseq                              | NNB 51                 | 09/13/202     | 09/13/2022   |
| 1A1123      | LISN                                  | Teseq                              | NNB 51                 | 11/20/2021    | 11/20/2022   |
| 1A1197      | RF Current Probe                      | Fisher Custom Communications (FCC) | F-33-2                 | 09/13/2021    | 09/13/2022   |
| 1A1169      | Temp, Humidity, and Pressure Recorder | Omega                              | OM-CP-PRHTemp2000      | 03/02/2022    | 03/02/2023   |
| 1A1149      | DC Milliohm Meter                     | GW Instek                          | GOM-802                | 06/08/2021    | 06/08/2022   |
| 1A1119      | Conducted Emissions Test Area         | Custom Made                        | N/A                    | 06/08/2021    | 06/08/2022   |
| 1A1099      | Generator                             | Com-Power                          | CGO-51000              | See Note      |              |
| 1A1088      | Preamplifier                          | Rohde & Schwarz                    | TS-PR1                 | See Note      |              |
| 1A1044      | Generator                             | Com-Power                          | CG-520                 | See Note      |              |
| 1A1073      | Multi Device Controller               | ETS                                | 2090                   | See Note      |              |
| 1A1074      | System Controller                     | Panasonic                          | WV-CU101               | See Note      |              |
| 1A1080      | Multi-Device                          | ETS                                | 2090                   | See Note      |              |
| 1A1180      | Preamplifier                          | Miteq                              | AMF-7D-01001800-22-10P | See Note      |              |

**Table 19. Test Equipment List**

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

**End of Report**