



HEADQUARTERS: 914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230 • PHONE (410) 354-3300 • FAX (410) 354-3313

1/16/2023

HP, Inc.  
1501 Page Mill Road  
Palo Alto CA 94304

Dear Tony Griffiths,

Enclosed is the EMC Wireless test report for compliance testing of the HP, Inc. P033 as tested to the requirements of FCC Part 15 E and RSS-247 Issue 2 for Intentional Radiators.

Thank you for using the services of Eurofins MET Labs. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,  
EUROFINS MET LABS

A handwritten signature in blue ink that reads "Nancy LaBrecque".

Nancy LaBrecque  
Documentation Department

Reference: WIRA118717-FCC407 RSS247 Rev 2

Certificates and reports shall not be reproduced except in full, without the written permission of Eurofins MET Labs, Inc.

5GHz UNII Band WiFi Test Report  
for the

HP, Inc.  
P033

**Tested under**  
FCC Part 15 E and RSS-247 Issue 2  
For Intentional Radiators



Bryan Taylor, Wireless Team Lead  
Electromagnetic Compatibility Lab



Nancy LaBrecque  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules Part 15.247 under normal use and maintenance.



Matthew Hinojosa  
EMC Manager, Austin Electromagnetic Compatibility Lab

## Report Status Sheet

| Revision | Report Date | Reason for Revision                         |
|----------|-------------|---------------------------------------------|
| Ø        | 12/19/2022  | Initial Issue.                              |
| 1        | 1/7/2023    | Addressing comments from TCB review         |
| 2        | 1/16/2023   | Addressing further comments from TCB review |

## Table of Contents

|             |                                                                               |           |
|-------------|-------------------------------------------------------------------------------|-----------|
| <b>I.</b>   | <b>Executive Summary .....</b>                                                | <b>1</b>  |
|             | A. Purpose of Test .....                                                      | 2         |
|             | B. Executive Summary .....                                                    | 2         |
| <b>II.</b>  | <b>Equipment Configuration .....</b>                                          | <b>3</b>  |
|             | A. Overview .....                                                             | 4         |
|             | B. References .....                                                           | 5         |
|             | C. Test Site .....                                                            | 6         |
|             | D. Measurement Uncertainty .....                                              | 6         |
|             | E. Description of Test Sample .....                                           | 6         |
|             | F. Equipment Configuration .....                                              | 7         |
|             | G. Support Equipment .....                                                    | 7         |
|             | H. Ports and Cabling Information .....                                        | 7         |
|             | I. Mode of Operation .....                                                    | 8         |
|             | J. Method of Monitoring EUT Operation .....                                   | 9         |
|             | K. Modifications .....                                                        | 9         |
|             | a) Modifications to EUT .....                                                 | 9         |
|             | b) Modifications to Test Standard .....                                       | 9         |
|             | L. Disposition of EUT .....                                                   | 9         |
| <b>III.</b> | <b>Electromagnetic Compatibility Criteria for Intentional Radiators .....</b> | <b>10</b> |
|             | § 15.203 Antenna Requirement .....                                            | 11        |
|             | § 15.407(b)(6) Conducted Emissions .....                                      | 12        |
|             | § 15.403(i) 26dB Bandwidth .....                                              | 15        |
|             | §15.407(a)(1) Maximum Conducted Output Power .....                            | 19        |
|             | §15.407(a)(1) Maximum Conducted Output Power .....                            | 23        |
|             | §15.407(a)(1) Maximum Power Spectral Density .....                            | 27        |
|             | §15.407(a)(1) Maximum Conducted Output Power .....                            | 31        |
|             | §15.407(b) & (6 - 7) Undesirable Emissions .....                              | 35        |
|             | §15.407(a)(1) Maximum Conducted Output Power .....                            | 48        |
|             | § 15.407(g) Frequency Stability .....                                         | 55        |
| <b>IV.</b>  | <b>Test Equipment .....</b>                                                   | <b>56</b> |

## List of Tables

|                                                                                           |           |
|-------------------------------------------------------------------------------------------|-----------|
| Table 1. Executive Summary of FCC Part 15.407 Compliance Testing .....                    | 2         |
| Table 2. Executive Summary of ISED Compliance Testing .....                               | 2         |
| Table 3. EUT Summary.....                                                                 | 4         |
| Table 4. References .....                                                                 | 5         |
| Table 5. Uncertainty Calculations Summary.....                                            | 6         |
| Table 6. Equipment Configuration .....                                                    | 7         |
| Table 7. Support Equipment.....                                                           | 7         |
| Table 8. Ports and Cabling Information .....                                              | 7         |
| Table 9. Test Channels Utilized .....                                                     | 8         |
| Table 10. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a) .....   | 12        |
| <b>Table 11. Conducted Emissions Voltage, Test Results, Phase .....</b>                   | <b>13</b> |
| <b>Table 12. Conducted Emissions Voltage, Test Results, Neutral .....</b>                 | <b>14</b> |
| Table 13. Occupied Bandwidth, Test Results (UNII-1 and UNII 2A) .....                     | 16        |
| Table 14. Occupied Bandwidth, Test Results (UNII-2C).....                                 | 17        |
| Table 15. Occupied Bandwidth, Test Results (UNII-3) .....                                 | 18        |
| Table 16. Conducted Output Power, Test Results (UNII-1 and 2A).....                       | 20        |
| Table 17. Conducted Output Power, Test Results (UNII-2C).....                             | 21        |
| Table 18. Conducted Output Power, Test Results (UNII-3).....                              | 22        |
| Table 19. EIRP, Test Results (UNII-1 and 2A).....                                         | 24        |
| Table 20. EIRP, Test Results (UNII-2C).....                                               | 25        |
| Table 21. EIRP, Test Results (UNII-3) .....                                               | 26        |
| Table 22. Power Spectral Density, Test Results (UNII-1 and 2A).....                       | 28        |
| Table 23. Power Spectral Density, Test Results (UNII-2C).....                             | 29        |
| Table 24. Power Spectral Density, Test Results (UNII-3) .....                             | 30        |
| Table 25. EIRP Spectral Density, Test Results (UNII-1 and 2A) .....                       | 32        |
| Table 26. EIRP Spectral Density, Test Results (UNII-2C) .....                             | 33        |
| Table 27. EIRP Spectral Density, Test Results (UNII-3).....                               | 34        |
| Table 28. UNII-1 Worst Case Restricted Band Edge Emissions.....                           | 37        |
| Table 29. UNII-1 Worst Case -27dBm/MHz EIRP Emissions .....                               | 37        |
| Table 30. UNII-2A Worst Case Restricted Band Edge Emissions.....                          | 38        |
| Table 31. UNII-2A Worst Case -27dBm/MHz EIRP Emissions.....                               | 38        |
| Table 32. UNII-2C Worst Case Restricted Band Edge Emissions .....                         | 39        |
| Table 33. UNII-2C Worst Case -27dBm/MHz EIRP Emissions.....                               | 39        |
| Table 34. Worst Case Cabinet Radiation (802.1a, UNII-1, Horizontal Polarity) .....        | 40        |
| Table 35. Worst Case Cabinet Radiation (802.1a, UNII-1, Vertical Polarity) .....          | 41        |
| Table 36. Worst Case Cabinet Radiation (802.1a, UNII-2A, Horizontal Polarity) .....       | 42        |
| Table 37. Worst Case Cabinet Radiation (802.1a, UNII-2A, Vertical Polarity) .....         | 43        |
| Table 38. Worst Case Cabinet Radiation (802.1a, UNII-2C, Horizontal Polarity) .....       | 44        |
| Table 39. Worst Case Cabinet Radiation (802.1a, UNII-2C, Vertical Polarity).....          | 45        |
| Table 40. Worst Case Cabinet Radiation (802.1a, UNII-3, Horizontal Polarity) .....        | 46        |
| Table 41. Worst Case Cabinet Radiation (802.1a, UNII-3, Vertical Polarity) .....          | 47        |
| Table 42. UNII-2C Worst Case Band Edge Emissions Adjacent to the 5600 – 5650MHz Band..... | 49        |
| Table 43. Test Equipment List .....                                                       | 57        |

## List of Terms and Abbreviations

|                              |                                                  |
|------------------------------|--------------------------------------------------|
| <b>AC</b>                    | <b>Alternating Current</b>                       |
| <b>ACF</b>                   | <b>Antenna Correction Factor</b>                 |
| <b>Cal</b>                   | <b>Calibration</b>                               |
| <b>d</b>                     | <b>Measurement Distance</b>                      |
| <b>dB</b>                    | <b>Decibels</b>                                  |
| <b>dB<math>\mu</math>A</b>   | <b>Decibels above one microamp</b>               |
| <b>dB<math>\mu</math>V</b>   | <b>Decibels above one microvolt</b>              |
| <b>dB<math>\mu</math>A/m</b> | <b>Decibels above one microamp per meter</b>     |
| <b>dB<math>\mu</math>V/m</b> | <b>Decibels above one microvolt per meter</b>    |
| <b>DC</b>                    | <b>Direct Current</b>                            |
| <b>E</b>                     | <b>Electric Field</b>                            |
| <b>DSL</b>                   | <b>Digital Subscriber Line</b>                   |
| <b>ESD</b>                   | <b>Electrostatic Discharge</b>                   |
| <b>EUT</b>                   | <b>Equipment Under Test</b>                      |
| <b>f</b>                     | <b>Frequency</b>                                 |
| <b>FCC</b>                   | <b>Federal Communications Commission</b>         |
| <b>GRP</b>                   | <b>Ground Reference Plane</b>                    |
| <b>H</b>                     | <b>Magnetic Field</b>                            |
| <b>HCP</b>                   | <b>Horizontal Coupling Plane</b>                 |
| <b>Hz</b>                    | <b>Hertz</b>                                     |
| <b>IEC</b>                   | <b>International Electrotechnical Commission</b> |
| <b>kHz</b>                   | <b>Kilohertz</b>                                 |
| <b>kPa</b>                   | <b>Kilopascal</b>                                |
| <b>kV</b>                    | <b>Kilovolt</b>                                  |
| <b>LISN</b>                  | <b>Line Impedance Stabilization Network</b>      |
| <b>MHz</b>                   | <b>Megahertz</b>                                 |
| <b><math>\mu</math>H</b>     | <b>Microhenry</b>                                |
| <b><math>\mu</math></b>      | <b>Microfarad</b>                                |
| <b><math>\mu</math>s</b>     | <b>Microseconds</b>                              |
| <b>PRF</b>                   | <b>Pulse Repetition Frequency</b>                |
| <b>RF</b>                    | <b>Radio Frequency</b>                           |
| <b>RMS</b>                   | <b>Root-Mean-Square</b>                          |
| <b>TWT</b>                   | <b>Traveling Wave Tube</b>                       |
| <b>V/m</b>                   | <b>Volts per meter</b>                           |
| <b>VCP</b>                   | <b>Vertical Coupling Plane</b>                   |

# I. Executive Summary

## A. Purpose of Test

An EMC evaluation was performed to determine compliance of the HP, Inc. P033, with the requirements of FCC Part 15 E and RSS-247 Issue 2 . HP, Inc. should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the P033, has been **permanently** discontinued.

## B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 15 E and RSS-247 Issue 2 , in accordance with HP, Inc. purchase order number 10000013761. All tests were conducted using measurement procedures ANSI C63.4-2014 and ANSI C63.10-2013.

| FCC Reference | Description                    | Results   |
|---------------|--------------------------------|-----------|
| §15.203       | Antenna Requirement            | Compliant |
| §15.407(b)(9) | Conducted Emission Limits      | Compliant |
| §15.403(i)    | 26dB Occupied Bandwidth        | Compliant |
| §15.407 (a)   | Maximum Conducted Output Power | Compliant |
| §15.407 (a)   | Maximum Power Spectral Density | Compliant |
| §15.407 (b)   | Undesirable Emissions          | Compliant |
| §15.407(g)    | Frequency Stability            | Compliant |

**Table 1. Executive Summary of FCC Part 15.407 ComplianceTesting**

| ISED Reference | Description                              | Results   |
|----------------|------------------------------------------|-----------|
| RSS-Gen (8.7)  | Conducted Emission Limits                | Compliant |
| RSS-Gen (6.7)  | 99% Occupied Bandwidth                   | Compliant |
| RSS-247 (6.2)  | 26dB Occupied Bandwidth                  | Compliant |
| RSS-247 (6.2)  | Maximum Conducted Output Power           | Compliant |
| RSS-247 (6.2)  | Effective Isotropic Radiated Power       | Compliant |
| RSS-247 (6.2)  | Maximum Power Spectral Density           | Compliant |
| RSS-247 (6.2)  | EIRP Spectral Density                    | Compliant |
| RSS-247 (6.2)  | Undesirable Emissions                    | Compliant |
| RSS-247 (6.2)  | Transmissions in the 5600 – 5650MHz Band | Compliant |
| RSS-247 (6.2)  | Frequency Stability                      | Compliant |

**Table 2. Executive Summary of ISED ComplianceTesting**

## II. Equipment Configuration

## A. Overview

Eurofins MET Labs was contracted by HP, Inc. to perform testing on the P033, under HP, Inc.'s purchase order number 10000013761.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the HP, Inc. P033.

The results obtained relate only to the item(s) tested.

|                                       |                                                         |                                                                                                                                                                                                                                                 |
|---------------------------------------|---------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Model(s) Tested:</b>               | P033                                                    |                                                                                                                                                                                                                                                 |
| <b>Model(s) Covered:</b>              | P033                                                    |                                                                                                                                                                                                                                                 |
| <b>EUT Specifications:</b>            | Primary Power: 120VAC                                   |                                                                                                                                                                                                                                                 |
|                                       | Type of Modulations:                                    | OFDM                                                                                                                                                                                                                                            |
|                                       | Equipment Code:                                         | NII                                                                                                                                                                                                                                             |
|                                       | Antenna Gain <sup>1</sup> :                             | 3.64dBi (Antenna Path 1)<br>3.64dBi (Antenna Path 2)<br>Directional Gain = $3.64 + 10\log(2) = 6.64\text{dBi}$<br><br>Note: the array gain was calculated per KDB 662911 D01 Section F.2.a.(i) for correlated signals with equal antenna gains. |
|                                       | EUT Frequency Ranges:                                   | U-NII-1: 5150 – 5250 MHz                                                                                                                                                                                                                        |
|                                       |                                                         | U-NII-2A: 5250 – 5350 MHz                                                                                                                                                                                                                       |
|                                       |                                                         | U-NII-2C: 5470 – 5725 MHz                                                                                                                                                                                                                       |
|                                       |                                                         | U-NII-3: 5725 – 5850 MHz                                                                                                                                                                                                                        |
|                                       | Maximum Conducted Output Power:                         | U-NII-1: 12.27dBm                                                                                                                                                                                                                               |
|                                       |                                                         | U-NII-2A: 12.72dBm                                                                                                                                                                                                                              |
|                                       |                                                         | U-NII-2C: 13.44dBm                                                                                                                                                                                                                              |
|                                       |                                                         | U-NII-3: 10.26dBm                                                                                                                                                                                                                               |
| <b>Analysis:</b>                      | The results obtained relate only to the item(s) tested. |                                                                                                                                                                                                                                                 |
| <b>Environmental Test Conditions:</b> | Temperature: 15-35° C                                   |                                                                                                                                                                                                                                                 |
|                                       | Relative Humidity: 30-60%                               |                                                                                                                                                                                                                                                 |
|                                       | Barometric Pressure: 860-1060 mbar                      |                                                                                                                                                                                                                                                 |
| <b>Type of Filing:</b>                | Original                                                |                                                                                                                                                                                                                                                 |
| <b>Evaluated by:</b>                  | Bryan Taylor                                            |                                                                                                                                                                                                                                                 |
| <b>Report Date(s):</b>                | 4/20/2022 through 1/12/2023                             |                                                                                                                                                                                                                                                 |

**Table 3. EUT Summary**

<sup>1</sup> The antenna gain information was provided by HP, Inc. at the time of testing.

## B. References

|                                                              |                                                                                                                                        |
|--------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| <b>CFR 47, Part 15, Subpart E</b>                            | Unlicensed National Information Infrastructure Devices (UNII)                                                                          |
| <b>RSS-247: Issue 2</b>                                      | Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices           |
| <b>RSS-Gen: Issue 5</b>                                      | General Requirements for Compliance of Radio Apparatus                                                                                 |
| <b>ANSI C63.4:2014</b>                                       | Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz |
| <b>ANSI C63.10-2013</b>                                      | American National Standard for Testing Unlicensed Wireless Devices                                                                     |
| <b>ISO/IEC 17025:2005</b>                                    | General Requirements for the Competence of Testing and Calibration Laboratories                                                        |
| <b>ANSI C63.10-2013</b>                                      | American National Standard for Testing Unlicensed Wireless Devices                                                                     |
| <b>789033 D02 General UNII Test Procedures New Rules v02</b> | Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E                 |

**Table 4. References**

## C. Test Site

All testing was performed at Eurofins MET Labs, Inc., 13501 McCallen Pass, Austin TX 78753. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 10 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at Eurofins MET Labs.

## D. Measurement Uncertainty

| Test Method                  | Typical Expanded Uncertainty | K | Confidence Level |
|------------------------------|------------------------------|---|------------------|
| RF Frequencies               | ±4.52 Hz                     | 2 | 95%              |
| RF Power Conducted Emissions | ±2.97 dB                     | 2 | 95%              |
| RF Power Radiated Emissions  | ±2.95 dB                     | 2 | 95%              |

Table 5. Uncertainty Calculations Summary

## E. Description of Test Sample

The HP, Inc. P033 (marketed as P033), is a video conferencing video bar designed to act as an audio / video endpoint codec over LAN networks. The device is powered by a AC/DC mains adapter and contains 2.4GHz / 5Ghz Wifi and Bluetooth radio interfaces.




Figure 1. Block Diagram of Test Configuration

## F. Equipment Configuration

The EUT was set up as outlined in **Error! Reference source not found.**, Block Diagram of Test Setup. The laptop computer was used to send test commands to force the transmitters to operate in the appropriate test mode.

| Ref. ID | Name / Description | Model Number | Part Number | Serial Number | Revision |
|---------|--------------------|--------------|-------------|---------------|----------|
| 1       | P033               | P033         | N/A         | Test Sample 1 | N/A      |

Table 6. Equipment Configuration

## G. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

| Ref. ID | Name / Description | Manufacturer | Model Number | Customer Supplied Calibration Data |
|---------|--------------------|--------------|--------------|------------------------------------|
| 1       | Laptop Computer    | Dell         | HW_Lab       | --                                 |

Table 7. Support Equipment

## H. Ports and Cabling Information

| Ref. Id | Port Name on EUT | Qty | Length as tested (m) | Shielded? (Y/N) | Termination Box ID & Port Name |
|---------|------------------|-----|----------------------|-----------------|--------------------------------|
| 5       | DC Power         | 1   | 2m                   | No              | AC/DC adaptor                  |
| 9       | USB C            | 1   | 10m                  | No              | Laptop Computer                |

Table 8. Ports and Cabling Information

## I. Mode of Operation

The support laptop provided a direct means of controlling transmitter parameters. Unless otherwise stated or shown, all tests were performed at worst-case modulation and data rates on the following channels.

| Transmit Band | Operating Mode | Worst Case Transmission Bandwidth | Channel Numbers Tested | Channel Frequencies Tested  | Test Tool Power Setting |
|---------------|----------------|-----------------------------------|------------------------|-----------------------------|-------------------------|
| U-NII-1       | 802.11a        | 20MHz                             | 36 / 40 / 48           | 5180MHz / 5200MHz / 5240MHz | 10.5dBm                 |
|               | 802.11n        | 20MHz                             | 36 / 40 / 48           | 5180MHz / 5200MHz / 5240MHz | 10.5dBm                 |
|               | 802.11n (40)   | 40MHz                             | 38 / 46                | 5190MHz / 5230MHz           | 10.5dBm                 |
|               | 802.11ac       | 80MHz                             | 42                     | 5210MHz                     | 10.5dBm                 |
|               | 802.11ax       | 80MHz                             | 42                     | 5210MHz                     | 10.5dBm                 |
| U-NII-2A      | 802.11a        | 20MHz                             | 52 / 56 / 64           | 5260MHz / 5280MHz / 5320MHz | 10.5dBm                 |
|               | 802.11n        | 20MHz                             | 52 / 56 / 64           | 5260MHz / 5280MHz / 5320MHz | 10.5dBm                 |
|               | 802.11n (40)   | 40MHz                             | 54 / 62                | 5270MHz / 5310MHz           | 10.5dBm                 |
|               | 802.11ac       | 80MHz                             | 58                     | 5290MHz                     | 10.5dBm                 |
|               | 802.11ax       | 80MHz                             | 58                     | 5290MHz                     | 10.5dBm                 |
| U-NII-2A      | 802.11a        | 20MHz                             | 100 / 120 / 144        | 5500MHz / 5600MHz / 5720MHz | 10.5dBm                 |
|               | 802.11n        | 20MHz                             | 100 / 120 / 144        | 5500MHz / 5600MHz / 5720MHz | 10.5dBm                 |
|               | 802.11n (40)   | 40MHz                             | 102 / 118 / 142        | 5510MHz / 5590MHz / 5710MHz | 10.5dBm                 |
|               | 802.11ac       | 80MHz                             | 106 / 122 / 138        | 5230MHz / 5610MHz / 5690MHz | 10.5dBm                 |
|               | 802.11ax       | 80MHz                             | 106 / 122 / 138        | 5230MHz / 5610MHz / 5690MHz | 10.5dBm                 |
| U-NII-3       | 802.11a        | 20MHz                             | 149 / 157 / 165        | 5745MHz / 5785MHz / 5825MHz | 10.5dBm                 |
|               | 802.11n        | 20MHz                             | 149 / 157 / 165        | 5745MHz / 5785MHz / 5825MHz | 10.5dBm                 |
|               | 802.11n (40)   | 40MHz                             | 151 / 159              | 5755MHz / 5780MHz           | 10.5dBm                 |
|               | 802.11ac       | 80MHz                             | 155                    | 5775MHz                     | 10.5dBm                 |
|               | 802.11ax       | 80MHz                             | 155                    | 5775MHz                     | 10.5dBm                 |

**Table 9. Test Channels Utilized**

**J. Method of Monitoring EUT Operation**

A spectrum analyzer was used to confirm proper transmitter operation.

**K. Modifications****a) Modifications to EUT**

No modifications were made to the EUT.

**b) Modifications to Test Standard**

No modifications were made to the test standard.

**L. Disposition of EUT**

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Polycom Inc. upon completion of testing.

### **III. Electromagnetic Compatibility Criteria for Intentional Radiators**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.203                      Antenna Requirement

**Test Requirement:**            **§ 15.203:** An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Results:**                                The EUT as tested is compliant the criteria of §15.203. The antenna is not accessible by the end user.

**Test Engineer(s):**                Bryan Taylor

**Test Date(s):**                        5/4/2022

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.407(b)(6) Conducted Emissions

**Test Requirement(s):** § 15.407 (b)(6): Any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

**§ 15.207 (a):** For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Omega$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency range<br>(MHz) | § 15.207(a), Conducted Limit (dB $\mu$ V) |         |
|--------------------------|-------------------------------------------|---------|
|                          | Quasi-Peak                                | Average |
| 0.15- 0.5                | 66 – 56                                   | 56 - 46 |
| 0.5 - 5                  | 56                                        | 46      |
| 5 - 30                   | 60                                        | 50      |


**Table 10. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)**

**Test Procedure:** The EUT was placed on a non-metallic table above a ground plane. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50  $\Omega$ /50  $\mu$ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with ANSI C63.4-2014 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz". Scans were performed with the transmitter on.

**Test Results:** The EUT was compliant with requirements of this section.

**Test Engineer(s):** Bryan Taylor, James Seib

**Test Date(s):** 5/3/2022 – 5/18/2022

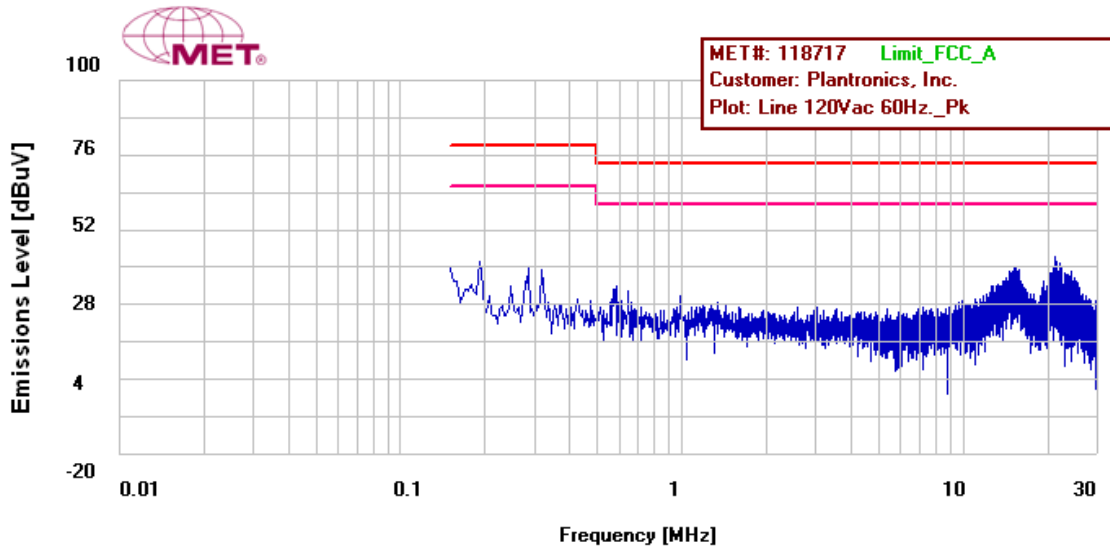


Plot 1. Conducted Emissions Voltage, Phase

| Measurement Location                                 | Measurement | Limit    | Result |
|------------------------------------------------------|-------------|----------|--------|
| Bonding measurement from LISN ground to ground plane | 2.095 mΩ    | < 2.5 mΩ | Pass   |

| Line                | Freq (MHz) | QP Amplitude (dBμV) | QP Limit (dBμV) | Margin (dB) | Result | Average Amplitude (dBμV) | Average Limit (dBμV) | Margin (dB) | Result |
|---------------------|------------|---------------------|-----------------|-------------|--------|--------------------------|----------------------|-------------|--------|
| Line 120 VAC/60 Hz. | 21.234     | 42.40               | 73.00           | -30.60      | Pass   | 38.90                    | 60.00                | -21.10      | Pass   |
| Line 120 VAC/60 Hz. | 0.190      | 42.40               | 79.00           | -36.60      | Pass   | 28.50                    | 66.00                | -37.50      | Pass   |
| Line 120 VAC/60 Hz. | 15.578     | 36.90               | 73.00           | -36.10      | Pass   | 31.50                    | 60.00                | -28.50      | Pass   |
| Line 120 VAC/60 Hz. | 0.150      | 48.50               | 79.00           | -30.50      | Pass   | 32.50                    | 66.00                | -33.50      | Pass   |
| Line 120 VAC/60 Hz. | 0.286      | 33.40               | 79.00           | -45.60      | Pass   | 21.70                    | 66.00                | -44.30      | Pass   |
| Line 120 VAC/60 Hz. | 0.318      | 32.00               | 79.00           | -47.00      | Pass   | 22.00                    | 66.00                | -44.00      | Pass   |

Table 11. Conducted Emissions Voltage, Test Results, Phase

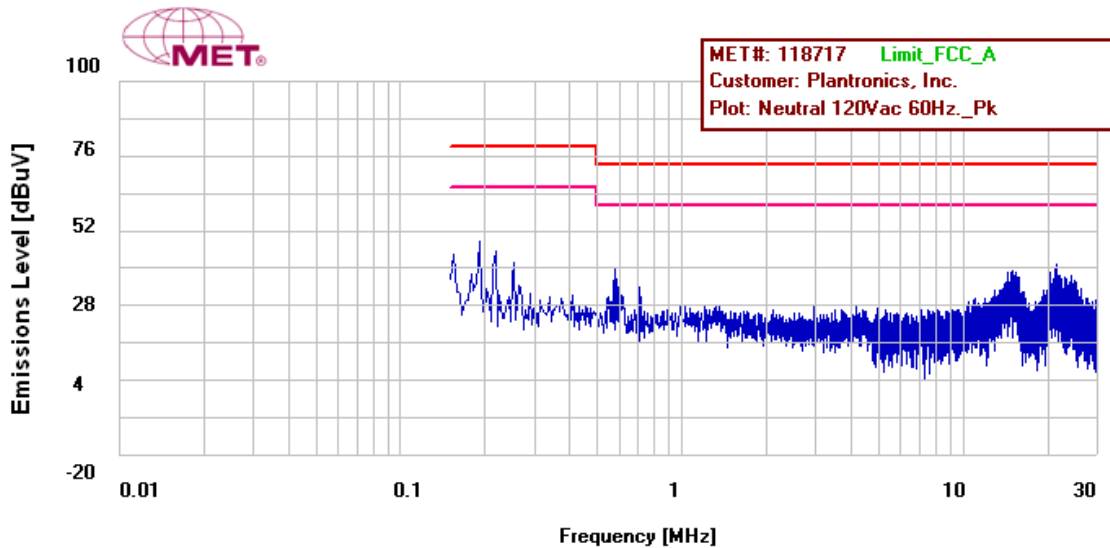

**Plot 2. Conducted Emissions Voltage, Neutral**

| Measurement Location                                 | Measurement | Limit    | Result |
|------------------------------------------------------|-------------|----------|--------|
| Bonding measurement from LISN ground to ground plane | 2.095 mΩ    | < 2.5 mΩ | Pass   |

| Line                   | Freq (MHz) | QP Amplitude (dBμV) | QP Limit (dBμV) | Margin (dB) | Result | Average Amplitude (dBμV) | Average Limit (dBμV) | Margin (dB) | Result |
|------------------------|------------|---------------------|-----------------|-------------|--------|--------------------------|----------------------|-------------|--------|
| Neutral 120 VAC/60 Hz. | 0.190      | 43.20               | 79.00           | -35.80      | Pass   | 29.20                    | 66.00                | -36.80      | Pass   |
| Neutral 120 VAC/60 Hz. | 0.218      | 39.50               | 79.00           | -39.50      | Pass   | 25.90                    | 66.00                | -40.10      | Pass   |
| Neutral 120 VAC/60 Hz. | 0.154      | 48.40               | 79.00           | -30.60      | Pass   | 32.00                    | 66.00                | -34.00      | Pass   |
| Neutral 120 VAC/60 Hz. | 0.254      | 36.00               | 79.00           | -43.00      | Pass   | 23.00                    | 66.00                | -43.00      | Pass   |
| Neutral 120 VAC/60 Hz. | 21.482     | 41.70               | 73.00           | -31.30      | Pass   | 38.20                    | 60.00                | -21.80      | Pass   |
| Neutral 120 VAC/60 Hz. | 0.582      | 37.50               | 73.00           | -35.50      | Pass   | 30.20                    | 60.00                | -29.80      | Pass   |

**Table 12. Conducted Emissions Voltage, Test Results, Neutral**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15. 407                      26dB Bandwidth

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Test Requirements:</b> | For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement. |
| <b>Test Procedure:</b>    | The transmitter was set to low, mid, and high operating frequencies at the highest output power and connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth, VBW > RBW. The 26 dB Bandwidth was measured and recorded.                                                                                                                                                                                    |
| <b>Test Results</b>       | The 26 dB Bandwidth was compliant with the requirements of this section. The worst-case tabular data for each UNII band is shown below. Due to the large number of individual plots for each measurement, they are contained in a separate appendix.                                                                                                                                                                                                                                                                                                                 |
| <b>Test Engineer(s):</b>  | Bryan Taylor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Test Date(s):</b>      | 5/4/2022                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

| U-NII SubBand 1 and 2A OBW                      | Port 1<br>(-26dB)<br>(MHz) | Port 1<br>(99%)<br>(MHz) | Port 2<br>(-26dB)<br>(MHz) | Port 2<br>(99%)<br>(MHz) |
|-------------------------------------------------|----------------------------|--------------------------|----------------------------|--------------------------|
| U-NII-1_5180MHz_Low Ch_36_20MHz BW_a-mode       | 19.118                     | 16.591                   | 19.535                     | 16.558                   |
| U-NII-1_5200MHz_low_mid Ch_40_20MHz BW_a-mode   | 19.742                     | 16.563                   | 19.118                     | 16.591                   |
| U-NII-1_5240MHz_high_mid Ch_48_20MHz BW_a-mode  | 19.050                     | 16.554                   | 19.540                     | 16.579                   |
| U-NII-1_5180MHz_Low Ch_36_20MHz BW_n-mode       | 20.348                     | 17.717                   | 20.068                     | 17.745                   |
| U-NII-1_5200MHz_low_mid Ch_40_20MHz BW_n-mode   | 20.448                     | 17.751                   | 20.200                     | 17.675                   |
| U-NII-1_5240MHz_high_mid Ch_48_20MHz BW_n-mode  | 20.325                     | 17.705                   | 20.412                     | 17.692                   |
| U-NII-1_5190MHz_Low Ch_38_40MHz BW_n-mode       | 40.205                     | 36.182                   | 40.150                     | 36.136                   |
| U-NII-1_5230MHz_high_mid Ch_46_40MHz BW_n-mode  | 40.077                     | 36.163                   | 39.890                     | 36.205                   |
| U-NII-1_5210MHz_Low mid Ch_42_80MHz BW_ac-mode  | 82.619                     | 75.885                   | 82.785                     | 75.573                   |
| U-NII-1_5210MHz_Low mid Ch_42_80MHz BW_ax-mode  | 84.305                     | 77.690                   | 84.009                     | 77.387                   |
| U-NII-2A_5260MHz_low_mid Ch_52_20MHz BW_a-mode  | 19.652                     | 16.769                   | 19.599                     | 16.613                   |
| U-NII-2A_5280MHz_high_mid Ch_56_20MHz BW_a-mode | 19.484                     | 16.541                   | 19.539                     | 16.556                   |
| U-NII-2A_5320MHz_High Ch_64_20MHz BW_a-mode     | 19.658                     | 16.613                   | 19.287                     | 16.601                   |
| U-NII-2A_5260MHz_low_mid Ch_52_20MHz BW_n-mode  | 19.953                     | 16.622                   | 20.531                     | 17.690                   |
| U-NII-2A_5280MHz_high_mid Ch_56_20MHz BW_n-mode | 19.520                     | 16.581                   | 20.382                     | 17.738                   |
| U-NII-2A_5320MHz_High Ch_64_20MHz BW_n-mode     | 20.371                     | 17.714                   | 20.311                     | 17.699                   |
| U-NII-2A_5270MHz_low_mid Ch_54_40MHz BW_n-mode  | 40.038                     | 36.230                   | 39.810                     | 36.154                   |
| U-NII-2A_5310MHz_High Ch_62_40MHz BW_n-mode     | 40.104                     | 36.222                   | 40.077                     | 36.152                   |
| U-NII-2A_5290MHz_High Ch_58_80MHz BW_ac-mode    | 82.797                     | 75.823                   | 82.973                     | 75.852                   |
| U-NII-2A_5290MHz_High Ch_58_80MHz BW_ax-mode    | 83.071                     | 77.507                   | 84.356                     | 77.335                   |

Table 13. Occupied Bandwidth, Test Results (UNII-1 and UNII 2A)

| U-NII SubBand 2C OBW                          | Port 1<br>(-26dB)<br>(MHz) | Port 1<br>(99%)<br>(MHz) | Port 2<br>(-26dB)<br>(MHz) | Port 2<br>(99%)<br>(MHz) |
|-----------------------------------------------|----------------------------|--------------------------|----------------------------|--------------------------|
| U-NII-2C_5500MHz_Low Ch_100_20MHz BW_a-mode   | 21.80                      | 16.58                    | 21.99                      | 16.53                    |
| U-NII-2C_5600MHz_Mid Ch_120_20MHz BW_a-mode   | 21.85                      | 16.54                    | 21.67                      | 16.54                    |
| U-NII-2C_5720MHz_High Ch_144_20MHz BW_a-mode  | 21.96                      | 16.71                    | 22.06                      | 16.66                    |
| U-NII-2C_5500MHz_High Ch_100_20MHz BW_n-mode  | 22.30                      | 17.79                    | 22.46                      | 17.73                    |
| U-NII-2C_5600MHz_High Ch_120_20MHz BW_n-mode  | 22.32                      | 17.77                    | 22.85                      | 17.81                    |
| U-NII-2C_5720MHz_Low Ch_144_20MHz BW_n-mode   | 22.41                      | 17.75                    | 22.49                      | 17.96                    |
| U-NII-2C_5500MHz_Low Ch_100_20MHz BW_ac-mode  | 22.36                      | 17.76                    | 22.31                      | 17.70                    |
| U-NII-2C_5600MHz_Mid Ch_120_20MHz BW_ac-mode  | 22.08                      | 17.76                    | 22.37                      | 17.74                    |
| U-NII-2C_5720MHz_High Ch_144_20MHz BW_ac-mode | 22.25                      | 17.78                    | 22.22                      | 17.78                    |
| U-NII-2C_5510MHz_High Ch_102_40MHz BW_n-mode  | 44.36                      | 36.25                    | 44.00                      | 36.21                    |
| U-NII-2C_5590MHz_High Ch_118_40MHz BW_n-mode  | 44.10                      | 36.35                    | 44.25                      | 36.20                    |
| U-NII-2C_5710MHz_Low Ch_142_40MHz BW_n-mode   | 44.43                      | 36.24                    | 44.41                      | 36.27                    |
| U-NII-2C_5510MHz_Mid Ch_102_40MHz BW_ac-mode  | 44.06                      | 36.26                    | 44.19                      | 36.28                    |
| U-NII-2C_5590MHz_High Ch_118_40MHz BW_ac-mode | 44.29                      | 36.40                    | 44.43                      | 36.32                    |
| U-NII-2C_5710MHz_High Ch_142_40MHz BW_ac-mode | 44.39                      | 36.23                    | 44.15                      | 36.31                    |
| U-NII-2C_5530MHz_Low Ch_106_80MHz BW_ac-mode  | 89.53                      | 75.89                    | 89.52                      | 76.06                    |
| U-NII-2C_5610MHz_Mid Ch_122_80MHz BW_ac-mode  | 89.96                      | 75.57                    | 89.66                      | 75.72                    |
| U-NII-2C_5690MHz_High Ch_138_80MHz BW_ac-mode | 89.73                      | 75.97                    | 89.68                      | 76.03                    |
| U-NII-2C_5530MHz_Low Ch_106_80MHz BW_ax-mode  | 89.82                      | 77.48                    | 90.27                      | 77.47                    |
| U-NII-2C_5610MHz_Mid Ch_122_80MHz BW_ax-mode  | 90.60                      | 77.25                    | 90.16                      | 77.52                    |
| U-NII-2C_5690MHz_High Ch_138_80MHz BW_ax-mode | 89.96                      | 77.97                    | 90.25                      | 78.09                    |

**Table 14. Occupied Bandwidth, Test Results (UNII-2C)**

| U-NII SubBand 3 OBW                          | Port 1<br>(-26dB)<br>(MHz) | Port 1<br>(99%)<br>(MHz) | Port 2<br>(-26dB)<br>(MHz) | Port 2<br>(99%)<br>(MHz) |
|----------------------------------------------|----------------------------|--------------------------|----------------------------|--------------------------|
| U-NII-3_5745MHz_Low Ch_149_20MHz BW_a-mode   | 16.279                     | 16.472                   | 16.470                     | 16.427                   |
| U-NII-3_5785MHz_Mid Ch_157_20MHz BW_a-mode   | 16.207                     | 16.490                   | 16.473                     | 16.405                   |
| U-NII-3_5825MHz_High Ch_165_20MHz BW_a-mode  | 16.250                     | 16.495                   | 16.385                     | 16.431                   |
| U-NII-3_5745MHz_Low Ch_149_20MHz BW_n-mode   | 17.587                     | 17.664                   | 17.635                     | 17.711                   |
| U-NII-3_5785MHz_Mid Ch_157_20MHz BW_n-mode   | 16.401                     | 16.510                   | 15.796                     | 16.493                   |
| U-NII-3_5825MHz_High Ch_165_20MHz BW_n-mode  | 16.426                     | 16.451                   | 16.124                     | 16.443                   |
| U-NII-3_5755MHz_Low Ch_151_40MHz BW_n-mode   | 17.690                     | 17.616                   | 36.325                     | 36.123                   |
| U-NII-3_5795MHz_High Ch_159_40MHz BW_n-mode  | 35.326                     | 36.197                   | 36.424                     | 36.018                   |
| U-NII-3_5775MHz_High Ch_155_80MHz BW_ac-mode | 75.980                     | 75.912                   | 81.535                     | 75.646                   |
| U-NII-3_5775MHz_High Ch_155_80MHz BW_ax-mode | 77.835                     | 77.340                   | 73.472                     | 77.256                   |

**Table 15. Occupied Bandwidth, Test Results (UNII-3)**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### §15. 407(a) Maximum Conducted Output Power

**Test Requirements:** **§15.407(a)(1)(iv):** For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**§15.407(a)(2):** For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**§15.407(a)(3)(i):** For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

**Test Procedure:** The EUT was connected to a spectrum analyzer through a cable and attenuator. Measurements were taken with the EUT set to transmit continuously on its low, mid, and high channels. Its power was measured according to measurement method SA-1, as described in ANSI C63.10. the maximum conducted power across all ports was calculated via the following formula:

$$\text{Max Conducted Output Power, combined} = 10 * \log ( 10^{(\text{Port 1dBm}/10)} + 10^{(\text{Port2dBm}/10)} )$$

**Test Results:** The EUT as tested is compliant with the requirements of this section. The worst-case tabular data for each UNII band is shown below. Due to the large number of individual plots for each measurement, they are contained in a separate appendix.

Straddle channels which have transmissions that extend from U-NII-2C into the U-NII-3 band are presented in the U-NII-3 data table.

**Test Engineer(s):** Bryan Taylor

**Test Date(s):** 5/4/2022

|                                                  | Port 1<br>(dBm) | Port 2<br>(dBm) | Sum<br>(dBm) | Limit<br>(dBm) | Margin<br>dB |
|--------------------------------------------------|-----------------|-----------------|--------------|----------------|--------------|
| <b>U-NII SubBand 1 and 2A FCC PWR</b>            |                 |                 |              |                |              |
| U-NII-1_5180MHz_Low Ch_36_20MHz BW_a-mode        | 8.08            | 8.18            | 11.14        | 24             | 12.86        |
| U-NII-1_5200MHz_low_Mid Ch_40_20MHz BW_a-mode    | 8.59            | 8.50            | 11.56        | 24             | 12.44        |
| U-NII-1_5240MHz_high_mid Ch_48_20MHz BW_a-mode   | 9.22            | 9.30            | 12.27        | 24             | 11.73        |
| U-NII-1_5180MHz_Low Ch_36_20MHz BW_n-mode        | 8.23            | 7.91            | 11.08        | 24             | 12.92        |
| U-NII-1_5200MHz_low_Mid Ch_40_20MHz BW_n-mode    | 8.30            | 8.30            | 11.31        | 24             | 12.69        |
| U-NII-1_5240MHz_high_mid Ch_48_20MHz BW_n-mode   | 9.03            | 8.99            | 12.02        | 24             | 11.98        |
| U-NII-1_5190MHz_Low Ch_38_40MHz BW_n-mode        | 8.57            | 8.56            | 11.57        | 24             | 12.43        |
| U-NII-1_5230MHz_high_Mid Ch_46_40MHz BW_n-mode   | 9.05            | 9.08            | 12.07        | 24             | 11.93        |
| U-NII-1_5210MHz_Low Mid Ch_42_80MHz BW_ac-mode   | 9.00            | 8.96            | 11.99        | 24             | 12.01        |
| U-NII-1_5210MHz_Low Mid Ch_42_80MHz BW_ax-mode   | 9.02            | 9.00            | 12.02        | 24             | 11.98        |
| U-NII-2A_5260MHz_low_mid Ch_52_20MHz BW_a-mode   | 9.25            | 9.30            | 12.29        | 24             | 11.71        |
| U-NII-2A_5300MHz_high_Mid Ch_60_20MHz BW_a-mode  | 9.61            | 9.49            | 12.56        | 24             | 11.44        |
| U-NII-2A_5320MHz_High Ch_64_20MHz BW_a-mode      | 9.43            | 9.42            | 12.43        | 24             | 11.57        |
| U-NII-2A_5260MHz_low_mid Ch_52_20MHz BW_n-mode   | 9.09            | 9.03            | 12.07        | 24             | 11.93        |
| U-NII-2A_5300MHz_high_Mid Ch_60_20MHz BW_n-mode  | 9.28            | 9.27            | 12.29        | 24             | 11.71        |
| U-NII-2A_5320MHz_High Ch_64_20MHz BW_n-mode      | 9.24            | 9.16            | 12.21        | 24             | 11.79        |
| U-NII-2A_5270MHz_low_Mid Ch_54_40MHz BW_n-mode   | 9.44            | 9.38            | 12.42        | 24             | 11.58        |
| U-NII-2A_5310MHz_High Ch_62_40MHz BW_n-mode      | 9.44            | 9.49            | 12.47        | 24             | 11.53        |
| U-NII-2A_5290MHz_High_Mid Ch_58_80MHz BW_ac-mode | 9.70            | 9.68            | 12.70        | 24             | 11.30        |
| U-NII-2A_5290MHz_High_Mid Ch_58_80MHz BW_ax-mode | 9.69            | 9.74            | 12.72        | 24             | 11.28        |

Table 16. Conducted Output Power, Test Results (UNII-1 and 2A)

| U-NII SubBand 2C FCC PWR                      | Port 1 (dBm) | Port 2 (dBm) | Sum (dBm) | Limit (dBm) | Margin dB |
|-----------------------------------------------|--------------|--------------|-----------|-------------|-----------|
| U-NII-2C_5500MHz_Low Ch_100_20MHz BW_a-mode   | 8.70         | 8.71         | 11.72     | 24          | 12.28     |
| U-NII-2C_5600MHz_Mid Ch_120_20MHz BW_a-mode   | 8.38         | 8.40         | 11.40     | 24          | 12.60     |
| U-NII-2C_5720MHz_High Ch_144_20MHz BW_a-mode  | 9.27         | 9.29         | 12.29     | 24          | 11.71     |
| U-NII-2C_5500MHz_Low Ch_100_20MHz BW_n-mode   | 8.54         | 8.55         | 11.56     | 24          | 12.44     |
| U-NII-2C_5600MHz_Mid Ch_120_20MHz BW_n-mode   | 8.14         | 8.20         | 11.18     | 24          | 12.82     |
| U-NII-2C_5720MHz_High Ch_144_20MHz BW_n-mode  | 9.14         | 9.10         | 12.13     | 24          | 11.87     |
| U-NII-2C_5510MHz_Low Ch_102_40MHz BW_n-mode   | 8.82         | 8.82         | 11.83     | 24          | 12.17     |
| U-NII-2C_5590MHz_Mid Ch_118_40MHz BW_n-mode   | 8.44         | 8.41         | 11.44     | 24          | 12.56     |
| U-NII-2C_5710MHz_High Ch_142_40MHz BW_n-mode  | 9.41         | 9.28         | 12.36     | 24          | 11.64     |
| U-NII-2C_5510MHz_Low Ch_102_40MHz BW_ac-mode  | 8.81         | 8.86         | 11.85     | 24          | 12.15     |
| U-NII-2C_5590MHz_Mid Ch_118_40MHz BW_ac-mode  | 8.43         | 8.42         | 11.44     | 24          | 12.56     |
| U-NII-2C_5710MHz_High Ch_142_40MHz BW_ac-mode | 9.39         | 9.46         | 12.43     | 24          | 11.57     |
| U-NII-2C_5530MHz_Low Ch_106_80MHz BW_ac-mode  | 8.63         | 8.67         | 11.66     | 24          | 12.34     |
| U-NII-2C_5610MHz_Mid Ch_122_80MHz BW_ac-mode  | 8.50         | 8.59         | 11.55     | 24          | 12.45     |
| U-NII-2C_5690MHz_High Ch_138_80MHz BW_ac-mode | 9.03         | 9.03         | 12.04     | 24          | 11.96     |
| U-NII-2C_5530MHz_Low Ch_106_80MHz BW_ax-mode  | 10.56        | 10.29        | 13.44     | 24          | 10.56     |
| U-NII-2C_5610MHz_Mid Ch_122_80MHz BW_ax-mode  | 10.38        | 9.85         | 13.14     | 24          | 10.86     |
| U-NII-2C_5690MHz_High Ch_138_80MHz BW_ax-mode | 10.07        | 9.58         | 12.84     | 24          | 11.16     |

Table 17. Conducted Output Power, Test Results (UNII-2C)

| U-NII SubBand 3 PWR                                        | Port 1 (dBm) | Port 2 (dBm) | Sum (dBm) | Limit (dBm) | Margin dB |
|------------------------------------------------------------|--------------|--------------|-----------|-------------|-----------|
| U-NII-3_5745MHz_Low Ch_149_20MHz BW_a-mode                 | 7.21         | 6.66         | 9.95      | 30          | 20.05     |
| U-NII-3_5785MHz_Mid Ch_157_20MHz BW_a-mode                 | 7.18         | 6.39         | 9.81      | 30          | 20.19     |
| U-NII-3_5825MHz_High Ch_165_20MHz BW_a-mode                | 7.08         | 6.00         | 9.58      | 30          | 20.42     |
| U-NII-3_5745MHz_Low Ch_149_20MHz BW_n-mode                 | 7.07         | 6.55         | 9.83      | 30          | 20.17     |
| U-NII-3_5785MHz_Mid Ch_157_20MHz BW_n-mode                 | 6.96         | 6.14         | 9.58      | 30          | 20.42     |
| U-NII-3_5825MHz_High Ch_165_20MHz BW_n-mode                | 6.89         | 5.88         | 9.42      | 30          | 20.58     |
| U-NII-3_5755MHz_Low Ch_151_40MHz BW_n-mode                 | 7.46         | 6.94         | 10.22     | 30          | 19.78     |
| U-NII-3_5795MHz_High_Mid Ch_159_40MHz BW_n-mode            | 7.13         | 6.52         | 9.85      | 30          | 20.15     |
| U-NII-3_5775MHz_High_Mid Ch_155_80MHz BW_ac-mode           | 7.63         | 6.83         | 10.26     | 30          | 19.74     |
| U-NII-3_5775MHz_High_Mid Ch_155_80MHz BW_ax-mode           | 7.50         | 6.86         | 10.20     | 30          | 19.80     |
| Straddle Ch_ U-NII-2C_5720MHz_High Ch_144_20MHz BW_a-mode  | 1.70         | 1.64         | 4.68      | 30          | 25.32     |
| Straddle Ch_ U-NII-2C_5720MHz_High Ch_144_20MHz BW_n-mode  | 1.93         | 1.91         | 4.93      | 30          | 25.07     |
| Straddle Ch_ U-NII-2C_5720MHz_High Ch_144_20MHz BW_ac-mode | 1.83         | 1.93         | 4.89      | 30          | 25.11     |
| Straddle Ch_ U-NII-2C_5710MHz_High Ch_142_40MHz BW_n-mode  | -2.28        | -2.28        | 0.73      | 30          | 29.27     |
| Straddle Ch_ U-NII-2C_5710MHz_High Ch_142_40MHz BW_ac-mode | -2.32        | -2.26        | 0.72      | 30          | 29.28     |
| Straddle Ch_ U-NII-2C_5690MHz_High Ch_138_80MHz BW_ac-mode | -6.47        | -6.47        | -3.46     | 30          | 33.46     |

Table 18. Conducted Output Power, Test Results (UNII-3)

## Electromagnetic Compatibility Criteria for Intentional Radiators

### RSS-247 (6) Effective Isotropic Radiated Power (EIRP)

**Test Requirements:** §6.2.1.1 (5150 – 5250MHz): For other devices, the maximum e.i.r.p. shall not exceed 200 mW or  $10 + 10 \log_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

§6.2.2.1 (5250 – 5350MHz): Devices, other than devices installed in vehicles, shall comply with the following:

- The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10} B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

§6.2.3.1 (5470 – 5600MHz and 5650 – 5725MHz): The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10} B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

**Test Procedure:** The maximum sum conducted output power (across all transmit ports) was added to the antenna gain to arrive at the EIRP. The antenna gain used was the worst case directional gain calculated per KDB 662911 D01 for two equal gain antennas with correlated signals; 6.64dBi in this case.

**Test Results:** The EUT as tested is compliant with the requirements of this section. The worst-case tabular data for each UNII band is shown below. Due to the large number of individual plots for each measurement, they are contained in a separate appendix.

Straddle channels which have transmissions that extend from U-NII-2C into the U-NII-3 band are presented in the U-NII-3 data table.

**Test Engineer(s):** Bryan Taylor

**Test Date(s):** 5/4/2022 – 8/31/2022

| U-NII SubBand 1 and 2A FCC PWR                   | Conducted Power Sum (dBm) | Antenna Gain (dBi) | EIRP (dBm) | Limit (dBm) | Margin dB |
|--------------------------------------------------|---------------------------|--------------------|------------|-------------|-----------|
| U-NII-1_5180MHz_Low Ch_36_20MHz BW_a-mode        | 11.14                     | 6.64               | 17.78      | 22.1        | 4.32      |
| U-NII-1_5200MHz_low_Mid Ch_40_20MHz BW_a-mode    | 11.56                     | 6.64               | 18.2       | 22.1        | 3.9       |
| U-NII-1_5240MHz_high_mid Ch_48_20MHz BW_a-mode   | 12.27                     | 6.64               | 18.91      | 22.1        | 3.19      |
| U-NII-1_5180MHz_Low Ch_36_20MHz BW_n-mode        | 11.08                     | 6.64               | 17.72      | 22.1        | 4.38      |
| U-NII-1_5200MHz_low_Mid Ch_40_20MHz BW_n-mode    | 11.31                     | 6.64               | 17.95      | 22.1        | 4.15      |
| U-NII-1_5240MHz_high_mid Ch_48_20MHz BW_n-mode   | 12.02                     | 6.64               | 18.66      | 22.1        | 3.44      |
| U-NII-1_5190MHz_Low Ch_38_40MHz BW_n-mode        | 11.57                     | 6.64               | 18.21      | 22.1        | 3.89      |
| U-NII-1_5230MHz_high_Mid Ch_46_40MHz BW_n-mode   | 12.07                     | 6.64               | 18.71      | 22.1        | 3.39      |
| U-NII-1_5210MHz_Low Mid Ch_42_80MHz BW_ac-mode   | 11.99                     | 6.64               | 18.63      | 22.1        | 3.47      |
| U-NII-1_5210MHz_Low Mid Ch_42_80MHz BW_ax-mode   | 12.02                     | 6.64               | 18.66      | 22.1        | 3.44      |
| U-NII-2A_5260MHz_low_mid Ch_52_20MHz BW_a-mode   | 12.29                     | 6.64               | 18.93      | 29.1        | 10.17     |
| U-NII-2A_5300MHz_high_Mid Ch_60_20MHz BW_a-mode  | 12.56                     | 6.64               | 19.2       | 29.1        | 9.9       |
| U-NII-2A_5320MHz_High Ch_64_20MHz BW_a-mode      | 12.43                     | 6.64               | 19.07      | 29.1        | 10.03     |
| U-NII-2A_5260MHz_low_mid Ch_52_20MHz BW_n-mode   | 12.07                     | 6.64               | 18.71      | 29.1        | 10.39     |
| U-NII-2A_5300MHz_high_Mid Ch_60_20MHz BW_n-mode  | 12.29                     | 6.64               | 18.93      | 29.1        | 10.17     |
| U-NII-2A_5320MHz_High Ch_64_20MHz BW_n-mode      | 12.21                     | 6.64               | 18.85      | 29.1        | 10.25     |
| U-NII-2A_5270MHz_low_Mid Ch_54_40MHz BW_n-mode   | 12.42                     | 6.64               | 19.06      | 29.1        | 10.04     |
| U-NII-2A_5310MHz_High Ch_62_40MHz BW_n-mode      | 12.47                     | 6.64               | 19.11      | 29.1        | 9.99      |
| U-NII-2A_5290MHz_High_Mid Ch_58_80MHz BW_ac-mode | 12.7                      | 6.64               | 19.34      | 29.1        | 9.76      |
| U-NII-2A_5290MHz_High_Mid Ch_58_80MHz BW_ax-mode | 12.72                     | 6.64               | 19.36      | 29.1        | 9.74      |

Table 19. EIRP, Test Results (UNII-1 and 2A)

| U-NII SubBand 2C FCC PWR                      | Conducted Power Sum (dBm) | Antenna Gain (dBi) | EIRP (dBm) | Limit (dBm) | Margin dB |
|-----------------------------------------------|---------------------------|--------------------|------------|-------------|-----------|
| U-NII-2C_5500MHz_Low Ch_100_20MHz BW_a-mode   | 11.72                     | 6.64               | 18.36      | 29.1        | 10.74     |
| U-NII-2C_5600MHz_Mid Ch_120_20MHz BW_a-mode   | 11.4                      | 6.64               | 18.04      | 29.1        | 11.06     |
| U-NII-2C_5720MHz_High Ch_144_20MHz BW_a-mode  | 12.29                     | 6.64               | 18.93      | 29.1        | 10.17     |
| U-NII-2C_5500MHz_Low Ch_100_20MHz BW_n-mode   | 11.56                     | 6.64               | 18.2       | 29.1        | 10.9      |
| U-NII-2C_5600MHz_Mid Ch_120_20MHz BW_n-mode   | 11.18                     | 6.64               | 17.82      | 29.1        | 11.28     |
| U-NII-2C_5720MHz_High Ch_144_20MHz BW_n-mode  | 12.13                     | 6.64               | 18.77      | 29.1        | 10.33     |
| U-NII-2C_5510MHz_Low Ch_102_40MHz BW_n-mode   | 11.83                     | 6.64               | 18.47      | 29.1        | 10.63     |
| U-NII-2C_5590MHz_Mid Ch_118_40MHz BW_n-mode   | 11.44                     | 6.64               | 18.08      | 29.1        | 11.02     |
| U-NII-2C_5710MHz_High Ch_142_40MHz BW_n-mode  | 12.36                     | 6.64               | 19         | 29.1        | 10.1      |
| U-NII-2C_5510MHz_Low Ch_102_40MHz BW_ac-mode  | 11.85                     | 6.64               | 18.49      | 29.1        | 10.61     |
| U-NII-2C_5590MHz_Mid Ch_118_40MHz BW_ac-mode  | 11.44                     | 6.64               | 18.08      | 29.1        | 11.02     |
| U-NII-2C_5710MHz_High Ch_142_40MHz BW_ac-mode | 12.43                     | 6.64               | 19.07      | 29.1        | 10.03     |
| U-NII-2C_5530MHz_Low Ch_106_80MHz BW_ac-mode  | 11.66                     | 6.64               | 18.3       | 29.1        | 10.8      |
| U-NII-2C_5610MHz_Mid Ch_122_80MHz BW_ac-mode  | 11.55                     | 6.64               | 18.19      | 29.1        | 10.91     |
| U-NII-2C_5690MHz_High Ch_138_80MHz BW_ac-mode | 12.04                     | 6.64               | 18.68      | 29.1        | 10.42     |
| U-NII-2C_5530MHz_Low Ch_106_80MHz BW_ax-mode  | 13.44                     | 6.64               | 20.08      | 29.1        | 9.02      |
| U-NII-2C_5610MHz_Mid Ch_122_80MHz BW_ax-mode  | 13.14                     | 6.64               | 19.78      | 29.1        | 9.32      |
| U-NII-2C_5690MHz_High Ch_138_80MHz BW_ax-mode | 12.84                     | 6.64               | 19.48      | 29.1        | 9.62      |

Table 20. EIRP, Test Results (UNII-2C)

| U-NII SubBand 3 PWR                                        | Conducted Power Sum (dBm) | Directional Array Antenna Gain (dBi) | EIRP (dBm) | Limit (dBm) | Margin dB |
|------------------------------------------------------------|---------------------------|--------------------------------------|------------|-------------|-----------|
| U-NII-3_5745MHz_Low Ch_149_20MHz BW_a-mode                 | 9.95                      | 6.64                                 | 16.59      | 30          | 20.05     |
| U-NII-3_5785MHz_Mid Ch_157_20MHz BW_a-mode                 | 9.81                      | 6.64                                 | 16.45      | 30          | 20.19     |
| U-NII-3_5825MHz_High Ch_165_20MHz BW_a-mode                | 9.58                      | 6.64                                 | 16.22      | 30          | 20.42     |
| U-NII-3_5745MHz_Low Ch_149_20MHz BW_n-mode                 | 9.83                      | 6.64                                 | 16.47      | 30          | 20.17     |
| U-NII-3_5785MHz_Mid Ch_157_20MHz BW_n-mode                 | 9.58                      | 6.64                                 | 16.22      | 30          | 20.42     |
| U-NII-3_5825MHz_High Ch_165_20MHz BW_n-mode                | 9.42                      | 6.64                                 | 16.06      | 30          | 20.58     |
| U-NII-3_5755MHz_Low Ch_151_40MHz BW_n-mode                 | 10.22                     | 6.64                                 | 16.86      | 30          | 19.78     |
| U-NII-3_5795MHz_High_Mid Ch_159_40MHz BW_n-mode            | 9.85                      | 6.64                                 | 16.49      | 30          | 20.15     |
| U-NII-3_5775MHz_High_Mid Ch_155_80MHz BW_ac-mode           | 10.26                     | 6.64                                 | 16.9       | 30          | 19.74     |
| U-NII-3_5775MHz_High_Mid Ch_155_80MHz BW_ax-mode           | 10.2                      | 6.64                                 | 16.84      | 30          | 19.8      |
| Straddle Ch_ U-NII-2C_5720MHz_High Ch_144_20MHz BW_a-mode  | 4.68                      | 6.64                                 | 11.32      | 30          | 19.8      |
| Straddle Ch_ U-NII-2C_5720MHz_High Ch_144_20MHz BW_n-mode  | 4.93                      | 6.64                                 | 11.57      | 30          | 19.8      |
| Straddle Ch_ U-NII-2C_5720MHz_High Ch_144_20MHz BW_ac-mode | 4.89                      | 6.64                                 | 11.53      | 30          | 19.8      |
| Straddle Ch_ U-NII-2C_5710MHz_High Ch_142_40MHz BW_n-mode  | 0.73                      | 6.64                                 | 7.37       | 30          | 19.8      |
| Straddle Ch_ U-NII-2C_5710MHz_High Ch_142_40MHz BW_ac-mode | 0.72                      | 6.64                                 | 7.36       | 30          | 19.8      |
| Straddle Ch_ U-NII-2C_5690MHz_High Ch_138_80MHz BW_ac-mode | -3.46                     | 6.64                                 | 3.18       | 30          | 19.8      |

Table 21. EIRP, Test Results (UNII-3)

## Electromagnetic Compatibility Criteria for Intentional Radiators

### §15.407(a)(1) Maximum Power Spectral Density

**Test Requirements:**

**§15.407(a)(1)(iv):** For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**§15.407(a)(2):** For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**§15.407(a)(3)(i):** For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

**Test Procedure:**

The EUT was connected to a spectrum analyzer through a cable and attenuator. Measurements were taken with the EUT set to transmit continuously on its low, mid, and high channels. Its power was measured according KDB 789033 D02 General UNII Test Procedures v02.

**Test Results:**

The EUT as tested is compliant with the requirements of this section. The worst-case tabular data for each UNII band is shown below. Due to the large number of individual plots for each measurement, they are contained in a separate appendix.

Straddle channels which have transmissions that extend from U-NII-2C into the U-NII-3 band are presented in the U-NII-3 data table.

**Test Engineer(s):**

Bryan Taylor

**Test Date(s):**

5/4/2022 – 8/31/2022

| U-NII SubBand 1 and 2A FCC SD                   | Port 1<br>(dBm) | Port 2<br>(dBm) | Sum<br>(dBm) | Limit<br>(dBm) | Margin<br>dB |
|-------------------------------------------------|-----------------|-----------------|--------------|----------------|--------------|
| U-NII-1_5180MHz_Low Ch_36_20MHz BW_a-mode       | -1.41           | -1.26           | 1.68         | 11             | 9.32         |
| U-NII-1_5200MHz_low_mid Ch_40_20MHz BW_a-mode   | -1.02           | -0.79           | 2.10         | 11             | 8.90         |
| U-NII-1_5240MHz_high_mid Ch_48_20MHz BW_a-mode  | -0.49           | -0.64           | 2.44         | 11             | 8.56         |
| U-NII-1_5180MHz_Low Ch_36_20MHz BW_n-mode       | -1.37           | -1.46           | 1.60         | 11             | 9.40         |
| U-NII-1_5200MHz_low_mid Ch_40_20MHz BW_n-mode   | -1.29           | -1.18           | 1.78         | 11             | 9.22         |
| U-NII-1_5240MHz_high_mid Ch_48_20MHz BW_n-mode  | -0.88           | -0.51           | 2.32         | 11             | 8.68         |
| U-NII-1_5190MHz_Low Ch_38_40MHz BW_n-mode       | -3.90           | -4.02           | -0.95        | 11             | 11.95        |
| U-NII-1_5230MHz_high_mid Ch_46_40MHz BW_n-mode  | -3.47           | -3.61           | -0.53        | 11             | 11.53        |
| U-NII-1_5210MHz_Low mid Ch_42_80MHz BW_ac-mode  | -6.76           | -6.90           | -3.82        | 11             | 14.82        |
| U-NII-1_5210MHz_Low mid Ch_42_80MHz BW_ax-mode  | -6.92           | -6.96           | -3.93        | 11             | 14.93        |
| U-NII-2A_5260MHz_low_mid Ch_52_20MHz BW_a-mode  | 0.55            | 0.35            | 2.56         | 11             | 8.44         |
| U-NII-2A_5280MHz_high_mid Ch_56_20MHz BW_a-mode | 0.46            | 0.41            | 2.58         | 11             | 8.42         |
| U-NII-2A_5320MHz_High Ch_64_20MHz BW_a-mode     | 0.03            | 0.45            | 2.78         | 11             | 8.22         |
| U-NII-2A_5260MHz_low_mid Ch_52_20MHz BW_n-mode  | 0.70            | 1.02            | 2.16         | 11             | 8.84         |
| U-NII-2A_5280MHz_high_mid Ch_56_20MHz BW_n-mode | 0.49            | 0.65            | 2.44         | 11             | 8.56         |
| U-NII-2A_5320MHz_High Ch_64_20MHz BW_n-mode     | 0.60            | 1.12            | 2.16         | 11             | 8.84         |
| U-NII-2A_5270MHz_low_mid Ch_54_40MHz BW_n-mode  | 3.84            | 3.53            | -0.67        | 11             | 11.67        |
| U-NII-2A_5310MHz_High Ch_62_40MHz BW_n-mode     | 3.33            | 3.70            | -0.50        | 11             | 11.50        |
| U-NII-2A_5290MHz_High Ch_58_80MHz BW_ac-mode    | 6.29            | 6.62            | -3.44        | 11             | 14.44        |
| U-NII-2A_5290MHz_High Ch_58_80MHz BW_ax-mode    | 6.57            | 6.65            | -3.60        | 11             | 14.60        |

**Table 22. Power Spectral Density, Test Results (UNII-1 and 2A)**

| U-NII SubBand 2C FCC SD                       | Port 1 (dBm) | Port 2 (dBm) | Sum (dBm) | Limit (dBm) | Margin dB |
|-----------------------------------------------|--------------|--------------|-----------|-------------|-----------|
| U-NII-2C_5500MHz_Low Ch_100_20MHz BW_a-mode   | -2.30        | -2.15        | 0.79      | 11          | 10.21     |
| U-NII-2C_5600MHz_Mid Ch_120_20MHz BW_a-mode   | -2.65        | -2.69        | 0.34      | 11          | 10.66     |
| U-NII-2C_5720MHz_High Ch_144_20MHz BW_a-mode  | -1.84        | -1.80        | 1.19      | 11          | 9.81      |
| U-NII-2C_5500MHz_Low Ch_100_20MHz BW_n-mode   | -2.76        | -2.86        | 0.20      | 11          | 10.80     |
| U-NII-2C_5600MHz_Mid Ch_120_20MHz BW_n-mode   | -3.08        | -3.22        | -0.14     | 11          | 11.14     |
| U-NII-2C_5720MHz_High Ch_144_20MHz BW_n-mode  | -2.18        | -2.10        | 0.87      | 11          | 10.13     |
| U-NII-2C_5500MHz_Low Ch_100_20MHz BW_ac-mode  | -0.54        | -0.98        | 2.26      | 11          | 77.26     |
| U-NII-2C_5600MHz_Mid Ch_120_20MHz BW_ac-mode  | -3.04        | -3.11        | -0.07     | 11          | 11.07     |
| U-NII-2C_5720MHz_High Ch_144_20MHz BW_ac-mode | -2.19        | -2.18        | 0.83      | 11          | 10.17     |
| U-NII-2C_5510MHz_Low Ch_102_40MHz BW_n-mode   | -5.51        | -5.64        | -2.56     | 11          | 13.56     |
| U-NII-2C_5590MHz_Mid Ch_118_40MHz BW_n-mode   | -5.97        | -6.04        | -3.00     | 11          | 14.00     |
| U-NII-2C_5710MHz_High Ch_142_40MHz BW_n-mode  | -4.94        | -4.98        | -1.95     | 11          | 12.95     |
| U-NII-2C_5510MHz_Low Ch_102_40MHz BW_ac-mode  | -5.56        | -5.41        | -2.47     | 11          | 13.47     |
| U-NII-2C_5590MHz_Mid Ch_118_40MHz BW_ac-mode  | -5.78        | -5.94        | -2.85     | 11          | 13.85     |
| U-NII-2C_5710MHz_High Ch_142_40MHz BW_ac-mode | -4.91        | -4.97        | -1.93     | 11          | 12.93     |
| U-NII-2C_5530MHz_Low Ch_106_80MHz BW_ac-mode  | -8.88        | -8.88        | -5.87     | 11          | 16.87     |
| U-NII-2C_5610MHz_Mid Ch_122_80MHz BW_ac-mode  | -9.02        | -8.88        | -5.94     | 11          | 16.94     |
| U-NII-2C_5690MHz_High Ch_138_80MHz BW_ac-mode | -8.63        | -8.65        | -5.63     | 11          | 16.63     |
| U-NII-2C_5530MHz_Low Ch_106_80MHz BW_ax-mode  | -6.76        | -6.91        | -3.83     | 11          | 14.83     |
| U-NII-2C_5610MHz_Mid Ch_122_80MHz BW_ax-mode  | -6.93        | -7.53        | -4.21     | 11          | 15.21     |
| U-NII-2C_5690MHz_High Ch_138_80MHz BW_ax-mode | -7.09        | -7.44        | -4.25     | 11          | 15.25     |

Table 23. Power Spectral Density, Test Results (UNII-2C)

| U-NII SubBand 3 SD                                          | Port 1 (dBm) | Port 2 (dBm) | Sum (dBm) | Limit (dBm) | Margin dB |
|-------------------------------------------------------------|--------------|--------------|-----------|-------------|-----------|
| U-NII-3_5745MHz_Low Ch_149_20MHz BW_a-mode                  | -6.42        | -7.18        | -3.77     | 30          | 33.77     |
| U-NII-3_5785MHz_Mid Ch_157_20MHz BW_a-mode                  | -6.43        | -7.37        | -3.86     | 30          | 33.86     |
| U-NII-3_5825MHz_High Ch_165_20MHz BW_a-mode                 | -6.47        | -7.43        | -3.91     | 30          | 33.91     |
| U-NII-3_5745MHz_Low Ch_149_20MHz BW_n-mode                  | -6.84        | -7.53        | -4.16     | 30          | 34.16     |
| U-NII-3_5785MHz_Mid Ch_157_20MHz BW_n-mode                  | -6.61        | -7.76        | -4.13     | 30          | 34.13     |
| U-NII-3_5825MHz_High Ch_165_20MHz BW_n-mode                 | -7.04        | -8.21        | -4.57     | 30          | 34.57     |
| U-NII-3_5755MHz_Low Ch_151_40MHz BW_n-mode                  | -9.64        | -10.21       | -6.90     | 30          | 36.90     |
| U-NII-3_5795MHz_High_Mid Ch_159_40MHz BW_n-mode             | -9.82        | -10.47       | -7.12     | 30          | 37.12     |
| U-NII-3_5775MHz_High_Mid Ch_155_80MHz BW_ac-mode            | -12.90       | -13.73       | -10.29    | 30          | 40.29     |
| U-NII-3_5775MHz_High_Mid Ch_155_80MHz BW_ax-mode            | -12.80       | -13.60       | -10.17    | 30          | 40.17     |
| Straddle Ch_ U-NII-2C_5720MHz_High Ch_144_20MHz BW_a-mode   | -1.84        | -1.80        | 1.19      | 30          | 28.81     |
| *Straddle Ch_ U-NII-2C_5720MHz_High Ch_144_20MHz BW_n-mode  | -2.18        | -2.10        | 0.87      | 30          | 29.13     |
| *Straddle Ch_ U-NII-2C_5720MHz_High Ch_144_20MHz BW_ac-mode | -2.19        | -2.18        | 0.83      | 30          | 29.17     |
| *Straddle Ch_ U-NII-2C_5710MHz_High Ch_142_40MHz BW_n-mode  | -2.19        | -2.18        | 0.83      | 30          | 29.17     |
| *Straddle Ch_ U-NII-2C_5710MHz_High Ch_142_40MHz BW_ac-mode | -4.91        | -4.97        | -1.93     | 30          | 31.93     |
| *Straddle Ch_ U-NII-2C_5690MHz_High Ch_138_80MHz BW_ac-mode | -8.63        | -8.65        | -5.63     | 30          | 35.63     |
| *Straddle Ch_ U-NII-2C_5690MHz_High Ch_138_80MHz BW_ax-mode | -7.09        | -7.44        | -4.25     | 30          | 34.25     |

\*The straddle channel results shown are the PSD measurements from the UNII-2C band which were measured with a 1MHz RBW. The actual PSD results for just the portion of the signal extending into the UNII-3 band would be lower (and pass with a higher margin) than the values shown in this table since they would be measured with a 500kHz RBW and compared to a higher limit (30dBm/500kHz for UNII-3 vs 11dBm/MHz for UNII-2C).

**Table 24. Power Spectral Density, Test Results (UNII-3)**

**Electromagnetic Compatibility Criteria for Intentional Radiators****RSS-247 (6)****EIRP Spectral Density**

**Test Requirements:** §6.2.1.1 (5150 – 5250MHz): For other devices, the maximum e.i.r.p. shall not exceed 200 mW or  $10 + 10 \log_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

**Test Procedure:** The maximum summed conducted power spectral density (across all transmit ports) was added to the antenna gain to arrive at the EIRP spectral density. The antenna gain used was the worst case directional gain calculated per KDB 662911 D01 for two equal gain antennas with correlated signals; 6.64dBi in this case.

**Test Results:** The EUT as tested is compliant with the requirements of this section. The worst-case tabular data for each UNII band is shown below. Due to the large number of individual plots for each measurement, they are contained in a separate appendix.

Straddle channels which have transmissions that extend from U-NII-2C into the U-NII-3 band are presented in the U-NII-3 data table.

**Test Engineer(s):** Bryan Taylor

**Test Date(s):** 5/4/2022 – 8/31/2022

| U-NII SubBand 1 and 2A FCC SD                  | Conducted Power Spectral Density Sum (dBm) | Antenna Gain (dBi) | EIRP Spectral Density (dBm) | Limit (dBm) | Margin dB |
|------------------------------------------------|--------------------------------------------|--------------------|-----------------------------|-------------|-----------|
| U-NII-1_5180MHz_Low Ch_36_20MHz BW_a-mode      | 1.68                                       | 6.64               | 8.32                        | 10          | 1.68      |
| U-NII-1_5200MHz_low_mid Ch_40_20MHz BW_a-mode  | 2.1                                        | 6.64               | 8.74                        | 10          | 1.26      |
| U-NII-1_5240MHz_high_mid Ch_48_20MHz BW_a-mode | 2.44                                       | 6.64               | 9.08                        | 10          | 0.92      |
| U-NII-1_5180MHz_Low Ch_36_20MHz BW_n-mode      | 1.6                                        | 6.64               | 8.24                        | 10          | 1.76      |
| U-NII-1_5200MHz_low_mid Ch_40_20MHz BW_n-mode  | 1.78                                       | 6.64               | 8.42                        | 10          | 1.58      |
| U-NII-1_5240MHz_high_mid Ch_48_20MHz BW_n-mode | 2.32                                       | 6.64               | 8.96                        | 10          | 1.04      |
| U-NII-1_5190MHz_Low Ch_38_40MHz BW_n-mode      | -0.95                                      | 6.64               | 5.69                        | 10          | 4.31      |
| U-NII-1_5230MHz_high_mid Ch_46_40MHz BW_n-mode | -0.53                                      | 6.64               | 6.11                        | 10          | 3.89      |
| U-NII-1_5210MHz_Low mid Ch_42_80MHz BW_ac-mode | -3.82                                      | 6.64               | 2.82                        | 10          | 7.18      |
| U-NII-1_5210MHz_Low mid Ch_42_80MHz BW_ax-mode | -3.93                                      | 6.64               | 2.71                        | 10          | 7.29      |

Table 25. EIRP Spectral Density, Test Results (UNII-1 and 2A)

| U-NII SubBand 2C FCC SD                       | Sum (dBm) | Antenna Gain (dBi) | EIRP Spectral Density (dBm) | Limit (dBm) | Margin dB |
|-----------------------------------------------|-----------|--------------------|-----------------------------|-------------|-----------|
| U-NII-2C_5500MHz_Low Ch_100_20MHz BW_a-mode   | 0.79      | 6.64               | 7.43                        | 11          | 3.57      |
| U-NII-2C_5600MHz_Mid Ch_120_20MHz BW_a-mode   | 0.34      | 6.64               | 6.98                        | 11          | 4.02      |
| U-NII-2C_5720MHz_High Ch_144_20MHz BW_a-mode  | 1.19      | 6.64               | 7.83                        | 11          | 3.17      |
| U-NII-2C_5500MHz_Low Ch_100_20MHz BW_n-mode   | 0.2       | 6.64               | 6.84                        | 11          | 4.16      |
| U-NII-2C_5600MHz_Mid Ch_120_20MHz BW_n-mode   | -0.14     | 6.64               | 6.5                         | 11          | 4.5       |
| U-NII-2C_5720MHz_High Ch_144_20MHz BW_n-mode  | 0.87      | 6.64               | 7.51                        | 11          | 3.49      |
| U-NII-2C_5500MHz_Low Ch_100_20MHz BW_ac-mode  | 2.26      | 6.64               | 8.9                         | 11          | 2.1       |
| U-NII-2C_5600MHz_Mid Ch_120_20MHz BW_ac-mode  | -0.07     | 6.64               | 6.57                        | 11          | 4.43      |
| U-NII-2C_5720MHz_High Ch_144_20MHz BW_ac-mode | 0.83      | 6.64               | 7.47                        | 11          | 3.53      |
| U-NII-2C_5510MHz_Low Ch_102_40MHz BW_n-mode   | -2.56     | 6.64               | 4.08                        | 11          | 6.92      |
| U-NII-2C_5590MHz_Mid Ch_118_40MHz BW_n-mode   | -3        | 6.64               | 3.64                        | 11          | 7.36      |
| U-NII-2C_5710MHz_High Ch_142_40MHz BW_n-mode  | -1.95     | 6.64               | 4.69                        | 11          | 6.31      |
| U-NII-2C_5510MHz_Low Ch_102_40MHz BW_ac-mode  | -2.47     | 6.64               | 4.17                        | 11          | 6.83      |
| U-NII-2C_5590MHz_Mid Ch_118_40MHz BW_ac-mode  | -2.85     | 6.64               | 3.79                        | 11          | 7.21      |
| U-NII-2C_5710MHz_High Ch_142_40MHz BW_ac-mode | -1.93     | 6.64               | 4.71                        | 11          | 6.29      |
| U-NII-2C_5530MHz_Low Ch_106_80MHz BW_ac-mode  | -5.87     | 6.64               | 0.77                        | 11          | 10.23     |
| U-NII-2C_5610MHz_Mid Ch_122_80MHz BW_ac-mode  | -5.94     | 6.64               | 0.7                         | 11          | 10.3      |
| U-NII-2C_5690MHz_High Ch_138_80MHz BW_ac-mode | -5.63     | 6.64               | 1.01                        | 11          | 9.99      |
| U-NII-2C_5530MHz_Low Ch_106_80MHz BW_ax-mode  | -3.83     | 6.64               | 2.81                        | 11          | 8.19      |
| U-NII-2C_5610MHz_Mid Ch_122_80MHz BW_ax-mode  | -4.21     | 6.64               | 2.43                        | 11          | 8.57      |
| U-NII-2C_5690MHz_High Ch_138_80MHz BW_ax-mode | -4.25     | 6.64               | 2.39                        | 11          | 8.61      |

Table 26. EIRP Spectral Density, Test Results (UNII-2C)

| U-NII SubBand 3 SD                                          | Conducted Power Spectral Density Sum (dBm) | Directional Array Antenna Gain (dBi) | EIRP Spectral Density (dBm) | Limit (dBm) | Margin dB |
|-------------------------------------------------------------|--------------------------------------------|--------------------------------------|-----------------------------|-------------|-----------|
| U-NII-3_5745MHz_Low Ch_149_20MHz BW_a-mode                  | -3.77                                      | 6.64                                 | 2.87                        | 30          | 27.13     |
| U-NII-3_5785MHz_Mid Ch_157_20MHz BW_a-mode                  | -3.86                                      | 6.64                                 | 2.78                        | 30          | 27.22     |
| U-NII-3_5825MHz_High Ch_165_20MHz BW_a-mode                 | -3.91                                      | 6.64                                 | 2.73                        | 30          | 27.27     |
| U-NII-3_5745MHz_Low Ch_149_20MHz BW_n-mode                  | -4.16                                      | 6.64                                 | 2.48                        | 30          | 27.52     |
| U-NII-3_5785MHz_Mid Ch_157_20MHz BW_n-mode                  | -4.13                                      | 6.64                                 | 2.51                        | 30          | 27.49     |
| U-NII-3_5825MHz_High Ch_165_20MHz BW_n-mode                 | -4.57                                      | 6.64                                 | 2.07                        | 30          | 27.93     |
| U-NII-3_5755MHz_Low Ch_151_40MHz BW_n-mode                  | -6.9                                       | 6.64                                 | -0.26                       | 30          | 30.26     |
| U-NII-3_5795MHz_High_Mid Ch_159_40MHz BW_n-mode             | -7.12                                      | 6.64                                 | -0.48                       | 30          | 30.48     |
| U-NII-3_5775MHz_High_Mid Ch_155_80MHz BW_ac-mode            | -10.29                                     | 6.64                                 | -3.65                       | 30          | 33.65     |
| U-NII-3_5775MHz_High_Mid Ch_155_80MHz BW_ax-mode            | -10.17                                     | 6.64                                 | -3.53                       | 30          | 33.53     |
| *Straddle Ch_ U-NII-2C_5720MHz_High Ch_144_20MHz BW_a-mode  | 4.68                                       | 6.64                                 | 11.32                       | 30          | 18.68     |
| *Straddle Ch_ U-NII-2C_5720MHz_High Ch_144_20MHz BW_n-mode  | 4.93                                       | 6.64                                 | 11.57                       | 30          | 18.43     |
| *Straddle Ch_ U-NII-2C_5720MHz_High Ch_144_20MHz BW_ac-mode | 4.89                                       | 6.64                                 | 11.53                       | 30          | 18.47     |
| *Straddle Ch_ U-NII-2C_5710MHz_High Ch_142_40MHz BW_n-mode  | 0.73                                       | 6.64                                 | 7.37                        | 30          | 22.63     |
| *Straddle Ch_ U-NII-2C_5710MHz_High Ch_142_40MHz BW_ac-mode | 0.72                                       | 6.64                                 | 7.36                        | 30          | 22.64     |
| *Straddle Ch_ U-NII-2C_5690MHz_High Ch_138_80MHz BW_ac-mode | -3.46                                      | 6.64                                 | 3.18                        | 30          | 26.82     |
| *Straddle Ch_ U-NII-2C_5690MHz_High Ch_138_80MHz BW_ax-mode | -4.25                                      | 6.64                                 | 2.39                        | 30          | 19.8      |

\*The straddle channel results shown are the PSD measurements from the UNII-2C band which were measured with a 1MHz RBW. The actual PSD results for just the portion of the signal extending into the UNII-3 band would be lower (and pass with a higher margin) than the values shown in this table since they would be measured with a 500kHz RBW and compared to a higher limit (30dBm/500kHz for UNII-3 vs 11dBm/MHz for UNII-2C).

Table 27. EIRP Spectral Density, Test Results (UNII-3)

## Electromagnetic Compatibility Criteria for Intentional Radiators

### §15.407(b)(1 – 4, 9, 10) Undesirable Emissions

**Test Requirements:** § 15.407(b)(1): For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

§ 15.407(b)(2): For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

§ 15.407(b)(3): For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz

§ 15.407(b)(4): For transmitters operating solely in the 5.725-5.850 GHz band:

All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge

§ 15.407(b)(9): Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in Section 15.207.

§ 15.407(b)(10): The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

**Test Procedure:** Unwanted emission measurements were performed per ANSI C63.10: 2013 Section 12.7. Measurements for unwanted emissions in the restricted bands were performed via a direct connection to the antenna ports per 12.7.2 using peak and average detection.

Additionally, the cabinet emissions measurements were performed in a 10m semi-anechoic chamber. The EUT was placed on a non-conducting table on a turntable in a chamber. The turntable was rotated 360 degrees, the EUT was oriented through its three orthogonal axes, and the receive antenna height was varied in order to maximize emissions. The -27dBm/MHz limit was converted to field strength using the formula shown in ANSI C63.27 Section 12.7.2

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ (for a measurement distance of 3m)}$$

**Test Results:** The EUT was compliant with the requirements of this section. The worst-case tabular data for each UNII band is shown below. Due to the large number of individual plots for each measurement, they are contained in a separate appendix.

The antenna gain specification sheet indicated a worst case gain of 3.64dBi. During the testing the conducted scans were performed with either 3.5dBi for the gain or the default 2dBi from ANSI C63.10. Due to the high margin on the plots the additional gain in all cases still demonstrates a passing result when the array gain is applied.

A table is presented showing the worst-case restricted band edge measurements for transmissions adjacent to the restricted bands of 4.5 – 5.15GHz and 5.35 – 5.46GHz with the directional array gain included. Similarly, a table with the worst-case emissions demonstrating compliance with the -27dBm/MHz EIRP requirement (with the directional array gain applied) is also provided.

**Test Engineer(s):** Bryan Taylor, James Seib, Sergio Gutierrez

**Test Date(s):** 5/4/2022 – 8/31/2022

| TX Port | TX Mode       | Ch. | Freq. (GHz) | Avg Amplitude (dBuV/m) | Avg Limit (dBuV/m) | Avg Margin (dBuV/m) | Peak Amplitude (dBuV/m) | Peak Limit (dBuV/m) | Peak Margin (dBuV/m) | TX Antenna Gain *(dBi) |
|---------|---------------|-----|-------------|------------------------|--------------------|---------------------|-------------------------|---------------------|----------------------|------------------------|
| 1       | 802.11n       | 36  | 5.149       | 34.53                  | 54                 | 19.47               | 46.53                   | 74                  | 27.47                | 6.64                   |
| 2       | 802.11n       | 36  | 5.149       | 34.9                   | 54                 | 19.1                | 48.13                   | 74                  | 25.87                | 6.64                   |
| 1       | 802.11a       | 36  | 5.15        | 34.74                  | 54                 | 19.26               | 46.39                   | 74                  | 27.61                | 6.64                   |
| 2       | 802.11a       | 36  | 5.15        | 34.95                  | 54                 | 19.05               | 46.49                   | 74                  | 27.51                | 6.64                   |
| 1       | 802.11n(40)   | 38  | 5.149       | 49.98                  | 54                 | 4.02                | 63.92                   | 74                  | 10.08                | 6.64                   |
| 2       | 802.11n(40)   | 38  | 5.149       | 44.6                   | 54                 | 9.4                 | 57.15                   | 74                  | 16.85                | 6.64                   |
| 1       | 802.11ac (80) | 42  | 5.149       | 52.71                  | 54                 | 1.29                | 63.59                   | 74                  | 10.41                | 6.64                   |
| 2       | 802.11ac (80) | 42  | 5.149       | 47.22                  | 54                 | 6.78                | 61.7                    | 74                  | 12.3                 | 6.64                   |
| 1       | 802.11ax (80) | 42  | 5.149       | 52.51                  | 54                 | 1.49                | 64.61                   | 74                  | 9.39                 | 6.64                   |
| 2       | 802.11ax (80) | 42  | 5.149       | 47.32                  | 54                 | 6.68                | 59.4                    | 74                  | 14.6                 | 6.64                   |

\*These measurements were performed using the conducted methodology from ANSI C63.10 section 12.7.2. The antenna gain used is the directional array gain which was calculated per KDB 662911 D01 Section F.2.a.(i) for correlated signals with equal antenna gains.

**Table 28. UNII-1 Worst Case Restricted Band Edge Emissions**

| TX Port | TX Mode      | Channel | Frequency (GHz) | Peak Amplitude (dBm/MHz) | Limit (dBm/MHz) | Peak Margin (dBuV/m) | TX Antenna Gain *(dBi) |
|---------|--------------|---------|-----------------|--------------------------|-----------------|----------------------|------------------------|
| 1       | 802.11a      | 36      | 5.138           | -41.82                   | -27             | 14.82                | 6.64                   |
| 2       | 802.11a      | 36      | 5.032           | -41.98                   | -27             | 14.98                | 6.64                   |
| 1       | 802.11n      | 36      | 5.13            | -41.82                   | -27             | 14.82                | 6.64                   |
| 2       | 802.11n      | 36      | 5.024           | -41.9                    | -27             | 14.9                 | 6.64                   |
| 1       | 802.11n (40) | 38      | 5.15            | -31.45                   | -27             | 4.45                 | 6.64                   |
| 2       | 802.11n (40) | 38      | 5.147           | -37.77                   | -27             | 10.77                | 6.64                   |
| 1       | 802.11ac(80) | 42      | 5.144           | -31.29                   | -27             | 4.29                 | 6.64                   |
| 2       | 802.11ac(80) | 42      | 5.148           | -36.16                   | -27             | 9.16                 | 6.64                   |
| 1       | 802.11ax(80) | 42      | 5.147           | -31.73                   | -27             | 4.73                 | 6.64                   |
| 2       | 802.11ax(80) | 42      | 5.147           | -34.18                   | -27             | 7.18                 | 6.64                   |

\* The antenna gain used is the directional array gain which was calculated per KDB 662911 D01 Section F.2.a.(i) for correlated signals with equal antenna gains.

**Table 29. UNII-1 Worst Case -27dBm/MHz EIRP Emissions**

| TX Port | TX Mode       | Ch. | Freq. (GHz) | Avg Amplitude (dBuV/m) | Avg Limit (dBuV/m) | Avg Margin (dBuV/m) | Peak Amplitude (dBuV/m) | Peak Limit (dBuV/m) | Peak Margin (dBuV/m) | TX Antenna Gain *(dBi) |
|---------|---------------|-----|-------------|------------------------|--------------------|---------------------|-------------------------|---------------------|----------------------|------------------------|
| 1       | 802.11ac (80) | 58  | 5.35        | 52.71                  | 54                 | 1.29                | 66.73                   | 74                  | 7.27                 | 6.64                   |
| 2       | 802.11ac (80) | 58  | 5.35        | 52.85                  | 54                 | 1.15                | 60.36                   | 74                  | 13.64                | 6.64                   |
| 1       | 802.11ax (80) | 58  | 5.35        | 52.65                  | 54                 | 1.35                | 65.7                    | 74                  | 8.3                  | 6.64                   |
| 2       | 802.11ax (80) | 58  | 5.35        | 52.65                  | 54                 | 1.35                | 60.73                   | 74                  | 13.27                | 6.64                   |
| 1       | 802.11n(40)   | 62  | 5.35        | 51.14                  | 54                 | 2.86                | 65.61                   | 74                  | 8.39                 | 6.64                   |
| 2       | 802.11n(40)   | 62  | 5.35        | 47.82                  | 54                 | 6.18                | 59.53                   | 74                  | 14.47                | 6.64                   |
| 1       | 802.11a       | 64  | 5.35        | 34.53                  | 54                 | 19.47               | 61.3                    | 74                  | 12.7                 | 6.64                   |
| 2       | 802.11a       | 64  | 5.35        | 34.5                   | 54                 | 19.5                | 62.79                   | 74                  | 11.21                | 6.64                   |
| 1       | 802.11n       | 64  | 5.35        | 37.61                  | 54                 | 16.39               | 61.56                   | 74                  | 12.44                | 6.64                   |
| 2       | 802.11n       | 64  | 5.35        | 36.76                  | 54                 | 17.24               | 61.76                   | 74                  | 12.24                | 6.64                   |

\*These measurements were performed using the conducted methodology from ANSI C63.10 section 12.7.2. The antenna gain used is the directional array gain which was calculated per KDB 662911 D01 Section F.2.a.(i) for correlated signals with equal antenna gains.

**Table 30. UNII-2A Worst Case Restricted Band Edge Emissions**

| TX Port | TX Mode      | Channel | Frequency (GHz) | Peak Amplitude (dBm/MHz) | Limit (dBm/MHz) | Peak Margin (dBuV/m) | TX Antenna Gain *(dBi) |
|---------|--------------|---------|-----------------|--------------------------|-----------------|----------------------|------------------------|
| 1       | 802.11ac(80) | 58      | 5.352           | -29.03                   | -27             | 2.03                 | 6.64                   |
| 2       | 802.11ac(80) | 58      | 5.356           | -29.55                   | -27             | 2.55                 | 6.64                   |
| 1       | 802.11ax(80) | 58      | 5.36            | -28.24                   | -27             | 1.24                 | 6.64                   |
| 2       | 802.11ax(80) | 58      | 5.353           | -33.56                   | -27             | 6.56                 | 6.64                   |
| 1       | 802.11n (40) | 62      | 5.35            | -34.94                   | -27             | 7.94                 | 6.64                   |
| 2       | 802.11n (40) | 62      | 5.35            | -29.16                   | -27             | 2.16                 | 6.64                   |
| 1       | 802.11n      | 64      | 5.45            | -41.55                   | -27             | 14.55                | 6.64                   |
| 2       | 802.11n      | 64      | 5.452           | -41.77                   | -27             | 14.77                | 6.64                   |
| 1       | 802.11a      | 64      | 5.353           | -39.84                   | -27             | 12.84                | 6.64                   |
| 2       | 802.11a      | 64      | 5.424           | -41.36                   | -27             | 14.36                | 6.64                   |

\* The antenna gain used is the directional array gain which was calculated per KDB 662911 D01 Section F.2.a.(i) for correlated signals with equal antenna gains.

**Table 31. UNII-2A Worst Case -27dBm/MHz EIRP Emissions**

| TX Port | TX Mode       | Ch. | Freq. (GHz) | Avg Amplitude (dBuV/m) | Avg Limit (dBuV/m) | Avg Margin (dBuV/m) | Peak Amplitude (dBuV/m) | Peak Limit (dBuV/m) | Peak Margin (dBuV/m) | TX Antenna Gain *(dBi) |
|---------|---------------|-----|-------------|------------------------|--------------------|---------------------|-------------------------|---------------------|----------------------|------------------------|
| 1       | 802.11n       | 100 | 5.459       | 33.22                  | 54                 | 20.78               | 44.85                   | 74                  | 29.15                | 6.64                   |
| 2       | 802.11n       | 100 | 5.352       | 32.58                  | 54                 | 21.42               | 44.61                   | 74                  | 29.39                | 6.64                   |
| 1       | 802.11a       | 100 | 5.405       | 33.63                  | 54                 | 20.37               | 45.32                   | 74                  | 28.68                | 6.64                   |
| 2       | 802.11a       | 100 | 5.405       | 33.04                  | 54                 | 20.96               | 44.91                   | 74                  | 29.09                | 6.64                   |
| 1       | 802.11n (40)  | 102 | 5.457       | 35.42                  | 54                 | 18.58               | 46.15                   | 74                  | 27.85                | 6.64                   |
| 2       | 802.11n (40)  | 102 | 5.459       | 33.51                  | 54                 | 20.49               | 45.57                   | 74                  | 28.43                | 6.64                   |
| 1       | 802.11ac (80) | 106 | 5.458       | 46.5                   | 54                 | 7.5                 | 58.26                   | 74                  | 15.74                | 6.64                   |
| 2       | 802.11ac (80) | 106 | 5.459       | 48.23                  | 55                 | 6.77                | 59.69                   | 75                  | 15.31                | 6.64                   |
| 1       | 802.11ax (80) | 106 | 5.459       | 48.62                  | 56                 | 7.38                | 59                      | 76                  | 17                   | 6.64                   |
| 2       | 802.11ax (80) | 106 | 5.459       | 47.69                  | 57                 | 9.31                | 58.19                   | 77                  | 18.81                | 6.64                   |

\*These measurements were performed using the conducted methodology from ANSI C63.10 section 12.7.2. The antenna gain used is the directional array gain which was calculated per KDB 662911 D01 Section F.2.a.(i) for correlated signals with equal antenna gains.

**Table 32. UNII-2C Worst Case Restricted Band Edge Emissions**

| TX Port | TX Mode      | Channel | Frequency (GHz) | Peak Amplitude (dBm/MHz) | Limit (dBm/MHz) | Peak Margin (dBuV/m) | TX Antenna *Gain (dBi) |
|---------|--------------|---------|-----------------|--------------------------|-----------------|----------------------|------------------------|
| 1       | 802.11a      | 100     | 5.376           | -41.61                   | -27             | 14.61                | 6.64                   |
| 2       | 802.11a      | 100     | 5.376           | -41.93                   | -27             | 14.93                | 6.64                   |
| 1       | 802.11n      | 100     | 5.759           | -40.72                   | -27             | 13.72                | 6.64                   |
| 2       | 802.11n      | 100     | 5.76            | -42.09                   | -27             | 15.09                | 6.64                   |
| 1       | 802.11n (40) | 102     | 5.727           | -40.42                   | -27             | 13.42                | 6.64                   |
| 2       | 802.11n (40) | 102     | 5.727           | -41.94                   | -27             | 14.94                | 6.64                   |
| 1       | 802.11ac(80) | 106     | 5.454           | -35.38                   | -27             | 8.38                 | 6.64                   |
| 2       | 802.11ac(80) | 106     | 5.467           | -34.14                   | -27             | 7.14                 | 6.64                   |
| 1       | 802.11ax(80) | 106     | 5.469           | -34.51                   | -27             | 7.51                 | 6.64                   |
| 2       | 802.11ax(80) | 106     | 5.466           | -33.54                   | -27             | 6.54                 | 6.64                   |

\* The antenna gain used is the directional array gain which was calculated per KDB 662911 D01 Section F.2.a.(i) for correlated signals with equal antenna gains.

**Table 33. UNII-2C Worst Case -27dBm/MHz EIRP Emissions**

Note: There are no restricted bands of operation adjacent to UNII-3 band.

| Frequency (Hz) | Meter Reading (dBuV) | RBW (Hz) | Antenna Factor (dBuV) | Cable Factor (dB) | Preamp Factor (dB) | Corrected Measurement (dBuV/m) | Limit 1, FCC 15.407 (dBuV/m) | Margin 1 (dB) |
|----------------|----------------------|----------|-----------------------|-------------------|--------------------|--------------------------------|------------------------------|---------------|
| 30.0E+06       | 34.8                 | 100000   | 22.8                  | 1.16              | -25.16             | 33.6                           | 68.23                        | -34.63        |
| 399.9679E+06   | 31.24                | 100000   | 19.9                  | 4.3               | -25.25             | 30.19                          | 68.23                        | -38.04        |
| 449.7115E+06   | 28.84                | 100000   | 20.8                  | 4.66              | -25.08             | 29.23                          | 68.23                        | -39           |
| 30.0E+06       | 35.17                | 100000   | 22.3                  | 1.16              | -25.16             | 33.47                          | 68.23                        | -34.76        |
| 120.1603E+06   | 37.16                | 100000   | 15.92                 | 2.31              | -25.14             | 30.25                          | 68.23                        | -37.98        |
| 236.7468E+06   | 32.31                | 100000   | 15.77                 | 3.3               | -25.2              | 26.18                          | 68.23                        | -42.05        |
| 300.4808E+06   | 30.19                | 100000   | 17.6                  | 3.69              | -25.37             | 26.11                          | 68.23                        | -42.12        |
| 2.7163E+09     | 62.41                | 1000000  | 32.28                 | 3.69              | -38.82             | 59.56                          | 68.23                        | -8.67         |
| 2.7436E+09     | 63.13                | 1000000  | 32.22                 | 3.74              | -38.92             | 60.18                          | 68.23                        | -8.05         |
| 5.7676E+09     | 52.71                | 1000000  | 34.54                 | 5.97              | -45.32             | 47.89                          | 68.23                        | -20.34        |
| 12.1426E+09    | 46.86                | 1000000  | 38.6                  | 9.38              | -49.53             | 45.31                          | 68.23                        | -22.92        |
| 15.1122E+09    | 43.1                 | 1000000  | 39.31                 | 11.15             | -48.23             | 45.32                          | 68.23                        | -22.91        |
| 16.3381E+09    | 48.06                | 1000000  | 40.5                  | 11.66             | -52.51             | 47.72                          | 68.23                        | -20.51        |
| 16.3654E+09    | 47.34                | 1000000  | 40.53                 | 11.69             | -52.54             | 47.02                          | 68.23                        | -21.21        |
| 16.3926E+09    | 47.27                | 1000000  | 40.57                 | 11.71             | -52.57             | 46.98                          | 68.23                        | -21.25        |
| 16.4199E+09    | 46.75                | 1000000  | 40.61                 | 11.78             | -52.99             | 46.15                          | 68.23                        | -22.08        |
| 16.4471E+09    | 47.2                 | 1000000  | 40.66                 | 11.85             | -53.55             | 46.17                          | 68.23                        | -22.06        |
| 16.8285E+09    | 47.87                | 1000000  | 41.25                 | 11.16             | -54.57             | 45.71                          | 68.23                        | -22.52        |
| 16.8558E+09    | 47.64                | 1000000  | 41.23                 | 11.22             | -54.43             | 45.66                          | 68.23                        | -22.57        |
| 20.8205E+09    | 28.3                 | 1000000  | 45.2                  | 7.97              | -41.5              | 39.98                          | 68.23                        | -28.25        |
| 26.0032E+09    | 28.04                | 1000000  | 45.82                 | 10.06             | -42.72             | 41.21                          | 68.23                        | -27.02        |
| 31.2212E+09    | 26.23                | 1000000  | 46.84                 | 11.56             | -40.93             | 43.7                           | 68.23                        | -24.53        |
| 36.4038E+09    | 28.39                | 1000000  | 46.5                  | 11.58             | -42.12             | 44.35                          | 68.23                        | -23.88        |

\*denotes average detection was used. Otherwise, peak detection was used.

**Table 34. Worst Case Cabinet Radiation (802.1a, UNII-1, Horizontal Polarity)**

| Frequency (Hz) | Meter Reading (dBuV) | RBW (Hz) | Antenna Factor (dBuV) | Cable Factor (dB) | Preamp Factor (dB) | Corrected Measurement (dBuV/m) | Limit 1, FCC 15.407 (dBuV/m) | Margin 1 (dB) |
|----------------|----------------------|----------|-----------------------|-------------------|--------------------|--------------------------------|------------------------------|---------------|
| 30.0E+06       | 35.17                | 100000   | 22.3                  | 1.16              | -25.16             | 33.47                          | 68.23                        | -34.76        |
| 120.1603E+06   | 37.16                | 100000   | 15.92                 | 2.31              | -25.14             | 30.25                          | 68.23                        | -37.98        |
| 236.7468E+06   | 32.31                | 100000   | 15.77                 | 3.3               | -25.2              | 26.18                          | 68.23                        | -42.05        |
| 300.4808E+06   | 30.19                | 100000   | 17.6                  | 3.69              | -25.37             | 26.11                          | 68.23                        | -42.12        |
| 2.7163E+09     | 68.43                | 1000000  | 32.25                 | 3.69              | -38.82             | 65.55                          | 68.23                        | -2.68         |
| 2.7436E+09     | 70.74                | 1000000  | 32.21                 | 3.74              | -38.92             | 67.77                          | 68.23                        | -0.46         |
| *2.7436E+09    | 27.8                 | 1000000  | 32.21                 | 3.74              | -38.92             | 24.83                          | 68.23                        | -43.4         |
| 3.5337E+09     | 51.28                | 1000000  | 32.89                 | 4.88              | -40.63             | 48.42                          | 68.23                        | -19.81        |
| 15.1122E+09    | 45.97                | 1000000  | 39.29                 | 11.15             | -48.23             | 48.18                          | 68.23                        | -20.05        |
| 15.1394E+09    | 46.17                | 1000000  | 39.31                 | 11.19             | -48.87             | 47.8                           | 68.23                        | -20.43        |
| 16.3381E+09    | 49.85                | 1000000  | 40.48                 | 11.66             | -52.51             | 49.5                           | 68.23                        | -18.73        |
| 16.3654E+09    | 48.66                | 1000000  | 40.52                 | 11.69             | -52.54             | 48.33                          | 68.23                        | -19.9         |
| 16.3926E+09    | 48.53                | 1000000  | 40.55                 | 11.71             | -52.57             | 48.22                          | 68.23                        | -20.01        |
| 16.4199E+09    | 48.62                | 1000000  | 40.6                  | 11.78             | -52.99             | 48.01                          | 68.23                        | -20.22        |
| 16.4471E+09    | 49.05                | 1000000  | 40.66                 | 11.85             | -53.55             | 48.01                          | 68.23                        | -20.22        |
| 17.7276E+09    | 47.04                | 1000000  | 40.58                 | 11.93             | -51.14             | 48.41                          | 68.23                        | -19.82        |
| 17.891E+09     | 47.5                 | 1000000  | 40.49                 | 12.27             | -51.54             | 48.72                          | 68.23                        | -19.51        |

\*denotes average detection was used. Otherwise, peak detection was used.

**Table 35. Worst Case Cabinet Radiation (802.1a, UNII-1, Vertical Polarity)**

| Frequency (Hz) | Meter Reading (dBUV) | RBW (Hz) | Antenna Factor (dBUV) | Cable Factor (dB) | Preamp Factor (dB) | Corrected Measurement (dBUV/m) | Limit 1, FCC 15.407 (dBUV/m) | Margin 1 (dB) |
|----------------|----------------------|----------|-----------------------|-------------------|--------------------|--------------------------------|------------------------------|---------------|
| 30.0E+06       | 34.4                 | 100000   | 22.8                  | 1.16              | -25.16             | 33.2                           | 68.23                        | -35.03        |
| 399.9679E+06   | 30.43                | 100000   | 19.9                  | 4.3               | -25.25             | 29.38                          | 68.23                        | -38.85        |
| 449.7115E+06   | 29.14                | 100000   | 20.8                  | 4.66              | -25.08             | 29.53                          | 68.23                        | -38.7         |
| 2.7163E+09     | 63.81                | 1000000  | 32.28                 | 3.69              | -38.82             | 60.97                          | 68.23                        | -7.26         |
| 2.7436E+09     | 58.57                | 1000000  | 32.22                 | 3.74              | -38.92             | 55.62                          | 68.23                        | -12.61        |
| 5.2772E+09     | 54.68                | 1000000  | 34.1                  | 5.91              | -43.75             | 50.94                          | 68.23                        | -17.29        |
| 5.7676E+09     | 52.98                | 1000000  | 34.54                 | 5.97              | -45.32             | 48.17                          | 68.23                        | -20.06        |
| 12.1426E+09    | 47.38                | 1000000  | 38.6                  | 9.38              | -49.53             | 45.82                          | 68.23                        | -22.41        |
| 16.3381E+09    | 47.62                | 1000000  | 40.5                  | 11.66             | -52.51             | 47.28                          | 68.23                        | -20.95        |
| 16.3654E+09    | 48.16                | 1000000  | 40.53                 | 11.69             | -52.54             | 47.84                          | 68.23                        | -20.39        |
| 16.3926E+09    | 47.32                | 1000000  | 40.57                 | 11.71             | -52.57             | 47.03                          | 68.23                        | -21.2         |
| 16.4199E+09    | 47.13                | 1000000  | 40.61                 | 11.78             | -52.99             | 46.53                          | 68.23                        | -21.7         |
| 16.4471E+09    | 47.51                | 1000000  | 40.66                 | 11.85             | -53.55             | 46.47                          | 68.23                        | -21.76        |
| 39.5064E+09    | 27.41                | 1000000  | 47.4                  | 12.27             | -36.65             | 50.43                          | 68.23                        | -17.8         |
| 39.5417E+09    | 27.21                | 1000000  | 47.44                 | 12.24             | -36.62             | 50.26                          | 68.23                        | -17.97        |
| 39.5769E+09    | 27.29                | 1000000  | 47.48                 | 12.2              | -36.59             | 50.38                          | 68.23                        | -17.85        |
| 39.6474E+09    | 27.65                | 1000000  | 47.55                 | 12                | -36.5              | 50.69                          | 68.23                        | -17.54        |
| 39.6827E+09    | 27.33                | 1000000  | 47.59                 | 11.86             | -36.45             | 50.32                          | 68.23                        | -17.91        |
| 39.7179E+09    | 27.55                | 1000000  | 47.62                 | 11.79             | -36.39             | 50.57                          | 68.23                        | -17.66        |
| 39.7532E+09    | 27.67                | 1000000  | 47.66                 | 11.8              | -36.32             | 50.81                          | 68.23                        | -17.42        |
| 39.7885E+09    | 27.6                 | 1000000  | 47.71                 | 11.8              | -36.25             | 50.86                          | 68.23                        | -17.37        |
| 39.8237E+09    | 27.53                | 1000000  | 47.76                 | 11.86             | -36.17             | 50.98                          | 68.23                        | -17.25        |
| 39.859E+09     | 27.39                | 1000000  | 47.81                 | 11.95             | -36.08             | 51.07                          | 68.23                        | -17.16        |
| 39.8942E+09    | 27.46                | 1000000  | 47.86                 | 12.05             | -35.98             | 51.38                          | 68.23                        | -16.85        |
| 39.9295E+09    | 27.48                | 1000000  | 47.91                 | 12                | -35.9              | 51.49                          | 68.23                        | -16.74        |
| 39.9647E+09    | 27.58                | 1000000  | 47.96                 | 11.93             | -35.82             | 51.65                          | 68.23                        | -16.58        |
| 40.0E+09       | 27.39                | 1000000  | 48.01                 | 11.86             | -35.74             | 51.52                          | 68.23                        | -16.71        |

\*denotes average detection was used. Otherwise, peak detection was used.

**Table 36. Worst Case Cabinet Radiation (802.1a, UNII-2A, Horizontal Polarity)**

| Frequency (Hz) | Meter Reading (dBuV) | RBW (Hz) | Antenna Factor (dBuV) | Cable Factor (dB) | Preamp Factor (dB) | Corrected Measurement (dBuV/m) | Limit 1, FCC 15.407 (dBuV/m) | Margin 1 (dB) |
|----------------|----------------------|----------|-----------------------|-------------------|--------------------|--------------------------------|------------------------------|---------------|
| 30.0E+06       | 34.85                | 100000   | 22.3                  | 1.16              | -25.16             | 33.15                          | 68.23                        | -35.08        |
| 120.1603E+06   | 37.7                 | 100000   | 15.92                 | 2.31              | -25.14             | 30.79                          | 68.23                        | -37.44        |
| 235.1923E+06   | 33.46                | 100000   | 15.62                 | 3.29              | -25.16             | 27.21                          | 68.23                        | -41.02        |
| 675.1122E+06   | 27.15                | 100000   | 23.1                  | 5.63              | -25.3              | 30.57                          | 68.23                        | -37.66        |
| 2.7163E+09     | 65.85                | 1000000  | 32.25                 | 3.69              | -38.82             | 62.97                          | 68.23                        | -5.26         |
| 2.7436E+09     | 66.47                | 1000000  | 32.21                 | 3.74              | -38.92             | 63.51                          | 68.23                        | -4.72         |
| 2.7981E+09     | 50.66                | 1000000  | 32.05                 | 3.85              | -39.11             | 47.44                          | 68.23                        | -20.79        |
| 5.2772E+09     | 54.68                | 1000000  | 34.14                 | 5.91              | -43.75             | 50.99                          | 68.23                        | -17.24        |
| 16.3381E+09    | 47.93                | 1000000  | 40.48                 | 11.66             | -52.51             | 47.57                          | 68.23                        | -20.66        |
| 16.3654E+09    | 47.48                | 1000000  | 40.52                 | 11.69             | -52.54             | 47.15                          | 68.23                        | -21.08        |
| 16.3926E+09    | 47.32                | 1000000  | 40.55                 | 11.71             | -52.57             | 47.01                          | 68.23                        | -21.22        |
| 16.4199E+09    | 47.01                | 1000000  | 40.6                  | 11.78             | -52.99             | 46.39                          | 68.23                        | -21.84        |
| 16.4471E+09    | 47.41                | 1000000  | 40.66                 | 11.85             | -53.55             | 46.37                          | 68.23                        | -21.86        |
| 16.6923E+09    | 47.33                | 1000000  | 41.14                 | 11.48             | -53.5              | 46.45                          | 68.23                        | -21.78        |
| 39.5064E+09    | 27.41                | 1000000  | 47.4                  | 12.27             | -36.65             | 50.43                          | 68.23                        | -17.8         |
| 39.5417E+09    | 27.21                | 1000000  | 47.44                 | 12.24             | -36.62             | 50.26                          | 68.23                        | -17.97        |
| 39.5769E+09    | 27.29                | 1000000  | 47.48                 | 12.2              | -36.59             | 50.38                          | 68.23                        | -17.85        |
| 39.6474E+09    | 27.65                | 1000000  | 47.55                 | 12                | -36.5              | 50.69                          | 68.23                        | -17.54        |
| 39.6827E+09    | 27.33                | 1000000  | 47.59                 | 11.86             | -36.45             | 50.32                          | 68.23                        | -17.91        |
| 39.7179E+09    | 27.55                | 1000000  | 47.62                 | 11.79             | -36.39             | 50.57                          | 68.23                        | -17.66        |
| 39.7532E+09    | 27.67                | 1000000  | 47.66                 | 11.8              | -36.32             | 50.81                          | 68.23                        | -17.42        |
| 39.7885E+09    | 27.6                 | 1000000  | 47.71                 | 11.8              | -36.25             | 50.86                          | 68.23                        | -17.37        |
| 39.8237E+09    | 27.53                | 1000000  | 47.76                 | 11.86             | -36.17             | 50.98                          | 68.23                        | -17.25        |
| 39.859E+09     | 27.39                | 1000000  | 47.81                 | 11.95             | -36.08             | 51.07                          | 68.23                        | -17.16        |
| 39.8942E+09    | 27.46                | 1000000  | 47.86                 | 12.05             | -35.98             | 51.38                          | 68.23                        | -16.85        |
| 39.9295E+09    | 27.48                | 1000000  | 47.91                 | 12                | -35.9              | 51.49                          | 68.23                        | -16.74        |
| 39.9647E+09    | 27.58                | 1000000  | 47.96                 | 11.93             | -35.82             | 51.65                          | 68.23                        | -16.58        |
| 40.0E+09       | 27.39                | 1000000  | 48.01                 | 11.86             | -35.74             | 51.52                          | 68.23                        | -16.71        |

\*denotes average detection was used. Otherwise, peak detection was used.

**Table 37. Worst Case Cabinet Radiation (802.1a, UNII-2A, Vertical Polarity)**

| Frequency (Hz) | Meter Reading (dBUV) | RBW (Hz) | Antenna Factor (dBUV) | Cable Factor (dB) | Preamp Factor (dB) | Corrected Measurement (dBUV/m) | Limit 1, FCC 15.407 (dBUV/m) | Margin 1 (dB) |
|----------------|----------------------|----------|-----------------------|-------------------|--------------------|--------------------------------|------------------------------|---------------|
| 30.0E+06       | 33.69                | 100000   | 22.8                  | 1.16              | -25.16             | 32.49                          | 68.23                        | -35.74        |
| 399.9679E+06   | 28.91                | 100000   | 19.9                  | 4.3               | -25.25             | 27.86                          | 68.23                        | -40.37        |
| 449.7115E+06   | 29.11                | 100000   | 20.8                  | 4.66              | -25.08             | 29.49                          | 68.23                        | -38.74        |
| 2.7163E+09     | 62.61                | 1000000  | 32.28                 | 3.69              | -38.82             | 59.76                          | 68.23                        | -8.47         |
| 2.7436E+09     | 63.68                | 1000000  | 32.22                 | 3.74              | -38.92             | 60.73                          | 68.23                        | -7.5          |
| 2.7981E+09     | 48.91                | 1000000  | 32.07                 | 3.85              | -39.11             | 45.71                          | 68.23                        | -22.52        |
| 5.5769E+09     | 50.9                 | 1000000  | 34.4                  | 5.93              | -44.33             | 46.91                          | 68.23                        | -21.32        |
| 5.6042E+09     | 53.95                | 1000000  | 34.44                 | 5.9               | -44.29             | 50                             | 68.23                        | -18.23        |
| 16.3381E+09    | 48.16                | 1000000  | 40.5                  | 11.66             | -52.51             | 47.82                          | 68.23                        | -20.41        |
| 16.3654E+09    | 47.83                | 1000000  | 40.53                 | 11.69             | -52.54             | 47.51                          | 68.23                        | -20.72        |
| 16.3926E+09    | 47.58                | 1000000  | 40.57                 | 11.71             | -52.57             | 47.29                          | 68.23                        | -20.94        |
| 16.4199E+09    | 47.49                | 1000000  | 40.61                 | 11.78             | -52.99             | 46.89                          | 68.23                        | -21.34        |
| 16.4471E+09    | 47.18                | 1000000  | 40.66                 | 11.85             | -53.55             | 46.14                          | 68.23                        | -22.09        |
| 16.6923E+09    | 46.42                | 1000000  | 41.18                 | 11.48             | -53.5              | 45.58                          | 68.23                        | -22.65        |
| 16.7196E+09    | 46.8                 | 1000000  | 41.23                 | 11.4              | -53.73             | 45.7                           | 68.23                        | -22.53        |
| 39.5064E+09    | 27.29                | 1000000  | 47.42                 | 12.27             | -36.65             | 50.33                          | 68.23                        | -17.9         |
| 39.6122E+09    | 27.14                | 1000000  | 47.54                 | 12.13             | -36.55             | 50.26                          | 68.23                        | -17.97        |
| 39.6827E+09    | 27.38                | 1000000  | 47.62                 | 11.86             | -36.45             | 50.41                          | 68.23                        | -17.82        |
| 39.7179E+09    | 27.38                | 1000000  | 47.66                 | 11.79             | -36.39             | 50.44                          | 68.23                        | -17.79        |
| 39.7532E+09    | 27.63                | 1000000  | 47.7                  | 11.8              | -36.32             | 50.81                          | 68.23                        | -17.42        |
| 39.7885E+09    | 27.42                | 1000000  | 47.75                 | 11.8              | -36.25             | 50.72                          | 68.23                        | -17.51        |
| 39.8237E+09    | 27.47                | 1000000  | 47.8                  | 11.86             | -36.17             | 50.96                          | 68.23                        | -17.27        |
| 39.859E+09     | 27.53                | 1000000  | 47.84                 | 11.95             | -36.08             | 51.25                          | 68.23                        | -16.98        |
| 39.8942E+09    | 27.33                | 1000000  | 47.89                 | 12.05             | -35.98             | 51.28                          | 68.23                        | -16.95        |
| 39.9295E+09    | 27.42                | 1000000  | 47.94                 | 12                | -35.9              | 51.46                          | 68.23                        | -16.77        |
| 39.9647E+09    | 27.42                | 1000000  | 47.99                 | 11.93             | -35.82             | 51.52                          | 68.23                        | -16.71        |
| 40.0E+09       | 27.4                 | 1000000  | 48.03                 | 11.86             | -35.74             | 51.55                          | 68.23                        | -16.68        |

\*denotes average detection was used. Otherwise, peak detection was used.

**Table 38. Worst Case Cabinet Radiation (802.1a, UNII-2C, Horizontal Polarity)**

| Frequency (Hz) | Meter Reading (dBuV) | RBW (Hz) | Antenna Factor (dBuV) | Cable Factor (dB) | Preamp Factor (dB) | Corrected Measurement (dBuV/m) | Limit 1, FCC 15.407 (dBuV/m) | Margin 1 (dB) |
|----------------|----------------------|----------|-----------------------|-------------------|--------------------|--------------------------------|------------------------------|---------------|
| 31.5545E+06    | 37.16                | 100000   | 21.37                 | 1.27              | -25.06             | 34.74                          | 68.23                        | -33.49        |
| 120.1603E+06   | 36.2                 | 100000   | 15.92                 | 2.31              | -25.14             | 29.29                          | 68.23                        | -38.94        |
| 238.3013E+06   | 32.91                | 100000   | 15.9                  | 3.3               | -25.24             | 26.88                          | 68.23                        | -41.35        |
| 300.4808E+06   | 30.87                | 100000   | 17.6                  | 3.69              | -25.37             | 26.79                          | 68.23                        | -41.44        |
| 2.7163E+09     | 70.04                | 1000000  | 32.25                 | 3.69              | -38.82             | 67.16                          | 68.23                        | -1.07         |
| 2.7436E+09     | 69.48                | 1000000  | 32.21                 | 3.74              | -38.92             | 66.52                          | 68.23                        | -1.71         |
| 2.7981E+09     | 49.97                | 1000000  | 32.05                 | 3.85              | -39.11             | 46.76                          | 68.23                        | -21.47        |
| 2.8253E+09     | 49.5                 | 1000000  | 32                    | 3.87              | -39.3              | 46.07                          | 68.23                        | -22.16        |
| 5.5769E+09     | 51.08                | 1000000  | 34.4                  | 5.93              | -44.33             | 47.09                          | 68.23                        | -21.14        |
| 5.6042E+09     | 52.79                | 1000000  | 34.4                  | 5.9               | -44.29             | 48.8                           | 68.23                        | -19.43        |
| 15.0304E+09    | 45.65                | 1000000  | 39.27                 | 10.85             | -49.86             | 45.92                          | 68.23                        | -22.31        |
| 16.3381E+09    | 48.71                | 1000000  | 40.48                 | 11.66             | -52.51             | 48.35                          | 68.23                        | -19.88        |
| 16.3654E+09    | 48.52                | 1000000  | 40.52                 | 11.69             | -52.54             | 48.19                          | 68.23                        | -20.04        |
| 16.3926E+09    | 47.82                | 1000000  | 40.55                 | 11.71             | -52.57             | 47.51                          | 68.23                        | -20.72        |
| 16.4199E+09    | 47.37                | 1000000  | 40.6                  | 11.78             | -52.99             | 46.75                          | 68.23                        | -21.48        |
| 16.4471E+09    | 46.99                | 1000000  | 40.66                 | 11.85             | -53.55             | 45.96                          | 68.23                        | -22.27        |
| 39.5064E+09    | 27.32                | 1000000  | 47.4                  | 12.27             | -36.65             | 50.34                          | 68.23                        | -17.89        |
| 39.6122E+09    | 27.31                | 1000000  | 47.51                 | 12.13             | -36.55             | 50.4                           | 68.23                        | -17.83        |
| 39.6474E+09    | 27.2                 | 1000000  | 47.55                 | 12                | -36.5              | 50.24                          | 68.23                        | -17.99        |
| 39.6827E+09    | 27.27                | 1000000  | 47.59                 | 11.86             | -36.45             | 50.26                          | 68.23                        | -17.97        |
| 39.7179E+09    | 27.47                | 1000000  | 47.62                 | 11.79             | -36.39             | 50.49                          | 68.23                        | -17.74        |
| 39.7532E+09    | 27.54                | 1000000  | 47.66                 | 11.8              | -36.32             | 50.67                          | 68.23                        | -17.56        |
| 39.7885E+09    | 27.57                | 1000000  | 47.71                 | 11.8              | -36.25             | 50.82                          | 68.23                        | -17.41        |
| 39.8237E+09    | 27.61                | 1000000  | 47.76                 | 11.86             | -36.17             | 51.07                          | 68.23                        | -17.16        |
| 39.859E+09     | 27.63                | 1000000  | 47.81                 | 11.95             | -36.08             | 51.32                          | 68.23                        | -16.91        |
| 39.8942E+09    | 27.31                | 1000000  | 47.86                 | 12.05             | -35.98             | 51.23                          | 68.23                        | -17           |
| 39.9295E+09    | 27.46                | 1000000  | 47.91                 | 12                | -35.9              | 51.47                          | 68.23                        | -16.76        |
| 39.9647E+09    | 27.7                 | 1000000  | 47.96                 | 11.93             | -35.82             | 51.76                          | 68.23                        | -16.47        |
| 40.0E+09       | 27.49                | 1000000  | 48.01                 | 11.86             | -35.74             | 51.62                          | 68.23                        | -16.61        |

\*denotes average detection was used. Otherwise, peak detection was used.

**Table 39. Worst Case Cabinet Radiation (802.1a, UNII-2C, Vertical Polarity)**

| Frequency (Hz) | Meter Reading (dBuV) | RBW (Hz) | Antenna Factor (dBuV) | Cable Factor (dB) | Preamplifier Factor (dB) | Corrected Measurement (dBuV/m) | Limit 1, FCC 15.407 (dBuV/m) | Margin 1 (dB) |
|----------------|----------------------|----------|-----------------------|-------------------|--------------------------|--------------------------------|------------------------------|---------------|
| 31.5545E+06    | 34.12                | 100000   | 21.92                 | 1.27              | -25.06                   | 32.25                          | 68.23                        | -35.98        |
| 399.9679E+06   | 30.5                 | 100000   | 19.9                  | 4.3               | -25.25                   | 29.45                          | 68.23                        | -38.78        |
| 449.7115E+06   | 29.83                | 100000   | 20.8                  | 4.66              | -25.08                   | 30.22                          | 68.23                        | -38.01        |
| 2.7163E+09     | 60.31                | 1000000  | 32.28                 | 3.69              | -38.82                   | 57.46                          | 68.23                        | -10.77        |
| 2.7436E+09     | 61.34                | 1000000  | 32.22                 | 3.74              | -38.92                   | 58.38                          | 68.23                        | -9.85         |
| 5.7949E+09     | 50.9                 | 1000000  | 34.57                 | 5.97              | -45.45                   | 45.99                          | 68.23                        | -22.24        |
| 16.3381E+09    | 48.28                | 1000000  | 40.5                  | 11.66             | -52.51                   | 47.93                          | 68.23                        | -20.3         |
| 16.3654E+09    | 47.35                | 1000000  | 40.53                 | 11.69             | -52.54                   | 47.03                          | 68.23                        | -21.2         |
| 16.3926E+09    | 46.63                | 1000000  | 40.57                 | 11.71             | -52.57                   | 46.34                          | 68.23                        | -21.89        |
| 16.5288E+09    | 46.78                | 1000000  | 40.81                 | 11.87             | -54.33                   | 45.14                          | 68.23                        | -23.09        |
| 16.7196E+09    | 46.64                | 1000000  | 41.23                 | 11.4              | -53.73                   | 45.53                          | 68.23                        | -22.7         |
| 16.7468E+09    | 47.42                | 1000000  | 41.28                 | 11.29             | -54.06                   | 45.92                          | 68.23                        | -22.31        |
| 16.8013E+09    | 47.11                | 1000000  | 41.27                 | 11.09             | -54.7                    | 44.77                          | 68.23                        | -23.46        |
| 16.8285E+09    | 48.27                | 1000000  | 41.25                 | 11.16             | -54.57                   | 46.11                          | 68.23                        | -22.12        |
| 39.5769E+09    | 27.29                | 1000000  | 47.5                  | 12.2              | -36.59                   | 50.4                           | 68.23                        | -17.83        |
| 39.6122E+09    | 27.19                | 1000000  | 47.54                 | 12.13             | -36.55                   | 50.31                          | 68.23                        | -17.92        |
| 39.6827E+09    | 27.31                | 1000000  | 47.62                 | 11.86             | -36.45                   | 50.33                          | 68.23                        | -17.9         |
| 39.7179E+09    | 27.52                | 1000000  | 47.66                 | 11.79             | -36.39                   | 50.58                          | 68.23                        | -17.65        |
| 39.7532E+09    | 27.68                | 1000000  | 47.7                  | 11.8              | -36.32                   | 50.85                          | 68.23                        | -17.38        |
| 39.7885E+09    | 27.52                | 1000000  | 47.75                 | 11.8              | -36.25                   | 50.82                          | 68.23                        | -17.41        |
| 39.8237E+09    | 27.72                | 1000000  | 47.8                  | 11.86             | -36.17                   | 51.21                          | 68.23                        | -17.02        |
| 39.859E+09     | 27.44                | 1000000  | 47.84                 | 11.95             | -36.08                   | 51.16                          | 68.23                        | -17.07        |
| 39.8942E+09    | 27.62                | 1000000  | 47.89                 | 12.05             | -35.98                   | 51.57                          | 68.23                        | -16.66        |
| 39.9295E+09    | 27.32                | 1000000  | 47.94                 | 12                | -35.9                    | 51.36                          | 68.23                        | -16.87        |
| 39.9647E+09    | 27.49                | 1000000  | 47.99                 | 11.93             | -35.82                   | 51.58                          | 68.23                        | -16.65        |
| 40.0E+09       | 27.59                | 1000000  | 48.03                 | 11.86             | -35.74                   | 51.75                          | 68.23                        | -16.48        |

\*denotes average detection was used. Otherwise, peak detection was used.

**Table 40. Worst Case Cabinet Radiation (802.1a, UNII-3, Horizontal Polarity)**

| Frequency (Hz) | Meter Reading (dBuV) | RBW (Hz) | Antenna Factor (dBuV) | Cable Factor (dB) | Preamp Factor (dB) | Corrected Measurement (dBuV/m) | Limit 1, FCC 15.407 (dBuV/m) | Margin 1 (dB) |
|----------------|----------------------|----------|-----------------------|-------------------|--------------------|--------------------------------|------------------------------|---------------|
| 31.5545E+06    | 35.68                | 100000   | 21.37                 | 1.27              | -25.06             | 33.26                          | 68.23                        | -34.97        |
| 120.1603E+06   | 36.77                | 100000   | 15.92                 | 2.31              | -25.14             | 29.86                          | 68.23                        | -38.37        |
| 236.7468E+06   | 33.25                | 100000   | 15.77                 | 3.3               | -25.2              | 27.12                          | 68.23                        | -41.11        |
| 2.7163E+09     | 70.12                | 1000000  | 32.25                 | 3.69              | -38.82             | 67.24                          | 68.23                        | -0.99         |
| *2.7163E+09    | 44.4                 | 1000000  | 32.25                 | 3.69              | -38.82             | 42.24                          | 68.23                        | -25.99        |
| 2.7436E+09     | 64.18                | 1000000  | 32.21                 | 3.74              | -38.92             | 61.22                          | 68.23                        | -7.01         |
| 2.7708E+09     | 49.91                | 1000000  | 32.14                 | 3.79              | -39.01             | 46.82                          | 68.23                        | -21.41        |
| 2.7981E+09     | 53.57                | 1000000  | 32.05                 | 3.85              | -39.11             | 50.35                          | 68.23                        | -17.88        |
| 16.3381E+09    | 47.5                 | 1000000  | 40.48                 | 11.66             | -52.51             | 47.14                          | 68.23                        | -21.09        |
| 16.3654E+09    | 47.92                | 1000000  | 40.52                 | 11.69             | -52.54             | 47.59                          | 68.23                        | -20.64        |
| 16.3926E+09    | 47.29                | 1000000  | 40.55                 | 11.71             | -52.57             | 46.98                          | 68.23                        | -21.25        |
| 16.4199E+09    | 45.54                | 1000000  | 40.6                  | 11.78             | -52.99             | 44.93                          | 68.23                        | -23.3         |
| 16.7196E+09    | 46.72                | 1000000  | 41.18                 | 11.4              | -53.73             | 45.57                          | 68.23                        | -22.66        |
| 16.8013E+09    | 47.95                | 1000000  | 41.25                 | 11.09             | -54.7              | 45.59                          | 68.23                        | -22.64        |
| 16.8285E+09    | 47.39                | 1000000  | 41.24                 | 11.16             | -54.57             | 45.22                          | 68.23                        | -23.01        |
| 18.0E+09       | 44.42                | 1000000  | 40.54                 | 12.03             | -52.2              | 44.79                          | 68.23                        | -23.44        |
| 39.5769E+09    | 27.19                | 1000000  | 47.48                 | 12.2              | -36.59             | 50.27                          | 68.23                        | -17.96        |
| 39.6827E+09    | 27.3                 | 1000000  | 47.59                 | 11.86             | -36.45             | 50.29                          | 68.23                        | -17.94        |
| 39.7179E+09    | 27.52                | 1000000  | 47.62                 | 11.79             | -36.39             | 50.54                          | 68.23                        | -17.69        |
| 39.7532E+09    | 27.47                | 1000000  | 47.66                 | 11.8              | -36.32             | 50.6                           | 68.23                        | -17.63        |
| 39.7885E+09    | 27.53                | 1000000  | 47.71                 | 11.8              | -36.25             | 50.78                          | 68.23                        | -17.45        |
| 39.8237E+09    | 27.53                | 1000000  | 47.76                 | 11.86             | -36.17             | 50.98                          | 68.23                        | -17.25        |
| 39.859E+09     | 27.52                | 1000000  | 47.81                 | 11.95             | -36.08             | 51.2                           | 68.23                        | -17.03        |
| 39.8942E+09    | 27.48                | 1000000  | 47.86                 | 12.05             | -35.98             | 51.4                           | 68.23                        | -16.83        |
| 39.9295E+09    | 27.32                | 1000000  | 47.91                 | 12                | -35.9              | 51.33                          | 68.23                        | -16.9         |
| 39.9647E+09    | 27.39                | 1000000  | 47.96                 | 11.93             | -35.82             | 51.46                          | 68.23                        | -16.77        |
| 40.0E+09       | 27.34                | 1000000  | 48.01                 | 11.86             | -35.74             | 51.47                          | 68.23                        | -16.76        |

\*denotes average detection was used. Otherwise, peak detection was used.

**Table 41. Worst Case Cabinet Radiation (802.1a, UNII-3, Vertical Polarity)**

**Electromagnetic Compatibility Criteria for Intentional Radiators****RSS-247 (6.2.3)      Transmissions in the 5600 – 5650MHz Band**

**Test Requirements:**      §6.2.3 Until further notice, devices subject to this section shall not be capable of transmitting in the band 5600-5650 MHz. This restriction is for the protection of Environment Canada's weather radars operating in this band.

**Test Results:**      It was verified that no transmission occurred in the 5600 – 5650MHz band by performing -27dB down band edge measurements. Antenna port conducted methodologies were used per ANSI C63.10 section 12.7.4.2. The measurements were performed on transmit chain 1 and 2 and the vertical scale of the analyzer was offset with the cable loss and the directional array gain for the two transmitting antennas. For the lower band edge measurements at 5600MHz, the classical band edge procedures were followed. For the upper band edge measurements the channel integration method was employed per ANSI C63.10 Section 12.7.4.4.3. These measurements were performed on transmit channels adjacent to the 5600 – 5650MHz band supported by devices that will be sold into the Canadian market.

**Test Results:**      The EUT as tested is compliant with the requirements of this section. According to HP, Inc. the P033 will have channels that reside in the 5600 – 5650MHz band disabled when sold into the Canadian market. Additionally, the band edge measurements confirm that the channels that are adjacent to this band do not have any transmissions above -27dBm/MHz (EIRP) that extend into the band.

**Test Engineer(s):**      Bryan Taylor

**Test Date(s):**      1/11/2023 – 1/12/2023

| TX Port | TX Mode      | Channel | Band Edge Frequency (GHz) | Peak Amplitude (dBm/MHz) | Limit (dBm/MHz) | Peak Margin (dB) | TX Antenna *Gain (dBi) |
|---------|--------------|---------|---------------------------|--------------------------|-----------------|------------------|------------------------|
| 1       | 802.11a      | 116     | 5.6                       | -34.12                   | -27             | 7.12             | 6.64                   |
| 2       | 802.11a      | 116     | 5.6                       | -29.92                   | -27             | 2.92             | 6.64                   |
| 1       | 802.11a      | 132     | 5.65                      | -27.17                   | -27             | 0.17             | 6.64                   |
| 2       | 802.11a      | 132     | 5.65                      | -27.56                   | -27             | 0.56             | 6.64                   |
| 1       | 802.11n      | 116     | 5.6                       | -35.36                   | -27             | 8.36             | 6.64                   |
| 2       | 802.11n      | 116     | 5.6                       | -31.54                   | -27             | 4.54             | 6.64                   |
| 1       | 802.11n      | 132     | 5.65                      | -27.18                   | -27             | 0.18             | 6.64                   |
| 2       | 802.11n      | 132     | 5.65                      | -27.63                   | -27             | 0.63             | 6.64                   |
| 1       | 802.11n (40) | 110     | 5.6                       | -41.70                   | -27             | 14.7             | 6.64                   |
| 2       | 802.11n (40) | 110     | 5.6                       | -39.20                   | -27             | 12.2             | 6.64                   |
| 1       | 802.11n (40) | 1345    | 5.65                      | -27.62                   | -27             | 0.62             | 6.64                   |
| 2       | 802.11n (40) | 134     | 5.65                      | -27.20                   | -27             | 0.2              | 6.64                   |
| 1       | 802.11ac     | 106     | 5.6                       | -38.84                   | -27             | 11.84            | 6.64                   |
| 2       | 802.11ac     | 106     | 5.6                       | -35.19                   | -27             | 8.19             | 6.64                   |
| 1       | 802.11ac     | 138     | 5.65                      | -27.47                   | -27             | 0.47             | 6.64                   |
| 2       | 802.11ac     | 138     | 5.65                      | -27.38                   | -27             | 0.38             | 6.64                   |
| 1       | 802.11ax     | 106     | 5.6                       | -39.04                   | -27             | 12.04            | 6.64                   |
| 2       | 802.11ax     | 106     | 5.6                       | -35.44                   | -27             | 8.44             | 6.64                   |
| 1       | 802.11ax     | 138     | 5.65                      | -27.44                   | -27             | 0.44             | 6.64                   |
| 2       | 802.11ax     | 138     | 5.65                      | -27.48                   | -27             | 0.48             | 6.64                   |


\* The antenna gain used is the directional array gain which was calculated per KDB 662911 D01 Section F.2.a.(i) for correlated signals with equal antenna gains.

**Table 42. UNII-2C Worst Case Band Edge Emissions Adjacent to the 5600 – 5650MHz Band**


### Weather Radar Band Edge Plots



802.11a, Channel 116, TX Path 1

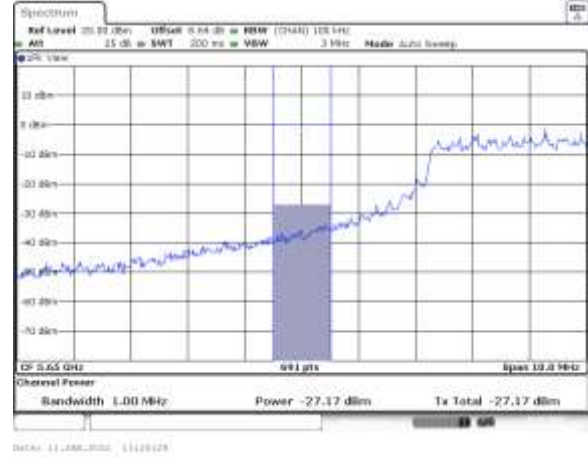

802.11a, Channel 132, TX Path 1

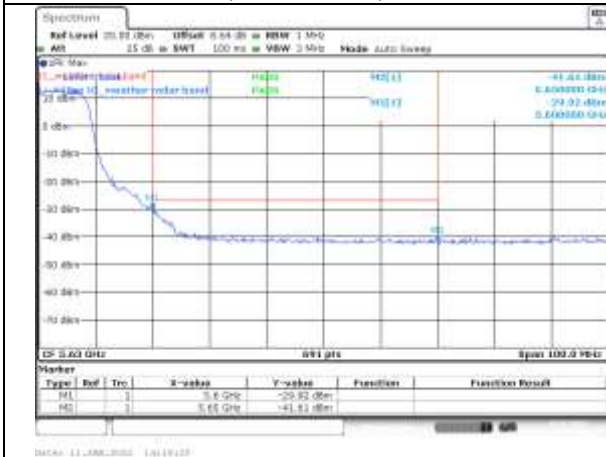


802.11a, Channel 116, TX Path 2




802.11a, Channel 132, TX Path 2


### Weather Radar Band Edge Plots

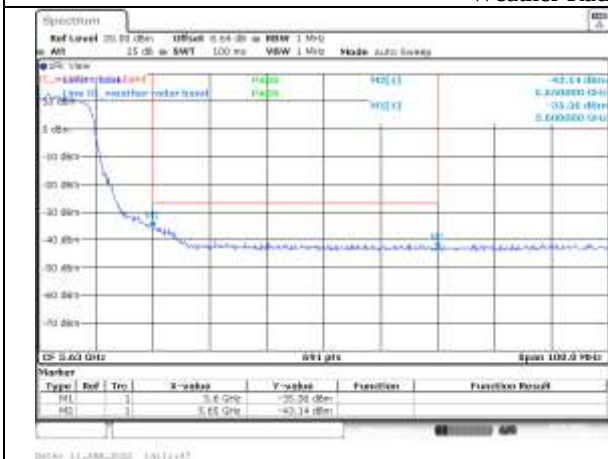


802.11n, Channel 116, TX Path 1

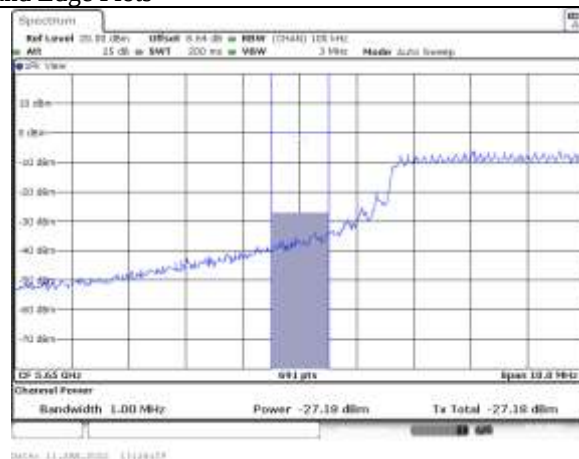

802.11n, Channel 132, TX Path 1

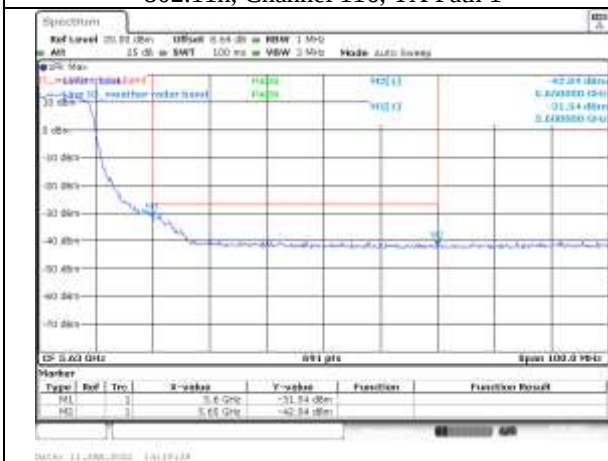


802.11n, Channel 116, TX Path 2

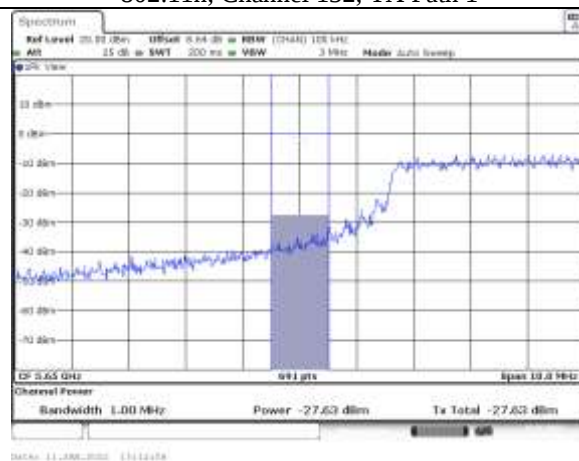

802.11n, Channel 132, TX Path 2

### Weather Radar Band Edge Plots

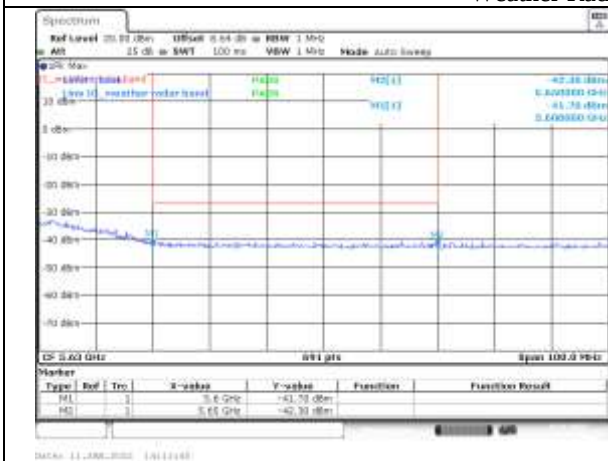

802.11n(40), Channel 110, TX Path 1



802.11n(40), Channel 134, TX Path 1




802.11n(40), Channel 110, TX Path 2



802.11n(40), Channel 134, TX Path 2


### Weather Radar Band Edge Plots

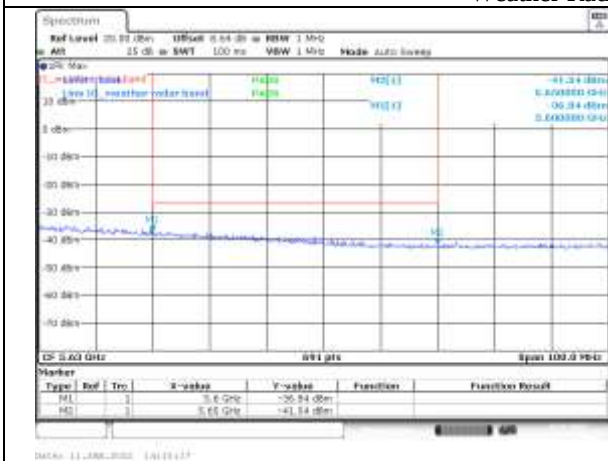


802.11ac, Channel 106, TX Path 1



802.11ac, Channel 138, TX Path 1

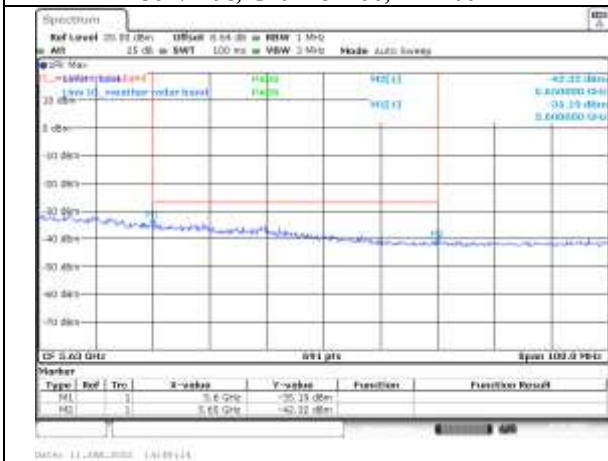


802.11ac, Channel 106, TX Path 2

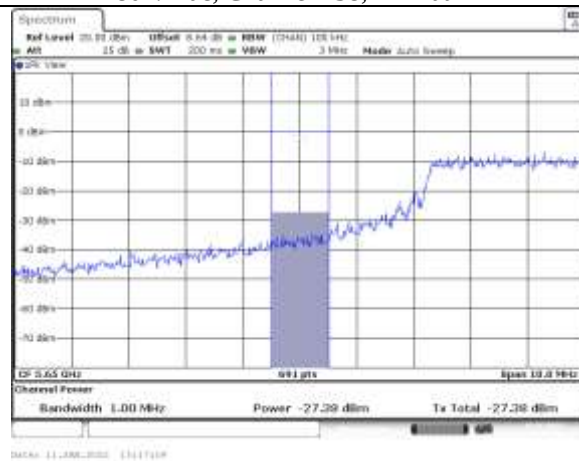


802.11ac, Channel 138, TX Path 2


### Weather Radar Band Edge Plots

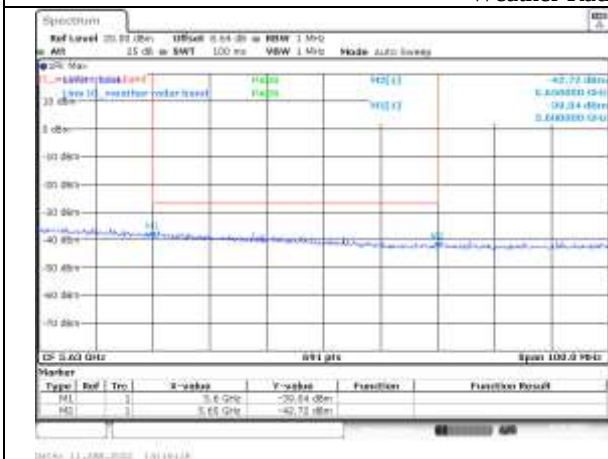


802.11ax, Channel 106, TX Path 1

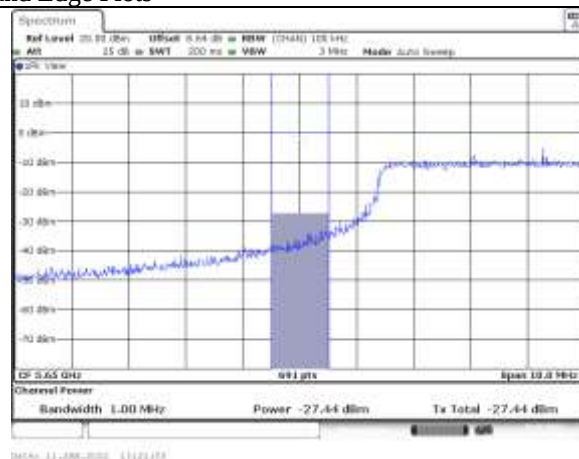

802.11ax, Channel 138, TX Path 1

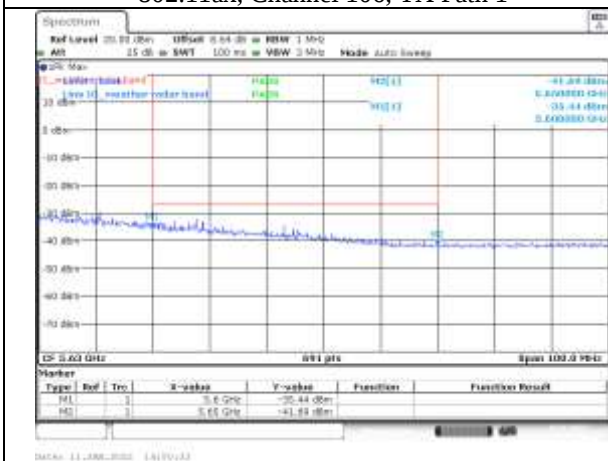

802.11ax, Channel 106, TX Path 2

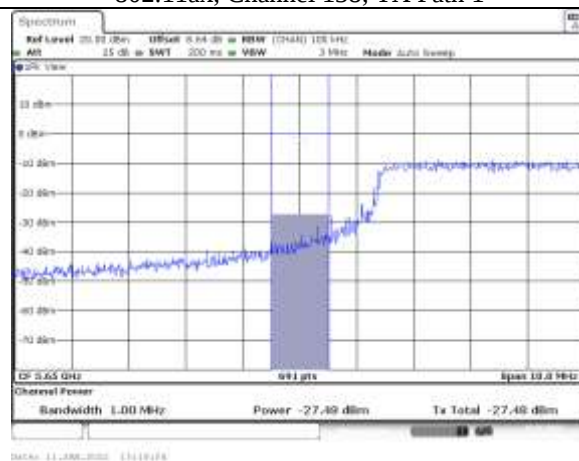

802.11ax, Channel 138, TX Path 2

## Electromagnetic Compatibility Criteria for Intentional Radiators

**§ 15.407(g)      Frequency Stability**

**Test Requirements:**      Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

**Test Results:**              The EUT was compliant with the requirements of this section. TX emission is maintained within the band of operation under all conditions of normal operation.

## IV. Test Equipment

## Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

| MET Asset # | Description                           | Manufacturer                       | Model                  | Last Cal Date | Cal Due Date |
|-------------|---------------------------------------|------------------------------------|------------------------|---------------|--------------|
| 1T4771      | Spectrum Analyzer                     | Keysight                           | E4446A                 | 4/25/2022     | 10/25/2023   |
| 1A1083      | Receiver                              | Rohde & Schwarz                    | ESU40                  | 7/1/2021      | 7/1/2022     |
| 1A1176      | Active Loop Antenna (9KHz-30MHz)      | ETS-Lindgren                       | 6502                   | 06/28/2021    | 06/28/2022   |
| 1A1050      | Bilog Antenna (30MHz – 1GHz)          | Schaffner                          | CBL 6112D              | 12/01/2020    | 12/01/2022   |
| 1A1183      | Horn Antenna (1GHz – 18GHz)           | ETS Lindgren                       | 3117                   | 06/01/2020    | 06/01/2022   |
| 1A1161      | Horn Antenna (18GHz – 40GHz)          | ETS Lindgren                       | 3116C                  | 06/03/2020    | 06/03/2022   |
| 1A1065      | EMI Receiver                          | Rohde & Schwarz                    | ESCI                   | 07/01/2021    | 07/01/2022   |
| 1A1087      | Pulse Limiter                         | Rohde & Schwarz                    | ESH3Z2                 | 06/30/2021    | 06/30/2022   |
| 1A1122      | LISN                                  | Teseq                              | NNB 51                 | 09/13/202     | 09/13/2022   |
| 1A1123      | LISN                                  | Teseq                              | NNB 51                 | 11/20/2021    | 11/20/2022   |
| 1A1197      | RF Current Probe                      | Fisher Custom Communications (FCC) | F-33-2                 | 09/13/2021    | 09/13/2022   |
| 1A1169      | Temp, Humidity, and Pressure Recorder | Omega                              | OM-CP-PRHTemp2000      | 03/02/2022    | 03/02/2023   |
| 1A1149      | DC Milliohm Meter                     | GW Instek                          | GOM-802                | 06/08/2021    | 06/08/2022   |
| 1A1119      | Conducted Emissions Test Area         | Custom Made                        | N/A                    | 06/08/2021    | 06/08/2022   |
| 1A1099      | Generator                             | Com-Power                          | CGO-51000              | See Note      |              |
| 1A1088      | Preamplifier                          | Rohde & Schwarz                    | TS-PR1                 | See Note      |              |
| 1A1044      | Generator                             | Com-Power                          | CG-520                 | See Note      |              |
| 1A1073      | Multi Device Controller               | ETS                                | 2090                   | See Note      |              |
| 1A1074      | System Controller                     | Panasonic                          | WV-CU101               | See Note      |              |
| 1A1080      | Multi-Device                          | ETS                                | 2090                   | See Note      |              |
| 1A1180      | Preamplifier                          | Miteq                              | AMF-7D-01001800-22-10P | See Note      |              |

**Table 43. Test Equipment List**

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.