

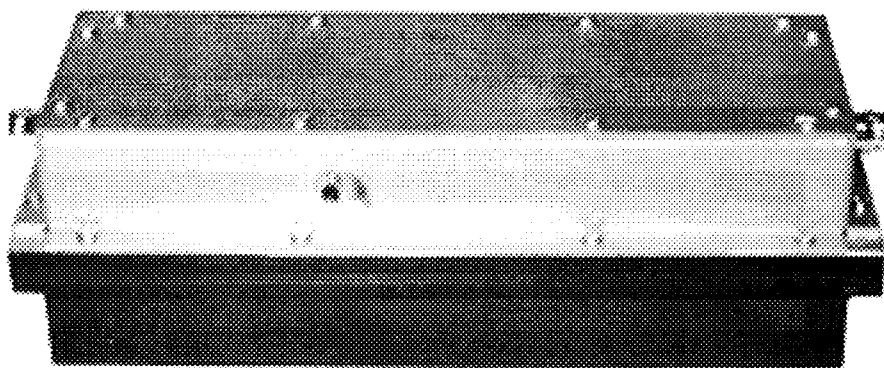
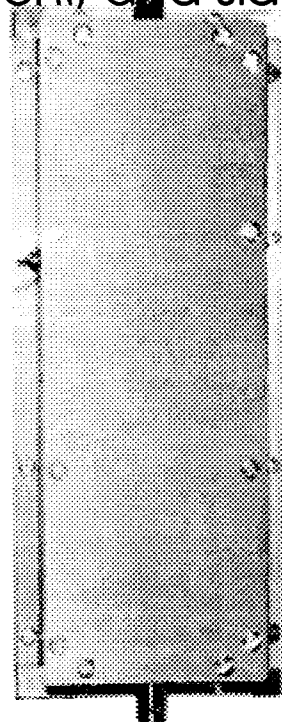


The 264524C Series of EMR amplifiers are intended for use in low power amplification and re-amplification systems. Applications include land mobile radio bi- and uni- directional signal booster systems. They will cover the frequency range extending from 440 MHz to 470 Mhz.

For operator convenience, views of the top, front, and side of the amplifier are presented here.

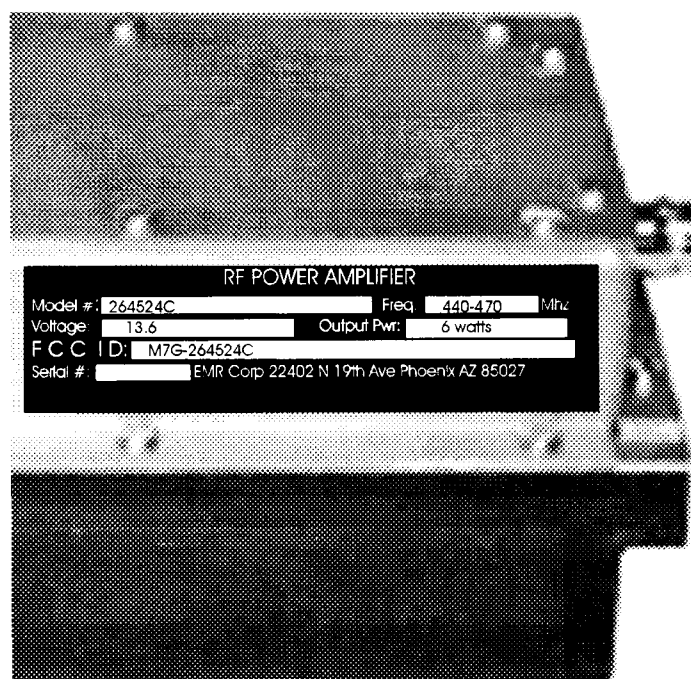

FCC Certification  
Label Placement

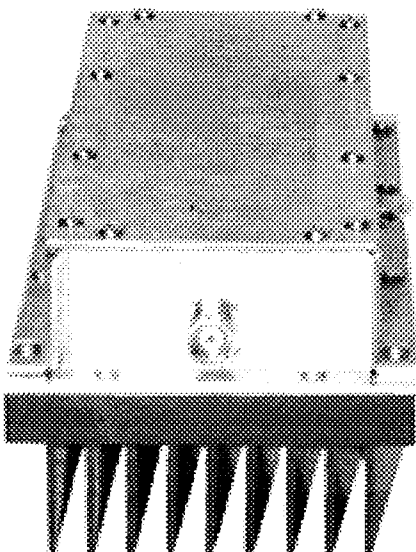

# PRODUCT DESCRIPTION