

ID Label/Location

Drawing of label
FCC ID: M7U-500V



FIRST ALERT®

MODEL SMC0500V

Single and/or Multiple Station Smoke Alarm & Carbon Monoxide Alarm
Powered with 2 AA Duracell MN1500 Batteries. Smoke Sensitivity: **120** %/ft. obs $\pm$ 25%

⚠ WARNING!

CARBON MONOXIDE CANNOT BE SEEN OR SMELLED BUT CAN KILL YOU.

IF ALARM SIGNAL SOUNDS:

1. OPERATE TEST / SILENCE BUTTON.
2. CALL YOUR EMERGENCY SERVICES (FIRE DEPARTMENT OR 911).
3. IMMEDIATELY MOVE TO FRESH AIR – OUTDOORS OR BY AN OPEN DOOR / WINDOW.

ALARM WILL NOT OPERATE IF BATTERIES ARE DEAD, DISCONNECTED OR IMPROPERLY INSTALLED. REFER TO USER'S MANUAL FOR COMPLETE BATTERY REPLACEMENT LIST, INSTALLATION, OPERATING AND SAFETY INFORMATION / INSTRUCTIONS. USE ONLY BATTERIES SPECIFIED. USE OF OTHER BATTERIES MAY HAVE A DETRIMENTAL EFFECT ON PRODUCT OPERATION. CONSTANT USE AT HIGH OR LOW TEMPERATURE OR HIGH HUMIDITY MAY REDUCE BATTERY LIFE.

IMPORTANT!

ALARM AUTOMATICALLY COMMUNICATES WITH COMPATIBLE WIRELESS INTERCONNECT ENABLED ALARMS. REFER TO USER'S MANUAL FOR MORE INFORMATION.

FCC ID: M7U-500V

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

CARBON MONOXIDE SENSITIVITY

CO LEVEL (PPM)	70	150	400
RESPONSE TIME (MIN)	60 - 240	10 - 50	4 - 15

Manufactured **PRODUCTION DATE FPO**

Installed On _____

Replace By _____

REPLACE ALARM 10 YEARS AFTER INSTALLATION

MAINTENANCE:

Gently vacuum or use clean compressed air to remove accumulated dust monthly. Never use water, cleaners or solvents, since they may damage the unit. Press the test button after installation, weekly and after cleaning to check all alarm functions.

ALARM GUIDE:

3 Beeps – Smoke Alarm

4 Beeps – CO Alarm

1 "Chirp" every 45 seconds – Replace Battery

3 "Chirps" every 45 seconds – Malfunction – Replace Alarm

5 "Chirps" every 45 seconds – End of Life – Replace Alarm

FOR "VOICE" INSTRUCTIONS – SEE MANUAL



Intertek

3055574

Conforms to UL STD 217
and UL STD 2034

Helps reduce cooking
nuisance alarms



PHOTOELECTRIC

WIRELESS
INTERCONNECT
ENABLED ALARM



Follow and retain user's manual

Customer Service Team: 1-800-323-9005

BRK Brands, Inc, 1301 Joe Battle


El Paso, TX 79936 USA

Made in Mexico

firstalert.com

N04-171588-171125


Details of Lable

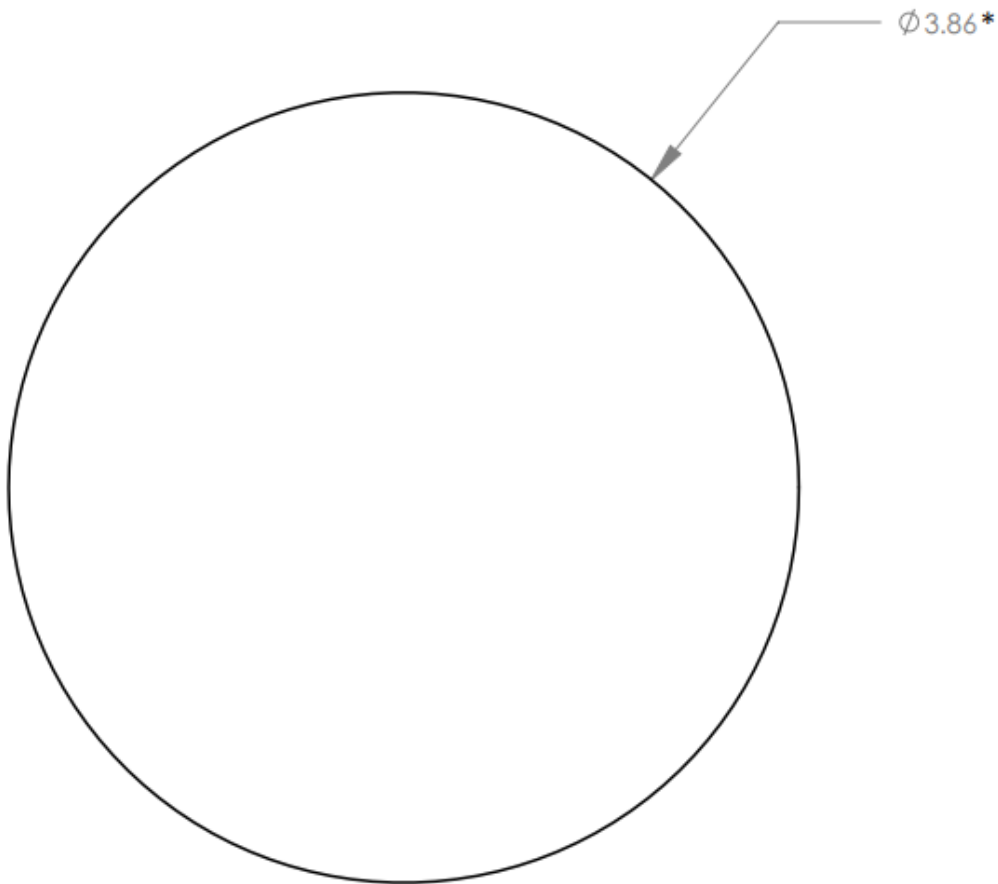

NOTES:

1. NAMEPLATE TO BE PRINTED IN PROCESS BLACK ON UL WHITE LITHO STOCK.
2. NAMEPLATE TO BE BACKED WITH PERMANENT PRESSURE SENSITIVE ADHESIVE-FASSON #S730 AND TO BE TAMPER PROOF.
3. PRINTER MUST BE APPROVED BY UL TO PRINT THIS NAMEPLATE.
ISSUE NO. TO BE SUPPLIED BY UL.
4. NAMEPLATE SHALL BE SUITABLY PACKED TO PREVENT DAMAGE IN SHIPPING AND HANDLING AND SHALL BE SUPPLIED IN CARTONS NOT WEIGHING MORE THAN 50 LBS.

Photograph showing placement of Label

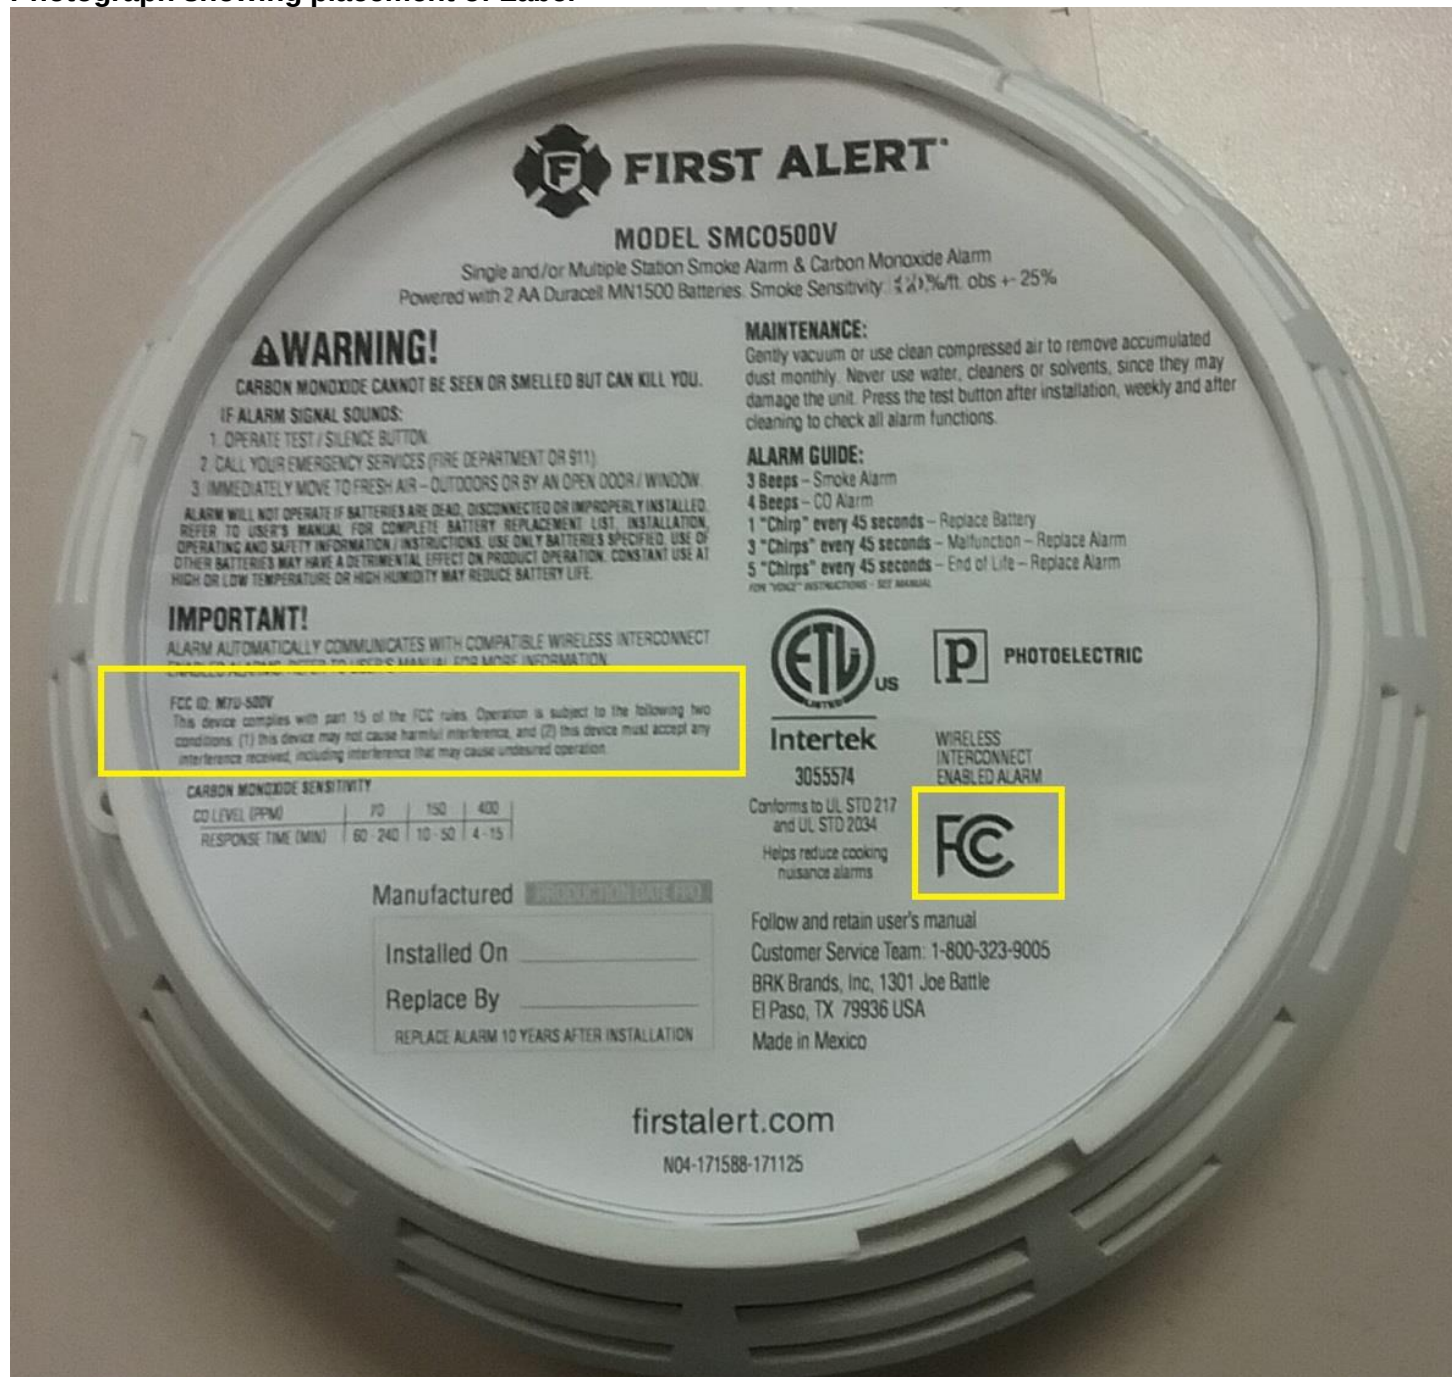

Rear of Product