

resideo

SMCO500V
Report #: RESI-28001
FCC ID: M7U-500V1

FCC 15.249:2024
Smoke/CO Alarm detector
Issue Date: 2026-02-20

Prepared by and for:
Resideo LLC.
2 Corporate Center Dr.
Suite 100 PO Box 9040
Melville, NY 11747

Testing
NVLAP Lab Code: 600110



Testing
NVLAP Lab Code: 600110

Test Report Revision History

Revision	Prepared By	Reviewed By	Revision Detail	Release Date
	Jose Badia	Christian Fouth	Original Release	2026-02-20

Contents

Test Report Revision History	2
Attestation of test results	4
Test result summary.....	5
Deviations from test standard.....	5
Accreditations and authorizations.....	6
Measurement uncertainty.....	6
Sample Calculation	6
Test Setup	7
Measurement Bandwidths	7
Antenna Port conducted measurements.....	7
Radiated Emission measurements	8
Equipment under test	9
Test Item Description	9
Test Sample Identification.....	9
Worse-Case Configuration & Mode.....	9
Power setting	9
Antenna description.....	9
Test & measurement equipment	10
Antenna Port measurements	12
20dB Bandwidth.....	12
99% Occupied Bandwidth.....	15
Radiated Emissions.....	18
Fundamental.....	18
Test Information.....	18
Test results	18
Spurious Radiated Emissions	19
Test Description	19
Test Information.....	20
Test results	21
Below 1GHz.....	21
1-10GHz.....	24
END OF REPORT.....	27

Attestation of test results

Company Name: Resideo LLC., 2 Corporate Center Dr., Melville, NY 11747, USA

EUT Description: Smoke and CO alarm detector

Model: SMCO500V

Serial Number: Non-Serialized units

Sample receipt date: 01/16/2026

Last Date of test: 02/19/2026

Standards

Specification	Method
FCC 15.249	ANSI C63.10: 2013 ANSI C63.10: 2020

Guidance

FCC KDB 558074 V05R02:2019

Resideo LLC. tested the above equipment in accordance with the requirements set forth in the listed standards. All indications of Pass/Fail in the report are opinions expressed by Resideo LLC. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

This document is a record of the FCC/ISED Test Report for Resideo LLC. products. It demonstrates the data required to be analyzed to certify a product according to the requirements of the FCC & ISED.

The results in the report reflect only the tested samples, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only.

This document may not be altered or revised in any way unless done so by Resideo LLC. and all revisions are duly noted in the revisions section. Any alterations of this document not carried out by Resideo LLC. will constitute fraud and shall nullify the document.

Report Prepared By:

Jose Badia

Name: Jose Badia

Title: Regulatory Certification Engineer

Resideo LLC.

Reviewed & Approved By:

Christian Fouth

Name: Christian Fouth

Title: Sr. Wireless Certification
Engineer

Resideo LLC.

Test result summary

Test Description	FCC Section (s)	Result	Comments
Radiated Emissions (Intentional)	15.249	Pass	
20 dB Bandwidth	15.249	Pass	
99% Occupied Bandwidth	15.249	NA	For reporting only

Deviations from test standard

None

Accreditations and authorizations

USA
FCC - test site and measurement facility used to collect data are located at 2 Corporate Center Dr., Melville, NY 11747, USA. Resideo LLC. is accredited by NVLAP, Laboratory Code 600110-0 . The full scope of accreditation can be viewed at the NVLAP website. Designation Number: US5344
Canada
ISED - test site and measurement facility used to collect data are located at 2 Corporate Center Dr., Melville, NY 11747, USA. Resideo LLC. is accredited by NVLAP, Laboratory Code 600110-0 . The full scope of accreditation can be viewed at the NVLAP website. CAB Identifier: US0242

Measurement uncertainty

The measuring equipment utilized to perform the tests documented in this report have been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards. Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Frequency Accuracy	+/- 0.0007%
Amplitude Accuracy (dB)	+/- 1.2 dB
Radiated Emissions	9 kHz – 30 MHz +/- 3.9 dB 30 MHz – 1GHz: +/- 4.4 dB 1 GHz – 10 GHz: +/- 4.3 dB
Conducted Power (dB)	+/- 1.2 dB
Temperature (°C)	+/- 0.7
Humidity (% RH)	+/- 2.5
DC Supply Voltages	+/- 0.7 %

Uncertainty figures are valid to a confidence level of 95% based on a coverage factor (k=2)

Sample Calculation

Where relevant, the following sample calculation is provided:

Radiated Emissions

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

Conducted Emissions:

Adjusted Level (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Transducer Factor (dB)

Radiated Power (EIRP) - Substitution Method:

Measured Power (dBm) = Measured Level into Substitution Antenna (dBm) + Substitution Antenna Factor (dBi)


Test Setup

Measurement Bandwidths

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 – 0.15	1.0	0.2	0.2
0.15 – 30.0	10.0	9.0	9.0
30.0 – 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0


Unless otherwise stated, measurements were made using the bandwidths and detectors specified. No video filter was used.

Antenna Port conducted measurements

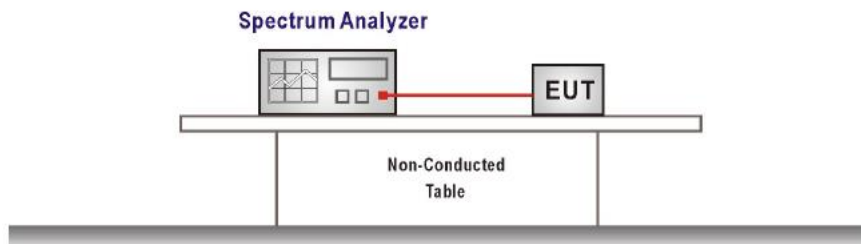


Radiated Emission measurements

30 MHz – 1000 MHz

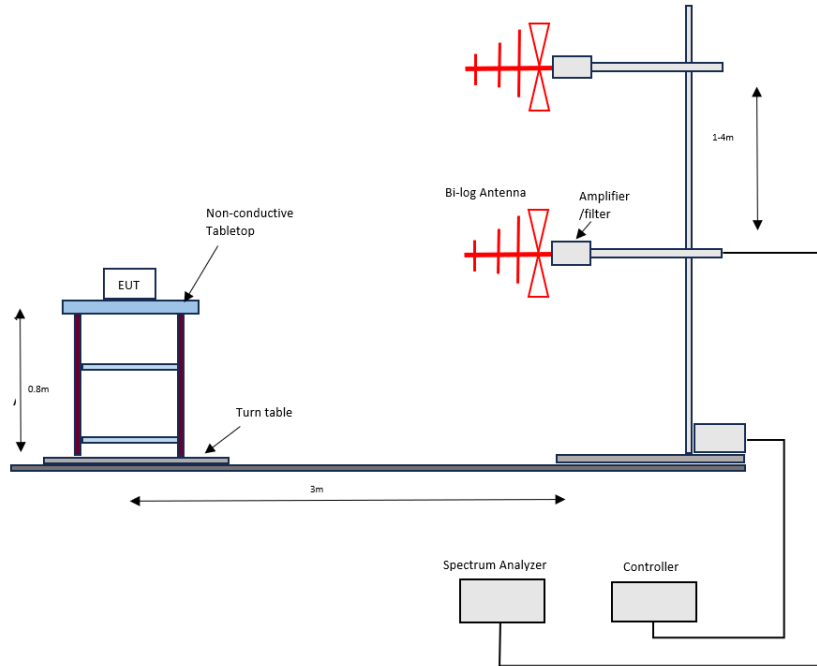

Above 1 GHz

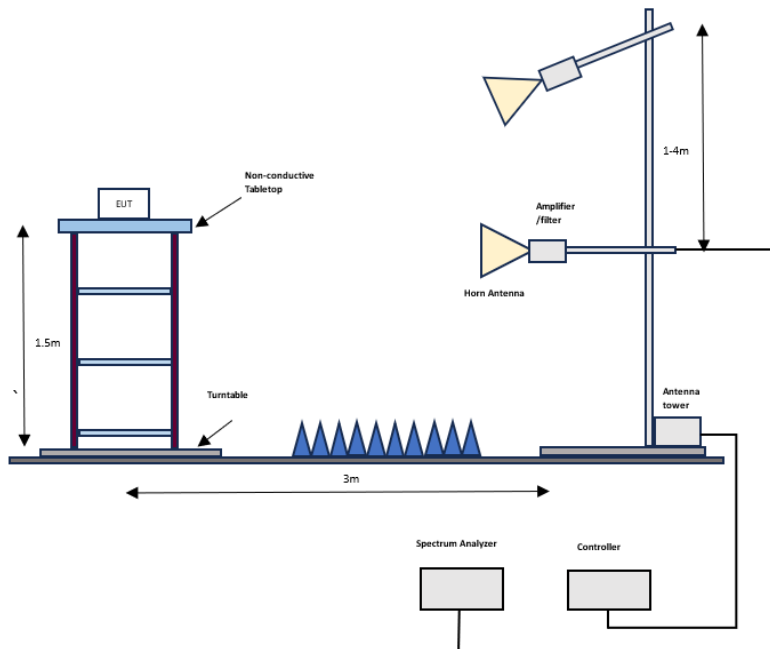

Equipment under test

Test Item Description

The EUT is a Smoke and CO alarm detector that provides comfort control for room environmental control of residential or commercial applications.

Test Sample Identification

Sample ID Number	Sample Serial Number	Date Received	Equipment Condition
MEL-1199	Non-serialized production unit	01/19/2026	No damage
MEL-1200	Non-serialized production unit	01/19/2026	No damage
MEL-1201	Non-serialized production unit	01/19/2026	No damage
MEL-1202	Non-serialized production unit	01/19/2026	No damage
MEL-1203	Non-serialized production unit	01/19/2026	No damage
MEL-1204	Non-serialized production unit	01/19/2026	No damage
MEL-1205	Non-serialized production unit	01/19/2026	No damage

Worse-Case Configuration & Mode

Radiated emissions was performed with the EUT set to transmit at L/M/H channels with the highest output power as worst-case scenario.

Power setting

Standard power settings were used during testing. This is the maximum power the EUT is allowed to transmit at during normal operation. The power levels cannot be changed by the end user.

Antenna description

Antenna	Type	Frequency Range (MHz)	Gain (dBi)
Antenna 1	PCB Antenna	909-923 MHz	-2.39

Test & measurement equipment

The following test and measurement equipment was utilized for the tests documented in this report:

Equipment List

Instrument Type	ID #	Serial #	Manufacturer	Model	Cal Date	Cal Due Date
RF Lab (Power & Antenna Port Measurements)						
Spectrum Analyzer	1149	MY46187211	Agilent	E4440A	3/5/2024	3/5/2026
Power Sensor	11568	105317	Rohde & Schwarz	NRP-Z81	01/21/2026	01/21/2028
Attenuator	-	1624	Pasternack	PE7087-6	04/04/2024	04/03/2026
RF Chamber						
Spectrum Analyzer	11545	103125	Rohde & Schwarz	FSW26	01/27/2026	01/27/2028
Loop Antenna (9kHz-30MHz)	11535	121080	Com-Power	AL-130R	3/4/2024	3/4/2026
Bilog Antenna (30MHz-5GHz)	11534	A012816	Sunol	JB6	3/4/2024	3/4/2026
Horn Antenna (1-18GHz)	2319	2317	EMCO	3115	01/21/2026	01/21/2028
Preamp (10-4200MHz)	11537	1603006	Mini Circuits	TVA-11-422	04/17/2025	04/16/2026
Preamp (500MHz-18GHz)	11557	18040034	Com-Power	PAM-118A	04/17/2025	04/16/2026
Band Reject Filter	11553	G041	Micro-tronics	BRM50702-01	04/04/2025	04/03/2026
RF Cable	-	-	Mini-Circuits	RDE#2	04/18/2025	04/17/2026
RF Cable	-	-	Insulated Wire	SMA#8	04/18/2025	04/17/2026
OATS						
Spectrum Analyzer	11545	103125	Rohde & Schwarz	FSW26	01/27/2026	01/27/2028
Bilog Antenna (30MHz-6GHz)	11534	A012816	Sunol	JB6	3/4/2024	3/4/2026
Horn Antenna (1-18GHz)	2973	3127	EMCO	RGA-60	01/21/2026	01/21/2028
Preamp (100kHz-1.3GHz)	11540	2443AUF555	HP	8447D	04/18/2025	04/17/2026
Preamp (1-18GHz)	11539	160362	Amplical	AMP1G18-35	04/17/2025	04/16/2026
High Pass Filter	11552	G018	Micro-tronics	HPM50111-01	03/28/2025	03/27/2026

RF Cable	-	-	Pasternack	RDE#1	04/17/2025	04/16/2026
RF Cable	-	-	MegaPhase	EMC2-S1S1-360	04/17/2025	04/16/2026
Misc.						
Measurement Software	11543	Version 9.5	UL	UL EMC	N/A	N/A
Environmental Meter	11533	A070144	Extech Instruments	SD700		

*-Passive devices & Preamps are characterized in-house, not calibrated.

Antenna Port measurements

20dB Bandwidth

Test Description

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

Test Criteria

Reference	Limit
CFR 47 Subpart C 15.249:2024	None, for reporting only

Test Information

Tester	Test Location	Date	Temperature (°C)	Humidity (%RH)	Pressure (mbar)	Results (P/F)
Jose Badia	Melville	01/20/2025	20.5	54	1012	Pass

Test Results

Channel	Frequency (MHz)	20db Bandwidth (kHz)
CH0	909.0	239.22
CH1	913.3	238.78
CH2	922.9	236.04

 Agilent

S

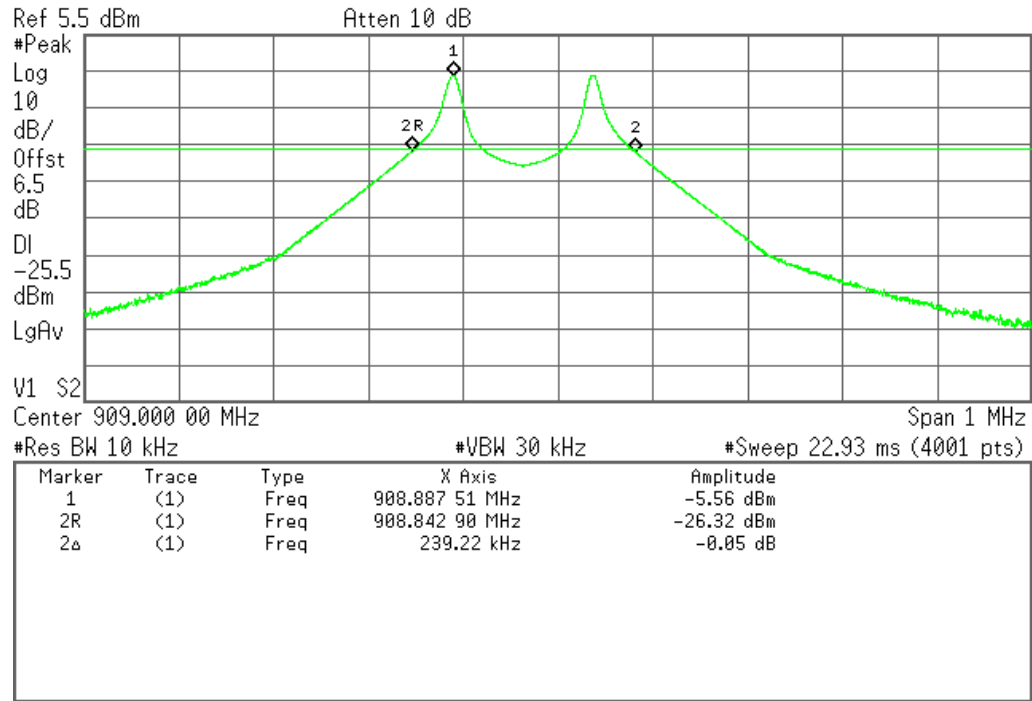


Figure 1 20 dB Bandwidth – Low channel

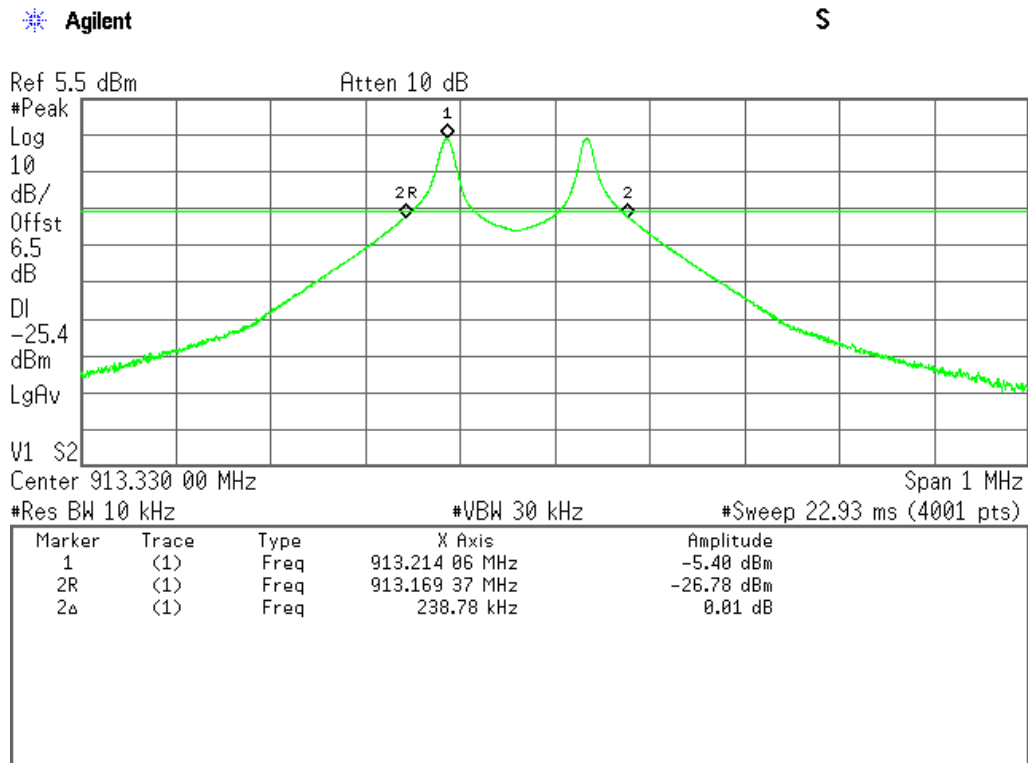


Figure 2 20 dB Bandwidth - Mid channel

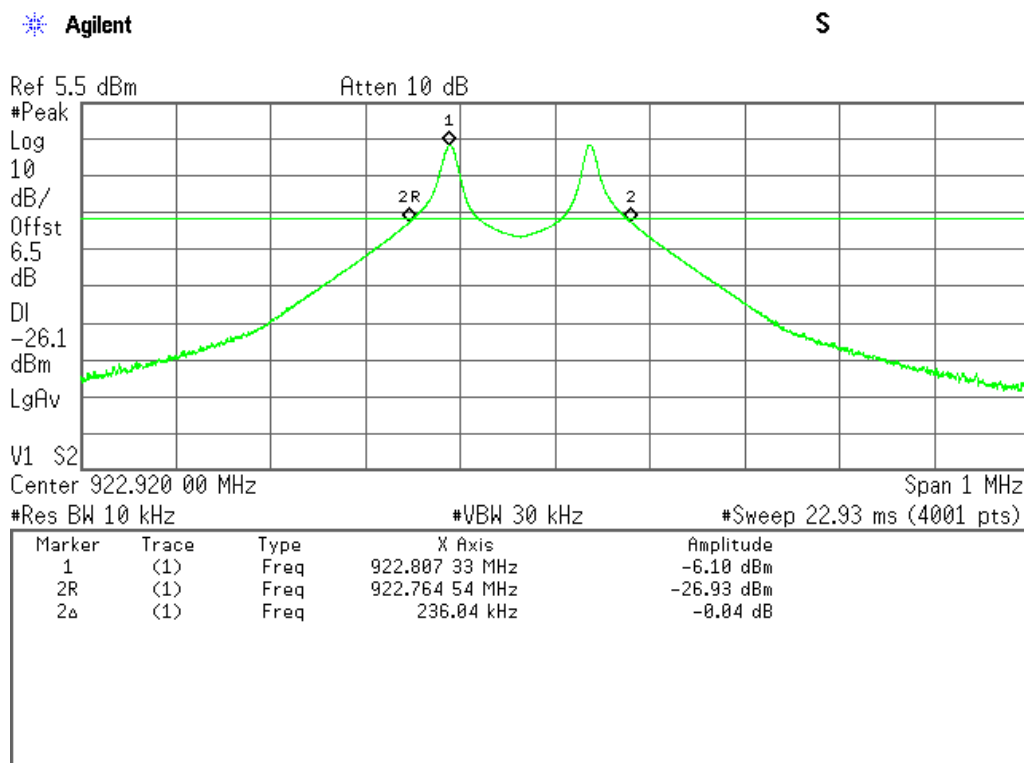


Figure 3 20 dB Bandwidth - High channel

99% Occupied Bandwidth

Test Description


The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth.


Test Information

Tester	Test Location	Date	Temperature (°C)	Humidity (%RH)	Pressure (mbar)	Results (P/F)
Jose Badia	RF Lab	01/20/2026	20.5	54	1012	P

Test Results


Channel	Frequency (MHz)	99% Bandwidth (kHz)
CH0	909.0	220.2
CH1	913.3	226.9
CH2	922.9	225.5

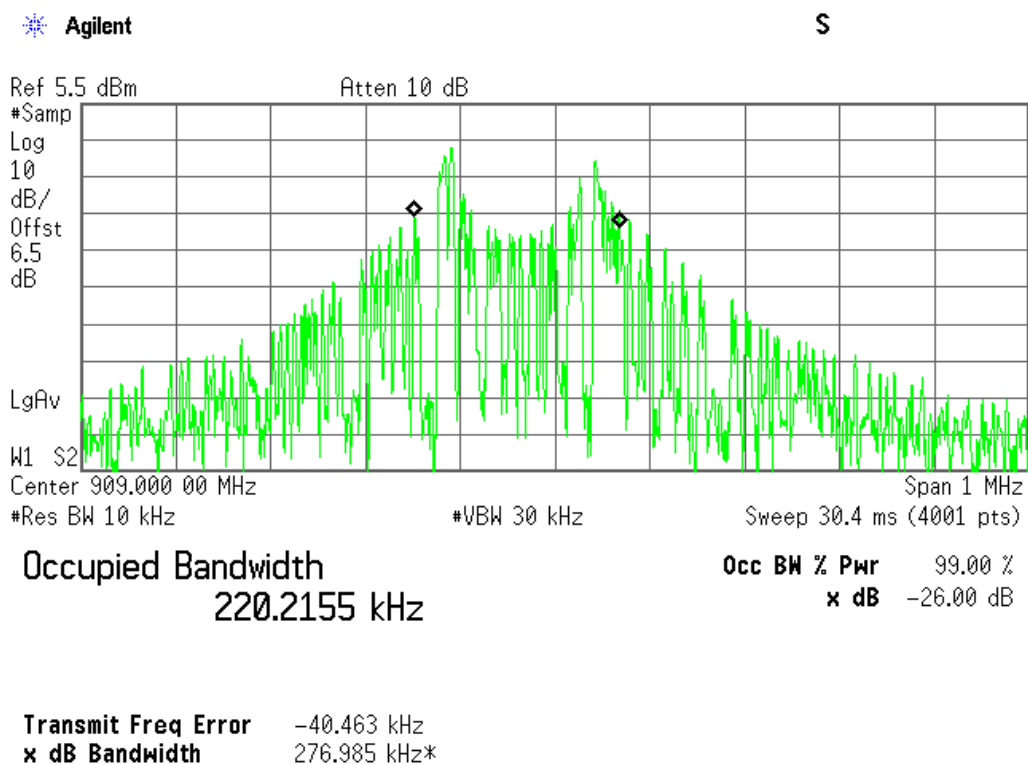*Figure 4 99% OBW– Low channel*

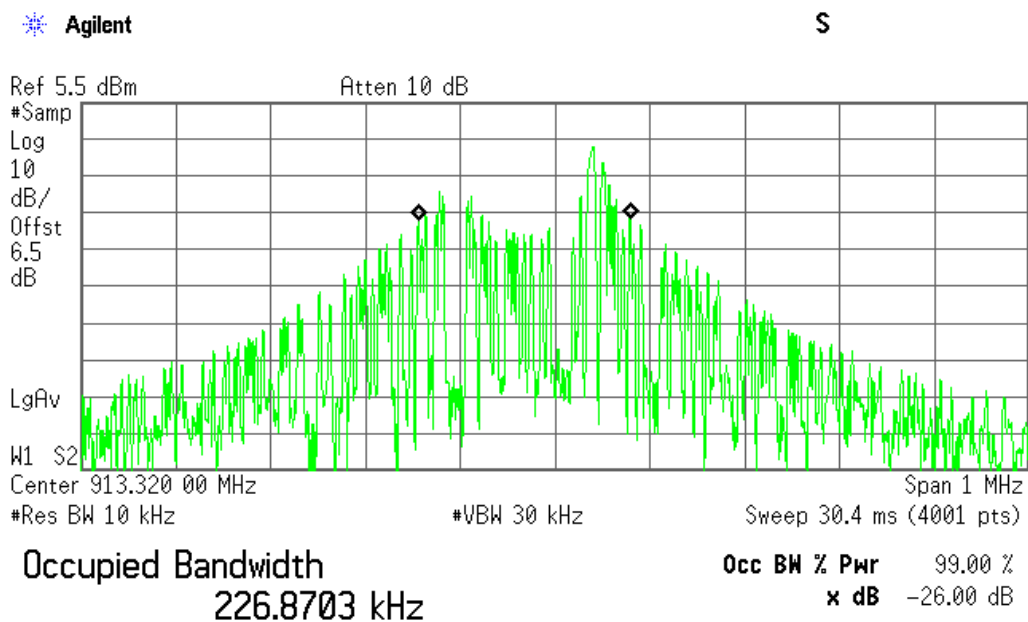

Transmit Freq Error -32.502 kHz
x dB Bandwidth 258.751 kHz*

Figure 5 99% OBW - Mid channel

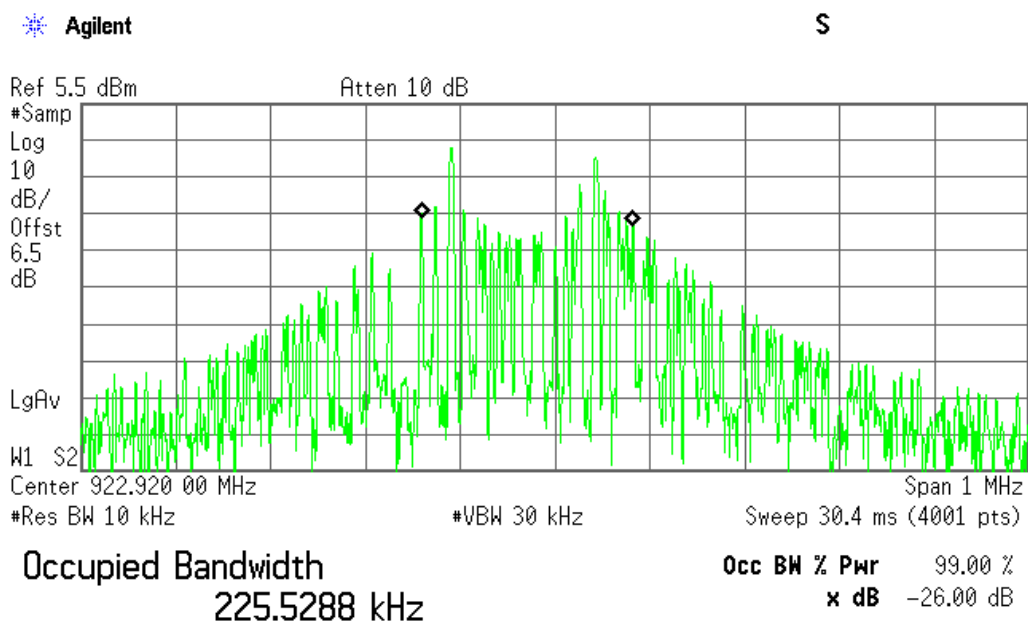

Transmit Freq Error -29.433 kHz
x dB Bandwidth 250.406 kHz*

Figure 6 99% OBW - High channel

Radiated Emissions

Test Criteria

Reference	Limit		
CFR 47 Subpart C, 15.205 CFR 47 Subpart C, 15.209	Frequency Range (MHz)	Field Strength Limit (uV/m)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100	3
	88-216	150	3
	216-960	200	3
	Above 960	500	3

¹Linear interpolation

Reference	Limit		
CFR 47 Subpart C, 15.249	Frequency Range (MHz)	Field Strength Limit of fundamental (mV/m) @ 3m	Field Strength Limit of Harmonics (uV/m) @ 3m
	909-924	50	500

Fundamental

Test Information

Tester	Test Location	Date	Temperature (°C)	Humidity (%RH)	Pressure (mbar)	Results (P/F)
Jose Badia	Melville, OATS	02/18/2026	4	85	1019	Pass

Test results

Low Channel

Frequency (MHz)	Meter Reading (dBuV)	Det	2024_10mh	RDE1_Cable	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
908.8925	61.67	Qp	27.1	4	92.77	94	-1.23	206	150	H
908.894	50.26	Qp	27.1	4	81.36	94	-12.64	125	121	V

Pk - Peak detector

FCC Pt 15 Subpart C 30-1000MHz.TST

Rev 9.5 01 Nov 2018

Mid Channel

Frequency (MHz)	Meter Reading (dBuV)	Det	2024_10mh	RDE1_Cable	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
913.3623	61.43	Qp	27	4	92.43	94	-1.57	203	148	H
913.2135	48.91	Qp	27	4	79.91	94	-14.9	315	212	V

Pk - Peak detector

FCC Pt 15 Subpart C 30-1000MHz.TST

Rev 9.5 01 Nov 2018

High Channel

Frequency (MHz)	Meter Reading (dBuV)	Det	2024_10mh	RDE1_Cable	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
922.8174	60.28	Qp	27.1	4	91.38	94	-2.62	195	149	H
922.9675	50.09	Qp	27.1	4	81.19	94	-12.81	315	142	V

Pk - Peak detector

Qp - Quasi-Peak detector

FCC Pt 15 Subpart C 30-1000MHz (2025).TST

Rev 9.5 01 Nov 2018

Spurious Radiated Emissions

Test Description

The EUT is positioned to get the maximum emissions after a series of prescan measurements. The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1 GHz measurements and 1.5 m above the ground plane for above 1 GHz measurements. The antenna to EUT distance is 3 meters.

For measurements below 1 GHz the resolution bandwidth is set to 120 kHz for peak detection measurements and/or 120 kHz for quasi-peak detection measurements in the 30-1000MHz range. Peak detection is used unless otherwise noted as quasi-peak.

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 30 MHz to 10 GHz is investigated with the transmitter set to the lowest, and highest channels in each applicable band.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

The EUT is set to transmit in a continuous mode.

Test Information

Tester	Test Location	Date	Temperature (°C)	Humidity (%RH)	Pressure (mbar)	Results (P/F)
Jose Badia	Melville, OATS	02/19/2026	4	85	119	Pass

NOTE: Below 30MHz, pretesting showed that no emissions as a product of the EUT were detected within 20dB of the regulatory limit. Prescans performed in an anechoic chamber, final measurements performed on an OATS.

Test results

Below 1GHz

Low Channel

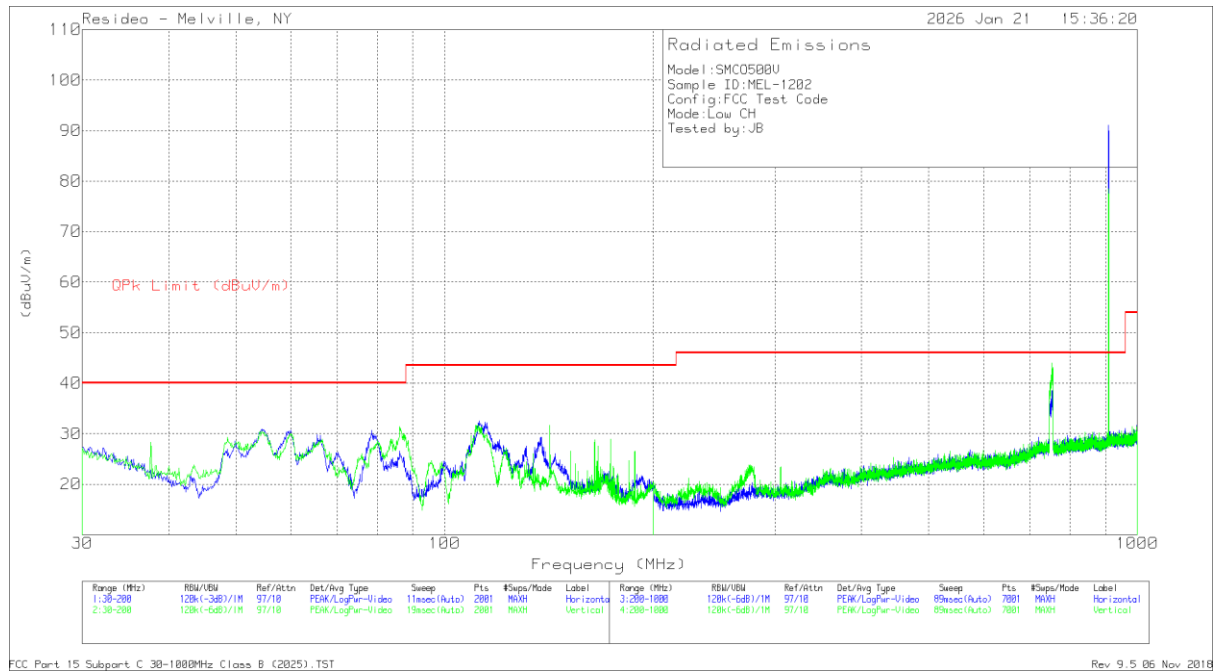


Figure 7 30 MHz - 1 GHz prescan - Low channel

Radiated Emissions

Frequency (MHz)	Meter Reading (dBuV)	Det	2024_10mh	RDE1_Cable	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
54.0259	15.74	Qp	11.7	.9	28.34	40	-11.66	131	360	H
* 112.1834	6.67	Qp	17.6	1.3	25.57	43.52	-17.95	244	122	H
85.9532	19.57	Qp	12	1.1	32.67	40	-7.33	290	153	V
141.0206	5.71	Qp	17.9	1.5	25.11	43.52	-18.41	132	221	V
754.9999	4.56	Qp	25.3	3.7	33.56	46.02	-12.46	189	131	H
752	5.7	Qp	25.3	3.7	34.7	46.02	-11.32	103	309	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Qp - Quasi-Peak detector

FCC Pt 15 Subpart C 30-1000MHz.TST

Rev 9.5 01 Nov 2018

Mid channel

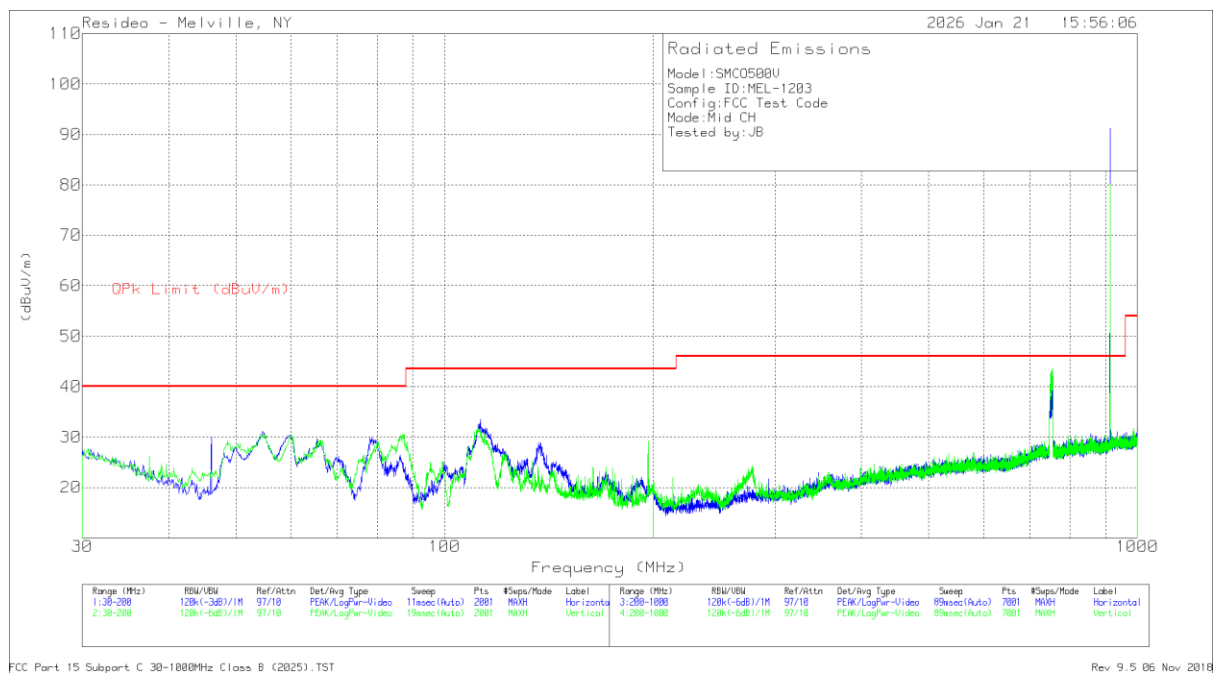


Figure 8 30 MHz - 1 GHz prescan - Mid Channel

Radiated Emissions

Frequency (MHz)	Meter Reading (dBuV)	Det	2024_10mh	RDE1_Cable	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
54.564	15.42	Qp	11.8	.9	28.12	40	-11.88	285	318	H
* 112.7	2.93	Qp	17.7	1.3	21.93	43.52	-21.59	191	161	H
89.9064	24.82	Qp	12.3	1.2	38.32	43.52	-5.2	292	232	V
196.6001	5.74	Qp	16.7	1.8	24.24	43.52	-19.28	319	179	V
753	1.5	Qp	25.3	3.7	30.5	46.02	-15.52	254	114	H
753.8999	5.88	Qp	25.3	3.7	34.88	46.02	-11.14	265	153	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Qp - Quasi-Peak detector

FCC Pt 15 Subpart C 30-1000MHz (2025).TST

Rev 9.5 01 Nov 2018

High Channel

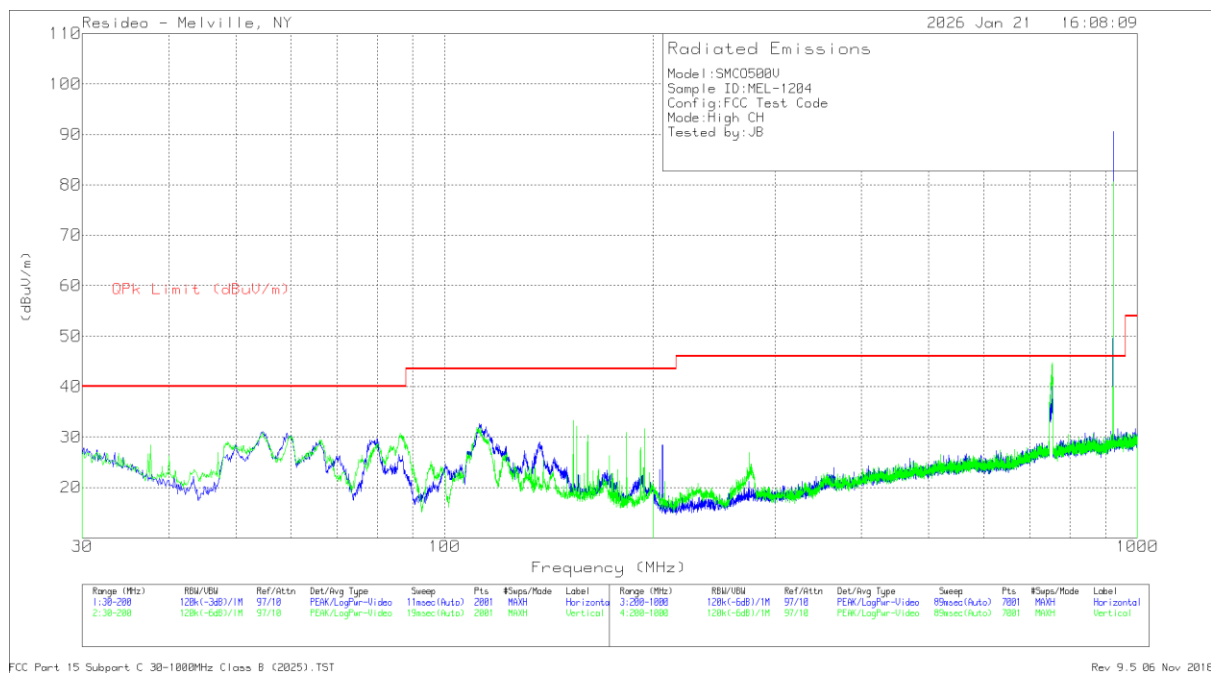


Figure 9 30 MHz-1GHz prescan - High channel

Radiated Emissions

Frequency (MHz)	Meter Reading (dBuV)	Det	2024_10mh	RDE1_Cable	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
54.599	13.94	Qp	11.8	.9	26.64	40	-13.36	334	151	H
* 112.0407	5.6	Qp	17.6	1.3	24.5	43.52	-19.02	279	182	H
86.2001	9	Pk	12	1.1	22.1	40	-17.9	342	277	V
153.5368	10.43	Qp	16.9	1.5	28.83	43.52	-14.69	301	178	V
751.9999	6.32	Qp	25.3	3.7	35.32	46.02	-10.7	198	139	H
751.9998	2.67	Qp	25.3	3.7	31.67	46.02	-14.35	98	209	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

Qp - Quasi-Peak detector

FCC Pt 15 Subpart C 30-1000MHz (2025).TST

Rev 9.5 01 Nov 2018

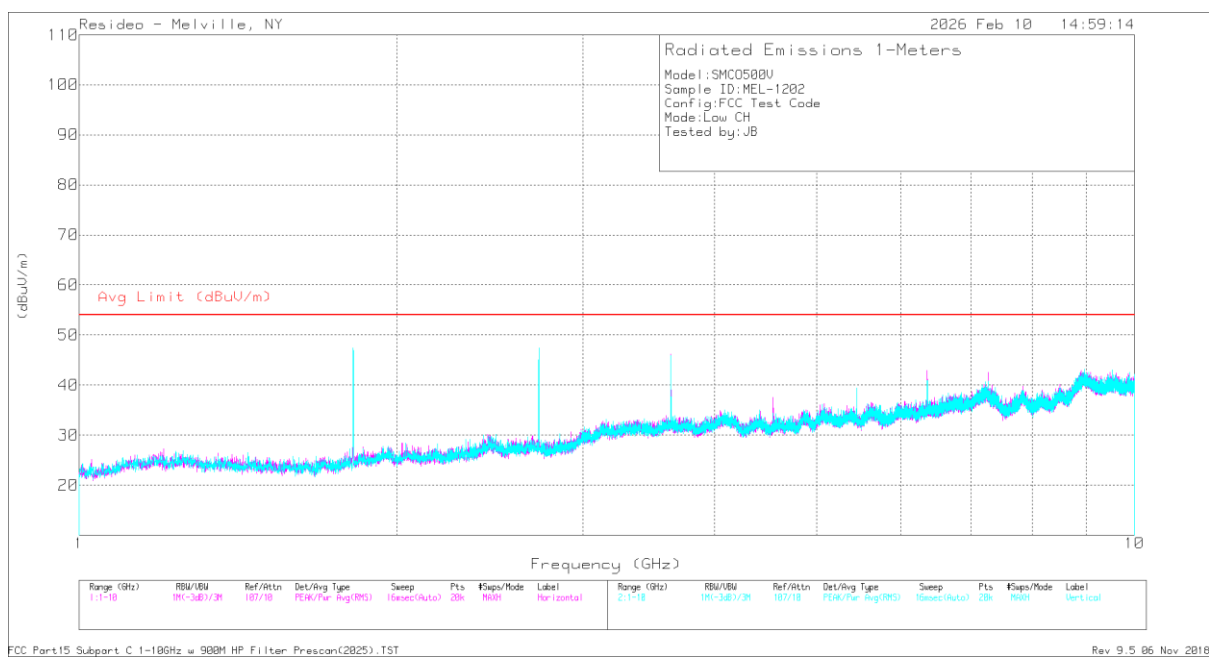1-10GHz**Low Channel****Figure 10 1 GHz-10 GHz prescan - Low channel****Radiated Emissions**

Frequency (GHz)	Meter Reading (dBuV)	Det	2023 - 3MH	Preamp No Filter_10-5-18	SMA Cables_2025	HP Filter3 900M_2025	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degrees)	Height (cm)	Polarity
1.818	50.75	PK2	26.7	-42	5.7	.9	42.05	-	-	74	-31.95	105	385	H
1.818	45.91	MAV1	26.7	-42	5.7	.9	37.21	54	-16.79	-	-	105	385	H
* 2.727	60.71	PK2	29.7	-43.4	6.9	.7	54.61	-	-	74	-19.39	138	379	H
* 2.727	58.58	MAV1	29.7	-43.4	6.9	.7	52.48	54	-1.52	-	-	138	379	H
* 3.636	56.15	PK2	31.6	-42	8	.8	54.55	-	-	74	-19.45	61	314	H
* 3.636	51.73	MAV1	31.6	-42	8	.8	50.13	54	-3.87	-	-	61	314	H
6.363	43.65	PK2	34.8	-40.8	10.5	.5	48.65	-	-	74	-25.35	158	381	H
6.362	33.84	MAV1	34.8	-40.8	10.5	.5	38.84	54	-15.16	-	-	158	381	H
1.818	53.87	PK2	26.7	-42	5.7	.9	45.17	-	-	74	-28.83	133	255	V
1.818	50.38	MAV1	26.7	-42	5.7	.9	41.68	54	-12.32	-	-	133	255	V
* 2.727	61.18	PK2	29.7	-43.4	6.9	.7	55.08	-	-	74	-18.92	33	355	V
* 2.727	59.28	MAV1	29.7	-43.4	6.9	.7	53.18	54	-.82	-	-	33	355	V
* 3.636	54.45	PK2	31.6	-42	8	.8	52.85	-	-	74	-21.15	99	308	V
* 3.636	49.46	MAV1	31.6	-42	8	.8	47.86	54	-6.14	-	-	99	308	V
6.363	43.04	PK2	34.8	-40.8	10.5	.5	48.04	-	-	74	-25.96	176	247	V
6.362	32.3	MAV1	34.8	-40.8	10.5	.5	37.3	54	-16.7	-	-	176	247	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAV1 - KDB558074 Option 1 Maximum RMS Average

FCC Pt15 Subpart C 1-18GHz - Preamp In Filter Out (HP Filter In) (2025).TST

Rev 9.5 01 Nov 2018

Mid Channel

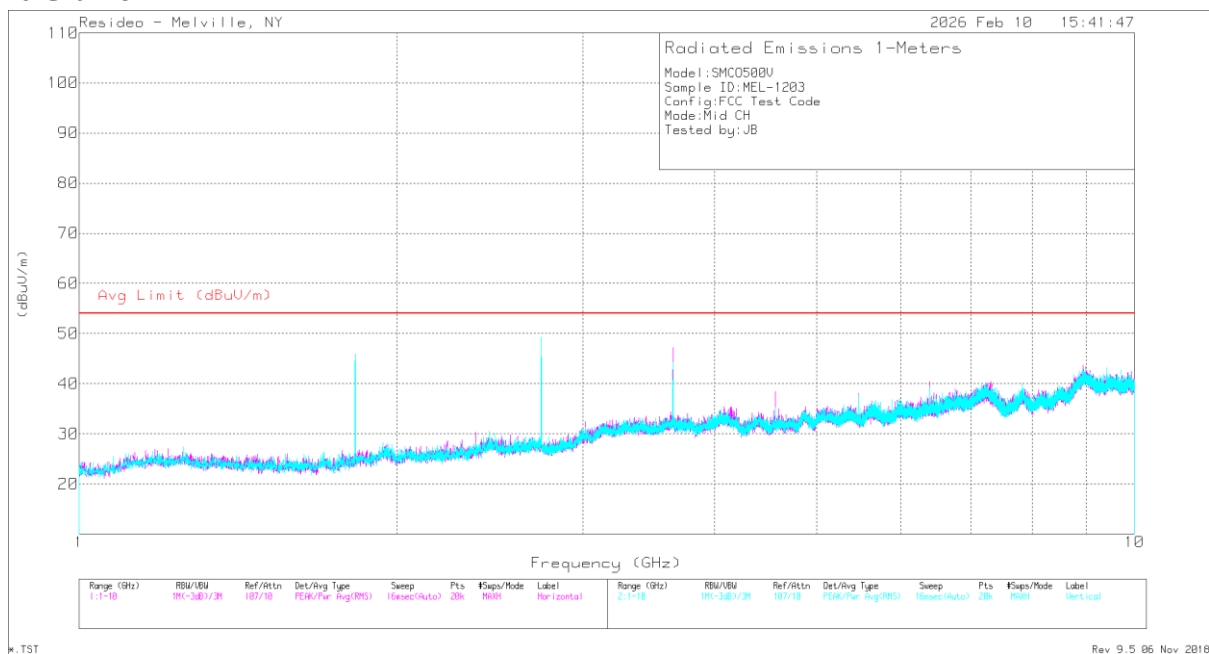


Figure 11 1 GHz-10 GHz prescan - Mid channel

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	2023-3MH	Pream p No Filter_10-5-18	SMA Cabl es_2 025	HP Filter3 900M_2 025	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degrees)	Height (cm)	Polarit y
1.827	51.83	PK2	26.8	-42	5.7	.8	43.13	-	-	74	-30.87	189	117	H
1.827	47	MAV1	26.8	-42	5.7	.8	38.3	54	-15.7	-	-	189	117	H
* 2.74	57	PK2	29.6	-43.4	6.9	.7	50.8	-	-	74	-23.2	338	102	H
* 2.74	54.11	MAV1	29.6	-43.4	6.9	.7	47.91	54	-6.09	-	-	338	102	H
* 3.653	54.73	PK2	31.6	-42	8	.8	53.13	-	-	74	-20.87	48	285	H
* 3.653	50.1	MAV1	31.6	-42	8	.8	48.5	54	-5.5	-	-	48	285	H
* 4.566	47.52	PK2	32.1	-41.9	8.6	.5	46.82	-	-	74	-27.18	305	256	H
* 4.566	39.72	MAV1	32.1	-41.9	8.6	.5	39.02	54	-14.98	-	-	305	256	H
1.827	53.44	PK2	26.8	-42	5.7	.8	44.74	-	-	74	-29.26	126	256	V
1.827	49.5	MAV1	26.8	-42	5.7	.8	40.8	54	-13.2	-	-	126	256	V
* 2.74	60.13	PK2	29.6	-43.4	6.9	.7	53.93	-	-	74	-20.07	31	354	V
* 2.74	58.11	MAV1	29.6	-43.4	6.9	.7	51.91	54	-2.09	-	-	31	354	V
* 3.654	53.83	PK2	31.6	-42	8	.8	52.23	-	-	74	-21.77	96	308	V
* 3.653	47.71	MAV1	31.6	-42	8	.8	46.11	54	-7.89	-	-	96	308	V
5.478	52.65	PK2	34.4	-41.6	9.7	.6	55.75	-	-	74	-18.25	120	273	V
5.479	33.19	MAV1	34.4	-41.5	9.7	.6	36.39	54	-17.61	-	-	120	273	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAV1 - KDB558074 Option 1 Maximum RMS Average

FCC Pt15 Subpart C 1-18GHz - Preamp In Filter Out (HP Filter In) (2025).TST

Rev 9.5 01 Nov 2018

High Channel

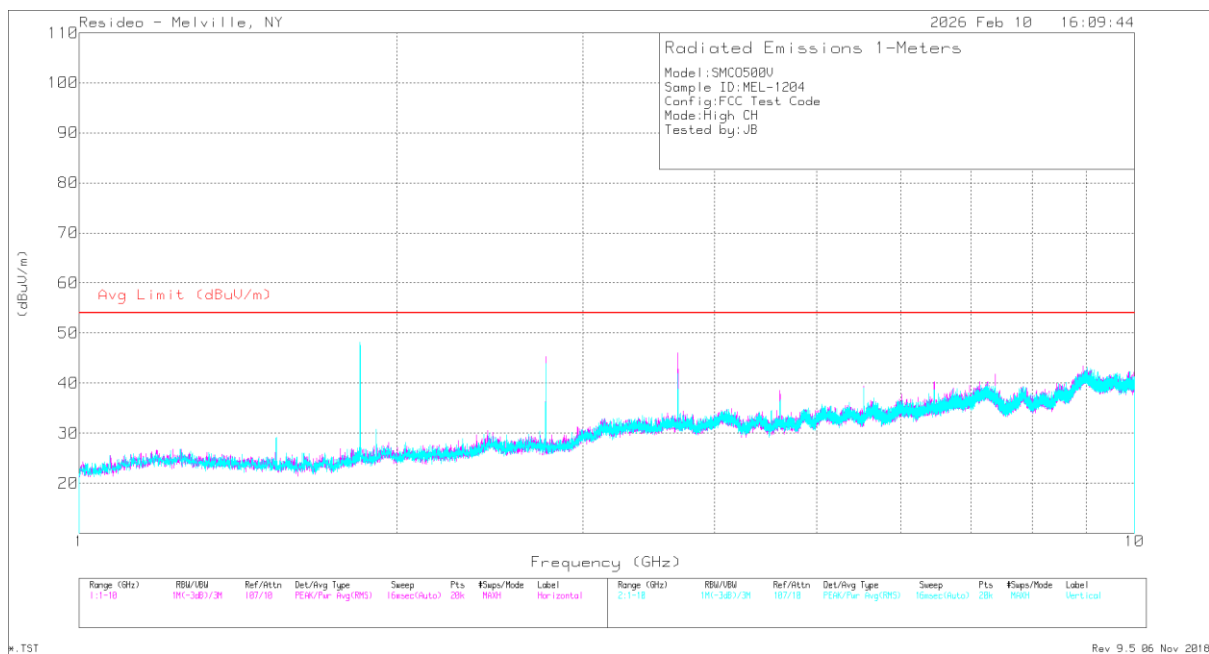


Figure 12 1 GHz-10 GHz prescan - High channel

Radiated Emissions

Frequency (GHz)	Meter Reading (dBUV)	Det	2023-3MH	Preamp No Filter 10-5-18	SMA Cables 2025	HP Filter3 900M 2025	Corrected Reading (dBUV/m)	Avg Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.846	51.92	PK2	27	-42.1	5.8	.9	43.52	-	-	74	-30.48	186	221	H
1.846	46.65	MAV1	27	-42.1	5.8	.9	38.25	54	-15.75	-	-	186	221	H
* 2.769	57.66	PK2	29.5	-43.4	7	.7	51.46	-	-	74	-22.54	133	382	H
* 2.769	54.92	MAV1	29.5	-43.4	7	.7	48.72	54	-5.28	-	-	133	382	H
* 3.691	51.69	PK2	31.8	-41.9	8	.8	50.39	-	-	74	-23.61	52	298	H
* 3.692	47.41	MAV1	31.8	-41.9	8	.8	46.11	54	-7.89	-	-	52	298	H
* 4.615	47.36	PK2	32.2	-41.9	8.7	.5	46.86	-	-	74	-27.14	302	251	H
* 4.614	40.22	MAV1	32.2	-41.9	8.7	.5	39.72	54	-14.28	-	-	302	251	H
1.846	53.18	PK2	27	-42.1	5.8	.9	44.78	-	-	74	-29.22	144	391	V
1.846	48.91	MAV1	27	-42.1	5.8	.9	40.51	54	-13.49	-	-	144	391	V
* 2.768	57.8	PK2	29.5	-43.4	7	.7	51.6	-	-	74	-22.4	40	345	V
* 2.769	54.91	MAV1	29.5	-43.4	7	.7	48.71	54	-5.29	-	-	40	345	V
* 3.692	52.34	PK2	31.8	-41.9	8	.8	51.04	-	-	74	-22.96	156	352	V
* 3.691	48.2	MAV1	31.8	-41.9	8	.8	46.9	54	-7.1	-	-	156	352	V
5.537	59.46	PK2	34.5	-41.3	9.7	.5	62.86	-	-	74	-11.14	166	323	V
5.537	34.89	MAV1	34.5	-41.3	9.7	.5	38.29	54	-15.71	-	-	166	323	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAV1 - KDB558074 Option 1 Maximum RMS Average

FCC Pt15 Subpart C 1-18GHz - Preamp In Filter Out (HP Filter In) (2025).TST

Rev 9.5 01 Nov 2018

Report #: RESI-28001



END OF REPORT