

P61 WCDMA II_RMC12.2k_Ch9262_Right Side_0cm_Sensor on

DUT: Tablet Computer;

Communication System: UID 0, UMTS-FDD (WCDMA) (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.489$ S/m; $\epsilon_r = 52.214$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 21.6 °C



DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(8.16, 8.16, 8.16); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (6x16x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.803 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 23.36 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 1.51 W/kg
SAR(1 g) = 0.748 W/kg; SAR(10 g) = 0.345 W/kg
Maximum value of SAR (measured) = 1.03 W/kg

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 23.36 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 0.918 W/kg
SAR(1 g) = 0.562 W/kg; SAR(10 g) = 0.309 W/kg

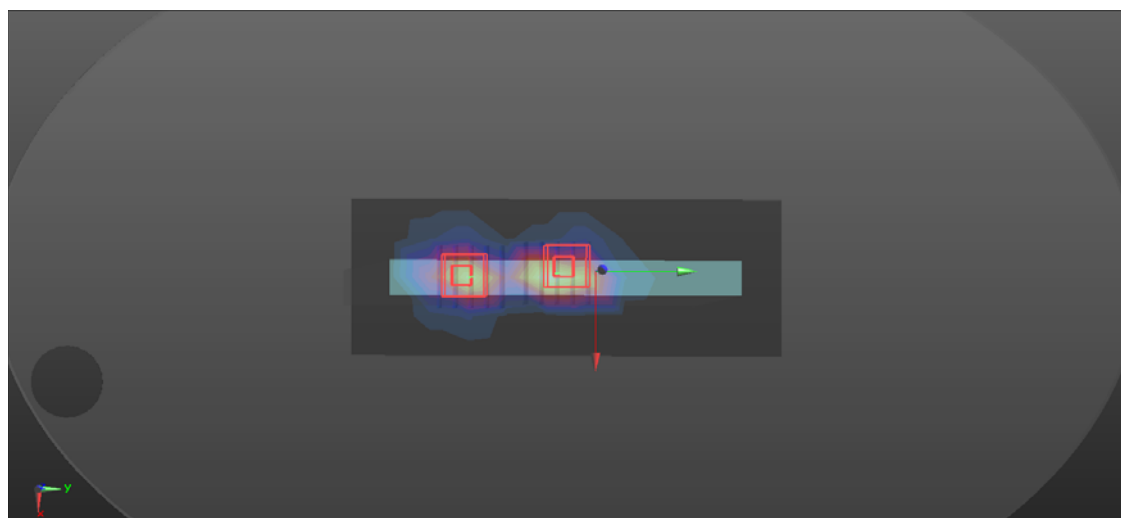

P71 WCDMA IV_RMC12.2k_Ch1312_Right Side_0cm_Sensor on

DUT: Tablet Computer;

Communication System: UID 0, UMTS-FDD (WCDMA) (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.437$ S/m; $\epsilon_r = 52.519$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.0 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(8.45, 8.45, 8.45); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (6x16x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.11 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 27.02 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.851 W/kg; SAR(10 g) = 0.501 W/kg

Maximum value of SAR (measured) = 1.14 W/kg

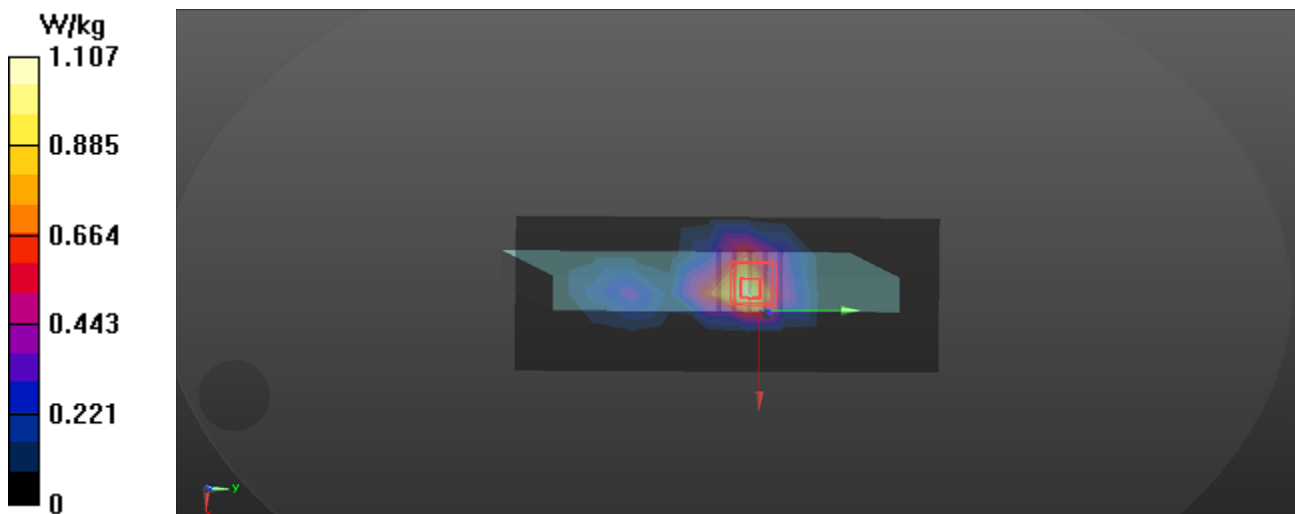

P80 WCDMA V_RMC12.2k_Ch4132_Rear Face_0cm_Sensor on

DUT: Tablet Computer;

Communication System: UID 0, UMTS-FDD (WCDMA) (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.985$ S/m; $\epsilon_r = 56.11$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.2 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(10.39, 10.39, 10.39); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (14x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.209 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.756 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.260 W/kg

SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.092 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

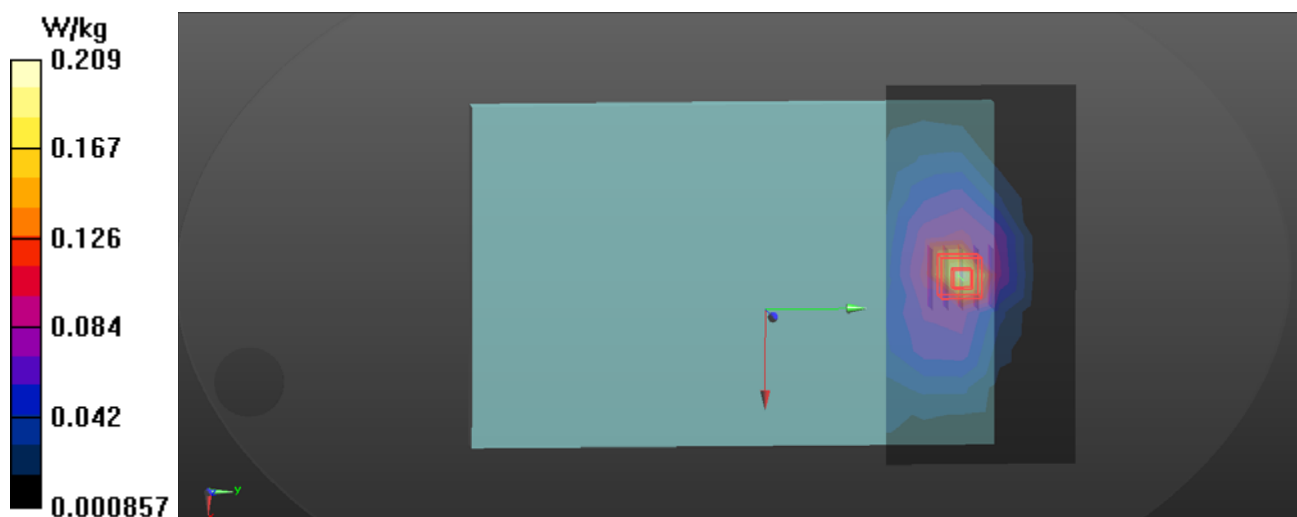

P501 LTE 4_QPSK20M_Ch20050_1RB Offset 0_Right Side_0cm_Sensor on

DUT: Tablet Computer;


Communication System: UID 0, Generic LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1720$ MHz; $\sigma = 1.445$ S/m; $\epsilon_r = 52.486$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.0 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(8.45, 8.45, 8.45); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (6x16x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.892 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 23.40 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 1.09 W/kg
SAR(1 g) = 0.635 W/kg; SAR(10 g) = 0.376 W/kg
Maximum value of SAR (measured) = 0.878 W/kg

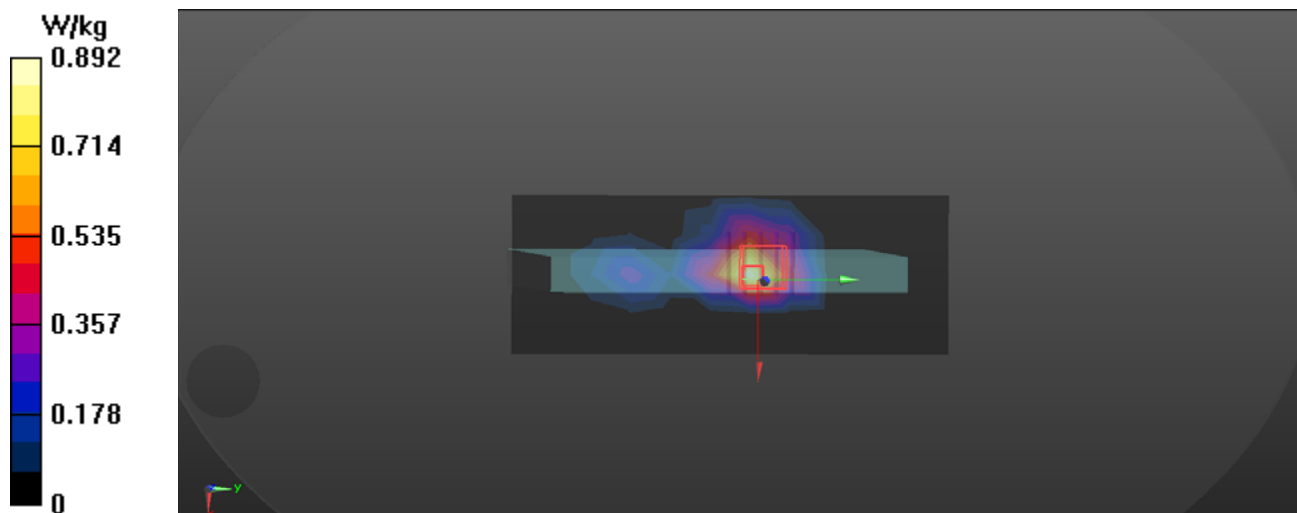

P510 LTE 4_QPSK20M_Ch20050_50RB Offset 25_Right Side_0cm_Sensor on

DUT: Tablet Computer;


Communication System: UID 0, Generic LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1720$ MHz; $\sigma = 1.445$ S/m; $\epsilon_r = 52.486$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.0 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(8.45, 8.45, 8.45); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (6x16x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.825 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 22.14 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.824 W/kg
SAR(1 g) = 0.474 W/kg; SAR(10 g) = 0.274 W/kg
Maximum value of SAR (measured) = 0.659 W/kg

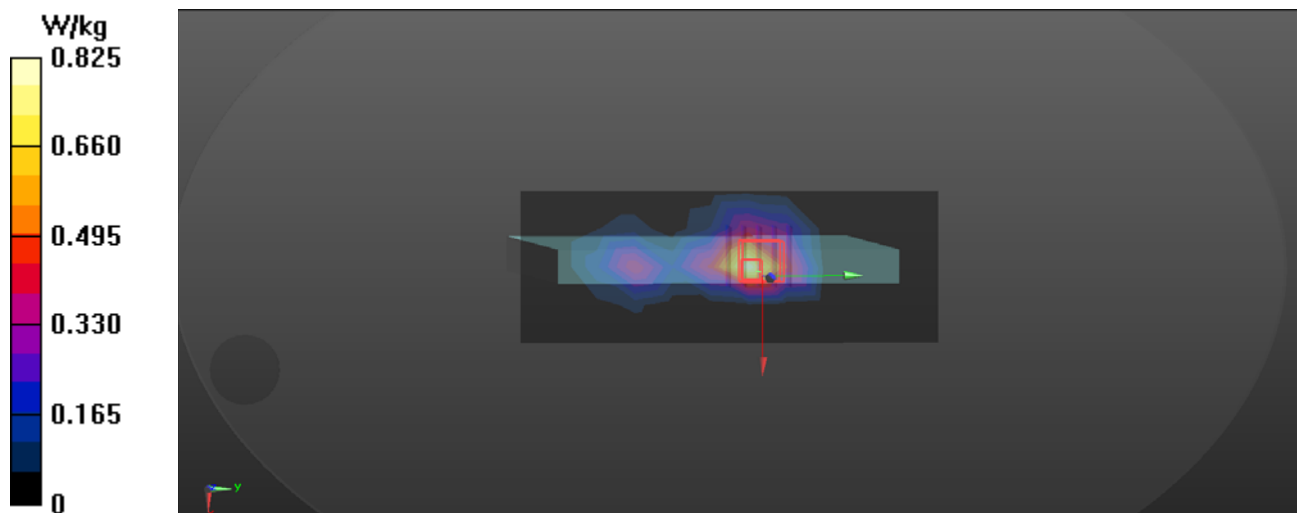

P653 LTE 5_QPSK10M_Ch20450_1RB Offset 0_Rear Face_0cm_Sensor on**DUT: Tablet Computer;**


Communication System: UID 0, Generic LTE (0); Frequency: 829 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 829$ MHz; $\sigma = 0.979$ S/m; $\epsilon_r = 54.456$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.0 °C; Liquid Temperature : 21.8 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(10.39, 10.39, 10.39); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (14x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.173 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 0.8010 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.227 W/kg
SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.080 W/kg
Maximum value of SAR (measured) = 0.179 W/kg

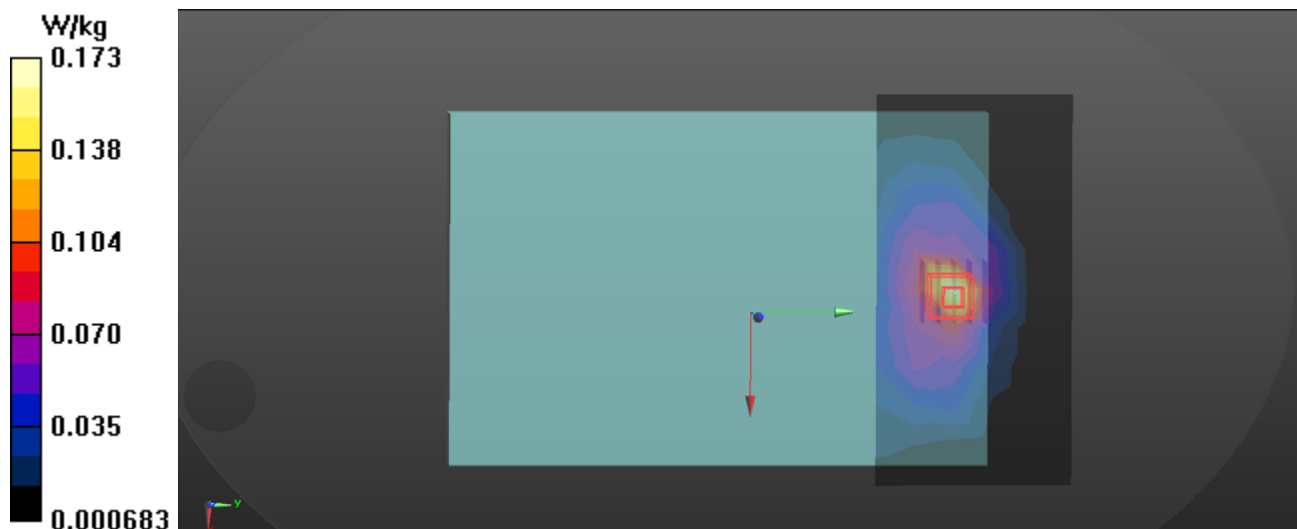

P657 LTE 5_QPSK10M_Ch20450_25RB Offset 12_Rear Face_0cm_Sensor on**DUT: Tablet Computer;**

Communication System: UID 0, Generic LTE (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 829$ MHz; $\sigma = 0.979$ S/m; $\epsilon_r = 54.456$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.0 °C; Liquid Temperature : 21.8 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(10.39, 10.39, 10.39); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (14x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.174 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 0.7990 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.226 W/kg

SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.079 W/kg

Maximum value of SAR (measured) = 0.179 W/kg

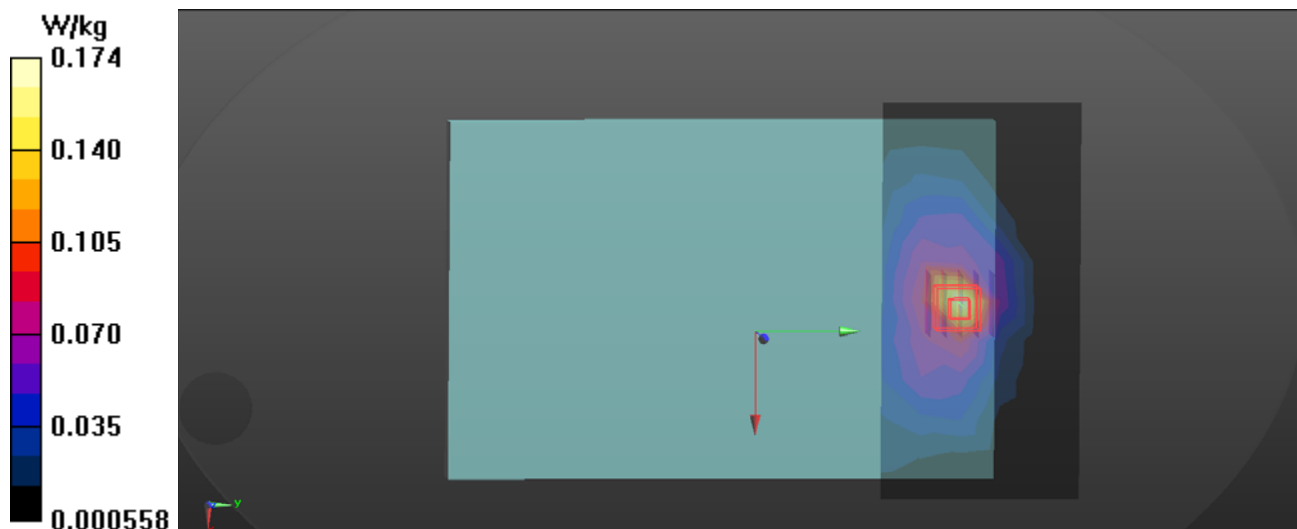

P525 LTE 7_QPSK20M_Ch20850_1RB Offset 50_Rear Face_0cm_Sensor on**DUT: Tablet Computer;**


Communication System: UID 0, Generic LTE (0); Frequency: 2510 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2510$ MHz; $\sigma = 2.091$ S/m; $\epsilon_r = 52.725$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.1 °C; Liquid Temperature : 22.0 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(7.52, 7.52, 7.52); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (19x8x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 1.13 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 1.637 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 1.95 W/kg
SAR(1 g) = 0.937 W/kg; SAR(10 g) = 0.427 W/kg
Maximum value of SAR (measured) = 1.39 W/kg

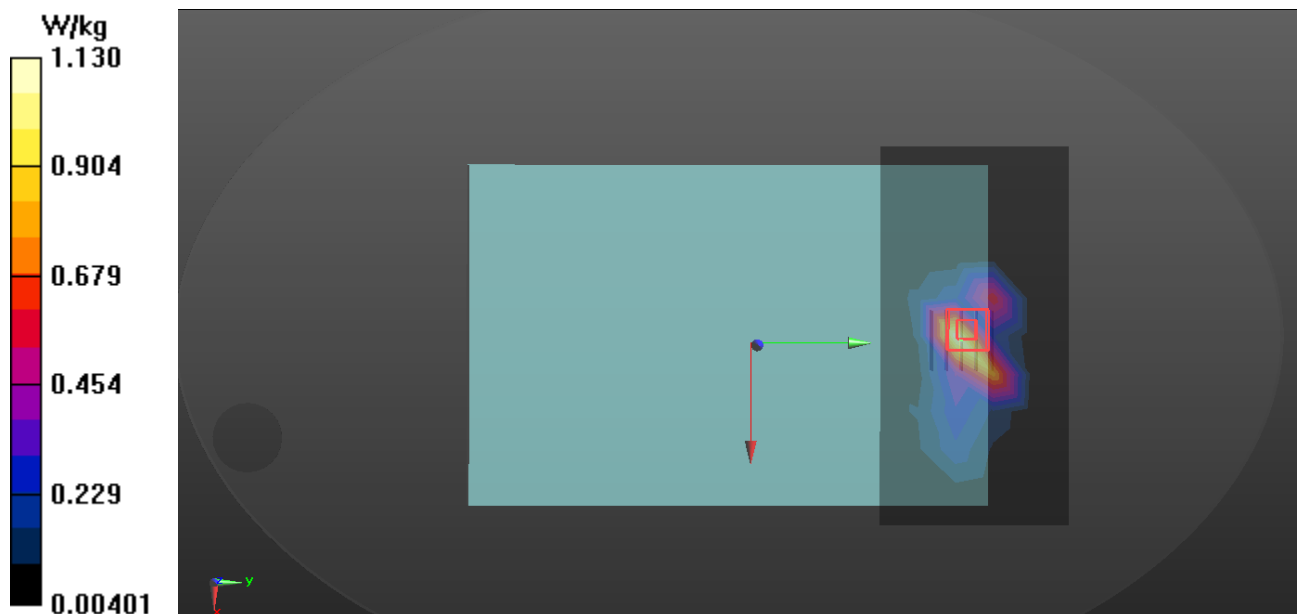

P533 LTE 7_QPSK20M_Ch20850_50RB Offset 25_Rear Face_0cm_Sensor on**DUT: Tablet Computer;**


Communication System: UID 0, Generic LTE (0); Frequency: 2510 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2510$ MHz; $\sigma = 2.091$ S/m; $\epsilon_r = 52.725$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.1 °C; Liquid Temperature : 22.0 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(7.52, 7.52, 7.52); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (18x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 1.17 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 0.3530 V/m; Power Drift = 0.16 dB
Peak SAR (extrapolated) = 1.97 W/kg
SAR(1 g) = 0.949 W/kg; SAR(10 g) = 0.432 W/kg
Maximum value of SAR (measured) = 1.38 W/kg

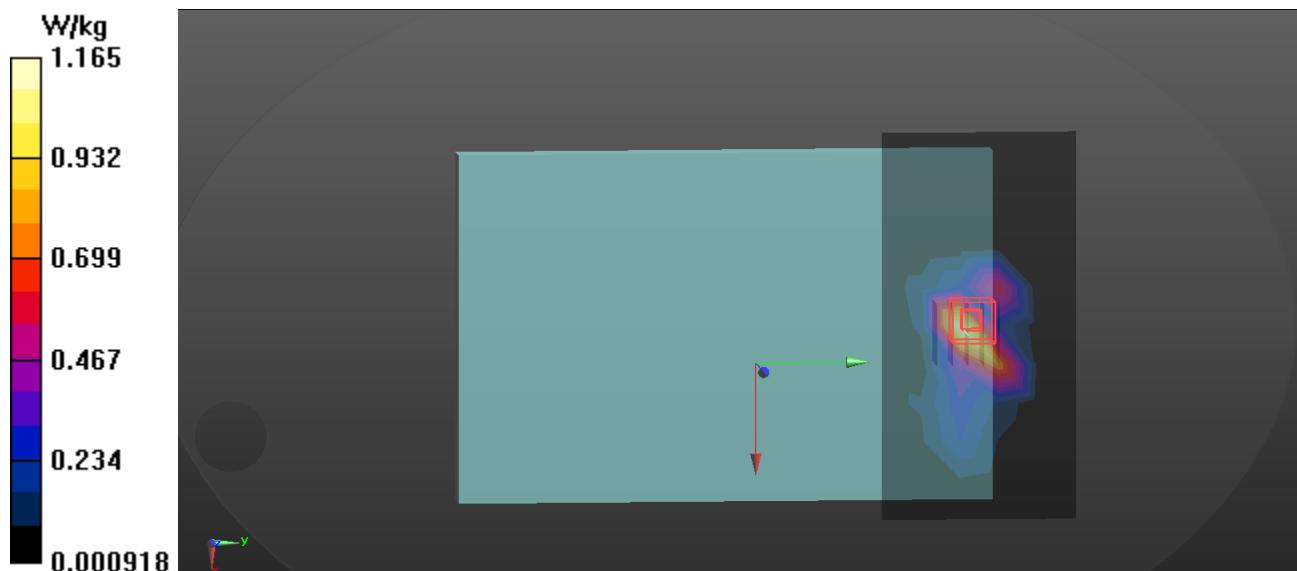

P537 LTE 12_QPSK10M_Ch23095_1RB Offset 0_Rear Face_0cm_Sensor on**DUT: Tablet Computer;**

Communication System: UID 0, Generic LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 56.489$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(10.55, 10.55, 10.55); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (14x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.339 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 3.642 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.437 W/kg

SAR(1 g) = 0.280 W/kg; SAR(10 g) = 0.175 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.349 W/kg

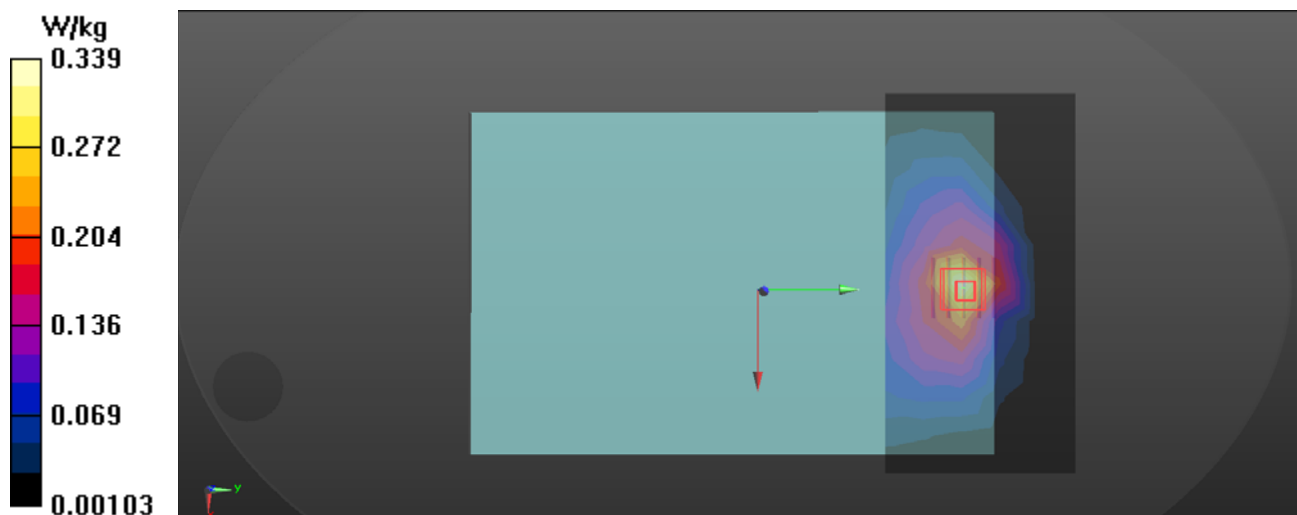

P546 LTE 12_QPSK10M_Ch23095_25RB Offset 25_Rear Face_0cm_Sensor on**DUT: Tablet Computer;**

Communication System: UID 0, Generic LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 56.489$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.1 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(10.55, 10.55, 10.55); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (14x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.296 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 3.433 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.380 W/kg

SAR(1 g) = 0.241 W/kg; SAR(10 g) = 0.150 W/kg

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.304 W/kg

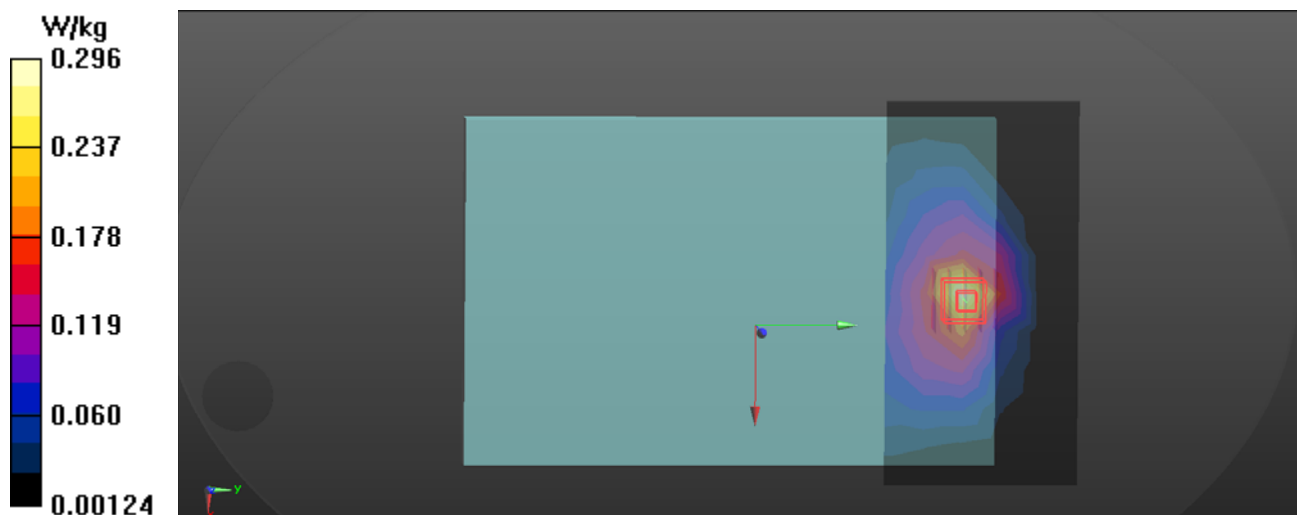

P554 LTE 13_QPSK10M_Ch23230_1RB Offset 0_Rear Face_0cm_Sensor on**DUT: Tablet Computer;**


Communication System: UID 0, Generic LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.992 \text{ S/m}$; $\epsilon_r = 54.936$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(10.55, 10.55, 10.55); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (14x8x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.169 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 2.132 V/m ; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.212 W/kg
SAR(1 g) = 0.132 W/kg ; SAR(10 g) = 0.080 W/kg
Maximum value of SAR (measured) = 0.171 W/kg

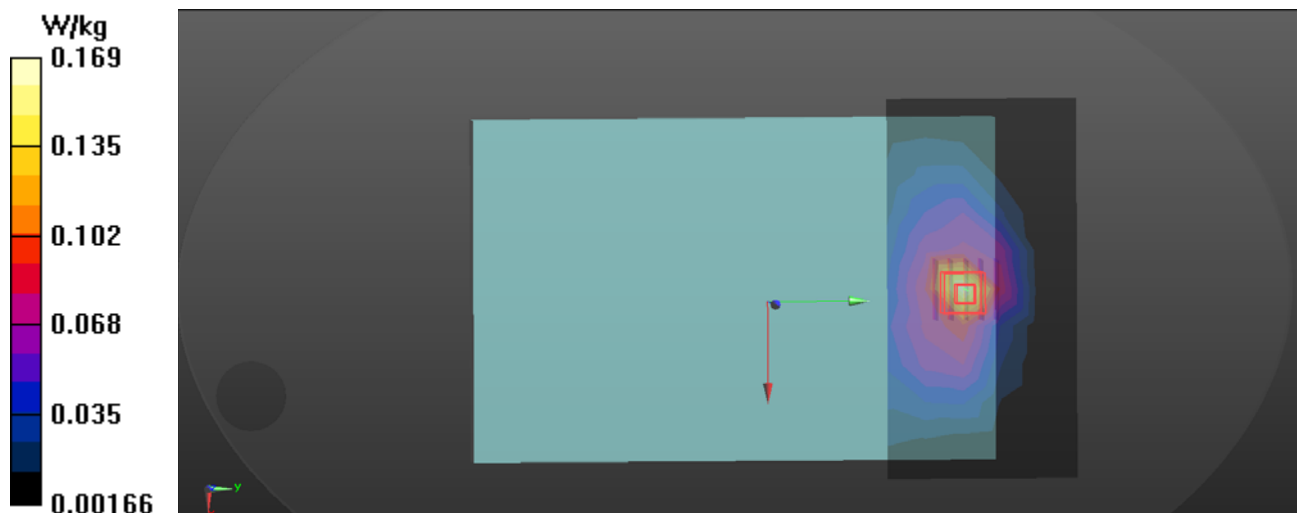

P563 LTE 13_QPSK10M_Ch23230_25RB Offset 0_Rear Face_0cm_Sensor on**DUT: Tablet Computer;**


Communication System: UID 0, Generic LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.992 \text{ S/m}$; $\epsilon_r = 54.936$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(10.55, 10.55, 10.55); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (14x8x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.161 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 2.122 V/m ; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.200 W/kg
SAR(1 g) = 0.126 W/kg ; SAR(10 g) = 0.076 W/kg
Maximum value of SAR (measured) = 0.163 W/kg

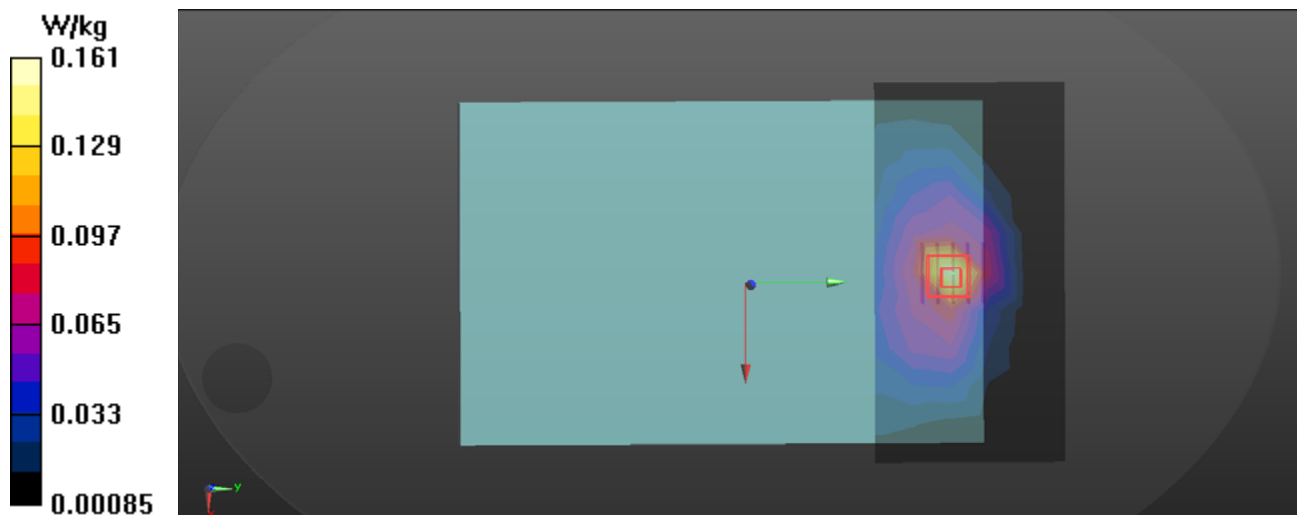

P589 LTE 25_QPSK20M_Ch26140_1RB Offset 0_Right Side_0cm_Sensor on**DUT: Tablet Computer;**

Communication System: UID 0, Generic LTE (0); Frequency: 1850 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1850$ MHz; $\sigma = 1.487$ S/m; $\epsilon_r = 52.222$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 21.6 °C


DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(8.16, 8.16, 8.16); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (6x16x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.756 W/kg

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 23.63 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 1.41 W/kg
SAR(1 g) = 0.707 W/kg; SAR(10 g) = 0.324 W/kg
Maximum value of SAR (measured) = 0.998 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 23.63 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.842 W/kg
SAR(1 g) = 0.511 W/kg; SAR(10 g) = 0.280 W/kg
Maximum value of SAR (measured) = 0.690 W/kg

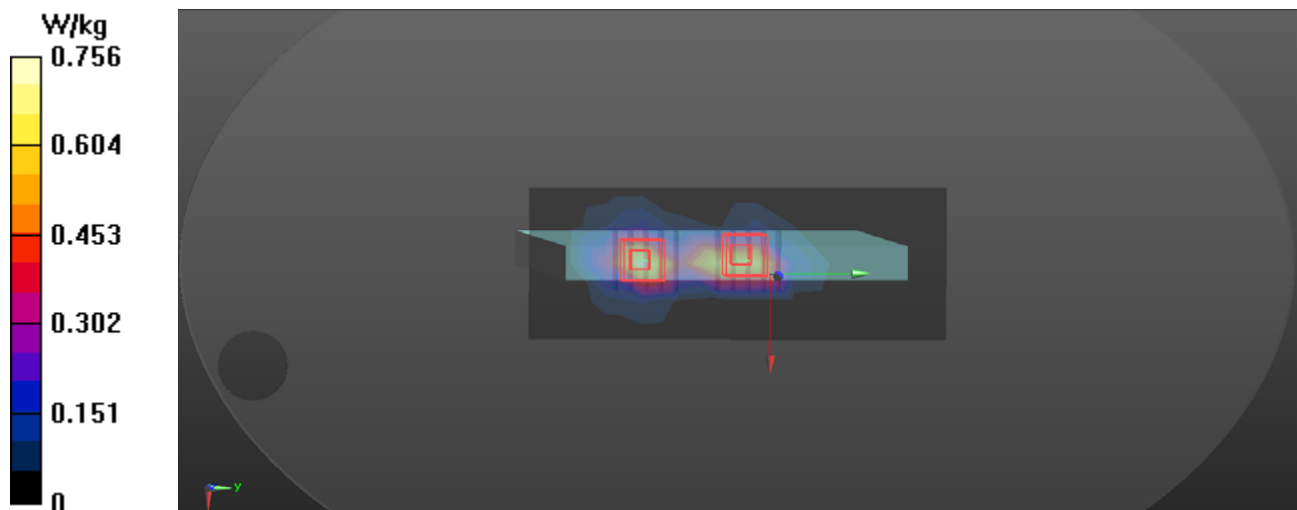

P597 LTE 25_QPSK20M_Ch26140_50RB Offset 0_Right Side_0cm_Sensor on**DUT: Tablet Computer;**

Communication System: UID 0, Generic LTE (0); Frequency: 1850 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1850$ MHz; $\sigma = 1.487$ S/m; $\epsilon_r = 52.222$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 21.6 °C


DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(8.16, 8.16, 8.16); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (6x16x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.727 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 24.80 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 1.44 W/kg
SAR(1 g) = 0.718 W/kg; SAR(10 g) = 0.327 W/kg
Maximum value of SAR (measured) = 1.03 W/kg

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 24.80 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.899 W/kg
SAR(1 g) = 0.544 W/kg; SAR(10 g) = 0.296 W/kg
Maximum value of SAR (measured) = 0.737 W/kg

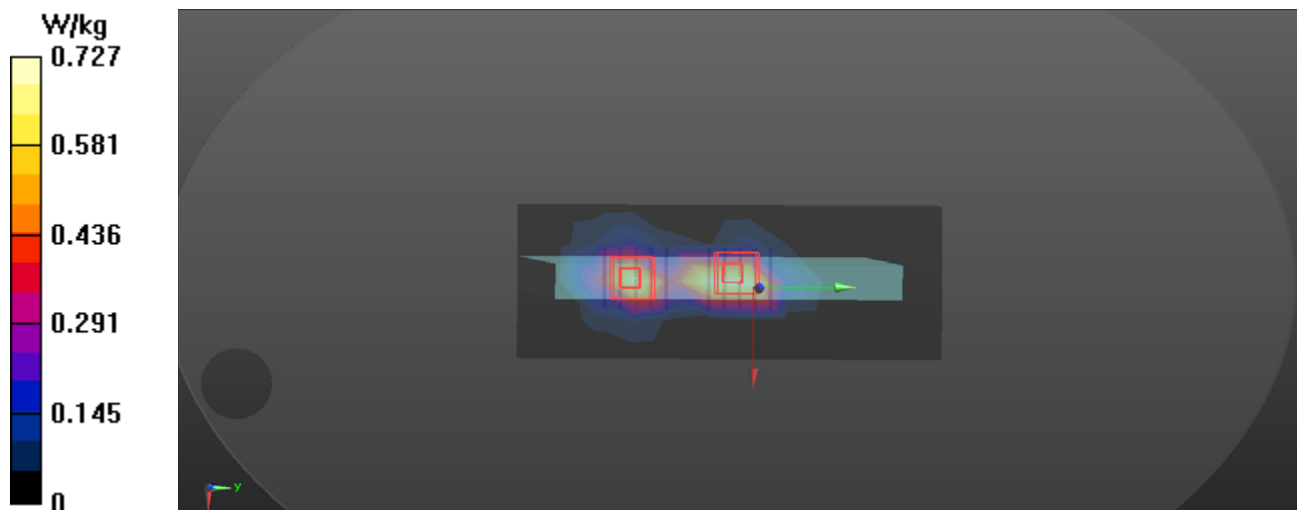

P640 LTE 30_QPSK10M_Ch27710_1RB Offset 0_Rear Face_0cm_Sensor on**DUT: Tablet Computer;**


Communication System: UID 0, Generic LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2310$ MHz; $\sigma = 1.864$ S/m; $\epsilon_r = 51.786$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.0 °C; Liquid Temperature : 21.9 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(7.89, 7.89, 7.89); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (18x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.478 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 1.284 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 0.694 W/kg
SAR(1 g) = 0.366 W/kg; SAR(10 g) = 0.189 W/kg
Maximum value of SAR (measured) = 0.523 W/kg

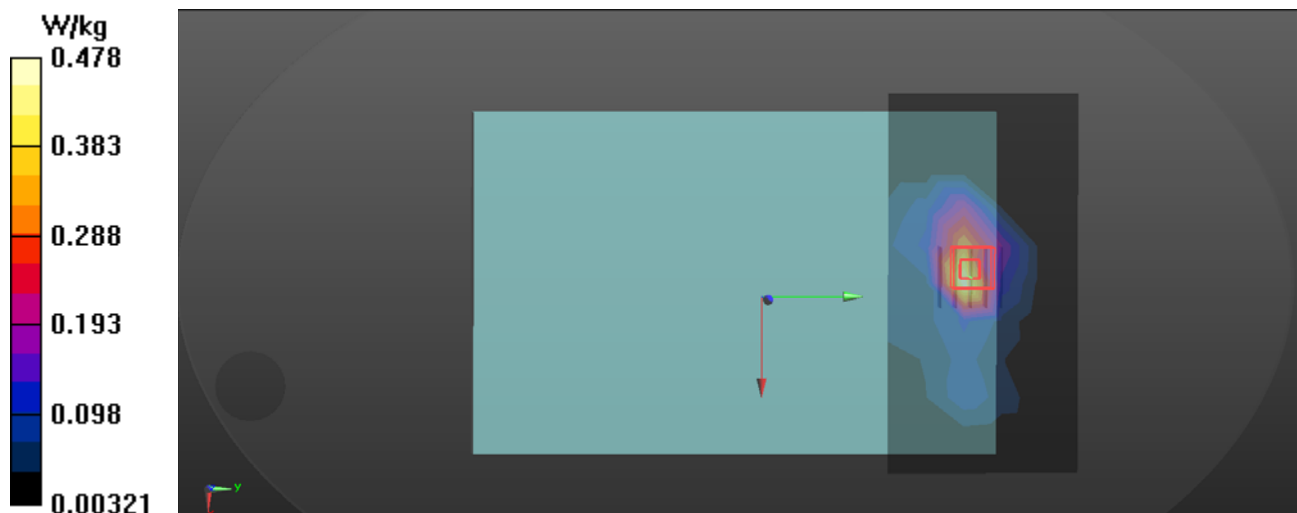

P647 LTE 30_QPSK10M_Ch27710_25RB Offset 0_Rear Face_0cm_Sensor on**DUT: Tablet Computer;**


Communication System: UID 0, Generic LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2310$ MHz; $\sigma = 1.864$ S/m; $\epsilon_r = 51.786$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.0 °C; Liquid Temperature : 21.9 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(7.89, 7.89, 7.89); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (18x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.476 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 0.9120 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.688 W/kg
SAR(1 g) = 0.363 W/kg; SAR(10 g) = 0.185 W/kg
Maximum value of SAR (measured) = 0.512 W/kg

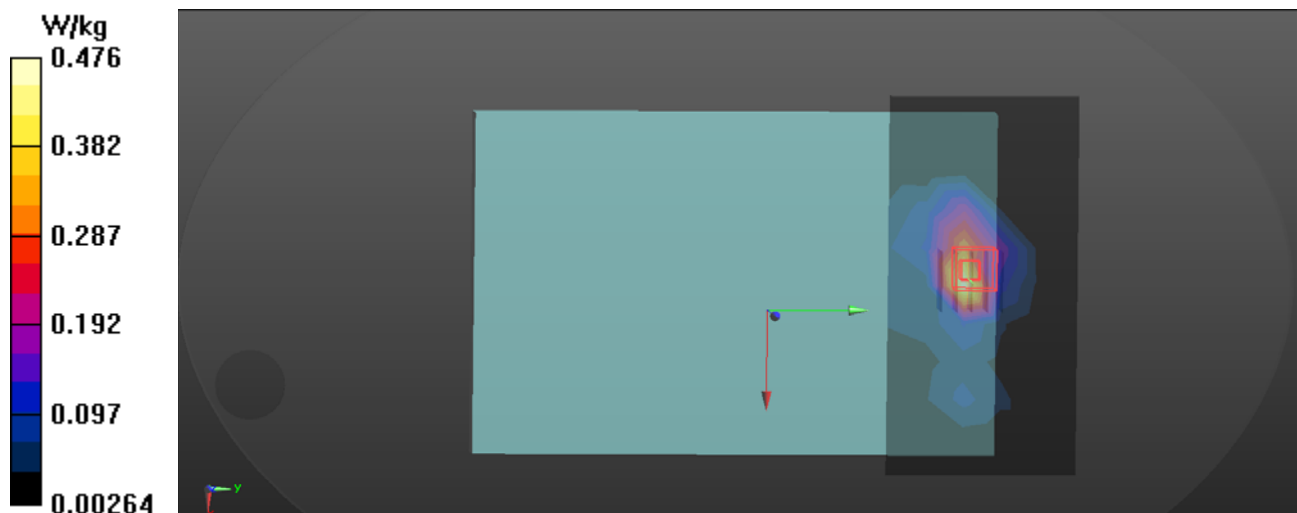

P620 LTE 41_QPSK20M_Ch40620_1RB Offset 50_Rear Face_0cm_Sensor on**DUT: Tablet Computer;**

Communication System: UID 0, Generic LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 2.2$ S/m; $\epsilon_r = 52.447$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.0 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(7.52, 7.52, 7.52); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (18x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.332 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.213 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.507 W/kg

SAR(1 g) = 0.251 W/kg; SAR(10 g) = 0.119 W/kg

Maximum value of SAR (measured) = 0.384 W/kg

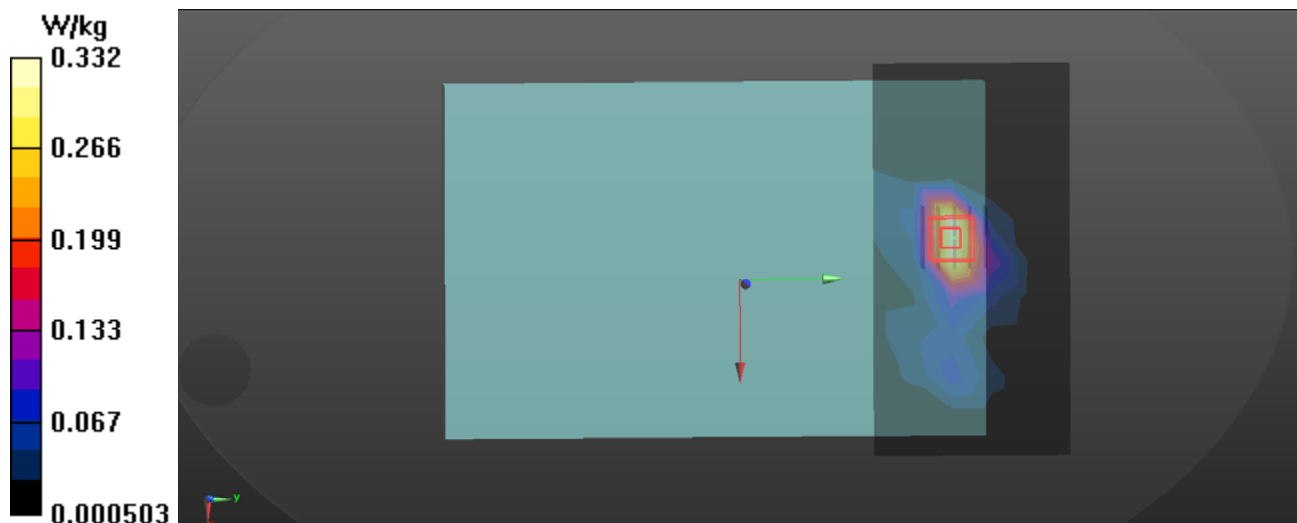

P628 LTE 41_QPSK20M_Ch40620_50RB Offset 25_Rear Face_0cm_Sensor on**DUT: Tablet Computer;**

Communication System: UID 0, Generic LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 2.2$ S/m; $\epsilon_r = 52.447$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.0 °C

DASY Configuration:

- Probe: EX3DV4 - SN7369; ConvF(7.52, 7.52, 7.52); Calibrated: 2017/8/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -19.0, 31.0$
- Electronics: DAE4 Sn1486; Calibrated: 2017/8/17
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Area Scan (18x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.333 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 0.4870 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.518 W/kg

SAR(1 g) = 0.253 W/kg; SAR(10 g) = 0.120 W/kg

Maximum value of SAR (measured) = 0.382 W/kg

