

FCC Radio Test Report

FCC ID: M82-AIM58W


Project No. : 1710T083D
Equipment : Computer
Test Model : AIM 10W
Series Model : AIM-58, AIM-58XXXXXXXXXXXXXXXXXX, AIM
10WXXXXXXXXXXXXXXXXXX (where X may be any
alphanumeric character , blank or "-".)
Applicant : Advantech Co., Ltd.
Address : No.1, Alley 20, Lane 26, Rueiguang Road, Neihu
District, Taipei 11491, Taiwan, R.O.C.

Date of Receipt : 2017/11/13
2020/12/16
Date of Test : 2017/11/13 ~ 2018/2/27
2020/12/16 ~ 2021/4/16
Issued Date : 2021/10/15
Tested by : BTL Inc.

Prepared by

: 
Jerry Chuang, Supervisor

Approved by

: 
Peter Chen, Vice Manager



BTL Inc.

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	11
3.3 DUTY CYCLE	12
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
3.5 DESCRIPTION OF SUPPORT UNITS	13
4 . EMC EMISSION TEST	14
4.1 CONDUCTED EMISSION MEASUREMENT	14
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	14
4.1.2 TEST PROCEDURE	14
4.1.3 DEVIATION FROM TEST STANDARD	14
4.1.4 TEST SETUP	15
4.1.5 EUT OPERATING CONDITIONS	15
4.1.6 EUT TEST CONDITIONS	15
4.1.7 TEST RESULTS	15
4.2 RADIATED EMISSION MEASUREMENT	16
4.2.1 RADIATED EMISSION LIMITS	16
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD	17
4.2.4 TEST SETUP	18
4.2.5 EUT OPERATING CONDITIONS	19
4.2.6 EUT TEST CONDITIONS	19
4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	19
4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)	19
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	19
5 . BANDWIDTH TEST	20
5.1 APPLIED PROCEDURES / LIMIT	20
5.1.1 TEST PROCEDURE	20
5.1.2 DEVIATION FROM STANDARD	20
5.1.3 TEST SETUP	20
5.1.4 EUT OPERATION CONDITIONS	20
5.1.5 EUT TEST CONDITIONS	20
5.1.6 TEST RESULTS	20

Table of Contents	Page
6 . MAXIMUM OUTPUT POWER TEST	21
6.1 APPLIED PROCEDURES / LIMIT	21
6.1.1 TEST PROCEDURE	21
6.1.2 DEVIATION FROM STANDARD	21
6.1.3 TEST SETUP	21
6.1.4 EUT OPERATION CONDITIONS	21
6.1.5 EUT TEST CONDITIONS	21
6.1.6 TEST RESULTS	21
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	22
7.1 APPLIED PROCEDURES / LIMIT	22
7.1.1 TEST PROCEDURE	22
7.1.2 DEVIATION FROM STANDARD	22
7.1.3 TEST SETUP	22
7.1.4 EUT OPERATION CONDITIONS	22
7.1.5 EUT OPERATION CONDITIONS	22
7.1.6 TEST RESULTS	22
8 . POWER SPECTRAL DENSITY TEST	23
8.1 APPLIED PROCEDURES / LIMIT	23
8.1.1 TEST PROCEDURE	23
8.1.2 DEVIATION FROM STANDARD	23
8.1.3 TEST SETUP	23
8.1.4 EUT OPERATION CONDITIONS	23
8.1.5 EUT TEST CONDITIONS	23
8.1.6 TEST RESULTS	23
9 . MEASUREMENT INSTRUMENTS LIST	24
10 . EUT TEST PHOTO	27
APPENDIX A - CONDUCTED EMISSION	42
APPENDIX B - RADIATED EMISSION (9KHZ TO 30MHZ)	57
APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)	70
APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)	81
APPENDIX E - BANDWIDTH	102
APPENDIX F - MAXIMUM OUTPUT POWER TEST	104
APPENDIX G - ANTENNA CONDUCTED SPURIOUS EMISSION	106
APPENDIX H - POWER SPECTRAL DENSITY TEST	108

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date
BTL-FCCP-2-1710T083D	R00	Original Report.	2021/4/27
BTL-FCCP-2-1710T083D	R01	Revised report to address TCB's comments.	2021/9/8
BTL-FCCP-2-1710T083D	R02	Revised typo.	2021/10/15

1. CERTIFICATION

Equipment : Computer
Brand Name : ADVANTECH
Test Model : AIM 10W
Series Model : AIM-58, AIM-58XXXXXXXXXXXXXXXXXX, AIM 10WXXXXXXXXXXXXXXXXXX
(where X may be any alphanumeric character , blank or "-".)
Applicant : Advantech Co., Ltd.
Manufacturer : Advantech Co., Ltd.
Address : No.1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei 11491, Taiwan,
R.O.C.
Factory : N/A
Address : N/A
Date of Test : 2017/11/13 ~ 2018/2/27
2020/12/16 ~ 2021/4/16
Test Sample : Production Unit
Standard(s) : FCC Part15, Subpart C (15.247)
ANSI C63.10-2013

The above equipment has been tested and found in compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-2-1710T083D) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO/IEC 17025 quality assessment standard and technical standard(s).

Test results included in this report is only for the Bluetooth LE part.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C			
Standard(s) Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(d)	Antenna conducted Spurious Emission	PASS	
15.247(a)(2)	6dB Bandwidth	PASS	
15.247(b)(3)	Peak Output Power	PASS	
15.247(e)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	
15.247(d)/ 15.205/ 15.209	Transmitter Radiated Emissions	PASS	

NOTE:

(1) "N/A" denotes test is not applicable to this device.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

The test sites and facilities are covered under FCC RN: 674415 and DN: TW0659.

☒ C05 ☐ CB08 ☐ CB11 ☒ CB15 ☐ CB16
☒ SR05

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
C05	CISPR	150 kHz ~ 30MHz	3.44

B. Radiated emissions test :

Test Site	Measurement Frequency Range	U,(dB)
CB15	0.03 GHz ~ 0.2 GHz	4.17
	0.2 GHz ~ 1 GHz	4.72
	1 GHz ~ 6 GHz	5.21
	6 GHz ~ 18 GHz	5.51
	18 GHz ~ 26 GHz	3.69
	26 GHz ~ 40 GHz	4.23

C. Conducted test :

Test Item	U,(dB)
Number of Hopping Frequency	0.00
Average Time of Occupancy	1.20
Hopping Channel Separation	1.20
Bandwidth	1.13
Peak Output Power	1.06
Antenna conducted Spurious Emission	1.14
Conducted Band edges	1.13

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Computer	
Brand Name	ADVANTECH	
Test Model	AIM 10W	
Series Model	AIM-58, AIM-58XXXXXXXXXXXXXXXXXX, AIM 10WXXXXXXXXXXXXXXXXXX (where X may be any alphanumeric character , blank or "-".)	
Model Difference	The market distribution is different only.	
Output Power (Max.)	Operation Frequency	2402~2480 MHz
	Modulation Technology	GFSK(1Mbps)
	Bit Rate of Transmitter	
	Output Power (Max.)	1.74 dBm (1Mbps)
	Output Power (Max.) Spot check test	1.24 dBm (1Mbps)
Power Source	DC Voltage supplied from AC/DC adapter.	
Power Rating	I/P: AC 100-240V~, 1.5A, 50~60Hz, 1.5A O/P: DC 19V---3.42A	
Products Covered	2* AC Adapter: (1) TAMURA / XEW1934N (2) FSP / FSP065-DBCM1 2* Dock: (1) Desk Docking: ADVANTECH/AIM-OFD-0000 (2) VESA Docking: ADVANTECH/AIM-DOC-0001	

NOTE:

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- (2) In this report, the test results of below items refer to BTL-FCCP-2-1710083 report due to the device is identical to the original device of the referencing report, except added series models and added an external power adapter.

- a. Conducted Emission
- b. Antenna conducted Spurious Emission
- c. 6dB Bandwidth
- d. Peak Output Power
- e. Power Spectral Density
- f. Transmitter Radiated Emissions(30MHZ TO 1000MHZ & ABOVE 1000MHZ)

Spot checks are applied to below items:

- a. Peak Output Power
- b. Transmitter Radiated Emissions (ABOVE 1000MHZ)

After evaluated, the changes with respect to the original device below items are tested.

- a. Conducted Emission
- b. Transmitter Radiated Emissions (30MHZ TO 1000MHZ)

(3) Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

(4) Table for Filed Antenna

Ant.	Brand	Model	Antenna Type	Connector	Gain (dBi)
1	INPAQ	WA-F-LB-02-113	PIFA	I-pex	0.65

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode NOTE (1)

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 1	TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX Mode NOTE (1)

Note:

- (1) The measurements are performed at the high, middle, low available channels.
- (2) Orthogonal axis X is found to be the worst case and recorded.


3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of BT LE

Test Software Version	DOC		
Frequency (MHz)	2402	2440	2480
BT LE	Default	Default	Default

3.3 DUTY CYCLE


If duty cycle is $\geq 98\%$, duty factor is not required.
If duty cycle is $< 98\%$, duty factor shall be considered.

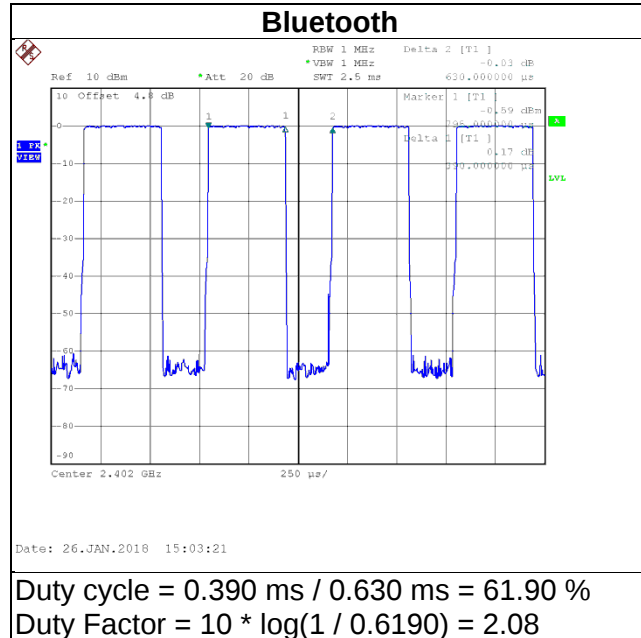

Note:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 kHz (Duty cycle $< 98\%$).

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

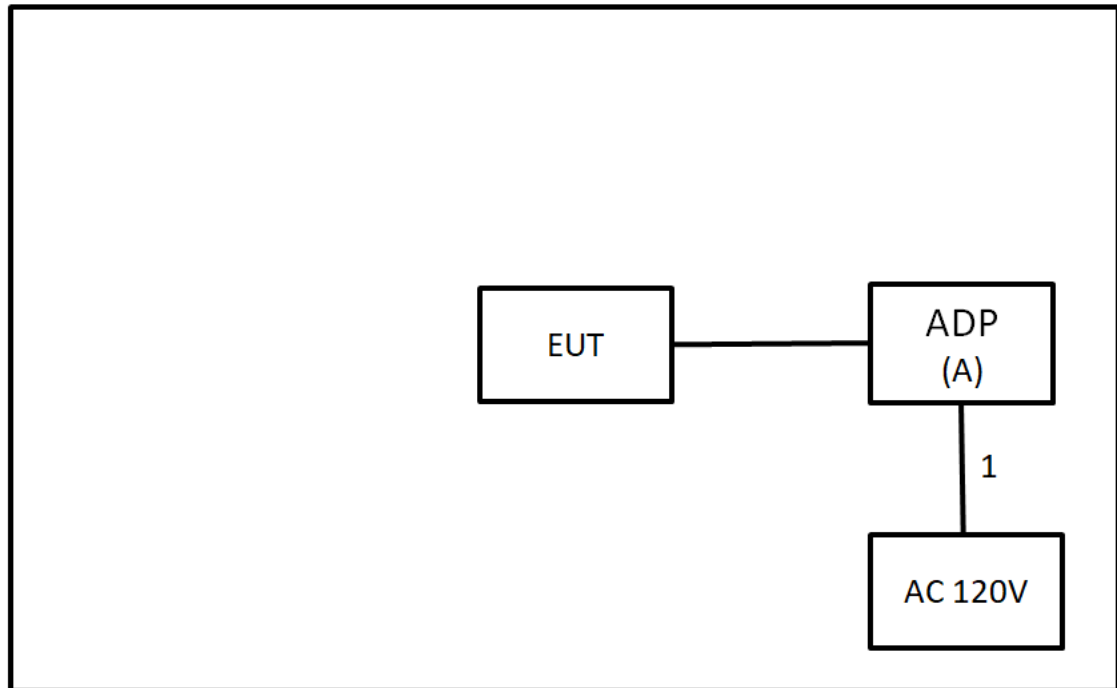

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	Adapter	FSP GROUP INC	FSP065-DBCM1	N/A	Supplied by test requester

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	N/A	N/A	1.1m	Power Cord	Supplied by test requester

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 -0 5	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	0	50

Note:

- (1) The limit of " * " decreases with the logarithm of the frequency
- (2) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

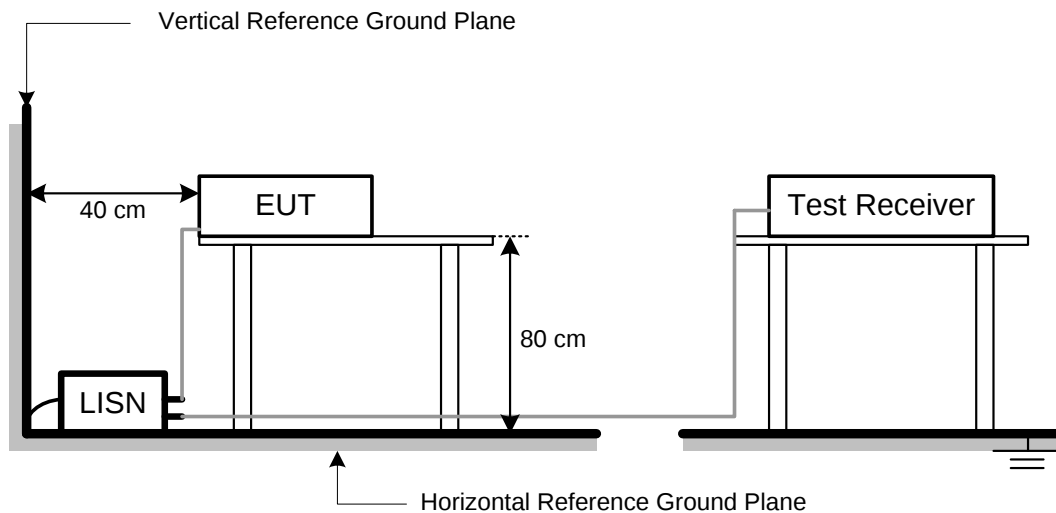

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 EUT TEST CONDITIONS

Temperature: 24°C, 19°C
Relative Humidity: 60%, 61%
Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Appendix A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of Note. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.
- (3) " N/A " denotes test is not applicable to this device.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	RBW 1MHz VBW 3MHz peak detector for Pk value RMS detector for AV value

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

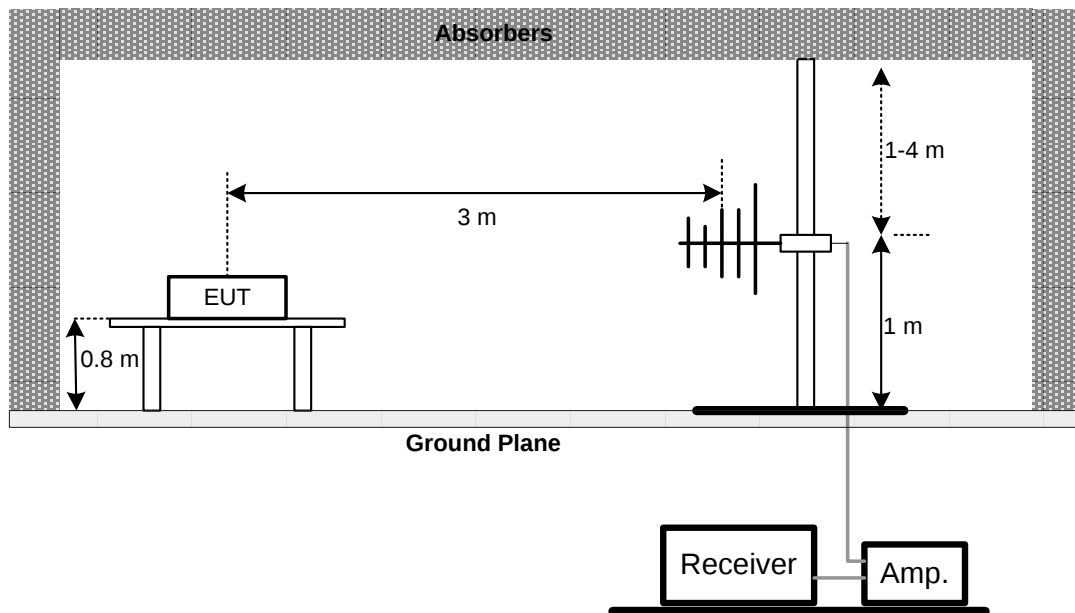

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

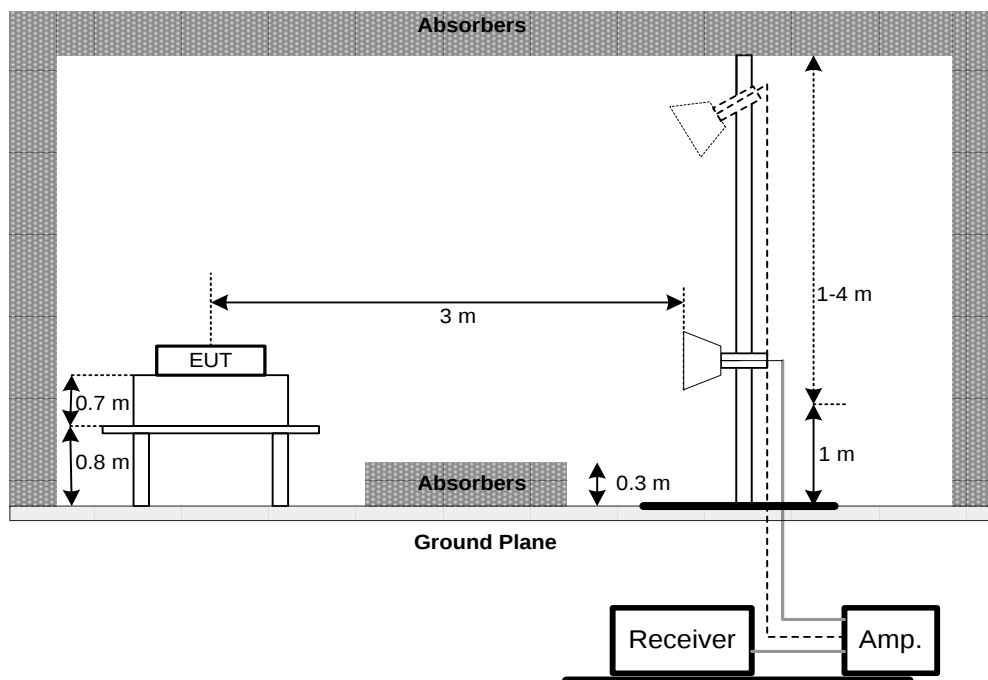

(C) For radiated emissions below 30MHz

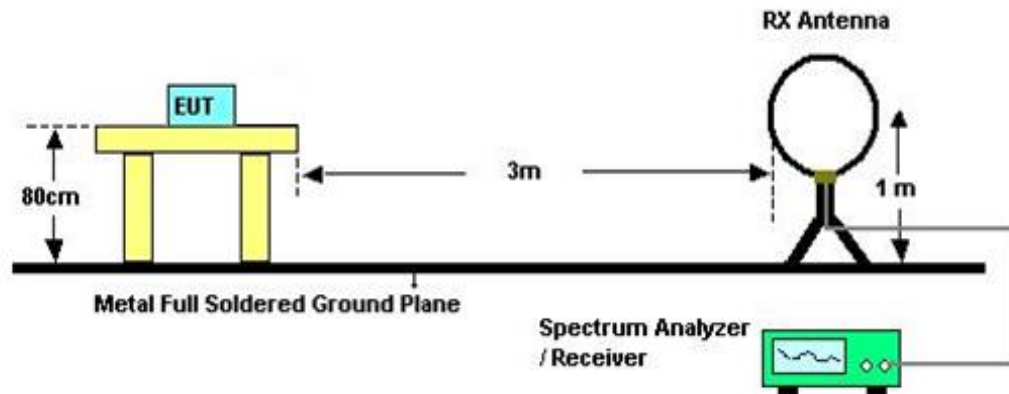

4.2.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.2.6 EUT TEST CONDITIONS

Temperature: 22°C, 21°C

Relative Humidity: 56%, 70%

Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Appendix B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Appendix C.

4.2.9 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Appendix D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 24°C
Relative Humidity: 60%
Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Appendix E.

6. MAXIMUM OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- The maximum peak conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 EUT TEST CONDITIONS

Temperature: 24°C, 22.5°C
Relative Humidity: 60%, 51%
Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Appendix F.

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 10 ms.
- c. Offset=antenna gain+cable loss

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 EUT OPERATION CONDITIONS

Temperature: 24°C
Relative Humidity: 60%
Test Voltage: AC 120V/60Hz

7.1.6 TEST RESULTS

Please refer to the Appendix G.

8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


8.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW=3KHz, VBW=10 KHz, Sweep time = auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP

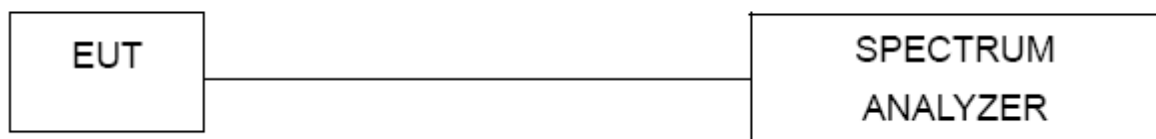

8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 24°C
Relative Humidity: 60%
Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Appendix H.

9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	Jan. 24, 2019
2	Test Cable	TIMES	CFD300-NL	C02	Jun. 13, 2019
3	EMI Test Receiver	R&S	ESR7	101433	Dec. 07, 2019
4	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A

Conducted Emission Measurement (For Adapter: FSP / FSP065-DBCM1)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	2021/6/10
2	Test Cable	EMCI	EMC400-BM-BM-5000	170501	2021/6/7
3	EMI Test Receiver	R&S	ESCI	100080	2021/6/14
4	Measurement Software	EZ	EZ EMC (Version NB-03A1-01)	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Preamplifier	EMCI	012645B	980267	Feb. 28, 2018
2	Preamplifier	EMCI	EMC02325	980217	Dec. 27, 2019
3	Preamplifier	EMCI	EMC2654045	980030	Feb. 13, 2019
4	Test Cable	EMCI	EMC104-SM-S M-8000	8m	Jan. 03, 2019
5	Test Cable	EMCI	EMC104-SM-S M-800	150207	Jan. 03, 2019
6	Test Cable	EMCI	EEMC104-SM-S M-3000	151205	Jan. 03, 2019
7	MXE EMI Receiver	Agilent	N9038A	MY55420127	Jan. 08, 2019
8	Signal Analyzer	Agilent	N9010A	MY52220990	Feb. 21, 2019
9	Loop Ant	EMCO	6502	42960	Nov. 23, 2018
10	Horn Ant	SCHWARZBECK	BBHA 9120D	9120D-1342	Feb. 28, 2018
11	Horn Ant	Schwarzbeck	BBHA 9170	187	Dec. 05, 2019
12	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-548	Jan. 15, 2019
13	5dB Attenuator	EMCI	EMCI-N-6-05	AT-N0623	Jan. 15, 2019

Radiated Emission Measurement (For Spot check test)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Preamplifier	EMCI	EMC001340	980555	2021/4/9
2	Preamplifier	EMCI	EMC02325B	980217	2021/4/9
3	Preamplifier	EMCI	EMC012645B	980267	2021/4/9
4	Preamplifier	EMCI	EMC184045SE	980512	2021/5/31
5	Test Cable	EMCI	EMC-SM-SM-1000	180809	2021/4/9
6	Test Cable	EMCI	EMC104-SM-SM-3000	151205	2021/4/9
7	Test Cable	EMCI	EMC-SM-SM-7000	180408	2021/4/9
8	MXE EMI Receiver	Agilent	N9038A	MY554200087	2021/6/9
9	Signal Analyzer	Agilent	N9010A	MY56480554	2021/8/24
10	Loop Ant	Electro-Metrics	EMCI-LPA600	274	2021/6/15
11	Horn Ant	SCHWARZBECK	BBHA 9120D	9120D-1342	2021/6/11
12	Horn Ant	Schwarzbeck	BBHA 9170	BBHA 9170340	2021/7/8
13	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	VULB 9168-352	2021/7/23
14	5dB Attenuator	EMCI	EMCI-N-6-05	AT-N0625	2021/7/23
15	Measurement Software	EZ	EZ EMC (Version NB-03A1-01)	N/A	N/A

6dB Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	R&S/FSP30	100854	May 25, 2018

Peak Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	R&S/FSP30	100854	May 25, 2018
2	Power Meter	Anritsu	ML2495A	1128008	Aug. 16, 2018
3	Power Sensor	Anritsu	MA2411B	1126001	Aug. 16, 2018

Peak Output Power Measurement (For Spot check test)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2495A	1128008	2021/6/10
2	Power Sensor	Anritsu	MA2411B	1126001	2021/6/10

Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	R&S/FSP30	100854	May 25, 2018

Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	R&S/FSP30	100854	May 25, 2018

Remark: "N/A" denotes no model name, serial no. or calibration specified.


All calibration period of equipment list is one year.

10. EUT TEST PHOTO

Conducted Measurement Photos



Conducted Measurement Photos Desk Docking

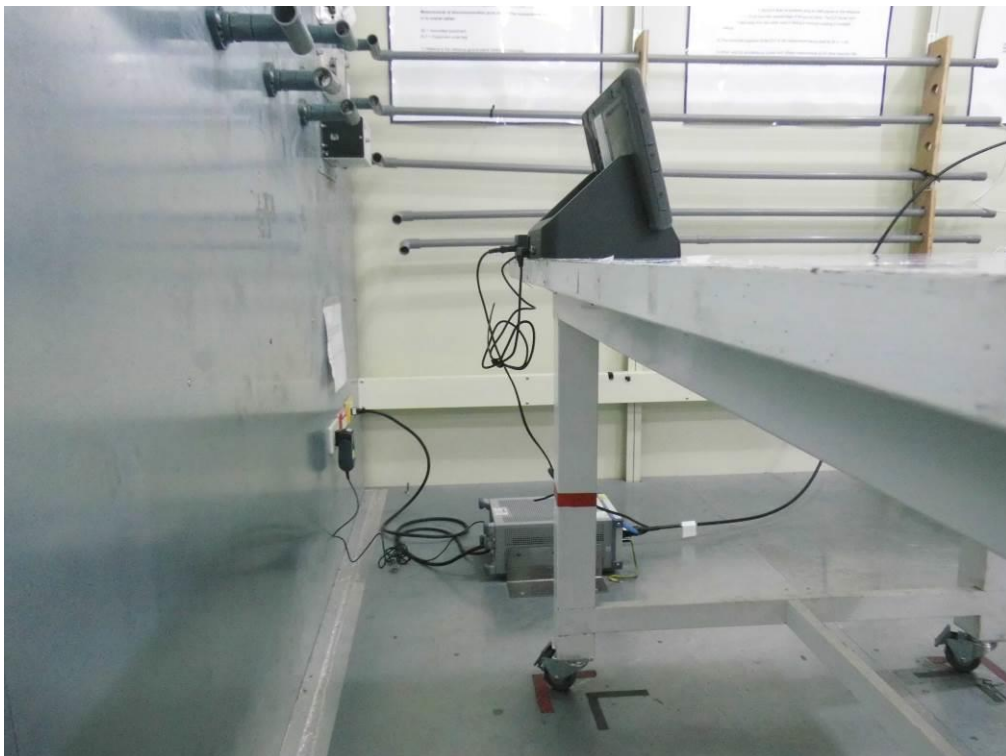


**Conducted Measurement Photos
VESA Docking**




Conducted Measurement Photos
Adapter: FSP / FSP065-DBCM1



Conducted Measurement Photos
Adapter: FSP / FSP065-DBCM1+ VESA Docking

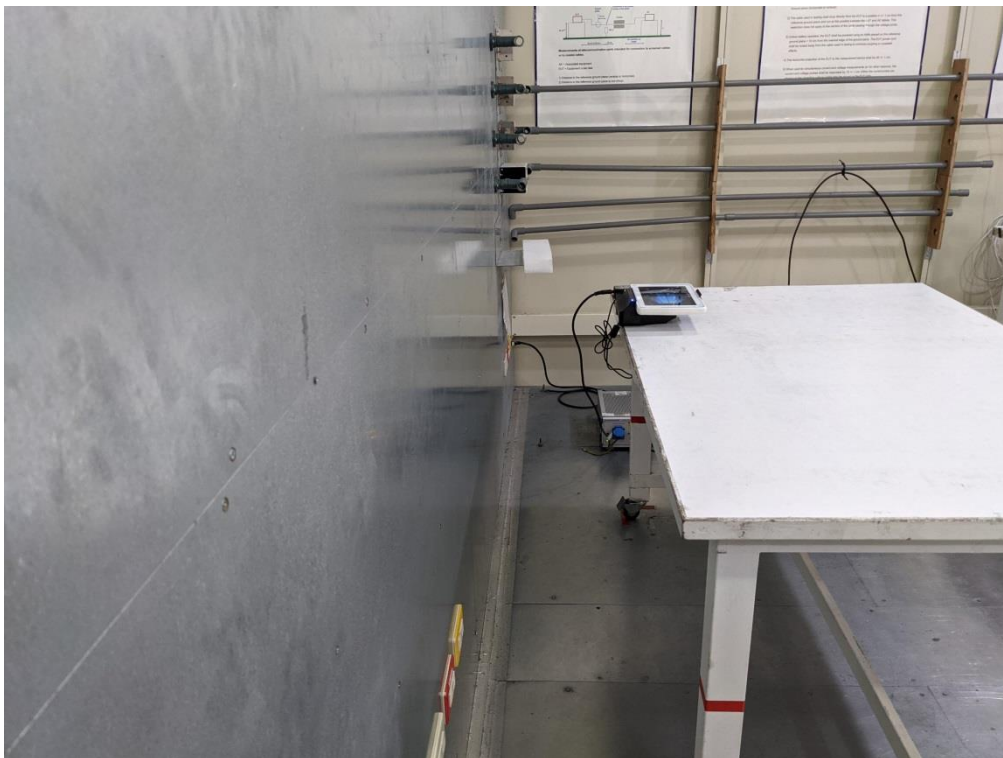


**Radiated Measurement Photos
9KHz to 30MHz**

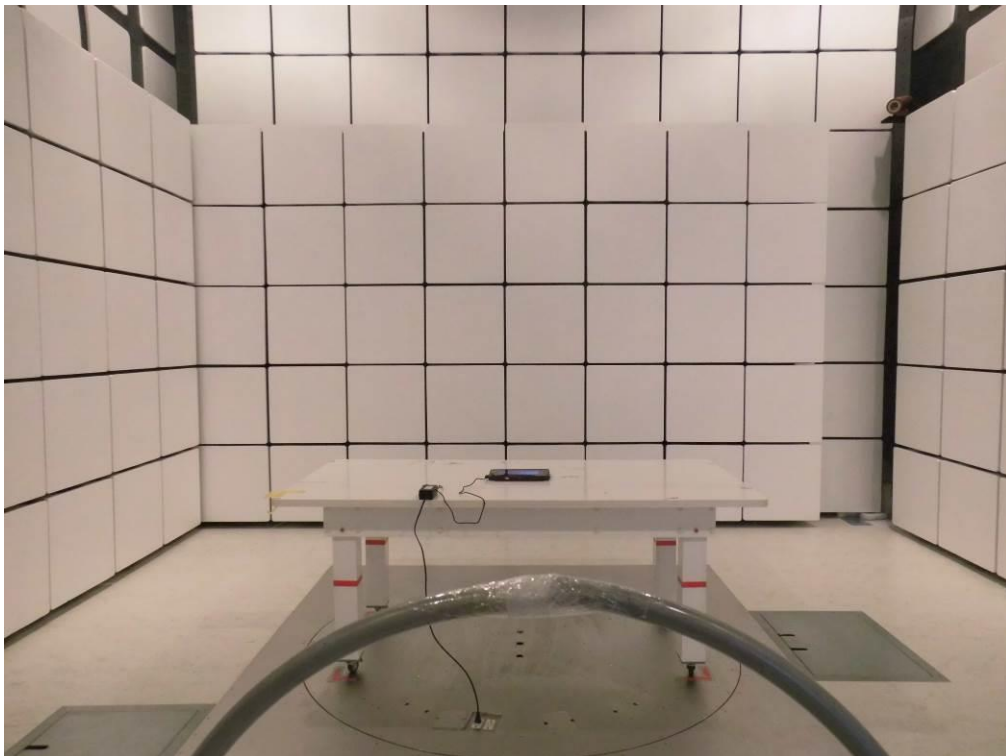


**Radiated Measurement Photos
9KHz to 30MHz**

Desk Docking

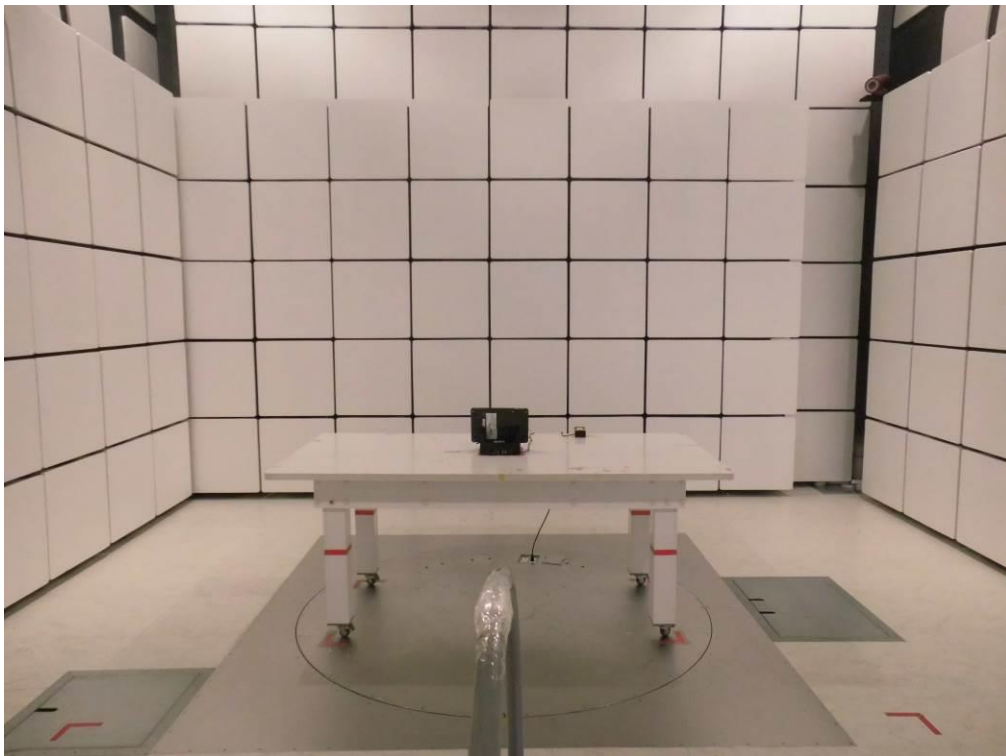


Radiated Measurement Photos 9KHz to 30MHz

VESA Docking

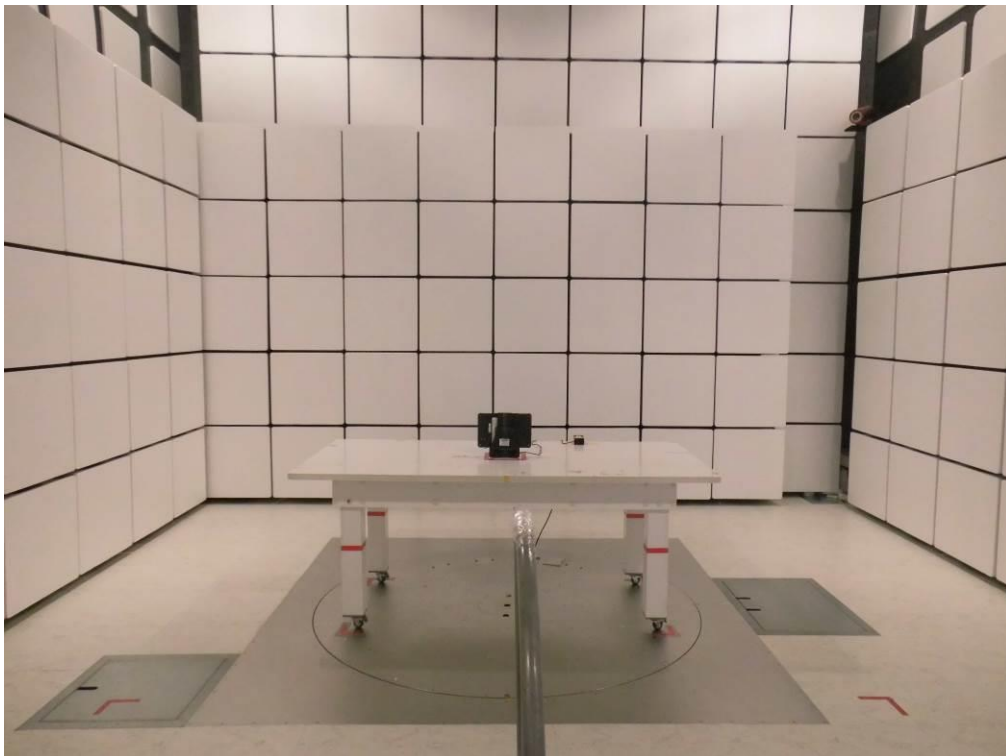


Radiated Measurement Photos Below 1GHz

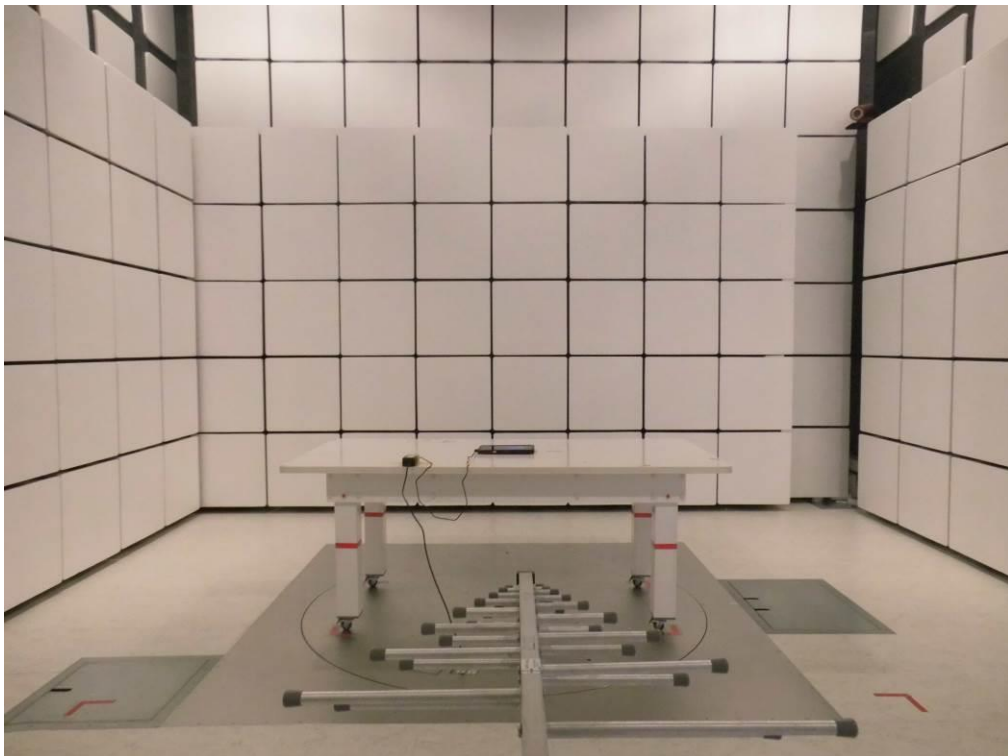



Radiated Measurement Photos Below 1GHz

Desk Docking

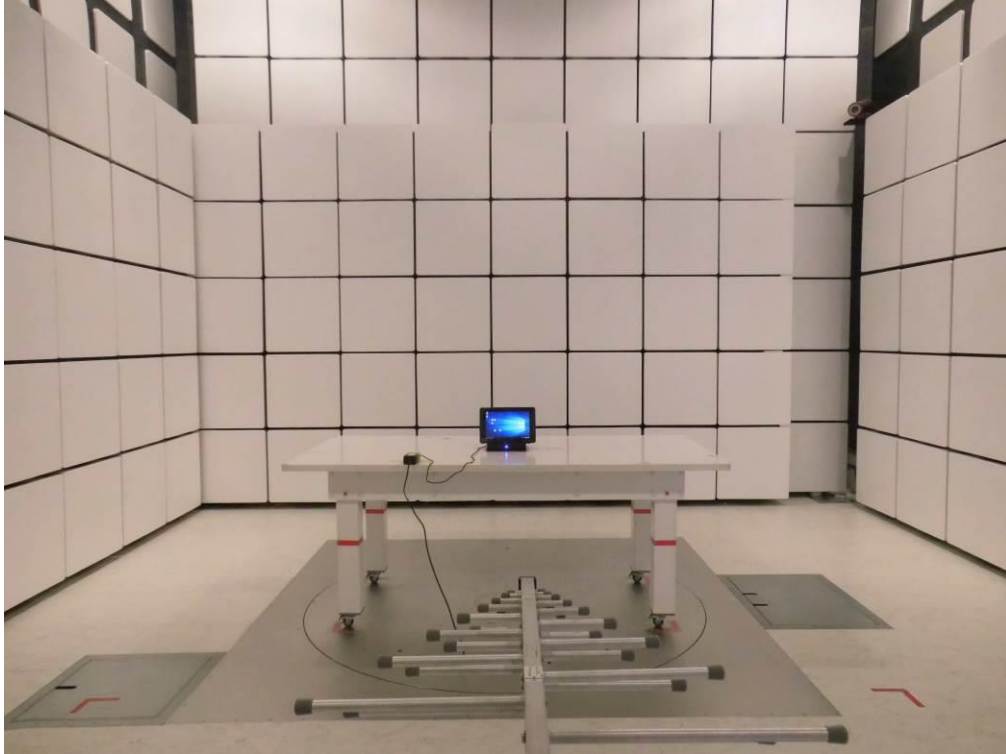

Radiated Measurement Photos Below 1GHz

VESA Docking

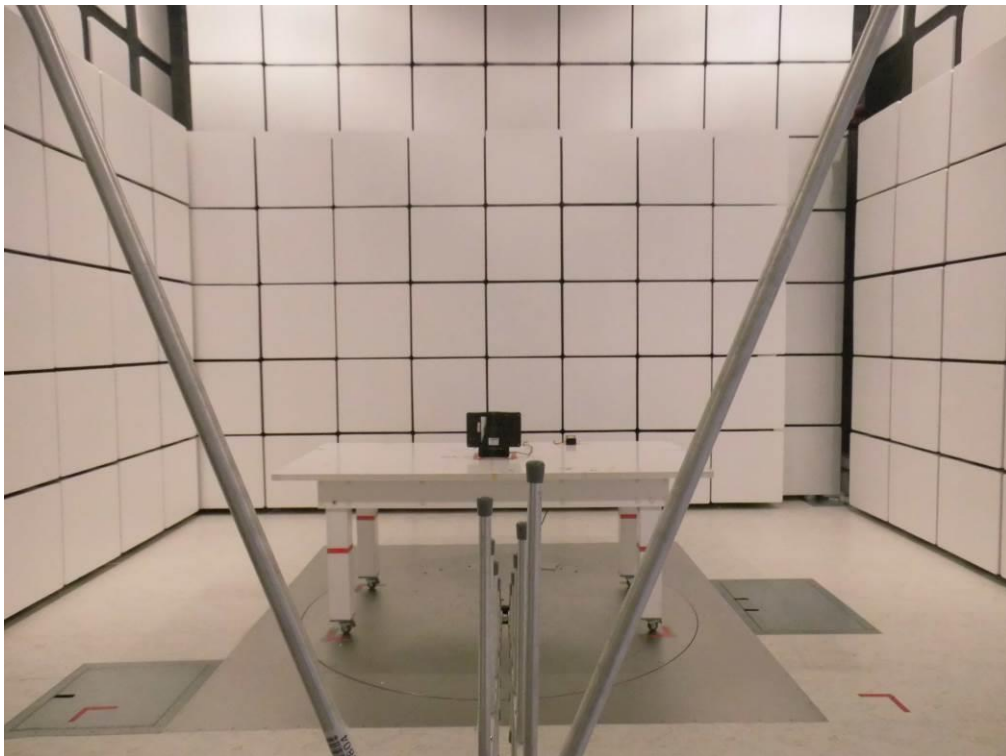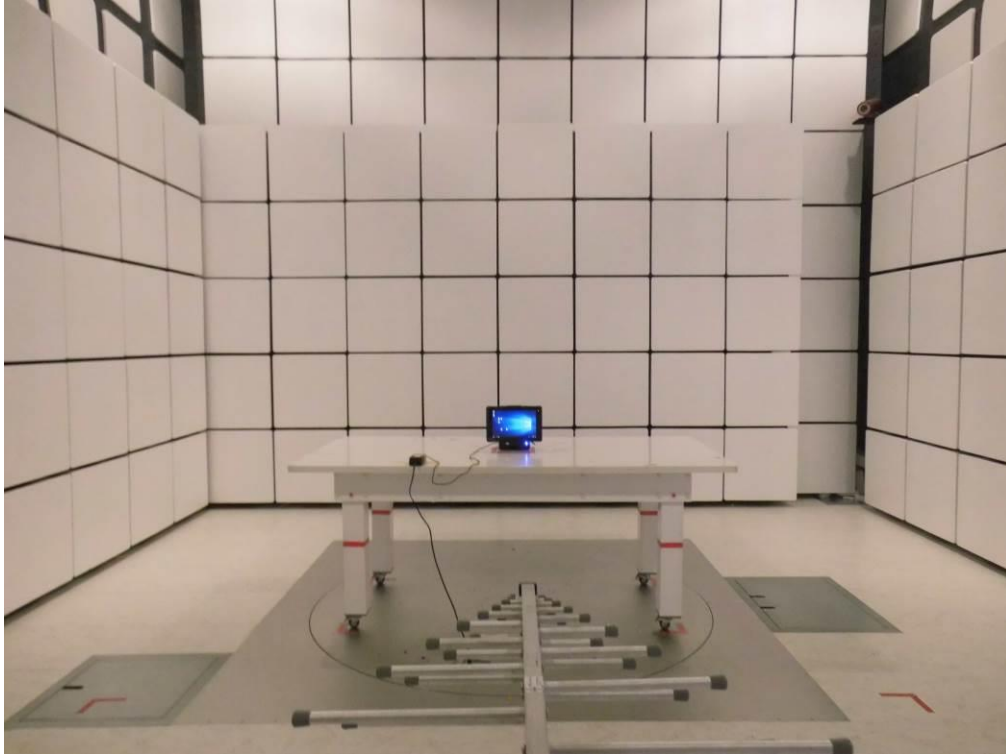



Radiated Measurement Photos Below 1GHz

Adapter: FSP / FSP065-DBCM1




Radiated Measurement Photos Below 1GHz

Adapter: FSP / FSP065-DBCM1+ VESA Docking

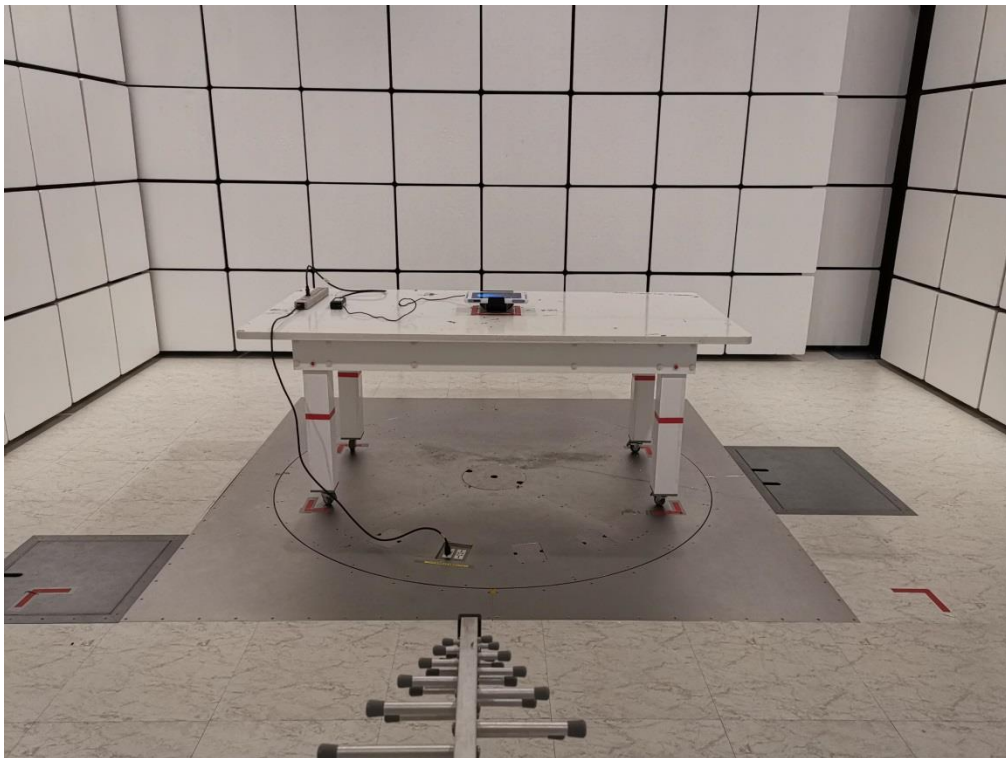
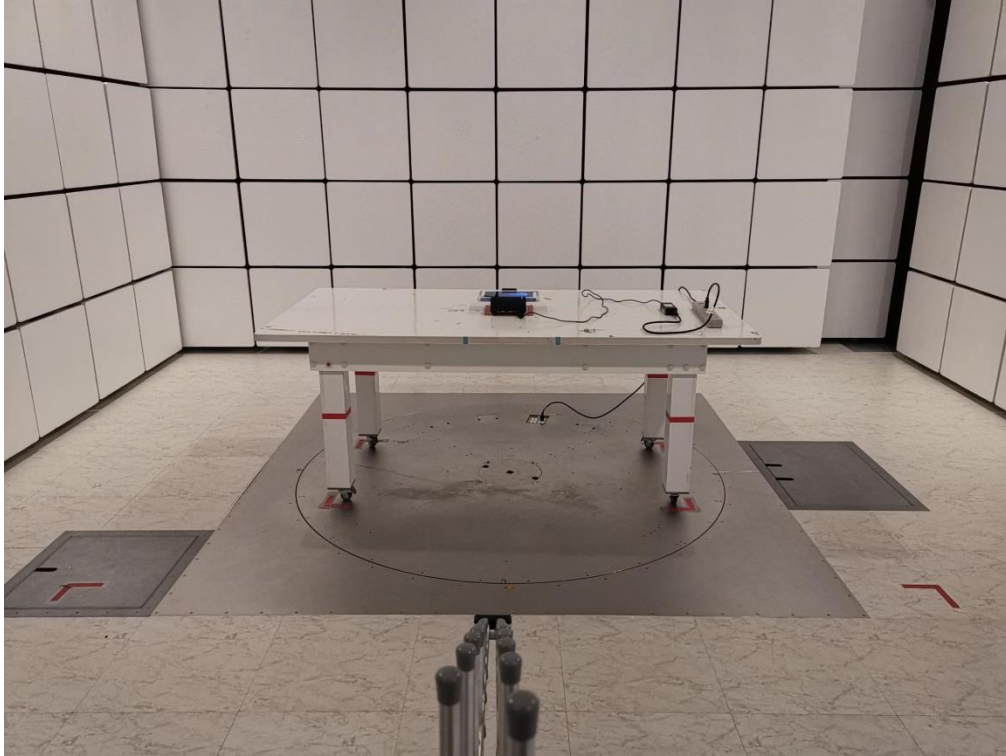


Radiated Measurement Photos Above 1GHz

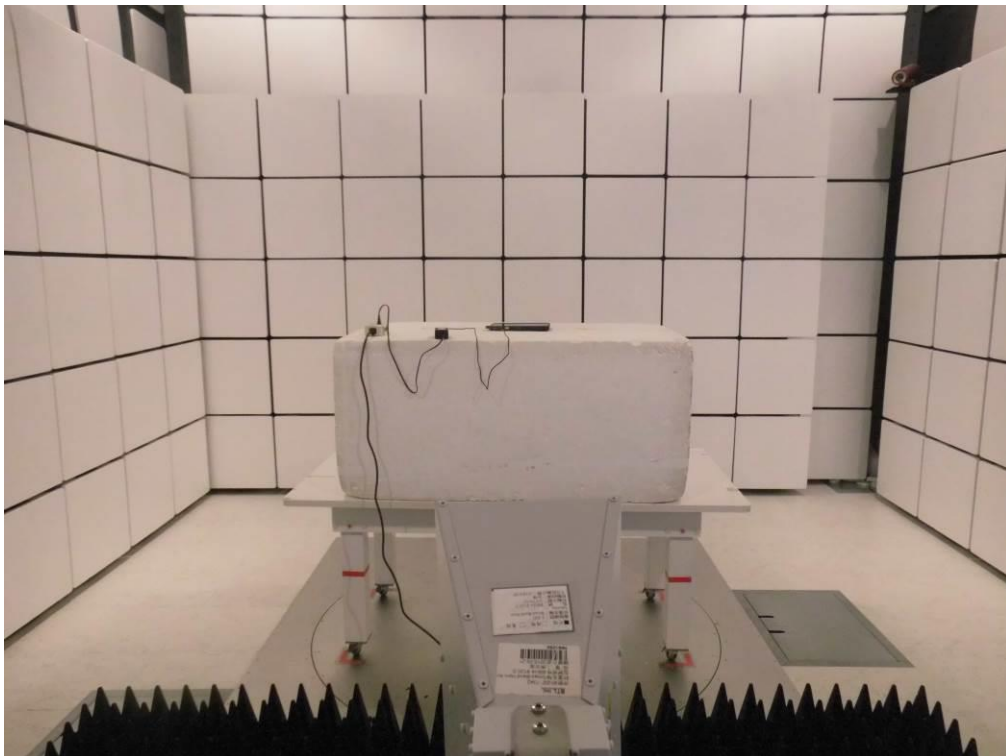

Radiated Measurement Photos Above 1GHz


Spot check test

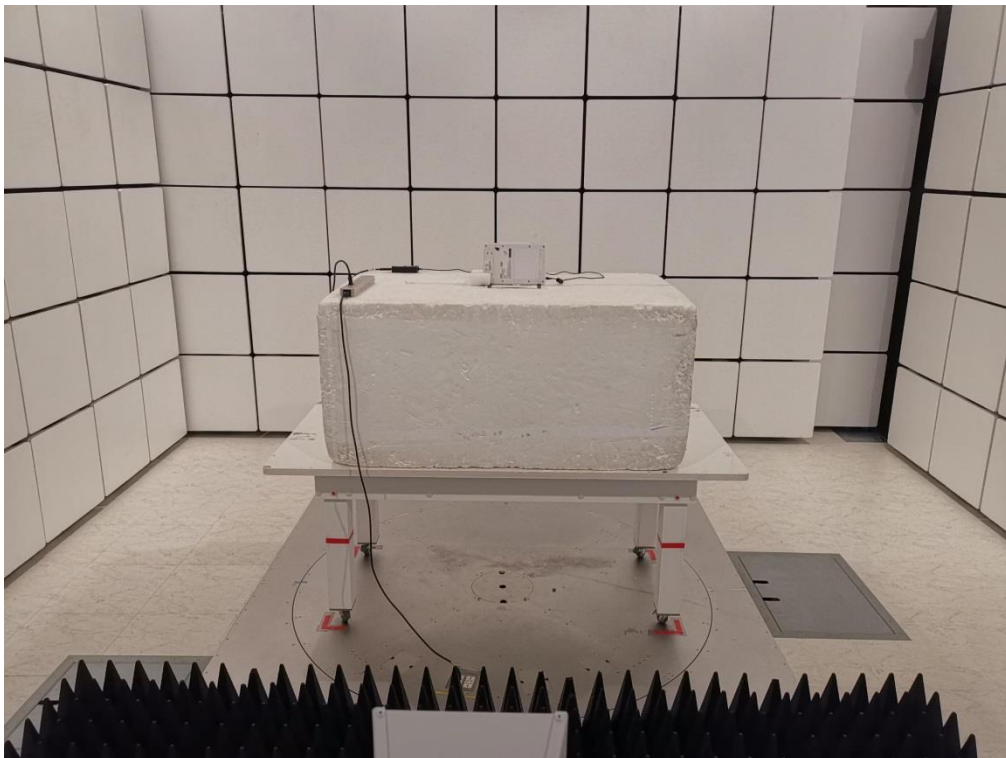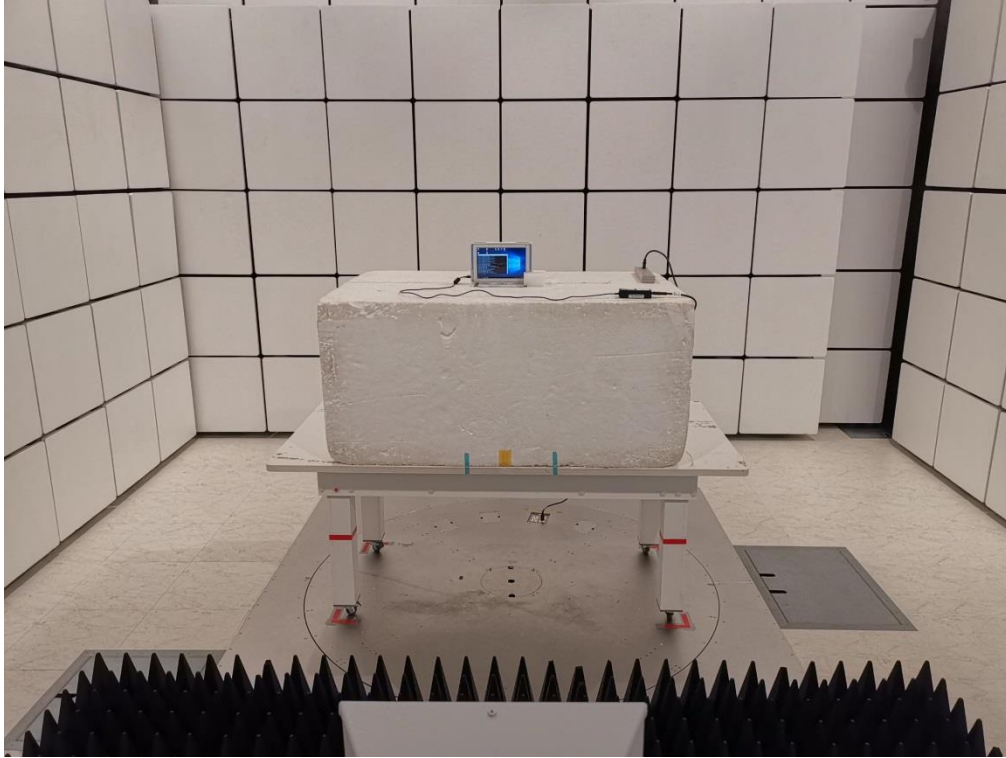

APPENDIX A - CONDUCTED EMISSION

Test Mode: TX Mode


Line

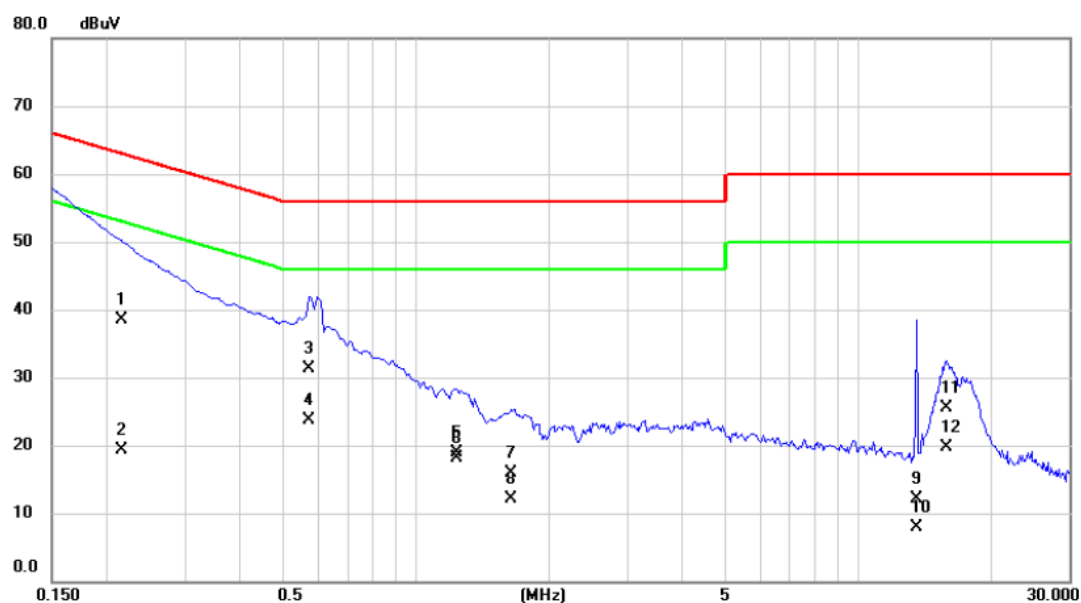

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2151	28.70	9.71	38.41	63.01	-24.60	QP	
2		0.2151	9.60	9.71	19.31	53.01	-33.70	AVG	
3		0.5720	21.50	9.74	31.24	56.00	-24.76	QP	
4	*	0.5720	14.00	9.74	23.74	46.00	-22.26	AVG	
5		1.2380	9.10	9.74	18.84	56.00	-37.16	QP	
6		1.2380	8.40	9.74	18.14	46.00	-27.86	AVG	
7		1.6430	6.10	9.76	15.86	56.00	-40.14	QP	
8		1.6430	2.30	9.76	12.06	46.00	-33.94	AVG	
9		13.5500	2.10	9.98	12.08	60.00	-47.92	QP	
10		13.5500	-2.00	9.98	7.98	50.00	-42.02	AVG	
11		15.8500	15.50	9.98	25.48	60.00	-34.52	QP	
12		15.8500	9.80	9.98	19.78	50.00	-30.22	AVG	

Test Mode: TX Mode


Neutral

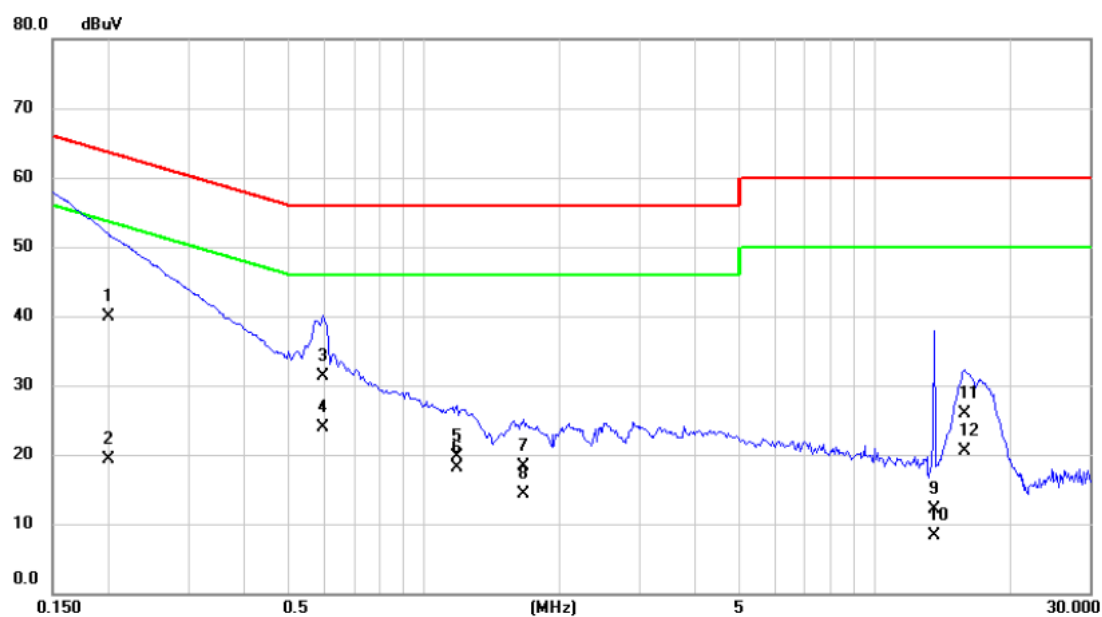

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1990	30.30	9.65	39.95	63.65	-23.70	QP	
2		0.1990	9.60	9.65	19.25	53.65	-34.40	AVG	
3		0.5990	21.70	9.68	31.38	56.00	-24.62	QP	
4	*	0.5990	14.30	9.68	23.98	46.00	-22.02	AVG	
5		1.1840	10.00	9.69	19.69	56.00	-36.31	QP	
6		1.1840	8.50	9.69	18.19	46.00	-27.81	AVG	
7		1.6610	8.50	9.71	18.21	56.00	-37.79	QP	
8		1.6610	4.60	9.71	14.31	46.00	-31.69	AVG	
9		13.5500	2.10	9.98	12.08	60.00	-47.92	QP	
10		13.5500	-1.70	9.98	8.28	50.00	-41.72	AVG	
11		15.8500	15.90	9.99	25.89	60.00	-34.11	QP	
12		15.8500	10.50	9.99	20.49	50.00	-29.51	AVG	

Test Mode: TX Mode_Desk Docking


Line

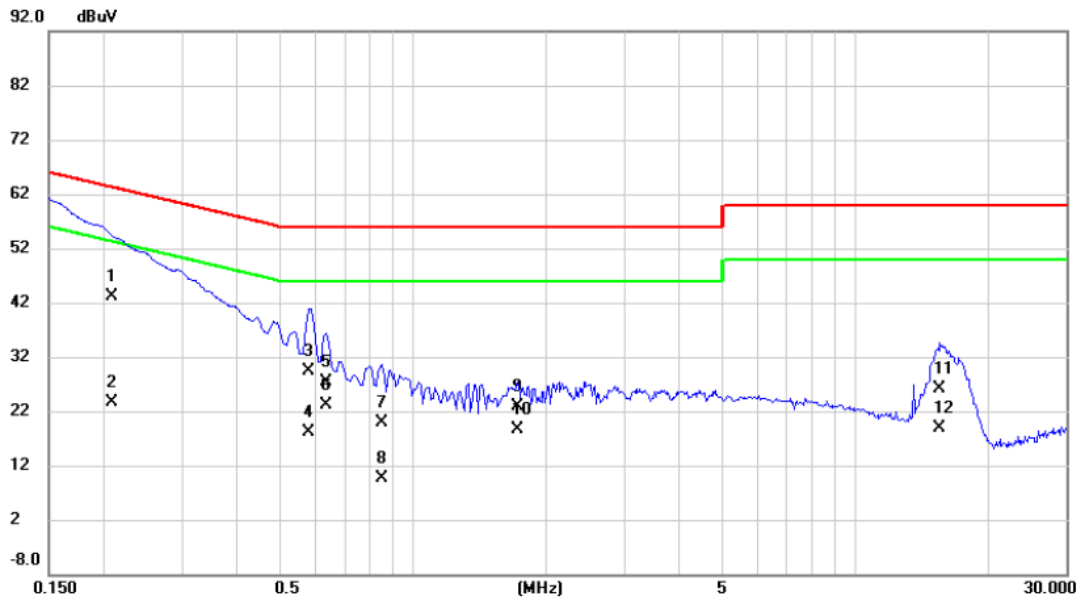

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.2088	33.40	9.71	43.11	63.25	-20.14	QP	
2		0.2088	14.00	9.71	23.71	53.25	-29.54	AVG	
3		0.5810	19.60	9.74	29.34	56.00	-26.66	QP	
4		0.5810	8.30	9.74	18.04	46.00	-27.96	AVG	
5		0.6350	17.70	9.74	27.44	56.00	-28.56	QP	
6		0.6350	13.40	9.74	23.14	46.00	-22.86	AVG	
7		0.8510	10.10	9.74	19.84	56.00	-36.16	QP	
8		0.8510	-0.10	9.74	9.64	46.00	-36.36	AVG	
9		1.7240	13.20	9.76	22.96	56.00	-33.04	QP	
10		1.7240	8.80	9.76	18.56	46.00	-27.44	AVG	
11		15.5500	16.20	9.98	26.18	60.00	-33.82	QP	
12		15.5500	9.00	9.98	18.98	50.00	-31.02	AVG	

Test Mode: TX Mode_Desk Docking


Neutral

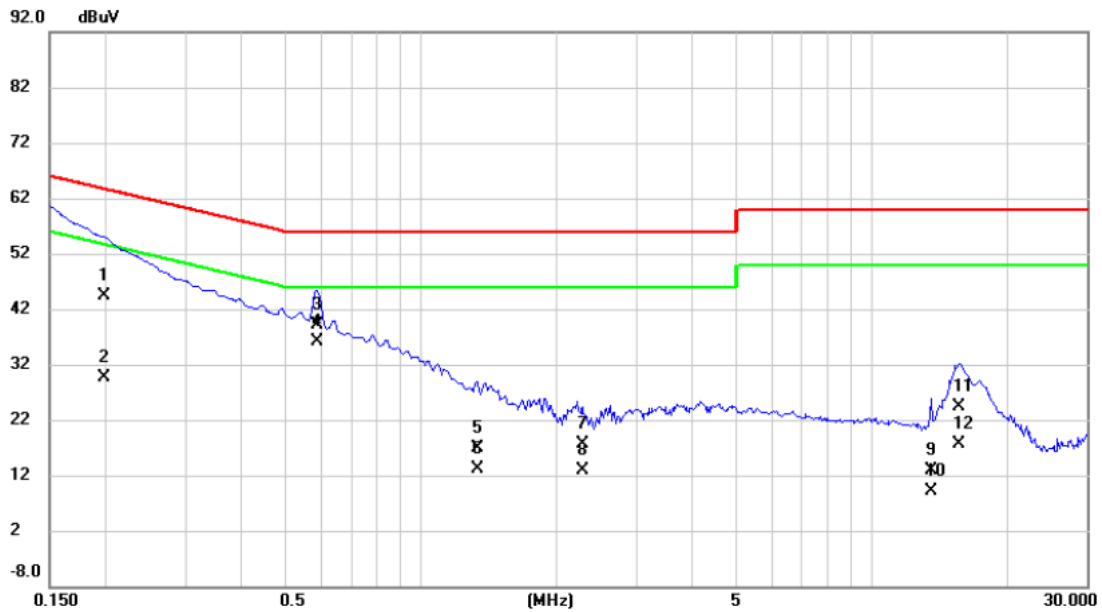

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1976	34.70	9.65	44.35	63.71	-19.36	QP	
2		0.1976	20.10	9.65	29.75	53.71	-23.96	AVG	
3		0.5900	29.50	9.68	39.18	56.00	-16.82	QP	
4	*	0.5900	26.50	9.68	36.18	46.00	-9.82	AVG	
5		1.3370	7.10	9.69	16.79	56.00	-39.21	QP	
6		1.3370	3.50	9.69	13.19	46.00	-32.81	AVG	
7		2.2820	8.00	9.72	17.72	56.00	-38.28	QP	
8		2.2820	3.10	9.72	12.82	46.00	-33.18	AVG	
9		13.5500	3.00	9.98	12.98	60.00	-47.02	QP	
10		13.5500	-0.90	9.98	9.08	50.00	-40.92	AVG	
11		15.6500	14.50	9.99	24.49	60.00	-35.51	QP	
12		15.6500	7.70	9.99	17.69	50.00	-32.31	AVG	

Test Mode: TX Mode_VESA Docking


Line

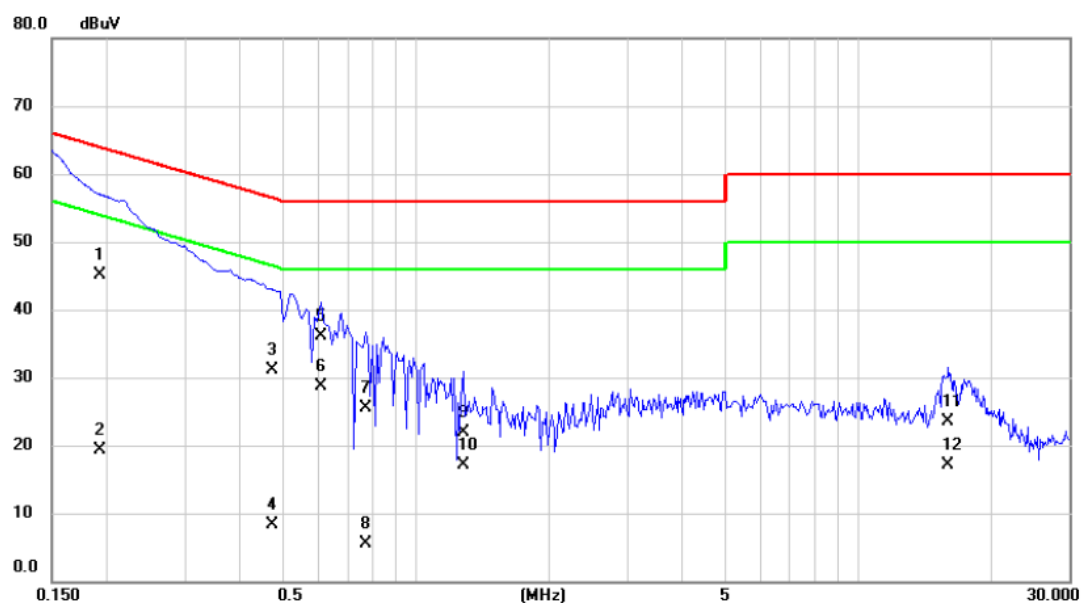

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1934	35.40	9.71	45.11	63.89	-18.78	QP	
2		0.1934	9.60	9.71	19.31	53.89	-34.58	AVG	
3		0.4713	21.40	9.74	31.14	56.49	-25.35	QP	
4		0.4713	-1.50	9.74	8.24	46.49	-38.25	AVG	
5		0.6080	26.40	9.74	36.14	56.00	-19.86	QP	
6	*	0.6080	18.90	9.74	28.64	46.00	-17.36	AVG	
7		0.7700	15.80	9.74	25.54	56.00	-30.46	QP	
8		0.7700	-4.30	9.74	5.44	46.00	-40.56	AVG	
9		1.2830	12.20	9.75	21.95	56.00	-34.05	QP	
10		1.2830	7.40	9.75	17.15	46.00	-28.85	AVG	
11		15.9500	13.60	9.98	23.58	60.00	-36.42	QP	
12		15.9500	7.10	9.98	17.08	50.00	-32.92	AVG	

Test Mode: TX Mode_VESA Docking


Neutral

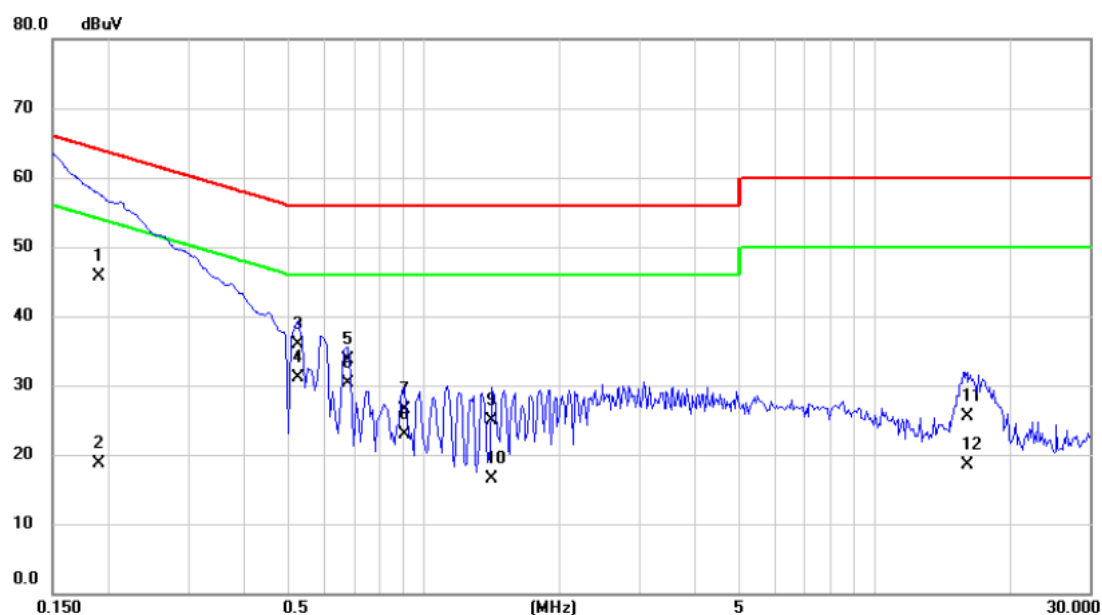

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1900	36.10	9.65	45.75	64.04	-18.29	QP	
2		0.1900	9.10	9.65	18.75	54.04	-35.29	AVG	
3		0.5270	26.30	9.68	35.98	56.00	-20.02	QP	
4	*	0.5270	21.50	9.68	31.18	46.00	-14.82	AVG	
5		0.6800	24.00	9.68	33.68	56.00	-22.32	QP	
6		0.6800	20.60	9.68	30.28	46.00	-15.72	AVG	
7		0.9050	16.80	9.69	26.49	56.00	-29.51	QP	
8		0.9050	13.30	9.69	22.99	46.00	-23.01	AVG	
9		1.4180	15.20	9.69	24.89	56.00	-31.11	QP	
10		1.4180	6.90	9.69	16.59	46.00	-29.41	AVG	
11		16.0000	15.60	9.99	25.59	60.00	-34.41	QP	
12		16.0000	8.50	9.99	18.49	50.00	-31.51	AVG	

Test Mode: Normal Mode _ Adapter: FSP / FSP065-DBCM1


Line

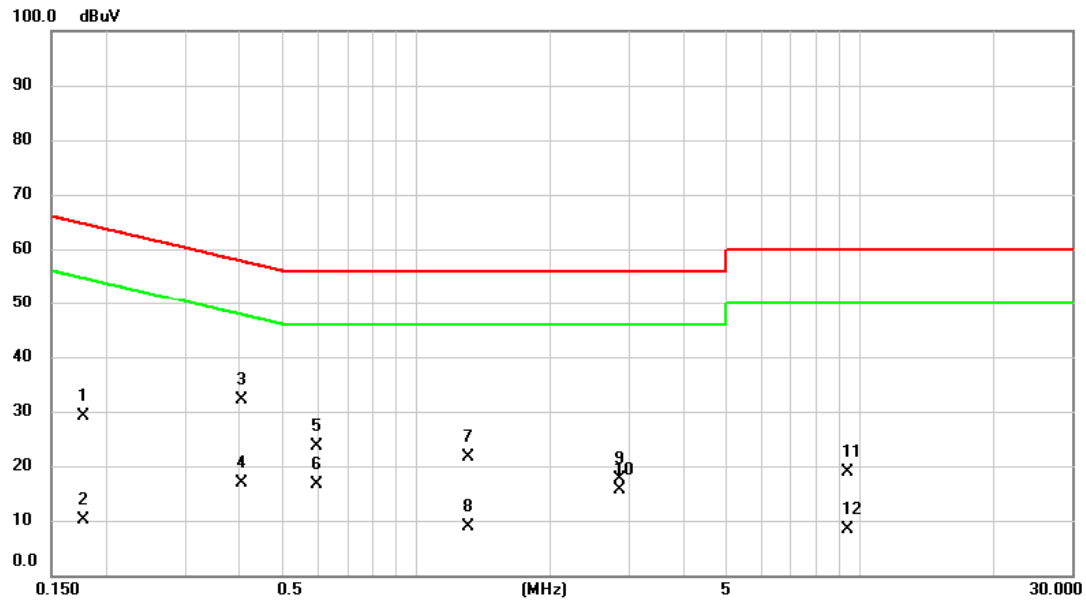

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector Comment
1		0.1777	19.49	9.67	29.16	64.59	-35.43	QP
2		0.1777	0.39	9.67	10.06	54.59	-44.53	AVG
3	*	0.4042	22.57	9.68	32.25	57.77	-25.52	QP
4		0.4042	7.30	9.68	16.98	47.77	-30.79	AVG
5		0.5955	13.98	9.68	23.66	56.00	-32.34	QP
6		0.5955	7.02	9.68	16.70	46.00	-29.30	AVG
7		1.3088	11.90	9.70	21.60	56.00	-34.40	QP
8		1.3088	-0.77	9.70	8.93	46.00	-37.07	AVG
9		2.8568	7.99	9.76	17.75	56.00	-38.25	QP
10		2.8568	5.89	9.76	15.65	46.00	-30.35	AVG
11		9.3863	8.92	9.92	18.84	60.00	-41.16	QP
12		9.3863	-1.57	9.92	8.35	50.00	-41.65	AVG

Test Mode: Normal Mode_Adapter: FSP / FSP065-DBCM1


Neutral

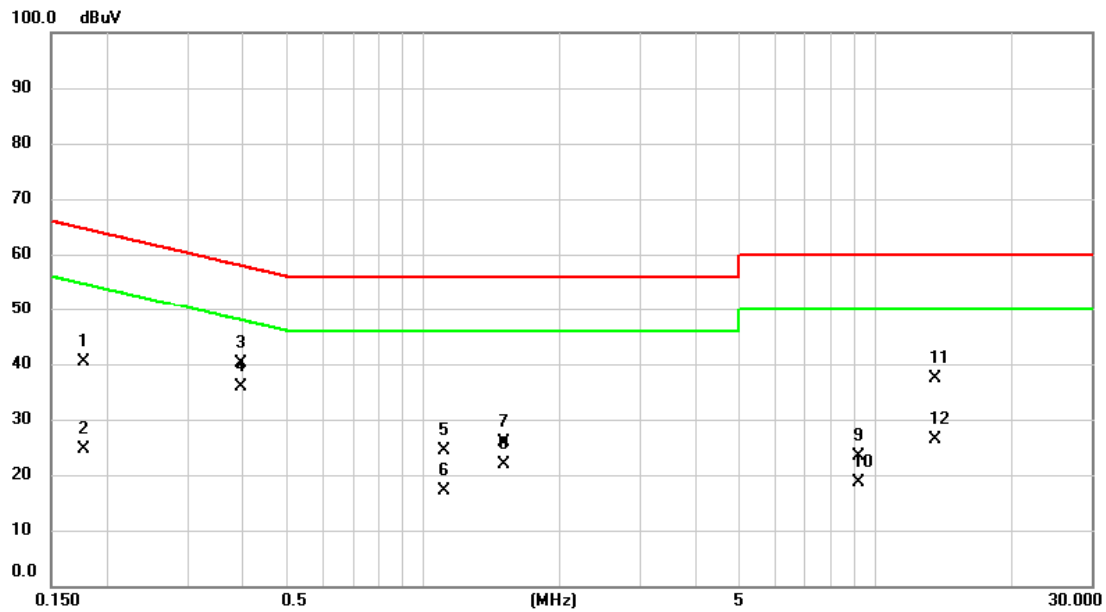

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1770	30.77	9.67	40.44	64.63	-24.19	QP	
2		0.1770	15.02	9.67	24.69	54.63	-29.94	AVG	
3		0.3952	30.47	9.68	40.15	57.95	-17.80	QP	
4	*	0.3952	26.24	9.68	35.92	47.95	-12.03	AVG	
5		1.1130	14.64	9.69	24.33	56.00	-31.67	QP	
6		1.1130	7.38	9.69	17.07	46.00	-28.93	AVG	
7		1.5045	16.05	9.72	25.77	56.00	-30.23	QP	
8		1.5045	12.09	9.72	21.81	46.00	-24.19	AVG	
9		9.2063	13.54	9.91	23.45	60.00	-36.55	QP	
10		9.2063	8.72	9.91	18.63	50.00	-31.37	AVG	
11		13.5600	27.33	9.94	37.27	60.00	-22.73	QP	
12		13.5600	16.51	9.94	26.45	50.00	-23.55	AVG	

Test Mode: Idle Mode _ Adapter: FSP / FSP065-DBCM1


Line

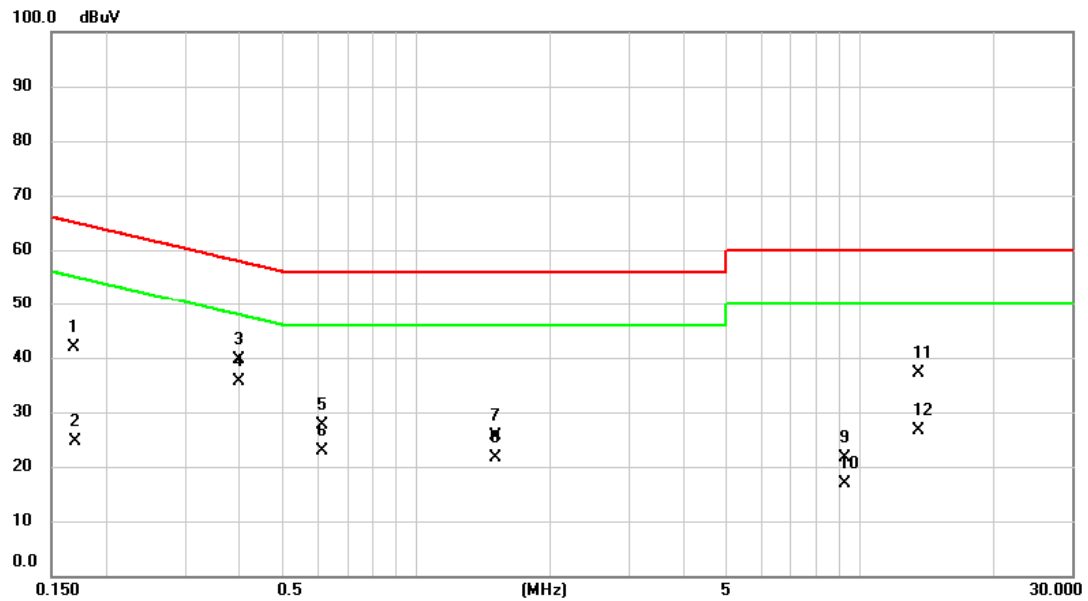

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1685	32.11	9.68	41.79	65.03	-23.24	QP	
2		0.1703	14.96	9.68	24.64	54.95	-30.31	AVG	
3		0.3997	30.03	9.68	39.71	57.86	-18.15	QP	
4	*	0.3997	26.02	9.68	35.70	47.86	-12.16	AVG	
5		0.6134	18.03	9.68	27.71	56.00	-28.29	QP	
6		0.6134	13.12	9.68	22.80	46.00	-23.20	AVG	
7		1.5023	15.95	9.72	25.67	56.00	-30.33	QP	
8		1.5023	11.99	9.72	21.71	46.00	-24.29	AVG	
9		9.2220	11.83	9.91	21.74	60.00	-38.26	QP	
10		9.2220	7.07	9.91	16.98	50.00	-33.02	AVG	
11		13.5600	27.10	9.94	37.04	60.00	-22.96	QP	
12		13.5600	16.60	9.94	26.54	50.00	-23.46	AVG	

Test Mode: Idle Mode _ Adapter: FSP / FSP065-DBCM1


Neutral

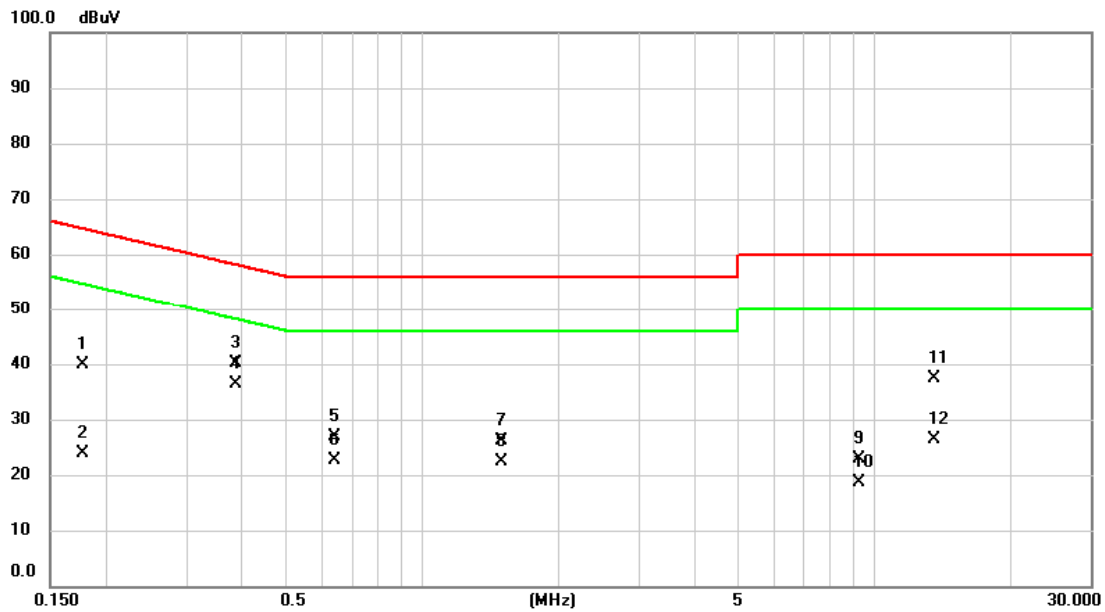

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1770	30.16	9.67	39.83	64.63	-24.80	QP	
2		0.1770	14.31	9.67	23.98	54.63	-30.65	AVG	
3		0.3885	30.51	9.68	40.19	58.10	-17.91	QP	
4	*	0.3885	26.76	9.68	36.44	48.10	-11.66	AVG	
5		0.6405	17.25	9.68	26.93	56.00	-29.07	QP	
6		0.6405	12.96	9.68	22.64	46.00	-23.36	AVG	
7		1.4933	16.43	9.71	26.14	56.00	-29.86	QP	
8		1.4933	12.78	9.71	22.49	46.00	-23.51	AVG	
9		9.2288	12.98	9.91	22.89	60.00	-37.11	QP	
10		9.2288	8.79	9.91	18.70	50.00	-31.30	AVG	
11		13.5600	27.50	9.94	37.44	60.00	-22.56	QP	
12		13.5600	16.45	9.94	26.39	50.00	-23.61	AVG	

Test Mode: Normal Mode _ Adapter: FSP / FSP065-DBCM1+ VESA Docking


Line

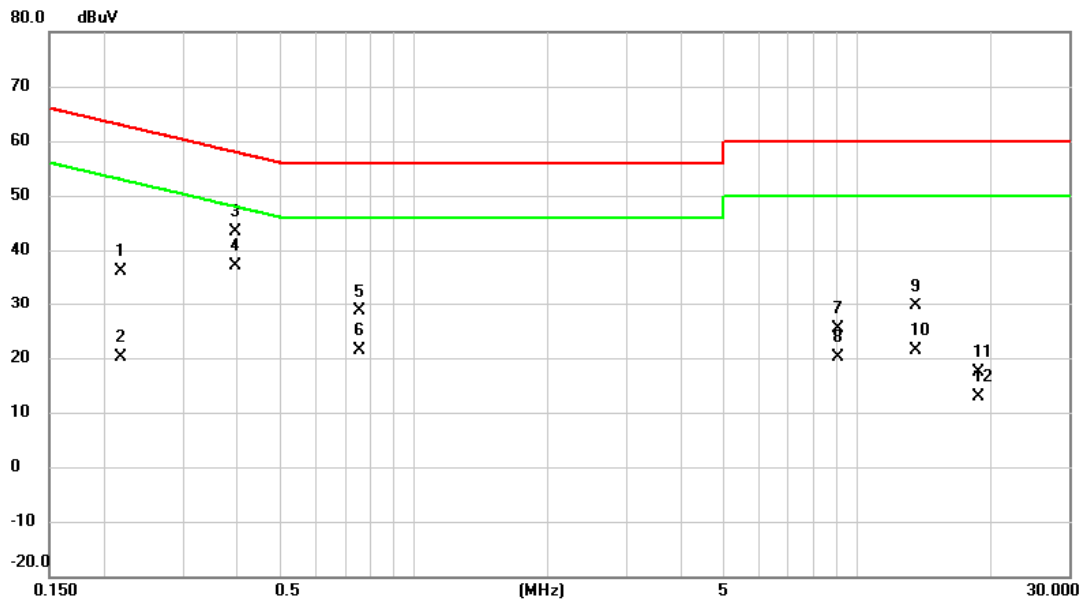

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.2175	26.56	9.67	36.23	62.91	-26.68	QP	
2		0.2175	10.52	9.67	20.19	52.91	-32.72	AVG	
3		0.3952	33.70	9.68	43.38	57.95	-14.57	QP	
4	*	0.3952	27.45	9.68	37.13	47.95	-10.82	AVG	
5		0.7552	18.90	9.69	28.59	56.00	-27.41	QP	
6		0.7552	11.78	9.69	21.47	46.00	-24.53	AVG	
7		9.0780	15.45	9.91	25.36	60.00	-34.64	QP	
8		9.0780	10.13	9.91	20.04	50.00	-29.96	AVG	
9		13.5600	19.63	9.94	29.57	60.00	-30.43	QP	
10		13.5600	11.36	9.94	21.30	50.00	-28.70	AVG	
11		18.7148	7.44	9.96	17.40	60.00	-42.60	QP	
12		18.7148	2.94	9.96	12.90	50.00	-37.10	AVG	

Test Mode: Normal Mode_Adapter: FSP / FSP065-DBCM1+ VESA Docking


Neutral

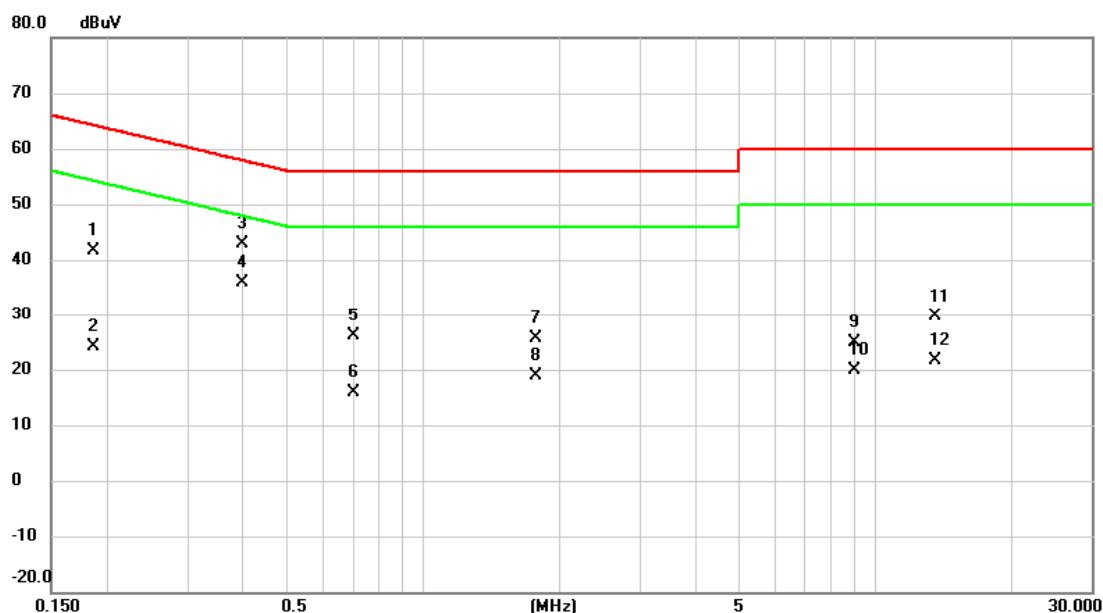

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1864	32.00	9.67	41.67	64.20	-22.53	QP	
2		0.1864	14.42	9.67	24.09	54.20	-30.11	AVG	
3		0.3997	33.27	9.68	42.95	57.86	-14.91	QP	
4	*	0.3997	26.16	9.68	35.84	47.86	-12.02	AVG	
5		0.7012	16.38	9.68	26.06	56.00	-29.94	QP	
6		0.7012	6.16	9.68	15.84	46.00	-30.16	AVG	
7		1.7655	16.02	9.73	25.75	56.00	-30.25	QP	
8		1.7655	9.25	9.73	18.98	46.00	-27.02	AVG	
9		9.0218	14.88	9.91	24.79	60.00	-35.21	QP	
10		9.0218	9.93	9.91	19.84	50.00	-30.16	AVG	
11		13.5600	19.59	9.94	29.53	60.00	-30.47	QP	
12		13.5600	11.73	9.94	21.67	50.00	-28.33	AVG	

Test Mode: Idle Mode _ Adapter: FSP / FSP065-DBCM1+ VESA Docking


Line

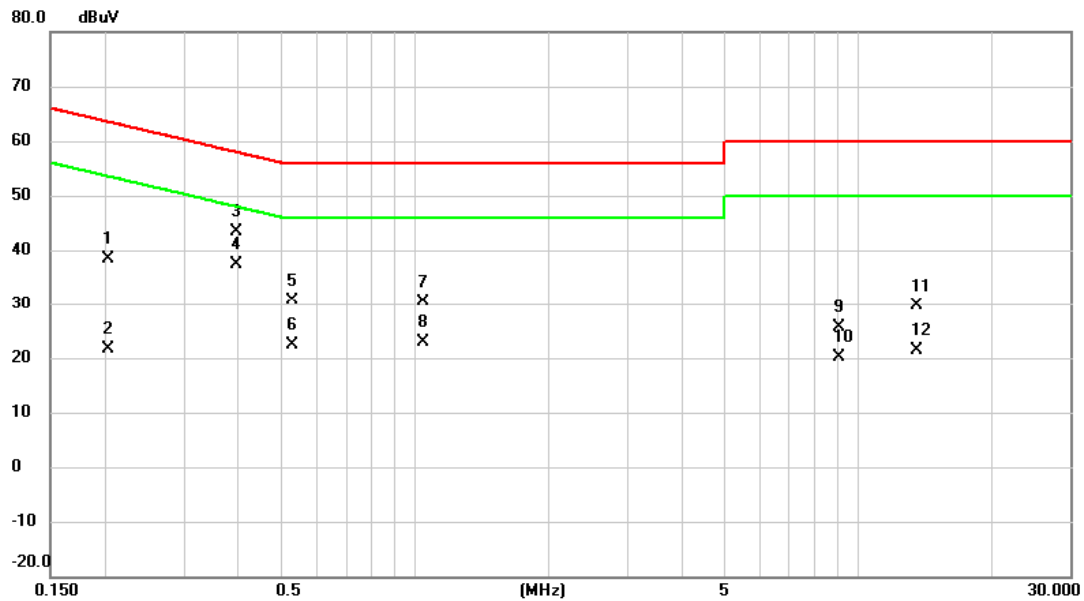

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.2030	28.65	9.67	38.32	63.49	-25.17	QP	
2		0.2030	11.95	9.67	21.62	53.49	-31.87	AVG	
3		0.3952	33.60	9.68	43.28	57.95	-14.67	QP	
4	*	0.3952	27.73	9.68	37.41	47.95	-10.54	AVG	
5		0.5280	20.85	9.68	30.53	56.00	-25.47	QP	
6		0.5280	12.71	9.68	22.39	46.00	-23.61	AVG	
7		1.0455	20.58	9.69	30.27	56.00	-25.73	QP	
8		1.0455	13.31	9.69	23.00	46.00	-23.00	AVG	
9		9.0375	15.70	9.91	25.61	60.00	-34.39	QP	
10		9.0375	10.12	9.91	20.03	50.00	-29.97	AVG	
11		13.5600	19.65	9.94	29.59	60.00	-30.41	QP	
12		13.5600	11.41	9.94	21.35	50.00	-28.65	AVG	

Test Mode: Idle Mode _ Adapter: FSP / FSP065-DBCM1+ VESA Docking

Neutral

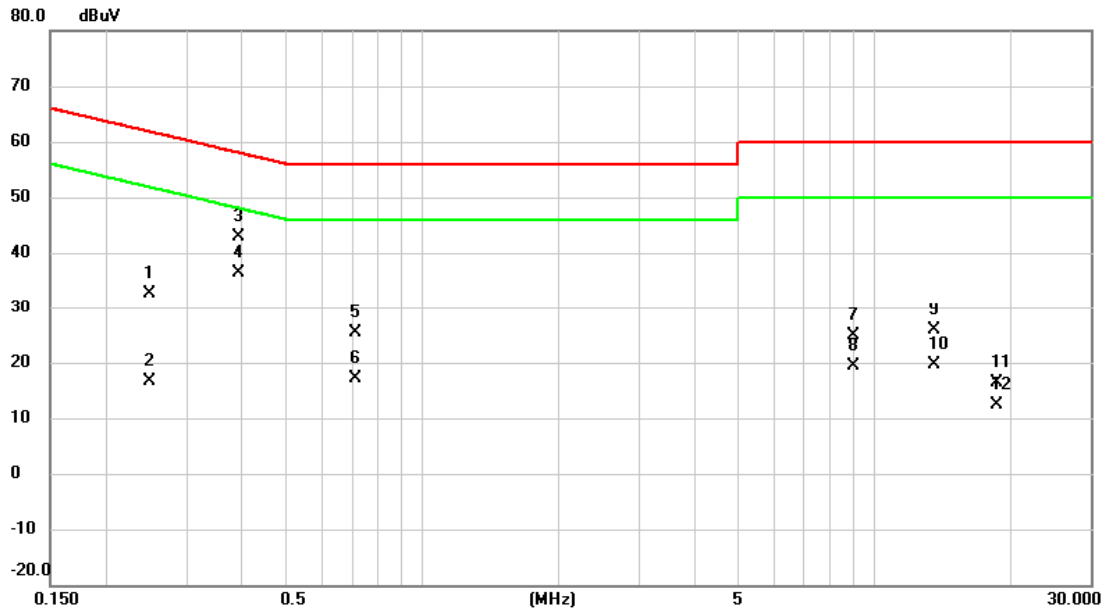


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2490	23.07	9.68	32.75	61.79	-29.04	QP	
2		0.2490	6.94	9.68	16.62	51.79	-35.17	AVG	
3		0.3930	33.08	9.68	42.76	58.00	-15.24	QP	
4	*	0.3930	26.62	9.68	36.30	48.00	-11.70	AVG	
5		0.7147	15.80	9.68	25.48	56.00	-30.52	QP	
6		0.7147	7.43	9.68	17.11	46.00	-28.89	AVG	
7		9.0262	14.86	9.91	24.77	60.00	-35.23	QP	
8		9.0262	9.58	9.91	19.49	50.00	-30.51	AVG	
9		13.5600	15.83	9.94	25.77	60.00	-34.23	QP	
10		13.5600	9.62	9.94	19.56	50.00	-30.44	AVG	
11		18.6743	6.50	9.96	16.46	60.00	-43.54	QP	
12		18.6743	2.52	9.96	12.48	50.00	-37.52	AVG	

APPENDIX B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode:	TX Mode
------------	---------


Ant 0°

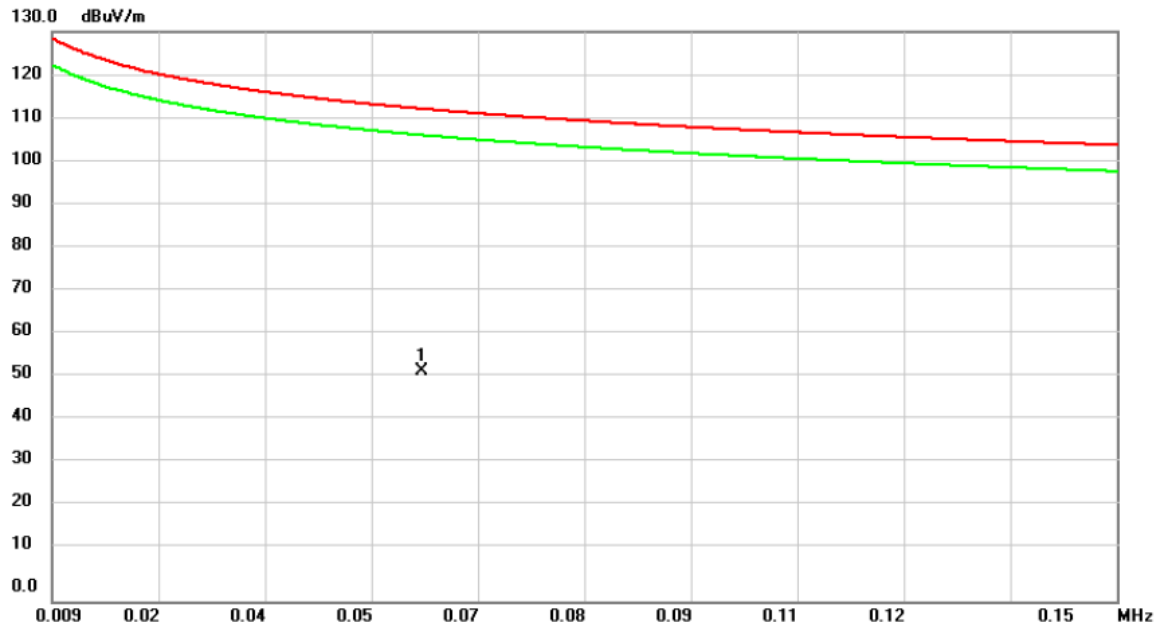

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	0.0580	39.60	12.86	52.46	112.34	-59.88	peak

Test Mode: TX Mode


Ant 0°

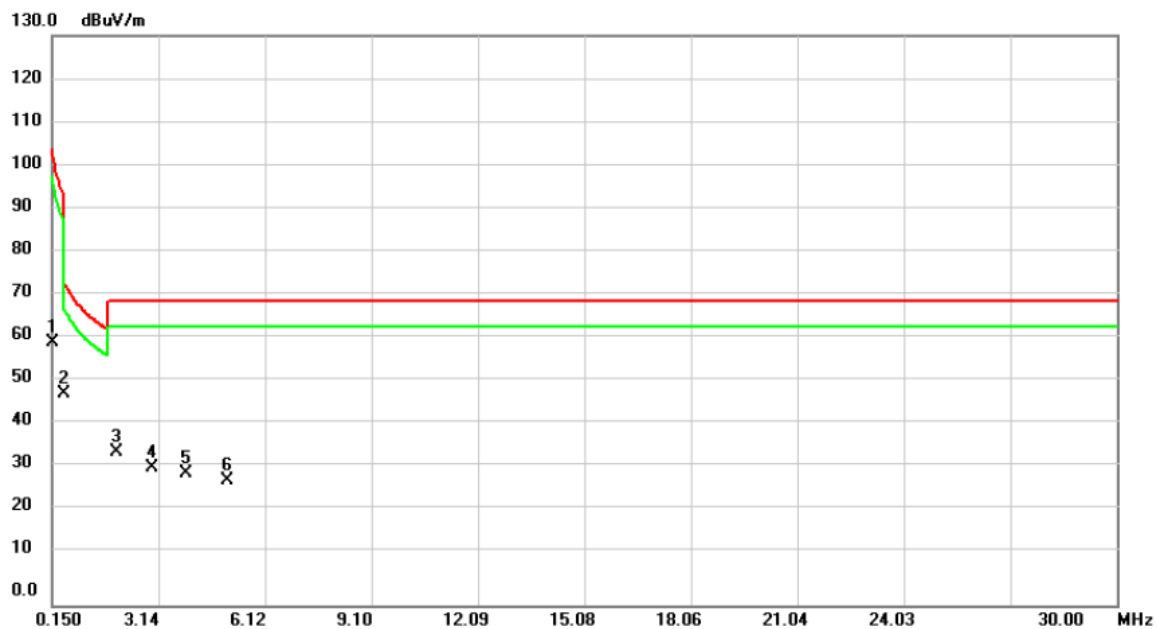

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.1500	47.93	12.03	59.96	104.08	-44.12	peak	
2	*	0.5080	36.55	11.80	48.35	73.49	-25.14	peak	
3		1.9410	23.39	11.58	34.97	69.54	-34.57	peak	
4		2.9560	20.15	11.12	31.27	69.54	-38.27	peak	
5		3.9110	18.67	11.24	29.91	69.54	-39.63	peak	
6		5.0750	16.98	11.40	28.38	69.54	-41.16	peak	

Test Mode: TX Mode


Ant 90°

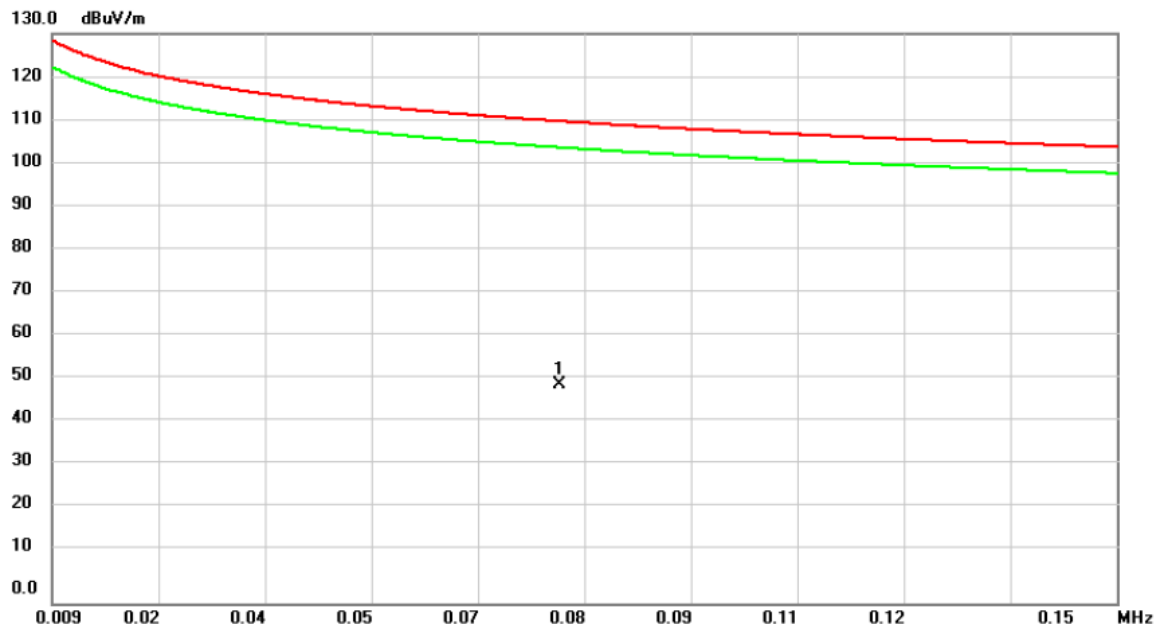

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	0.0763	37.36	12.53	49.89	109.95	-60.06	peak

Test Mode: TX Mode


Ant 90°

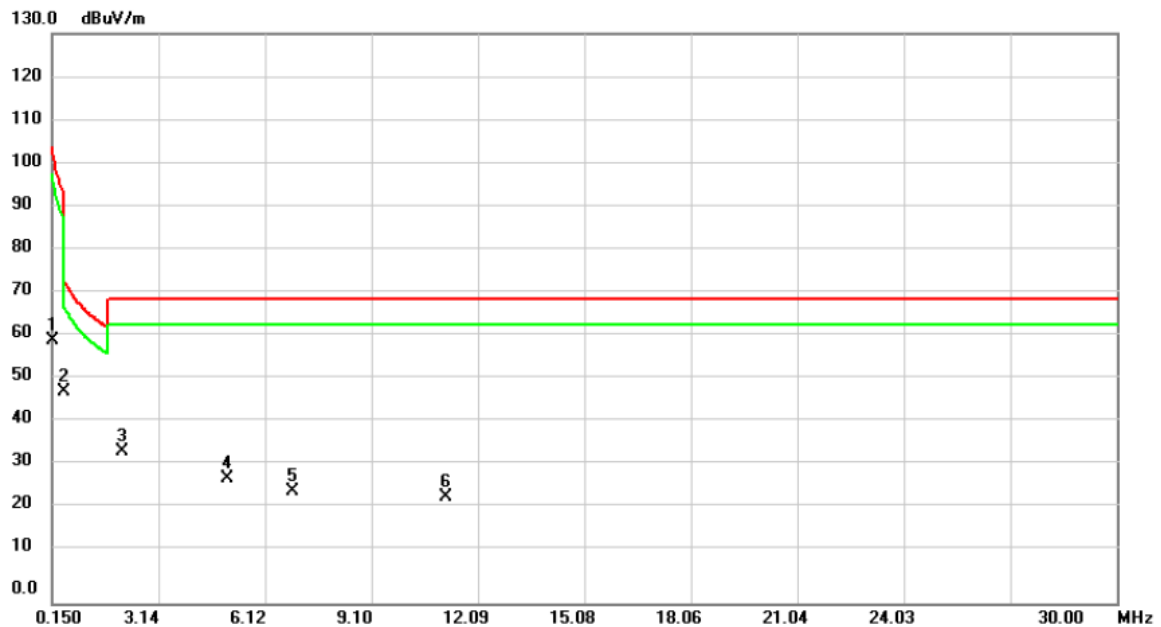

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.1500	47.93	12.03	59.96	104.08	-44.12	peak	
2	*	0.5080	36.55	11.80	48.35	73.49	-25.14	peak	
3		2.1200	23.06	11.50	34.56	69.54	-34.98	peak	
4		5.0750	16.98	11.40	28.38	69.54	-41.16	peak	
5		6.8960	14.14	11.36	25.50	69.54	-44.04	peak	
6		11.1942	12.82	11.26	24.08	69.54	-45.46	peak	

Test Mode:	TX Mode_Desk Docking
------------	----------------------


Ant 0°

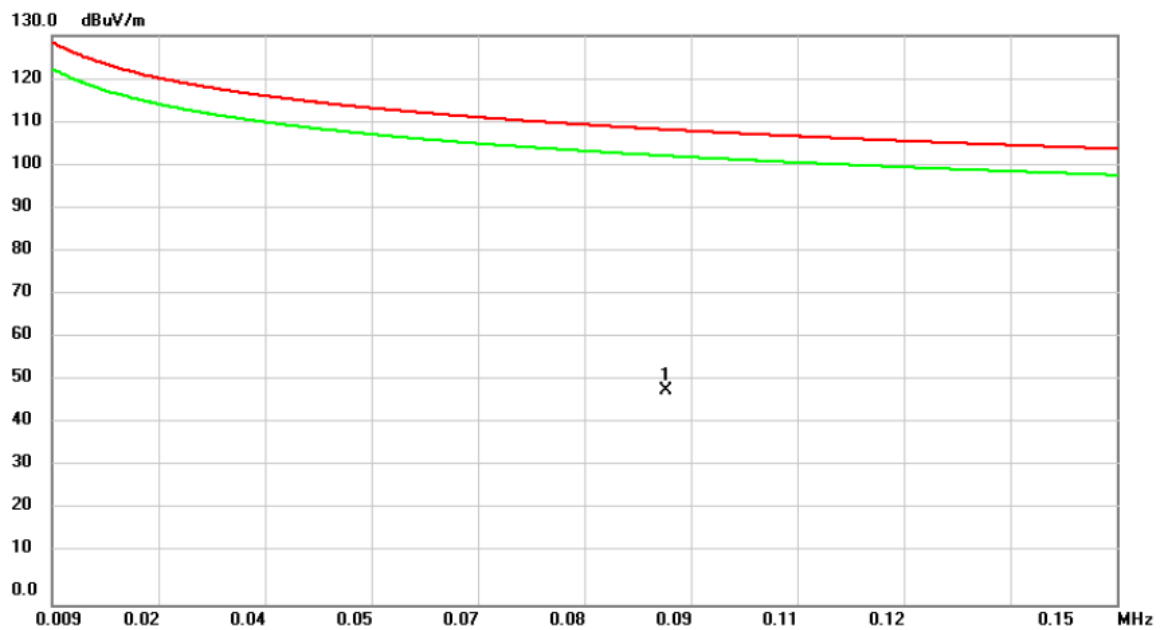

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	0.0903	36.62	12.27	48.89	108.49	-59.60	peak

Test Mode: TX Mode_Desk Docking


Ant 0°

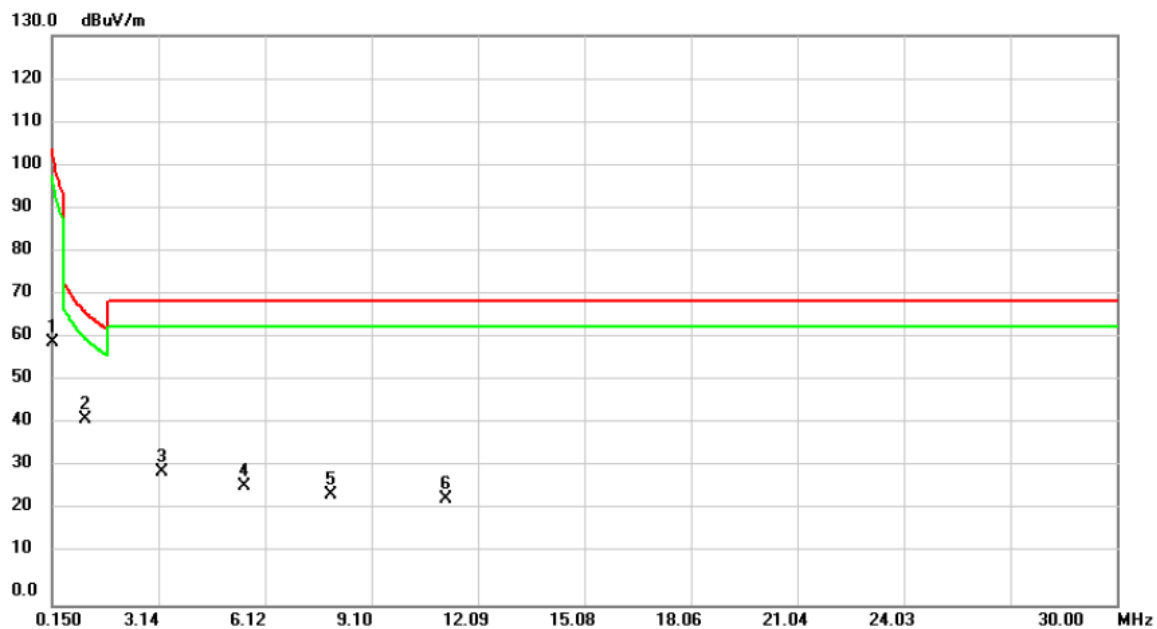

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.1500	47.93	12.03	59.96	104.08	-44.12	peak	
2	*	1.0750	30.36	11.97	42.33	66.98	-24.65	peak	
3		3.2244	19.31	11.13	30.44	69.54	-39.10	peak	
4		5.5230	15.90	11.39	27.29	69.54	-42.25	peak	
5		7.9706	13.82	11.34	25.16	69.54	-44.38	peak	
6		11.1942	12.82	11.26	24.08	69.54	-45.46	peak	

Test Mode:	TX Mode_Desk Docking
------------	----------------------


Ant 90°

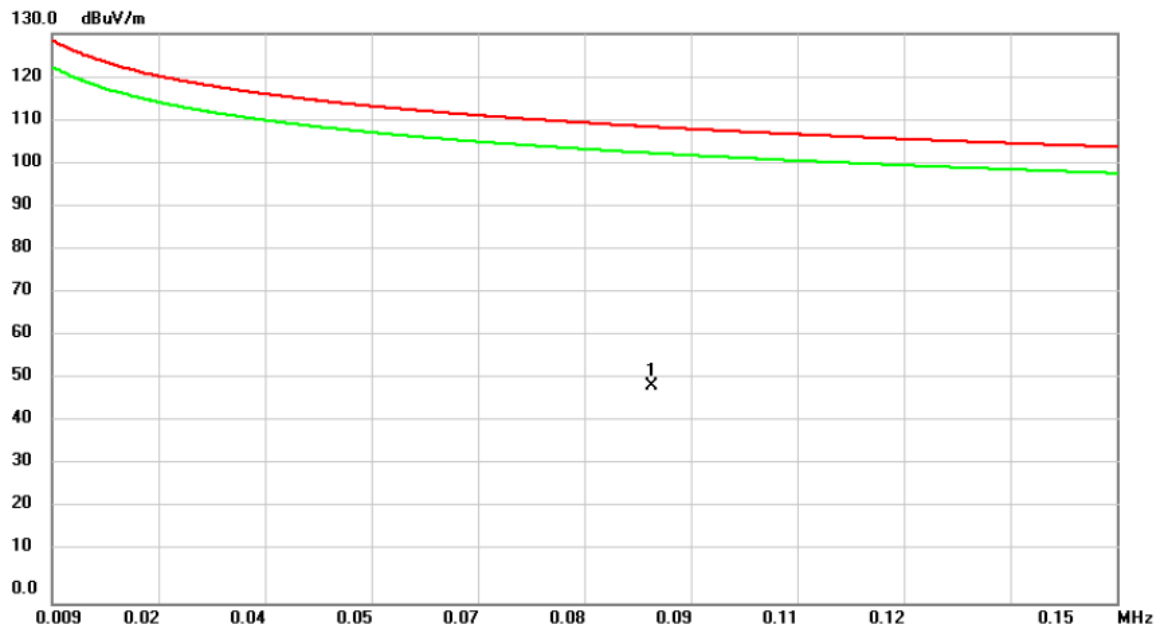

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	0.0884	37.28	12.31	49.59	108.68	-59.09	peak

Test Mode: TX Mode_Desk Docking


Ant 90°

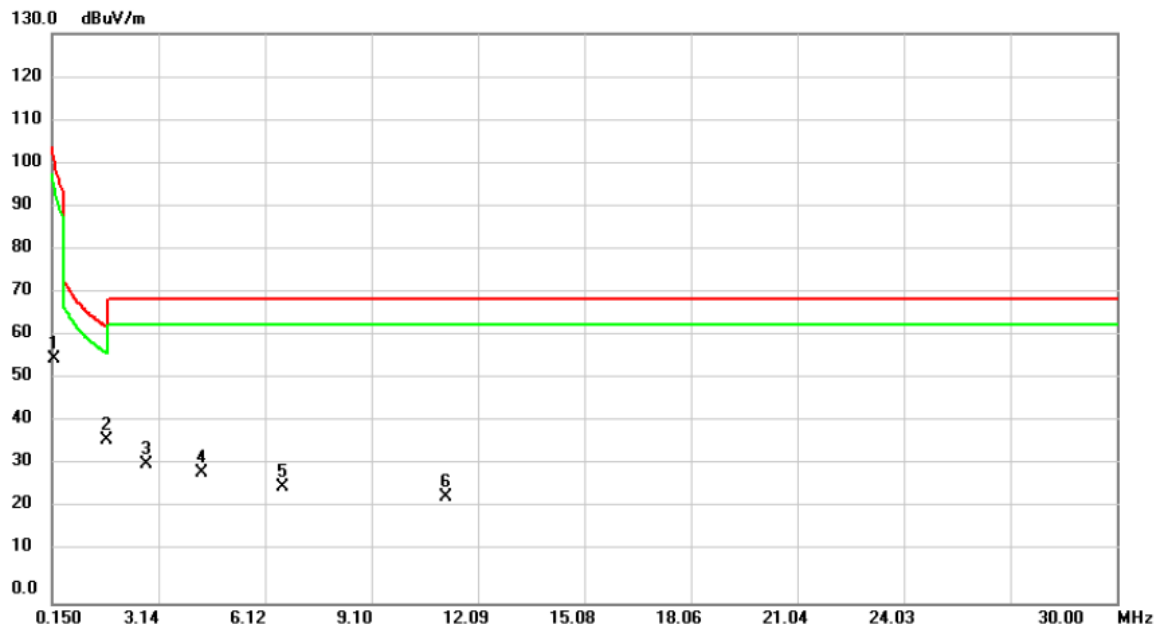

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.2096	43.96	11.94	55.90	101.18	-45.28	peak	
2	*	1.7020	25.41	11.68	37.09	62.98	-25.89	peak	
3		2.8065	20.46	11.19	31.65	69.54	-37.89	peak	
4		4.3290	18.38	11.30	29.68	69.54	-39.86	peak	
5		6.6272	15.26	11.37	26.63	69.54	-42.91	peak	
6		11.1942	12.82	11.26	24.08	69.54	-45.46	peak	

Test Mode:	TX Mode_VESA Docking
------------	----------------------


Ant 0°

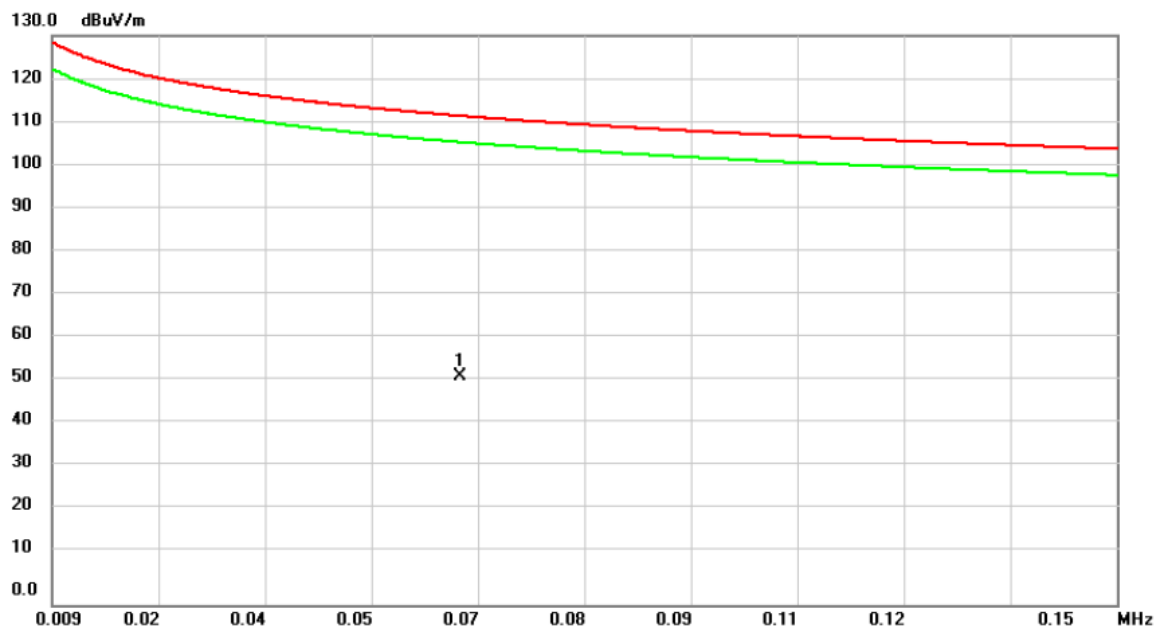

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	0.0630	39.39	12.77	52.16	111.62	-59.46	peak

Test Mode: TX Mode_VESA Docking


Ant 0°

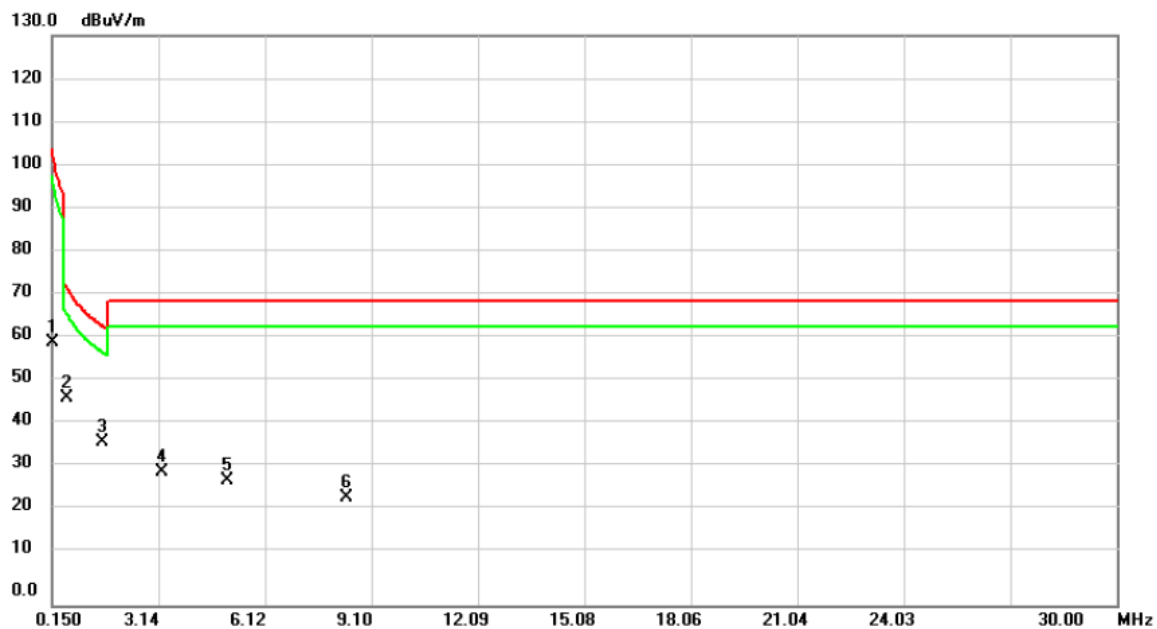

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.1500	47.93	12.03	59.96	104.08	-44.12	peak	
2	*	0.5675	35.40	11.83	47.23	72.52	-25.29	peak	
3		1.5530	25.58	11.75	37.33	63.78	-26.45	peak	
4		3.2244	19.31	11.13	30.44	69.54	-39.10	peak	
5		5.0750	16.98	11.40	28.38	69.54	-41.16	peak	
6		8.4184	13.23	11.33	24.56	69.54	-44.98	peak	

Test Mode:	TX Mode_VESA Docking
------------	----------------------


Ant 90°

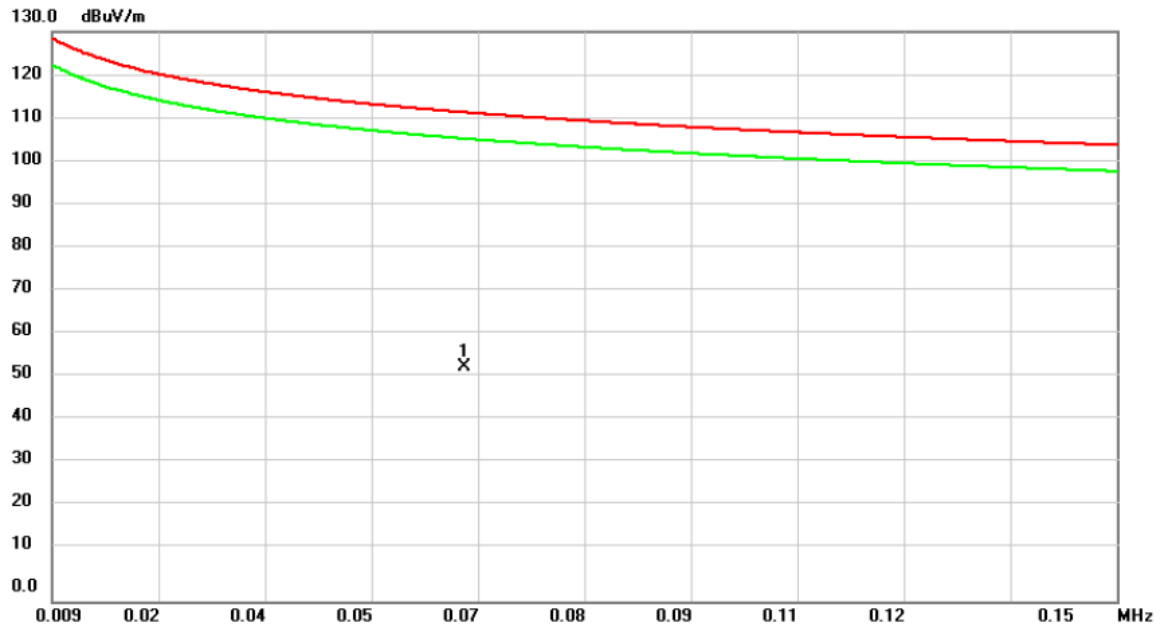

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	0.0637	40.61	12.75	53.36	111.52	-58.16	peak

Test Mode: TX Mode_VESA Docking


Ant 90°

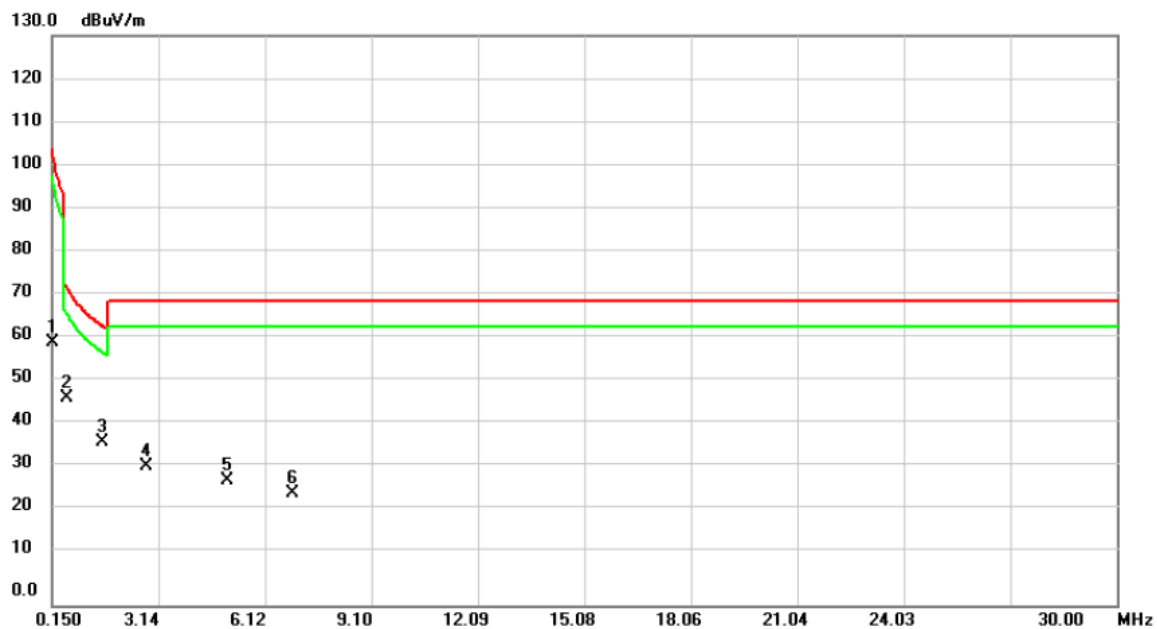

APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode	TX Mode	Polarization	Vertical
-----------	---------	--------------	----------


Orthogonal Axis: X

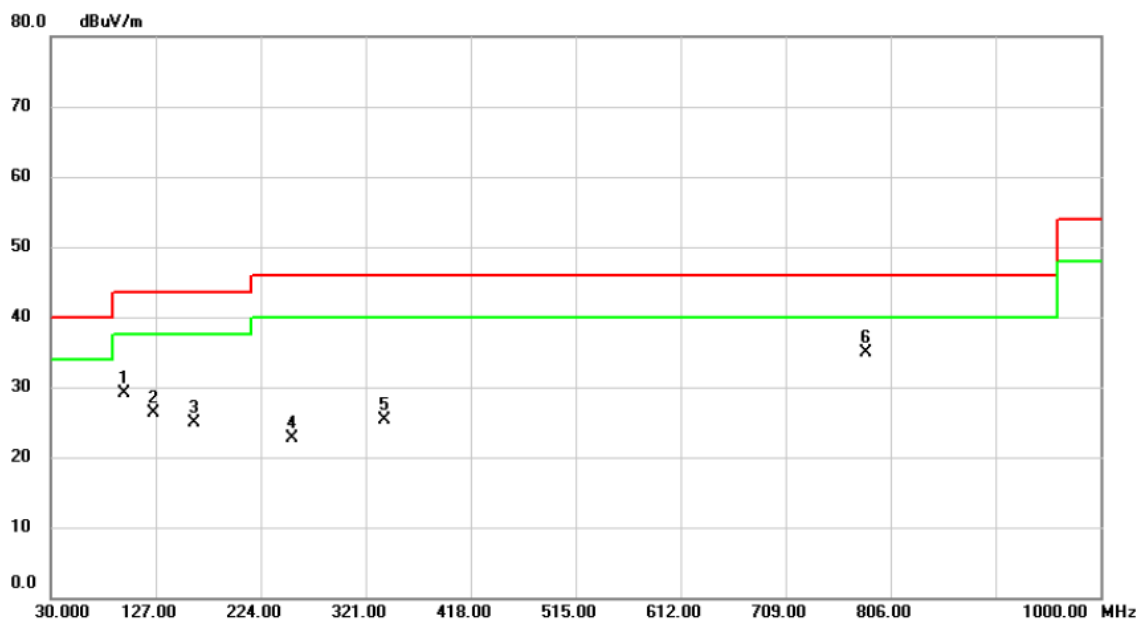

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		97.9000	41.59	-12.42	29.17	43.50	-14.33	peak	
2		125.0600	35.18	-8.91	26.27	43.50	-17.23	peak	
3		161.9200	32.10	-7.26	24.84	43.50	-18.66	peak	
4		253.1000	30.81	-8.17	22.64	46.00	-23.36	peak	
5		338.4600	30.89	-5.64	25.25	46.00	-20.75	peak	
6	*	782.7200	31.55	3.29	34.84	46.00	-11.16	peak	

Test Mode	TX Mode	Polarization	Horizontal
-----------	---------	--------------	------------


Orthogonal Axis: X

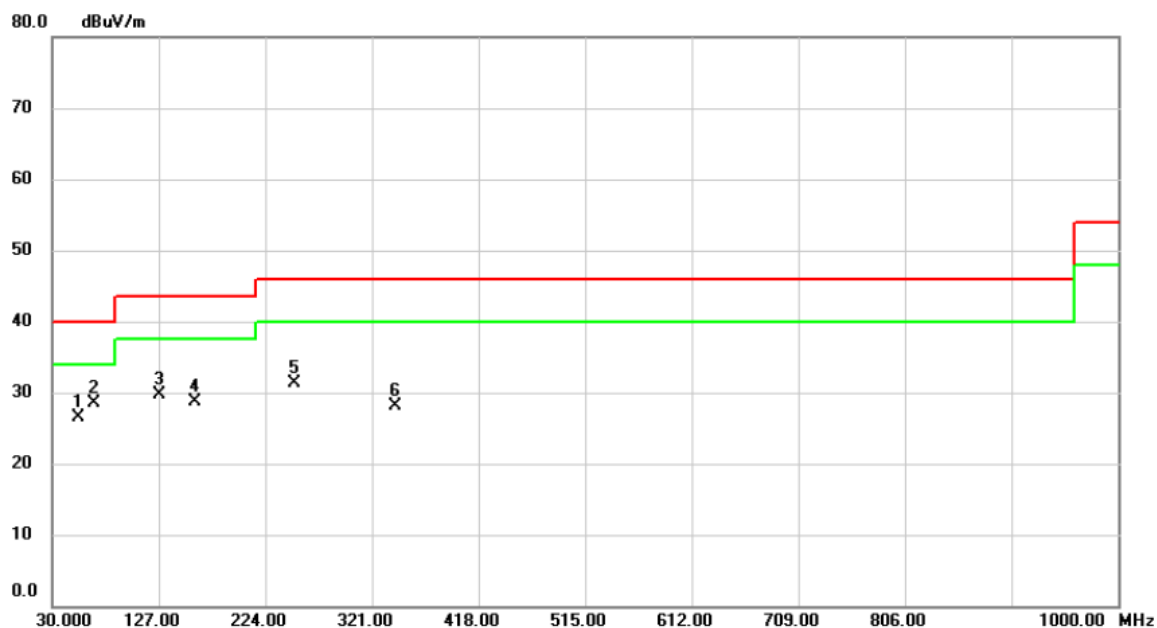

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		53.2800	33.99	-7.57	26.42	40.00	-13.58	peak	
2	*	67.8300	37.83	-9.27	28.56	40.00	-11.44	peak	
3		127.0000	38.42	-8.72	29.70	43.50	-13.80	peak	
4		159.9800	35.96	-7.16	28.80	43.50	-14.70	peak	
5		250.1900	39.54	-8.23	31.31	46.00	-14.69	peak	
6		342.3400	33.59	-5.54	28.05	46.00	-17.95	peak	

Test Mode	TX Mode _Desk Docking	Polarization	Vertical
-----------	-----------------------	--------------	----------


Orthogonal Axis: X

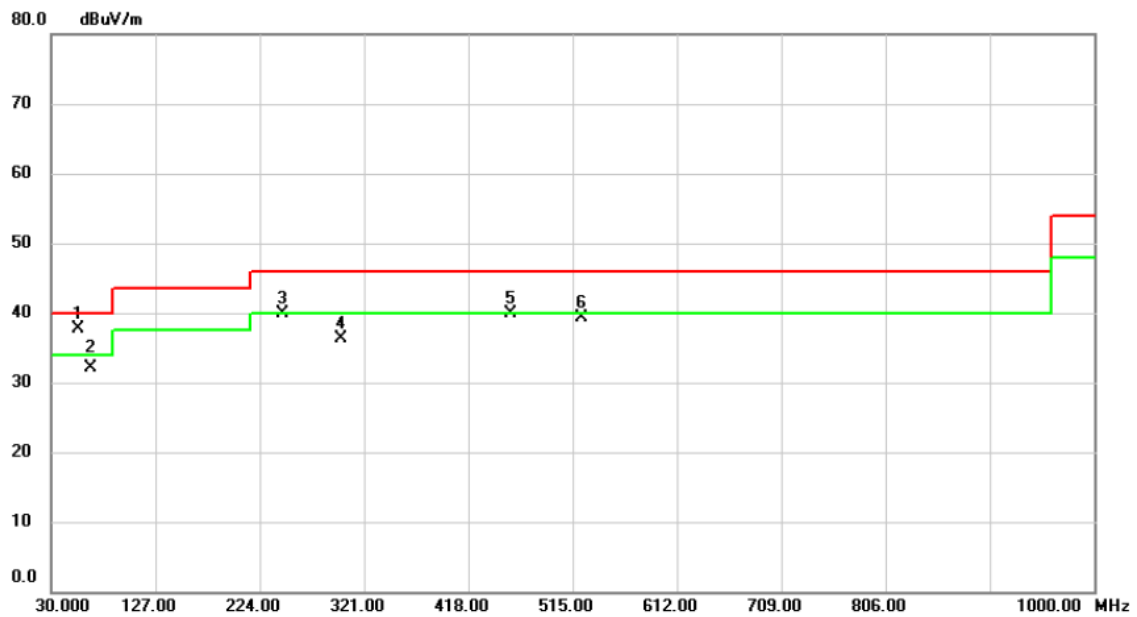

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	55.2200	45.35	-7.58	37.77	40.00	-2.23	peak	
2		66.8600	41.14	-8.97	32.17	40.00	-7.83	QP	
3		245.3400	48.45	-8.54	39.91	46.00	-6.09	peak	
4		299.6600	42.98	-6.74	36.24	46.00	-9.76	peak	
5		456.8000	42.35	-2.46	39.89	46.00	-6.11	peak	
6		522.7600	40.98	-1.58	39.40	46.00	-6.60	peak	

Test Mode	TX Mode _Desk Docking	Polarization	Horizontal
-----------	-----------------------	--------------	------------


Orthogonal Axis: X

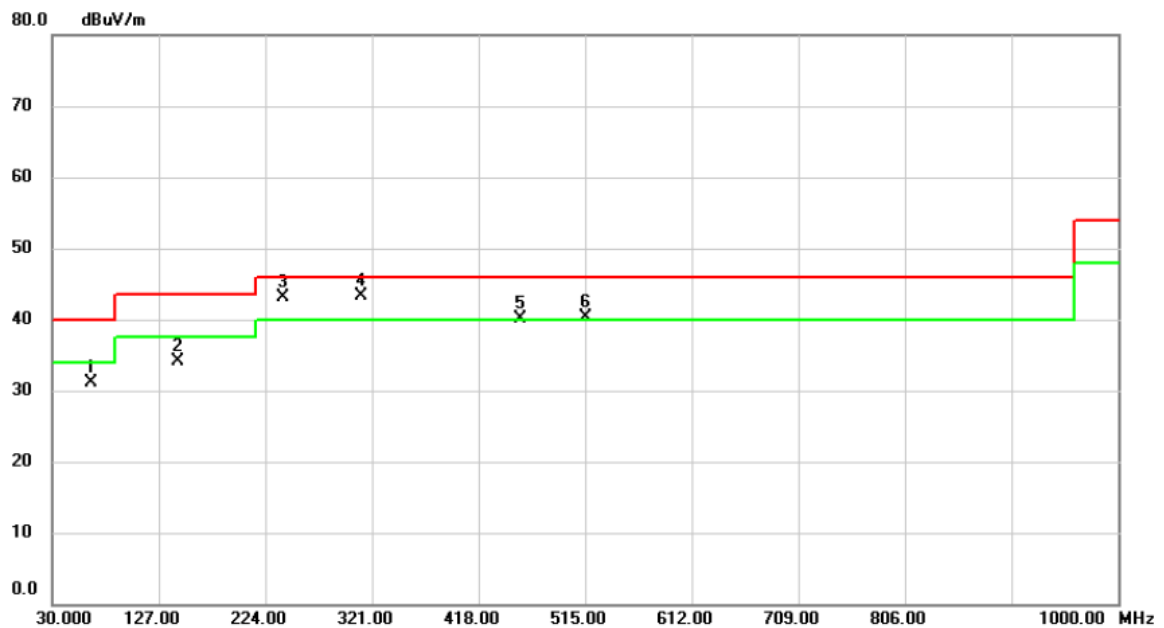

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		65.8900	39.93	-8.81	31.12	40.00	-8.88	peak	
2		144.4600	41.81	-7.71	34.10	43.50	-9.40	peak	
3	!	239.5200	51.89	-8.73	43.16	46.00	-2.84	peak	
4	*	311.3000	49.70	-6.45	43.25	46.00	-2.75	peak	
5	!	455.8300	42.59	-2.48	40.11	46.00	-5.89	peak	
6	!	515.9700	41.85	-1.61	40.24	46.00	-5.76	peak	

Test Mode	TX Mode _VESA Docking	Polarization	Vertical
-----------	-----------------------	--------------	----------


Orthogonal Axis: X

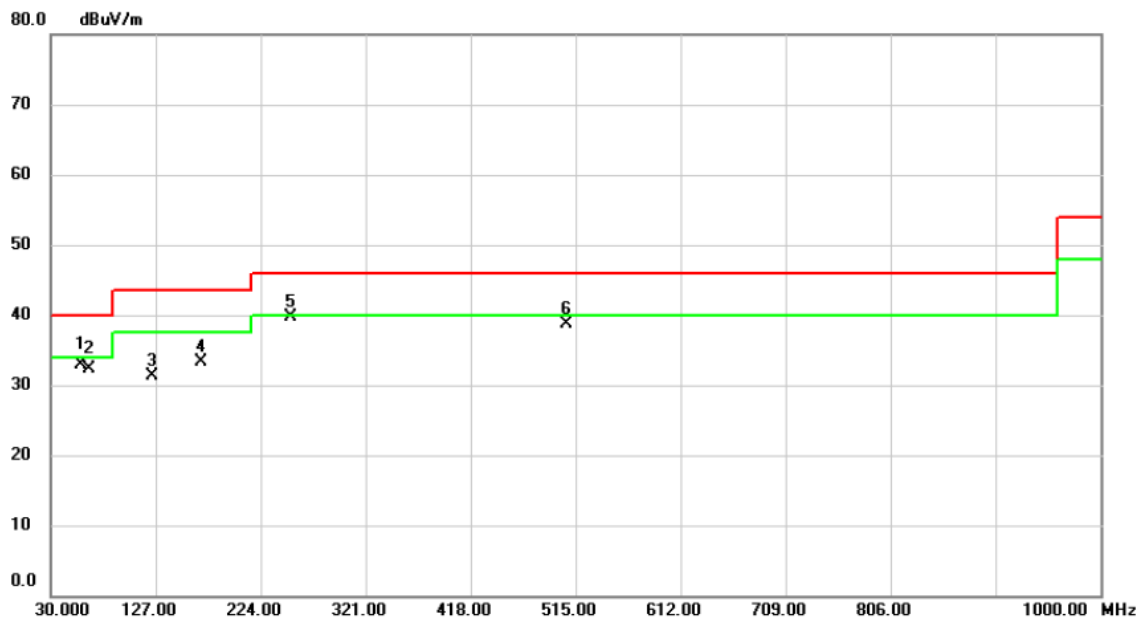

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		58.1300	40.66	-7.75	32.91	40.00	-7.09	QP	
2		65.8900	41.12	-8.81	32.31	40.00	-7.69	QP	
3		123.1200	40.80	-9.52	31.28	43.50	-12.22	peak	
4		168.7100	40.97	-7.74	33.23	43.50	-10.27	peak	
5	*	251.1600	48.03	-8.40	39.63	46.00	-6.37	peak	
6		506.2700	40.40	-1.66	38.74	46.00	-7.26	peak	

Test Mode	TX Mode _VESA Docking	Polarization	Horizontal
-----------	-----------------------	--------------	------------


Orthogonal Axis: X

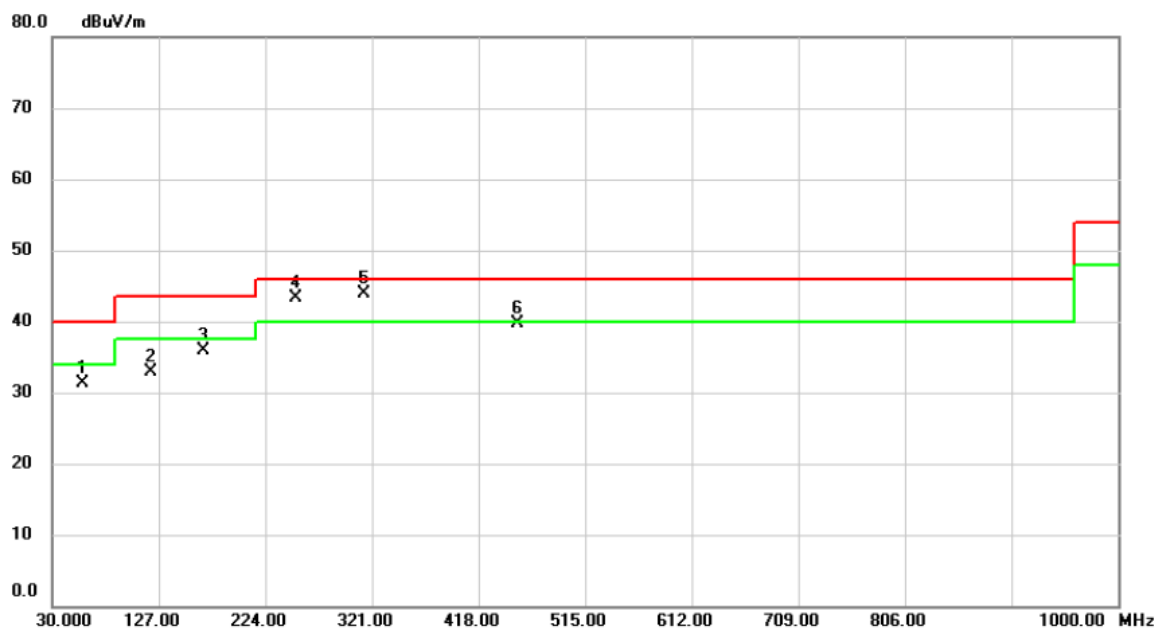

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		57.1600	39.05	-7.69	31.36	40.00	-8.64	peak	
2		119.2400	42.80	-9.91	32.89	43.50	-10.61	peak	
3		167.7400	43.69	-7.69	36.00	43.50	-7.50	peak	
4	!	252.1300	51.62	-8.37	43.25	46.00	-2.75	peak	
5	*	313.2400	50.24	-6.42	43.82	46.00	-2.18	peak	
6		453.8900	42.30	-2.51	39.79	46.00	-6.21	peak	

Test Mode	TX Mode 2480MHz _CH39_1Mbps _ Adapter: FSP / FSP065-DBCM1	Polarization	Vertical
-----------	--	--------------	----------


Orthogonal Axis: Y

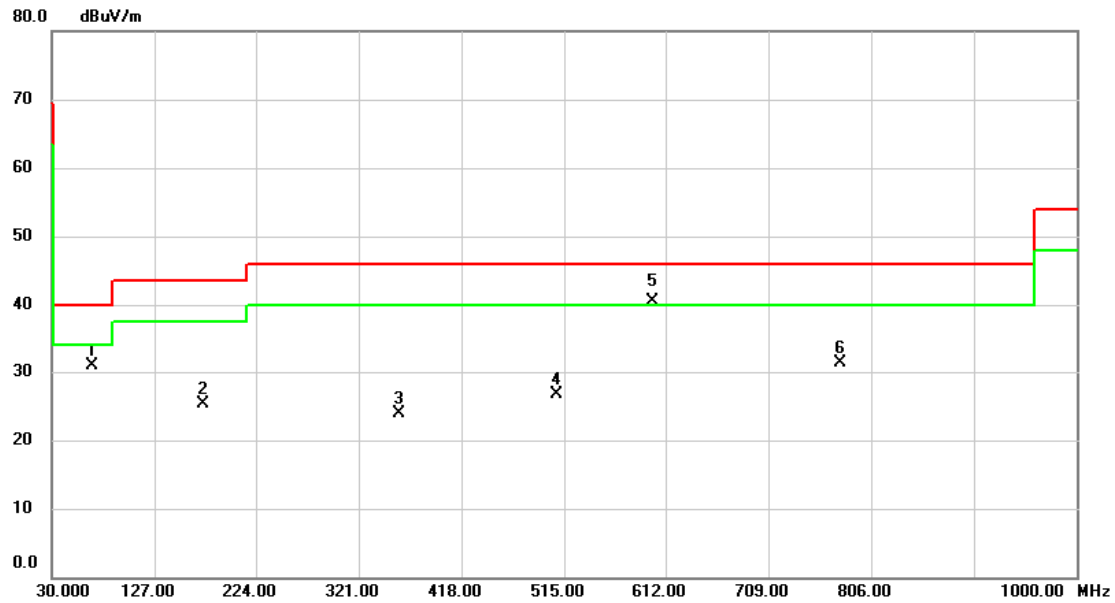

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	68.7030	41.24	-10.32	30.92	40.00	-9.08	peak	
2	174.0772	34.32	-9.07	25.25	43.50	-18.25	peak	
3	359.1210	29.87	-5.90	23.97	46.00	-22.03	peak	
4	508.5333	29.33	-2.58	26.75	46.00	-19.25	peak	
5 *	600.0043	41.11	-0.63	40.48	46.00	-5.52	QP	
6	776.5767	29.13	2.26	31.39	46.00	-14.61	peak	

Test Mode	TX Mode 2480MHz _CH39_1Mbps _ Adapter: FSP / FSP065-DBCM1	Polarization	Horizontal
-----------	--	--------------	------------


Orthogonal Axis: Y

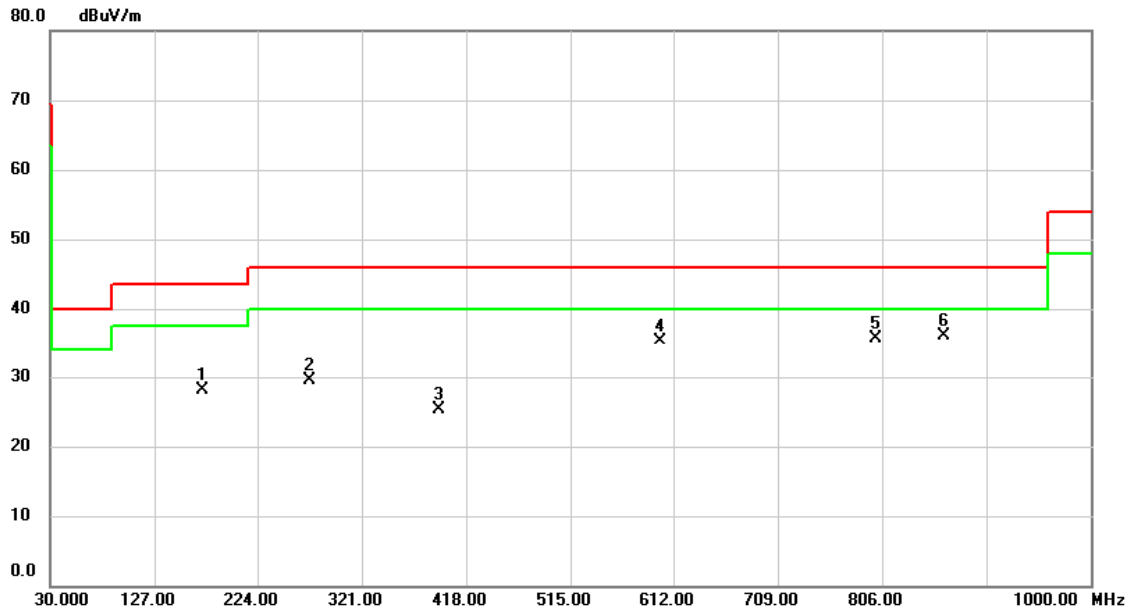

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		172.5253	37.02	-8.89	28.13	43.50	-15.37	peak	
2		272.5000	37.77	-8.23	29.54	46.00	-16.46	peak	
3		393.2327	30.32	-5.01	25.31	46.00	-20.69	peak	
4		599.9720	35.85	-0.63	35.22	46.00	-10.78	peak	
5		799.9860	33.17	2.56	35.73	46.00	-10.27	peak	
6	*	864.0060	32.40	3.62	36.02	46.00	-9.98	peak	

Test Mode	TX Mode 2480MHz_CH39_1Mbps_Adapter: FSP / FSP065-DBCM1+ VESA Docking	Polarization	Vertical
-----------	---	--------------	----------


Orthogonal Axis: X

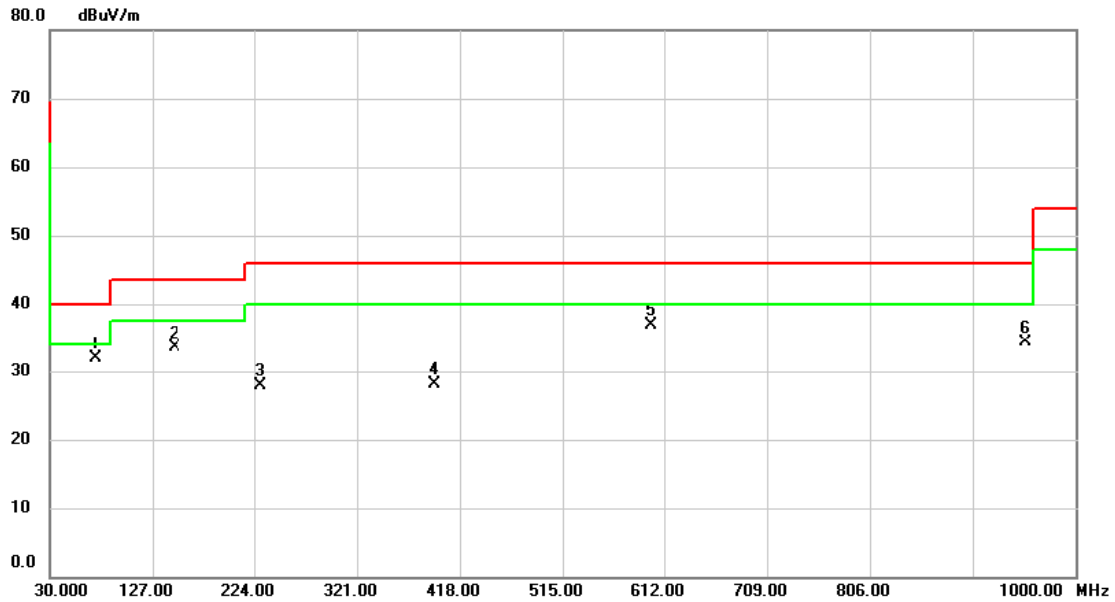

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	72.9710	43.09	-11.22	31.87	40.00	-8.13	peak	
2		147.9197	41.98	-8.53	33.45	43.50	-10.05	peak	
3		229.3350	38.28	-10.39	27.89	46.00	-18.11	peak	
4		393.4590	33.05	-5.01	28.04	46.00	-17.96	peak	
5		599.9720	37.61	-0.63	36.98	46.00	-9.02	peak	
6		953.0197	29.12	5.12	34.24	46.00	-11.76	peak	

Test Mode	TX Mode 2480MHz_CH39_1Mbps_Adapter: FSP / FSP065-DBCM1+ VESA Docking	Polarization	Horizontal
-----------	---	--------------	------------

Orthogonal Axis: X

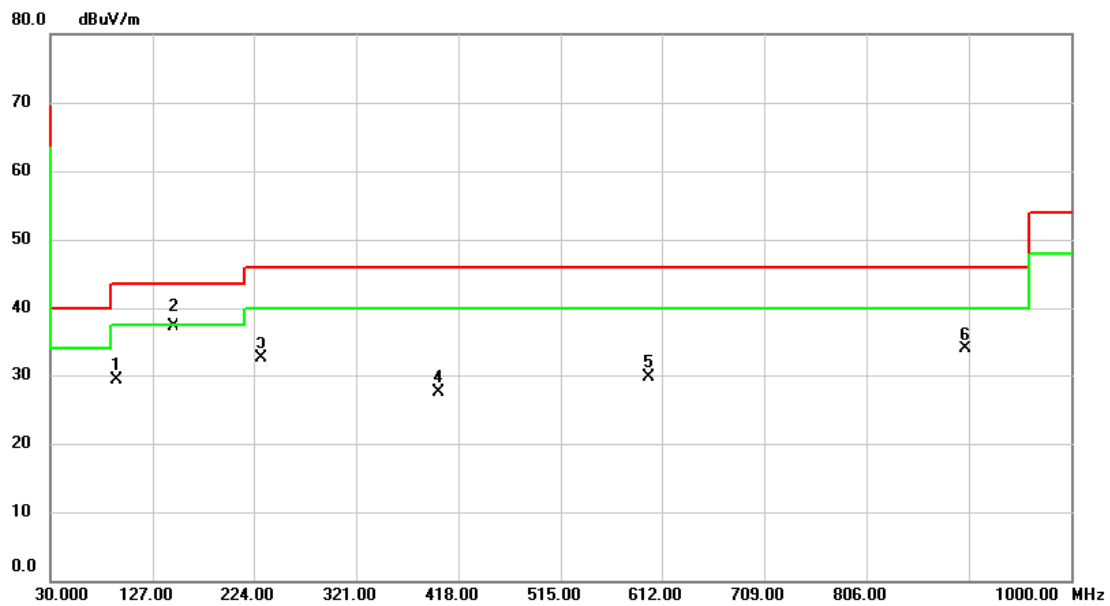


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		92.1122	43.69	-14.48	29.21	43.50	-14.29	peak	
2	*	147.1436	45.78	-8.54	37.24	43.50	-6.26	QP	
3		231.5983	42.77	-10.25	32.52	46.00	-13.48	peak	
4		399.3436	32.32	-4.85	27.47	46.00	-18.53	peak	
5		600.0043	30.42	-0.63	29.79	46.00	-16.21	peak	
6		900.2193	29.78	4.15	33.93	46.00	-12.07	peak	

APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)

Test Mode	TX Mode 2402MHz _CH00_1Mbps	Polarization	Vertical
-----------	-----------------------------	--------------	----------


Orthogonal Axis: X

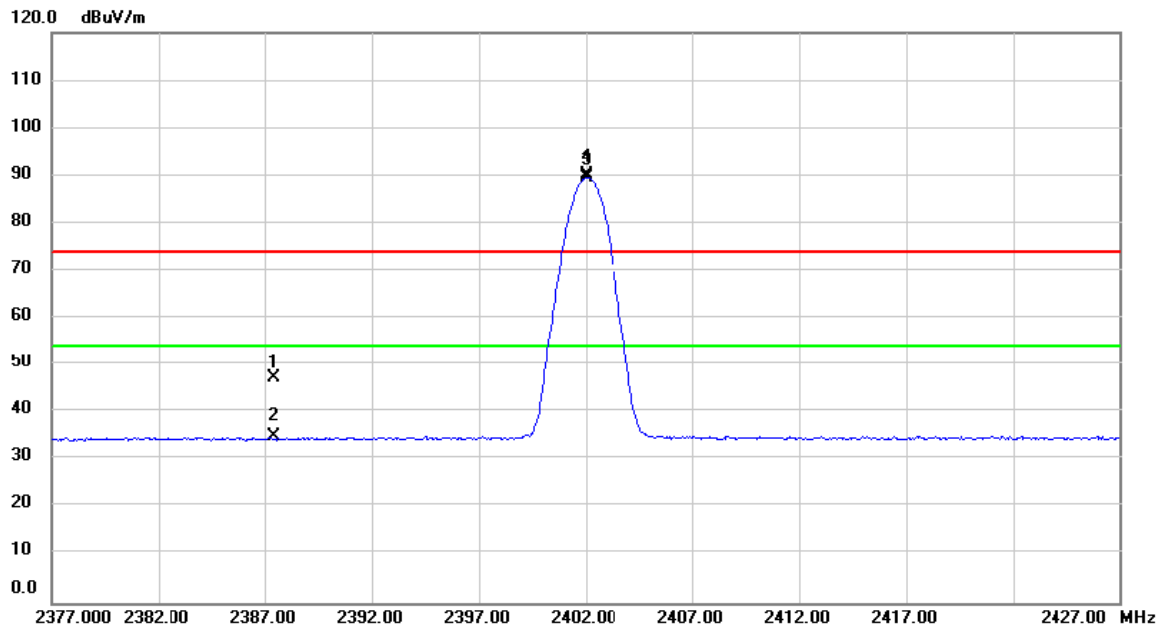

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2387.465	15.93	31.47	47.40	74.00	-26.60	peak	
2		2387.465	3.53	31.47	35.00	54.00	-19.00	AVG	
3	X	2402.000	58.73	31.52	90.25	74.00	16.25	peak	No Limit
4	*	2402.000	58.07	31.52	89.59	54.00	35.59	AVG	No Limit

Test Mode	TX Mode 2402MHz _CH00_1Mbps	Polarization	Vertical
-----------	-----------------------------	--------------	----------


Orthogonal Axis: X

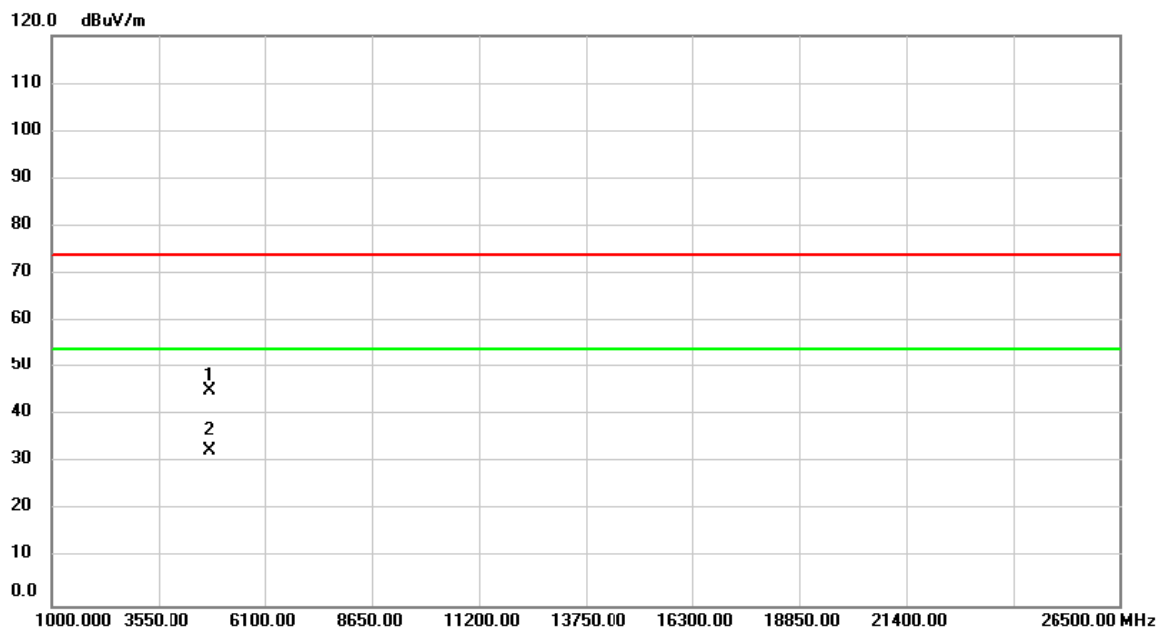

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.000	55.79	-10.66	45.13	74.00	-28.87	peak	
2	*	4804.000	43.15	-10.66	32.49	54.00	-21.51	AVG	

Test Mode	TX Mode 2402MHz _CH00_1Mbps	Polarization	Horizontal
-----------	-----------------------------	--------------	------------


Orthogonal Axis: X

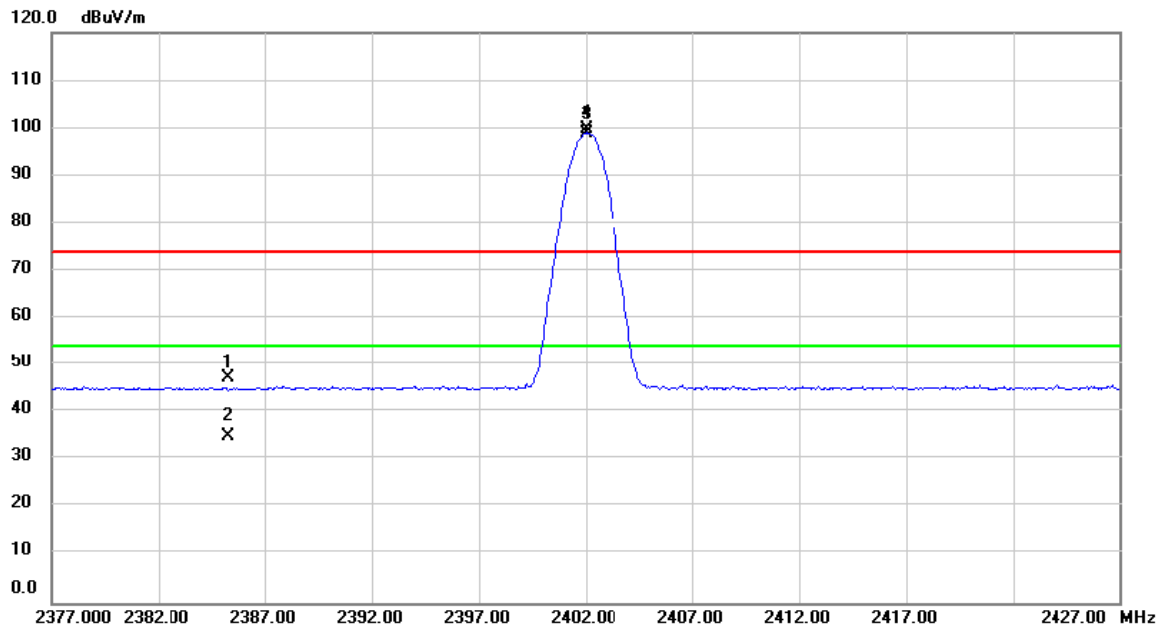

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2385.333	15.67	31.45	47.12	74.00	-26.88	peak	
2		2385.333	3.49	31.45	34.94	54.00	-19.06	AVG	
3	X	2402.000	68.10	31.52	99.62	74.00	25.62	peak	No Limit
4	*	2402.000	67.48	31.52	99.00	54.00	45.00	AVG	No Limit

Test Mode	TX Mode 2402MHz _CH00_1Mbps	Polarization	Horizontal
-----------	-----------------------------	--------------	------------


Orthogonal Axis: X

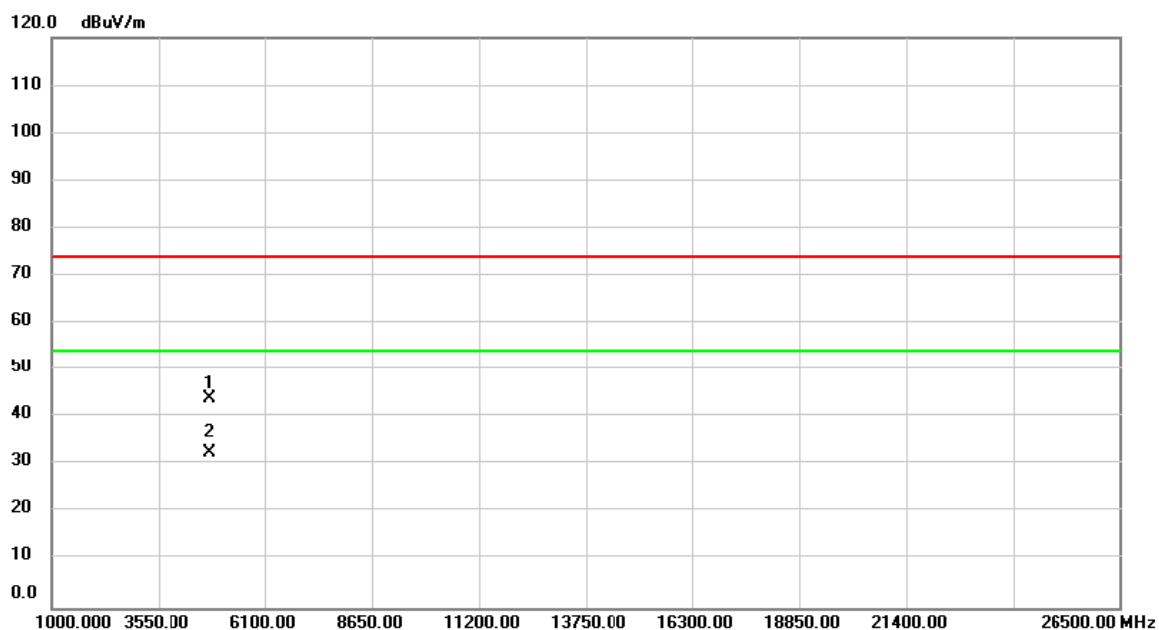

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.000	54.76	-10.66	44.10	74.00	-29.90	peak	
2	*	4804.000	43.23	-10.66	32.57	54.00	-21.43	AVG	

Test Mode	TX Mode 2440MHz _CH19_1Mbps	Polarization	Vertical
-----------	-----------------------------	--------------	----------


Orthogonal Axis: X

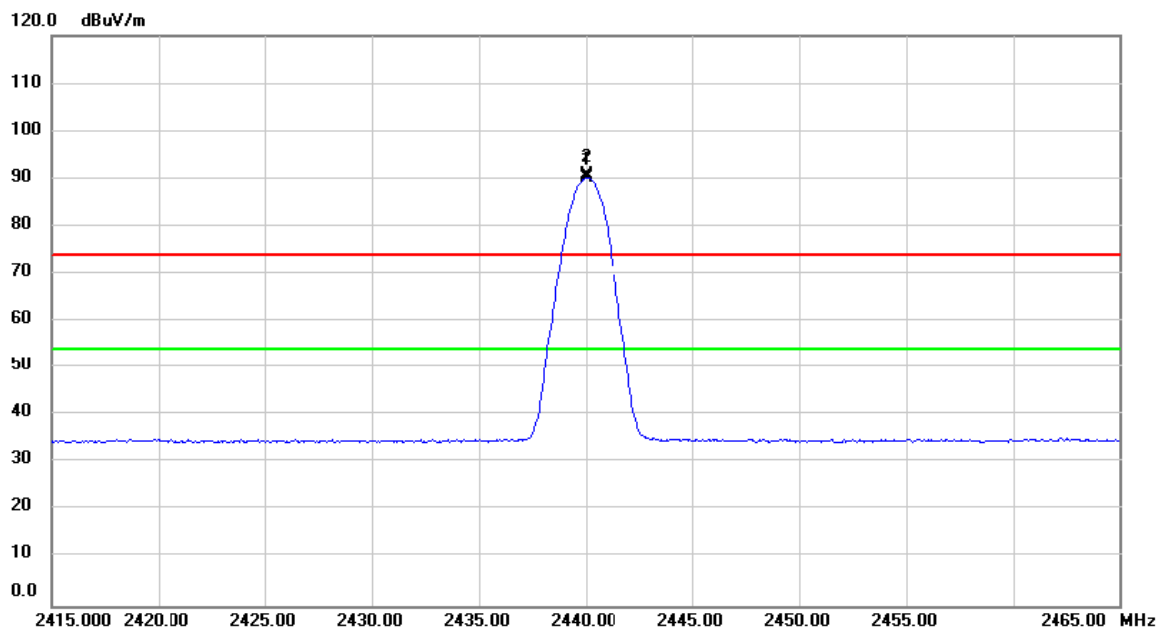

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2440.000	59.21	31.65	90.86	74.00	16.86	peak	No Limit
2	*	2440.000	58.57	31.65	90.22	54.00	36.22	AVG	No Limit

Test Mode	TX Mode 2440MHz _CH19_ 1Mbps	Polarization	Vertical
-----------	------------------------------	--------------	----------


Orthogonal Axis: X

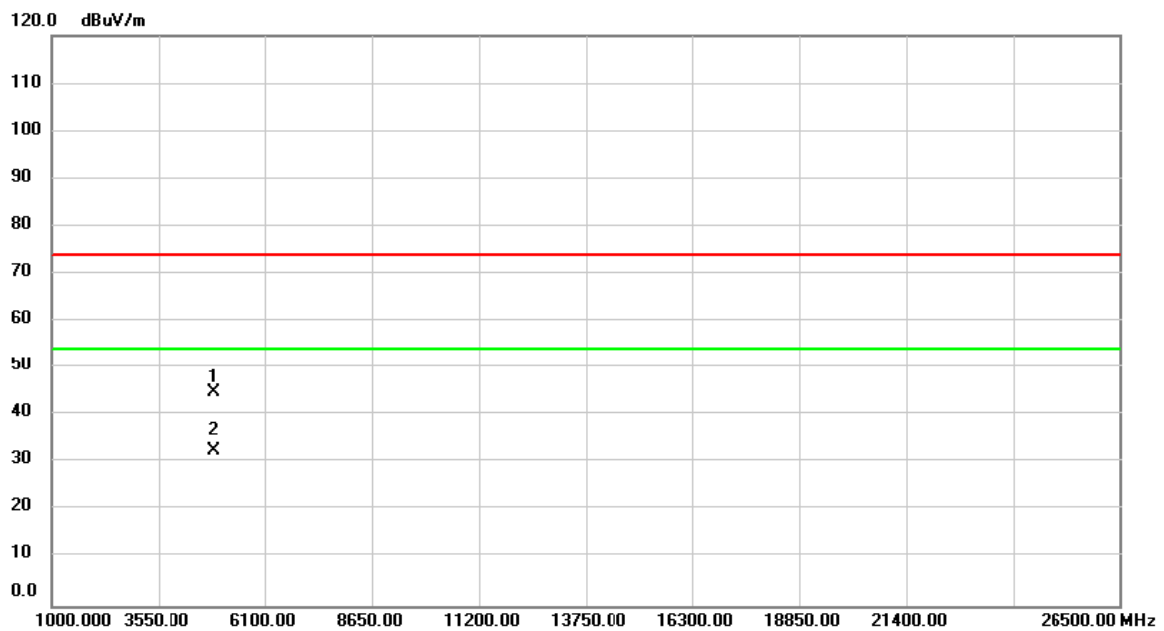

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4880.000	55.28	-10.51	44.77	74.00	-29.23	peak	
2	*	4880.000	43.12	-10.51	32.61	54.00	-21.39	AVG	

Test Mode	TX Mode 2440MHz _CH19_1Mbps	Polarization	Horizontal
-----------	-----------------------------	--------------	------------


Orthogonal Axis: X

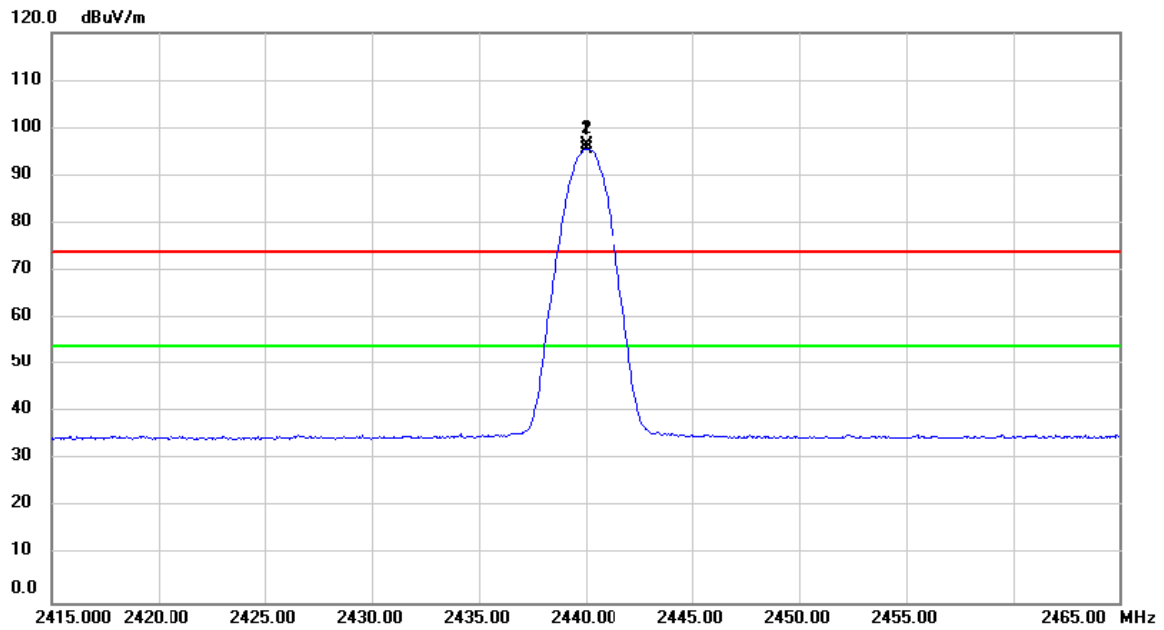

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2440.000	64.87	31.65	96.52	74.00	22.52	peak	No Limit
2	*	2440.000	64.04	31.65	95.69	54.00	41.69	AVG	No Limit

Test Mode	TX Mode 2440MHz _CH19_ 1Mbps	Polarization	Horizontal
-----------	------------------------------	--------------	------------


Orthogonal Axis: X

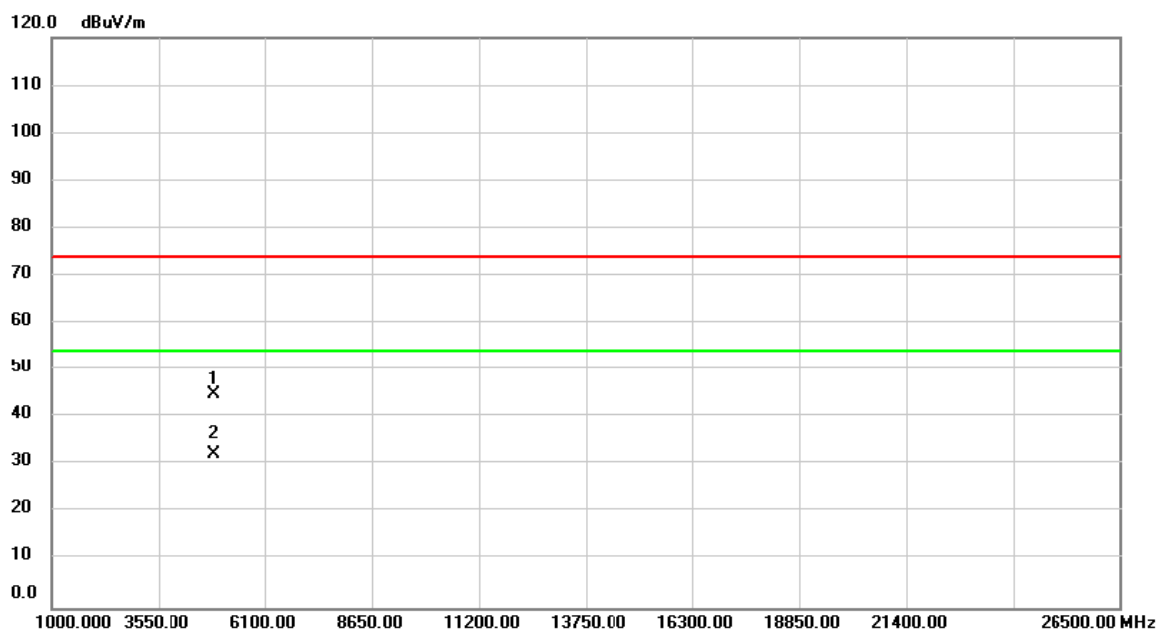

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4880.000	55.28	-10.51	44.77	74.00	-29.23	peak	
2	*	4880.000	42.82	-10.51	32.31	54.00	-21.69	AVG	

Test Mode	TX Mode 2480MHz _CH39_1Mbps	Polarization	Vertical
-----------	-----------------------------	--------------	----------


Orthogonal Axis: X

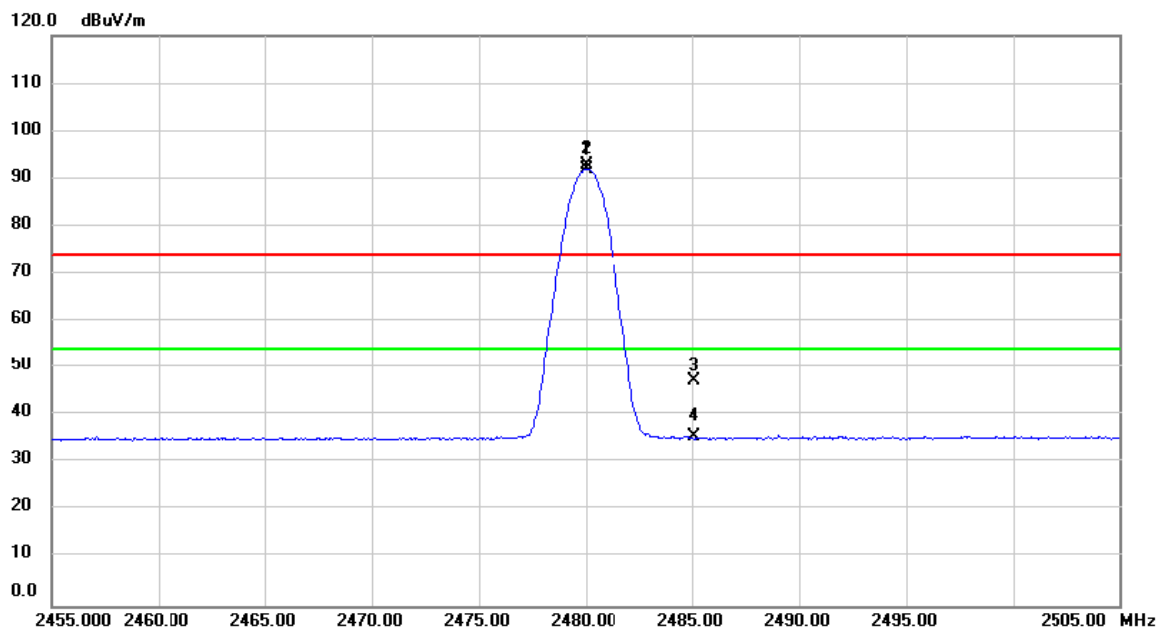

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2480.000	60.92	31.80	92.72	74.00	18.72	peak	No Limit
2	*	2480.000	60.27	31.80	92.07	54.00	38.07	AVG	No Limit
3		2485.113	15.54	31.81	47.35	74.00	-26.65	peak	
4		2485.113	3.68	31.81	35.49	54.00	-18.51	AVG	

Test Mode	TX Mode 2480MHz _CH39_ 1Mbps	Polarization	Vertical
-----------	------------------------------	--------------	----------


Orthogonal Axis: X

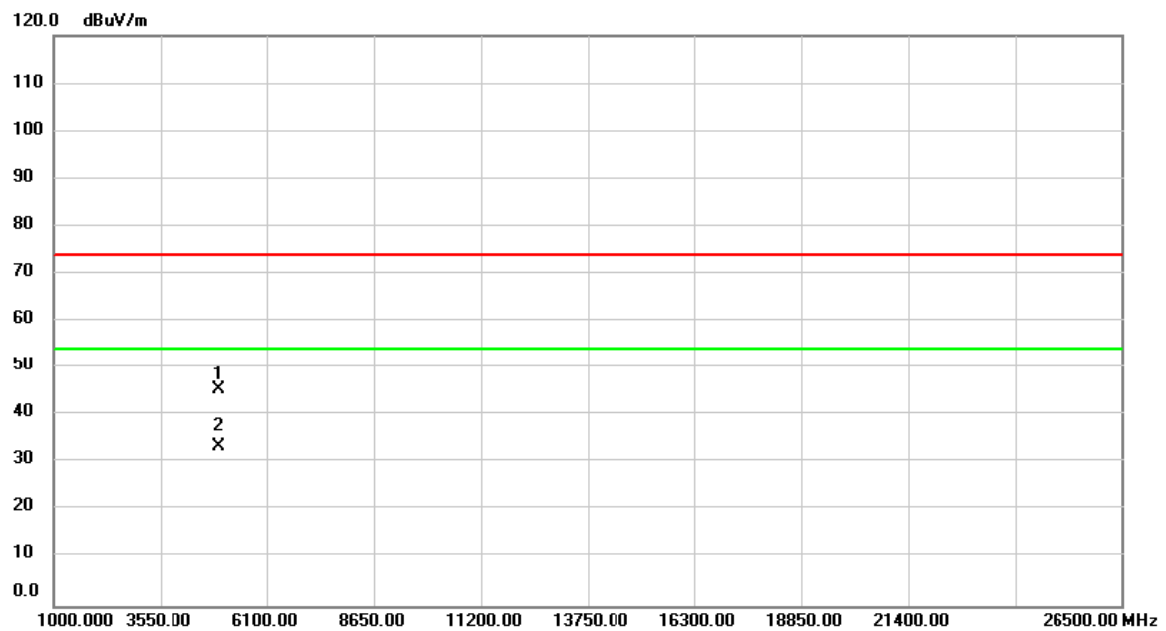

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960.000	55.80	-10.36	45.44	74.00	-28.56	peak	
2	*	4960.000	43.67	-10.36	33.31	54.00	-20.69	AVG	

Test Mode	TX Mode 2480MHz _CH39_1Mbps	Polarization	Horizontal
-----------	-----------------------------	--------------	------------


Orthogonal Axis: X

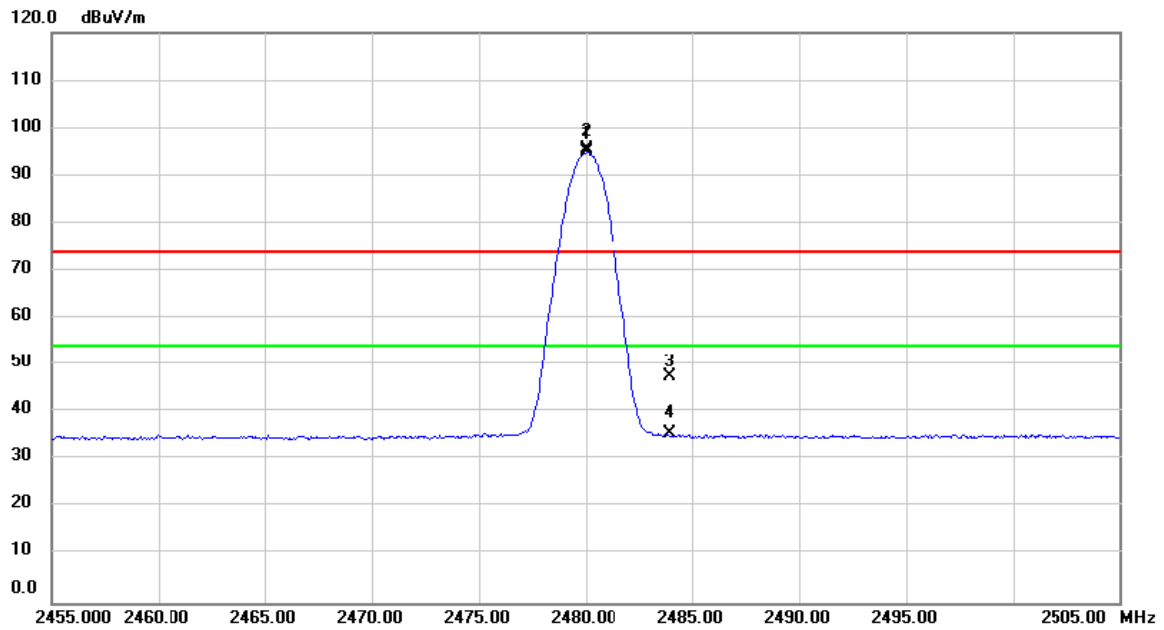

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	2480.000	63.73	31.80	95.53	74.00	21.53	peak	No Limit
2	*	2480.000	63.04	31.80	94.84	54.00	40.84	AVG	No Limit
3		2483.994	15.68	31.81	47.49	74.00	-26.51	peak	
4		2483.994	3.87	31.81	35.68	54.00	-18.32	AVG	

Test Mode	TX Mode 2480MHz _CH39_ 1Mbps	Polarization	Horizontal
-----------	------------------------------	--------------	------------

Orthogonal Axis: X

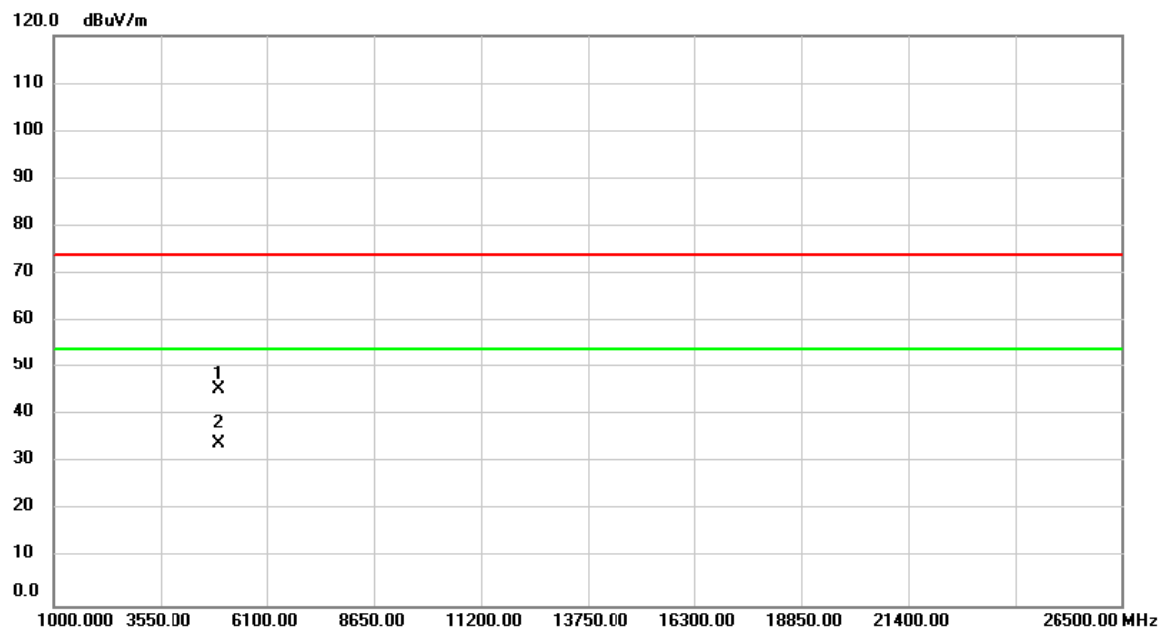


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960.000	55.69	-10.36	45.33	74.00	-28.67	peak	
2	*	4960.000	44.30	-10.36	33.94	54.00	-20.06	AVG	

Spot check test:

Test Mode	TX Mode 2402MHz _CH00_1Mbps	Polarization	Horizontal
-----------	-----------------------------	--------------	------------

Orthogonal Axis: Y

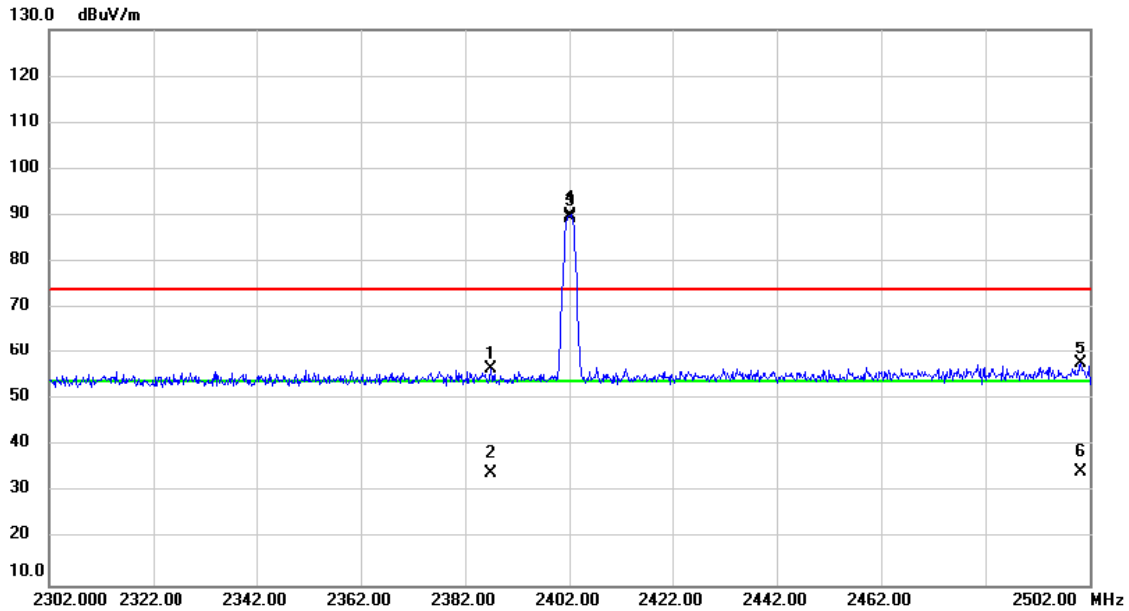


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2386.927	25.97	30.78	56.75	74.00	-17.25	peak	
2		2386.927	3.24	30.78	34.02	54.00	-19.98	AVG	
3	X	2402.000	59.26	30.84	90.10	74.00	16.10	peak	No Limit
4	*	2402.000	58.40	30.84	89.24	54.00	35.24	AVG	No Limit
5		2500.380	26.53	31.23	57.76	74.00	-16.24	peak	
6		2500.380	3.33	31.23	34.56	54.00	-19.44	AVG	

REMARKS:

(1) Both Vertical and Horizontal are evaluated, but only the worst case (Horizontal) is recorded.

Test Mode	TX Mode 2480MHz _CH39_1Mbps	Polarization	Horizontal
-----------	-----------------------------	--------------	------------

Orthogonal Axis: Y

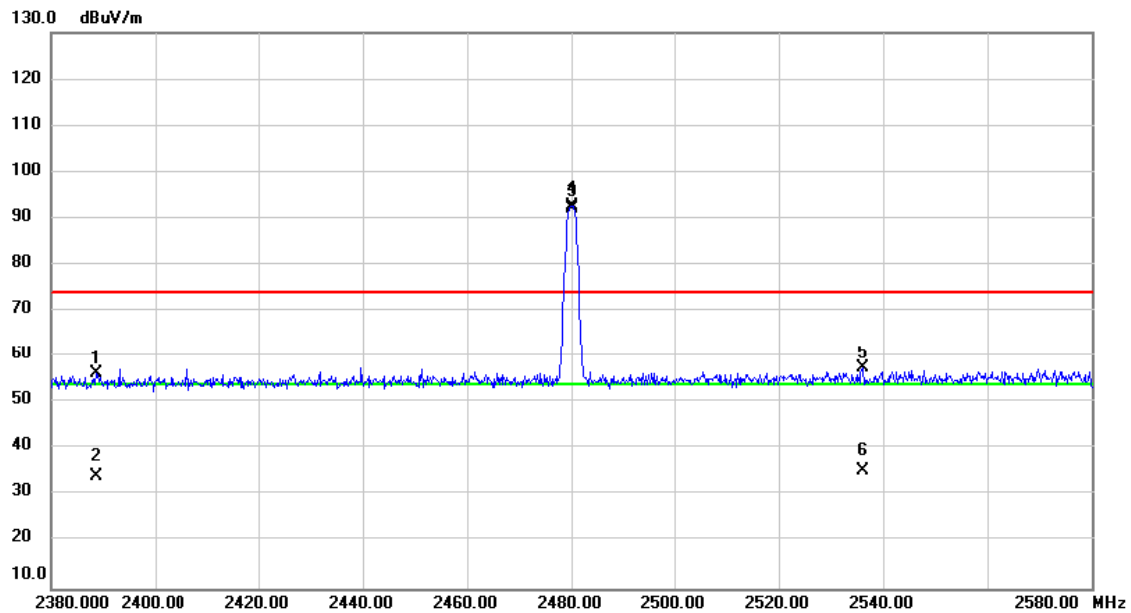


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2388.587	25.60	30.78	56.38	74.00	-17.62	peak	
2		2388.587	3.42	30.78	34.20	54.00	-19.80	AVG	
3	X	2480.000	61.52	31.15	92.67	74.00	18.67	peak	No Limit
4	*	2480.000	60.78	31.15	91.93	54.00	37.93	AVG	No Limit
5		2536.000	26.07	31.38	57.45	74.00	-16.55	peak	
6		2536.000	3.93	31.38	35.31	54.00	-18.69	AVG	

REMARKS:


(1) Both Vertical and Horizontal are evaluated, but only the worst case (Horizontal) is recorded.

Test Mode	TX Mode 2402MHz _CH00_1Mbps	Polarization	Vertical
-----------	-----------------------------	--------------	----------

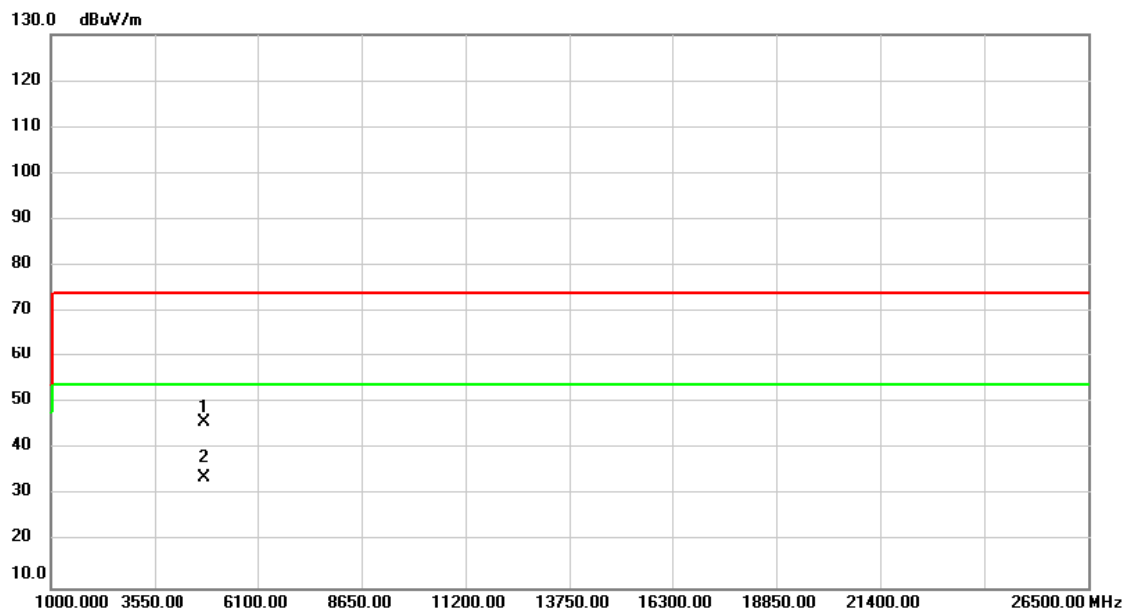


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.000	55.76	-10.03	45.73	74.00	-28.27	peak	
2	*	4804.000	43.89	-10.03	33.86	54.00	-20.14	AVG	

Test Mode	TX Mode 2402MHz _CH00_1Mbps	Polarization	Horizontal
-----------	-----------------------------	--------------	------------

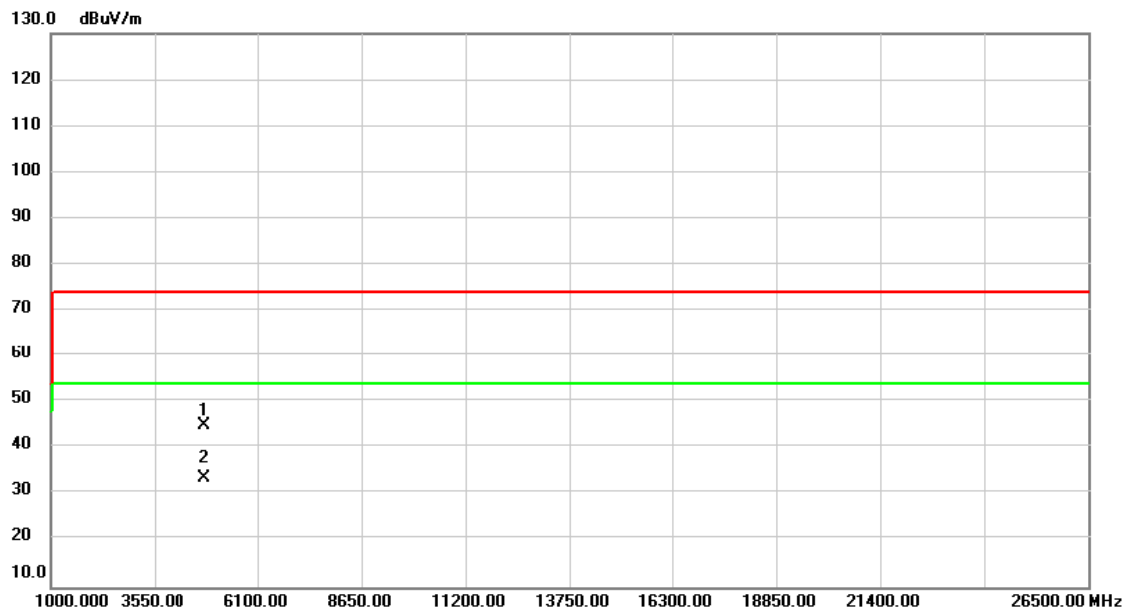


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.000	54.96	-10.03	44.93	74.00	-29.07	peak	
2	*	4804.000	43.60	-10.03	33.57	54.00	-20.43	AVG	

Test Mode	TX Mode 2440MHz _CH19_ 1Mbps	Polarization	Vertical
-----------	------------------------------	--------------	----------

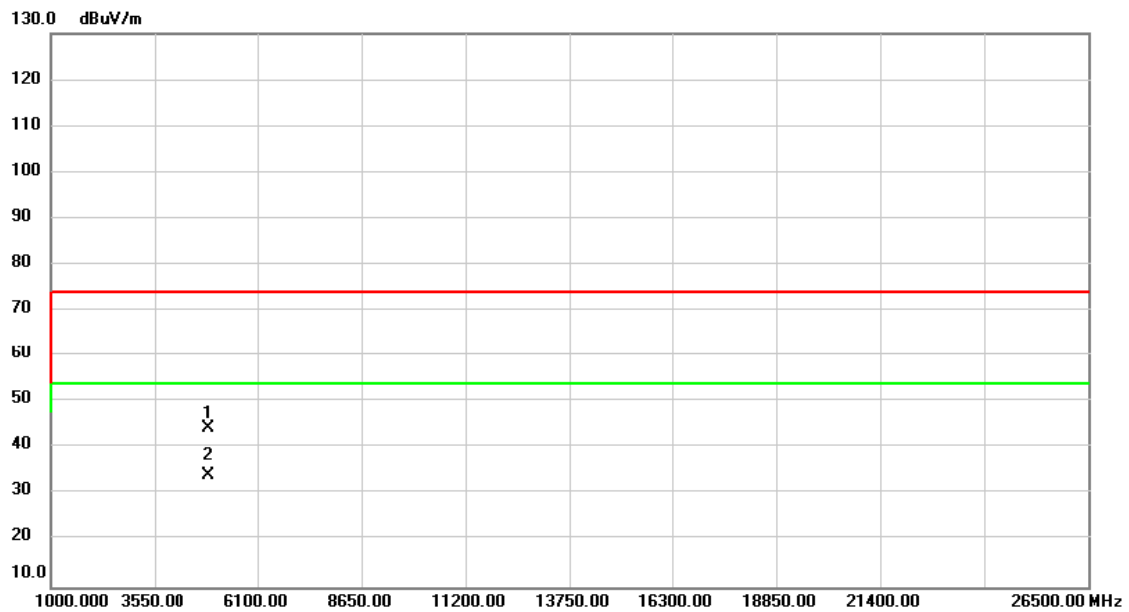


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4880.000	54.08	-9.77	44.31	74.00	-29.69	peak	
2	*	4880.000	44.05	-9.77	34.28	54.00	-19.72	AVG	

Test Mode	TX Mode 2440MHz _CH19_ 1Mbps	Polarization	Horizontal
-----------	------------------------------	--------------	------------

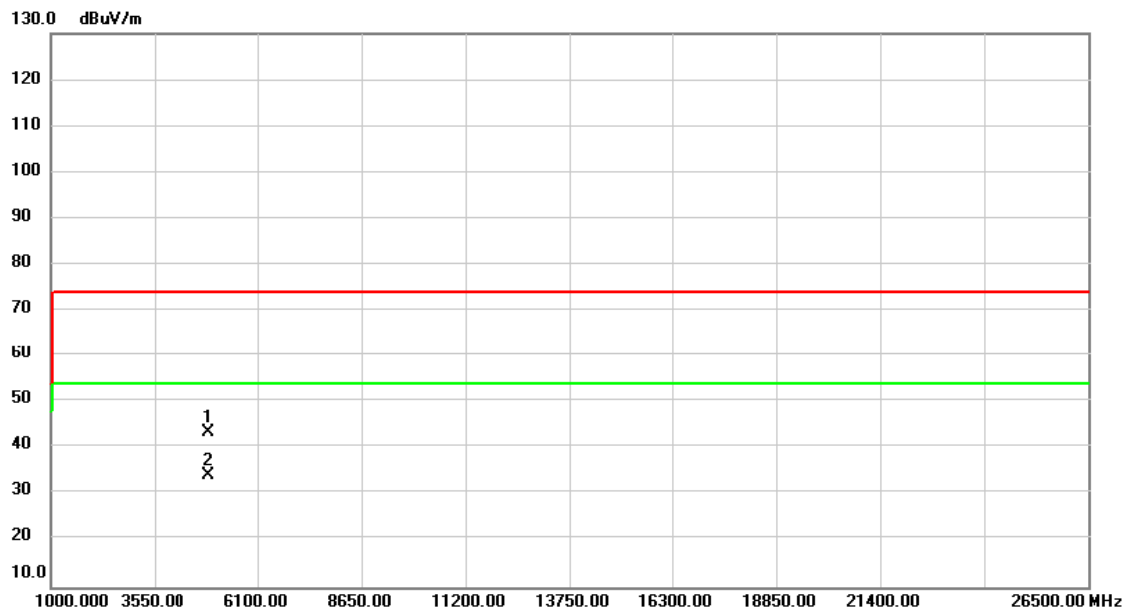


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	4880.000	53.10	-9.77	43.33	74.00	-30.67	peak	
2		4880.000	43.88	-9.77	34.11	74.00	-39.89	peak	

Test Mode	TX Mode 2480MHz _CH39_1Mbps	Polarization	Vertical
-----------	-----------------------------	--------------	----------

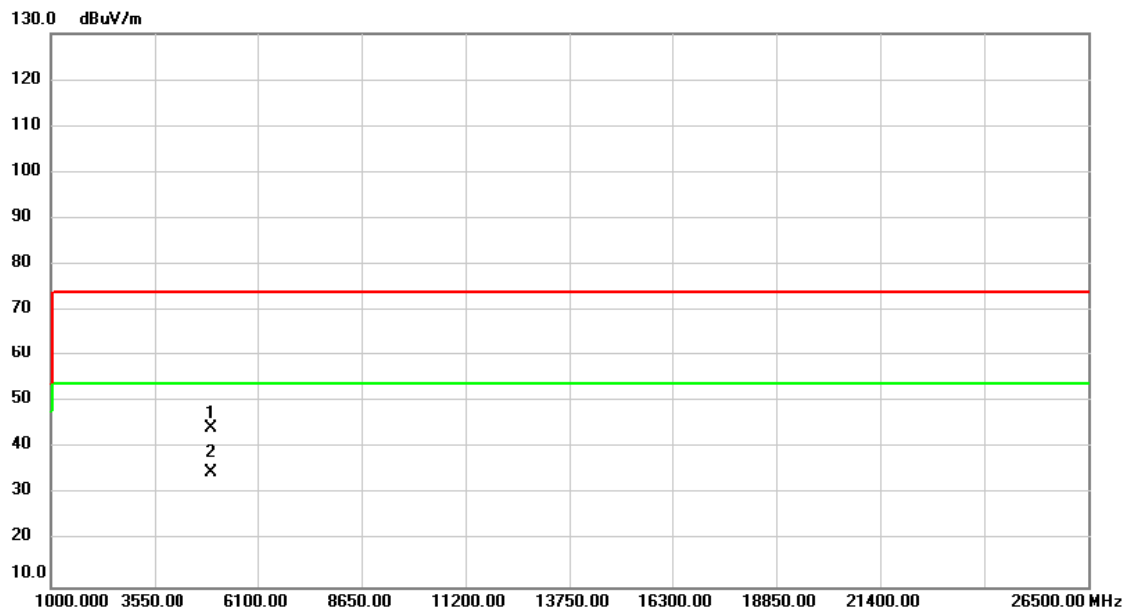

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4960.000	53.83	-9.49	44.34	74.00	-29.66	peak	
2	*	4960.000	44.32	-9.49	34.83	54.00	-19.17	AVG	

Test Mode	TX Mode 2480MHz _CH39_1Mbps	Polarization	Horizontal
-----------	-----------------------------	--------------	------------

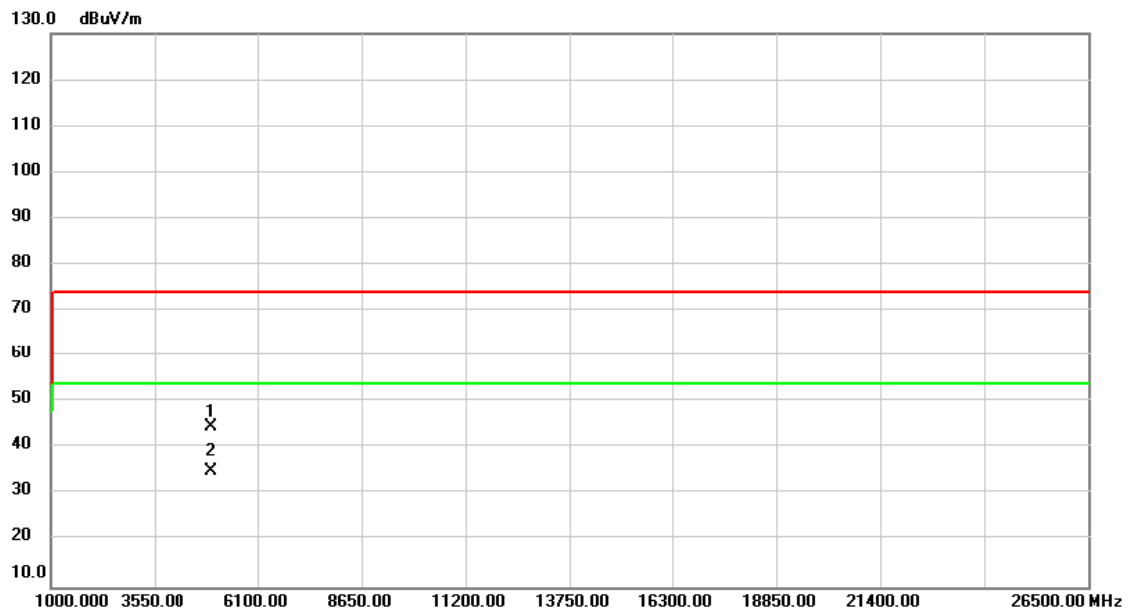


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4960.000	54.23	-9.49	44.74	74.00	-29.26	peak	
2	*	4960.000	44.66	-9.49	35.17	54.00	-18.83	AVG	

APPENDIX E - BANDWIDTH

Test Mode:	TX Mode
------------	---------

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2402	0.72	1.08	500	Pass
2440	0.72	1.08	500	Pass
2480	0.71	1.09	500	Pass

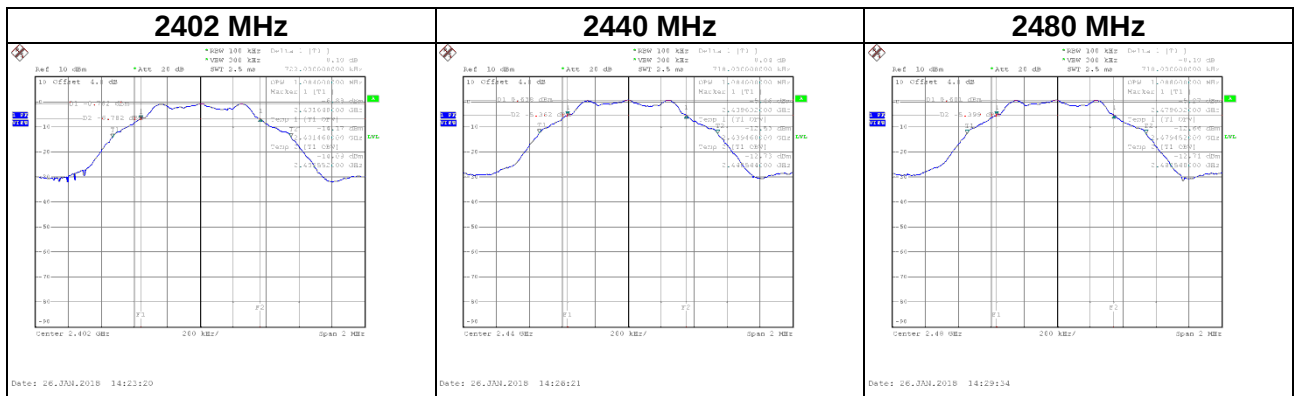

APPENDIX F - MAXIMUM OUTPUT POWER TEST

Test Mode :	TX Mode 2402MHz/2440MHz/2480MHz_1Mbps
-------------	---------------------------------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	0.47	0.0011	30.00	1.00	Pass
2440	1.53	0.0014	30.00	1.00	Pass
2480	1.74	0.0015	30.00	1.00	Pass


Spot check test:

Test Mode :	TX Mode 2402MHz/2440MHz/2480MHz_1Mbps
-------------	---------------------------------------

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	-0.34	0.0009	30.00	1.00	Pass
2440	0.82	0.0012	30.00	1.00	Pass
2480	1.24	0.0013	30.00	1.00	Pass

APPENDIX G - ANTENNA CONDUCTED SPURIOUS EMISSION


Test Mode : TX Mode 2402MHz/2440MHz/2480MHz_1Mbps

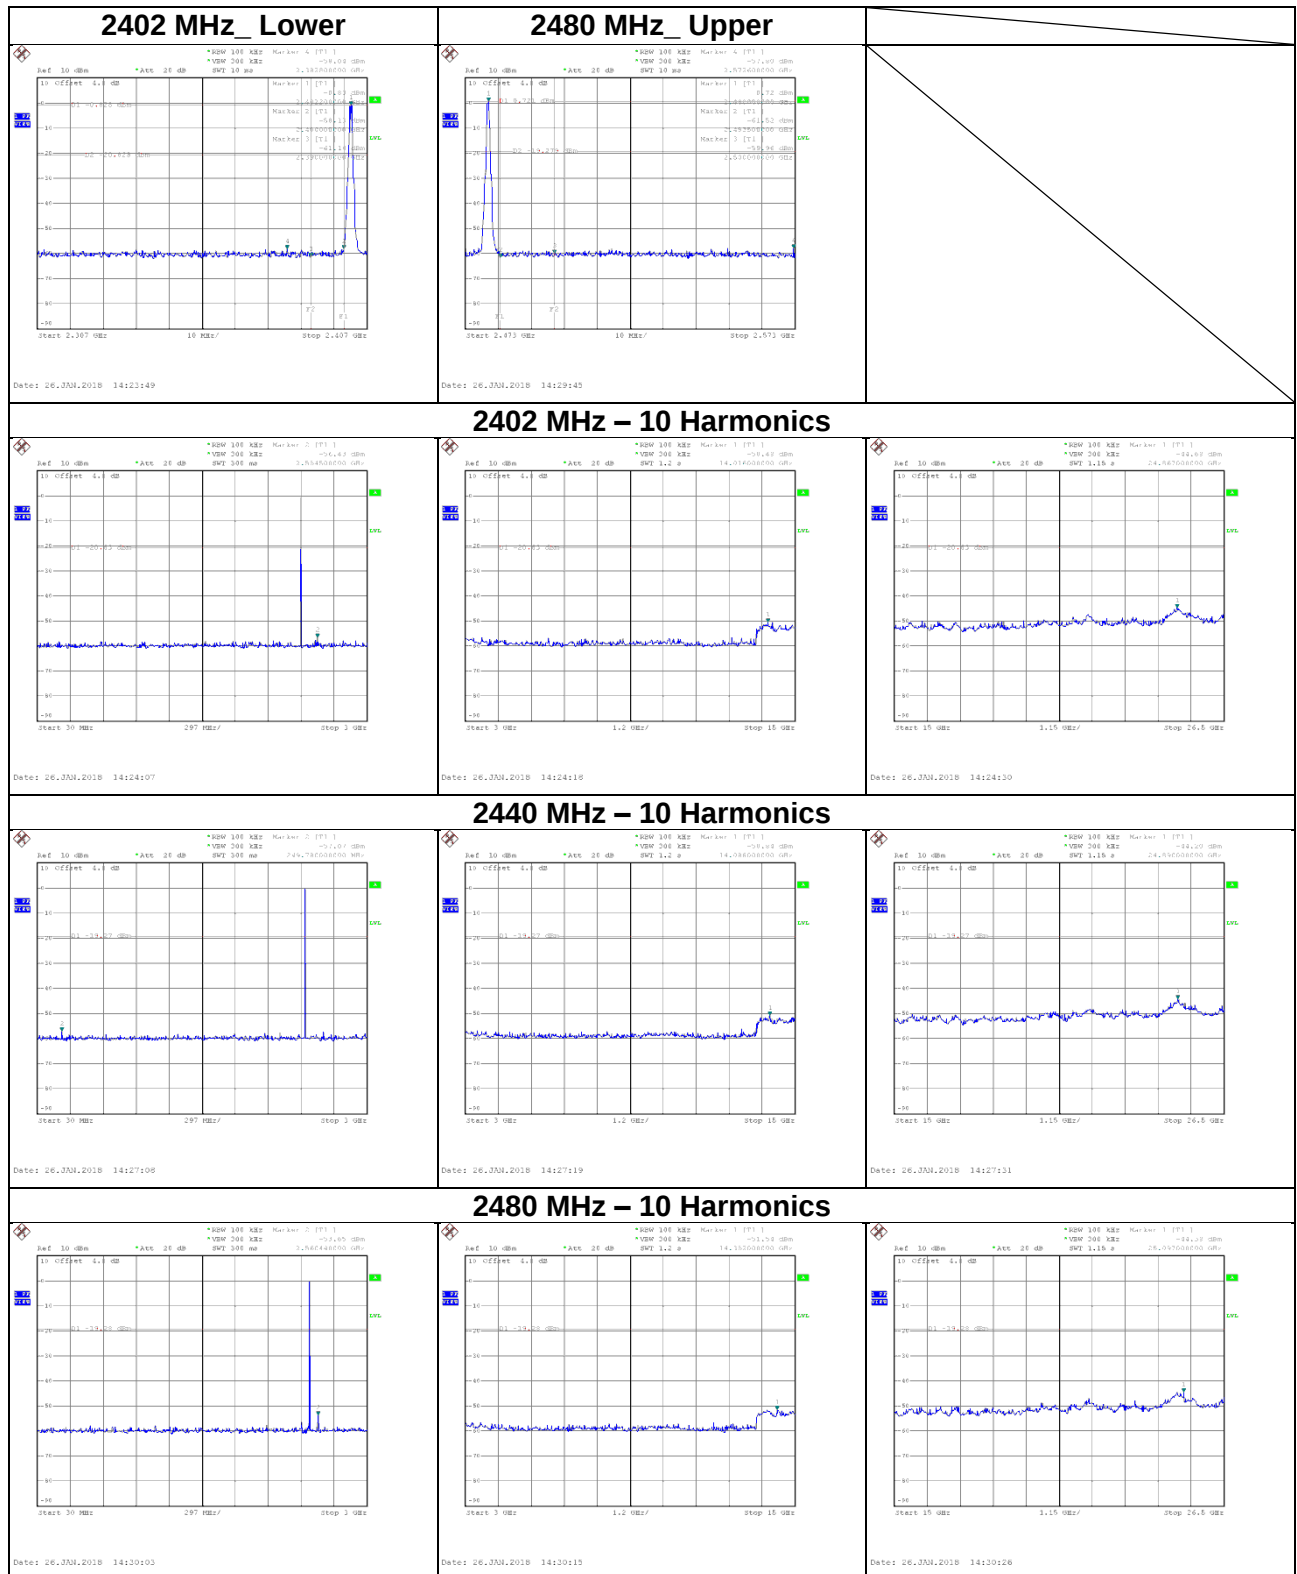

APPENDIX H - POWER SPECTRAL DENSITY TEST

Test Mode:	CH00, CH19 , CH39 - 1Mbps
------------	---------------------------

Frequency (MHz)	Power Density (dBm/3kHz)	Power Density (mW/3kHz)	Max. Limit (dBm/3kHz)	Test Result
2402	-14.56	0.015	8.00	Pass
2440	-13.29	0.017	8.00	Pass
2480	-13.30	0.018	8.00	Pass

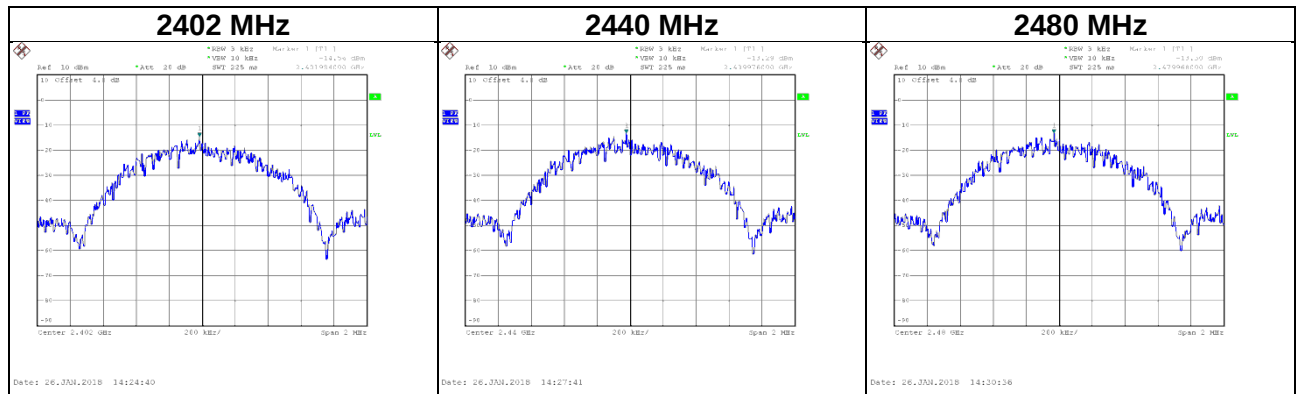

End of Test Report