

FCC Radio Test Report

FCC ID: M82-PWS872FL

Report No. : BTL-FCCP-4-2302T054B
Equipment : COMPUTER
Model Name : PWS-872FL, PWS-872FLXXXXXXXXXXXXXXXXXXXX (where X may be any alphanumeric character , blank or "-".)
Brand Name : Advantech
Applicant : Advantech Co., Ltd.
Address : No.1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei 11491, Taiwan.
Radio Function : RLAN 5 GHz (U-NII 1, U-NII 2a, U-NII 2c, U-NII 3)
FCC Rule Part(s) : FCC CFR Title 47, Part 15, Subpart E (15.407)
Measurement Procedure(s) : ANSI C63.10-2020
Date of Receipt : 2024/3/13
Date of Test : 2025/11/18 ~ 2025/12/30
Issued Date : 2026/1/12

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by

Brett Shen
Brett Shen, Engineer

Approved by

Jerry Chuang
Jerry Chuang, Vice Manager

**BTL Inc.**

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the Customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

1	SUMMARY OF TEST RESULTS	5
1.1	TEST FACILITY	6
1.2	MEASUREMENT UNCERTAINTY	6
1.3	TEST ENVIRONMENT CONDITIONS	6
1.4	TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	7
2	GENERAL INFORMATION	9
2.1	DESCRIPTION OF EUT	9
2.2	TEST MODES	13
2.3	BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	15
2.4	SUPPORT UNITS	16
3	AC POWER LINE CONDUCTED EMISSIONS TEST	17
3.1	LIMIT	17
3.2	TEST PROCEDURE	17
3.3	DEVIATION FROM TEST STANDARD	17
3.4	TEST SETUP	18
3.5	TEST RESULT	18
4	RADIATED EMISSIONS TEST	19
4.1	LIMIT	19
4.2	TEST PROCEDURE	20
4.3	DEVIATION FROM TEST STANDARD	20
4.4	TEST SETUP	21
4.5	EUT OPERATING CONDITIONS	22
4.6	TEST RESULT – 9KHZ TO 30 MHZ	22
4.7	TEST RESULT – 30 MHZ TO 1 GHZ	22
4.8	TEST RESULT – ABOVE 1 GHZ	22
5	OUTPUT POWER TEST	23
5.1	LIMIT	23
5.2	TEST PROCEDURE	23
5.3	DEVIATION FROM TEST STANDARD	23
5.4	TEST SETUP	23
5.5	EUT OPERATING CONDITIONS	23
5.6	TEST RESULT	23
6	LIST OF MEASURING EQUIPMENTS	24
7	EUT TEST PHOTO	25
8	EUT PHOTOS	25
APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS	26
APPENDIX B	RADIATED EMISSIONS - 9 KHZ TO 30 MHZ	29
APPENDIX C	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ	34
APPENDIX D	RADIATED EMISSIONS - ABOVE 1 GHZ	37
APPENDIX E	OUTPUT POWER	248

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-4-2302T054B	R00	Original Report.	2026/1/12	Valid

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

Standard(s) Section	Description	Test Result	Judgement	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	Pass	-----
15.205 15.209 15.407(b)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	Pass	-----
15.407(a)	Bandwidth	NOTE (3)	Pass	-----
15.407(a)	Output Power	APPENDIX E	Pass	-----
15.407(a)	Power Spectral Density	NOTE (3)	Pass	-----
15.407(c)	Automatically Discontinue Transmission	NOTE (3)	Pass	-----
15.407(h)	Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS)	NOTE (3)	Pass	-----
15.203	Antenna Requirement	-----	Pass	-----

Statement of Conformity

The statement of conformity is based on the binary decision rule according to IEC Guide 115 and ILAC G8 "simple acceptance" principle. Without considering measurement uncertainty, its specific risk is less than 50% PFA. (PFA: Probability of False Accept)

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.
- (3) This item is demonstrated to full compliance referring to the test report number 200611-03.TR01, 200611-03.TR02, 200611-03.TR03 and 200611-03.TR06 of the integrated module (model name: AX210NGW, FCC ID: PD9AX210NG), according to KDB 996369 D02 Q1 a) 2).
- (4) The radiated emissions are tested to demonstrate full compliance of both module integrated into the host and host itself.
- (5) The output power of integrated module have been reduced, therefore, the full output power tests are performed and recorded.

1.1 TEST FACILITY

The test locations stated below are under the TAF Accreditation Number 0659.

The test location(s) used to collect the test data in this report are:

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
(FCC DN: TW0659)

☐ C05 ☐ CB08 ☐ CB11 ☐ SR10 ☒ SR11

No. 64, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
(FCC DN: TW0659)

☒ C01 ☒ CB20

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**.

A. AC power line conducted emissions test:

Test Site	Measurement Frequency Range	U (dB)
C01	150 kHz ~ 30 MHz	3.44

B. Radiated emissions test:

Test Site	Measurement Frequency Range	U (dB)
CB20 (3m)	0.03 ~ 0.2 GHz	4.01
	0.2 ~ 1 GHz	4.64
	1 ~ 6 GHz	5.91
	6 ~ 18 GHz	6.24
	18 ~ 26 GHz	3.93
	26 ~ 40 GHz	4.06

C. Conducted test:

Test Item	U
Output power	0.8672 dB

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Environment Condition	Test Voltage	Tested by
AC Power Line Conducted Emissions	25 °C, 45 %	AC 120V	Benny Cao
Radiated emissions below 1 GHz	Refer to data	AC 120V	Benny Cao
Radiated emissions above 1 GHz	Refer to data	AC 120V	Benny Cao
Output Power	25 °C, 55 %	AC 120V	Easton Tsai

1.4 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

Test Software Version	DRTU
-----------------------	------

For SISO Mode Ant. A:

UNII-1			
Mode	5180 MHz	5200 MHz	5240 MHz
IEEE 802.11a	14	14	14

UNII-2A			
Mode	5260 MHz	5280 MHz	5320 MHz
IEEE 802.11a	14	14	14

UNII-2C			
Mode	5500 MHz	5600 MHz	5700 MHz
IEEE 802.11a	13.50	13.50	13.50

UNII-3			
Mode	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a	14.00	13.50	13.50

For SISO Mode Ant. B:

UNII-1			
Mode	5180 MHz	5200 MHz	5240 MHz
IEEE 802.11a	13.5	13.5	13.5

UNII-2A			
Mode	5260 MHz	5280 MHz	5320 MHz
IEEE 802.11a	13.5	13.5	13.5

UNII-2C			
Mode	5500 MHz	5600 MHz	5700 MHz
IEEE 802.11a	14.25	14.25	14.25

UNII-3			
Mode	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a	14.25	14.25	14.25

For MIMO Mode:

UNII-1			
Mode	5180 MHz	5200 MHz	5240 MHz
IEEE 802.11n (HT20)	13/13	13/13	12.75/12.75
IEEE 802.11ax (HE20)	13/13	13/13	13/13
Mode	5190 MHz	5230 MHz	
IEEE 802.11n (HT40)	13.25/13	12.5/12.5	
IEEE 802.11ax (HE40)	13.5/13.25	12.5/12.5	
Mode	5210 MHz		
IEEE 802.11ac (VHT80)	13.25/13		
IEEE 802.11ax (HE80)	12.5/12.5		
Mode	5250 MHz		
IEEE 802.11ac (VHT160)	13/12.75		
IEEE 802.11ax (HE160)	13/12.75		

UNII-2A			
Mode	5260 MHz	5280 MHz	5320 MHz
IEEE 802.11n (HT20)	14/13.5	14/13.5	14/13.5
IEEE 802.11ax (HE20)	14/13.5	13.75/13.5	13.75/13.5
Mode	5270 MHz	5310 MHz	
IEEE 802.11n (HT40)	13.25/13	13.25/13	
IEEE 802.11ax (HE40)	13.75/13	13.75/13	
Mode	5290 MHz		
IEEE 802.11ac (VHT80)	13.25/13		
IEEE 802.11ax (HE80)	13.5/13.25		

UNII-2C				
Mode	5500 MHz	5600 MHz	5700 MHz	5720 MHz
IEEE 802.11n (HT20)	13.5/14.25	13.5/14.25	13.5/14.25	13.5/14.25
IEEE 802.11ax (HE20)	13.5/14	13.5/14	13.5/14.5	13.5/14.5
Mode	5510 MHz	5590 MHz	5670 MHz	5710 MHz
IEEE 802.11n (HT40)	13/13.75	13/13.75	13/13.75	13/13.75
IEEE 802.11ax (HE40)	13/13.75	13/13.75	13/13.75	13/13.75
Mode	5530 MHz	5610 MHz	5690 MHz	
IEEE 802.11ac (VHT80)	13/13.5	13/13.5	13/13.5	
IEEE 802.11ax (HE80)	13.25/13.75	13.25/13.75	13.25/13.75	
Mode	5570 MHz			
IEEE 802.11ac (VHT160)	12.75/13.5			
IEEE 802.11ax (HE160)	12.75/13.5			

UNII-3			
Mode	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11n (HT20)	14/14.75	13.5/14.25	13.5/14.25
IEEE 802.11ax (HE20)	13.75/14.5	13.5/14.25	13.5/14.25
Mode	5755 MHz	5795 MHz	
IEEE 802.11n (HT40)	13/13.75	13/13.75	
IEEE 802.11ax (HE40)	13.25/14	13.25/14	
Mode	5775 MHz		
IEEE 802.11ac (VHT80)	13/13.5		
IEEE 802.11ax (HE80)	13.25/13.75		

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	COMPUTER
Model Name	PWS-872FLXXXXXXXXXXXXXXXXXX (where X may be any alphanumeric character , blank or "-".)
Brand Name	Advantech
Model Difference	Different models distribute to different area.
Power Source	DC voltage supplied from AC/DC Adapter
Power Rating	EUT: 19VDC, 3.42A For Adapter: I/P: 100-240V~ 1.5A 50-60Hz O/P: 19.0V ---3.42A
Products Covered	1 * CPU: Intel / i3-7100U 2.4GHz 1 * Memory: DDR4 2133MHz(4GB) 1 * Mother Board: Advantech / PWS-872 1 * 10.1" LCD Display: Jetone / J101WUXG01 1 * SSD: Advantech / SQF-SMSZ2-64GCSBE / 64GB 1 * WLAN+BT: INTEL / AX210NGW 1 * Adapter: Delta / ADP-65JH HB 1 * Desk docking station (Optional): Advantech / PWS-870 Desk Docking 1 * Vehicle docking station (Optional): Advantech / PWS-870 Vehicle Docking 1 * I/O Extension (Optional): Advantech / PWS-870-EXT100E 1 * MSR and Smart Card Reader Extension (Optional): Advantech / PWS-870-EXT300E
WIFI+BT Module	Intel® Wi-Fi 6E AX210 / AX210NGW
Operation Band	UNII-1: 5150 MHz to 5250 MHz UNII-2A: 5250 MHz to 5350 MHz UNII-2C: 5470 MHz to 5725 MHz UNII-3: 5725 MHz to 5850 MHz
Operation Frequency	UNII-1: 5180 MHz to 5240 MHz UNII-2A: 5260 MHz to 5320 MHz UNII-2C: 5500 MHz to 5720 MHz UNII-3: 5720 MHz to 5825 MHz
Maximum Output Power for UNII-1_SISO mode	IEEE 802.11a_Ant. A: 13.90 dBm (0.0245 W) IEEE 802.11a_Ant. B: 13.36 dBm (0.0217 W)
Maximum Output Power for UNII-2A_SISO mode	IEEE 802.11a_Ant. A: 13.93 dBm (0.0247 W) IEEE 802.11a_Ant. B: 13.43 dBm (0.0220 W)
Maximum Output Power for UNII-2C_SISO mode	IEEE 802.11a_Ant. A: 13.28 dBm (0.0213 W) IEEE 802.11a_Ant. B: 13.76 dBm (0.0238 W)
Maximum Output Power for UNII-3_SISO mode	IEEE 802.11a_Ant. A: 13.39 dBm (0.0218 W) IEEE 802.11a_Ant. B: 13.73 dBm (0.0236 W)
Maximum Output Power for UNII-1_MIMO mode	IEEE 802.11n (HT20): 15.87 dBm (0.0386 W) IEEE 802.11n (HT40): 16.53 dBm (0.0450 W) IEEE 802.11ac (VHT80): 16.53 dBm (0.0450 W) IEEE 802.11ac (VHT160): 16.55 dBm (0.0452 W) IEEE 802.11ax (HE20): 16.00 dBm (0.0398 W) IEEE 802.11ax (HE40): 16.50 dBm (0.0447 W) IEEE 802.11ax (HE80): 15.69 dBm (0.0371 W) IEEE 802.11ax (HE160): 16.50 dBm (0.0446 W)
Maximum Output Power for UNII-2A_MIMO mode	IEEE 802.11n (HT20): 16.60 dBm (0.0457 W) IEEE 802.11n (HT40): 16.45 dBm (0.0442 W) IEEE 802.11ac (VHT80): 16.60 dBm (0.0458 W) IEEE 802.11ax (HE20): 16.56 dBm (0.0453 W) IEEE 802.11ax (HE40): 16.56 dBm (0.0453 W) IEEE 802.11ax (HE80): 16.54 dBm (0.0451 W)

Maximum Output Power for UNII-2C_ MIMO mode	IEEE 802.11n (HT20): 16.53 dBm (0.0450 W) IEEE 802.11n (HT40): 16.57 dBm (0.0454 W) IEEE 802.11ac (VHT80): 16.66 dBm (0.0464 W) IEEE 802.11ac (VHT160): 16.53 dBm (0.0450 W) IEEE 802.11ax (HE20): 16.59 dBm (0.0456 W) IEEE 802.11ax (HE40): 16.50 dBm (0.0447 W) IEEE 802.11ax (HE80): 16.58 dBm (0.0455 W) IEEE 802.11ax (HE160): 16.50 dBm (0.0447 W)
Maximum Output Power for UNII-3_ MIMO mode	IEEE 802.11n (HT20): 16.57 dBm (0.0454 W) IEEE 802.11n (HT40): 16.52 dBm (0.0448 W) IEEE 802.11ac (VHT80): 16.51 dBm (0.0448 W) IEEE 802.11ax (HE20): 16.55 dBm (0.0452 W) IEEE 802.11ax (HE40): 16.49 dBm (0.0445 W) IEEE 802.11ax (HE80): 16.54 dBm (0.0451 W)
Maximum Output Power for Straddle Channel	IEEE 802.11n (HT20): 16.61 dBm (0.0459 W) IEEE 802.11n (HT40): 16.67 dBm (0.0465 W) IEEE 802.11ac (VHT80): 16.62 dBm (0.0459 W) IEEE 802.11ax (HE20): 16.69 dBm (0.0466 W) IEEE 802.11ax (HE40): 16.54 dBm (0.0451 W) IEEE 802.11ax (HE80): 16.56 dBm (0.0453 W)
Test Model	PWS-872FL
Sample Status	Engineering Sample
EUT Modification(s)	N/A

NOTE:

(1) The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

(2) Channel List:

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HE20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HE40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HE20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HE40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HE20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HE40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590	138	5690
112	5560	126	5630		
116	5580	134	5670		
120	5600	142	5710		
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				
144**	5720				

** : IEEE 802.11a not supported 5720MHz.

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HE20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HE40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
144	5720	142	5710	138	5690
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

** : IEEE 802.11a not supported 5720MHz.

802.11ac (VHT160) 802.11ax (HE160)	
Channel	Frequency (MHz)
50	5250
114	5570

(3) Table for Filed Antenna:

Antenna	Manufacture	Part Number	Type	Connector	Frequency Range (MHz)	Gain (dBi)
Ant. A		AJDP1J-B0103	PIFA	I-PEX_IV	2400-2483.5	2.55
					5150-5250	3.54
					5250-5350	3.54
					5470-5725	3.13
					5725-5850	2.2
Ant. B		AJDP1J-C0058	PIFA	I-PEX_IV	2400-2483.5	1.66
					5150-5250	1.02
					5250-5350	1.02
					5470-5725	1.37
					5725-5850	1.29

Note:

- (1) Antenna gain higher within the operation frequency range is used for testing.
- (2) The EUT incorporates a SISO and MIMO function. Physically, the EUT provides one/two completed transmitters and receivers (1T1R/2T2R).
- (3) For SISO mode,
The maximum antenna gain is 3.54 dBi < 6 dBi.
The Direction gain is less than 6 dBi, so output power limits will not be reduced.
- (4) For MIMO mode,
To UNII-1,
The Directional Gain = $10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20})^2 / N_{ANT}] = 5.38 \text{ dBi} < 6\text{dBi}$.
To UNII-2A,
The Directional Gain = $10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20})^2 / N_{ANT}] = 5.38 \text{ dBi} < 6\text{dBi}$.
To UNII-2C,
The Directional Gain = $10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20})^2 / N_{ANT}] = 5.30 \text{ dBi} < 6\text{dBi}$.
To UNII-3,
The Directional Gain = $10\log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20})^2 / N_{ANT}] = 4.77 \text{ dBi} < 6\text{dBi}$.
All Direction gain is less than 6 dBi, so output power limits will not be reduced.

- (4) The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

2.2 TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal	-	-
Transmitter Radiated Emissions (below 1GHz)	IEEE 802.11a	36	-
Transmitter Radiated Emissions (above 1GHz)	IEEE 802.11a	36/48, 52/64 100/140, 149/165	Bandedge
	IEEE 802.11n (HT20) IEEE 802.11ax (HE20)	36/48, 52/64 100/140/144, 149/165	
	IEEE 802.11n (HT40) IEEE 802.11ax (HE40)	38/46, 54/62 102/134/142, 151/159	
	IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	42, 58 106/122/138, 155	
	IEEE 802.11ac (VHT160) IEEE 802.11ax (HE160)	50 114	
	IEEE 802.11a	36/40/48 52/60/64 100/120/140 149/157/165	Harmonic
	IEEE 802.11n (HT20) IEEE 802.11ax (HE20)	36/40/48 52/60/64 100/120/140/144 149/157/165	
	IEEE 802.11n (HT40) IEEE 802.11ax (HE40)	38/46, 54/62 102/118/134/142 151/159	
	IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	42, 58 106/122/138 155	
	IEEE 802.11ac (VHT160) IEEE 802.11ax (HE160)	50 114	
Transmitter Radiated Emissions (above 18GHz)	IEEE 802.11a	36	-
Output Power	IEEE 802.11a	36/40/48 52/60/64 100/120/140 149/157/165	-
	IEEE 802.11n (HT20) IEEE 802.11ax (HE20)	36/40/48 52/60/64 100/120/140/144 144/149/157/165	
	IEEE 802.11n (HT40) IEEE 802.11ax (HE40)	38/46, 54/62 102/118/134/142 142/151/159	
	IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	42, 58 106/122/138 138/155	
	IEEE 802.11ac (VHT160) IEEE 802.11ax (HE160)	50 114	


NOTE:

- (1) The Radiated emissions test was verified based on the worst conducted power and Bandwidth test results reported in the original report.
- (2) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Horizontal) is recorded.
- (3) All X, Y and Z axes are evaluated, but only the worst case (Y axis) is recorded.
- (4) IEEE 802.11n (HT20) & IEEE 802.11n (HT40) mode is worse than IEEE 802.11ac (VHT20) & IEEE 802.11ac (VHT 40) mode, so we select IEEE 802.11n (HT20) & IEEE 802.11n (HT40) mode for the test.
- (5) For IEEE 802.11ax modes, refer to TCB Workshop presentations on October 3, 2018, after evaluated, all testing are performed under fully loaded conditions (Full RU). In the test data, only the partially loaded conditions data are marked with tones.


2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

AC Power Line Conducted Emissions Test

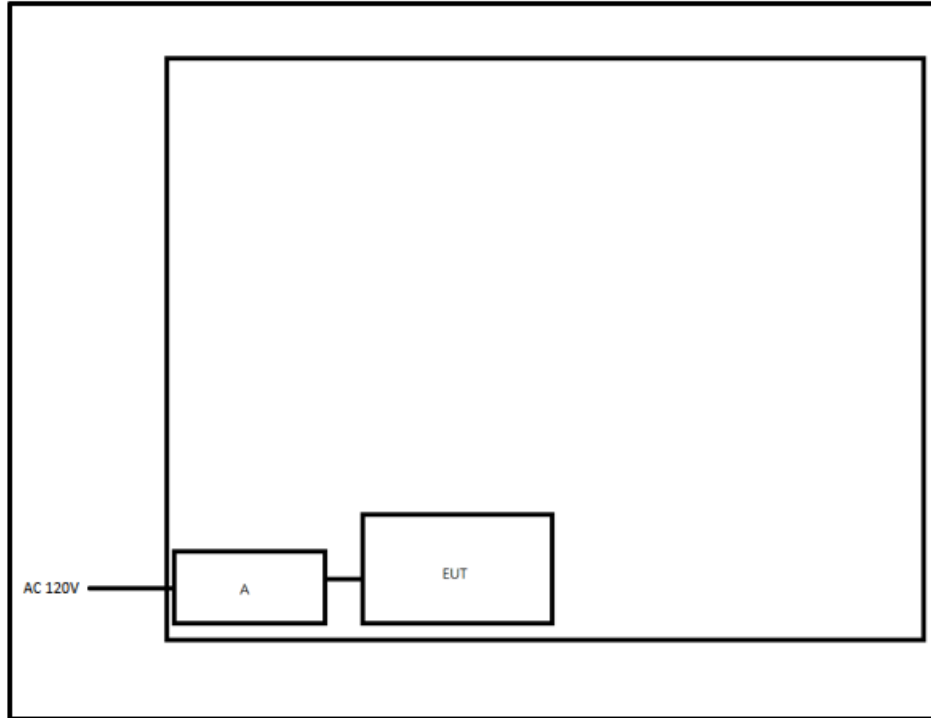

Radiated Emissions Test

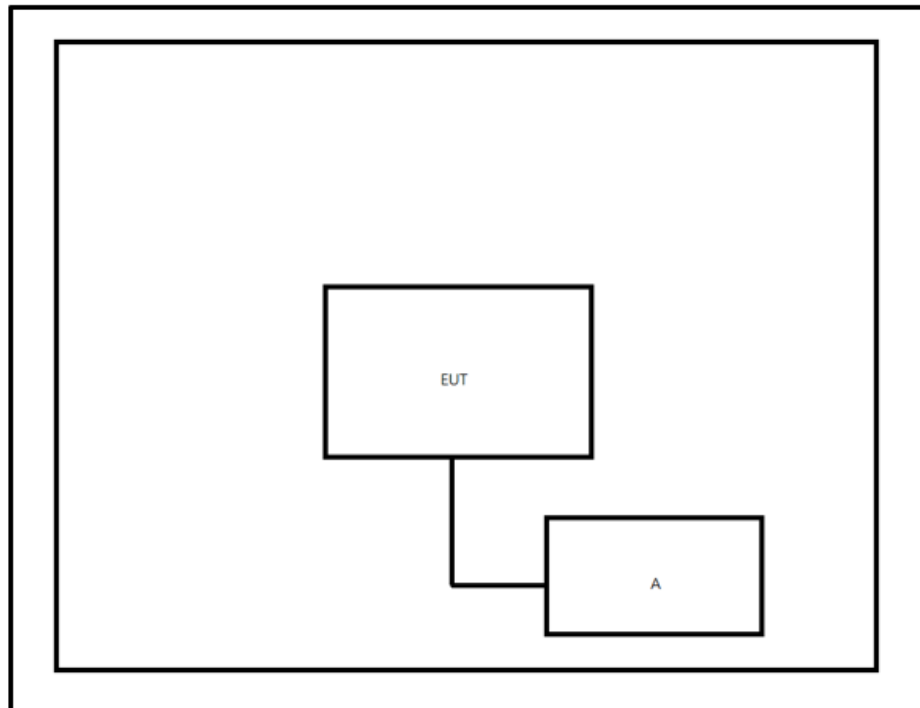

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	Adapter	Delta Electronics, Inc.	ADP-65JH HB	6KWW0BL00.X	Supplied by test requester

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
-	-	-	-	-	-

3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value
 Calculation example:

Reading Level (dBμV)		Correct Factor (dB)		Measurement Value (dBμV)
38.22	+	3.45	=	41.67

Measurement Value (dBμV)		Limit Value (dBμV)		Margin Level (dB)
41.67	-	60	=	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
 All other support equipment were powered from an additional LISN(s).
 The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
 The end of the cable will be terminated, using the correct terminating impedance.
 The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.


NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
 BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

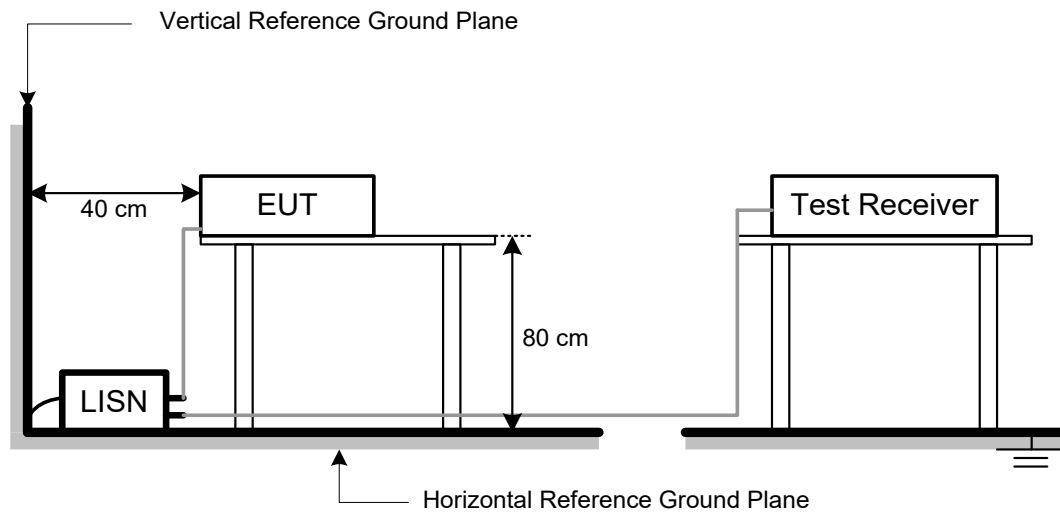

3.5 TEST RESULT

Please refer to the APPENDIX A.

4 RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205, then the 15.209 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
5725-5850	-27 (NOTE 2)	68.3
	10 (NOTE 2)	105.3
	15.6 (NOTE 2)	110.9
	27 (NOTE 2)	122.3

NOTE:

- (1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

- (2) According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level (dBμV)		Correct Factor (dB/m)		Measurement Value (dBμV/m)
19.11	+	2.11	=	21.22

Measurement Value (dBμV/m)		Limit Value (dBμV/m)		Margin Level (dB)
21.22	-	68.3	=	-47.08

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector



4.2 TEST PROCEDURE


- The measuring distance of 1 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 30MHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.

4.3 DEVIATION FROM TEST STANDARD

No deviation.

4.4 TEST SETUP

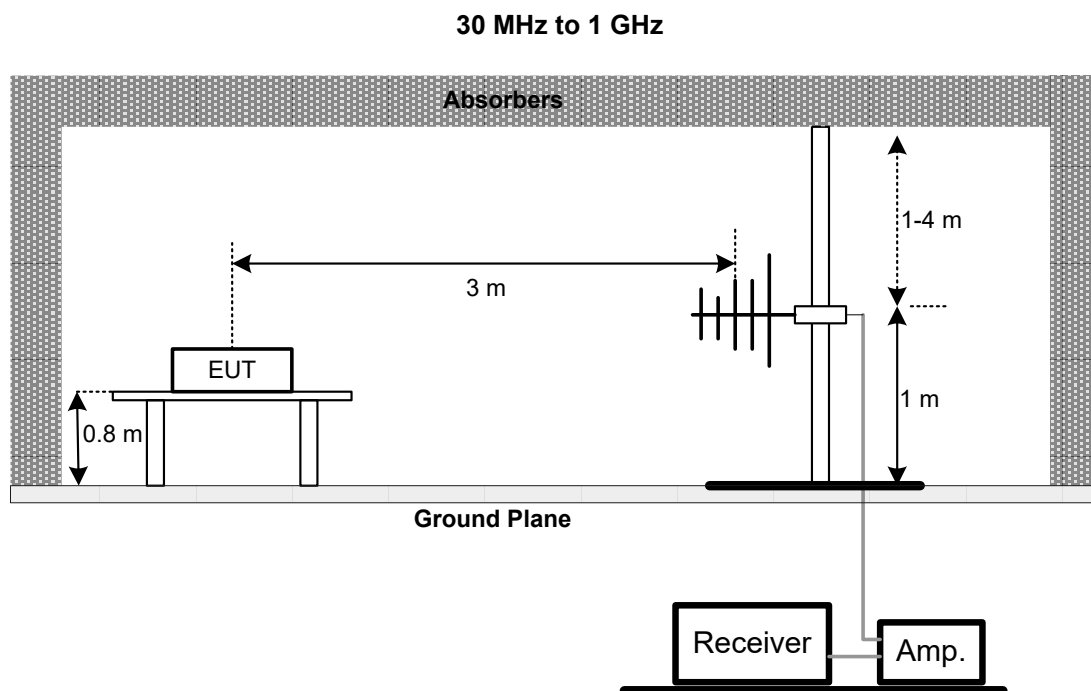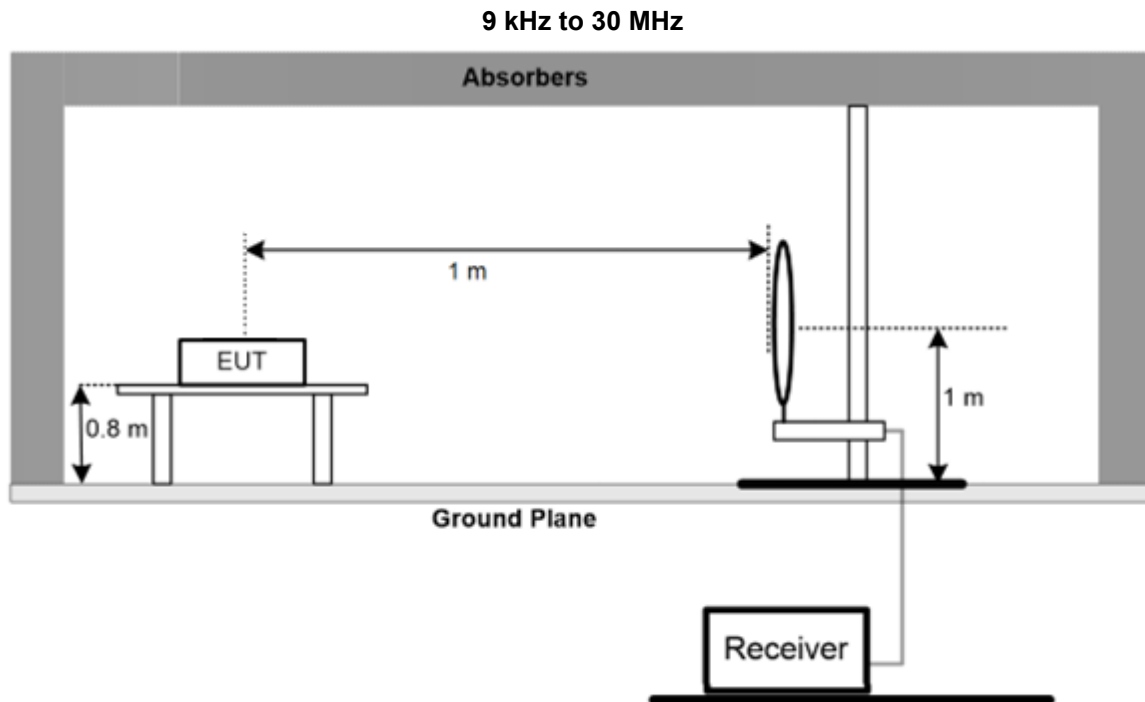

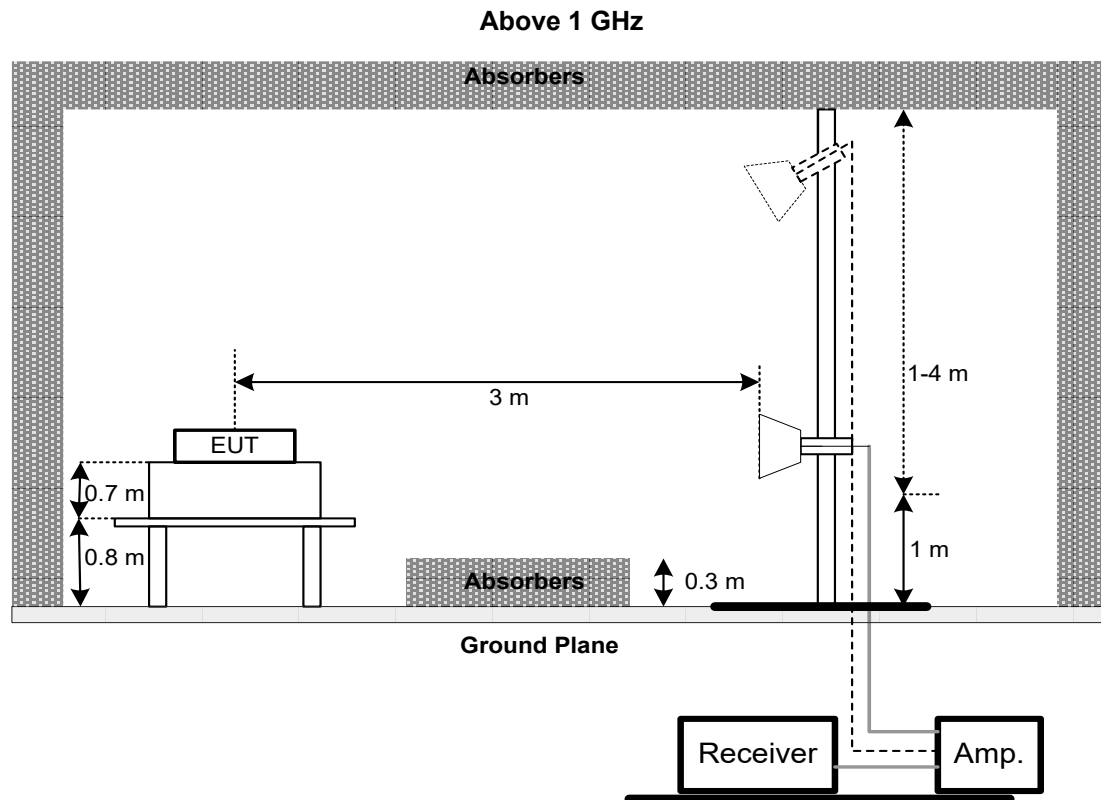

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

NOTE:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6 TEST RESULT – 9kHz TO 30 MHz

Please refer to the APPENDIX B.

4.7 TEST RESULT – 30 MHz TO 1 GHz

Please refer to the APPENDIX C.

4.8 TEST RESULT – ABOVE 1 GHz

Please refer to the APPENDIX D.

NOTE:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5 OUTPUT POWER TEST

5.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Maximum Output Power	Fixed:1 Watt (30 dBm) Mobile and portable: 250 mW (23.98 dBm)	5150-5250
		250 mW (23.98 dBm)	5250-5350
		1 Watt (30dBm)	5470-5725
			5725-5850

Note: The maximum e.i.r.p at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW(21 dBm).


5.2 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- The maximum peak conducted output power was performed in accordance with method of clause E. 3. a) FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
 - Method PM (Measurement using an RF average power meter):
 - Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied
The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
 - If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in II.B.
 - Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25%).

5.3 DEVIATION FROM TEST STANDARD

No deviation.

5.4 TEST SETUP

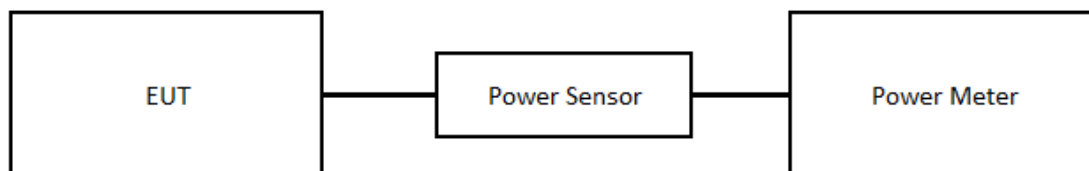

5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULT

Please refer to the APPENDIX E.

6 LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	EMC Receiver	keysight	N9038A	MY54130009	2025/06/25	2026/06/24
2	Test Cable	EMCI	EMCRG58-BM-B M-9000	210501	2025/12/02	2026/12/01
3	Two-Line V-Network	R&S	ENV216	101051	2025/07/02	2026/07/01
4	Measurement Software	Farad	EZ_EMC (Version NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Pre-Amplifier	EMCI	EMC184045SE	980512	2025/12/02	2026/12/01
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	340	2025/06/25	2026/06/24
3	Test Cable	EMCI	EMC102-KM-KM- 1000	220328	2025/12/02	2026/12/01
4	Test Cable	EMCI	EMC102-KM-KM- 3000	220330	2025/12/02	2026/12/01
5	Broad-Band Horn Antenna	RFSPIN	DRH18-E	210109A18E	2025/01/14	2026/01/13
6	Pre-Amplifier	EMCI	EMC118A45SE	981030	2025/12/02	2026/12/01
7	Test Cable	EMCI	EMC102-KM-KM- 1000	210119	2025/12/02	2026/12/01
8	Test Cable	EMCI	EMC102-KM-KM- 3000	210118	2025/12/02	2026/12/01
9	Test Cable	EMCI	EMC107-SM-SM- 6000	230726	2025/12/02	2026/12/01
10	EXA Spectrum Analyzer	keysight	N9020B	MY59050137	2025/12/1	2026/11/30
11	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	364	2025/04/08	2026/04/07
12	Pre-Amplifier	EMCI	EMC001330	980807	2025/12/02	2026/12/01
13	Test Cable	EMCI	EMC-8D-NM-NM- -5000	150106	2025/12/02	2026/12/01
14	Test Cable	EMCI	EMC-CFD-400-N M-NM-3300	200348	2025/12/02	2026/12/01
15	Test Cable	EMCI	EMC-CFD-400-N M-NM-8000	200343	2025/12/02	2026/12/01
16	Loop Antenna	Electro-Metrics	EMCI-LPA600	274	2025/07/10	2026/07/09
17	Pre-Amplifier	EMCI	EMC001340	980555	2025/11/30	2026/11/29
18	Measurement Software	Farad	EZ_EMC (Ver. NB-03A1-01)	N/A	N/A	N/A

Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Single Channel Pk Power Meter	Keysight	N1911A	MY63450010	2025/9/16	2026/9/15
2	Peak and Average Power Sensor	Keysight	E9327	MY63310007	2025/9/16	2026/9/15

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

7 EUT TEST PHOTO


Please refer to document Appendix No.: TP-2302T054B-FCCP-1 (APPENDIX-TEST PHOTOS).

8 EUT PHOTOS

Please refer to document Appendix No.: EP-2302T054B-1 (APPENDIX-EUT PHOTOS).

APPENDIX A AC POWER LINE CONDUCTED EMISSIONS

Test Mode	Normal	Tested Date	2025/12/30
Test Frequency	-	Phase	Line

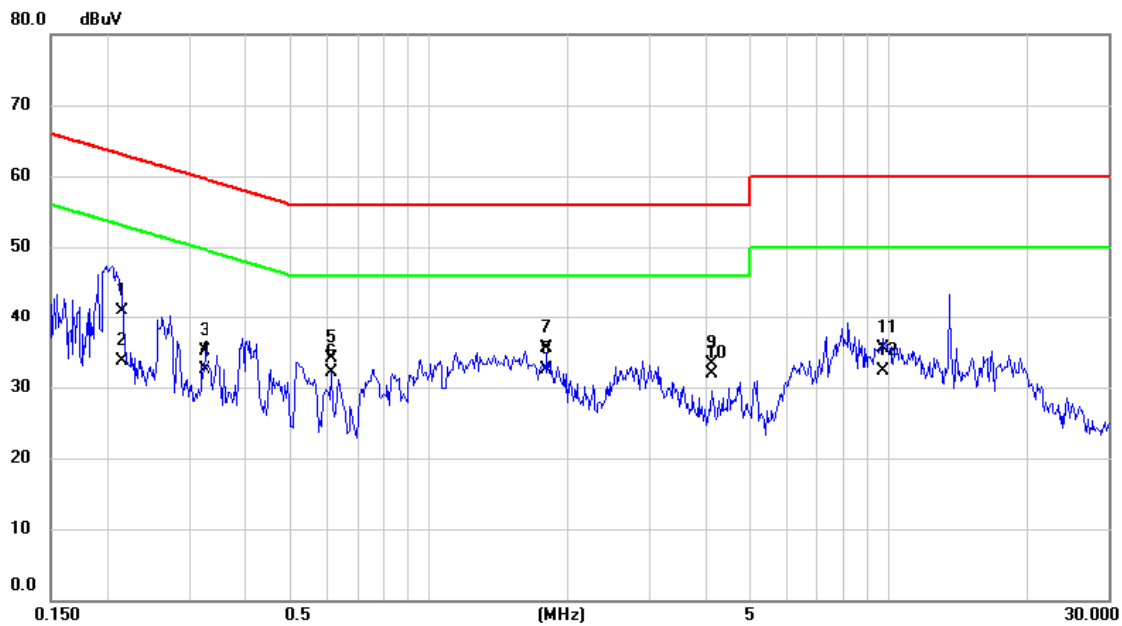


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2140	31.33	9.51	40.84	63.05	-22.21	QP	
2		0.2140	24.10	9.51	33.61	53.05	-19.44	AVG	
3		0.3240	25.57	9.52	35.09	59.60	-24.51	QP	
4		0.3240	22.93	9.52	32.45	49.60	-17.15	AVG	
5		0.6125	24.47	9.55	34.02	56.00	-21.98	QP	
6		0.6125	22.59	9.55	32.14	46.00	-13.86	AVG	
7		1.8005	25.76	9.69	35.45	56.00	-20.55	QP	
8	*	1.8005	22.89	9.69	32.58	46.00	-13.42	AVG	
9		4.1135	23.59	9.74	33.33	56.00	-22.67	QP	
10		4.1135	22.26	9.74	32.00	46.00	-14.00	AVG	
11		9.7500	25.56	9.88	35.44	60.00	-24.56	QP	
12		9.7500	22.50	9.88	32.38	50.00	-17.62	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2025/12/30
Test Frequency	-	Phase	Neutral

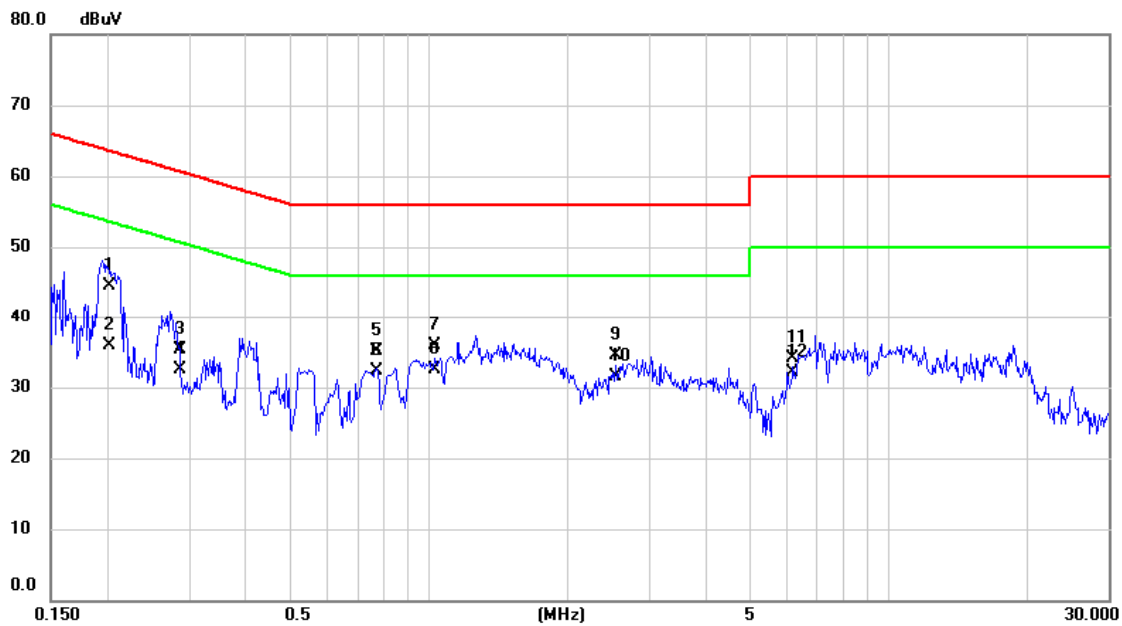

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2004	35.04	9.56	44.60	63.59	-18.99	QP	
2		0.2004	26.32	9.56	35.88	53.59	-17.71	AVG	
3		0.2858	25.64	9.57	35.21	60.65	-25.44	QP	
4		0.2858	23.00	9.57	32.57	50.65	-18.08	AVG	
5		0.7700	25.47	9.61	35.08	56.00	-20.92	QP	
6		0.7700	22.69	9.61	32.30	46.00	-13.70	AVG	
7		1.0310	26.20	9.64	35.84	56.00	-20.16	QP	
8	*	1.0310	22.95	9.64	32.59	46.00	-13.41	AVG	
9		2.5430	24.73	9.72	34.45	56.00	-21.55	QP	
10		2.5430	21.87	9.72	31.59	46.00	-14.41	AVG	
11		6.2000	24.35	9.82	34.17	60.00	-25.83	QP	
12		6.2000	22.24	9.82	32.06	50.00	-17.94	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX B RADIATED EMISSIONS - 9 KHZ TO 30 MHZ

Test Mode	IEEE 802.11a	Test Date	2025/12/30
Test Frequency	5180MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

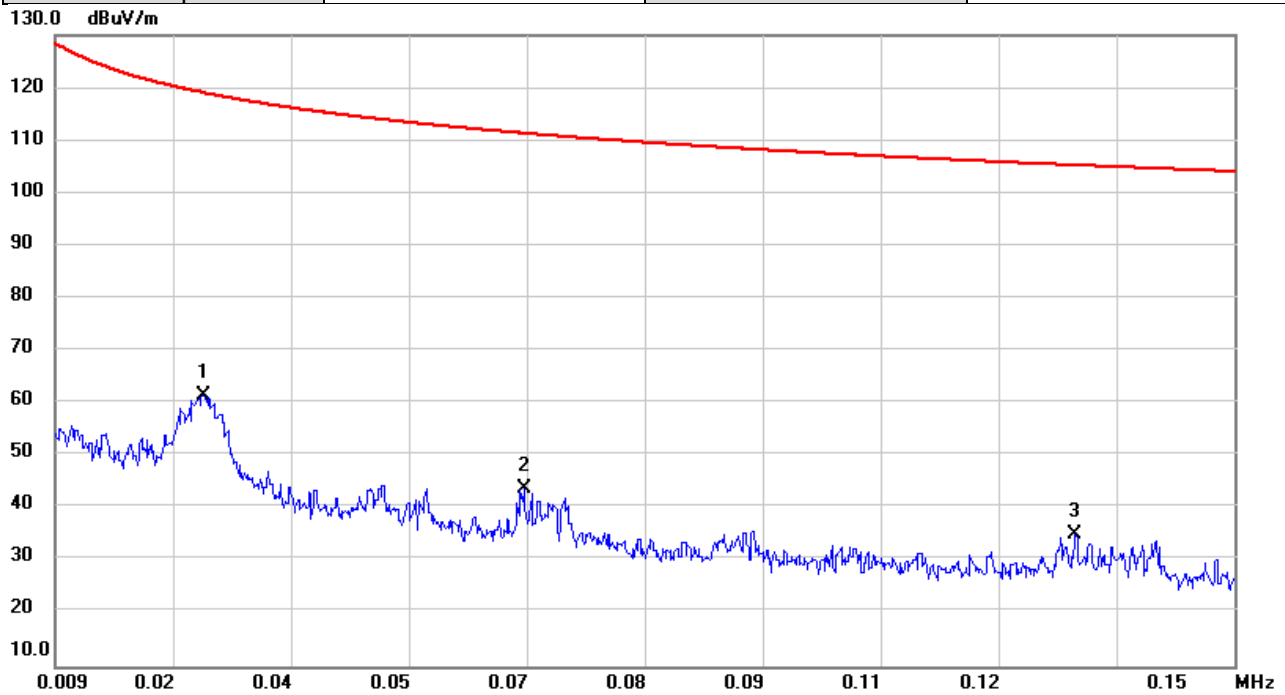


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0267	32.91	28.62	61.53	119.07	-57.54	AVG	
2		0.0652	23.64	20.10	43.74	111.32	-67.58	AVG	
3		0.1310	21.24	13.93	35.17	105.26	-70.09	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/30
Test Frequency	5180MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

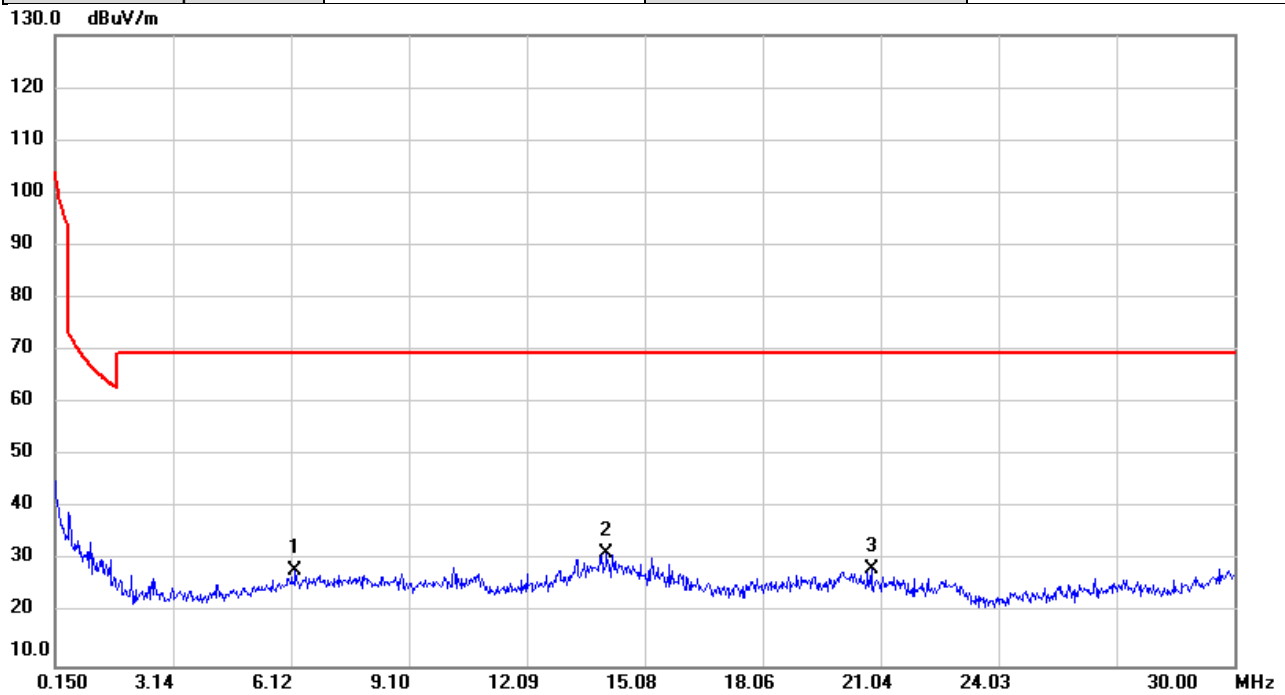


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		6.2393	32.03	-3.77	28.26	69.54	-41.28	QP	
2	*	14.1197	35.78	-4.27	31.51	69.54	-38.03	QP	
3		20.8062	32.96	-4.58	28.38	69.54	-41.16	QP	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/30
Test Frequency	5180MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

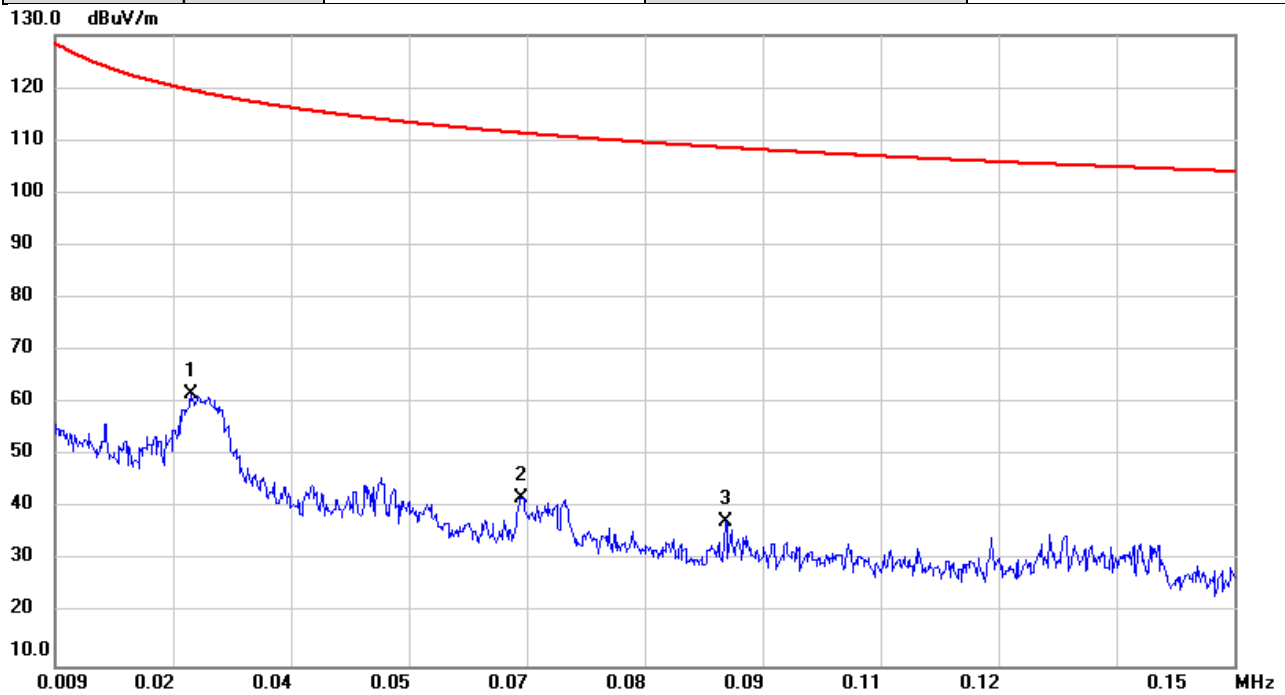


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0252	32.55	29.12	61.67	119.58	-57.91	AVG	
2		0.0648	21.88	20.16	42.04	111.37	-69.33	AVG	
3		0.0892	20.48	17.02	37.50	108.60	-71.10	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/30
Test Frequency	5180MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

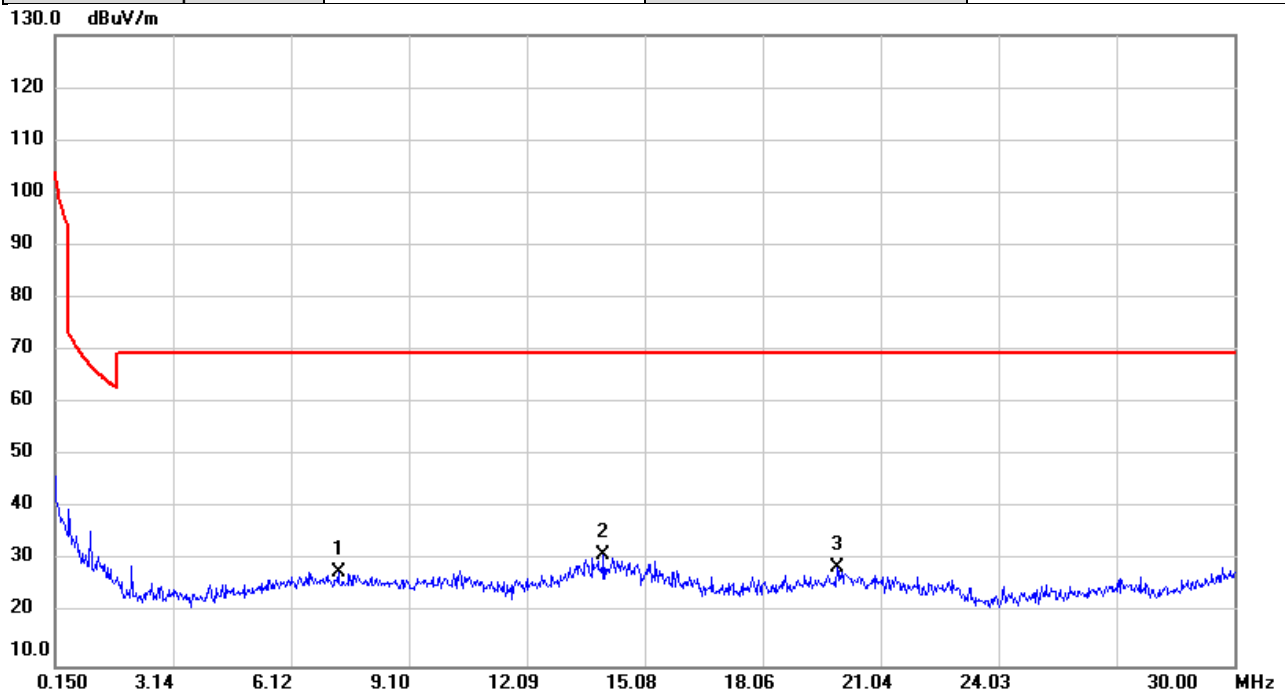

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7.3140	31.60	-3.69	27.91	69.54	-41.63	QP	
2	*	14.0303	35.33	-4.22	31.11	69.54	-38.43	QP	
3		19.9406	33.10	-4.26	28.84	69.54	-40.70	QP	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C RADIATED EMISSIONS - 30 MHZ TO 1 GHZ

Test Mode	IEEE 802.11a	Test Date	2025/12/29
Test Frequency	5180MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

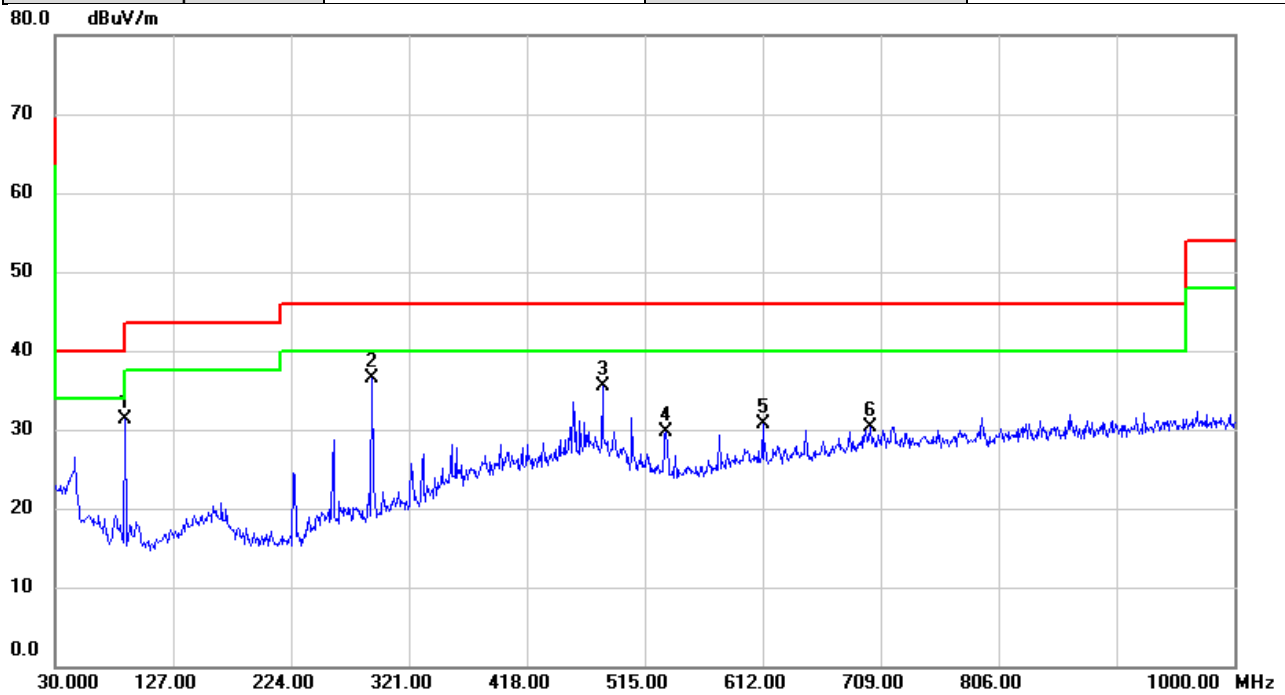


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	87.2300	48.28	-16.88	31.40	40.00	-8.60	peak	
2		290.9300	46.65	-10.09	36.56	46.00	-9.44	peak	
3		480.0800	40.68	-5.13	35.55	46.00	-10.45	peak	
4		532.4600	33.86	-4.21	29.65	46.00	-16.35	peak	
5		612.0000	32.40	-1.72	30.68	46.00	-15.32	peak	
6		700.2700	29.48	0.78	30.26	46.00	-15.74	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/29
Test Frequency	5180MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

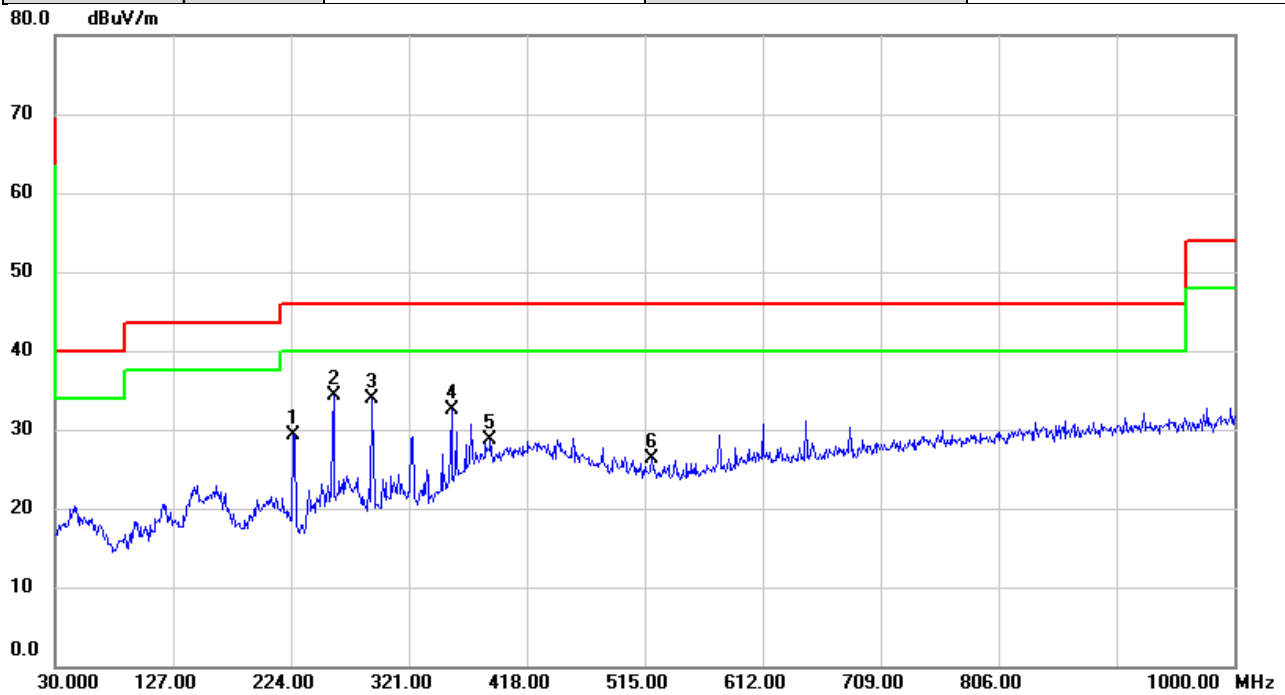


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		225.9400	42.92	-13.68	29.24	46.00	-16.76	peak	
2	*	258.9200	45.77	-11.51	34.26	46.00	-11.74	peak	
3		290.9300	43.90	-10.09	33.81	46.00	-12.19	peak	
4		355.9200	41.06	-8.53	32.53	46.00	-13.47	peak	
5		387.9300	36.17	-7.42	28.75	46.00	-17.25	peak	
6		520.8200	30.69	-4.41	26.28	46.00	-19.72	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D RADIATED EMISSIONS - ABOVE 1 GHZ

Test Mode	IEEE 802.11a	Test Date	2025/12/24
Test Frequency	5180MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

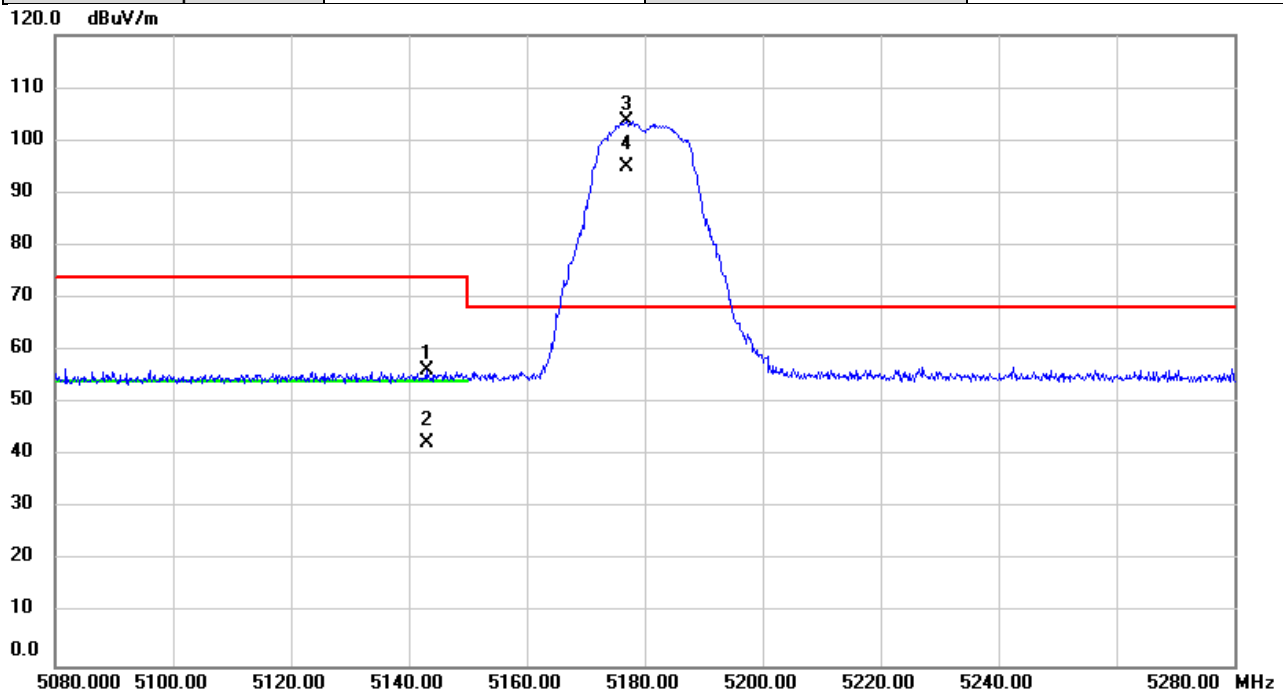


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5143.000	45.85	10.48	56.33	74.00	-17.67	peak	
2		5143.000	31.91	10.48	42.39	54.00	-11.61	AVG	
3	*	5177.000	93.14	10.52	103.66	68.20	35.46	peak	NoLimit
4	X	5177.000	84.32	10.52	94.84	68.20	26.64	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/24
Test Frequency	5240MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

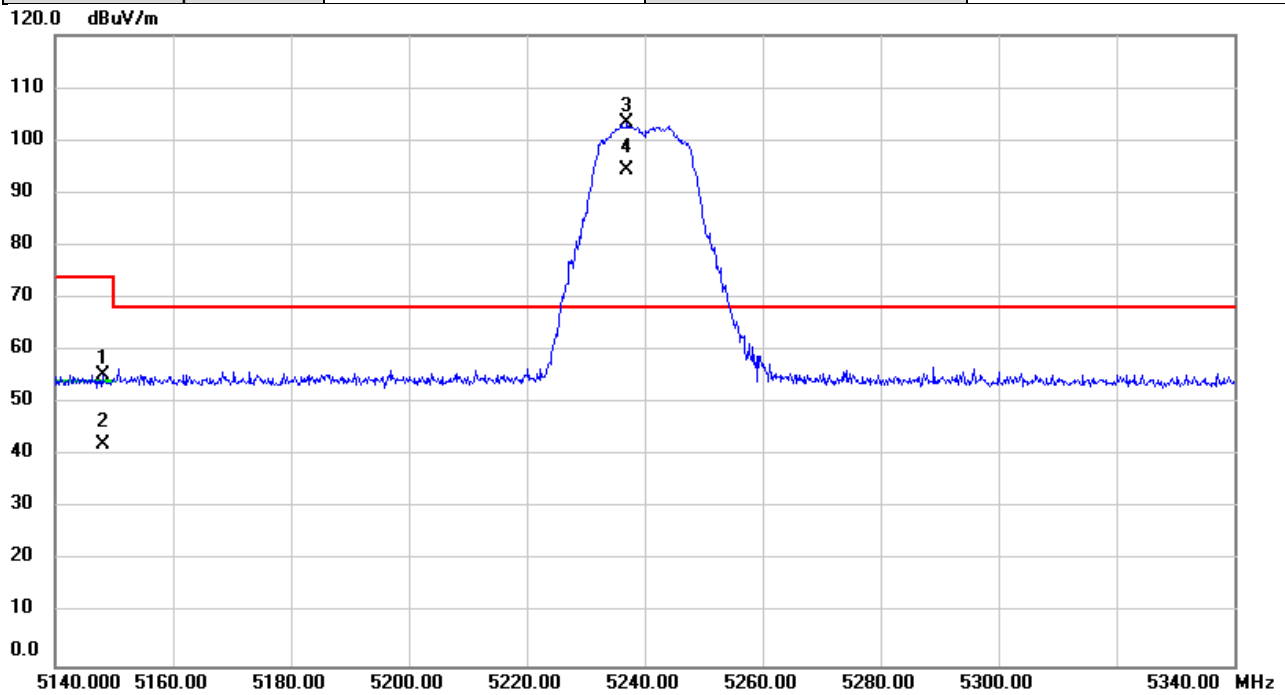


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5148.000	44.79	10.50	55.29	74.00	-18.71	peak	
2		5148.000	31.79	10.50	42.29	54.00	-11.71	AVG	
3	*	5237.000	92.80	10.58	103.38	68.20	35.18	peak	NoLimit
4	X	5237.000	83.77	10.58	94.35	68.20	26.15	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/24
Test Frequency	5260MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

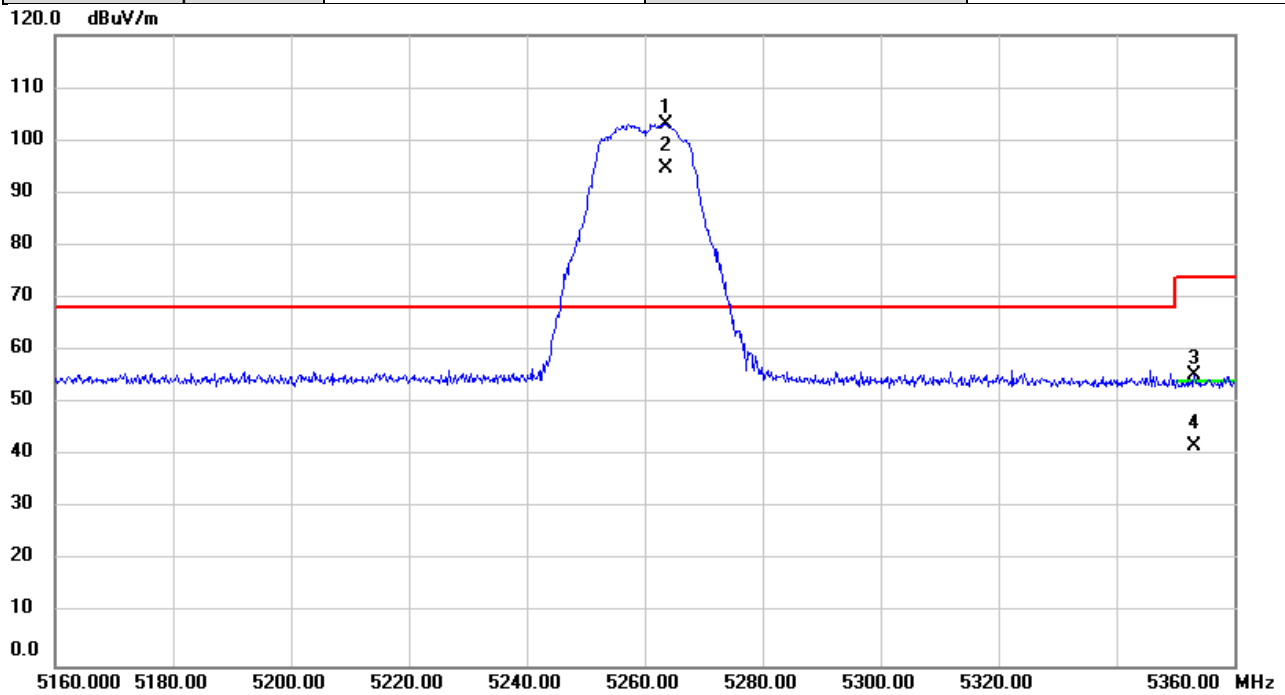


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5263.600	92.52	10.60	103.12	68.20	34.92	peak	NoLimit
2	X	5263.600	84.17	10.60	94.77	68.20	26.57	AVG	NoLimit
3		5353.200	44.52	10.68	55.20	74.00	-18.80	peak	
4		5353.200	31.22	10.68	41.90	54.00	-12.10	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/24
Test Frequency	5320MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

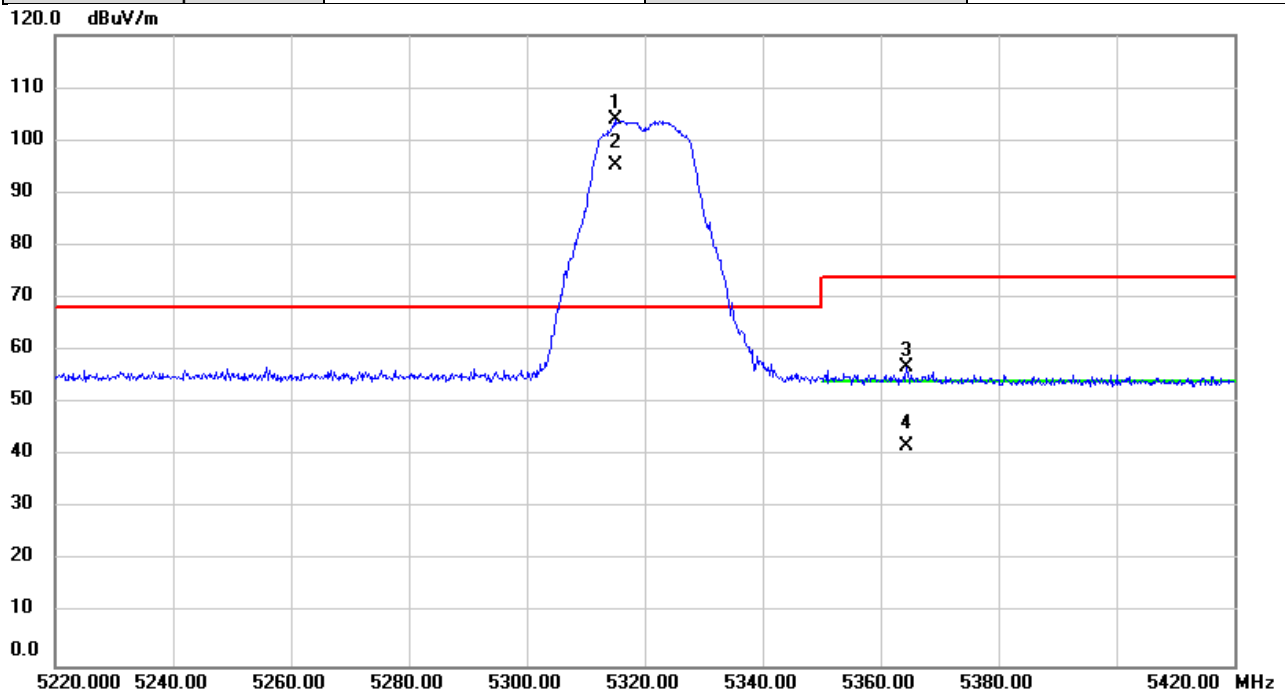


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5315.000	93.25	10.64	103.89	68.20	35.69	peak	NoLimit
2	X	5315.000	84.47	10.64	95.11	68.20	26.91	AVG	NoLimit
3		5364.400	46.13	10.69	56.82	74.00	-17.18	peak	
4		5364.400	31.27	10.69	41.96	54.00	-12.04	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/24
Test Frequency	5500MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

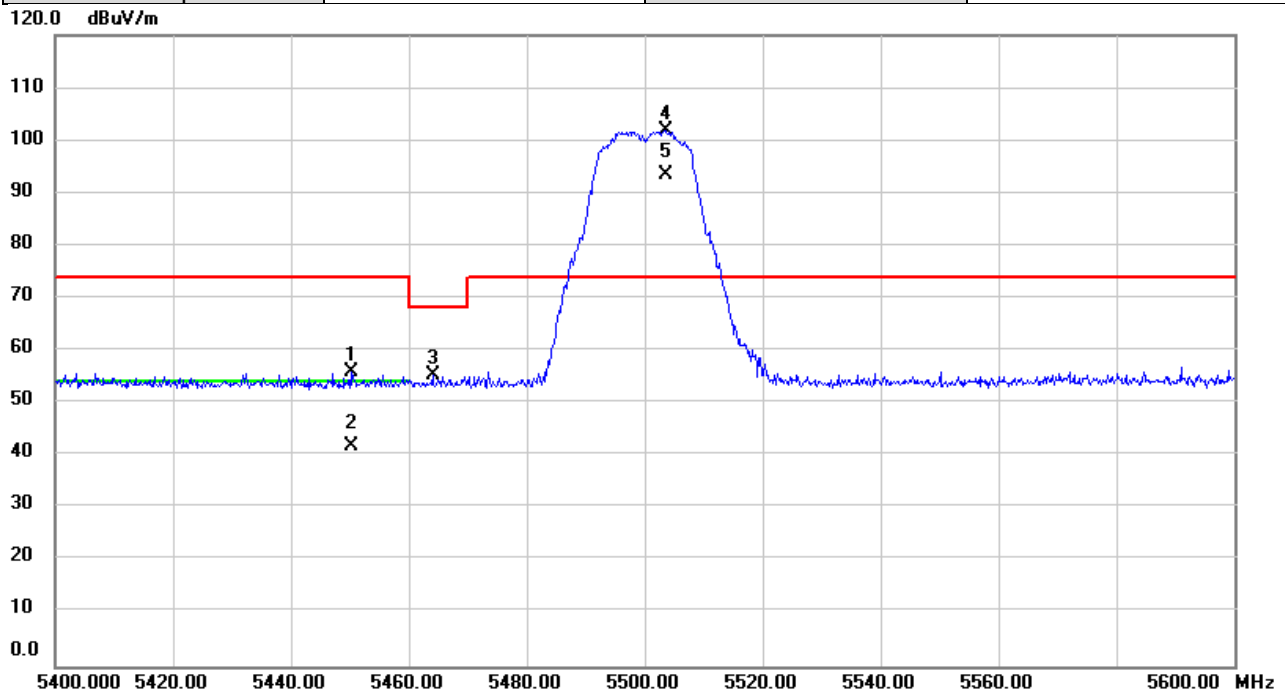


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5450.200	45.10	10.77	55.87	74.00	-18.13	peak	
2		5450.200	31.06	10.77	41.83	54.00	-12.17	AVG	
3		5464.000	44.52	10.78	55.30	68.20	-12.90	peak	
4	*	5503.600	91.12	10.83	101.95	74.00	27.95	peak	NoLimit
5	X	5503.600	82.55	10.83	93.38	74.00	19.38	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/24
Test Frequency	5700MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

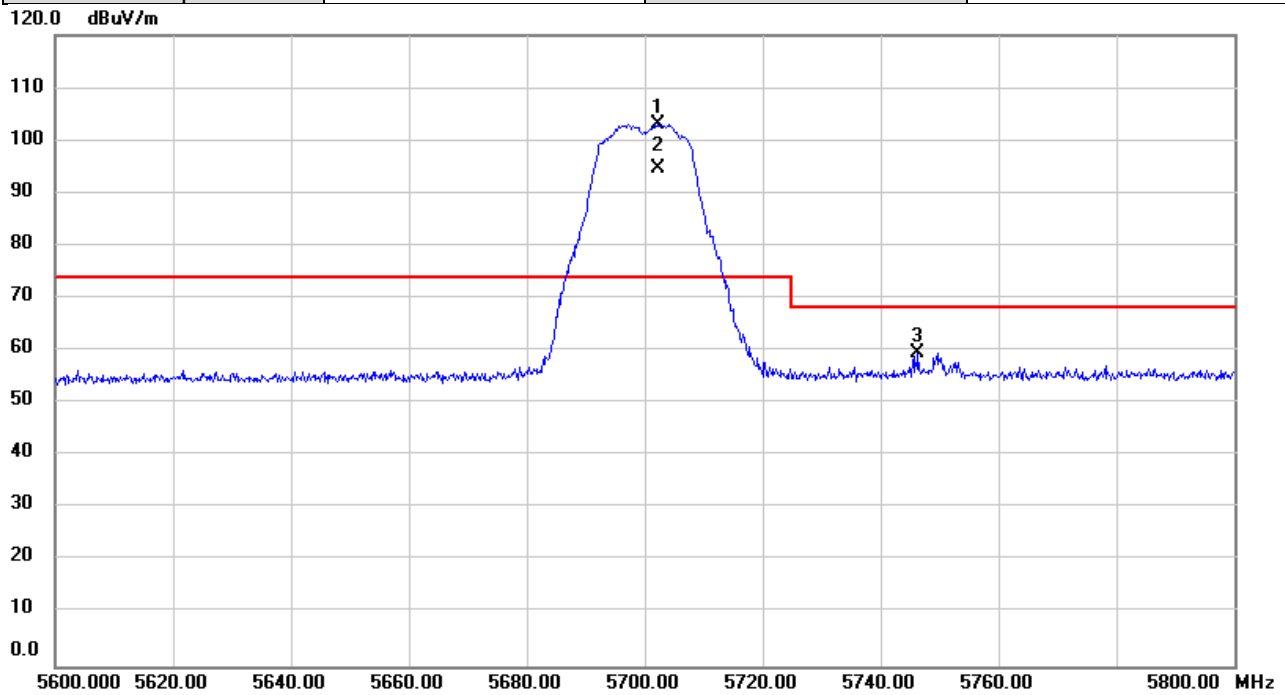


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5702.200	91.90	11.15	103.05	74.00	29.05	peak	NoLimit
2	X	5702.200	83.50	11.15	94.65	74.00	20.65	AVG	NoLimit
3		5746.400	48.32	11.22	59.54	68.20	-8.66	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/25
Test Frequency	5745MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

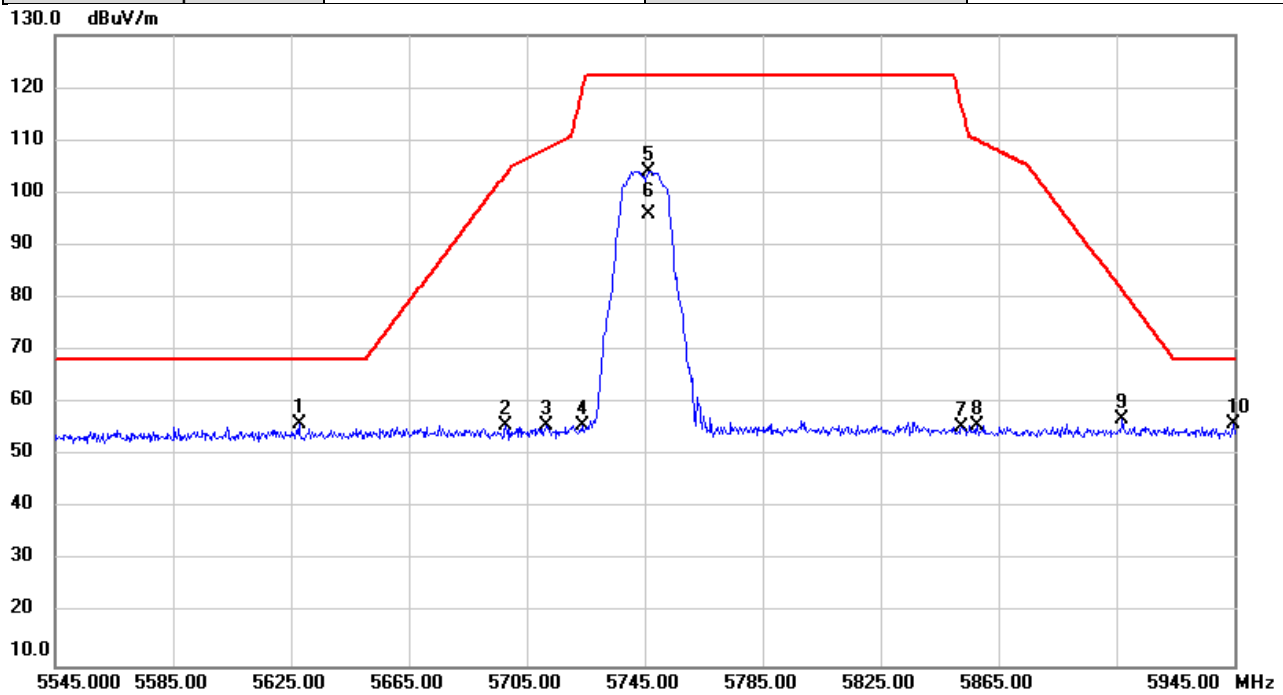


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5627.800	45.00	11.03	56.03	68.20	-12.17	peak	
2		5697.800	44.64	11.15	55.79	103.58	-47.79	peak	
3		5711.800	44.69	11.17	55.86	108.51	-52.65	peak	
4		5723.800	44.68	11.19	55.87	119.46	-63.59	peak	
5		5746.200	92.95	11.22	104.17	122.20	-18.03	peak	NoLimit
6		5746.200	84.61	11.22	95.83	122.20	-26.37	AVG	NoLimit
7		5852.600	43.98	11.40	55.38	116.27	-60.89	peak	
8		5857.800	44.32	11.41	55.73	110.01	-54.28	peak	
9		5907.000	45.36	11.49	56.85	81.48	-24.63	peak	
10		5944.600	44.41	11.55	55.96	68.20	-12.24	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/25
Test Frequency	5825MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

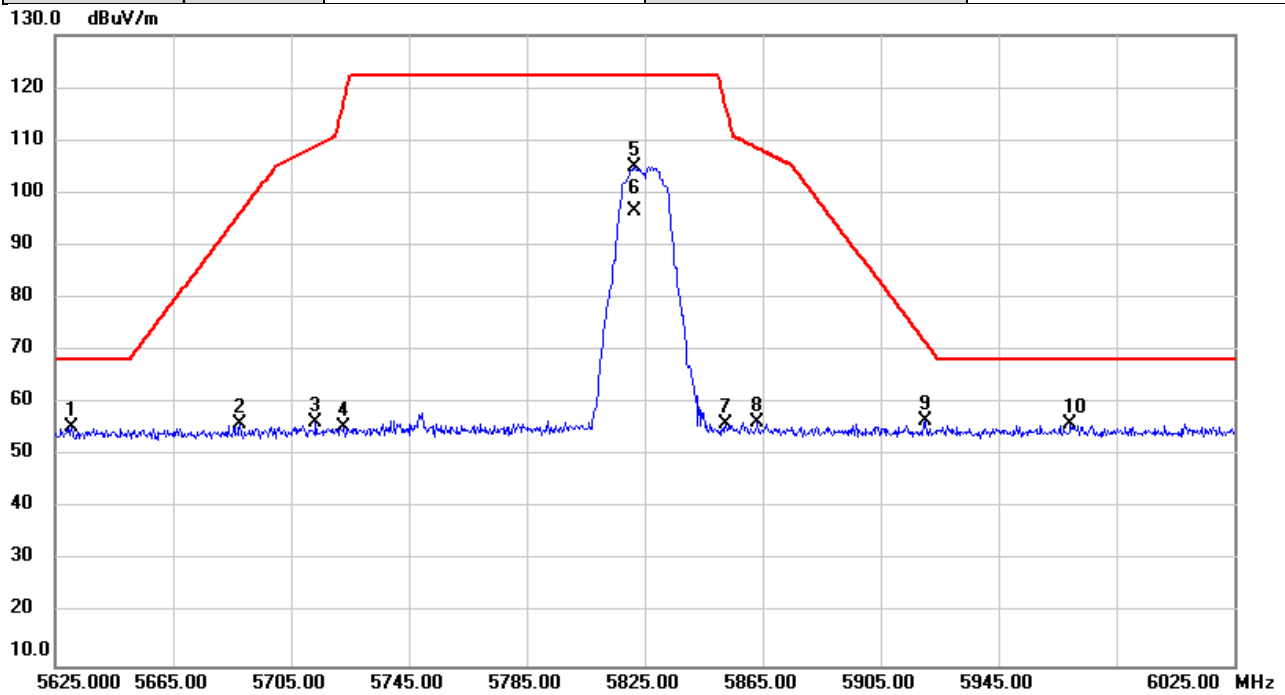


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5630.600	44.48	11.03	55.51	68.20	-12.69	peak	
2		5687.800	44.91	11.12	56.03	96.20	-40.17	peak	
3		5713.400	45.10	11.17	56.27	108.95	-52.68	peak	
4		5723.000	44.27	11.19	55.46	117.64	-62.18	peak	
5		5821.400	93.68	11.35	105.03	122.20	-17.17	peak	NoLimit
6		5821.400	85.27	11.35	96.62	122.20	-25.58	AVG	NoLimit
7		5852.600	44.71	11.40	56.11	116.27	-60.16	peak	
8		5863.400	44.97	11.42	56.39	108.45	-52.06	peak	
9		5920.200	45.10	11.51	56.61	71.74	-15.13	peak	
10	*	5969.400	44.49	11.60	56.09	68.20	-12.11	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/26
Test Frequency	5180MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

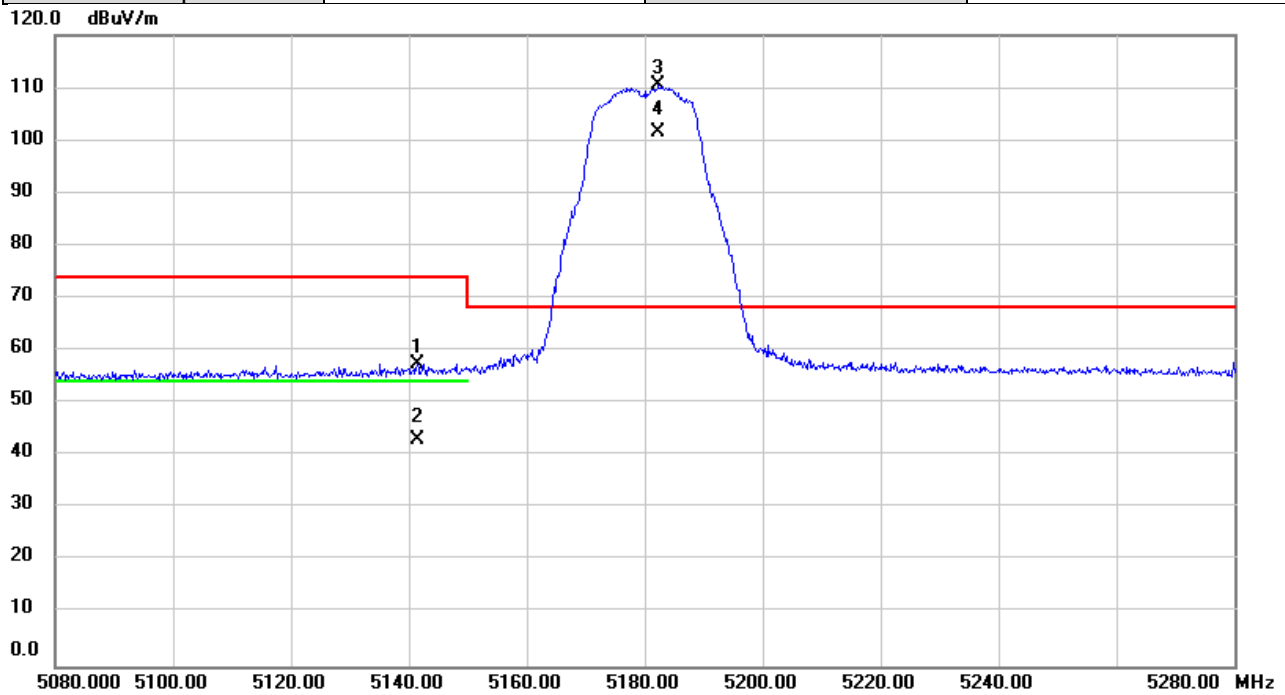


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5141.400	47.08	10.48	57.56	74.00	-16.44	peak	
2		5141.400	32.48	10.48	42.96	54.00	-11.04	AVG	
3	*	5182.400	100.12	10.53	110.65	68.20	42.45	peak	NoLimit
4	X	5182.400	90.97	10.53	101.50	68.20	33.30	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/27
Test Frequency	5240MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

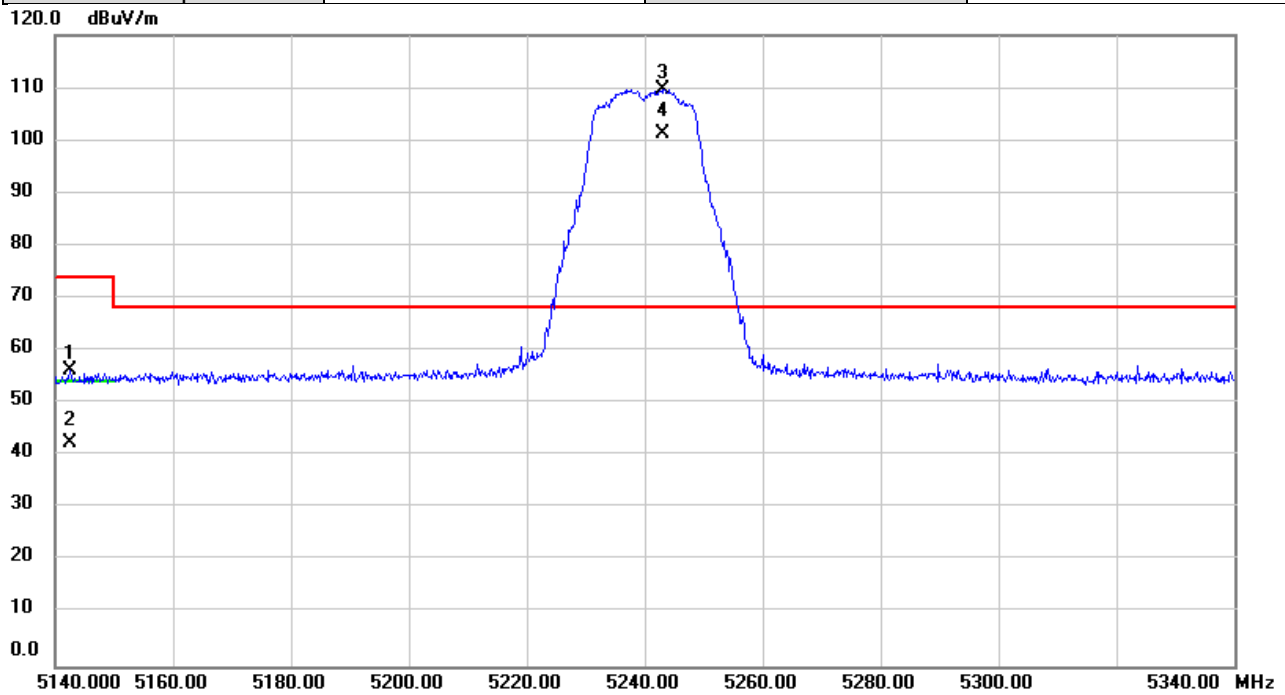


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5142.600	45.81	10.48	56.29	74.00	-17.71	peak	
2		5142.600	31.93	10.48	42.41	54.00	-11.59	AVG	
3	*	5243.200	99.10	10.58	109.68	68.20	41.48	peak	NoLimit
4	X	5243.200	90.69	10.58	101.27	68.20	33.07	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/27
Test Frequency	5260MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

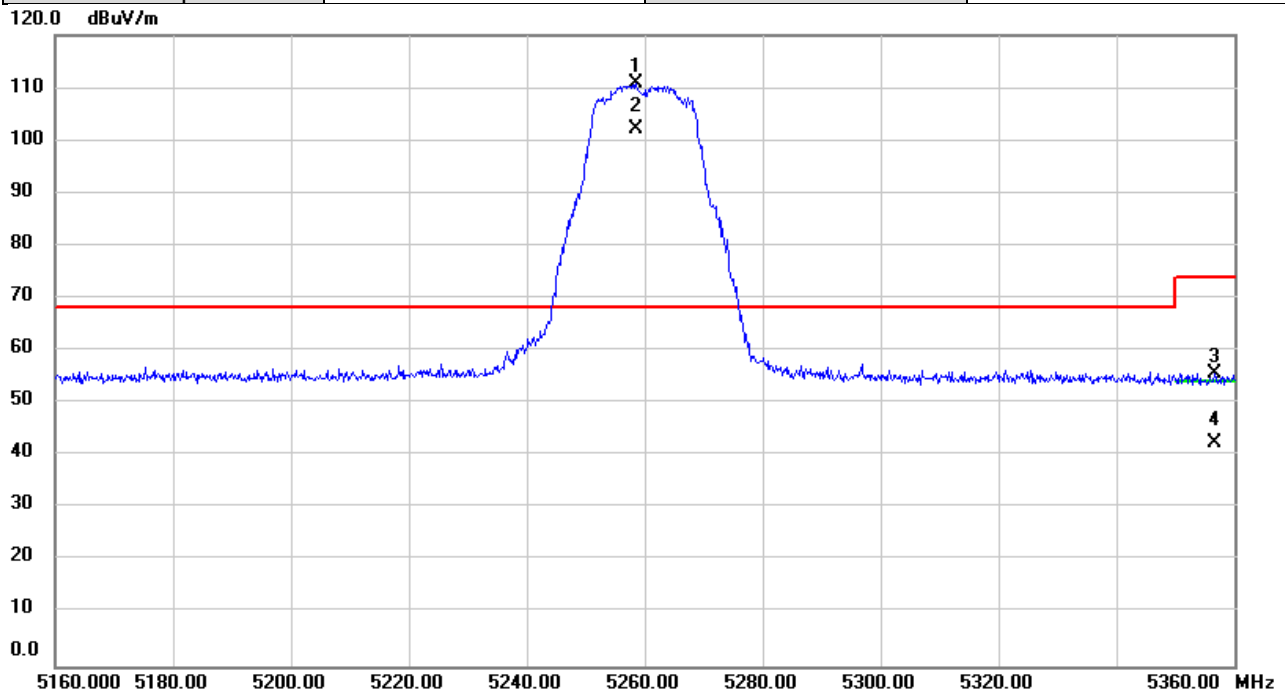


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5258.600	100.24	10.60	110.84	68.20	42.64	peak	NoLimit
2	X	5258.600	91.50	10.60	102.10	68.20	33.90	AVG	NoLimit
3		5356.600	44.88	10.70	55.58	74.00	-18.42	peak	
4		5356.600	31.67	10.70	42.37	54.00	-11.63	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/27
Test Frequency	5320MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

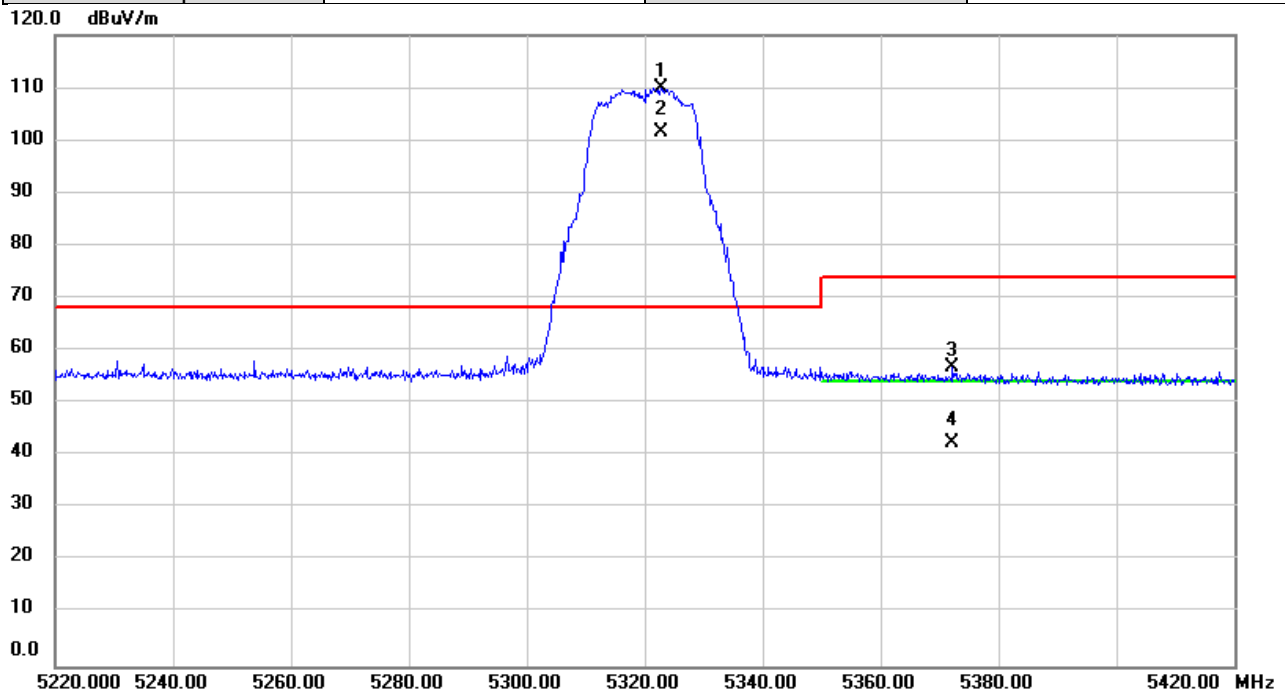


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5322.800	99.42	10.66	110.08	68.20	41.88	peak	NoLimit
2	X	5322.800	90.88	10.66	101.54	68.20	33.34	AVG	NoLimit
3		5372.200	46.01	10.70	56.71	74.00	-17.29	peak	
4		5372.200	31.68	10.70	42.38	54.00	-11.62	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/27
Test Frequency	5500MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

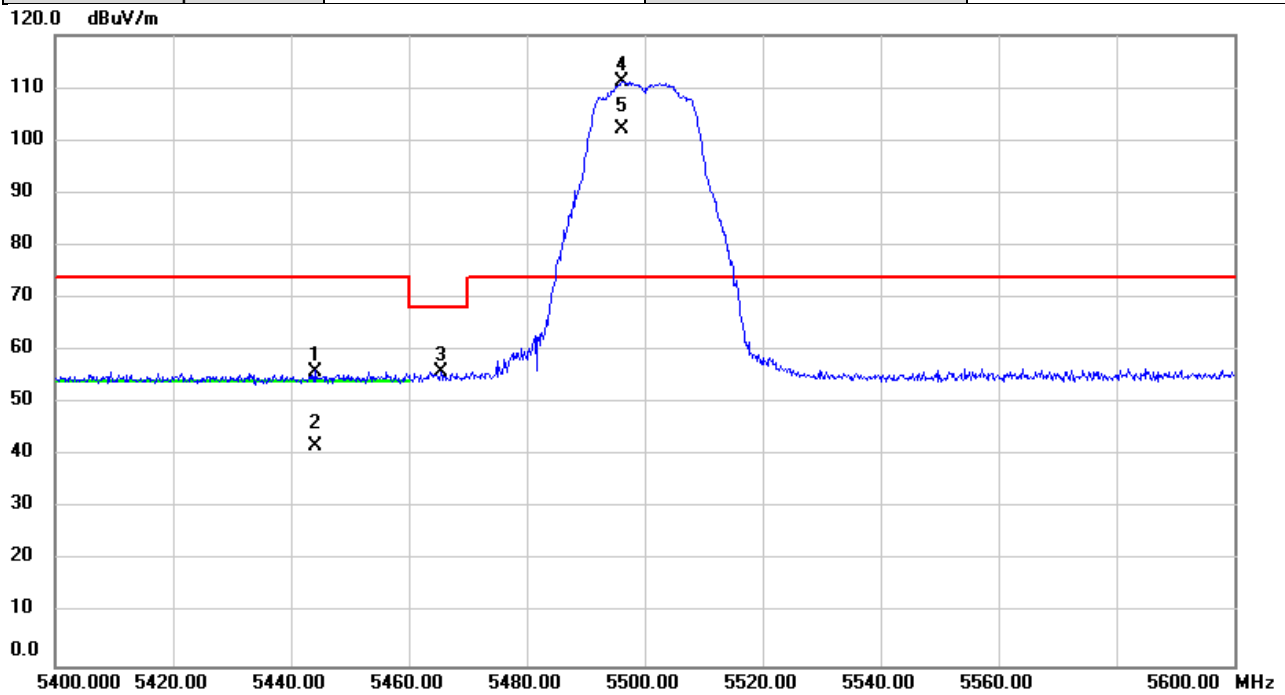


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5444.000	45.33	10.77	56.10	74.00	-17.90	peak	
2		5444.000	31.23	10.77	42.00	54.00	-12.00	AVG	
3		5465.400	45.19	10.78	55.97	68.20	-12.23	peak	
4	*	5496.200	100.44	10.82	111.26	74.00	37.26	peak	NoLimit
5	X	5496.200	91.36	10.82	102.18	74.00	28.18	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/27
Test Frequency	5700MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

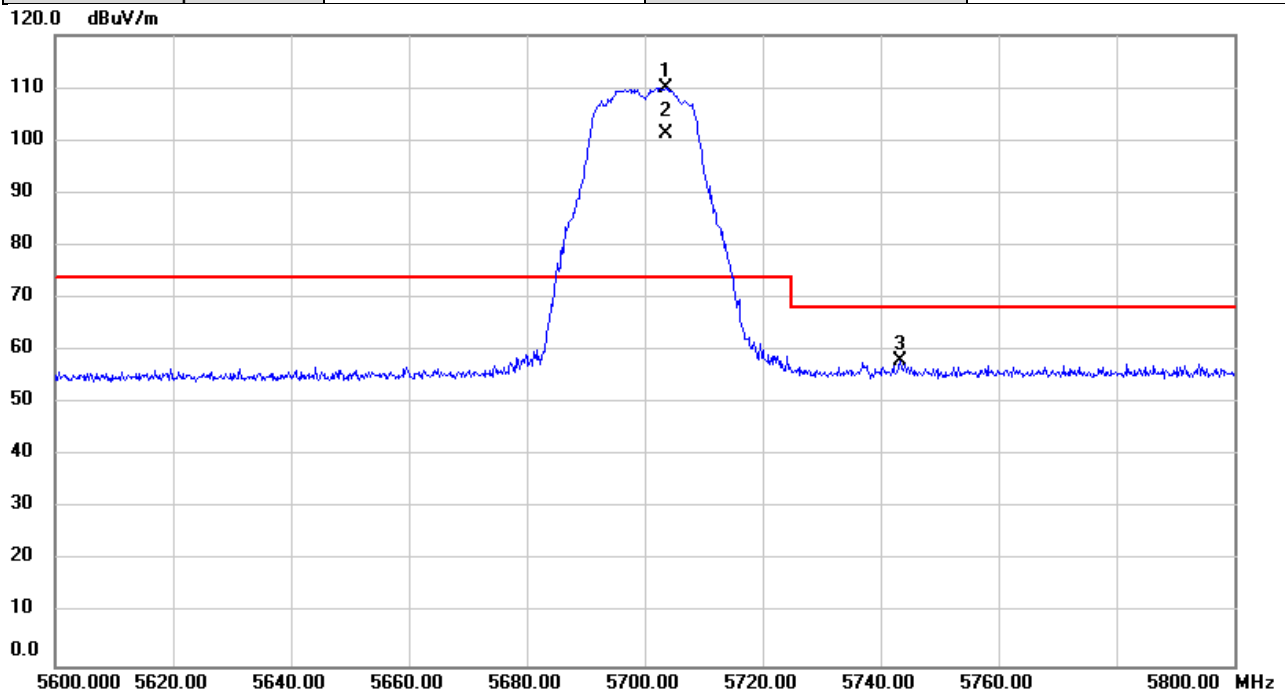


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5703.600	98.78	11.16	109.94	74.00	35.94	peak	NoLimit
2	X	5703.600	90.13	11.16	101.29	74.00	27.29	AVG	NoLimit
3		5743.400	46.71	11.22	57.93	68.20	-10.27	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/27
Test Frequency	5720MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

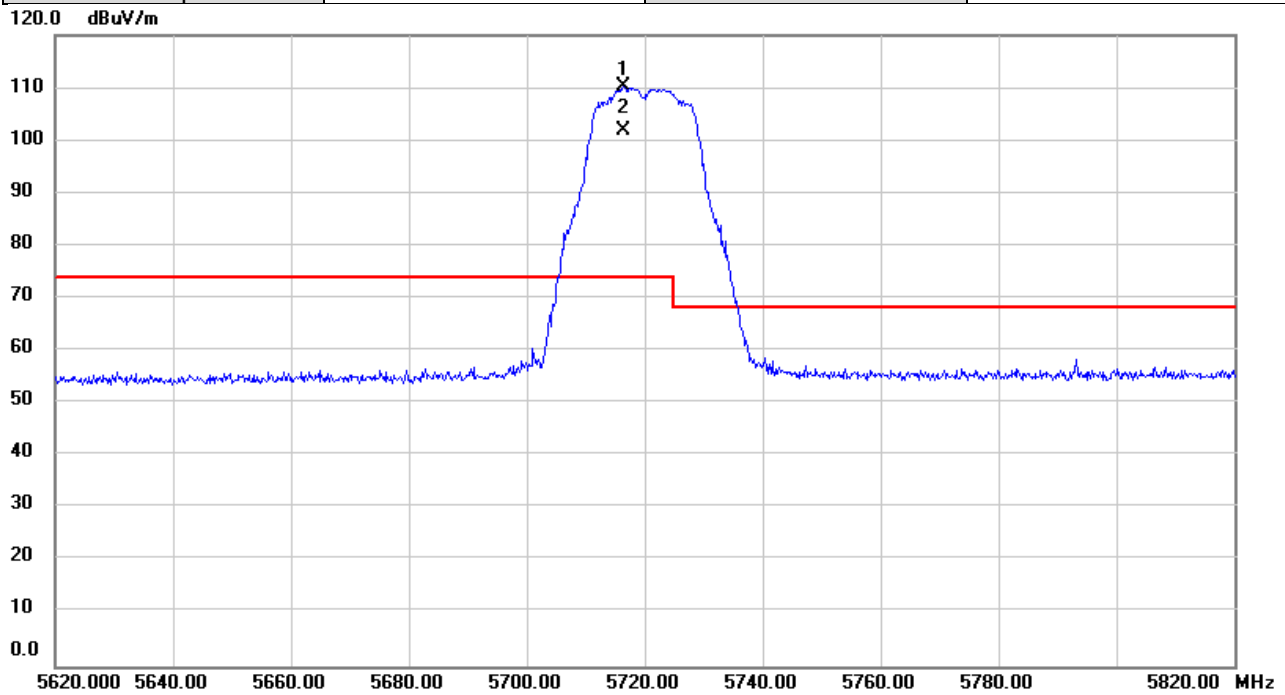


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5716.400	99.13	11.18	110.31	74.00	36.31	peak	NoLimit
2	X	5716.400	90.56	11.18	101.74	74.00	27.74	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/27
Test Frequency	5745MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

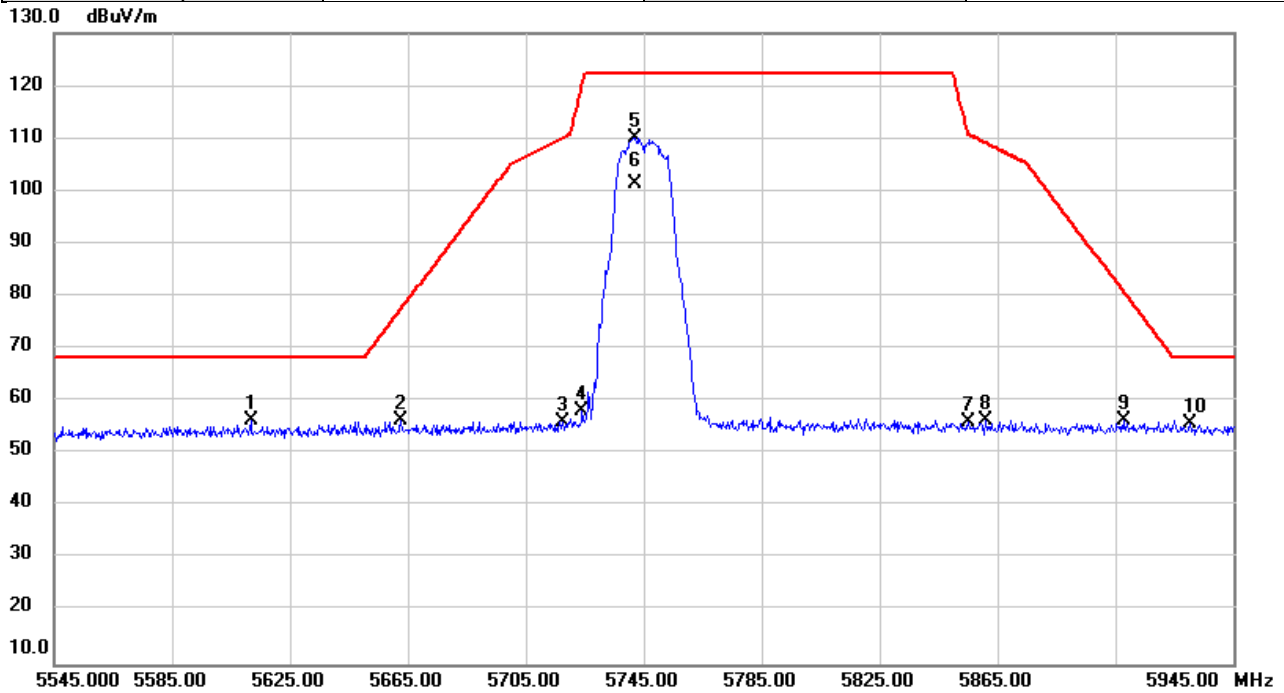


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5611.800	45.40	11.01	56.41	68.20	-11.79	peak	
2		5662.600	45.24	11.09	56.33	77.55	-21.22	peak	
3		5717.400	45.01	11.18	56.19	110.07	-53.88	peak	
4		5724.200	46.89	11.19	58.08	120.38	-62.30	peak	
5		5742.200	98.87	11.22	110.09	122.20	-12.11	peak	NoLimit
6		5742.200	90.23	11.22	101.45	122.20	-20.75	AVG	NoLimit
7		5855.000	44.66	11.41	56.07	110.80	-54.73	peak	
8		5861.000	44.93	11.42	56.35	109.12	-52.77	peak	
9		5907.800	44.95	11.49	56.44	80.89	-24.45	peak	
10		5930.200	44.20	11.52	55.72	68.20	-12.48	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/27
Test Frequency	5825MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

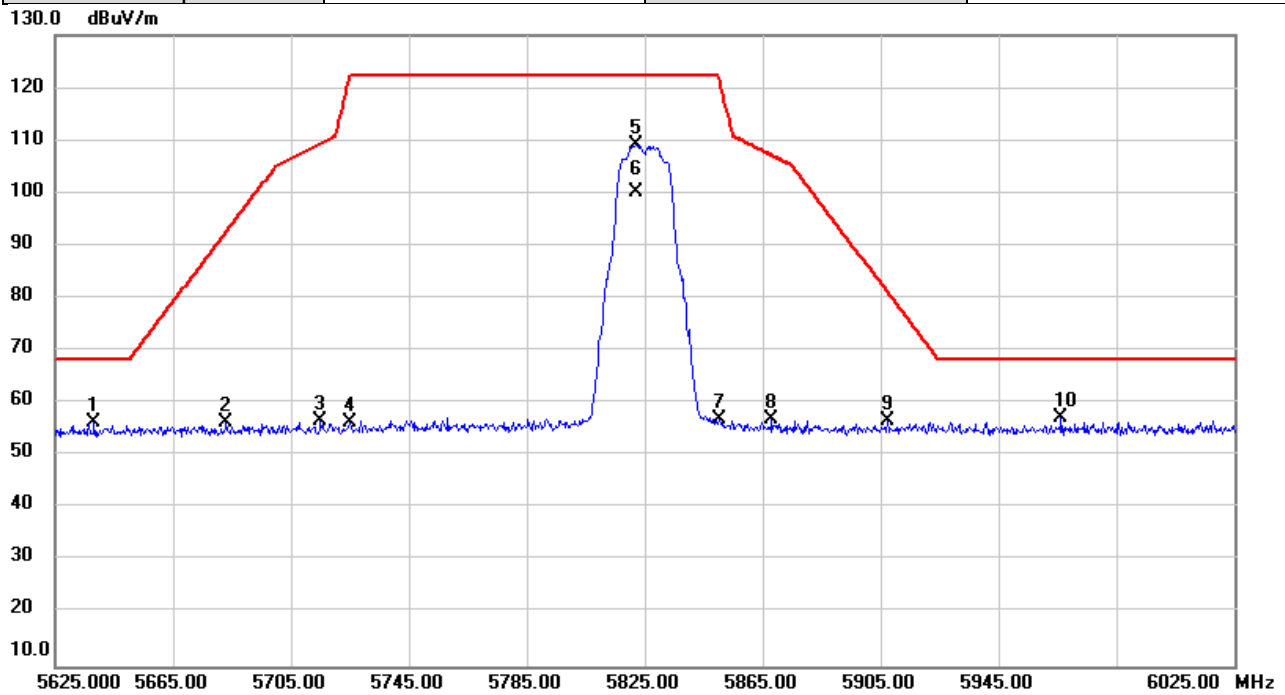


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5638.200	45.37	11.04	56.41	68.20	-11.79	peak	
2		5683.000	45.30	11.12	56.42	92.66	-36.24	peak	
3		5715.000	45.36	11.17	56.53	109.40	-52.87	peak	
4		5725.000	45.16	11.20	56.36	122.20	-65.84	peak	
5		5822.200	97.87	11.35	109.22	122.20	-12.98	peak	NoLimit
6		5822.200	88.74	11.35	100.09	122.20	-22.11	AVG	NoLimit
7		5850.200	45.67	11.39	57.06	121.74	-64.68	peak	
8		5868.200	45.60	11.43	57.03	107.10	-50.07	peak	
9		5907.400	45.13	11.49	56.62	81.19	-24.57	peak	
10	*	5966.200	45.70	11.59	57.29	68.20	-10.91	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/27
Test Frequency	5190MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

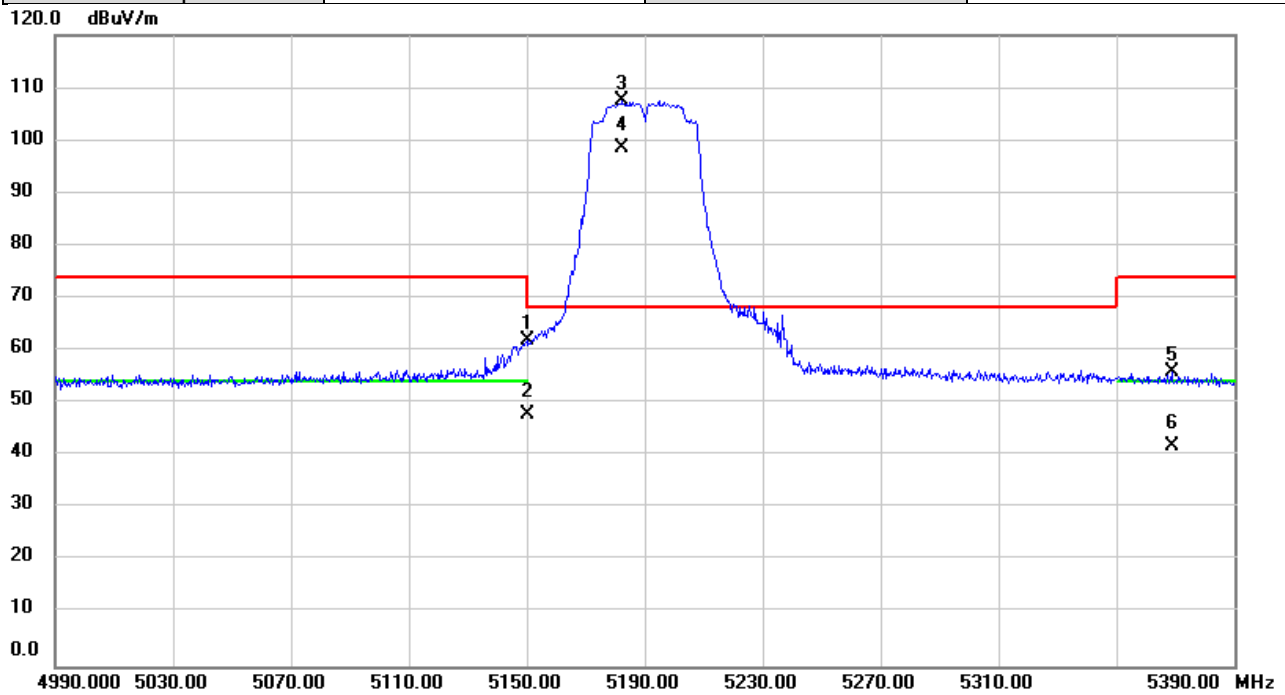


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	51.43	10.50	61.93	68.20	-6.27	peak	
2		5150.000	37.44	10.50	47.94	54.00	-6.06	AVG	
3	*	5182.400	97.00	10.53	107.53	68.20	39.33	peak	NoLimit
4	X	5182.400	88.11	10.53	98.64	68.20	30.44	AVG	NoLimit
5		5368.800	45.11	10.70	55.81	74.00	-18.19	peak	
6		5368.800	31.27	10.70	41.97	54.00	-12.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/27
Test Frequency	5230MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

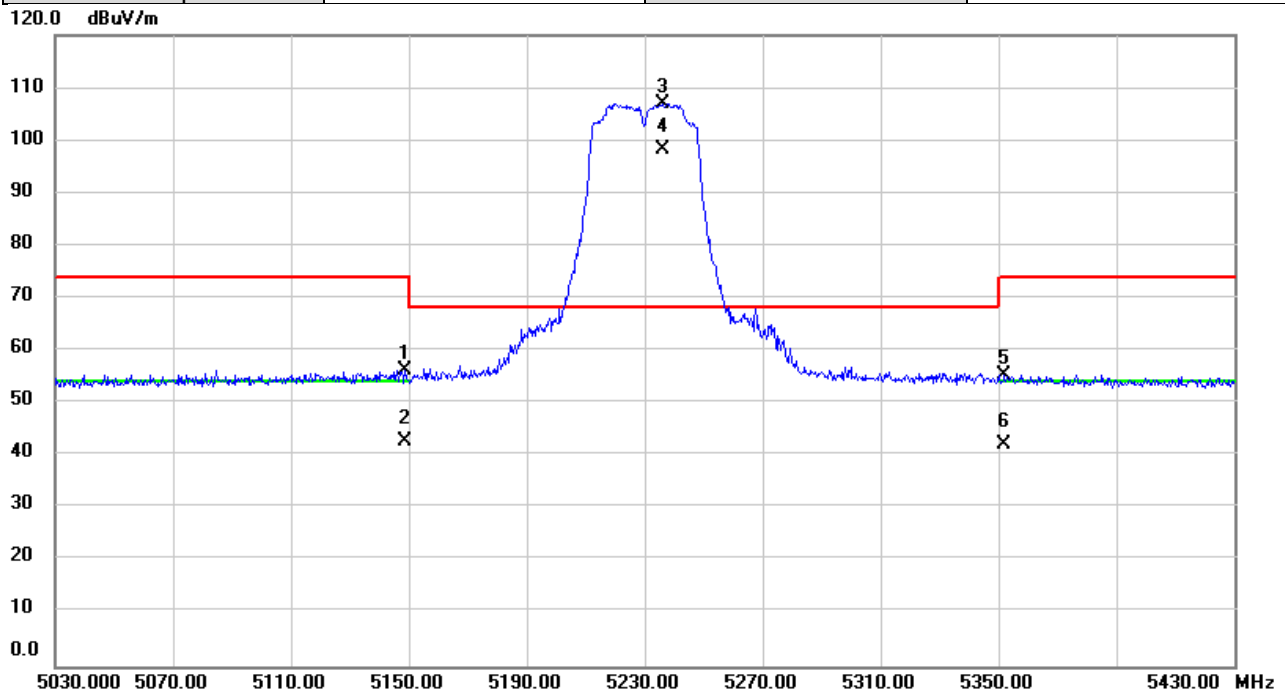


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5148.800	45.76	10.50	56.26	74.00	-17.74	peak	
2		5148.800	32.11	10.50	42.61	54.00	-11.39	AVG	
3	*	5236.400	96.41	10.58	106.99	68.20	38.79	peak	NoLimit
4	X	5236.400	87.70	10.58	98.28	68.20	30.08	AVG	NoLimit
5		5352.000	44.81	10.68	55.49	74.00	-18.51	peak	
6		5352.000	31.34	10.68	42.02	54.00	-11.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/27
Test Frequency	5270MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

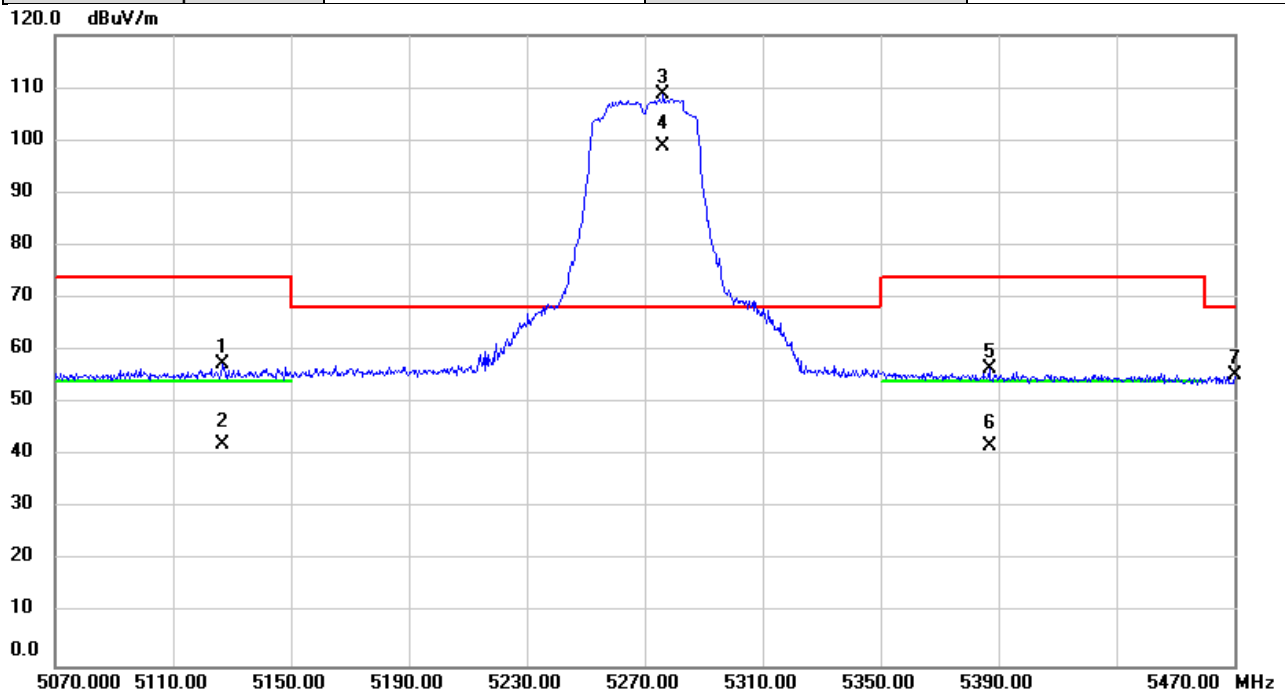


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5126.800	46.92	10.48	57.40	74.00	-16.60	peak	
2		5126.800	31.80	10.48	42.28	54.00	-11.72	AVG	
3	*	5276.400	98.06	10.61	108.67	68.20	40.47	peak	NoLimit
4	X	5276.400	88.39	10.61	99.00	68.20	30.80	AVG	NoLimit
5		5386.800	45.90	10.72	56.62	74.00	-17.38	peak	
6		5386.800	31.10	10.72	41.82	54.00	-12.18	AVG	
7		5470.000	44.49	10.79	55.28	68.20	-12.92	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/27
Test Frequency	5310MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

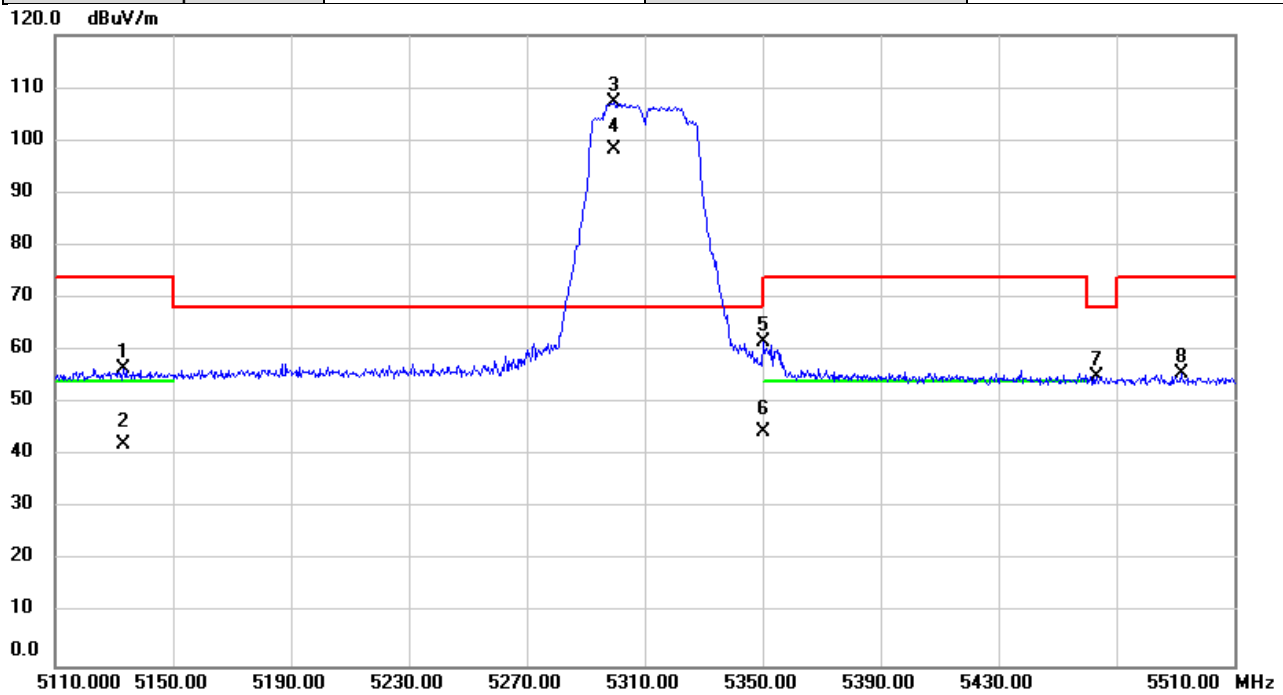


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	dBuV	Factor	ment			Detector	Comment
1		5133.200	45.97	10.49	56.46	74.00	-17.54	peak	
2		5133.200	31.72	10.49	42.21	54.00	-11.79	AVG	
3	*	5299.600	96.55	10.64	107.19	68.20	38.99	peak	NoLimit
4	X	5299.600	87.62	10.64	98.26	68.20	30.06	AVG	NoLimit
5		5350.000	51.06	10.68	61.74	74.00	-12.26	peak	
6		5350.000	33.83	10.68	44.51	54.00	-9.49	AVG	
7		5463.200	44.20	10.78	54.98	68.20	-13.22	peak	
8		5492.000	44.94	10.81	55.75	74.00	-18.25	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/27
Test Frequency	5510MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

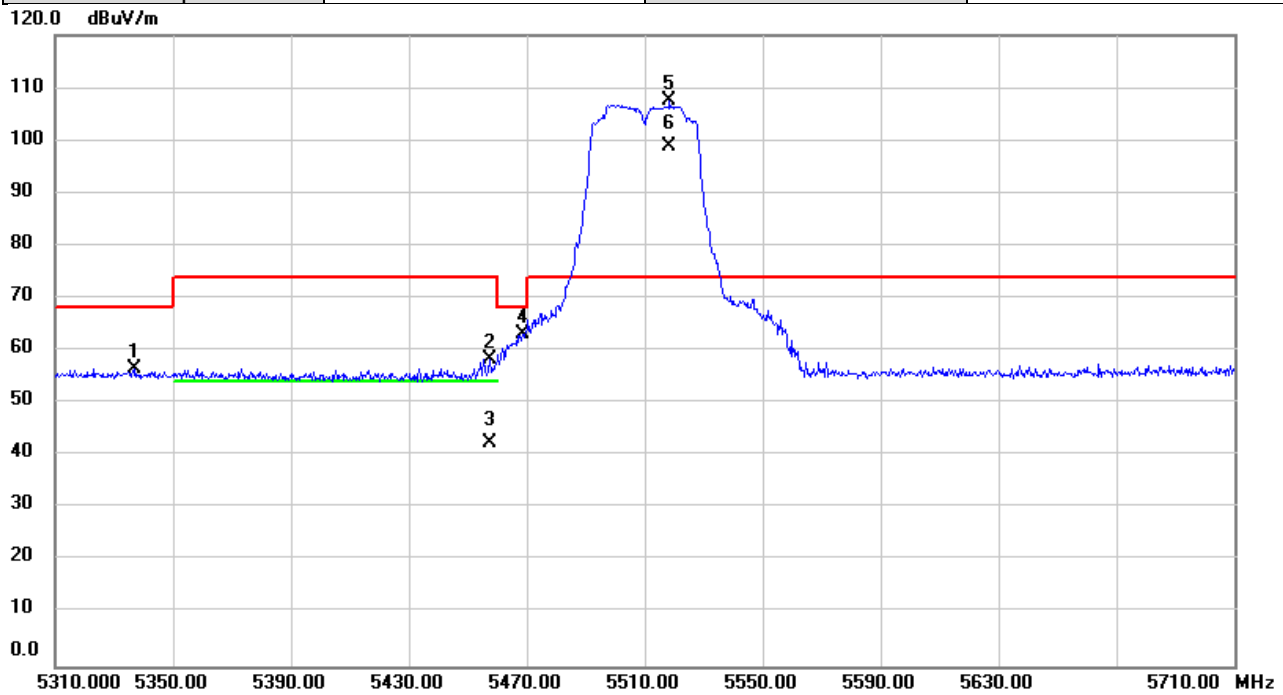


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5337.200	45.80	10.68	56.48	68.20	-11.72	peak	
2		5457.600	47.54	10.79	58.33	74.00	-15.67	peak	
3		5457.600	31.61	10.79	42.40	54.00	-11.60	AVG	
4		5468.800	52.30	10.79	63.09	68.20	-5.11	peak	
5	*	5518.400	96.61	10.86	107.47	74.00	33.47	peak	NoLimit
6	X	5518.400	87.85	10.86	98.71	74.00	24.71	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/27
Test Frequency	5670MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

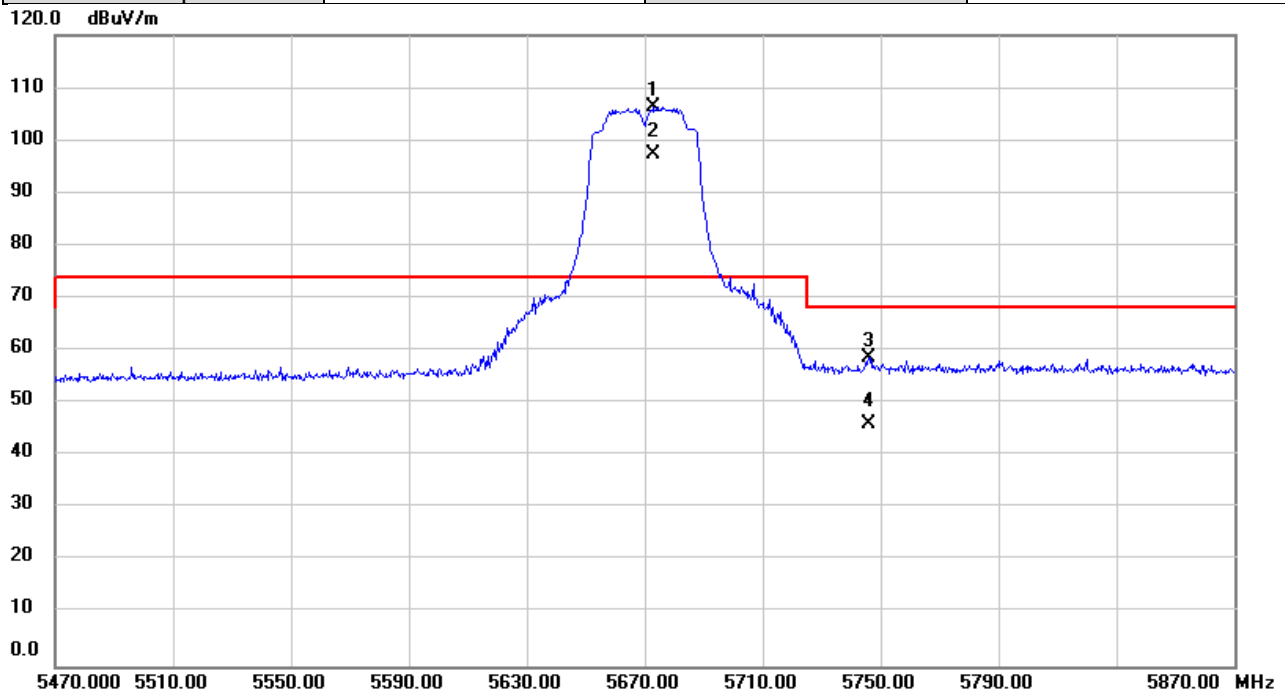


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5673.200	95.30	11.11	106.41	74.00	32.41	peak	NoLimit
2	X	5673.200	86.18	11.11	97.29	74.00	23.29	AVG	NoLimit
3		5746.000	47.30	11.22	58.52	68.20	-9.68	peak	
4		5746.000	34.82	11.22	46.04	68.20	-22.16	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/27
Test Frequency	5710MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

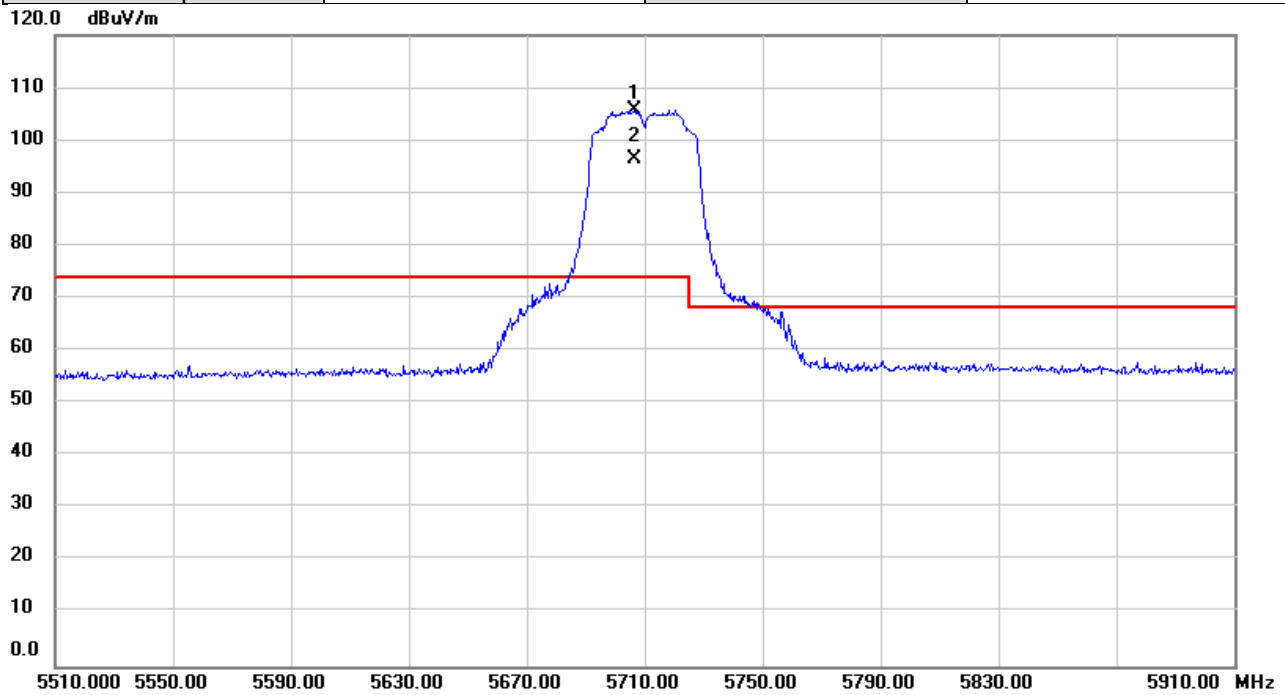


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5706.400	94.54	11.16	105.70	74.00	31.70	peak	NoLimit
2	X	5706.400	85.30	11.16	96.46	74.00	22.46	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/27
Test Frequency	5755MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

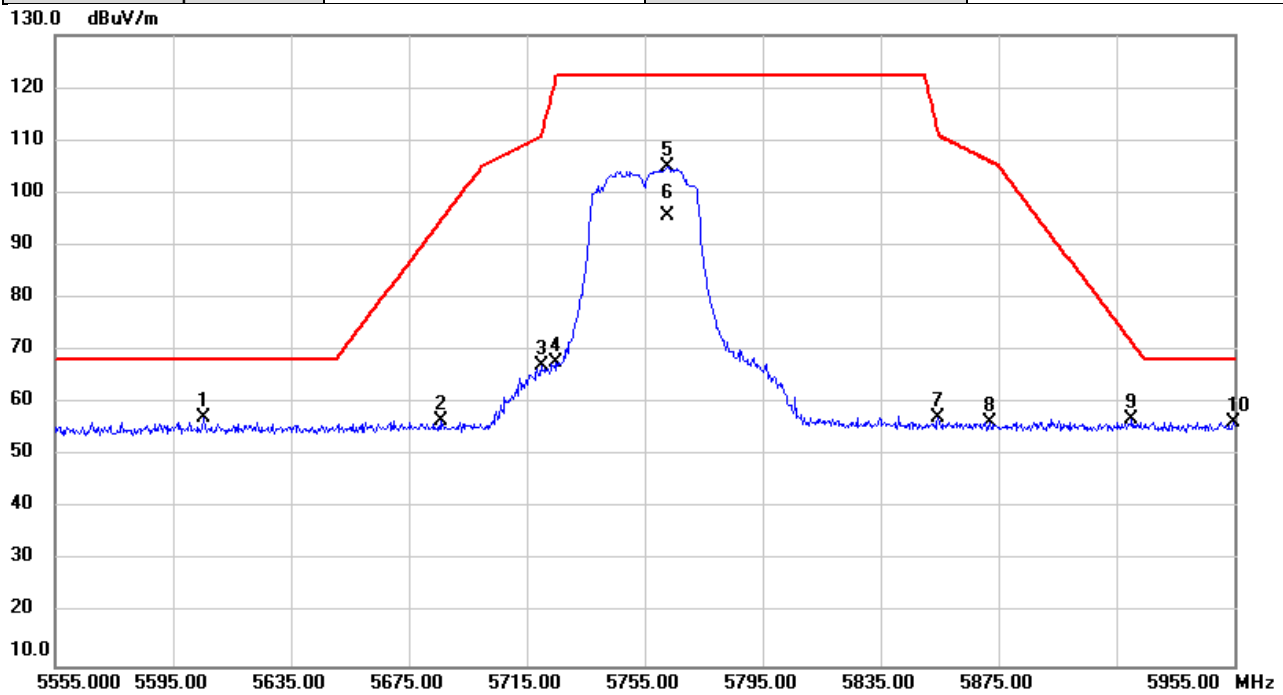


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5605.400	46.22	11.00	57.22	68.20	-10.98	peak	
2		5685.800	45.67	11.12	56.79	94.73	-37.94	peak	
3		5719.800	56.04	11.19	67.23	110.74	-43.51	peak	
4		5725.000	56.49	11.20	67.69	122.20	-54.51	peak	
5		5762.600	93.70	11.26	104.96	122.20	-17.24	peak	NoLimit
6		5762.600	84.40	11.26	95.66	122.20	-26.54	AVG	NoLimit
7		5854.600	45.71	11.41	57.12	111.71	-54.59	peak	
8		5871.800	44.99	11.43	56.42	106.09	-49.67	peak	
9		5920.200	45.49	11.51	57.00	71.74	-14.74	peak	
10		5954.600	44.92	11.57	56.49	68.20	-11.71	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/27
Test Frequency	5795MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

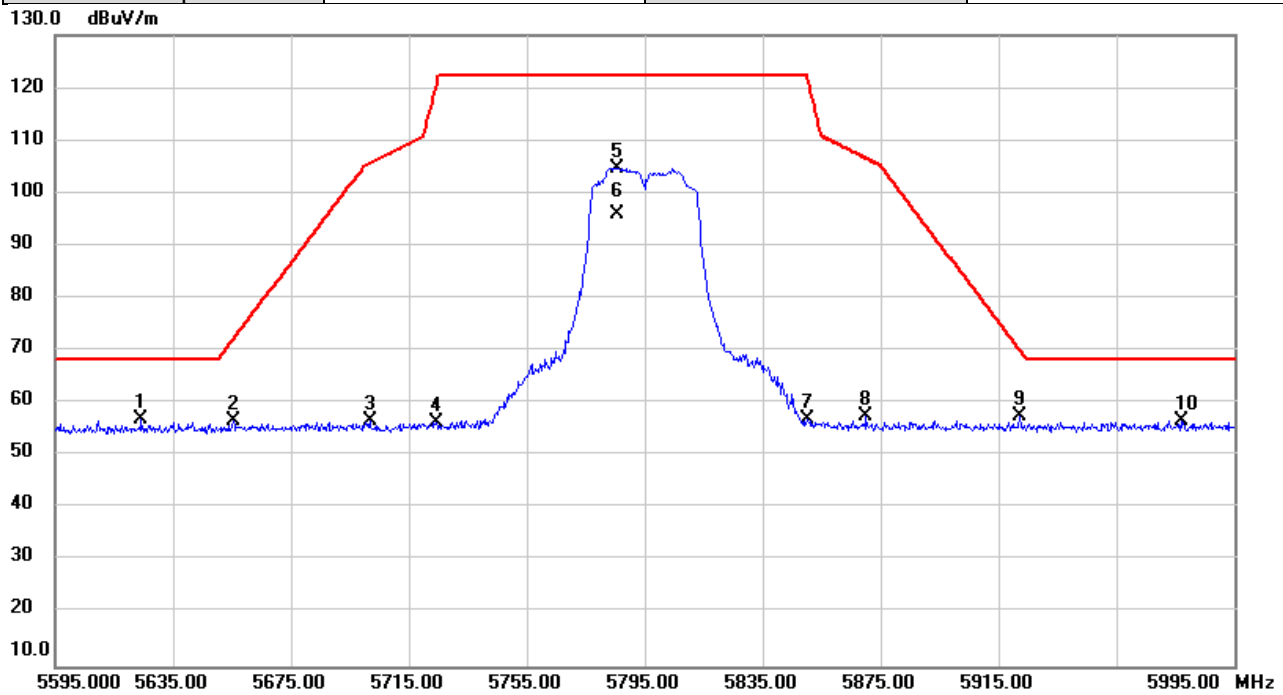


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5624.200	45.96	11.02	56.98	68.20	-11.22	peak	
2		5655.400	45.50	11.08	56.58	72.21	-15.63	peak	
3		5701.800	45.45	11.15	56.60	105.70	-49.10	peak	
4		5724.200	45.29	11.19	56.48	120.38	-63.90	peak	
5		5785.800	93.42	11.29	104.71	122.20	-17.49	peak	NoLimit
6		5785.800	84.53	11.29	95.82	122.20	-26.38	AVG	NoLimit
7		5850.200	45.49	11.39	56.88	121.74	-64.86	peak	
8		5870.200	46.03	11.43	57.46	106.54	-49.08	peak	
9		5922.200	46.02	11.52	57.54	70.26	-12.72	peak	
10		5977.000	45.12	11.60	56.72	68.20	-11.48	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/27
Test Frequency	5210MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

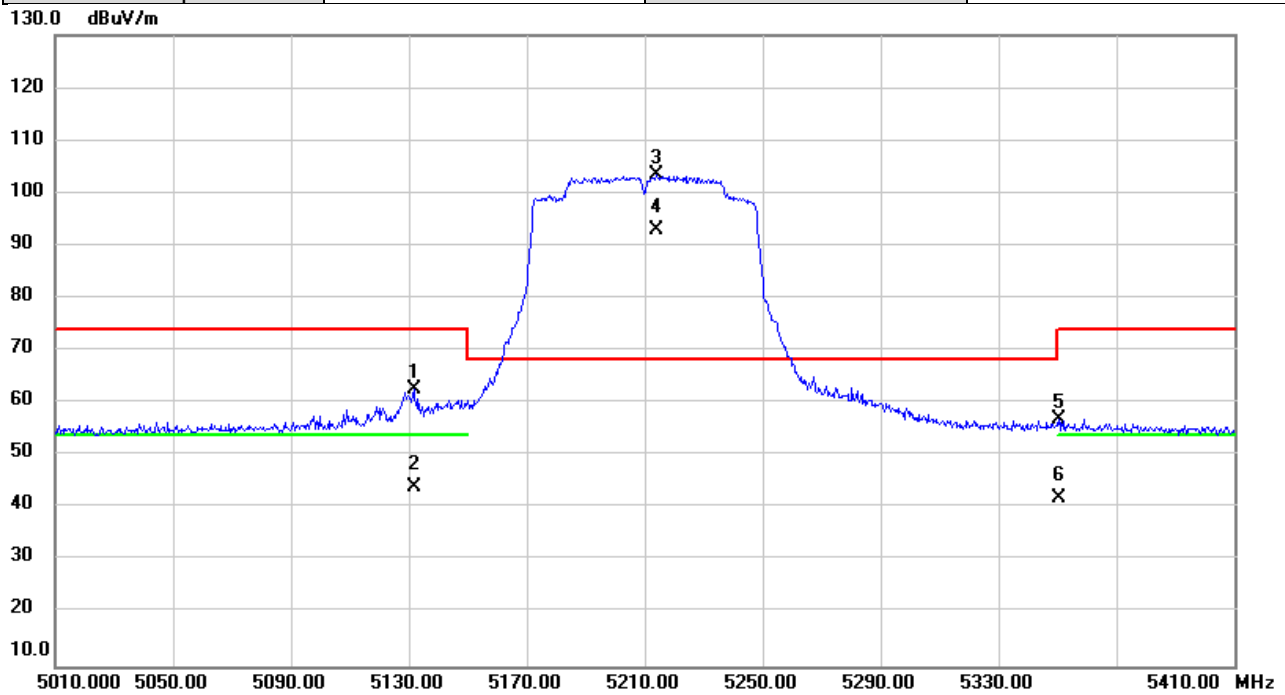


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5131.600	52.28	10.49	62.77	74.00	-11.23	peak	
2		5131.600	33.68	10.49	44.17	54.00	-9.83	AVG	
3	*	5214.000	92.79	10.55	103.34	68.20	35.14	peak	NoLimit
4	X	5214.000	82.45	10.55	93.00	68.20	24.80	AVG	NoLimit
5		5350.400	46.35	10.68	57.03	74.00	-16.97	peak	
6		5350.400	31.40	10.68	42.08	54.00	-11.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/27
Test Frequency	5290MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

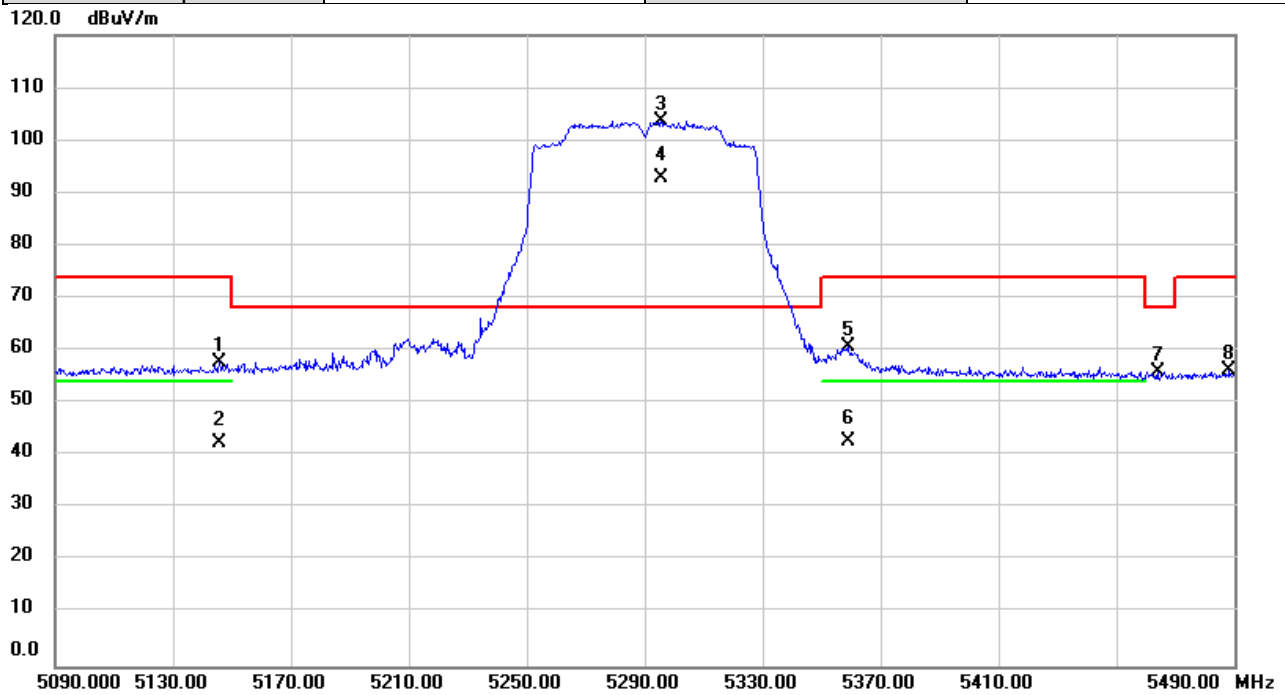


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5145.600	47.20	10.50	57.70	74.00	-16.30	peak	
2		5145.600	31.96	10.50	42.46	54.00	-11.54	AVG	
3	*	5295.600	92.99	10.63	103.62	68.20	35.42	peak	NoLimit
4	X	5295.600	82.35	10.63	92.98	68.20	24.78	AVG	NoLimit
5		5358.800	50.00	10.70	60.70	74.00	-13.30	peak	
6		5358.800	32.07	10.70	42.77	54.00	-11.23	AVG	
7		5464.000	45.24	10.78	56.02	68.20	-12.18	peak	
8		5488.400	45.33	10.80	56.13	74.00	-17.87	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/27
Test Frequency	5530MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

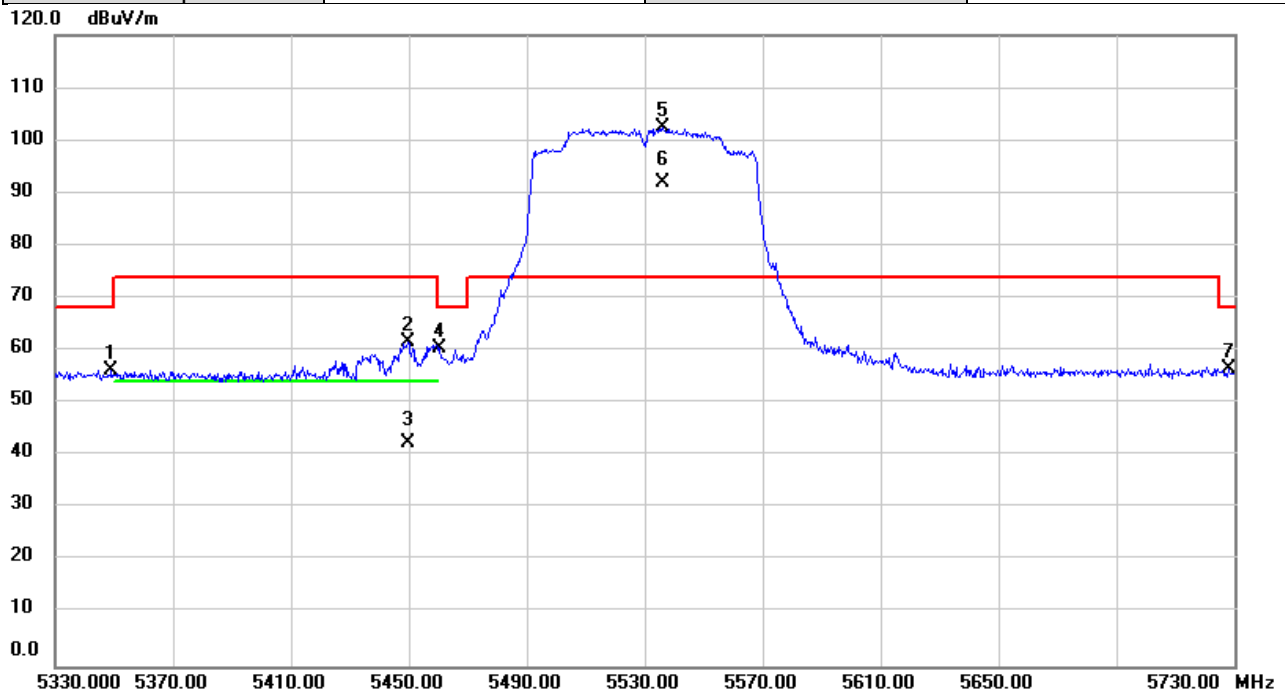


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5349.200	45.64	10.68	56.32	68.20	-11.88	peak	
2		5449.600	50.91	10.77	61.68	74.00	-12.32	peak	
3		5449.600	31.66	10.77	42.43	54.00	-11.57	AVG	
4		5460.400	49.60	10.79	60.39	68.20	-7.81	peak	
5	*	5536.000	91.49	10.88	102.37	74.00	28.37	peak	NoLimit
6	X	5536.000	81.20	10.88	92.08	74.00	18.08	AVG	NoLimit
7		5728.000	45.29	11.19	56.48	68.20	-11.72	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/27
Test Frequency	5610MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

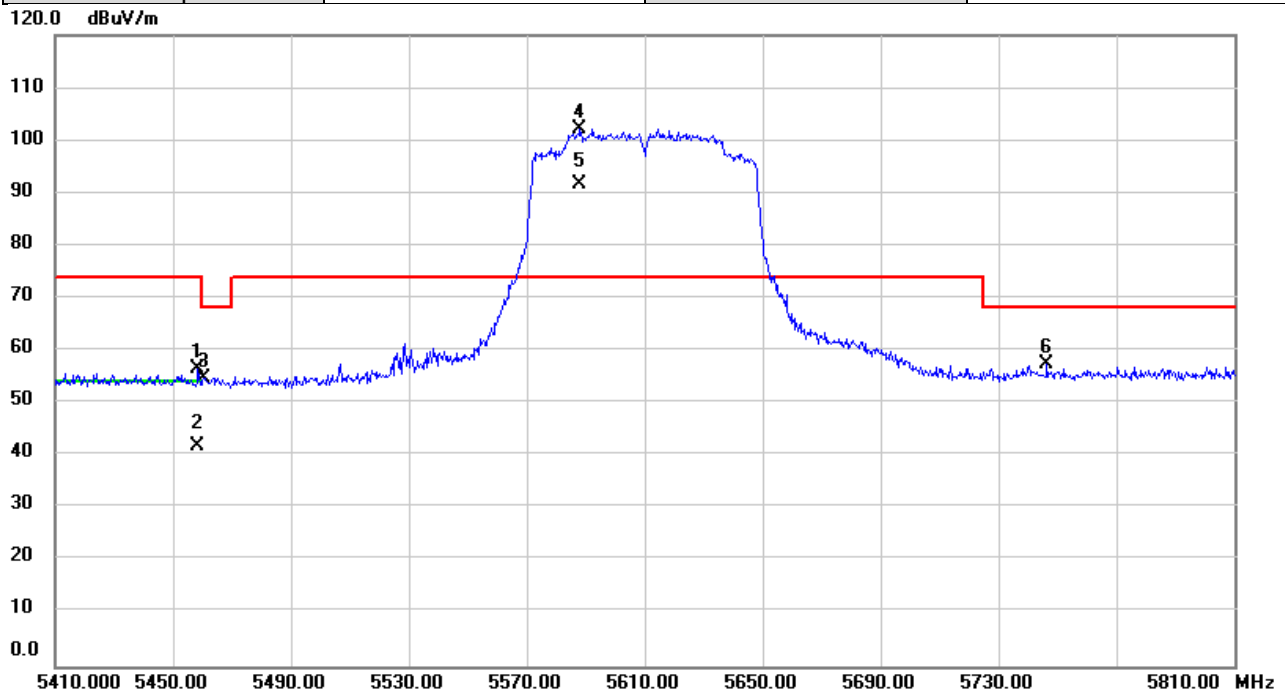


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5458.400	45.85	10.79	56.64	74.00	-17.36	peak	
2		5458.400	31.09	10.79	41.88	54.00	-12.12	AVG	
3		5460.400	44.04	10.79	54.83	68.20	-13.37	peak	
4	*	5588.000	91.26	10.96	102.22	74.00	28.22	peak	NoLimit
5	X	5588.000	80.73	10.96	91.69	74.00	17.69	AVG	NoLimit
6		5746.400	46.34	11.22	57.56	68.20	-10.64	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/27
Test Frequency	5690MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

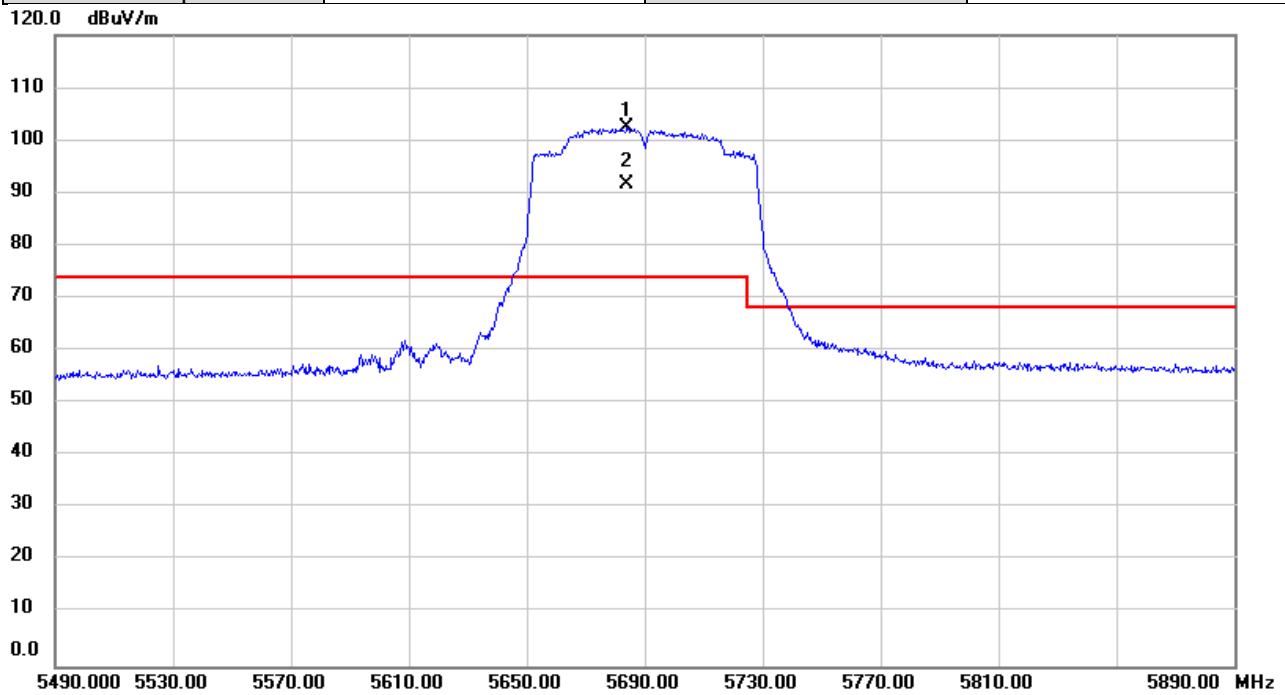


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5684.000	91.43	11.12	102.55	74.00	28.55	peak	NoLimit
2	X	5684.000	80.67	11.12	91.79	74.00	17.79	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/27
Test Frequency	5775MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

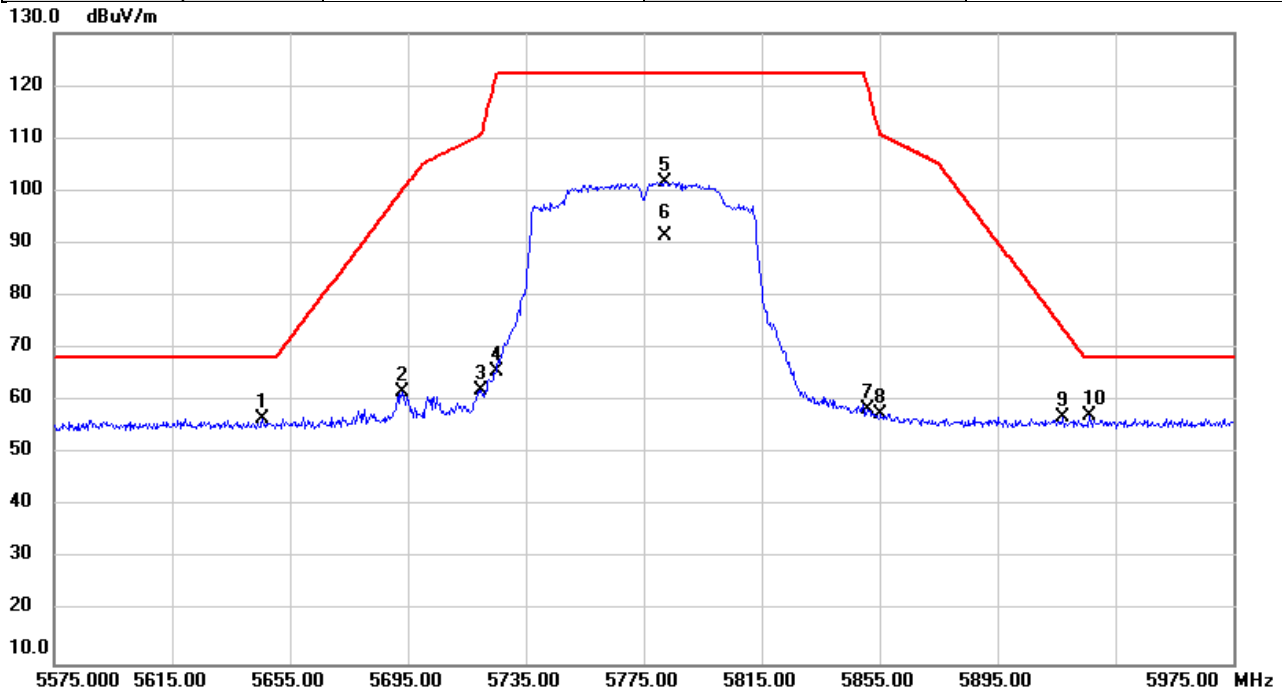


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5645.800	45.62	11.05	56.67	68.20	-11.53	peak	
2		5693.000	50.71	11.13	61.84	100.04	-38.20	peak	
3		5719.800	50.86	11.19	62.05	110.74	-48.69	peak	
4		5725.000	54.47	11.20	65.67	122.20	-56.53	peak	
5		5782.200	90.37	11.28	101.65	122.20	-20.55	peak	NoLimit
6		5782.200	80.16	11.28	91.44	122.20	-30.76	AVG	NoLimit
7		5851.000	47.08	11.39	58.47	119.92	-61.45	peak	
8		5855.400	46.27	11.41	57.68	110.69	-53.01	peak	
9		5917.400	45.48	11.50	56.98	73.80	-16.82	peak	
10	*	5926.200	45.64	11.52	57.16	68.20	-11.04	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2025/12/27
Test Frequency	5250MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

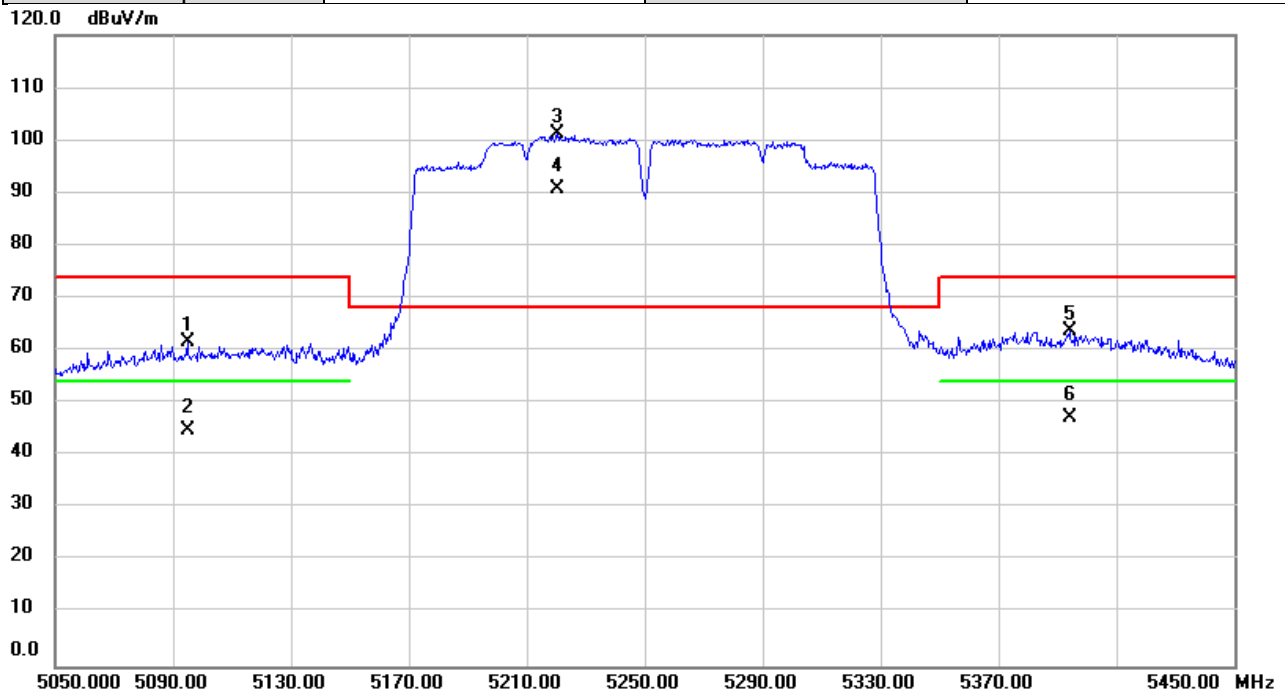


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5094.800	51.23	10.45	61.68	74.00	-12.32	peak	
2		5094.800	34.42	10.45	44.87	54.00	-9.13	AVG	
3	*	5220.400	90.82	10.56	101.38	68.20	33.18	peak	NoLimit
4	X	5220.400	80.18	10.56	90.74	68.20	22.54	AVG	NoLimit
5		5394.000	53.05	10.72	63.77	74.00	-10.23	peak	
6		5394.000	36.41	10.72	47.13	54.00	-6.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2025/12/27
Test Frequency	5570MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

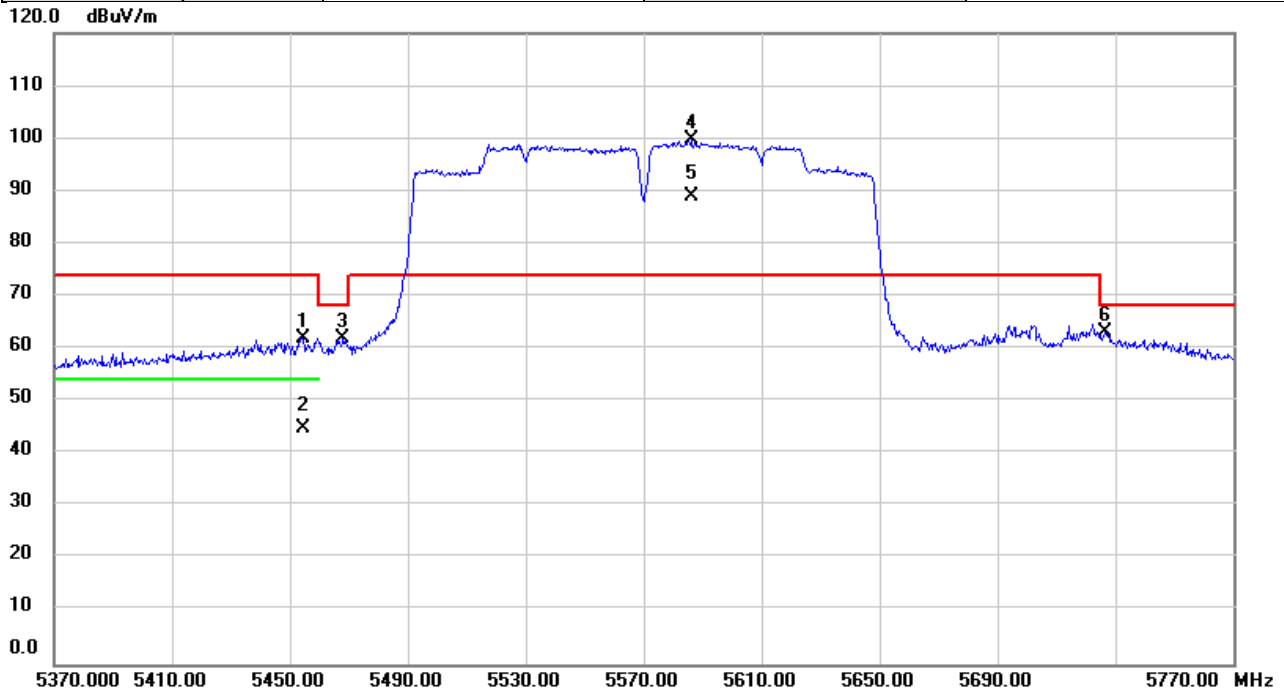


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5454.400	51.14	10.78	61.92	74.00	-12.08	peak	
2		5454.400	34.09	10.78	44.87	54.00	-9.13	AVG	
3		5468.000	51.11	10.78	61.89	68.20	-6.31	peak	
4	*	5586.000	88.87	10.96	99.83	74.00	25.83	peak	NoLimit
5	X	5586.000	77.97	10.96	88.93	74.00	14.93	AVG	NoLimit
6		5726.400	51.88	11.19	63.07	68.20	-5.13	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/27
Test Frequency	5180MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

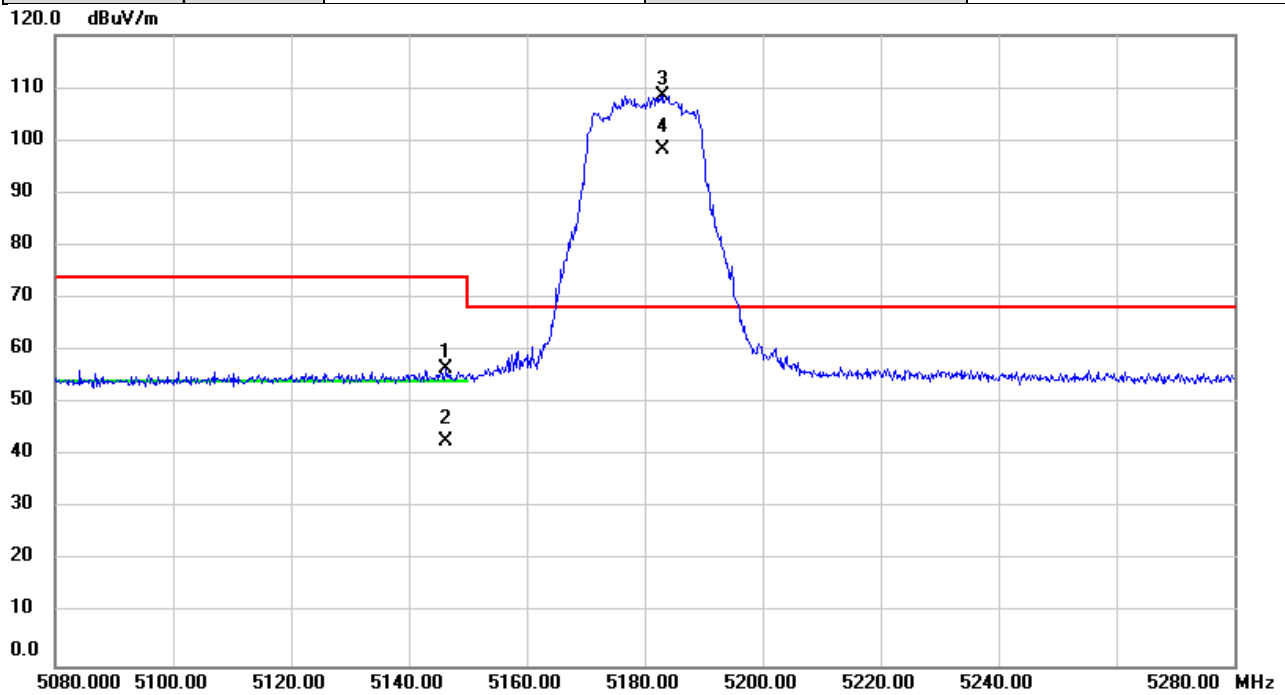


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5146.400	45.91	10.50	56.41	74.00	-17.59	peak	
2		5146.400	32.26	10.50	42.76	54.00	-11.24	AVG	
3	*	5183.200	98.00	10.54	108.54	68.20	40.34	peak	NoLimit
4	X	5183.200	87.72	10.54	98.26	68.20	30.06	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/27
Test Frequency	5240MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

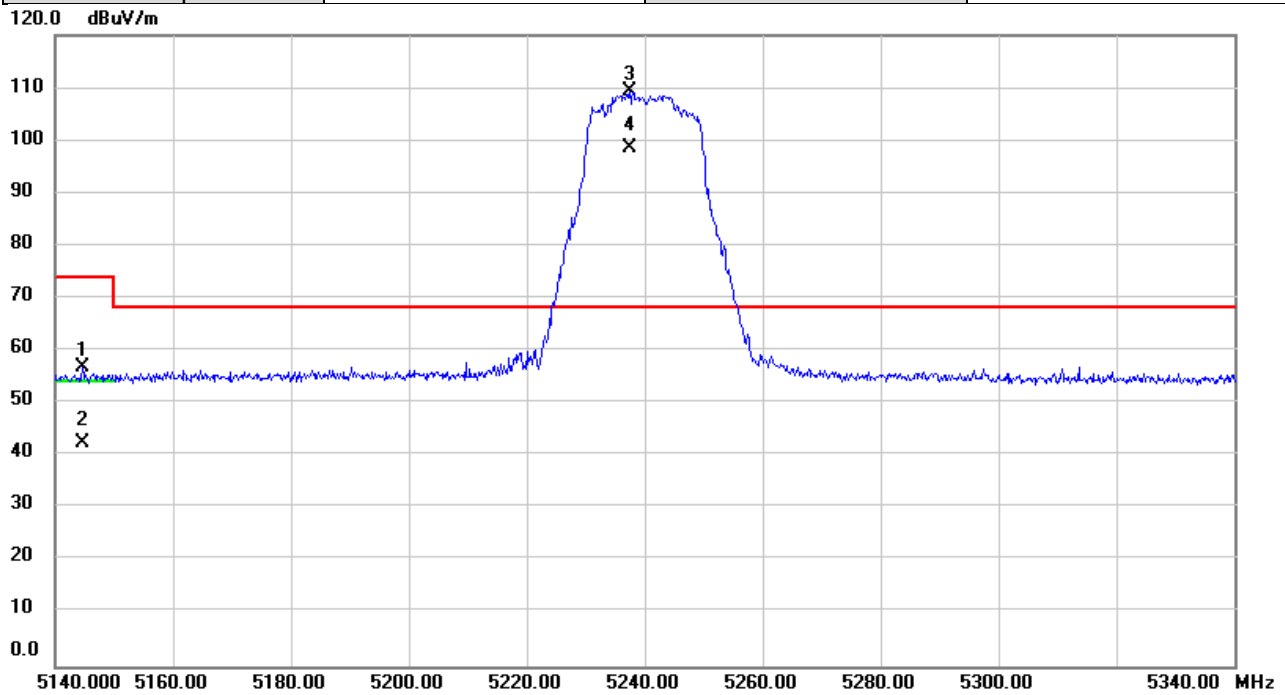


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5144.600	46.24	10.50	56.74	74.00	-17.26	peak	
2		5144.600	31.87	10.50	42.37	54.00	-11.63	AVG	
3	*	5237.400	98.69	10.58	109.27	68.20	41.07	peak	NoLimit
4	X	5237.400	87.92	10.58	98.50	68.20	30.30	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/27
Test Frequency	5260MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

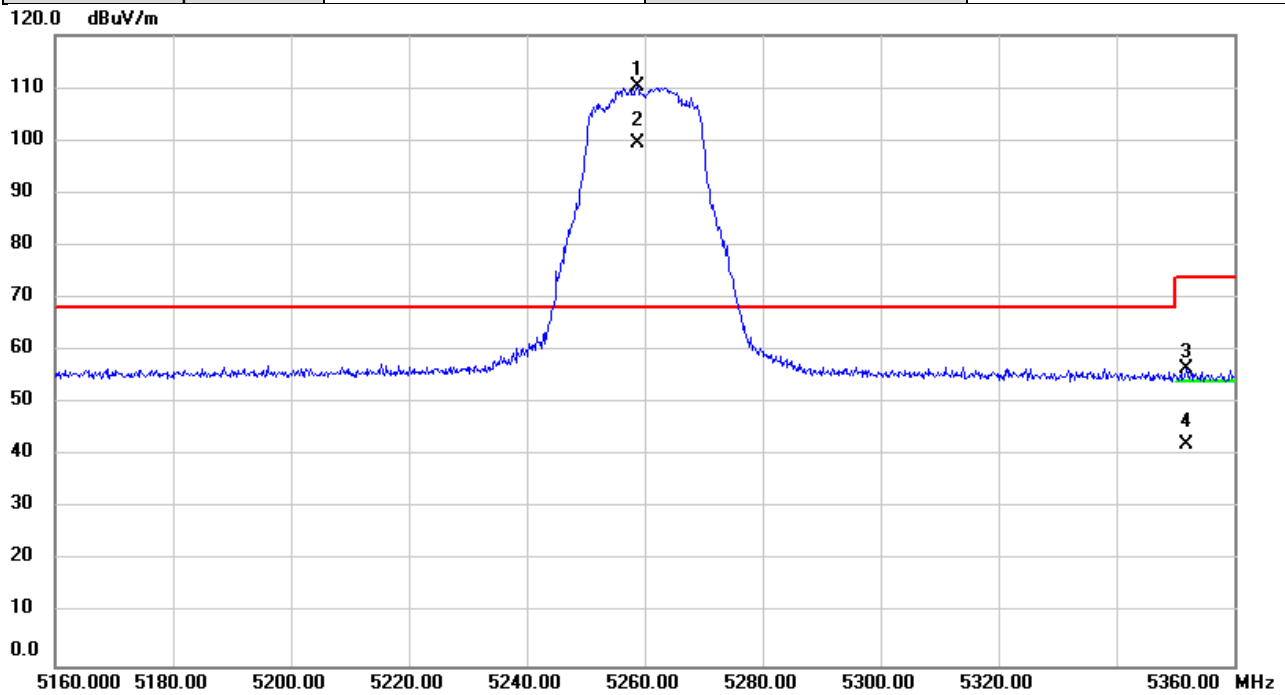


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5258.800	99.74	10.60	110.34	68.20	42.14	peak	NoLimit
2	X	5258.800	88.93	10.60	99.53	68.20	31.33	AVG	NoLimit
3		5351.800	45.80	10.68	56.48	74.00	-17.52	peak	
4		5351.800	31.33	10.68	42.01	54.00	-11.99	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/27
Test Frequency	5320MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

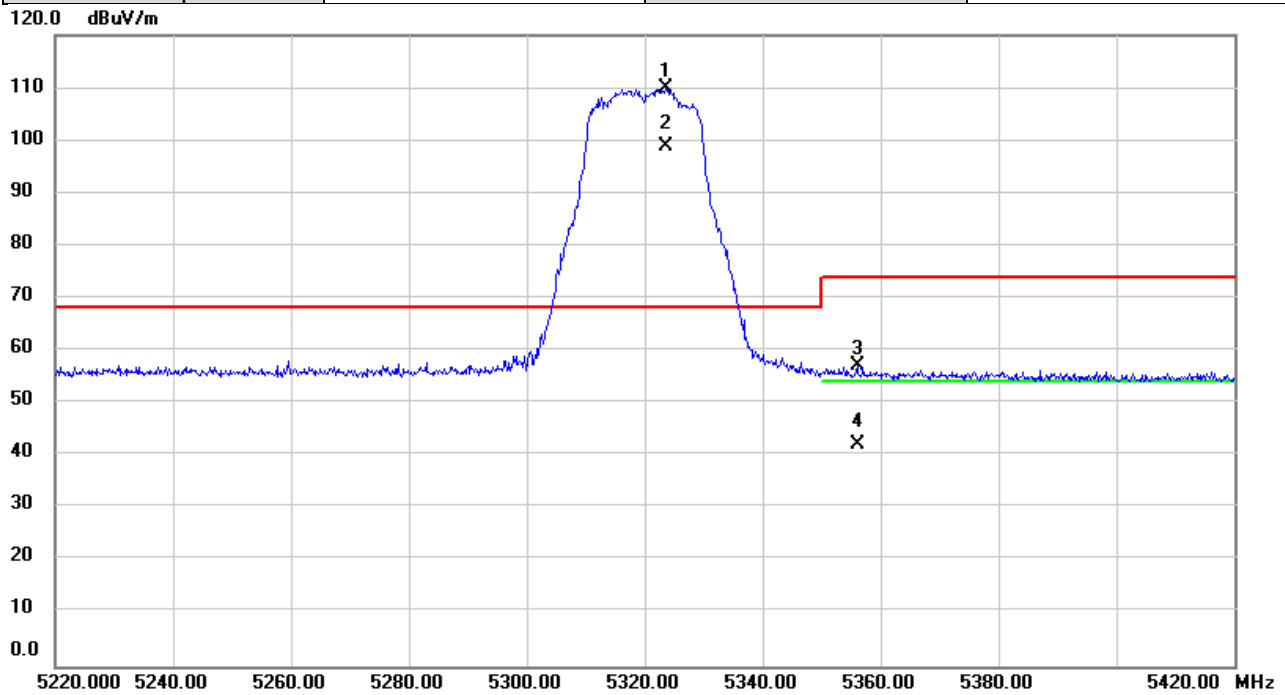


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5323.600	99.37	10.66	110.03	68.20	41.83	peak	NoLimit
2	X	5323.600	88.30	10.66	98.96	68.20	30.76	AVG	NoLimit
3		5356.000	46.49	10.69	57.18	74.00	-16.82	peak	
4		5356.000	31.59	10.69	42.28	54.00	-11.72	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/27
Test Frequency	5500MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

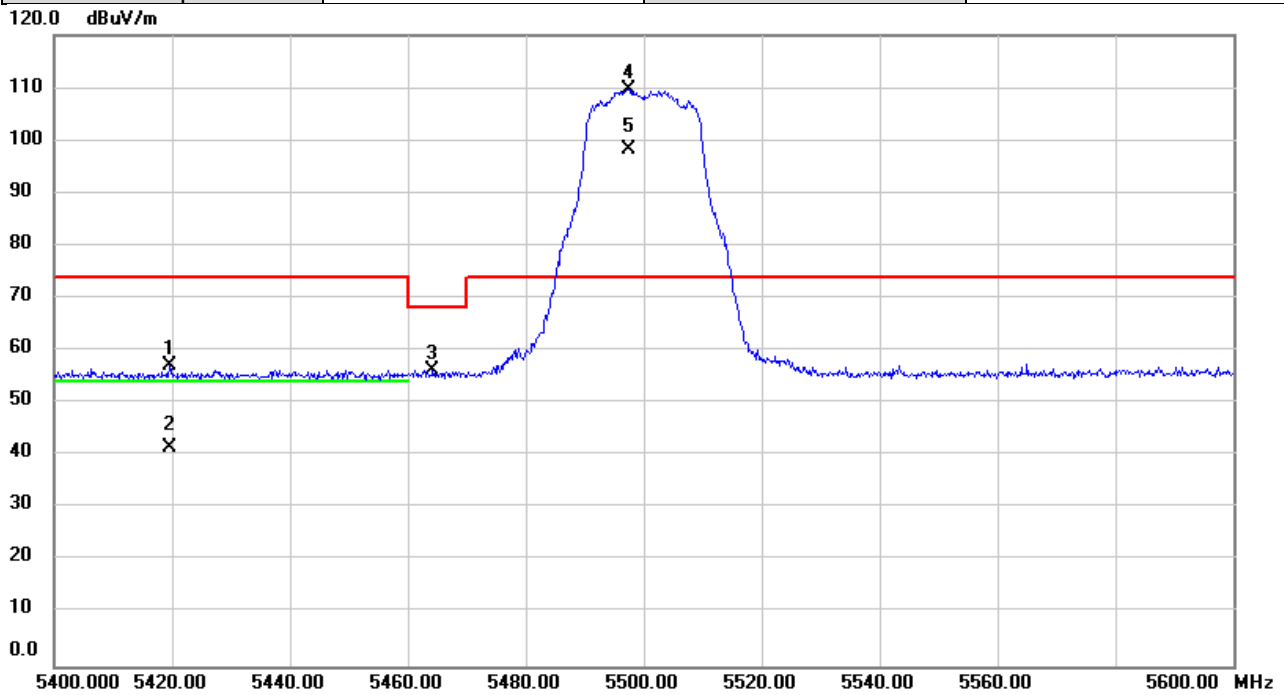


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5419.600	46.30	10.75	57.05	74.00	-16.95	peak	
2		5419.600	30.86	10.75	41.61	54.00	-12.39	AVG	
3		5464.200	45.56	10.78	56.34	68.20	-11.86	peak	
4	*	5497.400	98.96	10.82	109.78	74.00	35.78	peak	NoLimit
5	X	5497.400	87.40	10.82	98.22	74.00	24.22	AVG	NoLimit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/27
Test Frequency	5700MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

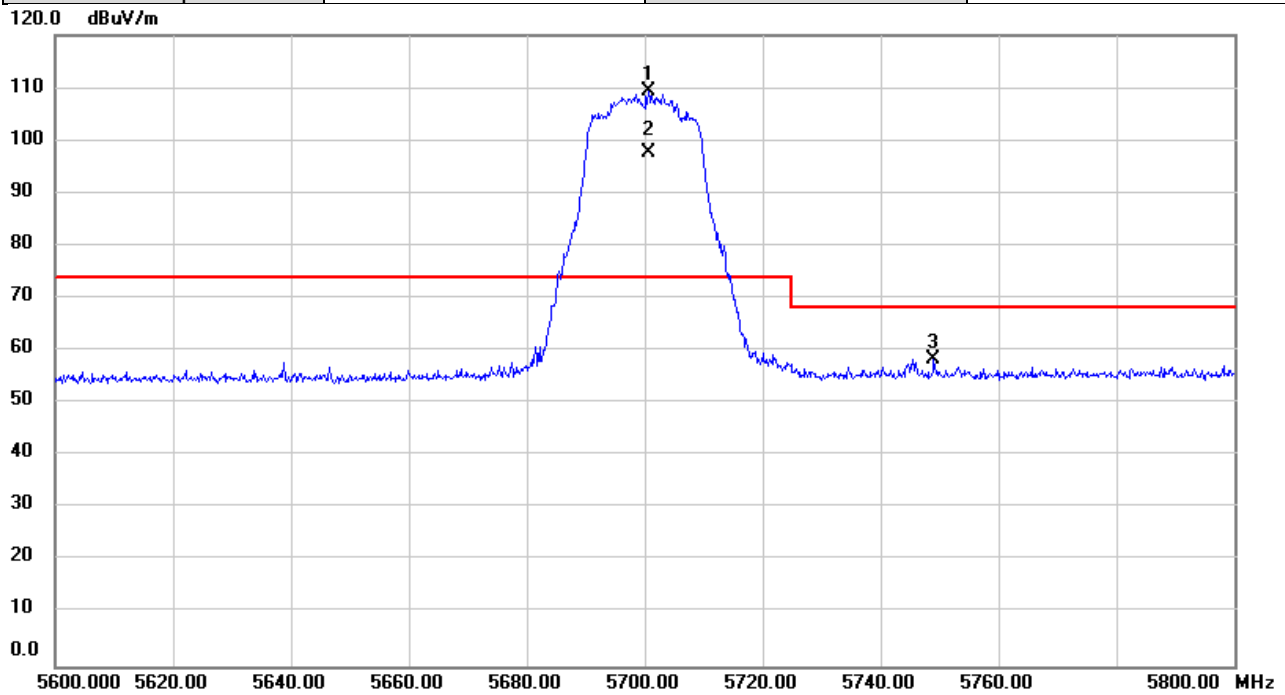


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5700.600	98.06	11.15	109.21	74.00	35.21	peak	NoLimit
2	X	5700.600	86.56	11.15	97.71	74.00	23.71	AVG	NoLimit
3		5749.000	47.06	11.23	58.29	68.20	-9.91	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/27
Test Frequency	5720MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

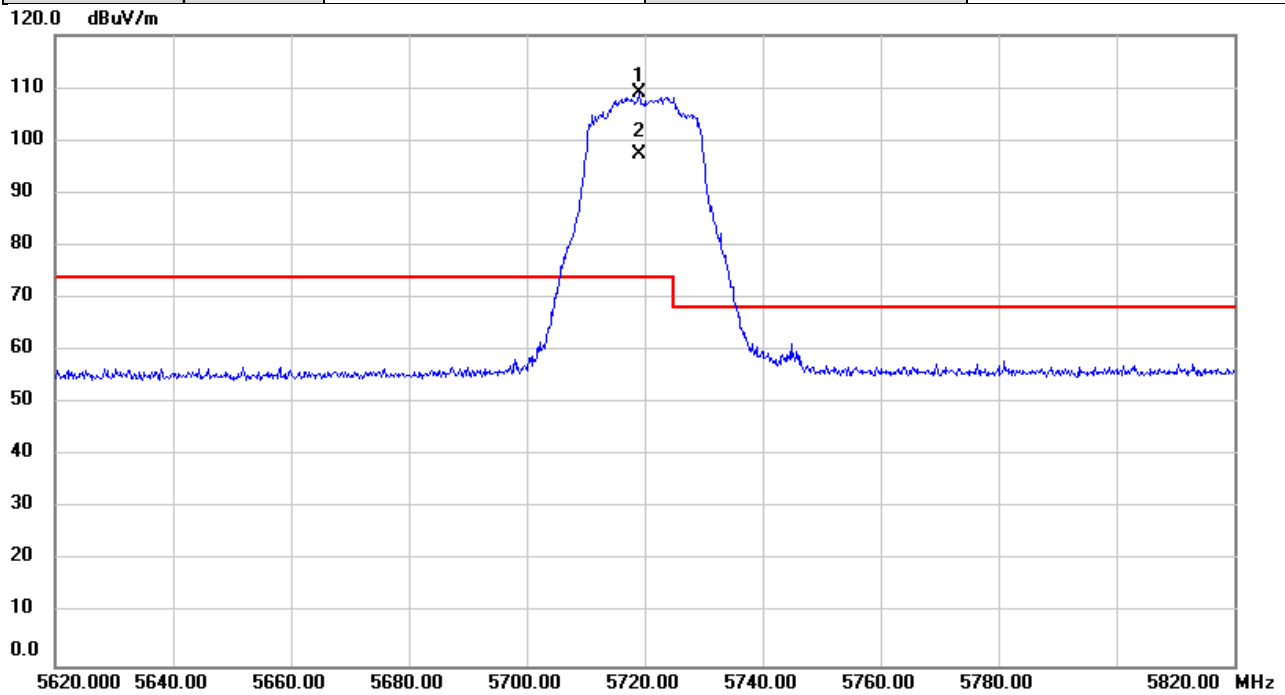


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5719.200	97.85	11.19	109.04	74.00	35.04	peak	NoLimit
2	X	5719.200	86.31	11.19	97.50	74.00	23.50	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/27
Test Frequency	5745MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

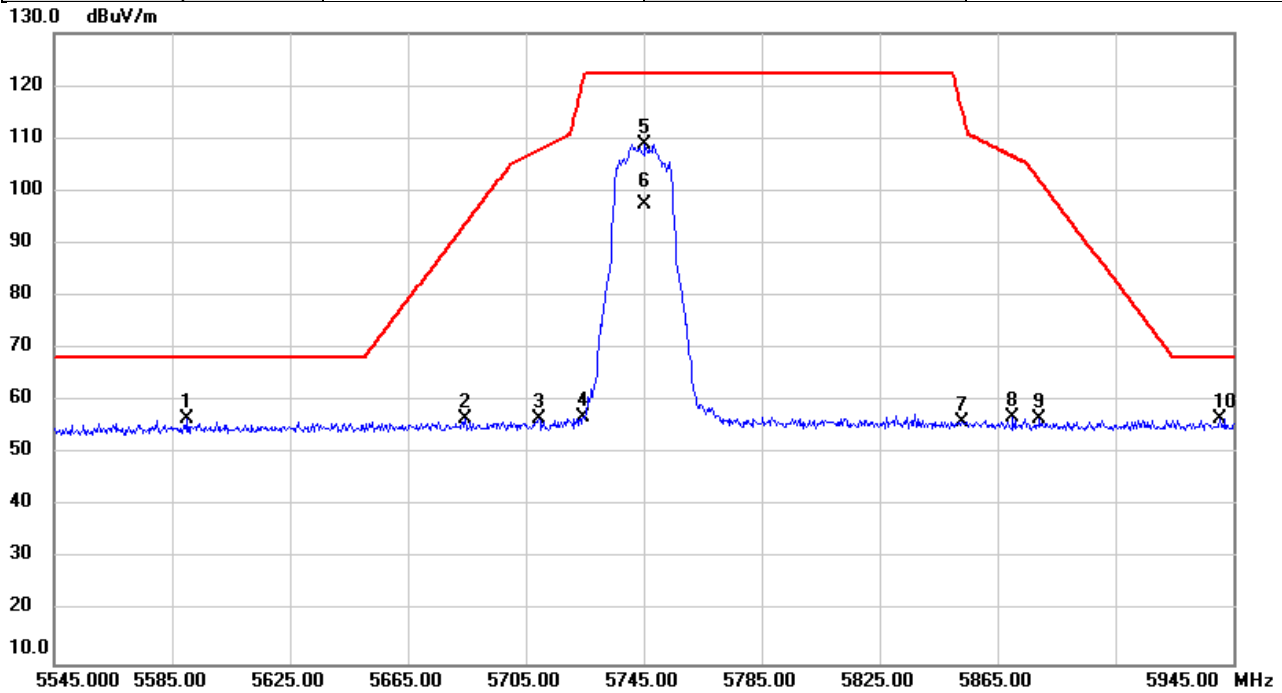


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5590.200	45.71	10.97	56.68	68.20	-11.52	peak	
2		5684.600	45.53	11.12	56.65	93.84	-37.19	peak	
3		5709.400	45.42	11.16	56.58	107.83	-51.25	peak	
4		5724.600	45.79	11.19	56.98	121.29	-64.31	peak	
5		5745.400	97.69	11.22	108.91	122.20	-13.29	peak	NoLimit
6		5745.400	86.34	11.22	97.56	122.20	-24.64	AVG	NoLimit
7		5853.000	44.76	11.40	56.16	115.36	-59.20	peak	
8		5870.200	45.52	11.43	56.95	106.54	-49.59	peak	
9		5879.400	45.22	11.44	56.66	101.93	-45.27	peak	
10		5940.600	45.12	11.54	56.66	68.20	-11.54	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/27
Test Frequency	5825MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

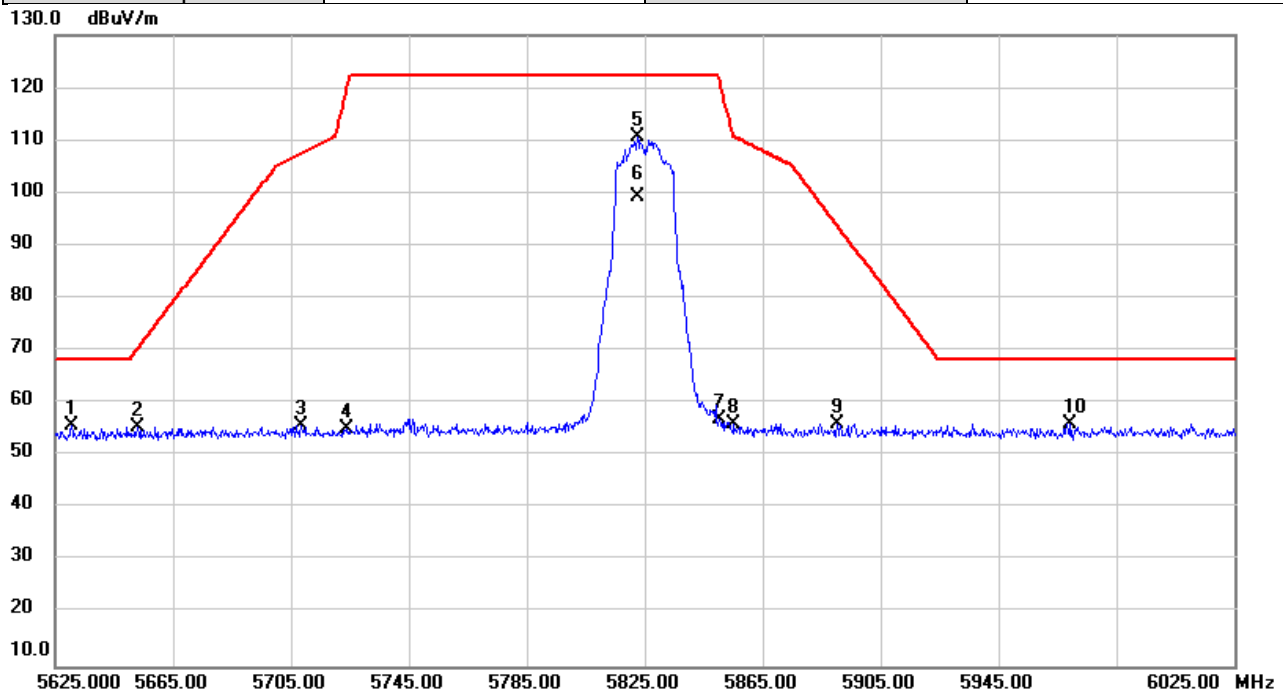


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5630.600	44.63	11.03	55.66	68.20	-12.54	peak	
2		5653.000	44.44	11.07	55.51	70.43	-14.92	peak	
3		5708.600	44.70	11.16	55.86	107.61	-51.75	peak	
4		5724.200	44.07	11.19	55.26	120.38	-65.12	peak	
5	*	5822.600	99.18	11.35	110.53	122.20	-11.67	peak	NoLimit
6		5822.600	88.01	11.35	99.36	122.20	-22.84	AVG	NoLimit
7		5850.200	45.47	11.39	56.86	121.74	-64.88	peak	
8		5855.400	44.67	11.41	56.08	110.69	-54.61	peak	
9		5890.200	44.71	11.46	56.17	93.92	-37.75	peak	
10		5969.400	44.51	11.60	56.11	68.20	-12.09	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/27
Test Frequency	5190MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

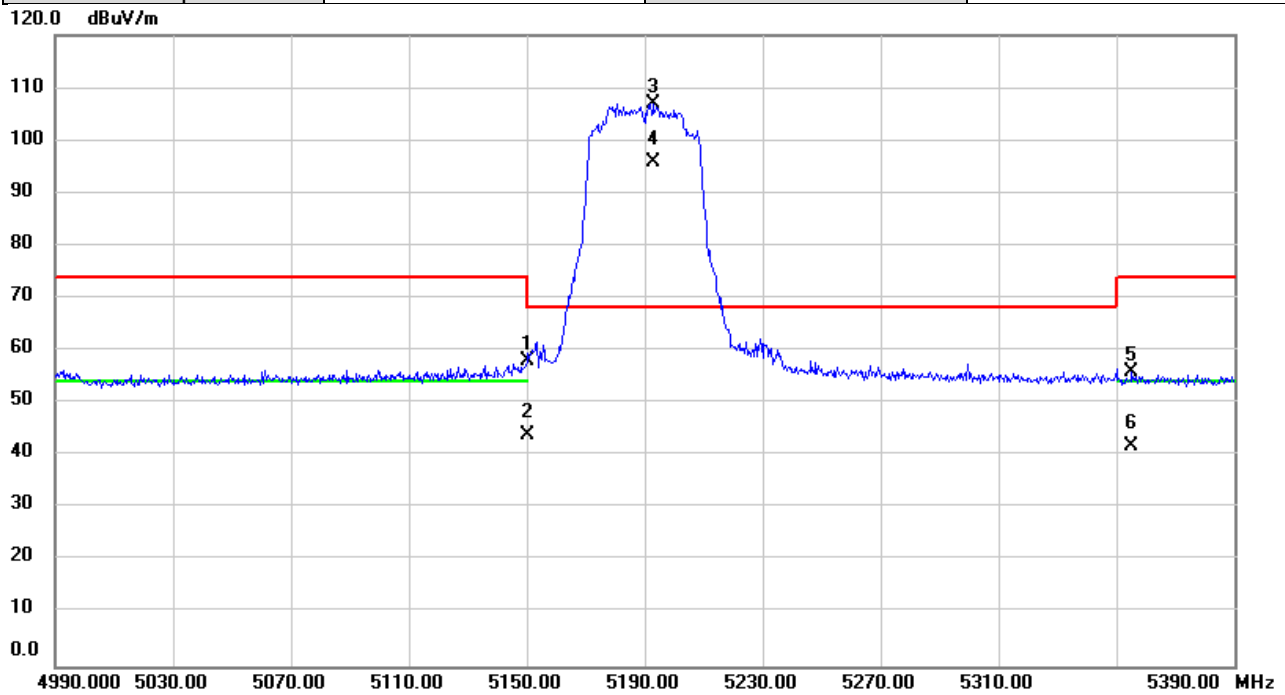


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	47.67	10.50	58.17	68.20	-10.03	peak	
2		5150.000	33.55	10.50	44.05	54.00	-9.95	AVG	
3	*	5192.800	96.51	10.53	107.04	68.20	38.84	peak	NoLimit
4	X	5192.800	85.27	10.53	95.80	68.20	27.60	AVG	NoLimit
5		5355.200	45.24	10.68	55.92	74.00	-18.08	peak	
6		5355.200	31.06	10.68	41.74	54.00	-12.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/27
Test Frequency	5230MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

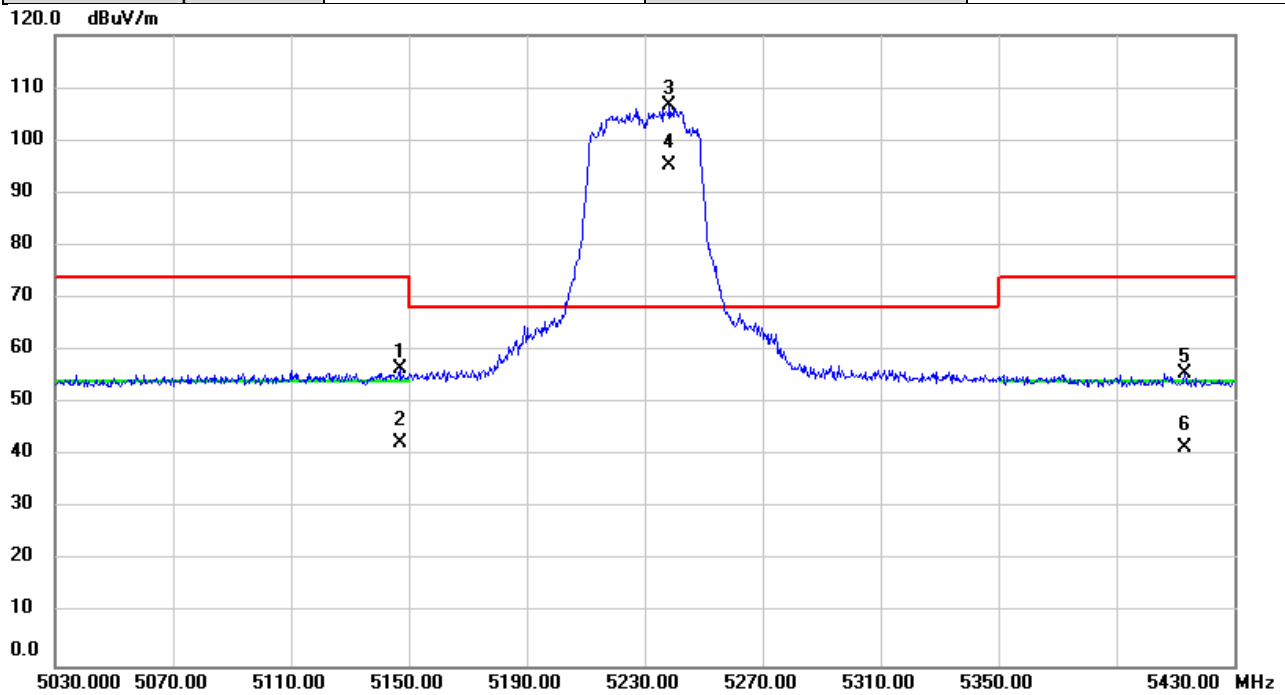


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5146.800	45.97	10.50	56.47	74.00	-17.53	peak	
2		5146.800	31.92	10.50	42.42	54.00	-11.58	AVG	
3	*	5238.400	96.21	10.57	106.78	68.20	38.58	peak	NoLimit
4	X	5238.400	84.55	10.57	95.12	68.20	26.92	AVG	NoLimit
5		5413.200	44.95	10.73	55.68	74.00	-18.32	peak	
6		5413.200	30.83	10.73	41.56	54.00	-12.44	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/27
Test Frequency	5270MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

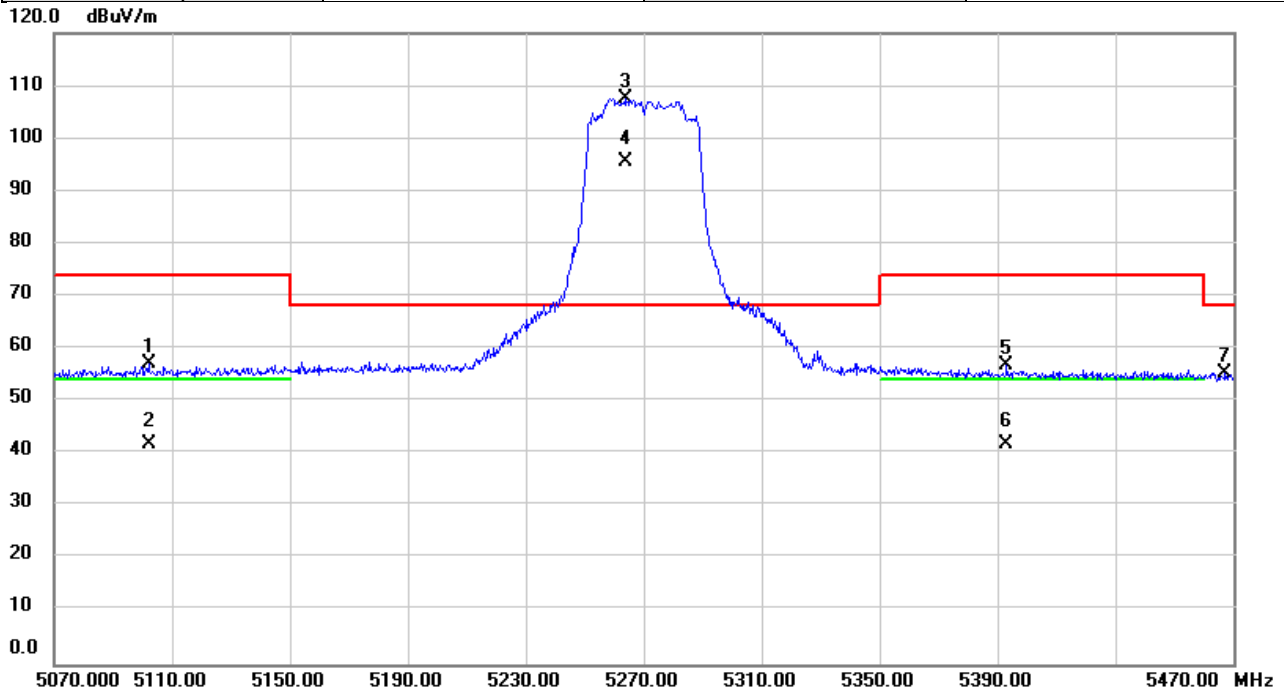


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5102.000	46.83	10.45	57.28	74.00	-16.72	peak	
2		5102.000	31.51	10.45	41.96	54.00	-12.04	AVG	
3	*	5264.000	97.06	10.60	107.66	68.20	39.46	peak	NoLimit
4	X	5264.000	85.07	10.60	95.67	68.20	27.47	AVG	NoLimit
5		5393.200	46.20	10.71	56.91	74.00	-17.09	peak	
6		5393.200	31.01	10.71	41.72	54.00	-12.28	AVG	
7		5467.200	44.57	10.78	55.35	68.20	-12.85	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/27
Test Frequency	5310MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

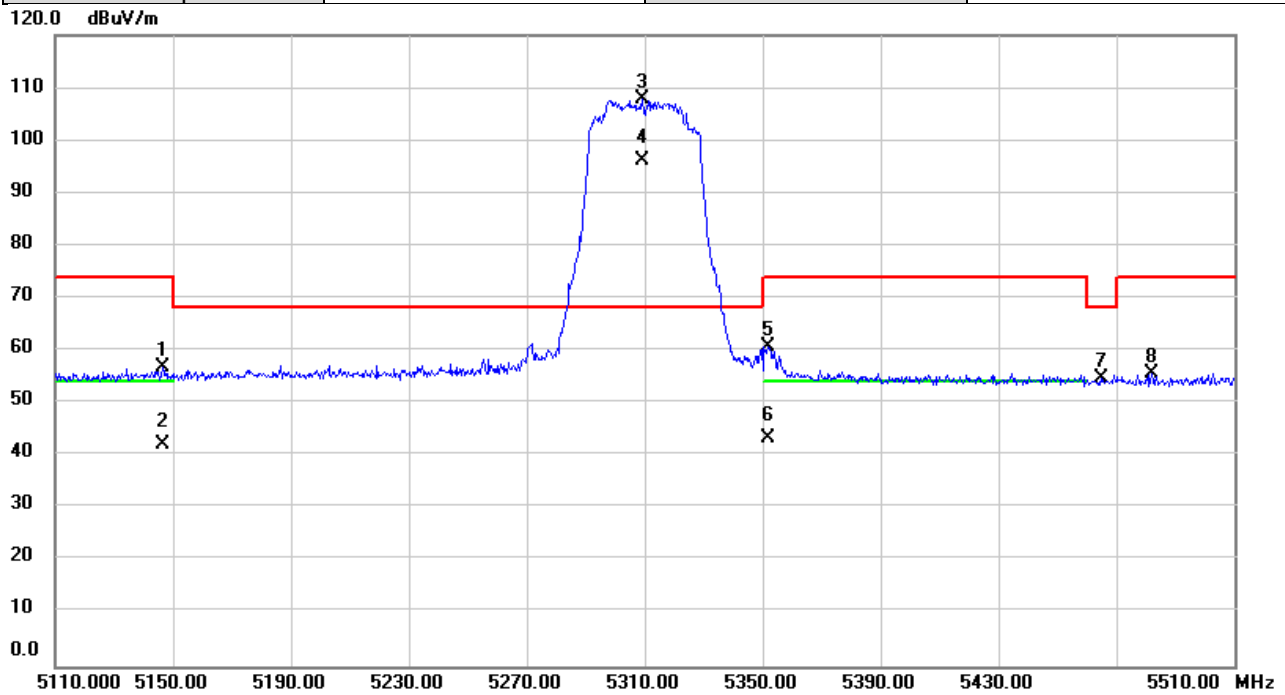


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5146.400	46.43	10.50	56.93	74.00	-17.07	peak	
2		5146.400	31.74	10.50	42.24	54.00	-11.76	AVG	
3	*	5309.200	97.06	10.65	107.71	68.20	39.51	peak	NoLimit
4	X	5309.200	85.64	10.65	96.29	68.20	28.09	AVG	NoLimit
5		5352.000	50.01	10.68	60.69	74.00	-13.31	peak	
6		5352.000	32.67	10.68	43.35	54.00	-10.65	AVG	
7		5464.800	43.99	10.78	54.77	68.20	-13.43	peak	
8		5482.000	44.98	10.81	55.79	74.00	-18.21	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/27
Test Frequency	5510MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

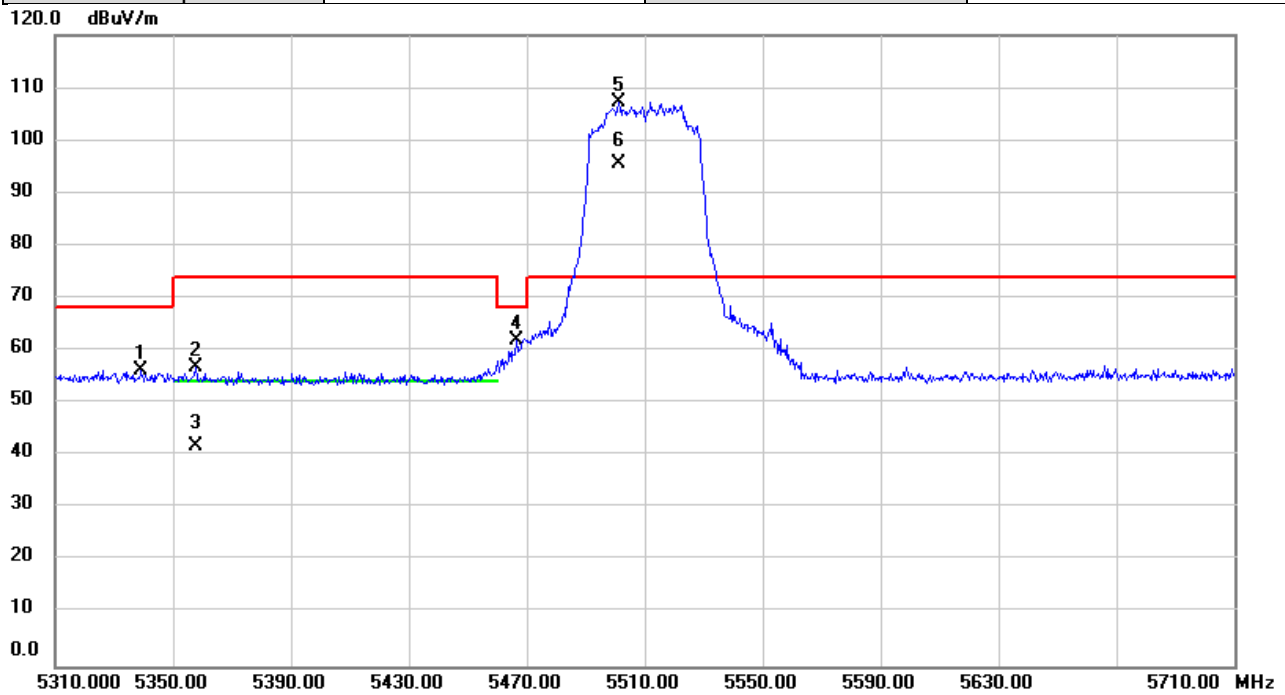


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5339.200	45.69	10.67	56.36	68.20	-11.84	peak	
2		5357.600	46.11	10.70	56.81	74.00	-17.19	peak	
3		5357.600	31.03	10.70	41.73	54.00	-12.27	AVG	
4		5466.400	51.22	10.78	62.00	68.20	-6.20	peak	
5	*	5501.200	96.52	10.82	107.34	74.00	33.34	peak	NoLimit
6	X	5501.200	84.87	10.82	95.69	74.00	21.69	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/27
Test Frequency	5670MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

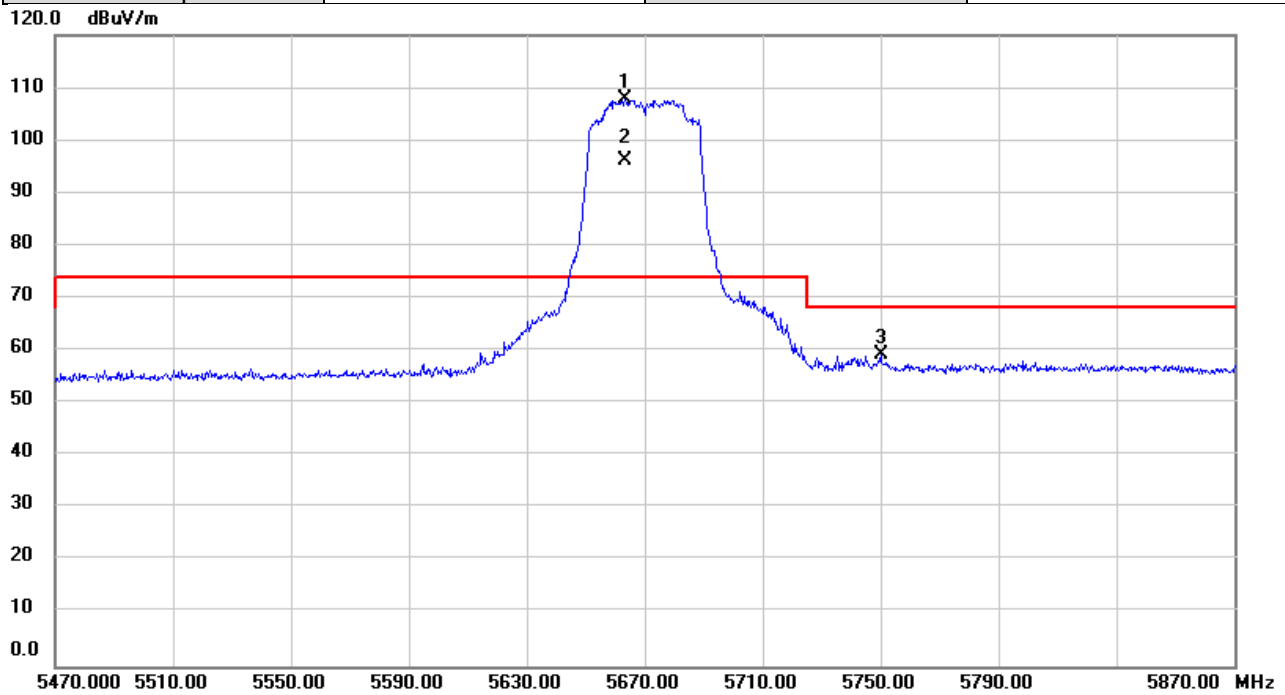


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5663.200	96.68	11.09	107.77	74.00	33.77	peak	NoLimit
2	X	5663.200	85.00	11.09	96.09	74.00	22.09	AVG	NoLimit
3		5750.000	47.89	11.23	59.12	68.20	-9.08	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/27
Test Frequency	5710MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

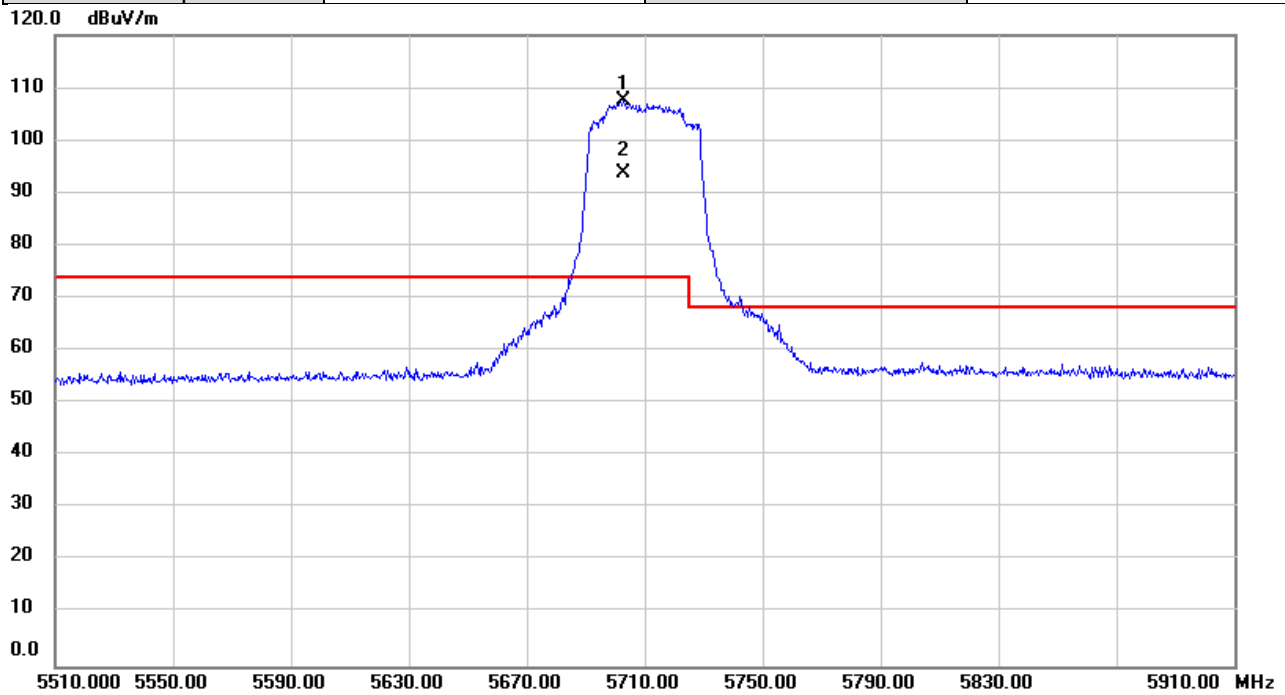


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5702.800	96.48	11.15	107.63	74.00	33.63	peak	NoLimit
2	X	5702.800	82.48	11.15	93.63	74.00	19.63	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/27
Test Frequency	5755MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

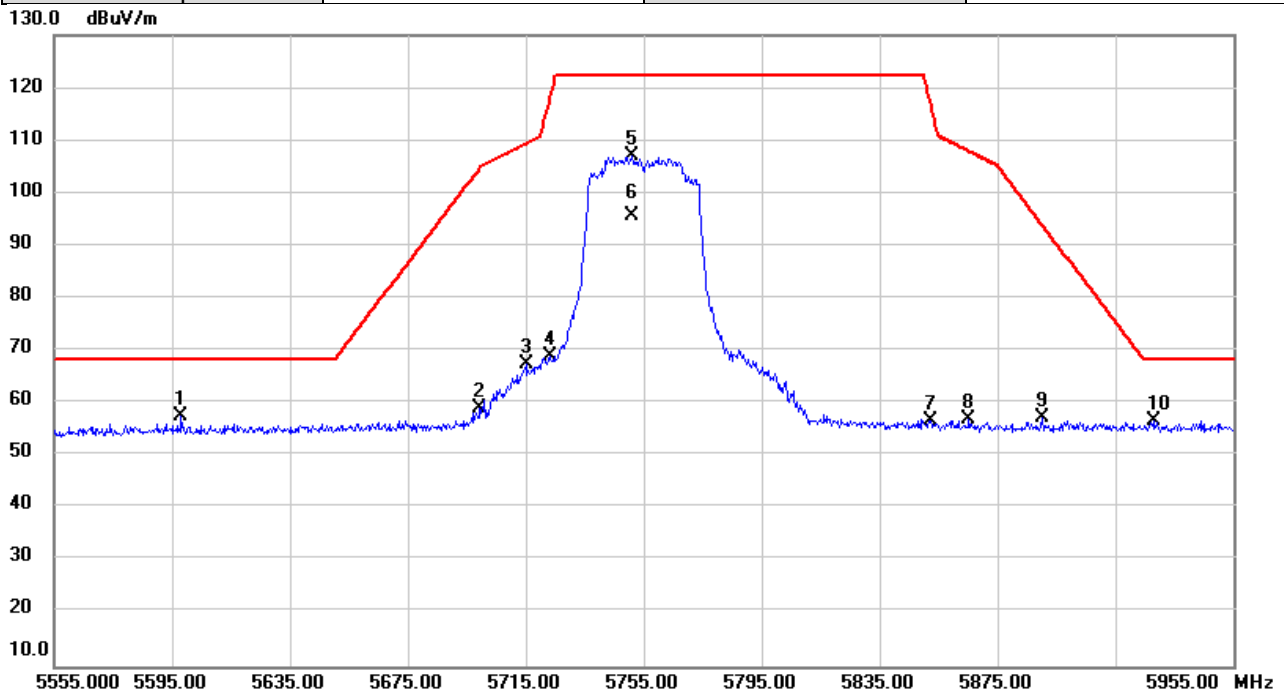


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5598.200	46.56	10.98	57.54	68.20	-10.66	peak	
2		5699.400	47.82	11.15	58.97	104.76	-45.79	peak	
3		5715.000	56.16	11.17	67.33	109.40	-42.07	peak	
4		5723.000	57.89	11.19	69.08	117.64	-48.56	peak	
5		5751.000	95.85	11.23	107.08	122.20	-15.12	peak	NoLimit
6		5751.000	84.46	11.23	95.69	122.20	-26.51	AVG	NoLimit
7		5852.200	45.28	11.39	56.67	117.18	-60.51	peak	
8		5865.400	45.40	11.42	56.82	107.89	-51.07	peak	
9		5890.200	45.89	11.46	57.35	93.92	-36.57	peak	
10		5927.800	45.17	11.52	56.69	68.20	-11.51	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/27
Test Frequency	5795MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

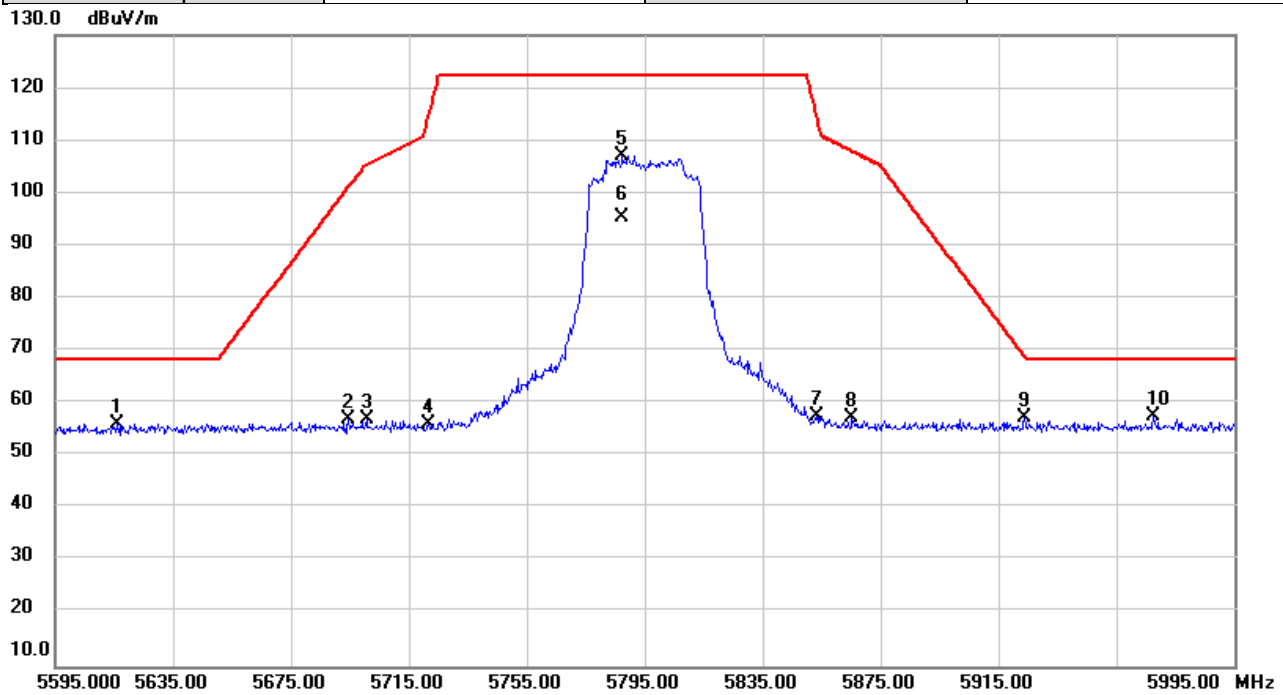


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5615.800	45.17	11.01	56.18	68.20	-12.02	peak	
2		5694.600	45.67	11.14	56.81	101.22	-44.41	peak	
3		5700.600	45.69	11.15	56.84	105.37	-48.53	peak	
4		5721.800	44.99	11.19	56.18	114.91	-58.73	peak	
5		5787.400	95.82	11.29	107.11	122.20	-15.09	peak	NoLimit
6		5787.400	84.21	11.29	95.50	122.20	-26.70	AVG	NoLimit
7		5853.400	46.29	11.40	57.69	114.45	-56.76	peak	
8		5865.400	45.88	11.42	57.30	107.89	-50.59	peak	
9		5923.800	45.69	11.52	57.21	69.08	-11.87	peak	
10	*	5967.400	45.93	11.59	57.52	68.20	-10.68	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/27
Test Frequency	5210MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

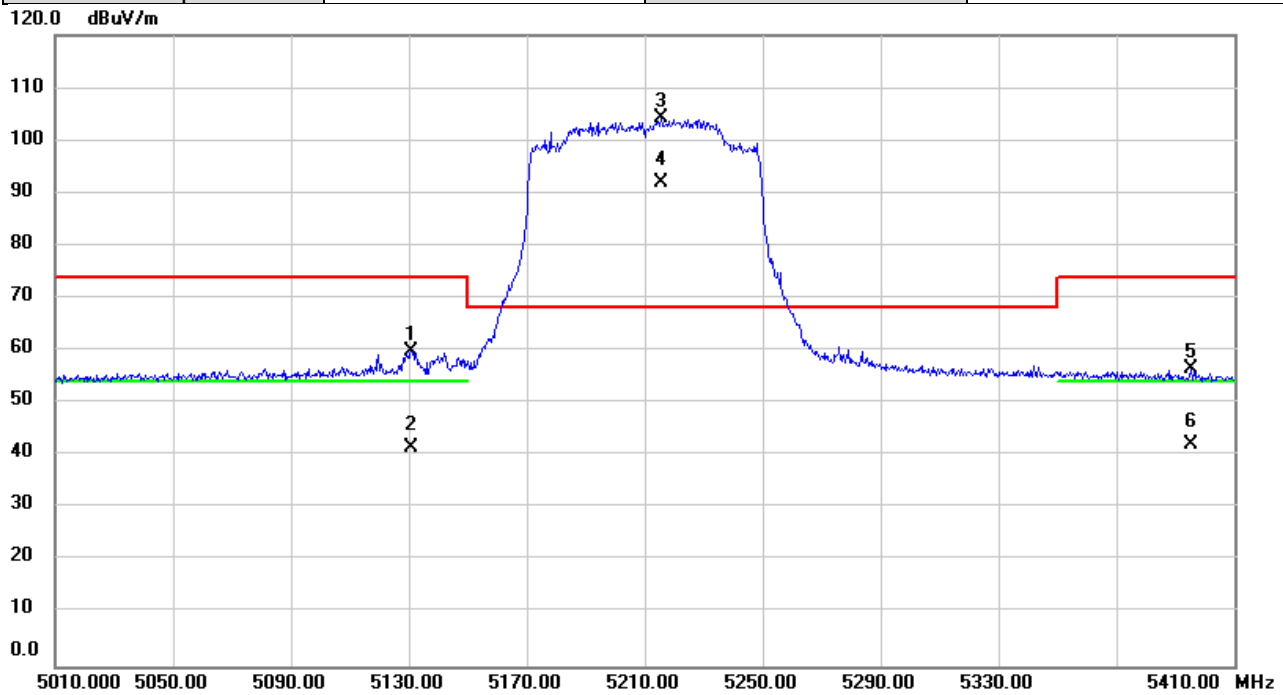


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5130.800	49.49	10.48	59.97	74.00	-14.03	peak	
2		5130.800	31.20	10.48	41.68	54.00	-12.32	AVG	
3	*	5215.600	93.60	10.55	104.15	68.20	35.95	peak	NoLimit
4	X	5215.600	81.36	10.55	91.91	68.20	23.71	AVG	NoLimit
5		5395.200	45.93	10.73	56.66	74.00	-17.34	peak	
6		5395.200	31.42	10.73	42.15	54.00	-11.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/27
Test Frequency	5290MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

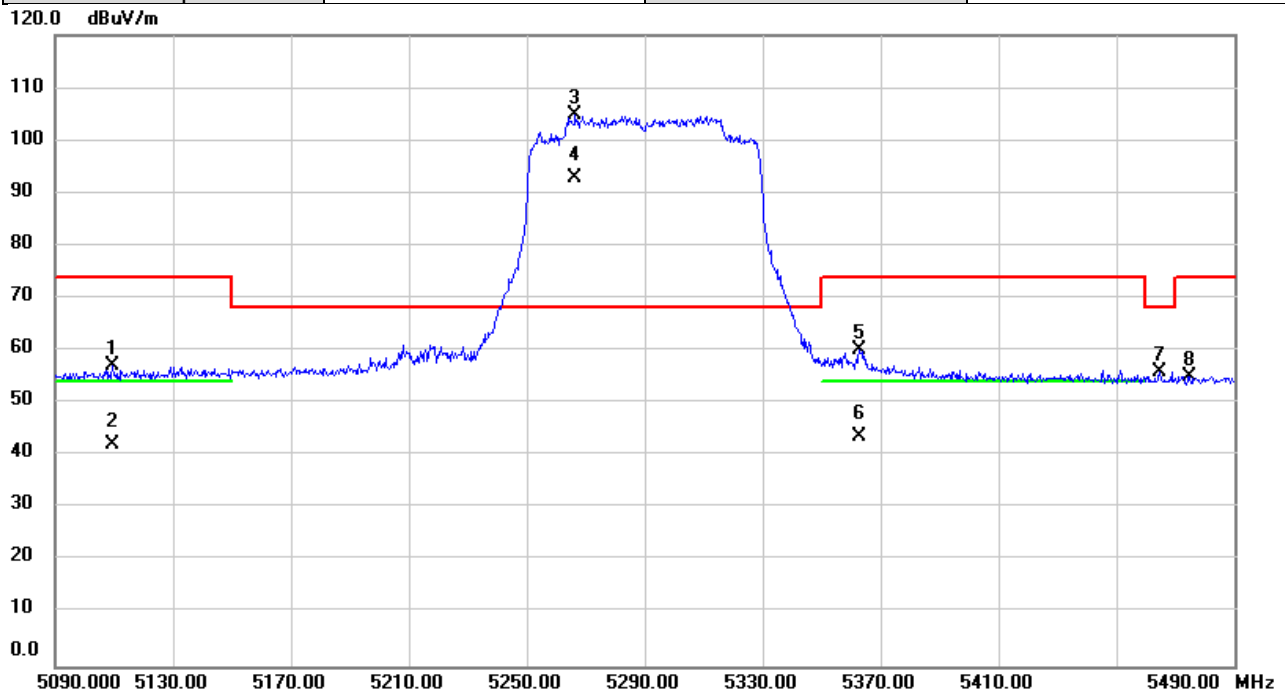


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5109.600	46.63	10.47	57.10	74.00	-16.90	peak	
2		5109.600	31.65	10.47	42.12	54.00	-11.88	AVG	
3	*	5266.400	94.35	10.60	104.95	68.20	36.75	peak	NoLimit
4	X	5266.400	82.34	10.60	92.94	68.20	24.74	AVG	NoLimit
5		5362.800	49.59	10.69	60.28	74.00	-13.72	peak	
6		5362.800	32.92	10.69	43.61	54.00	-10.39	AVG	
7		5464.800	45.24	10.78	56.02	68.20	-12.18	peak	
8		5474.800	44.39	10.80	55.19	74.00	-18.81	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/27
Test Frequency	5530MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

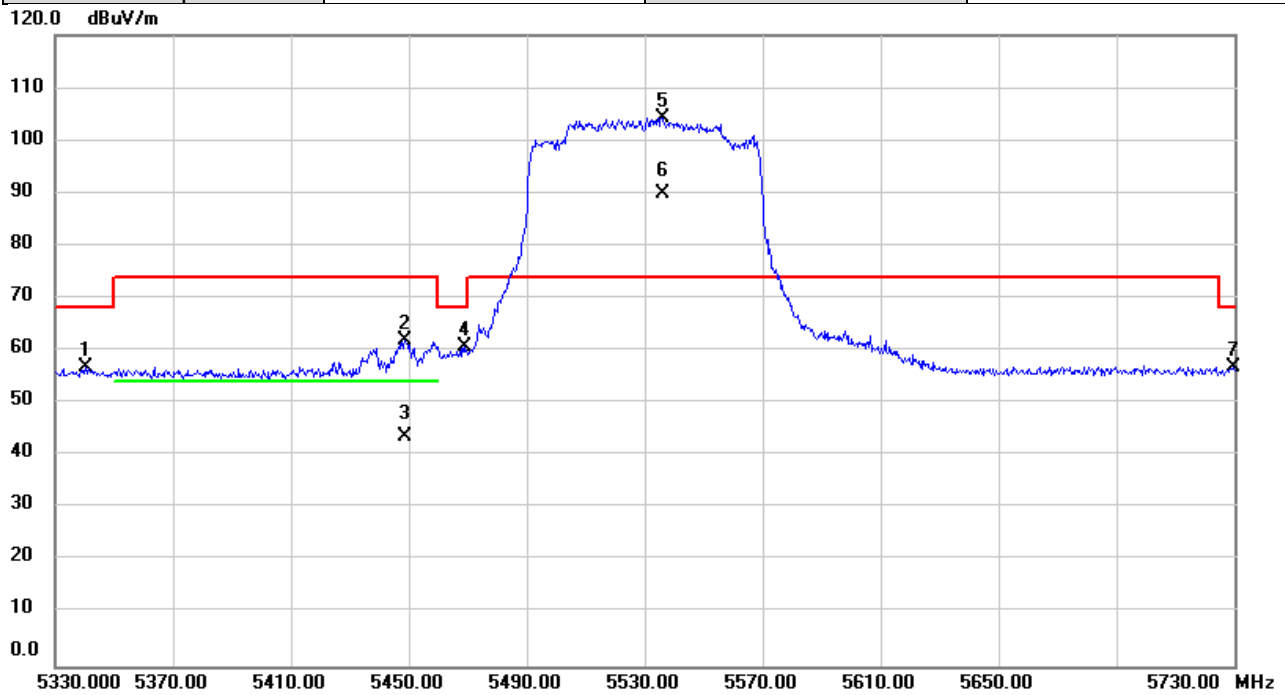


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5340.400	46.07	10.67	56.74	68.20	-11.46	peak	
2		5448.800	51.18	10.77	61.95	74.00	-12.05	peak	
3		5448.800	33.00	10.77	43.77	54.00	-10.23	AVG	
4		5469.200	50.09	10.79	60.88	68.20	-7.32	peak	
5	*	5536.000	93.46	10.88	104.34	74.00	30.34	peak	NoLimit
6	X	5536.000	79.09	10.88	89.97	74.00	15.97	AVG	NoLimit
7		5729.600	45.66	11.19	56.85	68.20	-11.35	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/27
Test Frequency	5610MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

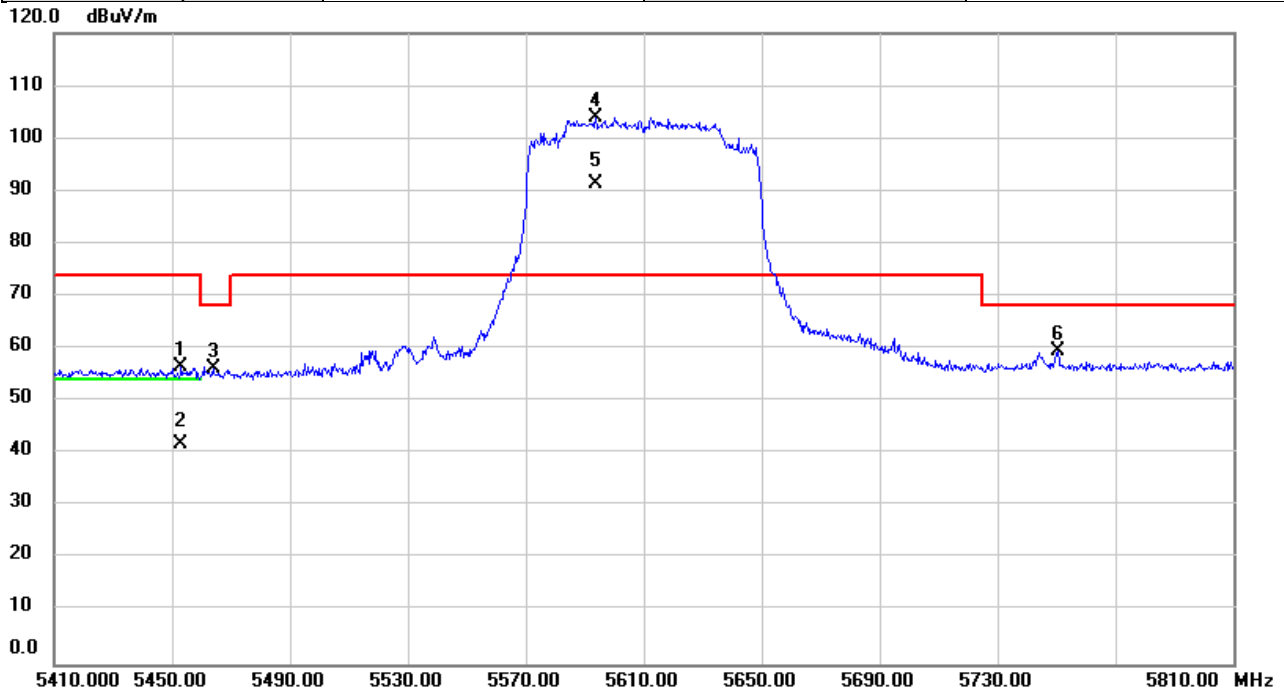


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5453.200	45.70	10.78	56.48	74.00	-17.52	peak	
2		5453.200	31.11	10.78	41.89	74.00	-32.11	QP	
3		5464.000	45.36	10.78	56.14	68.20	-12.06	peak	
4	*	5593.600	93.08	10.97	104.05	74.00	30.05	peak	NoLimit
5	X	5593.600	80.46	10.97	91.43	74.00	17.43	AVG	NoLimit
6		5750.400	48.34	11.23	59.57	68.20	-8.63	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/27
Test Frequency	5690MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

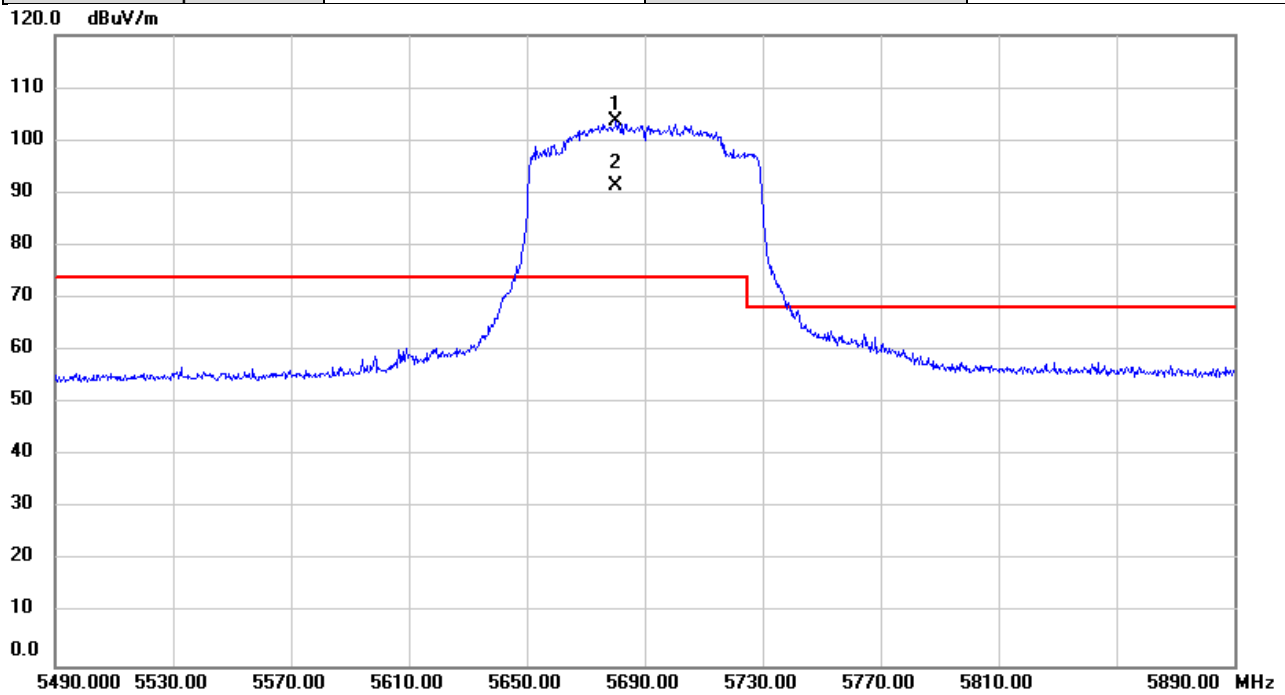


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5680.400	92.67	11.11	103.78	74.00	29.78	peak	NoLimit
2	X	5680.400	80.23	11.11	91.34	74.00	17.34	AVG	NoLimit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/27
Test Frequency	5775MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

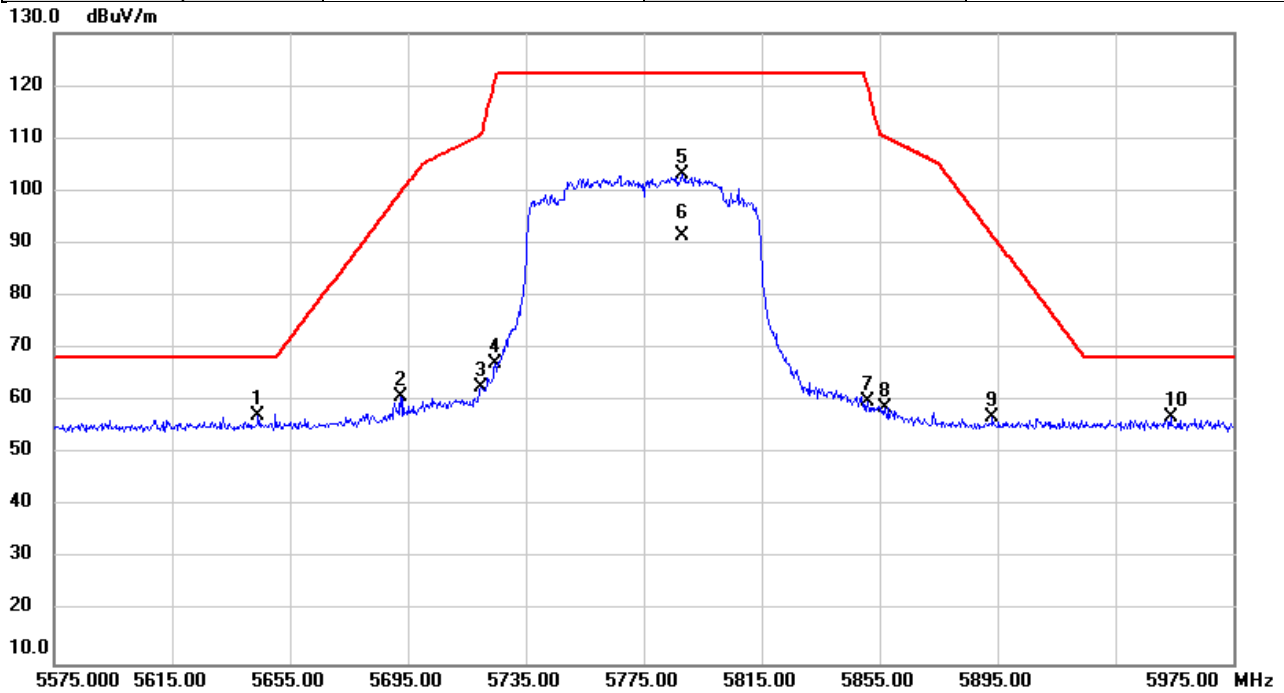


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5644.200	46.16	11.05	57.21	68.20	-10.99	peak	
2		5692.600	49.74	11.13	60.87	99.74	-38.87	peak	
3		5719.800	51.51	11.19	62.70	110.74	-48.04	peak	
4		5724.600	55.84	11.19	67.03	121.29	-54.26	peak	
5		5787.800	91.75	11.29	103.04	122.20	-19.16	peak	NoLimit
6		5787.800	80.24	11.29	91.53	122.20	-30.67	AVG	NoLimit
7		5851.000	48.48	11.39	59.87	119.92	-60.05	peak	
8		5856.600	47.44	11.41	58.85	110.35	-51.50	peak	
9		5893.400	45.59	11.46	57.05	91.55	-34.50	peak	
10		5953.800	45.27	11.57	56.84	68.20	-11.36	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/12/27
Test Frequency	5250MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

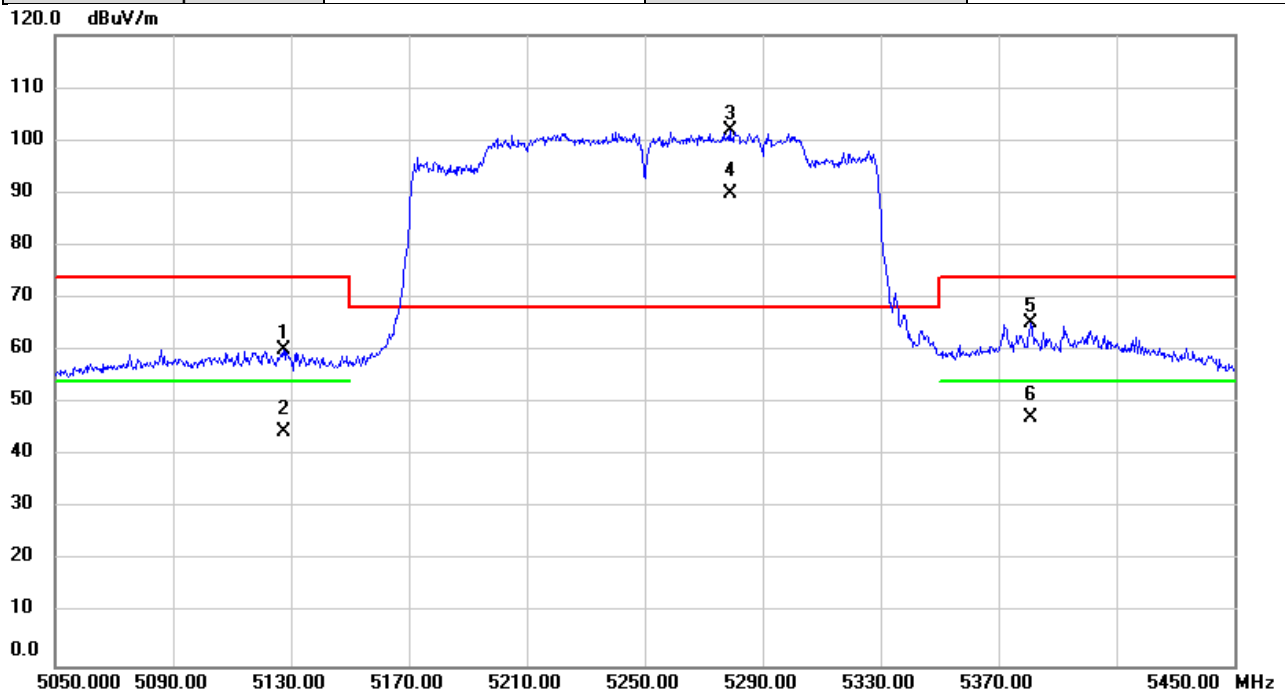


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5127.600	49.63	10.48	60.11	74.00	-13.89	peak	
2		5127.600	33.97	10.48	44.45	54.00	-9.55	AVG	
3	*	5278.800	91.31	10.61	101.92	68.20	33.72	peak	NoLimit
4	X	5278.800	79.19	10.61	89.80	68.20	21.60	AVG	NoLimit
5		5381.200	54.50	10.71	65.21	74.00	-8.79	peak	
6		5381.200	36.65	10.71	47.36	54.00	-6.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/12/27
Test Frequency	5570MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

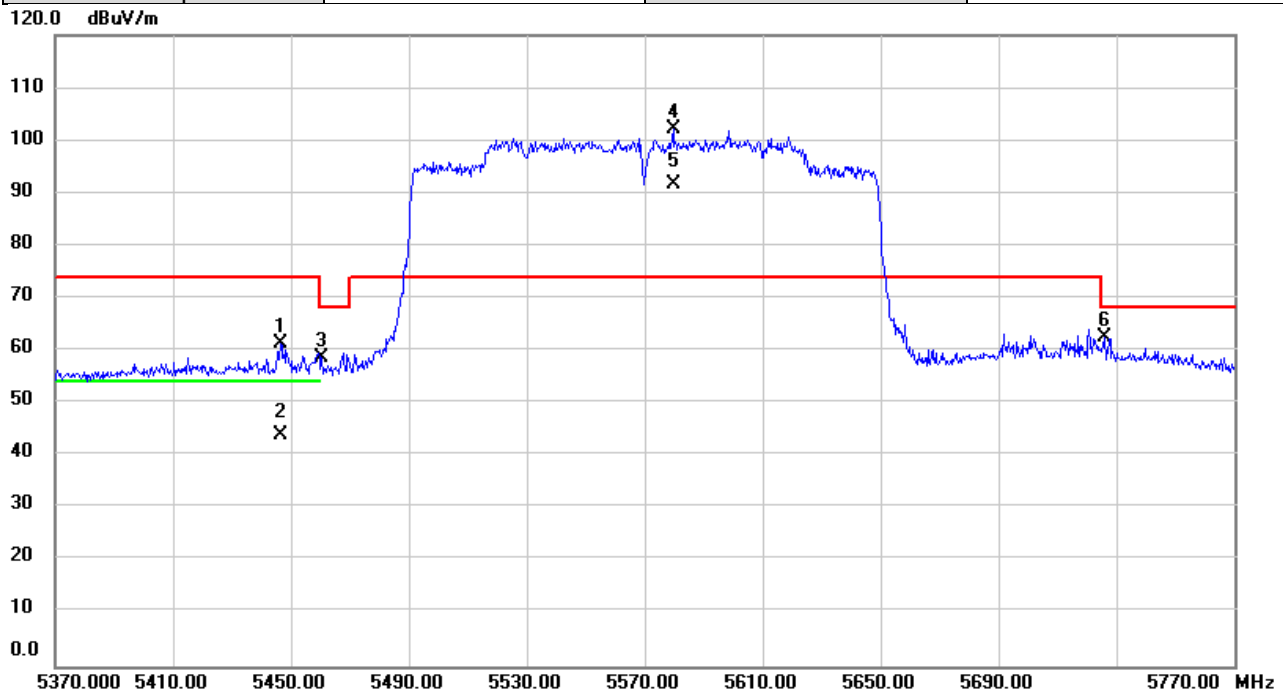


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		5446.400	50.54	10.77	61.31	74.00	-12.69	peak	
2		5446.400	33.17	10.77	43.94	54.00	-10.06	AVG	
3		5460.400	47.95	10.79	58.74	68.20	-9.46	peak	
4	*	5579.600	91.10	10.95	102.05	74.00	28.05	peak	NoLimit
5	X	5579.600	80.65	10.95	91.60	74.00	17.60	AVG	NoLimit
6		5726.000	51.38	11.19	62.57	68.20	-5.63	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/29
Test Frequency	5180MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

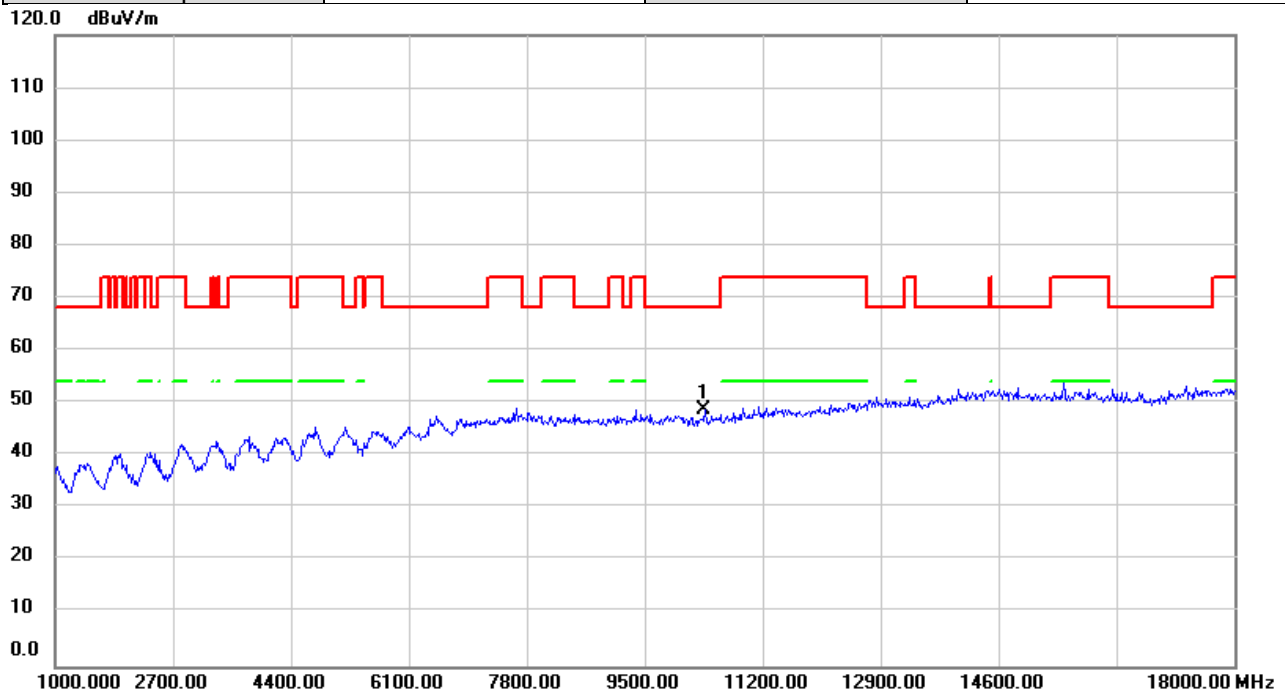


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	46.29	2.57	48.86	68.20	-19.34	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/29
Test Frequency	5180MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

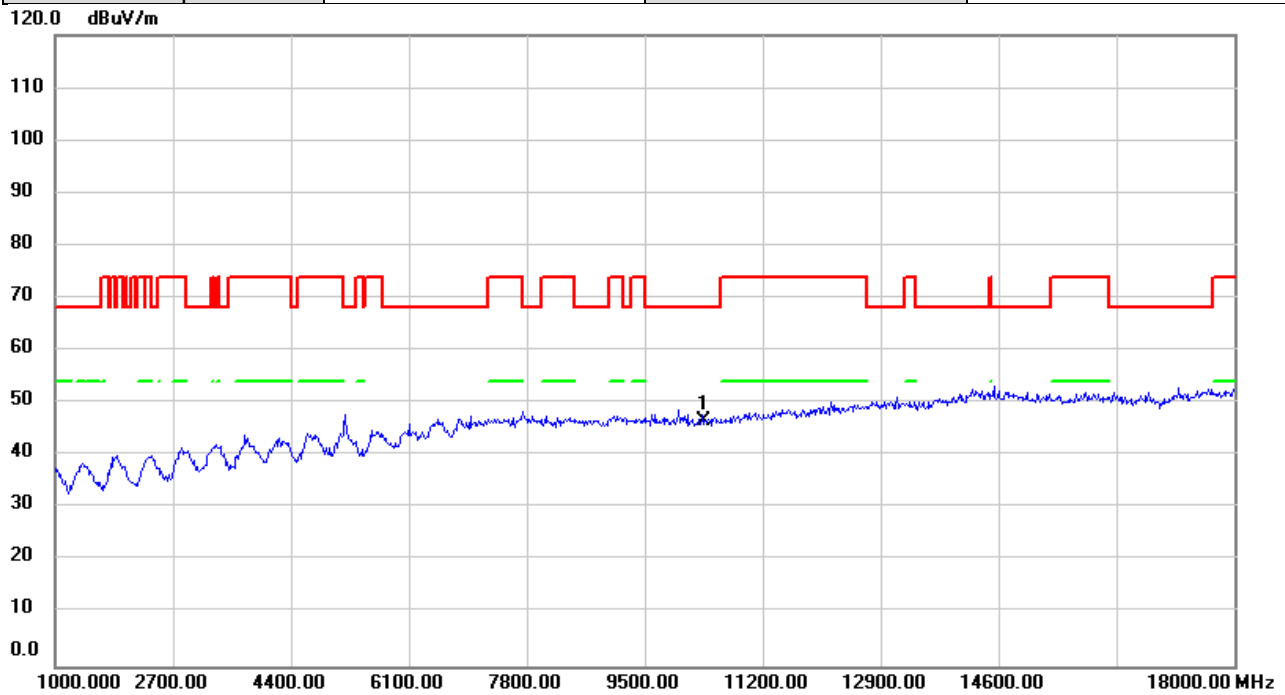


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	44.23	2.57	46.80	68.20	-21.40	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/29
Test Frequency	5200MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

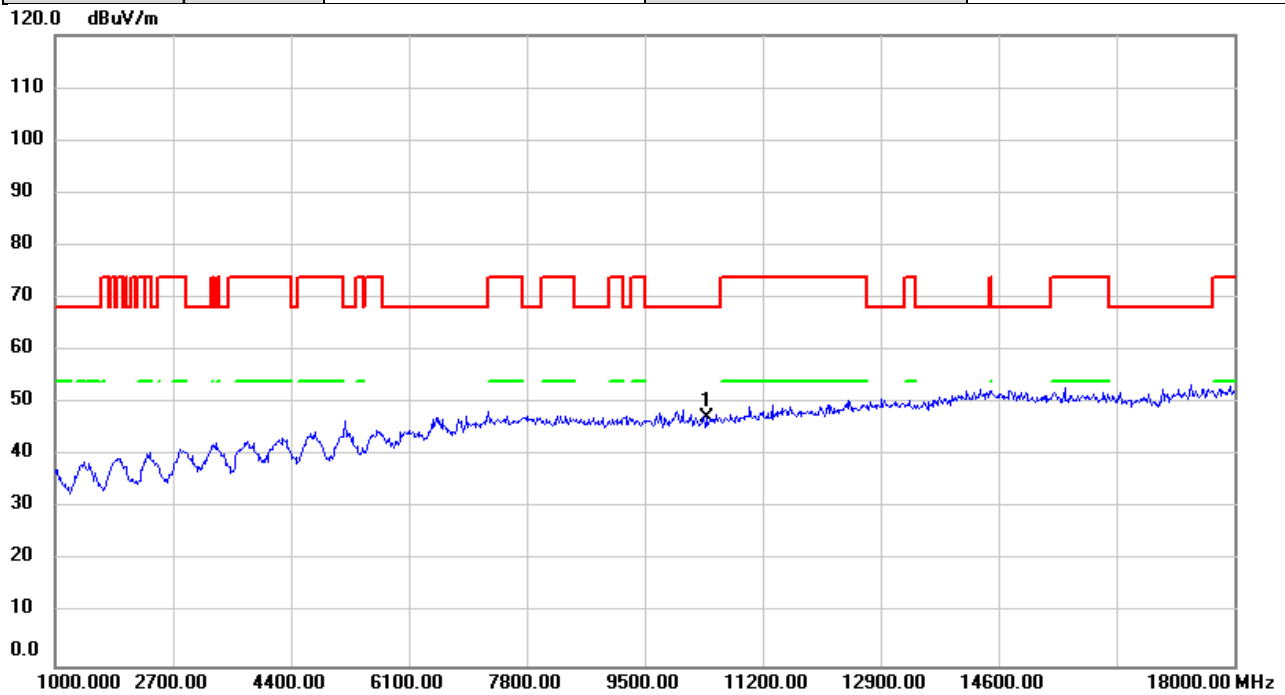


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	44.74	2.54	47.28	68.20	-20.92	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/29
Test Frequency	5200MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

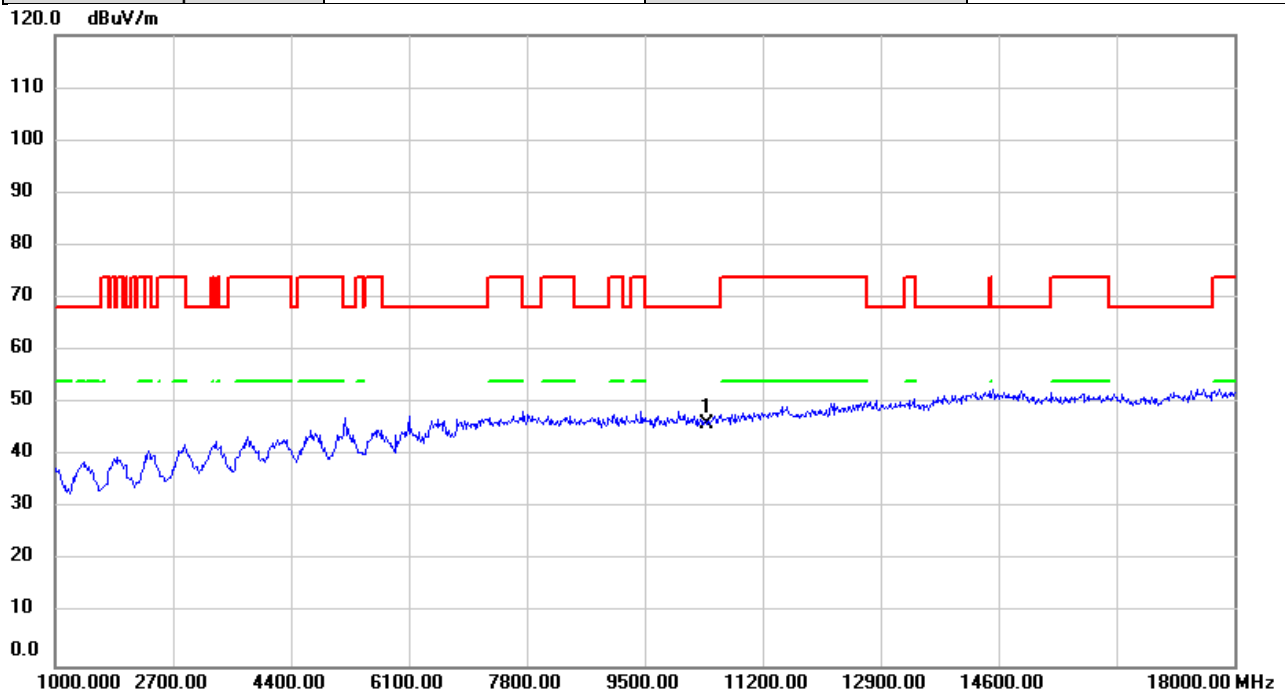


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	43.55	2.54	46.09	68.20	-22.11	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/29
Test Frequency	5240MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

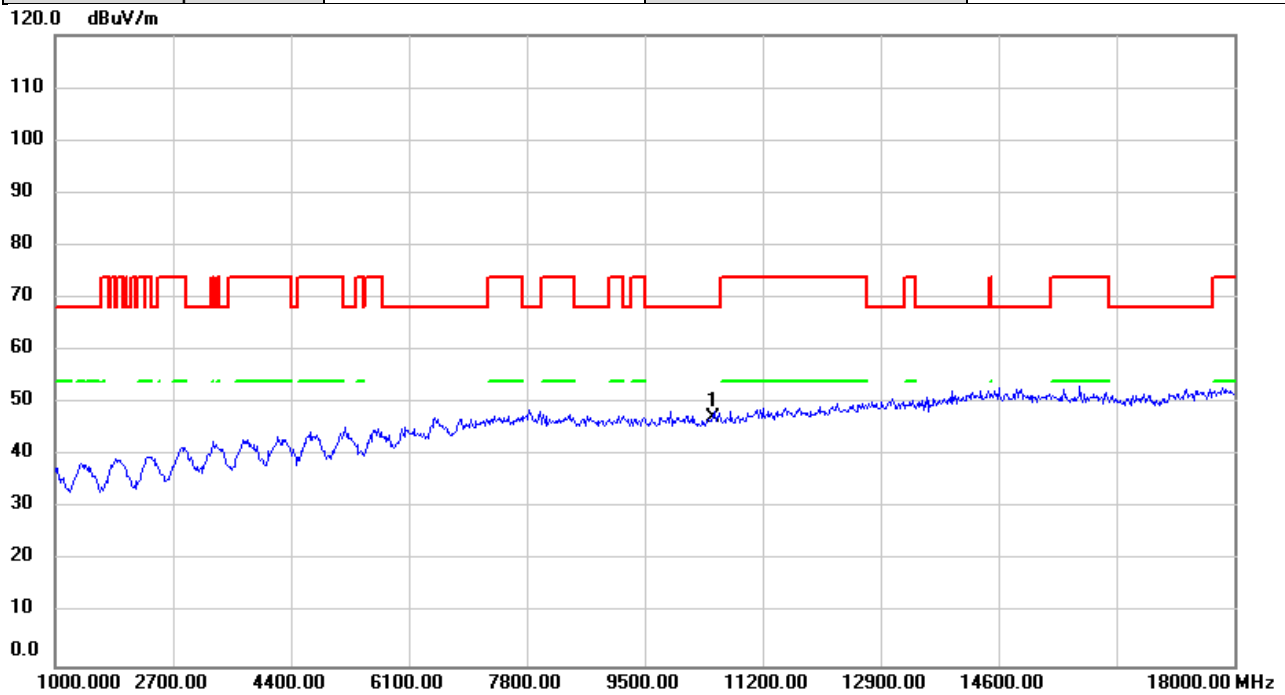


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	44.81	2.48	47.29	68.20	-20.91	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/29
Test Frequency	5240MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

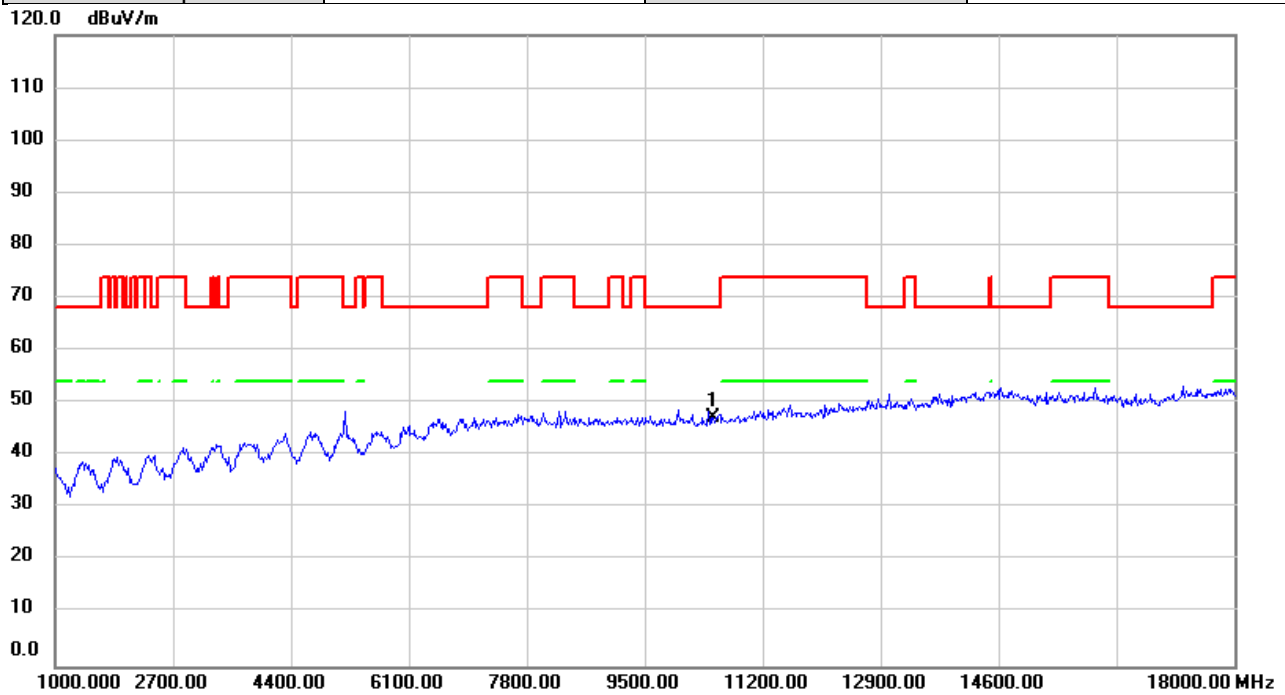


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	44.85	2.48	47.33	68.20	-20.87	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/29
Test Frequency	5260MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

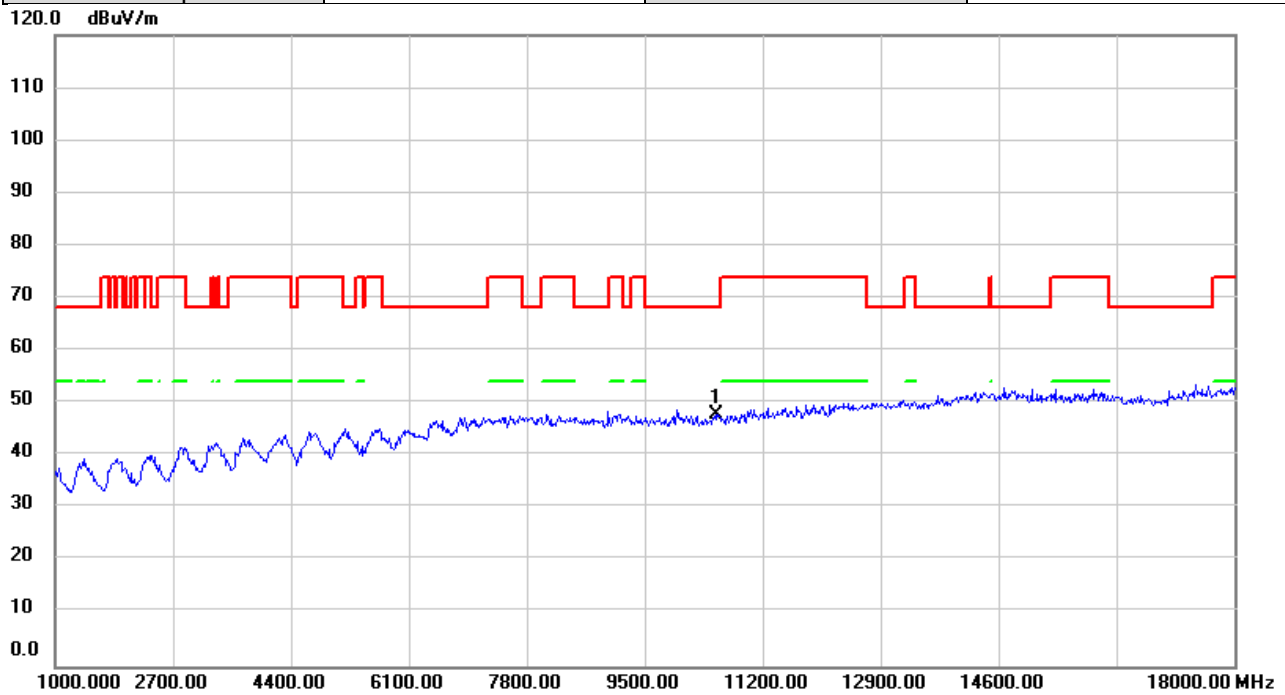


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	45.22	2.48	47.70	68.20	-20.50	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/29
Test Frequency	5260MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

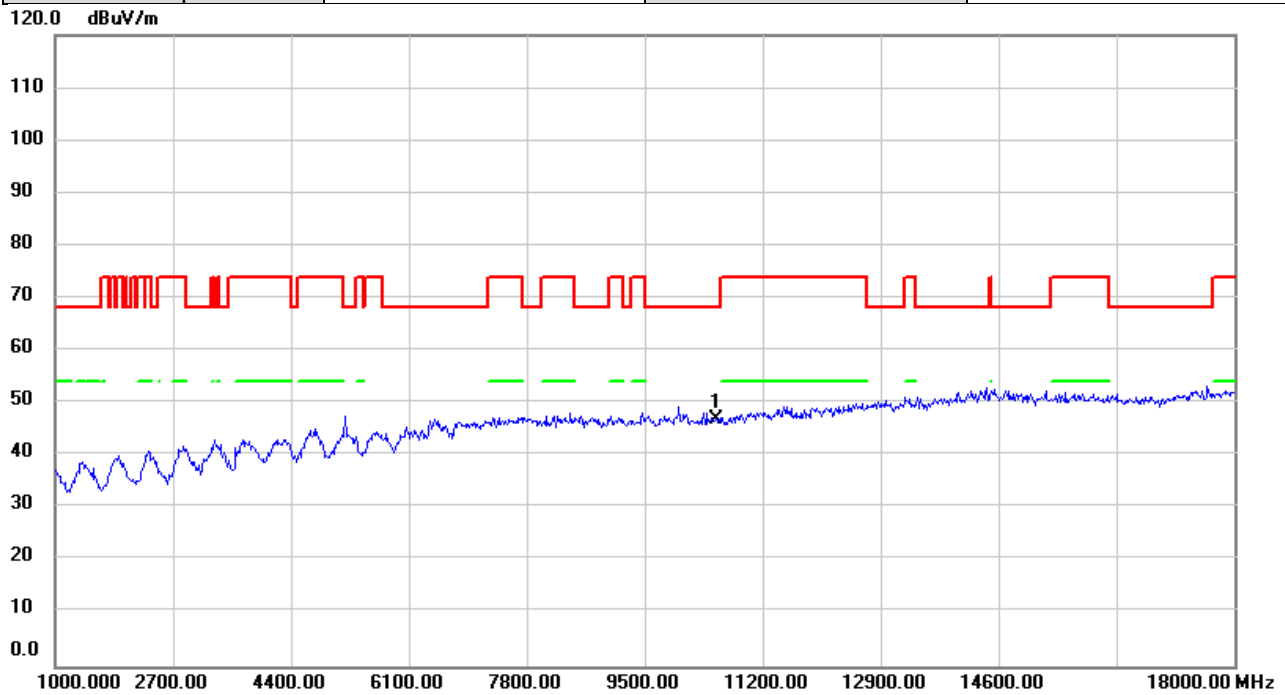


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	44.42	2.48	46.90	68.20	-21.30	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/29
Test Frequency	5280MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

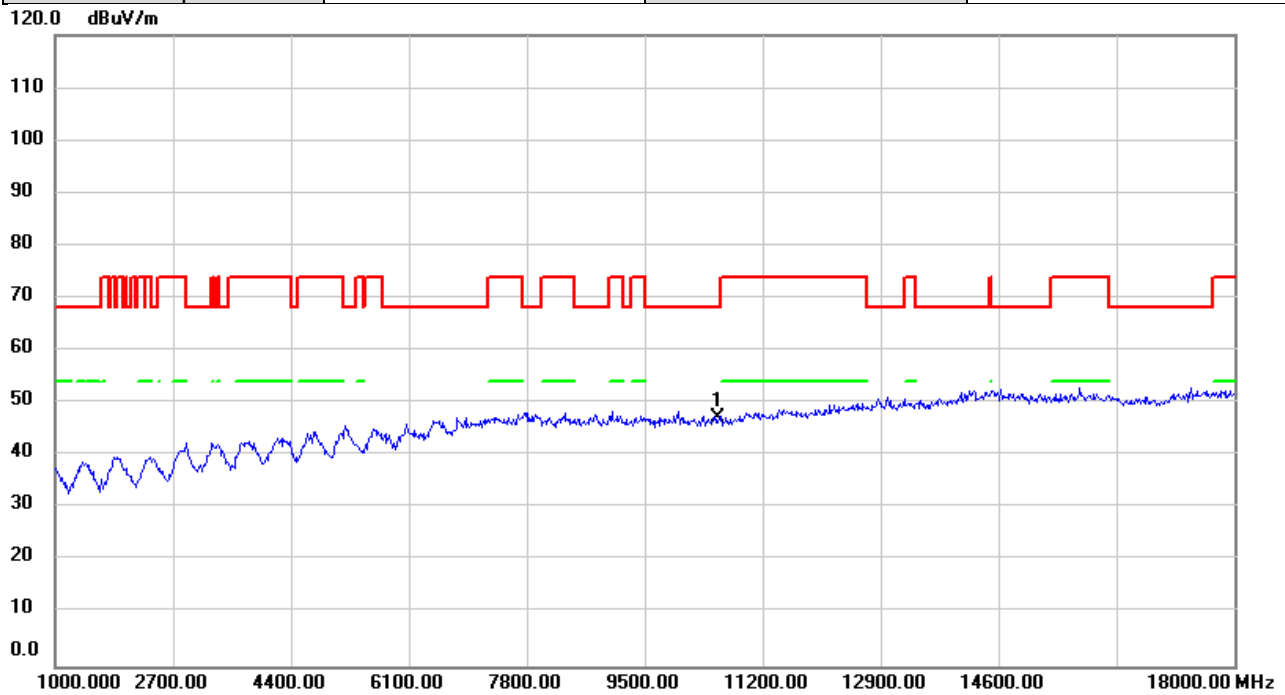


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10560.00	44.74	2.50	47.24	68.20	-20.96	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/29
Test Frequency	5280MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

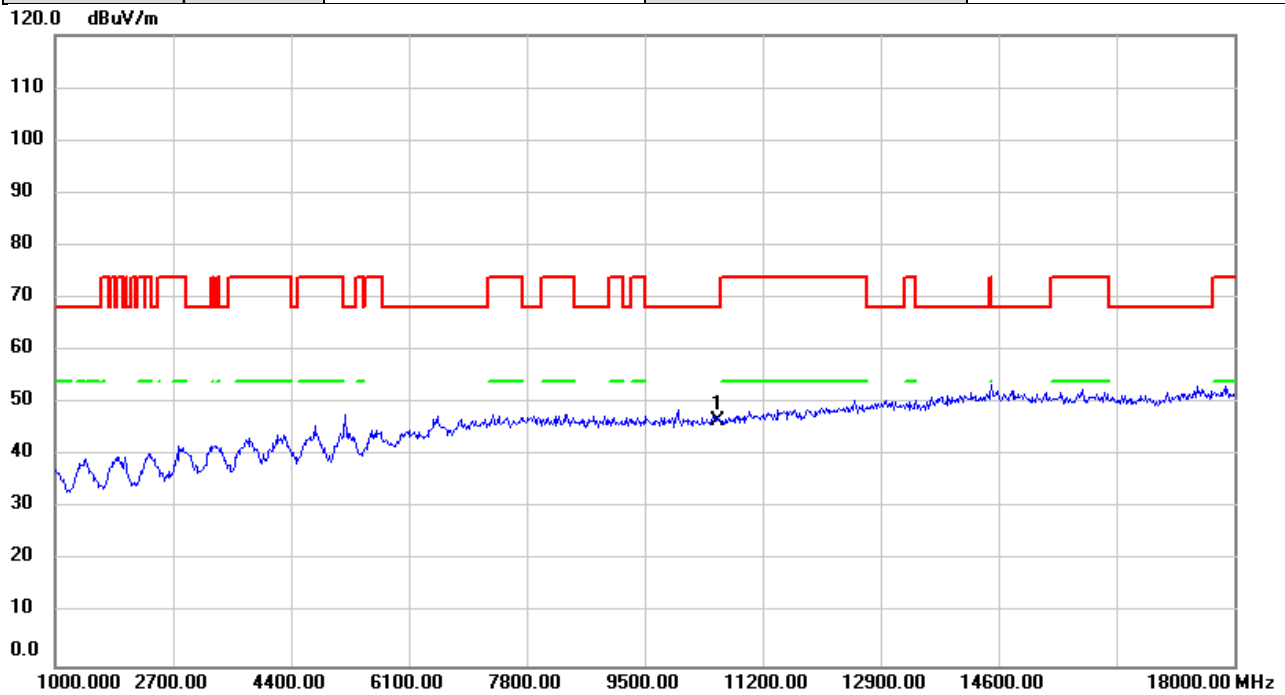


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10560.00	44.01	2.50	46.51	68.20	-21.69	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/29
Test Frequency	5320MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

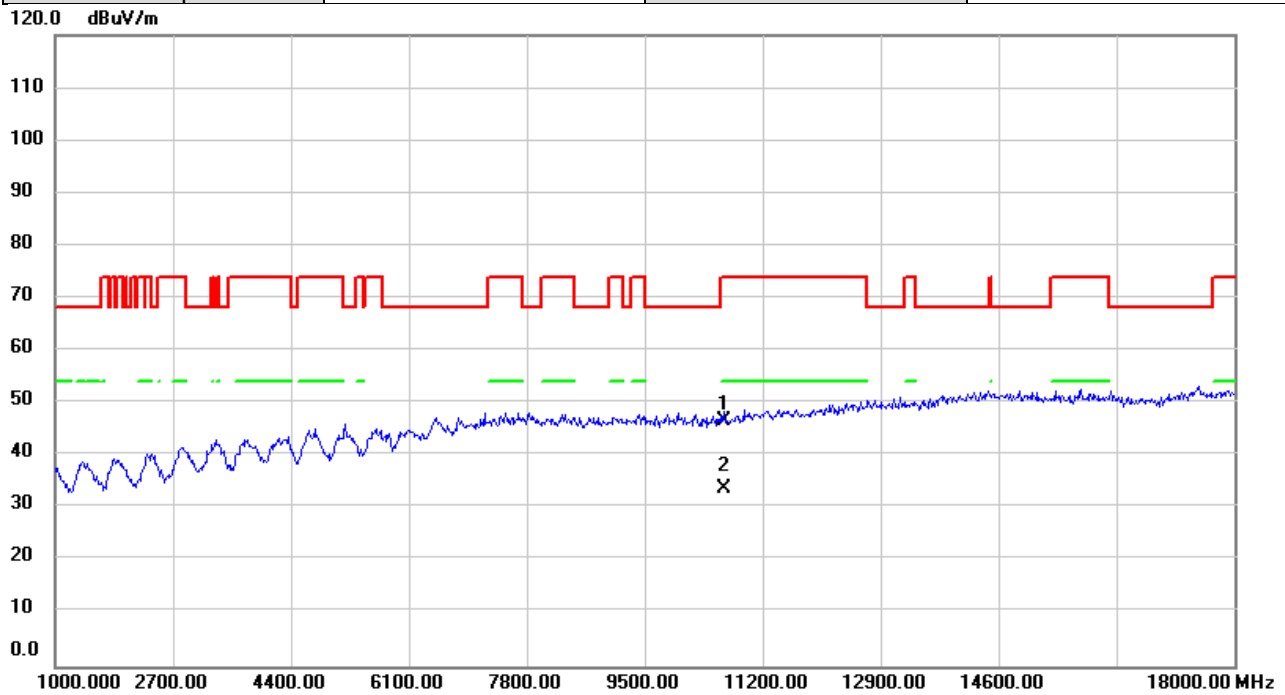


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.00	44.09	2.54	46.63	74.00	-27.37	peak	
2	*	10640.00	31.16	2.54	33.70	54.00	-20.30	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/29
Test Frequency	5320MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

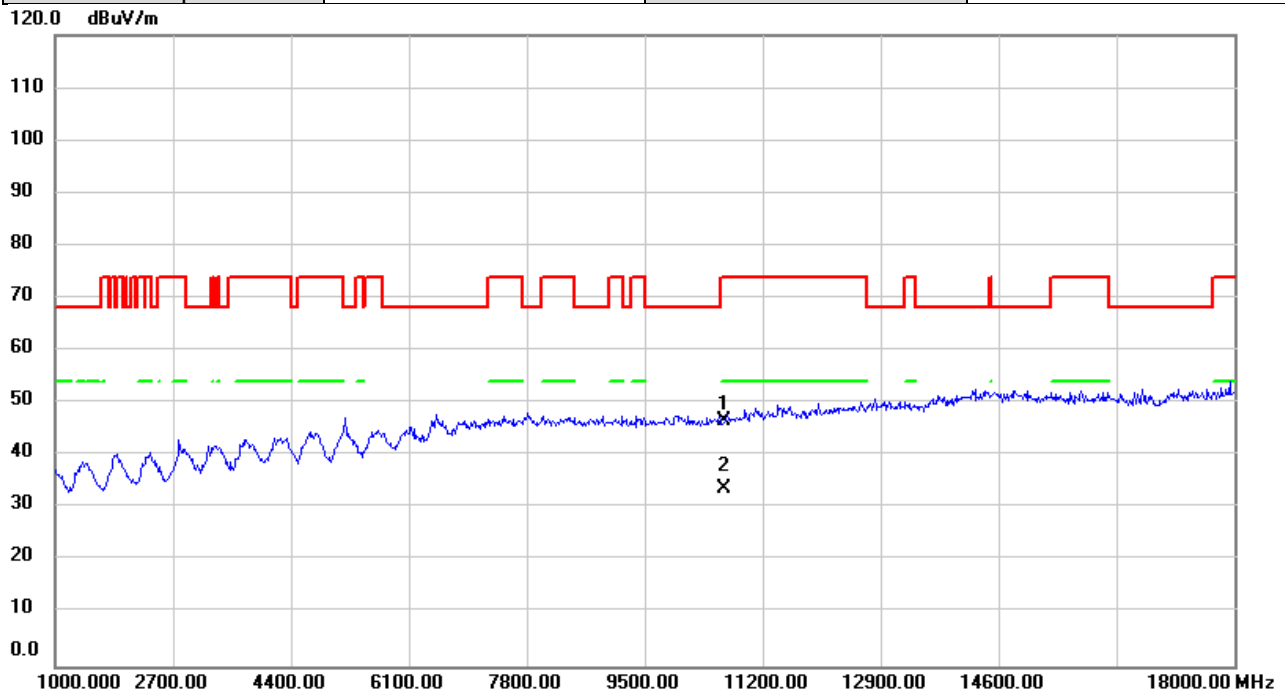


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.00	44.05	2.54	46.59	74.00	-27.41	peak	
2	*	10640.00	31.22	2.54	33.76	54.00	-20.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/29
Test Frequency	5500MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

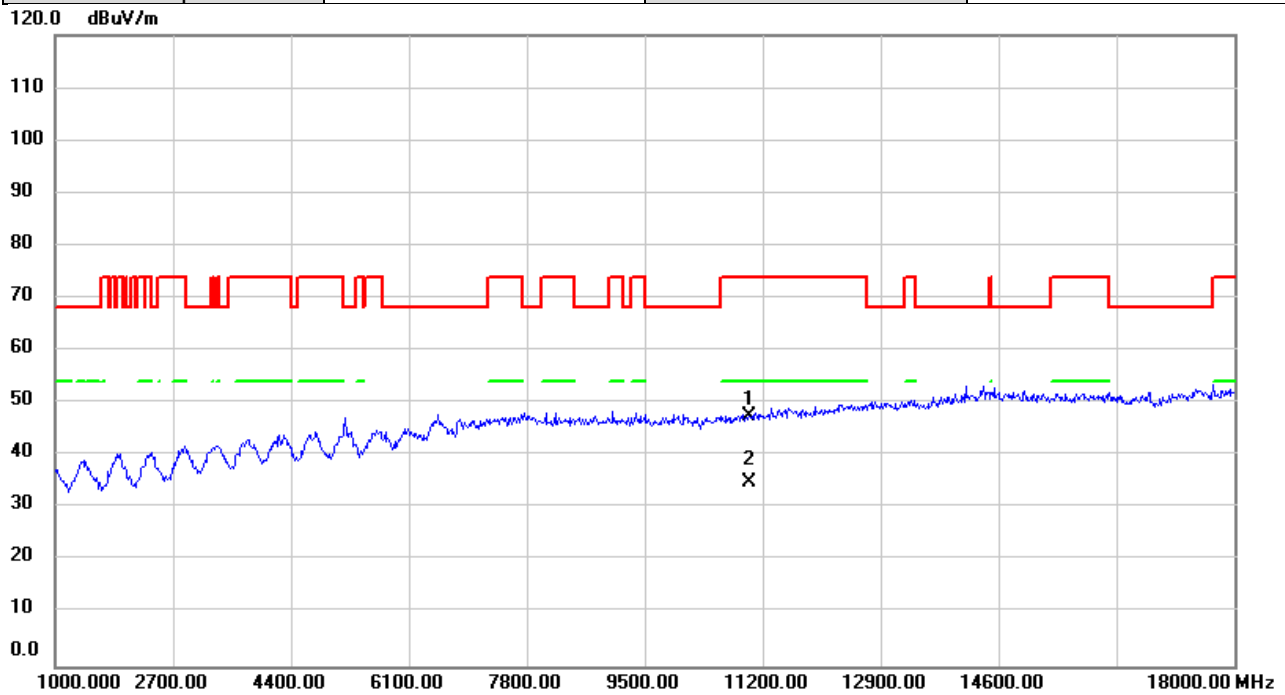


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11000.00	44.77	2.71	47.48	74.00	-26.52	peak	
2	*	11000.00	32.10	2.71	34.81	54.00	-19.19	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/29
Test Frequency	5500MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

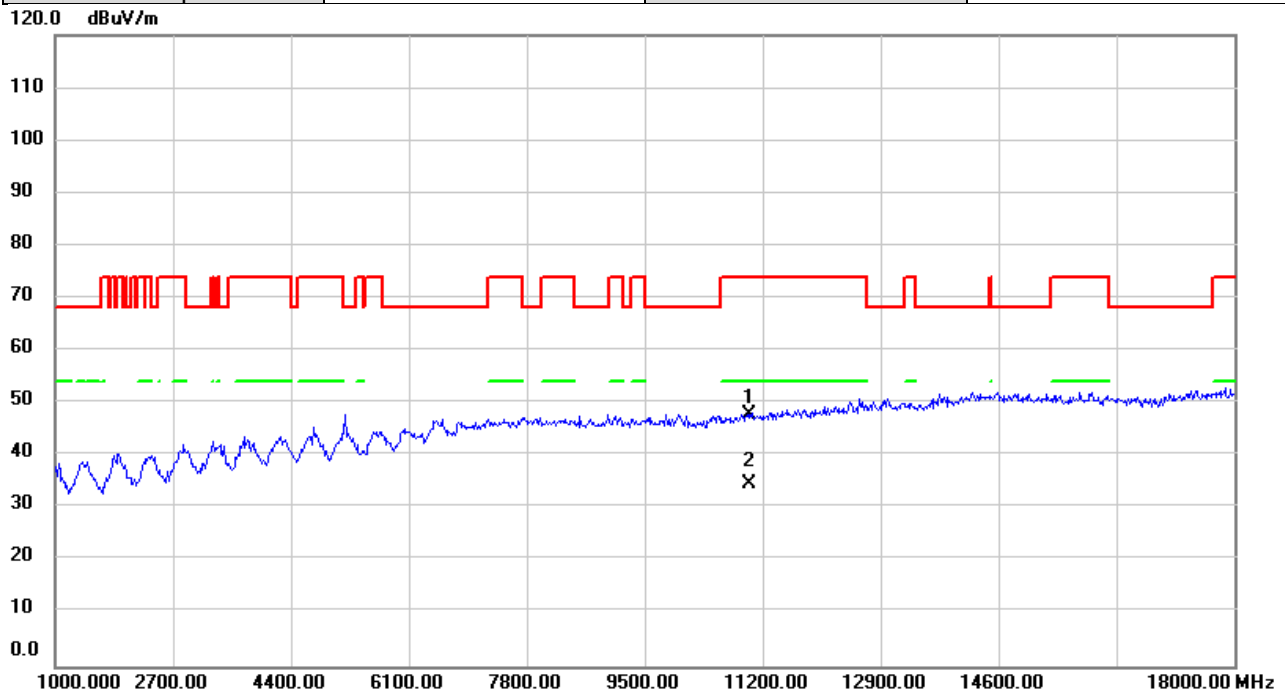


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	45.17	2.71	47.88	74.00	-26.12	peak	
2	*	11000.00	32.09	2.71	34.80	54.00	-19.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/29
Test Frequency	5600MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

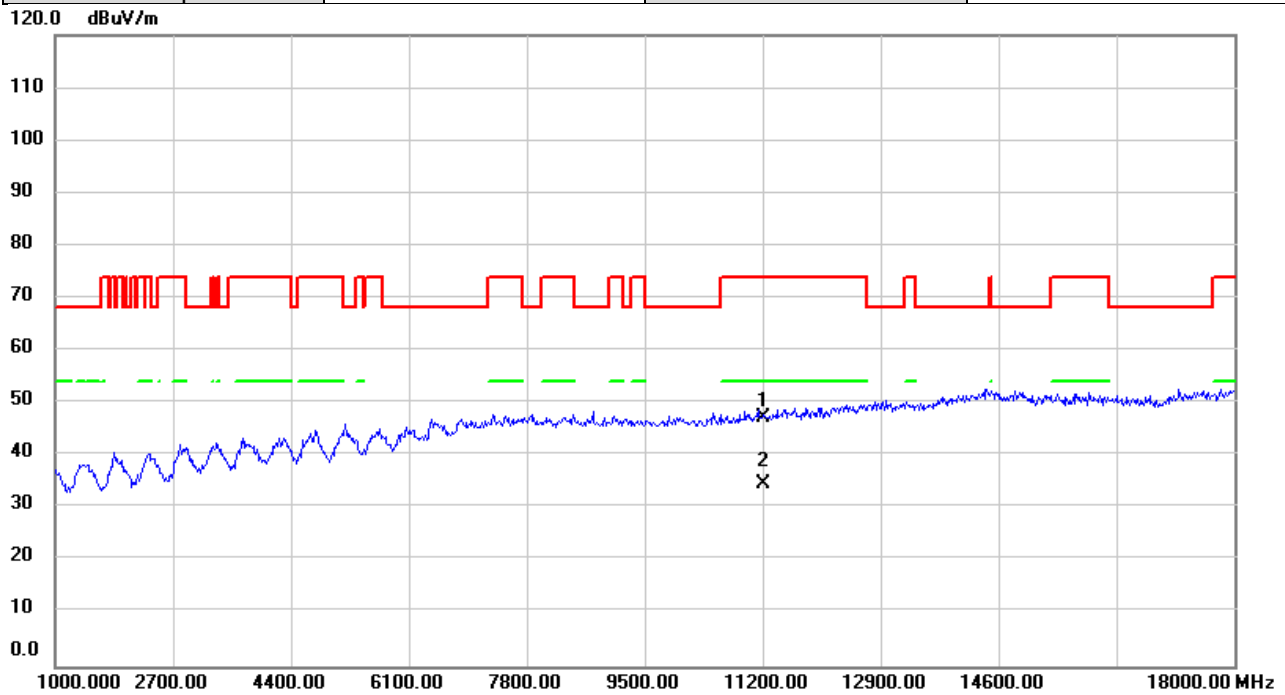


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11200.00	44.63	2.77	47.40	74.00	-26.60	peak	
2	*	11200.00	31.97	2.77	34.74	54.00	-19.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/29
Test Frequency	5600MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

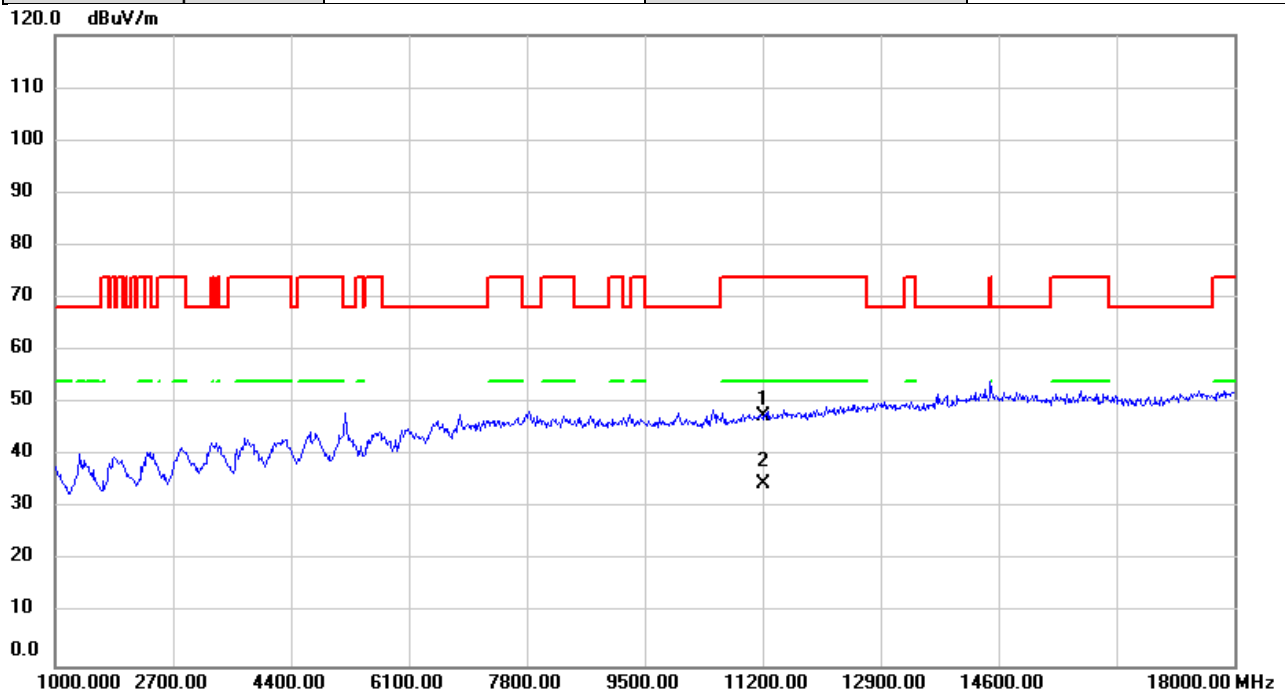


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11200.00	44.90	2.77	47.67	74.00	-26.33	peak	
2	*	11200.00	31.90	2.77	34.67	54.00	-19.33	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/29
Test Frequency	5700MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

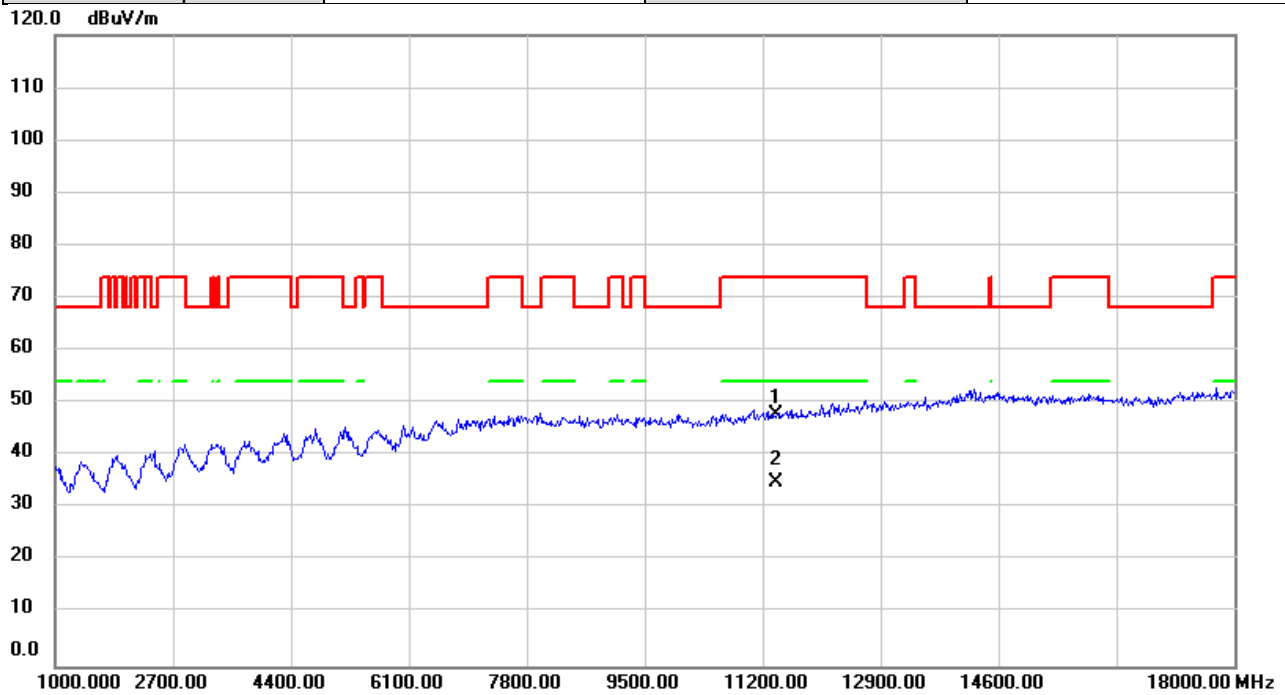


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.00	44.94	2.83	47.77	74.00	-26.23	peak	
2	*	11400.00	32.19	2.83	35.02	54.00	-18.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/29
Test Frequency	5700MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

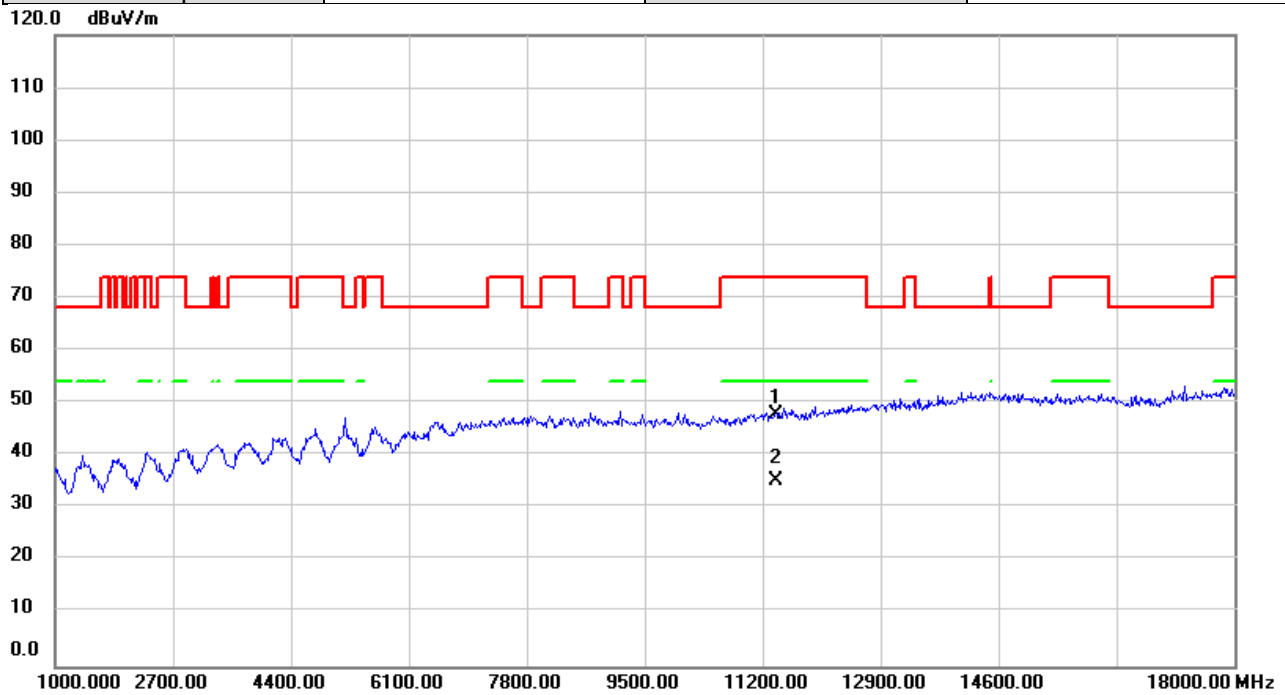


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.00	44.88	2.83	47.71	74.00	-26.29	peak	
2	*	11400.00	32.28	2.83	35.11	54.00	-18.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/29
Test Frequency	5745MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

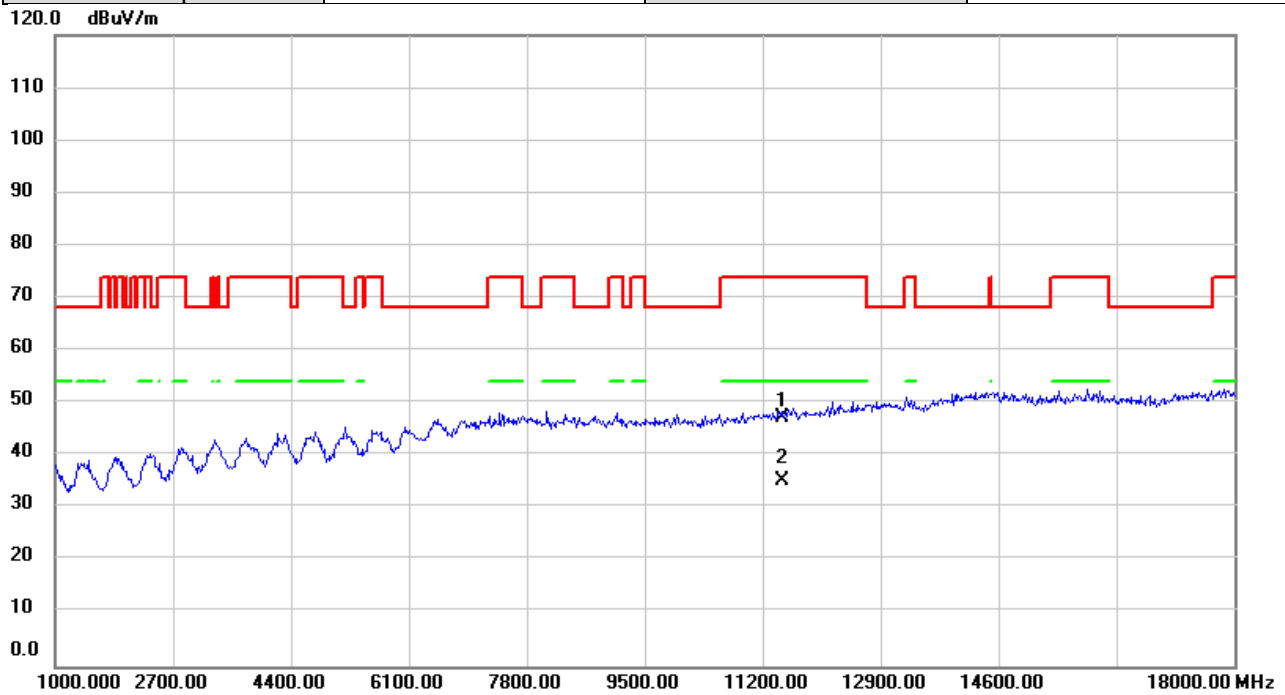


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	44.52	2.86	47.38	74.00	-26.62	peak	
2	*	11490.00	32.30	2.86	35.16	54.00	-18.84	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/29
Test Frequency	5745MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

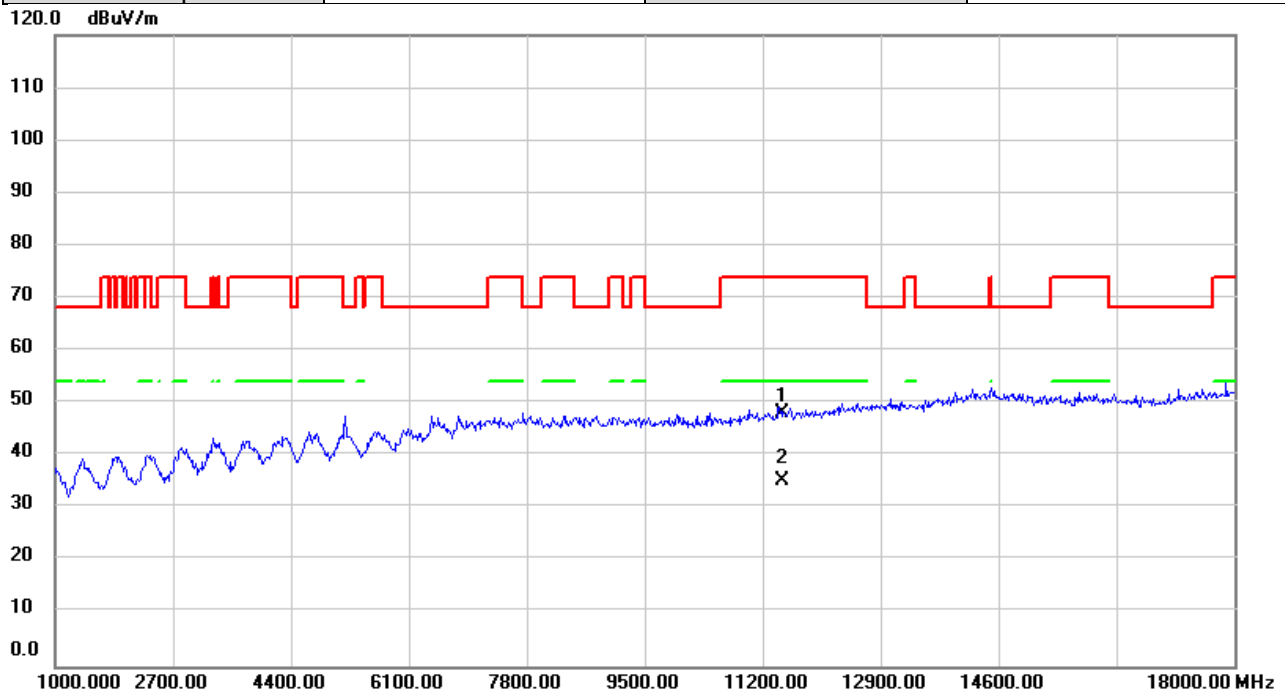


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	45.29	2.86	48.15	74.00	-25.85	peak	
2	*	11490.00	32.34	2.86	35.20	54.00	-18.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/29
Test Frequency	5785MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

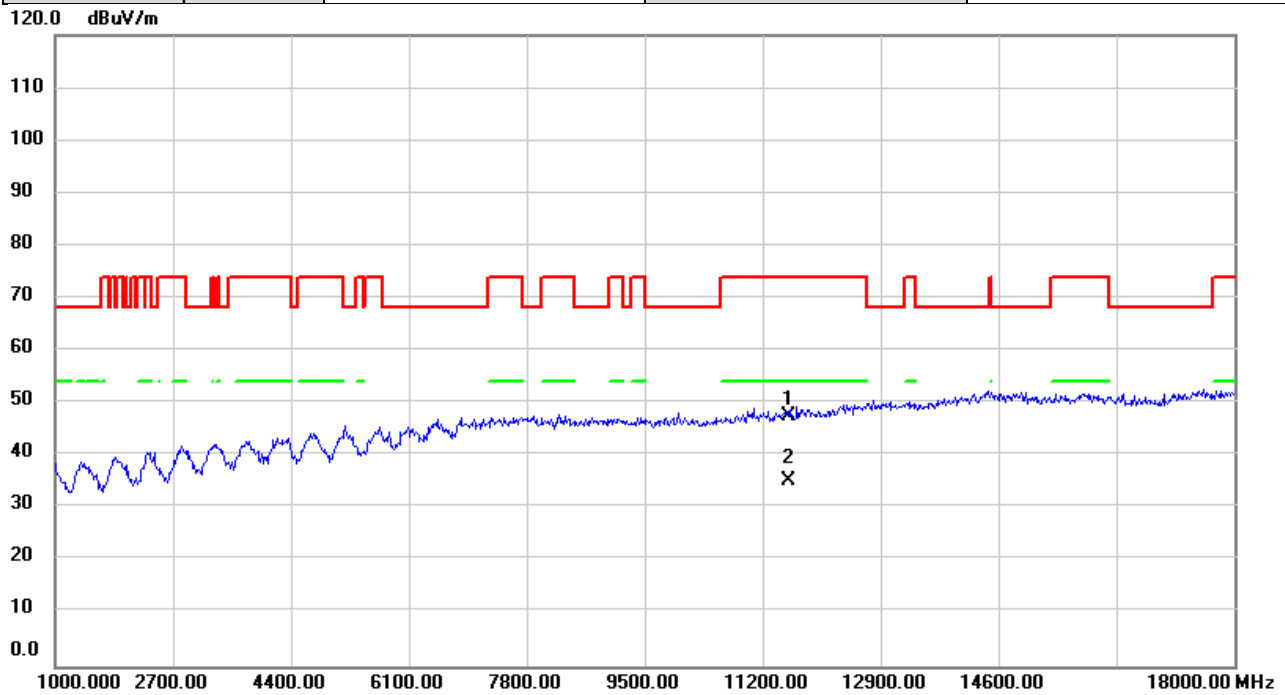


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	44.69	2.81	47.50	74.00	-26.50	peak	
2	*	11570.00	32.47	2.81	35.28	54.00	-18.72	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/29
Test Frequency	5785MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

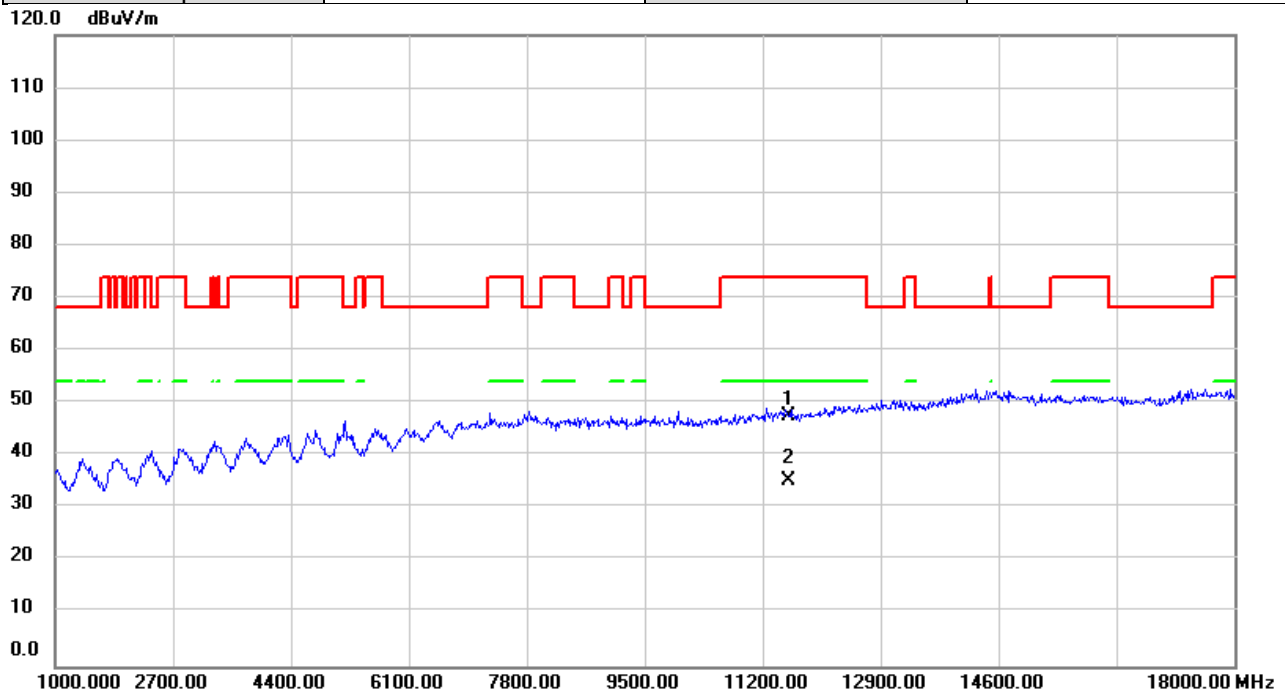


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11570.00	44.76	2.81	47.57	74.00	-26.43	peak	
2	*	11570.00	32.49	2.81	35.30	54.00	-18.70	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/29
Test Frequency	5825MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

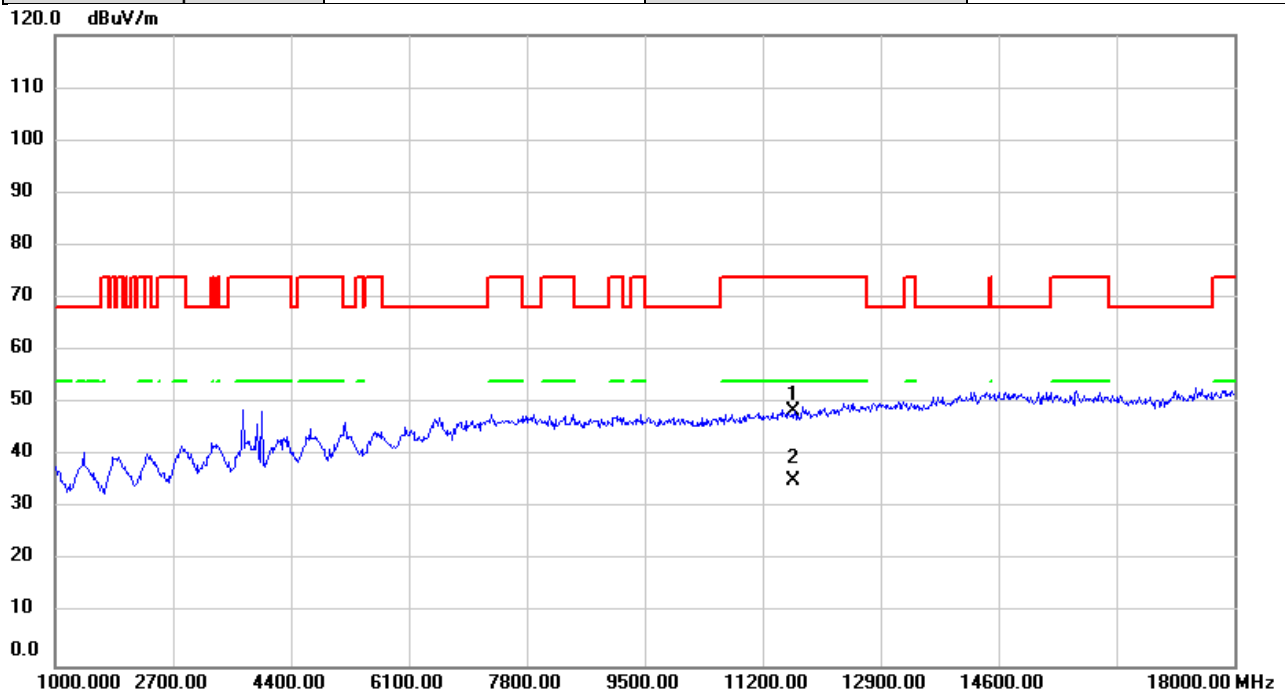


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11650.00	45.59	2.73	48.32	74.00	-25.68	peak	
2	*	11650.00	32.41	2.73	35.14	54.00	-18.86	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/29
Test Frequency	5825MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

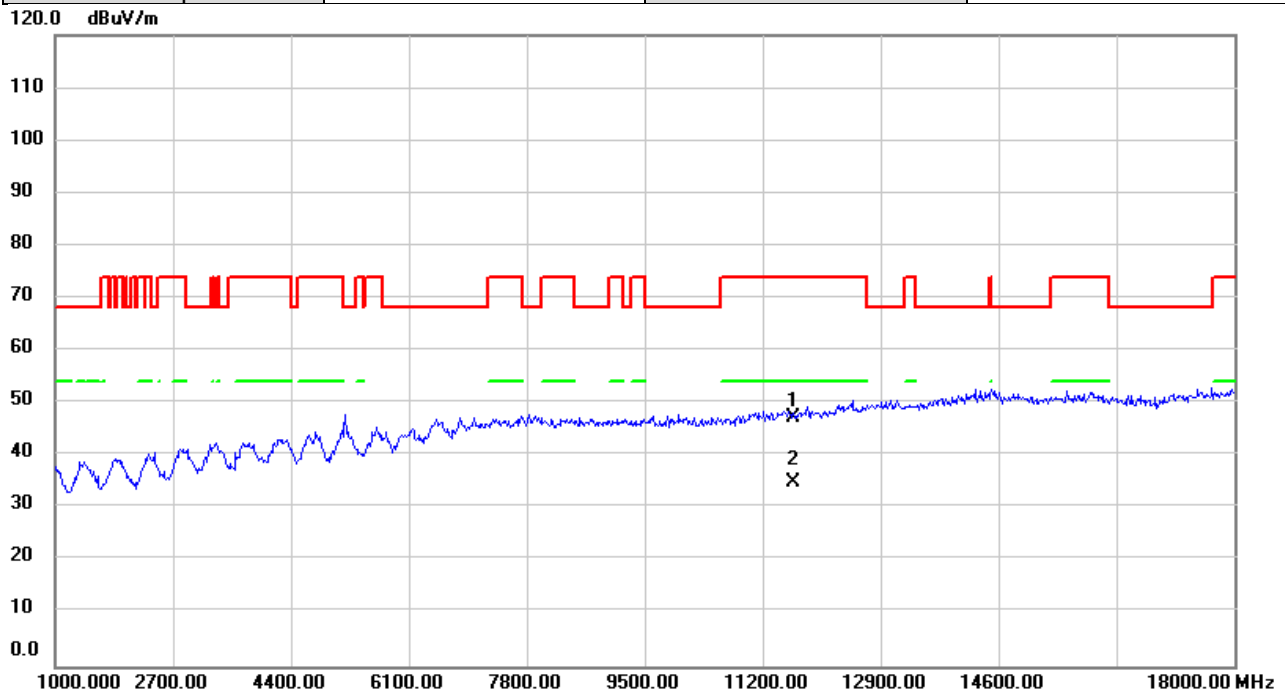


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	44.52	2.73	47.25	74.00	-26.75	peak	
2	*	11650.00	32.28	2.73	35.01	54.00	-18.99	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/29
Test Frequency	5180MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

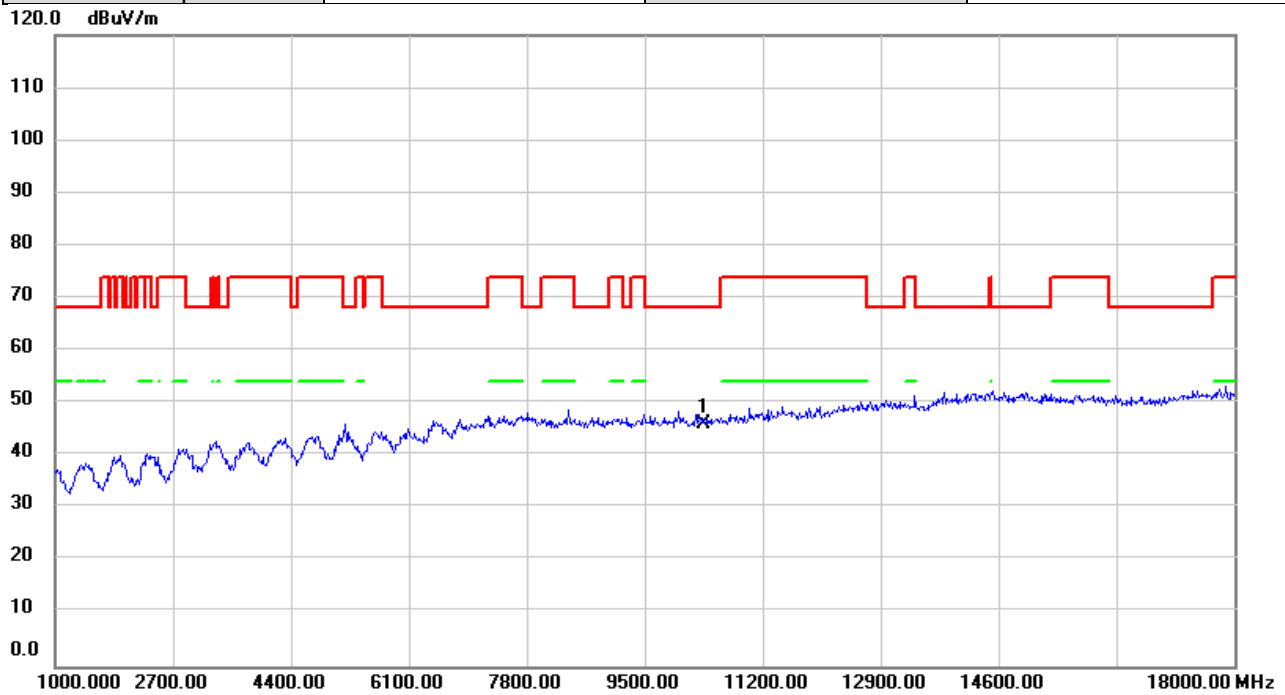


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	43.46	2.57	46.03	68.20	-22.17	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/29
Test Frequency	5180MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

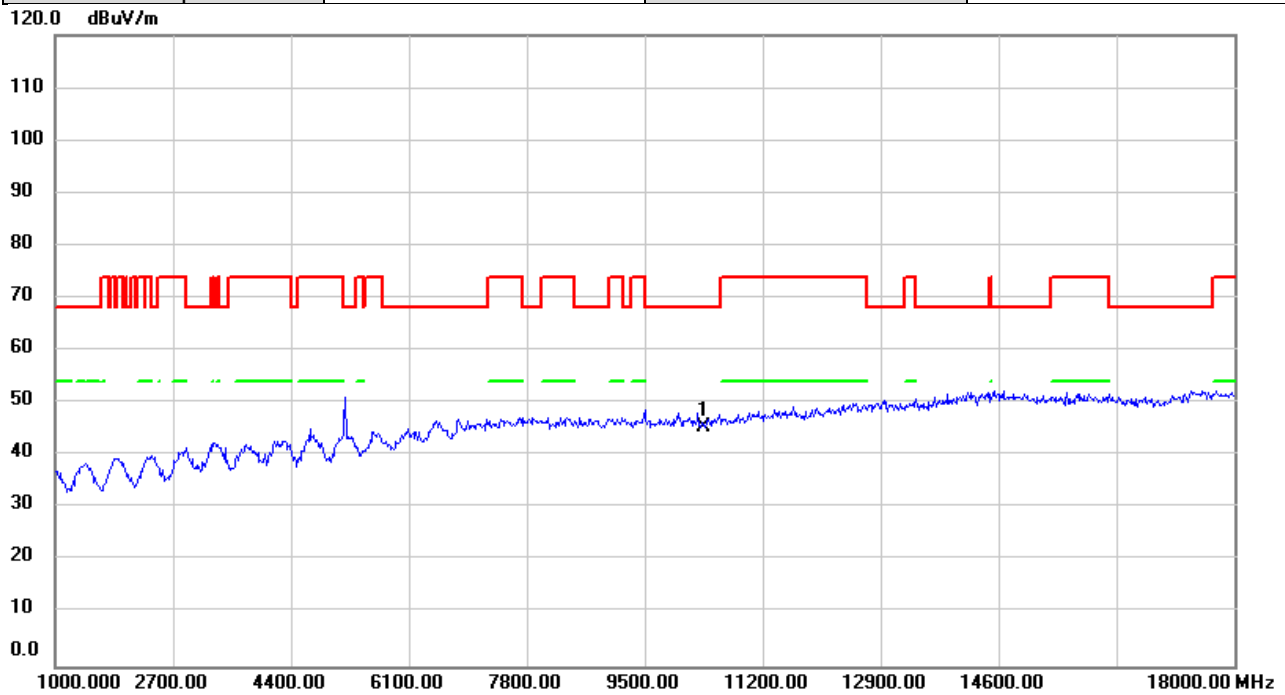


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	42.88	2.57	45.45	68.20	-22.75	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/29
Test Frequency	5200MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

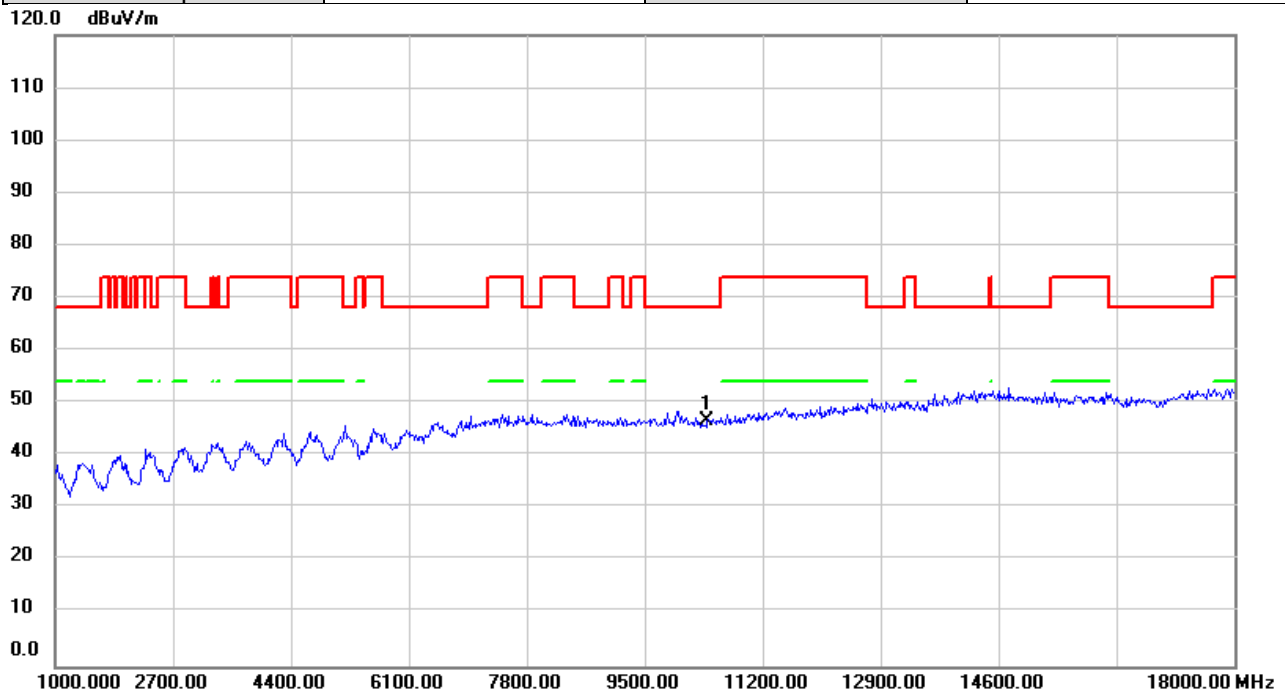


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	43.98	2.54	46.52	68.20	-21.68	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/29
Test Frequency	5200MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

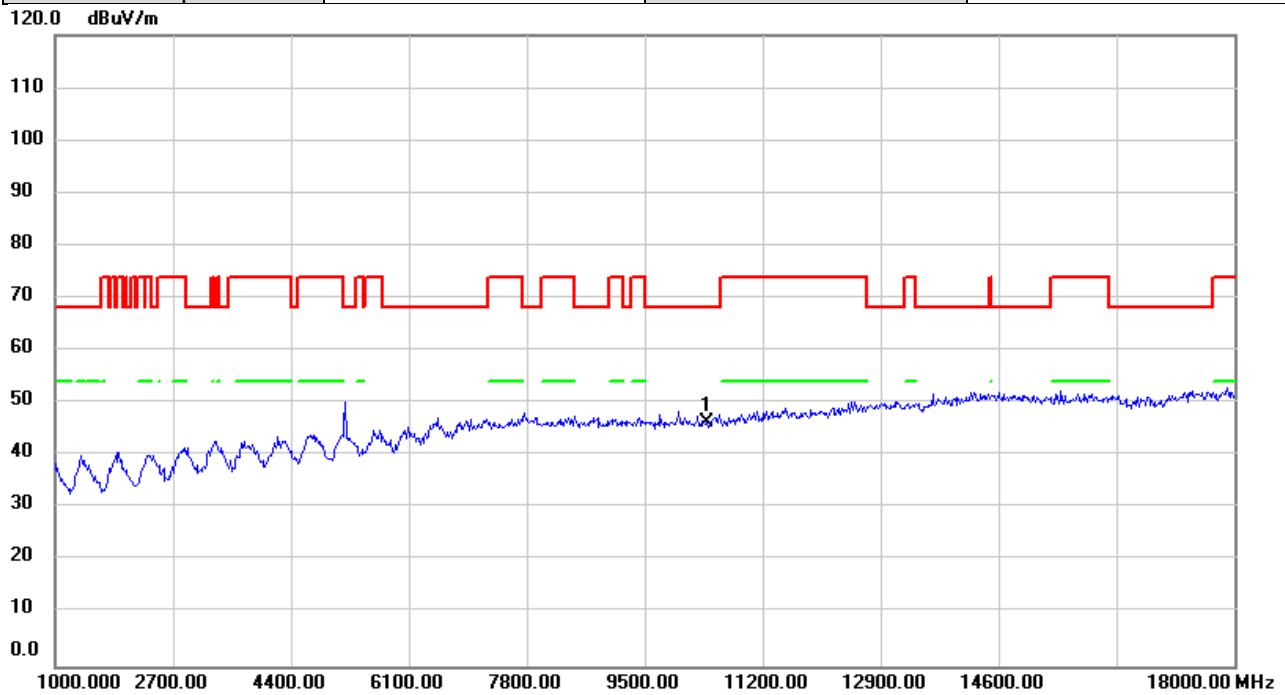


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	43.73	2.54	46.27	68.20	-21.93	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/29
Test Frequency	5240MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

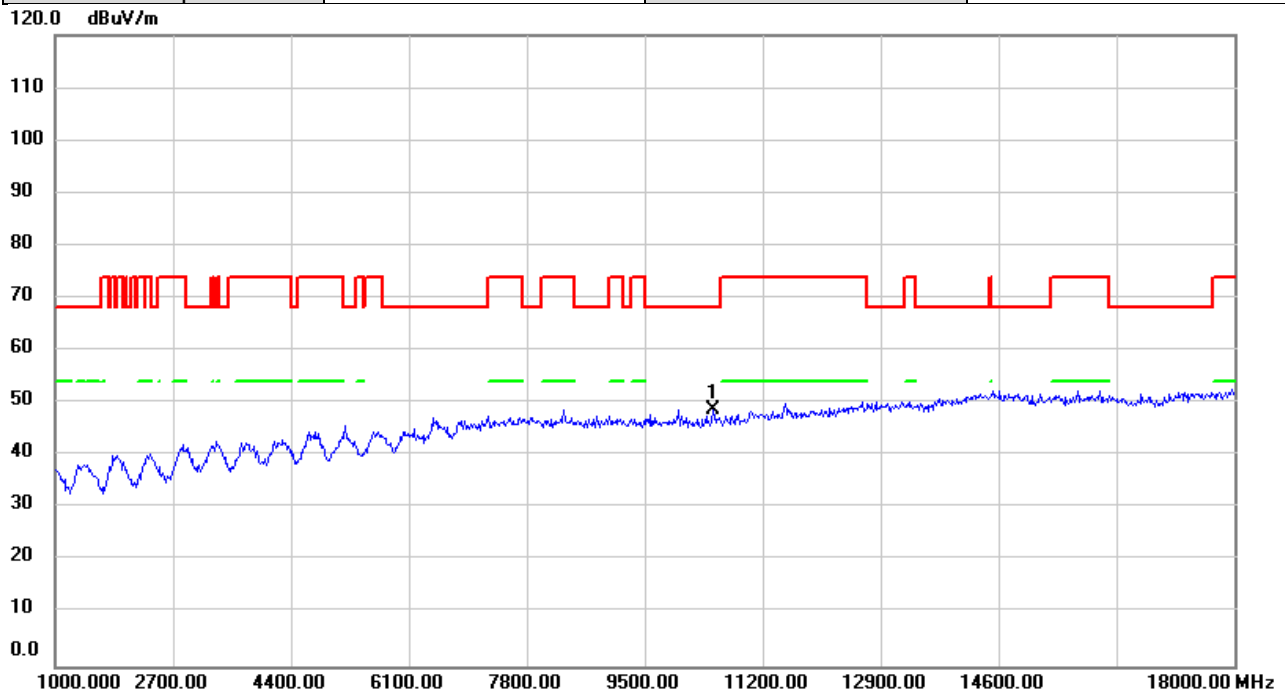


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	46.22	2.48	48.70	68.20	-19.50	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/29
Test Frequency	5240MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

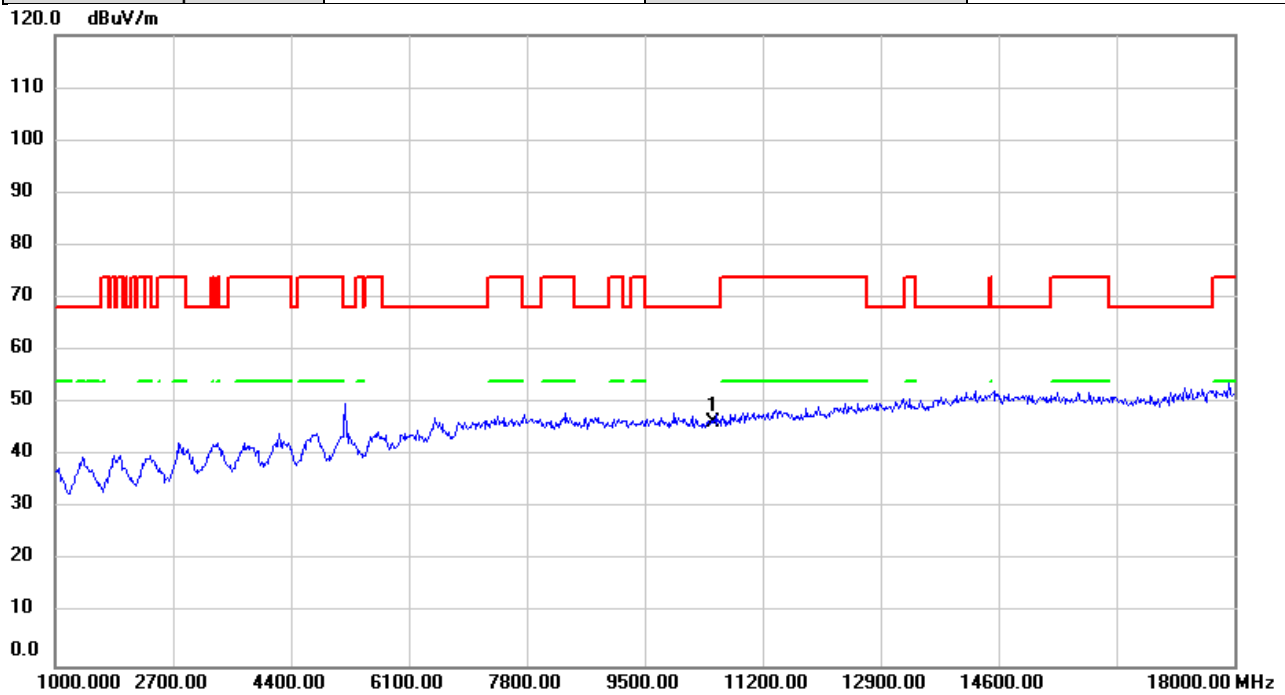


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	44.00	2.48	46.48	68.20	-21.72	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/29
Test Frequency	5260MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

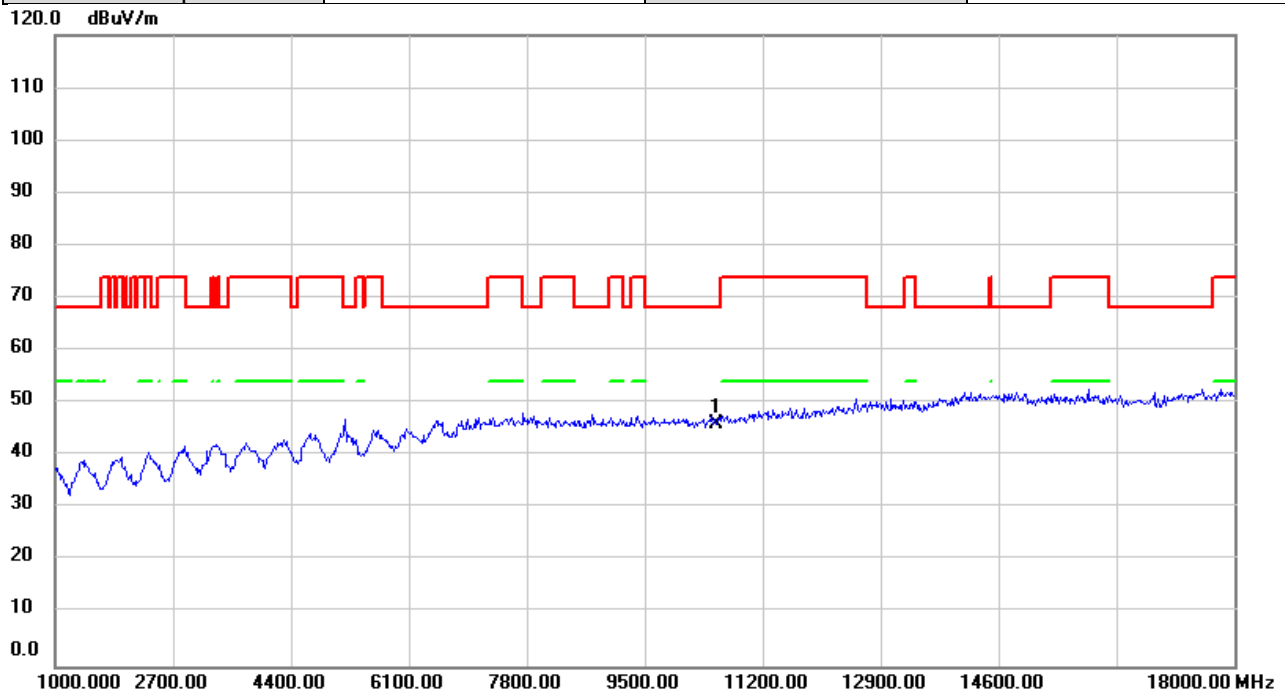


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	43.71	2.48	46.19	68.20	-22.01	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/29
Test Frequency	5260MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

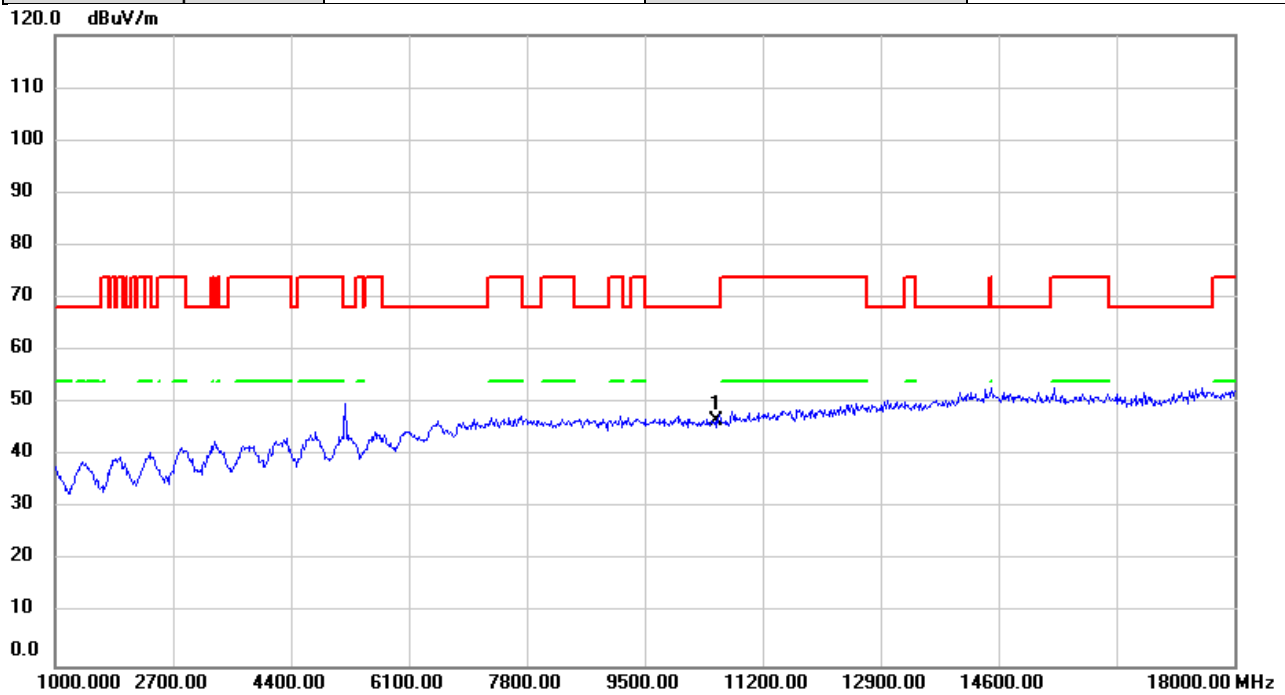


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	44.20	2.48	46.68	68.20	-21.52	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/29
Test Frequency	5280MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

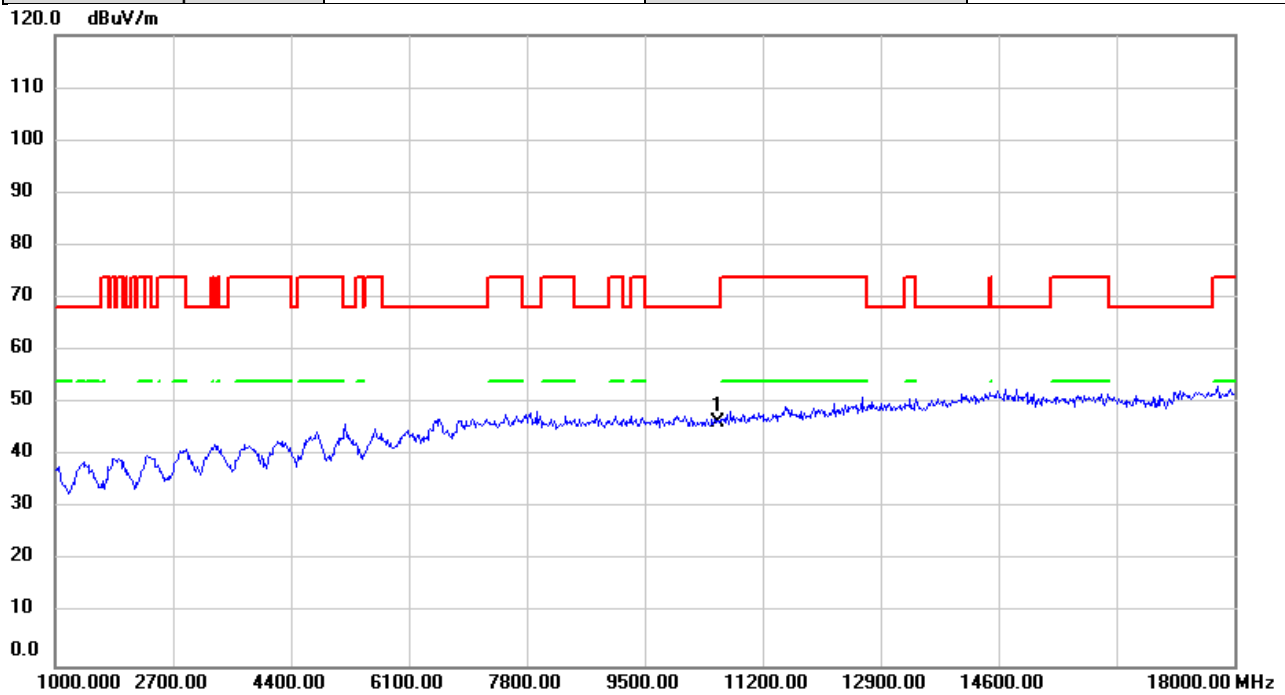


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10560.00	43.81	2.50	46.31	68.20	-21.89	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/29
Test Frequency	5280MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

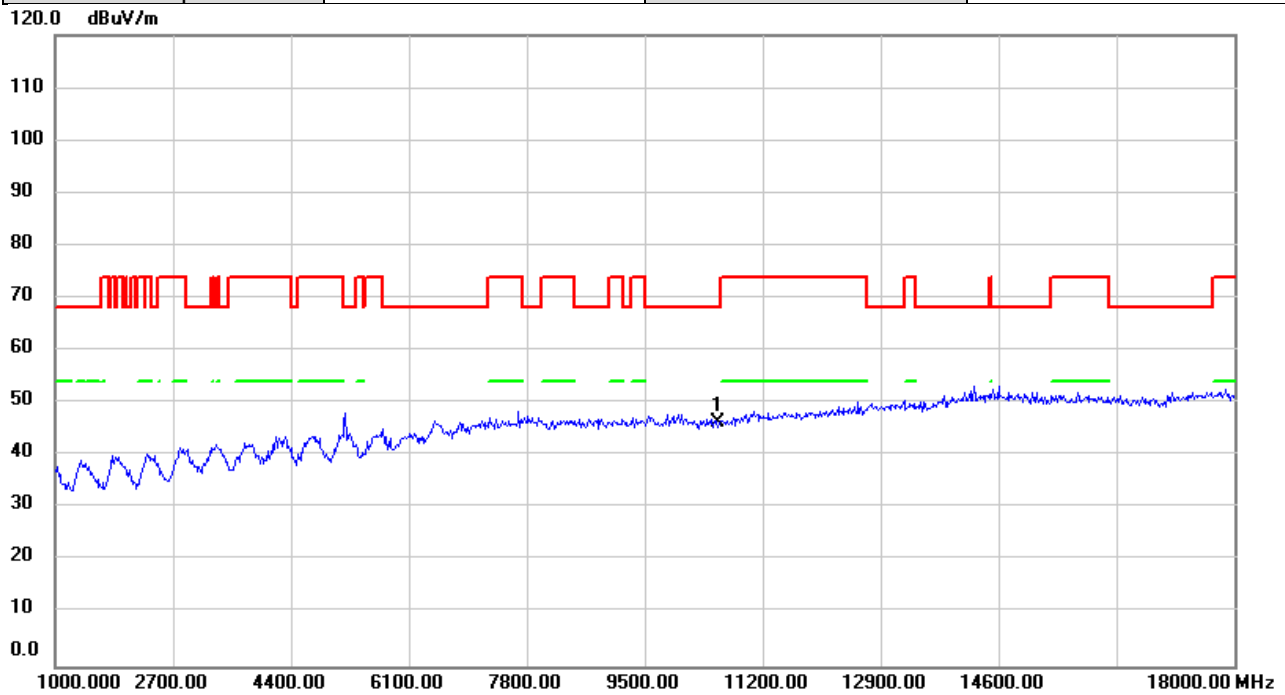


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10560.00	43.98	2.50	46.48	68.20	-21.72	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/29
Test Frequency	5320MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

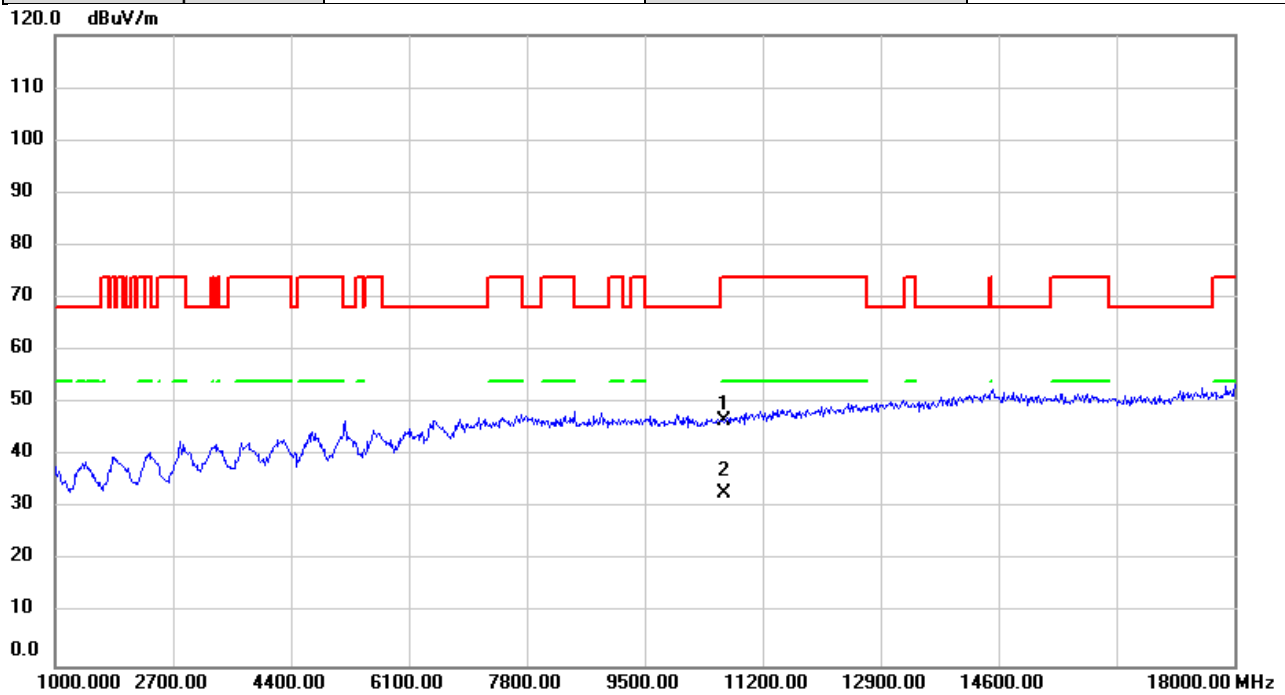


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.00	43.97	2.54	46.51	74.00	-27.49	peak	
2	*	10640.00	30.37	2.54	32.91	54.00	-21.09	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/29
Test Frequency	5320MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

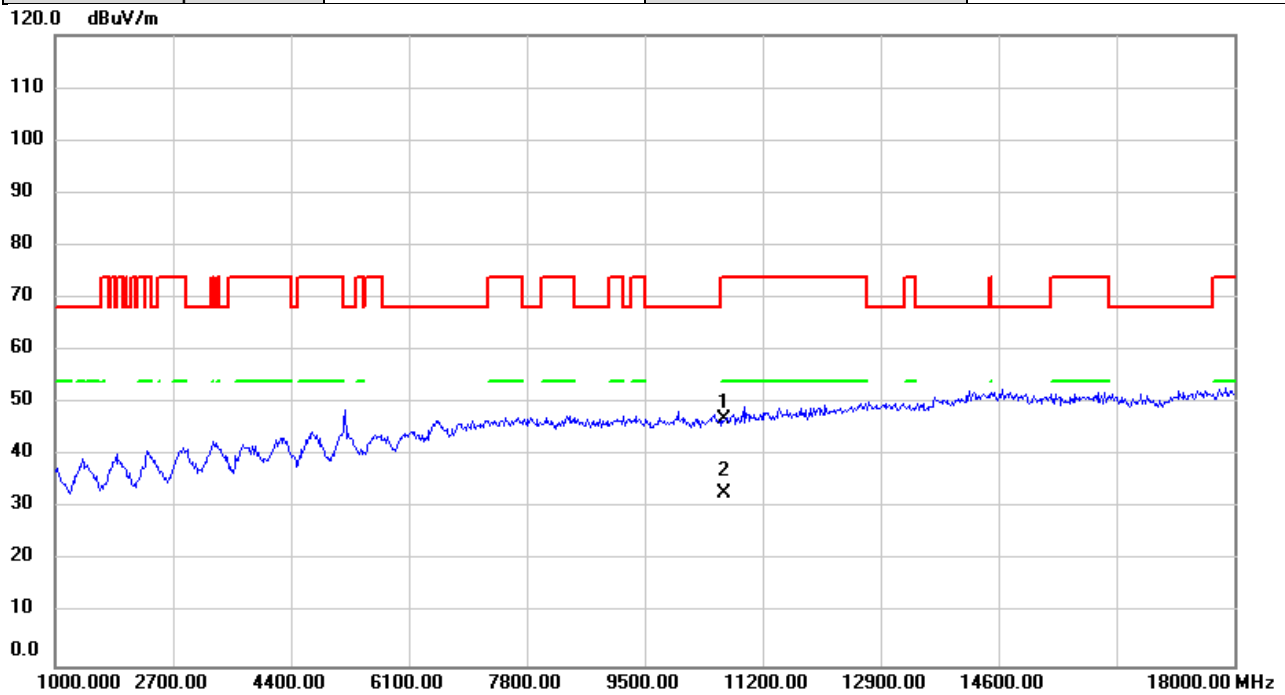


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.00	44.51	2.54	47.05	74.00	-26.95	peak	
2	*	10640.00	30.37	2.54	32.91	54.00	-21.09	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/29
Test Frequency	5500MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

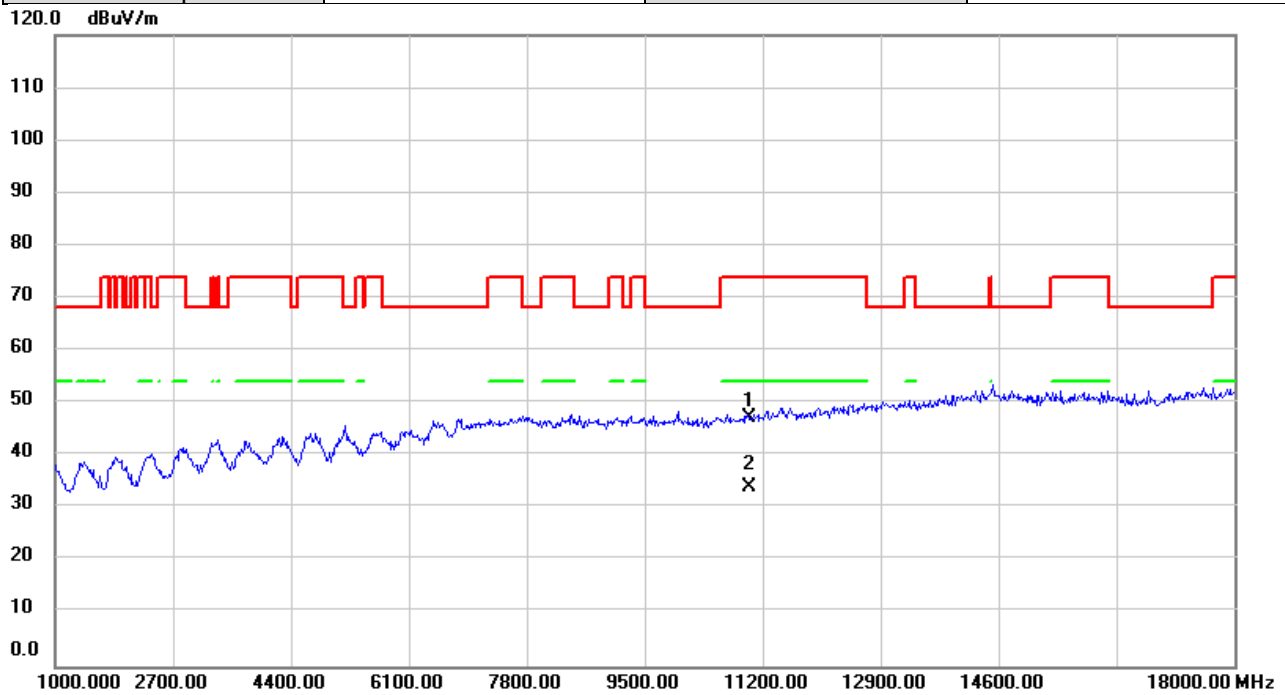


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11000.00	44.63	2.71	47.34	74.00	-26.66	peak	
2	*	11000.00	31.35	2.71	34.06	54.00	-19.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/29
Test Frequency	5500MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

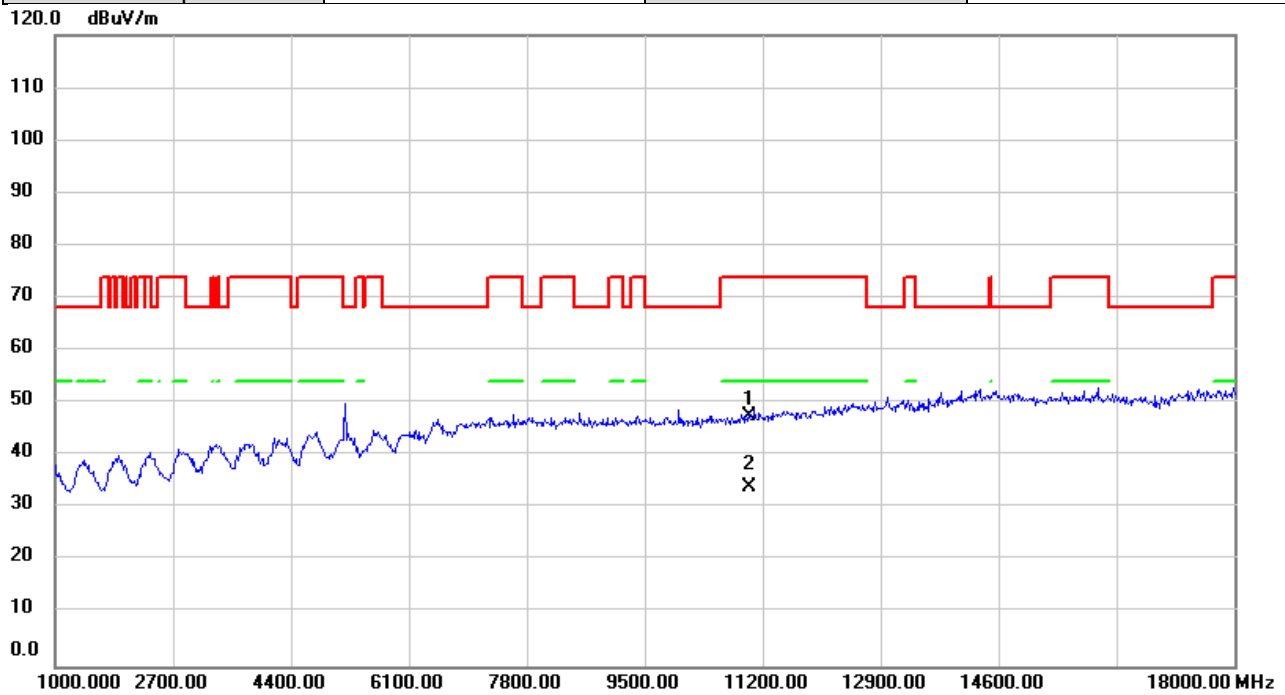


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	44.97	2.71	47.68	74.00	-26.32	peak	
2	*	11000.00	31.24	2.71	33.95	54.00	-20.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/29
Test Frequency	5600MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

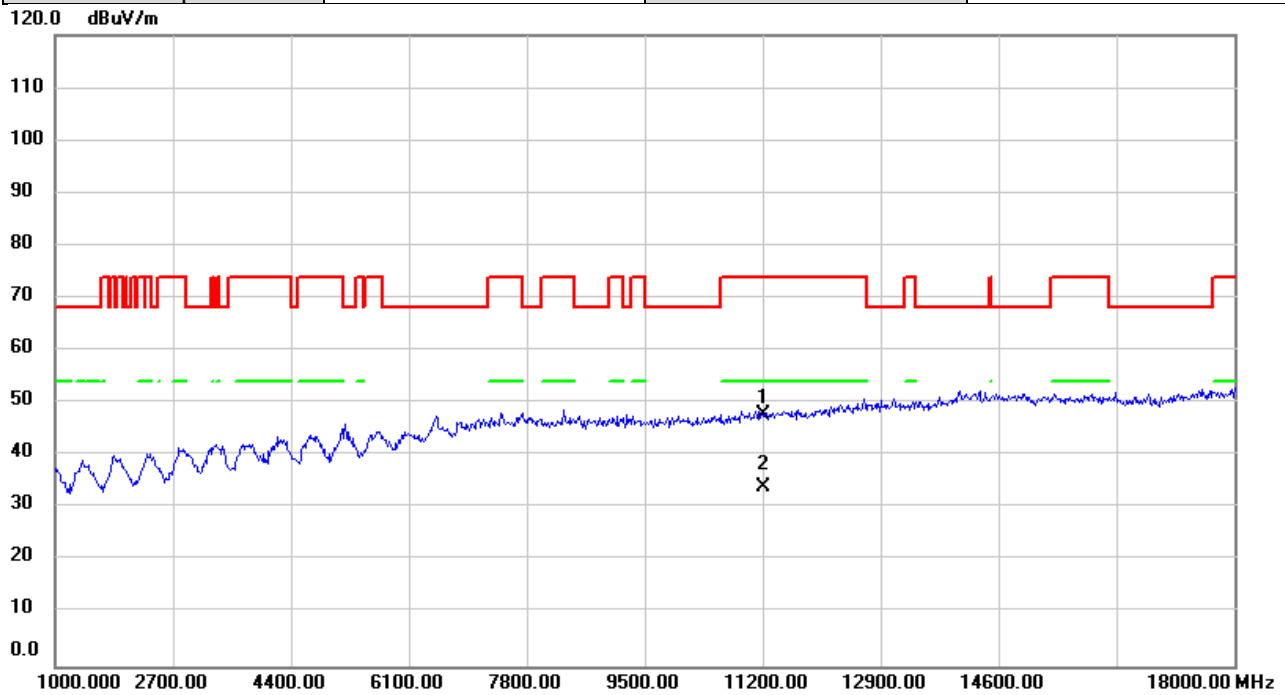


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11200.00	45.12	2.77	47.89	74.00	-26.11	peak	
2	*	11200.00	31.14	2.77	33.91	54.00	-20.09	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/29
Test Frequency	5600MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

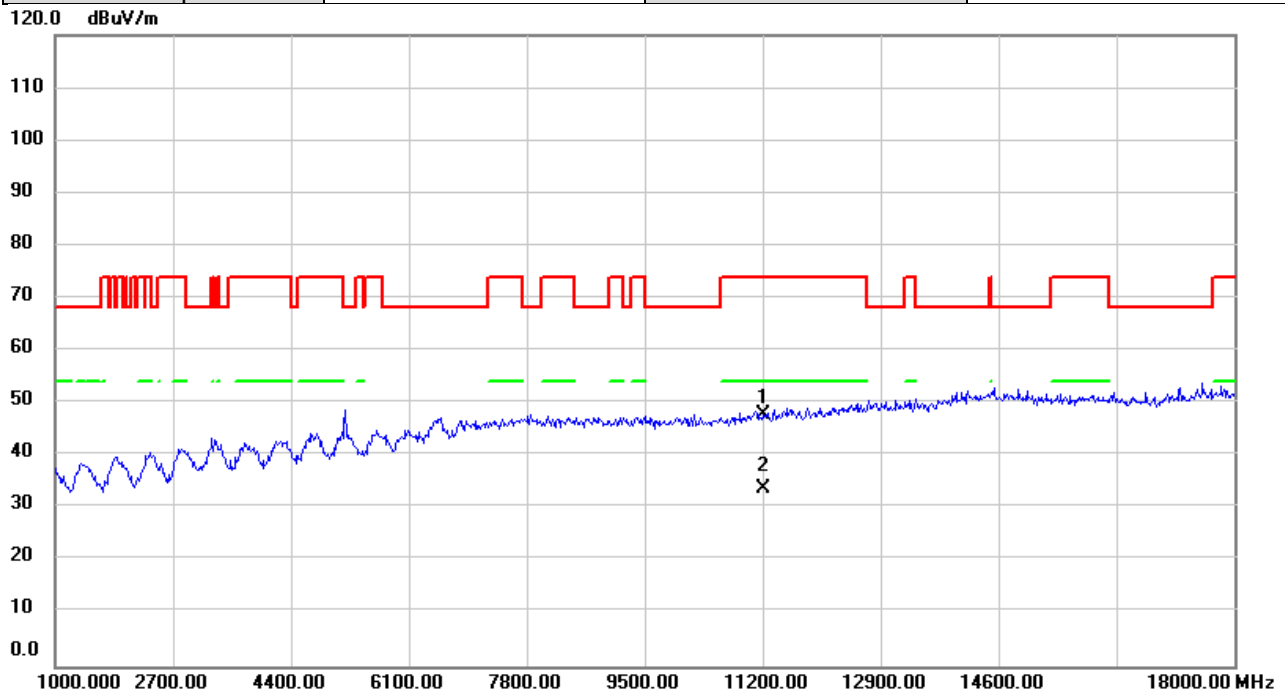


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11200.00	45.01	2.77	47.78	74.00	-26.22	peak	
2	*	11200.00	31.13	2.77	33.90	54.00	-20.10	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/29
Test Frequency	5700MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

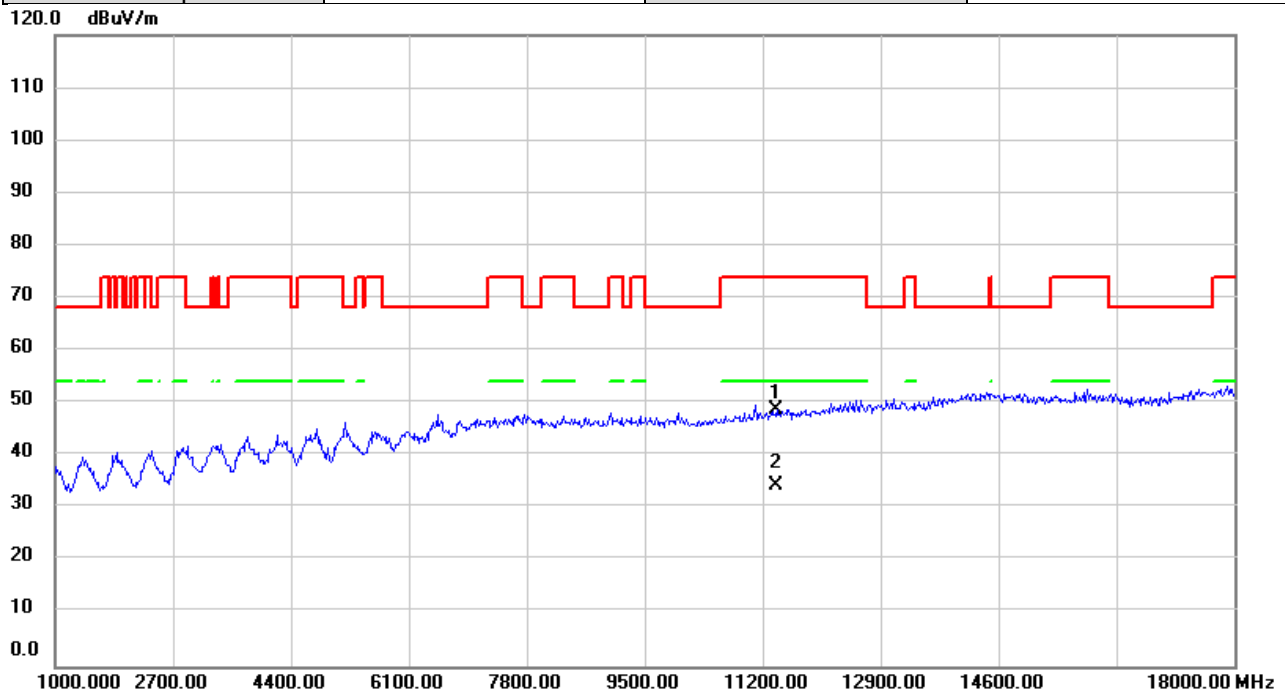


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.00	46.05	2.83	48.88	74.00	-25.12	peak	
2	*	11400.00	31.40	2.83	34.23	54.00	-19.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/29
Test Frequency	5700MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

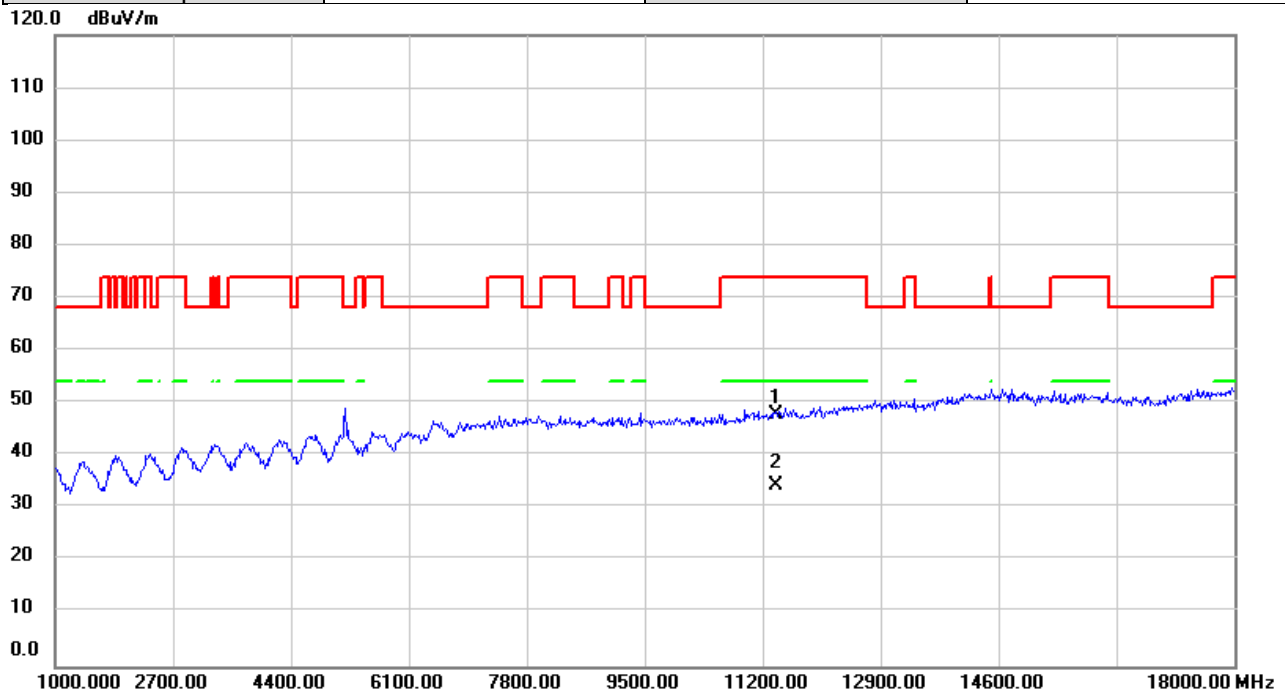


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.00	45.10	2.83	47.93	74.00	-26.07	peak	
2	*	11400.00	31.44	2.83	34.27	54.00	-19.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/29
Test Frequency	5720MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

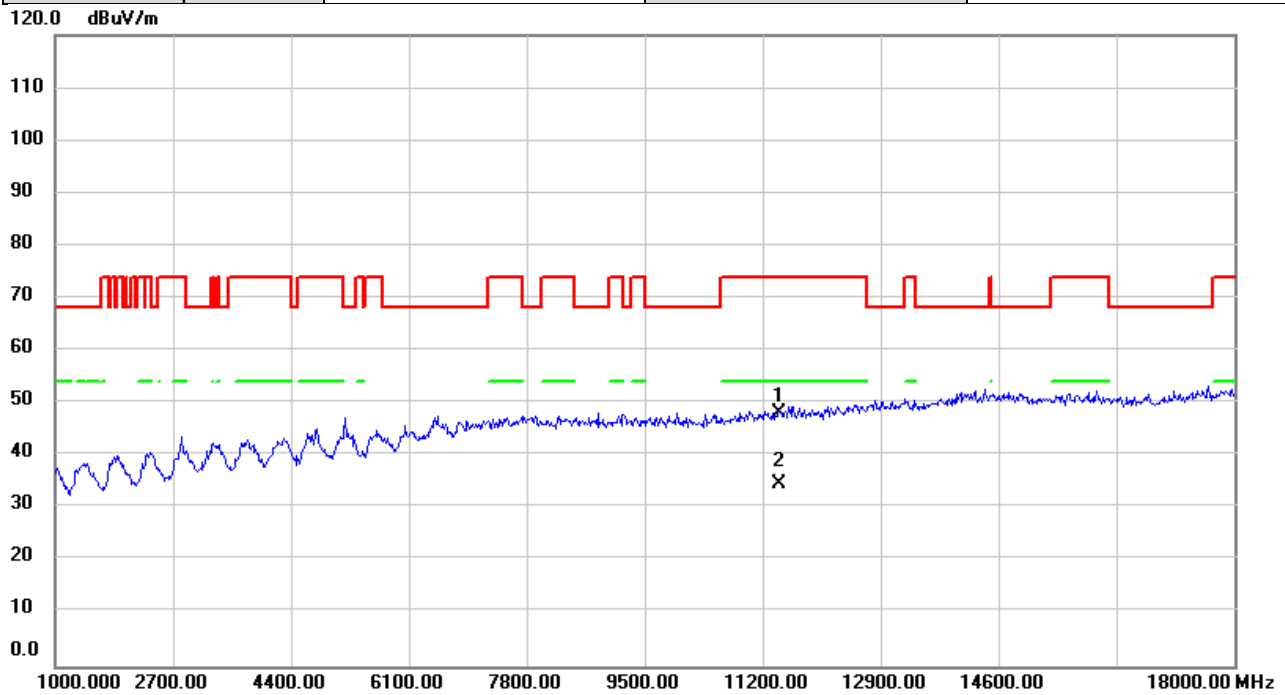


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11440.00	45.16	2.85	48.01	74.00	-25.99	peak	
2	*	11440.00	31.71	2.85	34.56	54.00	-19.44	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/29
Test Frequency	5720MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

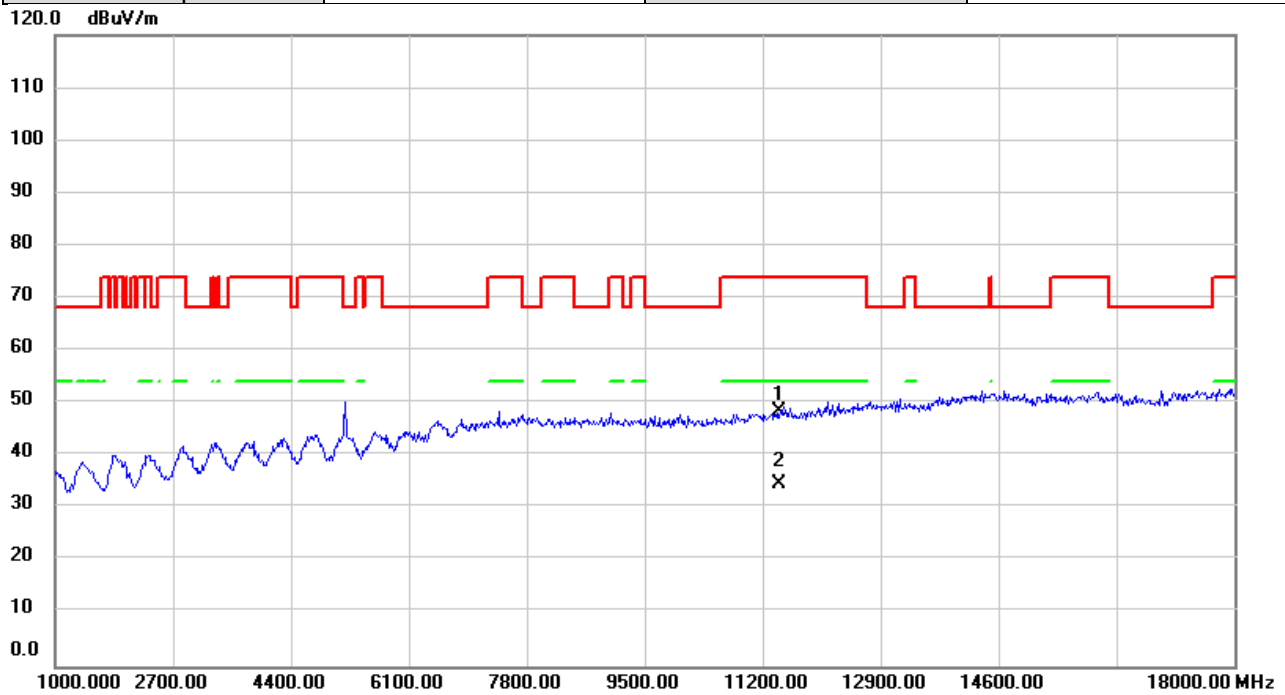


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11440.00	45.66	2.85	48.51	74.00	-25.49	peak	
2	*	11440.00	31.69	2.85	34.54	54.00	-19.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/29
Test Frequency	5745MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

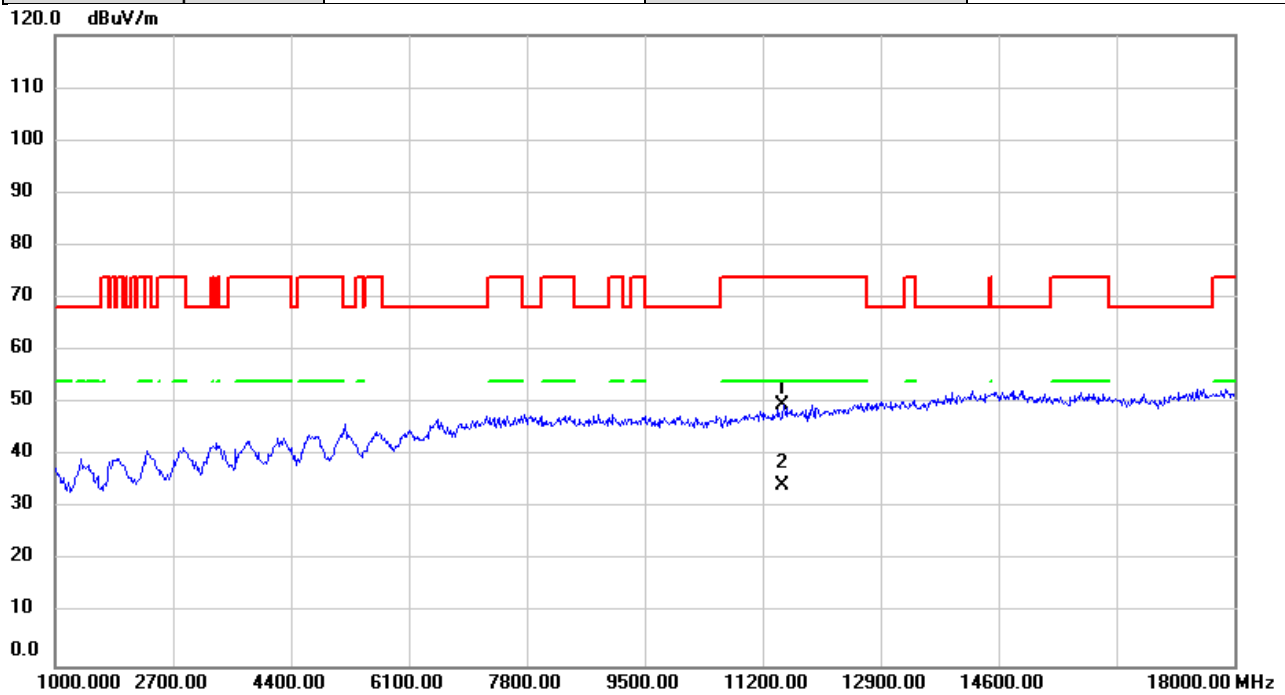


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	46.87	2.86	49.73	74.00	-24.27	peak	
2	*	11490.00	31.57	2.86	34.43	54.00	-19.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/29
Test Frequency	5745MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

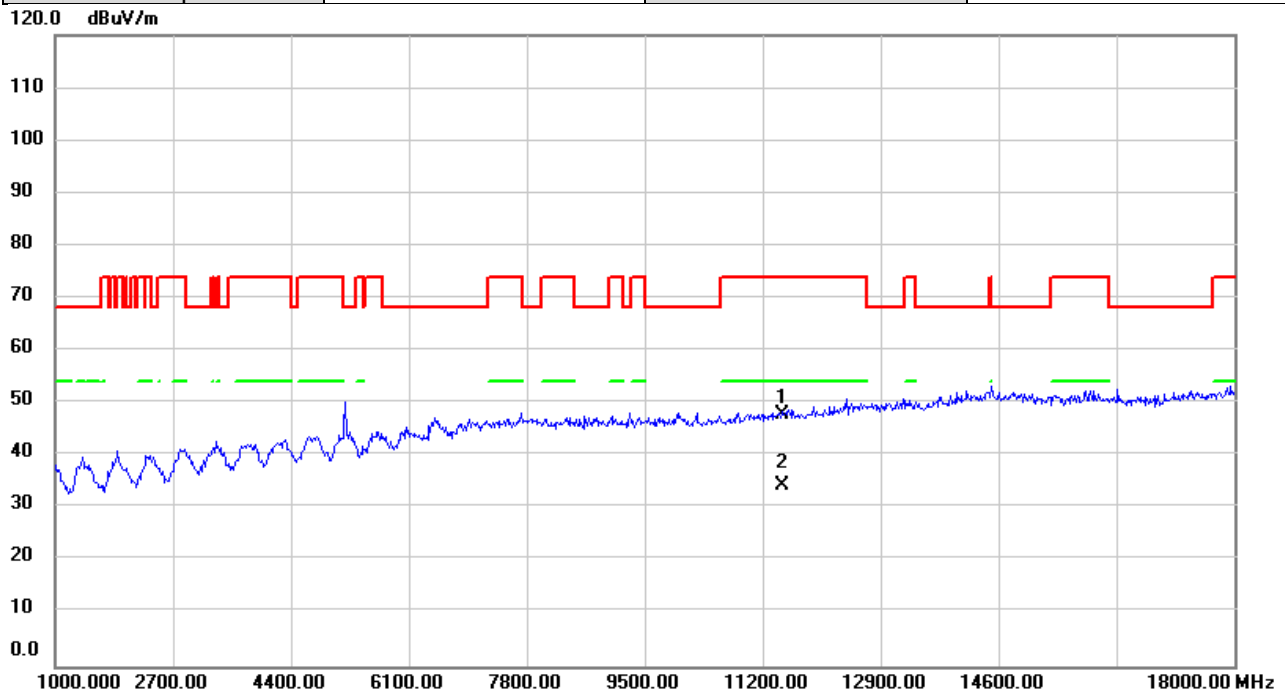


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	44.88	2.86	47.74	74.00	-26.26	peak	
2	*	11490.00	31.56	2.86	34.42	54.00	-19.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/29
Test Frequency	5785MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

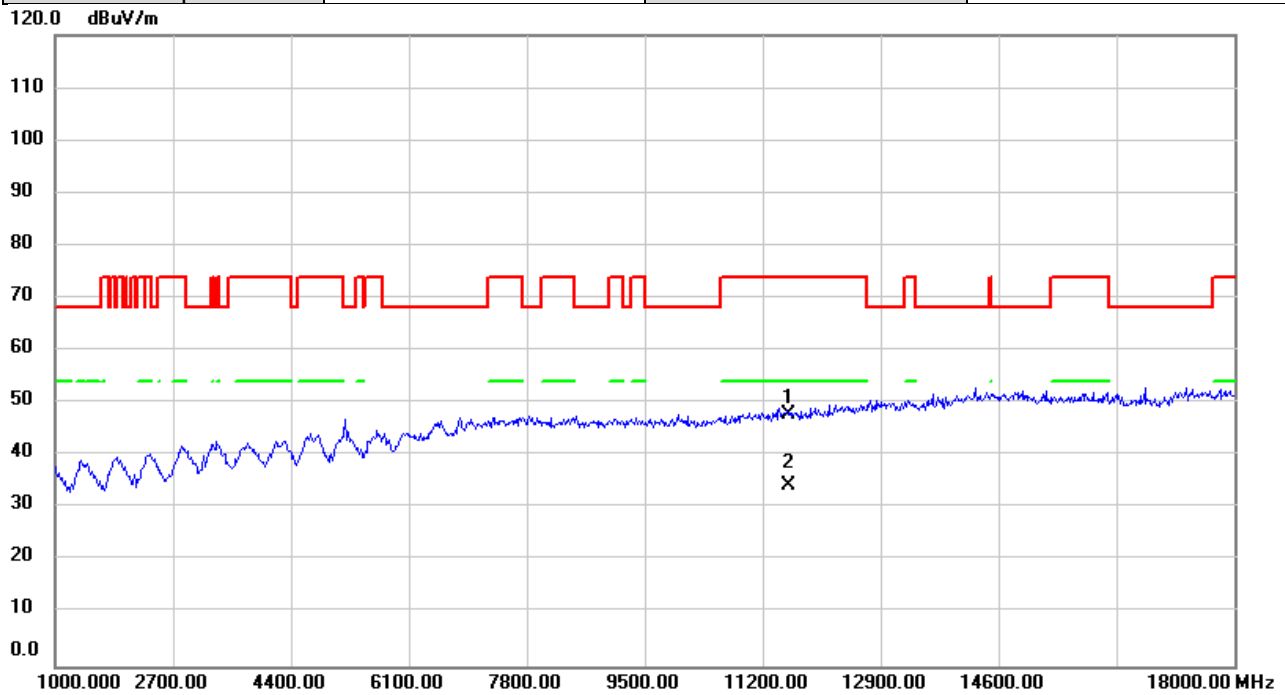


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	45.00	2.81	47.81	74.00	-26.19	peak	
2	*	11570.00	31.65	2.81	34.46	54.00	-19.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/29
Test Frequency	5785MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

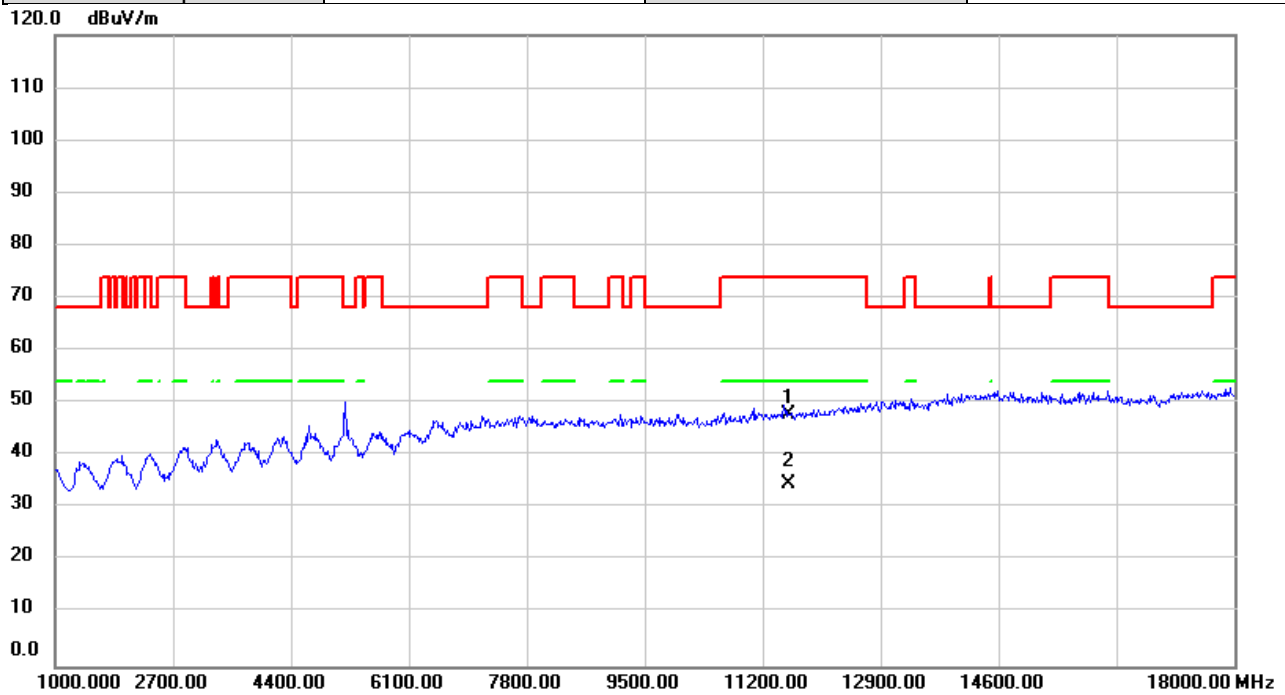


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	45.14	2.81	47.95	74.00	-26.05	peak	
2	*	11570.00	31.78	2.81	34.59	54.00	-19.41	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/29
Test Frequency	5825MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

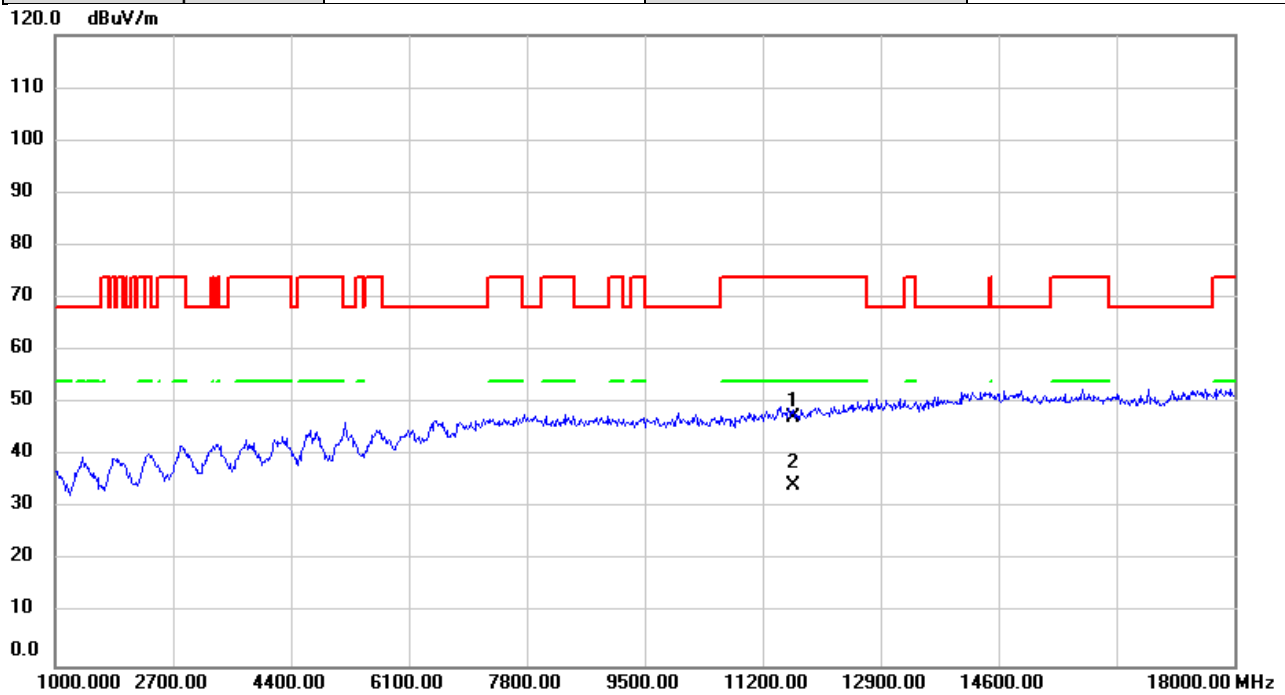


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	44.43	2.73	47.16	74.00	-26.84	peak	
2	*	11650.00	31.49	2.73	34.22	54.00	-19.78	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/12/29
Test Frequency	5825MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

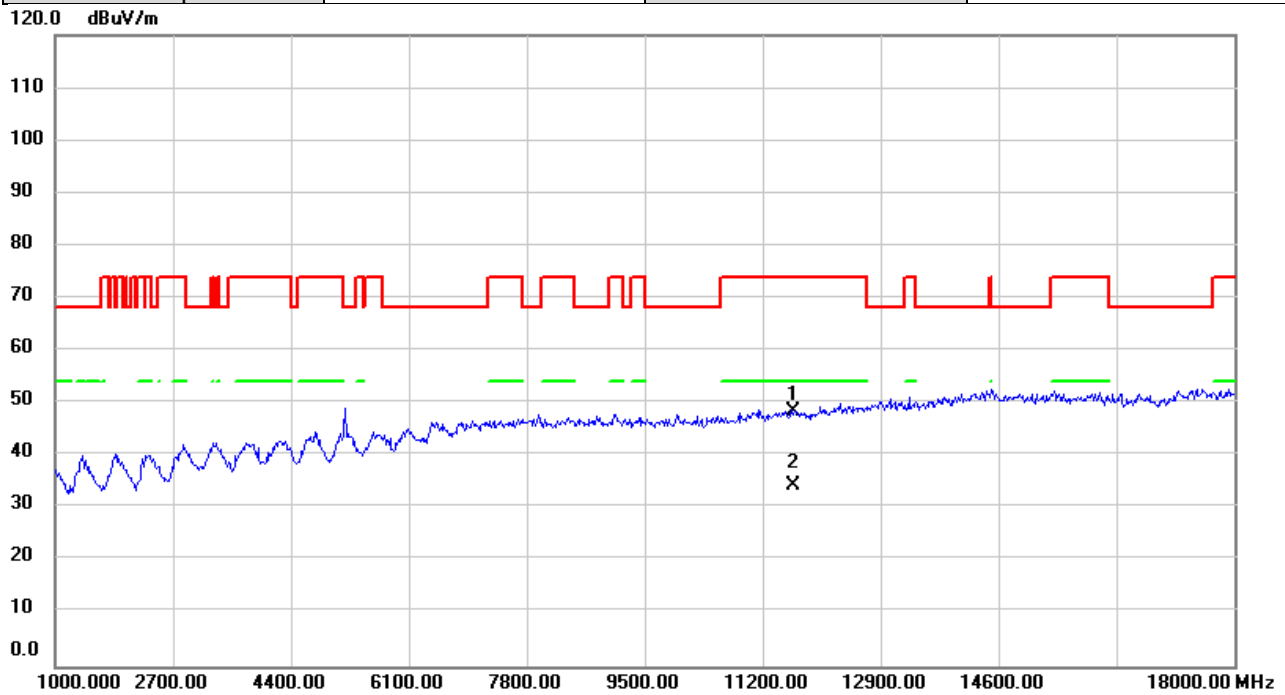


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	45.66	2.73	48.39	74.00	-25.61	peak	
2	*	11650.00	31.57	2.73	34.30	54.00	-19.70	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/29
Test Frequency	5190MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

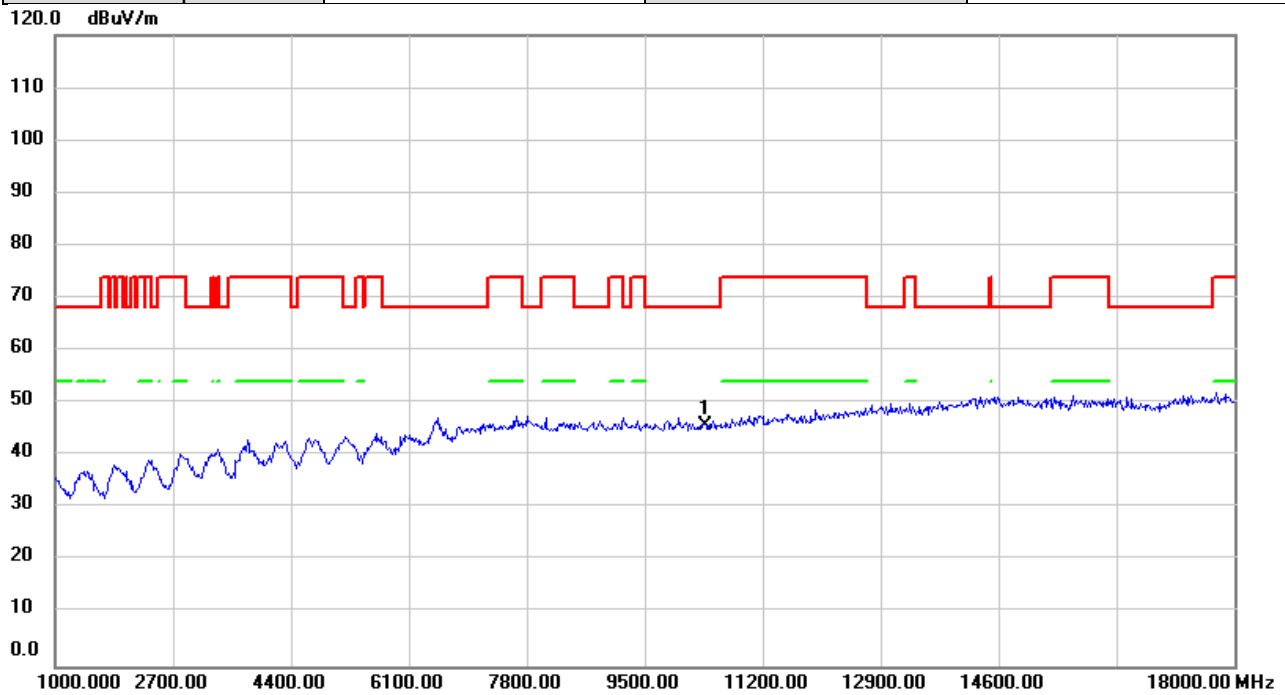


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	43.16	2.57	45.73	68.20	-22.47	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/29
Test Frequency	5190MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

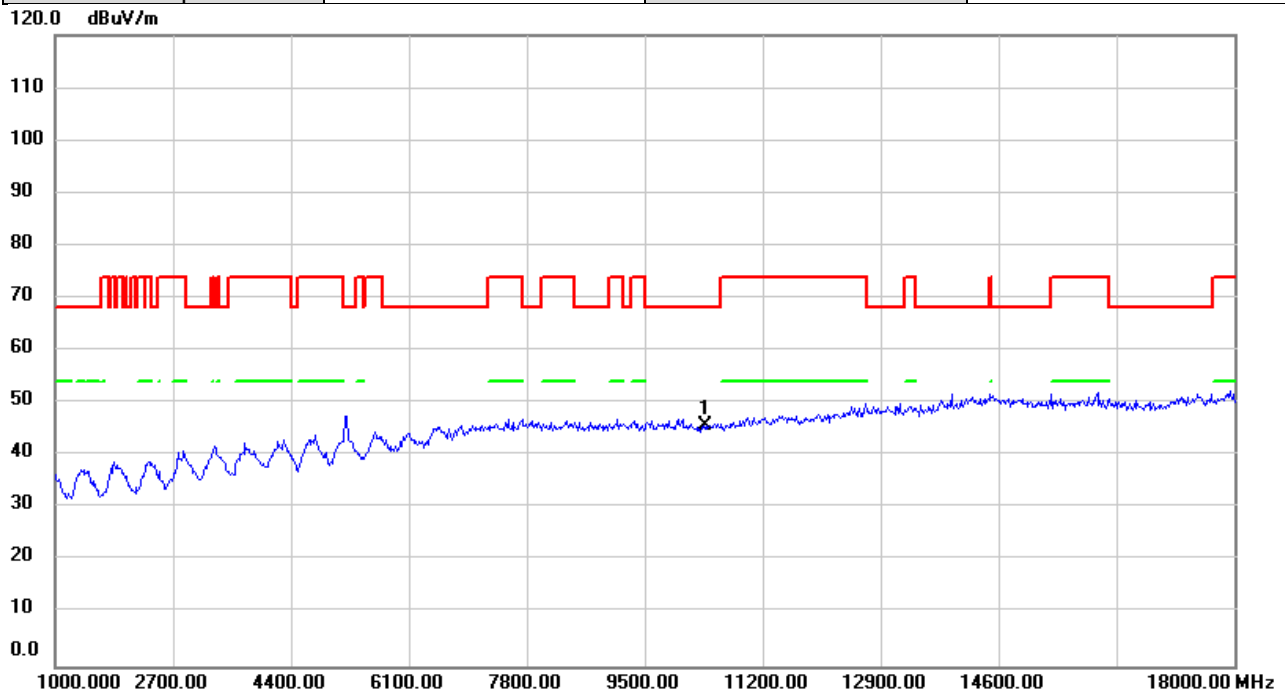


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	43.17	2.57	45.74	68.20	-22.46	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/29
Test Frequency	5230MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

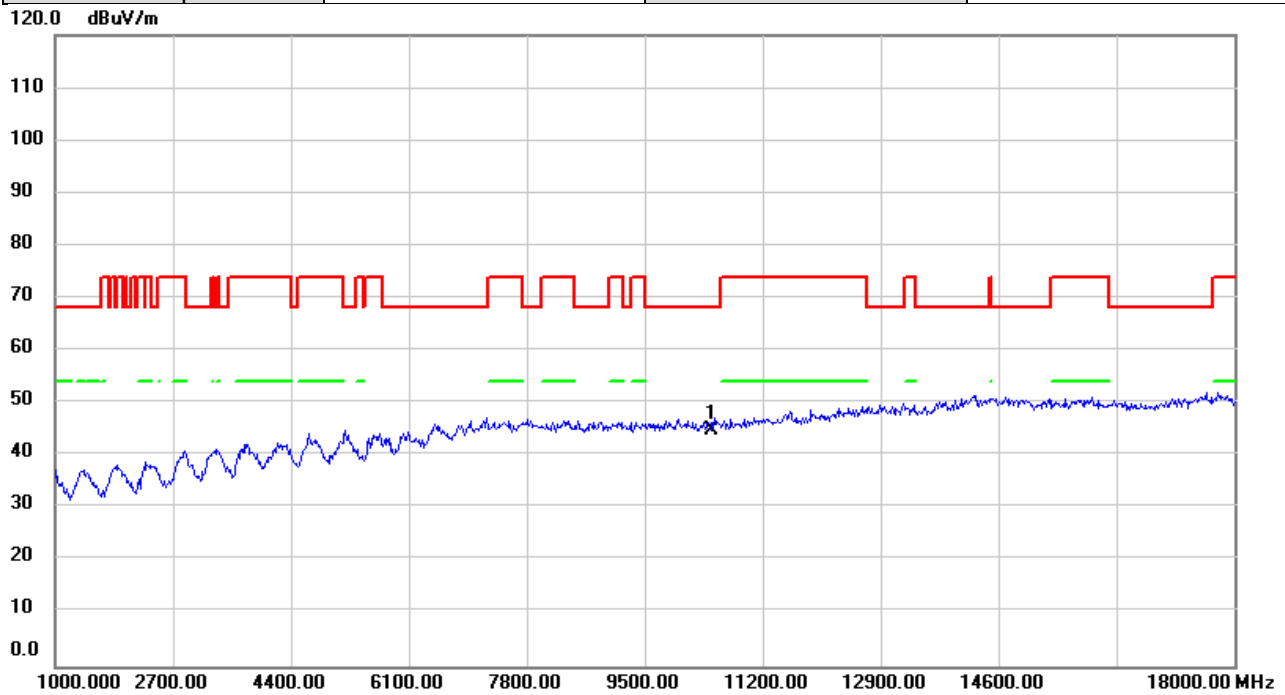


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	42.47	2.50	44.97	68.20	-23.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/29
Test Frequency	5230MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

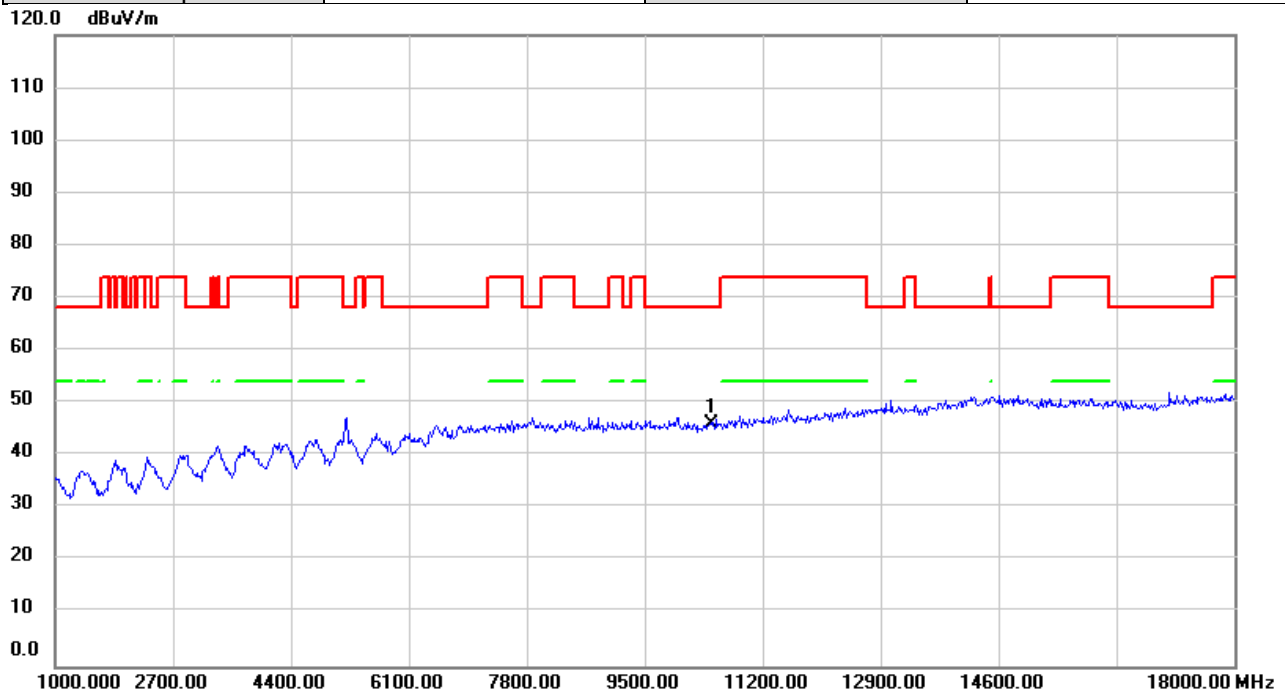


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	43.61	2.50	46.11	68.20	-22.09	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/29
Test Frequency	5270MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

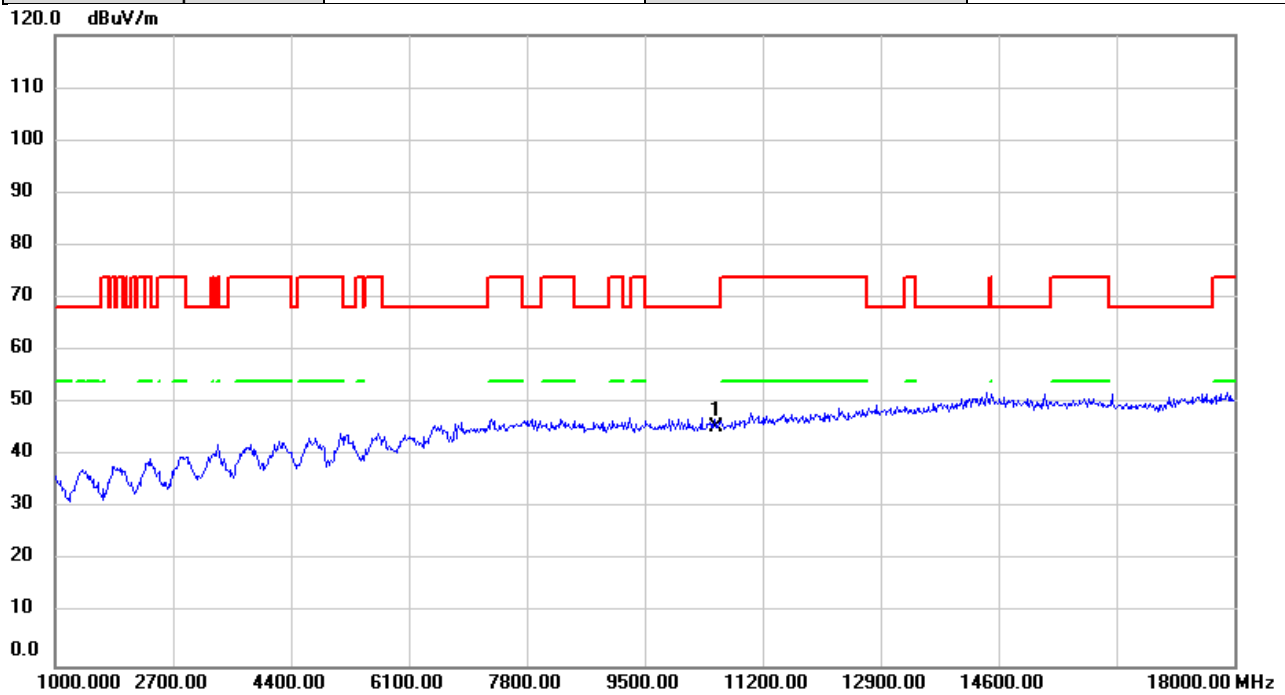


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	42.98	2.49	45.47	68.20	-22.73	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/29
Test Frequency	5270MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

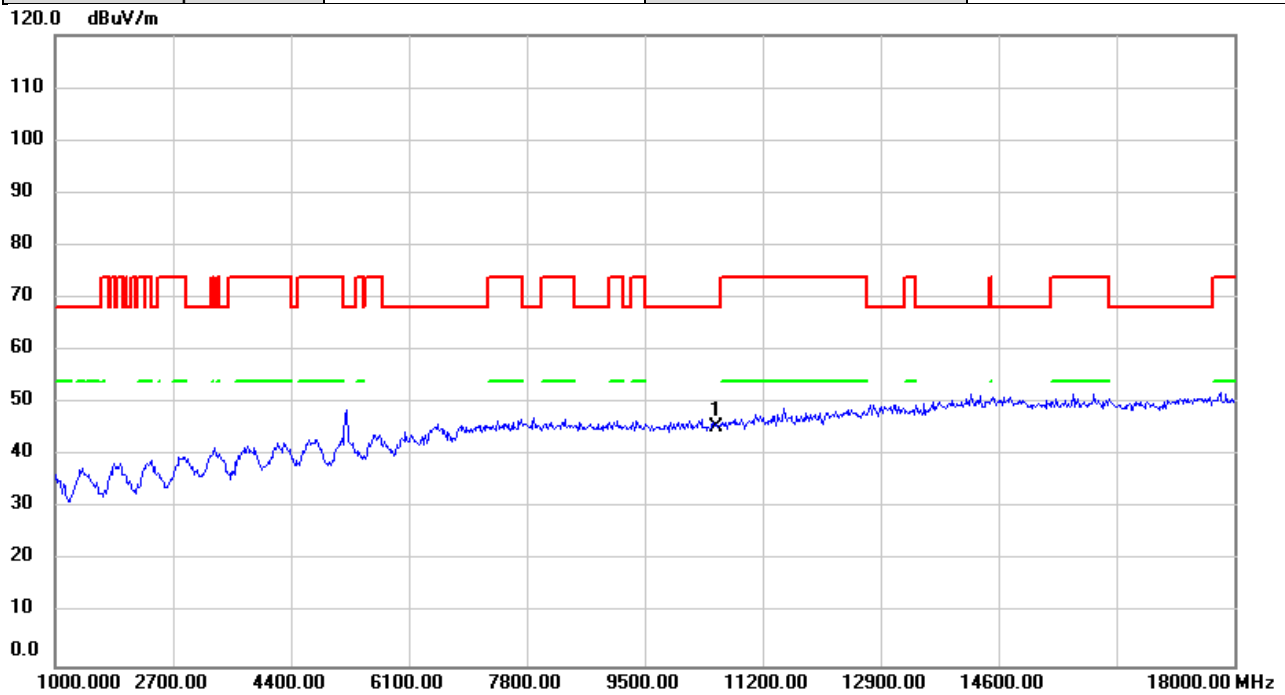


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	42.87	2.49	45.36	68.20	-22.84	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/29
Test Frequency	5310MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

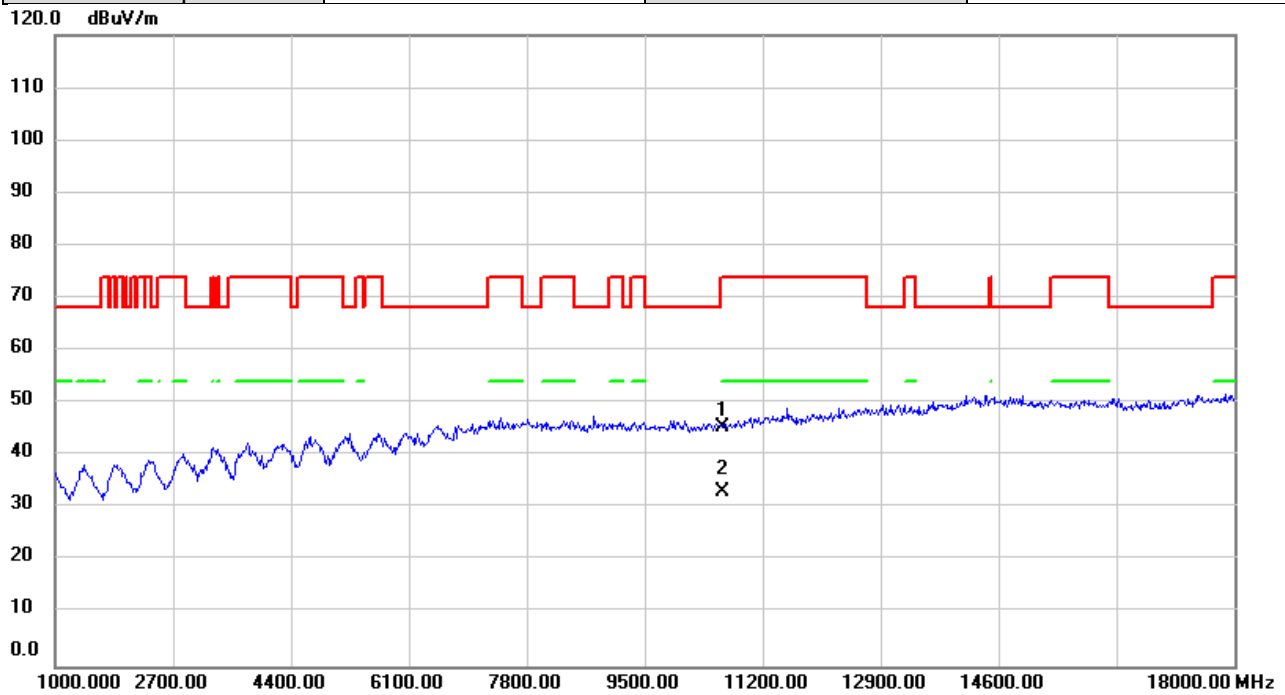


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	42.86	2.53	45.39	74.00	-28.61	peak	
2	*	10620.00	30.50	2.53	33.03	54.00	-20.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/29
Test Frequency	5310MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

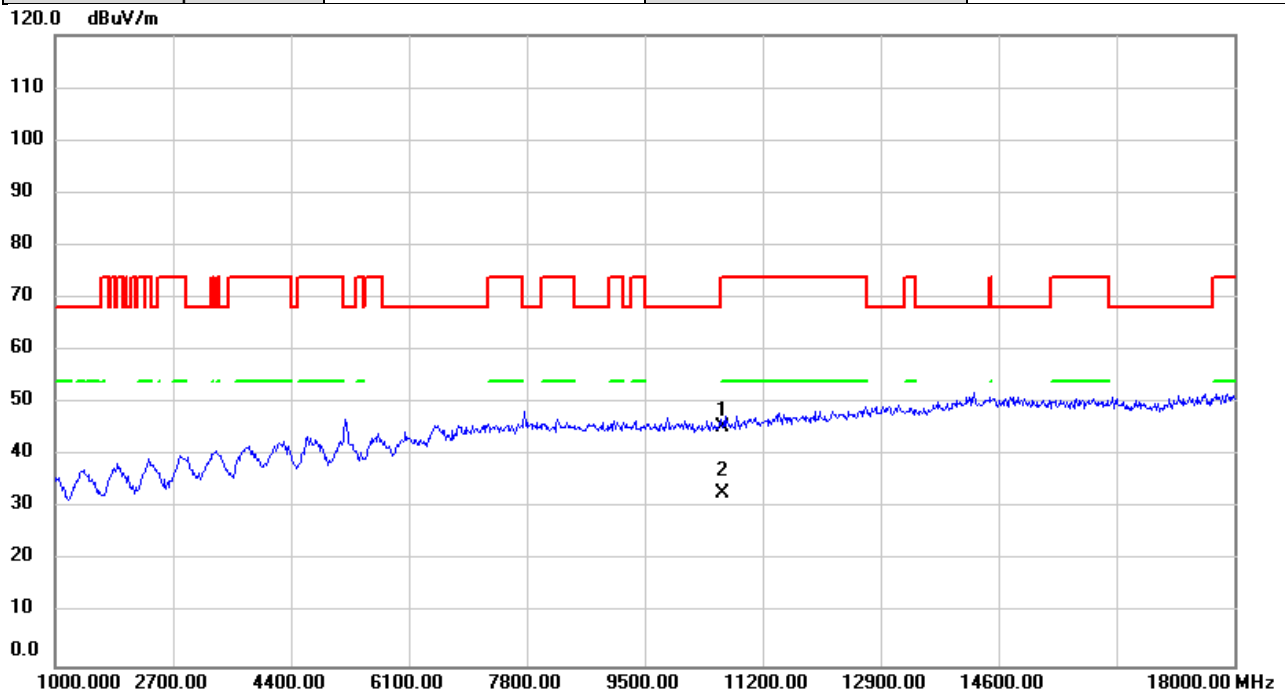


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	43.06	2.53	45.59	74.00	-28.41	peak	
2	*	10620.00	30.45	2.53	32.98	54.00	-21.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/29
Test Frequency	5510MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

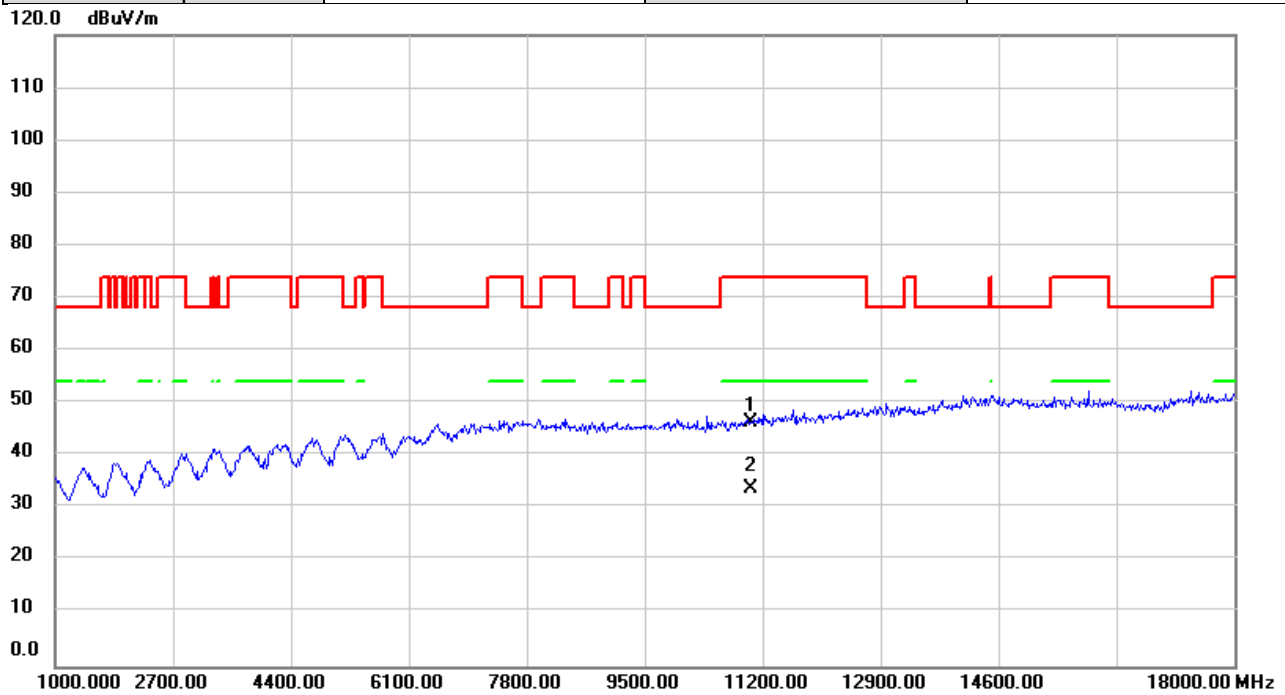


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11020.00	43.75	2.71	46.46	74.00	-27.54	peak	
2	*	11020.00	31.18	2.71	33.89	54.00	-20.11	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/29
Test Frequency	5510MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

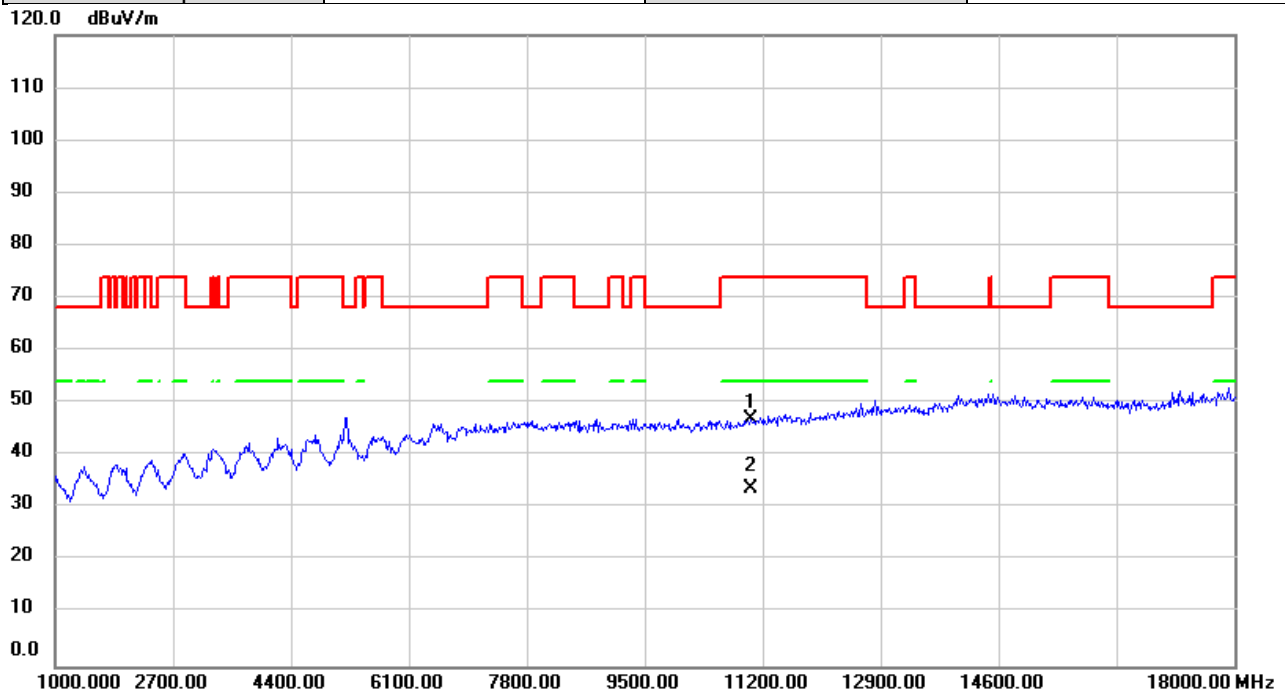


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	44.21	2.71	46.92	74.00	-27.08	peak	
2	*	11020.00	31.18	2.71	33.89	54.00	-20.11	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/29
Test Frequency	5590MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

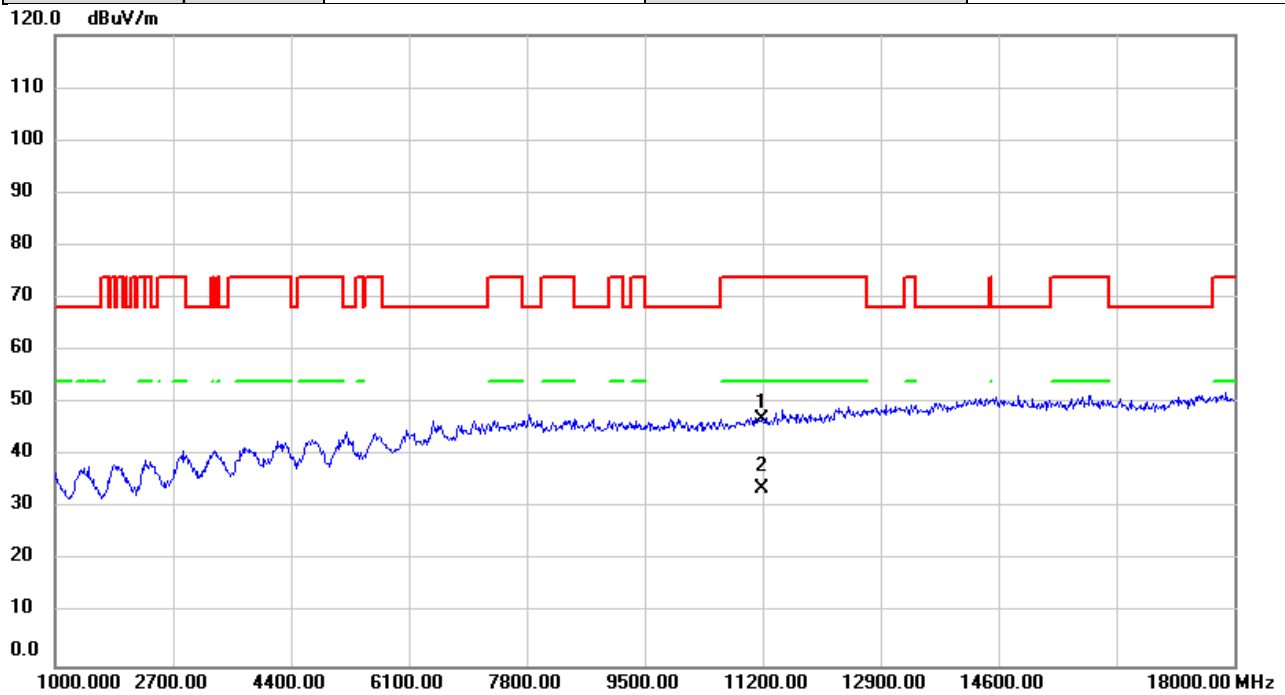


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11180.00	44.31	2.76	47.07	74.00	-26.93	peak	
2	*	11180.00	31.05	2.76	33.81	54.00	-20.19	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/29
Test Frequency	5590MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

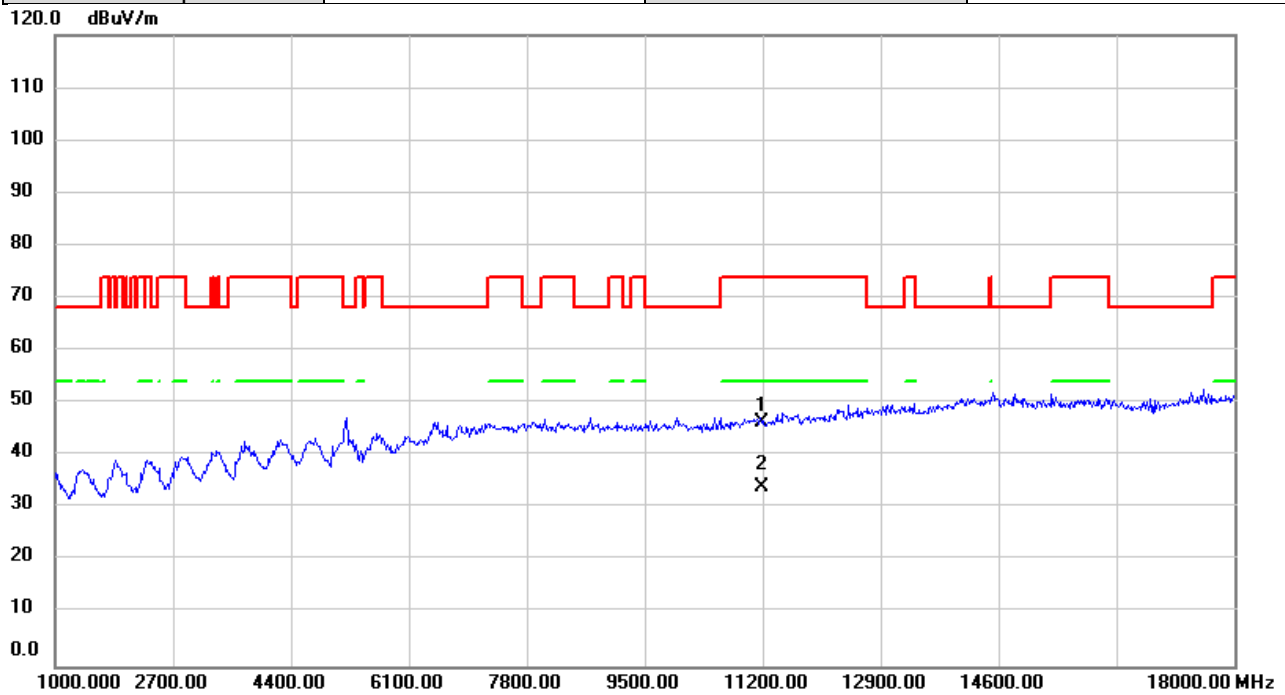


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11180.00	43.44	2.76	46.20	74.00	-27.80	peak	
2	*	11180.00	31.16	2.76	33.92	54.00	-20.08	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/29
Test Frequency	5670MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

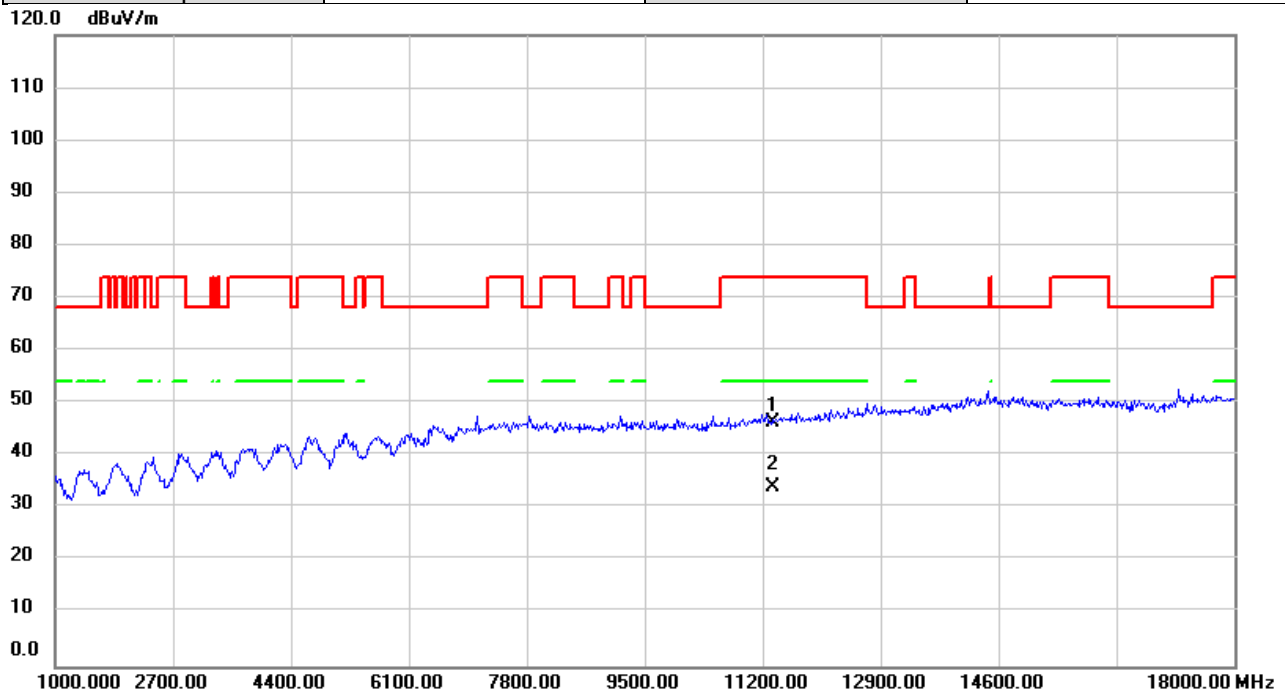


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	43.46	2.81	46.27	74.00	-27.73	peak	
2	*	11340.00	31.38	2.81	34.19	54.00	-19.81	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/29
Test Frequency	5670MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

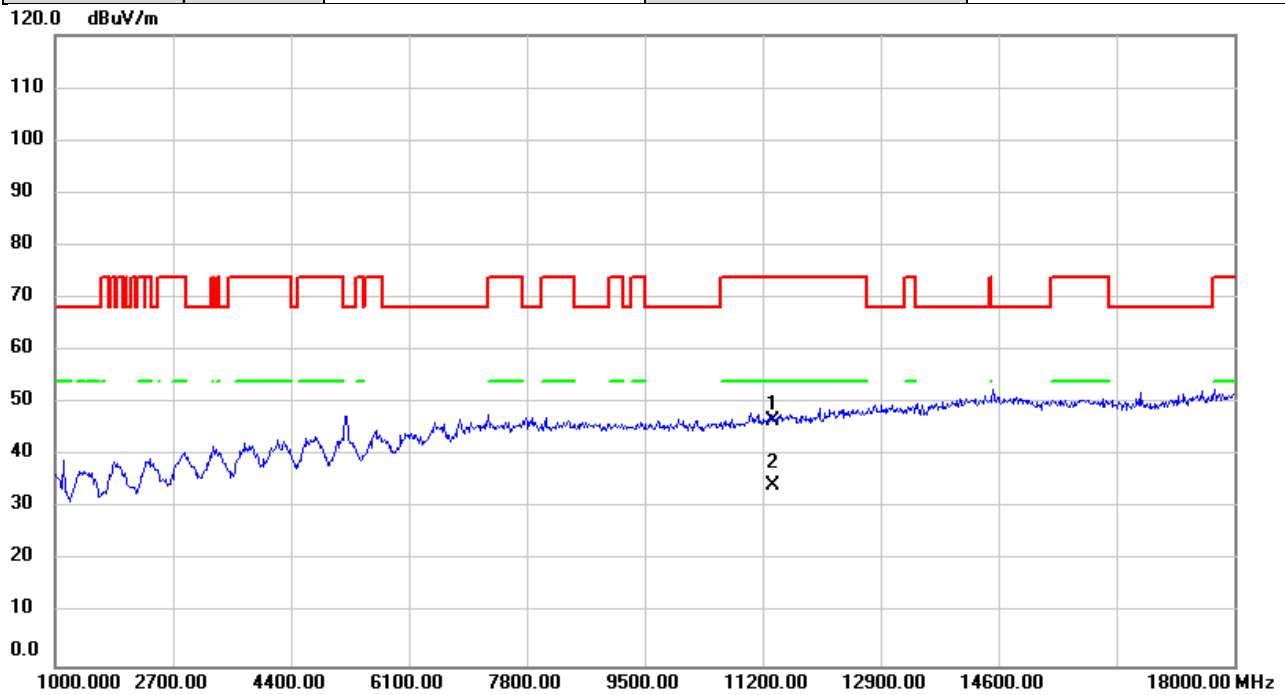


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	43.83	2.81	46.64	74.00	-27.36	peak	
2	*	11340.00	31.43	2.81	34.24	54.00	-19.76	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/29
Test Frequency	5710MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

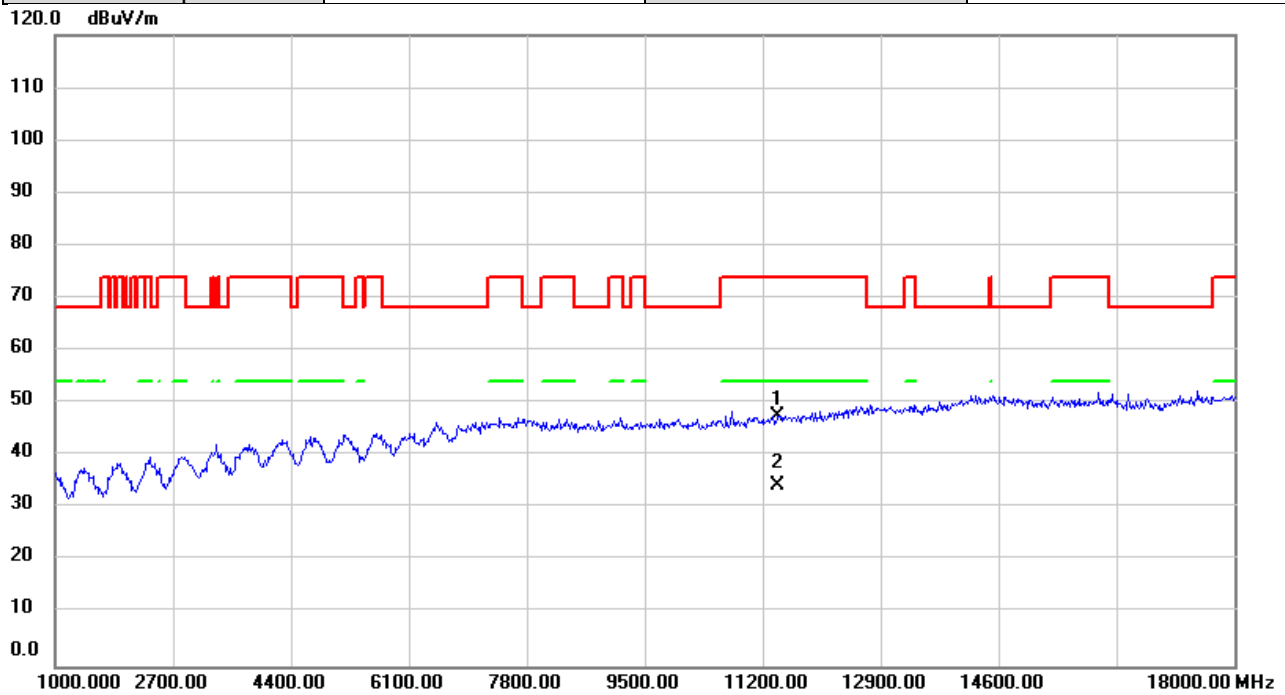


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11420.00	44.71	2.84	47.55	74.00	-26.45	peak	
2	*	11420.00	31.61	2.84	34.45	54.00	-19.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/29
Test Frequency	5710MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

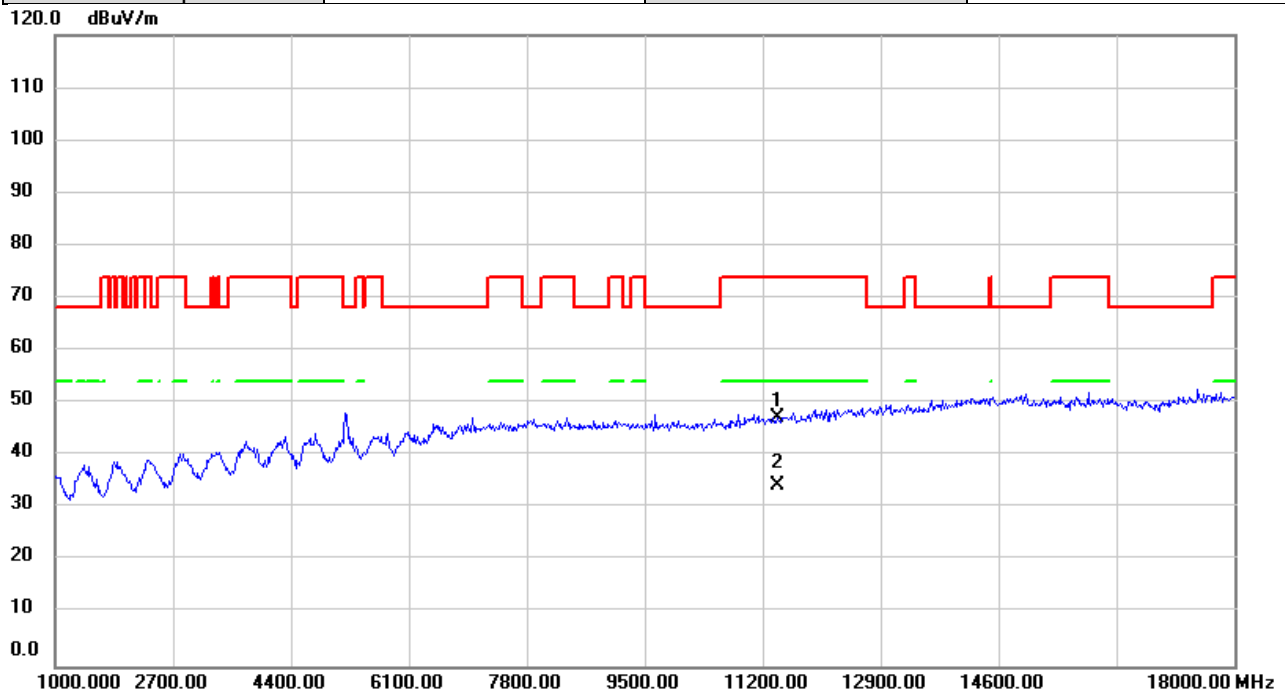


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11420.00	44.32	2.84	47.16	74.00	-26.84	peak	
2	*	11420.00	31.66	2.84	34.50	54.00	-19.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/29
Test Frequency	5755MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

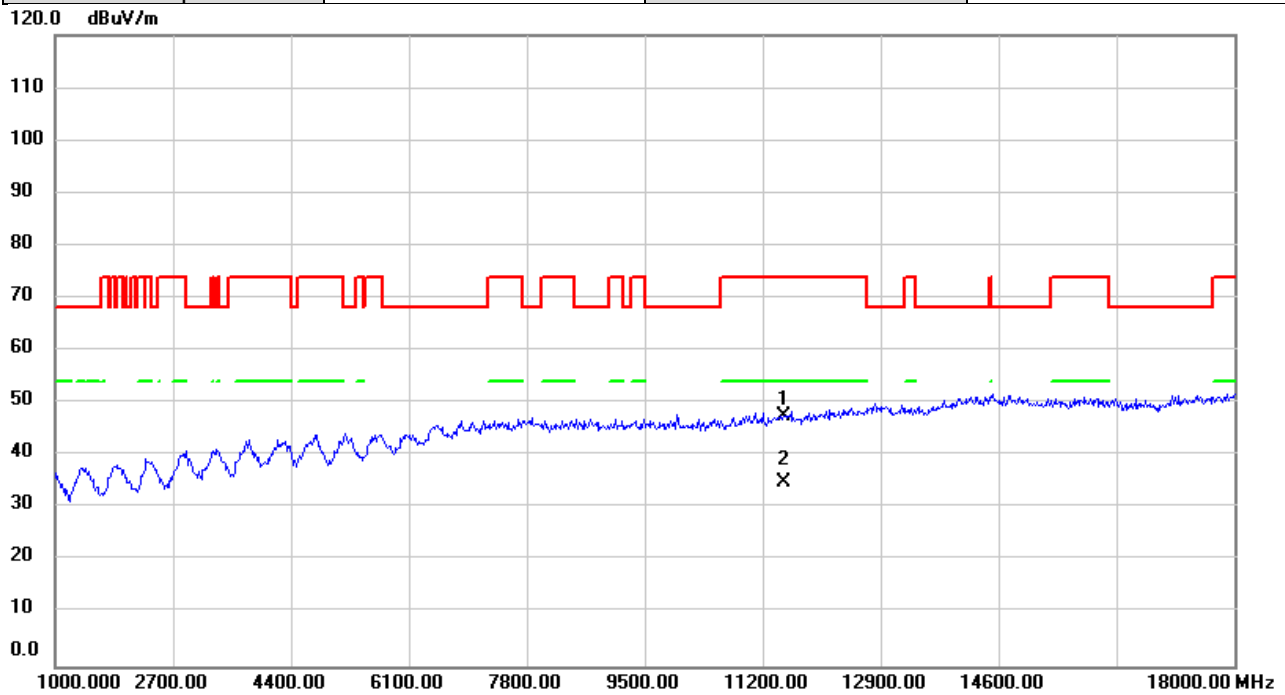


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11510.00	44.80	2.85	47.65	74.00	-26.35	peak	
2	*	11510.00	31.97	2.85	34.82	54.00	-19.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/29
Test Frequency	5755MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

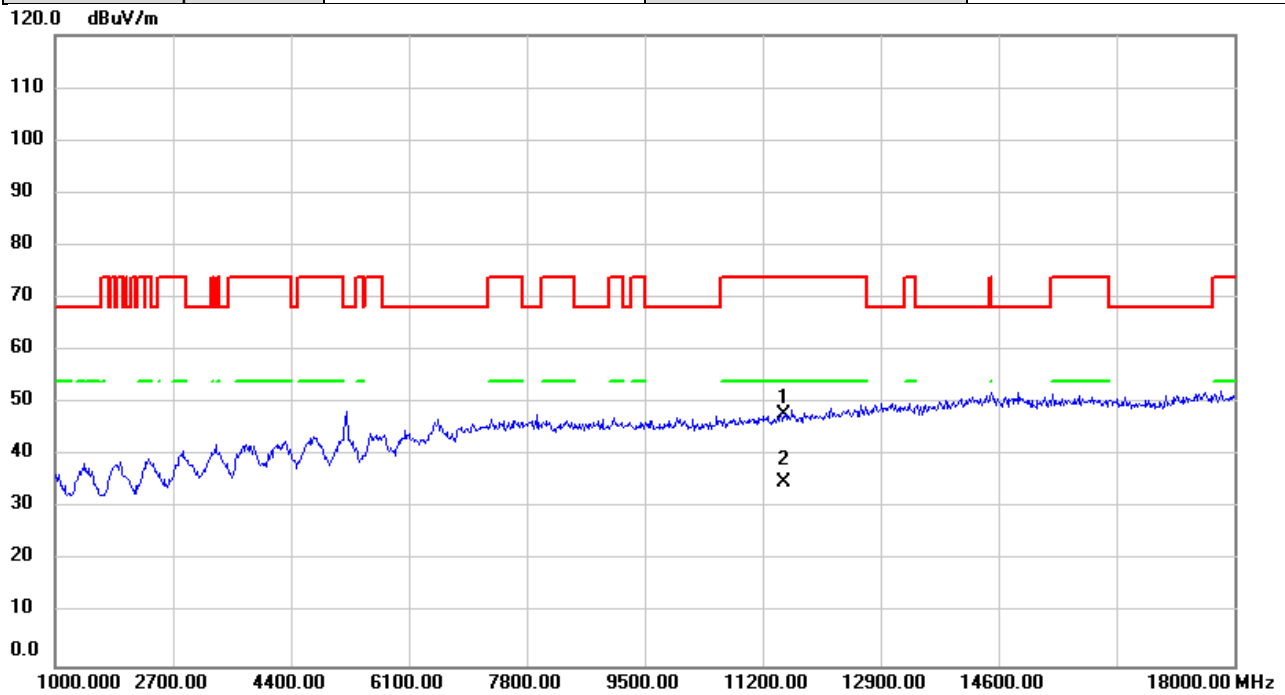


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11510.00	45.14	2.85	47.99	74.00	-26.01	peak	
2	*	11510.00	32.01	2.85	34.86	54.00	-19.14	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/29
Test Frequency	5795MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

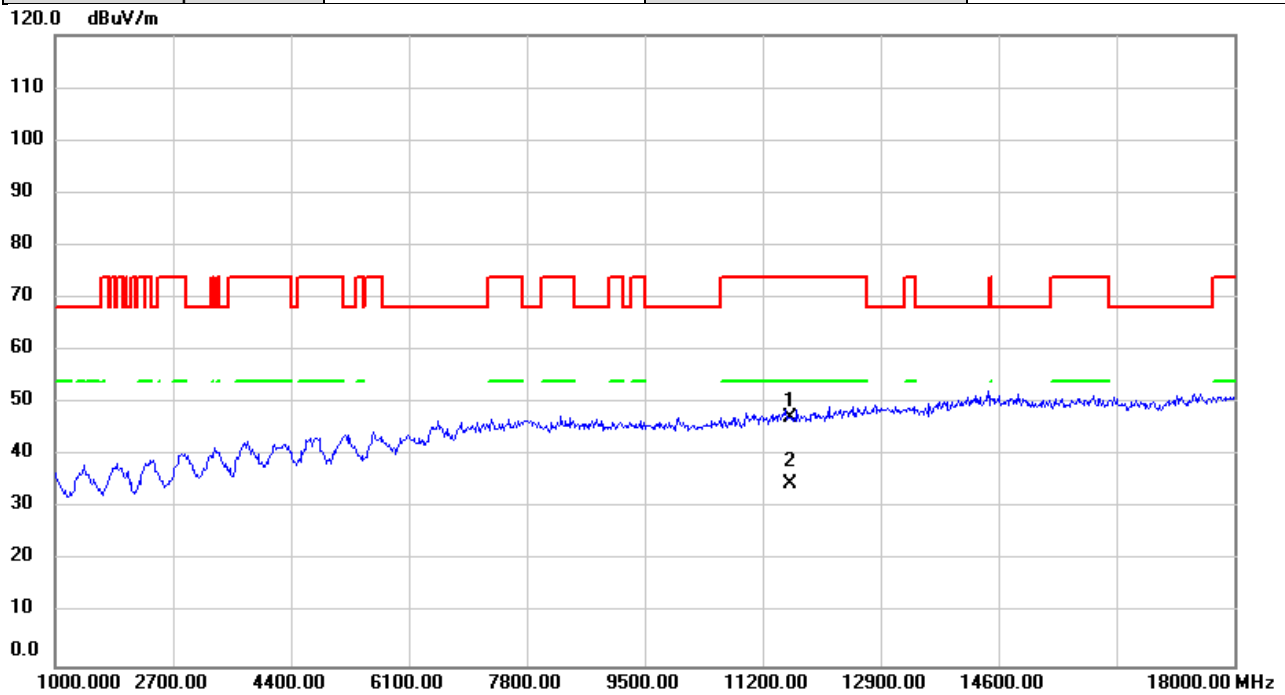


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11590.00	44.45	2.79	47.24	74.00	-26.76	peak	
2	*	11590.00	31.79	2.79	34.58	54.00	-19.42	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT40)	Test Date	2025/12/29
Test Frequency	5795MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

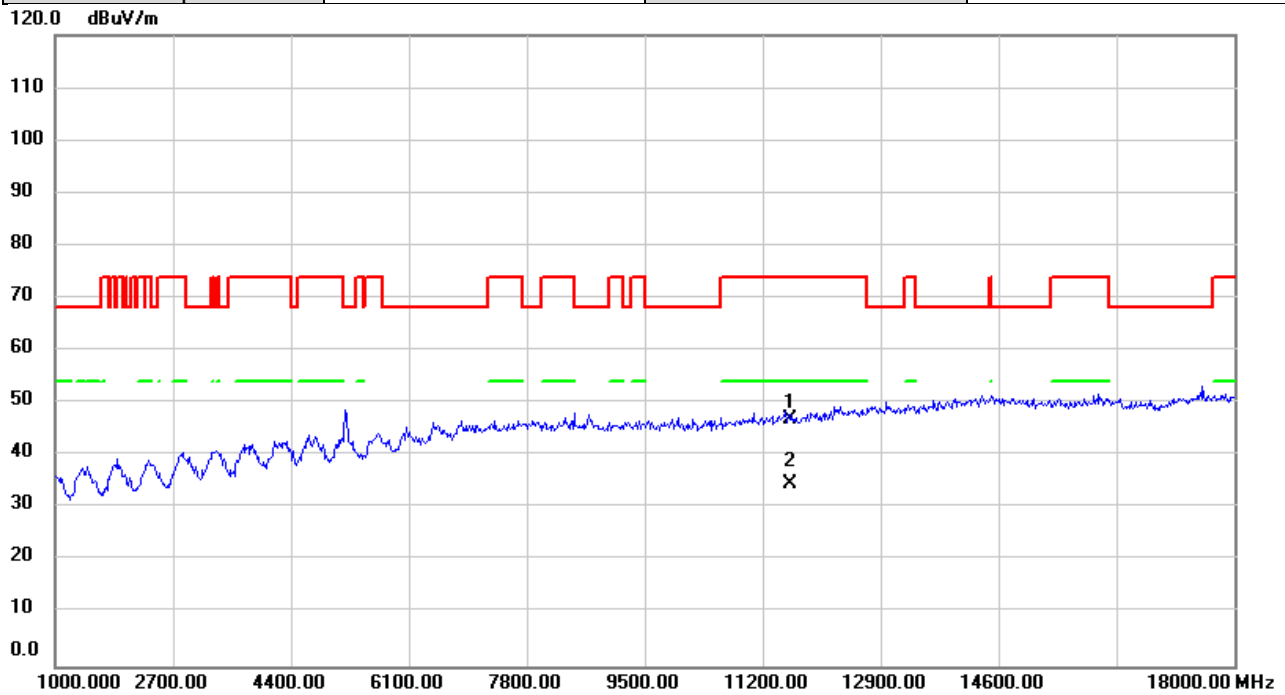


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11590.00	44.17	2.79	46.96	74.00	-27.04	peak	
2	*	11590.00	31.83	2.79	34.62	54.00	-19.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/29
Test Frequency	5210MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

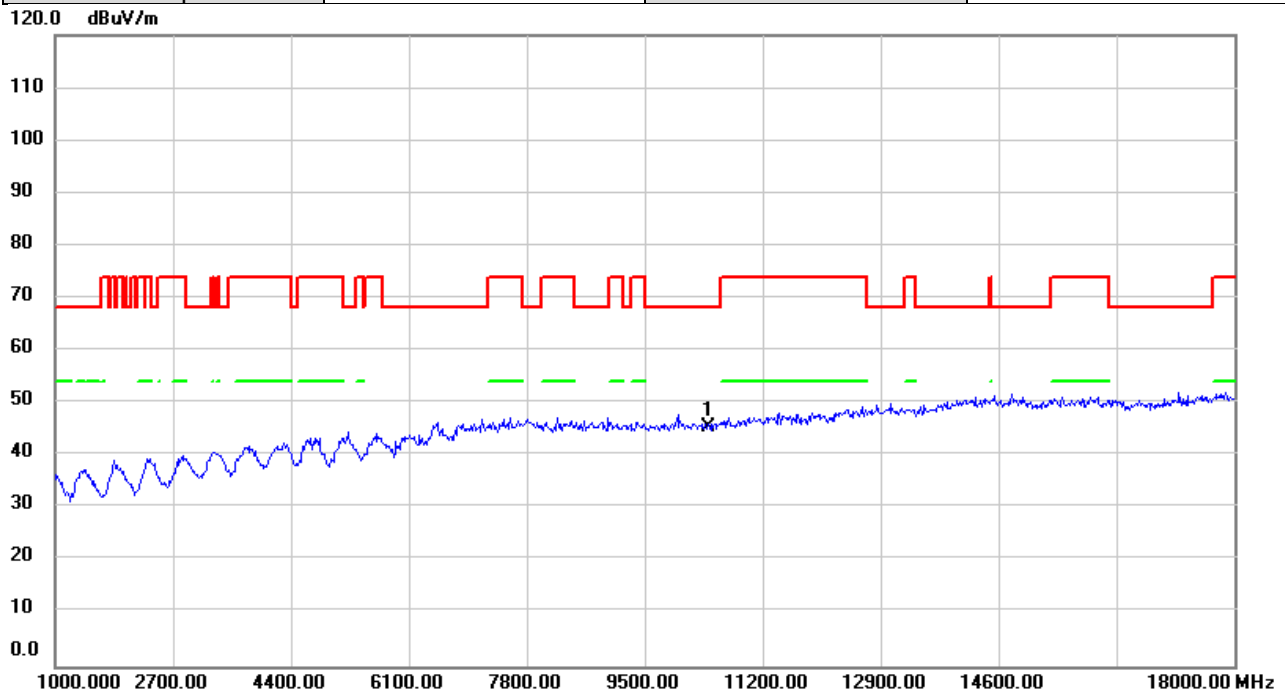


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	42.85	2.53	45.38	68.20	-22.82	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/29
Test Frequency	5210MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

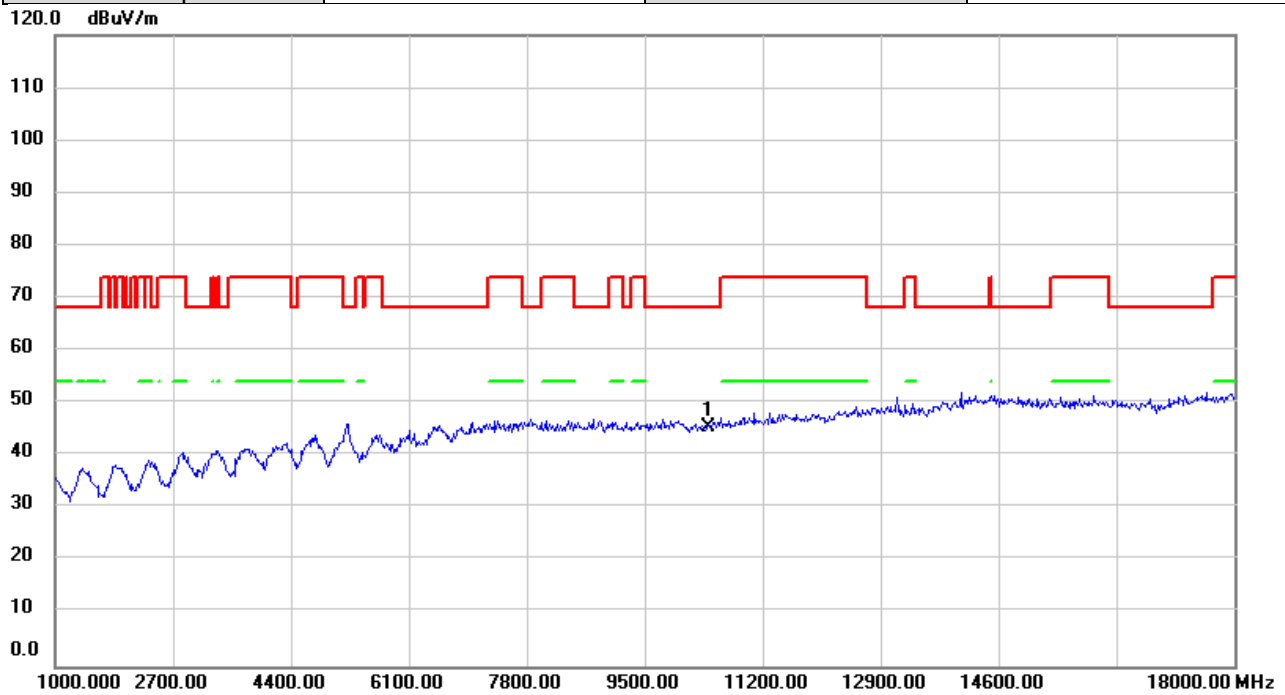


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	42.88	2.53	45.41	68.20	-22.79	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/29
Test Frequency	5290MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

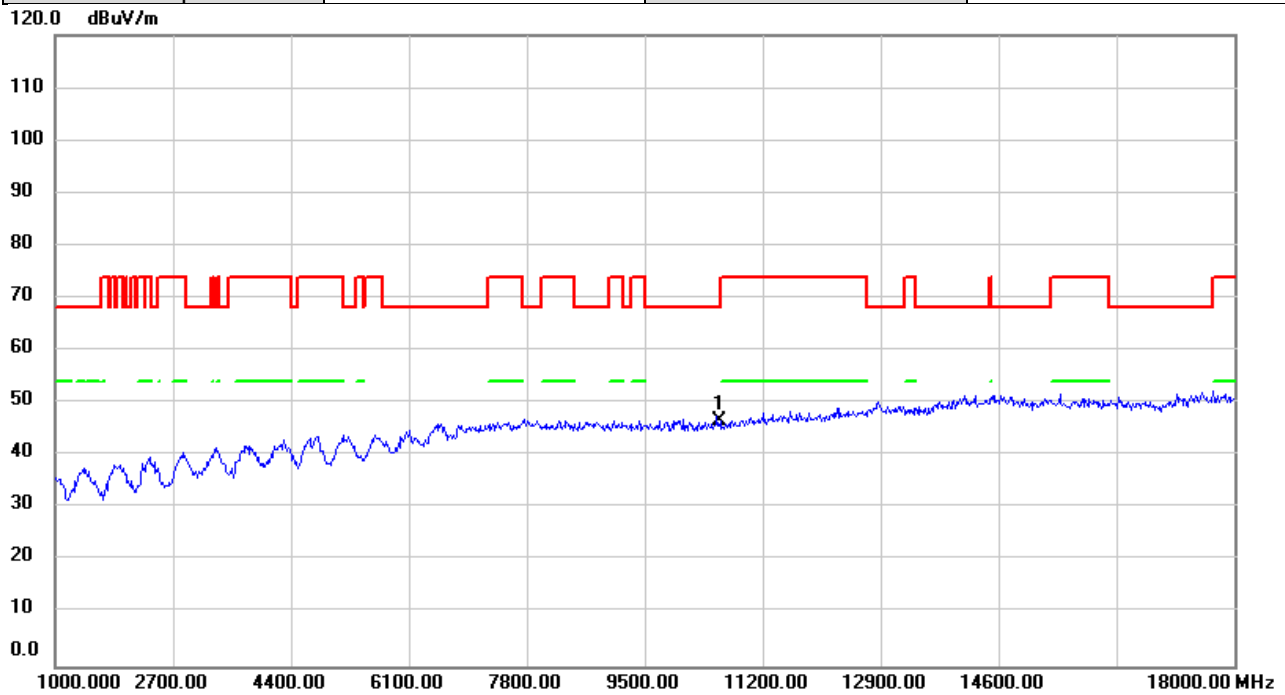


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	44.20	2.50	46.70	68.20	-21.50	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/29
Test Frequency	5290MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

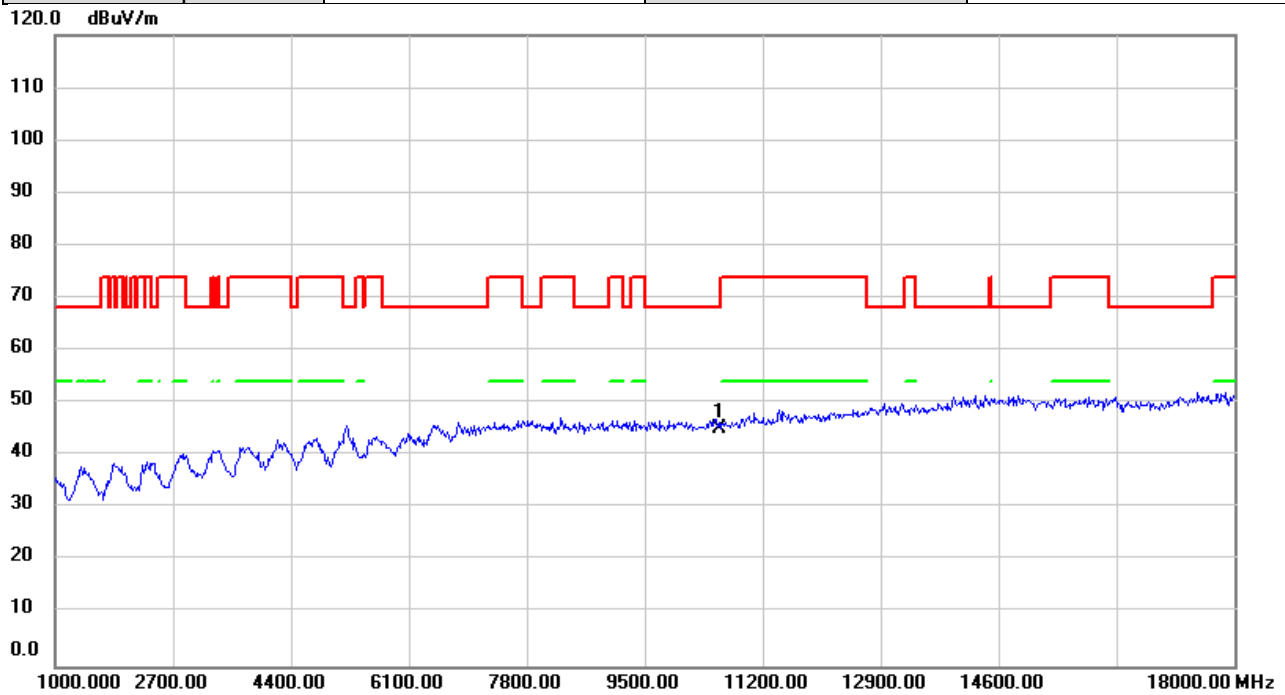


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	42.73	2.50	45.23	68.20	-22.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/29
Test Frequency	5530MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

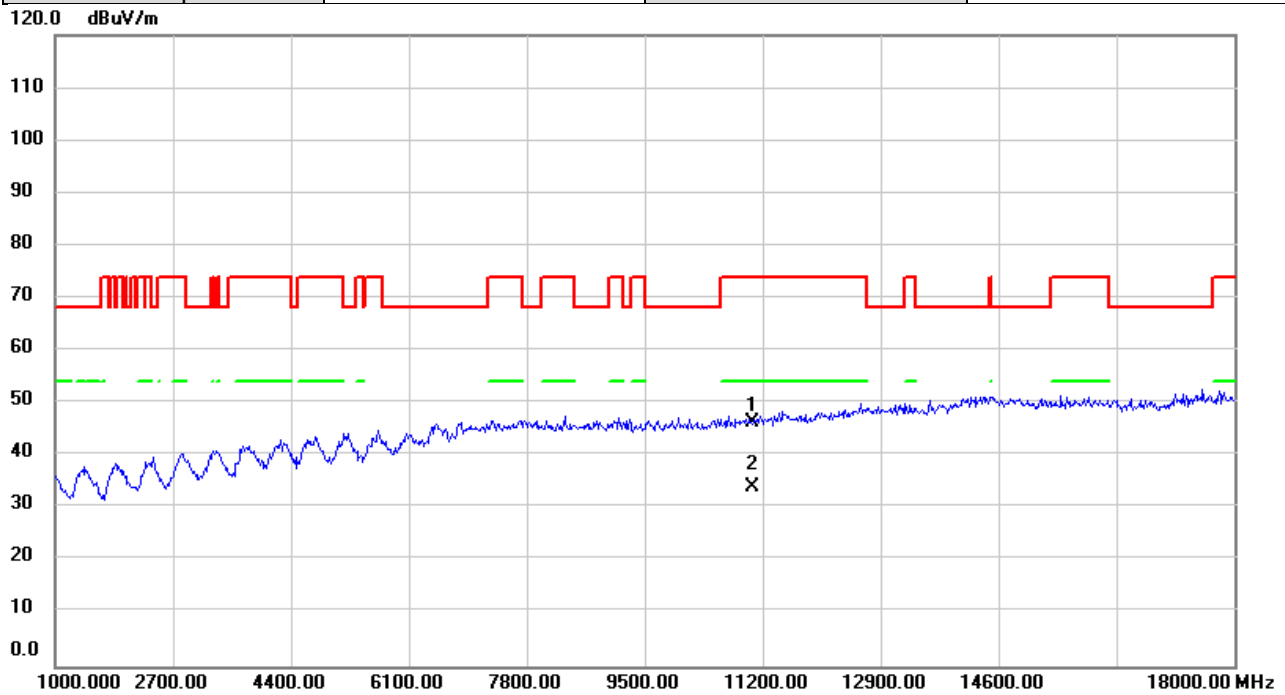


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11060.00	43.54	2.72	46.26	74.00	-27.74	peak	
2	*	11060.00	31.38	2.72	34.10	54.00	-19.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/29
Test Frequency	5530MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

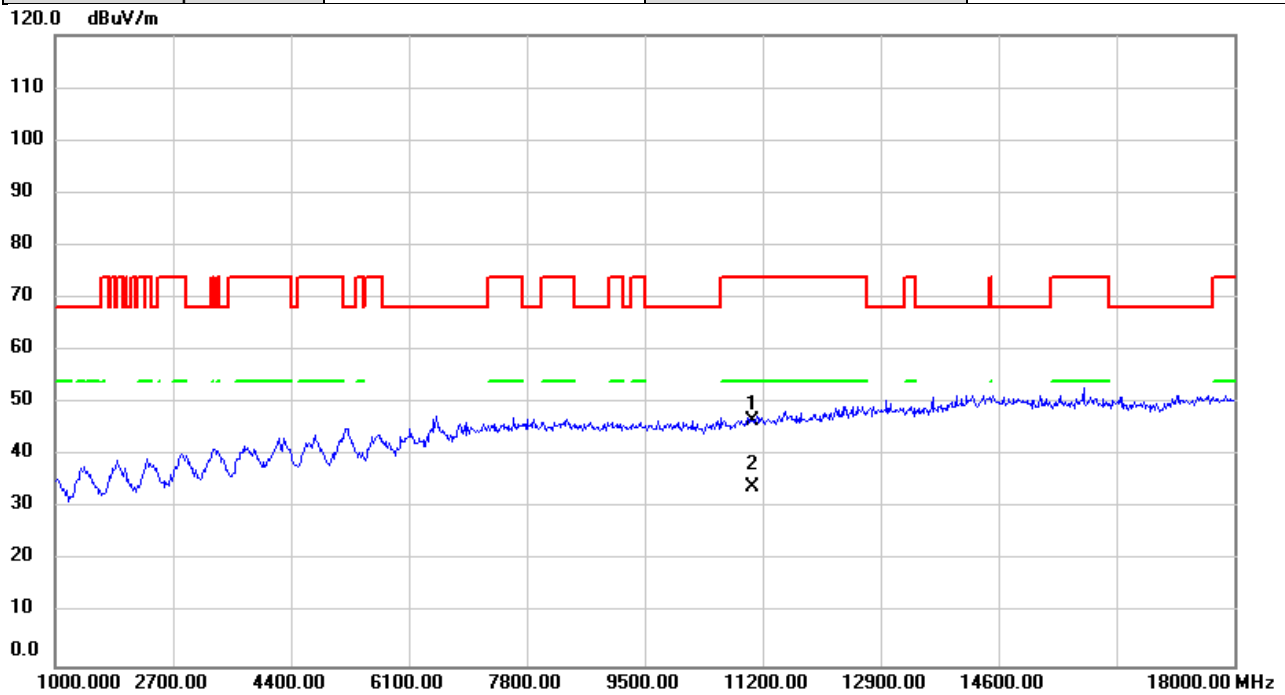


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11060.00	44.01	2.72	46.73	74.00	-27.27	peak	
2	*	11060.00	31.41	2.72	34.13	54.00	-19.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/29
Test Frequency	5610MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

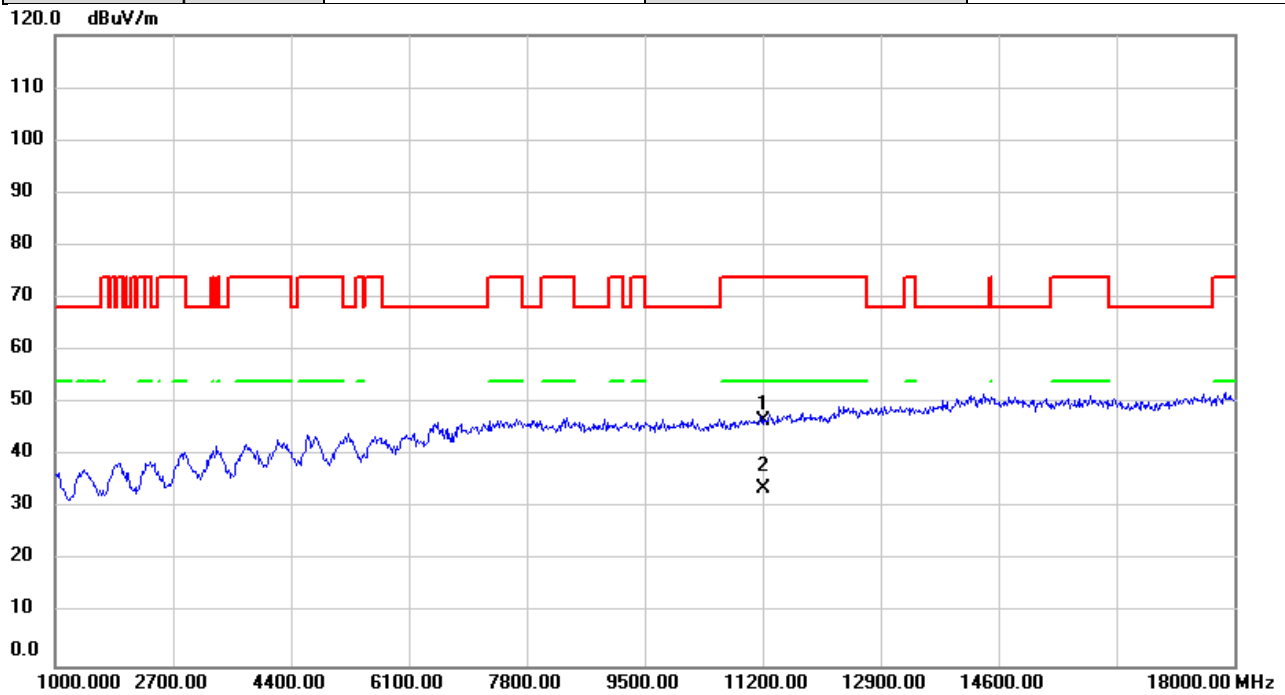


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11220.00	43.92	2.78	46.70	74.00	-27.30	peak	
2	*	11220.00	31.01	2.78	33.79	54.00	-20.21	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/29
Test Frequency	5610MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

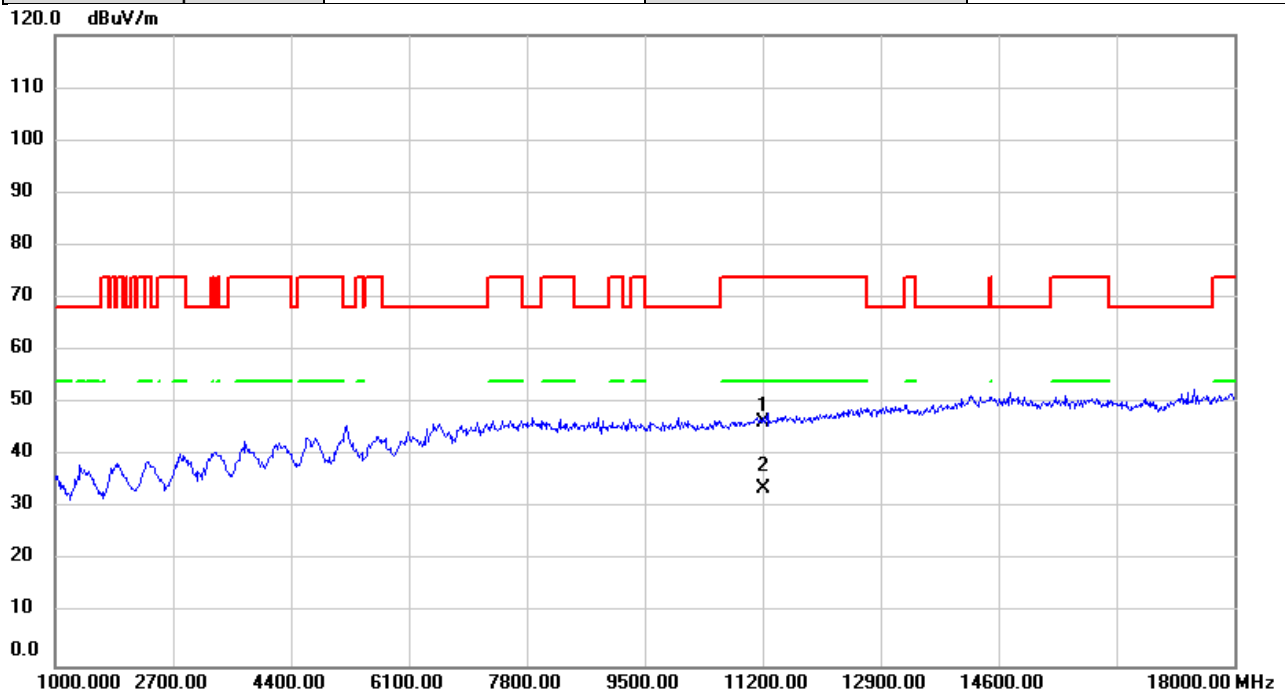


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11220.00	43.71	2.78	46.49	74.00	-27.51	peak	
2	*	11220.00	31.02	2.78	33.80	54.00	-20.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/29
Test Frequency	5690MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

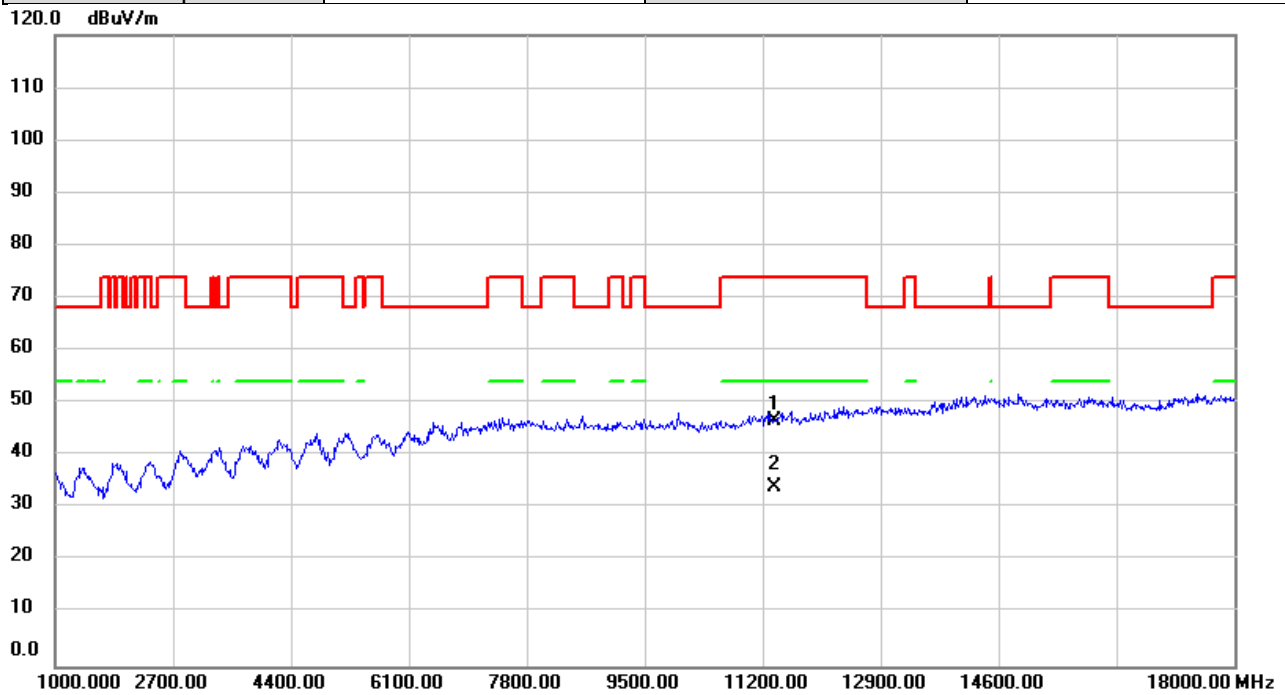


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11380.00	43.71	2.82	46.53	74.00	-27.47	peak	
2	*	11380.00	31.27	2.82	34.09	54.00	-19.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/29
Test Frequency	5690MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

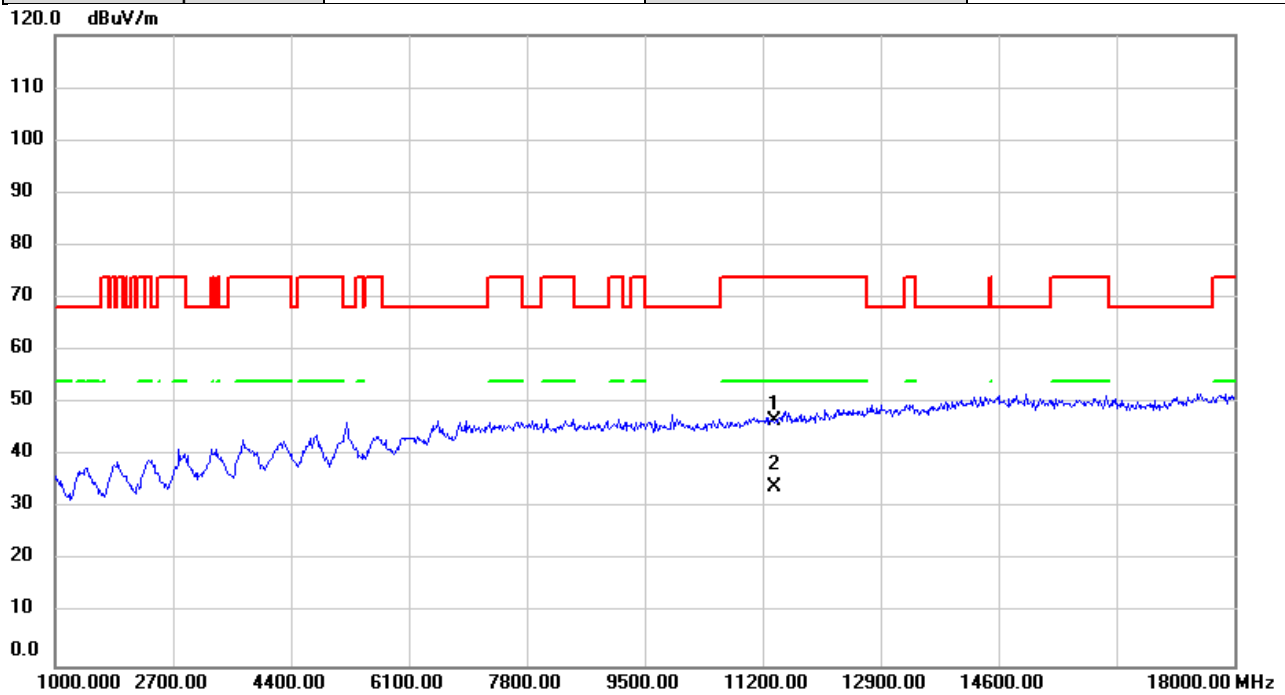


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11380.00	43.92	2.82	46.74	74.00	-27.26	peak	
2	*	11380.00	31.24	2.82	34.06	54.00	-19.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/29
Test Frequency	5775MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

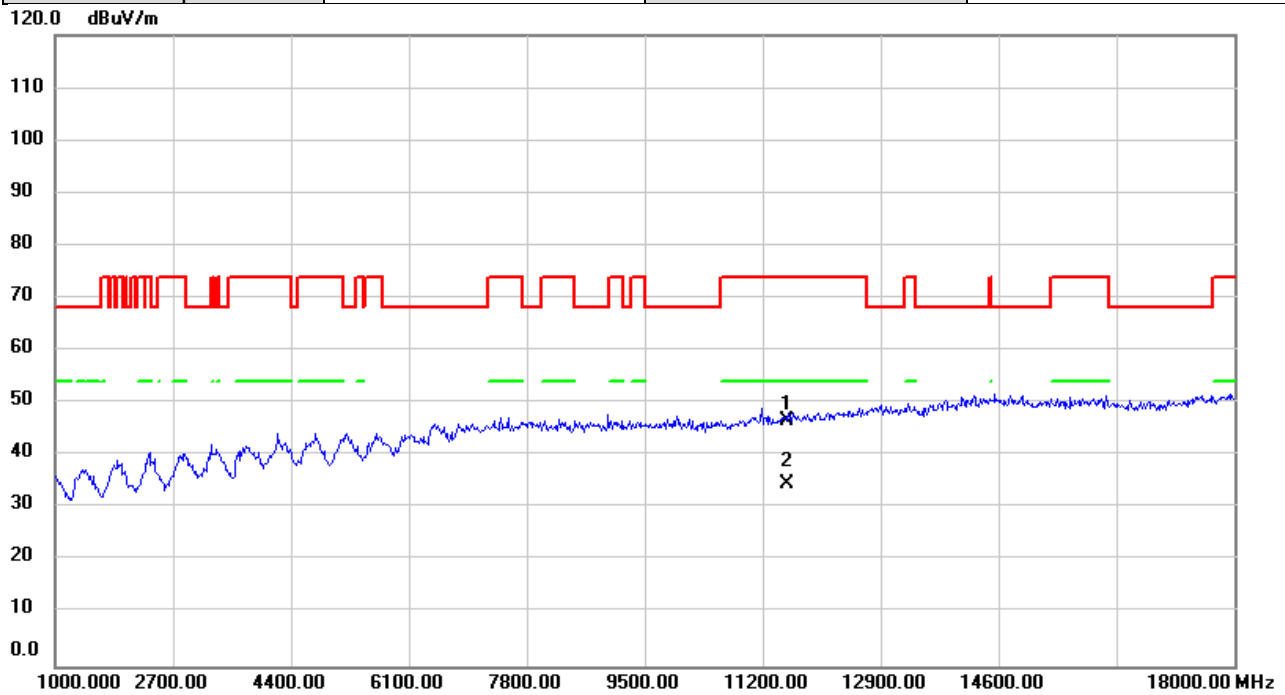


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	43.98	2.82	46.80	74.00	-27.20	peak	
2	*	11550.00	31.76	2.82	34.58	54.00	-19.42	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/12/29
Test Frequency	5775MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

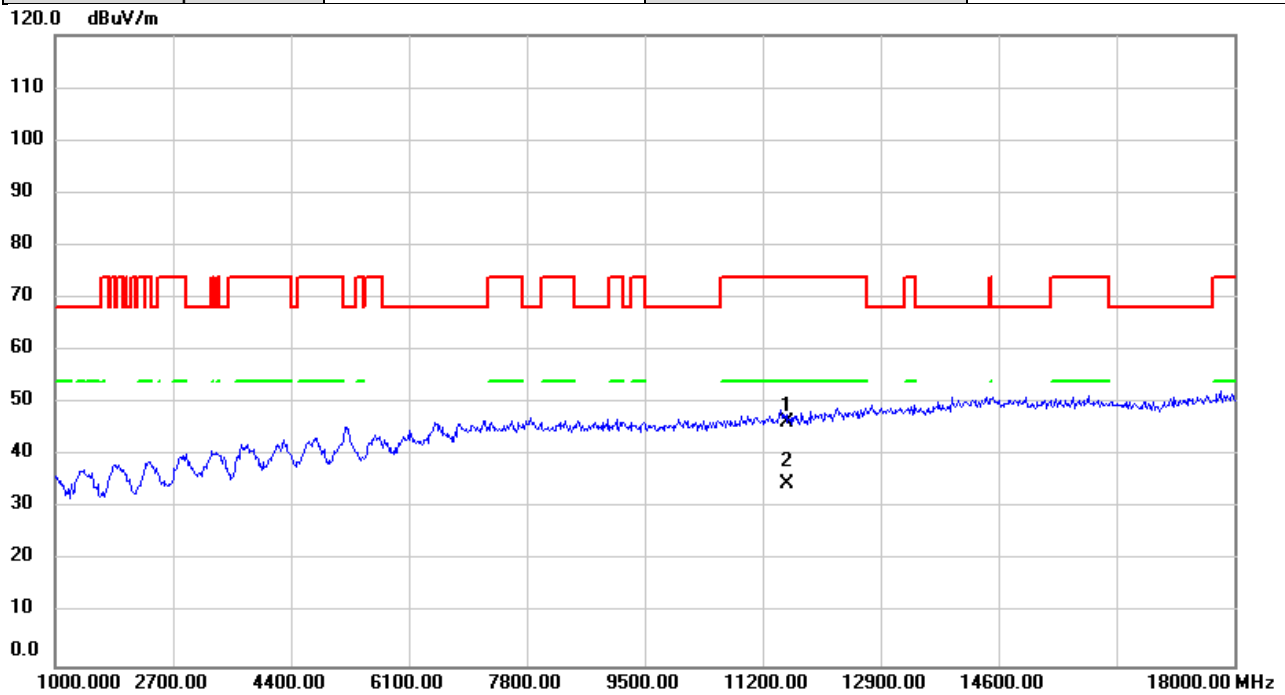


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	43.68	2.82	46.50	74.00	-27.50	peak	
2	*	11550.00	31.78	2.82	34.60	54.00	-19.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2025/12/29
Test Frequency	5250MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

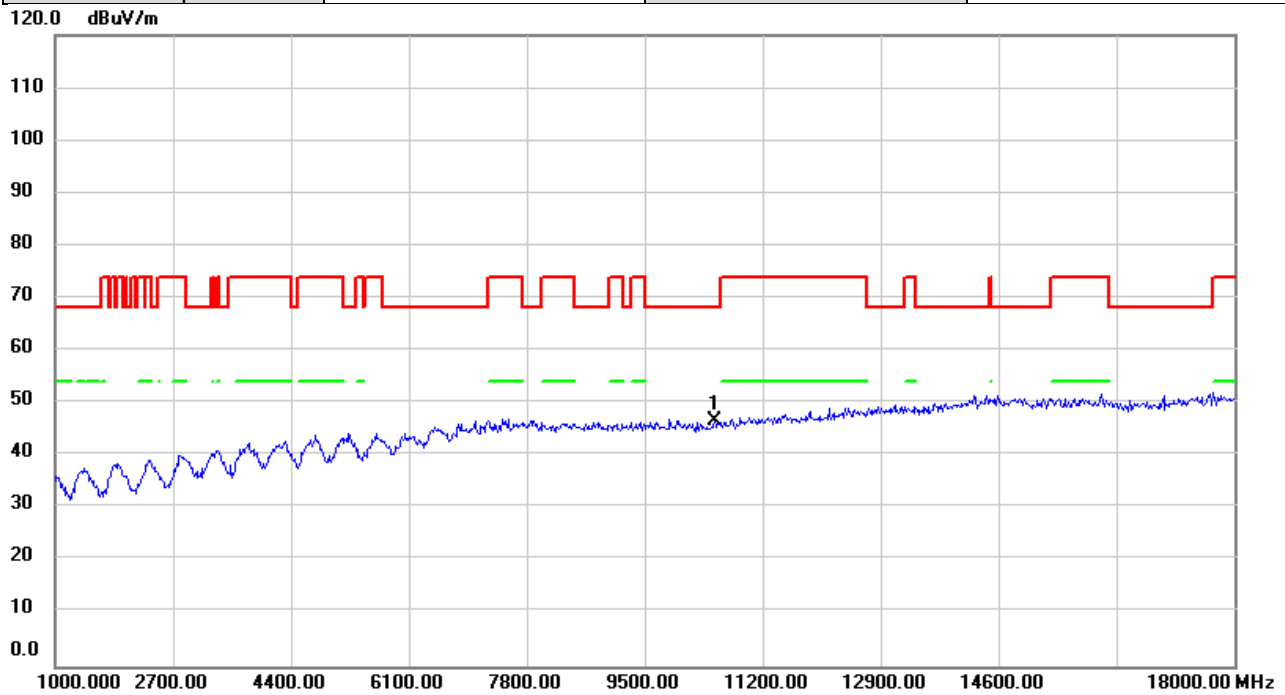


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10500.00	44.23	2.47	46.70	68.20	-21.50	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2025/12/29
Test Frequency	5250MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

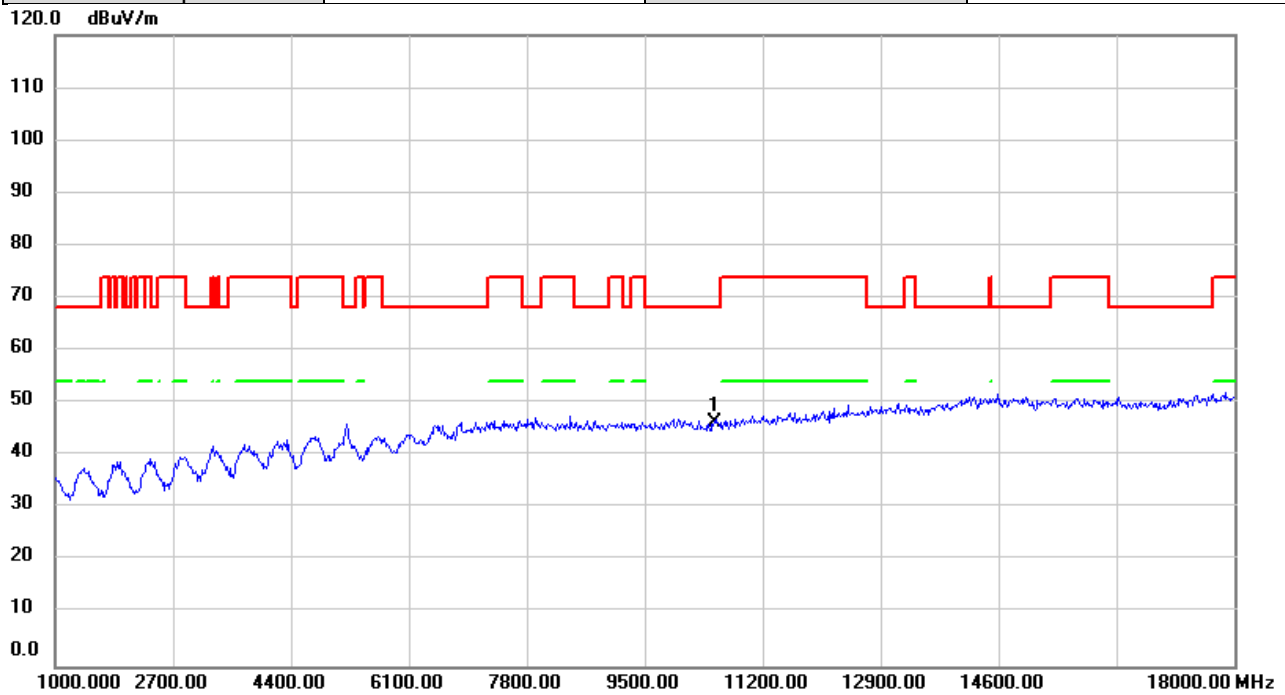


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10500.00	43.90	2.47	46.37	68.20	-21.83	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2025/12/29
Test Frequency	5570MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

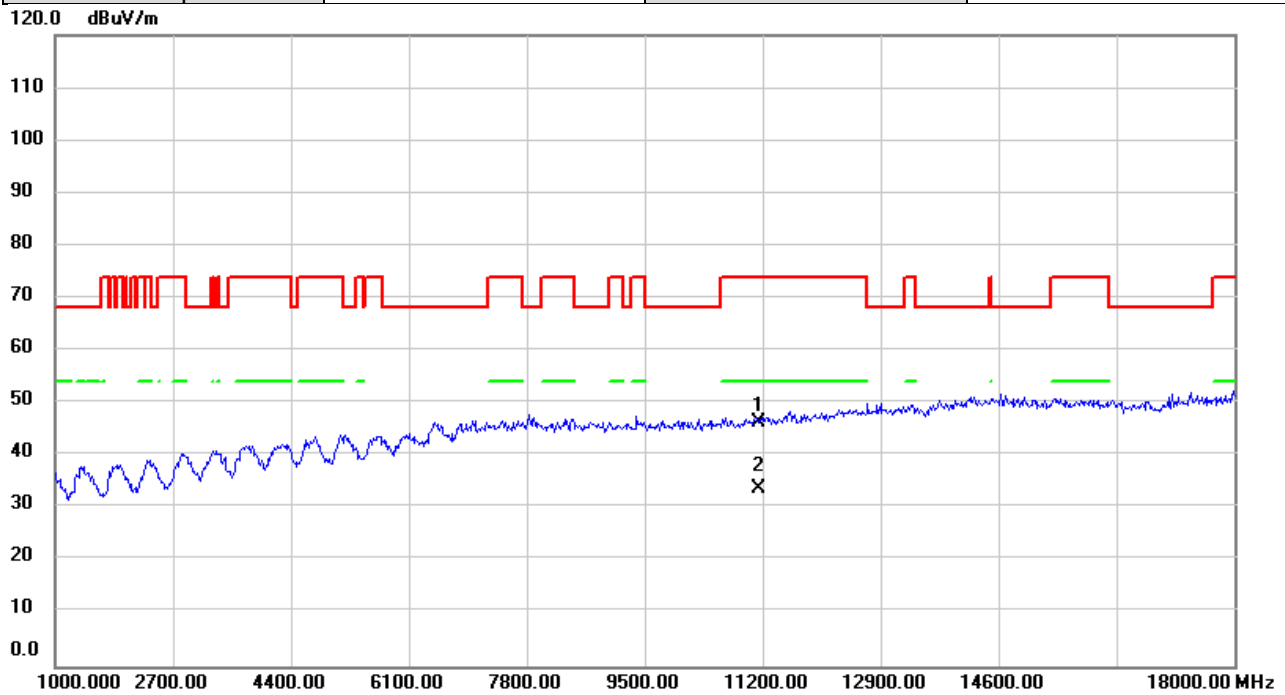


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11140.00	43.72	2.75	46.47	74.00	-27.53	peak	
2	*	11140.00	31.11	2.75	33.86	54.00	-20.14	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2025/12/29
Test Frequency	5570MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

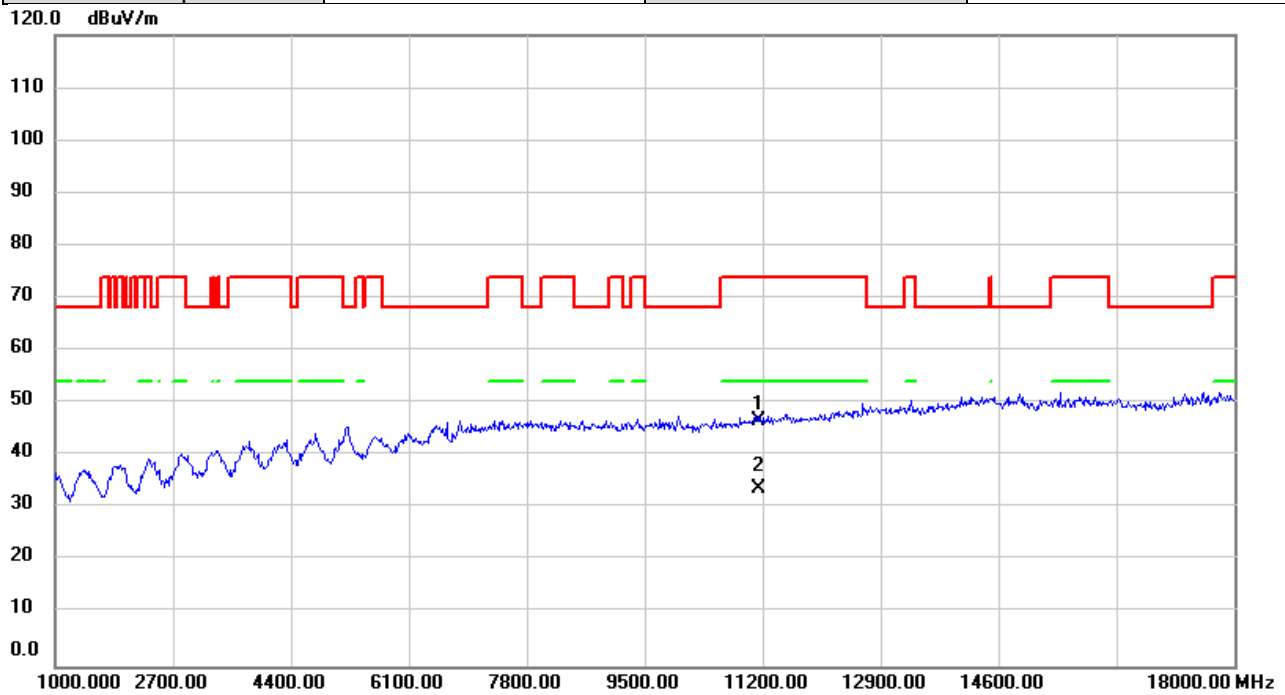


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11140.00	43.82	2.75	46.57	74.00	-27.43	peak	
2	*	11140.00	31.13	2.75	33.88	54.00	-20.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/29
Test Frequency	5180MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

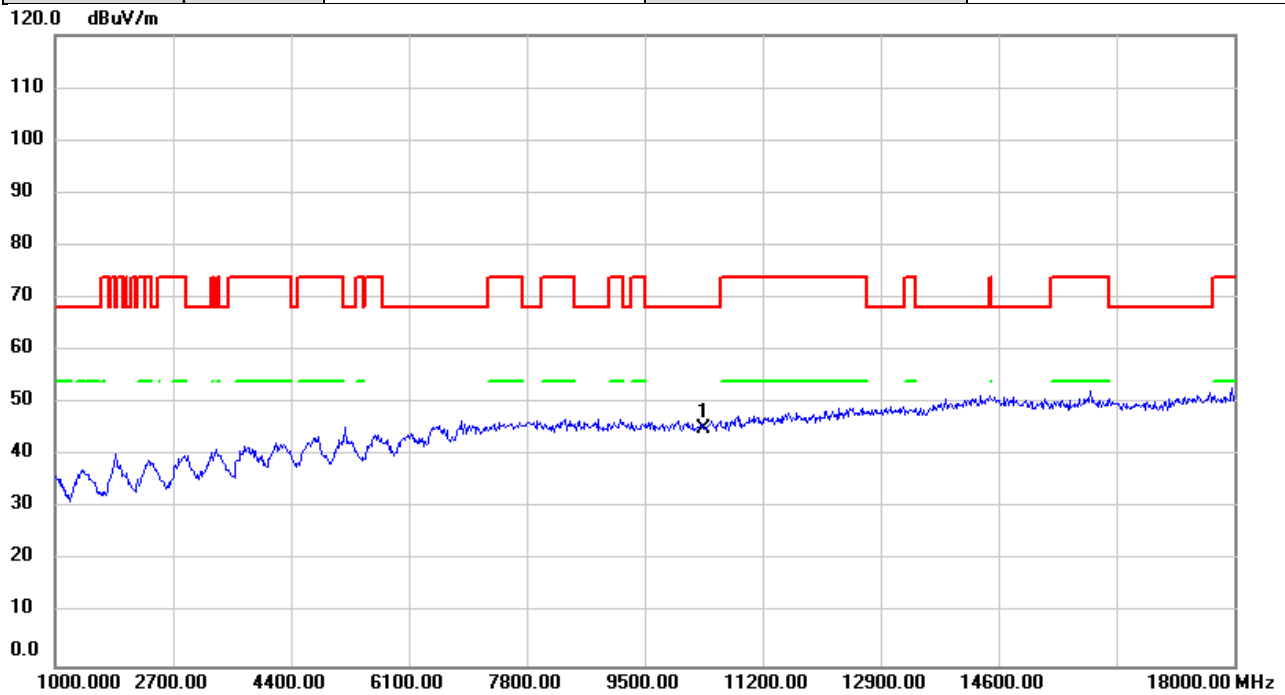


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	42.52	2.57	45.09	68.20	-23.11	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/29
Test Frequency	5180MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

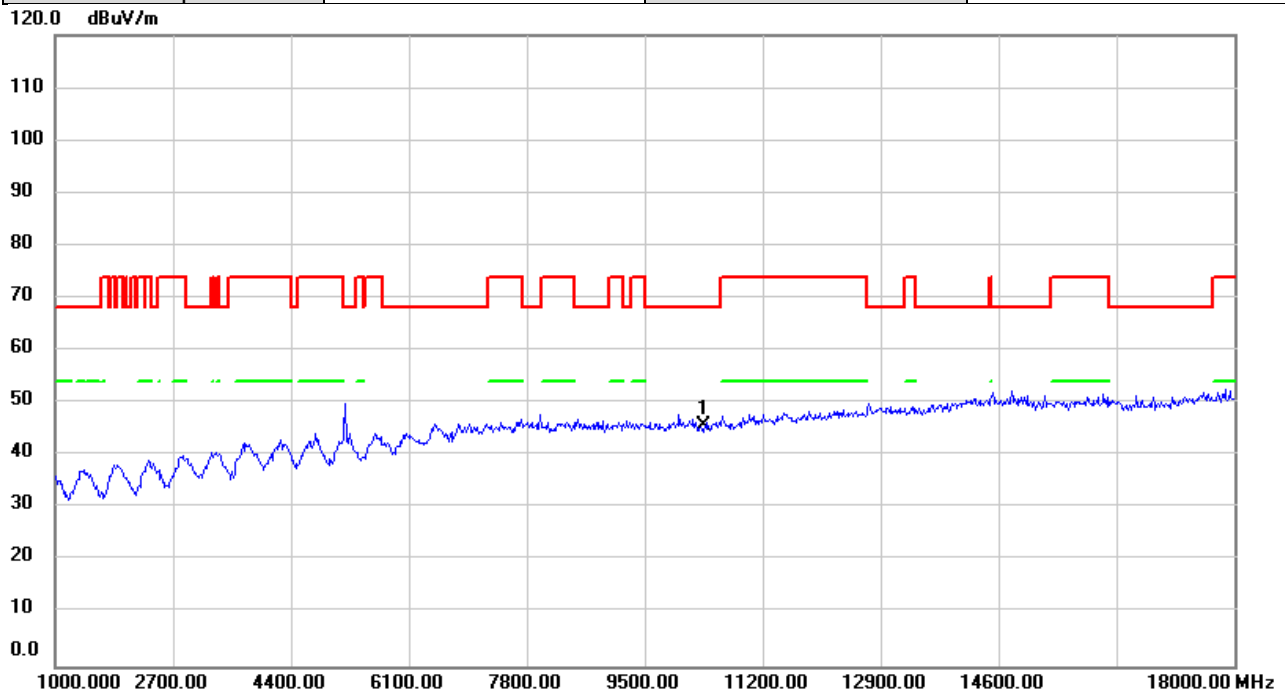


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	43.22	2.57	45.79	68.20	-22.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/29
Test Frequency	5200MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

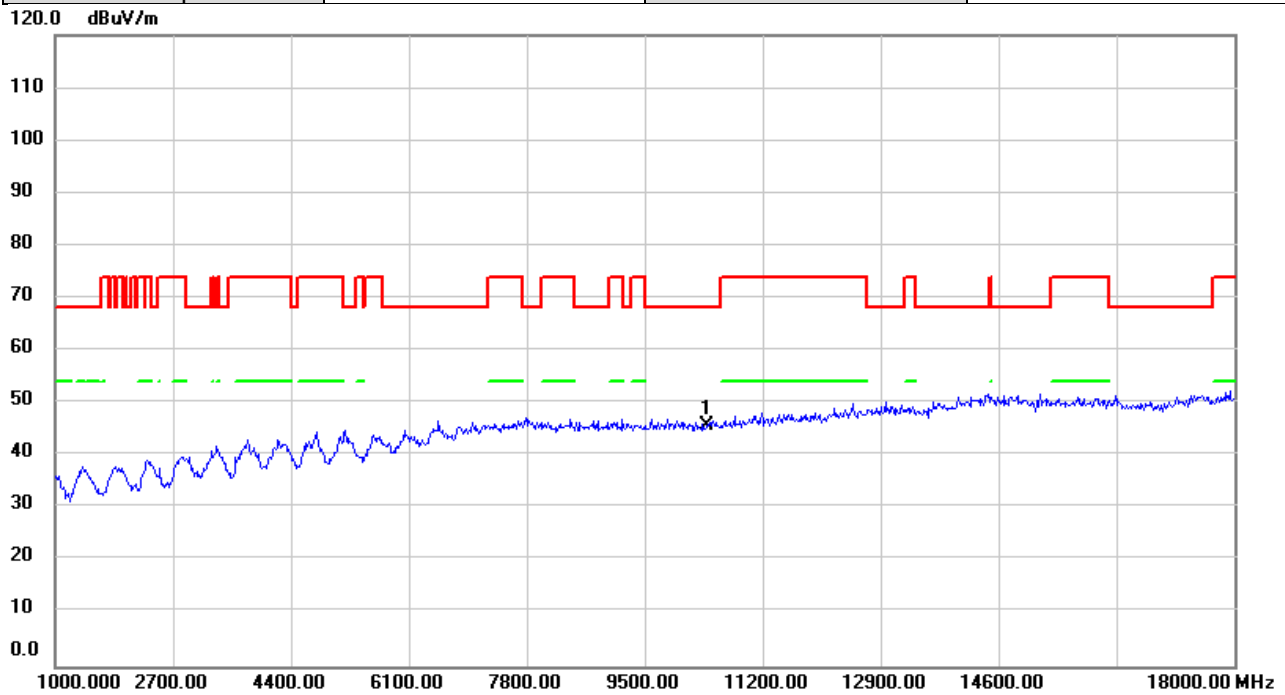


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	43.13	2.54	45.67	68.20	-22.53	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/29
Test Frequency	5200MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

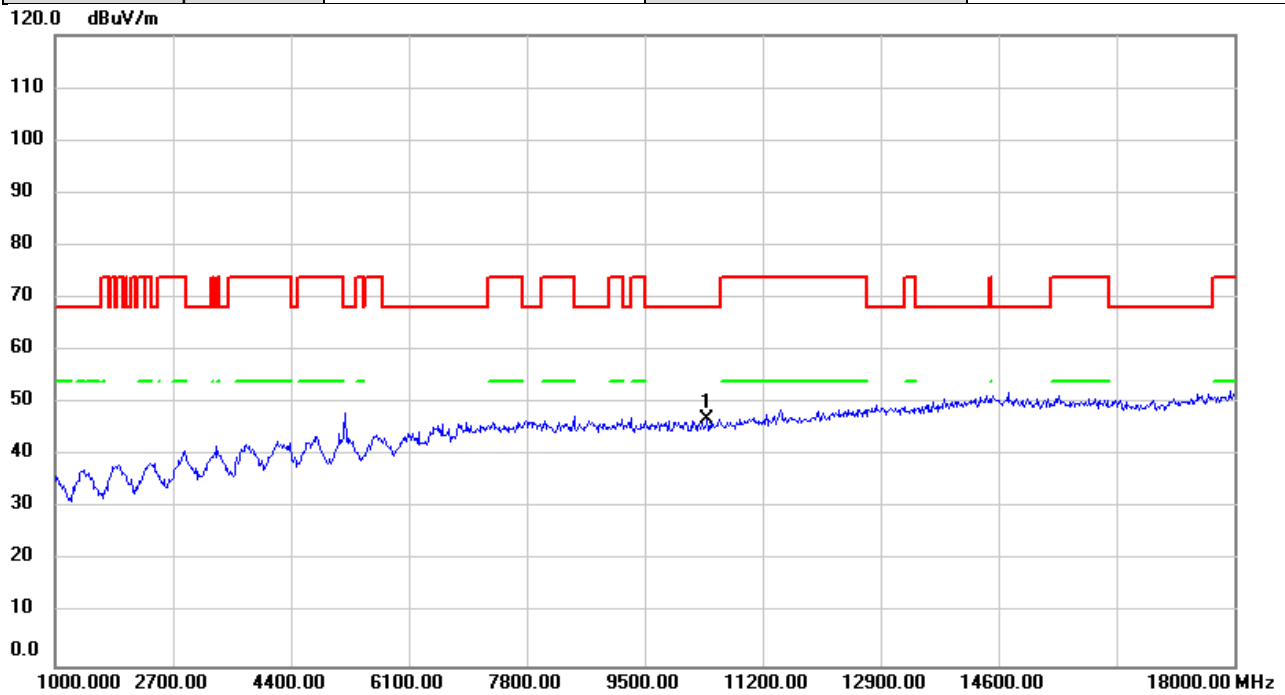


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	44.38	2.54	46.92	68.20	-21.28	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/29
Test Frequency	5240MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

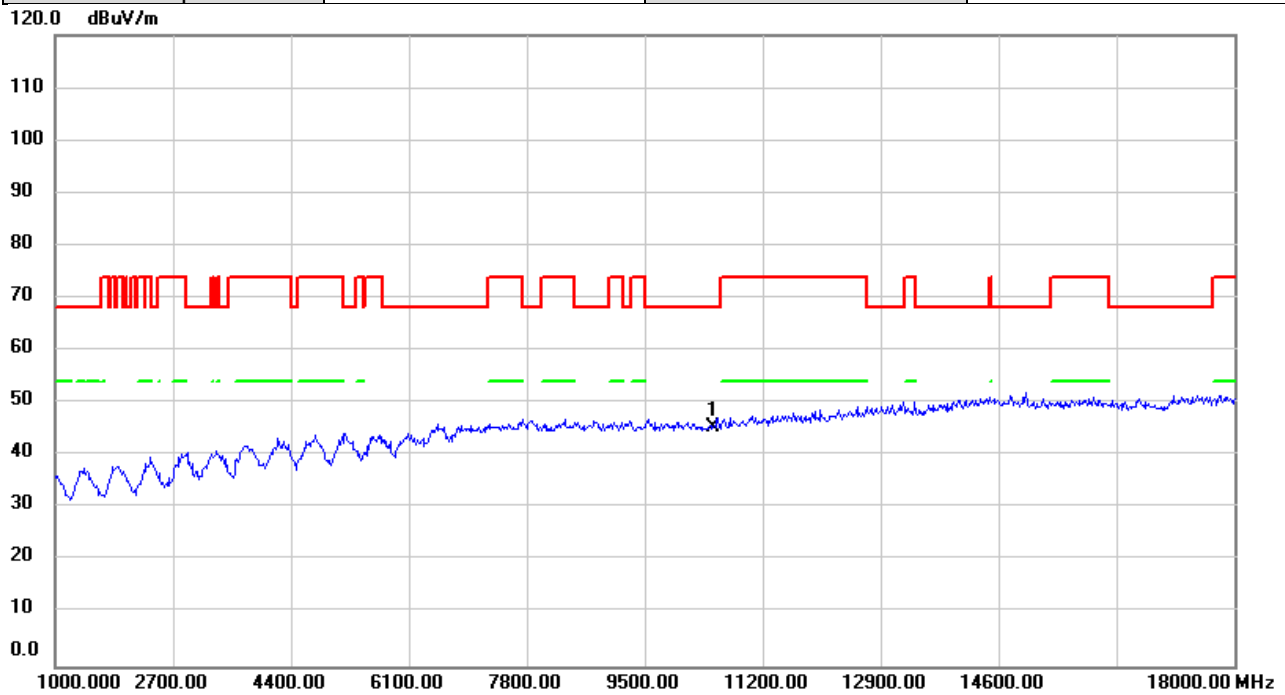


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	42.98	2.48	45.46	68.20	-22.74	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/29
Test Frequency	5240MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

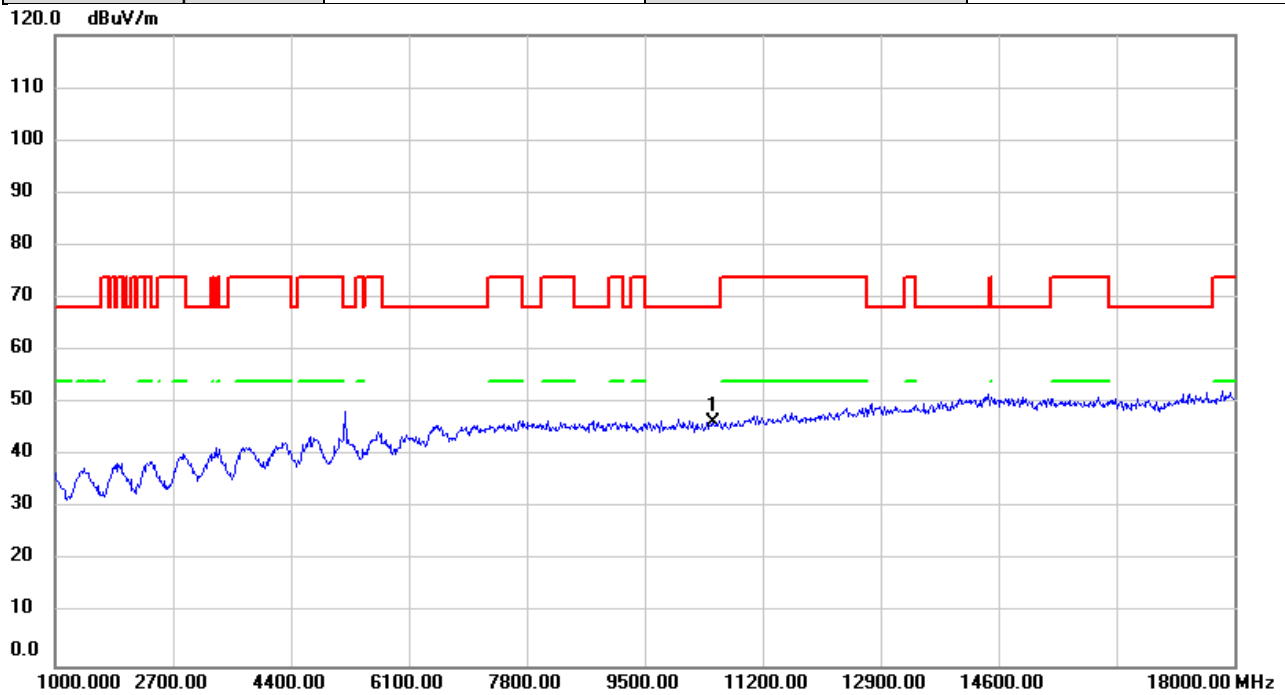


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	43.99	2.48	46.47	68.20	-21.73	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/29
Test Frequency	5260MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

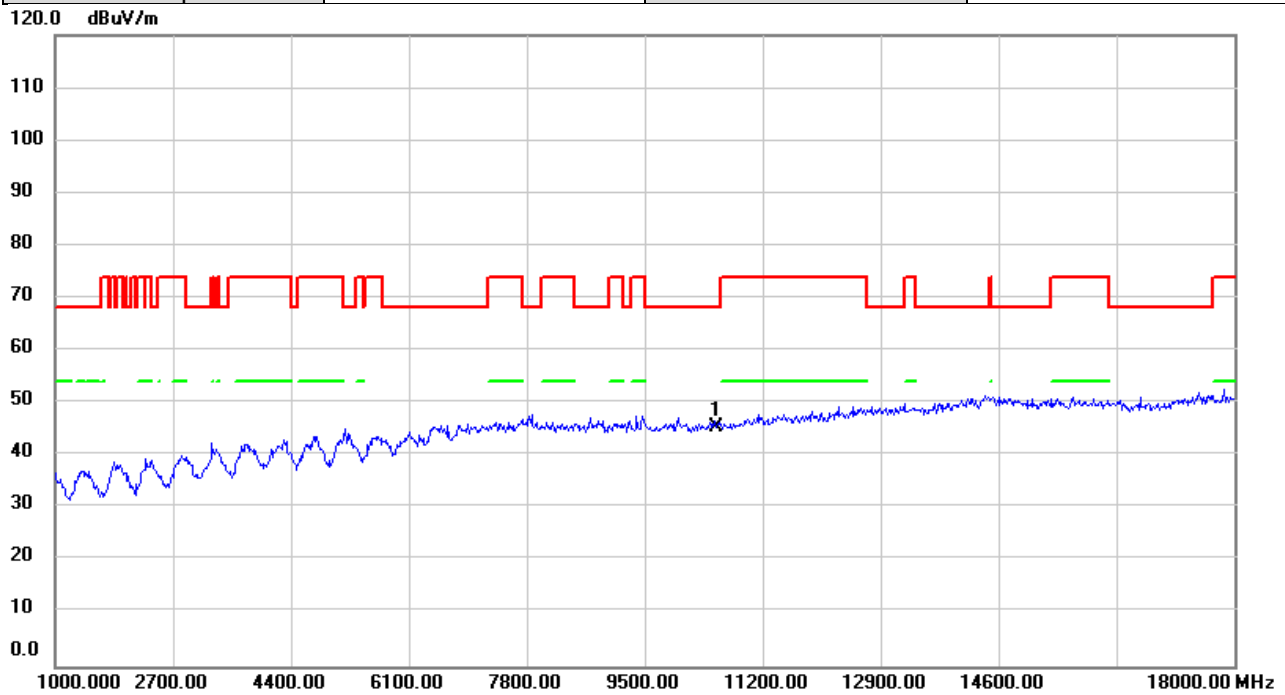


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	43.02	2.48	45.50	68.20	-22.70	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/29
Test Frequency	5260MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

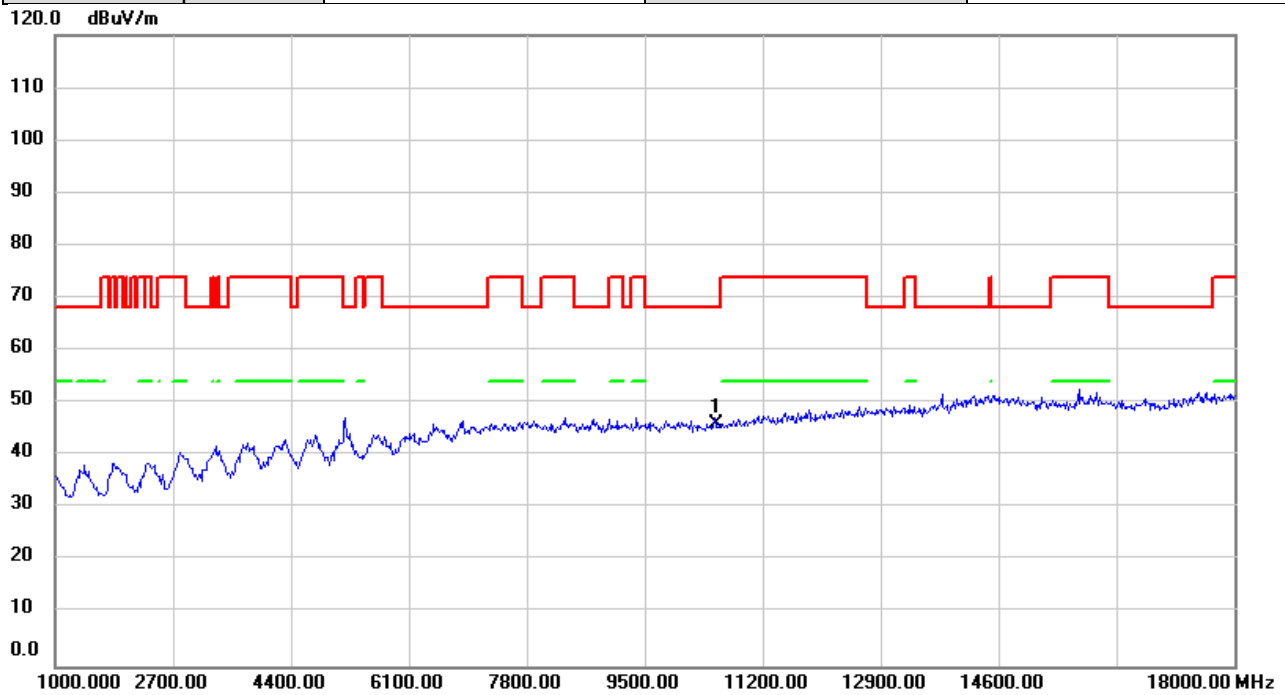


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	43.48	2.48	45.96	68.20	-22.24	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/29
Test Frequency	5280MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

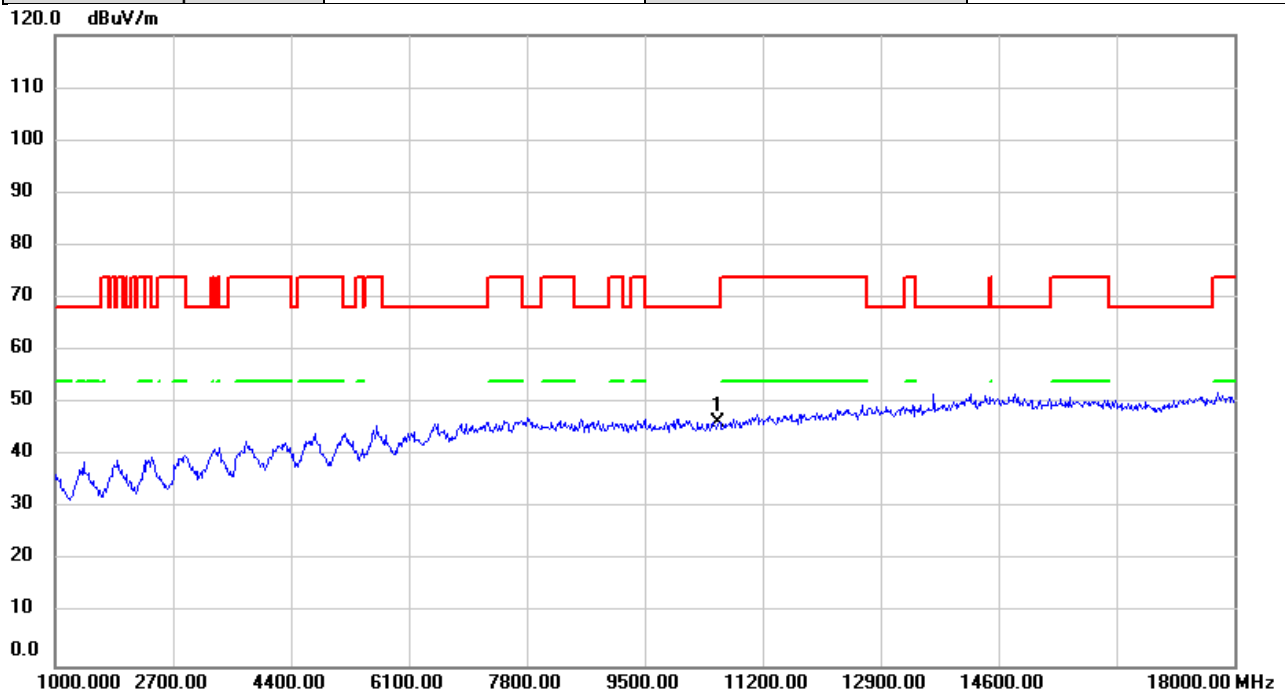


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10560.00	43.76	2.50	46.26	68.20	-21.94	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/29
Test Frequency	5280MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

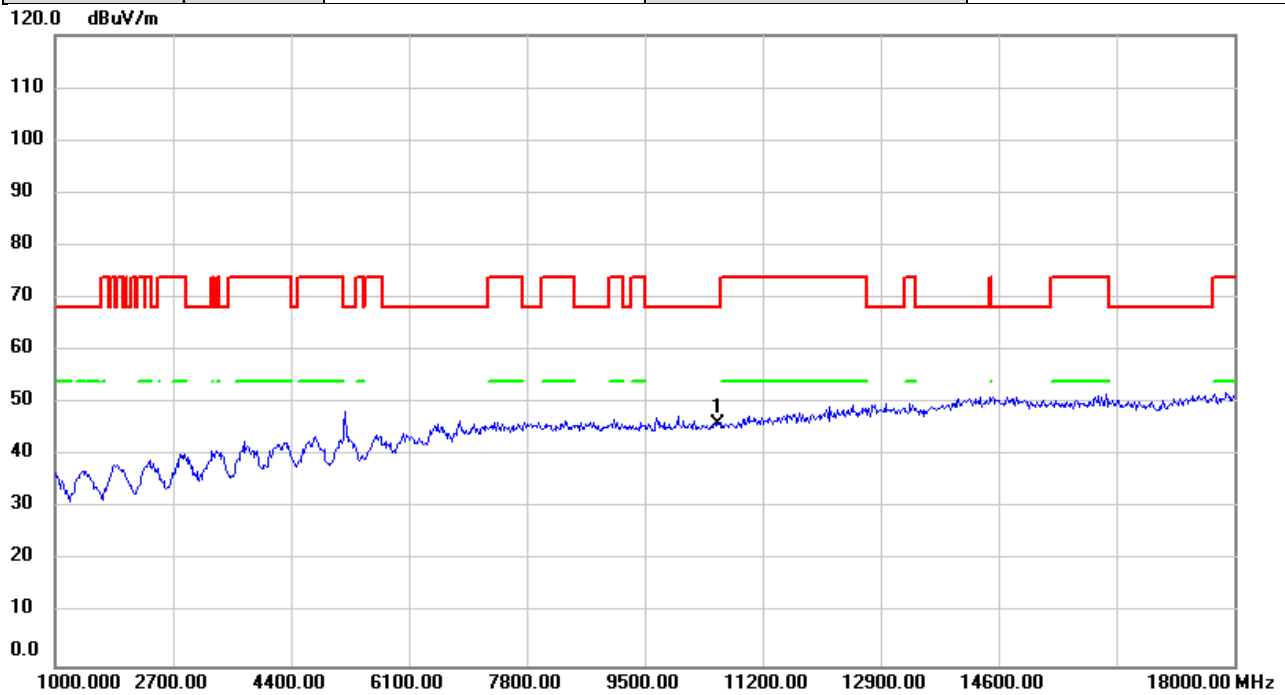


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10560.00	43.63	2.50	46.13	68.20	-22.07	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/29
Test Frequency	5320MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

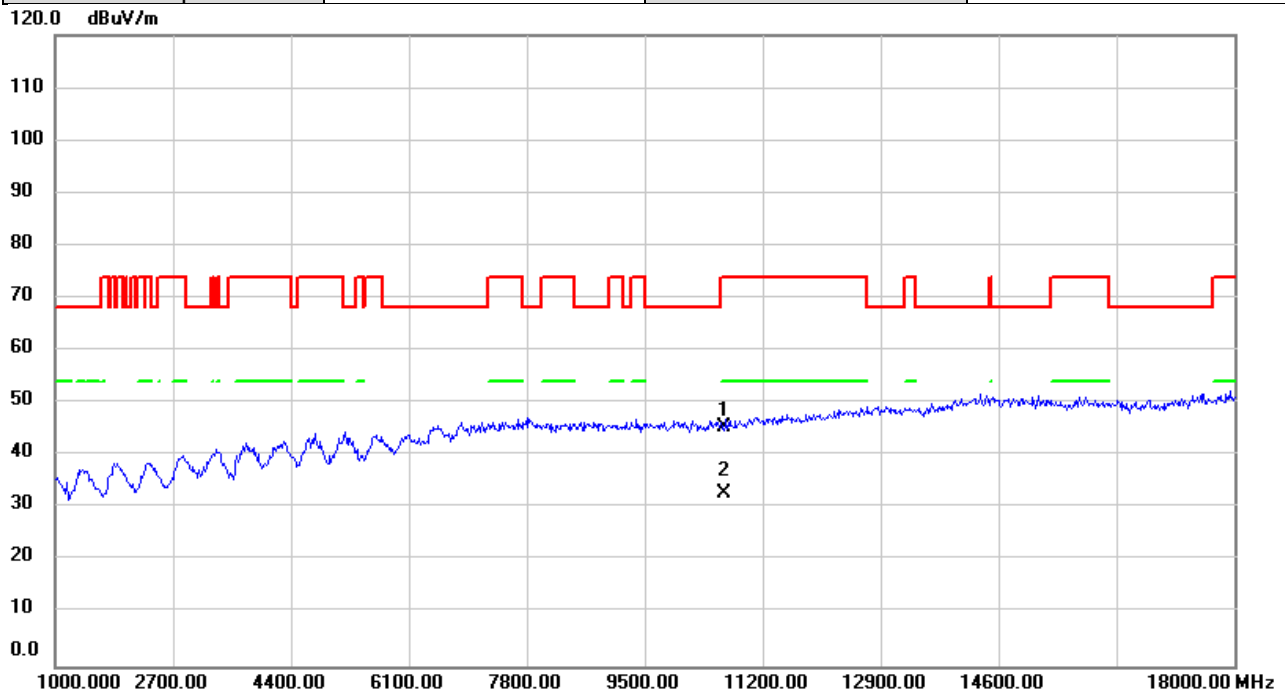


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	42.97	2.54	45.51	74.00	-28.49	peak	
2	*	10640.00	30.38	2.54	32.92	54.00	-21.08	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/29
Test Frequency	5320MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

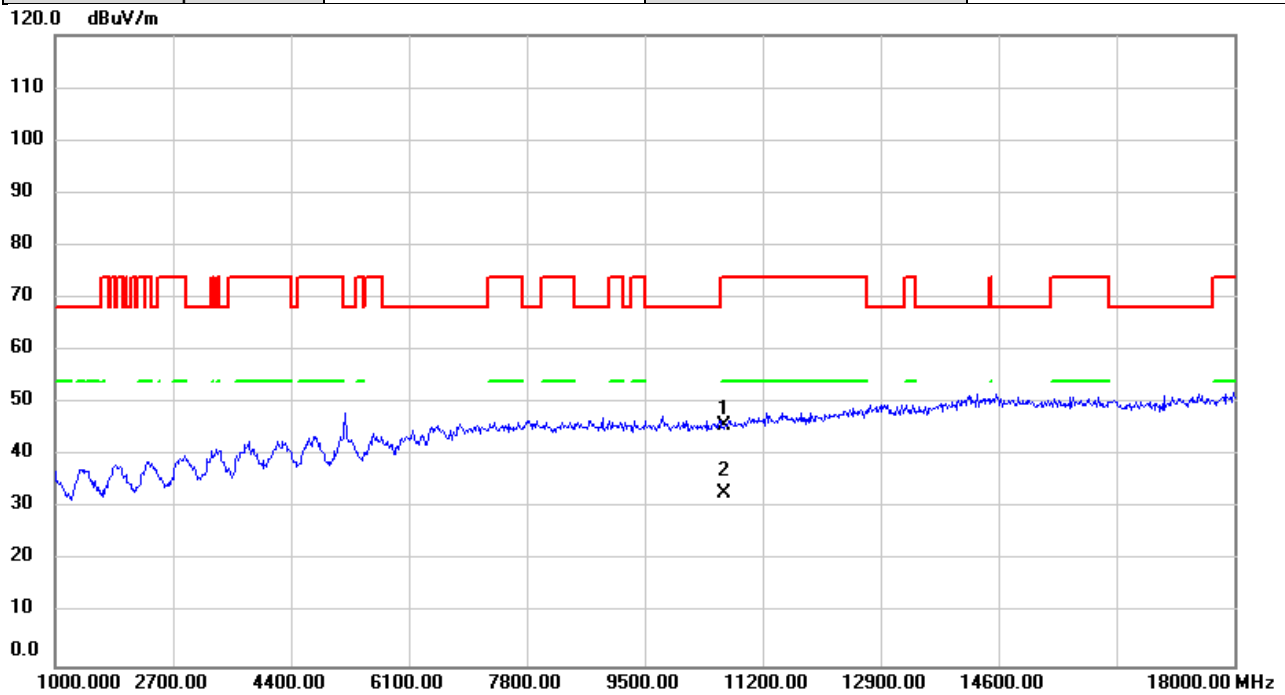


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10640.00	43.18	2.54	45.72	74.00	-28.28	peak	
2	*	10640.00	30.40	2.54	32.94	54.00	-21.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/29
Test Frequency	5500MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

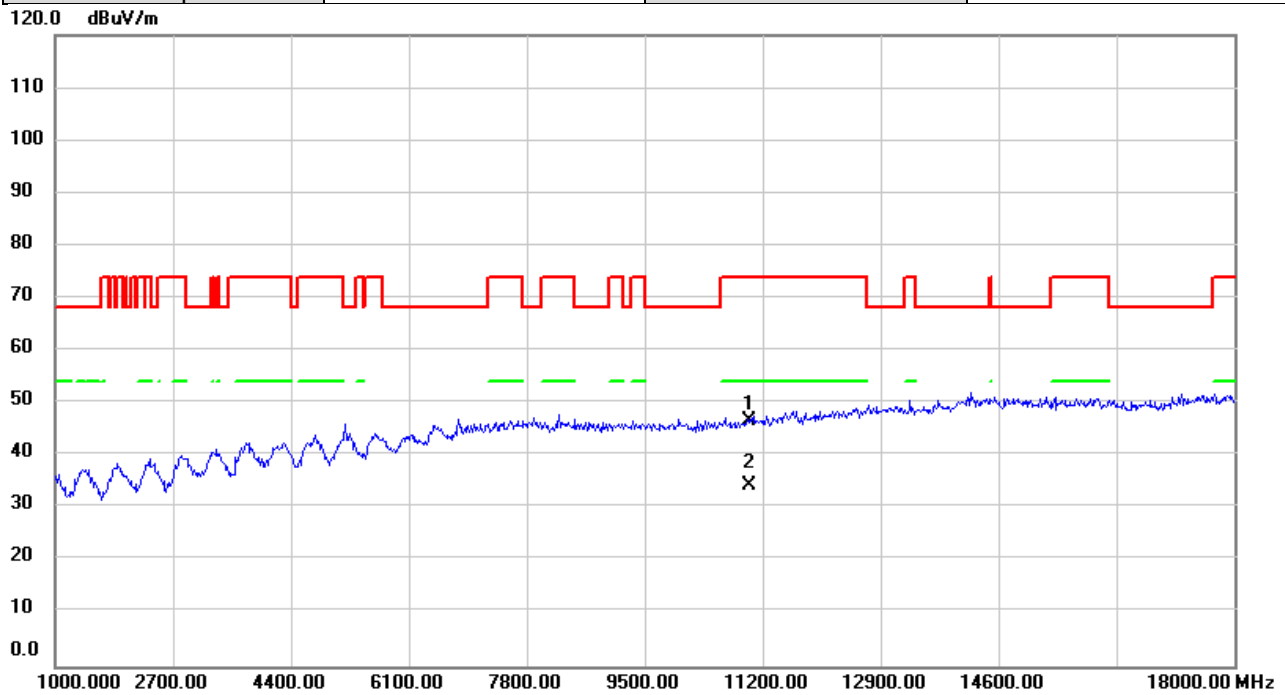


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11000.00	43.99	2.71	46.70	74.00	-27.30	peak	
2	*	11000.00	31.49	2.71	34.20	54.00	-19.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/29
Test Frequency	5500MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

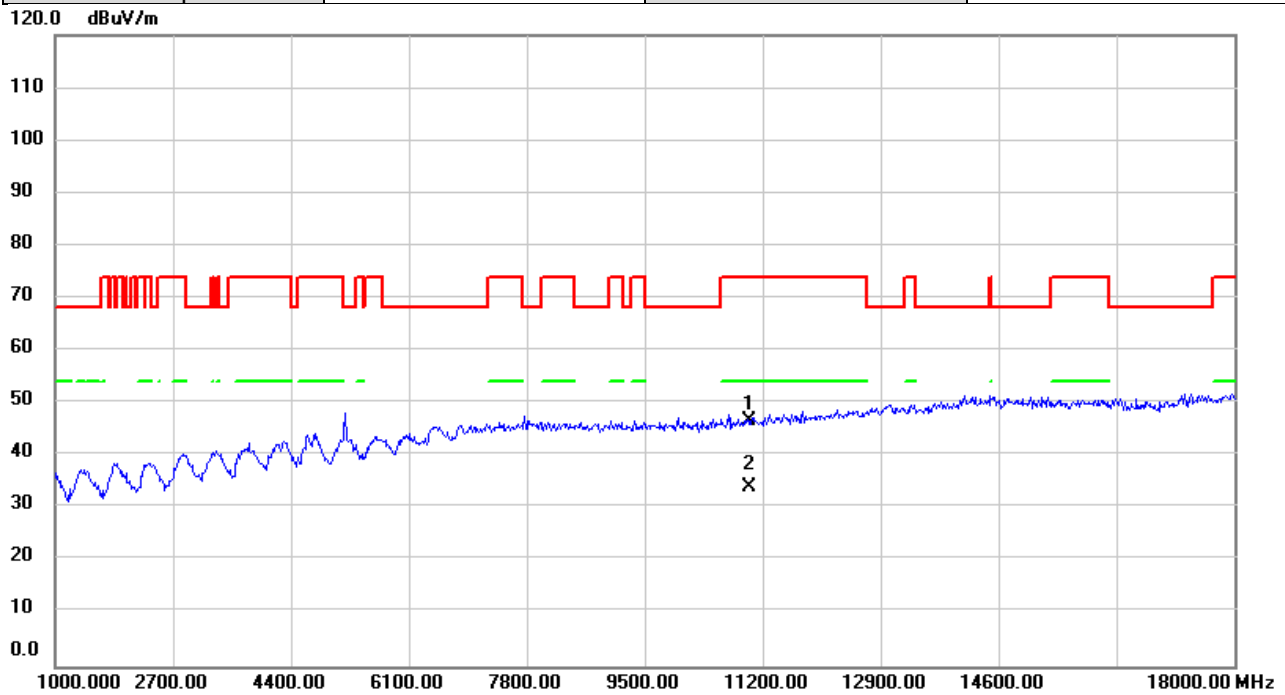


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	43.87	2.71	46.58	74.00	-27.42	peak	
2	*	11000.00	31.42	2.71	34.13	54.00	-19.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/29
Test Frequency	5600MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

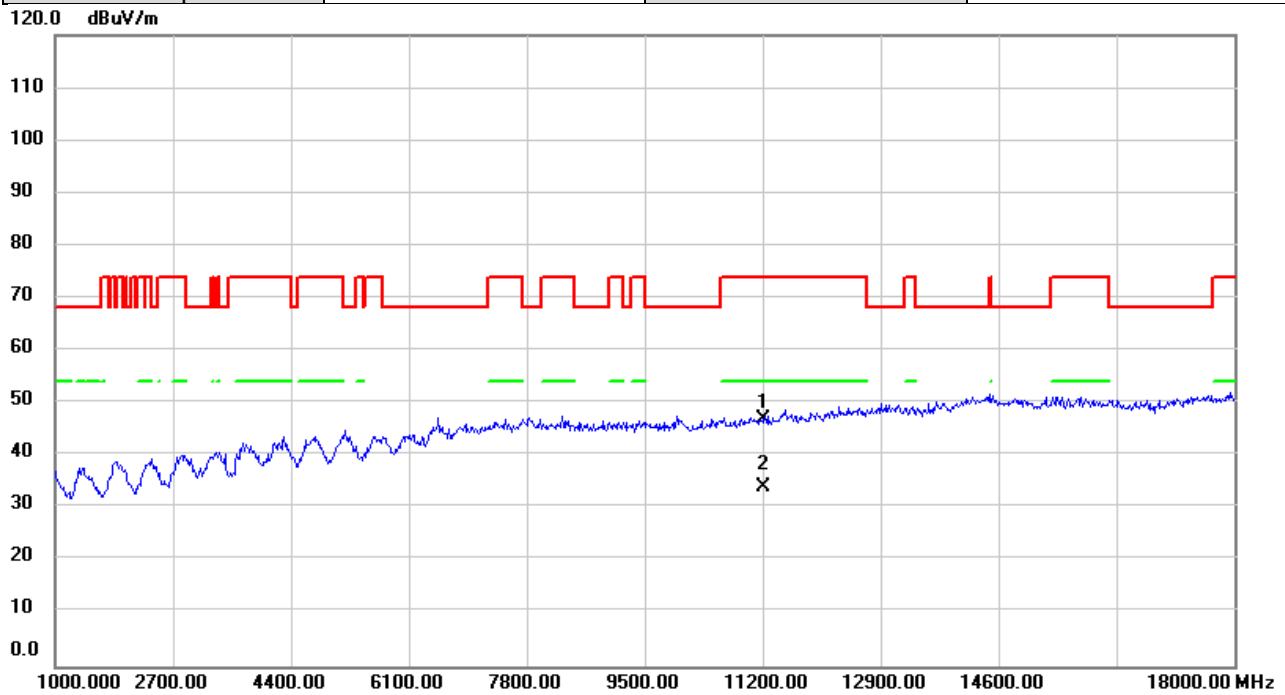


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11200.00	44.25	2.77	47.02	74.00	-26.98	peak	
2	*	11200.00	31.23	2.77	34.00	54.00	-20.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/29
Test Frequency	5600MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

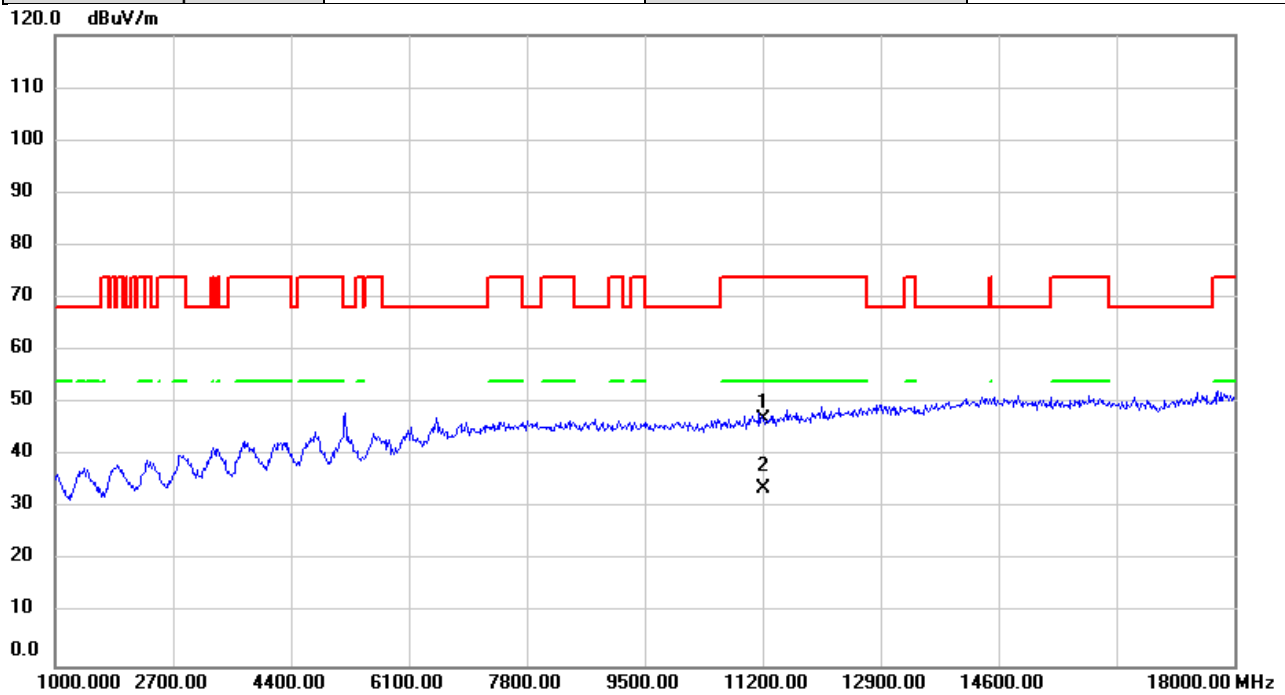


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11200.00	44.18	2.77	46.95	74.00	-27.05	peak	
2	*	11200.00	31.11	2.77	33.88	54.00	-20.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/29
Test Frequency	5700MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

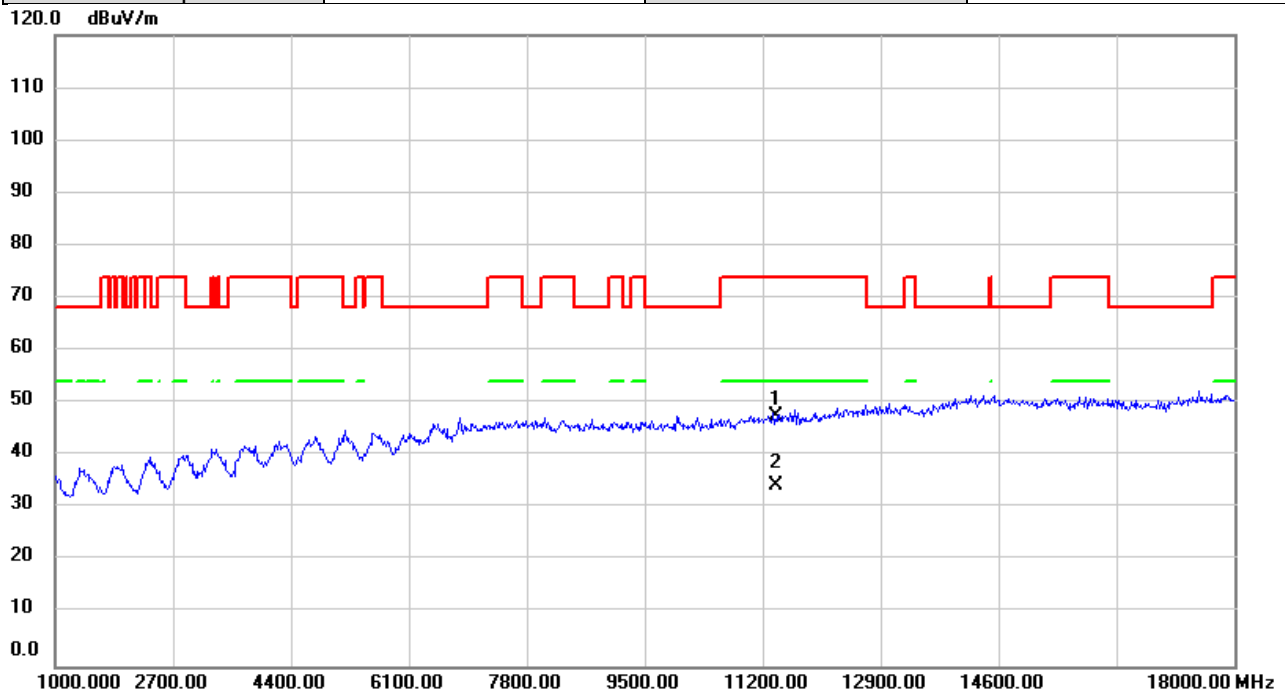


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11400.00	44.72	2.83	47.55	74.00	-26.45	peak	
2	*	11400.00	31.52	2.83	34.35	54.00	-19.65	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/29
Test Frequency	5700MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

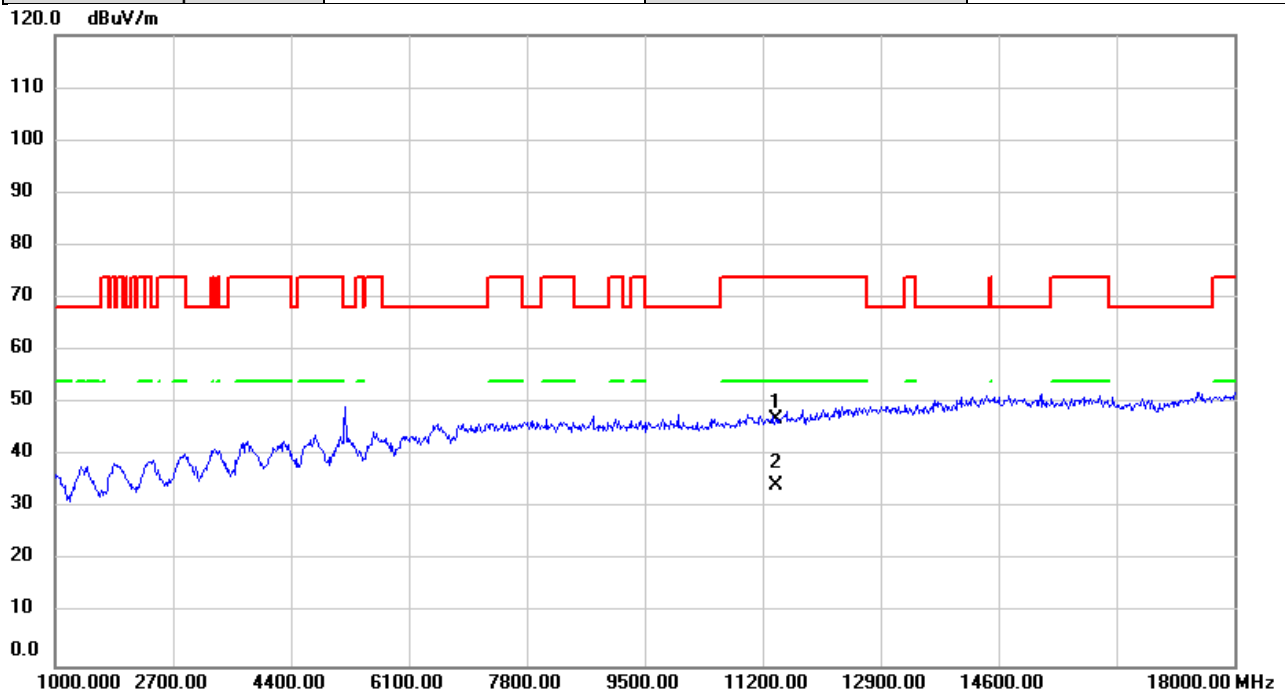


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	44.22	2.83	47.05	74.00	-26.95	peak	
2	*	11400.00	31.43	2.83	34.26	54.00	-19.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/29
Test Frequency	5720MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

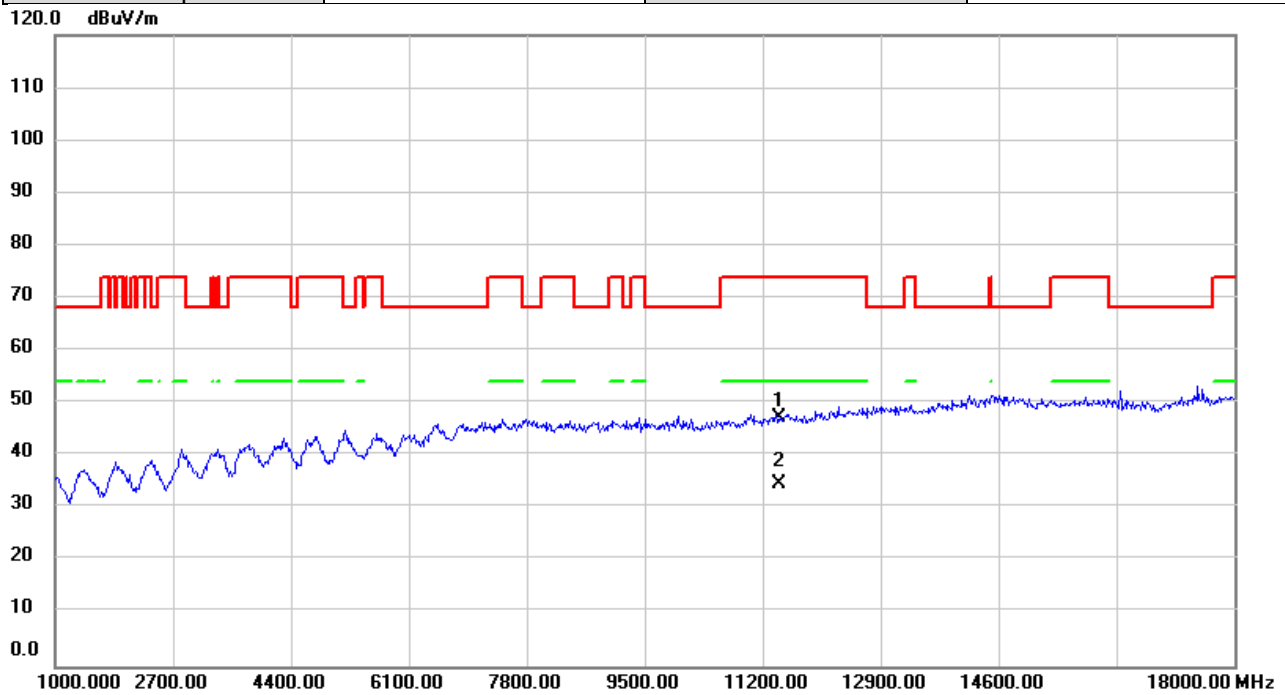


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11440.00	44.37	2.85	47.22	74.00	-26.78	peak	
2	*	11440.00	31.71	2.85	34.56	54.00	-19.44	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/29
Test Frequency	5720MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

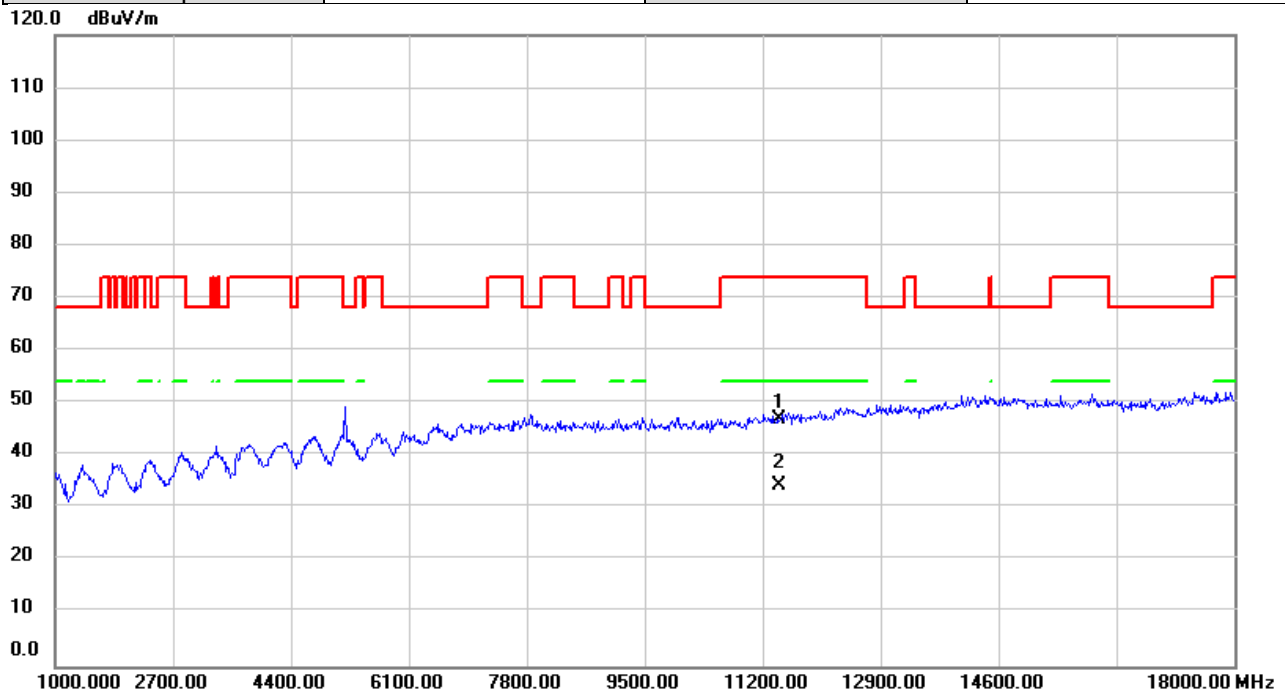


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11440.00	44.24	2.85	47.09	74.00	-26.91	peak	
2	*	11440.00	31.61	2.85	34.46	54.00	-19.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/29
Test Frequency	5745MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

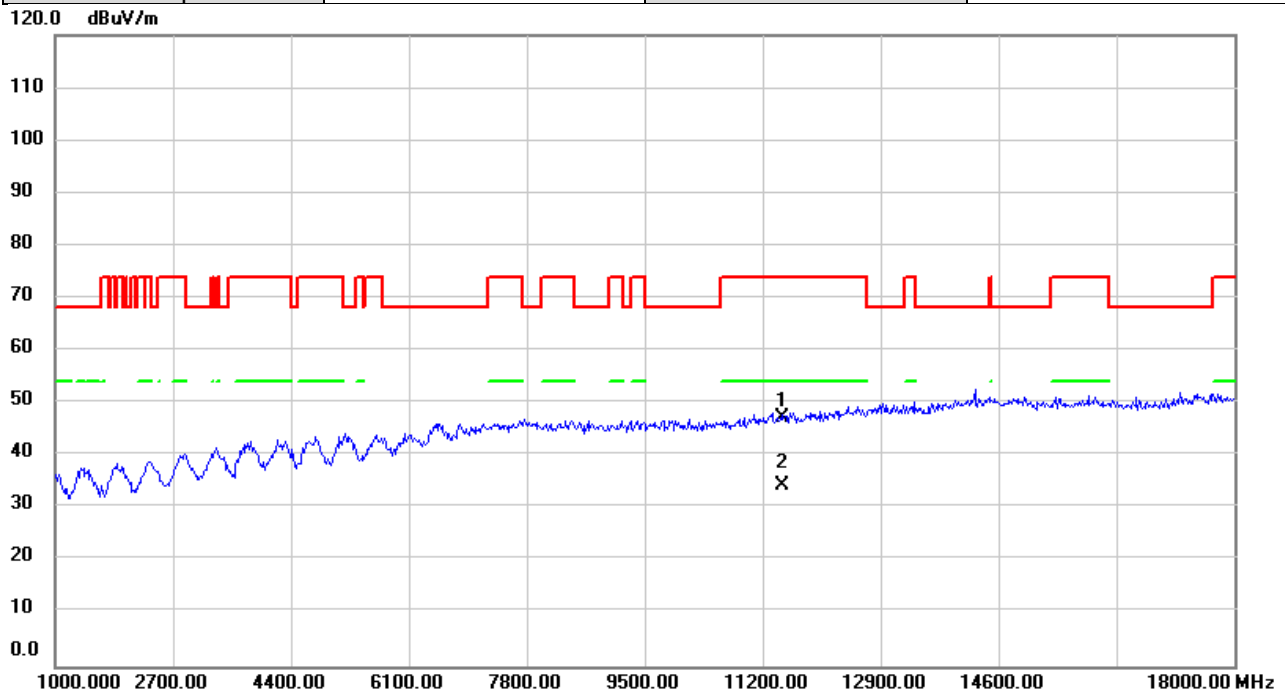


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	44.29	2.86	47.15	74.00	-26.85	peak	
2	*	11490.00	31.48	2.86	34.34	54.00	-19.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/29
Test Frequency	5745MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

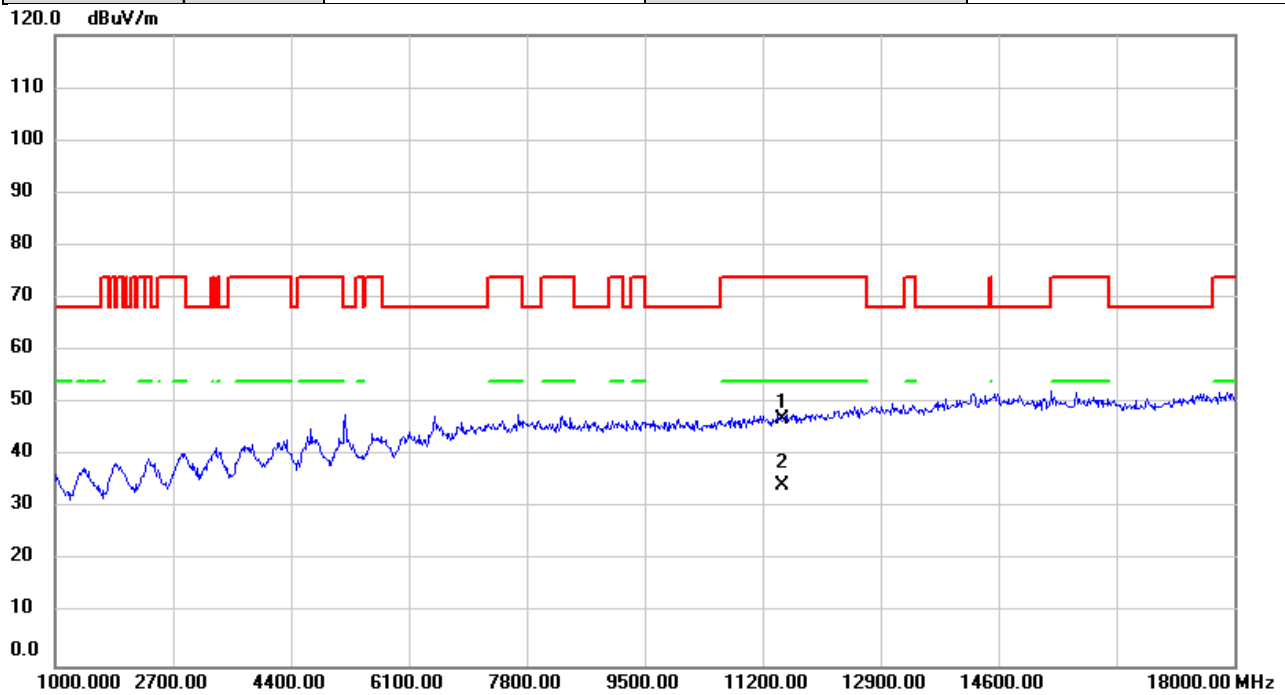


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	44.12	2.86	46.98	74.00	-27.02	peak	
2	*	11490.00	31.57	2.86	34.43	54.00	-19.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/29
Test Frequency	5785MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

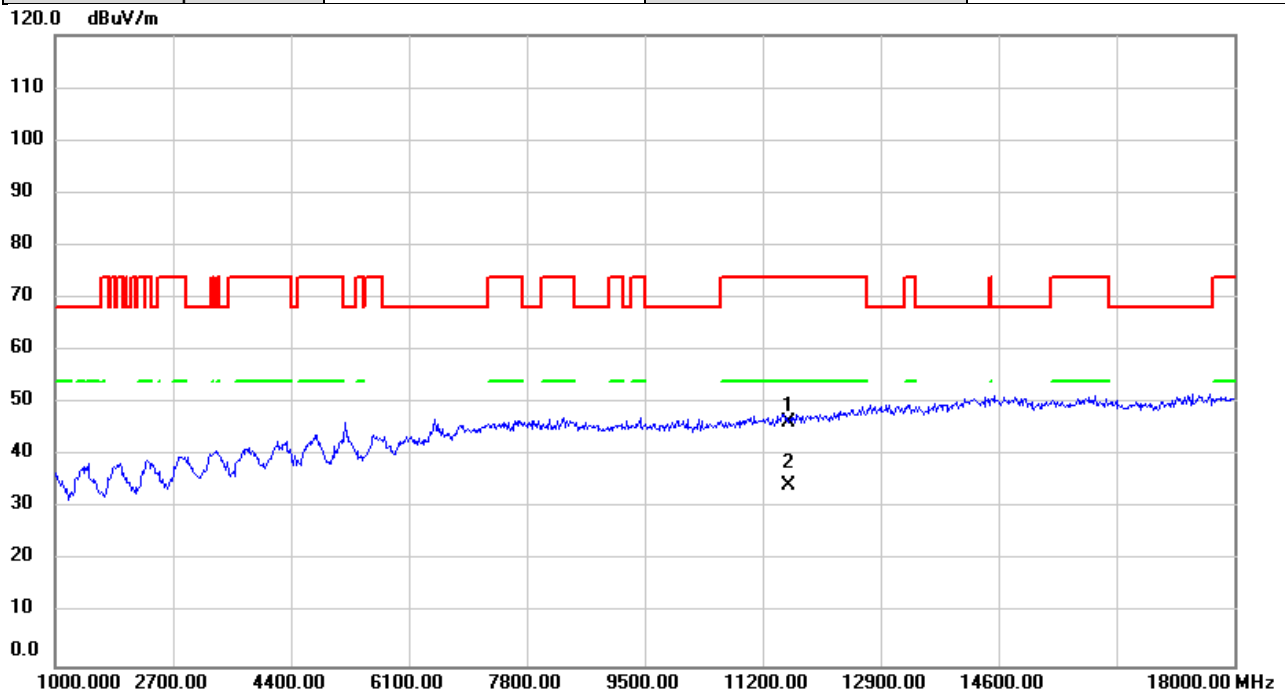


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	43.47	2.81	46.28	74.00	-27.72	peak	
2	*	11570.00	31.67	2.81	34.48	54.00	-19.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/29
Test Frequency	5785MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

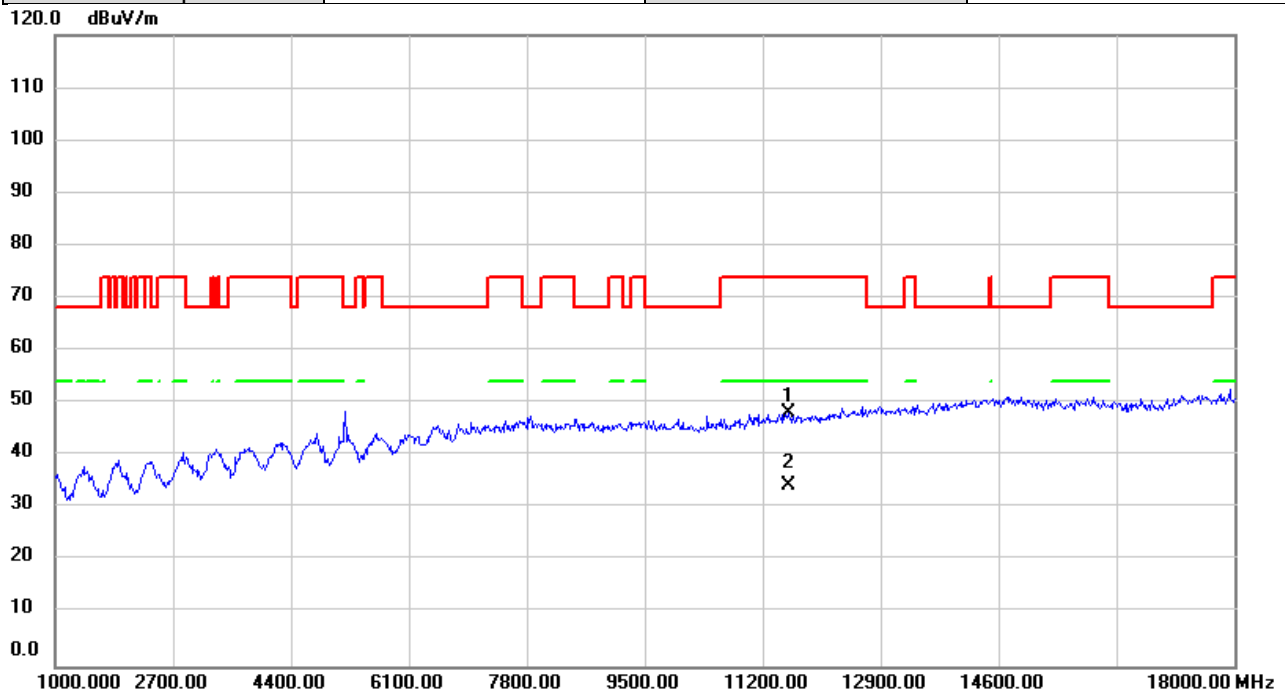


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	45.40	2.81	48.21	74.00	-25.79	peak	
2	*	11570.00	31.62	2.81	34.43	54.00	-19.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/29
Test Frequency	5825MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

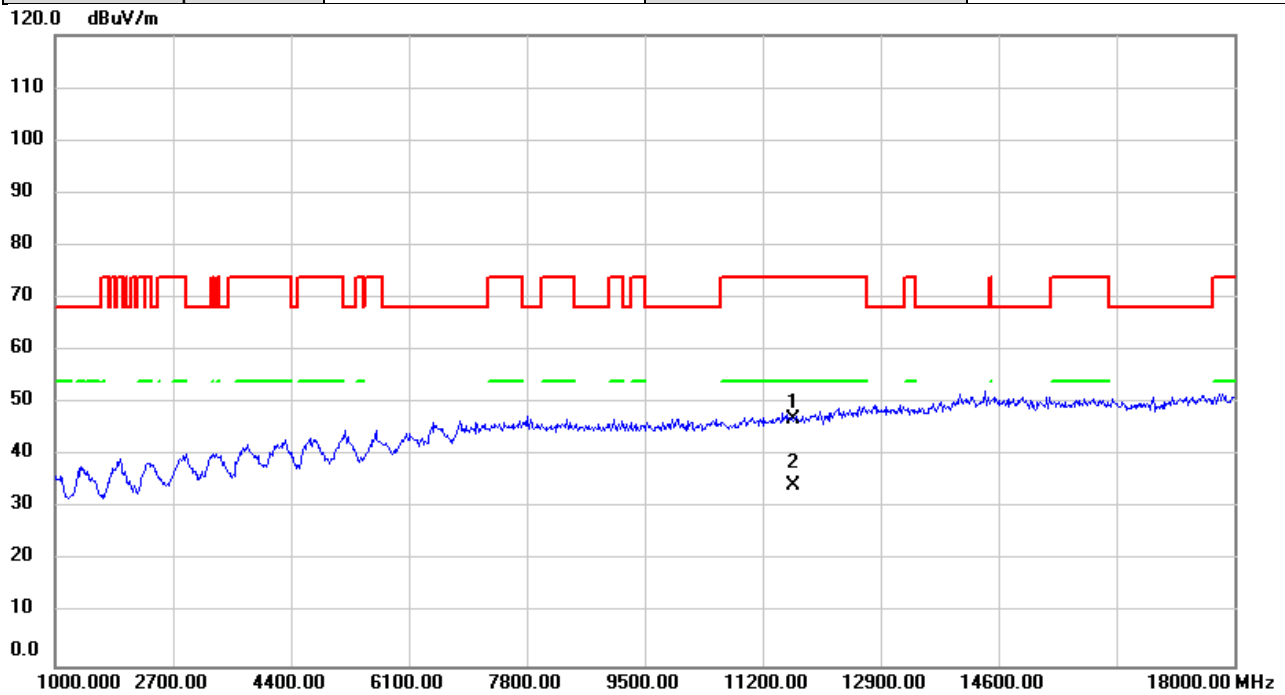


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	44.16	2.73	46.89	74.00	-27.11	peak	
2	*	11650.00	31.49	2.73	34.22	54.00	-19.78	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/12/29
Test Frequency	5825MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

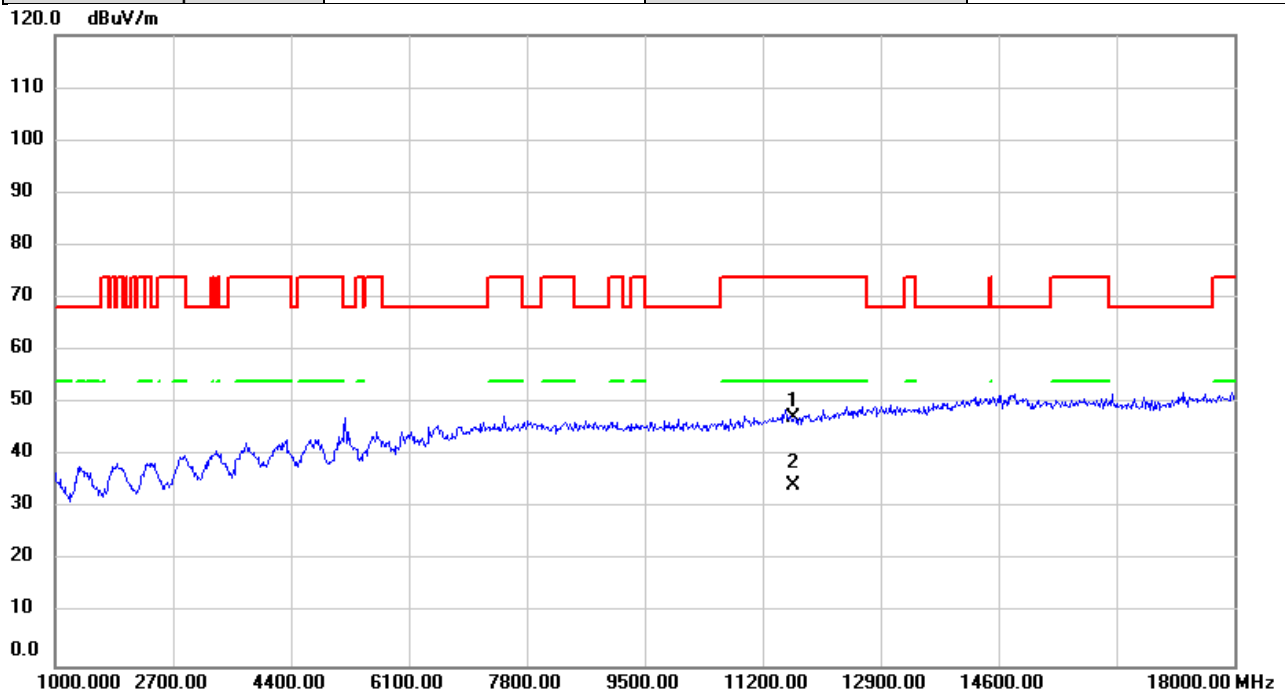


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	44.46	2.73	47.19	74.00	-26.81	peak	
2	*	11650.00	31.57	2.73	34.30	54.00	-19.70	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/29
Test Frequency	5190MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

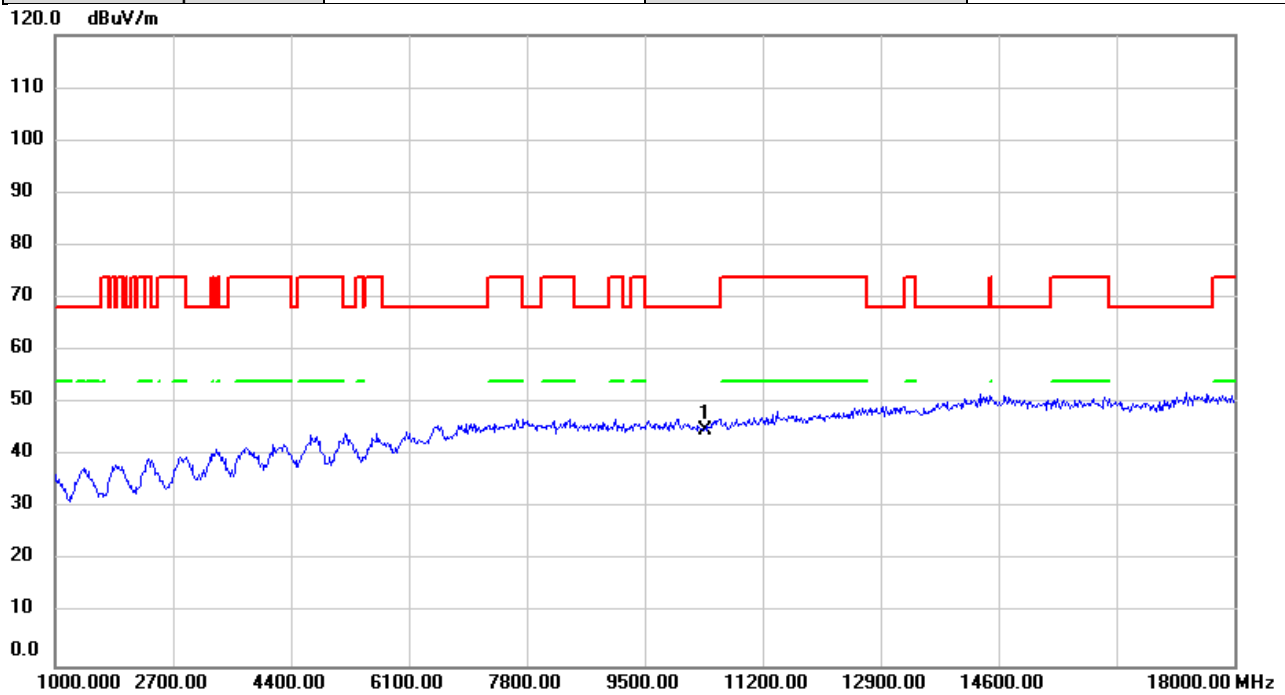


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	42.27	2.57	44.84	68.20	-23.36	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/29
Test Frequency	5190MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

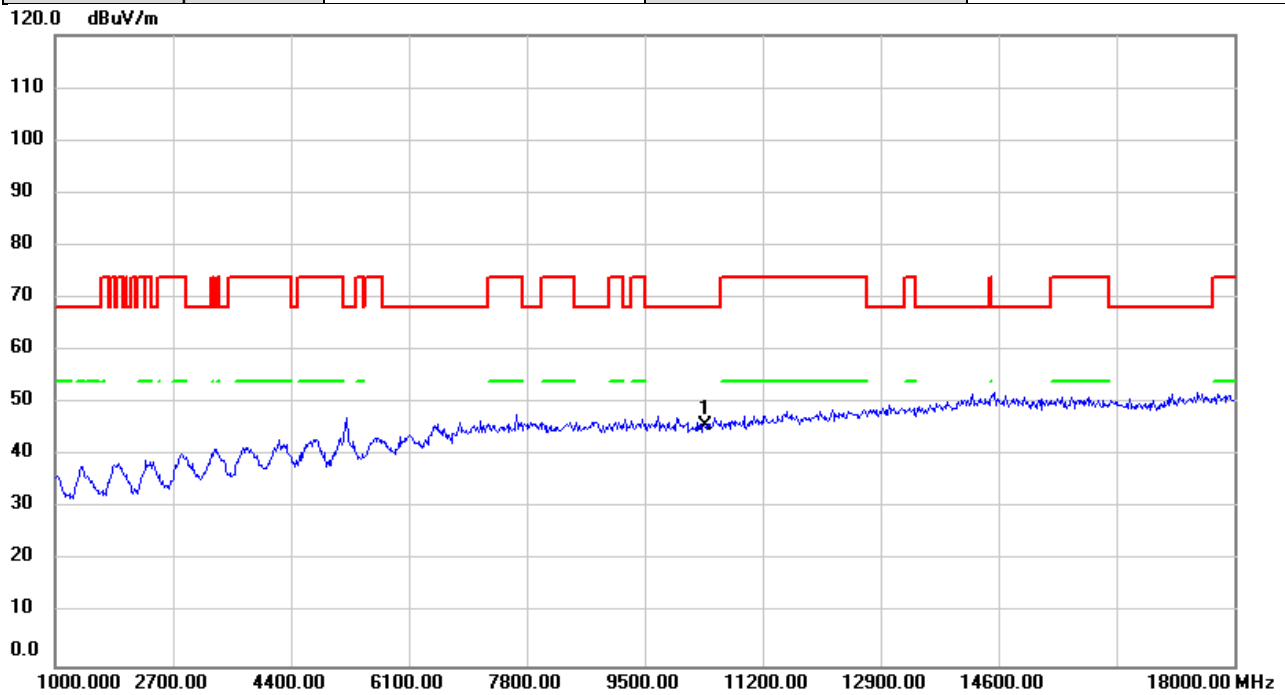


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	43.29	2.57	45.86	68.20	-22.34	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/29
Test Frequency	5230MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

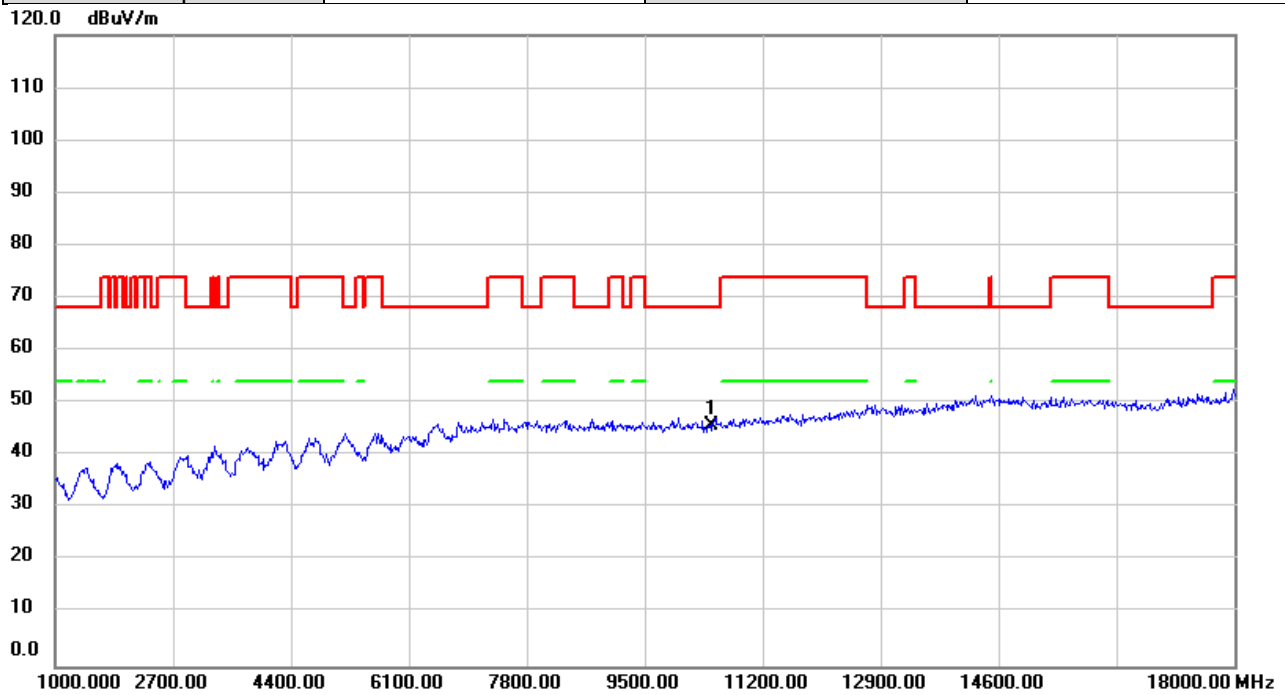


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	43.40	2.50	45.90	68.20	-22.30	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/29
Test Frequency	5230MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

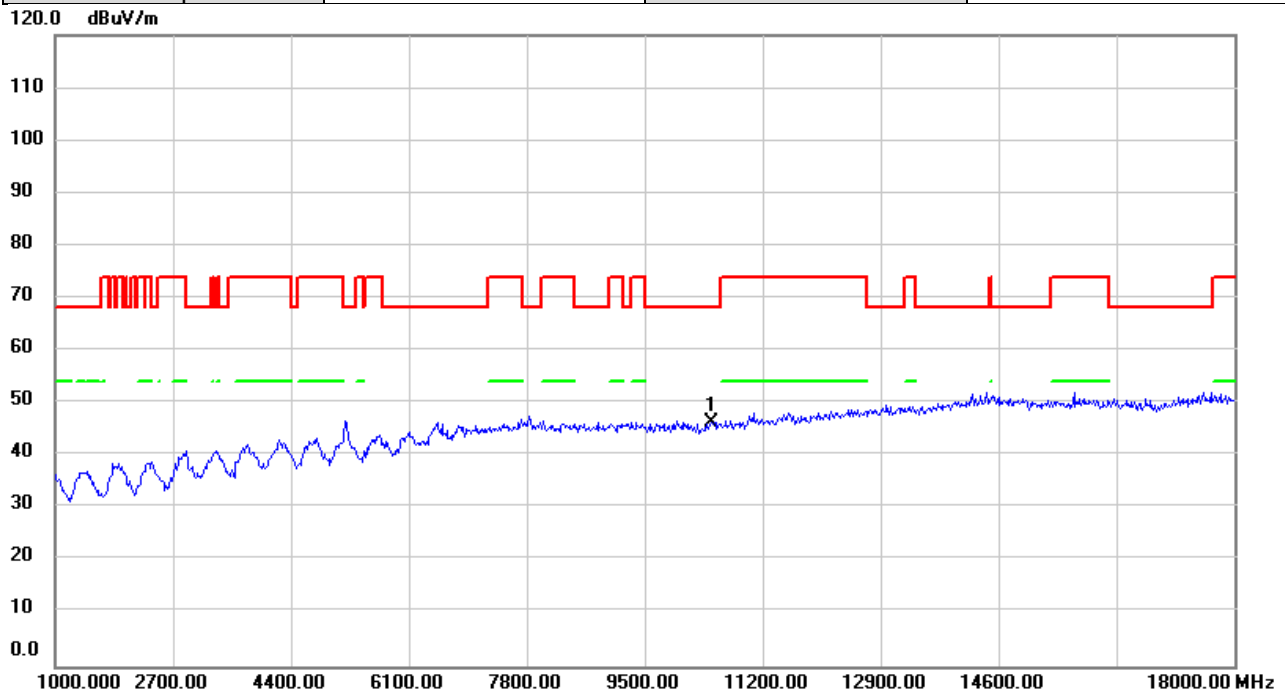


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	43.93	2.50	46.43	68.20	-21.77	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/29
Test Frequency	5270MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

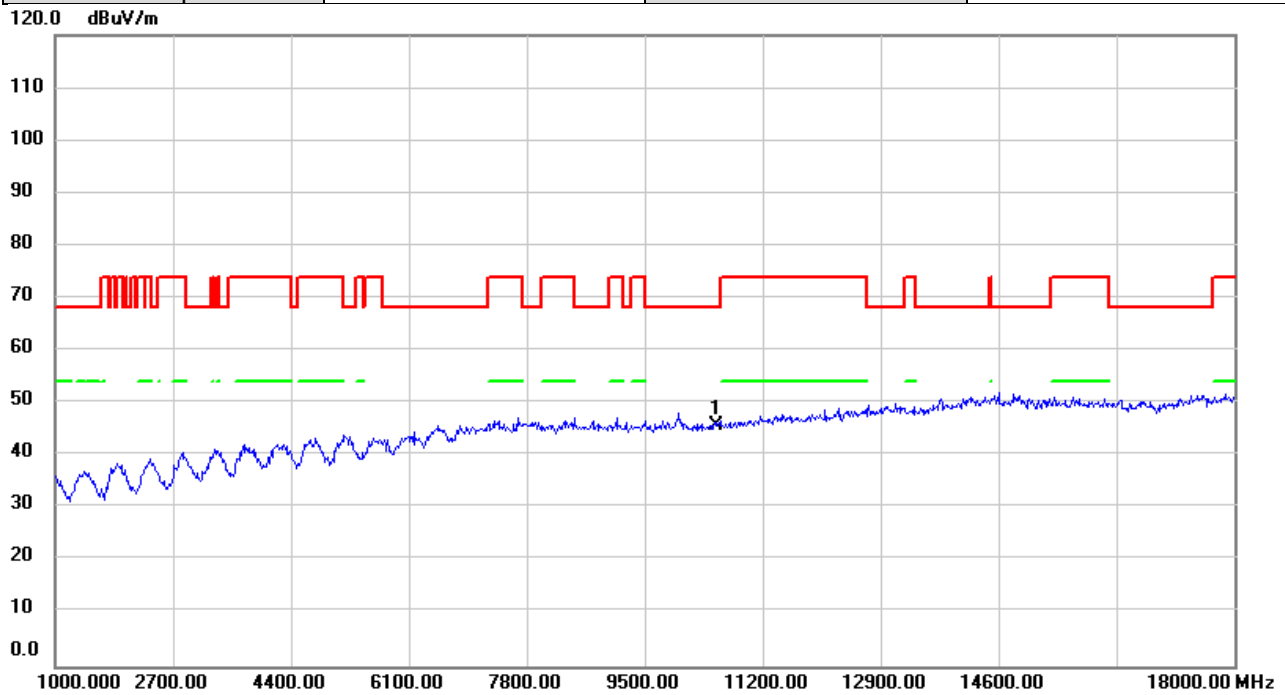


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	43.25	2.49	45.74	68.20	-22.46	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/29
Test Frequency	5270MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

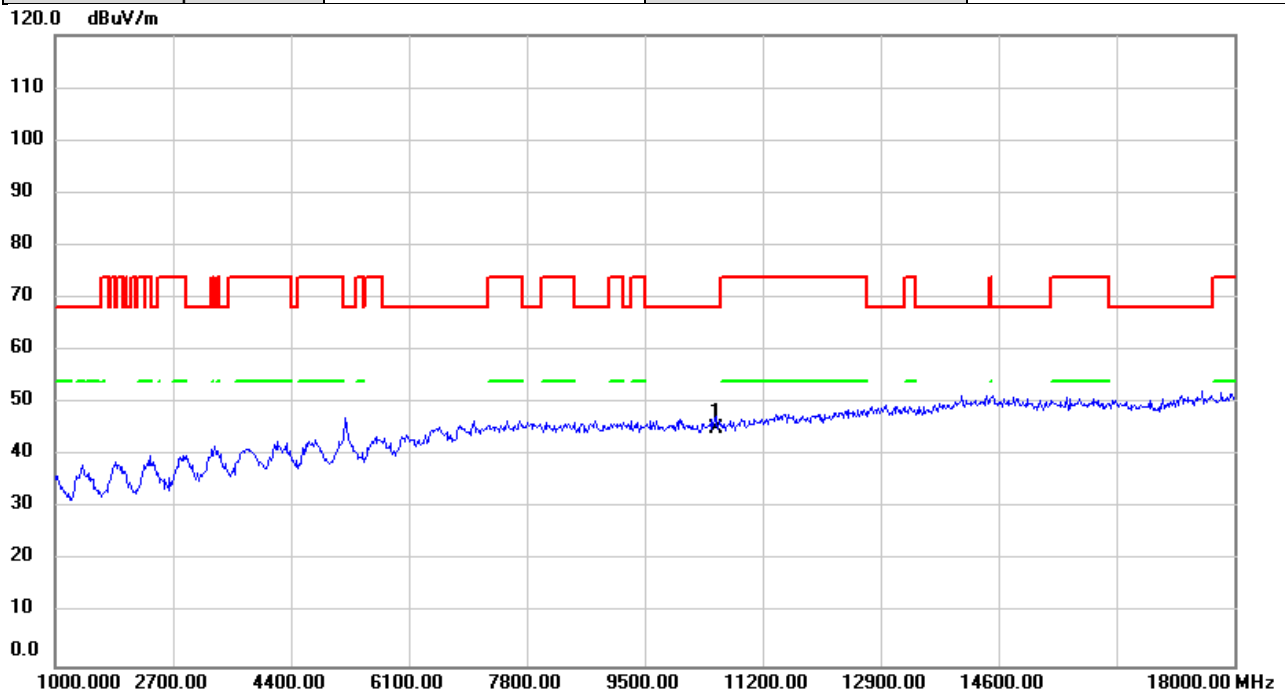


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	42.78	2.49	45.27	68.20	-22.93	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/29
Test Frequency	5310MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

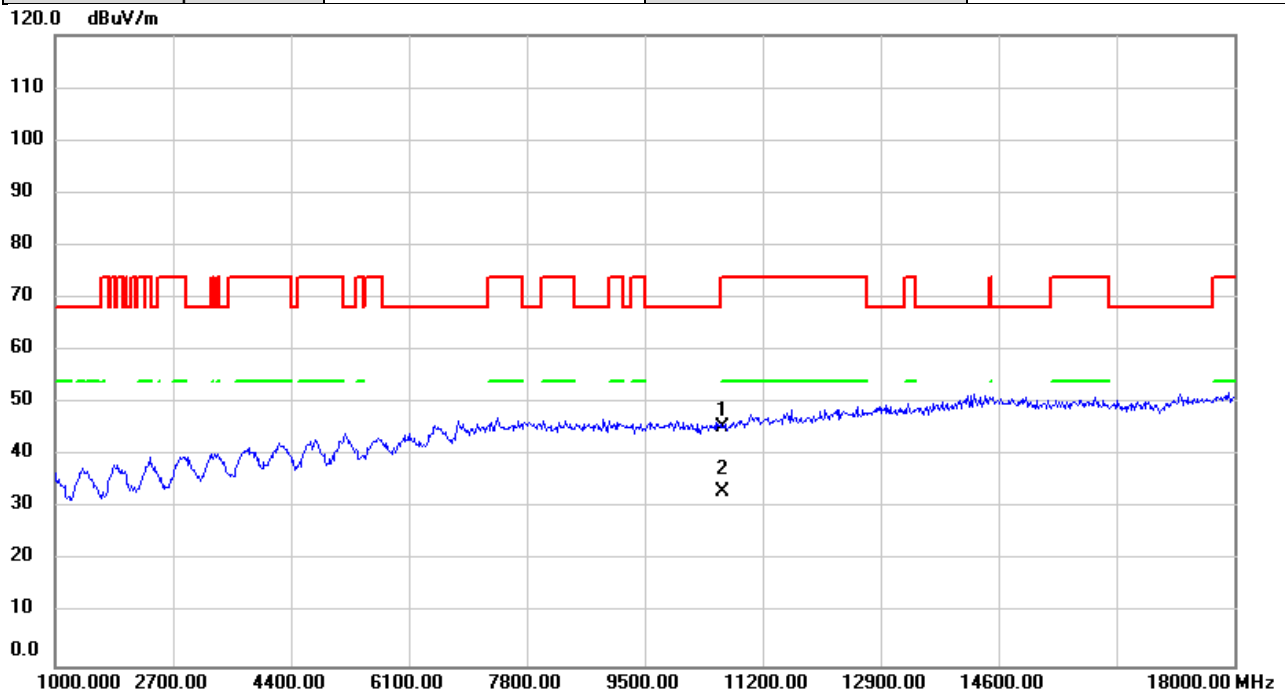


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10620.00	42.82	2.53	45.35	74.00	-28.65	peak	
2	*	10620.00	30.58	2.53	33.11	54.00	-20.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/29
Test Frequency	5310MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

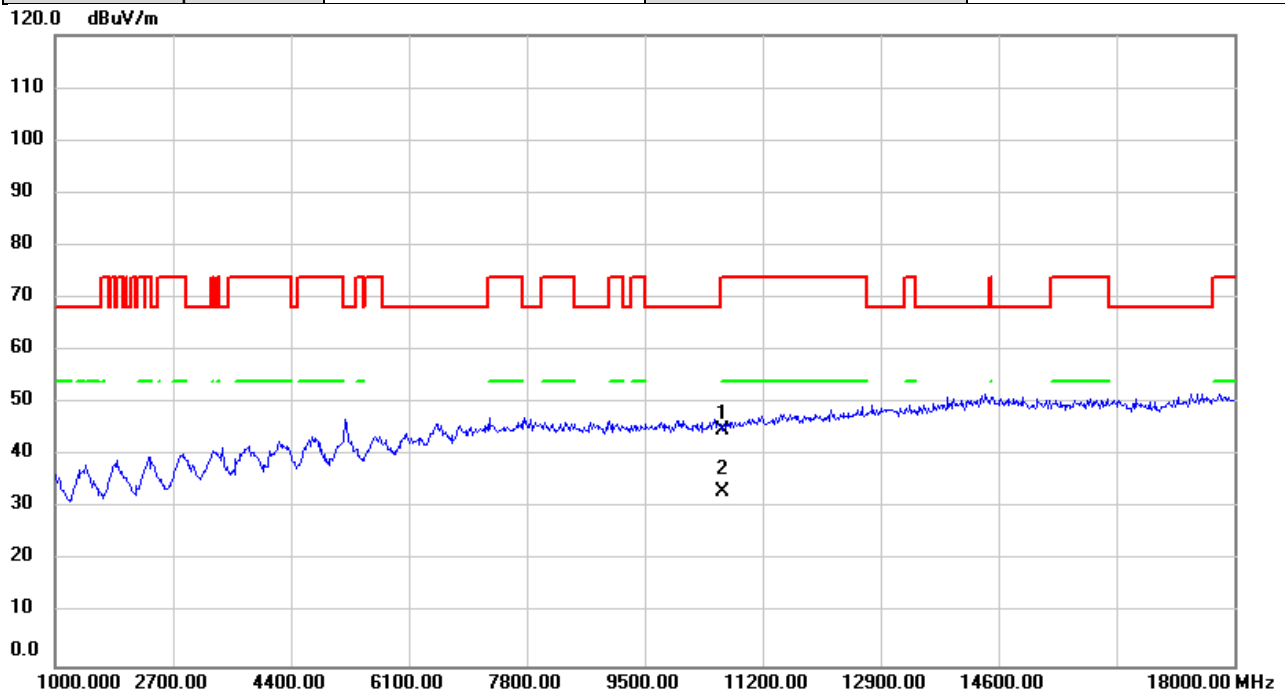


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	42.39	2.53	44.92	74.00	-29.08	peak	
2	*	10620.00	30.62	2.53	33.15	54.00	-20.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/29
Test Frequency	5510MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

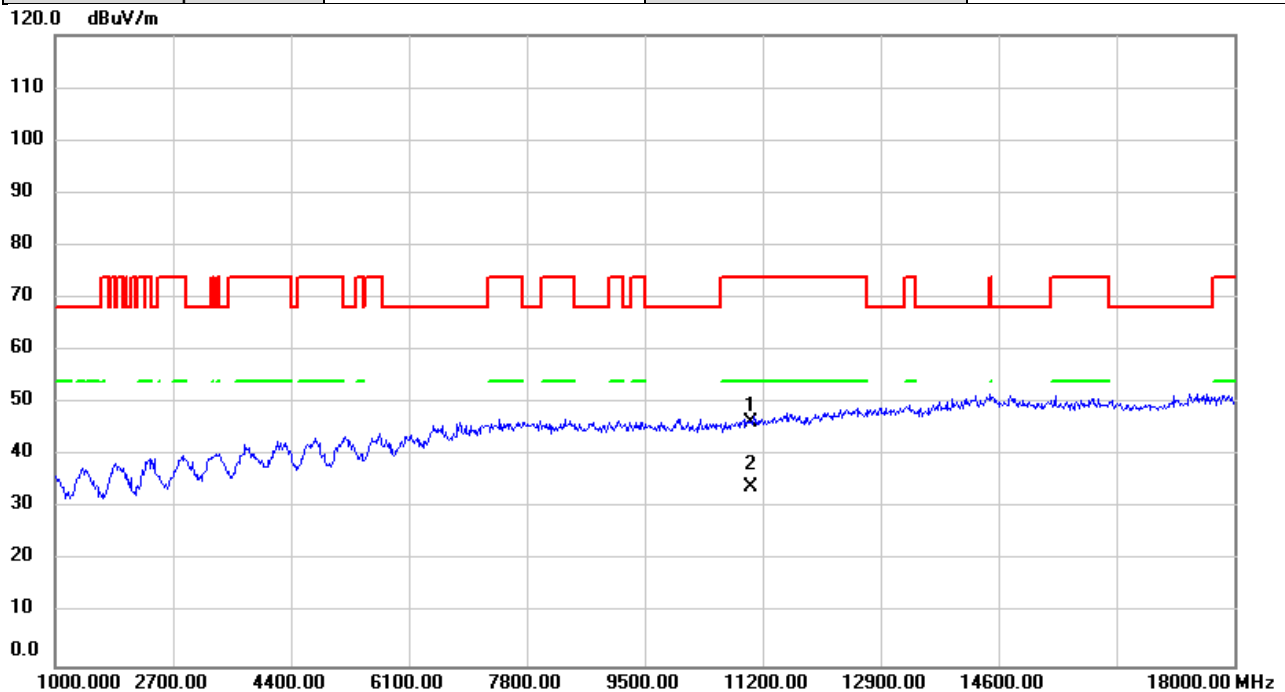


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11020.00	43.55	2.71	46.26	74.00	-27.74	peak	
2	*	11020.00	31.27	2.71	33.98	54.00	-20.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/29
Test Frequency	5510MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

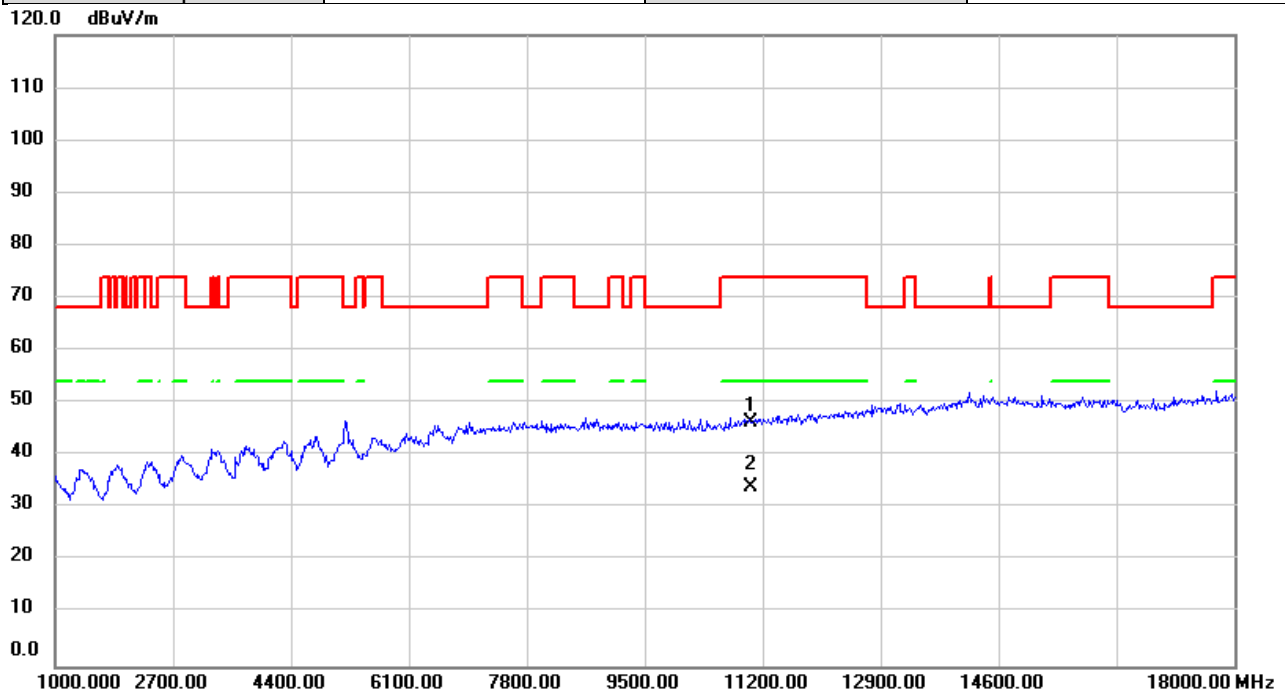


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11020.00	43.49	2.71	46.20	74.00	-27.80	peak	
2	*	11020.00	31.35	2.71	34.06	54.00	-19.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/29
Test Frequency	5590MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

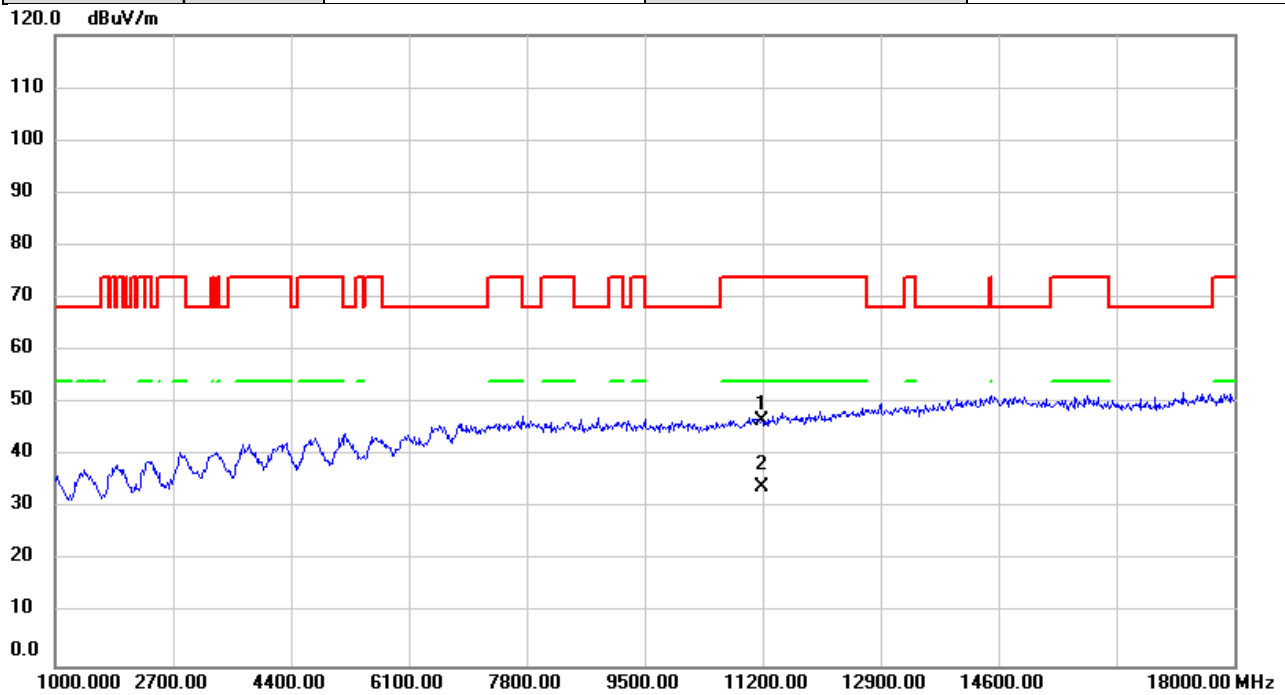


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11180.00	43.76	2.76	46.52	74.00	-27.48	peak	
2	*	11180.00	31.16	2.76	33.92	54.00	-20.08	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/29
Test Frequency	5590MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

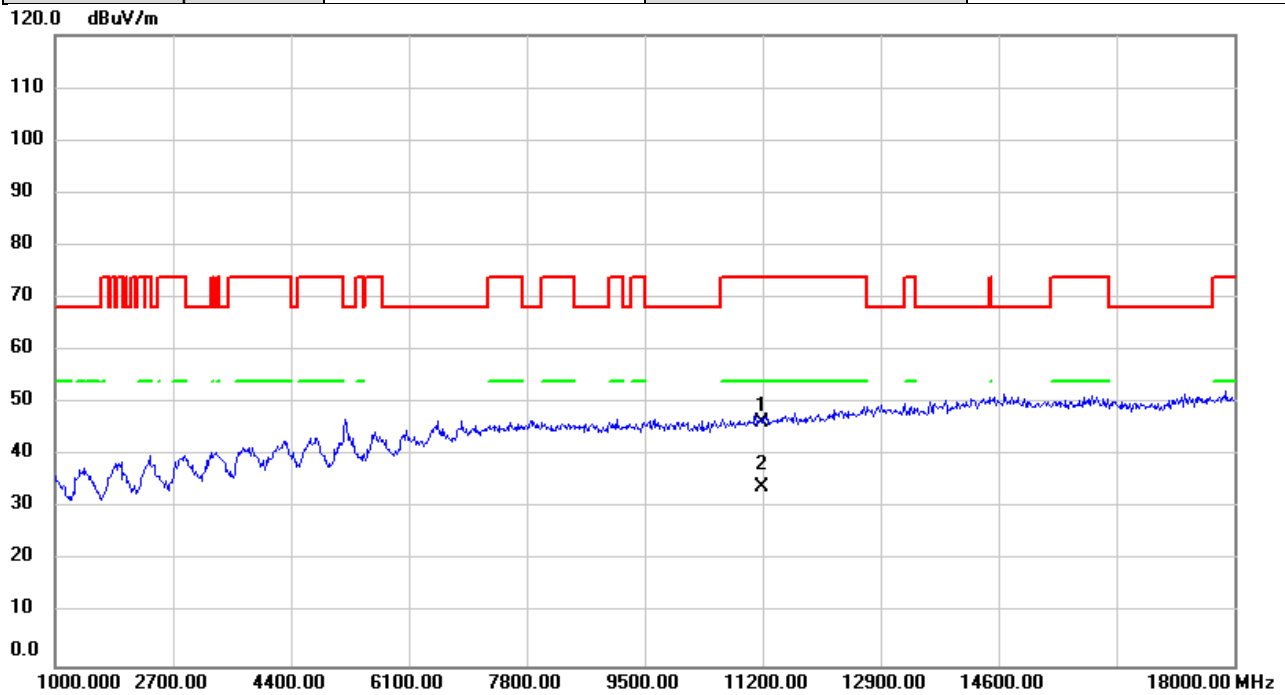


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11180.00	43.45	2.76	46.21	74.00	-27.79	peak	
2	*	11180.00	31.25	2.76	34.01	54.00	-19.99	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/29
Test Frequency	5670MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

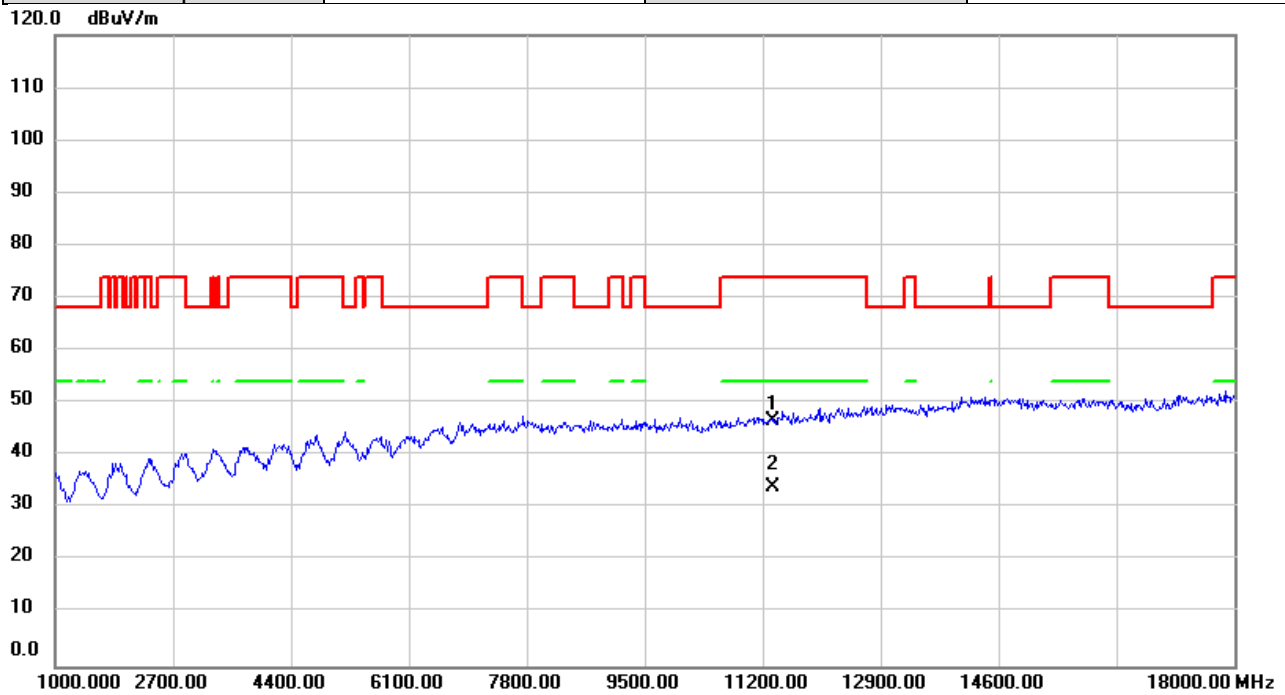


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11340.00	43.81	2.81	46.62	74.00	-27.38	peak	
2	*	11340.00	31.37	2.81	34.18	54.00	-19.82	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/29
Test Frequency	5670MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

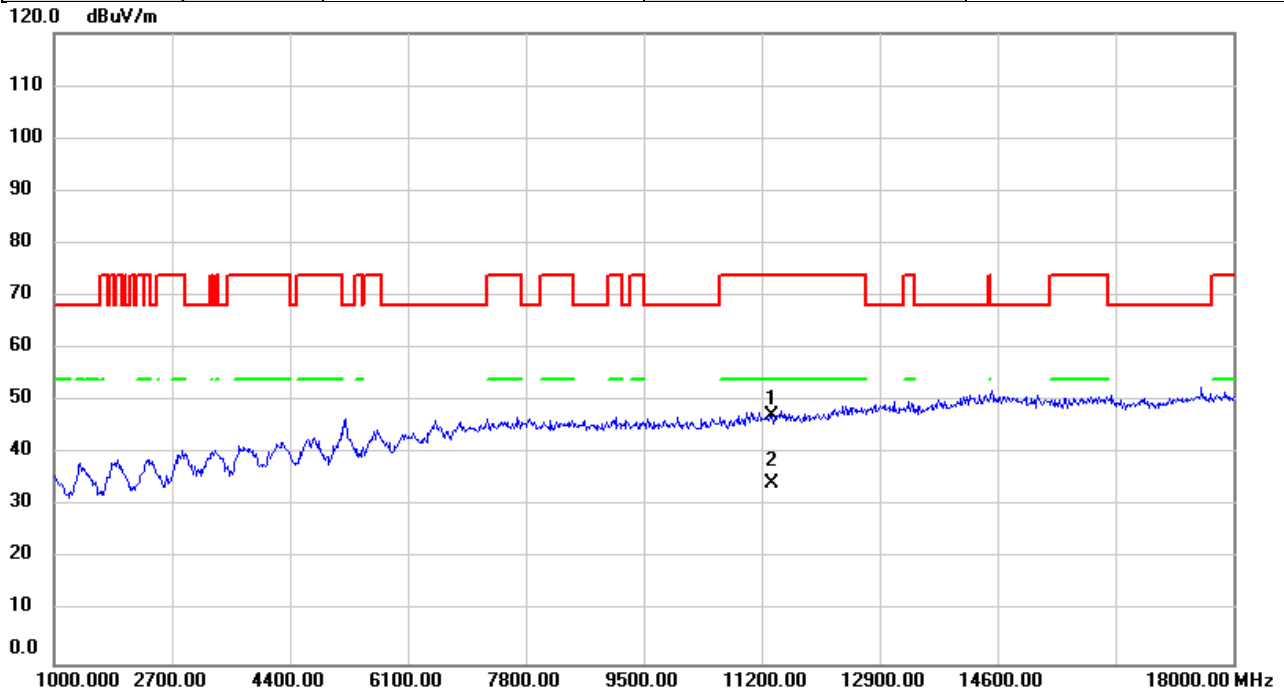


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	44.47	2.81	47.28	74.00	-26.72	peak	
2	*	11340.00	31.39	2.81	34.20	54.00	-19.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/29
Test Frequency	5710MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

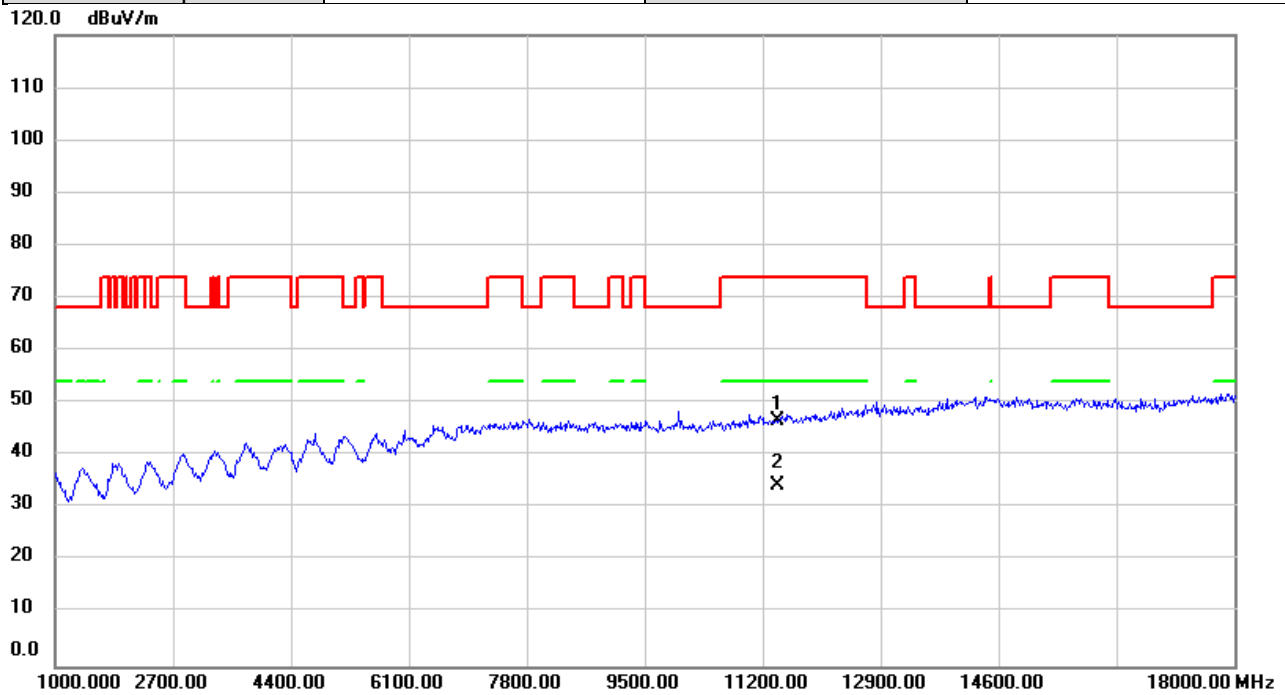


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11420.00	43.90	2.84	46.74	74.00	-27.26	peak	
2	*	11420.00	31.61	2.84	34.45	54.00	-19.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/29
Test Frequency	5710MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

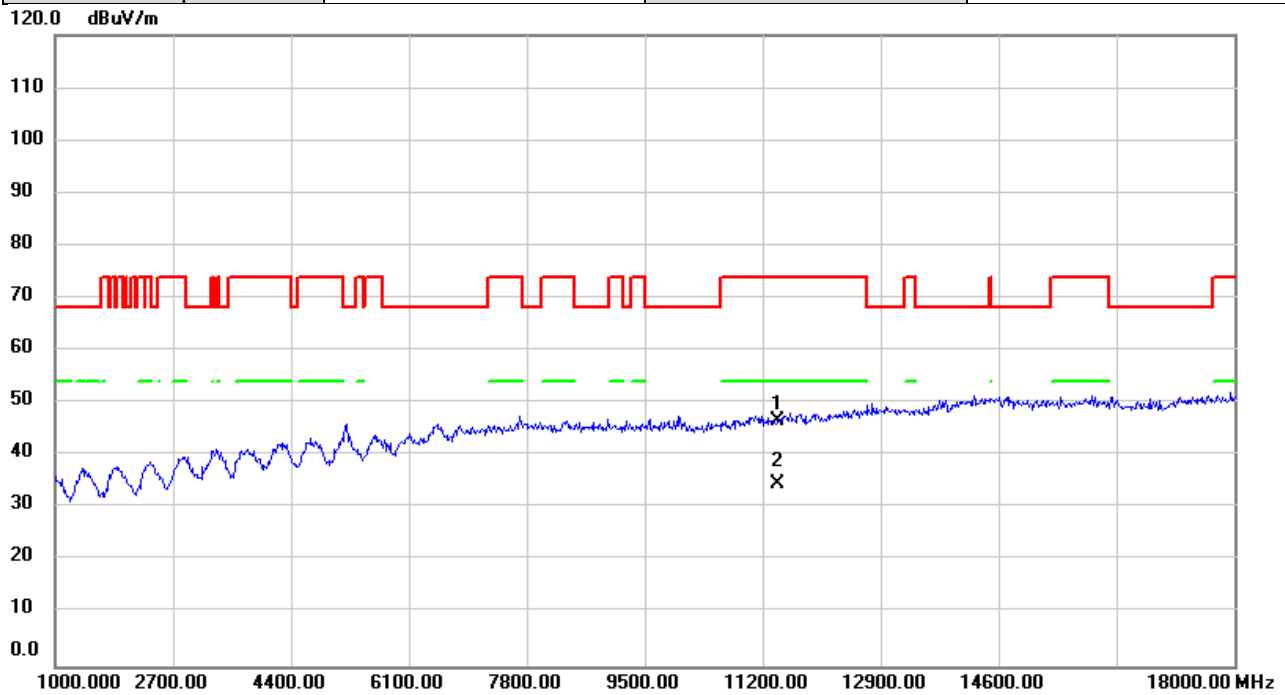


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11420.00	43.89	2.84	46.73	74.00	-27.27	peak	
2	*	11420.00	31.68	2.84	34.52	54.00	-19.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/29
Test Frequency	5755MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

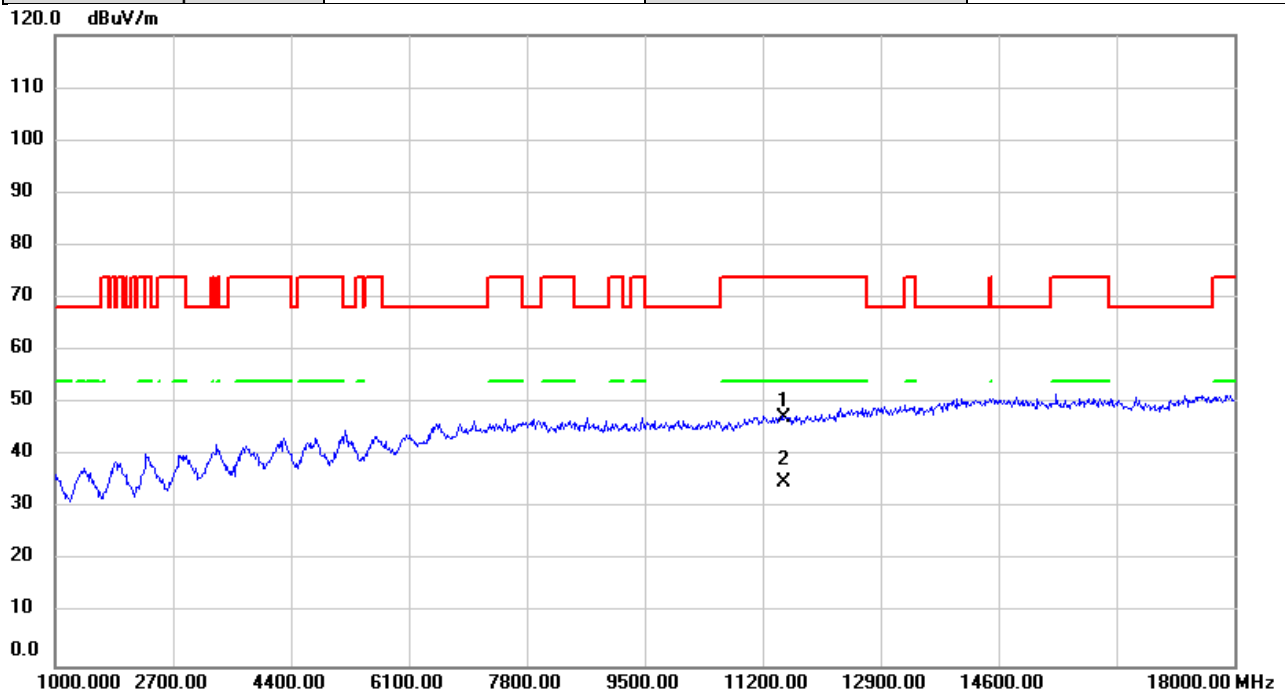


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11510.00	44.28	2.85	47.13	74.00	-26.87	peak	
2	*	11510.00	32.07	2.85	34.92	54.00	-19.08	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/29
Test Frequency	5755MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

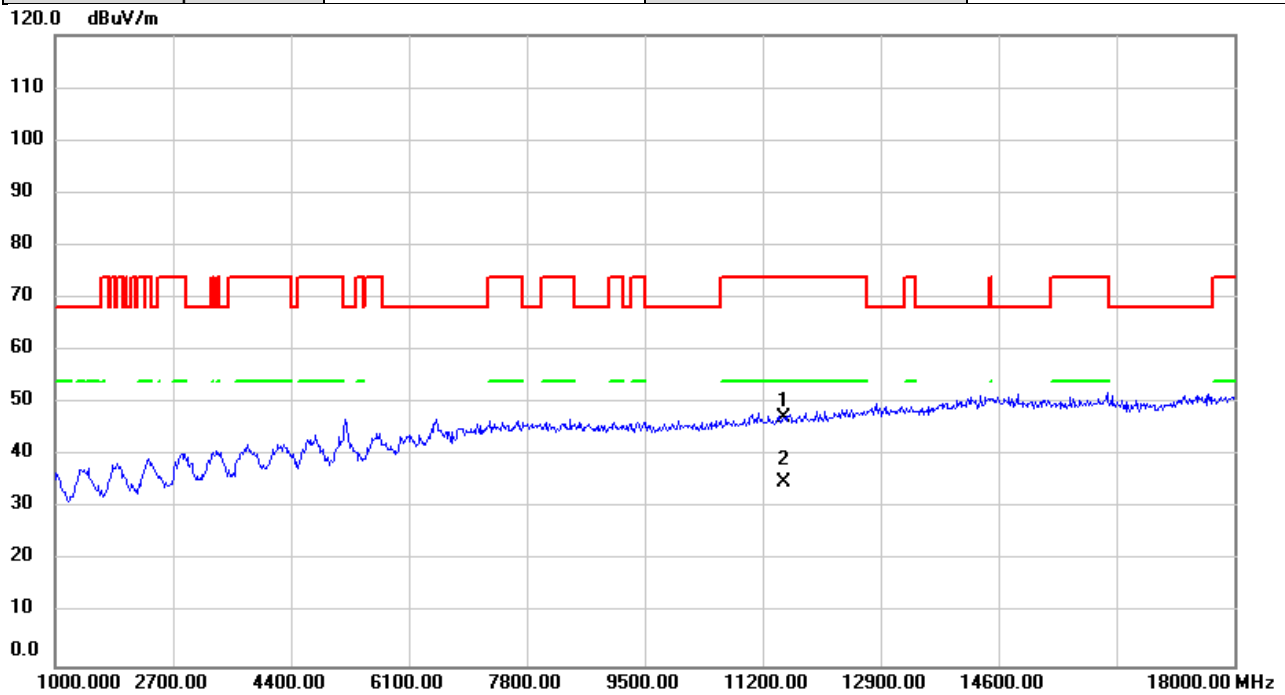


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11510.00	44.53	2.85	47.38	74.00	-26.62	peak	
2	*	11510.00	32.03	2.85	34.88	54.00	-19.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/29
Test Frequency	5795MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

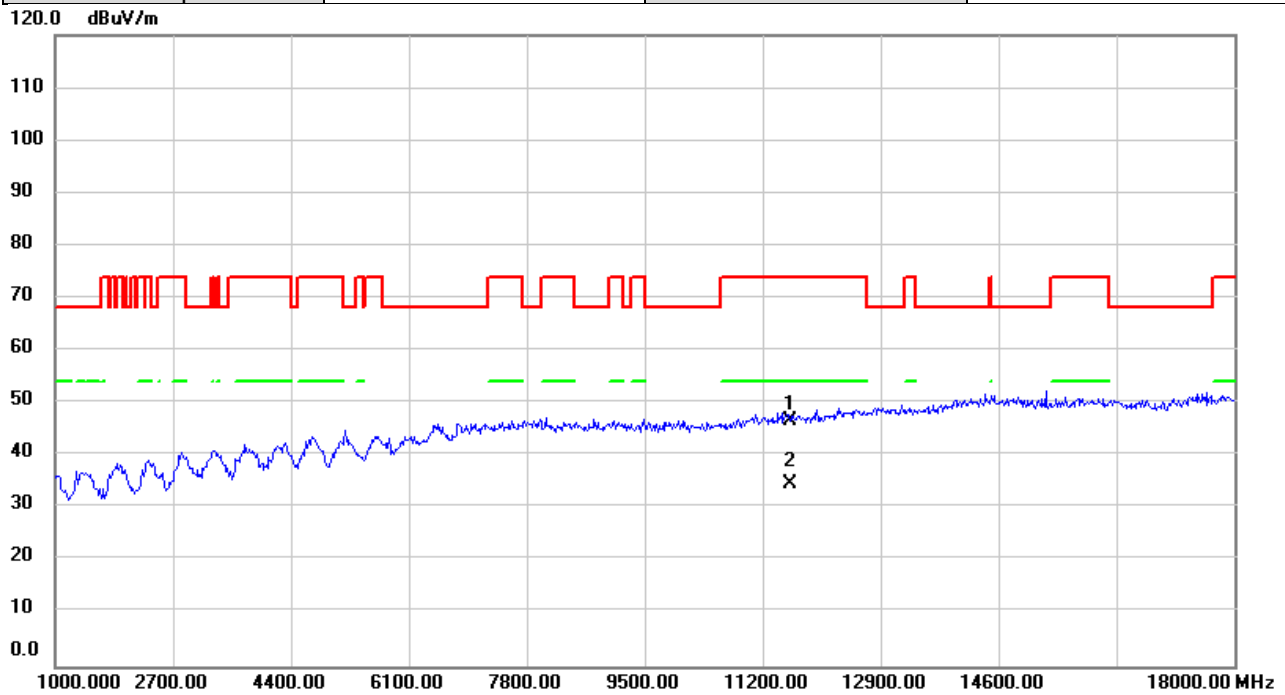


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11590.00	43.85	2.79	46.64	74.00	-27.36	peak	
2	*	11590.00	31.88	2.79	34.67	54.00	-19.33	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/12/29
Test Frequency	5795MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

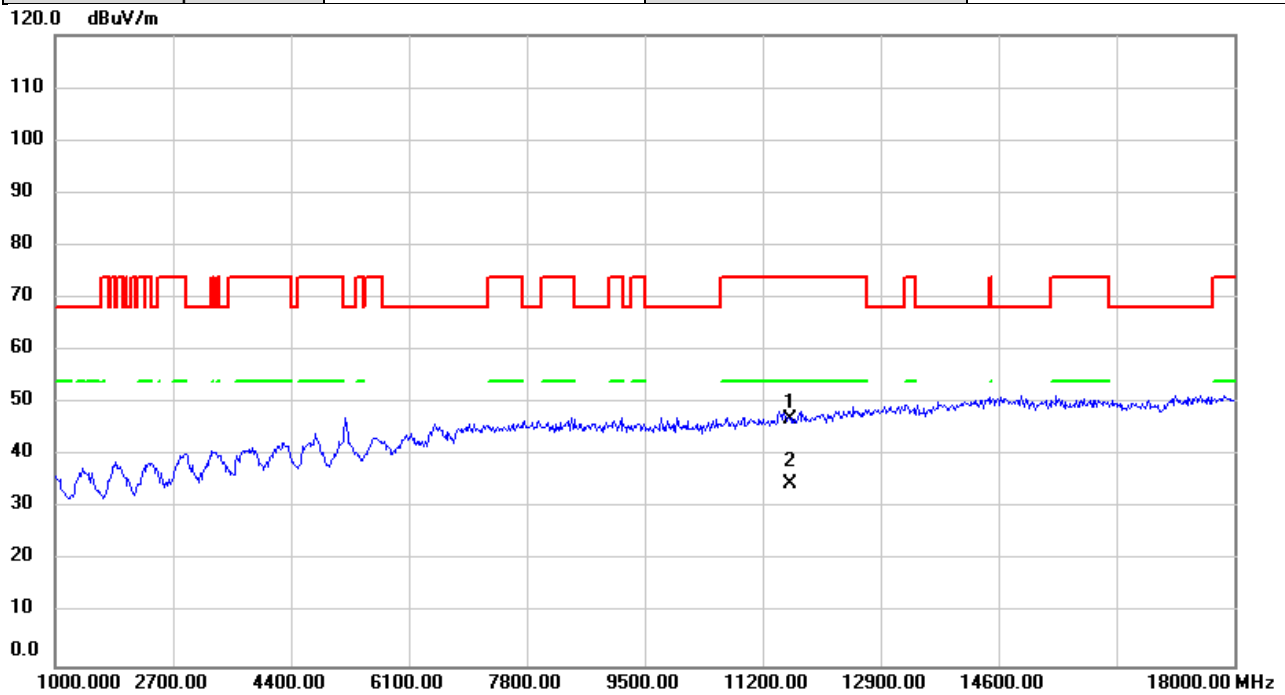


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11590.00	44.16	2.79	46.95	74.00	-27.05	peak	
2	*	11590.00	31.83	2.79	34.62	54.00	-19.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/29
Test Frequency	5210MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

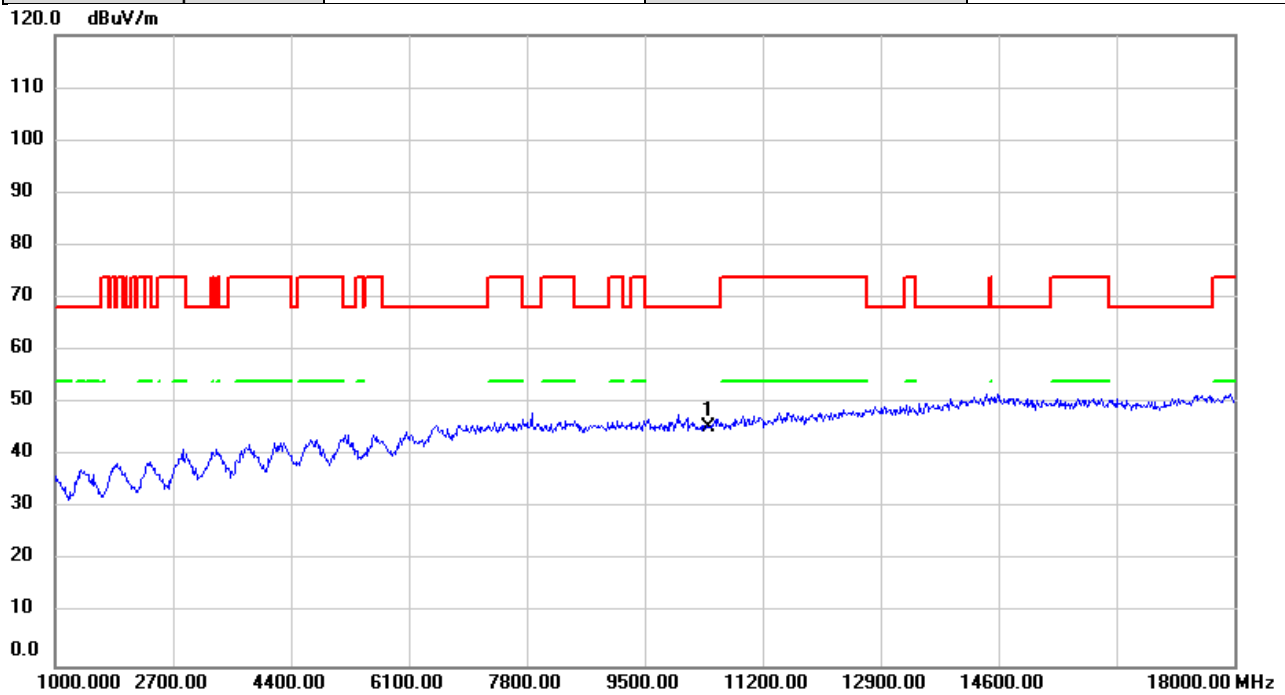


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	42.85	2.53	45.38	68.20	-22.82	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/29
Test Frequency	5210MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

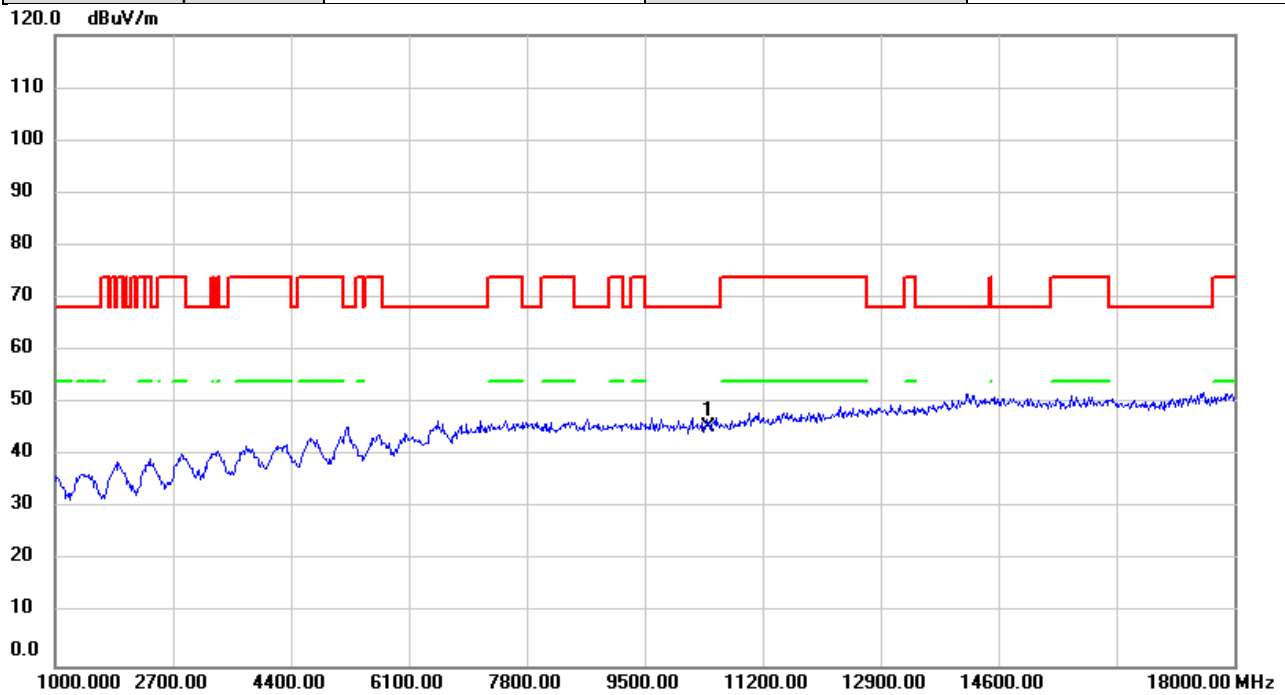


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	43.06	2.53	45.59	68.20	-22.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/29
Test Frequency	5290MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

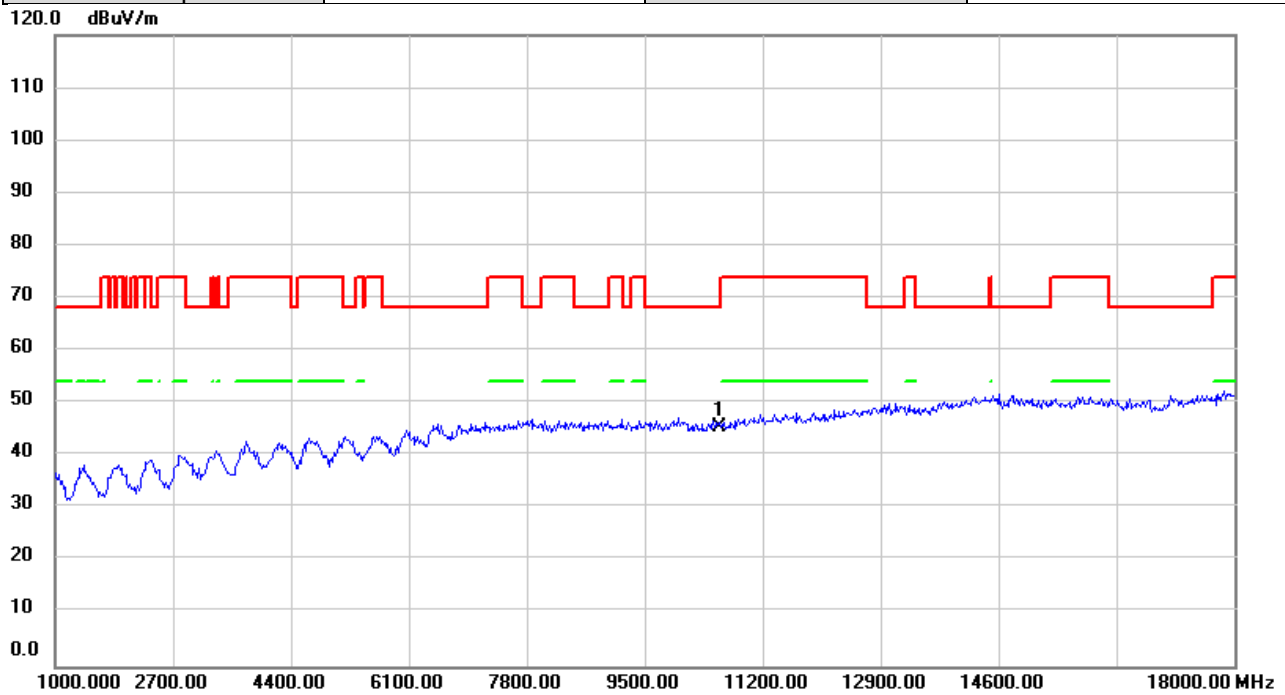


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	43.09	2.50	45.59	68.20	-22.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/29
Test Frequency	5290MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

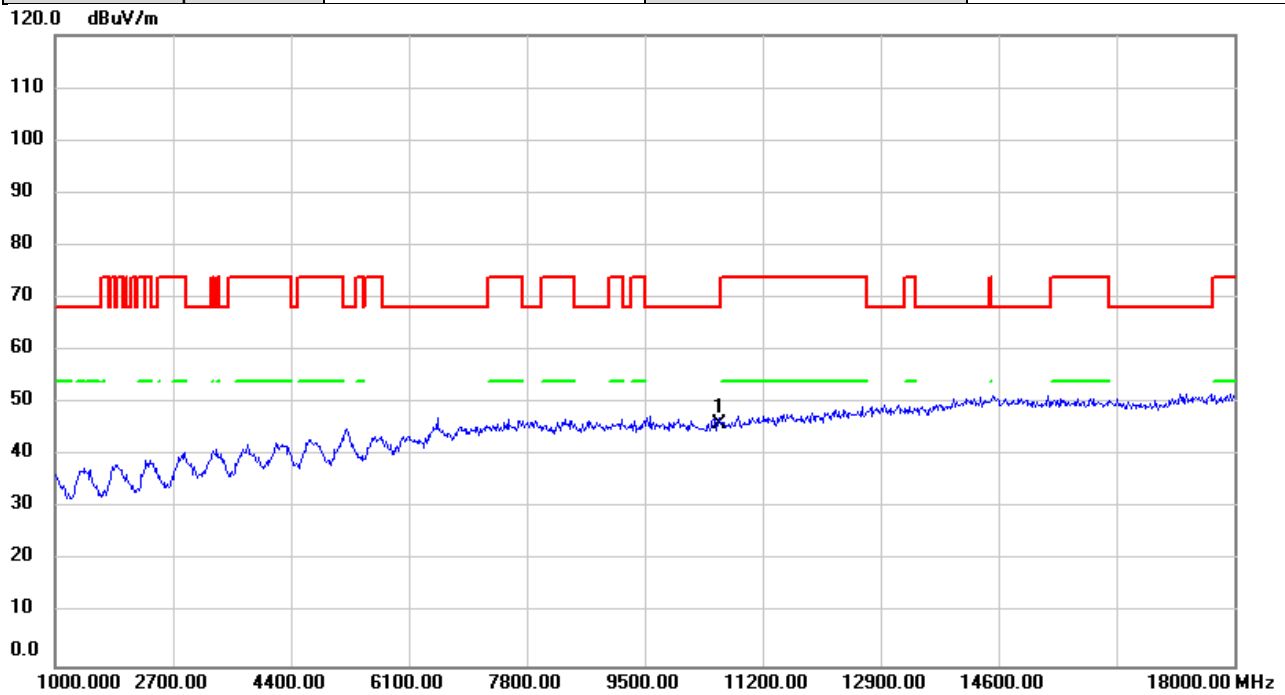


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	43.69	2.50	46.19	68.20	-22.01	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/29
Test Frequency	5530MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

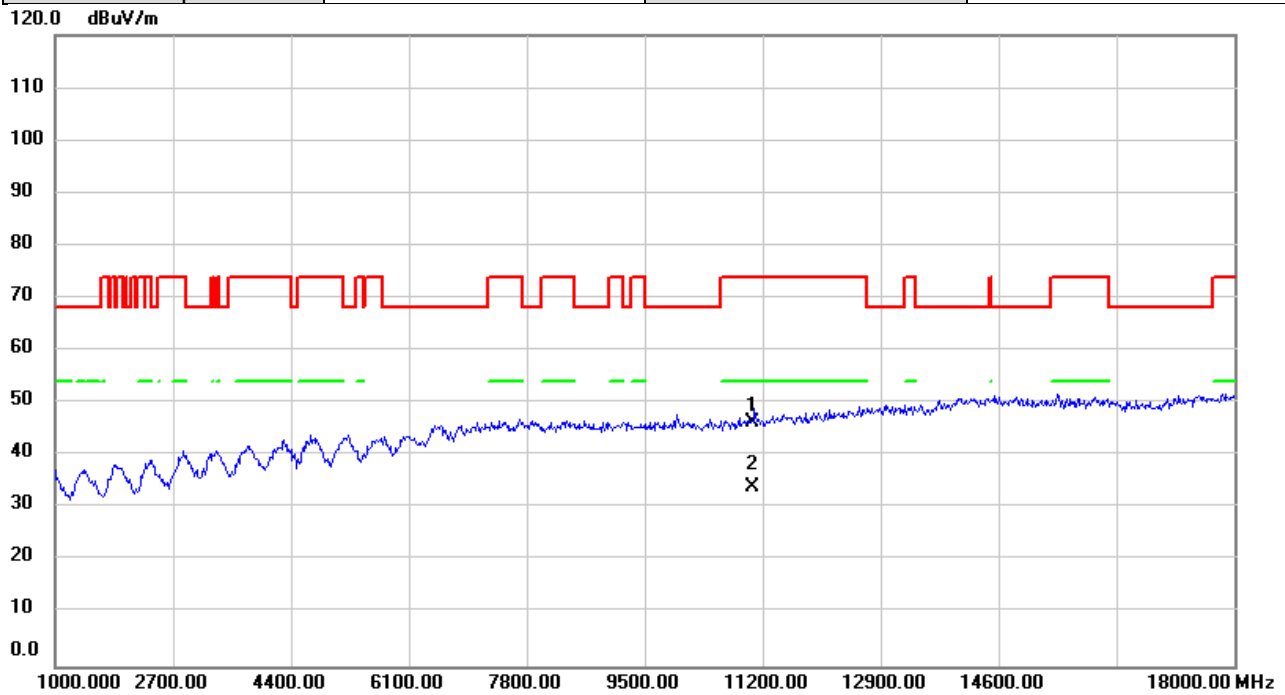


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11060.00	43.70	2.72	46.42	74.00	-27.58	peak	
2	*	11060.00	31.38	2.72	34.10	54.00	-19.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/29
Test Frequency	5530MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

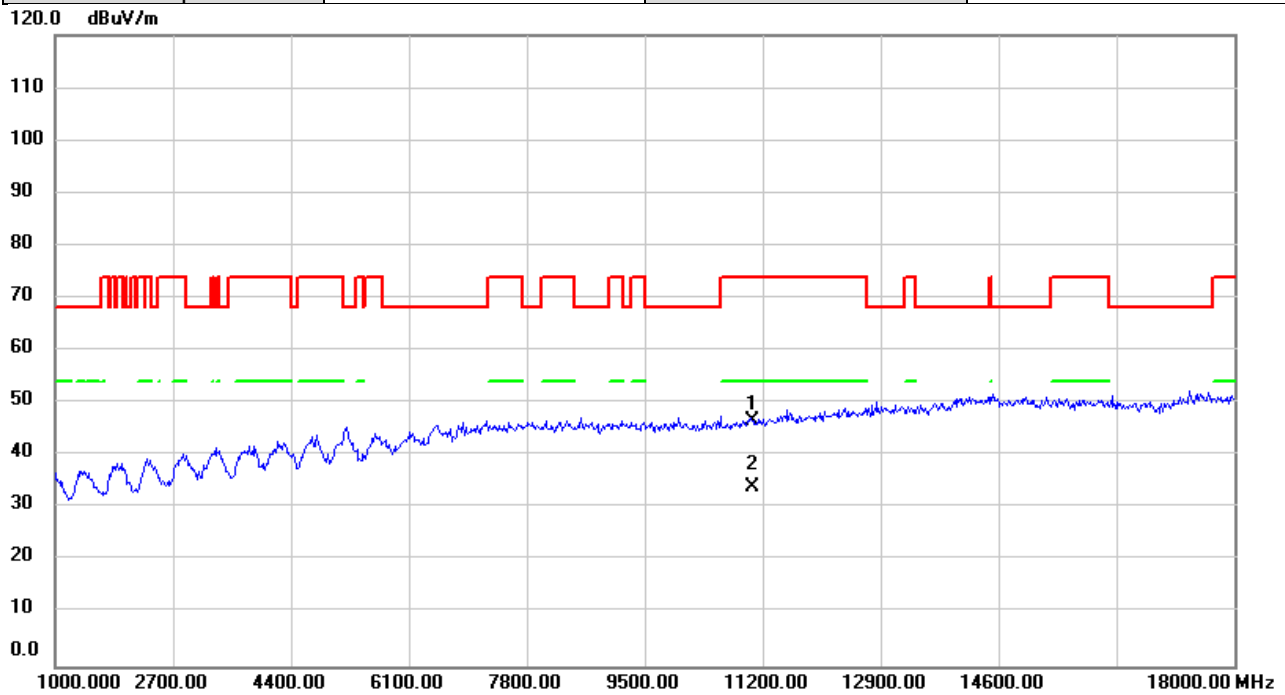


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11060.00	43.81	2.72	46.53	74.00	-27.47	peak	
2	*	11060.00	31.30	2.72	34.02	54.00	-19.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/29
Test Frequency	5610MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

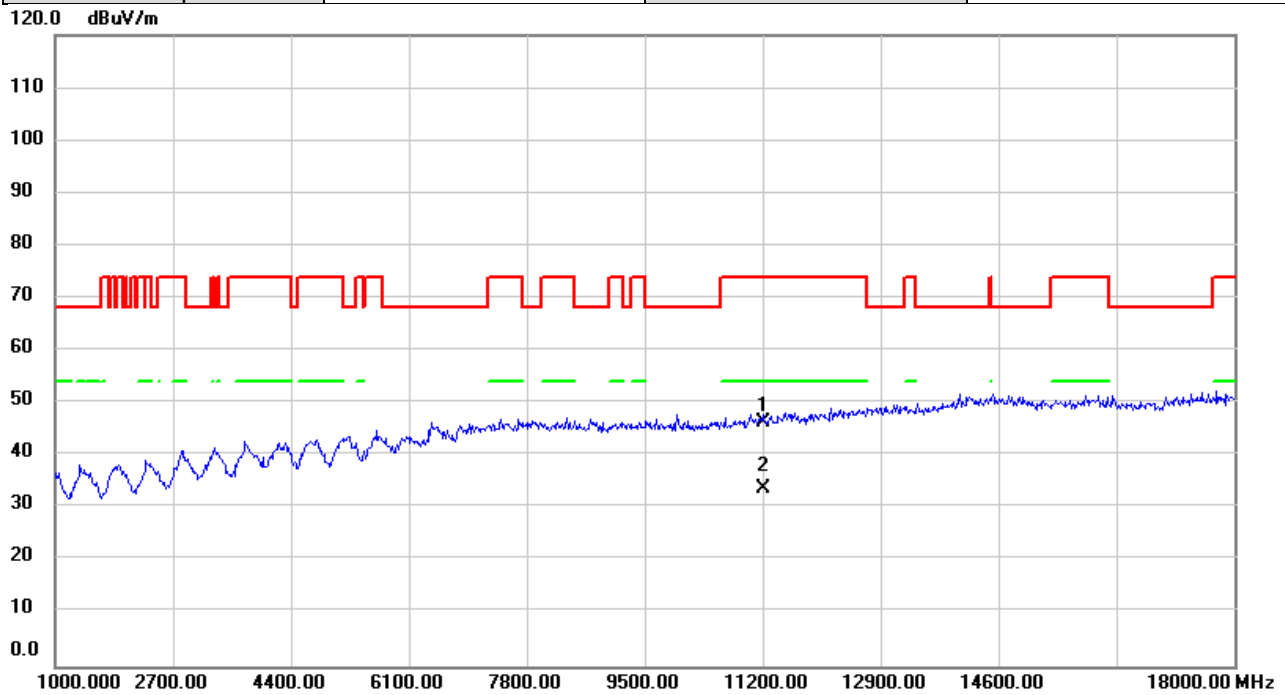


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11220.00	43.47	2.78	46.25	74.00	-27.75	peak	
2	*	11220.00	30.99	2.78	33.77	54.00	-20.23	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/29
Test Frequency	5610MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

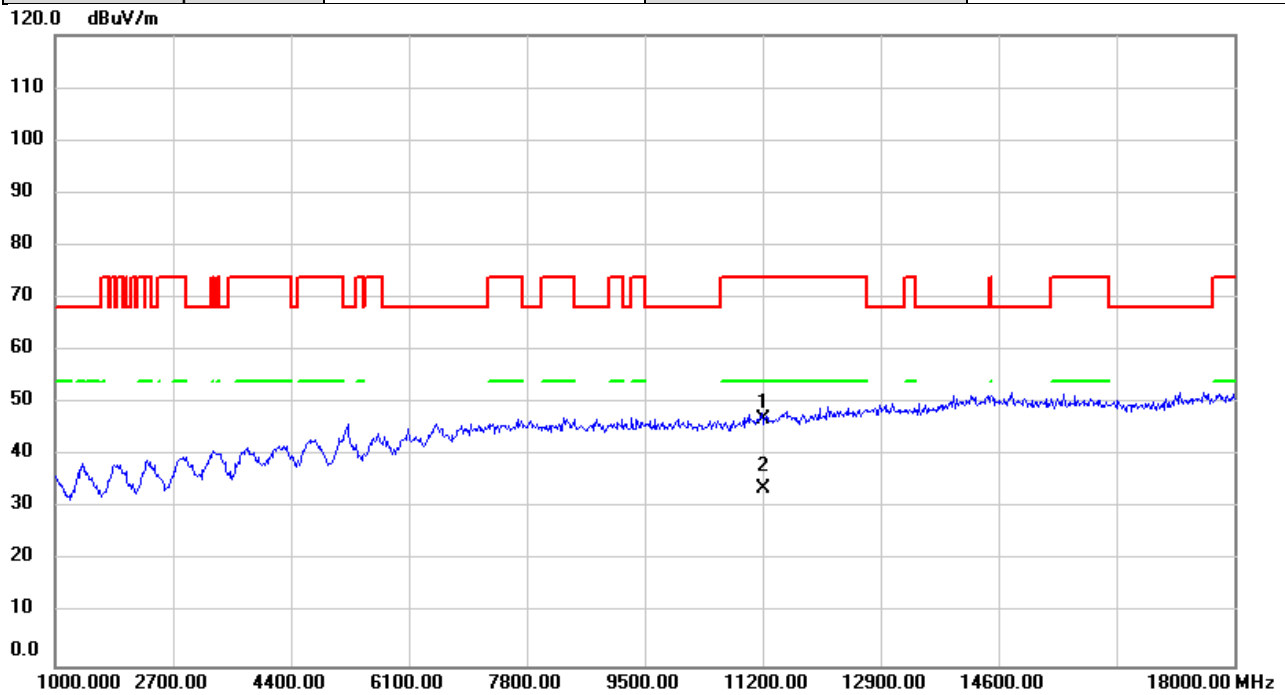


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11220.00	44.20	2.78	46.98	74.00	-27.02	peak	
2	*	11220.00	30.97	2.78	33.75	54.00	-20.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/29
Test Frequency	5690MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

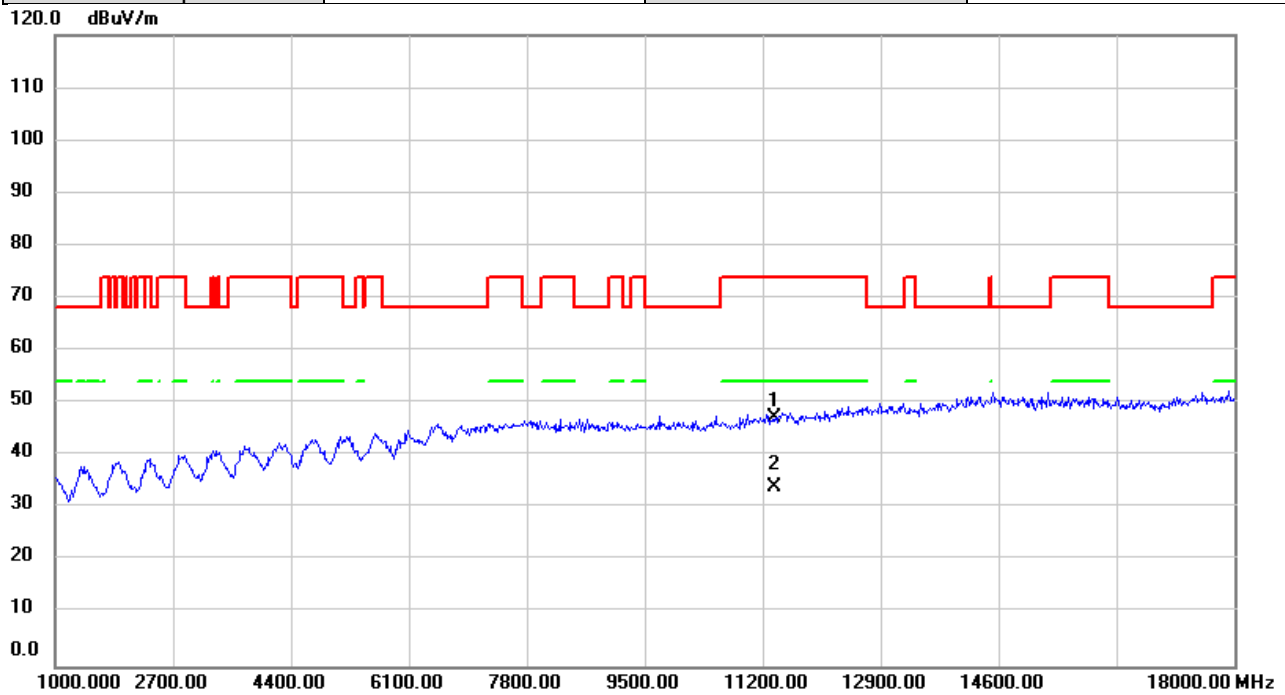


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11380.00	44.40	2.82	47.22	74.00	-26.78	peak	
2	*	11380.00	31.27	2.82	34.09	54.00	-19.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/29
Test Frequency	5690MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

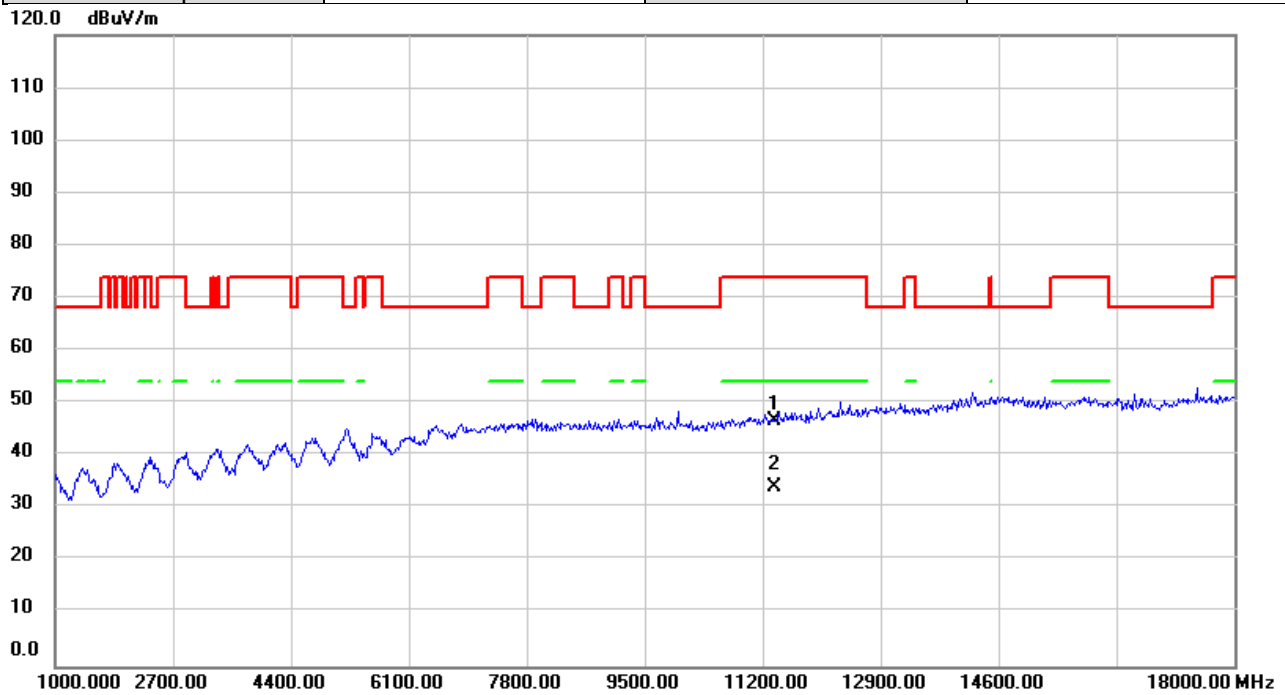


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11380.00	43.88	2.82	46.70	74.00	-27.30	peak	
2	*	11380.00	31.15	2.82	33.97	54.00	-20.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/29
Test Frequency	5775MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

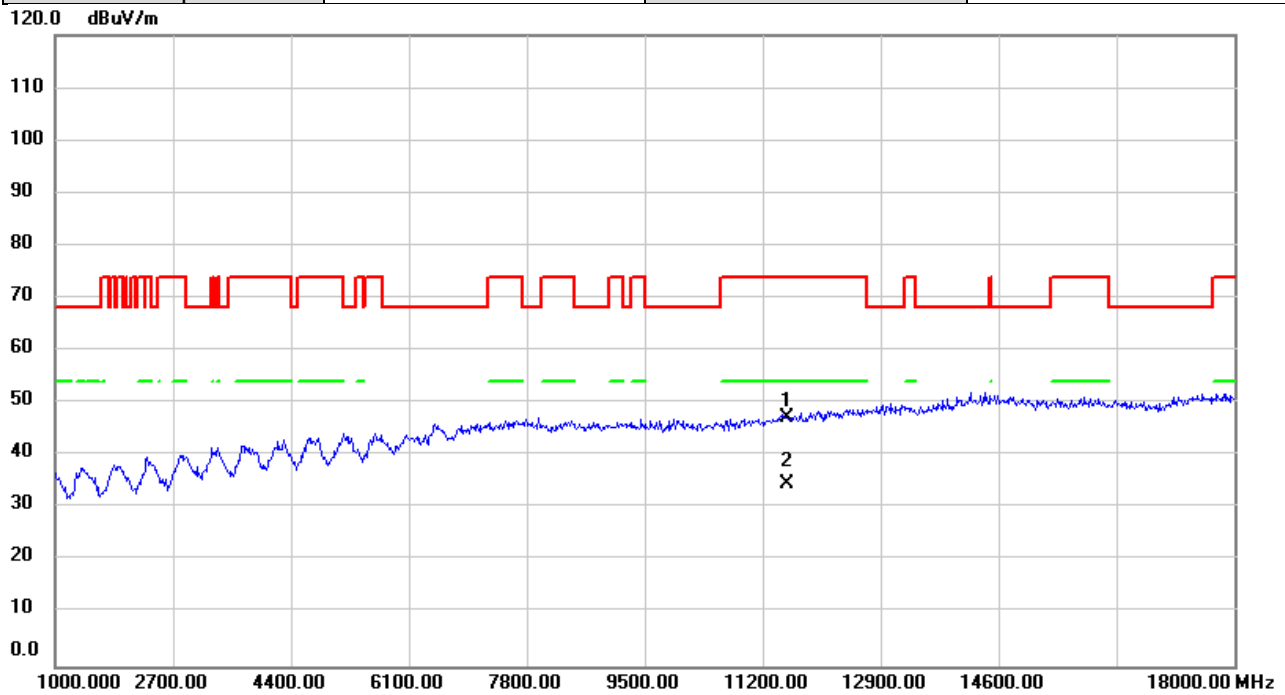


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	44.34	2.82	47.16	74.00	-26.84	peak	
2	*	11550.00	31.72	2.82	34.54	54.00	-19.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/12/29
Test Frequency	5775MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

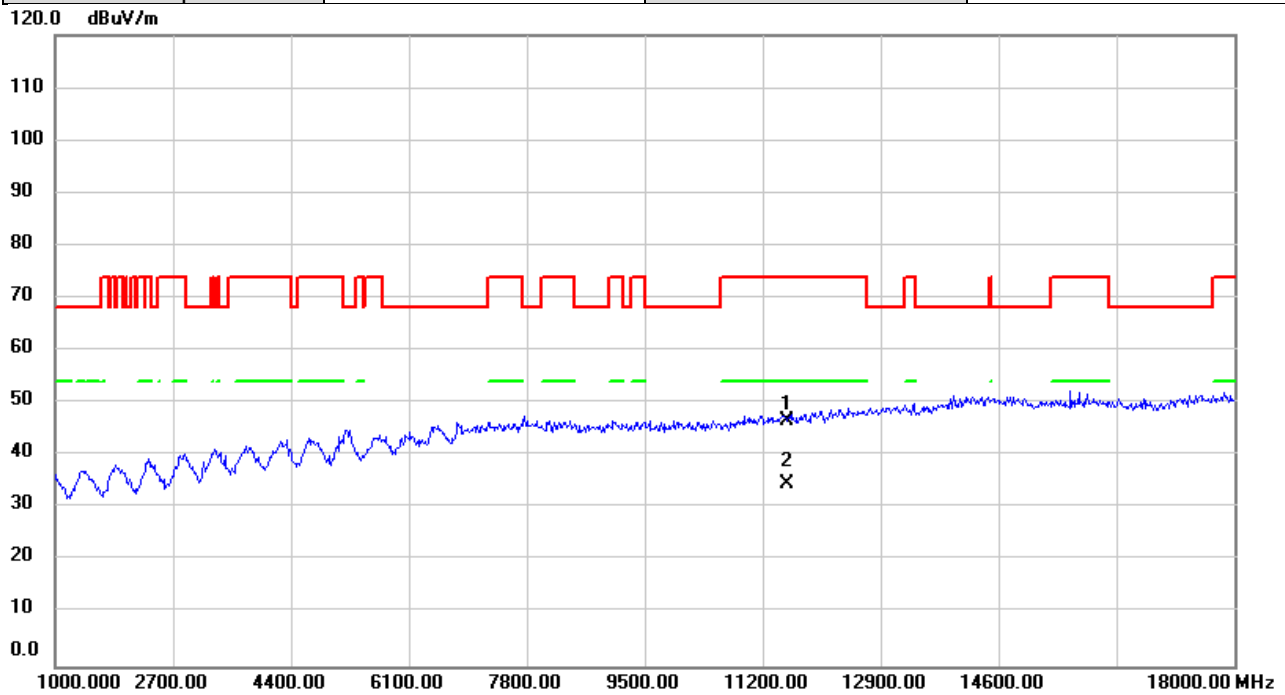


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	43.85	2.82	46.67	74.00	-27.33	peak	
2	*	11550.00	31.69	2.82	34.51	54.00	-19.49	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/12/29
Test Frequency	5250MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

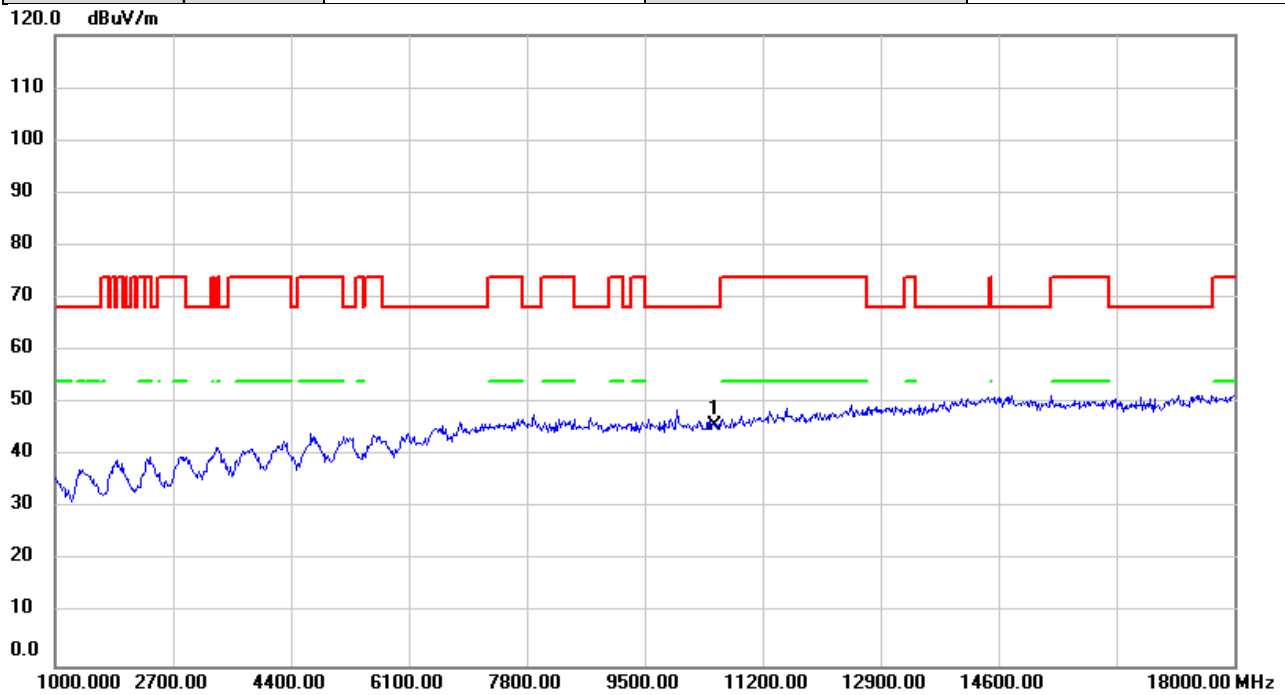


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10500.00	43.38	2.47	45.85	68.20	-22.35	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/12/29
Test Frequency	5250MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

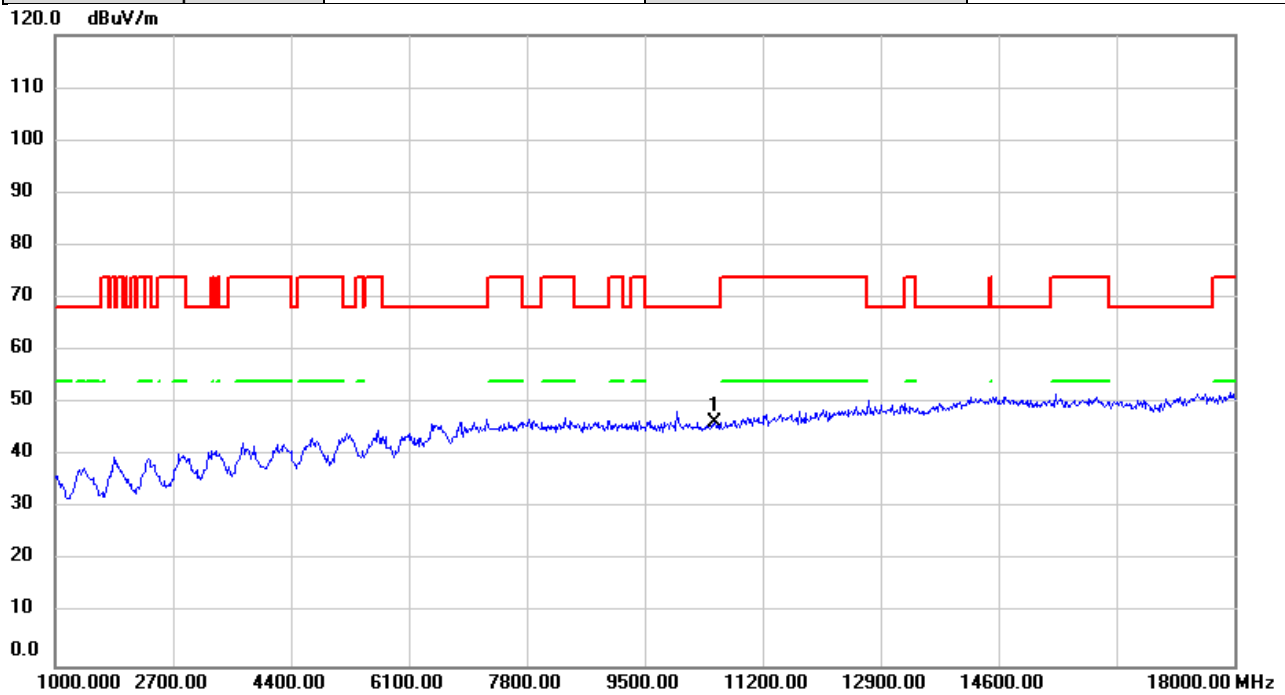


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10500.00	43.81	2.47	46.28	68.20	-21.92	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/12/29
Test Frequency	5570MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

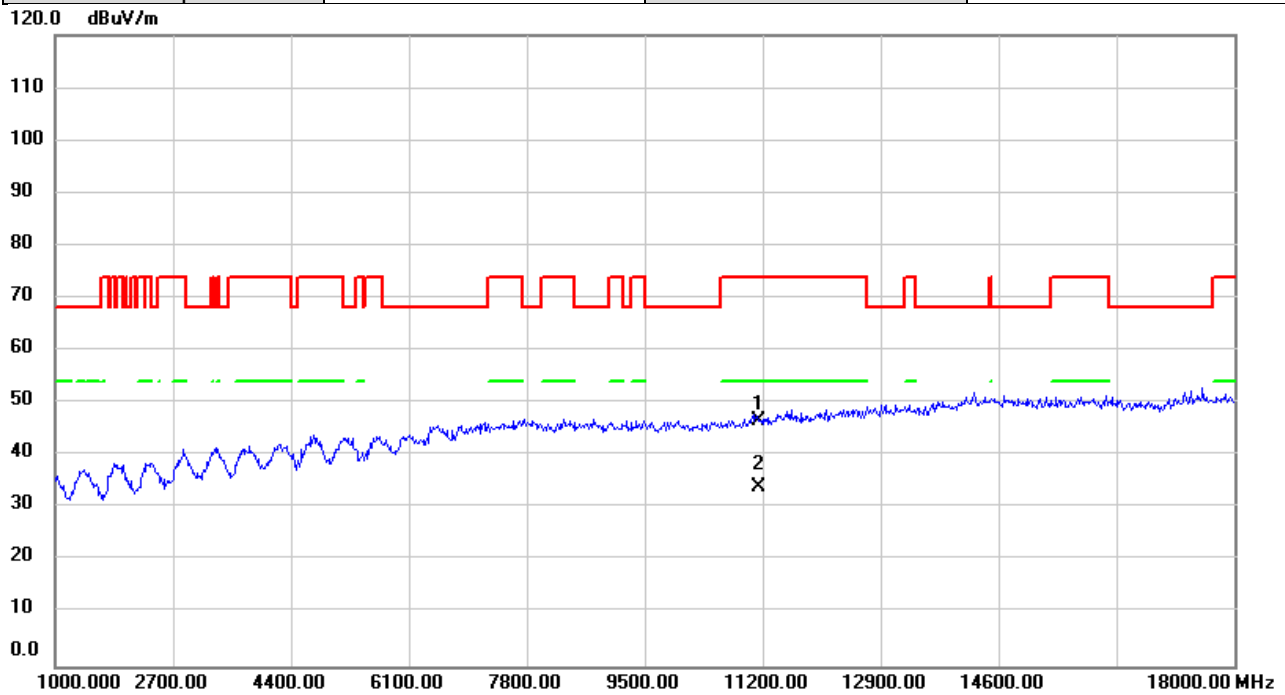


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11140.00	43.86	2.75	46.61	74.00	-27.39	peak	
2	*	11140.00	31.18	2.75	33.93	54.00	-20.07	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/12/29
Test Frequency	5570MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

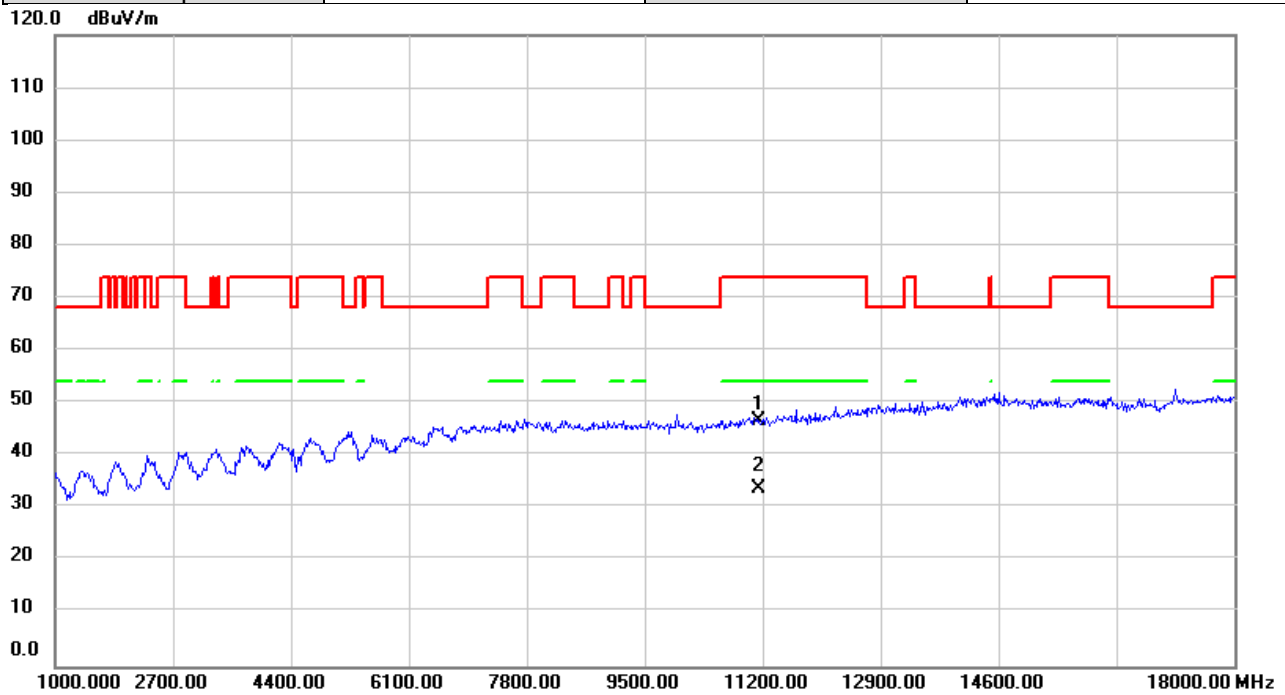


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11140.00	43.83	2.75	46.58	74.00	-27.42	peak	
2	*	11140.00	31.14	2.75	33.89	54.00	-20.11	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/30
Test Frequency	5180MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

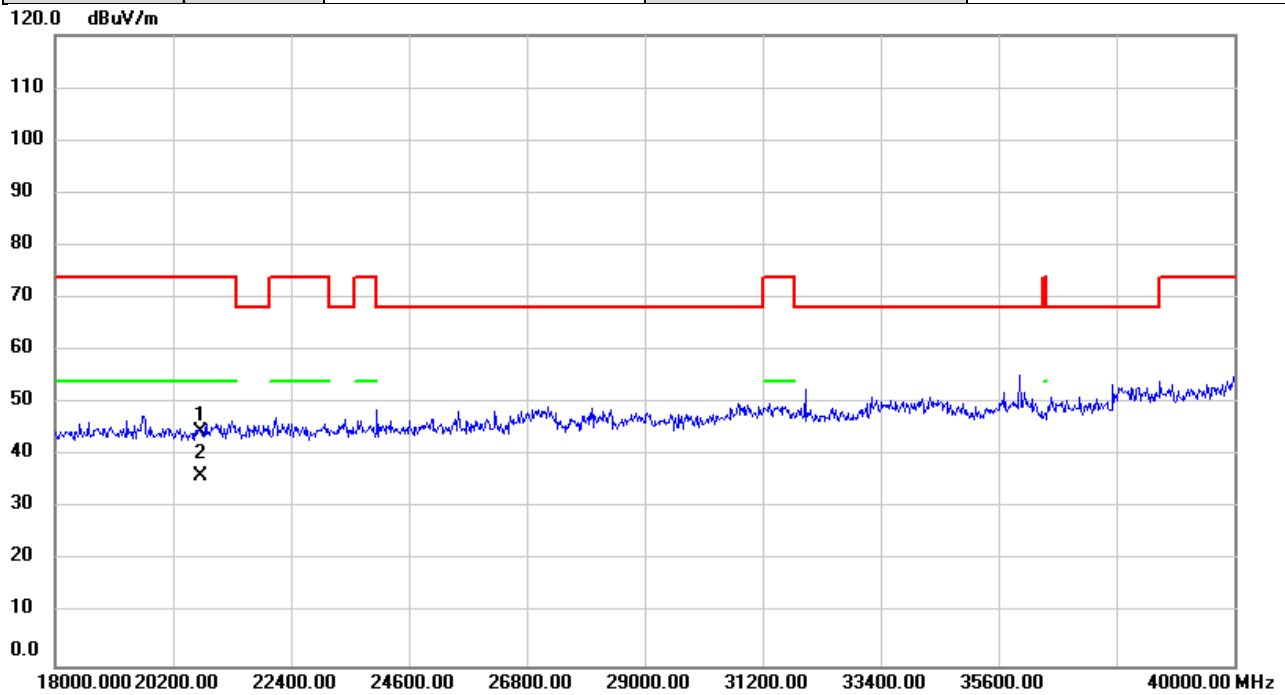


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		20720.00	53.38	-8.78	44.60	74.00	-29.40	peak	
2	*	20720.00	44.83	-8.78	36.05	54.00	-17.95	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/12/30
Test Frequency	5180MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

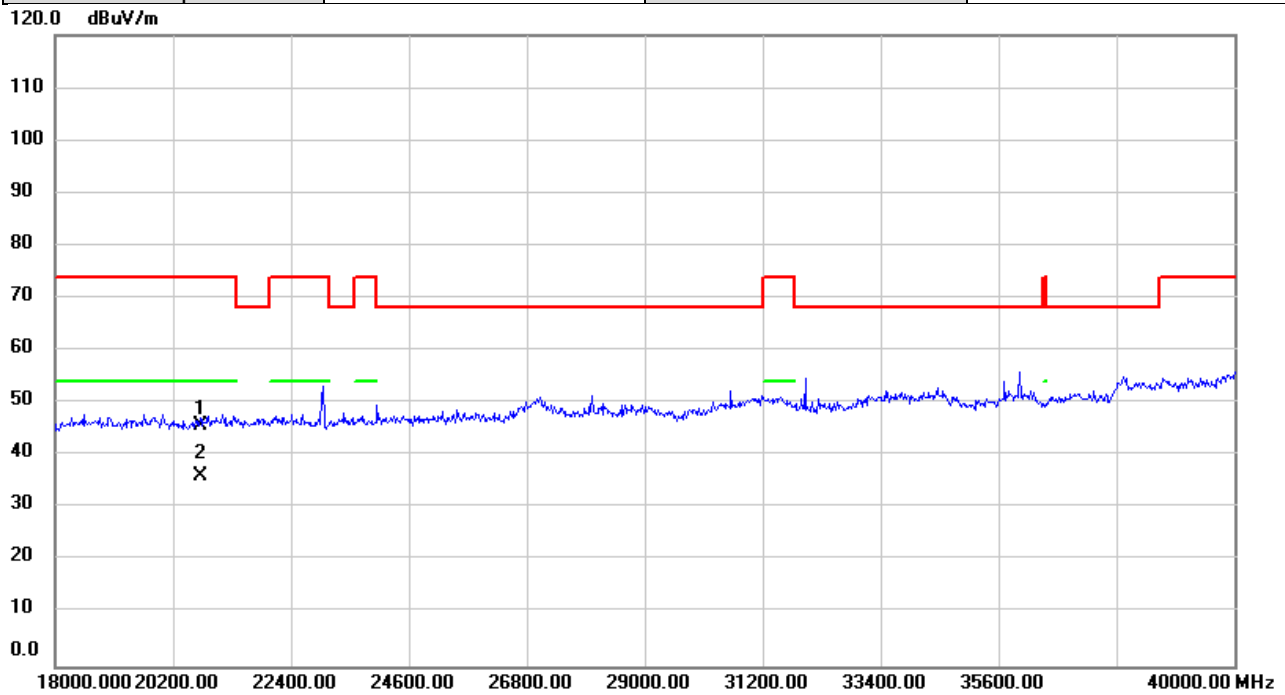

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		20720.00	54.63	-8.78	45.85	74.00	-28.15	peak	
2	*	20720.00	45.02	-8.78	36.24	54.00	-17.76	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E OUTPUT POWER

SISO mode:

Test Mode	IEEE 802.11a_ Ant. A	Tested Date	2025/11/18
-----------	----------------------	-------------	------------

Test Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
5180	13.90	0.0245	24.00	0.2512	Pass
5200	13.88	0.0244	24.00	0.2512	Pass
5240	13.90	0.0245	24.00	0.2512	Pass
5260	13.88	0.0244	24.00	0.2512	Pass
5280	13.88	0.0244	24.00	0.2512	Pass
5320	13.93	0.0247	24.00	0.2512	Pass
5500	13.28	0.0213	24.00	0.2512	Pass
5600	13.13	0.0206	24.00	0.2512	Pass
5700	13.27	0.0212	24.00	0.2512	Pass
5745	13.39	0.0218	30.00	1.0000	Pass
5785	13.24	0.0211	30.00	1.0000	Pass
5825	13.23	0.0210	30.00	1.0000	Pass

Test Mode	IEEE 802.11a_ Ant. B	Tested Date	2025/11/18
-----------	----------------------	-------------	------------

Test Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
5180	13.36	0.0217	24.00	0.2512	Pass
5200	13.35	0.0216	24.00	0.2512	Pass
5240	13.30	0.0214	24.00	0.2512	Pass
5260	13.27	0.0212	24.00	0.2512	Pass
5280	13.43	0.0220	24.00	0.2512	Pass
5320	13.35	0.0216	24.00	0.2512	Pass
5500	13.76	0.0238	24.00	0.2512	Pass
5600	13.76	0.0238	24.00	0.2512	Pass
5700	13.41	0.0219	24.00	0.2512	Pass
5745	13.51	0.0224	30.00	1.0000	Pass
5785	13.73	0.0236	30.00	1.0000	Pass
5825	13.59	0.0229	30.00	1.0000	Pass

MIMO mode:

Test Mode	IEEE 802.11n (HT20) _ Ant. A	Tested Date	2025/11/18
-----------	------------------------------	-------------	------------

Test Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
5180	12.97	0.0198	24.00	0.2512	Pass
5200	12.80	0.0191	24.00	0.2512	Pass
5240	12.69	0.0186	24.00	0.2512	Pass
5260	13.78	0.0239	24.00	0.2512	Pass
5280	13.83	0.0242	24.00	0.2512	Pass
5320	13.81	0.0240	24.00	0.2512	Pass
5500	13.31	0.0214	24.00	0.2512	Pass
5600	13.31	0.0214	24.00	0.2512	Pass
5700	13.30	0.0214	24.00	0.2512	Pass
5745	13.22	0.0210	30.00	1.0000	Pass
5785	13.16	0.0207	30.00	1.0000	Pass
5825	13.10	0.0204	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20) _ Ant. B	Tested Date	2025/11/18
-----------	------------------------------	-------------	------------

Test Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
5180	12.74	0.0188	24.00	0.2512	Pass
5200	12.79	0.0190	24.00	0.2512	Pass
5240	12.53	0.0179	24.00	0.2512	Pass
5260	13.29	0.0213	24.00	0.2512	Pass
5280	13.33	0.0215	24.00	0.2512	Pass
5320	13.26	0.0212	24.00	0.2512	Pass
5500	13.72	0.0236	24.00	0.2512	Pass
5600	13.70	0.0234	24.00	0.2512	Pass
5700	13.42	0.0220	24.00	0.2512	Pass
5745	13.87	0.0244	30.00	1.0000	Pass
5785	13.71	0.0235	30.00	1.0000	Pass
5825	13.58	0.0228	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20) _ Total	Tested Date	2025/11/18
-----------	-----------------------------	-------------	------------

Test Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
5180	15.87	0.0386	24.00	0.2512	Pass
5200	15.81	0.0381	24.00	0.2512	Pass
5240	15.62	0.0365	24.00	0.2512	Pass
5260	16.55	0.0452	24.00	0.2512	Pass
5280	16.60	0.0457	24.00	0.2512	Pass
5320	16.55	0.0452	24.00	0.2512	Pass
5500	16.53	0.0450	24.00	0.2512	Pass
5600	16.52	0.0449	24.00	0.2512	Pass
5700	16.37	0.0434	24.00	0.2512	Pass
5745	16.57	0.0454	30.00	1.0000	Pass
5785	16.45	0.0442	30.00	1.0000	Pass
5825	16.36	0.0432	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40) _ Ant. A	Tested Date	2025/11/18
-----------	------------------------------	-------------	------------

Test Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
5190	13.85	0.0243	24.00	0.2512	Pass
5230	12.88	0.0194	24.00	0.2512	Pass
5270	13.66	0.0232	24.00	0.2512	Pass
5310	13.59	0.0229	24.00	0.2512	Pass
5510	13.30	0.0214	24.00	0.2512	Pass
5590	13.26	0.0212	24.00	0.2512	Pass
5670	13.40	0.0219	24.00	0.2512	Pass
5755	13.09	0.0204	30.00	1.0000	Pass
5795	13.29	0.0213	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40) _ Ant. B	Tested Date	2025/11/18
-----------	------------------------------	-------------	------------

Test Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
5190	13.16	0.0207	24.00	0.2512	Pass
5230	12.84	0.0192	24.00	0.2512	Pass
5270	13.17	0.0207	24.00	0.2512	Pass
5310	13.29	0.0213	24.00	0.2512	Pass
5510	13.76	0.0238	24.00	0.2512	Pass
5590	13.74	0.0237	24.00	0.2512	Pass
5670	13.72	0.0236	24.00	0.2512	Pass
5755	13.66	0.0232	30.00	1.0000	Pass
5795	13.71	0.0235	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40) _ Total	Tested Date	2025/11/18
-----------	-----------------------------	-------------	------------

Test Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
5190	16.53	0.0450	24.00	0.2512	Pass
5230	15.87	0.0386	24.00	0.2512	Pass
5270	16.43	0.0440	24.00	0.2512	Pass
5310	16.45	0.0442	24.00	0.2512	Pass
5510	16.55	0.0451	24.00	0.2512	Pass
5590	16.52	0.0448	24.00	0.2512	Pass
5670	16.57	0.0454	24.00	0.2512	Pass
5755	16.39	0.0436	30.00	1.0000	Pass
5795	16.52	0.0448	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80) _ Ant. A	Tested Date	2025/11/18
-----------	--------------------------------	-------------	------------

Test Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
5210	13.71	0.0235	24.00	0.2512	Pass
5290	13.77	0.0238	24.00	0.2512	Pass
5530	13.43	0.0220	24.00	0.2512	Pass
5610	13.44	0.0221	24.00	0.2512	Pass
5775	13.33	0.0215	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80) _ Ant. B	Tested Date	2025/11/18
-----------	--------------------------------	-------------	------------

Test Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
5210	13.33	0.0215	24.00	0.2512	Pass
5290	13.41	0.0219	24.00	0.2512	Pass
5530	13.86	0.0243	24.00	0.2512	Pass
5610	13.65	0.0232	24.00	0.2512	Pass
5775	13.67	0.0233	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80) _ Total	Tested Date	2025/11/18
-----------	-------------------------------	-------------	------------

Test Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
5210	16.53	0.0450	24.00	0.2512	Pass
5290	16.60	0.0458	24.00	0.2512	Pass
5530	16.66	0.0464	24.00	0.2512	Pass
5610	16.56	0.0453	24.00	0.2512	Pass
5775	16.51	0.0448	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT160) _ Ant. A	Tested Date	2025/11/18
-----------	---------------------------------	-------------	------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5250	13.76	0.0238	24.00	0.2512	Pass
5570	13.24	0.0211	24.00	0.2512	Pass

Test Mode	IEEE 802.11ac (VHT160) _ Ant. B	Tested Date	2025/11/18
-----------	---------------------------------	-------------	------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5250	13.31	0.0214	24.00	0.2512	Pass
5570	13.79	0.0239	24.00	0.2512	Pass

Test Mode	IEEE 802.11ac (VHT160) _ Total	Tested Date	2025/11/18
-----------	--------------------------------	-------------	------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5250	16.55	0.0452	24.00	0.2512	Pass
5570	16.53	0.0450	24.00	0.2512	Pass

Test Mode	IEEE 802.11ax (HE20) _ Ant. A	Tested Date	2025/11/18
-----------	-------------------------------	-------------	------------

Test Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
5180	13.07	0.0203	24.00	0.2512	Pass
5200	13.04	0.0201	24.00	0.2512	Pass
5240	13.11	0.0205	24.00	0.2512	Pass
5260	13.89	0.0245	24.00	0.2512	Pass
5280	13.62	0.0230	24.00	0.2512	Pass
5320	13.75	0.0237	24.00	0.2512	Pass
5500	13.36	0.0217	24.00	0.2512	Pass
5600	13.33	0.0215	24.00	0.2512	Pass
5700	13.38	0.0218	24.00	0.2512	Pass
5745	13.28	0.0213	30.00	1.0000	Pass
5785	13.24	0.0211	30.00	1.0000	Pass
5825	13.25	0.0211	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HE20) _ Ant. B	Tested Date	2025/11/18
-----------	-------------------------------	-------------	------------

Test Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
5180	12.78	0.0190	24.00	0.2512	Pass
5200	12.88	0.0194	24.00	0.2512	Pass
5240	12.86	0.0193	24.00	0.2512	Pass
5260	13.11	0.0205	24.00	0.2512	Pass
5280	13.34	0.0216	24.00	0.2512	Pass
5320	13.34	0.0216	24.00	0.2512	Pass
5500	13.66	0.0232	24.00	0.2512	Pass
5600	13.60	0.0229	24.00	0.2512	Pass
5700	13.77	0.0238	24.00	0.2512	Pass
5745	13.78	0.0239	30.00	1.0000	Pass
5785	13.80	0.0240	30.00	1.0000	Pass
5825	13.68	0.0233	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HE20) _ Total	Tested Date	2025/11/18
-----------	------------------------------	-------------	------------

Test Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
5180	15.94	0.0392	24.00	0.2512	Pass
5200	15.97	0.0395	24.00	0.2512	Pass
5240	16.00	0.0398	24.00	0.2512	Pass
5260	16.53	0.0450	24.00	0.2512	Pass
5280	16.49	0.0446	24.00	0.2512	Pass
5320	16.56	0.0453	24.00	0.2512	Pass
5500	16.52	0.0449	24.00	0.2512	Pass
5600	16.48	0.0444	24.00	0.2512	Pass
5700	16.59	0.0456	24.00	0.2512	Pass
5745	16.55	0.0452	30.00	1.0000	Pass
5785	16.54	0.0451	30.00	1.0000	Pass
5825	16.48	0.0445	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HE40) _ Ant. A	Tested Date	2025/11/18
-----------	-------------------------------	-------------	------------

Test Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
5190	13.77	0.0238	24.00	0.2512	Pass
5230	12.71	0.0187	24.00	0.2512	Pass
5270	13.74	0.0237	24.00	0.2512	Pass
5310	13.86	0.0243	24.00	0.2512	Pass
5510	13.19	0.0208	24.00	0.2512	Pass
5590	13.05	0.0202	24.00	0.2512	Pass
5670	13.32	0.0215	24.00	0.2512	Pass
5755	13.15	0.0207	30.00	1.0000	Pass
5795	13.26	0.0212	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HE40) _ Ant. B	Tested Date	2025/11/18
-----------	-------------------------------	-------------	------------

Test Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
5190	13.20	0.0209	24.00	0.2512	Pass
5230	12.66	0.0185	24.00	0.2512	Pass
5270	13.25	0.0211	24.00	0.2512	Pass
5310	13.22	0.0210	24.00	0.2512	Pass
5510	13.72	0.0236	24.00	0.2512	Pass
5590	13.60	0.0229	24.00	0.2512	Pass
5670	13.65	0.0232	24.00	0.2512	Pass
5755	13.61	0.0230	30.00	1.0000	Pass
5795	13.68	0.0233	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HE40) _ Total	Tested Date	2025/11/18
-----------	------------------------------	-------------	------------

Test Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
5190	16.50	0.0447	24.00	0.2512	Pass
5230	15.70	0.0371	24.00	0.2512	Pass
5270	16.51	0.0448	24.00	0.2512	Pass
5310	16.56	0.0453	24.00	0.2512	Pass
5510	16.47	0.0444	24.00	0.2512	Pass
5590	16.34	0.0431	24.00	0.2512	Pass
5670	16.50	0.0447	24.00	0.2512	Pass
5755	16.40	0.0436	30.00	1.0000	Pass
5795	16.49	0.0445	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HE80) _ Ant. A	Tested Date	2025/11/18
-----------	-------------------------------	-------------	------------

Test Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
5210	12.75	0.0188	24.00	0.2512	Pass
5290	13.69	0.0234	24.00	0.2512	Pass
5530	13.40	0.0219	24.00	0.2512	Pass
5610	13.43	0.0220	24.00	0.2512	Pass
5775	13.31	0.0214	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HE80) _ Ant. B	Tested Date	2025/11/18
-----------	-------------------------------	-------------	------------

Test Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
5210	12.61	0.0182	24.00	0.2512	Pass
5290	13.37	0.0217	24.00	0.2512	Pass
5530	13.68	0.0233	24.00	0.2512	Pass
5610	13.70	0.0234	24.00	0.2512	Pass
5775	13.74	0.0237	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HE80) _ Total	Tested Date	2025/11/18
-----------	------------------------------	-------------	------------

Test Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Test Result
5210	15.69	0.0371	24.00	0.2512	Pass
5290	16.54	0.0451	24.00	0.2512	Pass
5530	16.55	0.0452	24.00	0.2512	Pass
5610	16.58	0.0455	24.00	0.2512	Pass
5775	16.54	0.0451	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HE160) _ Ant. A	Tested Date	2025/11/18
-----------	--------------------------------	-------------	------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5250	13.70	0.0234	24.00	0.2512	Pass
5570	13.30	0.0214	24.00	0.2512	Pass

Test Mode	IEEE 802.11ax (HE160) _ Ant. B	Tested Date	2025/11/18
-----------	--------------------------------	-------------	------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5250	13.26	0.0212	24.00	0.2512	Pass
5570	13.67	0.0233	24.00	0.2512	Pass

Test Mode	IEEE 802.11ax (HE160) _ Total	Tested Date	2025/11/18
-----------	-------------------------------	-------------	------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5250	16.50	0.0446	24.00	0.2512	Pass
5570	16.50	0.0447	24.00	0.2512	Pass

For Straddle Channel:

Test Mode	IEEE 802.11n (HT20) _ Ant. A	Tested Date	2025/11/18
-----------	------------------------------	-------------	------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5720	13.40	0.0219	24.00	0.2512	Pass
5720	6.40	0.0044	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20) _ Ant. B	Tested Date	2025/11/18
-----------	------------------------------	-------------	------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5720	13.80	0.0240	24.00	0.2512	Pass
5720	6.21	0.0042	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT20)_Total	Tested Date	2025/11/18
-----------	---------------------------	-------------	------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5720	16.61	0.0459	24.00	0.2512	Pass
5720	9.32	0.0085	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40) _ Ant. A	Tested Date	2025/11/18
-----------	------------------------------	-------------	------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5710	13.41	0.0219	24.00	0.2512	Pass
5710	1.63	0.0015	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40) _ Ant. B	Tested Date	2025/11/18
-----------	------------------------------	-------------	------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5710	13.90	0.0245	24.00	0.2512	Pass
5710	1.16	0.0013	30.00	1.0000	Pass

Test Mode	IEEE 802.11n (HT40)_Total	Tested Date	2025/11/18
-----------	---------------------------	-------------	------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5710	16.67	0.0465	24.00	0.2512	Pass
5710	4.41	0.0028	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80) _ Ant. A	Tested Date	2025/11/18
-----------	--------------------------------	-------------	------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5690	13.43	0.0220	24.00	0.2512	Pass
5690	-3.01	0.0005	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80) _ Ant. B	Tested Date	2025/11/18
-----------	--------------------------------	-------------	------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5690	13.78	0.0239	24.00	0.2512	Pass
5690	-3.21	0.0005	30.00	1.0000	Pass

Test Mode	IEEE 802.11ac (VHT80)_Total	Tested Date	2025/11/18
-----------	-----------------------------	-------------	------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5690	16.62	0.0459	24.00	0.2512	Pass
5690	-0.10	0.0010	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HE20) _ Ant. A	Tested Date	2025/11/18
-----------	-------------------------------	-------------	------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5720	13.41	0.0219	24.00	0.2512	Pass
5720	6.82	0.0048	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HE20) _ Ant. B	Tested Date	2025/11/18
-----------	-------------------------------	-------------	------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5720	13.93	0.0247	24.00	0.2512	Pass
5720	6.83	0.0048	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HE20)_Total	Tested Date	2025/11/18
-----------	----------------------------	-------------	------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5720	16.69	0.0466	24.00	0.2512	Pass
5720	9.84	0.0096	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HE40) _ Ant. A	Tested Date	2025/11/18
-----------	-------------------------------	-------------	------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5710	13.37	0.0217	24.00	0.2512	Pass
5710	1.94	0.0016	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HE40) _ Ant. B	Tested Date	2025/11/18
-----------	-------------------------------	-------------	------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5710	13.68	0.0233	24.00	0.2512	Pass
5710	1.62	0.0015	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HE40)_Total	Tested Date	2025/11/18
-----------	----------------------------	-------------	------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5710	16.54	0.0451	24.00	0.2512	Pass
5710	4.79	0.0030	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HE80) _ Ant. A	Tested Date	2025/11/18
-----------	-------------------------------	-------------	------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5690	13.43	0.0220	24.00	0.2512	Pass
5690	-2.39	0.0006	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HE80) _ Ant. B	Tested Date	2025/11/18
-----------	-------------------------------	-------------	------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5690	13.67	0.0233	24.00	0.2512	Pass
5690	-2.63	0.0005	30.00	1.0000	Pass

Test Mode	IEEE 802.11ax (HE80)_Total	Tested Date	2025/11/18
-----------	----------------------------	-------------	------------

Frequency (MHz)	Average Power (dBm)	Average Power (W)	Power Limit (dBm)	Power Limit (W)	Result
5690	16.56	0.0453	24.00	0.2512	Pass
5690	0.50	0.0011	30.00	1.0000	Pass

End of Test Report