

TEST REPORT

Application No.: KSCR2601000248AT
FCC ID: M82-UTK3000RC
Applicant: Advantech Co.,Ltd.
Address of Applicant: No.1,Alley 20,Lane 26,Rueiguang Road, Neihs District, Taipei 114, Taiwan, China
Manufacturer: Advantech Co.,Ltd.
Address of Manufacturer: No.1,Alley 20,Lane 26,Rueiguang Road, Neihs District, Taipei 114, Taiwan, China
Factory: 1.Advantech Technology(CHINA) Co.,Ltd
2.BEIJING YAN HUA XING YE ELECTRONIC SCIENCE & TECHNOLOGY CO.,LTD
3.Advantech Corp.
4.ADVANTECH EUROPE B.V.
5.ADVANTECH CO.,LTD.
Address of Factory: 1.600 Han-Pu Rd Yushan Town Kunshan Jiangsu 215316 CHINA
2.7,6Th St, Shang Di Zone, Haidian District, Beijing 100085, China
3. 380 Fairview Way, Milpitas CA 95035. USA
4. Science Park Eindhoven 5708 Ekkersrijt 5692 ER Son, The Netherlands
5. No.27-3, Wende Rd.,Guishan Dist.,Taoyuan City 333, Taiwan
Equipment Under Test (EUT):
EUT Name: Self-service terminal
Model No.: UTK-3000;UTK-3XXXXXXXXXXXXXXXXX;
UTK3XXXXXXXXXXXXXXXXX
(X=0-9, A-Z, a-z, "." or blank, indicating different sales regions, the change of X does not affect the safety performance and EMC performance of the product.) ♣
♣ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Standard(s) : 47 CFR Part 15, Subpart E 15.407
Date of Receipt: 2026-01-27
Date of Test: 2026-05-10 to 2026-05-30
Date of Issue: 2026-08-12

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Revision Record			
Version	Description	Date	Remark
00	Original	2026-08-12	/

Authorized for issue by:			
Tested By			
		Eric_Liu/Project Engineer	
Approved By			
		Terry Hou /Reviewer	

2 Test Summary

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart E 15.407	ANSI C63.10-2020+Cor 1-2023 Section 6.2	47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)	Pass
Radiated Emissions (Below 1GHz)		ANSI C63.10-2020+Cor 1-2023 Section 6.4,6.5	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions (Above 1GHz)		ANSI C63.10-2020+Cor 1-2023 Section 6.6 & 12.7	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10-2020+Cor 1-2023 Section 6.10.5 & 12.7.2	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass

Model No.: UTK-3000;UTK-3XXXXXXXXXXXXXXXXXX;

UTK3XXXXXXXXXXXXXXXXXX

(X=0-9, A-Z, a-z, "." or blank, indicating different sales regions, the change of X does not affect the safety performance and EMC performance of the product.)

Only the model UTK-3000 was tested.

Note1: There are series models mentioned in this report, and they are identical in electrical and electronic characters. Only the model UTK-3000 was tested since their differences were the model number and whether there is a camera and LED do not affect the RF performance.

Note2: This host product using a certified module (FCC ID: 2AATL-6252C-PUB). The host integrator declares that they have followed the integration instructions provided by the module manufacturer and ensures that the end product complies with the FCC requirements by a technical evaluation to include the FCC Rules and KDB Publication 996369. In this report, the testing is performed with the host product configured in typical operational modes to check the spurious emissions for compliance with all the applicable rules, other test data please refer to original module test report No.

A2208103-C01-R10, A2208103-C01-R11.

Note3: Conducted output power and tested in agreement with the original project, so it is a direct reference to the original project data. This report evaluates Conducted Emissions at AC Power Line (150kHz-30MHz), Radiated Emissions which fall in the restricted bands and Radiated Spurious Emissions, other test data please refer to original project data.

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary	3
3 Contents.....	4
4 General Information.....	5
4.1 Details of E.U.T.	5
4.2 Description of Support Units	5
4.3 Measurement Uncertainty	6
4.4 Test Location	7
4.5 Test Facility	7
4.6 Deviation from Standards.....	8
4.7 Abnormalities from Standard Conditions.....	8
5 Equipment List	9
6 Radio Spectrum Matter Test Results	10
6.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	10
6.2 Radiated Emissions (Below 1GHz)	14
6.3 Radiated Emissions (Above 1GHz).....	19
6.4 Radiated Emissions which fall in the restricted bands	150
7 Test Setup Photo	283
8 EUT Constructional Details (EUT Photos).....	283

4 General Information

4.1 Details of E.U.T.

Test Voltage:	Pre-test AC 120V/50-60Hz&AC 240V/50-60Hz then choose the AC 120V/60Hz as worst case
Power supply:	Host Adapter: FSP120-AHAN3 Input: 100-240V~ 50/60Hz 2.0A Output: 12.0V 10.0A 120.0W Printer Adapter: AP152G-240200 Input: 100-240V~ 50/60Hz 2.0A Max Output: 24.0V 2.0A 48.0W
Operation Frequency/Number of channels (20MHz):	U-NII-1: 5180-5240MHz (4 Channels); U-NII-2A: 5260-5320MHz (4 Channels); U-NII-2C: 5500-5700MHz (11 Channels); U-NII-3: 5745-5825MHz (5 Channels)
Operation Frequency/Number of channels/(40MHz):	U-NII-1: 5190-5230MHz (2 Channels); U-NII-2A: 5270-5310MHz (2 Channels); U-NII-2C: 5510-5670MHz (5 Channels); U-NII-3: 5755-5795MHz (2 Channels)
Operation Frequency/Number of channels (80MHz):	U-NII-1: 5210MHz (1 Channel); U-NII-2A: 5290MHz (1 Channels); U-NII-2C: 5530-5610MHz (2 Channels); U-NII-3: 5775MHz (1 Channel)
Modulation Type:	802.11a: OFDM (BPSK, QPSK, 16QAM, 64QAM); 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM); 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM); 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
Channel Spacing:	802.11a/n/ac/ax 20: 20MHz; 802.11n/ac/ax 40: 40MHz; 802.11ac/ax 80: 80MHz
DFS Function:	Slave without Radar detection
TPC Function:	Support TPC function
Antenna Type:	Dipole Antenna
Antenna Gain:	2.79dBi (Provided by the manufacturer)

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Notebook	LENOVO	K27	EB24537645

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	Conduction emission	$\pm 3.0\text{dB}$ (150kHz to 30MHz)
5	RF conducted power	$\pm 0.75\text{dB}$
6	RF power density	$\pm 2.84\text{dB}$
7	Conducted Spurious emissions	$\pm 0.75\text{dB}$
8	RF Radiated power	$\pm 1.56\text{dB}$ (9KHz-30MHz)
		$\pm 4.80\text{dB}$ (30MHz-1GHz)
		$\pm 4.80\text{dB}$ (1GHz-18GHz)
		$\pm 4.80\text{dB}$ (18GHz-40GHz)
9	Temperature test	$\pm 1^\circ\text{C}$
10	Humidity test	$\pm 3\%$
11	Supply voltages	$\pm 1\%$
12	Time	$\pm 3\%$
Remark: The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.		

4.4 Test Location

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

Test Lab:

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu)
Pilot Free Trade Zone

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA (Certificate No. 2541.01)**

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA).

• **FCC (Designation Number: CN1172)**

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory.

• **ISED (CAB Identifier: CN0072)**

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 2324E

• **VCCI (Member No:1938)**

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

Test Lab:

• **A2LA (Certificate No. 6336.01)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA).

• **FCC (Designation Number: CN1312)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized as an accredited testing laboratory. Test Firm Registration Number: 717327

• **ISED (CAB Identifier: CN0120)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 27594



Report No.: KSCR260100024804

Page: 8 of 283

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

5 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
Conducted Emission at Mains Terminals						
1	EMI Test Receive	R&S	ESR7	SUWI-01-10-01	2026/1/14	2027/1/13
2	LISN	R&S	ENV216	SUWI-01-19-03	2026/4/22	2027/4/21
3	LISN	Schwarzbeck	ENV216	SUWI-01-19-04	2026/4/22	2027/4/21
4	Test Software	Tonscend	JS32-CE_4.0.0.2	SUWI-02-09-05	N.C.R	N.C.R
5	Test Cable	Tonscend	NA	SUWI-01-03-04	2026/4/22	2027/4/21
RF Radiated Test						
1	Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	2023/6/3	2026/6/2
2	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2026/1/14	2027/1/13
3	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-09	2025/11/21	2026/11/20
4	Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2026/1/14	2027/1/13
5	Signal Generator	ROHDE&SCHWARZ	SMW100A	SUWI-01-18-01	2026/1/14	2027/1/13
6	Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9168	SUWI-01-11-04	2025/9/10	2027/9/9
7	Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	2025/5/7	2027/5/6
8	Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9170	SUWI-01-11-03	2025/5/7	2027/5/6
9	Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	2025/5/7	2027/5/6
10	Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	2026/1/14	2027/1/13
11	Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	2026/1/14	2027/1/13
12	Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	2026/1/14	2027/1/13
13	Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-26-01	2025/11/21	2026/11/20
14	Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	2025/8/25	2026/8/24
15	Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-09	2025/8/26	2026/8/25
16	Radio Communication Analyzer	StarPoint	SP9500E	SUWI-01-28-02	2025/11/21	2026/11/20
17	Signal Generator	ROHDE&SCHWARZ	SMB100A	SUWI-01-08-01	2026/1/14	2027/1/13
18	DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	2026/1/14	2027/1/13
19	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2026/2/11	2027/2/10
20	Measurement Software	Tonscend	JS32-RE 4.0.0.0	SUWI-02-09-06	NCR	NCR
21	RF Control unit	Tonscend	JS0806-1	SUWI-02-20-01	NCR	NCR
22	RF Cables	Tonscend	NA	SUWI-01-03-02	2026/1/15	2027/1/14

6 Radio Spectrum Matter Test Results

6.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)

Test Method: ANSI C63.10-2020+Cor 1-2023 Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		

6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C


Humidity: 50.2 % RH

Atmospheric Pressure: 1010 mbar

6.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Pre-scan	05	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Pre-scan	06	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Pre-scan	07	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.

6.1.3 Test Setup Diagram

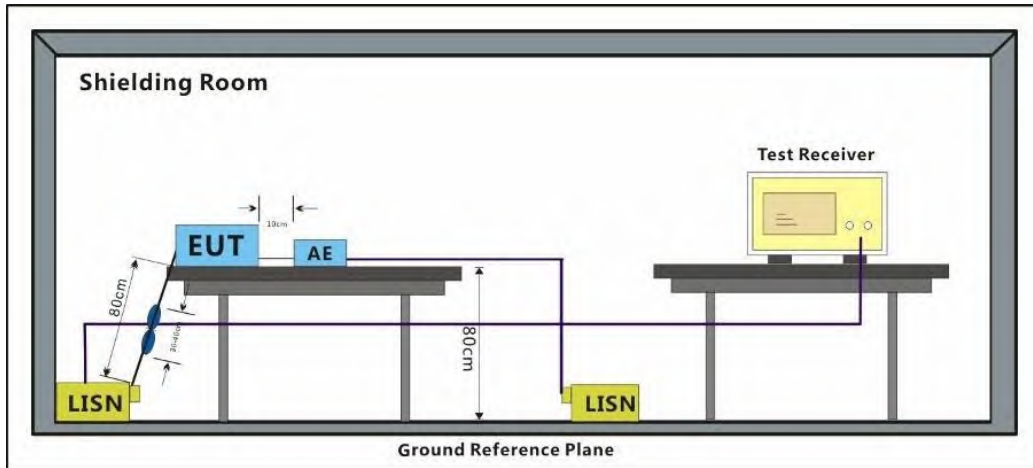

6.1.4 Measurement Procedure and Data


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 50\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{LISN Factor}$

Remark 2: Pre-test AC 120V/50-60Hz & AC 240V/50-60Hz then choose the AC 120/60Hz as worst case.




Test Mode: 00; Line: Neutral Line

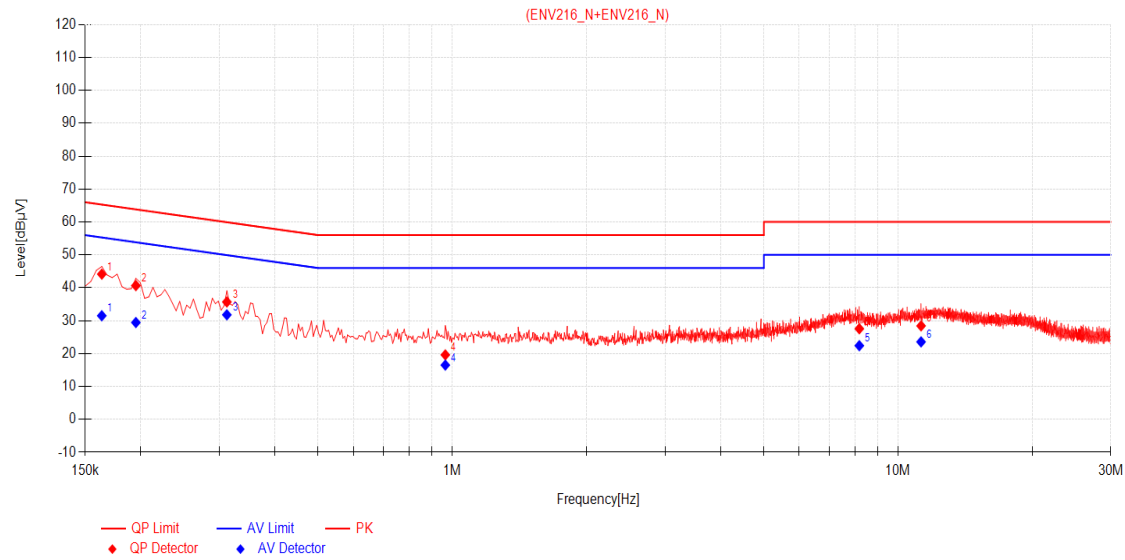

Final Data List											
NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBuV]	QP Value [dBuV]	QP Limit [dBuV]	QP Margin [dB]	AV Reading [dBuV]	AV Value [dBuV]	AV Limit [dBuV]	AV Margin [dB]	Verdict
1	0.1635	9.95	34.19	44.14	65.28	21.14	21.55	31.50	55.28	23.78	PASS
2	0.1950	9.97	30.70	40.67	63.82	23.15	19.47	29.44	53.82	24.38	PASS
3	0.3120	9.97	25.72	35.69	59.92	24.23	21.81	31.78	49.92	18.14	PASS
4	0.9645	9.91	9.69	19.60	56.00	36.40	6.60	16.51	46.00	29.49	PASS
5	8.1870	10.36	17.18	27.54	60.00	32.46	12.05	22.41	50.00	27.59	PASS
6	11.2650	10.54	17.88	28.42	60.00	31.58	13.02	23.56	50.00	26.44	PASS



Test Mode: 00; Line: Live line

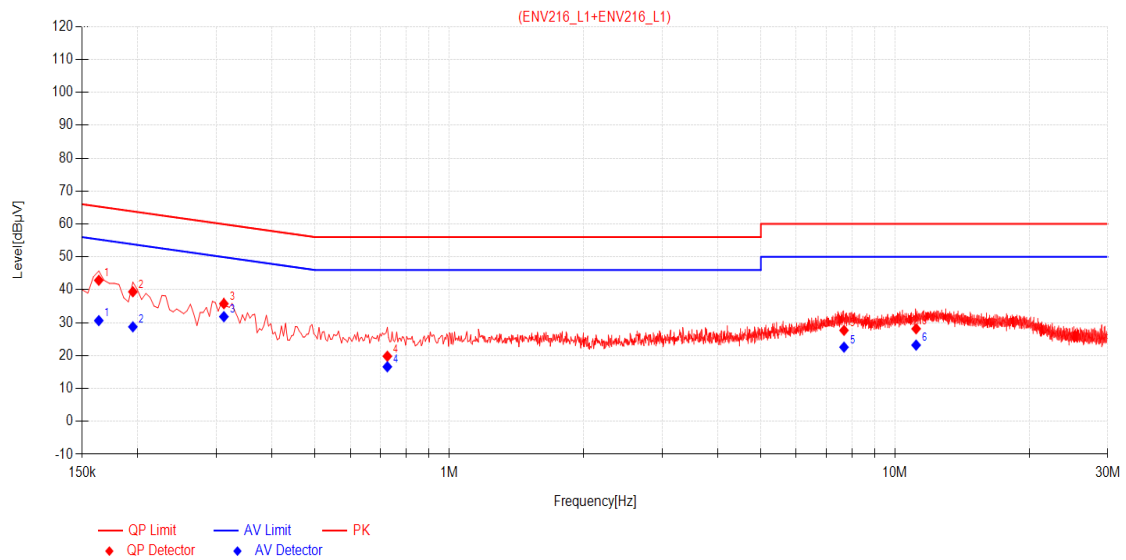

Final Data List

NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBuV]	QP Value [dBuV]	QP Limit [dBuV]	QP Margin [dB]	AV Reading [dBuV]	AV Value [dBuV]	AV Limit [dBuV]	AV Margin [dB]	Verdict
1	0.1635	9.95	32.93	42.88	65.28	22.40	20.68	30.63	55.28	24.65	PASS
2	0.1950	9.96	29.43	39.39	63.82	24.43	18.78	28.74	53.82	25.08	PASS
3	0.3120	9.97	25.79	35.76	59.92	24.16	21.85	31.82	49.92	18.10	PASS
4	0.7260	9.95	9.84	19.79	56.00	36.21	6.65	16.60	46.00	29.40	PASS
5	7.6830	10.36	17.30	27.66	60.00	32.34	12.20	22.56	50.00	27.44	PASS
6	11.1525	10.35	17.79	28.14	60.00	31.86	12.83	23.18	50.00	26.82	PASS

6.2 Radiated Emissions (Below 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10-2020+Cor 1-2023 Section 6.4,6.5

Measurement Distance: 3M

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

Note

1.The above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

2. At frequencies below 1GHz, measurements may be performed at a distance different to specified in the regulations.

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Below 30MHz, Aux Factor = 40 dB/decade of distance, the aux factor is $40\log(3/300) = -80\text{dB}$ (for 3m test distance).

EX. Above 30MHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(10/3) = 10.46\text{dB}$ (for 10m test distance).

6.2.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C

Humidity: 50.2 % RH


Atmospheric Pressure: 1010 mbar

6.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Pre-scan	05	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0

		is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Pre-scan	06	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Pre-scan	07	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.

6.2.3 Test Setup Diagram

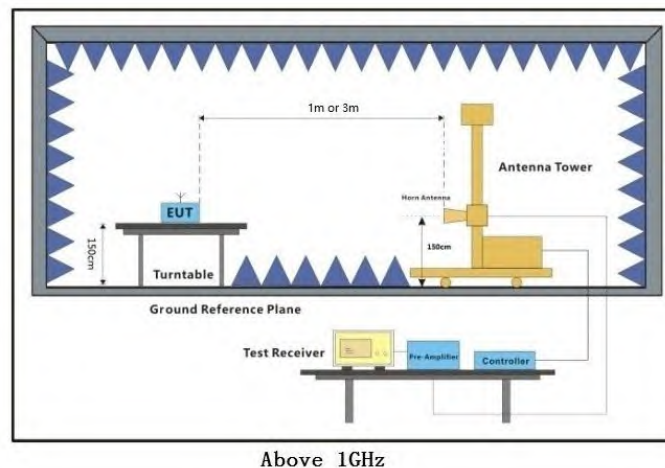


6.2.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8m above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3m away from the interference-receiving antenna, which was mounted on the variable-height antenna tower.
- c. The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1m) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:


1. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only below points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
2. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the worst-case test curve is displayed.

H

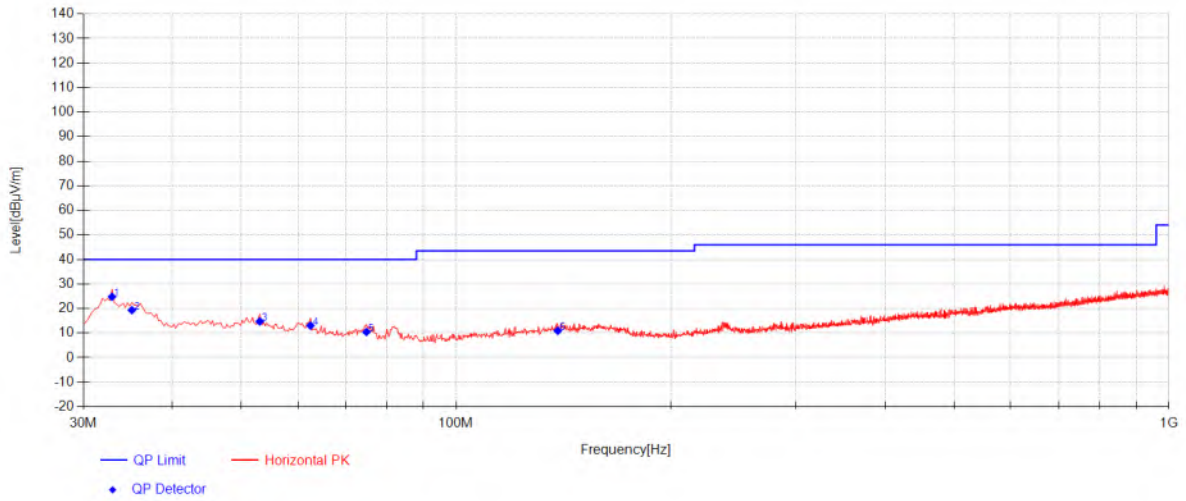

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity
1	32.91	55.09	-42.71	12.42	24.79	40.00	15.21	Horizontal
2	35.0925	49.52	-42.71	12.52	19.33	40.00	20.67	Horizontal
3	53.0375	44.35	-42.64	13.03	14.73	40.00	25.27	Horizontal
4	62.495	43.65	-42.52	11.88	13.01	40.00	26.99	Horizontal
5	74.8625	43.13	-42.42	9.72	10.43	40.00	29.57	Horizontal
6	138.8825	39.97	-41.60	12.53	10.90	43.50	32.60	Horizontal

V

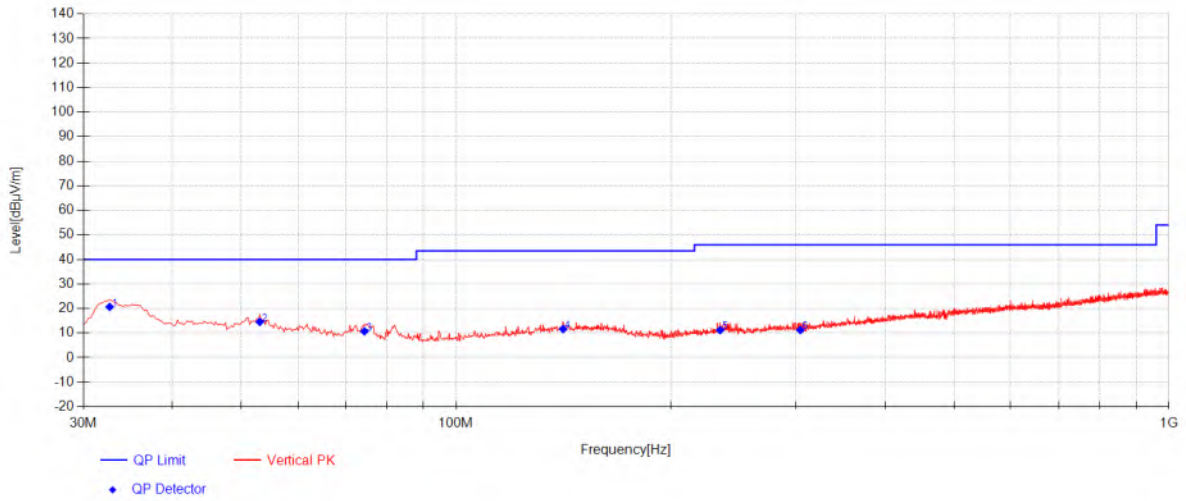

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity
1	32.6675	50.98	-42.71	12.41	20.67	40.00	19.33	Vertical
2	53.0375	44.17	-42.64	13.03	14.55	40.00	25.45	Vertical
3	74.3775	43.35	-42.42	9.77	10.71	40.00	29.29	Vertical
4	141.3075	40.60	-41.58	12.62	11.64	43.50	31.86	Vertical
5	234.67	40.96	-41.27	11.48	11.17	46.00	34.83	Vertical
6	304.025	39.50	-41.11	12.82	11.21	46.00	34.79	Vertical

6.3 Radiated Emissions (Above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)
Test Method: ANSI C63.10-2020+Cor 1-2023 Section 6.6 & 12.7
Measurement Distance: 3M

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark:

1. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

2. Above 18GHz, measurements may be performed at a distance shorter than that specified in the regulations

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Above 18GHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(1/3) = -9.54\text{dB}$ (for 1m test distance).

6.3.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C


Humidity: 50.2 % RH

Atmospheric Pressure: 1010 mbar

6.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	07	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.

6.3.3 Test Setup Diagram

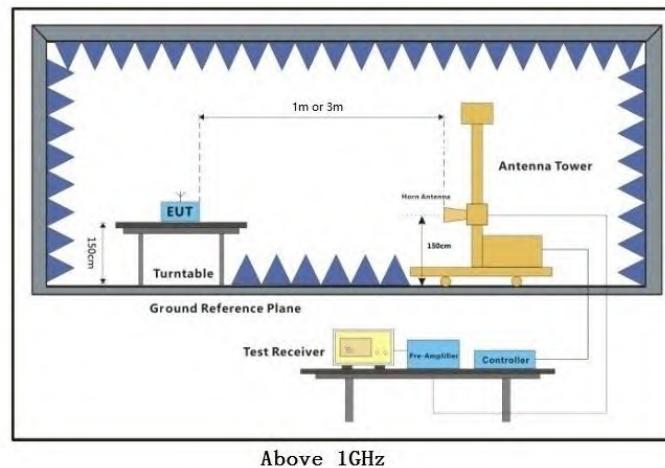


6.3.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:


1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 1GHz to 40GHz, The points marked on below plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
4. The disturbance above 18GHz were very low and the below harmonics were the highest point could be found when testing, so only the below harmonics had been displayed.
5. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
7. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle<98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.

11a_TX_CH_36_Horizontal

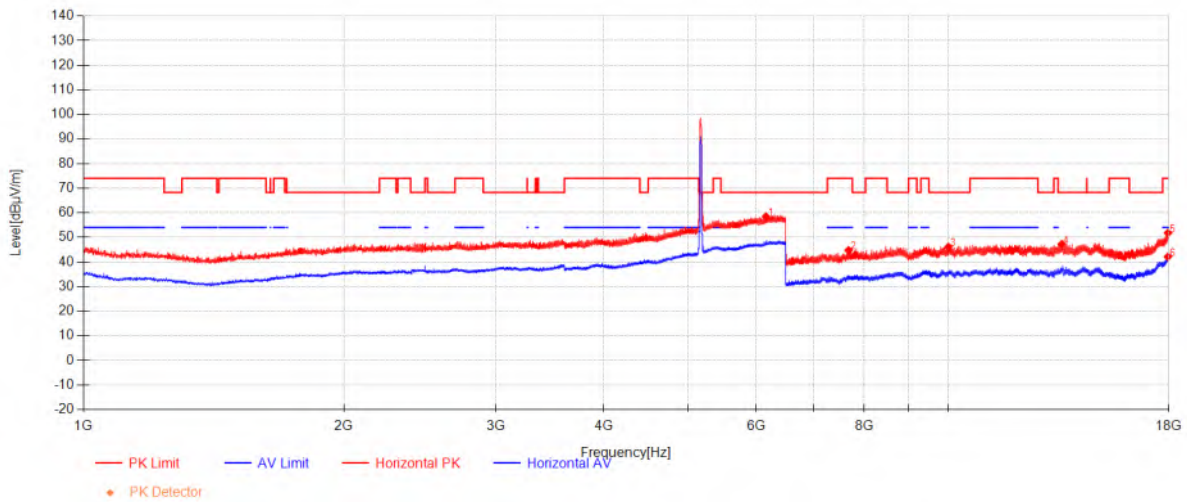


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6156.0385	41.33	33.39	-16.25	58.47	68.30	9.83	Horizontal
2	7671.0833	53.47	36.37	-45.06	44.77	74.00	29.23	Horizontal
3	10006.541	49.03	38.80	-41.73	46.10	68.30	22.20	Horizontal
4	13530.333	46.42	39.60	-38.75	47.26	68.30	21.04	Horizontal
5	17954.958	44.34	44.53	-37.11	51.76	74.00	22.24	Horizontal
6	17947.770	34.74	44.49	-37.13	42.10	54.00	11.90	Horizontal

11a_TX_CH_36_Vertical

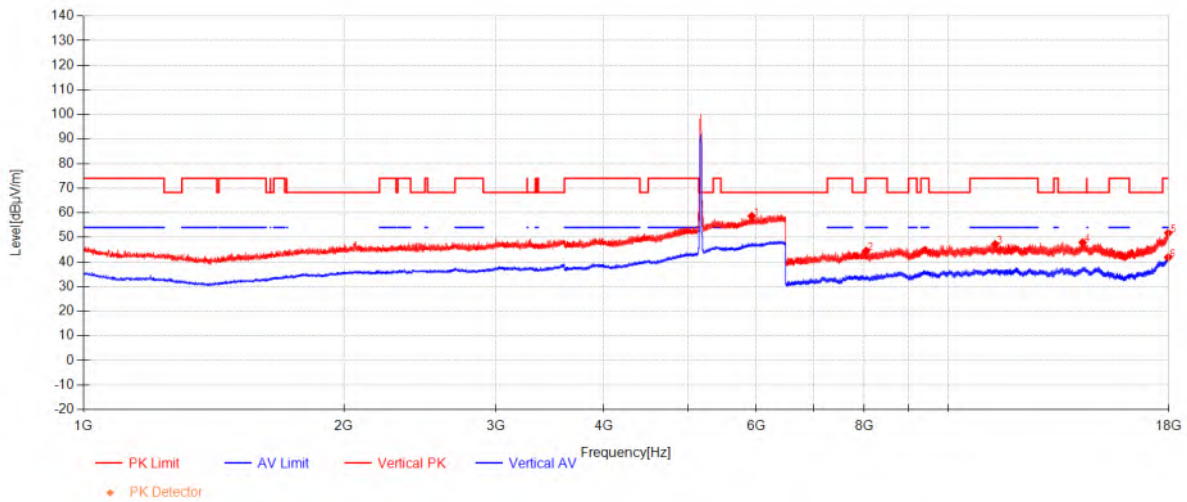


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5928	41.90	32.77	-15.99	58.68	68.30	9.62	Vertical
2	8037.1667	52.47	36.34	-44.33	44.48	74.00	29.52	Vertical
3	11330.958	47.89	39.47	-40.22	47.14	74.00	26.86	Vertical
4	14306.104	46.39	40.27	-38.78	47.88	68.30	20.42	Vertical
5	17967.895	44.24	44.61	-37.07	51.78	74.00	22.22	Vertical
6	17962.625	34.35	44.58	-37.08	41.84	54.00	12.16	Vertical

11a_TX_CH_40_Horizontal

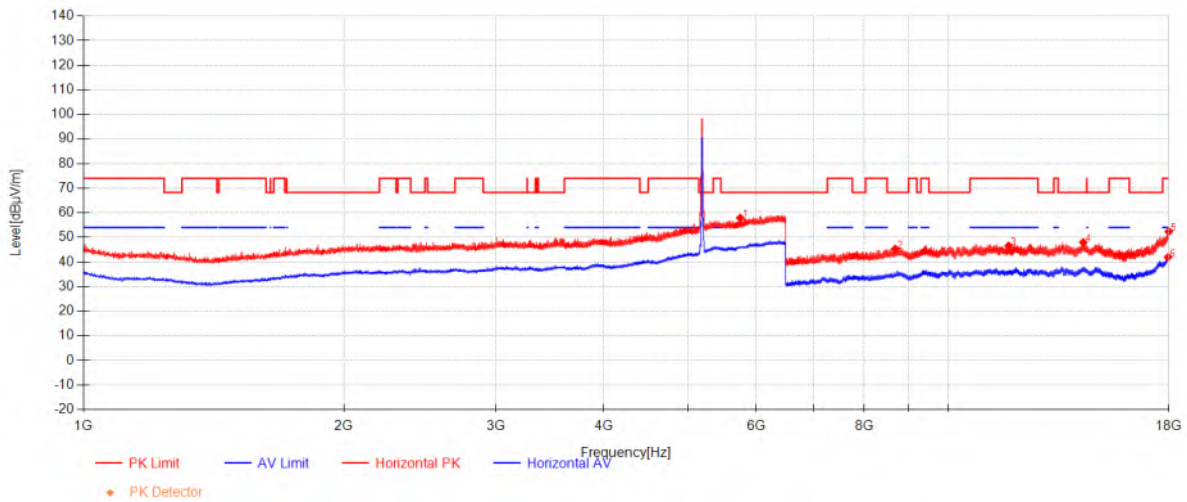


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5749.4615	41.95	32.70	-16.76	57.89	68.30	10.41	Horizontal
2	8684.0417	51.97	37.05	-43.76	45.26	68.30	23.04	Horizontal
3	11748.312	46.72	39.43	-39.57	46.57	74.00	27.43	Horizontal
4	14326.708	46.46	40.27	-38.76	47.97	68.30	20.33	Horizontal
5	17996.166	44.54	44.78	-36.99	52.33	74.00	21.67	Horizontal
6	17953.520	34.50	44.52	-37.11	41.91	54.00	12.09	Horizontal

11a_TX_CH_40_Vertical

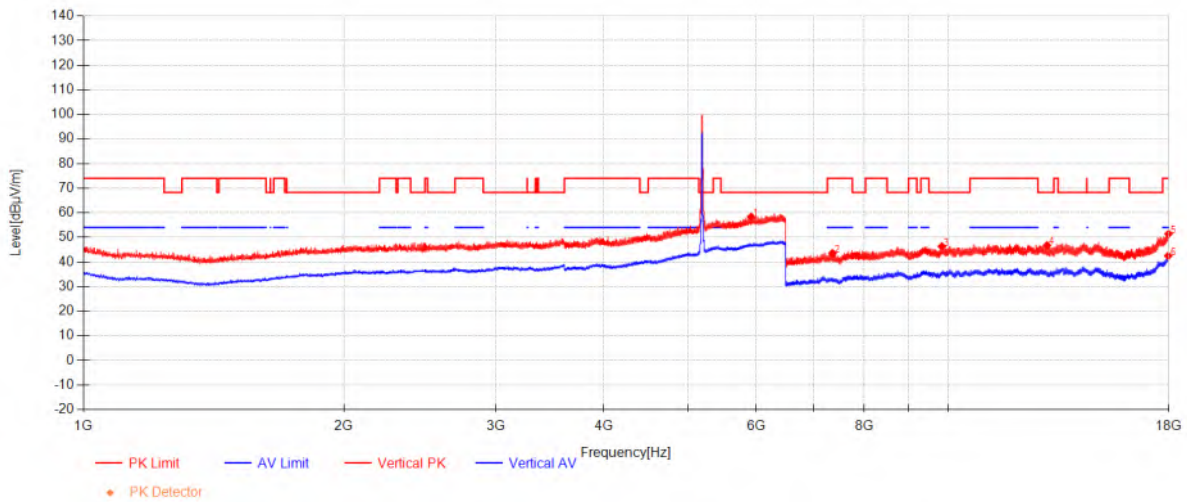


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5919.1154	41.57	32.77	-16.00	58.34	68.30	9.96	Vertical
2	7349.0833	53.21	36.13	-45.79	43.55	74.00	30.45	Vertical
3	9834.0417	49.66	38.57	-41.96	46.27	68.30	22.03	Vertical
4	13012.833	46.73	38.82	-38.81	46.74	68.30	21.56	Vertical
5	17981.312	43.75	44.69	-37.03	51.41	74.00	22.59	Vertical
6	17967.416	34.93	44.60	-37.07	42.46	54.00	11.54	Vertical

11a_TX_CH_48_Horizontal

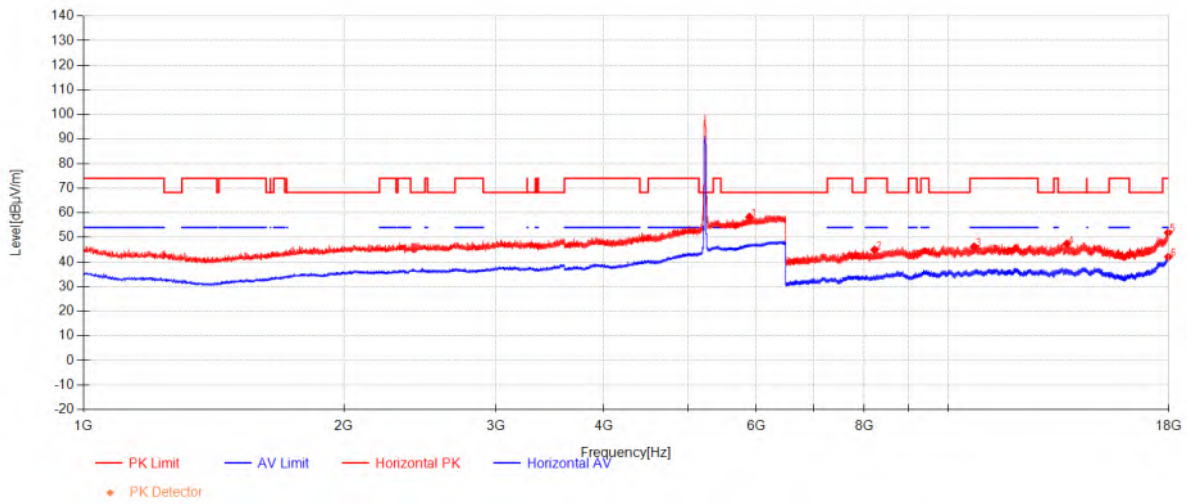

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5892.4615	41.55	32.76	-16.05	58.26	68.30	10.04	Horizontal
2	8220.6875	52.69	36.54	-44.29	44.94	74.00	29.06	Horizontal
3	10715.708	47.66	39.30	-40.75	46.21	74.00	27.79	Horizontal
4	13716.729	45.55	39.88	-38.05	47.38	68.30	20.92	Horizontal
5	17961.187	44.39	44.57	-37.09	51.87	74.00	22.13	Horizontal
6	17973.645	34.45	44.64	-37.05	42.04	54.00	11.96	Horizontal

11a_TX_CH_48_Veritical

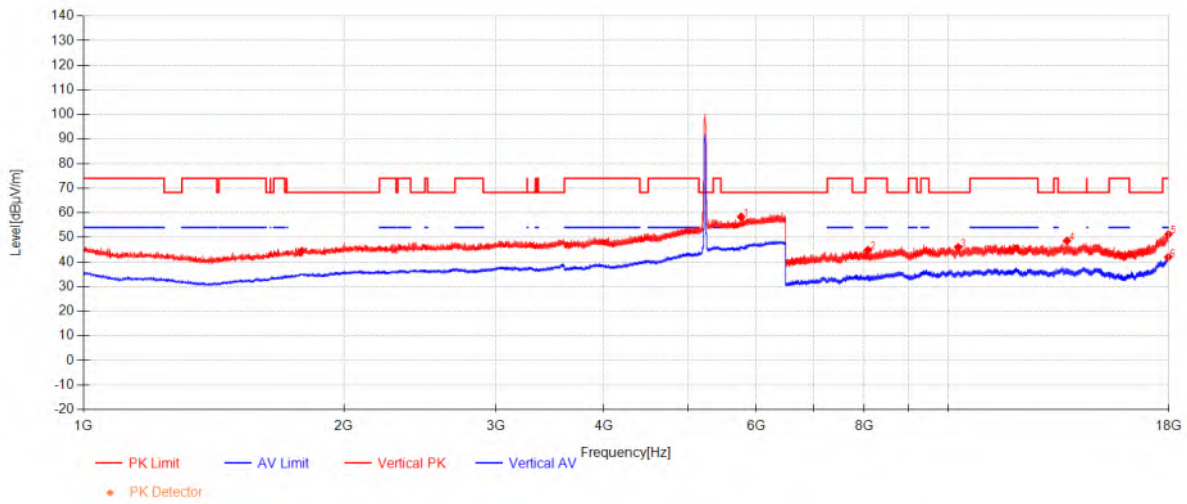


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5763.4231	42.35	32.71	-16.71	58.35	68.30	9.95	Vertical
2	8076.9375	52.84	36.38	-44.39	44.83	74.00	29.17	Vertical
3	10268.645	48.36	38.99	-41.39	45.95	68.30	22.35	Vertical
4	13721.041	46.76	39.88	-38.07	48.57	68.30	19.73	Vertical
5	17979.395	43.58	44.68	-37.04	51.22	74.00	22.78	Vertical
6	17964.541	34.40	44.59	-37.08	41.91	54.00	12.09	Vertical



Report No.: KSCR260100024804


Page: 28 of 283

11a_TX_CH_52_Horizontal

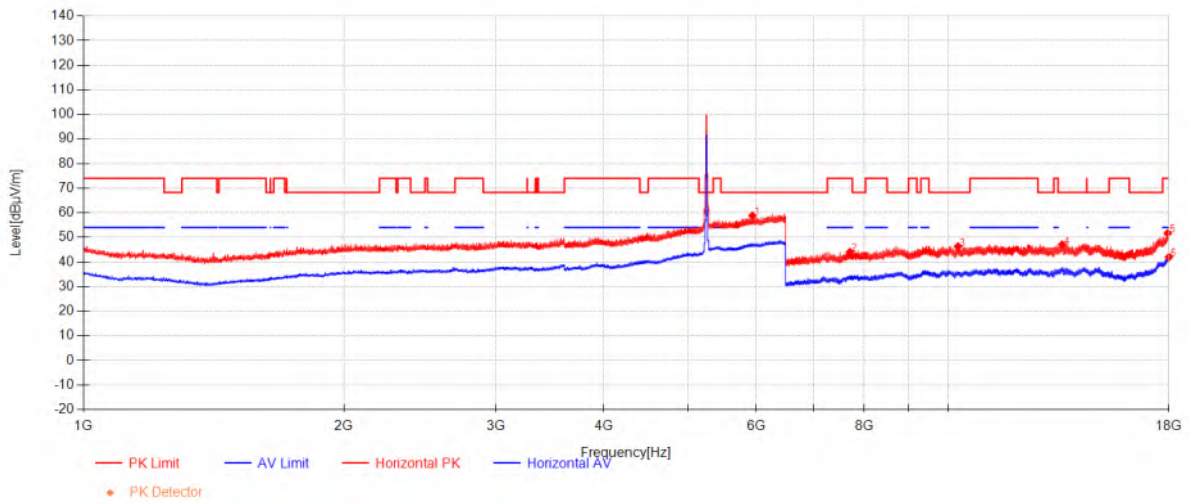


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5938.5769	42.02	32.78	-15.99	58.81	68.30	9.49	Horizontal
2	7697.4375	52.79	36.36	-45.13	44.02	74.00	29.98	Horizontal
3	10266.729	48.73	38.99	-41.41	46.30	68.30	22.00	Horizontal
4	13544.229	46.09	39.62	-38.66	47.05	68.30	21.25	Horizontal
5	17938.666	44.34	44.43	-37.15	51.62	74.00	22.38	Horizontal
6	17997.604	34.17	44.79	-36.99	41.97	54.00	12.03	Horizontal

11a_TX_CH_52_Vertical

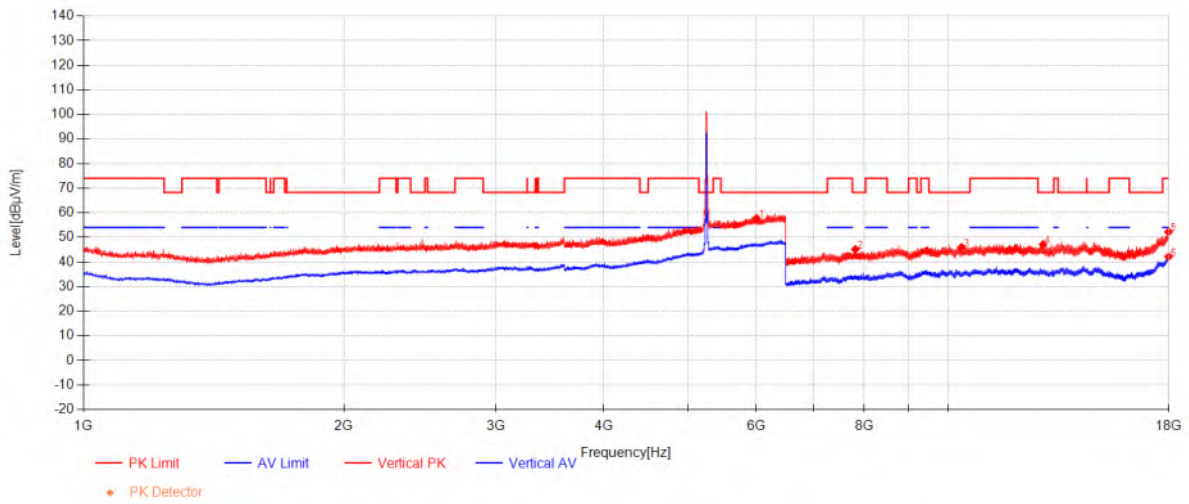


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6004.1538	40.96	32.82	-15.97	57.80	68.30	10.50	Vertical
2	7810.5208	53.70	36.34	-44.91	45.13	68.30	23.17	Vertical
3	10361.604	48.12	39.05	-41.18	45.99	68.30	22.31	Vertical
4	12874.833	46.91	38.88	-38.63	47.16	68.30	21.14	Vertical
5	17982.75	44.54	44.70	-37.03	52.21	74.00	21.79	Vertical
6	17983.708	34.44	44.70	-37.03	42.12	54.00	11.88	Vertical

11a_TX_CH_60_Horizontal

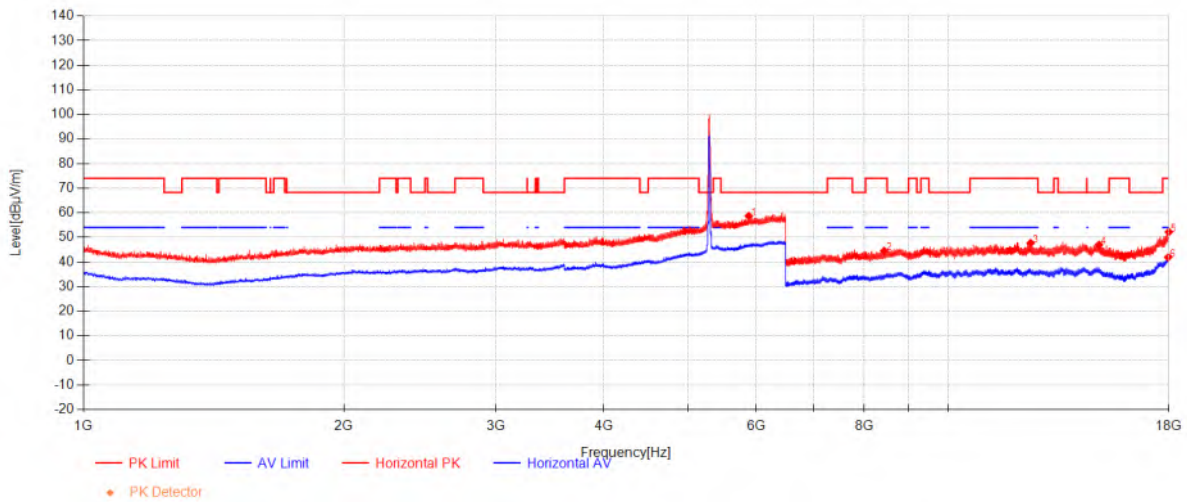


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5880.1923	42.06	32.75	-16.12	58.69	68.30	9.61	Horizontal
2	8433.9167	51.85	36.78	-44.13	44.50	74.00	29.50	Horizontal
3	12456.041	47.14	39.13	-38.59	47.68	74.00	26.32	Horizontal
4	14940.041	44.95	40.21	-38.20	46.96	68.30	21.34	Horizontal
5	17997.604	44.37	44.79	-36.99	52.17	74.00	21.83	Horizontal
6	17962.145	34.40	44.57	-37.09	41.89	54.00	12.11	Horizontal

11a_TX_CH_60_Vertical

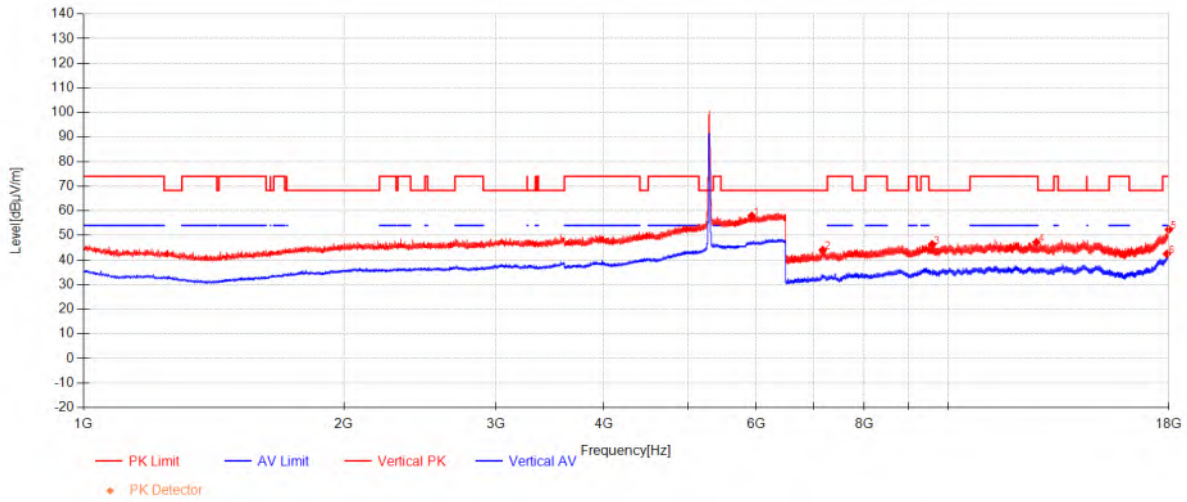


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5928.4231	41.18	32.77	-15.99	57.96	68.30	10.34	Vertical
2	7161.7292	53.91	35.79	-45.70	44.00	68.30	24.30	Vertical
3	9581.5208	50.00	38.21	-41.90	46.31	68.30	21.99	Vertical
4	12648.187	47.35	39.01	-39.19	47.17	74.00	26.83	Vertical
5	18000	44.50	44.80	-36.98	52.32	74.00	21.68	Vertical
6	17907.520	35.45	44.25	-37.24	42.46	54.00	11.54	Vertical

11a_TX_CH_64_Horizontal

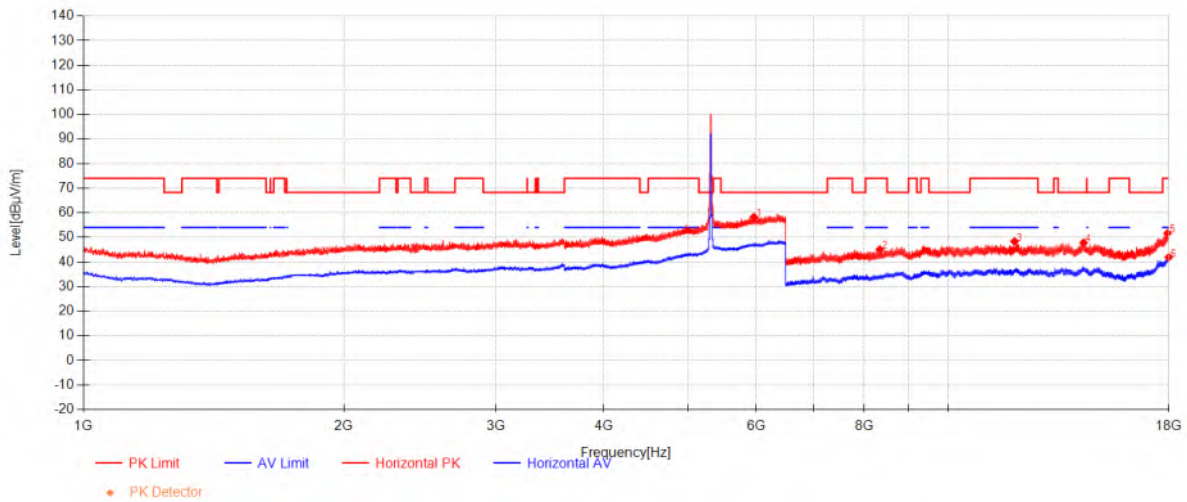


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5962.2692	41.49	32.78	-15.97	58.30	68.30	10.00	Horizontal
2	8336.6458	52.88	36.67	-44.49	45.06	74.00	28.94	Horizontal
3	11930.395	48.43	39.41	-39.50	48.34	74.00	25.66	Horizontal
4	14341.083	46.33	40.27	-38.75	47.84	68.30	20.46	Horizontal
5	17931	44.42	44.39	-37.17	51.63	74.00	22.37	Horizontal
6	17987.062	34.19	44.72	-37.02	41.90	54.00	12.10	Horizontal

11a_TX_CH_64_Vertical

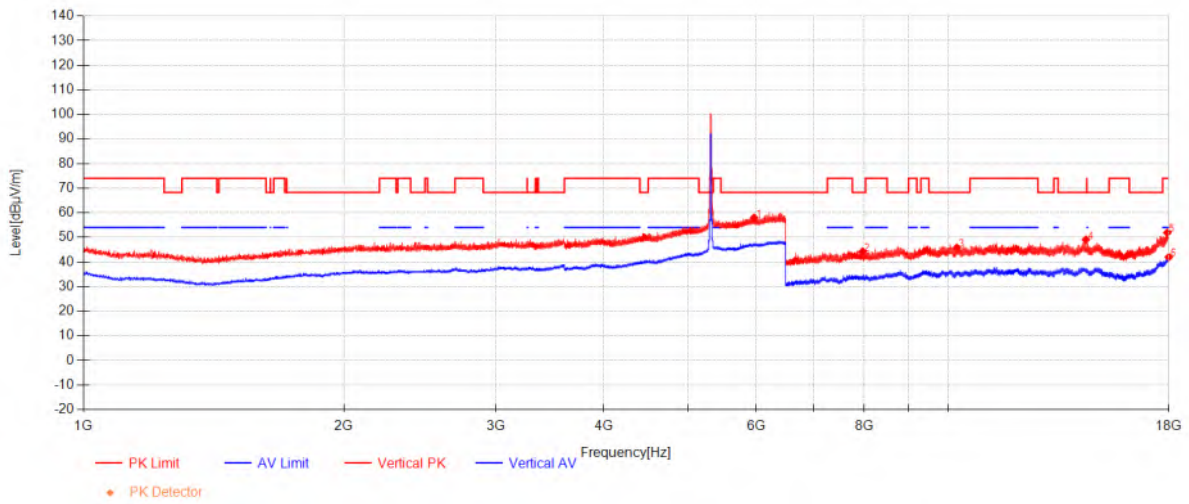


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5964.8077	41.17	32.79	-15.97	57.98	68.30	10.32	Vertical
2	7961.4583	52.45	36.31	-44.54	44.22	68.30	24.08	Vertical
3	10231.270	48.61	38.96	-41.77	45.80	68.30	22.50	Vertical
4	14428.770	47.41	40.26	-38.60	49.06	68.30	19.24	Vertical
5	17923.333	44.75	44.34	-37.19	51.90	74.00	22.10	Vertical
6	17993.770	34.21	44.76	-37.00	41.98	54.00	12.02	Vertical

11a_TX_CH_100_Horizontal

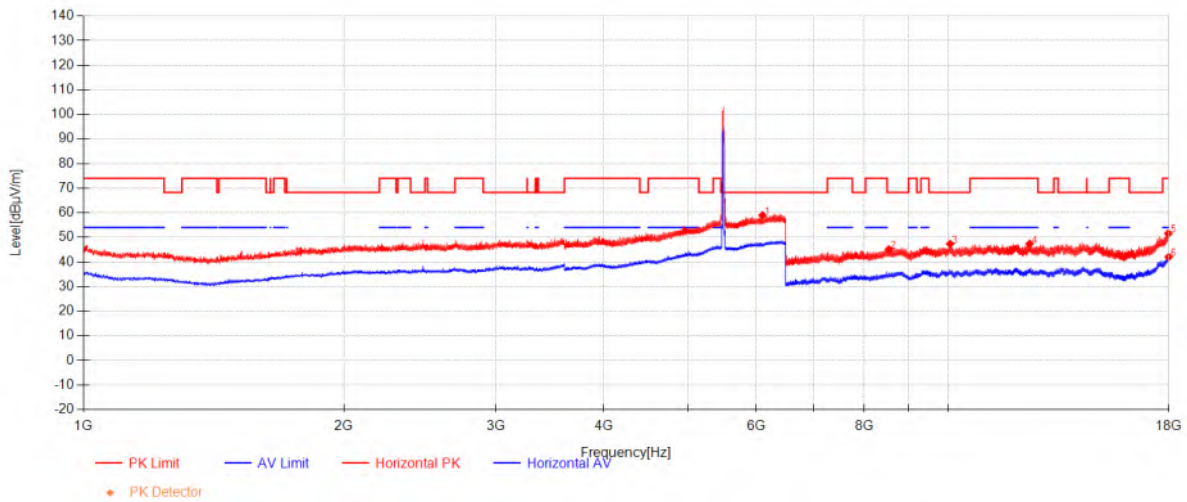


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6099.7692	42.26	33.18	-16.48	58.96	68.30	9.34	Horizontal
2	8538.375	52.05	36.89	-43.85	45.09	68.30	23.21	Horizontal
3	10050.625	50.17	38.84	-41.68	47.32	68.30	20.98	Horizontal
4	12421.541	46.62	39.15	-38.42	47.35	74.00	26.65	Horizontal
5	17967.416	44.01	44.60	-37.07	51.54	74.00	22.46	Horizontal
6	17987.062	34.31	44.72	-37.02	42.02	54.00	11.98	Horizontal

11a_TX_CH_100_Vertical

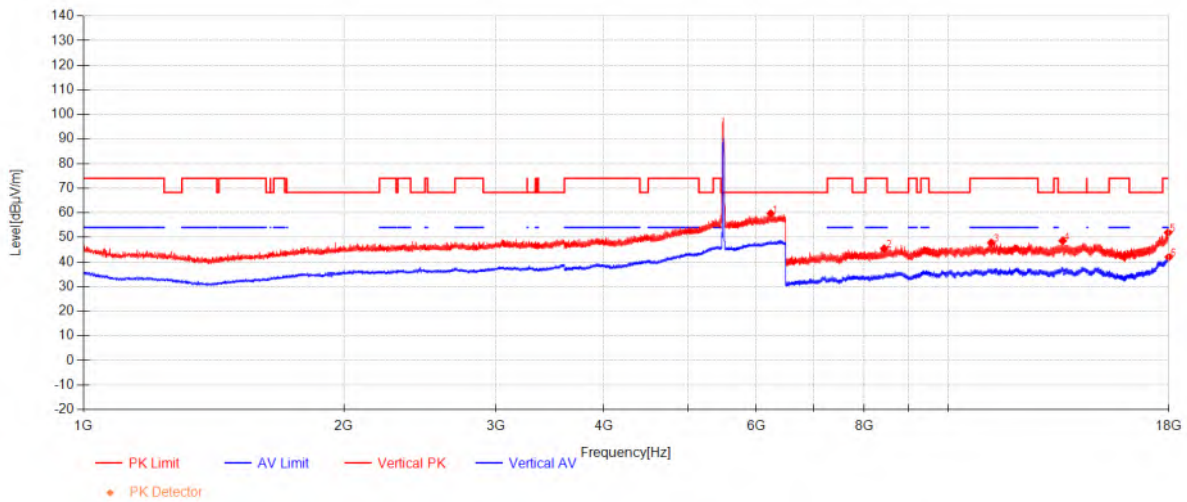


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6235.5769	42.09	33.70	-16.13	59.66	68.30	8.64	Vertical
2	8434.3958	52.78	36.78	-44.13	45.43	74.00	28.57	Vertical
3	11215.479	48.32	39.48	-40.03	47.77	74.00	26.23	Vertical
4	13565.312	47.44	39.65	-38.52	48.57	68.30	19.73	Vertical
5	17960.708	44.42	44.56	-37.09	51.89	74.00	22.11	Vertical
6	17994.25	34.20	44.77	-37.00	41.97	54.00	12.03	Vertical

11a_TX_CH_116_Horizontal

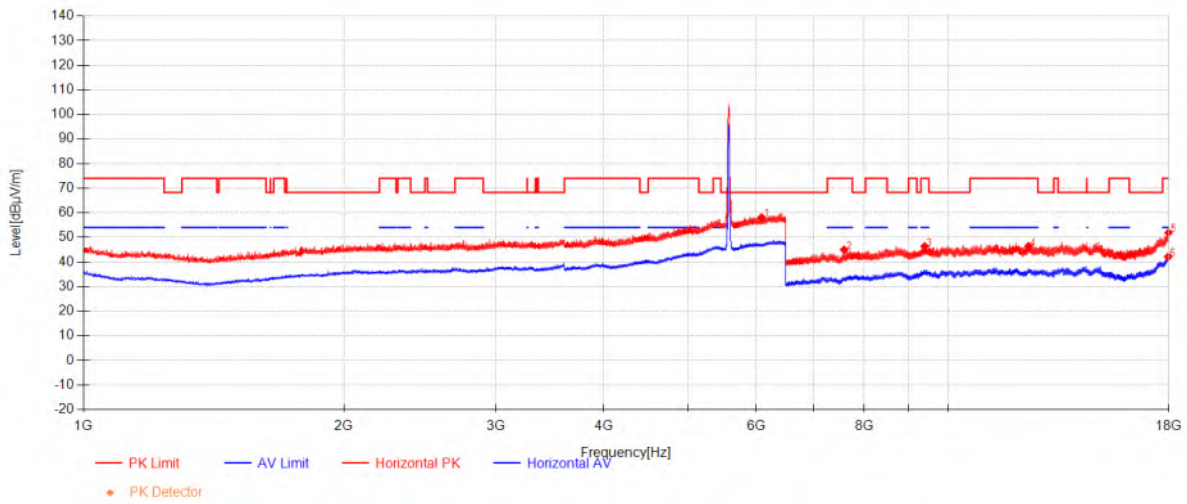


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6083.6923	41.37	33.12	-16.39	58.09	68.30	10.21	Horizontal
2	7579.5625	53.74	36.38	-45.13	44.99	74.00	29.01	Horizontal
3	9394.6458	51.20	37.95	-42.82	46.34	74.00	27.66	Horizontal
4	12385.125	45.66	39.17	-38.46	46.37	74.00	27.63	Horizontal
5	17979.395	44.22	44.68	-37.04	51.86	74.00	22.14	Horizontal
6	17960.708	34.59	44.56	-37.09	42.06	54.00	11.94	Horizontal

11a_TX_CH_116_Vertical

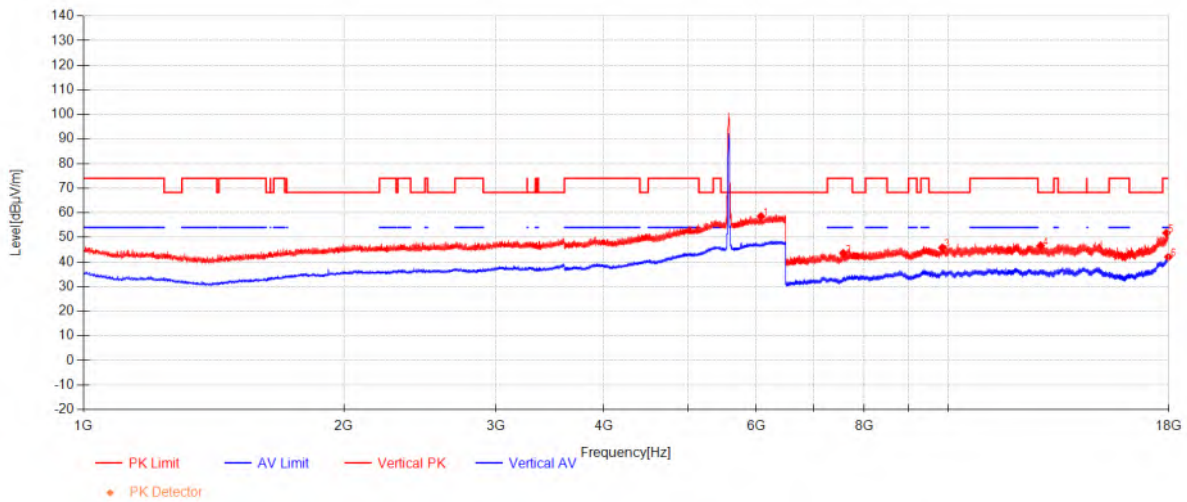


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6075.6538	41.81	33.09	-16.35	58.55	68.30	9.75	Vertical
2	7563.2708	52.54	36.39	-45.33	43.60	74.00	30.40	Vertical
3	9847.9375	49.10	38.59	-41.93	45.76	68.30	22.54	Vertical
4	12790.979	46.97	38.93	-39.26	46.64	68.30	21.66	Vertical
5	17880.208	45.09	44.08	-37.41	51.76	74.00	22.24	Vertical
6	17972.208	34.43	44.63	-37.06	42.01	54.00	11.99	Vertical

11a_TX_CH_140_Horizontal

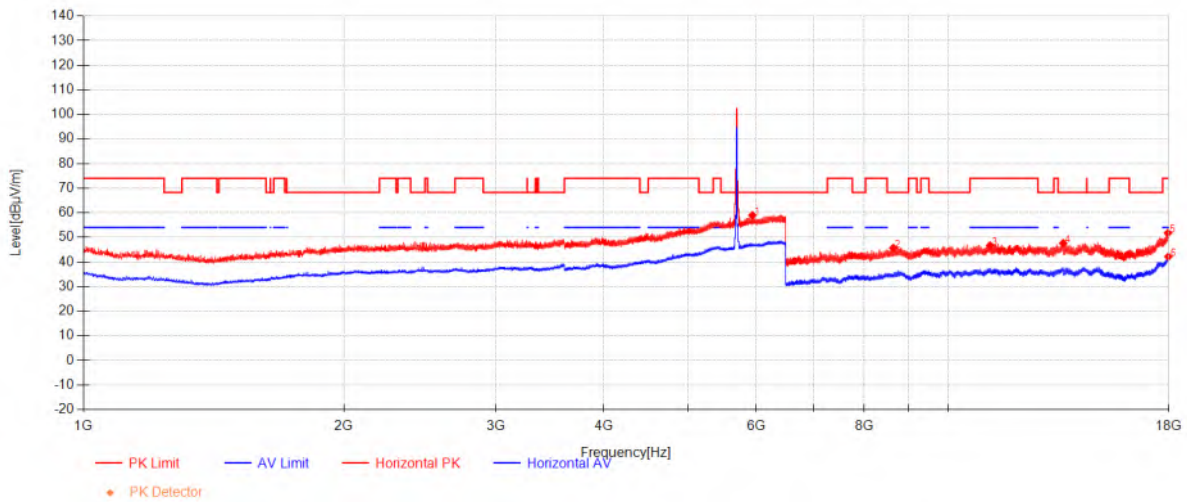


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5939	42.18	32.78	-15.99	58.97	68.30	9.33	Horizontal
2	8639.9583	52.61	37.00	-43.95	45.66	68.30	22.64	Horizontal
3	11180.020	47.22	39.48	-39.98	46.72	74.00	27.28	Horizontal
4	13584	46.34	39.68	-38.39	47.63	68.30	20.67	Horizontal
5	17952.083	44.33	44.51	-37.11	51.73	74.00	22.27	Horizontal
6	17969.812	34.60	44.62	-37.06	42.15	54.00	11.85	Horizontal

11a_TX_CH_140_Vertical

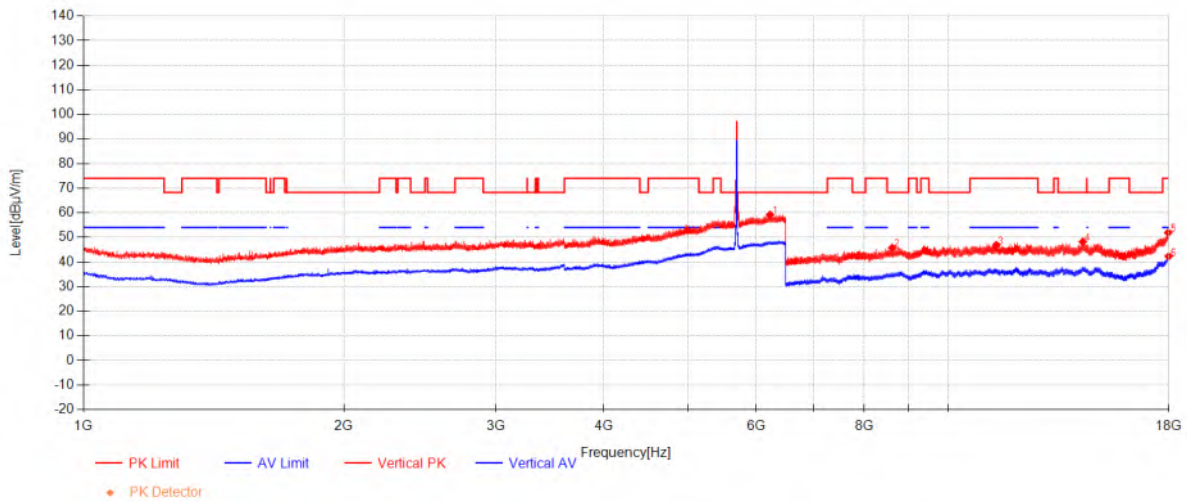


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6223.7308	41.66	33.65	-16.11	59.20	68.30	9.10	Vertical
2	8616	52.82	36.98	-44.06	45.74	68.30	22.56	Vertical
3	11366.416	47.34	39.46	-39.96	46.84	74.00	27.16	Vertical
4	14310.416	46.70	40.27	-38.77	48.20	68.30	20.10	Vertical
5	17967.895	44.36	44.61	-37.07	51.90	74.00	22.10	Vertical
6	17985.145	34.57	44.71	-37.02	42.26	54.00	11.74	Vertical

11a_TX_CH_149_Horizontal

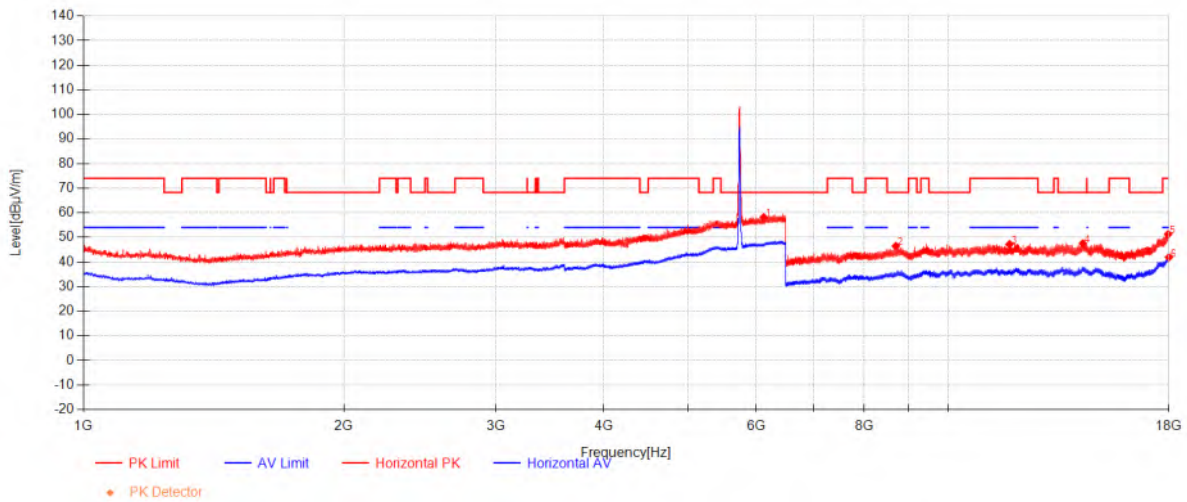


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6119.6538	41.28	33.25	-16.40	58.14	68.30	10.16	Horizontal
2	8698.4167	53.07	37.07	-43.70	46.44	68.30	21.86	Horizontal
3	11776.583	47.16	39.42	-39.39	47.19	74.00	26.81	Horizontal
4	14316.166	46.03	40.27	-38.77	47.53	68.30	20.77	Horizontal
5	17963.104	43.77	44.58	-37.08	51.27	74.00	22.73	Horizontal
6	18000	34.09	44.80	-36.98	41.91	54.00	12.09	Horizontal

11a_TX_CH_149_Vertical

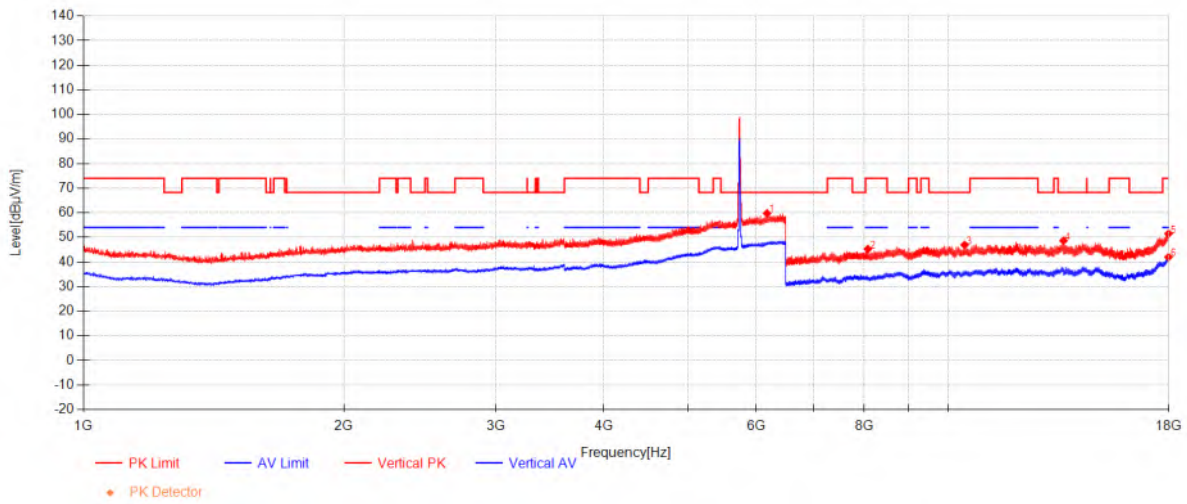

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6174.6538	42.47	33.46	-16.17	59.76	68.30	8.54	Vertical
2	8075.0208	53.26	36.38	-44.39	45.25	74.00	28.75	Vertical
3	10446.416	48.75	39.11	-40.93	46.93	68.30	21.37	Vertical
4	13596.937	47.25	39.70	-38.30	48.64	68.30	19.66	Vertical
5	17981.312	43.83	44.69	-37.03	51.49	74.00	22.51	Vertical
6	17978.437	34.35	44.67	-37.04	41.98	54.00	12.02	Vertical

11a_TX_CH_157_Horizontal

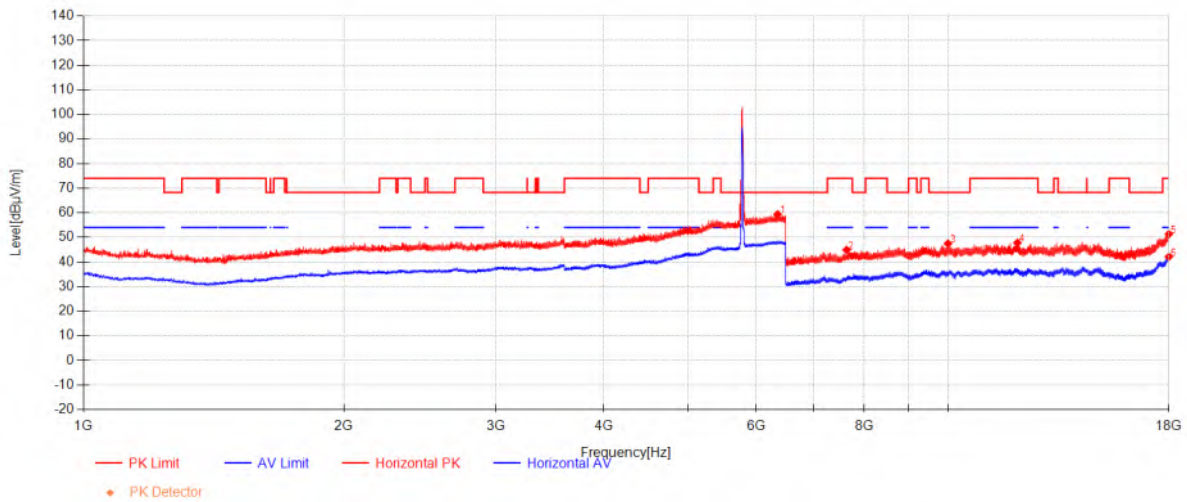

Data List


NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6351.9231	41.44	34.14	-16.19	59.39	68.30	8.91	Horizontal
2	7629.3958	53.48	36.37	-44.96	44.90	74.00	29.10	Horizontal
3	9994.0833	50.37	38.79	-41.74	47.42	68.30	20.88	Horizontal
4	12026.229	47.19	39.38	-38.78	47.79	74.00	26.21	Horizontal
5	17996.166	43.51	44.78	-36.99	51.30	74.00	22.70	Horizontal
6	17995.208	34.32	44.77	-36.99	42.10	54.00	11.90	Horizontal



Report No.: KSCR260100024804


Page: 43 of 283

11a_TX_CH_157_Vertical

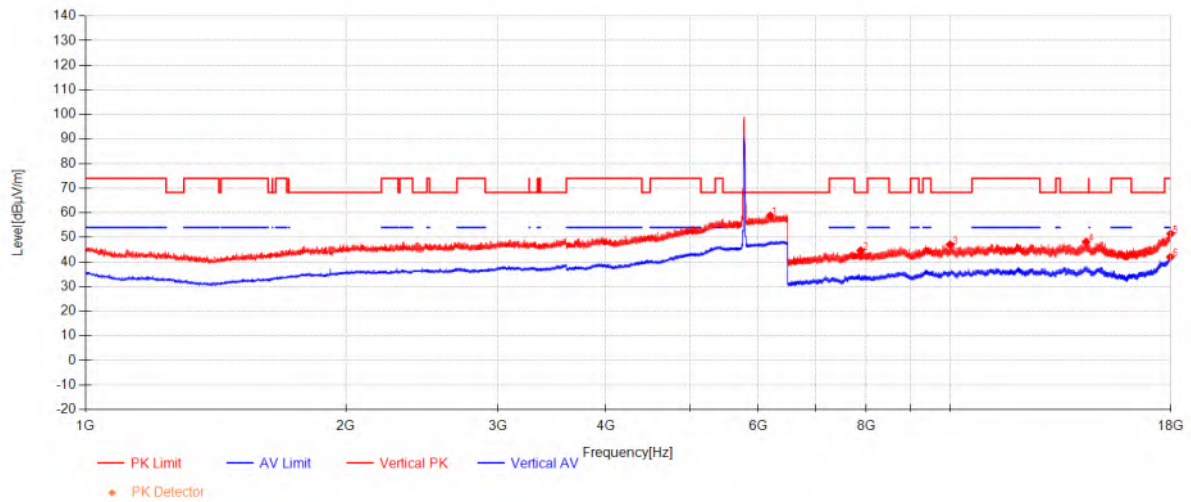


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6194.5385	41.41	33.54	-16.09	58.86	68.30	9.44	Vertical
2	7880	53.28	36.32	-44.96	44.65	68.30	23.65	Vertical
3	9998.3958	49.99	38.80	-41.74	47.05	68.30	21.25	Vertical
4	14361.208	46.64	40.26	-38.74	48.17	68.30	20.13	Vertical
5	17986.104	43.79	44.72	-37.02	51.49	74.00	22.51	Vertical
6	17973.645	34.41	44.64	-37.05	42.00	54.00	12.00	Vertical

11a_TX_CH_165_Horizontal

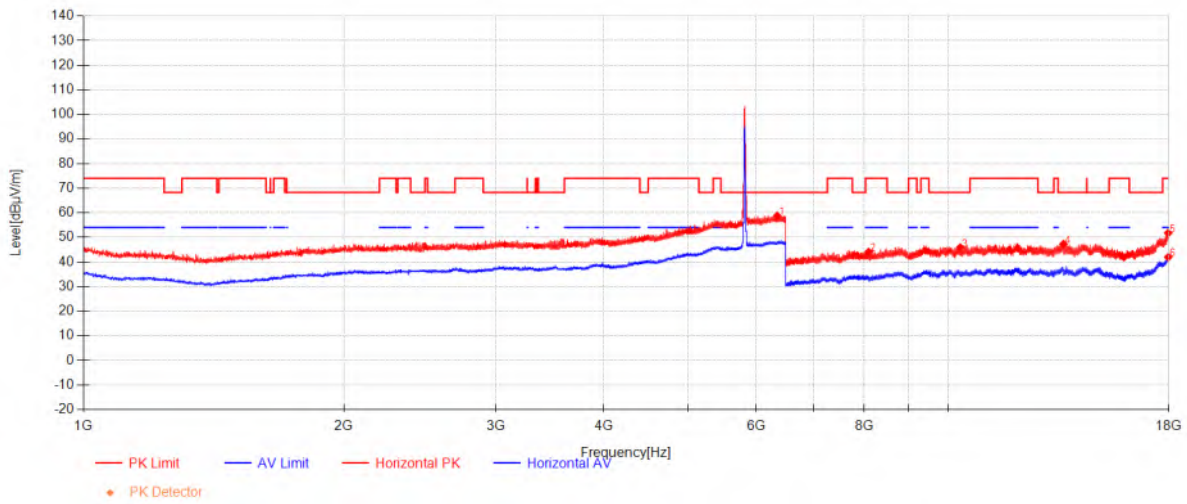


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6343.4615	40.87	34.11	-16.20	58.78	68.30	9.52	Horizontal
2	8090.3542	52.06	36.40	-44.41	44.04	74.00	29.96	Horizontal
3	10328.062	48.01	39.03	-41.13	45.91	68.30	22.39	Horizontal
4	13595.979	45.89	39.69	-38.31	47.28	68.30	21.02	Horizontal
5	17960.229	44.26	44.56	-37.09	51.73	74.00	22.27	Horizontal
6	17964.541	34.44	44.59	-37.08	41.95	54.00	12.05	Horizontal

11a_TX_CH_165_Vertical

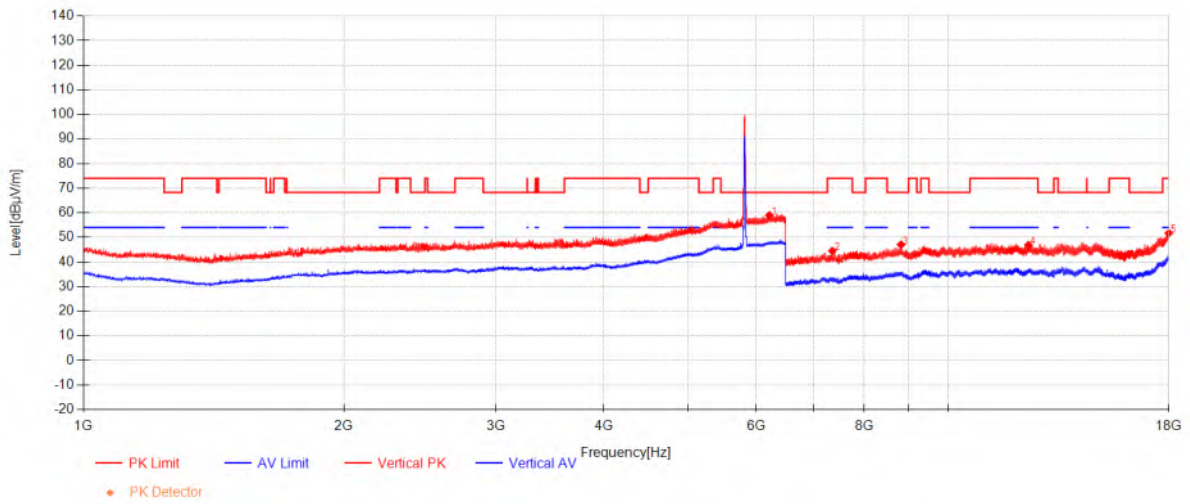


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6211.8846	41.48	33.61	-16.09	59.00	68.30	9.30	Vertical
2	7345.25	54.14	36.12	-45.81	44.46	74.00	29.54	Vertical
3	8820.125	53.63	37.20	-43.80	47.03	68.30	21.27	Vertical
4	12382.25	46.18	39.17	-38.49	46.86	74.00	27.14	Vertical
5	17990.895	43.97	44.75	-37.01	51.71	74.00	22.29	Vertical

11ac(VHT20)_TX_CH_36_Horizontal

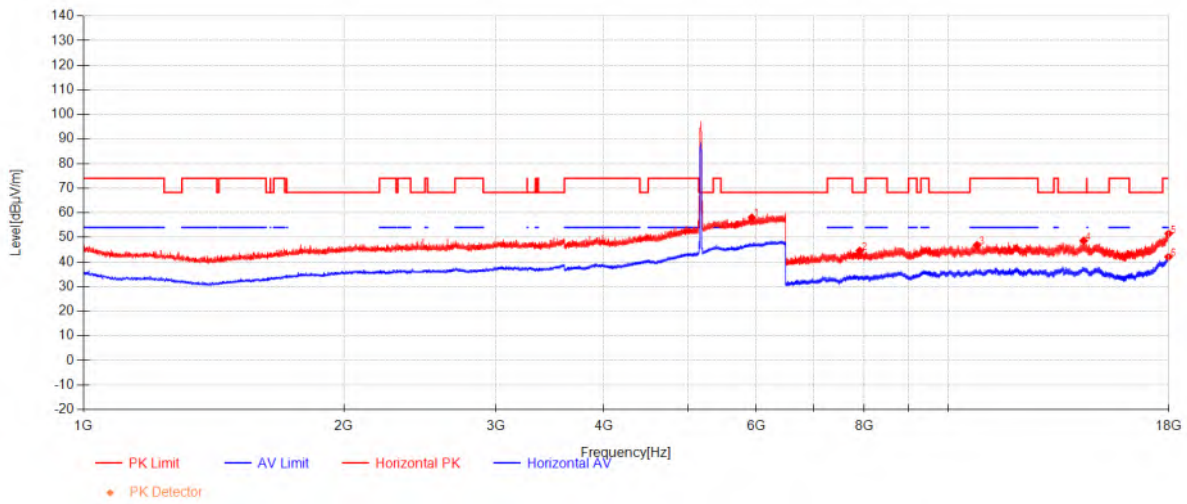


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5929.6923	41.24	32.77	-15.99	58.02	68.30	10.28	Horizontal
2	7903	53.13	36.32	-44.95	44.50	68.30	23.80	Horizontal
3	10799.083	47.89	39.36	-40.45	46.80	74.00	27.20	Horizontal
4	14344.437	47.07	40.27	-38.75	48.59	68.30	19.71	Horizontal
5	17985.625	43.80	44.71	-37.02	51.49	74.00	22.51	Horizontal
6	17976.520	34.45	44.66	-37.05	42.06	54.00	11.94	Horizontal

11ac(VHT20)_TX_CH_36_Vertical

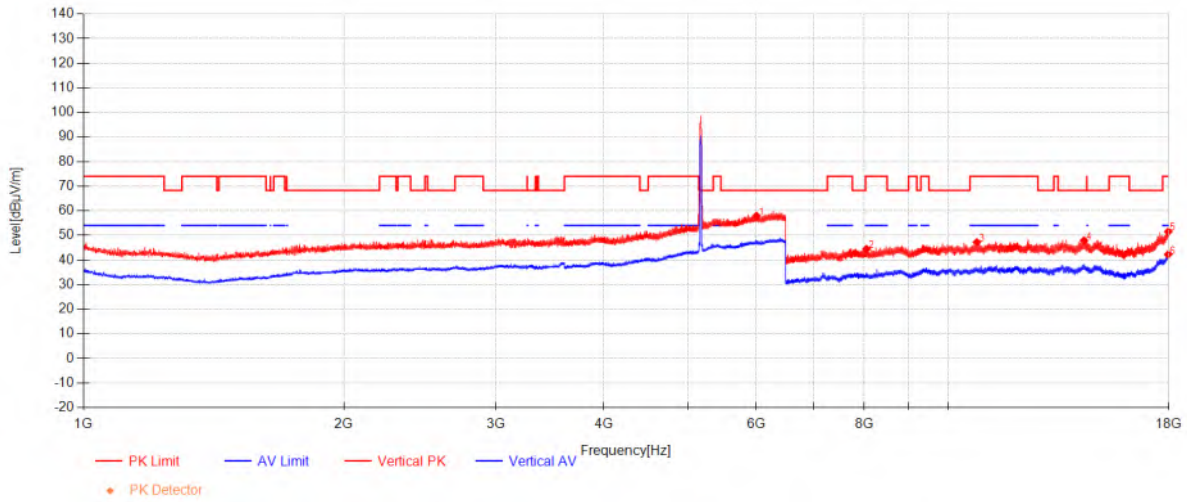


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6003.7308	41.07	32.81	-15.97	57.91	68.30	10.39	Vertical
2	8044.8333	52.42	36.35	-44.34	44.43	74.00	29.57	Vertical
3	10793.812	48.30	39.36	-40.47	47.18	74.00	26.82	Vertical
4	14360.25	46.36	40.26	-38.74	47.89	68.30	20.41	Vertical
5	17964.541	44.01	44.59	-37.08	51.52	74.00	22.48	Vertical
6	17959.270	34.74	44.56	-37.09	42.20	54.00	11.80	Vertical

11ac(VHT20)_TX_CH_40_Horizontal

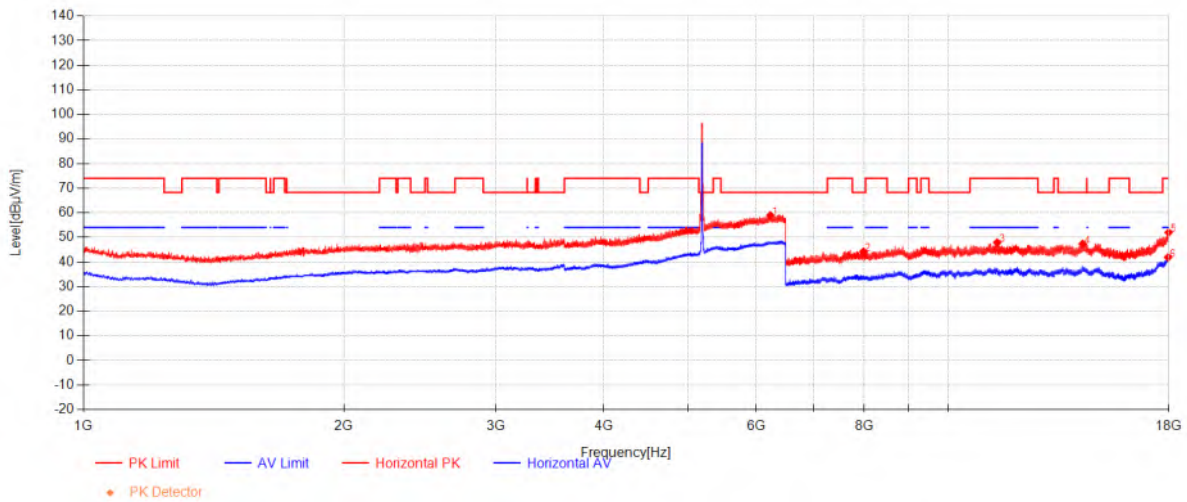

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6227.9615	41.40	33.67	-16.11	58.95	68.30	9.35	Horizontal
2	7981.1042	52.29	36.30	-44.40	44.19	68.30	24.11	Horizontal
3	11394.687	48.20	39.46	-39.75	47.91	74.00	26.09	Horizontal
4	14305.625	45.88	40.27	-38.78	47.37	68.30	20.93	Horizontal
5	17986.104	44.24	44.72	-37.02	51.94	74.00	22.06	Horizontal
6	17957.833	34.42	44.55	-37.10	41.87	54.00	12.13	Horizontal


11ac(VHT20)_TX_CH_40_Vertical

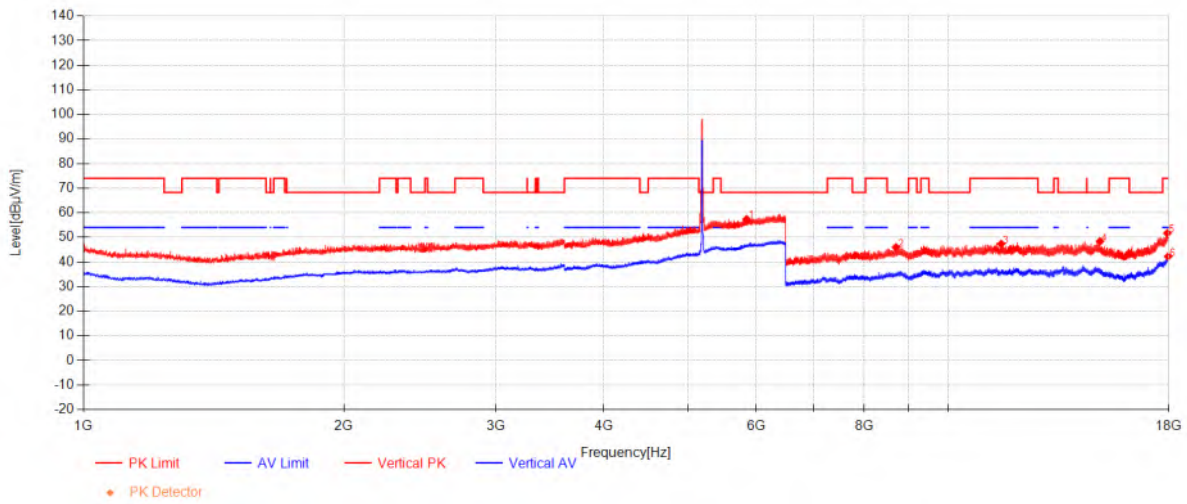

Data List


NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5847.6154	40.92	32.74	-16.30	57.36	68.30	10.94	Vertical
2	8702.25	52.58	37.07	-43.69	45.96	68.30	22.34	Vertical
3	11515.916	47.84	39.45	-39.95	47.34	74.00	26.66	Vertical
4	14983.166	46.11	40.20	-37.98	48.34	68.30	19.96	Vertical
5	17923.333	44.53	44.34	-37.19	51.68	74.00	22.32	Vertical
6	17958.791	34.75	44.55	-37.10	42.21	54.00	11.79	Vertical

11ac(VHT20)_TX_CH_48_Horizontal

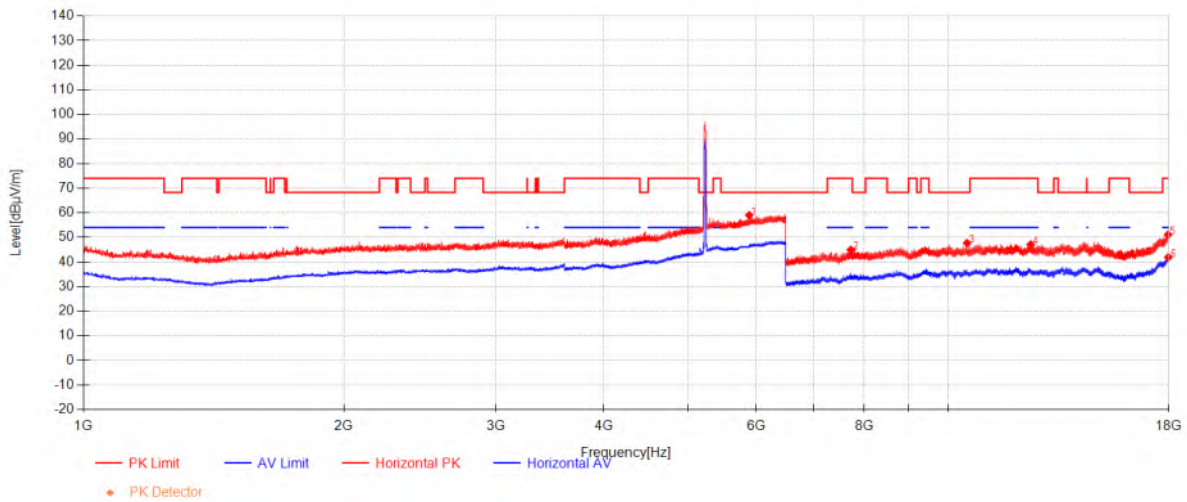


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5887.8077	42.34	32.76	-16.08	59.02	68.30	9.28	Horizontal
2	7718.5208	53.66	36.36	-45.10	44.92	74.00	29.08	Horizontal
3	10514.937	49.17	39.16	-40.66	47.67	68.30	20.63	Horizontal
4	12457	46.54	39.13	-38.59	47.07	74.00	26.93	Horizontal
5	17954	43.64	44.52	-37.11	51.06	74.00	22.94	Horizontal
6	17967.895	34.34	44.61	-37.07	41.88	54.00	12.12	Horizontal

11ac(VHT20)_TX_CH_48_Vertical

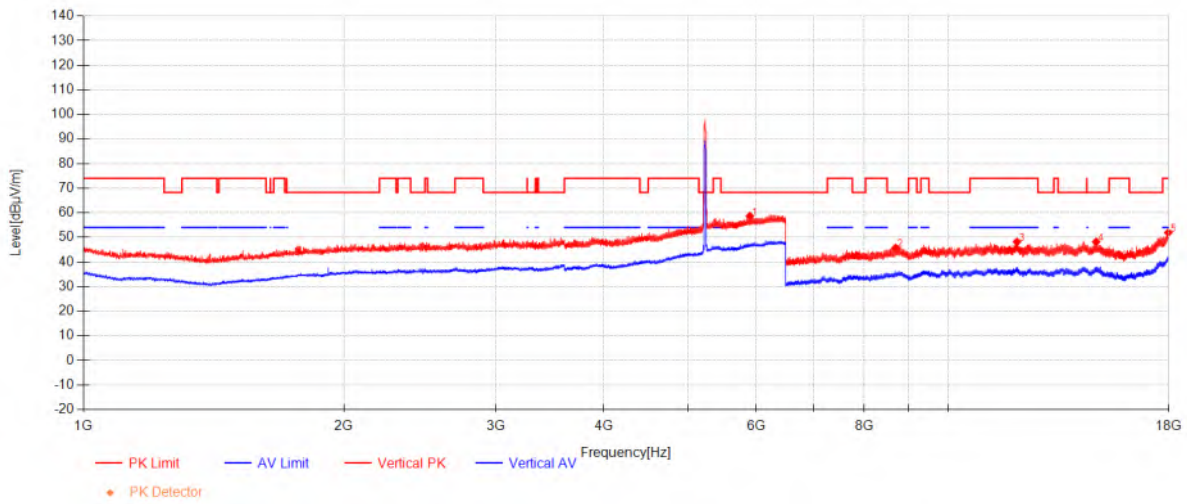


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5898.3846	41.92	32.76	-16.02	58.66	68.30	9.64	Vertical
2	8694.1042	52.36	37.06	-43.72	45.71	68.30	22.59	Vertical
3	12010.416	47.40	39.39	-38.65	48.15	74.00	25.85	Vertical
4	14829.354	45.75	40.22	-37.79	48.17	68.30	20.13	Vertical
5	17970.291	44.33	44.62	-37.06	51.89	74.00	22.11	Vertical

11ac(VHT20)_TX_CH_52_Horizontal

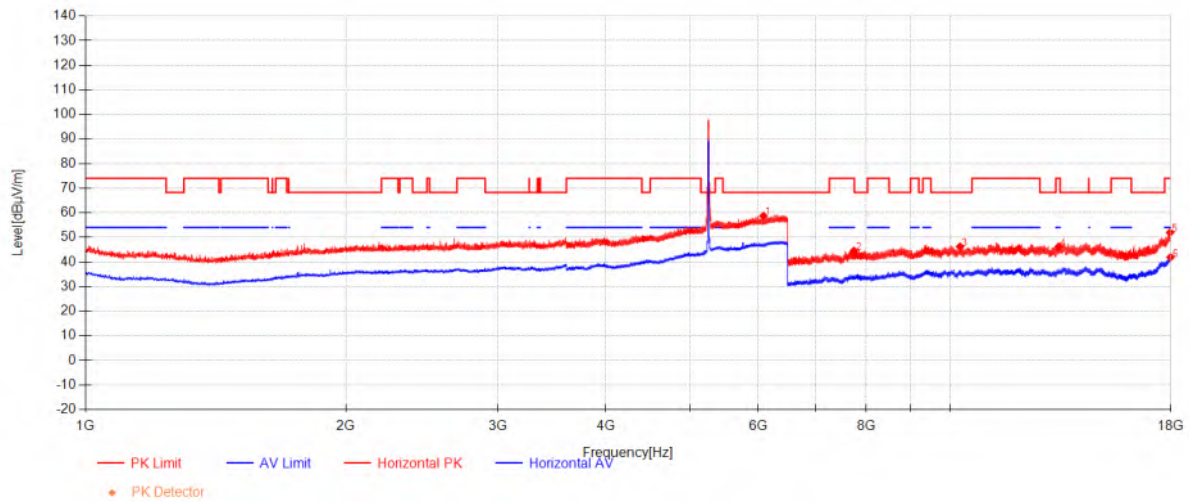


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6083.2692	41.98	33.12	-16.39	58.71	68.30	9.59	Horizontal
2	7739.6042	53.18	36.35	-45.04	44.49	74.00	29.51	Horizontal
3	10266.25	48.66	38.99	-41.42	46.23	68.30	22.07	Horizontal
4	13348.729	45.64	39.32	-38.77	46.19	74.00	27.81	Horizontal
5	17960.229	44.48	44.56	-37.09	51.95	74.00	22.05	Horizontal
6	17979.395	34.26	44.68	-37.04	41.90	54.00	12.10	Horizontal

11ac(VHT20)_TX_CH_52_Vertical

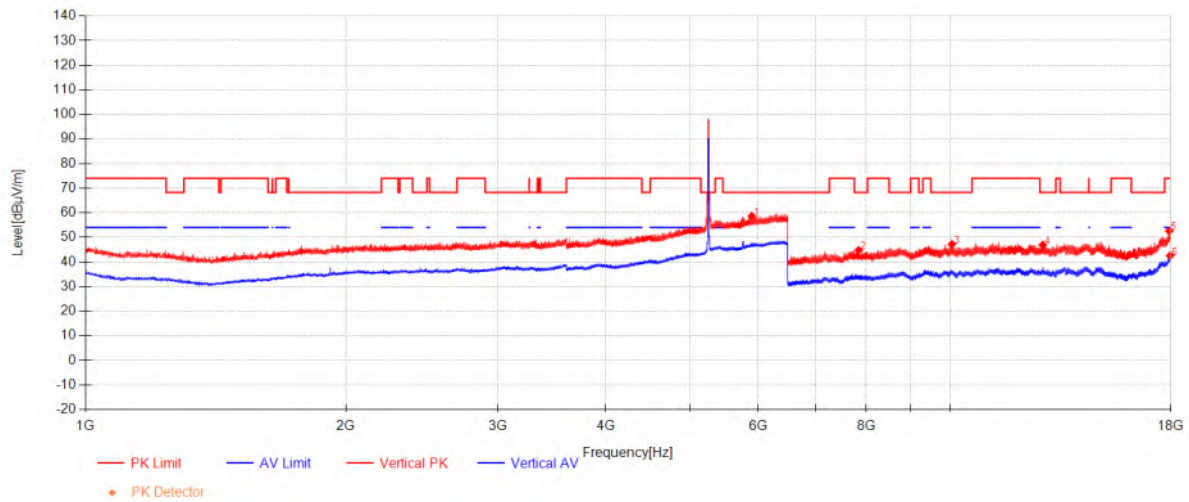


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5896.2692	41.91	32.76	-16.03	58.64	68.30	9.66	Vertical
2	7836.875	53.41	36.33	-44.93	44.82	68.30	23.48	Vertical
3	10044.395	50.03	38.83	-41.69	47.17	68.30	21.13	Vertical
4	12794.333	47.23	38.92	-39.26	46.89	68.30	21.41	Vertical
5	17919.979	45.48	44.32	-37.20	52.60	74.00	21.40	Vertical
6	17962.625	35.09	44.58	-37.08	42.58	54.00	11.42	Vertical

11ac(VHT20)_TX_CH_60_Horizontal

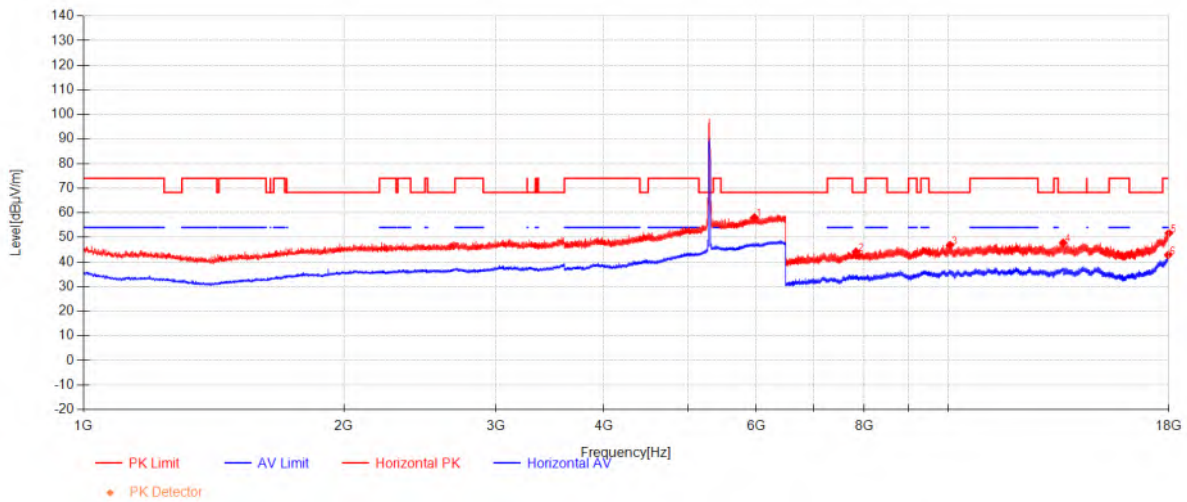


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5971.1538	41.26	32.79	-15.97	58.08	68.30	10.22	Horizontal
2	7824.8958	52.73	36.34	-44.92	44.15	68.30	24.15	Horizontal
3	10049.187	49.69	38.83	-41.69	46.84	68.30	21.46	Horizontal
4	13582.083	46.52	39.67	-38.40	47.79	68.30	20.51	Horizontal
5	17996.166	43.89	44.78	-36.99	51.68	74.00	22.32	Horizontal
6	17963.583	35.33	44.58	-37.08	42.83	54.00	11.17	Horizontal

11ac(VHT20)_TX_CH_60_Vertical

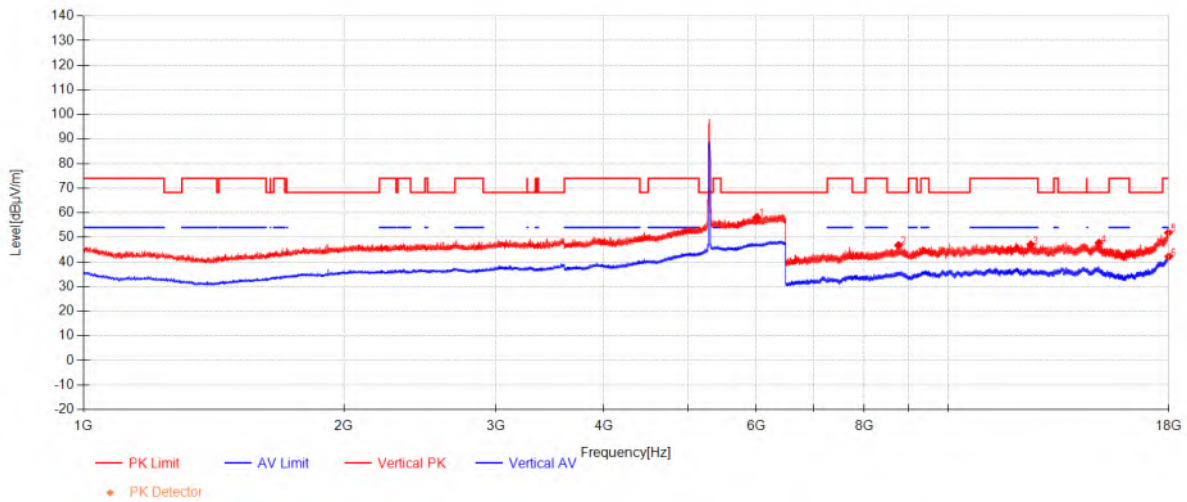


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6010.5	41.39	32.84	-16.01	58.22	68.30	10.08	Vertical
2	8761.1875	53.42	37.14	-43.79	46.76	68.30	21.54	Vertical
3	12458.916	46.53	39.12	-38.60	47.05	74.00	26.95	Vertical
4	14939.083	45.69	40.21	-38.20	47.70	68.30	20.60	Vertical
5	17973.645	44.27	44.64	-37.05	51.86	74.00	22.14	Vertical
6	17989.937	34.43	44.74	-37.01	42.16	54.00	11.84	Vertical

11ac(VHT20)_TX_CH_64_Horizontal

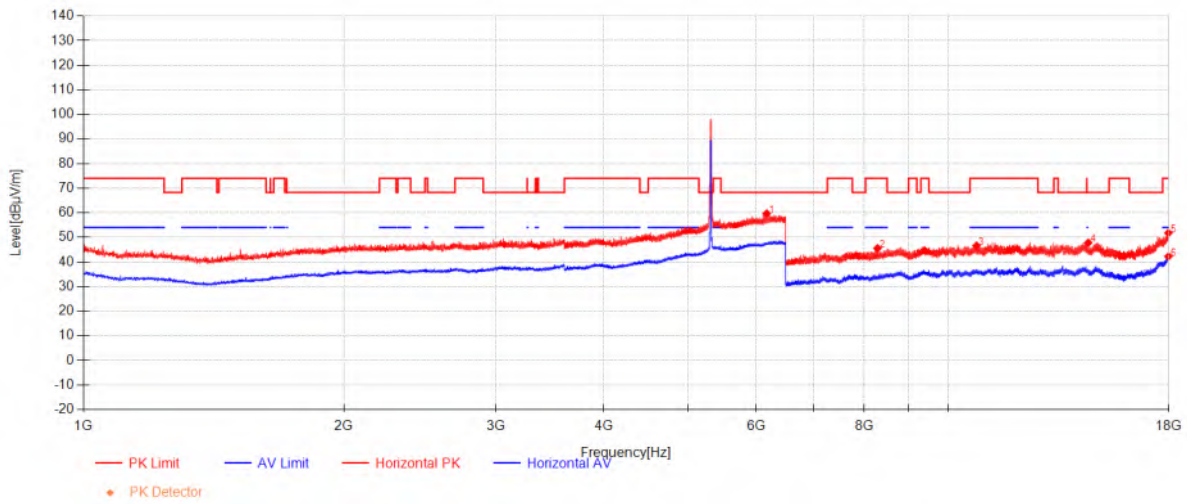


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6168.7308	42.43	33.44	-16.20	59.67	68.30	8.63	Horizontal
2	8285.375	53.43	36.61	-44.51	45.53	74.00	28.47	Horizontal
3	10785.666	47.77	39.35	-40.50	46.62	74.00	27.38	Horizontal
4	14521.729	45.85	40.25	-38.29	47.80	68.30	20.50	Horizontal
5	17972.208	44.19	44.63	-37.06	51.77	74.00	22.23	Horizontal
6	17974.125	34.65	44.64	-37.05	42.24	54.00	11.76	Horizontal

11ac(VHT20)_TX_CH_64_Vertical

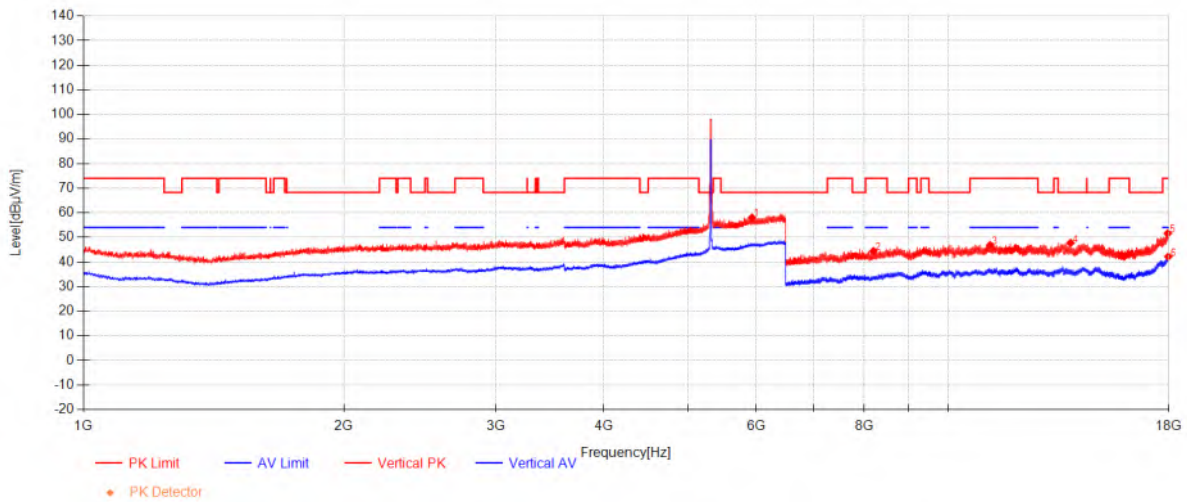


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5932.6538	41.24	32.77	-15.99	58.02	68.30	10.28	Vertical
2	8195.7708	52.13	36.52	-44.23	44.42	74.00	29.58	Vertical
3	11181.937	47.33	39.48	-39.98	46.83	74.00	27.17	Vertical
4	13851.854	46.05	40.08	-38.43	47.70	68.30	20.60	Vertical
5	17944.416	44.26	44.47	-37.14	51.59	74.00	22.41	Vertical
6	17969.812	34.62	44.62	-37.06	42.17	54.00	11.83	Vertical

11ac(VHT20)_TX_CH_100_Horizontal

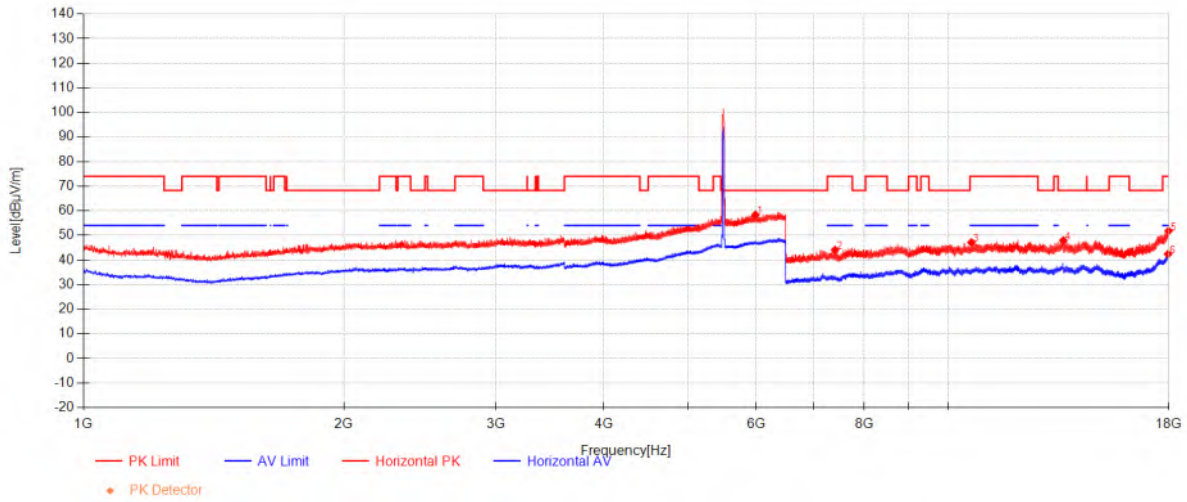


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5986.8077	41.53	32.79	-15.96	58.37	68.30	9.93	Horizontal
2	7398.4375	53.41	36.22	-45.57	44.06	74.00	29.94	Horizontal
3	10638.562	48.90	39.25	-41.04	47.10	74.00	26.90	Horizontal
4	13587.833	46.60	39.68	-38.36	47.92	68.30	20.38	Horizontal
5	17985.145	44.12	44.71	-37.02	51.81	74.00	22.19	Horizontal
6	17957.354	34.95	44.54	-37.10	42.39	54.00	11.61	Horizontal

11ac(VHT20)_TX_CH_100_Vertical

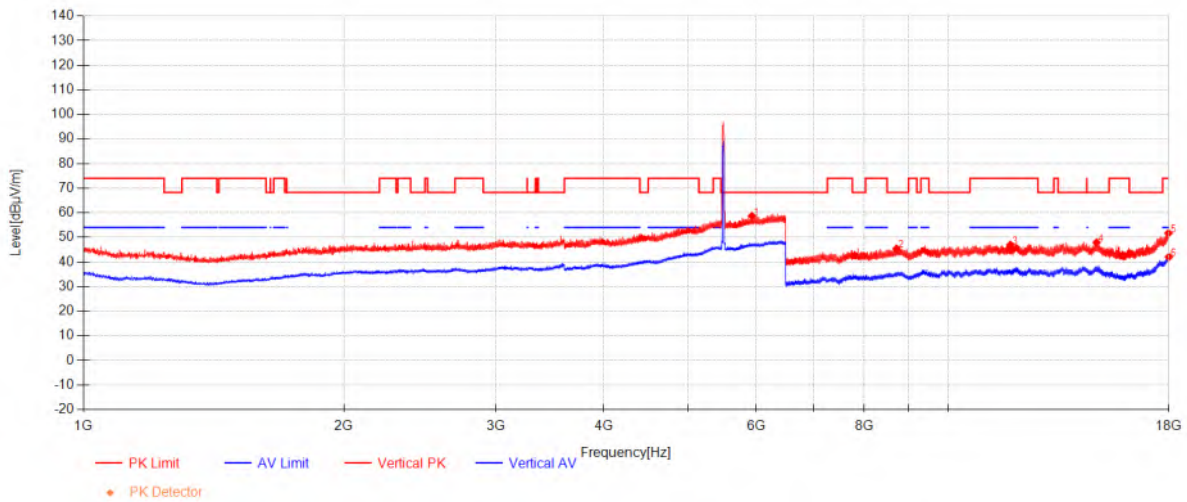


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5930.5385	41.90	32.77	-15.99	58.68	68.30	9.62	Vertical
2	8715.6667	51.99	37.09	-43.72	45.36	68.30	22.94	Vertical
3	11800.062	46.77	39.42	-39.24	46.95	74.00	27.05	Vertical
4	14844.687	45.63	40.22	-37.92	47.92	68.30	20.38	Vertical
5	17977.958	44.06	44.67	-37.04	51.69	74.00	22.31	Vertical
6	17996.166	34.23	44.78	-36.99	42.02	54.00	11.98	Vertical

11ac(VHT20)_TX_CH_116_Horizontal

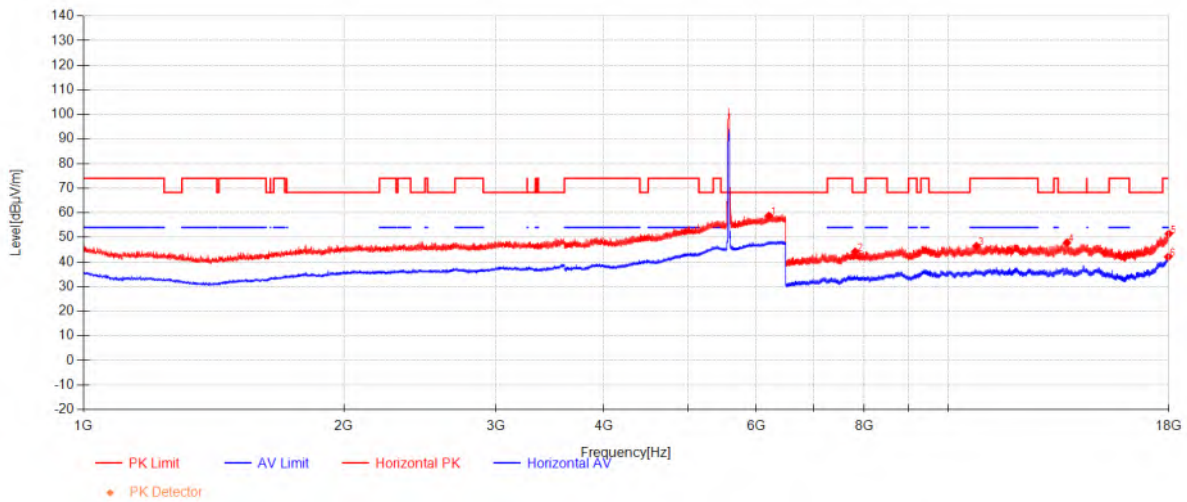


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6205.5385	41.27	33.58	-16.08	58.77	68.30	9.53	Horizontal
2	7806.6875	52.69	36.34	-44.90	44.12	68.30	24.18	Horizontal
3	10779.916	47.61	39.35	-40.52	46.43	74.00	27.57	Horizontal
4	13720.083	45.98	39.88	-38.06	47.80	68.30	20.50	Horizontal
5	17995.208	43.67	44.77	-36.99	51.45	74.00	22.55	Horizontal
6	17964.062	34.56	44.58	-37.08	42.06	54.00	11.94	Horizontal

11ac(VHT20)_TX_CH_116_Vertical

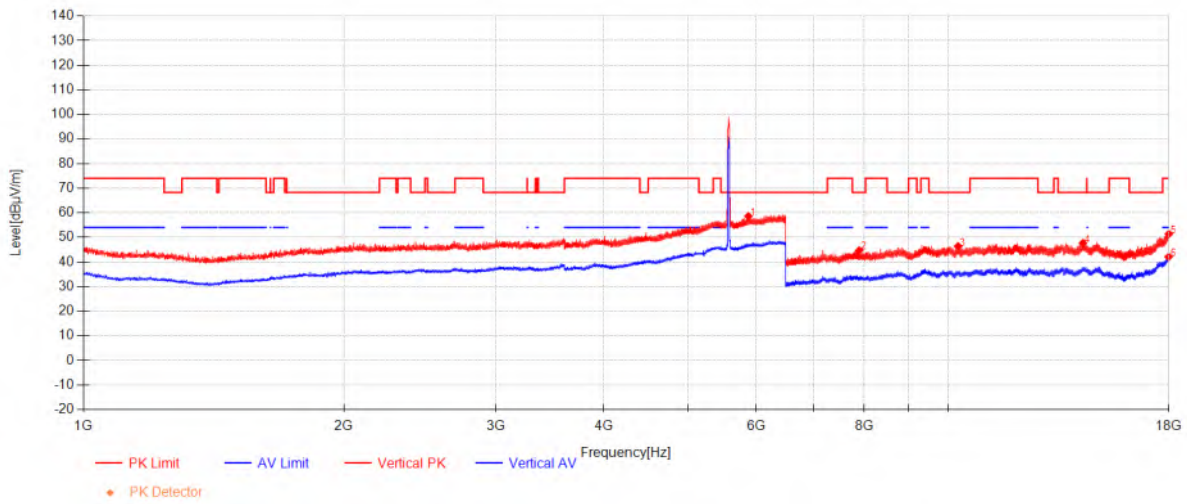


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5875.1154	42.00	32.75	-16.15	58.60	68.30	9.70	Vertical
2	7891.0208	53.33	36.32	-44.96	44.69	68.30	23.61	Vertical
3	10266.25	48.79	38.99	-41.42	46.36	68.30	21.94	Vertical
4	14317.125	46.16	40.27	-38.77	47.66	68.30	20.64	Vertical
5	17995.687	43.59	44.77	-36.99	51.37	74.00	22.63	Vertical
6	17981.791	34.41	44.69	-37.03	42.07	54.00	11.93	Vertical

11ac(VHT20)_TX_CH_140_Horizontal

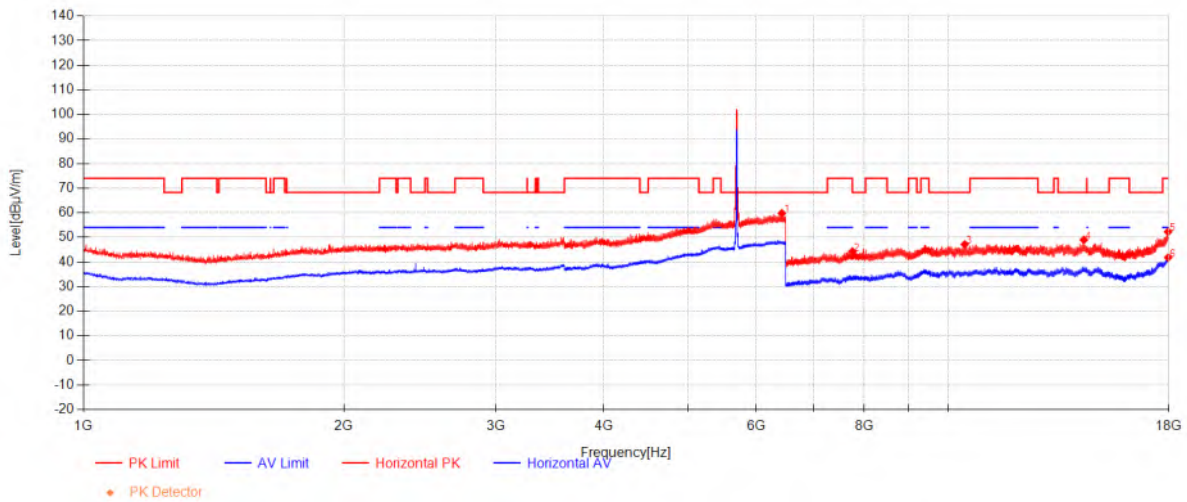


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6423.8462	41.67	34.41	-16.30	59.78	68.30	8.52	Horizontal
2	7749.1875	52.91	36.35	-45.02	44.24	74.00	29.76	Horizontal
3	10449.770	48.93	39.11	-40.91	47.13	68.30	21.17	Horizontal
4	14351.145	47.44	40.26	-38.74	48.96	68.30	19.34	Horizontal
5	17956.875	44.81	44.54	-37.10	52.25	74.00	21.75	Horizontal
6	17961.187	34.32	44.57	-37.09	41.80	54.00	12.20	Horizontal

11ac(VHT20)_TX_CH_140_Vertical

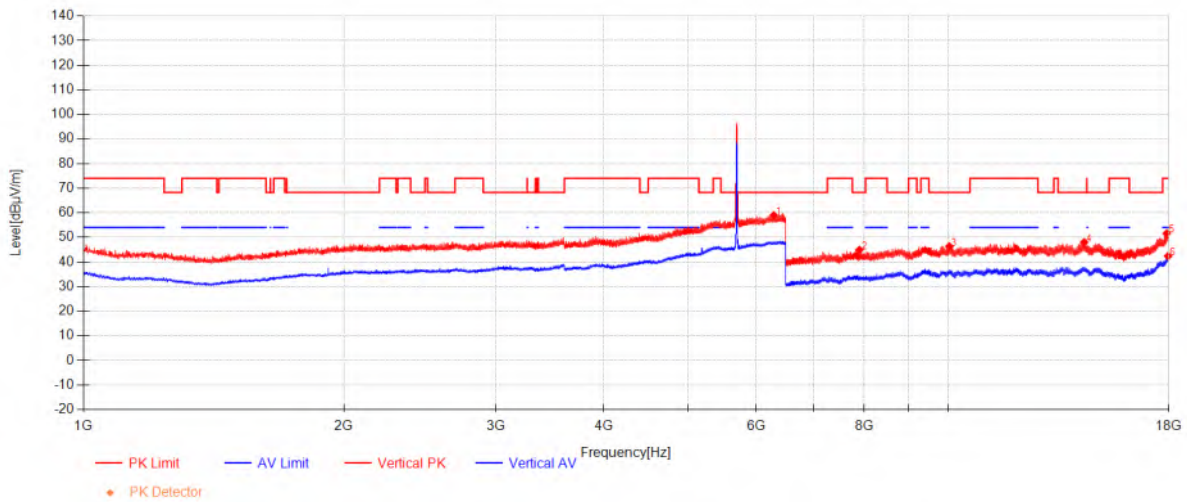


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6285.5	41.28	33.88	-16.21	58.96	68.30	9.34	Vertical
2	7894.8542	53.55	36.32	-44.97	44.90	68.30	23.40	Vertical
3	10030.979	49.21	38.82	-41.71	46.33	68.30	21.97	Vertical
4	14365.520	46.45	40.26	-38.73	47.98	68.30	20.32	Vertical
5	17893.145	44.71	44.16	-37.31	51.56	74.00	22.44	Vertical
6	17958.312	34.91	44.55	-37.10	42.36	54.00	11.64	Vertical

11ac(VHT20)_TX_CH_149_Horizontal

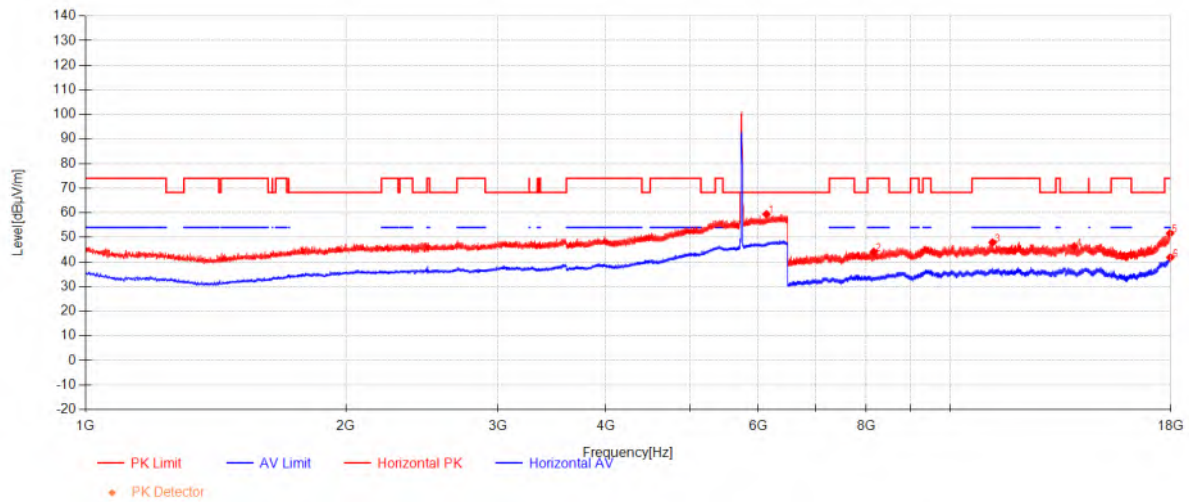


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6131.9231	42.48	33.30	-16.35	59.43	68.30	8.87	Horizontal
2	8159.3542	51.92	36.48	-44.31	44.09	74.00	29.91	Horizontal
3	11194.395	48.38	39.48	-39.96	47.90	74.00	26.10	Horizontal
4	13913.666	44.58	40.17	-38.45	46.30	68.30	22.00	Horizontal
5	17956.395	44.18	44.54	-37.10	51.62	74.00	22.38	Horizontal
6	17976.041	34.23	44.66	-37.05	41.84	54.00	12.16	Horizontal

11ac(VHT20)_TX_CH_149_Vertical

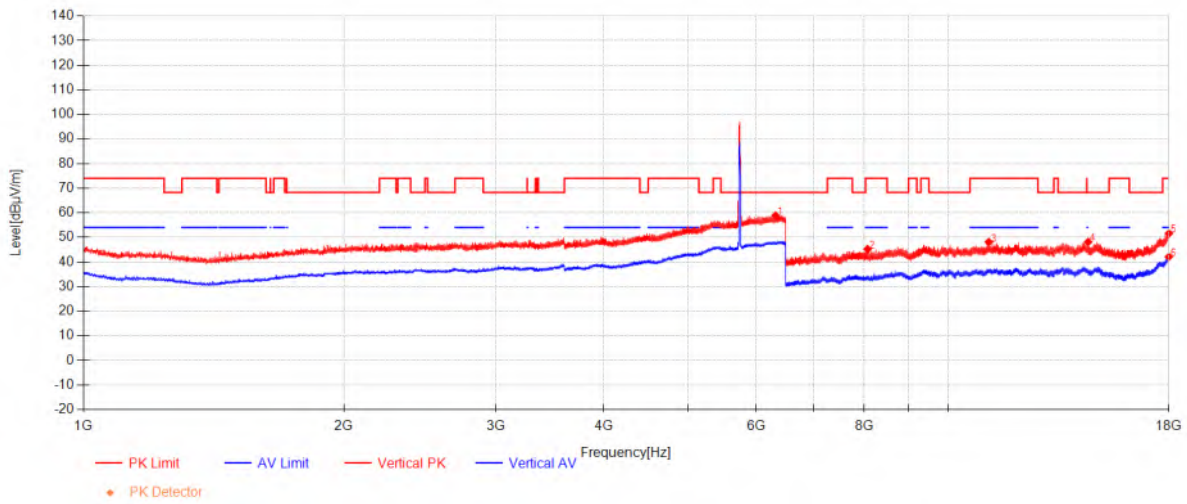


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6315.9615	41.09	34.00	-16.22	58.87	68.30	9.43	Vertical
2	8067.8333	53.20	36.37	-44.38	45.20	74.00	28.80	Vertical
3	11141.687	48.65	39.49	-40.04	48.09	74.00	25.91	Vertical
4	14515.979	46.16	40.25	-38.31	48.10	68.30	20.20	Vertical
5	17996.645	43.76	44.78	-36.99	51.55	74.00	22.45	Vertical
6	17994.25	34.31	44.77	-37.00	42.08	54.00	11.92	Vertical

11ac(VHT20)_TX_CH_157_Horizontal

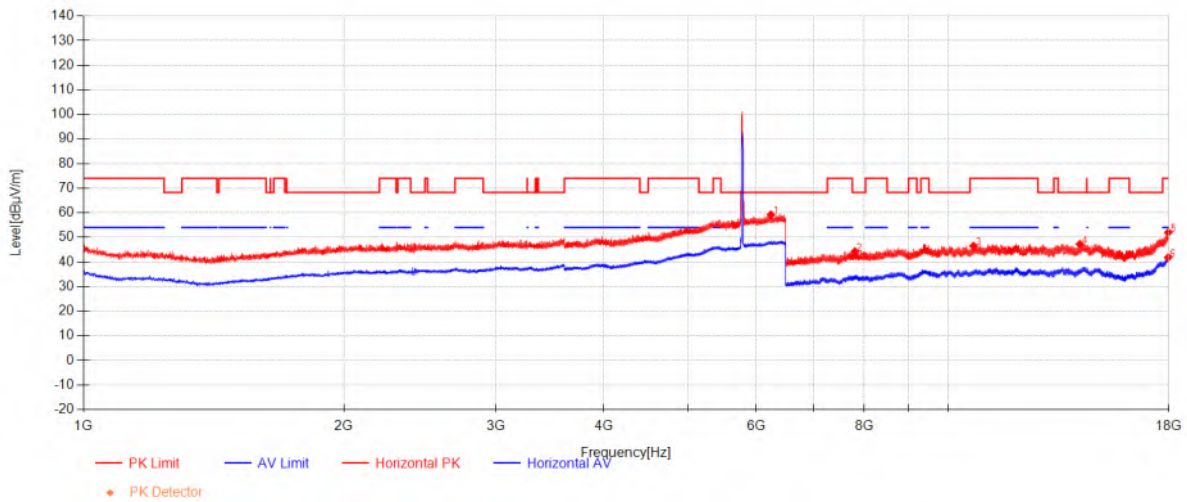


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6238.5385	41.68	33.71	-16.13	59.25	68.30	9.05	Horizontal
2	7800.9375	52.80	36.34	-44.90	44.24	68.30	24.06	Horizontal
3	10697.5	48.01	39.29	-40.82	46.48	74.00	27.52	Horizontal
4	14201.166	45.10	40.28	-38.16	47.22	68.30	21.08	Horizontal
5	17970.291	44.45	44.62	-37.06	52.01	74.00	21.99	Horizontal
6	17965.020	34.32	44.59	-37.08	41.83	54.00	12.17	Horizontal

11ac(VHT20)_TX_CH_157_Vertical

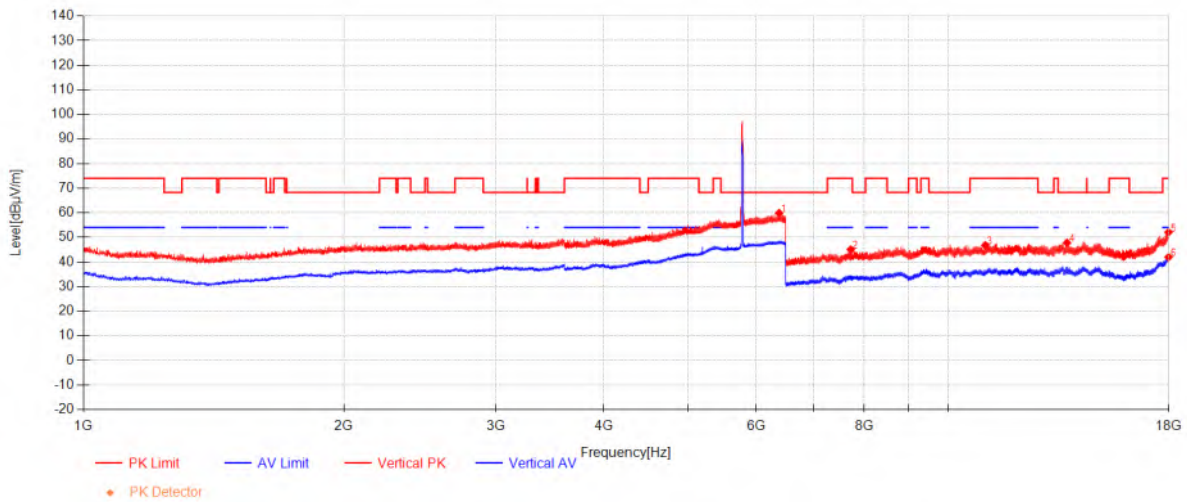


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6376.4615	41.82	34.23	-16.17	59.88	68.30	8.42	Vertical
2	7715.1667	53.79	36.36	-45.10	45.04	74.00	28.96	Vertical
3	11038.187	47.66	39.50	-40.36	46.79	74.00	27.21	Vertical
4	13723.437	46.00	39.89	-38.08	47.80	68.30	20.50	Vertical
5	17978.437	44.42	44.67	-37.04	52.05	74.00	21.95	Vertical
6	17981.791	34.28	44.69	-37.03	41.94	54.00	12.06	Vertical

11ac(VHT20)_TX_CH_165_Horizontal

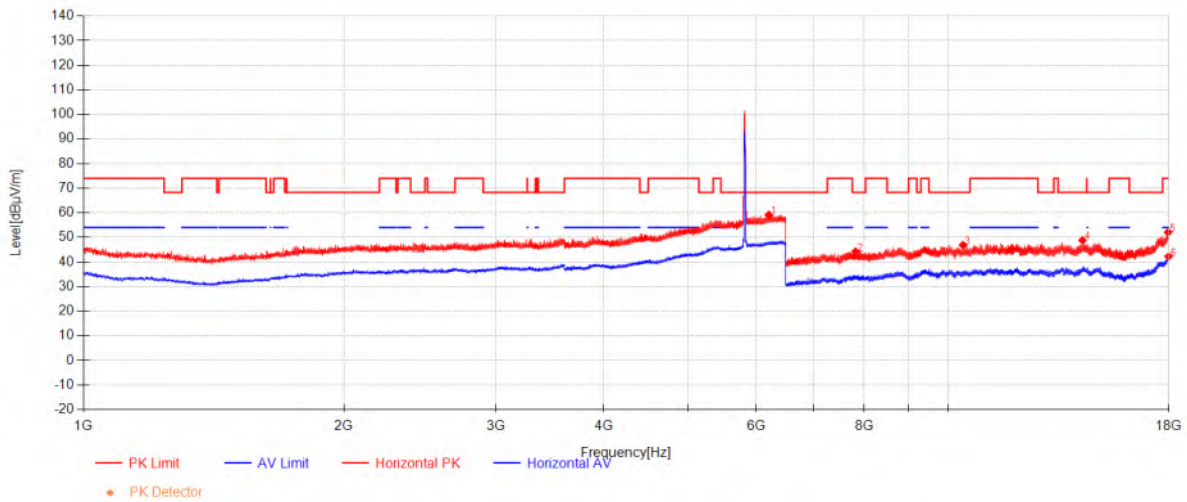


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6204.2692	41.65	33.58	-16.08	59.15	68.30	9.15	Horizontal
2	7813.3958	52.77	36.34	-44.91	44.20	68.30	24.10	Horizontal
3	10403.770	48.99	39.08	-41.22	46.85	68.30	21.45	Horizontal
4	14299.875	47.33	40.27	-38.78	48.82	68.30	19.48	Horizontal
5	17960.708	44.59	44.56	-37.09	52.06	74.00	21.94	Horizontal
6	17978.437	34.57	44.67	-37.04	42.20	54.00	11.80	Horizontal

11ac(VHT20)_TX_CH_165_Vertical

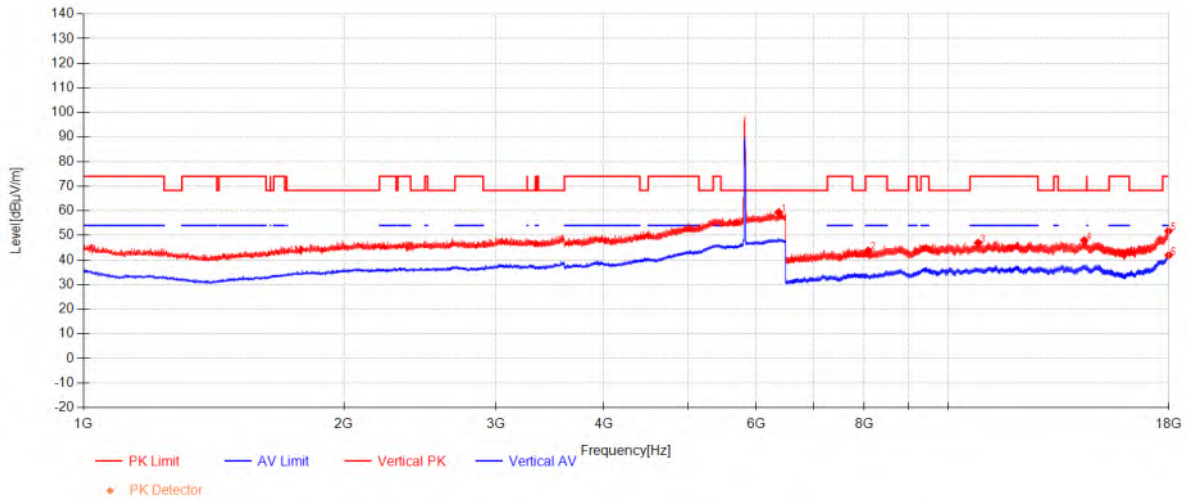


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6370.5385	41.35	34.21	-16.17	59.38	68.30	8.92	Vertical
2	8081.7292	51.71	36.39	-44.40	43.70	74.00	30.30	Vertical
3	10831.666	47.89	39.38	-40.36	46.91	74.00	27.09	Vertical
4	14368.395	46.39	40.26	-38.73	47.92	68.30	20.38	Vertical
5	17976.041	44.11	44.66	-37.05	51.72	74.00	22.28	Vertical
6	17987.541	34.21	44.73	-37.01	41.92	54.00	12.08	Vertical

11ac(VHT40)_TX_CH_38_Horizontal

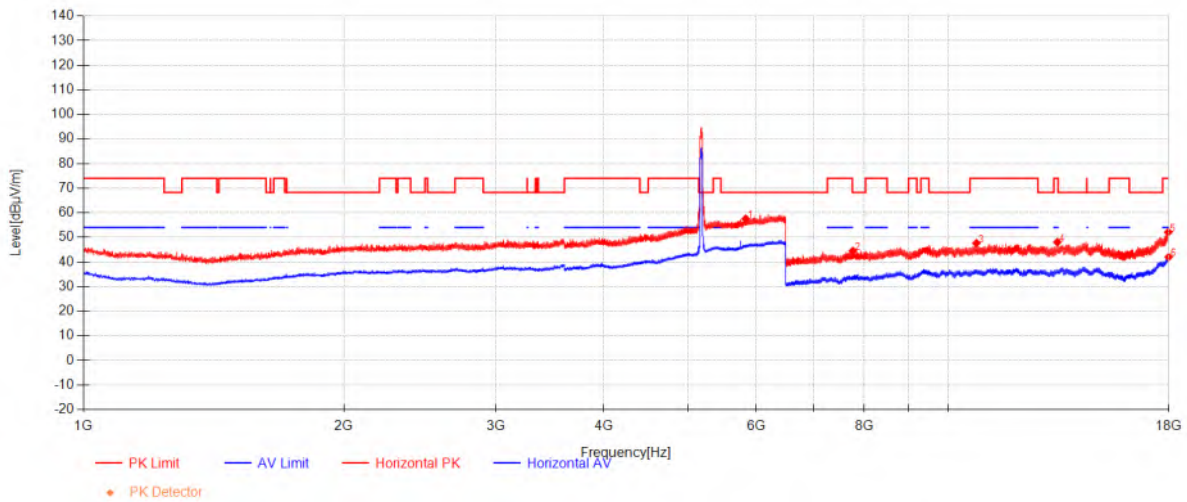


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5833.2308	41.20	32.73	-16.38	57.56	68.30	10.74	Horizontal
2	7758.2917	53.13	36.35	-45.00	44.48	68.30	23.82	Horizontal
3	10780.875	48.82	39.35	-40.52	47.65	74.00	26.35	Horizontal
4	13373.645	47.58	39.36	-38.90	48.04	74.00	25.96	Horizontal
5	17965.5	44.57	44.59	-37.08	52.09	74.00	21.91	Horizontal
6	17988.020	34.30	44.73	-37.01	42.01	54.00	11.99	Horizontal

11ac(VHT40)_TX_CH_38_Vertical

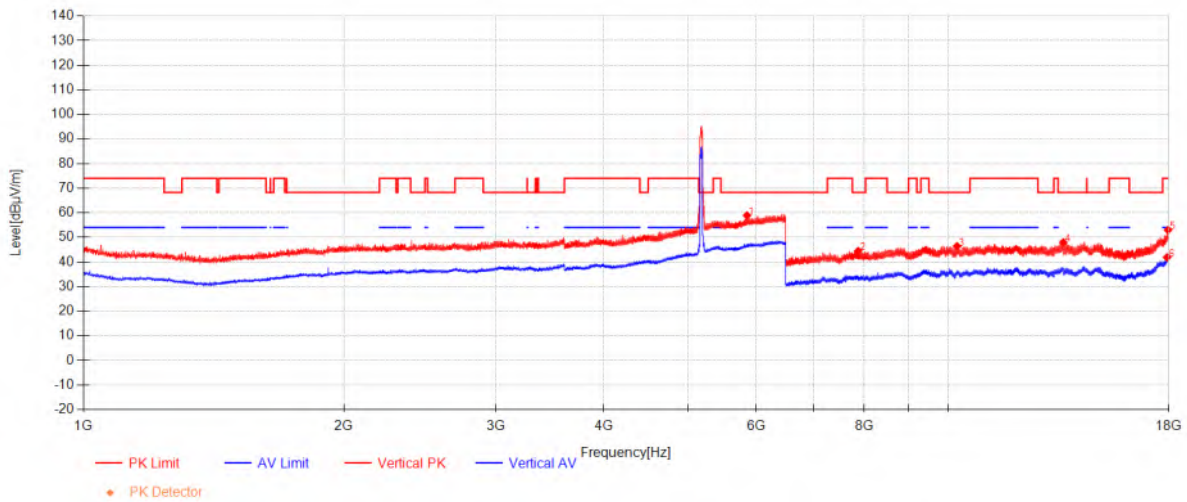


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5852.6923	42.43	32.74	-16.27	58.90	68.30	9.40	Vertical
2	7868.9792	53.06	36.33	-44.95	44.44	68.30	23.86	Vertical
3	10238.937	49.09	38.97	-41.69	46.37	68.30	21.93	Vertical
4	13584.479	46.64	39.68	-38.39	47.93	68.30	20.37	Vertical
5	17953.520	45.52	44.52	-37.11	52.93	74.00	21.07	Vertical
6	17910.875	34.82	44.27	-37.23	41.86	54.00	12.14	Vertical

11ac(VHT40)_TX_CH_46_Horizontal

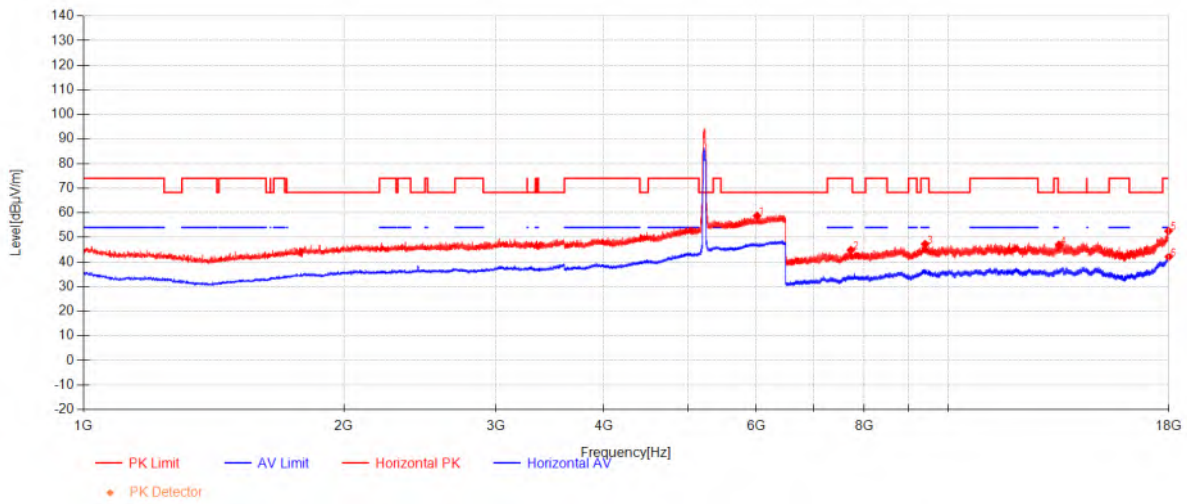

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6013.0385	41.93	32.85	-16.02	58.76	68.30	9.54	Horizontal
2	7719.9583	53.59	36.36	-45.09	44.85	74.00	29.15	Horizontal
3	9404.2292	52.08	37.97	-42.80	47.24	74.00	26.76	Horizontal
4	13430.187	46.56	39.45	-39.02	46.99	68.30	21.31	Horizontal
5	17979.875	44.92	44.68	-37.04	52.56	74.00	21.44	Horizontal
6	17990.416	34.33	44.74	-37.01	42.07	54.00	11.93	Horizontal


11ac(VHT40)_TX_CH_46_Vertical

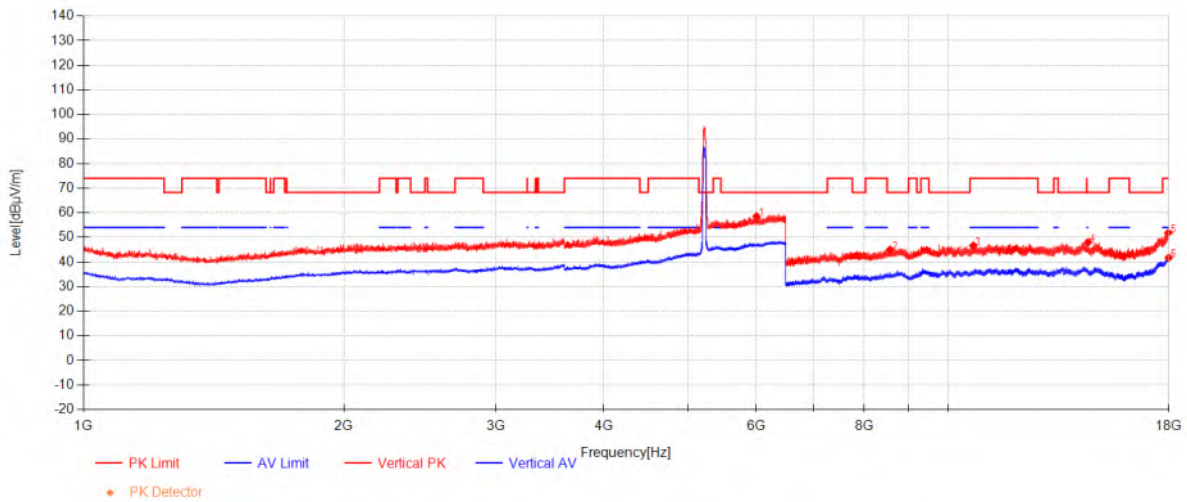

Data List


NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6005.4231	41.69	32.82	-15.98	58.53	68.30	9.77	Vertical
2	8566.1667	52.01	36.92	-43.98	44.96	68.30	23.34	Vertical
3	10692.229	48.16	39.28	-40.84	46.61	74.00	27.39	Vertical
4	14513.104	46.07	40.25	-38.31	48.01	68.30	20.29	Vertical
5	17969.333	44.27	44.62	-37.07	51.82	74.00	22.18	Vertical
6	17988.020	33.99	44.73	-37.01	41.70	54.00	12.30	Vertical

11ac(VHT40)_TX_CH_52_Horizontal

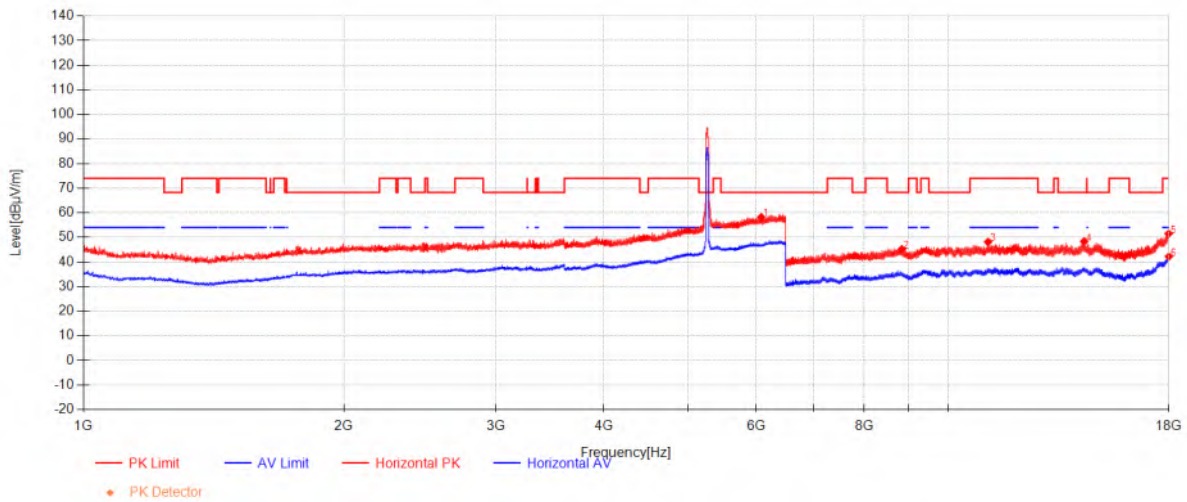

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6079.8846	41.48	33.10	-16.37	58.21	68.30	10.09	Horizontal
2	8839.2917	51.70	37.22	-43.74	45.19	68.30	23.11	Horizontal
3	11121.083	48.72	39.49	-40.08	48.13	74.00	25.87	Horizontal
4	14366.479	46.81	40.26	-38.73	48.34	68.30	19.96	Horizontal
5	17984.187	43.80	44.71	-37.02	51.48	74.00	22.52	Horizontal
6	17992.333	34.43	44.75	-37.00	42.18	54.00	11.82	Horizontal


11ac(VHT40)_TX_CH_52_Vertical

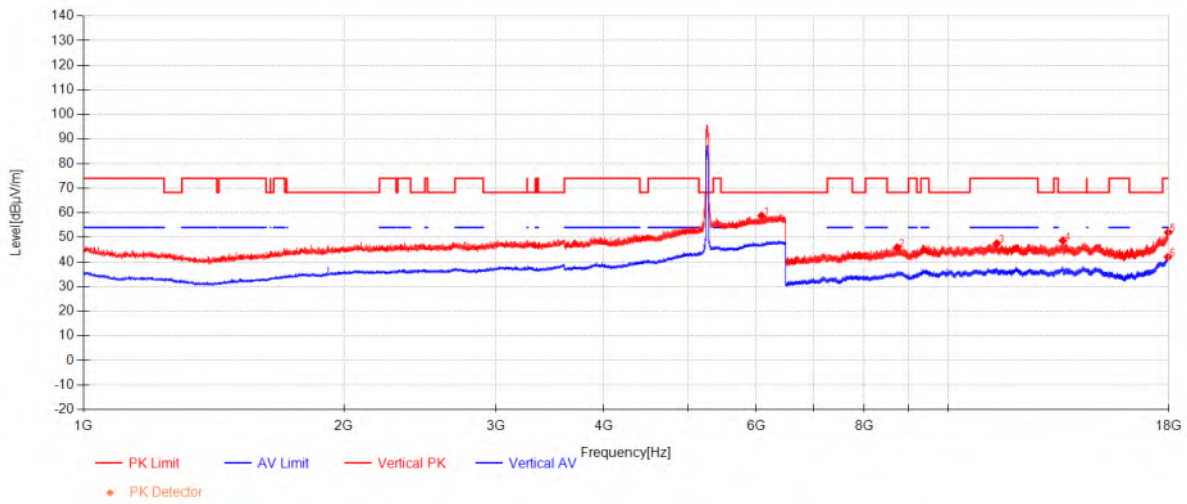

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6085.3846	42.09	33.12	-16.40	58.81	68.30	9.49	Vertical
2	8733.3958	52.53	37.11	-43.75	45.89	68.30	22.41	Vertical
3	11382.229	47.85	39.46	-39.84	47.47	74.00	26.53	Vertical
4	13568.666	47.50	39.65	-38.49	48.66	68.30	19.64	Vertical
5	17965.979	44.52	44.60	-37.08	52.04	74.00	21.96	Vertical
6	17951.125	34.57	44.51	-37.12	41.96	54.00	12.04	Vertical




11ac(VHT40)_TX_CH_62_Horizontal

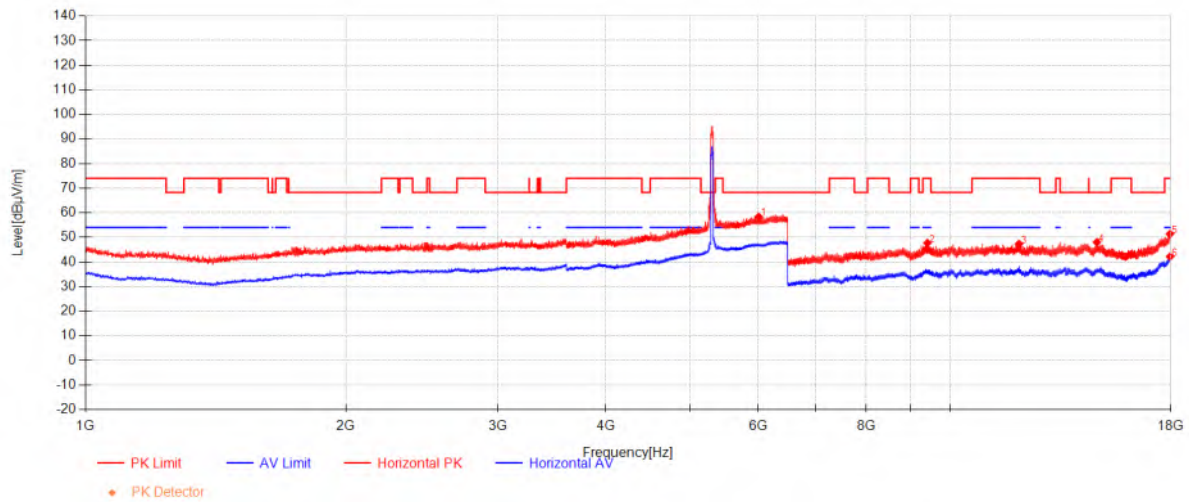


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6006.2692	41.53	32.82	-15.98	58.37	68.30	9.93	Horizontal
2	9411.8958	52.51	37.98	-42.79	47.70	74.00	26.30	Horizontal
3	12007.541	46.55	39.40	-38.62	47.32	74.00	26.68	Horizontal
4	14779.520	45.47	40.22	-37.67	48.02	68.30	20.28	Horizontal
5	17955.437	43.95	44.53	-37.10	51.38	74.00	22.62	Horizontal
6	17957.354	34.72	44.54	-37.10	42.16	54.00	11.84	Horizontal

11ac(VHT40)_TX_CH_62_Vertical

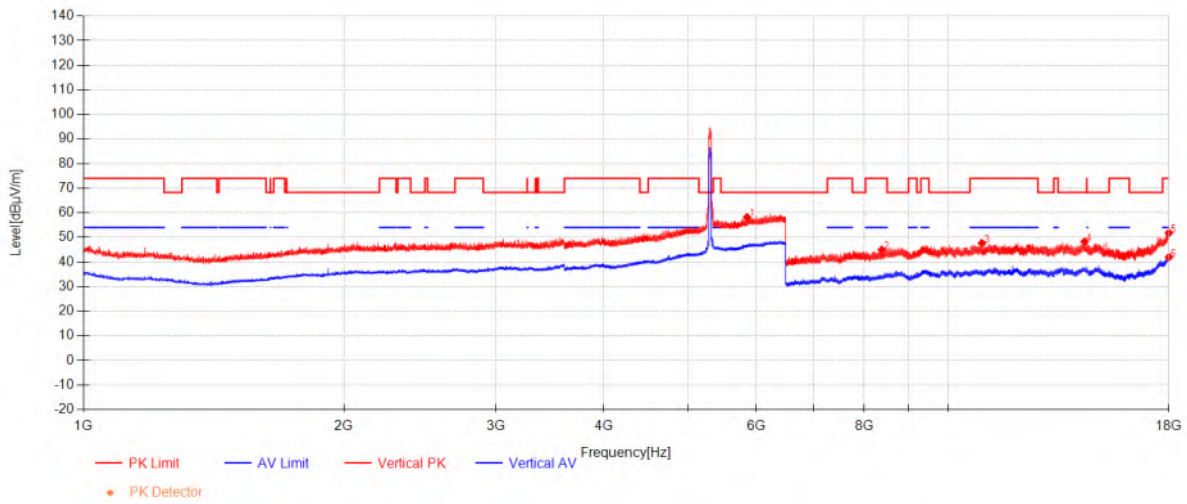


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5855.2308	41.71	32.74	-16.26	58.20	68.30	10.10	Vertical
2	8381.2083	52.61	36.72	-44.40	44.93	74.00	29.07	Vertical
3	10940.437	48.46	39.46	-40.31	47.61	74.00	26.39	Vertical
4	14379.895	46.72	40.26	-38.72	48.26	68.30	20.04	Vertical
5	17996.166	44.00	44.78	-36.99	51.79	74.00	22.21	Vertical
6	17999.520	34.11	44.80	-36.98	41.93	54.00	12.07	Vertical

11ac(VHT40)_TX_CH_102_Horizontal

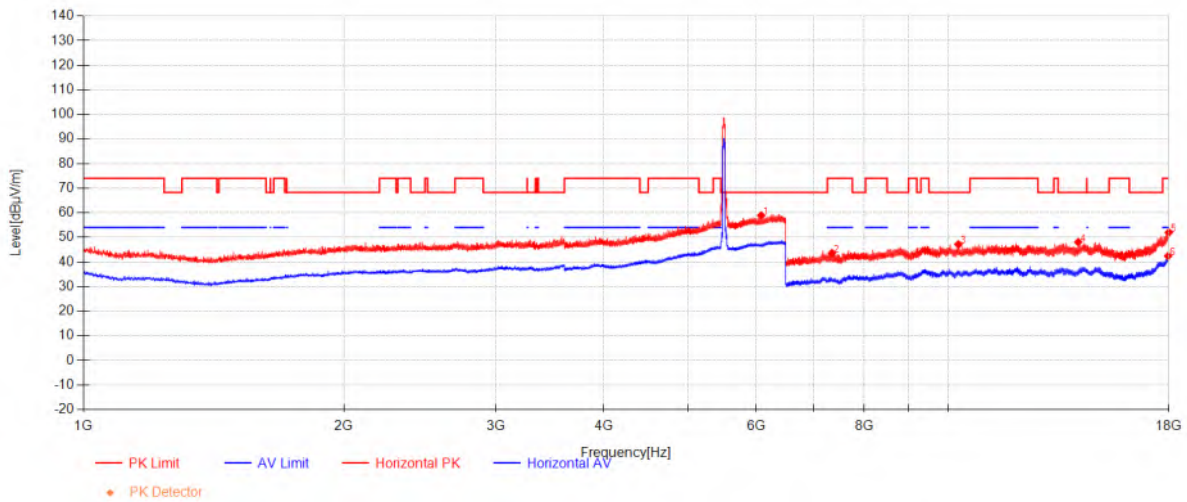

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6080.3077	42.15	33.11	-16.38	58.88	68.30	9.42	Horizontal
2	7339.0208	53.33	36.11	-45.83	43.61	74.00	30.39	Horizontal
3	10275.833	49.47	38.99	-41.32	47.14	68.30	21.16	Horizontal
4	14136.479	46.31	40.29	-38.52	48.07	68.30	20.23	Horizontal
5	17996.166	44.20	44.78	-36.99	51.99	74.00	22.01	Horizontal
6	17958.791	34.91	44.55	-37.10	42.37	54.00	11.63	Horizontal

11ac(VHT40)_TX_CH_102_Vertical

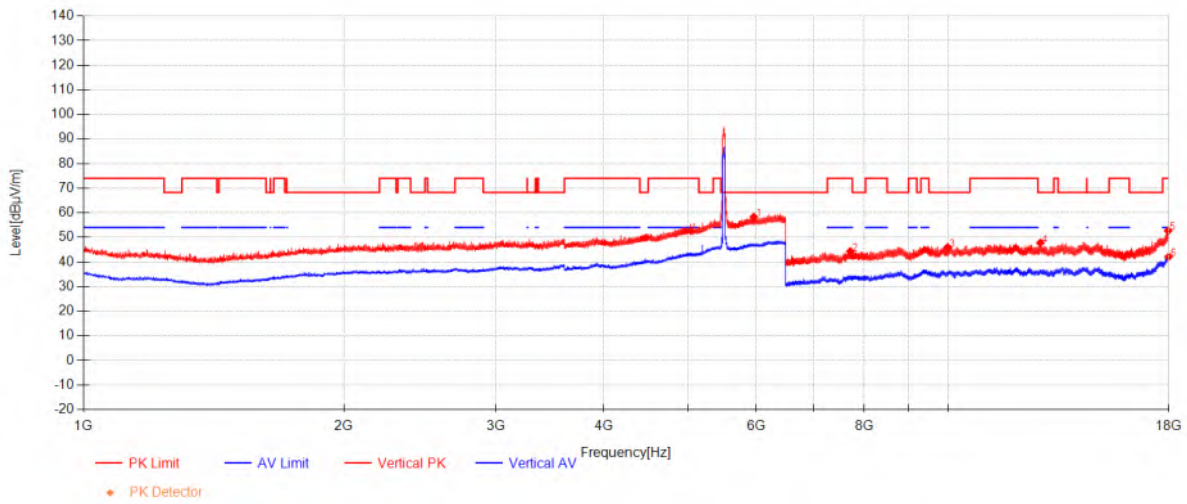


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5961	41.52	32.78	-15.97	58.33	68.30	9.97	Vertical
2	7705.5833	53.08	36.36	-45.13	44.31	74.00	29.69	Vertical
3	9987.375	48.96	38.78	-41.75	45.99	68.30	22.31	Vertical
4	12780.916	48.04	38.93	-39.23	47.74	68.30	20.56	Vertical
5	17960.708	45.19	44.56	-37.09	52.66	74.00	21.34	Vertical
6	17983.229	34.43	44.70	-37.03	42.10	54.00	11.90	Vertical



Report No.: KSCR260100024804


Page: 80 of 283

11ac(VHT40)_TX_CH_110_Horizontal

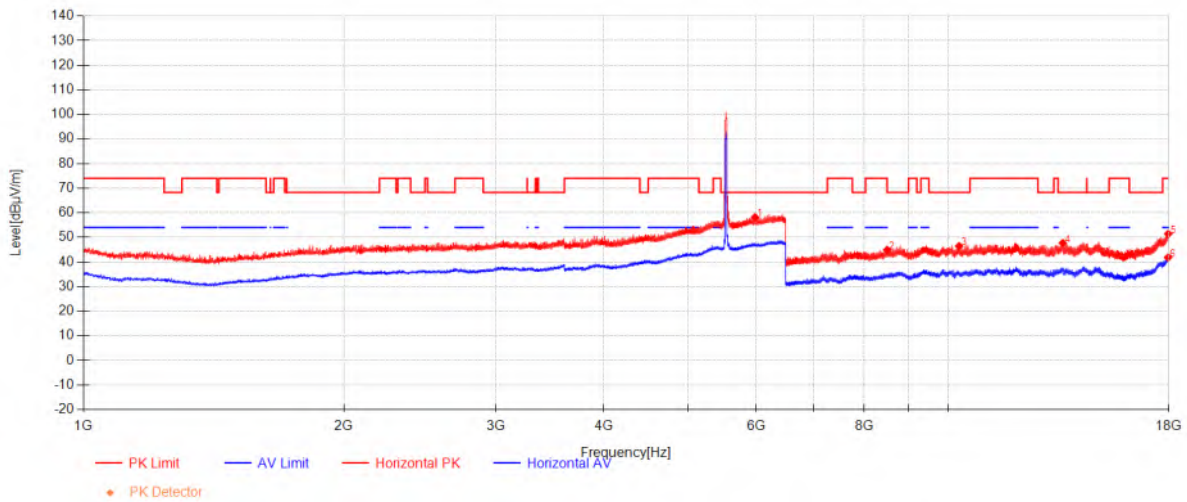


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5980.0385	41.34	32.79	-15.96	58.17	68.30	10.13	Horizontal
2	8501	51.74	36.85	-43.68	44.91	68.30	23.39	Horizontal
3	10295.958	48.53	39.01	-41.12	46.42	68.30	21.88	Horizontal
4	13567.708	46.53	39.65	-38.50	47.68	68.30	20.62	Horizontal
5	17966.937	43.90	44.60	-37.07	51.43	74.00	22.57	Horizontal
6	17958.791	34.36	44.55	-37.10	41.82	54.00	12.18	Horizontal

11ac(VHT40)_TX_CH_110_Vertical

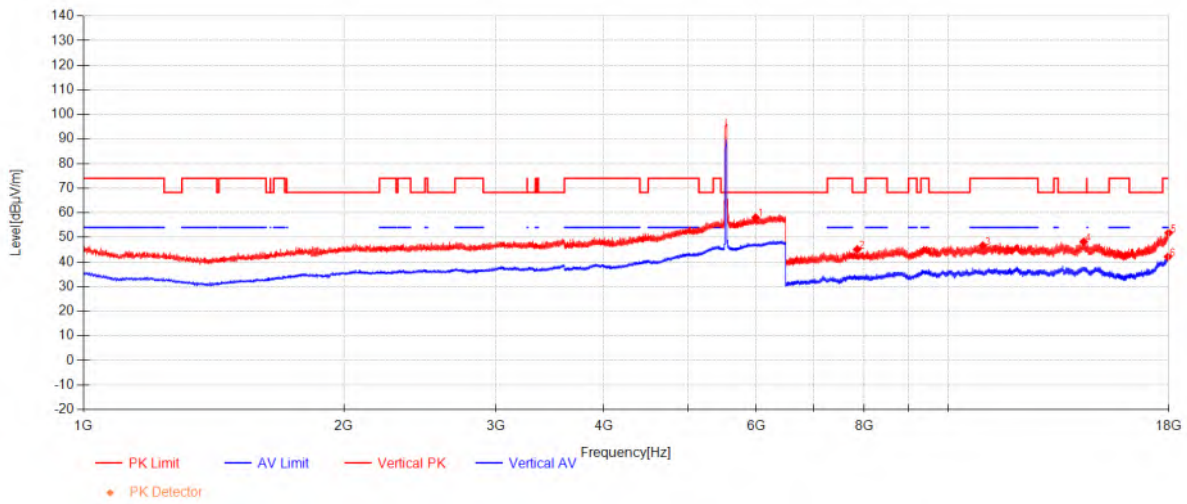


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5990.6154	41.21	32.80	-15.96	58.05	68.30	10.25	Vertical
2	7849.3333	53.72	36.33	-44.93	45.12	68.30	23.18	Vertical
3	10966.791	47.54	39.48	-40.40	46.61	74.00	27.39	Vertical
4	14346.354	46.68	40.27	-38.75	48.20	68.30	20.10	Vertical
5	17989.458	44.09	44.74	-37.01	51.82	74.00	22.18	Vertical
6	17951.604	34.67	44.51	-37.12	42.06	54.00	11.94	Vertical

11ac(VHT40)_TX_CH_134_Horizontal

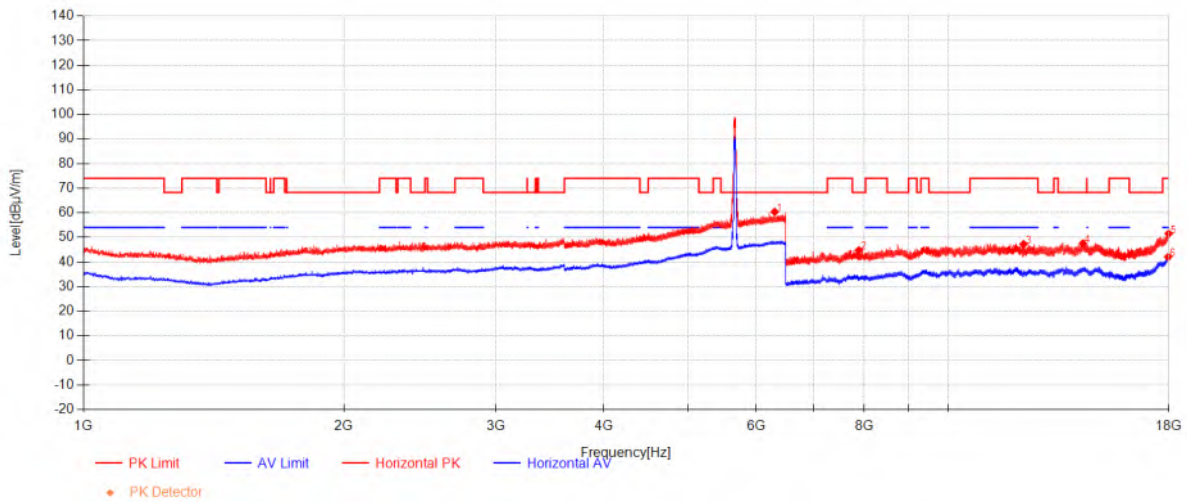


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6301.5769	42.65	33.95	-16.23	60.37	68.30	7.93	Horizontal
2	7884.7917	53.40	36.32	-44.96	44.76	68.30	23.54	Horizontal
3	12226.041	47.60	39.26	-39.63	47.24	74.00	26.76	Horizontal
4	14315.208	46.01	40.27	-38.77	47.51	68.30	20.79	Horizontal
5	17988.020	43.79	44.73	-37.01	51.50	74.00	22.50	Horizontal
6	17964.062	34.54	44.58	-37.08	42.04	54.00	11.96	Horizontal

11ac(VHT40)_TX_CH_134_Vertical

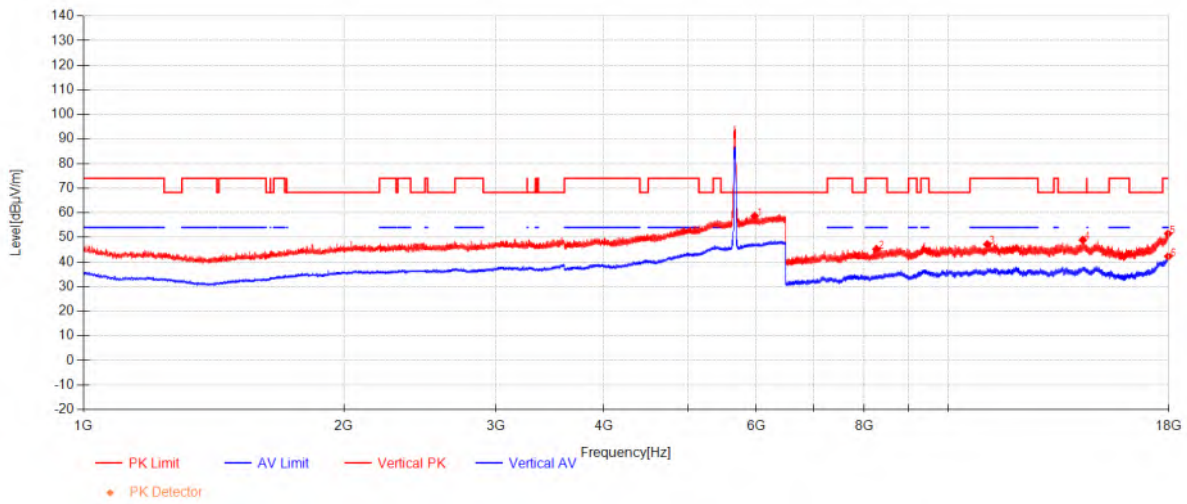


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5974.1154	41.85	32.79	-15.97	58.67	68.30	9.63	Vertical
2	8263.8125	53.03	36.59	-44.44	45.18	74.00	28.82	Vertical
3	11098.083	47.78	39.49	-40.12	47.15	74.00	26.85	Vertical
4	14312.333	47.43	40.27	-38.77	48.93	68.30	19.37	Vertical
5	17962.625	44.00	44.58	-37.08	51.49	74.00	22.51	Vertical
6	17969.812	34.72	44.62	-37.06	42.27	54.00	11.73	Vertical

11ac(VHT40)_TX_CH_151_Horizontal

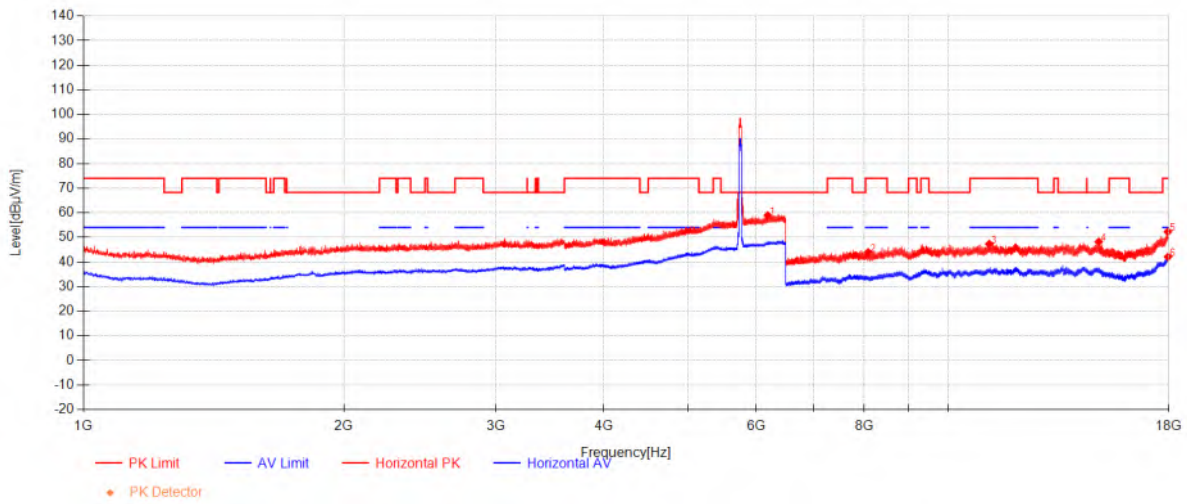


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6186.5	41.52	33.51	-16.13	58.90	68.30	9.40	Horizontal
2	8082.2083	51.93	36.39	-44.40	43.92	74.00	30.08	Horizontal
3	11158.937	47.81	39.48	-40.02	47.28	74.00	26.72	Horizontal
4	14930.937	46.20	40.21	-38.24	48.16	68.30	20.14	Horizontal
5	17947.291	44.92	44.48	-37.13	52.28	74.00	21.72	Horizontal
6	17956.395	34.64	44.54	-37.10	42.08	54.00	11.92	Horizontal

11ac(VHT40)_TX_CH_151_Vertical

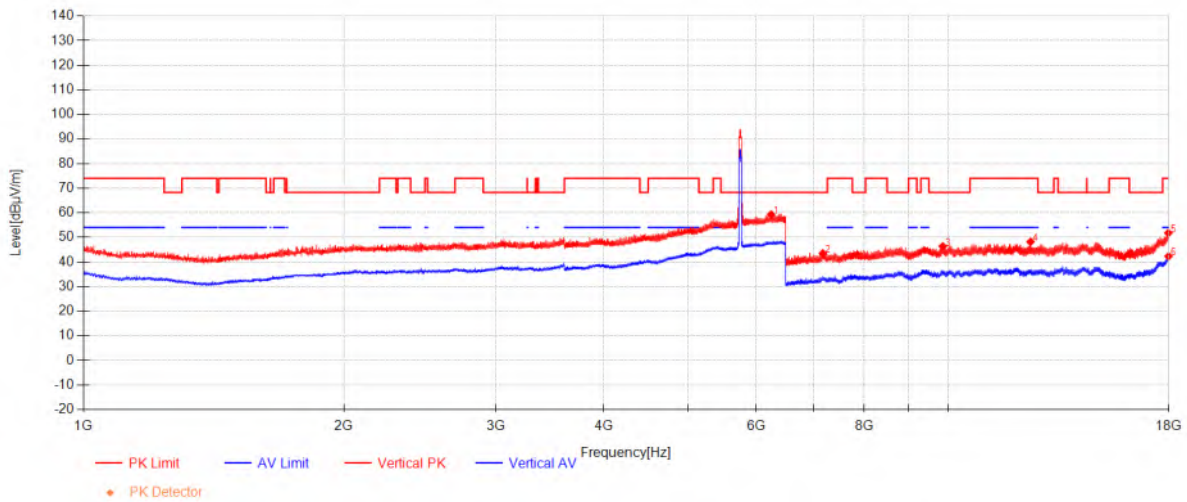


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6242.3462	41.73	33.72	-16.14	59.31	68.30	8.99	Vertical
2	7162.6875	53.39	35.79	-45.70	43.49	68.30	24.81	Vertical
3	9857.5208	49.65	38.60	-41.91	46.34	68.30	21.96	Vertical
4	12453.166	47.65	39.13	-38.58	48.20	74.00	25.80	Vertical
5	17970.770	44.20	44.62	-37.06	51.76	74.00	22.24	Vertical
6	17979.875	34.65	44.68	-37.04	42.29	54.00	11.71	Vertical

11ac(VHT40)_TX_CH_159_Horizontal

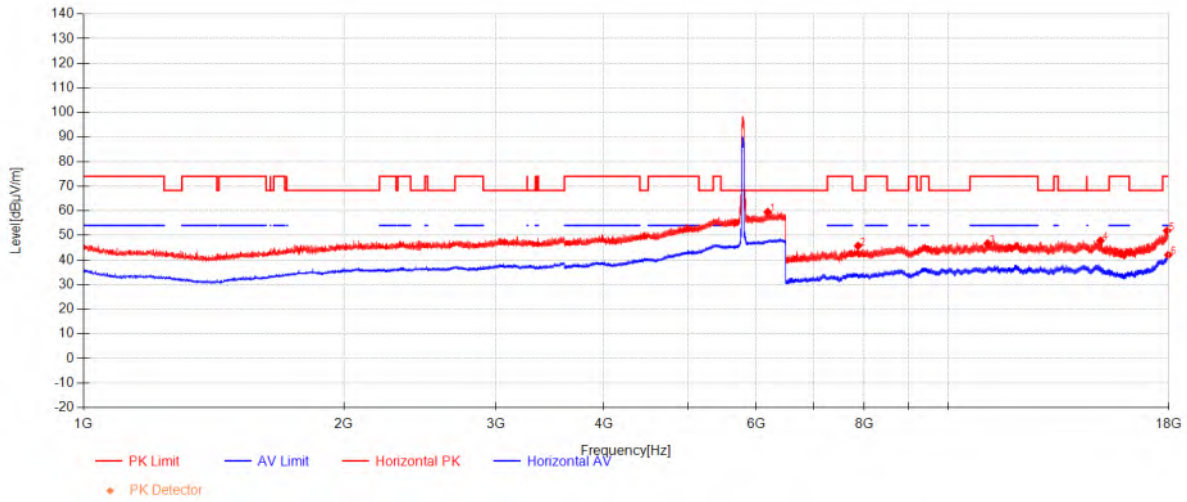


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6186.5	42.07	33.51	-16.13	59.45	68.30	8.85	Horizontal
2	7867.0625	54.31	36.33	-44.95	45.69	68.30	22.61	Horizontal
3	11110.541	47.32	39.49	-40.09	46.72	74.00	27.28	Horizontal
4	15002.812	45.53	40.19	-37.90	47.82	68.30	20.48	Horizontal
5	17905.125	44.86	44.23	-37.25	51.85	74.00	22.15	Horizontal
6	17968.854	34.46	44.61	-37.07	42.01	54.00	11.99	Horizontal

11ac(VHT40)_TX_CH_159_Vertical

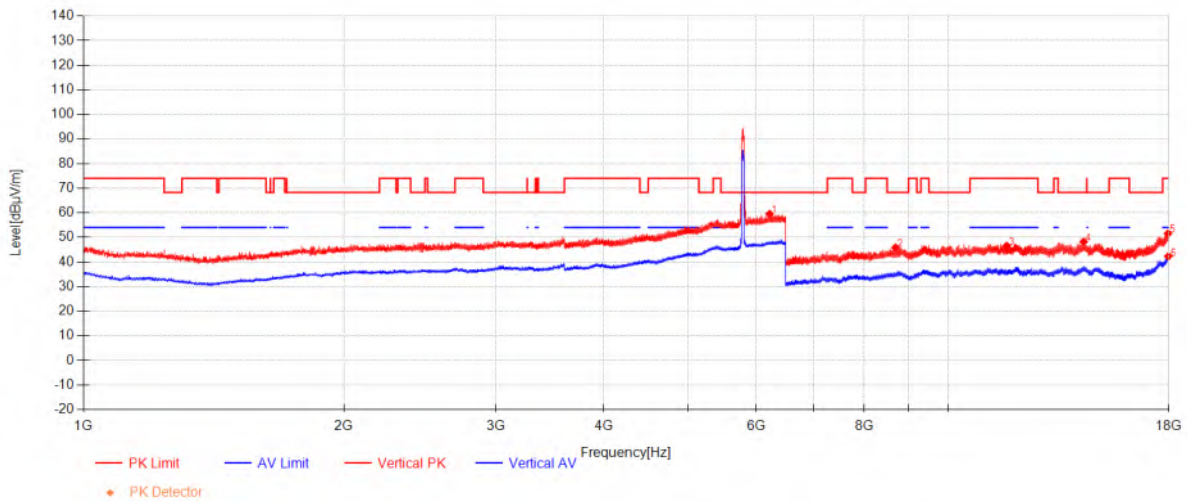

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6217.3846	42.00	33.63	-16.10	59.53	68.30	8.77	Vertical
2	8690.2708	52.49	37.06	-43.73	45.82	68.30	22.48	Vertical
3	11684.104	46.87	39.43	-39.78	46.53	74.00	27.47	Vertical
4	14344.437	46.68	40.27	-38.75	48.20	68.30	20.10	Vertical
5	17953.041	44.12	44.52	-37.11	51.53	74.00	22.47	Vertical
6	17969.812	34.72	44.62	-37.06	42.27	54.00	11.73	Vertical


11ac(VHT80)_TX_CH_42_Horizontal

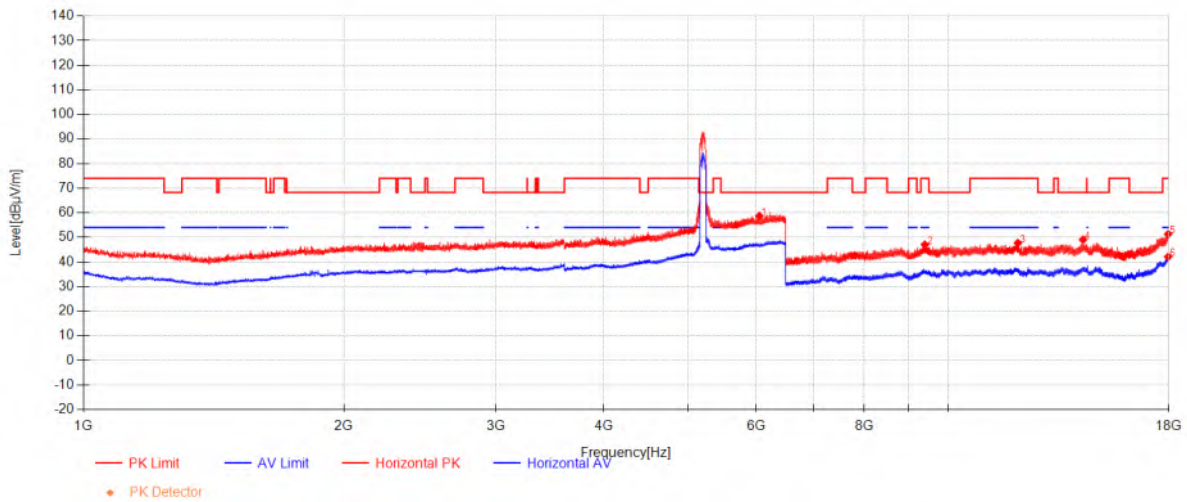

Data List


NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6049.4231	41.91	32.99	-16.21	58.69	68.30	9.61	Horizontal
2	9399.9167	51.90	37.96	-42.81	47.05	74.00	26.95	Horizontal
3	12039.645	47.23	39.38	-38.89	47.71	74.00	26.29	Horizontal
4	14319.520	47.54	40.27	-38.77	49.04	68.30	19.26	Horizontal
5	17963.104	43.84	44.58	-37.08	51.34	74.00	22.66	Horizontal
6	17959.75	34.60	44.56	-37.09	42.07	54.00	11.93	Horizontal

11ac(VHT80)_TX_CH_42_Vertical

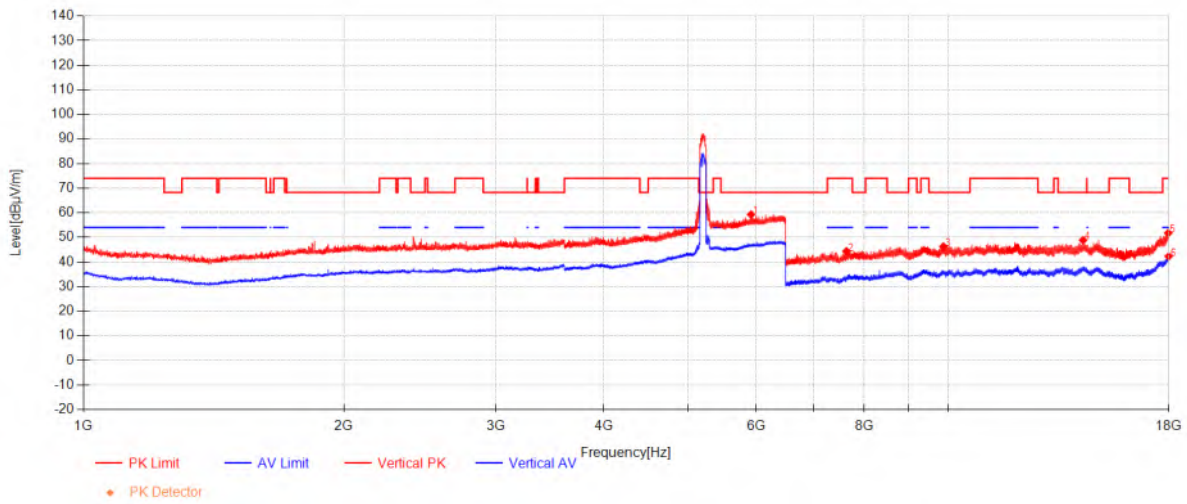


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5917.8462	42.51	32.77	-16.00	59.28	68.30	9.02	Vertical
2	7627.9583	52.91	36.37	-44.95	44.33	74.00	29.67	Vertical
3	9875.7292	49.50	38.63	-41.87	46.26	68.30	22.04	Vertical
4	14320.958	47.34	40.27	-38.77	48.84	68.30	19.46	Vertical
5	17965.020	44.21	44.59	-37.08	51.72	74.00	22.28	Vertical
6	17984.187	34.57	44.71	-37.02	42.25	54.00	11.75	Vertical

11ac(VHT80)_TX_CH_58_Horizontal

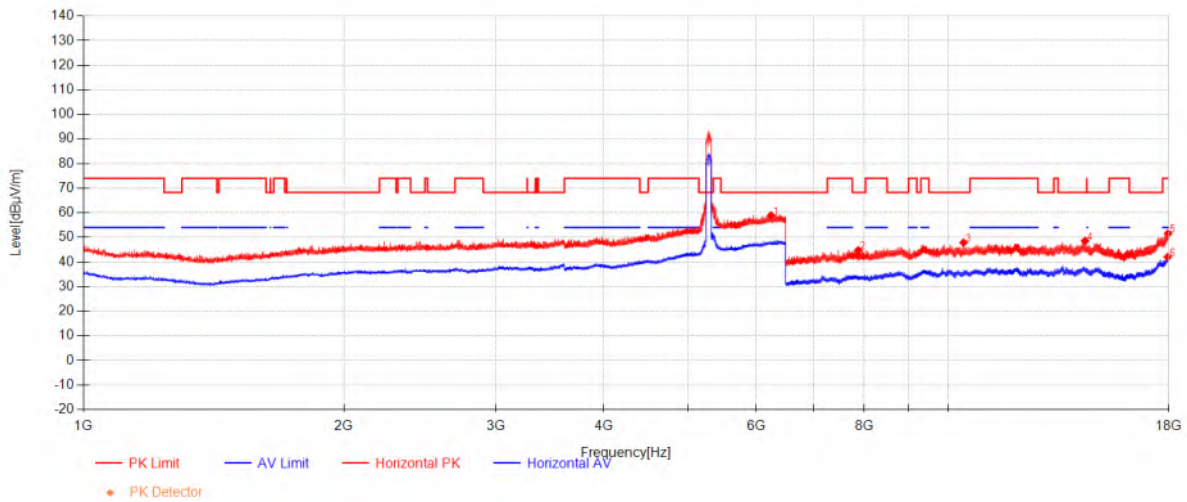


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6239.8077	41.32	33.71	-16.13	58.90	68.30	9.40	Horizontal
2	7868.5	53.35	36.33	-44.95	44.73	68.30	23.57	Horizontal
3	10417.666	49.89	39.09	-41.13	47.85	68.30	20.45	Horizontal
4	14400.979	47.04	40.26	-38.71	48.59	68.30	19.71	Horizontal
5	17956.395	44.09	44.54	-37.10	51.53	74.00	22.47	Horizontal
6	17940.583	34.69	44.44	-37.15	41.99	54.00	12.01	Horizontal

11ac(VHT80)_TX_CH_58_Vertical

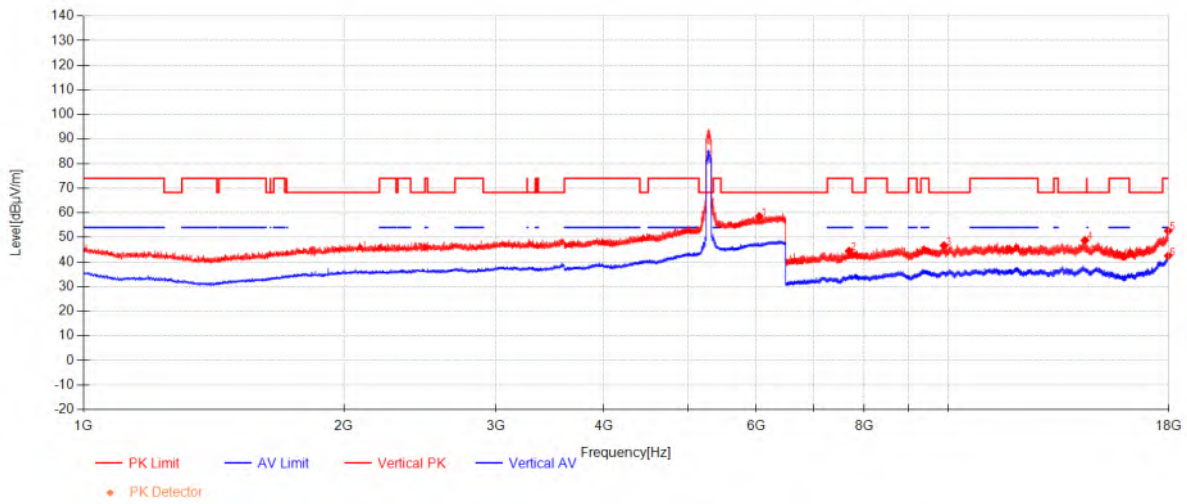


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6047.7308	41.77	32.98	-16.20	58.55	68.30	9.75	Vertical
2	7681.625	53.22	36.36	-45.09	44.49	74.00	29.51	Vertical
3	9889.625	49.85	38.65	-41.83	46.66	68.30	21.64	Vertical
4	14397.145	47.28	40.26	-38.71	48.83	68.30	19.47	Vertical
5	17965.020	45.13	44.59	-37.08	52.64	74.00	21.36	Vertical
6	17965.5	34.94	44.59	-37.08	42.46	54.00	11.54	Vertical

11ac(VHT80)_TX_CH_106_Horizontal

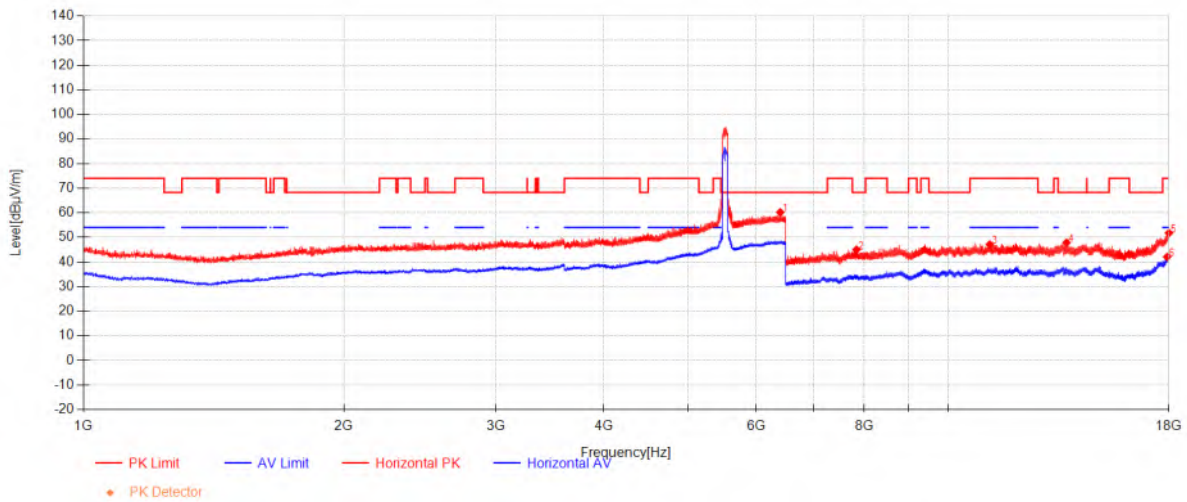

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6395.9231	42.06	34.30	-16.15	60.21	68.30	8.09	Horizontal
2	7834.9583	53.59	36.33	-44.92	45.00	68.30	23.30	Horizontal
3	11171.875	47.60	39.48	-40.00	47.09	74.00	26.91	Horizontal
4	13706.187	45.97	39.86	-37.99	47.84	68.30	20.46	Horizontal
5	17999.041	43.95	44.79	-36.98	51.76	74.00	22.24	Horizontal
6	17912.791	34.98	44.28	-37.22	42.03	54.00	11.97	Horizontal


11ac(VHT80)_TX_CH_106_Vertical

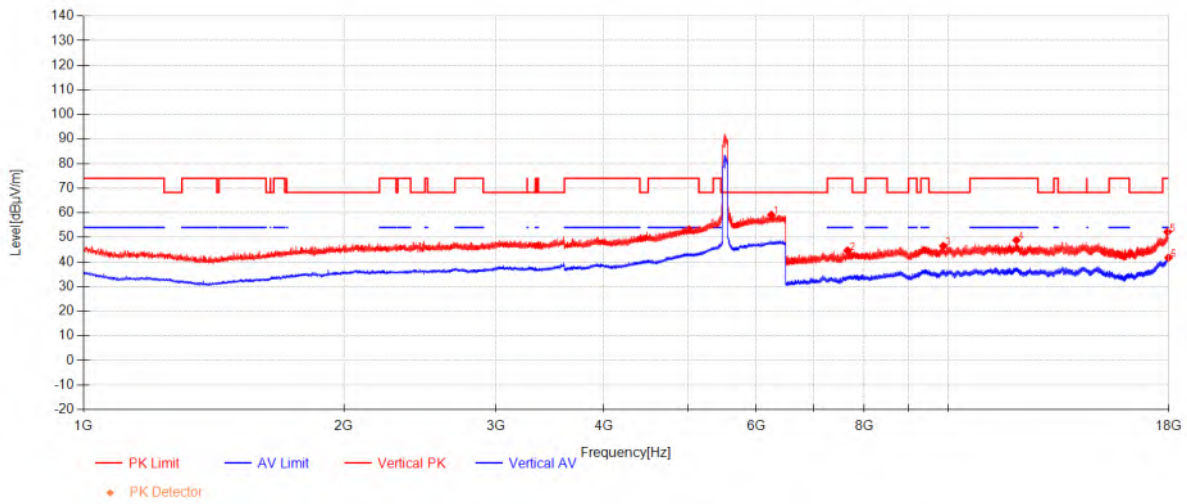

Data List


NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6244.8846	41.53	33.73	-16.14	59.12	68.30	9.18	Vertical
2	7649.5208	53.25	36.37	-45.01	44.61	74.00	29.39	Vertical
3	9871.8958	49.72	38.62	-41.87	46.47	68.30	21.83	Vertical
4	11991.729	48.10	39.40	-38.67	48.83	74.00	25.17	Vertical
5	17937.229	44.93	44.42	-37.16	52.20	74.00	21.80	Vertical
6	17980.354	34.09	44.68	-37.04	41.74	54.00	12.26	Vertical

11ac(VHT80)_TX_CH_122_Horizontal

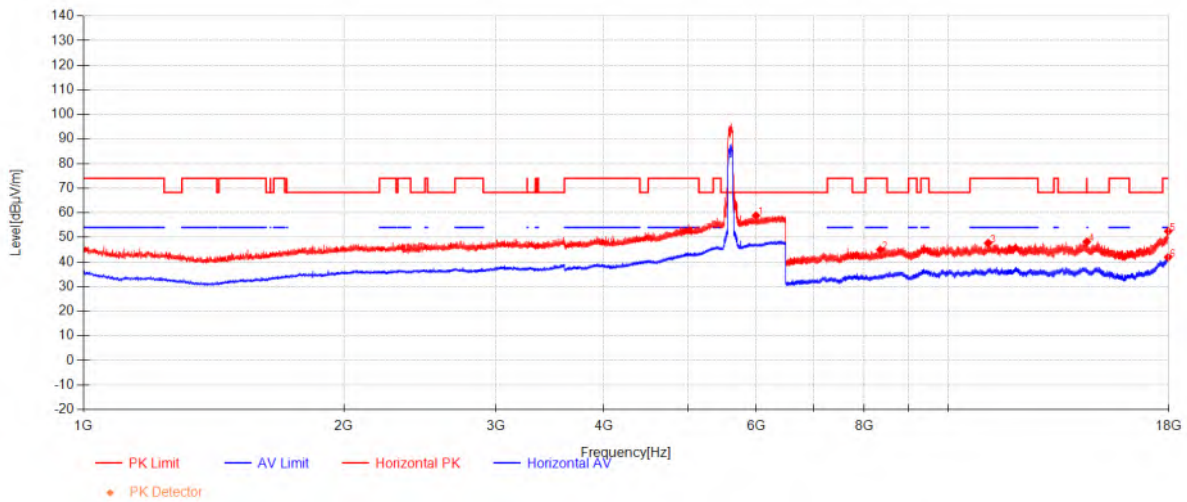

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5994.4231	41.98	32.80	-15.95	58.82	68.30	9.48	Horizontal
2	8347.6667	52.70	36.68	-44.46	44.92	74.00	29.08	Horizontal
3	11125.395	48.28	39.49	-40.07	47.70	74.00	26.30	Horizontal
4	14467.583	46.42	40.25	-38.46	48.21	68.30	20.09	Horizontal
5	17965.5	44.95	44.59	-37.08	52.47	74.00	21.53	Horizontal
6	17959.75	34.42	44.56	-37.09	41.89	54.00	12.11	Horizontal


11ac(VHT80)_TX_CH_122_Vertical

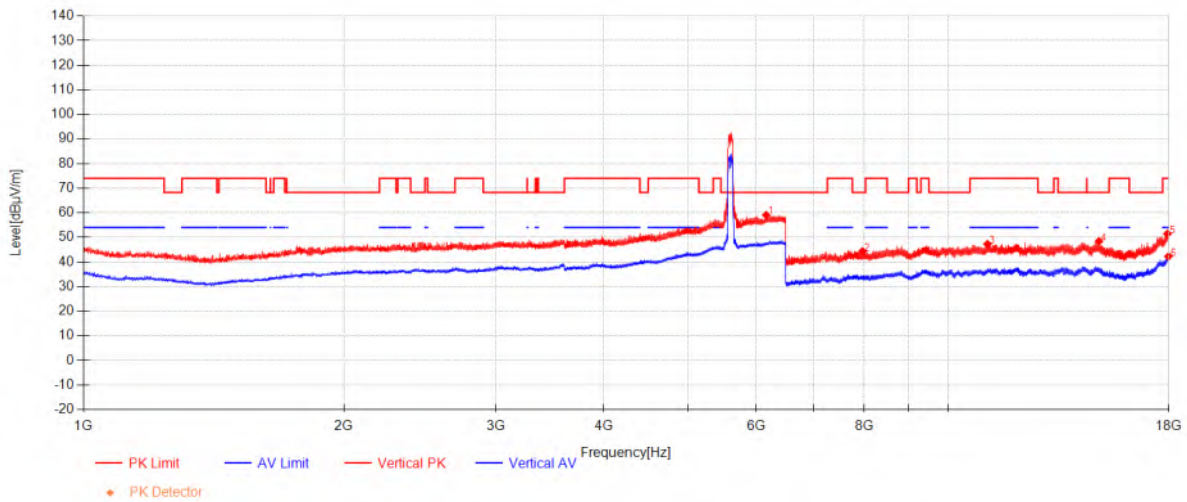

Data List


NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6160.2692	41.88	33.41	-16.23	59.06	68.30	9.24	Vertical
2	7961.4583	52.54	36.31	-44.54	44.31	68.30	23.99	Vertical
3	11101.437	47.88	39.49	-40.11	47.26	74.00	26.74	Vertical
4	14938.125	46.37	40.21	-38.21	48.37	68.30	19.93	Vertical
5	17927.166	44.25	44.36	-37.18	51.43	74.00	22.57	Vertical
6	17972.687	34.66	44.64	-37.06	42.24	54.00	11.76	Vertical

11ac(VHT80)_TX_CH_155_Horizontal

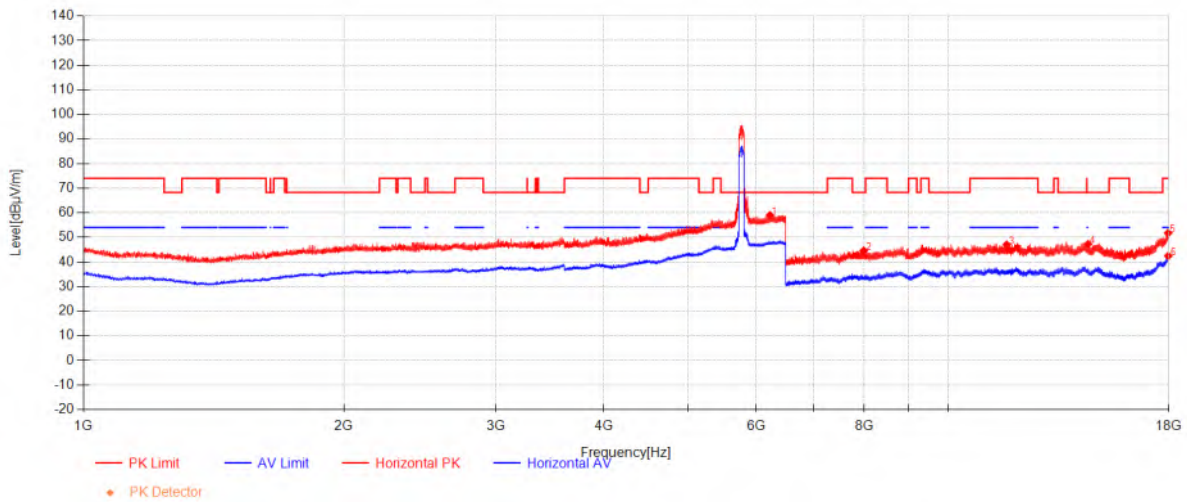


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6221.6154	41.48	33.64	-16.10	59.02	68.30	9.28	Horizontal
2	7985.8958	52.62	36.30	-44.37	44.55	68.30	23.75	Horizontal
3	11684.104	47.35	39.43	-39.78	47.01	74.00	26.99	Horizontal
4	14513.104	45.28	40.25	-38.31	47.22	68.30	21.08	Horizontal
5	17959.270	44.27	44.56	-37.09	51.73	74.00	22.27	Horizontal
6	17968.375	34.91	44.61	-37.07	42.45	54.00	11.55	Horizontal

11ac(VHT80)_TX_CH_155_Vertical

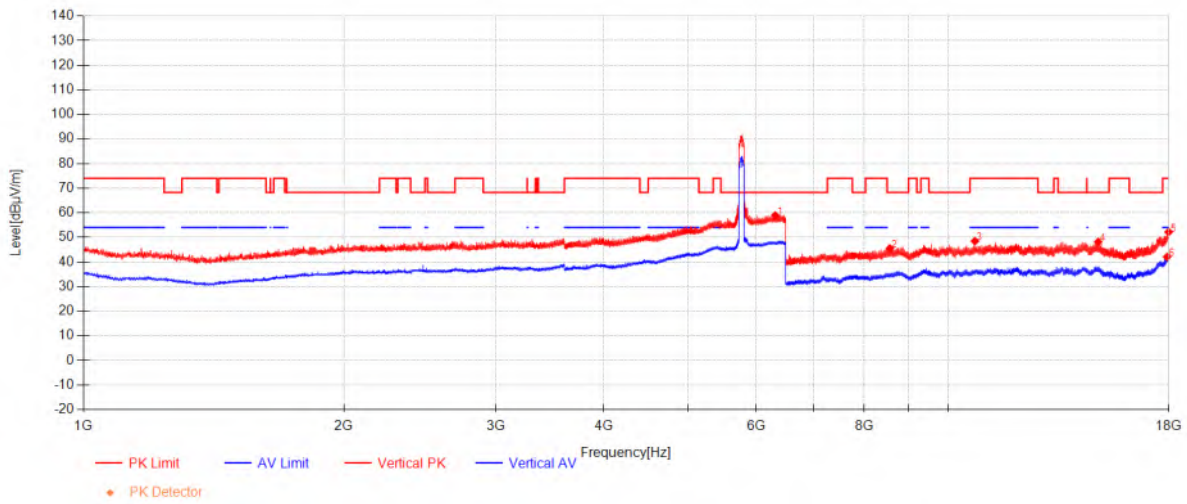


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6310.4615	41.17	33.98	-16.22	58.93	68.30	9.37	Vertical
2	8562.8125	52.57	36.92	-43.96	45.53	68.30	22.77	Vertical
3	10735.354	49.82	39.31	-40.68	48.45	74.00	25.55	Vertical
4	14909.375	46.32	40.21	-38.35	48.18	68.30	20.12	Vertical
5	17986.583	44.46	44.72	-37.02	52.16	74.00	21.84	Vertical
6	17909.437	35.01	44.26	-37.23	42.03	54.00	11.97	Vertical

11ax(HE20)_TX_CH_36_Horizontal

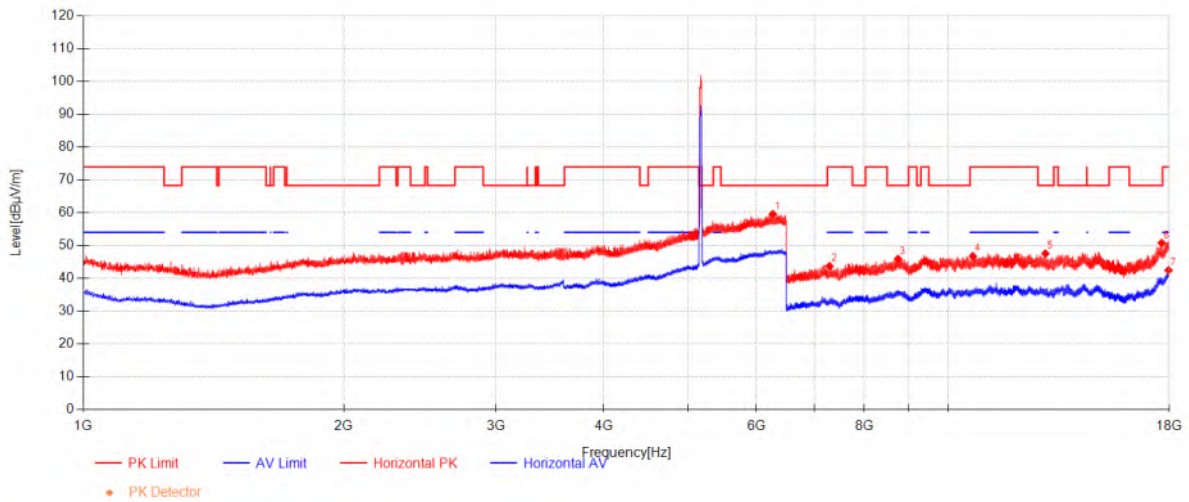

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6269	41.93	33.82	-16.18	59.57	68.30	8.73	Horizontal
2	7291.5833	53.66	36.02	-45.96	43.72	74.00	30.28	Horizontal
3	8752.0833	52.55	37.13	-43.78	45.90	68.30	22.40	Horizontal
4	10678.812	48.39	39.28	-40.89	46.77	74.00	27.23	Horizontal
5	12956.291	47.37	38.83	-38.66	47.53	68.30	20.77	Horizontal
6	17656.437	45.39	42.74	-37.35	50.78	68.30	17.52	Horizontal
7	17981.791	34.81	44.69	-37.03	42.47	54.00	11.53	Horizontal


11ax(HE20)_TX_CH_36_Vertical

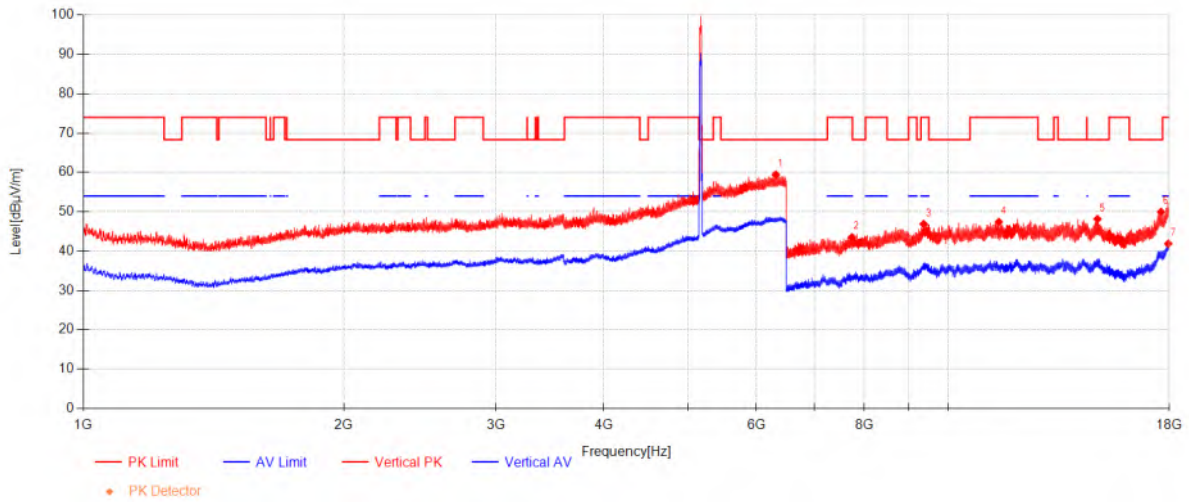

Data List


NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6320.1923	41.64	34.02	-16.21	59.44	68.30	8.86	Vertical
2	7736.7292	52.19	36.35	-45.05	43.49	74.00	30.51	Vertical
3	9367.8125	51.81	37.91	-42.85	46.87	74.00	27.13	Vertical
4	11443.562	47.83	39.46	-39.88	47.41	74.00	26.59	Vertical
5	14881.104	46.18	40.21	-38.24	48.15	68.30	20.15	Vertical
6	17626.25	44.42	42.56	-37.02	49.96	68.30	18.34	Vertical
7	17968.854	34.33	44.61	-37.07	41.88	54.00	12.12	Vertical

11ax(HE20)_TX_CH_40_Horizontal

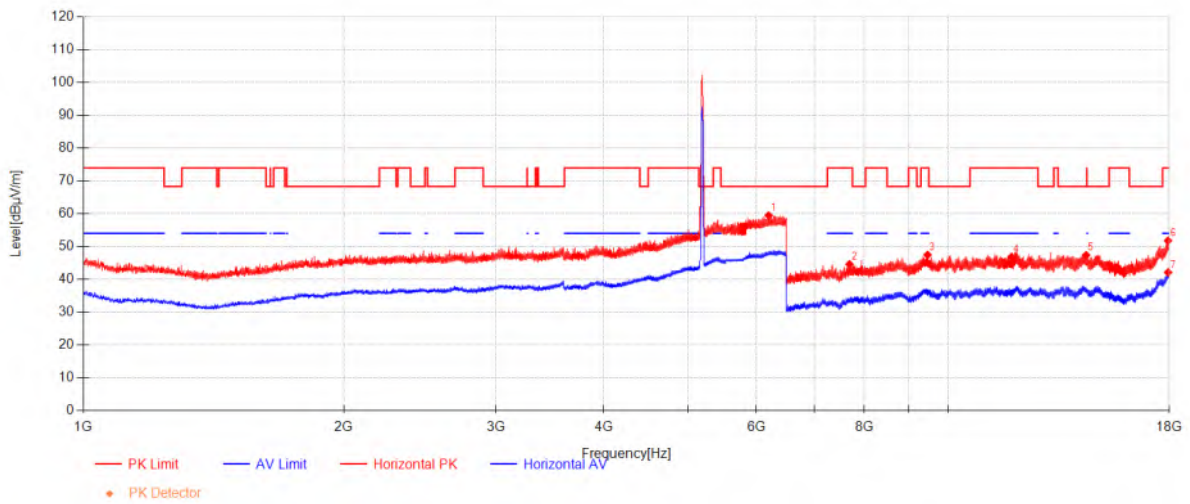


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6200.8846	42.00	33.56	-16.07	59.49	68.30	8.81	Horizontal
2	7690.25	53.36	36.36	-45.11	44.61	74.00	29.39	Horizontal
3	9467	52.09	38.05	-42.70	47.44	74.00	26.56	Horizontal
4	11840.312	46.94	39.42	-39.51	46.85	74.00	27.15	Horizontal
5	14440.270	45.67	40.26	-38.56	47.36	68.30	20.94	Horizontal
6	17956.875	44.36	44.54	-37.10	51.80	74.00	22.20	Horizontal
7	17962.625	34.62	44.58	-37.08	42.11	54.00	11.89	Horizontal

11ax(HE20)_TX_CH_40_Vertical

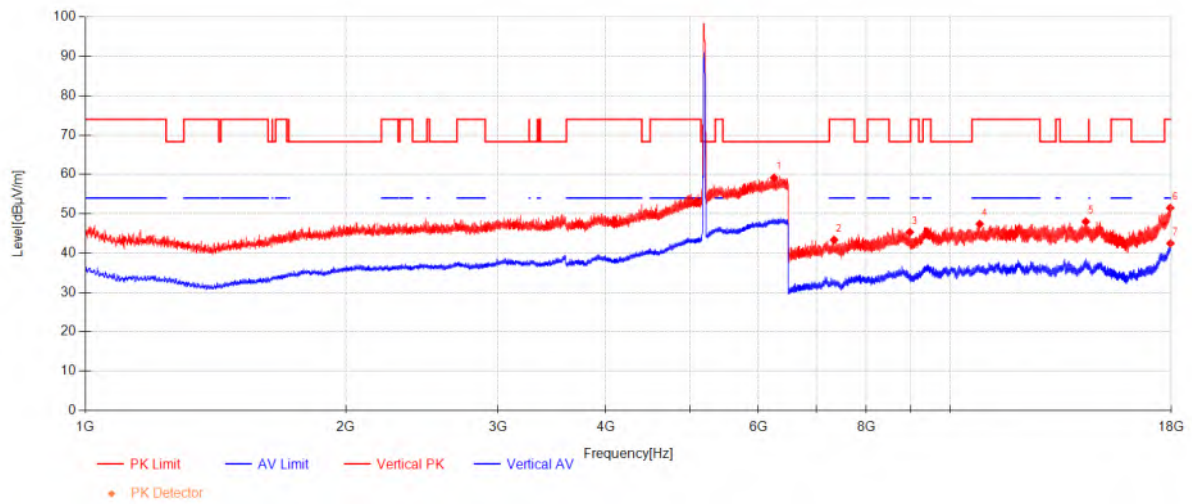


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6256.3077	41.54	33.77	-16.16	59.15	68.30	9.15	Vertical
2	7341.8958	53.06	36.12	-45.82	43.35	74.00	30.65	Vertical
3	8981.6042	51.56	37.38	-43.62	45.32	68.30	22.98	Vertical
4	10819.687	48.40	39.37	-40.39	47.38	74.00	26.62	Vertical
5	14348.75	46.46	40.27	-38.75	47.98	68.30	20.32	Vertical
6	17968.854	43.93	44.61	-37.07	51.48	74.00	22.52	Vertical
7	17978.437	34.84	44.67	-37.04	42.47	54.00	11.53	Vertical

11ax(HE20)_TX_CH_48_Horizontal

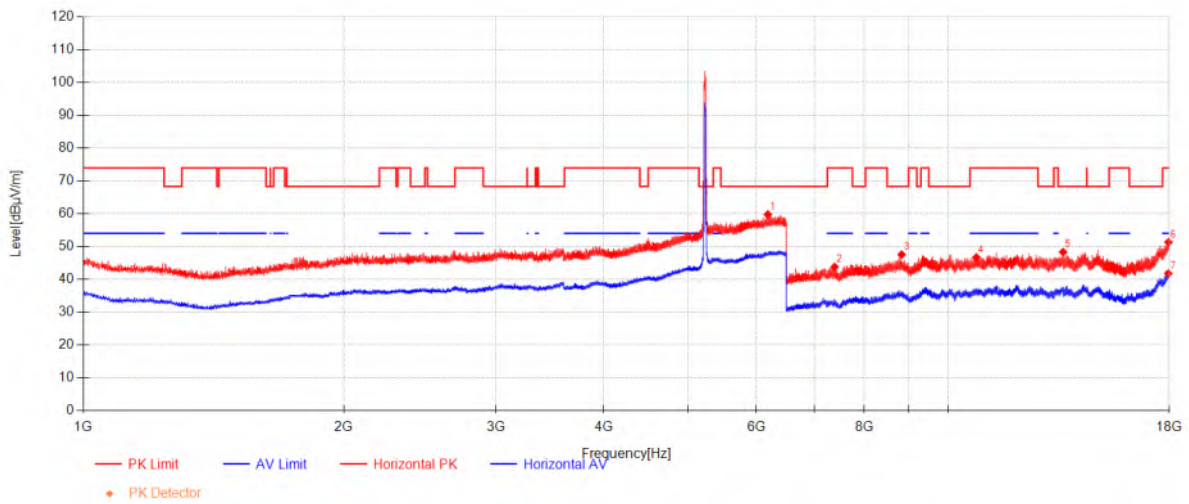


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6186.9231	42.39	33.51	-16.12	59.78	68.30	8.52	Horizontal
2	7391.7292	53.19	36.21	-45.60	43.80	74.00	30.20	Horizontal
3	8834.5	54.08	37.22	-43.75	47.54	68.30	20.76	Horizontal
4	10778.479	47.86	39.34	-40.53	46.68	74.00	27.32	Horizontal
5	13579.687	47.05	39.67	-38.42	48.30	68.30	20.00	Horizontal
6	17977	43.70	44.66	-37.04	51.32	74.00	22.68	Horizontal
7	17969.333	34.25	44.62	-37.07	41.80	54.00	12.20	Horizontal

11ax(HE20)_TX_CH_48_Veritical

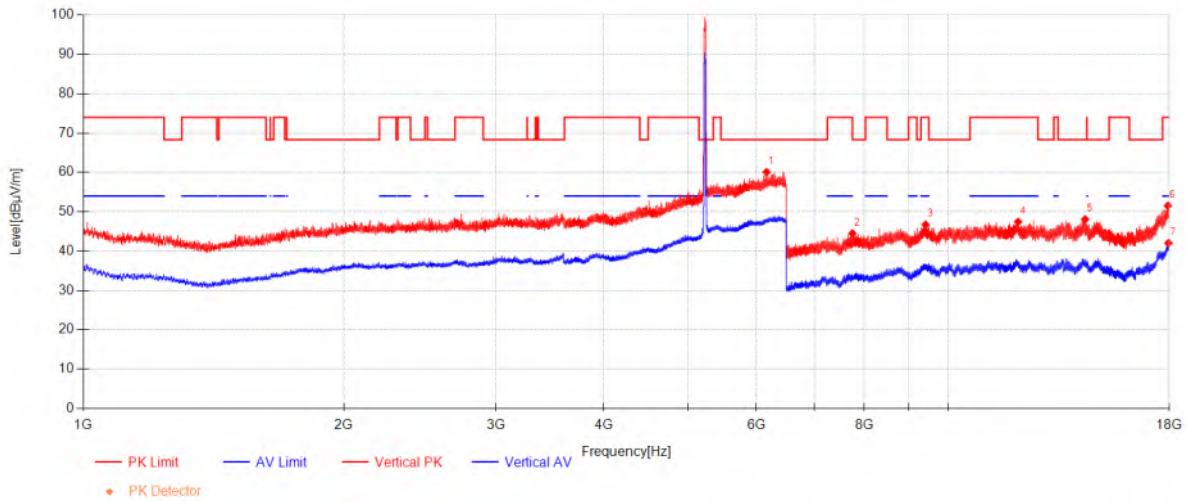


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6167.4615	42.86	33.44	-16.20	60.09	68.30	8.21	Vertical
2	7749.6667	53.18	36.35	-45.02	44.51	74.00	29.49	Vertical
3	9418.125	51.51	37.99	-42.78	46.71	74.00	27.29	Vertical
4	12046.833	47.01	39.37	-38.95	47.43	74.00	26.57	Vertical
5	14400.5	46.52	40.26	-38.71	48.07	68.30	20.23	Vertical
6	17949.208	44.16	44.50	-37.12	51.53	74.00	22.47	Vertical
7	17975.562	34.42	44.65	-37.05	42.02	54.00	11.98	Vertical

11ax(HE20)_TX_CH_52_Horizontal

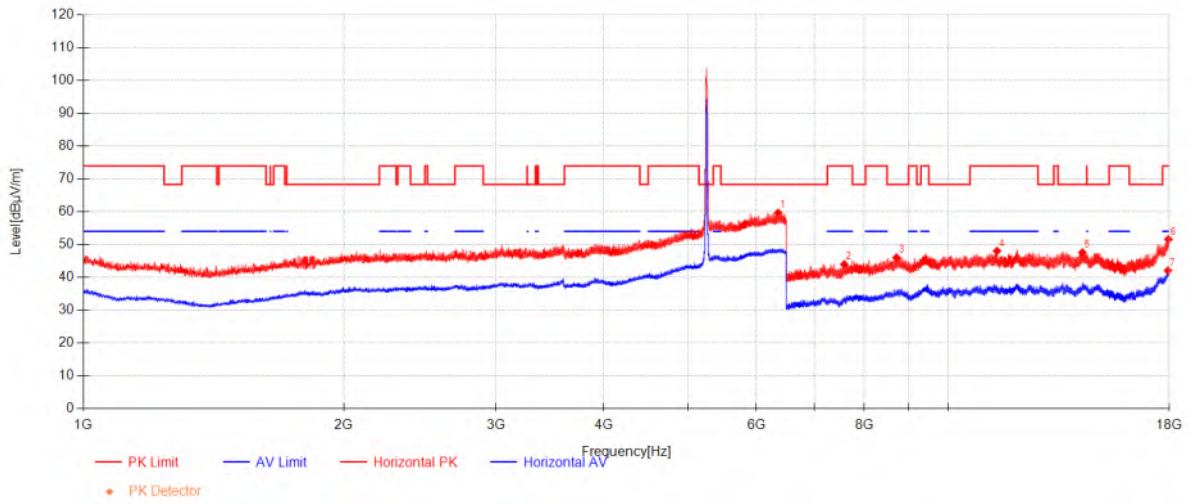


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6357.8462	41.70	34.16	-16.18	59.68	68.30	8.62	Horizontal
2	7582.4375	52.69	36.38	-45.10	43.98	74.00	30.02	Horizontal
3	8716.625	52.63	37.09	-43.72	46.00	68.30	22.30	Horizontal
4	11387.979	48.36	39.46	-39.80	48.02	74.00	25.98	Horizontal
5	14295.562	46.03	40.27	-38.75	47.55	68.30	20.75	Horizontal
6	17976.041	44.00	44.66	-37.05	51.61	74.00	22.39	Horizontal
7	17953.041	34.63	44.52	-37.11	42.04	54.00	11.96	Horizontal

11ax(HE20)_TX_CH_52_Vertical

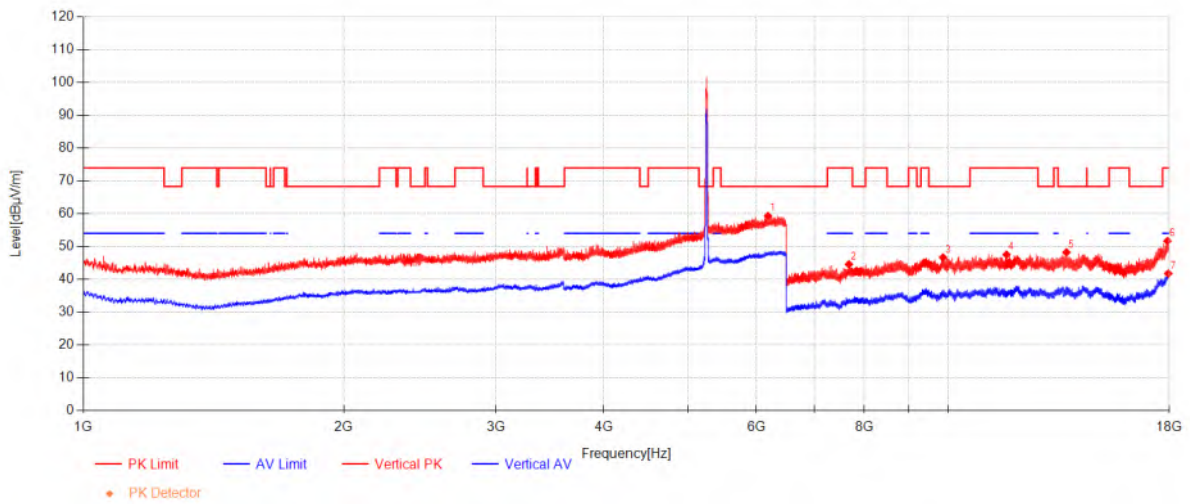


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6189.4615	41.91	33.52	-16.11	59.32	68.30	8.98	Vertical
2	7679.2292	53.30	36.36	-45.09	44.58	74.00	29.42	Vertical
3	9863.75	49.95	38.61	-41.89	46.67	68.30	21.63	Vertical
4	11682.187	47.86	39.43	-39.76	47.53	74.00	26.47	Vertical
5	13702.833	46.34	39.85	-37.97	48.23	68.30	20.07	Vertical
6	17929.562	44.47	44.38	-37.18	51.67	74.00	22.33	Vertical
7	17968.375	34.23	44.61	-37.07	41.77	54.00	12.23	Vertical

11ax(HE20)_TX_CH_60_Horizontal

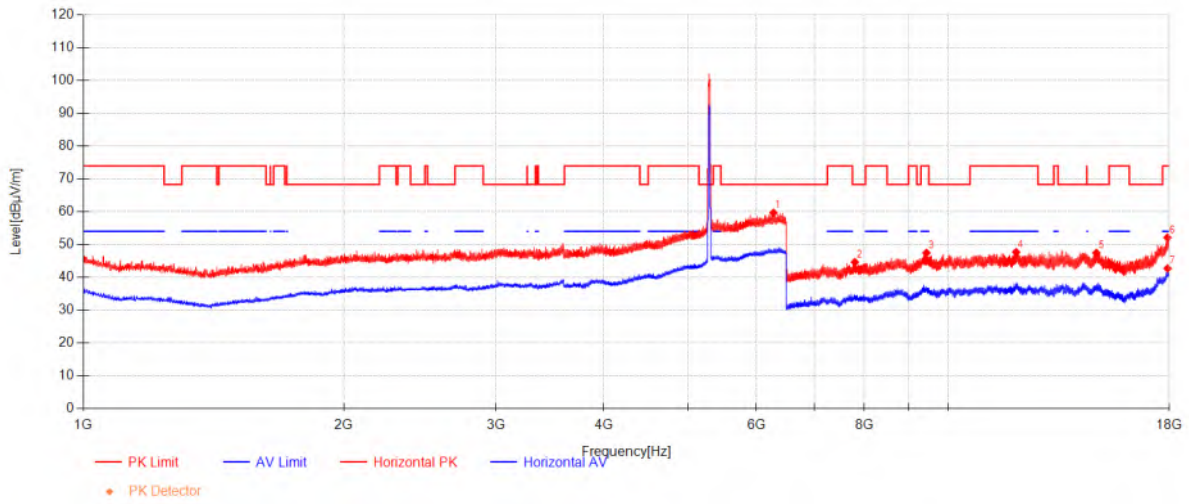


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6280.4231	42.00	33.87	-16.20	59.67	68.30	8.63	Horizontal
2	7799.9792	53.19	36.34	-44.90	44.63	68.30	23.67	Horizontal
3	9439.6875	52.18	38.02	-42.75	47.45	74.00	26.55	Horizontal
4	11984.062	47.07	39.40	-38.78	47.70	74.00	26.30	Horizontal
5	14837.020	45.09	40.22	-37.86	47.45	68.30	20.85	Horizontal
6	17931	44.90	44.39	-37.17	52.11	74.00	21.89	Horizontal
7	17935.312	35.44	44.41	-37.16	42.69	54.00	11.31	Horizontal

11ax(HE20)_TX_CH_60_Verical

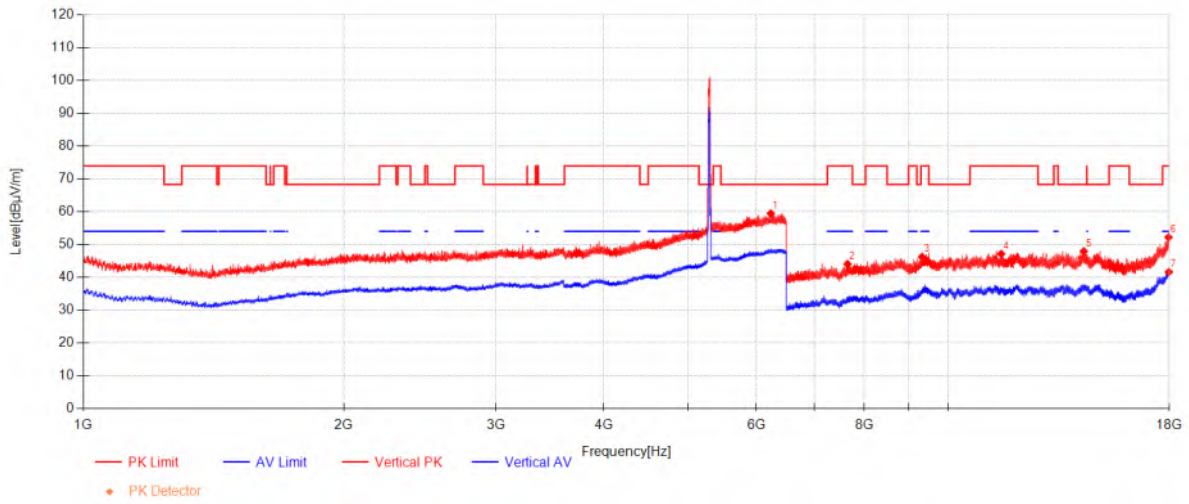


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6236	41.92	33.70	-16.13	59.49	68.30	8.81	Vertical
2	7649.5208	52.68	36.37	-45.01	44.04	74.00	29.96	Vertical
3	9328.5208	51.28	37.86	-42.90	46.24	74.00	27.76	Vertical
4	11515.916	47.63	39.45	-39.95	47.13	74.00	26.87	Vertical
5	14352.104	46.41	40.26	-38.74	47.93	68.30	20.37	Vertical
6	17983.229	44.53	44.70	-37.03	52.20	74.00	21.80	Vertical
7	17993.770	33.85	44.76	-37.00	41.62	54.00	12.38	Vertical

11ax(HE20)_TX_CH_64_Horizontal

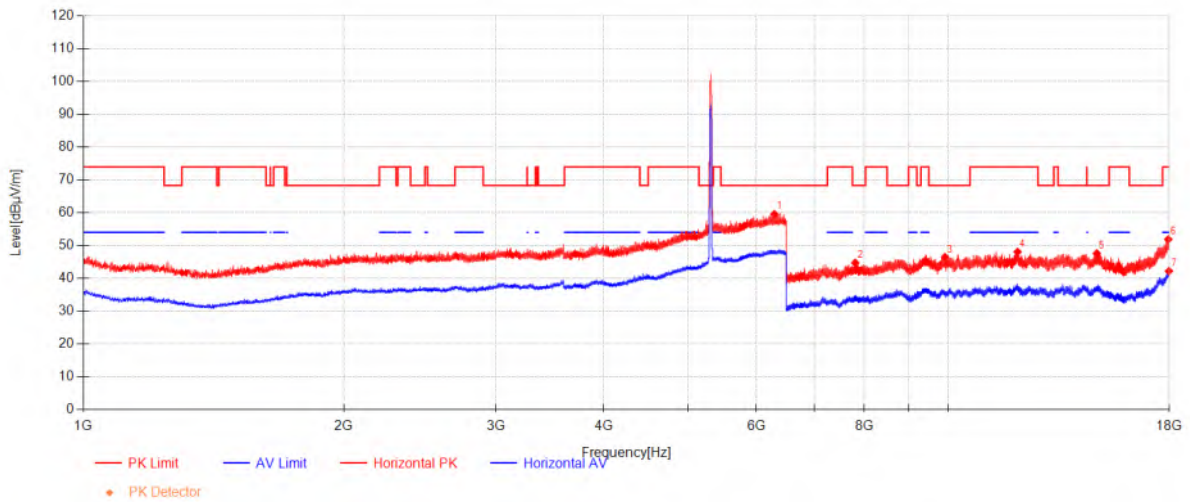


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6296.5	41.90	33.93	-16.22	59.60	68.30	8.70	Horizontal
2	7809.0833	53.30	36.34	-44.91	44.73	68.30	23.57	Horizontal
3	9916.4583	49.59	38.68	-41.80	46.47	68.30	21.83	Horizontal
4	12029.583	47.49	39.38	-38.81	48.06	74.00	25.94	Horizontal
5	14854.75	45.42	40.21	-38.01	47.62	68.30	20.68	Horizontal
6	17971.25	44.31	44.63	-37.06	51.88	74.00	22.12	Horizontal
7	17998.562	34.39	44.79	-36.98	42.20	54.00	11.80	Horizontal

11ax(HE20)_TX_CH_64_Vertical

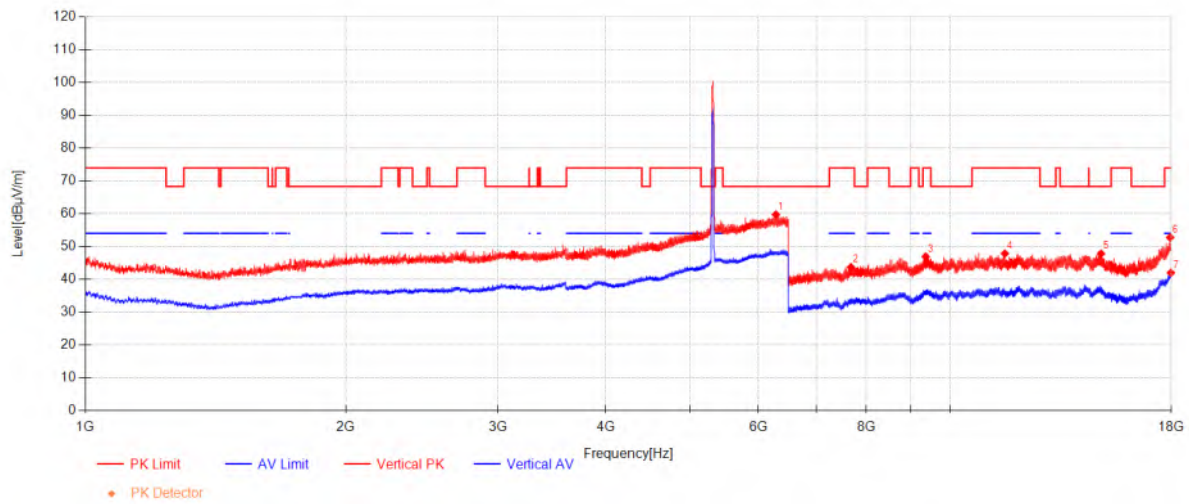


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6288.0385	42.06	33.89	-16.21	59.74	68.30	8.56	Vertical
2	7679.7083	52.42	36.36	-45.09	43.70	74.00	30.30	Vertical
3	9369.7292	51.86	37.92	-42.85	46.93	74.00	27.07	Vertical
4	11568.145	47.91	39.44	-39.50	47.86	74.00	26.14	Vertical
5	14941.479	45.80	40.21	-38.19	47.82	68.30	20.48	Vertical
6	17962.625	45.27	44.58	-37.08	52.76	74.00	21.24	Vertical
7	17999.520	34.17	44.80	-36.98	41.99	54.00	12.01	Vertical

11ax(HE20)_TX_CH_100_Horizontal

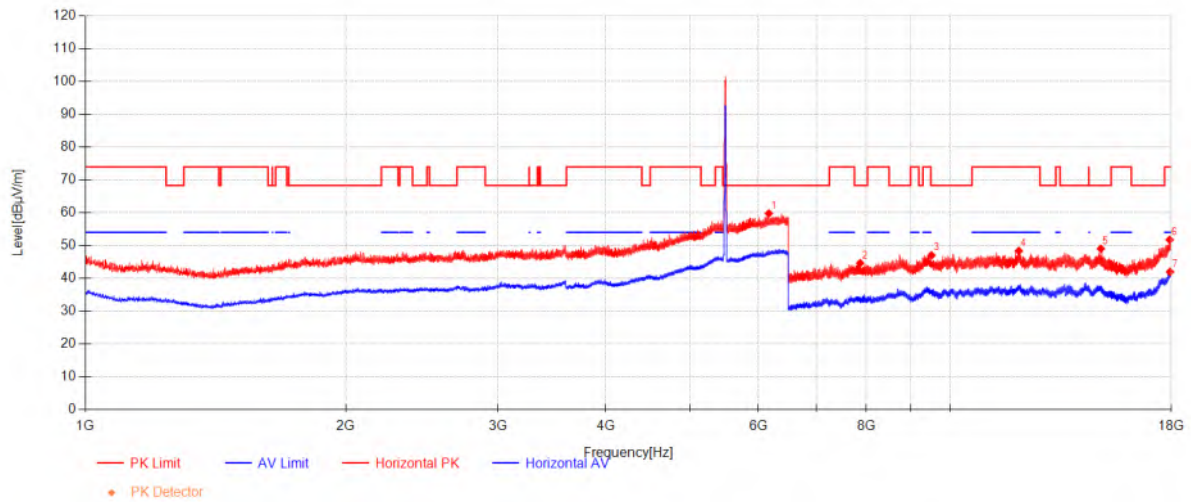


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6170.8462	42.52	33.45	-16.19	59.78	68.30	8.52	Horizontal
2	7868.0208	53.24	36.33	-44.95	44.62	68.30	23.68	Horizontal
3	9514.9167	51.42	38.12	-42.51	47.03	68.30	21.27	Horizontal
4	12005.625	47.57	39.40	-38.61	48.36	74.00	25.64	Horizontal
5	14936.208	47.06	40.21	-38.22	49.05	68.30	19.25	Horizontal
6	17940.583	44.46	44.44	-37.15	51.76	74.00	22.24	Horizontal
7	17956.395	34.53	44.54	-37.10	41.97	54.00	12.03	Horizontal

11ax(HE20)_TX_CH_100_Vertical

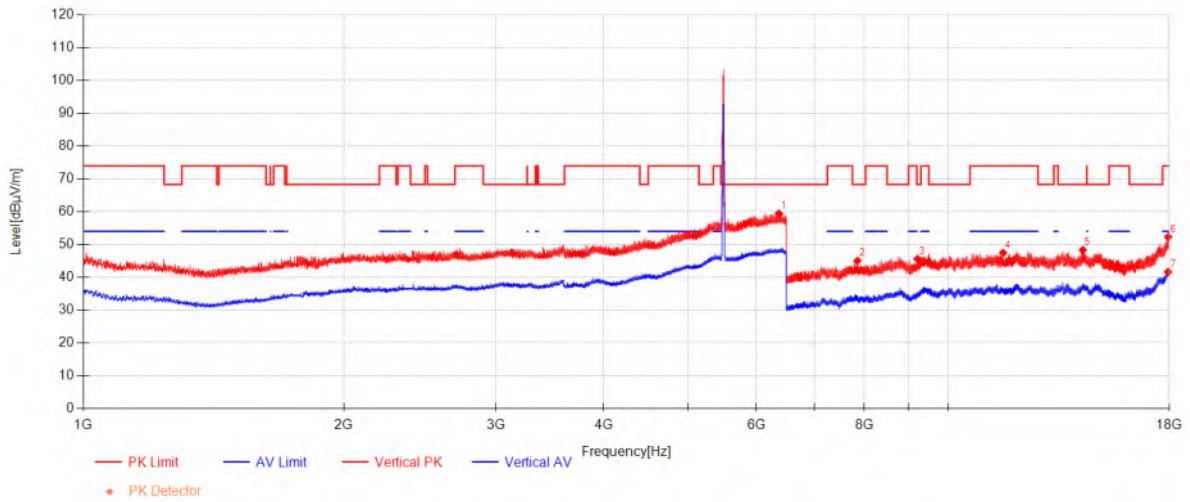


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6370.9615	41.37	34.21	-16.17	59.41	68.30	8.89	Vertical
2	7854.6042	53.65	36.33	-44.94	45.04	68.30	23.26	Vertical
3	9215.4375	50.86	37.70	-42.97	45.60	68.30	22.70	Vertical
4	11574.375	47.47	39.44	-39.44	47.47	74.00	26.53	Vertical
5	14311.854	46.83	40.27	-38.77	48.33	68.30	19.97	Vertical
6	17966.458	44.81	44.60	-37.07	52.33	74.00	21.67	Vertical
7	17955.437	34.21	44.53	-37.10	41.64	54.00	12.36	Vertical

11ax(HE20)_TX_CH_116_Horizontal

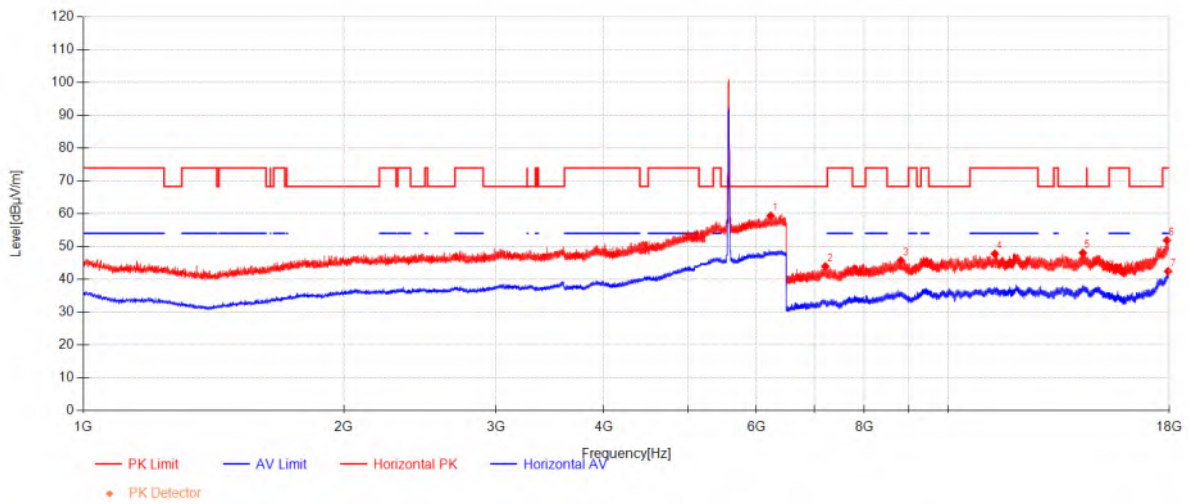


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6233.8846	41.82	33.69	-16.12	59.38	68.30	8.92	Horizontal
2	7211.0833	53.56	35.88	-45.51	43.93	68.30	24.37	Horizontal
3	8815.8125	52.35	37.20	-43.81	45.74	68.30	22.56	Horizontal
4	11323.291	48.63	39.47	-40.28	47.82	74.00	26.18	Horizontal
5	14312.333	46.55	40.27	-38.77	48.05	68.30	20.25	Horizontal
6	17907.041	44.88	44.24	-37.24	51.88	74.00	22.12	Horizontal
7	17958.791	34.99	44.55	-37.10	42.45	54.00	11.55	Horizontal

11ax(HE20)_TX_CH_116_Vertical

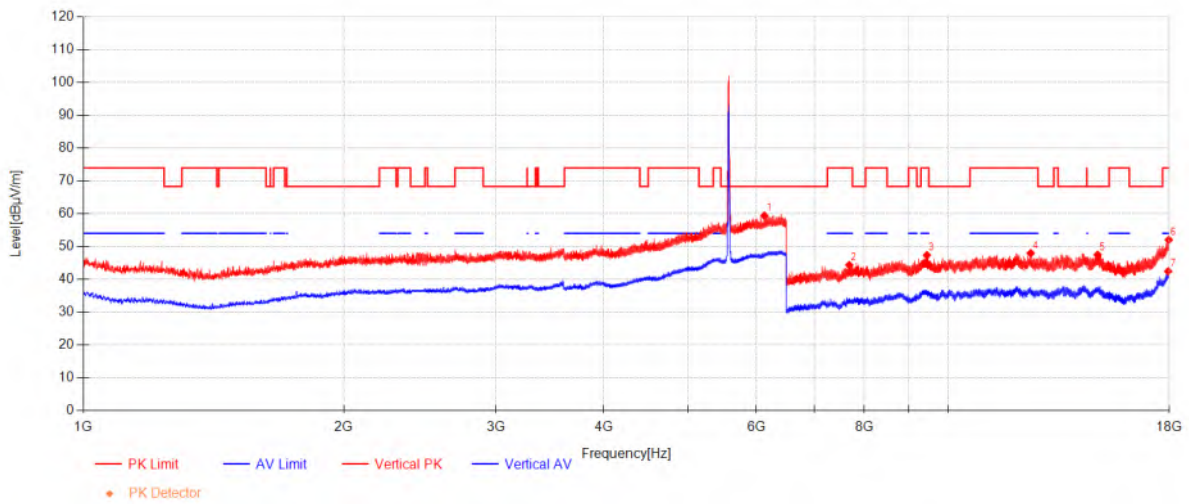


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6131.5	42.47	33.30	-16.35	59.42	68.30	8.88	Vertical
2	7685.9375	53.08	36.36	-45.10	44.34	74.00	29.66	Vertical
3	9449.2708	52.07	38.03	-42.73	47.37	74.00	26.63	Vertical
4	12456.520	47.44	39.13	-38.59	47.97	74.00	26.03	Vertical
5	14886.854	45.56	40.21	-38.29	47.48	68.30	20.82	Vertical
6	17995.208	44.26	44.77	-36.99	52.04	74.00	21.96	Vertical
7	17964.541	34.93	44.59	-37.08	42.44	54.00	11.56	Vertical

11ax(HE20)_TX_CH_140_Horizontal

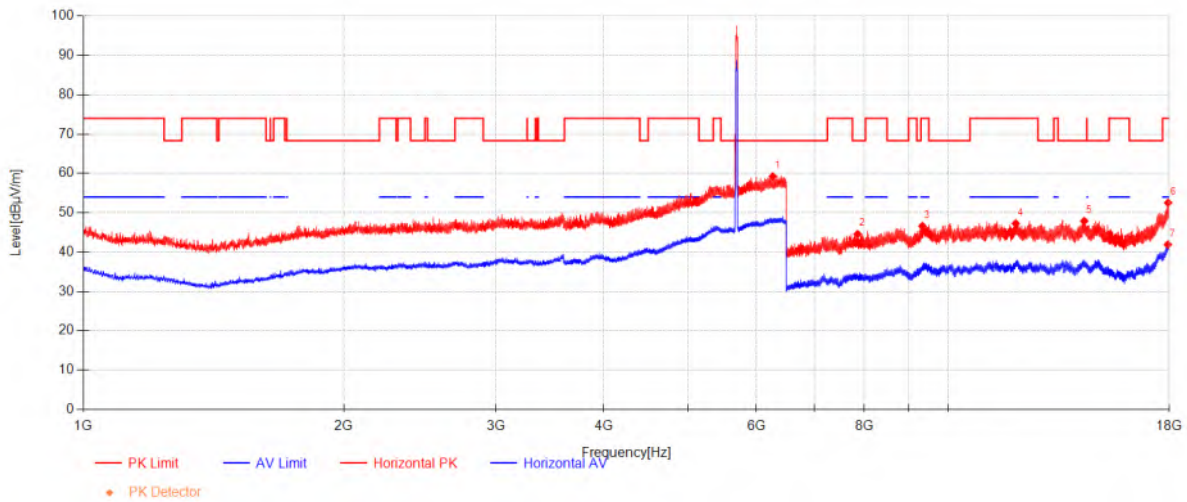


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6268.1538	41.58	33.82	-16.18	59.22	68.30	9.08	Horizontal
2	7856.0417	53.19	36.33	-44.94	44.58	68.30	23.72	Horizontal
3	9337.625	51.63	37.87	-42.89	46.61	74.00	27.39	Horizontal
4	11971.125	46.82	39.40	-38.95	47.27	74.00	26.73	Horizontal
5	14366	46.38	40.26	-38.73	47.91	68.30	20.39	Horizontal
6	17960.708	45.06	44.56	-37.09	52.53	74.00	21.47	Horizontal
7	17951.604	34.52	44.51	-37.12	41.91	54.00	12.09	Horizontal

11ax(HE20)_TX_CH_140_Vertical

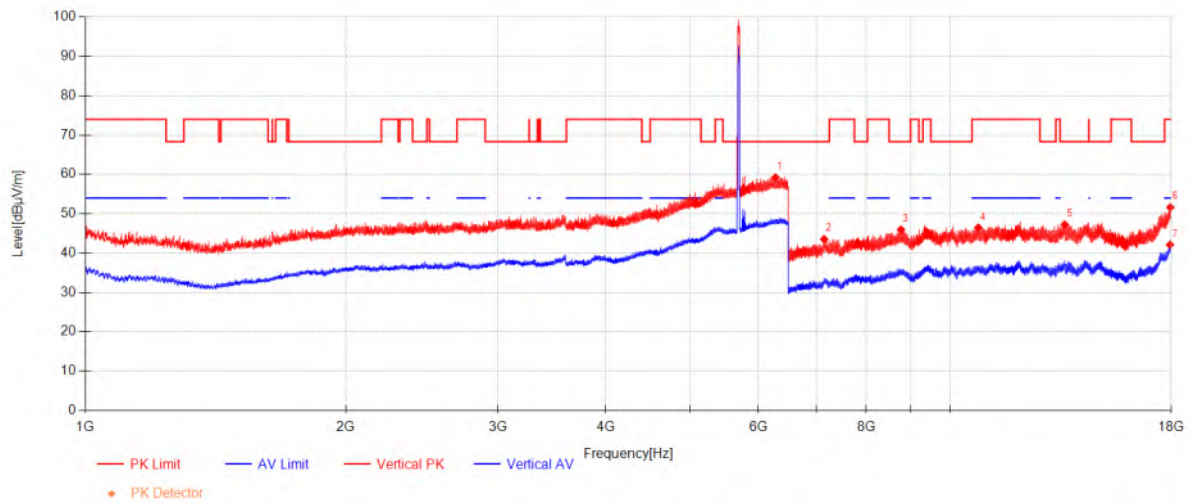


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6280.8462	41.54	33.87	-16.20	59.21	68.30	9.09	Vertical
2	7149.2708	53.57	35.77	-45.78	43.55	68.30	24.75	Vertical
3	8772.2083	52.63	37.15	-43.81	45.97	68.30	22.33	Vertical
4	10778.479	47.62	39.34	-40.53	46.44	74.00	27.56	Vertical
5	13565.791	46.10	39.65	-38.51	47.24	68.30	21.06	Vertical
6	17973.645	44.03	44.64	-37.05	51.62	74.00	22.38	Vertical
7	17957.354	34.67	44.54	-37.10	42.11	54.00	11.89	Vertical

11ax(HE20)_TX_CH_149_Horizontal

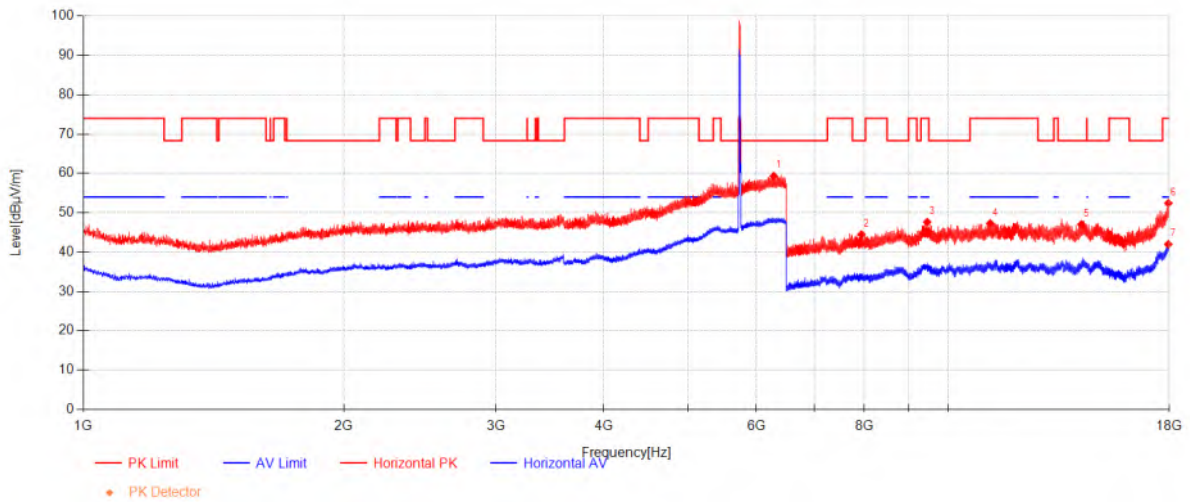


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6285.9231	41.64	33.89	-16.21	59.32	68.30	8.98	Horizontal
2	7937.0208	52.88	36.31	-44.71	44.48	68.30	23.82	Horizontal
3	9455.9792	52.33	38.04	-42.72	47.65	74.00	26.35	Horizontal
4	11186.25	47.77	39.48	-39.97	47.28	74.00	26.72	Horizontal
5	14260.104	45.31	40.27	-38.53	47.06	68.30	21.24	Horizontal
6	17975.562	44.83	44.65	-37.05	52.43	74.00	21.57	Horizontal
7	17969.333	34.43	44.62	-37.07	41.98	54.00	12.02	Horizontal

11ax(HE20)_TX_CH_149_Vertical

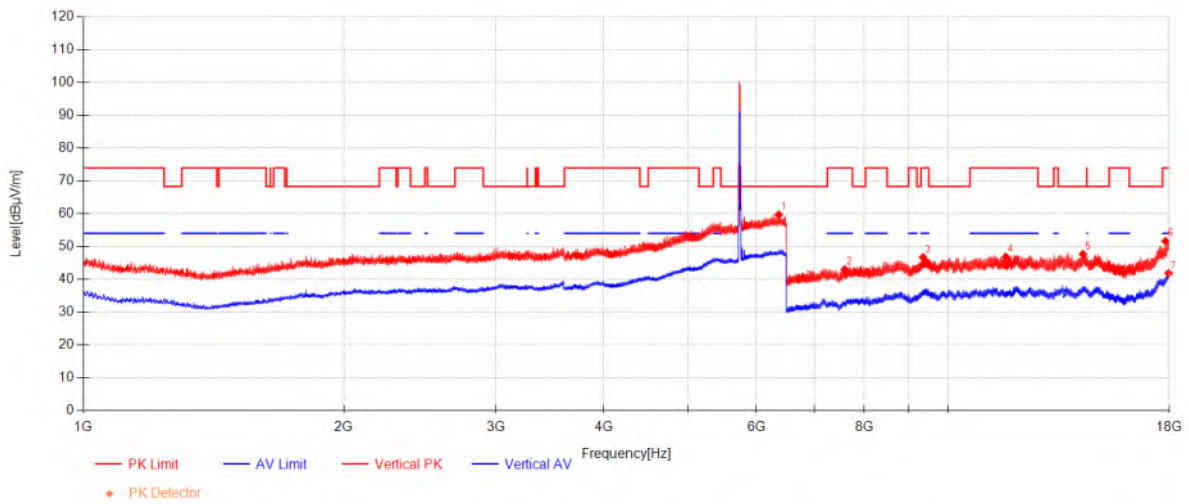


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6368.4231	41.71	34.20	-16.18	59.73	68.30	8.57	Vertical
2	7590.5833	51.62	36.38	-45.00	43.01	74.00	30.99	Vertical
3	9351.5208	51.71	37.89	-42.87	46.73	74.00	27.27	Vertical
4	11659.666	47.03	39.43	-39.61	46.85	74.00	27.15	Vertical
5	14317.604	46.19	40.27	-38.77	47.69	68.30	20.61	Vertical
6	17835.166	45.59	43.81	-37.75	51.65	74.00	22.35	Vertical
7	17981.791	34.20	44.69	-37.03	41.86	54.00	12.14	Vertical

11ax(HE20)_TX_CH_157_Horizontal

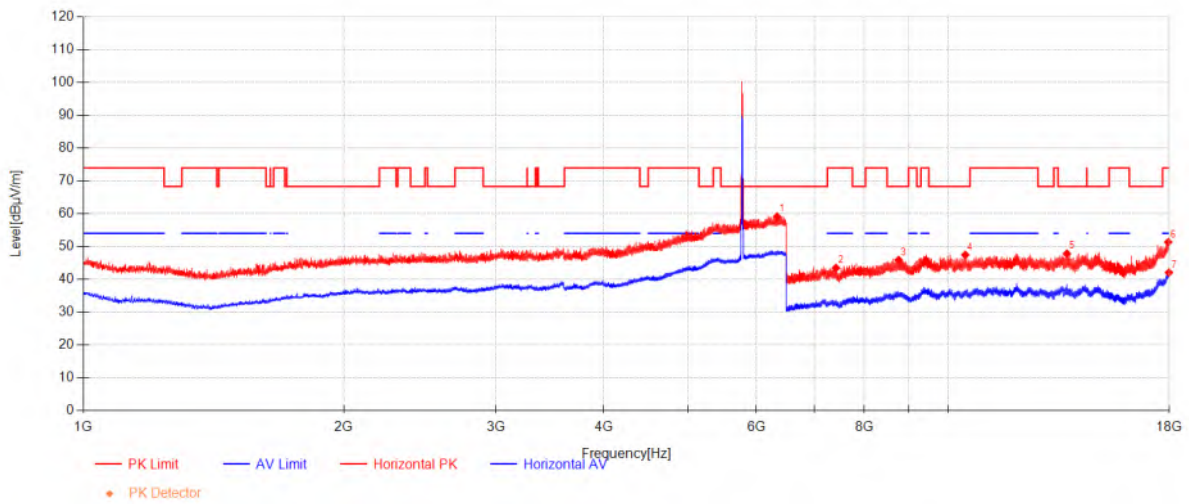


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6343.0385	41.23	34.10	-16.20	59.14	68.30	9.16	Horizontal
2	7417.6042	52.89	36.25	-45.66	43.48	74.00	30.52	Horizontal
3	8764.5417	52.54	37.14	-43.80	45.88	68.30	22.42	Horizontal
4	10466.062	49.11	39.13	-40.80	47.44	68.30	20.86	Horizontal
5	13717.687	45.99	39.88	-38.05	47.82	68.30	20.48	Horizontal
6	17969.333	43.80	44.62	-37.07	51.35	74.00	22.65	Horizontal
7	17999.520	34.26	44.80	-36.98	42.08	54.00	11.92	Horizontal

11ax(HE20)_TX_CH_157_Vertical

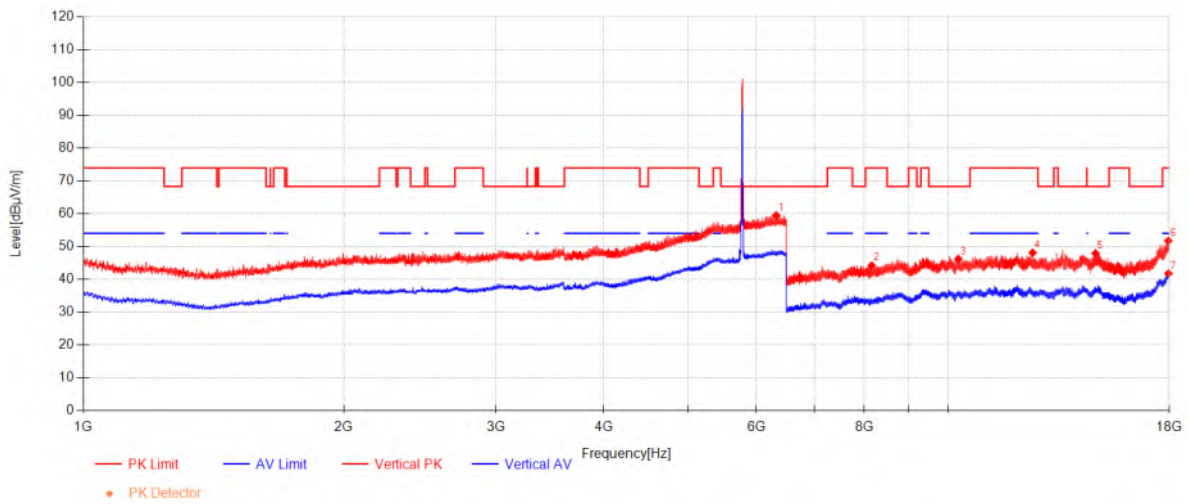


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6325.2692	41.67	34.04	-16.21	59.50	68.30	8.80	Vertical
2	8158.3958	52.03	36.47	-44.31	44.20	74.00	29.80	Vertical
3	10274.395	48.57	38.99	-41.34	46.23	68.30	22.07	Vertical
4	12523.604	47.95	39.09	-38.94	48.10	74.00	25.90	Vertical
5	14803	45.28	40.22	-37.57	47.93	68.30	20.37	Vertical
6	17970.291	44.18	44.62	-37.06	51.74	74.00	22.26	Vertical
7	17977.958	34.16	44.67	-37.04	41.79	54.00	12.21	Vertical

11ax(HE20)_TX_CH_165_Horizontal

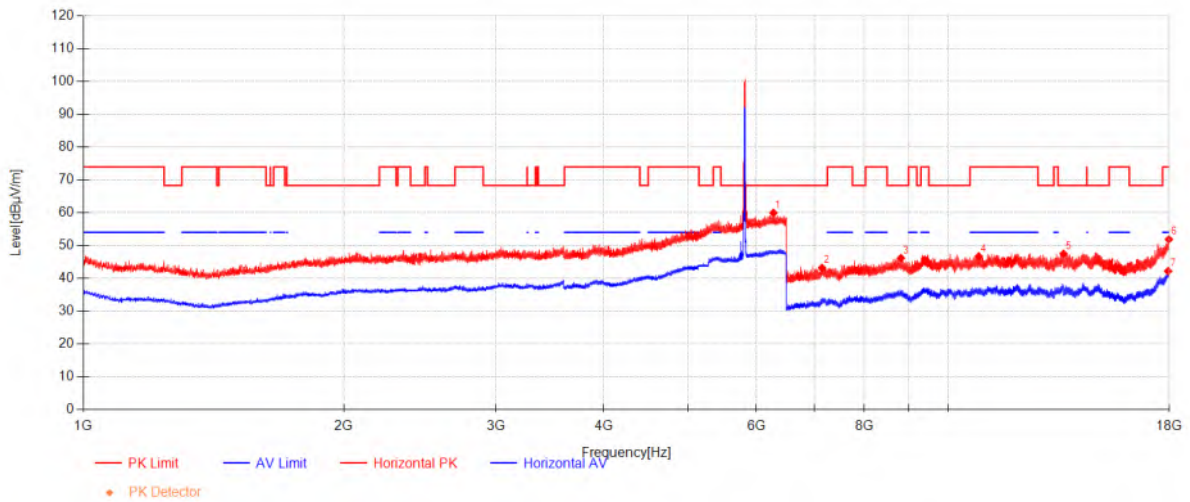


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6280	42.27	33.86	-16.20	59.94	68.30	8.36	Horizontal
2	7146.875	53.23	35.76	-45.80	43.19	68.30	25.11	Horizontal
3	8818.2083	52.78	37.20	-43.80	46.18	68.30	22.12	Horizontal
4	10848.437	47.60	39.39	-40.31	46.68	74.00	27.32	Horizontal
5	13597.895	46.07	39.70	-38.29	47.47	68.30	20.83	Horizontal
6	17999.041	44.07	44.79	-36.98	51.88	74.00	22.12	Horizontal
7	17962.625	34.69	44.58	-37.08	42.18	54.00	11.82	Horizontal

11ax(HE20)_TX_CH_165_Vertical

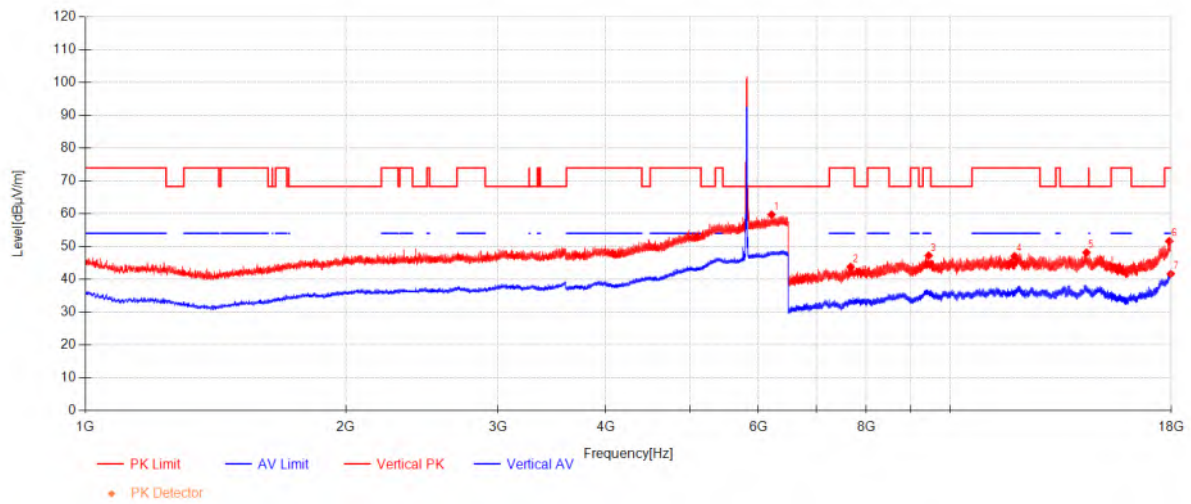


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6215.6923	42.20	33.62	-16.10	59.72	68.30	8.58	Vertical
2	7671.0833	52.49	36.37	-45.06	43.79	74.00	30.21	Vertical
3	9444.9583	51.95	38.02	-42.74	47.23	74.00	26.77	Vertical
4	11871.937	47.38	39.41	-39.72	47.07	74.00	26.93	Vertical
5	14374.145	46.62	40.26	-38.73	48.15	68.30	20.15	Vertical
6	17919.979	44.52	44.32	-37.20	51.64	74.00	22.36	Vertical
7	17996.166	33.88	44.78	-36.99	41.67	54.00	12.33	Vertical

11ax(HE40)_TX_CH_38_Horizontal

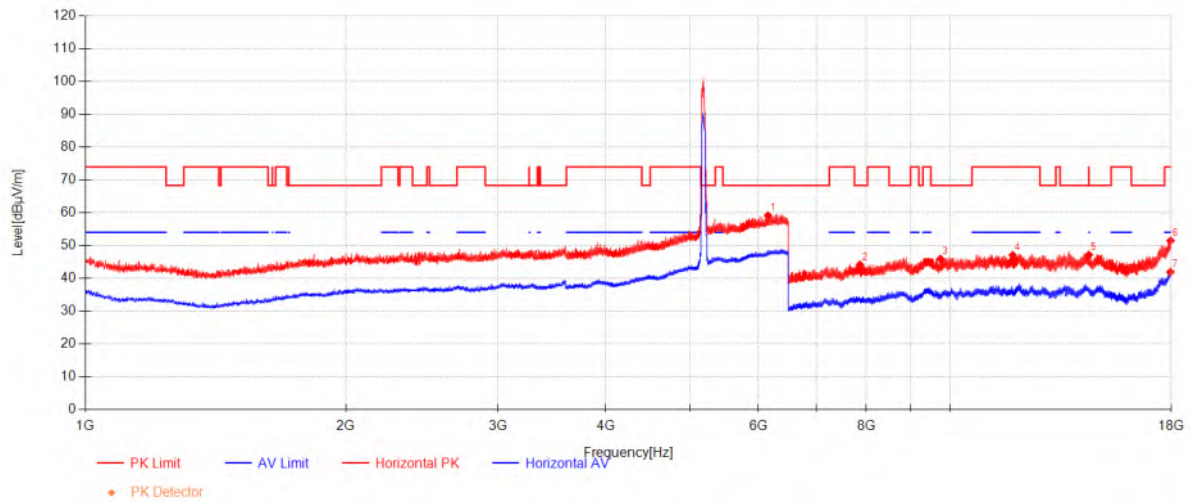


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6156.8846	42.00	33.40	-16.25	59.15	68.30	9.15	Horizontal
2	7863.2292	52.78	36.33	-44.94	44.16	68.30	24.14	Horizontal
3	9743.4792	49.66	38.44	-42.16	45.94	68.30	22.36	Horizontal
4	11811.562	47.00	39.42	-39.32	47.10	74.00	26.90	Horizontal
5	14469.020	45.34	40.25	-38.45	47.14	68.30	21.16	Horizontal
6	17985.145	43.83	44.71	-37.02	51.52	74.00	22.48	Horizontal
7	17973.166	34.37	44.64	-37.06	41.95	54.00	12.05	Horizontal

11ax(HE40)_TX_CH_38_Veritical

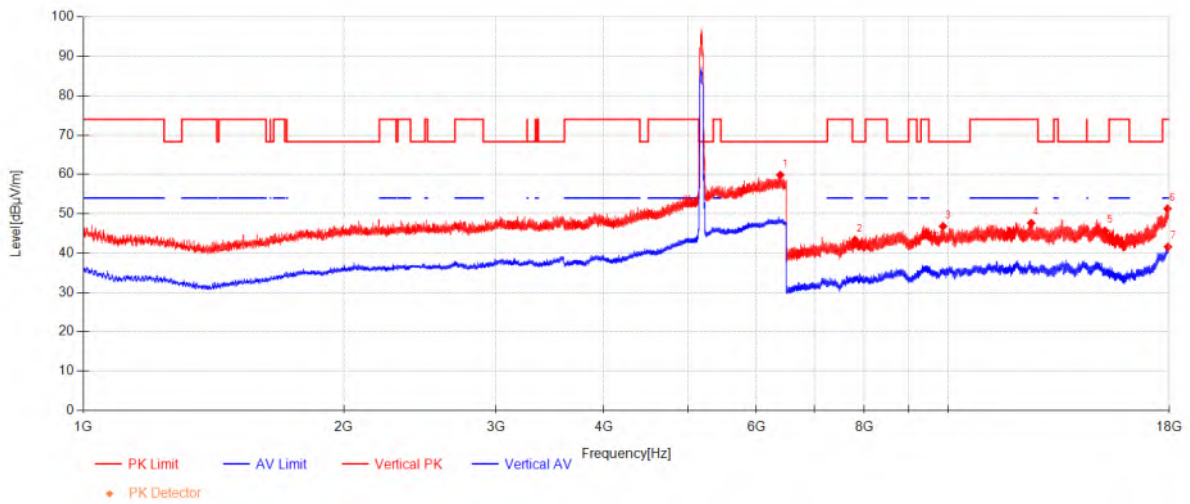


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6395.9231	41.69	34.30	-16.15	59.84	68.30	8.46	Vertical
2	7803.3333	51.93	36.34	-44.90	43.37	68.30	24.93	Vertical
3	9864.2292	50.09	38.61	-41.89	46.81	68.30	21.49	Vertical
4	12475.208	47.19	39.11	-38.69	47.62	74.00	26.38	Vertical
5	15179.145	43.53	39.88	-37.75	45.66	68.30	22.64	Vertical
6	17935.791	44.05	44.41	-37.16	51.30	74.00	22.70	Vertical
7	17955.437	34.15	44.53	-37.10	41.58	54.00	12.42	Vertical

11ax(HE40)_TX_CH_46_Horizontal

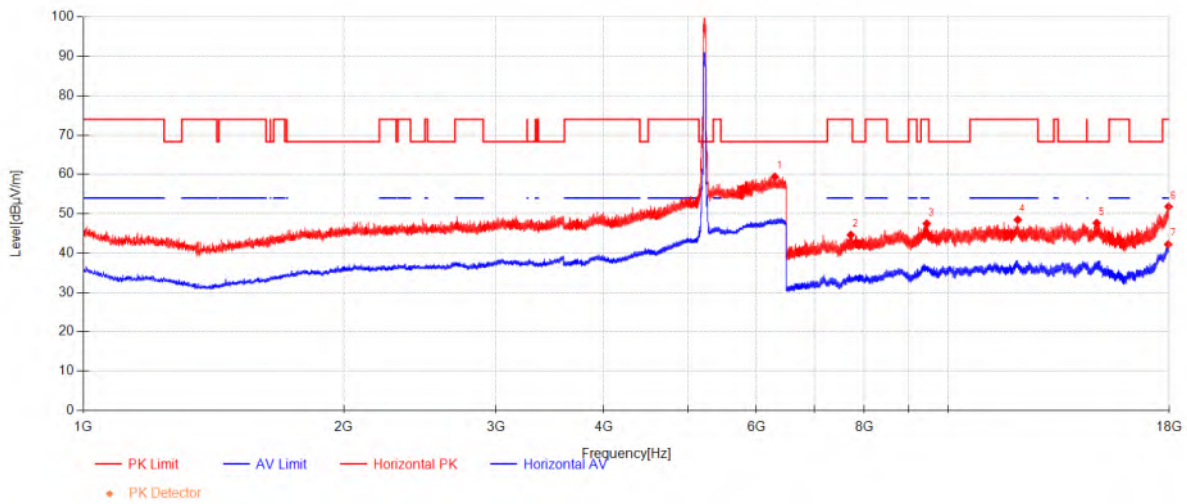


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6303.2692	41.65	33.95	-16.23	59.38	68.30	8.92	Horizontal
2	7716.125	53.34	36.36	-45.10	44.60	74.00	29.40	Horizontal
3	9445.4375	52.18	38.02	-42.74	47.47	74.00	26.53	Horizontal
4	12038.208	47.97	39.38	-38.88	48.47	74.00	25.53	Horizontal
5	14852.354	45.43	40.21	-37.99	47.65	68.30	20.65	Horizontal
6	17982.270	44.14	44.69	-37.03	51.80	74.00	22.20	Horizontal
7	17964.062	34.72	44.58	-37.08	42.22	54.00	11.78	Horizontal

11ax(HE40)_TX_CH_46_Vertical

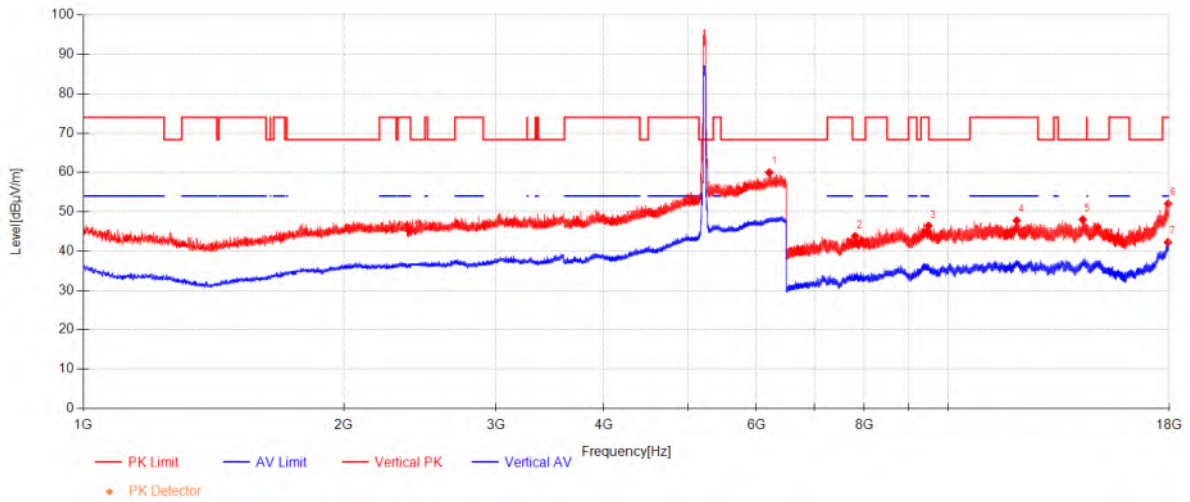


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6211.4615	42.43	33.60	-16.09	59.95	68.30	8.35	Vertical
2	7808.125	52.38	36.34	-44.91	43.81	68.30	24.49	Vertical
3	9490.9583	51.02	38.09	-42.66	46.44	74.00	27.56	Vertical
4	12003.708	46.95	39.40	-38.59	47.76	74.00	26.24	Vertical
5	14308.979	46.52	40.27	-38.77	48.02	68.30	20.28	Vertical
6	17965.020	44.53	44.59	-37.08	52.04	74.00	21.96	Vertical
7	17951.125	34.84	44.51	-37.12	42.23	54.00	11.77	Vertical

11ax(HE40)_TX_CH_54_Horizontal

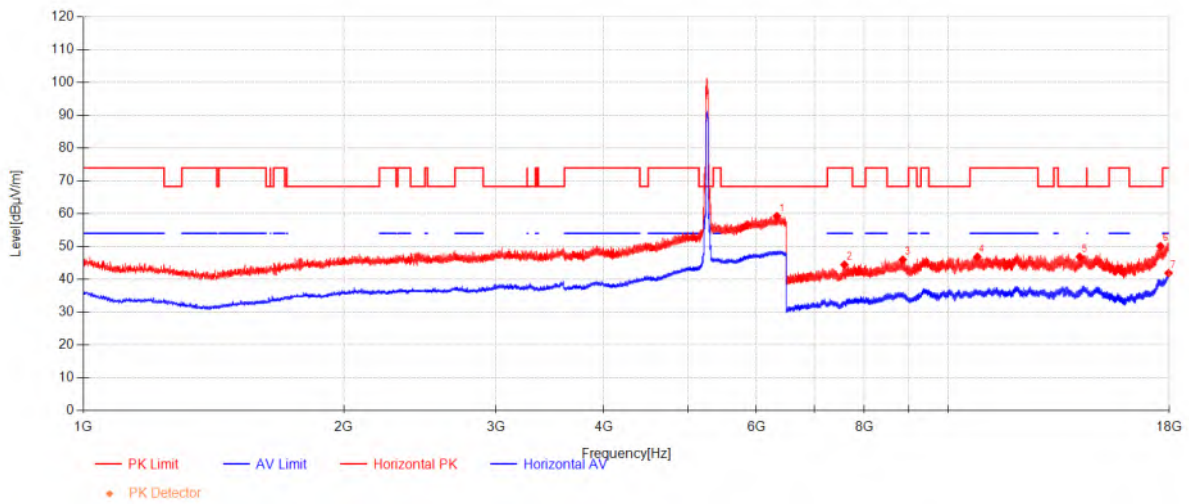


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6339.6538	41.40	34.09	-16.20	59.29	68.30	9.01	Horizontal
2	7586.2708	53.12	36.38	-45.05	44.45	74.00	29.55	Horizontal
3	8861.3333	52.41	37.25	-43.67	45.99	68.30	22.31	Horizontal
4	10810.104	47.92	39.37	-40.42	46.87	74.00	27.13	Horizontal
5	14196.375	44.76	40.28	-38.17	46.87	68.30	21.43	Horizontal
6	17597.5	44.46	42.38	-36.71	50.13	68.30	18.17	Horizontal
7	17981.791	34.26	44.69	-37.03	41.92	54.00	12.08	Horizontal

11ax(HE40)_TX_CH_54_Vertical

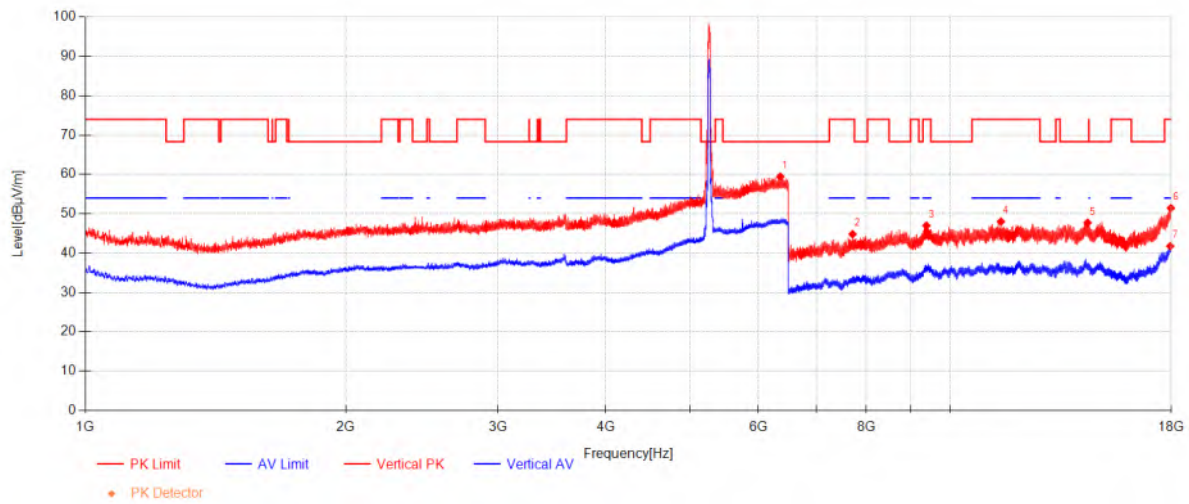


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6361.6538	41.45	34.17	-16.18	59.44	68.30	8.86	Vertical
2	7711.8125	53.55	36.36	-45.11	44.80	74.00	29.20	Vertical
3	9386.5	51.88	37.94	-42.83	46.99	74.00	27.01	Vertical
4	11446.437	48.43	39.46	-39.89	48.00	74.00	26.00	Vertical
5	14419.187	46.11	40.26	-38.64	47.73	68.30	20.57	Vertical
6	17998.562	43.65	44.79	-36.98	51.46	74.00	22.54	Vertical
7	17966.937	34.24	44.60	-37.07	41.77	54.00	12.23	Vertical

11ax(HE40)_TX_CH_62_Horizontal

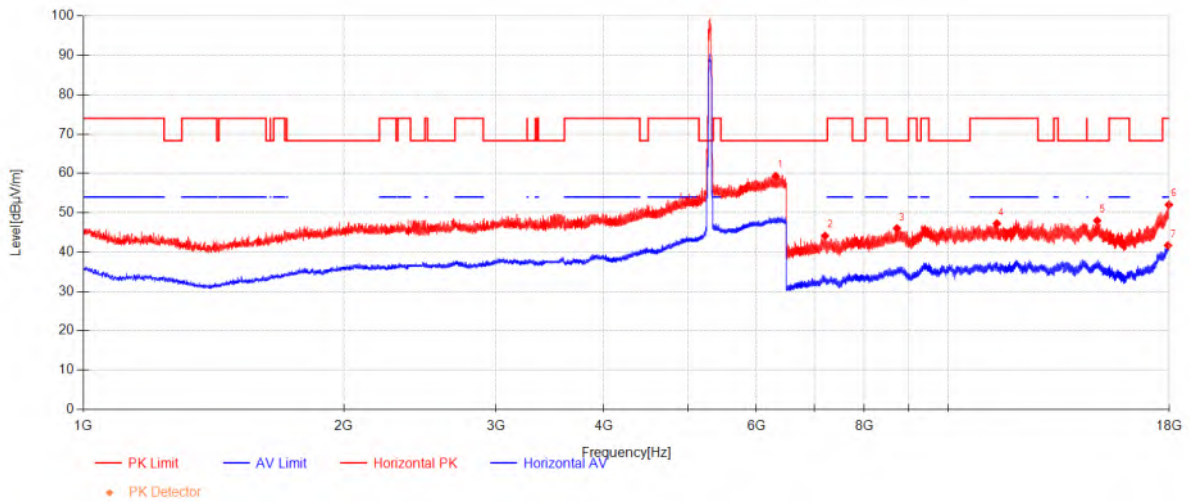


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6317.2308	41.54	34.01	-16.22	59.33	68.30	8.97	Horizontal
2	7204.8542	53.73	35.87	-45.48	44.12	68.30	24.18	Horizontal
3	8727.6458	52.67	37.10	-43.74	46.03	68.30	22.27	Horizontal
4	11384.145	47.62	39.46	-39.83	47.25	74.00	26.75	Horizontal
5	14871.520	45.93	40.21	-38.16	47.99	68.30	20.31	Horizontal
6	17999.041	44.21	44.79	-36.98	52.02	74.00	21.98	Horizontal
7	17957.354	34.27	44.54	-37.10	41.71	54.00	12.29	Horizontal

11ax(HE40)_TX_CH_62_Vertical

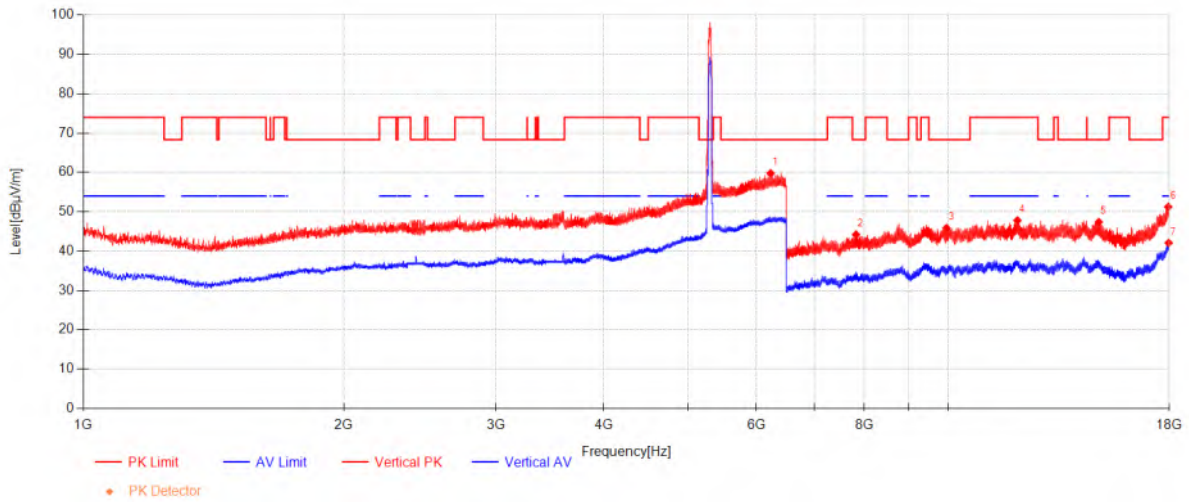

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6232.1923	42.20	33.68	-16.12	59.76	68.30	8.54	Vertical
2	7825.8542	52.78	36.33	-44.92	44.20	68.30	24.10	Vertical
3	9956.7083	48.89	38.74	-41.77	45.86	68.30	22.44	Vertical
4	12025.75	47.20	39.38	-38.78	47.81	74.00	26.19	Vertical
5	14934.770	45.40	40.21	-38.22	47.38	68.30	20.92	Vertical
6	17966.458	43.73	44.60	-37.07	51.25	74.00	22.75	Vertical
7	17988.5	34.37	44.73	-37.01	42.09	54.00	11.91	Vertical


11ax(HE40)_TX_CH_102_Horizontal

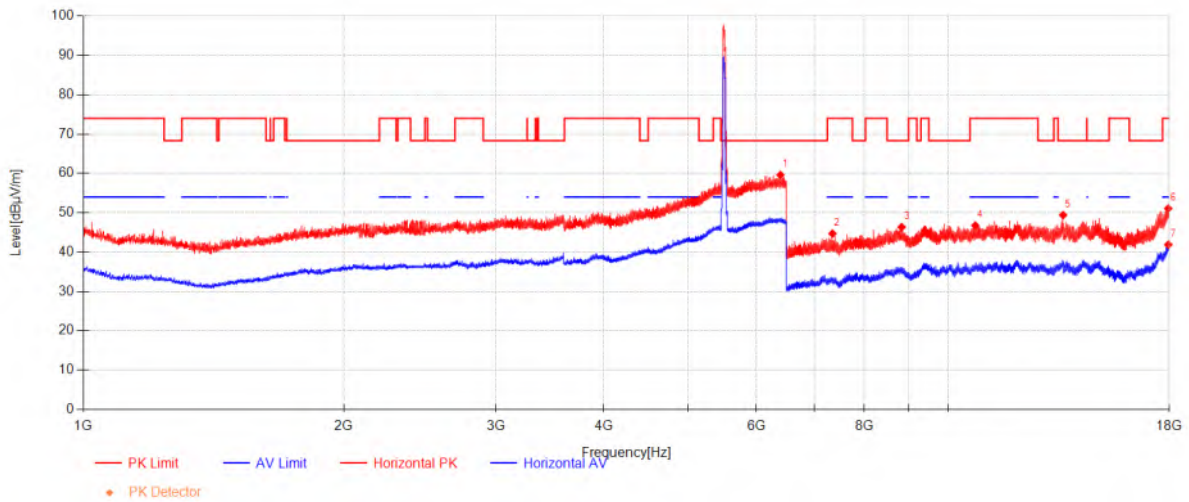

Data List


NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6397.1923	41.46	34.31	-16.15	59.62	68.30	8.68	Horizontal
2	7349.0833	54.37	36.13	-45.79	44.71	74.00	29.29	Horizontal
3	8834.9792	52.88	37.22	-43.75	46.35	68.30	21.95	Horizontal
4	10749.729	48.06	39.32	-40.63	46.75	74.00	27.25	Horizontal
5	13579.687	48.14	39.67	-38.42	49.39	68.30	18.91	Horizontal
6	17966.458	43.57	44.60	-37.07	51.09	74.00	22.91	Horizontal
7	17971.729	34.31	44.63	-37.06	41.88	54.00	12.12	Horizontal

11ax(HE40)_TX_CH_102_Vertical

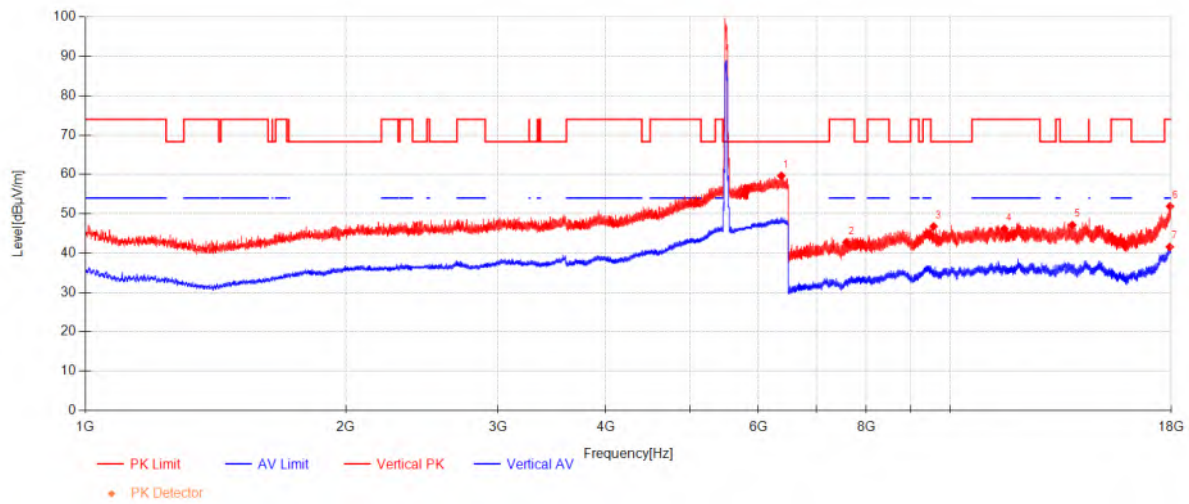


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6379.8462	41.57	34.24	-16.17	59.65	68.30	8.65	Vertical
2	7585.3125	51.42	36.38	-45.06	42.74	74.00	31.26	Vertical
3	9569.0625	50.59	38.20	-42.01	46.77	68.30	21.53	Vertical
4	11552.333	46.36	39.44	-39.63	46.17	74.00	27.83	Vertical
5	13843.708	45.51	40.07	-38.44	47.13	68.30	21.17	Vertical
6	17956.875	44.46	44.54	-37.10	51.90	74.00	22.10	Vertical
7	17944.895	34.23	44.47	-37.13	41.57	54.00	12.43	Vertical

11ax(HE40)_TX_CH_110_Horizontal

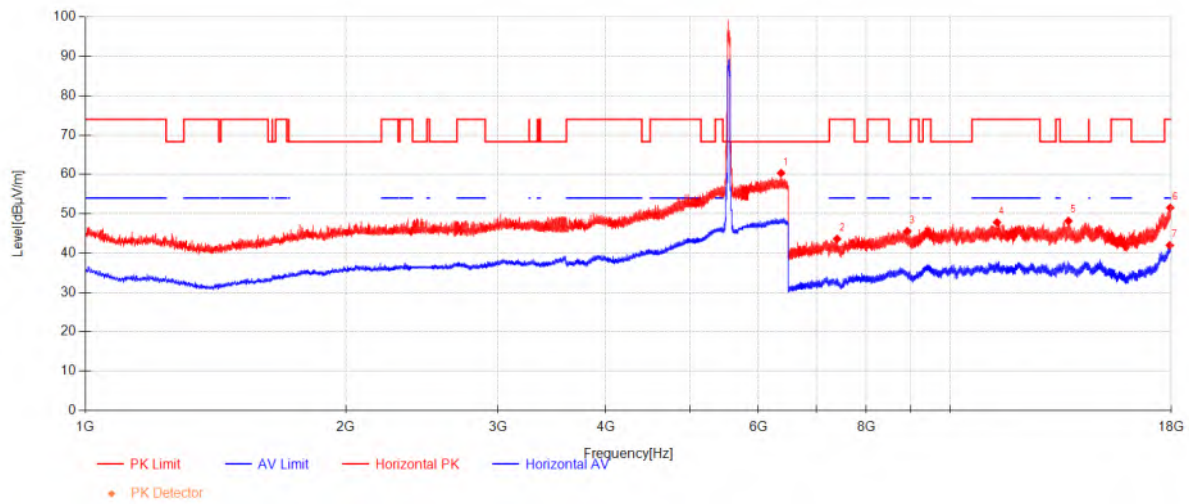


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6375.1923	42.27	34.23	-16.17	60.33	68.30	7.97	Horizontal
2	7399.875	52.94	36.22	-45.56	43.60	74.00	30.40	Horizontal
3	8922.1875	51.80	37.31	-43.57	45.55	68.30	22.75	Horizontal
4	11328.562	48.57	39.47	-40.24	47.80	74.00	26.20	Horizontal
5	13701.395	46.28	39.85	-37.96	48.17	68.30	20.13	Horizontal
6	17966.937	43.99	44.60	-37.07	51.52	74.00	22.48	Horizontal
7	17942.979	34.65	44.46	-37.14	41.97	54.00	12.03	Horizontal

11ax(HE40)_TX_CH_110_Vertical

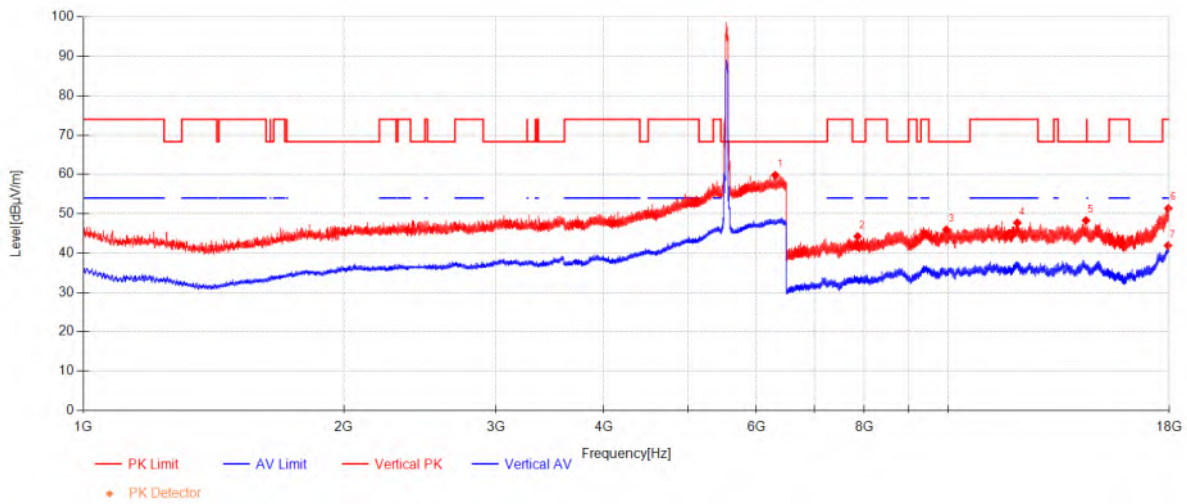


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6310.8846	42.06	33.98	-16.22	59.82	68.30	8.48	Vertical
2	7857.9583	52.86	36.33	-44.94	44.25	68.30	24.05	Vertical
3	9950.9583	48.99	38.73	-41.77	45.95	68.30	22.35	Vertical
4	12021.916	47.07	39.39	-38.74	47.71	74.00	26.29	Vertical
5	14433.562	46.62	40.26	-38.59	48.29	68.30	20.01	Vertical
6	17971.25	43.81	44.63	-37.06	51.38	74.00	22.62	Vertical
7	17954.958	34.49	44.53	-37.11	41.91	54.00	12.09	Vertical

11ax(HE40)_TX_CH_134_Horizontal

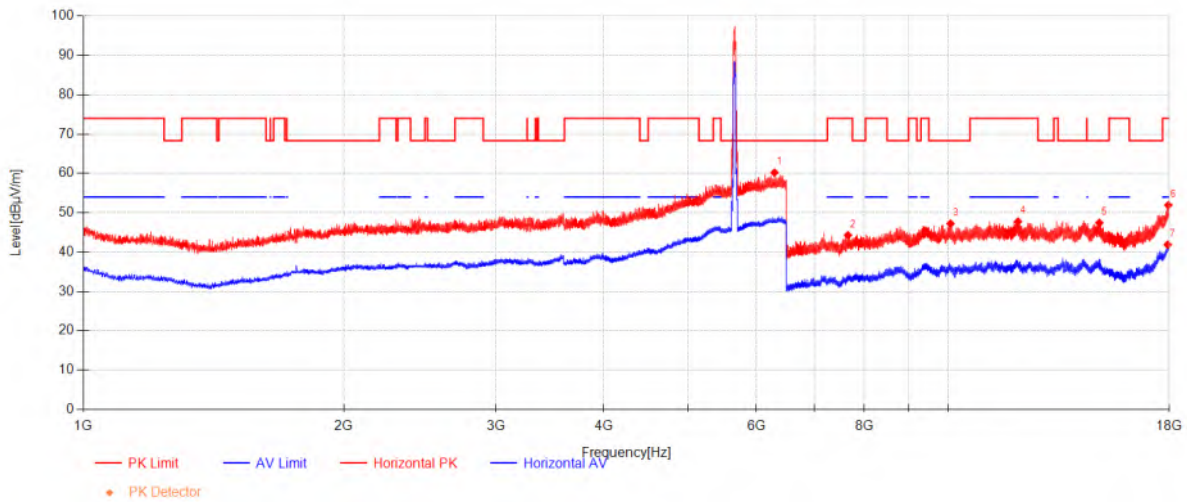


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6298.6154	42.49	33.93	-16.23	60.20	68.30	8.10	Horizontal
2	7659.1042	52.95	36.37	-45.03	44.28	74.00	29.72	Horizontal
3	10064.520	50.05	38.85	-41.67	47.23	68.30	21.07	Horizontal
4	12044.916	47.32	39.37	-38.94	47.76	74.00	26.24	Horizontal
5	14959.208	45.32	40.20	-38.10	47.43	68.30	20.87	Horizontal
6	17970.770	44.38	44.62	-37.06	51.94	74.00	22.06	Horizontal
7	17941.062	34.58	44.45	-37.15	41.88	54.00	12.12	Horizontal

11ax(HE40)_TX_CH_134_Vertical

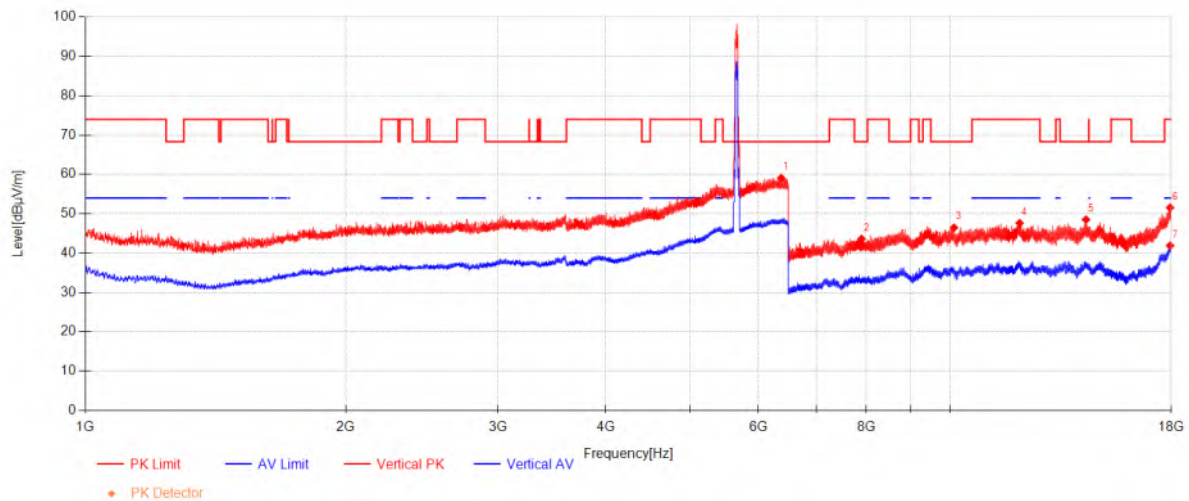


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6377.3077	41.01	34.23	-16.17	59.08	68.30	9.22	Vertical
2	7898.2083	52.25	36.32	-44.97	43.60	68.30	24.70	Vertical
3	10100.937	49.23	38.87	-41.63	46.47	68.30	21.83	Vertical
4	12031.979	47.07	39.38	-38.83	47.62	74.00	26.38	Vertical
5	14358.333	46.99	40.26	-38.74	48.51	68.30	19.79	Vertical
6	17963.583	44.06	44.58	-37.08	51.56	74.00	22.44	Vertical
7	17960.229	34.43	44.56	-37.09	41.90	54.00	12.10	Vertical

11ax(HE80)_TX_CH_42_Horizontal

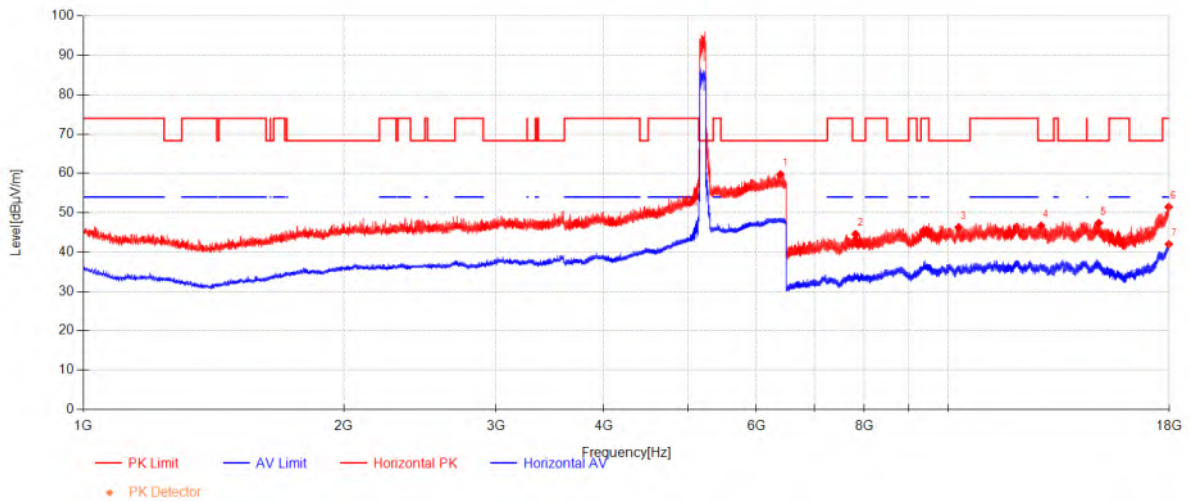


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6397.6154	41.57	34.31	-16.15	59.73	68.30	8.57	Horizontal
2	7814.3542	53.13	36.34	-44.91	44.56	68.30	23.74	Horizontal
3	10283.020	48.55	39.00	-41.25	46.30	68.30	22.00	Horizontal
4	12807.75	46.98	38.92	-39.21	46.68	68.30	21.62	Horizontal
5	14935.729	45.40	40.21	-38.22	47.39	68.30	20.91	Horizontal
6	17986.583	43.78	44.72	-37.02	51.48	74.00	22.52	Horizontal
7	17997.604	34.21	44.79	-36.99	42.01	54.00	11.99	Horizontal

11ax(HE80)_TX_CH_42_Vertical

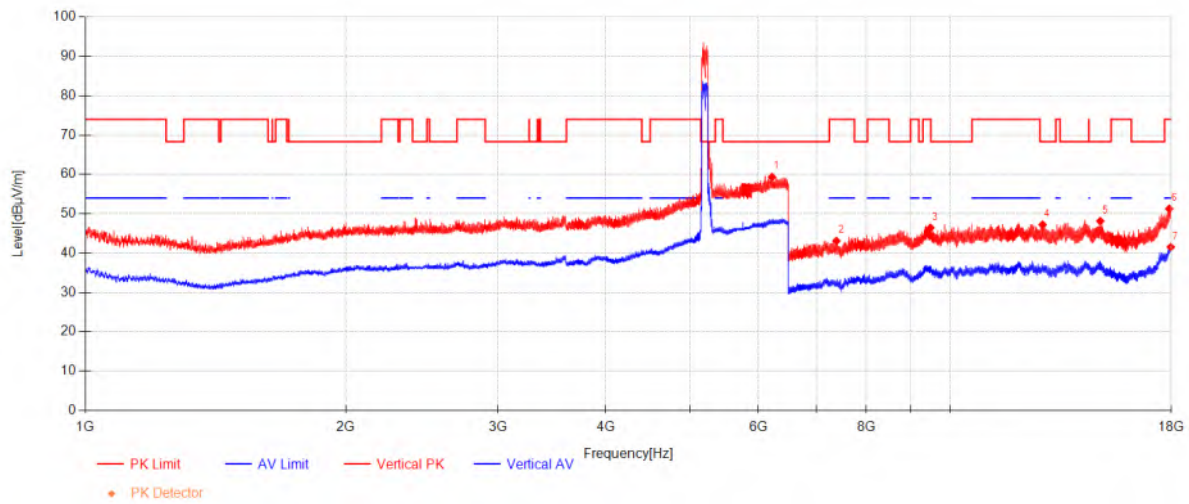

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6223.3077	41.79	33.65	-16.11	59.33	68.30	8.97	Vertical
2	7387.4167	52.51	36.20	-45.62	43.09	74.00	30.91	Vertical
3	9489.5208	51.03	38.09	-42.67	46.45	74.00	27.55	Vertical
4	12790.979	47.55	38.93	-39.26	47.22	68.30	21.08	Vertical
5	14910.812	46.27	40.21	-38.34	48.13	68.30	20.17	Vertical
6	17922.375	44.13	44.33	-37.20	51.27	74.00	22.73	Vertical
7	17993.291	33.78	44.76	-37.00	41.54	54.00	12.46	Vertical


11ax(HE80)_TX_CH_58_Horizontal

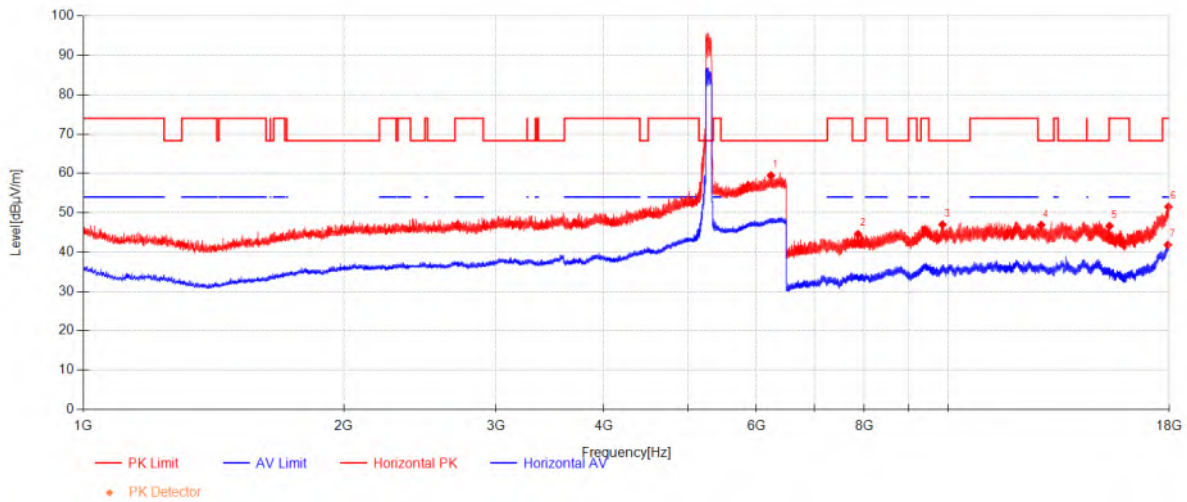

Data List


NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6238.5385	41.91	33.71	-16.13	59.48	68.30	8.82	Horizontal
2	7865.1458	53.18	36.33	-44.95	44.56	68.30	23.74	Horizontal
3	9850.8125	50.31	38.59	-41.92	46.98	68.30	21.32	Horizontal
4	12812.062	47.13	38.91	-39.18	46.87	68.30	21.43	Horizontal
5	15366.020	45.03	39.54	-37.95	46.63	74.00	27.37	Horizontal
6	17977	43.89	44.66	-37.04	51.51	74.00	22.49	Horizontal
7	17948.729	34.48	44.49	-37.12	41.85	54.00	12.15	Horizontal

11ax(HE80)_TX_CH_58_Vertical

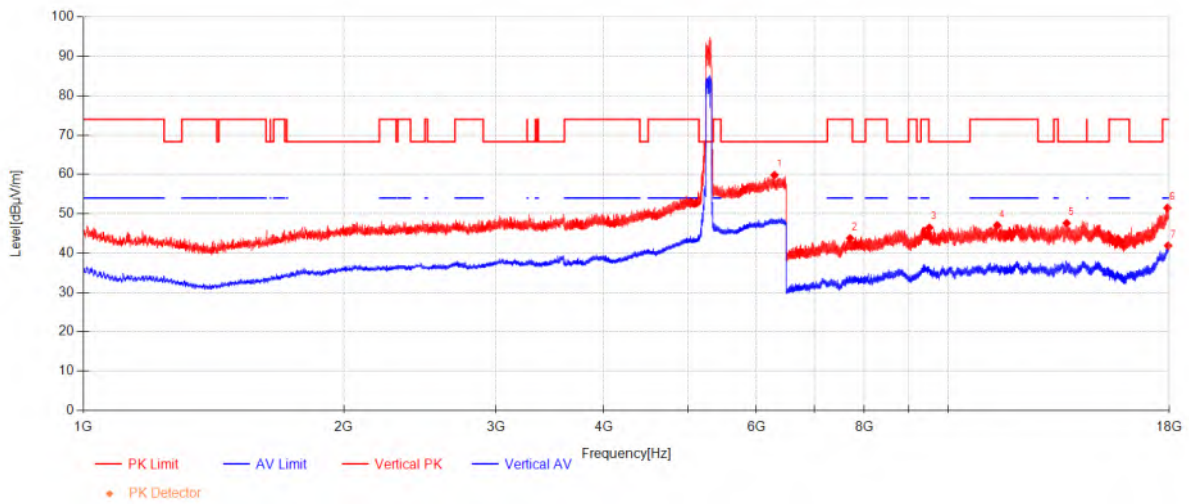


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6297.7692	42.10	33.93	-16.23	59.81	68.30	8.49	Vertical
2	7702.7083	52.54	36.36	-45.13	43.77	74.00	30.23	Vertical
3	9512.0417	50.89	38.12	-42.54	46.47	68.30	21.83	Vertical
4	11395.166	47.36	39.46	-39.75	47.07	74.00	26.93	Vertical
5	13711.937	45.76	39.87	-38.02	47.61	68.30	20.69	Vertical
6	17931	44.26	44.39	-37.17	51.47	74.00	22.53	Vertical
7	17962.145	34.40	44.57	-37.09	41.89	54.00	12.11	Vertical

11ax(HE80)_TX_CH_106_Horizontal

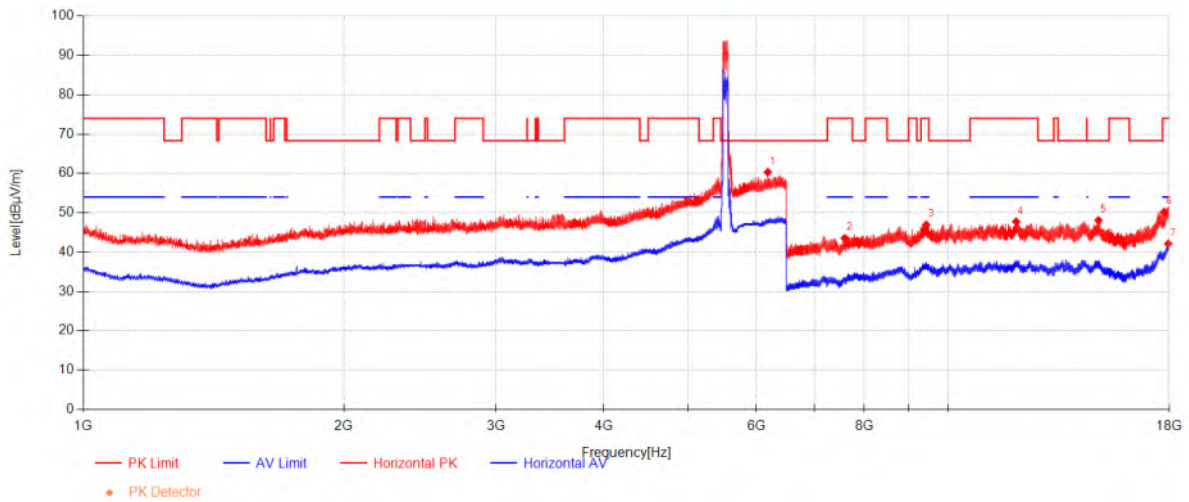


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6185.6538	42.94	33.51	-16.13	60.32	68.30	7.98	Horizontal
2	7590.1042	52.16	36.38	-45.00	43.54	74.00	30.46	Horizontal
3	9432.9792	51.71	38.01	-42.76	46.96	74.00	27.04	Horizontal
4	11985.020	47.10	39.40	-38.76	47.74	74.00	26.26	Horizontal
5	14921.354	46.14	40.21	-38.29	48.06	68.30	20.24	Horizontal
6	17769.041	44.75	43.41	-37.95	50.21	74.00	23.79	Horizontal
7	17966.458	34.61	44.60	-37.07	42.13	54.00	11.87	Horizontal

11ax(HE80)_TX_CH_106_Vertical

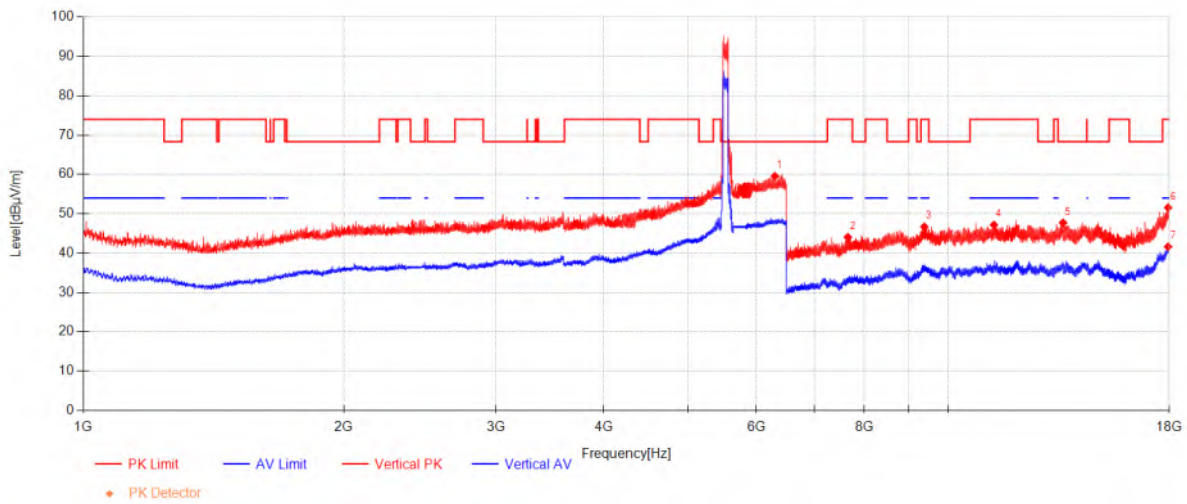

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6303.6923	41.84	33.95	-16.23	59.57	68.30	8.73	Vertical
2	7655.75	52.72	36.37	-45.02	44.06	74.00	29.94	Vertical
3	9384.5833	51.58	37.94	-42.83	46.69	74.00	27.31	Vertical
4	11296.937	48.12	39.47	-40.43	47.16	74.00	26.84	Vertical
5	13579.687	46.46	39.67	-38.42	47.71	68.30	20.59	Vertical
6	17959.270	44.11	44.56	-37.09	51.57	74.00	22.43	Vertical
7	17960.229	34.16	44.56	-37.09	41.63	54.00	12.37	Vertical

11ax(HE80)_TX_CH_122_Horizontal

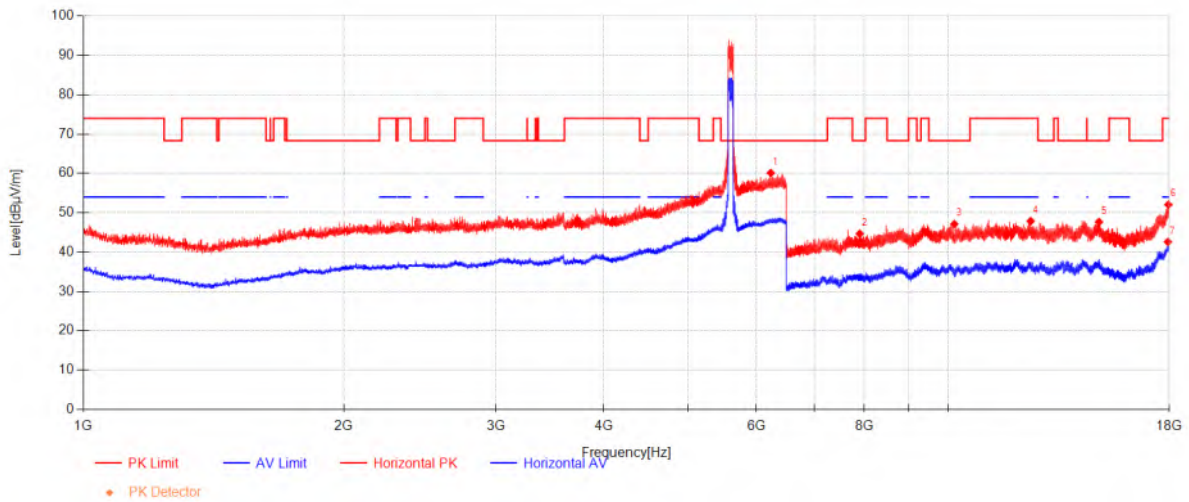

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6236.4231	42.55	33.70	-16.13	60.12	68.30	8.18	Horizontal
2	7902.5208	53.30	36.32	-44.95	44.67	68.30	23.63	Horizontal
3	10164.666	50.14	38.92	-41.92	47.13	68.30	21.17	Horizontal
4	12456.520	47.36	39.13	-38.59	47.89	74.00	26.11	Horizontal
5	14943.395	45.63	40.21	-38.18	47.66	68.30	20.64	Horizontal
6	17976.041	44.45	44.66	-37.05	52.06	74.00	21.94	Horizontal
7	17948.729	35.23	44.49	-37.12	42.60	54.00	11.40	Horizontal