

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

UN-INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART B REQUIREMENT

OF

Product Name: GSM 850/1900 mobile phone

Brand Name: Sagem

Model Name: A2005sa

Market Name: my100B or my100L

Report No.: ER/2005/C0035-01

Issue Date: Feb. 08, 2006

FCC Rule Part: Part 15B

Prepared for SAGEM Communication
2,rue du Petit Albi BP28250
95801 CERGY PONTOISE Cedex

Prepared by SGS Taiwan Ltd.

No. 134, Wu Kung Rd., Wuku Industrial Zone,
Taipei County, Taiwan.

Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

VERIFICATION OF COMPLIANCE

Applicant: SAGEM Communication
2, rue du Petit Albi BP28250
95801 CERGY PONTOISE Cedex

Product Description: GSM 850/1900 mobile phone

Brand Name: Sagem

Model No.: A2005sa

Market Name: my100B or my100L

Model Difference: N/A

File Number: EM/2005/C0035-01


Date of test: Dec. 15, 2005 ~ Feb. 07, 2006

Date of EUT Receive: Dec. 15, 2005 and Jan. 27, 2006

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15B .

The test results of this report relate only to the tested sample identified in this report.

Test By:		Date	Feb. 08, 2006
	Sky Wang		
Prepared By:		Date	Feb. 08, 2006
	Cathy Kuo		
Approved By:		Date	Feb. 08, 2006
	Vincent Su		

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Version

Version No.	Date
00	Dec. 27, 2005
01	Feb. 08, 2006

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Table of Contents

1.	GENERAL INFORMATION	5
1.1	PRODUCT DESCRIPTION	5
1.2	RELATED SUBMITTAL(S) / GRANT (S)	5
1.3	TEST METHODOLOGY.....	6
1.4	TEST FACILITY	6
2.	SYSTEM TEST CONFIGURATION	7
2.1	EUT CONFIGURATION.....	7
2.2	EUT EXERCISE	7
2.3	TEST PROCEDURE.....	7
2.4	LIMITATION	8
2.5	CONFIGURATION OF TESTED SYSTEM.....	9
3.	SUMMARY OF TEST RESULTS	9
4.	DESCRIPTION OF TEST MODES	10
5.	CONDUCTED EMISSIONS TEST	11
5.1	MEASUREMENT PROCEDURE:	11
5.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	11
5.3	MEASUREMENT EQUIPMENT USED:	12
5.4	MEASUREMENT RESULT:	12
6.	RADIATED EMISSION TEST	13
6.1	MEASUREMENT PROCEDURE.....	47
6.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	47
6.3	MEASUREMENT EQUIPMENT USED:	49
6.4	FIELD STRENGTH CALCULATION	49
6.5	MEASUREMENT RESULT	50
	APPENDIX 1 PHOTOGRPHS OF SET UP	69
	APPENDIX 2 PHOTOGRPHS OF EUT	73
	APPENDIX 3 LABELING REQUIREMENTS	85

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1. GENERAL INFORMATION

1.1 Product Description

Product	GSM 850/1900 mobile phone	
Model Name	A2005sa	
Market Name	my100B or my100L	
Model Difference:	N/A	
Trade Name	Sagem	
Frequency Range and Power	TX: 824.2 MHz – 848.8 MHz	33 dBm
	TX: 1850.2MHz –1909.8MHz	30 dBm
Type of Emission	300KGXW	
Power Supply	3.7 Vdc re-chargeable battery or 5Vdc by AC/DC power adapter	
	Model:	Eight 5V DC by AC/DC Adapters, Input :100-240Vac, 0.3A, 50/60Hz, Output: 5Vdc, 0.4A 1.SAGEM, powersupply1 with 18 867 925-5; 2.SAGEM, powersupply2 with 18 865 855-8; 3.SAGEM, powersupply3 with 18 865 853-7; 4.SAGEM, powersupply4 with 18 864 404-6; 5.SAGEM, powersupply5 with 18 869 2000; 6.SAGEM, powersupply6 with 18 910 715-4; 7.SAGEM, powersupply7 with 18 910 719-6; 8.SAGEM, powersupply8 with 18 910 718-8 One Car Charger Input :12-24Vdc, 0.4A, Output: 6.5Vdc, 0.5A 1.SAGEM, cigar light adapter with 18 871 842-4

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC Part15 Subpart B is authorized under a DoC procedure.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the address of SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 1993 and CISPR 22/EN 55022 requirements. Site No. 1(3 &10 meters) Registration Number: 94644, Anechoic chamber (3 meters) was accredited by CNLA(0513) and NVLAP (200704-0).

1.5 Special Accessories

Not available for this EUT intended for grant.

1.6 Equipment Modifications

Not available for this EUT intended for grant.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT was operated in the normal continuous transmitting.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 7 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.4-2003.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.4 Limitation

(1) Conducted Emission

According to section 15.107(a) Conducted Emission Limits is as following.

Frequency range MHz	Class B Limits dB (uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note		
1.The lower limit shall apply at the transition frequencies		
2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		

(2) Radiated Emission

According to section 15.109(a) Radiated Emission Class B Limits is as following:

Frequency (MHz)	Field strength $\mu\text{V/m}$	Distance (m)	Field strength at 3m $\text{dB}\mu\text{V/m}$
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Remark: 1. Emission level in $\text{dB}\mu\text{V/m}=20 \log (\mu\text{V/m})$

2. Measurement was performed at an antenna to the closed point of EUT distance of 3 meters.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.5 Configuration of Tested System

Fig. 2-1 Configuration of Tested System

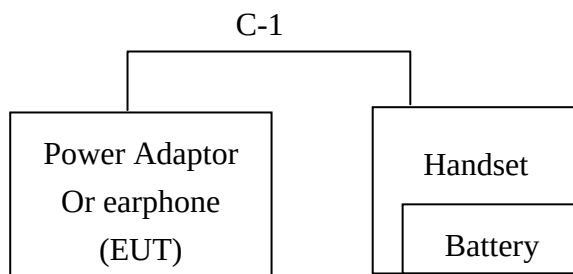


Fig. 2-2 Configuration of Tested System

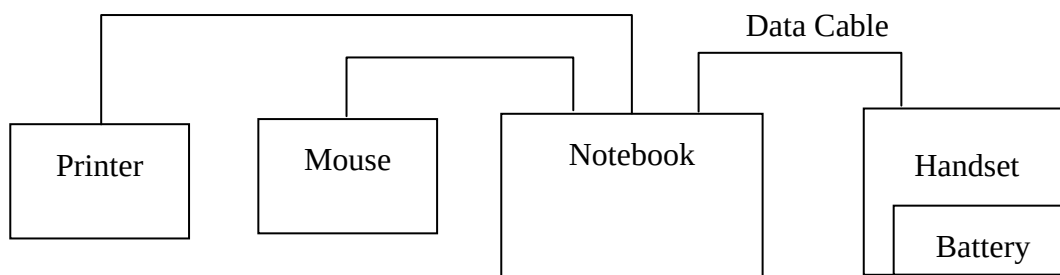


Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	Notebook	TOHSHIBA	PSA10L-3V1JDP	N/A	1.2m, shielding	1.8m, un-shiending
2.	Printer	HP	DJ640C	TH12QE110Y	1.8m, shielding	1.8m, un-shiending
3.	Mouse	HP	P8131-D	K023302209	1.8m, shielding	N/A

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3. Summary of Test Results

FCC Rules	Description Of Test	Result
§15.107	Conducted Emission Class B	Compliant
§15.109	Radiated Emission Class B	Compliant

4. Description of test modes

The EUT is stay in normal operating mode.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

5. Conducted Emissions Test

5.1 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

5.2 Test SET-UP (Block Diagram of Configuration)

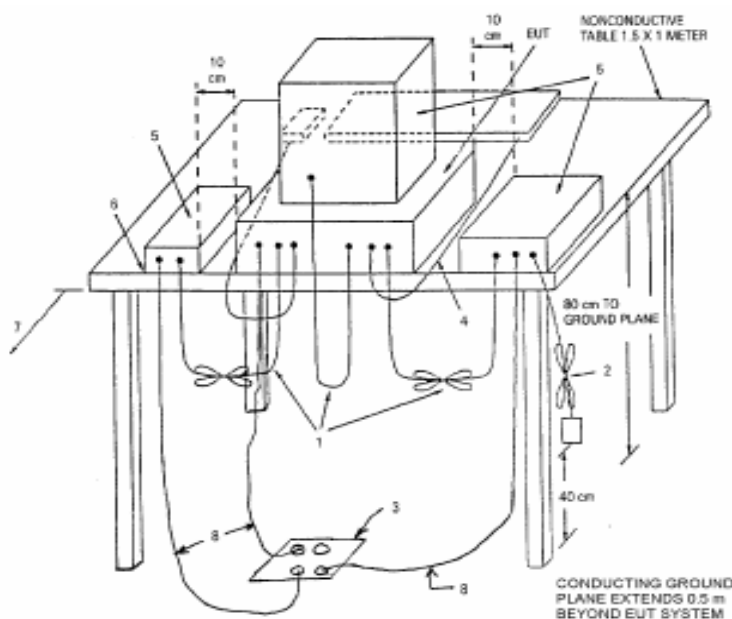


LEGEND:

- 1) Interconnecting cables that hang closer than 40 cm to the groundplane shall be folded back and forth in the center, forming a bundle 30 to 40 cm long (see 6.1.4 and 11.2.4).
- 2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated if required using the correct terminating impedance. The total length shall not exceed 1 m (see 6.1.4).
- 3) If LISNs are kept in the test setup for radiated emissions, it is preferred that they be installed under the groundplane with the receptacle flush with the groundplane (see 6.1.4).
- 4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use (see 6.2.1.3 and 11.2.4).
- 5) Non-EUT components of EUT system being tested (see also Figure 13).
- 6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop (see 6.2.1.1 and 6.2.1.2).
- 7) No vertical conducting plane used (see 5.2.2).
- 8) Power cords drape to the floor and are routed over to receptacle (see 6.1.4).

Figure 11a—Test arrangement for radiated emissions tabletop equipment

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

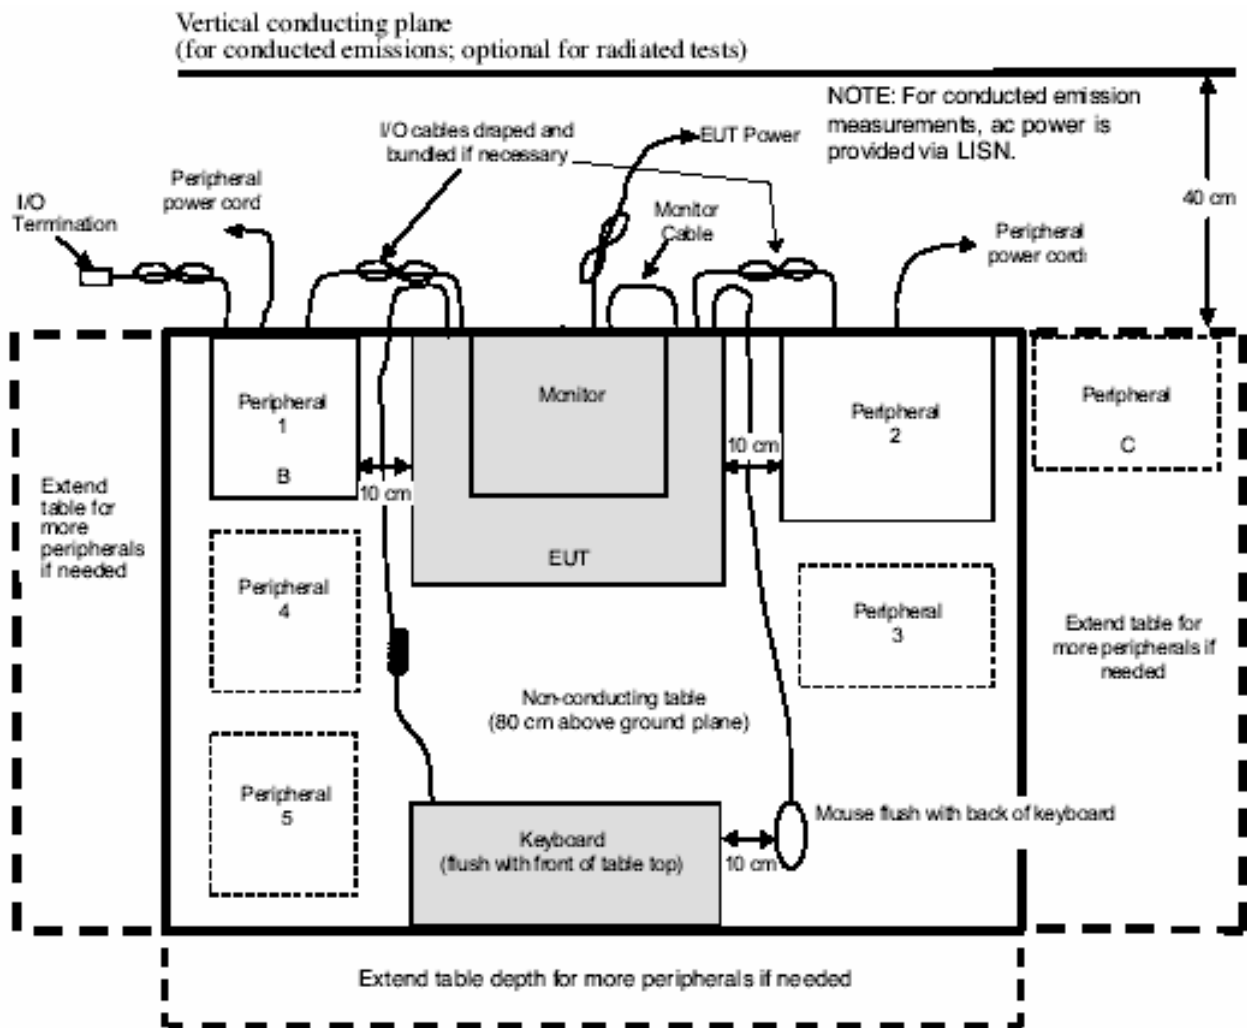

5.3 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMC Analyzer	HP	8594EM	3624A00203	09/02/2005	09/03/2006
EMI Test Receiver	R&S	ESCS30	828985/004	06/09/2005	06/10/2006
Transient Limiter	HP	11947A	3107A02062	09/02/2005	09/03/2006
LISN	Rolf-Heine	NNB-2/16Z	99012	12/26/2005	12/25/2006
LISN	Rolf-Heine	NNB-2/16Z	99013	12/24/2005	12/23/2006
Coaxial Cables	N/A	No. 3, 4	N/A	12/24/2005	12/23/2006

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


5.4 Measurement Result:

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM 850
Fundamental Frequency : N/A
Temperature : 23°C
Humidity : 57%
Test Voltage : 120Vac

Test Date : Dec.20, 2005
Test By : Sky
Pol : Line
Adaptor Model : powersupply1
Supplier : Sagem

Conducted Emission Measurement

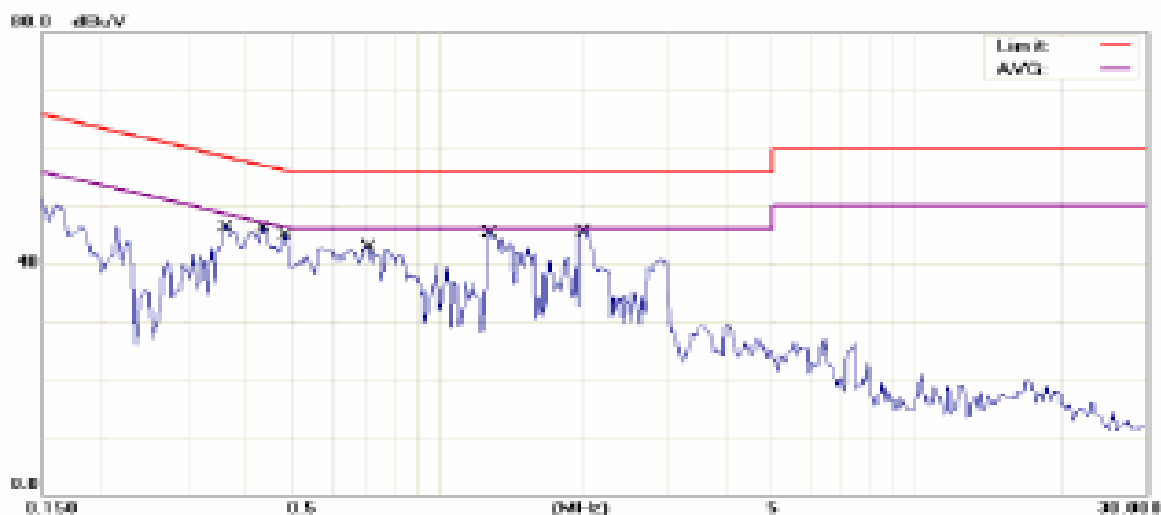

Site: SGS CONDUCTED #1
Limit: CISPR22 Class B Conduction(QP)
EUT: GSM850/1900 mobile phone
M/N: A2005sa
Note: GSM850 LINK (Adaptor: powersupply1 with 18.867 925-5)

Phase: L1
Power: AC 120W/50Hz

Temperature: 23 °C
Humidity: 57 %
Air Pressure: 1013

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.3650	42.04	0.61	42.65	58.61	-15.96	QP	
2		0.3650	32.76	0.61	33.37	48.61	-15.24	AVG	
3		0.4350	42.36	0.61	42.97	57.16	-14.19	QP	
4		0.4350	33.37	0.61	33.98	47.16	-13.18	AVG	
5		0.4850	40.55	0.61	41.16	56.25	-15.09	QP	
6		0.4850	30.21	0.61	30.82	46.25	-15.43	AVG	
7		0.7100	42.55	0.61	43.16	56.00	-12.84	QP	
8	*	0.7100	35.99	0.61	36.60	46.00	-9.40	AVG	
9		1.2700	22.34	0.63	22.97	56.00	-33.03	QP	
10		1.2700	31.80	0.63	32.43	46.00	-13.57	AVG	
11		2.0050	45.91	0.65	46.56	56.00	-9.44	QP	
12		2.0050	34.06	0.65	34.71	46.00	-11.29	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM 850
Fundamental Frequency : N/A
Temperature : 23°C
Humidity : 57%
Test Voltage : 120Vac

Test Date : Dec.20, 2005
Test By : Sky
Pol : Neutral
Adaptor Model : powersupply1
Supplier : Sagem

Conducted Emission Measurement



Site: SGS CONDUCTED #1 Phase: **N** Temperature: 23 °C
Limit: CISPR22:Class B Conduction(QP) Power: AC 120V/60Hz Humidity: 57 %
EUT: GSM850/1900 mobile phone Air Pressure: hpa
MN: A2005ss
Note: GSM850 LINK (Adaptor: powersupply1 with 18 867 925-5)

No.	Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBu/V	dB	dBu/V	dBu/V	dB		
1		0.2100	46.58	0.60	47.18	63.21	-16.03	QP	
2		0.2100	35.05	0.60	35.65	53.21	-17.56	AVG	
3		0.3500	48.18	0.60	48.78	58.96	-10.18	QP	
4		0.3500	36.71	0.60	37.31	48.96	-11.65	AVG	
5		0.4050	40.36	0.61	40.97	57.75	-16.78	QP	
6		0.4050	30.68	0.61	31.29	47.75	-16.46	AVG	
7		1.1450	45.38	0.62	46.00	56.00	-10.00	QP	
8		1.1450	31.02	0.62	31.64	46.00	-14.36	AVG	
9		1.5050	43.23	0.64	43.87	56.00	-12.13	QP	
10		1.5050	28.48	0.64	29.12	46.00	-16.88	AVG	
11	*	1.7150	50.49	0.64	51.13	56.00	-4.87	QP	
12		1.7150	39.57	0.64	40.21	46.00	-5.79	AVG	


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM1900
Fundamental Frequency : N/A
Temperature : 23°C
Humidity : 57%
Test Voltage : 120Vac

Test Date : Dec.20, 2005
Test By : Sky
Pol : Line
Adaptor Model : powersupply1
Supplier : Sagem

Conducted Emission Measurement

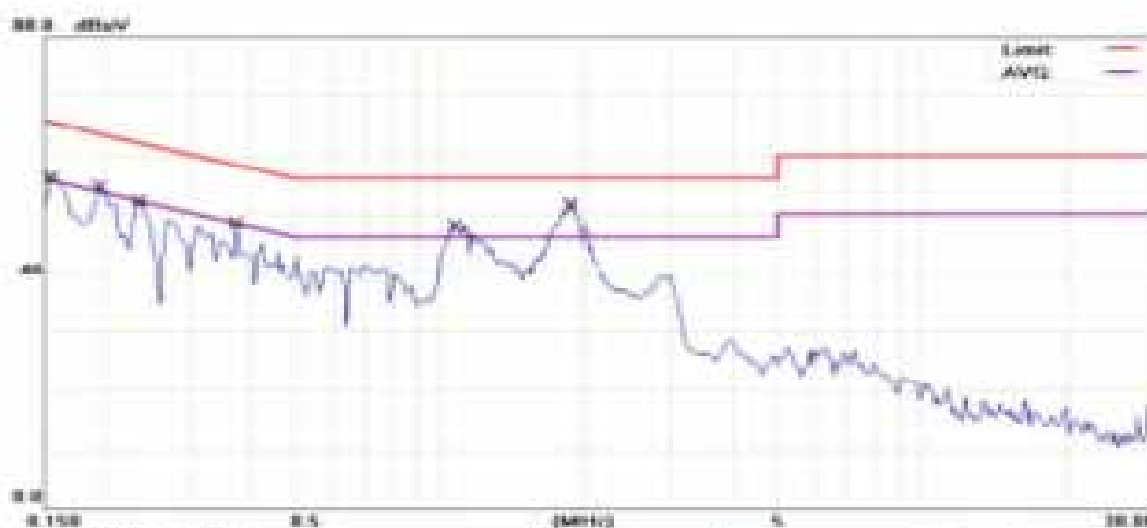

See SGS CONDUCTED #1

Limit: CISPR22 Class B Conduction(QP)

EUT: GSM850/1900 mobile phone

M/N: A2005aa

Note: GSM1900 LINK (Adaptor: powersupply1 with 18 867 925-5)

Phase: L1

Power: AC 120V/60Hz

Distance:

Temperature: 23°C

Humidity: 57%

At Pressure: 1g

No.	Mk.	Freq.	Reading	Factor	Measure-	Limit	Over		
		MHz	dBμV	dB	ment	dBμV	dB	Detected	Comments
1		0.1550	49.43	0.60	50.03	55.73	-15.70	QP	
2		0.1550	30.15	0.60	30.75	55.73	-24.98	AVG	
3		0.1650	48.27	0.60	48.87	53.82	-14.95	QP	
4		0.1650	29.70	0.60	30.30	53.82	-23.52	AVG	
5		0.2350	45.78	0.60	46.38	52.27	-15.89	QP	
6		0.2350	31.97	0.60	32.57	52.27	-19.70	AVG	
7		0.3750	38.48	0.61	39.10	56.39	-18.29	QP	
8		0.3750	22.58	0.61	23.19	48.39	-25.20	AVG	
9		1.0800	41.76	0.62	42.40	56.00	-13.60	QP	
10		1.0800	25.75	0.62	26.37	46.00	-19.63	AVG	
11	*	1.8800	44.60	0.65	45.25	56.00	-10.75	QP	
12		1.8800	26.80	0.65	27.45	46.00	-18.55	AVG	


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM1900
Fundamental Frequency : N/A
Temperature : 23°C
Humidity : 57%
Test Voltage : 120Vac

Test Date : Dec.20, 2005
Test By : Sky
Pol : Neutral
Adaptor Model : powersupply1
Supplier : Sagem

Conducted Emission Measurement

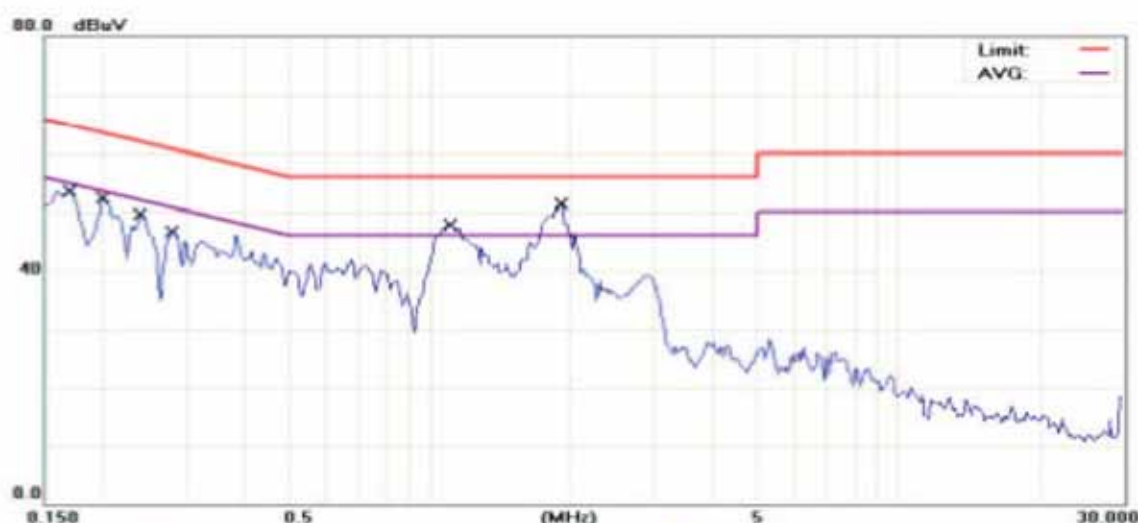

Site: SGS CONDUCTED #1

Limit: CISPR22 Class B Conduction(QP)

EUT: GSM850/1900 mobile phone

M/N: A2005sa

Note: GSM1900 LINK (Adapter: powersupply1 with 18 867 925-5)

Phase: N

Power: AC 120V/60Hz

Distance:

Temperature: 23 °C

Humidity: 57 %

Air Pressure: hpa

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1700	46.93	0.60	47.53	64.96	-17.43	QP	
2		0.1700	31.22	0.60	31.82	54.96	-23.14	AVG	
3		0.2000	48.39	0.60	48.99	63.61	-14.62	QP	
4		0.2000	28.66	0.60	29.26	53.61	-24.35	AVG	
5		0.2400	45.76	0.60	46.36	62.10	-15.74	QP	
6		0.2400	34.70	0.60	35.30	52.10	-16.80	AVG	
7		0.2800	43.10	0.60	43.70	60.82	-17.12	QP	
8		0.2800	27.39	0.60	27.99	50.82	-22.83	AVG	
9		1.1100	43.71	0.62	44.33	56.00	-11.67	QP	
10		1.1100	27.46	0.62	28.08	46.00	-17.92	AVG	
11	*	1.9050	44.55	0.65	45.20	56.00	-10.80	QP	
12		1.9050	26.52	0.65	27.17	46.00	-18.83	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM850
Fundamental Frequency : N/A
Temperature : 23°C
Humidity : 57%
Test Voltage : 120Vac

Test Date : Dec.20, 2005
Test By : Sky
Pol : Line
Adaptor Model : powersupply2
Supplier : Sagem

Conducted Emission Measurement



Site: SGS CONDUCTED #1

Phase: L1

Temperature: 23 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120V/50Hz

Humidity: 57 %

EUT: GSM850/1900 mobile phone

Air Pressure: hpa

M/N: A2005sa

Note: GSM850 LINK (Adaptor: powersupply2 with 18.885 855-8)

No.	Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1850	40.83	0.60	41.43	64.26	-22.83	QP	
2		0.1850	32.37	0.60	32.97	54.26	-21.29	AVG	
3		0.2300	48.36	0.60	48.96	62.45	-13.49	QP	
4		0.2300	30.55	0.60	31.15	52.45	-21.30	AVG	
5		0.2800	45.28	0.60	45.88	60.82	-14.94	QP	
6		0.2800	27.37	0.60	27.97	50.82	-22.85	AVG	
7		0.3250	42.16	0.60	42.76	59.58	-16.82	QP	
8		0.3250	27.73	0.60	28.33	49.58	-21.25	AVG	
9		1.1600	38.79	0.62	39.41	55.00	-16.59	QP	
10		1.1600	22.01	0.62	22.63	45.00	-23.37	AVG	
11	*	1.7850	46.14	0.64	46.78	55.00	-9.22	QP	
12		1.7850	29.17	0.64	29.81	45.00	-16.19	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Taiwan Ltd.

No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台北縣五股工業區五工路134號

台灣檢驗科技股份有限公司

t (886-2) 2299-3939 f (886-2) 2298-2698 www.sgs.com.tw

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM850
Fundamental Frequency : N/A
Temperature : 23°C
Humidity : 57%
Test Voltage : 120Vac

Test Date : Dec.20, 2005
Test By : Sky
Pol : Neutral
Adaptor Model : powersupply2
Supplier : Sagem

Conducted Emission Measurement



Site: SGS CONDUCTED #1

Phase: N

Temperature: 23 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120W@50Hz

Humidity: 57 %

EUT: GSM850/1900 mobile phone

Air Pressure: kpa

MIN: A2005sa

Note: GSM850 LINK (Adaptor: powersupply2 with 18 885 855-8)

No.	Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1850	45.99	0.60	46.59	64.26	-17.67	QP	
2		0.1850	35.18	0.60	36.78	54.26	-17.48	AVG	
3		0.2350	48.66	0.60	49.26	62.27	-13.01	QP	
4		0.2350	31.20	0.60	31.80	52.27	-20.47	AVG	
5		0.2800	44.65	0.60	45.25	60.82	-15.57	QP	
6		0.2800	28.27	0.60	28.87	50.82	-21.95	AVG	
7		0.4050	40.99	0.61	41.60	57.75	-16.15	QP	
8		0.4050	25.87	0.61	27.48	47.75	-20.27	AVG	
9		1.0650	41.18	0.62	41.80	55.00	-14.20	QP	
10		1.0650	28.46	0.62	29.08	45.00	-16.92	AVG	
11	*	1.7400	50.87	0.64	51.51	55.00	-4.49	QP	
12		1.7400	38.24	0.64	38.88	45.00	-7.12	AVG	


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM 1900
Fundamental Frequency : N/A
Temperature : 23°C
Humidity : 57%
Test Voltage : 120Vac

Test Date : Dec.20, 2005
Test By : Sky
Pol : Line
Adaptor Model : powersupply2
Supplier : Sagem

Conducted Emission Measurement

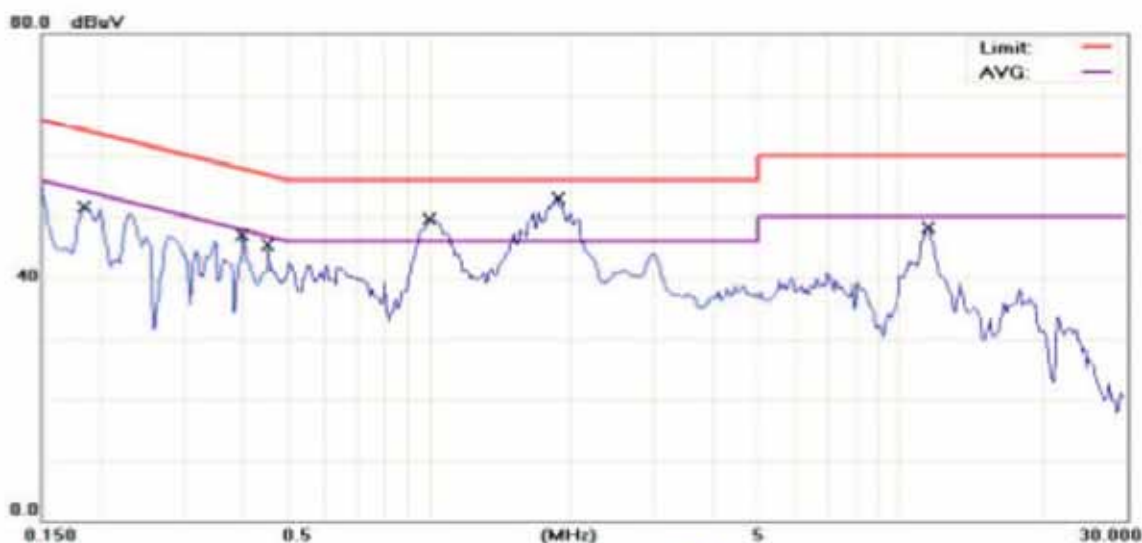

Site SGS CONDUCTED #1

Limit: CISPR22 Class B Conduction(QP)

EUT: GSM850/1900 mobile phone

M/N: A2005sa

Note: GSM1900 LINK (Adapter: powersupply2 with 18 865 855-8)

Phase: L1

Power: AC 120V/60Hz

Distance:

Temperature: 23°C

Humidity: 57 %

Air Pressure: hpa

No.	Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1850	47.39	0.60	47.99	64.26	-16.27	QP	
2		0.1850	28.75	0.60	29.35	54.26	-24.91	AVG	
3		0.4000	39.11	0.61	39.72	57.85	-18.13	QP	
4		0.4000	21.74	0.61	22.35	47.85	-25.50	AVG	
5		0.4550	39.34	0.61	39.95	56.78	-16.83	QP	
6		0.4550	24.93	0.61	25.54	46.78	-21.24	AVG	
7		1.0000	44.65	0.62	45.27	56.00	-10.73	QP	
8		1.0000	26.47	0.62	27.09	46.00	-18.91	AVG	
9	*	1.8700	46.69	0.65	47.34	56.00	-8.66	QP	
10		1.8700	25.46	0.65	26.11	46.00	-19.89	AVG	
11		11.5500	40.36	0.95	41.31	60.00	-18.69	QP	
12		11.5500	29.85	0.95	30.80	50.00	-19.20	AVG	


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM 1900
Fundamental Frequency : N/A
Temperature : 23°C
Humidity : 57%
Test Voltage : 120Vac

Test Date : Dec.20, 2005
Test By : Sky
Pol : Neutral
Adaptor Model : powersupply2
Supplier : Sagem

Conducted Emission Measurement

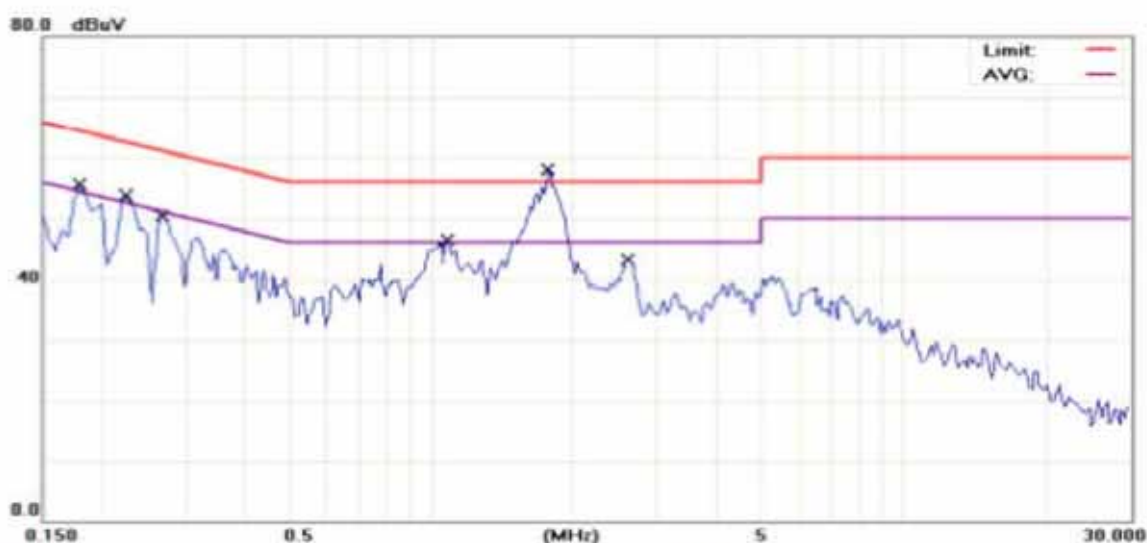

Site SGS CONDUCTED #1

Limit: CISPR22 Class B Conduction(QP)

EUT: GSM850/1900 mobile phone

M/N: A2005sa

Note: GSM1900 LINK (Adapter: powersupply2 with 18 865 855-8)

Phase: N

Power: AC 120V/60Hz

Distance:

Temperature: 23°C

Humidity: 57 %

Air Pressure: hpa

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1800	48.45	0.60	49.05	64.49	-15.44	QP	
2		0.1800	30.07	0.60	30.67	54.49	-23.82	AVG	
3		0.2250	46.35	0.60	46.95	62.63	-15.68	QP	
4		0.2250	27.03	0.60	27.63	52.63	-25.00	AVG	
5		0.2700	42.44	0.60	43.04	61.12	-18.08	QP	
6		0.2700	23.03	0.60	23.63	51.12	-27.49	AVG	
7		1.0800	39.30	0.62	39.92	56.00	-16.08	QP	
8		1.0800	21.86	0.62	22.48	46.00	-23.52	AVG	
9	*	1.7700	50.28	0.64	50.92	56.00	-5.08	QP	
10		1.7700	27.26	0.64	27.90	46.00	-18.10	AVG	
11		2.6200	38.94	0.67	39.61	56.00	-16.39	QP	
12		2.6200	20.34	0.67	21.01	46.00	-24.99	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM 850
Fundamental Frequency : N/A
Temperature : 23°C
Humidity : 57%
Test Voltage : 120Vac

Test Date : Dec.20, 2005
Test By : Sky
Pol : Line
Adaptor Model : powersupply3
Supplier : Sagem

Conducted Emission Measurement



Site: SGS CONDUCTED #1

Phase: L1

Temperature: 23 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120W@50Hz

Humidity: 57 %

EUT: GSM850/1900 mobile phone

Air Pressure: kpa

M/N: A2005sa

Note: GSM850 LINK (Adaptor: powersupply3 with 18 885 853-7)

No.	Mk.	Freq.	Reading	Factor	Measure-	Limit	Over		
		MHz	Level		ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.2400	52.69	0.60	53.29	62.10	-8.81	QP	
2		0.2400	24.55	0.60	25.15	52.10	-26.95	AVG	
3		0.2650	50.01	0.60	50.61	61.27	-10.66	QP	
4		0.2650	28.37	0.60	28.97	51.27	-22.30	AVG	
5		0.3850	47.10	0.61	47.71	58.17	-10.46	QP	
6		0.3850	25.98	0.61	26.59	48.17	-21.58	AVG	
7		0.4300	43.19	0.61	43.80	57.25	-13.45	QP	
8		0.4300	20.34	0.61	20.95	47.25	-26.30	AVG	
9		0.4800	50.21	0.61	50.82	56.34	-5.52	QP	
10		0.4800	24.77	0.61	25.38	46.34	-20.96	AVG	
11	*	1.8250	50.53	0.64	51.17	56.00	-4.83	QP	
12		1.8250	33.07	0.64	33.71	46.00	-12.29	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Taiwan Ltd.

No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台北縣五股工業區五工路134號


台灣檢驗科技股份有限公司

t (886-2) 2299-3939 f (886-2) 2298-2698 www.sgs.com.tw

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM 850
Fundamental Frequency : N/A
Temperature : 23°C
Humidity : 57%
Test Voltage : 120Vac

Test Date : Dec.20, 2005
Test By : Sky
Pol : Neutral
Adaptor Model : powersupply3
Supplier : Sagem

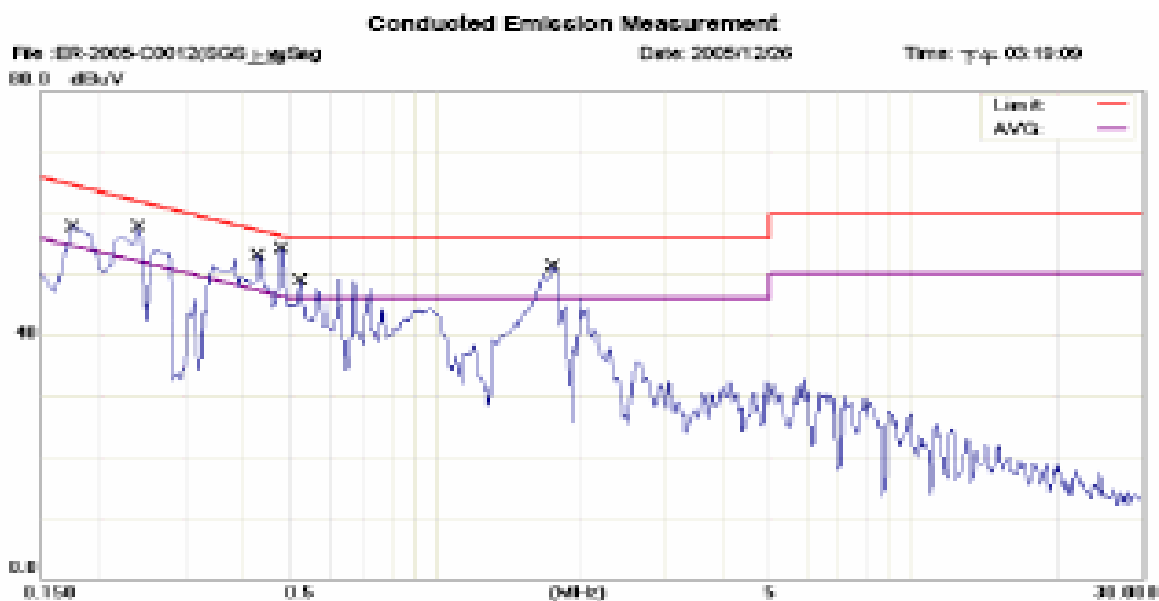

Site: SGS CONDUCTED #1 Phase: **N** Temperature: 23 °C
Limit: CISPR22 Class B Conduction(QP) Power: AC 120V60Hz Humidity: 57 %
EUT: GSM850/1900 mobile phone Air Pressure: 1013
M/N: A2005sa
Note: GSM850 LINK (Adaptor: powersupply3 with 18 865 853-7)

No.	Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1750	52.62	0.60	53.22	54.72	-11.50	QP	
2		0.1750	22.63	0.60	23.23	54.72	-31.49	AVG	
3		0.2400	41.88	0.60	42.48	52.10	-19.62	QP	
4		0.2400	39.61	0.60	40.21	52.10	-11.89	AVG	
5		0.4300	47.52	0.61	48.13	57.25	-9.12	QP	
6		0.4300	32.57	0.61	33.18	57.25	-14.07	AVG	
7	*	0.4800	46.87	0.61	47.48	56.34	-8.86	QP	
8		0.4800	27.13	0.61	27.74	56.34	-18.60	AVG	
9		0.5250	42.63	0.61	43.24	56.00	-12.76	QP	
10		0.5250	26.21	0.61	26.82	56.00	-19.18	AVG	
11		1.7450	42.80	0.64	43.44	56.00	-12.56	QP	
12		1.7450	25.06	0.64	25.70	56.00	-20.30	AVG	


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM1900
Fundamental Frequency : N/A
Temperature : 23°C
Humidity : 57%
Test Voltage : 120Vac

Test Date : Dec.20, 2005
Test By : Sky
Pol : Line
Adaptor Model : powersupply3
Supplier : Sagem

Conducted Emission Measurement

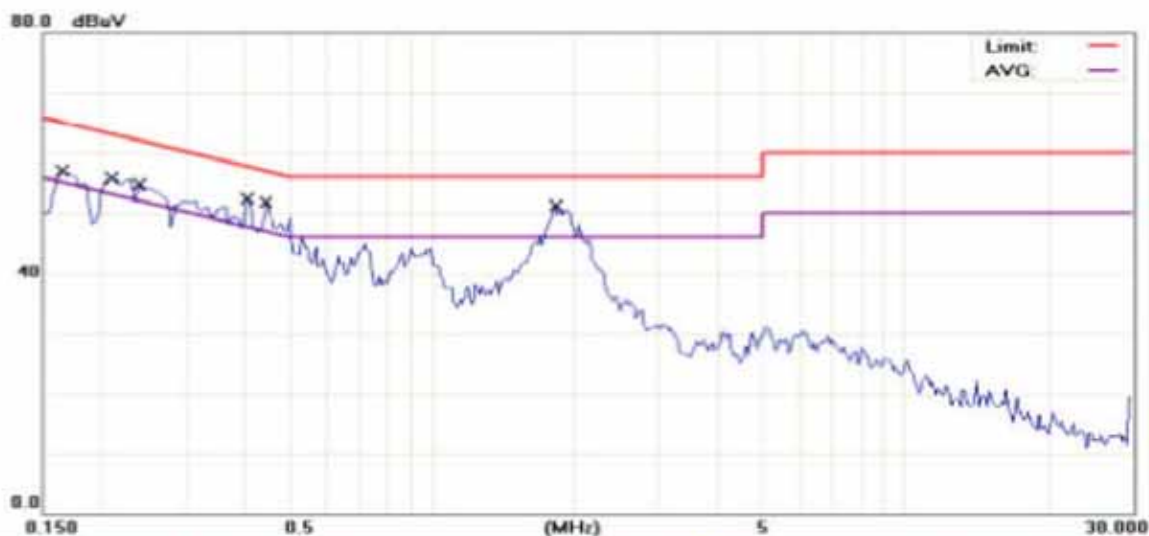

Site SGS CONDUCTED #1

Limit: CISPR22 Class B Conduction(QP)

EUT: GSM850/1900 mobile phone

M/N: A2005sa

Note: GSM1900 LINK (Adapter: powersupply3 with 18 865 853-7)

Phase: L1

Power: AC 120V/60Hz

Distance:

Temperature: 23°C

Humidity: 57%

Air Pressure: hpa

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1650	52.44	0.60	53.04	65.21	-12.17	QP	
2		0.1650	31.71	0.60	32.31	55.21	-22.90	AVG	
3	*	0.2100	52.21	0.60	52.81	63.21	-10.40	QP	
4		0.2100	31.70	0.60	32.30	53.21	-20.91	AVG	
5		0.2400	44.28	0.60	44.88	62.10	-17.22	QP	
6		0.2400	20.84	0.60	21.44	52.10	-30.66	AVG	
7		0.4050	45.25	0.61	45.86	57.75	-11.89	QP	
8		0.4050	24.70	0.61	25.31	47.75	-22.44	AVG	
9		0.4450	42.82	0.61	43.43	56.97	-13.54	QP	
10		0.4450	24.68	0.61	25.29	46.97	-21.68	AVG	
11		1.8250	42.45	0.64	43.09	56.00	-12.91	QP	
12		1.8250	20.81	0.64	21.45	46.00	-24.55	AVG	


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM1900
Fundamental Frequency : N/A
Temperature : 23°C
Humidity : 57%
Test Voltage : 120Vac

Test Date : Dec.20, 2005
Test By : Sky
Pol : Neutral
Adaptor Model : powersupply3
Supplier : Sagem

Conducted Emission Measurement

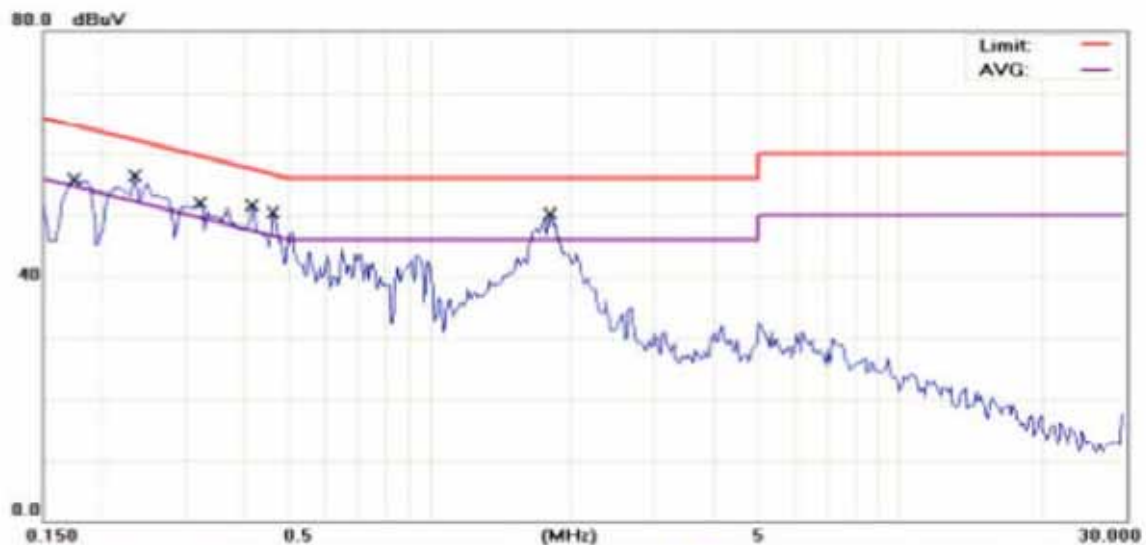

Site SGS CONDUCTED #1

Limit: CISPR22 Class B Conduction(QP)

EUT: GSM850/1900 mobile phone

M/N: A2005sa

Note: GSM1900 LINK (Adapter: powersupply3 with 18 865 853-7)

Phase: N

Power: AC 120V/60Hz

Distance:

Temperature: 23 °C

Humidity: 57 %

Air Pressure: hpa

No.	Mk.	Freq.	Reading Level	Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1750	52.38	0.60	52.98	64.72	-11.74	QP	
2		0.1750	34.99	0.60	35.59	54.72	-19.13	AVG	
3		0.2350	51.03	0.60	51.63	62.27	-10.64	QP	
4		0.2350	33.49	0.60	34.09	52.27	-18.18	AVG	
5	*	0.3250	49.07	0.60	49.67	59.58	-9.91	QP	
6		0.3250	33.14	0.60	33.74	49.58	-15.84	AVG	
7		0.4150	45.82	0.61	46.43	57.55	-11.12	QP	
8		0.4150	28.76	0.61	29.37	47.55	-18.18	AVG	
9		0.4650	45.48	0.61	46.09	56.60	-10.51	QP	
10		0.4650	31.01	0.61	31.62	46.60	-14.98	AVG	
11		1.7950	43.00	0.64	43.64	56.00	-12.36	QP	
12		1.7950	20.06	0.64	20.70	46.00	-25.30	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM 850
 Fundamental Frequency : N/A
 Temperature : 23°C
 Humidity : 57%
 Test Voltage : 120Vac

Test Date : Dec.20, 2005
 Test By : Sky
 Pol : Line
 Adaptor Model : powersupply4
 Supplier : Sagem

Conducted Emission Measurement



Site: SGS CONDUCTED #1

Phase: L1

Temperature: 23 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 57 %

EUT: GSM850/1900 mobile phone

Distance:

Air Pressure: hpa

MNF: A2005sa

Note: GSM850 LINK (Adapter: powersupply4 with 18-864-404-6)

No.	Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1800	48.09	0.60	48.69	54.49	-15.80	QP	
2		0.1800	29.74	0.60	30.34	54.49	-24.15	AVG	
3		0.9250	40.41	0.62	41.03	56.00	-14.97	QP	
4		0.9250	25.36	0.62	25.98	56.00	-30.02	AVG	
5		1.2850	40.46	0.63	41.09	56.00	-14.91	QP	
6		1.2850	21.89	0.63	22.52	56.00	-33.48	AVG	
7		1.4800	41.78	0.63	42.41	56.00	-13.59	QP	
8		1.4800	24.54	0.63	25.17	56.00	-30.83	AVG	
9		1.6100	43.58	0.64	44.22	56.00	-11.78	QP	
10		1.6100	23.68	0.64	24.32	56.00	-31.68	AVG	
11	*	1.8850	50.69	0.65	51.34	56.00	-4.66	QP	
12		1.8850	28.71	0.65	29.36	56.00	-26.64	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM 850
Fundamental Frequency : N/A
Temperature : 23°C
Humidity : 57%
Test Voltage : 120Vac

Test Date : Dec.20, 2005
Test By : Sky
Pol : Neutral
Adaptor Model : powersupply4
Supplier : Sagem

Conducted Emission Measurement



Site: SGS CONDUCTED #1

Phase: N

Temperature: 23 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120W@50Hz

Humidity: 57 %

EUT: GSM850/1900 mobile phone

Air Pressure: hpa

M/N: A2005sa

Note: GSM850 LINK (Adaptor: powersupply4 with 18 864 404-6)

No.	Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1800	47.13	0.60	47.73	64.49	-16.76	QP	
2		0.1800	32.29	0.60	32.89	54.49	-21.60	AVG	
3		0.2250	43.73	0.60	44.33	62.63	-18.30	QP	
4		0.2250	30.20	0.60	30.80	52.63	-21.83	AVG	
5		0.9400	44.35	0.62	44.97	56.00	-11.03	QP	
6		0.9400	25.54	0.62	27.16	46.00	-18.84	AVG	
7		1.2850	42.87	0.63	43.50	56.00	-12.50	QP	
8		1.2850	23.84	0.63	24.47	46.00	-21.53	AVG	
9		1.5600	44.67	0.64	45.31	56.00	-10.69	QP	
10		1.5600	25.46	0.64	26.10	46.00	-19.90	AVG	
11	*	1.7750	49.14	0.64	49.78	56.00	-6.22	QP	
12		1.7750	30.07	0.64	30.71	46.00	-15.29	AVG	


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM 1900
Fundamental Frequency : N/A
Temperature : 23°C
Humidity : 57%
Test Voltage : 120Vac

Test Date : Dec.20, 2005
Test By : Sky
Pol : Line
Adaptor Model : powersupply4
Supplier : Sagem

Conducted Emission Measurement

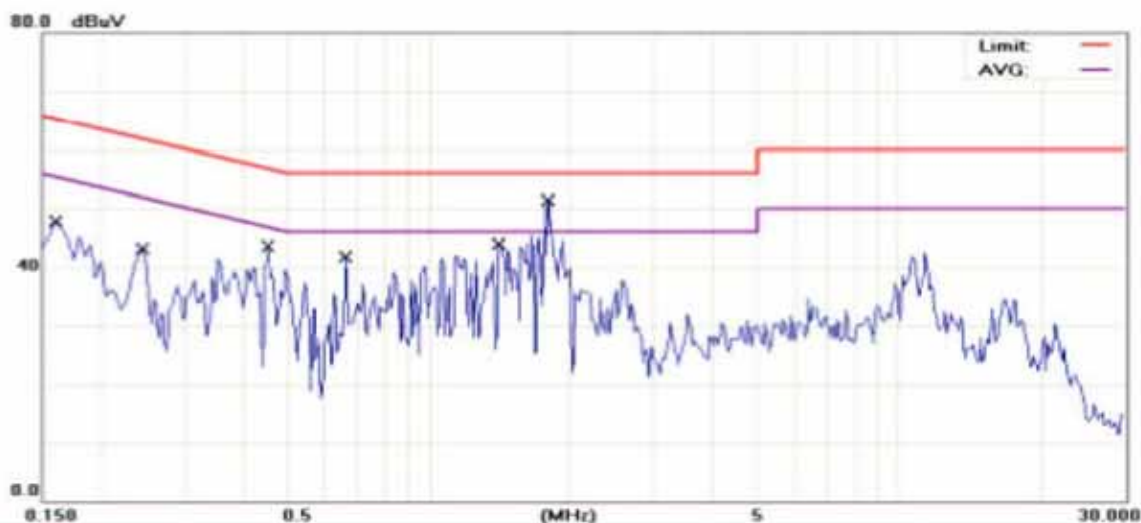

Site: SGS CONDUCTED #1
Limit: CISPR22 Class B Conduction(QP)
EUT: GSM850/1900 mobile phone
M/N: A2005sa
Note: GSM1900 LINK (Adapter: powersupply4 with 18 864 404-6)

Phase: L1
Power: AC 120V/60Hz
Distance:
Temperature: 23 °C
Humidity: 57 %
Air Pressure: hpa

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1600	38.09	0.60	38.69	65.46	-26.77	QP	
2		0.1600	25.25	0.60	25.85	55.46	-29.61	AVG	
3		0.2450	34.21	0.60	34.81	61.92	-27.11	QP	
4		0.2450	12.71	0.60	13.31	51.92	-38.61	AVG	
5		0.4550	32.87	0.61	33.48	56.78	-23.30	QP	
6		0.4550	28.14	0.61	28.75	46.78	-18.03	AVG	
7		0.6650	33.28	0.61	33.89	56.00	-22.11	QP	
8		0.6650	28.19	0.61	28.80	46.00	-17.20	AVG	
9		1.4100	36.90	0.63	37.53	56.00	-18.47	QP	
10	*	1.4100	28.76	0.63	29.39	46.00	-16.61	AVG	
11		1.7900	34.99	0.64	35.63	56.00	-20.37	QP	
12		1.7900	21.52	0.64	22.16	46.00	-23.84	AVG	


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM 1900
Fundamental Frequency : N/A
Temperature : 23°C
Humidity : 57%
Test Voltage : 120Vac

Test Date : Dec.20, 2005
Test By : Sky
Pol : Neutral
Adaptor Model : powersupply4
Supplier : Sagem

Conducted Emission Measurement

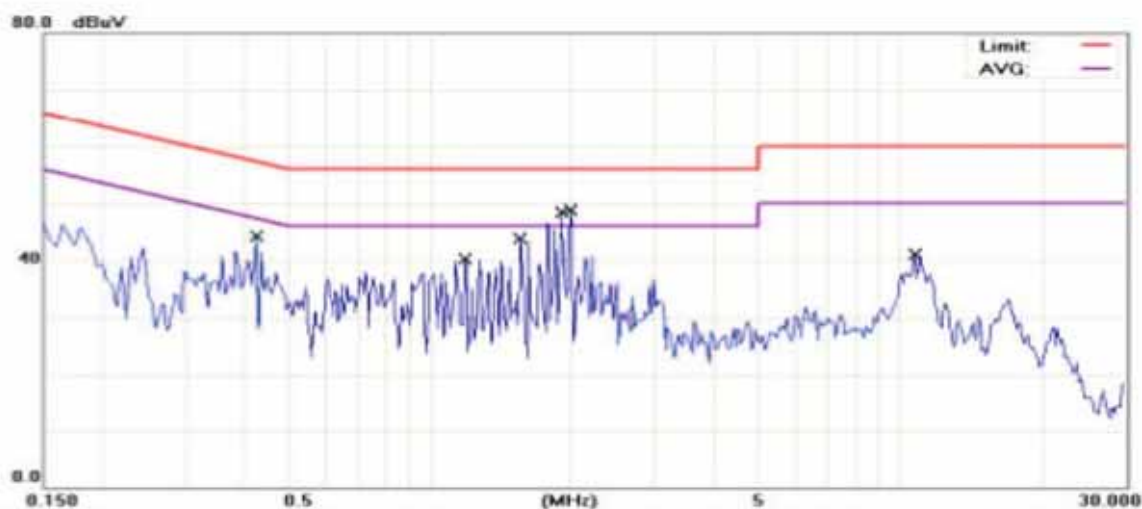

Site SGS CONDUCTED #1

Limit: CISPR22 Class B Conduction(QP)

EUT: GSM850/1900 mobile phone

M/N: A2005sa

Note: GSM1900 LINK (Adapter: powersupply4 with 18 864 404-6)

Phase: N

Power: AC 120V/60Hz

Distance:

Temperature: 23 °C

Humidity: 57 %

Air Pressure: hpa

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.4250	32.92	0.61	33.53	57.35	-23.82	QP	
2		0.4250	20.22	0.61	20.83	47.35	-26.52	AVG	
3		1.1900	25.26	0.63	25.89	56.00	-30.11	QP	
4		1.1900	21.82	0.63	22.45	46.00	-23.55	AVG	
5		1.5550	26.98	0.64	27.62	56.00	-28.38	QP	
6		1.5550	19.72	0.64	20.36	46.00	-25.64	AVG	
7	*	1.9050	34.14	0.65	34.79	56.00	-21.21	QP	
8		1.9050	20.15	0.65	20.80	46.00	-25.20	AVG	
9		1.9850	32.56	0.65	33.21	56.00	-22.79	QP	
10		1.9850	21.04	0.65	21.69	46.00	-24.31	AVG	
11		10.8000	27.88	0.96	28.84	60.00	-31.16	QP	
12		10.8000	12.23	0.96	13.19	50.00	-36.81	AVG	


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM 850
 Fundamental Frequency : N/A
 Temperature : 23°C
 Humidity : 57%
 Test Voltage : 120Vac

Test Date : Dec.20, 2005
 Test By : Sky
 Pol : Line
 Adaptor Model : powersupply5
 Supplier : Sagem

Conducted Emission Measurement

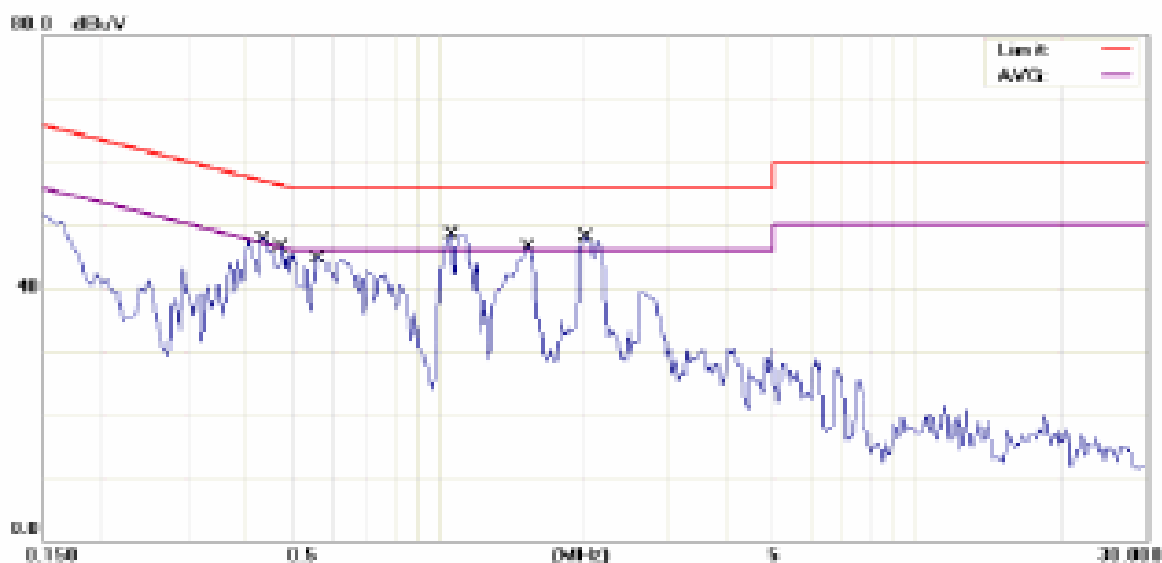

Site: SGS CONDUCTED #1

Phase: L1

Temperature: 23 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120V60Hz

Humidity: 57 %

EUT: GSM850/1900 mobile phone

Air Pressure: hpa

M/N: A2005aa

Note: GSM850 LINK (Adaptor : powersupply5 with 18 889 2000)

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.4350	41.58	0.61	42.19	57.16	-14.97	QP	
2		0.4350	27.69	0.61	28.30	47.16	-18.86	AVG	
3	*	0.4750	45.82	0.61	46.43	55.43	-10.00	QP	
4		0.4750	32.27	0.61	32.88	45.43	-13.55	AVG	
5		0.5650	41.40	0.61	42.01	55.00	-13.99	QP	
6		0.5650	30.75	0.61	31.36	45.00	-14.64	AVG	
7		1.0550	42.57	0.62	43.19	55.00	-12.81	QP	
8		1.0550	28.19	0.62	28.81	45.00	-17.19	AVG	
9		1.5300	41.53	0.64	42.17	55.00	-13.83	QP	
10		1.5300	30.66	0.64	31.30	45.00	-14.70	AVG	
11		2.0150	42.84	0.65	43.49	55.00	-12.51	QP	
12		2.0150	35.23	0.65	35.88	45.00	-10.12	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM 850
 Fundamental Frequency : N/A
 Temperature : 23°C
 Humidity : 57%
 Test Voltage : 120Vac

Test Date : Dec.20, 2005
 Test By : Sky
 Pol : Neutral
 Adaptor Model : powersupply5
 Supplier : Sagem

Conducted Emission Measurement



Site: SGS CONDUCTED #1

Phase: *N*

Temperature: 23 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120V/50Hz

Humidity: 57 %

EUT: GSM850/1900 mobile phone

Air Pressure: 1013

M/N: A2005sa

Note: GSM850 LINK (Adaptor : powersupply5 with 18 880 2000)

No.	Mk.	Freq. MHz	Reading Level dBu/V	Factor dB	Measure- ment dBu/V	Limit dBu/V	Over dB	Detector	Comment
1		0.3500	42.04	0.60	42.64	58.96	-16.32	QP	
2		0.3500	28.77	0.60	29.37	48.96	-19.59	AVG	
3		0.3850	41.71	0.61	42.32	58.17	-15.85	QP	
4		0.3850	25.44	0.61	26.05	48.17	-22.12	AVG	
5		0.4350	41.94	0.61	42.55	57.16	-14.61	QP	
6		0.4350	27.50	0.61	28.11	47.16	-19.05	AVG	
7		0.4900	39.84	0.61	40.45	56.17	-15.72	QP	
8		0.4900	26.87	0.61	27.48	46.17	-18.69	AVG	
9	"	1.7500	48.03	0.64	48.67	56.00	-7.33	QP	
10		1.7500	31.15	0.64	31.79	46.00	-14.21	AVG	
11		2.6500	39.73	0.67	40.40	56.00	-15.60	QP	
12		2.6500	24.57	0.67	25.24	46.00	-20.76	AVG	


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM1900
Fundamental Frequency : N/A
Temperature : 23°C
Humidity : 57%
Test Voltage : 120Vac

Test Date : Dec.20, 2005
Test By : Sky
Pol : Line
Adaptor Model : powersupply5
Supplier : Sagem

Conducted Emission Measurement

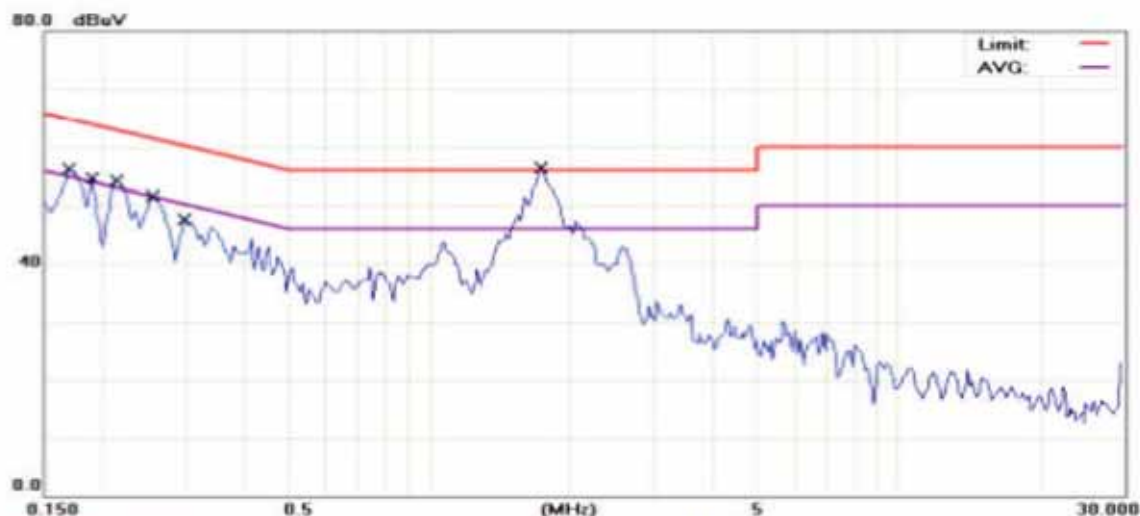

Site: SGS CONDUCTED #1
Limit: CISPR22 Class B Conduction(QP)
EUT: GSM850/1900 mobile phone
M/N: A2005sa
Note: GSM1900 LINK (Adapter: powersupply5 with 18 869 2000)

Phase: L1
Power: AC 120V/60Hz
Distance:
Temperature: 23 °C
Humidity: 57 %
Air Pressure: hpa


No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1700	50.75	0.60	51.35	64.96	-13.61	QP	
2		0.1700	31.35	0.60	31.95	54.96	-23.01	AVG	
3		0.1900	45.13	0.60	45.73	64.04	-18.31	QP	
4		0.1900	28.01	0.60	28.61	54.04	-25.43	AVG	
5		0.2150	49.76	0.60	50.36	63.01	-12.65	QP	
6		0.2150	28.49	0.60	29.09	53.01	-23.92	AVG	
7		0.2550	46.14	0.60	46.74	61.59	-14.85	QP	
8		0.2550	28.64	0.60	29.24	51.59	-22.35	AVG	
9		0.3000	43.17	0.60	43.77	60.24	-16.47	QP	
10		0.3000	21.30	0.60	21.90	50.24	-28.34	AVG	
11	*	1.7300	49.03	0.64	49.67	56.00	-6.33	QP	
12		1.7300	28.58	0.64	29.22	46.00	-16.78	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM1900
Fundamental Frequency : N/A
Temperature : 23°C
Humidity : 57%
Test Voltage : 120Vac

Test Date : Dec.20, 2005
Test By : Sky
Pol : Neutral
Adaptor Model : powersupply5
Supplier : Sagem

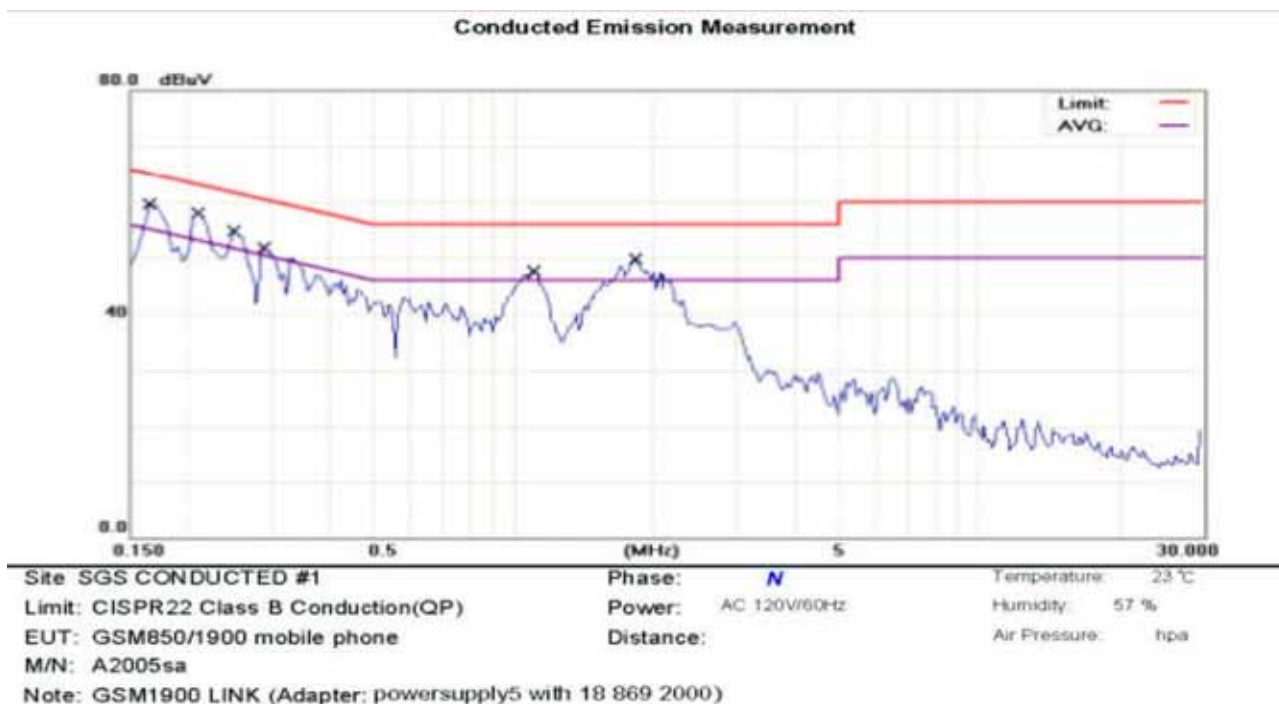

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1650	52.16	0.60	52.76	65.21	-12.45	QP	
2		0.1650	32.16	0.60	32.76	55.21	-22.45	AVG	
3	*	0.2100	52.55	0.60	53.15	63.21	-10.06	QP	
4		0.2100	29.85	0.60	30.45	53.21	-22.76	AVG	
5		0.2500	48.77	0.60	49.37	61.76	-12.39	QP	
6		0.2500	35.63	0.60	36.23	51.76	-15.53	AVG	
7		0.2900	41.99	0.60	42.59	60.52	-17.93	QP	
8		0.2900	22.95	0.60	23.55	50.52	-26.97	AVG	
9		1.1050	43.25	0.62	43.87	56.00	-12.13	QP	
10		1.1050	27.79	0.62	28.41	46.00	-17.59	AVG	
11		1.8200	42.39	0.64	43.03	56.00	-12.97	QP	
12		1.8200	23.78	0.64	24.42	46.00	-21.58	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM 850
Fundamental Frequency : N/A
Temperature : 23°C
Humidity : 57%
Test Voltage : 120Vac

Test Date : Feb.08, 2006
Test By : Sky
Pol : Line
Adaptor Model : powersupply6
Supplier : Sagem

Conducted Emission Measurement



Site: SGS CONDUCTED #1
Limit: CISPR22 Class B Conduction(QP)
EUT: GSM850/1900 MOBIL PHONE
M/N: A2005sa

Phase: L1
Power: AC 120V/60Hz
Distance:

Temperature: 23 °C
Humidity: 57 %
Air Pressure: hpa

Note: GSM850 LINK (Adapter : powersupply6 with 18 Q10 715-4)

No.	Mk.	Freq.	Reading	Factor	Measure-	Limit	Over	Detector	Comment
		MHz	dBuV		ment	dBuV	dB		
1	*	0.1850	56.85	0.13	56.98	64.25	-7.28	QP	
2		0.1850	37.83	0.13	37.96	54.25	-16.30	AVG	
3		0.2300	54.84	0.13	54.97	62.45	-7.48	QP	
4		0.2300	38.10	0.13	38.23	52.45	-14.22	AVG	
5		0.2750	51.82	0.13	51.95	60.97	-9.02	QP	
6		0.2750	33.84	0.13	33.97	50.97	-17.00	AVG	
7		0.3500	49.99	0.14	50.13	58.95	-8.83	QP	
8		0.3500	32.45	0.14	32.59	48.95	-16.37	AVG	
9		0.4450	45.19	0.17	45.36	56.97	-11.61	QP	
10		0.4450	28.86	0.17	29.03	46.97	-17.94	AVG	
11		1.8000	47.47	0.19	47.66	56.00	-8.34	QP	
12		1.8000	29.35	0.19	29.54	46.00	-16.46	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM 850
Fundamental Frequency : N/A
Temperature : 23°C
Humidity : 57%
Test Voltage : 120Vac

Test Date : Feb.08, 2006
Test By : Sky
Pol : Neutral
Adaptor Model : powersupply6
Supplier : Sagem

Conducted Emission Measurement



Site: SGS CONDUCTED #1

Phase: N

Temperature: 23 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120V/50Hz

Humidity: 57 %

EUT: GSM850/1900 MOBIL PHONE

Distance:

Air Pressure: hpa

M/N: A2005sa

Note: GSM850 LINK (Adaptor : powersupply6 with 18 910 715-4)

No.	Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1850	55.03	0.13	55.16	54.25	-9.10	QP	
2		0.1850	36.52	0.13	36.65	54.25	-17.61	AVG	
3	*	0.2350	54.23	0.13	54.36	52.27	-7.91	QP	
4		0.2350	38.41	0.13	38.54	52.27	-13.73	AVG	
5		0.2850	50.81	0.13	50.94	50.67	-9.73	QP	
6		0.2850	31.70	0.13	31.83	50.67	-18.84	AVG	
7		0.3500	49.19	0.14	49.33	58.95	-9.63	QP	
8		0.3500	33.36	0.14	33.50	48.95	-15.46	AVG	
9		0.4000	46.77	0.16	46.93	57.85	-10.92	QP	
10		0.4000	29.95	0.16	30.11	47.85	-17.74	AVG	
11		1.8900	46.01	0.19	46.20	56.00	-9.80	QP	
12		1.8900	26.61	0.19	26.80	46.00	-19.20	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM1900
 Fundamental Frequency : N/A
 Temperature : 23°C
 Humidity : 57%
 Test Voltage : 120Vac

Test Date : Feb.08, 2006
 Test By : Sky
 Pol : Line
 Adaptor Model : powersupply6
 Supplier : Sagem

Conducted Emission Measurement



Site: SGS CONDUCTED #1

Phase: L1

Temperature: 23 °C

Limit: CISPR22: Class B Conduction(QP)

Power: AC 120V/60Hz

Humidity: 57 %

EUT: GSM850/1900 MOBIL PHONE

Distance:

Air Pressure: hpa

M/N: A2005aa

Note: GSM1900 LINK (Adaptor : powersupply6 with 18 910 715-4)

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	57.51	0.13	57.64	66.00	-8.36	QP	
2		0.1500	43.79	0.13	43.92	56.00	-12.08	AVG	
3		0.2050	54.29	0.13	54.42	63.41	-8.99	QP	
4		0.2050	38.48	0.13	38.61	53.41	-14.80	AVG	
5		0.2350	52.97	0.13	53.10	62.27	-9.17	QP	
6		0.2350	37.46	0.13	37.59	52.27	-14.68	AVG	
7		0.2850	50.06	0.13	50.19	60.67	-10.48	QP	
8		0.2850	31.15	0.13	31.28	50.67	-19.39	AVG	
9		0.3550	48.50	0.15	48.65	58.84	-10.19	QP	
10		0.3550	34.07	0.15	34.22	48.84	-14.62	AVG	
11	*	1.7750	48.04	0.19	48.23	56.00	-7.77	QP	
12		1.7750	26.99	0.19	27.18	46.00	-18.82	AVG	


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM1900
Fundamental Frequency : N/A
Temperature : 23°C
Humidity : 57%
Test Voltage : 120Vac

Test Date : Feb.08, 2006
Test By : Sky
Pol : Neutral
Adaptor Model : powersupply6
Supplier : Sagem

Conducted Emission Measurement

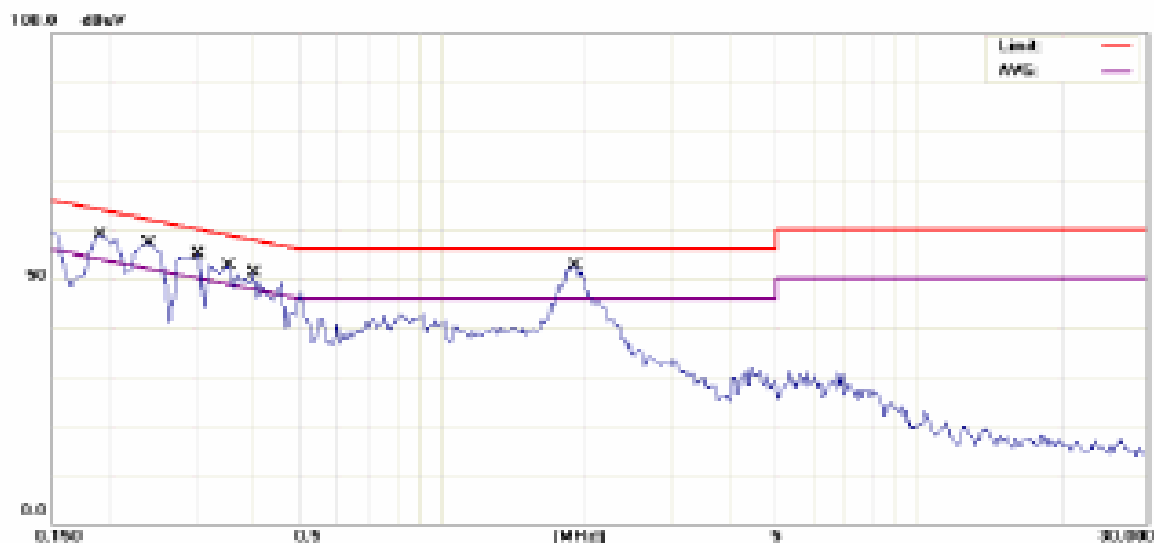

Site: SGS CONDUCTED #1

Phase: **N**

Temperature: 23 °C

Limit: CISPR22 Class B Conduction(QP)

Power: AC 120V/50Hz

Humidity: 57 %

EUT: GSM850/1900 MOBIL PHONE

Distance:

Air Pressure: hpa

MIN: A2005sa

Note: GSM1900 LINK (Adaptor : powersupply6 with 18 910 715-4)

No.	Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBμV	dB	dBμV	dBμV	dB		
1		0.1900	55.29	0.13	55.42	64.04	-8.62	QP	
2		0.1900	37.16	0.13	37.29	54.04	-16.75	AVG	
3		0.2400	53.37	0.13	53.50	62.10	-8.60	QP	
4		0.2400	39.13	0.13	39.26	52.10	-12.84	AVG	
5	*	0.3050	52.00	0.13	52.13	60.11	-7.98	QP	
6		0.3050	34.89	0.13	35.02	50.11	-15.09	AVG	
7		0.3550	49.73	0.15	49.88	58.84	-8.96	QP	
8		0.3550	32.39	0.15	32.54	48.84	-16.30	AVG	
9		0.4000	45.70	0.16	45.86	57.85	-11.99	QP	
10		0.4000	28.92	0.16	29.08	47.85	-18.77	AVG	
11		1.9050	45.66	0.20	45.86	56.00	-10.14	QP	
12		1.9050	25.50	0.20	25.70	46.00	-20.30	AVG	


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM 850
 Fundamental Frequency : N/A
 Temperature : 23°C
 Humidity : 57%
 Test Voltage : 120Vac

Test Date : Feb.08, 2006
 Test By : Sky
 Pol : Line
 Adaptor Model : powersupply7
 Supplier : Sagem

Conducted Emission Measurement

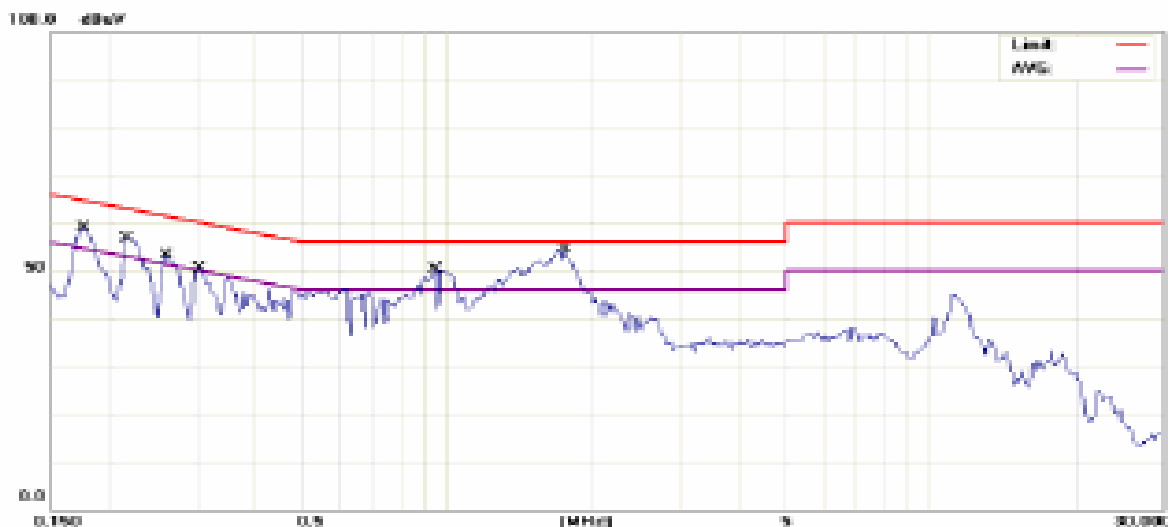

Site: SGS CONDUCTED #1

Limit: CISPR22 Class B Conduction(QP)

EUT: GSM850/1900 MOBIL PHONE

M/N: A2005sa

Note: GSM850 LINK (Adaptor : powersupply7 with 1.8 910 719-8)

Phase: L1

Power: AC 120W/50Hz

Distance:

Temperature: 23 °C

Humidity: 57 %

Air Pressure: hpa

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1750	53.56	0.13	53.69	64.72	-11.03	QP	
2		0.1750	35.23	0.13	35.36	64.72	-19.36	AVG	
3		0.2150	48.69	0.13	48.82	53.01	-14.19	QP	
4		0.2150	30.61	0.13	30.74	53.01	-22.27	AVG	
5		0.2600	45.84	0.13	45.97	51.43	-15.46	QP	
6		0.2600	24.06	0.13	24.19	51.43	-27.24	AVG	
7		0.3050	43.98	0.13	44.11	50.11	-16.00	QP	
8		0.3050	23.67	0.13	23.80	50.11	-26.31	AVG	
9		0.9500	46.27	0.15	46.42	56.00	-9.58	QP	
10		0.9500	28.25	0.15	28.40	46.00	-17.60	AVG	
11	"	1.7550	48.68	0.19	48.87	56.00	-7.13	QP	
12		1.7550	28.51	0.19	28.70	46.00	-17.30	AVG	


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM 850
Fundamental Frequency : N/A
Temperature : 23°C
Humidity : 57%
Test Voltage : 120Vac

Test Date : Feb.08, 2006
Test By : Sky
Pol : Neutral
Adaptor Model : powersupply7
Supplier : Sagem

Conducted Emission Measurement

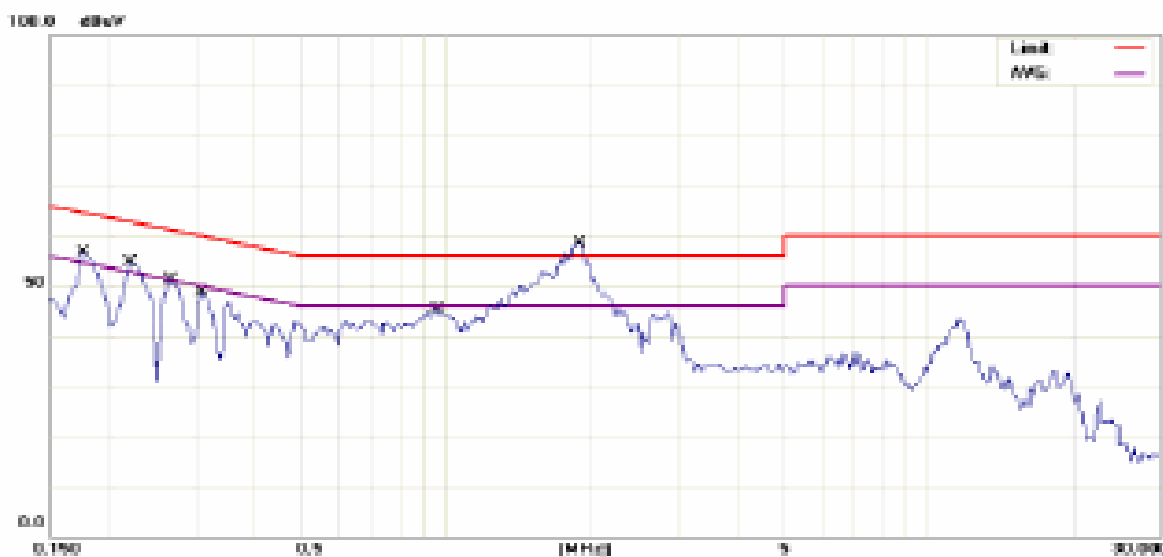

Site: SGS CONDUCTED #1
Limit: CISPR22 Class B Conduction(QP)
EUT: GSM850/1900 MOBIL PHONE
M/N: A2005aa

Phase: N
Power: AC 120W/50Hz
Distance:

Temperature: 23 °C
Humidity: 57 %
Air Pressure: kpa

Note: GSM850 LINK (Adaptor : powersupply7 with 1.8 91 0 71 9-6)


No.	Mk.	Freq.	Reading Level	Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1750	52.66	0.16	52.82	64.72	-11.90	QP	
2		0.1750	33.07	0.16	33.23	54.72	-21.49	AVG	
3		0.2200	50.82	0.13	50.95	62.82	-11.87	QP	
4		0.2200	31.07	0.13	31.20	52.82	-21.62	AVG	
5		0.2650	47.38	0.13	47.51	61.27	-13.76	QP	
6		0.2650	21.44	0.13	21.57	51.27	-29.70	AVG	
7		0.3100	44.28	0.13	44.41	59.97	-15.56	QP	
8		0.3100	23.12	0.13	23.25	49.97	-26.72	AVG	
9		0.9500	42.11	0.15	42.26	56.00	-13.74	QP	
10		0.9500	30.03	0.15	30.18	46.00	-15.82	AVG	
11	*	1.8900	51.02	0.28	51.30	56.00	-4.70	QP	
12		1.8900	28.06	0.28	28.34	46.00	-17.66	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode	: GSM1900	Test Date	: Feb.08, 2006
Fundamental Frequency	: N/A	Test By	: Sky
Temperature	: 23°C	Pol	: Line
Humidity	: 57%	Adaptor Model	: powersupply7
Test Voltage	: 120Vac	Supplier	: Sagem

Conducted Emission Measurement

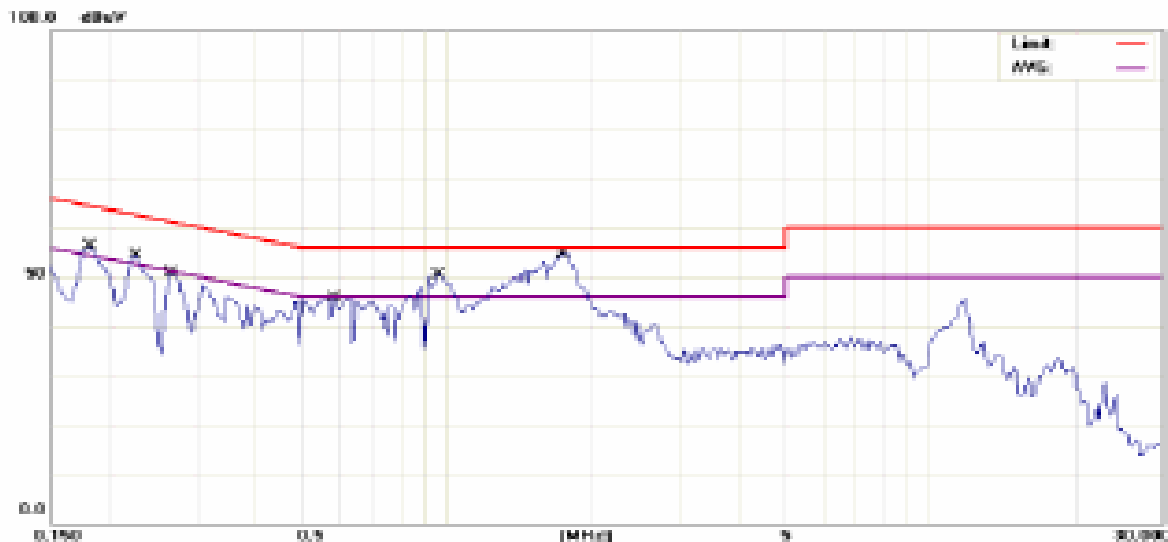

Site: SGS CONDUCTED #1	Phase: L1	Temperature: 23 °C
Limit: CISPR22 Class B Conduction(QP)	Power: AC 120V/50Hz	Humidity: 57 %
EUT: GSM850/1900 MOBIL PHONE	Distance:	Air Pressure: hpa
MW: A2005sa		
Note: GSM1900 LINK (Adaptor : powersupply7 with 18 910 719-6)		

No.	Mk.	Freq. MHz	Reading Level dBuV	Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	53.02	0.15	53.17	64.49	-11.32	QP	
2		0.1500	36.13	0.15	36.28	64.49	-18.21	AVG	
3		0.2250	50.96	0.13	51.09	62.63	-11.54	QP	
4		0.2250	34.98	0.13	35.11	62.63	-17.52	AVG	
5		0.2550	46.21	0.13	46.34	61.27	-14.93	QP	
6		0.2550	24.42	0.13	24.55	61.27	-26.72	AVG	
7		0.5800	43.07	0.18	43.25	56.00	-12.75	QP	
8		0.5800	25.34	0.18	25.52	46.00	-20.48	AVG	
9		0.9500	46.33	0.15	46.48	56.00	-9.52	QP	
10		0.9500	27.56	0.15	28.11	46.00	-17.89	AVG	
11	"	1.7400	50.15	0.26	50.41	56.00	-5.59	QP	
12		1.7400	34.14	0.26	34.40	46.00	-11.60	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode	: GSM1900	Test Date	: Feb.08, 2006
Fundamental Frequency	: N/A	Test By	: Sky
Temperature	: 23°C	Pol	: Neutral
Humidity	: 57%	Adaptor Model	: powersupply7
Test Voltage	: 120Vac	Supplier	: Sagem

Conducted Emission Measurement



Site: SGS CONDUCTED #1	Phase: N	Temperature: 23 °C
Limit: CISPR22 Class B Conduction(QP)	Power: AC 120W@50Hz	Humidity: 57 %
EUT: GSM850/1900 MOBIL PHONE	Distance:	Air Pressure: hpa
M/N: A2005aa		
Note: GSM1900 LINK (Adaptor : powersupply7 with 18 910 719-8)		

No.	Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1800	52.94	0.15	53.09	64.49	-11.40	QP	
2		0.1800	35.16	0.15	35.31	54.49	-19.18	AVG	
3		0.2200	50.76	0.13	50.89	62.82	-11.93	QP	
4		0.2200	31.26	0.13	31.39	52.82	-21.43	AVG	
5		0.2650	46.92	0.13	47.05	61.27	-14.22	QP	
6		0.2650	26.24	0.13	26.37	51.27	-24.90	AVG	
7		0.3100	43.92	0.13	44.05	59.97	-15.92	QP	
8		0.3100	24.03	0.13	24.16	49.97	-25.81	AVG	
9		0.9500	40.50	0.15	40.65	56.00	-15.35	QP	
10		0.9500	23.36	0.15	23.51	46.00	-22.49	AVG	
11	"	1.8500	51.50	0.28	51.78	56.00	-4.22	QP	
12		1.8500	28.10	0.28	28.38	46.00	-17.62	AVG	


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM 850
Fundamental Frequency : N/A
Temperature : 23°C
Humidity : 57%
Test Voltage : 120Vac

Test Date : Feb.08, 2006
Test By : Sky
Pol : Line
Adaptor Model : powersupply8
Supplier : Sagem

Conducted Emission Measurement

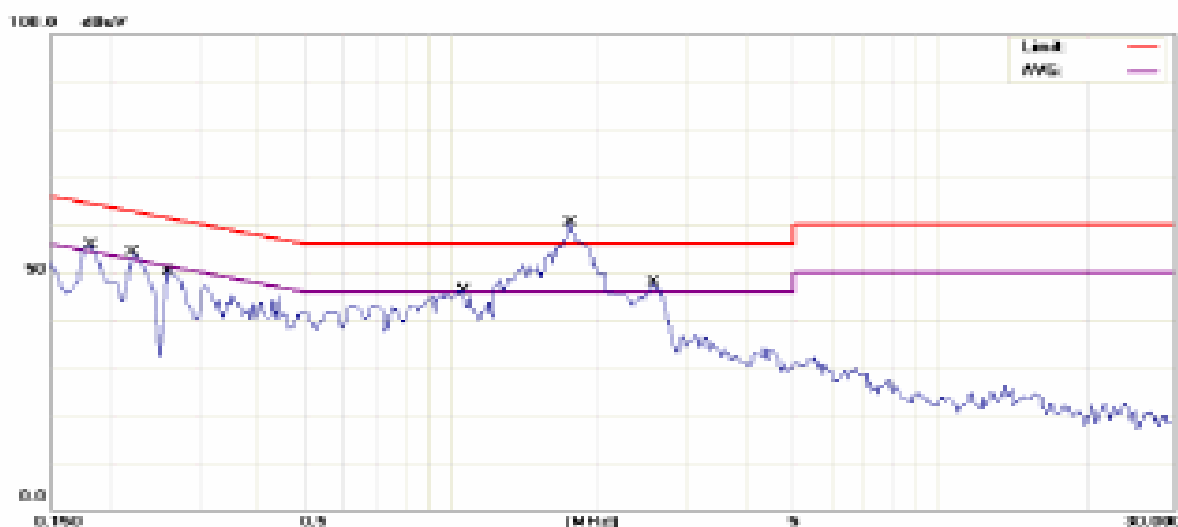

Site: SGS CONDUCTED #1

Limit: CISPR22 Class B Conduction(QP)

EUT: GSM850/1900 MOBIL PHONE

M/N: A2005aa

Note: GSM850 LINK (Adaptor : powersupply8 with 1.8 G1 0 718-8)

Phase: L1

Power: AC 120V/50Hz

Distance:

Temperature: 23 °C

Humidity: 57 %

Air Pressure: kpa

No.	Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1800	52.12	0.13	52.25	64.49	-12.24	QP	
2		0.1800	34.16	0.13	34.29	54.49	-20.20	AVG	
3		0.2200	48.91	0.13	49.04	62.82	-13.78	QP	
4		0.2200	30.66	0.13	30.79	52.82	-22.03	AVG	
5		0.2600	40.73	0.13	40.86	51.43	-20.57	QP	
6		0.2600	22.03	0.13	22.16	51.43	-29.27	AVG	
7		1.0650	40.43	0.15	40.58	56.00	-15.42	QP	
8		1.0650	24.19	0.15	24.34	46.00	-21.66	AVG	
9	"	1.7500	54.84	0.19	55.03	56.00	-0.97	QP	
10		1.7500	35.06	0.19	35.25	46.00	-10.75	AVG	
11		2.5750	41.41	0.24	41.65	56.00	-14.35	QP	
12		2.5750	25.01	0.24	25.25	46.00	-20.75	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : GSM 850
Fundamental Frequency : N/A
Temperature : 23°C
Humidity : 57%
Test Voltage : 120Vac

Test Date : Feb.08, 2006
Test By : Sky
Pol : Neutral
Adaptor Model : powersupply8
Supplier : Sagem

Conducted Emission Measurement



Site: SGS CONDUCTED #1

Limit: CISPR22 Class B Conduction(QP)

EUT: GSM850/1900 MOBIL PHONE

Mkt: A2005sa

Note: GSM850 LINK (Adaptor : powersupply8 with 1.8 G10718-8)

Phase: N

Power: AC 100W/50Hz

Distance:

Temperature: 23 °C

Humidity: 57 %

Air Pressure: hpa

No.	Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1800	51.54	0.15	51.69	64.49	-12.80	QP	
2		0.1800	34.42	0.15	34.57	64.49	-19.92	AVG	
3		0.2250	49.25	0.13	49.38	62.63	-13.25	QP	
4		0.2250	33.68	0.13	33.81	62.63	-18.82	AVG	
5		0.5050	39.13	0.18	39.31	56.00	-16.69	QP	
6		0.5050	23.91	0.18	24.09	46.00	-21.91	AVG	
7		0.9300	44.08	0.15	44.23	56.00	-11.77	QP	
8		0.9300	31.01	0.15	31.16	46.00	-14.84	AVG	
9		1.2750	44.53	0.19	44.72	56.00	-11.28	QP	
10		1.2750	29.33	0.19	29.52	46.00	-16.48	AVG	
11	*	1.8150	50.38	0.27	50.65	56.00	-5.35	QP	
12		1.8150	32.95	0.27	33.22	46.00	-12.78	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode	: GSM1900	Test Date	: Feb.08, 2006
Fundamental Frequency	: N/A	Test By	: Sky
Temperature	: 23°C	Pol	: Line
Humidity	: 57%	Adaptor Model	: powersupply8
Test Voltage	: 120Vac	Supplier	: Sagem

Conducted Emission Measurement



Site: SGS CONDUCTED #1	Phase: L1	Temperature: 23 °C
Limit: CISPR22: Class B Conduction(QP)	Power: AC 120V60Hz	Humidity: 57 %
EUT: GSM850/1900 MOBIL PHONE	Distance:	Air Pressure: hpa
M/N: A2005sa		
Note: GSM1900 LINK (Adaptor : powersupply8 with 18.910 718-8)		

No.	Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1750	53.82	0.13	53.95	64.72	-10.77	QP	
2		0.1750	33.80	0.13	33.93	54.72	-20.79	AVG	
3		0.2150	49.34	0.13	49.47	63.01	-13.54	QP	
4		0.2150	29.59	0.13	29.72	53.01	-23.29	AVG	
5		0.2500	45.05	0.13	45.19	61.43	-15.24	QP	
6		0.2500	24.90	0.13	25.03	51.43	-26.40	AVG	
7		0.3000	40.54	0.13	40.67	60.24	-19.57	QP	
8		0.3000	21.81	0.13	21.94	50.24	-28.30	AVG	
9		1.0400	40.18	0.15	40.33	56.00	-15.67	QP	
10		1.0400	24.19	0.15	24.34	46.00	-21.66	AVG	
11	*	1.7050	50.05	0.19	50.25	56.00	-5.75	QP	
12		1.7050	28.00	0.19	28.19	46.00	-17.81	AVG	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode	: GSM1900	Test Date	: Feb.08, 2006
Fundamental Frequency	: N/A	Test By	: Sky
Temperature	: 23°C	Pol	: Neutral
Humidity	: 57%	Adaptor Model	: powersupply8
Test Voltage	: 120Vac	Supplier	: Sagem

Conducted Emission Measurement



Site: SGS CONDUCTED #1	Phase: N	Temperature: 23 °C
Limit: CISPR22 Class B Conduction(QP)	Power: AC 120V/60Hz	Humidity: 57 %
EUT: GSM850/1900 MOBIL PHONE	Distance:	Air Pressure: hpa
M/N: A2005sa		
Note: GSM1900 LINK (Adaptor : powersupply8 with 18 910 718-8)		

No.	Mk.	Freq.	Reading Level	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBμV	dB	dBμV	dBμV	dB		
1		0.1500	50.69	0.15	50.84	64.49	-13.65	QP	
2		0.1500	33.02	0.15	33.17	54.49	-21.32	AVG	
3		0.2250	48.62	0.13	48.75	52.63	-13.88	QP	
4		0.2250	32.48	0.13	32.61	52.63	-20.02	AVG	
5		0.5100	38.72	0.18	38.90	56.00	-17.10	QP	
6		0.5100	21.78	0.18	21.96	46.00	-24.04	AVG	
7		0.9350	44.16	0.15	44.31	56.00	-11.69	QP	
8		0.9350	27.34	0.15	27.49	46.00	-18.51	AVG	
9		1.4409	41.13	0.22	41.35	56.00	-14.65	QP	
10		1.4409	24.26	0.22	24.48	46.00	-21.52	AVG	
11	*	1.8150	49.90	0.27	50.17	56.00	-5.83	QP	
12		1.8150	33.01	0.27	33.28	46.00	-12.72	AVG	


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : Data cable
Fundamental Frequency : N/A
Temperature : 23°C
Humidity : 57%
Test Voltage : 120Vac

Test Date : Dec.20, 2005
Test By : Sky
Pol : Line
Adaptor Model : N/A
Supplier : Sagem

Conducted Emission Measurement

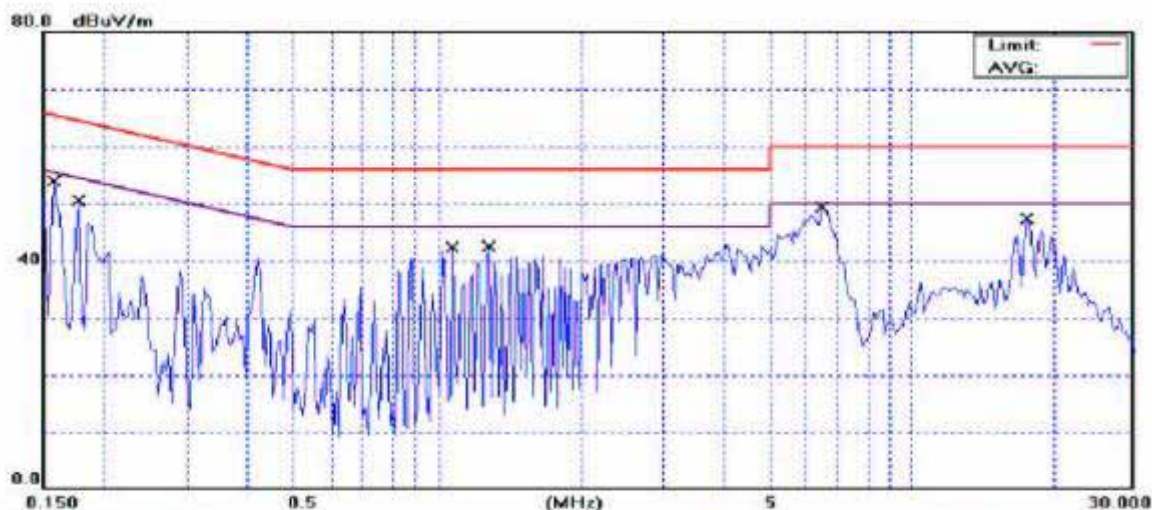

Site: SGS CONDUCTED #1
Limit: EN55022 Class B Conduction(QP)
EUT: GSM850/1900 mobile phone
M/N: A2005sa
Note: GSM1900 LINK (data cable)

Phase: L1
Power: AC120V/60HZ
Distance:

Temperature: 24 °C
Humidity: 66 %
Air Pressure: hpa

No.	MHz	Freq.	Reading Level	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1		0.1578	57.39	0.20	57.59	65.58	-7.99	QP	
2		0.1578	35.65	0.20	35.85	55.58	-19.73	AVG	
3		0.1773	51.22	0.20	51.42	64.61	-13.19	QP	
4		0.1773	34.39	0.20	34.59	54.61	-20.02	AVG	
5		1.0836	43.38	0.20	43.58	56.00	-12.42	QP	
6	*	1.0836	42.85	0.20	43.05	46.00	-2.95	AVG	
7		1.2828	43.84	0.20	44.04	56.00	-11.96	QP	
8		1.2828	42.03	0.20	42.23	46.00	-3.77	AVG	
9		6.5094	43.82	0.53	44.35	60.00	-15.65	QP	
10		6.5094	43.35	0.53	43.88	50.00	-6.12	AVG	
11		17.5055	46.16	0.70	46.86	60.00	-13.14	QP	
12		17.5055	40.79	0.70	41.49	50.00	-8.51	AVG	


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode : Normal Operating
Fundamental Frequency : N/A
Temperature : 23°C
Humidity : 57%
Test Voltage : 120Vac

Test Date : Dec.20, 2005
Test By : Sky
Pol : Neutral
Adaptor Model : Data cable
Supplier : Sagem

Conducted Emission Measurement

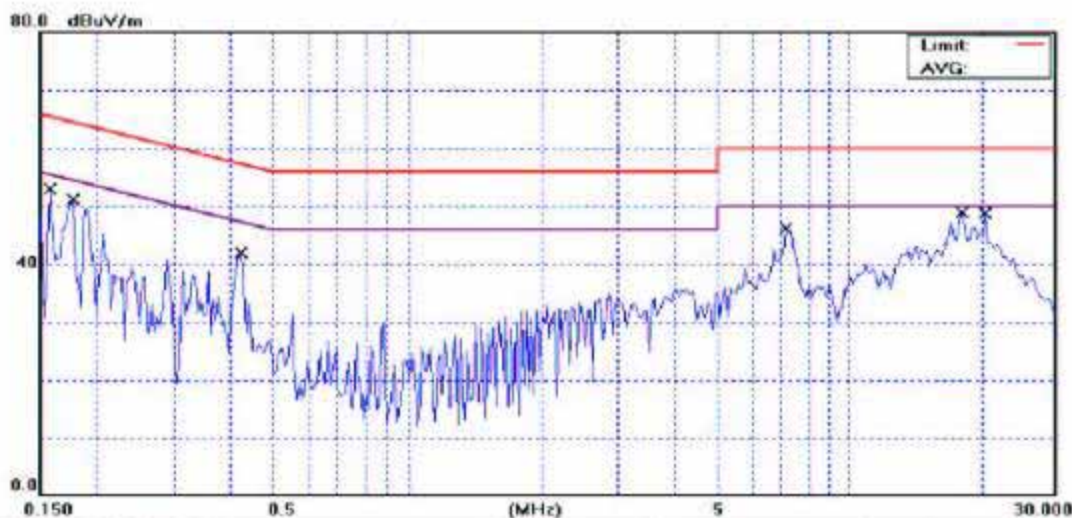

Site: SGS CONDUCTED #1
Limit: EN55022 Class B Conduction(QP)
EUT: GSM850/1900 mobile phone
M/N: A2005sa
Note: GSM1900 LINK (data cable)

Phase: N
Power: AC120V/60HZ
Distance:

Temperature: 24 °C
Humidity: 56 %
Air Pressure: hpa

No.	ME	Freq MHz	Reading Level dBuV/m	Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		0.1578	57.22	0.20	57.42	65.58	-8.16	QP	
2		0.1578	40.47	0.20	40.67	55.58	-14.91	AVG	
3		0.1773	51.02	0.20	51.22	64.61	-13.39	QP	
4		0.1773	36.47	0.20	36.67	54.61	-17.94	AVG	
5		0.4234	40.25	0.20	40.45	57.38	-16.93	QP	
6	*	0.4234	39.89	0.20	40.09	47.38	-7.29	AVG	
7		7.2008	43.78	0.56	44.34	60.00	-15.66	QP	
8		7.2008	36.53	0.56	37.09	50.00	-12.91	AVG	
9		17.9625	44.98	0.76	45.74	60.00	-14.26	QP	
10		17.9625	36.90	0.76	37.66	50.00	-12.34	AVG	
11		20.2594	40.82	0.81	41.63	60.00	-18.37	QP	
12		20.2594	32.82	0.81	33.63	50.00	-16.37	AVG	


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6. Radiated Emission Test


6.1 Measurement Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.

6.2 Test SET-UP (Block Diagram of Configuration)

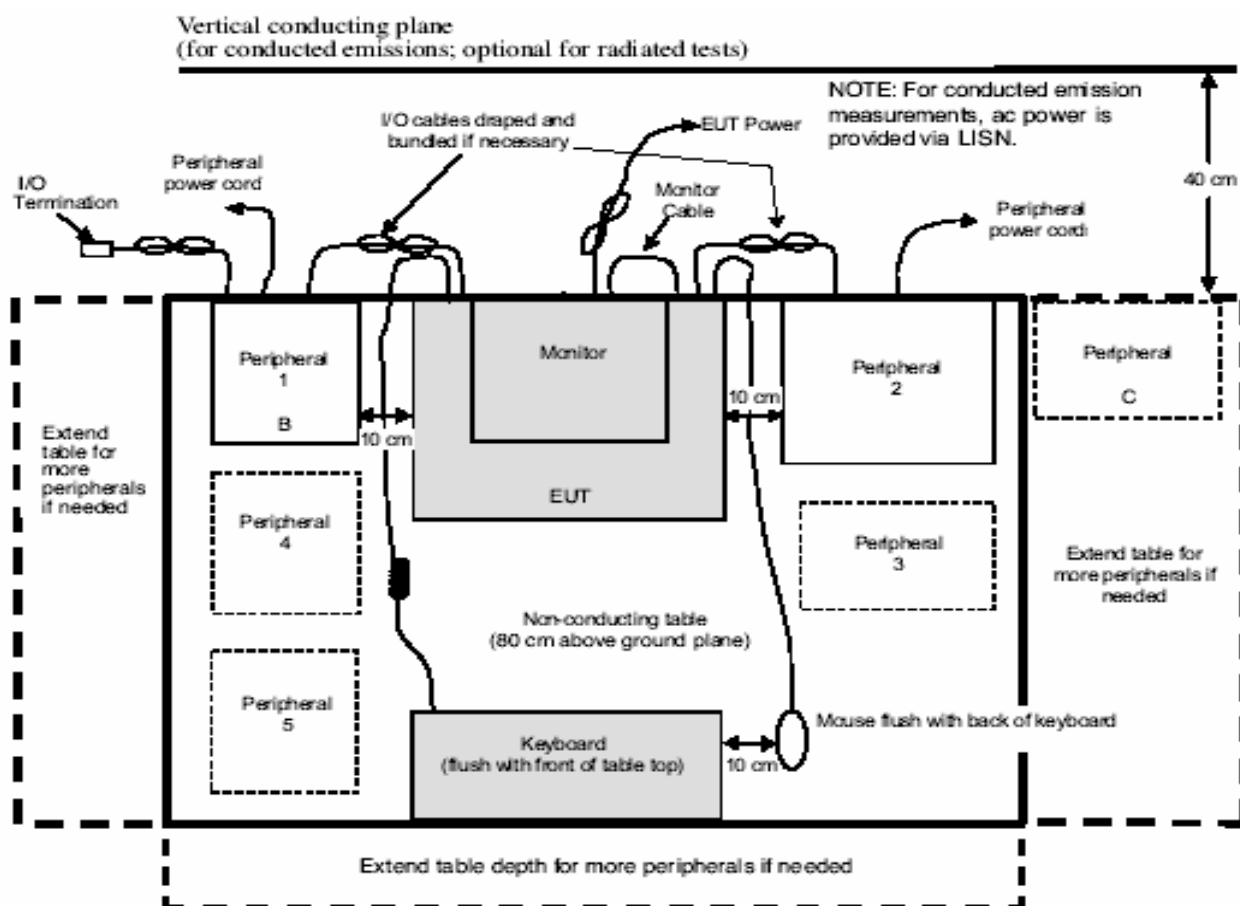

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

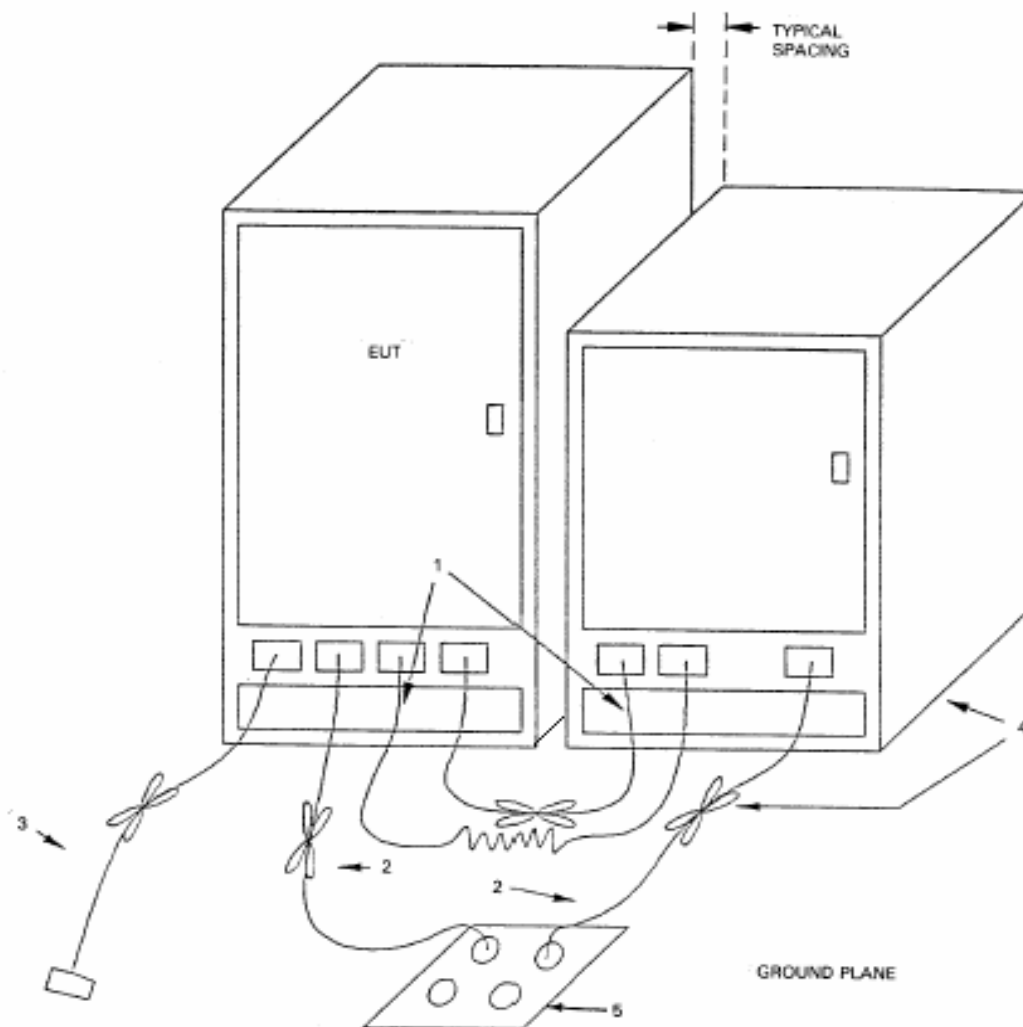

LEGEND:

- 1) Excess I/O cables shall be bundled in center. If bundling is not possible, the cables shall be arranged in serpentine fashion. Bundling not to exceed 40 cm in length (see 6.1.4).
- 2) Excess power cords shall be bundled in the center or shortened to appropriate length (see 7.2.1).
- 3) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. If bundling is not possible, the cable shall be arranged in a serpentine fashion (see 6.1.4).
- 4) EUT and all cables shall be insulated, if required, from the groundplane by up to 12 mm of insulating material (see 6.1.4 and 6.2.2).
- 5) If LISNs are kept in the test setup for radiated emissions, it is preferred that they be installed under the groundplane with the receptacle flush with the ground plane (see 5.2.3 and 8.1).

Figure 11b—Test arrangement for radiated emissions floor-standing equipment

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2005	03/28/2006
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2005	06/29/2006
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2005	11/10/2006
Communication Test	R&S	SMU200	N/A	N/A	N/A
Bilog Antenna	SCHWAZBECK	VULB9163	152	06/03/2005	06/02/2006
Horn antenna	Schwarzbeck	BBHA 9120D	309/320	08/16/2005	08/15/2006
Pre-Amplifier	HP	8447D	2944A09469	07/19/2005	07/18/2006
Pre-Amplifier	HP	8494B	3008A00578	02/26/2005	02/25/2006
Signal Generator	R&S	SMR40	100210	02/09/2005	02/10/2006
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R
Controller	HD	HD100	N/A	N.C.R	N.C.R
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	10/09/2005	10/08/2006
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	10/09/2005	10/08/2006
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-0.5M	0.5m	10/09/2005	10/08/2006
Site NSA	SGS	966 chamber	N/A	11/17/2005	11/16/2006

6.4 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.5 Measurement Result

Operation Mode : GSM 850
Fundamental Frequency : N/A
Temperature : 25°C
Humidity : 65%

Test Date : Dec.16, 2005
Test By : Sky
Pol. : Ver./Hor.
Adaptor Model : powersupply1
Supplier : Sagem

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
61.04	V	Peak	42.63	-14.82	27.81	40.00	-12.19
75.59	V	Peak	40.29	-17.66	22.63	40.00	-17.37
106.63	V	Peak	37.73	-16.65	21.08	43.50	-22.42
61.04	H	Peak	41.45	-14.82	26.63	40.00	-13.37
124.09	H	Peak	33.46	-15.19	18.27	43.50	-25.23

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
- (3) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA 30MHz to 1GHz was 100KHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.6 Measurement Result

Operation Mode : GSM 1900
Fundamental Frequency : N/A
Temperature : 25°C
Humidity : 65%

Test Date : Dec.16, 2005
Test By : Sky
Pol. : Ver./Hor.
Adaptor Model : powersupply1
Supplier : Sagem

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
61.04	V	Peak	37.20	-14.82	22.38	40.00	-17.62
104.69	V	Peak	38.02	-16.82	21.20	43.50	-22.30
329.73	V	Peak	36.98	-12.51	24.47	46.00	-21.53
58.13	H	Peak	35.39	-14.85	20.54	40.00	-19.46
90.14	H	Peak	36.85	-17.89	18.96	43.50	-24.54

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
- (3) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA 30MHz to 1GHz was 100KHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.7 Measurement Result

Operation Mode : GSM 850
Fundamental Frequency : N/A
Temperature : 25°C
Humidity : 65%

Test Date : Dec.16, 2005
Test By : Sky
Pol. : Ver./Hor.
Adaptor Model : powersupply2
Supplier : Sagem

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
64.92	V	Peak	38.27	-15.08	23.19	40.00	-16.81
75.59	V	Peak	40.65	-17.66	22.99	40.00	-17.01
104.69	V	Peak	37.59	-16.82	20.77	43.50	-22.73
153.19	V	Peak	34.13	-13.67	20.46	43.50	-23.04
38.73	H	Peak	34.65	-14.77	19.88	40.00	-20.12
65.89	H	Peak	39.36	-15.35	24.01	40.00	-15.99
126.03	H	Peak	37.31	-15.03	22.28	43.50	-21.22

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
- (3) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA 30MHz to 1GHz was 100KHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.8 Measurement Result

Operation Mode : GSM 1900
Fundamental Frequency : N/A
Temperature : 25°C
Humidity : 65%

Test Date : Dec.16, 2005
Test By : Sky
Pol. : Ver./Hor.
Adaptor Model : powersupply2
Supplier : Sagem

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
70.74	V	Peak	42.23	-16.62	25.61	40.00	-14.39
121.18	V	Peak	40.68	-15.42	25.26	43.50	-18.24
65.89	H	Peak	36.74	-15.35	21.39	40.00	-18.61
85.29	H	Peak	39.52	-18.52	21.00	40.00	-19.00

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
- (3) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA 30MHz to 1GHz was 100KHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.9 Measurement Result

Operation Mode : GSM 850
Fundamental Frequency : N/A
Temperature : 25°C
Humidity : 65%

Test Date : Dec.16, 2005
Test By : Sky
Pol. : Ver./Hor.
Adaptor Model : powersupply3
Supplier : Sagem

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
61.04	V	Peak	41.36	-14.82	26.54	40.00	-13.46
75.59	V	Peak	40.38	-17.66	22.72	40.00	-17.28
159.98	V	Peak	36.22	-14.28	21.94	43.50	-21.56
61.04	H	Peak	41.23	-14.82	26.41	40.00	-13.59
206.54	H	Peak	35.80	-16.49	19.31	43.50	-24.19
313.24	H	Peak	39.46	-13.00	26.46	46.00	-19.54

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
- (3) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA 30MHz to 1GHz was 100KHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.10 Measurement Result

Operation Mode : GSM 1900
Fundamental Frequency : N/A
Temperature : 25°C
Humidity : 65%

Test Date : Dec.16, 2005
Test By : Sky
Pol. : Ver./Hor.
Adaptor Model : powersupply3
Supplier : Sagem

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
70.74	V	Peak	42.23	-16.62	25.61	40.00	-14.39
121.18	V	Peak	40.68	-15.42	25.26	43.50	-18.24
65.89	H	Peak	36.74	-15.35	21.39	40.00	-18.61
85.29	H	Peak	39.52	-18.52	21.00	40.00	-19.00

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
- (3) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA 30MHz to 1GHz was 100KHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.11 Measurement Result

Operation Mode : GSM 850
Fundamental Frequency : N/A
Temperature : 25°C
Humidity : 65%

Test Date : Dec.16, 2005
Test By : Sky
Pol. : Ver./Hor.
Adaptor Model : powersupply4
Supplier : Sagem

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
61.04	V	QP	52.10	-14.82	37.28	40.00	-2.72
92.08	V	Peak	52.42	-17.77	34.65	43.50	-8.85
106.63	V	Peak	37.98	-16.65	21.33	43.50	-22.17
61.04	H	Peak	52.19	-14.82	37.37	40.00	-2.63
72.68	H	Peak	50.24	-17.04	33.20	40.00	-6.80
126.03	H	Peak	36.07	-15.03	21.04	43.50	-22.46

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
- (3) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA 30MHz to 1GHz was 100KHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.12 Measurement Result

Operation Mode : GSM 1900
Fundamental Frequency : N/A
Temperature : 25°C
Humidity : 65%

Test Date : Dec.16, 2005
Test By : Sky
Pol. : Ver./Hor.
Adaptor Model : powersupply4
Supplier : Sagem

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
58.13	V	Peak	48.97	-14.85	34.12	40.00	-5.88
85.29	V	Peak	55.43	-18.52	36.91	40.00	-3.09
111.48	V	Peak	47.52	-16.25	31.27	43.50	-12.23
153.19	V	Peak	33.33	-13.67	19.66	43.50	-23.84
298.69	V	Peak	32.17	-13.43	18.74	46.00	-27.26
426.73	V	Peak	31.87	-10.12	21.75	46.00	-24.25
60.07	H	Peak	44.72	-14.76	29.96	40.00	-10.04
75.59	H	Peak	49.62	-17.66	31.96	40.00	-8.04
92.08	H	Peak	43.67	-17.77	25.90	43.50	-17.60
109.54	H	Peak	38.70	-16.42	22.28	43.50	-21.22
159.98	H	Peak	32.12	-14.28	17.84	43.50	-25.66
329.73	H	Peak	31.29	-12.51	18.78	46.00	-27.22

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
- (3) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA 30MHz to 1GHz was 100KHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.13 Measurement Result

Operation Mode : GSM 850
Fundamental Frequency : N/A
Temperature : 25°C
Humidity : 65%

Test Date : Dec.16, 2005
Test By : Sky
Pol. : Ver./Hor.
Adaptor Model : powersupply5
Supplier : Sagem

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
61.04	V	Peak	42.36	-14.82	27.54	40.00	-12.46
75.59	V	Peak	40.78	-17.66	23.12	40.00	-16.88
92.08	V	Peak	39.83	-17.77	22.06	43.50	-21.44
153.19	V	Peak	34.26	-13.67	20.59	43.50	-22.91
61.04	H	Peak	39.57	-14.82	24.75	40.00	-15.25
75.59	H	Peak	36.36	-17.66	18.70	40.00	-21.30
143.49	H	Peak	31.84	-13.68	18.16	43.50	-25.34

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
- (3) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA 30MHz to 1GHz was 100KHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.14 Measurement Result

Operation Mode : GSM 1900
Fundamental Frequency : N/A
Temperature : 25°C
Humidity : 65%

Test Date : Dec.16, 2005
Test By : Sky
Pol. : Ver./Hor.
Adaptor Model : powersupply5
Supplier : Sagem

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
70.74	V	Peak	42.23	-16.62	25.61	40.00	-14.39
121.18	V	Peak	40.68	-15.42	25.26	43.50	-18.24
65.89	H	Peak	36.74	-15.35	21.39	40.00	-18.61
85.29	H	Peak	39.52	-18.52	21.00	40.00	-19.00

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
- (3) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA 30MHz to 1GHz was 100KHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.15 Measurement Result

Operation Mode : GSM850
Fundamental Frequency : N/A
Temperature : 25°C
Humidity : 65%

Test Date : Feb.08, 2006
Test By : Sky
Pol. : Ver./Hor.
Adaptor Model : powersupply6
Supplier : Sagem

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
58.13	V	Peak	40.24	-14.85	25.39	40.00	-14.61
75.59	V	Peak	39.72	-17.66	22.06	40.00	-17.94
104.69	V	Peak	38.62	-16.82	21.80	43.50	-21.70
145.43	V	Peak	35.77	-13.58	22.19	43.50	-21.31
58.13	H	Peak	37.92	-14.85	23.07	40.00	-16.93
65.89	H	Peak	37.15	-15.35	21.80	40.00	-18.20
106.63	H	Peak	39.55	-16.65	22.90	43.50	-20.60
162.89	H	Peak	33.87	-14.41	19.46	43.50	-24.04
240.49	H	Peak	33.02	-15.55	17.47	46.00	-28.53
478.14	H	Peak	33.32	-9.50	23.82	46.00	-22.18

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
- (3) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA 30MHz to 1GHz was 100KHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.16 Measurement Result

Operation Mode :GSM1900
Fundamental Frequency : N/A
Temperature : 25°C
Humidity : 65%

Test Date :Feb.08, 2006
Test By :Sky
Pol. :Ver./Hor.
Adaptor Model :powersupply6
Supplier :Sagem

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
31.94	V	Peak	39.02	-15.21	23.81	40.00	-16.19
58.13	V	Peak	39.98	-14.85	25.13	40.00	-14.87
75.59	V	Peak	39.13	-17.66	21.47	40.00	-18.53
92.08	V	Peak	38.42	-17.77	20.65	43.50	-22.85
106.63	V	Peak	37.71	-16.65	21.06	43.50	-22.44
182.29	V	Peak	33.98	-15.35	18.63	43.50	-24.87
43.58	H	Peak	43.25	-14.64	28.61	40.00	-11.39
58.13	H	Peak	47.75	-14.85	32.90	40.00	-7.10
92.08	H	Peak	38.95	-17.77	21.18	43.50	-22.32
106.63	H	Peak	41.43	-16.65	24.78	43.50	-18.72
133.79	H	Peak	33.38	-14.39	18.99	43.50	-24.51
523.73	H	Peak	33.25	-8.89	24.36	46.00	-21.64

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
- (3) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA 30MHz to 1GHz was 100KHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.17 Measurement Result

Operation Mode : GSM 850
Fundamental Frequency : N/A
Temperature : 25°C
Humidity : 65%

Test Date :Feb.08, 2006
Test By :Sky
Pol. :Ver./Hor.
Adaptor Model :powersupply7
Supplier :Sagem

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
51.34	V	Peak	40.69	-14.83	25.86	40.00	-14.14
61.04	V	Peak	48.33	-14.82	33.51	40.00	-6.49
92.08	V	Peak	41.80	-17.77	24.03	43.50	-19.47
104.69	V	Peak	49.88	-16.82	33.06	43.50	-10.44
153.19	V	Peak	33.76	-13.67	20.09	43.50	-23.41
41.64	H	Peak	41.10	-14.67	26.43	40.00	-13.57
62.98	H	Peak	47.74	-14.95	32.79	40.00	-7.21
104.69	H	Peak	46.22	-16.82	29.40	43.50	-14.10
187.14	H	Peak	34.90	-15.72	19.18	43.50	-24.32
434.49	H	Peak	45.75	-14.95	30.80	46.00	-15.20

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
- (3) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA 30MHz to 1GHz was 100KHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.18 Measurement Result

Operation Mode :GSM1900
 Fundamental Frequency : N/A
 Temperature : 25°C
 Humidity : 65%

Test Date :Feb.08, 2006
 Test By :Sky
 Pol. :Ver./Hor.
 Adaptor Model :powersupply7
 Supplier :Sagem

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
58.13	V	Peak	48.96	-14.85	34.11	40.00	-5.89
92.08	V	Peak	38.37	-17.77	20.60	43.50	-22.90
135.73	V	Peak	32.75	-14.23	18.52	43.50	-24.98
153.19	V	Peak	32.27	-13.67	18.60	43.50	-24.90
182.29	V	Peak	33.04	-15.35	17.69	43.50	-25.81
43.58	H	Peak	42.75	-14.64	28.11	40.00	-11.89
58.13	H	Peak	48.60	-14.85	33.75	40.00	-6.25
90.14	H	Peak	37.47	-17.89	19.58	43.50	-23.92
106.63	H	Peak	39.26	-16.65	22.61	43.50	-20.89
135.73	H	Peak	33.04	-14.23	18.81	43.50	-24.69

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
- (3) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA 30MHz to 1GHz was 100KHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.19 Measurement Result

Operation Mode : GSM850
Fundamental Frequency : N/A
Temperature : 25°C
Humidity : 65%

Test Date :Feb.08, 2006
Test By :Sky
Pol. :Ver./Hor.
Adaptor Model :powersupply8
Supplier :Sagem

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
58.13	V	Peak	44.88	-14.85	30.03	40.00	-9.97
75.59	V	Peak	39.16	-17.66	21.50	40.00	-18.50
92.08	V	Peak	40.37	-17.77	22.60	43.50	-20.90
106.63	V	Peak	36.82	-16.65	20.17	43.50	-23.33
159.98	V	Peak	39.35	-14.28	25.07	43.50	-18.43
41.64	H	Peak	42.00	-14.67	27.33	40.00	-12.67
58.13	H	Peak	48.25	-14.85	33.40	40.00	-6.60
106.63	H	Peak	40.51	-16.65	23.86	43.50	-19.64
121.18	H	Peak	42.26	-15.42	26.84	43.50	-16.66
150.28	H	Peak	31.77	-13.40	18.37	43.50	-25.13
366.59	H	Peak	32.61	-11.51	21.10	46.00	-24.90

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
- (3) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA 30MHz to 1GHz was 100KHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.20 Measurement Result

Operation Mode :GSM 1900
Fundamental Frequency : N/A
Temperature : 25°C
Humidity : 65%

Test Date :Feb.08, 2006
Test By :Sky
Pol. :Ver./Hor.
Adaptor Model :powersupply8
Supplier :Sagem

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
58.13	V	Peak	43.94	-14.85	29.09	40.00	-10.91
75.59	V	Peak	39.20	-17.66	21.54	40.00	-18.46
104.69	V	Peak	37.80	-16.82	20.98	43.50	-22.52
158.04	V	Peak	33.70	-14.12	19.58	43.50	-23.92
182.29	V	Peak	33.44	-15.35	18.09	43.50	-25.41
43.58	H	Peak	42.58	-14.64	27.94	40.00	-12.06
58.13	H	Peak	48.05	-14.85	33.20	40.00	-6.80
90.14	H	Peak	37.99	-17.89	20.10	43.50	-23.40
106.63	H	Peak	39.05	-16.65	22.40	43.50	-21.10
133.79	H	Peak	32.48	-14.39	18.09	43.50	-25.41

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
- (3) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA 30MHz to 1GHz was 100KHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.21 Measurement Result

Operation Mode : Data Cable
Fundamental Frequency : N/A
Temperature : 25°C
Humidity : 65%

Test Date : Dec.26, 2005
Test By : Sky
Pol. : Ver./Hor.
Adaptor Model : N/A
Supplier : Sagem

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
31.94	V	QP	50.30	-15.21	35.09	40.00	-4.91
58.13	V	Peak	51.87	-14.85	37.02	40.00	-2.98
75.59	V	Peak	53.69	-17.66	36.03	40.00	-3.97
82.38	V	Peak	60.42	-18.49	41.93	40.00	1.93
99.84	V	Peak	48.70	-17.23	31.47	43.50	-12.03
232.73	V	Peak	49.43	-15.76	33.67	46.00	-12.33
99.84	H	Peak	47.37	-17.23	30.14	43.50	-13.36
167.74	H	Peak	45.96	-14.63	31.33	43.50	-12.17
196.84	H	Peak	45.39	-16.44	28.95	43.50	-14.55
232.73	H	Peak	48.16	-15.76	32.40	46.00	-13.60
499.48	H	Peak	41.60	-9.30	32.30	46.00	-13.70

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
- (3) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA 30MHz to 1GHz was 100KHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.22 Measurement Result

Operation Mode : Earphone, 850MHz
Fundamental Frequency : N/A
Temperature : 25°C
Humidity : 65%

Test Date : Dec.26, 2005
Test By : Sky
Pol. : Ver./Hor.
Adaptor Model : N/A
Supplier : Sagem

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
75.54	V	Peak	40.36	-17.66	22.70	40.00	-17.30
106.63	V	Peak	37.38	-16.65	20.73	43.50	-22.77
153.19	V	Peak	33.73	-13.67	20.06	43.50	-23.44
33.88	H	Peak	36.07	-15.13	20.94	40.00	-19.06
65.89	H	Peak	36.67	-15.35	21.32	40.00	-18.68
75.59	H	Peak	36.62	-17.66	18.96	40.00	-21.04

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
- (3) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA 30MHz to 1GHz was 100KHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.23 Measurement Result

Operation Mode : Earphone, 1900MHz
Fundamental Frequency : N/A
Temperature : 25°C
Humidity : 65%

Test Date : Dec.26, 2005
Test By : Sky
Pol. : Ver./Hor.
Adaptor Model : N/A
Supplier : Sagem

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
56.19	V	Peak	38.40	-14.95	23.45	40.00	-16.55
92.08	V	Peak	39.54	-17.77	21.77	43.50	-21.73
101.78	V	Peak	37.85	-17.07	20.78	43.50	-22.72
123.12	V	Peak	37.45	-15.27	22.18	43.50	-21.32
56.19	H	Peak	35.14	-14.95	20.19	40.00	-19.81
92.08	H	Peak	38.50	-17.77	20.73	43.50	-22.77

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz.
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
- (3) Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA 30MHz to 1GHz was 100KHz.



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

APPENDIX 1

PHOTOGRPHS OF SET UP



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Radiated Emission Test Setup Photo (Power Adaptor)

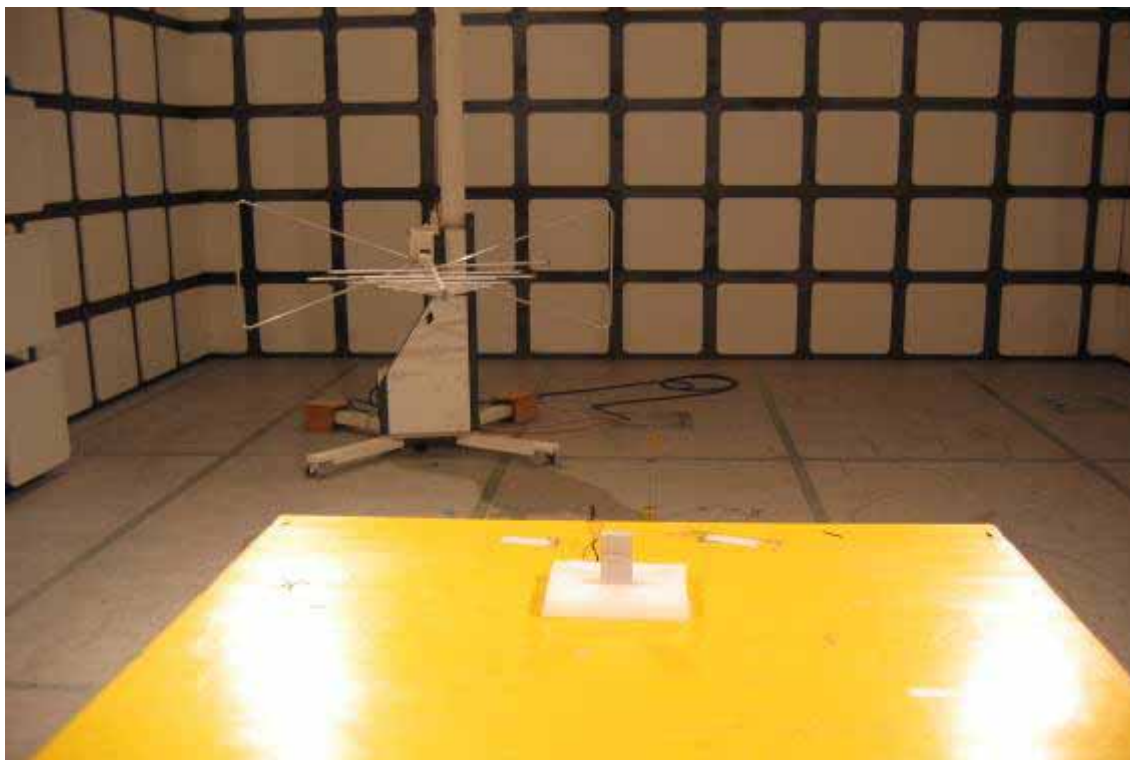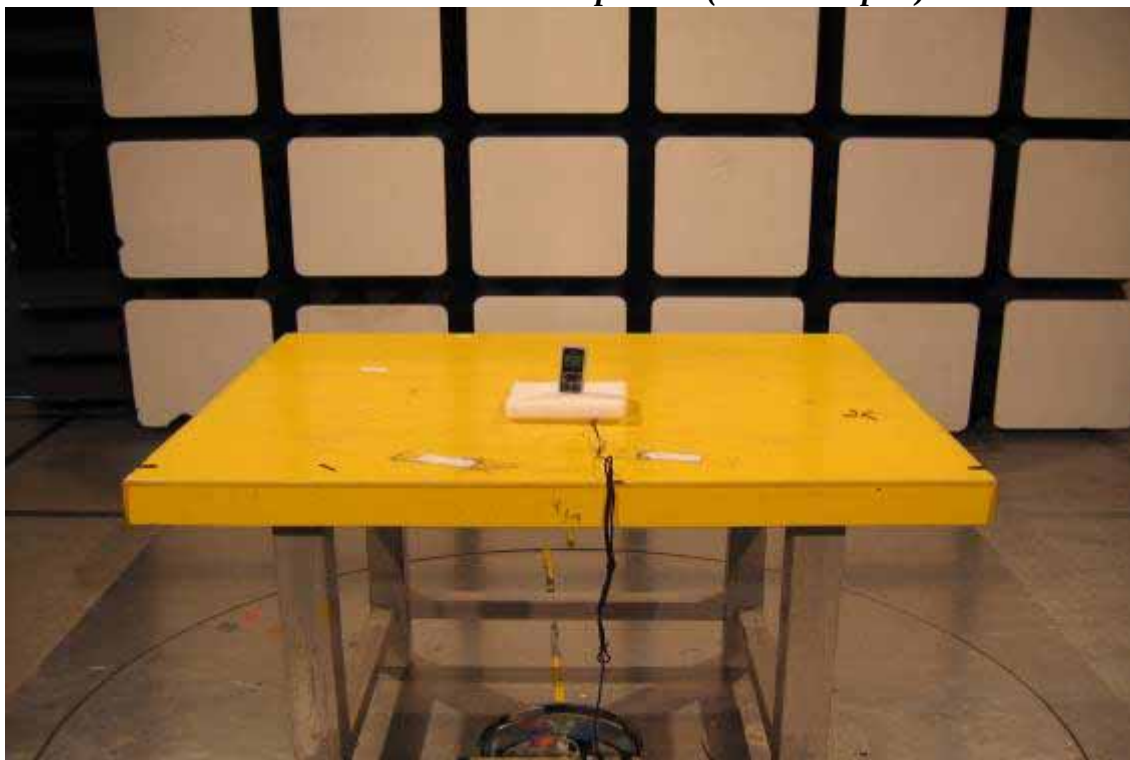



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Radiated Emission Test Setup Photo (Data Cable)

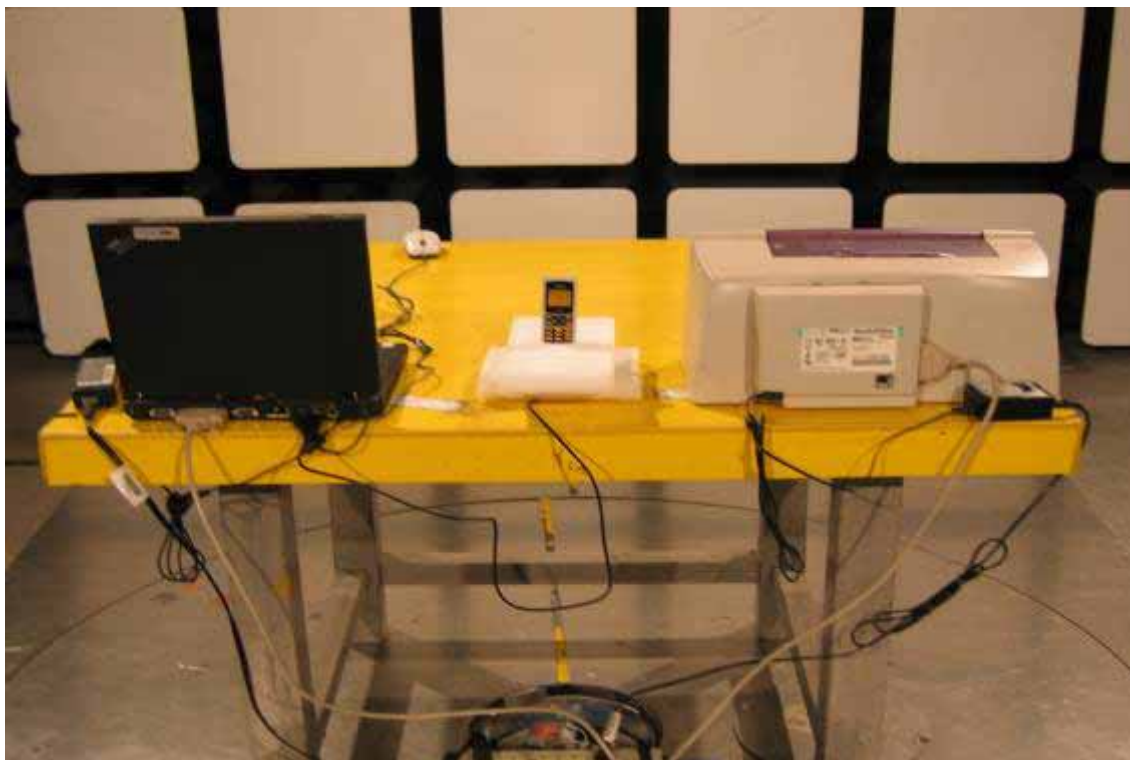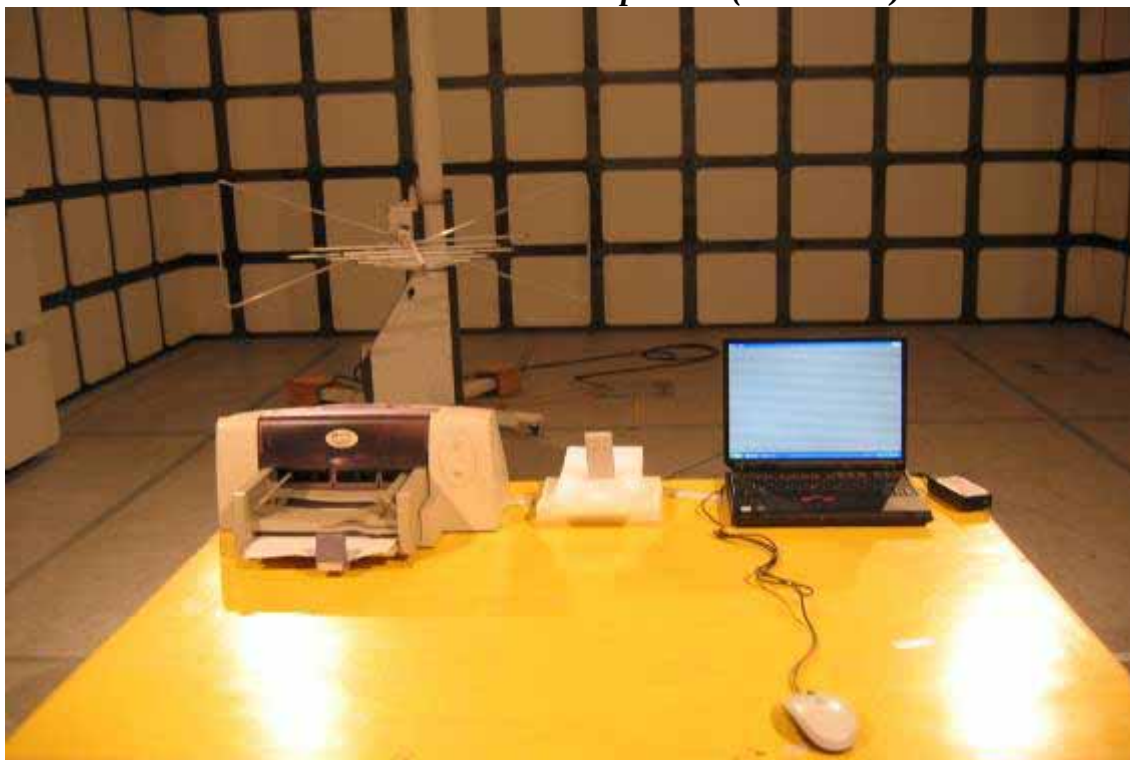

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Conducted Emission Test Setup Photo(Power Adaptor)

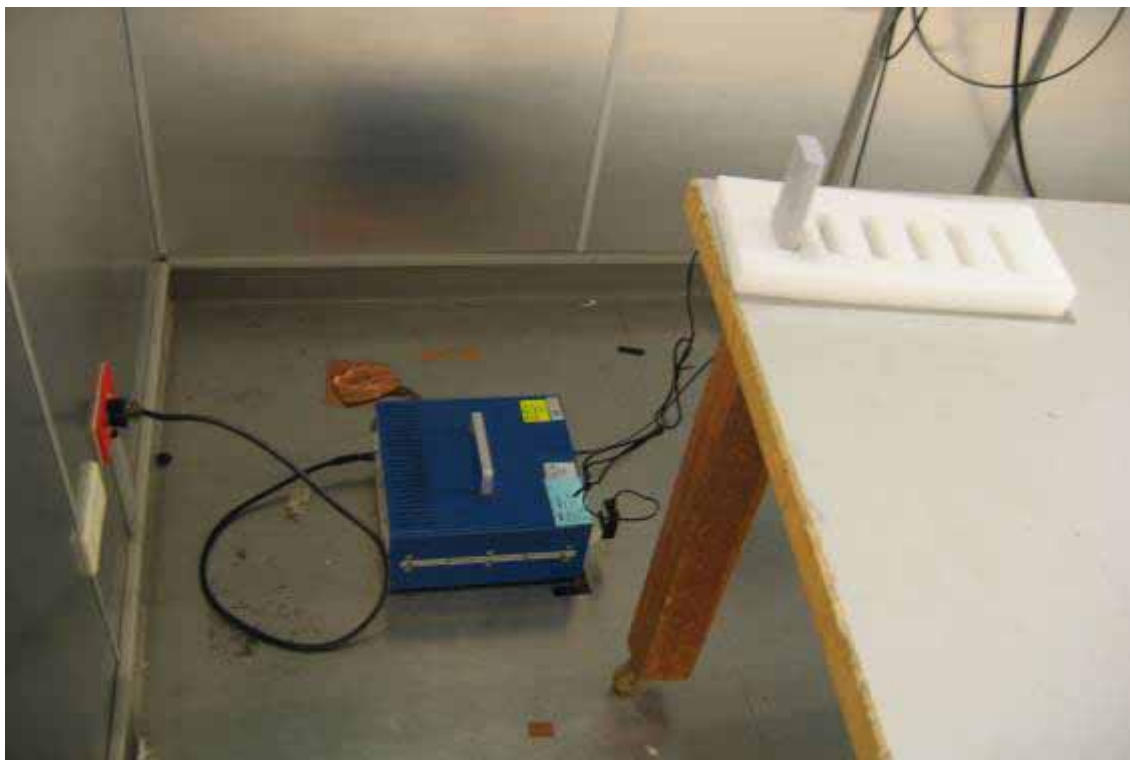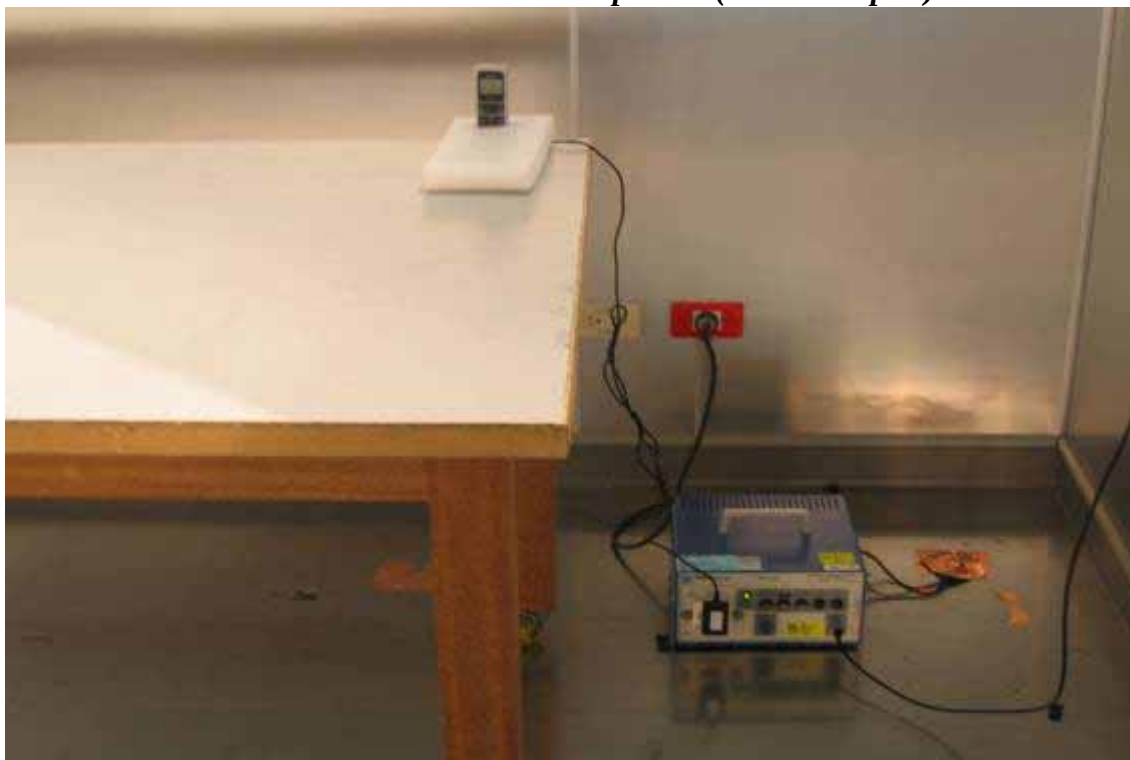

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

APPENDIX 2

PHOTOGRPHS OF EUT

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

All of EUT



Adapter(powersupply1 with 18 867 925-5)



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Adapter((powersupply2 with 18 865 855-8)



Adapter(powersupply3 with 18 865 853-7)



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Adapter(powersupply4 with 18 864 404-6)



Adapter(powersupply5 with 18 869 2000)



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Adapter(powersupply6 with 18 910 715-4)



Adapter(powersupply7 with 18 910 719-6)




The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Adapter(powersupply8 with 18 910 718-8)




Front View of EUT

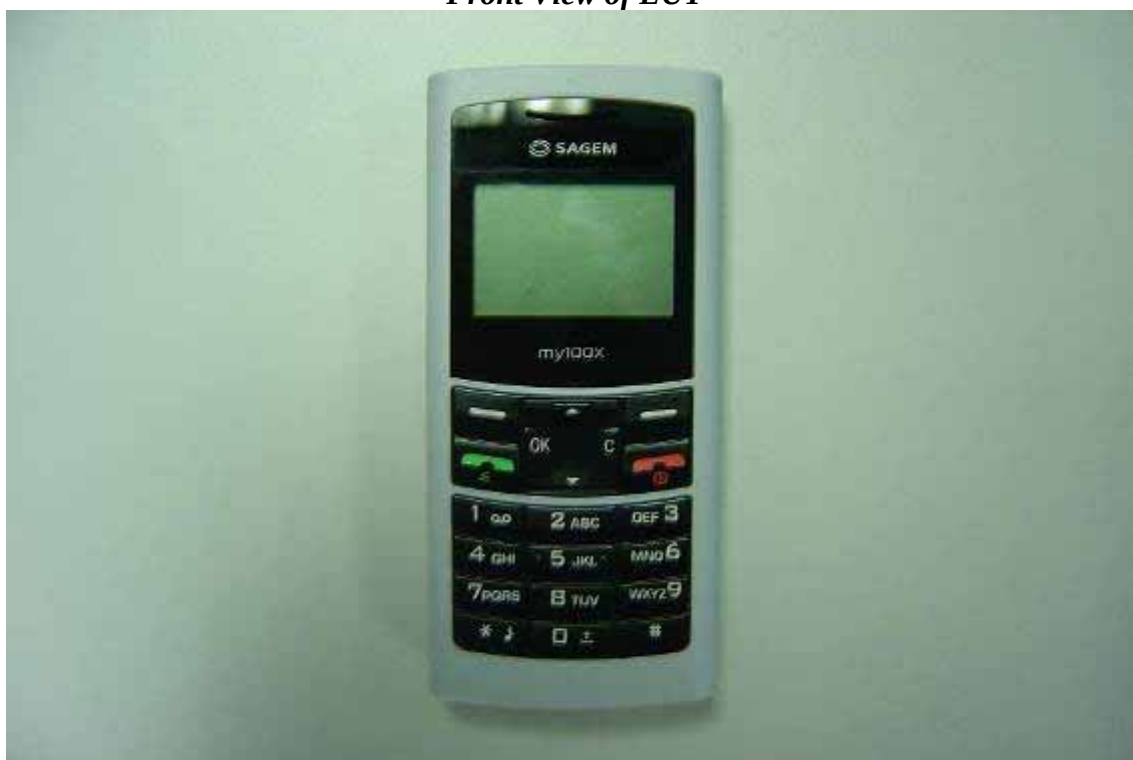

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Back View of EUT

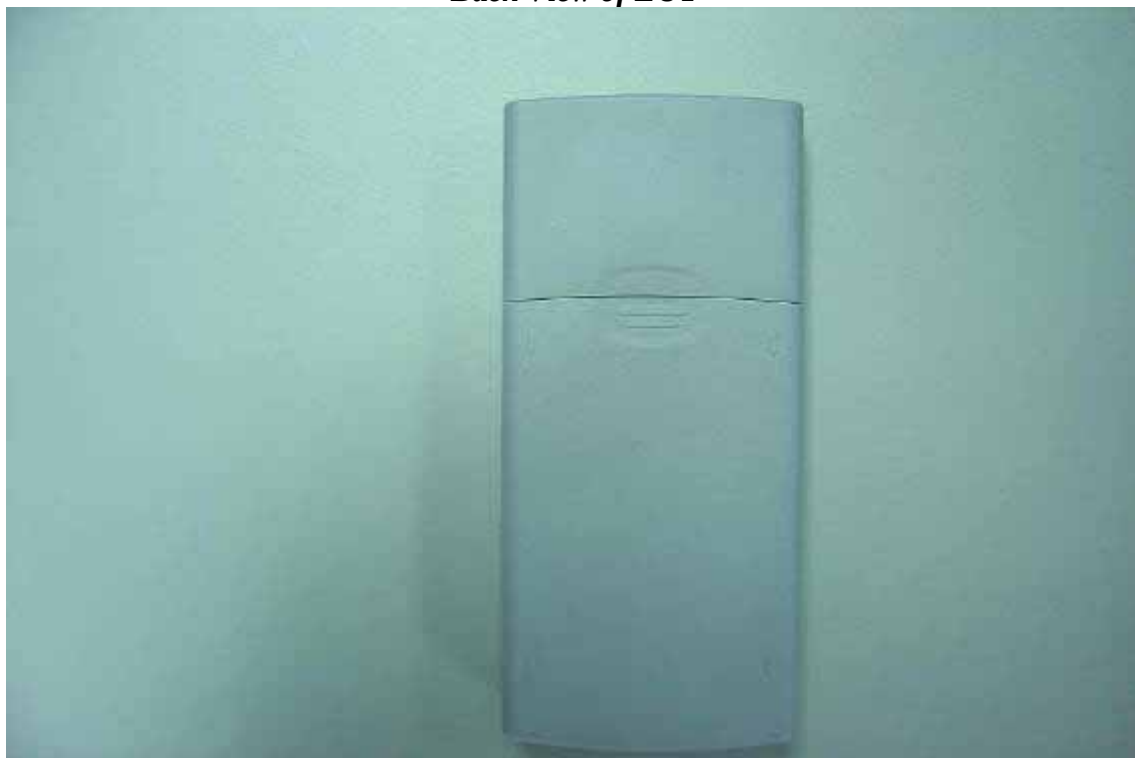

Left View of EUT



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Right View of EUT



Open View of EUT – 1



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Open View of EUT - 2



Internal of EUT --- 1



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Internal of EUT --- 2



Internal of EUT --- 3



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Internal of EUT --- 4




Internal of EUT --- 5



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Internal of EUT --- 6

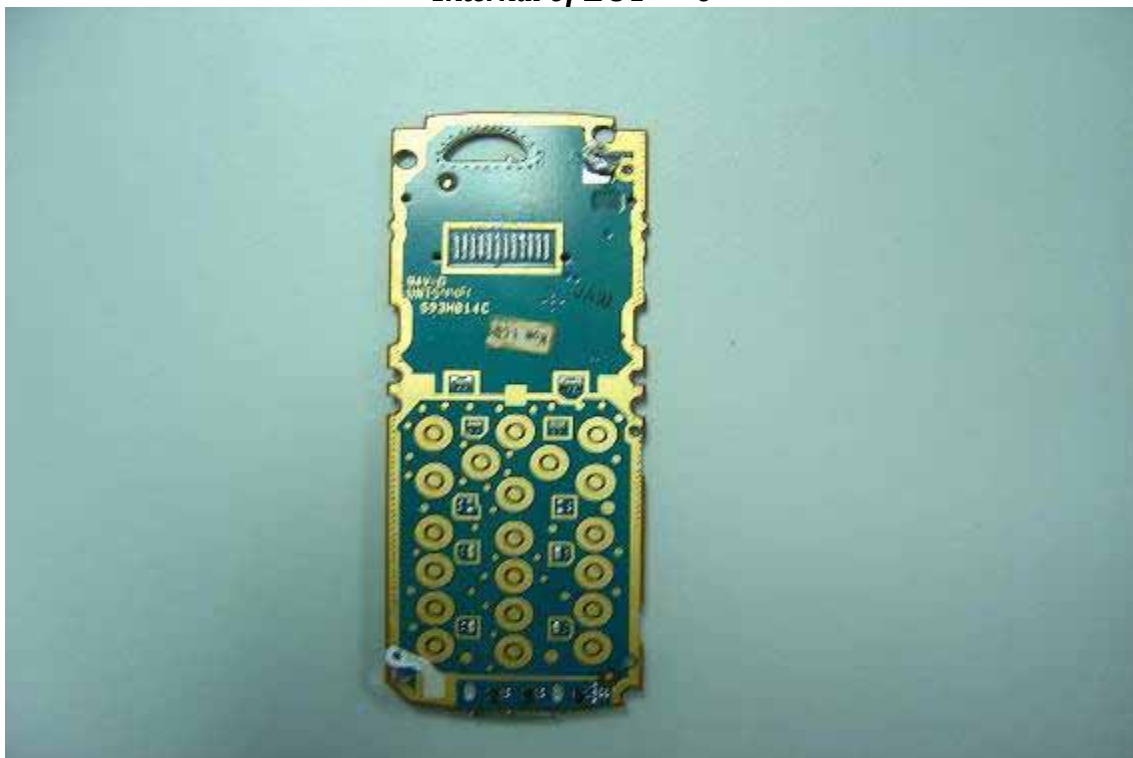

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

APPENDIX 3

LABELING REQUIREMENTS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

§15.19 Labeling requirements.

- (a) In addition to the requirements in part 2 of this chapter, a device subject to certification, or verification, or verification shall be labeled as follows:

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under part 73 of this chapter, land mobile operation under part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with the part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received including interference that may cause undesired operation.

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

- (b) Products subject to authorization under a Declaration of Conformity shall be labeled as follows:

- (1) The label shall be located in a conspicuous location on the device and shall contain the unique identification described in §2.1074 of this chapter and the following logo:

- (i) If the product is authorized based on testing of the product or system; or



The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

- (ii) If a personal computer is authorized based on assembly using separately authorized components, in accordance with §15.101(c) (2) or (c)(3), and the resulting product is not separately tested:



- (2) Label text information should be in a size of type large enough to be readily legible, consistent with the dimensions of the equipment and the label. However, the type size for the text is not required to be larger than eight points.
- (3) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (b)(1) of this section on it, such as for a CPU board or a plug-in circuit board peripheral device, the text associated with the logo may be placed in a prominent location in the instruction manual or pamphlet supplied to the user. However, the unique identification (trade name and model number) and the logo must be displayed on the device.
- (4) The label shall not be a stick-on, paper label. The label on these products shall be permanently affixed to the product and shall be readily visible to the purchaser at the time of purchase, as, described in §2.925(d) of this chapter. "Permanently affixed" means that the label is etched, engraved, stamped, silk screen, indelibly printed, or otherwise permanently marked on a permanently attached part of the equipment or on a nameplate of metal, plastic, or other material fastened to the equipment by welding, riveting, or a permanent adhesive. The label must be designed to last the expected lifetime of the equipment in the environment in which the equipment may be operated and must not be readily detachable.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.