

## Nemko Korea Co., Ltd.

159 Osan-ro, Mohyeon-myeon, Cheoin-gu, Yongin-si, Gyeonggi-do, 16885, Republic of Korea

TEL:+82 31 330 1700

FAX:+82 31 330 2332

### FCC and IC EVALUATION REPORT FOR CERTIFICATION

**Applicant :****Anam Electronics Co., Ltd.****27, Digital-ro 27ga-gil, Guro-gu, Seoul,  
08375, Republic of Korea.****Attn. : Byeong-Seob, Lee****Dates of Issue : September 05, 2017****Test Report No. : NK-17-R-186****Test Site : Nemko Korea Co., Ltd.****FCC  
IC****Brand Name****Contact Person****MBBDSB150BT  
11657A-DSB150BT****DENON****Anam Electronics Co., Ltd.  
27, Digital-ro 27ga-gil, Guro-gu, Seoul,  
08375, Republic of Korea.  
Byeong-Seob, Lee  
Telephone No. : +82-2-6424-4881**

Applied Standard: FCC 47 CFR Part 15.247 and IC RSS-247 Issue 2  
Classification: FCC Part 15 Spread Spectrum Transmitter (DSS)  
EUT Type: BT SPEAKER

The device bearing the brand name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Tested By : Seungyong Shin  
Engineer



Reviewed By : Deokha Ryu  
Technical Manager

# TABLE OF CONTENTS

---

|                                                 |           |
|-------------------------------------------------|-----------|
| <b>1. Scope</b>                                 | <b>4</b>  |
| <b>2. Introduction (Site Description)</b>       | <b>5</b>  |
| 2.1 Test facility                               | 5         |
| 2.2 Accreditation and listing                   | 6         |
| <b>3. Test Conditions &amp; EUT Information</b> | <b>7</b>  |
| 3.1 Operation During Test                       | 7         |
| 3.1.1 Table of test power setting               | 7         |
| 3.1.2 Table of test channels                    | 7         |
| 3.1.3 Antenna TX mode information               | 7         |
| 3.1.4 Additional Information Related to testing | 7         |
| 3.2 Support Equipment                           | 8         |
| 3.3 Setup Drawing                               | 8         |
| 3.4 EUT Information                             | 9         |
| <b>4. Summary of Test Results</b>               | <b>10</b> |
| <b>5. Recommendation / Conclusion</b>           | <b>11</b> |
| <b>6. Antenna Requirements</b>                  | <b>11</b> |
| <b>7. Description of Test</b>                   | <b>12</b> |
| 7.1 Radiated Emissions                          | 12        |
| 7.2 20 dB Bandwidth                             | 13        |
| 7.3 Carrier Frequency Separation                | 13        |
| 7.4 Transmitter Average Time of Occupancy       | 14        |
| 7.5 Number of Hopping Channels                  | 14        |
| 7.6 Maximum Peak Output Power                   | 15        |
| 7.7 Conducted Spurious Emissions                | 15        |

|           |                                       |           |
|-----------|---------------------------------------|-----------|
| <b>8.</b> | <b>Test Data</b>                      | <b>16</b> |
| 8.1       | Radiated Emissions                    | 16        |
| 8.2       | 20 dB Modulated Bandwidth             | 18        |
| 8.3       | Carrier Frequency Separation          | 24        |
| 8.4       | Transmitter Average Time of Occupancy | 27        |
| 8.5       | Number of Hopping Channels            | 29        |
| 8.6       | Peak Output Power and E.I.R.P         | 30        |
| 8.7       | Conducted Spurious Emissions          | 36        |
| 8.8       | Radiated Spurious Emissions           | 45        |
| 8.9       | Radiated Bandedge                     | 49        |
| <b>9.</b> | <b>Test Equipment</b>                 | <b>51</b> |
| <b>10</b> | <b>Accuracy of Measurement</b>        | <b>52</b> |

## 1. SCOPE

---

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 15 and IC RSS-247 Issue2.

|                            |                                                                                                                 |
|----------------------------|-----------------------------------------------------------------------------------------------------------------|
| <b>Responsible Party :</b> | Anam Electronics Co., Ltd.<br>27, Digital-ro 27ga-gil, Guro-gu, Seoul, 08375, Republic of Korea                 |
| <b>Contact Person :</b>    | Byeong Seob, Lee                                                                                                |
| <b>Manufacturer :</b>      | D&M HOLDINGS INC.<br>D&M Building, 2-1 Nisshin-cho, Kawasaki-ku, Kawasaki-shi,<br>Kanagawa-ken, 210-8569, JAPAN |

- FCC ID MBBDSB150BT
- IC : 11657A-DSB150BT
- Model: DSB150BT
- HVIN DSB150BT
- Brand Name: DENON
- EUT Type: BT SPEAKER
- Classification: Part 15 Spread Spectrum Transmitter (DSS)
- Applied Standard: FCC 47 CFR Part 15 subpart C and IC RSS-247 Issue 2
- Test Procedure(s): ANSI C63.10-2013
- Dates of Test: August 11, 2017 ~ September 04, 2017
- Place of Tests: Nemko Korea Co., Ltd.

## 2. INTRODUCTION

### 2.1 Test facility

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2014), the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013) was used in determining radiated and conducted emissions emanating from **Anam Electronics Co., Ltd. FCC ID : MBBDSB150BT** and **IC : 11657A-DSB150BT**.

These measurement tests were conducted at **Nemko Korea Co., Ltd. EMC Laboratory**.

The site address 159, Osan-ro, Mohyeon-myeon, Cheoin-gu, Yongin-si, Gyeonggi-do, 16885, Republic of Korea.

The area of Nemko Korea Corporation Ltd. EMC Test Site is located in a mountain area at 80 km (48 miles) southeast and Incheon International Airport (Incheon Airport), 30 km (18miles) south-southeast from central Seoul.

It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures.

The detailed description of the measurement facility was found to be in compliance with the requirements of ANSI C63.4-2014 according to §2.948.



Nemko Korea Co., Ltd.  
EMC Lab.  
159, Osan-ro, Mohyeon-myeon,  
Cheoin-gu, Yongin-si, Gyeonggi-do,  
16885, Republic of Korea.  
Tel)+82-31-330-1700  
Fax)+82-31-322-2332

Fig. 1. The map above shows the Seoul in Korea vicinity area.

The map also shows Nemko Korea Corporation Ltd. EMC Lab. and Incheon Airport.

## 2.2 Accreditation and listing

| Accreditation type                                                                 |                                                                  | Accreditation number    |
|------------------------------------------------------------------------------------|------------------------------------------------------------------|-------------------------|
|   | CAB Accreditation for DOC                                        | Designation No. KR0026  |
|   | KOLAS Accredited Lab.<br>(Korea Laboratory Accreditation Scheme) | Registration No. 155    |
|   | Canada IC Registered site                                        | Site No. 2040E          |
|   | VCCI registration site(RE/CE/Telecom CE)                         | Member No. 2118         |
|   | EMC CBTL                                                         | -                       |
|  | KCC(RRL)Designated Lab.                                          | Registration No. KR0026 |

### 3. TEST CONDITIONS & EUT INFORMATION

#### 3.1 Operation During Test

The EUT is the transceiver which is the Bluetooth 4.2 module supporting BDR/EDR/LE mode. The Laptop was used to control the EUT to transmit the wanted TX channel by the testing program (Bluetest) which manufacturer supported. The Laptop was removed after controlling the EUT to transmit the wanted signal. The EUT was tested at the lowest channel, middle channel and the highest channel with the maximum output power in accordance with the manufacturer's specifications. The worst data were recorded in the report.

##### 3.1.1 Table of test power setting

| Mode                             | Frequency Band      | Power Setting Level |     |
|----------------------------------|---------------------|---------------------|-----|
| GFSK/<br>$\pi/4$ DQPSK/<br>8DPSK | 2402 MHz ~ 2480 MHz | Ext. Power          | 255 |
|                                  |                     | Int. Power          | 50  |

##### 3.1.2 Table of test channels

| Frequency band | Mode                       | Test Channel (CH) | Frequency (MHz) |
|----------------|----------------------------|-------------------|-----------------|
| 2.4 GHz        | GFSK, $\pi/4$ DQPSK, 8DPSK | 0                 | 2402            |
|                |                            | 39                | 2441            |
|                |                            | 78                | 2480            |

##### 3.1.3 Antenna TX mode information

| Frequency band | Mode                       | Antenna TX mode                                                       | Support MIMO                                                         |
|----------------|----------------------------|-----------------------------------------------------------------------|----------------------------------------------------------------------|
| 2.4 GHz        | GFSK, $\pi/4$ DQPSK, 8DPSK | <input checked="" type="checkbox"/> 1TX, <input type="checkbox"/> 2TX | <input type="checkbox"/> Yes, <input checked="" type="checkbox"/> No |


##### 3.1.4. Additional Information Related to Testing

The cable and attenuator loss from 30MHz to 26.5GHz was reflected in spectrum analyzer with correction factor for all conducted testing.

### 3.2 Support Equipment

|                 |                                                               |                                    |
|-----------------|---------------------------------------------------------------|------------------------------------|
| EUT             | Anam Electronics Co., Ltd.<br>Model : DSB150BT                | S/N: N/A                           |
| Laptop Computer | HP<br>Model : G62-355TU<br>1.5 m shielded pin connector cable | FCC DOC<br>S/N : CNF0489WDT        |
| AC/DC Adapter   | HP<br>Model : PPP009D<br>1.5 m unshielded power cable         | FCC DOC<br>S/N :<br>WBGSV0ACXZH162 |

### 3.3 Setup Drawing

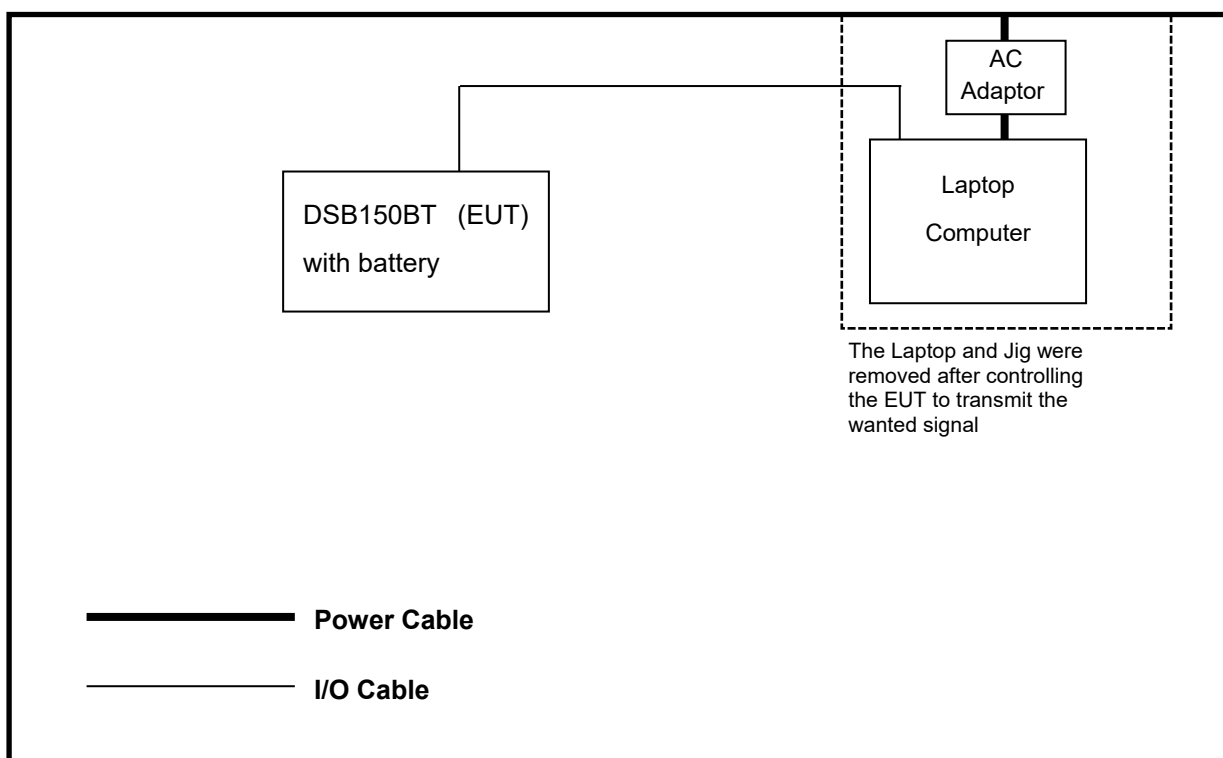

### 3.4 EUT Information

The EUT is the **Anam BT SPEAKER FCC ID: MBBDSB150BT, IC: 11657A-DSB150BT.**

This unit supports full qualified Bluetooth 4.2 with EDR standard system.

#### Specifications:

|                                               |                                                                |
|-----------------------------------------------|----------------------------------------------------------------|
| EUT Type                                      | BT SPEAKER                                                     |
| Model Name                                    | DSB150BT                                                       |
| Brand Name                                    | DENON                                                          |
| RF Frequency                                  | 2402 MHz ~ 2480 MHz                                            |
| Peak Power Output (Conducted)                 | 8.53 dBm                                                       |
| FCC Classification                            | FCC Part 15 Spread Spectrum Transmitter (DSS)                  |
| Method/System                                 | Frequency Hopping Spread Spectrum (FHSS)                       |
| Channel Number                                | 79 ch                                                          |
| Modulations                                   | GFSK, $\pi/4$ DQPSK, 8DPSK                                     |
| Antenna Gain (peak)                           | 2.61 dBi                                                       |
| Antenna Setup                                 | 1TX / 1RX                                                      |
| Voltage                                       | Operating Voltage : 3.7Vdc (Battery)<br>Test Voltage : 3.7 Vdc |
| Temperature Range                             | -10°C ~ +50 °C                                                 |
| Size (H x W x D)                              | About 6.4 mm x 18.9 mm x 6.0 mm                                |
| Weight                                        | About 536 g                                                    |
| HVIN (Hardware version number)                | DSB150BT                                                       |
| FVIN (Firmware Version Identification Number) | FWV042                                                         |
| Remarks                                       | -                                                              |

## 4. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specification:

| Name of Test                          | FCC Paragraph No. | IC Paragraph No.       | Result   | Remark |
|---------------------------------------|-------------------|------------------------|----------|--------|
| Radiated Emission                     | 15.209            | RSS-GEN Issue 4<br>8.9 | Complies |        |
| 20dB Bandwidth                        | 15.247(a)(1)      | RSS-247 Issue 2<br>5.1 | Complies |        |
| Carrier Frequency Separation          | 15.247(a)(1)      | RSS-247 Issue 2<br>5.1 | Complies |        |
| Transmitter Average Time of Occupancy | 15.247(a)(1)(iii) | RSS-247 Issue 2<br>5.1 | Complies |        |
| Peak Output Power and E.I.R.P         | 15.247(b)(1)      | RSS-247 Issue 2<br>5.4 | Complies |        |
| Conducted Spurious Emission           | 15.247(d)         | RSS-247 Issue 2<br>5.5 | Complies |        |
| Radiated Spurious Emission            | 15.247(d)         | RSS-247 Issue 2<br>5.5 | Complies |        |
| Number of Hopping channels            | 15.247(a)(1)(iii) | RSS-247 Issue 2<br>5.1 | Complies |        |

## 5. RECOMMENDATION/CONCLUSION

---

The data collected shows that the **Anam BT SPEAKER FCC ID: MBBDSB150BT, IC: 11657A-DSB150BT** is in compliance with Part 15.247 of the FCC Rule and RSS-247 Issue 2 of the IC specification.

## 6. ANTENNA REQUIREMENTS

---

### §15.203 of the FCC Rules part 15 Subpart C

: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The antenna of the **Anam BT SPEAKER FCC ID: MBBDSB150BT, IC: 11657A-DSB150BT** is **permanently attached** and there are no provisions for connection to an external antenna. It complies with the requirement of §15.203.

## 7. DESCRIPTION OF TESTS

### 7.1 Radiated Emissions

The measurement was performed at the test site that is specified in accordance with ANSI C63.10-2013.

The spurious emission was scanned from 9 kHz to 30 MHz using Loop Antenna(Rohde&Schwarz, HFH2-Z2) and 30 to 1000 MHz using Trilog broadband test antenna(Schwarzbeck, VULB 9163). Above 1 GHz, Horn antenna (Schwarzbeck BBHA 9120D: up to 18 GHz, Q-par Angus QSH20S20 : 18 to 26.5 GHz, QSH22K20: up to 40 GHz) was used.

For emissions testing at below 1GHz, The test equipment was placed on turntable with 0.8 m above ground. For emission measurements above 1 GHz, The test equipment was placed on turntable with 1.5 m above ground. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The EUT, cable, wire arrangement and mode of operation that has the highest amplitude relative to the limit was selected. Then, the turn table was rotated from 0° to 360° and an antenna mast was moved from 1 m to 4 m height to maximize the suspected highest amplitude signal. The final maximized level was recorded.


At frequencies below 1000 MHz, measurements performed using the CISPR quasi-peak detection. At frequencies above 1000 MHz, measurements performed using the peak and average measurement procedures described in ANSI C63.10-2013. Peak emission levels were measured by setting the analyzer RBW = 1 MHz, VBW = 3 MHz, Detector = Peak, Trace mode = max hold. Average emission levels were measured by setting the analyzer RBW = 1 MHz, VBW = 1 kHz, Detector = Peak, Trace mode = max hold.

| Frequency (MHz) | Field strength<br>(microvolts/meter) | Measurement distance (meters) |
|-----------------|--------------------------------------|-------------------------------|
| 0.009–0.490     | 2400/F(kHz)                          | 300                           |
| 0.490–1.705     | 24000/F(kHz)                         | 30                            |
| 1.705–30.0      | 30                                   | 30                            |
| 30–88           | 100                                  | 3                             |
| 88–216          | 150                                  | 3                             |
| 216–960         | 200                                  | 3                             |
| Above 960       | 500                                  | 3                             |

Radiated Emissions Limits per 47 CFR 15.209(a) and RSS-GEN Issue 4 8.9

## **7.2 20 dB Bandwidth**

### **Test Setup**



### **Test Procedure**

The transmitter is set to the Low, Middle, High channels is connected to the spectrum analyzer.

Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel

RBW = 1% to 5% of the OBW

VBW = approximately 3 x RBW


Sweep = auto

Detector function = peak

Trace = max hold

## **7.3 Carrier Frequency Separation**

### **Test Setup**



### **Test Procedure**

The EUT must have its hopping function enabled. The following spectrum analyzer setting is used.

Span = wide enough to capture the peaks of two adjacent channels

RBW  $\geq$  approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel

VBW  $\geq$  RBW

Sweep = auto


Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

## **7.4 Transmitter Average Time of Occupancy**

### **Test Setup**



### **Test Procedure**

The transmitter output is connected to a spectrum analyzer. The following spectrum analyzer setting is used.

Span = Zero span, centered on a hopping channel

RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\gg 1/T$ , where  $T$  is the expected dwell time per channel.

VBW  $\geq$  RBW

Sweep = as necessary to capture the entire dwell time per hopping channel


Detector function = Peak

Trace = Single sweep

Use the marker-delta function to determine the width of pulse

## **7.5 Number of Hopping Channels**

### **Test Setup**



### **Test Procedure**

Span = The frequency band of operation.

RBW = less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW  $\geq$  RBW


Sweep = Auto

Detector function = Peak

Trace = Max hold

## **7.6 Peak Output Power**

### **Test Setup**



### **Test Procedure**

The transmitter is set to the Low, Middle, High channels is connected to the spectrum analyzer.

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > 20 dB bandwidth of the emission being measured

VBW  $\geq$  RBW


Sweep = auto

Detector function = peak

Trace = max hold

## **7.7 Conducted Spurious Emission**

### **Test Setup**



### **Test Procedure**

Measurements are made over the 30 MHz to 26.5 GHz range with the transmitter set to the Lowest, middle and highest channels.

RBW = 100kHz

VBW = 300kHz

Sweep = auto

Detector function = peak

Trace = max hold

## 8. TEST DATA

### 8.1 Radiated Emissions

#### FCC §15.209, IC RSS-GEN Issue 4 8.9

#### Result

| Frequency<br>(MHz) | Reading<br>(dB $\mu$ V/m) | Pol*<br>(H/V) | Antenna Heights<br>(cm) | Turntable<br>Angles (°) | AF+CL+Amp<br>(dB)** | Result<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
|--------------------|---------------------------|---------------|-------------------------|-------------------------|---------------------|--------------------------|-------------------------|----------------|
| 135.15             | 50.60                     | H             | 170                     | 165                     | -27.0               | 23.6                     | 43.5                    | 19.9           |
| 159.74             | 56.60                     | H             | 185                     | 153                     | -26.7               | 29.9                     | 43.5                    | 13.6           |
| 172.01             | 52.10                     | H             | 170                     | 158                     | -26.0               | 26.1                     | 43.5                    | 17.4           |
| 184.33             | 63.40                     | H             | 170                     | 165                     | -25.4               | 38.0                     | 43.5                    | 5.5            |
| 196.60             | 50.10                     | H             | 170                     | 172                     | -24.7               | 25.4                     | 43.5                    | 18.1           |
| 208.87             | 45.90                     | H             | 170                     | 30                      | -24.1               | 21.8                     | 43.5                    | 21.7           |
| 349.28             | 49.20                     | H             | 100                     | 26                      | -18.6               | 30.6                     | 46.0                    | 15.4           |

#### Radiated Measurements at 3 meters

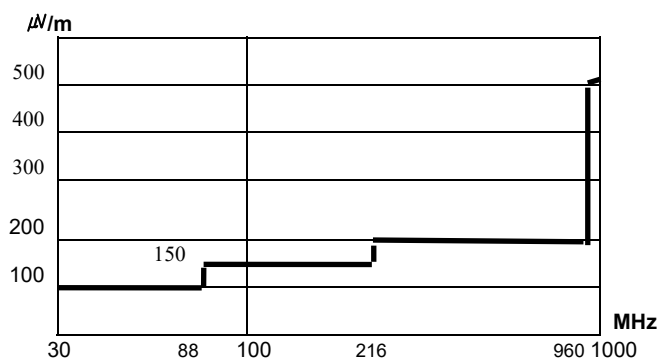



Fig. 3. Limits at 3 meters

#### Notes:

1. All modes were measured and the worst-case emission was reported.
2. The radiated limits are shown on Figure 3. Above 1GHz the limit is 500  $\mu$ V/m.
3. \*Pol. H = Horizontal, V = Vertical
4. \*\*AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
5. Measurements using CISPR quasi-peak mode below 1 GHz.
6. The radiated emissions testing were made by rotating the receive antenna with horizontal, Vertical polarization. The worst date was recorded.
7. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

# PLOTS OF EMISSIONS

## Worst Case : 2480 MHz (below 1GHz) GFSK modulation

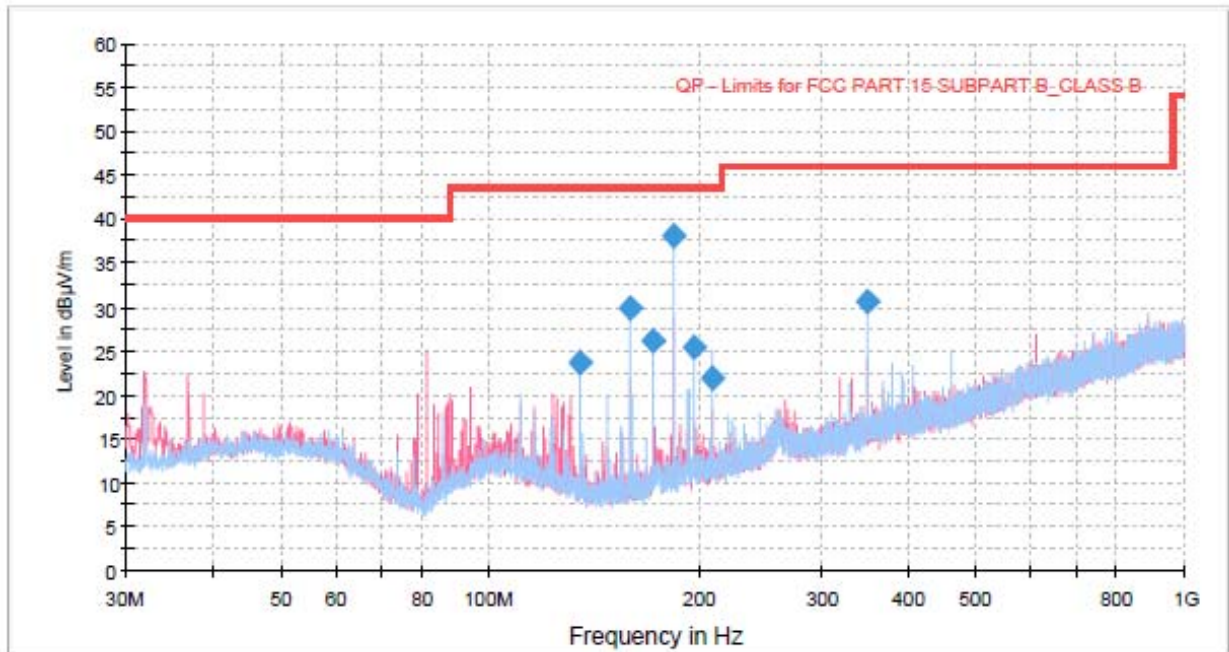

## TEST DATA

### 8.2 20 dB Modulated Bandwidth

FCC §15.247(a)(1)(iii), IC RSS-247 Issue 2, 5.1


Test Mode : Set to Lowest channel, Middle channel and Highest channel

#### Result


| Modulation Mode | Frequency (MHz) | Result (kHz) | Limit (kHz)   |
|-----------------|-----------------|--------------|---------------|
| GFSK            | 2402            | 942.2        | Non specified |
| GFSK            | 2441            | 937.2        | Non specified |
| GFSK            | 2480            | 942.4        | Non specified |
| $\pi/4$ DQPSK   | 2402            | 1226.0       | Non specified |
| $\pi/4$ DQPSK   | 2441            | 1229.0       | Non specified |
| $\pi/4$ DQPSK   | 2480            | 1230.0       | Non specified |
| 8DPSK           | 2402            | 1257.0       | Non specified |
| 8DPSK           | 2441            | 1259.0       | Non specified |
| 8DPSK           | 2480            | 1263.0       | Non specified |

# PLOTS OF EMISSIONS

## 20 dB Bandwidth, Lowest Channel (2402 MHz, GFSK Mode)

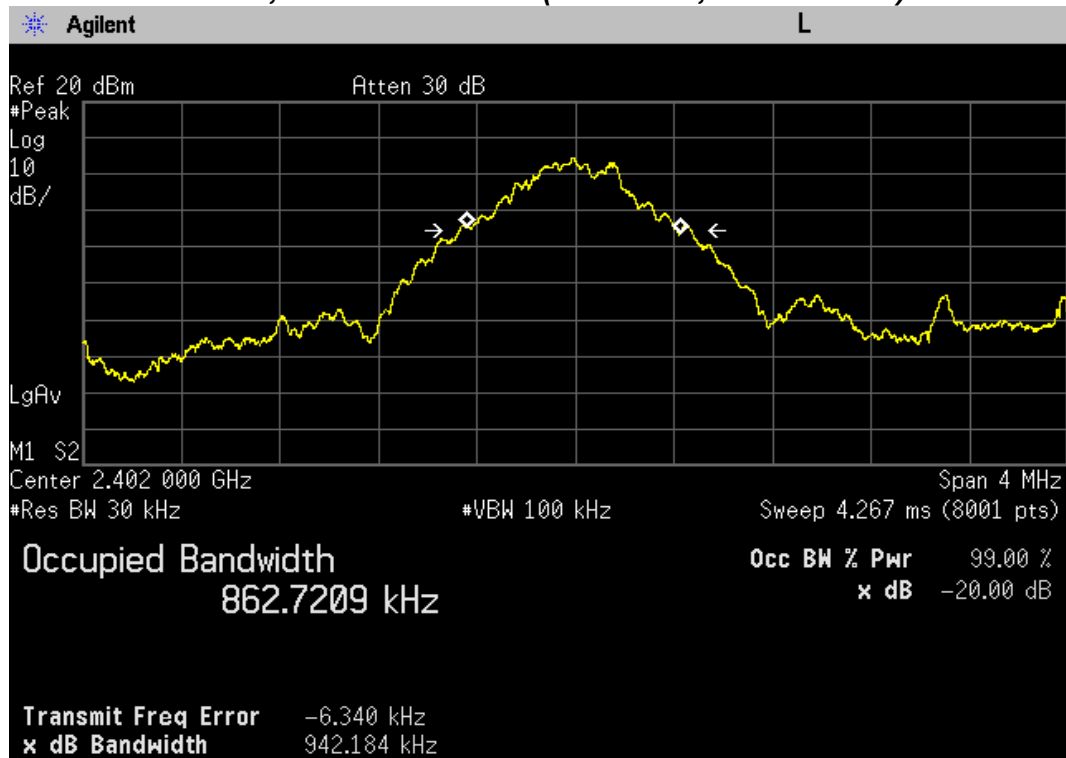


## 20 dB Bandwidth, Middle Channel (2441 MHz, GFSK Mode)

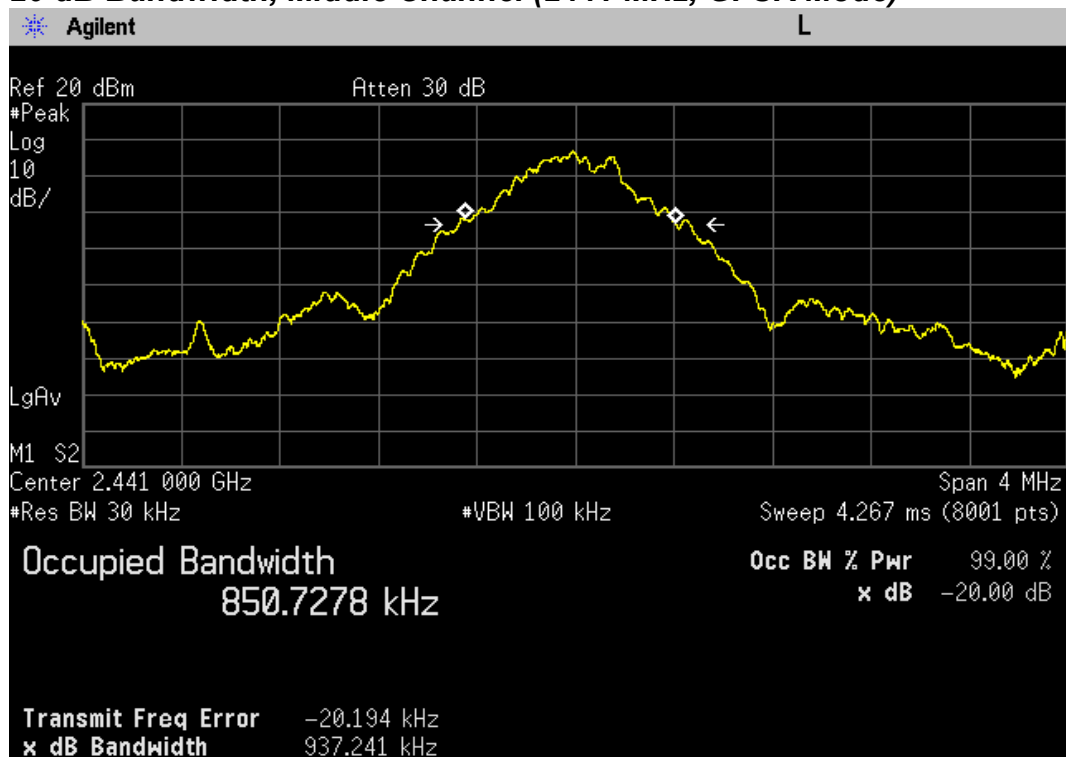


# PLOTS OF EMISSIONS

## 20 dB Bandwidth, Highest Channel (2480 MHz, GFSK Mode)

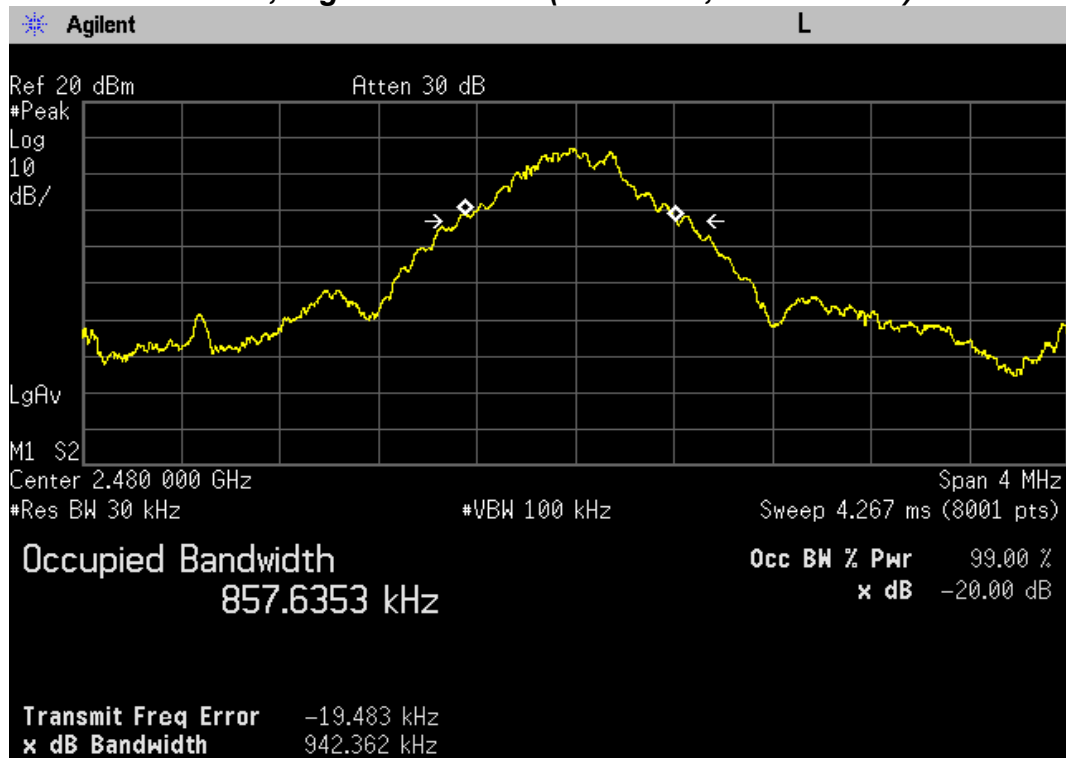


## 20 dB Bandwidth, Lowest Channel (2402 MHz, $\pi/4$ DQPSK Mode)

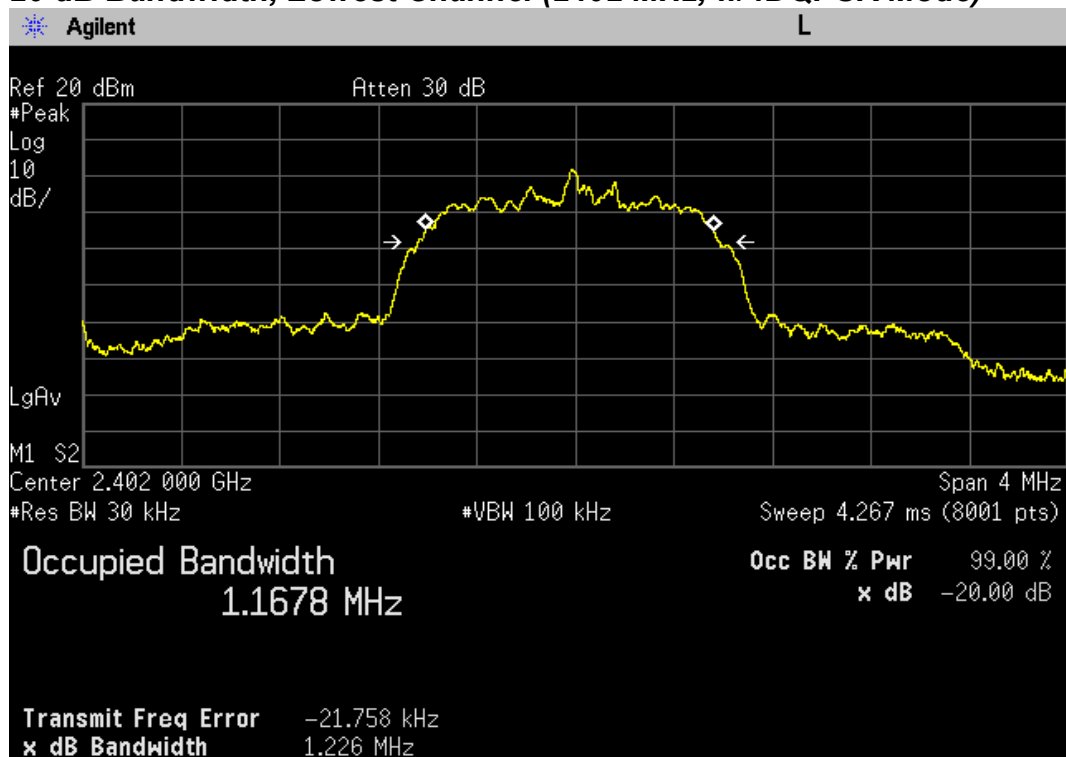


# PLOTS OF EMISSIONS

## 20 dB Bandwidth, Middle Channel (2441 MHz, $\pi/4$ DQPSK Mode)

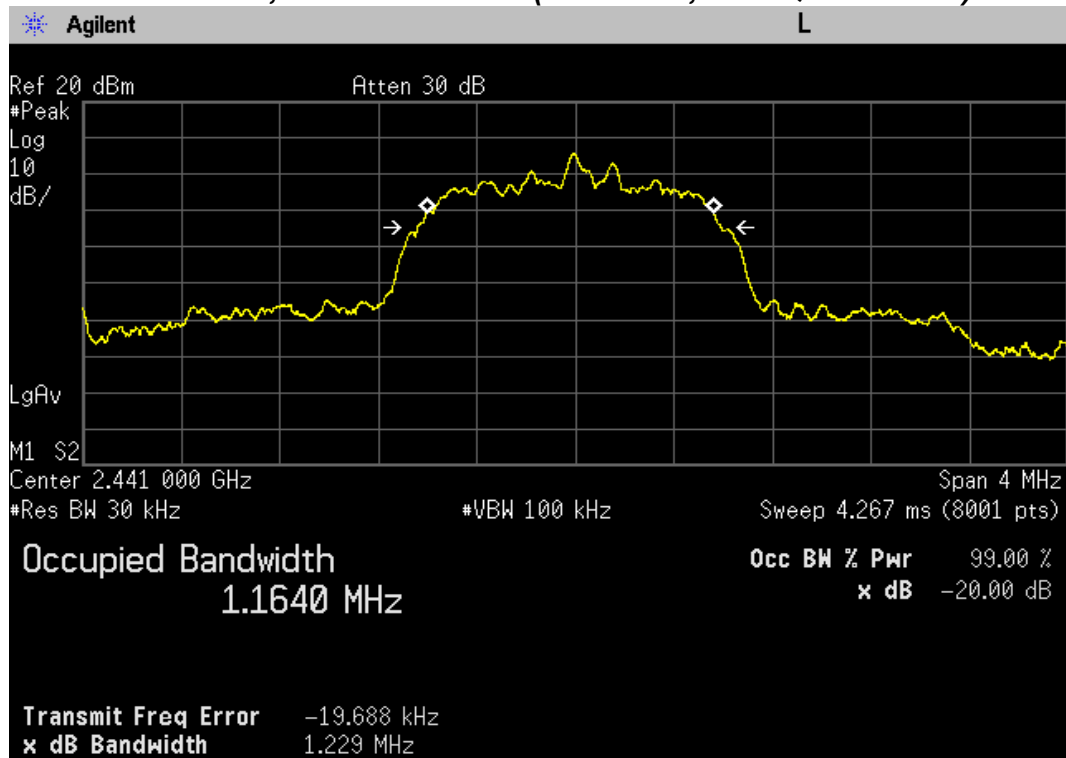


## 20 dB Bandwidth, Highest Channel (2480 MHz, $\pi/4$ DQPSK Mode)

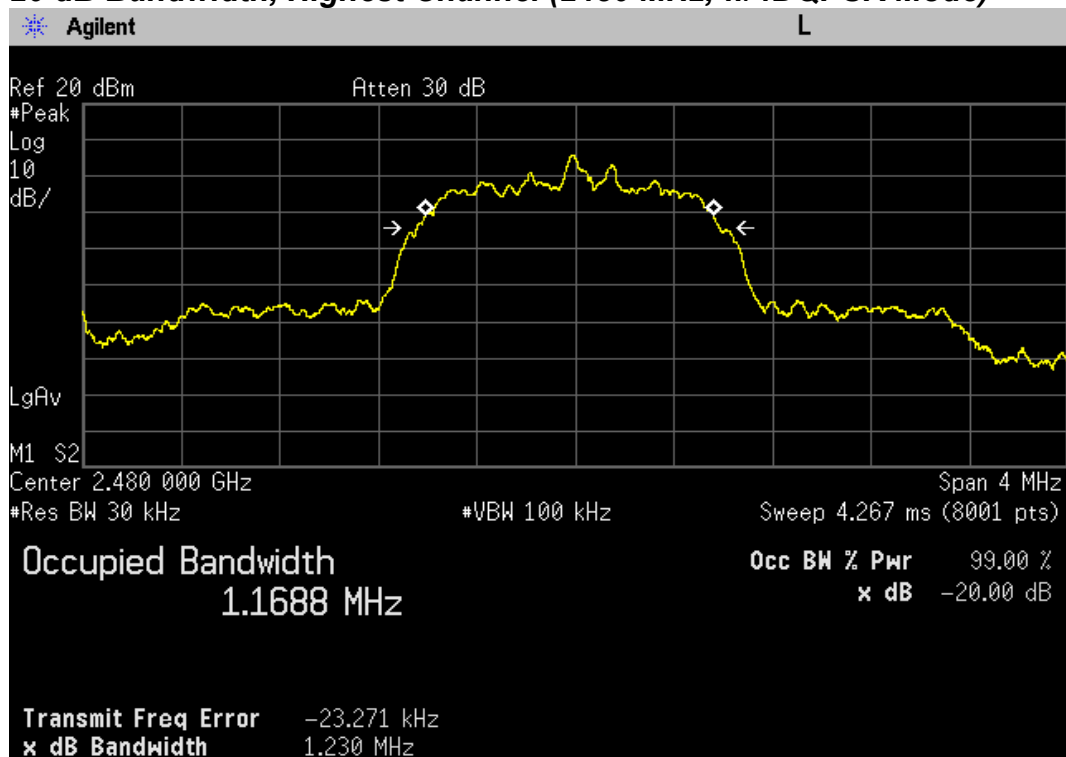


# PLOTS OF EMISSIONS

## 20 dB Bandwidth, Lowest Channel (2402 MHz, 8DPSK Mode)

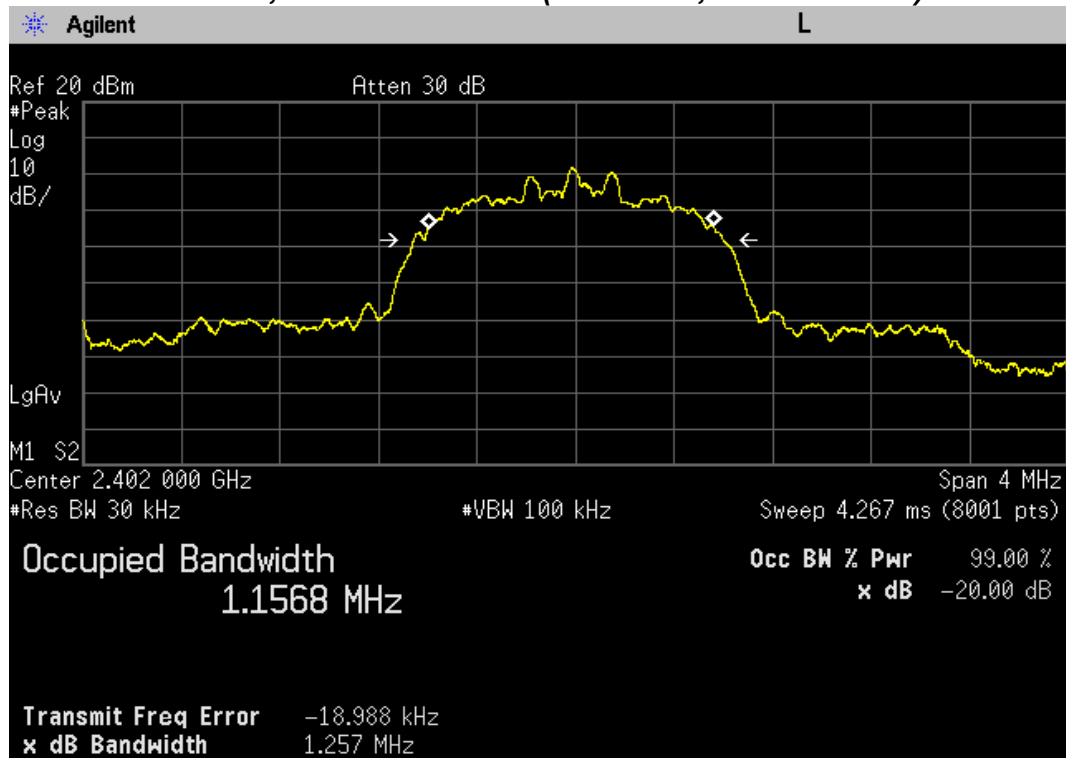


## 20 dB Bandwidth, Middle Channel (2441 MHz, 8DPSK Mode)

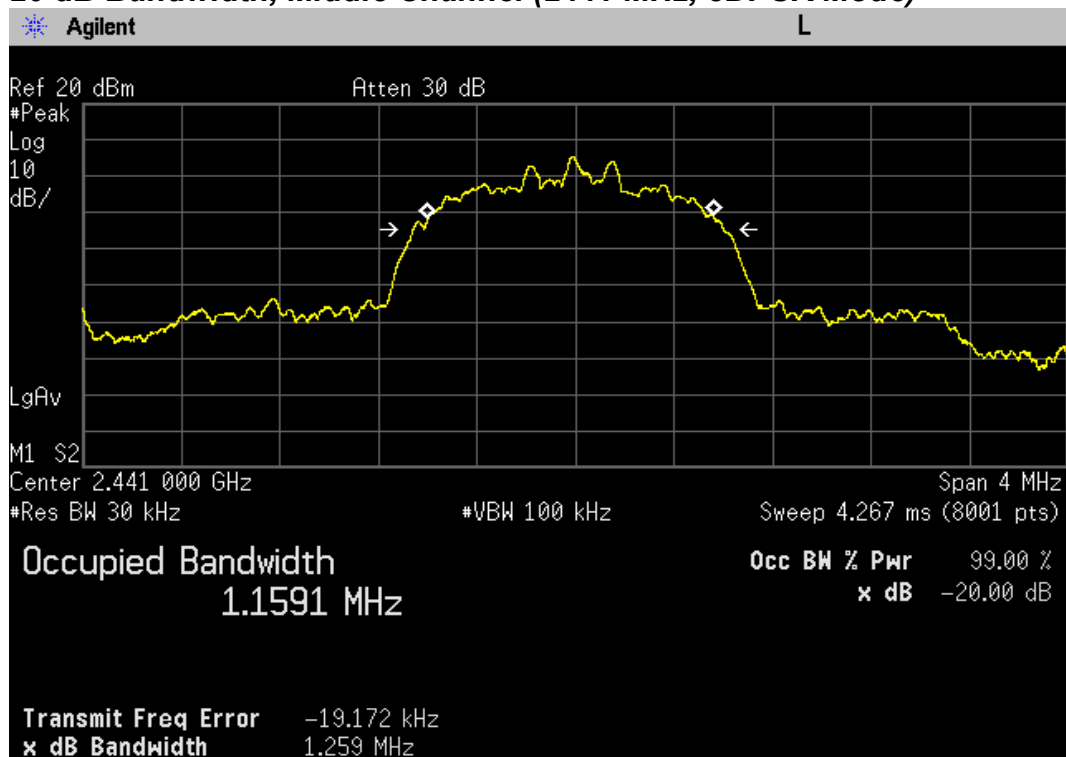

## PLOTS OF EMISSIONS

### 20 dB Bandwidth, Highest Channel (2480 MHz, 8DPSK Mode)

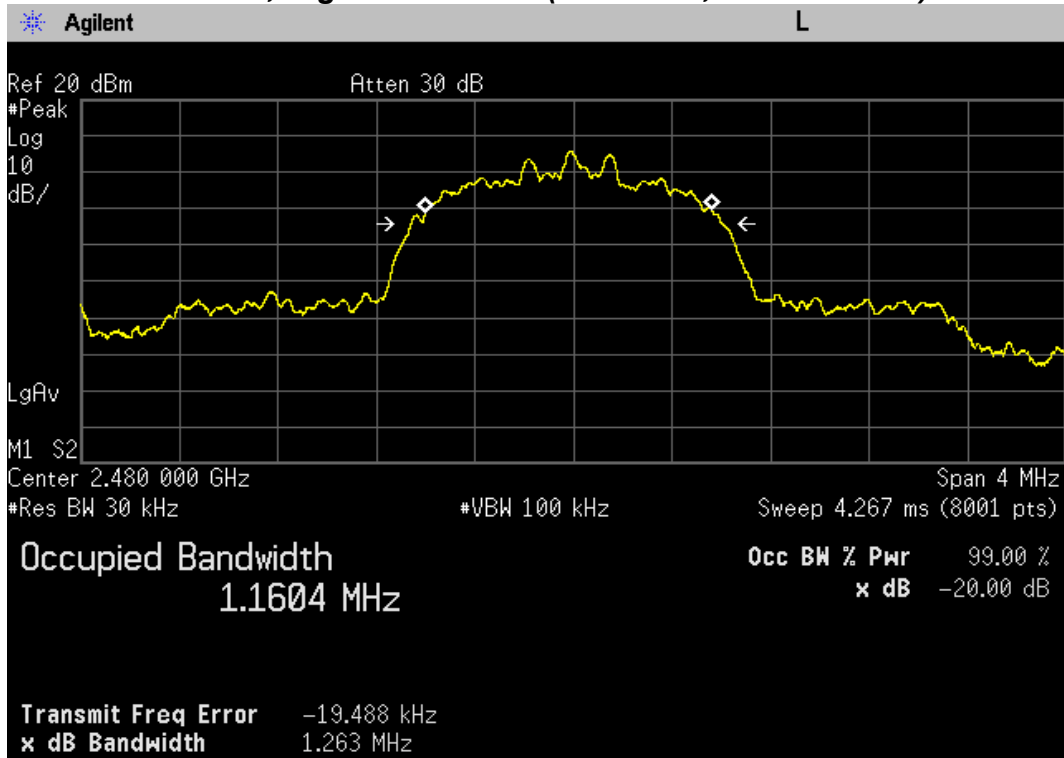

## TEST DATA

### 8.3 Carrier Frequency Separation

FCC §15.247(a)(1), IC RSS-247 Issue 2, 5.1

Test Mode : Set to Hopping mode

#### Result


| Modulation Mode | Carrier Frequency Separation (kHz) | Limit (2 / 3 of 20dB Bandwidth) (kHz) | Margin (kHz) |
|-----------------|------------------------------------|---------------------------------------|--------------|
| GFSK            | 992.00                             | 628.24                                | 363.76       |
| $\pi/4$ DQPSK   | 1005.00                            | 820.00                                | 185.00       |
| 8DPSK           | 1007.00                            | 842.00                                | 165.00       |

#### Note:


The EUT complies with the minimum channel separation requirement when it is operating **1x/EDR mode using 79 channels** and when operating in **AFH mode using 20 channels**.

## PLOTS OF EMISSIONS

### Carrier Frequency Separation (GFSK Mode)

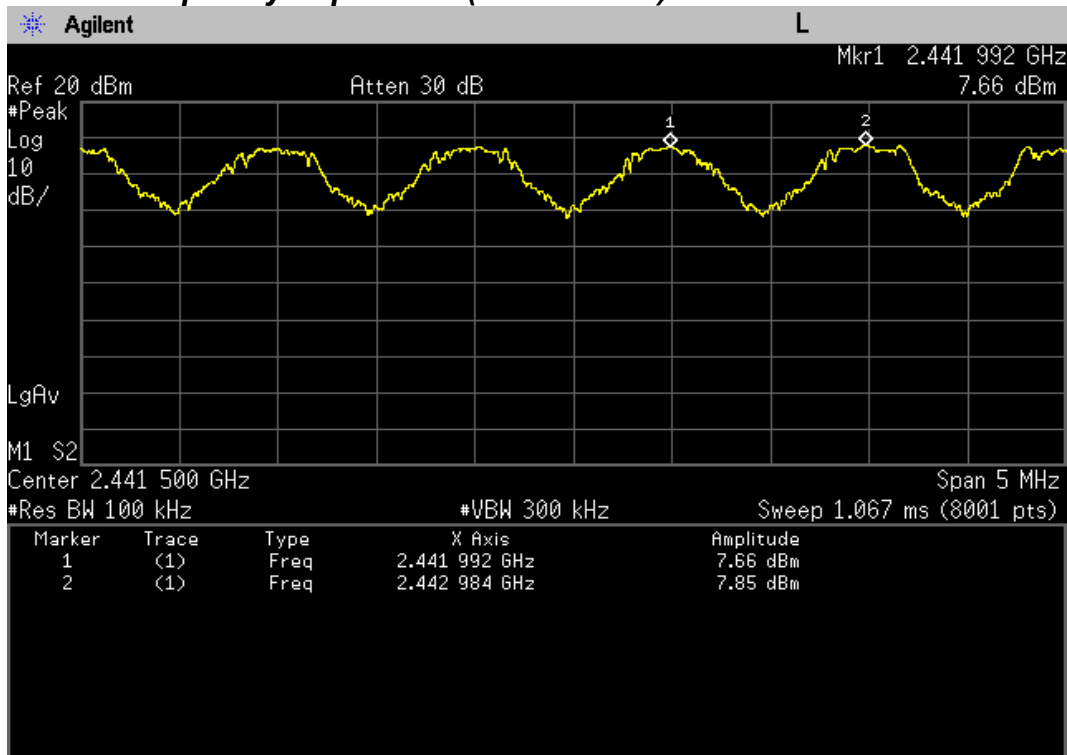


### Carrier Frequency Separation ( $\pi/4$ DQPSK Mode)

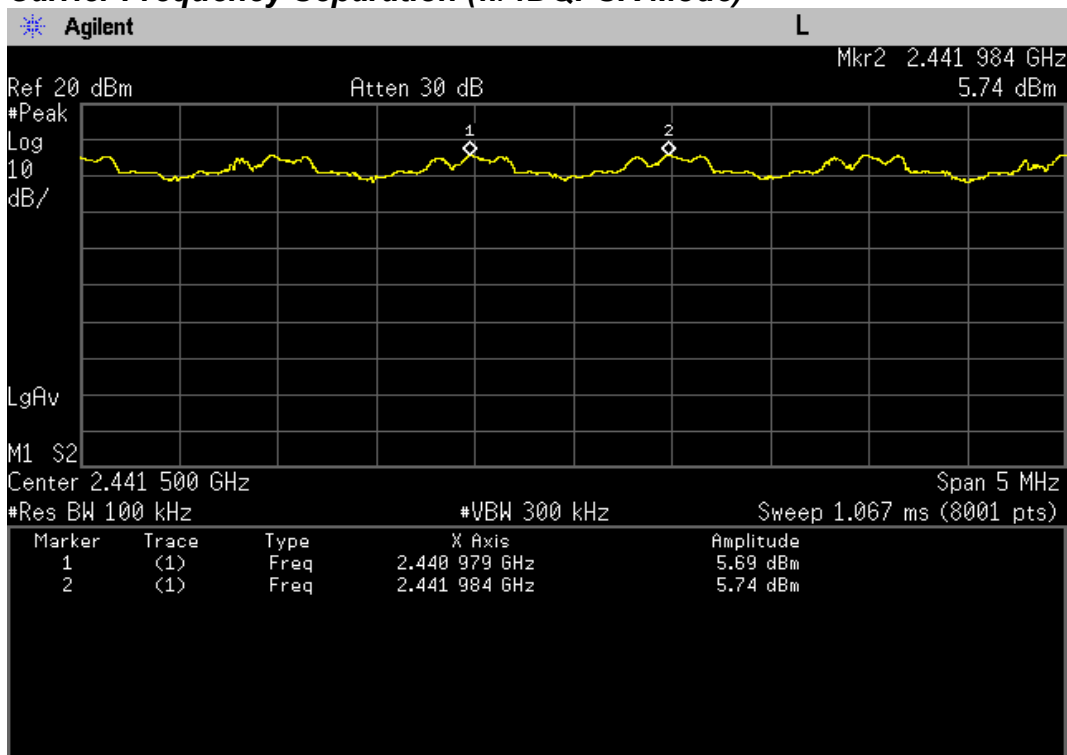

# PLOTS OF EMISSIONS

## Carrier Frequency Separation (8DPSK Mode)

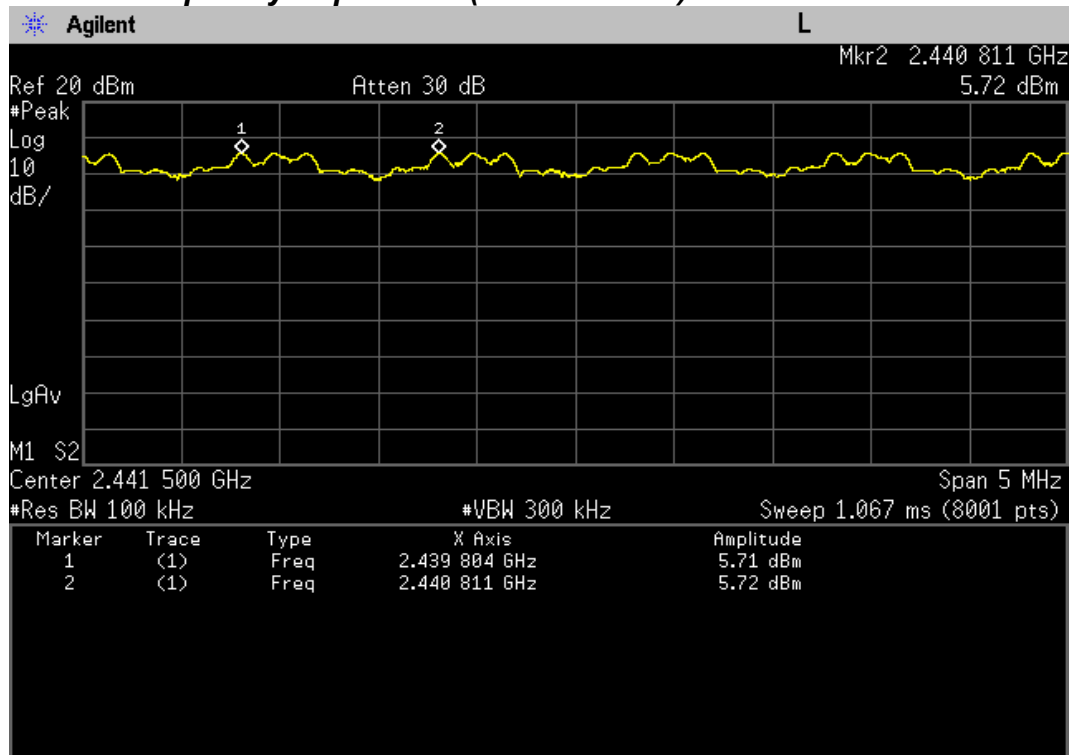

## TEST DATA


### 8.4 Transmitter Average Time of Occupancy

FCC §15.247(a)(1), IC RSS-247 Issue 2, 5.1

Test mode : Set to Hopping mode

#### Result

| Mode   | Pulse width (ms) | *)Numbers of slots | **) Average time of Occupancy (ms) | Limit (ms) | Margin (ms) |
|--------|------------------|--------------------|------------------------------------|------------|-------------|
| 1x/EDR | 2.904            | 106.67             | 309.76                             | 400        | 90.24       |
| AFH    | 2.904            | 53.33              | 154.88                             | 400        | 245.12      |

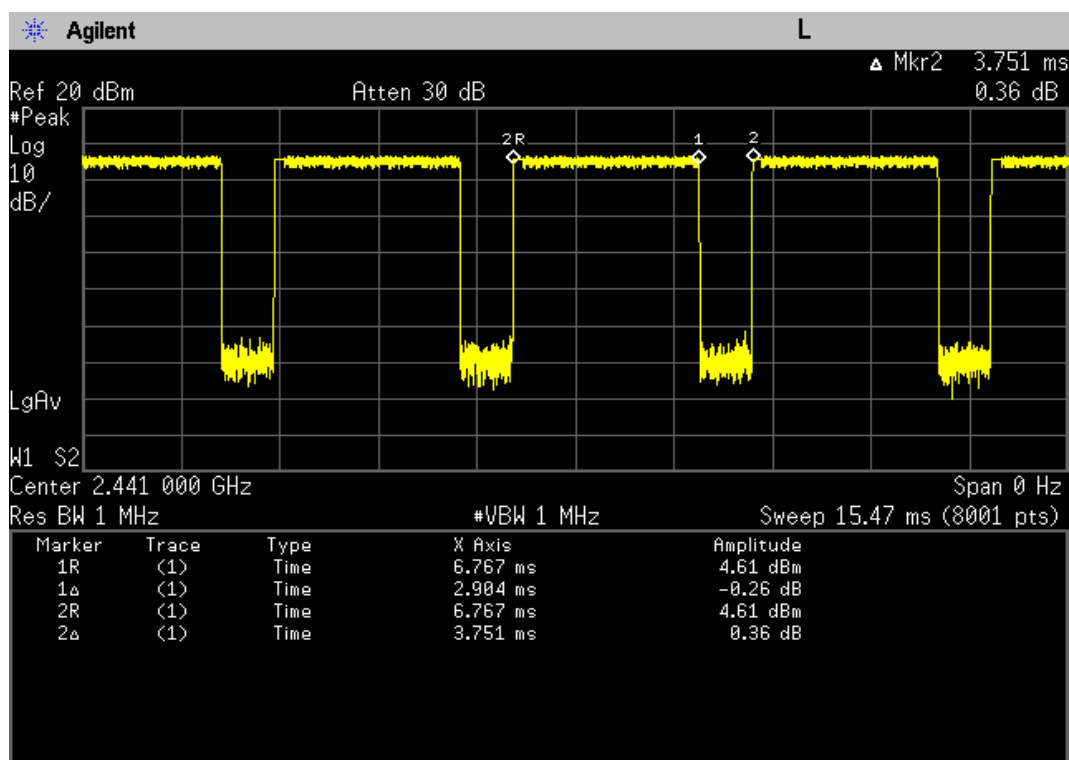

**1x/EDR mode**

- 1) This result was measured at DH5 mode in **1x/EDR mode**, which has longest time in one transmission burst.
- 2) Bluetooth 1x/EDR mode has a channel hopping rate of 1600 hops/s and 79 hopping channels.
- 3) The average time of occupancy in the specified 31.6 second period (79 channels x 0.4 s) is equal to pulse width x (hopping rate / 6) / 79 x (0.4 x hopping channels).
- 4) \*) Numbers of slots in 31.6 sec =  $(1600 / 6) / 79 \times 31.6$
- 5) \*\*) Average time of Occupancy =  $2.904 \text{ ms} \times 106.67 = 309.76 \text{ ms}$

**AFH mode**

- 1) This result was measured at DH5 mode in **AFH mode**, which has longest time in one transmission burst.
- 2) Bluetooth AFH mode has a channel hopping rate of 800 hops/s and 20 hopping channels.
- 3) The average time of occupancy in the specified 8 second period (20 channels x 0.4 s) is equal to pulse width x (hopping rate / 6) / 20 x (0.4 x hopping channels).
- 4) \*) Numbers of slots in 20 sec =  $(800 / 6) / 20 \times 8$
- 5) \*\*) Average time of Occupancy =  $2.904 \text{ ms} \times 53.33 = 154.88 \text{ ms}$

## TEST DATA


### 8.5 Number of Hopping Channels

FCC §15.247(a)(1)(iii), IC RSS-247 Issue 2, 5.1

Test mode : Set to Hopping mode

#### Result

The EUT complies with the minimum number of hopping channels when it is operating **1x/EDR mode using 79 channels** and when operating in **AFH mode using 20 channels**.

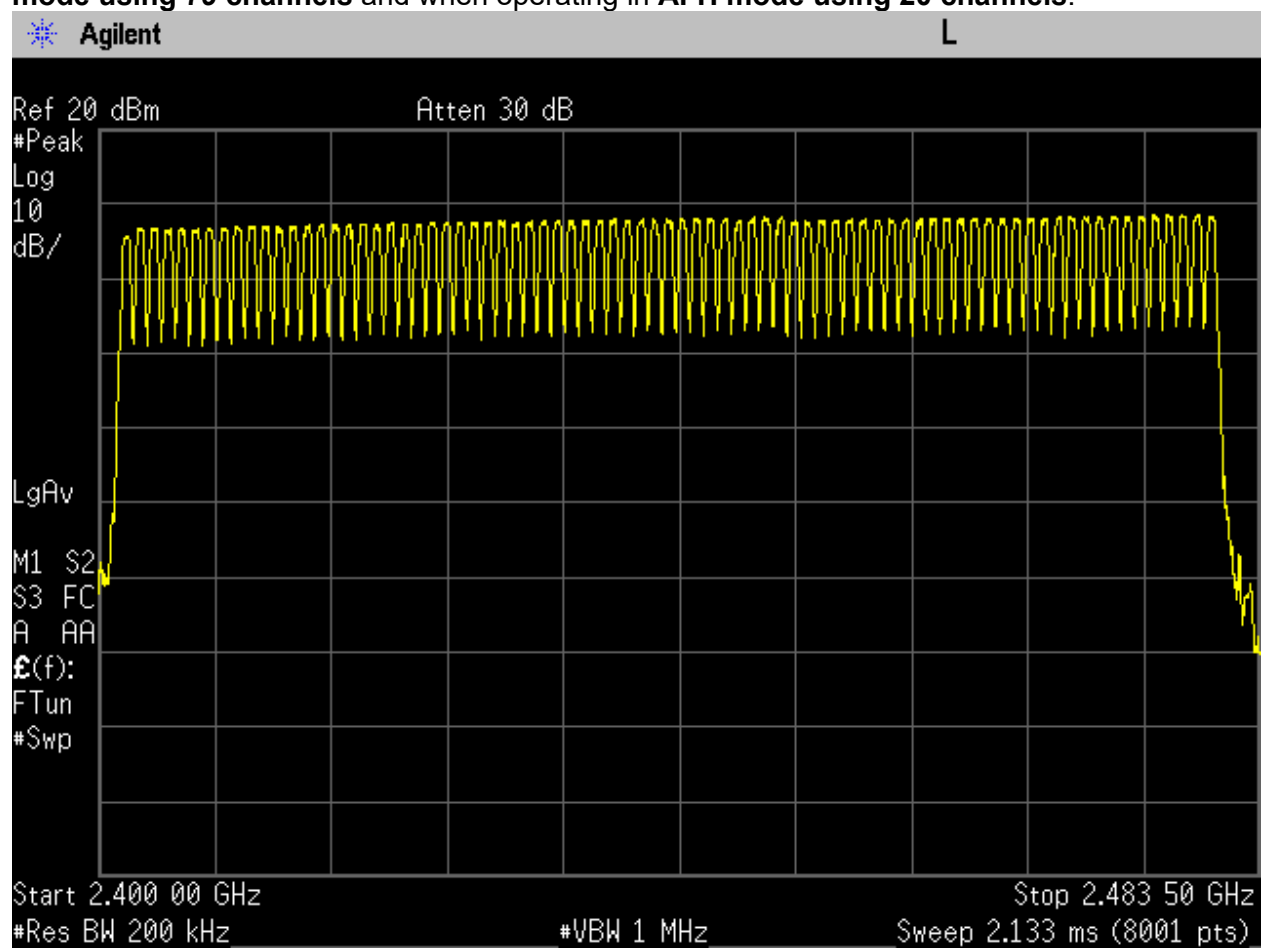

## TEST DATA

### 8.6 Peak Output Power and E.I.R.P

#### FCC §15.247(b)(1), IC RSS-247 Issue 2, 5.4

#### Test Mode : Set to Lowest channel, Middle channel and Highest channel

#### Result

| Modulation    | Frequency (MHz) | Peak Power (dBm) | Limit (dBm) | E.I.R.P* (dBm) | E.I.R.P Limit (dB) | Result   |
|---------------|-----------------|------------------|-------------|----------------|--------------------|----------|
| GFSK          | 2402            | 5.80             | 30.00       | 8.41           | 36.00              | Complies |
| GFSK          | 2441            | 7.99             | 30.00       | 10.60          | 36.00              | Complies |
| GFSK          | 2480            | 8.53             | 30.00       | 11.14          | 36.00              | Complies |
| $\pi/4$ DQPSK | 2402            | 3.81             | 30.00       | 6.42           | 36.00              | Complies |
| $\pi/4$ DQPSK | 2441            | 6.87             | 30.00       | 9.48           | 36.00              | Complies |
| $\pi/4$ DQPSK | 2480            | 7.45             | 30.00       | 10.06          | 36.00              | Complies |
| 8DPSK         | 2402            | 5.70             | 30.00       | 8.31           | 36.00              | Complies |
| 8DPSK         | 2441            | 7.21             | 30.00       | 9.82           | 36.00              | Complies |
| 8DPSK         | 2480            | 7.82             | 30.00       | 10.43          | 36.00              | Complies |

#### Note:

The following formular was used for spectrum offset:

Spectrum offset (dB) = Attenuator (dB) + Cable Loss (dB) + SMA Type Connector Loss (dB)

\*) E.I.R.P was calculated by following equation according to KDB412172 D01 Determining ERP and EIRP v01r01.

$$E.I.R.P = P_T + G_T - L_C$$


$P_T$  = Peak outputpower (dBm)

$G_T$  = Gain of the transmitting antenna in dBi, Peak antenna gain is 2.61 dBi.


$L_C$  = Signal attenuation in the connecting cable between the transmitter and antenna in dB. This factor of an integral antenna is negligible.

# PLOT OF TEST DATA

## Maximum Peak Output Power, Lowest channel (2402 MHz, GFSK mode)

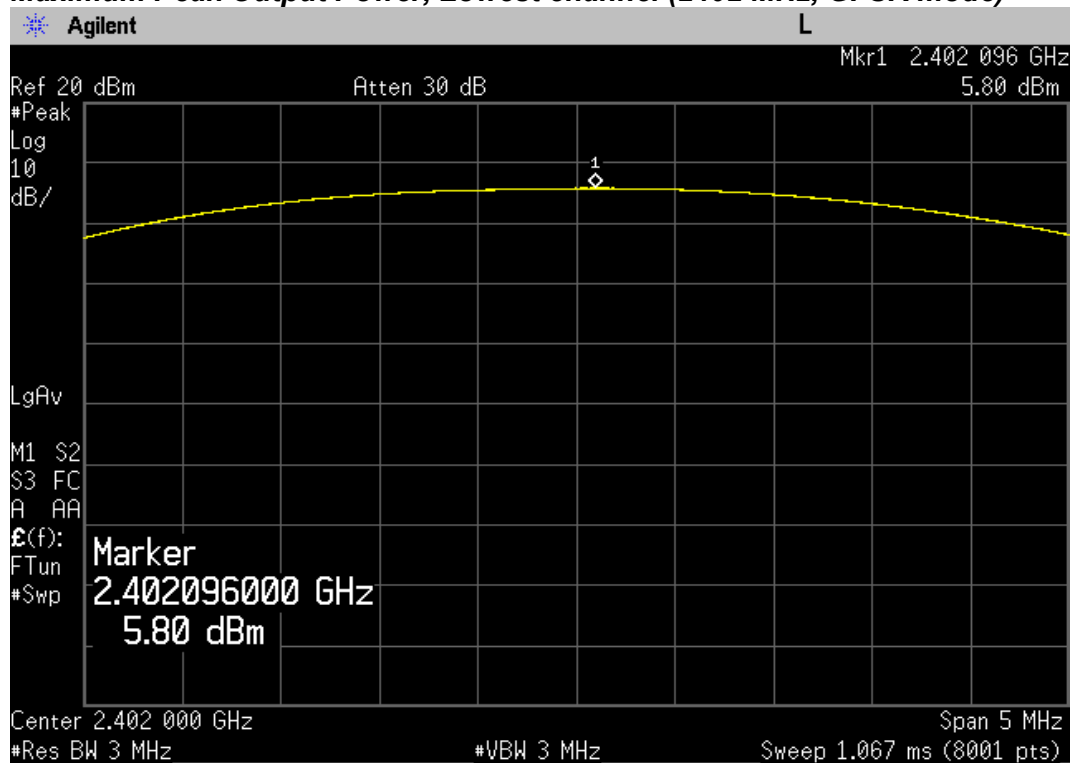


## Maximum Peak Output Power, Middle channel (2441 MHz, GFSK mode)

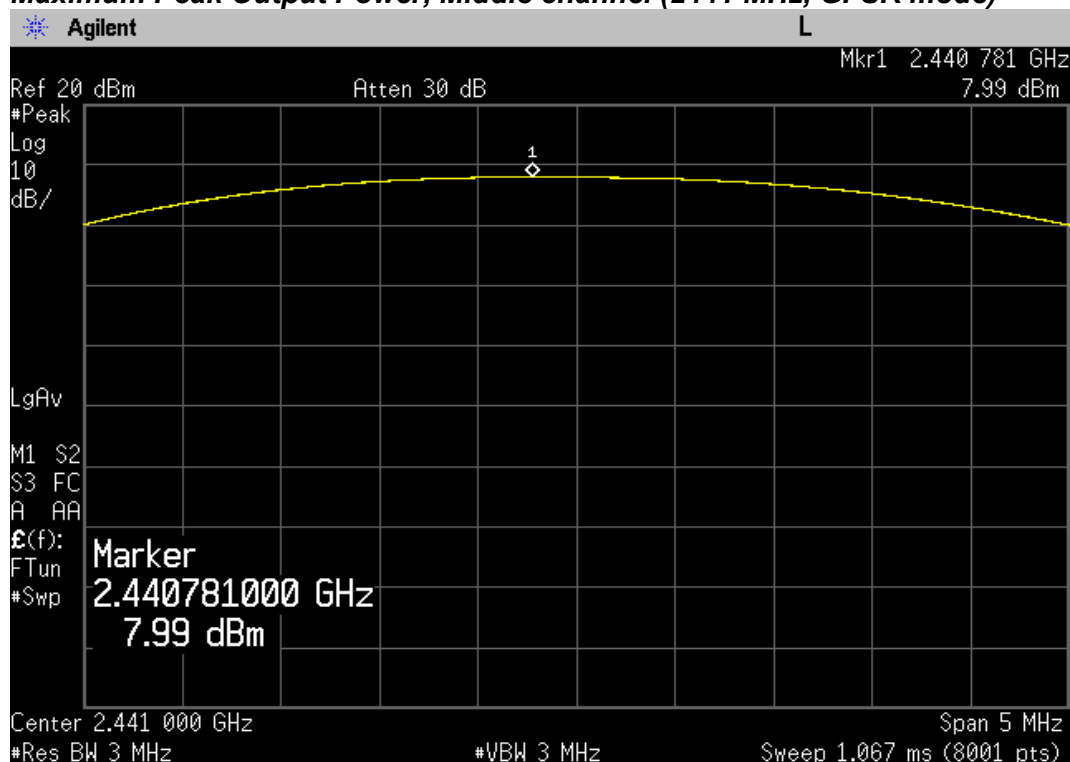


## PLOT OF TEST DATA

### Maximum Peak Output Power, Highest channel (2480 MHz, GFSK mode)

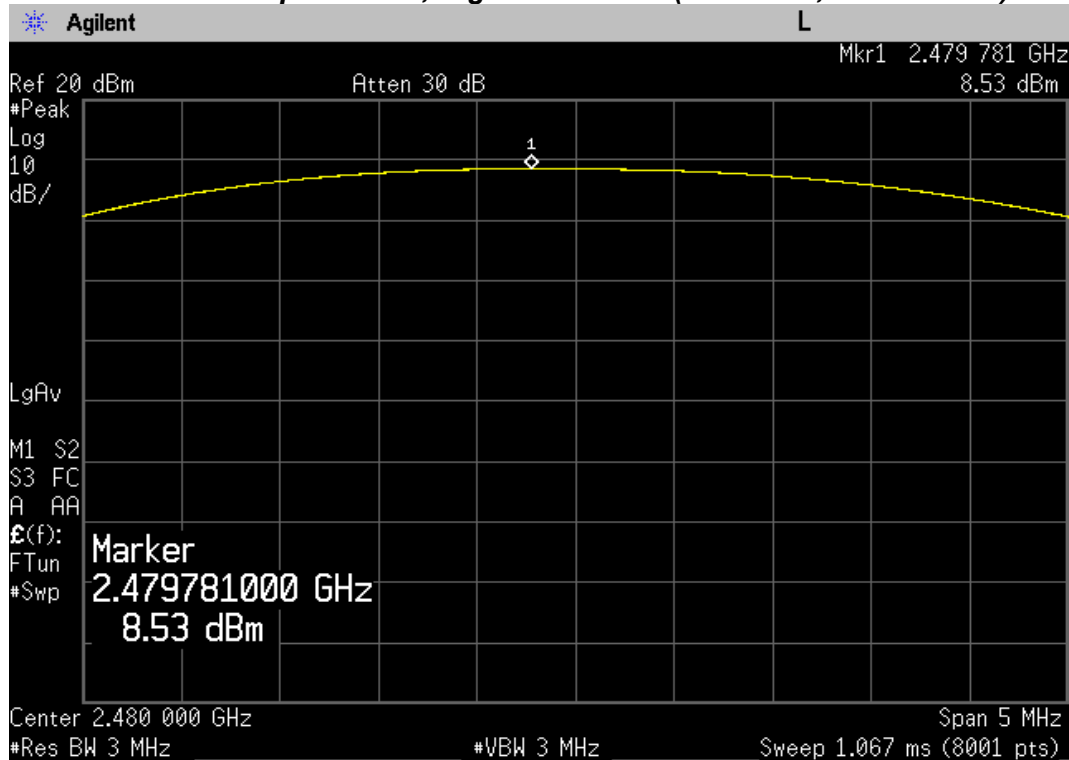


### Maximum Peak Output Power, Lowest channel (2402 MHz, $\pi/4$ DQPSK)

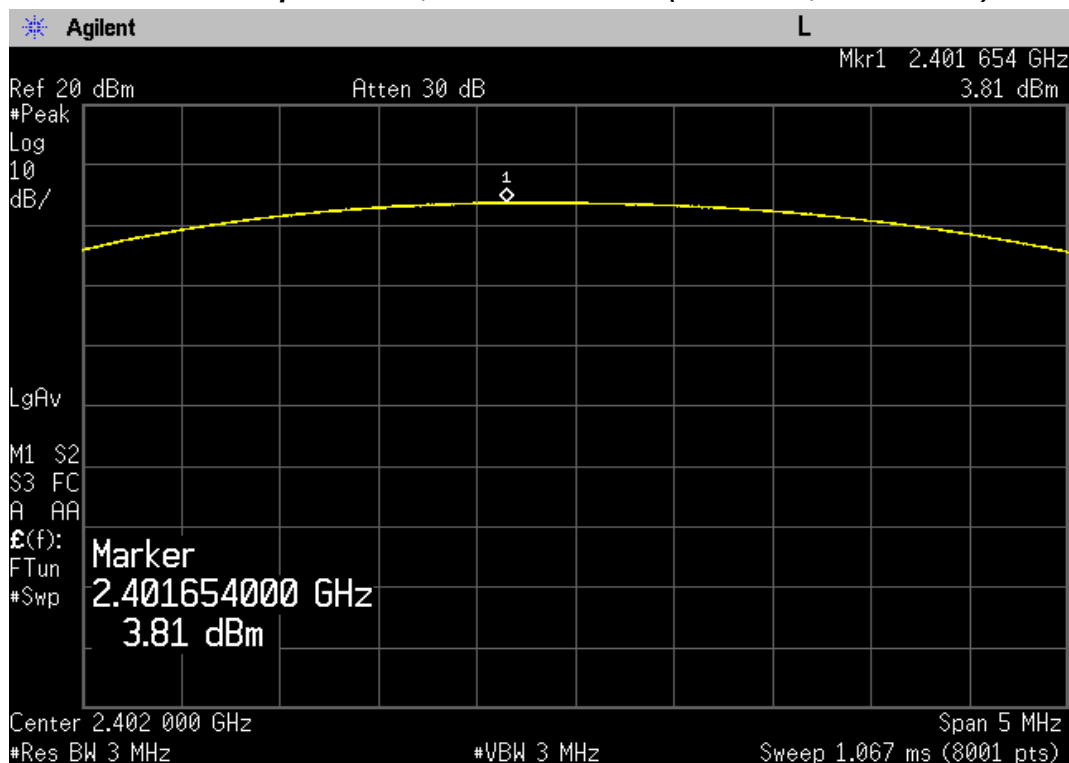


## PLOT OF TEST DATA

### Maximum Peak Output Power, Middle channel (2441 MHz, $\pi/4$ DQPSK)

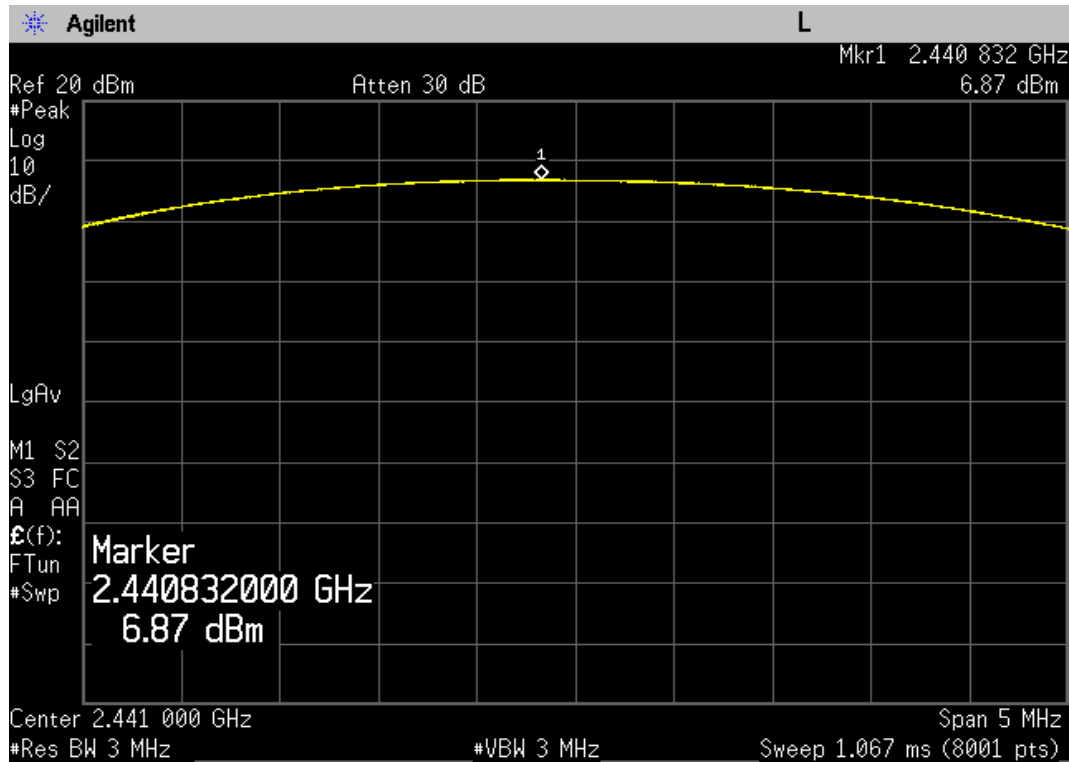


### Maximum Peak Output Power, Highest channel (2480 MHz, $\pi/4$ DQPSK)

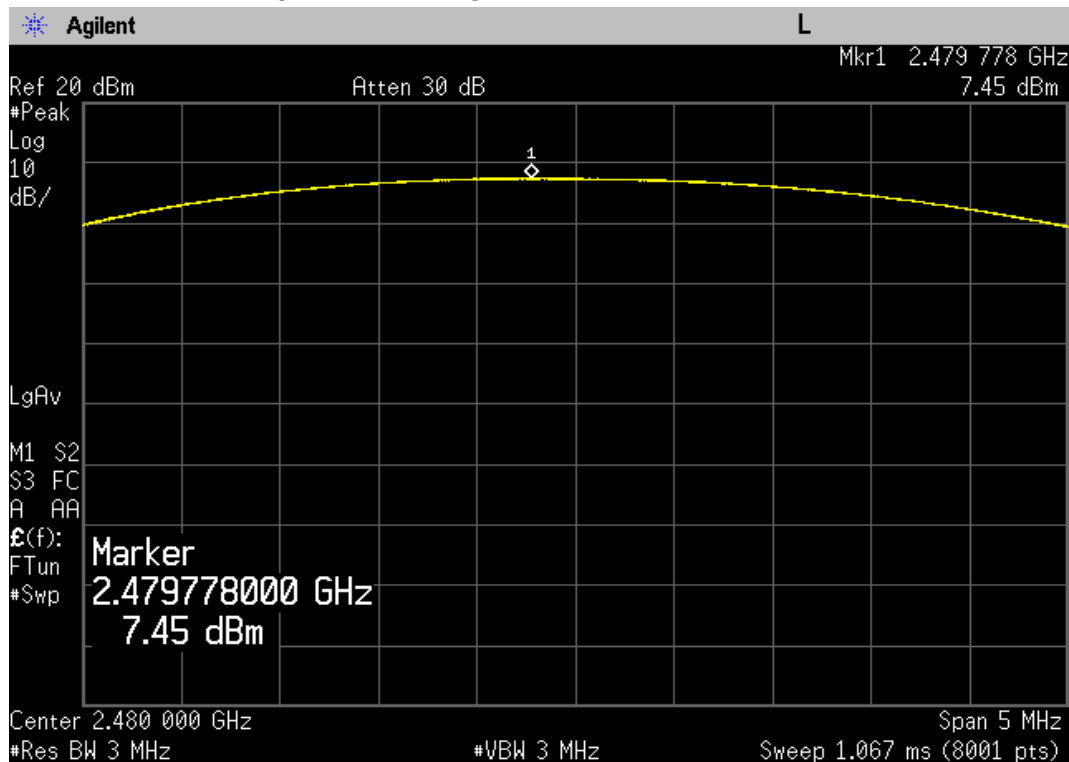


## PLOT OF TEST DATA

**Maximum Peak Output Power, Lowest channel (2402 MHz, 8DPSK)**

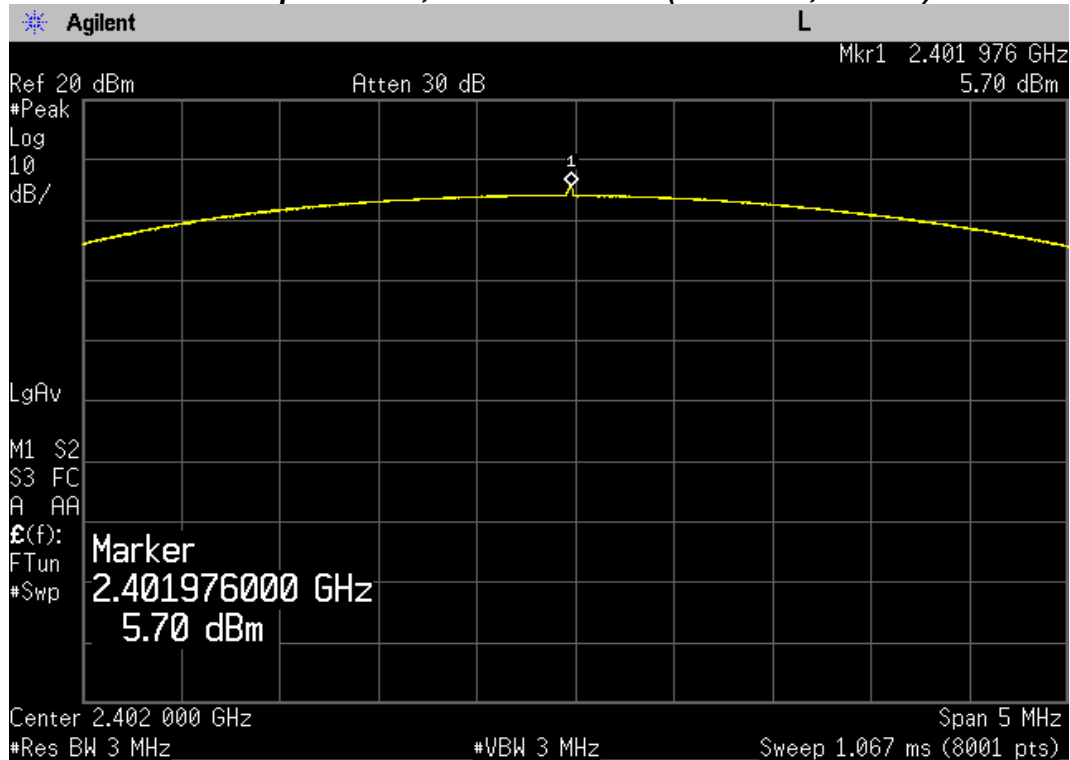


**Maximum Peak Output Power, Middle channel (2441 MHz, 8DPSK)**

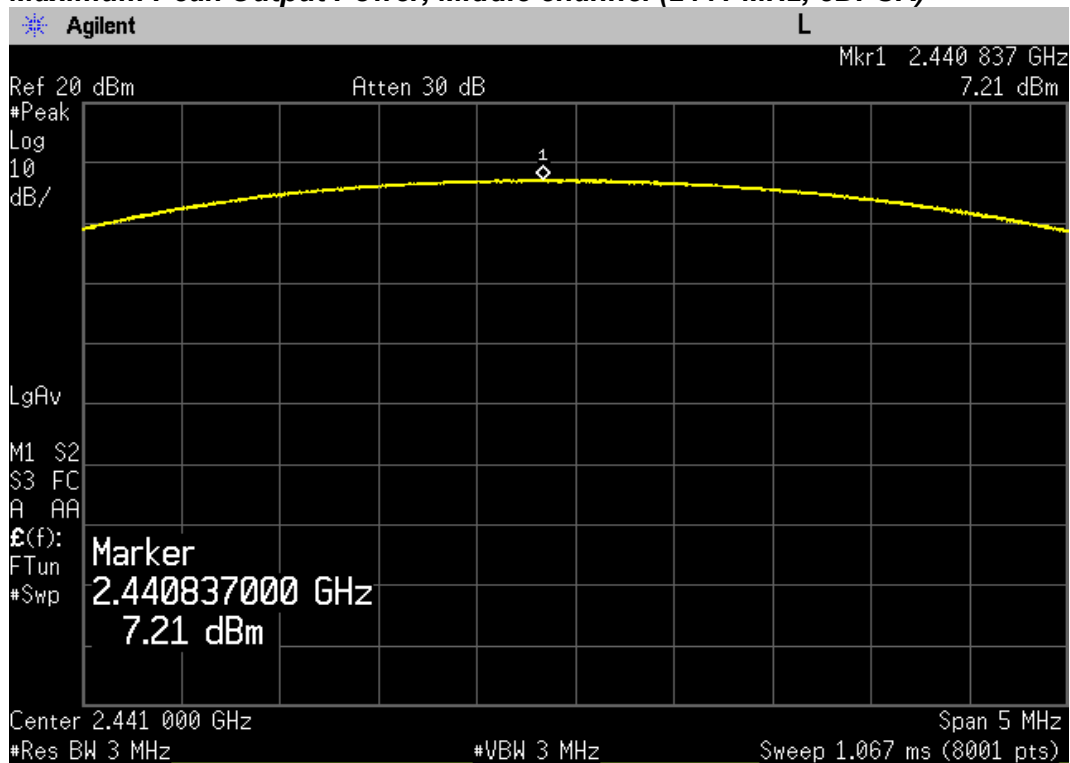

## PLOT OF TEST DATA

### Maximum Peak Output Power, Highest channel (2480 MHz, 8DPSK)

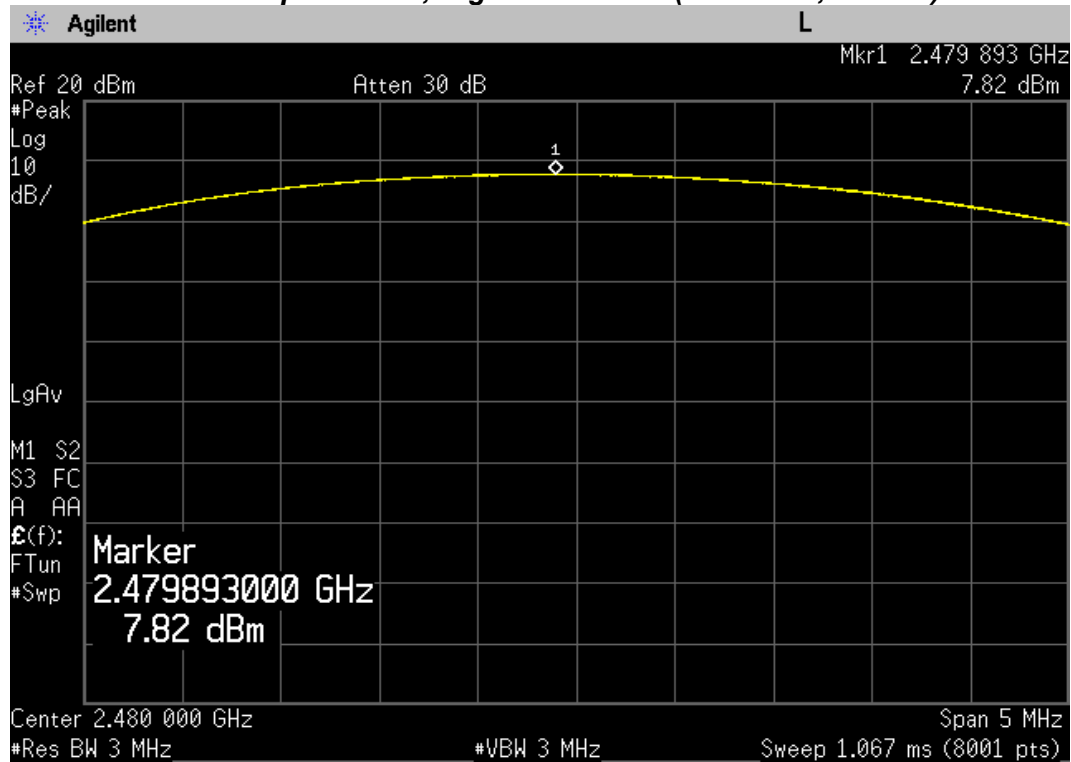

## TEST DATA

### 8.7 Conducted Spurious Emission

FCC §15.247(d), IC RSS-247 Issue 2, 5.5

Test Mode : Set to Lowest channel, Middle channel and Highest channel

#### Result


| Modulation Mode | Frequency (MHz) | Result           | Limit (dBc) |
|-----------------|-----------------|------------------|-------------|
| GFSK            | 2402            | More than 20 dBc | 20          |
| GFSK            | 2441            | More than 20 dBc | 20          |
| GFSK            | 2480            | More than 20 dBc | 20          |
| $\pi/4$ DQPSK   | 2402            | More than 20 dBc | 20          |
| $\pi/4$ DQPSK   | 2441            | More than 20 dBc | 20          |
| $\pi/4$ DQPSK   | 2480            | More than 20 dBc | 20          |
| 8DPSK           | 2402            | More than 20 dBc | 20          |
| 8DPSK           | 2441            | More than 20 dBc | 20          |
| 8DPSK           | 2480            | More than 20 dBc | 20          |

#### Note:


1. The cable and attenuator loss from 30 MHz to 26.5 GHz was reflected in spectrum analyzer with correction factor for the spurious emissions test.
2. The spurious limit is determined by peak fundamental level of bandedge.

## PLOT OF TEST DATA

### Conducted Spurious Emissions, 30 MHz ~ 26.5 GHz (2402 MHz, GFSK Mode)

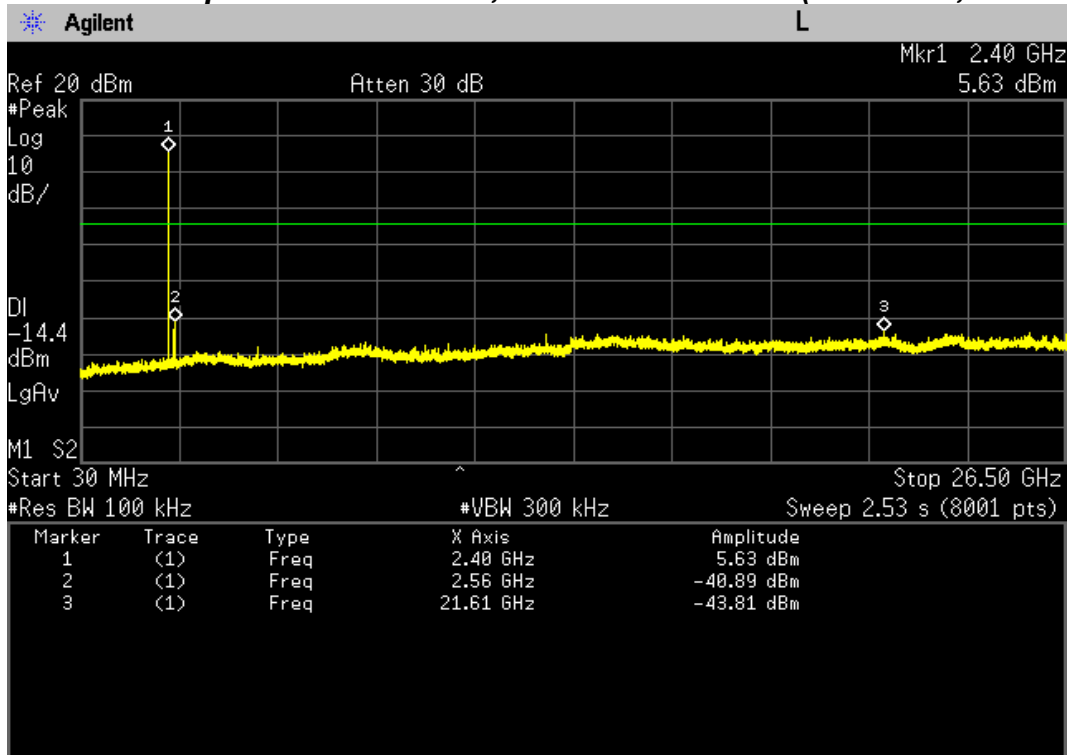


### Conducted Spurious Emissions, 30 MHz ~ 26.5 GHz (2441 MHz, GFSK Mode)

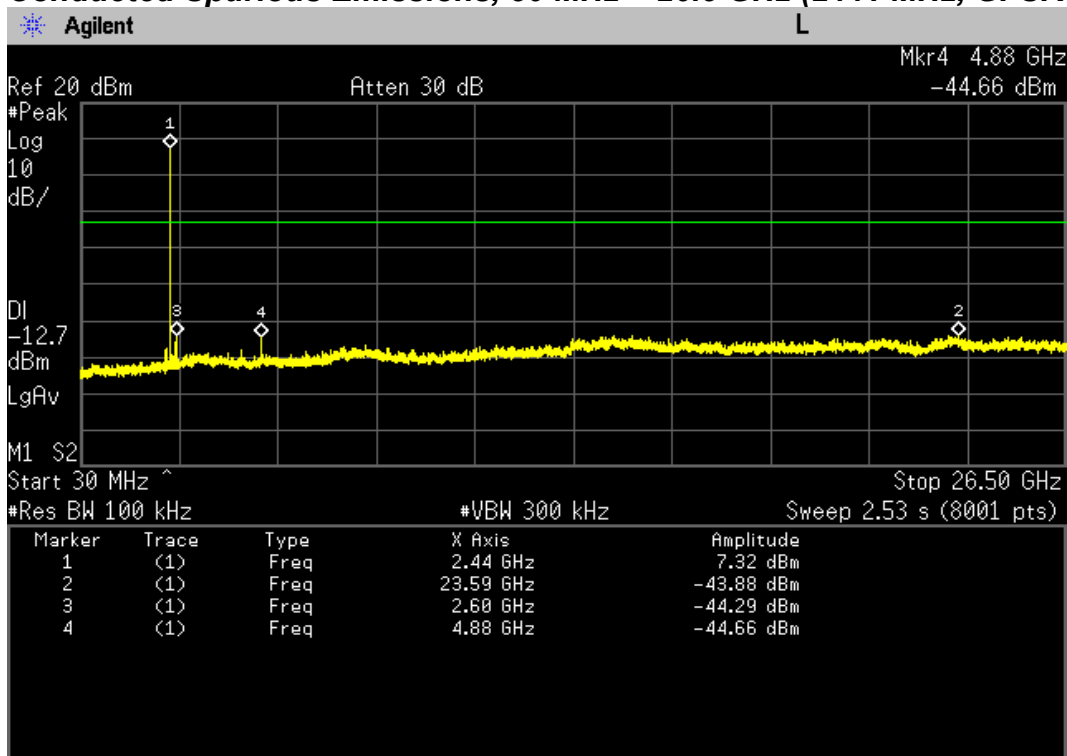


## PLOT OF TEST DATA

### Conducted Spurious Emissions, 30 MHz ~ 26.5 GHz (2480 MHz, GFSK Mode)

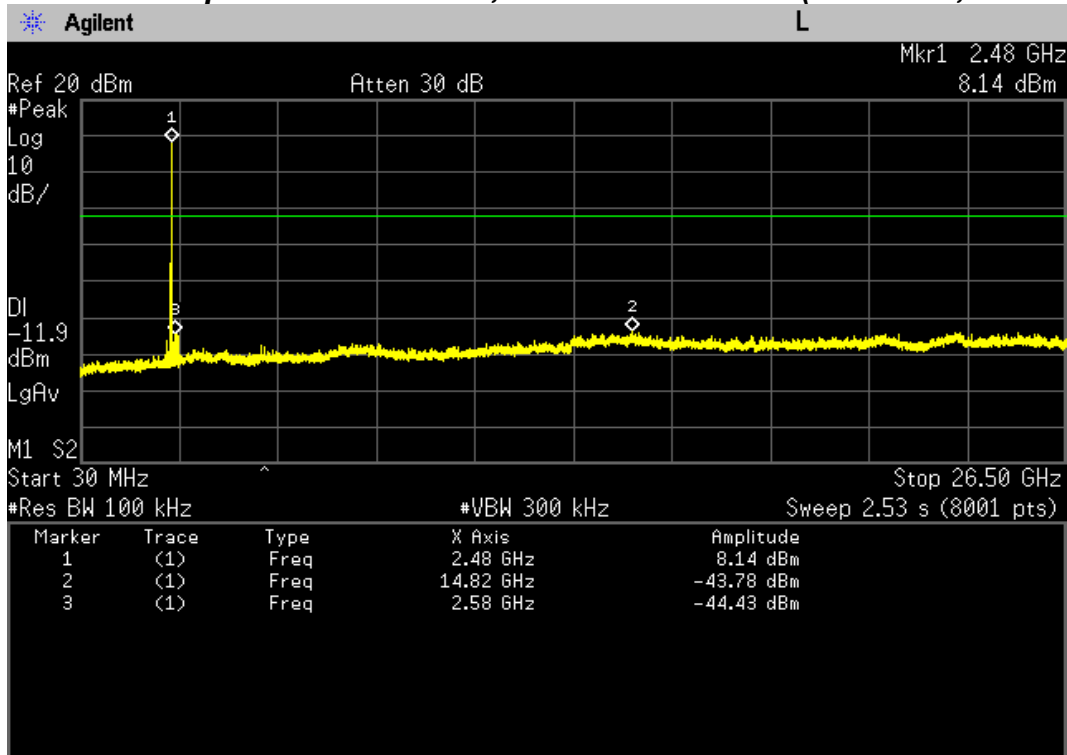


### Conducted Spurious Emissions, 30 MHz ~ 26.5 GHz(2402 MHz, $\pi/4$ DQPSK Mode)

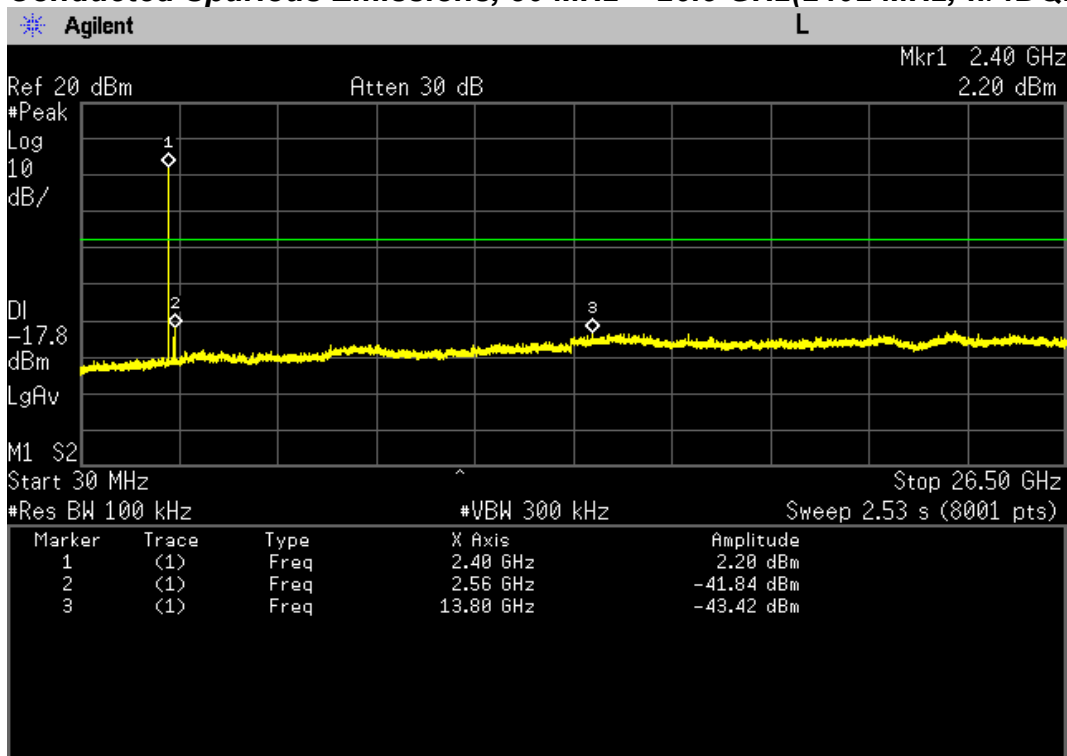


## PLOT OF TEST DATA

### Conducted Spurious Emissions, 30 MHz ~ 26.5 GHz(2441 MHz, $\pi/4$ DQPSK Mode)

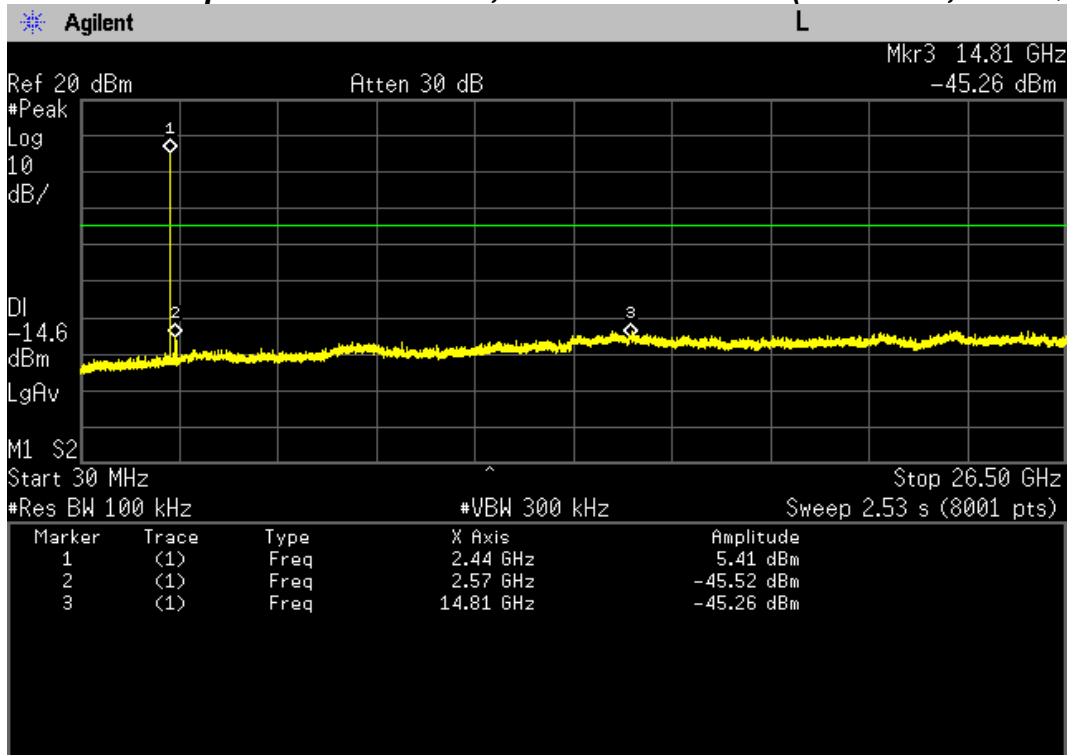


### Conducted Spurious Emissions, 30 MHz ~ 26.5 GHz(2480 MHz, $\pi/4$ DQPSK Mode)

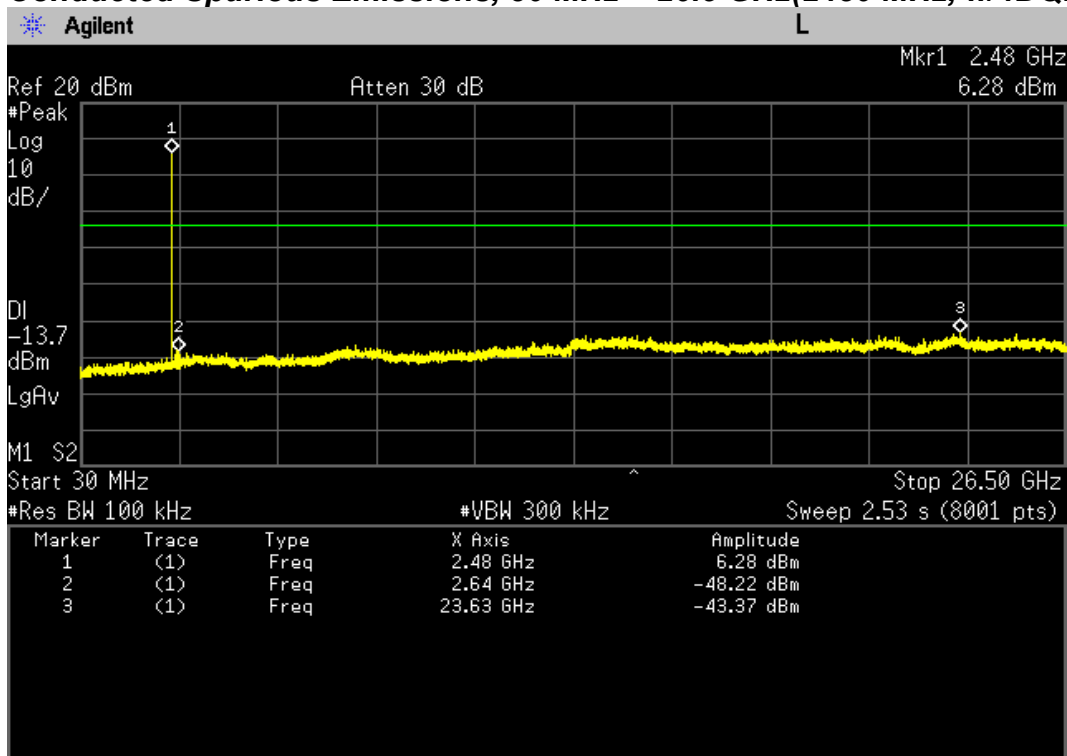


# PLOT OF TEST DATA

## Conducted Spurious Emissions, 30 MHz ~ 26.5 GHz (2402 MHz, 8DPSK Mode)

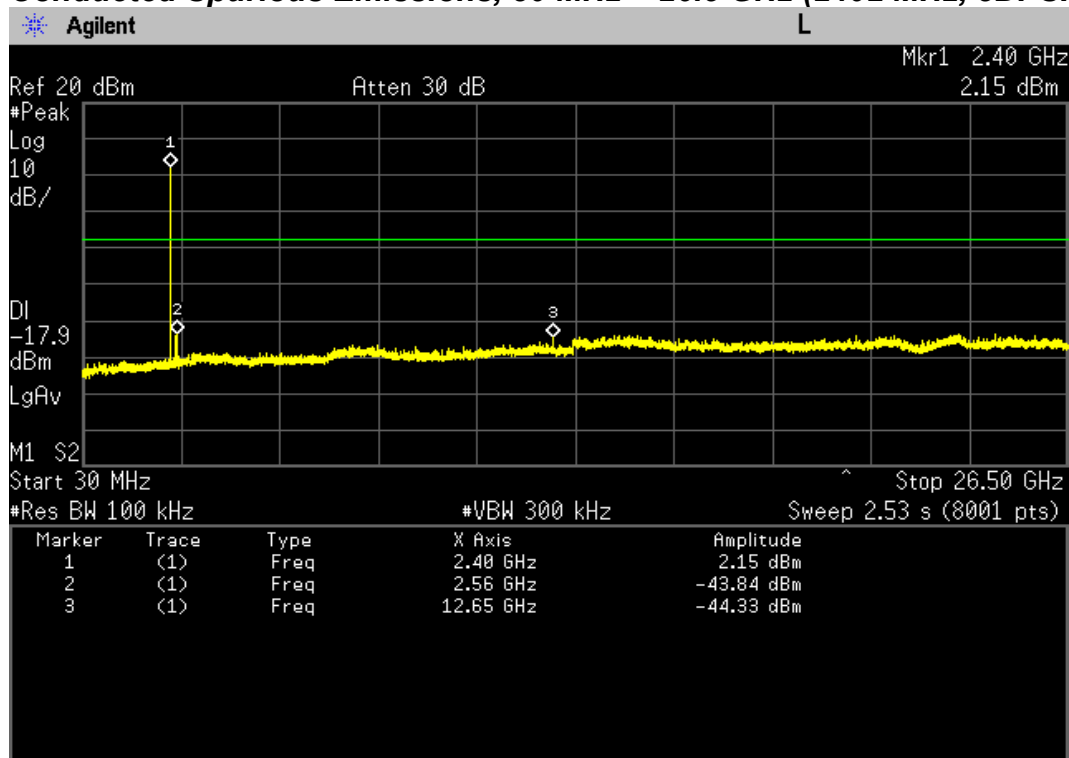


## Conducted Spurious Emissions, 30 MHz ~ 26.5 GHz (2441 MHz, 8DPSK Mode)

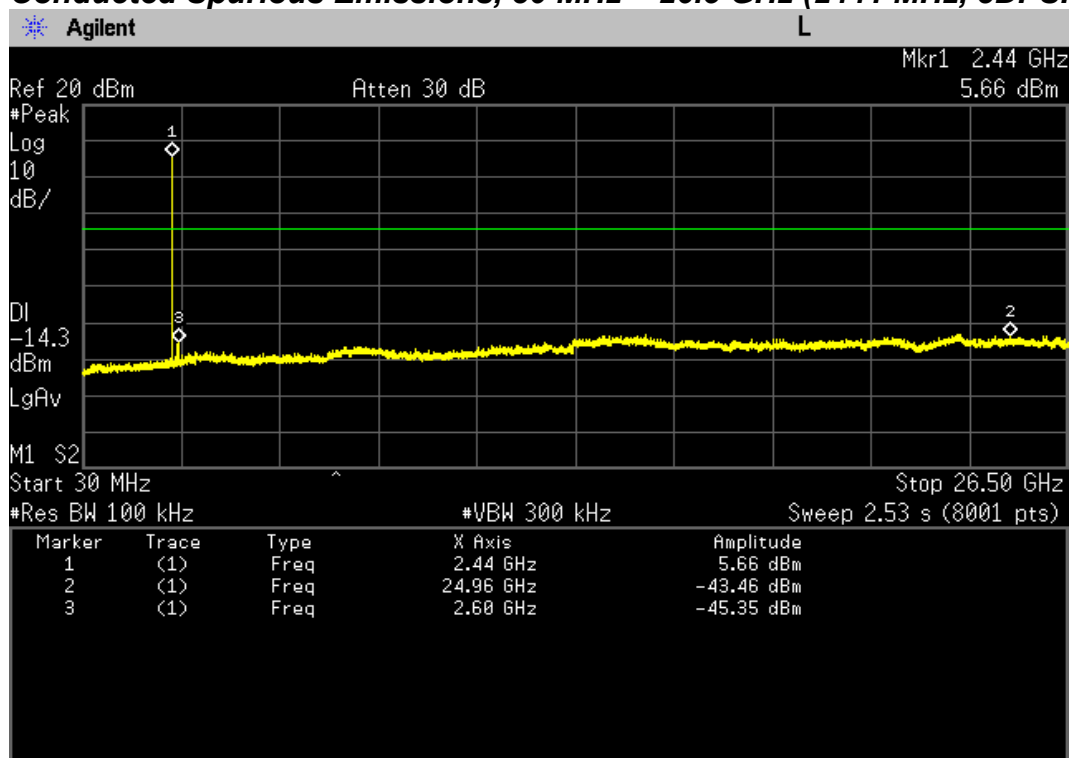


## PLOT OF TEST DATA

### Conducted Spurious Emissions, 30 MHz ~ 26.5 GHz (2480 MHz, 8DPSK Mode)

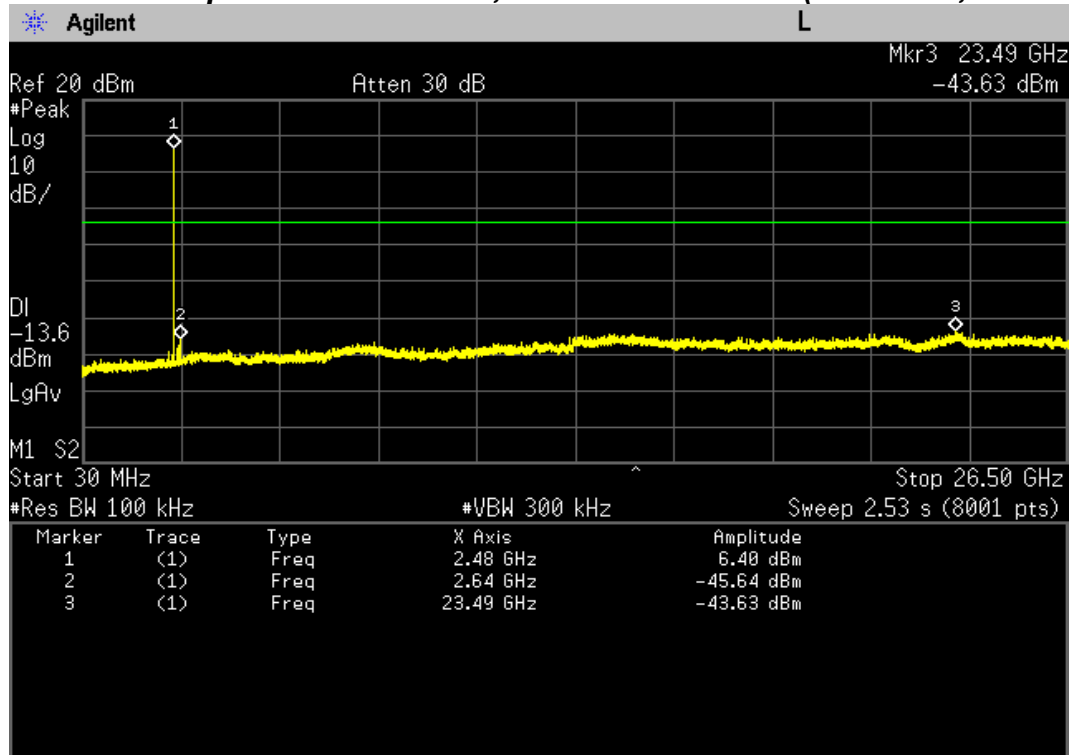


# PLOT OF TEST DATA

## Band Edge Lowest Channel (2402 MHz, GFSK mode)

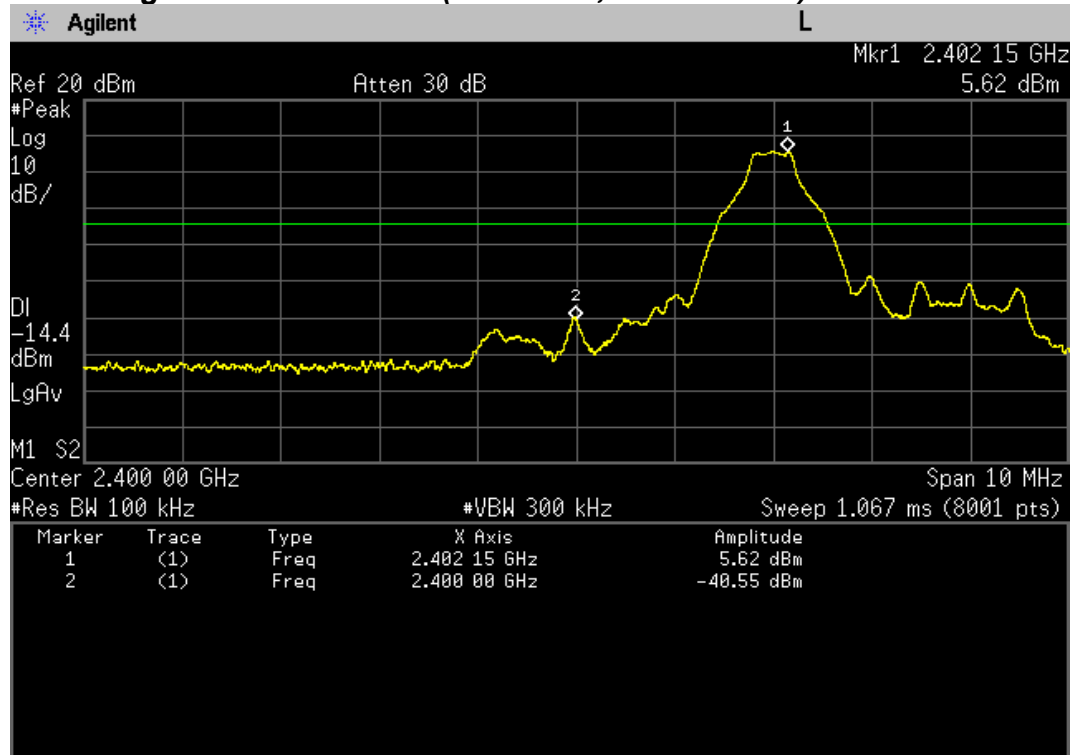


## Band Edge Highest Channel (2480 MHz, GFSK mode)

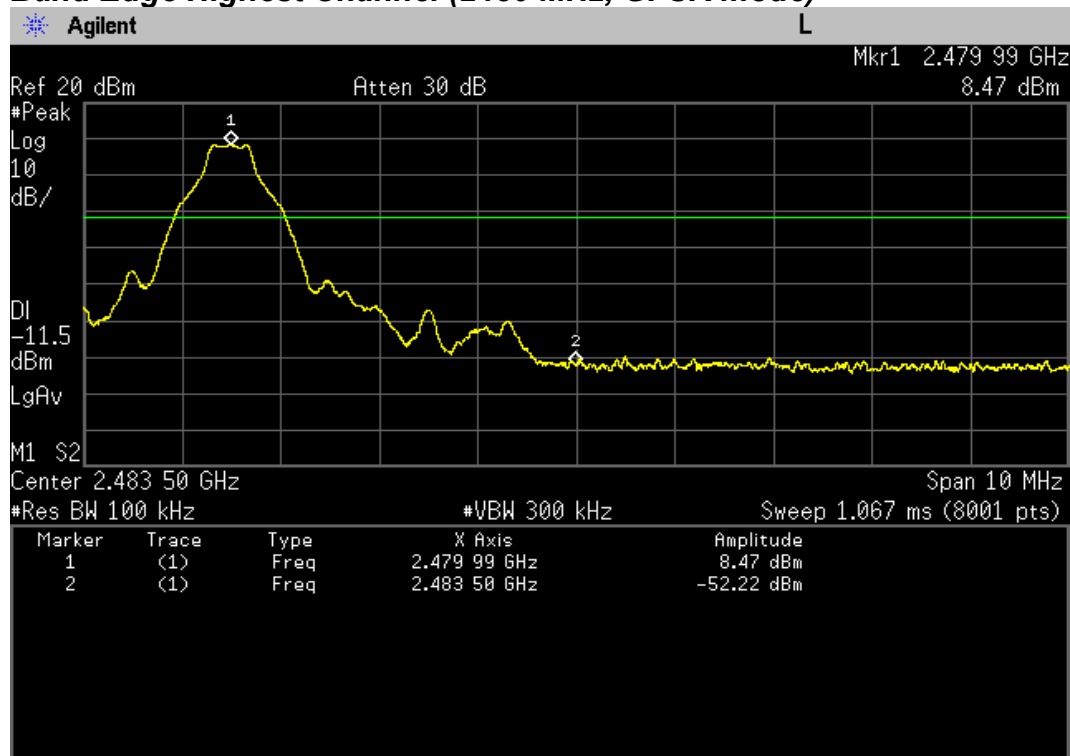


# PLOT OF TEST DATA

## Band Edge Lowest Channel(2402 MHz, $\pi/4$ DQPSK mode)

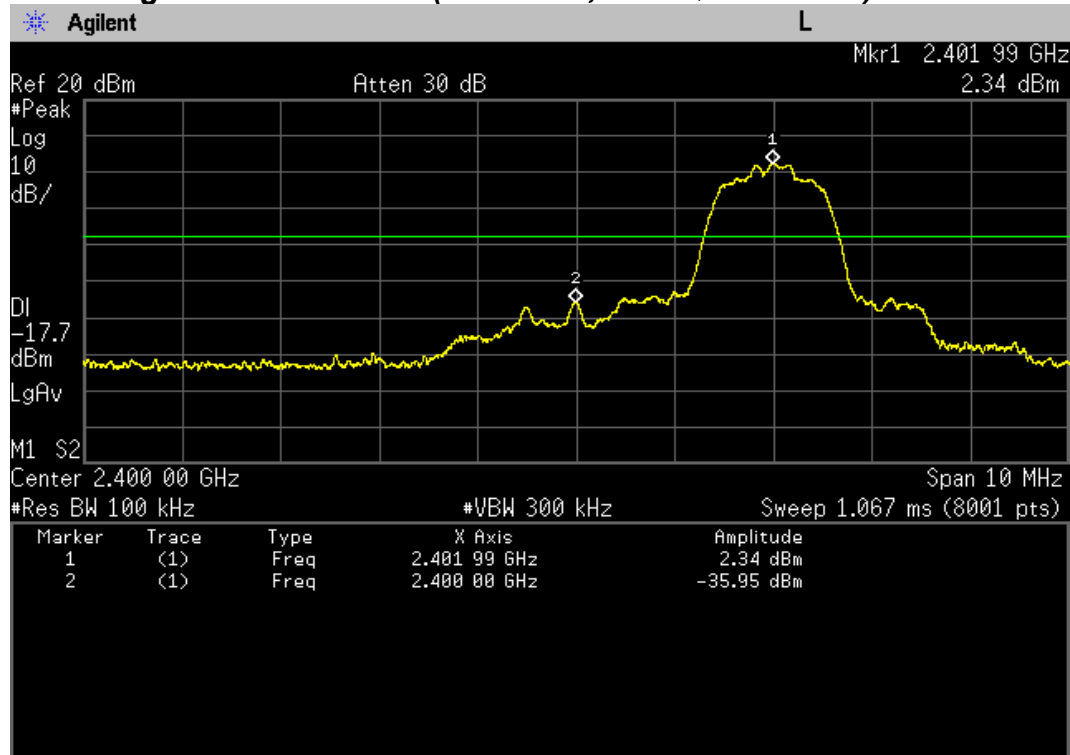


## Band Edge Highest Channel(2480 MHz, $\pi/4$ DQPSK mode)

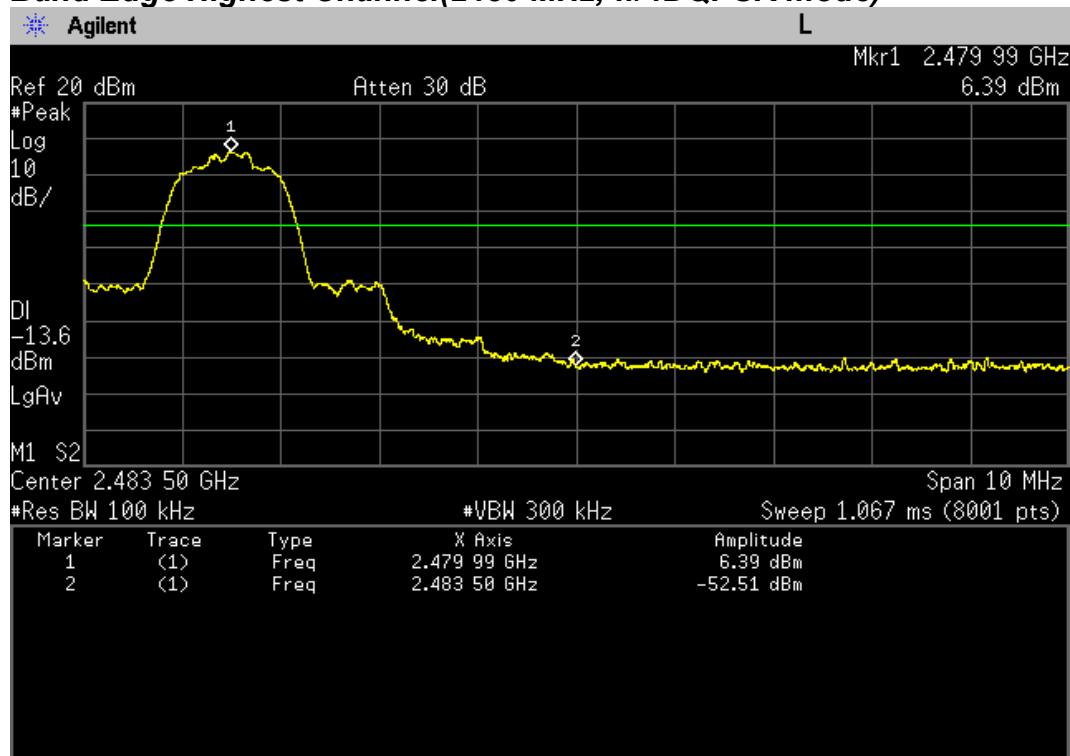


## PLOT OF TEST DATA

### Band Edge Lowest Channel(2402 MHz, 8DPSK mode)

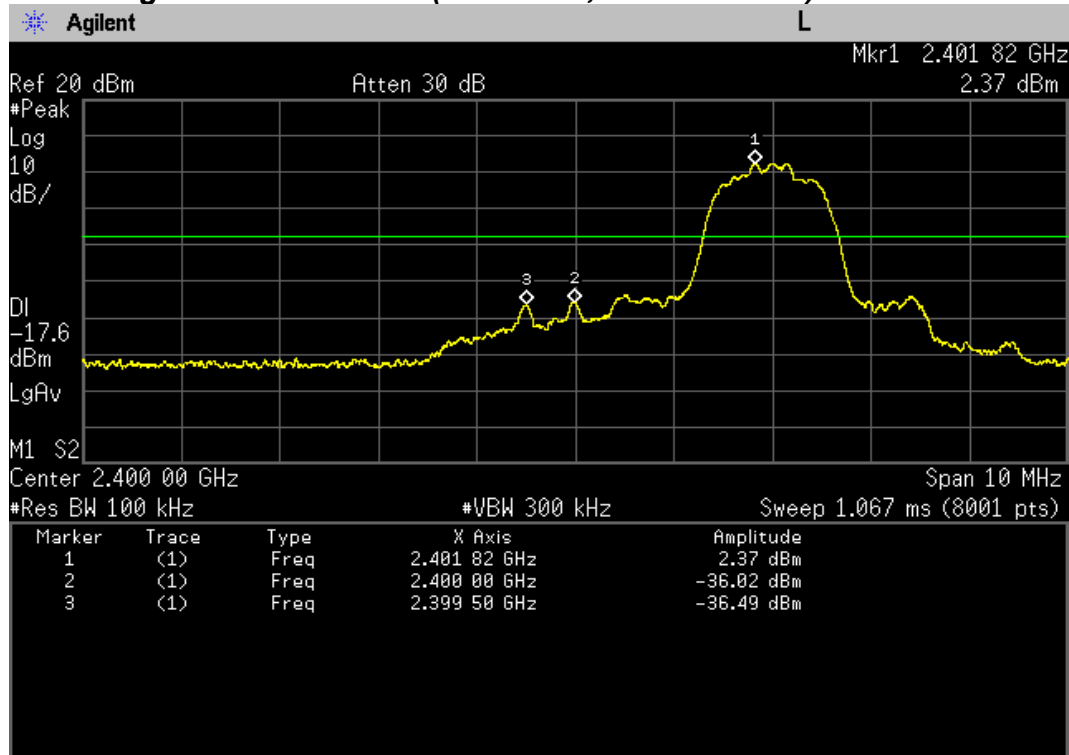

### Band Edge Highest Channel(2480 MHz, 8DPSK mode)

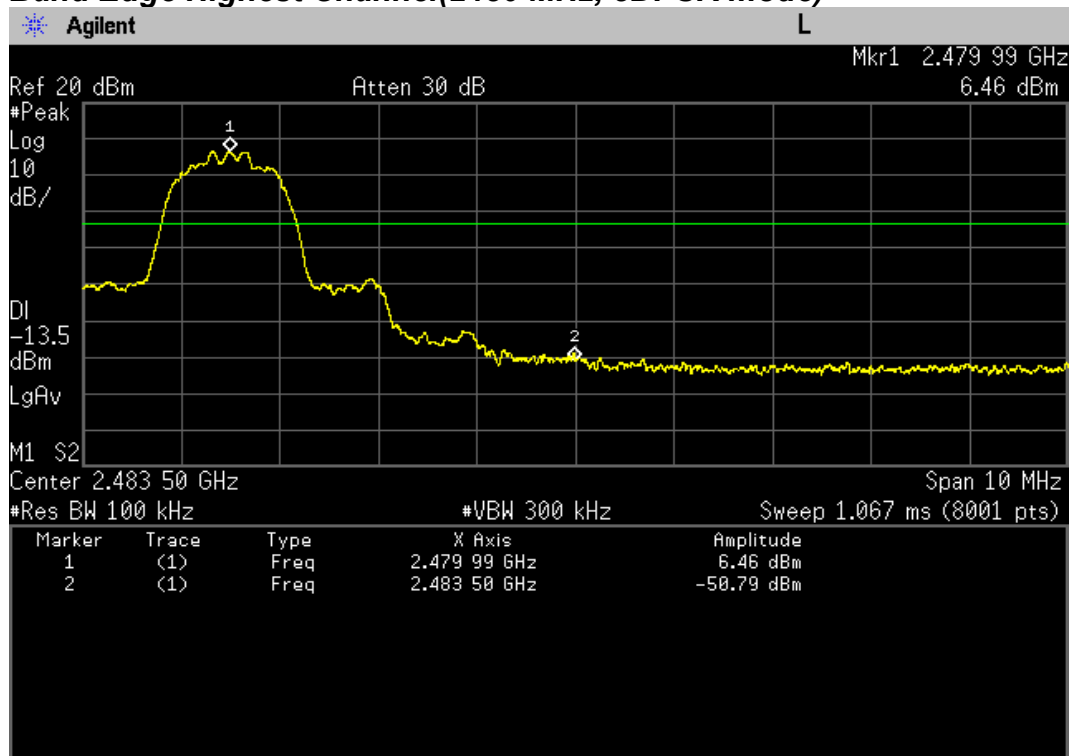

## TEST DATA

### 8.8 Radiated Spurious Emission

**FCC §15.247(d), IC RSS-247 Issue 2, 5.5**

**Test Mode : Set to Lowest channel, Middle channel and Highest channel**

#### **Result**

##### **Lowest Channel**

| Frequency<br>(MHz) | Reading<br>(dBμV) | Pol*<br>(H/V) | mode | AF +CL +Amp<br>(dB)** | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------|-------------------|---------------|------|-----------------------|--------------------|-------------------|----------------|
| 7205.458***        | 41.1              | V             | peak | 8.4                   | 49.5               | 54.0              | 4.5            |

##### **Middle Channel**

| Frequency<br>(MHz) | Reading<br>(dBμV) | Pol*<br>(H/V) | mode    | AF +CL +Amp<br>(dB)** | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------|-------------------|---------------|---------|-----------------------|--------------------|-------------------|----------------|
| 7322.67            | 50.2              | V             | peak    | 8.4                   | 58.6               | 74.0              | 15.4           |
| 7322.96            | 35.2              | V             | average | 8.4                   | 48.6               | 54.0              | 5.5            |

##### **Highest Channel**


| Frequency<br>(MHz) | Reading<br>(dBμV) | Pol*<br>(H/V) | mode    | AF +CL +Amp<br>(dB)** | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------|-------------------|---------------|---------|-----------------------|--------------------|-------------------|----------------|
| 7439.67            | 51.1              | V             | peak    | 8.5                   | 59.6               | 74.0              | 14.4           |
| 7439.93            | 36.7              | V             | average | 8.5                   | 51.7               | 54.0              | 22.8           |

**Notes:**


1. \*Pol. H = Horizontal V = Vertical
2. \*\*AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Other spurious was under 20 dB below Fundamental.
4. \*\*\* This result was measured with RBW 100kHz and peak detection because it is in non-restricted frequency band.
5. GFSK modulation mode was the worst condition.
6. The radiated emissions testing were made by rotating EUT through three orthogonal axes and rotating the receive antenna with horizontal, Vertical polarization. The worst data was recorded.
7. Peak emissions were measured using RBW = 1 MHz, VBW = 3 MHz, Detector = Peak.
8. Average emissions were measured using RBW = 1 MHz, VBW = 1 kHz, Detector = Peak.
9. The spectrum was measured from 9 kHz to 10<sup>th</sup> harmonic and the worst-case emissions were reported. No significant emissions were found beyond the 3rd harmonic for this device.

# PLOTS OF EMISSIONS

## Worst Case : 2480 MHz GFSK modulation : 1 GHz to 8 GHz

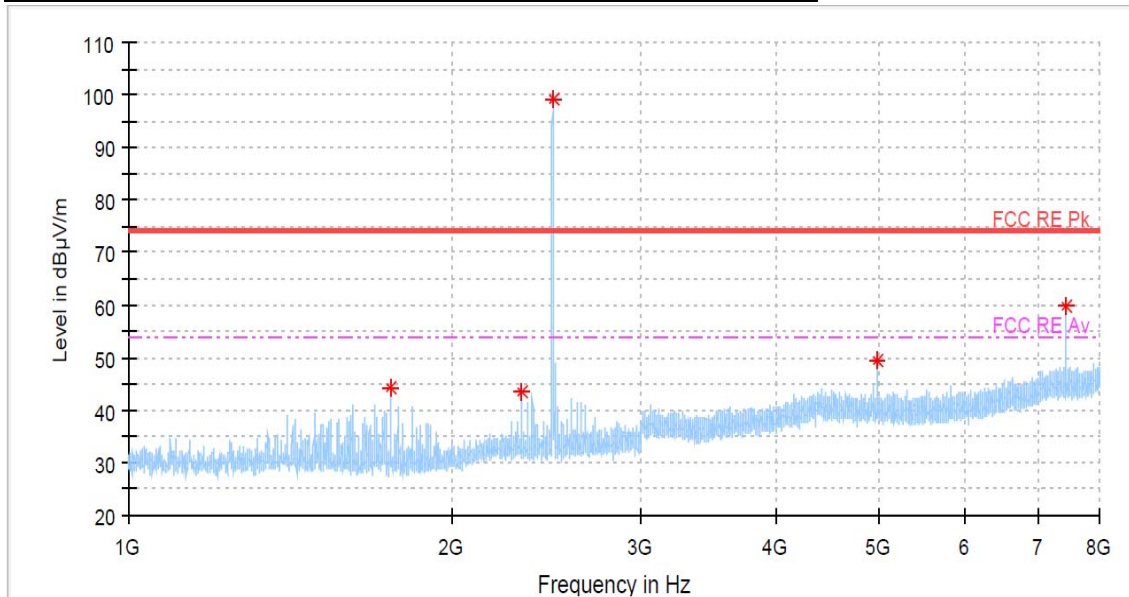


## Worst Case : 2480 MHz GFSK modulation : 8 GHz to 18 GHz

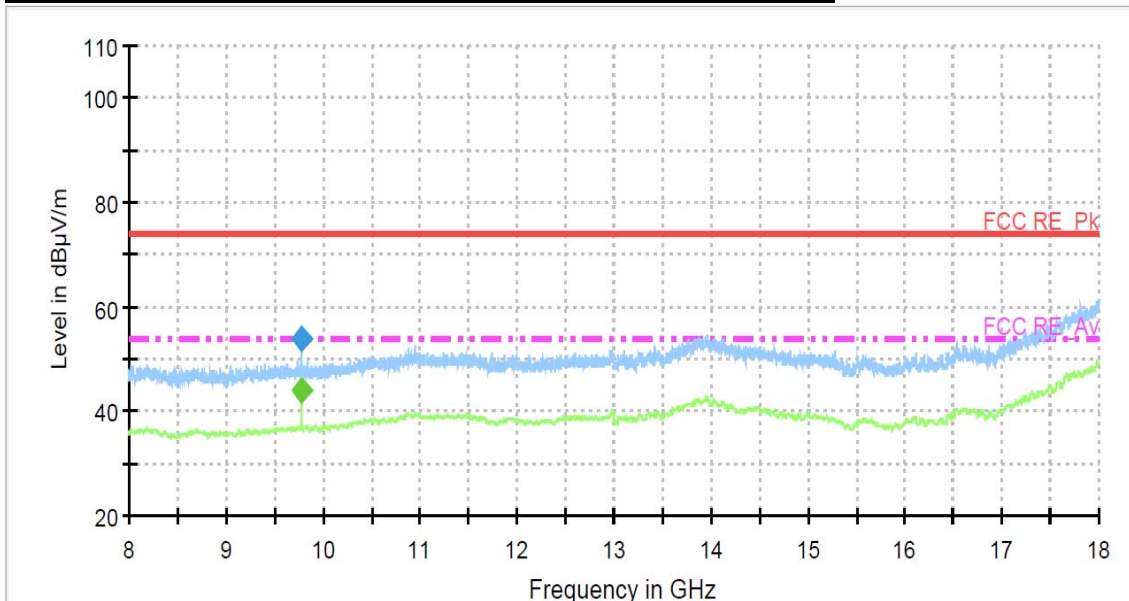


# PLOTS OF EMISSIONS

## Worst Case : 2480 MHz GFSK modulation : 18 GHz to 26.5 GHz

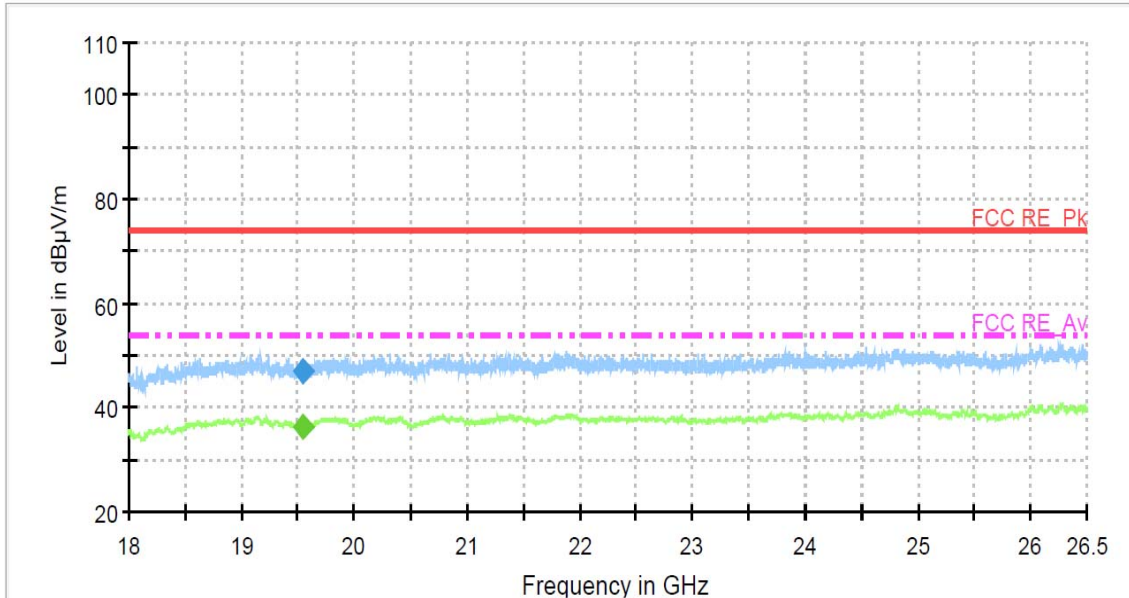

## Worst Case : 2480 MHz GFSK modulation : 3<sup>rd</sup> Harmonic Av

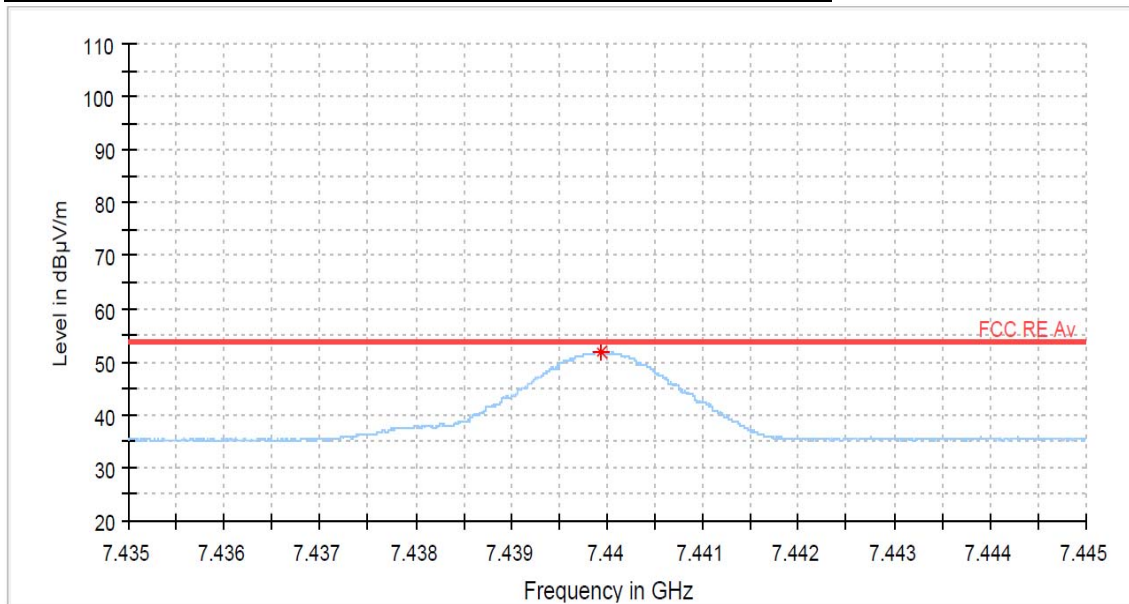

## TEST DATA

### 8.9 Radiated Bandedge

#### FCC §15.247(d), IC RSS-247 Issue 2, 5.5

Test Mode : Set to Lowest channel, Highest channel

#### Result

##### Lowest and Highest Channels


| Frequency<br>(MHz) | Reading<br>(dBμV) | Pol*<br>(H/V) | mode | AF +CL +Amp<br>(dB)** | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------|-------------------|---------------|------|-----------------------|--------------------|-------------------|----------------|
| 2390.0             | 51.3              | H             | peak | -8.5                  | 42.8               | 74.0              | 31.2           |
| 2483.5             | 59.8              | H             | peak | -8.6                  | 51.2               | 74.0              | 22.8           |

#### Note:


- \*Pol. H = Horizontal V = Vertical
- \*\*AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
- These peak-detected results are shown to comply with the average limit, so it is not required to perform a separate average measurement.
- Other spurious was under 20 dB below Fundamental.
- GFSK modulation mode was the worst condition.
- The radiated emissions testing were made by rotating EUT through three orthogonal axes and rotating the receive antenna with horizontal, Vertical polarization. The worst data was recorded.
- Peak emissions were measured using RBW = 1 MHz, VBW = 3 MHz, Detector = Peak.
- Average emissions were measured using RBW = 1 MHz, VBW = 1kHz, Detector = Peak

# PLOT OF TEST DATA

## Restricted Band Spurious Emissions, Lowest channel(GFSK, Peak)

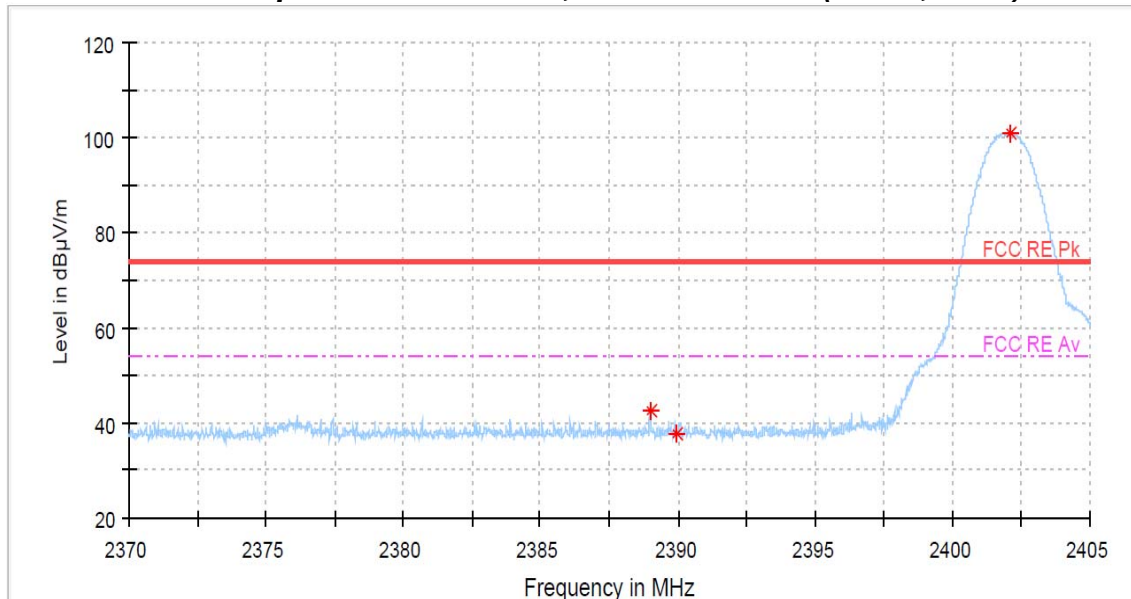

## Restricted Band Spurious Emissions, Highest channel (GFSK, Peak)

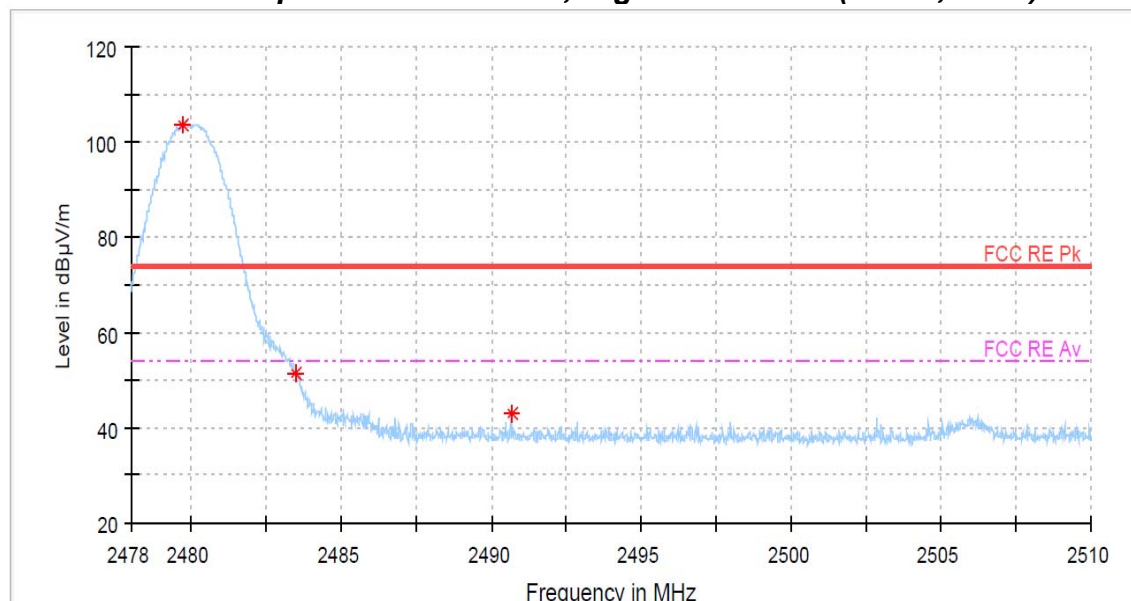

## 9. TEST EQUIPMENT

| No. | Instrument                    | Manufacturer  | Model        | Serial No.            | Calibration Date | Calibration Interval |
|-----|-------------------------------|---------------|--------------|-----------------------|------------------|----------------------|
| 1   | *Test Receiver                | R & S         | ESU 40       | 100202                | Apr. 04 2017     | 1 year               |
| 2   | Test Receiver                 | R & S         | ESCI         | 101041                | Apr. 03 2017     | 1 year               |
| 3   | *Attenuator                   | PASTERNAK     | PE7395-10    | 1441-1                | Jul. 13 2017     | 1 year               |
| 4   | *Attenuator                   | FAIRVIEW      | SA3N5W-06    | N/A                   | Jan. 09 2017     | 1 year               |
| 5   | *Attenuator                   | FAIRVIEW      | SA3N5W-10    | N/A                   | Apr. 03 2017     | 1 year               |
| 6   | Attenuator                    | WEINSCHEL     | 56-10        | 58765                 | Oct. 09 2016     | 1 year               |
| 7   | *Amplifier                    | R & S         | SCU 01       | 10029                 | Apr. 03 2017     | 1 year               |
| 8   | *Amplifier                    | R & S         | SCU18F       | 180025                | Apr. 03 2017     | 1 year               |
| 9   | *Amplifier                    | R & S         | SCU26D       | 1984522               | Apr. 11 2017     | 1 year               |
| 10  | Amplifier                     | R & S         | SCU40        | 100380                | Jul. 13 2017     | 1 year               |
| 11  | Pre Amplifier                 | HP            | 8449B        | 3008A00107            | Jan. 10 2017     | 1 year               |
| 12  | Spectrum Analyzer             | R & S         | FSW43        | 100732                | Apr. 11 2017     | 1 year               |
| 13  | *Spectrum Analyzer            | Agilent       | E4440A       | MY44022567            | Oct. 09 2016     | 1 year               |
| 14  | *Spectrum Analyzer            | R & S         | FSW43        | 104084                | Apr. 04 2017     | 1 year               |
| 15  | *Loop Antenna                 | R & S         | HFH2-Z2      | 100279                | Feb. 22 2016     | 2 year               |
| 16  | *Horn Antenna                 | SCHWARZBECK   | BBHA9120D    | 01615                 | May. 18 2017     | 2 year               |
| 17  | *Horn Antenna                 | Q-par Angus   | QSH20S20     | 8179                  | Aug. 01 2017     | 2 year               |
| 18  | Horn Antenna                  | Q-par Angus   | QSH22K20     | 8180                  | Aug. 02 2017     | 2 year               |
| 19  | *Trilog-Broadband Antenna     | SCHWARZBECK   | VULB 9163    | 9163-454              | Feb. 11 2016     | 2 year               |
| 20  | Two-Line V-Network            | R & S         | ENV216       | 101156                | Apr. 04 2017     | 1 year               |
| 21  | *Position Controller          | INNCO         | CO2000       | 12480406/L            | N/A              | N/A                  |
| 22  | *Controller                   | INNCO         | CO3000       | CO3000/937/38330516/L | N/A              | N/A                  |
| 23  | *Turn Table                   | INNCO         | DS1200S      | N/A                   | N/A              | N/A                  |
| 24  | *Turn Table                   | INNCO         | DT2000-2t    | N/A                   | N/A              | N/A                  |
| 25  | *Antenna Mast                 | INNCO         | MA4000       | N/A                   | N/A              | N/A                  |
| 26  | *TILT Antenna Mast            | INNCO         | MA4640-XP-EP | N/A                   | N/A              | N/A                  |
| 27  | *Open Switch And Control Unit | R & S         | OSP-120      | 100081                | N/A              | N/A                  |
| 28  | *Open Switch And Control Unit | R & S         | OSP-120      | 100015                | N/A              | N/A                  |
| 29  | *Shielded Room                | Seo-Young EMC | N/A          | N/A                   | N/A              | N/A                  |
| 30  | *Anechoic Chamber             | Seo-Young EMC | N/A          | N/A                   | N/A              | N/A                  |
| 31  | *WiFi Filter Bank             | R & S         | U083         | N/A                   | N/A              | N/A                  |
| 32  | *WiFi Filter Bank             | R & S         | U082         | N/A                   | N/A              | N/A                  |

\*) Test equipment used during the test

## 10. ACCURACY OF MEASUREMENT

The Measurement Uncertainties stated were calculated in accordance with the requirements of measurement uncertainty contained in CISPR 16-4-2 with the confidence level of 95%

### 1. Conducted Uncertainty Calculation

| Source of Uncertainty            | $X_i$                                                        | Uncertainty of $X_i$ |                             | Coverage factor<br>$k$ | $u(X_i)$<br>(dB) | $C_i$ | $C_i u(X_i)$<br>(dB) |
|----------------------------------|--------------------------------------------------------------|----------------------|-----------------------------|------------------------|------------------|-------|----------------------|
|                                  |                                                              | Value<br>(dB)        | Probability<br>Distribution |                        |                  |       |                      |
| Receiver reading                 | <b>RI</b>                                                    | $\pm 0.1$            | normal 1                    | 1.000                  | 0.1              | 1     | 0.1                  |
| Attenuation AMN-Receiver         | <b>LC</b>                                                    | $\pm 0.08$           | normal 2                    | 2.000                  | 0.04             | 1     | 0.04                 |
| AMN Voltage division factor      | <b>LAMN</b>                                                  | $\pm 0.8$            | normal 2                    | 2.000                  | 0.4              | 1     | 0.4                  |
| Sine wave voltage                | <b>dVSW</b>                                                  | $\pm 2.00$           | normal 2                    | 2.000                  | 1.00             | 1     | 1.00                 |
| Pulse amplitude response         | <b>dVPA</b>                                                  | $\pm 1.50$           | rectangular                 | 1.732                  | 0.87             | 1     | 0.87                 |
| Pulse repetition rate response   | <b>dVPR</b>                                                  | $\pm 1.50$           | rectangular                 | 1.732                  | 0.87             | 1     | 0.87                 |
| Noise floor proximity            | <b>dVNF</b>                                                  | $\pm 0.00$           | -                           | -                      | 0.00             | 1     | 0.00                 |
| AMN Impedance                    | <b>dZ</b>                                                    | $\pm 1.80$           | triangular                  | 2.449                  | 0.73             | 1     | 0.73                 |
| Ⓐ Mismatch                       | <b>M</b>                                                     | + 0.70               | U-Shaped                    | 1.414                  | 0.49             | 1     | 0.49                 |
| Ⓑ Mismatch                       | <b>M</b>                                                     | - 0.80               | U-Shaped                    | 1.414                  | - 0.56           | 1     | - 0.56               |
| Measurement System Repeatability | <b>RS</b>                                                    | 0.05                 | normal 1                    | 1.000                  | 0.05             | 1     | 0.05                 |
| Remark                           | Ⓐ: AMN-Receiver Mismatch : +<br>Ⓑ: AMN-Receiver Mismatch : - |                      |                             |                        |                  |       |                      |
| Combined Standard Uncertainty    | Normal                                                       |                      |                             | $\pm 1.88$             |                  |       |                      |
| Expanded Uncertainty U           | Normal ( $k = 2$ )                                           |                      |                             | $\pm 3.76$             |                  |       |                      |

## 2. Radiation Uncertainty Calculation

| Source of Uncertainty                  | $X_i$              | Uncertainty of $X_i$ |                          | Coverage factor $k$ | $u(X_i)$ (dB) | $C_i$ | $C_i u(X_i)$ (dB) |
|----------------------------------------|--------------------|----------------------|--------------------------|---------------------|---------------|-------|-------------------|
|                                        |                    | Value (dB)           | Probability Distribution |                     |               |       |                   |
| Measurement System Repeatability       | <b>RI</b>          | 0.34                 | normal 1                 | 1.00                | 0.34          | 1     | 0.34              |
| Receiver reading                       | <b>dVsw</b>        | $\pm 0.02$           | normal 2                 | 2.00                | 0.01          | 1     | 0.01              |
| Sine wave voltage                      | <b>dVpa</b>        | $\pm 0.17$           | normal 2                 | 2.00                | 0.09          | 1     | 0.09              |
| Pulse amplitude response               | <b>dVpr</b>        | $\pm 0.92$           | normal 2                 | 2.00                | 0.46          | 1     | 0.46              |
| Pulse repetition rate response         | <b>dVnf</b>        | $\pm 0.35$           | normal 2                 | 2.00                | 0.18          | 1     | 0.18              |
| Noise floor proximity                  | <b>AF</b>          | $\pm 0.50$           | normal 2                 | 2.00                | 0.25          | 1     | 0.25              |
| Antenna Factor Calibration             | <b>CL</b>          | $\pm 2.00$           | rectangular              | $\sqrt{3}$          | 1.15          | 1     | 1.15              |
| Cable Loss                             | <b>AD</b>          | $\pm 1.00$           | normal 2                 | 2.00                | 0.50          | 1     | 0.50              |
| Antenna Directivity                    | <b>AH</b>          | $\pm 0.00$           | rectangular              | $\sqrt{3}$          | 0.00          | 1     | 0.00              |
| Antenna Factor Height Dependence       | <b>AP</b>          | $\pm 2.00$           | rectangular              | $\sqrt{3}$          | 1.15          | 1     | 1.15              |
| Antenna Phase Centre Variation         | <b>AI</b>          | $\pm 0.20$           | rectangular              | $\sqrt{3}$          | 0.12          | 1     | 0.12              |
| Antenna Factor Frequency Interpolation | <b>SI</b>          | $\pm 0.25$           | rectangular              | $\sqrt{3}$          | 0.14          | 1     | 0.14              |
| Site Imperfections                     | <b>DV</b>          | $\pm 4.00$           | triangular               | $\sqrt{6}$          | 1.63          | 1     | 1.63              |
| Measurement Distance Variation         | <b>Dbal</b>        | $\pm 0.60$           | rectangular              | $\sqrt{3}$          | 0.35          | 1     | 0.35              |
| Antenna Balance                        | <b>DCross</b>      | $\pm 0.90$           | rectangular              | $\sqrt{3}$          | 0.52          | 1     | 0.52              |
| Cross Polarisation                     | <b>M</b>           | $\pm 0.00$           | rectangular              | $\sqrt{3}$          | 0.00          | 1     | 0.18              |
| Mismatch                               | <b>M</b>           | + 0.98<br>- 1.11     | U-Shaped                 | $\sqrt{2}$          | 0.74          | 1     | 0.74              |
| EUT Volume Diameter                    | <b>M</b>           | 0.33                 | normal 1                 | 1.00                | 0.33          | 1     | 0.11              |
| Remark                                 |                    |                      |                          |                     |               |       |                   |
| Combined Standard Uncertainty          | Normal             |                      |                          |                     |               |       |                   |
| Expended Uncertainty U                 | Normal ( $k = 2$ ) |                      |                          |                     |               |       |                   |