



11b_TX_CH_01_Vertical

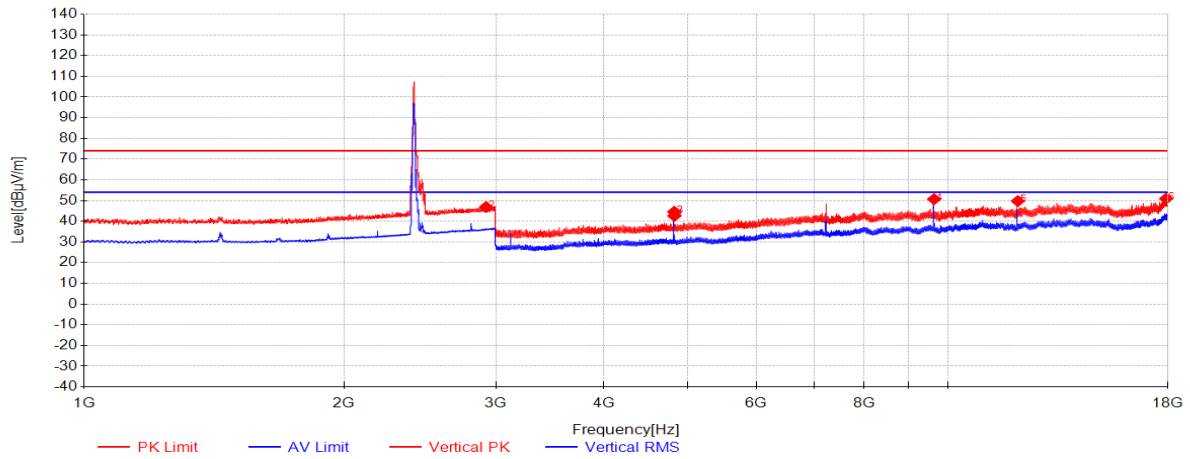


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4824.375	55.03	32.68	-45.09	42.62	54.00	11.38	Vertical
2	2920.5	41.10	29.28	-23.51	46.87	74.00	27.13	Vertical
3	4824	56.99	32.68	-45.09	44.58	74.00	29.42	Vertical
4	9647.625	50.77	38.06	-38.16	50.67	74.00	23.33	Vertical
5	12060.75	46.39	38.77	-35.41	49.75	74.00	24.25	Vertical
6	17914.125	40.58	41.45	-31.10	50.93	74.00	23.07	Vertical

11b_TX_CH_06_Horizontal

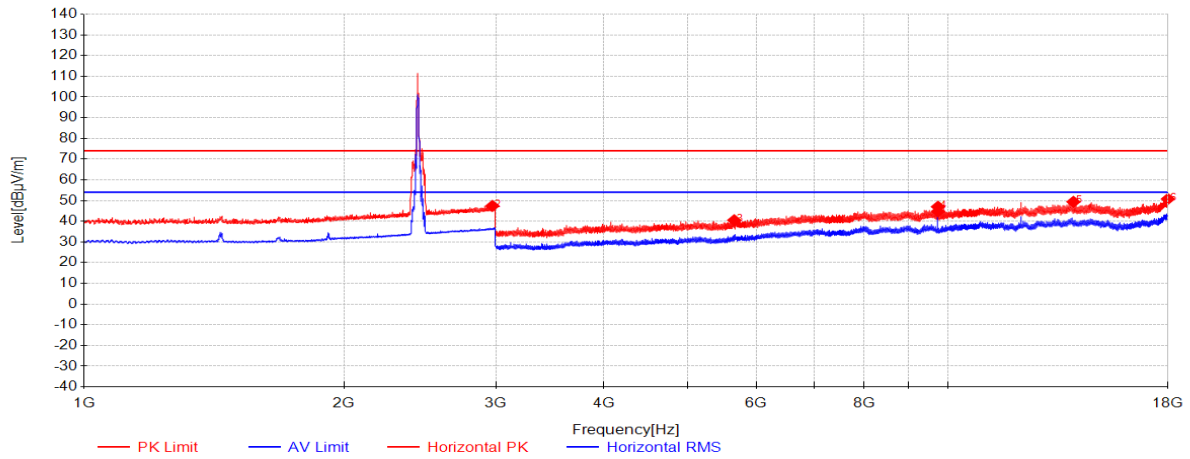


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	9748.5	44.57	38.07	-37.91	44.73	54.00	9.27	Horizontal
2	2970	41.39	29.48	-23.48	47.39	74.00	26.61	Horizontal
3	5660.625	51.27	33.48	-44.27	40.48	74.00	33.52	Horizontal
4	9748.125	46.85	38.07	-37.92	47.01	74.00	26.99	Horizontal
5	13989	44.46	40.39	-35.47	49.38	74.00	24.62	Horizontal
6	18000	40.09	41.70	-31.02	50.77	74.00	23.23	Horizontal

11b_TX_CH_06_Vertical

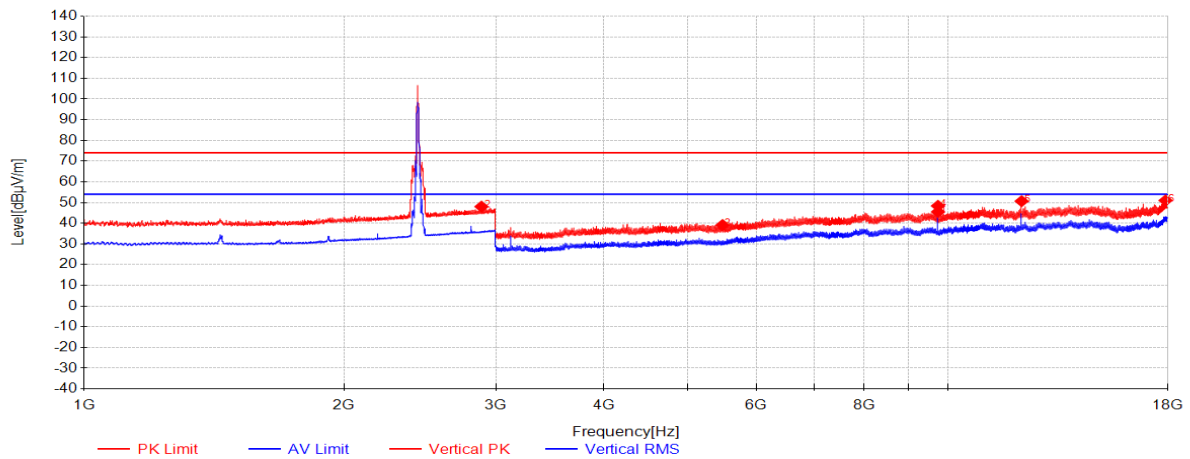


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	9748.5	45.32	38.07	-37.91	45.48	54.00	8.52	Vertical
2	2885	42.48	29.14	-23.61	48.01	74.00	25.99	Vertical
3	5487.375	50.61	33.00	-44.49	39.13	74.00	34.87	Vertical
4	9747.75	48.21	38.07	-37.92	48.37	74.00	25.63	Vertical
5	12183.375	47.22	38.92	-35.47	50.67	74.00	23.33	Vertical
6	17884.5	40.66	41.37	-31.01	51.01	74.00	22.99	Vertical

11b_TX_CH_11_Horizontal

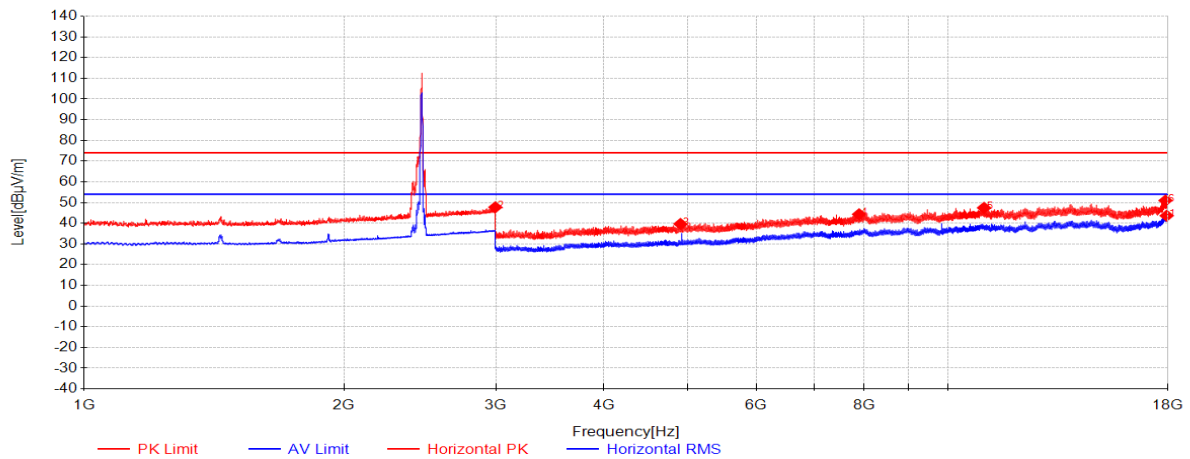


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17938.875	33.19	41.52	-31.08	43.64	54.00	10.36	Horizontal
2	2993	41.61	29.57	-23.46	47.72	74.00	26.28	Horizontal
3	4904.625	51.64	32.87	-44.83	39.68	74.00	34.32	Horizontal
4	7897.5	48.65	37.10	-41.41	44.33	74.00	29.67	Horizontal
5	11020.5	44.19	39.29	-36.03	47.45	74.00	26.55	Horizontal
6	17881.5	40.62	41.36	-31.00	50.98	74.00	23.02	Horizontal

11b_TX_CH_11_Vertical

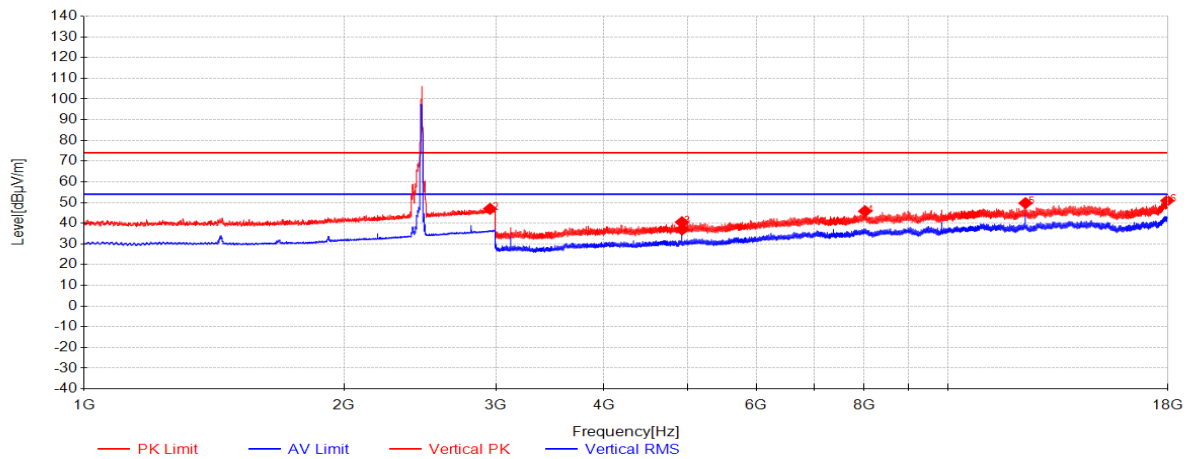


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4924.5	48.92	32.92	-44.84	37.00	54.00	17.00	Vertical
2	2951	41.06	29.40	-23.49	46.97	74.00	27.03	Vertical
3	4924.125	52.41	32.92	-44.84	40.49	74.00	33.51	Vertical
4	8025	49.69	37.32	-41.19	45.82	74.00	28.18	Vertical
5	12310.125	45.43	39.07	-34.78	49.73	74.00	24.27	Vertical
6	17968.5	40.34	41.61	-31.05	50.90	74.00	23.10	Vertical

11n(HT20)_TX_CH_01_Horizontal

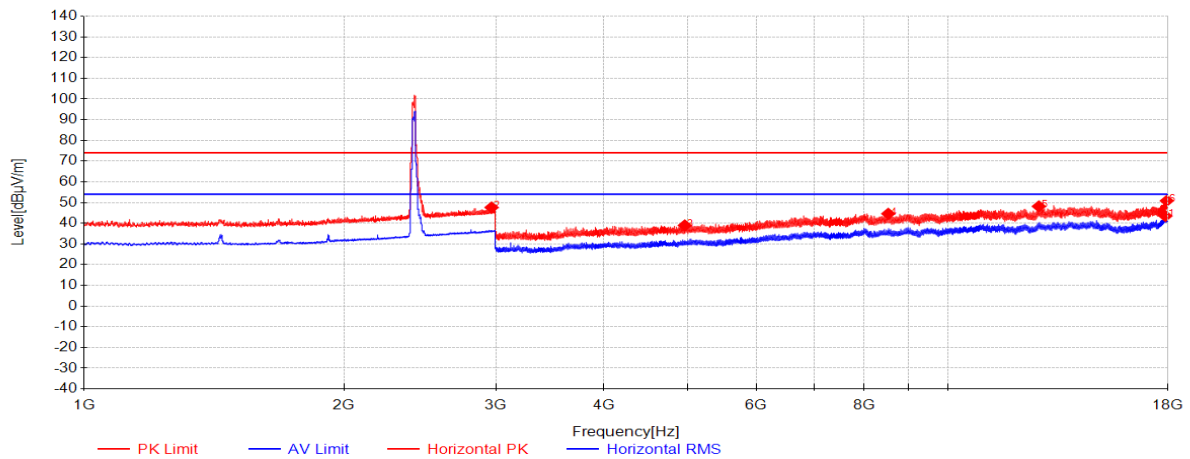


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17877.375	33.13	41.34	-30.97	43.50	54.00	10.50	Horizontal
2	2963.5	41.65	29.45	-23.48	47.62	74.00	26.38	Horizontal
3	4961.625	50.78	33.01	-44.85	38.94	74.00	35.06	Horizontal
4	8536.125	47.19	37.68	-40.28	44.59	74.00	29.41	Horizontal
5	12757.125	43.54	39.61	-35.00	48.15	74.00	25.85	Horizontal
6	17944.5	40.37	41.54	-31.07	50.84	74.00	23.16	Horizontal

11n(HT20)_TX_CH_01_Vertical

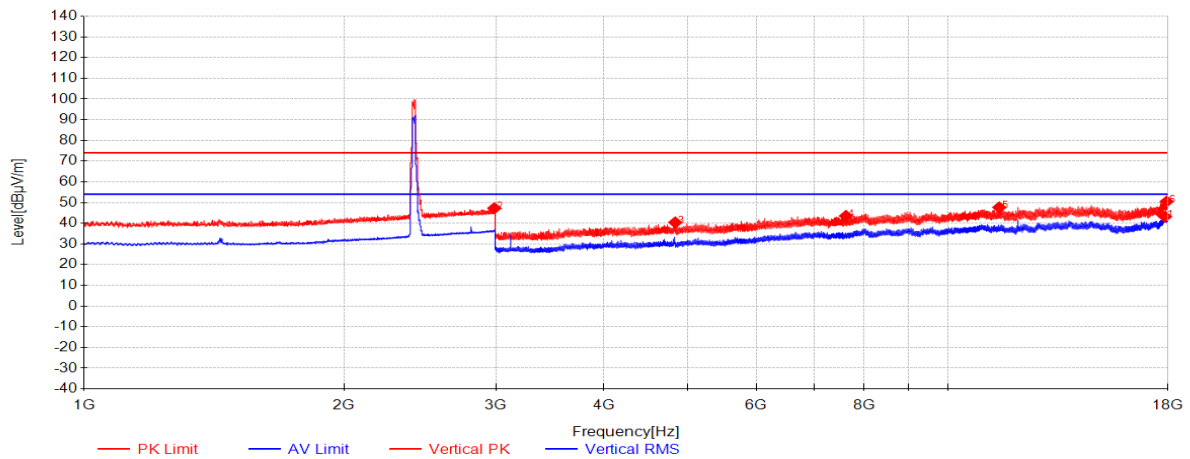


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17859.375	32.78	41.29	-30.86	43.21	54.00	10.79	Vertical
2	2985.5	41.19	29.54	-23.47	47.26	74.00	26.74	Vertical
3	4836.75	52.74	32.71	-45.05	40.40	74.00	33.60	Vertical
4	7626	48.81	36.55	-41.83	43.53	74.00	30.47	Vertical
5	11477.25	44.66	39.01	-36.01	47.66	74.00	26.34	Vertical
6	17936.625	40.03	41.52	-31.08	50.47	74.00	23.53	Vertical

11n(HT20)_TX_CH_06_Horizontal

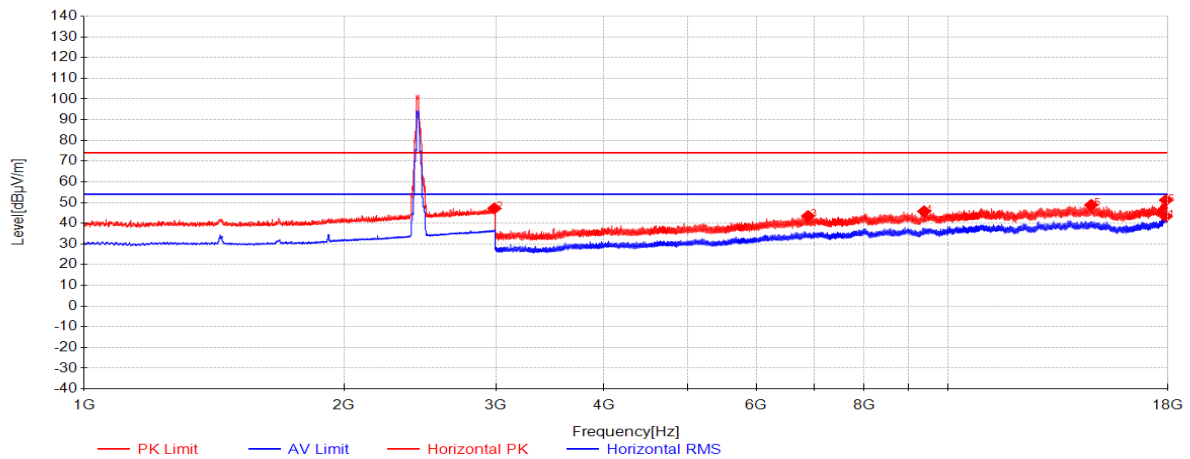


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17895.75	33.04	41.40	-31.08	43.35	54.00	10.65	Horizontal
2	2985.5	41.08	29.54	-23.47	47.15	74.00	26.85	Horizontal
3	6892.125	50.13	36.13	-42.75	43.51	74.00	30.49	Horizontal
4	9394.125	46.53	38.04	-38.84	45.73	74.00	28.27	Horizontal
5	14671.125	42.60	40.00	-33.79	48.81	74.00	25.19	Horizontal
6	17907	40.83	41.43	-31.10	51.16	74.00	22.84	Horizontal

11n(HT20)_TX_CH_06_Vertical

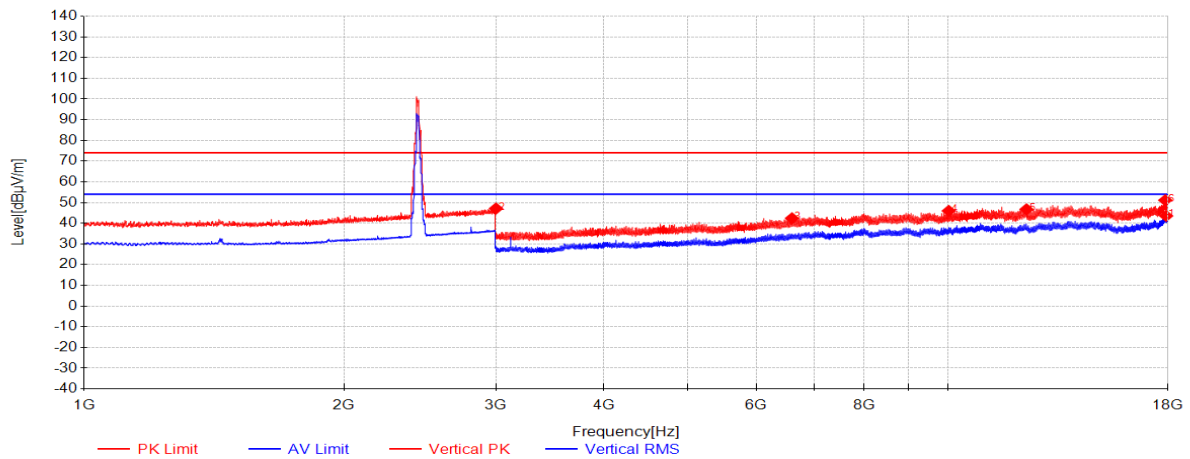


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17912.25	33.19	41.45	-31.10	43.54	54.00	10.46	Vertical
2	2998.5	40.99	29.59	-23.46	47.12	74.00	26.88	Vertical
3	6603.375	49.91	35.67	-43.18	42.39	74.00	31.61	Vertical
4	10032.375	45.35	38.14	-37.54	45.95	74.00	28.05	Vertical
5	12344.25	42.53	39.11	-34.93	46.71	74.00	27.29	Vertical
6	17869.5	40.73	41.32	-30.92	51.13	74.00	22.87	Vertical

11n(HT20)_TX_CH_11_Horizontal

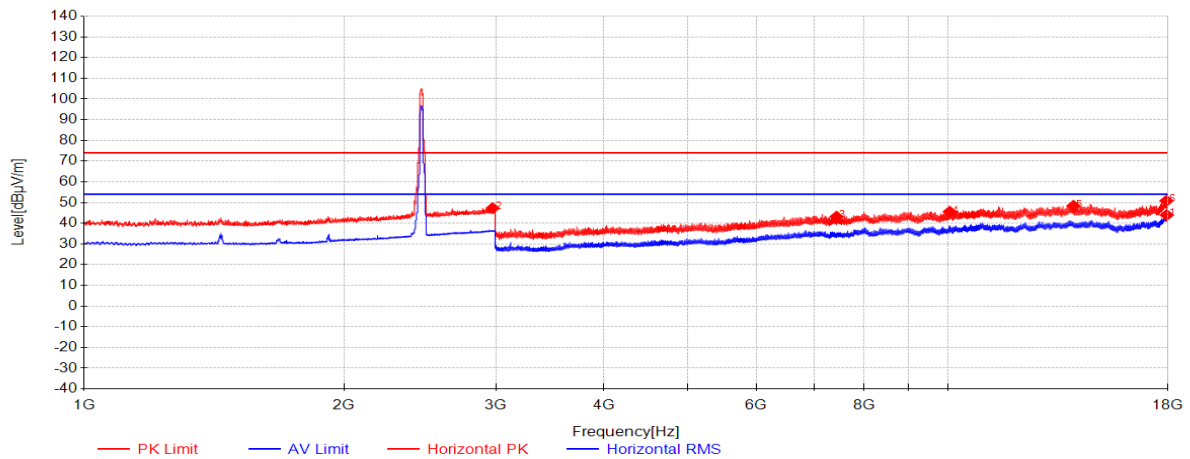


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17941.125	33.47	41.53	-31.07	43.93	54.00	10.07	Horizontal
2	2972	41.25	29.49	-23.48	47.26	74.00	26.74	Horizontal
3	7438.5	49.28	36.30	-42.42	43.16	74.00	30.84	Horizontal
4	10056	44.88	38.17	-37.53	45.52	74.00	28.48	Horizontal
5	13987.875	43.43	40.39	-35.46	48.36	74.00	25.64	Horizontal
6	17928	40.42	41.49	-31.08	50.83	74.00	23.17	Horizontal

11n(HT20)_TX_CH_11_Vertical

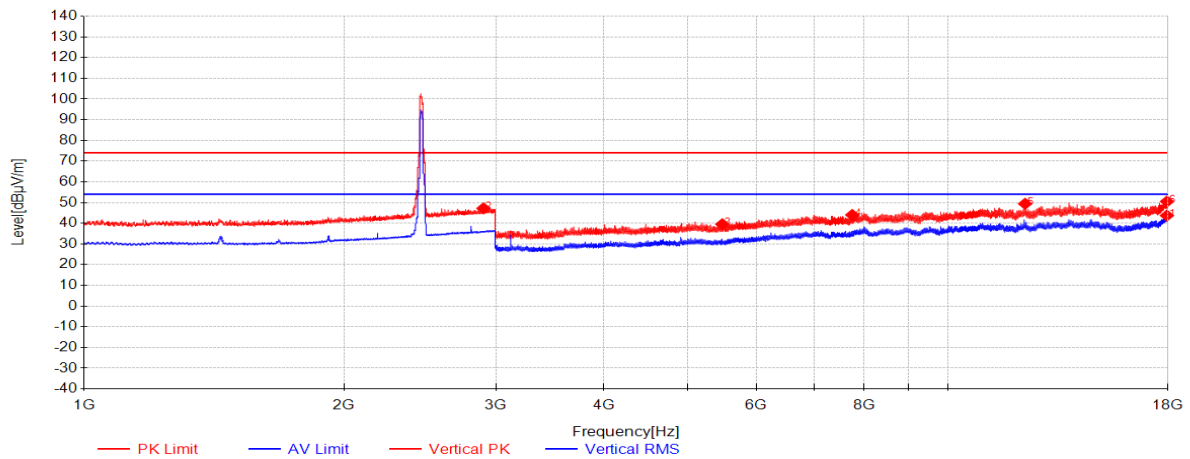


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17949.375	33.23	41.55	-31.07	43.72	54.00	10.28	Vertical
2	2900.5	41.50	29.20	-23.52	47.18	74.00	26.82	Vertical
3	5483.625	51.00	33.00	-44.49	39.51	74.00	34.49	Vertical
4	7755	48.66	36.81	-41.46	44.01	74.00	29.99	Vertical
5	12298.5	45.08	39.06	-34.74	49.40	74.00	24.60	Vertical
6	17954.625	40.00	41.57	-31.06	50.51	74.00	23.49	Vertical

11n(HT40)_TX_CH_03_Horizontal

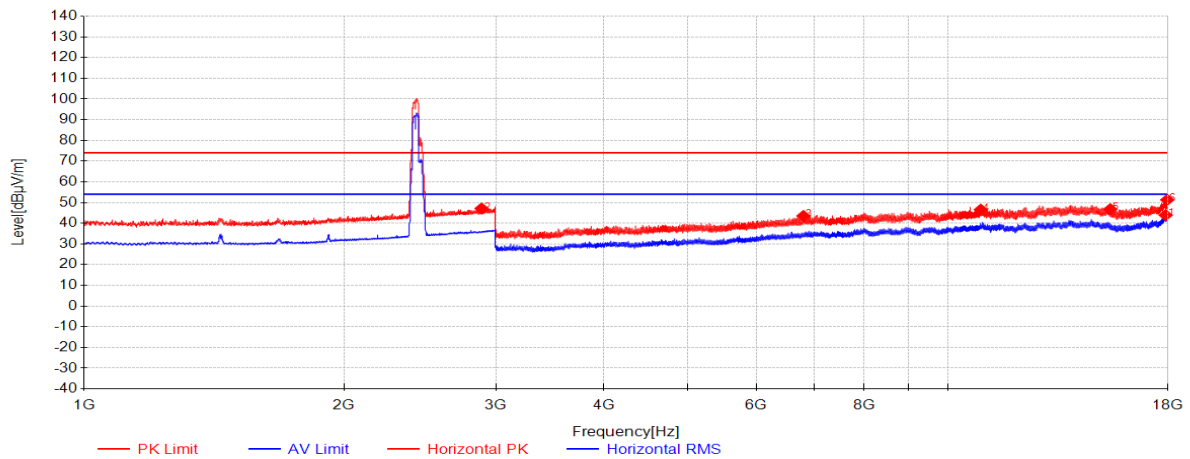


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17889.375	33.58	41.38	-31.04	43.92	54.00	10.08	Horizontal
2	2885.5	41.58	29.14	-23.61	47.12	74.00	26.88	Horizontal
3	6808.5	50.66	35.99	-43.14	43.51	74.00	30.49	Horizontal
4	10926	43.71	39.21	-36.38	46.54	74.00	27.46	Horizontal
5	15433.125	41.76	39.02	-33.97	46.81	74.00	27.19	Horizontal
6	17963.25	40.76	41.59	-31.05	51.30	74.00	22.70	Horizontal

11n(HT40)_TX_CH_03_Vertical

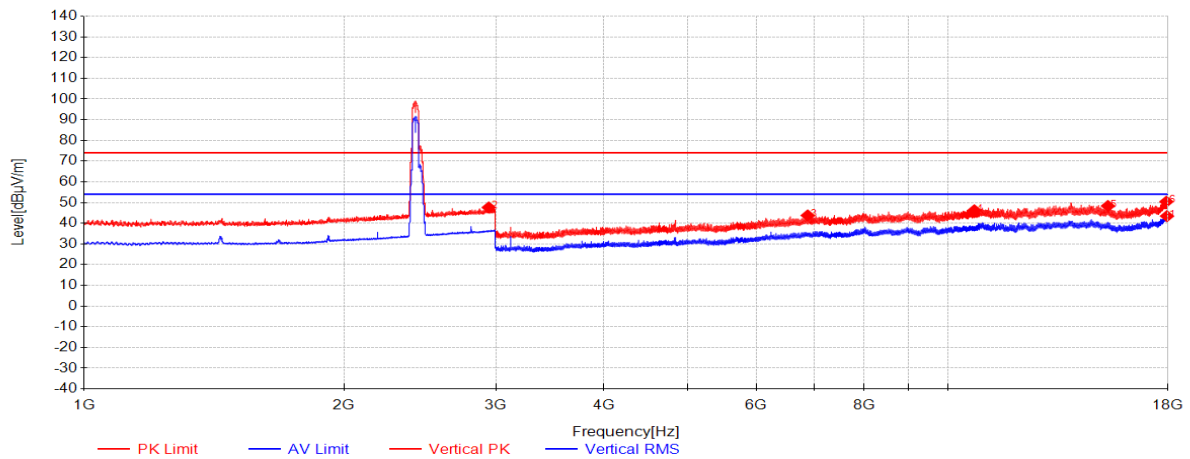


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17955	32.93	41.57	-31.06	43.44	54.00	10.56	Vertical
2	2941.5	41.76	29.37	-23.50	47.63	74.00	26.37	Vertical
3	6886.125	50.44	36.12	-42.78	43.78	74.00	30.22	Vertical
4	10739.625	43.78	38.99	-36.50	46.27	74.00	27.73	Vertical
5	15337.125	42.72	39.19	-33.57	48.34	74.00	25.66	Vertical
6	17926.5	40.02	41.49	-31.09	50.42	74.00	23.58	Vertical

11n(HT40)_TX_CH_06_Horizontal

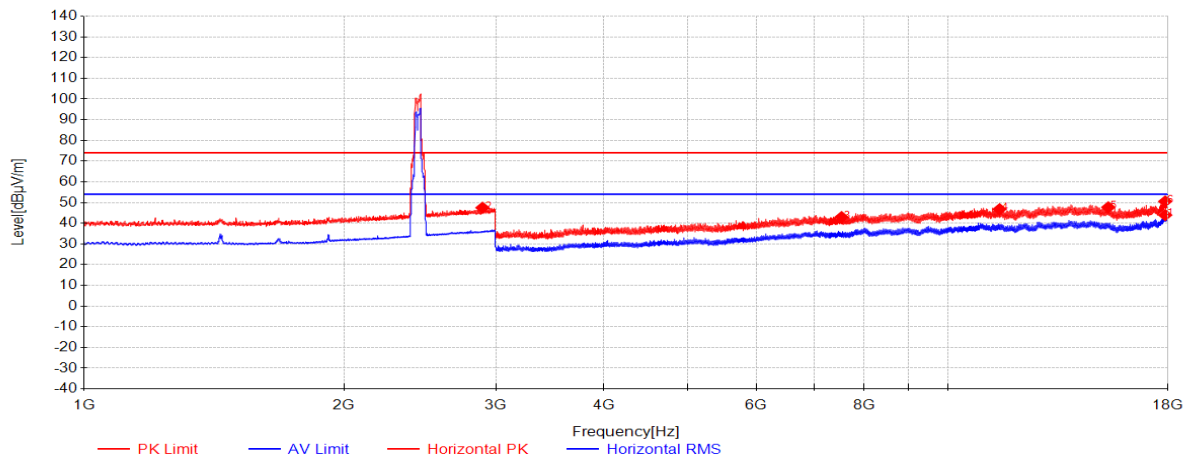


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17868.375	33.53	41.32	-30.91	43.93	54.00	10.07	Horizontal
2	2893	41.88	29.17	-23.56	47.49	74.00	26.51	Horizontal
3	7537.875	48.70	36.38	-42.09	42.98	74.00	31.02	Horizontal
4	11487	43.76	39.01	-35.98	46.79	74.00	27.21	Horizontal
5	15352.125	42.22	39.17	-33.67	47.72	74.00	26.28	Horizontal
6	17866.5	40.15	41.31	-30.90	50.56	74.00	23.44	Horizontal

11n(HT40)_TX_CH_06_Vertical

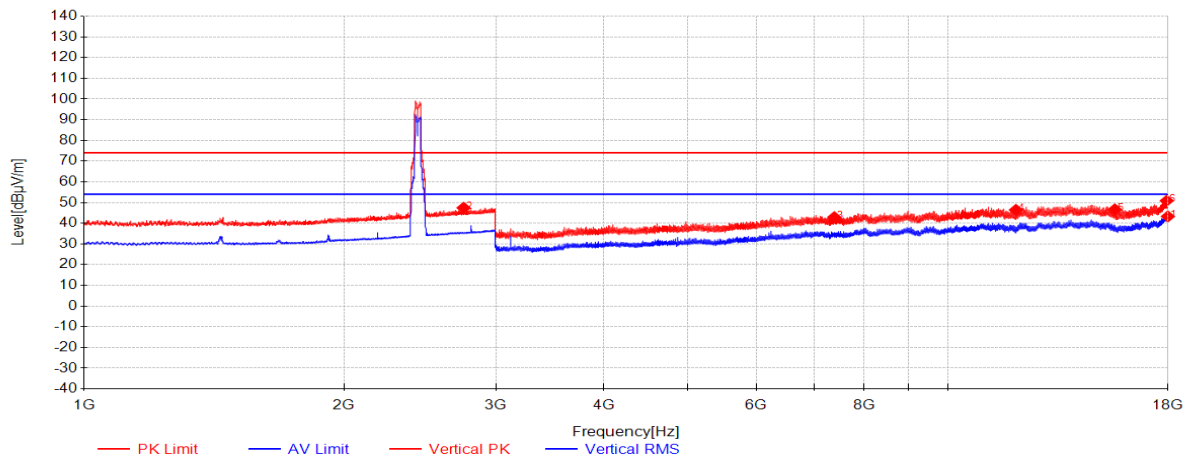


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17998.125	32.62	41.69	-31.02	43.29	54.00	10.71	Vertical
2	2751	43.04	28.60	-24.20	47.44	74.00	26.56	Vertical
3	7392.375	49.07	36.30	-42.46	42.91	74.00	31.09	Vertical
4	11998.875	43.73	38.70	-36.00	46.43	74.00	27.57	Vertical
5	15622.5	41.29	38.68	-33.28	46.69	74.00	27.31	Vertical
6	17940.75	40.43	41.53	-31.07	50.88	74.00	23.12	Vertical

11n(HT40)_TX_CH_09_Horizontal

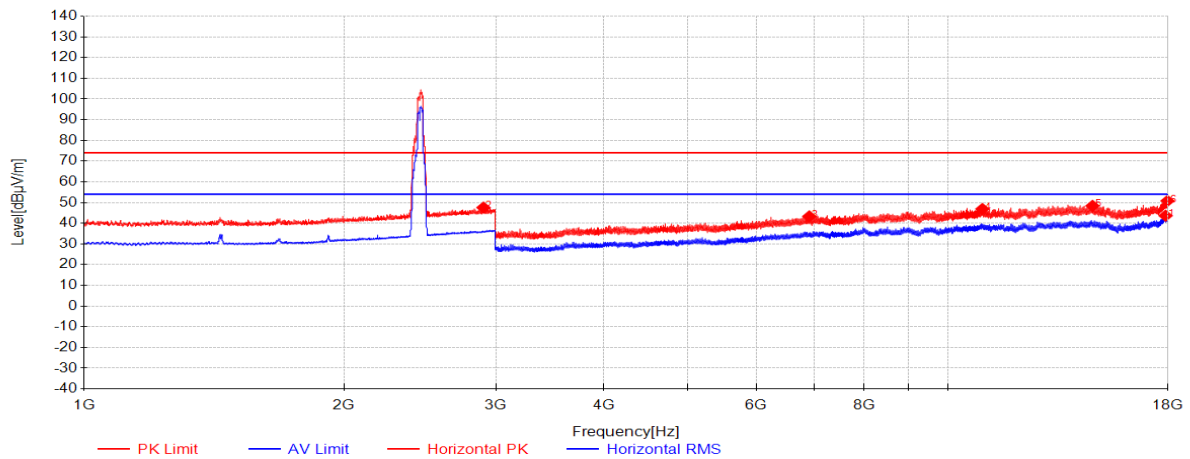


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17886.375	33.29	41.37	-31.03	43.63	54.00	10.37	Horizontal
2	2900	41.90	29.20	-23.52	47.58	74.00	26.42	Horizontal
3	6915	49.95	36.16	-42.79	43.33	74.00	30.67	Horizontal
4	10972.5	43.81	39.27	-36.15	46.92	74.00	27.08	Horizontal
5	14719.5	42.05	39.97	-33.62	48.40	74.00	25.60	Horizontal
6	17978.25	40.20	41.64	-31.04	50.80	74.00	23.20	Horizontal

11n(HT40)_TX_CH_09_Vertical

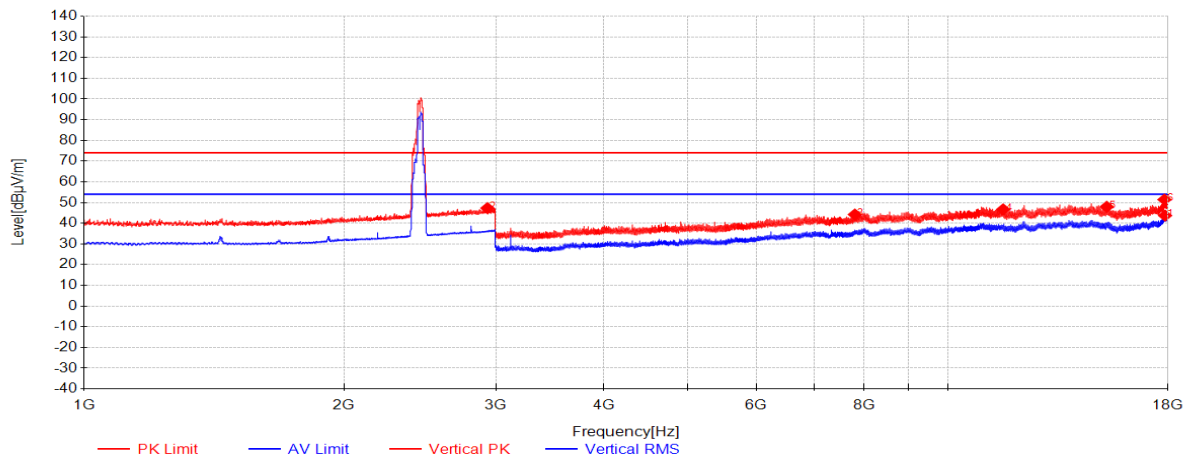


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17862.75	33.29	41.30	-30.88	43.71	54.00	10.29	Vertical
2	2931	41.49	29.32	-23.50	47.31	74.00	26.69	Vertical
3	7810.125	48.37	36.92	-41.09	44.20	74.00	29.80	Vertical
4	11598	43.30	38.94	-35.55	46.69	74.00	27.31	Vertical
5	15289.5	42.04	39.28	-33.37	47.95	74.00	26.05	Vertical
6	17833.875	40.89	41.22	-30.70	51.41	74.00	22.59	Vertical

11be(EHT20)_TX_CH_01_Horizontal

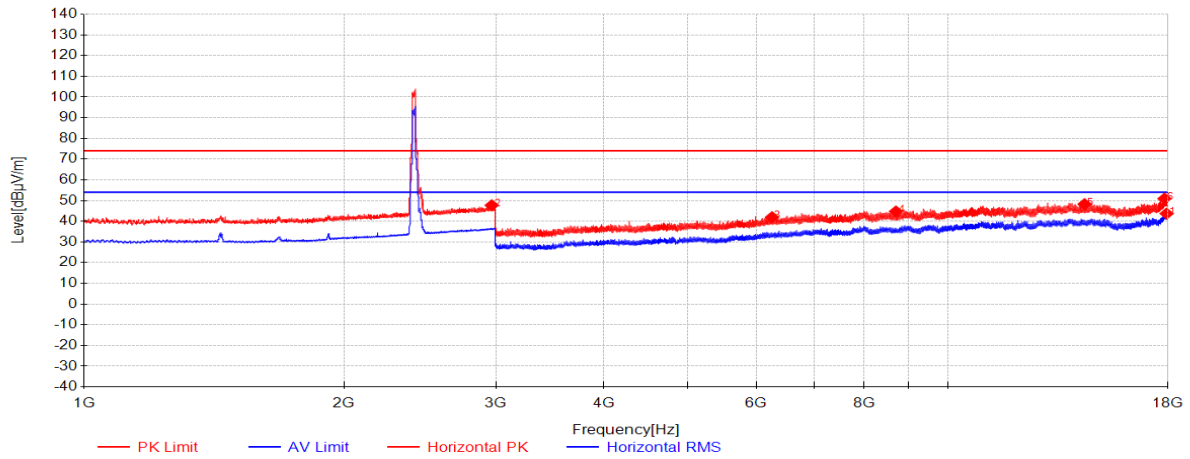


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17935.875	33.26	41.51	-31.08	43.70	54.00	10.30	Horizontal
2	2964.5	41.73	29.46	-23.48	47.71	74.00	26.29	Horizontal
3	6261.75	50.74	35.02	-43.81	41.96	74.00	32.04	Horizontal
4	8712.75	46.94	37.80	-40.01	44.73	74.00	29.27	Horizontal
5	14410.125	42.64	40.15	-34.53	48.26	74.00	25.74	Horizontal
6	17835	40.40	41.22	-30.71	50.91	74.00	23.09	Horizontal

11be(EHT20)_TX_CH_01_Vertical

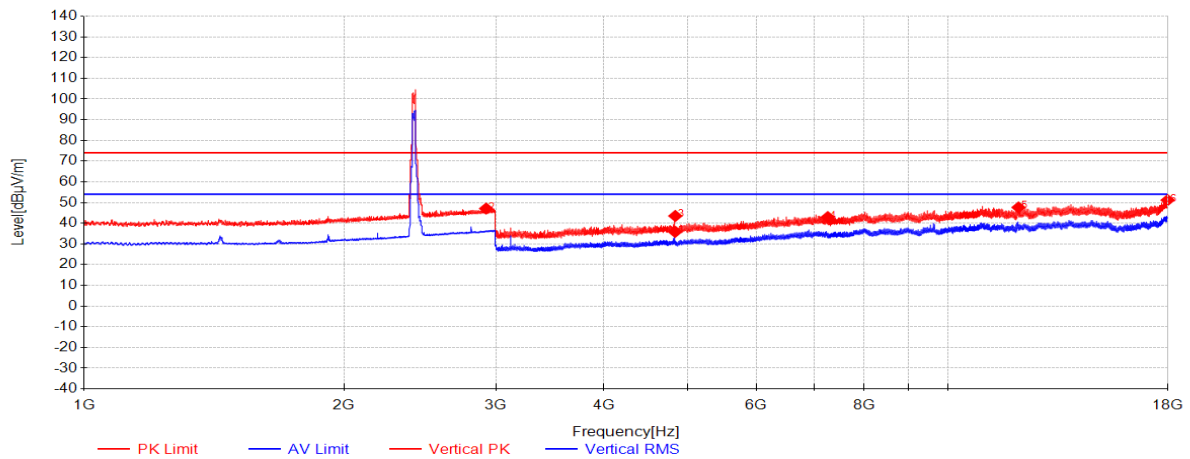


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4834.5	48.16	32.70	-45.05	35.81	54.00	18.19	Vertical
2	2921	41.32	29.28	-23.51	47.10	74.00	26.90	Vertical
3	4837.5	55.84	32.71	-45.04	43.51	74.00	30.49	Vertical
4	7264.5	48.93	36.30	-42.24	42.99	74.00	31.01	Vertical
5	12083.625	44.04	38.80	-35.19	47.65	74.00	26.35	Vertical
6	17986.875	40.55	41.66	-31.03	51.18	74.00	22.82	Vertical

11be(EHT20)_TX_CH_06_Horizontal

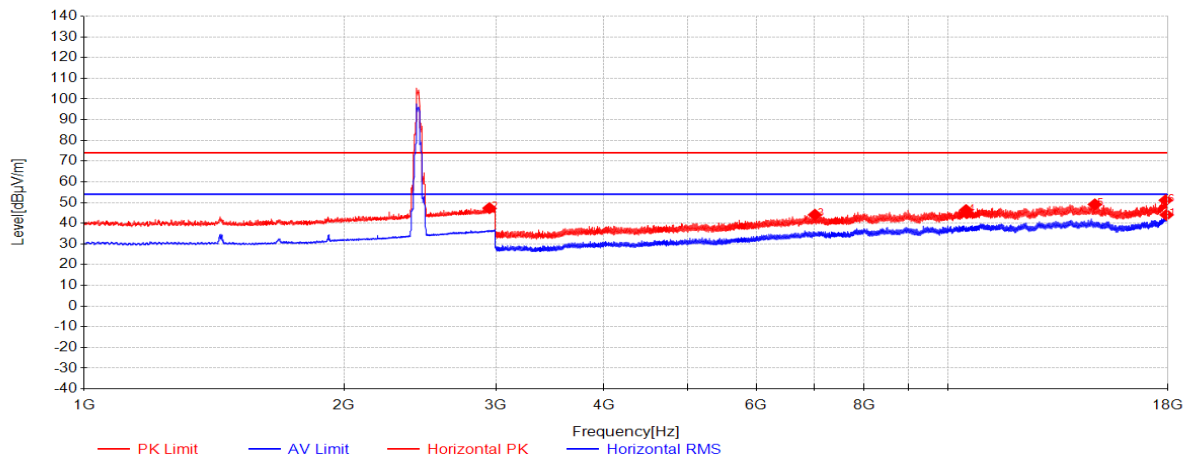


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17937.375	33.60	41.52	-31.08	44.04	54.00	9.96	Horizontal
2	2946.5	41.39	29.39	-23.49	47.28	74.00	26.72	Horizontal
3	7020	50.88	36.30	-43.10	44.08	74.00	29.92	Horizontal
4	10505.25	44.15	38.71	-36.54	46.32	74.00	27.68	Horizontal
5	14811.375	43.63	39.91	-34.45	49.09	74.00	24.91	Horizontal
6	17892.75	40.79	41.39	-31.07	51.11	74.00	22.89	Horizontal

11be(EHT20)_TX_CH_06_Vertical

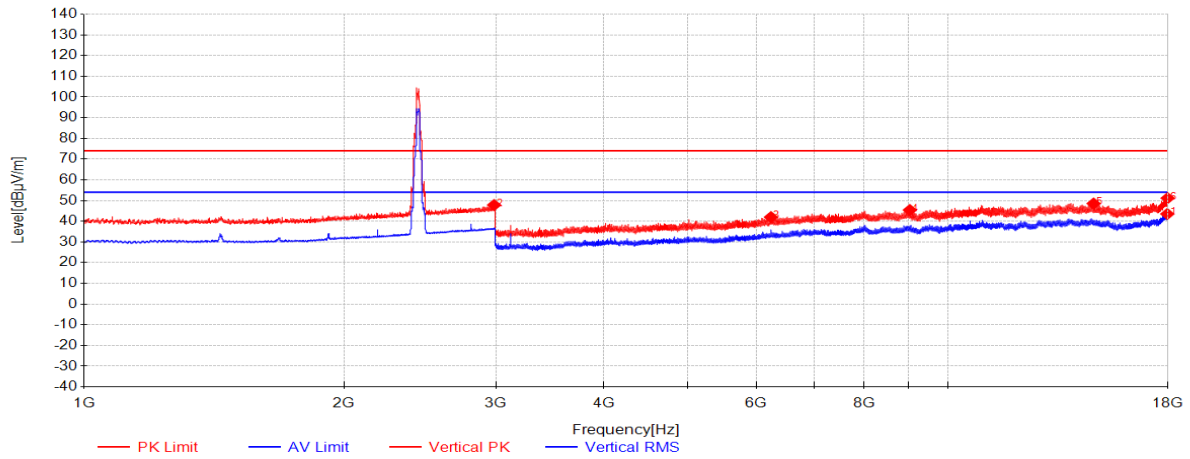


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17969.625	32.95	41.61	-31.05	43.51	54.00	10.49	Vertical
2	2983.5	41.76	29.53	-23.47	47.82	74.00	26.18	Vertical
3	6244.5	50.78	34.99	-43.79	41.98	74.00	32.02	Vertical
4	9043.5	46.94	38.00	-39.54	45.41	74.00	28.59	Vertical
5	14762.25	42.76	39.94	-34.14	48.56	74.00	25.44	Vertical
6	17985	40.54	41.66	-31.03	51.16	74.00	22.84	Vertical

11be(EHT20)_TX_CH_11_Horizontal

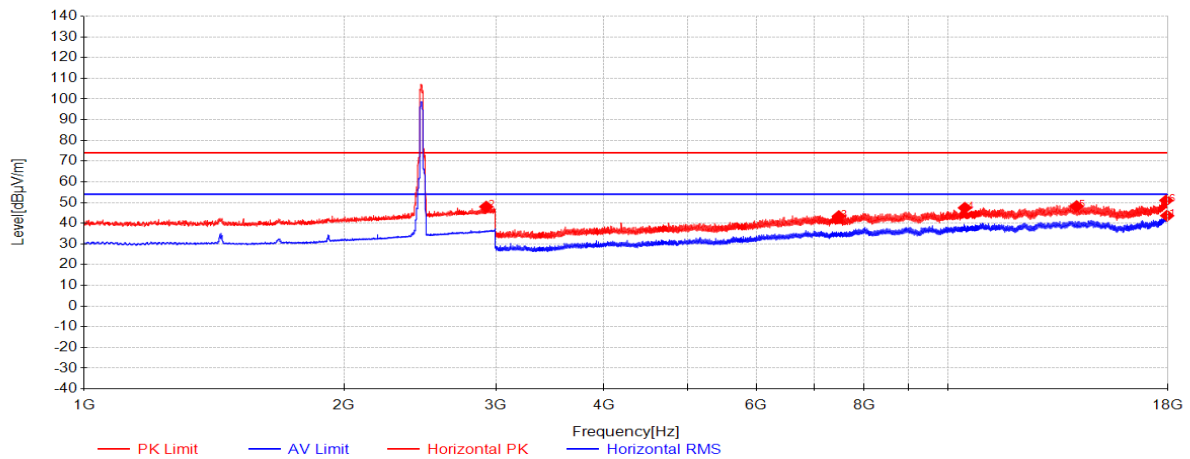


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17960.25	33.11	41.58	-31.06	43.64	54.00	10.36	Horizontal
2	2921.5	42.19	29.29	-23.51	47.97	74.00	26.03	Horizontal
3	7480.875	49.42	36.30	-42.32	43.40	74.00	30.60	Horizontal
4	10471.125	45.39	38.67	-36.62	47.43	74.00	26.57	Horizontal
5	14107.5	43.22	40.34	-35.30	48.25	74.00	25.75	Horizontal
6	17918.625	40.64	41.46	-31.09	51.01	74.00	22.99	Horizontal

11be(EHT20)_TX_CH_11_Vertical

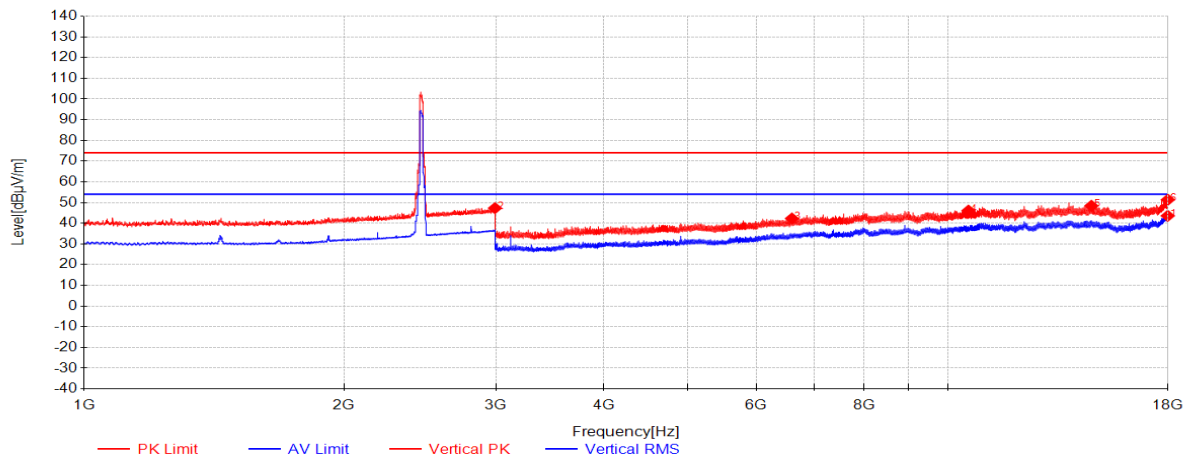


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17989.125	32.94	41.67	-31.03	43.58	54.00	10.42	Vertical
2	2990.5	41.20	29.56	-23.47	47.30	74.00	26.70	Vertical
3	6603	49.80	35.66	-43.18	42.28	74.00	31.72	Vertical
4	10573.125	44.18	38.79	-36.88	46.09	74.00	27.91	Vertical
5	14675.625	42.13	39.99	-33.73	48.40	74.00	25.60	Vertical
6	17997.375	40.68	41.69	-31.02	51.35	74.00	22.65	Vertical

11be(EHT40)_TX_CH_03_Horizontal

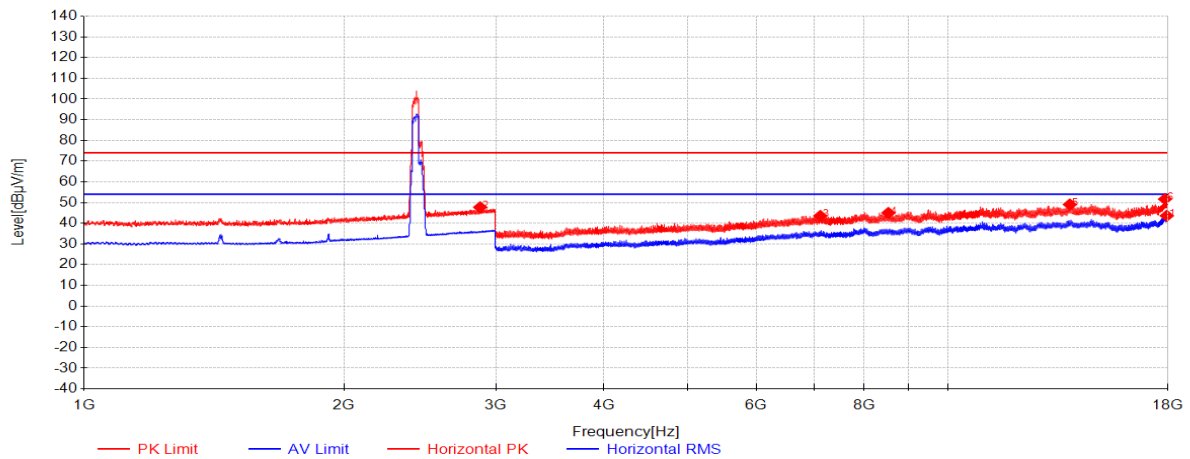


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17944.5	33.13	41.54	-31.07	43.60	54.00	10.40	Horizontal
2	2874.5	42.31	29.10	-23.67	47.74	74.00	26.26	Horizontal
3	7121.625	49.83	36.30	-42.59	43.54	74.00	30.46	Horizontal
4	8539.125	47.60	37.68	-40.27	45.01	74.00	28.99	Horizontal
5	13855.5	43.59	40.33	-34.87	49.05	74.00	24.95	Horizontal
6	17860.875	41.23	41.30	-30.87	51.66	74.00	22.34	Horizontal

11be(EHT40)_TX_CH_03_Vertical

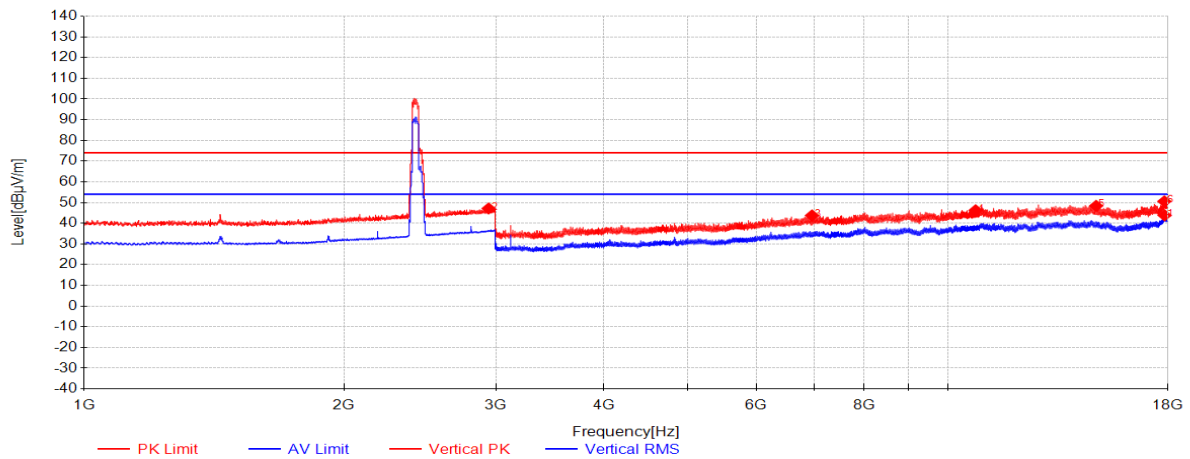


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17837.625	33.32	41.23	-30.72	43.83	54.00	10.17	Vertical
2	2940.5	41.27	29.36	-23.50	47.14	74.00	26.86	Vertical
3	6965.625	50.59	36.25	-43.05	43.78	74.00	30.22	Vertical
4	10775.25	43.96	39.03	-36.73	46.26	74.00	27.74	Vertical
5	14860.875	42.33	39.88	-33.81	48.40	74.00	25.60	Vertical
6	17827.5	40.04	41.20	-30.66	50.58	74.00	23.42	Vertical

11be(EHT40)_TX_CH_06_Horizontal

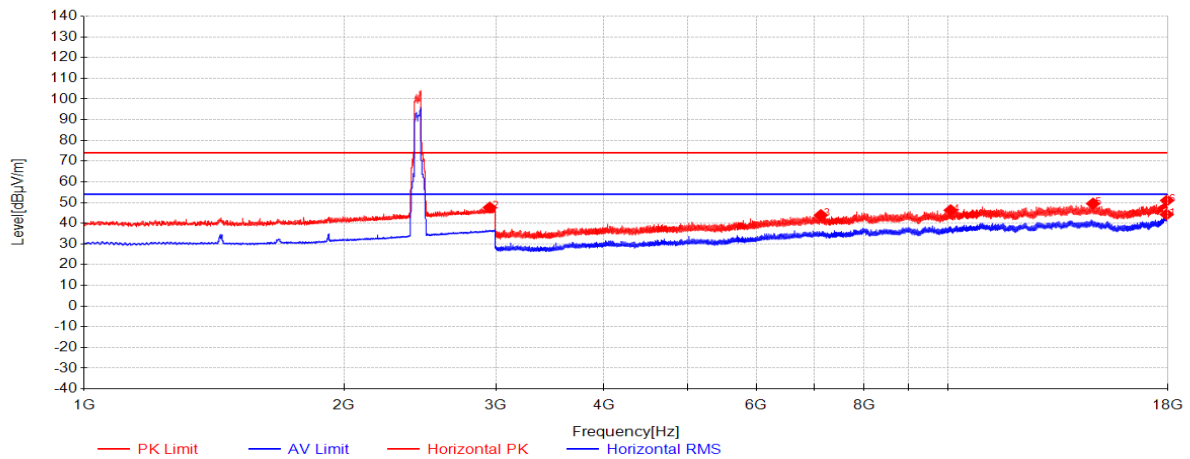


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17939.25	33.80	41.52	-31.07	44.25	54.00	9.75	Horizontal
2	2949.5	41.66	29.40	-23.49	47.57	74.00	26.43	Horizontal
3	7132.875	50.21	36.30	-42.59	43.92	74.00	30.08	Horizontal
4	10082.625	45.60	38.20	-37.52	46.28	74.00	27.72	Horizontal
5	14742.75	43.44	39.95	-33.90	49.49	74.00	24.51	Horizontal
6	17955.75	40.48	41.57	-31.06	50.99	74.00	23.01	Horizontal

11be(EHT40)_TX_CH_06_Vertical

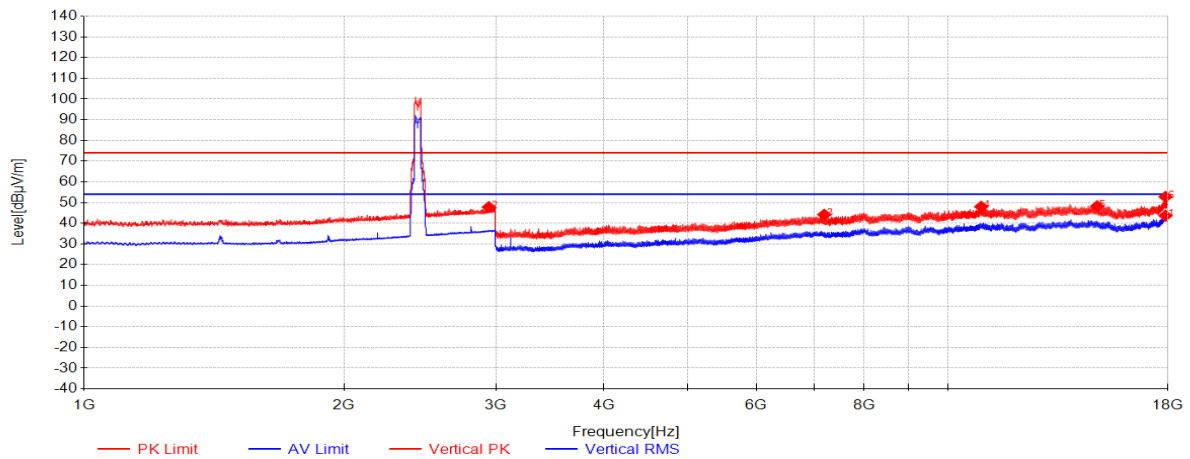


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17885.25	33.31	41.37	-31.02	43.66	54.00	10.34	Vertical
2	2942	41.92	29.37	-23.49	47.79	74.00	26.21	Vertical
3	7196.625	50.44	36.30	-42.59	44.15	74.00	29.85	Vertical
4	10938	45.09	39.23	-36.32	47.99	74.00	26.01	Vertical
5	14905.875	41.76	39.86	-33.36	48.26	74.00	25.74	Vertical
6	17884.875	42.41	41.37	-31.02	52.76	74.00	21.24	Vertical

11be(EHT40)_TX_CH_09_Horizontal

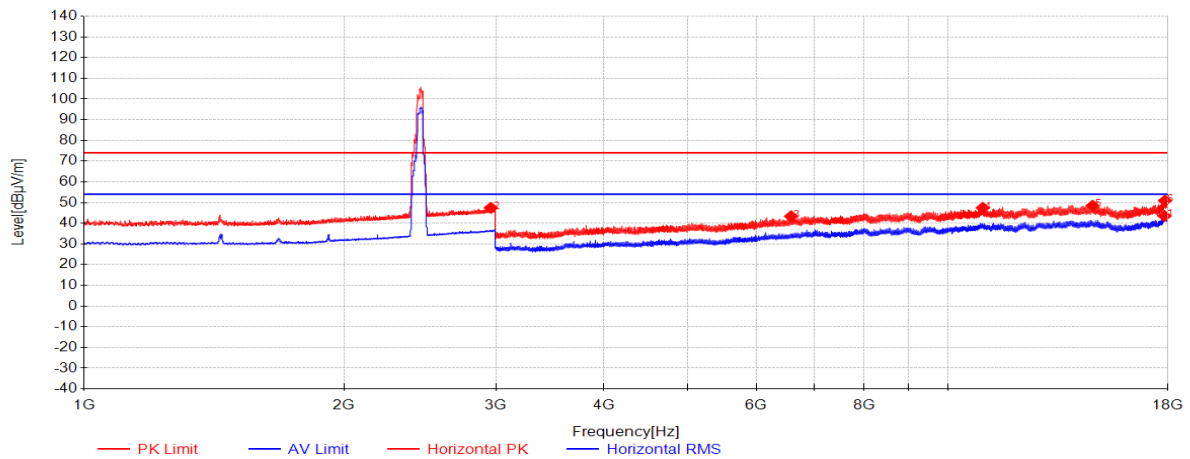


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17837.625	33.00	41.23	-30.72	43.51	54.00	10.49	Horizontal
2	2957	41.49	29.43	-23.49	47.43	74.00	26.57	Horizontal
3	6587.625	50.99	35.64	-43.27	43.36	74.00	30.64	Horizontal
4	10981.875	44.27	39.28	-36.11	47.44	74.00	26.56	Horizontal
5	14722.125	42.15	39.97	-33.65	48.47	74.00	25.53	Horizontal
6	17859	40.49	41.29	-30.86	50.93	74.00	23.07	Horizontal

11be(EHT40)_TX_CH_09_Vertical

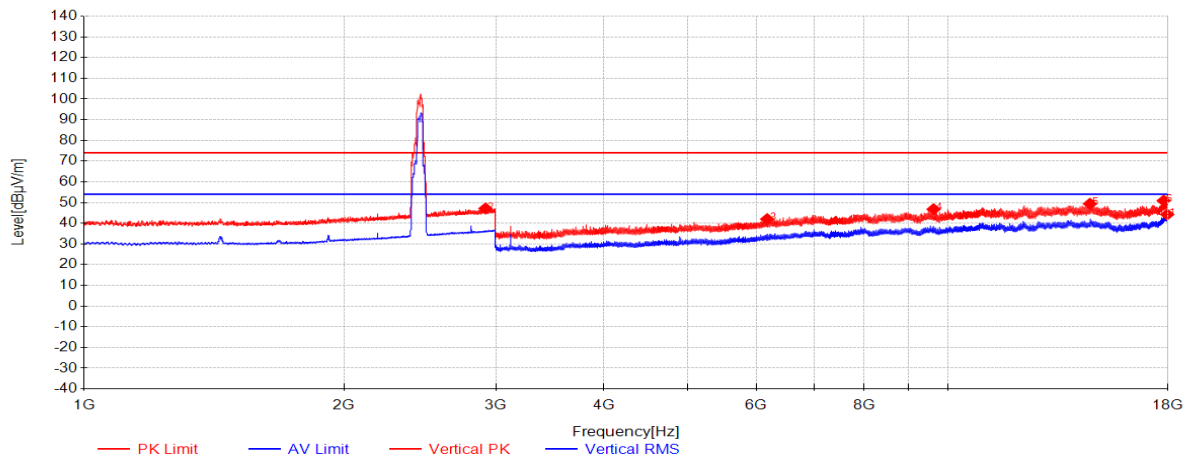


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17965.5	33.70	41.60	-31.05	44.25	54.00	9.75	Vertical
2	2915.5	41.36	29.26	-23.51	47.11	74.00	26.89	Vertical
3	6180.375	50.96	34.86	-43.82	42.00	74.00	32.00	Vertical
4	9634.125	46.89	38.06	-38.19	46.76	74.00	27.24	Vertical
5	14618.625	43.90	40.03	-34.54	49.39	74.00	24.61	Vertical
6	17794.125	40.34	41.10	-30.55	50.90	74.00	23.10	Vertical

11be(EHT40)_TX_CH_06_Horizontal

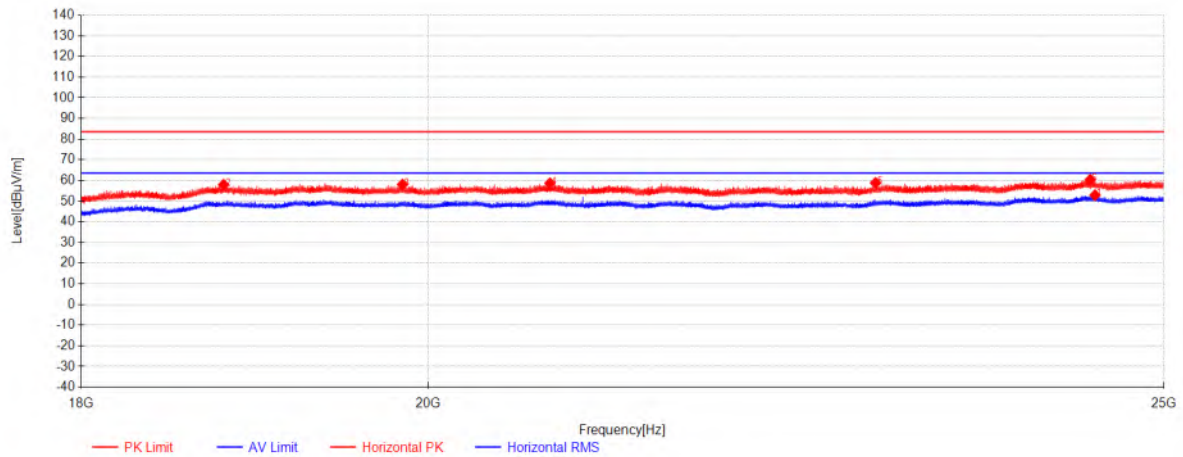

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	24481.65	37.75	39.40	-24.26	52.89	63.54	7.65	Horizontal
2	18795.375	48.08	38.17	-28.34	57.91	83.54	22.63	Horizontal
3	19843.45	47.37	38.68	-28.00	58.06	83.54	22.48	Horizontal
4	20751.175	46.75	38.32	-26.44	58.63	83.54	21.91	Horizontal
5	22905.075	45.69	38.04	-24.95	58.78	83.54	21.76	Horizontal
6	24445.6	45.07	39.39	-24.10	60.36	83.54	20.18	Horizontal

11be(EHT40)_TX_CH_06_Veritical

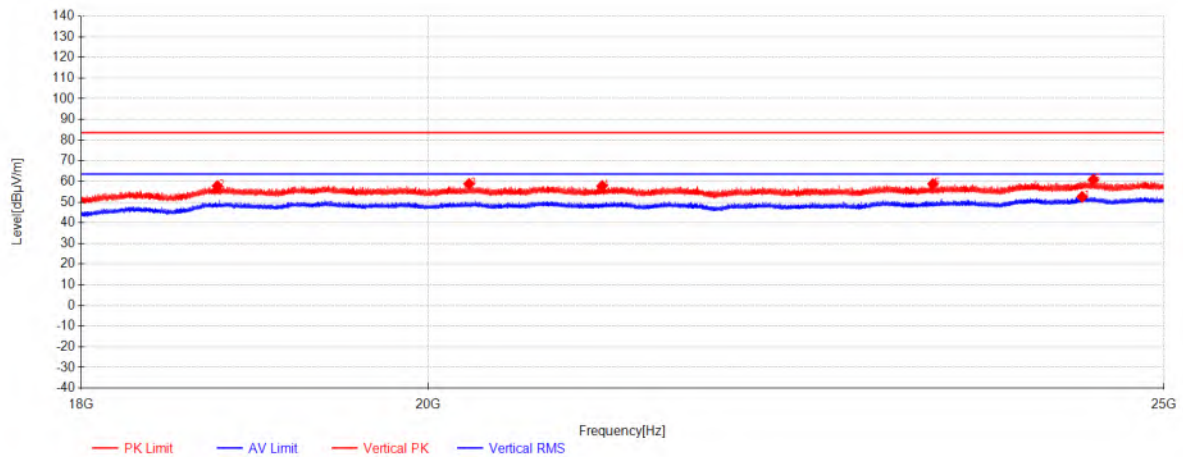

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	24386.275	37.18	39.38	-23.97	52.59	63.54	7.95	Vertical
2	18759.85	48.04	38.10	-28.33	57.81	83.54	22.73	Vertical
3	20248.05	47.59	38.58	-27.36	58.81	83.54	21.73	Vertical
4	21081.225	46.28	38.14	-26.64	57.79	83.54	22.75	Vertical
5	23307.225	45.35	38.47	-25.02	58.80	83.54	21.74	Vertical
6	24468.7	45.56	39.39	-24.20	60.75	83.54	19.79	Vertical



7.5 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2020) Section 11.9.1

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 20.4 °C


Humidity: 52.2 % RH

Atmospheric Pressure: 1001 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode(2.4G WIFI)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested. Only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

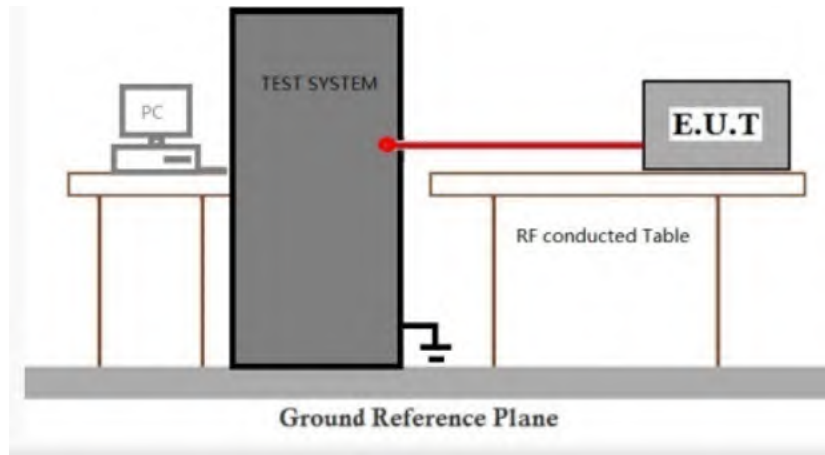

7.5.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

7.6 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)

Test Method: ANSI C63.10 (2020) Section 11.8.1

Limit: ≥ 500 kHz

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 20.4 °C


Humidity: 52.2 % RH

Atmospheric Pressure: 1001 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode(2.4G WIFI)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested. Only the data of worst case is recorded in the report.

7.6.3 Test Setup Diagram

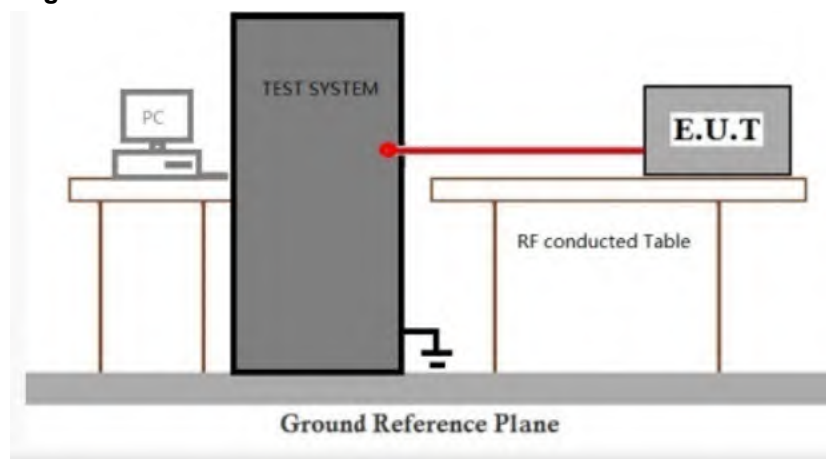

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)

Test Method: ANSI C63.10 (2020) Section 11.10.2

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 20.4 °C


Humidity: 52.2 % RH

Atmospheric Pressure: 1001 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode(2.4G WIFI)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested. Only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

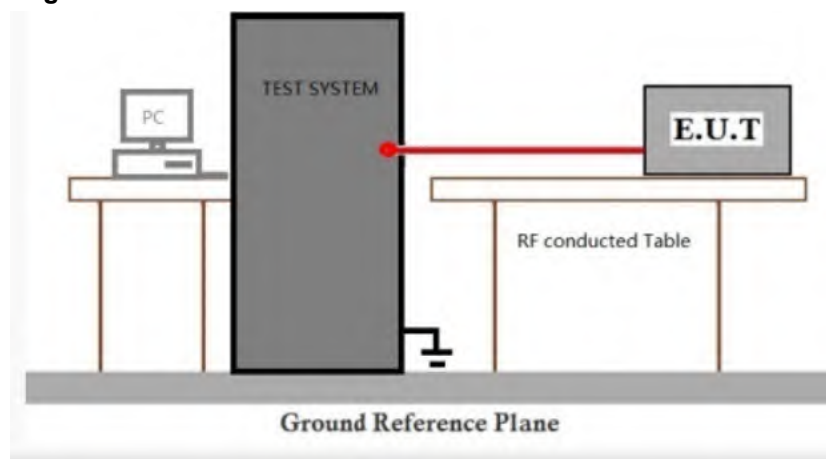

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details



7.8 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2020) Section 6.10.4

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 20.4 °C


Humidity: 52.2 % RH

Atmospheric Pressure: 1001 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode(2.4G WIFI)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested. Only the data of worst case is recorded in the report.

7.8.3 Test Setup Diagram

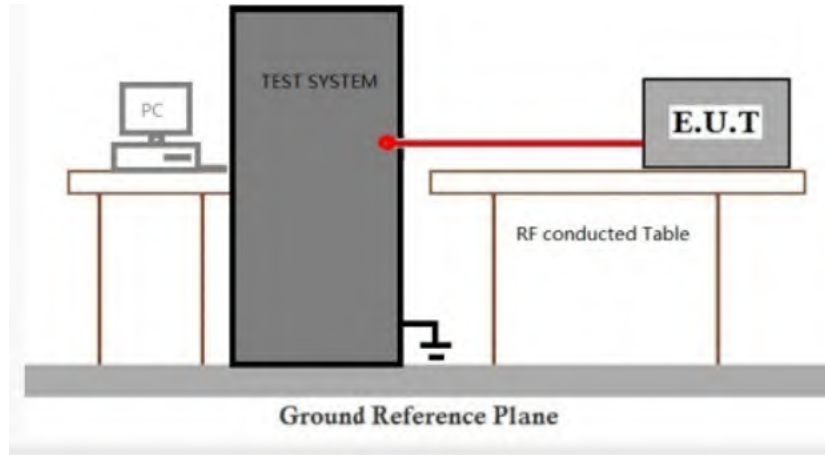

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details



7.9 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2020) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 20.4 °C


Humidity: 52.2 % RH

Atmospheric Pressure: 1001 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode(2.4G WIFI)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested. Only the data of worst case is recorded in the report.

7.9.3 Test Setup Diagram

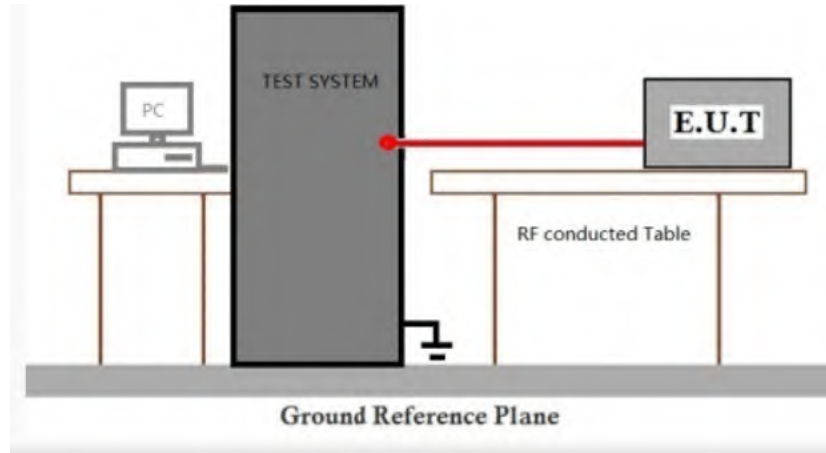

7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Report No.: SUCR251000101102

Page: 130 of 265

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for WLAN

9 EUT Constructional Details (EUT Photos)

Refer to Appendix - External Photos for SUCR2510001011MO and Appendix - Internal Photos for SUCR2510001011MO



10 Appendix

1. Duty Cycle

1.1 Test Result

1.1.1 Ant1

Ant1									
Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11b	SISO	2412	/	/	0.691	0.865	79.88	0.98	13.61
802.11g	SISO	2412	/	/	1.976	1.993	99.15	0.04	0.03
802.11n (HT20)	SISO	2412	/	/	5.428	5.610	96.76	0.14	2.08
802.11n (HT40)	SISO	2422	/	/	5.429	5.446	99.69	0.01	0.03
802.11ax (HEW20)	MIMO	2412	SU	/	5.444	5.608	97.08	0.13	1.91
802.11ax (HEW40)	MIMO	2422	SU	/	5.444	5.462	99.67	0.01	0.04
802.11be (EHT20)	MIMO	2412	SU	/	5.452	5.636	96.74	0.14	2.25
802.11be (EHT40)	MIMO	2422	SU	/	5.452	5.470	99.67	0.01	0.04



2. Bandwidth

2.1 Test Result

2.1.1 OBW

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
						Result	Limit	
802.11b	SISO	2412	/	/	1	12.687	/	Pass
		2437	/	/	1	12.579	/	Pass
		2462	/	/	1	12.815	/	Pass
802.11g	SISO	2412	/	/	1	17.821	/	Pass
		2437	/	/	1	17.795	/	Pass
		2462	/	/	1	17.852	/	Pass
802.11n (HT20)	SISO	2412	/	/	1	18.762	/	Pass
		2437	/	/	1	18.737	/	Pass
		2462	/	/	1	18.789	/	Pass
802.11n (HT40)	SISO	2422	/	/	1	37.594	/	Pass
		2437	/	/	1	37.619	/	Pass
		2452	/	/	1	37.925	/	Pass
802.11ax (HEW20)	MIMO	2412	SU	/	1	19.361	/	Pass
		2437	SU	/	1	19.350	/	Pass
		2462	SU	/	1	19.308	/	Pass
802.11ax (HEW40)	MIMO	2422	SU	/	1	38.545	/	Pass
		2437	SU	/	1	38.591	/	Pass
		2452	SU	/	1	38.727	/	Pass
802.11be (EHT20)	MIMO	2412	SU	/	1	19.429	/	Pass
		2437	SU	/	1	19.447	/	Pass
		2462	SU	/	1	19.408	/	Pass
802.11be (EHT40)	MIMO	2422	SU	/	1	38.519	/	Pass
		2437	SU	/	1	38.547	/	Pass
		2452	SU	/	1	38.696	/	Pass

2.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	6dB Bandwidth (MHz)		Verdict
						Result	Limit	
802.11b	SISO	2412	/	/	1	0.843	≥ 0.5	Pass
		2437	/	/	1	1.153	≥ 0.5	Pass
		2462	/	/	1	0.887	≥ 0.5	Pass




Report No.: SUCR251000101102

Page: 133 of 265


802.11g	SISO	2412	/	/	1	16.639	≥ 0.5	Pass
		2437	/	/	1	16.730	≥ 0.5	Pass
		2462	/	/	1	16.762	≥ 0.5	Pass
802.11n (HT20)	SISO	2412	/	/	1	17.932	≥ 0.5	Pass
		2437	/	/	1	17.759	≥ 0.5	Pass
		2462	/	/	1	17.908	≥ 0.5	Pass
802.11n (HT40)	SISO	2422	/	/	1	36.617	≥ 0.5	Pass
		2437	/	/	1	36.700	≥ 0.5	Pass
		2452	/	/	1	36.698	≥ 0.5	Pass
802.11ax (HEW20)	MIMO	2412	SU	/	1	19.116	≥ 0.5	Pass
		2437	SU	/	1	18.949	≥ 0.5	Pass
		2462	SU	/	1	19.173	≥ 0.5	Pass
802.11ax (HEW40)	MIMO	2422	SU	/	1	38.231	≥ 0.5	Pass
		2437	SU	/	1	37.972	≥ 0.5	Pass
		2452	SU	/	1	38.312	≥ 0.5	Pass
802.11be (EHT20)	MIMO	2412	SU	/	1	19.222	≥ 0.5	Pass
		2437	SU	/	1	19.218	≥ 0.5	Pass
		2462	SU	/	1	19.205	≥ 0.5	Pass
802.11be (EHT40)	MIMO	2422	SU	/	1	38.229	≥ 0.5	Pass
		2437	SU	/	1	38.047	≥ 0.5	Pass
		2452	SU	/	1	38.407	≥ 0.5	Pass

2.2 Test Graph


2.2.1 OBW

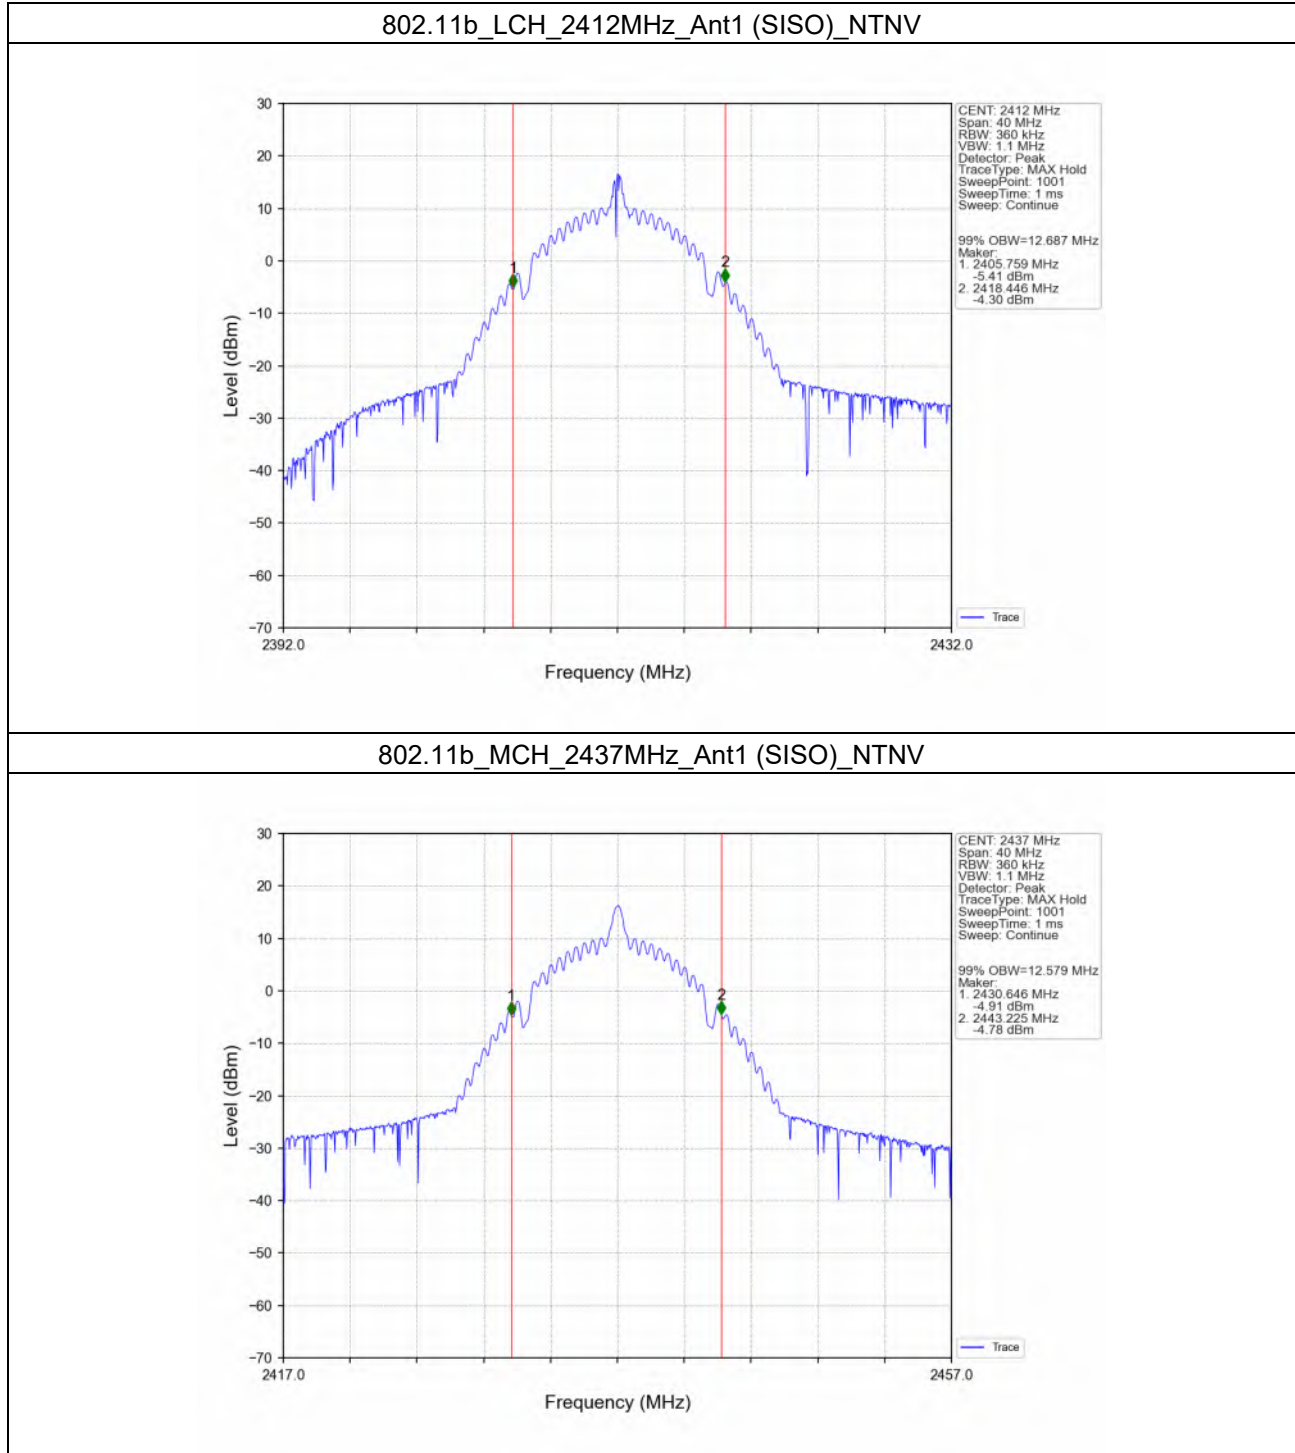


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

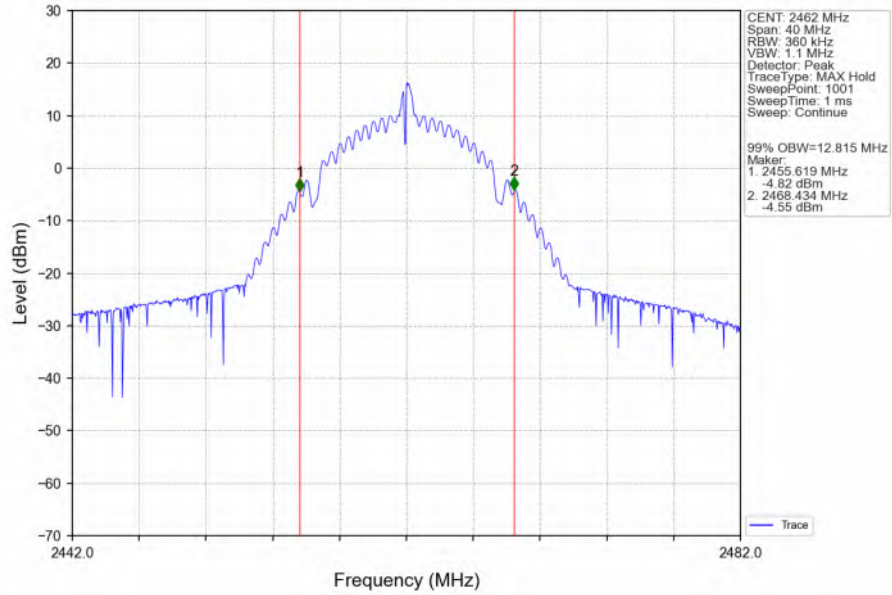


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

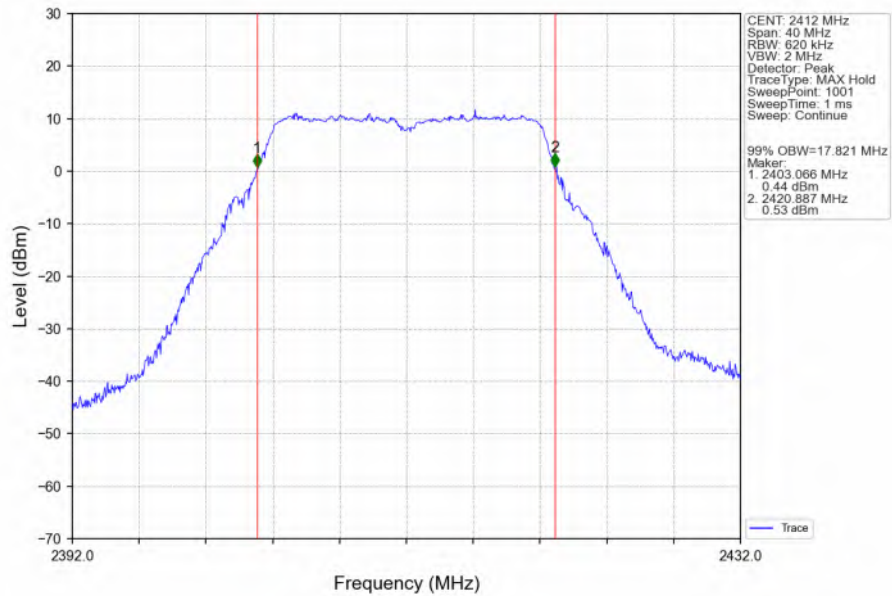


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

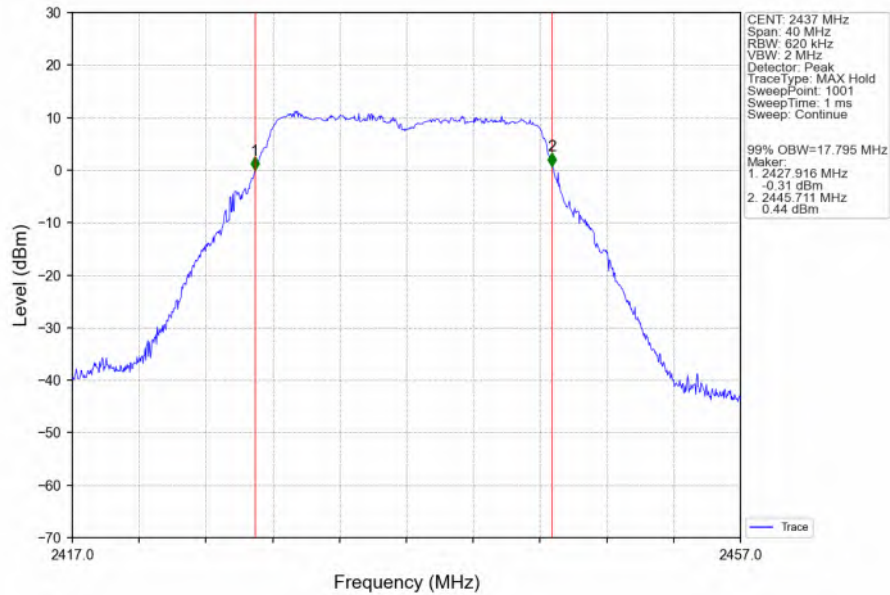


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

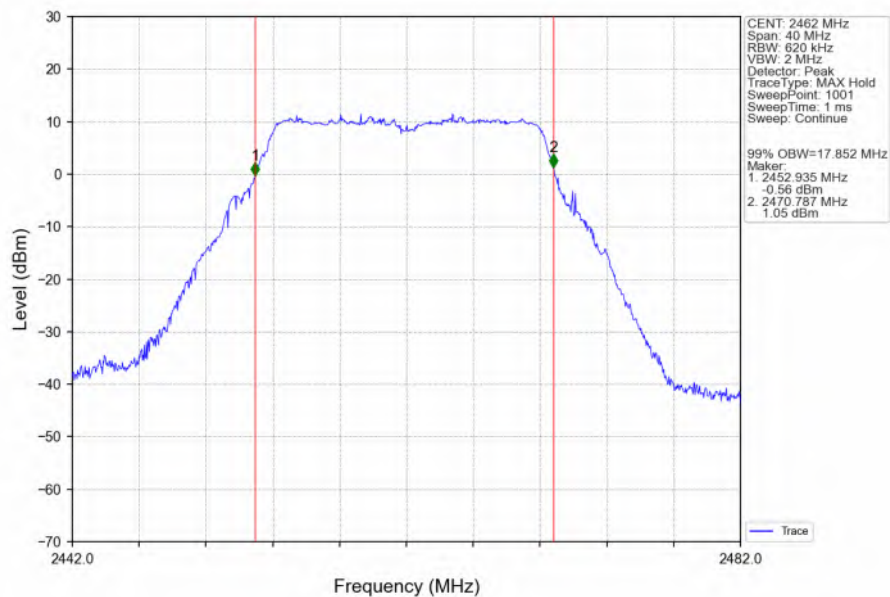


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

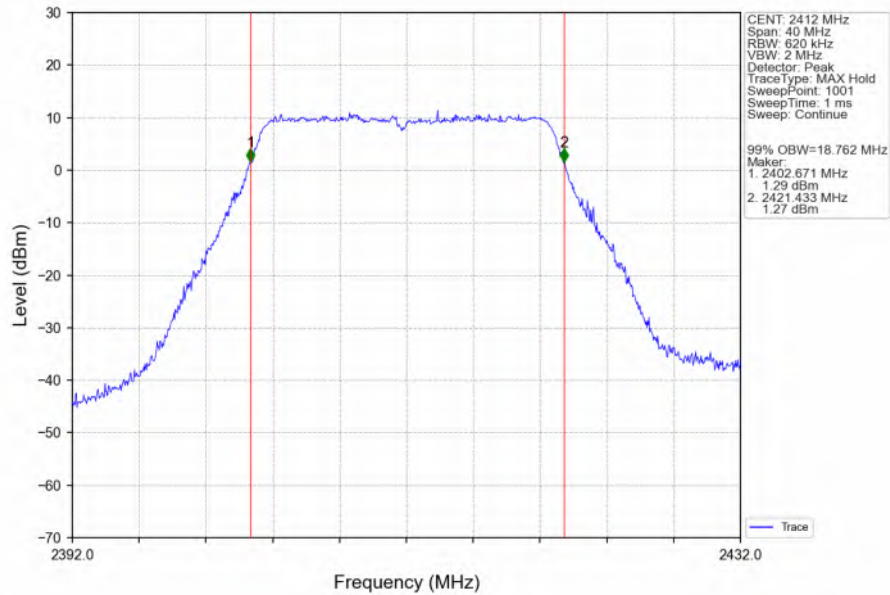


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

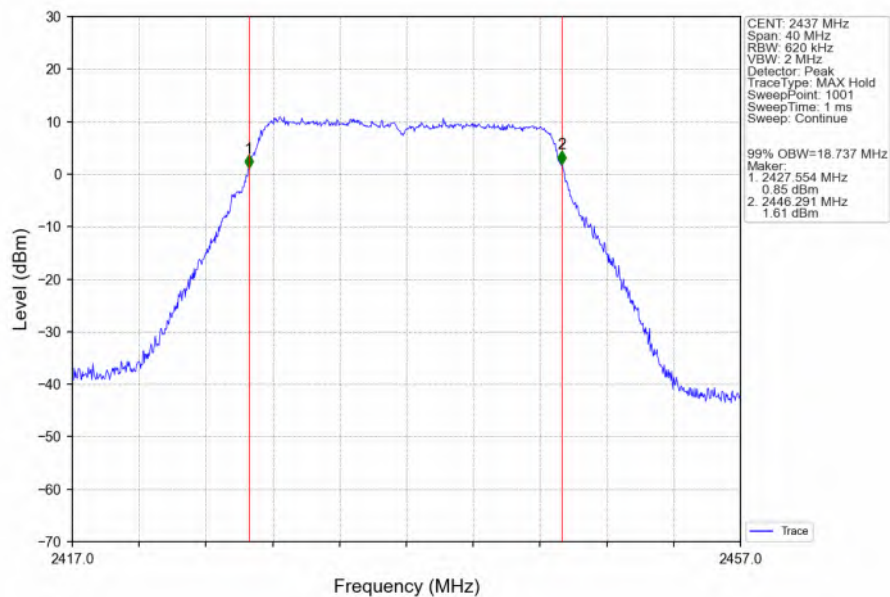


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

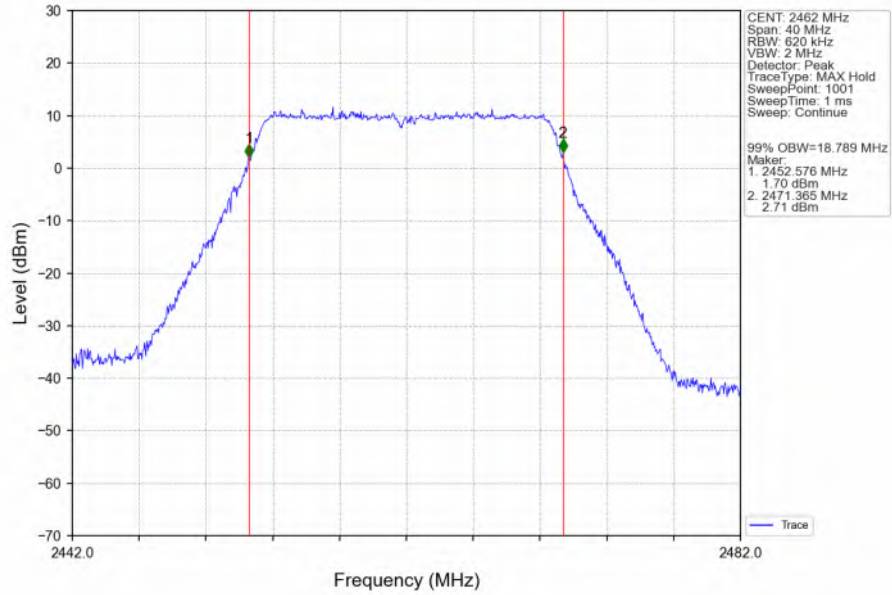


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

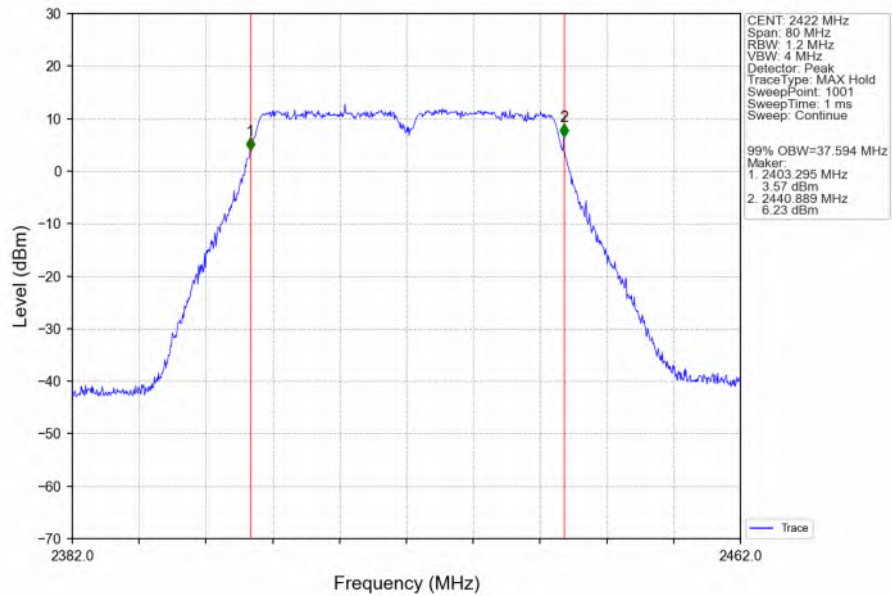


802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

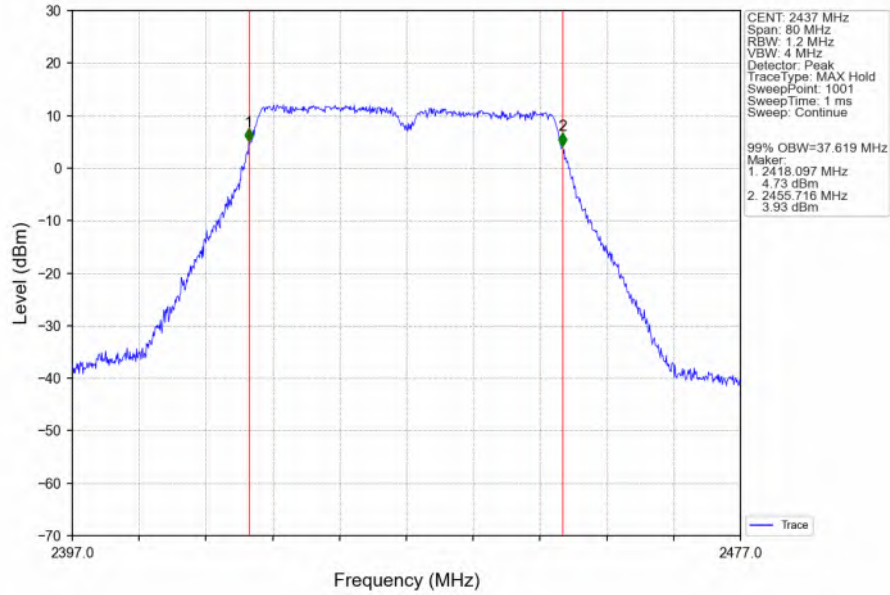


802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

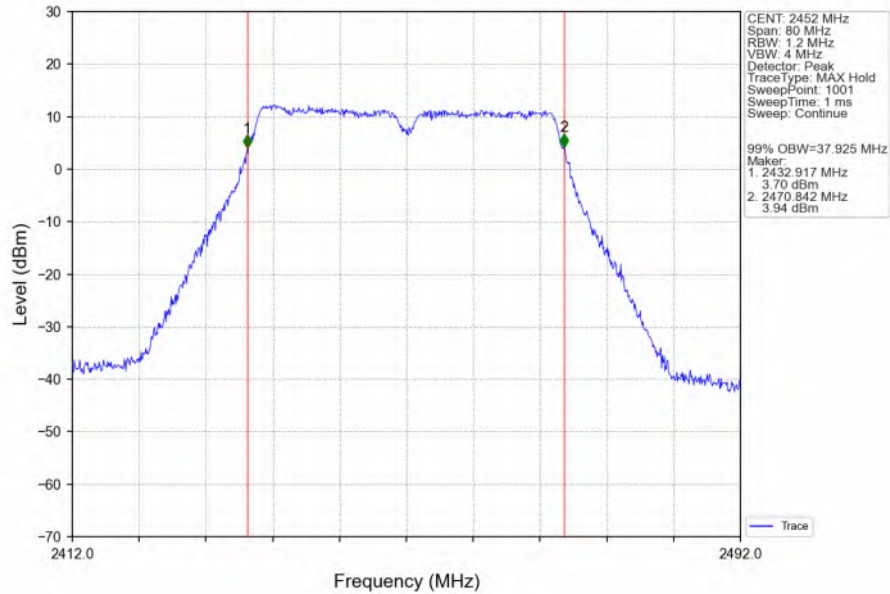


802.11ax(HEW20)_LCH_2412MHz_SU_/_Ant1 (MIMO)_NTNV

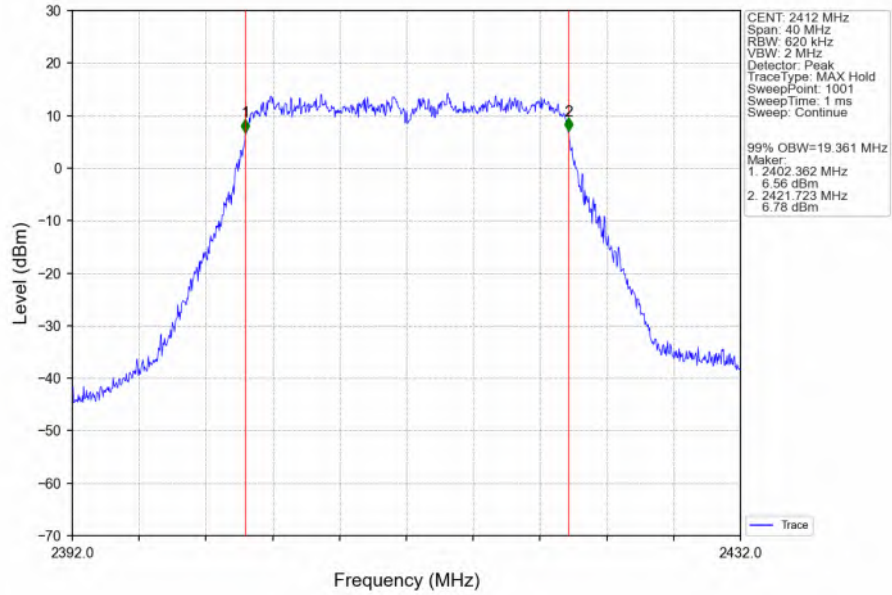


802.11ax(HEW20)_MCH_2437MHz_SU_/_Ant1 (MIMO)_NTNV

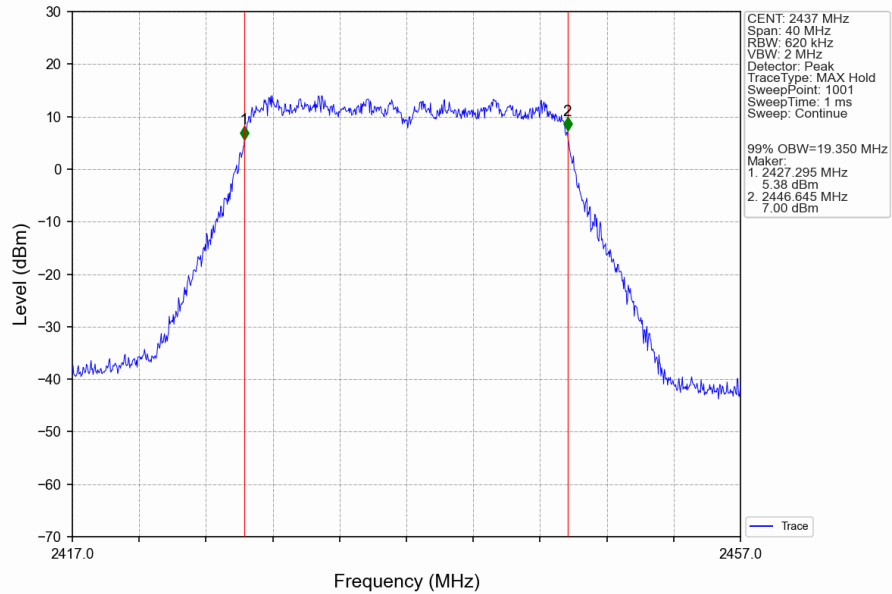


802.11ax(HEW20)_HCH_2462MHz_SU_/_Ant1 (MIMO)_NTNV

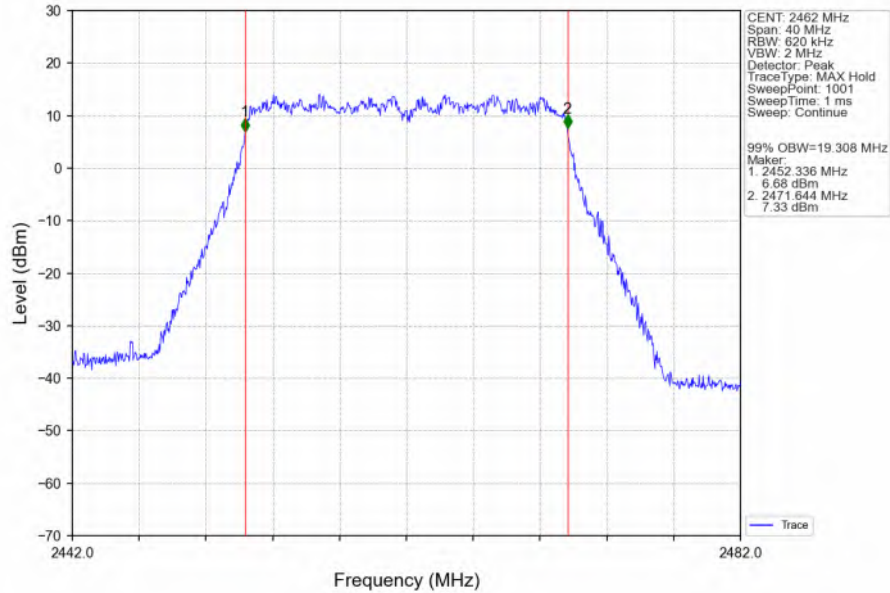


802.11ax(HEW40)_LCH_2422MHz_SU_/_Ant1 (MIMO)_NTNV

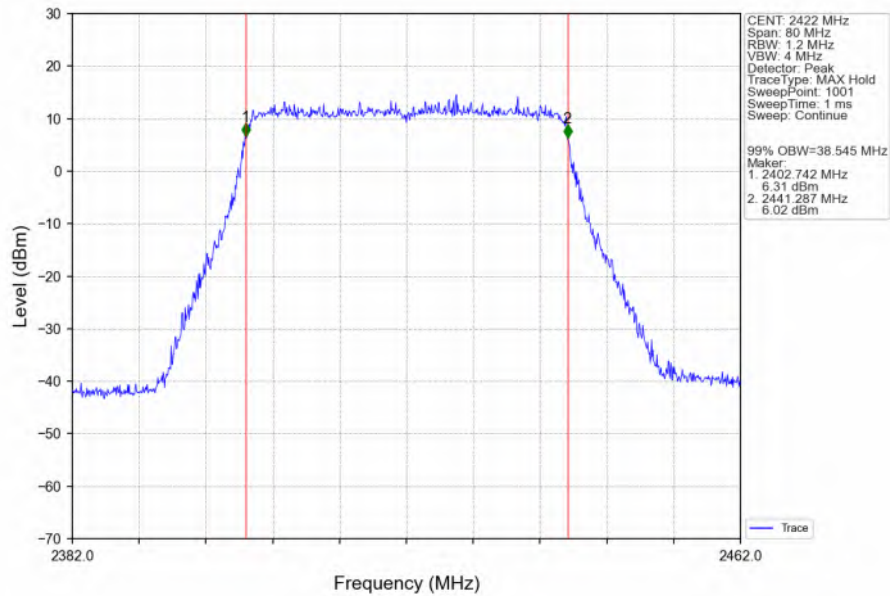


802.11ax(HEW40)_MCH_2437MHz_SU_/_Ant1 (MIMO)_NTNV

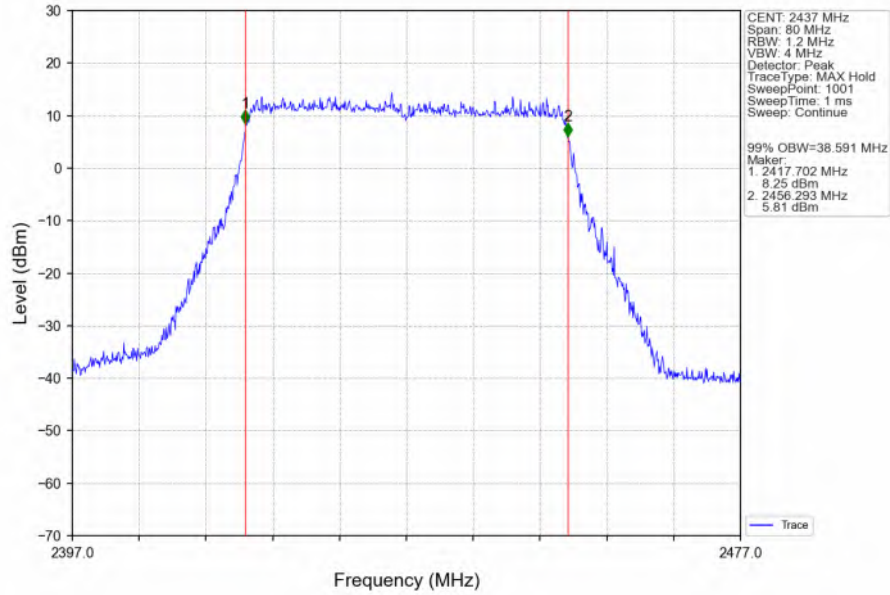


802.11ax(HEW40)_HCH_2452MHz_SU_/_Ant1 (MIMO)_NTNV

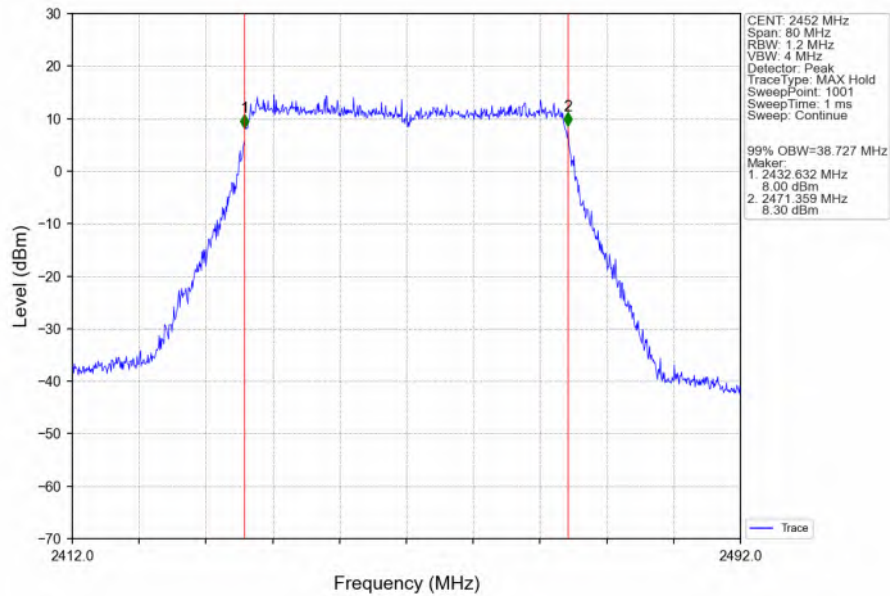


802.11be(EHT20)_LCH_2412MHz_SU_ / _Ant1 (MIMO)_NTNV

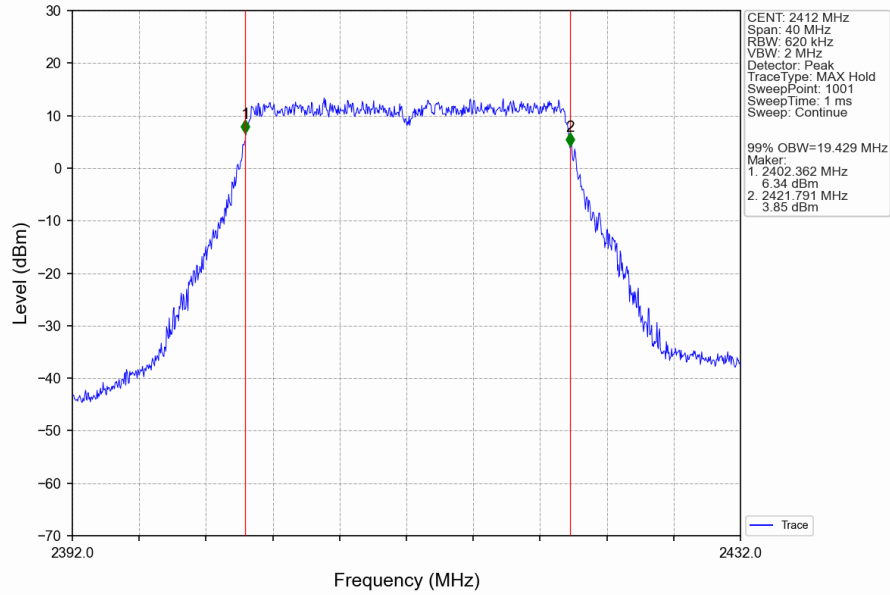


802.11be(EHT20)_MCH_2437MHz_SU_ / _Ant1 (MIMO)_NTNV

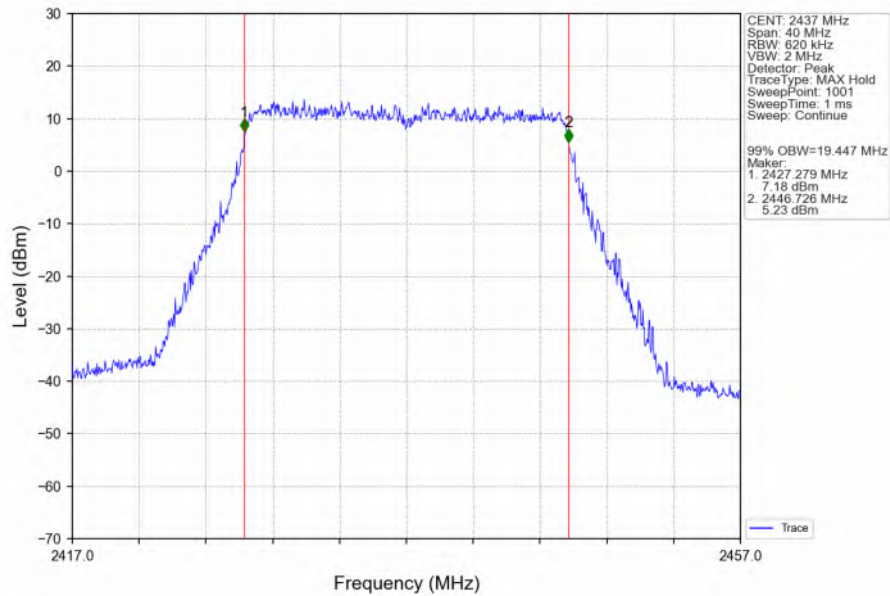


802.11be(EHT20)_HCH_2462MHz_SU_/_Ant1 (MIMO)_NTNV

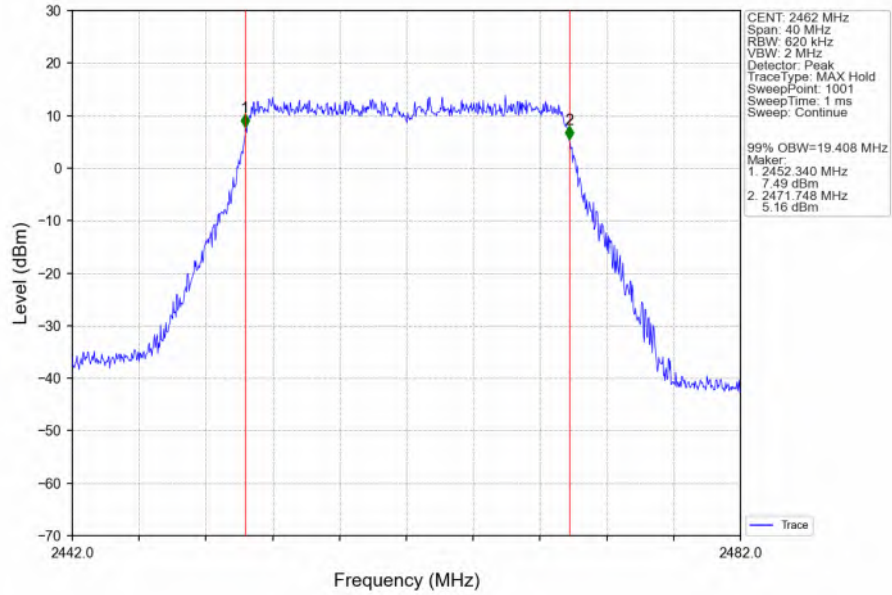


802.11be(EHT40)_LCH_2422MHz_SU_/_Ant1 (MIMO)_NTNV

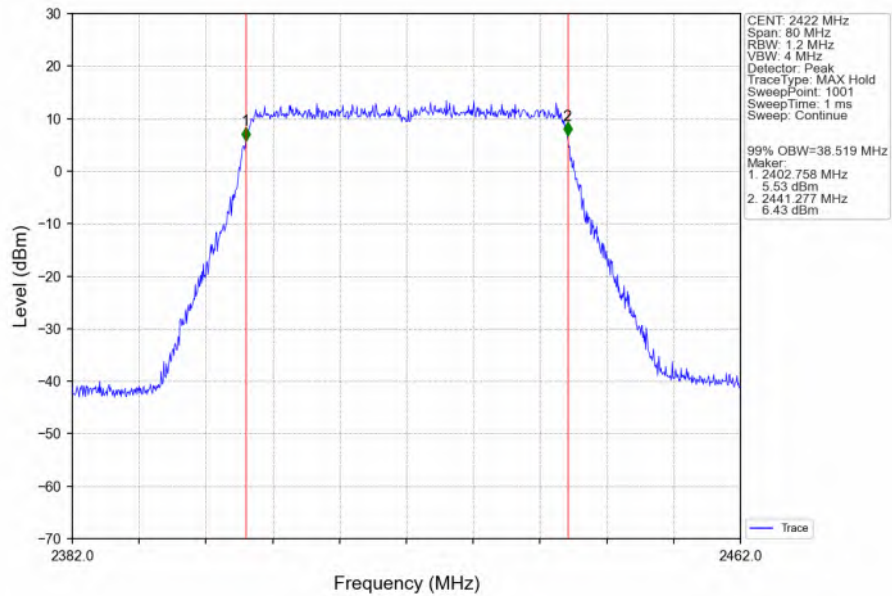


802.11be(EHT40)_MCH_2437MHz_SU_/_Ant1 (MIMO)_NTNV

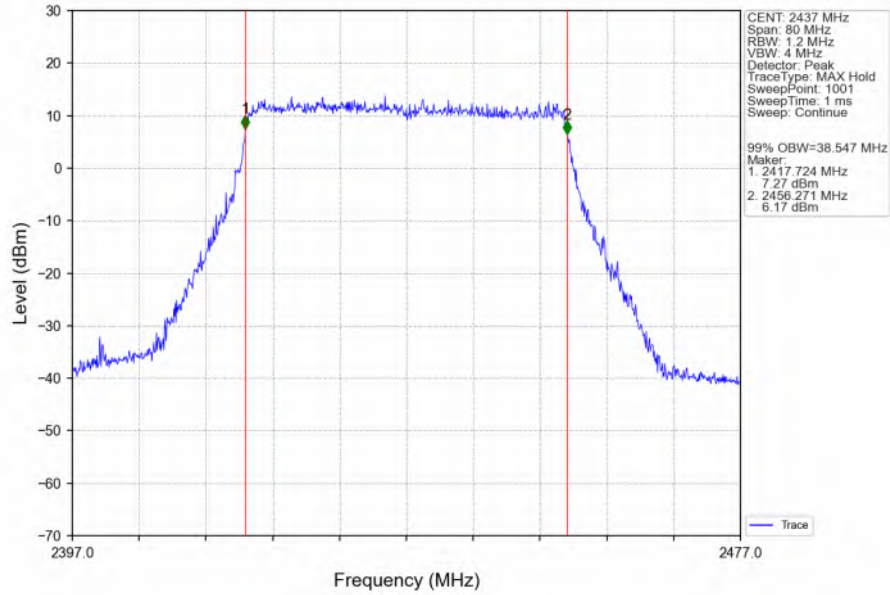


802.11be(EHT40)_HCH_2452MHz_SU_/_Ant1 (MIMO)_NTNV

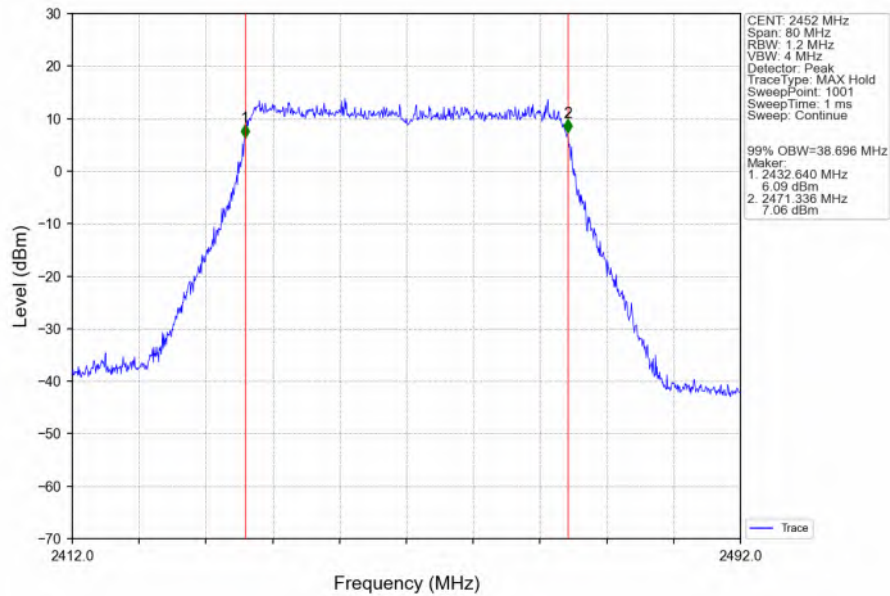


2.2.2 6dB BW

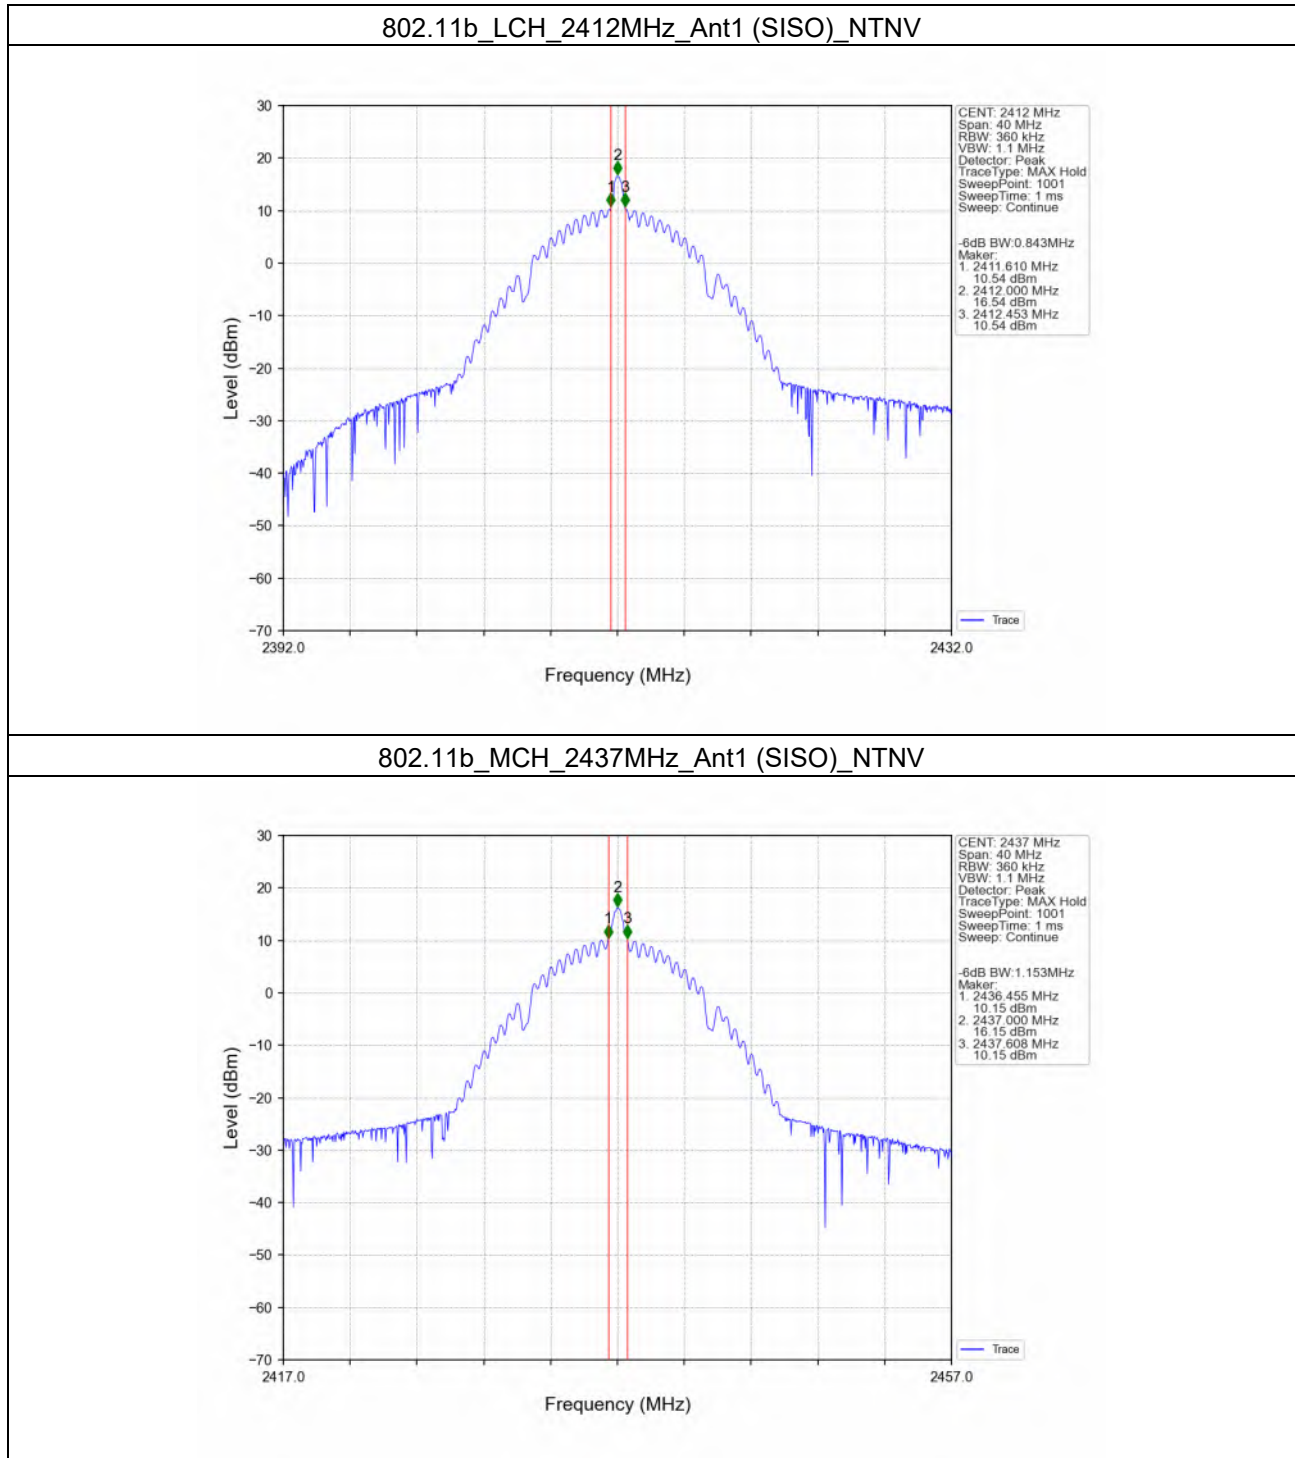


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

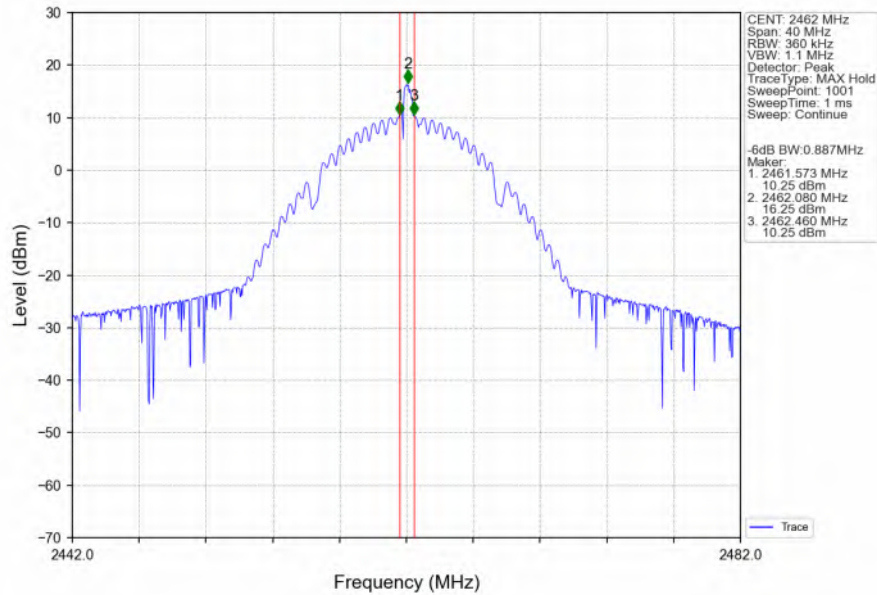


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

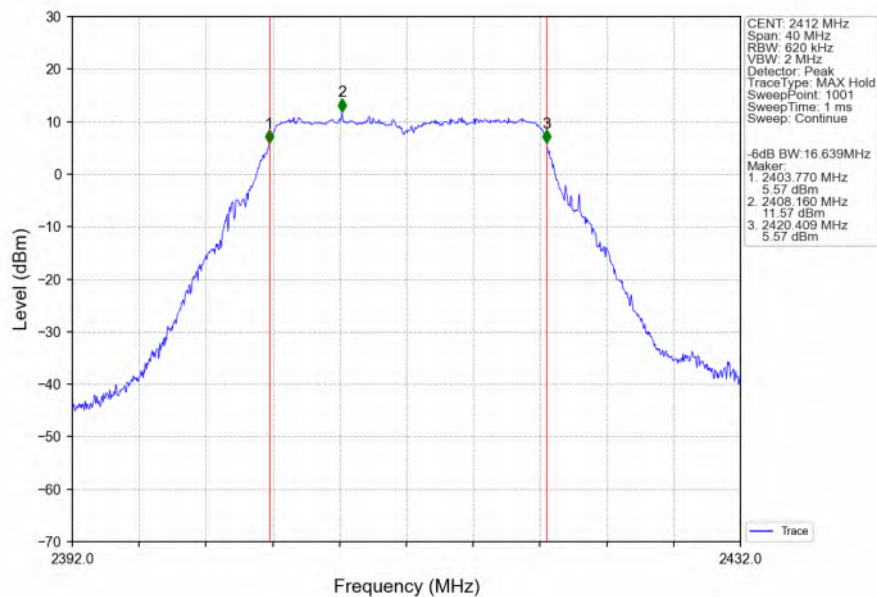


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

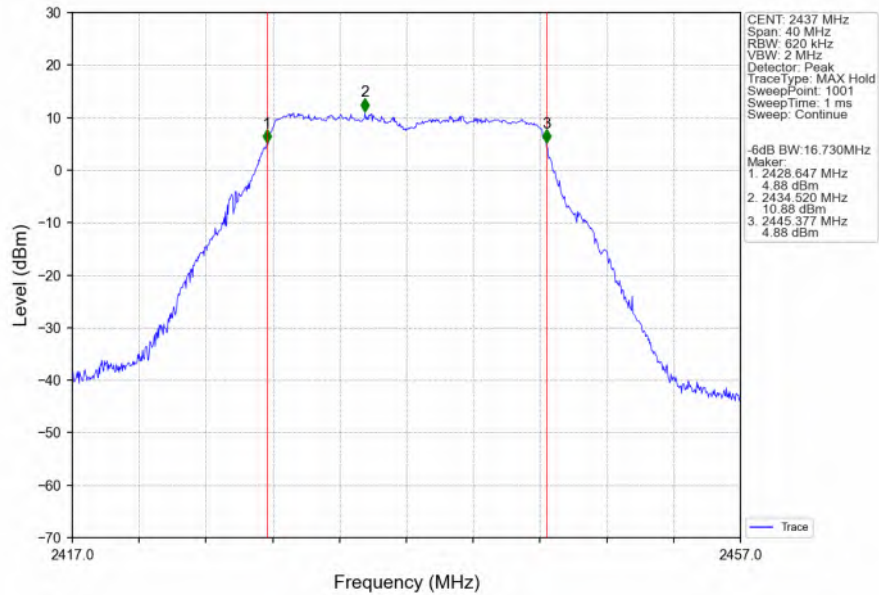


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

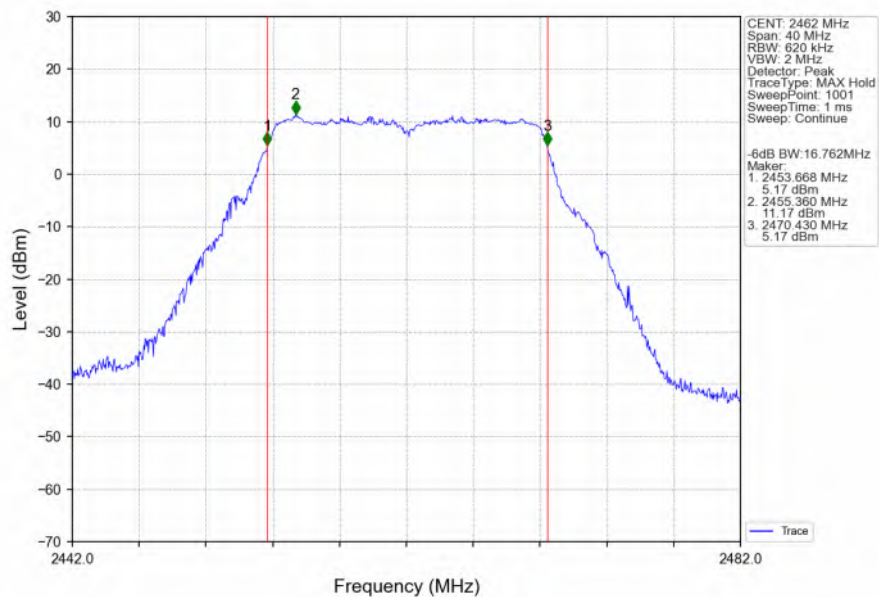


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

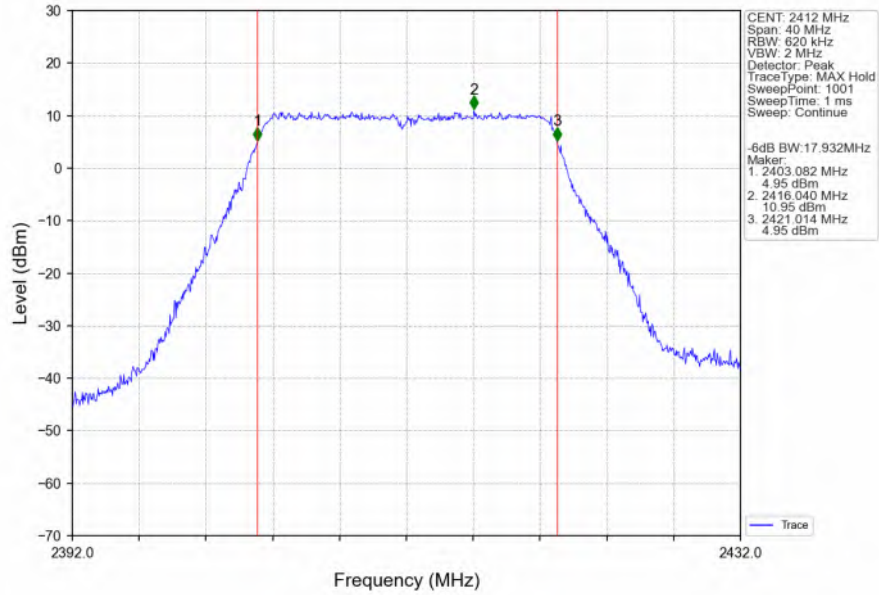


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

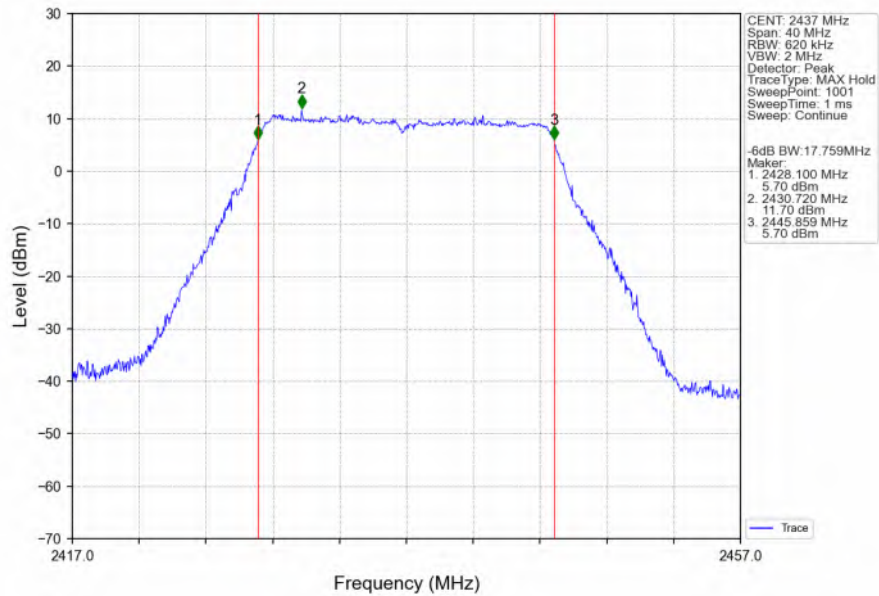


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

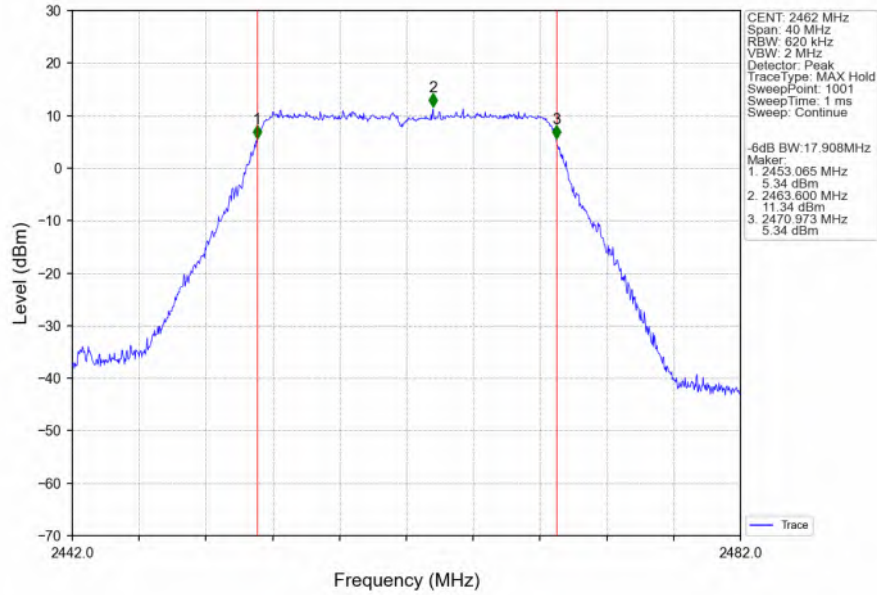


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

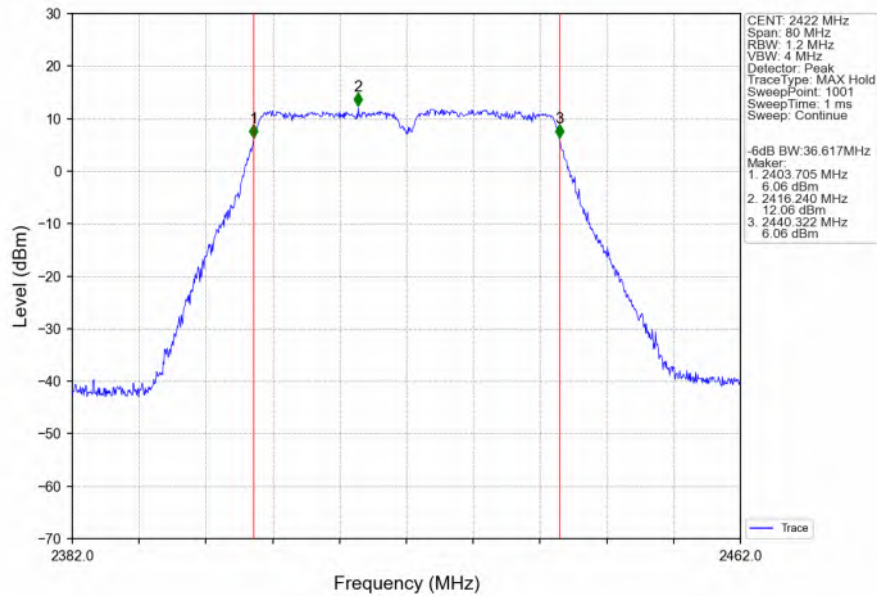


802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

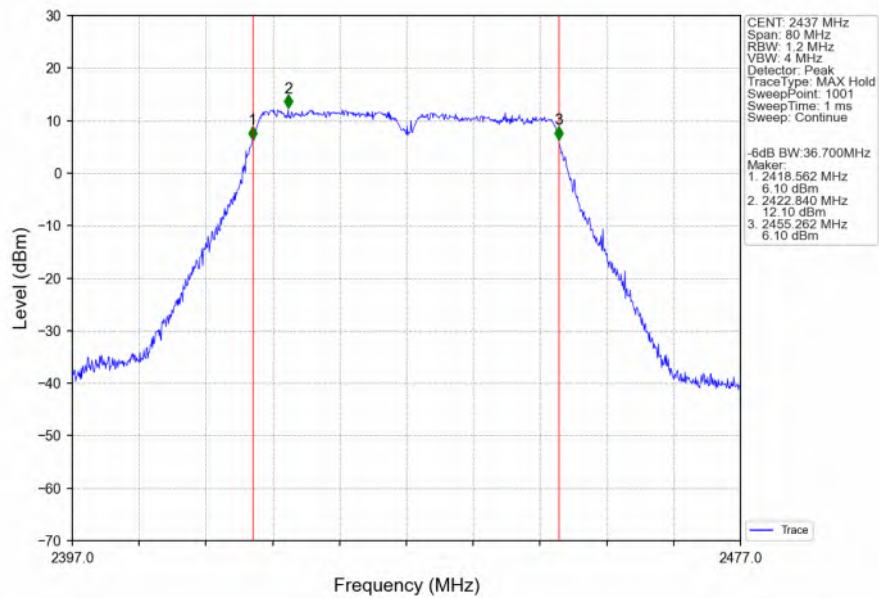


802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

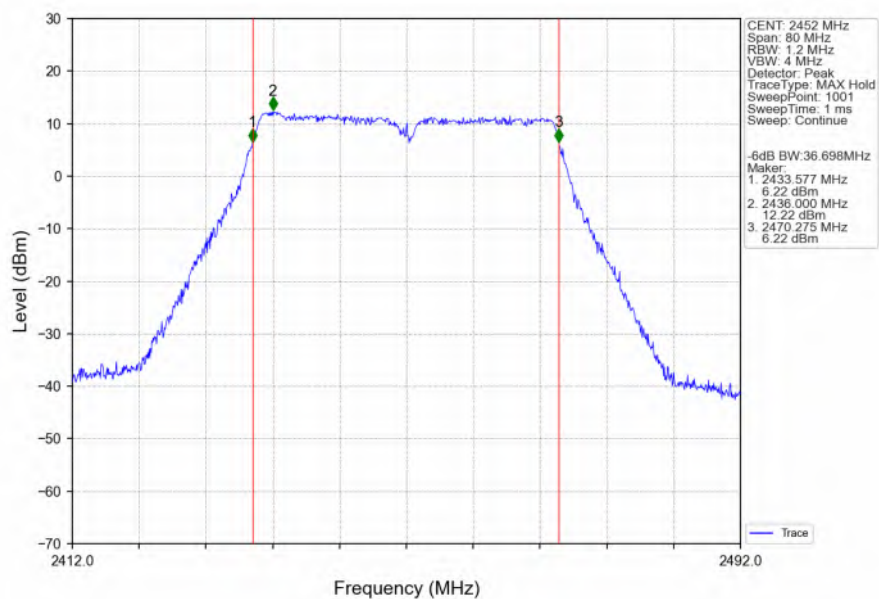


802.11ax(HEW20)_LCH_2412MHz_SU_/_Ant1 (MIMO)_NTNV

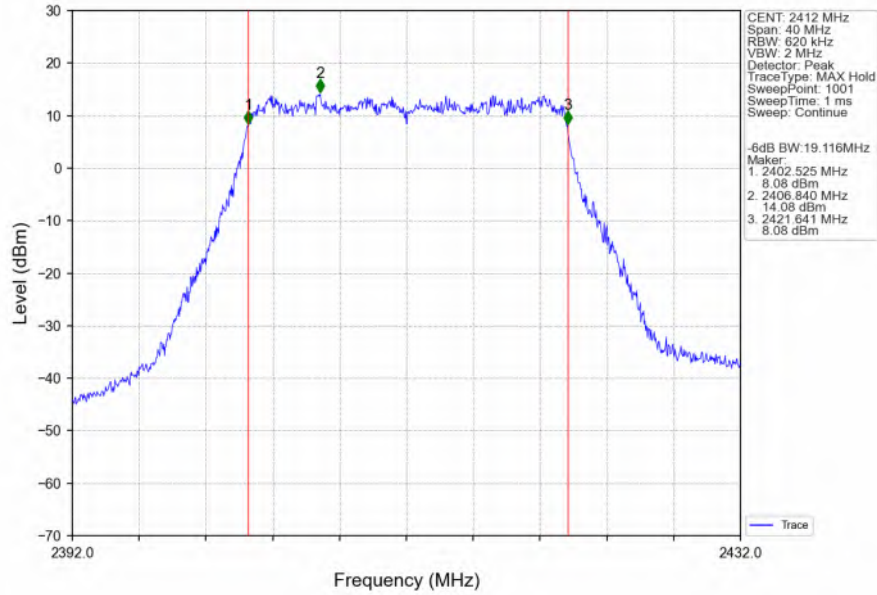


802.11ax(HEW20)_MCH_2437MHz_SU_/_Ant1 (MIMO)_NTNV

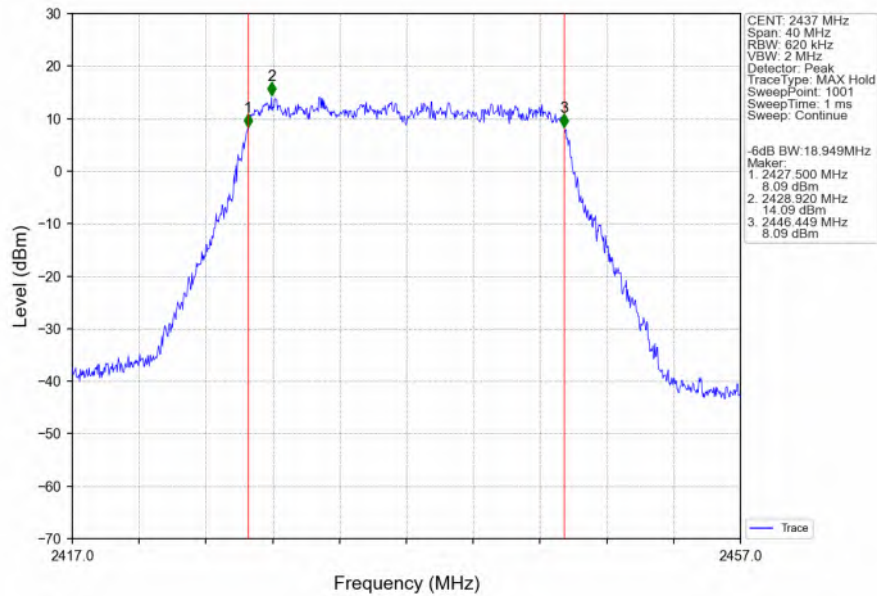


802.11ax(HEW20)_HCH_2462MHz_SU_/_Ant1 (MIMO)_NTNV

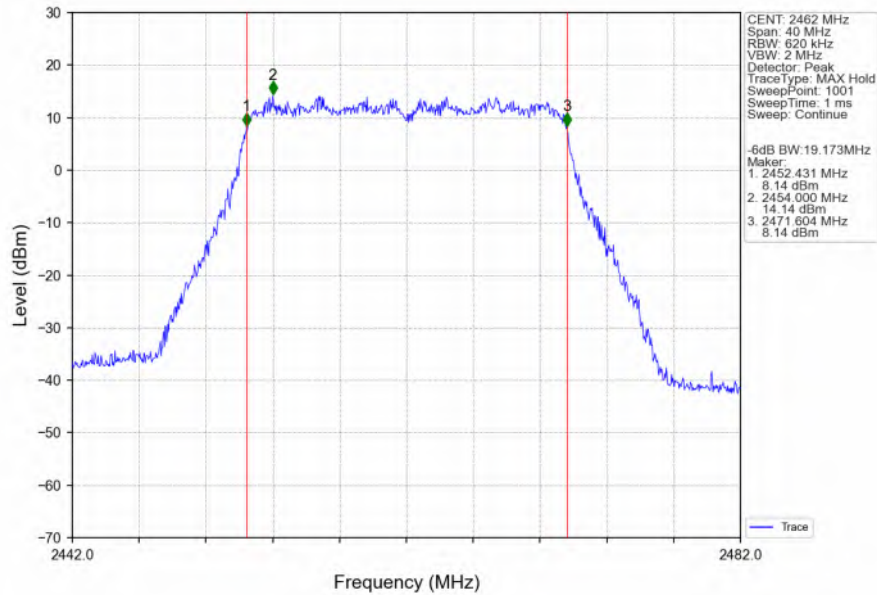


802.11ax(HEW40)_LCH_2422MHz_SU_/_Ant1 (MIMO)_NTNV

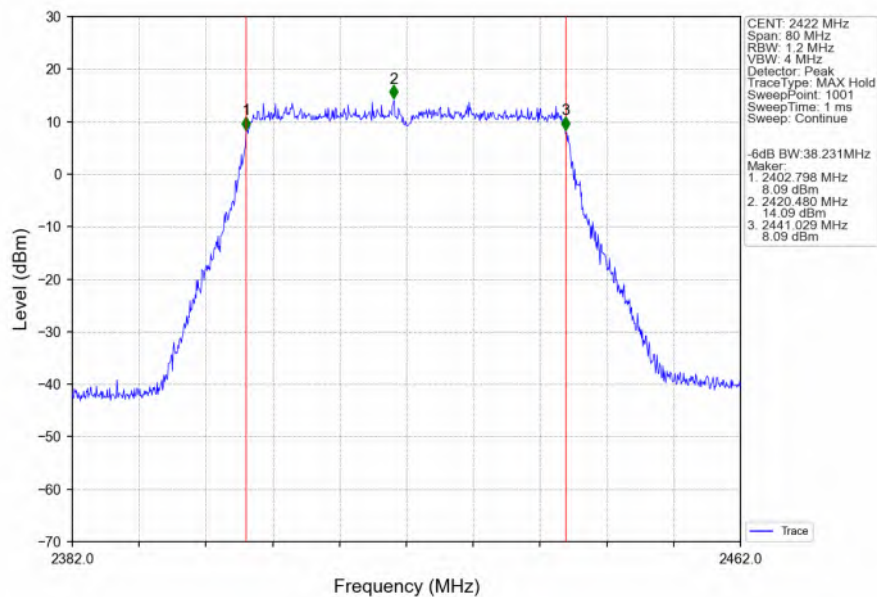


802.11ax(HEW40)_MCH_2437MHz_SU / _Ant1 (MIMO)_NTNV

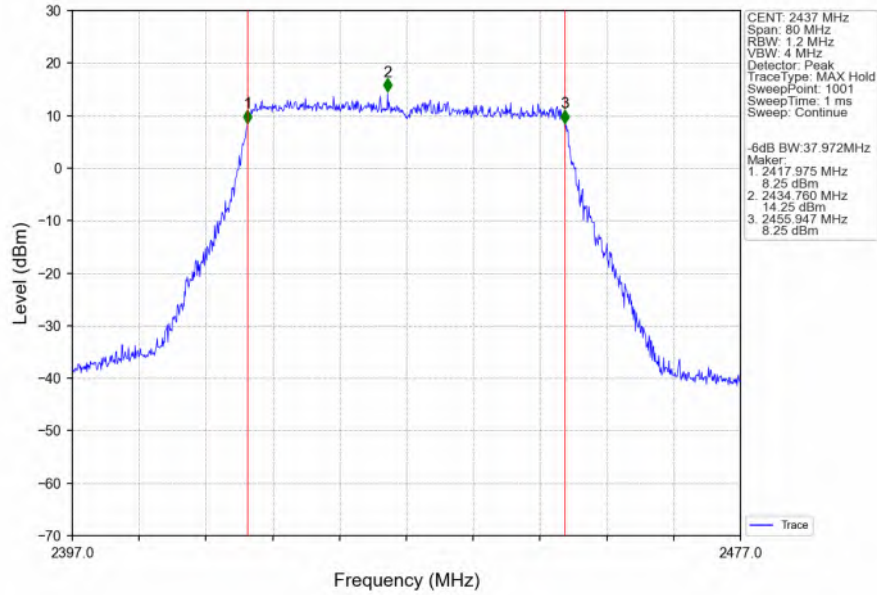


802.11ax(HEW40)_HCH_2452MHz_SU / _Ant1 (MIMO)_NTNV

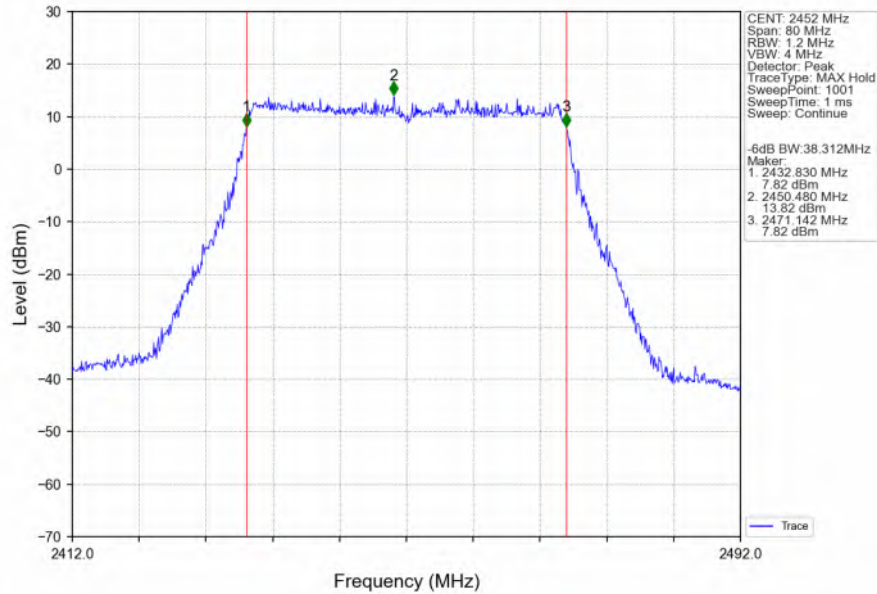


802.11be(EHT20)_LCH_2412MHz_SU_/_Ant1 (MIMO)_NTNV

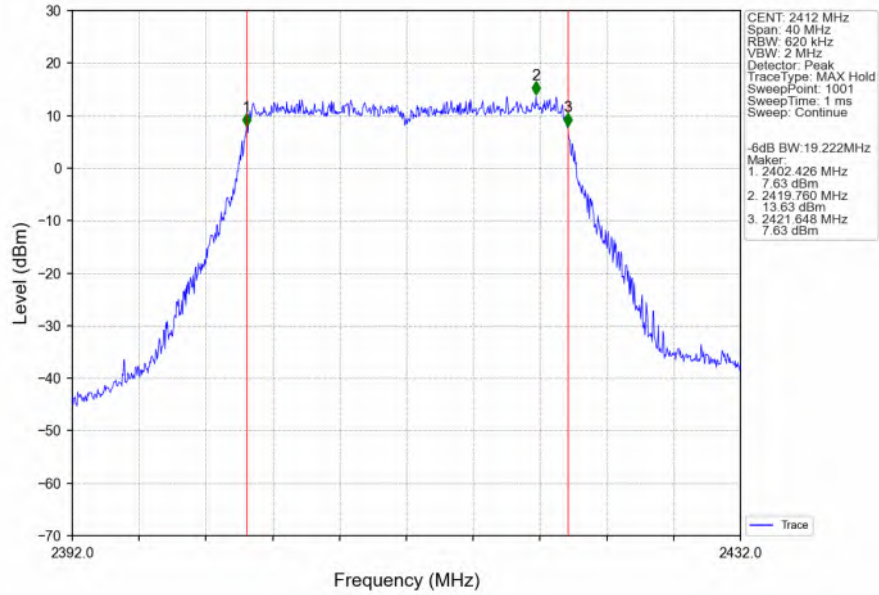


802.11be(EHT20)_MCH_2437MHz_SU_/_Ant1 (MIMO)_NTNV

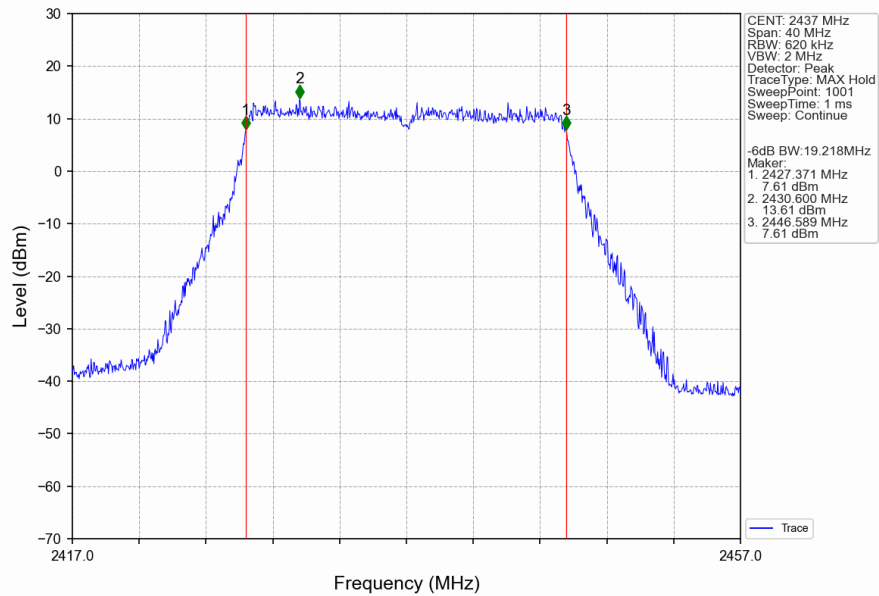


802.11be(EHT20)_HCH_2462MHz_SU_/_Ant1 (MIMO)_NTNV

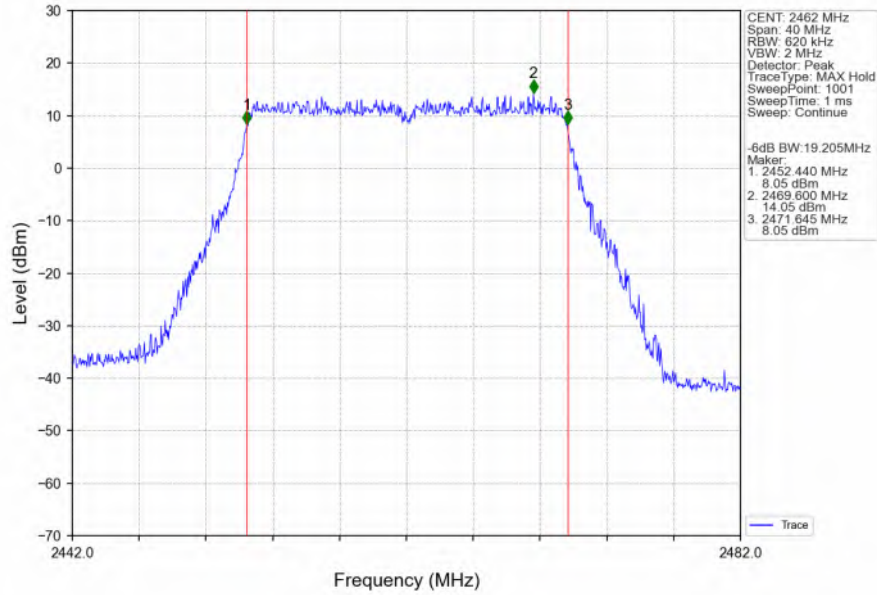


802.11be(EHT40)_LCH_2422MHz_SU_/_Ant1 (MIMO)_NTNV

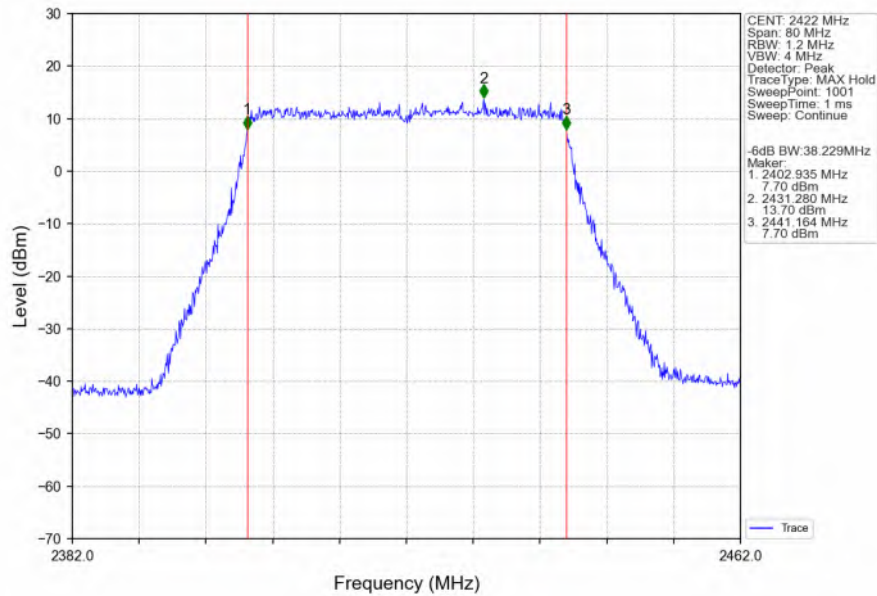

802.11be(EHT40)_MCH_2437MHz_SU_/_Ant1 (MIMO)_NTNV

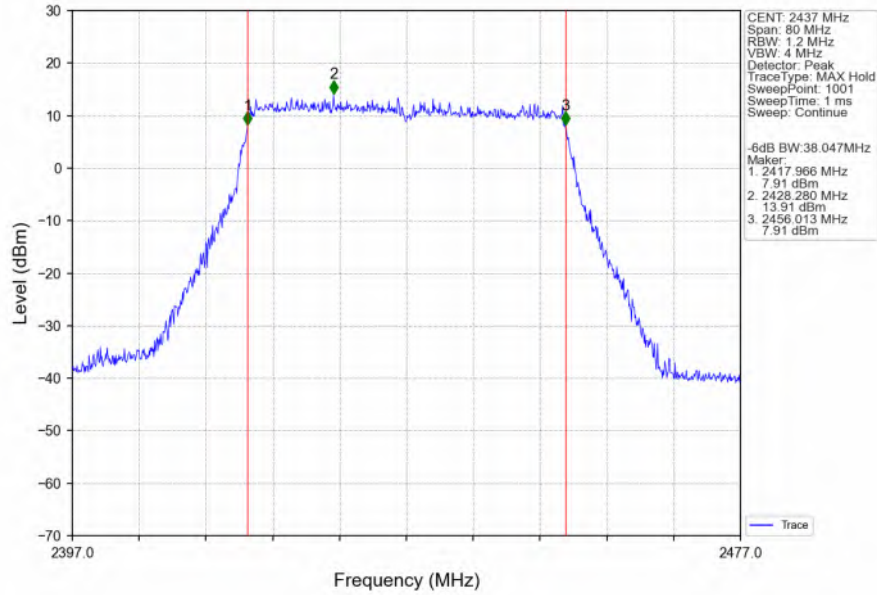

802.11be(EHT40)_HCH_2452MHz_SU_/_Ant1 (MIMO)_NTNV

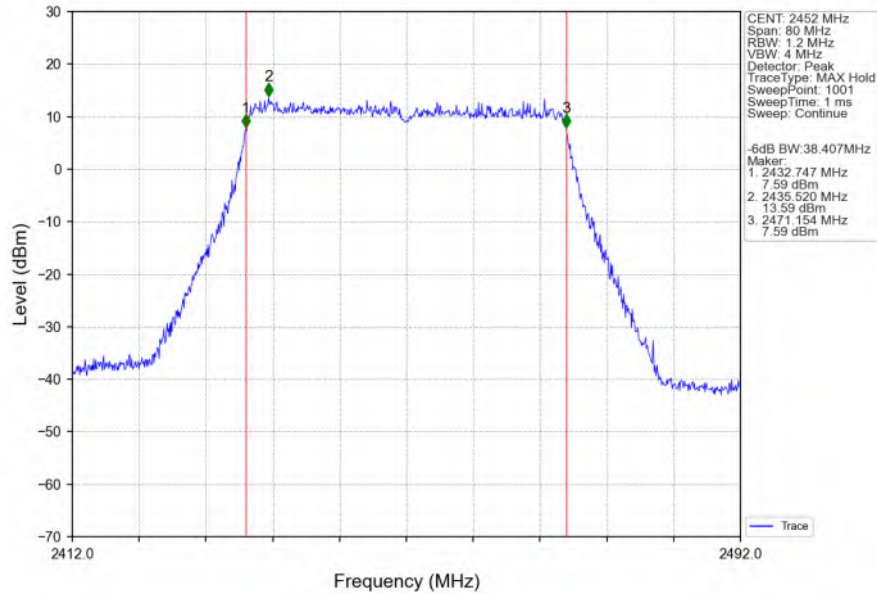



3. Maximum Conducted Output Power

3.1 Test Result

3.1.1 Power

Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Peak Conducted Output Power (dBm)				Verdict
					ANT1	ANT2	MIMO	Limit	
802.11b	SISO	2412	/	/	20.58	20.49	/	<=30	Pass
		2437	/	/	20.38	20.35	/	<=30	Pass
		2462	/	/	20.79	20.74	/	<=30	Pass
802.11g	SISO	2412	/	/	24.67	24.68	/	<=30	Pass
		2437	/	/	24.37	24.34	/	<=30	Pass
		2462	/	/	24.73	24.70	/	<=30	Pass
802.11n (HT20)	SISO	2412	/	/	24.80	24.80	/	<=30	Pass
		2437	/	/	24.48	24.47	/	<=30	Pass
		2462	/	/	24.96	24.96	/	<=30	Pass
802.11n (HT40)	SISO	2422	/	/	24.77	24.75	/	<=30	Pass
		2437	/	/	24.79	24.73	/	<=30	Pass
		2452	/	/	24.72	24.76	/	<=30	Pass
802.11ax (HEW20)	MIMO	2412	SU	/	26.64	26.67	29.67	<=30	Pass
		2437	SU	/	26.30	26.24	29.28	<=30	Pass
		2462	SU	/	26.77	26.87	29.83	<=30	Pass
802.11ax (HEW40)	MIMO	2422	SU	/	25.85	25.88	28.88	<=30	Pass
		2437	SU	/	25.85	25.90	28.89	<=30	Pass
		2452	SU	/	25.87	25.89	28.89	<=30	Pass
802.11be (EHT20)	MIMO	2412	RU26+52	/	21.72	21.85	24.80	<=30	Pass
			SU	/	25.99	26.06	29.04	<=30	Pass
			RU26+106	/	23.81	23.69	26.76	<=30	Pass
		2437	SU	/	25.79	25.72	28.77	<=30	Pass
			RU26+52	/	22.08	22.10	25.10	<=30	Pass
			RU26+106	/	23.86	23.85	26.87	<=30	Pass
		2462	SU	/	26.15	26.16	29.17	<=30	Pass
			RU26+52	/	23.67	23.70	26.70	<=30	Pass
			RU26+106	/	25.12	25.12	28.13	<=30	Pass
802.11be (EHT40)	MIMO	2422	SU	/	25.73	25.74	28.75	<=30	Pass
		2437	SU	/	25.65	25.65	28.66	<=30	Pass
		2452	SU	/	25.67	25.59	28.64	<=30	Pass



4. Maximum Power Spectral Density


4.1 Test Result

4.1.1 PSD


Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum PSD (dBm)				Verdict
					ANT1	ANT2	MIMO	Limit	
802.11b	SISO	2412	/	/	-3.74	-3.40	/	<=8	Pass
		2437	/	/	-3.66	-4.62	/	<=8	Pass
		2462	/	/	-3.30	-2.81	/	<=8	Pass
802.11g	SISO	2412	/	/	-8.83	-9.31	/	<=8	Pass
		2437	/	/	-9.83	-9.59	/	<=8	Pass
		2462	/	/	-9.54	-9.74	/	<=8	Pass
802.11n (HT20)	SISO	2412	/	/	-9.15	-9.51	/	<=8	Pass
		2437	/	/	-9.81	-8.77	/	<=8	Pass
		2462	/	/	-9.77	-9.63	/	<=8	Pass
802.11n (HT40)	SISO	2422	/	/	-12.47	-12.99	/	<=8	Pass
		2437	/	/	-12.14	-12.48	/	<=8	Pass
		2452	/	/	-12.12	-12.21	/	<=8	Pass
802.11ax (HEW20)	MIMO	2412	SU	/	-8.83	-9.42	-7.19	<=8	Pass
		2437	SU	/	-10.43	-8.80	-7.84	<=8	Pass
		2462	SU	/	-9.34	-9.49	-7.98	<=8	Pass
802.11ax (HEW40)	MIMO	2422	SU	/	-11.54	-10.23	-8.90	<=8	Pass
		2437	SU	/	-11.11	-11.47	-8.58	<=8	Pass
		2452	SU	/	-10.93	-11.54	-9.30	<=8	Pass
802.11be (EHT20)	MIMO	2412	RU26+52	/	-9.48	-10.25	-7.93	<=8	Pass
			SU	/	-9.37	-9.90	-7.26	<=8	Pass
			RU26+106	/	-9.92	-9.46	-8.05	<=8	Pass
		2437	SU	/	-8.73	-8.75	-7.25	<=8	Pass
			RU26+52	/	-9.71	-8.58	-7.26	<=8	Pass
			RU26+106	/	-9.50	-9.18	-7.91	<=8	Pass
		2462	SU	/	-8.54	-7.72	-5.93	<=8	Pass
			RU26+52	/	-8.96	-8.35	-6.59	<=8	Pass
			RU26+106	/	-7.94	-8.42	-6.03	<=8	Pass
802.11be (EHT40)	MIMO	2422	SU	/	-12.04	-11.91	-10.65	<=8	Pass
		2437	SU	/	-12.68	-12.15	-10.63	<=8	Pass
		2452	SU	/	-10.49	-9.81	-9.43	<=8	Pass

4.2 Test Graph


4.2.1 PSD

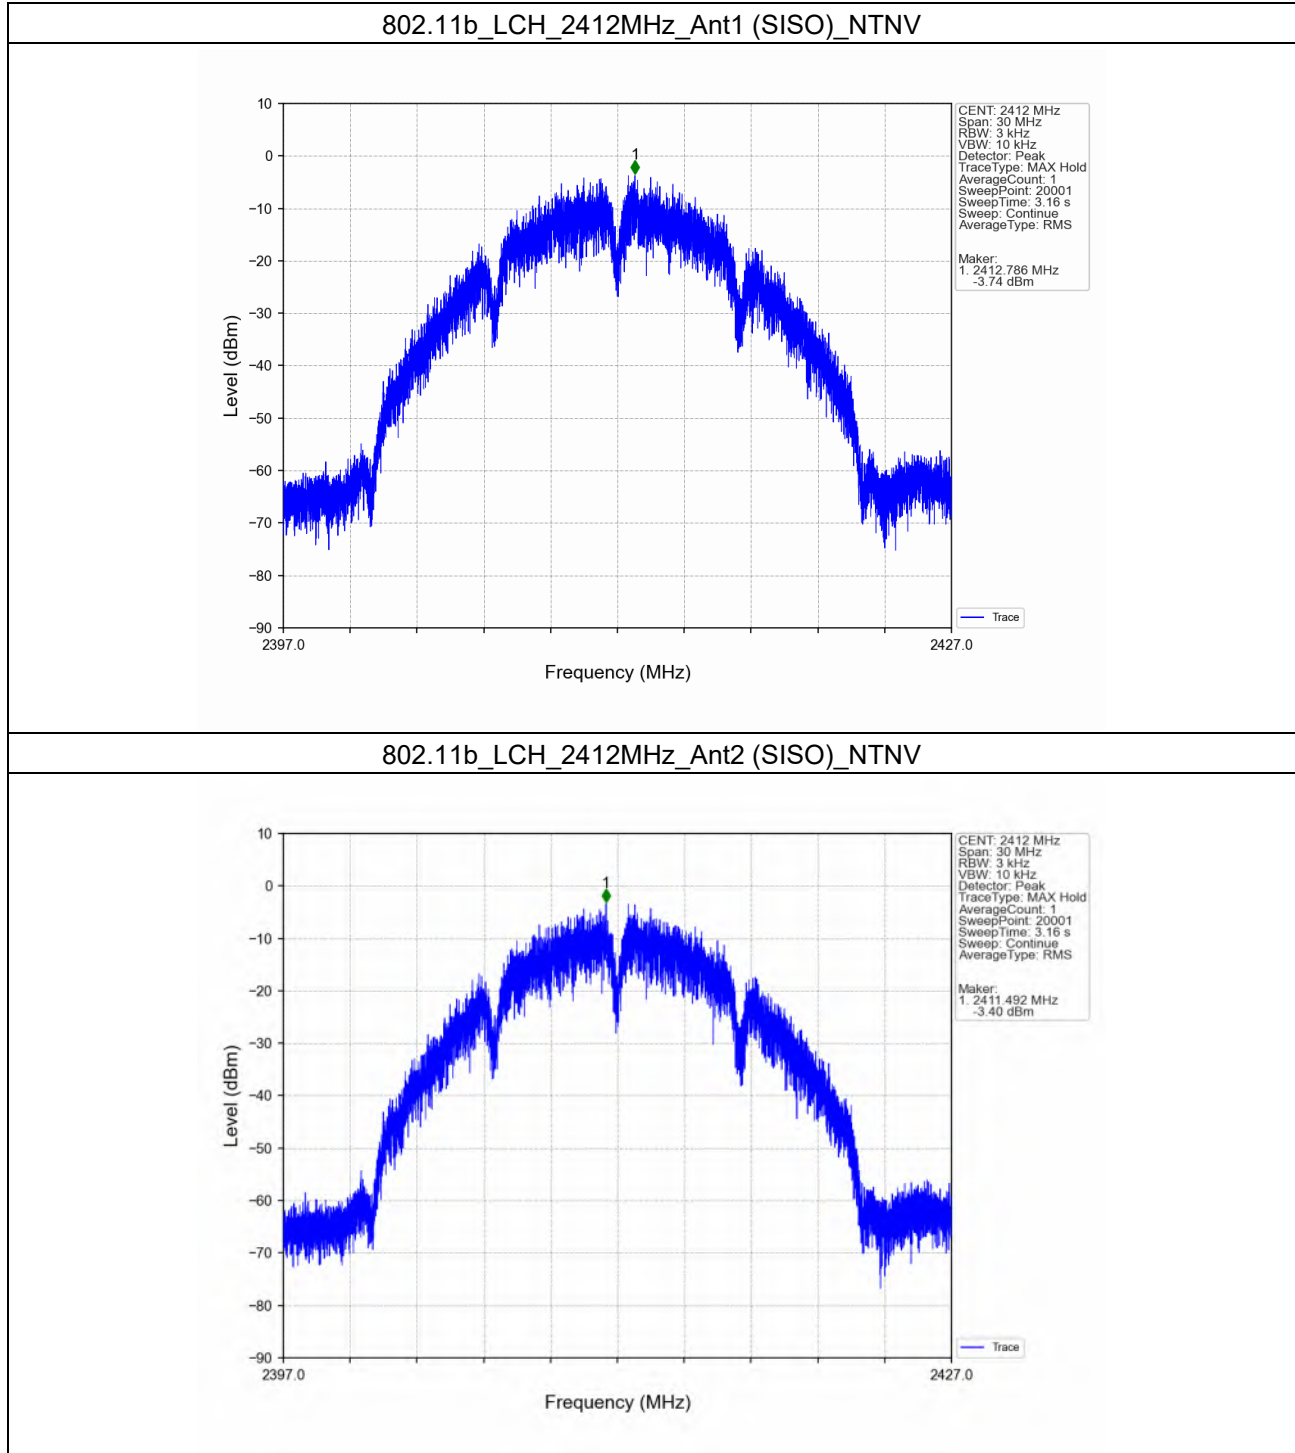


802.11b_MCH_2437MHz_Ant1 (SISO)_NTNV

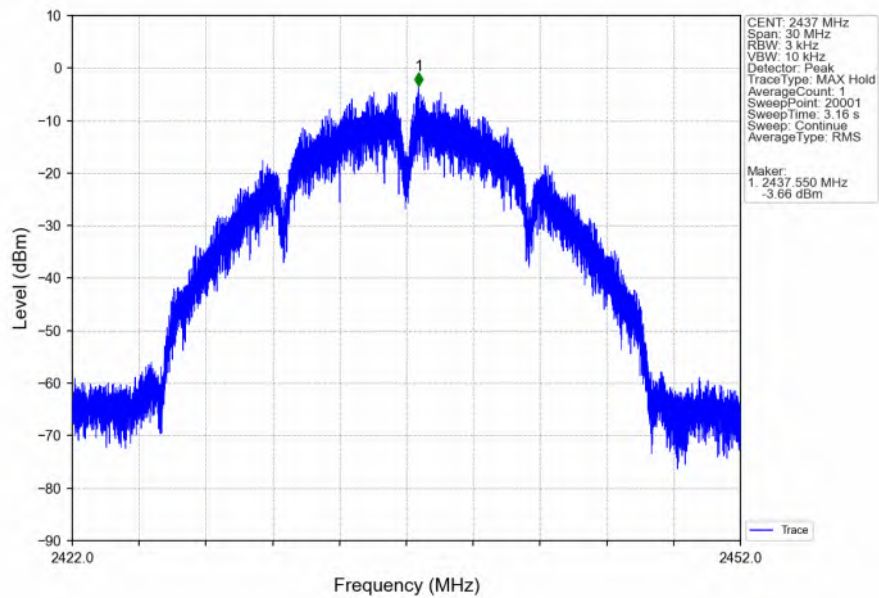


802.11b_MCH_2437MHz_Ant2 (SISO)_NTNV

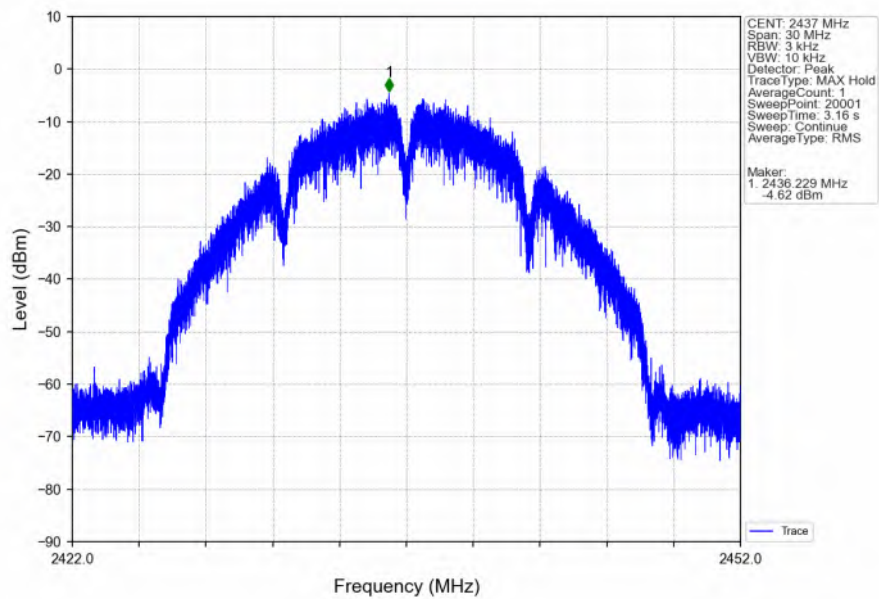


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

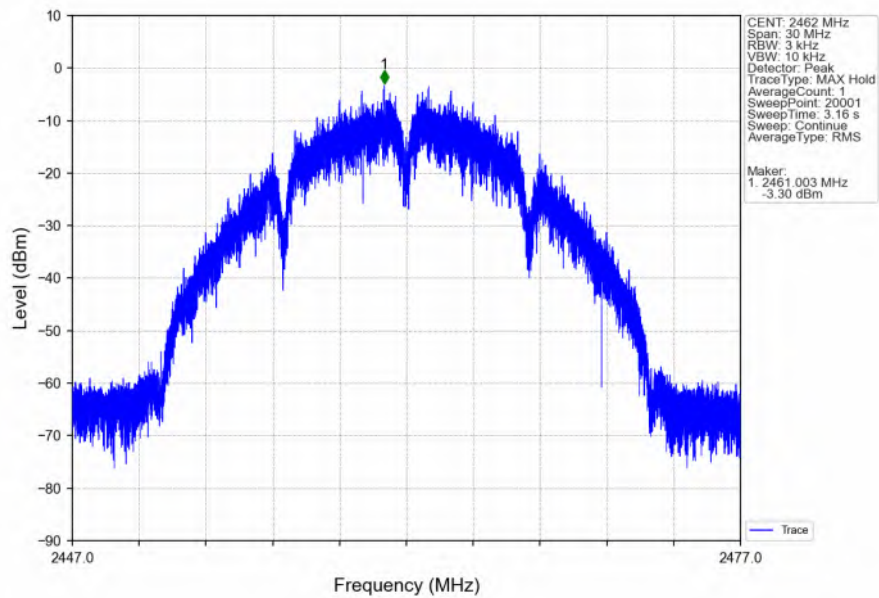


802.11b_HCH_2462MHz_Ant2 (SISO)_NTNV

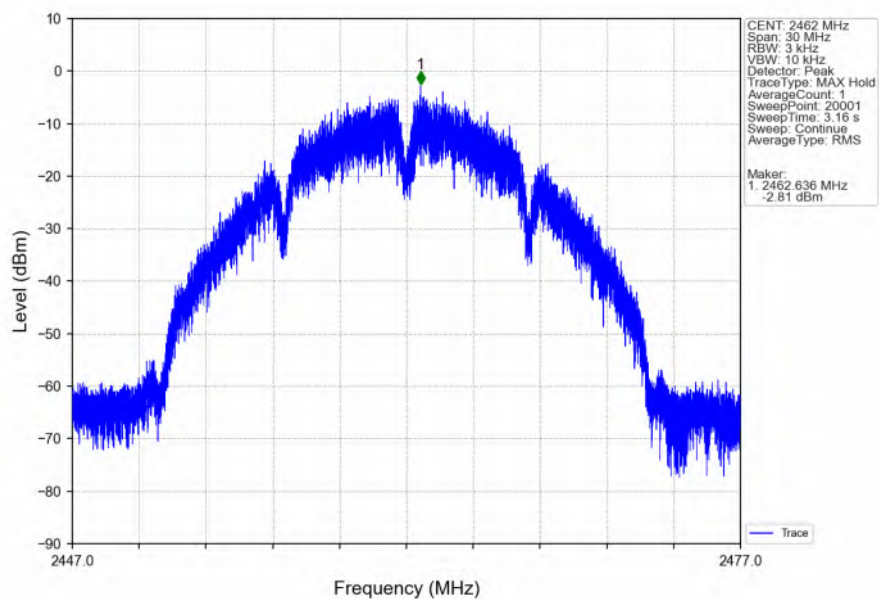


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

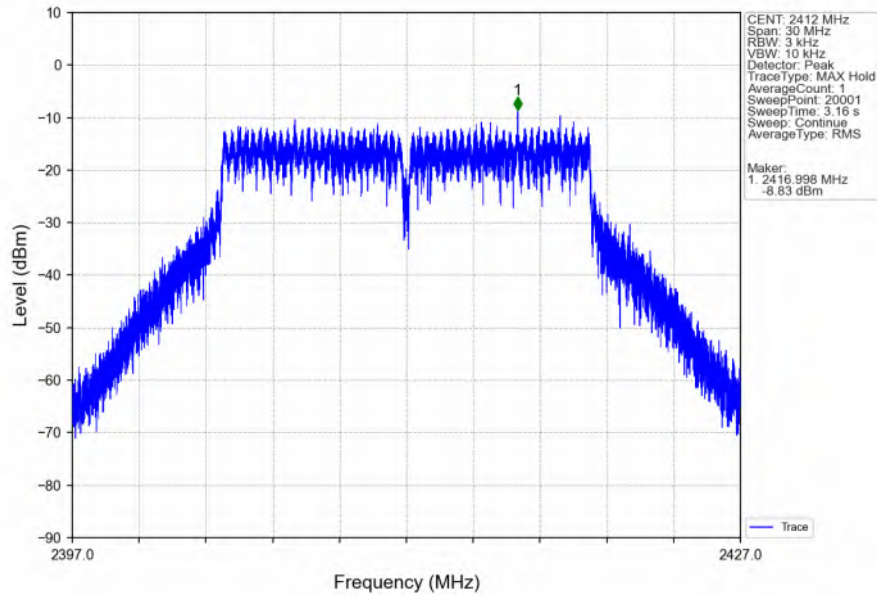


802.11g_LCH_2412MHz_Ant2 (SISO)_NTNV

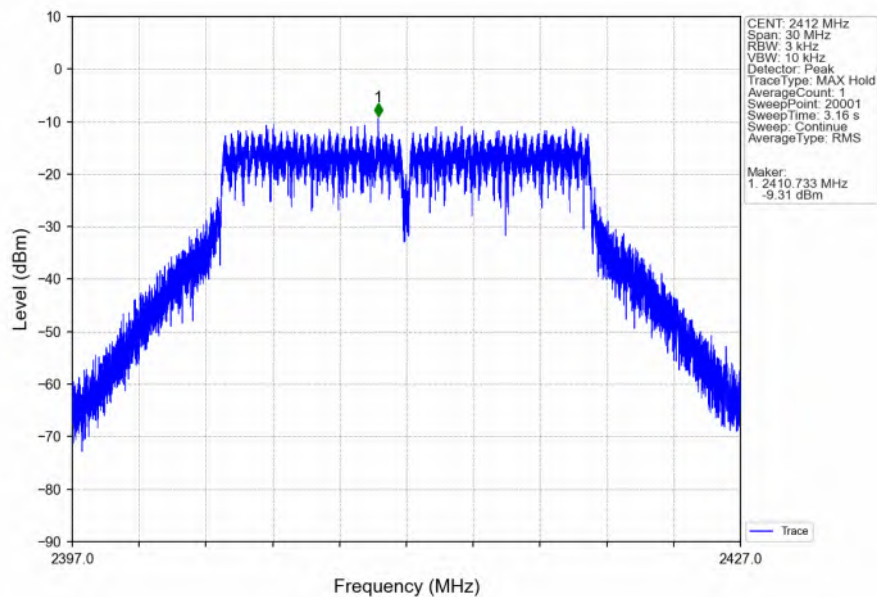


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

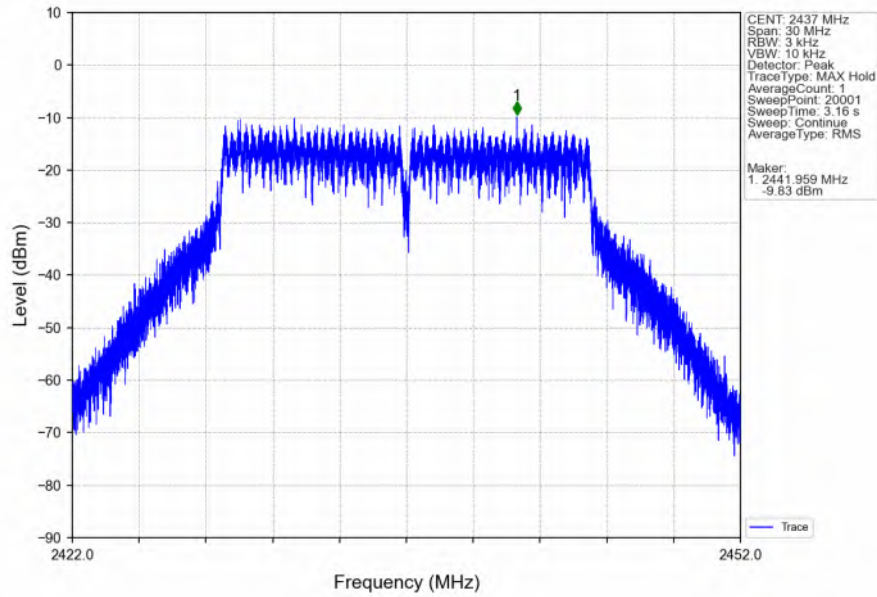


802.11g_MCH_2437MHz_Ant2 (SISO)_NTNV

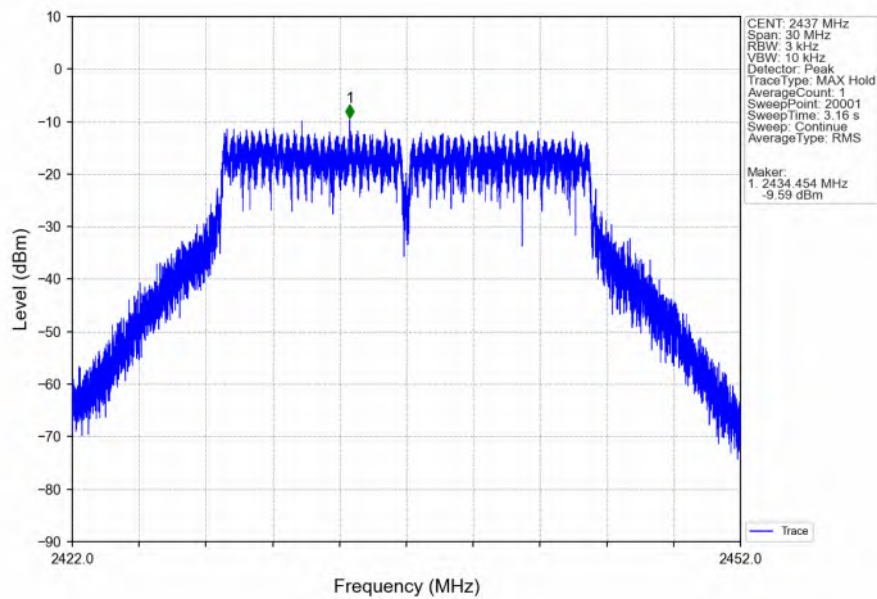


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

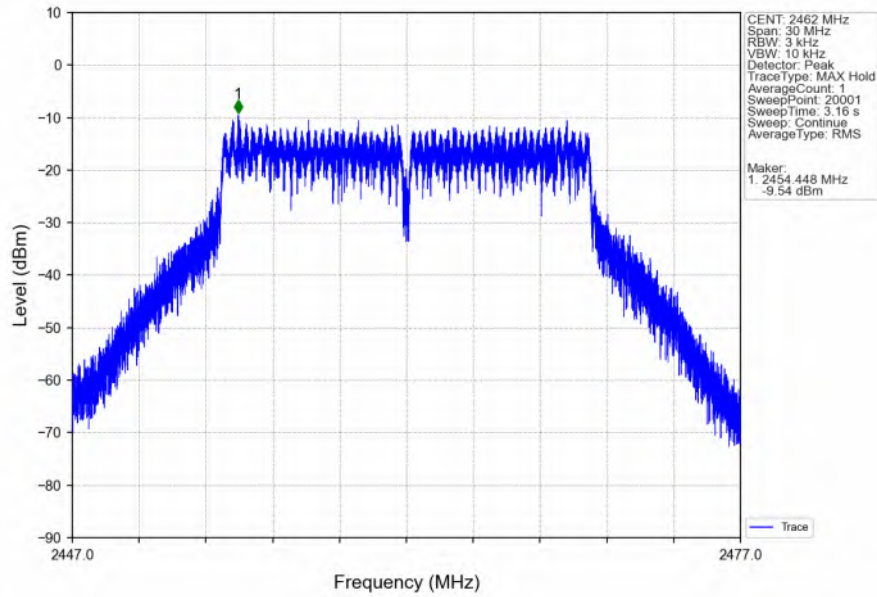


802.11g_HCH_2462MHz_Ant2 (SISO)_NTNV

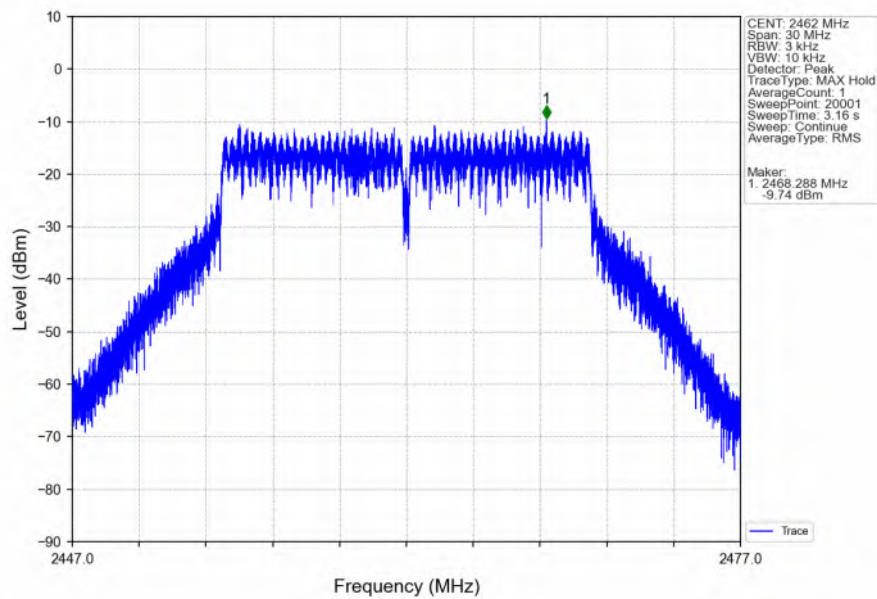


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

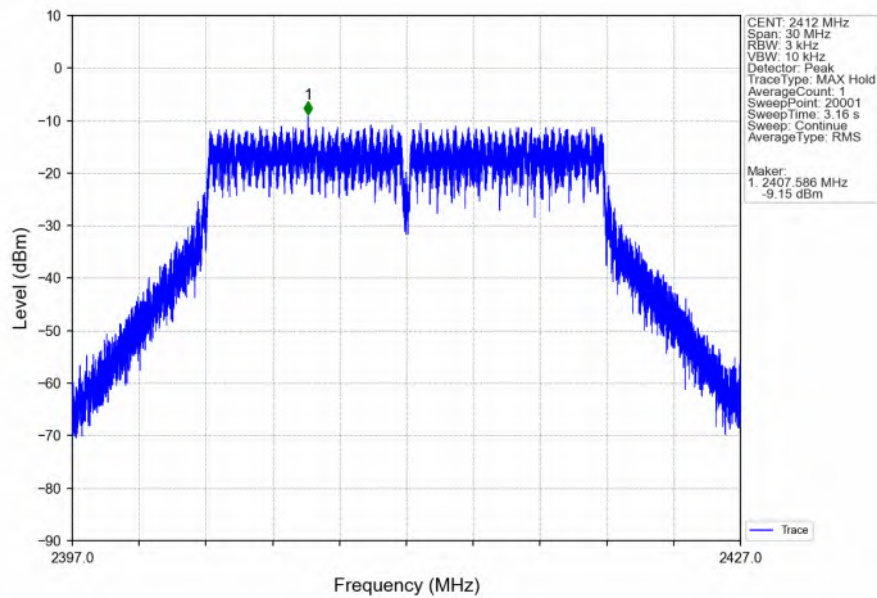


802.11n(HT20)_LCH_2412MHz_Ant2 (SISO)_NTNV

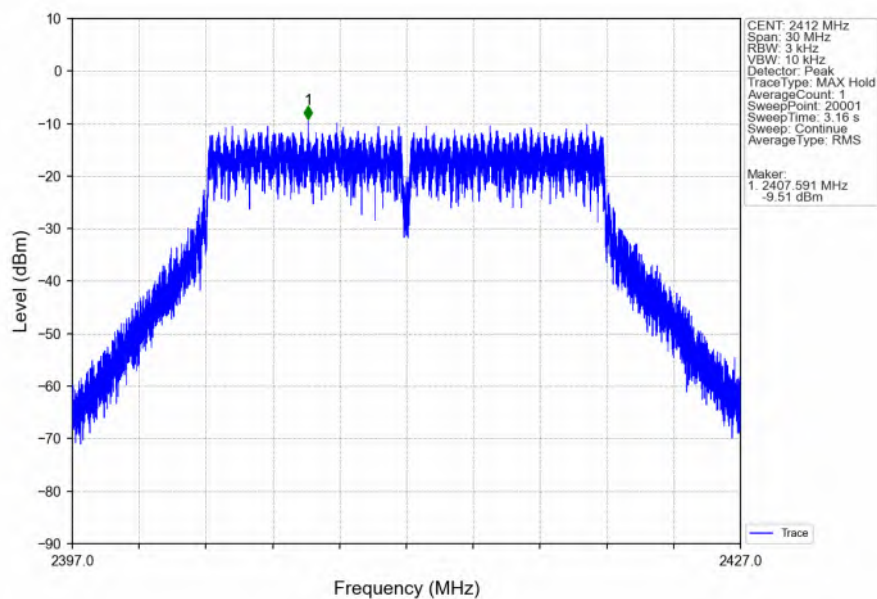


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

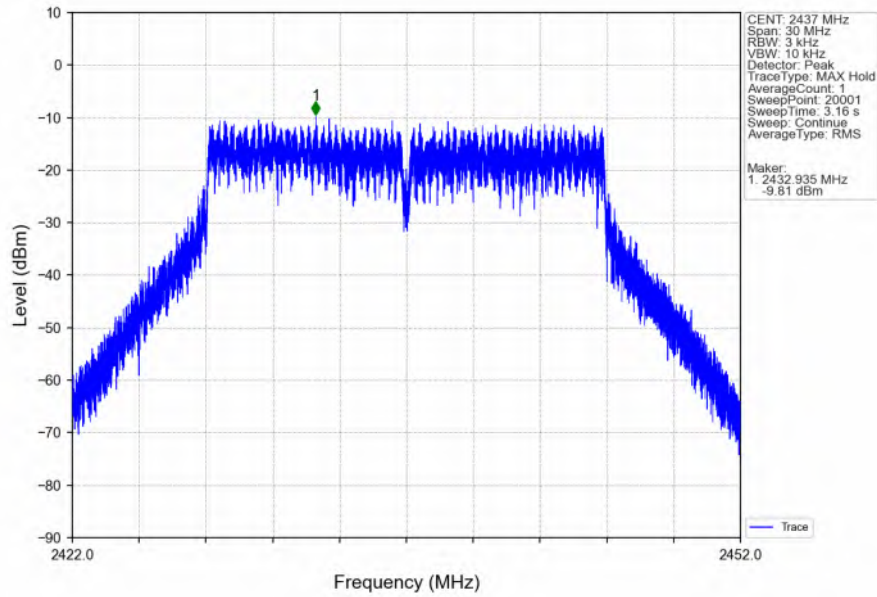


802.11n(HT20)_MCH_2437MHz_Ant2 (SISO)_NTNV

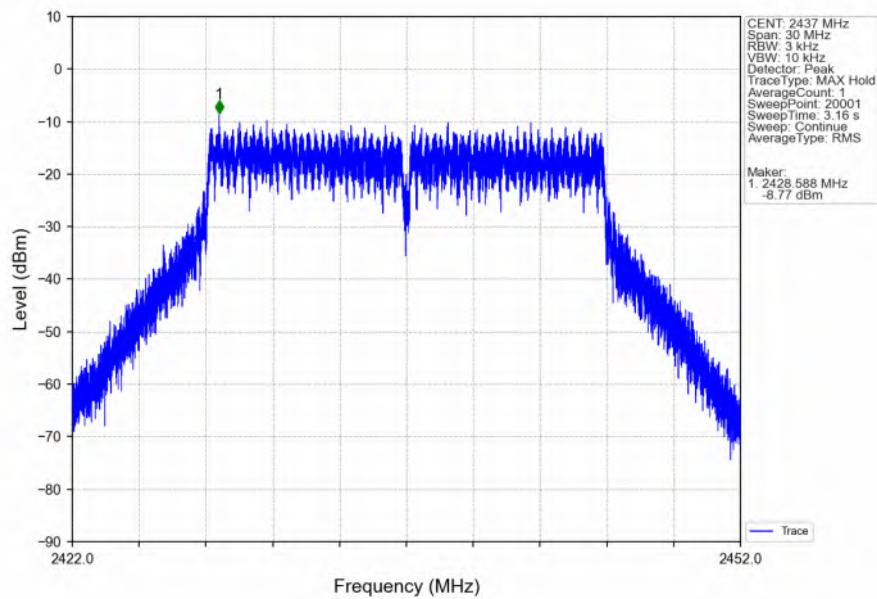


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

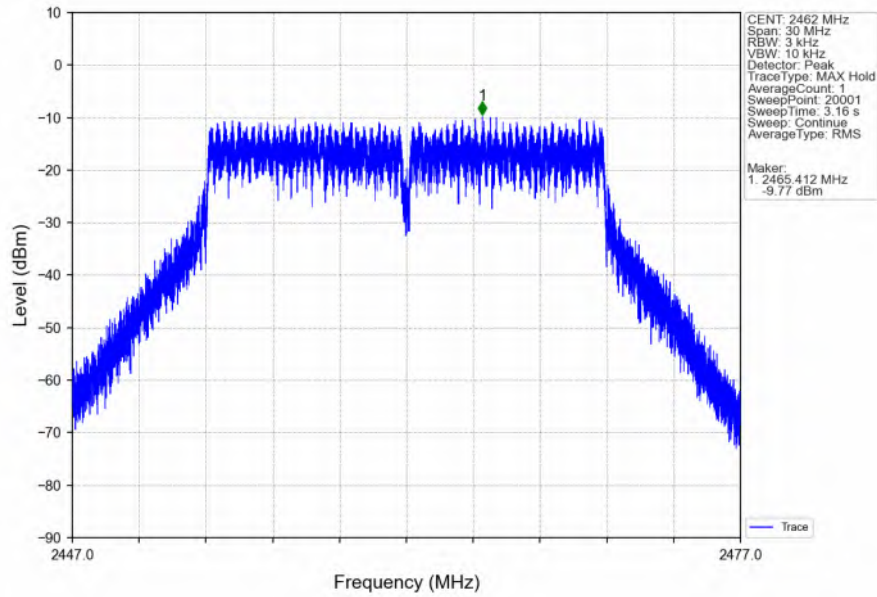


802.11n(HT20)_HCH_2462MHz_Ant2 (SISO)_NTNV

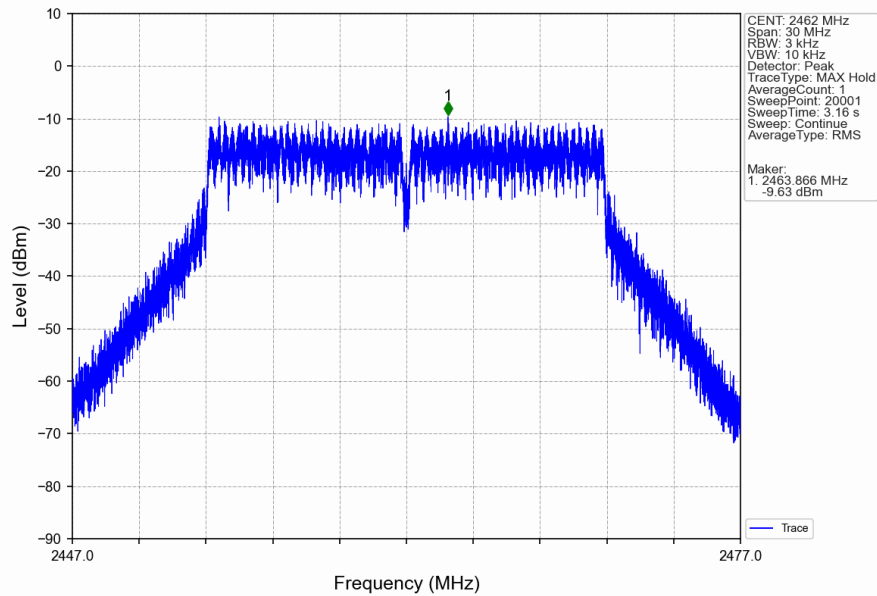


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

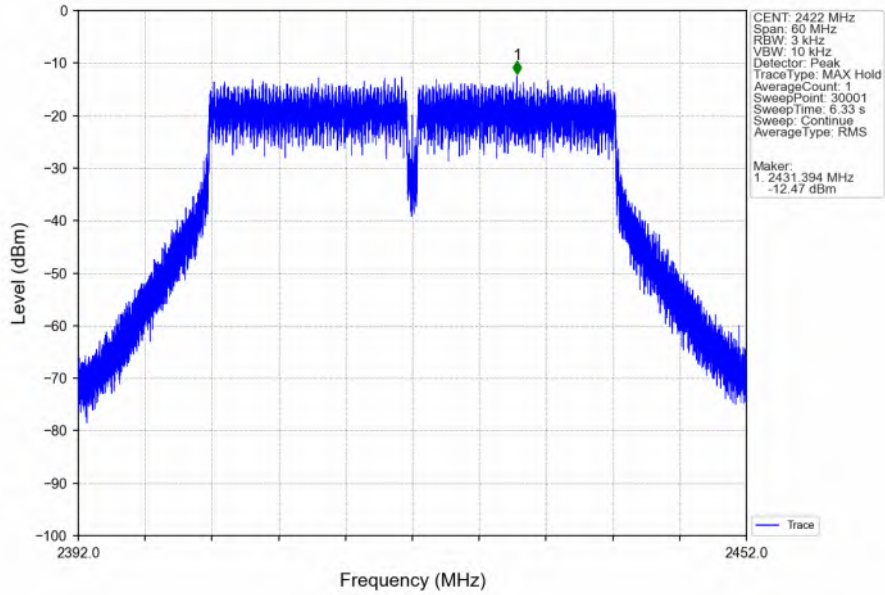


802.11n(HT40)_LCH_2422MHz_Ant2 (SISO)_NTNV

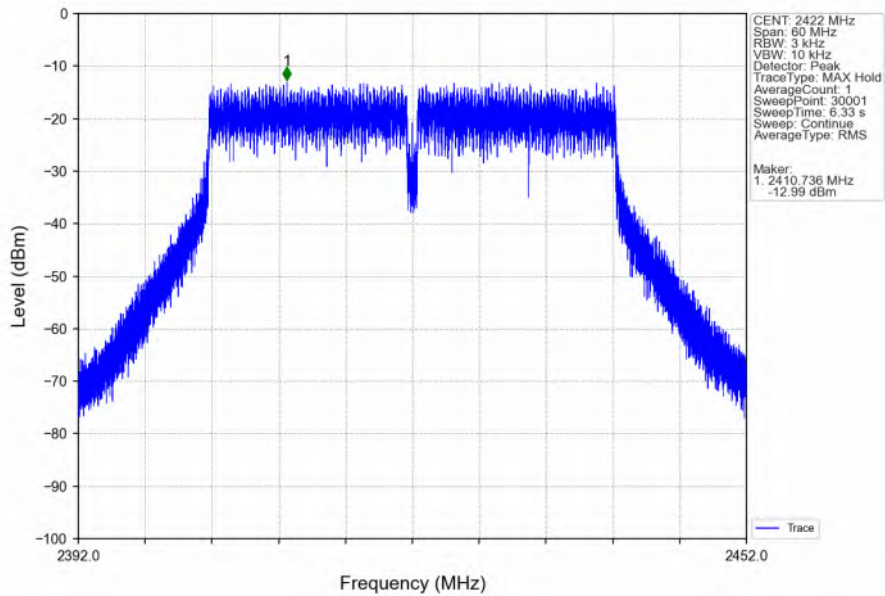


802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

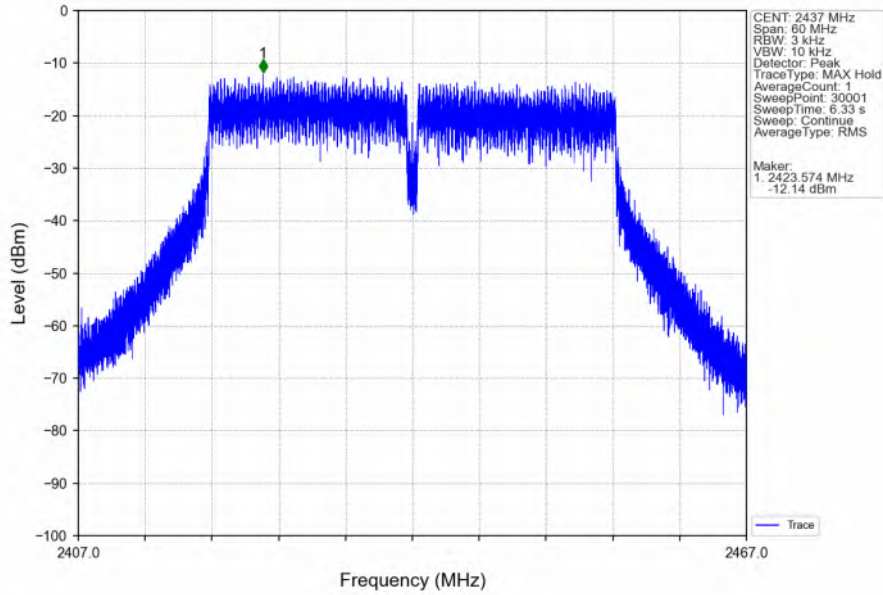


802.11n(HT40)_MCH_2437MHz_Ant2 (SISO)_NTNV

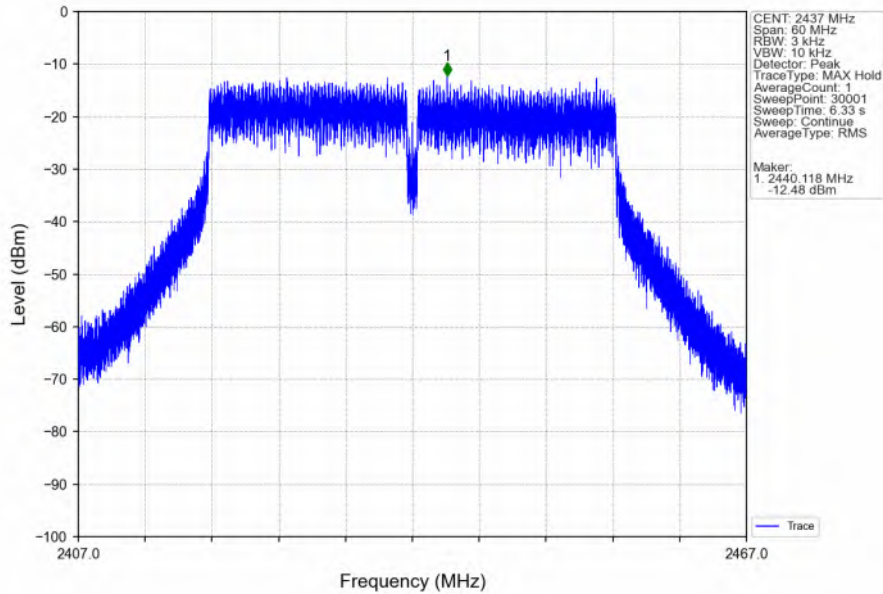


802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

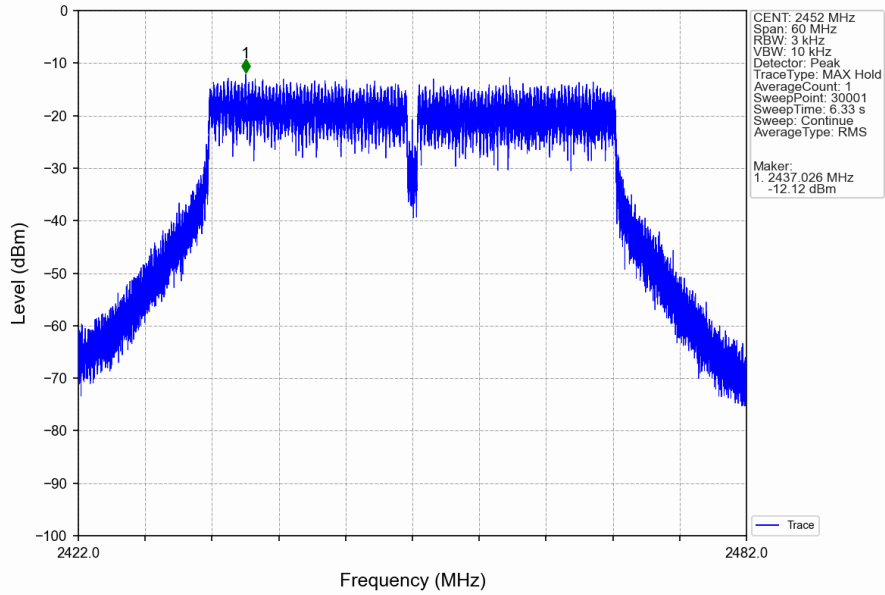


802.11n(HT40)_HCH_2452MHz_Ant2 (SISO)_NTNV

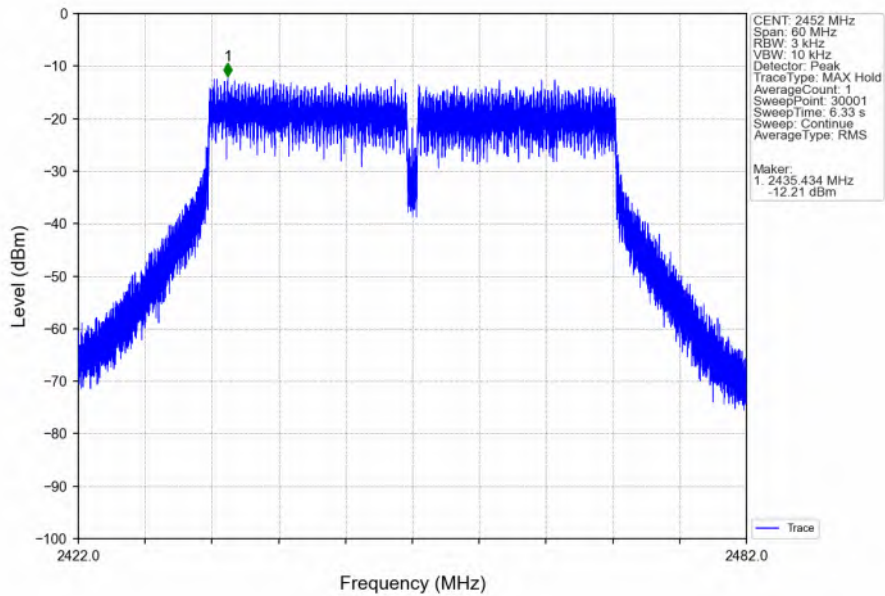


802.11ax(HEW20)_LCH_2412MHz_SU_/_Ant1 (MIMO)_NTNV

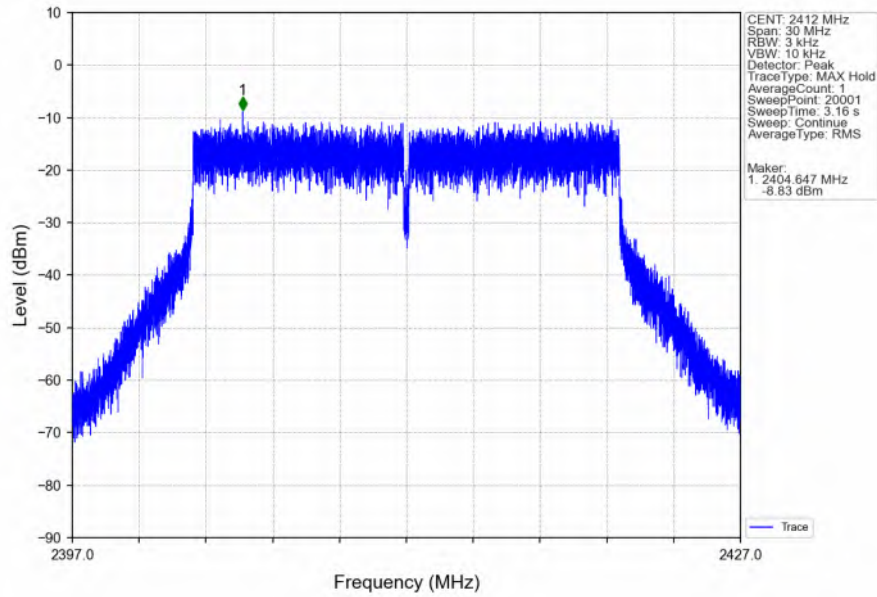


802.11ax(HEW20)_LCH_2412MHz_SU_/_Ant2 (MIMO)_NTNV

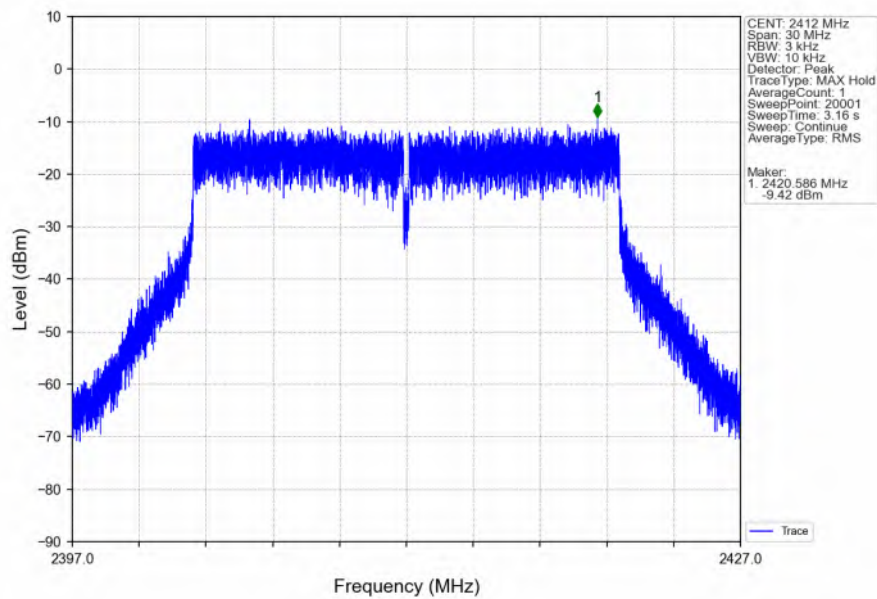


802.11ax(HEW20)_LCH_2412MHz_SU_/_MIMO_NTNV

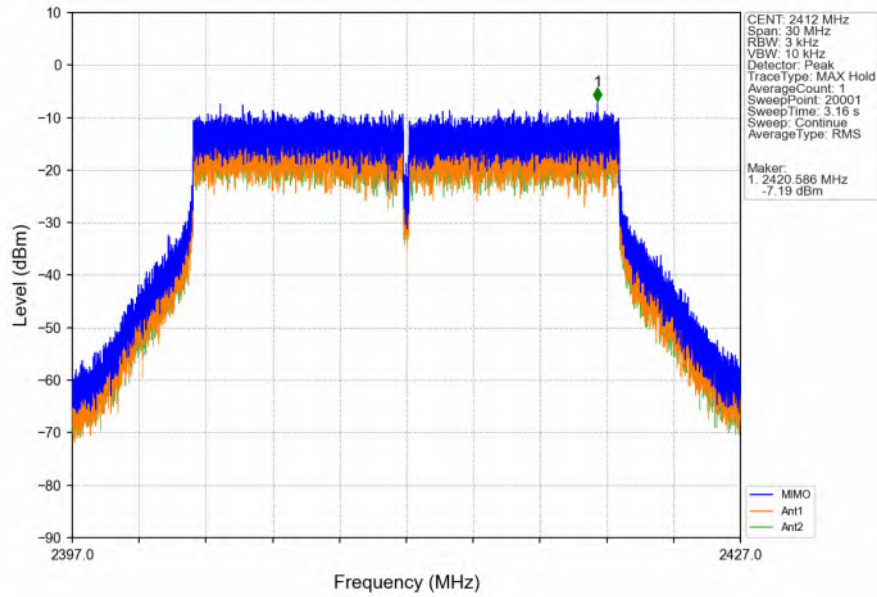


802.11ax(HEW20)_MCH_2437MHz_SU_/_Ant1 (MIMO)_NTNV

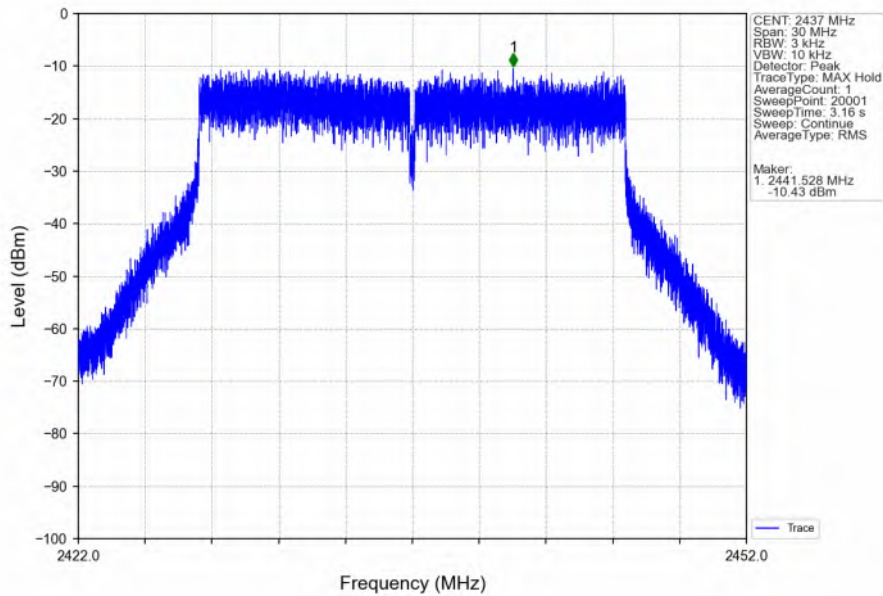


802.11ax(HEW20)_MCH_2437MHz_SU_ / _Ant2 (MIMO)_NTNV

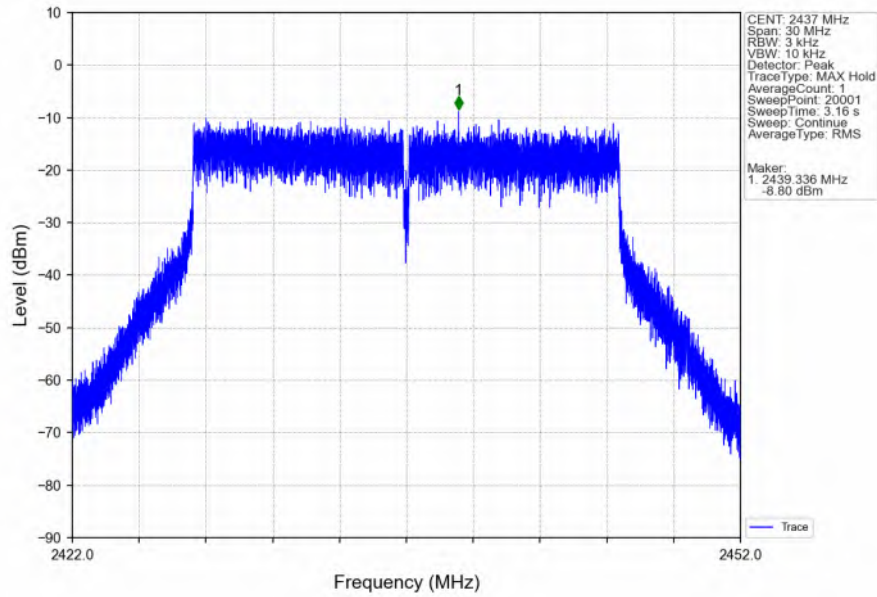


802.11ax(HEW20)_MCH_2437MHz_SU_ / _MIMO_NTNV

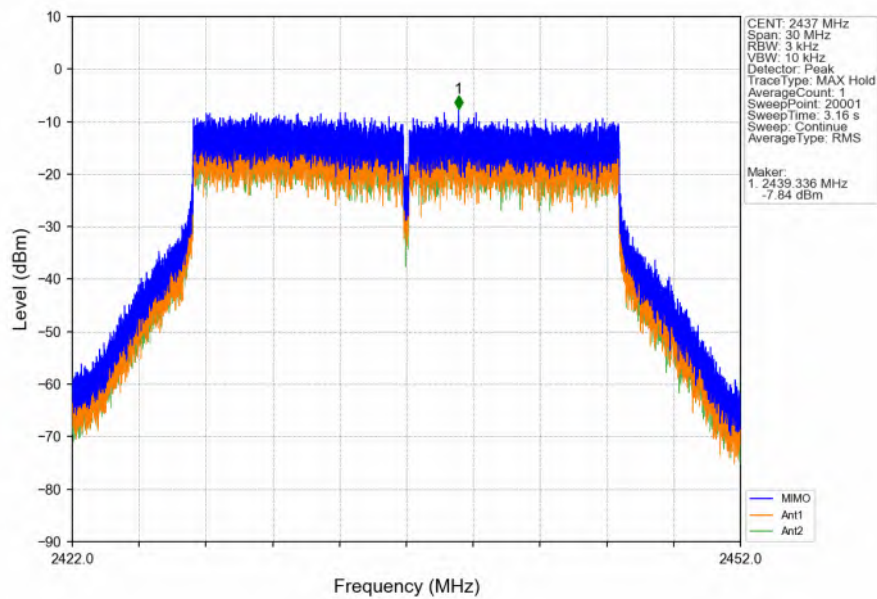


802.11ax(HEW20)_HCH_2462MHz_SU_/_Ant1 (MIMO)_NTNV

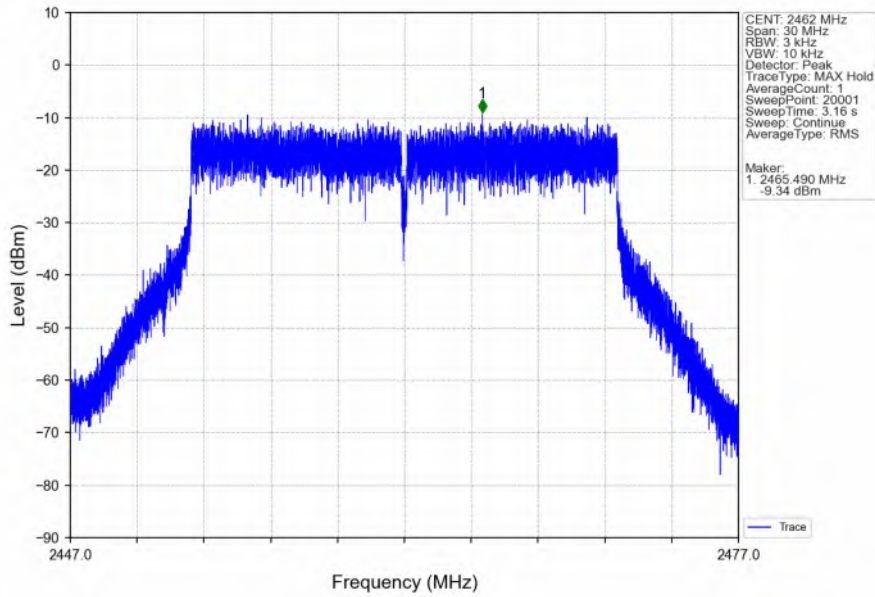


802.11ax(HEW20)_HCH_2462MHz_SU_/_Ant2 (MIMO)_NTNV

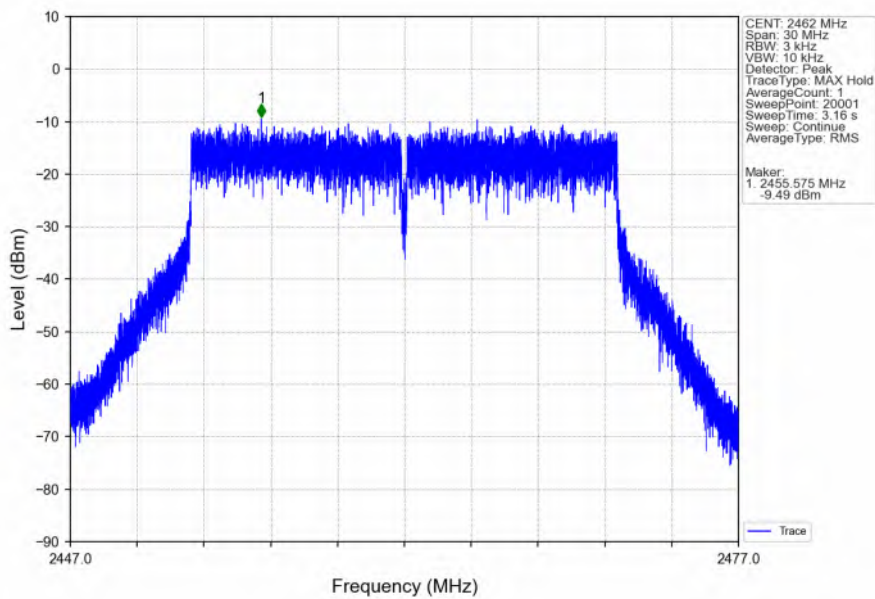


802.11ax(HEW20)_HCH_2462MHz_SU_/_MIMO_NTNV

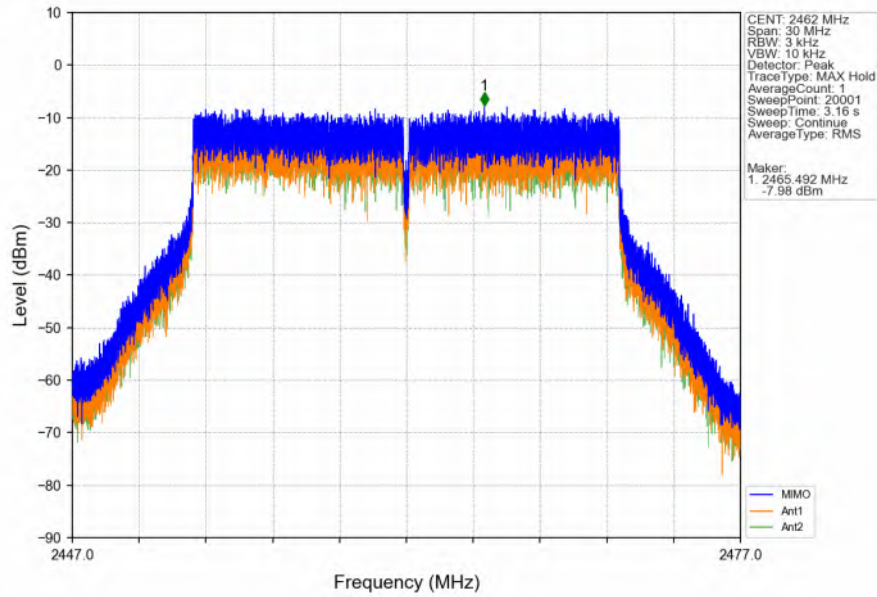


802.11ax(HEW40)_LCH_2422MHz_SU_/_Ant1 (MIMO)_NTNV

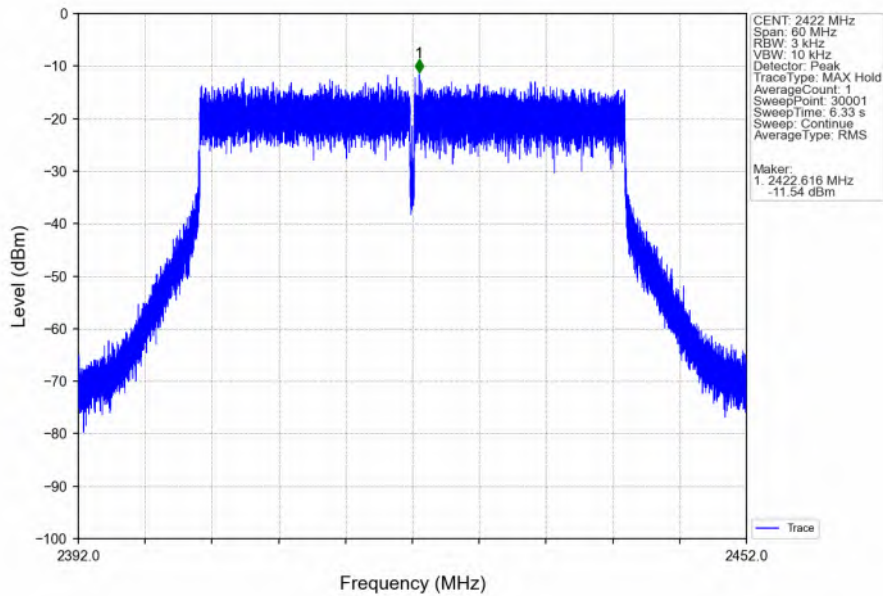


802.11ax(HEW40)_LCH_2422MHz_SU_/_Ant2 (MIMO)_NTNV

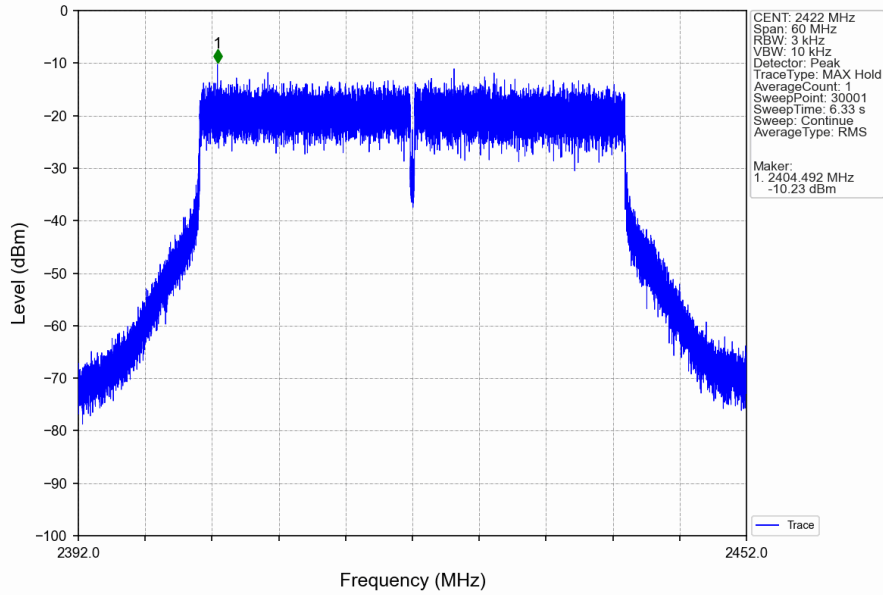


802.11ax(HEW40)_LCH_2422MHz_SU_/_MIMO_NTNV

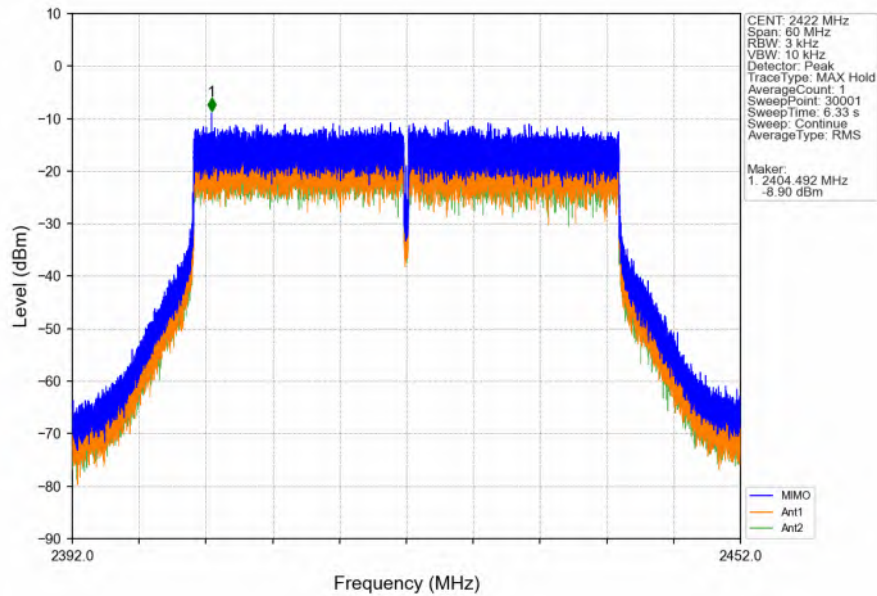


802.11ax(HEW40)_MCH_2437MHz_SU_/_Ant1 (MIMO)_NTNV

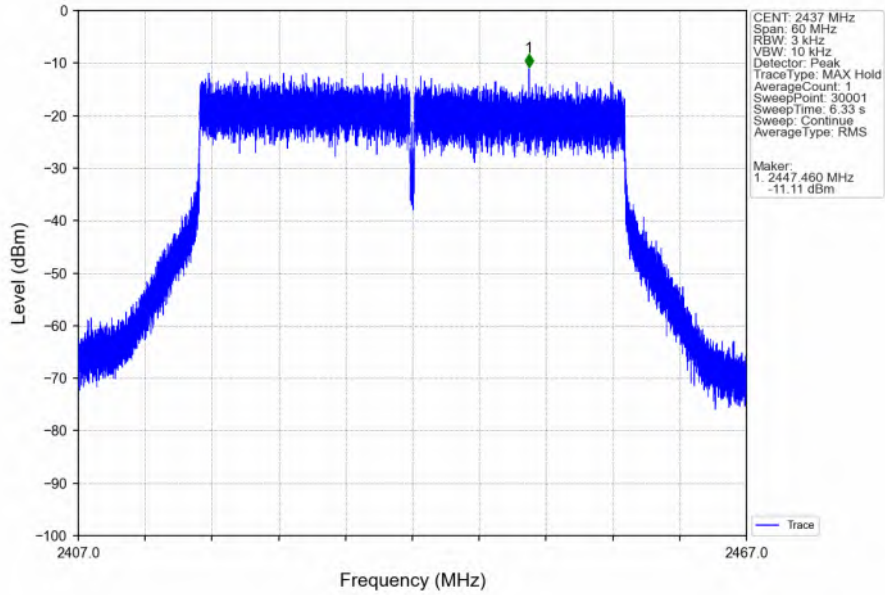


802.11ax(HEW40)_MCH_2437MHz_SU_/_Ant2 (MIMO)_NTNV

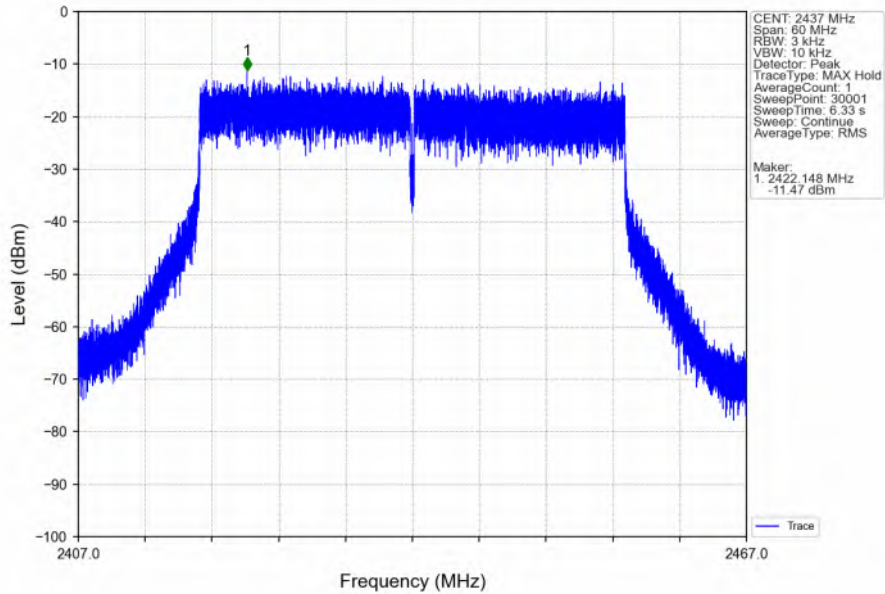


802.11ax(HEW40)_MCH_2437MHz_SU_/_MIMO_NTNV

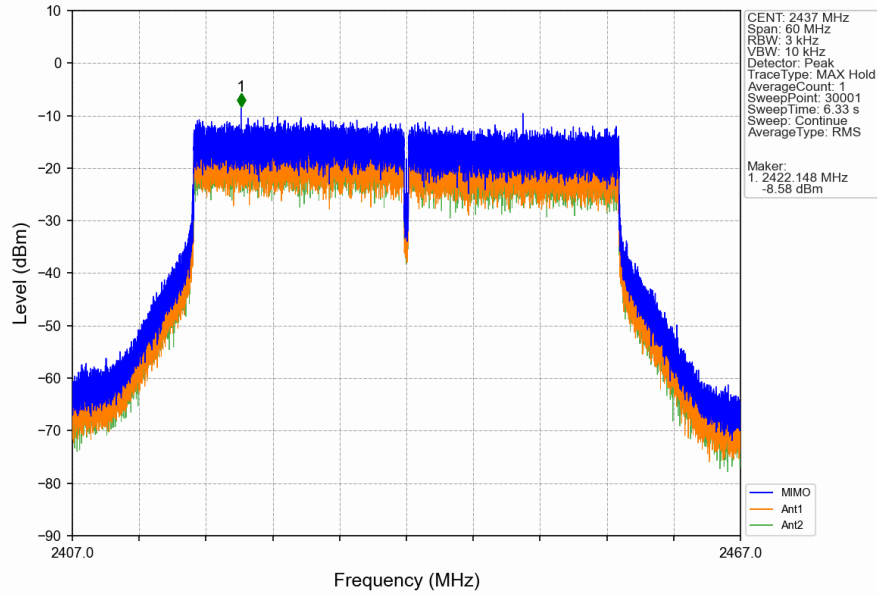

802.11ax(HEW40)_HCH_2452MHz_SU_/_Ant1 (MIMO)_NTNV

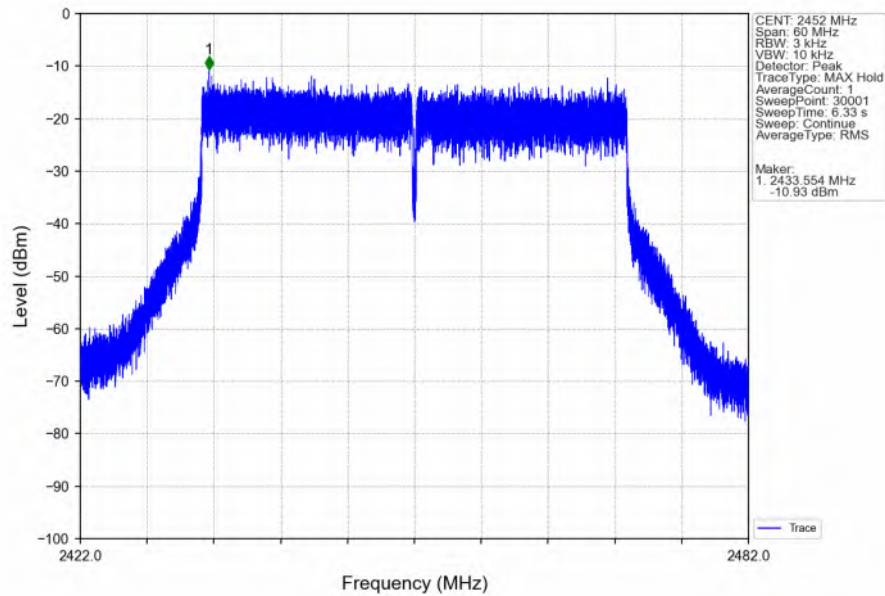

802.11ax(HEW40)_HCH_2452MHz_SU_/_Ant2 (MIMO)_NTNV

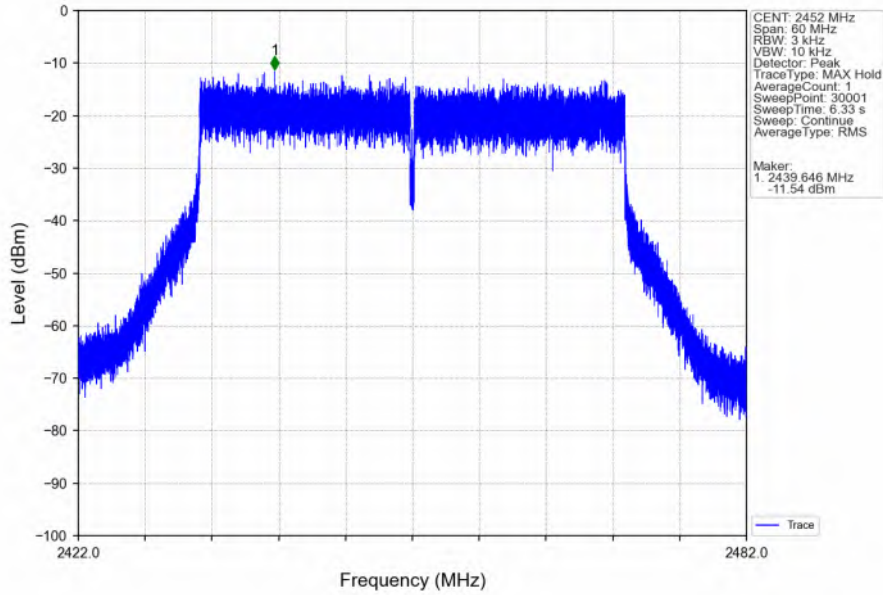

802.11ax(HEW40)_HCH_2452MHz_SU_/_MIMO_NTNV

