



11a_TX_CH_149_Horizontal_Peak

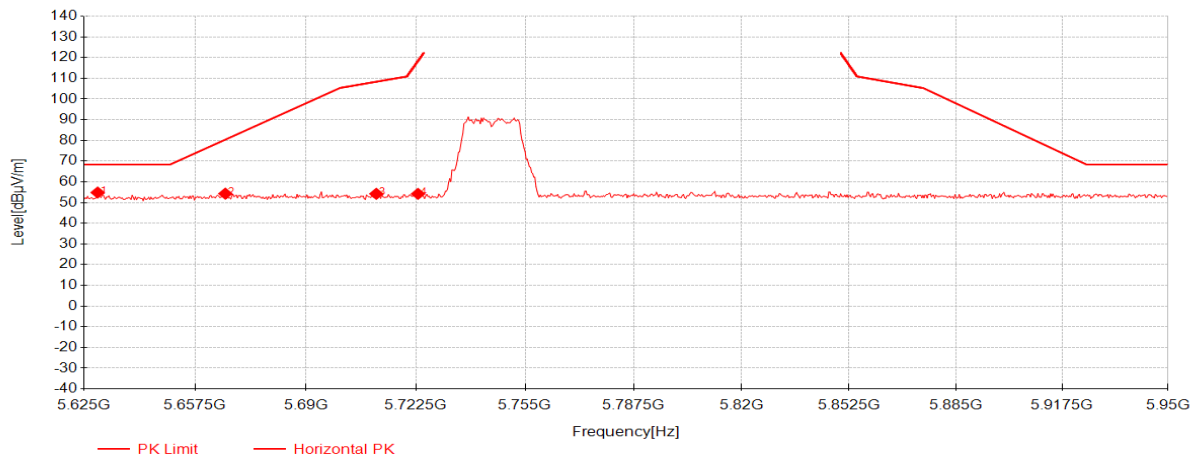


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5628.9	38.72	33.39	-17.26	54.85	68.30	13.45	Horizontal
2	5666.275	38.10	33.50	-17.30	54.30	80.38	26.08	Horizontal
3	5710.8	37.87	33.63	-17.30	54.21	108.33	54.12	Horizontal
4	5723.15	37.79	33.67	-17.26	54.20	118.08	63.88	Horizontal

11a_TX_CH_149_Vertical_Peak

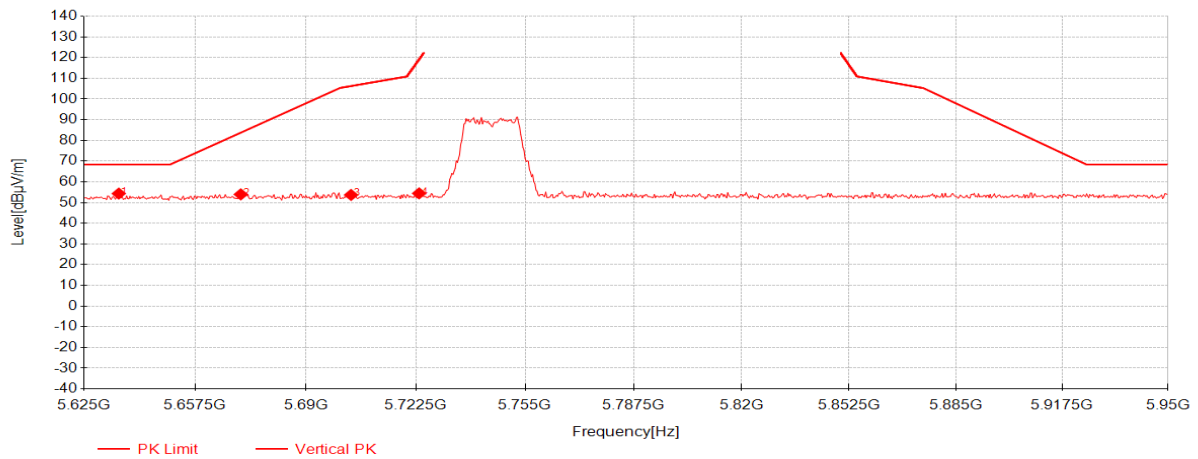


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5635.075	38.20	33.41	-17.27	54.34	68.30	13.96	Vertical
2	5670.825	37.74	33.51	-17.30	53.95	83.75	29.80	Vertical
3	5703.325	37.38	33.61	-17.32	53.67	106.23	52.56	Vertical
4	5723.475	38.02	33.67	-17.26	54.43	118.82	64.39	Vertical

11a_TX_CH_165_Horizontal_Peak

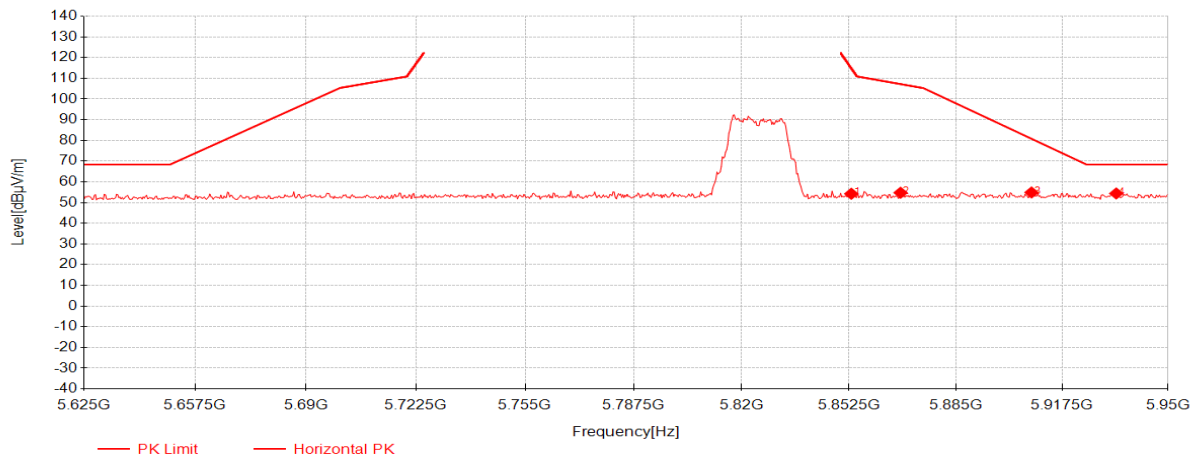


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5853.15	37.10	34.06	-16.91	54.25	115.12	60.87	Horizontal
2	5868.1	37.52	34.10	-16.88	54.75	107.23	52.48	Horizontal
3	5908.075	37.47	34.22	-16.84	54.86	80.79	25.93	Horizontal
4	5934.075	37.00	34.30	-16.92	54.39	68.30	13.91	Horizontal

11a_TX_CH_165_Veritical_Peak

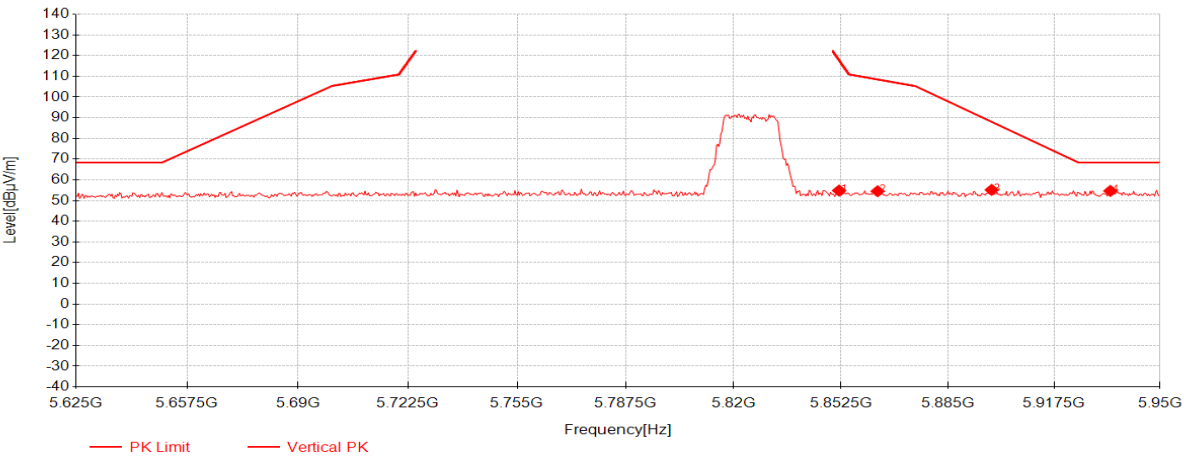


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5851.85	37.69	34.06	-16.91	54.83	118.08	63.25	Vertical
2	5863.55	37.30	34.09	-16.89	54.50	108.50	54.00	Vertical
3	5898.325	37.77	34.19	-16.81	55.15	88.00	32.85	Vertical
4	5934.725	37.26	34.30	-16.92	54.65	68.30	13.65	Vertical

018_11be(EHT20)_TX_CH_36_Horizontal_Peak

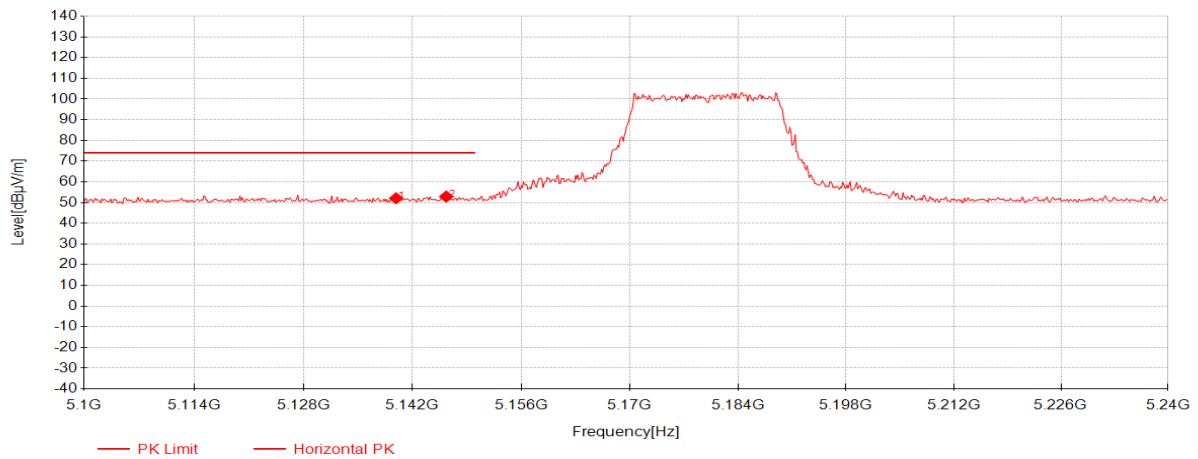

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5139.9	37.20	33.07	-18.21	52.06	74.00	21.94	Horizontal
2	5146.34	38.02	33.07	-18.19	52.90	74.00	21.10	Horizontal


019_11be(EHT20)_TX_CH_36_Horizontal_Average

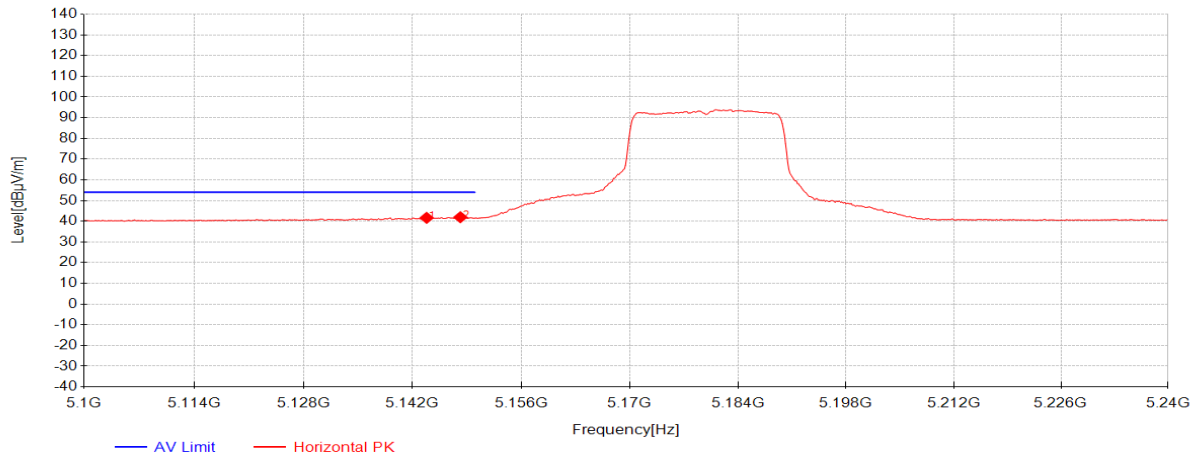

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5143.82	26.77	33.07	-18.20	41.64	54.00	12.36	Horizontal
2	5148.16	27.07	33.07	-18.19	41.95	54.00	12.05	Horizontal




020_11be(EHT20)_TX_CH_36_Vetical_Peak

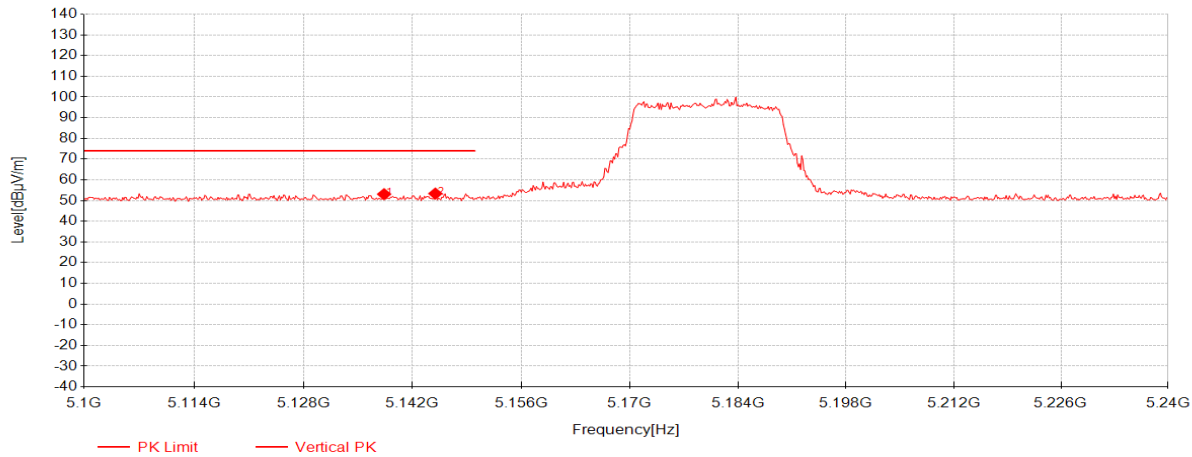


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5138.36	38.23	33.07	-18.21	53.09	74.00	20.91	Vertical
2	5144.94	38.49	33.07	-18.20	53.37	74.00	20.63	Vertical

021_11be(EHT20)_TX_CH_36_Vetical_Average

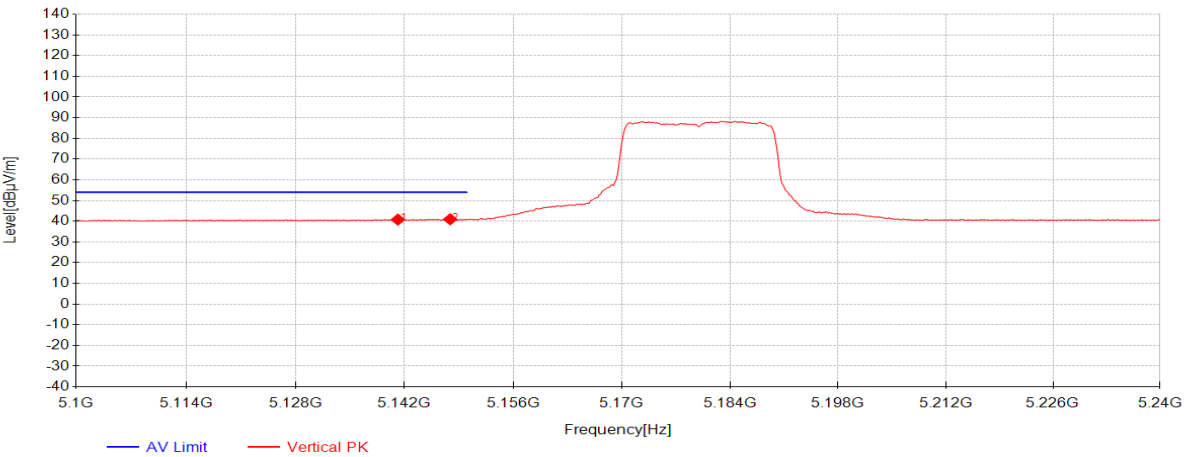


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5141.16	25.92	33.07	-18.21	40.79	54.00	13.21	Vertical
2	5147.88	26.07	33.07	-18.19	40.95	54.00	13.05	Vertical

022_11be(EHT20)_TX_CH_64_Horizontal_Peak

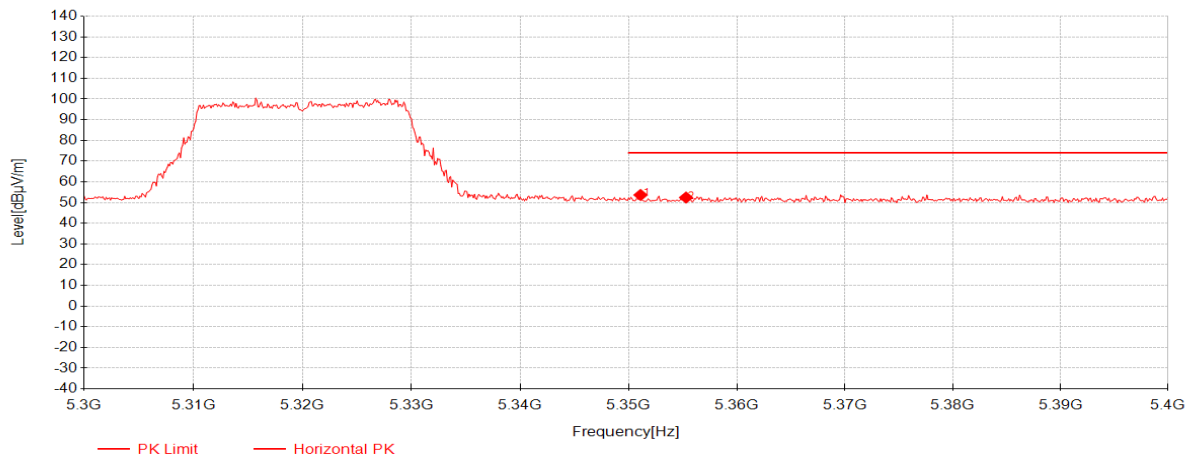


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5351.1	38.37	33.03	-17.75	53.65	74.00	20.35	Horizontal
2	5355.3	37.16	33.03	-17.76	52.43	74.00	21.57	Horizontal

023_11be(EHT20)_TX_CH_64_Horizontal_Average

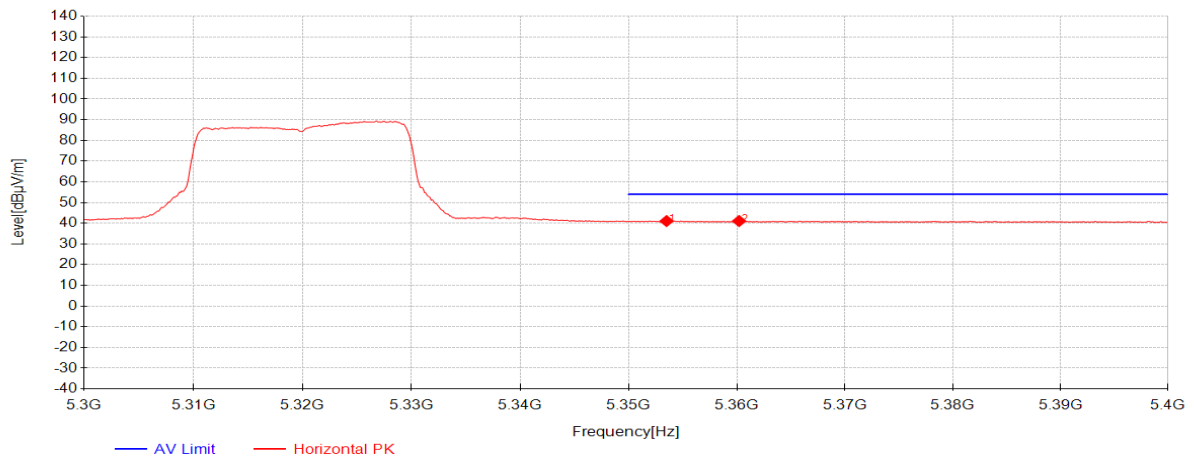

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5353.5	25.79	33.03	-17.75	41.06	54.00	12.94	Horizontal
2	5360.2	25.81	33.03	-17.76	41.07	54.00	12.93	Horizontal


024_11be(EHT20)_TX_CH_64_Veritical_Peak

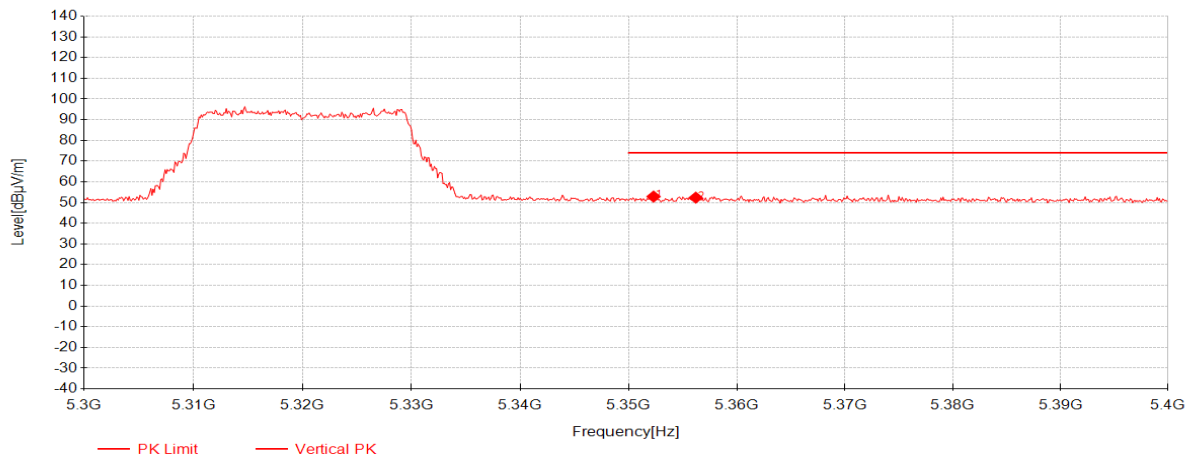

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5352.3	37.60	33.03	-17.75	52.88	74.00	21.12	Vertical
2	5356.2	37.11	33.03	-17.76	52.38	74.00	21.62	Vertical




025_11be(EHT20)_TX_CH_64_Vetical_Average

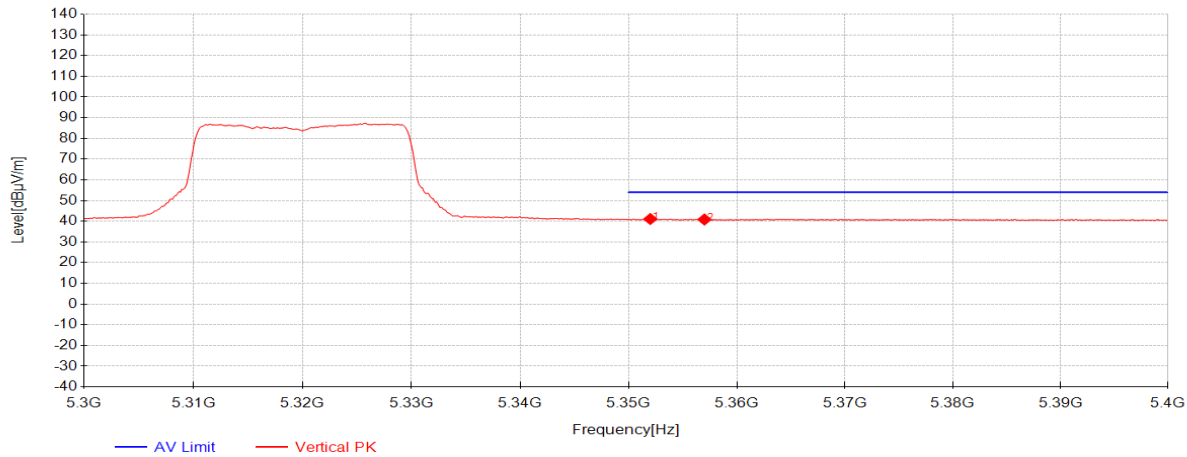

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5352	25.81	33.03	-17.75	41.09	54.00	12.91	Vertical
2	5357	25.58	33.03	-17.76	40.85	54.00	13.15	Vertical


026_11be(EHT20)_TX_CH_100_Horizontal_Peak

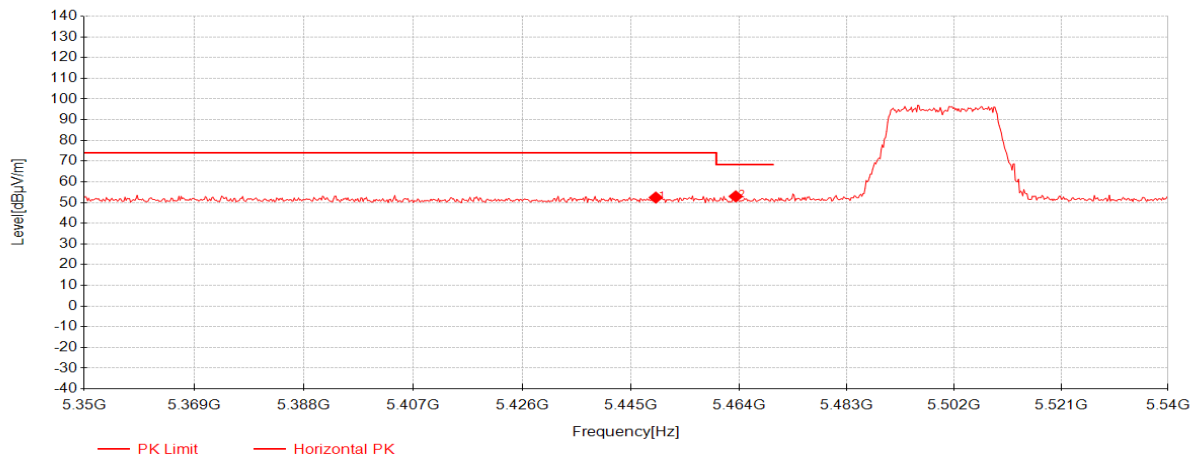

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5449.37	37.05	33.01	-17.67	52.39	74.00	21.61	Horizontal
2	5463.43	37.60	33.01	-17.63	52.98	68.30	15.32	Horizontal




027_11be(EHT20)_TX_CH_100_Horizontal_Average

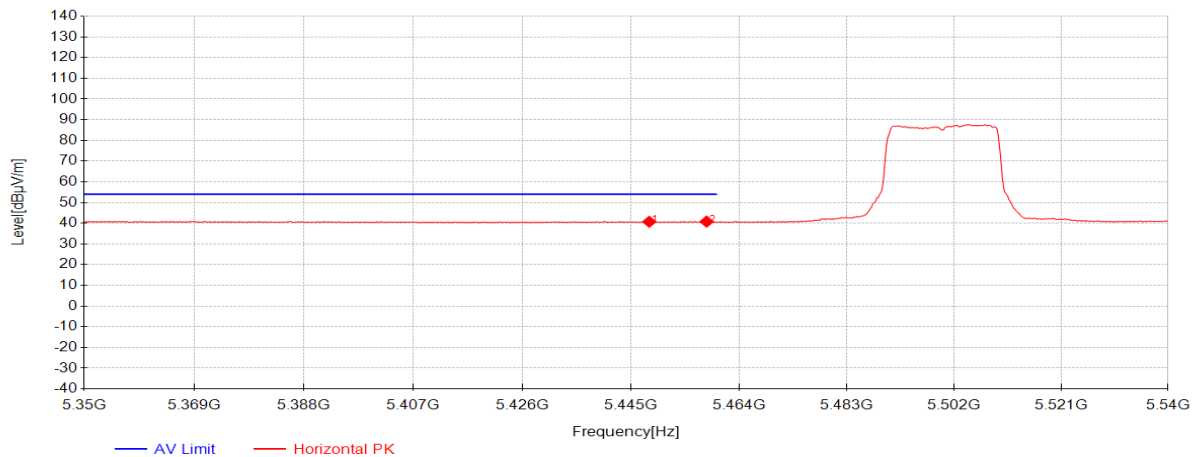


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5448.23	25.37	33.01	-17.68	40.71	54.00	13.29	Horizontal
2	5458.3	25.44	33.01	-17.65	40.80	54.00	13.20	Horizontal

028_11be(EHT20)_TX_CH_100_Vertical_Peak

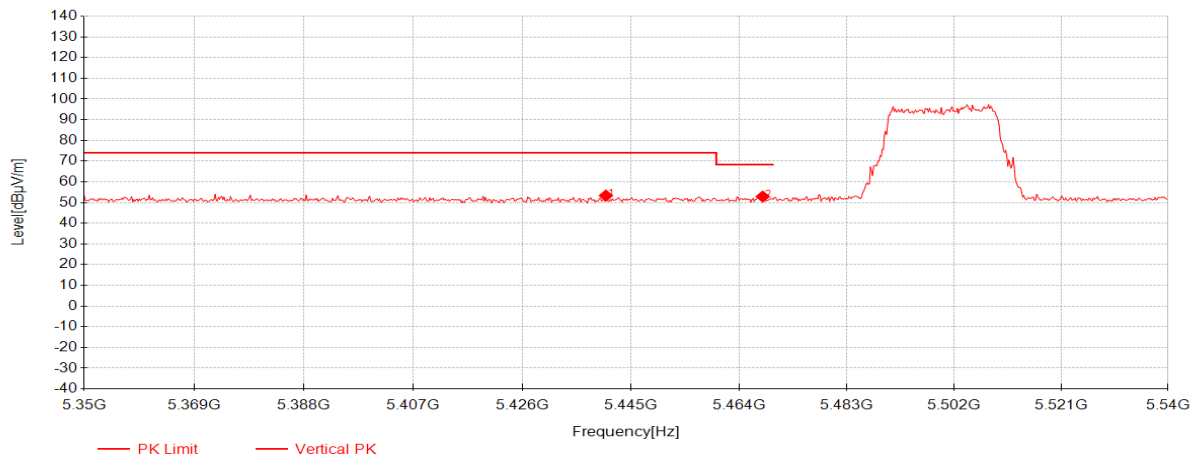


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5440.63	38.05	33.01	-17.70	53.36	74.00	20.64	Vertical
2	5468.18	37.49	33.01	-17.62	52.88	68.30	15.42	Vertical

029_11be(EHT20)_TX_CH_100_Veritical_Average

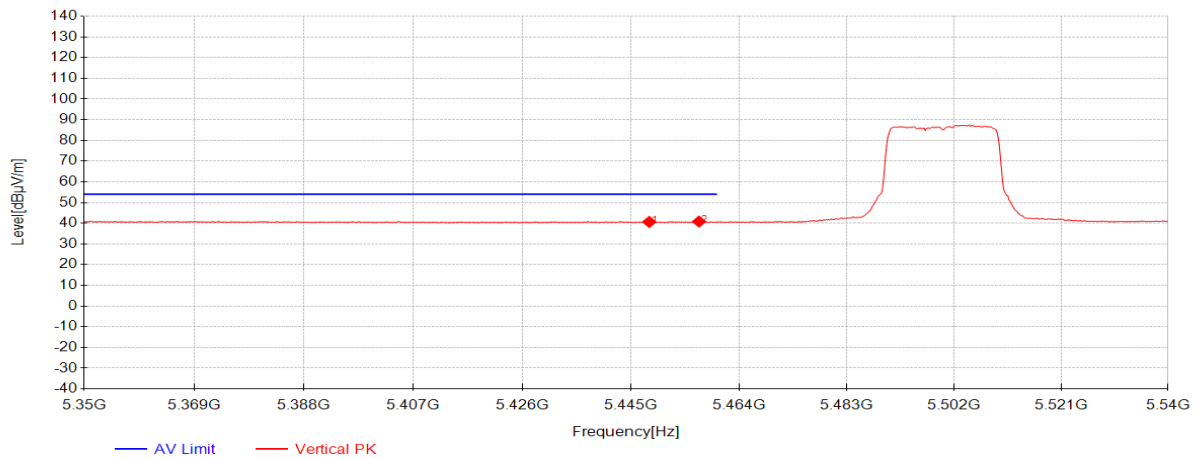


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5448.23	25.30	33.01	-17.68	40.64	54.00	13.36	Vertical
2	5456.97	25.45	33.01	-17.65	40.81	54.00	13.19	Vertical

030_11be(EHT20)_TX_CH_140_Horizontal_Peak

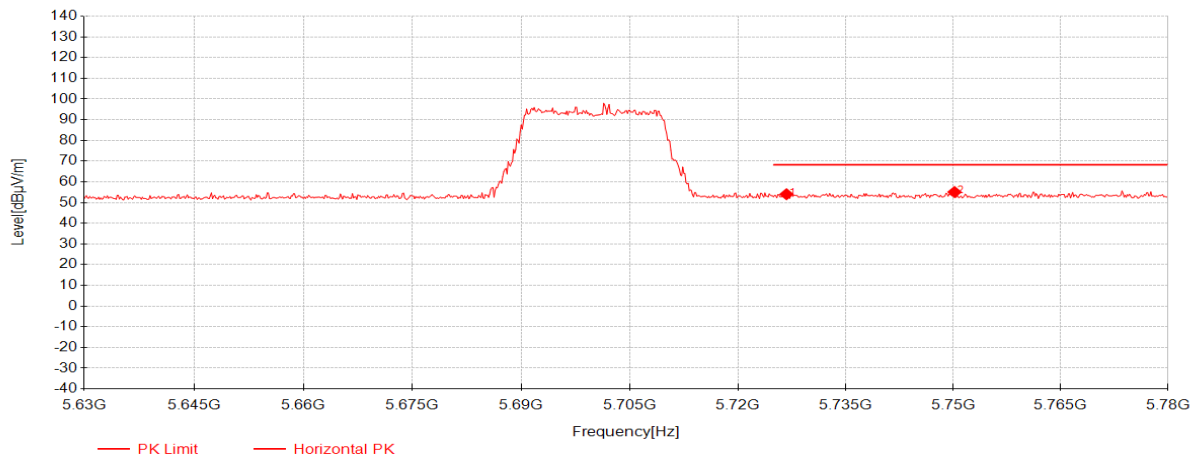


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5726.75	37.59	33.68	-17.25	54.02	68.20	14.18	Horizontal
2	5750.15	38.50	33.75	-17.17	55.08	68.20	13.12	Horizontal

031_11be(EHT20)_TX_CH_140_Veritical_Peak

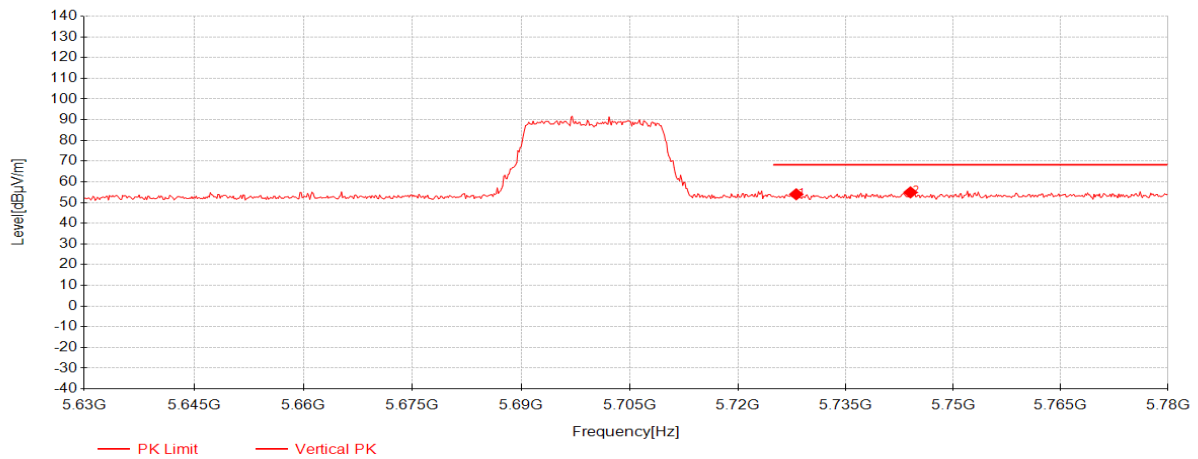


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5728.1	37.55	33.68	-17.24	53.99	68.20	14.21	Vertical
2	5744	38.37	33.73	-17.19	54.91	68.20	13.29	Vertical

032_11be(EHT20)_TX_CH_149_Horizontal_Peak

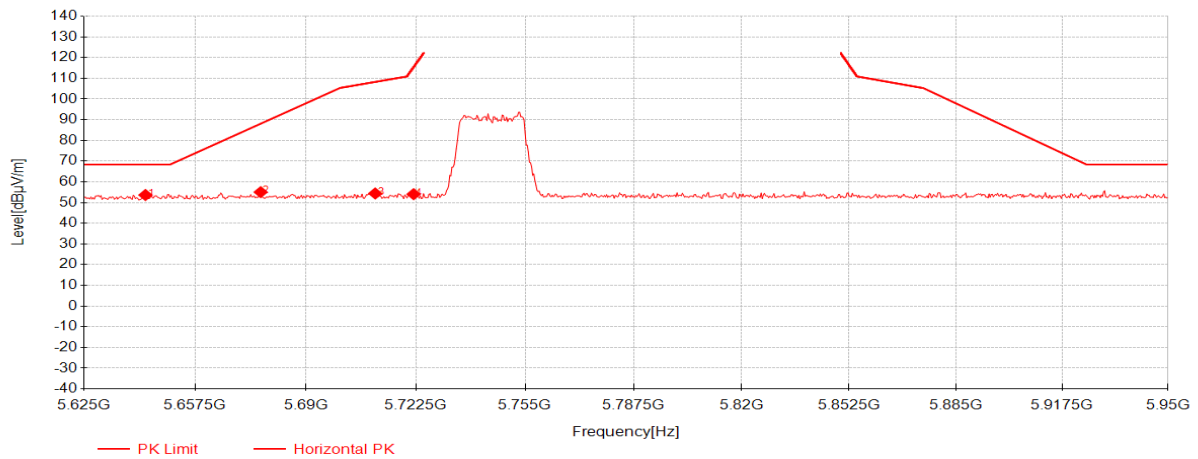


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5642.875	37.48	33.43	-17.27	53.64	68.30	14.66	Horizontal
2	5676.675	38.81	33.53	-17.31	55.03	88.08	33.05	Horizontal
3	5710.475	38.05	33.63	-17.30	54.38	108.24	53.86	Horizontal
4	5721.85	37.64	33.67	-17.26	54.04	115.12	61.08	Horizontal

033_11be(EHT20)_TX_CH_149_Veritical_Peak

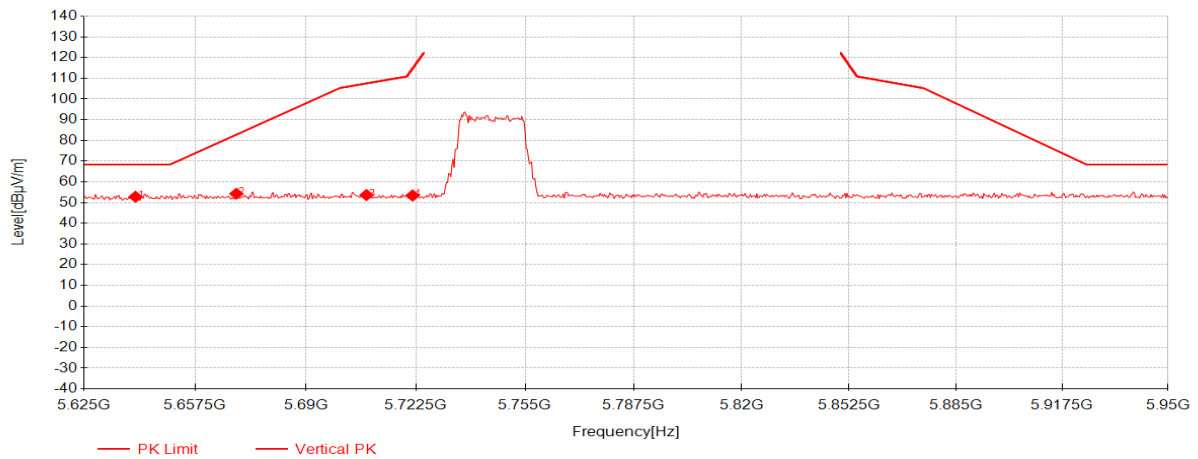


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5639.95	36.65	33.42	-17.27	52.80	68.30	15.50	Vertical
2	5669.525	38.05	33.51	-17.30	54.26	82.79	28.53	Vertical
3	5707.875	37.31	33.62	-17.31	53.63	107.51	53.88	Vertical
4	5721.525	37.01	33.66	-17.26	53.41	114.38	60.97	Vertical

034_11be(EHT20)_TX_CH_165_Horizontal_Peak

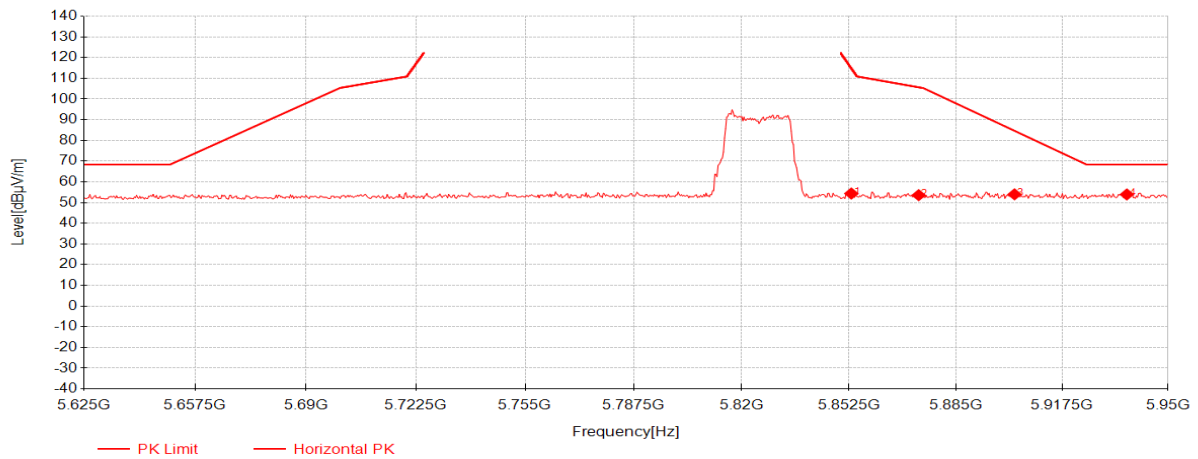


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5853.15	37.21	34.06	-16.91	54.36	115.12	60.76	Horizontal
2	5873.625	36.29	34.12	-16.87	53.55	105.68	52.13	Horizontal
3	5902.875	36.57	34.21	-16.82	53.96	84.63	30.67	Horizontal
4	5937.325	36.52	34.31	-16.93	53.91	68.30	14.39	Horizontal

035_11be(EHT20)_TX_CH_165_Veritical_Peak

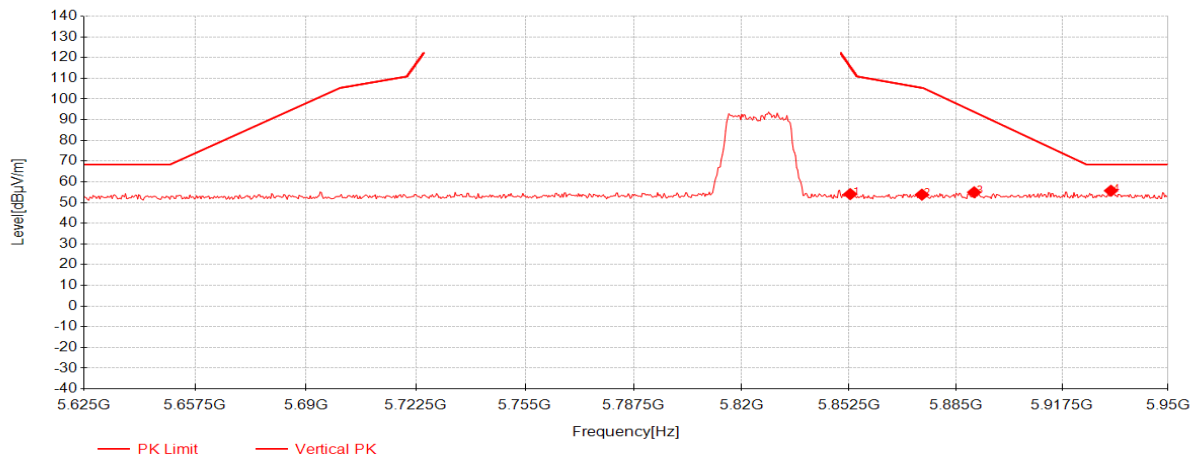

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5852.825	36.93	34.06	-16.91	54.08	115.86	61.78	Vertical
2	5874.6	36.55	34.12	-16.86	53.81	105.41	51.60	Vertical
3	5890.525	37.63	34.17	-16.83	54.97	93.78	38.81	Vertical
4	5932.45	38.32	34.30	-16.91	55.71	68.30	12.59	Vertical


036_11be(EHT40)_TX_CH_38_Horizontal_Peak

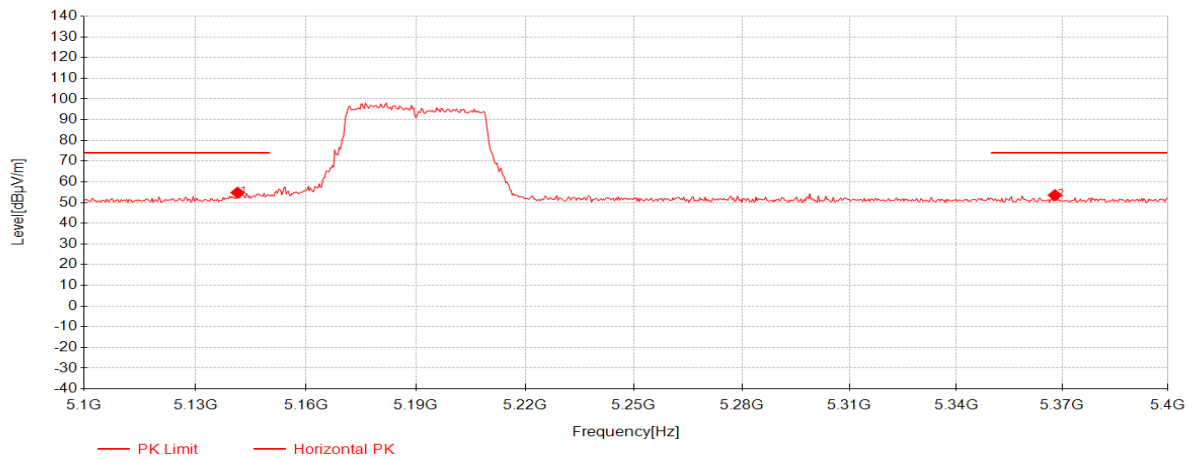

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5141.4	39.89	33.07	-18.21	54.76	74.00	19.24	Horizontal
2	5367.9	38.30	33.03	-17.78	53.55	74.00	20.45	Horizontal




037_11be(EHT40)_TX_CH_38_Horizontal_Average

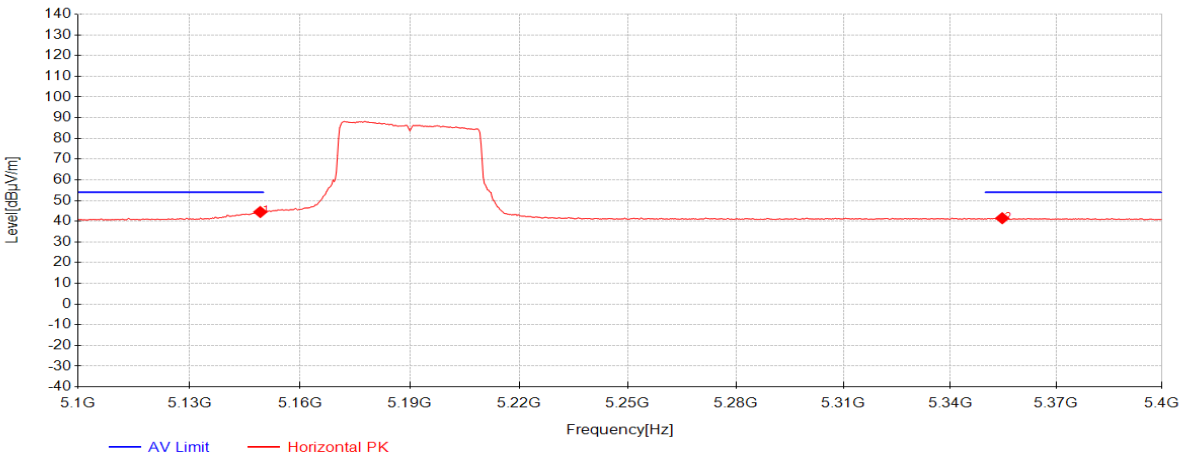

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5149.2	29.57	33.07	-18.18	44.46	54.00	9.54	Horizontal
2	5354.7	26.19	33.03	-17.76	41.46	54.00	12.54	Horizontal


038_11be(EHT40)_TX_CH_38_Veritical_Peak

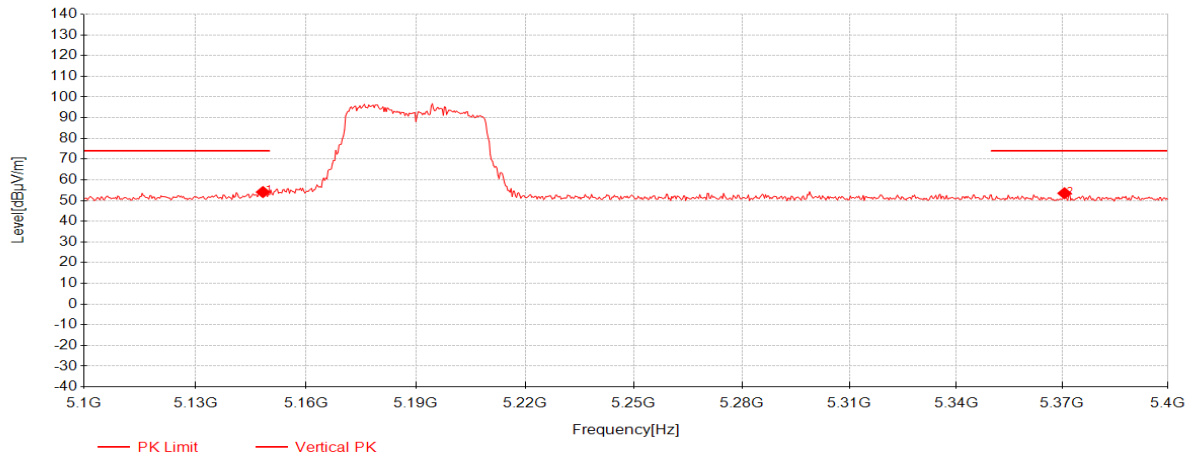

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.3	39.20	33.07	-18.19	54.09	74.00	19.91	Vertical
2	5370.6	38.27	33.03	-17.78	53.52	74.00	20.48	Vertical




039_11be(EHT40)_TX_CH_38_Vetical_Average

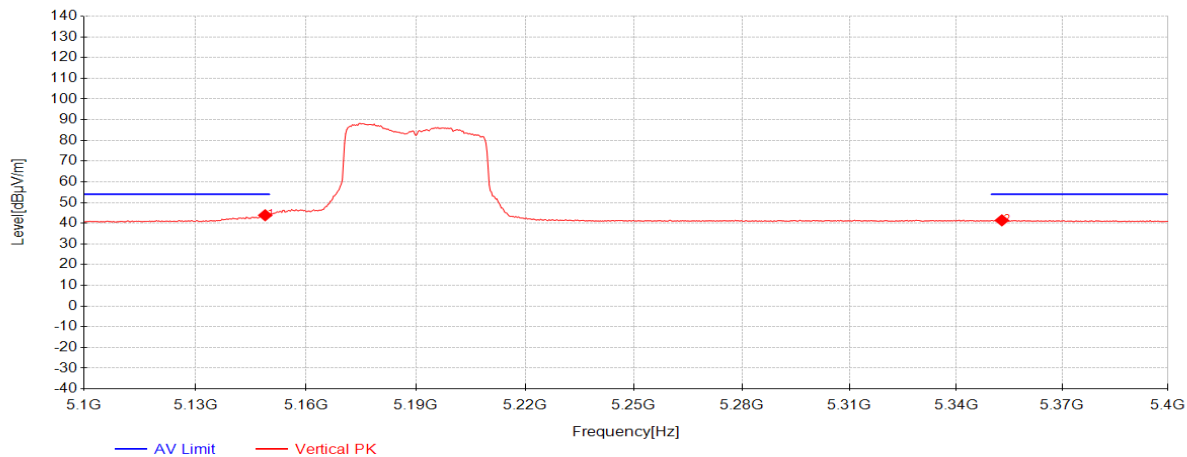

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.9	28.96	33.07	-18.18	43.85	54.00	10.15	Vertical
2	5352.9	26.12	33.03	-17.75	41.40	54.00	12.60	Vertical




040_11be(EHT40)_TX_CH_62_Horizontal_Peak

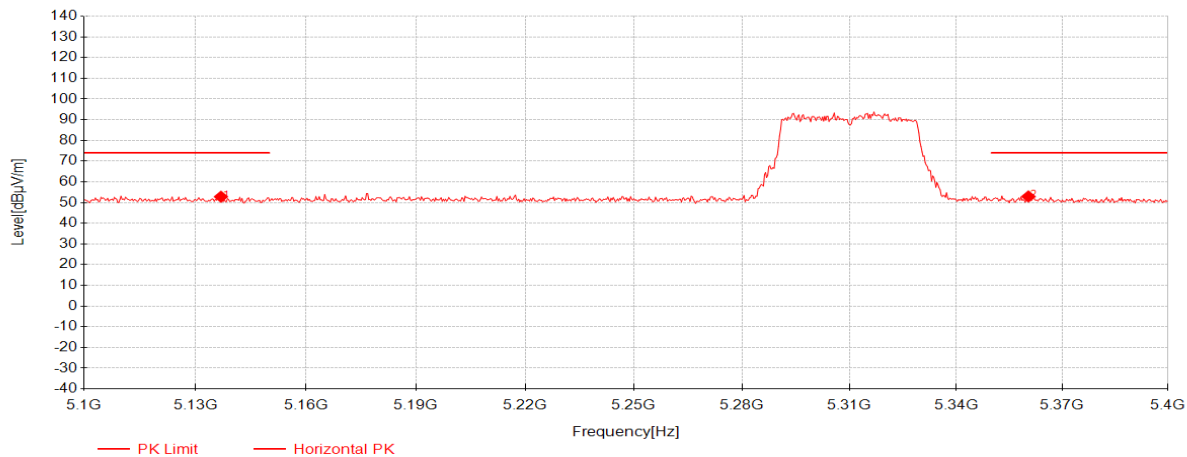

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5136.9	37.97	33.07	-18.22	52.82	74.00	21.18	Horizontal
2	5360.4	37.70	33.03	-17.76	52.96	74.00	21.04	Horizontal




041_11be(EHT40)_TX_CH_62_Horizontal_Average

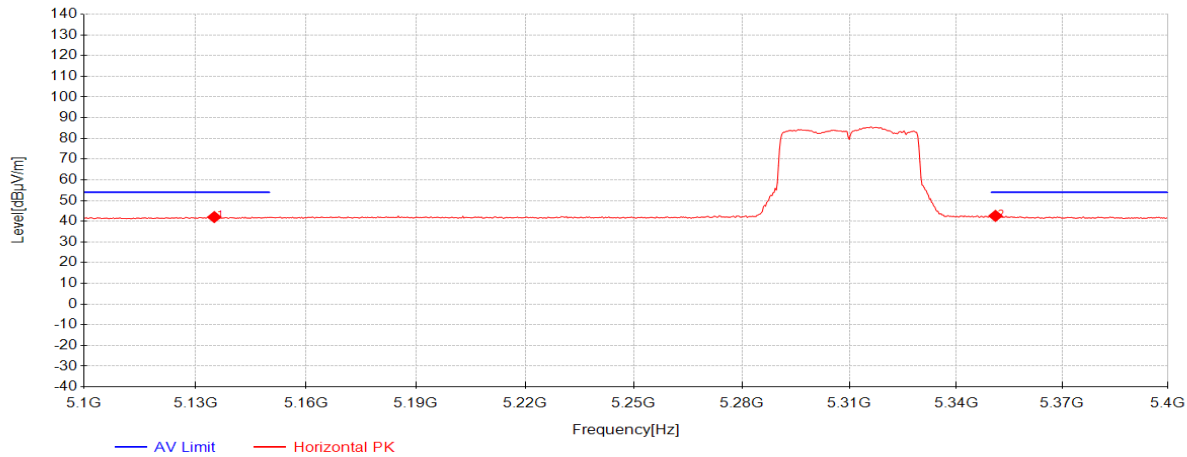

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5135.1	27.18	33.07	-18.22	42.03	54.00	11.97	Horizontal
2	5351.1	27.30	33.03	-17.75	42.58	54.00	11.42	Horizontal




042_11be(EHT40)_TX_CH_62_Vetical_Peak

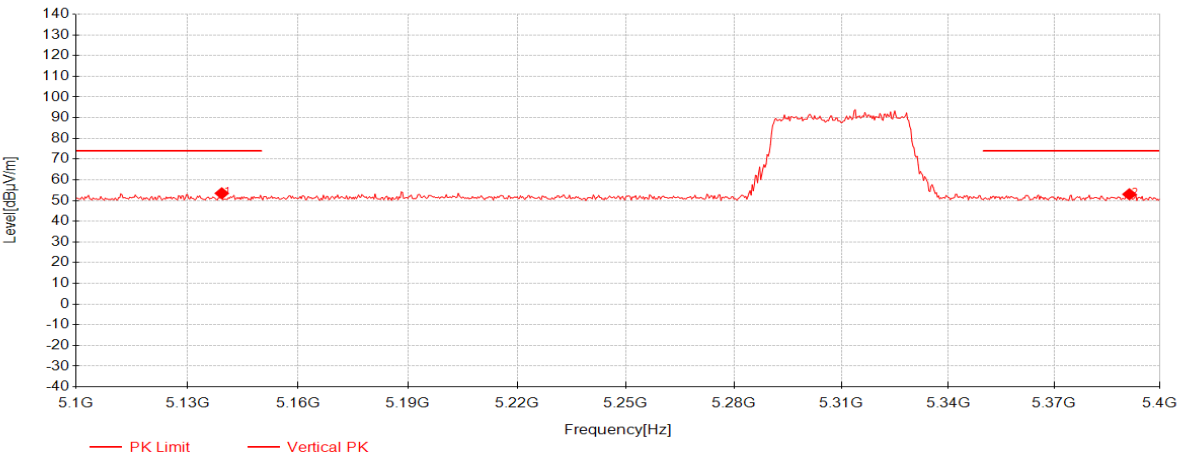

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5139.3	38.62	33.07	-18.21	53.48	74.00	20.52	Vertical
2	5391.3	37.82	33.02	-17.81	53.03	74.00	20.97	Vertical




043_11be(EHT40)_TX_CH_62_Vetical_Average

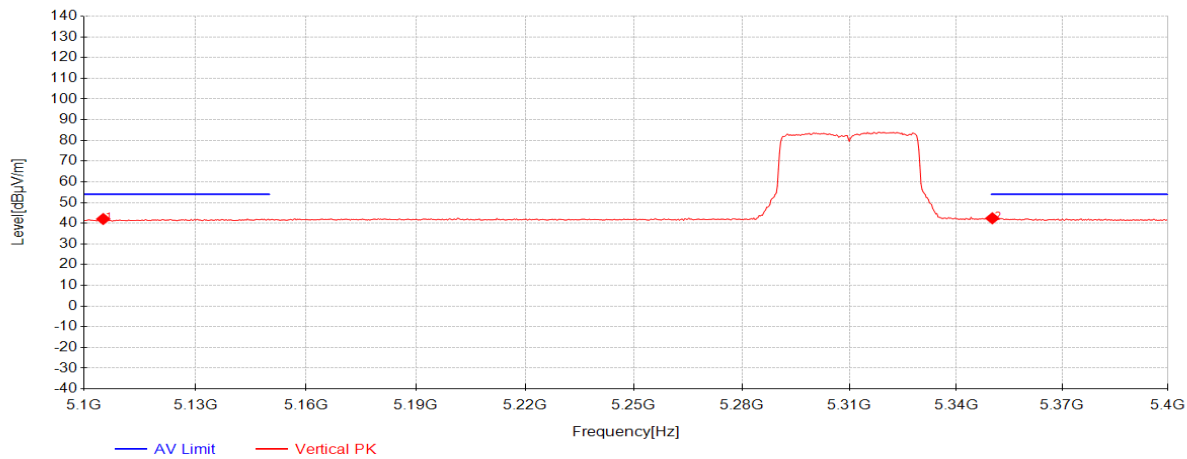


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5105.1	27.28	33.08	-18.31	42.04	54.00	11.96	Vertical
2	5350.2	27.11	33.03	-17.75	42.39	54.00	11.61	Vertical

044_11be(EHT40)_TX_CH_102_Horizontal_Peak

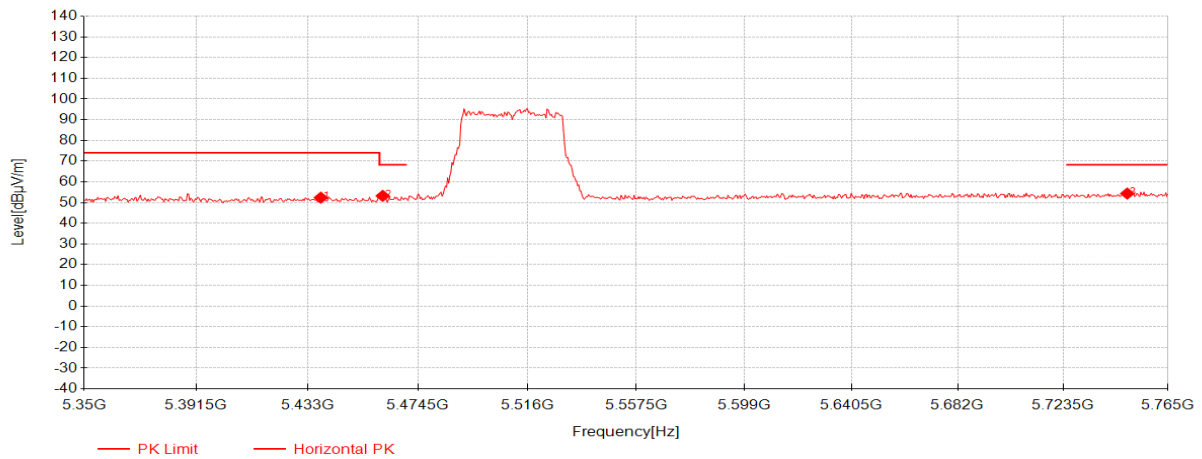


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5437.98	37.06	33.01	-17.71	52.37	74.00	21.63	Horizontal
2	5461.22	37.85	33.01	-17.64	53.22	68.20	14.98	Horizontal
3	5748.815	37.78	33.75	-17.18	54.35	68.20	13.85	Horizontal

045_11be(EHT40)_TX_CH_102_Horizontal_Average

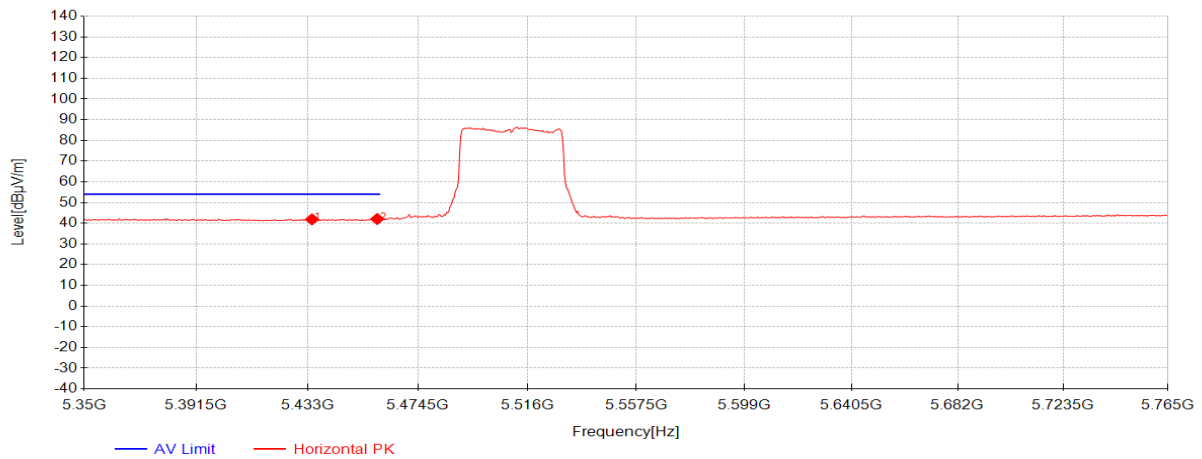

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5434.66	26.57	33.01	-17.72	41.87	54.00	12.13	Horizontal
2	5459.145	26.68	33.01	-17.64	42.05	54.00	11.95	Horizontal


046_11be(EHT40)_TX_CH_102_Vertical_Peak

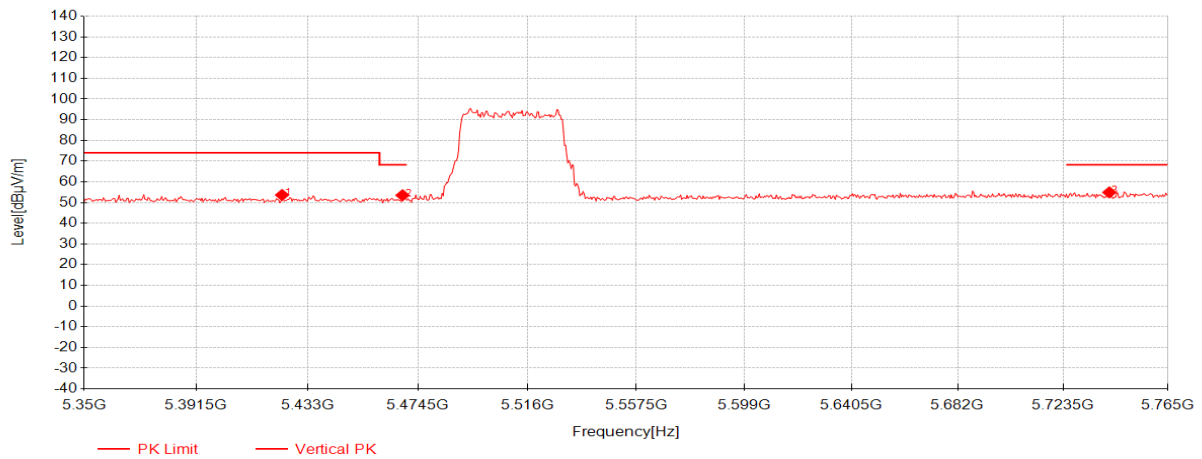

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5423.455	38.38	33.02	-17.75	53.65	74.00	20.35	Vertical
2	5468.69	38.11	33.01	-17.61	53.50	68.20	14.70	Vertical
3	5741.76	38.38	33.73	-17.20	54.90	68.20	13.30	Vertical




047_11be(EHT40)_TX_CH_102_Vertical_Average

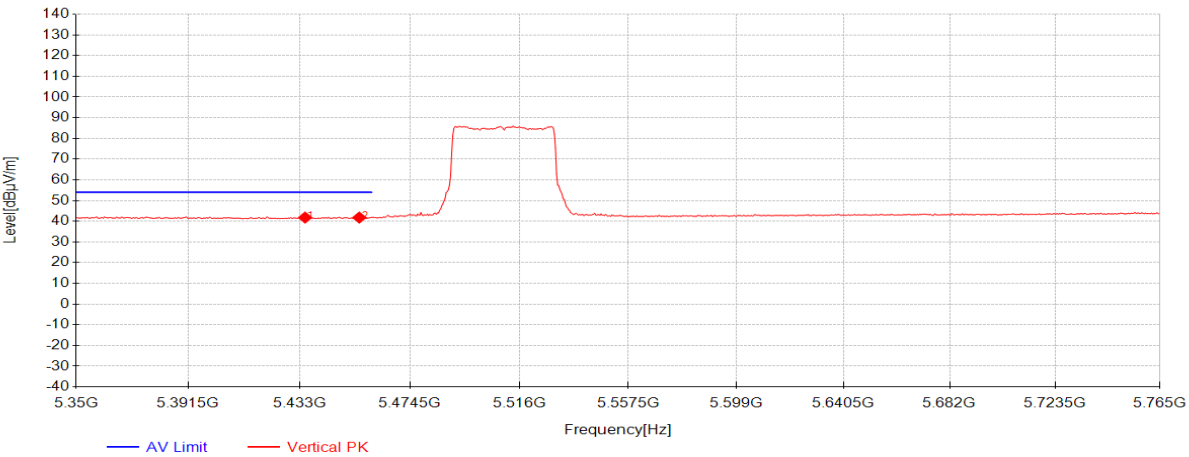

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5435.075	26.48	33.01	-17.71	41.78	54.00	12.22	Vertical
2	5455.41	26.42	33.01	-17.65	41.78	54.00	12.22	Vertical


048_11be(EHT40)_TX_CH_134_Horizontal_Peak

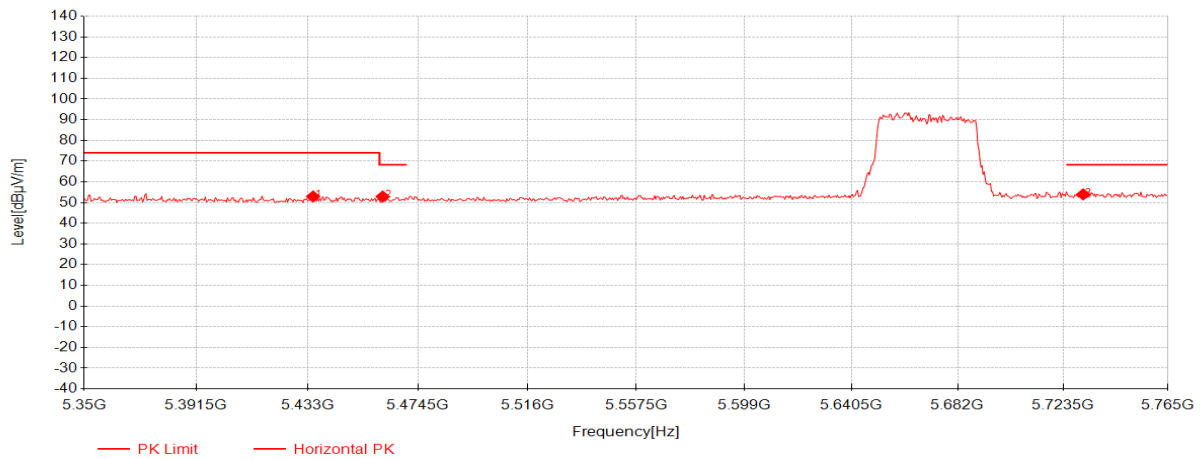

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5435.075	37.63	33.01	-17.71	52.93	74.00	21.07	Horizontal
2	5461.22	37.53	33.01	-17.64	52.90	68.20	15.30	Horizontal
3	5731.385	37.48	33.69	-17.23	53.94	68.20	14.26	Horizontal




049_11be(EHT40)_TX_CH_134_Horizontal_Average

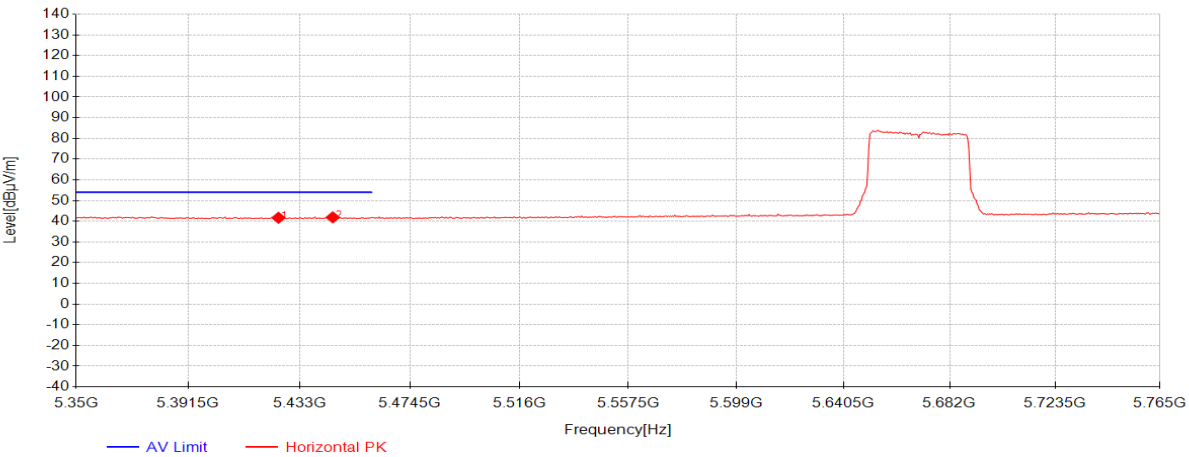

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5425.115	26.40	33.01	-17.74	41.67	54.00	12.33	Horizontal
2	5445.45	26.55	33.01	-17.68	41.88	54.00	12.12	Horizontal


050_11be(EHT40)_TX_CH_134_Veritical_Peak

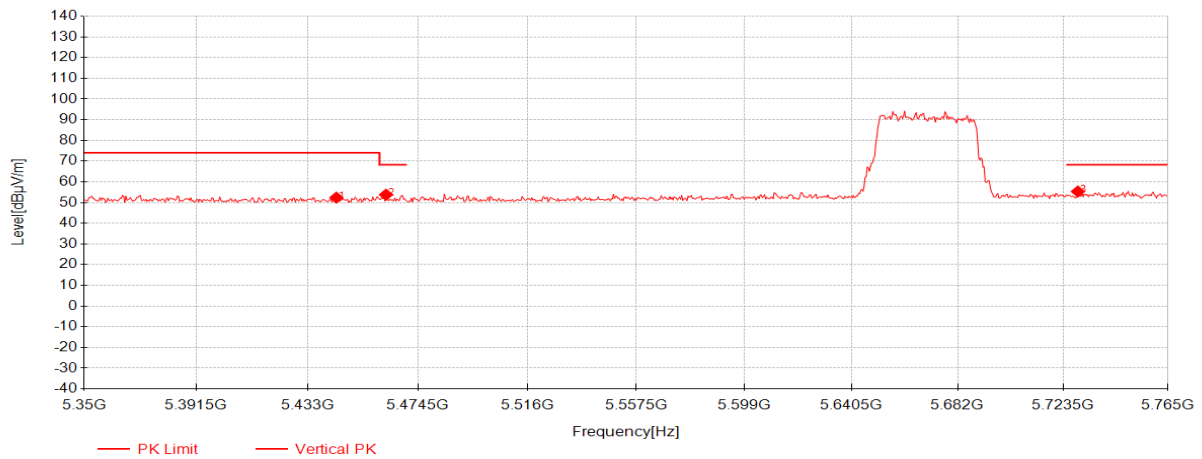

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5443.79	37.04	33.01	-17.69	52.36	74.00	21.64	Vertical
2	5462.465	38.42	33.01	-17.63	53.79	68.20	14.41	Vertical
3	5729.31	38.87	33.69	-17.24	55.32	68.20	12.88	Vertical




051_11be(EHT40)_TX_CH_134_Veritical_Average

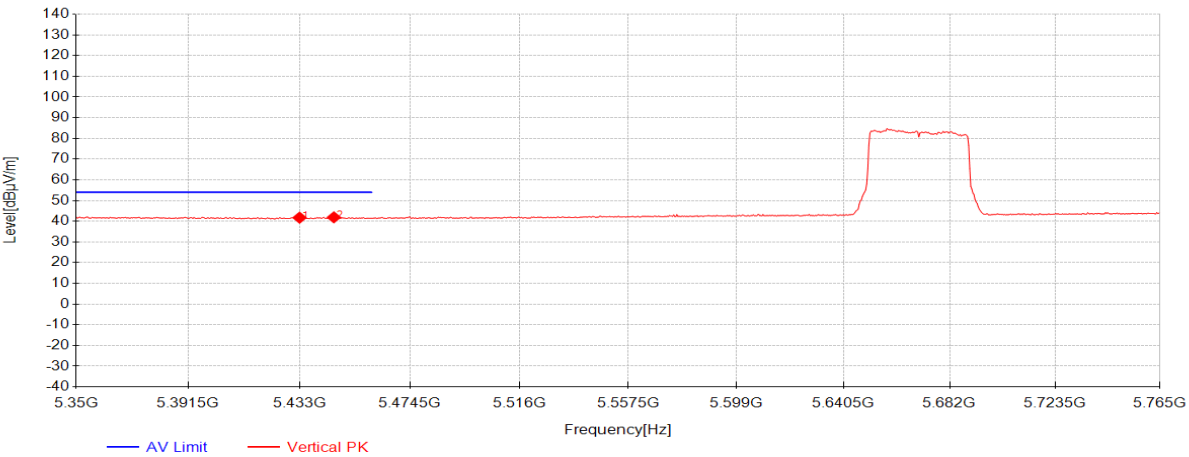


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5433	26.45	33.01	-17.72	41.74	54.00	12.26	Vertical
2	5445.865	26.57	33.01	-17.68	41.90	54.00	12.10	Vertical

052_11be(EHT40)_TX_CH_151_Horizontal_Peak

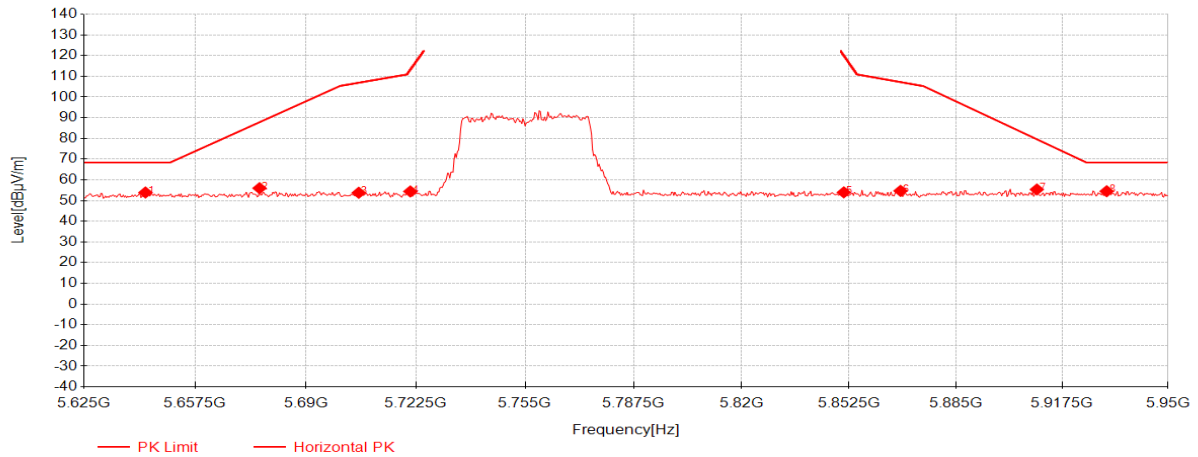


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5642.875	37.74	33.43	-17.27	53.90	68.30	14.40	Horizontal
2	5676.35	39.75	33.53	-17.31	55.97	87.84	31.87	Horizontal
3	5705.6	37.46	33.62	-17.31	53.76	106.87	53.11	Horizontal
4	5720.875	38.01	33.66	-17.27	54.41	112.90	58.49	Horizontal
5	5850.875	36.81	34.05	-16.91	53.95	120.30	66.35	Horizontal
6	5868.1	37.45	34.10	-16.88	54.68	107.23	52.55	Horizontal
7	5909.7	37.97	34.23	-16.84	55.36	79.59	24.23	Horizontal
8	5931.15	37.11	34.29	-16.91	54.50	68.30	13.80	Horizontal

053_11be(EHT40)_TX_CH_151_Vertical_Peak

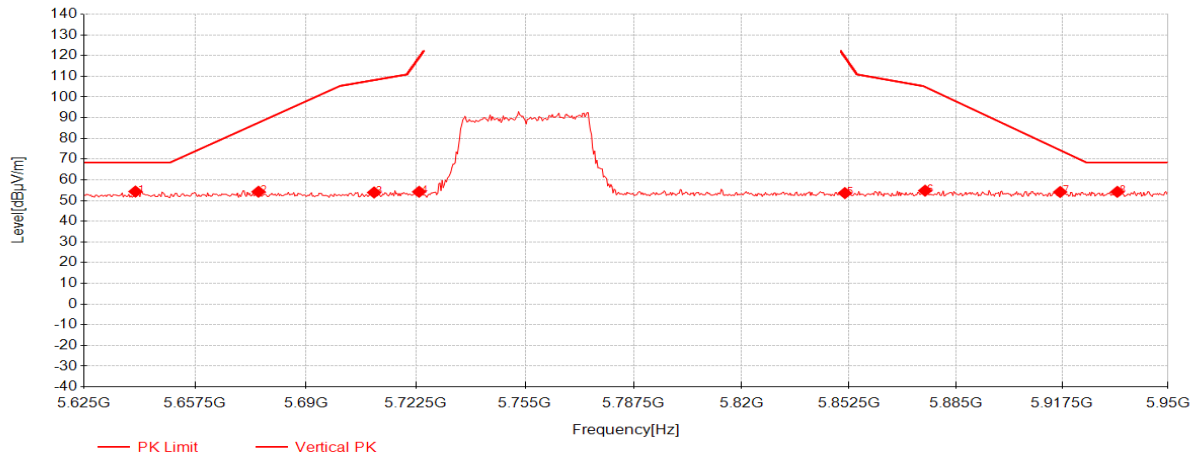


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5639.95	38.19	33.42	-17.27	54.34	68.30	13.96	Vertical
2	5676.025	38.03	33.53	-17.31	54.25	87.60	33.35	Vertical
3	5710.15	37.55	33.63	-17.30	53.88	108.14	54.26	Vertical
4	5723.475	37.83	33.67	-17.26	54.24	118.82	64.58	Vertical
5	5851.2	36.45	34.05	-16.91	53.59	119.56	65.97	Vertical
6	5875.575	37.50	34.13	-16.86	54.77	104.87	50.10	Vertical
7	5916.85	36.75	34.25	-16.86	54.14	74.31	20.17	Vertical
8	5934.4	36.81	34.30	-16.92	54.20	68.30	14.10	Vertical

054_11be(EHT40)_TX_CH_159_Horizontal_Peak

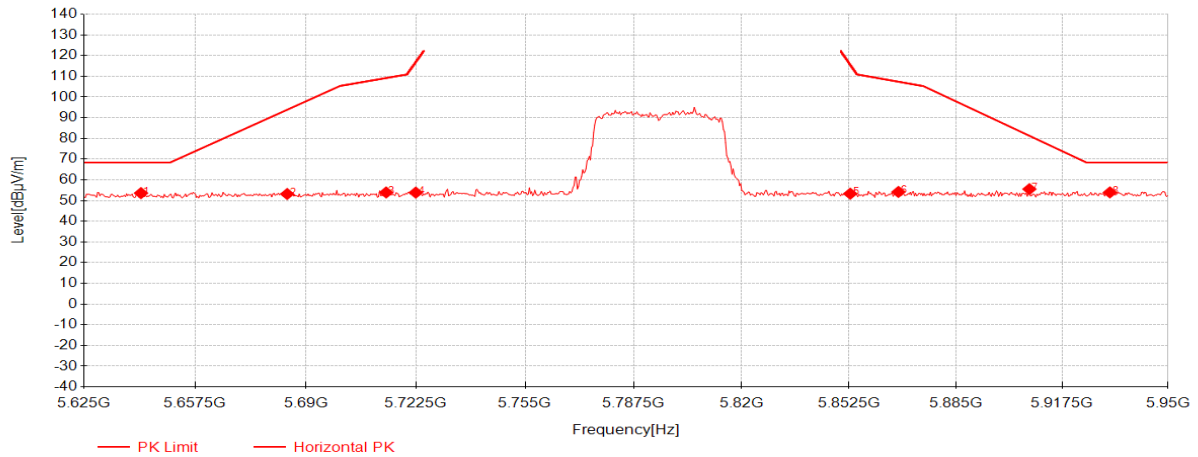


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5641.575	37.44	33.42	-17.27	53.59	68.30	14.71	Horizontal
2	5684.475	36.93	33.55	-17.31	53.17	93.85	40.68	Horizontal
3	5713.725	37.55	33.64	-17.29	53.90	109.15	55.25	Horizontal
4	5722.5	37.43	33.67	-17.26	53.84	116.60	62.76	Horizontal
5	5852.825	36.15	34.06	-16.91	53.30	115.86	62.56	Horizontal
6	5867.45	36.94	34.10	-16.88	54.16	107.41	53.25	Horizontal
7	5907.425	38.12	34.22	-16.83	55.51	81.27	25.76	Horizontal
8	5932.125	36.54	34.30	-16.91	53.93	68.30	14.37	Horizontal

055_11be(EHT40)_TX_CH_159_Vertical_Peak

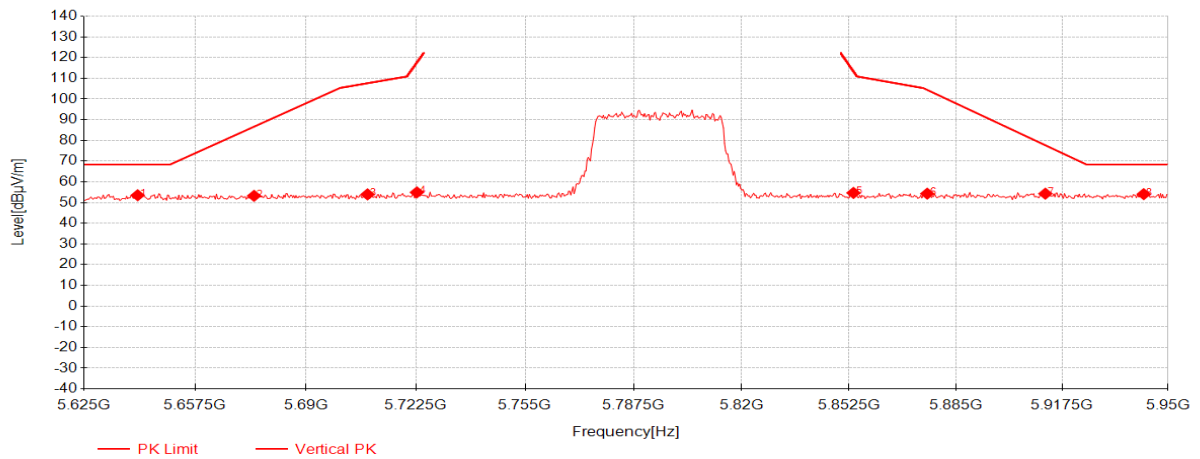


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5640.6	37.38	33.42	-17.27	53.53	68.30	14.77	Vertical
2	5674.725	37.02	33.52	-17.30	53.24	86.64	33.40	Vertical
3	5708.2	37.63	33.62	-17.30	53.95	107.60	53.65	Vertical
4	5722.825	38.51	33.67	-17.26	54.92	117.34	62.42	Vertical
5	5853.8	37.49	34.06	-16.91	54.64	113.64	59.00	Vertical
6	5876.225	37.03	34.13	-16.86	54.30	104.39	50.09	Vertical
7	5912.3	36.90	34.24	-16.85	54.29	77.67	23.38	Vertical
8	5942.525	36.66	34.33	-16.94	54.05	68.30	14.25	Vertical

056_11be(EHT80)_TX_CH_42_Horizontal_Peak

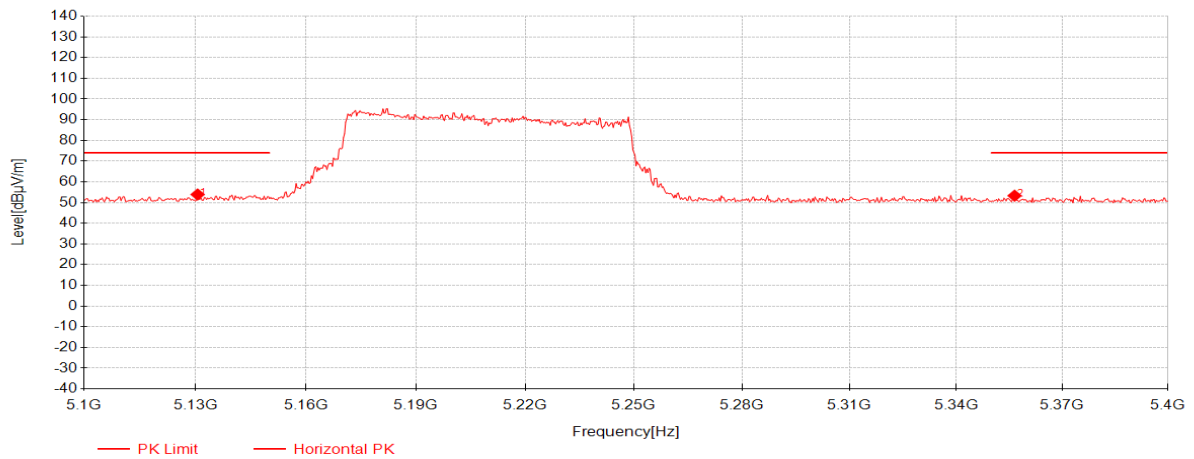


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5130.6	39.05	33.07	-18.24	53.89	74.00	20.11	Horizontal
2	5356.5	38.03	33.03	-17.76	53.30	74.00	20.70	Horizontal

057_11be(EHT80)_TX_CH_42_Horizontal_Average

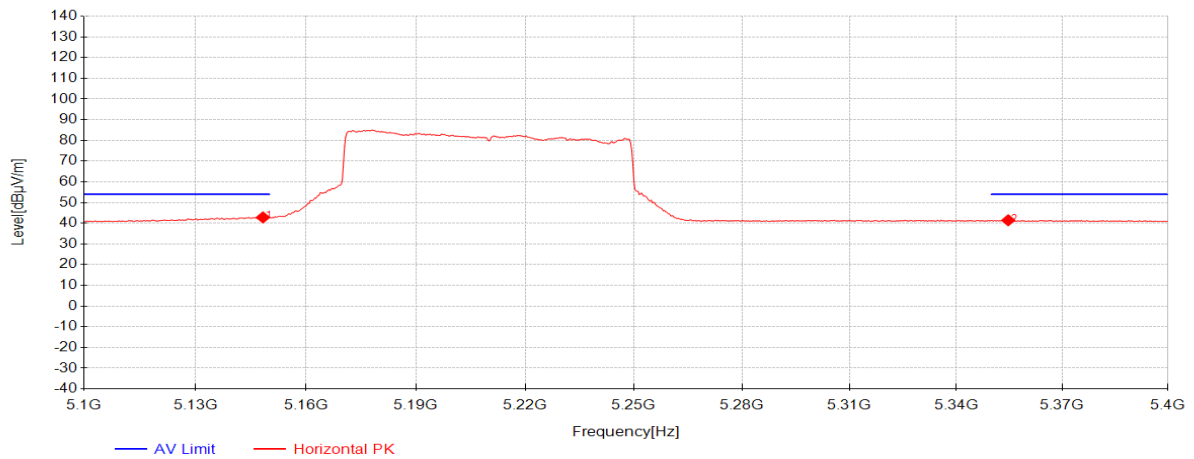

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.3	27.93	33.07	-18.19	42.82	54.00	11.18	Horizontal
2	5354.7	26.16	33.03	-17.76	41.43	54.00	12.57	Horizontal


058_11be(EHT80)_TX_CH_42_Veritical_Peak

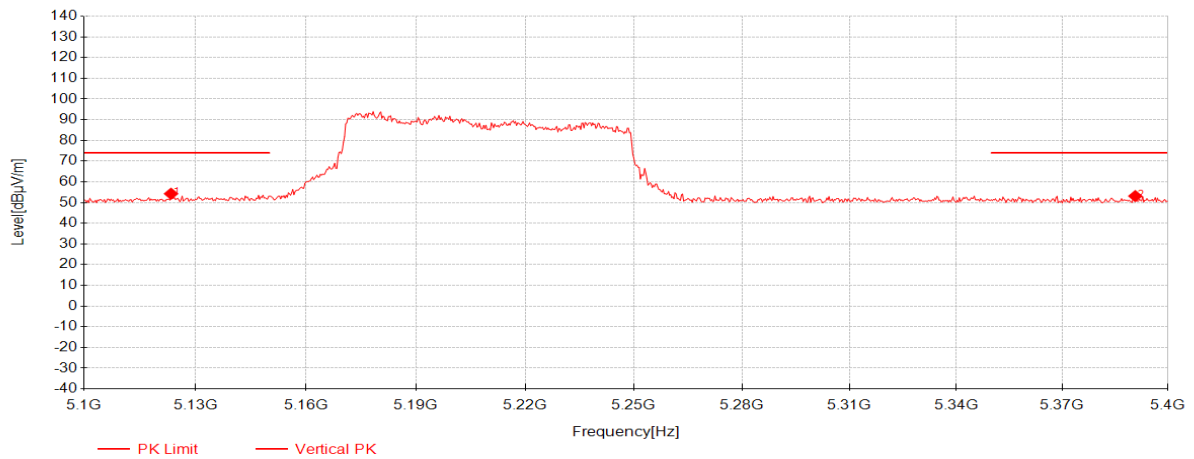

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5123.4	39.42	33.08	-18.26	54.24	74.00	19.76	Vertical
2	5390.7	37.91	33.02	-17.81	53.12	74.00	20.88	Vertical




059_11be(EHT80)_TX_CH_42_Vetical_Average

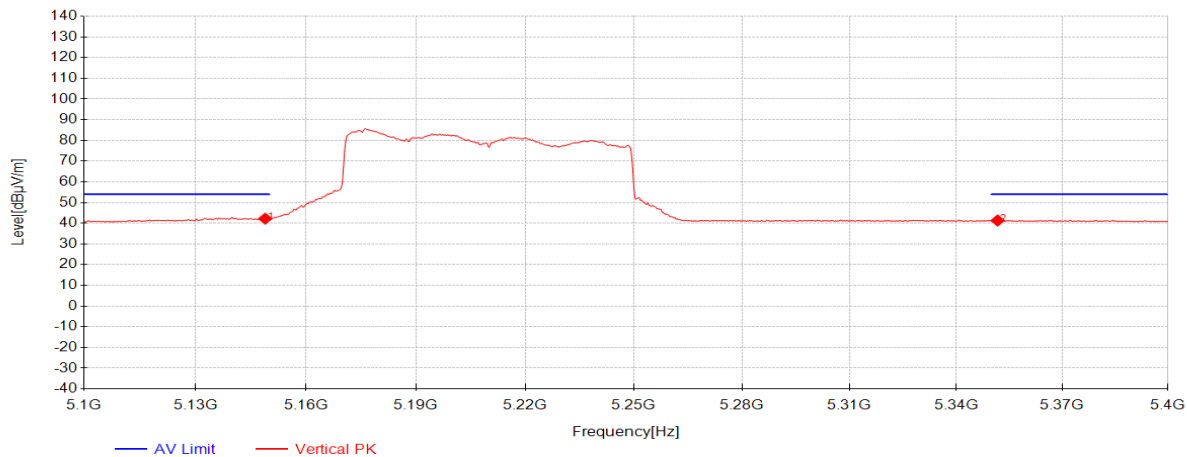

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.9	27.31	33.07	-18.18	42.20	54.00	11.80	Vertical
2	5351.7	26.04	33.03	-17.75	41.32	54.00	12.68	Vertical




060_11be(EHT80)_TX_CH_58_Horizontal_Peak

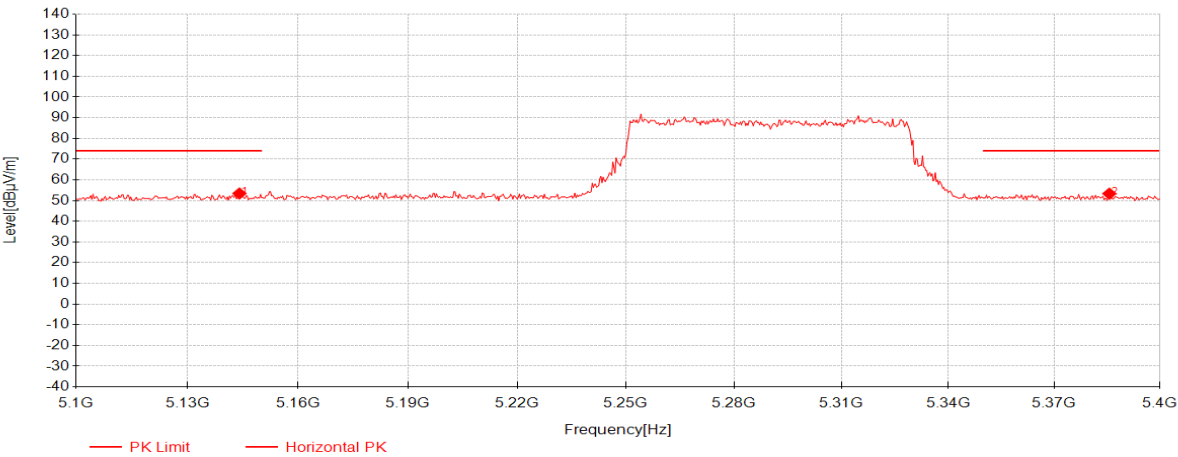

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5144.1	38.54	33.07	-18.20	53.41	74.00	20.59	Horizontal
2	5385.6	38.10	33.02	-17.80	53.32	74.00	20.68	Horizontal




061_11be(EHT80)_TX_CH_58_Horizontal_Average

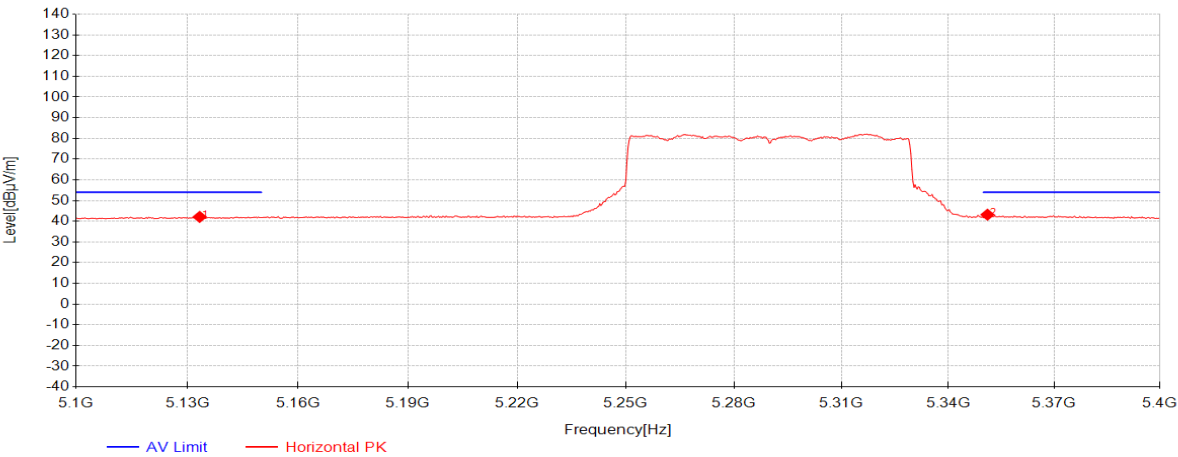

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5133.3	27.25	33.07	-18.23	42.09	54.00	11.91	Horizontal
2	5351.1	27.90	33.03	-17.75	43.18	54.00	10.82	Horizontal




062_11be(EHT80)_TX_CH_58_Vetical_Peak

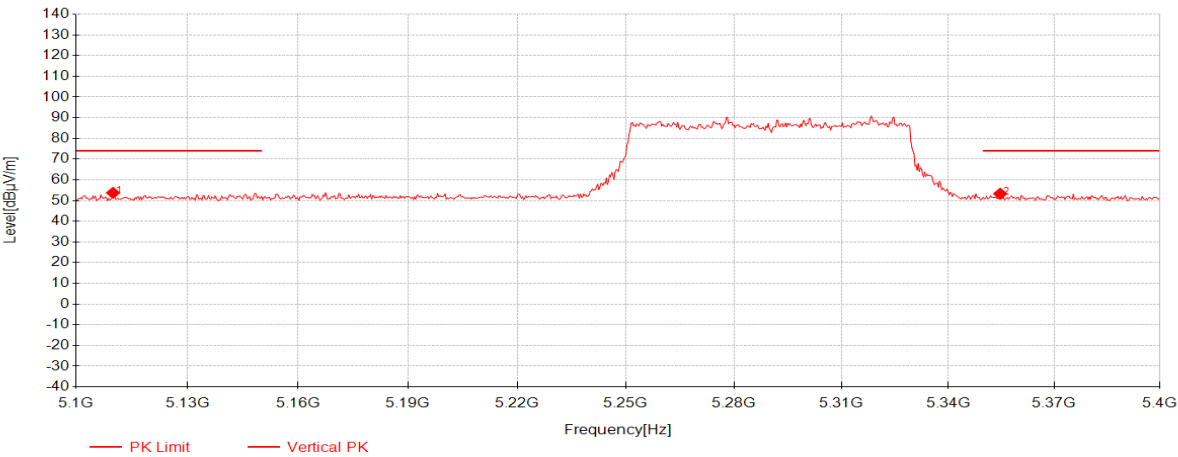

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5109.9	38.94	33.08	-18.30	53.72	74.00	20.28	Vertical
2	5354.7	38.01	33.03	-17.76	53.28	74.00	20.72	Vertical




063_11be(EHT80)_TX_CH_58_Vetical_Average

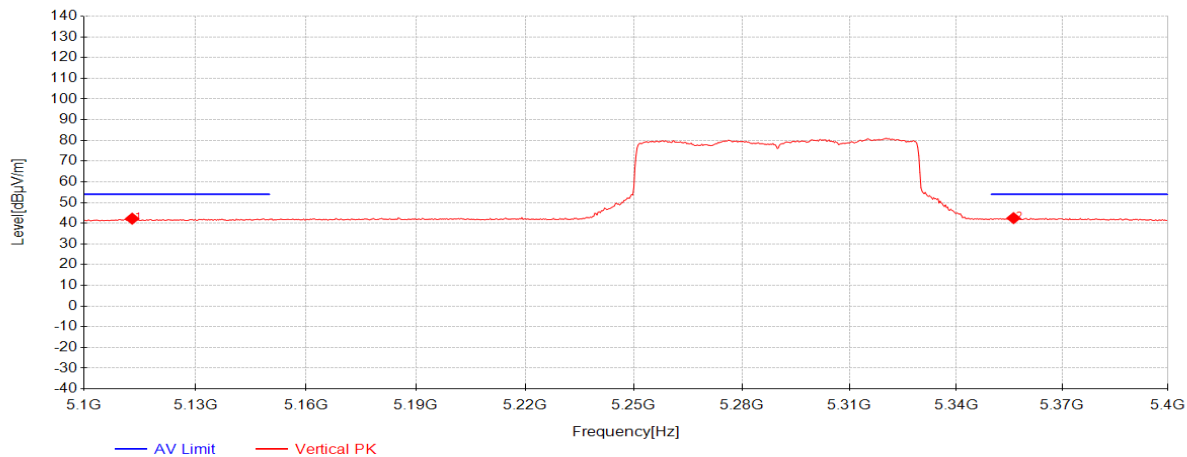


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5112.9	27.42	33.08	-18.29	42.21	54.00	11.79	Vertical
2	5356.2	27.20	33.03	-17.76	42.47	54.00	11.53	Vertical

064_11be(EHT80)_TX_CH_106_Horizontal_Peak

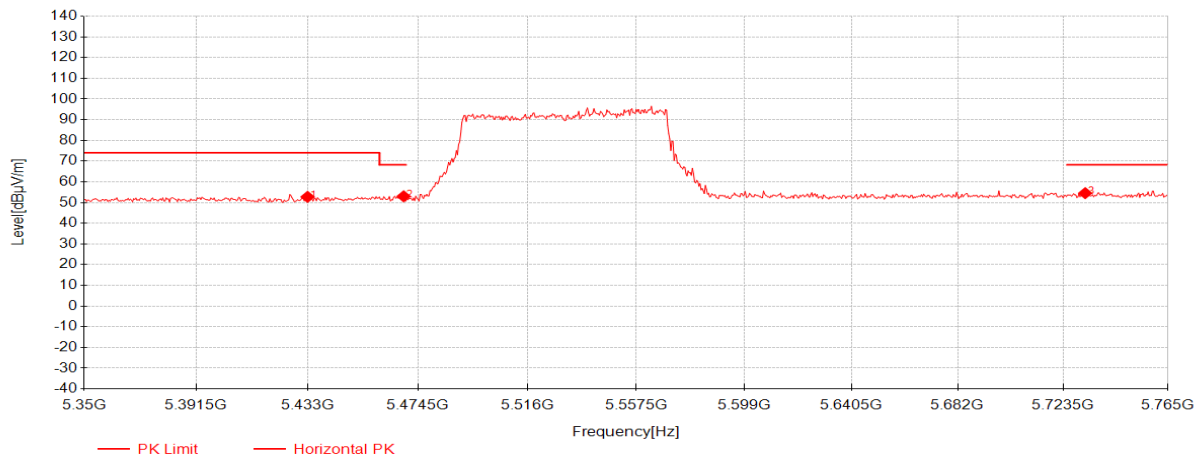


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5433	37.45	33.01	-17.72	52.74	74.00	21.26	Horizontal
2	5469.105	37.62	33.01	-17.61	53.01	68.20	15.19	Horizontal
3	5732.215	38.07	33.70	-17.23	54.54	68.20	13.66	Horizontal

065_11be(EHT80)_TX_CH_106_Horizontal_Average

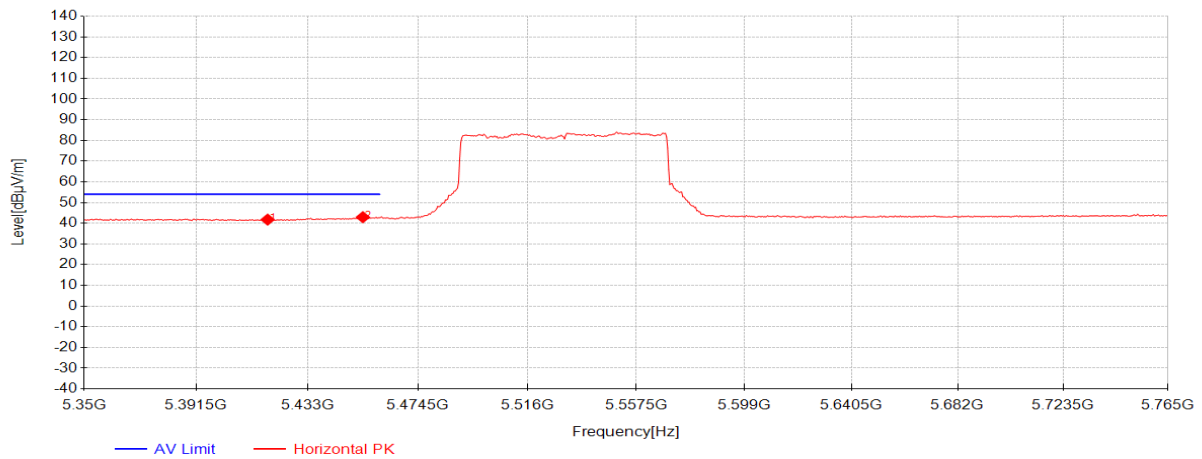

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5418.06	26.50	33.02	-17.77	41.75	54.00	12.25	Horizontal
2	5453.75	27.58	33.01	-17.66	42.93	54.00	11.07	Horizontal


066_11be(EHT80)_TX_CH_106_Veritical_Peak

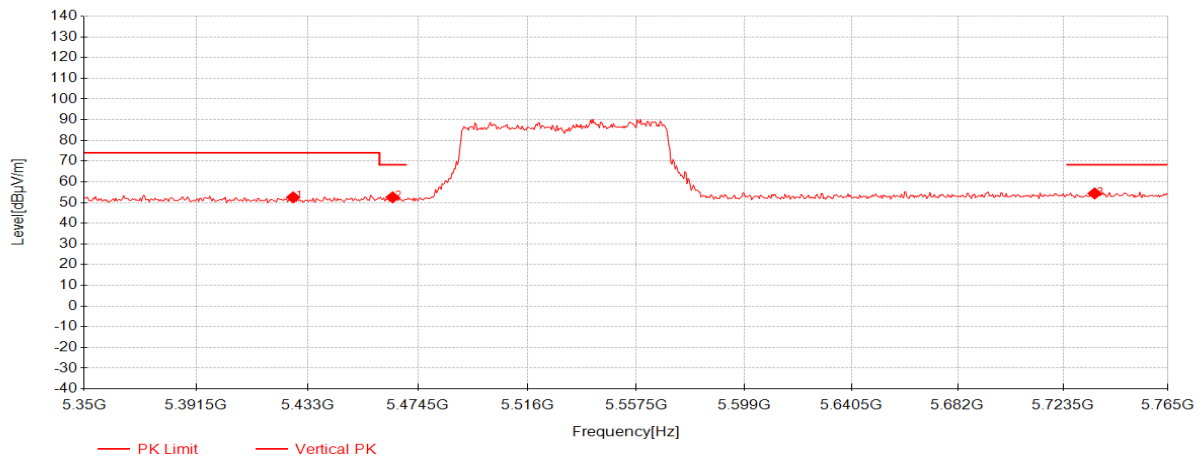

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5427.605	37.23	33.01	-17.74	52.51	74.00	21.49	Vertical
2	5464.955	37.15	33.01	-17.63	52.53	68.20	15.67	Vertical
3	5735.95	37.91	33.71	-17.22	54.40	68.20	13.80	Vertical




067_11be(EHT80)_TX_CH_106_Veritical_Average

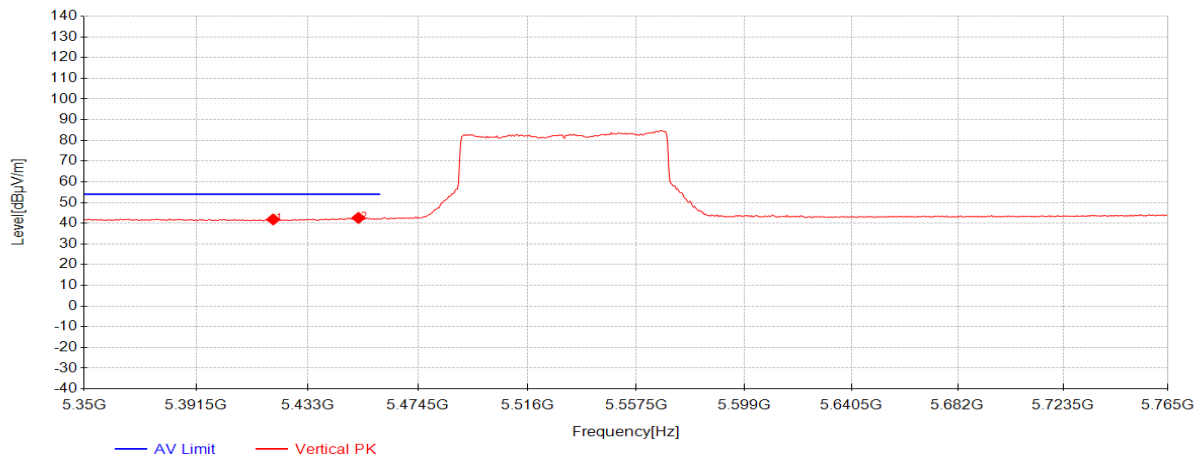


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5420.135	26.58	33.02	-17.76	41.84	54.00	12.16	Vertical
2	5452.09	27.23	33.01	-17.66	42.58	54.00	11.42	Vertical

068_11be(EHT80)_TX_CH_155_Horizontal_Peak

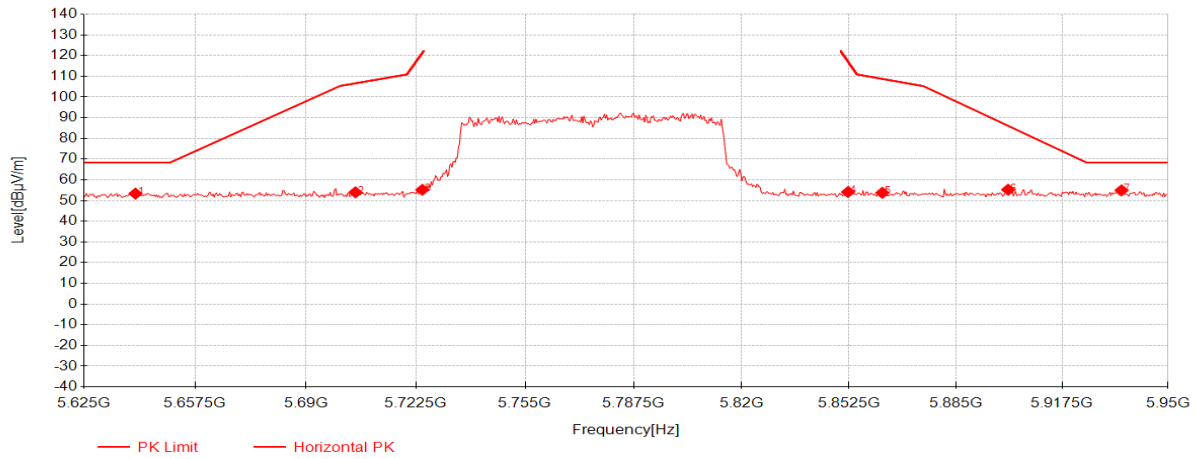


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5639.95	37.22	33.42	-17.27	53.37	68.30	14.93	Horizontal
2	5704.625	37.67	33.61	-17.32	53.97	106.60	52.63	Horizontal
3	5724.45	38.77	33.67	-17.25	55.19	121.05	65.86	Horizontal
4	5852.175	37.00	34.06	-16.91	54.15	117.34	63.19	Horizontal
5	5862.575	36.54	34.09	-16.89	53.74	108.78	55.04	Horizontal
6	5900.925	37.86	34.20	-16.81	55.25	86.08	30.83	Horizontal
7	5935.7	37.55	34.31	-16.92	54.94	68.30	13.36	Horizontal

069_11be(EHT80)_TX_CH_155_Veritical_Peak

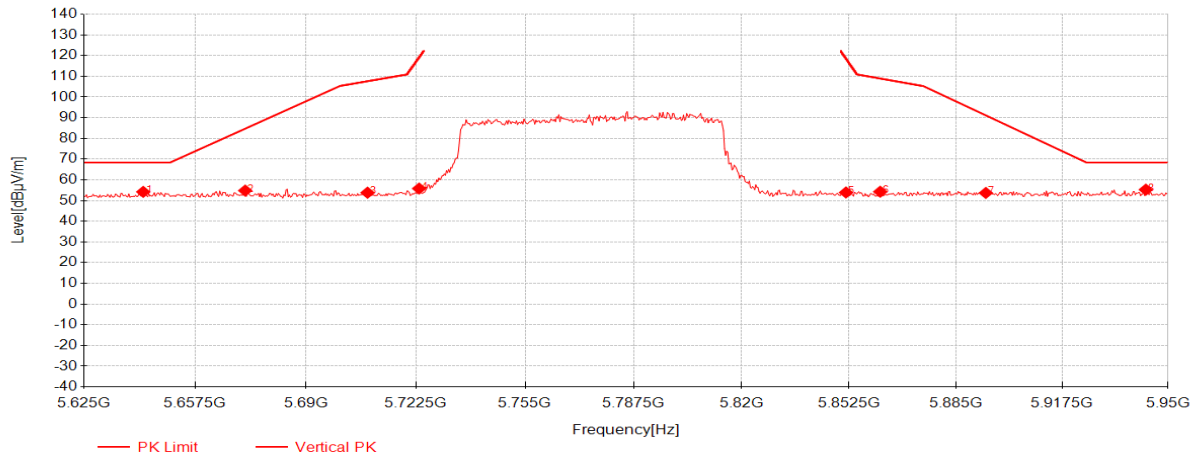


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5642.225	38.05	33.43	-17.27	54.20	68.30	14.10	Vertical
2	5672.125	38.61	33.52	-17.30	54.82	84.71	29.89	Vertical
3	5708.2	37.48	33.62	-17.30	53.80	107.60	53.80	Vertical
4	5723.475	39.39	33.67	-17.26	55.80	118.82	63.02	Vertical
5	5851.525	36.77	34.05	-16.91	53.91	118.82	64.91	Vertical
6	5861.925	37.05	34.09	-16.89	54.25	108.96	54.71	Vertical
7	5894.1	36.32	34.18	-16.82	53.68	91.13	37.45	Vertical
8	5943.175	37.87	34.33	-16.94	55.26	68.30	13.04	Vertical

070_11be(EHT160)_TX_CH_50_Horizontal_Peak

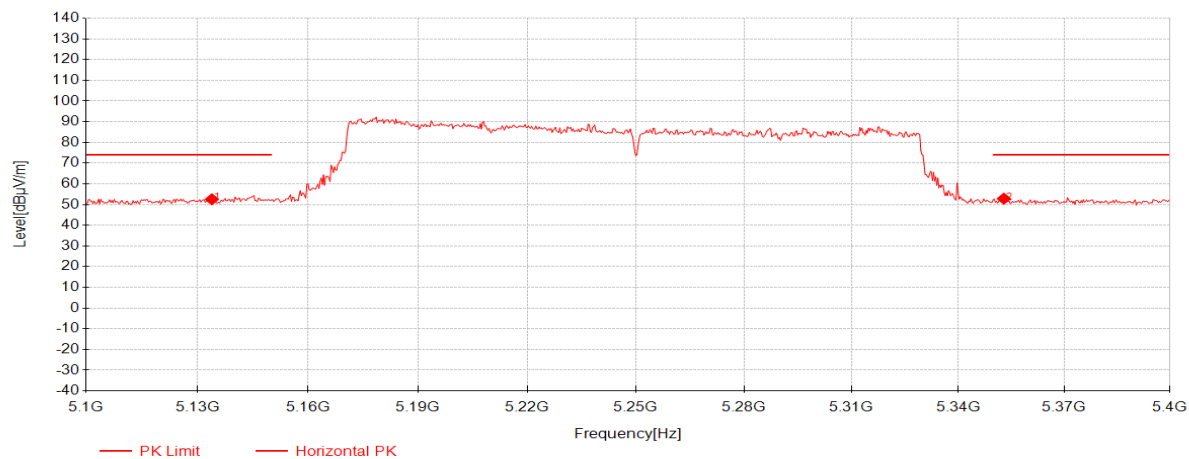


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5133.9	37.70	33.07	-18.23	52.54	74.00	21.46	Horizontal
2	5352.9	37.55	33.03	-17.75	52.83	74.00	21.17	Horizontal

071_11be(EHT160)_TX_CH_50_Horizontal_Average

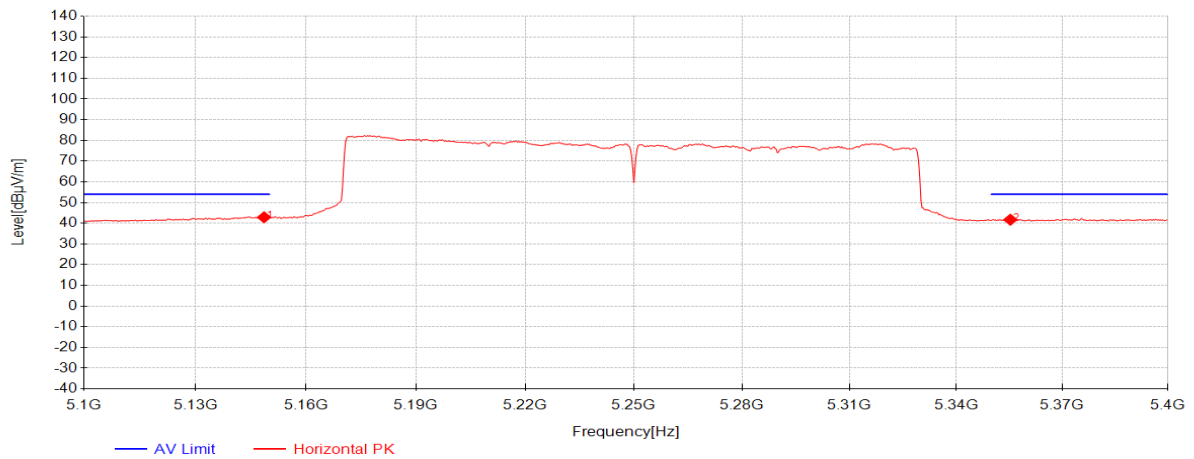


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.6	28.00	33.07	-18.18	42.89	54.00	11.11	Horizontal
2	5355.3	26.44	33.03	-17.76	41.71	54.00	12.29	Horizontal

072_11be(EHT160)_TX_CH_50_Vertical_Peak

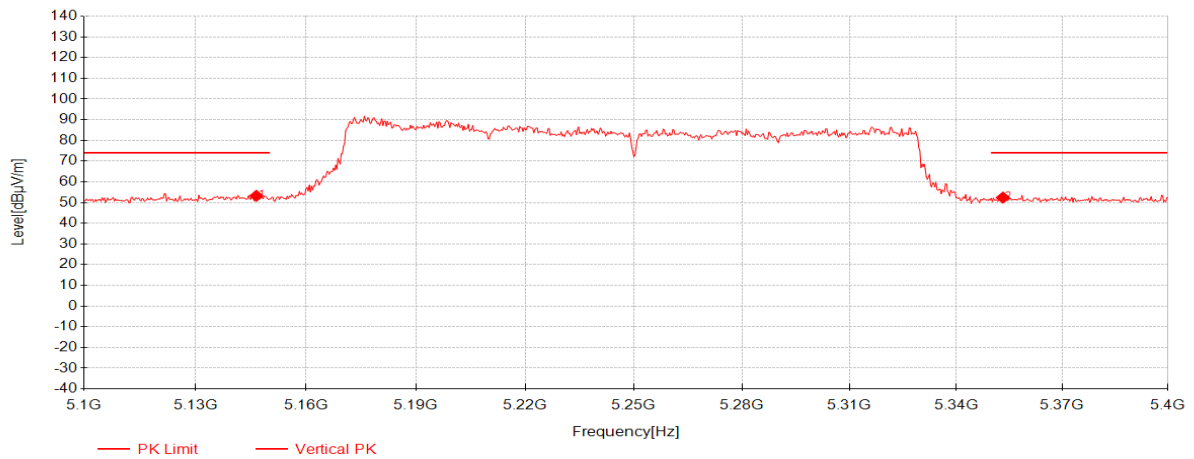


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5146.5	38.36	33.07	-18.19	53.24	74.00	20.76	Vertical
2	5353.2	37.14	33.03	-17.75	52.41	74.00	21.59	Vertical

073_11be(EHT160)_TX_CH_50_Veritical_Average

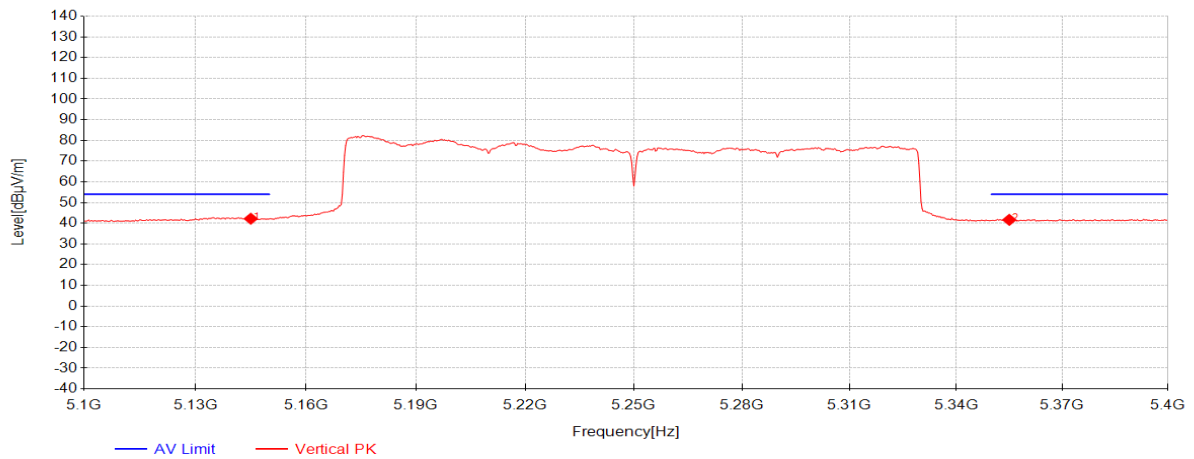

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5145	27.30	33.07	-18.20	42.18	54.00	11.82	Vertical
2	5355	26.37	33.03	-17.76	41.64	54.00	12.36	Vertical


074_11be(EHT160)_TX_CH_114_Horizontal_Peak

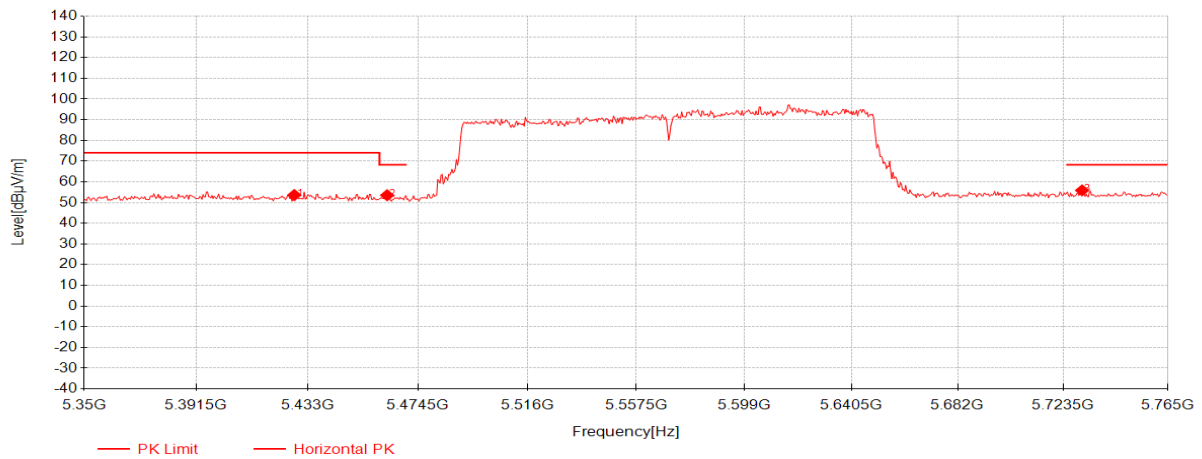

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5428.02	38.34	33.01	-17.74	53.62	74.00	20.38	Horizontal
2	5462.88	38.14	33.01	-17.63	53.52	68.20	14.68	Horizontal
3	5730.97	39.42	33.69	-17.23	55.88	68.20	12.32	Horizontal




075_11be(EHT160)_TX_CH_114_Horizontal_Average

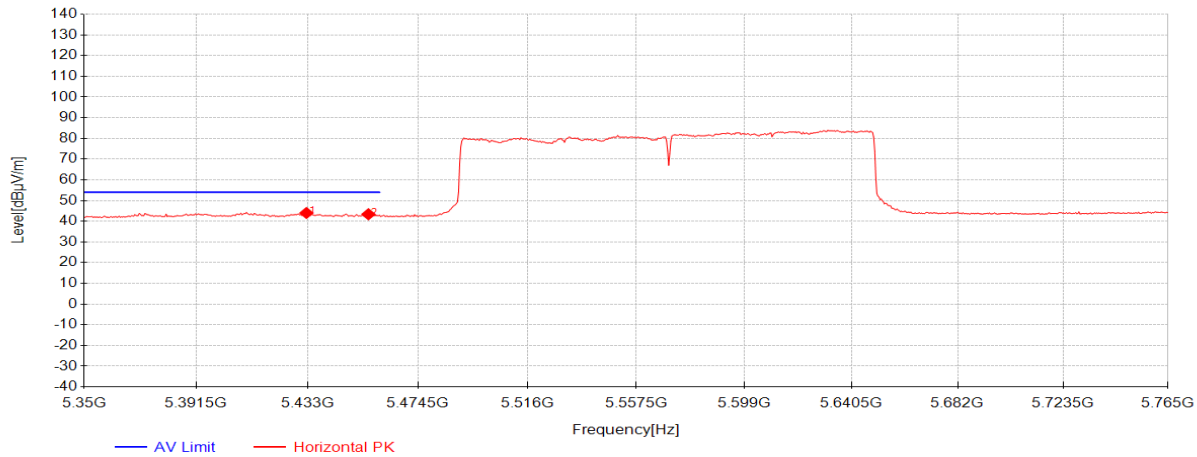


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5432.585	28.70	33.01	-17.72	43.99	54.00	10.01	Horizontal
2	5455.825	28.02	33.01	-17.65	43.38	54.00	10.62	Horizontal

076_11be(EHT160)_TX_CH_114_Veritical_Peak

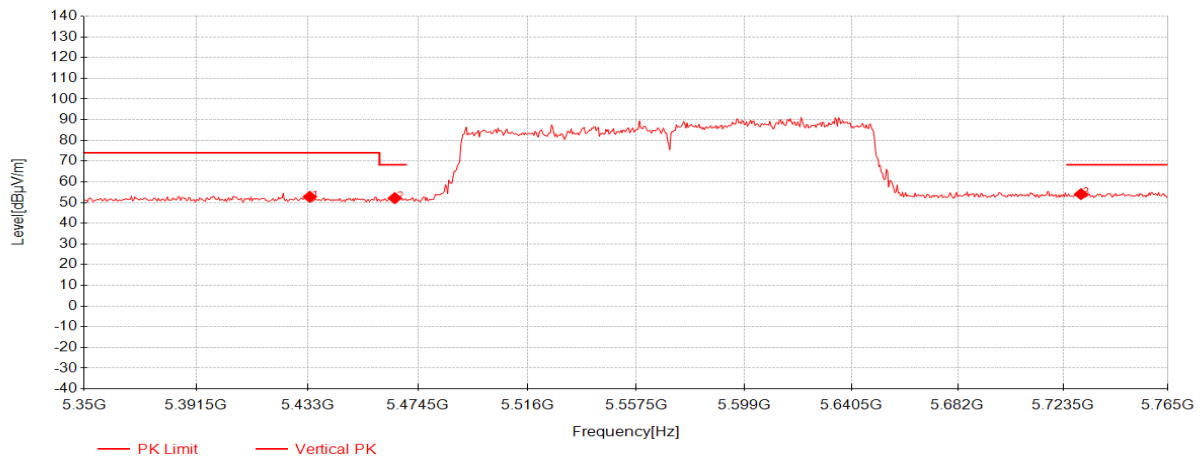


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5433.83	37.50	33.01	-17.72	52.79	74.00	21.21	Vertical
2	5465.785	36.76	33.01	-17.62	52.14	68.20	16.06	Vertical
3	5730.555	37.63	33.69	-17.24	54.09	68.20	14.11	Vertical

077_11be(EHT160)_TX_CH_114_Vertical_Average

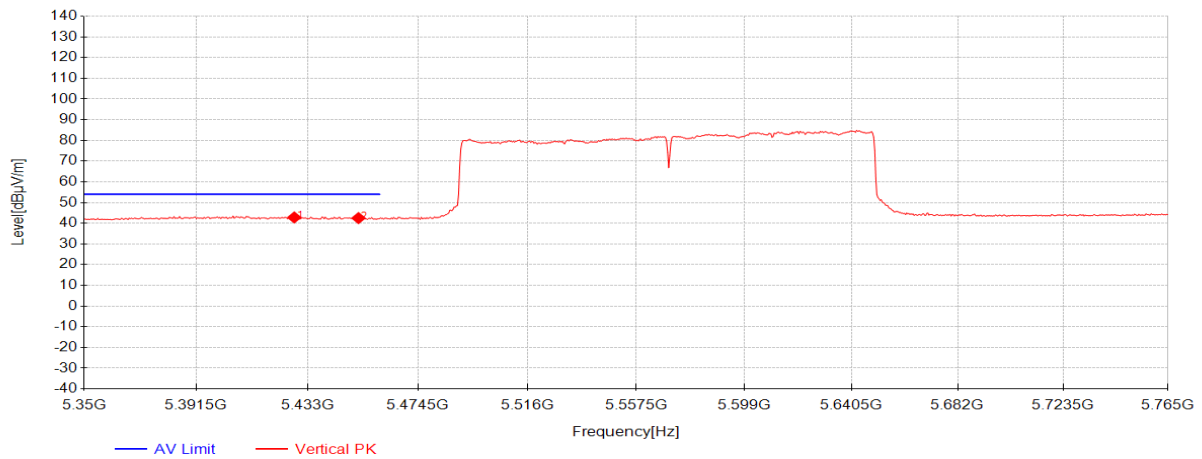

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5428.02	27.53	33.01	-17.74	42.81	54.00	11.19	Vertical
2	5452.09	27.14	33.01	-17.66	42.49	54.00	11.51	Vertical


11be(EHT20)_MRU_Small_Left_RU_(52+26)_TX_CH_36_Horizontal_Peak

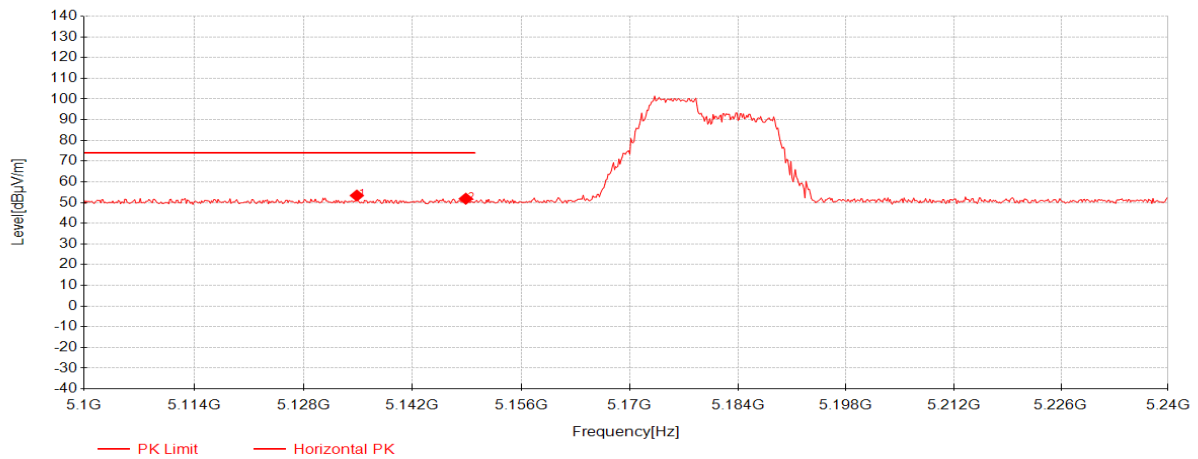

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5134.86	38.54	33.07	-18.23	53.39	74.00	20.61	Horizontal
2	5148.86	36.95	33.07	-18.18	51.84	74.00	22.16	Horizontal




11be(EHT20)_MRU_Small_Left_RU_(52+26)_TX_CH_36_Horizontal_Average

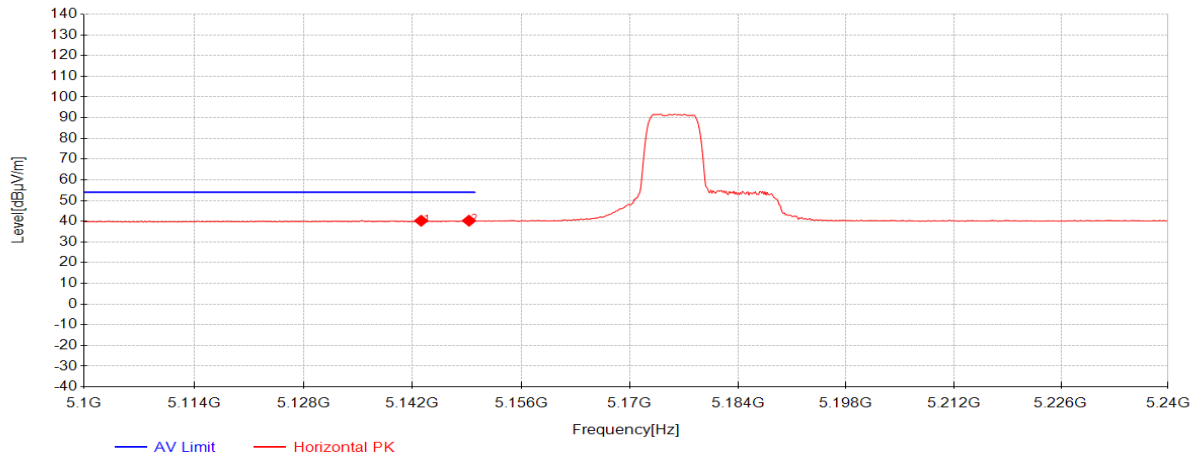

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5143.12	25.36	33.07	-18.20	40.23	54.00	13.77	Horizontal
2	5149.28	25.37	33.07	-18.18	40.26	54.00	13.74	Horizontal


11be(EHT20)_MRU_Small_Left_RU_(52+26)_TX_CH_36_Vertical_Peak

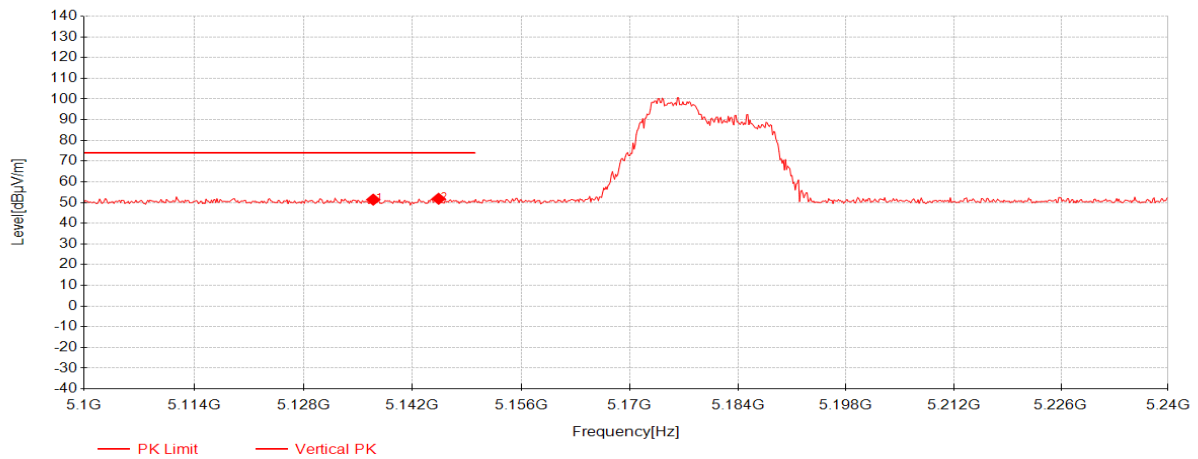

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5136.96	36.54	33.07	-18.22	51.39	74.00	22.61	Vertical
2	5145.36	36.95	33.07	-18.19	51.83	74.00	22.17	Vertical




11be(EHT20)_MRU_Small_Left_RU_(52+26)_TX_CH_36_Vetical_Average

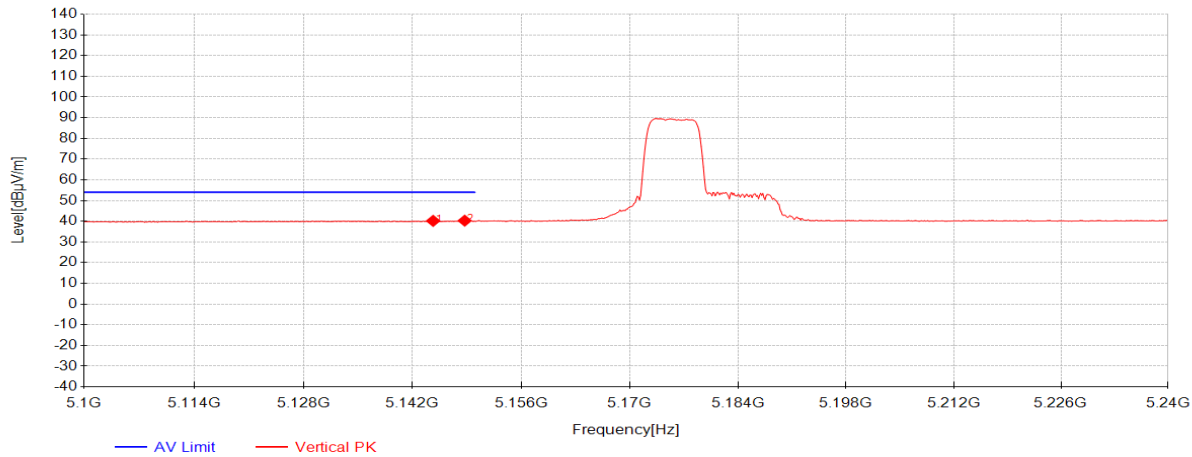

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5144.66	25.30	33.07	-18.20	40.18	54.00	13.82	Vertical
2	5148.72	25.38	33.07	-18.18	40.27	54.00	13.73	Vertical




11be(EHT20)_MRU_Small_Right_RU_(52+26)_TX_CH_64_Horizontal_Peak

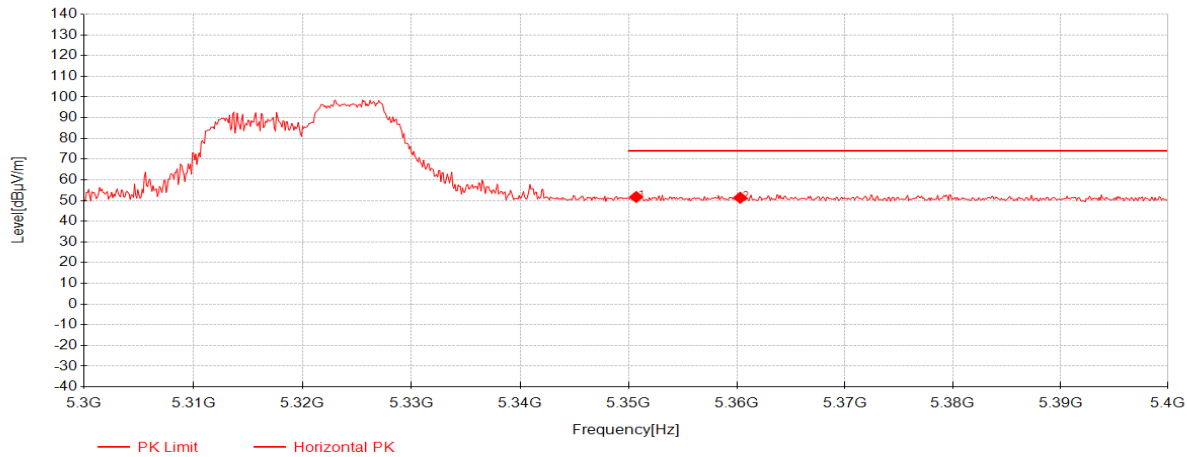

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.7	36.46	33.03	-17.75	51.74	74.00	22.26	Horizontal
2	5360.3	36.08	33.03	-17.76	51.34	74.00	22.66	Horizontal




11be(EHT20)_MRU_Small_Right_RU_(52+26)_TX_CH_64_Horizontal_Average

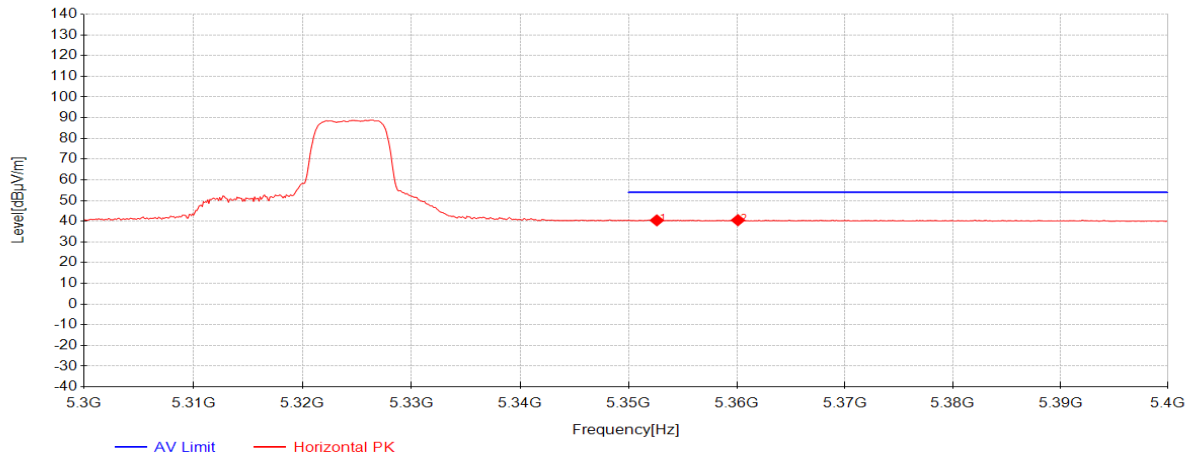

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5352.6	25.15	33.03	-17.75	40.43	54.00	13.57	Horizontal
2	5360.1	25.25	33.03	-17.76	40.51	54.00	13.49	Horizontal




11be(EHT20)_MRU_Small_Right_RU_(52+26)_TX_CH_64_Veritical_Peak

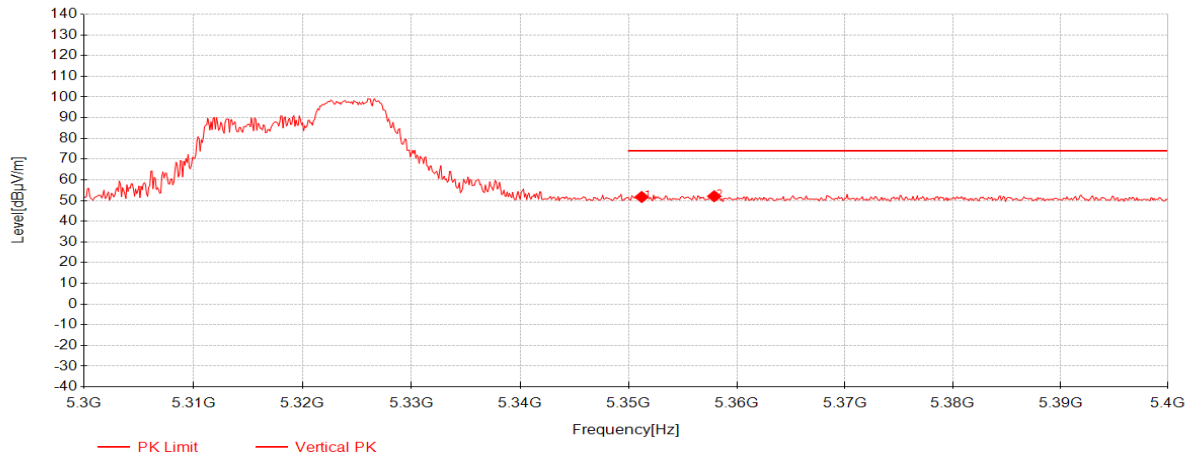

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5351.2	36.44	33.03	-17.75	51.72	74.00	22.28	Vertical
2	5357.9	36.81	33.03	-17.76	52.08	74.00	21.92	Vertical


11be(EHT20)_MRU_Small_Right_RU_(52+26)_TX_CH_64_Veritical_Average

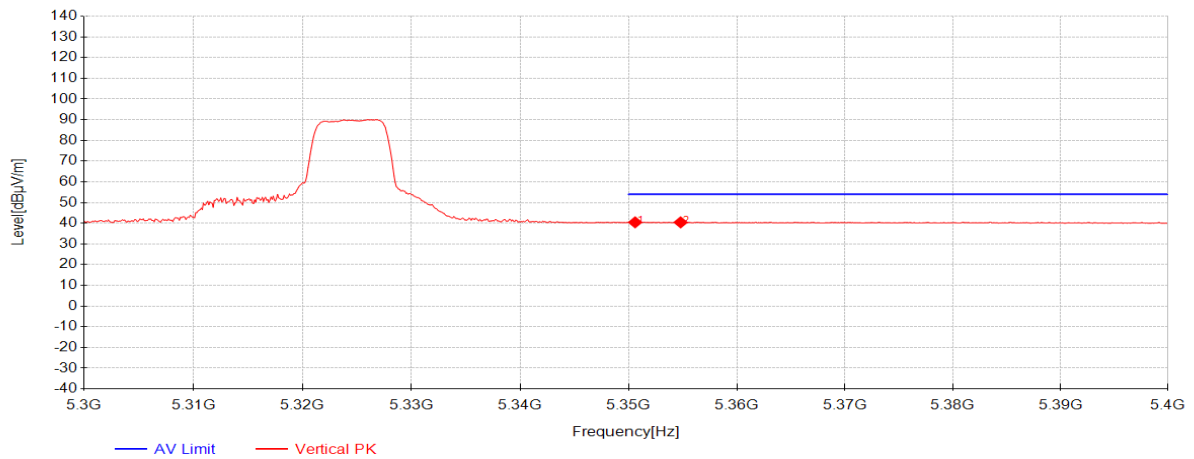

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.6	25.15	33.03	-17.75	40.43	54.00	13.57	Vertical
2	5354.8	25.15	33.03	-17.76	40.42	54.00	13.58	Vertical




11be(EHT20)_MRU_Small_Left_RU_(52+26)_TX_CH_100_Horizontal_Peak

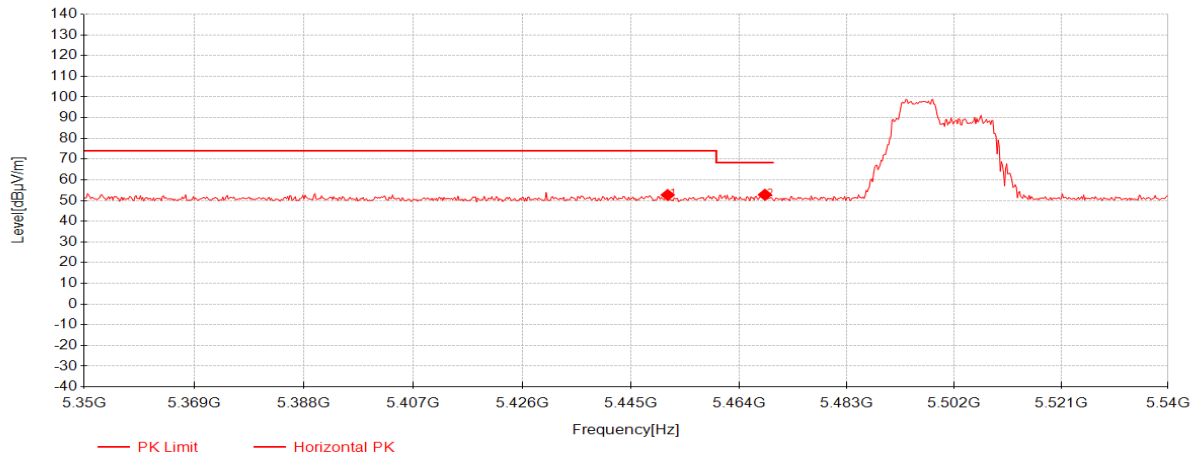

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5451.46	37.34	33.01	-17.67	52.68	74.00	21.32	Horizontal
2	5468.56	37.40	33.01	-17.61	52.79	68.30	15.51	Horizontal




11be(EHT20)_MRU_Small_Left_RU_(52+26)_TX_CH_100_Horizontal_Average

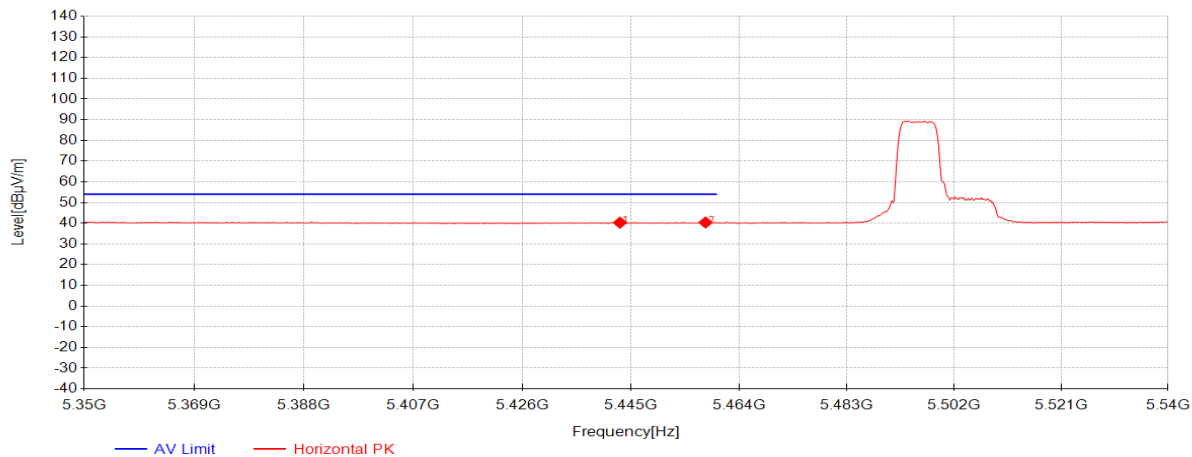


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5443.1	24.98	33.01	-17.69	40.30	54.00	13.70	Horizontal
2	5458.11	25.01	33.01	-17.65	40.37	54.00	13.63	Horizontal

11be(EHT20)_MRU_Small_Left_RU_(52+26)_TX_CH_100_Vertical_Peak

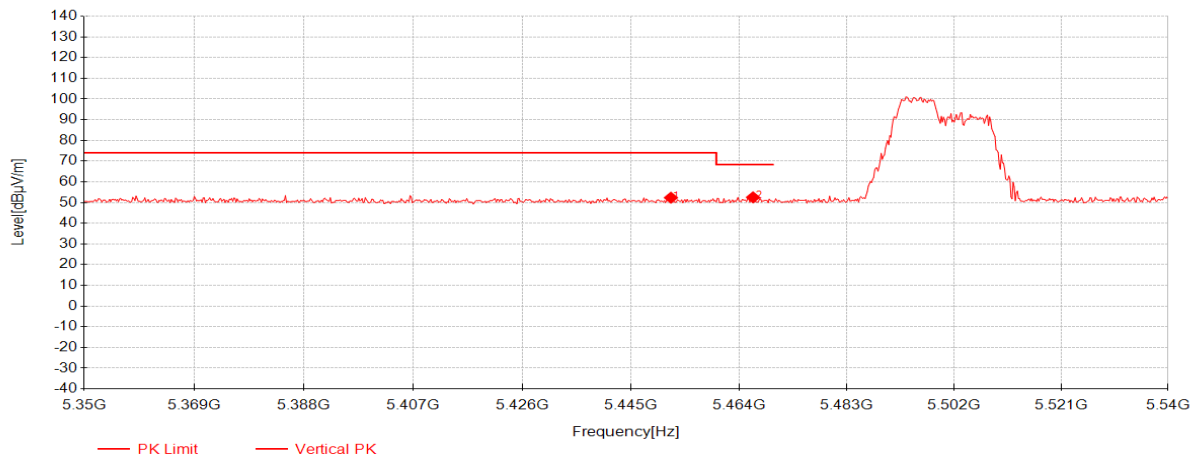

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5452.03	37.00	33.01	-17.66	52.35	74.00	21.65	Vertical
2	5466.47	37.11	33.01	-17.62	52.50	68.30	15.80	Vertical


11be(EHT20)_MRU_Small_Left_RU_(52+26)_TX_CH_100_Veritical_Average

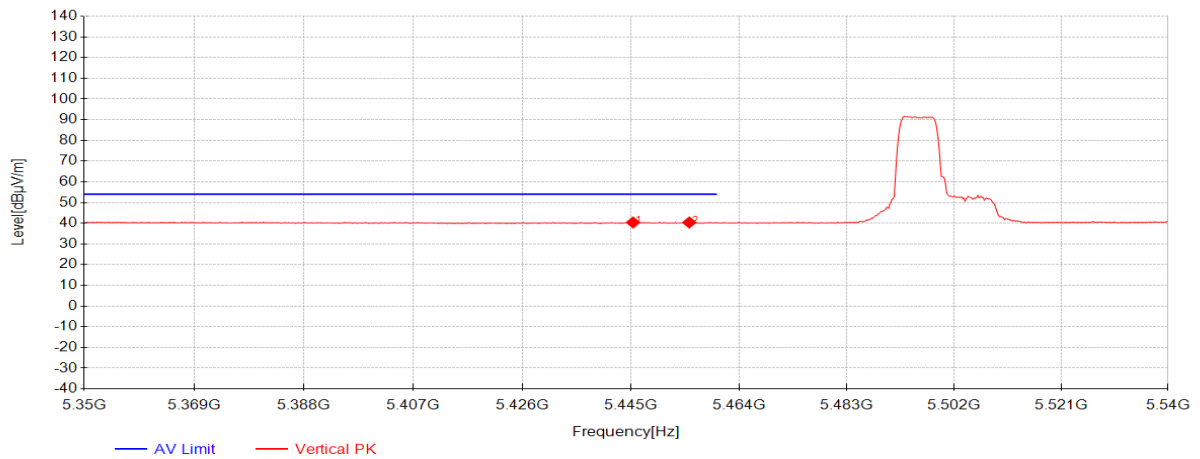

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5445.38	25.05	33.01	-17.68	40.38	54.00	13.62	Vertical
2	5455.26	25.02	33.01	-17.65	40.37	54.00	13.63	Vertical




11be(EHT20)_MRU_Small_Right_RU_(52+26)_TX_CH_140_Horizontal_Peak

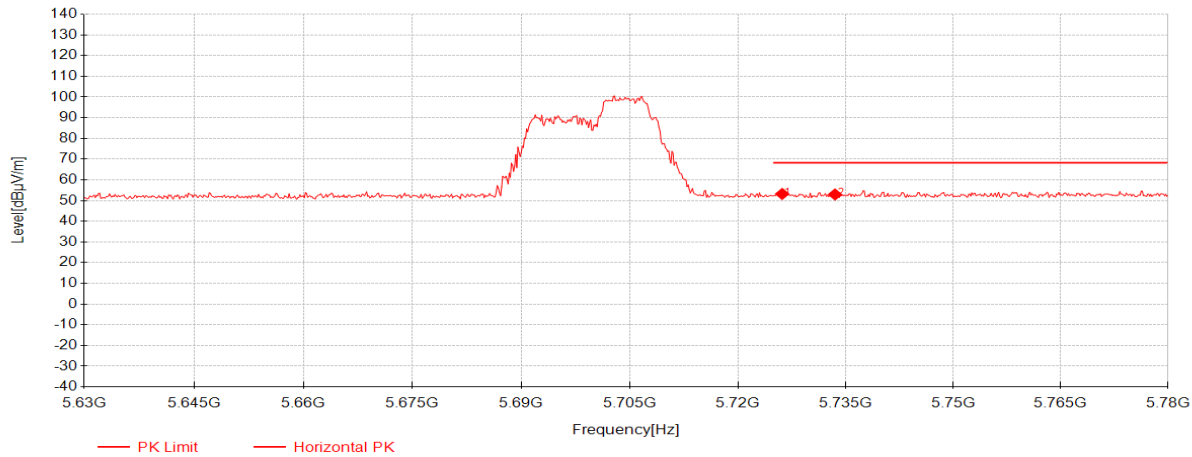


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5726.15	36.77	33.68	-17.25	53.20	68.20	15.00	Horizontal
2	5733.5	36.46	33.70	-17.23	52.93	68.20	15.27	Horizontal

11be(EHT20)_MRU_Small_Right_RU_(52+26)_TX_CH_140_Vertical_Peak

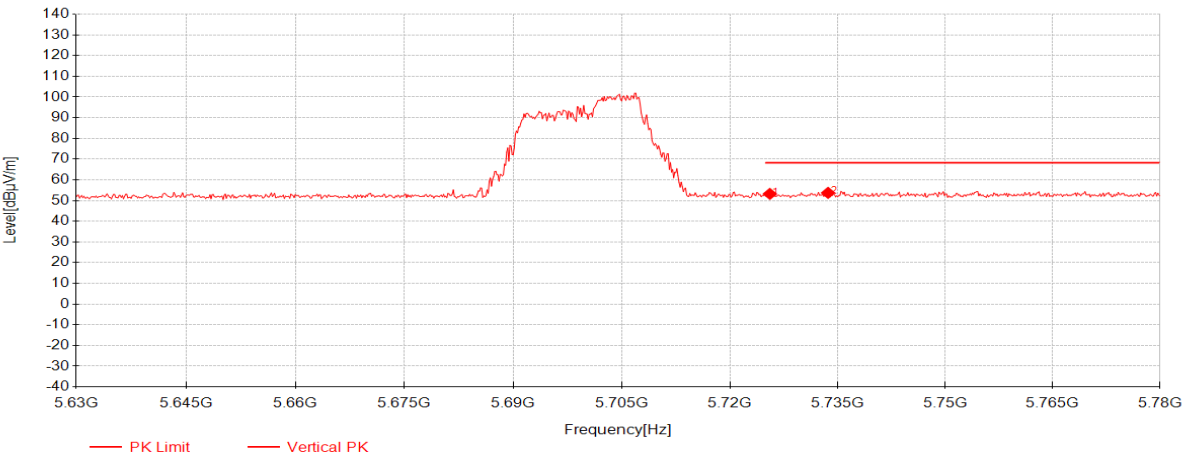


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5725.55	36.79	33.68	-17.25	53.22	68.20	14.98	Vertical
2	5733.65	37.23	33.70	-17.23	53.71	68.20	14.49	Vertical

11be(EHT20)_MRU_Small_Left_RU_(52+26)_TX_CH_149_Horizontal_Peak

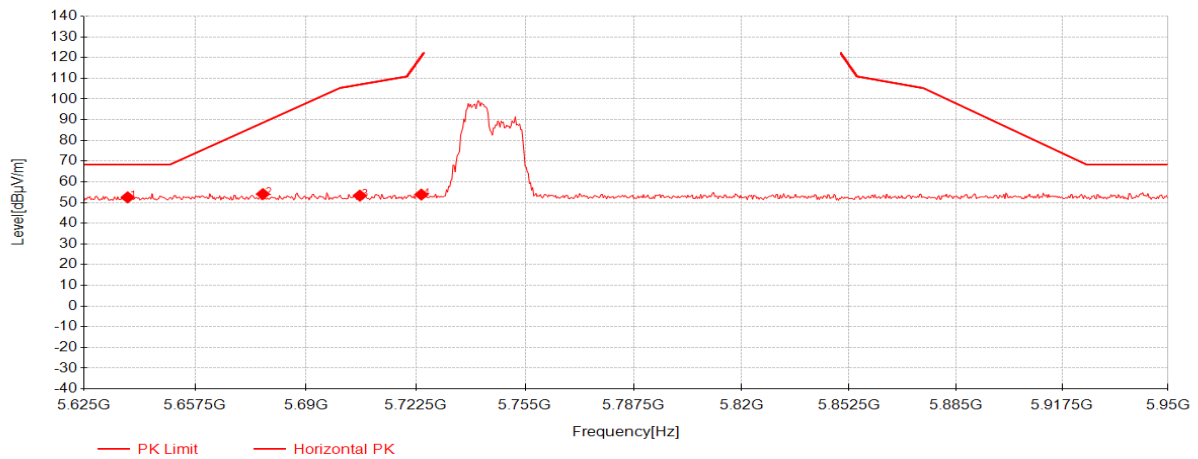


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5637.675	36.35	33.41	-17.27	52.50	68.30	15.80	Horizontal
2	5677.325	37.88	33.53	-17.31	54.10	88.56	34.46	Horizontal
3	5705.925	37.03	33.62	-17.31	53.34	106.96	53.62	Horizontal
4	5724.125	37.43	33.67	-17.26	53.85	120.31	66.46	Horizontal

11be(EHT20)_MRU_Small_Left_RU_(52+26)_TX_CH_149_Vertical_Peak

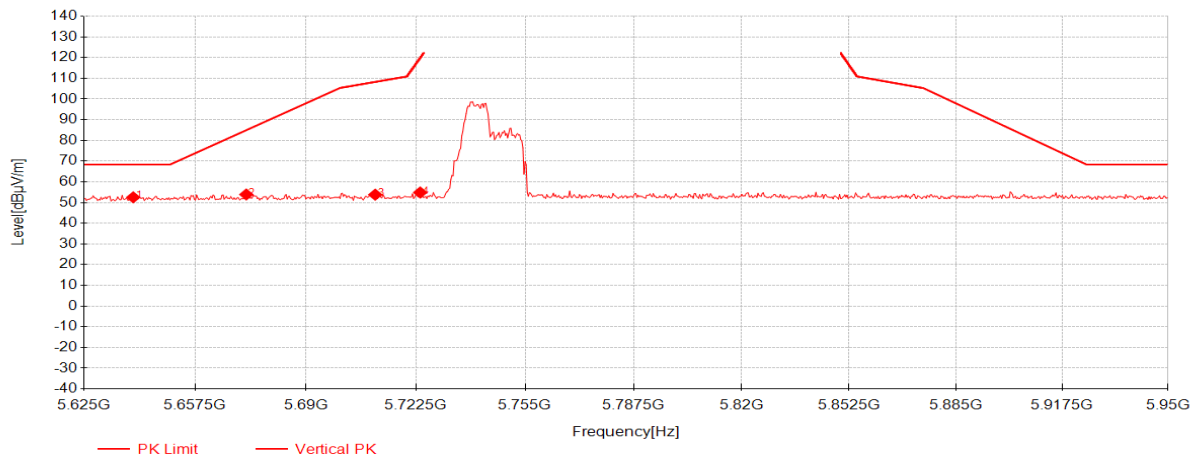


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5639.3	36.38	33.42	-17.27	52.53	68.30	15.77	Vertical
2	5672.45	37.68	33.52	-17.30	53.89	84.95	31.06	Vertical
3	5710.475	37.48	33.63	-17.30	53.81	108.24	54.43	Vertical
4	5723.8	38.44	33.67	-17.26	54.86	119.56	64.70	Vertical

11be(EHT20)_MRU_Smal_Rightl_RU_(52+26)_TX_CH_165_Horizontal_Peak

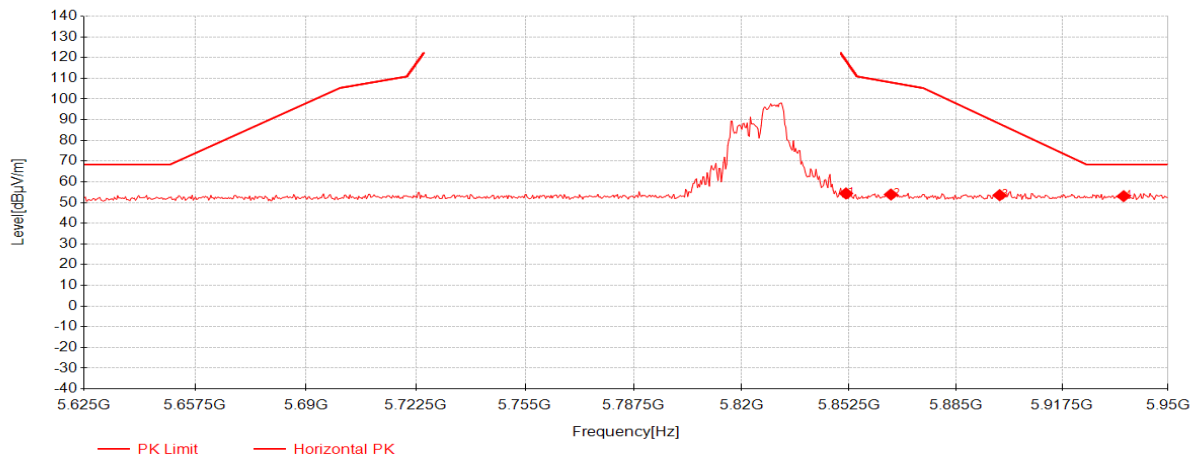


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5851.525	37.26	34.05	-16.91	54.40	118.82	64.42	Horizontal
2	5865.175	36.67	34.10	-16.88	53.88	108.05	54.17	Horizontal
3	5898.325	36.19	34.19	-16.81	53.57	88.00	34.43	Horizontal
4	5936.35	35.70	34.31	-16.92	53.09	68.30	15.21	Horizontal

11be(EHT20)_MRU_Small_Right_RU_(52+26)_TX_CH_165_Vertical_Peak

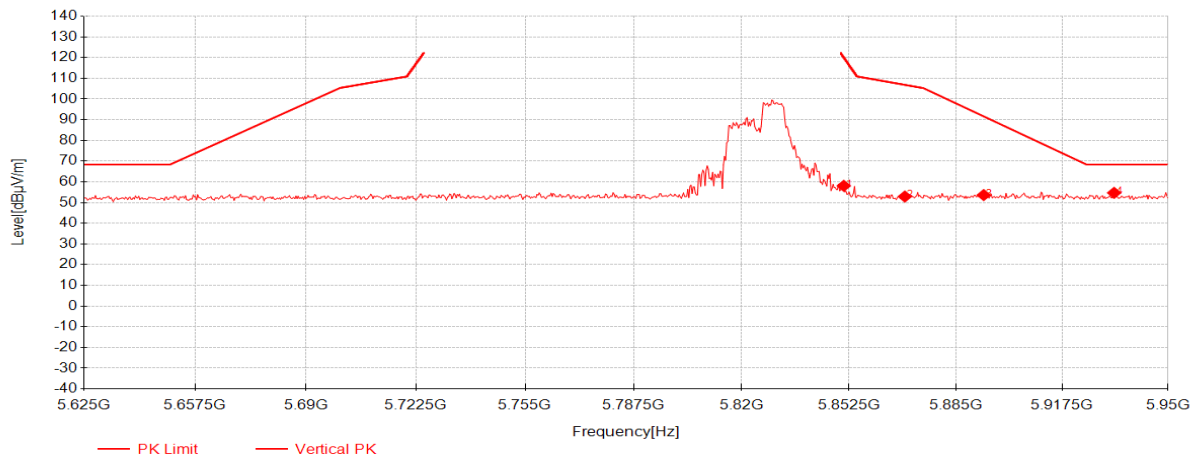


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5850.875	40.94	34.05	-16.91	58.08	120.30	62.22	Vertical
2	5869.4	35.67	34.11	-16.87	52.90	106.87	53.97	Vertical
3	5893.45	36.25	34.18	-16.82	53.61	91.61	38.00	Vertical
4	5933.425	37.29	34.30	-16.91	54.68	68.30	13.62	Vertical

11be(EHT20)_MRU_Small_Left_RU_(26+106)_TX_CH_36_Horizontal_Peak

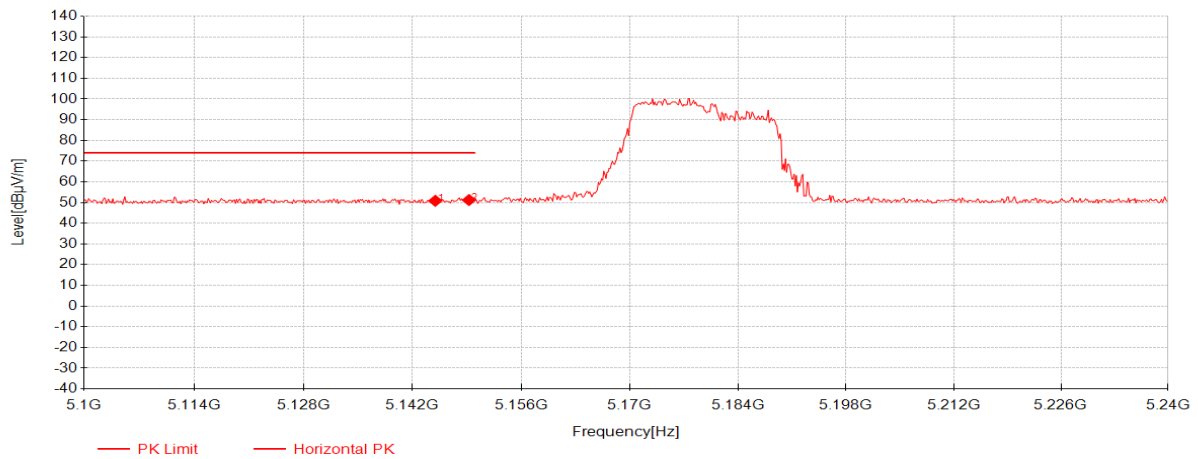

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5144.94	35.96	33.07	-18.20	50.84	74.00	23.16	Horizontal
2	5149.28	36.33	33.07	-18.18	51.22	74.00	22.78	Horizontal


11be(EHT20)_MRU_Small_Left_RU_(26+106)_TX_CH_36_Horizontal_Average

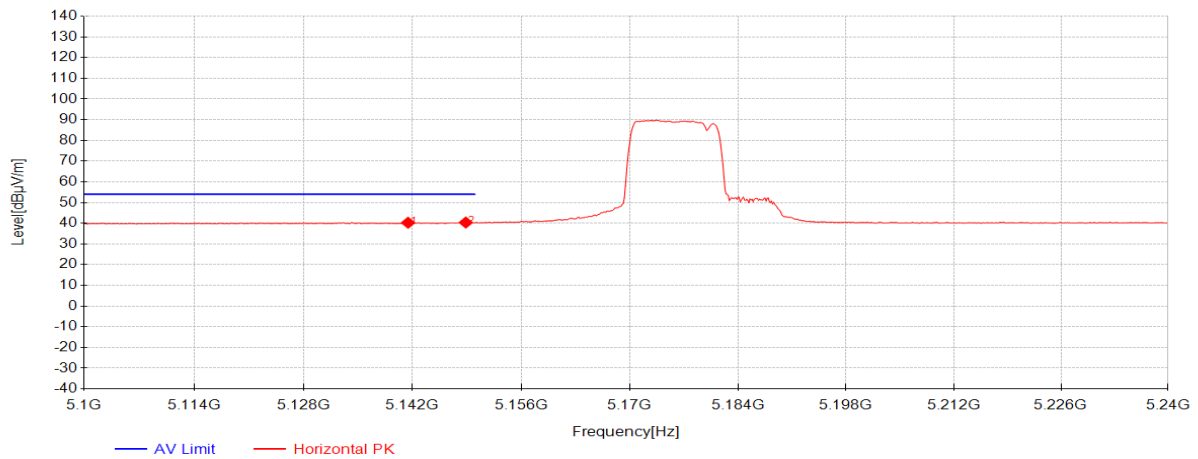

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5141.44	25.37	33.07	-18.21	40.24	54.00	13.76	Horizontal
2	5148.86	25.46	33.07	-18.18	40.35	54.00	13.65	Horizontal




11be(EHT20)_MRU_Small_Left_RU_(26+106)_TX_CH_36_Vertical_Peak

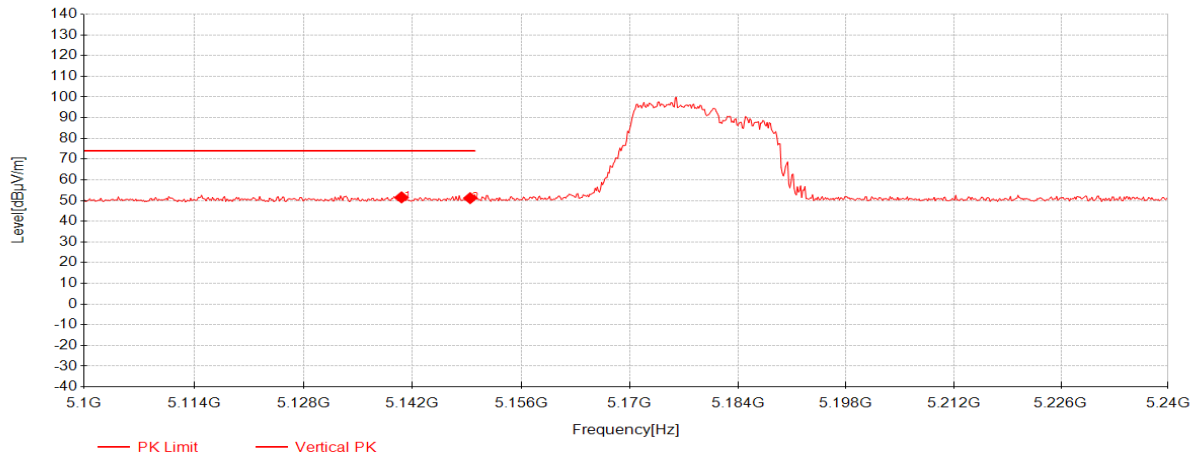


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5140.6	36.67	33.07	-18.21	51.53	74.00	22.47	Vertical
2	5149.42	36.26	33.07	-18.18	51.15	74.00	22.85	Vertical

11be(EHT20)_MRU_Small_Left_RU_(26+106)_TX_CH_36_Veritical_Average

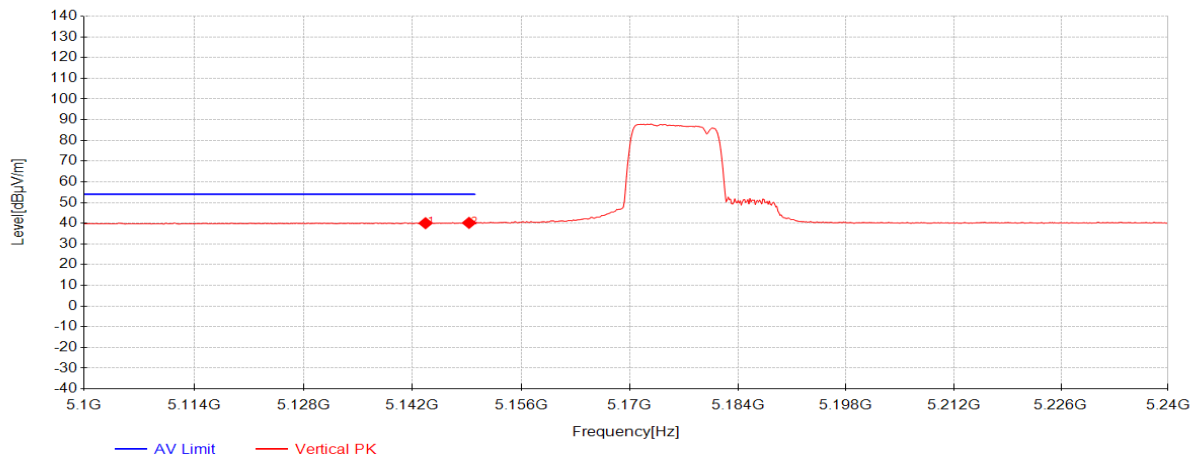


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5143.68	25.15	33.07	-18.20	40.02	54.00	13.98	Vertical
2	5149.28	25.29	33.07	-18.18	40.18	54.00	13.82	Vertical

11be(EHT20)_MRU_Small_Right_RU_(26+106)_TX_CH_64_Horizontal_Peak

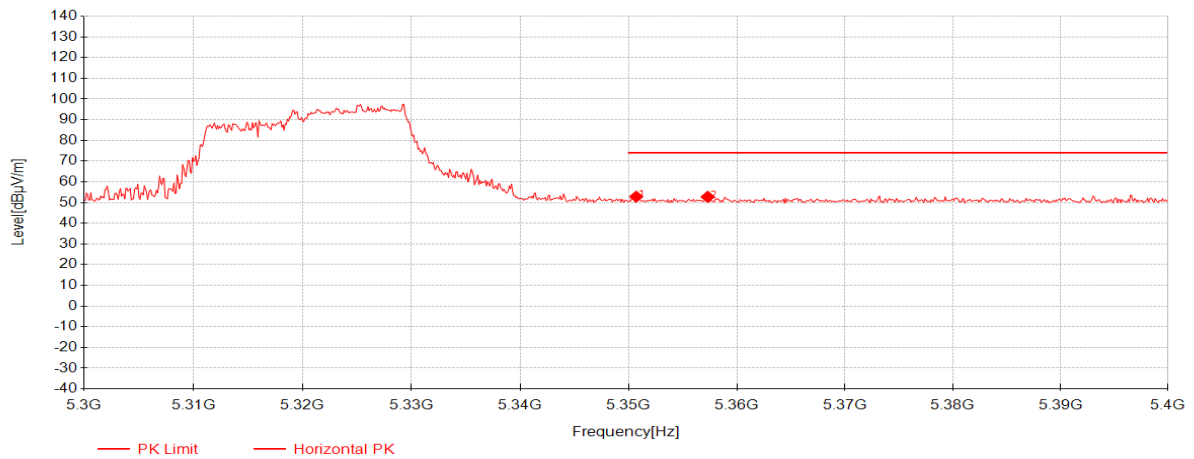


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.7	37.56	33.03	-17.75	52.84	74.00	21.16	Horizontal
2	5357.3	37.48	33.03	-17.76	52.75	74.00	21.25	Horizontal

11be(EHT20)_MRU_Small_Right_RU_(26+106)_TX_CH_64_Horizontal_Average

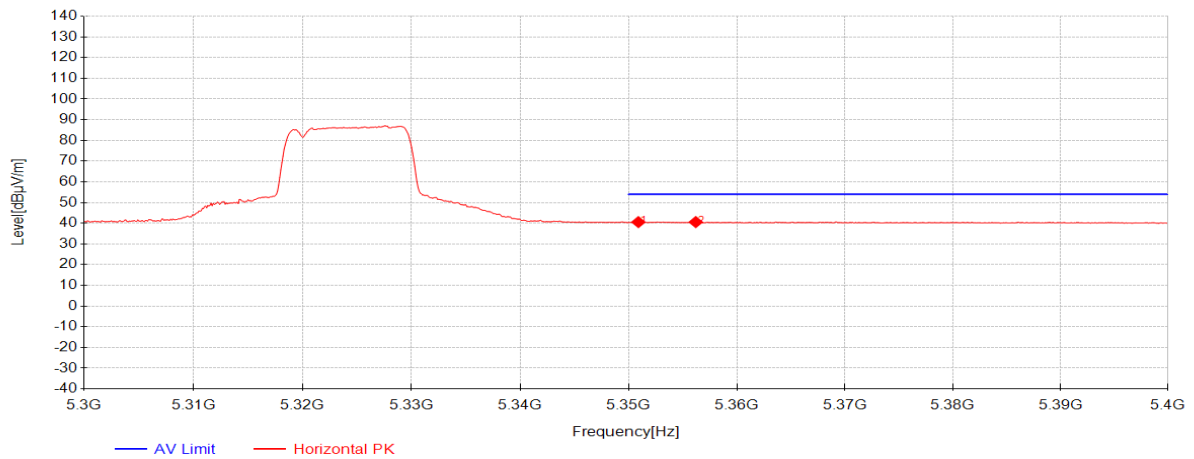

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.9	25.27	33.03	-17.75	40.55	54.00	13.45	Horizontal
2	5356.2	25.29	33.03	-17.76	40.56	54.00	13.44	Horizontal


11be(EHT20)_MRU_Small_Right_RU_(26+106)_TX_CH_64_Vertical_Peak

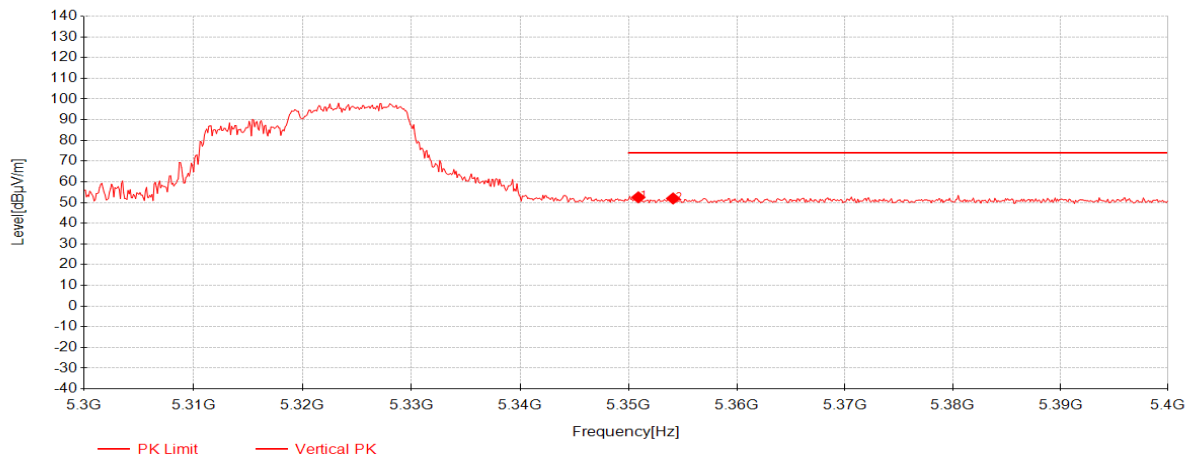

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.9	37.24	33.03	-17.75	52.52	74.00	21.48	Vertical
2	5354.1	36.68	33.03	-17.76	51.95	74.00	22.05	Vertical




11be(EHT20)_MRU_Small_Right_RU_(26+106)_TX_CH_64_Vertical_Average

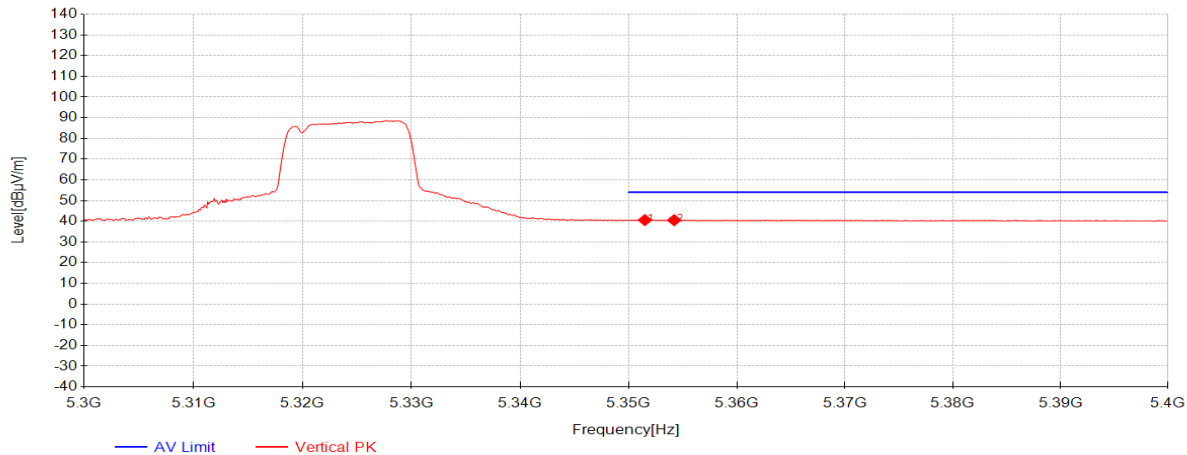

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5351.5	25.29	33.03	-17.75	40.57	54.00	13.43	Vertical
2	5354.2	25.23	33.03	-17.76	40.50	54.00	13.50	Vertical




11be(EHT20)_MRU_Small_Left_RU_(26+106)_TX_CH_100_Horizontal_Peak

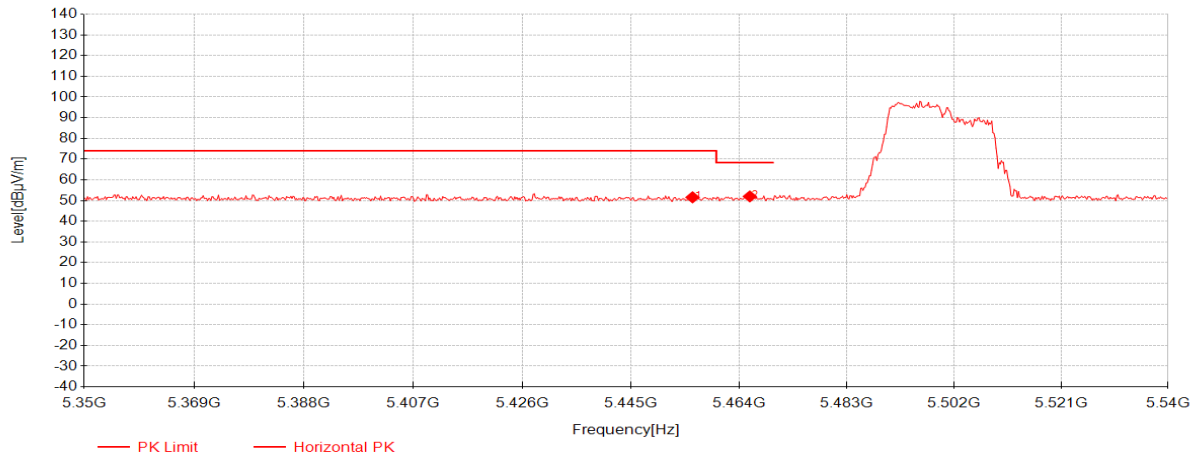

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5455.83	36.19	33.01	-17.65	51.55	74.00	22.45	Horizontal
2	5465.9	36.60	33.01	-17.62	51.98	68.30	16.32	Horizontal




11be(EHT20)_MRU_Small_Left_RU_(26+106)_TX_CH_100_Horizontal_Average

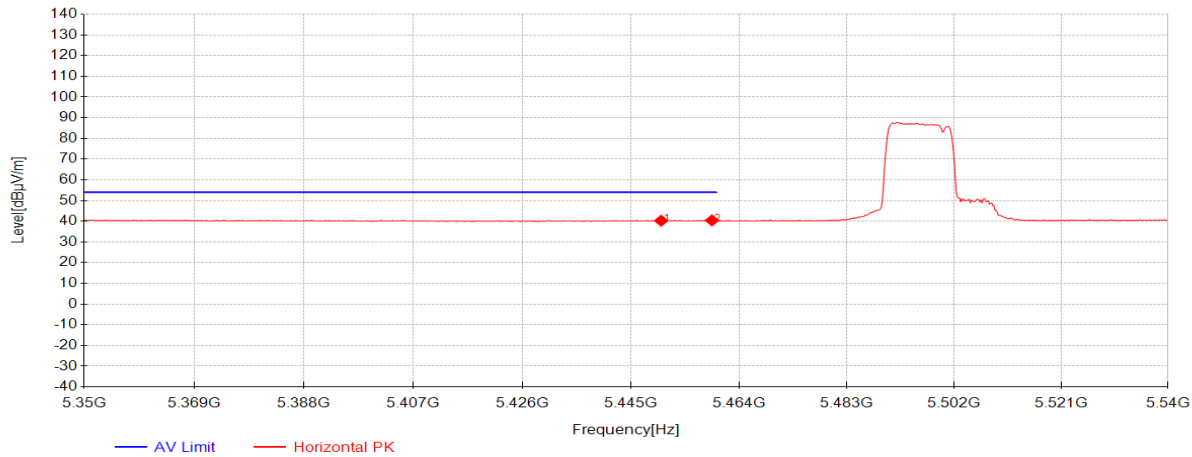

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5450.32	24.91	33.01	-17.67	40.25	54.00	13.75	Horizontal
2	5459.25	25.05	33.01	-17.64	40.42	54.00	13.58	Horizontal




11be(EHT20)_MRU_Small_Left_RU_(26+106)_TX_CH_100_Vertical_Peak

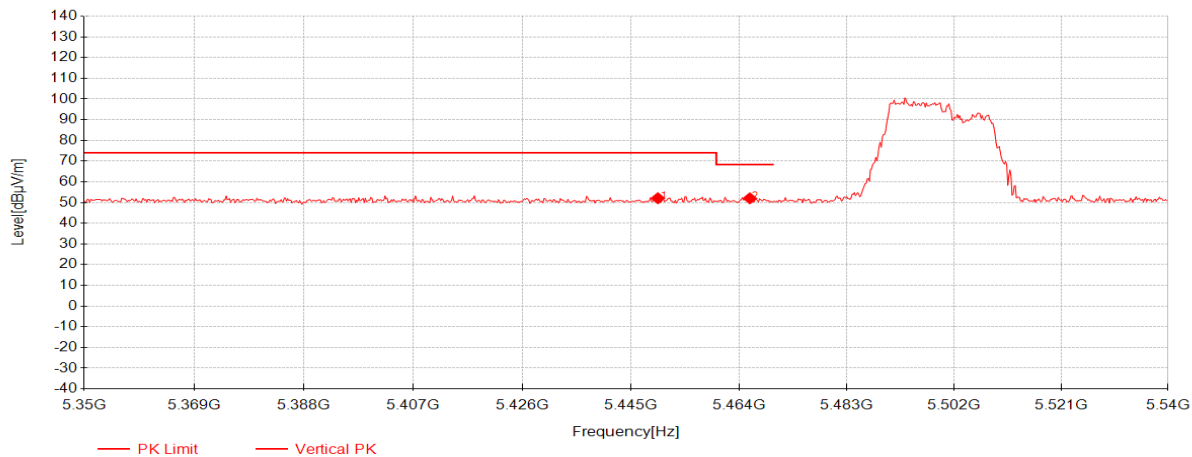

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5449.75	36.73	33.01	-17.67	52.07	74.00	21.93	Vertical
2	5465.9	36.67	33.01	-17.62	52.05	68.30	16.25	Vertical




11be(EHT20)_MRU_Small_Left_RU_(26+106)_TX_CH_100_Vertical_Average

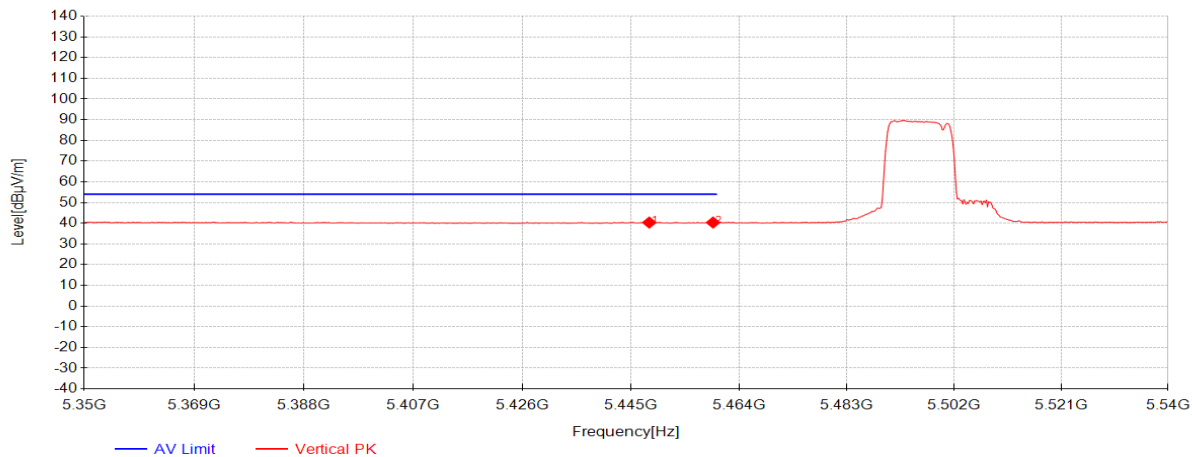


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5448.23	24.98	33.01	-17.68	40.32	54.00	13.68	Vertical
2	5459.44	24.96	33.01	-17.64	40.33	54.00	13.67	Vertical

11be(EHT20)_MRU_Small_Right_RU_(26+106)_TX_CH_140_Horizontal_Peak

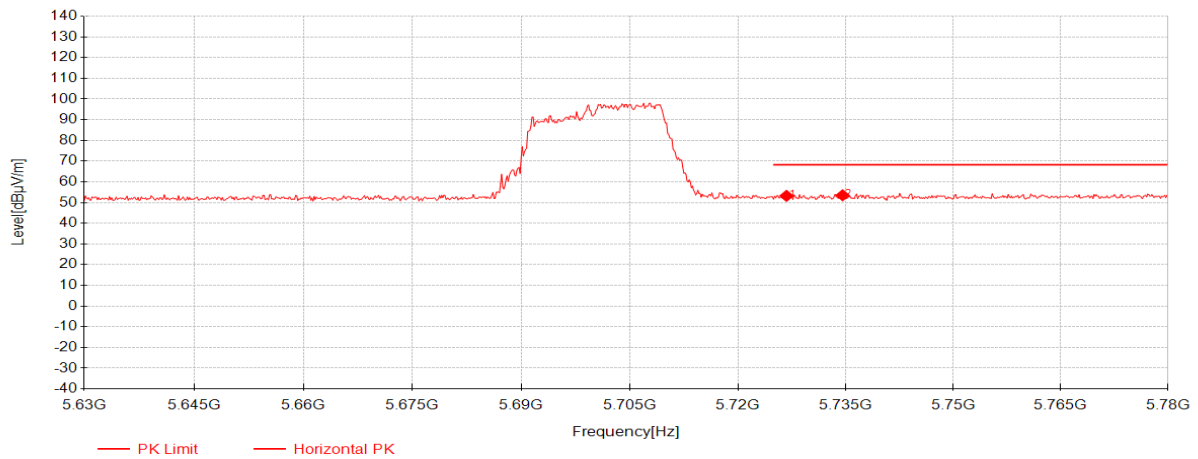


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5726.75	36.79	33.68	-17.25	53.22	68.20	14.98	Horizontal
2	5734.55	37.03	33.70	-17.22	53.51	68.20	14.69	Horizontal

11be(EHT20)_MRU_Small_Right_RU_(26+106)_TX_CH_140_Vertical_Peak

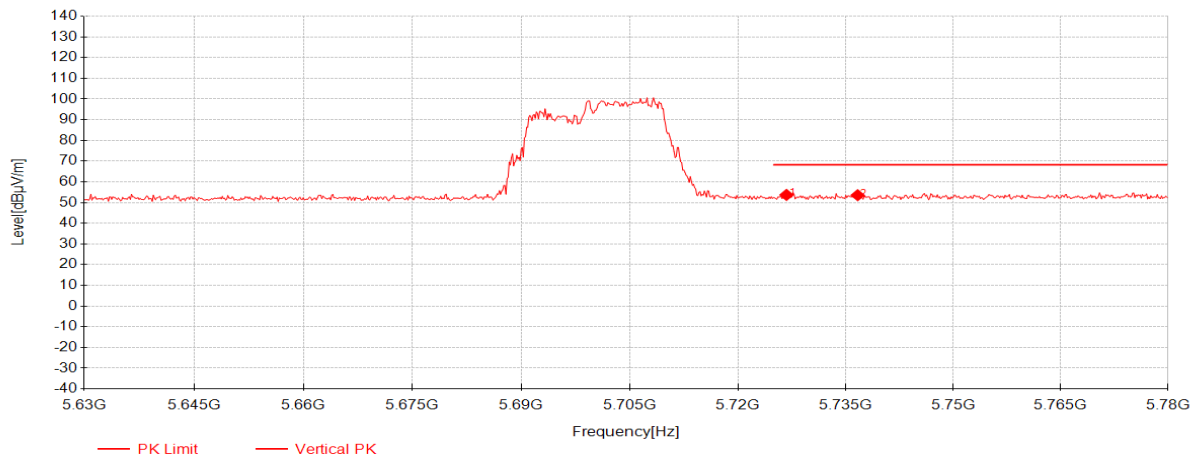


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5726.75	37.26	33.68	-17.25	53.69	68.20	14.51	Vertical
2	5736.65	37.05	33.71	-17.22	53.54	68.20	14.66	Vertical

11be(EHT20)_MRU_Small_Left_RU_(26+106)_TX_CH_149_Horizontal_Peak

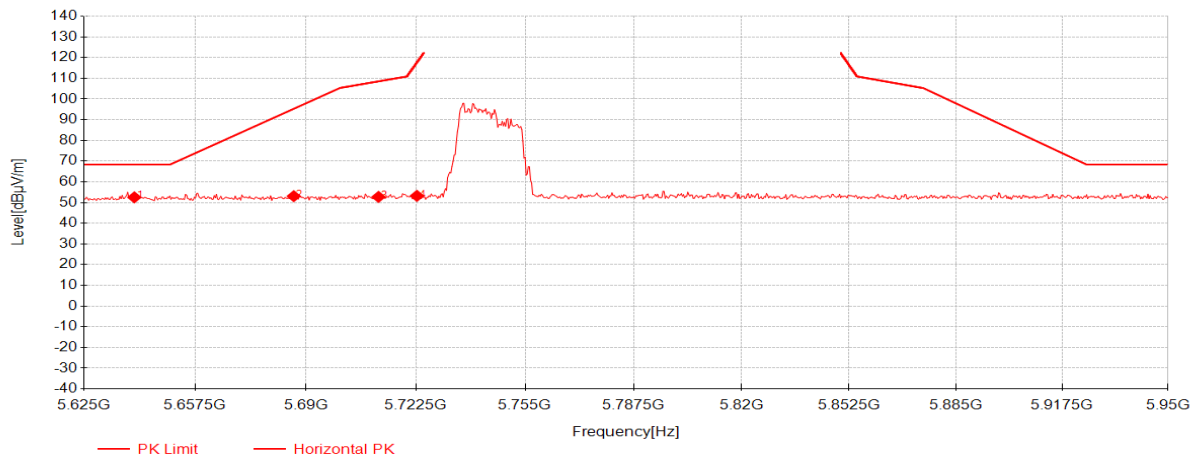


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5639.625	36.36	33.42	-17.27	52.51	68.30	15.79	Horizontal
2	5686.425	36.84	33.56	-17.32	53.08	95.29	42.21	Horizontal
3	5711.45	36.40	33.63	-17.29	52.74	108.51	55.77	Horizontal
4	5722.825	36.81	33.67	-17.26	53.22	117.34	64.12	Horizontal

11be(EHT20)_MRU_Small_Left_RU_(26+106)_TX_CH_149_Vertical_Peak

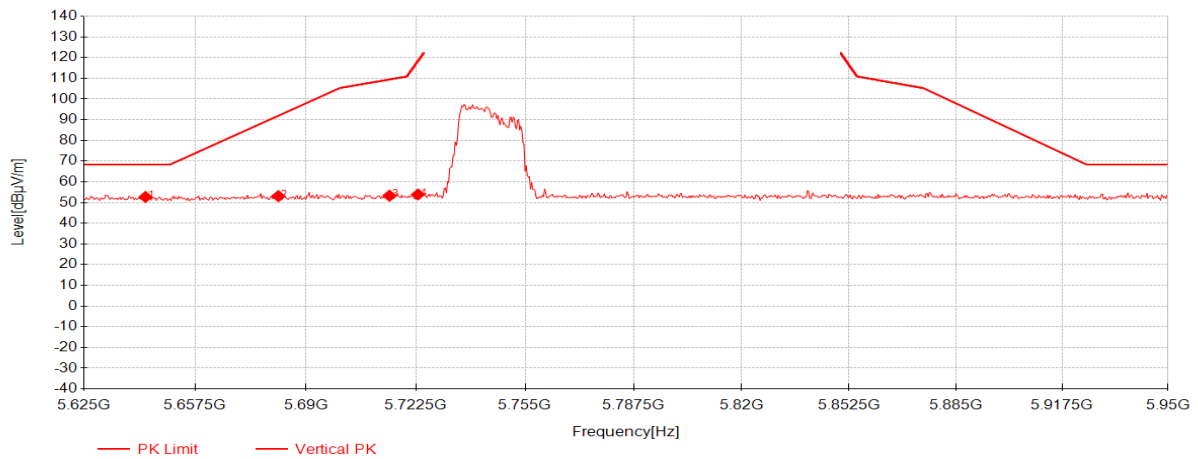


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5642.875	36.54	33.43	-17.27	52.70	68.30	15.60	Vertical
2	5681.875	36.87	33.55	-17.31	53.10	91.93	38.83	Vertical
3	5714.7	36.94	33.64	-17.28	53.30	109.42	56.12	Vertical
4	5723.15	37.49	33.67	-17.26	53.90	118.08	64.18	Vertical

11be(EHT20)_MRU_Small_Right_RU_(26+106)_TX_CH_165_Horizontal_Peak

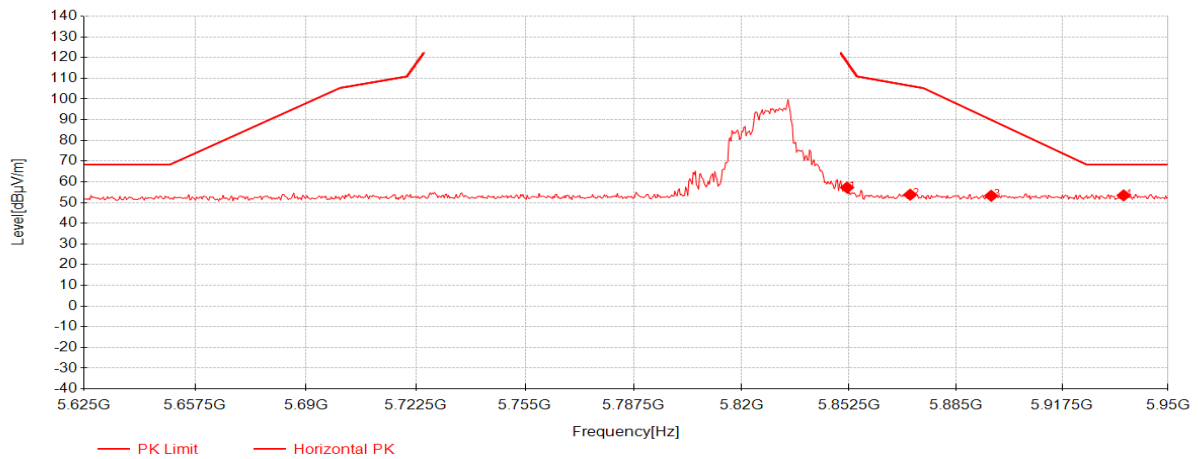


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5851.85	40.10	34.06	-16.91	57.24	118.08	60.84	Horizontal
2	5871.025	36.56	34.11	-16.87	53.80	106.41	52.61	Horizontal
3	5895.725	35.89	34.19	-16.82	53.26	89.93	36.67	Horizontal
4	5936.35	36.07	34.31	-16.92	53.46	68.30	14.84	Horizontal

11be(EHT20)_MRU_Small_Right_RU_(26+106)_TX_CH_165_Vertical_Peak

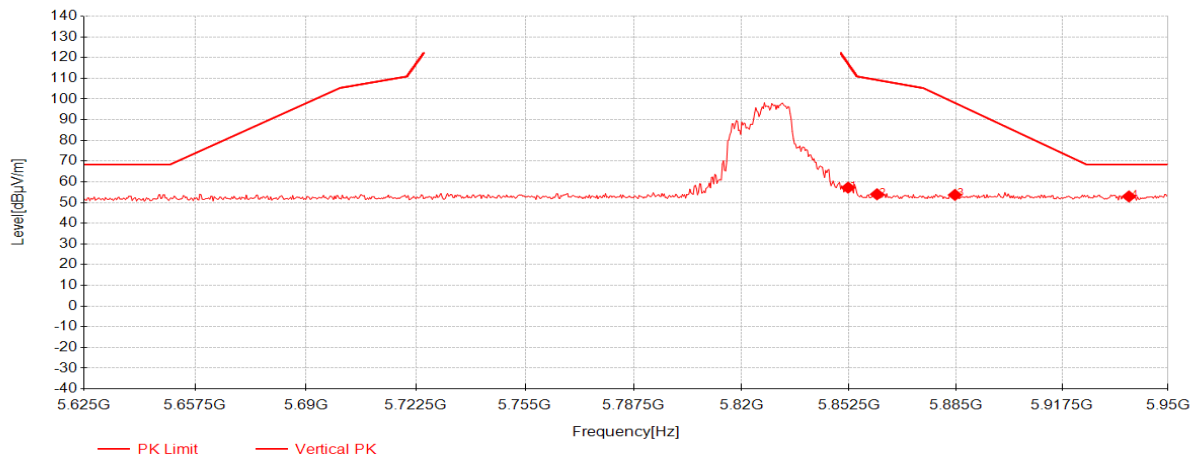


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5852.175	40.06	34.06	-16.91	57.21	117.34	60.13	Vertical
2	5860.95	36.81	34.08	-16.89	54.00	109.23	55.23	Vertical
3	5884.675	36.37	34.15	-16.84	53.68	98.12	44.44	Vertical
4	5937.975	35.55	34.31	-16.93	52.94	68.30	15.36	Vertical

11be(EHT80)_MRU_Small_RU_(242+484)_TX_CH_42_Horizontal_Peak

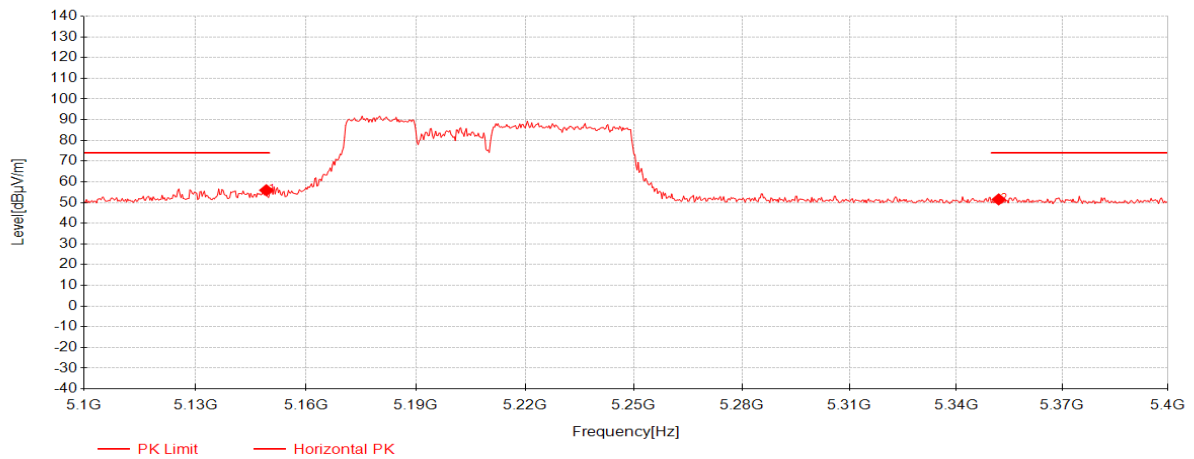

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5149.2	41.07	33.07	-18.18	55.96	74.00	18.04	Horizontal
2	5352	36.23	33.03	-17.75	51.51	74.00	22.49	Horizontal


11be(EHT80)_MRU_Small_RU_(242+484)_TX_CH_42_Horizontal_Average

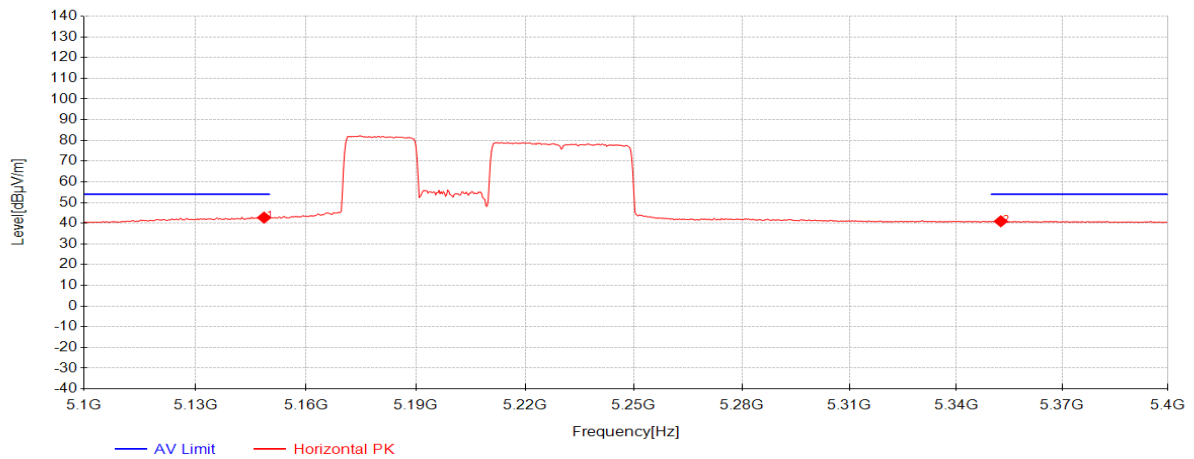

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.6	27.82	33.07	-18.18	42.71	54.00	11.29	Horizontal
2	5352.6	25.67	33.03	-17.75	40.95	54.00	13.05	Horizontal




11be(EHT80)_MRU_Small_RU_(242+484)_TX_CH_42_Vertical_Peak

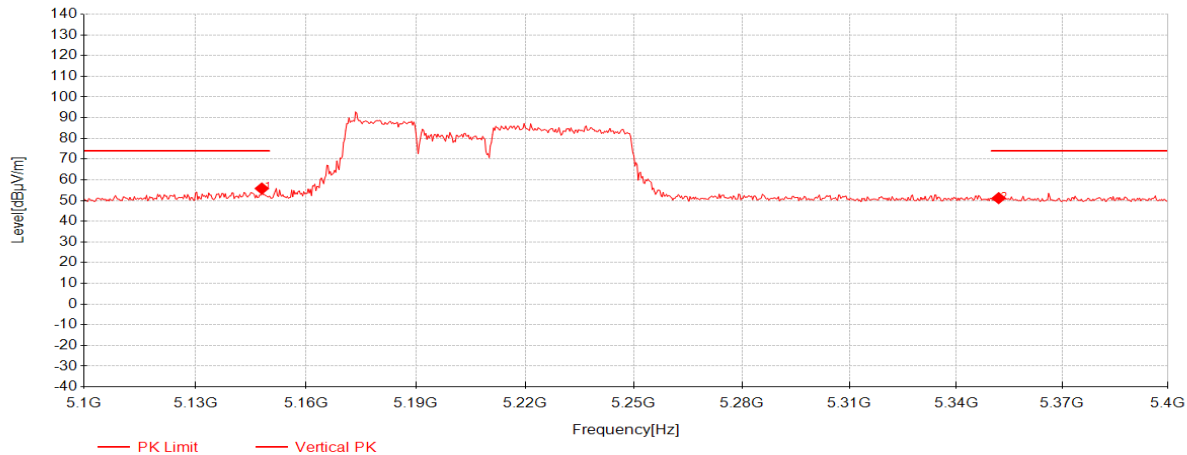

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148	40.94	33.07	-18.19	55.82	74.00	18.18	Vertical
2	5352	35.88	33.03	-17.75	51.16	74.00	22.84	Vertical


11be(EHT80)_MRU_Small_RU_(242+484)_TX_CH_42_Vetical_Average

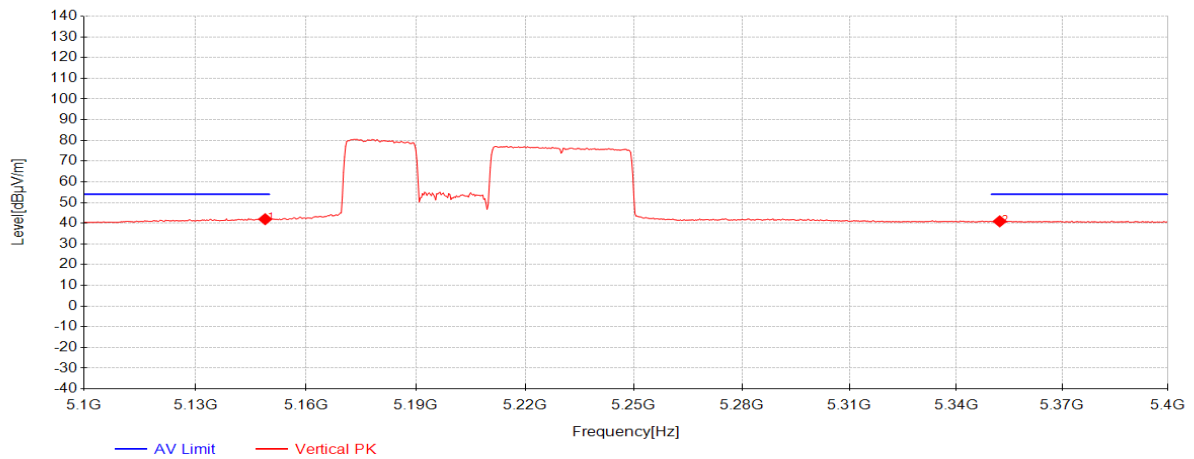

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.9	27.06	33.07	-18.18	41.95	54.00	12.05	Vertical
2	5352.3	25.63	33.03	-17.75	40.91	54.00	13.09	Vertical




11be(EHT80)_MRU_Small_RU_(242+484)_TX_CH_58_Horizontal_Peak

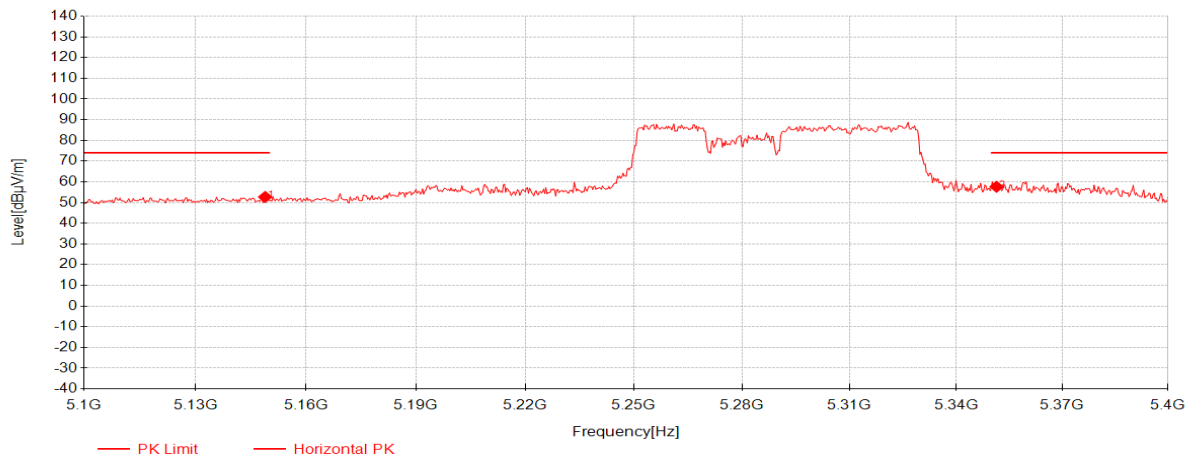

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.9	37.80	33.07	-18.18	52.69	74.00	21.31	Horizontal
2	5351.4	42.35	33.03	-17.75	57.63	74.00	16.37	Horizontal




11be(EHT80)_MRU_Small_RU_(242+484)_TX_CH_58_Horizontal_Average

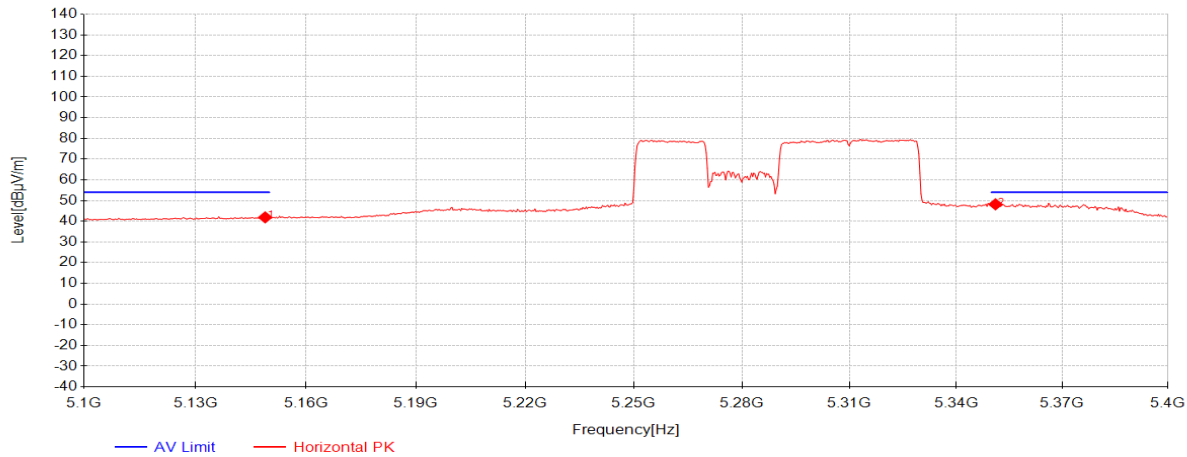

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.9	26.98	33.07	-18.18	41.87	54.00	12.13	Horizontal
2	5351.1	32.89	33.03	-17.75	48.17	54.00	5.83	Horizontal




11be(EHT80)_MRU_Small_RU_(242+484)_TX_CH_58_Vetical_Peak

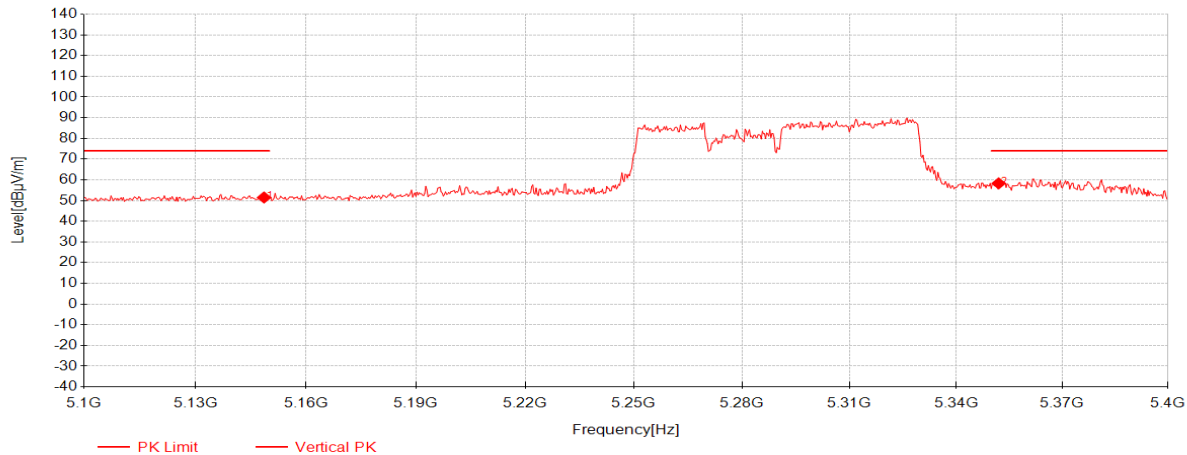


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.6	36.59	33.07	-18.18	51.48	74.00	22.52	Vertical
2	5352	43.02	33.03	-17.75	58.30	74.00	15.70	Vertical

11be(EHT80)_MRU_Small_RU_(242+484)_TX_CH_58_Vetical_Average

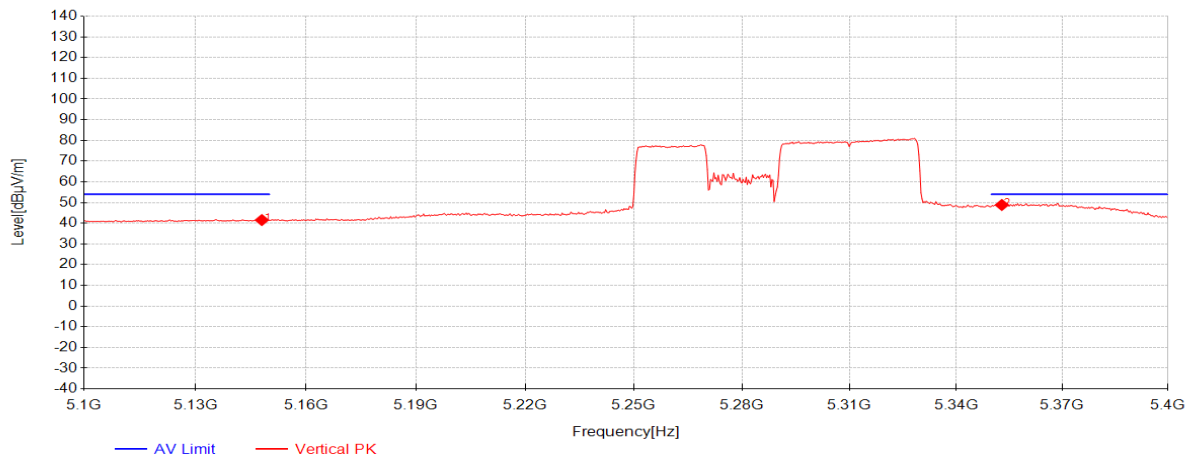


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148	26.66	33.07	-18.19	41.54	54.00	12.46	Vertical
2	5352.9	33.55	33.03	-17.75	48.83	54.00	5.17	Vertical

11be(EHT80)_MRU_Small_RU_(242+484)_TX_CH_106_Horizontal_Peak

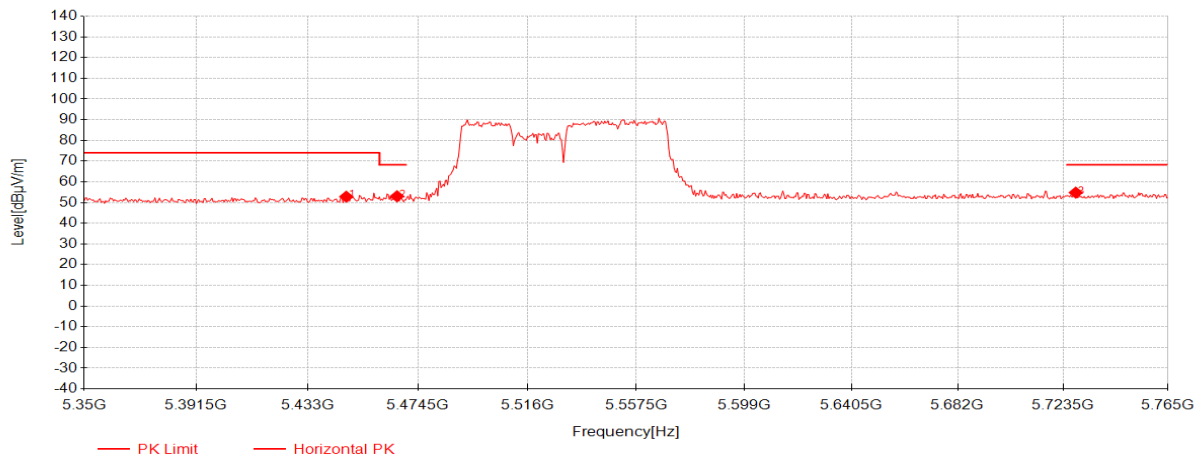


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5447.525	37.51	33.01	-17.68	52.84	74.00	21.16	Horizontal
2	5466.615	37.64	33.01	-17.62	53.03	68.20	15.17	Horizontal
3	5728.48	38.36	33.69	-17.24	54.80	68.20	13.40	Horizontal

11be(EHT80)_MRU_Small_RU_(242+484)_TX_CH_106_Horizontal_Average

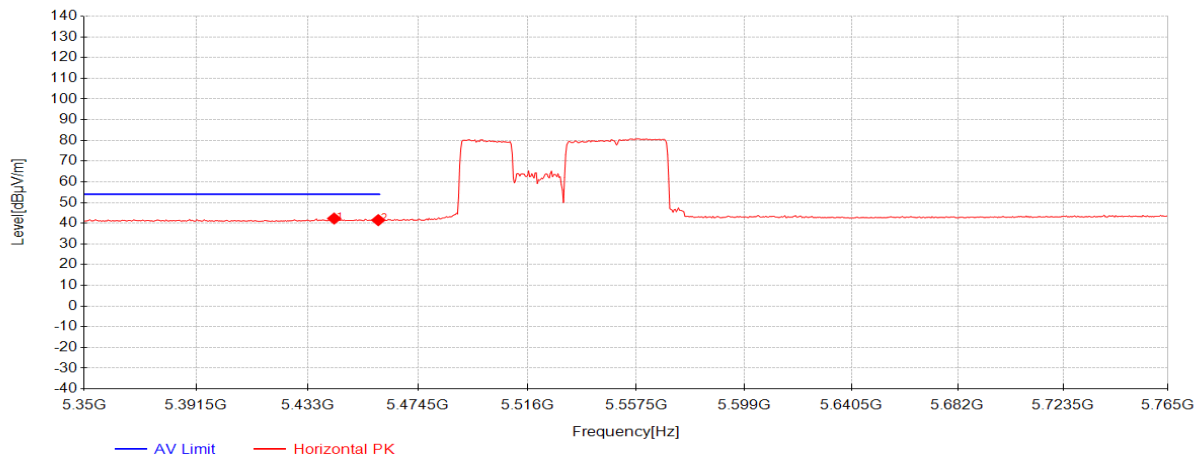


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5442.96	26.95	33.01	-17.69	42.27	54.00	11.73	Horizontal
2	5459.56	26.13	33.01	-17.64	41.50	54.00	12.50	Horizontal

11be(EHT80)_MRU_Small_RU_(242+484)_TX_CH_106_Vertical_Peak

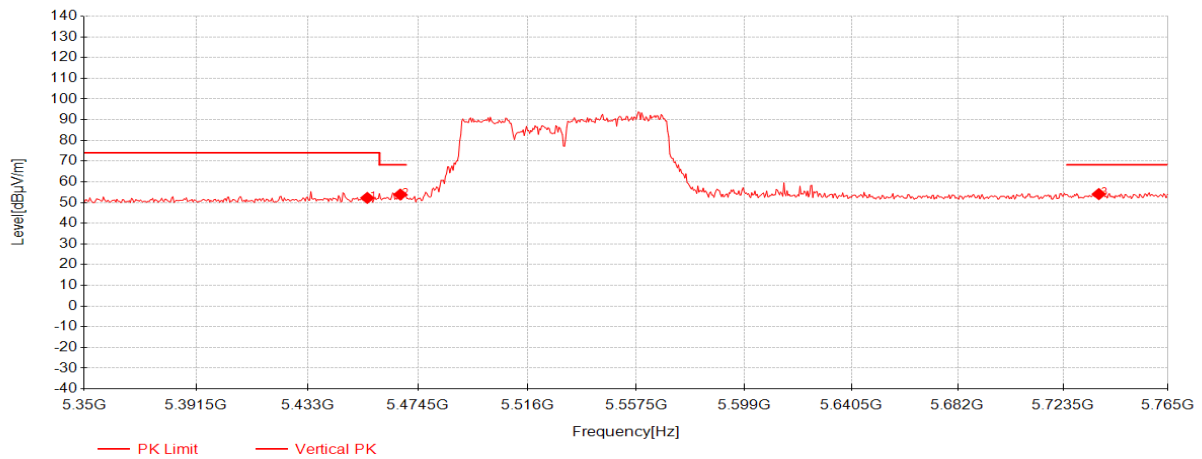


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5455.41	36.89	33.01	-17.65	52.25	74.00	21.75	Vertical
2	5467.86	38.48	33.01	-17.62	53.87	68.20	14.33	Vertical
3	5737.61	37.60	33.71	-17.21	54.10	68.20	14.10	Vertical

11be(EHT80)_MRU_Small_RU_(242+484)_TX_CH_106_Vertical_Average

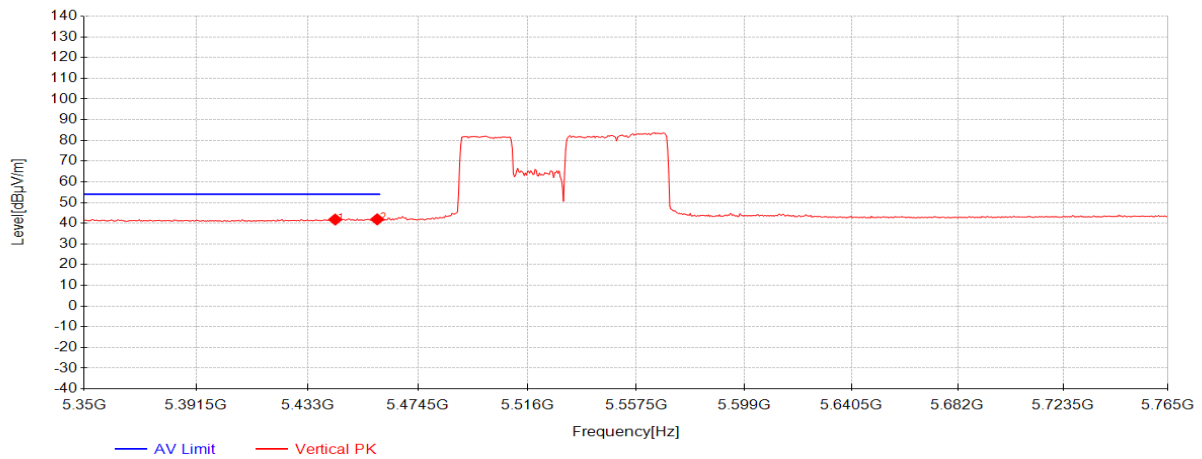


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5443.375	26.47	33.01	-17.69	41.79	54.00	12.21	Vertical
2	5459.145	26.51	33.01	-17.64	41.88	54.00	12.12	Vertical

11be(EHT80)_MRU_Small_RU_(242+484)_TX_CH_155_Horizontal_Peak

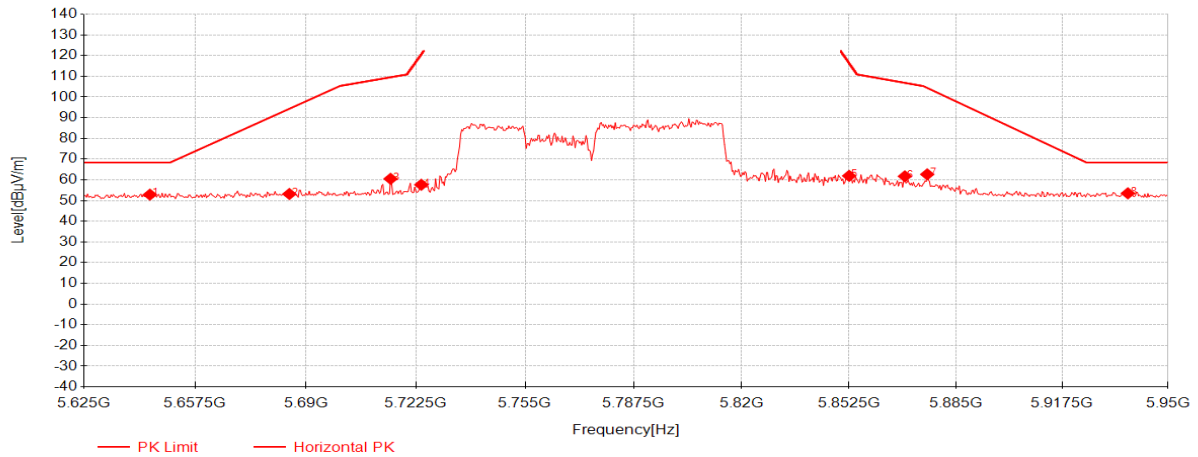

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5644.175	36.71	33.43	-17.27	52.87	68.30	15.43	Horizontal
2	5685.125	36.92	33.56	-17.32	53.16	94.33	41.17	Horizontal
3	5715.025	44.13	33.65	-17.28	60.49	109.51	49.02	Horizontal
4	5724.125	41.20	33.67	-17.26	57.62	120.31	62.69	Horizontal
5	5852.5	44.76	34.06	-16.91	61.91	116.60	54.69	Horizontal
6	5869.4	44.47	34.11	-16.87	61.70	106.87	45.17	Horizontal
7	5876.225	45.37	34.13	-16.86	62.64	104.39	41.75	Horizontal
8	5937.65	36.09	34.31	-16.93	53.48	68.30	14.82	Horizontal


11be(EHT80)_MRU_Small_RU_(242+484)_TX_CH_155_Veritical_Peak

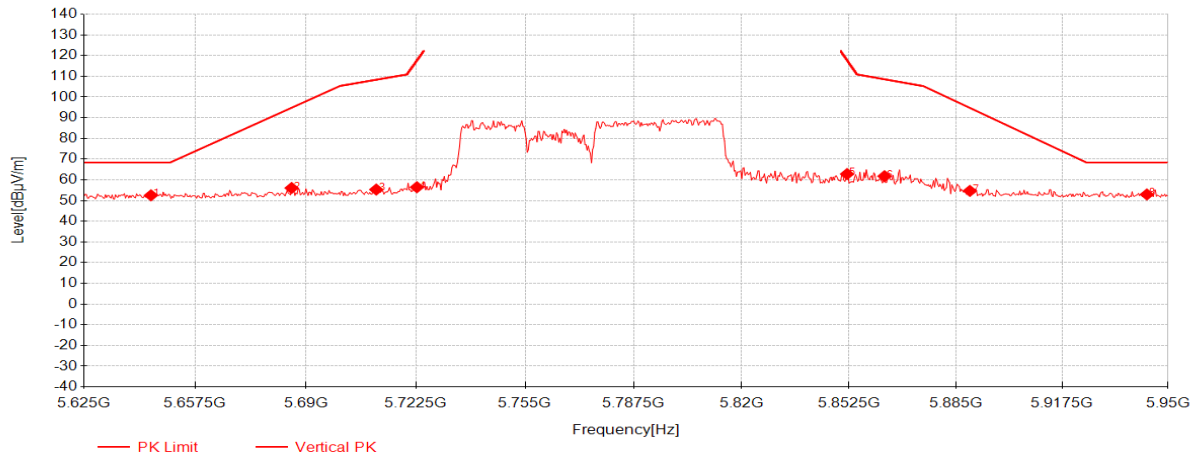

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5644.5	36.36	33.43	-17.27	52.52	68.30	15.78	Vertical
2	5685.775	39.82	33.56	-17.32	56.06	94.81	38.75	Vertical
3	5710.8	38.97	33.63	-17.30	55.31	108.33	53.02	Vertical
4	5722.825	40.02	33.67	-17.26	56.43	117.34	60.91	Vertical
5	5851.85	45.66	34.06	-16.91	62.80	118.08	55.28	Vertical
6	5863.225	44.56	34.09	-16.89	61.76	108.59	46.83	Vertical
7	5889.225	37.32	34.17	-16.83	54.66	94.74	40.08	Vertical
8	5943.5	35.55	34.33	-16.94	52.94	68.30	15.36	Vertical




11be(EHT80)_Puncturing_RU_(242+484)_TX_CH_42_Horizontal_Peak

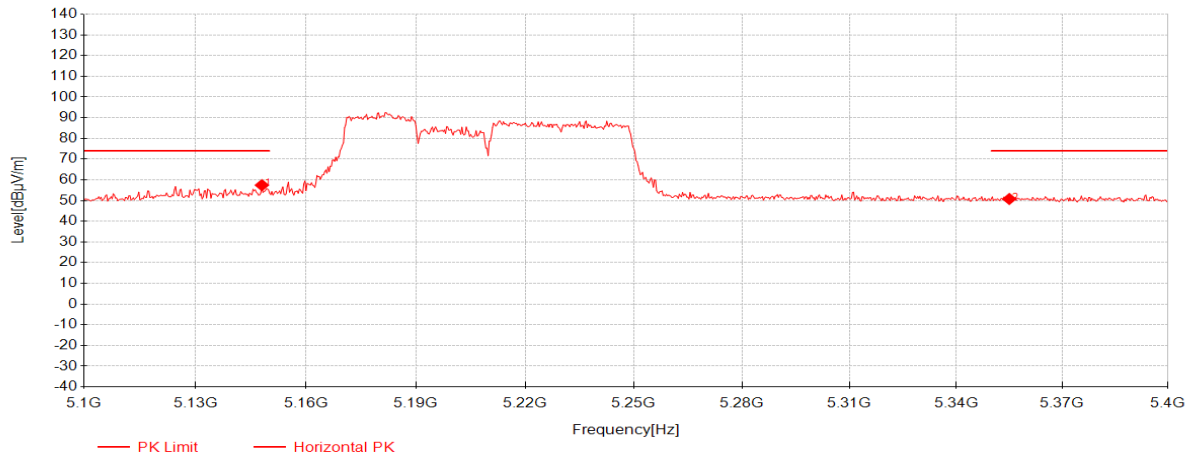

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148	42.55	33.07	-18.19	57.43	74.00	16.57	Horizontal
2	5355	35.48	33.03	-17.76	50.75	74.00	23.25	Horizontal


11be(EHT80)_Puncturing_RU_(242+484)_TX_CH_42_Horizontal_Average

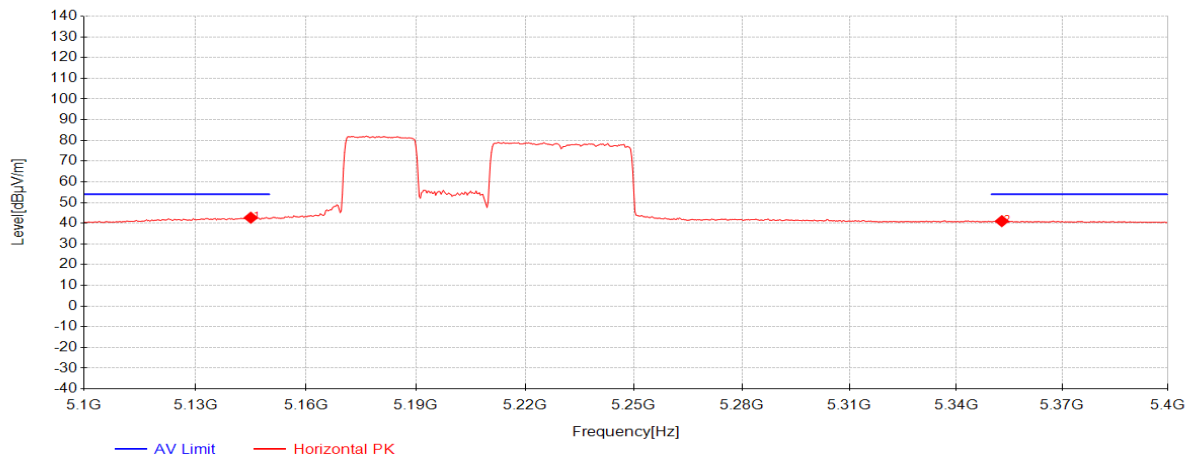

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5145	27.80	33.07	-18.20	42.68	54.00	11.32	Horizontal
2	5352.9	25.73	33.03	-17.75	41.01	54.00	12.99	Horizontal




11be(EHT80)_Puncturing_RU_(242+484)_TX_CH_42_Veritical_Peak

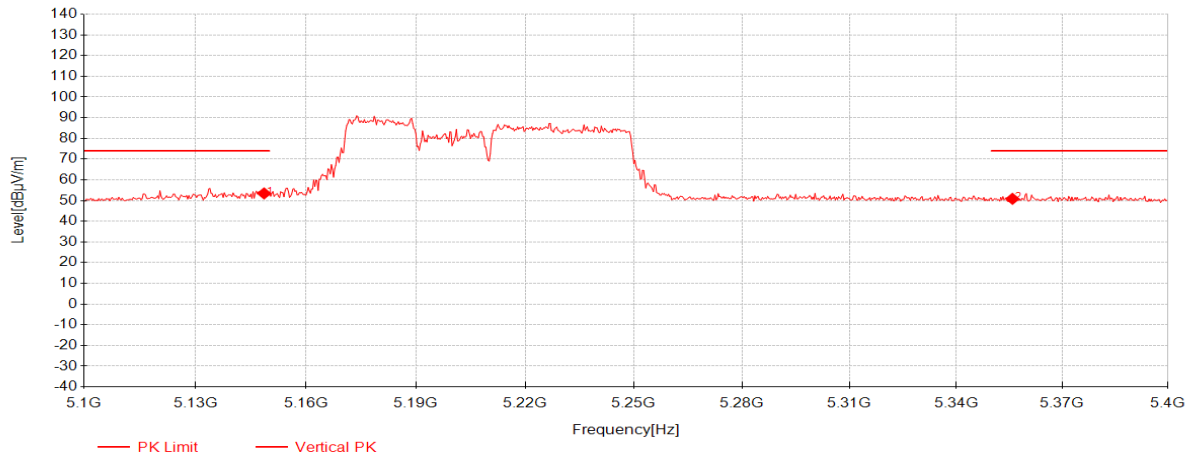


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.6	38.54	33.07	-18.18	53.43	74.00	20.57	Vertical
2	5355.9	35.56	33.03	-17.76	50.83	74.00	23.17	Vertical

11be(EHT80)_Puncturing_RU_(242+484)_TX_CH_42_Veritical_Average

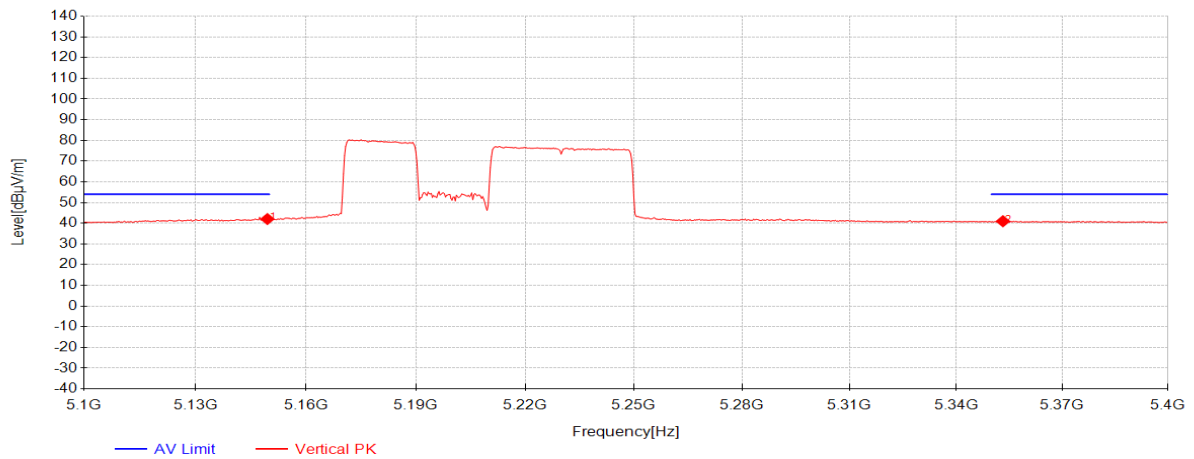


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5149.5	27.15	33.07	-18.18	42.04	54.00	11.96	Vertical
2	5353.2	25.70	33.03	-17.75	40.97	54.00	13.03	Vertical

11be(EHT80)_Puncturing_RU_(242+484)_TX_CH_58_Horizontal_Peak

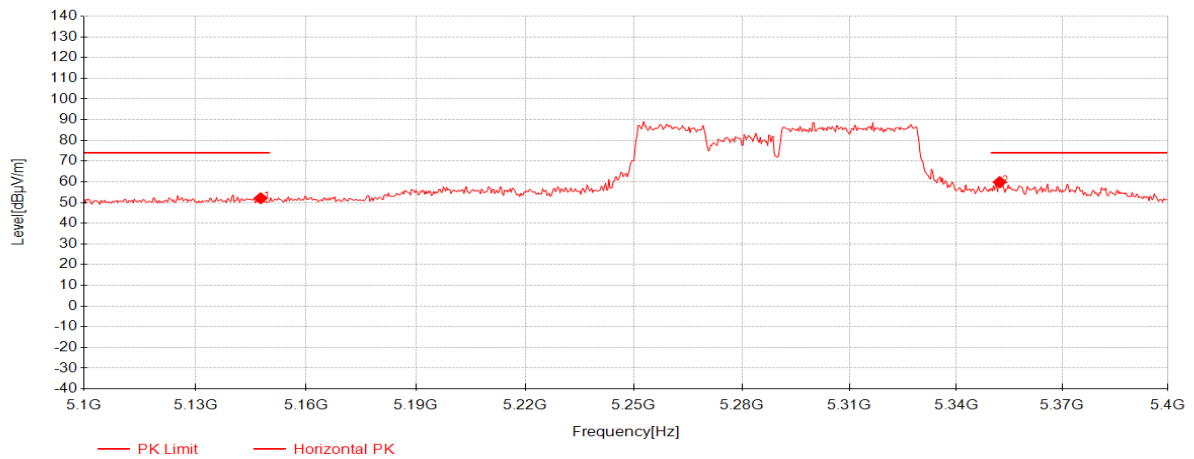


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5147.7	37.21	33.07	-18.19	52.09	74.00	21.91	Horizontal
2	5352.3	44.61	33.03	-17.75	59.89	74.00	14.11	Horizontal

11be(EHT80)_Puncturing_RU_(242+484)_TX_CH_58_Horizontal_Average

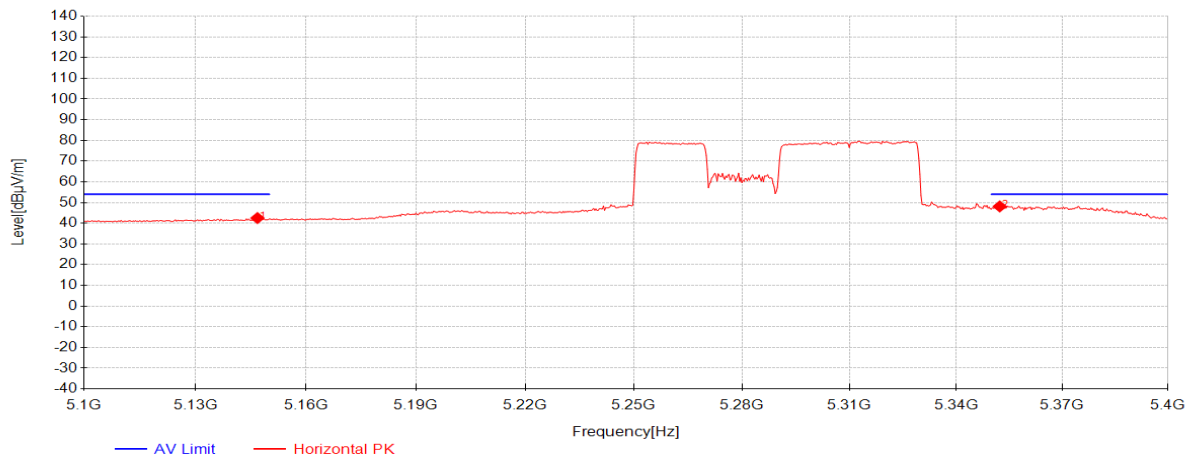


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5146.8	27.63	33.07	-18.19	42.51	54.00	11.49	Horizontal
2	5352.3	32.85	33.03	-17.75	48.13	54.00	5.87	Horizontal

11be(EHT80)_Puncturing_RU_(242+484)_TX_CH_58_Veritical_Peak

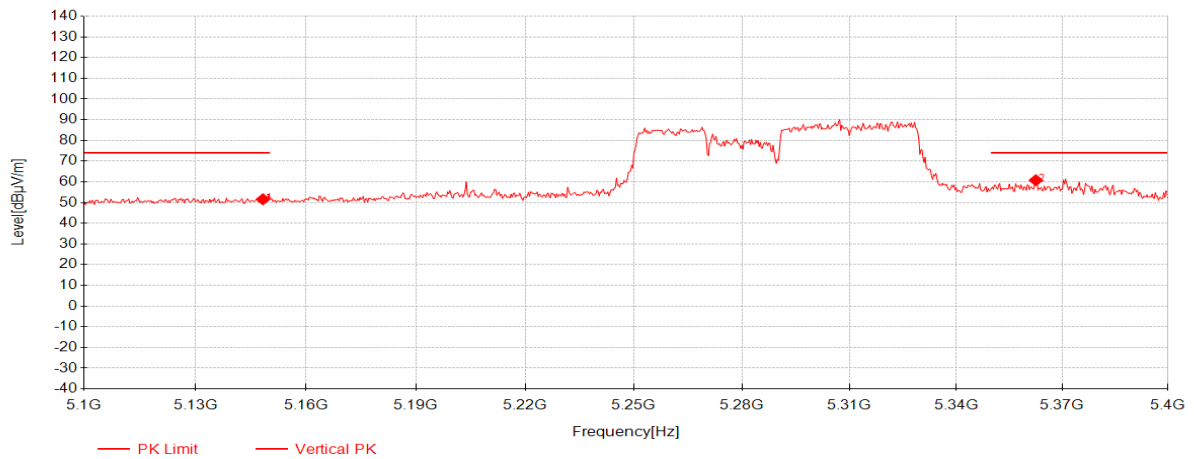


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.3	36.69	33.07	-18.19	51.58	74.00	22.42	Vertical
2	5362.5	45.50	33.03	-17.77	60.76	74.00	13.24	Vertical

11be(EHT80)_Puncturing_RU_(242+484)_TX_CH_58_Vertival_Average

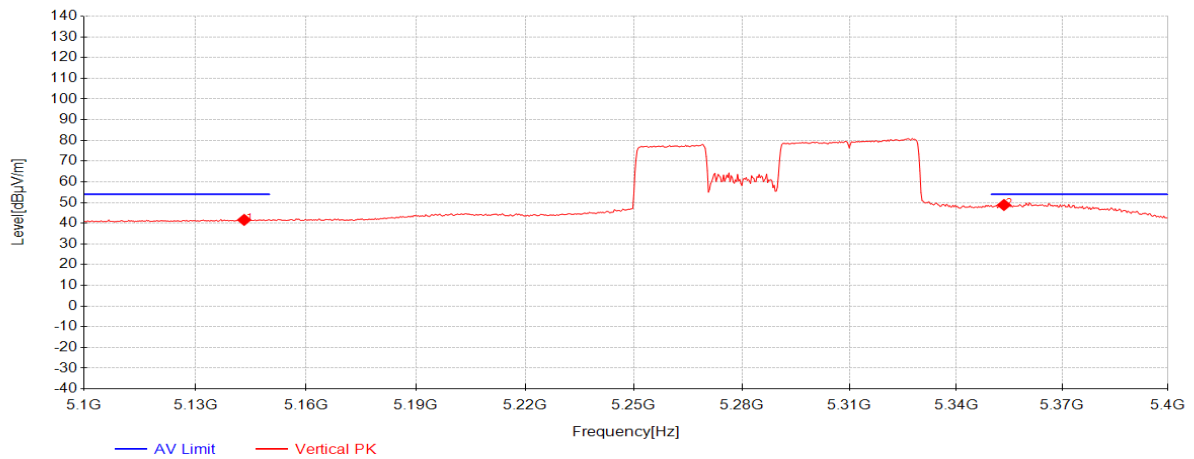


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5143.2	26.74	33.07	-18.20	41.61	54.00	12.39	Vertical
2	5353.5	33.55	33.03	-17.75	48.82	54.00	5.18	Vertical

11be(EHT80)_Puncturing_RU_(242+484)_TX_CH_106_Horizontal_Peak

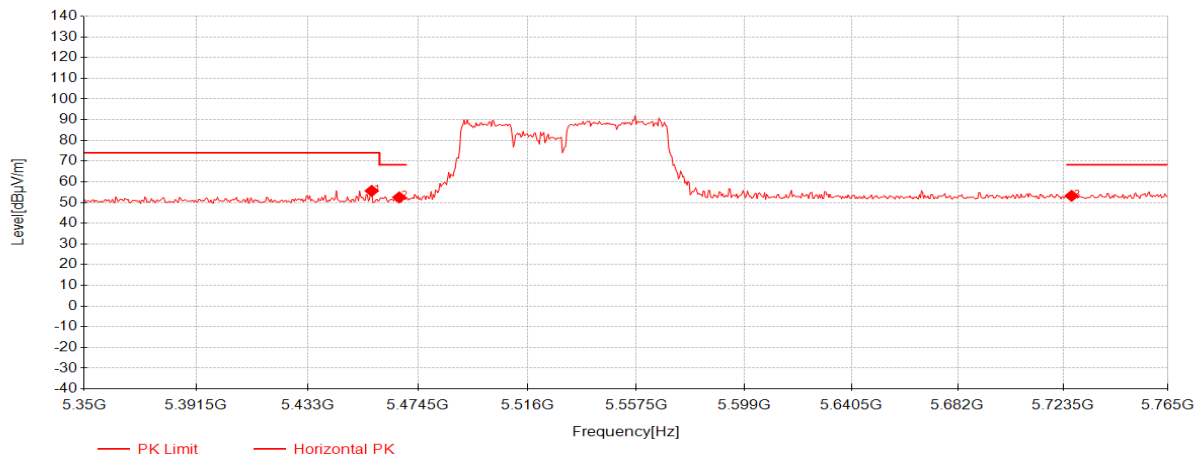


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5457.07	40.26	33.01	-17.65	55.62	74.00	18.38	Horizontal
2	5467.445	37.11	33.01	-17.62	52.50	68.20	15.70	Horizontal
3	5726.82	36.81	33.68	-17.25	53.24	68.20	14.96	Horizontal

11be(EHT80)_Puncturing_RU_(242+484)_TX_CH_106_Horizontal_Average

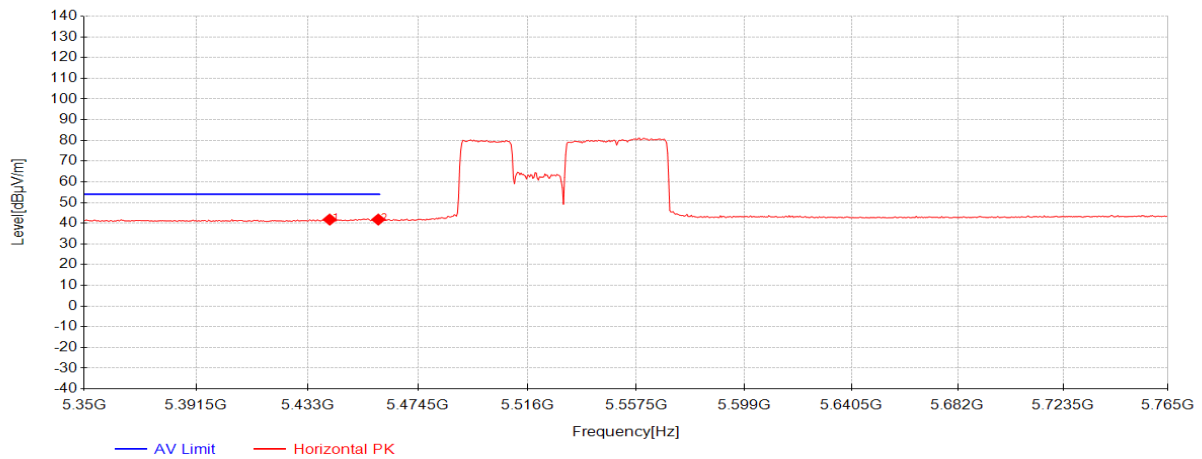


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5441.3	26.44	33.01	-17.70	41.76	54.00	12.24	Horizontal
2	5459.56	26.40	33.01	-17.64	41.77	54.00	12.23	Horizontal

11be(EHT80)_Puncturing_RU_(242+484)_TX_CH_106_Vertical_Peak

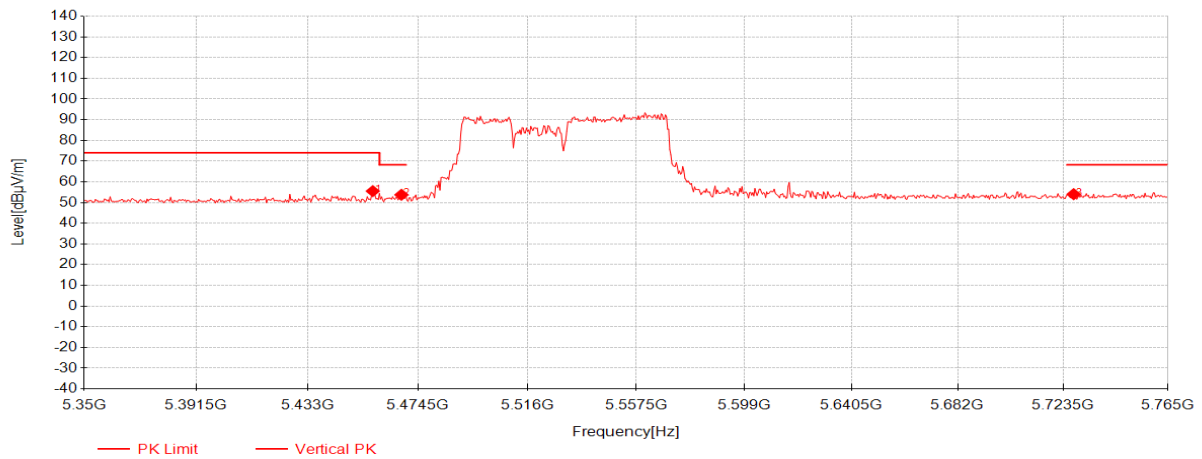


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5457.485	40.16	33.01	-17.65	55.52	74.00	18.48	Vertical
2	5468.275	38.37	33.01	-17.62	53.76	68.20	14.44	Vertical
3	5727.65	37.61	33.68	-17.24	54.05	68.20	14.15	Vertical

11be(EHT80)_Puncturing_RU_(242+484)_TX_CH_106_Vertical_Average

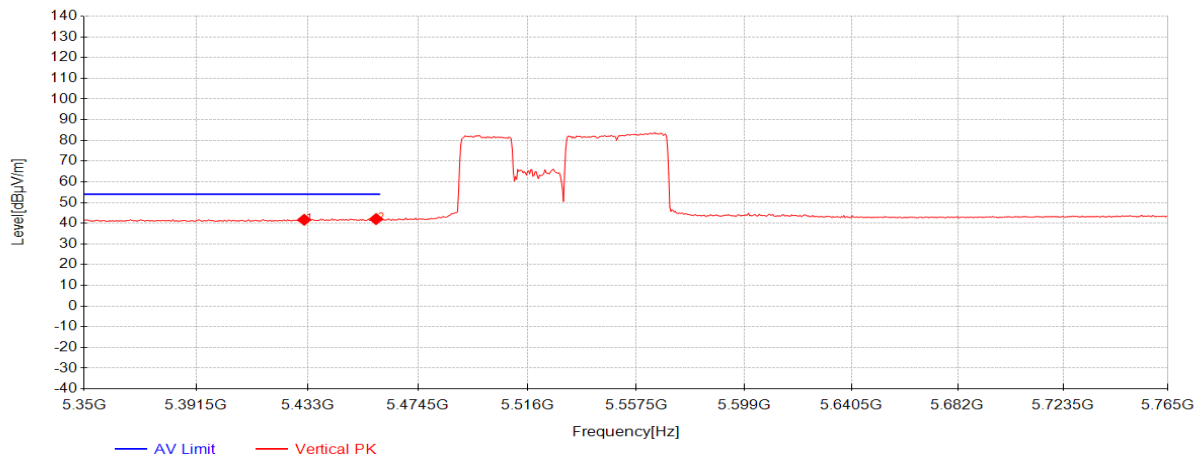


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5431.755	26.38	33.01	-17.72	41.67	54.00	12.33	Vertical
2	5458.73	26.66	33.01	-17.64	42.02	54.00	11.98	Vertical

11be(EHT80)_Puncturing_RU_(242+484)_TX_CH_155_Horizontal_Peak

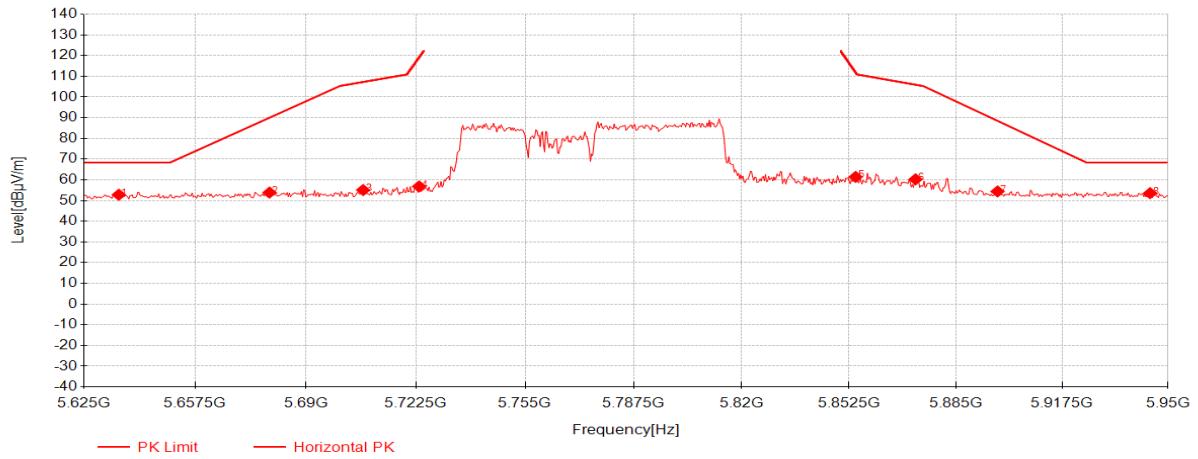


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5635.075	36.66	33.41	-17.27	52.80	68.30	15.50	Horizontal
2	5679.275	37.63	33.54	-17.31	53.86	90.00	36.14	Horizontal
3	5706.9	38.76	33.62	-17.31	55.07	107.23	52.16	Horizontal
4	5723.475	40.41	33.67	-17.26	56.82	118.82	62.00	Horizontal
5	5854.45	44.26	34.06	-16.91	61.42	112.15	50.73	Horizontal
6	5872.65	42.99	34.12	-16.87	60.24	105.96	45.72	Horizontal
7	5897.675	37.03	34.19	-16.81	54.41	88.48	34.07	Horizontal
8	5944.475	36.18	34.33	-16.95	53.57	68.30	14.73	Horizontal

11be(EHT80)_Puncturing_RU_(242+484)_TX_CH_155_Verical_Peak

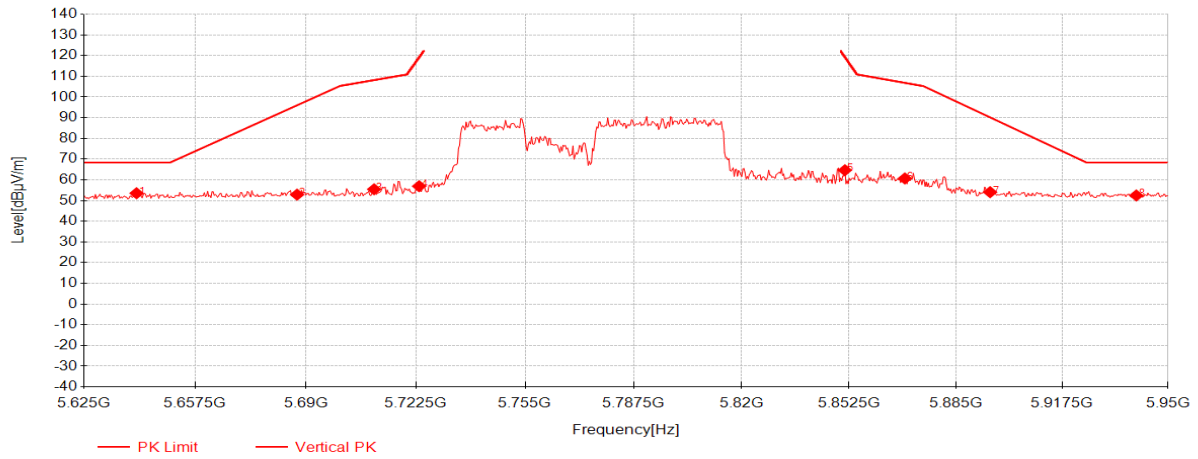


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5640.275	37.37	33.42	-17.27	53.52	68.30	14.78	Vertical
2	5687.4	36.61	33.56	-17.32	52.85	96.01	43.16	Vertical
3	5710.15	39.10	33.63	-17.30	55.43	108.14	52.71	Vertical
4	5723.475	40.51	33.67	-17.26	56.92	118.82	61.90	Vertical
5	5851.2	47.51	34.05	-16.91	64.65	119.56	54.91	Vertical
6	5869.4	43.44	34.11	-16.87	60.67	106.87	46.20	Vertical
7	5895.4	36.67	34.19	-16.82	54.04	90.17	36.13	Vertical
8	5940.25	35.06	34.32	-16.93	52.45	68.30	15.85	Vertical

11be(EHT160)_Puncturing_RU_(996+484)_TX_CH_50_Horizontal_Peak

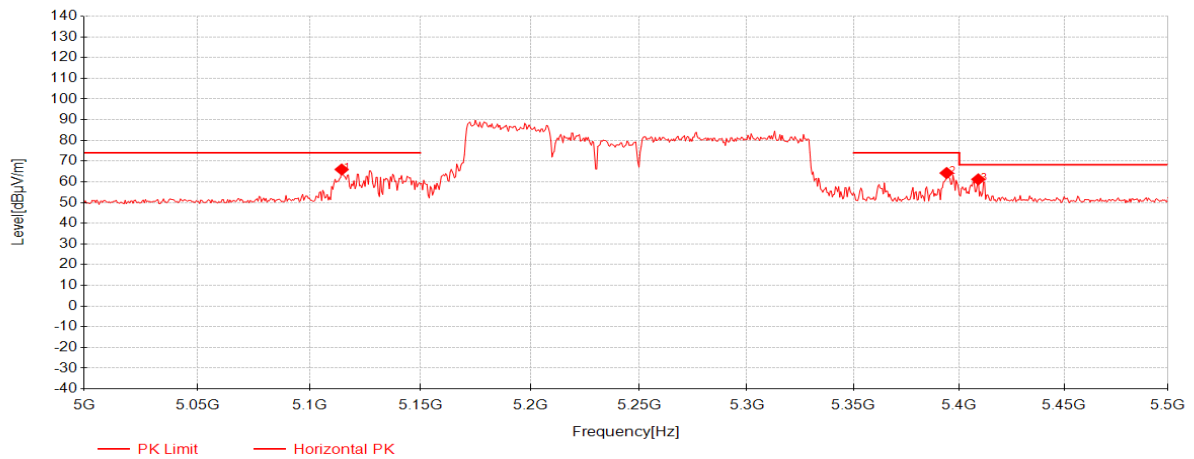


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5114.5	51.17	33.08	-18.29	65.96	74.00	8.04	Horizontal
2	5394	49.05	33.02	-17.81	64.26	74.00	9.74	Horizontal
3	5409	45.98	33.02	-17.79	61.21	68.20	6.99	Horizontal

11be(EHT160)_Puncturing_RU_(996+484)_TX_CH_50_Horizontal_Average

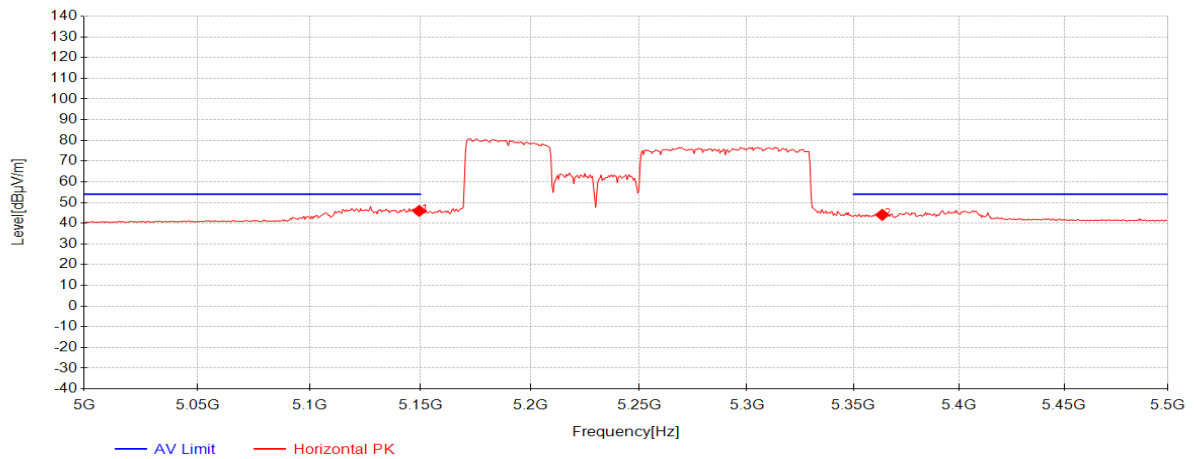

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5149.5	31.07	33.07	-18.18	45.96	54.00	8.04	Horizontal
2	5363.5	28.78	33.03	-17.77	44.04	54.00	9.96	Horizontal


11be(EHT160)_Puncturing_RU_(996+484)_TX_CH_50_Vertical_Peak

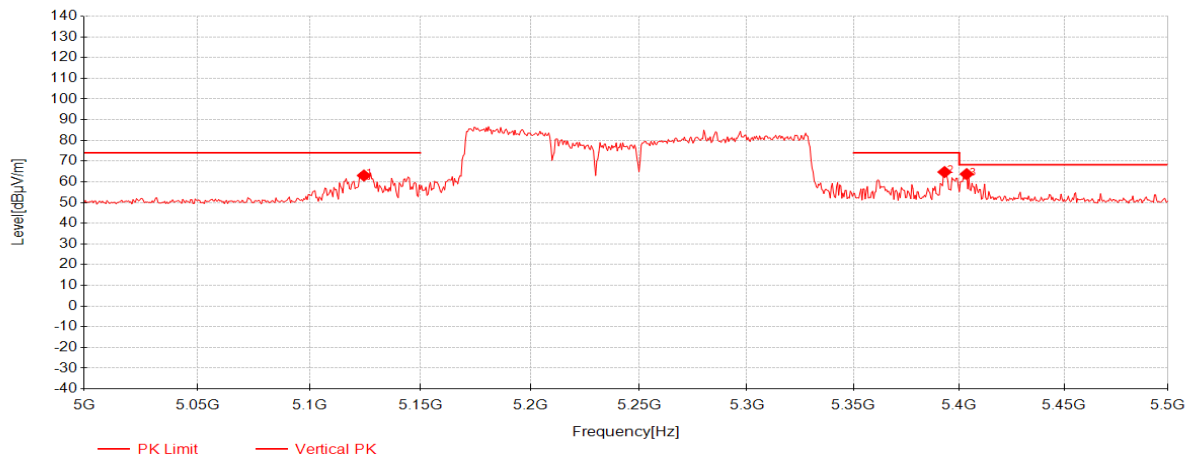

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5124.5	48.23	33.08	-18.26	63.05	74.00	10.95	Vertical
2	5393	49.51	33.02	-17.81	64.72	74.00	9.28	Vertical
3	5403.5	48.56	33.02	-17.81	63.77	68.20	4.43	Vertical




11be(EHT160)_Puncturing_RU_(996+484)_TX_CH_50_Vetical_Average

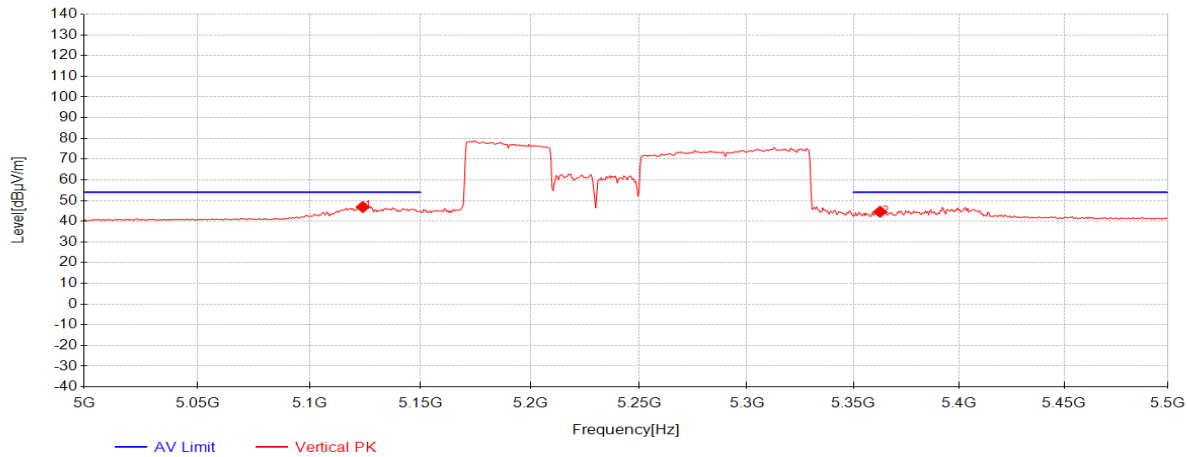


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5124	32.06	33.08	-18.26	46.88	54.00	7.12	Vertical
2	5362.5	29.31	33.03	-17.77	44.57	54.00	9.43	Vertical

11be(EHT160)_Puncturing_RU_(996+484)_TX_CH_114_Horizontal_Peak

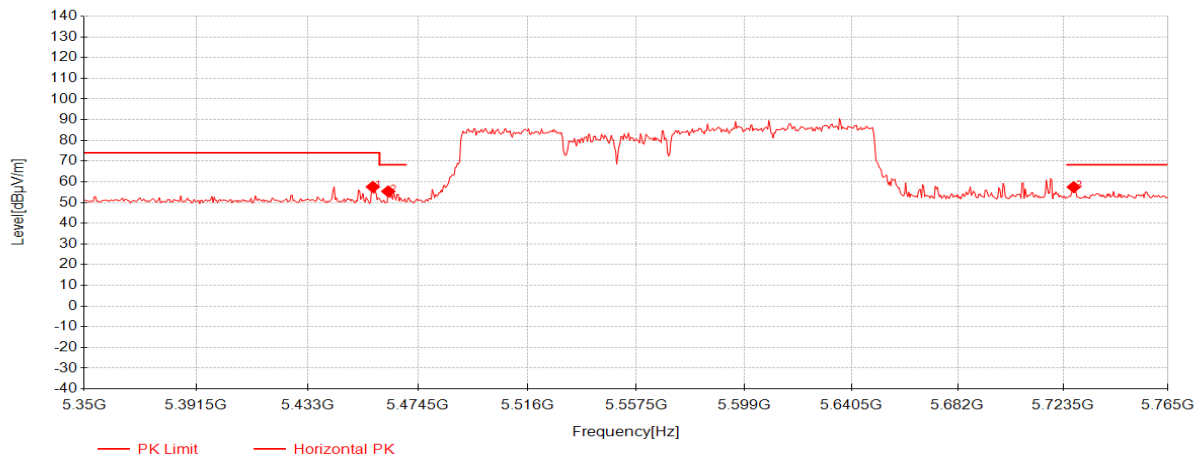


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5457.485	42.21	33.01	-17.65	57.57	74.00	16.43	Horizontal
2	5463.295	40.03	33.01	-17.63	55.41	68.20	12.79	Horizontal
3	5727.65	41.04	33.68	-17.24	57.48	68.20	10.72	Horizontal

11be(EHT160)_Puncturing_RU_(996+484)_TX_CH_114_Horizontal_Average

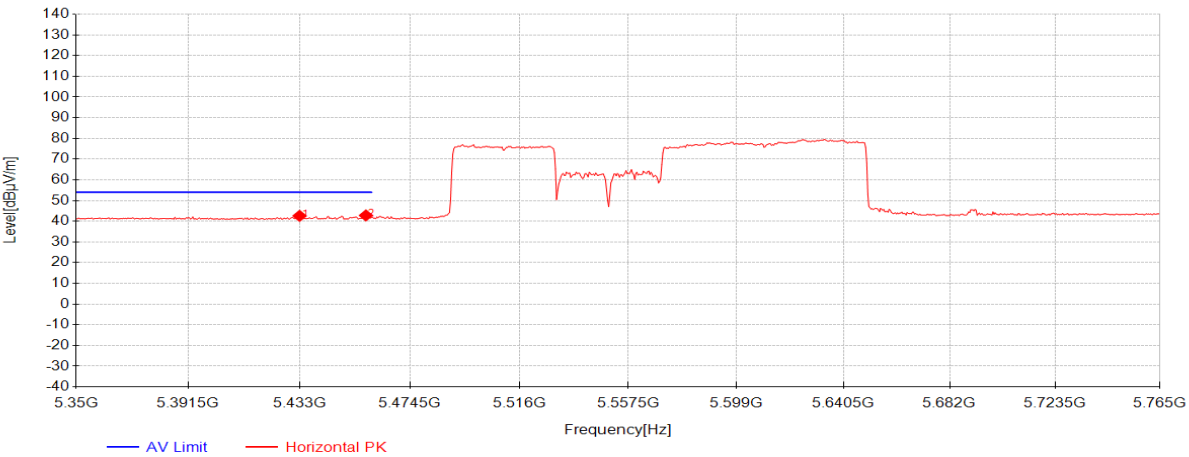


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5433	27.29	33.01	-17.72	42.58	54.00	11.42	Horizontal
2	5457.9	27.44	33.01	-17.65	42.80	54.00	11.20	Horizontal

11be(EHT160)_Puncturing_RU_(996+484)_TX_CH_114_Veritical_Peak

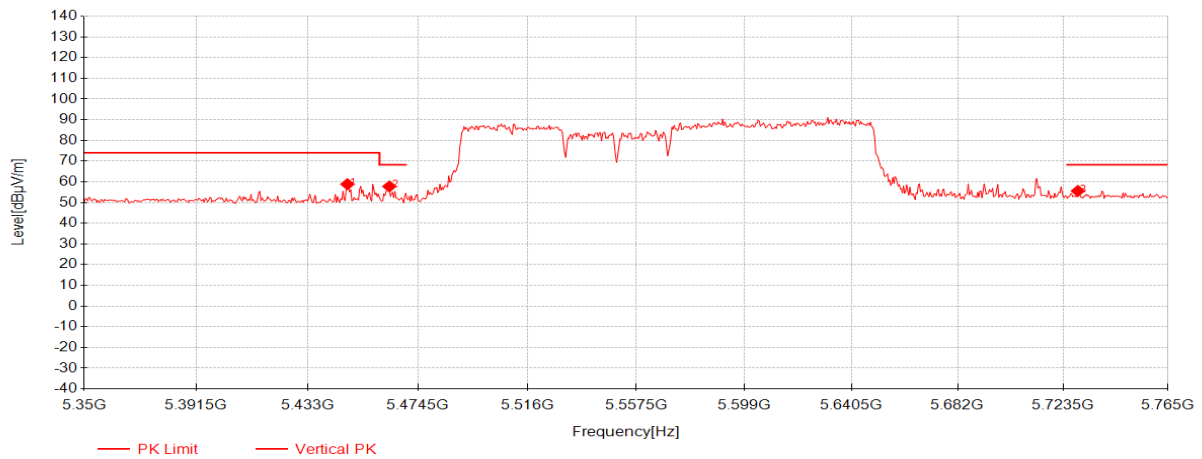

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5447.94	43.54	33.01	-17.68	58.87	74.00	15.13	Vertical
2	5463.71	42.41	33.01	-17.63	57.79	68.20	10.41	Vertical
3	5729.31	39.16	33.69	-17.24	55.61	68.20	12.59	Vertical

11be(EHT160)_Puncturing_RU_(996+484)_TX_CH_114_Vertical_Average

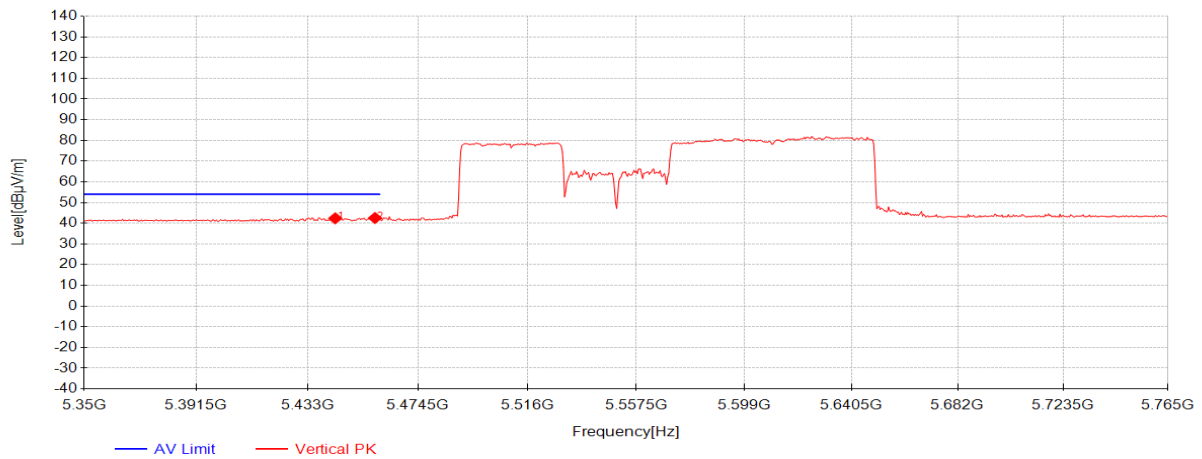

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5443.375	27.06	33.01	-17.69	42.38	54.00	11.62	Vertical
2	5458.315	27.19	33.01	-17.65	42.55	54.00	11.45	Vertical

7.5 Duty Cycle

Test Requirement ANSI C63.10 (2013) Section 12.2

Test Method: ANSI C63.10 (2020) Section 12.2

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 20.4 °C


Humidity: 52.2 % RH

Atmospheric Pressure: 1001 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	02	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	03	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

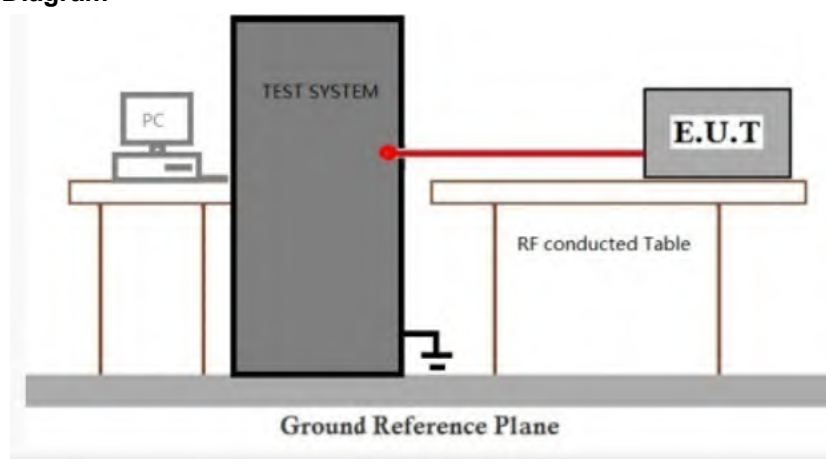

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.6 99% Bandwidth

Test Requirement ANSI C63.10 (2013) Section 12.4.2

Test Method: ANSI C63.10 (2020) Section 12.5.3

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 20.4 °C


Humidity: 52.2 % RH

Atmospheric Pressure: 1001 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	02	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	03	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.

7.6.3 Test Setup Diagram

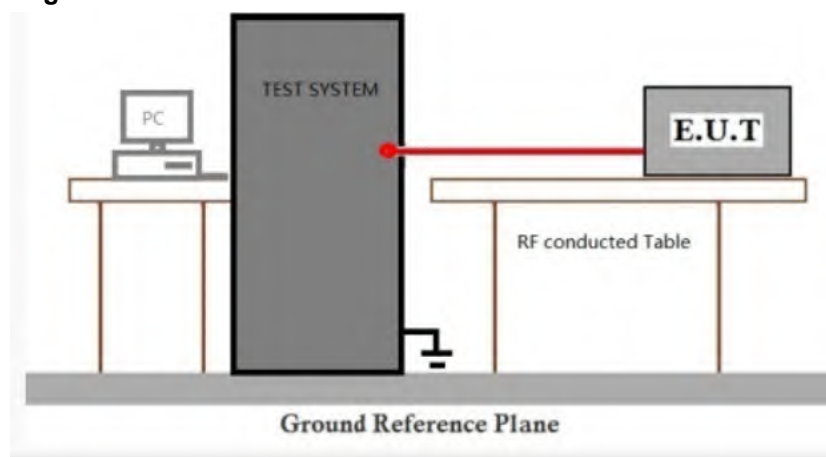

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 26dB Emission bandwidth

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2020) Section 12.5.2

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 20.4 °C


Humidity: 52.2 % RH

Atmospheric Pressure: 1001 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	02	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	03	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

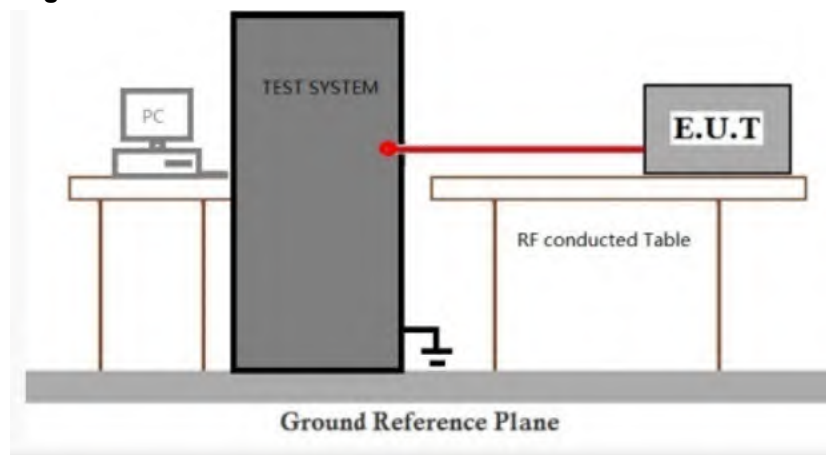

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 Minimum 6 dB bandwidth (5.725-5.85 GHz band)

Test Requirement 47 CFR Part 15, Subpart E 15.407 (e)

Test Method: ANSI C63.10 (2020) Section 12.5.1

Limit:

Frequency band(MHz)	Limit
5725-5850	≥ 500 kHz

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 20.4 °C


Humidity: 52.2 % RH

Atmospheric Pressure: 1001 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.

7.8.3 Test Setup Diagram

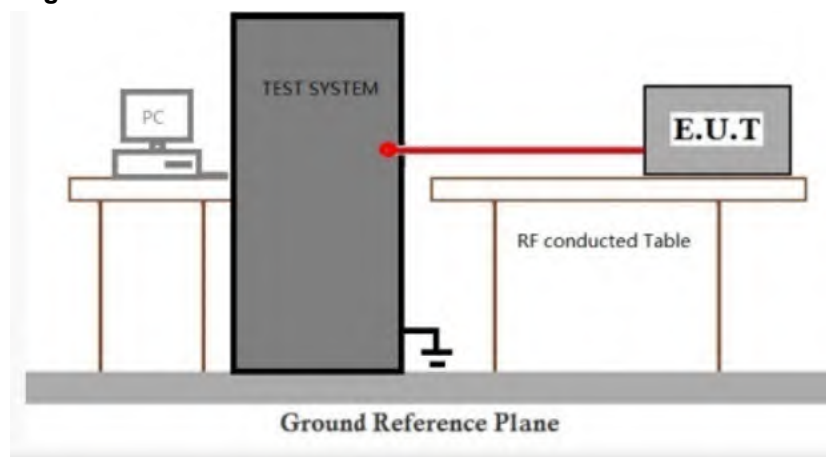

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.9 Maximum Conducted output power

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2020) Section 12.4

Limit:

Frequency band(MHz)	Limit
5150-5250	$\leq 1\text{W}(30\text{dBm})$ for master device
	$\leq 250\text{mW}(24\text{dBm})$ for client device
5250-5350	$\leq 250\text{mW}(24\text{dBm})$ or $11\text{dBm}+10\log B^*$
5470-5725	$\leq 250\text{mW}(24\text{dBm})$ or $11\text{dBm}+10\log B^*$
5725-5850	$\leq 1\text{W}(30\text{dBm})$
Remark:	* Where B is the 26dB emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 20.4 °C


Humidity: 52.2 % RH

Atmospheric Pressure: 1001 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	02	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	03	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.

7.9.3 Test Setup Diagram

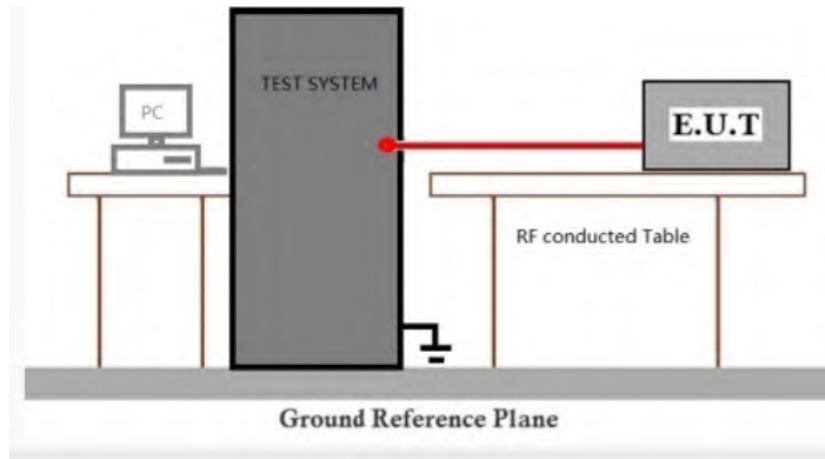

7.9.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

AV Output power Level = Reading level + Cable loss + DCCF

Please Refer to Appendix for Details



7.10 Peak Power spectrum density

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10 (2020) Section 12.6

Limit:

Frequency band(MHz)	Limit
5150-5250	≤17dBm in 1MHz for master device
	≤11dBm in 1MHz for client device
5250-5350	≤11dBm in 1MHz for client device
5470-5725	≤11dBm in 1MHz for client device
5725-5850	≤30dBm in 500 kHz
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.

7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 20.4 °C


Humidity: 52.2 % RH

Atmospheric Pressure: 1001 mbar

7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	02	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	03	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.

7.10.3 Test Setup Diagram

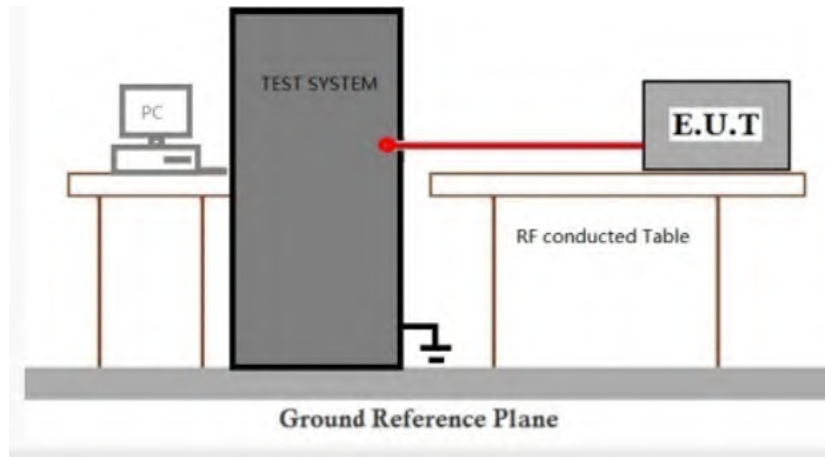

7.10.4 Measurement Procedure and Data

RBW conversion factor from 300kHz to 500kHz (2.22dB) for UNII Band 3 has been considered.

Please Refer to Appendix for Details



7.11 Non-occupancy period

Test Requirement KDB 905462 D02 Section 5.1

Test Method: KDB 905462 D02 Section 7.8.3

Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

7.11.1 E.U.T. Operation

Operating Environment:

Temperature: 20.4 °C


Humidity: 52.2 % RH

Atmospheric Pressure: 1001 mbar

7.11.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	Normal operating_Keep the EUT communication with the companion device.

7.11.3 Test Setup Diagram

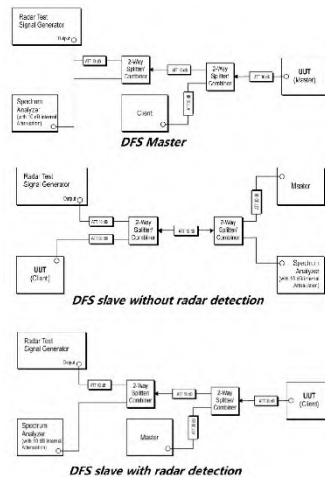

7.11.4 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer to Appendix for Details



7.12 Channel Availability Check Time

Test Requirement KDB 905462 D02 Section 5.1
Test Method: KDB 905462 D02 Section 7.8.2

Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

7.12.1 E.U.T. Operation


Operating Environment:

Temperature: 20.4 °C Humidity: 52.2 % RH Atmospheric Pressure: 1001 mbar

7.12.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	Normal operating_Keep the EUT communication with the companion device.

7.12.3 Test Setup Diagram

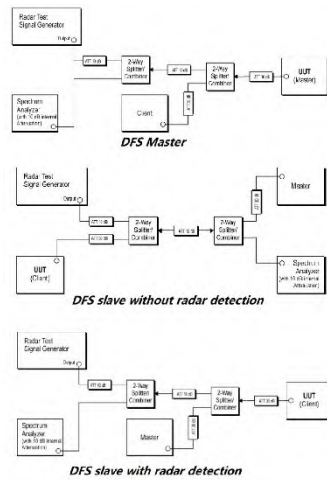

7.12.4 Measurement Procedure and Data

1) Initial Channel Availability Check Time

The Initial Channel Availability Check Time tests that the UUT does not emit beacon, control, or data signals on the test Channel until the power-up sequence has been completed and the U-NII device checks for Radar Waveforms for one minute on the test Channel. This test does not use any Radar Waveforms and only needs to be performed one time.

- a) The U-NII devices will be powered on and be instructed to operate on the appropriate U-NII Channel that must incorporate DFS functions. At the same time the UUT is powered on, the spectrum analyzer will be set to zero span mode with a 3 MHz RBW and 3 MHz VBW on the Channel occupied by the radar (Chr) with a 2.5 minute sweep time. The spectrum analyzer's sweep will be started at the same time power is applied to the U-NII device.
- b) The UUT should not transmit any beacon or data transmissions until at least 1 minute after the completion of the power-on cycle.
- c) Confirm that the UUT initiates transmission on the channel

This measurement can be used to determine the length of the power-on cycle if it is not supplied by the manufacturer. If the spectrum analyzer sweep is started at the same time the UUT is powered on and the UUT does not begin transmissions until it has completed the cycle, the power-on time can be determined by comparing the two times.

2) Radar Burst at the Beginning of the Channel Availability Check Time

The steps below define the procedure to verify successful radar detection on the test Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB occurs at the beginning of the Channel Availability Check Time.

- a) The Radar Waveform generator and UUT are connected using the applicable test setup described in the sections on configuration for Conducted Tests or Radiated Tests and the power of the UUT is switched off.
- b) The UUT is powered on at T0. T1 denotes the instant when the UUT has completed its power-up sequence (T_{power_up}). The Channel Availability Check Time commences on Chr at instant T1 and will end no sooner than T1 + T_{ch_avail_check}.
- c) A single Burst of one of the Short Pulse Radar Types 0-4 will commence within a 6 second window starting at T1. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
- d) Visual indication or measured results on the UUT of successful detection of the radar Burst will be recorded and reported. Observation of Chr for UUT emissions will continue for 2.5 minutes after the radar Burst has been generated.
- e) Verify that during the 2.5 minute measurement window no UUT transmissions occurred on Chr. The Channel Availability Check results will be recorded.

3) Radar Burst at the End of the Channel Availability Check Time

The steps below define the procedure to verify successful radar detection on the test Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1dB occurs at the end of the Channel Availability Check Time.

- a) The Radar Waveform generator and UUT are connected using the applicable test setup described in the sections for Conducted Tests (7.2) or Radiated Tests (7.3) and the power of the UUT is switched off.
- b) The UUT is powered on at T0. T1 denotes the instant when the UUT has completed its power-up sequence (T_{power_up}). The Channel Availability Check Time commences on Chr at instant T1 and will end no sooner than T1 + T_{ch_avail_check}.
- c) A single Burst of one of the Short Pulse Radar Types 0-4 will commence within a 6 second window starting at T1 + 54 seconds. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
- d) Visual indication or measured results on the UUT of successful detection of the radar Burst will be recorded and reported. Observation of Chr for UUT emissions will continue for 2.5 minutes after the radar Burst has been generated.
- e) Verify that during the 2.5 minute measurement window no UUT transmissions occurred on Chr. The Channel Availability Check results will be recorded.

Please Refer to Appendix for Details



Report No.: SUCR251000101103

Page: 275 of 580

7.13 Channel Move Time

Test Requirement KDB 905462 D02 Section 5.1
Test Method: KDB 905462 D02 Section 7.8.3

Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

7.13.1 E.U.T. Operation


Operating Environment:

Temperature: 20.4 °C Humidity: 52.2 % RH Atmospheric Pressure: 1001 mbar

7.13.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	Normal operating_Keep the EUT communication with the companion device.

7.13.3 Test Setup Diagram

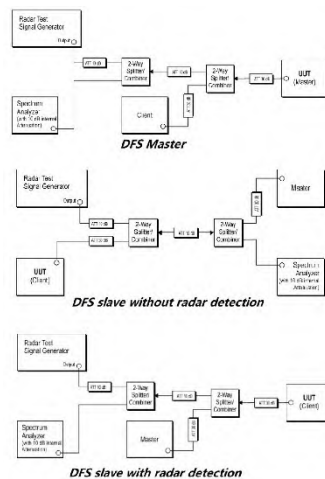

7.13.4 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell(0.3ms) = S(12000ms) / B(4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C(ms) = N \times Dwell(0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer to Appendix for Details

7.14 Channel Closing Transmission Time

Test Requirement KDB 905462 D02 Section 5.1
Test Method: KDB 905462 D02 Section 7.8.3

Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

7.14.1 E.U.T. Operation


Operating Environment:

Temperature: 20.4 °C Humidity: 52.2 % RH Atmospheric Pressure: 1001 mbar

7.14.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	Normal operating_Keep the EUT communication with the companion device.

7.14.3 Test Setup Diagram

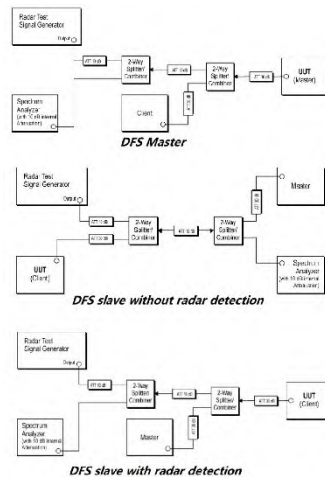

7.14.4 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell(0.3ms) = S(12000ms) / B(4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C(ms) = N \times Dwell(0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer to Appendix for Details



7.15 U-NII Detection Bandwidth

Test Requirement KDB 905462 D02 Section 5.1
Test Method: KDB 905462 D02 Section 7.8.1

Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.			

7.15.1 E.U.T. Operation


Operating Environment:

Temperature: 20.4 °C Humidity: 52.2 % RH Atmospheric Pressure: 1001 mbar

7.15.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	Normal operating_Keep the EUT communication with the companion device.

7.15.3 Test Setup Diagram

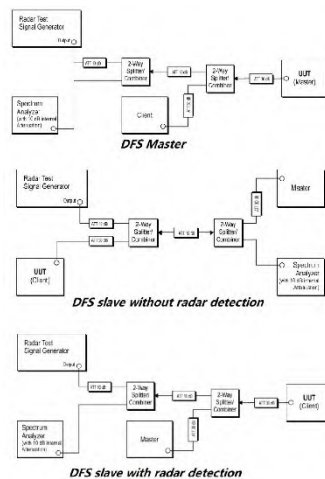

7.15.4 Measurement Procedure and Data

1. Set up the DFS timing monitoring equipment and Set up the overall system for either radiated or conducted coupling to the UUT.

Adjust the equipment to produce a single Burst of any one of the Short Pulse Radar Types 0 - 4 at the center frequency of the UUT Operating Channel at the specified DFS Detection Threshold level.

Set the UUT up as a standalone device (no associated Client or Master, as appropriate) and no traffic. Frame based systems will be set to a talk/listen ratio reflecting the worst case (maximum) that is user configurable during this test.

2. Generate a single radar Burst, and note the response of the UUT. Repeat for a minimum of 10 trials. The UUT must detect the Radar Waveform within the DFS band using the specified U-NII Detection Bandwidth criterion.

3. Starting at the center frequency of the UUT operating Channel, increase the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the U-NII Detection Bandwidth criterion. Repeat this measurement in 1MHz steps at frequencies 5 MHz below where the detection rate begins to fall. Record the highest frequency (denote as FH) at which detection is greater than or equal to the U-NII Detection Bandwidth criterion. Recording the detection rate at frequencies above FH is not required to demonstrate compliance.

4. Starting at the center frequency of the UUT operating Channel, decrease the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the U-NII Detection Bandwidth criterion. Repeat this measurement in 1MHz steps at frequencies 5 MHz above where the detection rate begins to fall. Record the lowest frequency (denote as FL) at which detection is greater than or equal to the U-NII Detection Bandwidth criterion. Recording the detection rate at frequencies below FL is not required to demonstrate compliance.

5. The U-NII Detection Bandwidth is calculated as follows:

$$\text{U-NII Detection Bandwidth} = \text{FH} - \text{FL}$$

The U-NII Detection Bandwidth must meet the U-NII Detection Bandwidth criterion. Otherwise, the UUT does not comply with DFS requirements. This is essential to ensure that the UUT is capable of detecting Radar Waveforms across the same frequency spectrum that contains the significant energy from the system. In the case that the U-NII Detection Bandwidth is greater than or equal to the 99 percent power bandwidth for the measured FH and FL, the test can be truncated and the U-NII Detection Bandwidth can be reported as the measured FH and FL.

Please Refer to Appendix for Details



Report No.: SUCR251000101103

Page: 281 of 580

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for WLAN

9 EUT Constructional Details (EUT Photos)

Refer to Appendix - External Photos for SUCR2510001011MO and Appendix - Internal Photos for SUCR2510001011MO



10 Appendix

1. Duty Cycle

1.1 Test Result

1.1.1 Ant1

Ant1									
Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11a	MIMO	5180	/	/	1.978	1.993	99.25	0.03	0.00
802.11be (EHT20)	MIMO	5180	SU	/	5.452	5.644	96.60	0.15	2.39
802.11be (EHT40)	MIMO	5190	SU	/	5.452	5.469	99.69	0.01	0.03
802.11be (EHT80)	MIMO	5210	SU	/	5.456	5.634	96.84	0.14	1.93
802.11be (EHT160)	MIMO	5570	SU	/	5.452	5.644	96.60	0.15	1.89



2. Bandwidth

2.1 Test Result

2.1.1 OBW

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
						Result	Limit	
802.11a	MIMO	5180	/	/	1	17.759	/	Pass
		5200	/	/	1	17.705	/	Pass
		5240	/	/	1	17.711	/	Pass
		5260	/	/	1	17.619	/	Pass
		5300	/	/	1	17.539	/	Pass
		5320	/	/	1	17.556	/	Pass
		5500	/	/	1	17.517	/	Pass
		5580	/	/	1	17.571	/	Pass
		5700	/	/	1	17.577	/	Pass
		5745	/	/	1	17.571	/	Pass
		5785	/	/	1	17.580	/	Pass
		5825	/	/	1	17.569	/	Pass
		5720	/	/	1	17.578	/	Pass
802.11be (EHT20)	MIMO	5180	SU	/	1	19.378	/	Pass
		5200	SU	/	1	19.397	/	Pass
		5240	SU	/	1	19.503	/	Pass
		5260	SU	/	1	19.373	/	Pass
		5300	SU	/	1	19.379	/	Pass
		5320	SU	/	1	19.382	/	Pass
		5500	SU	/	1	19.383	/	Pass
		5580	SU	/	1	19.369	/	Pass
		5700	SU	/	1	19.403	/	Pass
		5745	SU	/	1	19.309	/	Pass
		5785	SU	/	1	19.350	/	Pass
		5825	SU	/	1	19.339	/	Pass
		5720	SU	/	1	19.355	/	Pass
802.11be (EHT40)	MIMO	5190	SU	/	1	38.590	/	Pass
		5230	SU	/	1	38.601	/	Pass
		5270	SU	/	1	38.555	/	Pass
		5310	SU	/	1	38.576	/	Pass
		5510	SU	/	1	38.605	/	Pass
		5550	SU	/	1	38.479	/	Pass
		5670	SU	/	1	38.619	/	Pass
		5755	SU	/	1	38.542	/	Pass
		5795	SU	/	1	38.527	/	Pass
		5710	SU	/	1	38.520	/	Pass
		5210	SU	/	1	78.803	/	Pass
802.11be (EHT80)	MIMO	5290	SU	/	1	78.526	/	Pass
		5530	SU	/	1	78.631	/	Pass



Report No.: SUCR251000101103

Page: 284 of 580

802.11be (EHT160)	MIMO	5610	SU	/	1	78.576	/	Pass
		5775	SU	/	1	78.644	/	Pass
		5690	SU	/	1	78.854	/	Pass
		5570	SU	/	1	158.060	/	Pass
		5250	SU	/	1	157.803	/	Pass

2.1.2 26dB BW

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	26dB Bandwidth (MHz)		Verdict
						Result	Limit	
802.11a	MIMO	5180	/	/	1	24.001	/	Pass
		5200	/	/	1	23.852	/	Pass
		5240	/	/	1	23.544	/	Pass
		5260	/	/	1	22.997	/	Pass
		5300	/	/	1	22.962	/	Pass
		5320	/	/	1	22.638	/	Pass
		5500	/	/	1	23.409	/	Pass
		5580	/	/	1	23.462	/	Pass
		5700	/	/	1	22.858	/	Pass
		5720	/	/	1	23.258	/	Pass
802.11be (EHT20)	MIMO	5180	SU	/	1	22.835	/	Pass
		5200	SU	/	1	24.391	/	Pass
		5240	SU	/	1	23.674	/	Pass
		5260	SU	/	1	22.780	/	Pass
		5300	SU	/	1	23.007	/	Pass
		5320	SU	/	1	23.460	/	Pass
		5500	SU	/	1	22.925	/	Pass
		5580	SU	/	1	23.120	/	Pass
		5700	SU	/	1	22.737	/	Pass
		5720	SU	/	1	22.823	/	Pass
802.11be (EHT40)	MIMO	5190	SU	/	1	44.577	/	Pass
		5230	SU	/	1	45.523	/	Pass
		5270	SU	/	1	43.461	/	Pass
		5310	SU	/	1	44.547	/	Pass
		5510	SU	/	1	44.810	/	Pass
		5550	SU	/	1	44.397	/	Pass
		5670	SU	/	1	45.054	/	Pass
		5710	SU	/	1	44.513	/	Pass
802.11be (EHT80)	MIMO	5210	SU	/	1	93.642	/	Pass
		5290	SU	/	1	88.892	/	Pass
		5530	SU	/	1	89.024	/	Pass
		5610	SU	/	1	90.020	/	Pass
		5690	SU	/	1	90.441	/	Pass
802.11be (EHT160)	MIMO	5570	SU	/	1	174.880	/	Pass
		5250	SU	/	1	172.671	/	Pass


2.1.3 6dB BW




Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	6dB Bandwidth (MHz)		Verdict
						Result	Limit	
802.11a	MIMO	5745	/	/	1	16.420	>=0.5	Pass
		5785	/	/	1	16.398	>=0.5	Pass
		5825	/	/	1	16.406	>=0.5	Pass
802.11be (EHT20)	MIMO	5745	SU	/	1	19.068	>=0.5	Pass
		5785	SU	/	1	19.071	>=0.5	Pass
		5825	SU	/	1	19.035	>=0.5	Pass
802.11be (EHT40)	MIMO	5755	SU	/	1	38.106	>=0.5	Pass
		5795	SU	/	1	38.125	>=0.5	Pass
802.11be (EHT80)	MIMO	5775	SU	/	1	78.104	>=0.5	Pass

2.2 Test Graph


2.2.1 OBW

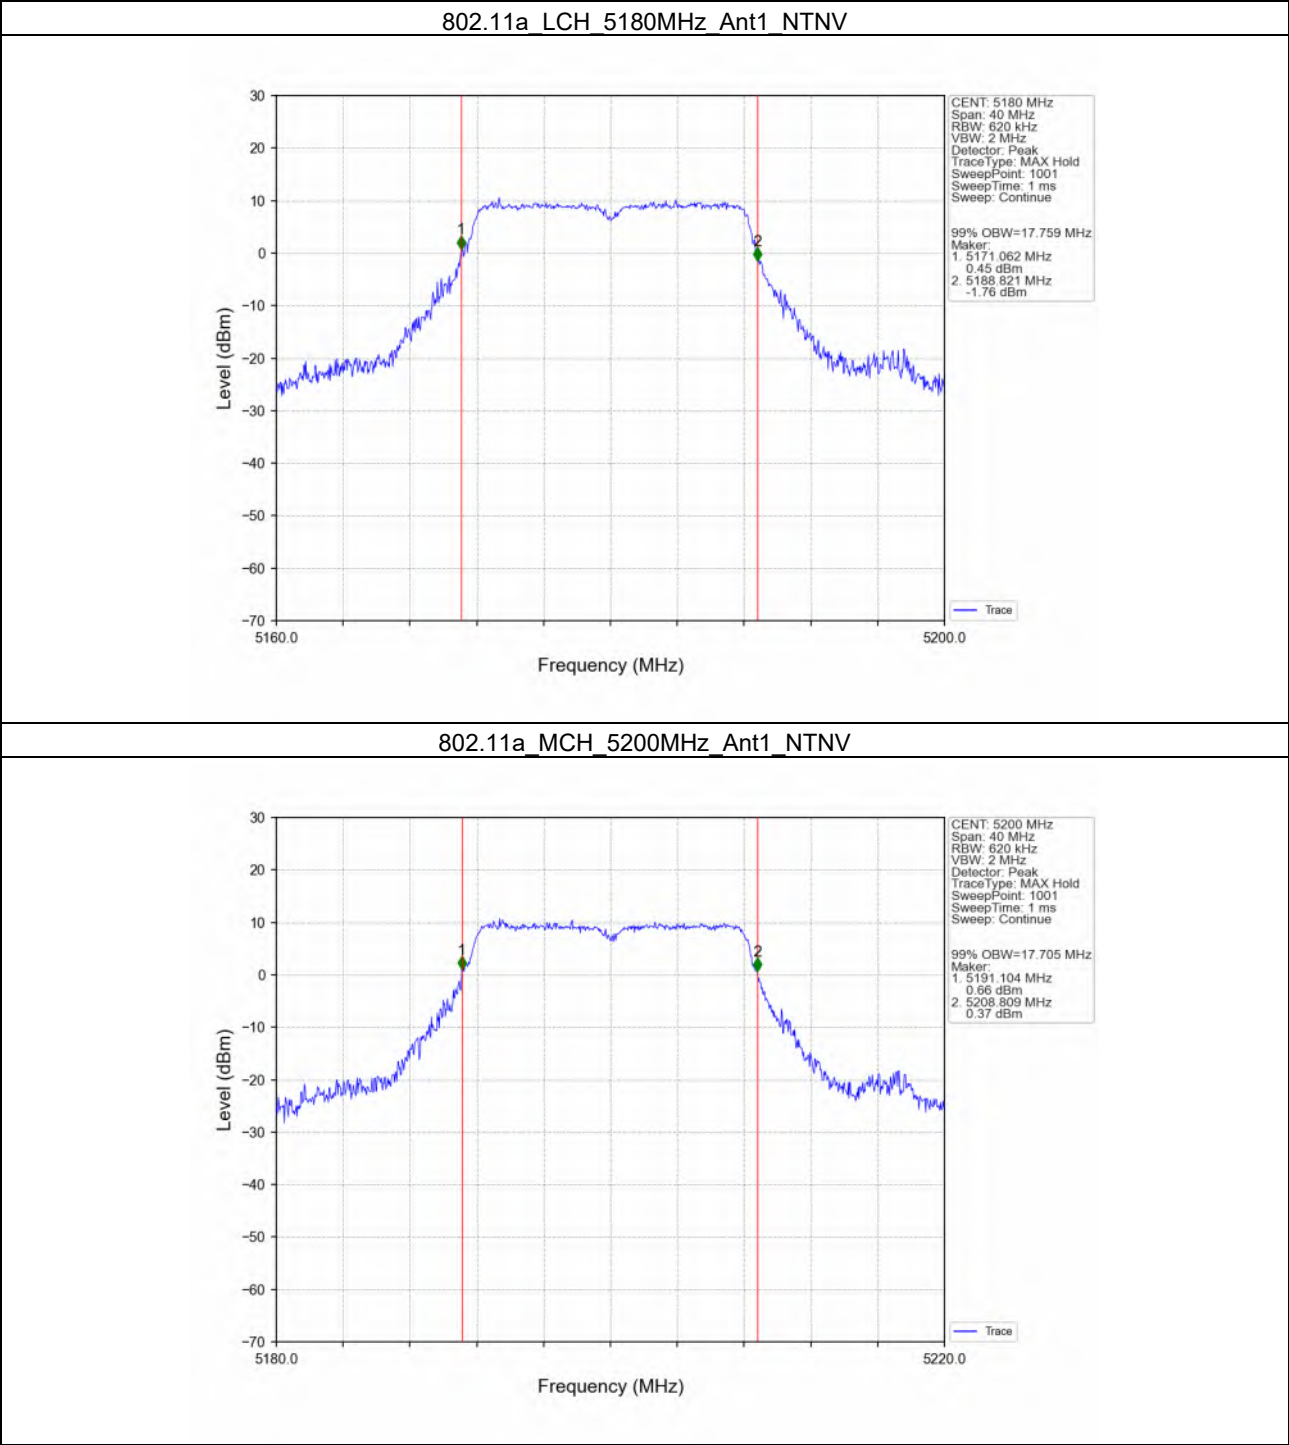


802.11a_HCH_5240MHz_Ant1_NTNV

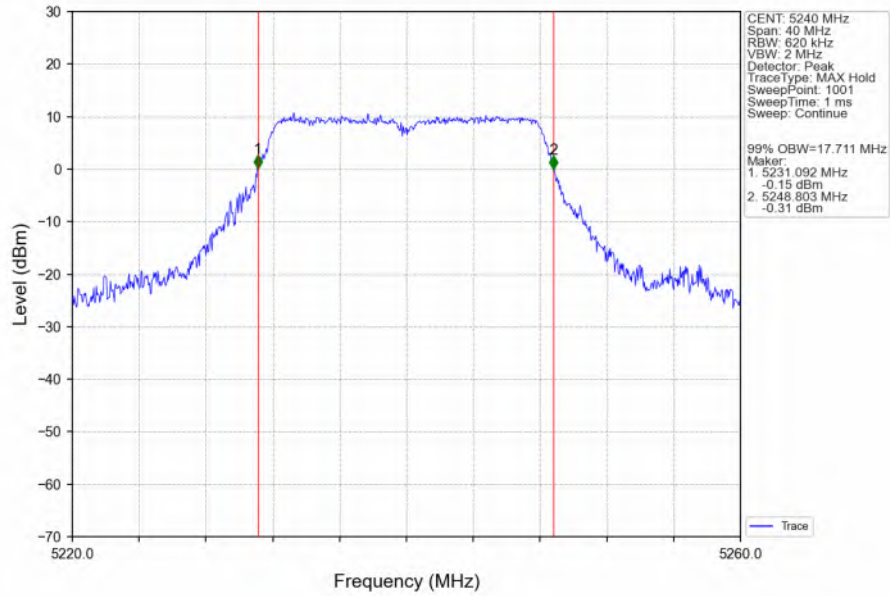


802.11a_LCH_5260MHz_Ant1_NTNV

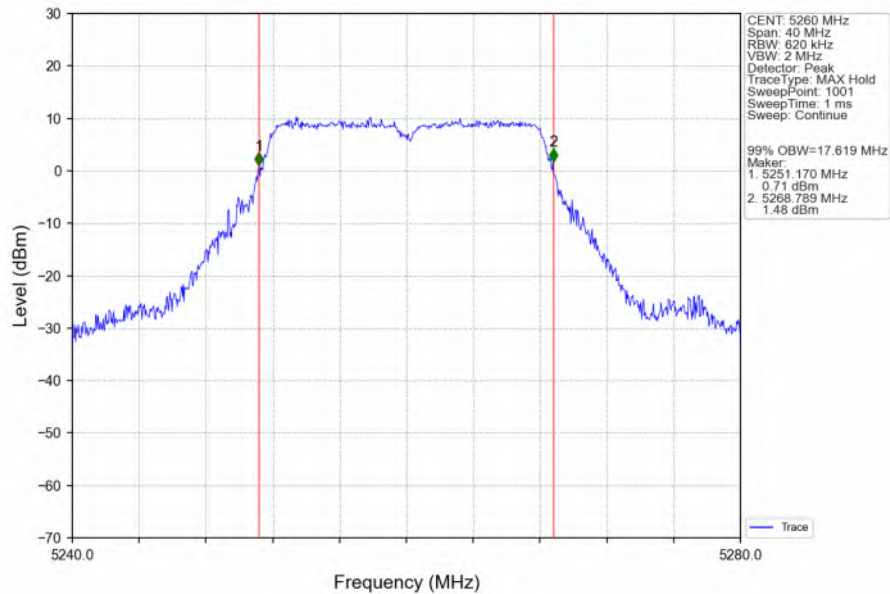


802.11a_MCH_5300MHz_Ant1_NTNV

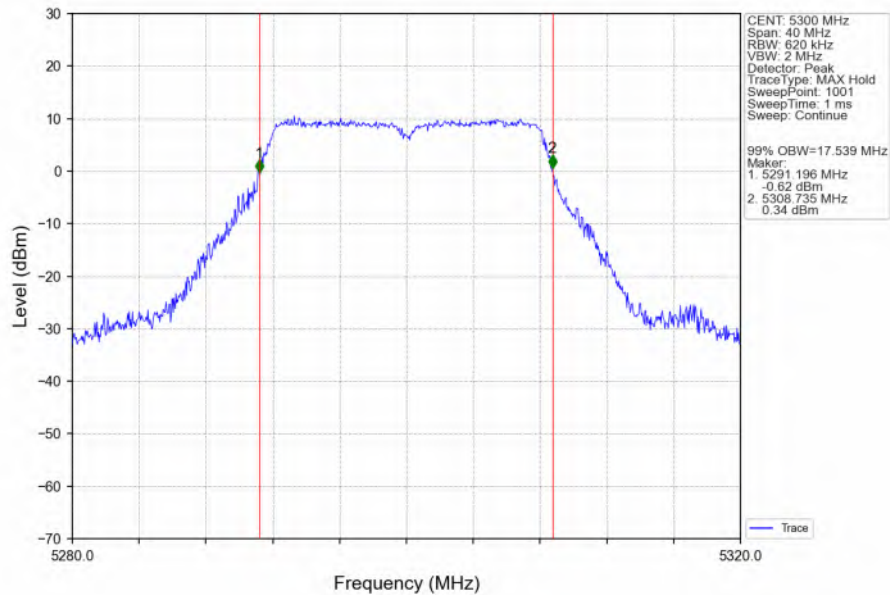


802.11a_HCH_5320MHz_Ant1_NTNV

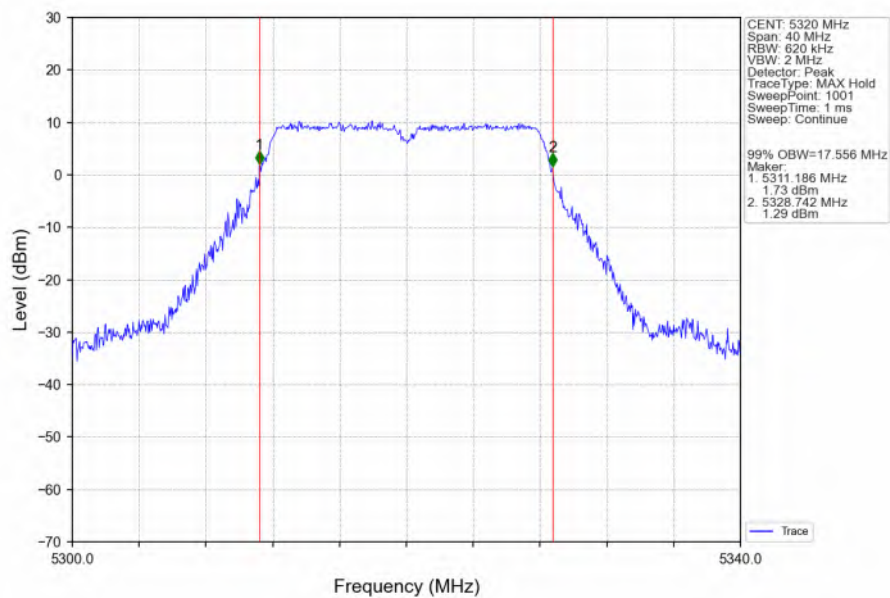


802.11a_LCH_5500MHz_Ant1_NTNV

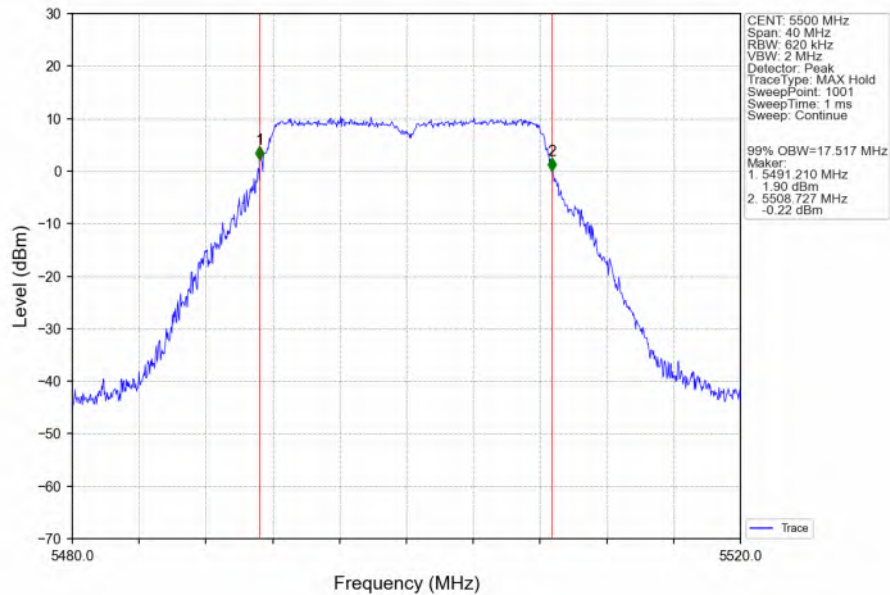


802.11a_MCH_5580MHz_Ant1_NTNV

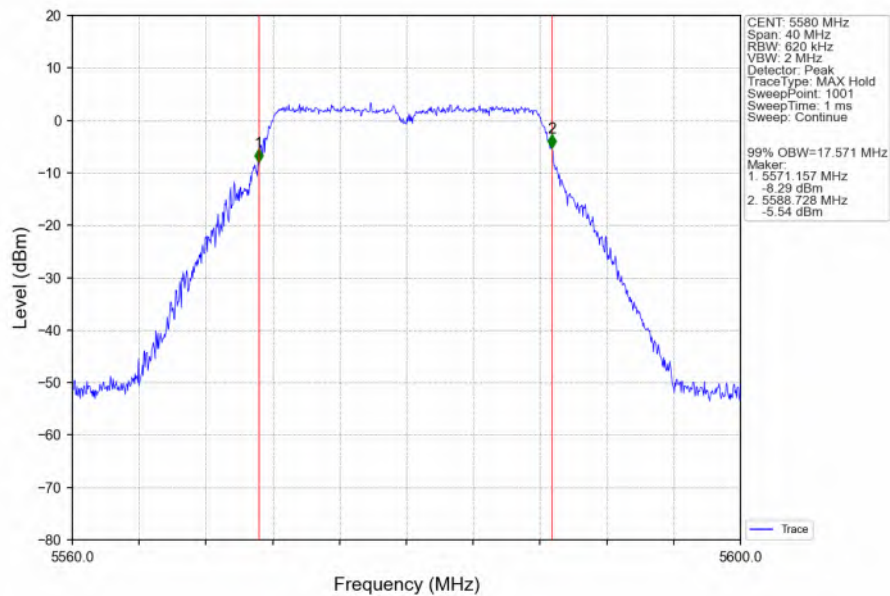


802.11a_HCH_5700MHz_Ant1_NTNV

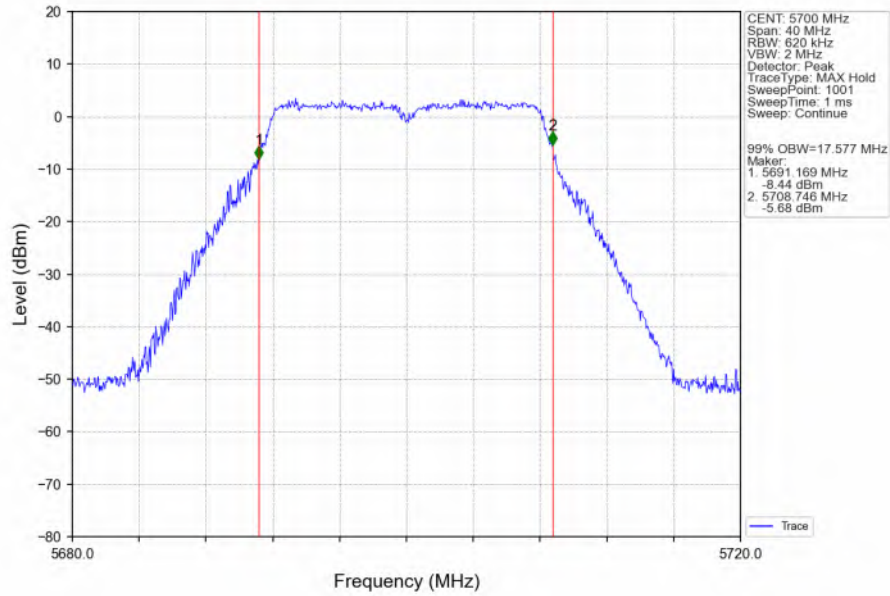


802.11a_LCH_5745MHz_Ant1_NTNV

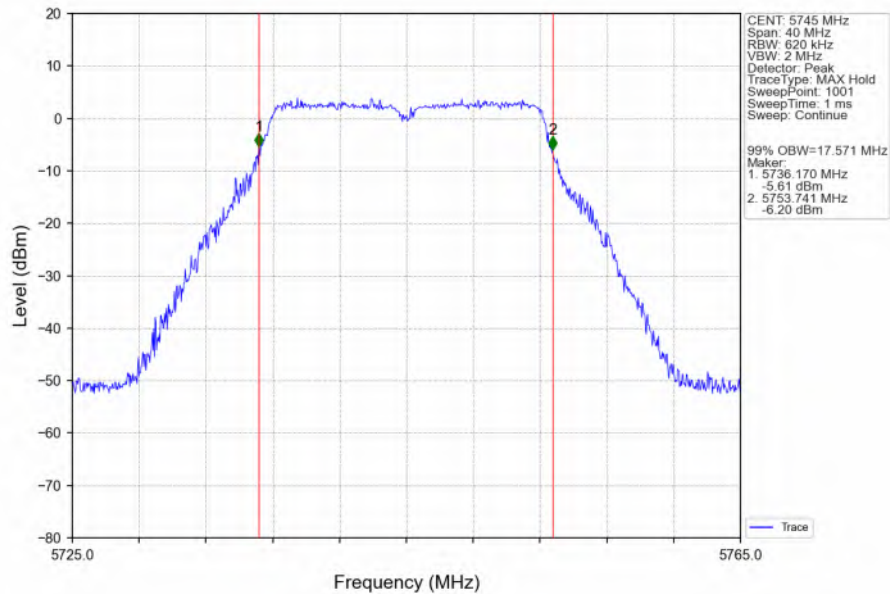


802.11a_MCH_5785MHz_Ant1_NTNV

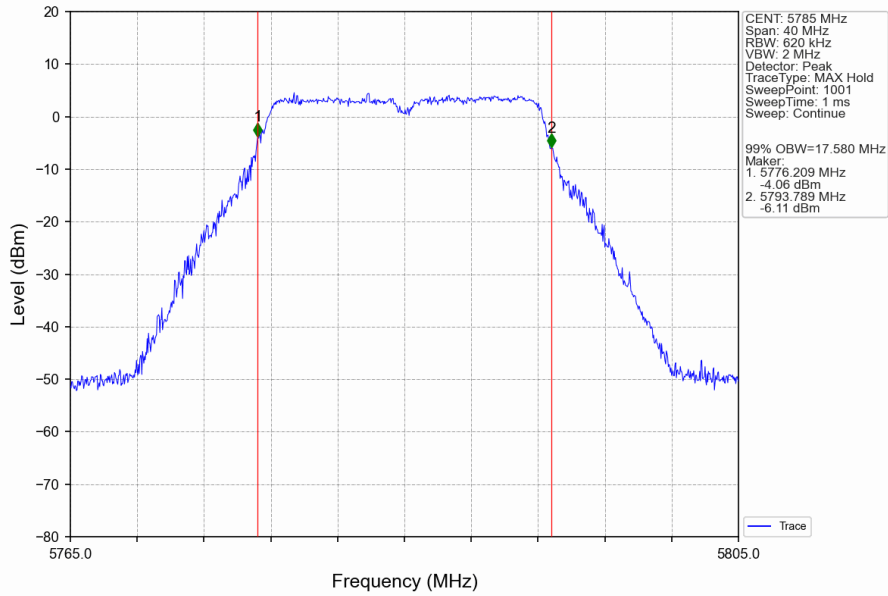


802.11a_HCH_5825MHz_Ant1_NTNV

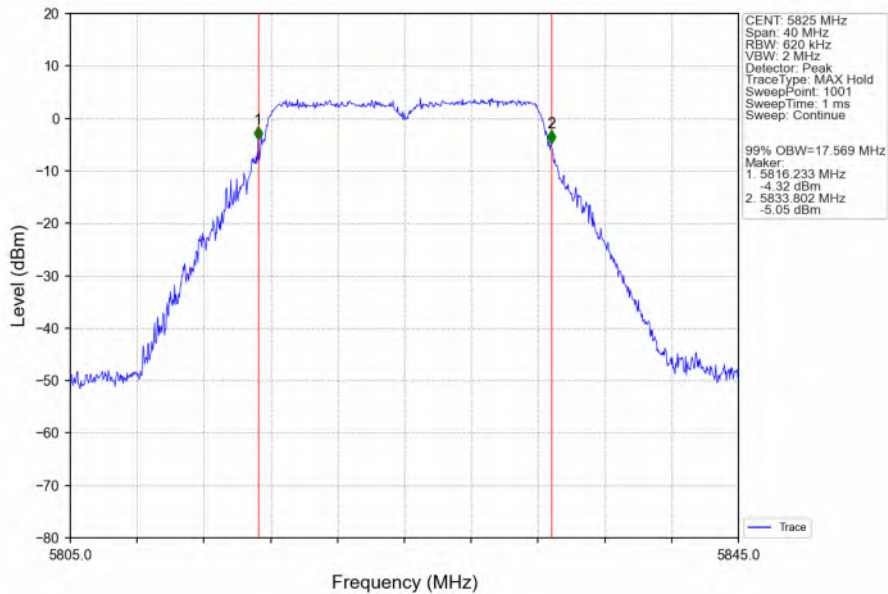


802.11a_HCH_5720MHz_Ant1_NTNV

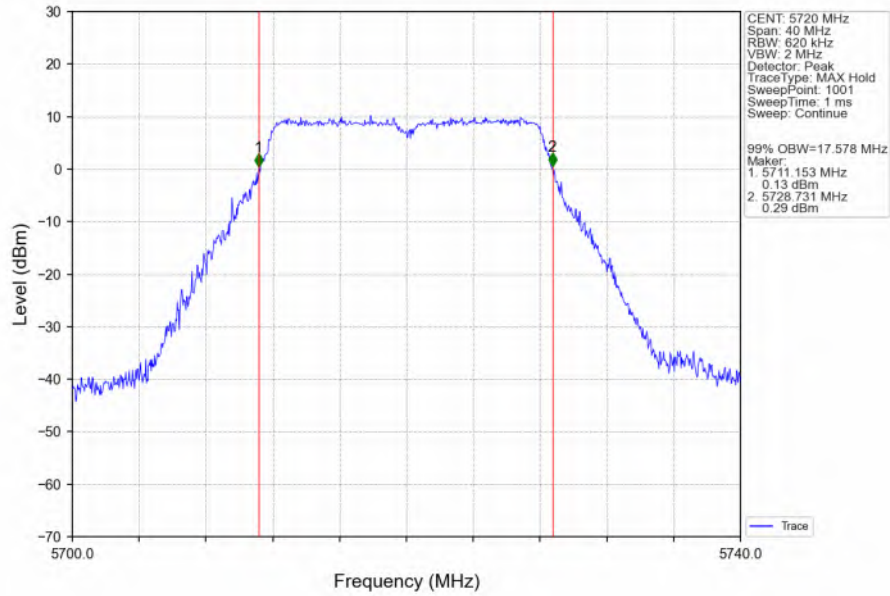


802.11be(EHT20)_LCH_5180MHz_SU / Ant1_NTNV

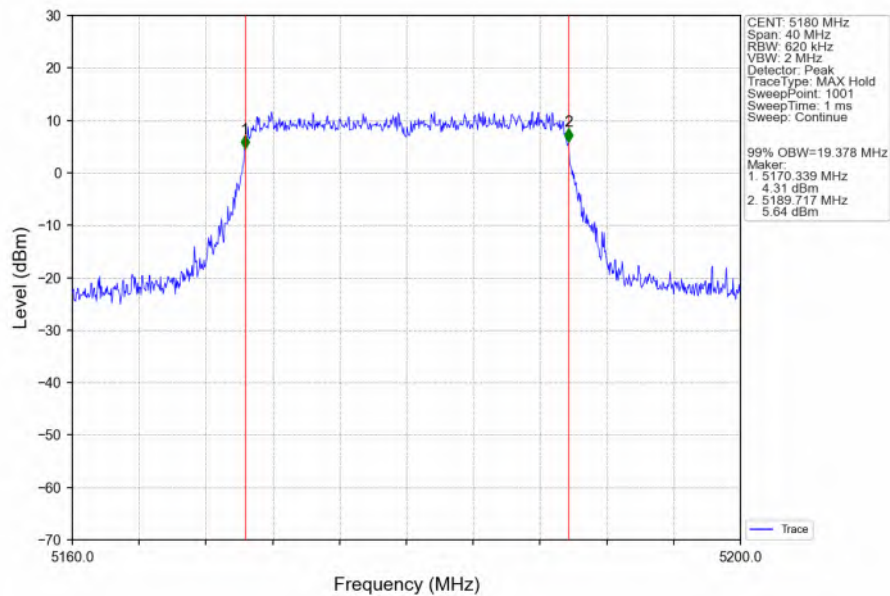


802.11be(EHT20) MCH 5200MHz SU / Ant1 NTN

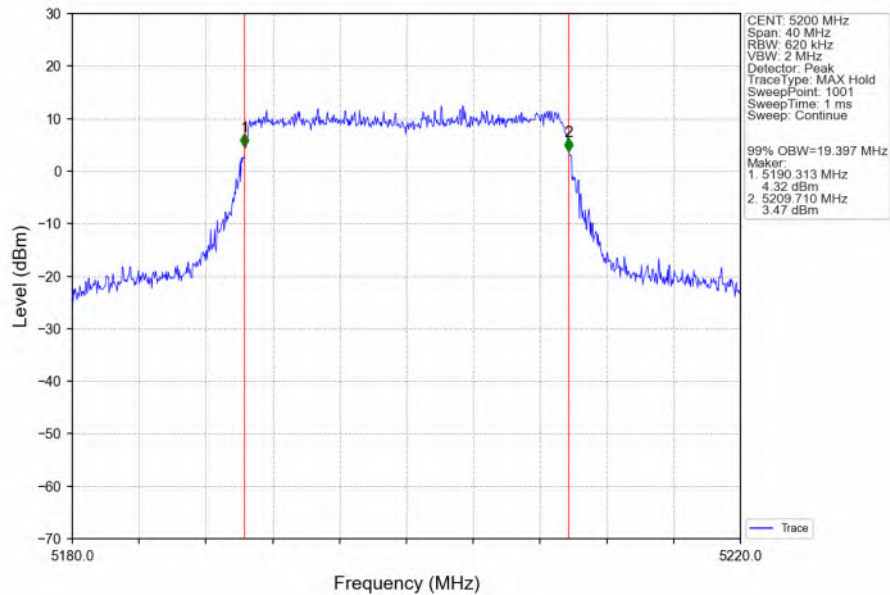


802.11be(EHT20) HCH 5240MHz SU / Ant1 NTN

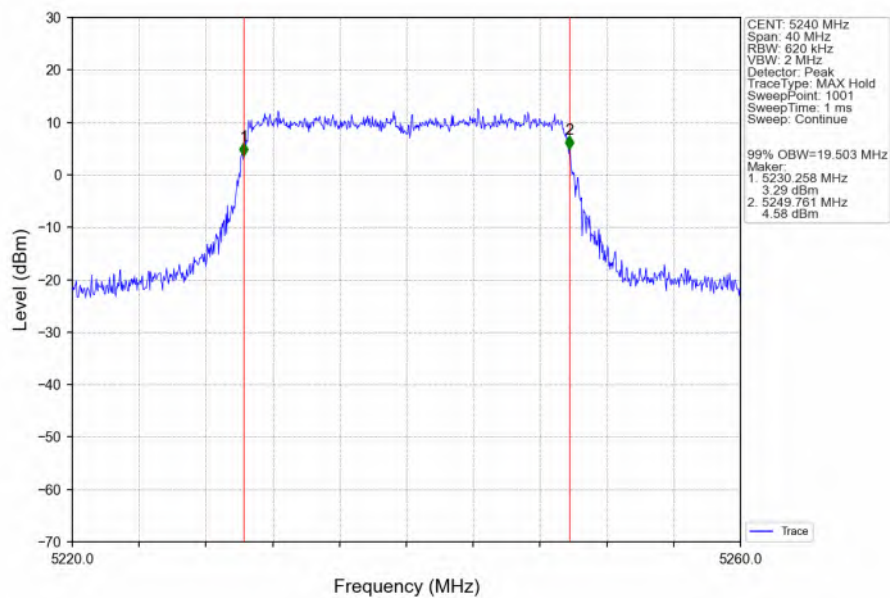


802.11be(EHT20) LCH 5260MHz SU / Ant1_NTNV

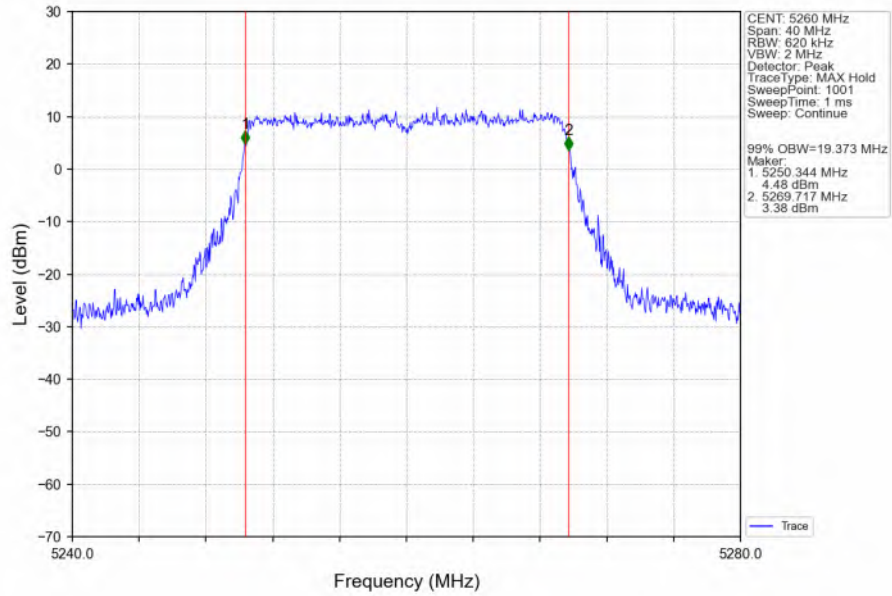


802.11be(EHT20) MCH 5300MHz SU / Ant1_NTNV

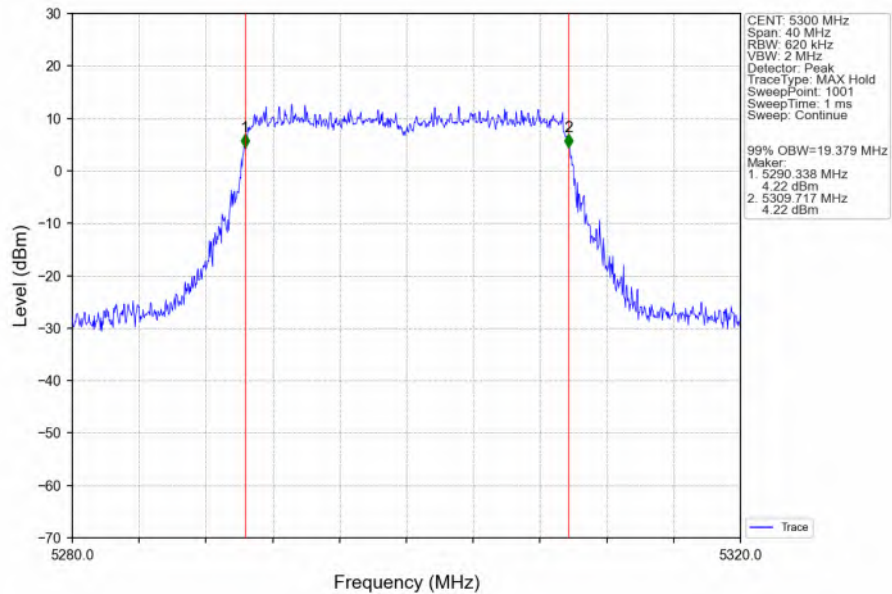


802.11be(EHT20) HCH 5320MHz SU / Ant1 NTN

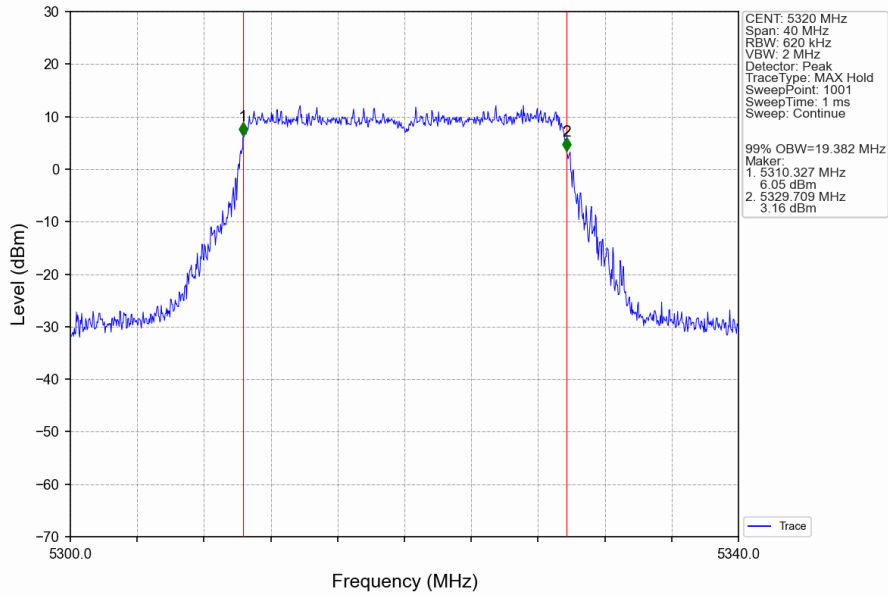


802.11be(EHT20) LCH 5500MHz SU / Ant1 NTN

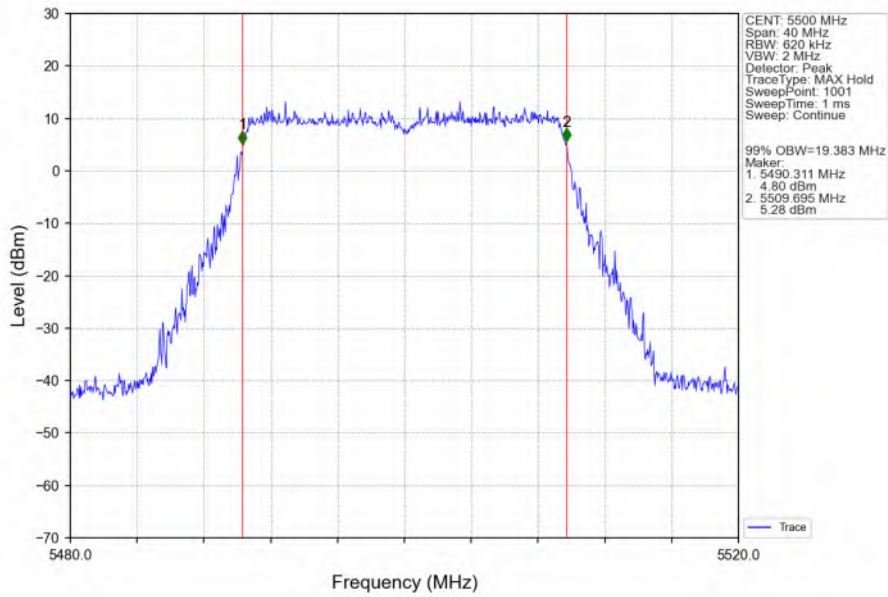


802.11be(EHT20) MCH 5580MHz SU / Ant1 NTVN

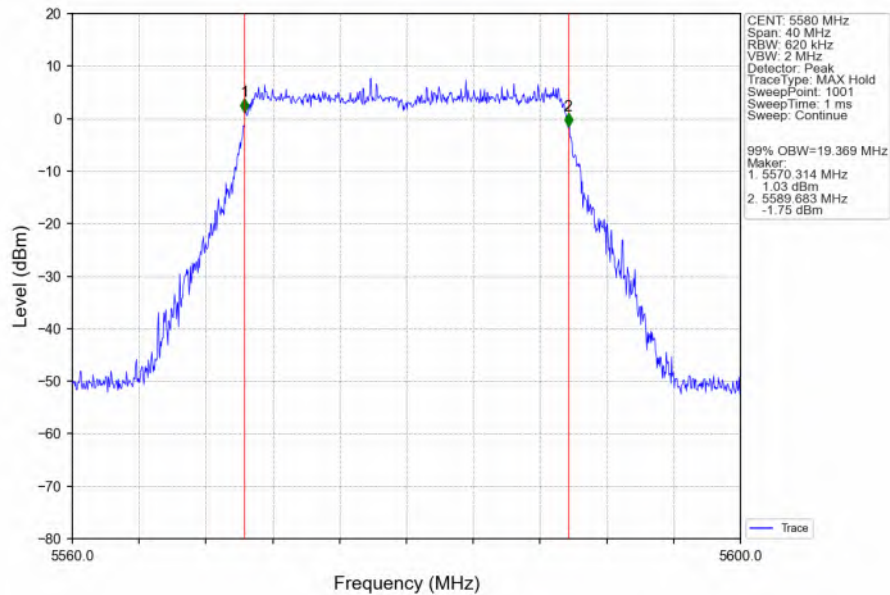


802.11be(EHT20) HCH 5700MHz SU / Ant1 NTVN

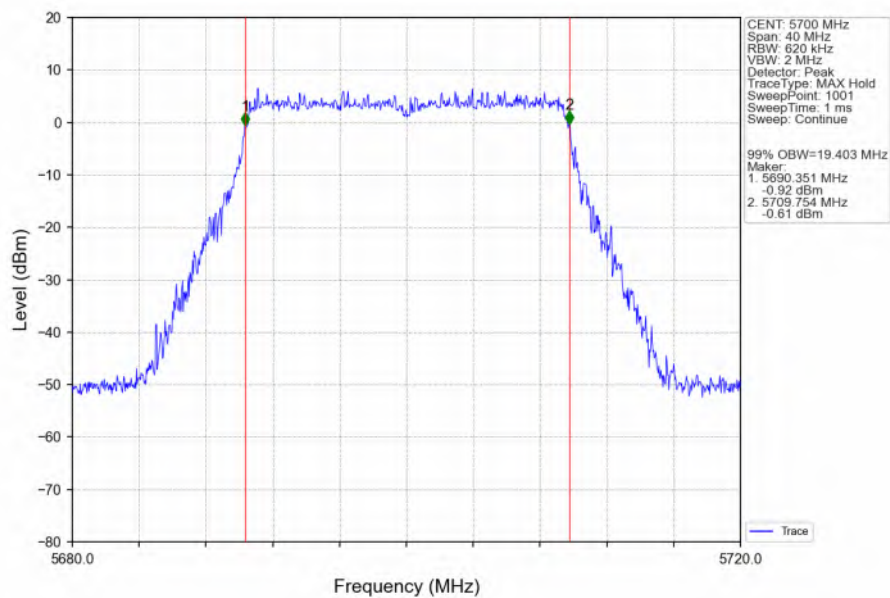


802.11be(EHT20) LCH 5745MHz SU / Ant1_NTNV

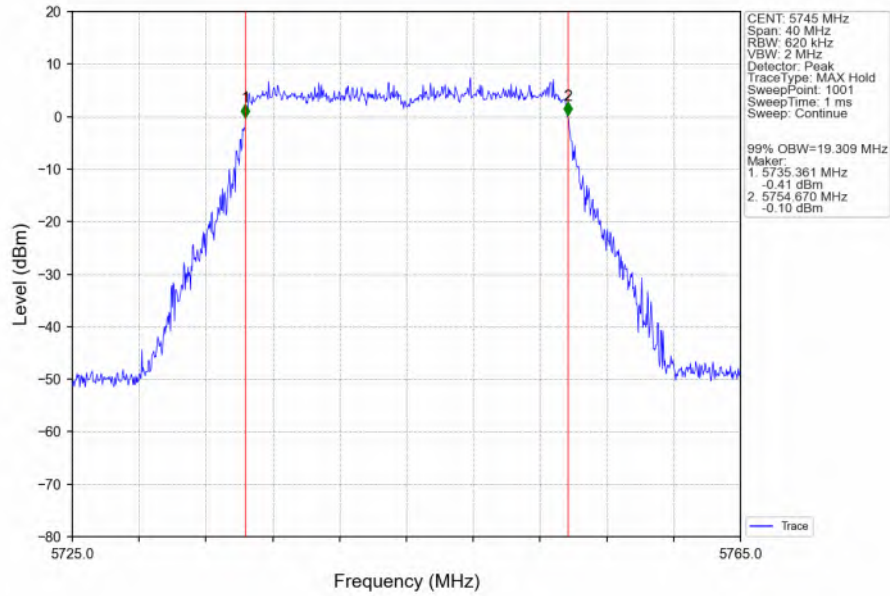


802.11be(EHT20) MCH 5785MHz SU / Ant1_NTNV

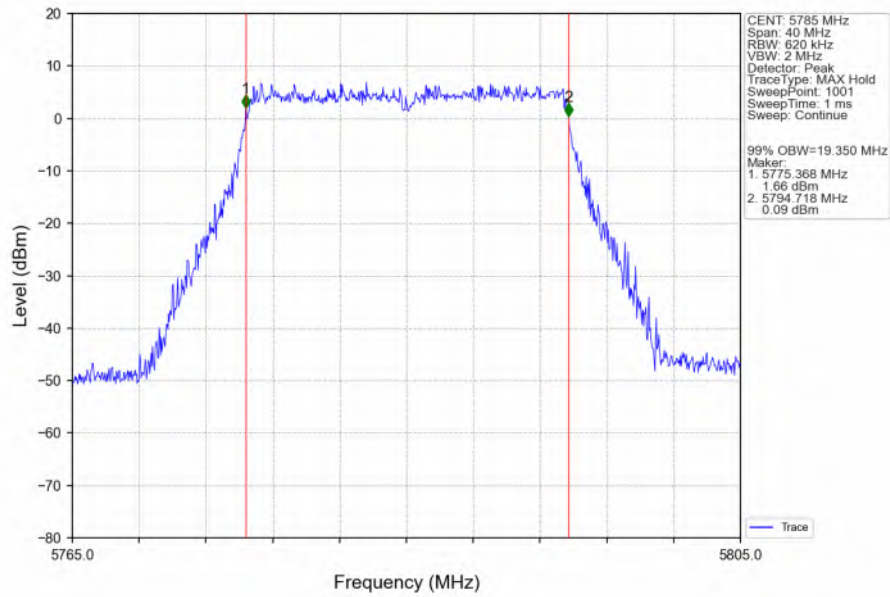


802.11be(EHT20) HCH 5825MHz SU / Ant1 NTV

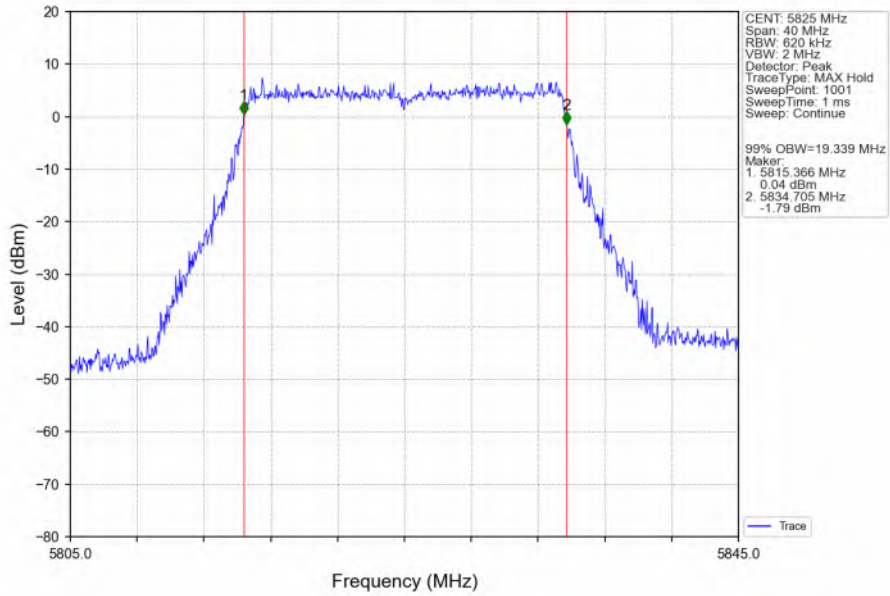


802.11be(EHT20) HCH 5720MHz SU / Ant1 NTV

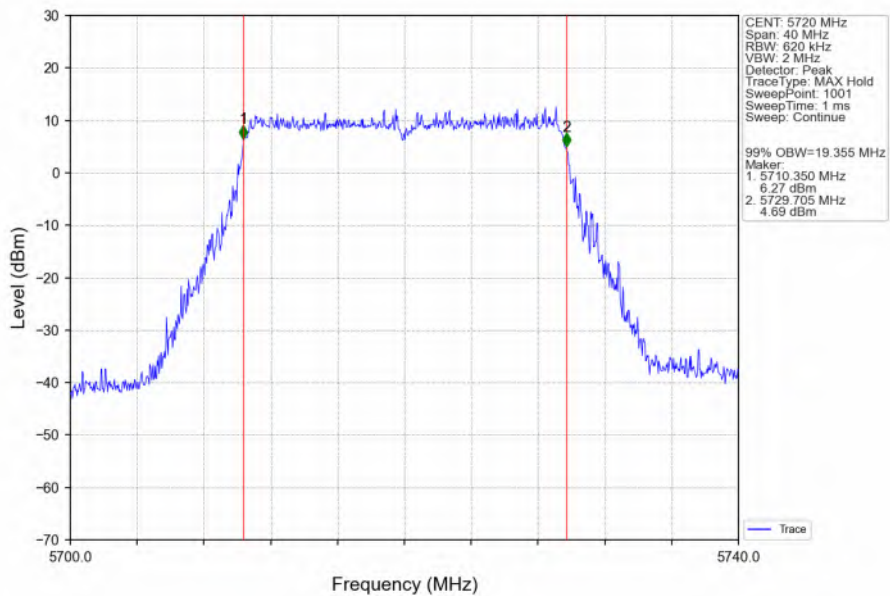


802.11be(EHT40) LCH 5190MHz SU / Ant1_NTNV

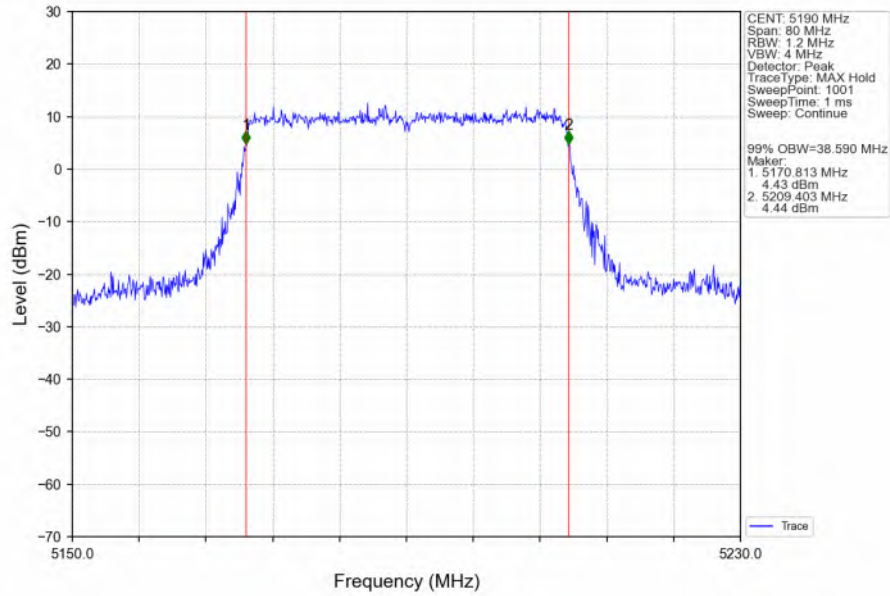

802.11be(EHT40) HCH 5230MHz SU / Ant1_NTNV

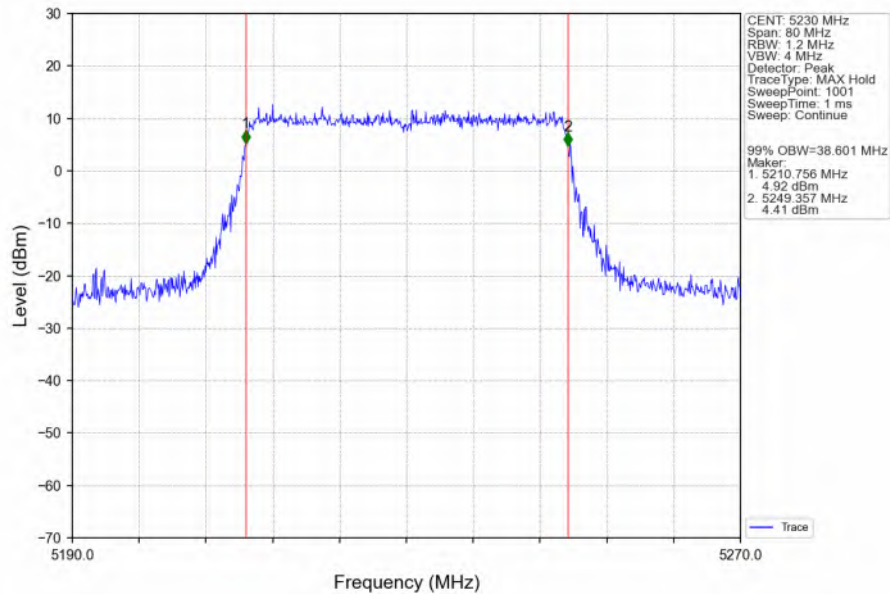

802.11be(EHT40) LCH 5270MHz SU / Ant1_NTNV

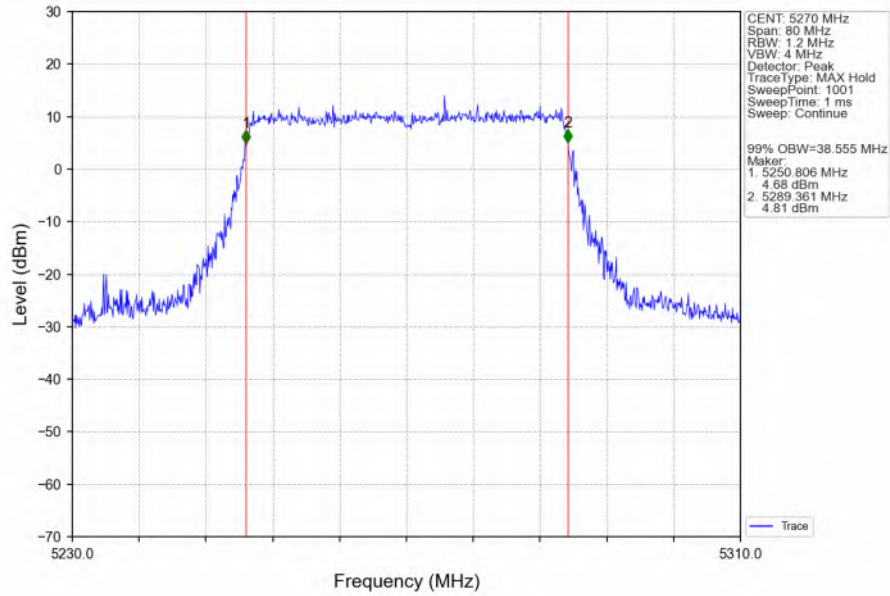

802.11be(EHT40) HCH 5310MHz SU / Ant1_NTNV

