

TEST REPORT

Application No.: SUCR2510001011MO
Applicant: Digi International Inc
Address of Applicant: 9350 Excelsior Blvd. Suite 700 Hopkins, MN 55343 United States
Manufacturer: Digi International Inc
Address of Manufacturer: 9350 Excelsior Blvd. Suite 700 Hopkins, MN 55343 United States
Equipment Under Test (EUT):
EUT Name: WIFI 7 Module
Model No.: DI-W732
Trade Mark: DIGI
FCC ID: MCQ-DIW732
Standard(s) : 47 CFR Part 15, Subpart E 15.407
Date of Receipt: 2025-10-21
Date of Test: 2025-12-01 to 2026-01-05
Date of Issue: 2026-01-05

Test Result:
Pass*

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com



Revision Record			
Version	Description	Date	Remark
00	Original	2026-01-05	/

Authorized for issue by:			
Tested By		Nature Shen	
		Nature Shen/Project Engineer	
Approved By		Cedar cheng	
		Cedar Cheng /Reviewer	



Report No.: SUCR251000101104

Page: 3 of 921

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2020) Section 6.2	47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)	Pass
Radiated Emissions (Below 1GHz)		ANSI C63.10 (2020) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions (Above 1GHz)		ANSI C63.10 (2020) Section 6.6	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2020) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
In-Band Emissions		ANSI C63.10 (2020) Section 12.6	47 CFR Part 15, Subpart E 15.407 (b)	Pass
Contention-based Protocol		KDB 987594 D02	47 CFR Part 15, Subpart E 15.407 (d)(6)	Pass
Duty Cycle		ANSI C63.10 (2020) Section 12.2	ANSI C63.10 (2020) Section 12.2	Pass
99% Bandwidth		ANSI C63.10 (2020) Section 12.5.3	ANSI C63.10 (2020) Section 12.5.3	Pass
26dB Emission bandwidth		ANSI C63.10 (2020) Section 12.5.2	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Maximum Conducted output power		ANSI C63.10 (2020) Section 12.4	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Peak Power spectrum density		ANSI C63.10 (2020) Section 12.6	47 CFR Part 15, Subpart E 15.407 (a)	Pass

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary	3
3 Contents.....	4
4 General Information.....	5
4.1 Details of E.U.T.	5
4.2 Environment Parameter	5
4.3 Description of Support Units	5
4.4 Measurement Uncertainty & Decision Rule	6
4.5 Test Location	7
4.6 Test Facility	7
4.7 Deviation from Standards.....	7
4.8 Abnormalities from Standard Conditions.....	7
5 Equipment List	8
6 Radio Spectrum Technical Requirement.....	10
6.1 Antenna Requirement	10
7 Radio Spectrum Matter Test Results	12
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	12
7.2 Radiated Emissions (Below 1GHz)	16
7.3 Radiated Emissions (Above 1GHz).....	22
7.4 Radiated Emissions which fall in the restricted bands	143
7.5 In-Band Emissions	265
7.6 Contention-based Protocol.....	267
7.7 Duty Cycle	268
7.8 99% Bandwidth	269
7.9 26dB Emission bandwidth	270
7.10 Maximum Conducted output power	271
7.11 Peak Power spectrum density	273
8 Test Setup Photo	275
9 EUT Constructional Details (EUT Photos).....	275
10 Appendix.....	276



4 General Information

4.1 Details of E.U.T.

Power supply:	3.3V		
IEEE 802.11 WLAN Mode Supported:	☒ 802.11a (20 MHz channel bandwidth) ☒ 802.11n/ac/ax/be (20 MHz channel bandwidth) ☒ 802.11n/ac/ax/be (40 MHz channel bandwidth) ☒ 802.11ac/ax/be (80 MHz channel bandwidth) ☒ 802.11ac/ax/be (160 MHz channel bandwidth) ☒ 802.11be (320 MHz channel bandwidth)		
Operation Frequency:	5925 MHz ~ 6425 MHz 6425 MHz ~ 6525 MHz 6525 MHz ~ 6875 MHz 6875 MHz ~ 7125 MHz		
Type of Modulation:	OFDM/OFDMA		
FCC Classification:	Low-power indoor access points (61D)		
Antenna Type:	External Antenna		
Smart System:	☒ SISO	802.11a/n/ac/ax/be	
	☒ MIMO	802.11a/n/ac/ax/be: 2Tx & 2Rx	
	☒ Diversity	802.11a/n/ac/ax/be: 2Tx & 2Rx	
Antenna Gain:	ANT1: UNII-5: 4.3dBi; UNII-6: 2.2dBi; UNII-7: 2.5dBi; UNII-8: 3.3dBi; ANT2: UNII-5: 4.2dBi; UNII-6: 1.8dBi; UNII-7: 3.1dBi; UNII-8: 1.3dBi; (Provided by the manufacturer)		

4.2 Environment Parameter

Environment Parameter		Selected Values During Tests	
Relative Humidity		Ambient	
Value		Temperature(°C)	Voltage(V)
NTNV		25	3.3
Note:			
NV:Normal Voltage		LV:Low Extreme Test Voltage	HV:High Extreme Test Voltage
NT:Normal Temperature		LT:Low Extreme Test Temperature	HT:High Extreme Test Temperature

4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Computer	Lenovo	T14	2YK6GR
Mouse	Lenovo	3D optical Mouse	N/A
Router	Smavwave Technology Co.,Ltd	SRT 421	RT421X02211300001

4.4 Measurement Uncertainty & Decision Rule

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	Conduction emission	$\pm 3.0\text{dB}$ (150kHz to 30MHz)
5	RF conducted power	$\pm 0.75\text{dB}$
6	RF power density	$\pm 2.84\text{dB}$
7	Conducted Spurious emissions	$\pm 0.75\text{dB}$
8	RF Radiated power	$\pm 3.3\text{dB}$ (9KHz-30MHz)
		$\pm 2.6\text{dB}$ (30MHz-1GHz)
		$\pm 2.7\text{dB}$ (1GHz-18GHz)
		$\pm 4.8\text{dB}$ (Above 18GHz)
9	Temperature test	$\pm 1^\circ\text{C}$
10	Humidity test	$\pm 3\%$
11	Supply voltages	$\pm 1\%$
12	Time	$\pm 3\%$
Remark: The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.		

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu)
Pilot Free Trade Zone

No tests were sub-contracted.

Note:

1.SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).

2.SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).

3. Sample source: sent by customer.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA (Certificate No. 6336.01)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.is accredited by the American Association for Laboratory Accreditation (A2LA).

• **FCC (Designation Number: CN1312)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized as an accredited testing laboratory. Test Firm Registration Number:717327

• **ISED (CAB Identifier: CN0120)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 27594

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

5 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
Conducted Emission at Mains Terminals						
1	EMI Test Receive	R&S	ESR7	SUWI-01-10-01	1/15/2025	1/14/2026
2	LISN	R&S	ENV216	SUWI-01-19-03	5/8/2025	5/7/2026
3	LISN	Schwarzbeck	ENV216	SUWI-01-19-04	5/8/2025	5/7/2026
4	Test Software	Tonscend	JS32-CE_4.0.0.2	SUWI-02-09-05	NCR	NCR
RF Conducted Test						
1	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	1/20/2025	1/19/2026
2	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-15	11/21/2025	11/20/2026
3	MXG Vector signal genitor	KEYSIGHT	N5182B	SUWI-01-38-01	1/15/2025	1/14/2026
4	Signal Generator	ROHDE&SCHWARZ	SMW200A	SUWI-01-07-08	3/27/2025	3/26/2026
5	Signal Generator	ROHDE&SCHWARZ	SMW100A	SUWI-01-8-01	1/16/2025	1/15/2026
6	MXG Vector Signal Generator	ROHDE&SCHWARZ	SMR20	SUWI-01-33-01	11/21/2025	11/20/2026
7	Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-13	5/8/2025	5/7/2026
8	Wideband Radio Communication Test Station	Anritsu	MT8000A	SUWI-01-34-02	11/21/2025	11/20/2026
9	Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	11/21/2025	11/20/2026
10	Power meter	Anritsu	ML2495A	SUWI-01-31-01	11/21/2025	11/20/2026
11	Pulse power sensor	Anritsu	MA2411B	SUWI-01-32-01	11/21/2025	11/20/2026
12	DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	1/15/2025	1/14/2026
13	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2/13/2025	2/12/2026
14	Temperature Chamber	GIANT FORCE	ICT-017-40-SP-SD	SUWI-01-13-02	5/7/2025	5/6/2026
15	Measurement Software	TST	TST 272 V2.02	SUWI-03-55-03	NCR	NCR
16	RF Control unit	TST	TSCB3023R2	SUWI-02-20-01	NCR	NCR
17	RFCables	Tonscend	NA	SUWI-01-03-01	1/16/2025	1/15/2026
RF Radiated Test						
1	Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	6/3/2023	6/2/2026
2	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	1/20/2025	1/19/2026
3	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-09	11/21/2025	11/20/2026
4	Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	1/15/2025	1/14/2026
5	Signal Generator	ROHDE&SCHWARZ	SMW100A	SUWI-01-18-01	1/16/2025	1/15/2026
6	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	VULB 9168	SUWI-01-11-04	9/10/2025	9/9/2027
7	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	5/7/2025	5/6/2027
8	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9170	SUWI-01-11-03	5/7/2025	5/6/2027
9	Active Loop Antenna	SCHWRZBECK MESS-	FMZB 1519B	SUWI-01-21-01	5/7/2025	5/6/2027



Report No.: SUCR251000101104

Page: 9 of 921

		ELEKTRONIK				
10	Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	1/16/2025	1/15/2026
11	Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	1/16/2025	1/15/2026
12	Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	1/20/2025	1/19/2026
13	Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-26-01	11/21/2025	11/20/2026
14	Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	8/25/2025	8/24/2026
15	Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-09	8/26/2025	8/25/2026
16	Radio Communication Analyzer	StarPoint	SP9500E	SUWI-01-28-02	11/21/2025	11/20/2026
17	Signal Generator	ROHDE&SCHWARZ	SMB100A	SUWI-01-08-01	1/16/2025	1/15/2026
18	DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	1/15/2025	1/14/2026
19	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2/13/2025	2/12/2026
20	Measurement Software	Tonscend	JS32-RE 4.0.0.0	SUWI-02-09-06	NCR	NCR
21	RF Control unit	Tonscend	JS0806-1	SUWI-02-20-01	NCR	NCR
22	RFCables	Tonscend	NA	SUWI-01-03-02	1/16/2025	1/15/2026

Remark: NCR=No Calibration Requirement.



6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The module uses a dedicated RF connector not intended for user replacement, meeting §15.203.

The best case gain of the antenna is

ANT1: UNII-5: 4.3dBi; UNII-6: 2.2dBi; UNII-7: 2.5dBi; UNII-8: 3.3dBi;

ANT2: UNII-5: 4.2dBi; UNII-6: 1.8dBi; UNII-7: 3.1dBi; UNII-8: 1.3dBi;

Cyclic Delay Diversity (CDD) System:

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

If all antennas have the same gain, G_{ANT} , Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices,
 $Array\ Gain = 10 \log(N_{ANT}/N_{SS} = 1) \text{ dB}$.
- For power measurements on IEEE 802.11 devices:
 $Array\ Gain = 0 \text{ dB}$ (i.e., no array gain) for $N_{ANT} \leq 4$;

For power, the directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain.

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The Power and PSD limit should be modified if the directional gain of eut is over 6dbi.

The EUT supports CDD System.

Unequal antenna gain:

Operation Frequency	ANT Gain 1 (dBi)	ANT Gain 2 (dBi)	Directional gain For Power (dBi)	Directional gain For PSD (dBi)
5925 MHz to 6425 MHz	4.3	4.2	4.3	7.26
6425 MHz to 6525 MHz	2.2	1.8	2.2	5.01
6525 MHz to 6875 MHz	2.5	3.1	3.1	5.82
6875 MHz to 7125 MHz	3.3	1.3	3.3	5.37

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)

Test Method: ANSI C63.10 (2020) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C


Humidity: 44 % RH

Atmospheric Pressure: 1001 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	09	TX mode (U-NII-5) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Pre-scan	10	TX mode (U-NII-6) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Pre-scan	11	TX mode (U-NII-7) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Pre-scan	12	TX mode (U-NII-8) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.

7.1.3 Test Setup Diagram

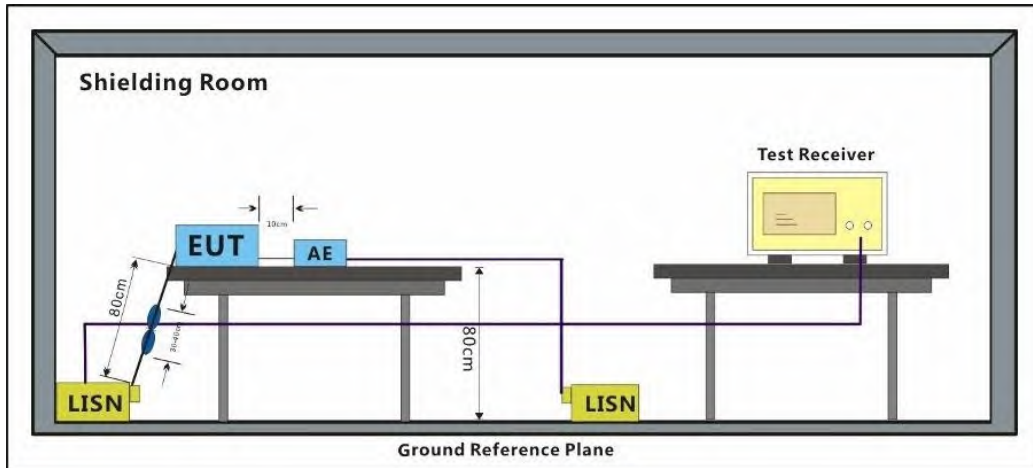


7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark 1: Level=Read Level+ Cable Loss+ LISN Factor


Remark 2: Pre-test AC 120V/50-60Hz&AC 240V/50-60Hz then choose the AC 120/60Hz as worst case.

Test Mode: 09; Line: Live line

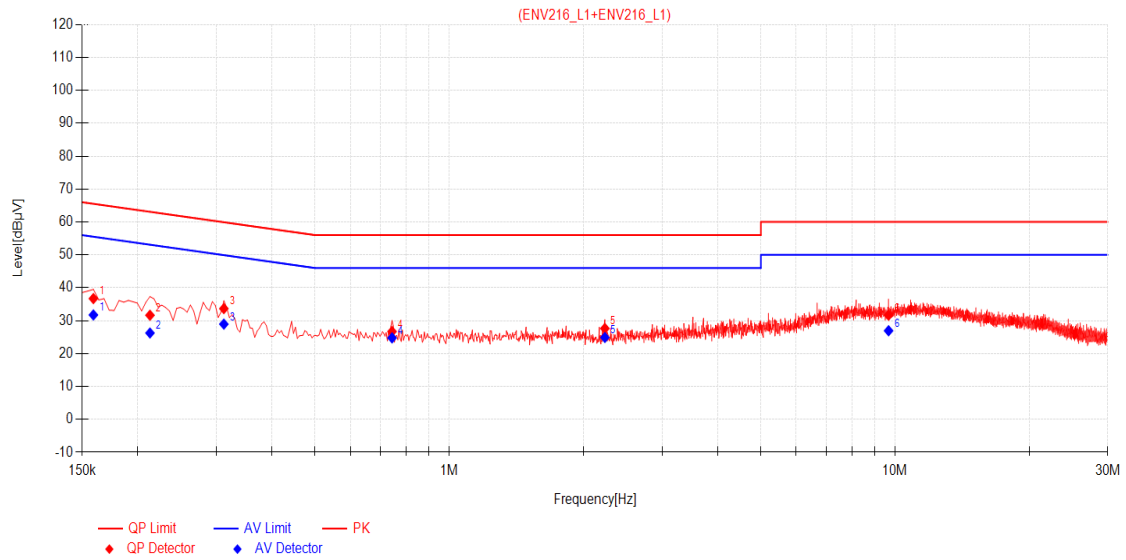

Final Data List											
NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.1590	9.96	26.75	36.71	65.52	28.81	21.78	31.74	55.52	23.78	PASS
2	0.2130	9.97	21.68	31.65	63.09	31.44	16.29	26.26	53.09	26.83	PASS
3	0.3120	9.96	23.71	33.67	59.92	26.25	18.99	28.95	49.92	20.97	PASS
4	0.7440	9.92	16.78	26.70	56.00	29.30	14.85	24.77	46.00	21.23	PASS
5	2.2335	9.88	17.75	27.63	56.00	28.37	15.01	24.89	46.00	21.11	PASS
6	9.6720	9.98	21.68	31.66	60.00	28.34	16.96	26.94	50.00	23.06	PASS

Test Mode: 09; Line: Neutral Line

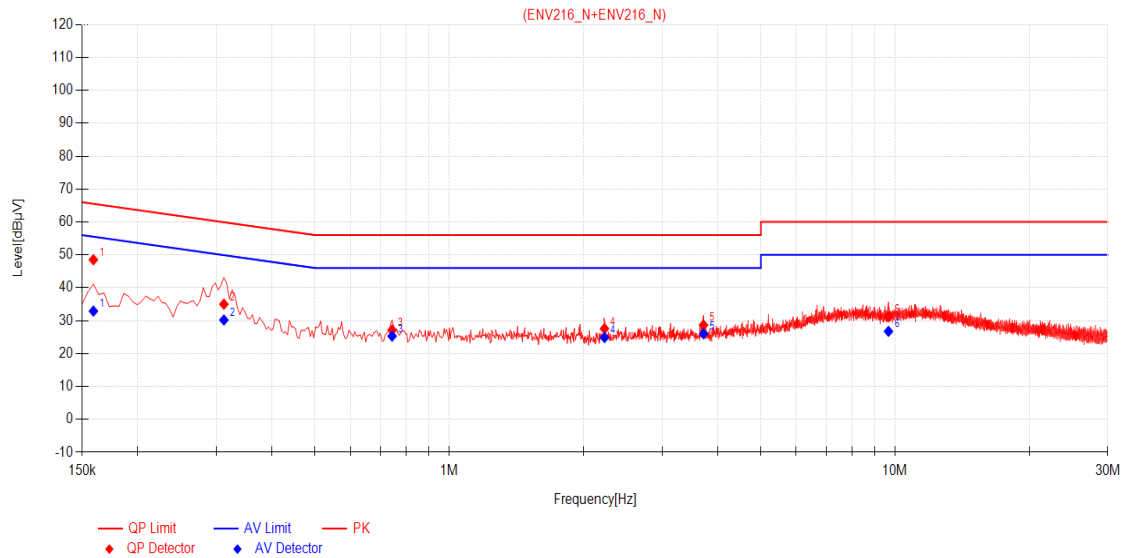

Final Data List

NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.1590	9.95	38.57	48.52	65.52	17.00	22.97	32.92	55.52	22.60	PASS
2	0.3120	9.99	25.02	35.01	59.92	24.91	20.22	30.21	49.92	19.71	PASS
3	0.7440	9.93	17.21	27.14	56.00	28.86	15.37	25.30	46.00	20.70	PASS
4	2.2290	9.93	17.63	27.56	56.00	28.44	14.95	24.88	46.00	21.12	PASS
5	3.7185	9.93	18.77	28.70	56.00	27.30	16.09	26.02	46.00	19.98	PASS
6	9.6675	9.94	21.24	31.18	60.00	28.82	16.81	26.75	50.00	23.25	PASS

7.2 Radiated Emissions (Below 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2020) Section 6.4,6.5

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C


Humidity: 44 % RH

Atmospheric Pressure: 1001 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	09	TX mode (U-NII-5) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Pre-scan	10	TX mode (U-NII-6) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Pre-scan	11	TX mode (U-NII-7) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Pre-scan	12	TX mode (U-NII-8) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

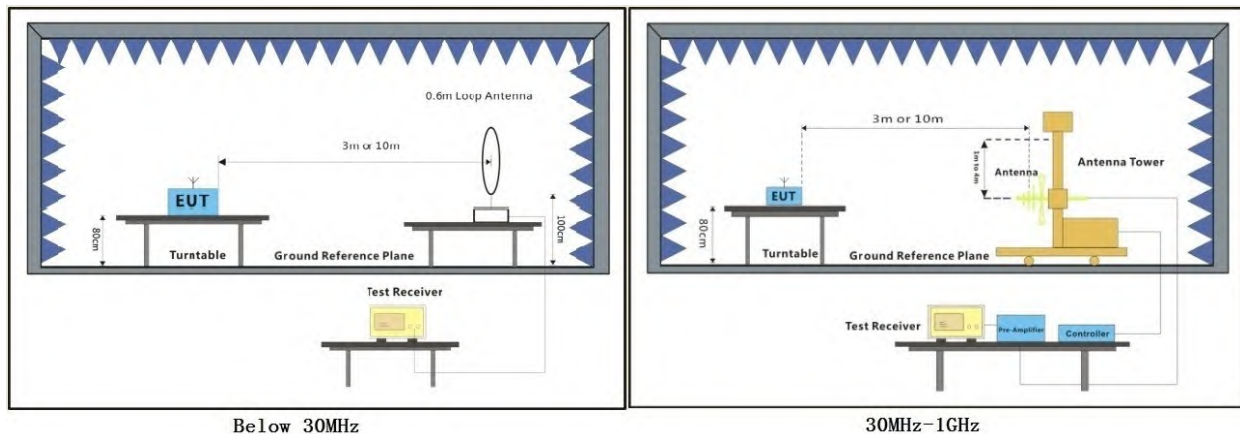


7.2.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:


1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. For emissions testing below 1 GHz, all channels were tested, and only the test data for the worst case is recorded in the report.

Test Mode: 09; Polarity: Coaxial

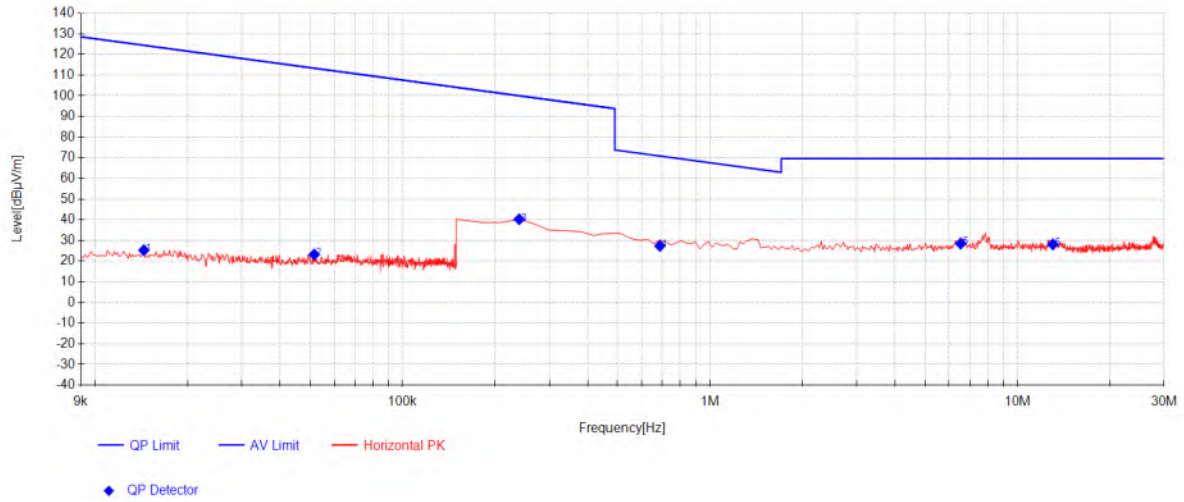

Final Data List										
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
4	0.6873	6.89	20.04	0.44	27.37	70.86	43.49	100	110	Coaxial
5	6.5379	7.65	20.28	0.55	28.48	69.54	41.06	100	190	Coaxial
6	13.0452	7.32	20.10	0.68	28.09	69.54	41.45	100	190	Coaxial
NO.	Frequency [MHz]	AV Reading [dBμV]	AF [dB/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	0.0144	5.15	19.70	0.43	25.28	124.43	99.15	100	170	Coaxial
2	0.0516	2.95	19.81	0.43	23.19	113.35	90.16	100	340	Coaxial
3	0.2396	19.86	19.93	0.43	40.22	100.01	59.79	100	270	Coaxial

Test Mode: 09; Polarity: Coplanar

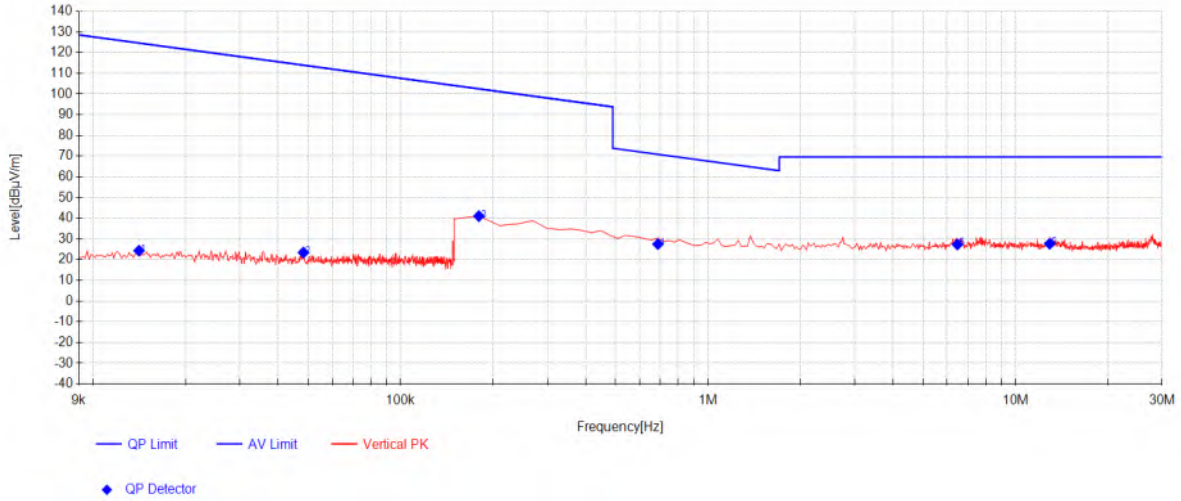


Final Data List										
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
4	0.6873	7.02	20.04	0.44	27.50	70.86	43.36	100	70	Coplanar
5	6.4782	6.5	20.27	0.55	27.33	69.54	42.21	100	210	Coplanar
6	12.9258	6.89	20.10	0.68	27.67	69.54	41.87	100	130	Coplanar
NO.	Frequency [MHz]	AV Reading [dBμV]	AF [dB/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	0.0141	4.21	19.70	0.43	24.34	124.61	100.27	100	360	Coplanar
2	0.0483	3.2	19.79	0.43	23.42	113.92	90.50	100	240	Coplanar
3	0.1798	20.69	19.91	0.43	41.03	102.51	61.48	100	310	Coplanar



Report No.: SUCR251000101104

Page: 20 of 921


Test Mode: 09; Polarity: Horizontal

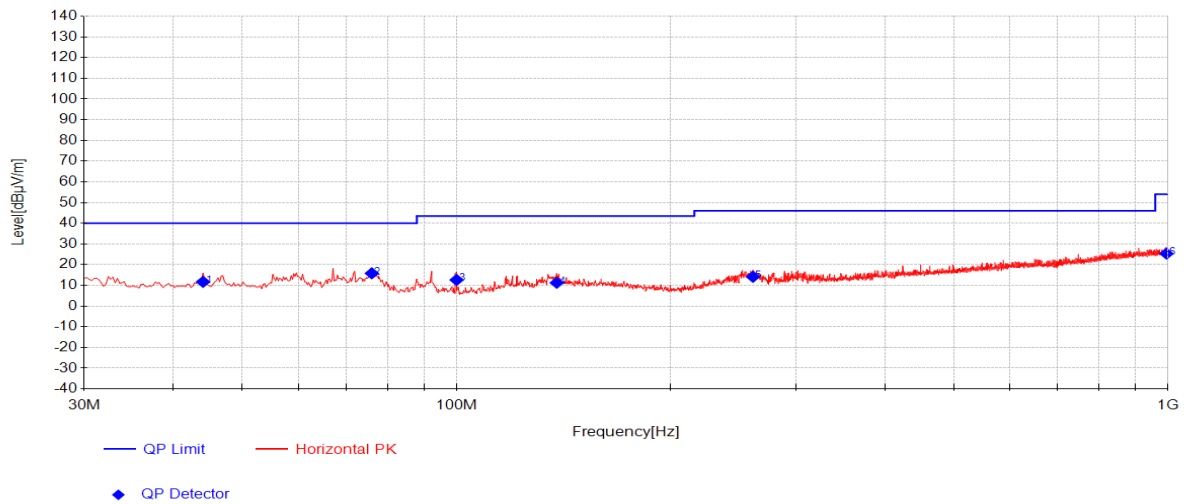

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	44.065	32.17	13.32	-33.79	11.70	40.00	28.30	139	129	Horizontal
2	76.075	39.54	9.65	-33.37	15.82	40.00	24.18	143	268	Horizontal
3	100.0825	36.55	9.21	-33.12	12.64	43.50	30.86	126	14	Horizontal
4	138.3975	31.41	12.60	-32.78	11.24	43.50	32.26	137	14	Horizontal
5	261.1025	34.26	11.74	-31.88	14.12	46.00	31.88	164	34	Horizontal
6	995.3925	28.69	24.46	-27.85	25.30	54.00	28.70	107	305	Horizontal

Test Mode: 09; Polarity: Vertical

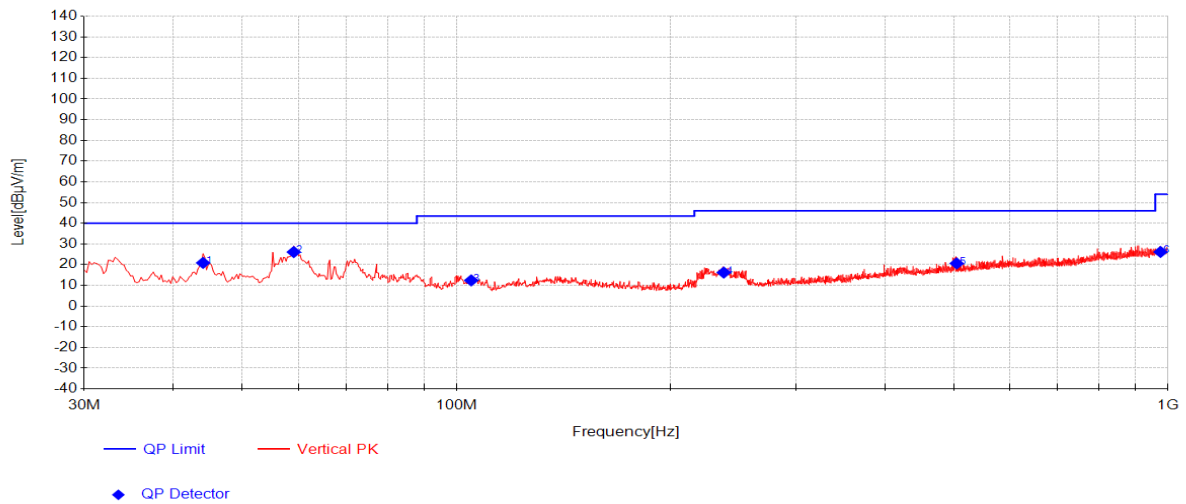

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	44.065	41.34	13.32	-33.79	20.87	40.00	19.13	184	0	Vertical
2	59.1	47.26	12.41	-33.57	26.10	40.00	13.90	142	300	Vertical
3	104.9325	35.69	9.77	-33.06	12.40	43.50	31.10	121	8	Vertical
4	237.58	36.51	11.72	-32.05	16.18	46.00	29.82	127	169	Vertical
5	504.815	33.56	17.52	-30.48	20.59	46.00	25.41	108	169	Vertical
6	976.235	29.84	24.31	-28.00	26.15	54.00	27.85	157	159	Vertical

7.3 Radiated Emissions (Above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2020) Section 6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1GHz	500	3
*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (4) For transmitters operating in the 5.725-5.85 GHz band: (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.		

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C


Humidity: 44 % RH

Atmospheric Pressure: 1001 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	09	TX mode (U-NII-5) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	10	TX mode (U-NII-6) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	11	TX mode (U-NII-7) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.
Final test	12	TX mode (U-NII-8) _Keep the EUT in continuously transmitting mode with all modulation types and being charged. All data rates for each modulation type have been tested, Only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

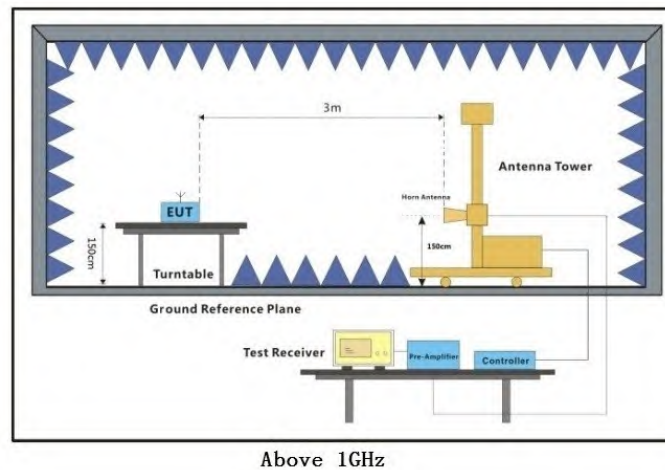


7.3.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:


1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. For emissions testing above 18 GHz, all channels were tested, and only the test data for the worst case is recorded in the report.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.
4. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
6. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle<98%) or 10Hz (Duty cycle $\geq$ 98%) for Average detection (AV) at frequency above 1GHz.

11a_TX_CH_001_Horizontal

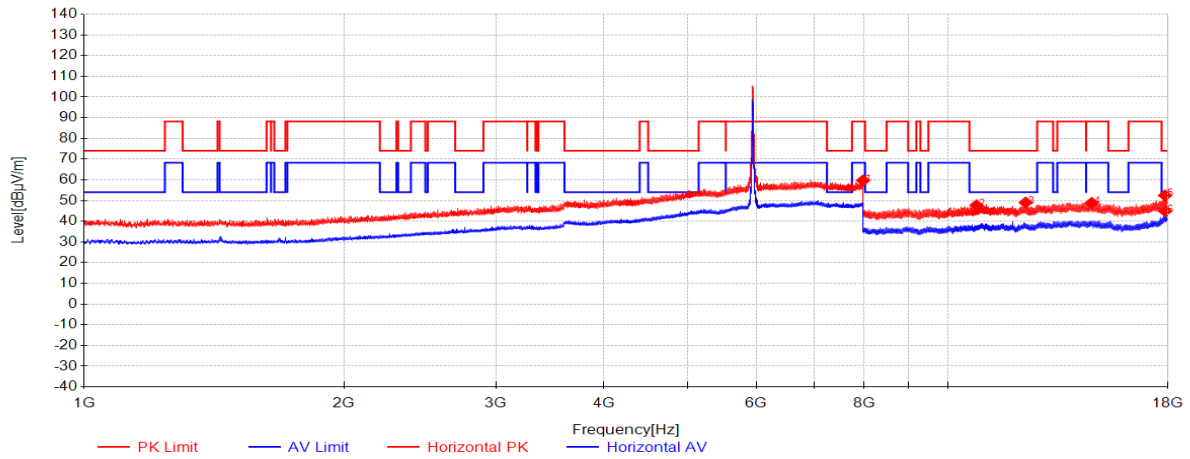


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7981.625	41.23	37.26	-18.79	59.70	88.20	28.50	Horizontal
2	10800.6667	45.06	39.06	-36.43	47.69	74.00	26.31	Horizontal
3	12316	44.33	39.08	-34.36	49.05	74.00	24.95	Horizontal
4	14687.6667	42.49	39.99	-33.63	48.85	88.20	39.35	Horizontal
5	17860.3333	41.93	41.29	-30.75	52.47	74.00	21.53	Horizontal
6	17866.6667	34.41	41.31	-30.80	44.92	54.00	9.08	Horizontal

11a_TX_CH_001_Vertical

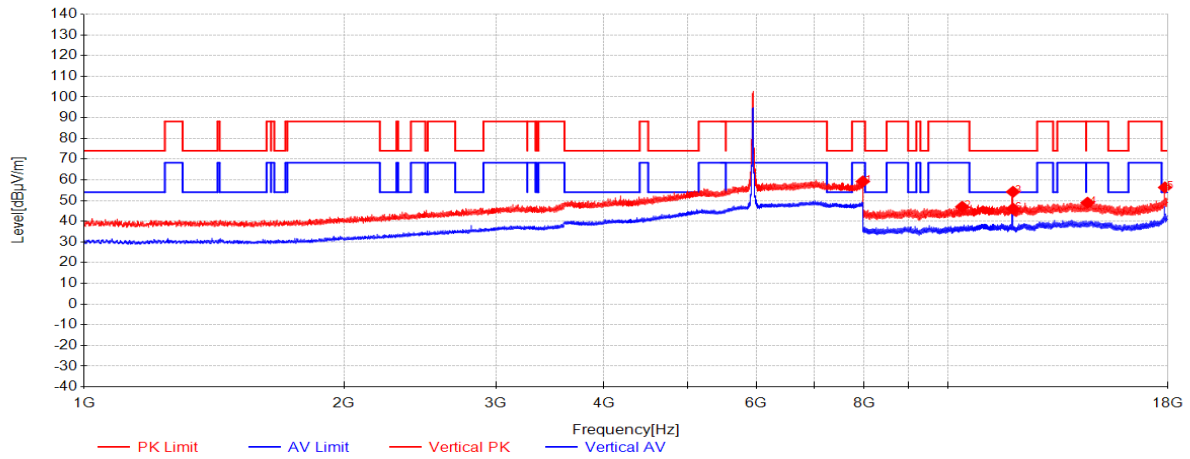


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7977.6875	40.76	37.26	-18.80	59.22	88.20	28.98	Vertical
2	10397.6667	44.79	38.58	-36.39	46.98	88.20	41.22	Vertical
3	11906.3333	50.28	38.76	-34.82	54.21	74.00	19.79	Vertical
4	14525.6667	43.41	40.08	-34.55	48.94	88.20	39.26	Vertical
5	17859.6667	45.79	41.29	-30.75	56.33	74.00	17.67	Vertical
6	11905	42.10	38.76	-34.82	46.04	54.00	7.96	Vertical

11a_TX_CH_045_Horizontal

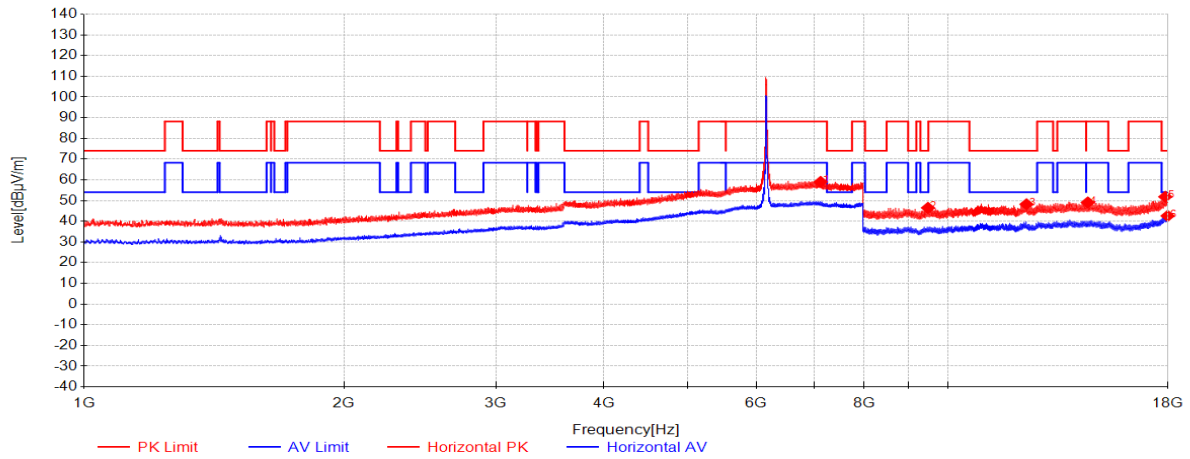


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7127.625	40.16	36.30	-17.47	58.99	88.20	29.21	Horizontal
2	9492	46.61	38.05	-38.20	46.46	74.00	27.54	Horizontal
3	12343.6667	43.67	39.11	-34.58	48.20	74.00	25.80	Horizontal
4	14536.6667	43.49	40.08	-34.51	49.06	88.20	39.14	Horizontal
5	17873.3333	41.35	41.33	-30.85	51.83	74.00	22.17	Horizontal
6	17985.6667	31.71	41.66	-30.77	42.60	54.00	11.40	Horizontal

11a_TX_CH_045_Vertical

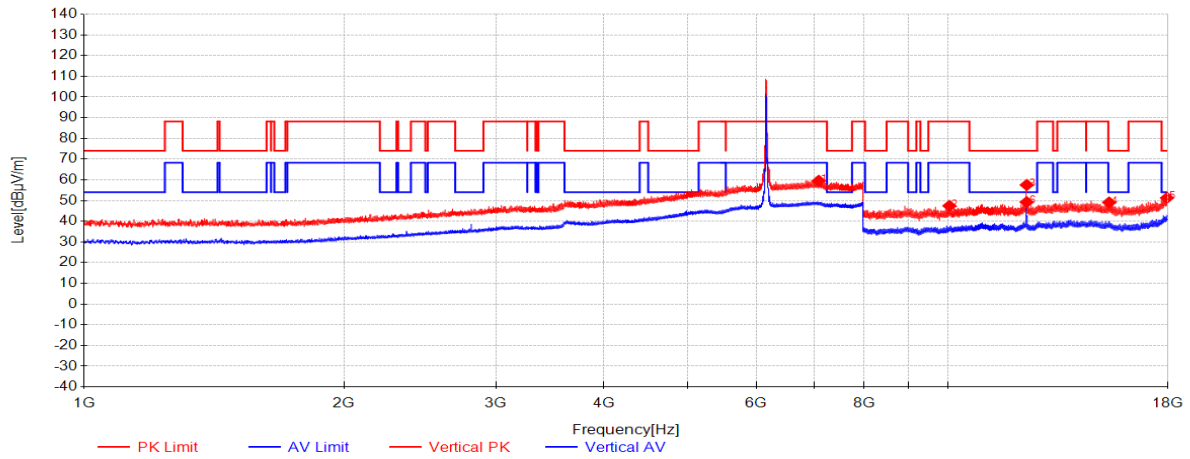


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7091.75	40.57	36.30	-17.31	59.56	88.20	28.64	Vertical
2	10049.3333	46.36	38.16	-37.10	47.42	88.20	40.78	Vertical
3	12352	53.05	39.12	-34.65	57.52	74.00	16.48	Vertical
4	15386.6667	43.38	39.10	-33.40	49.08	74.00	24.92	Vertical
5	17954.6667	40.58	41.57	-30.87	51.28	74.00	22.72	Vertical
6	12349	44.73	39.12	-34.63	49.22	54.00	4.78	Vertical

11a_TX_CH_093_Horizontal

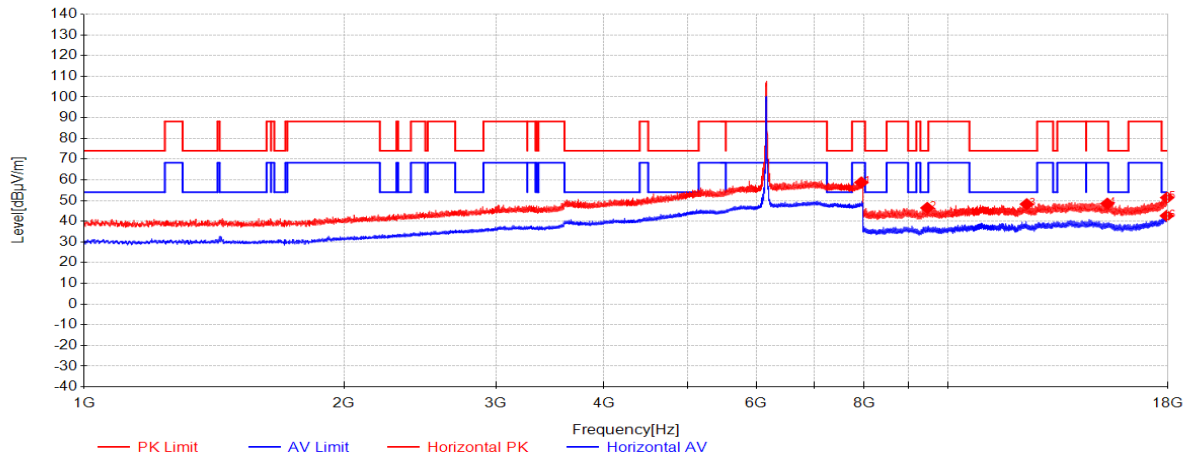


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7946.1875	40.38	37.19	-18.82	58.75	88.20	29.45	Horizontal
2	9474	46.62	38.05	-38.23	46.44	74.00	27.56	Horizontal
3	12352.3333	43.77	39.12	-34.65	48.24	74.00	25.76	Horizontal
4	15312.3333	42.61	39.24	-33.34	48.51	88.20	39.69	Horizontal
5	17964	40.67	41.60	-30.84	51.43	74.00	22.57	Horizontal
6	17942	32.01	41.53	-30.91	42.64	54.00	11.36	Horizontal

11a_TX_CH_093_Vertical

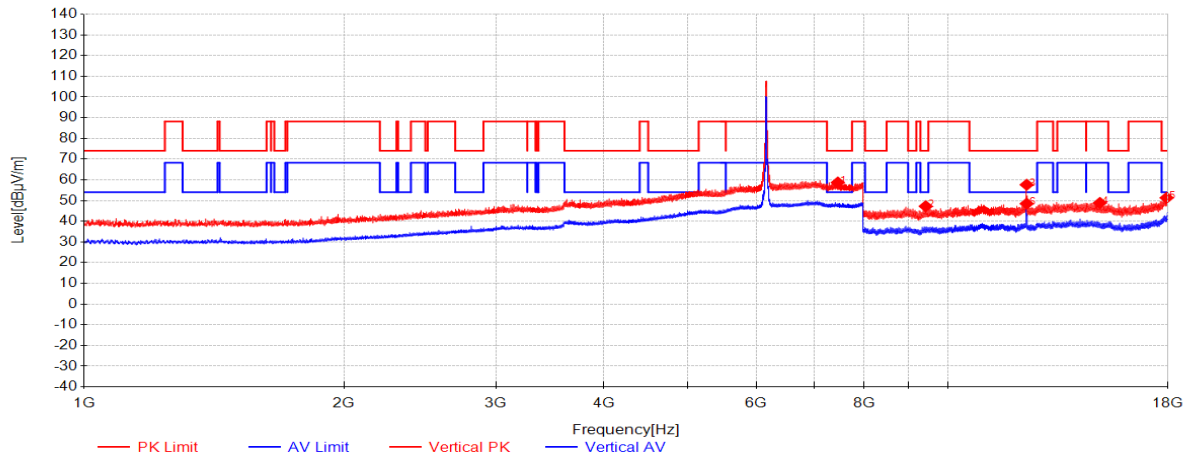


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7461.875	40.44	36.30	-18.03	58.71	74.00	15.29	Vertical
2	9434.3333	47.47	38.04	-38.28	47.23	74.00	26.77	Vertical
3	12349.3333	53.13	39.12	-34.63	57.62	74.00	16.38	Vertical
4	15012	43.03	39.78	-33.95	48.86	88.20	39.34	Vertical
5	17937.6667	40.73	41.52	-30.92	51.33	74.00	22.67	Vertical
6	12349.6667	43.99	39.12	-34.63	48.48	54.00	5.52	Vertical

11a_TX_CH_097_Horizontal

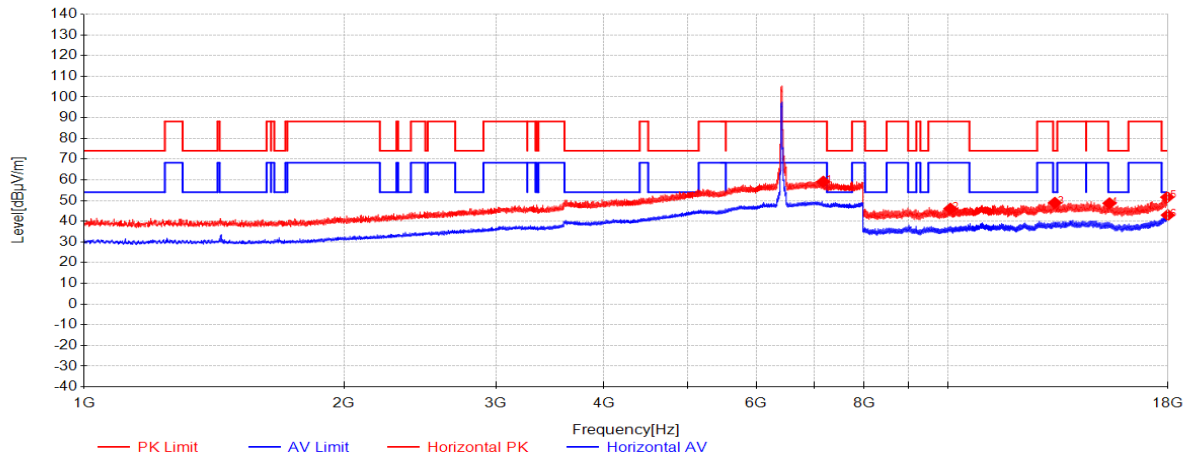


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7178.8125	40.57	36.30	-17.76	59.11	88.20	29.09	Horizontal
2	10076.3333	44.89	38.19	-37.03	46.05	88.20	42.15	Horizontal
3	13314.3333	43.57	40.06	-34.74	48.89	74.00	25.11	Horizontal
4	15401	43.00	39.08	-33.40	48.68	74.00	25.32	Horizontal
5	17970	40.83	41.61	-30.82	51.63	74.00	22.37	Horizontal
6	17993.3333	32.03	41.68	-30.74	42.97	54.00	11.03	Horizontal

11a_TX_CH_097_Vertical

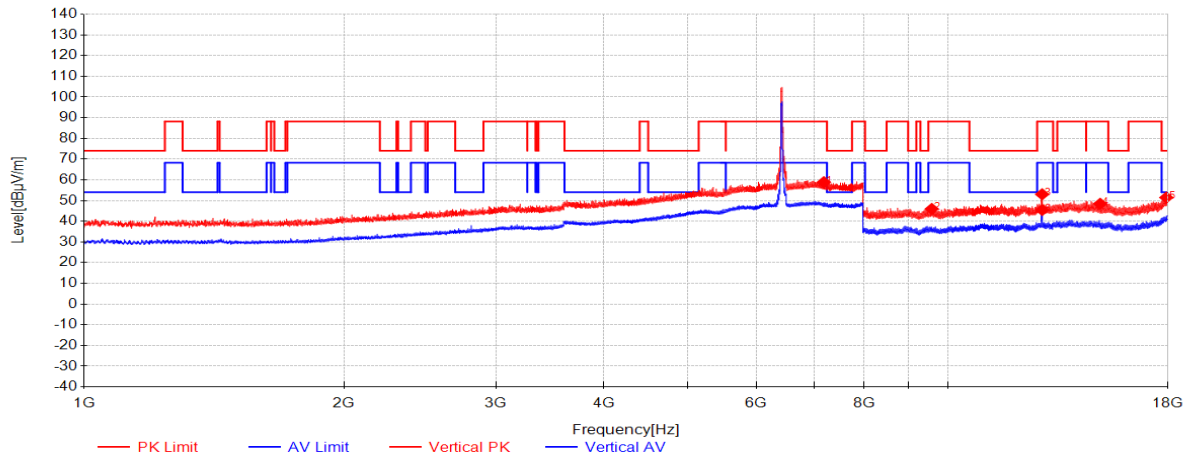


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7189.3125	40.38	36.30	-17.82	58.86	88.20	29.34	Vertical
2	9587	45.78	38.06	-37.88	45.96	88.20	42.24	Vertical
3	12869.3333	48.06	39.74	-34.77	53.03	88.20	35.17	Vertical
4	15023.3333	42.60	39.76	-33.93	48.42	88.20	39.78	Vertical
5	17922.3333	40.96	41.47	-30.97	51.47	74.00	22.53	Vertical
6	12872.3333	40.46	39.75	-34.78	45.43	68.20	22.77	Vertical

11a_TX_CH_105_Horizontal

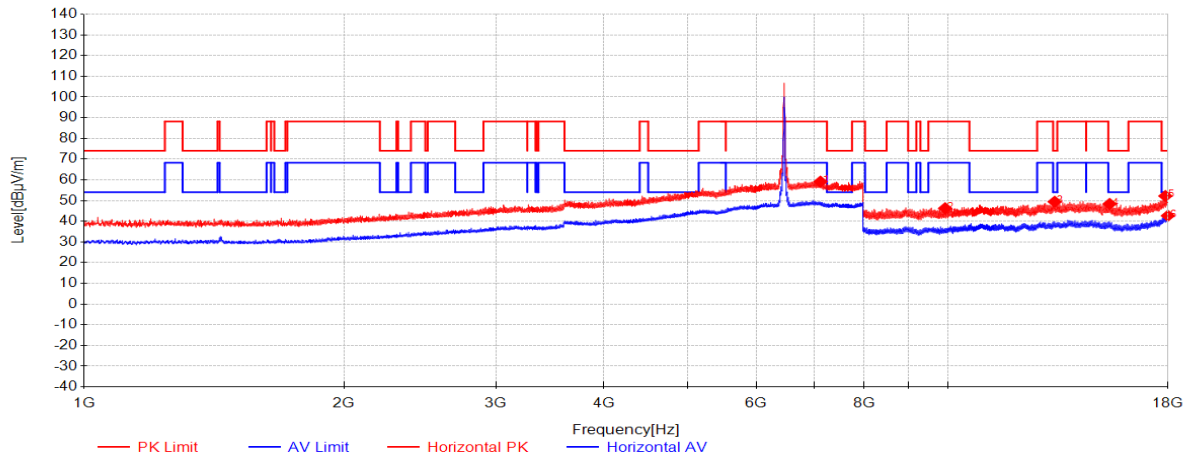


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7124.5625	40.27	36.30	-17.45	59.12	88.20	29.08	Horizontal
2	9935.6667	45.56	38.09	-37.38	46.28	88.20	41.92	Horizontal
3	13307.3333	44.09	40.05	-34.73	49.42	74.00	24.58	Horizontal
4	15405	42.66	39.07	-33.37	48.36	74.00	25.64	Horizontal
5	17876.6667	41.73	41.34	-30.87	52.20	74.00	21.80	Horizontal
6	17996.3333	31.70	41.69	-30.73	42.66	54.00	11.34	Horizontal

11a_TX_CH_105_Vertical

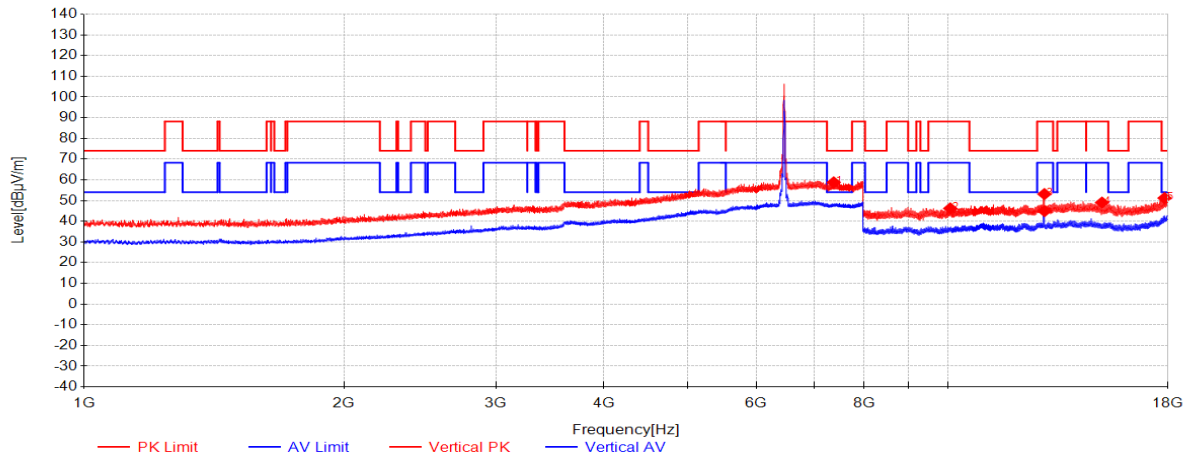


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7380.9375	40.23	36.30	-17.75	58.78	74.00	15.22	Vertical
2	10071.3333	45.06	38.19	-37.05	46.20	88.20	42.00	Vertical
3	12947.3333	48.14	39.84	-34.85	53.13	88.20	35.07	Vertical
4	15098	43.27	39.62	-33.85	49.04	88.20	39.16	Vertical
5	17837.6667	40.55	41.23	-30.59	51.19	74.00	22.81	Vertical
6	12951.3333	39.91	39.84	-34.85	44.90	68.20	23.30	Vertical

11a_TX_CH_113_Horizontal

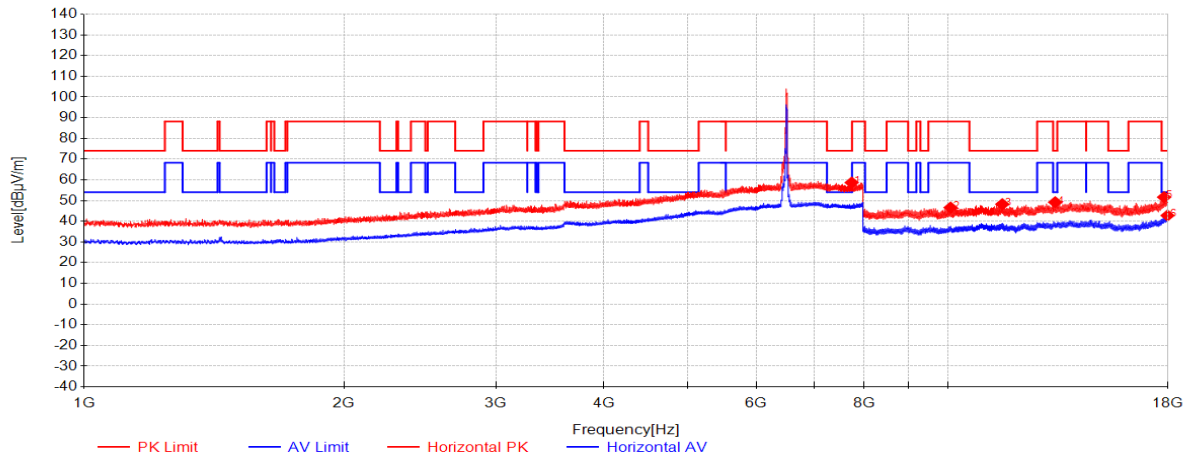


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7743.1875	40.55	36.79	-18.66	58.67	74.00	15.33	Horizontal
2	10082	45.41	38.20	-37.02	46.59	88.20	41.61	Horizontal
3	11572	44.27	38.96	-35.01	48.22	74.00	25.78	Horizontal
4	13324.3333	43.87	40.06	-34.76	49.17	74.00	24.83	Horizontal
5	17818.3333	40.91	41.17	-30.45	51.63	74.00	22.37	Horizontal
6	17980.6667	31.91	41.64	-30.78	42.77	54.00	11.23	Horizontal

11a_TX_CH_113_Veritical

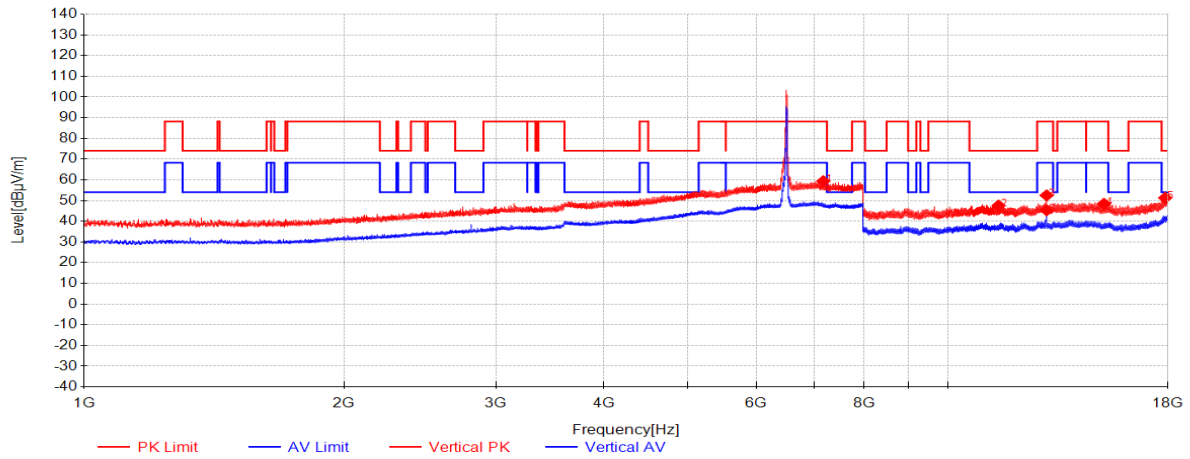


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7178.375	40.82	36.30	-17.76	59.36	88.20	28.84	Vertical
2	11455.3333	44.35	39.03	-35.79	47.59	74.00	26.41	Vertical
3	13023.6667	47.42	39.91	-34.83	52.50	88.20	35.70	Vertical
4	15176	42.37	39.48	-33.43	48.42	88.20	39.78	Vertical
5	17867.3333	40.80	41.32	-30.80	51.31	74.00	22.69	Vertical
6	13024	40.19	39.91	-34.83	45.27	68.20	22.93	Vertical

11a_TX_CH_117_Horizontal

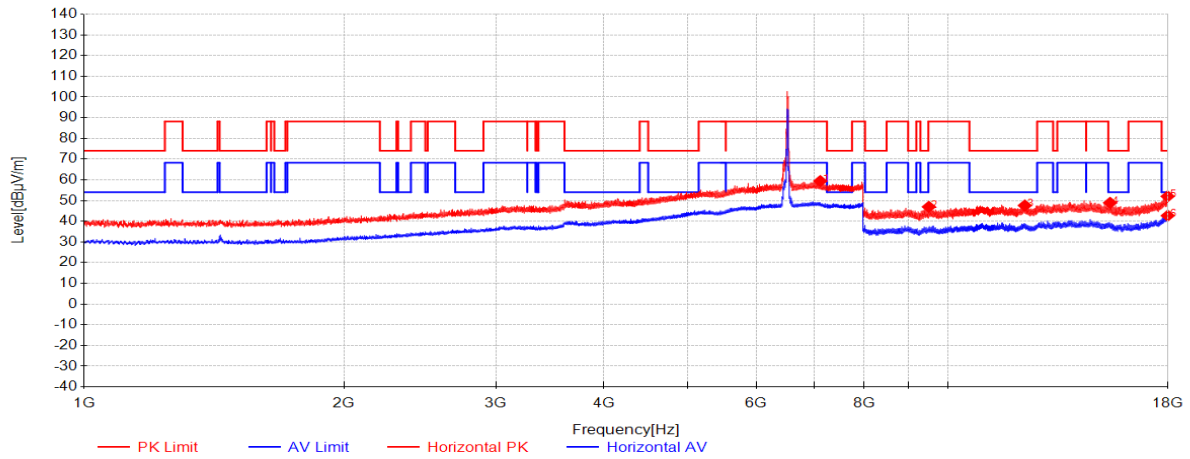


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7121.0625	40.54	36.30	-17.43	59.41	88.20	28.79	Horizontal
2	9514.3333	47.05	38.05	-38.14	46.96	88.20	41.24	Horizontal
3	12288.3333	42.92	39.05	-34.33	47.63	74.00	26.37	Horizontal
4	15426.6667	43.06	39.03	-33.19	48.90	74.00	25.10	Horizontal
5	17984.3333	41.16	41.65	-30.77	52.04	74.00	21.96	Horizontal
6	17991	31.78	41.67	-30.75	42.71	54.00	11.29	Horizontal

11a_TX_CH_117_Vertical

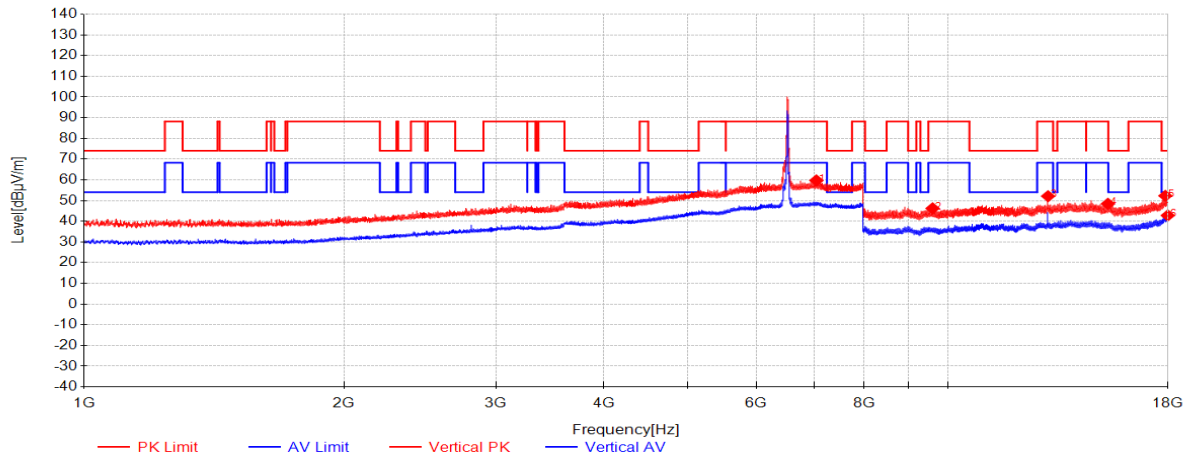


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7048.4375	40.72	36.30	-17.29	59.73	88.20	28.47	Vertical
2	9608.6667	45.97	38.06	-37.80	46.23	88.20	41.97	Vertical
3	13073.3333	46.95	39.94	-34.78	52.10	88.20	36.10	Vertical
4	15336.3333	42.59	39.19	-33.36	48.43	88.20	39.77	Vertical
5	17874.3333	41.80	41.34	-30.86	52.28	74.00	21.72	Vertical
6	17991.6667	31.86	41.68	-30.75	42.79	54.00	11.21	Vertical

11a_TX_CH_149_Horizontal

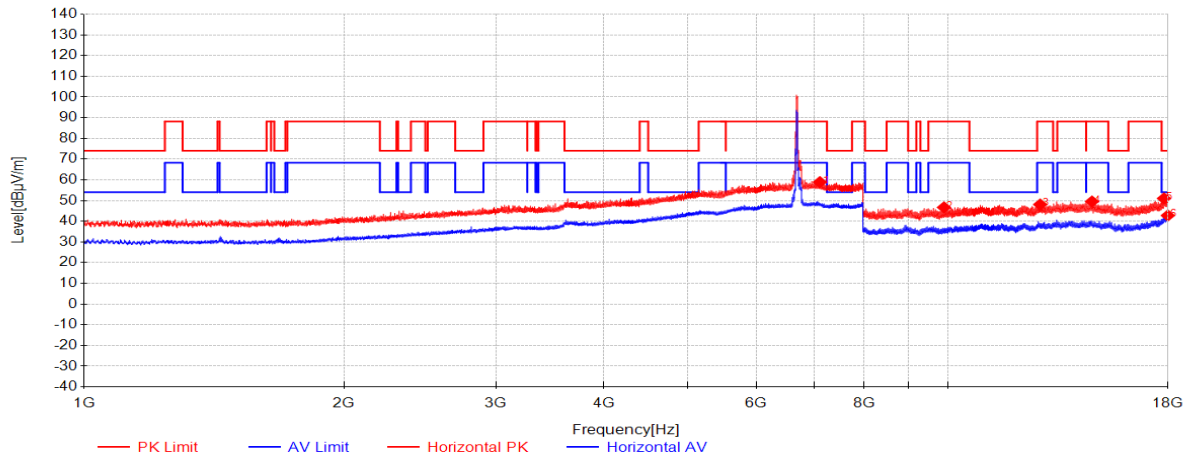


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7113.1875	40.00	36.30	-17.39	58.91	88.20	29.29	Horizontal
2	9906	46.04	38.09	-37.45	46.68	88.20	41.52	Horizontal
3	12801	43.00	39.66	-34.59	48.07	88.20	40.13	Horizontal
4	14700.3333	43.10	39.98	-33.54	49.54	88.20	38.66	Horizontal
5	17811.6667	40.27	41.15	-30.40	51.02	74.00	22.98	Horizontal
6	17996.6667	31.81	41.69	-30.73	42.77	54.00	11.23	Horizontal

11a_TX_CH_149_Veritical

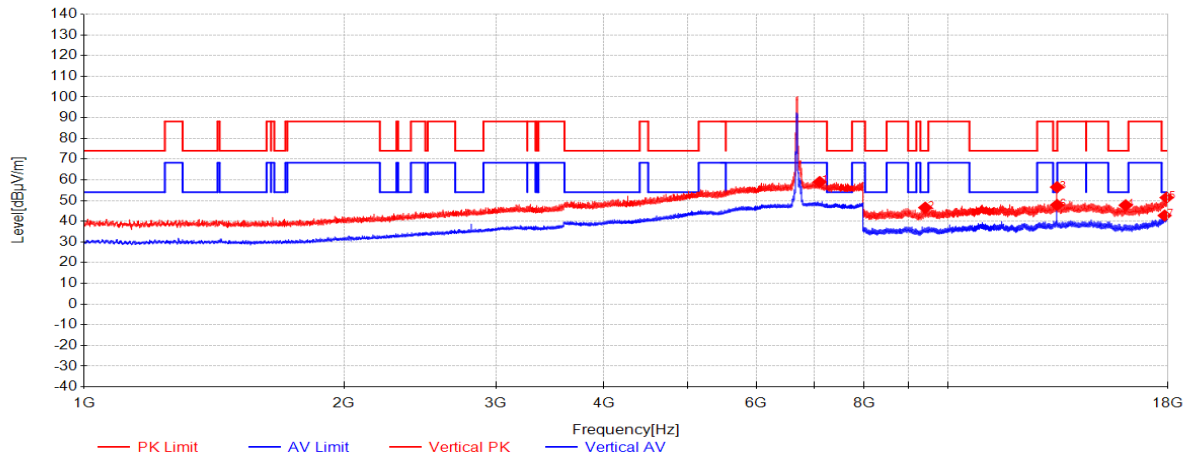


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7109.6875	40.04	36.30	-17.37	58.97	88.20	29.23	Vertical
2	9422	46.83	38.04	-38.30	46.57	74.00	27.43	Vertical
3	13391	51.27	40.10	-34.91	56.46	74.00	17.54	Vertical
4	16080.6667	41.81	38.06	-32.16	47.72	74.00	26.28	Vertical
5	17937.6667	40.82	41.52	-30.92	51.42	74.00	22.58	Vertical
6	13392	42.69	40.10	-34.91	47.87	54.00	6.13	Vertical
7	17842	32.16	41.24	-30.62	42.78	54.00	11.22	Vertical

11a_TX_CH_185_Horizontal

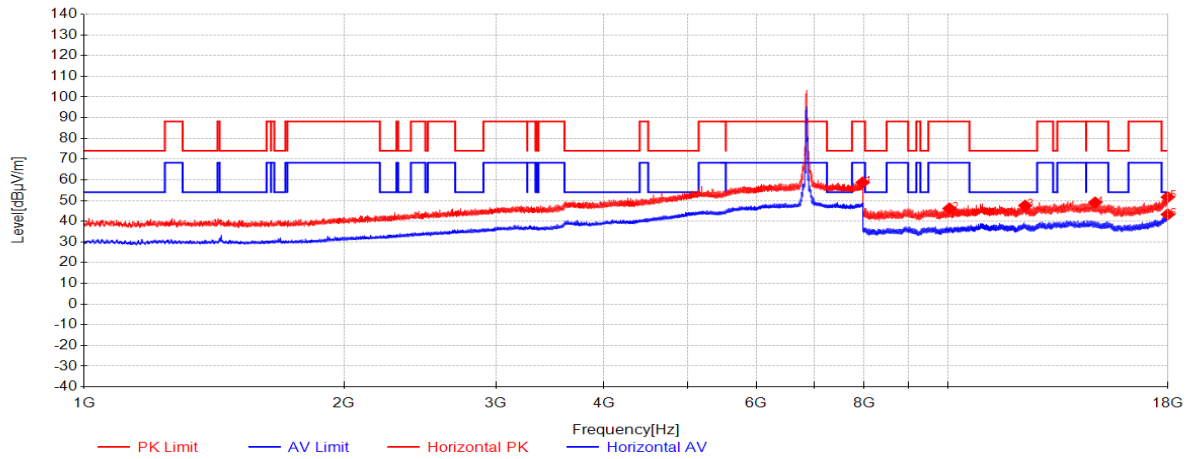


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7972	40.27	37.24	-18.80	58.71	88.20	29.49	Horizontal
2	10051.3333	45.09	38.16	-37.09	46.16	88.20	42.04	Horizontal
3	12299.3333	42.75	39.06	-34.24	47.57	74.00	26.43	Horizontal
4	14823	43.08	39.91	-33.94	49.05	88.20	39.15	Horizontal
5	17991.3333	40.74	41.67	-30.75	51.67	74.00	22.33	Horizontal
6	17992	32.37	41.68	-30.75	43.30	54.00	10.70	Horizontal

11a_TX_CH_185_Vertical

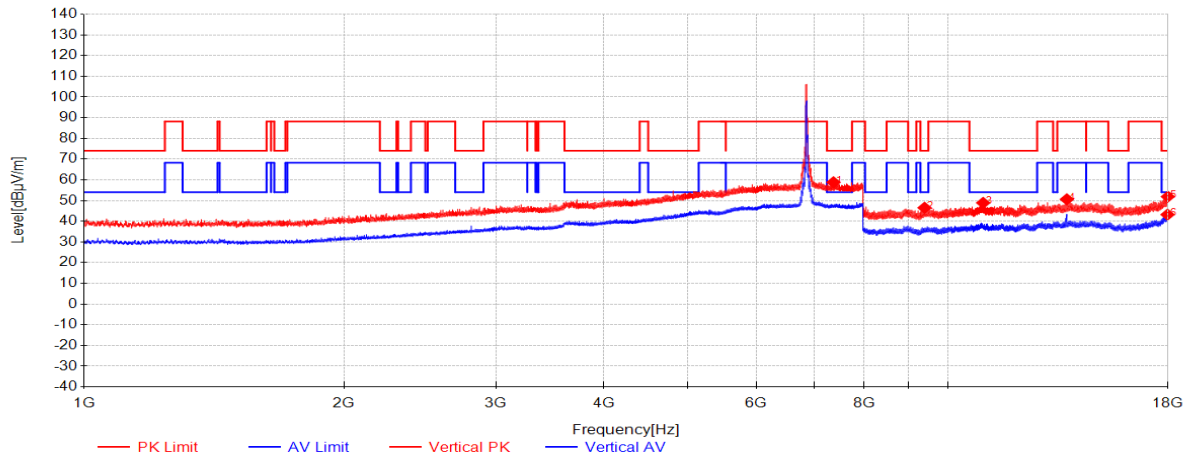


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7376.125	40.26	36.30	-17.75	58.81	74.00	15.19	Vertical
2	9405.3333	46.78	38.04	-38.32	46.50	74.00	27.50	Vertical
3	10995.3333	45.25	39.29	-35.67	48.88	74.00	25.12	Vertical
4	13743.6667	45.16	40.27	-34.85	50.59	88.20	37.61	Vertical
5	17997	40.93	41.69	-30.73	51.89	74.00	22.11	Vertical
6	17979.6667	32.33	41.64	-30.79	43.19	54.00	10.81	Vertical

11a_TX_CH_189_Horizontal

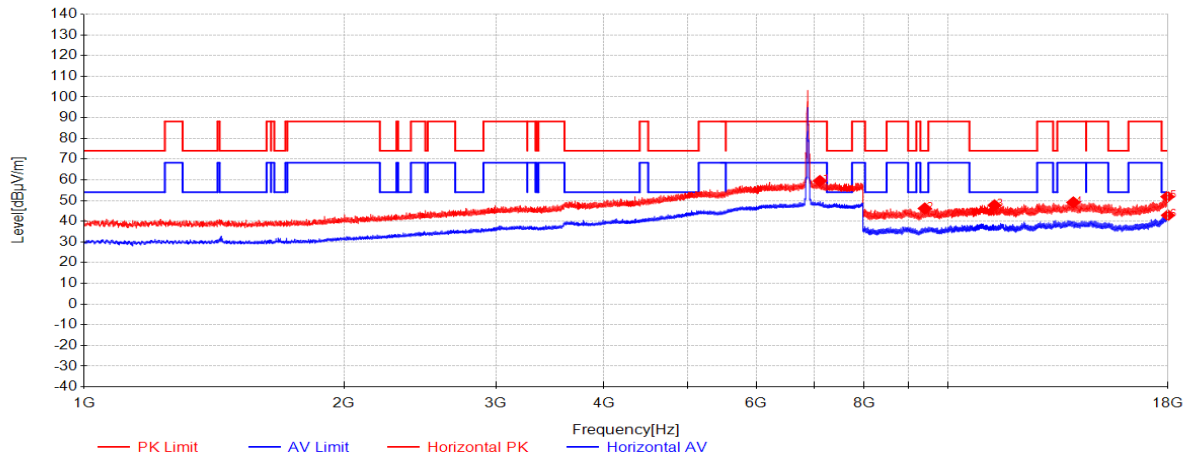


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7114.0625	40.54	36.30	-17.39	59.45	88.20	28.75	Horizontal
2	9410.3333	46.44	38.04	-38.32	46.17	74.00	27.83	Horizontal
3	11333.3333	44.07	39.10	-35.49	47.68	74.00	26.32	Horizontal
4	13984.6667	43.62	40.39	-34.90	49.11	88.20	39.09	Horizontal
5	17978.6667	41.03	41.64	-30.79	51.88	74.00	22.12	Horizontal
6	17999	31.91	41.70	-30.72	42.88	54.00	11.12	Horizontal

11a_TX_CH_189_Veritical

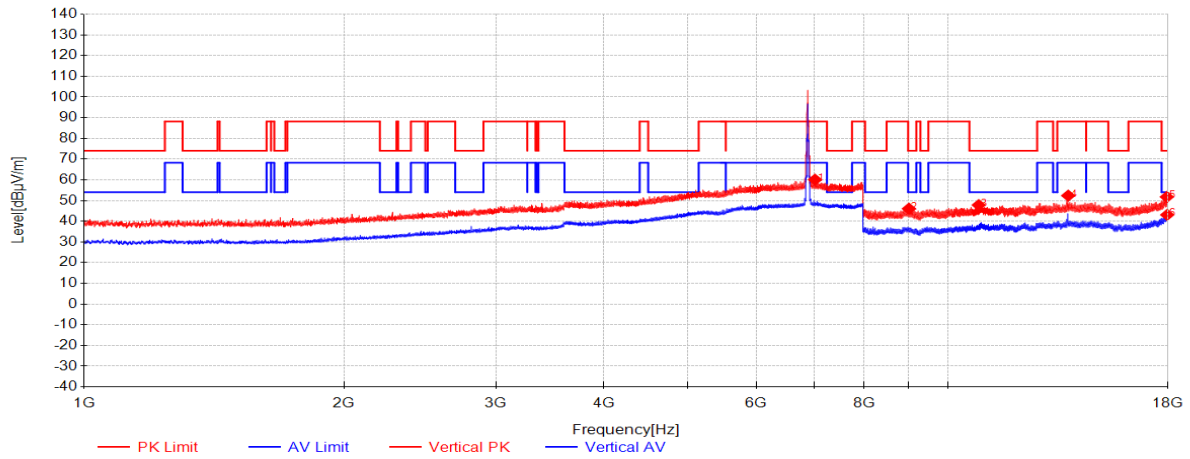


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7021.75	41.07	36.30	-17.28	60.09	88.20	28.11	Vertical
2	9020	46.73	38.00	-38.67	46.07	74.00	27.93	Vertical
3	10865.6667	44.81	39.14	-36.14	47.81	74.00	26.19	Vertical
4	13797.3333	46.95	40.30	-34.88	52.37	88.20	35.83	Vertical
5	17947.6667	41.09	41.55	-30.89	51.75	74.00	22.25	Vertical
6	17964.6667	32.33	41.60	-30.83	43.09	54.00	10.91	Vertical

11a_TX_CH_209_Horizontal

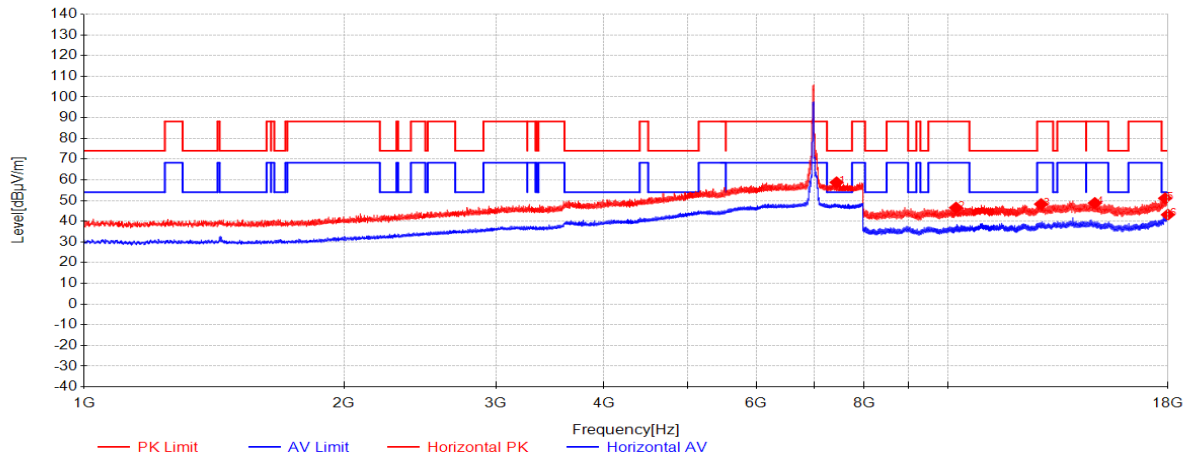


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7437.8125	40.38	36.30	-17.92	58.76	74.00	15.24	Horizontal
2	10228	44.83	38.37	-36.67	46.54	88.20	41.66	Horizontal
3	12833	43.25	39.70	-34.68	48.27	88.20	39.93	Horizontal
4	14811.3333	42.92	39.91	-34.03	48.80	88.20	39.40	Horizontal
5	17864	40.57	41.31	-30.78	51.09	74.00	22.91	Horizontal
6	17996.6667	32.20	41.69	-30.73	43.16	54.00	10.84	Horizontal

11a_TX_CH_209_Vertical

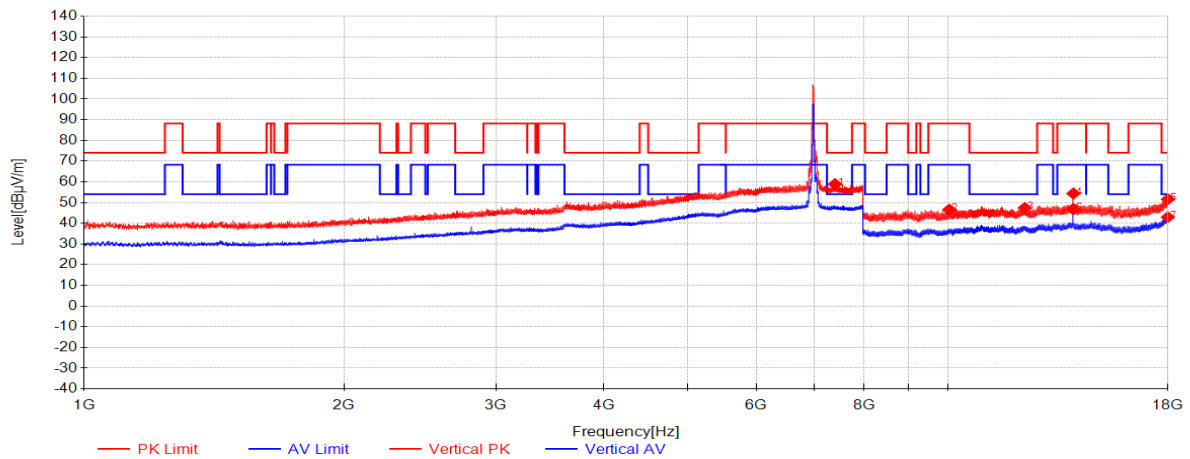


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7407.625	40.38	36.30	-17.79	58.89	74.00	15.11	Vertical
2	10045	45.53	38.15	-37.11	46.58	88.20	41.62	Vertical
3	12286.3333	42.72	39.04	-34.35	47.41	74.00	26.59	Vertical
4	13987.3333	48.90	40.39	-34.92	54.37	88.20	33.83	Vertical
5	17999.3333	40.62	41.70	-30.72	51.60	74.00	22.40	Vertical
6	13988.6667	41.36	40.39	-34.93	46.82	68.20	21.38	Vertical
7	17995.3333	32.01	41.69	-30.73	42.96	54.00	11.04	Vertical

11a_TX_CH_233_Horizontal

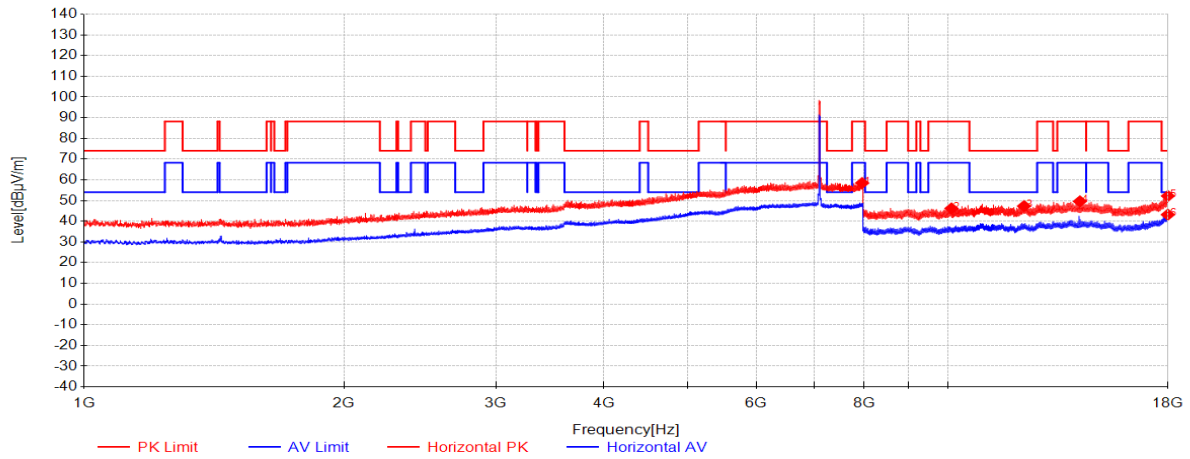


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7962.8125	40.05	37.23	-18.81	58.47	88.20	29.73	Horizontal
2	10104.6667	44.95	38.23	-36.96	46.21	88.20	41.99	Horizontal
3	12263.6667	42.87	39.02	-34.56	47.33	74.00	26.67	Horizontal
4	14231.6667	44.26	40.26	-34.90	49.62	88.20	38.58	Horizontal
5	17998.6667	41.25	41.70	-30.72	52.22	74.00	21.78	Horizontal
6	17996	32.21	41.69	-30.73	43.17	54.00	10.83	Horizontal

11a_TX_CH_233_Vertical

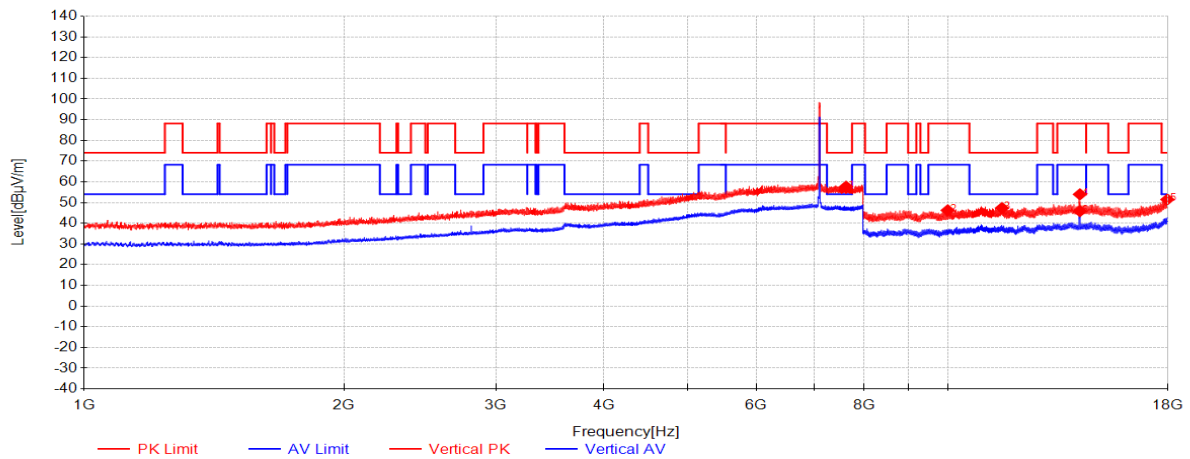


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7628.5625	39.61	36.56	-18.49	57.68	74.00	16.32	Vertical
2	10006	45.34	38.11	-37.20	46.25	88.20	41.95	Vertical
3	11562	43.48	38.96	-35.11	47.33	74.00	26.67	Vertical
4	14232.3333	48.61	40.26	-34.90	53.97	88.20	34.23	Vertical
5	17972.3333	40.69	41.62	-30.81	51.50	74.00	22.50	Vertical
6	14232.6667	40.47	40.26	-34.90	45.83	68.20	22.37	Vertical

11be(EHT20)_TX_CH_001_Horizontal

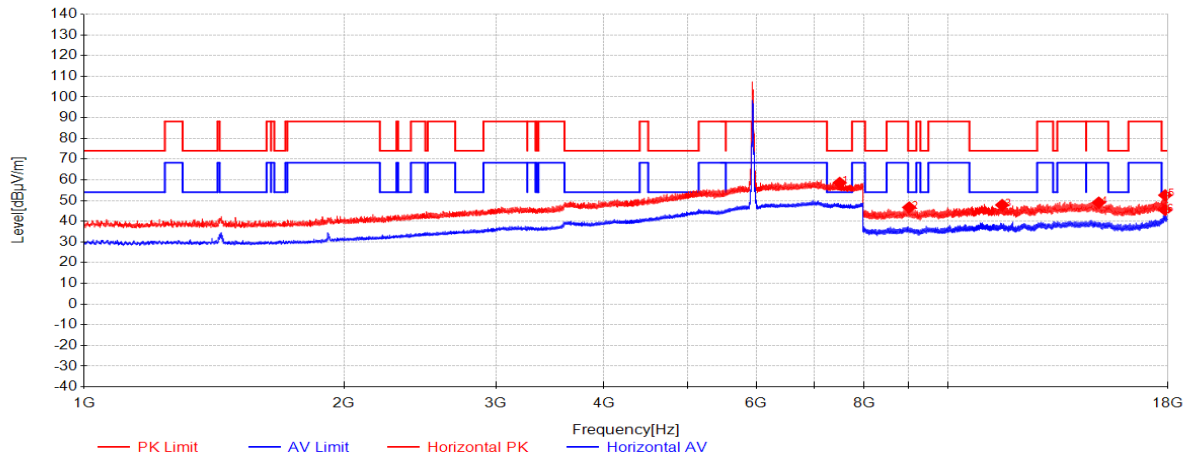


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7499.0625	40.48	36.30	-18.21	58.57	74.00	15.43	Horizontal
2	9026.3333	47.41	38.00	-38.71	46.70	74.00	27.30	Horizontal
3	11568.3333	43.97	38.96	-35.05	47.88	74.00	26.12	Horizontal
4	14967.3333	43.00	39.82	-33.76	49.06	88.20	39.14	Horizontal
5	17869.6667	42.08	41.32	-30.82	52.58	74.00	21.42	Horizontal
6	17867.6667	34.90	41.32	-30.81	45.41	54.00	8.59	Horizontal

11be(EHT20)_TX_CH_001_Vertical

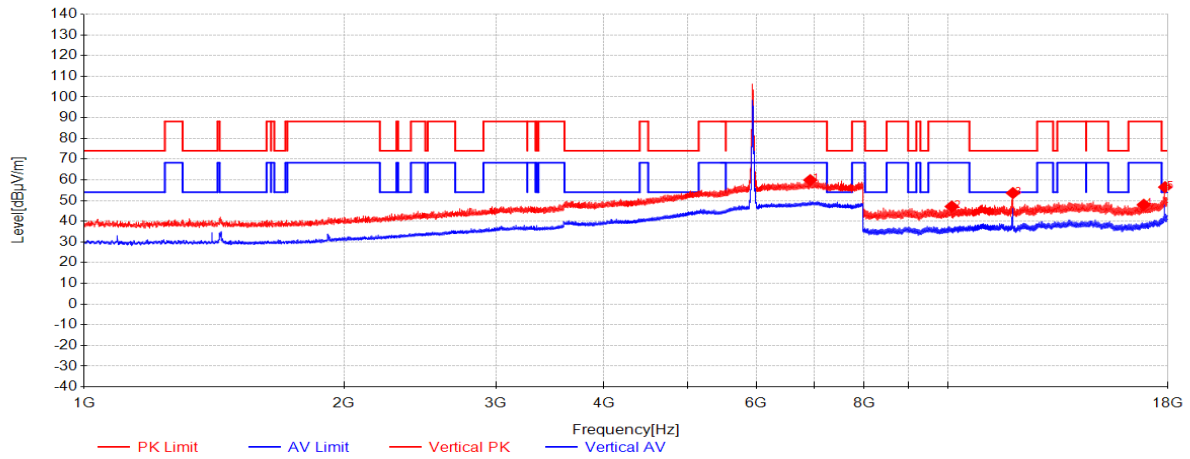


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6933.375	41.05	36.19	-17.36	59.89	88.20	28.31	Vertical
2	10113	45.80	38.24	-36.93	47.11	88.20	41.09	Vertical
3	11906.6667	49.68	38.76	-34.82	53.61	74.00	20.39	Vertical
4	16872.3333	41.46	38.70	-32.17	47.99	88.20	40.21	Vertical
5	17867	45.96	41.31	-30.80	56.47	74.00	17.53	Vertical

11be(EHT20)_TX_CH_045_Horizontal

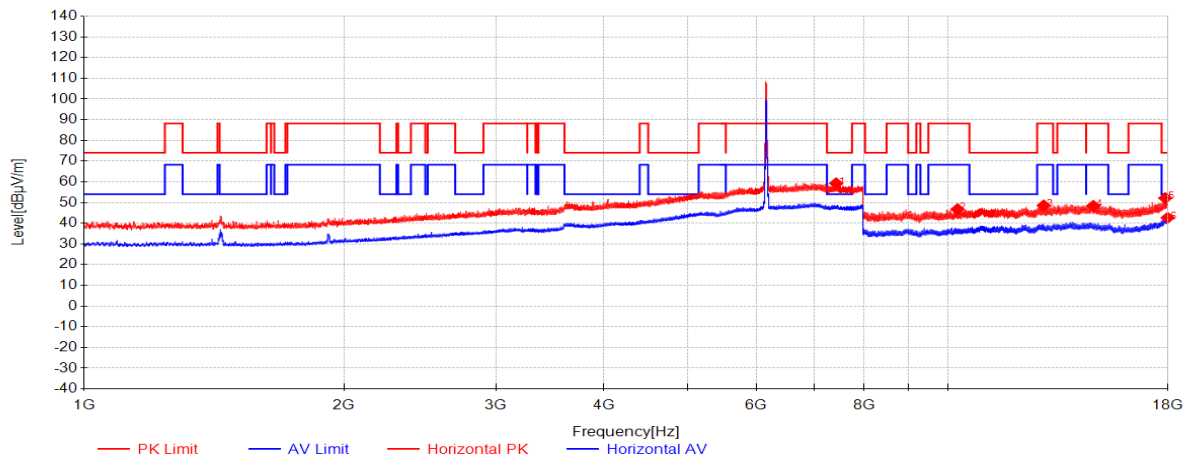


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7429.5	40.87	36.30	-17.89	59.28	74.00	14.72	Horizontal
2	10270	45.15	38.42	-36.78	46.79	88.20	41.41	Horizontal
3	12923.3333	43.66	39.81	-34.85	48.62	88.20	39.58	Horizontal
4	14751.3333	42.28	39.95	-33.84	48.39	88.20	39.81	Horizontal
5	17870.3333	41.66	41.32	-30.83	52.16	74.00	21.84	Horizontal
6	17987.6667	31.74	41.66	-30.76	42.64	54.00	11.36	Horizontal

11be(EHT20)_TX_CH_045_Vertical

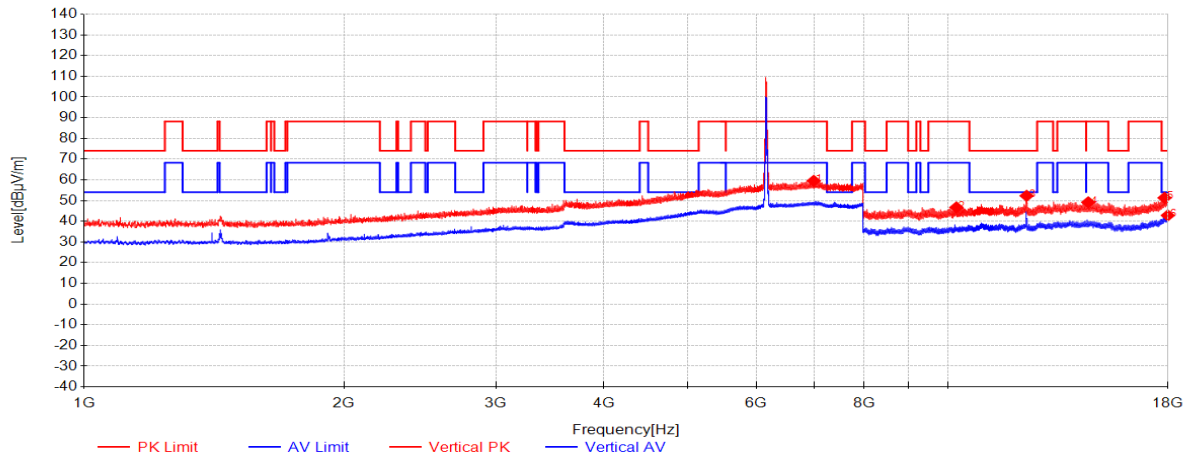


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6997.6875	40.52	36.30	-17.27	59.54	88.20	28.66	Vertical
2	10237.6667	44.99	38.39	-36.69	46.68	88.20	41.52	Vertical
3	12347.3333	47.80	39.12	-34.61	52.30	74.00	21.70	Vertical
4	14553	43.51	40.07	-34.44	49.14	88.20	39.06	Vertical
5	17839	40.67	41.23	-30.60	51.30	74.00	22.70	Vertical
6	17993.6667	31.87	41.68	-30.74	42.81	54.00	11.19	Vertical

11be(EHT20)_TX_CH_093_Horizontal

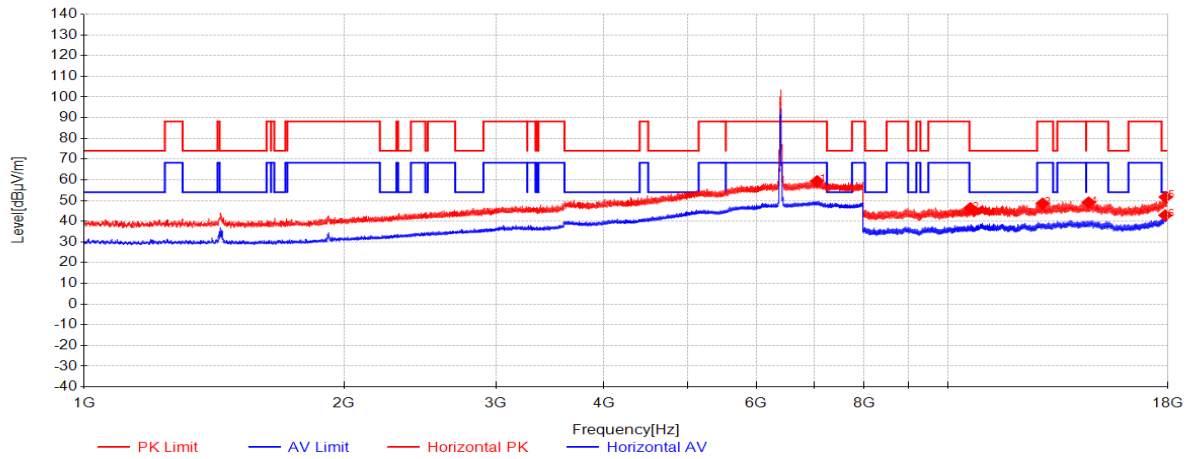


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7061.5625	40.38	36.30	-17.29	59.39	88.20	28.81	Horizontal
2	10626.3333	43.84	38.85	-36.36	46.33	74.00	27.67	Horizontal
3	12885.6667	43.61	39.76	-34.81	48.56	88.20	39.64	Horizontal
4	14565	43.40	40.06	-34.39	49.07	88.20	39.13	Horizontal
5	17891.3333	41.26	41.38	-30.98	51.67	74.00	22.33	Horizontal
6	17875	32.41	41.34	-30.86	42.89	54.00	11.11	Horizontal

11be(EHT20)_TX_CH_093_Vertical

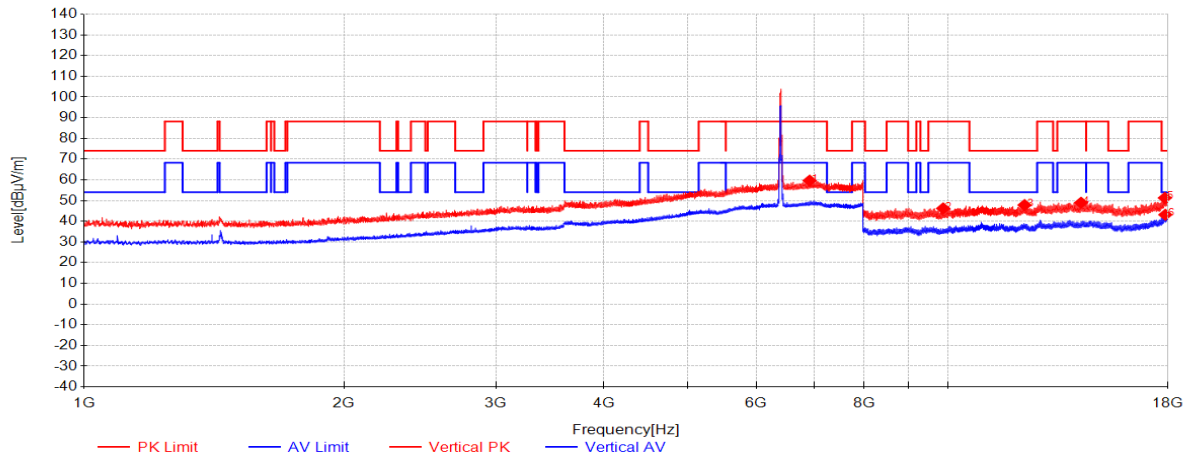


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6922.4375	40.85	36.18	-17.37	59.66	88.20	28.54	Vertical
2	9884	45.55	38.09	-37.45	46.19	88.20	42.01	Vertical
3	12279.6667	43.20	39.04	-34.41	47.82	74.00	26.18	Vertical
4	14276.3333	43.37	40.23	-34.64	48.96	88.20	39.24	Vertical
5	17852.3333	40.72	41.27	-30.70	51.29	74.00	22.71	Vertical
6	17874.3333	32.67	41.34	-30.86	43.15	54.00	10.85	Vertical

11be(EHT20)_TX_CH_097_Horizontal

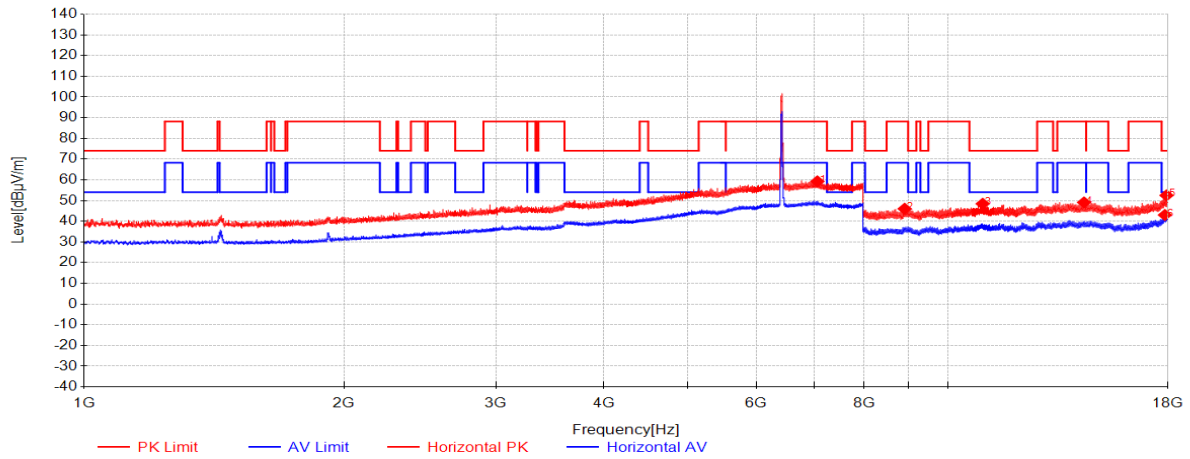


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7066.375	40.25	36.30	-17.30	59.25	88.20	28.95	Horizontal
2	8917.3333	47.01	37.94	-38.94	46.02	88.20	42.18	Horizontal
3	10981	44.89	39.28	-35.71	48.45	74.00	25.55	Horizontal
4	14390.3333	42.74	40.17	-33.81	49.09	88.20	39.11	Horizontal
5	17932.3333	41.93	41.50	-30.94	52.50	74.00	21.50	Horizontal
6	17854	32.45	41.28	-30.71	43.02	54.00	10.98	Horizontal

11be(EHT20)_TX_CH_097_Vertical

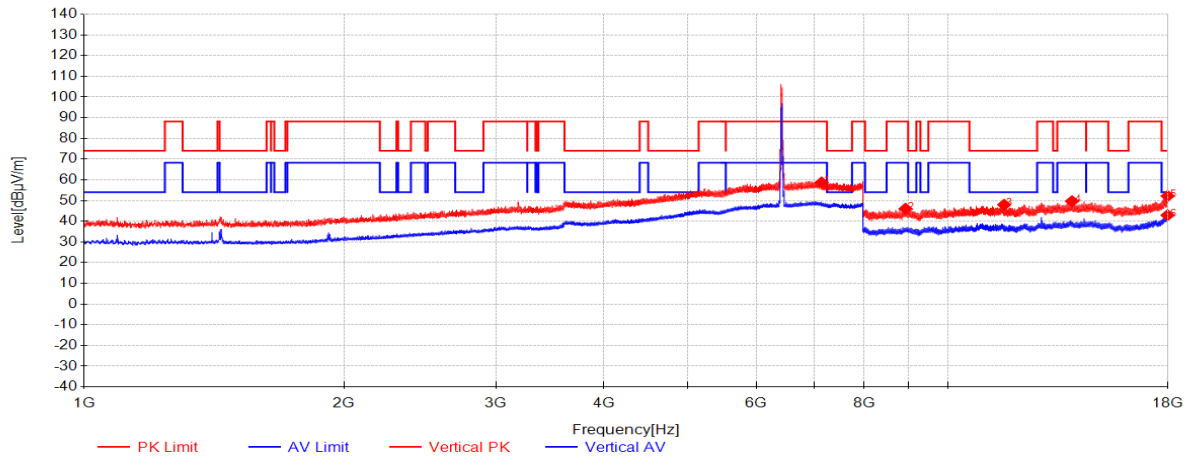


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7146.4375	39.99	36.30	-17.57	58.72	88.20	29.48	Vertical
2	8939.3333	46.92	37.96	-38.83	46.05	88.20	42.15	Vertical
3	11628.6667	44.02	38.92	-34.98	47.97	74.00	26.03	Vertical
4	13937	43.89	40.37	-34.57	49.69	88.20	38.51	Vertical
5	17986	41.31	41.66	-30.76	52.20	74.00	21.80	Vertical
6	17982.3333	32.04	41.65	-30.78	42.91	54.00	11.09	Vertical

11be(EHT20)_TX_CH_105_Horizontal

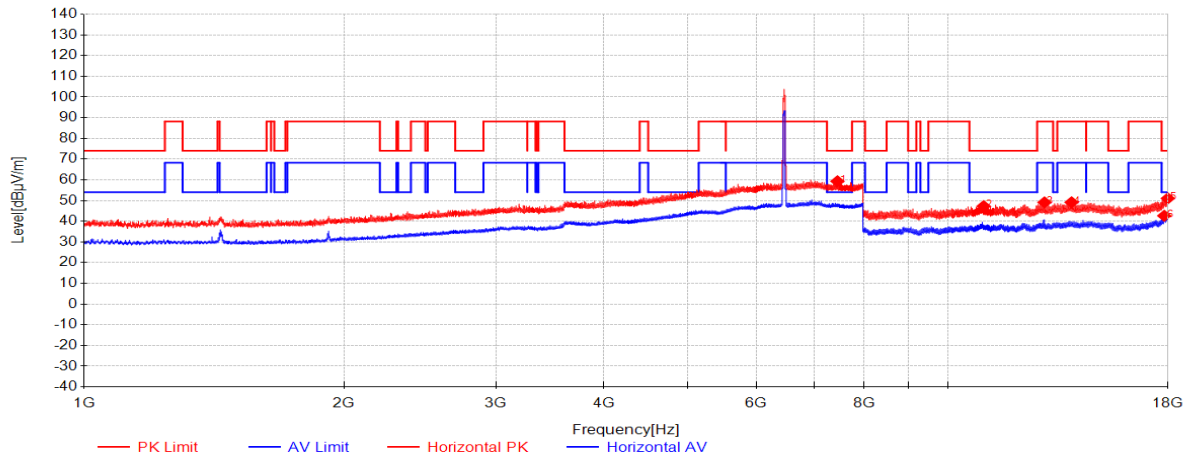


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7454.875	41.02	36.30	-18.00	59.32	74.00	14.68	Horizontal
2	11008.3333	43.65	39.29	-35.64	47.30	74.00	26.70	Horizontal
3	12949.3333	44.12	39.84	-34.85	49.11	88.20	39.09	Horizontal
4	13918.3333	43.24	40.36	-34.44	49.16	88.20	39.04	Horizontal
5	17995	40.10	41.69	-30.74	51.05	74.00	22.95	Horizontal
6	17821.6667	31.95	41.18	-30.48	42.66	54.00	11.34	Horizontal

11be(EHT20)_TX_CH_105_Vertical

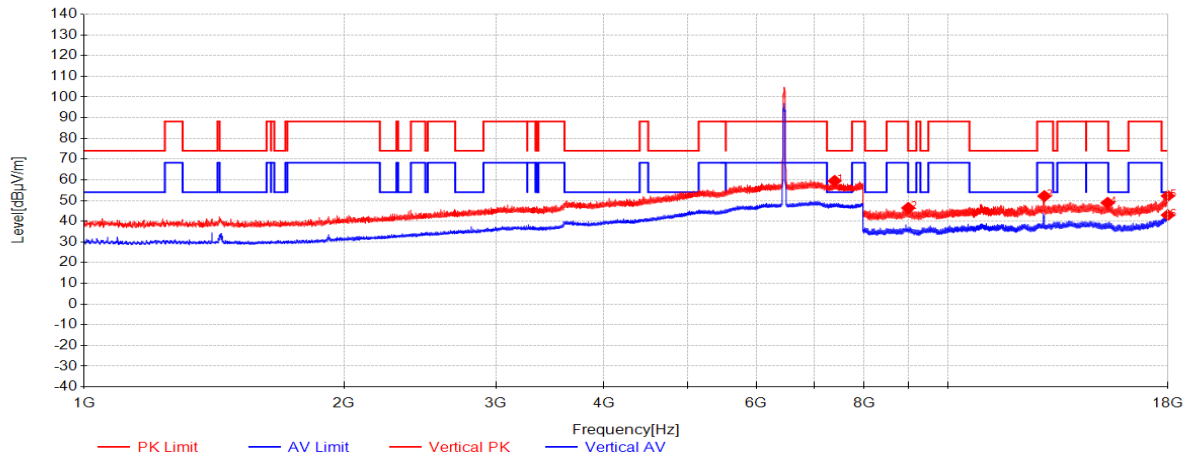


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7398.4375	40.94	36.30	-17.75	59.49	74.00	14.51	Vertical
2	9005.3333	47.00	38.00	-38.57	46.43	74.00	27.57	Vertical
3	12945.6667	47.18	39.83	-34.85	52.16	88.20	36.04	Vertical
4	15324.3333	43.02	39.22	-33.35	48.89	88.20	39.31	Vertical
5	17997.3333	41.30	41.69	-30.73	52.26	74.00	21.74	Vertical
6	17997.6667	32.01	41.69	-30.73	42.98	54.00	11.02	Vertical

11be(EHT20)_TX_CH_113_Horizontal

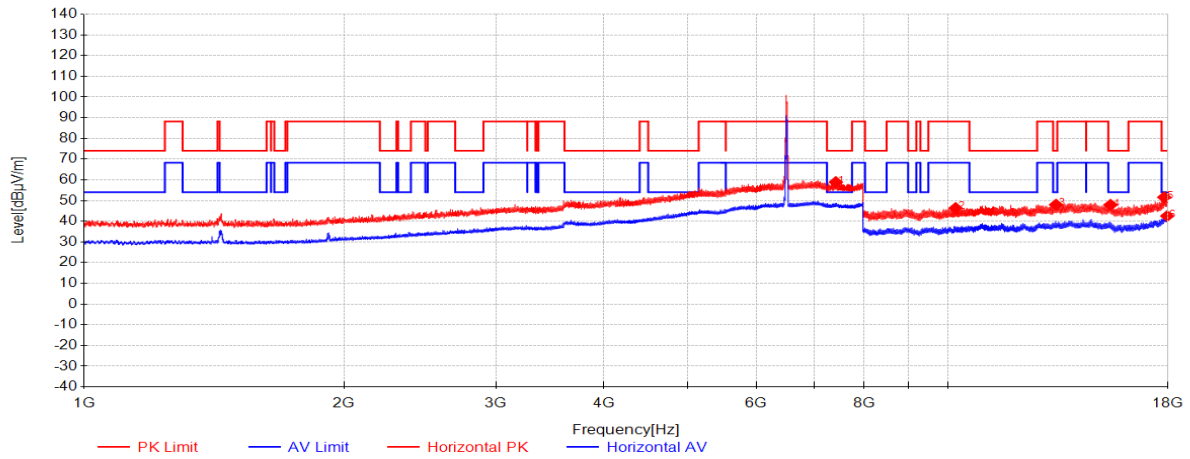


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7422.9375	40.47	36.30	-17.86	58.91	74.00	15.09	Horizontal
2	10216	44.64	38.36	-36.63	46.37	88.20	41.83	Horizontal
3	13352.6667	42.72	40.08	-34.83	47.97	74.00	26.03	Horizontal
4	15444	41.97	39.00	-33.05	47.92	74.00	26.08	Horizontal
5	17825.3333	40.89	41.19	-30.50	51.58	74.00	22.42	Horizontal
6	17962	31.77	41.59	-30.84	42.52	54.00	11.48	Horizontal

11be(EHT20)_TX_CH_113_Vertical

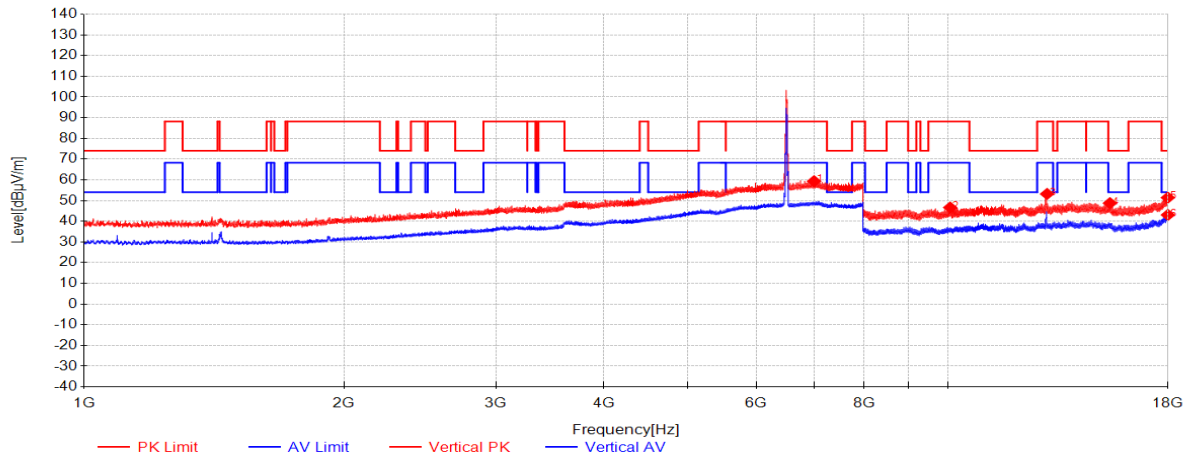


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7003.375	40.31	36.30	-17.27	59.34	88.20	28.86	Vertical
2	10070	45.48	38.18	-37.05	46.62	88.20	41.58	Vertical
3	13038	48.10	39.92	-34.82	53.20	88.20	35.00	Vertical
4	15418.6667	42.94	39.05	-33.26	48.73	74.00	25.27	Vertical
5	17994.3333	40.45	41.68	-30.74	51.40	74.00	22.60	Vertical
6	17997.3333	32.09	41.69	-30.73	43.05	54.00	10.95	Vertical

11be(EHT20)_TX_CH_117_Horizontal

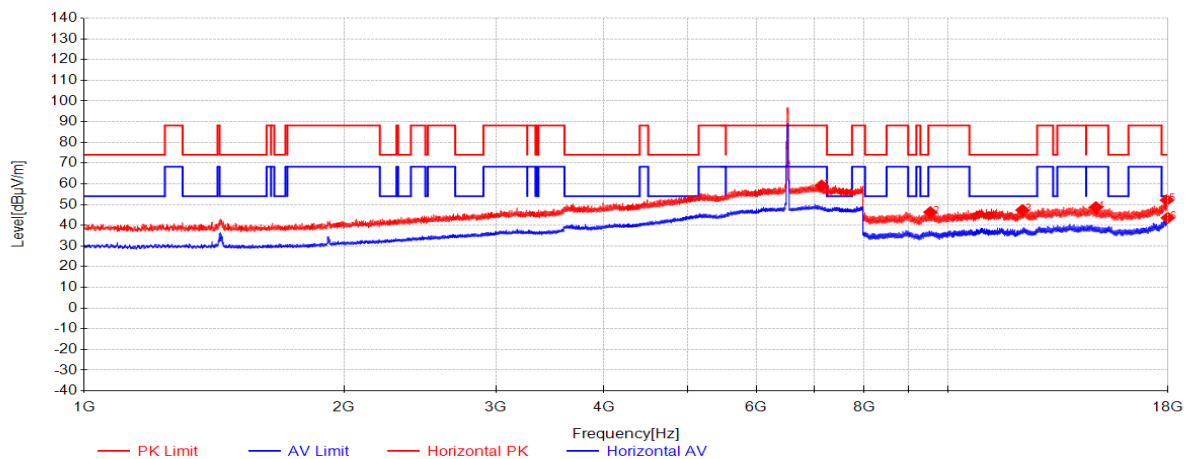


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7144.6875	40.43	36.30	-17.56	59.17	88.20	29.03	Horizontal
2	9551	46.25	38.06	-38.01	46.30	88.20	41.90	Horizontal
3	12212.3333	43.40	38.95	-35.02	47.34	74.00	26.66	Horizontal
4	14853.6667	42.52	39.89	-33.70	48.71	88.20	39.49	Horizontal
5	17948.3333	41.46	41.55	-30.89	52.12	74.00	21.88	Horizontal
6	17995	32.66	41.69	-30.74	43.61	54.00	10.39	Horizontal

11be(EHT20)_TX_CH_117_Vertical

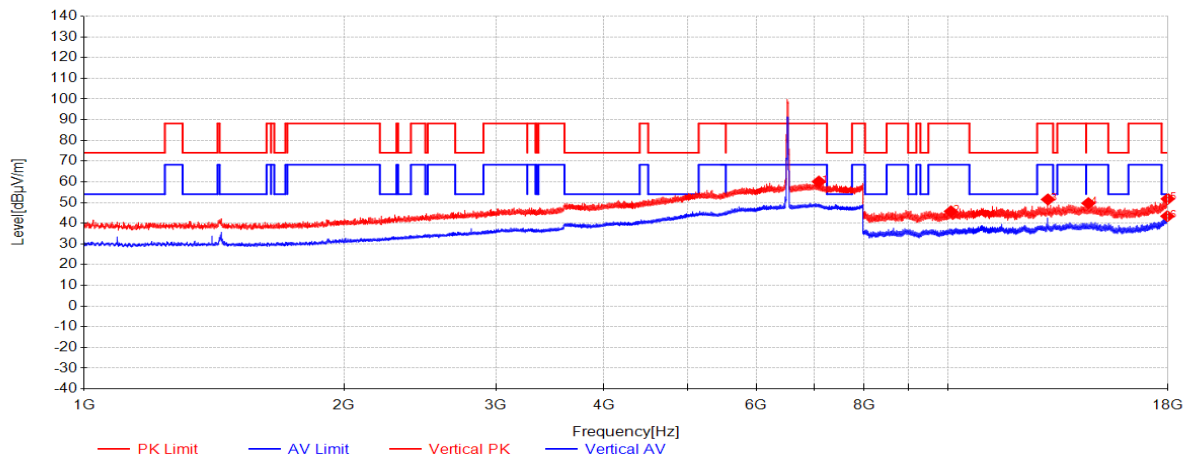


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7093.5	41.12	36.30	-17.31	60.11	88.20	28.09	Vertical
2	10090.6667	44.52	38.21	-37.00	45.73	88.20	42.47	Vertical
3	13069	46.34	39.93	-34.79	51.49	88.20	36.71	Vertical
4	14559.6667	44.02	40.06	-34.42	49.67	88.20	38.53	Vertical
5	17992	40.86	41.68	-30.75	51.79	74.00	22.21	Vertical
6	17972.3333	32.59	41.62	-30.81	43.40	54.00	10.60	Vertical

11be(EHT20)_TX_CH_149_Horizontal

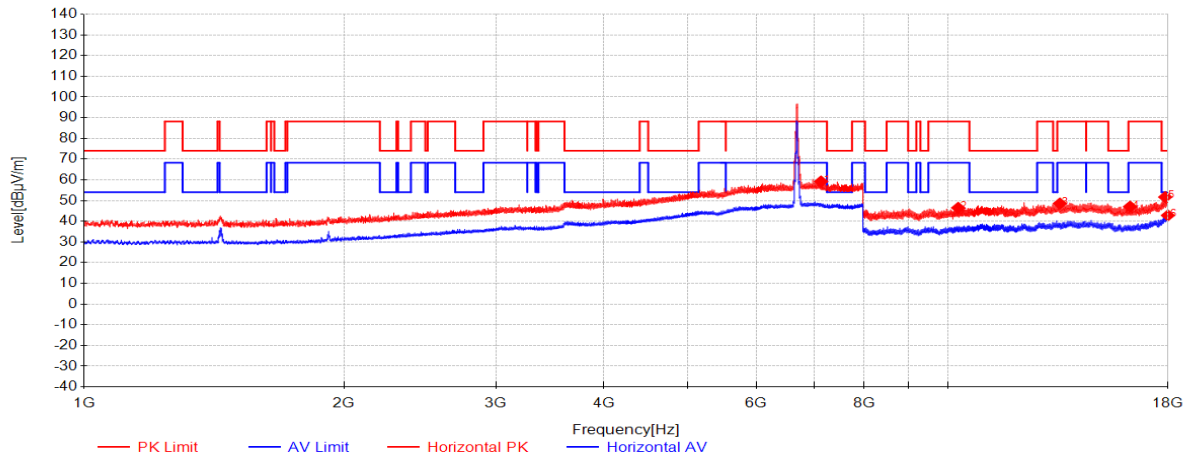


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7135.0625	40.41	36.30	-17.51	59.20	88.20	29.00	Horizontal
2	10288	44.86	38.45	-36.83	46.48	88.20	41.72	Horizontal
3	13491.3333	42.95	40.15	-34.53	48.57	88.20	39.63	Horizontal
4	16269.3333	41.33	38.22	-32.50	47.05	88.20	41.15	Horizontal
5	17869.6667	41.18	41.32	-30.82	51.68	74.00	22.32	Horizontal
6	17999.3333	31.85	41.70	-30.72	42.83	54.00	11.17	Horizontal

11be(EHT20)_TX_CH_149_Vertical

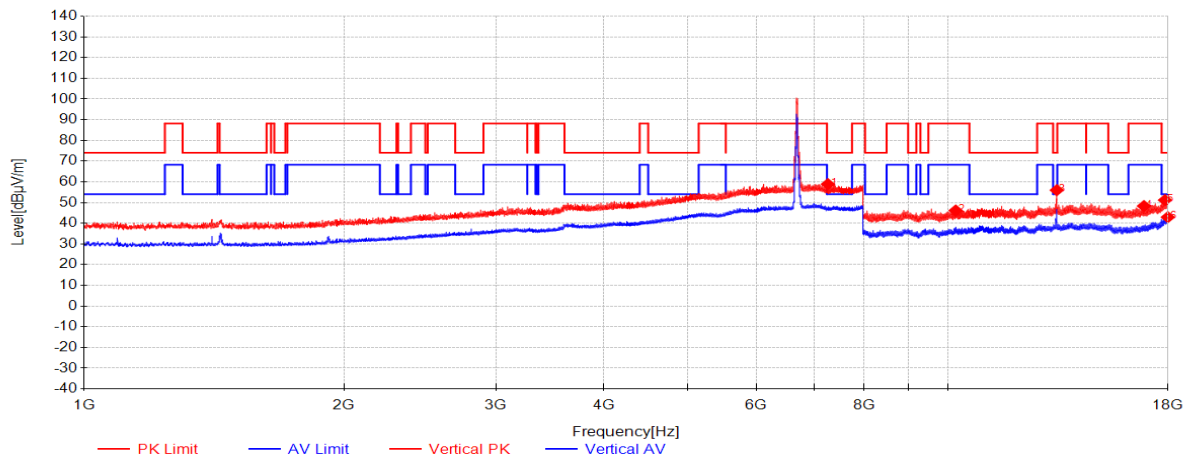


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7268.5	40.37	36.30	-17.79	58.88	74.00	15.12	Vertical
2	10219.3333	44.44	38.36	-36.64	46.16	88.20	42.04	Vertical
3	13381.6667	50.79	40.09	-34.89	55.99	74.00	18.01	Vertical
4	16882.6667	41.75	38.71	-32.15	48.30	88.20	39.90	Vertical
5	17858.3333	40.62	41.29	-30.74	51.17	74.00	22.83	Vertical
6	17997.3333	31.96	41.69	-30.73	42.92	54.00	11.08	Vertical

11be(EHT20)_TX_CH_185_Horizontal

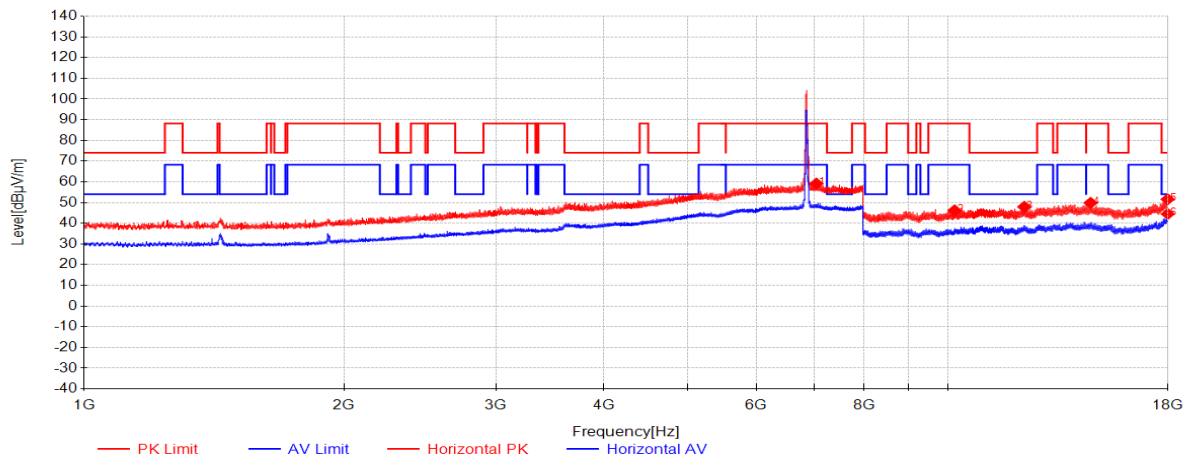


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7047.125	40.12	36.30	-17.29	59.13	88.20	29.07	Horizontal
2	10188.3333	44.50	38.33	-36.64	46.19	88.20	42.01	Horizontal
3	12272.6667	43.37	39.03	-34.48	47.92	74.00	26.08	Horizontal
4	14644.3333	43.76	40.01	-33.94	49.84	88.20	38.36	Horizontal
5	17987.3333	40.69	41.66	-30.76	51.59	74.00	22.41	Horizontal
6	17993	33.56	41.68	-30.74	44.50	54.00	9.50	Horizontal

11be(EHT20)_TX_CH_185_Vertical

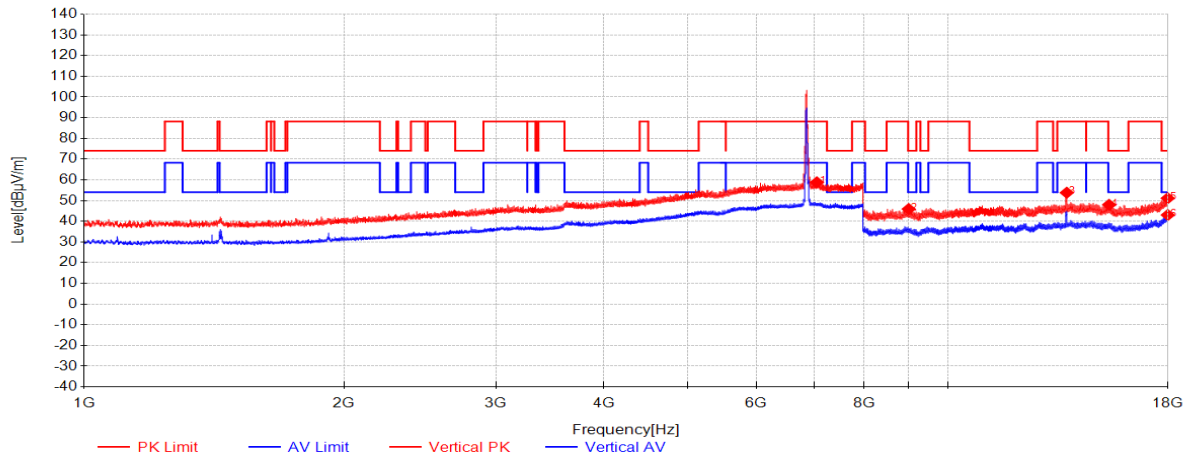


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7055.4375	39.80	36.30	-17.29	58.81	88.20	29.39	Vertical
2	9014.6667	46.52	38.00	-38.63	45.89	74.00	28.11	Vertical
3	13742	48.36	40.27	-34.85	53.79	88.20	34.41	Vertical
4	15384.3333	42.23	39.11	-33.40	47.94	74.00	26.06	Vertical
5	17991.6667	40.18	41.68	-30.75	51.11	74.00	22.89	Vertical
6	17993.6667	32.07	41.68	-30.74	43.01	54.00	10.99	Vertical

11be(EHT20)_TX_CH_189_Horizontal

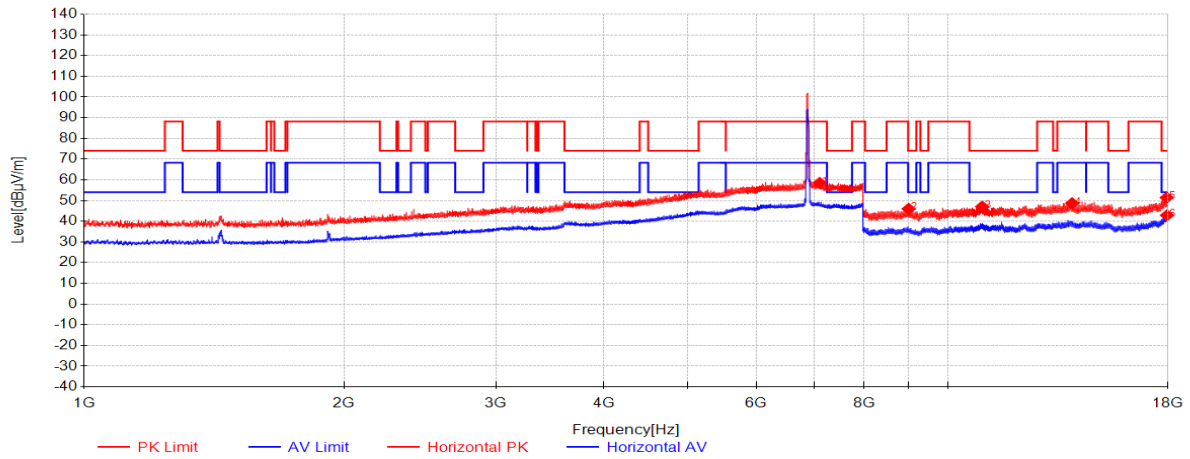


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7110.125	39.59	36.30	-17.37	58.52	88.20	29.68	Horizontal
2	9012.6667	46.61	38.00	-38.62	46.00	74.00	28.00	Horizontal
3	10965	43.54	39.26	-35.77	47.03	74.00	26.97	Horizontal
4	13941.3333	42.97	40.37	-34.60	48.74	88.20	39.46	Horizontal
5	17939	40.80	41.52	-30.92	51.41	74.00	22.59	Horizontal
6	17955.3333	32.19	41.57	-30.86	42.90	54.00	11.10	Horizontal

11be(EHT20)_TX_CH_189_Vertical

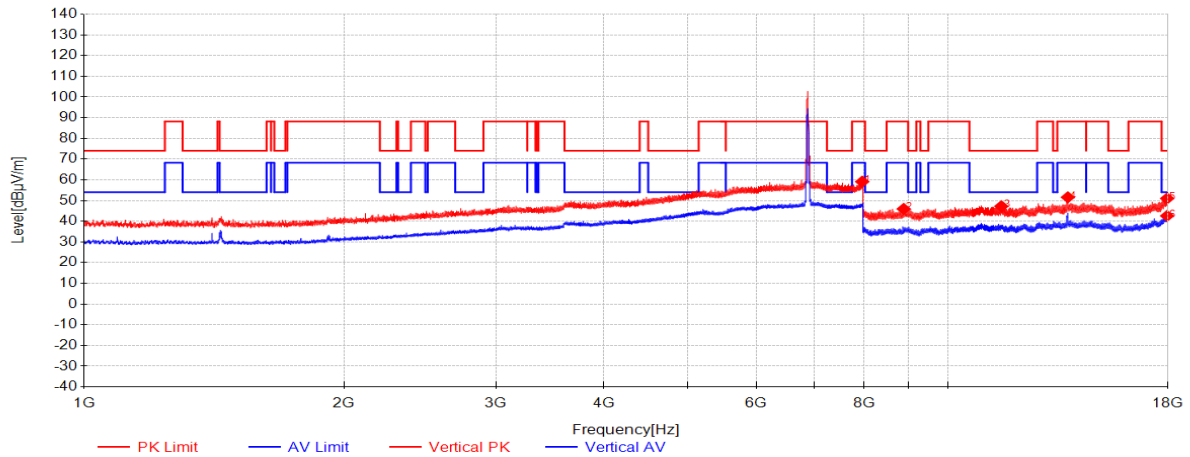


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7963.25	40.70	37.23	-18.81	59.12	88.20	29.08	Vertical
2	8895	47.06	37.93	-39.03	45.96	88.20	42.24	Vertical
3	11542	43.57	38.97	-35.30	47.24	74.00	26.76	Vertical
4	13782	46.15	40.29	-34.87	51.57	88.20	36.63	Vertical
5	17961.3333	40.28	41.59	-30.84	51.02	74.00	22.98	Vertical
6	17959.3333	31.85	41.58	-30.85	42.58	54.00	11.42	Vertical

11be(EHT20)_TX_CH_209_Horizontal

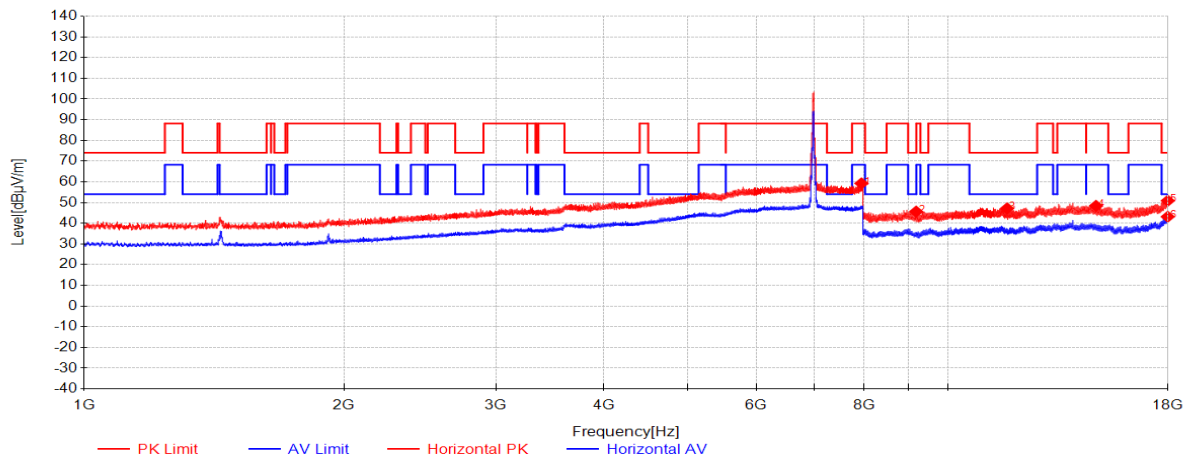


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7947.9375	40.89	37.20	-18.82	59.26	88.20	28.94	Horizontal
2	9195.3333	46.52	38.02	-38.90	45.63	74.00	28.37	Horizontal
3	11722.3333	43.81	38.87	-35.52	47.16	74.00	26.84	Horizontal
4	14858.6667	42.17	39.88	-33.66	48.39	88.20	39.81	Horizontal
5	17995	39.93	41.69	-30.74	50.88	74.00	23.12	Horizontal
6	17989.3333	32.23	41.67	-30.75	43.14	54.00	10.86	Horizontal

11be(EHT20)_TX_CH_209_Vertical

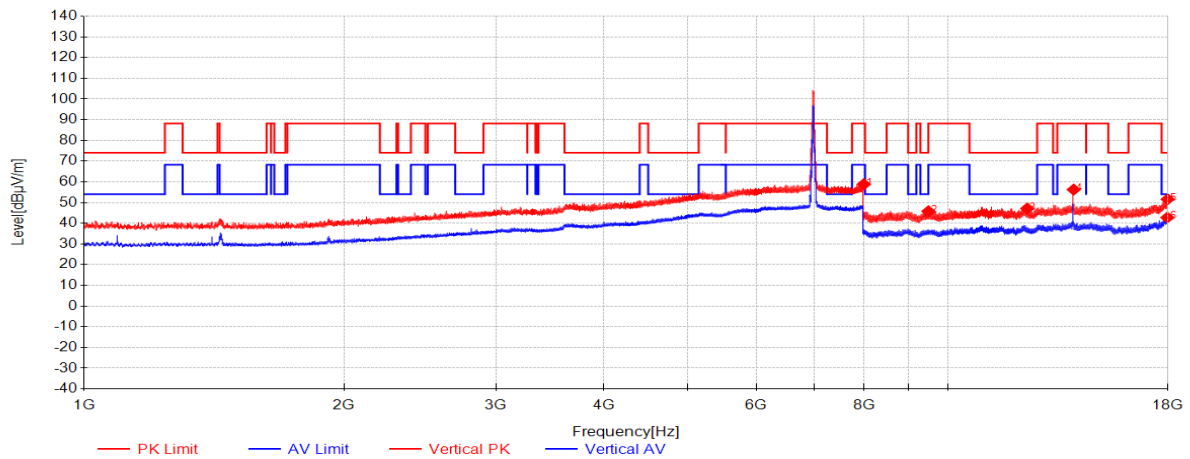


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7997.375	40.33	37.29	-18.78	58.84	88.20	29.36	Vertical
2	9504	45.92	38.05	-38.18	45.79	88.20	42.41	Vertical
3	12366.6667	42.75	39.14	-34.77	47.12	74.00	26.88	Vertical
4	13998	50.86	40.40	-35.00	56.26	88.20	31.94	Vertical
5	17986.3333	40.70	41.66	-30.76	51.60	74.00	22.40	Vertical
6	17975	31.93	41.63	-30.80	42.76	54.00	11.24	Vertical

11be(EHT20)_TX_CH_233_Horizontal

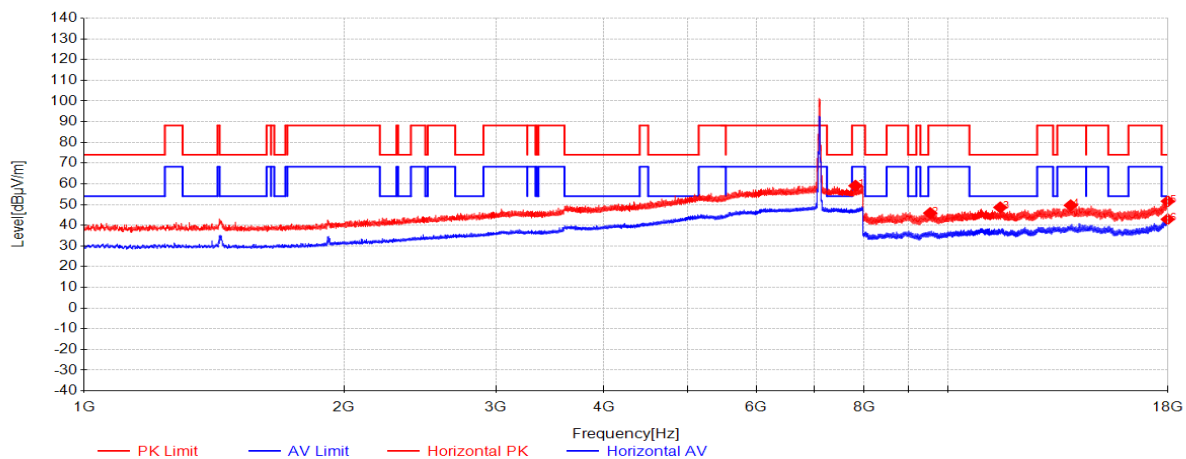


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7822.8125	40.87	36.95	-18.74	59.07	88.20	29.13	Horizontal
2	9547.6667	45.84	38.05	-38.02	45.88	88.20	42.32	Horizontal
3	11509.6667	45.22	38.99	-35.62	48.60	74.00	25.40	Horizontal
4	13888.3333	43.65	40.34	-34.38	49.62	88.20	38.58	Horizontal
5	17994.3333	40.65	41.68	-30.74	51.60	74.00	22.40	Horizontal
6	17988	31.97	41.67	-30.76	42.88	54.00	11.12	Horizontal

11be(EHT20)_TX_CH_233_Vertical

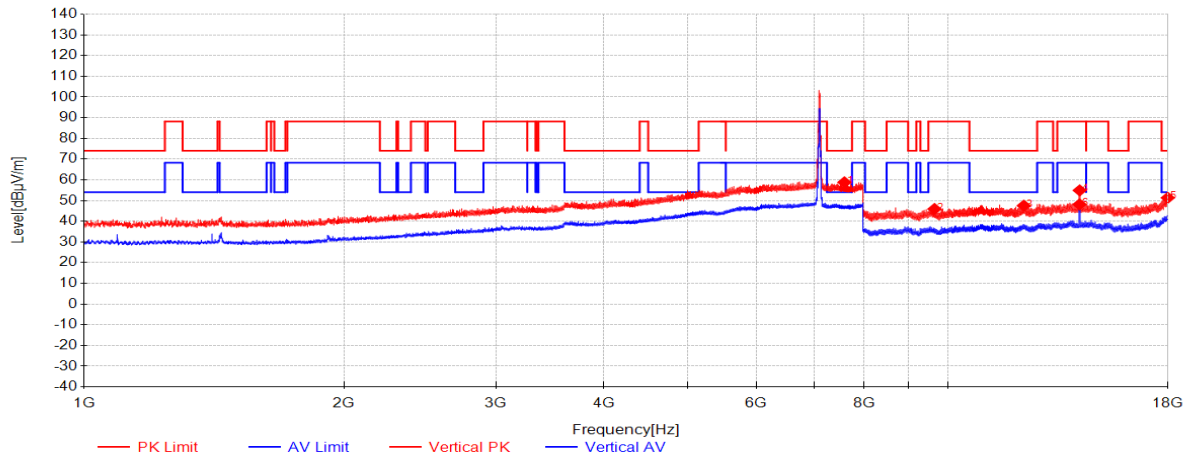


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7594	40.72	36.49	-18.42	58.79	74.00	15.21	Vertical
2	9657	45.51	38.07	-37.65	45.92	88.20	42.28	Vertical
3	12255.3333	43.16	39.01	-34.63	47.53	74.00	26.47	Vertical
4	14224	49.58	40.27	-34.95	54.90	88.20	33.30	Vertical
5	17991.6667	40.39	41.68	-30.75	51.32	74.00	22.68	Vertical
6	14217.6667	42.86	40.27	-34.99	48.14	68.20	20.06	Vertical

11be(EHT40)_TX_CH_003_Horizontal

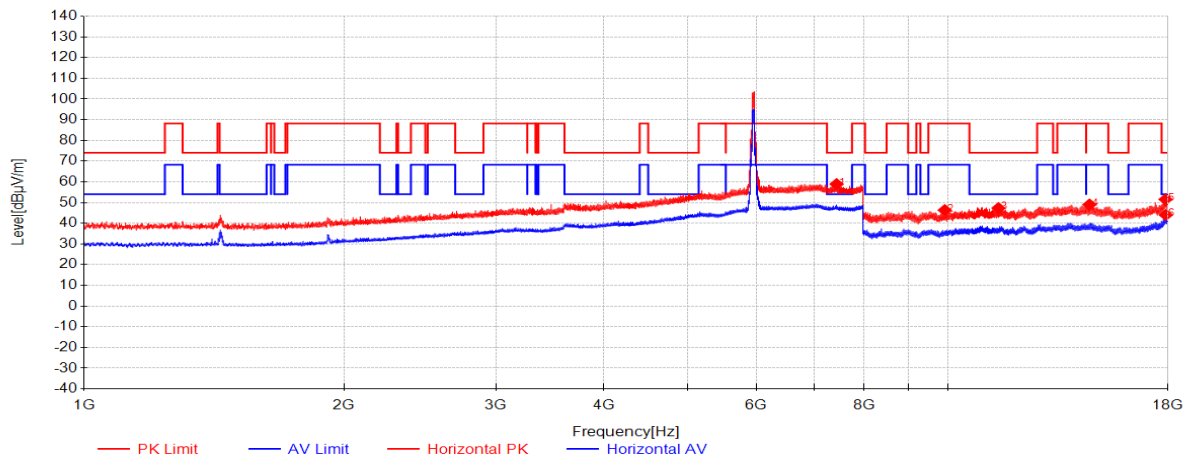


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7437.8125	40.53	36.30	-17.92	58.91	74.00	15.09	Horizontal
2	9924.3333	45.64	38.09	-37.41	46.33	88.20	41.87	Horizontal
3	11454	44.08	39.03	-35.79	47.31	74.00	26.69	Horizontal
4	14600.3333	43.22	40.04	-34.25	49.01	88.20	39.19	Horizontal
5	17885	41.11	41.37	-30.93	51.54	74.00	22.46	Horizontal
6	17899.3333	33.62	41.41	-31.04	43.99	54.00	10.01	Horizontal

11be(EHT40)_TX_CH_003_Vertical

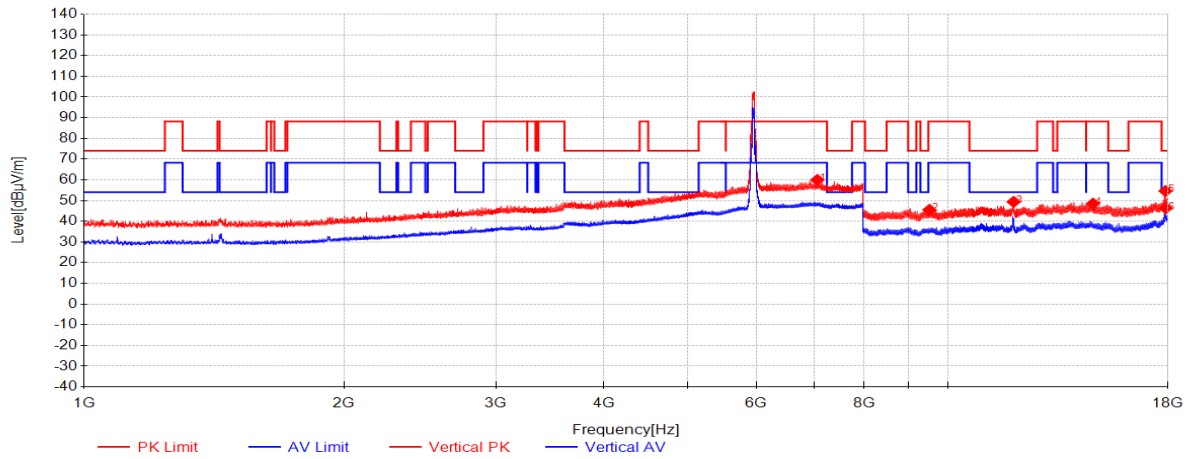


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7065.0625	40.98	36.30	-17.30	59.98	88.20	28.22	Vertical
2	9527.6667	45.57	38.05	-38.09	45.53	88.20	42.67	Vertical
3	11926.3333	45.55	38.74	-34.92	49.37	74.00	24.63	Vertical
4	14739.6667	42.34	39.96	-33.77	48.53	88.20	39.67	Vertical
5	17882.3333	44.17	41.36	-30.91	54.62	74.00	19.38	Vertical
6	17893.3333	35.92	41.39	-30.99	46.32	54.00	7.68	Vertical

11be(EHT40)_TX_CH_043_Horizontal

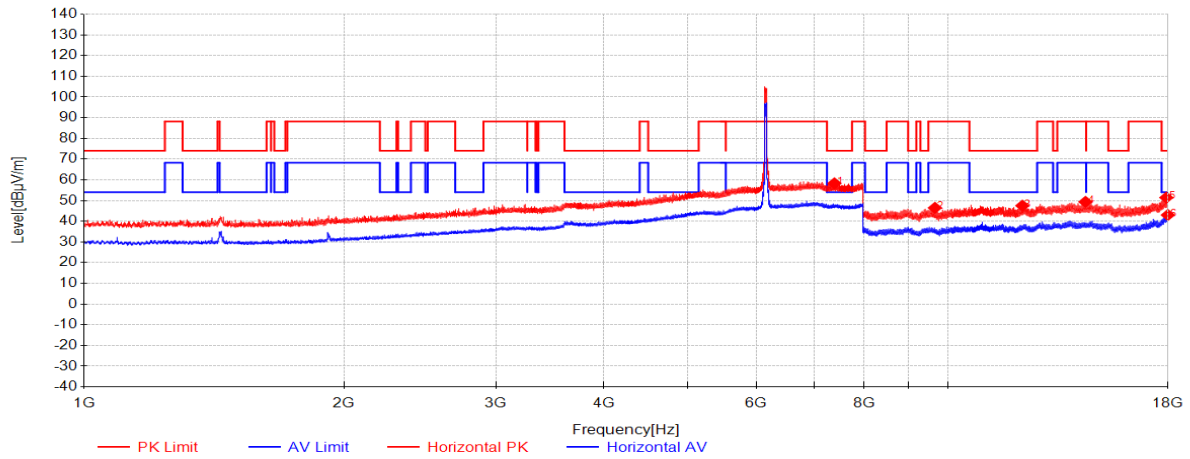


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7394.5	39.75	36.30	-17.75	58.30	74.00	15.70	Horizontal
2	9668.6667	46.02	38.07	-37.62	46.47	88.20	41.73	Horizontal
3	12208.3333	43.61	38.95	-35.05	47.51	74.00	26.49	Horizontal
4	14446	43.39	40.13	-34.16	49.36	88.20	38.84	Horizontal
5	17923.3333	40.93	41.48	-30.97	51.44	74.00	22.56	Horizontal
6	17997	32.05	41.69	-30.73	43.01	54.00	10.99	Horizontal

11be(EHT40)_TX_CH_043_Vertical

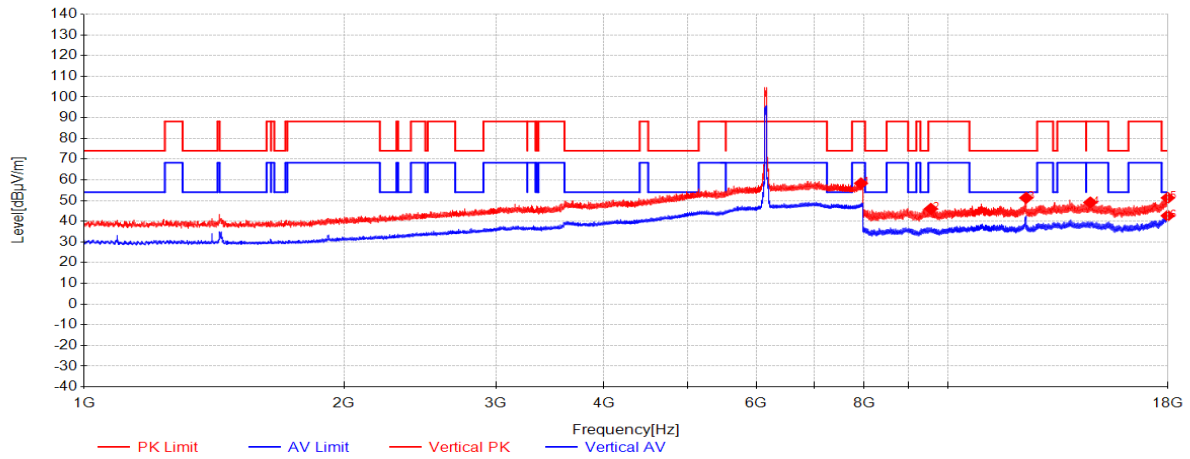


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7938.3125	39.96	37.18	-18.83	58.31	88.20	29.89	Vertical
2	9566.3333	45.89	38.06	-37.95	46.00	88.20	42.20	Vertical
3	12334.3333	46.70	39.10	-34.51	51.29	74.00	22.71	Vertical
4	14634	43.07	40.02	-34.01	49.08	88.20	39.12	Vertical
5	17994.3333	40.34	41.68	-30.74	51.29	74.00	22.71	Vertical
6	17987.3333	31.77	41.66	-30.76	42.67	54.00	11.33	Vertical

11be(EHT40)_TX_CH_091_Horizontal

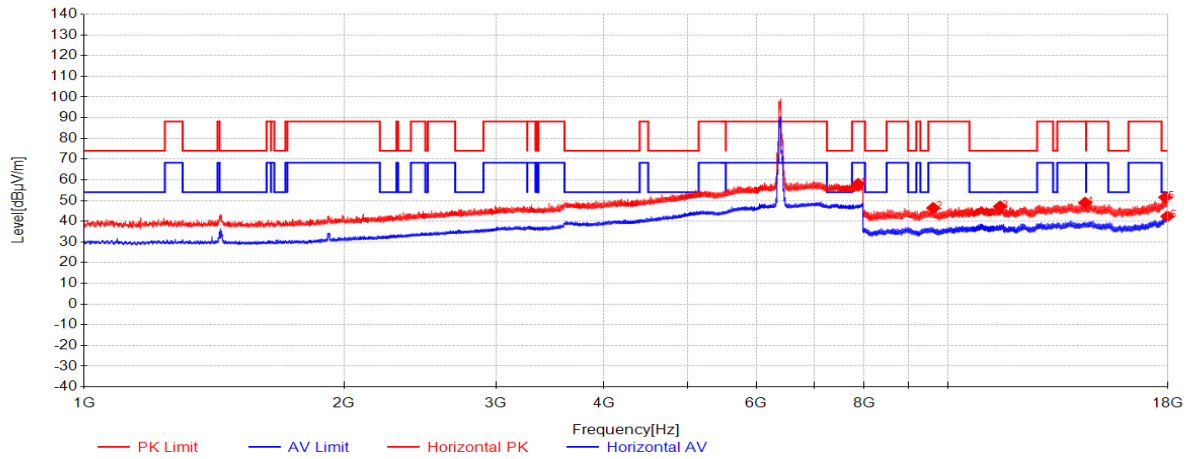


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7877.9375	39.79	37.06	-18.83	58.02	88.20	30.18	Horizontal
2	9626	46.07	38.06	-37.75	46.38	88.20	41.82	Horizontal
3	11501	43.81	39.00	-35.70	47.11	74.00	26.89	Horizontal
4	14431.3333	42.84	40.14	-34.03	48.95	88.20	39.25	Horizontal
5	17873.6667	41.06	41.33	-30.85	51.54	74.00	22.46	Horizontal
6	17976	31.56	41.63	-30.80	42.39	54.00	11.61	Horizontal

11be(EHT40)_TX_CH_091_Vertical

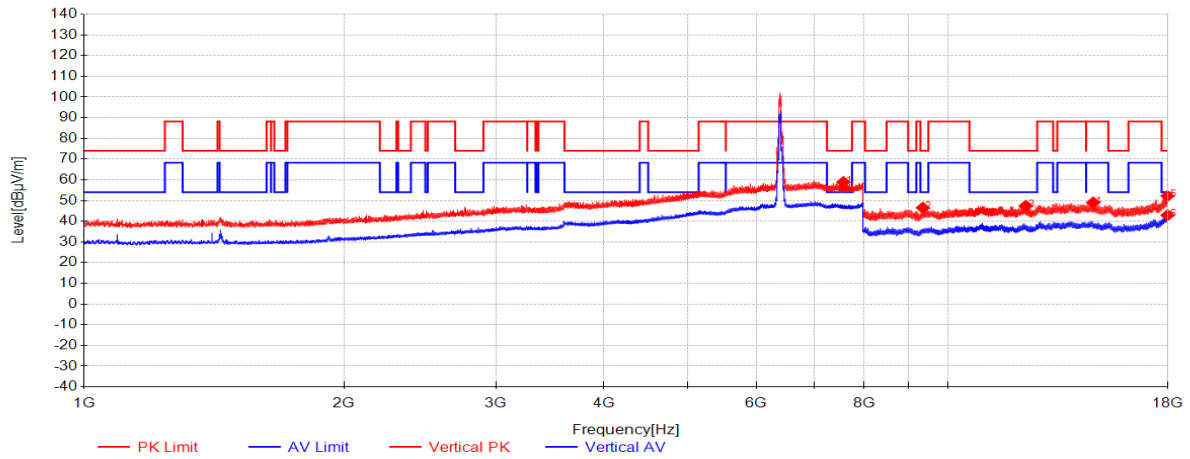


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7574.3125	40.81	36.45	-18.37	58.89	74.00	15.11	Vertical
2	9361.3333	46.94	38.04	-38.46	46.51	74.00	27.49	Vertical
3	12317.6667	42.71	39.08	-34.37	47.42	74.00	26.58	Vertical
4	14744.3333	42.86	39.95	-33.80	49.02	88.20	39.18	Vertical
5	17981	41.35	41.64	-30.78	52.21	74.00	21.79	Vertical
6	17983	32.05	41.65	-30.77	42.93	54.00	11.07	Vertical

11be(EHT40)_TX_CH_099_Horizontal

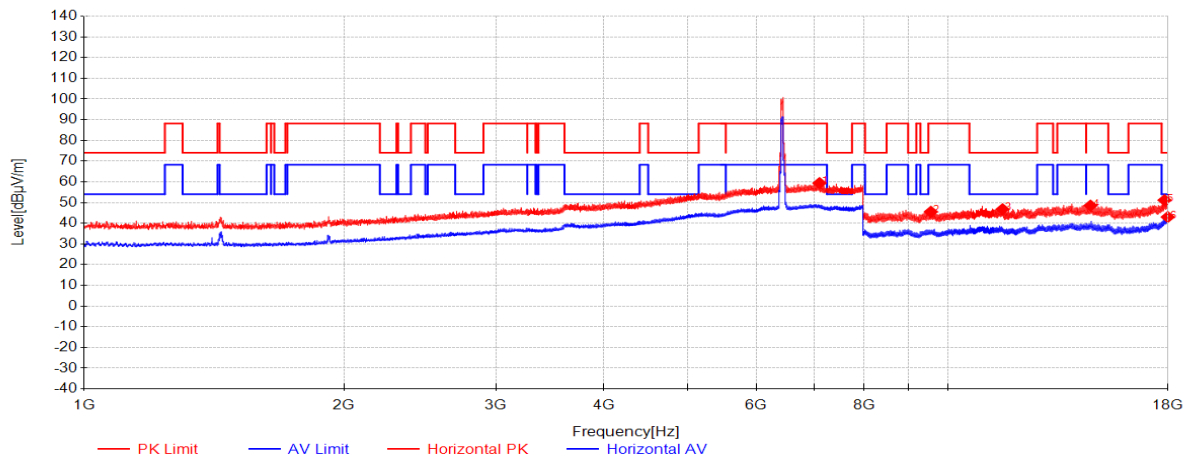


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7106.625	40.45	36.30	-17.35	59.40	88.20	28.80	Horizontal
2	9564.6667	45.44	38.06	-37.96	45.54	88.20	42.66	Horizontal
3	11579.3333	42.76	38.95	-34.94	46.77	74.00	27.23	Horizontal
4	14640.6667	42.49	40.02	-33.96	48.54	88.20	39.66	Horizontal
5	17839.3333	40.52	41.23	-30.60	51.15	74.00	22.85	Horizontal
6	17991.6667	32.08	41.68	-30.75	43.01	54.00	10.99	Horizontal

11be(EHT40)_TX_CH_099_Vertical

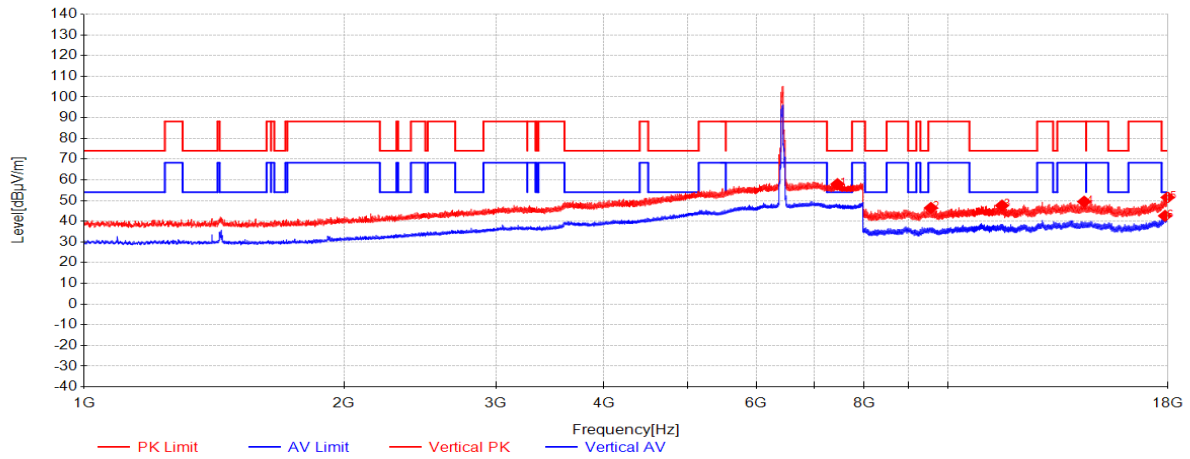


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7455.3125	39.64	36.30	-18.00	57.94	74.00	16.06	Vertical
2	9566.3333	46.31	38.06	-37.95	46.42	88.20	41.78	Vertical
3	11564.6667	43.72	38.96	-35.08	47.60	74.00	26.40	Vertical
4	14396	43.08	40.16	-33.77	49.47	88.20	38.73	Vertical
5	17985.3333	40.65	41.66	-30.77	51.54	74.00	22.46	Vertical
6	17862	32.10	41.30	-30.77	42.63	54.00	11.37	Vertical

11be(EHT40)_TX_CH_107_Horizontal

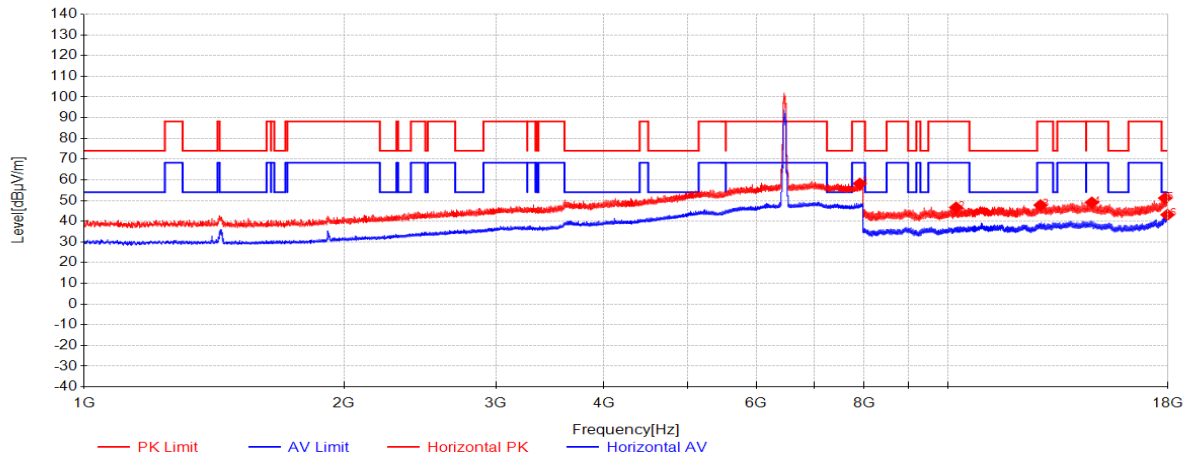


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7912.5	39.87	37.13	-18.85	58.15	88.20	30.05	Horizontal
2	10230.3333	44.94	38.38	-36.67	46.64	88.20	41.56	Horizontal
3	12813.3333	42.70	39.68	-34.62	47.75	88.20	40.45	Horizontal
4	14694	42.66	39.98	-33.58	49.06	88.20	39.14	Horizontal
5	17864.3333	40.65	41.31	-30.78	51.17	74.00	22.83	Horizontal
6	17977.3333	32.29	41.63	-30.79	43.13	54.00	10.87	Horizontal

11be(EHT40)_TX_CH_107_Vertical

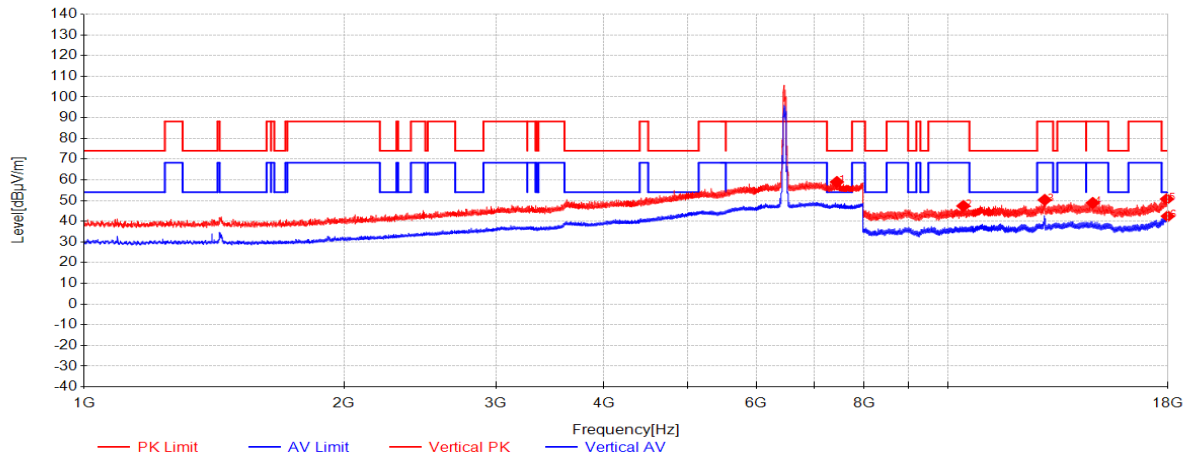


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7443.0625	40.63	36.30	-17.95	58.98	74.00	15.02	Vertical
2	10429.6667	45.11	38.62	-36.34	47.38	88.20	40.82	Vertical
3	12959.6667	45.31	39.85	-34.85	50.31	88.20	37.89	Vertical
4	14729.3333	42.61	39.96	-33.71	48.86	88.20	39.34	Vertical
5	17951	40.04	41.56	-30.88	50.72	74.00	23.28	Vertical
6	17991.6667	31.52	41.68	-30.75	42.45	54.00	11.55	Vertical

11be(EHT40)_TX_CH_115_Horizontal

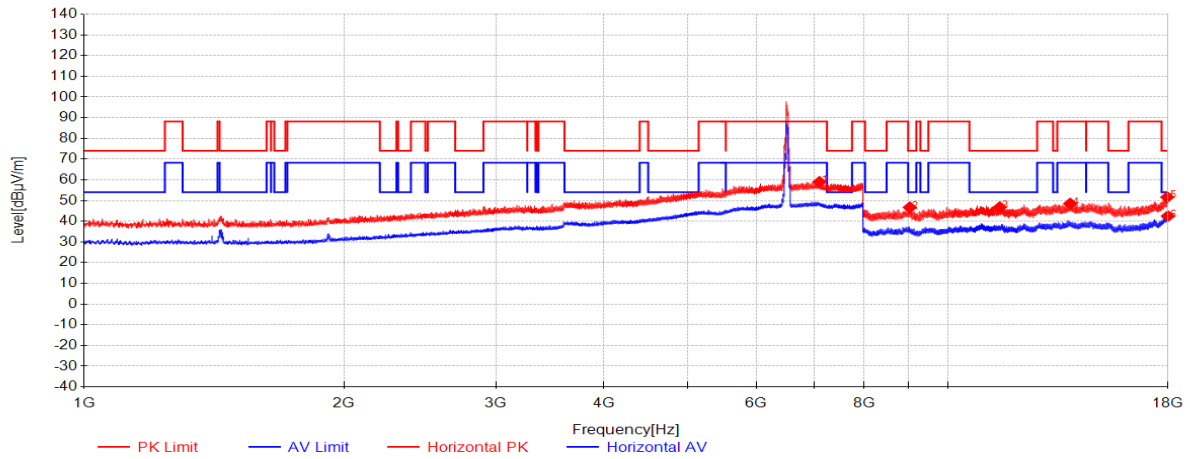


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7105.3125	40.03	36.30	-17.34	58.99	88.20	29.21	Horizontal
2	9041.3333	47.51	38.00	-38.81	46.70	74.00	27.30	Horizontal
3	11493	43.49	39.00	-35.72	46.77	74.00	27.23	Horizontal
4	13868.6667	42.65	40.33	-34.49	48.50	88.20	39.70	Horizontal
5	17968.3333	40.87	41.61	-30.82	51.66	74.00	22.34	Horizontal
6	17998.3333	31.52	41.70	-30.73	42.49	54.00	11.51	Horizontal

11be(EHT40)_TX_CH_115_Vertical

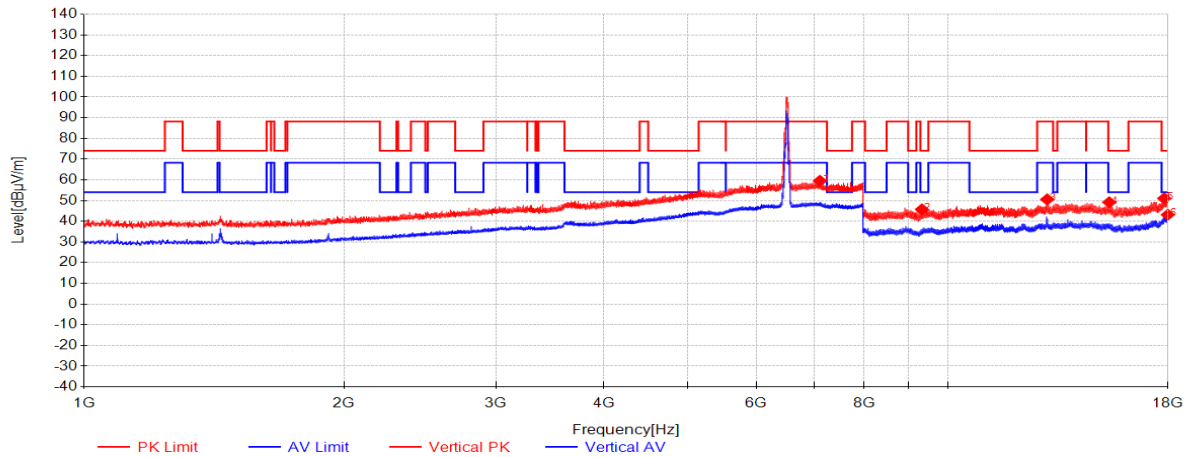


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7113.1875	40.62	36.30	-17.39	59.53	88.20	28.67	Vertical
2	9339.3333	46.21	38.03	-38.54	45.71	74.00	28.29	Vertical
3	13044.6667	45.43	39.92	-34.81	50.54	88.20	37.66	Vertical
4	15390.6667	43.46	39.10	-33.40	49.15	74.00	24.85	Vertical
5	17822.6667	40.34	41.19	-30.48	51.04	74.00	22.96	Vertical
6	17993.6667	32.20	41.68	-30.74	43.14	54.00	10.86	Vertical

11be(EHT40)_TX_CH_123_Horizontal

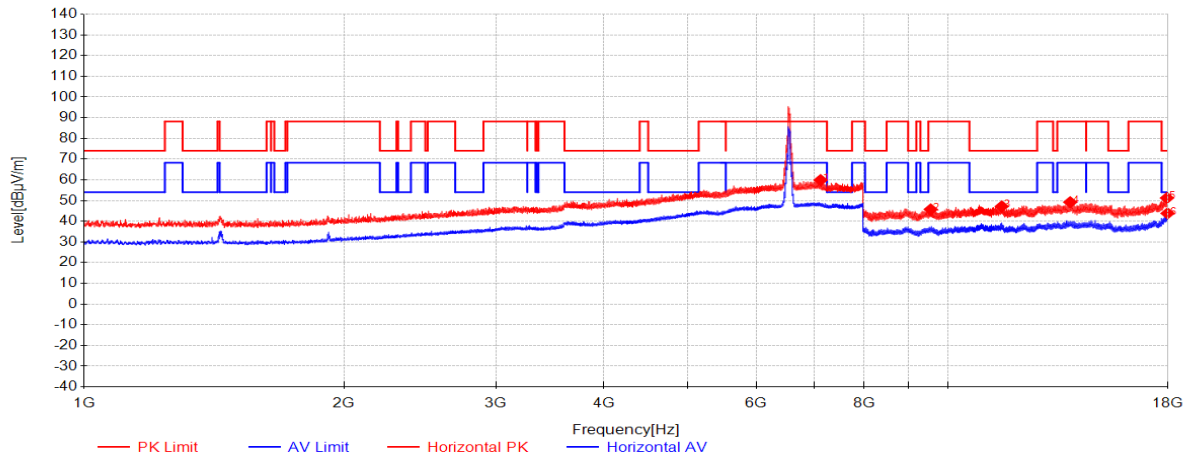


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7126.75	41.04	36.30	-17.46	59.88	88.20	28.32	Horizontal
2	9561.6667	45.63	38.06	-37.97	45.72	88.20	42.48	Horizontal
3	11555.6667	43.38	38.97	-35.17	47.18	74.00	26.82	Horizontal
4	13869	43.36	40.33	-34.49	49.21	88.20	38.99	Horizontal
5	17952	40.55	41.56	-30.87	51.24	74.00	22.76	Horizontal
6	17981	32.95	41.64	-30.78	43.81	54.00	10.19	Horizontal

11be(EHT40)_TX_CH_123_Vertical

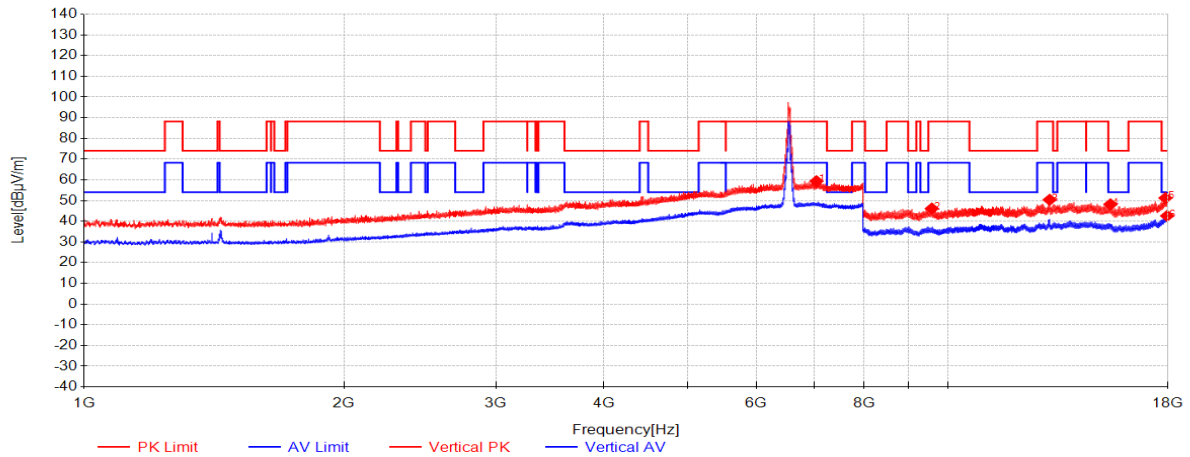


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7048.875	40.36	36.30	-17.29	59.37	88.20	28.83	Vertical
2	9589	45.95	38.06	-37.87	46.14	88.20	42.06	Vertical
3	13128.3333	45.21	39.96	-34.79	50.38	88.20	37.82	Vertical
4	15439.3333	42.27	39.01	-33.09	48.19	74.00	25.81	Vertical
5	17882.3333	40.78	41.36	-30.91	51.23	74.00	22.77	Vertical
6	17961.6667	31.86	41.59	-30.84	42.61	54.00	11.39	Vertical

11be(EHT40)_TX_CH_147_Horizontal

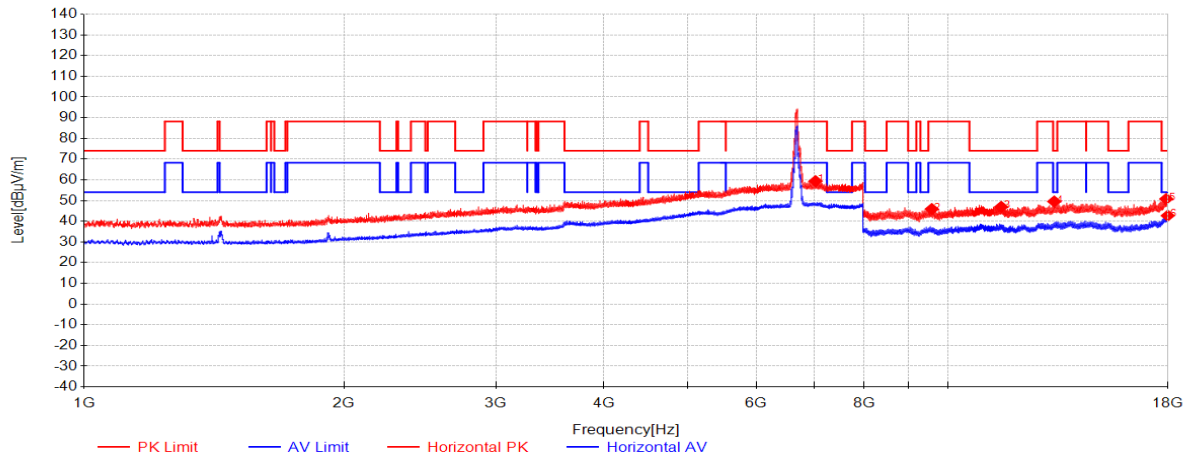


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7031.8125	40.36	36.30	-17.28	59.38	88.20	28.82	Horizontal
2	9588.6667	45.71	38.06	-37.87	45.90	88.20	42.30	Horizontal
3	11539.6667	43.30	38.98	-35.33	46.95	74.00	27.05	Horizontal
4	13289.3333	44.24	40.04	-34.73	49.56	74.00	24.44	Horizontal
5	17918	40.31	41.46	-30.98	50.79	74.00	23.21	Horizontal
6	17991.6667	31.78	41.68	-30.75	42.71	54.00	11.29	Horizontal

11be(EHT40)_TX_CH_147_Vertical

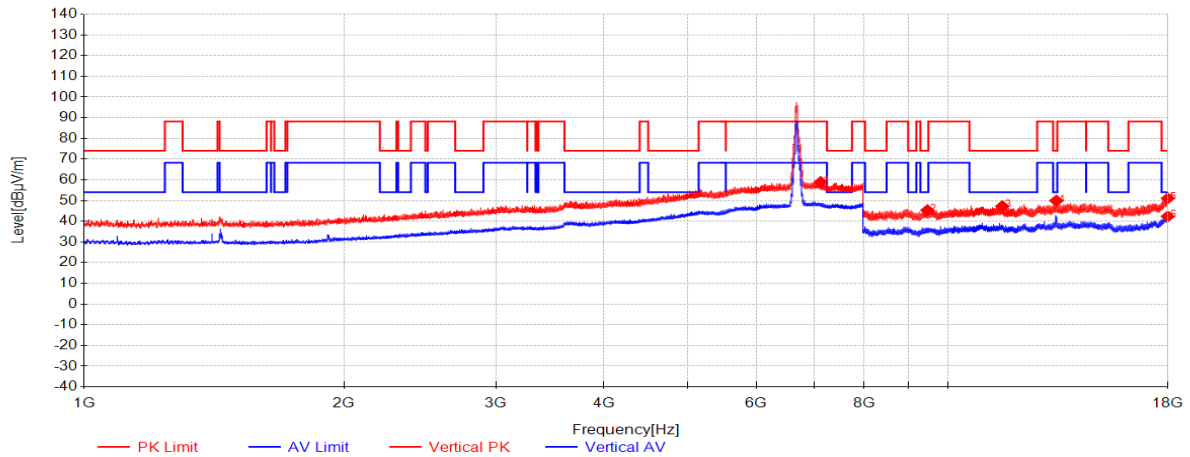


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7128.0625	40.09	36.30	-17.47	58.92	88.20	29.28	Vertical
2	9476.6667	45.48	38.05	-38.22	45.31	74.00	28.69	Vertical
3	11568.6667	43.33	38.96	-35.04	47.24	74.00	26.76	Vertical
4	13364.3333	44.69	40.08	-34.85	49.92	74.00	24.08	Vertical
5	17995.3333	40.13	41.69	-30.73	51.08	74.00	22.92	Vertical
6	17990.3333	31.41	41.67	-30.75	42.33	54.00	11.67	Vertical

11be(EHT40)_TX_CH_179_Horizontal

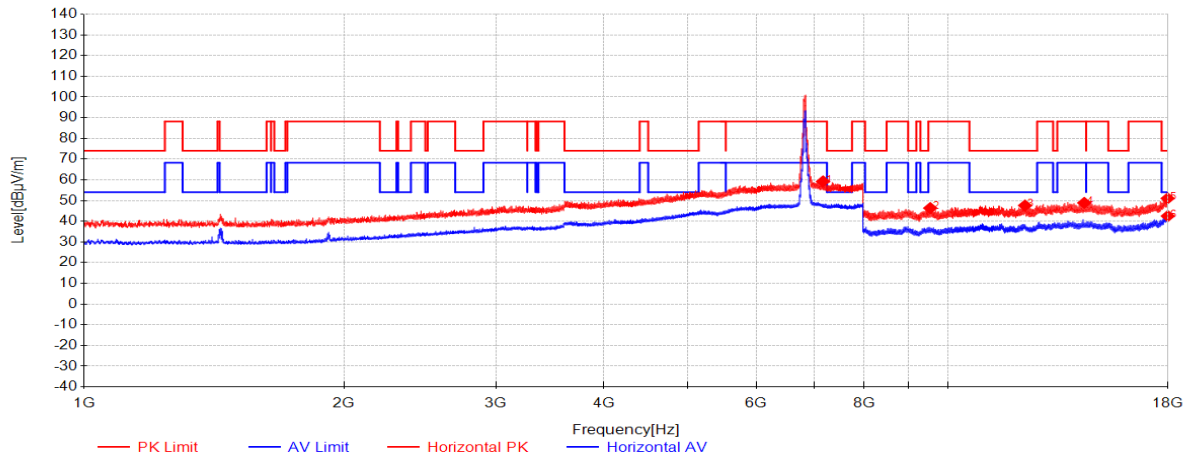


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7173.125	40.69	36.30	-17.73	59.26	88.20	28.94	Horizontal
2	9549	46.31	38.05	-38.01	46.35	88.20	41.85	Horizontal
3	12296	42.82	39.06	-34.27	47.61	74.00	26.39	Horizontal
4	14399	42.46	40.16	-33.75	48.87	88.20	39.33	Horizontal
5	17987	40.15	41.66	-30.76	51.05	74.00	22.95	Horizontal
6	17995.6667	31.57	41.69	-30.73	42.52	54.00	11.48	Horizontal

11be(EHT40)_TX_CH_179_Vertical

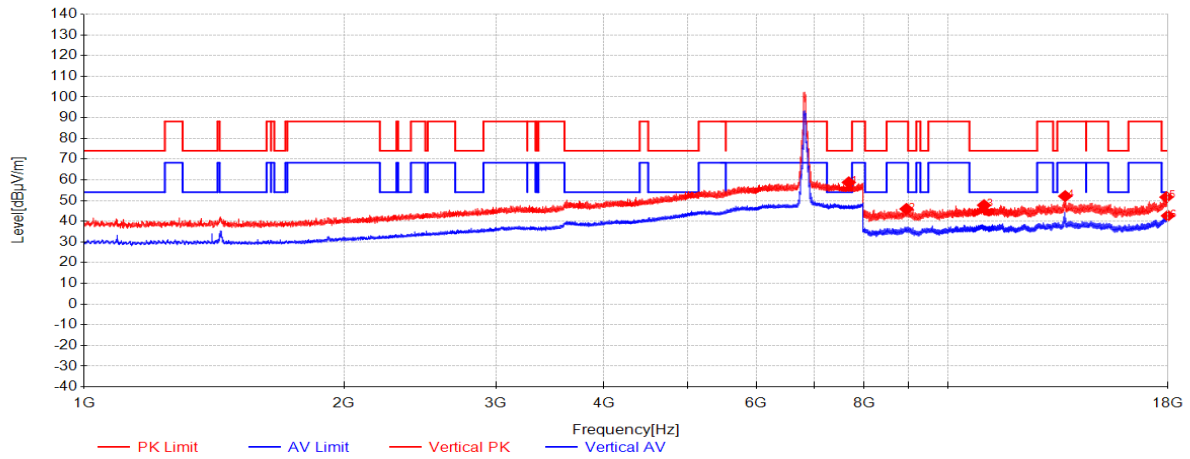


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7684.125	40.69	36.67	-18.60	58.76	74.00	15.24	Vertical
2	8961	46.68	37.97	-38.72	45.93	88.20	42.27	Vertical
3	11021	44.09	39.29	-35.64	47.74	74.00	26.26	Vertical
4	13684.6667	46.61	40.24	-34.74	52.11	88.20	36.09	Vertical
5	17929	41.10	41.49	-30.95	51.65	74.00	22.35	Vertical
6	17997	31.70	41.69	-30.73	42.66	54.00	11.34	Vertical

11be(EHT40)_TX_CH_187_Horizontal

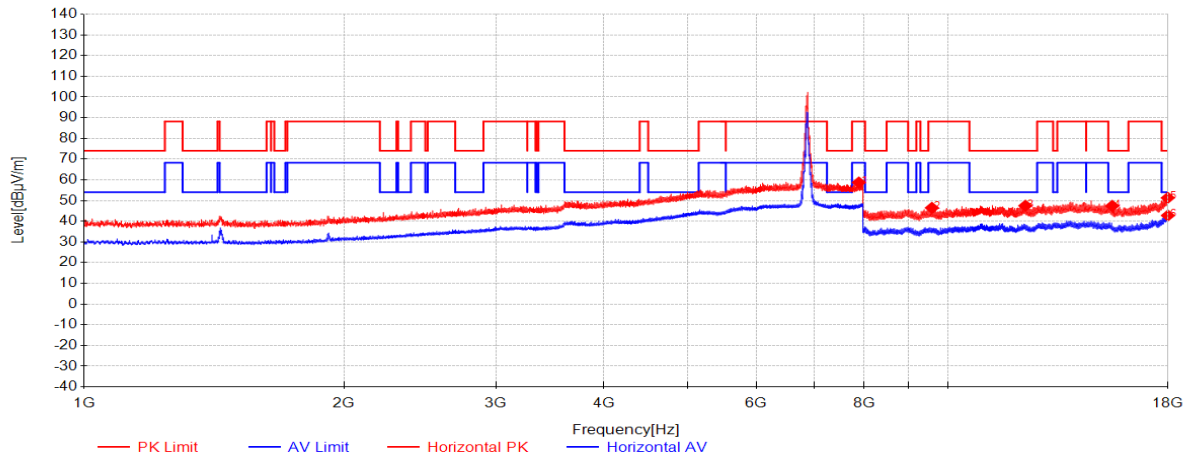


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7893.25	40.47	37.09	-18.85	58.71	88.20	29.49	Horizontal
2	9592	46.26	38.06	-37.86	46.46	88.20	41.74	Horizontal
3	12307	42.73	39.07	-34.29	47.51	74.00	26.49	Horizontal
4	15511.6667	41.22	38.88	-32.68	47.42	74.00	26.58	Horizontal
5	17994	40.37	41.68	-30.74	51.31	74.00	22.69	Horizontal
6	17999.3333	31.80	41.70	-30.72	42.78	54.00	11.22	Horizontal

11be(EHT40)_TX_CH_187_Vertical

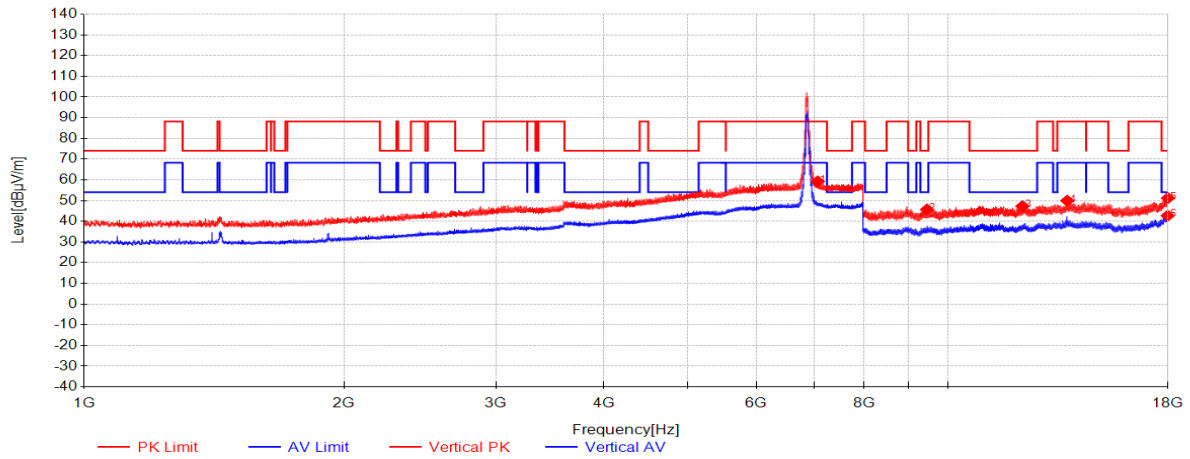


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7072.9375	40.22	36.30	-17.30	59.22	88.20	28.98	Vertical
2	9467	45.88	38.05	-38.24	45.69	74.00	28.31	Vertical
3	12210.3333	43.34	38.95	-35.04	47.26	74.00	26.74	Vertical
4	13759	44.48	40.28	-34.86	49.90	88.20	38.30	Vertical
5	18000	40.21	41.70	-30.72	51.19	74.00	22.81	Vertical
6	17989.3333	31.82	41.67	-30.75	42.73	54.00	11.27	Vertical

11be(EHT40)_TX_CH_203_Horizontal

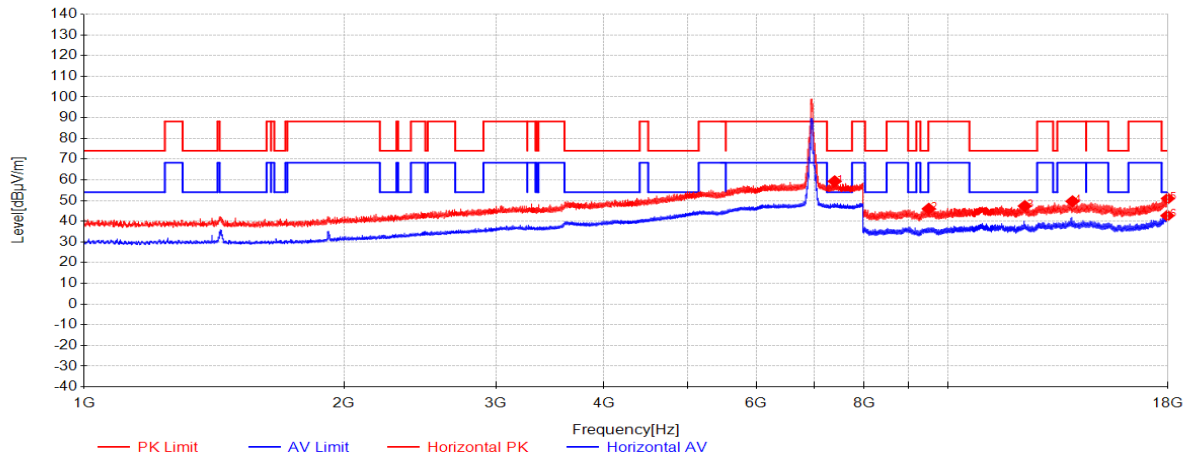


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7399.3125	40.77	36.30	-17.75	59.32	74.00	14.68	Horizontal
2	9511	46.12	38.05	-38.15	46.02	88.20	42.18	Horizontal
3	12288	42.67	39.05	-34.34	47.38	74.00	26.62	Horizontal
4	13953.6667	43.94	40.38	-34.69	49.63	88.20	38.57	Horizontal
5	17995.3333	40.01	41.69	-30.73	50.96	74.00	23.04	Horizontal
6	17973.6667	31.88	41.62	-30.80	42.70	54.00	11.30	Horizontal

11be(EHT40)_TX_CH_203_Vertical

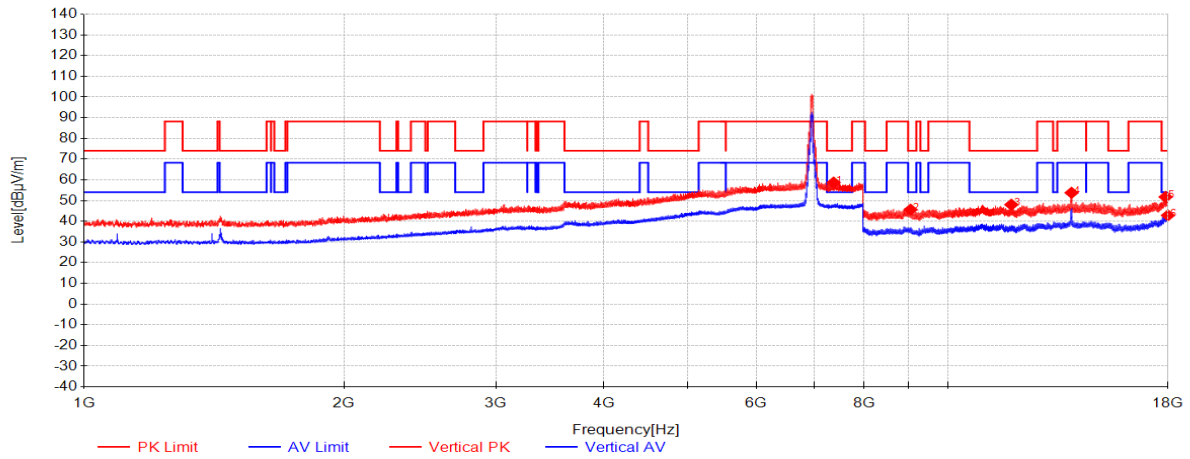


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7377.875	40.13	36.30	-17.75	58.68	74.00	15.32	Vertical
2	9059	46.55	38.01	-38.93	45.62	74.00	28.38	Vertical
3	11855	44.25	38.79	-35.05	47.99	74.00	26.01	Vertical
4	13918	47.83	40.36	-34.44	53.75	88.20	34.45	Vertical
5	17889	41.31	41.38	-30.96	51.73	74.00	22.27	Vertical
6	17999.3333	31.84	41.70	-30.72	42.82	54.00	11.18	Vertical

11be(EHT40)_TX_CH_227_Horizontal

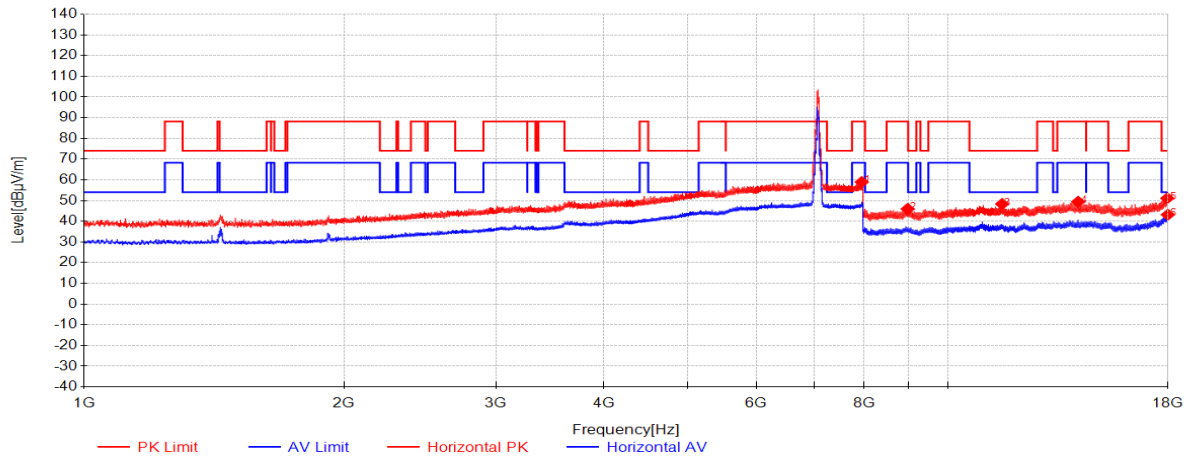


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7954.0625	40.55	37.21	-18.82	58.94	88.20	29.26	Horizontal
2	8990	46.58	37.99	-38.58	45.99	88.20	42.21	Horizontal
3	11566.3333	44.45	38.96	-35.07	48.34	74.00	25.66	Horizontal
4	14167.3333	44.09	40.30	-34.99	49.40	88.20	38.80	Horizontal
5	17968	40.32	41.61	-30.82	51.10	74.00	22.90	Horizontal
6	17992.3333	32.21	41.68	-30.74	43.14	54.00	10.86	Horizontal

11be(EHT40)_TX_CH_227_Vertical

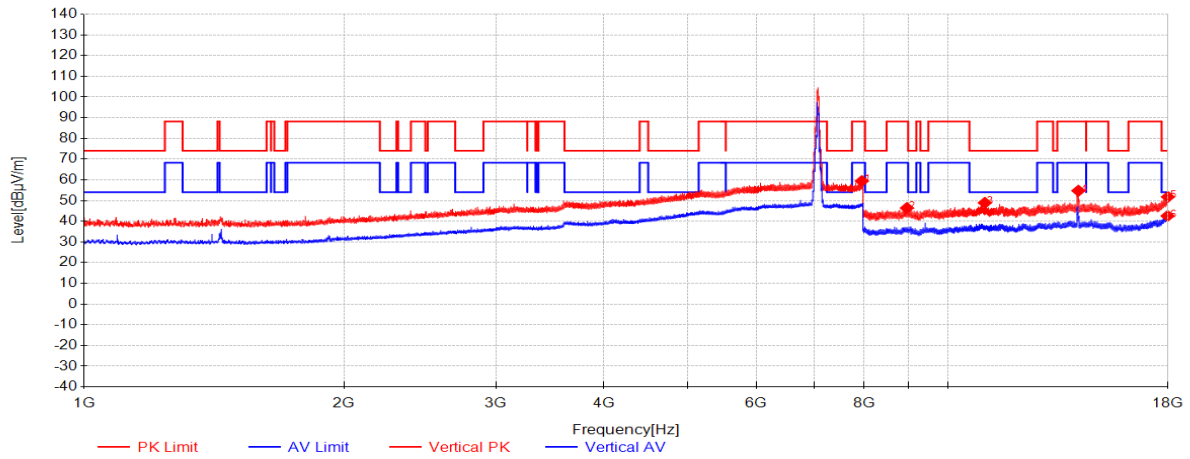


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7956.6875	41.02	37.21	-18.81	59.42	88.20	28.78	Vertical
2	8972.3333	47.07	37.98	-38.67	46.39	88.20	41.81	Vertical
3	11046.3333	45.24	39.27	-35.62	48.89	74.00	25.11	Vertical
4	14176	49.44	40.29	-35.02	54.72	88.20	33.48	Vertical
5	17998.3333	40.80	41.70	-30.73	51.77	74.00	22.23	Vertical
6	17981.3333	31.70	41.65	-30.78	42.57	54.00	11.43	Vertical

11be(EHT80)_TX_CH_007_Horizontal

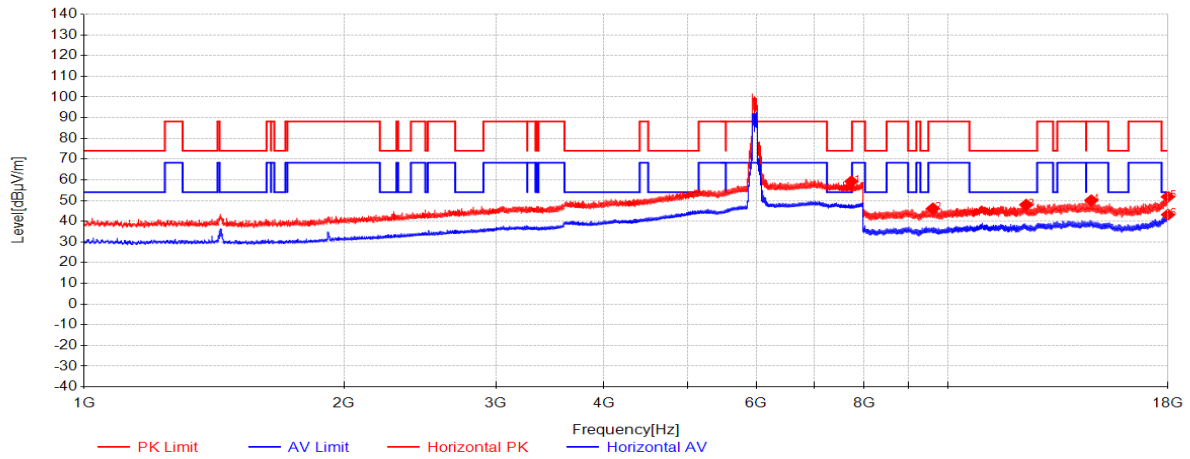


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7738.8125	41.13	36.78	-18.66	59.25	74.00	14.75	Horizontal
2	9616	45.88	38.06	-37.78	46.16	88.20	42.04	Horizontal
3	12333	43.35	39.10	-34.50	47.95	74.00	26.05	Horizontal
4	14669.6667	43.84	40.00	-33.76	50.08	88.20	38.12	Horizontal
5	17993.6667	40.87	41.68	-30.74	51.81	74.00	22.19	Horizontal
6	18000	32.18	41.70	-30.72	43.16	54.00	10.84	Horizontal

11be(EHT80)_TX_CH_007_Vertical

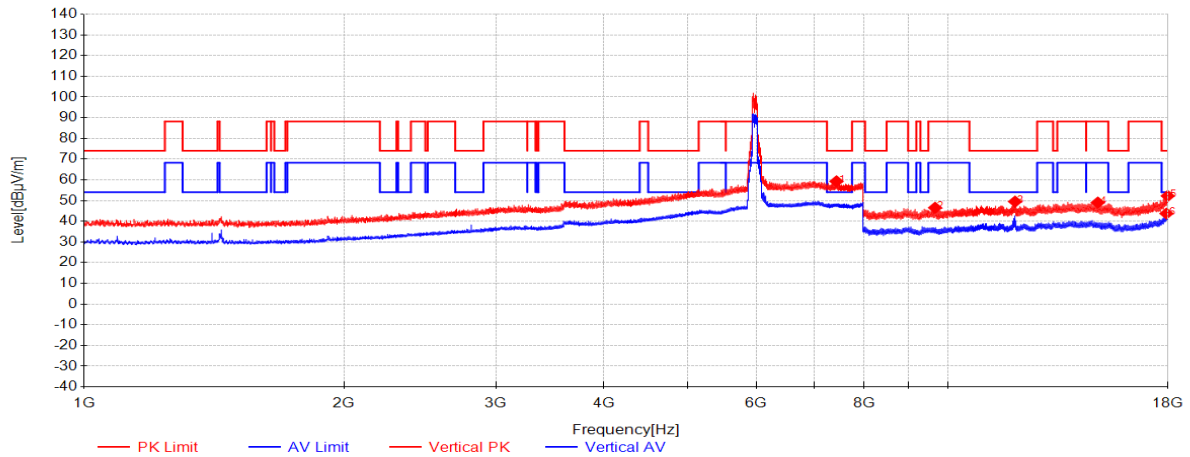


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7435.625	40.90	36.30	-17.91	59.29	74.00	14.71	Vertical
2	9673.6667	46.04	38.07	-37.60	46.51	88.20	41.69	Vertical
3	11972.3333	45.93	38.72	-35.16	49.49	74.00	24.51	Vertical
4	14930	42.69	39.84	-33.53	49.01	88.20	39.19	Vertical
5	17990.3333	41.31	41.67	-30.75	52.23	74.00	21.77	Vertical
6	17929.3333	33.15	41.50	-30.95	43.70	54.00	10.30	Vertical

11be(EHT80)_TX_CH_039_Horizontal

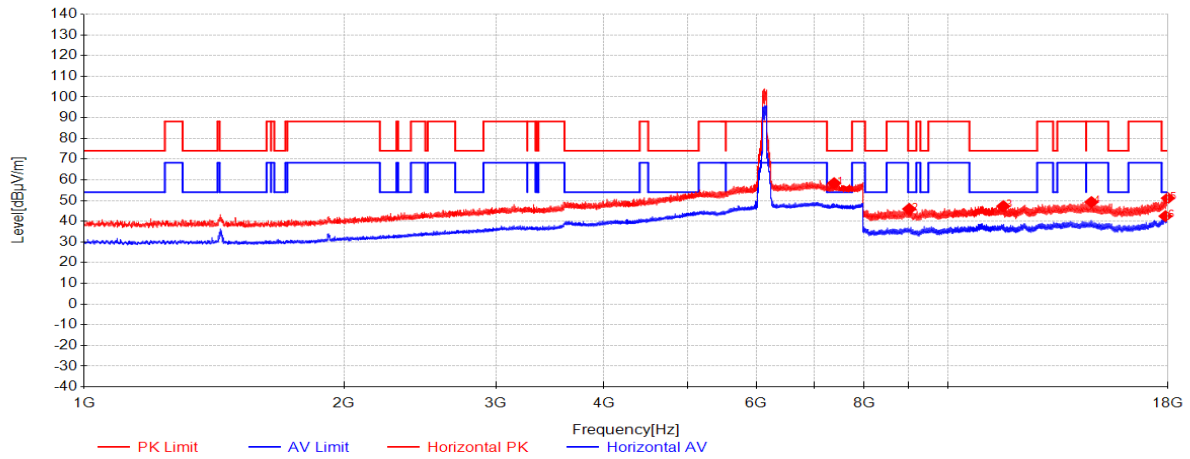


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7388.375	39.82	36.30	-17.75	58.37	74.00	15.63	Horizontal
2	9028	46.65	38.00	-38.72	45.93	74.00	28.07	Horizontal
3	11603.3333	43.10	38.94	-34.77	47.27	74.00	26.73	Horizontal
4	14678.3333	42.95	39.99	-33.69	49.25	88.20	38.95	Horizontal
5	17999	40.19	41.70	-30.72	51.16	74.00	22.84	Horizontal
6	17884	32.03	41.36	-30.92	42.47	54.00	11.53	Horizontal

11be(EHT80)_TX_CH_039_Vertical

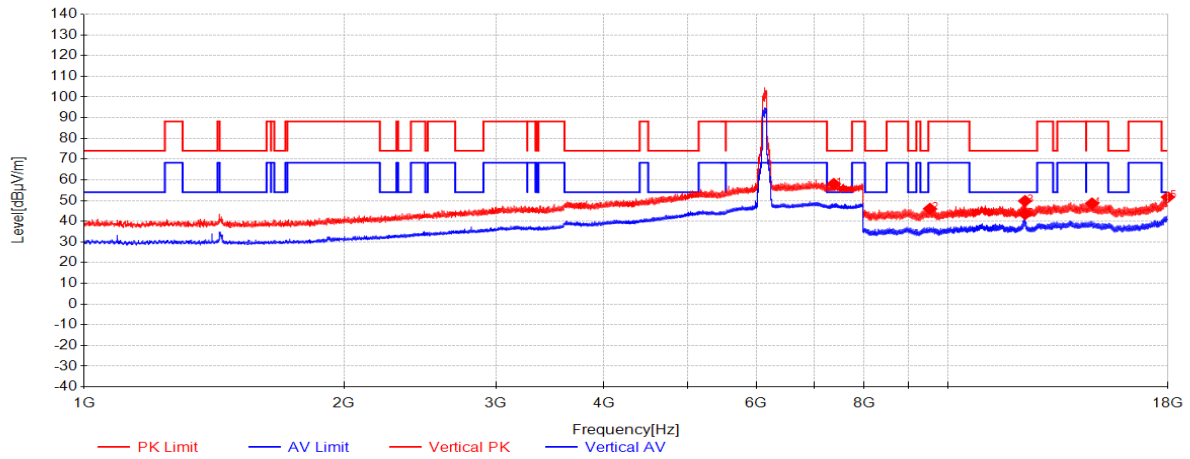


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7383.125	39.50	36.30	-17.75	58.05	74.00	15.95	Vertical
2	9541	46.01	38.05	-38.04	46.02	88.20	42.18	Vertical
3	12294.3333	45.02	39.05	-34.28	49.79	74.00	24.21	Vertical
4	14699.6667	42.16	39.98	-33.54	48.60	88.20	39.60	Vertical
5	17997	40.71	41.69	-30.73	51.67	74.00	22.33	Vertical
6	12294.6667	38.71	39.05	-34.28	43.49	54.00	10.51	Vertical

11be(EHT80)_TX_CH_087_Horizontal

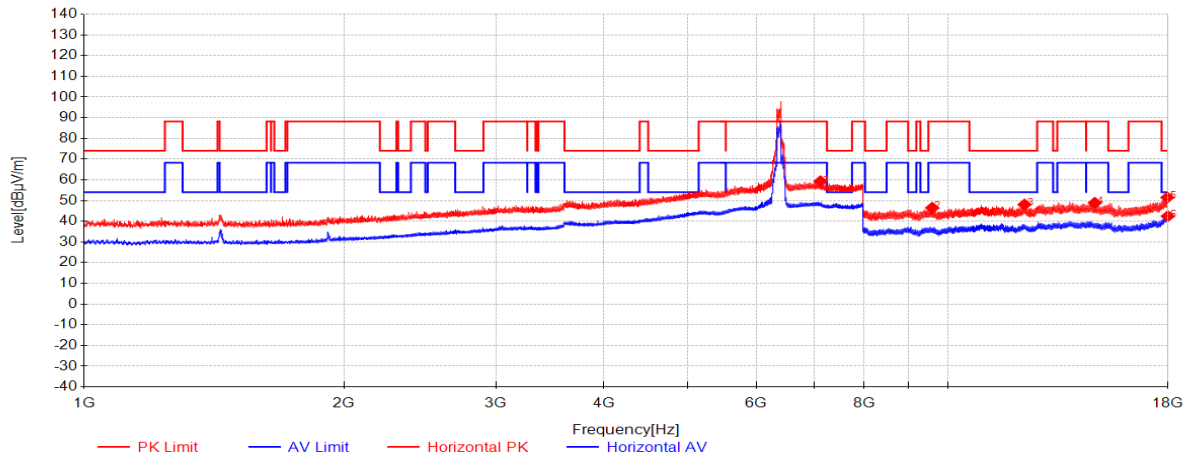


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7125	40.43	36.30	-17.45	59.28	88.20	28.92	Horizontal
2	9599	46.24	38.06	-37.83	46.47	88.20	41.73	Horizontal
3	12277.6667	43.47	39.03	-34.43	48.07	74.00	25.93	Horizontal
4	14809.3333	43.03	39.91	-34.05	48.90	88.20	39.30	Horizontal
5	17971	40.68	41.62	-30.81	51.48	74.00	22.52	Horizontal
6	17993	31.51	41.68	-30.74	42.45	54.00	11.55	Horizontal

11be(EHT80)_TX_CH_087_Vertical

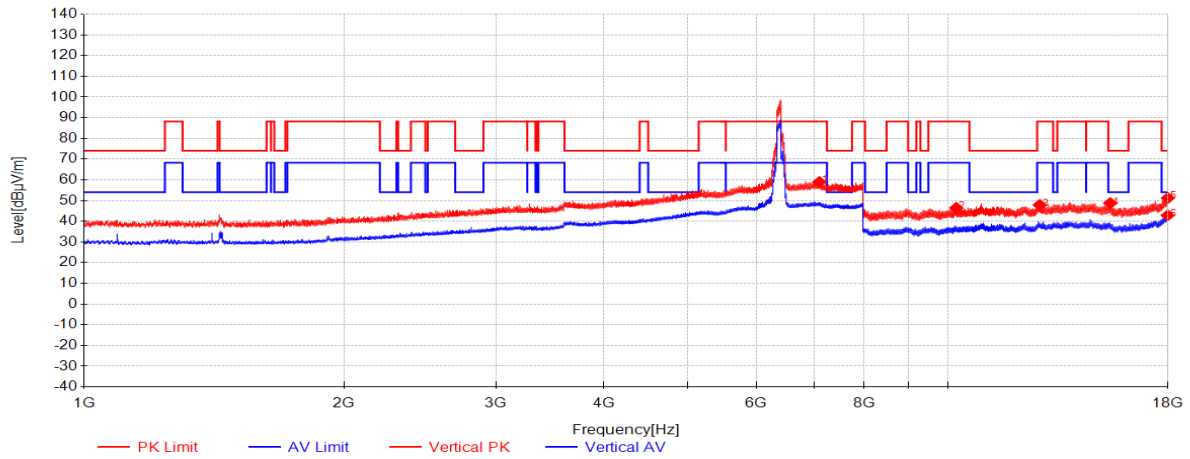


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7103.125	39.97	36.30	-17.33	58.94	88.20	29.26	Vertical
2	10235.3333	44.73	38.38	-36.69	46.43	88.20	41.77	Vertical
3	12786.3333	42.81	39.64	-34.61	47.84	88.20	40.36	Vertical
4	15430.6667	42.89	39.02	-33.16	48.75	74.00	25.25	Vertical
5	17993.6667	40.28	41.68	-30.74	51.22	74.00	22.78	Vertical
6	17988.3333	31.93	41.67	-30.76	42.84	54.00	11.16	Vertical

11be(EHT80)_TX_CH_103_Horizontal

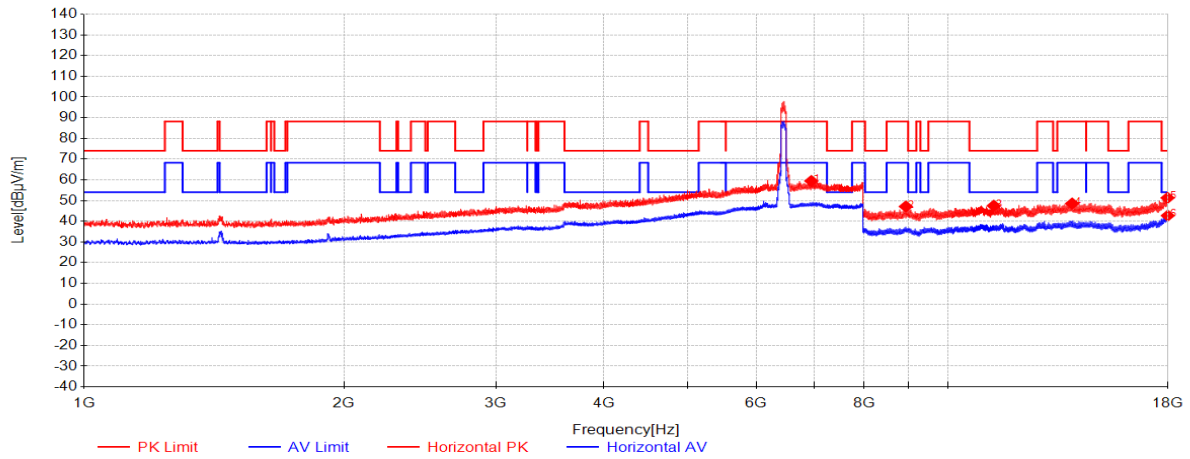


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6953.0625	40.56	36.22	-17.33	59.45	88.20	28.75	Horizontal
2	8947.3333	47.93	37.96	-38.79	47.11	88.20	41.09	Horizontal
3	11311	43.74	39.11	-35.36	47.50	74.00	26.50	Horizontal
4	13941	42.80	40.37	-34.60	48.57	88.20	39.63	Horizontal
5	17984.3333	40.42	41.65	-30.77	51.30	74.00	22.70	Horizontal
6	17993	31.79	41.68	-30.74	42.73	54.00	11.27	Horizontal

11be(EHT80)_TX_CH_103_Vertical

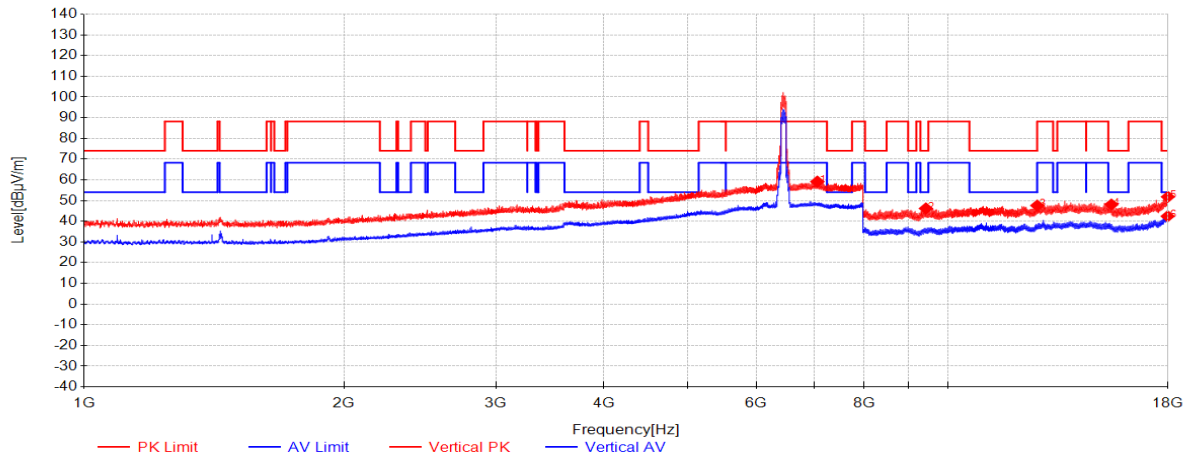


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7065.0625	40.14	36.30	-17.30	59.14	88.20	29.06	Vertical
2	9438.3333	46.41	38.04	-38.28	46.18	74.00	27.82	Vertical
3	12702.3333	42.80	39.54	-34.75	47.60	88.20	40.60	Vertical
4	15479.6667	41.91	38.94	-32.76	48.08	74.00	25.92	Vertical
5	17999.3333	40.82	41.70	-30.72	51.80	74.00	22.20	Vertical
6	17987.6667	31.53	41.66	-30.76	42.43	54.00	11.57	Vertical

11be(EHT80)_TX_CH_119_Horizontal

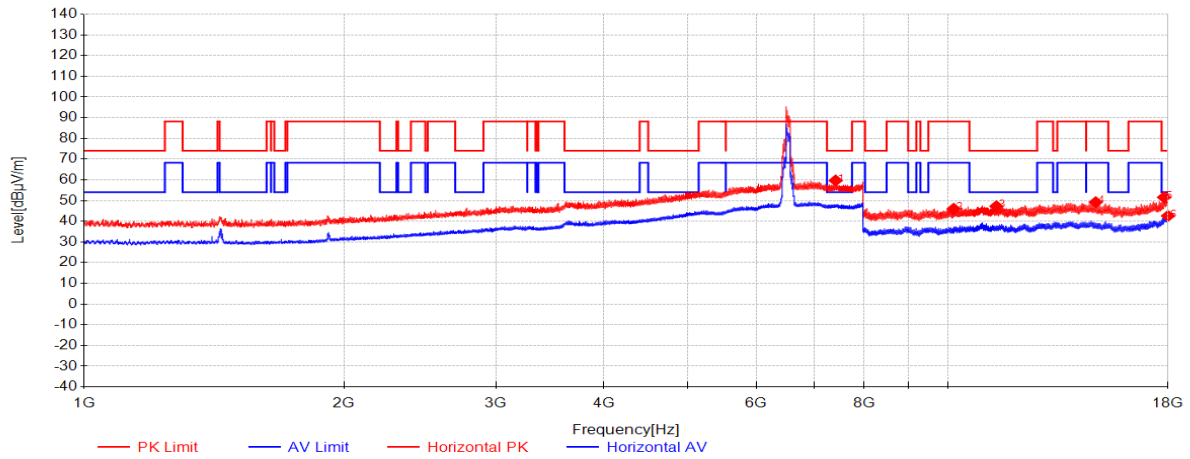


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7418.5625	41.22	36.30	-17.84	59.68	74.00	14.32	Horizontal
2	10165	44.42	38.30	-36.73	45.99	88.20	42.21	Horizontal
3	11390.6667	43.99	39.07	-35.83	47.22	74.00	26.78	Horizontal
4	14845	43.07	39.89	-33.77	49.19	88.20	39.01	Horizontal
5	17813.6667	40.82	41.16	-30.42	51.56	74.00	22.44	Horizontal
6	18000	31.59	41.70	-30.72	42.57	54.00	11.43	Horizontal

11be(EHT80)_TX_CH_119_Vertical

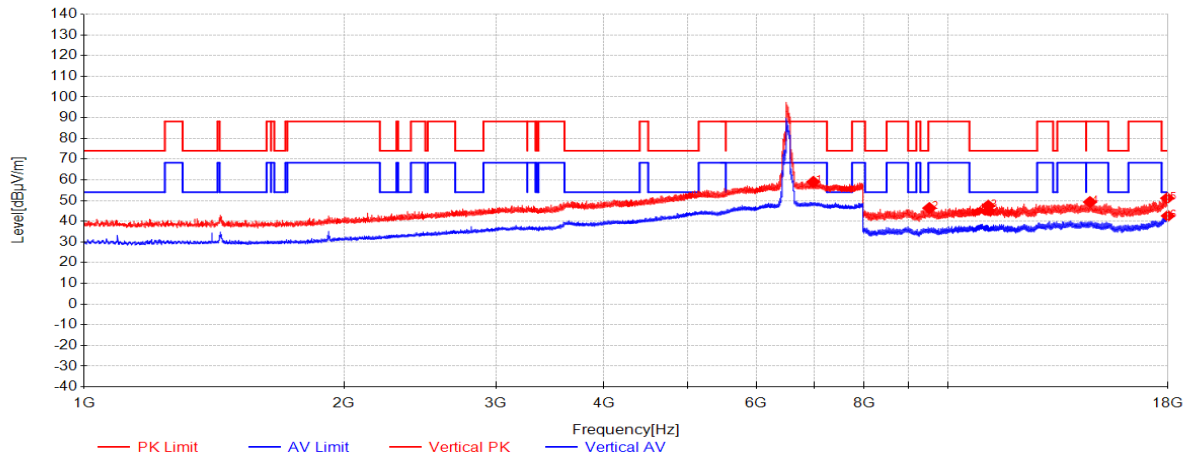


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6988.9375	40.01	36.28	-17.28	59.01	88.20	29.19	Vertical
2	9526.3333	46.39	38.05	-38.10	46.35	88.20	41.85	Vertical
3	11145.6667	43.90	39.21	-35.62	47.49	74.00	26.51	Vertical
4	14622.6667	43.34	40.03	-34.09	49.28	88.20	38.92	Vertical
5	17967	40.36	41.60	-30.83	51.14	74.00	22.86	Vertical
6	17997.6667	31.61	41.69	-30.73	42.58	54.00	11.42	Vertical

11be(EHT80)_TX_CH_151_Horizontal

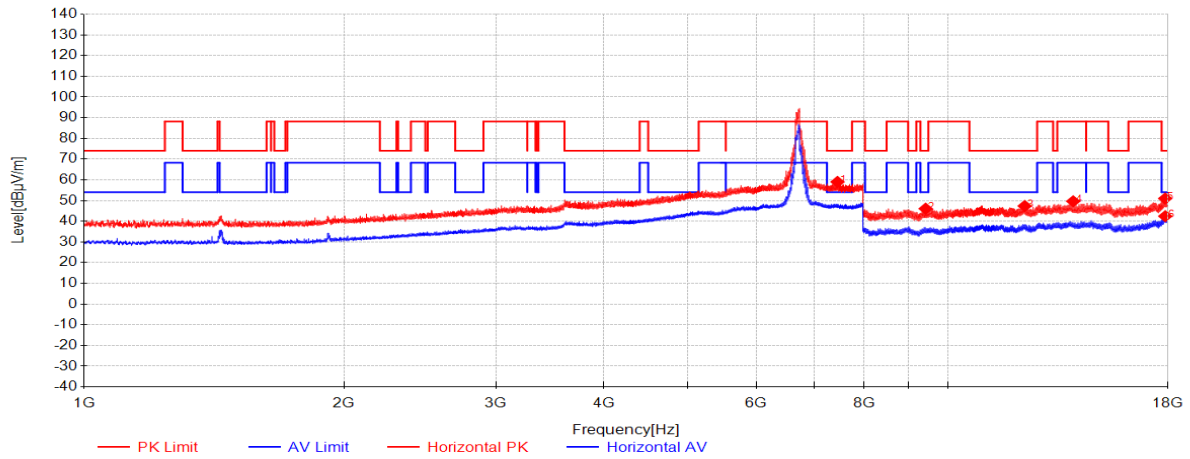


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7455.75	40.71	36.30	-18.01	59.00	74.00	15.00	Horizontal
2	9432	46.30	38.04	-38.29	46.06	74.00	27.94	Horizontal
3	12284.3333	42.70	39.04	-34.37	47.37	74.00	26.63	Horizontal
4	13980.6667	44.11	40.39	-34.87	49.63	88.20	38.57	Horizontal
5	17867	40.50	41.31	-30.80	51.01	74.00	22.99	Horizontal
6	17871.3333	31.96	41.33	-30.83	42.45	54.00	11.55	Horizontal

11be(EHT80)_TX_CH_151_Vertical

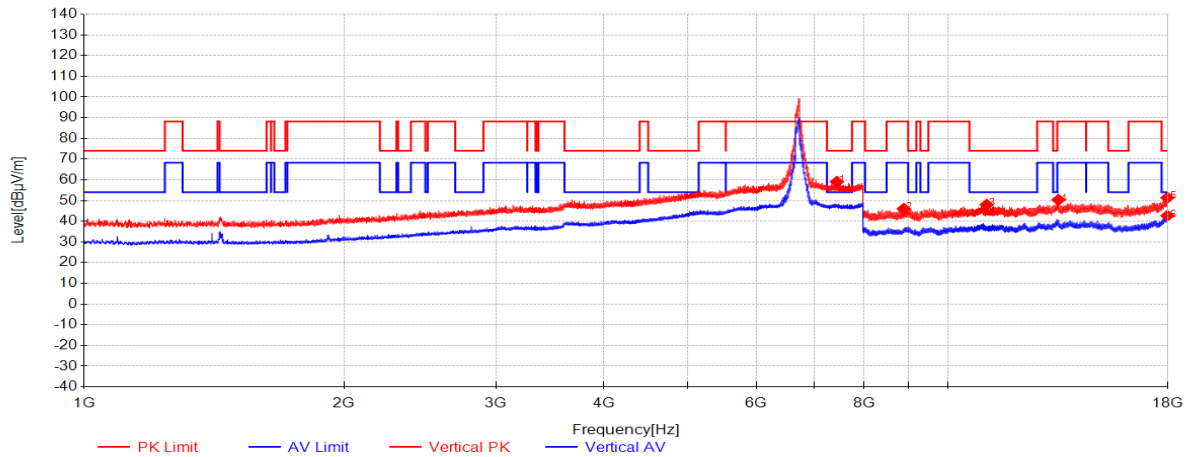


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7443.5	40.71	36.30	-17.95	59.06	74.00	14.94	Vertical
2	8896	47.13	37.93	-39.02	46.03	88.20	42.17	Vertical
3	11098	44.33	39.24	-35.59	47.98	74.00	26.02	Vertical
4	13437.3333	44.99	40.12	-34.77	50.34	88.20	37.86	Vertical
5	17972.3333	40.57	41.62	-30.81	51.38	74.00	22.62	Vertical
6	17974.6667	31.83	41.63	-30.80	42.66	54.00	11.34	Vertical

11be(EHT80)_TX_CH_183_Horizontal

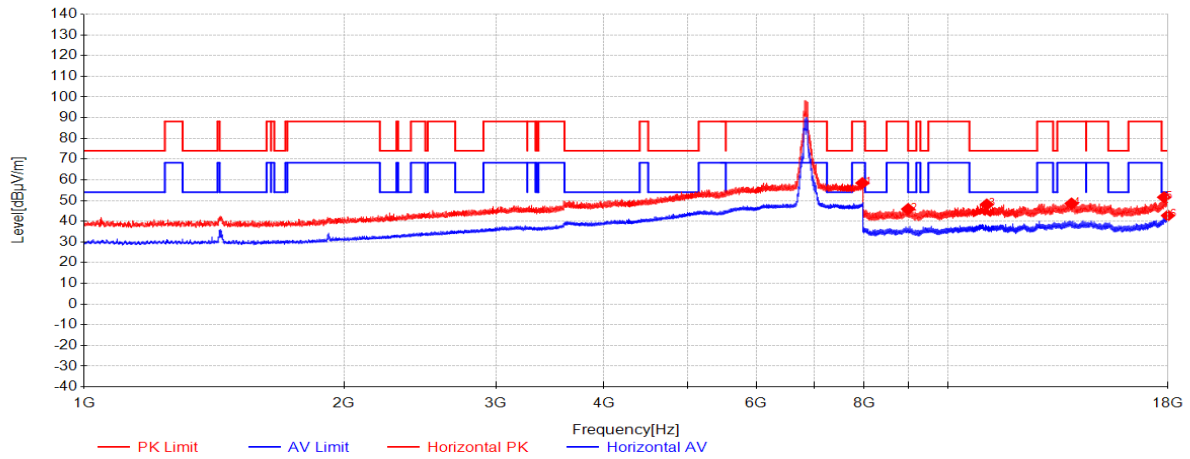

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7968.5	40.01	37.24	-18.81	58.44	88.20	29.76	Horizontal
2	9000.3333	46.42	38.00	-38.53	45.89	74.00	28.11	Horizontal
3	11100.6667	44.42	39.24	-35.59	48.07	74.00	25.93	Horizontal
4	13919	42.65	40.36	-34.44	48.57	88.20	39.63	Horizontal
5	17817.6667	40.85	41.17	-30.45	51.57	74.00	22.43	Horizontal
6	17998.6667	31.78	41.70	-30.72	42.75	54.00	11.25	Horizontal

11be(EHT80)_TX_CH_183_Vertical

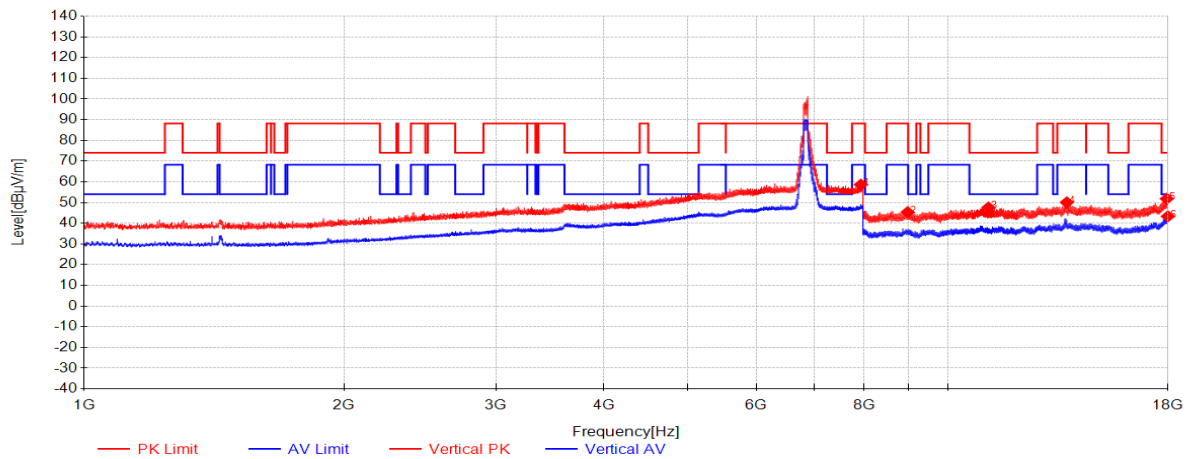

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7934.8125	40.30	37.17	-18.83	58.64	88.20	29.56	Vertical
2	8989.3333	45.93	37.99	-38.58	45.34	88.20	42.86	Vertical
3	11150.6667	44.02	39.21	-35.63	47.60	74.00	26.40	Vertical
4	13742.3333	44.64	40.27	-34.85	50.07	88.20	38.13	Vertical
5	17946.3333	41.21	41.54	-30.89	51.86	74.00	22.14	Vertical
6	17994	32.39	41.68	-30.74	43.33	54.00	10.67	Vertical