



REGULATORY COMPLIANCE TEST REPORT

**FCC CFR 47 Part 15 Subpart C 15.247 DTS
ISED RSS-247 Issue 4 July 2025**

Report No.: DIGI140-U6 Rev A (BLE)

Company: Digi International Inc.

Model Name: XB3P9XR

REGULATORY COMPLIANCE TEST REPORT

Company Name: Digi International Inc.

Model Name: XB3P9XR

To: FCC CFR 47 Part 15 Subpart C 15.247 DTS
ISED RSS-247 Issue 4 July 2025

Test Report Serial No.: DIGI140-U6 Rev A (BLE)

This report supersedes: NONE

Applicant: Digi International Inc.
9350 Excelsior Blvd. Suite 700
Hopkins, Minnesota 55343
USA

Issue Date: 21st January 2026

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory

Table of Contents

1. ACCREDITATION, LISTINGS & RECOGNITION	5
1.1. Testing Accreditation.....	5
1.2. Recognition	6
1.3. Product Certification.....	7
2. DOCUMENT HISTORY	8
3. TEST RESULT CERTIFICATE	9
4. REFERENCES AND MEASUREMENT UNCERTAINTY	10
4.1. Normative References	10
4.2. Test and Uncertainty Procedure	11
5. PRODUCT DETAILS AND TEST CONFIGURATIONS	12
5.1. Technical Details	12
5.2. Scope Of Test Program	13
5.3. Equipment Model(s) and Serial Number(s).....	14
5.4. Cabling and I/O Ports.....	14
5.5. Antenna Details	14
5.6. Test Configurations	15
5.7. Operational Modes.....	15
5.8. Equipment Modifications	15
5.9. Deviations from the Test Standard	15
6. TEST SUMMARY	16
7. TEST EQUIPMENT CONFIGURATION(S).....	17
7.1.1. Radiated Test Setup.....	17
7.1.2. Conducted Test Setup.....	20
8. MEASUREMENT AND PRESENTATION OF TEST DATA	22
9. TEST RESULTS.....	23
9.1. 6 dB & 99% Bandwidth	23
9.2. Conducted Output Power.....	26
9.3. Power Spectral Density	30
9.4. Emissions	33
9.4.1. Conducted Emissions.....	33
9.4.1.1. Conducted Spurious Emissions.....	33
9.4.1.2. Conducted Band-Edge Emissions	36
9.4.2. Radiated Emissions.....	40
9.4.2.3. TX Spurious & Restricted Band Emissions	42
9.4.2.3.1 Bent Metal Antenna / Abracon PRO-OB-440 (installed on Digi PCB)	42
9.4.2.3.2 Dipole / Digi A24-HASM-450	45
9.4.2.3.3 Omni / L-com HG2415U-PRO	48
9.4.2.3.4 Panel / Antaira Tech ANT-PA-2419	51
9.4.2.3.5 Flex / TAOGLAS FXP74.07.0100A	54
9.4.2.3.6 Yagi / TECHTOO STKA-YA24-18SM	57
9.4.2.4. Restricted Band-Edge Emissions	60
9.4.2.4.1 Bent Metal Antenna / Abracon PRO-OB-440 (installed on Digi PCB)	60
9.4.2.4.2 Dipole / Digi A24-HASM-450.....	62
9.4.2.4.3 Omni / L-com HG2415U-PRO	64
9.4.2.4.4 Panel / Antaira Tech ANT-PA-2419	66
9.4.2.4.5 Flex / TAOGLAS FXP74.07.0100A	68
9.4.2.4.6 Yagi / TECHTOO STKA-YA24-18SM Antenna	70

APPENDIX A - GRAPHICAL IMAGES	72
A.1. 6 dB & 99% Bandwidth	73
A.2. Power Spectral Density	79
A.3. Emissions	91
A.3.1. Conducted Emissions	91
A.3.1.1. Conducted Spurious Emissions	91
A.3.1.2. Conducted Band-Edge Emissions	97
A.3.2. Radiated Emissions	101
A.4.2.1 Bent Metal Antenna / Abracon PRO-OB-440 (on Digi board)	101
A.4.2.2 Dipole / Digi A24-HASM-450	104
A.4.2.3 Omni / L-com HG2415U-PRO Antenna	107
A.4.2.4 Panel / Antaira Tech ANT-PA-2419 Antenna	110
A.4.2.5 Flex / TAOGLAS FXP74.07.0100A	113
A.4.2.6 Yagi / TECHTOO STKA-YA24-18SM Antenna	116
A.3.2.3. Restricted Edge & Band-Edge Emissions	119
A.4.2.3.1 Bent Metal Antenna / Abracon PRO-OB-440 (on Digi board)a	119
A.4.2.3.2 Dipole / Digi A24-HASM-450	121
A.4.2.3.3 Omni / L-com HG2415U-PRO Antenna	123
A.4.2.3.4 Panel / Antaira Tech ANT-PA-2419 Antenna	125
A.4.2.3.5 Flex / TAOGLAS FXP74.07.0100A	127
A.4.2.3.6 Yagi / TECHTOO STKA-YA24-18SM Antenna	129
APPENDIX B - TEST SETUP PHOTOGRAPHS	131
B.1. Conducted Test Setup	132
B.2 Radiated Emissions Test Setup (Tx Spurious and Band Edge)	133
B.2.1 Bent Metal Antenna / Abracon PRO-OB-440 (on Digi board)	133
B.2.2 Dipole / Digi A24-HASM-450	136
B.2.3 Omni / L-com HG2415U-PRO	138
B.2.4 Panel / Antaira Tech ANT-PA-2419	140
B.2.5 Flex / TAOGLAS FXP74.07.0100A	142
B.2.6 Yagi / TECHTOO STKA-YA24-18SM	144
APPENDIX C – DECLARATION OF SIMILARITY	146

1. ACCREDITATION, LISTINGS & RECOGNITION

1.1. Testing Accreditation

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2017. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



1.2. Recognition

MiCOM Labs, Inc is widely recognized for its wireless testing and certification capabilities. In addition to being recognized for Testing and Certification under Phase 2 Mutual Recognition Agreements (MRA) with Canada, Europe, United Kingdom and Japan, our international recognition includes Conformity Assessment Body (CAB) designation status under agreements with Asia Pacific (APEC) MRA Phase 1 countries giving acceptance of MiCOM Labs test reports. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	MRA Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Test Firm Designation#: US1084
Canada	Industry Canada (ISED)	FCB	APEC MRA 2	US0159 ISED#: 4143A
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	Japan MRA 2	RCB 210
	Japan Approvals Institute for Telecommunication Equipment (JATE)			
	VCCI			
Europe	European Commission	NB	EU MRA 2	A-0012 NB 2280
United Kingdom	Department for Business, Energy & Industrial Strategy (BEIS)	AB	UK MRA 2	AB 2280
Indonesia	Minister of Communication and Digital Education <i>Keputusan Menteri Komunikasi Dan Digital</i>	Number 13 List of Overseas Test Labs	--	Lab n°50/2025 of Decree n°13
Mexico	Instituto Federal de Telecomunicaciones (IFT)	CAB	Mexico MRA 1	US0159
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)			
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)			
Singapore	Infocomm Development Authority (IDA)			
Taiwan	National Communications Commission (NCC)			
	Bureau of Standards, Metrology and Inspection (BSMI)			
Vietnam	Ministry of Communication (MIC)			

TCB – Telecommunications Certification Bodies (TCB)
 FCB – Foreign Certification Body
 CAB – Conformity Assessment Body
 NB – Notified Body
 AB – Approved Body
 MRA – Mutual Recognition Agreement
 MRA Phase I - recognition for product testing
 Phase II – recognition for both product testing and certification

1.3. Product Certification

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



United States of America – Telecommunication Certification Body (TCB)
Industry Canada – Certification Body, CAB Identifier – US0159
Europe – Notified Body (NB), NB Identifier - 2280
UK – Approved Body (AB), AB Identifier - 2280
Japan – Recognized Certification Body (RCB), RCB Identifier - 210

2. DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	19 th December 2025	Draft for comment
Draft #2	15 th January 2026	Modified Model Names and added Declaration of Similarity section, see Appendix C
Rev A	21 st January 2026	Initial Release

In the above table the latest report revision will replace all earlier versions.

3. TEST RESULT CERTIFICATE

Manufacturer: Digi International Inc. 9350 Excelsior Blvd. Suite 700 Hopkins MN 55343 USA	Tested By: MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Model: XB3P9XR	Telephone: +1 925 462 0304
Type Of Equipment: RF Radio Module	Fax: +1 925 462 0306
S/N's: 0013A2FF5D2507D1	
Test Date(s): 14 th Nov – 18 th Dec 2025	Website: www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC CFR 47 Part 15 Subpart C (15.247 DTS) 15.247 (DTS)	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:

Graeme Grieve
Quality Manager MiCOM Labs, Inc.

Gordon Hurst
President & CEO MiCOM Labs, Inc.



4. REFERENCES AND MEASUREMENT UNCERTAINTY

4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	KDB 662911 D01, D02, D03	D01 Oct 2013, D02 Oct 2011, D03 Oct 2020	Guidance for measurement of output emission of devices that employ single transmitter with multiple outputs or systems with multiple transmitters operating simultaneously in the same frequency band. 662911 D01 Multiple Transmitter Output v02r01, 662911 D02 MIMO with Cross Polarized Antenna v01, 662911 D03 MIMO Antenna Gain Measurement v01, OET 13TR1003 Directional Gain of 802 11 MIMO with CDD 04 05 2013
II	KDB 558074 D01 v05r02	Apr 2019	Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices operating under section 15.247 of the FCC Rules.
III	A2LA R105	24th February 2025	Requirements When Making Reference to A2LA Accreditation Status.
IV	ANSI C63.10	2020	American National Standard for Testing Unlicensed Wireless Devices
V	ANSI C63.4	2014 + 2017 Amendment	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
VI	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
VII	FCC 47 CFR Part 15.247	Apr 2020	Radio Frequency Devices; Subpart C – Intentional Radiators
VIII	ICES-003	Issue 7; Oct 2020	Information Technology Equipment (Including Digital Apparatus)
IX	UKAS M3003	Edition 6 March 2024	The Expression of Uncertainty and Confidence in Measurements
X	RSS-247 Issue 4	July 2025	RSS-247 — Digital Transmission Systems, Frequency Hopping Systems and Licence-Exempt Local Area Network Devices in 902-928 MHz, 2400-2483.5 MHz, 5150-5350 MHz, and 5470-5895 MHz bands.
XI	RSS-Gen Issue 5	Amendment 1,2 (Feb 2021)	General Requirements for Compliance of Radio Apparatus. With Amendments 1: March 2019 and 2: Feb 2021.
XII	FCC 47 CFR Part 2.1033	Feb 2023	FCC requirements and rules regarding photographs and test setup diagrams.
XIII	KDB 789033 D02 V02r01	Dec 2017	Guidelines For Compliance Testing Of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
XIV	UKAS LAB 12	Edition 4 April 2022	The Expression of Uncertainty in Testing

4.2. Test and Uncertainty Procedure

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

5. PRODUCT DETAILS AND TEST CONFIGURATIONS

5.1. Technical Details

Details	Description
Purpose:	Test of the Digi International Inc. XB3P9XR to: FCC CFR 47 Part 15 Subpart C, 15.247 DTS, and ISED RSS-247 Issue 4
Applicant:	Digi International Inc. 9350 Excelsior Blvd. Suite 700 Hopkins MN 55343 USA
Manufacturer:	Same as above
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	DIGI140 – U6
Date EUT received:	3 rd November 2025
Standard(s) applied:	FCC CFR 47 Part 15 Subpart C (15.247 DTS) 15.247 (DTS)
Dates of test (from - to):	14th - 17th November 2025 & 4th - 18th December 2025
No of Units Tested:	1
Product Family Name:	Digi XBee 3 XR PRO / XB3P9XR
Model(s)/Part Numbers:	XB3P-9XR-CMS-001 XB3P-9XR-RMS-001 XB3P-9XR-RUS-001 XB3P-9XR-UMS-001 XB3P-9XR-UUS-001
Location for use:	Both indoor and outdoor
Declared Frequency Range(s):	2400 - 2483.5 MHz;
Type of Modulation:	GFSK
EUT Modes of Operation:	BLE-1M; BLE-2M
Declared Nominal Output Power (dBm):	+7 dBm
Transmit/Receive Operation:	1
Rated Input Voltage and Current:	2.6V to 3.6V (3.3V nominal) / 1.5A
Operating Temperature Range:	-40°C to +85°C (Client Declared)
ITU Emission Designator:	2M00F1D
Equipment Dimensions:	22.03 / 3.05 / 33.82 mm
Weight:	0.0033 Kg
Hardware Rev:	Not Provided
Software Rev:	Not Provided

5.2. Scope Of Test Program

Digi International Inc. XBP9XR

The scope of the test program was to test the Digi International Inc, XB3P9XR part number/variant XB3P-9XR-UUS-001 in the frequency ranges 2400 - 2483.5 MHz; for compliance against the following specification:

FCC CFR 47 Part 15 Subpart C 15.247 DTS

Radio Frequency Devices; Subpart C – Intentional Radiators

RSS-247 Issue 4 July 2025

RSS-247 — Digital Transmission Systems, Frequency Hopping Systems and License-Exempt Local Area Network Devices in 902-928 MHz, 2400-2483.5 MHz, 5150-5350 MHz, and 5470-5895 MHz bands.

This testing covers the following variants, see Appendix C - Declaration of Similarity:

XB3P-9XR-UUS-001	XB3P-9XR-CMS-001	XB3P-9XR-RMS-001
EUT tested in full	XB3P-9XR-RUS-001	XB3P-9XR-UMS-001

Digi International XB3P-9XR-UUS-001 w/ Development Board

EUT Photos	
	
Part Description	XB3P-9XR-UUS-001
S/N	0013A2FF5D2507D1

5.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description	Mfr	Model/Part No.	Serial No.
EUT	Wireless Module supporting BLE operation	DIGI	XB3P-9XR-UUS-001	0013A2FF5D2507D1
EUT Support	XBee SMT Development Board E207844	DIGI	30015552-03_A	648 947LF
MiCOM Labs Power Supply Support	System DC Power Supply	Agilent	6654A	MY40001826
Support	Laptop Computer	HP	Zbook 15 G3 Info	CND6235VDT

5.4. Cabling and I/O Ports

Port Type	Max Cable Length	# of Ports	Shielded	Conn Type	Data Type	Environment
U.FL	<3m	2	Yes	RF	Digital	Indoor/Outdoor
USB-C	<3m	1	Yes	USB-C female	Digital	Indoor/Outdoor

5.5. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
external	L-COM	HG2415U-PRO	OMNI	15.0	-	360	-	2400 - 2483.5
integral	Abracon	PRO-OB-440	Bent Metal	4.9	-	360	-	2400 - 2483.5
external	Antaira Technologies	¹ ANT-PA-2419	Panel	19.0	-	360	-	2400 - 2483.5
external	Digi International	A24-HASM-450	Dipole	2.1	-	360	-	2400 - 2483.5
external	Taoglas	² FXP70.07.0053A	FPC	1.1	-	360	-	2400 - 2483.5
external	Taoglas	FXP74.07.0100A	FPC	4.0	-	360	-	2400 - 2483.5
external	TECHTOO	³ STKA-YA24-18SM	Yagi	18.0	-	360	-	2400 - 2483.5

BF Gain - Beamforming Gain
Dir BW - Directional BeamWidth
X-Pol - Cross Polarization

¹Antenna ANT-PA-2419 includes a cable loss of 11 dB.

²Taoglas FXP70.07.0053A not tested. Higher gain antenna family evaluated (FXP74.07.0100A)

³Antenna STKA-YA24-18SM has a cable loss of 6 dB.

5.6. Test Configurations

Results for the following configurations are provided in this report:

Operational Mode(s)	Data Rate with Highest Power MBit/s	Channel Frequency (MHz)		
		Low	Mid	High
2400 - 2483.5 MHz				
BLE-1M	1	2,402.00	2,440.00	2,480.00
BLE-2M	2	2,404.00	2,440.00	2,478.00

5.7. Operational Modes

Operating Mode(s)	Operating Mode Description
1Mbps and 2Mbps	DTS

5.8. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

Antenna Modifications

In order for the XB3P9XR to comply with FCC/ISED band-edge requirements the following modifications were required:

- Antenna ANT-PA-2419 includes a cable loss of 11 dB.
- Antenna STKA-YA24-18SM has a cable loss of 6 dB.

5.9. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

6. TEST SUMMARY

List of Measurements

Test Header	Result	Data Link
6 dB & 99% Bandwidth	Complies	View Data
Conducted Output Power	Complies	View Data
Power Spectral Density	Complies	View Data
Emissions	Complies	-
(1) Conducted Emissions	Complies	-
(i) Conducted Spurious Emissions	Complies	View Data
(ii) Conducted Band-Edge Emissions	Complies	View Data
(2) Radiated Emissions	Complies	-
(i) TX Spurious & Restricted Band Emissions	Complies	View Data
(ii) Restricted Edge & Band-Edge Emissions	Complies	View Data
(3) Digital Emissions (0.03 - 1 GHz)	See MiCOM Labs Test Report DIGI140-U2B for FCC Part 15B	-
(4) AC Wireline Emissions	¹ Not Applicable	-


¹XB3P9XR is Vdc powered

7. TEST EQUIPMENT CONFIGURATION(S)


7.1.1. Radiated Test Setup

Test setup diagrams for Radiated Emissions below and above 1 GHz.

Radiated Emissions Below 1GHz Test Setup

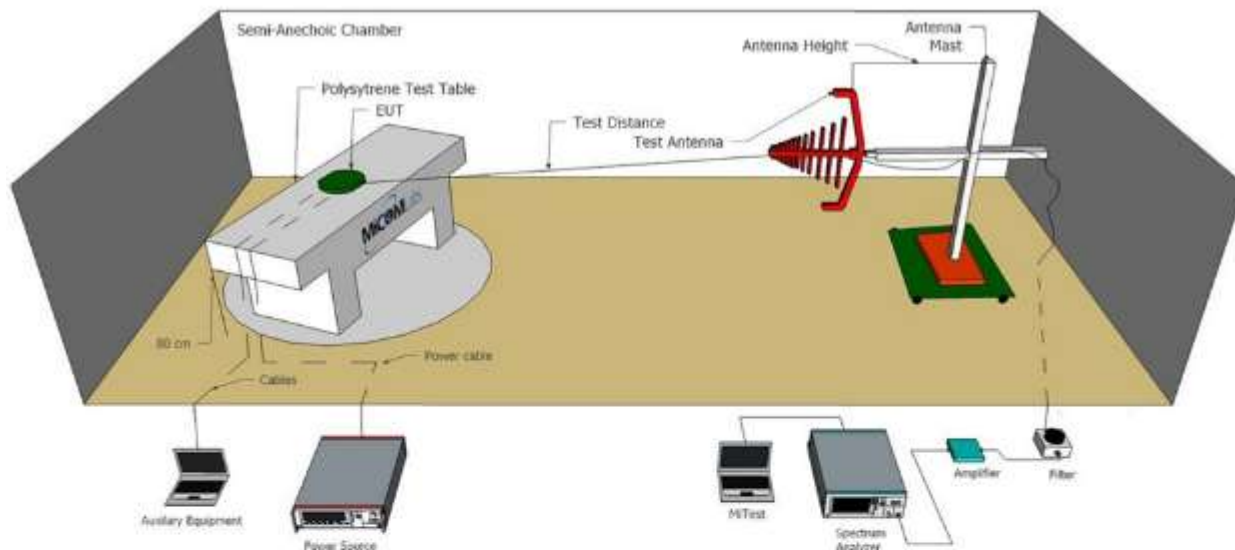

Radiated Emissions Above 1GHz Test Setup

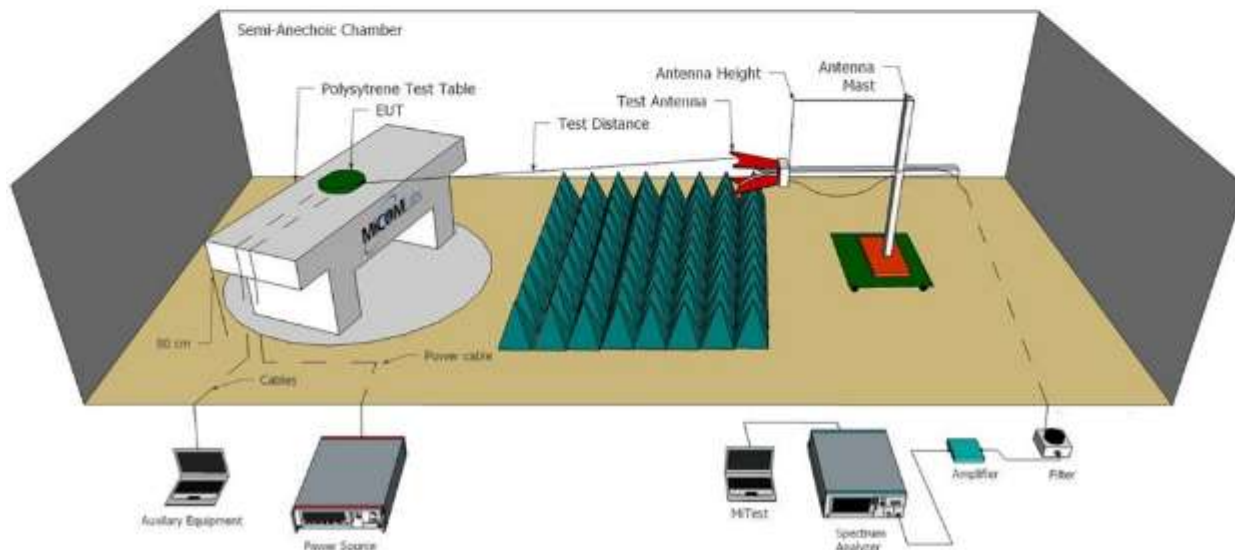


Test Equipment Utilized

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CU101	04R08507	Not Required
298	3M Radiated Emissions Chamber Maintenance Check	MiCOM	3M Chamber	298	22 Mar 2026
330	Variac 0-280 Vac	Staco Energy Co	3PN1020B	0546	Cal when used
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	5 Dec 2026
342	2.4 GHz Notch Filter	EWT	EWT-14-0203	H1	25 Aug 2026
346	1.6 TO 10GHz High Pass Filter	EWT	EWT-57-0112	H1	25 Aug 2026
382	Tunable Notch Filter	Wainwright Instruments GmbH	WRCT800/960-0.2/40-8EEK	64	Cal when used
396	2.4 GHz Notch Filter	Microtronics	BRM50701	001	25 Aug 2026
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	18 Aug 2026
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	7 Dec 2026
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	18 Aug 2026
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
447	MiTest Rad Emissions Test Software	MiCOM	Rad Emissions Test Software Version 1.0	447	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	18 Aug 2026
463	Schwarzbeck cable from Amplifier to Bulkhead.	Schwarzbeck	AK 9513	463	18 Aug 2026
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	18 Aug 2026

465	Low Pass Filter DC-1000 MHz	Mini-Circuits	NLP-1200+	VUU01901402	18 Aug 2026
480	Cable - Bulkhead to Amp	SRC Haverhill	157-3050360	480	18 Aug 2026
481	Cable - Bulkhead to Receiver	SRC Haverhill	151-3050787	481	18 Aug 2026
510	Barometer/Thermometer	Digi Sense	68000-49	170871375	4 Jan 2027
554	Precision SMA Cable	Fairview Microwave	SCE18060 101-400CM	554	18 Aug 2026
555	Rhode & Schwarz Receiver (Firmware Version : 3.10 SP1)	Rhode & Schwarz	ESW 44	101893	14 Aug 2026
578	DC Power Supply 0 - 60 V, 0 - 15 A	HP	6274B	2537A-08192	Not Required
596	DC Power Supply	Keysight	E36155A	MY63001023	17 Jan 2027
87	Uninterruptible Power Supply	Falcon Electric	ED2000-1/2LC	F3471 02/01	Cal when used
CC-05	Radiated Emissions Confidence Check	MiCOM	CC-05	None	10 Mar 2026

7.1.2. Conducted Test Setup

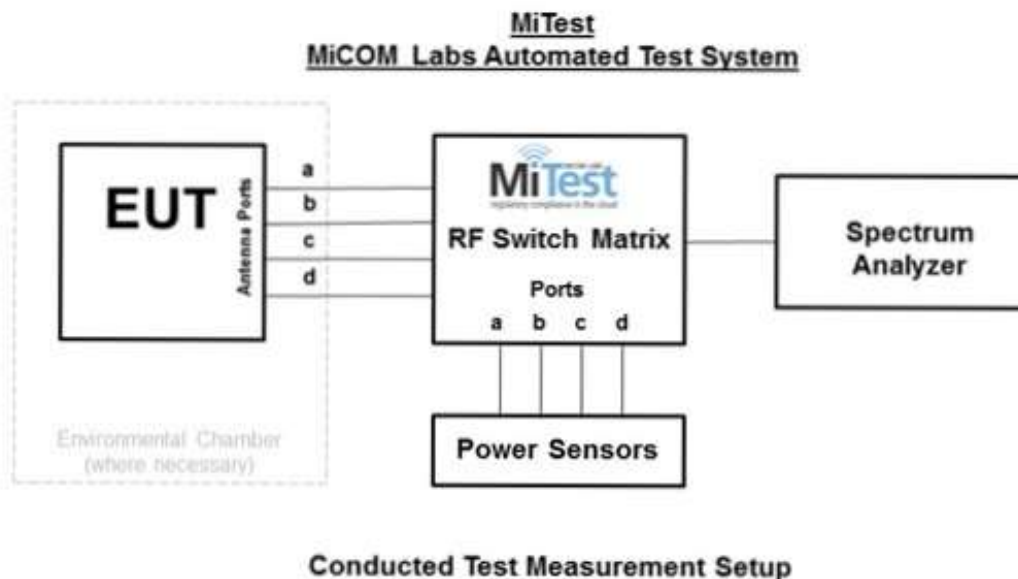

Test Equipment Utilized

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
#3 SA	MiTest Box to SA	Fairview Microwave	SCA1814-0101-72	#3 SA	8 Mar 2026
#3P1	EUT to MiTest box port 1	Fairview Microwave	SCA1814-0101-72	#3P1	8 Mar 2026
#3P2	EUT to MiTest box port 2	Fairview Microwave	SCA1814-0101-72	#3P2	8 Mar 2026
#3P3	EUT to MiTest box port 3	Fairview Microwave	SCA1814-0101-72	#3P3	8 Mar 2026
#3P4	EUT to MiTest box port 4	Fairview Microwave	SCA1812-0101-72	#3P4	8 Mar 2026
249	Thermocouple; Resistance Thermometer	Thermotronics	GR2105-02	9340 #2	22 Mar 2026
266	10 Hz to 50GHz MXA Signal Analyzer	Keysight	N9020B	MY60110791	25 Jul 2026
382	Tunable Notch Filter	Wainwright Instruments GmbH	WRCT800/960-0.2/40-8EEK	64	Cal when used
398	MiTest RF Conducted Test Software	MiCOM	MiTest ATS	Version 4.2.3.0	Not Required

405	DC Power Supply 0-60V	Agilent	6654A	MY4001826	Cal when used
408	USB to GPIB interface	National Instruments	GPIB-USB HS	14C0DE9	Not Required
441	USB Wideband Power Sensor	Boonton	55006	9179	4 Dec 2026
442	USB Wideband Power Sensor	Boonton	55006	9181	12 Dec 2026
445	PoE Injector	D-Link	DPE-101GL	QTAH1E2000625	Not Required
461	Spectrum Analyzer	Agilent	E4440A	MY46185537	21 Aug 2027
494	USB Wideband Power Sensor	Boonton	55006	9726	12 Dec 2026
510	Barometer/Thermometer	Digi Sense	68000-49	170871375	4 Jan 2027
512	MiTest Cloud Solutions RF Test Box	MiCOM	2nd Gen	512	8 Mar 2026
516	USB Wideband Power Sensor	Boonton	RTP5006	10511	4 Dec 2026
555	Rhode & Schwarz Receiver (Firmware Version : 3.10 SP1)	Rhode & Schwarz	ESW 44	101893	14 Aug 2026
592	Harmonic Mixer, 140 GHz to 220 GHz	Radiometer Physics	RPG FS-Z220	101105	7 Jun 2026
593	Harmonic Mixer, 90 GHz to 140 GHz	Radiometer Physics	RPG FS-Z140	101197	2 Aug 2026
596	DC Power Supply	Keysight	E36155A	MY63001023	17 Jan 2027
75	Environmental Chamber	Thermatron	SE-300-2-2	27946	20 Jun 2026

8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

9. TEST RESULTS

9.1. 6 dB & 99% Bandwidth

Conducted Test Conditions for 6 dB and 99% Bandwidth			
Standard:	FCC CFR 47:15.247, RSS-247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	6 dB and 99 % Bandwidth	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (a)(2)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		
Test Procedure for 6 dB and 99% Bandwidth Measurement The bandwidth at 6 dB and 99 % was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency. Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported. Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document. Limits for 6 dB and 99% Bandwidth (a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions: (2) Systems using digital modulation techniques may operate in the 902-928 MHz and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.			

Equipment Configuration for 6 dB & 99% Bandwidth

Variant:	BLE-1M	Duty Cycle (%):	48
Data Rate:	1.00 MBit/s	Antenna Gain (dBi):	2.1
Modulation:	1M-GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest	KHz	MHz
MHz	a	b	c	d				
2402.0	0.741	--	--	--	0.741	0.741	≥500.0	-0.24
2440.0	0.741	--	--	--	0.741	0.741	≥500.0	-0.24
2480.0	0.741	--	--	--	0.741	0.741	≥500.0	-0.24

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
2402.0	1.054	--	--	--	1.054		
2440.0	1.042	--	--	--	1.042		
2480.0	1.046	--	--	--	1.046		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for 6 dB & 99% Bandwidth

Variant:	BLE-2M	Duty Cycle (%):	51
Data Rate:	2.00 MBit/s	Antenna Gain (dBi):	2.1
Modulation:	2M-GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest	KHz	MHz
MHz	a	b	c	d				
2404.0	1.098	--	--	--	1.098	1.098	≥500.0	-0.60
2440.0	1.102	--	--	--	1.102	1.102	≥500.0	-0.60
2478.0	1.102	--	--	--	1.102	1.102	≥500.0	-0.60

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
2404.0	1.872	--	--	--	1.872		
2440.0	1.868	--	--	--	1.868		
2478.0	1.876	--	--	--	1.876		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.2. Conducted Output Power

Conducted Test Conditions for Fundamental Emission Output Power			
Standard:	FCC CFR 47:15.247, RSS-247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Output Power	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (b) & (c)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Fundamental Emission Output Power Measurement

In the case of average power measurements an average power sensor was utilized.

For peak power measurements the spectrum analyzer built-in power function was used to integrate peak power over the 20 dB bandwidth.

Testing was performed under ambient conditions at nominal voltage only. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured, summed (Σ) and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Supporting Information

Calculated Power = A + G + Y+ 10 log (1/x) dBm

A = Total Power [$10 \cdot \text{Log}_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})$]

G = Antenna Gain

Y = Beamforming Gain

x = Duty Cycle (average power measurements only)

Limits for Fundamental Emission Output Power

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following for non-frequency hopping systems:

(3) For systems using digital modulation in the 902-928 MHz and 2400-2483.5 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(iii) Fixed, point-to-point operation, as used in paragraphs (c)(1)(i) and (c)(1)(ii) of this section, excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum or digitally modulated intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

(2) In addition to the provisions in paragraphs (b)(3), (b)(4) and (c)(1)(i) of this section, transmitters operating in the 2400-2483.5 MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:

(i) Different information must be transmitted to each receiver.

(ii) If the transmitter employs an antenna system that emits multiple directional beams but does not do emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device, i.e., the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (b)(1) or (b)(3) of this section, as applicable. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as follows:

(A) The directional gain shall be calculated as the sum of $10 \log$ (number of array elements or staves) plus the directional gain of the element or staff having the highest gain.

(B) A lower value for the directional gain than that calculated in paragraph (c)(2)(ii)(A) of this section will be accepted if sufficient evidence is presented, e.g., due to shading of the array or coherence loss in the beamforming.

(iii) If a transmitter employs an antenna that operates simultaneously on multiple directional beams using the same or different frequency channels, the power supplied to each emission beam is subject to the power limit specified in paragraph (c)(2)(ii) of this section. If transmitted beams overlap, the power shall be reduced to ensure that their aggregate power does not exceed the limit specified in paragraph (c)(2)(ii) of this section. In addition, the aggregate power transmitted simultaneously on all beams shall not exceed the limit specified in paragraph (c)(2)(ii) of this section by more than 8 dB.

(iv) Transmitters that emit a single directional beam shall operate under the provisions of paragraph (c)(1) of this section.

Equipment Configuration for Average Output Power

Variant:	BLE-1M	Duty Cycle (%):	48.1
Data Rate:	1.00 MBit/s	Antenna Gain (dBi):	2.1
Modulation:	1M-GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
2402.0	5.99	--	--	--	5.99	30.00	-24.01	PL3
2440.0	5.38	--	--	--	5.38	30.00	-24.62	PL3
2480.0	4.96	--	--	--	4.96	30.00	-25.04	PL3

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	± 1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

Equipment Configuration for Average Output Power

Variant:	BLE-2M	Duty Cycle (%):	50.6
Data Rate:	2.00 MBit/s	Antenna Gain (dBi):	2.1
Modulation:	2M-GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
2404.0	6.12	--	--	--	6.12	30.00	-23.88	PL3
2440.0	5.55	--	--	--	5.55	30.00	-24.45	PL3
2478.0	5.12	--	--	--	5.12	30.00	-24.88	PL3

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	± 1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

9.3. Power Spectral Density

Conducted Test Conditions for Power Spectral Density			
Standard:	FCC CFR 47:15.247, RSS-247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Power Spectral Density	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (e)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Power Spectral Density

The transmitter output was connected to a spectrum analyzer and the measured made in a 3 kHz resolution bandwidth using the analyzer auto-coupled sweep-time. A peak value was found over the full emission bandwidth and the spectrum downloaded for post processing purposes.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. The Peak Power Spectral Density is the highest level found across the emission bandwidth. With multiple antenna port measurements the numerical analyzer data from each port is summed (ā) and a link to this additional graphic is provided.

Testing was performed under ambient conditions at nominal voltage only.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Measure and sum the spectra across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The individual spectra are then summed mathematically in linear power units. Unlike in-band power measurements, in which the sum involves a single measured value (output power) from each output, measurements for compliance with PSD limits involve summing entire spectra across corresponding frequency bins on the various outputs. Consistency is maintained for any device with multiple transmitter outputs to be certain the individual outputs are all aligned with the same span and same number of points. In this instance, the linear power spectrum value within the first spectral bin of output 0 is summed with that in the first spectral bin of output 1, and the first spectral bin of output 2, and so on up to the Nth output to obtain the true value for the first frequency bin of the summed spectrum. The summed spectrum value for each frequency bin is computed in this fashion. These summed spectral values were post processed and the resulting numerical and graphical data presented.

NOTE:

It may be observed that the spectrum in some antenna port plots break the limit line however this in itself does NOT constitute a failure. In all cases a spectrum summation plot is provided in order to prove compliance. A failure occurs only after the summation of all spectrum plots have been summed and are found to be greater than the limit line.

Supporting Information

Calculated Power = $A + 10 \log (1/x)$ dBm

$A = \text{Total Power Spectral Density } [10 \log_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})]$

$x = \text{Duty Cycle}$

Limits Power Spectral Density

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Equipment Configuration for Power Spectral Density - Average

Variant:	BLE-1M	Duty Cycle (%):	48.1
Data Rate:	1.00 MBit/s	Antenna Gain (dBi):	2.1
Modulation:	1M-GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+3.18 dB)	Limit	Margin
	Port(s) (dBm/3KHz)						
MHz	a	b	c	d	dBm/3KHz	dBm/3KHz	dB
2402.0	-14.159	--	--	--	-10.977	8.0	-19.0
2440.0	-14.480	--	--	--	-11.298	8.0	-19.3
2480.0	-13.669	--	--	--	-10.487	8.0	-18.5

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Power Spectral Density - Average

Variant:	BLE-2M	Duty Cycle (%):	50.6
Data Rate:	2.00 MBit/s	Antenna Gain (dBi):	2.1
Modulation:	2M-GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+2.96 dB)	Limit	Margin
	Port(s) (dBm/3KHz)						
MHz	a	b	c	d	dBm/3KHz	dBm/3KHz	dB
2404.0	-13.085	--	--	--	-10.128	8.0	-18.1
2440.0	-14.735	--	--	--	-11.778	8.0	-19.8
2478.0	-15.520	--	--	--	-12.563	8.0	-20.6

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

9.4. Emissions

9.4.1. Conducted Emissions

9.4.1.1. Conducted Spurious Emissions

Conducted Test Conditions for Transmitter Conducted Spurious and Band-Edge Emissions			
Standard:	FCC CFR 47:15.247, RSS-247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Max Unwanted Emission Levels	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (d)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Transmitter Conducted Spurious and Band-Edge Emissions Measurement

Transmitter Conducted Spurious and Band-Edge emissions were measured at a limit of 30 dBc (average detector) or 20 dBc (peak detector) below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Measurements were made while EUT was operating in transmit mode of operation at the appropriate centre frequency closest to the band-edge. Emissions were maximized during the measurement and limits derived from the peak spectral power and drawn on each plot.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. Testing was performed under ambient conditions at nominal voltage only.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Limits Transmitter Conducted Spurious and Band-Edge Emissions

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Equipment Configuration for Conducted Spurious Emissions - Average

Variant:	BLE-1M	Duty Cycle (%):	48
Data Rate:	1.00 MBit/s	Antenna Gain (dBi):	2.1
Modulation:	1M-GFSK	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Frequency Range	Conducted Spurious Emissions - Average (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
2402.0	30.0 - 26000.0	-71.256	-65.72	--	--	--	--	--	--
2440.0	30.0 - 26000.0	-71.286	-66.02	--	--	--	--	--	--
2480.0	30.0 - 26000.0	-70.656	-66.90	--	--	--	--	--	--

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Spurious Emissions - Average

Variant:	BLE-2M	Duty Cycle (%):	51
Data Rate:	2.00 MBit/s	Antenna Gain (dBi):	2.1
Modulation:	2M-GFSK	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Frequency Range	Conducted Spurious Emissions - Average (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
2404.0	30.0 - 26000.0	-71.256	-69.84	--	--	--	--	--	--
2440.0	30.0 - 26000.0	-70.656	-65.49	--	--	--	--	--	--
2478.0	30.0 - 26000.0	-70.656	-67.30	--	--	--	--	--	--

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.4.1.2. Conducted Band-Edge Emissions

Equipment Configuration for Conducted Low Band-Edge Emissions - Average

Variant:	BLE-1M	Duty Cycle (%):	48.1
Data Rate:	1.00 MBit/s	Antenna Gain (dBi):	2.1
Modulation:	1M-GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	2402.0 MHz					
Band-Edge Frequency:	2400.0 MHz					
Test Frequency Range:	2350.0 - 2422.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-56.31	-37.30	2400.90	--	--	-0.900

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Low Band-Edge Emissions - Average

Variant:	BLE-2M	Duty Cycle (%):	50.6
Data Rate:	2.00 MBit/s	Antenna Gain (dBi):	2.1
Modulation:	2M-GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	2404.0 MHz					
Band-Edge Frequency:	2400.0 MHz					
Test Frequency Range:	2350.0 - 2422.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-58.36	-38.10	2402.10	--	--	-2.100

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted High Band-Edge Emissions - Average

Variant:	BLE-1M	Duty Cycle (%):	48.1
Data Rate:	1.00 MBit/s	Antenna Gain (dBi):	2.1
Modulation:	1M-GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	2480.0 MHz					
Band-Edge Frequency:	2483.5 MHz					
Test Frequency Range:	2477.5 - 2500.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-63.52	-35.78	2480.90	--	--	-2.600

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted High Band-Edge Emissions - Average

Variant:	BLE-2M	Duty Cycle (%):	50.6
Data Rate:	2.00 MBit/s	Antenna Gain (dBi):	2.1
Modulation:	2M-GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	CC
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	2478.0 MHz					
Band-Edge Frequency:	2483.5 MHz					
Test Frequency Range:	2471.2 - 2511.2 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	(MHz)
a	-66.02	-37.46	2479.90	--	--	-3.600

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ± 2.37 dB, > 40 GHz ± 4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.4.2. Radiated Emissions

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.
- (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to §15.213.
- (4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.
- (6) Transmitters operating under the provisions of subparts D or F of this part.

(7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.

(8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).

(9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).

9.4.2.3. TX Spurious & Restricted Band Emissions

9.4.2.3.1 Bent Metal Antenna / Abracon PRO-OB-440 (installed on Digi PCB)

Equipment Configuration for FCC Spurious Emissions 1-18 GHz

Antenna:	Bent Metal Antenna	Variant:	BLE
Antenna Gain (dBi):	4.9	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2402	Data Rate:	10kbps
Power Setting:	Max	Tested By:	MN

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	1323.00	55.38	2.33	-16.21	41.49	MaxP	Horizontal	199	300	74.0	-32.5	Pass
#2	1901.00	60.64	2.68	-13.86	49.46	MaxP	Vertical	199	209	74.0	-24.5	Pass
#3	1969.00	58.26	2.74	-13.54	47.46	MaxP	Vertical	199	119	74.0	-26.5	Pass
#4	4978.00	56.97	3.90	-12.65	48.22	MaxP	Vertical	199	240	74.0	-25.8	Pass
#5	4978.00	54.75	3.90	-12.65	45.99	MaxP	Horizontal	150	30	74.0	-28.0	Pass
#6	12747.00	53.65	6.16	-8.04	51.77	MaxP	Horizontal	199	0	74.0	-22.2	Pass
#7	12968.00	51.22	6.52	-7.63	50.10	MaxP	Vertical	199	330	74.0	-23.9	Pass
#8	17694.00	49.23	7.82	0.17	57.22	MaxP	Vertical	150	59	74.0	-16.8	Pass
#9	17881.00	48.46	8.07	1.46	57.99	MaxP	Horizontal	150	270	74.0	-16.0	Pass

Test Notes: Bent metal antenna. 2402 MHz 3.3V PS, PS and laptop are on the table. Ceramic antenna used

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/ -4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for FCC Spurious Emissions 1-18 GHz

Antenna:	Bent Metal PRO-OB-440	Variant:	BLE
Antenna Gain (dBi):	4.9	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2440	Data Rate:	1M
Power Setting:	Max	Tested By:	MN

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	1731.00	62.88	2.59	-15.33	50.14	MaxP	Vertical	199	149	74.0	-23.9	Pass
#2	1969.00	59.16	2.74	-13.54	48.36	MaxP	Vertical	199	179	74.0	-25.6	Pass
#3	4978.00	56.06	3.90	-12.65	47.31	MaxP	Vertical	199	239	74.0	-26.7	Pass
#4	8395.00	51.34	5.22	-7.98	48.59	MaxP	Horizontal	150	330	74.0	-25.4	Pass
#5	12611.00	52.50	6.43	-7.36	51.57	MaxP	Horizontal	199	180	74.0	-22.4	Pass
#6	12951.00	52.66	6.52	-7.68	51.49	MaxP	Vertical	150	179	74.0	-22.5	Pass
#7	17745.00	48.27	8.06	0.56	56.89	MaxP	Vertical	150	119	74.0	-17.1	Pass
#8	17881.00	47.61	8.07	1.46	57.14	MaxP	Horizontal	199	240	74.0	-16.9	Pass

Test Notes: Bent metal antenna. 2440 MHz 3.3V PS, PS and laptop are on the table. Ceramic antenna used

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/ -4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for FCC Spurious Emissions 1-18 GHz

Antenna:	Bent Metal Antenna	Variant:	BLE
Antenna Gain (dBi):	4.9	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2480	Data Rate:	10kbps
Power Setting:	Max	Tested By:	MN

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	1323.00	55.79	2.33	-16.21	41.91	MaxP	Vertical	150	119	74.0	-32.1	Pass
#2	1799.00	63.40	2.65	-14.67	51.38	MaxP	Vertical	199	269	74.0	-22.6	Pass
#3	1901.00	58.51	2.68	-13.86	47.33	MaxP	Vertical	199	179	74.0	-26.7	Pass
#4	4978.00	55.53	3.90	-12.65	46.78	MaxP	Horizontal	199	60	74.0	-27.2	Pass
#5	5403.00	51.03	4.29	-11.35	43.96	MaxP	Horizontal	150	60	74.0	-30.0	Pass
#6	12458.00	49.47	5.88	-6.07	49.28	MaxP	Vertical	199	210	74.0	-24.7	Pass
#7	12934.00	52.28	6.33	-7.73	50.89	MaxP	Horizontal	199	150	74.0	-23.1	Pass
#8	17864.00	48.96	7.77	1.31	58.05	MaxP	Horizontal	150	90	74.0	-16.0	Pass
#9	17881.00	47.92	8.07	1.46	57.45	MaxP	Vertical	150	0	74.0	-16.5	Pass

Test Notes: Bent metal antenna. 2480 MHz 3.3V PS, PS and laptop are on the table. Bent Metal antenna used

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/ -4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.4.2.3.2 Dipole / Digi A24-HASM-450

Equipment Configuration for FCC Spurious Emissions 1-18 GHz

Antenna:	Dipole A-24-HASM-450	Variant:	BLE
Antenna Gain (dBi):	2.1	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2402	Data Rate:	10kbps
Power Setting:	Max	Tested By:	MN

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	1731.00	60.04	2.59	-15.33	47.30	MaxP	Vertical	199	150	74.0	-26.7	Pass
#2	1918.00	61.39	2.67	-13.81	50.24	MaxP	Vertical	150	179	74.0	-23.8	Pass
#3	2394.00	54.24	3.02	-12.11	45.15	MaxP	Vertical	150	179	74.0	-28.9	Pass
#4	4791.00	56.83	3.84	-12.31	48.35	MaxP	Horizontal	150	300	74.0	-25.6	Pass
#5	4978.00	56.57	3.90	-12.65	47.82	MaxP	Vertical	199	89	74.0	-26.2	Pass
#6	7205.00	54.12	4.52	-7.46	51.17	MaxP	Vertical	150	239	74.0	-22.8	Pass
#7	9041.00	51.42	5.35	-7.08	49.68	MaxP	Vertical	150	29	74.0	-24.3	Pass
#8	9908.00	49.85	5.71	-5.67	49.89	MaxP	Horizontal	199	300	74.0	-24.1	Pass
#9	17898.00	47.52	7.94	1.36	56.82	MaxP	Horizontal	199	60	74.0	-17.2	Pass
#10	17949.00	48.30	8.05	0.80	57.15	MaxP	Vertical	199	29	74.0	-16.8	Pass

Test Notes: Dipole A-24-HASM-450. 2402 MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/-4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for FCC Spurious Emissions 1-18 GHz

Antenna:	Dipole A-24-HASM-450	Variant:	BLE
Antenna Gain (dBi):	2.1	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2440	Data Rate:	10kbps
Power Setting:	Max	Tested By:	MN

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	1918.00	60.66	2.67	-13.81	49.52	MaxP	Vertical	150	179	74.0	-24.5	Pass
#2	2428.00	53.08	3.04	-11.89	44.23	MaxP	Vertical	150	29	74.0	-29.8	Pass
#3	4876.00	59.96	3.92	-12.48	51.40	MaxP	Horizontal	150	300	74.0	-22.6	Pass
#4	4978.00	56.77	3.90	-12.65	48.02	MaxP	Vertical	199	209	74.0	-26.0	Pass
#5	7324.00	52.94	4.56	-7.45	50.05	MaxP	Vertical	150	0	74.0	-23.9	Pass
#6	8548.00	49.96	5.15	-7.97	47.14	MaxP	Horizontal	199	300	74.0	-26.9	Pass
#7	12968.00	53.67	6.52	-7.63	52.56	MaxP	Vertical	199	29	74.0	-21.4	Pass
#8	14396.00	53.34	6.72	-6.28	53.77	MaxP	Horizontal	150	240	74.0	-20.2	Pass
#9	17235.00	49.65	7.56	0.35	57.55	MaxP	Vertical	150	269	74.0	-16.5	Pass
#10	17983.00	49.33	7.74	0.62	57.70	MaxP	Horizontal	199	90	74.0	-16.3	Pass

Test Notes: Dipole A-24-HASM-450. 2440 MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/ -4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for FCC Spurious Emissions 1-18 GHz

Antenna:	Dipole A-24-HASM-450	Variant:	BLE
Antenna Gain (dBi):	2.1	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2480	Data Rate:	10kbps
Power Setting:	Max	Tested By:	MN

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	1629.00	61.66	2.49	-16.33	47.81	MaxP	Vertical	150	149	74.0	-26.2	Pass
#2	1680.00	62.28	2.55	-15.85	48.98	MaxP	Vertical	199	119	74.0	-25.0	Pass
#3	2479.00	52.76	3.06	-11.72	44.10	MaxP	Vertical	199	90	74.0	-29.9	Pass
#4	4961.00	59.47	3.90	-12.71	50.66	MaxP	Horizontal	150	330	74.0	-23.3	Pass
#5	4961.00	58.8	3.90	-12.71	49.99	MaxP	Vertical	150	0	74.0	-24.0	Pass
#6	7443.00	53.17	4.62	-7.60	50.19	MaxP	Vertical	150	0	74.0	-23.8	Pass
#7	11778.00	50.70	5.45	-5.64	50.52	MaxP	Vertical	150	270	74.0	-23.5	Pass
#8	12509.00	49.91	5.63	-6.50	49.04	MaxP	Horizontal	199	0	74.0	-25.0	Pass
#9	17745.00	47.96	8.06	0.56	56.58	MaxP	Vertical	199	29	74.0	-17.4	Pass
#10	17847.00	48.51	7.67	1.27	57.46	MaxP	Horizontal	150	210	74.0	-16.5	Pass

Test Notes: Dipole A-24-HASM-450. 2480 MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/-4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.4.2.3.3 Omni / L-com HG2415U-PRO

Equipment Configuration for FCC SPURIOUS 1-18 GHz

Antenna:	Omni L-com HG2415U-PRO	Variant:	BLE
Antenna Gain (dBi):	15	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2402	Data Rate:	10kbps
Power Setting:	Max	Tested By:	MN

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	1697.00	64.23	2.52	-15.76	50.99	MaxP	Vertical	199	119	74.0	-23.0	Pass
#2	1850.00	60.97	2.66	-14.40	49.23	MaxP	Vertical	150	270	74.0	-24.8	Pass
#3	2394.00	53.63	3.02	-12.11	44.54	MaxP	Horizontal	150	270	74.0	-29.5	Pass
#4	4808.00	55.63	3.92	-12.48	47.07	MaxP	Vertical	150	330	74.0	-26.9	Pass
#5	4978.00	56.43	3.90	-12.65	47.68	MaxP	Horizontal	150	60	74.0	-26.3	Pass
#6	7205.00	53.77	4.52	-7.46	50.82	MaxP	Vertical	150	90	74.0	-23.2	Pass
#7	12832.00	53.81	6.49	-8.33	51.97	MaxP	Horizontal	150	180	74.0	-22.0	Pass
#8	12900.00	53.42	6.51	-8.16	51.77	MaxP	Vertical	150	299	74.0	-22.2	Pass
#9	17864.00	49.24	7.77	1.31	58.33	MaxP	Vertical	199	90	74.0	-15.7	Pass
#10	17881.00	48.26	8.07	1.46	57.79	MaxP	Horizontal	199	120	74.0	-16.2	Pass

Test Notes: Omni L-com HG2415U-PRO antenna used. 2402 MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/-4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for FCC Spurious Emissions 1-18 GHz

Antenna:	Omni L-com HG2415U-PRO	Variant:	BLE
Antenna Gain (dBi):	15	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2440	Data Rate:	10kbps
Power Setting:	Max	Tested By:	MN

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	1442.00	58.84	2.37	-16.88	44.33	MaxP	Horizontal	199	240	74.0	-29.7	Pass
#2	1629.00	63.25	2.49	-16.33	49.40	MaxP	Vertical	199	149	74.0	-24.6	Pass
#3	1850.00	58.86	2.66	-14.40	47.12	MaxP	Vertical	199	269	74.0	-26.9	Pass
#4	2428.00	54.82	3.04	-11.89	45.97	MaxP	Horizontal	150	270	74.0	-28.0	Pass
#5	3601.00	54.19	3.33	-11.85	45.67	MaxP	Vertical	199	209	74.0	-28.3	Pass
#6	4876.00	59.61	3.92	-12.48	51.05	MaxP	Horizontal	150	180	74.0	-22.9	Pass
#7	4978.00	55.62	3.90	-12.65	46.87	MaxP	Vertical	199	89	74.0	-27.1	Pass
#8	7324.00	54.14	4.56	-7.45	51.25	MaxP	Vertical	150	29	74.0	-22.7	Pass
#9	12492.00	51.48	6.01	-6.42	51.08	MaxP	Vertical	199	330	74.0	-22.9	Pass
#10	17915.00	48.38	7.75	1.20	57.34	MaxP	Horizontal	199	90	74.0	-16.7	Pass

Test Notes: Omni L-com HG2415U-PRO antenna used. 2440 MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/-4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for FCC SPURIOUS 1-18 GHz

Antenna:	Omni L-com HG2415U-PRO	Variant:	BLE
Antenna Gain (dBi):	15	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2480	Data Rate:	10kbps
Power Setting:	Max	Tested By:	MN

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	1612.00	65.61	2.49	-16.39	51.71	MaxP	Vertical	199	269	74.0	-22.3	Pass
#2	1748.00	59.98	2.58	-15.10	47.46	MaxP	Vertical	199	149	74.0	-26.5	Pass
#3	1884.00	58.18	2.64	-14.08	46.74	MaxP	Horizontal	150	240	74.0	-27.3	Pass
#4	4961.00	58.97	3.90	-12.71	50.16	MaxP	Horizontal	150	180	74.0	-23.8	Pass
#5	7443.00	53.58	4.62	-7.60	50.60	MaxP	Vertical	150	90	74.0	-23.4	Pass
#6	12900.00	51.83	6.51	-8.16	50.18	MaxP	Vertical	150	330	74.0	-23.8	Pass
#7	17813.00	48.10	7.83	1.19	57.11	MaxP	Horizontal	150	240	74.0	-16.9	Pass
#8	17898.00	49.21	7.94	1.36	58.51	MaxP	Vertical	150	90	74.0	-15.5	Pass

Test Notes: Omni L-com HG2415U-PRO antenna used. 2480 MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/-4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.4.2.3.4 Panel / Antaira Tech ANT-PA-2419

Equipment Configuration for FCC Spurious Emissions 1-18 GHz

Antenna:	Panel ANT-PA-2419	Variant:	BLE
Antenna Gain (dBi):	19	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2402	Data Rate:	1M
Power Setting:	Max	Tested By:	MN

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	1680.00	57.04	2.55	-15.85	43.74	MaxP	Horizontal	150	150	74.0	-30.3	Pass
#2	1731.00	60.43	2.59	-15.33	47.69	MaxP	Vertical	150	269	74.0	-26.3	Pass
#3	2394.00	58.70	3.02	-12.11	49.61	MaxP	Vertical	199	0	74.0	-24.4	Pass
#4	4978.00	56.25	3.90	-12.65	47.50	MaxP	Vertical	150	179	74.0	-26.5	Pass
#5	7205.00	54.87	4.52	-7.46	51.92	MaxP	Vertical	150	239	74.0	-22.1	Pass
#6	13801.00	52.77	6.33	-6.61	52.49	MaxP	Horizontal	199	150	74.0	-21.5	Pass
#7	16453.00	49.23	6.88	-0.26	55.85	MaxP	Horizontal	199	60	74.0	-18.1	Pass

Test Notes: Panel ANT-PA-2419 antenna used. 2402MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/ -4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for FCC Spurious Emissions 1-18 GHz

Antenna:	Panel ANT-PA-2419	Variant:	BLE
Antenna Gain (dBi):	19	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2440	Data Rate:	1M
Power Setting:	Max	Tested By:	MN

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	1731.00	60.41	2.59	-15.33	47.67	MaxP	Vertical	199	149	74.0	-26.3	Pass
#2	1816.00	58.80	2.66	-14.49	46.96	MaxP	Vertical	150	209	74.0	-27.0	Pass
#3	2428.00	63.70	3.04	-11.89	54.85	MaxP	Vertical	150	0	74.0	-19.2	Pass
#4	4876.00	57.26	3.92	-12.48	48.70	MaxP	Horizontal	150	150	74.0	-25.3	Pass
#5	4978.00	57.01	3.90	-12.65	48.25	MaxP	Vertical	199	89	74.0	-25.7	Pass
#6	7324.00	53.00	4.56	-7.45	50.11	MaxP	Vertical	199	179	74.0	-23.9	Pass
#7	13240.00	52.92	6.22	-7.47	51.66	MaxP	Horizontal	150	150	74.0	-22.3	Pass
#8	17201.00	50.68	7.13	0.35	58.16	MaxP	Horizontal	199	90	74.0	-15.8	Pass

Test Notes: Panel ANT-PA-2419 antenna used. 2440MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/ -4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for FCC Spurious Emissions 1-18 GHz

Antenna:	Panel ANT-PA-2419	Variant:	BLE
Antenna Gain (dBi):	19	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2480	Data Rate:	1M
Power Setting:	Max	Tested By:	MN

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	1323.00	59.50	2.33	-16.21	45.61	MaxP	Vertical	199	269	74.0	-28.4	Pass
#2	1714.00	62.96	2.58	-15.55	50.00	MaxP	Vertical	199	149	74.0	-24.0	Pass
#3	1850.00	61.05	2.66	-14.40	49.31	MaxP	Vertical	199	269	74.0	-24.7	Pass
#4	2479.00	57.21	3.06	-11.72	48.55	MaxP	Vertical	149	0	74.0	-25.5	Pass
#5	4961.00	59.03	3.90	-12.71	50.22	MaxP	Horizontal	149	180	74.0	-23.8	Pass
#6	7443.00	54.06	4.62	-7.60	51.08	MaxP	Vertical	149	29	74.0	-22.9	Pass
#7	10401.00	50.01	5.61	-4.76	50.87	MaxP	Horizontal	149	330	74.0	-23.1	Pass
#8	17184.00	47.48	7.16	0.45	55.08	MaxP	Vertical	149	149	74.0	-18.9	Pass
#9	17694.00	49.98	7.82	0.17	57.98	MaxP	Horizontal	149	270	74.0	-16.0	Pass

Test Notes: Panel ANT-PA-2419 antenna used. 2480MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/ -4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.4.2.3.5 Flex / TAOGLAS FXP74.07.0100A

Equipment Configuration for FCC Spurious Emissions 1-18 GHz

Antenna:	TAOGLAS	Variant:	BLE
Antenna Gain (dBi):	4	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2402	Data Rate:	10kbps
Power Setting:	Max	Tested By:	MN

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	1323.00	55.46	2.33	-16.21	41.58	MaxP	Horizontal	150	270	74.0	-32.4	Pass
#2	1663.00	61.87	2.54	-16.04	48.37	MaxP	Vertical	150	149	74.0	-25.6	Pass
#3	1799.00	64.96	2.65	-14.67	52.94	MaxP	Vertical	199	270	74.0	-21.1	Pass
#4	4791.00	54.51	3.84	-12.31	46.04	MaxP	Horizontal	150	300	74.0	-28.0	Pass
#5	4978.00	57.13	3.90	-12.65	48.37	MaxP	Vertical	199	209	74.0	-25.6	Pass
#6	7205.00	54.57	4.52	-7.46	51.62	MaxP	Vertical	151	0	74.0	-22.4	Pass
#7	8021.00	52.59	4.78	-7.83	49.55	MaxP	Vertical	150	90	74.0	-24.5	Pass
#8	13767.00	53.07	6.30	-6.70	52.66	MaxP	Horizontal	150	330	74.0	-21.3	Pass
#9	17864.00	48.08	7.77	1.31	57.17	MaxP	Vertical	150	59	74.0	-16.8	Pass
#10	17864.00	48.09	7.77	1.31	57.18	MaxP	Horizontal	199	210	74.0	-16.8	Pass

Test Notes: TAOGLAS antenna. 2402 MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/ -4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for FCC Spurious Emissions 1-18 GHz

Antenna:	TAOGLAS	Variant:	BLE
Antenna Gain (dBi):	4	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2440	Data Rate:	10kbps
Power Setting:	Max	Tested By:	MN

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	1646.00	57.73	2.52	-16.24	44.01	MaxP	Horizontal	150	240	74.0	-30.0	Pass
#2	1697.00	60.94	2.52	-15.76	47.70	MaxP	Vertical	150	149	74.0	-26.3	Pass
#3	4876.00	60.65	3.92	-12.48	52.09	MaxP	Horizontal	150	300	74.0	-21.9	Pass
#4	4876.00	60.13	3.92	-12.48	51.75	MaxP	Vertical	150	330	74.0	-22.2	Pass
#5	4978.00	57.12	3.90	-12.65	48.36	MaxP	Vertical	199	209	74.0	-25.6	Pass
#6	7324.00	53.70	4.56	-7.45	50.81	MaxP	Vertical	151	0	74.0	-23.2	Pass
#7	12509.00	52.34	5.63	-6.50	51.47	MaxP	Horizontal	150	60	74.0	-22.5	Pass
#8	12968.00	50.96	6.52	-7.63	49.85	MaxP	Vertical	199	179	74.0	-24.2	Pass
#9	16062.00	50.16	6.63	-0.55	56.24	MaxP	Vertical	199	269	74.0	-17.8	Pass
#10	17779.00	48.26	7.65	1.01	56.92	MaxP	Horizontal	150	210	74.0	-17.1	Pass

Test Notes: TAOGLAS antenna. 2440 MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/ -4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for FCC Spurious Emissions 1-18 GHz

Antenna:	TAOGLAS	Variant:	BLE
Antenna Gain (dBi):	4	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2480	Data Rate:	10kbps
Power Setting:	Max	Tested By:	MN

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	1680.00	58.76	2.55	-15.85	45.47	MaxP	Horizontal	150	180	74.0	-28.5	Pass
#2	1731.00	61.04	2.59	-15.33	48.30	MaxP	Vertical	150	149	74.0	-25.7	Pass
#3	1952.00	59.20	2.71	-13.60	48.31	MaxP	Vertical	199	270	74.0	-25.7	Pass
#4	4961.00	60.10	3.90	-12.71	51.29	MaxP	Horizontal	150	330	74.0	-22.7	Pass
#5	4961.00	59.78	3.90	-12.71	50.97	MaxP	Horizontal	150	330	74.0	-23.0	Pass
#6	7443.00	55.33	4.62	-7.60	52.35	MaxP	Vertical	151	0	74.0	-21.6	Pass
#7	11948.00	49.20	4.89	-5.58	48.50	MaxP	Horizontal	199	210	74.0	-25.5	Pass
#8	12968.00	53.14	6.52	-7.63	52.03	MaxP	Vertical	150	330	74.0	-22.0	Pass
#9	17609.00	49.42	7.35	-0.27	56.50	MaxP	Horizontal	150	150	74.0	-17.5	Pass
#10	17881.00	48.05	8.07	1.46	57.58	MaxP	Vertical	150	149	74.0	-16.4	Pass

Test Notes: TAOGLAS antenna. 2480 MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/ -4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.4.2.3.6 Yagi / TECHTOO STKA-YA24-18SM

Equipment Configuration for FCC Spurious Emissions 1-18 GHz

Antenna:	Yagi STKA-YA24-18SM	Variant:	BLE
Antenna Gain (dBi):	18	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2402	Data Rate:	10kbps
Power Setting:	Max	Tested By:	MN

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	1323.00	63.73	2.33	-16.21	49.84	MaxP	Vertical	199	269	74.0	-24.2	Pass
#2	1629.00	64.81	2.49	-16.33	50.96	MaxP	Vertical	149	269	74.0	-23.0	Pass
#3	1629.00	61.31	2.49	-16.33	47.46	MaxP	Horizontal	199	270	74.0	-26.5	Pass
#4	1782.00	64.39	2.59	-14.83	52.15	MaxP	Vertical	149	269	74.0	-21.8	Pass
#5	4791.00	58.55	3.84	-12.31	50.08	MaxP	Horizontal	149	300	74.0	-23.9	Pass
#6	4978.00	57.06	3.90	-12.65	48.30	MaxP	Vertical	199	89	74.0	-25.7	Pass
#7	7205.00	52.80	4.52	-7.46	49.85	MaxP	Vertical	149	239	74.0	-24.1	Pass
#8	12917.00	54.00	6.92	-7.97	52.94	MaxP	Horizontal	149	210	74.0	-21.1	Pass
#9	17779.00	49.22	7.65	1.01	57.87	MaxP	Horizontal	199	90	74.0	-16.1	Pass
#10	17898.00	48.23	7.94	1.36	57.52	MaxP	Vertical	149	179	74.0	-16.5	Pass

Test Notes: Yagi STKA-YA24-18SM antenna used. 2402 MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/-4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for FCC Spurious Emissions 1-18 GHz

Antenna:	Yagi STKA-YA24-18SM	Variant:	BLE
Antenna Gain (dBi):	18	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2440	Data Rate:	10kbps
Power Setting:	Max	Tested By:	MN

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	1714.00	64.04	2.58	-15.55	51.08	MaxP	Vertical	199	150	74.0	-22.9	Pass
#2	1782.00	62.11	2.59	-14.83	49.87	MaxP	Vertical	199	269	74.0	-24.1	Pass
#3	1986.00	56.53	2.73	-13.33	45.93	MaxP	Vertical	149	179	74.0	-28.1	Pass
#4	2428.00	61.64	3.04	-11.89	52.79	MaxP	Horizontal	199	0	74.0	-21.2	Pass
#5	4876.00	58.59	3.92	-12.48	50.03	MaxP	Horizontal	149	300	74.0	-24.0	Pass
#6	4978.00	56.92	3.90	-12.65	48.17	MaxP	Horizontal	149	240	74.0	-25.8	Pass
#7	7324.00	52.62	4.56	-7.45	49.73	MaxP	Vertical	149	0	74.0	-24.3	Pass
#8	17660.00	50.42	7.20	0.03	57.66	MaxP	Horizontal	199	90	74.0	-16.3	Pass
#9	17898.00	48.88	7.94	1.36	58.18	MaxP	Vertical	149	270	74.0	-15.8	Pass

Test Notes: Yagi STKA-YA24-18SM antenna used. 2440 MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/ -4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for FCC SPURIOUS 1 -18 GHZ

Antenna:	Yagi STKA-YA24-18SM	Variant:	BLE
Antenna Gain (dBi):	18	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2480	Data Rate:	10kbps
Power Setting:	Max	Tested By:	MN

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	1697.00	65.92	2.52	-15.76	52.68	MaxP	Vertical	199	149	74.0	-21.3	Pass
#2	1901.00	60.00	2.68	-13.86	48.82	MaxP	Vertical	150	209	74.0	-25.2	Pass
#3	2479.00	55.02	3.06	-11.72	46.36	MaxP	Horizontal	199	0	74.0	-27.6	Pass
#4	4961.00	58.15	3.90	-12.71	49.34	MaxP	Horizontal	150	330	74.0	-24.7	Pass
#5	7443.00	54.64	4.62	-7.60	51.66	MaxP	Vertical	150	0	74.0	-22.3	Pass
#6	13784.00	53.46	6.46	-6.65	53.27	MaxP	Horizontal	150	240	74.0	-20.7	Pass
#7	14175.00	53.36	6.53	-7.21	52.69	MaxP	Vertical	150	0	74.0	-21.3	Pass
#8	17609.00	49.90	7.35	-0.27	56.98	MaxP	Horizontal	199	60	74.0	-17.0	Pass
#9	17949.00	48.39	8.05	0.80	57.24	MaxP	Vertical	150	150	74.0	-16.8	Pass

Test Notes: Yagi STKA-YA24-18SM antenna used. 2480 MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/-4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.4.2.4. Restricted Band-Edge Emissions

9.4.2.4.1 Bent Metal Antenna / Abracon PRO-OB-440 (installed on Digi PCB)

Equipment Configuration for BE 2400 MHz

Antenna:	Bent Metal PRO-OB-440	Variant:	BLE
Antenna Gain (dBi):	4.9	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2402	Data Rate:	1M
Power Setting:	Max	Tested By:	MN

Test Measurement Results

2300.00 - 2430.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	2379.17	16.69	2.97	32.09	51.74	AVG	Vertical	149	89	54.0	-2.3	Pass
#2	2387.88	16.74	2.99	32.13	51.87	AVG	Horizontal	149	60	54.0	-2.1	Pass
#3	2388.66	27.86	3.00	32.14	62.99	MaxP	Vertical	98	179	74.0	-11.0	Pass
#4	2389.44	29.14	3.00	32.14	64.28	MaxP	Horizontal	149	60	74.0	-9.7	Pass

Test Notes: Bent Metal PRO-OB-440 antenna used. 2402MHz 3.3V PS, PS is on the table and laptop is on the table.

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/ -4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for BE 2483.5 MHz

Antenna:	Bent Metal PRO-OB-440	Variant:	BLE
Antenna Gain (dBi):	4.9	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2480	Data Rate:	1M
Power Setting:	Max	Tested By:	MN

Test Measurement Results

2462.00 - 2500.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	2483.58	29.46	3.08	32.41	64.96	MaxP	Vertical	149	149	74.0	-9.0	Pass
#2	2483.74	29.43	3.08	32.41	64.93	MaxP	Horizontal	100	90	74.0	-9.1	Pass
#3	2485.75	17.15	3.09	32.42	52.65	AVG	Horizontal	149	120	54.0	-1.3	Pass
#4	2491.64	17.09	3.09	32.43	52.61	AVG	Vertical	149	89	54.0	-1.4	Pass

Test Notes: Bent metal antenna used. High channel. 3.3V PS, Power Supply is under the table and laptop is on the table.

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/ -4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.4.2.4.2 Dipole / Digi A24-HASM-450

Equipment Configuration for BE 2400 MHz

Antenna:	Dipole antenna	Variant:	BLE
Antenna Gain (dBi):	2.1	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2402	Data Rate:	1M
Power Setting:	Max	Tested By:	MN

Test Measurement Results

2300.00 - 2430.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	2368.77	29.93	2.97	32.04	64.95	MaxP	Horizontal	100	120	74.0	-9.0	Pass
#2	2370.46	29.87	2.98	32.05	64.90	MaxP	Vertical	149	29	74.0	-9.1	Pass
#3	2385.28	16.77	2.98	32.12	51.87	AVG	Vertical	149	0	54.0	-2.1	Pass
#4	2387.62	16.72	2.99	32.13	51.84	AVG	Horizontal	149	150	54.0	-2.2	Pass

Test Notes: Dipole antenna used. 2402MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/ -4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for BE 2483.5 MHz

Antenna:	Dipole antenna	Variant:	BLE
Antenna Gain (dBi):	2.1	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2480	Data Rate:	1M
Power Setting:	Max	Tested By:	MN

Test Measurement Results

2462.00 - 2500.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	2483.51	17.71	3.08	32.41	53.20	AVG	Vertical	100	90	54.0	-0.8	Pass
#2	2483.58	17.56	3.08	32.41	53.05	AVG	Vertical	149	59	54.0	-0.9	Pass
#3	2483.58	30.39	3.08	32.41	65.88	MaxP	Vertical	100	59	74.0	-8.1	Pass
#4	2484.00	29.97	3.08	32.41	65.46	MaxP	Horizontal	149	180	74.0	-8.5	Pass

Test Notes: Dipole antenna used. High channel. 3.3V PS, Power Supply is under the table and laptop is on the table.

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/ -4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.4.2.4.3 Omni / L-com HG2415U-PRO

Equipment Configuration for BE 2400 MHz

Antenna:	Omni HG2415U-PRO antenna	Variant:	BLE
Antenna Gain (dBi):	15	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2402	Data Rate:	1M
Power Setting:	Max	Tested By:	MN

Test Measurement Results

2300.00 - 2430.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	2371.37	29.98	2.98	32.06	65.01	MaxP	Horizontal	149	120	74.0	-9.0	Pass
#2	2375.27	16.72	2.97	32.07	51.77	AVG	Vertical	100	179	54.0	-2.2	Pass
#3	2384.24	16.47	2.97	32.12	51.56	AVG	Horizontal	149	210	54.0	-2.4	Pass
#4	2384.89	29.53	2.98	32.12	64.62	MaxP	Vertical	149	149	74.0	-9.4	Pass

Test Notes: Omni HG2415U-PRO antenna used. 2402MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/ -4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for BE 2483.5 MHz

Antenna:	Omni HG2415U-PRO antenna	Variant:	BLE
Antenna Gain (dBi):	15	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2480	Data Rate:	1M
Power Setting:	Max	Tested By:	MN

Test Measurement Results

2462.00 - 2500.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	2483.51	19.17	3.08	32.41	53.66	AVG	Horizontal	149	270	54.0	-0.3	Pass
#2	2483.96	31.75	3.08	32.41	66.25	MaxP	Horizontal	149	270	74.0	-7.8	Pass
#3	2484.61	17.12	3.08	32.42	51.62	AVG	Vertical	100	209	54.0	-2.4	Pass
#4	2484.84	29.81	3.09	32.42	64.31	MaxP	Vertical	100	29	74.0	-9.7	Pass

Test Notes: Omni antenna used. High channel. 3.3V PS, Power Supply is under the table and laptop is on the table.

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/ -4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.4.2.4.4 Panel / Antaira Tech ANT-PA-2419

Equipment Configuration for BE 2400 MHZ

Antenna:	Panel	Variant:	BLE
Antenna Gain (dBi):	19	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2402	Data Rate:	1M
Power Setting:	Max	Tested By:	MN

Test Measurement Results

2300.00 - 2430.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	2386.19	29.47	2.98	32.12	62.78	MaxP	Vertical	99	29	74.0	-11.2	Pass
#2	2386.45	14.86	2.99	32.13	49.98	AVG	Vertical	99	33	54.0	-4.0	Pass
#3	2388.66	16.68	3.00	32.14	50.01	AVG	Horizontal	149	0	54.0	-4.0	Pass
#4	2389.96	29.01	3.01	32.14	62.35	MaxP	Horizontal	99	90	74.0	-11.6	Pass

Test Notes: Panel Antenna, Low Channel. 3.3V PS, Power Supply is under the table and laptop is on the table. 11 dB cable loss part of the antenna cable.

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/ -4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for BE 2483.5 MHz

Antenna:	ANT-PA02419	Variant:	BLE
Antenna Gain (dBi):	19	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2480	Data Rate:	1M
Power Setting:	Max	Tested By:	SB

Test Measurement Results

2462.00 - 2500.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	2483.55	19.61	3.08	32.41	53.31	AVG	Horizontal	149	0	54.0	-0.7	Pass
#2	2483.62	16.70	3.08	32.41	50.39	AVG	Vertical	149	0	54.0	-3.6	Pass
#3	2483.62	31.38	3.08	32.41	65.08	MaxP	Horizontal	149	0	74.0	-8.9	Pass
#4	2483.62	27.57	3.08	32.41	63.06	MaxP	Vertical	149	0	74.0	-10.9	Pass

Test Notes: Panel Antenna, High Channel. 3.3V PS, Power Supply is under the table and laptop is on the table. 11 dB cable loss is part of the antenna cable.

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/ -4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.4.2.4.5 Flex / TAOGLAS FXP74.07.0100A

Equipment Configuration for BE 2400 MHZ

Antenna:	TAOGLAS FXP74.07.0100A	Variant:	BLE
Antenna Gain (dBi):	4	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2402	Data Rate:	1M
Power Setting:	Max	Tested By:	MN

Test Measurement Results

2300.00 - 2430.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	2379.56	16.72	2.96	32.09	51.77	AVG	Horizontal	100	210	54.0	-2.2	Pass
#2	2385.54	16.77	2.98	32.12	51.87	AVG	Vertical	100	239	54.0	-2.1	Pass
#3	2387.49	28.24	2.99	32.13	63.36	MaxP	Horizontal	149	60	74.0	-10.6	Pass
#4	2388.66	28.01	3.00	32.14	63.14	MaxP	Vertical	149	239	74.0	-10.9	Pass

Test Notes: TAOGLAS FXP74.07.0100A antenna used. 2402MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/ -4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for BE 2483.5 MHz

Antenna:	TAOGLAS FXP74.07.0100A	Variant:	BLE
Antenna Gain (dBi):	4	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2480	Data Rate:	1M
Power Setting:	Max	Tested By:	MN

Test Measurement Results

2462.00 - 2500.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	2485.18	30.06	3.09	32.42	65.56	MaxP	Horizontal	100	180	74.0	-8.4	Pass
#2	2489.97	16.81	3.10	32.43	52.34	AVG	Horizontal	149	0	54.0	-1.7	Pass
#3	2491.60	17.09	3.09	32.43	52.61	AVG	Vertical	100	239	54.0	-1.4	Pass
#4	2492.32	28.20	3.09	32.43	63.72	MaxP	Vertical	100	269	74.0	-10.3	Pass

Test Notes: TAOGLAS FXP74.07.0100A antenna used. 2480MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/ -4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.4.2.4.6 Yagi / TECHTOO STKA-YA24-18SM Antenna

Equipment Configuration for BE 2400 MHZ

Antenna:	Yagi TECHTOO STKA-YA24-18SM	Variant:	BLE
Antenna Gain (dBi):	18	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2402	Data Rate:	1M
Power Setting:	Max	Tested By:	SB

Test Measurement Results

2300.00 - 2430.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	2385.54	31.08	2.98	32.12	64.38	MaxP	Horizontal	98.00	120.00	74.00	-9.62	Pass
#2	2387.36	18.50	2.99	32.13	51.82	AVG	Vertical	149.00	90.00	54.00	-2.18	Pass
#3	2389.05	31.44	3.00	32.14	64.78	MaxP	Vertical	149.00	59.00	74.00	-9.22	Pass
#4	2389.44	18.45	3.00	32.14	51.79	AVG	Horizontal	98.00	60.00	54.00	-2.21	Pass

Test Notes: Yagi Antenna, Low Channel. 3.3V PS, Power Supply is under the table and laptop is on the table. 6 dB cable loss part of the antenna cable.

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/ -4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for BE 2483.5 MHz

Antenna:	Yagi TECHTOO STKA-YA24-18SM	Variant:	BLE
Antenna Gain (dBi):	18	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2480	Data Rate:	1M
Power Setting:	Max	Tested By:	SB

Test Measurement Results

2462.00 - 2500.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
#1	2483.51	19.73	3.08	32.41	53.42	AVG	Horizontal	149.00	0.00	54.00	-0.58	Pass
#2	2483.74	30.84	3.08	32.41	64.54	MaxP	Vertical	101.00	0.00	74.00	-9.46	Pass
#3	2483.77	31.44	3.08	32.41	65.14	MaxP	Horizontal	149.00	0.00	74.00	-8.86	Pass
#4	2489.40	18.80	3.10	32.43	52.53	AVG	Vertical	100.00	59.00	54.00	-1.47	Pass

Test Notes: Yagi Antenna, High Channel. 3.3V PS, Power Supply is under the table and laptop is on the table. 6 dB cable loss part of the antenna cable.

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-07 MEASUREMENT OF RADIATED EMISSIONS
Measurement Uncertainty:	+5.6/ -4.5 dB

Note: click the links in the above matrix to view the graphical image (plot).


APPENDIX A - GRAPHICAL IMAGES

A.1. 6 dB & 99% Bandwidth

6 dB & 99% BANDWIDTH



Variant: BLE-1M, Channel: 2402.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

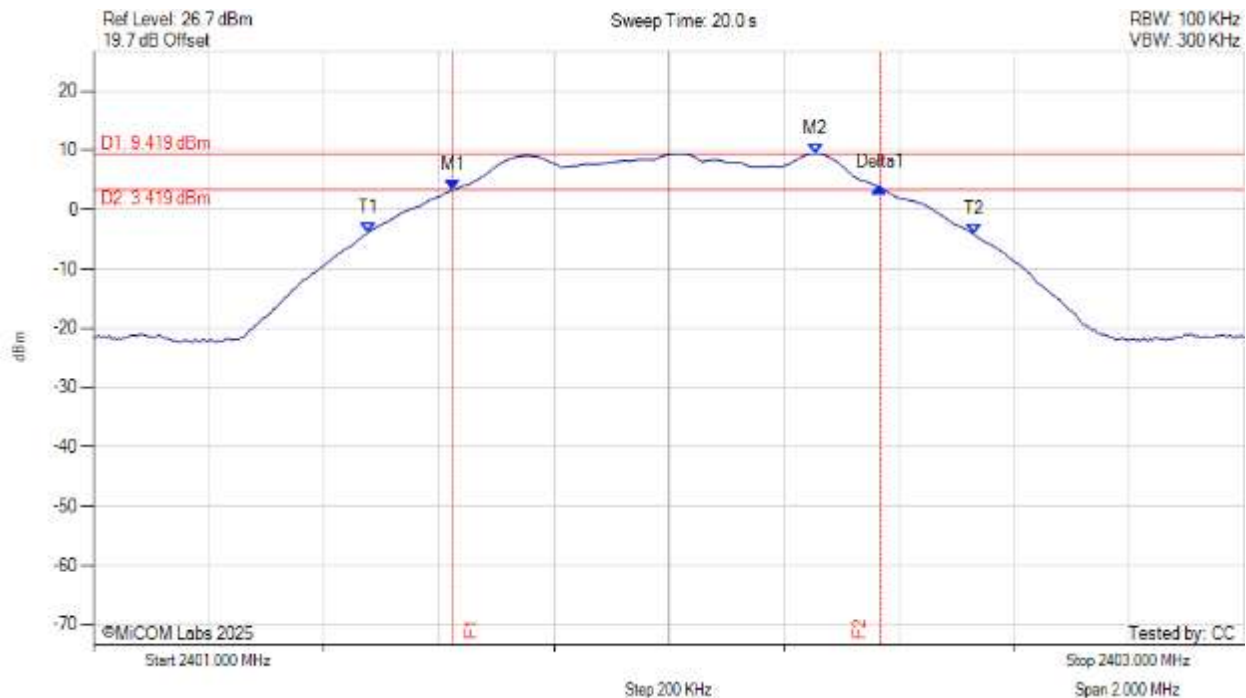

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2401.625 MHz : 3.349 dBm M2 : 2402.255 MHz : 9.419 dBm Delta1 : 741 KHz : 0.439 dB T1 : 2401.477 MHz : -3.859 dBm T2 : 2402.531 MHz : -4.274 dBm OBW : 1.054 MHz	Channel Frequency: 2402.00 MHz Measured 6 dB Bandwidth: 0.741 MHz Limit: ≥ 500.0 kHz Margin: -0.24 MHz

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: BLE-1M, Channel: 2440.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc



Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2439.625 MHz : 2.688 dBm M2 : 2440.010 MHz : 8.764 dBm Delta1 : 741 KHz : 0.338 dB T1 : 2439.481 MHz : -4.500 dBm T2 : 2440.523 MHz : -4.734 dBm OBW : 1.042 MHz	Channel Frequency: 2440.00 MHz Measured 6 dB Bandwidth: 0.741 MHz Limit: ≥500.0 kHz Margin: -0.24 MHz

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: BLE-1M, Channel: 2480.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc




Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2479.625 MHz : 1.618 dBm M2 : 2480.010 MHz : 7.711 dBm Delta1 : 741 KHz : 0.356 dB T1 : 2479.481 MHz : -5.677 dBm T2 : 2480.527 MHz : -5.850 dBm OBW : 1.046 MHz	Channel Frequency: 2480.00 MHz Measured 6 dB Bandwidth: 0.741 MHz Limit: ≥500.0 kHz Margin: -0.24 MHz

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: BLE-2M, Channel: 2404.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

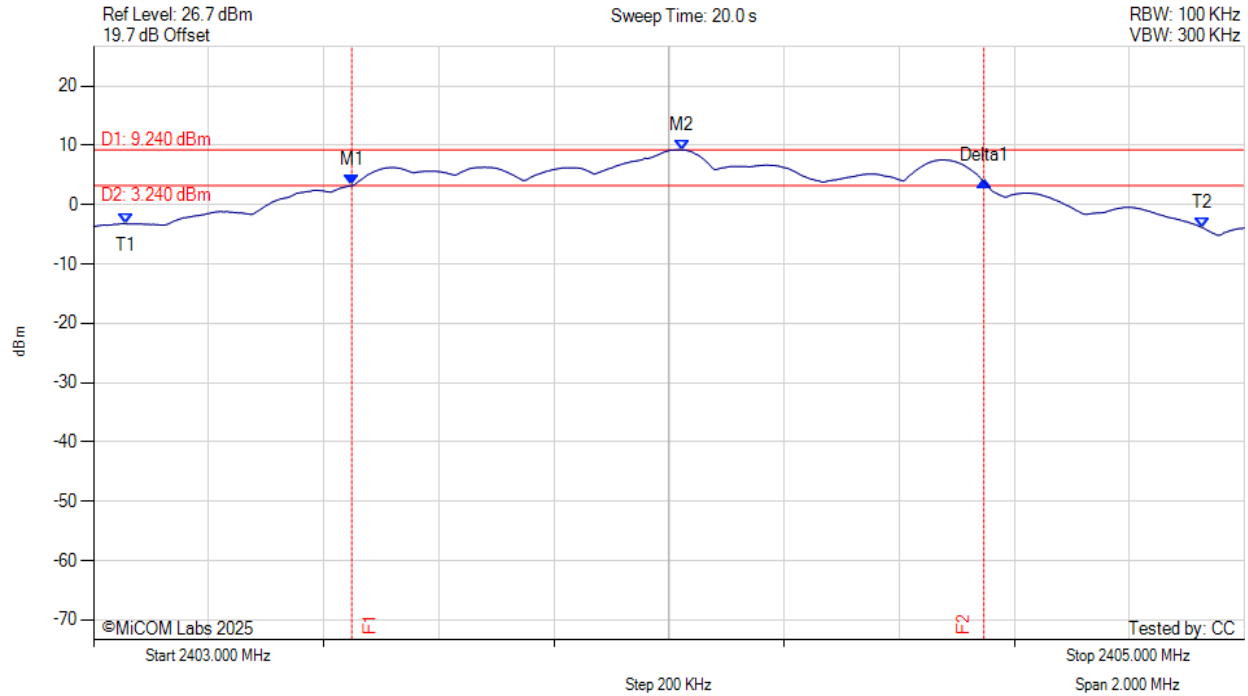


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2403.449 MHz : 3.239 dBm M2 : 2404.022 MHz : 9.240 dBm Delta1 : 1.098 MHz : 0.696 dB T1 : 2403.056 MHz : -3.218 dBm T2 : 2404.928 MHz : -3.910 dBm OBW : 1.872 MHz	Channel Frequency: 2404.00 MHz Measured 6 dB Bandwidth: 1.098 MHz Limit: ≥500.0 kHz Margin: -0.60 MHz

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: BLE-2M, Channel: 2440.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

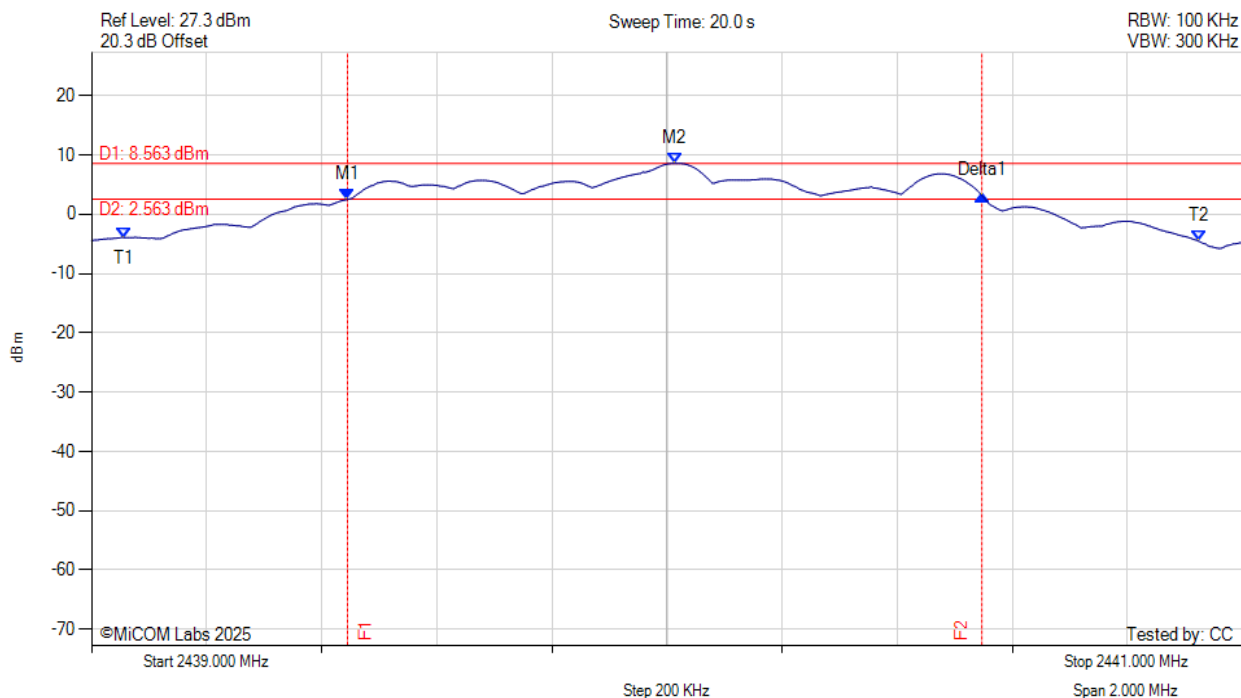


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2439.445 MHz : 2.488 dBm M2 : 2440.014 MHz : 8.563 dBm Delta1 : 1.102 MHz : 0.669 dB T1 : 2439.056 MHz : -3.918 dBm T2 : 2440.924 MHz : -4.538 dBm OBW : 1.868 MHz	Channel Frequency: 2440.00 MHz Measured 6 dB Bandwidth: 1.102 MHz Limit: ≥500.0 kHz Margin: -0.60 MHz

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: BLE-2M, Channel: 2478.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

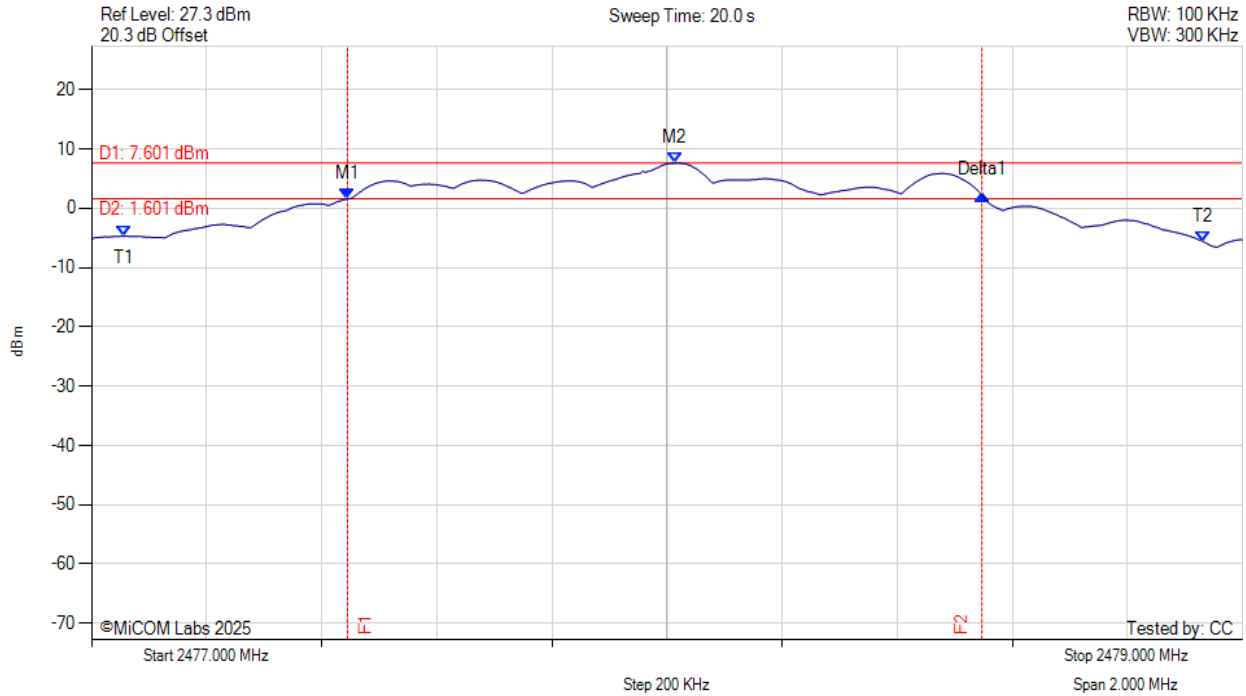


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2477.445 MHz : 1.577 dBm M2 : 2478.014 MHz : 7.601 dBm Delta1 : 1.102 MHz : 0.694 dB T1 : 2477.056 MHz : -4.736 dBm T2 : 2478.932 MHz : -5.624 dBm OBW : 1.876 MHz	Channel Frequency: 2478.00 MHz Measured 6 dB Bandwidth: 1.102 MHz Limit: ≥500.0 kHz Margin: -0.60 MHz

[back to matrix](#)

A.2. Power Spectral Density

POWER SPECTRAL DENSITY - AVERAGE

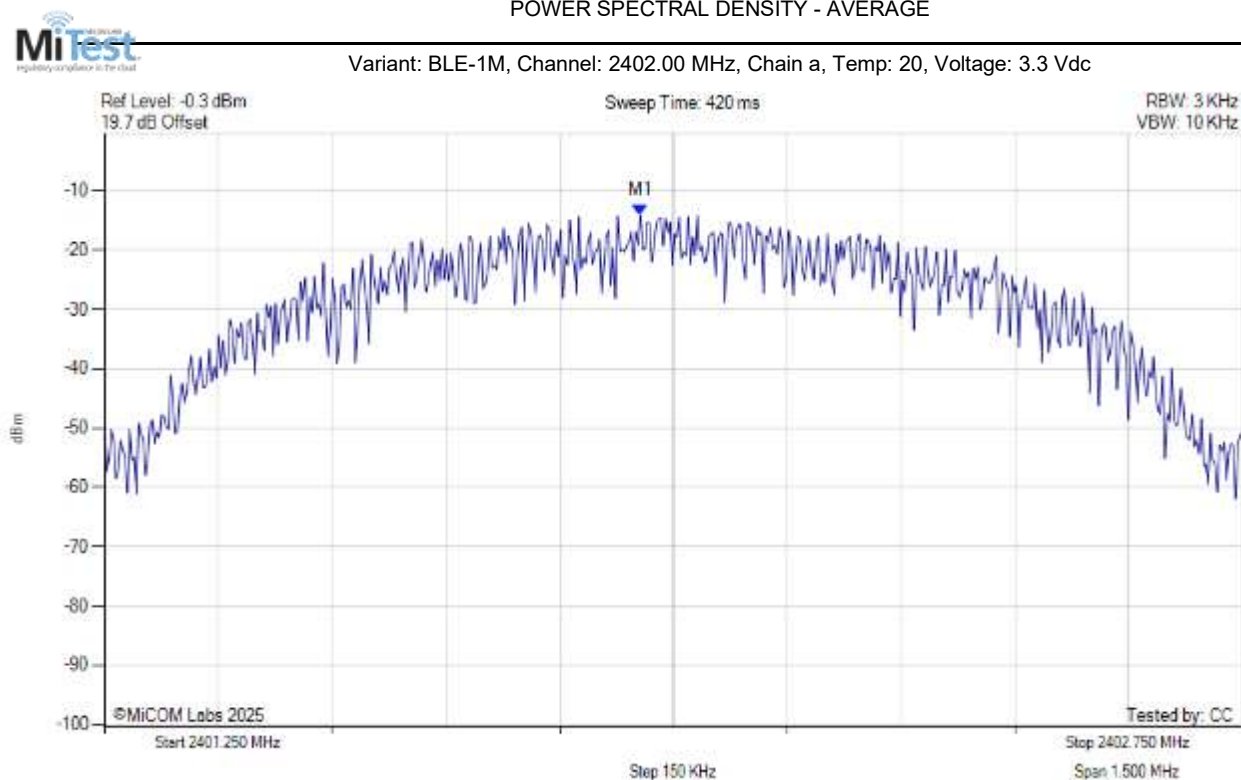


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2401.956 MHz : -14.159 dBm	Channel Frequency: 2402.00 MHz Limit: ≤ 8.000 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: BLE-1M, Channel: 2402.00 MHz, SUM, Temp: 20, Voltage: 3.3 Vdc

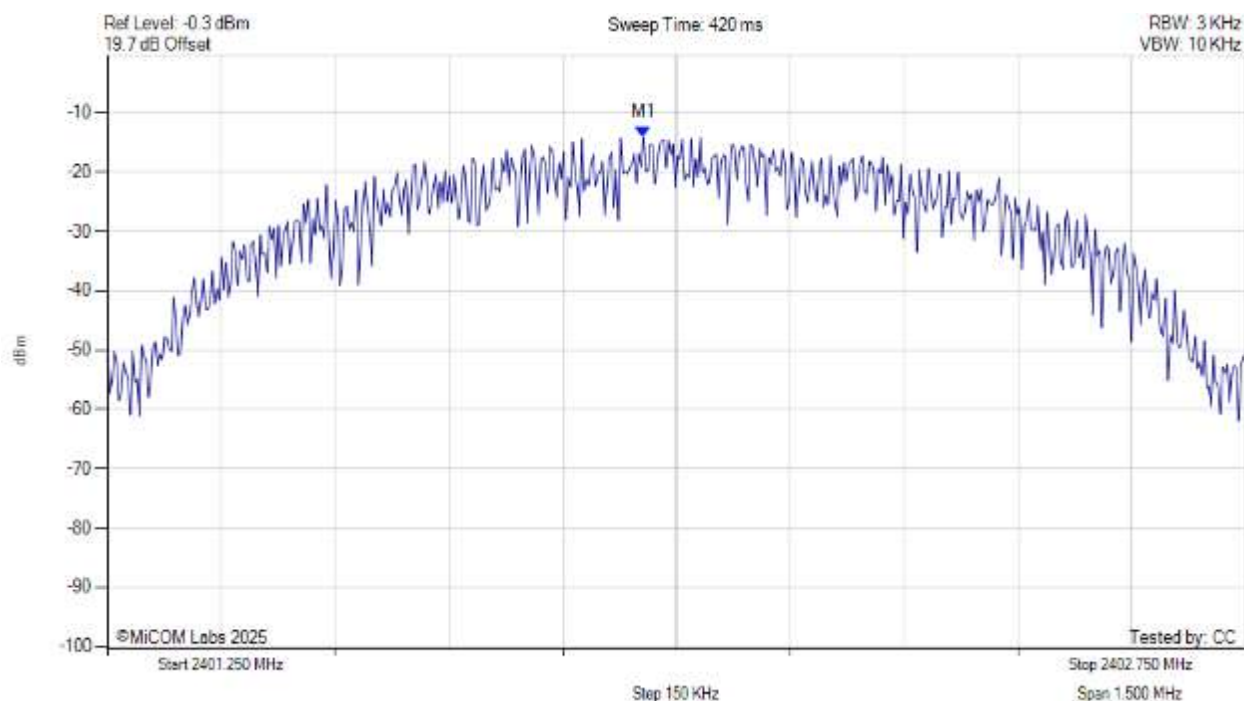


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2401.956 MHz : -14.159 dBm M1 : 2402.000 MHz : -14.159 dBm M1 + DCCF : 2402.000 MHz : -10.977 dBm Duty Cycle Correction Factor : +3.18 dB	Channel Frequency: 2402.00 MHz Limit: ≤ 8.0 dBm Margin: -19.0 dB

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: BLE-1M, Channel: 2440.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

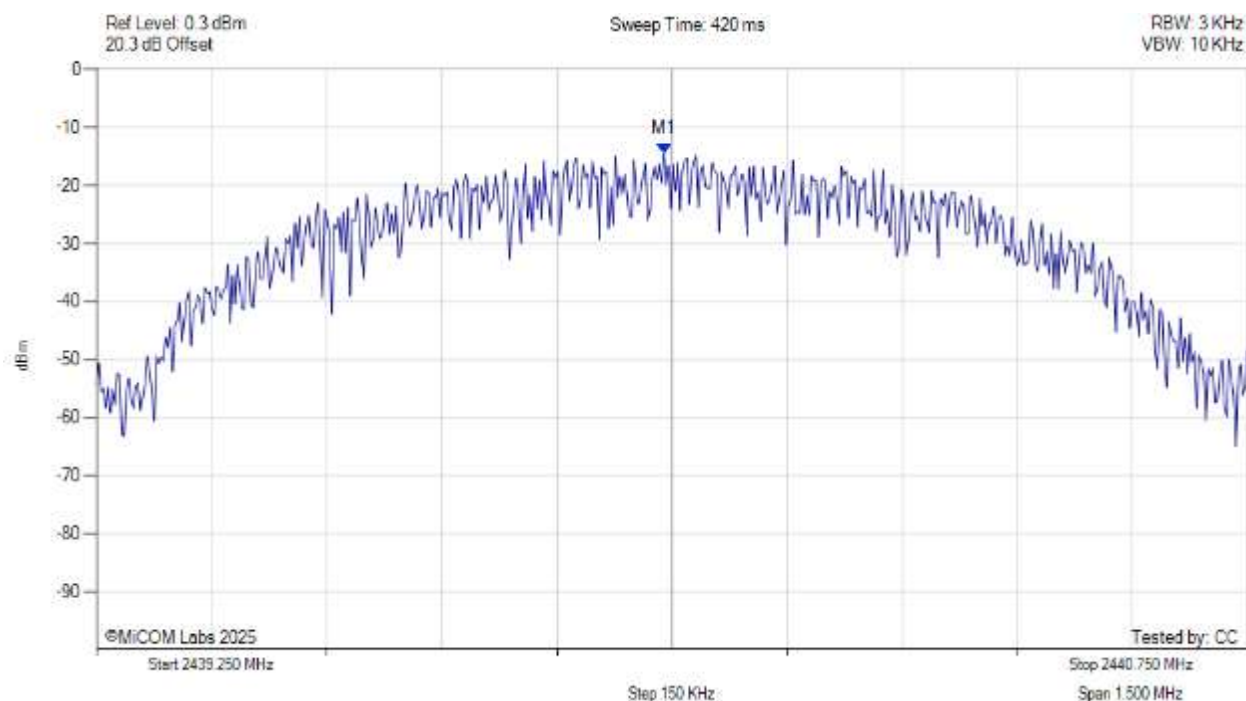


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2439.989 MHz : -14.480 dBm	Channel Frequency: 2440.00 MHz Limit: ≤ 8.000 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: BLE-1M, Channel: 2440.00 MHz, SUM, Temp: 20, Voltage: 3.3 Vdc

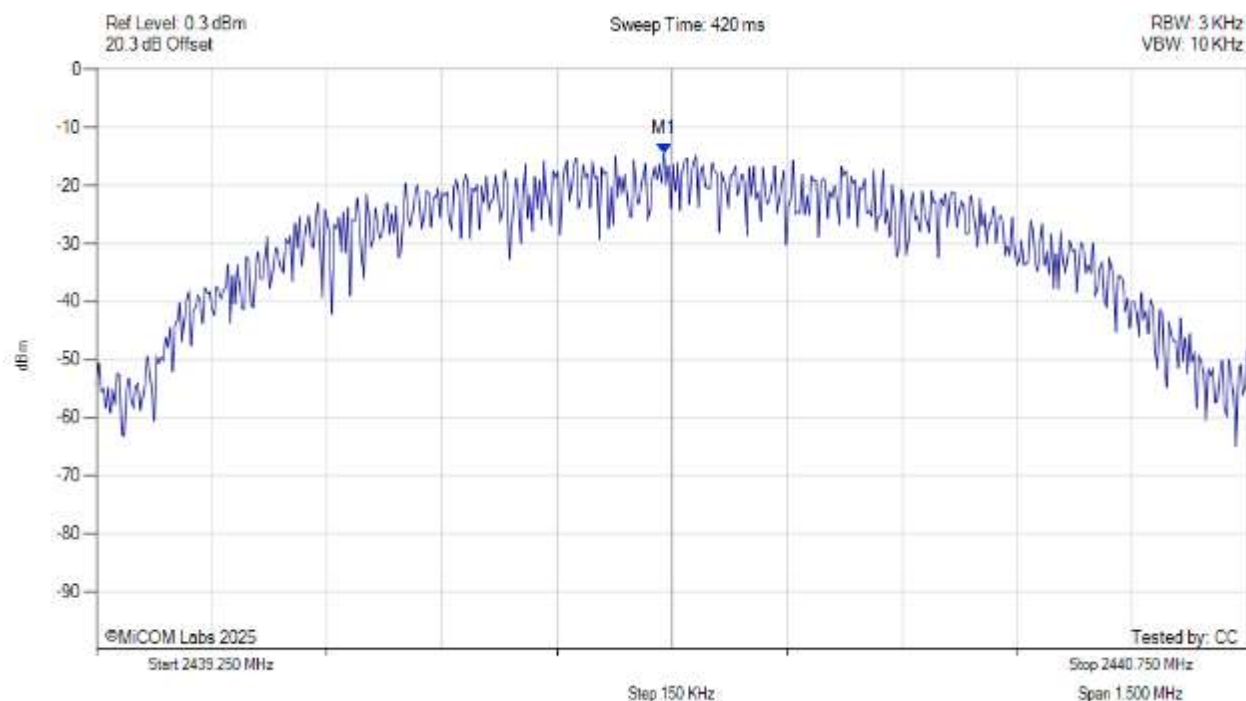


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2439.989 MHz : -14.480 dBm M1 : 2440.000 MHz : -14.480 dBm M1 + DCCF : 2440.000 MHz : -11.298 dBm Duty Cycle Correction Factor : +3.18 dB	Channel Frequency: 2440.00 MHz Limit: ≤ 8.0 dBm Margin: -19.3 dB

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: BLE-1M, Channel: 2480.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

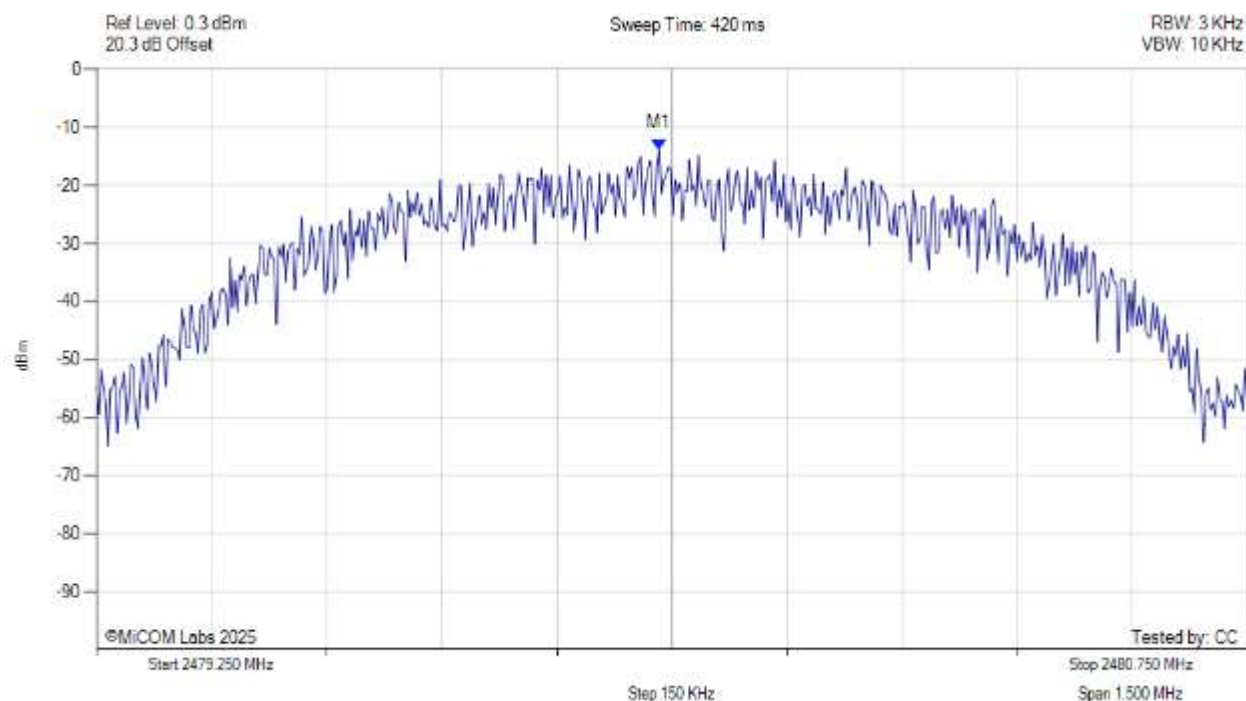


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2479.983 MHz : -13.669 dBm	Channel Frequency: 2480.00 MHz Limit: ≤ 8.000 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: BLE-1M, Channel: 2480.00 MHz, SUM, Temp: 20, Voltage: 3.3 Vdc

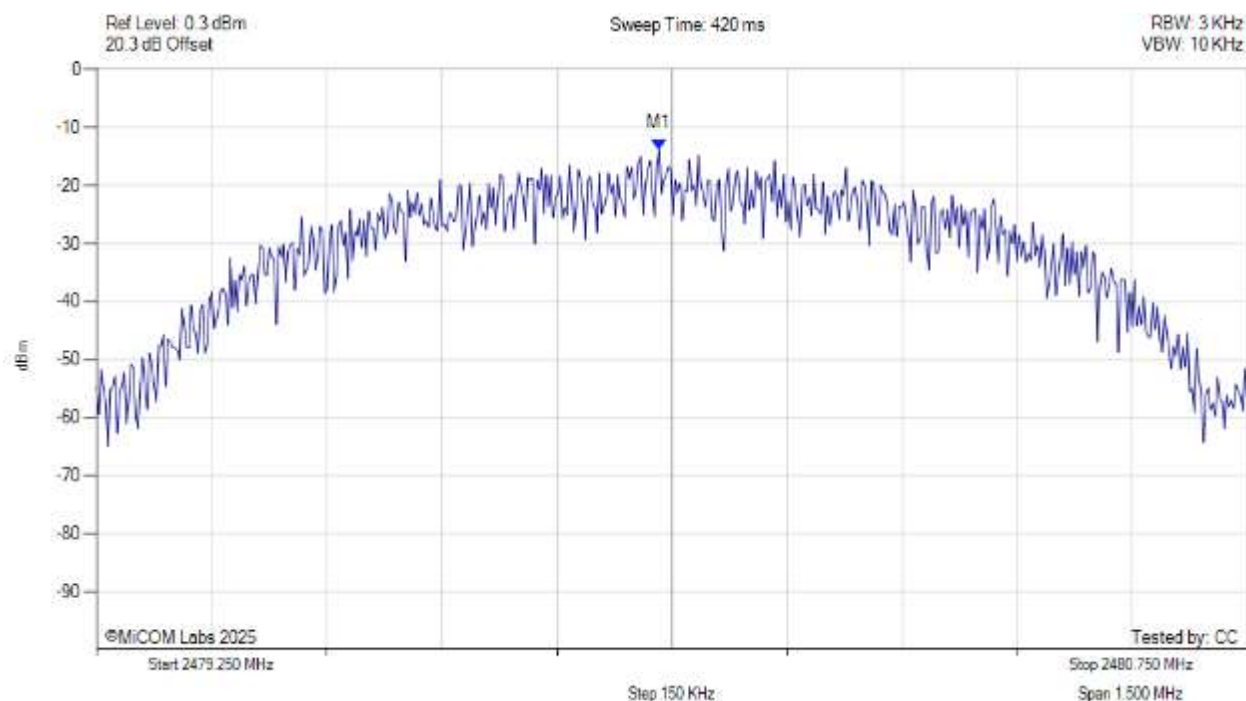


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2479.983 MHz : -13.669 dBm M1 : 2480.000 MHz : -13.669 dBm M1 + DCCF : 2480.000 MHz : -10.487 dBm Duty Cycle Correction Factor : +3.18 dB	Channel Frequency: 2480.00 MHz Limit: ≤ 8.0 dBm Margin: -18.5 dB

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: BLE-2M, Channel: 2404.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

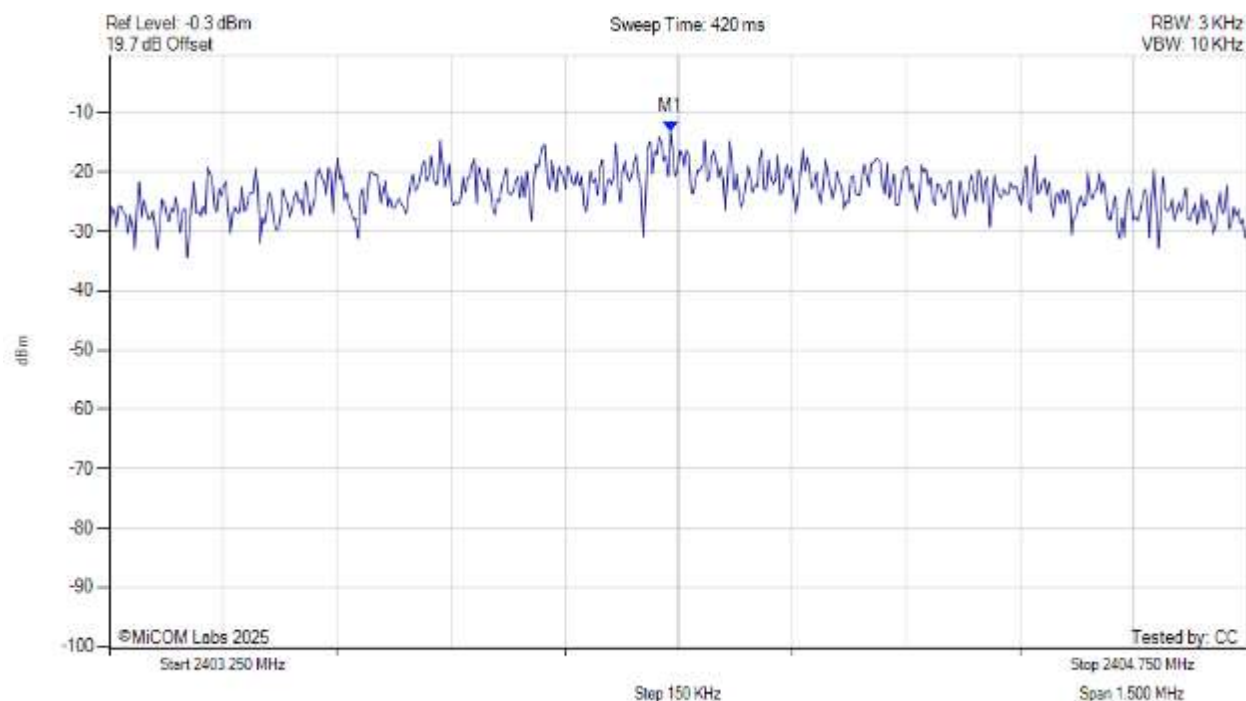


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2403.989 MHz : -13.085 dBm	Channel Frequency: 2404.00 MHz Limit: ≤ 8.000 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: BLE-2M, Channel: 2404.00 MHz, SUM, Temp: 20, Voltage: 3.3 Vdc

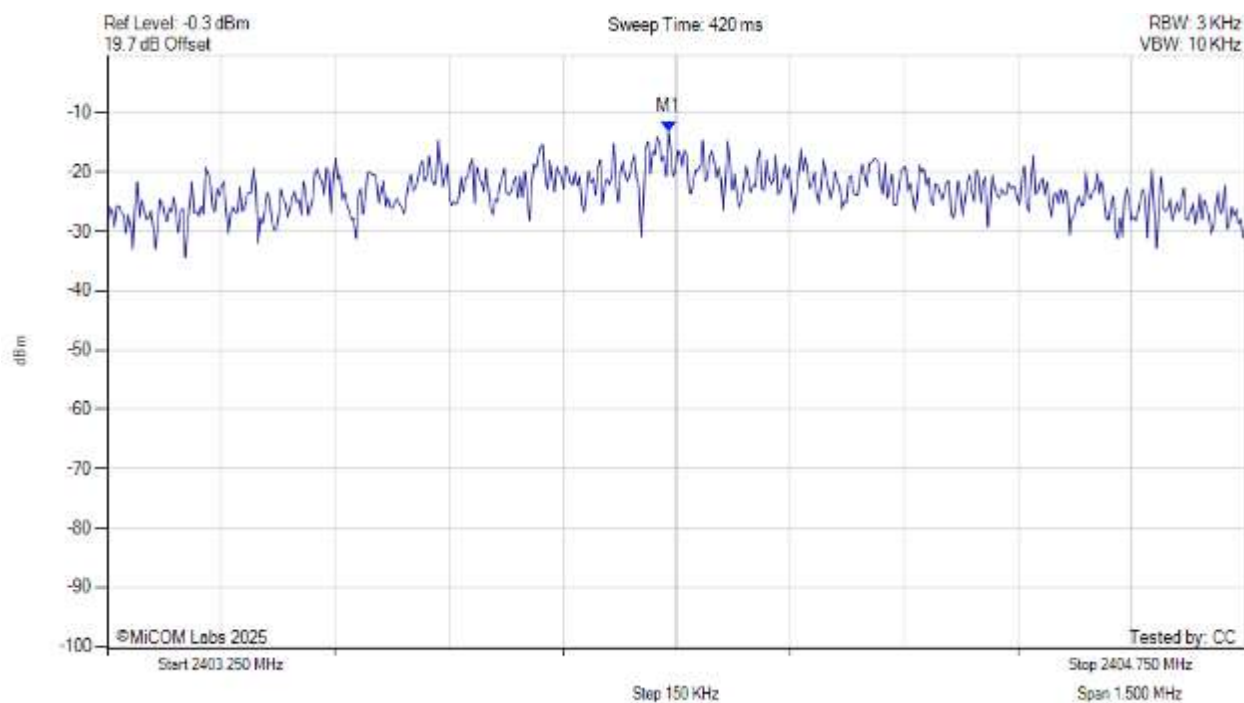


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2403.989 MHz : -13.085 dBm M1 : 2404.000 MHz : -13.085 dBm M1 + DCCF : 2404.000 MHz : -10.128 dBm Duty Cycle Correction Factor : +2.96 dB	Channel Frequency: 2404.00 MHz Limit: ≤ 8.0 dBm Margin: -18.1 dB

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: BLE-2M, Channel: 2440.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

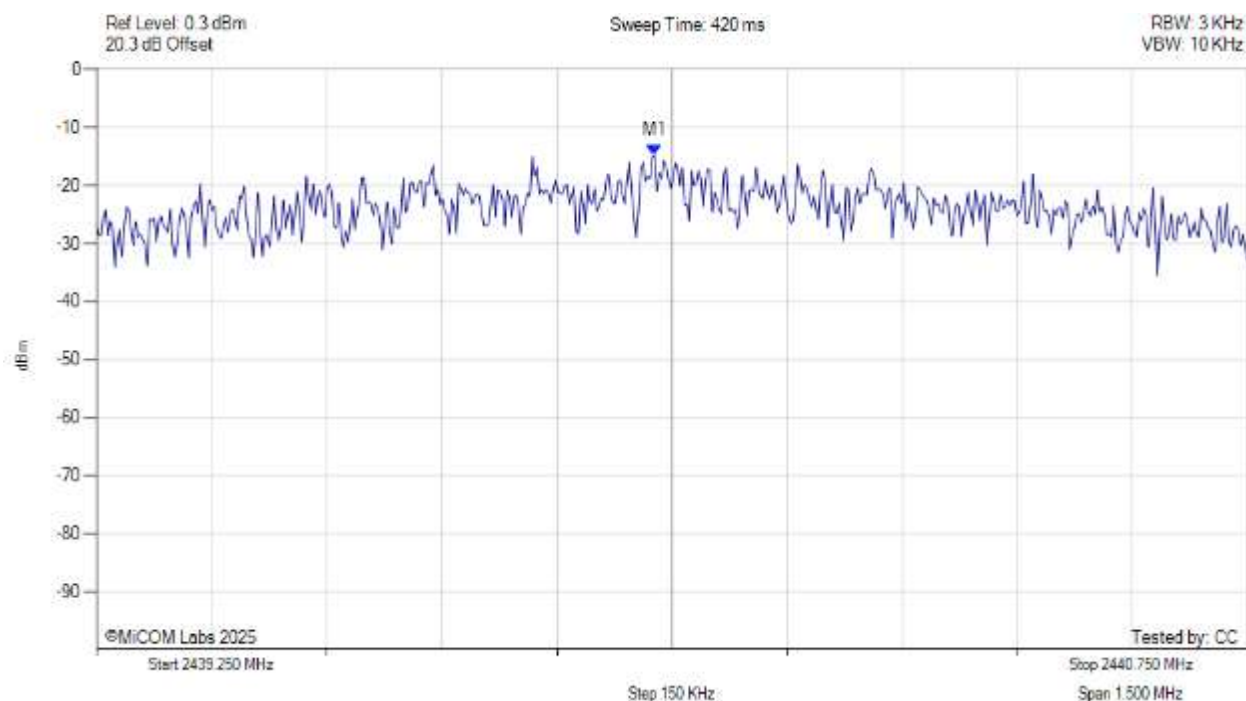


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2439.977 MHz : -14.735 dBm	Channel Frequency: 2440.00 MHz Limit: ≤ 8.000 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: BLE-2M, Channel: 2440.00 MHz, SUM, Temp: 20, Voltage: 3.3 Vdc

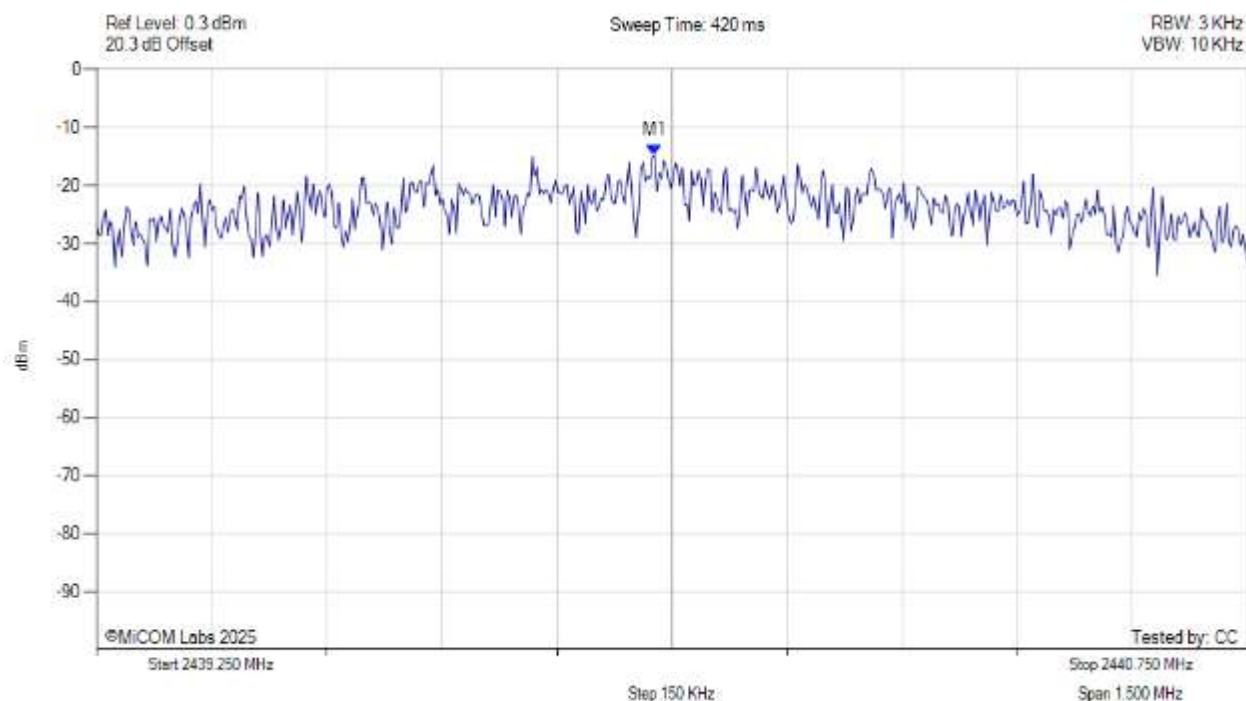


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2439.977 MHz : -14.735 dBm M1 : 2440.000 MHz : -14.735 dBm M1 + DCCF : 2440.000 MHz : -11.778 dBm Duty Cycle Correction Factor : +2.96 dB	Channel Frequency: 2440.00 MHz Limit: ≤ 8.0 dBm Margin: -19.8 dB

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: BLE-2M, Channel: 2478.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

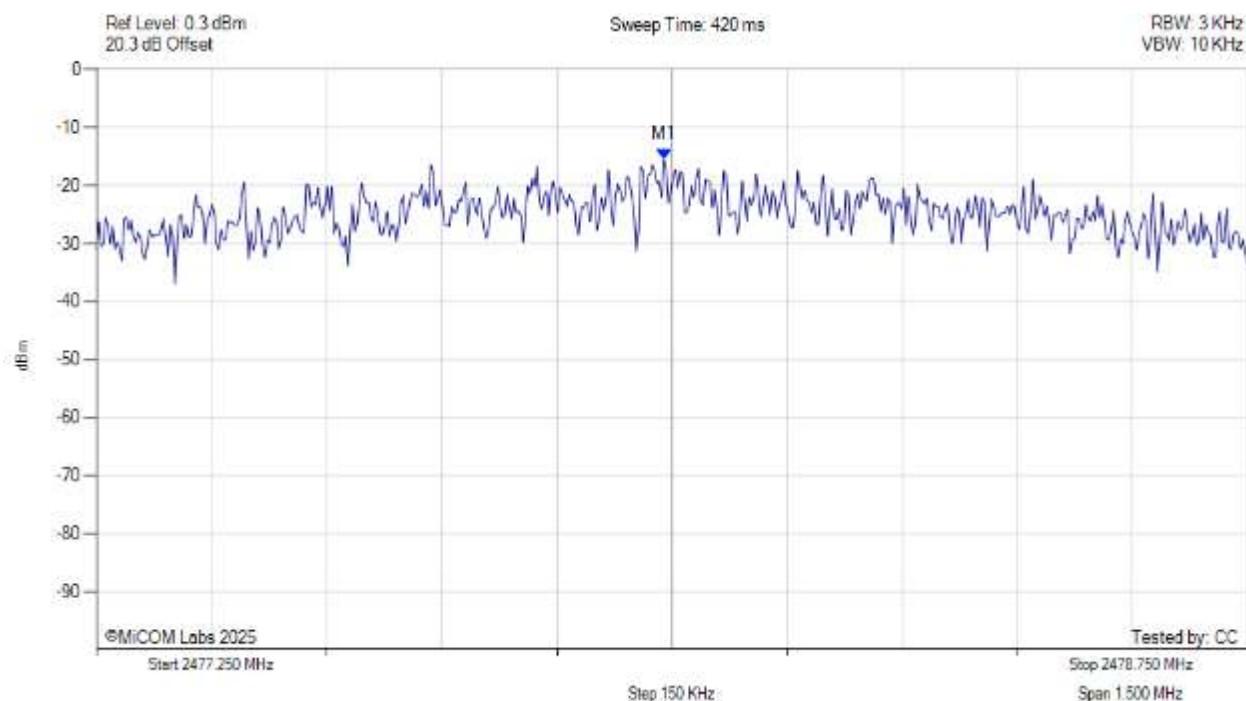


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2477.989 MHz : -15.520 dBm	Channel Frequency: 2478.00 MHz Limit: ≤ 8.000 dBm

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: BLE-2M, Channel: 2478.00 MHz, SUM, Temp: 20, Voltage: 3.3 Vdc

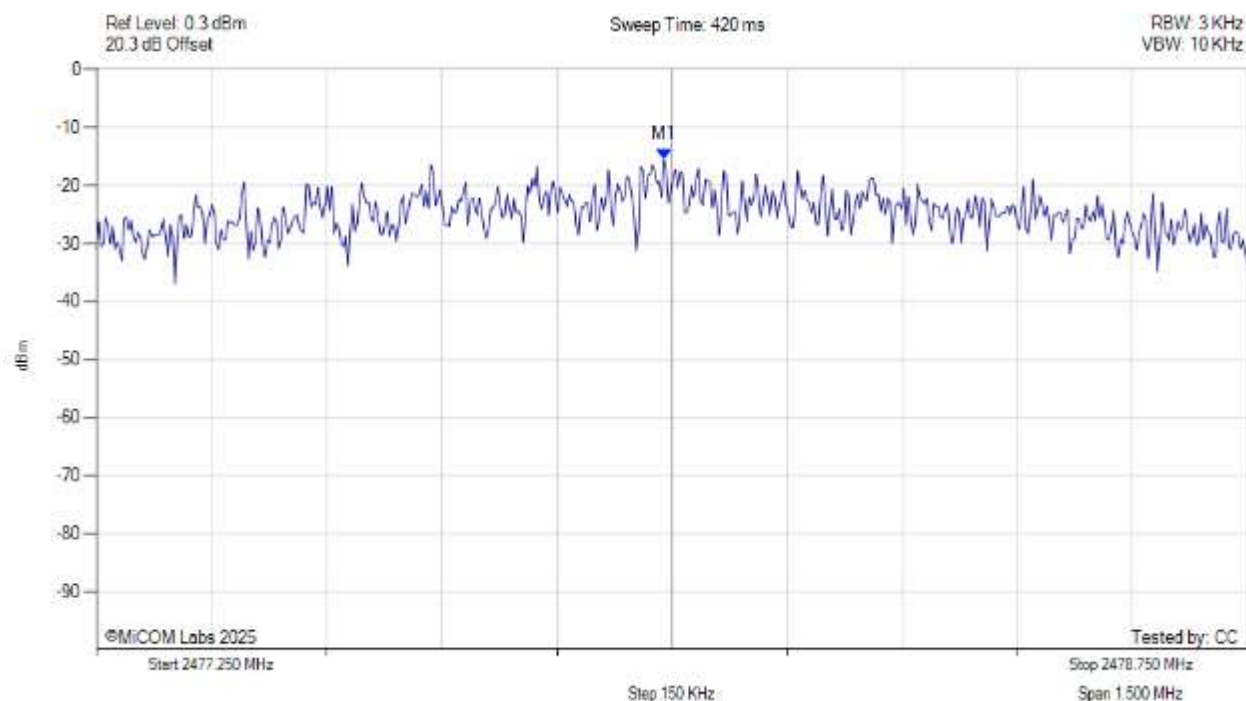

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2477.989 MHz : -15.520 dBm M1 : 2478.000 MHz : -15.520 dBm M1 + DCCF : 2478.000 MHz : -12.563 dBm Duty Cycle Correction Factor : +2.96 dB	Channel Frequency: 2478.00 MHz Limit: ≤ 8.0 dBm Margin: -20.6 dB

[back to matrix](#)

A.3. Emissions


A.3.1. Conducted Emissions

A.3.1.1. Conducted Spurious Emissions

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: BLE-1M, Channel: 2402.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

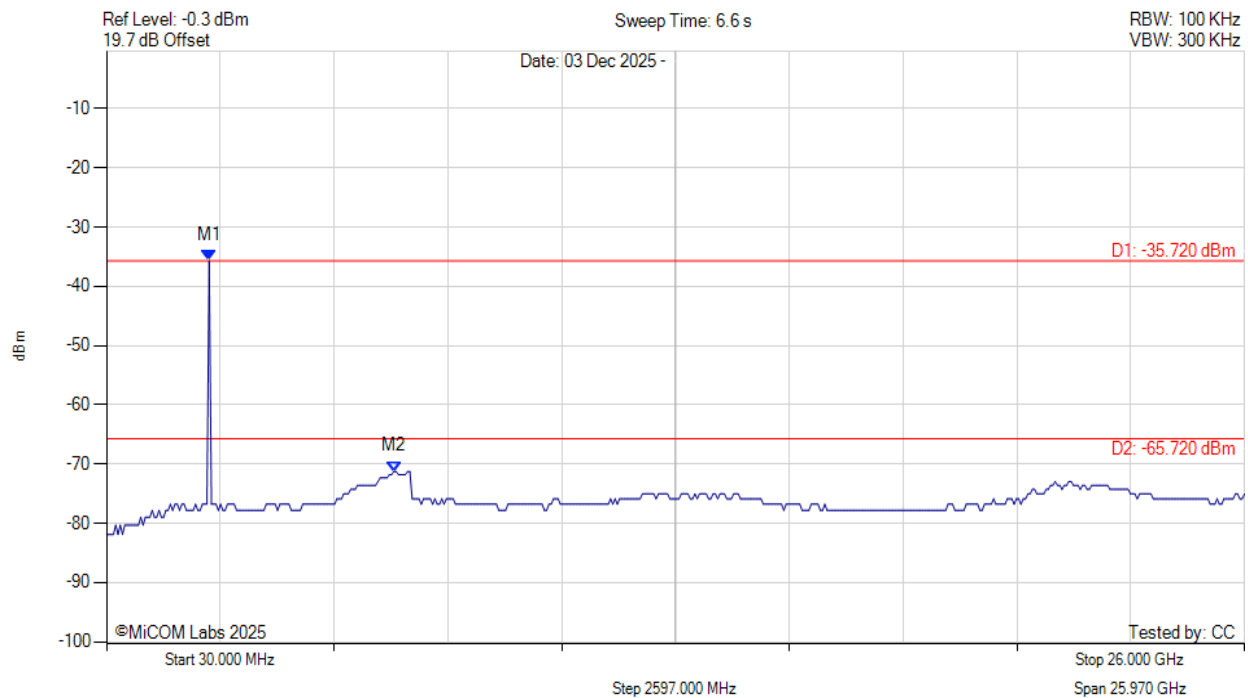


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 2371.984 MHz : -35.719 dBm M2 : 6587.555 MHz : -71.256 dBm	Channel Frequency: 2402.00 MHz Limit: -65.72 dBm Margin: -5.54 dB

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: BLE-1M, Channel: 2440.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

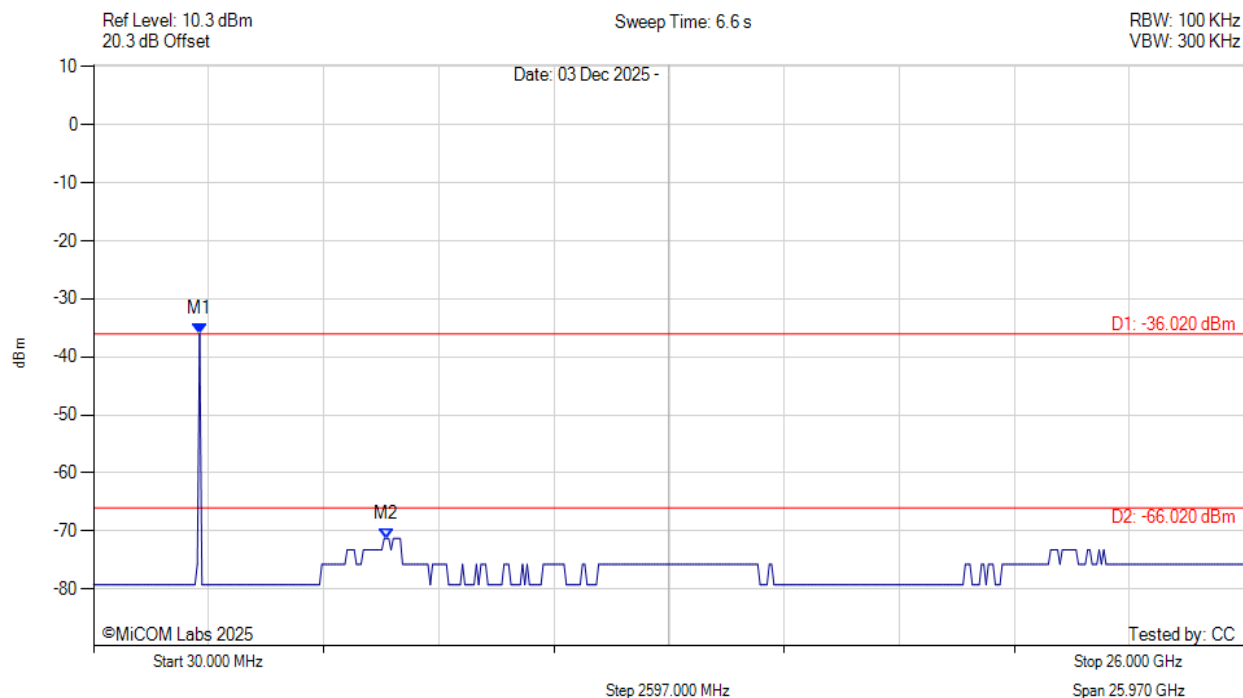


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 2424.028 MHz : -36.017 dBm M2 : 6639.599 MHz : -71.286 dBm	Channel Frequency: 2440.00 MHz Limit: -66.02 dBm Margin: -5.27 dB

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: BLE-1M, Channel: 2480.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

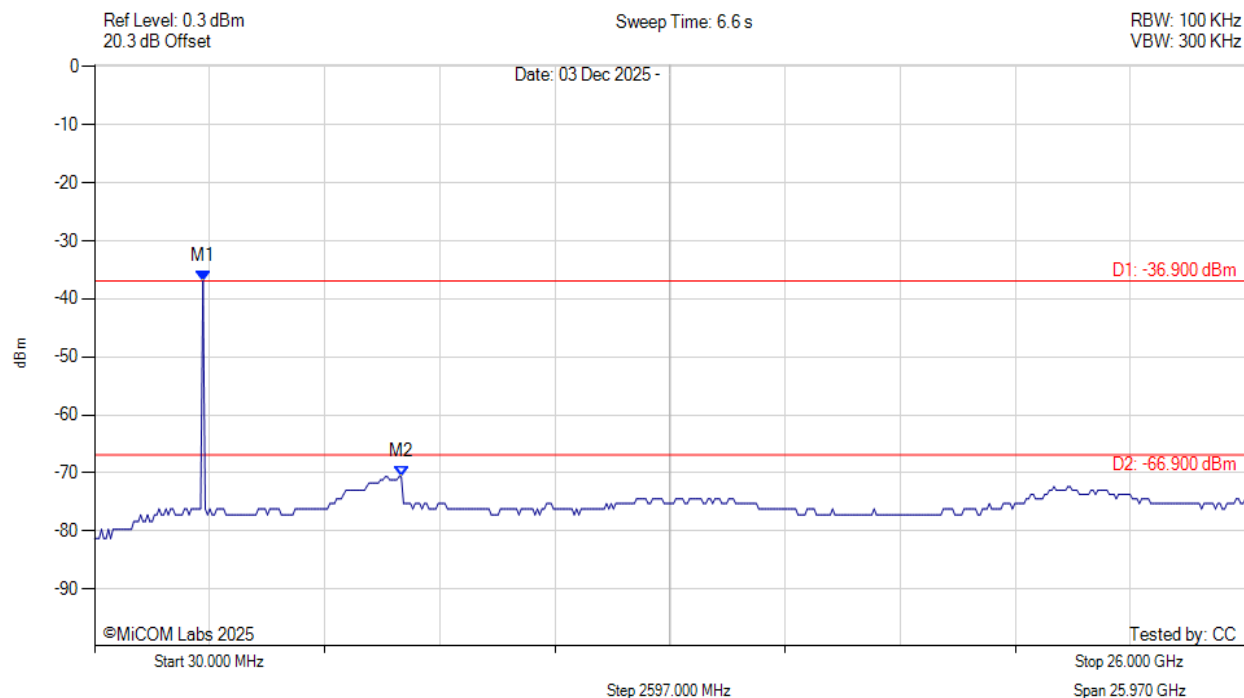


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 2476.072 MHz : -36.905 dBm M2 : 6951.864 MHz : -70.656 dBm	Channel Frequency: 2480.00 MHz Limit: -66.90 dBm Margin: -3.76 dB

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: BLE-2M, Channel: 2404.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

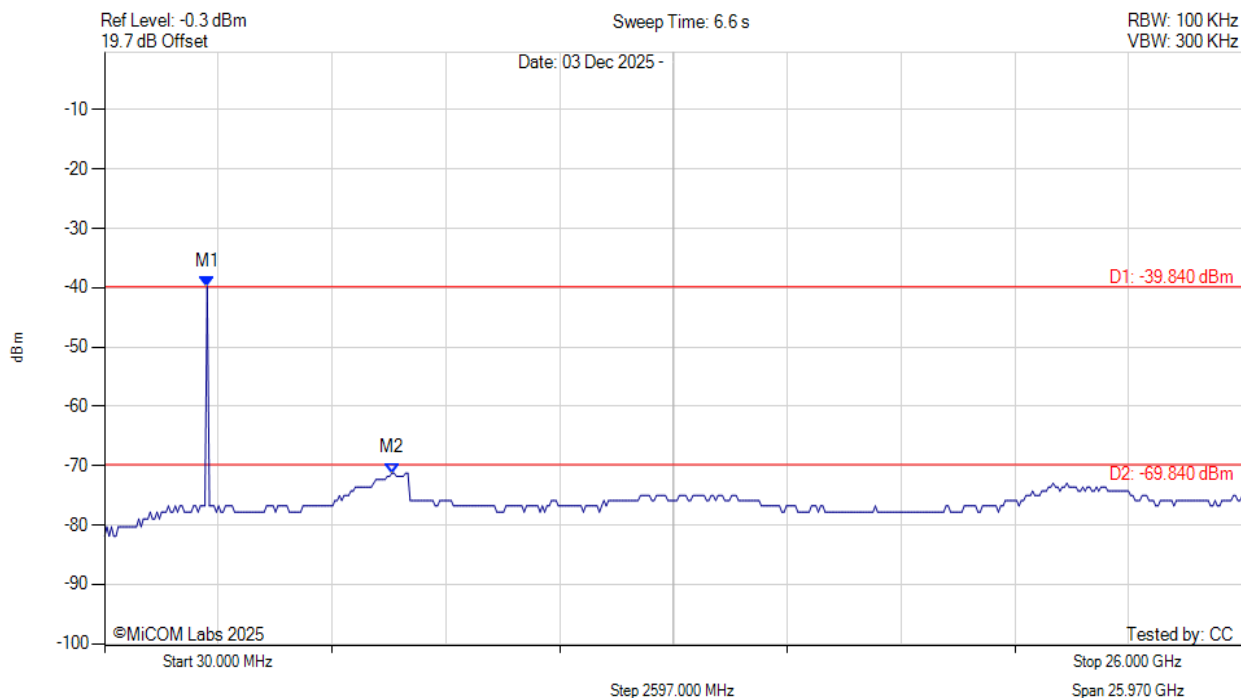


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 2371.984 MHz : -39.837 dBm M2 : 6587.555 MHz : -71.256 dBm	Channel Frequency: 2404.00 MHz Limit: -69.84 dBm Margin: -1.42 dB

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: BLE-2M, Channel: 2440.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

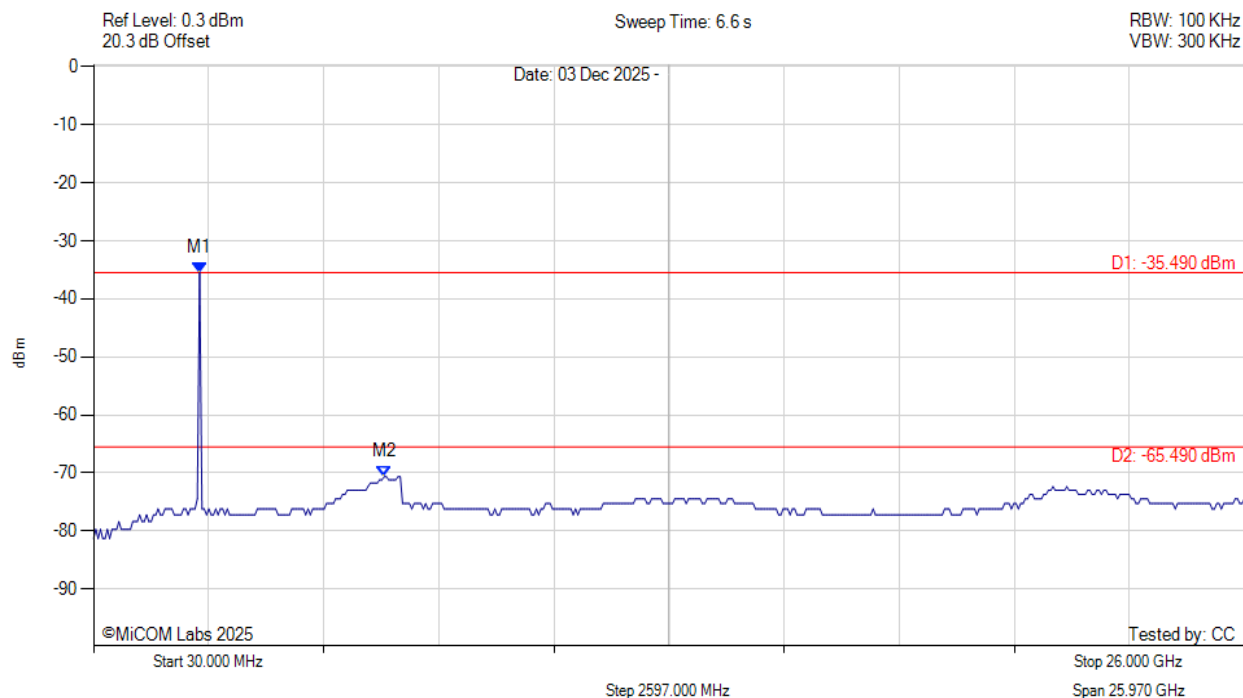


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = CLR/WRITE	M1 : 2424.028 MHz : -35.485 dBm M2 : 6587.555 MHz : -70.656 dBm	Channel Frequency: 2440.00 MHz Limit: -65.49 dBm Margin: -5.17 dB

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: BLE-2M, Channel: 2478.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

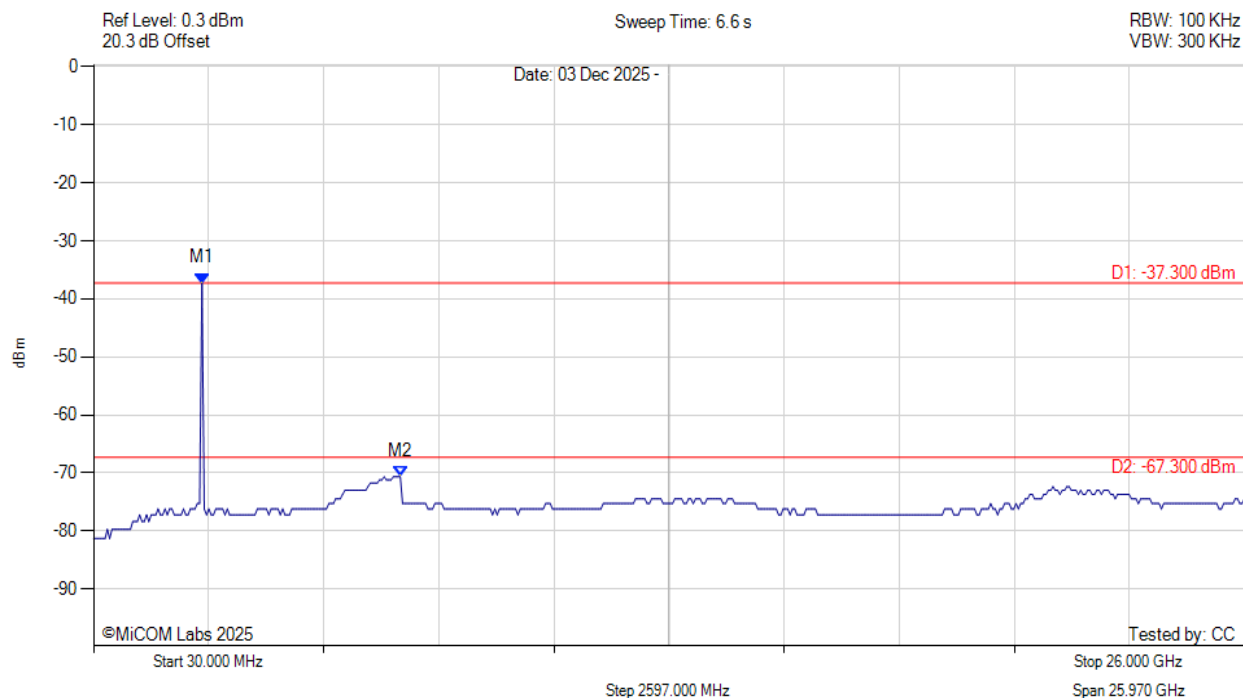

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 0 Trace Mode = VIEW	M1 : 2476.072 MHz : -37.313 dBm M2 : 6951.864 MHz : -70.656 dBm	Channel Frequency: 2478.00 MHz Limit: -67.30 dBm Margin: -3.36 dB


[back to matrix](#)

A.3.1.2. Conducted Band-Edge Emissions



CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE

Variant: BLE-1M, Channel: 2402.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

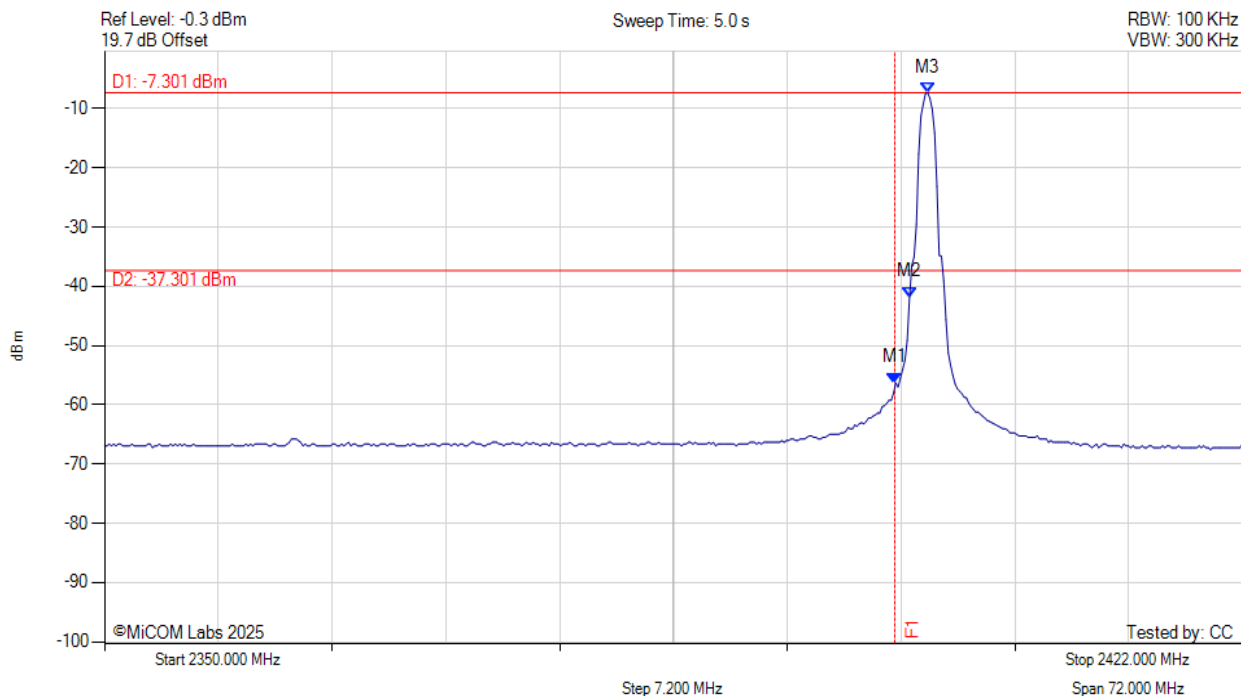


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2400.000 MHz : -56.311 dBm M2 : 2400.934 MHz : -41.817 dBm M3 : 2402.088 MHz : -7.301 dBm	Channel Frequency: 2402.00 MHz

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE



Variant: BLE-2M, Channel: 2404.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

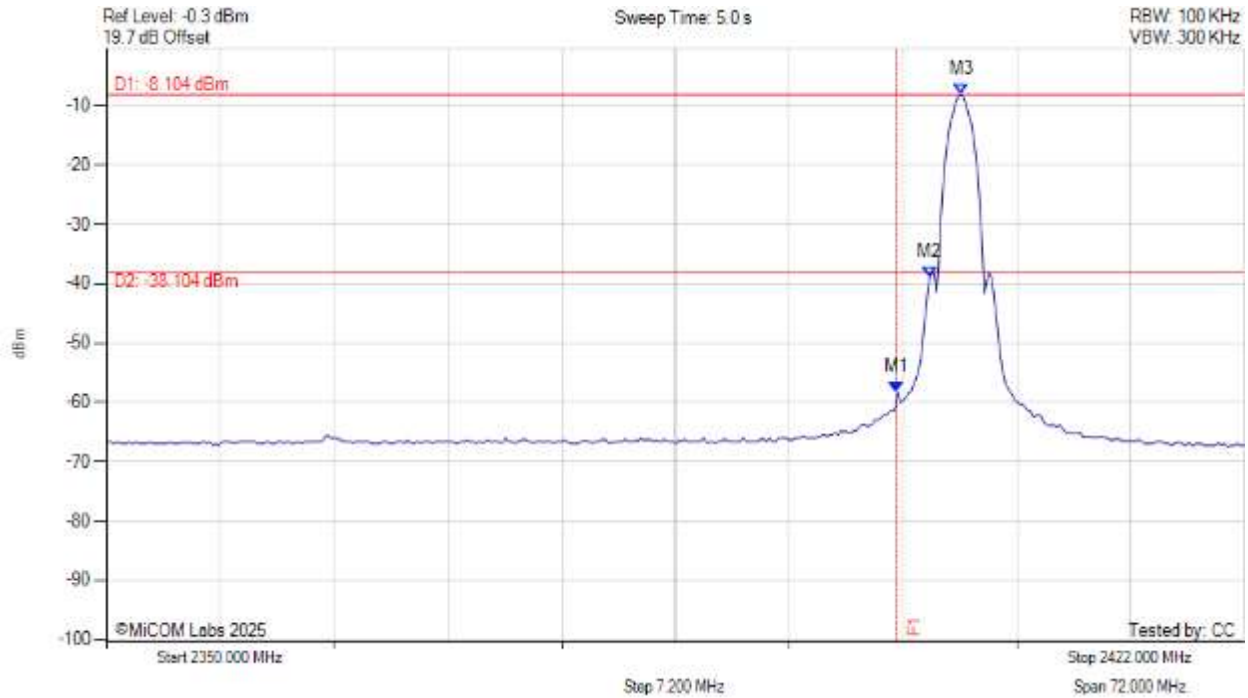


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2400.000 MHz : -58.364 dBm M2 : 2402.088 MHz : -38.976 dBm M3 : 2404.108 MHz : -8.104 dBm	Channel Frequency: 2404.00 MHz

[back to matrix](#)

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: BLE-1M, Channel: 2480.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

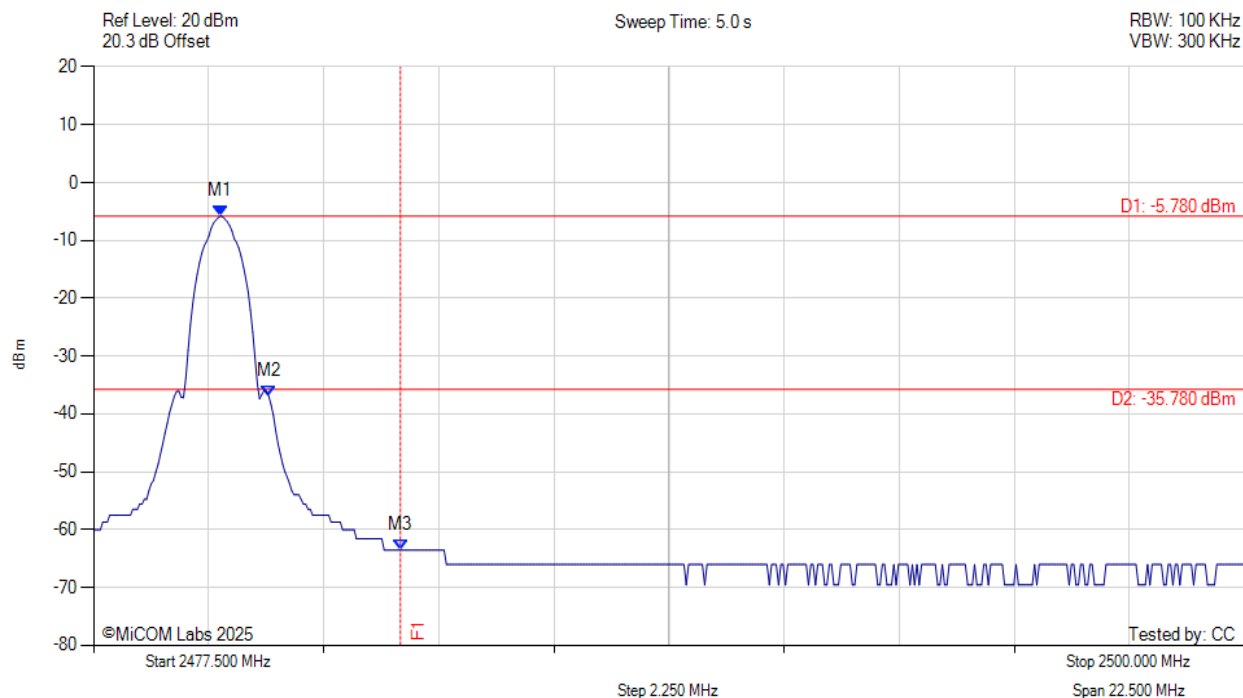


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2479.980 MHz : -5.783 dBm M2 : 2480.927 MHz : -36.977 dBm M3 : 2483.500 MHz : -63.524 dBm	Channel Frequency: 2480.00 MHz

[back to matrix](#)

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: BLE-2M, Channel: 2478.00 MHz, Chain a, Temp: 20, Voltage: 3.3 Vdc

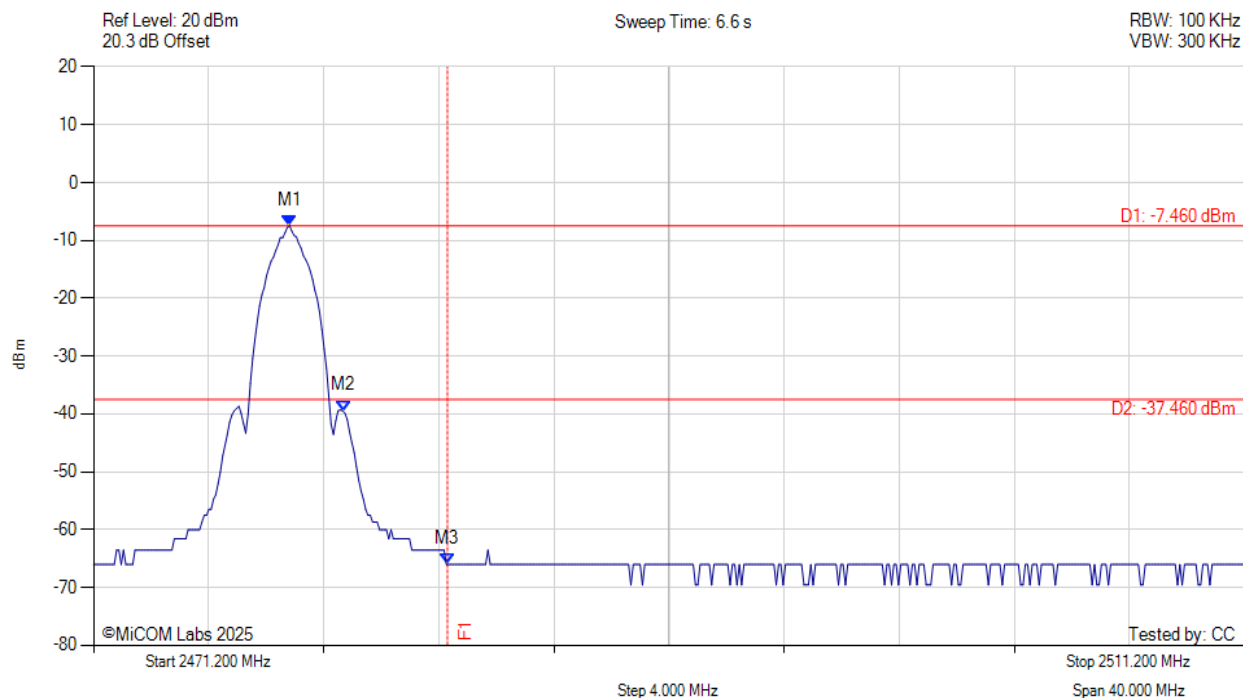

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = CLR/WRITE	M1 : 2478.014 MHz : -7.462 dBm M2 : 2479.884 MHz : -39.442 dBm M3 : 2483.500 MHz : -66.023 dBm	Channel Frequency: 2478.00 MHz


[back to matrix](#)

A.3.2. Radiated Emissions

A.4.2.1 Bent Metal Antenna / Abracon PRO-OB-440 (on Digi board)



FCC Spurious Emissions 1-18 GHz

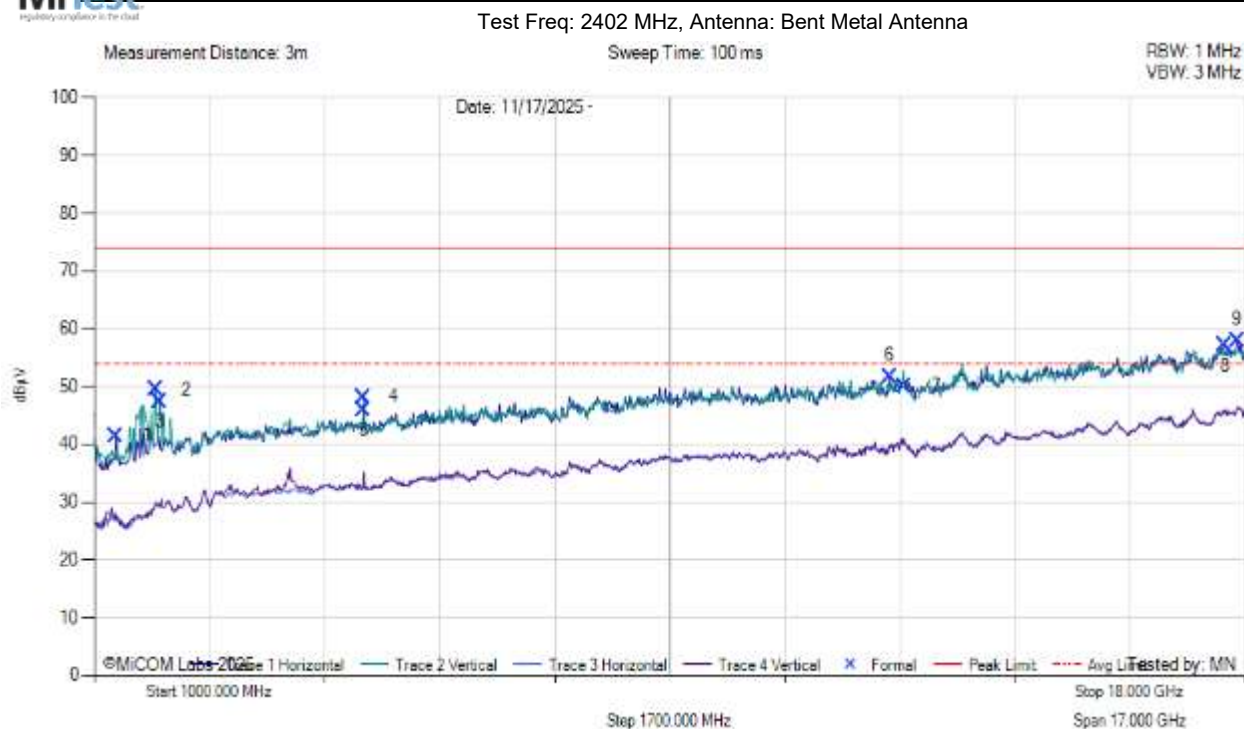

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1323.00	55.38	2.33	-16.21	41.49	MaxP	Horizontal	199	300	74.0	-32.5	Pass
2	1901.00	60.64	2.68	-13.86	49.46	MaxP	Vertical	199	209	74.0	-24.5	Pass
3	1969.00	58.26	2.74	-13.54	47.46	MaxP	Vertical	199	119	74.0	-26.5	Pass
4	4978.00	56.97	3.90	-12.65	48.22	MaxP	Vertical	199	240	74.0	-25.8	Pass
5	4978.00	54.75	3.90	-12.65	45.99	MaxP	Horizontal	150	30	74.0	-28.0	Pass
6	12747.00	53.65	6.16	-8.04	51.77	MaxP	Horizontal	199	0	74.0	-22.2	Pass
7	12968.00	51.22	6.52	-7.63	50.10	MaxP	Vertical	199	330	74.0	-23.9	Pass
8	17694.00	49.23	7.82	0.17	57.22	MaxP	Vertical	150	59	74.0	-16.8	Pass
9	17881.00	48.46	8.07	1.46	57.99	MaxP	Horizontal	150	270	74.0	-16.0	Pass

Test Notes: Bent metal antenna. 2402 MHz 3.3V PS, PS and laptop are on the table. Ceramic antenna used

[back to matrix](#)



FCC Spurious Emissions 1-18 GHz

Test Freq: 2440 MHz, Antenna: Bent Metal Antenna



1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1731.00	62.88	2.59	-15.33	50.14	MaxP	Vertical	199	149	74.0	-23.9	Pass
2	1969.00	59.16	2.74	-13.54	48.36	MaxP	Vertical	199	179	74.0	-25.6	Pass
3	4978.00	56.06	3.90	-12.65	47.31	MaxP	Vertical	199	239	74.0	-26.7	Pass
4	8395.00	51.34	5.22	-7.98	48.59	MaxP	Horizontal	150	330	74.0	-25.4	Pass
5	12611.00	52.50	6.43	-7.36	51.57	MaxP	Horizontal	199	180	74.0	-22.4	Pass
6	12951.00	52.66	6.52	-7.68	51.49	MaxP	Vertical	150	179	74.0	-22.5	Pass
7	17745.00	48.27	8.06	0.56	56.89	MaxP	Vertical	150	119	74.0	-17.1	Pass
8	17881.00	47.61	8.07	1.46	57.14	MaxP	Horizontal	199	240	74.0	-16.9	Pass


Test Notes: Bent metal antenna. 2440 MHz 3.3V PS, PS and laptop are on the table. Ceramic antenna used

[back to matrix](#)



FCC Spurious Emissions 1-18 GHz

Test Freq: 2480 MHz, Antenna: Bent Metal Antenna

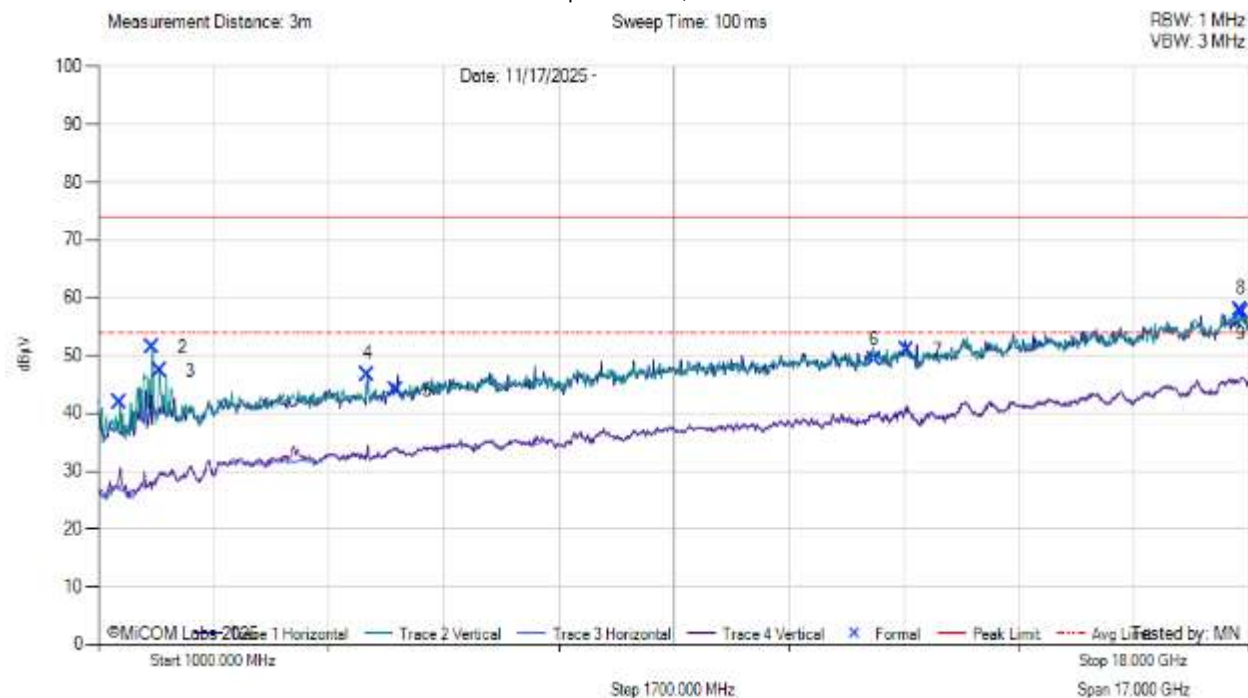

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1323.00	55.79	2.33	-16.21	41.91	MaxP	Vertical	150	119	74.0	-32.1	Pass
2	1799.00	63.40	2.65	-14.67	51.38	MaxP	Vertical	199	269	74.0	-22.6	Pass
3	1901.00	58.51	2.68	-13.86	47.33	MaxP	Vertical	199	179	74.0	-26.7	Pass
4	4978.00	55.53	3.90	-12.65	46.78	MaxP	Horizontal	199	60	74.0	-27.2	Pass
5	5403.00	51.03	4.29	-11.35	43.96	MaxP	Horizontal	150	60	74.0	-30.0	Pass
6	12458.00	49.47	5.88	-6.07	49.28	MaxP	Vertical	199	210	74.0	-24.7	Pass
7	12934.00	52.28	6.33	-7.73	50.89	MaxP	Horizontal	199	150	74.0	-23.1	Pass
8	17864.00	48.96	7.77	1.31	58.05	MaxP	Horizontal	150	90	74.0	-16.0	Pass
9	17881.00	47.92	8.07	1.46	57.45	MaxP	Vertical	150	0	74.0	-16.5	Pass

Test Notes: Bent metal antenna. 2480 MHz 3.3V PS, PS and laptop are on the table. Bent Metal antenna used

[back to matrix](#)

A.4.2.2 Dipole / Digi A24-HASM-450



FCC Spurious Emissions 1-18 GHz

Test Freq: 2402 MHz, Antenna: Dipole A-24-HASM-450



1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1731.00	60.04	2.59	-15.33	47.30	MaxP	Vertical	199	150	74.0	-26.7	Pass
2	1918.00	61.39	2.67	-13.81	50.24	MaxP	Vertical	150	179	74.0	-23.8	Pass
3	2394.00	54.24	3.02	-12.11	45.15	MaxP	Vertical	150	179	74.0	-28.9	Pass
4	4791.00	56.83	3.84	-12.31	48.35	MaxP	Horizontal	150	300	74.0	-25.6	Pass
5	4978.00	56.57	3.90	-12.65	47.82	MaxP	Vertical	199	89	74.0	-26.2	Pass
6	7205.00	54.12	4.52	-7.46	51.17	MaxP	Vertical	150	239	74.0	-22.8	Pass
7	9041.00	51.42	5.35	-7.08	49.68	MaxP	Vertical	150	29	74.0	-24.3	Pass
8	9908.00	49.85	5.71	-5.67	49.89	MaxP	Horizontal	199	300	74.0	-24.1	Pass
9	17898.00	47.52	7.94	1.36	56.82	MaxP	Horizontal	199	60	74.0	-17.2	Pass
10	17949.00	48.30	8.05	0.80	57.15	MaxP	Vertical	199	29	74.0	-16.8	Pass


Test Notes: Dipole A-24-HASM-450. 2402 MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

[back to matrix](#)



FCC Spurious Emissions 1-18 GHz

Test Freq: 2440 MHz, Antenna: Dipole A-24-HASM-450

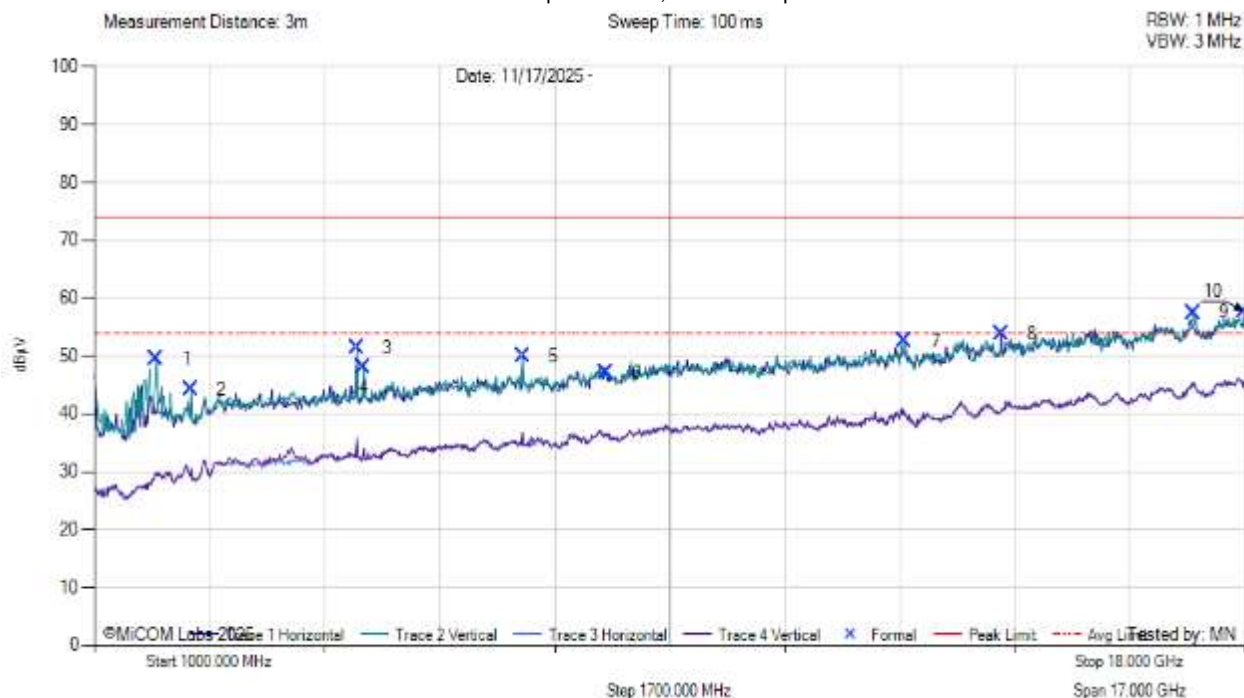


1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1918.00	60.66	2.67	-13.81	49.52	MaxP	Vertical	150	179	74.0	-24.5	Pass
2	2428.00	53.08	3.04	-11.89	44.23	MaxP	Vertical	150	29	74.0	-29.8	Pass
3	4876.00	59.96	3.92	-12.48	51.40	MaxP	Horizontal	150	300	74.0	-22.6	Pass
4	4978.00	56.77	3.90	-12.65	48.02	MaxP	Vertical	199	209	74.0	-26.0	Pass
5	7324.00	52.94	4.56	-7.45	50.05	MaxP	Vertical	150	0	74.0	-23.9	Pass
6	8548.00	49.96	5.15	-7.97	47.14	MaxP	Horizontal	199	300	74.0	-26.9	Pass
7	12968.00	53.67	6.52	-7.63	52.56	MaxP	Vertical	199	29	74.0	-21.4	Pass
8	14396.00	53.34	6.72	-6.28	53.77	MaxP	Horizontal	150	240	74.0	-20.2	Pass
9	17235.00	49.65	7.56	0.35	57.55	MaxP	Vertical	150	269	74.0	-16.5	Pass
10	17983.00	49.33	7.74	0.62	57.70	MaxP	Horizontal	199	90	74.0	-16.3	Pass

Test Notes: Dipole A-24-HASM-450. 2440 MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

[back to matrix](#)

Test Freq: 2480 MHz, Antenna: Dipole A-24-HASM-450

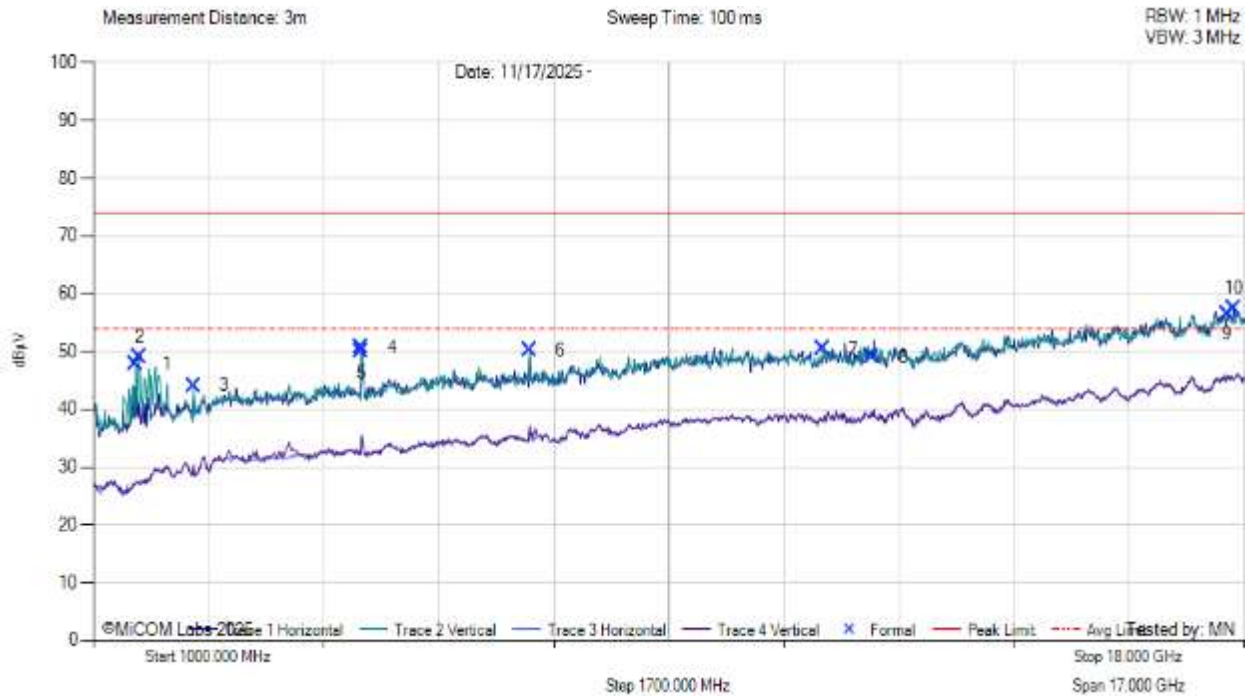


1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1629.00	61.66	2.49	-16.33	47.81	MaxP	Vertical	150	149	74.0	-26.2	Pass
2	1680.00	62.28	2.55	-15.85	48.98	MaxP	Vertical	199	119	74.0	-25.0	Pass
3	2479.00	52.76	3.06	-11.72	44.10	MaxP	Vertical	199	90	74.0	-29.9	Pass
4	4961.00	59.47	3.90	-12.71	50.66	MaxP	Horizontal	150	330	74.0	-23.3	Pass
5	4961.00	58.8	3.90	-12.71	49.99	MaxP	Vertical	150	330	74.0	-24.0	Pass
6	7443.00	53.17	4.62	-7.60	50.19	MaxP	Vertical	150	0	74.0	-23.8	Pass
7	11778.00	50.70	5.45	-5.64	50.52	MaxP	Vertical	150	270	74.0	-23.5	Pass
8	12509.00	49.91	5.63	-6.50	49.04	MaxP	Horizontal	199	0	74.0	-25.0	Pass
9	17745.00	47.96	8.06	0.56	56.58	MaxP	Vertical	199	29	74.0	-17.4	Pass
10	17847.00	48.51	7.67	1.27	57.46	MaxP	Horizontal	150	210	74.0	-16.5	Pass

Test Notes: Dipole A-24-HASM-450. 2480 MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

[back to matrix](#)

A.4.2.3 Omni / L-com HG2415U-PRO Antenna


FCC Spurious Emissions 1-18 GHz

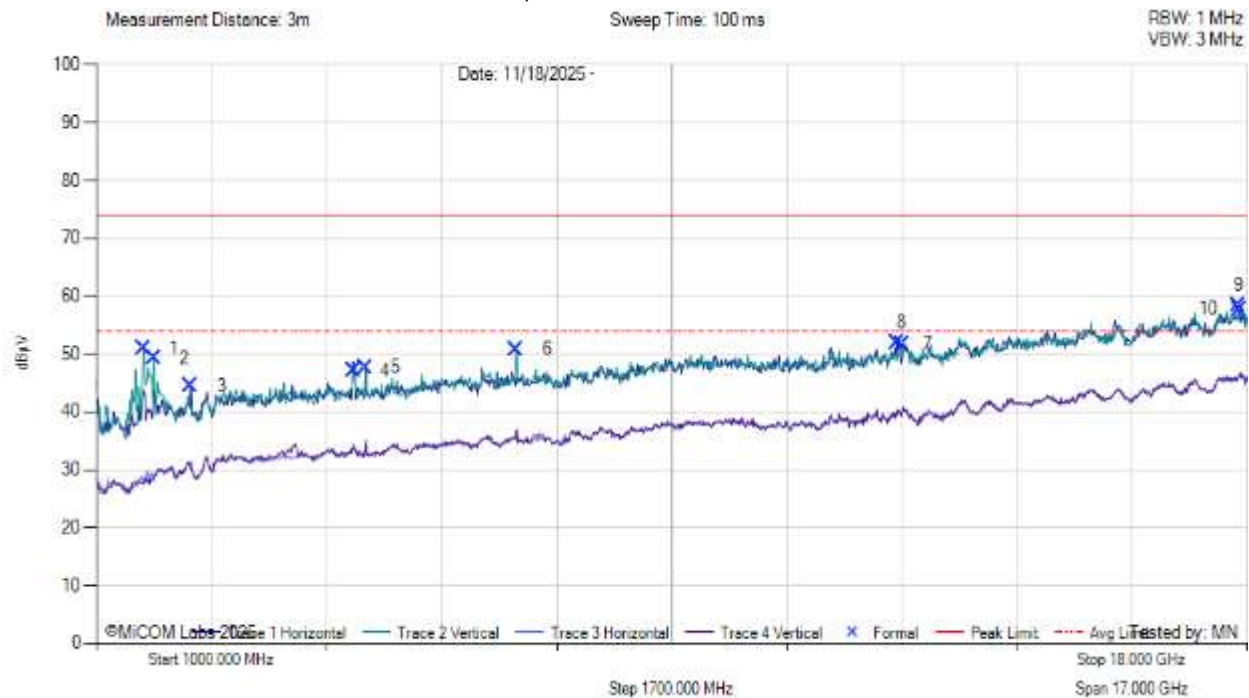

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1697.00	64.23	2.52	-15.76	50.99	MaxP	Vertical	199	119	74.0	-23.0	Pass
2	1850.00	60.97	2.66	-14.40	49.23	MaxP	Vertical	150	270	74.0	-24.8	Pass
3	2394.00	53.63	3.02	-12.11	44.54	MaxP	Horizontal	150	270	74.0	-29.5	Pass
4	4808.00	--	--	--	47.07	MaxP	--	--	--	74.0	-26.9	--
5	4978.00	56.43	3.90	-12.65	47.68	MaxP	Horizontal	150	60	74.0	-26.3	Pass
6	7205.00	53.77	4.52	-7.46	50.82	MaxP	Vertical	150	90	74.0	-23.2	Pass
7	12832.00	53.81	6.49	-8.33	51.97	MaxP	Horizontal	150	180	74.0	-22.0	Pass
8	12900.00	53.42	6.51	-8.16	51.77	MaxP	Vertical	150	299	74.0	-22.2	Pass
9	17864.00	49.24	7.77	1.31	58.33	MaxP	Vertical	199	90	74.0	-15.7	Pass
10	17881.00	48.26	8.07	1.46	57.79	MaxP	Horizontal	199	120	74.0	-16.2	Pass

Test Notes: Omni L-com HG2415U-PRO antenna used. 2402 MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

[back to matrix](#)

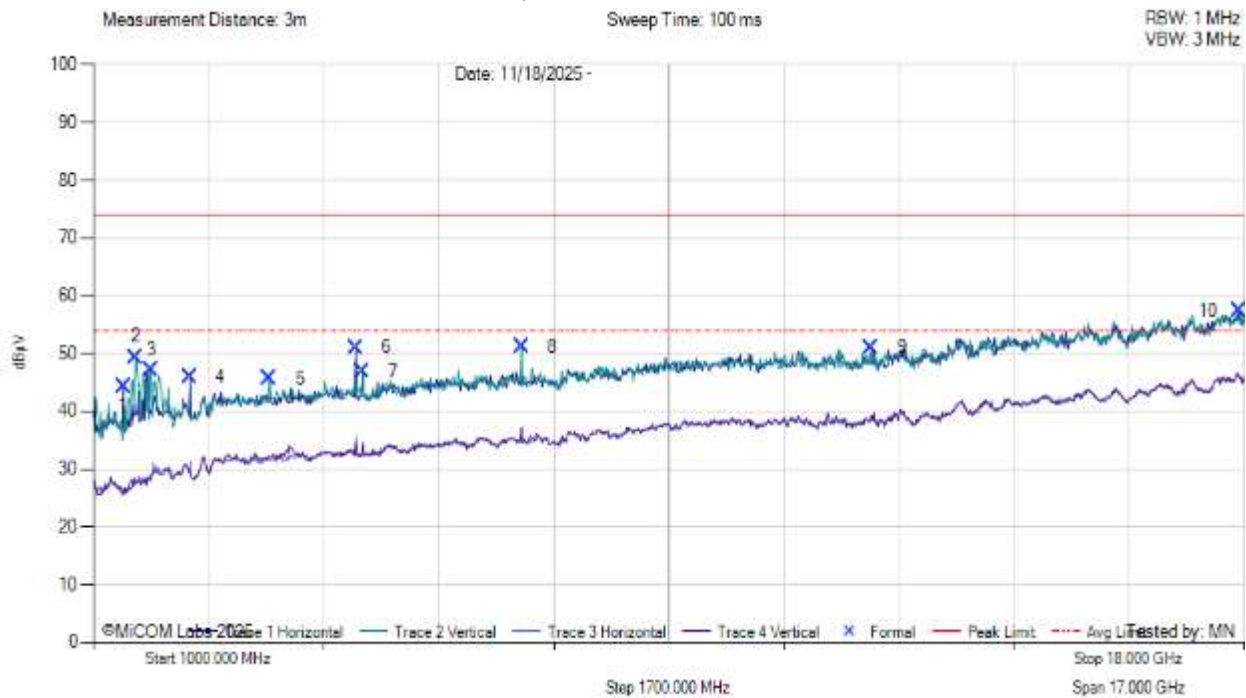

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1442.00	58.84	2.37	-16.88	44.33	MaxP	Horizontal	199	240	74.0	-29.7	Pass
2	1629.00	63.25	2.49	-16.33	49.40	MaxP	Vertical	199	149	74.0	-24.6	Pass
3	1850.00	58.86	2.66	-14.40	47.12	MaxP	Vertical	199	269	74.0	-26.9	Pass
4	2428.00	54.82	3.04	-11.89	45.97	MaxP	Horizontal	150	270	74.0	-28.0	Pass
5	3601.00	54.19	3.33	-11.85	45.67	MaxP	Vertical	199	209	74.0	-28.3	Pass
6	4876.00	59.61	3.92	-12.48	51.05	MaxP	Horizontal	150	180	74.0	-22.9	Pass
7	4978.00	55.62	3.90	-12.65	46.87	MaxP	Vertical	199	89	74.0	-27.1	Pass
8	7324.00	54.14	4.56	-7.45	51.25	MaxP	Vertical	150	29	74.0	-22.7	Pass
9	12492.00	51.48	6.01	-6.42	51.08	MaxP	Vertical	199	330	74.0	-22.9	Pass
10	17915.00	48.38	7.75	1.20	57.34	MaxP	Horizontal	199	90	74.0	-16.7	Pass


Test Notes: Omni L-com HG2415U-PRO antenna used. 2440 MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

[back to matrix](#)



FCC Spurious Emissions 1-18 GHz

Test Freq: 2480 MHz, Antenna: Omni L-com HG2415U-PRO

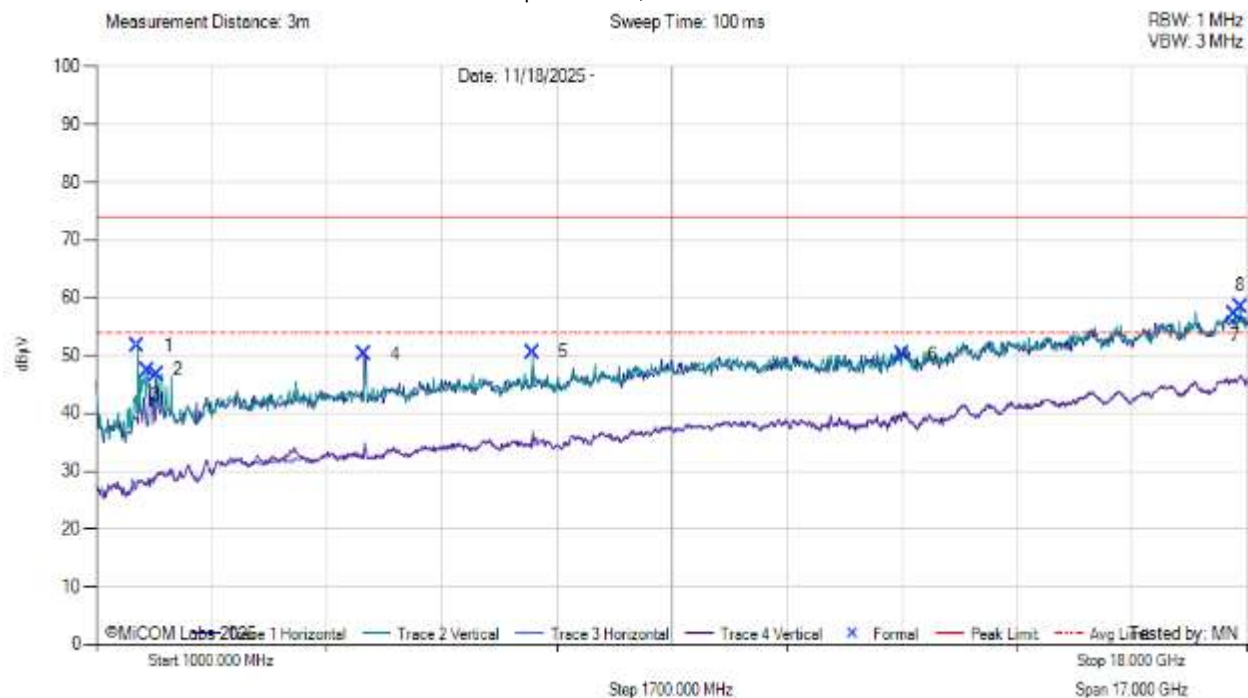


1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1612.00	65.61	2.49	-16.39	51.71	MaxP	Vertical	199	269	74.0	-22.3	Pass
2	1748.00	59.98	2.58	-15.10	47.46	MaxP	Vertical	199	149	74.0	-26.5	Pass
3	1884.00	58.18	2.64	-14.08	46.74	MaxP	Horizontal	150	240	74.0	-27.3	Pass
4	4961.00	58.97	3.90	-12.71	50.16	MaxP	Horizontal	150	180	74.0	-23.8	Pass
5	7443.00	53.58	4.62	-7.60	50.60	MaxP	Vertical	150	90	74.0	-23.4	Pass
6	12900.00	51.83	6.51	-8.16	50.18	MaxP	Vertical	150	330	74.0	-23.8	Pass
7	17813.00	48.10	7.83	1.19	57.11	MaxP	Horizontal	150	240	74.0	-16.9	Pass
8	17898.00	49.21	7.94	1.36	58.51	MaxP	Vertical	150	90	74.0	-15.5	Pass

Test Notes: Omni L-com HG2415U-PRO antenna used. 2480 MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

[back to matrix](#)

A.4.2.4 Panel / Antaira Tech ANT-PA-2419 Antenna

FCC Spurious Emissions 1-18 GHz

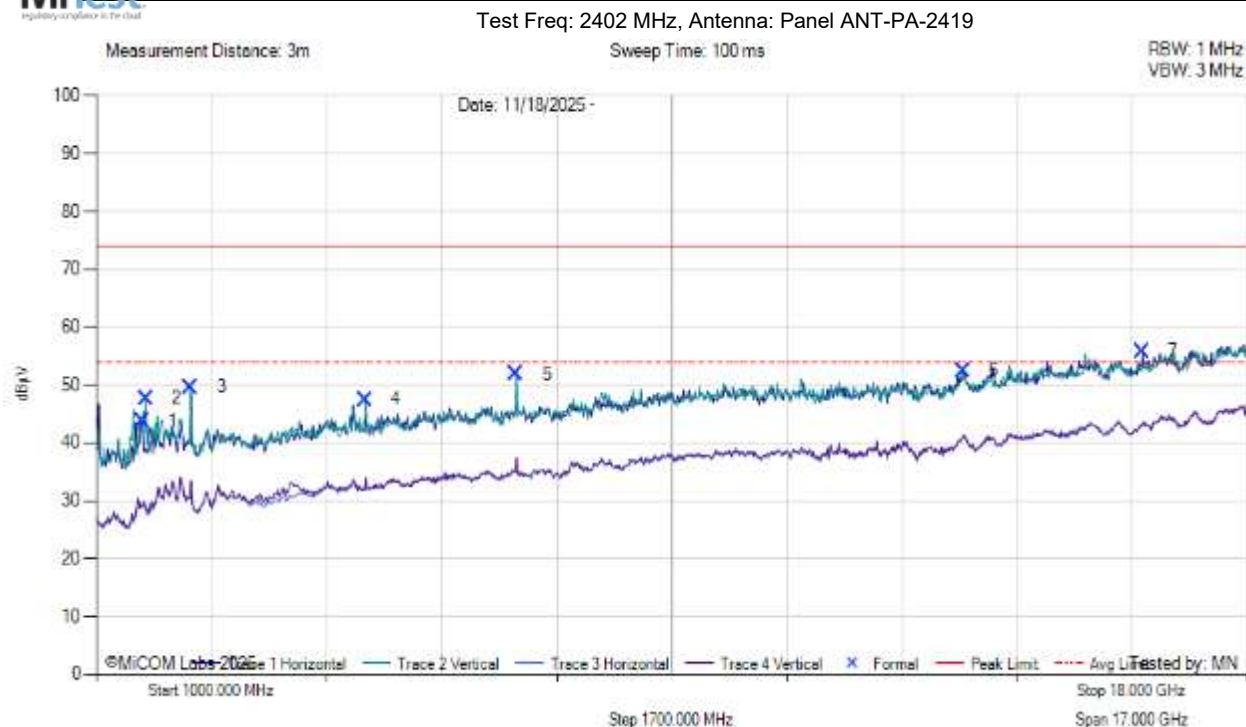

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1680.00	57.04	2.55	-15.85	43.74	MaxP	Horizontal	150	150	74.0	-30.3	Pass
2	1731.00	60.43	2.59	-15.33	47.69	MaxP	Vertical	150	269	74.0	-26.3	Pass
3	2394.00	58.70	3.02	-12.11	49.61	MaxP	Vertical	199	0	74.0	-24.4	Pass
4	4978.00	56.25	3.90	-12.65	47.50	MaxP	Vertical	150	179	74.0	-26.5	Pass
5	7205.00	54.87	4.52	-7.46	51.92	MaxP	Vertical	150	239	74.0	-22.1	Pass
6	13801.00	52.77	6.33	-6.61	52.49	MaxP	Horizontal	199	150	74.0	-21.5	Pass
7	16453.00	49.23	6.88	-0.26	55.85	MaxP	Horizontal	199	60	74.0	-18.1	Pass


Test Notes: Panel ANT-PA-2419 antenna used. 2402MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

[back to matrix](#)



FCC Spurious Emissions 1-18 GHz

Test Freq: 2440 MHz, Antenna: Panel ANT-PA-2419

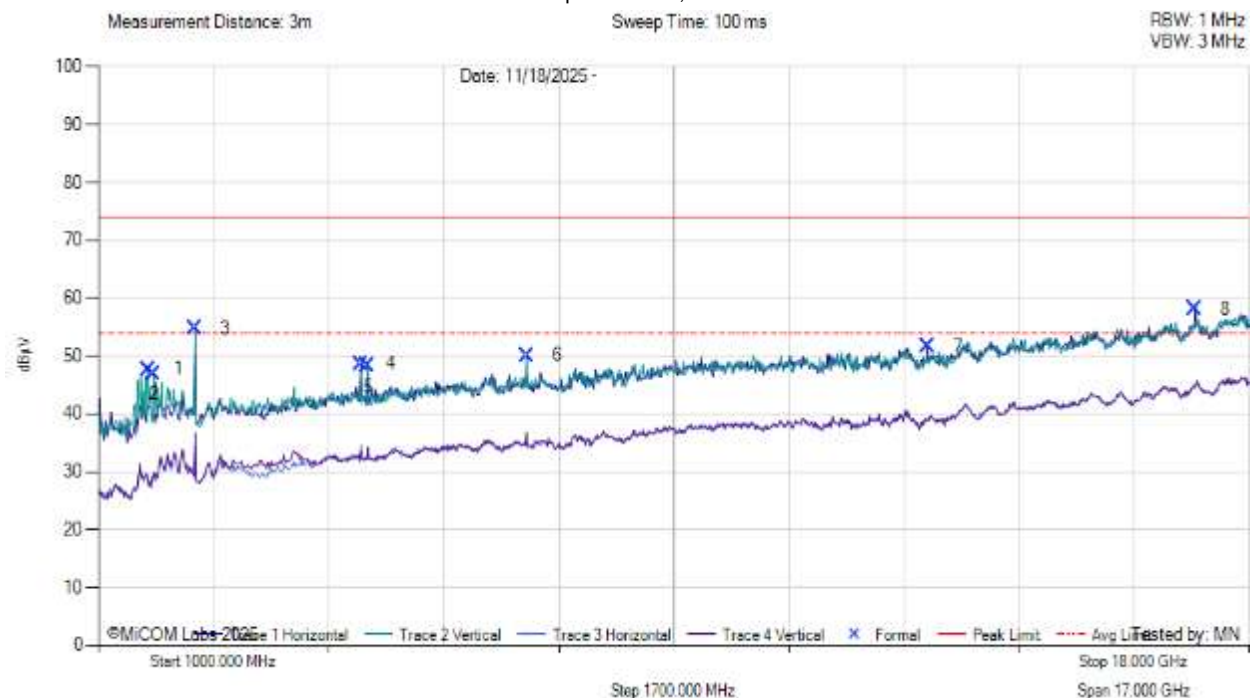

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1731.00	60.41	2.59	-15.33	47.67	MaxP	Vertical	199	149	74.0	-26.3	Pass
2	1816.00	58.80	2.66	-14.49	46.96	MaxP	Vertical	150	209	74.0	-27.0	Pass
3	2428.00	63.70	3.04	-11.89	54.85	MaxP	Vertical	150	0	74.0	-19.2	Pass
4	4876.00	57.26	3.92	-12.48	48.70	MaxP	Horizontal	150	150	74.0	-25.3	Pass
5	4978.00	57.01	3.90	-12.65	48.25	MaxP	Vertical	199	89	74.0	-25.7	Pass
6	7324.00	53.00	4.56	-7.45	50.11	MaxP	Vertical	199	179	74.0	-23.9	Pass
7	13240.00	52.92	6.22	-7.47	51.66	MaxP	Horizontal	150	150	74.0	-22.3	Pass
8	17201.00	50.68	7.13	0.35	58.16	MaxP	Horizontal	199	90	74.0	-15.8	Pass


Test Notes: Panel ANT-PA-2419 antenna used. 2440MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

[back to matrix](#)



FCC Spurious Emissions 1-18 GHz

Test Freq: 2480 MHz, Antenna: Panel ANT-PA-2419

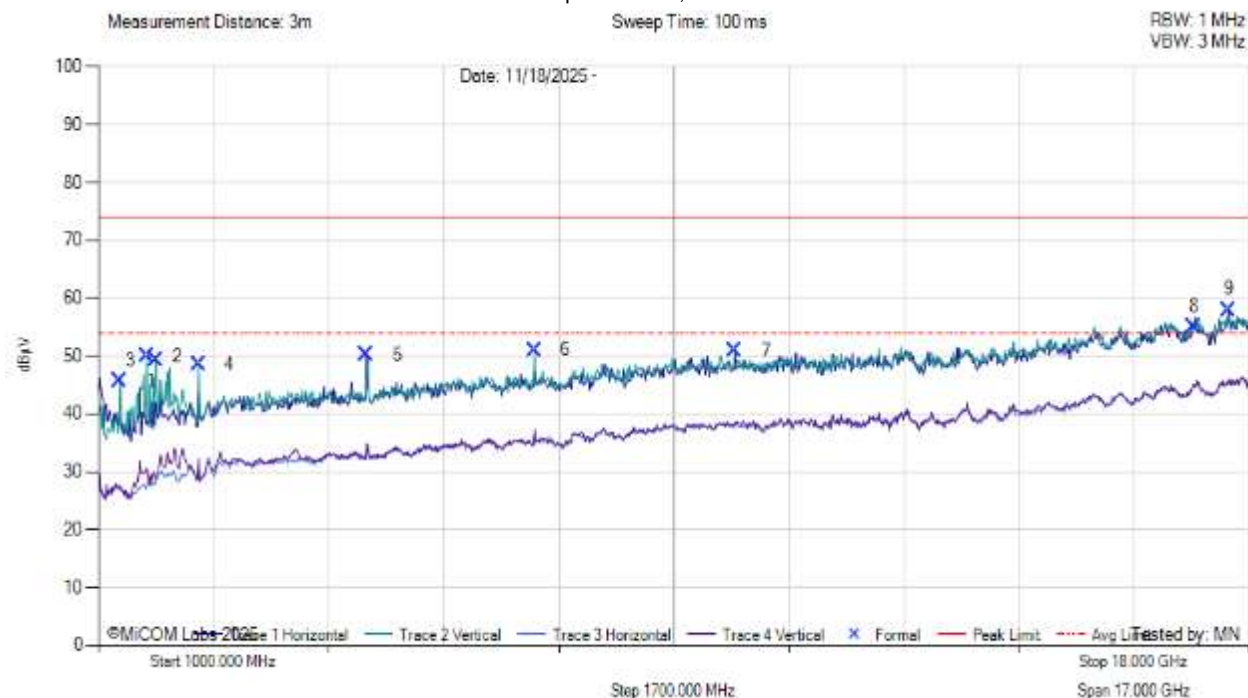

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1323.00	59.50	2.33	-16.21	45.61	MaxP	Vertical	199	269	74.0	-28.4	Pass
2	1714.00	62.96	2.58	-15.55	50.00	MaxP	Vertical	199	149	74.0	-24.0	Pass
3	1850.00	61.05	2.66	-14.40	49.31	MaxP	Vertical	199	269	74.0	-24.7	Pass
4	2479.00	57.21	3.06	-11.72	48.55	MaxP	Vertical	149	0	74.0	-25.5	Pass
5	4961.00	59.03	3.90	-12.71	50.22	MaxP	Horizontal	149	180	74.0	-23.8	Pass
6	7443.00	54.06	4.62	-7.60	51.08	MaxP	Vertical	149	29	74.0	-22.9	Pass
7	10401.00	50.01	5.61	-4.76	50.87	MaxP	Horizontal	149	330	74.0	-23.1	Pass
8	17184.00	47.48	7.16	0.45	55.08	MaxP	Vertical	149	149	74.0	-18.9	Pass
9	17694.00	49.98	7.82	0.17	57.98	MaxP	Horizontal	149	270	74.0	-16.0	Pass

Test Notes: Panel ANT-PA-2419 antenna used. 2480MHz 3.3V PS, Power Supply is under the table and laptop is on the table.


[back to matrix](#)

A.4.2.5 Flex / TAOGLAS FXP74.07.0100A



FCC Spurious Emissions 1-18 GHz

Test Freq: 2402 MHz, Antenna: TAOGLAS

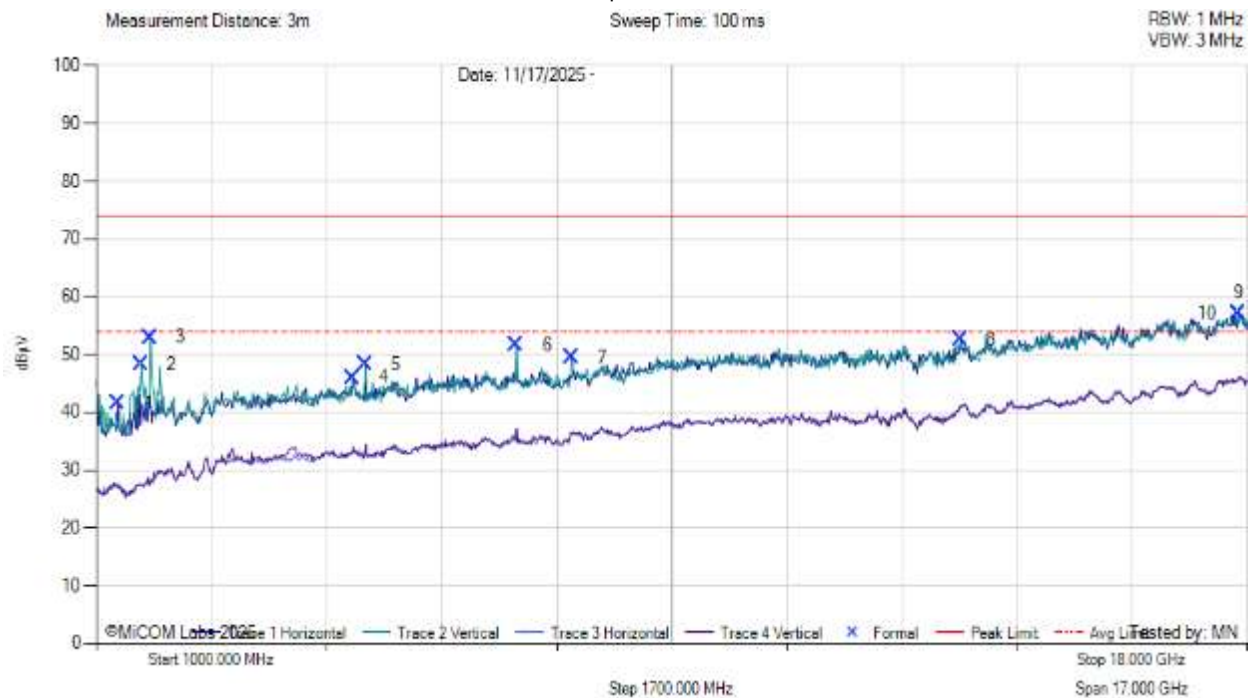

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1323.00	55.46	2.33	-16.21	41.58	MaxP	Horizontal	150	270	74.0	-32.4	Pass
2	1663.00	61.87	2.54	-16.04	48.37	MaxP	Vertical	150	149	74.0	-25.6	Pass
3	1799.00	64.96	2.65	-14.67	52.94	MaxP	Vertical	199	270	74.0	-21.1	Pass
4	4791.00	54.51	3.84	-12.31	46.04	MaxP	Horizontal	150	300	74.0	-28.0	Pass
5	4978.00	57.13	3.90	-12.65	48.37	MaxP	Vertical	199	209	74.0	-25.6	Pass
6	7205.00	54.57	4.52	-7.46	51.62	MaxP	Vertical	151	0	74.0	-22.4	Pass
7	8021.00	52.59	4.78	-7.83	49.55	MaxP	Vertical	150	90	74.0	-24.5	Pass
8	13767.00	53.07	6.30	-6.70	52.66	MaxP	Horizontal	150	330	74.0	-21.3	Pass
9	17864.00	48.08	7.77	1.31	57.17	MaxP	Vertical	150	59	74.0	-16.8	Pass
10	17864.00	48.09	7.77	1.31	57.18	MaxP	Horizontal	199	210	74.0	-16.8	Pass


Test Notes: TAOGLAS antenna. 2402 MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

[back to matrix](#)



FCC Spurious Emissions 1-18 GHz

Test Freq: 2440 MHz, Antenna: TAOGLAS

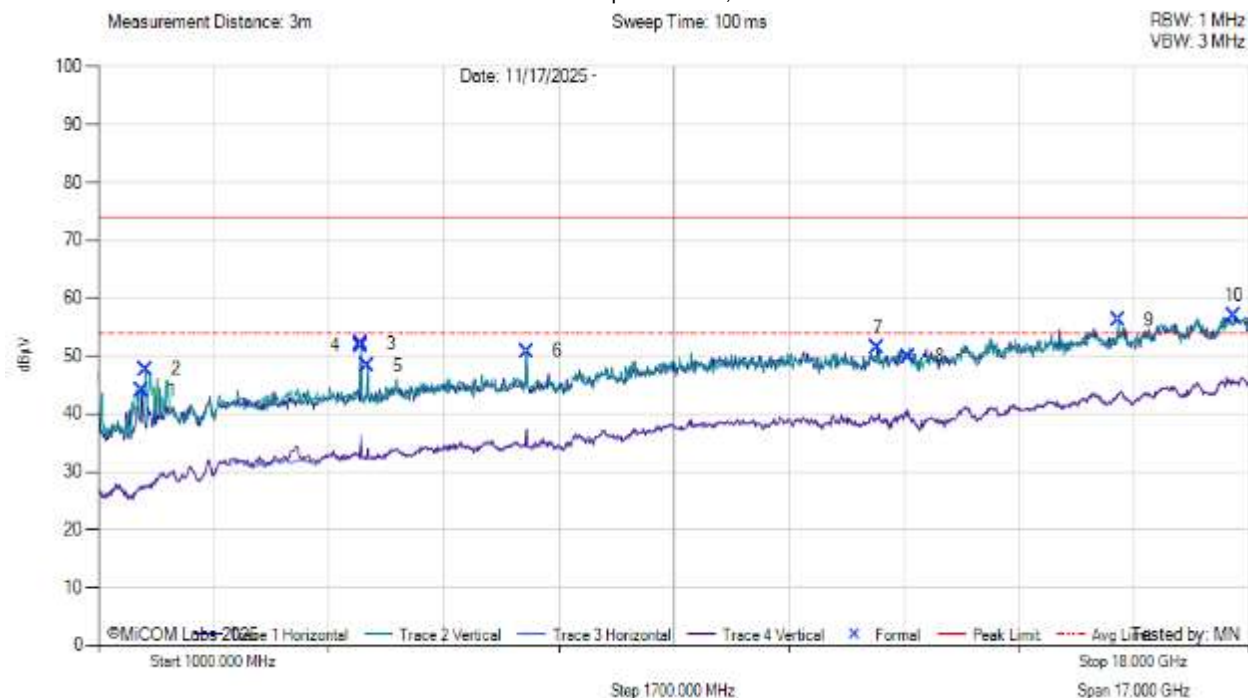

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1646.00	57.73	2.52	-16.24	44.01	MaxP	Horizontal	150	240	74.0	-30.0	Pass
2	1697.00	60.94	2.52	-15.76	47.70	MaxP	Vertical	150	149	74.0	-26.3	Pass
3	4876.00	60.65	3.92	-12.48	52.09	MaxP	Horizontal	150	300	74.0	-21.9	Pass
4	4876.00	60.13	3.92	-12.48	51.75	MaxP	Vertical	150	330	74.0	-22.2	Pass
5	4978.00	57.12	3.90	-12.65	48.36	MaxP	Vertical	199	209	74.0	-25.6	Pass
6	7324.00	53.70	4.56	-7.45	50.81	MaxP	Vertical	151	0	74.0	-23.2	Pass
7	12509.00	52.34	5.63	-6.50	51.47	MaxP	Horizontal	150	60	74.0	-22.5	Pass
8	12968.00	50.96	6.52	-7.63	49.85	MaxP	Vertical	199	179	74.0	-24.2	Pass
9	16062.00	50.16	6.63	-0.55	56.24	MaxP	Vertical	199	269	74.0	-17.8	Pass
10	17779.00	48.26	7.65	1.01	56.92	MaxP	Horizontal	150	210	74.0	-17.1	Pass


Test Notes: TAOGLAS antenna. 2440 MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

[back to matrix](#)



FCC Spurious Emissions 1-18 GHz

Test Freq: 2480 MHz, Antenna: TAOGLAS

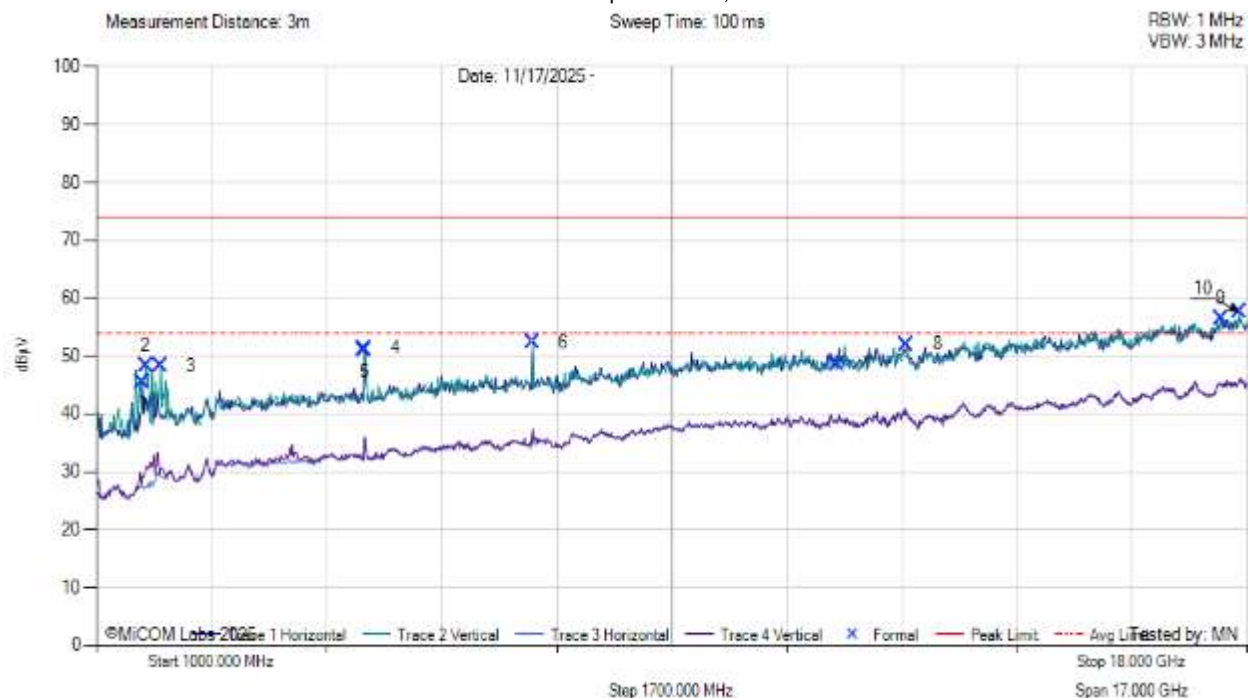

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass/Fail
1	1680.00	58.76	2.55	-15.85	45.47	MaxP	Horizontal	150	180	74.0	-28.5	Pass
2	1731.00	61.04	2.59	-15.33	48.30	MaxP	Vertical	150	149	74.0	-25.7	Pass
3	1952.00	59.20	2.71	-13.60	48.31	MaxP	Vertical	199	270	74.0	-25.7	Pass
4	4961.00	60.10	3.90	-12.71	51.29	MaxP	Horizontal	150	330	74.0	-22.7	Pass
5	4961.00	59.78	3.90	-12.71	50.97	MaxP	Horizontal	150	330	74.0	-23.0	Pass
6	7443.00	55.33	4.62	-7.60	52.35	MaxP	Vertical	151	0	74.0	-21.6	Pass
7	11948.00	49.20	4.89	-5.58	48.50	MaxP	Horizontal	199	210	74.0	-25.5	Pass
8	12968.00	53.14	6.52	-7.63	52.03	MaxP	Vertical	150	330	74.0	-22.0	Pass
9	17609.00	49.42	7.35	-0.27	56.50	MaxP	Horizontal	150	150	74.0	-17.5	Pass
10	17881.00	48.05	8.07	1.46	57.58	MaxP	Vertical	150	149	74.0	-16.4	Pass

Test Notes: TAOGLAS antenna. 2480 MHz 3.3V PS, Power Supply is under the table and laptop is on the table.


[back to matrix](#)

A.4.2.6 Yagi / TECHTOO STKA-YA24-18SM Antenna



FCC Spurious Emissions 1-18 GHz

Test Freq: 2402 MHz, Antenna: Yagi STKA-YA24-18SM

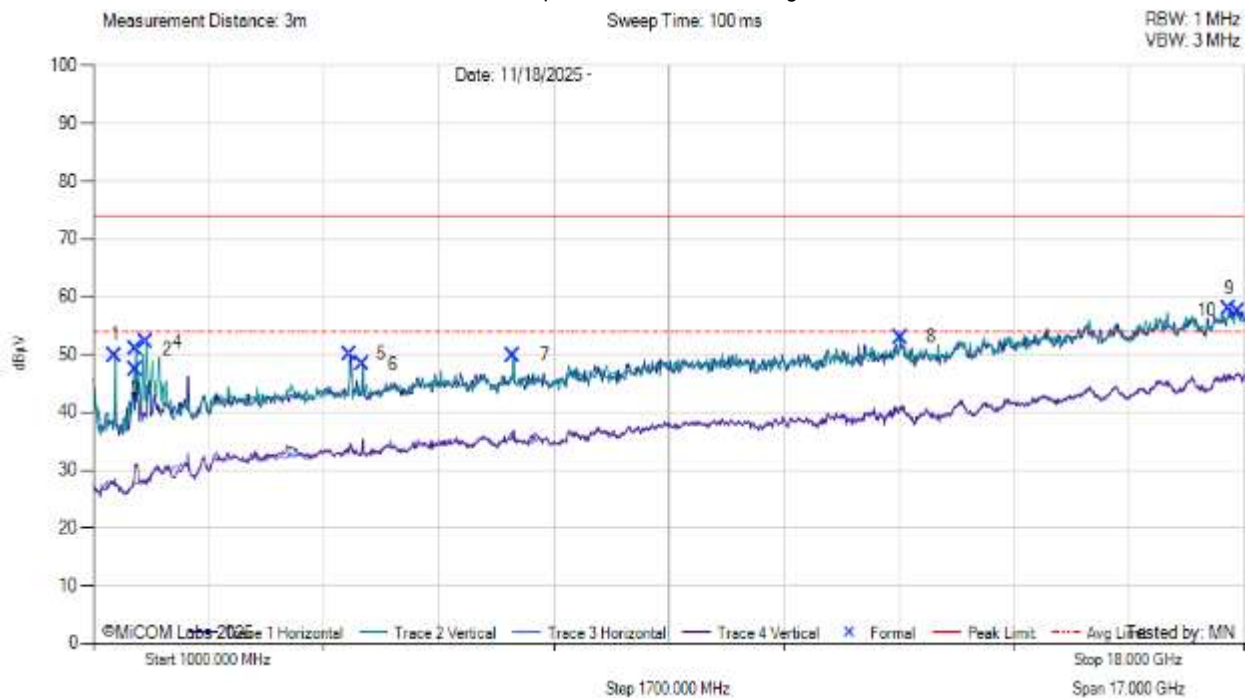

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1323.00	63.73	2.33	-16.21	49.84	MaxP	Vertical	199	269	74.0	-24.2	Pass
2	1629.00	64.81	2.49	-16.33	50.96	MaxP	Vertical	149	269	74.0	-23.0	Pass
3	1629.00	61.31	2.49	-16.33	47.46	MaxP	Horizontal	199	270	74.0	-26.5	Pass
4	1782.00	64.39	2.59	-14.83	52.15	MaxP	Vertical	149	269	74.0	-21.8	Pass
5	4791.00	58.55	3.84	-12.31	50.08	MaxP	Horizontal	149	300	74.0	-23.9	Pass
6	4978.00	57.06	3.90	-12.65	48.30	MaxP	Vertical	199	89	74.0	-25.7	Pass
7	7205.00	52.80	4.52	-7.46	49.85	MaxP	Vertical	149	239	74.0	-24.1	Pass
8	12917.00	54.00	6.92	-7.97	52.94	MaxP	Horizontal	149	210	74.0	-21.1	Pass
9	17779.00	49.22	7.65	1.01	57.87	MaxP	Horizontal	199	90	74.0	-16.1	Pass
10	17898.00	48.23	7.94	1.36	57.52	MaxP	Vertical	149	179	74.0	-16.5	Pass


Test Notes: Yagi STKA-YA24-18SM antenna used. 2402 MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

[back to matrix](#)



FCC Spurious 1 -18 GHz

Test Freq: 2440 MHz, Antenna: Yagi STKA-YA24-18SM

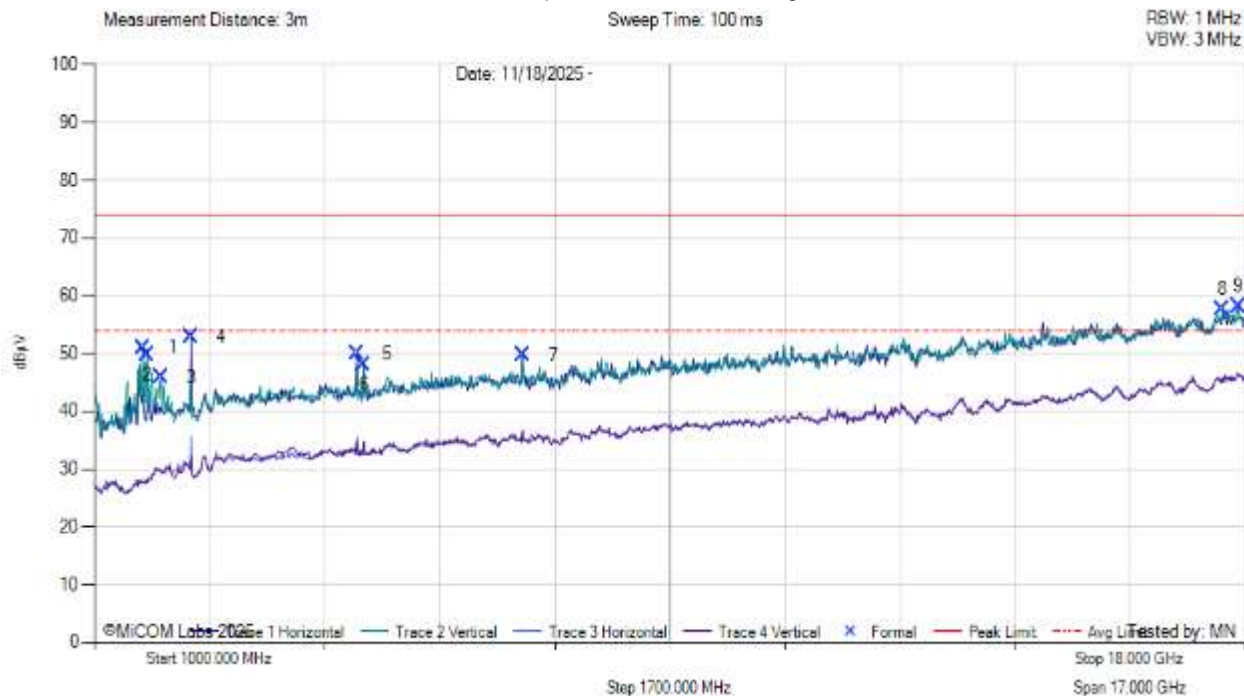

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1714.00	64.04	2.58	-15.55	51.08	MaxP	Vertical	199	150	74.0	-22.9	Pass
2	1782.00	62.11	2.59	-14.83	49.87	MaxP	Vertical	199	269	74.0	-24.1	Pass
3	1986.00	56.53	2.73	-13.33	45.93	MaxP	Vertical	149	179	74.0	-28.1	Pass
4	2428.00	61.64	3.04	-11.89	52.79	MaxP	Horizontal	199	0	74.0	-21.2	Pass
5	4876.00	58.59	3.92	-12.48	50.03	MaxP	Horizontal	149	300	74.0	-24.0	Pass
6	4978.00	56.92	3.90	-12.65	48.17	MaxP	Horizontal	149	240	74.0	-25.8	Pass
7	7324.00	52.62	4.56	-7.45	49.73	MaxP	Vertical	149	0	74.0	-24.3	Pass
8	17660.00	50.42	7.20	0.03	57.66	MaxP	Horizontal	199	90	74.0	-16.3	Pass
9	17898.00	48.88	7.94	1.36	58.18	MaxP	Vertical	149	270	74.0	-15.8	Pass


Test Notes: Yagi STKA-YA24-18SM antenna used. 2440 MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

[back to matrix](#)



FCC Spurious Emissions 1-18 GHz

Test Freq: 2480 MHz, Antenna: Yagi STKA-YA24-18SM

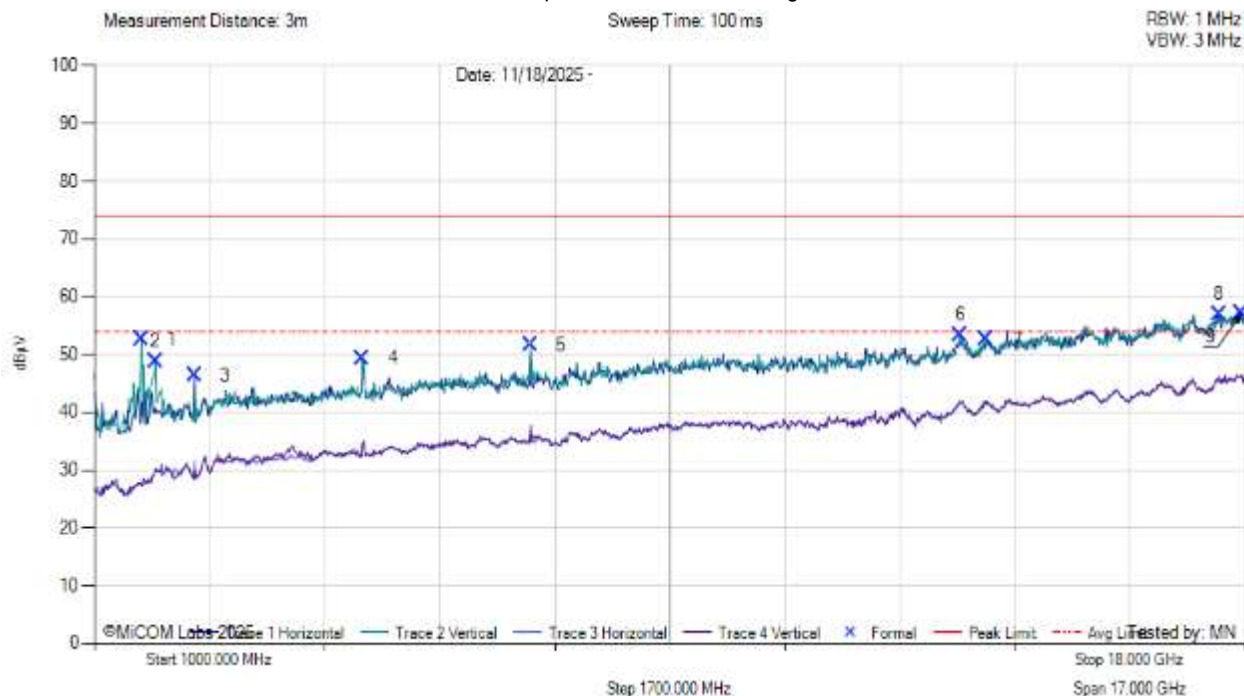

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	1697.00	65.92	2.52	-15.76	52.68	MaxP	Vertical	199	149	74.0	-21.3	Pass
2	1901.00	60.00	2.68	-13.86	48.82	MaxP	Vertical	150	209	74.0	-25.2	Pass
3	2479.00	55.02	3.06	-11.72	46.36	MaxP	Horizontal	199	0	74.0	-27.6	Pass
4	4961.00	58.15	3.90	-12.71	49.34	MaxP	Horizontal	150	330	74.0	-24.7	Pass
5	7443.00	54.64	4.62	-7.60	51.66	MaxP	Vertical	150	0	74.0	-22.3	Pass
6	13784.00	53.46	6.46	-6.65	53.27	MaxP	Horizontal	150	240	74.0	-20.7	Pass
7	14175.00	53.36	6.53	-7.21	52.69	MaxP	Vertical	150	0	74.0	-21.3	Pass
8	17609.00	49.90	7.35	-0.27	56.98	MaxP	Horizontal	199	60	74.0	-17.0	Pass
9	17949.00	48.39	8.05	0.80	57.24	MaxP	Vertical	150	150	74.0	-16.8	Pass


Test Notes: Yagi STKA-YA24-18SM antenna used. 2480 MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

[back to matrix](#)

A.3.2.3. Restricted Edge & Band-Edge Emissions

A.4.2.3.1 Bent Metal Antenna / Abracon PRO-OB-440 (on Digi board)a

BE 2400 MHz

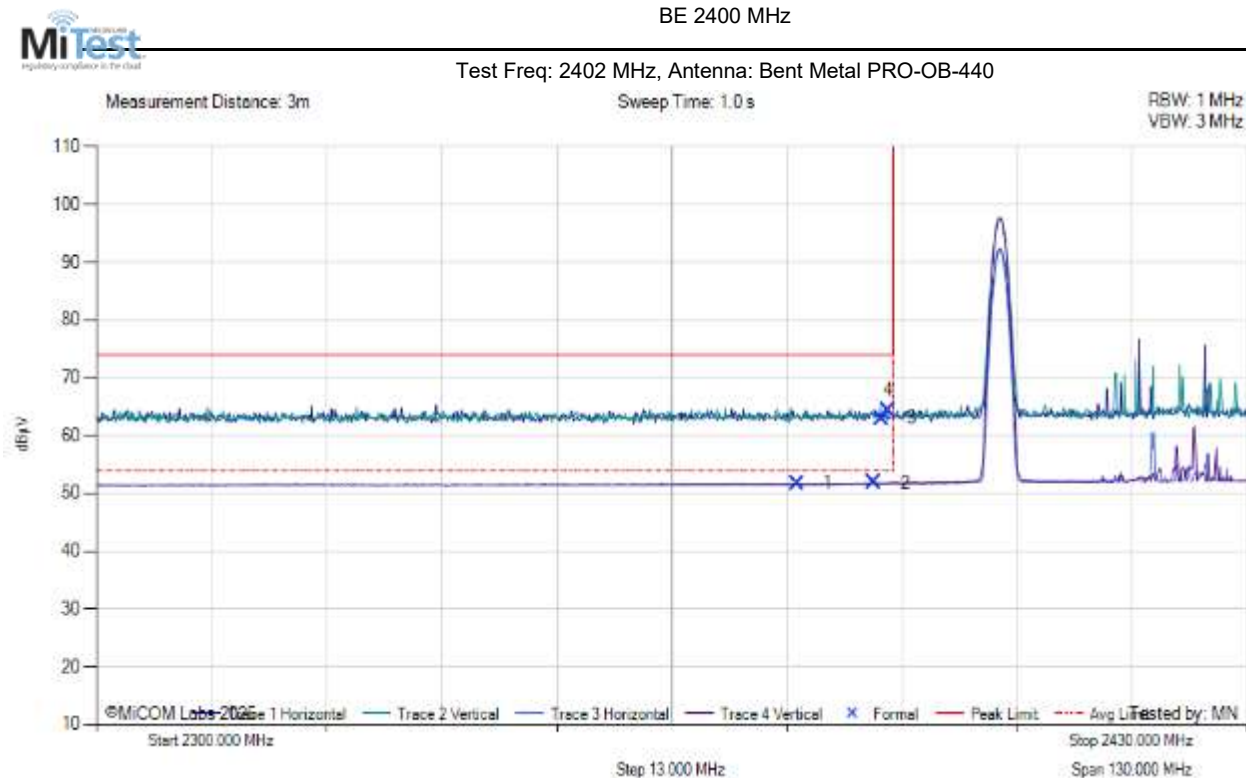


2300.00 - 2430.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2379.17	16.69	2.97	32.09	51.74	AVG	Vertical	149	89	54.0	-2.3	Pass
2	2387.88	16.74	2.99	32.13	51.87	AVG	Horizontal	149	60	54.0	-2.1	Pass
3	2388.66	27.86	3.00	32.14	62.99	MaxP	Vertical	98	179	74.0	-11.0	Pass
4	2389.44	29.14	3.00	32.14	64.28	MaxP	Horizontal	149	60	74.0	-9.7	Pass

Test Notes: Bent Metal PRO-OB-440 antenna used. 2402MHz 3.3V PS, PS is on the table and laptop is on the table.

[back to matrix](#)

2480 MHz

BE 2483.5 MHz

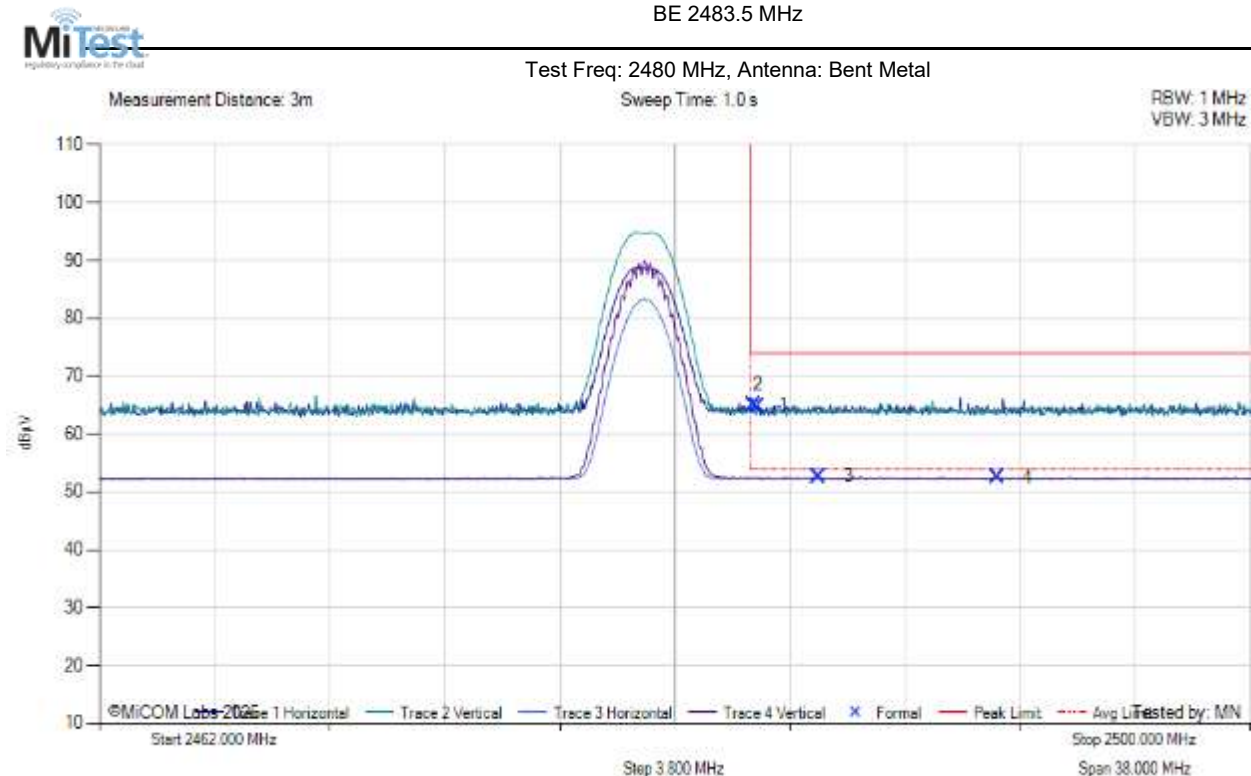


2462.00 - 2500.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2483.58	29.46	3.08	32.41	64.96	MaxP	Vertical	149	149	74.0	-9.0	Pass
2	2483.74	29.43	3.08	32.41	64.93	MaxP	Horizontal	100	90	74.0	-9.1	Pass
3	2485.75	17.15	3.09	32.42	52.65	AVG	Horizontal	149	120	54.0	-1.3	Pass
4	2491.64	17.09	3.09	32.43	52.61	AVG	Vertical	149	89	54.0	-1.4	Pass

Test Notes: Bent metal antenna used. High channel. 3.3V PS, Power Supply is under the table and laptop is on the table.

[back to matrix](#)

A.4.2.3.2 Dipole / Digi A24-HASM-450

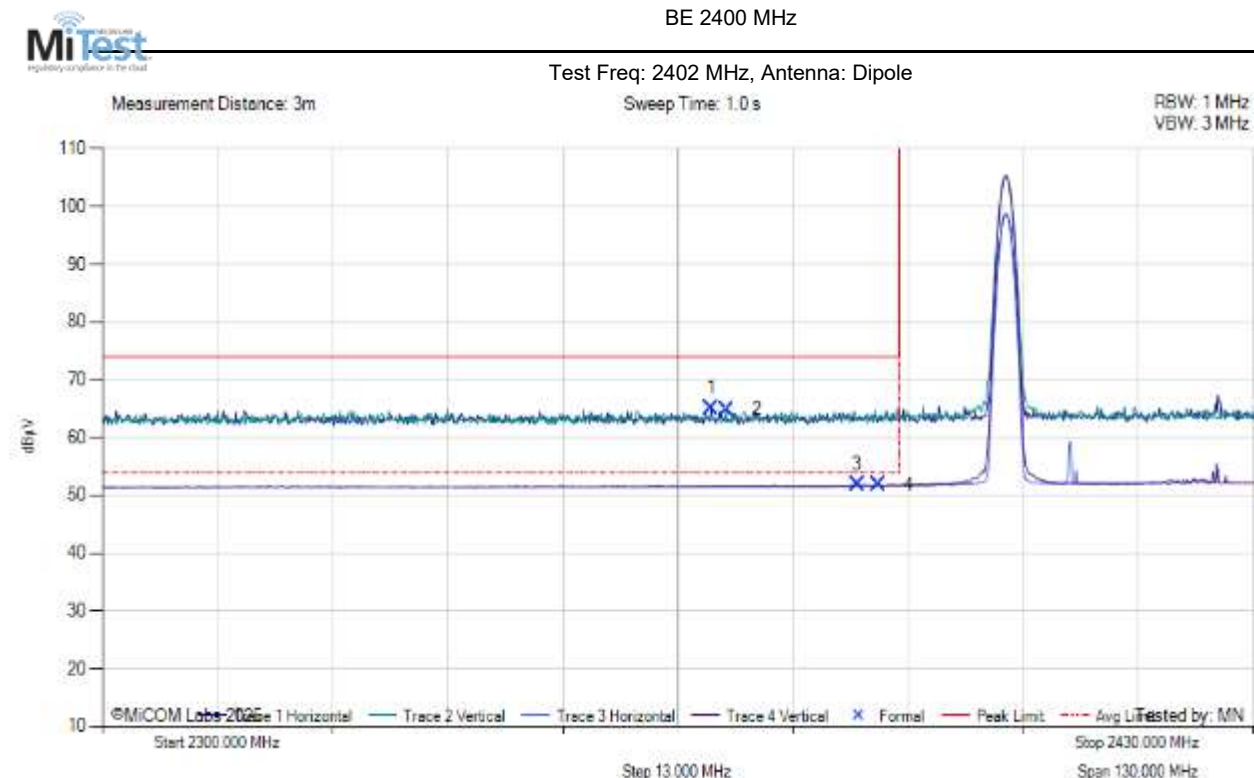

2300.00 - 2430.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2368.77	29.93	2.97	32.04	64.95	MaxP	Horizontal	100	120	74.0	-9.0	Pass
2	2370.46	29.87	2.98	32.05	64.90	MaxP	Vertical	149	29	74.0	-9.1	Pass
3	2385.28	16.77	2.98	32.12	51.87	AVG	Vertical	149	0	54.0	-2.1	Pass
4	2387.62	16.72	2.99	32.13	51.84	AVG	Horizontal	149	150	54.0	-2.2	Pass


Test Notes: Dipole antenna used. 2402MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

[back to matrix](#)



BE 2483.5 MHz

Test Freq: 2480 MHz, Antenna: Dipole

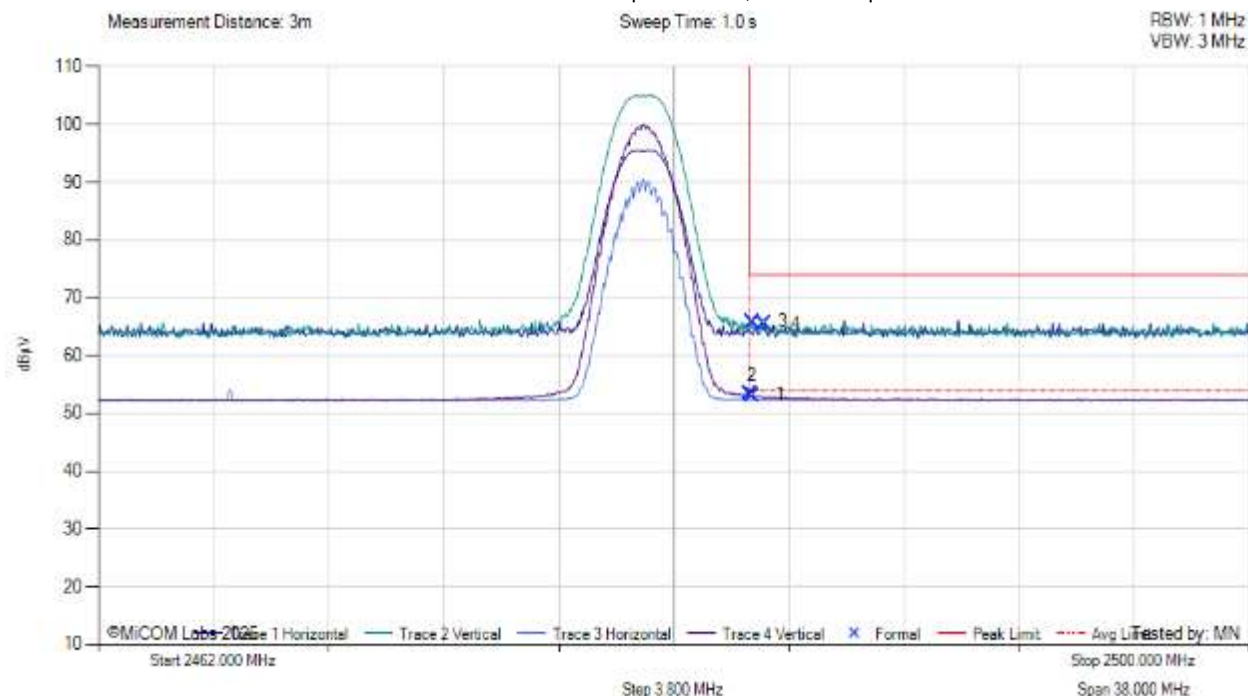

2462.00 - 2500.00 MHz

Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2483.51	17.71	3.08	32.41	53.20	AVG	Vertical	100	90	54.0	-0.8	Pass
2	2483.58	17.56	3.08	32.41	53.05	AVG	Vertical	149	59	54.0	-0.9	Pass
3	2483.58	30.39	3.08	32.41	65.88	MaxP	Vertical	100	59	74.0	-8.1	Pass
4	2484.00	29.97	3.08	32.41	65.46	MaxP	Horizontal	149	180	74.0	-8.5	Pass

Test Notes: Dipole antenna used. High channel. 3.3V PS, Power Supply is under the table and laptop is on the table.


[back to matrix](#)

A.4.2.3.3 Omni / L-com HG2415U-PRO Antenna

BE 2400 MHz



Test Freq: 2402 MHz, Antenna: Omni HG2415U-PRO

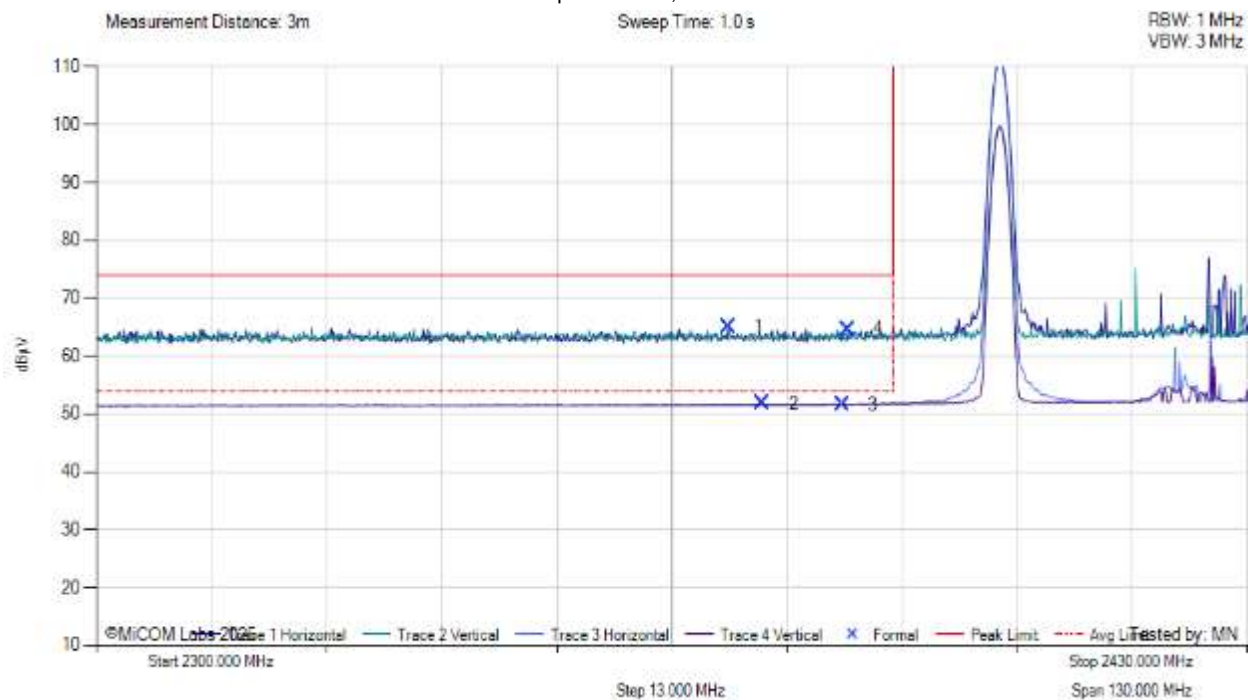

2300.00 - 2430.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2371.37	29.98	2.98	32.06	65.01	MaxP	Horizontal	149	120	74.0	-9.0	Pass
2	2375.27	16.72	2.97	32.07	51.77	AVG	Vertical	100	179	54.0	-2.2	Pass
3	2384.24	16.47	2.97	32.12	51.56	AVG	Horizontal	149	210	54.0	-2.4	Pass
4	2384.89	29.53	2.98	32.12	64.62	MaxP	Vertical	149	149	74.0	-9.4	Pass


Test Notes: Omni HG2415U-PRO antenna used. 2402MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

[back to matrix](#)



BE 2483.5 MHz

Test Freq: 2480 MHz, Antenna: Omni antenna

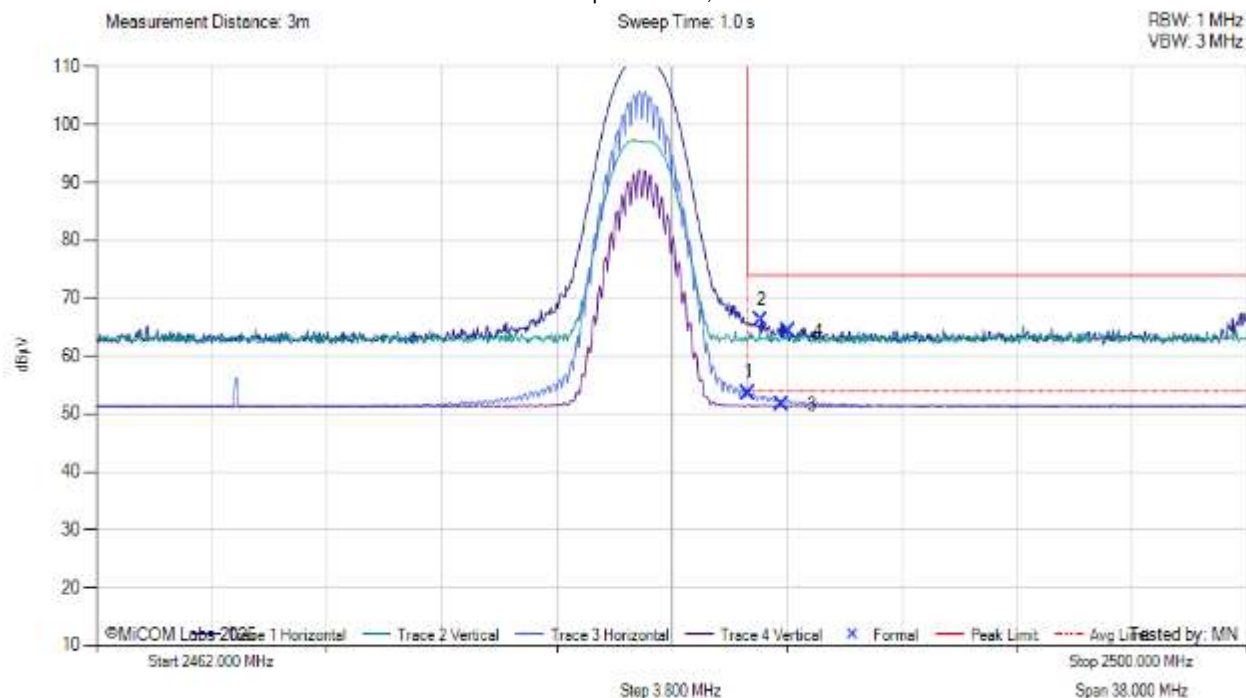

2462.00 - 2500.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2483.51	19.17	3.08	32.41	53.66	AVG	Horizontal	149	270	54.0	-0.3	Pass
2	2483.96	31.75	3.08	32.41	66.25	MaxP	Horizontal	149	270	74.0	-7.8	Pass
3	2484.61	17.12	3.08	32.42	51.62	AVG	Vertical	100	209	54.0	-2.4	Pass
4	2484.84	29.81	3.09	32.42	64.31	MaxP	Vertical	100	29	74.0	-9.7	Pass

Test Notes: Omni antenna used. High channel. 3.3V PS, Power Supply is under the table and laptop is on the table.


[back to matrix](#)

A.4.2.3.4 Panel / Antaira Tech ANT-PA-2419 Antenna

BE 2400 MHz



Test Freq: 2402 MHz, Antenna: Panel ANT-PA-2419

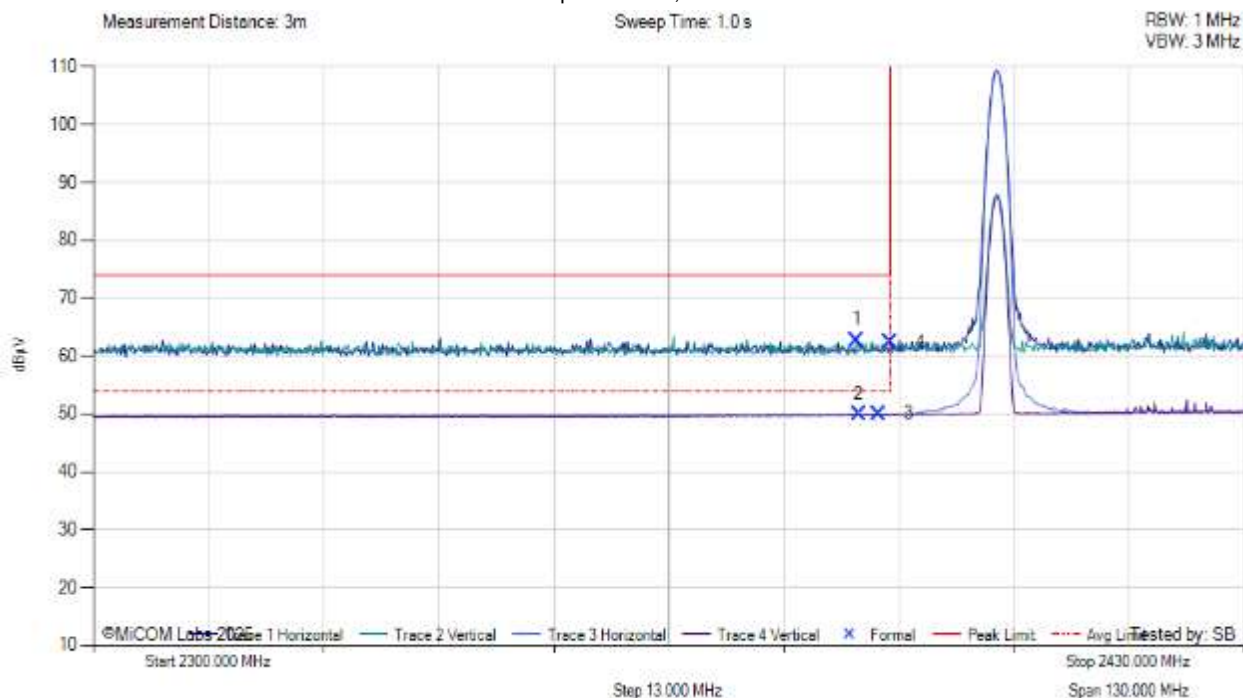

2300.00 - 2430.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2386.19	29.47	2.98	32.12	62.78	MaxP	Vertical	99	29	74.0	-11.2	Pass
2	2386.45	14.86	2.99	32.13	49.98	AVG	Vertical	99	33	54.0	-4.0	Pass
3	2388.66	16.68	3.00	32.14	50.01	AVG	Horizontal	149	0	54.0	-4.0	Pass
4	2389.96	29.01	3.01	32.14	62.35	MaxP	Horizontal	99	90	74.0	-11.6	Pass

Test Notes: Panel Antenna, Low Channel. 3.3V PS, Power Supply is under the table and laptop is on the table. 11 dB cable loss part of the antenna cable.

[back to matrix](#)

Equipment Configuration for BE 2483.5 MHz


Antenna:	ANT-PA02419	Variant:	BLE
Antenna Gain (dBi):	19	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	2480	Data Rate:	1M
Power Setting:	Max	Tested By:	SB

Test Measurement Results

BE 2483.5 MHz



Test Freq: 2480 MHz, Antenna: Panel ANT-PA-2419

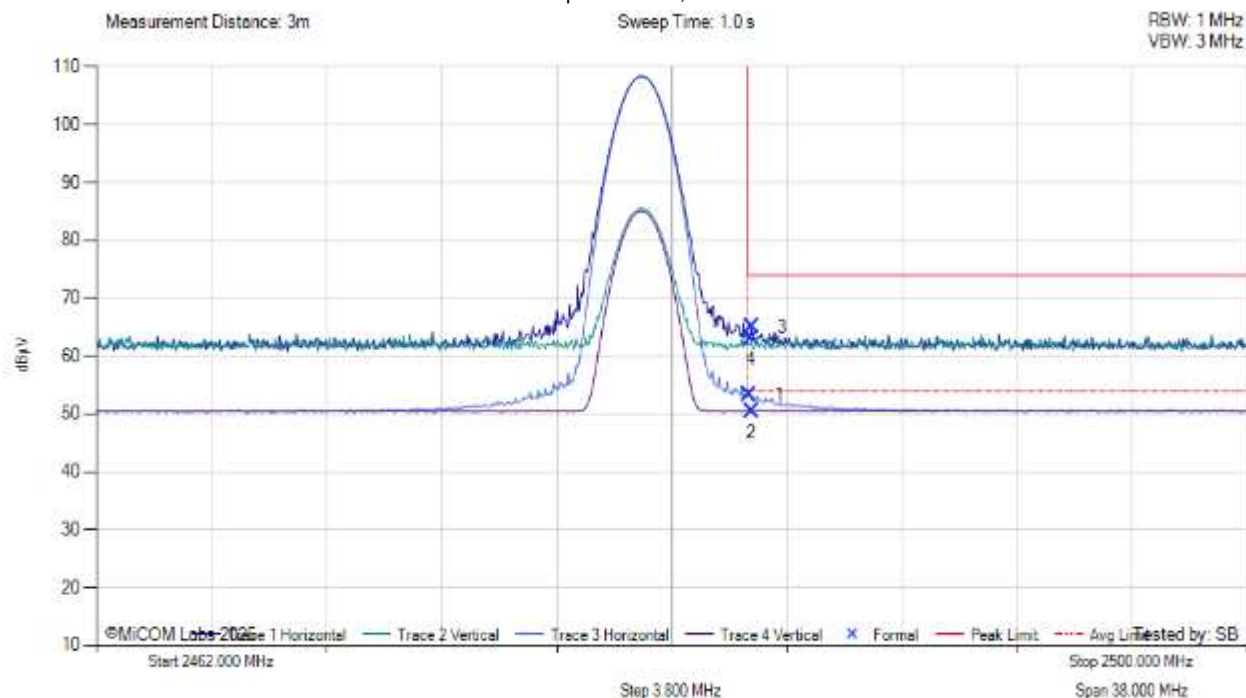

2462.00 - 2500.00 MHz


Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2483.55	19.61	3.08	32.41	53.31	AVG	Horizontal	149	0	54.0	-0.7	Pass
2	2483.62	16.70	3.08	32.41	50.39	AVG	Vertical	149	0	54.0	-3.6	Pass
3	2483.62	31.38	3.08	32.41	65.08	MaxP	Horizontal	149	0	74.0	-8.9	Pass
4	2483.62	27.57	3.08	32.41	63.06	MaxP	Vertical	149	0	74.0	-10.9	Pass

Test Notes: Panel Antenna, High Channel. 3.3V PS, Power Supply is under the table and laptop is on the table. 11 dB cable loss part of the antenna cable.

[back to matrix](#)

A.4.2.3.5 Flex / TAOGLAS FXP74.07.0100A

BE 2400 MHz

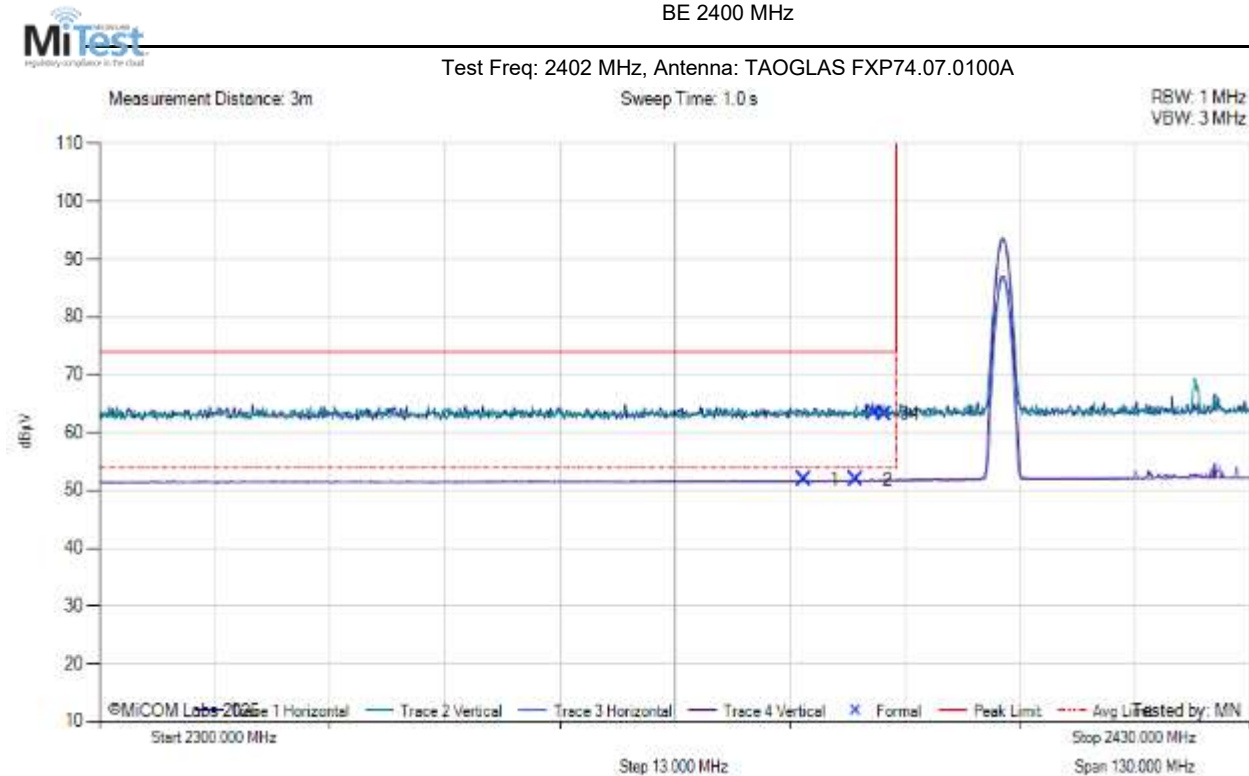

2300.00 - 2430.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	2379.56	16.72	2.96	32.09	51.77	AVG	Horizontal	100	210	54.0	-2.2	Pass
2	2385.54	16.77	2.98	32.12	51.87	AVG	Vertical	100	239	54.0	-2.1	Pass
3	2387.49	28.24	2.99	32.13	63.36	MaxP	Horizontal	149	60	74.0	-10.6	Pass
4	2388.66	28.01	3.00	32.14	63.14	MaxP	Vertical	149	239	74.0	-10.9	Pass


Test Notes: TAOGAS FXP74.07.0100A antenna used. 2402MHz 3.3V PS, Power Supply is under the table and laptop is on the table.

[back to matrix](#)



BE 2483.5 MHz

Test Freq: 2480 MHz, Antenna: TAOGLAS FXP74.07.0100A

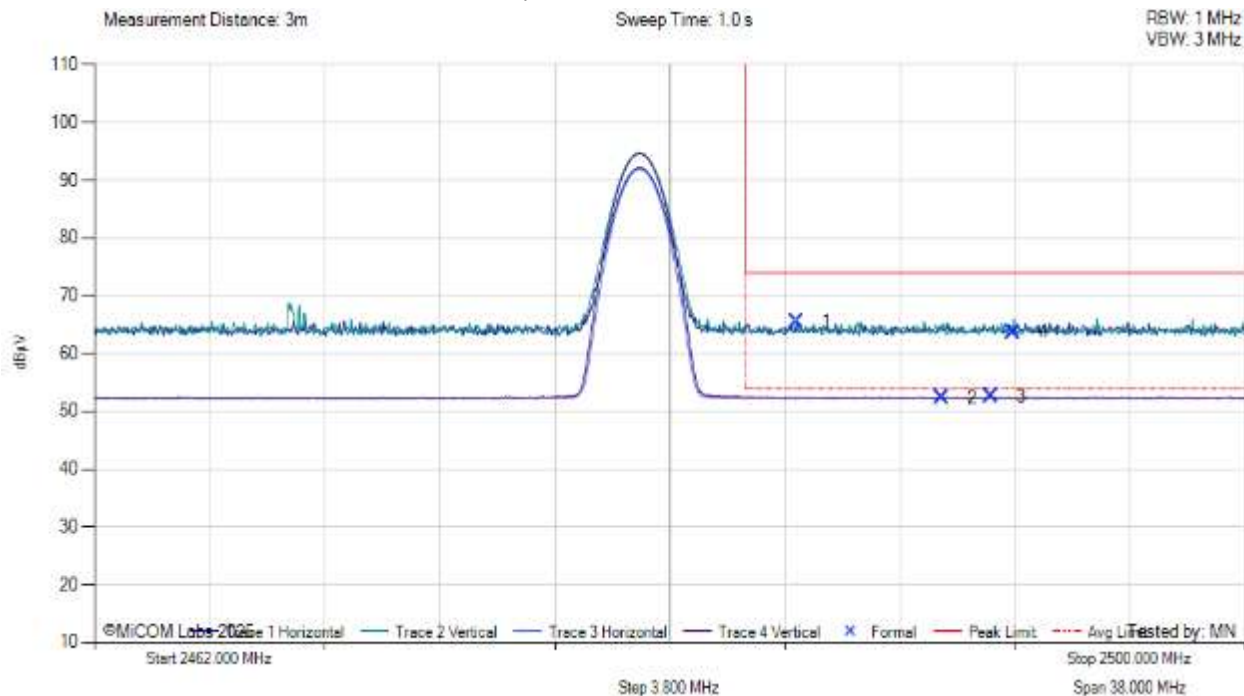

2462.00 - 2500.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2485.18	30.06	3.09	32.42	65.56	MaxP	Horizontal	100	180	74.0	-8.4	Pass
2	2489.97	16.81	3.10	32.43	52.34	AVG	Horizontal	149	0	54.0	-1.7	Pass
3	2491.60	17.09	3.09	32.43	52.61	AVG	Vertical	100	239	54.0	-1.4	Pass
4	2492.32	28.20	3.09	32.43	63.72	MaxP	Vertical	100	269	74.0	-10.3	Pass

Test Notes: TAOGLAS FXP74.07.0100A antenna used. 2480MHz 3.3V PS, Power Supply is under the table and laptop is on the table.


[back to matrix](#)

A.4.2.3.6 Yagi / TECHTOO STKA-YA24-18SM Antenna

BE 2400 MHz



Test Freq: 2402 MHz, Antenna: Yagi STKA-YA24-18SM

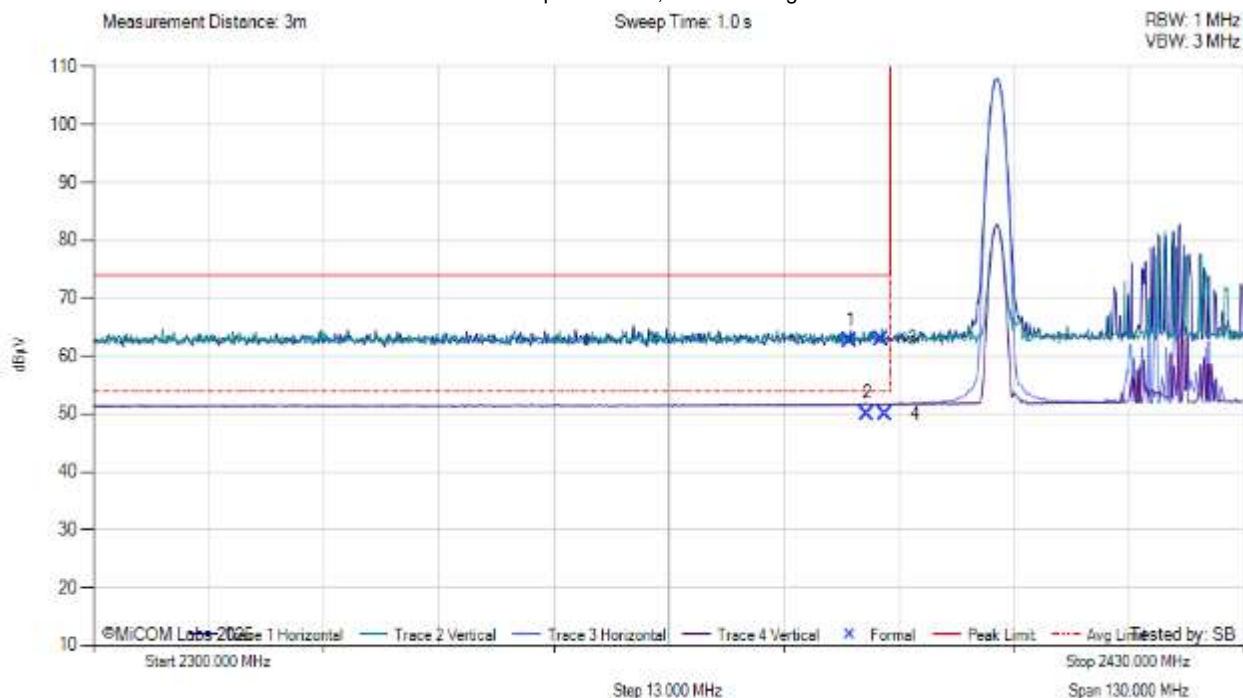

2300.00 - 2430.00 MHz												
Num	Frequency MHz	Raw dBμV	Cable Loss dB	AF dB/m	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
1	2385.54	31.08	2.98	32.12	64.38	MaxP	Horizontal	98.00	120.00	74.00	-9.62	Pass
2	2387.36	18.50	2.99	32.13	51.82	AVG	Vertical	149.00	90.00	54.00	-2.18	Pass
3	2389.05	31.44	3.00	32.14	64.78	MaxP	Vertical	149.00	59.00	74.00	-9.22	Pass
4	2389.44	18.45	3.00	32.14	51.79	AVG	Horizontal	98.00	60.00	54.00	-2.21	Pass


Test Notes: Yagi Antenna, Low Channel. 3.3V PS, Power Supply is under the table and laptop is on the table. 6 dB cable loss part of the antenna cable.

[back to matrix](#)

BE 2483.5 MHz



Test Freq: 2480 MHz, Antenna: Yagi STKA-YA24-18SM

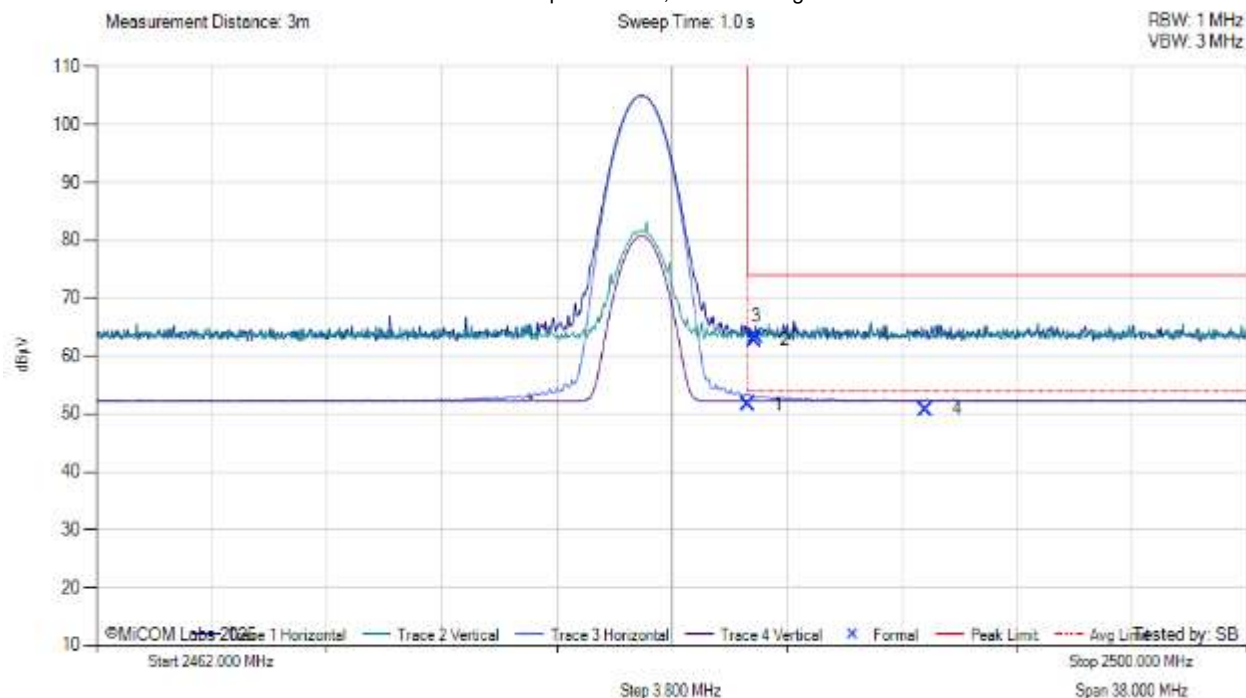


2462.00 - 2500.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	2483.51	19.73	3.08	32.41	53.42	AVG	Horizontal	149.00	0.00	54.00	-0.58	Pass
2	2483.74	30.84	3.08	32.41	64.54	MaxP	Vertical	101.00	0.00	74.00	-9.46	Pass
3	2483.77	31.44	3.08	32.41	65.14	MaxP	Horizontal	149.00	0.00	74.00	-8.86	Pass
4	2489.40	18.80	3.10	32.43	52.53	AVG	Vertical	100.00	59.00	54.00	-1.47	Pass

Test Notes: Yagi Antenna, High Channel. 3.3V PS, Power Supply is under the table and laptop is on the table. 6 dB cable loss part of the antenna cable.

[back to matrix](#)

APPENDIX B - TEST SETUP PHOTOGRAPHS

B.1. Conducted Test Setup

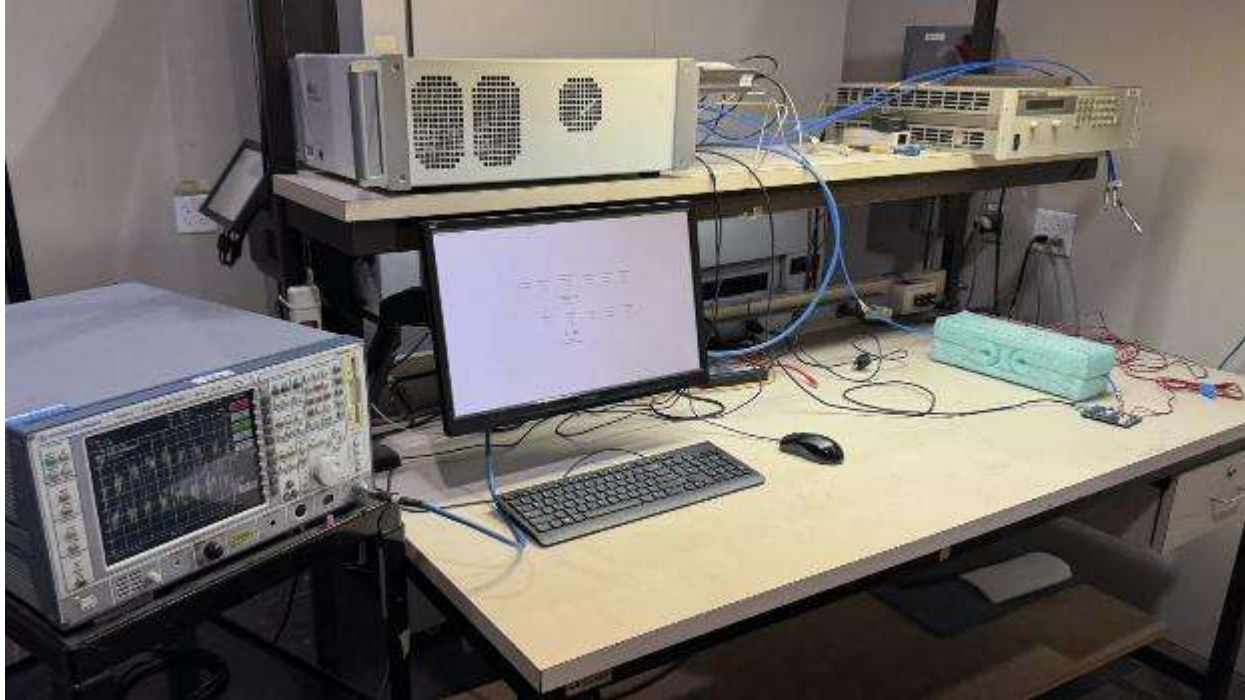


DTS BLE 2.4GHZ 1M 2M XB3P-9XR-UUS-001

B.2 Radiated Emissions Test Setup (Tx Spurious and Band Edge)


B.2.1 Bent Metal Antenna / Abracon PRO-OB-440 (on Digi board)



[Model: XB3P-9XR-CMS-001
SN: 0013A2FFD89B89F4]

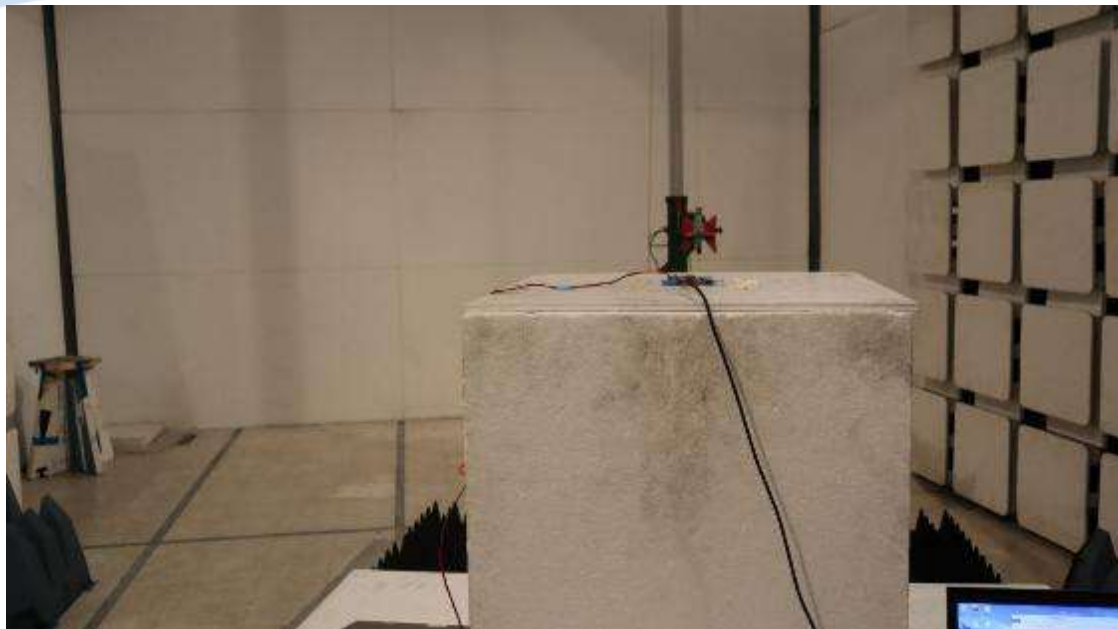


Bent Metal (2.4GHz) antenna used, Horizontal Back View

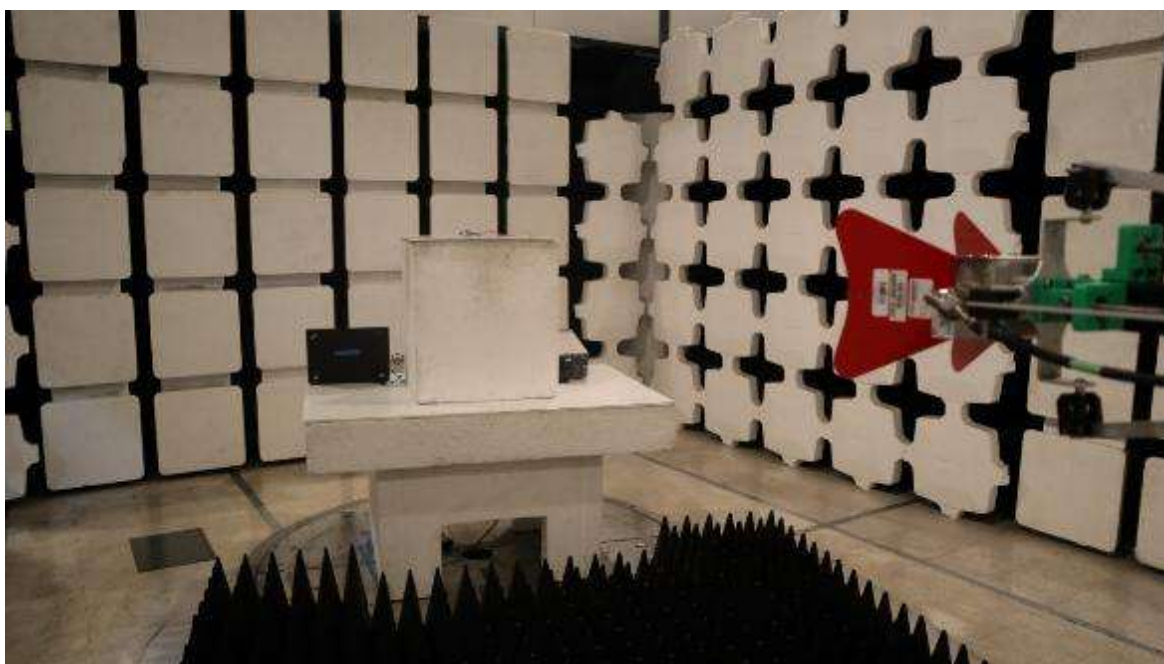

Bent Metal (2.4GHz) antenna used, Horizontal Front View




Bent Metal (2.4GHz) antenna used, Vertical Back View

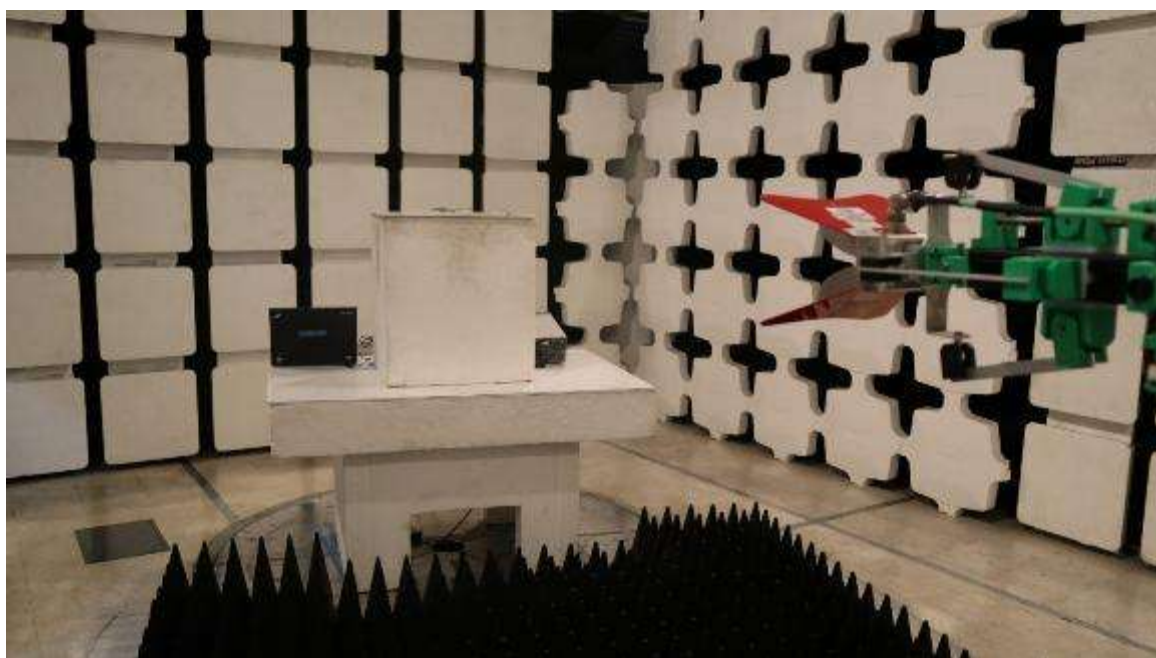


Bent Metal (2.4GHz) antenna used, Vertical Front View


B.2.2 Dipole / Digi A24-HASM-450

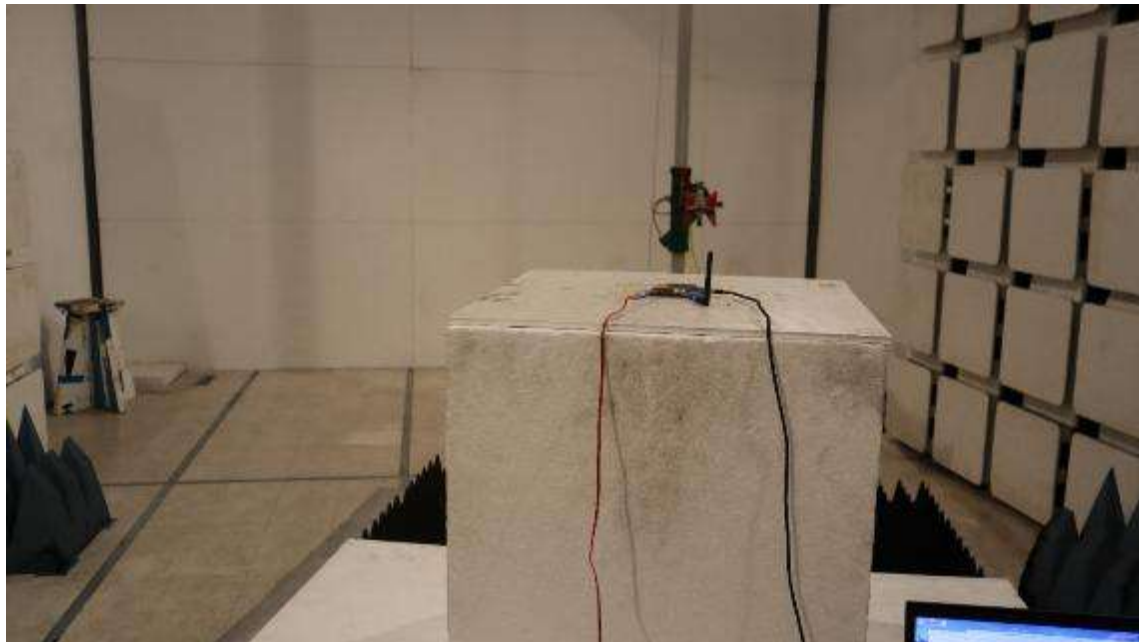


Dipole A24-HASM-450 (2.4GHz) antenna used, Horizontal Back View

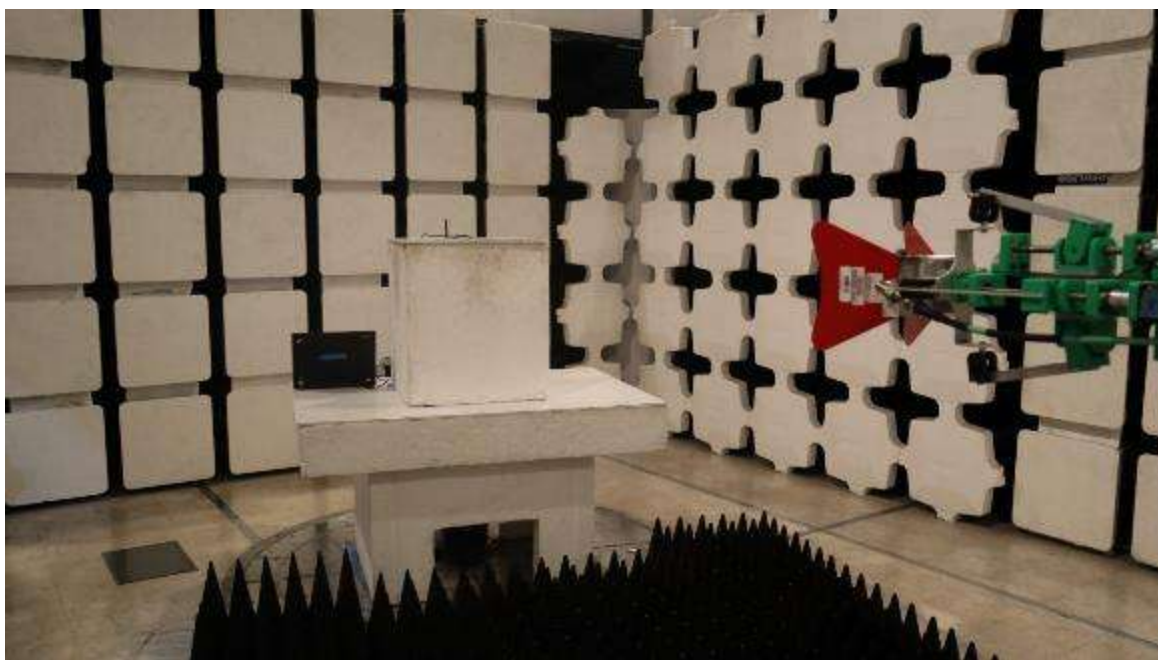

Dipole A24-HASM-450 (2.4GHz) antenna used, Horizontal Front View

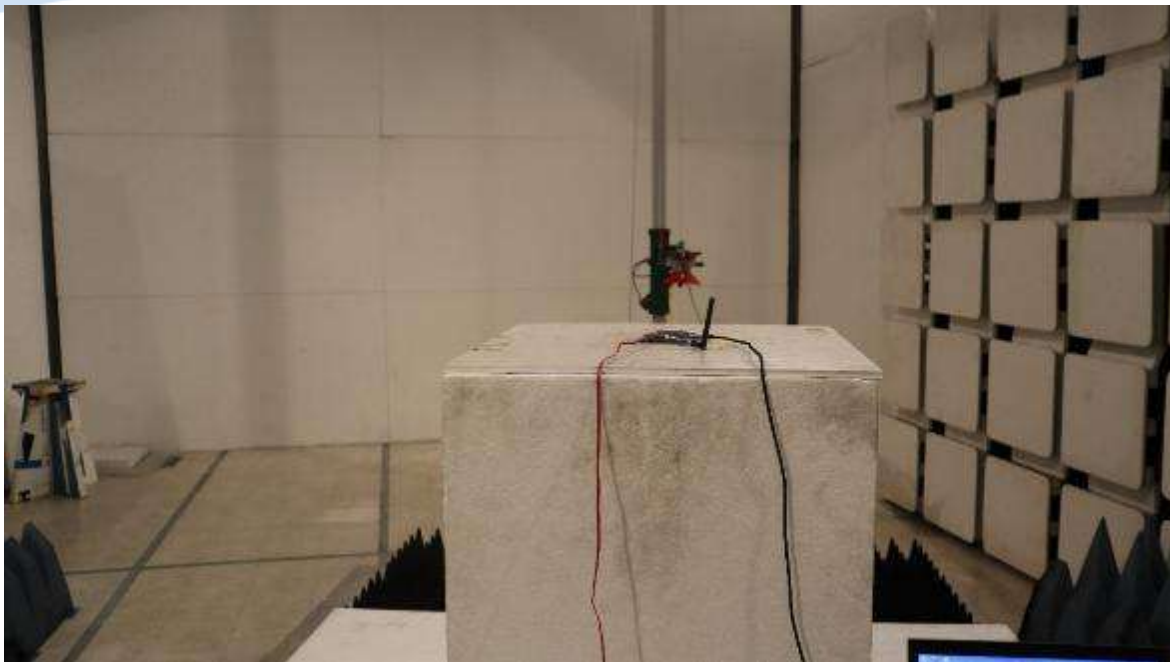


Dipole A24-HASM-450 (2.4GHz) antenna used, Vertical Back View

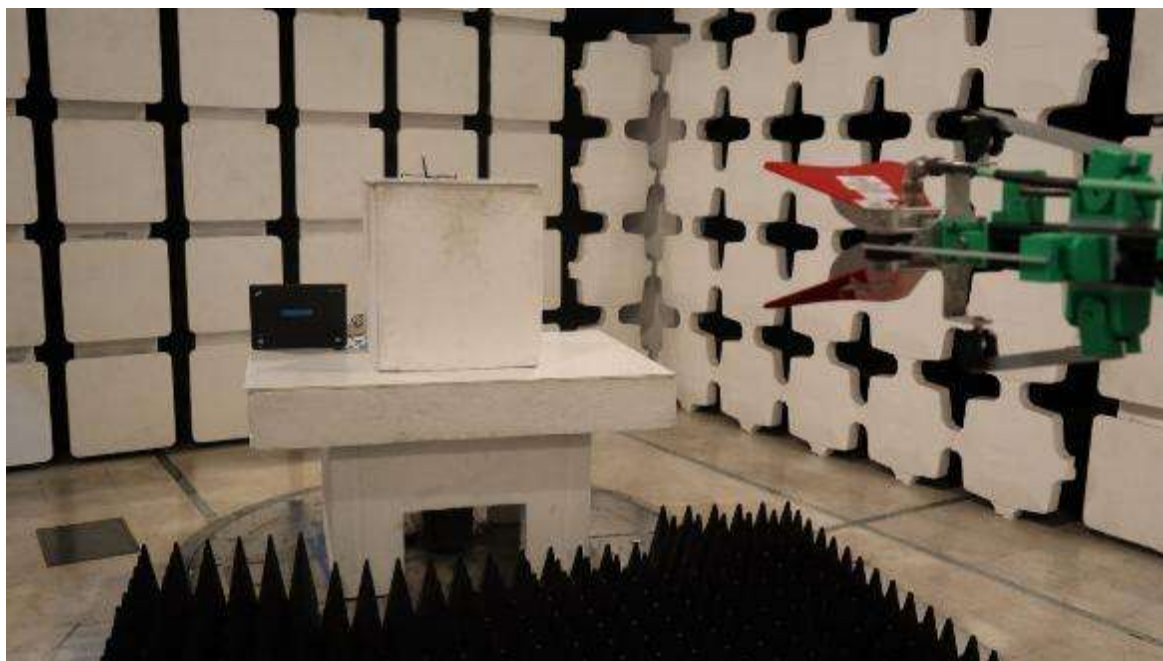


Dipole A24-HASM-450 (2.4GHz) antenna used, Vertical Front View

B.2.3 Omni / L-com HG2415U-PRO

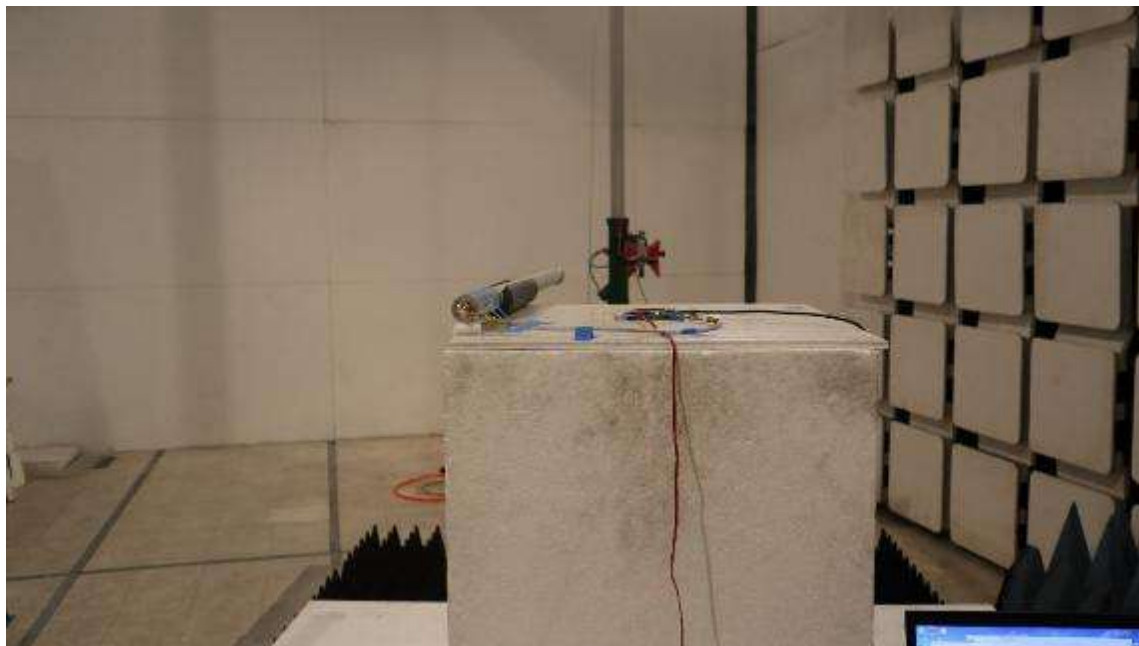


Omni HG2415U-PRO (2.4GHz) antenna used, Horizontal Back View

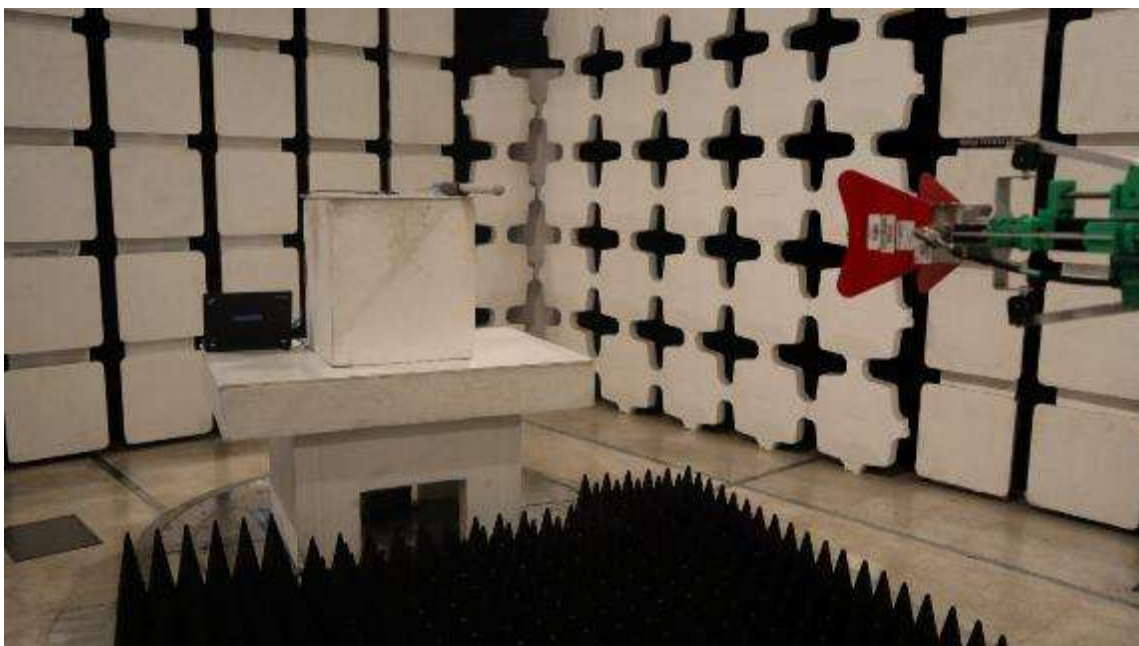

Omni HG2415U-PRO (2.4GHz) antenna used, Horizontal Front View



Omni HG2415U-PRO (2.4GHz) antenna used, Vertical Back View

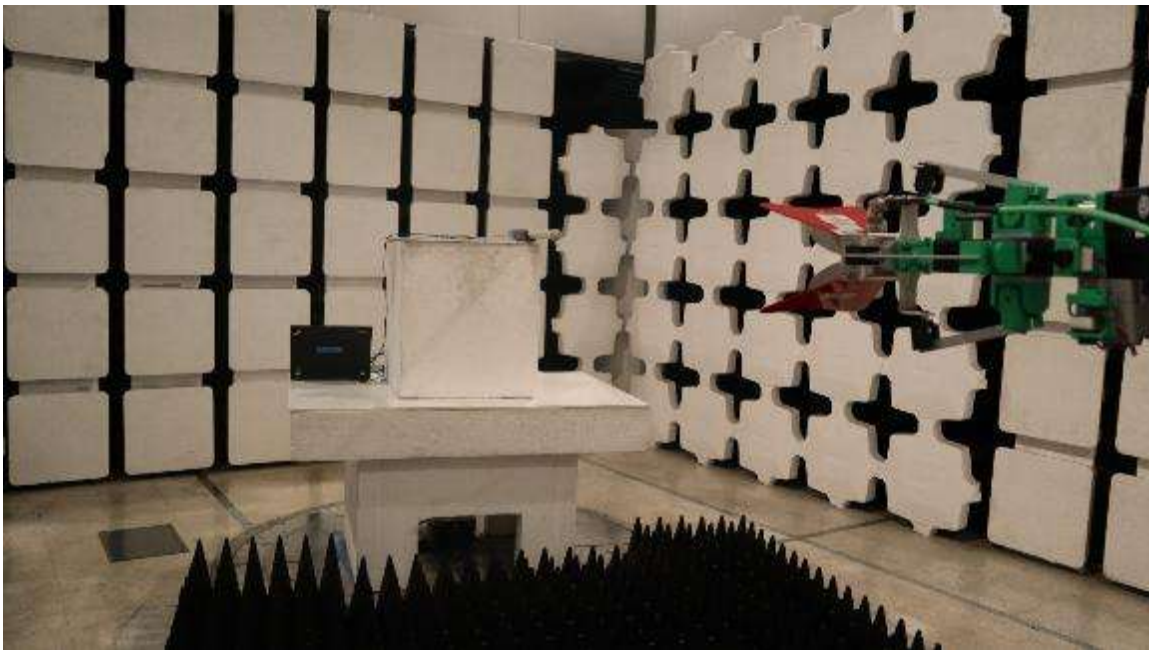


Omni HG2415U-PRO (2.4GHz) antenna used, Vertical Front View

B.2.4 Panel / Antaira Tech ANT-PA-2419




Panel ANT-PA-2419 (2.4 GHz) antenna used, Horizontal Back View

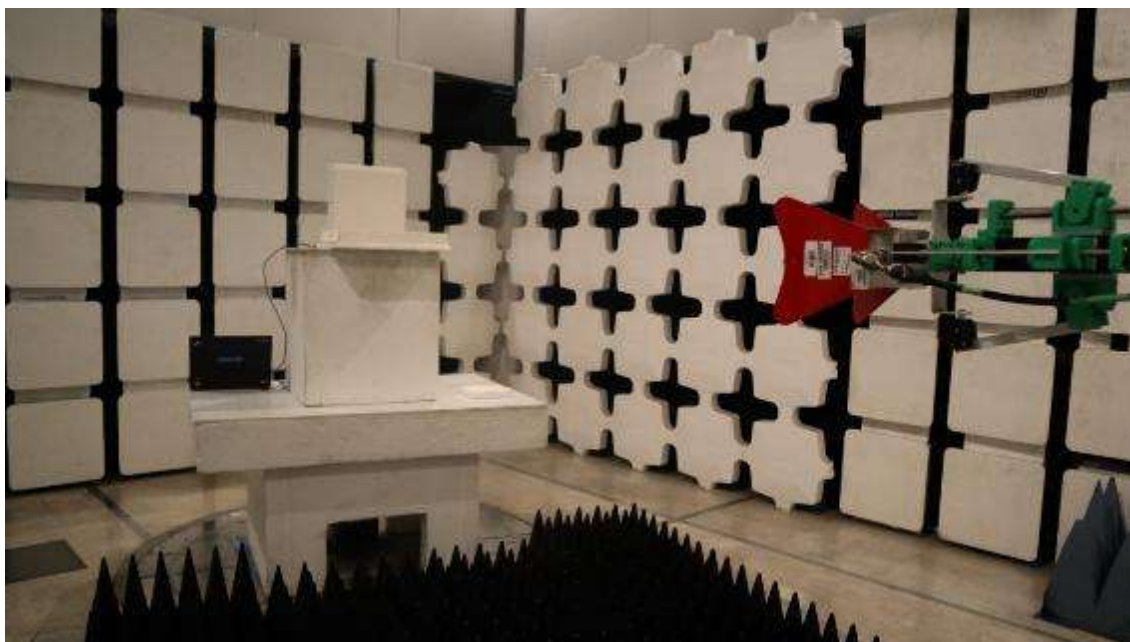

Panel ANT-PA-2419 (2.4 GHz) antenna used, Horizontal Front View




Panel ANT-PA-2419 (2.4 GHz) antenna used, Vertical Back View

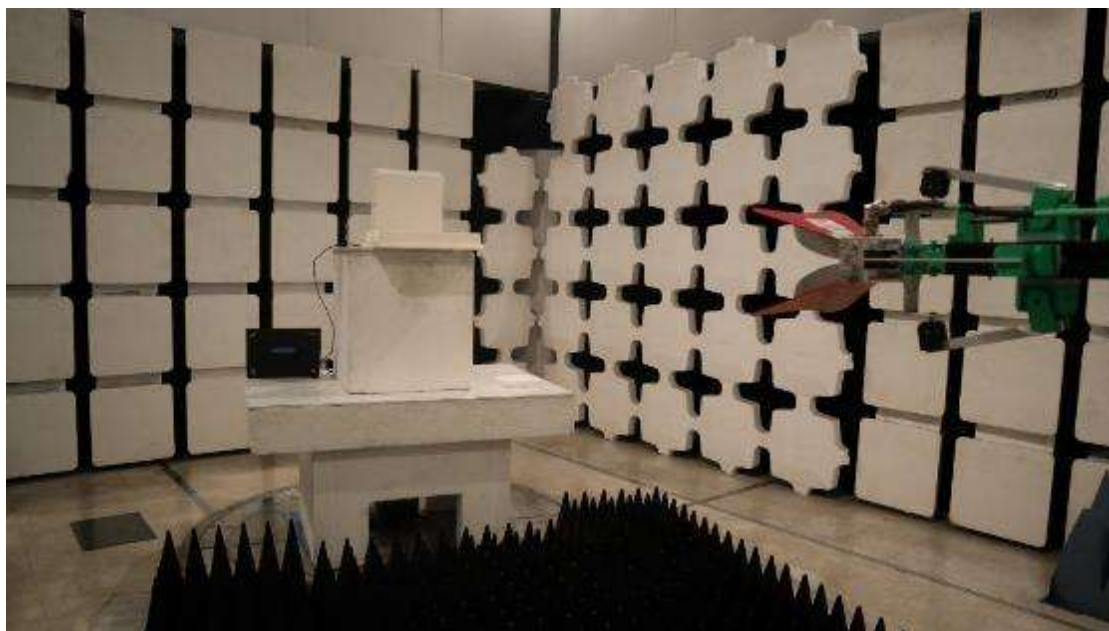


Panel ANT-PA-2419 (2.4 GHz) antenna used, Vertical Front View


B.2.5 Flex / TAOGLAS FXP74.07.0100A

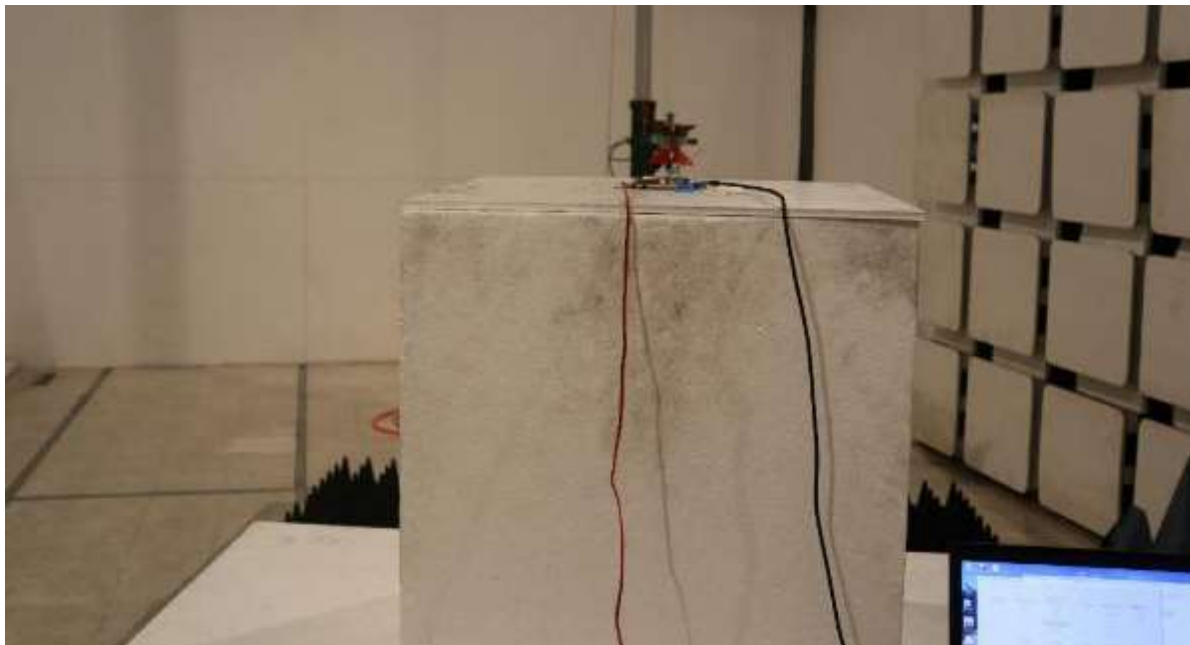


Panel TAOGLAS FXP74.07.0100A (2.4 GHz) antenna used, Vertical Back View

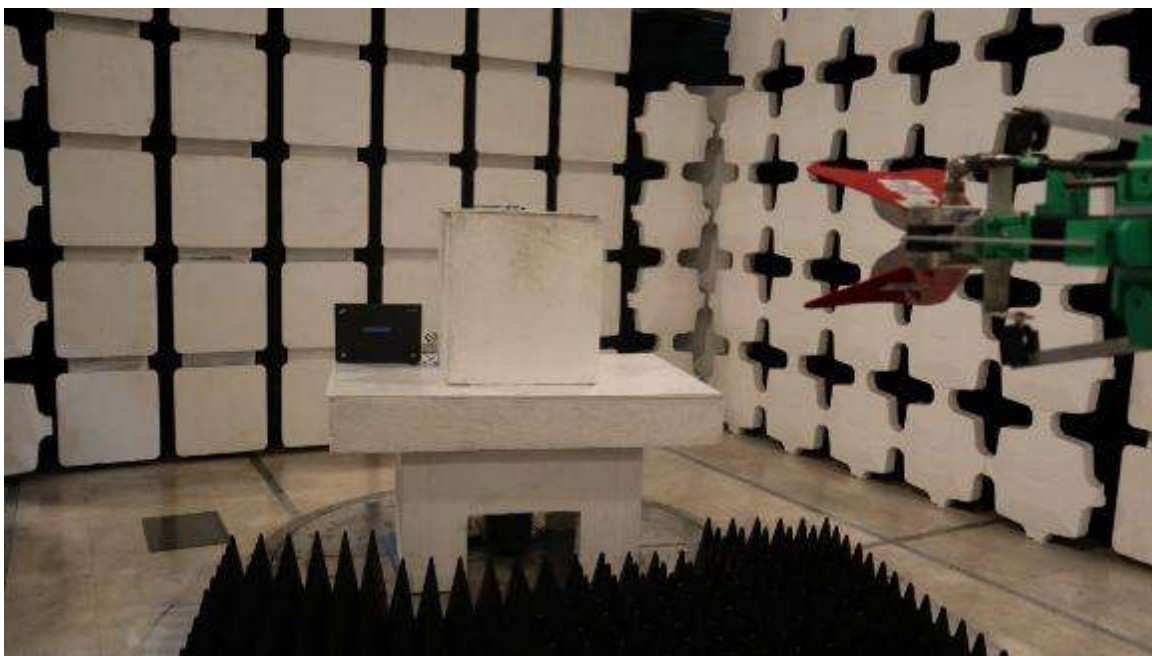

Panel TAOGLAS FXP74.07.0100A (2.4 GHz) antenna used, Vertical Front View

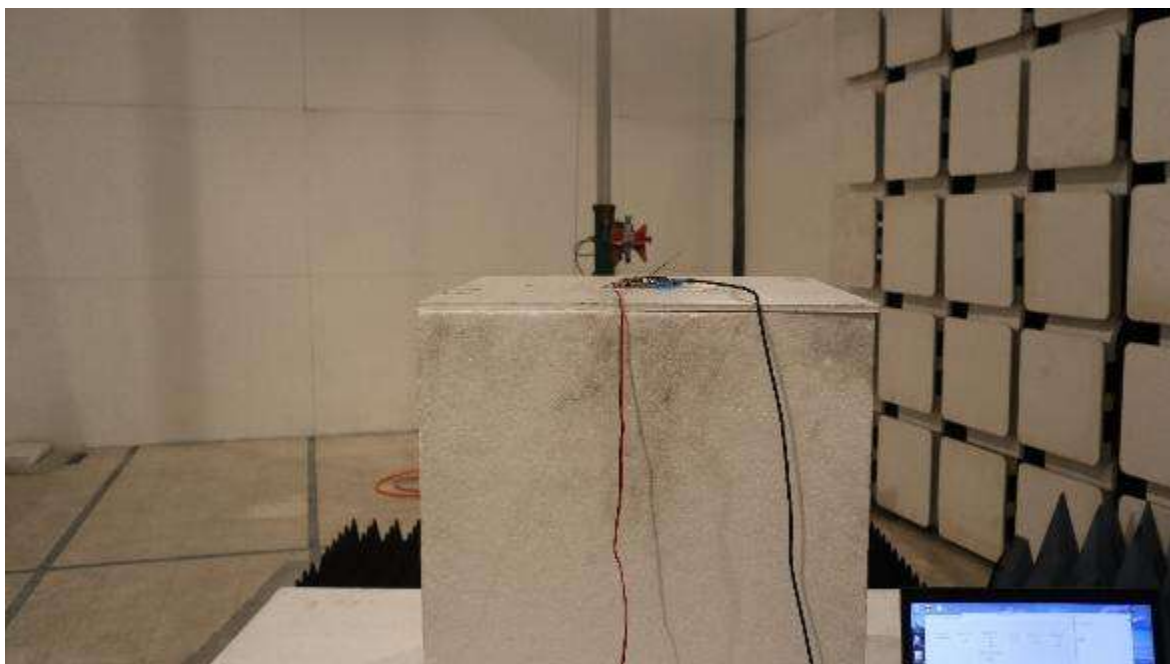


Panel TAOGLAS FXP74.07.0100A (2.4 GHz) antenna used, Horizontal Back View

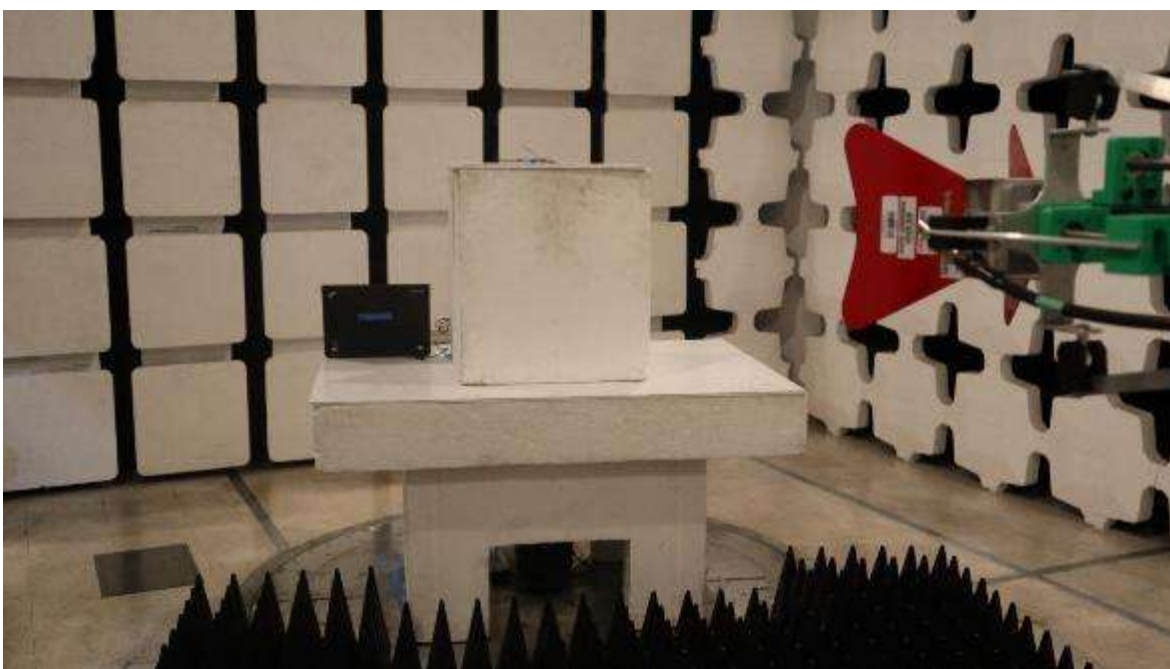


Panel TAOGLAS FXP74.07.0100A (2.4 GHz) antenna used, Horizontal Front View


B.2.6 Yagi / TECHTOO STKA-YA24-18SM

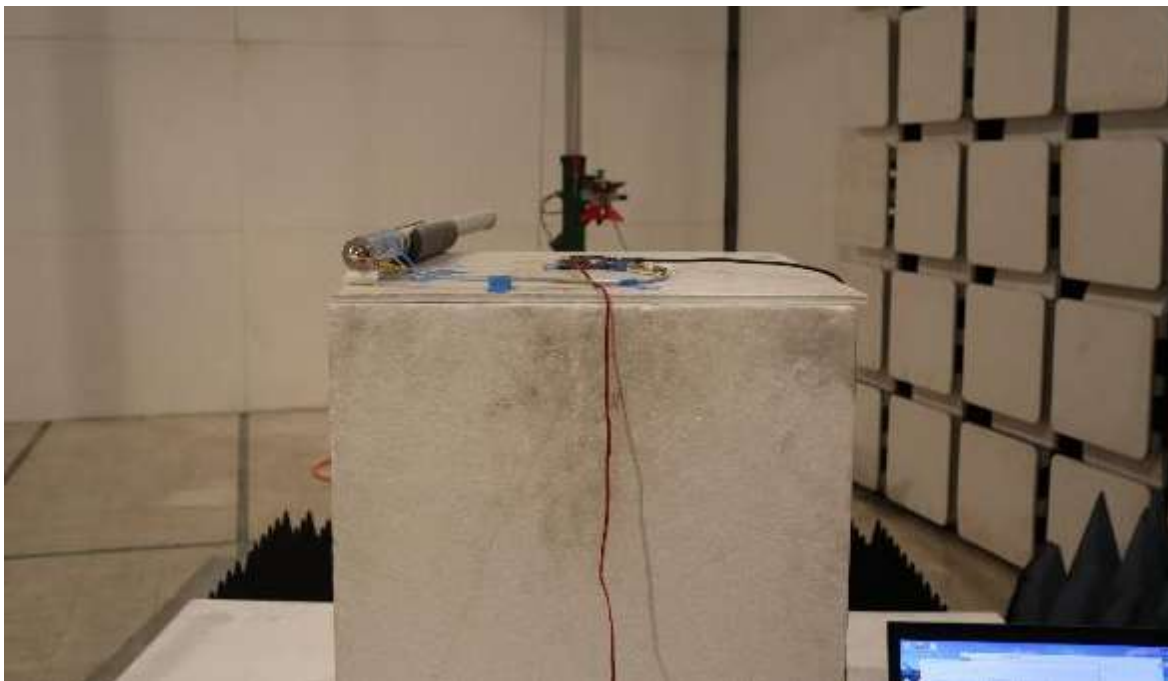


Yagi / TECHTOO STKA-YA24-18SM (2.4 GHz) antenna used, Vertical Back View

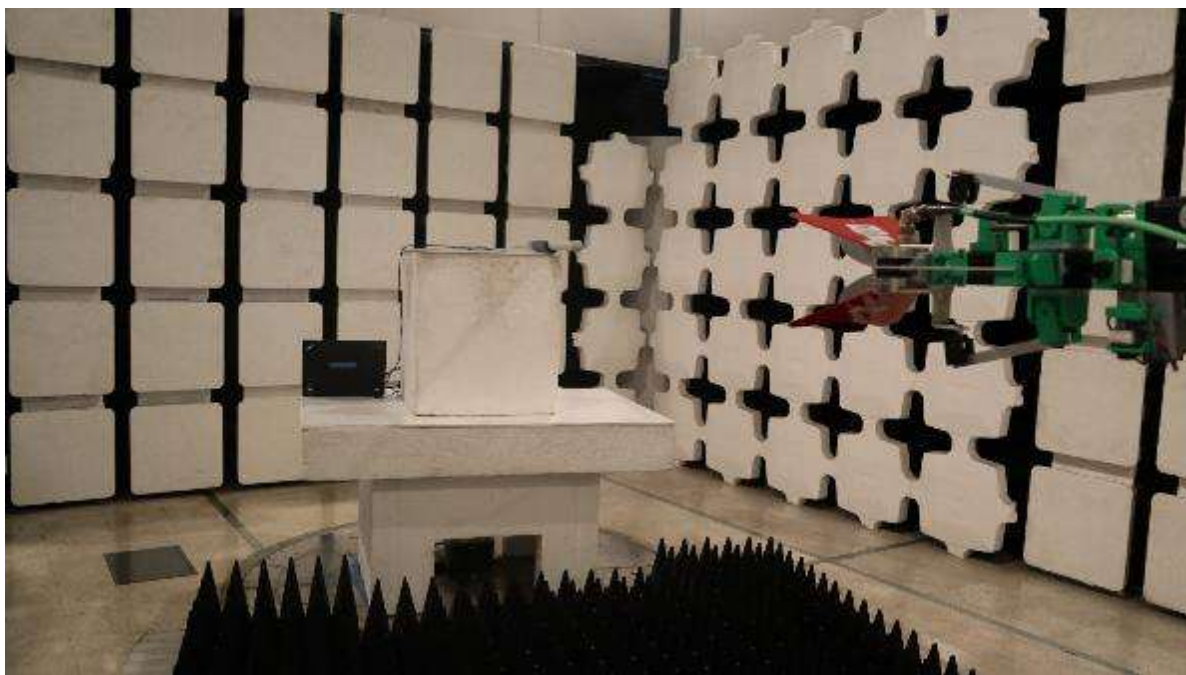

Yagi / TECHTOO STKA-YA24-18SM (2.4 GHz) antenna used, Vertical Front View

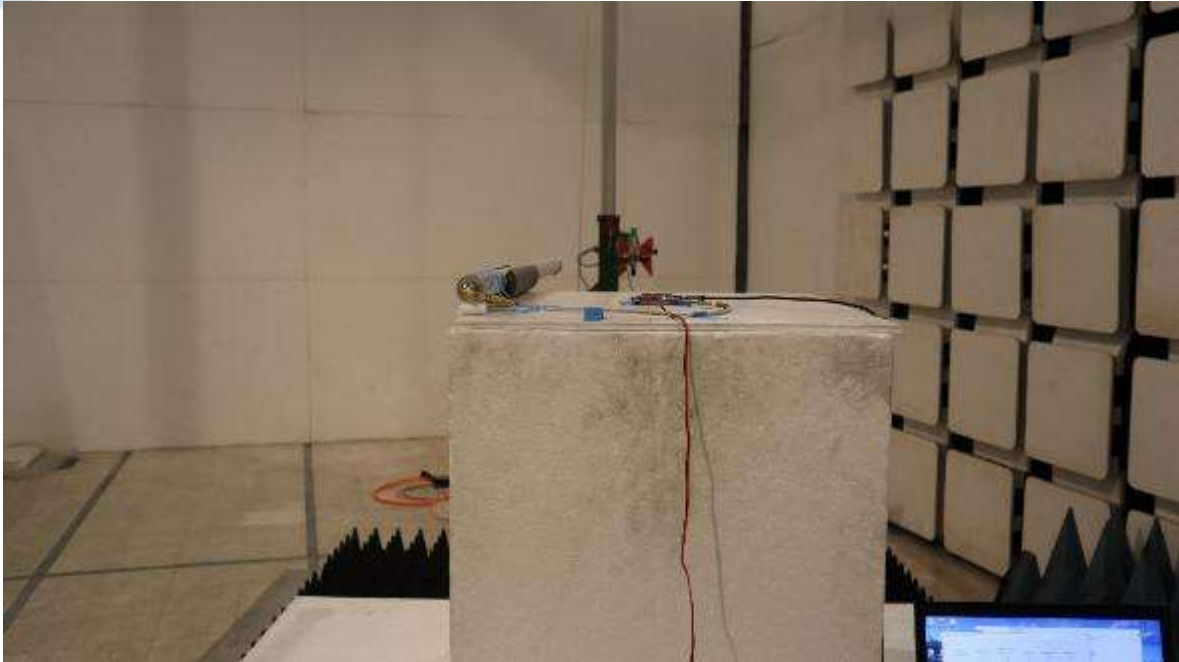

Yagi / TECHTOO STKA-YA24-18SM (2.4 GHz) antenna used, Horizontal Back View

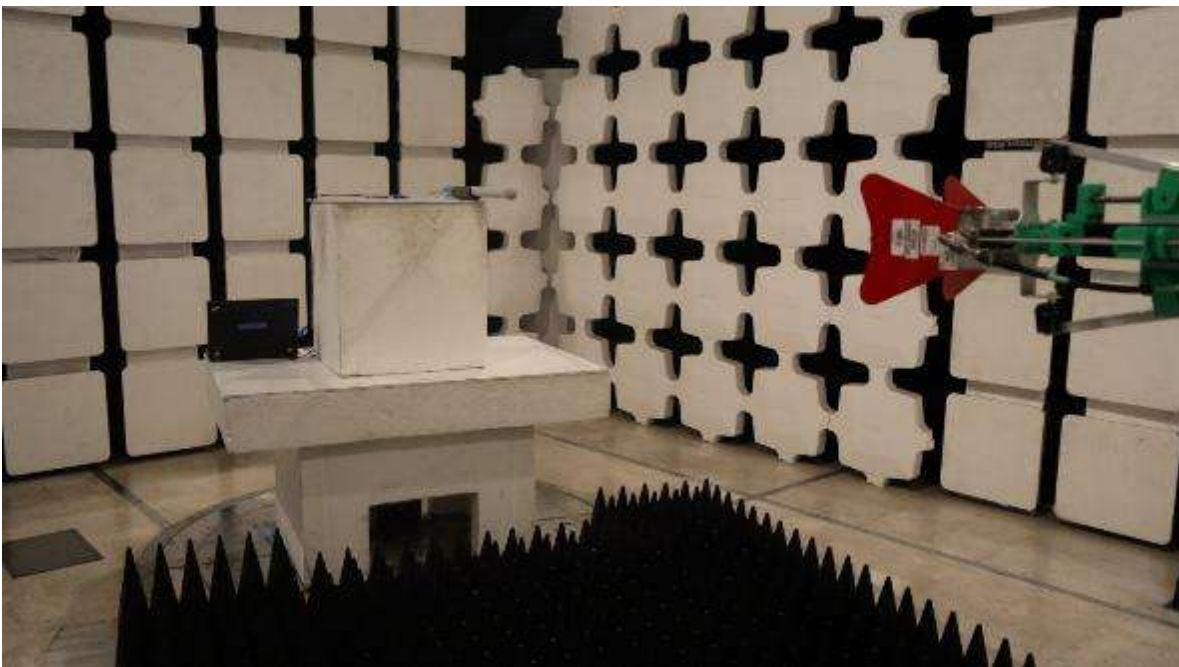

Yagi / TECHTOO STKA-YA24-18SM (2.4 GHz) antenna used, Horizontal Front View

APPENDIX C – DECLARATION OF SIMILARITY



DIGI INTERNATIONAL
9350 Excelsior Blvd, Suite 700
Hopkins, MN 55343
953-912-3444 / 877-812-3444
www.digi.com

Letter of Similarity

Date: 22 January 2026

FCC ID: MCQ-XB3P9XR
IC: 1846A-XB3P9XR
Model Name: XB3P9XR
Model Number (HVIN): XB3P-9XR-CMS-001, XB3P-9XR-RMS-001, XB3P-9XR-RUS-001, XB3P-9XR-UMS-001, XB3P-9XR-UUS-001

The differences between the above-mentioned product versions are outlined below.

These parts are identical except for the antenna connections. The part that was tested was the XB3P-9XR-UUS-001. The different antenna configurations are described below.

Part Number	Sub-gig connection	2.4 GHz connection
XB3P-9XR-UUS-001	u.fl	u.fl
XB3P-9XR-CMS-001	Chip antenna	SMT metal antenna
XB3P-9XR-RMS-001	RF pad	SMT metal antenna
XB3P-9XR-RUS-001	RF pad	u.fl
XB3P-9XR-UMS-001	u.fl	SMT metal antenna

For the sub-gig connection, a jumper is placed to route the RF signal to the u.fl connector, the chip antenna circuit or a pad that is soldered to the carrier PCB.

For the 2.4 GHz connection, a jumper is placed to route the RF signal to a surface mount metal antenna or a u.fl connector.

The remaining circuitry on these modules is identical.

Regards,

Paul Dahl

Paul Dahl
Sr. Manager of Engineering
Digi International Inc.



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com