

Marstech Limited

11 Kelfield Street, Etobicoke, Ontario, Canada, M9W 5A1
Telephone (416) 246-1116, Fax (416) 246-1020

Authorized by:
Professional Engineers
Ontario





Engineering &
Administrative



Testing For FCC
Submissions/Verifications

Approved Test Facility



REVISED TEST REPORT		
REPORT DATE:	16 October 2001	
	REPORT NO: 21360D	
CONTENTS:	See Table of Contents	
SUBMITTOR:	ABACOM Technologies 32 Blair Athol Crescent Etobicoke, Ontario M9A 1X5 CANADA	
SUBJECT:	Model No:	LWCSD
	FCC ID:	MEF-LWCSD
TEST SPECIFICATION	FCC 47 CFR Part 15 Sections: 15.35, 15.109, 15.209 and 15.249 NOTE: Tests Conducted Are "Type" Tests.	
DATE SAMPLE RECEIVED:	02 October 2001	DATE TESTED: 10 October 2001
RESULTS:	Equipment tested complies with referenced specification.	
ALTERATIONS:	None	
Tested by:		
	Edward Chang	Approved by: Robert G. Marshall, P. Eng. Date: R. G. MARSHALL Oct 23/01
THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF MARSTECH LIMITED. This report was prepared by Marstech Limited for the account of the "Submittor". The material in it reflects Marstech's judgement in light of the information available to it at the time of preparation. Any use which a Third Party makes of this report, or any reliance on decisions to be made based on it, are the responsibility of such Third Parties. Marstech accepts no responsibility for damages, if any, suffered by any Third Party as a result of decisions made or actions based on this report.		

TECHNICAL REPORT - FCC 2.1033(b)

Applicant and Manufacturer

ABACOM Technologies
32 Blair Athol Crescent
Etobicoke, Ontario
M9A 1X5 CANADA

FCC Identifier

MEF-LWCSD

TABLE OF CONTENTS

<u>Exhibit</u>	<u>Description</u>	<u>FCC Ref.</u>	<u>Page</u>
A	Installation and Operating Instructions Furnished to the User.	2.1033(b)(3)	Exhibit A Exhibit A-1
B	Description of Circuit Functions	2.1033(b)(4)	Exhibit B Exhibit B-1
C	Block Diagram Schematic Diagram	2.1033(b)(5)	Exhibit C Exhibit C(1) Exhibit C(2)
D	Report of Measurements	2.1033(b)(6)	Exhibit D(1) to D(3)
E	Photographs Label Equipment	2.1033(b)(7)	Exhibit E Exhibit E(1)-1 Exhibit E(2)-1 to -9

EXHIBIT D

[FCC Ref. 2.1033(b)(6)]

"Report of Measurements"

TABLE OF CONTENTS

TEST REPORT CONTAINING:

Exhibit D(1)-2	Product Description
Exhibit D(1)-3 to -4	Test Equipment List
Exhibit D(1)-5	Test Procedure
Exhibit D(1)-6 to -7	Bandwidth
Exhibit D(1)-8	Field Strength of Emissions
Exhibit D(1)-9	Field Strength of the Carrier
Exhibit D(1)-10	Field Strength of Harmonics Including Notes RE: 15.35(b) and 15.35(c)
Exhibit D(1)-11 to -15	Pulse Train Measurements and Calculations
Exhibit D(2)	Test Setup Photo
Exhibit D(3)	Measurement Facility (3 meter site)

PRODUCT DESCRIPTION

The Model LWCSO is a wireless radio controlled sequential lighting system operating at 916.5MHz, for the purpose of directing traffic in road construction zones. The antennae used for transmitter and receiver are permanently attached to the EUT.

TEST FACILITY AND EQUIPMENT LIST

FACILITIES

Radiated ANSI C63.4 (FCC OET/55) open field 3 metre test range. This test range is protected from the cold and moisture by a non-conductive enclosure.

EQUIPMENT

Anritsu 2601A Spectrum Analyzer
Advantest R3261A Spectrum Analyzer
Hewlett-Packard RF generator # 8640 B with an 002 doubler
A.H. Systems biconical antenna; 20 MHz to 330 MHz
A.H. Systems log periodic antenna; 300 MHz to 1.8 GHz
Eaton dipole antennas; T1, T2, T3 25 MHz to 1.0 GHz
Roberts dipole antennas; T1, T2, T3 & T4 25 MHz to 1.0 GHz
Compliance Design P950 Preamp (16 dB) ... 25 MHz to 1.0 GHz

NOTE:

The Anritsu 2601A Spectrum Analyzer and the Advantest R3261A Spectrum Analyzer are calibrated annually, and that calibration is directly traceable to the National Research Council of Canada. (NRC)
This equipment is only used by qualified technicians and only for the purpose of EMI measurements.
The three metre test range has been carefully evaluated to the ANSI document C63.4 and will be remeasured for reflections and losses every three years.

ADDITIONAL TEST EQUIPMENT LIST

1. Spectrum Analyzer: HP 8591EM, S/N 3639A00995, Calibrated April 2001
2. Spectrum Analyzer: ANRITSU 2601A, S/N MT64544, Calibrated May 2001
3. Spectrum Analyzer: IFR AN940, S/N 635001039, Calibrated March 2001
4. Preamp: HP 8449B, S/N 3008A00378, Calibrated August 2001
5. Horn Antenna: Q-PAR 6878/24, S/N 1721, 1.5-18GHz
6. Line Impedance Stabilization Network.: Marstech, Cal. July 2001

TEST PROCEDURE

GENERAL:

A test program was run which simulated a normal transmission.

BANDWIDTH 20dB:

The measurements were made with the spectrum analyzer's resolution bandwidth (RBW)=100KHz and the video bandwidth (VBW)=1.0MHz and the span set as shown on the plot.

POWER OUTPUT:

The radiated output power was measured, with the spectrum analyzer and Dipole Antenna, in the test mode which simulated normal operation. The harmonics were measured with a Horn Antenna.

RADIATION INTERFERENCE:

The test procedure used was ANSI STANDARD C63.4-1992 using an appropriate spectrum analyzer, as listed in the Test Equipment List. The bandwidth (RBW) of the spectrum analyzer was 100KHz/120KHz up to 1GHz with an appropriate sweep speed. The RBW above 1.0GHz was = 1MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the EUT was 24°F with a humidity of 60%. The EUT was tested from 30MHz to 10GHz.

BANDWIDTH

The 20dB bandwidth is 445KHz [refer to D(1)-7] which is less than the limit .25% of 916MHz = 3664KHz.

20dB BANDWIDTH ABACOM, MODEL LWCSO

15:32:10 OCT 11, 2001
/P


MARKER Δ
445 kHz
.07 dB

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKRΔ 445 kHz
.07 dB

LOG REF 79.0 dBμV

10
dB/
#ATTN
0 dB

WA SB
SC FS
CORR

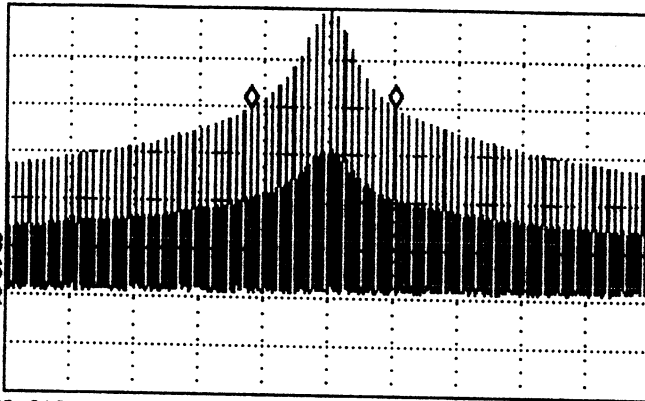

CENTER 916.455 MHz SPAN 2.000 MHz
IF BW 120 kHz #AVG BW 1 MHz #SWP 100 sec

15.249**FIELD STRENGTH OF EMISSIONS****Requirements:**

<u>Field Strength of Fundamental</u>	<u>Field Strength of Harmonics</u>	<u>S15.209</u>
902 to 928MHz	54dB μ V/m @ 3m Avg	30-88MHz 40 dB μ V/m@ 3m
94dB μ V	74dB μ V/m @ 3m Peak	88-216MHz 43.5
		216-960 MHz 46
		Above 960 MHz 54

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in 15.209, whichever is the lesser attenuation.

Emissions that fall in the restricted bands (15.205) must be less than 54dB μ V/m

ABACOM, MODEL LWCS D**CARRIER RADIATED EMISSION RESULTS****Test Data:**

Emission Frequency MHZ	Meter Reading @3m dB μ V	Antenna	Cable and ACF dB	Field Strength dB μ V/M	FCC Limit dB μ V/M	Margin dB	Detector & BW KHz
916.50	52.52	RT4 V	33.6	86.12	94	-7.88	PK 100

ABACOM, MODEL LWCSD**HARMONIC EMISSIONS**


Frequency Band MHz	Meter Reading @3m (dB μ V)	Antenna	Cable & ACF (dB)	Peak F. S. (dB μ V/M)	Peak Limit 15.35(b) (dB μ V/M)	Pk/Av Ratio 15.35(c) (dB)	Average Corrected F.S. (dB μ V/M)	Average FCC Limit (dB μ V/M)	Margin dB	Detector & BW KHz
1833.10	32.92	Horn V	33.11	66.02	74	-12.37	53.65	54	0.35	PK 1000
2749.50	13.03	Horn V	34.01	47.04	74	-12.37	34.67	54	19.33	PK 1000
3666.00	14.36	Horn V	35.49	49.85	74	-12.37	37.48	54	16.52	PK 1000
4582.50	13.72	Horn V	37.37	51.09	74	-12.37	38.72	54	15.28	PK 1000
5499.00	11.72	Horn V	39.42	51.15	74	-12.37	38.78	54	15.22	PK 1000

NOTES:

- (1) 15.35(b) allows a peak value of 20dB above the average value. The average value per 15.249(d) is $20 \log 500 = 54\text{dB}\mu\text{V/M}$ and the maximum peak value is $74\text{dB}\mu\text{V/M}$.
- (2) 15.35(c) allows averaging over one complete pulse train including the blanking interval. The Abacom, Model LWCSD has a measured pulse train of 24.068mS over a period of 100mS (refer to Exhibits D(1)-11, -12, -13, -14 and -15).

$$\text{The Peak to Average ratio is therefore } 20 \log \frac{24.068}{100} = 20 \log 0.24068 = -12.37\text{dB}$$


PULSE TRAIN (ON TIME) **ABACOM, MODEL LWCSO**

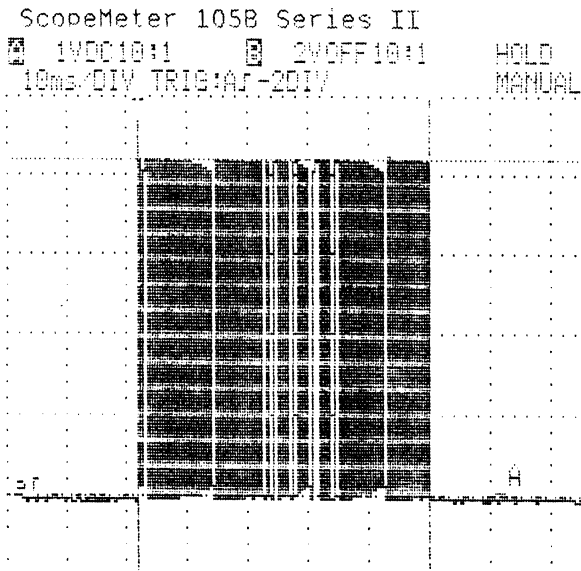

WaveForm A:

dt
480 ms


MORE RECURRENT ZERO Δ GLITCH CURSOR
 SCOPE SINGLE % DETECT READING

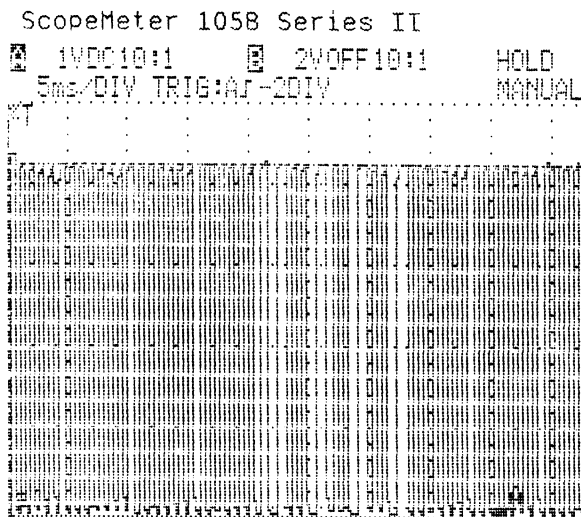

WaveForm A:

dt
478 ms

MORE RECURRENT ZERO Δ GLITCH CURSOR
 SCOPE SINGLE % DETECT READING

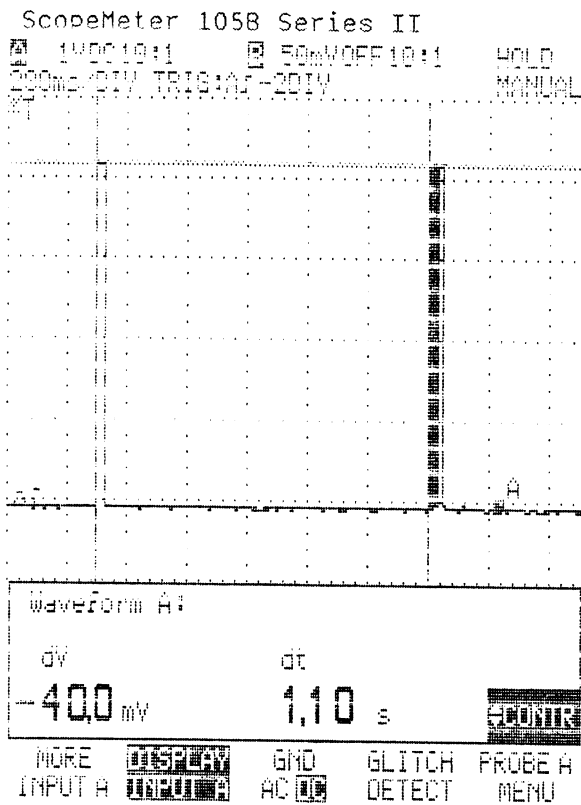

**TOTAL PERIOD
ABACOM, MODEL LWCSO**

15.35(c) CALCULATIONS

In accordance with the instruction from the FCC, the peak to average ratio was calculated as follows:

1. There are 48 short pulses (refer to D(1)-11) and there are 5 long pulses.

2. The short pulse on time is 0.416 mS (refer to D(1)-14).

3. The long pulse on time is 0.82 mS (refer to D(1)-15).


4. The total on time is $(48 \times 0.416 + 5 \times 0.82)$ mS

$$= (4.1 + 19.968) \text{ mS} = 24.068 \text{ mS}.$$

5. The peak to average ratio is $20 \log \frac{24.068}{100}$

$$= 20 \log 0.24068 = -12.37 \text{ dB}$$

ScopeMeter 105B Series II
1VDC10:1 2VOFF10:1
200us/DIV TRIG:AF-2DIV

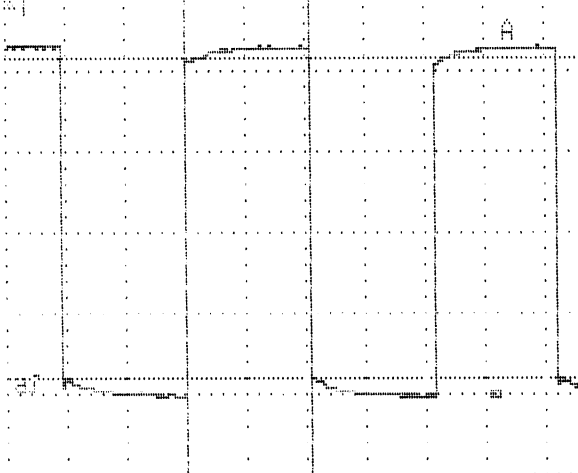


**SHORT PULSE ON TIME
ABACOM, MODEL LWCS D**

Waveform A:
dt
416 us
CONTR

MORE TRIGGER TV -SLOPE TIME DELAY ADJUST LEVEL


ScopeMeter 105B Series II
1VDC10:1 2VOFF10:1
200us/DIV TRIG:AF-2DIV

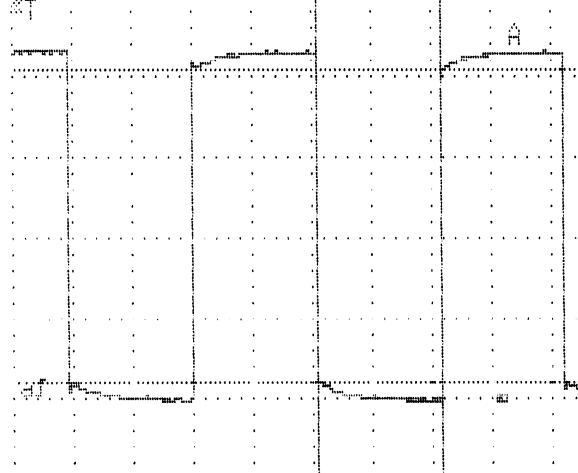



**SHORT PULSE OFF TIME
ABACOM, MODEL LWCS D**

Waveform A:
dt
416 us
CONTR

MORE TRIGGER TV -SLOPE TIME DELAY ADJUST LEVEL

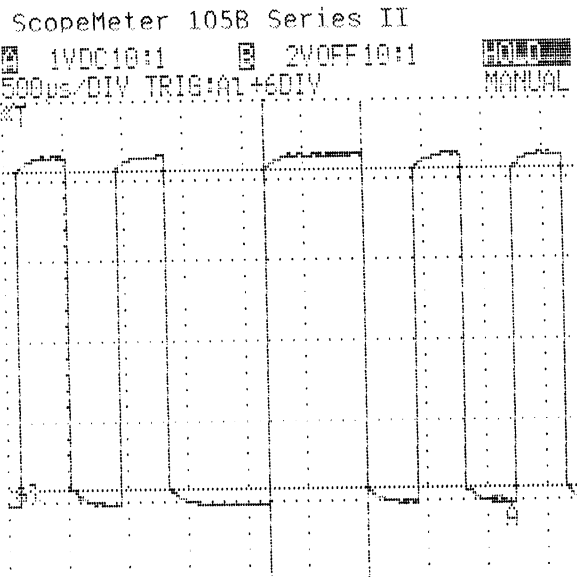

**LONG PULSE ON TIME
ABACOM, MODEL LWCSO**

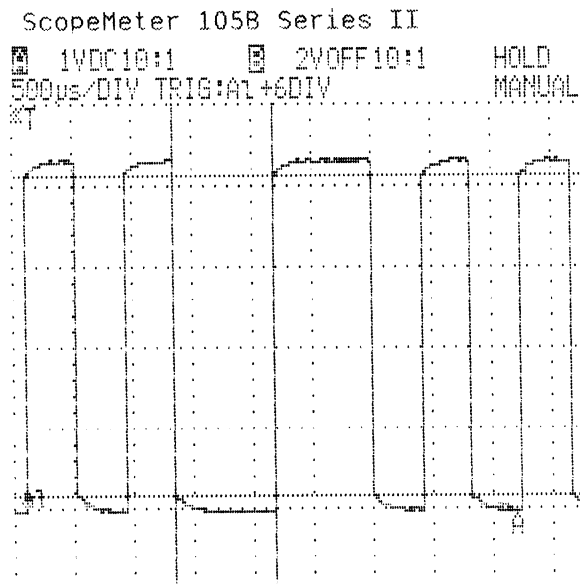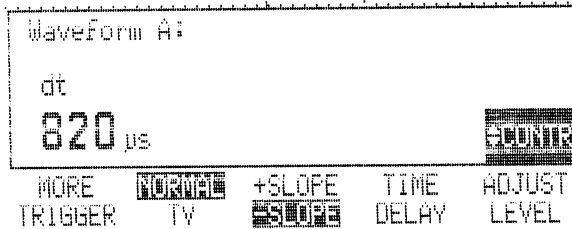

**LONG PULSE OFF TIME
ABACOM, MODEL LWCSO**

