




Ref Lvl	Delta 1 [T1]	RBW	1 MHz	RF Att	20 dB
92 dBμV	1.05 dB	VBW	3 MHz		
	1.963928 ms	SWT	20 ms	Unit	dBμV

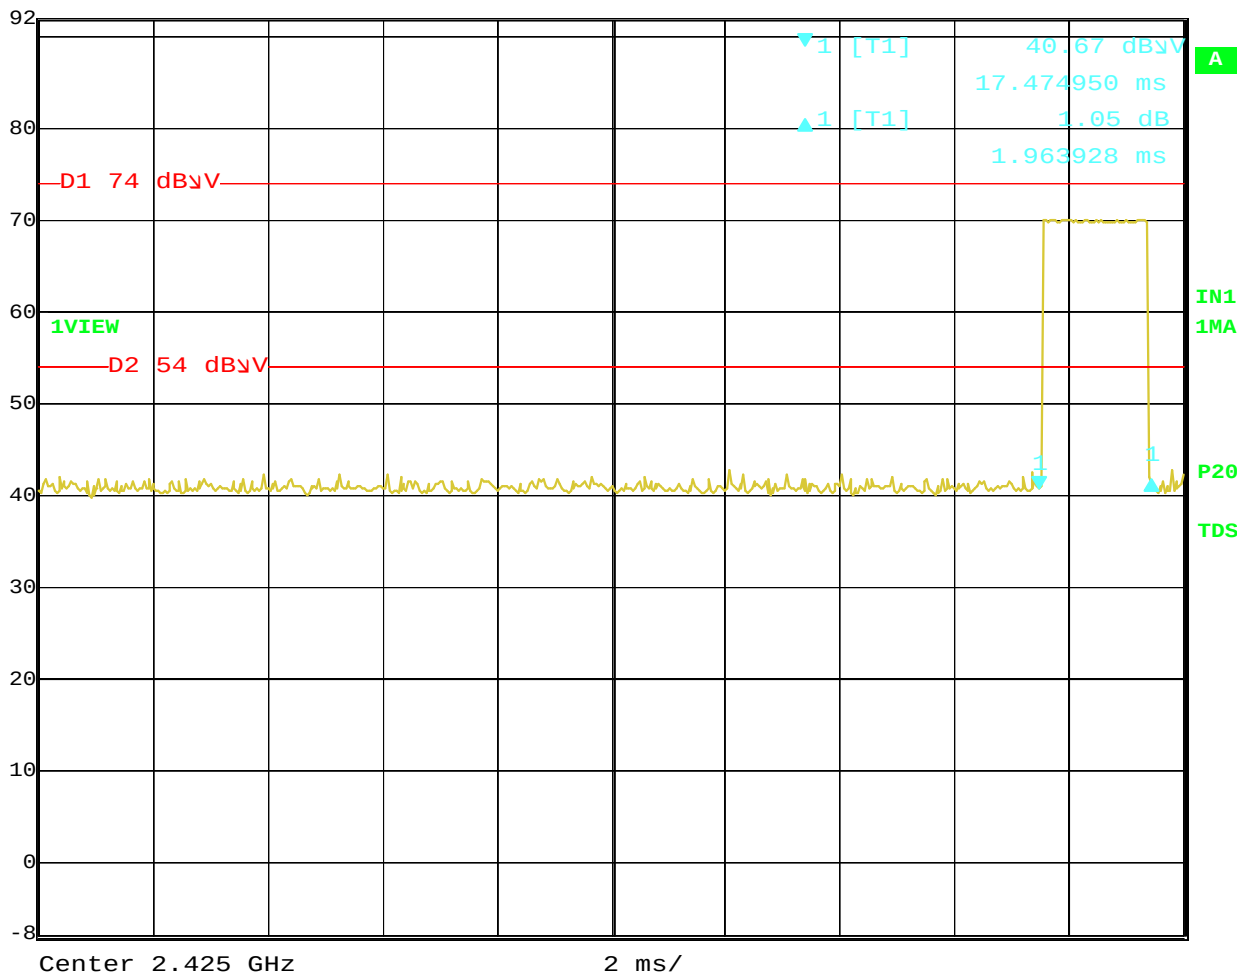


Date: 19.AUG.2014 07:50:35

Time of One Pulse – Advertising Mode



Ref Lvl 92 dBμV
Delta 1 [T1] -0.77 dB
400.801603 ms
RBW 1 MHz
VBW 3 MHz
SWT 1 s
RF Att 20 dB
Unit dBμV

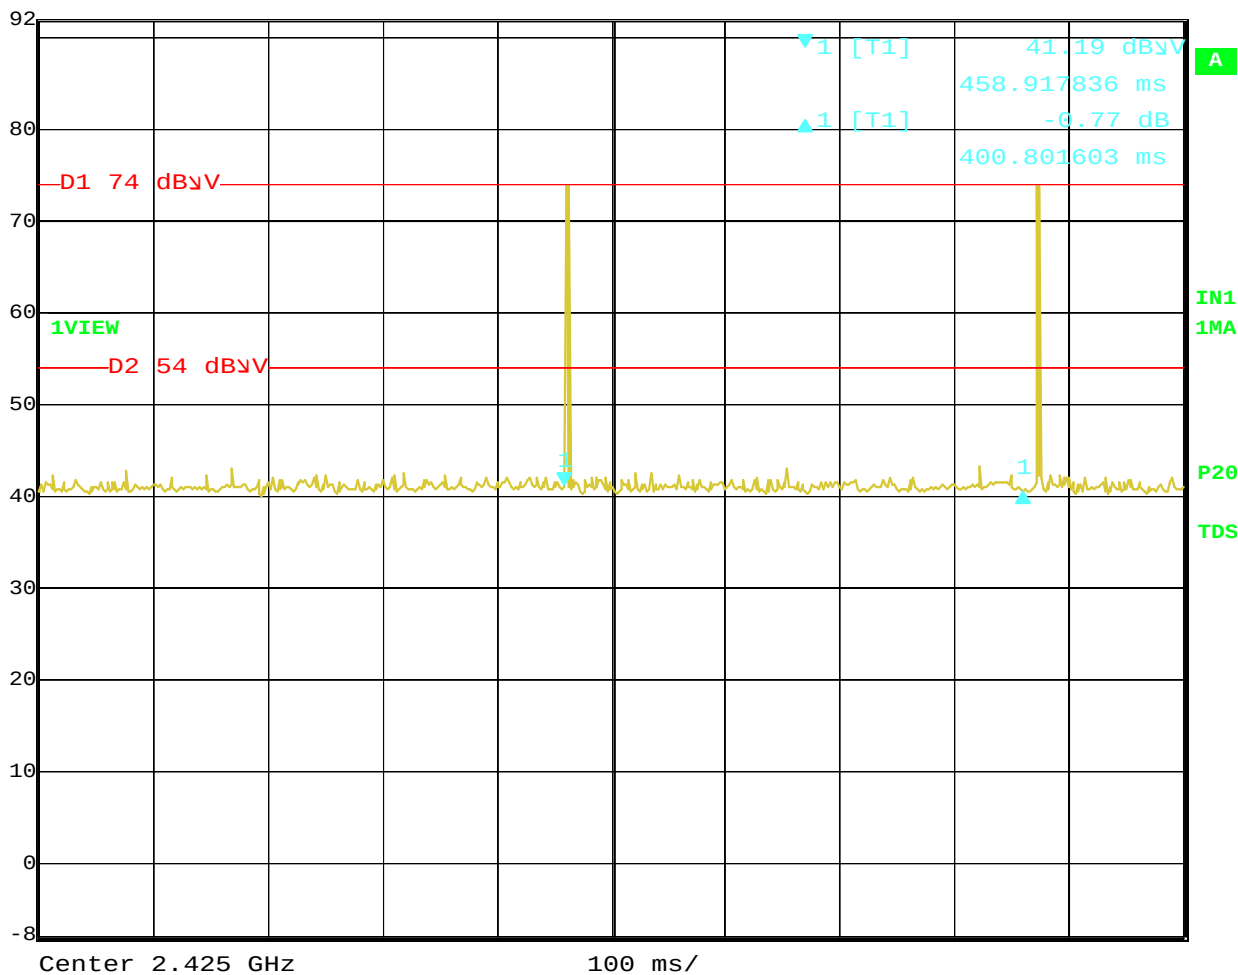


Date: 19.AUG.2014 07:49:44

Number of Pulses in Worst Case 100 ms Period – Advertising Mode
The duty cycle is less than 10%, thus the full 20 dB peak to average ratio is allowed.

$$\text{Duty Cycle} = 1.963928 \text{ ms} / 100 \text{ ms} = 1.963928\%$$



Ref Lvl 92 dBμV
Delta 1 [T1] -2.50 dB
1.082164 ms
RBW 1 MHz
VBW 3 MHz
SWT 10 ms
RF Att 20 dB
Unit dBμV

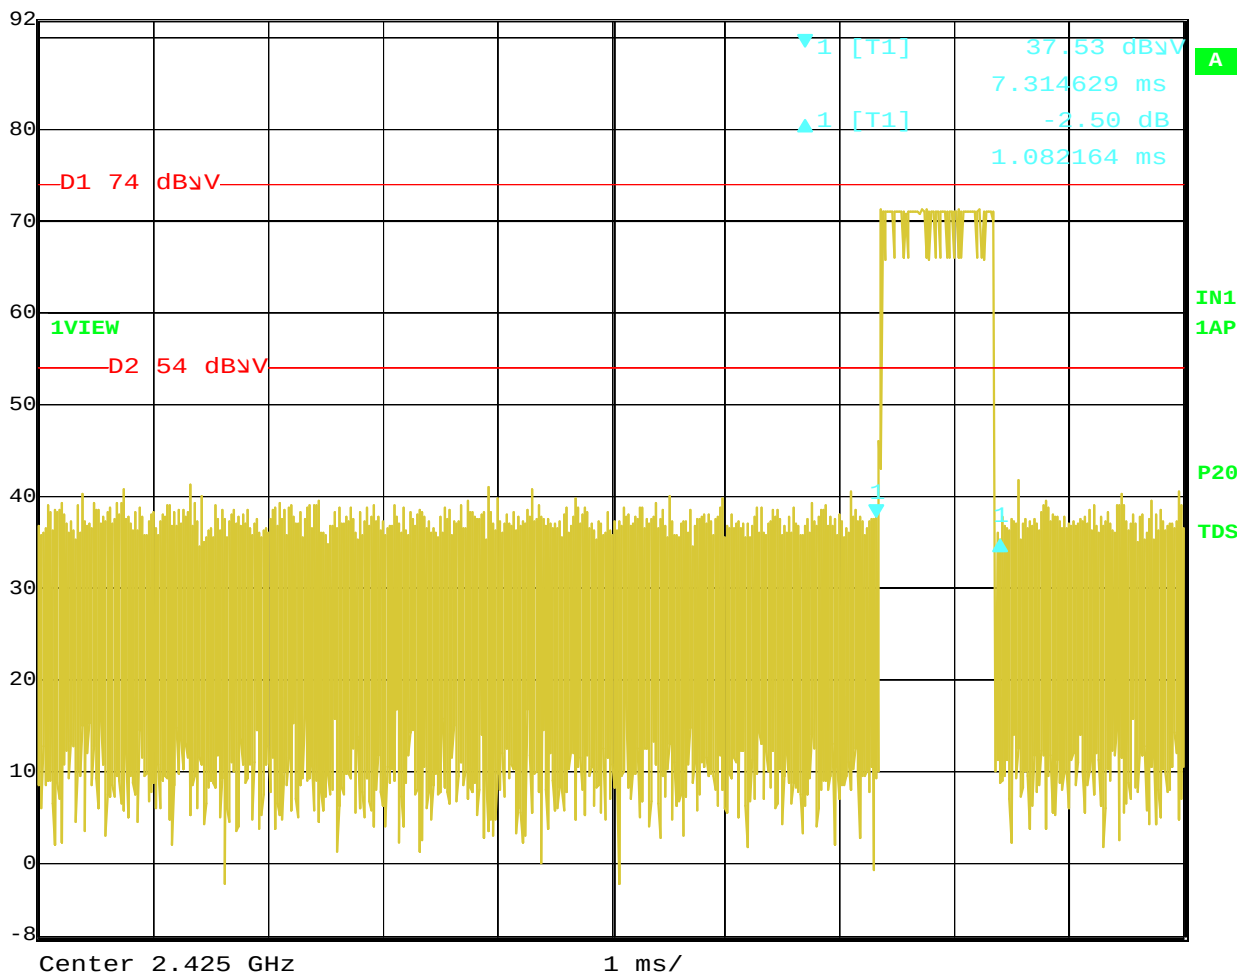


Date: 19.AUG.2014 07:45:35

Time of One Pulse – Pairing Mode



Ref Lvl 92 dBμV
Delta 1 [T1] -1.38 dB
101.402806 ms
RBW 1 MHz
VBW 3 MHz
SWT 200 ms
RF Att 20 dB
Unit dBμV

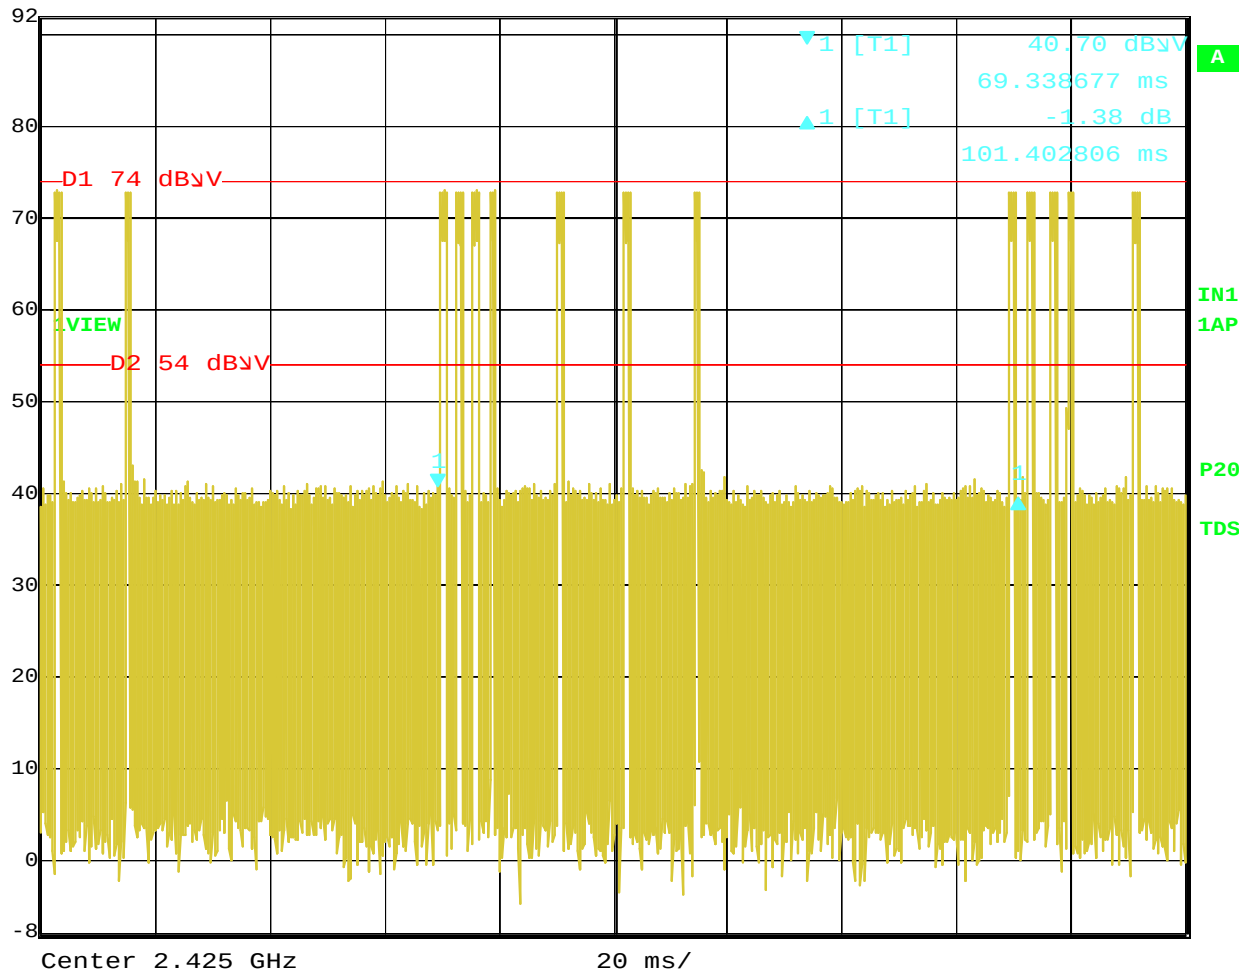

Date: 19.AUG.2014 07:40:36

Number of Pulses in Worst Case 100 ms Period – Pairing Mode
The duty cycle is less than 10%, thus the full 20 dB peak to average ratio is allowed.

$$\text{Duty Cycle} = (1.082164 \times 8) \text{ ms} / 100 \text{ ms} = 8.657312\%$$