




Ref Lvl 92 dBμV
Delta 1 [T1] 0.21 dB
3.206413 ms
RBW 1 MHz
VBW 3 MHz
SWT 200 ms
RF Att 10 dB
Unit dBμV

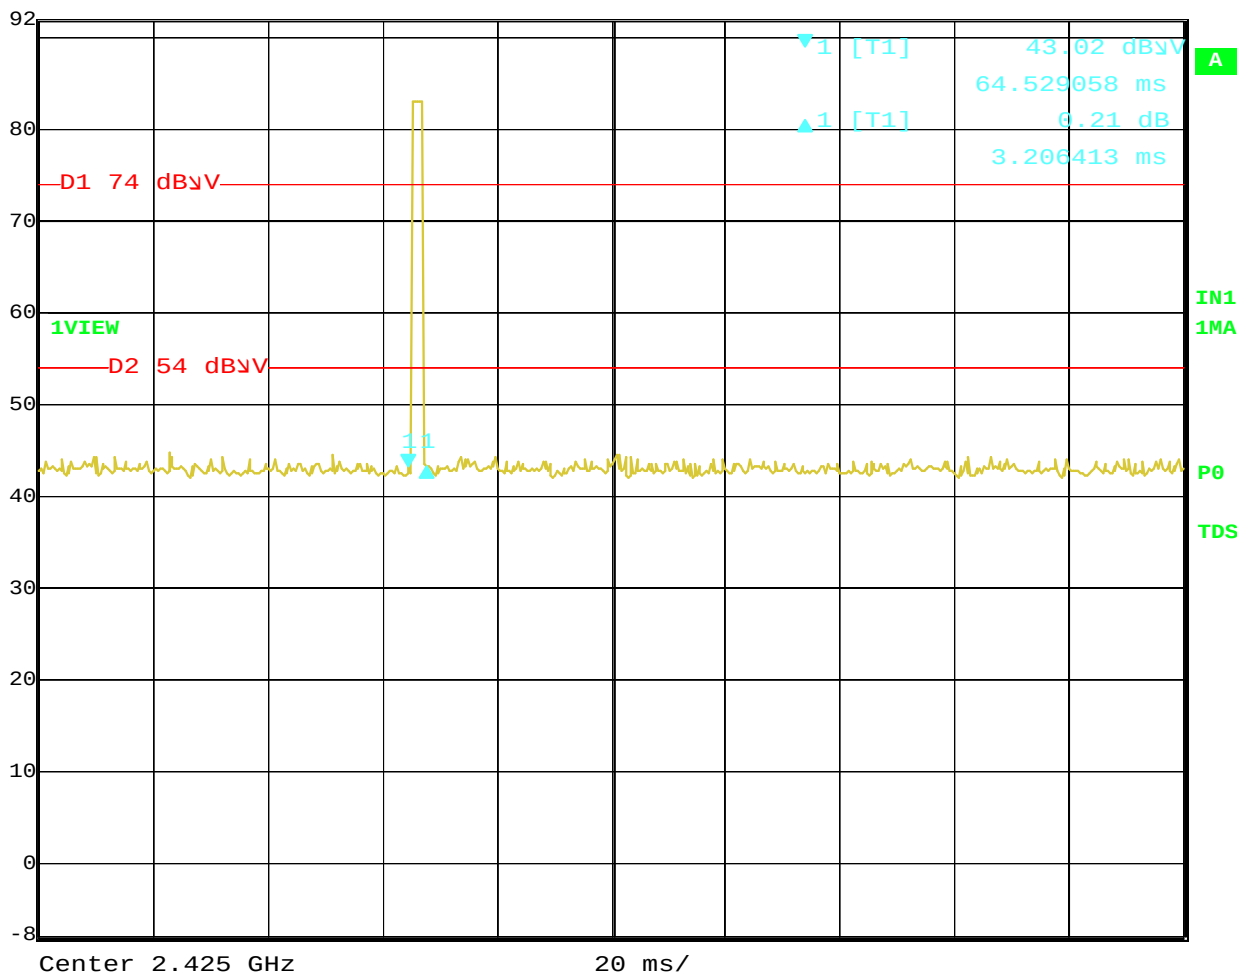


Date: 18.JUN.2014 07:49:02

Time of One Pulse – Advertising Mode



Ref Lvl 92 dBμV
Delta 1 [T1] -0.10 dB
412.825651 ms
RBW 1 MHz
VBW 3 MHz
SWT 1 s
RF Att 10 dB
Unit dBμV

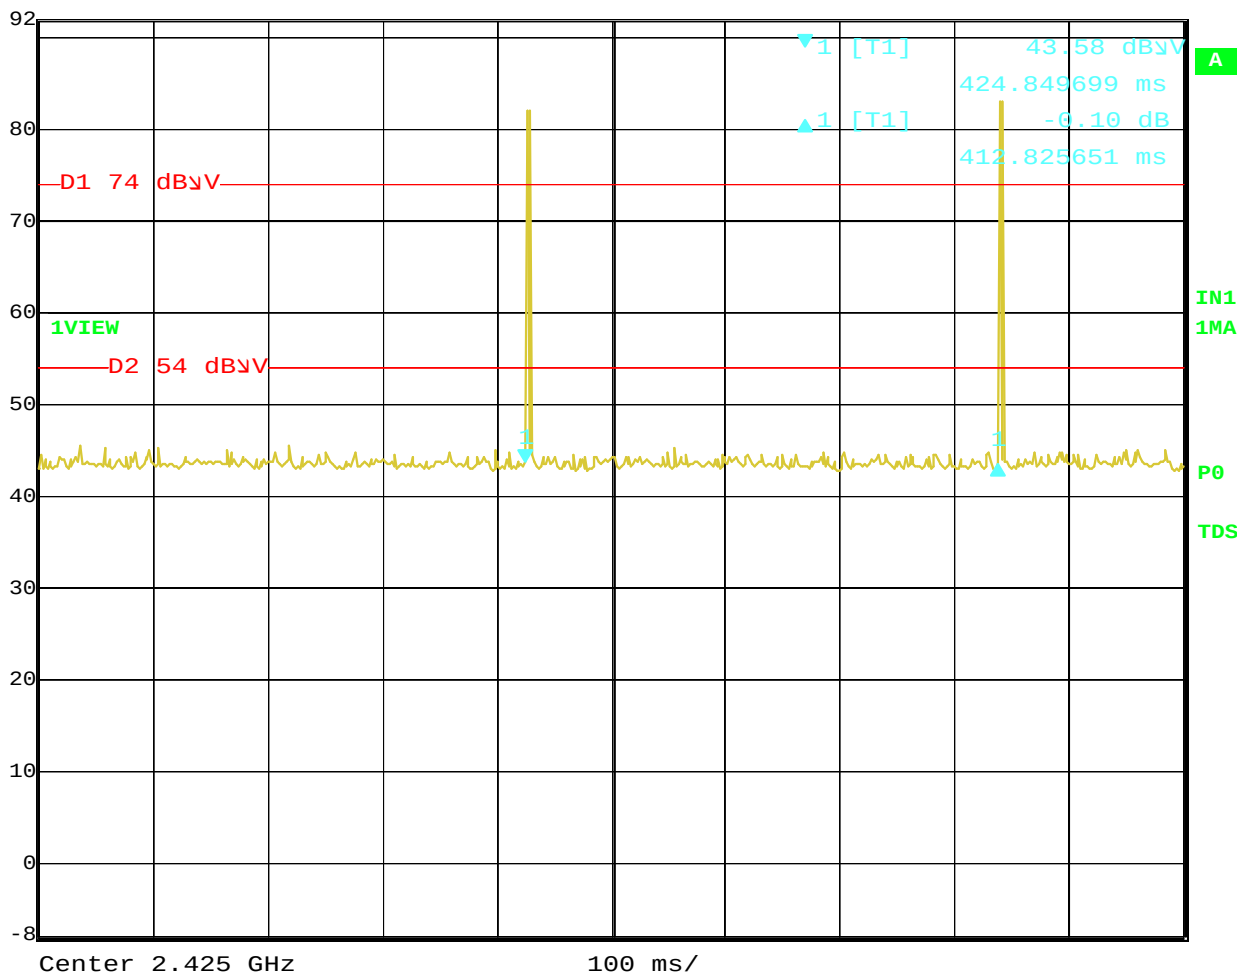


Date: 18.JUN.2014 07:49:41

Time Between Pulses – Advertising Mode – The duty cycle is less than 10% -- thus the full 20 dB peak to average ratio is allowed

$$\text{Duty Cycle} = 3.206413 \text{ ms} / 100 \text{ ms} = 3.21\%$$



Ref Lvl 92 dBμV
Delta 1 [T1] 3.37 dB
1.402806 ms
RBW 1 MHz
VBW 3 MHz
SWT 100 ms
RF Att 10 dB
Unit dBμV

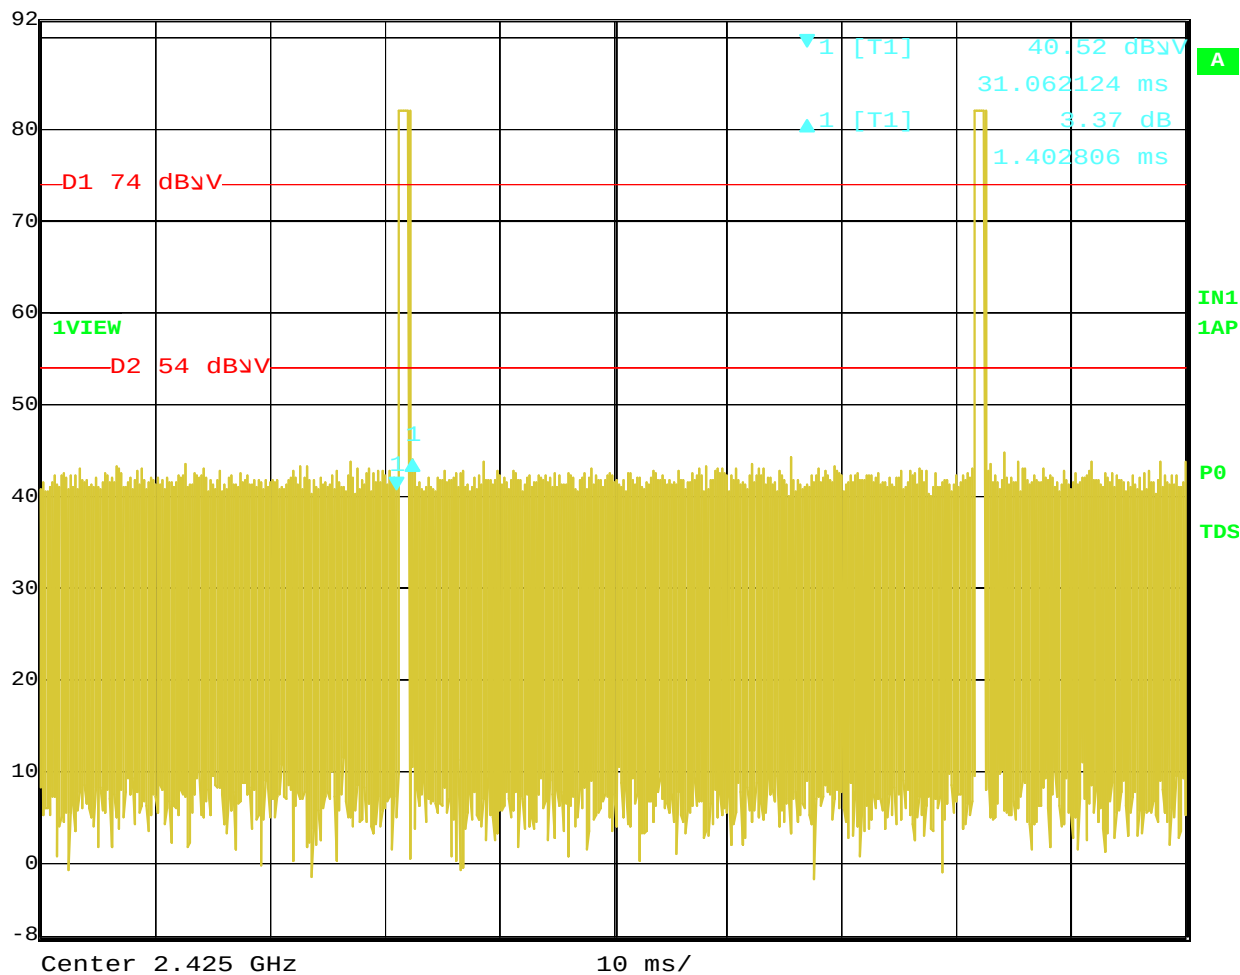


Date: 18.JUN.2014 07:43:31

Time of One Pulse - Pairing Mode



Ref Lvl 92 dBμV
Delta 1 [T1] 2.47 dB
50.300601 ms
RBW 1 MHz
VBW 3 MHz
SWT 100 ms
RF Att 10 dB
Unit dBμV

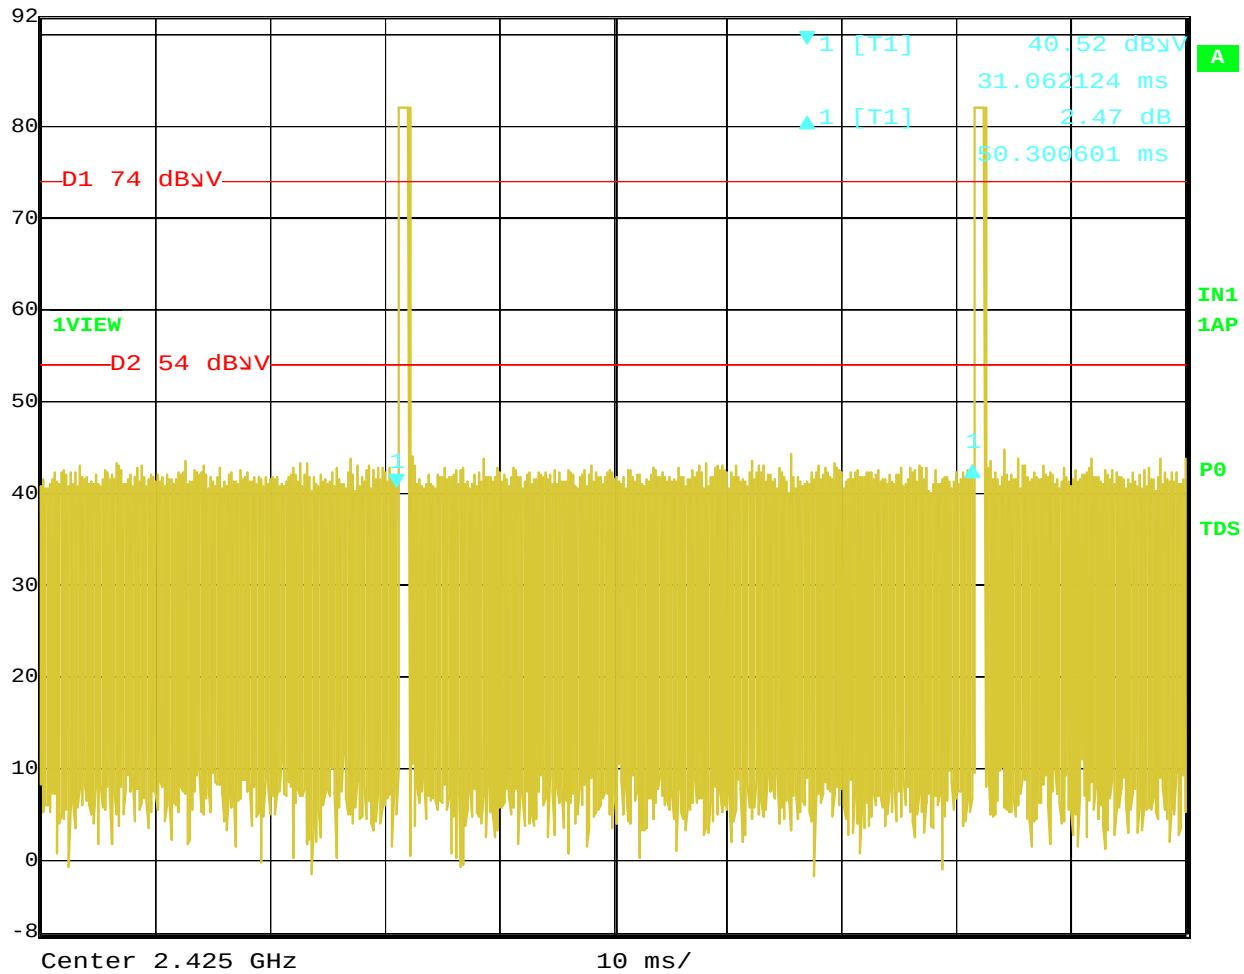

Date: 18.JUN.2014 07:43:03

Time Between Pulses – Pairing Mode – The duty cycle is less than 10% -- thus the full 20 dB peak to average ratio is allowed

$$\text{Duty Cycle} = 1.402806 \text{ ms} / 50.300601 \text{ ms} = 2.79\%$$