

Report on the Radio Testing  
For  
Universal Electronics Inc.  
on  
XR100-UQ  
Report no. TRA-061708-47-00B  
29th Aug 2023

RF915 11.0



0026

Report Number: TRA-061708-47-00B  
Issue: B

REPORT ON THE RADIO TESTING OF A  
Universal Electronics Inc.  
XR100-UQ  
WITH RESPECT TO SPECIFICATION  
FCC 47CFR 15.247

TEST DATE: 13th June 2023 to 14th June 2023

Tested by:



Steven Garwell

Written by:



Steven Garwell  
Radio Test Engineer

Approved by:

John Charters  
Department Manager - Radio

Date: 29th Aug 2023

Disclaimers:

- [1] THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE  
[2] THE RESULTS CONTAINED IN THIS DOCUMENT RELATE ONLY TO THE ITEM(S) TESTED

RF915 11.0



## 1 Revision Record

| <i><b>Issue Number</b></i> | <i><b>Issue Date</b></i>  | <i><b>Revision History</b></i>                                |
|----------------------------|---------------------------|---------------------------------------------------------------|
| A                          | 29th Aug 2023             | Original                                                      |
| B                          | 29 <sup>th</sup> Aug 2023 | General updates and technical corrections throughout document |

## 2 Summary

|                             |                                                                                          |
|-----------------------------|------------------------------------------------------------------------------------------|
| TEST REPORT NUMBER:         | TRA-061708-47-00B                                                                        |
| WORKS ORDER NUMBER:         | TRA-061708-00                                                                            |
| PURPOSE OF TEST:            | Certification                                                                            |
| TEST SPECIFICATION:         | 47CFR15.247                                                                              |
| EQUIPMENT UNDER TEST (EUT): | XR100-UQ                                                                                 |
| FCC IDENTIFIER:             | MG3-R326810                                                                              |
| EUT SERIAL NUMBER(S):       | MAC Address: E4:A6:34:04:BB:53 (radiated),<br>MAC Address: E4:A6:34:04:CA:32 (conducted) |
| AGENT:                      | Universal Electronics Inc.                                                               |
| AGENT ADDRESS:              | 15147 North Scottsdale Road<br>Suite H300<br>Scottsdale<br>AZ 85254                      |
| AGENT CONTACT:              | Jesse Mendez<br>☎ 714 918-9701<br>✉ jmendez@uei.com                                      |
| TEST DATE:                  | 13th June 2023 to 14th June 2023                                                         |
| TESTED BY:                  | Steven Garwell<br>Element                                                                |

## 2.1 Test Summary

| Test Method and Description                                                       |      | Requirement<br>Clause 47CFR15 | Applicable to<br>this equipment     | Result / Note |
|-----------------------------------------------------------------------------------|------|-------------------------------|-------------------------------------|---------------|
| Radiated spurious emissions (restricted bands of operation and cabinet radiation) |      | 15.247 (d)                    | <input checked="" type="checkbox"/> | PASS          |
| AC power line conducted emissions                                                 |      | 15.207                        | <input type="checkbox"/>            | Note 1        |
| Occupied bandwidth                                                                |      | 15.247 (a) (2)                | <input checked="" type="checkbox"/> | PASS          |
| Conducted carrier power                                                           | Peak | 15.247 (b) (3)                | <input checked="" type="checkbox"/> | PASS          |
|                                                                                   | Max. |                               | <input type="checkbox"/>            |               |
| Out of band emissions                                                             |      | 15.247 (d)                    | <input checked="" type="checkbox"/> | PASS          |
| Power spectral density                                                            |      | 15.247 (e)                    | <input checked="" type="checkbox"/> | PASS          |
| Calculation of duty correction                                                    |      | -                             | <input checked="" type="checkbox"/> | Note 2        |

### Specific Note:

1. The EUT is a battery powered device.
2. Client declaration – see appendix A

### General Notes:

The results contained in this report relate only to the items tested, in the condition at time of test, and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only. Any modifications made are identified in Section 8 of this report.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 5.2 of this test report (Deviations from Test Standards).

### General notes

The decision rule for compliance is not inherent within this specification and compliance is based on the customer requesting a simple acceptance rule based on understanding and acceptance of Elements Measurement Uncertainty values.

### 3 Contents

|       |                                                       |    |
|-------|-------------------------------------------------------|----|
| 1     | Revision Record .....                                 | 3  |
| 2     | Summary .....                                         | 4  |
| 2.1   | Test Summary .....                                    | 5  |
| 3     | Contents .....                                        | 6  |
| 4     | Introduction .....                                    | 7  |
| 5     | Test Specifications .....                             | 8  |
| 5.1   | Normative References .....                            | 8  |
| 5.2   | Deviations from Test Standards .....                  | 8  |
| 6     | Glossary of Terms .....                               | 9  |
| 7     | Equipment under Test .....                            | 10 |
| 7.1   | EUT Identification .....                              | 10 |
| 7.2   | System Equipment .....                                | 10 |
| 7.3   | EUT Mode of Operation .....                           | 10 |
| 7.4   | EUT Radio Parameters .....                            | 10 |
| 7.4.1 | General .....                                         | 10 |
| 7.4.2 | Product specific declarations .....                   | 11 |
| 7.5   | EUT Description .....                                 | 11 |
| 8     | Modifications .....                                   | 12 |
| 9     | EUT Test Setup .....                                  | 13 |
| 9.1   | Block Diagram .....                                   | 13 |
| 9.2   | General Set-up Photographs .....                      | 14 |
| 9.3   | Measurement software .....                            | 16 |
| 10    | General Technical Parameters .....                    | 17 |
| 10.1  | Normal Conditions .....                               | 17 |
| 10.2  | Varying Test Conditions .....                         | 17 |
| 11    | Radiated emissions .....                              | 18 |
| 11.1  | Definitions .....                                     | 18 |
| 11.2  | Test Parameters .....                                 | 18 |
| 11.3  | Test Limit .....                                      | 18 |
| 11.4  | Test Method .....                                     | 19 |
| 11.5  | Test Equipment .....                                  | 20 |
| 11.6  | Test Results .....                                    | 21 |
| 12    | Occupied Bandwidth .....                              | 25 |
| 12.1  | Definition .....                                      | 25 |
| 12.2  | Test Parameters .....                                 | 25 |
| 12.3  | Test Limit .....                                      | 25 |
| 12.4  | Test Method .....                                     | 26 |
| 12.5  | Test Equipment .....                                  | 26 |
| 12.6  | Test Results .....                                    | 27 |
| 13    | Maximum peak conducted output power .....             | 28 |
| 13.1  | Definition .....                                      | 28 |
| 13.2  | Test Parameters .....                                 | 28 |
| 13.3  | Test Limit .....                                      | 28 |
| 13.4  | Test Method .....                                     | 29 |
| 13.5  | Test Equipment .....                                  | 29 |
| 13.6  | Test Results .....                                    | 30 |
| 14    | Out-of-band and conducted spurious emissions .....    | 31 |
| 14.1  | Definition .....                                      | 31 |
| 14.2  | Test Parameters .....                                 | 31 |
| 14.3  | Test Limit .....                                      | 31 |
| 14.4  | Test Method .....                                     | 32 |
| 14.5  | Test Equipment .....                                  | 32 |
| 14.6  | Test Results .....                                    | 33 |
| 15    | Power spectral density .....                          | 36 |
| 15.1  | Definition .....                                      | 36 |
| 15.2  | Test Parameters .....                                 | 36 |
| 15.3  | Test Limit .....                                      | 36 |
| 15.4  | Test Method .....                                     | 37 |
| 15.5  | Test Equipment .....                                  | 37 |
| 15.6  | Test Results .....                                    | 38 |
| 16    | Measurement Uncertainty .....                         | 39 |
| 17    | RF Exposure .....                                     | 41 |
| 17.1  | General SAR test reduction & exclusion guidance ..... | 41 |
| 18    | Appendix A – client declaration .....                 | 42 |

## 4 Introduction

This report TRA-061708-47-00B presents the results of the Radio testing on a Universal Electronics Inc., XR100-UQ to specification 47CFR15 Radio Frequency Devices.

The testing was carried out for Universal Electronics Inc. by Element, at the address detailed below.

|                          |                                                                                             |                                     |                                                                                                    |                          |                                                                                                                       |
|--------------------------|---------------------------------------------------------------------------------------------|-------------------------------------|----------------------------------------------------------------------------------------------------|--------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <input type="checkbox"/> | Element Hull<br>Unit E<br>South Orbital Trading Park<br>Hedon Road<br>Hull<br>HU9 1NJ<br>UK | <input checked="" type="checkbox"/> | Element Skelmersdale<br>Unit 1<br>Pendle Place<br>Skelmersdale<br>West Lancashire<br>WN8 9PN<br>UK | <input type="checkbox"/> | Element Surrey Hills<br>Unit 15 B<br>Henley Business Park<br>Pirbright Road<br>Normandy<br>Guildford<br>GU3 2DX<br>UK |
|--------------------------|---------------------------------------------------------------------------------------------|-------------------------------------|----------------------------------------------------------------------------------------------------|--------------------------|-----------------------------------------------------------------------------------------------------------------------|

This report details the configuration of the equipment, the test methods used and any relevant modifications where appropriate.

All test and measurement equipment under the control of the laboratory and requiring calibration is subject to an established programme and procedures to control and maintain measurement standards. The quality management system meets the principles of ISO 9001, and has quality control procedures for monitoring the validity of tests undertaken. Records and sufficient detail are retained to establish an audit trail of calibration records relating to its test results for a defined period. Under control of the established calibration programme, key quantities or values of the test & measurement instrumentation are within specification and comply with the relevant traceable internationally recognised and appropriate standard specifications, which are UKAS calibrated as such where these properties have a significant effect on results. Participation in inter-laboratory comparisons and proficiency testing ensures satisfactory correlation of results conform to Elements own procedures, as well as statistical techniques for analysis of test data providing the appropriate confidence in measurements.

Throughout this report EUT denotes equipment under test.

### FCC Site Listing:

The test laboratory is accredited for the above sites under the US-UK MRA,

### Designation number(s):

|                      |        |
|----------------------|--------|
| Element Hull         | UK2007 |
| Element Skelmersdale | UK2020 |

The test site requirements of ANSI C63.4-2014 are met up to 1GHz.

The test site SVSWR requirements of CISPR 16-1-4:2010 are met over the frequency range 1 GHz to 18 GHz.

## **5 Test Specifications**

### **5.1 Normative References**

- FCC 47 CFR Ch. I – Part 15 – Radio Frequency Devices.
- ANSI C63.10-2013 – American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
- ANSI C63.4-2014 – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

### **5.2 Deviations from Test Standards**

There were no deviations from the test standard.

## 6 Glossary of Terms

|               |                                                                  |
|---------------|------------------------------------------------------------------|
| <b>§</b>      | denotes a section reference from the standard, not this document |
| <b>AC</b>     | Alternating Current                                              |
| <b>ANSI</b>   | American National Standards Institute                            |
| <b>BW</b>     | bandwidth                                                        |
| <b>C</b>      | Celsius                                                          |
| <b>CFR</b>    | Code of Federal Regulations                                      |
| <b>CW</b>     | Continuous Wave                                                  |
| <b>dB</b>     | decibel                                                          |
| <b>dBm</b>    | dB relative to 1 milliwatt                                       |
| <b>DC</b>     | Direct Current                                                   |
| <b>DSSS</b>   | Direct Sequence Spread Spectrum                                  |
| <b>EIRP</b>   | Equivalent Isotropically Radiated Power                          |
| <b>ERP</b>    | Effective Radiated Power                                         |
| <b>EUT</b>    | Equipment under Test                                             |
| <b>FCC</b>    | Federal Communications Commission                                |
| <b>FHSS</b>   | Frequency Hopping Spread Spectrum                                |
| <b>Hz</b>     | hertz                                                            |
| <b>IC</b>     | Industry Canada                                                  |
| <b>ITU</b>    | International Telecommunication Union                            |
| <b>LBT</b>    | Listen before Talk                                               |
| <b>m</b>      | metre                                                            |
| <b>max</b>    | maximum                                                          |
| <b>MIMO</b>   | Multiple Input and Multiple Output                               |
| <b>min</b>    | minimum                                                          |
| <b>MRA</b>    | Mutual Recognition Agreement                                     |
| <b>N/A</b>    | Not Applicable                                                   |
| <b>PCB</b>    | Printed Circuit Board                                            |
| <b>PDF</b>    | Portable Document Format                                         |
| <b>Pt-mpt</b> | Point-to-multipoint                                              |
| <b>Pt-pt</b>  | Point-to-point                                                   |
| <b>RF</b>     | Radio Frequency                                                  |
| <b>RH</b>     | Relative Humidity                                                |
| <b>RMS</b>    | Root Mean Square                                                 |
| <b>Rx</b>     | receiver                                                         |
| <b>s</b>      | second                                                           |
| <b>SVSWR</b>  | Site Voltage Standing Wave Ratio                                 |
| <b>Tx</b>     | transmitter                                                      |
| <b>UKAS</b>   | United Kingdom Accreditation Service                             |
| <b>V</b>      | volt                                                             |
| <b>W</b>      | watt                                                             |
| <b>Ω</b>      | ohm                                                              |

## 7 Equipment under Test

### 7.1 EUT Identification

- Name: XR100-UQ
- Serial Number(s): MAC Address: E4:A6:34:04:BB:53 (radiated),  
MAC Address: E4:A6:34:04:CA:32 (conducted)
- Model Number: XR100
- Software Revision: PTC-UE878NME-CFG-A-DIF
- Build Level / Revision Number: 103.1.0.3

### 7.2 System Equipment

Equipment listed below forms part of the overall test setup and is required for equipment functionality and/or monitoring during testing. The compliance levels achieved in this report relate only to the EUT and not items given in the following list.

*Not Applicable – No support/monitoring equipment required.*

### 7.3 EUT Mode of Operation

The EUT was setup to transmit a permanently modulated carrier with 100% Duty cycle at a power setting of 8. The settings were sent to the EUT via a USB / Serial adaptor from Radio Control Console 4.0.0.0 program provided by the manufacturer. The adaptor was disconnected during test.

### 7.4 EUT Radio Parameters

#### 7.4.1 General

|                                       |                                                    |
|---------------------------------------|----------------------------------------------------|
| <b>Frequency of operation:</b>        | 2402 MHz – 2480 MHz                                |
| <b>Modulation type(s):</b>            | GFSK                                               |
| <b>Occupied channel bandwidth(s):</b> | 1 MHz                                              |
| <b>Channel spacing:</b>               | 2 MHz                                              |
| <b>ITU emission designator(s):</b>    | F1D                                                |
| <b>Declared output power(s):</b>      | +8dBm at the RF port pin                           |
| <b>Nominal Supply Voltage:</b>        | 3.0 Vdc Via 2x AAA Alkaline batteries              |
| <b>Antenna Type &amp; Gain:</b>       | PCB trace antenna (dipole configuration); +0.28dBi |

#### 7.4.2 Product specific declarations

|                                                                               |        |
|-------------------------------------------------------------------------------|--------|
| <b>Multiple antenna configuration(s), e.g. MIMO:</b>                          | Single |
| <b>Fixed pt-pt operations (yes/no):</b>                                       | No     |
| <b>Installation manual advice on pt-pt operational restrictions (yes/no):</b> | N/A    |
| <b>Fixed pt-mpt operations (yes/no):</b>                                      | No     |
| <b>Simultaneous tx (yes/no):</b>                                              | N/A    |

#### 7.5 EUT Description

The EUT is a hand held battery operated infra-red and BLE remote control.

## **8 Modifications**


No modifications were performed during this assessment.

## 9 EUT Test Setup


### 9.1 Block Diagram

The following diagram shows basic EUT interconnections:

The EUT is a battery powered standalone device


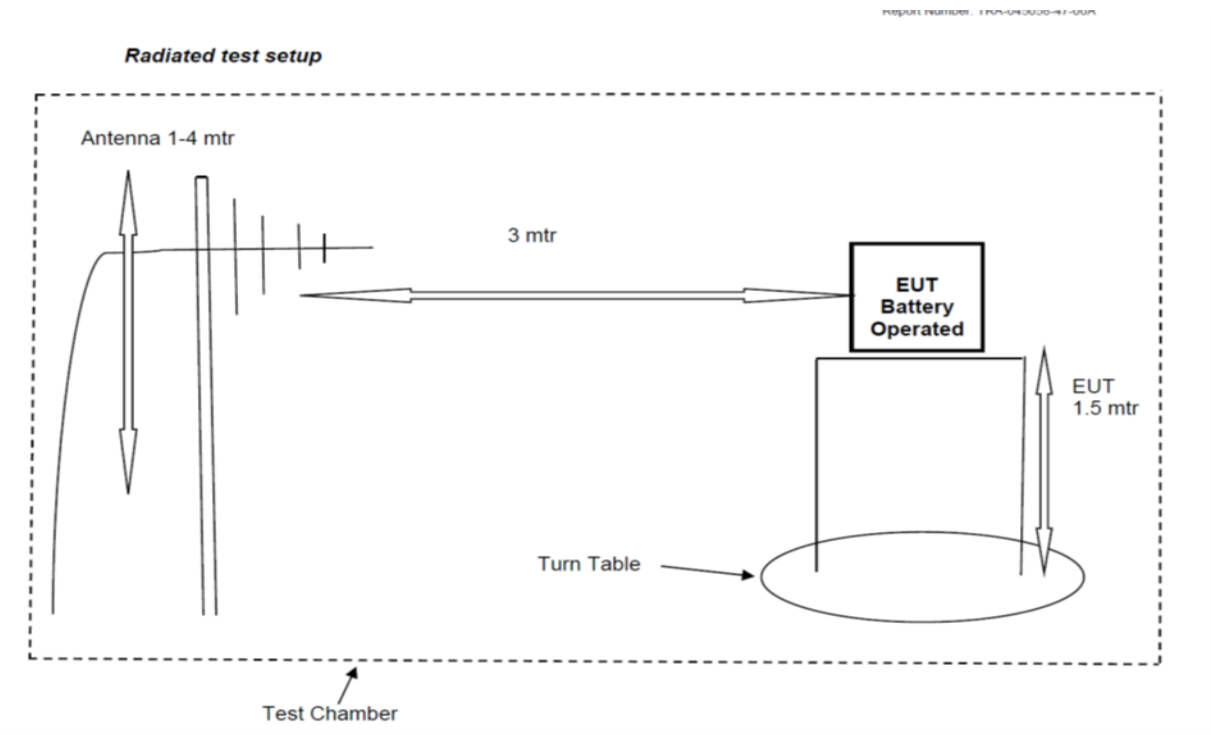



### *Bench test set-up*

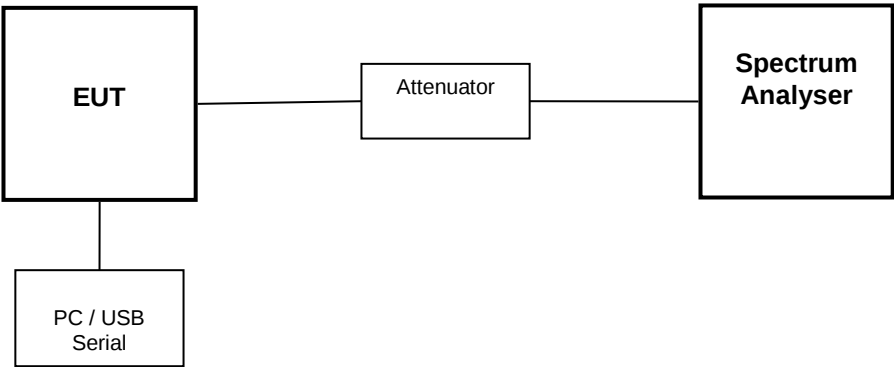


## 9.2 General Set-up Photographs


The following photographs shows basic EUT set-up:

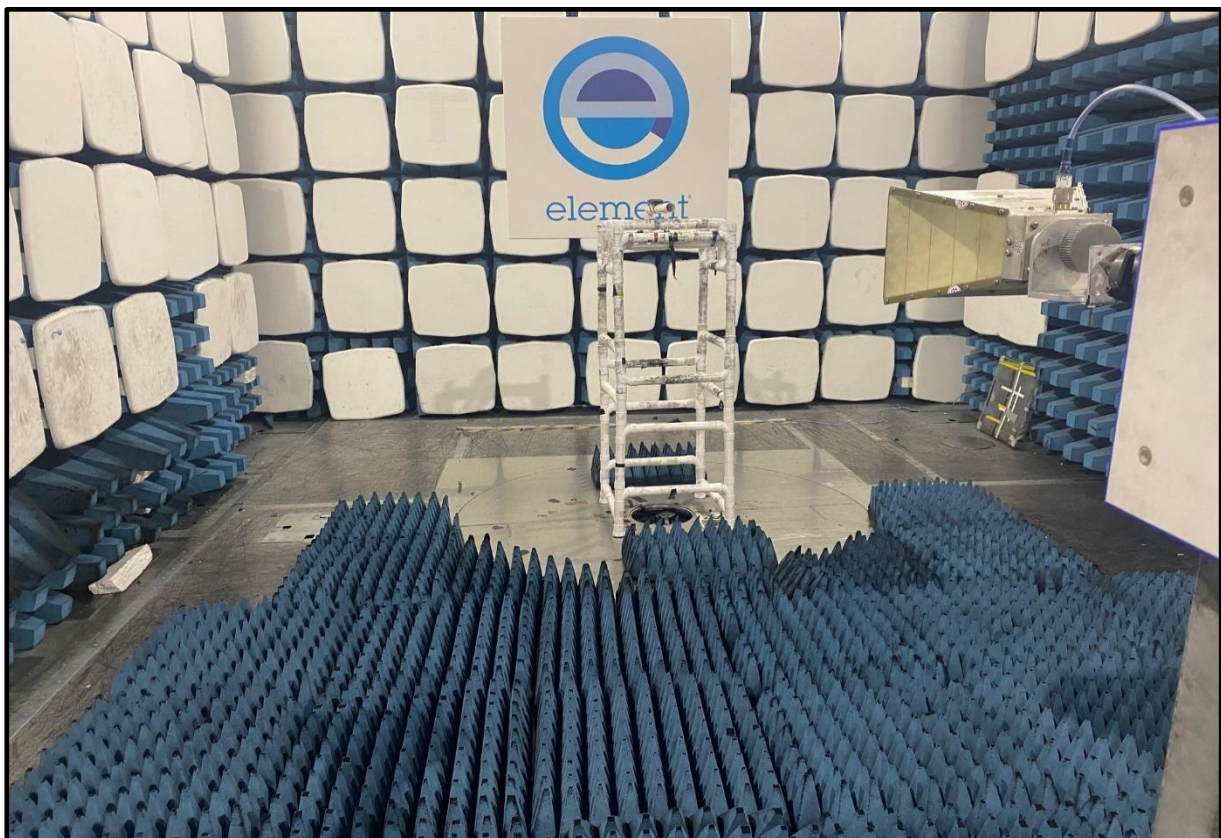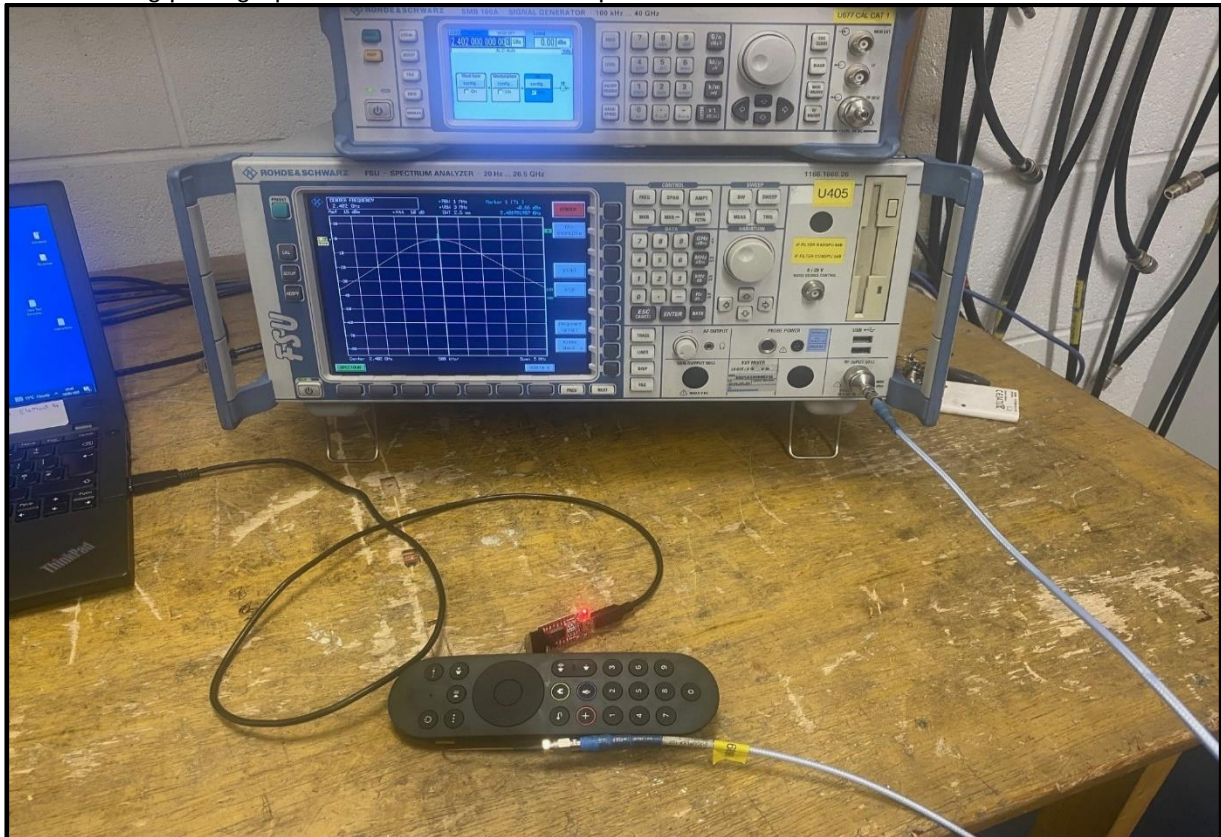

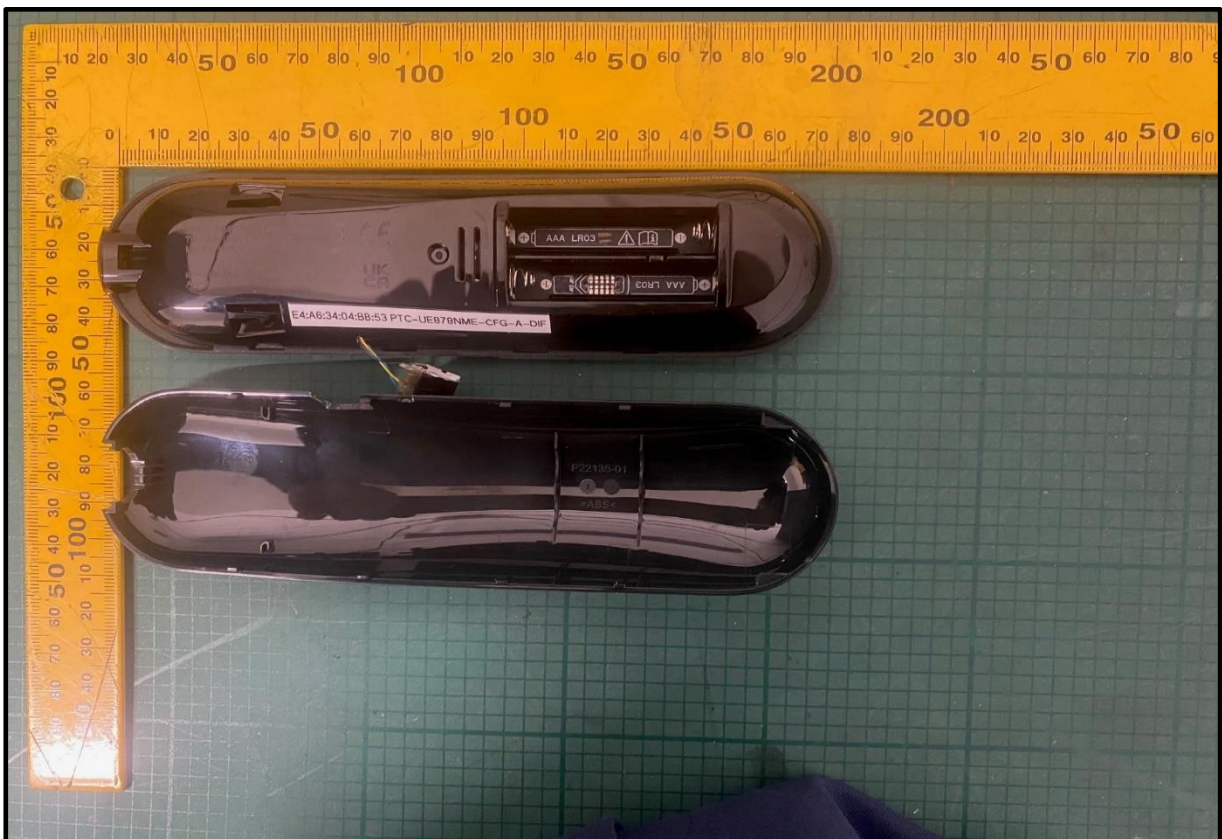

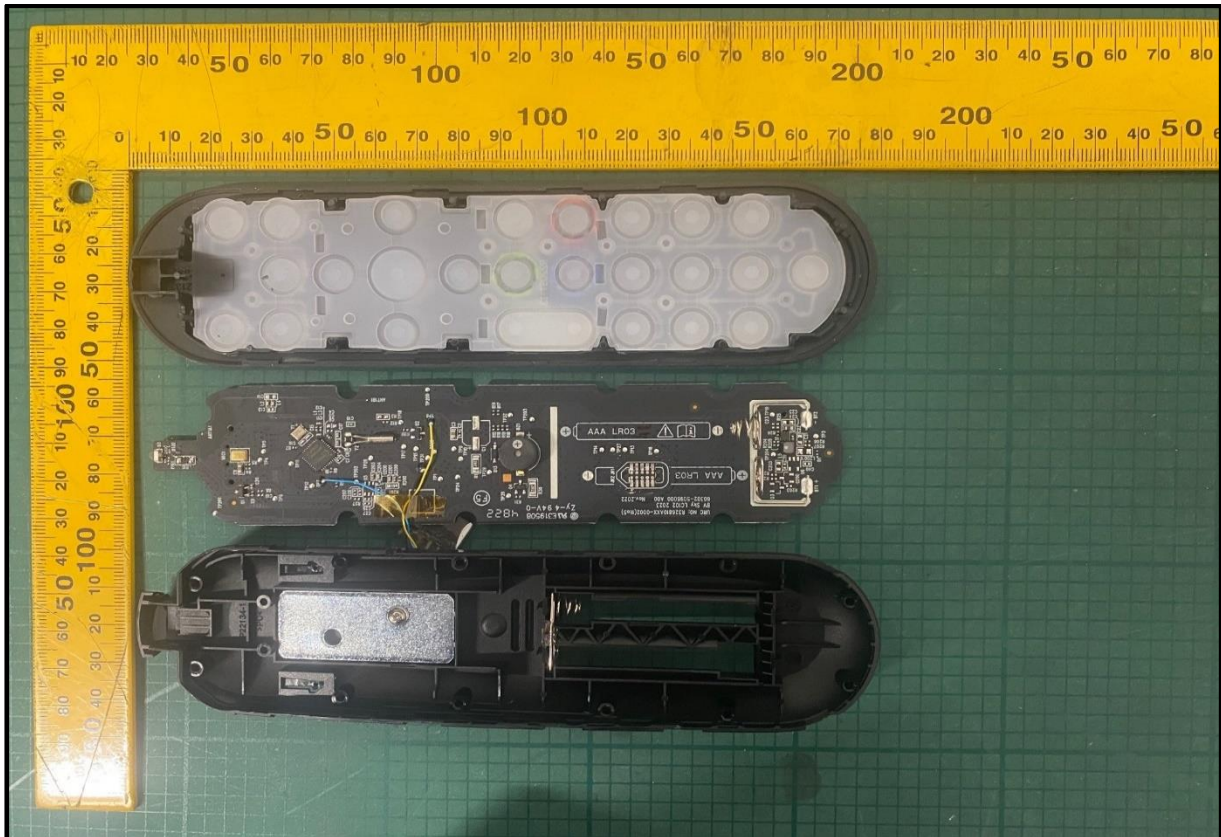

### Printing

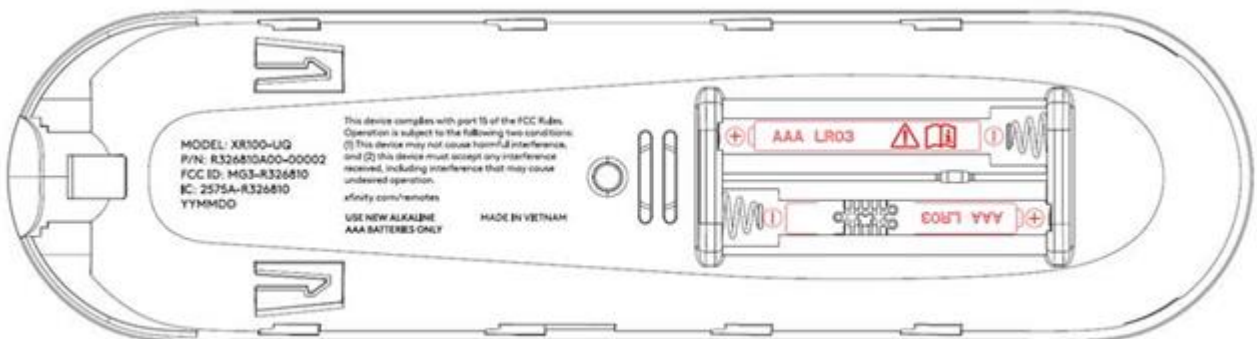

### 9.3 Measurement software

Where applicable, the following software was used to perform measurements contained within this report.

Element Emissions R5

## 10 General Technical Parameters

### 10.1 Normal Conditions

The EUT was tested under the normal environmental conditions of the test laboratory, except where otherwise stated. The normal power source applied was 3.0 Vdc via 2 x AAA Alkaline batteries.

### 10.2 Varying Test Conditions

There are no specific frequency stability requirements for the type of device. The results contained in this report demonstrate that the occupied bandwidth is contained within the authorised band.

Variation of supply voltage is required to ensure stability of the declared output power. During carrier power testing the following variations were made:

|                                     | <b>Category</b> | <b>Nominal</b> | <b>Variation</b> |
|-------------------------------------|-----------------|----------------|------------------|
| <input type="checkbox"/>            | Mains           | 110 Vac +/-2 % | 85 % and 115 %   |
| <input checked="" type="checkbox"/> | Battery         | New battery    | N/A              |

## 11 Radiated emissions

### 11.1 Definitions

#### *Spurious emissions*

Emissions on a frequency or frequencies, which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

#### *Restricted bands*

A frequency band in which intentional radiators are permitted to radiate only spurious emissions but not fundamental signals.

### 11.2 Test Parameters

|                           |                                                            |
|---------------------------|------------------------------------------------------------|
| Test Location:            | Element Skelmersdale                                       |
| Test Chamber:             | Chamber 01                                                 |
| Test Standard and Clause: | ANSI C63.10-2013, Clause 6.5 and 6.6                       |
| EUT Frequencies Measured: | 2402 MHz, 2442 MHz & 2480 MHz                              |
| Deviations from Standard: | None                                                       |
| Measurement BW:           | 30 MHz to 1 GHz: 120 kHz; Above 1 GHz: 1 MHz               |
| Measurement Detector:     | Up to 1 GHz: quasi-peak; Above 1 GHz: RMS average and Peak |

### Environmental Conditions (Normal Environment)

|                    |                                  |
|--------------------|----------------------------------|
| Temperature: 23 °C | +15 °C to +35 °C (as declared)   |
| Humidity: 59 % RH  | 20 % RH to 75 % RH (as declared) |
| Supply: 3.0 Vdc    | 3.0 Vdc (as declared)            |

### 11.3 Test Limit

Unwanted emissions that fall within the restricted frequency bands shall comply with the limits specified:

#### General Field Strength Limits for License-Exempt Transmitters at Frequencies above 30 MHz

| <i>Frequency<br/>(MHz)</i> | <i>Field Strength<br/>(<math>\mu\text{V/m}</math> at 3 m)</i> | <i>Field Strength<br/>(dB<math>\mu\text{V/m}</math> at 3 m)</i> |
|----------------------------|---------------------------------------------------------------|-----------------------------------------------------------------|
| 30 to 88                   | 100                                                           | 40.0                                                            |
| 88 to 216                  | 150                                                           | 43.5                                                            |
| 216 to 960                 | 200                                                           | 46.0                                                            |
| Above 960                  | 500                                                           | 54.0                                                            |

On frequencies below or equal to 1000 MHz, the limits shown are based on measuring equipment employing a CISPR quasi-peak detector function. On frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit.

### 11.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure i, the emissions from the EUT were measured on a spectrum analyzer / EMI receiver.

Radiated electromagnetic emissions from the EUT are checked first by preview scans. Preview scans for all spectrum and modulation characteristics are checked, using a peak detector and where applicable worst-case determined for function, operation, orientation, etc. for both vertical and horizontal polarisations. Pre-scan plots are shown with a peak detector and 100 kHz RBW.

If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.10 are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed, (see EUT setup photographs for more detail).

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. Emissions above 1 GHz are characterized using standard gain horn antennas. Pre-amplifiers and filters are used where required. Care is taken to ensure that test receiver resolution bandwidth, video bandwidth and detector type(s) meet the regulatory requirements.

For both horizontal and vertical polarizations, the EUT is then rotated through 360 degrees in azimuth until the highest emission is detected. At the previously determined azimuth the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected, this maximum value is recorded.

Power values measured on the test receiver / analyzer are converted to field strength, FS, in dB $\mu$ V/m at the regulatory distance, using:

$$FS = PR + CL + AF - PA + DC - CF$$

$$\text{Factor} = CL + AF - PA$$

Where,

PR is the power recorded on the receiver / spectrum analyzer in dB $\mu$ V;

CL is the cable loss in dB;

AF is the test antenna factor in dB/m;


PA is the pre-amplifier gain in dB (where used);

DC is the duty correction factor in dB (where used, e.g. harmonics of pulsed fundamental);

CF is the distance factor in dB (where measurement distance different to limit distance);

This field strength value is then compared with the regulatory limit.

**Figure i Test Setup**

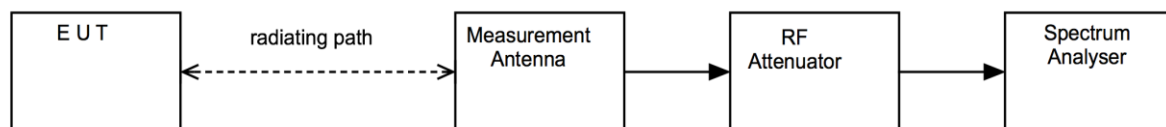


**11.5 Test Equipment**



| <b><i>Equipment<br/>Description</i></b> | <b><i>Manufacturer</i></b> | <b><i>Equipment<br/>Type</i></b> | <b><i>Element<br/>No</i></b> | <b><i>Due For<br/>Calibration</i></b> |
|-----------------------------------------|----------------------------|----------------------------------|------------------------------|---------------------------------------|
| Radiated Test Software                  | Element                    | Emissions R5                     | REF9000                      | Cal not required                      |
| Chamber 1                               | Rainford EMC               | ATS                              | U387                         | 2023-10-24                            |
| Spectrum Analyser                       | R&S                        | FSU50                            | U544                         | 2023-11-18                            |
| Pre Amp                                 | Agilent                    | 8449B                            | L572                         | 2023-10-24                            |
| Horn Antenna                            | EMCO                       | 3115                             | L138                         | 2024-05-23                            |
| 2.4G Band Stop Filter                   | BSC                        | SN 4478                          | U543                         | 2024-02-08                            |
| High Pass Filter                        | Atlantic Microwave         | AFH-07000                        | U558                         | 2024-02-13                            |
| Pre Amp                                 | AMETEK                     | LNA6901                          | U711                         | 2024-04-12                            |
| Bilog                                   | Chase                      | CBL611/B                         | U573                         | 2024-10-14                            |
| Horn 18-26GHz (&U330)                   | Flann                      | 20240-20                         | L300                         | 2024-06-30                            |

## 11.6 Test Results

Frequency: 2402 MHz, Power Setting: 8


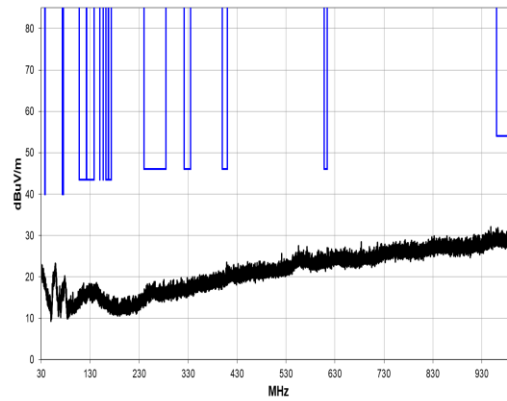


30 MHz to 1 GHz

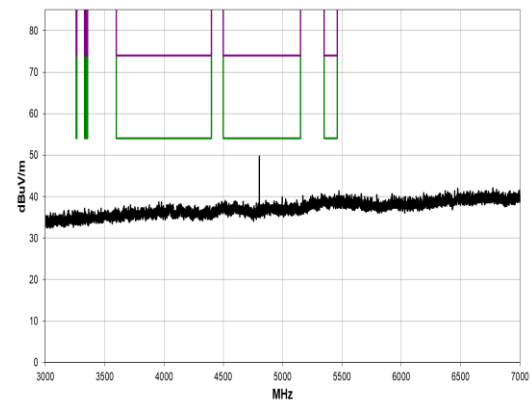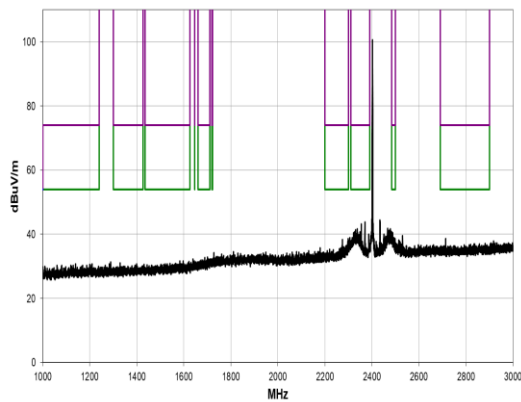

1 GHz to 3 GHz

3 GHz to 7 GHz

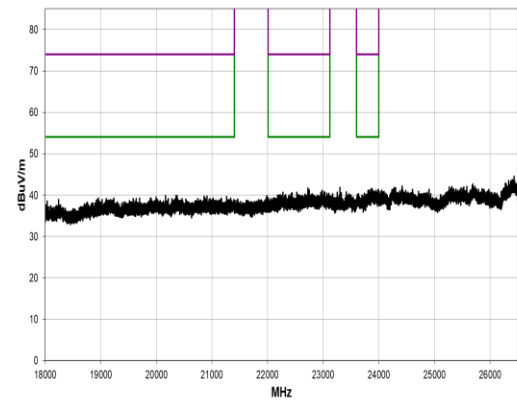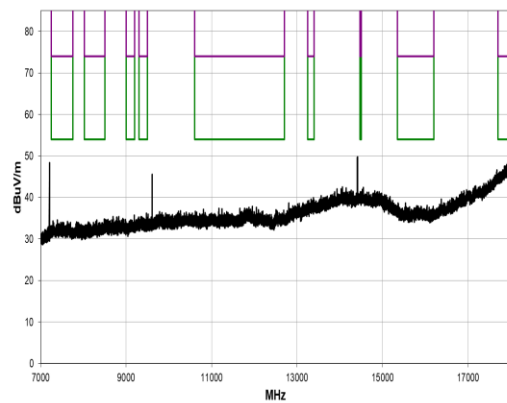

7 GHz to 18 GHz

18 GHz to 26.5 GHz


| Freq (MHz) | Amplitude (dBuV) | Factor (dB/m) | Antenna Height (meters) | Azimuth (degrees) | Duty Cycle Correction Factor (dB) | External Attenuation (dB) | Polarity/Transducer Type | Detector | Distance Adjustment (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) |
|------------|------------------|---------------|-------------------------|-------------------|-----------------------------------|---------------------------|--------------------------|----------|--------------------------|-------------------|----------------------|------------------------|
| 4804.508   | 51.5             | 5.3           | 1.5                     | 174.2             | 0.0                               | 0.0                       | Horz                     | PK       | 0.0                      | 56.8              | 74.0                 | -17.2                  |
| 4804.583   | 47.8             | 5.3           | 1.5                     | 69.1              | 0.0                               | 0.0                       | Vert                     | PK       | 0.0                      | 53.1              | 74.0                 | -20.9                  |
| 4803.442   | 42.8             | 5.3           | 1.5                     | 174.2             | -17.3                             | 0.0                       | Horz                     | AV       | 0.0                      | 30.8              | 54.0                 | -23.2                  |
| 4803.400   | 36.2             | 5.3           | 1.5                     | 69.1              | -17.3                             | 0.0                       | Vert                     | AV       | 0.0                      | 24.2              | 54.0                 | -29.8                  |

Note: Duty cycle correction factor derived from protocol – see appendix A



Tx duty cycle:  $1.360/10 = 13.6\%$

Corresponding duty cycle correction factor is  $20 * \text{Log}_{10}(0.360) = -17.32 \text{ dB}$ .


Frequency: 2442 MHz, Power Setting: 8

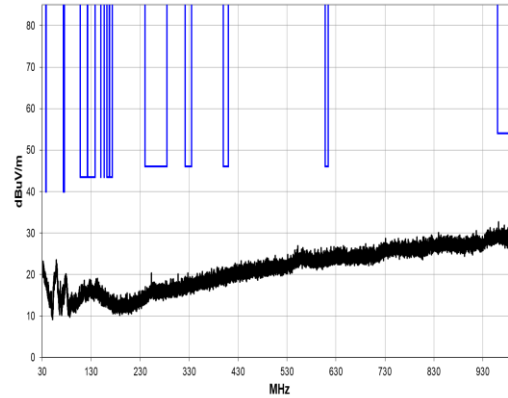


30 MHz to 1 GHz

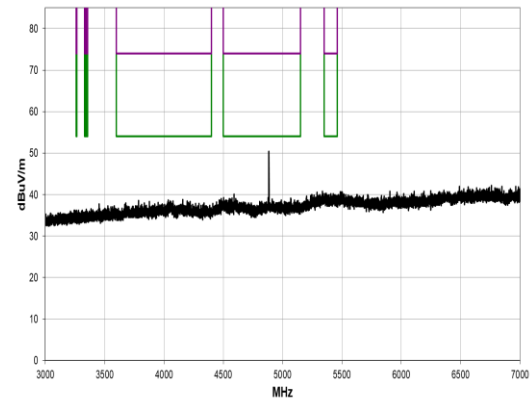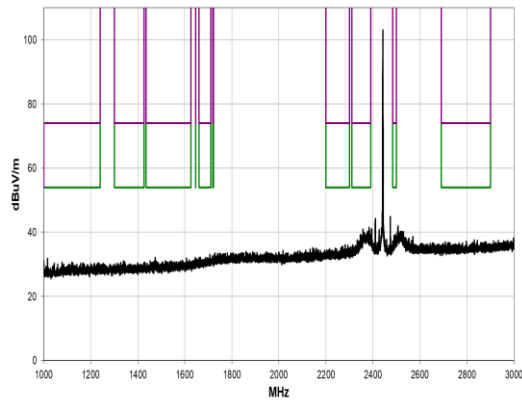

1 GHz to 3 GHz

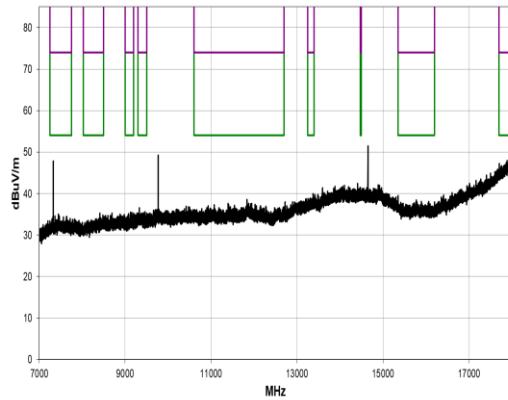

3 GHz to 7 GHz

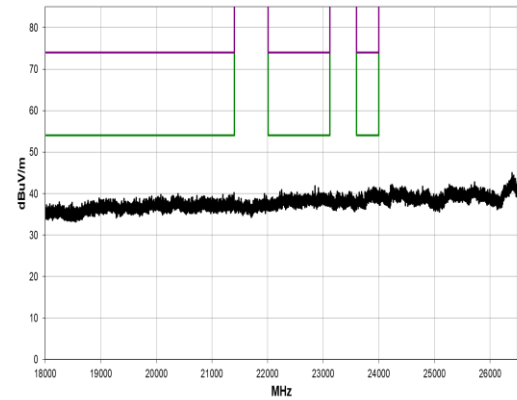

7 GHz to 18 GHz

18 GHz to 26.5 GHz


| Freq (MHz) | Amplitude (dBuV) | Factor (dB/m) | Antenna Height (meters) | Azimuth (degrees) | Duty Cycle Correction Factor (dB) | External Attenuation (dB) | Polarity/Transducer Type | Detector | Distance Adjustment (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) |
|------------|------------------|---------------|-------------------------|-------------------|-----------------------------------|---------------------------|--------------------------|----------|--------------------------|-------------------|----------------------|------------------------|
| 4884.475   | 51.0             | 5.8           | 1.5                     | 47.2              | 0.0                               | 0.0                       | Horz                     | PK       | 0.0                      | 56.8              | 74.0                 | -17.2                  |
| 4884.275   | 47.1             | 5.8           | 1.5                     | 316.1             | 0.0                               | 0.0                       | Vert                     | PK       | 0.0                      | 52.9              | 74.0                 | -21.1                  |
| 4883.517   | 42.0             | 5.8           | 1.5                     | 47.2              | -17.3                             | 0.0                       | Horz                     | AV       | 0.0                      | 30.5              | 54.0                 | -23.5                  |
| 4884.583   | 34.9             | 5.8           | 1.5                     | 316.1             | -17.3                             | 0.0                       | Vert                     | AV       | 0.0                      | 23.4              | 54.0                 | -30.6                  |
| 7325.208   | 53.3             | 10.1          | 1.5                     | 353.2             | 0.0                               | 0.0                       | Horz                     | PK       | -9.5                     | 53.9              | 74.0                 | -20.1                  |
| 7326.925   | 48.8             | 10.1          | 1.7                     | 19.0              | 0.0                               | 0.0                       | Vert                     | PK       | -9.5                     | 49.4              | 74.0                 | -24.6                  |
| 7325.292   | 44.5             | 10.1          | 1.5                     | 353.2             | -17.3                             | 0.0                       | Horz                     | AV       | -9.5                     | 27.8              | 54.0                 | -26.2                  |
| 7326.717   | 38.3             | 10.1          | 1.7                     | 19.0              | -17.3                             | 0.0                       | Vert                     | AV       | -9.5                     | 21.6              | 54.0                 | -32.4                  |

Note: Duty cycle correction factor derived from protocol – see appendix A



Tx duty cycle:  $1.360/10 = 13.6\%$

Corresponding duty cycle correction factor is  $20 * \log_{10}(0.360) = -17.32 \text{ dB}$ .


Frequency: 2480 MHz, Power Setting: 8

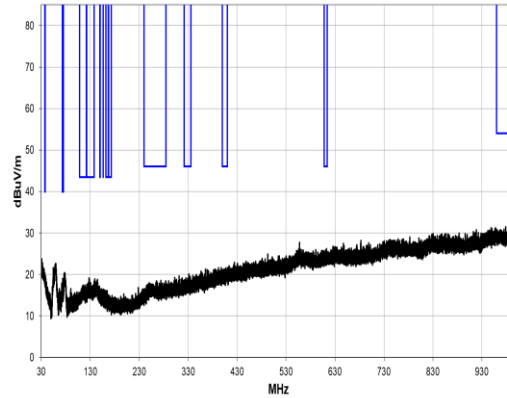


30 MHz to 1 GHz

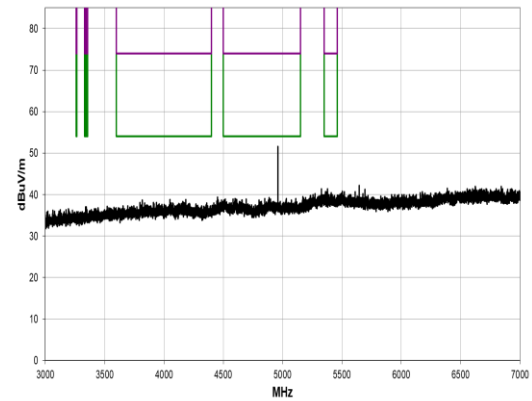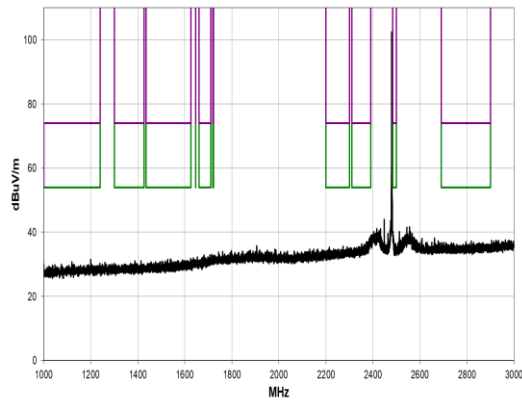

1 GHz to 3 GHz

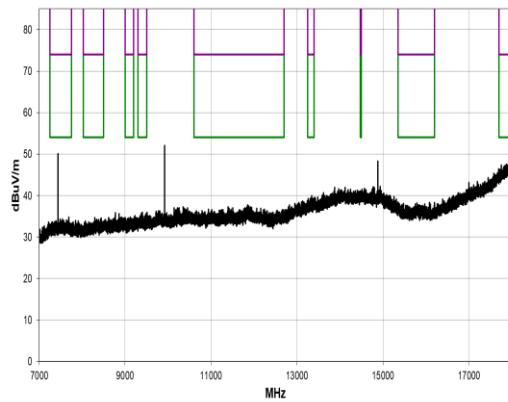

3 GHz to 7 GHz

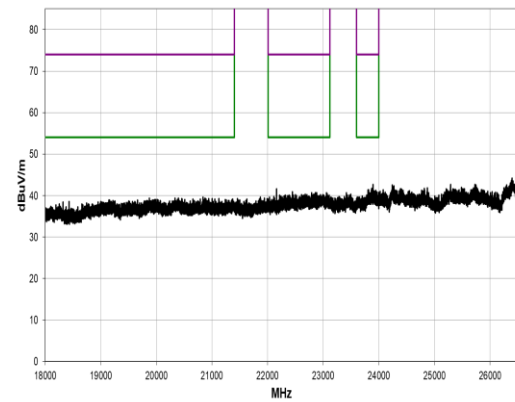

7 GHz to 18 GHz

18 GHz to 26.5 GHz

| Freq (MHz) | Amplitude (dBuV) | Factor (dB/m) | Antenna Height (meters) | Azimuth (degrees) | Duty Cycle Correction Factor (dB) | External Attenuation (dB) | Polarity/Transducer Type | Detector | Distance Adjustment (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) |
|------------|------------------|---------------|-------------------------|-------------------|-----------------------------------|---------------------------|--------------------------|----------|--------------------------|-------------------|----------------------|------------------------|
| 4959.658   | 52.0             | 6.1           | 1.7                     | 339.9             | 0.0                               | 0.0                       | Horz                     | PK       | 0.0                      | 58.1              | 74.0                 | -15.9                  |
| 4960.375   | 49.4             | 6.1           | 1.7                     | 178.9             | 0.0                               | 0.0                       | Vert                     | PK       | 0.0                      | 55.5              | 74.0                 | -18.5                  |
| 4960.450   | 43.8             | 6.1           | 1.7                     | 339.9             | -17.3                             | 0.0                       | Horz                     | AV       | 0.0                      | 32.6              | 54.0                 | -21.4                  |
| 4960.358   | 39.8             | 6.1           | 1.7                     | 178.9             | -17.3                             | 0.0                       | Vert                     | AV       | 0.0                      | 28.6              | 54.0                 | -25.4                  |
| 7440.692   | 55.1             | 9.8           | 1.5                     | 353.2             | 0.0                               | 0.0                       | Horz                     | PK       | -9.5                     | 55.4              | 74.0                 | -18.6                  |
| 7439.200   | 51.2             | 9.8           | 1.5                     | 25.9              | 0.0                               | 0.0                       | Vert                     | PK       | -9.5                     | 51.5              | 74.0                 | -22.5                  |
| 7440.750   | 46.9             | 9.8           | 1.5                     | 353.2             | -17.3                             | 0.0                       | Horz                     | AV       | -9.5                     | 29.9              | 54.0                 | -24.1                  |
| 7440.817   | 41.2             | 9.8           | 1.5                     | 25.9              | -17.3                             | 0.0                       | Vert                     | AV       | -9.5                     | 24.2              | 54.0                 | -29.8                  |


Note: Duty cycle correction factor derived from protocol – see appendix A

Tx duty cycle:  $1.360/10 = 13.6\%$

Corresponding duty cycle correction factor is  $20 * \log_{10}(0.360) = -17.32 \text{ dB}$



Upper Radiated Band Edge Peak / Average

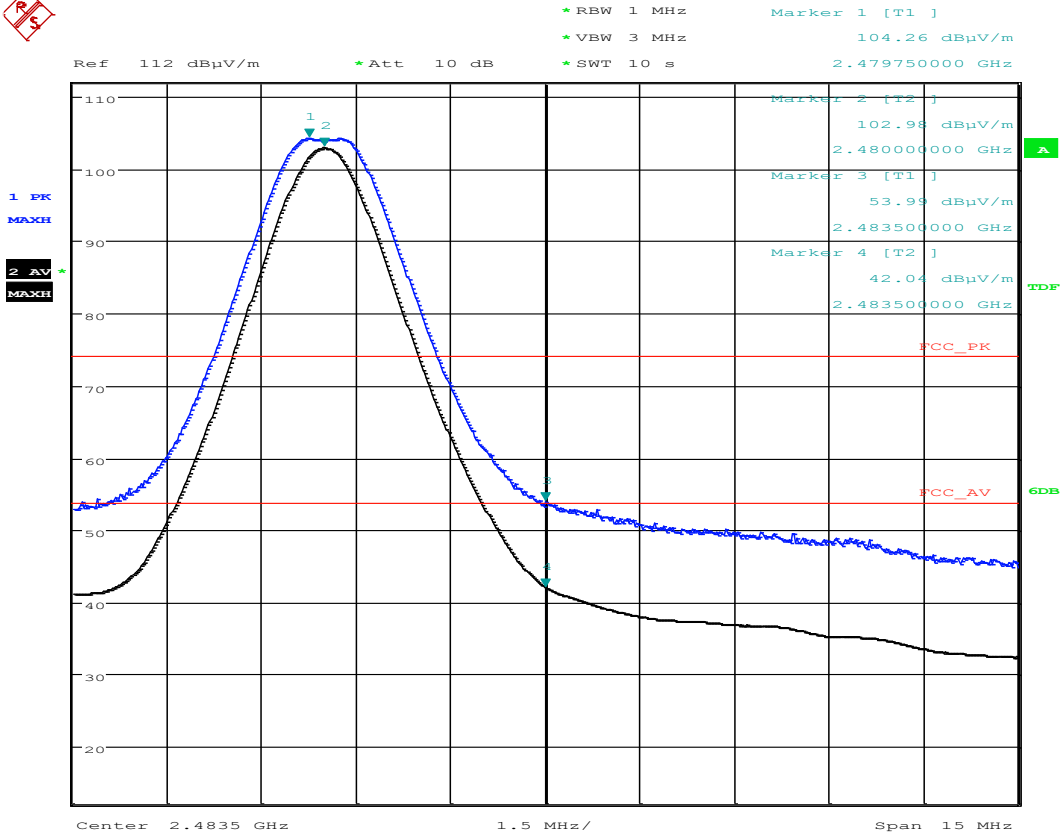

Date: 13.JUN.2023 13:47:59

## 12 Occupied Bandwidth

### 12.1 Definition

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal.

The 99% emission bandwidth is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained.

### 12.2 Test Parameters

|                                                              |                                               |
|--------------------------------------------------------------|-----------------------------------------------|
| Test Location:                                               | Element Skelmersdale                          |
| Test Chamber:                                                | Radio Laboratory                              |
| Test Standard and Clause:                                    | 6 dB Bandwidth: ANSI C63.10-2013, Clause 11.8 |
| EUT Frequencies Measured:                                    | 2402 MHz, 2442 MHz & 2480 MHz                 |
| EUT Channel Bandwidths:                                      | 1 MHz                                         |
| EUT Test Modulations:                                        | GFSK                                          |
| Deviations From Standard:                                    | None                                          |
| Measurement BW:                                              | 100 kHz                                       |
| Spectrum Analyzer Video BW:<br>(requirement at least 3x RBW) | 300 kHz                                       |
| Measurement Span:<br>(requirement 2 to 5 times OBW)          | 3 MHz                                         |
| Measurement Detector:                                        | Peak                                          |

### Environmental Conditions (Normal Environment)

|                    |                                  |
|--------------------|----------------------------------|
| Temperature: 25 °C | +15 °C to +35 °C (as declared)   |
| Humidity: 46 % RH  | 20 % RH to 75 % RH (as declared) |

### 12.3 Test Limit


The minimum -6 dB bandwidth shall be at least 500 kHz.

12.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iii, the bandwidth of the EUT was measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

Figure iii Test Setup




12.5 Test Equipment

| Equipment Type    | Manufacturer         | Equipment Description | Element No | Due For Calibration |
|-------------------|----------------------|-----------------------|------------|---------------------|
| Spectrum Analyser | R&S                  | FSU26                 | U405       | 2024-05-22          |
| Attenuator        | AtlanTecRF Microwave | 10dB SMA Attenuator   | U633       | Cal In use          |


12.6 Test Results

| Bandwidth Type: 6 dB; Modulation: GFSK; Data rate: 1 Mbps; Power setting: 8 |             |             |                 |        |
|-----------------------------------------------------------------------------|-------------|-------------|-----------------|--------|
| Frequency (MHz)                                                             | $F_L$ (MHz) | $F_H$ (MHz) | Bandwidth (kHz) | Result |
| 2402                                                                        | 2401.653846 | 2402.360577 | 706.731         | PASS   |
| 2442                                                                        | 2441.649038 | 2442.355769 | 706.731         | PASS   |
| 2480                                                                        | 2479.653846 | 2480.360577 | 706.731         | PASS   |

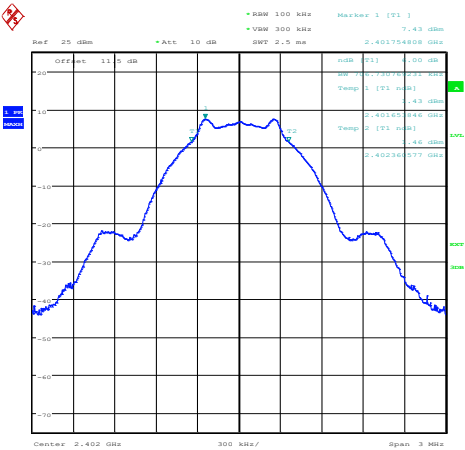


Date: 14 JUN 2023 09:27:09

2402 MHz

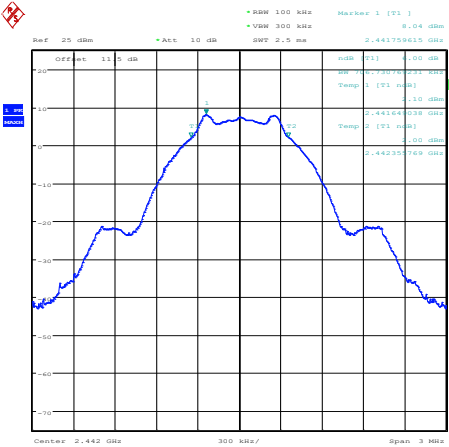

Date: 14 JUN 2023 09:25:21

2442 MHz

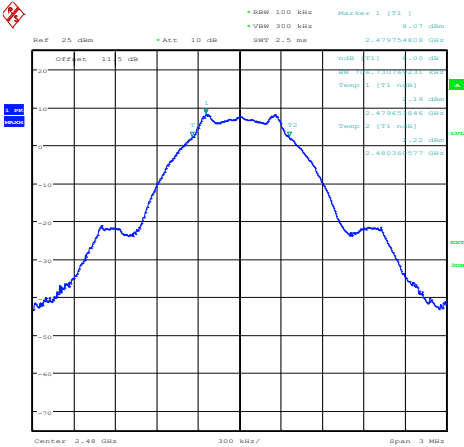

Date: 14 JUN 2023 09:28:29

2480 MHz

## 13 Maximum peak conducted output power

### 13.1 Definition

The maximum peak conducted output power is defined as the maximum power level measured with a peak detector using a filter with width and shape of which is sufficient to accept the signal bandwidth.

The effective isotropic radiated power (EIRP) is defined as the product of the power supplied to the antenna and the antenna gain in a given direction relative to an isotropic antenna.

### 13.2 Test Parameters

|                                                              |                                 |
|--------------------------------------------------------------|---------------------------------|
| Test Location:                                               | Element Skelmersdale            |
| Test Chamber:                                                | Radio Laboratory                |
| Test Standard and Clause:                                    | ANSI C63.10-2013, Clause 11.9.1 |
| EUT Frequencies Measured:                                    | 2402 MHz, 2442 MHz & 2480 MHz   |
| EUT Channel Bandwidths:                                      | 1 MHz                           |
| Deviations From Standard:                                    | None                            |
| Measurement BW:                                              | 2 MHz                           |
| Spectrum Analyzer Video BW:<br>(requirement at least 3x RBW) | 10 MHz                          |
| Measurement Detector:                                        | Peak                            |

### Environmental Conditions (Normal Environment)

|                    |                                  |
|--------------------|----------------------------------|
| Temperature: 25 °C | +15 °C to +35 °C (as declared)   |
| Humidity: 47 % RH  | 20 % RH to 75 % RH (as declared) |

### 13.3 Test Limit


For systems employing digital modulation techniques operating in the bands 902 to 928 MHz, 2400 to 2483.5 MHz and 5725 to 5850 MHz, the maximum peak conducted output power shall not exceed 1 W.

13.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iv, the resolution bandwidth of the spectrum analyser was increased above the EUT occupied bandwidth and the peak emission data noted.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

Figure iv Test Setup




13.5 Test Equipment

| Equipment Type    | Manufacturer         | Equipment Description | Element No | Due For Calibration |
|-------------------|----------------------|-----------------------|------------|---------------------|
| Spectrum Analyser | R&S                  | FSU26                 | U405       | 2024-05-22          |
| Attenuator        | AtlanTecRF Microwave | 10dB SMA Attenuator   | U633       | Cal In use          |

13.6 Test Results


| Modulation: GFSK; Data rate: 1 Mbps; Power setting: 8 |                       |                 |                                     |      |         |        |
|-------------------------------------------------------|-----------------------|-----------------|-------------------------------------|------|---------|--------|
| Frequency (MHz)                                       | Conducted Level (dBm) | Cable Loss (dB) | Maximum peak conducted output power |      |         | Result |
|                                                       |                       |                 | (dBm)                               | (mW) | (W)     |        |
| 2402                                                  | -3.79                 | 11.50           | 7.71                                | 5.90 | 0.00590 | PASS   |
| 2442                                                  | -3.24                 | 11.51           | 8.27                                | 6.71 | 0.00671 | PASS   |
| 2480                                                  | -3.24                 | 11.52           | 8.28                                | 6.73 | 0.00673 | PASS   |

Cable loss includes SMA pigtail and balun PCBA which has a cable loss of 1.0dB, this is associated with the temporary antenna connector provided for test

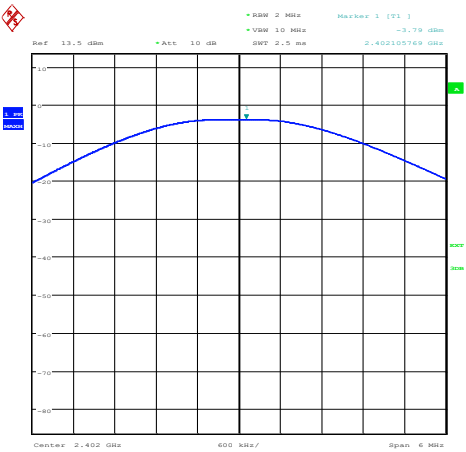


Date: 14 JUN 2023 10:27:35

2402 MHz

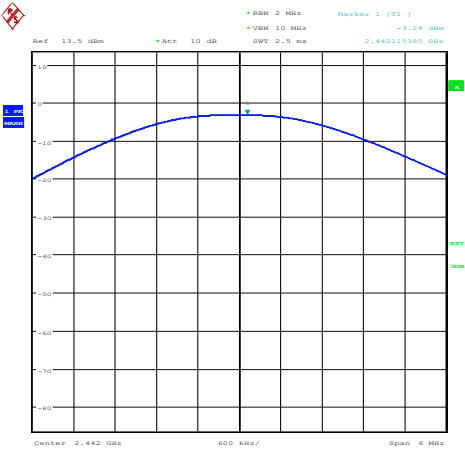

Date: 14 JUN 2023 10:36:24

2442 MHz

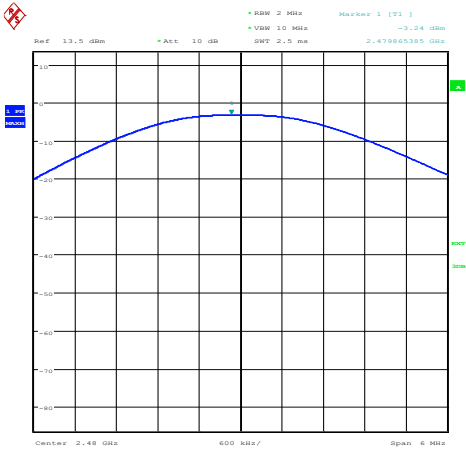

Date: 14 JUN 2023 11:10:20

2480 MHz

## 14 Out-of-band and conducted spurious emissions

### 14.1 Definition

#### *Out-of-band emission.*

Emission on a frequency or frequencies immediately outside the necessary bandwidth that results from the modulation process but excluding spurious emissions.

#### *Spurious emission.*

Emission on a frequency or frequencies that are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products, and frequency conversion products, but exclude out-of-band emissions.

### 14.2 Test Parameters

|                                                              |                                |
|--------------------------------------------------------------|--------------------------------|
| Test Location:                                               | Element Skelmersdale           |
| Test Chamber:                                                | Radio Laboratory               |
| Test Standard and Clause:                                    | ANSI C63.10-2013, Clause 11.11 |
| EUT Frequencies Measured:                                    | 2402 MHz, 2442 MHz & 2480 MHz  |
| EUT Channel Bandwidths:                                      | 1 MHz                          |
| Deviations From Standard:                                    | None                           |
| Measurement BW:                                              | 100 kHz                        |
| Spectrum Analyzer Video BW:<br>(requirement at least 3x RBW) | 300 kHz                        |
| Measurement Detector:                                        | Peak                           |
| Measurement Range:                                           | 9 kHz to 25 GHz                |

### Environmental Conditions (Normal Environment)

|                    |                                  |
|--------------------|----------------------------------|
| Temperature: 25 °C | +15 °C to +35 °C (as declared)   |
| Humidity: 46 % RH  | 20 % RH to 75 % RH (as declared) |

### 14.3 Test Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in FCC 47CFR15.209(a).

14.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure v, the emissions from the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst case configuration in each bandwidth.


Figure v Test Setup



14.5 Test Equipment


| Equipment Type    | Manufacturer         | Equipment Description | Element No | Due For Calibration |
|-------------------|----------------------|-----------------------|------------|---------------------|
| Spectrum Analyser | R&S                  | FSU26                 | U405       | 2024-05-22          |
| Attenuator        | AtlanTecRF Microwave | 10dB SMA Attenuator   | U633       | Cal In use          |

14.6 Test Results

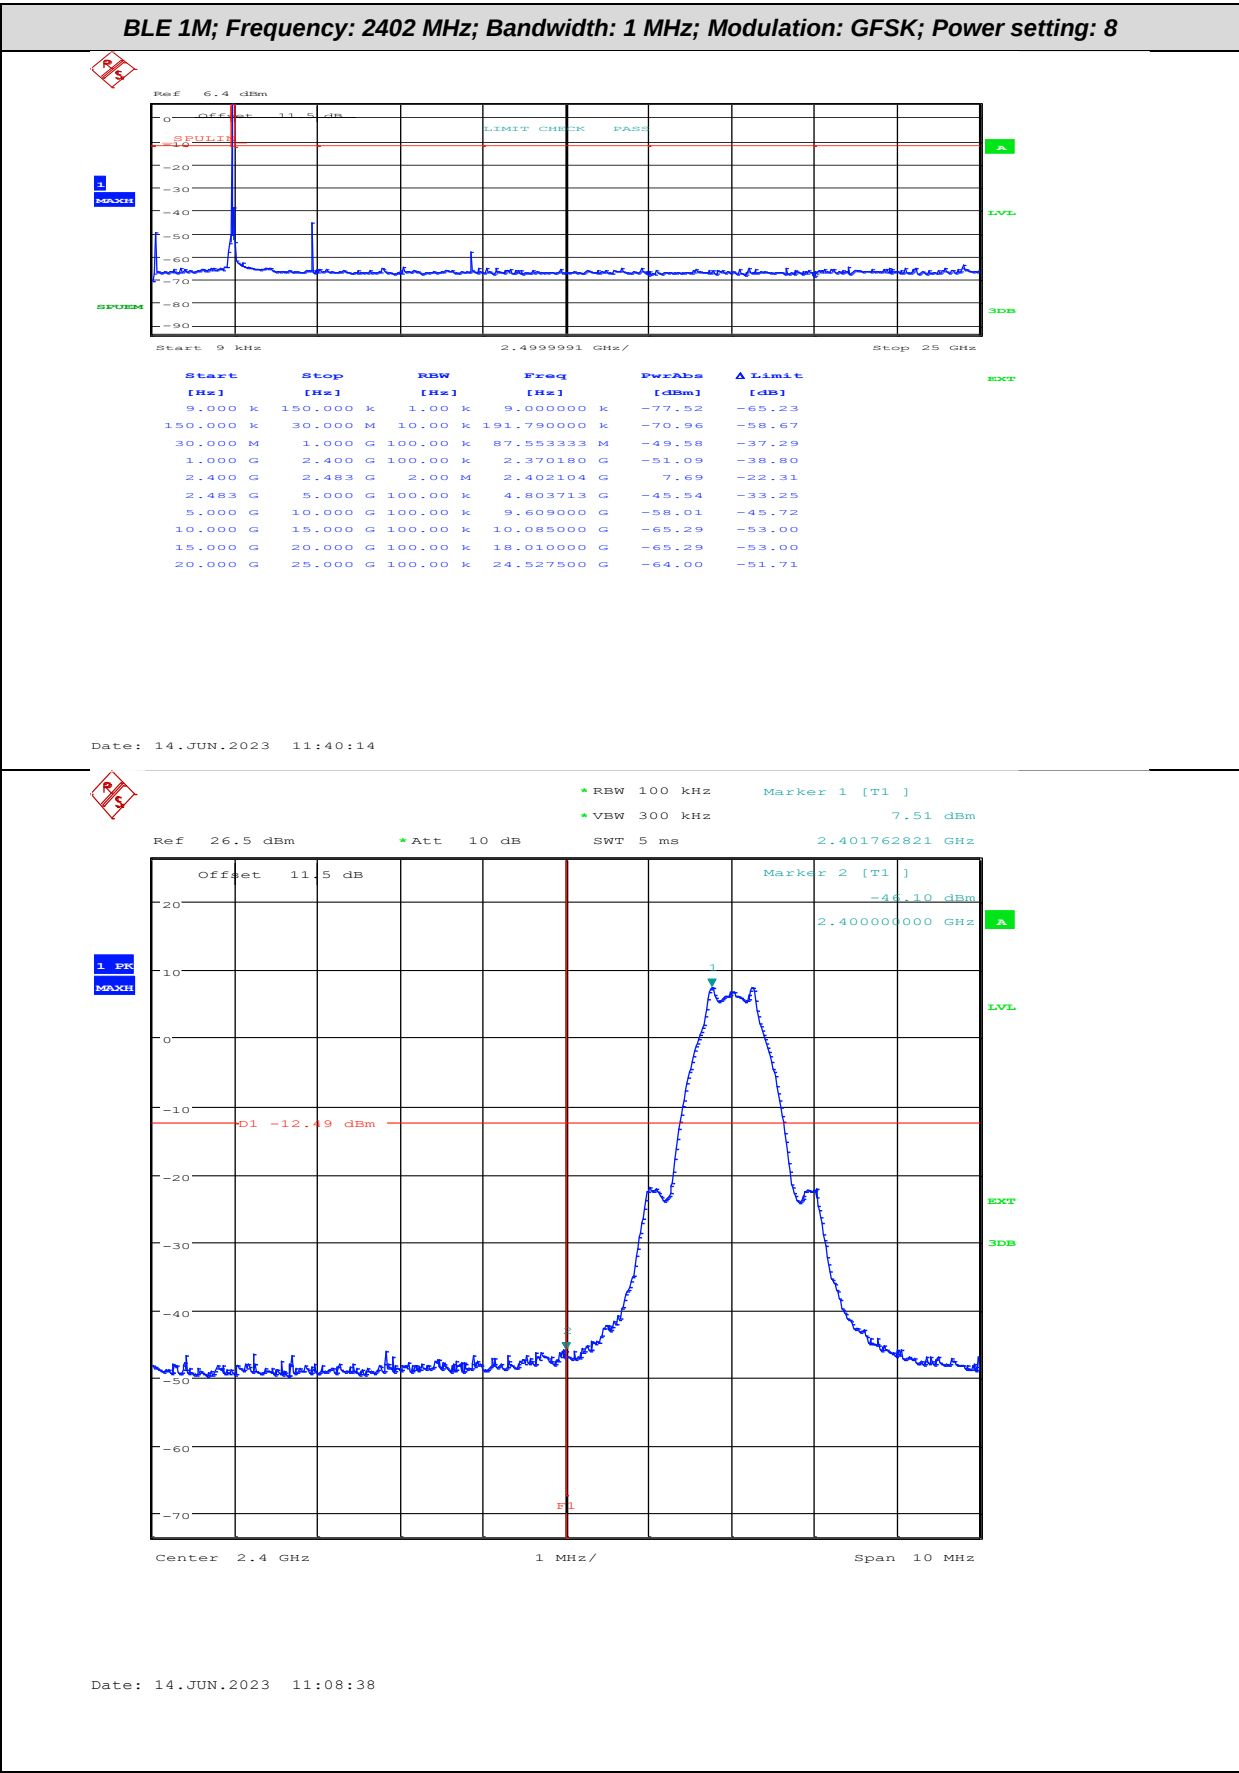


Date: 14.JUN.2023 11:08:38

BLE 1M; Frequency: 2442 MHz; Bandwidth: 1 MHz; Modulation: GFSK; Power setting: 8

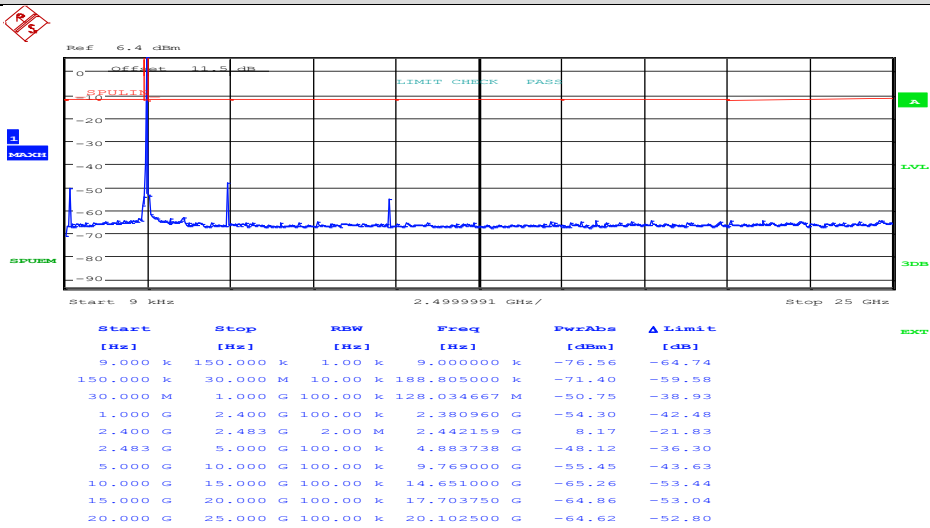


Date: 14.JUN.2023 11:27:19

BLE 1M; Frequency: 2480 MHz; Bandwidth: 1 MHz; Modulation: GFSK; Power setting: 8

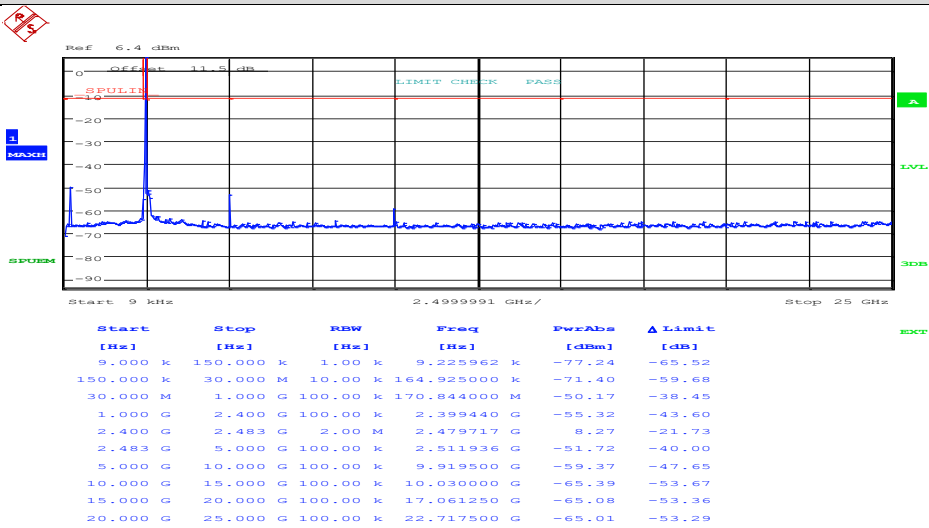

Date: 14.JUN.2023 11:22:03

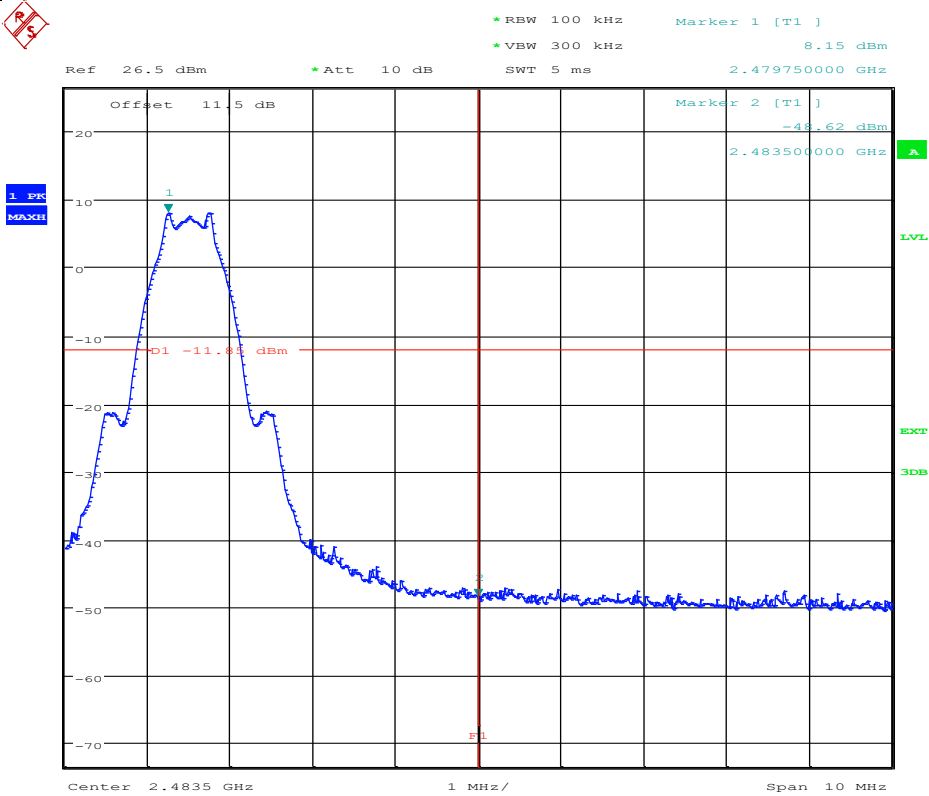

Date: 14.JUN.2023 11:04:54

## 15 Power spectral density

### 15.1 Definition

The power per unit bandwidth.

### 15.2 Test Parameters

|                                                              |                                |
|--------------------------------------------------------------|--------------------------------|
| Test Location:                                               | Element Skelmersdale           |
| Test Chamber:                                                | Radio Laboratory               |
| Test Standard and Clause:                                    | ANSI C63.10-2013, Clause 11.10 |
| EUT Frequencies Measured:                                    | 2402 MHz, 2442 MHz & 2480 MHz  |
| EUT Channel Bandwidths:                                      | 1 MHz                          |
| Deviations From Standard:                                    | None                           |
| Measurement BW:                                              | 3 kHz                          |
| Spectrum Analyzer Video BW:<br>(requirement at least 3x RBW) | 10 kHz                         |
| Measurement Span:<br>(requirement 1.5 times Channel BW)      | 1.1 MHz                        |
| Measurement Detector:                                        | Peak                           |

### Environmental Conditions (Normal Environment)

|                    |                                  |
|--------------------|----------------------------------|
| Temperature: 25 °C | +15 °C to +35 °C (as declared)   |
| Humidity: 45 % RH  | 20 % RH to 75 % RH (as declared) |

### 15.3 Test Limit


The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

15.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure vi, the peak emission of the EUT was measured on a spectrum analyser, with path losses taken into account.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst case configuration in each bandwidth.

Figure vi Test Setup




15.5 Test Equipment

| Equipment Type    | Manufacturer         | Equipment Description | Element No | Due For Calibration |
|-------------------|----------------------|-----------------------|------------|---------------------|
| Spectrum Analyser | R&S                  | FSU26                 | U405       | 2024-05-22          |
| Attenuator        | AtlanTecRF Microwave | 10dB SMA Attenuator   | U633       | Cal In use          |

15.6 Test Results


| Modulation: GFSK; Data rate: 1 Mbps; Power setting: 8 |                      |                 |             |        |
|-------------------------------------------------------|----------------------|-----------------|-------------|--------|
| Channel Frequency (MHz)                               | Analyzer Level (dBm) | Cable loss (dB) | Power (dBm) | Result |
| 2402                                                  | -14.88               | 11.50           | -3.38       | PASS   |
| 2442                                                  | -14.59               | 11.51           | -3.08       | PASS   |
| 2480                                                  | -14.66               | 11.52           | -3.14       | PASS   |

Cable loss includes SMA pigtail and balun PCBA which has a cable loss of 1.0dB, this is associated with the temporary antenna connector provided for test

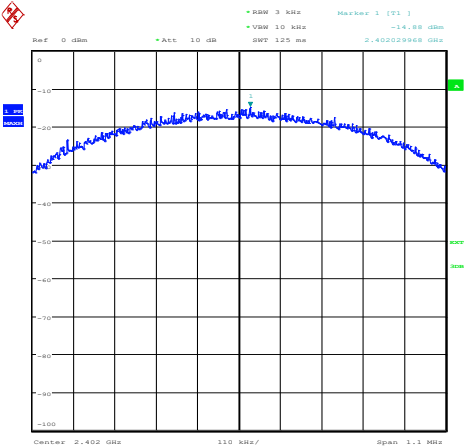


Date: 14 JUN 2023 10:51:06

2402 MHz

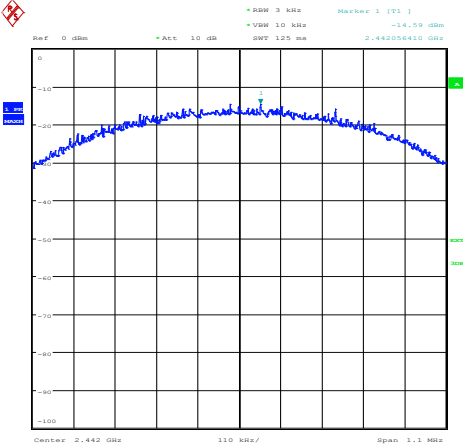

Date: 14 JUN 2023 10:43:40

2442 MHz

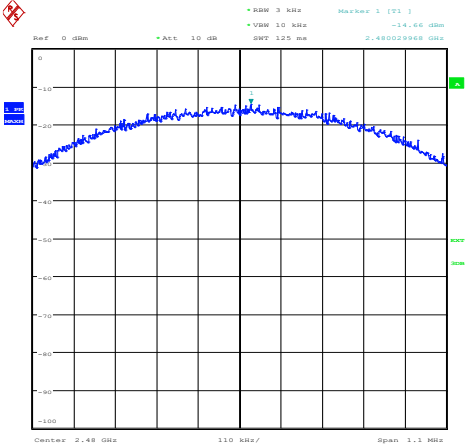

Date: 14 JUN 2023 10:58:24

2480 MHz

## 16 Measurement Uncertainty

### Radio Testing – General Uncertainty Schedule

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95 % confidence where no required test level exists.

| Test/Measurement                                                                                 | Budget Number | MU          |
|--------------------------------------------------------------------------------------------------|---------------|-------------|
| <b>Conducted RF Power, Power Spectral Density, Adjacent Channel Power and Spurious emissions</b> |               |             |
| Absolute RF power (via antenna connector) Dare RPR3006W Power Head                               | MU4001        | 0.9 dB      |
| Carrier Power and PSD - Spectrum Analysers                                                       | MU4004        | 0.9 dB      |
| Adjacent Channel Power                                                                           | MU4002        | 1.9 dB      |
| Transmitter conducted spurious emissions                                                         | MU4041        | 0.9 dB      |
| Conducted power and spurious emissions 40 GHz to 50 GHz                                          | MU4042        | 2.4 dB      |
| Conducted power and spurious emissions 50 GHz to 75 GHz                                          | MU4043        | 2.5 dB      |
| Conducted power and spurious emissions 75 GHz to 110 GHz                                         | MU4044        | 2.4 dB      |
|                                                                                                  |               |             |
| <b>Radiated RF Power and Spurious emissions ERP and EIRP</b>                                     |               |             |
| Effective Radiated Power Reverb Chamber                                                          | MU4020        | 3.7 dB      |
| Effective Radiated Power                                                                         | MU4021        | 4.7 dB      |
| TRP Emissions 30 MHz to 1 GHz using CBL6111 or CBL6112 Bilog Antenna                             | MU4046        | 5.3 dB      |
| TRP Emissions 1 GHz to 18 GHz using HL050 Log Periodic Antenna                                   | MU4047        | 5.1 dB      |
| TRP Emissions 18 GHz to 26.5 GHz using Standard Gain Horn                                        | MU4048        | 2.7 dB      |
| TRP Emissions 26.5 GHz to 40 GHz using Standard Gain Horn                                        | MU4049        | 2.7 dB      |
|                                                                                                  |               |             |
| <b>Spurious Emissions Electric and Magnetic Field</b>                                            |               |             |
| Radiated Spurious Emissions 30 MHz to 1 GHz                                                      | MU4037        | 4.7 dB      |
| Radiated Spurious Emissions 1-18 GHz                                                             | MU4032        | 4.5 dB      |
| E Field Emissions 18GHz to 26 GHz                                                                | MU4024        | 3.2 dB      |
| E Field Emissions 26GHz to 40 GHz                                                                | MU4025        | 3.3 dB      |
| E Field Emissions 40GHz to 50 GHz                                                                | MU4026        | 3.5 dB      |
| E Field Emissions 50GHz to 75 GHz                                                                | MU4027        | 3.6 dB      |
| E Field Emissions 75GHz to 110 GHz                                                               | MU4028        | 3.6 dB      |
| Radiated Magnetic Field Emissions                                                                | MU4031        | 2.3 dB      |
|                                                                                                  |               |             |
| <b>Frequency Measurements</b>                                                                    |               |             |
| Frequency Deviation                                                                              | MU4022        | 0.316 kHz   |
| Frequency error using CMTA test set                                                              | MU4023        | 113.441 Hz  |
| Frequency error using GPS locked frequency source                                                | MU4045        | 0.0413 ppm  |
|                                                                                                  |               |             |
| <b>Bandwidth/Spectral Mask Measurements</b>                                                      |               |             |
| Channel Bandwidth                                                                                | MU4005        | 3.87 %      |
| Transmitter Mask Amplitude                                                                       | MU4039        | 1.3 dB      |
| Transmitter Mask Frequency                                                                       | MU4040        | 2.59 %      |
|                                                                                                  |               |             |
| <b>Time Domain Measurements</b>                                                                  |               |             |
| Transmission Time                                                                                | MU4038        | 4.40 %      |
|                                                                                                  |               |             |
| <b>Dynamic Frequency Selection (DFS) Parameters</b>                                              |               |             |
| DFS Analyser - Measurement Time                                                                  | MU4006        | 679 $\mu$ s |
| DFS Generator - Frequency Error                                                                  | MU4007        | 92 Hz       |
| DFS Threshold Conducted                                                                          | MU4008        | 1.3 dB      |
| DFS Threshold Radiated                                                                           | MU4009        | 3.2 dB      |
|                                                                                                  |               |             |

| Test/Measurement                                         | Budget Number | MU            |
|----------------------------------------------------------|---------------|---------------|
| <b>Receiver Parameters</b>                               |               |               |
| EN300328 Receiver Blocking                               | MU4010        | <b>1.1 dB</b> |
| EN301893 Receiver Blocking                               | MU4011        | <b>1.1 dB</b> |
| EN303340 Adjacent Channel Selectivity                    | MU4012        | <b>1.1 dB</b> |
| EN303340 Overloading                                     | MU4013        | <b>1.1 dB</b> |
| EN303340 Receiver Blocking                               | MU4014        | <b>1.1 dB</b> |
| EN303340 Receiver Sensitivity                            | MU4015        | <b>0.9 dB</b> |
| EN303372-1 Image Rejection                               | MU4016        | <b>1.4 dB</b> |
| EN303372-1 Receiver Blocking                             | MU4017        | <b>1.1 dB</b> |
| EN303372-2 Adjacent Channel Selectivity                  | MU4018        | <b>1.1 dB</b> |
| EN303372-2 Dynamic Range                                 | MU4019        | <b>0.9 dB</b> |
| Receiver Blocking Talk Mode Conducted                    | MU4033        | <b>1.2 dB</b> |
| Receiver Blocking Talk Mode- radiated                    | MU4034        | <b>3.4 dB</b> |
| Rx Blocking, listen mode, blocking level                 | MU4035        | <b>3.2 dB</b> |
| Rx Blocking, listen mode, radiated Threshold Measurement | MU4036        | <b>3.4 dB</b> |
| Adjacent Sub Band Selectivity                            | MU4003        | <b>4.2 dB</b> |

## 17 RF Exposure

### 17.1 General SAR test reduction & exclusion guidance

#### KDB 447498

##### Section 4.3 General SAR test reduction and exclusion guidance

For Standalone SAR exclusion consideration, when SAR Exclusion Threshold requirement in KDB 447498 is satisfied, standalone SAR evaluation for general population exposure conditions by measurement or numerical simulation is not required.

The SAR Test Exclusion Threshold for frequencies in the range 100 MHz to 6 GHz, and for test separation distance of  $\leq 50$  mm, is determined as follows.

$$\text{SAR Exclusion Threshold (SARET)} = (\text{NT} \times \text{TSD}_A) / \sqrt{f_{\text{GHz}}}$$

Where,

NT = Numeric Threshold (3.0 for 1-g SAR and 7.5 for 10-g SAR)

TSD<sub>A</sub> = Minimum Test separation distance or 50 mm (whichever is lower)

f<sub>GHz</sub> = Transmit frequency in GHz

| <i>Channel Frequency<br/>(MHz)</i> | <i>Maximum<br/>Conducted Power<br/>(mW)</i> | <i>SAR Exclusion<br/>Threshold at 5 mm<br/>(mW)</i> | <i>SAR Evaluation</i> |
|------------------------------------|---------------------------------------------|-----------------------------------------------------|-----------------------|
| 2402                               | 5.90                                        | 9.68                                                | Not Required          |
| 2442                               | 6.71                                        | 9.60                                                | Not Required          |
| 2480                               | 6.73                                        | 9.53                                                | Not Required          |

Therefore standalone SAR evaluation for general population exposure conditions by measurement or numerical simulation is not required.

## 18 Appendix A – client declaration



Classification | **PRIVATE**

# TX Duty Cycle BLE 64 kbit/s Voice

GP570, GP870

Application Note

## 1 Introduction

This Application Note provides an explanation on the transmit duty cycle for a BLE device transmitting compressed voice with a data rate of 64 kbit/s. The transmit duty cycle can be used to calculate the average spurious emissions according section 15.35(C) of The FCC radio certification standard CRF 47 PART 15.

Information in this Application Note is applicable to the following integrated circuits (IC) products: GP570, GP870 [1].

### Table of Contents

|       |                                                                         |   |
|-------|-------------------------------------------------------------------------|---|
| 1     | Introduction .....                                                      | 1 |
| 2     | Background.....                                                         | 1 |
| 2.1   | Applicable Standard .....                                               | 1 |
| 2.2   | Duty Cycle Correction Spurious Emission According Section 15.35(c)..... | 2 |
| 3     | Duty Cycle 64 kbit/s Compressed Voice Streaming.....                    | 2 |
| 3.1   | Calculation.....                                                        | 2 |
| 3.2   | Measurement result.....                                                 | 2 |
| 3.2.1 | Test Setup.....                                                         | 2 |
| 3.2.2 | Test results.....                                                       | 3 |
|       | References .....                                                        | 8 |
|       | Important Notice .....                                                  | 8 |
|       | Document History .....                                                  | 8 |

## 2 Background

To place a BLE device on the US market it requires FCC certification.

### 2.1 Applicable Standard

CRF 47 PART 15, Section 15.247 "Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz". See ref [4].

The Qorvo BLE device complies with 15.247 (a) (2): Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

For spurious emissions 15.247 is pointing towards 15.205 "Restricted bands of operation" and towards 15.209 "Radiated emission limits, general requirements".

Please notice that 15.209 (d) mentions: "Radiated emission limits in these three bands are based on measurements employing an average detector." Averaging can be done by choosing a narrow video bandwidth setting on the spectrum analyzer or by averaging multiple traces.

© 2021 Qorvo US, Inc.

Qorvo Confidential & Proprietary Information

GP\_P905\_AN\_13659 Version 1.02; Subject to change without notice.

Page 1 of 8

[www.qorvo.com](http://www.qorvo.com)



## 2.2 Duty Cycle Correction Spurious Emission According Section 15.35(c)

Section 15.35 (c) mentions: "Unless otherwise specified,...., when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to Supplier's Declaration of Conformity."

Details on applying duty cycle correction can be found in ref [6], in the "Frequently Asked Questions" section at "Question 3", "Answer 3 c)". This answer explains that duty cycle correction of average spurious emissions for protocol limited devices is allowed under the condition that the average spurious emissions are measured with a continuous wave signal.

Quote;

*"Taking a RMS average measurement while EUT is transmitting continuously, i.e., greater than 98%, and correcting for operational duty cycle – When greater than 98% duty cycle is achieved for testing purposes, applying average measurement techniques (e.g., average detector / reduced VBW) then adjusting for the protocol limited duty factor to determine the average emission is acceptable."*

## 3 Duty Cycle 64 kbit/s Compressed Voice Streaming

The 64 kbit/s compressed voice streaming is for most applications the transmit scenario that has the highest TX duty cycle, so producing the highest average TX spurious emission.

### 3.1 Calculation

For sending **64 kbit/s compressed voice** on a 10 ms connection interval and using the 1 Mbit/s PHY on short packets (BT v4.0 compliant)

- Payload size: 20 bytes
- Packet size: 41 bytes
- Connection Interval: 10 ms
- Number of packets per connection interval: 4
- Throughput:  $4 * 8 * 20 / 10 = 64$  kbit/s
- Transmit time:  $4 * 8 * (41) = 1312$   $\mu$ s  
(1 bit takes 1  $\mu$ s transmit at 1 Mbit/s; 20 bytes payload in a 41 bytes packet)
- Calculated Duty cycle is  $1312 \mu\text{s} / 10 \text{ ms} = 1312/10000 = 0.13$

### 3.2 Measurement Result

#### 3.2.1 Test Setup

Figure 1 shows the test setup to measure the duty cycle of voice transmission over BLE. Attenuator is added at the master side to suppress transmission levels from the GP570 master. BLE remote control is being emulated by GP570 slave.



Classification | **PRIVATE**  
**TX Duty Cycle BLE 64 kbit/s Voice**  
 GP570, GP870

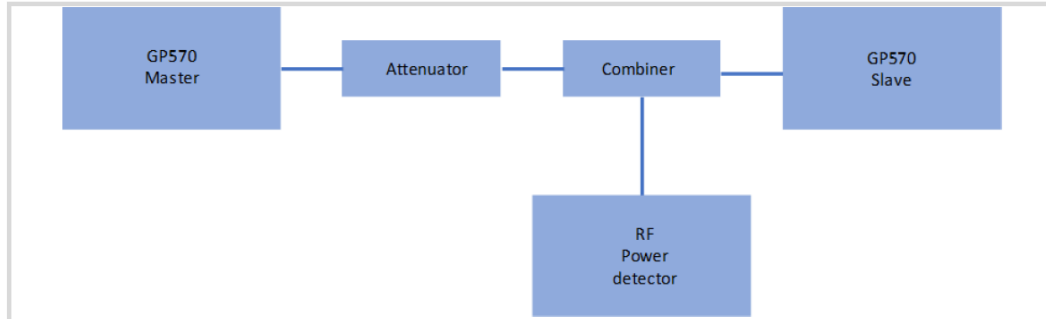


Figure 1 : Test Setup

## 3.2.2 Test results

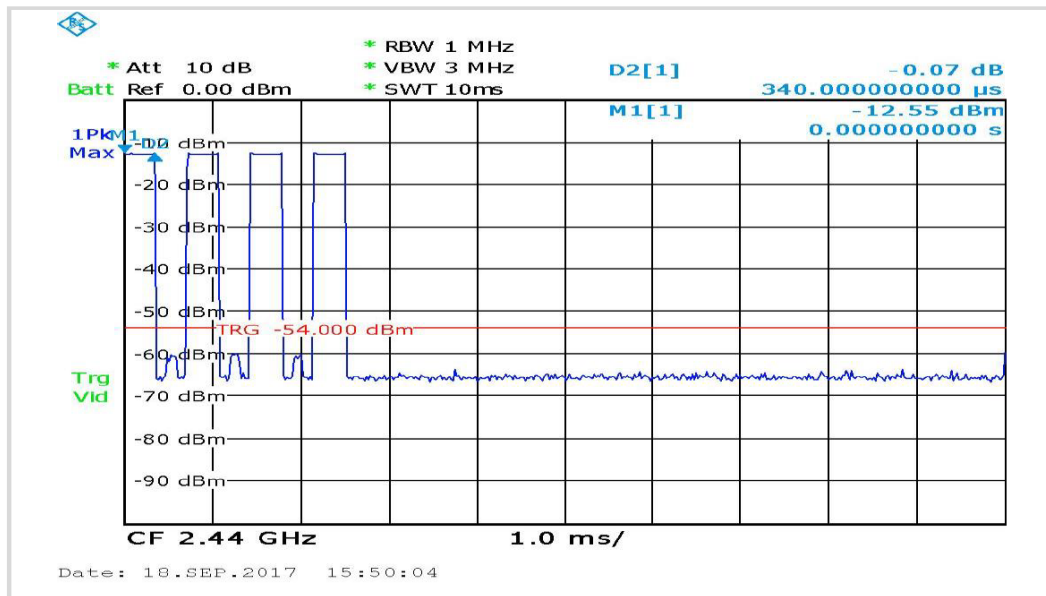


Figure 2 : Spectrum Analyzer Capture of Compressed Voice Transmission over BLE for 10 ms Sweep Time


© 2021 Qorvo US, Inc.

Qorvo Confidential &amp; Proprietary Information

GP\_P905\_AN\_13659 Version 1.02; Subject to change without notice.

Page 3 of 8

[www.qorvo.com](http://www.qorvo.com)

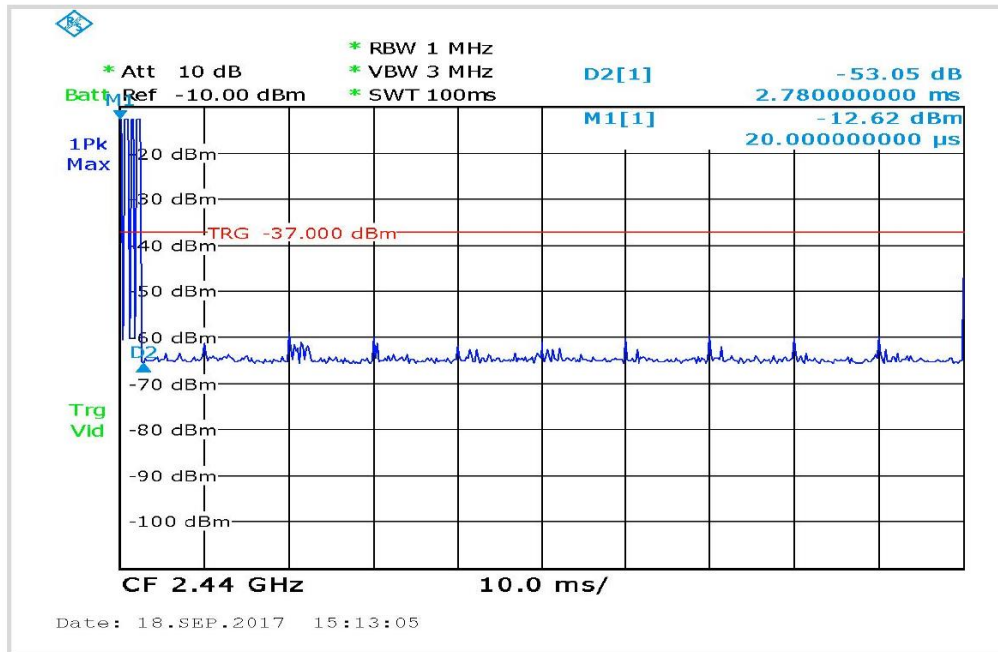

**Figure 3 :Spectrum Analyzer Capture of Compressed Voice Transmission over BLE for 100 ms Sweep Time**

In Figure 2 and in Figure 3 low level packets are sent by the master, and 4 high level packets containing voice data are sent by the slave.

Figure 2 shows there are 4 voice packets transmitted of 340  $\mu$ s length each.

Total TX duration:  $4 \cdot 340 \mu\text{s} = 1360 \mu\text{s}$ ; the difference between the calculated  $1312 \mu\text{s}$  and the measured  $1360 \mu\text{s}$  can be explained by TX ramp times of the 4 packets.

Figure 3 shows the same 4 voice packets on a different time scale. The reason we do not see (in Figure 3) a new pulse train each 10 ms is explained by hopping: for the next 10 ms connection interval the device hops to another BLE frequency.



Classification | **PRIVATE**  
**TX Duty Cycle BLE 64 kbit/s Voice**  
 GP570, GP870



**Figure 4 : Oscilloscope Graph of 10 ms Connection Interval**

The measurement in Figure 4 is done with a broadband detector, measuring all BLE frequencies. This figure shows that the connection interval is 10 ms (see BX-AX)



**Figure 5 : Oscilloscope Graph 10 ms/div so 120 ms Interval**

The measurement in Figure 5 is also done with a broadband detector, measuring all BLE frequencies. This figure shows that the connection interval of 10 ms is repeated during a > 100 ms time period.

© 2021 Qorvo US, Inc.

Qorvo Confidential & Proprietary Information

GP\_P905\_AN\_13659 Version 1.02; Subject to change without notice.

Page 5 of 8

[www.qorvo.com](http://www.qorvo.com)



Classification | **PRIVATE**  
**TX Duty Cycle BLE 64 kbit/s Voice**  
 GP570, GP870



**Figure 6 : Oscilloscope Graph 100 ms/div so 1,200 ms Interval**

The measurement in Figure 6 is also done with a broadband detector, measuring all BLE frequencies. This figure shows that the connection interval of 10 ms is repeated during a > 1000 ms period.

The period time of 10 ms of the high amplitude voice pulses and the pulse duration of  $4 * 0.34$  ms can be used to calculate the duty cycle for compressed voice transmission. The pattern repeats over the duration of a voice call and is representative for the max duty cycle in a 100 ms time slot.

**TX Duty cycle:  $1.360/10 = 13.6\%$**

**Corresponding FCC duty cycle correction factor is  $20 * \log_{10}(0.1360) = -17.32$  dB.**

It is also possible to calculate the max duty cycle for an individual BLE channel.

The BLE standard requires a minimum number of used channels of 2, see 4.5.8.1 Channel Classification in ref [5]. The pulses or the TX power will be equally spread over the 2 channels, so the max duty cycle per individual channel will be  $-17.32 - 6 = -23.32$  dB. FCC will limit the correction factor to -20 dB.

Summary:

- Max TX duty cycle all channels combined: 13.6 %, corresponding correction factor -17.3 dB
- Max TX duty cycle per channel:  $\frac{1}{2} * 13.6\%$ , corresponding correction factor -23.3 dB, limited by FCC to -20 dB. (minimum # channels is 2)

### 3.3 Out of Range

Before a BLE slave is allowed to transmit, it must receive the master first. This applies for every individual connection event.

If the master is not hearing the slave, it must close the current connection event and retry in the next connection event.

If the BLE slave (remote control) is not receiving an ACK's from the master, it will retransmit the not ACK-ed packet. However, per specification connection events must close after receiving 2 subsequent packets with a CRC error. So, if missing 2 subsequent ACKs the slave will close the connection event. Means instead of

© 2021 Qorvo US, Inc.

Qorvo Confidential & Proprietary Information

GP\_P905\_AN\_13659 Version 1.02; Subject to change without notice.

Page 6 of 8

[www.qorvo.com](http://www.qorvo.com)



Classification | **PRIVATE**  
**TX Duty Cycle BLE 64 kbit/s Voice**  
GP570, GP870

many packets per connection event you will see typically max 2 packets per connection event when going out of range. TX duty cycle normally reduces when going out of range.

© 2021 Qorvo US, Inc.

Qorvo Confidential & Proprietary Information

GP\_P905\_AN\_13659 Version 1.02; Subject to change without notice.

Page 7 of 8

[www.qorvo.com](http://www.qorvo.com)



Classification | **PRIVATE**  
**TX Duty Cycle BLE 64 kbit/s Voice**  
 GP570, GP870

## References

- [1] GP570 Data Sheet; Qorvo document GP\_P008\_UM\_13489  
 GP870 Data Sheet; Qorvo document GP\_P008\_UM\_12059
- [2] GP570 User Manual; Qorvo document GP\_P008\_UM\_10929  
 GP870 User Manual; Qorvo document GP\_P008\_UM\_12313
- [3] FCC Certification Guide; GP\_P905\_UM\_13440; Qorvo document GP\_P905\_ GP\_P905\_UM\_13440
- [4] Electronic Code of Federal Regulations: eCRF Title 47, Part 15 – Radio Frequency Devices.
- [5] BLEUETOOTH SPECIFICATION Version 4.2 [Vol 6, Part B], Link Layer specification.
- [6] FCC Publication Number FCC 558074 D01 15.247 Meas Guidance v05r02.pdf

## Important Notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2017, 2018, 2019, 2020, 2021 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.

## Document History

| Version | Date          | Section   | Changes                                                                                                                                                   |
|---------|---------------|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0.10    | 14 Sept 2017  | all       | Initial Release.                                                                                                                                          |
| 0.20    | 15 Sept. 2017 |           | Added measurement results                                                                                                                                 |
| 0.30    | 18 Sept. 2017 |           | Corrected figure 2, added figure 3, updated text. No change in calculations or duty cycle.                                                                |
| 0.40    | 19 Sept 2017  |           | Added figure 5 and figure 6 to further clarify max duty cycle.<br>Included calculation for duty cycle for minimum number of BLE channels. (paragraph 3.4) |
| 1.00    | 1 Feb 2018    | all       | Editorial corrections.                                                                                                                                    |
| 1.01    | 1 June 2020   | 3.3 (new) | Added Out of Range information                                                                                                                            |
| 1.02    | 10 Feb 2021   | 2.2       | Updated paragraph 2.2 "Duty Cycle Correction Spurious Emission According Section 15.35(c)"                                                                |

© 2021 Qorvo US, Inc.

Qorvo Confidential & Proprietary Information

GP\_P905\_AN\_13659 Version 1.02; Subject to change without notice.

Page 8 of 8

[www.qorvo.com](http://www.qorvo.com)