

TEST REPORT

Report Number: 3081013DAL-001

Project Number: 3081013

Evaluation of the

Wireless MODEM

Model Number: EDG0200

FCC ID: MIVEDG0200

FCC Part 2

FCC Part 15

FCC Part 22 Subpart H

FCC Part 24 Subpart E

For

Enfora

Test Performed by:


Intertek
420 N Dorothy Drive
Richardson, TX 75081

Test Authorized by:

Enfora
661 E. 18th Street
Plano, TX 75074

Prepared By:  Date: 9-16-05

Sudesh Kamble, EMC Team Leader

Approved By:  Date: 9-16-05

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested.

This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek

420 N Dorothy Drive, Richardson, TX 75081



TABLE OF CONTENTS

1	JOB DESCRIPTION	4
1.1	GENERAL INFORMATION	4
1.1.1	<i>System Support Equipment</i>	5
1.1.2	<i>Cables associated with EUT</i>	5
1.1.3	<i>System Block Diagram</i>	5
1.1.4	<i>Mode(s) of operation</i>	5
2	EXECUTIVE SUMMARY	6
	EQUIPMENT UNDER TEST: WIRELESS MODEM MODEL EDG0100	6
3	TEST FACILITY	7
3.1	TEST EQUIPMENT USED	8
4	CONDUCTED RF POWER	9
4.1	TEST PROCEDURE	9
4.2	TEST RESULTS	9
5	RADIATED RF POWER	10
5.1	TEST LIMITS	10
5.2	TEST PROCEDURE	10
5.3	TEST RESULTS	11
6	EMISSION LIMITATIONS, OCCUPIED BANDWIDTH	12
6.1	TEST LIMITS	12
6.2	TEST PROCEDURE	12
6.3	TEST RESULTS	12
7	OUT OF BAND EMISSION AT ANTENNA TERMINALS	19
7.1	TEST LIMITS	19
7.2	TEST PROCEDURE	19
7.3	TEST RESULTS	20
8	FIELD STRENGTH OF SPURIOUS RADIATION	29
8.1	TEST LIMITS	29
8.2	TEST PROCEDURE	29
8.3	TEST RESULTS	29

9	POWER LINE CONDUCTED EMISSIONS	32
9.1	TEST LIMITS	32
9.2	TEST PROCEDURE.....	32
9.3	TEST RESULTS	33
10	RECEIVER SPURIOUS EMISSIONS	35
10.1	TEST LIMITS	35
10.2	TEST PROCEDURE.....	35
10.3	TEST RESULTS	36
11	FREQUENCY STABILITY VS TEMPERATURE.....	37
11.1	TEST LIMITS	37
11.2	TEST PROCEDURE.....	37
11.3	TEST RESULTS	37
12	FREQUENCY STABILITY VS VOLTAGE.....	38
12.1	TEST LIMITS	38
12.2	TEST PROCEDURE.....	38
12.3	TEST RESULTS	38
13	TEST SET UP PICTURES.....	39
13.1	RADIATED EMISSIONS	39
13.2	AC LINE CONDUCTED EMISSIONS	40
14	EUT PICTURES	41

Evaluation For: Enfora
Model No: EDG0200

FCC ID: MIVEDG0200

1 JOB DESCRIPTION

1.1 General Information

Applicant Name / Address:	Enfora 661 E. 18 th Street, Plano, TX 75074
Name of contact:	Scott Yarberry
Telephone:	001 972 663-4400
Fax:	001 972 663-4444

FCCID	MIVEDG0200	
Product	Wireless MODEM	
EUT Model Number	EDG0200	
EUT Serial Number	None	
Quantity Production Planned	Quantity production is planned.	
Modulation(s)	GSM 1900 and GSM 850	
Emission Designators	300KGXW; 300KG7W	
Frequency Tolerance	± 2.5 ppm	
Maximum conducted power averaged over burst duration	33.2 dBm (GSM 850 band); 29.0 dBm (GSM 1900 band)	
Frequency Range	FCC Rules 22H 24E	Freq.(MHz) 824.0 – 849.0 1850.0 – 1910.0
Antenna & Gain	Integral antenna	
DC voltage and current into the final RF stage	4 V, 1.5 A	
Detachable Antenna	No	
Related Submittals / Grants	None	
EUT receive date:	08/18/2005	
EUT receive condition:	The EUT was received in good condition with no apparent damage.	
Test start date:	08/18/2005	
Test completion date:	09/08/2005	
FCC Rule Part(s)	FCC Part 22 Subpart H, Part 24 Subpart E, Part 15, Part 2	
Industry Canada Rule Part(s)	RSS-132, RSS-133, ICES-003	
Modifications Required For Compliance	No modifications were implemented by the Intertek staff.	

The test results in this report pertain only to the item tested.

1.1.1 System Support Equipment

Table 1-1 contains the details of the support equipment associated with the Equipment Under Test during the FCC Part 15 testing.

Table 1-1: System Support Equipment

Description	Manufacturer	Model Number	Serial Number
AC Adapter	CUI STACK	DV-091A-5720	DPD090100-P5-TC
PC	Toshiba	430CDT	03721952
Test Jig	ENFORA	SDK0107MG101 Rev B	0038
Laptop PC	ACER	ASPIRE 3500- 3502WLCI	LXA500510052007 EFEM00
AC/DC Adapter for Laptop	LITEON	PA-1650-02	5411294905

1.1.2 Cables associated with EUT


Table 1-2 contains the details of the cables associated with the EUT.

Table 1-2: Interconnecting cables between modules of EUT

Cables					
Description	Length	Shielding	Ferrites	Connection	
				From	To
DC Power Cord	5 ft	None	None	AC Power Adapter	Test Jig

1.1.3 System Block Diagram

The diagram shown below details the interconnection of the EUT and its accessories during FCC Part 15 testing. For specific layout, refer to the test configuration photograph in the relevant section of this report.

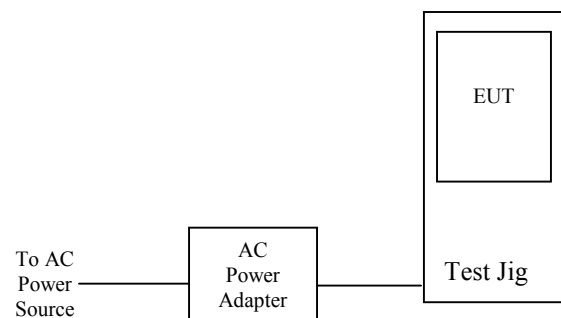

1.1.4 Mode(s) of operation

The Wireless MODEM was powered by the AC to DC power supply provided with the sample and tested in the stand alone configuration.

Evaluation For: Enfora
Model No: EDG0200

FCC ID: MIVEDG0200

The appliance under test was operated with **GMSK modulation mode** during the testing and not on 8-PSK modulation mode. During the initial investigation on antenna conducted power; GMSK modulation mode was higher than 8PSK mode.

2 EXECUTIVE SUMMARY

Testing performed for: Enfora

Equipment Under Test: Wireless Modem Model EDG0100

FCC RULE	IC RULE	DESCRIPTION OF TEST	RESULT	PAGE	Test Date
§2.1046	RSS-132 §6.4 RSS-133 §6.2	RF Power Output	Compliant	9	09/07/05
§22.913, §24.232	RSS-132 §6.4 RSS-133 §6.2	ERP, EIRP	Compliant	10	08/19/05- 08/20/05
§2.1049 §22.917(b)(d)	RSS-132 §6.5 RSS-133 §6.3	Emission Limitation, Occupied Bandwidth	Compliant	12	09/08/05
§2.1051 §22.917(e) §22.917(f) §24.238(a)	RSS-132 §6.5 RSS-133 §6.3	Out of Band Emissions at Antenna Terminals	Compliant	19	09/07/05
§2.1053, §22.917, §24.238	RSS-132 §6.6	Field Strength of Spurious Radiation	Compliant	29	08/19/05
§15.107, §15.207	IC ES-003	Power Line Conducted Emissions	Compliant	32	08/25/05
§15.109, §15.209	IC ES-003 RSS-132 §6.6 RSS-133 §9	Receiver Spurious Emission	Compliant	35	08/18/05
§2.1055, §22.355, §24.235	RSS-132 §6.3 RSS-133 §7	Frequency Stability vs. Temperature	Compliant	37	08/24/05
§2.1055, §22.355, §24.235	--	Frequency Stability vs. Voltage	Compliant	38	08/24/05

N/S: Not under scope of this evaluation

3 TEST FACILITY

The INTERTEK-Lexington is located at 420 N Dorothy Drive, Richardson, TX 75081. The radiated emission test site is a 3-meter semi-anechoic chamber. The chamber meets the characteristics of CISPR 16-1: 1993 and ANSI C63.4: 1992. For measurements, a remotely controlled flush-mount metal-top turntable is used to rotate the EUT a full 360 degrees. A remote controlled non-conductive antenna mast is used to scan the antenna height from one to four meters.

The FCC site registration number for this site is 10157.

The Industry Canada file no. is IC 6018.

Evaluation For: Enfora
Model No: EDG0200

FCC ID: MIVEDG0200

3.1 Test Equipment Used

Description	Manufacturer	Model Number	Serial Number	Calibration due date	Eqpt. ID
Signal Generator	Rohde & Schwarz	ESI 7	100044	10/11/05	77
Environmental Chamber	Thermotron	SE-600-5-5	29513	12/21/05	124
EMI Receiver	Rohde & Schwarz	ESI 7	100044	10/11/05	77
Spectrum Analyzer	Agilent Technologies	E7405A	US40240235	11/22/05	87
Horn Antenna	EMCO	3115	00031626	03/09/06	000692
Horn Antenna	AH Systems	SAS 571	411	05/24/06	86
Bi-coniLog Antenna	Schaffner	CBL6112B	2726	06/06/06	82
Antenna	CDI	B100	523	06/07/06	195
Antenna	CDI	B200	533	06/07/06	195
Antenna	CDI	B300	1651	06/07/06	195
RF Cable	custom made	#1	none	07/28/06	128
RF Cable	Custom made	#4	none	07/28/06	131
RF Cable	Custom made	#3	none	07/28/06	130
RF Cable	Custom made	ID 245	none	07/28/06	245
Preamplifier	Miteq, Inc.	AMF-4D-001180-24-10P	1020106	09/07/05	222
Attenuator	JFW	50FHC-020-20	50FHC-020-20	VBU	223
Digital Multimeter	Fluke	8060A	6636042	06/21/06	11
Power Meter	HP	HP 437 B	3125U22393	08/16/06	95
Frequency Counter	HP	5386A	3206A03335	05/19/06	000689
LISN	FCC	FCC-LISN-50-25-2-01	1020	06/02/06	91
Base Station Simulator	Agilent	8960 Series 10, E5515B	GB40350240	12/10/06	N/A
DMM	Fluke	52	72850141	01/03/2006	28
DC Power supply	Topward P.S.	33010D	697464	VBU	106

Note: The calibration due dates of test equipments used are noted as on the day of testing.

4 CONDUCTED RF POWER

FCC Rule: §2.1046

IC Rule: RSS-132 §6.4 and RSS-133 §6.2

4.1 Test Procedure

The transmitter output was connected to a calibrated coaxial cable. The EUT was set to its maximum power setting. The EUT was placed into a call and the transmitter output was read off the Power meter in dBm. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss.

Tests were performed at three frequencies (low, middle, and high channels) and on the highest power levels, which can be setup on the transmitters.

The transmission was exercised in burst mode to generate maximum power, the power was averaged shall be averaged over the burst duration, during which its power value is at its maximum. The power measurement was averaged only over the durations of actual transmission. Gated Average detector was used during transmitted and out of band power measurements.

EUT's internal test mode was accesses and programmed by an external PC for operation.

4.2 Test Results

The EUT met the RF power output requirements of FCC Part 22 Subpart H and FCC Part FCC Part 24 Subpart E. The test results are located in Table 4-1.

Table 4-1 RF Power Variation with temperature

Power Variation (peak) Vs. Temperature (dBm)						
Temp. (Celcius)	GSM 850 Channel #			GSM 1900 Channel #		
	128	190	251	512	662	810
60	-0.56	-0.57	-0.58	-1.80	-1.84	-1.84
20	0.00	0.00	0.00	0.00	0.00	0.00
-30	0.40	0.46	0.47	1.96	2.16	2.22

Power (Avg.) at ambient (dBm)							
Modulation	Temp. (Celcius)	GSM 850 Channel #			GSM 1900 Channel #		
		128	190	251	512	662	810
GMSK	20	33.16	33.16	32.88	29.02	29.00	28.50
8PSK	20	28.43	27.62	27.55	24.97	24.04	23.51

NOTE: Maximum conducted output power, averaged over the entire duty cycle:

9.7 dBm (GSM 850 Band); 5.8 dBm (GSM 1900 Band).

5 RADIATED RF POWER

FCC Rule §22.913

FCC Rule §24.232; RSS-133 §6.2

RSS-132 §6.4

5.1 Test Limits

For the GSM Cell band the Effective Radiated Power (ERP) of mobile transmitters was not allowed to exceed 7 Watts. For the GSM band the Equivalent Isotropic Radiated Power (EIRP) was not allowed to exceed 2 Watts.

5.2 Test Procedure

The EUT was placed on a non-conductive turntable. The EUT was set to its maximum power setting. The radiated emission at the fundamental frequency was measured at 3m with a test antenna and EMI receiver. This was performed with the antenna in both vertical and horizontal polarities.

During the measurement of the EUT, the receiver resolution bandwidth was set to 3 MHz and the video bandwidth was set to 3 MHz. The highest emission was recorded with the rotation of the turntable and the raising and lowering of the test antenna. The receiver reading was recorded (E in dBm).

ERP in the Cell band and EIRP in the GSM band were measured using a substitution method as described in TIA-603-B Section 2.2.17 (Radiated Power Output). The EUT was replaced with a substitution antenna (biconical antenna below 1 GHz; Horn antenna above 1 GHz) and was fed with an input power of 0 dBm. The receiver reading was recorded and EIRP was calculated as follows:

$$\text{EIRP} = E_1 - E_2 + V_{\text{sub}} + G_{(\text{dBi})}$$

$$\text{ERP} = E_1 - E_2 + V_{\text{sub}} + G_{(\text{dBd})}$$

where,

E_1 is the receiver reading in dBμV/m when measuring the field strength of the EUT

E_2 is the receiver reading in dBμV/m when measured field strength from the generator

V_{sub} is the power delivered to the substitution antenna (generator output in dBm – cable loss between the generator and the substitution antenna)

G is the gain of the transmitting antenna in dBi or dBd.

5.3 Test Results

The EUT met the radiated power requirements of FCC §24.232. The test results are located in Table 5-1. The maximum EIRP for the GSM 1900 band was 27.929 dBm. The maximum ERP for the GSM 850 band was 24.728 dBm.

Table 5-1 Radiated RF Power

GMSK Mode

EUT Mode	Channel	Polarity	Freq. (MHz)	Device Reading Peak (dBuV/m)	Sub Reading (dBuV/m)	Cable Loss (dB)	Tx Antenna Gain (dBi)	Signal Generator Output (dBm)	ERP (dBm)
GSM 850	128	H	824.201	125.810	99.489	3.484	4.041	0.000	24.728
	190	H	836.625	125.880	100.417	3.529	4.046	0.000	23.830
	251	H	848.801	124.470	99.649	3.554	4.050	0.000	23.167
GSM 850	128	V	824.201	123.900	100.184	3.482	4.041	0.000	22.125
	190	V	836.625	124.220	101.361	3.528	4.046	0.000	21.227
	251	V	848.801	123.900	100.863	3.554	4.050	0.000	21.383

Max ERP = 297 mW

GMSK Mode

EUT Mode	Channel	Polarity	Freq. (MHz)	Device Reading Peak (dBuV/m)	Sub Reading (dBuV/m)	Cable Loss (dB)	Tx Antenna Gain (dBi)	Signal Generator Output (dBm)	EIRP (dBm)
GSM 1900	512	H	1849.97	121.757	101.33	5.007	6.95	0	22.37
	662	H	1880	123.657	100.89	5.051	6.98	0	24.696
	810	H	1909.8	122.034	101.491	5.093	7.01	0	22.46
GSM 1900	512	V	1850.04	126.863	100.98	5.007	6.95	0	27.826
	662	V	1880.01	126.299	100.299	5.051	6.98	0	27.929
	810	V	1909.64	125.348	100.05	5.093	7.009	0	27.214

Max EIRP = 620 mW

8PSK Mode

EUT Mode	Channel #	Frequency (MHz)	Max ERP	Max EIRP
GSM 850	128	824.201	20.00 dBm (100 mW)	N/A
GSM 1900	512	1850.04	N/A	23.88 dBm (244 mW)

6 EMISSION LIMITATIONS, OCCUPIED BANDWIDTH

CFR 47 §2.1049

RSS-132 §6.5; RSS-133 §6.3

6.1 Test Limits

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

6.2 Test Procedure

In both GSM and GSM modes the antenna port of the EUT was connected to a spectrum analyzer using a calibrated coaxial cable and power divider. The EUT was placed maximum power using the support computer. The MODEM was set to force the EUT to its maximum power setting. The occupied bandwidth function of the analyzer was used to automatically generate the occupied bandwidth plots below.

EUT's internal test mode was accessed and programmed by an external PC for operation.

6.3 Test Results

The following is the occupied bandwidth data for the EUT.

Table 6-1: Occupied bandwidth measurements

Mode	Channel	Resolution Bandwidth	Video Bandwidth	Sweep time	Measured Bandwidth kHz
GSM 850	128	3KHz	3KHz	5s	252.50
	190	3KHz	3KHz	5s	256.51
	251	3KHz	3KHz	5s	252.50
GSM 1900	512	3KHz	3KHz	5s	252.50
	662	3KHz	3KHz	5s	256.51
	810	3KHz	3KHz	5s	256.51

Evaluation For: Enfora
Model No: EDG0200

FCC ID: MIVEDG0200

Figure 6-1: Occupied Bandwidth – GSM 128

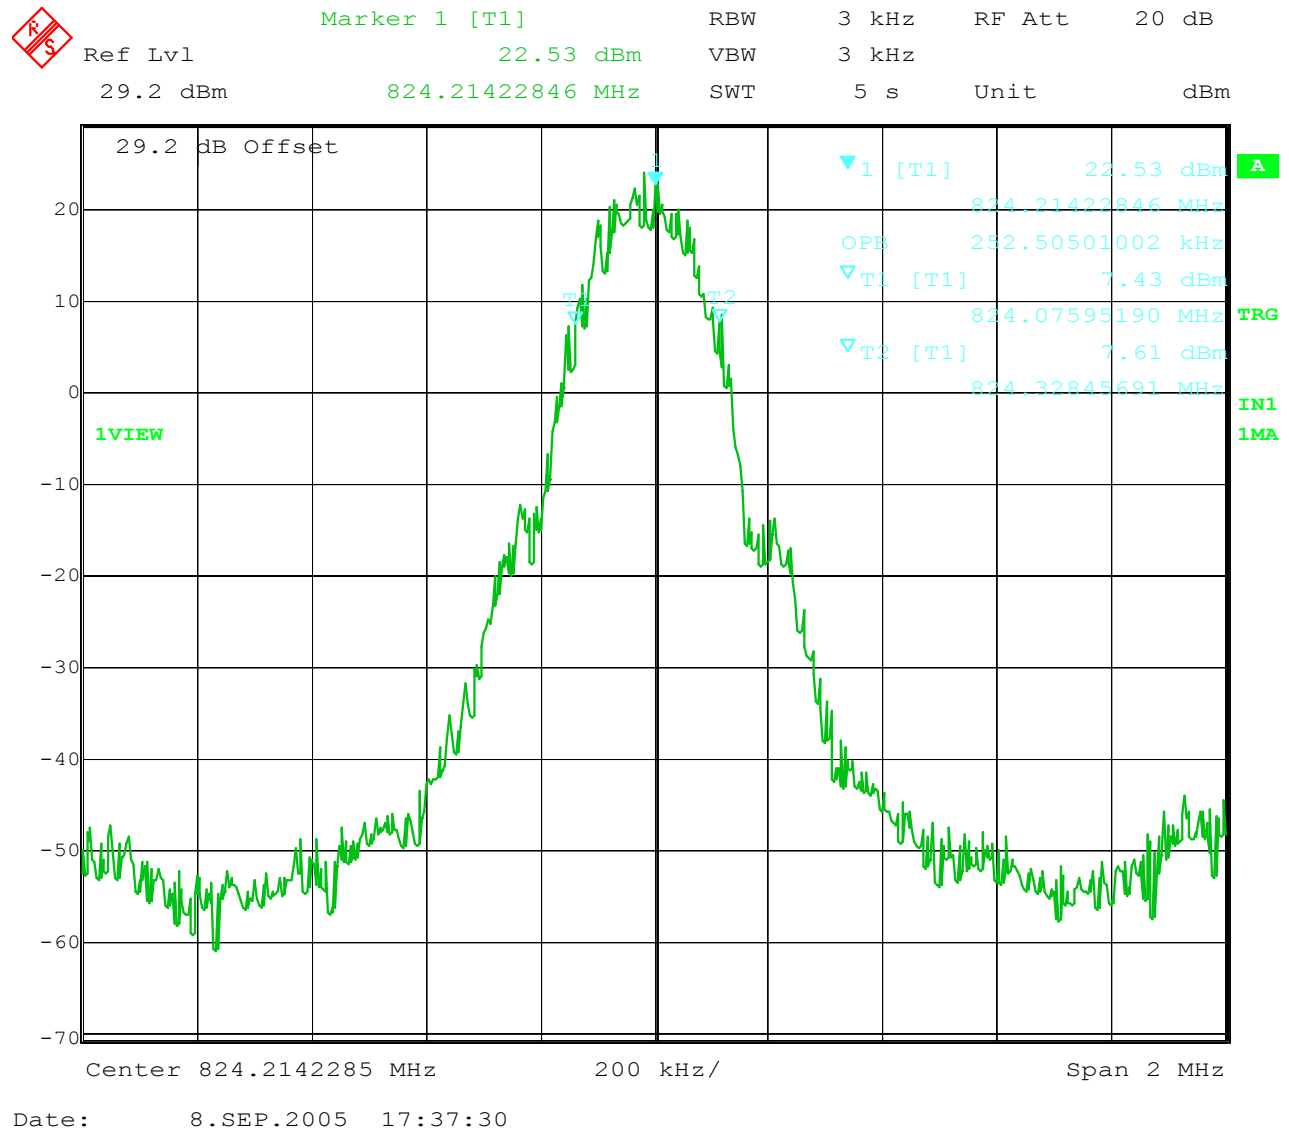


Figure 6-2: Occupied Bandwidth – GSM 190

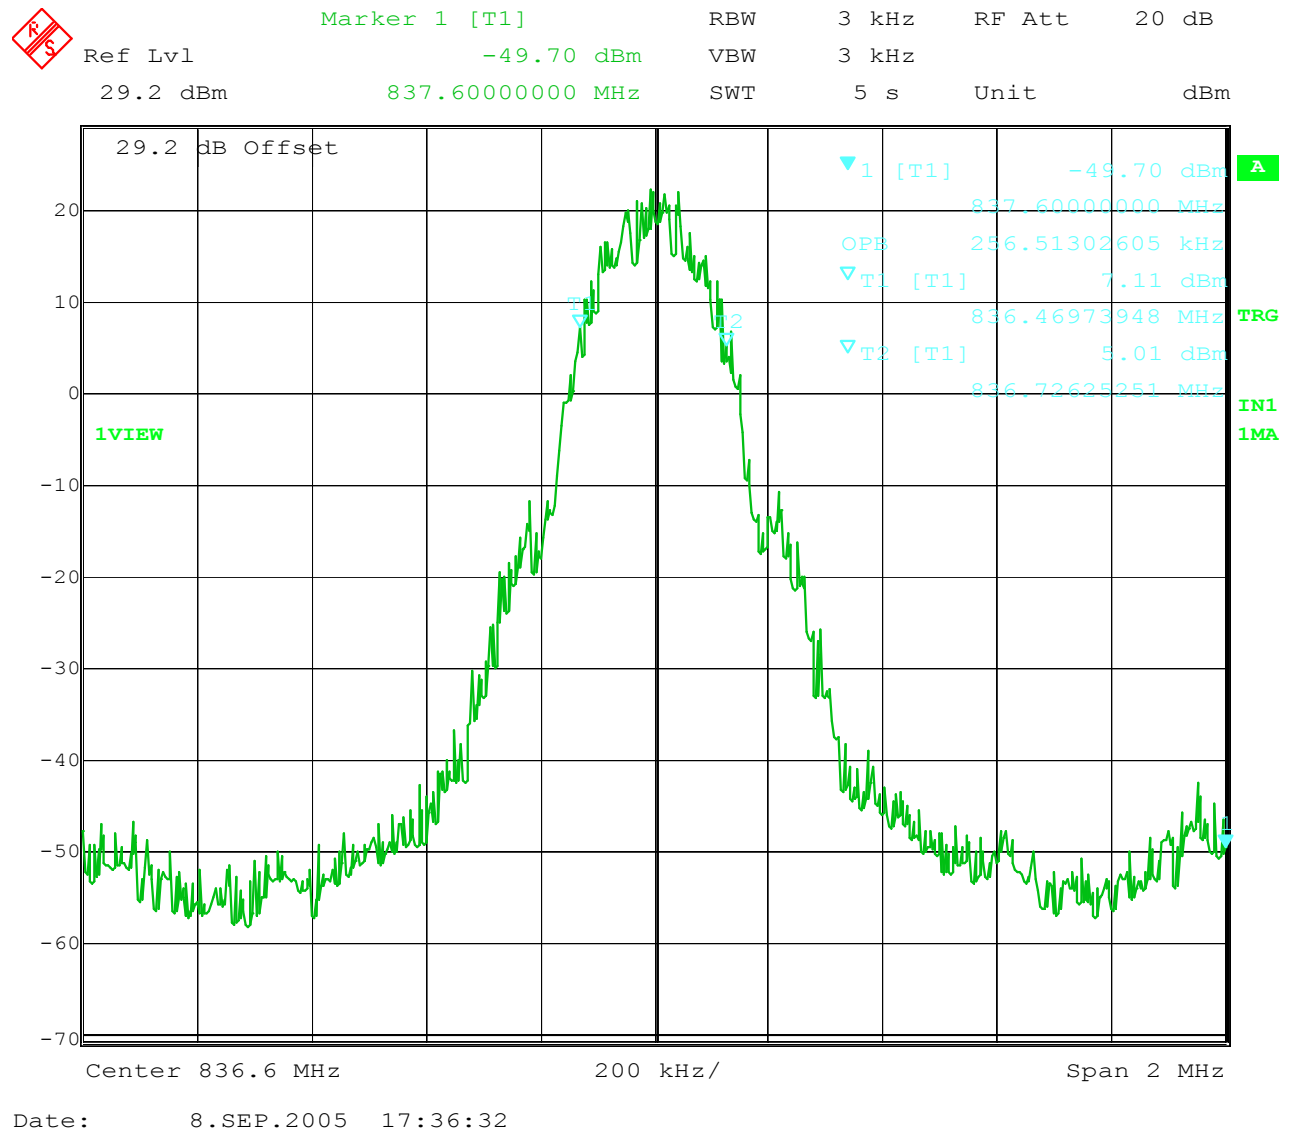


Figure 6-3: Occupied Bandwidth – GSM 251

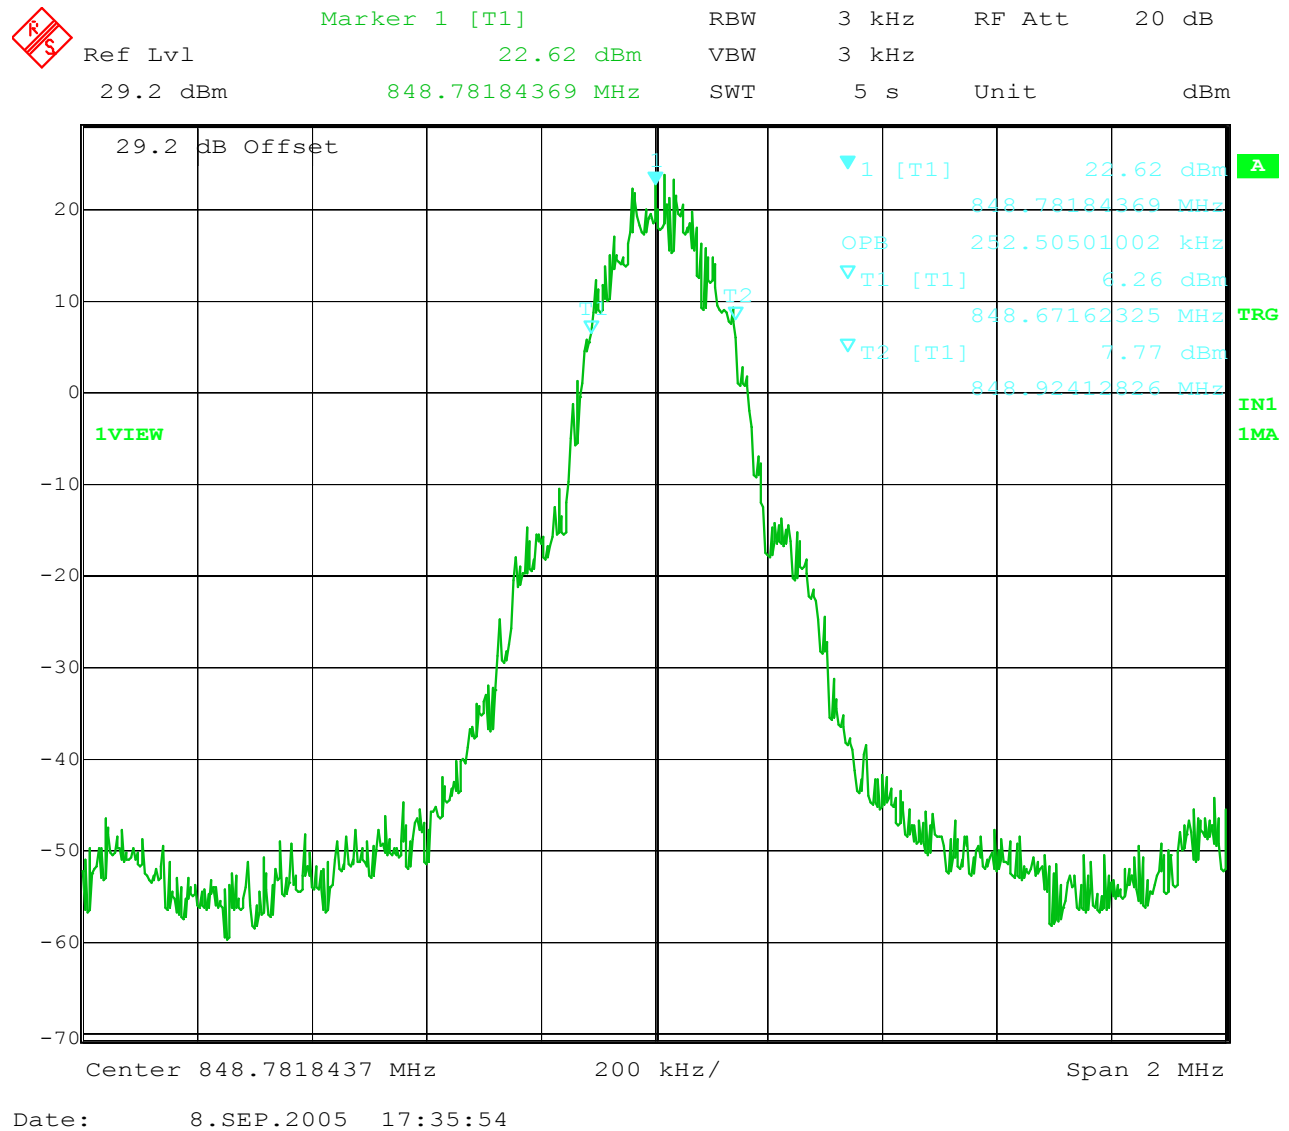


Figure 6-4: Occupied Bandwidth – GSM 512

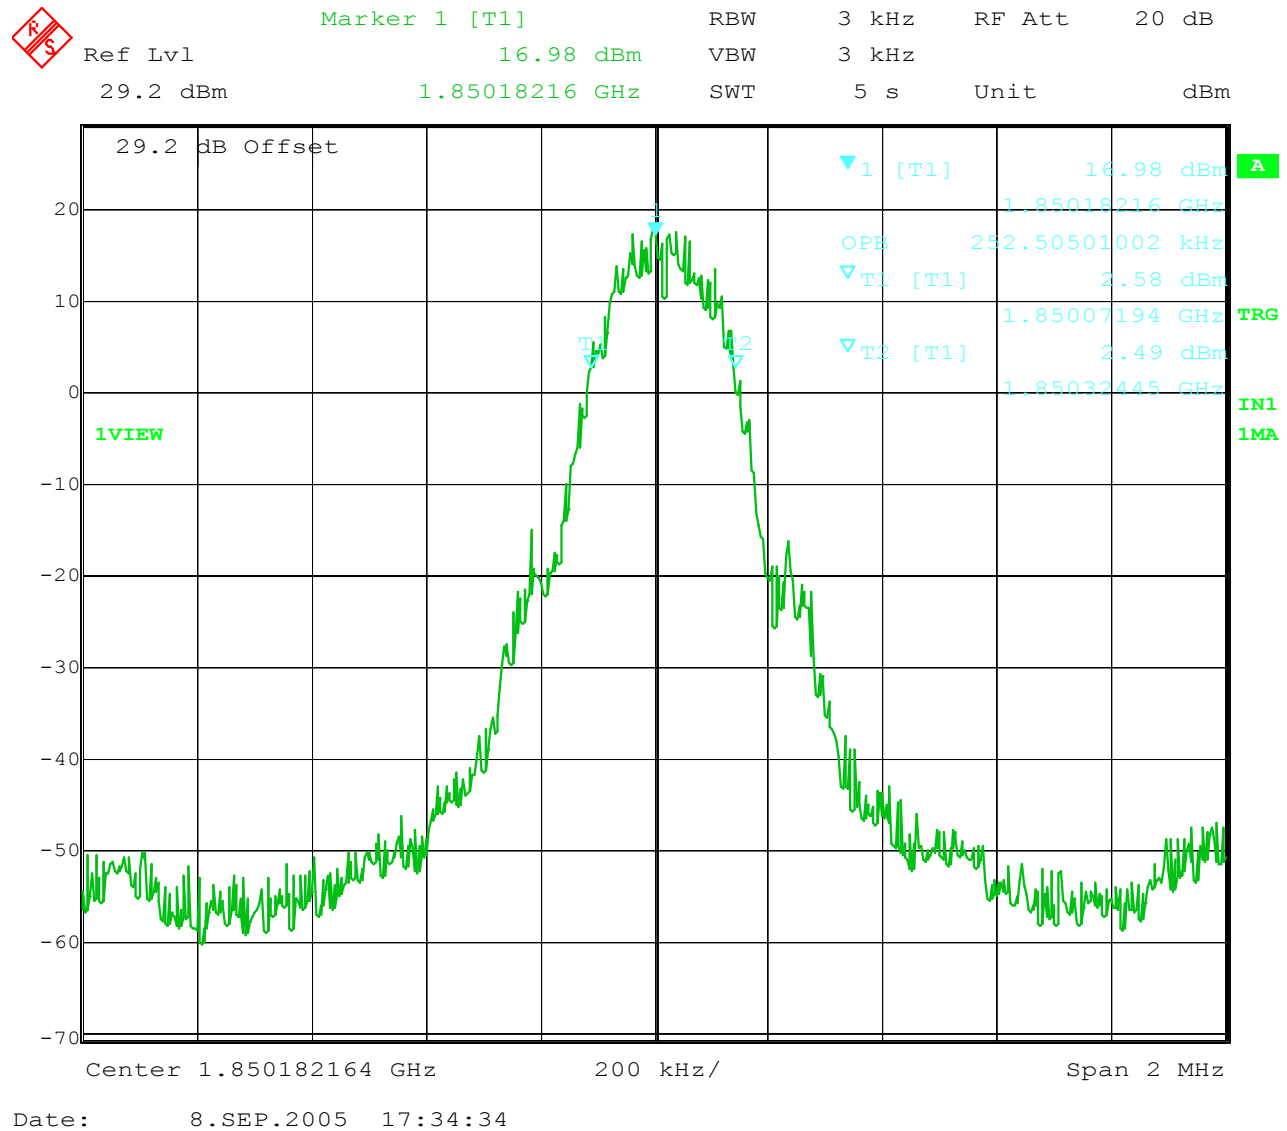


Figure 6-5: Occupied Bandwidth – GSM 662


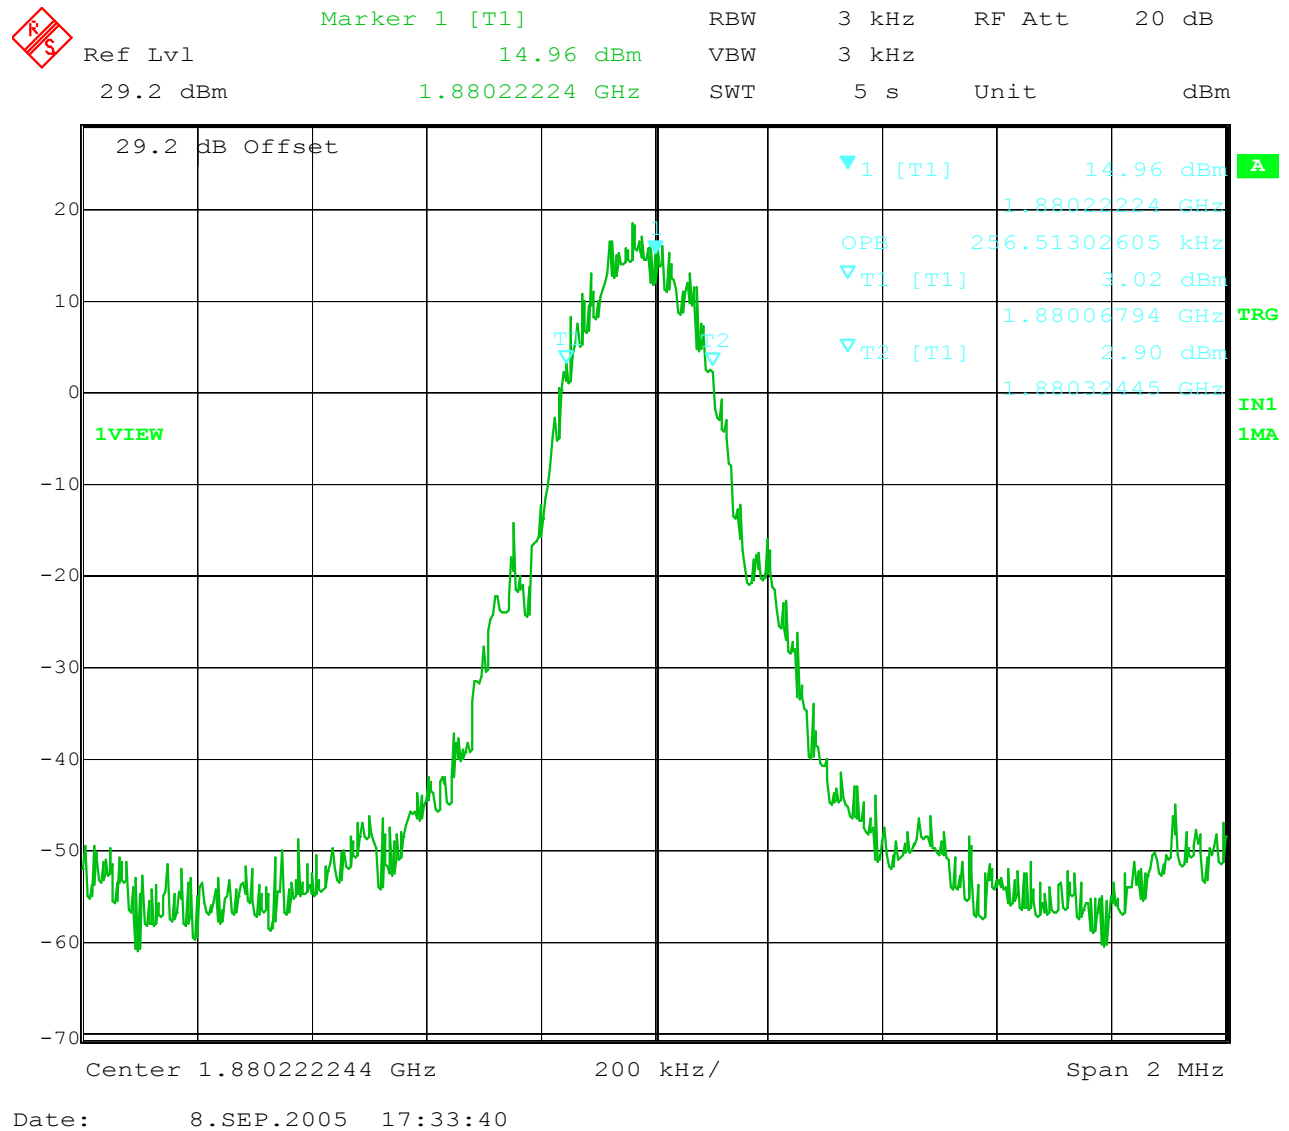


Figure 6-6: Occupied Bandwidth – GSM 810

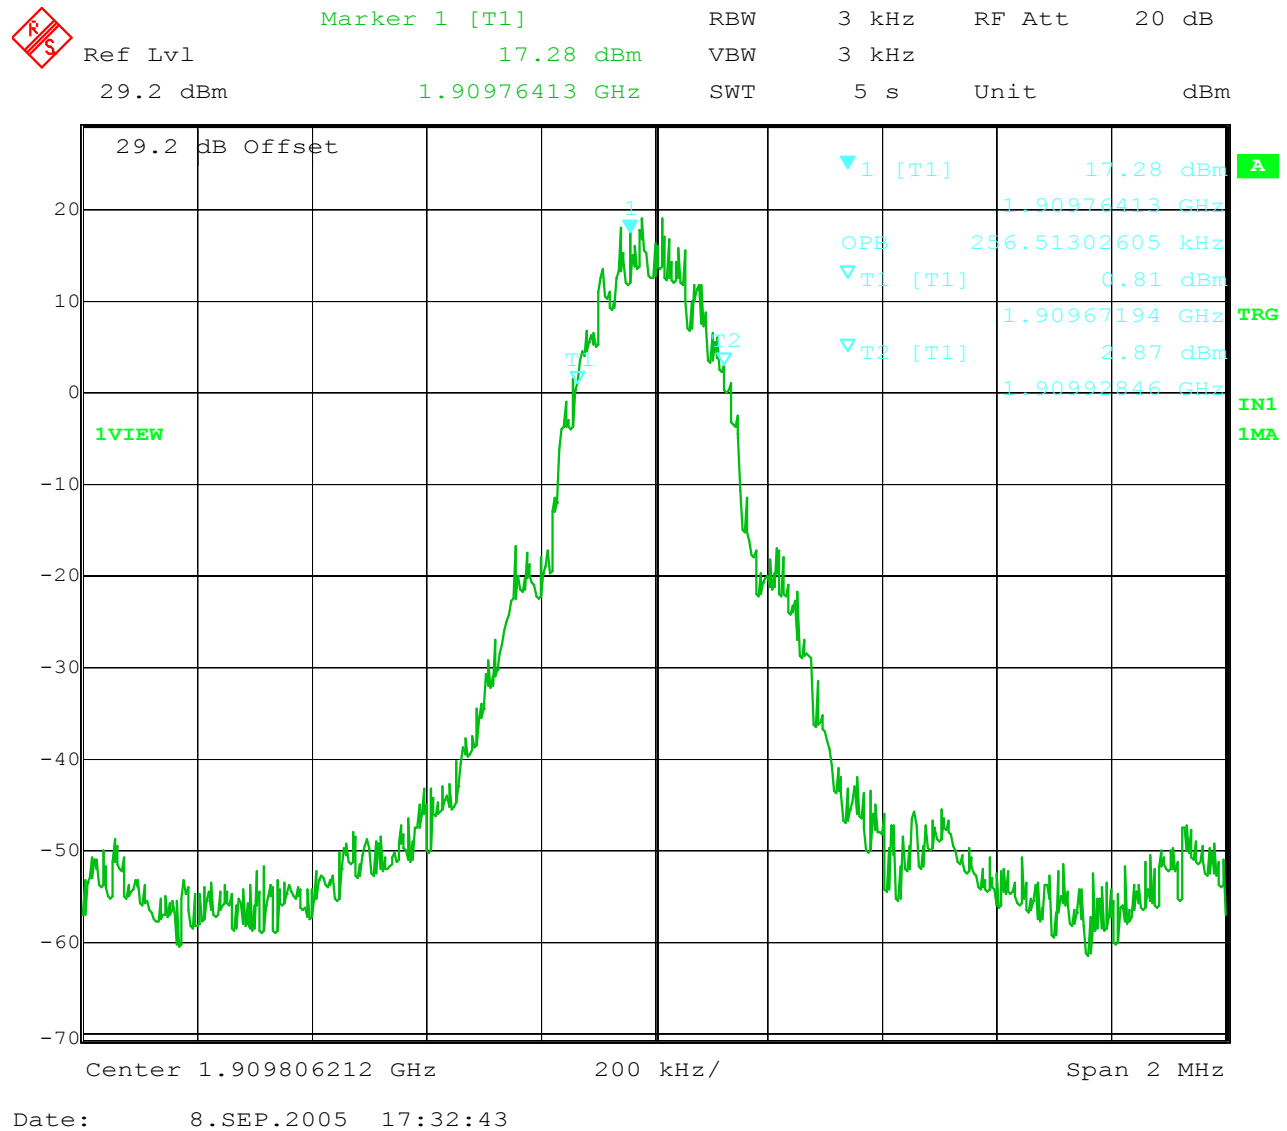

7 OUT OF BAND EMISSION AT ANTENNA TERMINALS

FCC §2.1049, FCC §2.1051, §22.917(a), FCC §24.238(a)

RSS-132 §6.5

RSS-133 §6.3

7.1 Test Limits

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. Therefore, the test limit is defined by the following formula:

$$\text{Test Limit (dBm)} = \text{Tx Power (dBm)} - (43 + 10 \log(\text{Tx Power (Watts)})) = -13\text{dBm}$$

7.2 Test Procedure

Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for the GSM band and 1 MHz or greater in the GSM band. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The EUT was set to force its maximum power setting. The resolution bandwidth of the spectrum analyzer was set at 1 MHz. Sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.

The transmission was exercised in burst mode to generate maximum power, the power was averaged shall be averaged over the burst duration, during which its power value is at its maximum. The power measurement was averaged only over the durations of actual transmission. Gated Average detector was used during transmitted and out of band power measurements.

7.3 Test Results

The MODEM met the out of band emission at antenna terminal requirements.


Table 7-1: Summary of test result locations

Location	Mode (Band)	Channel	Description
Figure 7-1	GSM 850	128, 190, 251	Conducted spurious emissions, 30MHz to 7 GHz
Figure 7-2	GSM 850	128, 190, 251	Zoom Graph of the Carrier Frequencies
Figure 7-3	GSM 1900	512, 662, 810	Conducted spurious emissions, 30MHz to 7 GHz
Figure 7-4	GSM 1900	512, 662, 810	Zoom Graph of the Carrier Frequencies
Figure 7-5	GSM 850	128	Emissions within 1 MHz of band edge
Figure 7-6	GSM 850	251	Emissions within 1 MHz of band edge
Figure 7-7	GSM 1900	512	Emissions within 1 MHz of band edge
Figure 7-8	GSM 1900	810	Emissions within 1 MHz of band edge

NOTE: Figures 8-1 and 8-2 contain plots that start at 30 MHz and stop at 7 GHz.

The harmonics are shown only up to 7 GHz. Harmonics above 7GHz were equal or less than the measuring receiver's noise floor.


Figure 7-1: Out of band emissions at antenna terminals – GSM 850 Channels 128, 190, 251

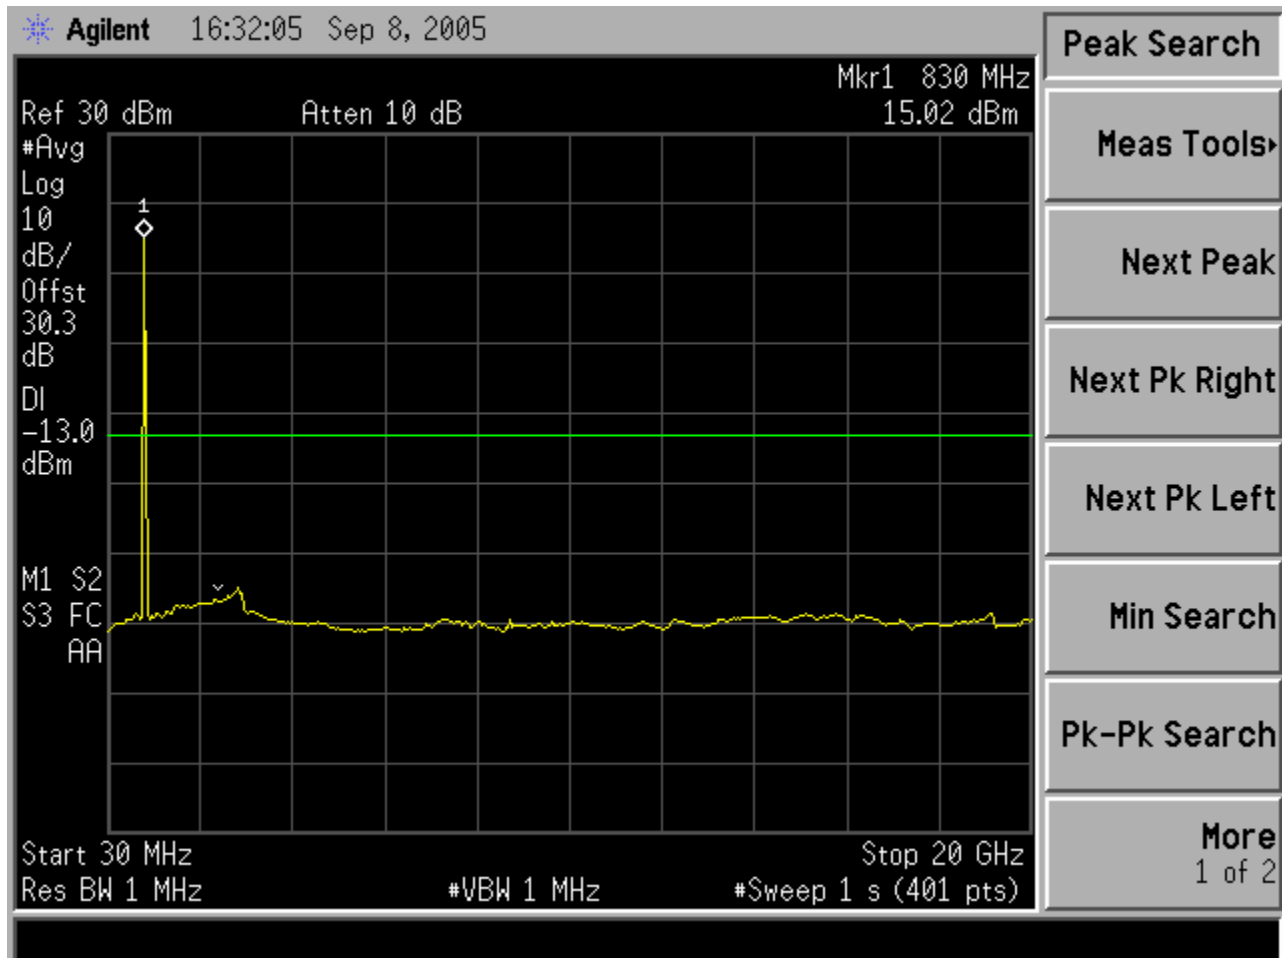

Evaluation For: Enfora
Model No: EDG0200

FCC ID: MIVEDG0200

Figure 7-2: Out of band emissions at antenna terminals – GSM 850 Channels 128, 190, 251
(Zoomed Around Carrier Frequencies)

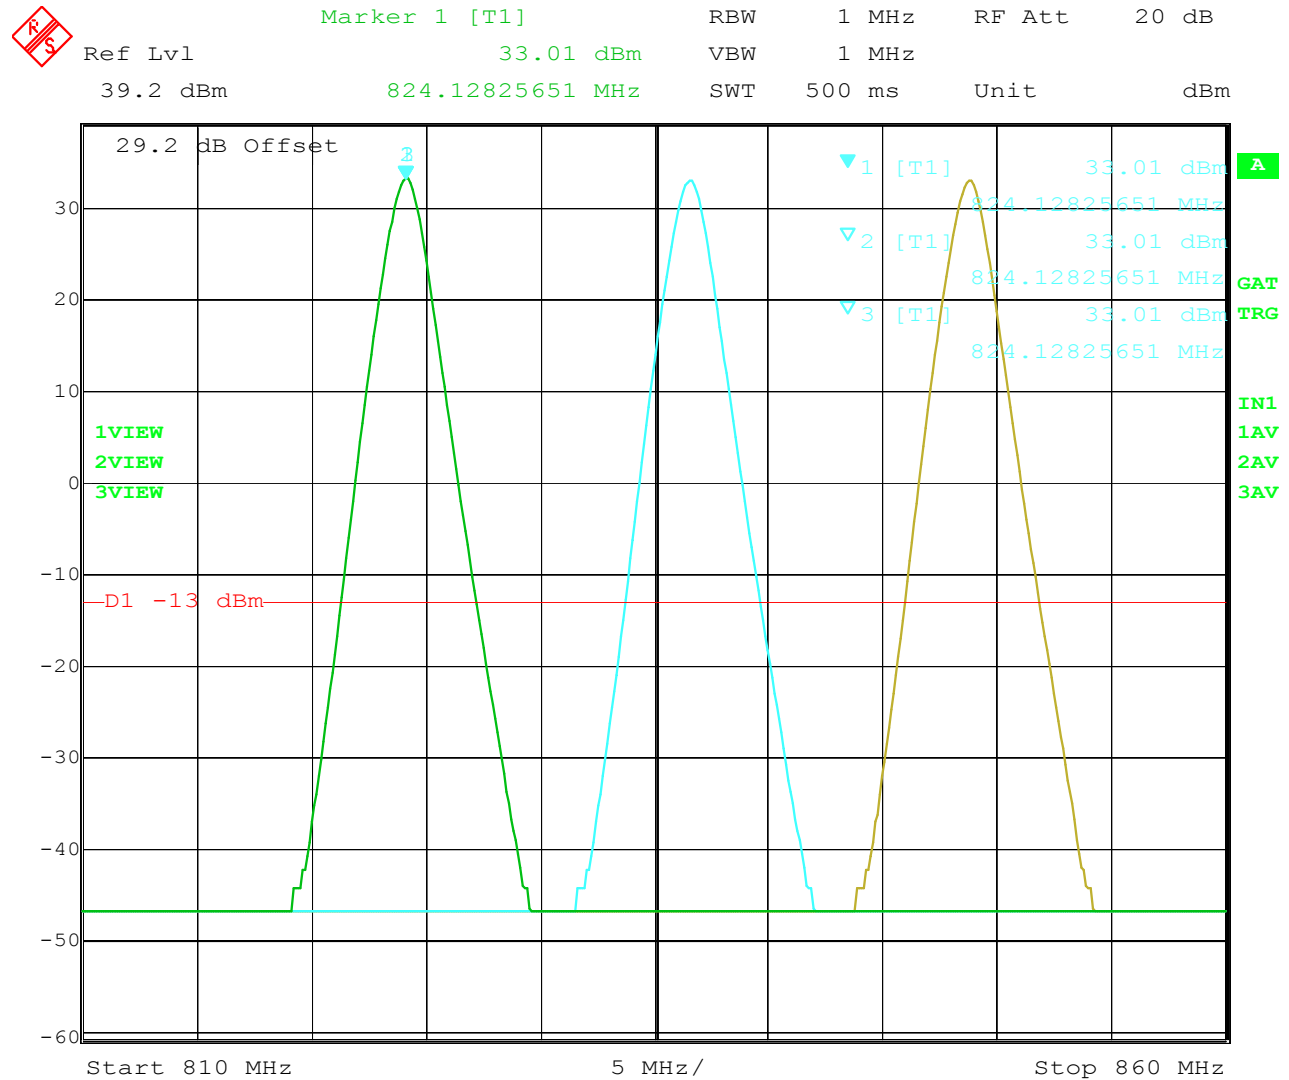

Date: 7.SEP.2005 17:13:37

Figure 7-3: Out of band emissions at antenna terminals – GSM 1900 Channels 512, 662, 810



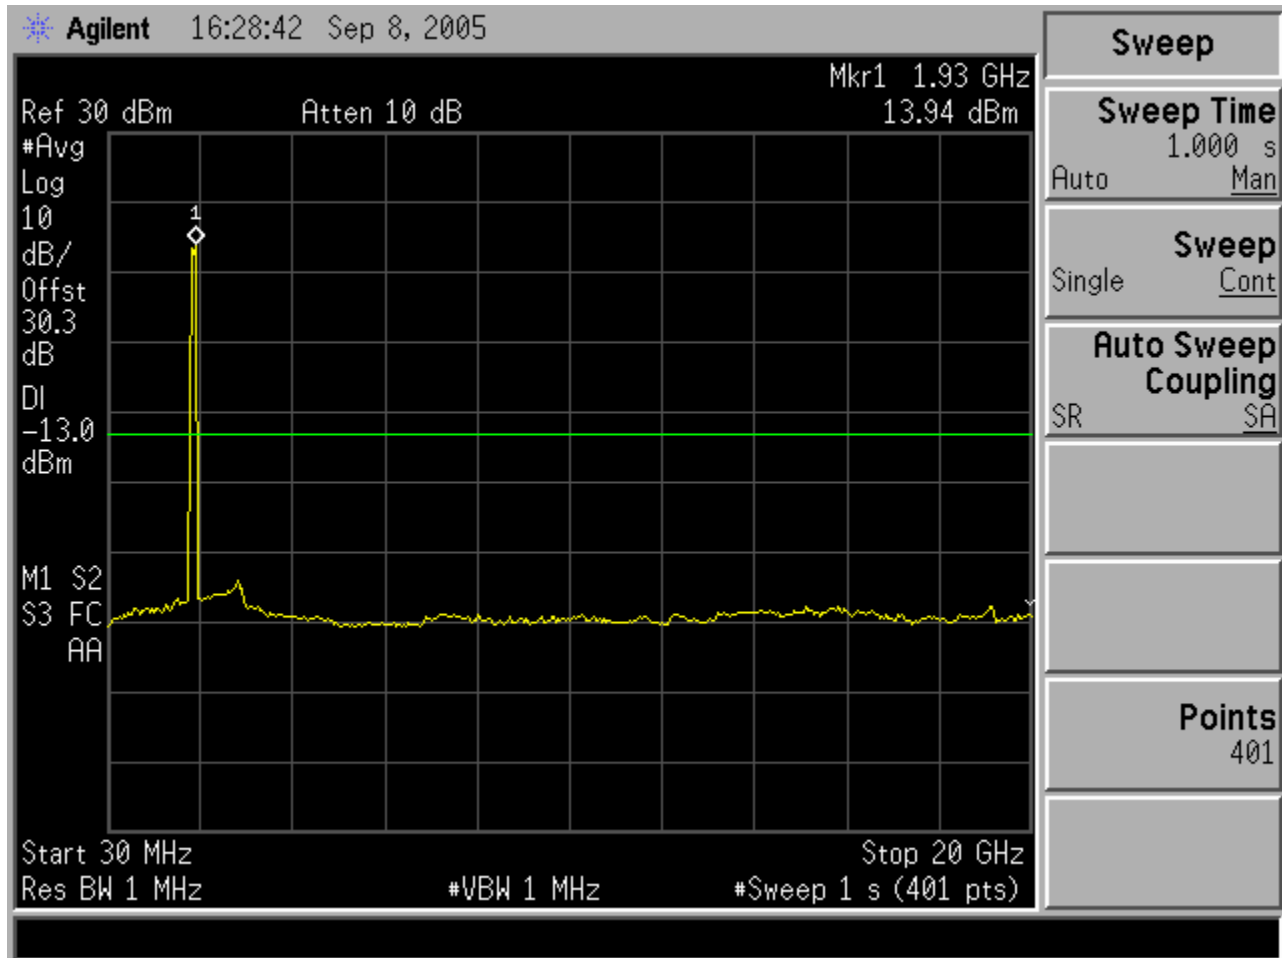


Figure 7-4: Out of band emissions at antenna terminals – GSM 1900 Channels 512, 662, 810 (Zoomed In on Carrier Frequencies)

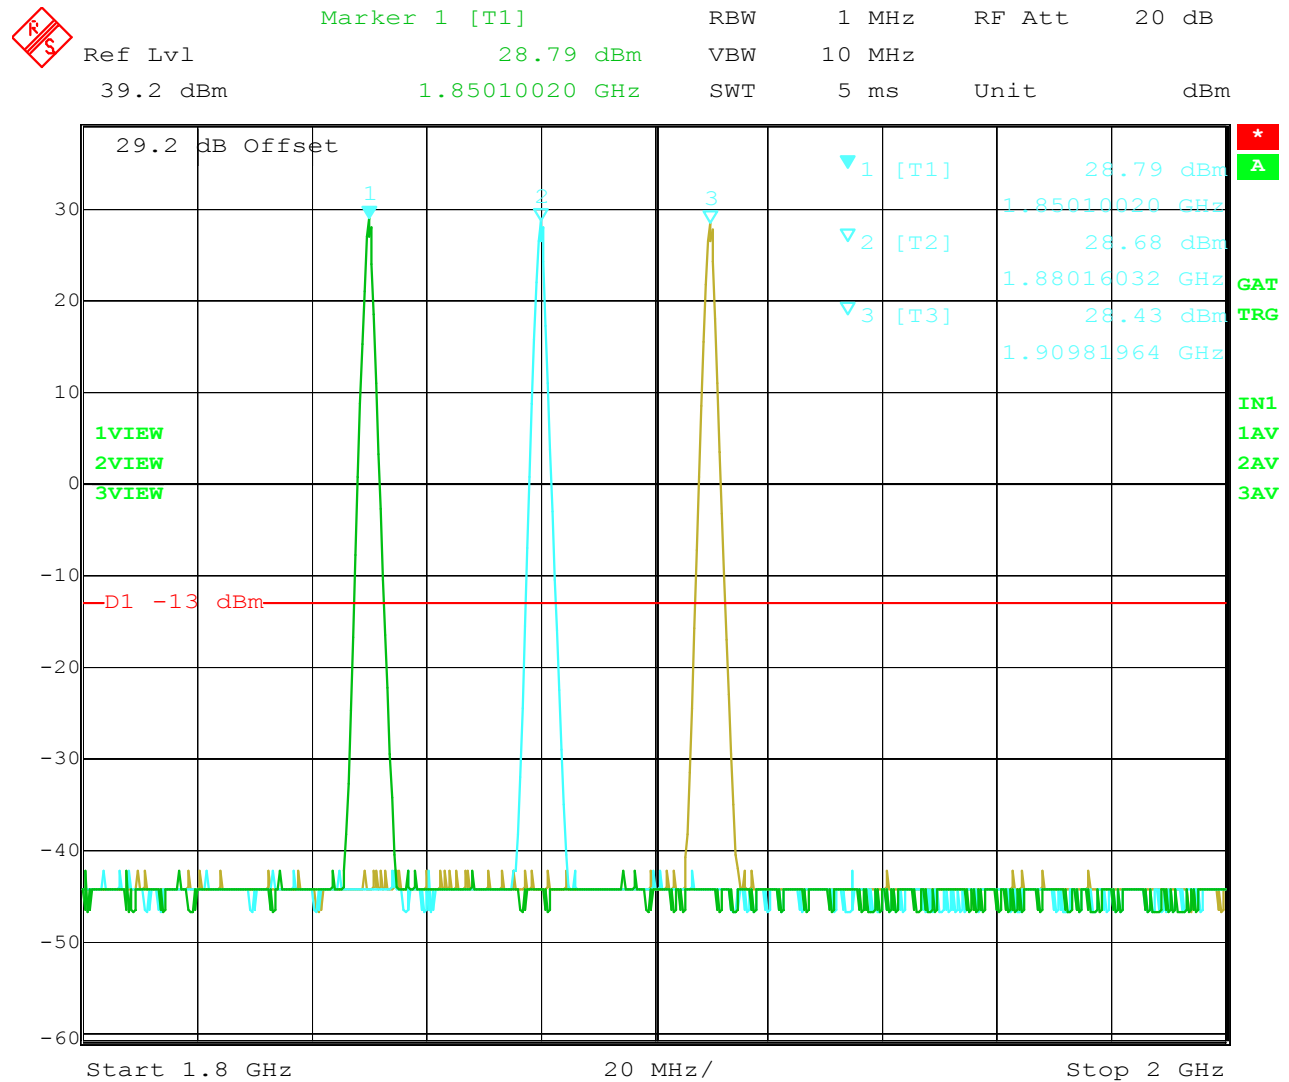


Date: 7.SEP.2005 17:33:16

Figure 7-5: Emissions within 1 MHz of band edge, GSM 850 Lower Band Edge

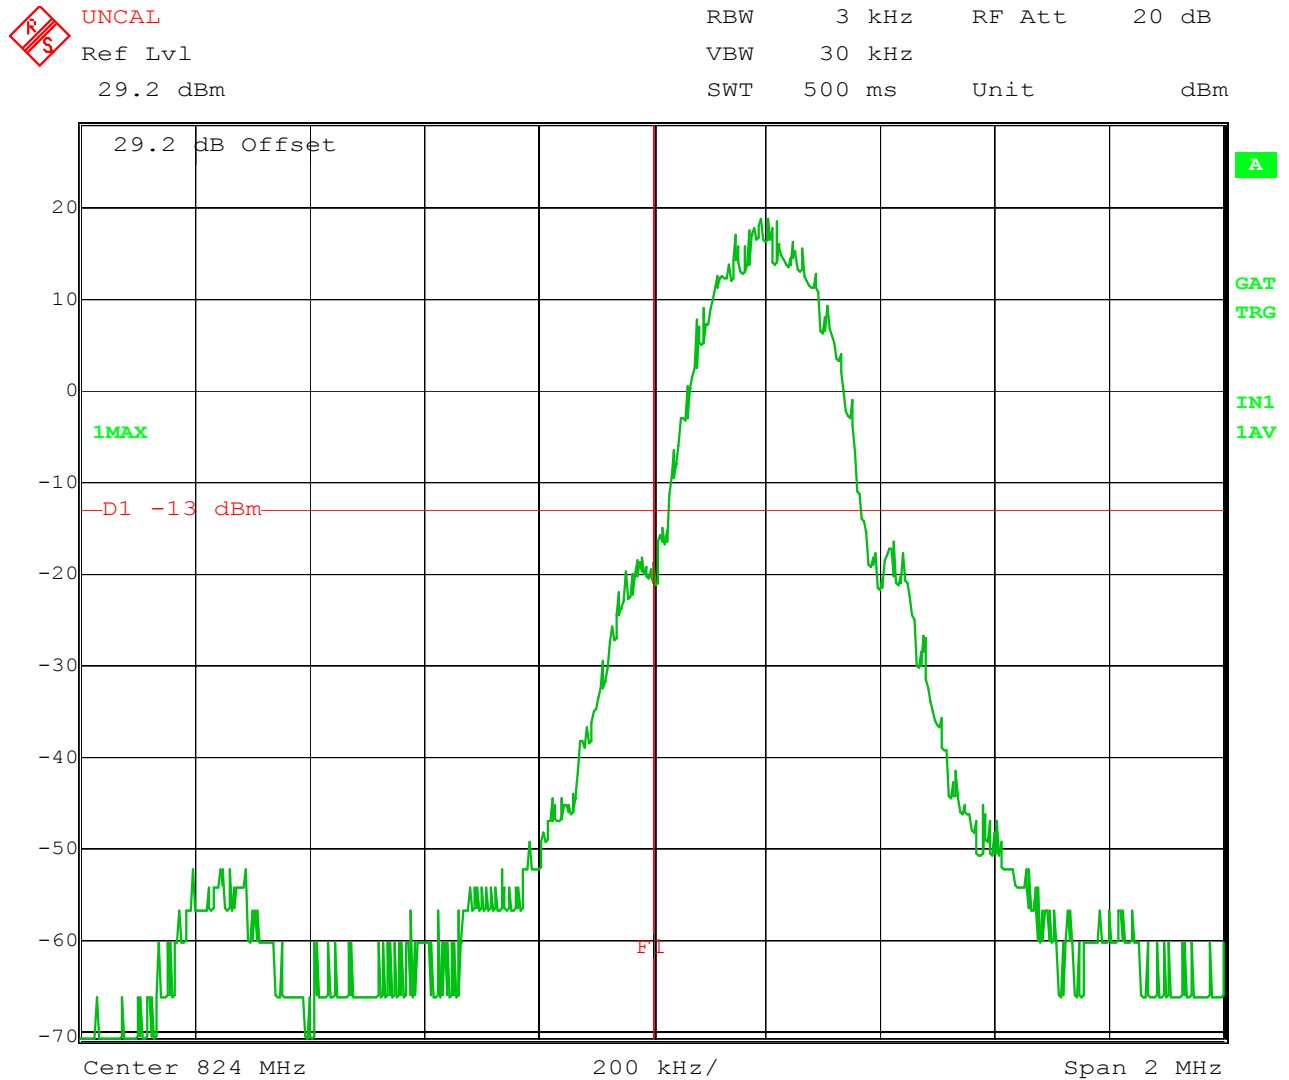

Date: 7.SEP.2005 17:10:13

Figure 7-6: Emissions within 1 MHz of band edge, GSM 850 Upper Band Edge¹

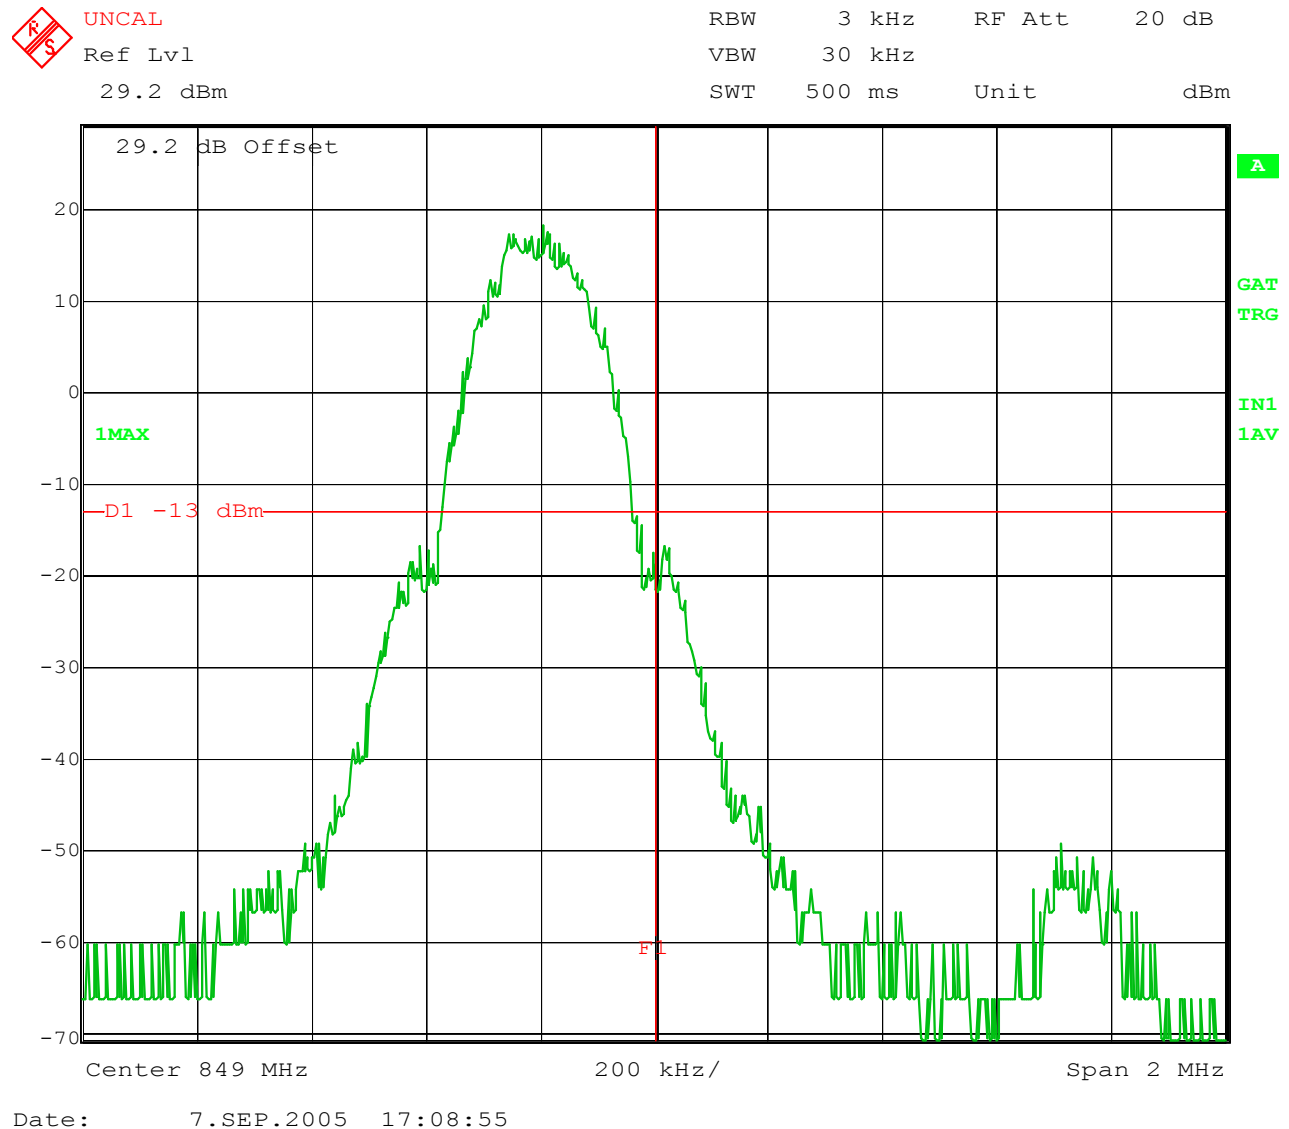

¹ To show compliance with the upper band edge requirement, a 3 kHz RBW was used.

Figure 7-7: Emissions within 1 MHz of band edge, GSM 1900 Lower Band Edge


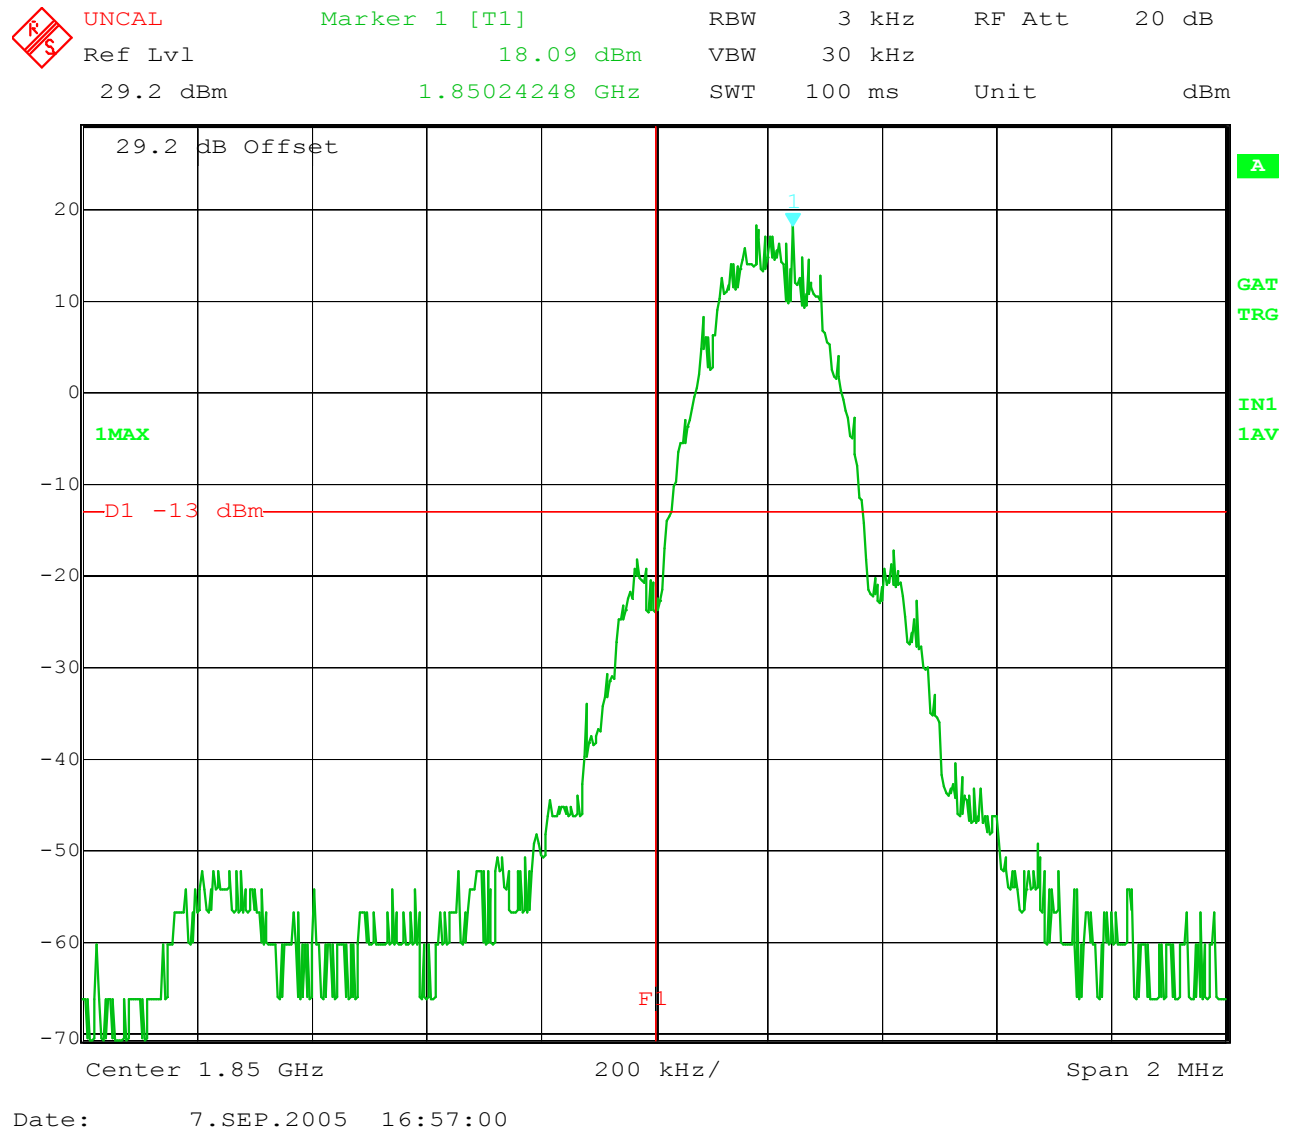


Figure 7-8: Emissions within 1 MHz of band edge, GSM 1900 Upper Band Edge

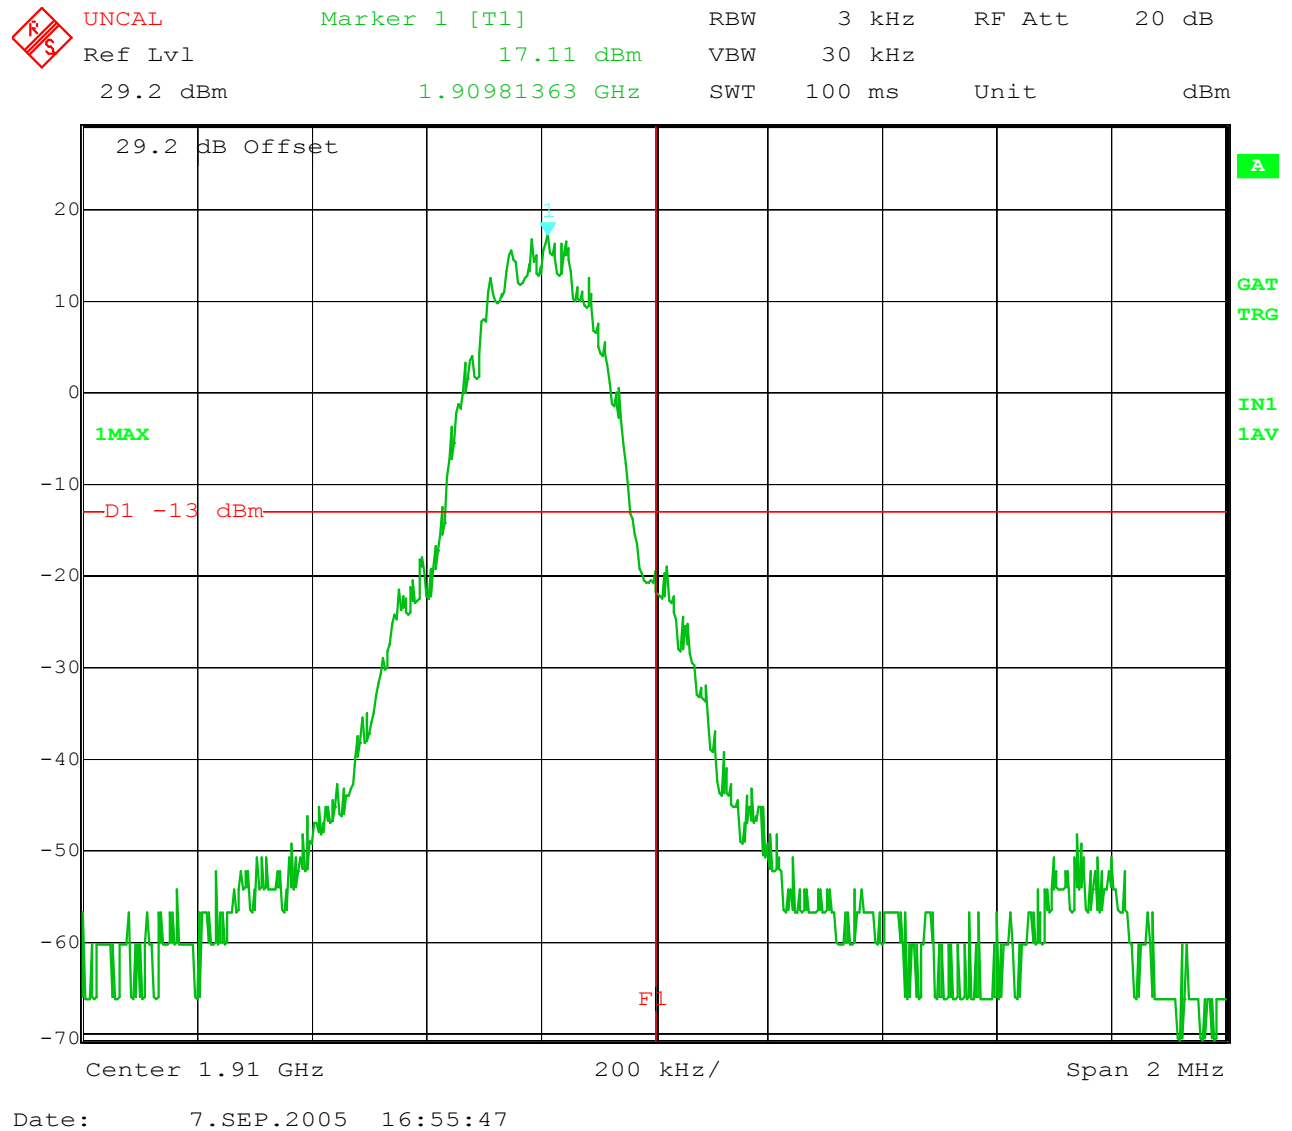

8 FIELD STRENGTH OF SPURIOUS RADIATION

FCC §2.1053; FCC §22.917; FCC §24.238

RSS-132 §6.6

8.1 Test Limits

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. Therefore, the test limit is defined by the following formula:

$$\text{Test Limit (dBm)} = \text{Tx Power (dBm)} - (43 + 10 \log (\text{Tx Power (Watts)})) = -13\text{dBm}$$

8.2 Test Procedure

The EUT was placed on a non-conductive turntable. The measurement antenna was placed at a distance of 3 meters from the EUT. The EUT was set to force its maximum power setting. During the tests, the antenna height and EUT azimuth were varied in order to identify the maximum level of emissions from the EUT.

The frequency range up to tenth harmonic was investigated for each of three fundamental frequencies (low, middle, and high channels) in each operating band. Once spurious emissions were identified, the power of the emission was determined using the substitution method described in TIA-603-B section 2.2.12 (Radiated Spurious Emissions).

The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and at the spurious emissions frequency.

8.3 Test Results

The EUT met the field strength of spurious radiation requirements of FCC §2.1053, FCC §22.917, and FCC §24.238. See Table 8-1 for measured radiated spurious emission power for emissions within 20 dB of the limit. All other emissions not reported are at least 20dB below the limit.

Table 8-1: Field Strength of Spurious Radiation Substitution Measurements

EUT Mode	Channel	Polarity	Frequency (MHz)	Device Reading (dBuV/m)	Sub Reading (dBuV/m)	Cable Loss (dB)	Tx Antenna Gain (dBi)	Signal Generator Output (dBm)	ERP (dBm)
GSM 850	128	H	1648.20	64.72	102.55	4.71	6.75	0.00	-37.93
		H	2472.41	74.62	100.99	5.82	7.86	0.00	-26.49
		H	3296.41	54.28	99.59	6.71	8.12	0.00	-46.05
		H	4120.80	52.08	99.83	7.51	8.09	0.00	-49.31
		H	4944.79	46.44	98.22	8.17	8.26	0.00	-53.85
		H	5769.61	49.25	98.00	8.78	8.66	0.00	-51.01
		H	1648.20	64.72	102.55	4.71	6.75	0.00	-37.93
		H	2472.41	74.62	100.99	5.82	7.86	0.00	-26.49
		H	3296.41	54.28	99.59	6.71	8.12	0.00	-46.05
	190	H	1673.03	66.75	101.97	4.75	6.77	0.00	-35.34
		H	2509.50	68.50	100.84	5.86	7.90	0.00	-32.45
		H	3346.58	53.89	100.47	6.76	8.14	0.00	-47.36
		H	4182.84	49.52	100.22	7.56	8.19	0.00	-52.22
		H	5019.55	47.86	97.81	8.23	8.21	0.00	-52.12
		H	5019.83	48.10	97.81	8.23	8.21	0.00	-51.87
	251	H	1697.38	61.87	100.54	4.78	6.80	0.00	-38.80
		H	1697.40	63.51	100.54	4.78	6.80	0.00	-37.17
		H	1697.48	65.69	100.54	4.78	6.80	0.00	-34.99
		H	2546.07	63.79	100.86	5.90	7.91	0.00	-37.22
		H	2546.10	65.49	100.86	5.90	7.91	0.00	-35.51
		H	3394.91	49.50	101.01	6.81	8.16	0.00	-52.31
		H	4243.74	46.08	99.79	7.61	8.29	0.00	-55.18
		H	4243.75	46.39	100.10	7.61	8.29	0.00	-55.18
		H	4244.06	46.15	99.88	7.61	8.29	0.00	-55.20
		H	5940.85	50.06	97.31	8.88	8.76	0.00	-49.52

EUT Mode	Channel	Polarity	Frequency (MHz)	Device Reading (dBuV/m)	Sub Reading (dBuV/m)	Cable Loss (dB)	Tx Antenna Gain (dBi)	Signal Generator Output (dBm)	EIRP (dBm)
GSM 1900	512	H	3699.95	52.36	100.35	7.12	8.08	0.00	-47.03
		H	5551.42	58.45	97.22	8.60	8.53	0.00	-38.84
	662	H	3760.37	62.74	99.44	7.18	8.04	0.00	-35.82
		H	5640.07	68.37	97.37	8.67	8.58	0.00	-29.08
	810	H	3819.46	62.74	99.53	7.23	8.01	0.00	-36.01

Evaluation For: Enfora
Model No: EDG0200

FCC ID: MIVEDG0200

Contd...

EUT Mode	Channel	Polarity	Frequency (MHz)	Device Reading (dBuV/m)	Sub Reading (dBuV/m)	Cable Loss (dB)	Tx Antenna Gain (dBi)	Signal Generator Output (dBm)	ERP (dBm)
GSM 850	128	V	1648.25	53.68	101.74	4.71	6.75	0.00	-48.17
		V	2472.26	49.80	99.15	5.82	7.86	0.00	-49.46
		V	4119.86	42.35	99.28	7.50	8.09	0.00	-58.49
		V	4946.21	46.32	99.01	8.17	8.25	0.00	-54.75
		V	5769.99	48.64	97.60	8.78	8.66	0.00	-51.23
		V	6593.68	53.31	96.54	9.31	9.34	0.00	-45.34
	190	V	1673.11	55.45	102.23	4.75	6.77	0.00	-46.91
		V	2509.61	54.23	99.39	5.86	7.90	0.00	-45.27
		V	3346.27	39.72	97.42	6.77	8.14	0.00	-58.48
		V	4182.10	42.66	98.21	7.56	8.19	0.00	-57.07
		V	5019.92	47.37	99.12	8.23	8.21	0.00	-53.91
		V	5855.56	49.34	97.38	8.83	8.71	0.00	-50.31
		V	6692.45	53.13	96.78	9.38	9.28	0.00	-45.89
	251	V	1697.39	52.10	102.14	4.78	6.80	0.00	-50.17
		V	2546.15	50.73	99.21	5.90	7.91	0.00	-48.62
		V	2546.37	50.77	99.21	5.90	7.91	0.00	-48.58
		V	3394.51	39.97	99.40	6.81	8.16	0.00	-60.23
		V	3395.34	39.98	99.30	6.82	8.16	0.00	-60.13
		V	4243.95	42.59	99.94	7.61	8.29	0.00	-58.83
		V	4243.99	42.56	99.94	7.61	8.29	0.00	-58.85
		V	5093.47	46.70	98.19	8.29	8.26	0.00	-53.68
		V	5940.74	49.82	96.97	8.88	8.76	0.00	-49.42
		V	6789.22	53.78	97.55	9.43	9.23	0.00	-46.12

EUT Mode	Channel	Polarity	Frequency (MHz)	Device Reading (dBuV/m)	Sub Reading (dBuV/m)	Cable Loss (dB)	Tx Antenna Gain (dBi)	Signal Generator Output (dBm)	EIRP (dBm)
GSM 1900	512	V	3700.42	61.83	99.49	7.12	8.08	0.00	-36.69
		V	5550.97	68.12	97.35	8.60	8.53	0.00	-29.31
	662	V	3760.30	62.08	98.49	7.18	8.04	0.00	-35.54
		V	5640.38	68.00	97.55	8.67	8.58	0.00	-29.63
	810	V	3818.93	62.17	97.60	7.23	8.01	0.00	-34.65

9 POWER LINE CONDUCTED EMISSIONS

FCC §15.107, FCC §15.207

IC ES-003

9.1 Test Limits

Table 9-1 lists the conducted emission limits for both class A and B devices.

Table 9-1 Conducted Emission Limit for FCC §15.207(a)

Frequency Range (MHz)	Class A Limits		Class B Limits	
	FCC Part 15.107(a) Quasi Peak Limit (dBuV)	FCC Part 15.107(a) Average Limit (dBuV)	FCC Part 15.107(a) Quasi Peak Limit (dBuV)	FCC Part 15.107(a) Average Limit (dBuV)
0.15 – 0.5	79	66	66 to 56	56 to 46
0.5 – 5.0	73	60	56	46
5.0 - 30	73	60	60	50

9.2 Test Procedure

Measurements are carried out using quasi-peak and average detector receivers in accordance with CISPR 16. An AMN is required to provide defined impedance at high frequencies across the power feed at the point of measurement of terminal voltage and also to provide isolation of the circuit under test from the ambient noise on the power lines. An AMN as defined in CISPR 16 shall be used.

The EUT is located so that the distance between the boundary of the EUT and the closest surface of the AMN is 0.8m.

Where a flexible mains cord is provided by the manufacturer, this shall be 1m long or if in excess of 1m, the excess cable is folded back and forth as far as possible so as to form a bundle not exceeding 0.4m in length.

The EUT is arranged and connected with cables terminated in accordance with the product specification.

Conducted disturbance is measured between the phase lead and the reference ground, and between the neutral lead and the reference ground. Both measured values are reported.

The EUT, where intended for tabletop use, is placed on a table whose top is 0.8m above the ground plane. A vertical, metal reference plane is placed 0.4m from the EUT. The vertical metal reference-plane is at least 2m by 2m. The EUT shall be kept at least 0.8m from any other metal surface or other ground plane not being part of the EUT. The table is constructed of non-conductive materials. Its dimensions are 1m by 1.5m, but may be extended for larger EUT.

Floor standing EUTs are placed on a horizontal metal ground plane and isolated from the ground plane by 3 to 12 mm of insulating material. The metal ground plane extends at least 0.5m beyond the boundaries of the EUT and has minimum dimensions of 2m by 2m.



Equipment setup for conducted disturbance tests followed the guidelines of ANSI C63.4: 1992.

9.3 Test Results

The EUT met the power line conducted emission requirements of FCC §15.107 and §15.207. The test results are located in Figure 9-1. The graphical data, measured with peak detection, was all below the class B quasi-peak and average limits.

The power line conducted emissions were measured using a ACER laptop with device installed in the LAPTOP at 120VAC.

Figure 9-1: FCC §15.107 and §15.207 power line conducted emissions (Lines 1 and 2)

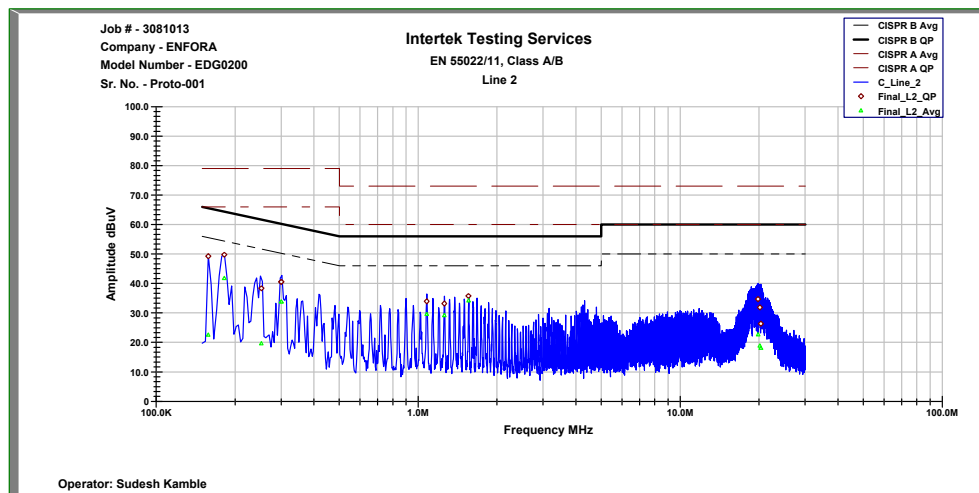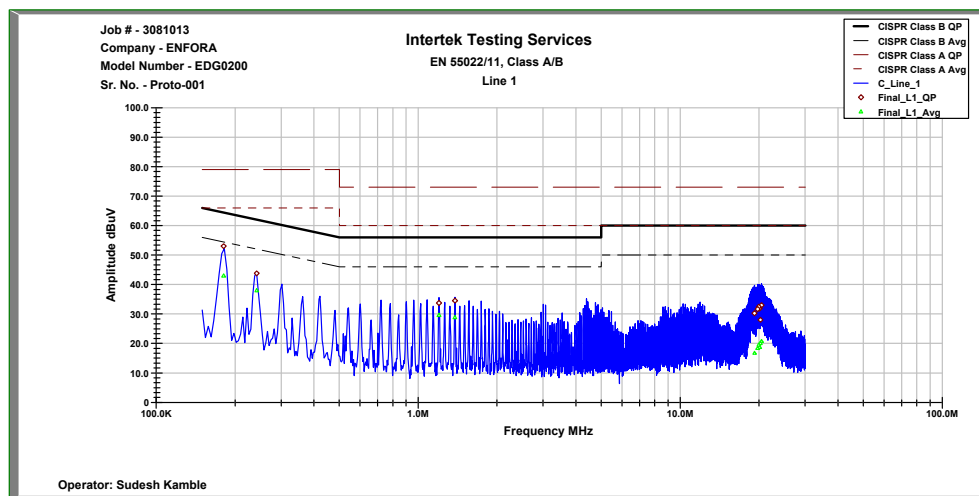

Evaluation For: Enfora
Model No: EDG0200

FCC ID: MIVEDG0200

Line 1

Frequency MHz	L1 QP dBμV	L1 Avg dBμV	QP Class B Limit dBμV	QP Margin dB	Avg. Class B Limit dBμV	Avg. Margin dB
0.181	52.985	42.976	65.114	-12.129	55.114	-12.138
0.242	43.758	37.934	63.371	-19.614	53.371	-15.437
1.201	33.722	29.598	56.000	-22.278	46.000	-16.402
1.381	34.488	28.832	56.000	-21.512	46.000	-17.168
19.217	30.213	16.736	60.000	-29.787	50.000	-33.264
19.751	31.649	18.359	60.000	-28.351	50.000	-31.641
19.935	32.415	19.499	60.000	-27.585	50.000	-30.501
20.116	31.852	18.760	60.000	-28.148	50.000	-31.240
20.232	27.994	20.035	60.000	-32.006	50.000	-29.965
20.42	32.952	20.738	60.000	-27.048	50.000	-29.262

Line 2

Frequency MHz	L2 QP dBμV	L2 Avg dBμV	QP Class B Limit dBμV	QP Margin dB	Avg. Class B Limit dBμV	Avg. Margin dB
0.158	49.228	22.527	65.771	-16.544	55.771	-33.244
0.182	49.719	41.752	65.086	-15.367	55.086	-13.333
0.252	38.333	19.610	63.086	-24.753	53.086	-33.476
0.300	40.507	33.790	61.714	-21.207	51.714	-17.924
1.078	33.946	29.548	56.000	-22.054	46.000	-16.452
1.258	33.136	29.196	56.000	-22.864	46.000	-16.804
1.556	35.742	34.159	56.000	-20.258	46.000	-11.841
19.828	34.701	22.660	60.000	-25.299	50.000	-27.340
20.132	31.825	18.881	60.000	-28.175	50.000	-31.119
20.316	26.304	18.043	60.000	-33.696	50.000	-31.957

10 RECEIVER SPURIOUS EMISSIONS

FCC §15.109

IC ES-003, RSS-132 §6.6, RSS-133 §9

10.1 Test Limits

Table 10-1 lists the Class A and B limits for spurious using quasi-peak detection below 1GHz and average detection above 1GHz.

Table 10-1 Radiated Emission Limit for FCC §15.109

Frequency (MHz)	3 Meter Limits		10 Meter Limits	
	Class A	Class B	Class A	Class B
	Quasi-Peak limits dB(μV/m)	Quasi-Peak limits, dB(μV/m)	Quasi-Peak limits dB(μV/m)	Quasi-Peak limits, dB(μV/m)
30 to 88	49.6	40	39.1	29.5
88 to 216	54.0	43.5	43.5	33.1
216 to 960	56.9	46.0	46.4	35.6
960 and up	60.0	54.0	49.5	43.5

10.2 Test Procedure

Measurements are made over the frequency range of 30 MHz to five times the highest frequency operating within the device. The measuring receiver meets the requirements of Section One of CISPR 16 and the measuring antenna correlates to a balanced dipole. From 30 to 1000 MHz, a quasi-peak detector was used for measurement. Above 1000 MHz, average measurements were performed.

Measurements of the radiated field are made with the antenna located at a distance of 3 meters from the EUT. If the field-strength measurements at 3m cannot be made because of high ambient noise level or for other reasons, measurements may be made at a closer distance, for example 1m. An inverse proportionality factor of 20 dB per decade should be used to normalize the measured data to the specified distance for determining compliance.

The antenna is adjusted between 1m and 4m in height above the ground plane for maximum meter reading at each test frequency.

The antenna-to-EUT azimuth is varied during the measurement to find the maximum field-strength readings.

The antenna-to-EUT polarization (horizontal and vertical) is varied during the measurements to find the maximum field-strength readings.

The EUT, where intended for tabletop use, is placed on a table whose top is 0.8m above the ground plane. The table is constructed of non-conductive materials. Its dimensions are 1m by 1.5m, but may be extended for larger EUT.

Equipment setup for radiated disturbance tests followed the guidelines of ANSI C63.4: 1992.

The transmitter was turned off during the test by accessing the EUT's internal test mode by an external PC.

10.3 Test Results

The EUT was **compliant** with the radiated disturbance requirements of FCC §15.109 for a **class B** device. The maximized quasi peak and average data can be found in Figure 10-1. The test Distance used was 3m.

Figure 10-1 FCC §15.109 Maximized Quasi Peak and Average Emissions (Max Emissions sorted by Margin)

Polarity	Frequency MHz	Ant Height cm	Azimuth deg.	QP dBμV /m	Limit dBμV /m	Margin dB
H	30.01	377.00	259.00	25.95	40.00	-14.51
H	30.34	376.00	280.00	25.83	40.00	-14.63
H	30.46	164.00	236.00	25.68	40.00	-14.78
H	30.64	185.00	292.00	25.50	40.00	-14.96
H	30.67	381.00	154.00	25.64	40.00	-14.82
H	30.84	364.00	114.00	25.69	40.00	-14.77
H	30.89	131.00	343.00	25.43	40.00	-15.03
H	31.62	365.00	343.00	25.75	40.00	-14.71
H	946.24	298.00	27.00	32.29	46.00	-15.17
H	950.03	319.00	310.00	32.34	46.00	-15.12
V	33.12	342.00	327.00	24.96	40.00	-15.50
V	103.66	131.00	88.00	27.57	43.50	-12.89
V	116.83	130.00	186.00	23.91	43.50	-16.55
V	162.37	123.00	249.00	23.43	43.50	-17.03
V	212.83	356.00	257.00	18.25	43.50	-22.21
V	572.45	272.00	314.00	29.18	46.00	-18.28
H	30.05	298.00	10.00	25.85	40.00	-14.61
H	30.25	339.00	81.00	25.73	40.00	-14.73
H	31.52	364.00	260.00	25.88	40.00	-14.58
H	32.34	364.00	289.00	25.48	40.00	-14.98
H	32.82	364.00	119.00	24.46	40.00	-16.00
H	33.00	364.00	329.00	24.87	40.00	-15.59
H	129.07	230.00	280.00	21.20	43.50	-19.26
H	162.38	212.00	298.00	29.45	43.50	-11.01
H	914.14	357.00	100.00	31.85	46.00	-15.61
H	974.97	144.00	351.00	32.41	54.00	-15.05
V	33.15	303.00	117.00	25.13	40.00	-15.33
V	103.73	117.00	84.00	29.23	43.50	-11.23
V	116.85	127.00	163.00	21.59	43.50	-18.88
V	162.42	117.00	339.00	27.96	43.50	-12.50
V	181.27	117.00	125.00	25.52	43.50	-14.94
V	228.2	201.00	231.00	18.95	46.00	-21.51
V	554.02	123.00	348.00	29.68	46.00	-17.78
V	762.32	281.00	63.00	30.80	46.00	-16.66
V	929.38	233.00	200.00	33.10	46.00	-14.36

11 FREQUENCY STABILITY VS TEMPERATURE

FCC §2.1055, FCC §22.355, FCC §24.235

RSS-132 §6.3 and RSS-133 §7

11.1 Test Limits

The frequency tolerance shall be maintained within: $\pm 2.5\text{ppm}$ (or 0.000025MHz)

11.2 Test Procedure

The transmitter output was connected to a calibrated coaxial cable. The EUT was set to its maximum power setting. The EUT was placed into a call and the transmitter output was read off the frequency counter. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss.

The equipment under test was powered and the RF output was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The EUT was placed inside the temperature chamber. The RF output cable exited the chamber through an opening made for that purpose. After the temperature stabilized for approximately 30 minutes, the frequency error was read from the Base Station Simulator.

11.3 Test Results

The EUT met the frequency stability requirements of FCC §2.1055, FCC §22.355 and FCC §24.235. The test results are located in Table 11-1.

Table 11-1: Frequency stability vs. Temperature

Frequency Stability** Vs. Temperature (Hz)						
Temp. (Celcius)	GSM 850 Channel #			GSM 1900 Channel #		
	128	190	251	512	662	810
60	-37	-32	-21	-45	-60	-56
50	-28	-28	-25	-36	-45	-49
40	25	23	22	-38	-38	-40
30	24	26	23	-44	32	-45
20	26	25	23	-27	30	-23
10	21	26	21	-23	24	-23
0	19	20	23	23	23	-24
-10	20	15	20	-25	22	-30
-20	17	14	15	-27	25	-24
-30	16	18	17	-26	-20	-30

** Noted as deviation from the reference frequency (absolute).

12 FREQUENCY STABILITY VS VOLTAGE

FCC §2.1055, FCC §22.355, FCC §24.235

12.1 Test Limits

The frequency tolerance shall be maintained within: $\pm 2.5\text{ppm}$ (or 0.000025MHz)

12.2 Test Procedure

The AC supply of the test Jig was replaced with a variable output AC using Power supply adapter supplying power to the test jig. The EUT was set to force the EUT to its maximum power setting. The voltage was set to 115% of the nominal value and was then decreased to 85% of the nominal value. The output frequency was recorded for each input voltage.

For DC supply voltage measurement, The DC supply to the EUT was connected to a variable output DC power supply. The Base Station Simulator was set to force the EUT to its maximum power setting. The voltage was set to 115% of the nominal value and was then decreased to 85% of the nominal value. The output frequency was recorded for each input voltage.

12.3 Test Results

The EUT met the frequency stability requirements of FCC §2.1055, FCC §22.355, and §24.235. The test results are located in Table 12-1.

Table 12-1: Frequency stability vs. input voltage

Frequency Stability Vs. Voltage						
Voltage (Vdc)	GSM 850 Channel #			GSM 1900 Channel #		
	128	190	251	512	662	810
4.37	-15	-14	17	-50	-64	-52
3.8	-16	-14	19	-60	-43	-48
3.23	21	13	21	-40	-36	-54

13 TEST SET UP PICTURES

13.1 Radiated Emissions



13.2 AC Line Conducted Emissions



Evaluation For: Enfora
Model No: EDG0200

FCC ID: MIVEDG0200

14 EUT PICTURES

