

LAIRD TECHNOLOGIES – WORLD COMPLIANCE CENTER			
FCC PART 15 CERTIFICATION Manufacturer: Fidelity TeleAlarm, LLC EUT: S37 Wrist Pendant FCC ID: MIYS37	Document No.	Revision	Issue Date
	160827 X	REV A	29 July 2002
	Purchase Order No.		Page
	01-288		1 of 21

EMC TEST REPORT

Manufacturer: Fidelity TeleAlarm, LLC
Equipment Under Test: S37 Wrist Pendant

Test Report No.: 160827 X
Purchase Order No.: 01-288

DOCUMENT HISTORY

Revision	Issue Date	Affected Page(s)	Description of Modifications	Revised By	Approved By
0	29 July 2002		Initial release		
REV A	29 July 2002	8	Section 7.2 Operating mode		
REV A	29 July 2002	10	Section 8.4 Duty Cycle Correction Factors		
REV A	29 July 2002	17	Correction Factors		

LAIRD TECHNOLOGIES – WORLD COMPLIANCE CENTER			
FCC PART 15 CERTIFICATION Manufacturer: Fidelity TeleAlarm, LLC EUT: S37 Wrist Pendant FCC ID: MIYS37	Document No.	Revision	Issue Date
	160827 X	REV A	29 July 2002
	Purchase Order No.		Page
	01-288		2 of 21

TEST REPORT NO. 160827 X **From** **Laird Technologies** **World Compliance Center**

Test for **Fidelity TeleAlarm, LLC** **S37 Wrist Pendant**

Written By

Bridget A. Keesser

Bridget A. Keesser, EMC Sales Representative

29 July 2002

Date

Reviewed By

Grant Metzgar

Grant Metzgar Sr. EMC Technician

29, JULY 2002

Date

Authorized By

Fred Gardner

F. Fred Gardner, EMC Quality Assurance

29 July 2002

Date

TEST PERSONNEL – Laird Technologies

Grant Metzgar Sr. EMC Technician	15 July 2002
Anthony A. Soffera, EMC Technician	10, 11 July 2002

EUT RECEIPT/DISPOSITION INFORMATION

Date of Receipt of Equipment Under Test (EUT)	10 July 2002
Disposition of EUT	Retained by Manufacturer

Test Facility	Laird Technologies
Address	Shielding Way
City, State Zip Code	Delaware Water Gap, PA 18327
Phone	(570) 424-8510 ext. 1216
Fax	(570) 421-4227

This report may be reproduced in full, partial reproduction may only be made with the written consent of the laboratory. The results in this report apply only to the equipment tested. This report may not be used to claim product endorsement by NVLAP or any agency of the U.S. government.

LAIRD TECHNOLOGIES – WORLD COMPLIANCE CENTER			
FCC PART 15 CERTIFICATION Manufacturer: Fidelity TeleAlarm, LLC EUT: S37 Wrist Pendant FCC ID: MIYS37	Document No.	Revision	Issue Date
	160827 X	REV A	29 July 2002
	Purchase Order No.		Page
	01-288		3 of 21

TABLE OF CONTENTS (This document contains a total of 21 pages.)

1	INTRODUCTION.....	4
1.1	DESCRIPTION OF WORLD COMPLIANCE CENTER	4
1.2	SUMMARY OF WORK DONE	4
1.2.1	Summary of EMC Emission Tests	4
1.2.2	Summary Conclusion / Declaration.....	4
2	CLIENT INFORMATION	4
3	EQUIPMENT UNDER TEST (EUT)	5
3.1	IDENTIFICATION OF EUT	5
3.2	DESCRIPTION OF SYSTEM	5
3.3	TABLE: COMPONENTS OF THE EUT	5
3.4	TABLE: CABLING OF THE EUT.....	5
3.5	ACCESSORY/PERIPHERAL EQUIPMENT	5
3.6	MODIFICATIONS INCORPORATED IN THE EUT.....	5
3.7	CONFIGURATION OF TESTED SYSTEM	6
4	PRODUCT LABELING	7
4.1	LOCATION OF LABEL ON EUT	7
5	TEST SPECIFICATION, METHODS & PROCEDURES	7
5.1	INTENTIONAL RADIATORS	7
6	DEVIATIONS, EXCLUSIONS FROM THE TEST SPECIFICATION.....	8
6.1	DEVIATIONS	8
6.2	EXCLUSIONS	8
7	OPERATION OF EUT DURING TESTING.....	8
7.1	OPERATIONAL ENVIRONMENT	8
7.2	OPERATING MODE(S)	8
7.3	RELATED SUBMITTAL GRANTS	8
8	DETAILED TEST RESULTS.....	9
8.1	ANTENNA REQUIREMENTS.....	9
8.2	RADIATED EMISSIONS.....	9
8.2.1	FCC Part 15 Radiated Emissions Test Results.....	9
8.3	OCCUPIED BANDWIDTH.....	10
8.3.1	FCC Part 15, Paragraph 15.231 (C)	10
8.3.2	Judgement	10
8.4	DUTY CYCLE CORRECTION FACTOR	10
9	TEST EQUIPMENT	10
9.1	RADIATED EMISSIONS.....	10
10	DESCRIPTION OF TEST METHODS	11
10.1	RADIATED EMISSIONS TEST PROCEDURE	11
10.2	OCCUPIED BANDWIDTH	11
11	PHOTOGRAPHS OF TEST ARRANGEMENTS	12
12	SUPPLEMENTAL DATA.....	13

LAIRD TECHNOLOGIES – WORLD COMPLIANCE CENTER			
FCC PART 15 CERTIFICATION Manufacturer: Fidelity TeleAlarm, LLC EUT: S37 Wrist Pendant FCC ID: MIYS37	Document No.	Revision	Issue Date
	160827 X	REV A	29 July 2002
	Purchase Order No.		Page
	01-288		4 of 21

1 INTRODUCTION

This report documents the results of a series of EMI/EMC measurements performed on the EUT described in Section 3 of this report. The purpose of this series of tests was to demonstrate compliance to the radiated emission requirements of FCC Part 15 for intentional transmitters. This report contains a report of the measurements only. The manufacture must also comply with other requirements of the FCC rules such as labeling requirements in order to market the device. Addition information such as the operators manual, block diagrams, schematics and internal photos, which are not included in this report, must be provided to the FCC or appropriate authorities upon request.

Testing was performed by the Laird Technologies at the Delaware Water Gap, Pennsylvania World Compliance Center. Tests were performed using the test set-ups of the relevant standards for tests performed in laboratory conditions.

1.1 Description Of World Compliance Center

Laird Technologies World Compliance Center is an independent EMC test laboratory offering interference control testing for FCC, MIL-STD-461, EMC Directive, Medical Devices Directive, Product Safety, and other requirements, as well as, consulting, design engineering, and compliance seminars.

The World Compliance Center is accredited by NVLAP (LAB CODE: 200076-0) for FCC Part 15, IEC/CISPR 22 AS/NZS 3548 and CNS 13438 for emissions measurements and the IEC 61000 series for immunity tests. The test lab is also assessed by the Civil Aviation Authority for measurements to the EMC Directive for aeronautical equipment. The open area test site and measurement facility used to collect the radiated data is filed with the FCC and accepted in a letter dated 11 August 2000 (Registration Number 90682) and Industry Canada file number IC 3147. Laird Technologies is registered by SGS Yarsley International Certification Services, LTD. to ISO 9001.

All personnel work under the supervision of NARTE approved engineers and technicians.

1.2 Summary of Work Done

Equipment Model Name	S37 Wrist Pendant
U. S. Federal Regulations	47 CFR Chapter 1

1.2.1 Summary of EMC Emission Tests

Specification Name	Test Name	Limit	Judgement
FCC Part 15	Radiated Emissions	Paragraph 15.231 of FCC Part 15	passed by 6.95 dB

1.2.2 Summary Conclusion / Declaration

The EUT as described and reported within this document, meets FCC Part 15 requirements for intentional transmitters as tested in accordance with ANSI C63.4-1992 without any modifications.

2 CLIENT INFORMATION


Company Name	Fidelity TeleAlarm, LLC
Division	A Fidelity Group Company
Address	2501 Kutztown Road
City, State Zip Code	Reading, PA 19605-2961
Contact Name	Jack D. Gulati
Title	Chairman and CEO
Phone	610-929-4200
Fax	610-929-6861

FCC Part 15 Subpart C Section 15.231 **Radiated Emissions @ 3 Meters** **Data Sheet**

Date : 11-Jul-02
Customer Fidelity Technologies
Order #: 160827 X
EUT : S37 Transmitter
Tech : Anthony A. Soffera

	Frequency (MHz)	Measured Level (dBuV)	Antenna Factor +(dB)	Cable Loss +(dB)	Preamp Gain -(dB)	Corrected Level (dBuV/m)	Spec Limit (dBuV/m)	Polarity (V/H)	Delta to Limit	Restricted Bands
1	434	78.3	17.3	4.4	32	68.00	80.83	V	-12.53	No
2	868	40.4	23	7.6	32	39.00	60.83	V	-21.83	No
3	1302	43.9	26.27	3	30.17	43.00	53.97	V	-10.97	Yes
4	1736	44.1	27.4	3.17	29.66	45.01	60.83	V	-15.82	No
5	2170	44.2	28.44	3.33	29	46.97	60.83	V	-13.86	No
6	2604	40.5	29.01	3.33	29.17	43.67	60.83	V	-17.16	No
7	3038	37.1	30.72	4.17	27.66	44.33	60.83	V	-16.50	No
8	3472	34.8	31.69	5.33	25.17	46.65	60.83	V	-14.18	No
9	3906	33.5	32.67	5.50	24.67	47.00	53.97	V	-6.97	Yes
10	4340	33.2	33.32	5.50	25.00	47.02	53.97	V	-6.95	Yes

Duty Cycle Correction Factor : 0
 Duty Cycle Correction Factor not applied

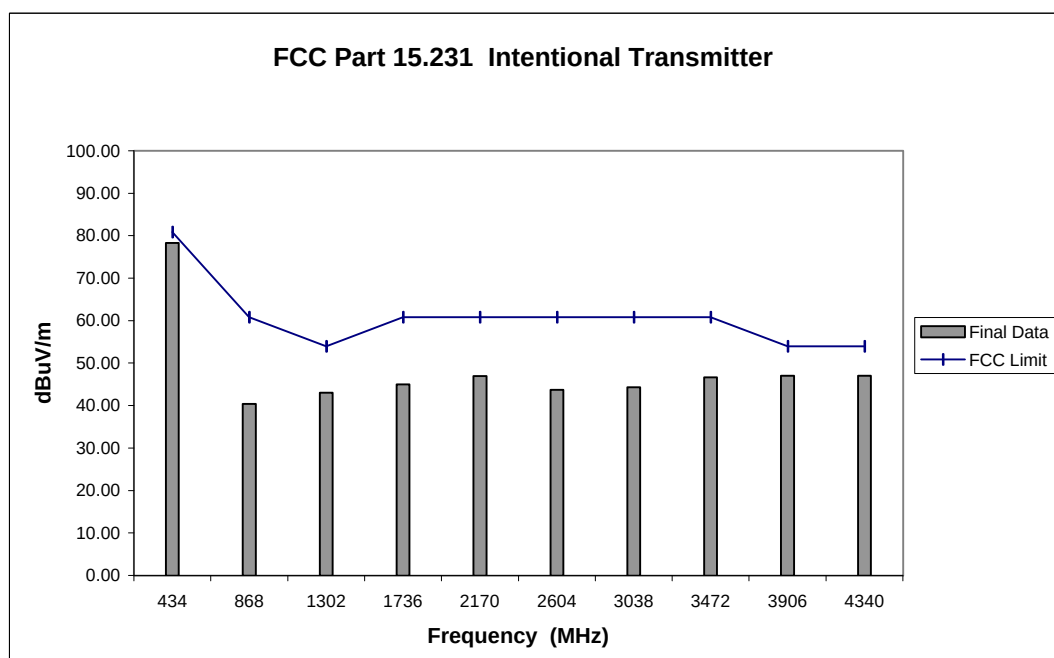

LAIRD TECHNOLOGIES – WORLD COMPLIANCE CENTER			
FCC PART 15 CERTIFICATION Manufacturer: Fidelity TeleAlarm, LLC EUT: S37 Wrist Pendant FCC ID: MIYS37	Document No.	Revision	Issue Date
	160827 X	REV A	29 July 2002
	Purchase Order No.		Page
	01-288		5 of 21

3 EQUIPMENT UNDER TEST (EUT)

3.1 Identification of EUT

S37 Wrist Pendant

3.2 Description of System

S37 Wrist Pendant is a transmitter used in the NurseCall 2 system to alert staff to a call for help that may be patient-initiated or staff-initiated and provide a means to reset (cancel) the alarm.

3.3 Table: Components of the EUT

The EUT was tested as a stand-alone system.

3.4 Table: Cabling of the EUT

There is no associated cabling with the EUT.

3.5 Accessory/Peripheral Equipment

The EUT was tested as a stand-alone system.

3.6 Modifications Incorporated in the EUT

No modifications were made to the EUT as a result of the EMC testing.

LAIRD TECHNOLOGIES – WORLD COMPLIANCE CENTER

FCC PART 15 CERTIFICATION
Manufacturer: Fidelity TeleAlarm, LLC
EUT: S37 Wrist Pendant
FCC ID: MIYS37

Document No.

160827 X

Revision

REV A

Issue Date


29 July 2002

Purchase Order No.

01-288

Page

6 of 21

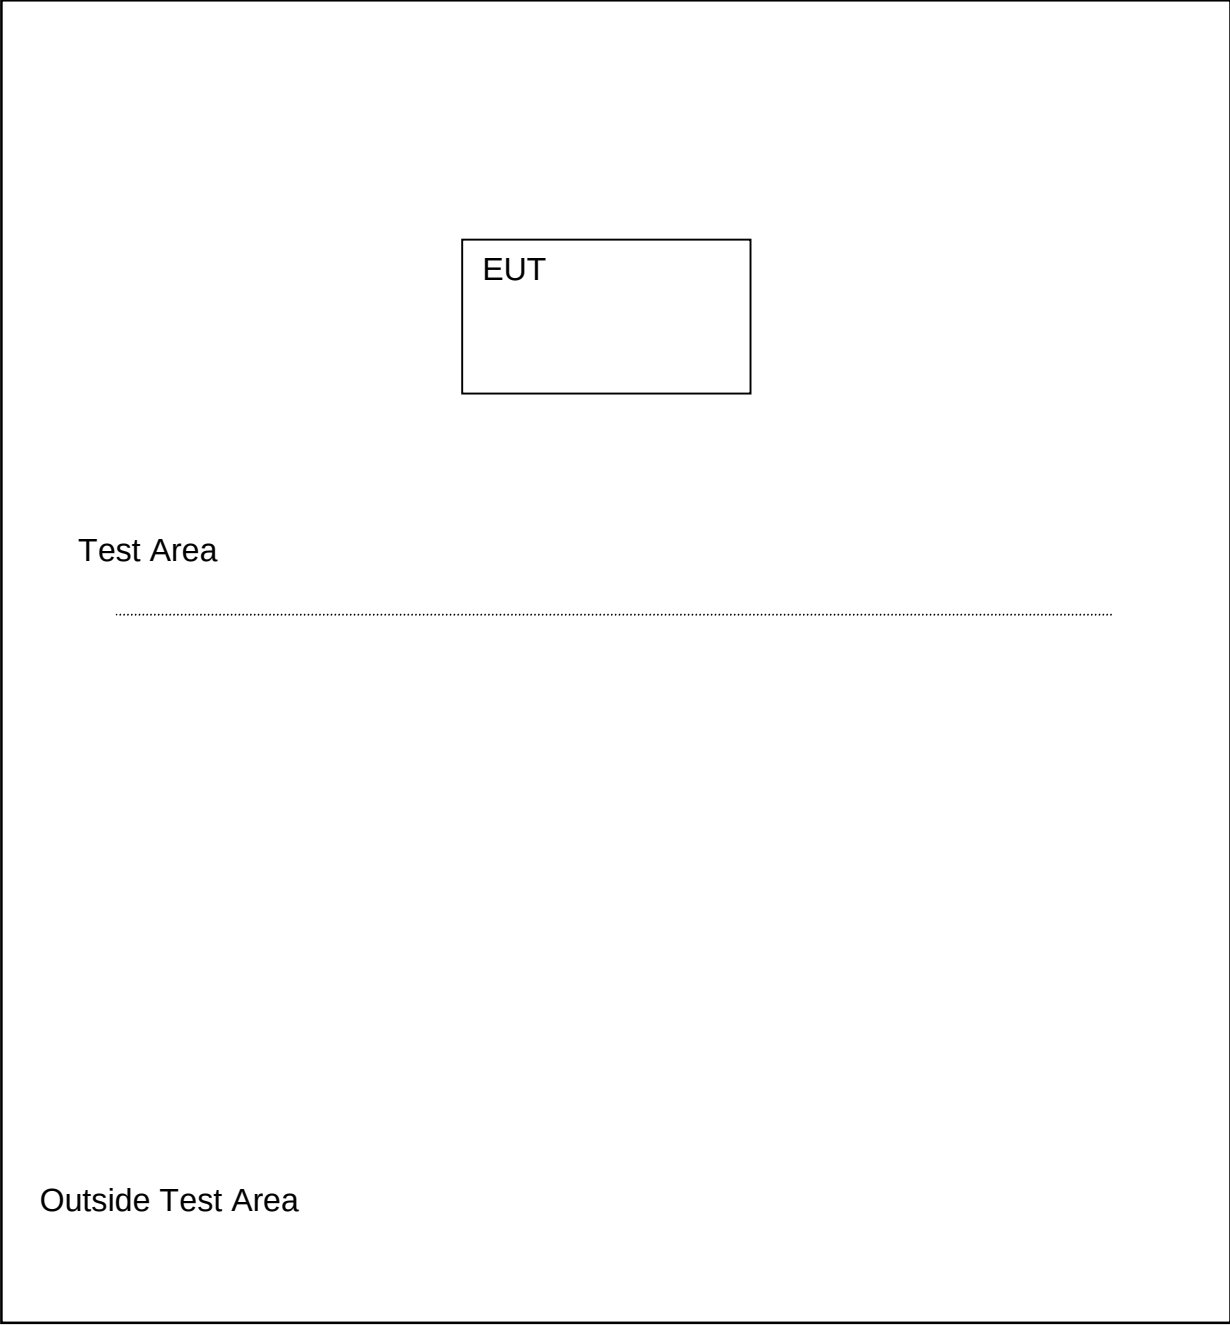3.7 Configuration of Tested System

EUT

Test Area

.....

Outside Test Area

LAIRD TECHNOLOGIES – WORLD COMPLIANCE CENTER			
FCC PART 15 CERTIFICATION Manufacturer: Fidelity TeleAlarm, LLC EUT: S37 Wrist Pendant FCC ID: MIYS37	Document No.	Revision	Issue Date
	160827 X	REV A	29 July 2002
	Purchase Order No.		Page
	01-288		7 of 21

4 PRODUCT LABELING

Labels are to follow the existing size requirements in that they must contain letters, numbers and symbols that are visible and readable without the use of magnification.

When the device is so small or for such use that is not practicable to place the statement specified on the label, such as for a CPU board or a plug-in circuit board peripheral device, the text associated with the logo may be placed in a prominent location in the instructional manual or pamphlet supplied to the user. However, the unique identification (trade name and model number) and the logo must be displayed on the device.

All warning statements regarding interference potential are to be placed in the user manual, rather than on the label as is currently required. The user manual contains general operating instruction on the use of a device, and, according to the FCC, placing the warning statements in the user manual would better serve the consumer. The requirement that an informational statement be included in the user's manual regarding actions the user can take to resolve any interference that may occur from use of the device is still required.

The label showing the equipment identification data may be combined with a label showing other information (serial numbers, other government requirements, etc.), if desired. Compliance statements, when required, may be shown on the same label or a separate label.

County of Origin – US Customs and the Federal Trade Commission regulations require all equipment produced in foreign countries to be marked with the country of origin. Questions concerning marking of equipment with the country of origin should be directed to these agencies.

4.1 Location of Label on EUT

The label indicating the FCC ID will be located on the device.

The following label requirements of Section 2.925/2.926 and 15.19 will be placed in the operation manual:

This device complies with Part 15 of the FCC rules and regulations.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) This device must accept any interference received, including interference that may cause undesired operation.

5 TEST SPECIFICATION, METHODS & PROCEDURES

5.1 Intentional Radiators

Test Specification	Date	Title
47 CFR Chapter 1	10-1-01	Part 15 – Radio Frequency Devices Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Chapter 1 (10-1-01 Edition). Part 15, Subpart C- Intentional Radiators: Paragraph 15.203 – Antenna requirement, : Paragraph 15.205– restricted bands of operation, Paragraph 15.209 – Radiated emission limits; general requirements, Paragraph 15.231 – Periodic operation in the band 40.66-40.70 MHz and above 70 MHz.

LAIRD TECHNOLOGIES – WORLD COMPLIANCE CENTER			
FCC PART 15 CERTIFICATION Manufacturer: Fidelity TeleAlarm, LLC EUT: S37 Wrist Pendant FCC ID: MIYS37	<i>Document No.</i>	<i>Revision</i>	<i>Issue Date</i>
	160827 X	REV A	29 July 2002
	<i>Purchase Order No.</i>		<i>Page</i>
	01-288		8 of 21

6 DEVIATIONS, EXCLUSIONS FROM THE TEST SPECIFICATION

6.1 Deviations

The measurements were performed in accordance with the requirements of the test specification and the basic standards.

6.2 Exclusions

There were no exclusions from the test specification.

7 OPERATION OF EUT DURING TESTING

7.1 Operational Environment

The EUT is powered from an internal battery and was tested as a portable device using an artificial hand in accordance with ANSI C63.4. The EUT transmit frequency was 434 MHz.

7.2 Operating Mode(s)

The EUT was tested for radiated emissions and spurious harmonics with the EUT modified to provide a continuous CW signal.

In normal operation the unit is restricted to periodic operation in accordance with FCC Part 15 paragraph 15.231. The transmitter once activated automatically ceases transmission within 3 seconds after activation.

7.3 Related Submittal Grants

The following transmitters are related submittal grants: FCC ID: MIY S36-10 and FCC ID: MIY S36-9.

LAIRD TECHNOLOGIES – WORLD COMPLIANCE CENTER			
FCC PART 15 CERTIFICATION Manufacturer: Fidelity TeleAlarm, LLC EUT: S37 Wrist Pendant FCC ID: MIYS37	Document No.	Revision	Issue Date
	160827 X	REV A	29 July 2002
	Purchase Order No.		Page
	01-288		9 of 21

8 DETAILED TEST RESULTS

8.1 Antenna Requirements

There is no external antenna or customer replaceable antenna and therefore meets the requirements of FCC Part 15, paragraph 15.203.

8.2 Radiated Emissions

Testing was performed according to the procedures in ANSI C63.4-1992. Radiated testing was performed at an EUT to antenna distance of 3 meters. The following data lists the significant emission frequencies, measured levels, correction factor (includes cable, preamplifier and antenna corrections), the corrected reading, plus the limit. Spectrum analyzer plots, additional tabulated data and environmental ambient conditions are included in the Appendices of this document.

8.2.1 FCC Part 15 Radiated Emissions Test Results

8.2.1.1 FCC Part 15, Paragraph 15.209 Radiated Emissions Limits, general requirements.

Frequency Range MHz	3 meter Limit dB(μV/m)
30 – 88	40.0
88 – 216	43.52
216 – 960	46.02
960 and above	53.97

8.2.1.2 FCC Part 15, Paragraph 15.231 Periodic operation in the band 40.66-40.70 MHz and above 70 MHz

Fundamental Frequency	Field strength of fundamental	Field strength of spurious emissions
434 MHz	80.83 dBμV/m	60.83 dBμV/m

8.2.1.3 Table: Judgement

EUT	S37 Wrist Pendant
Judgement	Passed by 6.95 dB*

* average measurements not applied

8.2.1.4 Table: Summary of Highest Radiated Emissions Levels

Frequency MHz	Polarity V/H	Antenna Height cm	Antenna Azimuth deg	Correction Factor dB(1/m)	Limit dB(μV/m)	Corrected Reading dB(μV/m)	Margin dB
4340	V	100	270	13.82	53.97	47.02	-6.95
3906	V	100	270	13.50	53.97	47.00	-6.97
1302	V	100	270	-0.90	53.97	43.00	-10.97
2170	V	100	270	2.77	60.83	46.97	-13.86
3472	V	100	270	11.85	60.83	46.65	-14.18
1736	V	100	270	0.91	60.83	45.01	-15.82

Measurements were made in peak detection with an IF bandwidth of 120 kHz, along with a 100 ms sweep time. Measurements above 1 GHz were made with a 1MHz IF bandwidth. A video filter was not used.

8.2.2 Measurement Uncertainty

The measurement uncertainty (with a confidence level of 95%) for this test was: +/- 5.59 dB

LAIRD TECHNOLOGIES – WORLD COMPLIANCE CENTER			
FCC PART 15 CERTIFICATION Manufacturer: Fidelity TeleAlarm, LLC EUT: S37 Wrist Pendant FCC ID: MIYS37	Document No.	Revision	Issue Date
	160827 X	REV A	29 July 2002
	Purchase Order No.		Page
	01-288		10 of 21

8.2.3 Measured Calculation

Voltage measurements from FCC requirements were converted to logarithmic values using:
 $\text{dB}\mu\text{V} = 20_{10} \log (V/1 \times 10^{-6})$

The field strength is calculated by adding the antenna factor and cable factor, and subtracting the amplifier gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$\text{FS} = \text{RA} + \text{AF} + \text{CF} - \text{AG}$$

where:

FS = field strength - dB($\mu\text{V}/\text{m}$)

RA = receiver amplitude - dB(μV)

AF = antenna factor - dB/m

CF = cable attenuation factor - dB

AG = amplifier gain - dB

Example: Assume a receiver reading of 52.5 dB(μV) is obtained. The antenna factor of 7.4 and cable factor of 1.1 is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 dB($\mu\text{V}/\text{m}$.)

8.3 Occupied Bandwidth

8.3.1 FCC Part 15, Paragraph 15.231 (C)

The bandwidth of the emission shall be no wider than 0.25% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

8.3.2 Judgement

The EUT complies with the occupational bandwidth requirements. See the supplemental data for plots of the bandwidth measurements.

8.4 Duty Cycle Correction Factor

All signals were measured in a peak detection and no duty cycle correction factors were applied to the measurements. During the CW measurements the pulse train consisted of an on time of 116 μsec and an off time of 104 μsec per pulse. This corresponds to 52.66 m sec on time and 47.21 m sec off time over a 100 m second period. The percent on time is 52.66 m sec divided by 100 m sec or 0.5266 percent. This corresponds to a -5.6 dB reduction or 20 log 0.5266. In a similar manor the duty cycle over 100 m sec is presented for the modulated waveform.

Plots of the duty cycle measurements can be found in Section 12.

9 TEST EQUIPMENT

The absolute performance calibration of equipment requiring calibration is performed on an as needed basis in accordance with MIL-STD 45662. However, calibration periods do not exceed one (1) year except for the E-Field sensors which have a two (2) year calibration interval. The test equipment is capable of making measurements within tolerances of at least +/- 2 dB amplitude and +/- 2% frequency deviation. Equipment certifications showing traceability to NIST (National Institute of Standards and Technology) are maintained on file at Laird Technologies Corporate offices in Delaware Water Gap, PA.

9.1 Radiated Emissions

Mfg./Model	Description	Serial	Calibration Due
CHA/CBL6111A	(30 MHz – 1 GHz) bilog	1822	4/9/03
EMCO 3155	(1 – 18 GHz) double ridge guide antenna	2485	11/15/02
HP/8572A	(100 Hz – 22 GHz) EMI receiver sys #1	3010A01163	7/1/03
HP/8574B	(100 Hz – 1.5 GHz) EMI receiver sys #3	3010A01136	8/24/02
HP/85879A	EMI Radiated Emissions Measurement software	VA 02.01	Calibration Not Required

LAIRD TECHNOLOGIES – WORLD COMPLIANCE CENTER			
FCC PART 15 CERTIFICATION Manufacturer: Fidelity TeleAlarm, LLC EUT: S37 Wrist Pendant FCC ID: MIYS37	Document No.	Revision	Issue Date
	160827 X	REV A	29 July 2002
	Purchase Order No.		Page
	01-288		11 of 21

10 DESCRIPTION OF TEST METHODS

10.1 Radiated Emissions Test Procedure

Test Specification: FCC Part 15

Test Location: The elevated open area test site (OATS) used to collect the radiated data is located at the Laird Technologies test facility in Delaware Water Gap, Pennsylvania. This site has been fully described in a report submitted to the Federal Communication Commission (31040/SIT 1300F2). The OATS meets the ANSI C63.4: 1992, normalized site attenuation requirements at three (3) and ten (10) meters.

Test Setup: The EUT was setup on the OATS in a typical installation configuration. The EUT was configured for continuous CW operation. The EUT was set up in the following manner:

Table-top Equipment: The EUT was placed 80 centimeters above the ground plane on a non-conductive tabletop 1.0 meter wide x 1.5 meters long. The amplitude level of the emissions were maximized by varying the configuration of the EUT and peripherals.

Test Procedure: Measurements were performed in accordance with ANSI C63.4: 1992. The radiated emissions were measured using a receiver system that meets the fundamental characteristics of CISPR Publication 16. The measurements were performed with a quasi-peak adapter bandwidth of 120 kHz, unless otherwise noted on the data sheet. The measurement antennas are calibrated in accordance with ANSI C63.5: 1988.

A suspect frequency list was compiled with the following information:

- B) Preliminary radiated scan – performed in a shielded enclosure
- B) List of crystal oscillators installed in EUT and auxiliary equipment

The highest emissions were maximized by rotating the turntable 360 degrees and varying the antenna height 1 to 4 meters. The frequency range of 30 MHz to 1000 MHz was measured using a Bilog antenna. Measurements above 1 GHz were made using a double ridge wave guide antenna. Measurements were made in vertical and horizontal antenna polarizations. The peak measurements within 5 dB of the specification limits were re-measured with the receiver in either quasi-peak or average detection as required. Amplitude levels were recorded in dBμV/m.

10.2 Occupied Bandwidth

Occupied bandwidth measurements were made with the EUT operated in a CW continuous mode. The receiver bandwidth was set for 100 kHz and peak measurements were made at 20 dB down from the peak measurement. Due to the short duration of the pulse modulated measurements were not possible. However, preliminary data indicated that the occupied bandwidth would not be significantly larger with the modulation.

LAIRD TECHNOLOGIES – WORLD COMPLIANCE CENTER			
FCC PART 15 CERTIFICATION Manufacturer: Fidelity TeleAlarm, LLC EUT: S37 Wrist Pendant FCC ID: MIYS37	<i>Document No.</i>	<i>Revision</i>	<i>Issue Date</i>
	160827 X	REV A	29 July 2002
	<i>Purchase Order No.</i>		<i>Page</i>
	01-288		12 of 21

11 PHOTOGRAPHS OF TEST ARRANGEMENTS

<i>Photo Layout</i>	<i>Test Type</i>	<i>Basic Standard</i>	<i>Page No.</i>
Top	Radiated Emissions	FCC Part 15	13
Bottom	Radiated Emissions	FCC Part 15	



Class B radiated emissions at 3 meters



Class B radiated emissions at 3 meters

LAIRD TECHNOLOGIES – WORLD COMPLIANCE CENTER			
FCC PART 15 CERTIFICATION Manufacturer: Fidelity TeleAlarm, LLC EUT: S37 Wrist Pendant FCC ID: MIYS37	Document No.	Revision	Issue Date
	160827 X	REV A	29 July 2002
	Purchase Order No.		Page
	01-288		14 of 21

12 SUPPLEMENTAL DATA

Test Type	Specification	Comments	Data Format	Page No.
Radiated Emissions	FCC Part 15	Radiate measurement below 1 GHz	plotted	15
		Radiated measurements 434 MHz to 4340 MHz	tabulated	16
		Bandwidth Fundamental	tabulated	17
Duty Cycle	FCC Part 15.231	CW duty cycle on time	Plotted	18
Duty Cycle	FCC Part 15.231	CW duty cycle off time	Plotted	19
Duty Cycle	FCC Part 15.231	CW duty cycle over 100 m sec	Plotted	20
Duty Cycle	FCC Part 15.231	Modulated duty cycle over 100 m sec	Plotted	21

hp

EMISSION LEVEL [dBuV/m]

WORLD COMPLIANCE CENTER

90

70

50

30

10

300

FINAL SIGNALS

FCC PART 15 CLASS B @ 3m
FIDELITY TELEALARM LLS
TELEALARM S37 TRANSMITTER
TRANSMITTING CONTINUOUSLY
TEST NO. 2 3VDC BATTERY

FREQUENCY [MHz]

1000

LAIRD TECHNOLOGIES
WORLD COMPLIANCE CENTER
TEST DATA

REPORT No.: 160827 DATE: 11 JULY 2002 TEST No.: 2
TITLE OF TEST: FCC PART 15 CLASS B @ 3 METERS
CUSTOMER: FIDELITY TELEALARM LLS
EUT DESCRIPTION: S37 TRANSMITTER
TEST MODE: TRANSMITTING CONTINUOUSLY
SERIAL No.: 3671 H1237L8
FREQUENCY RANGE: 30 - 1000 MHz SENSOR LOCATION/POLARIZATION: WORSE CASE
INPUT POWER: 3 VDC TEMP: 69.3 f HUM: 43.0 % BAR: 30.25 "
TEST PERFORMED BY: ANTHONY A. SOFFERA
TEST RESULTS: UNDER LIMIT
TEST CONDITIONS: TABLE TOP ARRANGEMENT.
TESTED WITH ARTIFICIAL HAND.

PRODUCT EMISSIONS

FCC PART 15 CLASS B @ 3m


Data File: TEST NO. 2


11 JULY 02

No	EMISSION	SPEC LIMIT	MEASUREMENTS			SITE		CORR FACTOR	COMMENTS
	FREQUENCY MHz		ABS	dLIM	MODE	POL	HGT cm	AZM deg	
1	434.036		68.0		PK	V	122	270	-10.3
2	868.031		39.0		PK	V	122	270	-1.4

16 of 21

13 JUL 10Z
331 TRANSMITTER OCCUPIED BANDWIDTH 20dB down
MEASURED @ 172 KHz

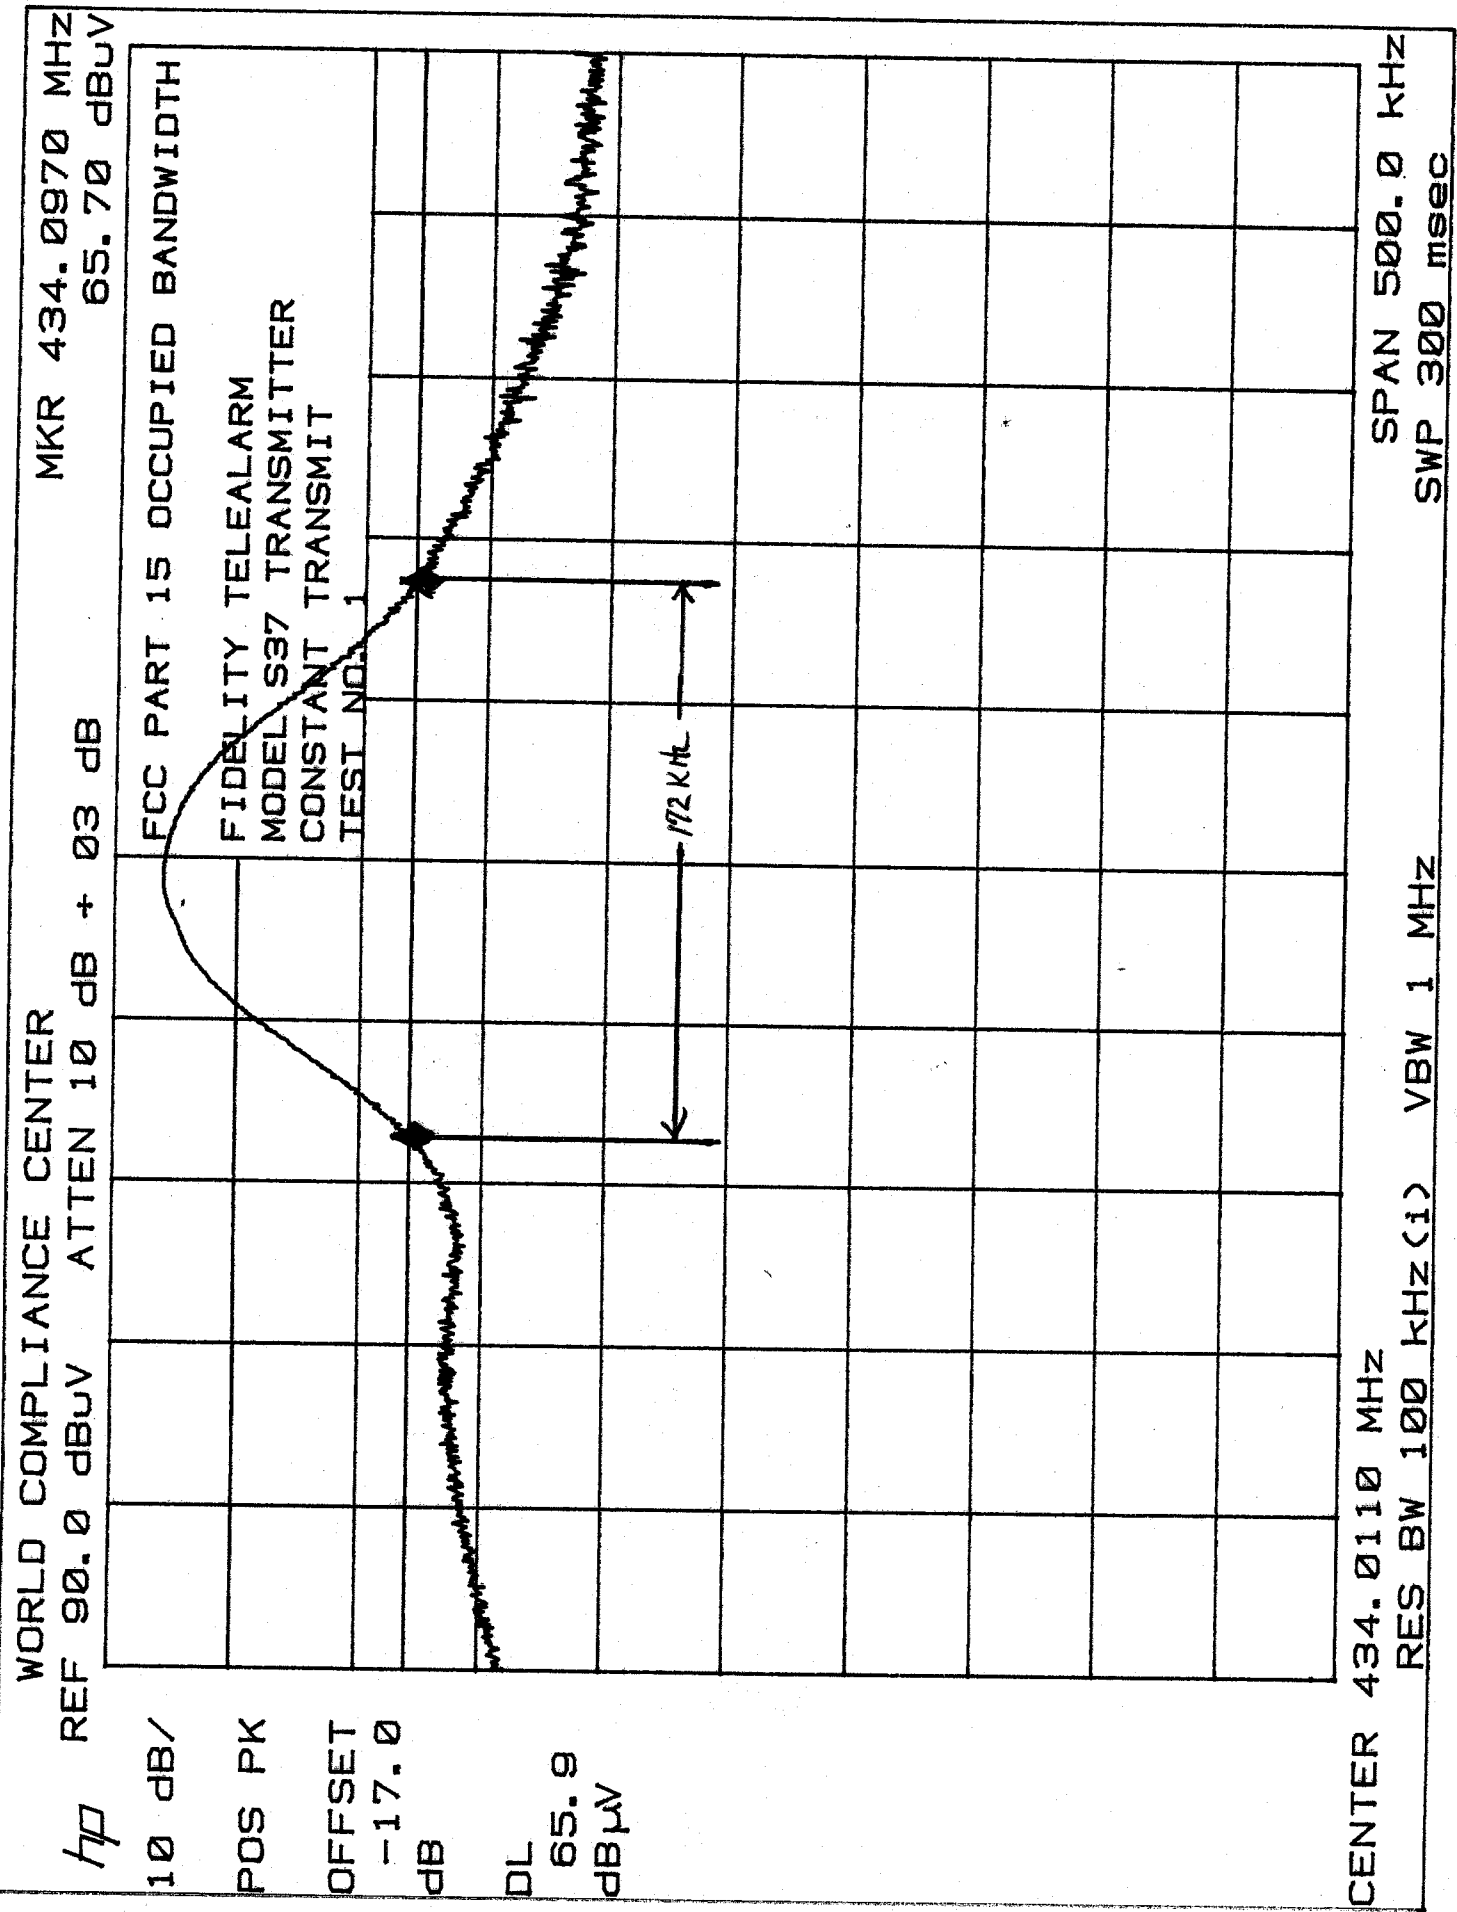

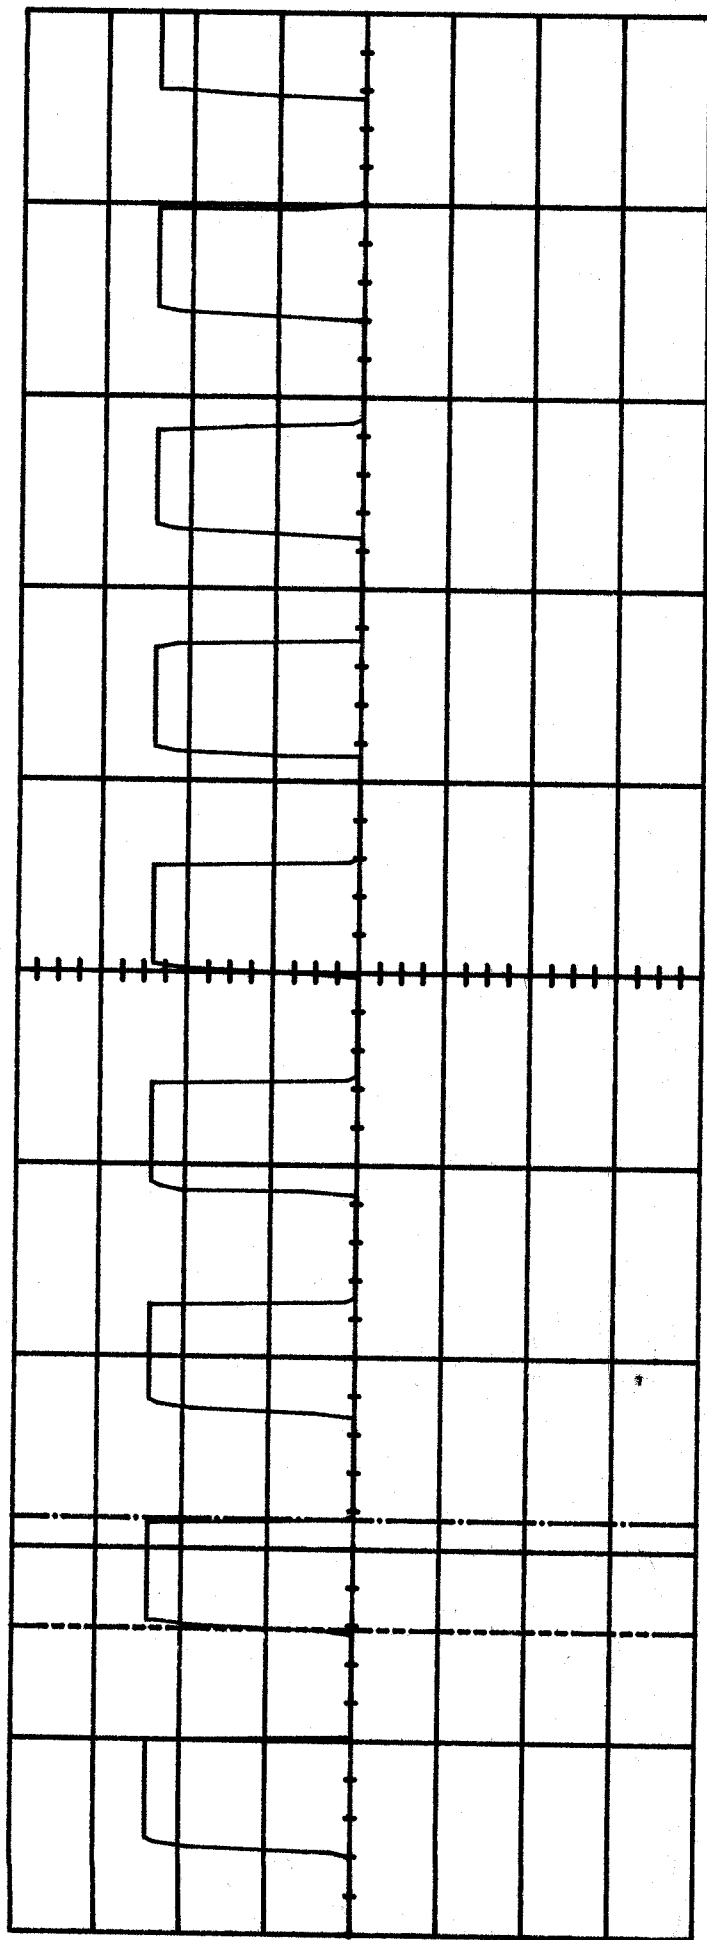


Main Timebase Delay/Pos Reference Mode Markers
 200 us/div 0.00000 s Center Realtime (NORMAL)
 Channel 1 Sensitivity Offset Probe Coupling
 1.00 V/div 0.00000 V 10.00 : 1 dc (1M ohm)

stop -588.000 us
 start -584.000 us
 delta t 116.000 us
 1/delta t 8.62069 kHz


Trigger mode : Edge
 On Positive Edge Of Chan1
 Trigger Level
 Chan1 = 1.00000 V (noise reject OFF)
 Holdoff = 120.000 ns

190821

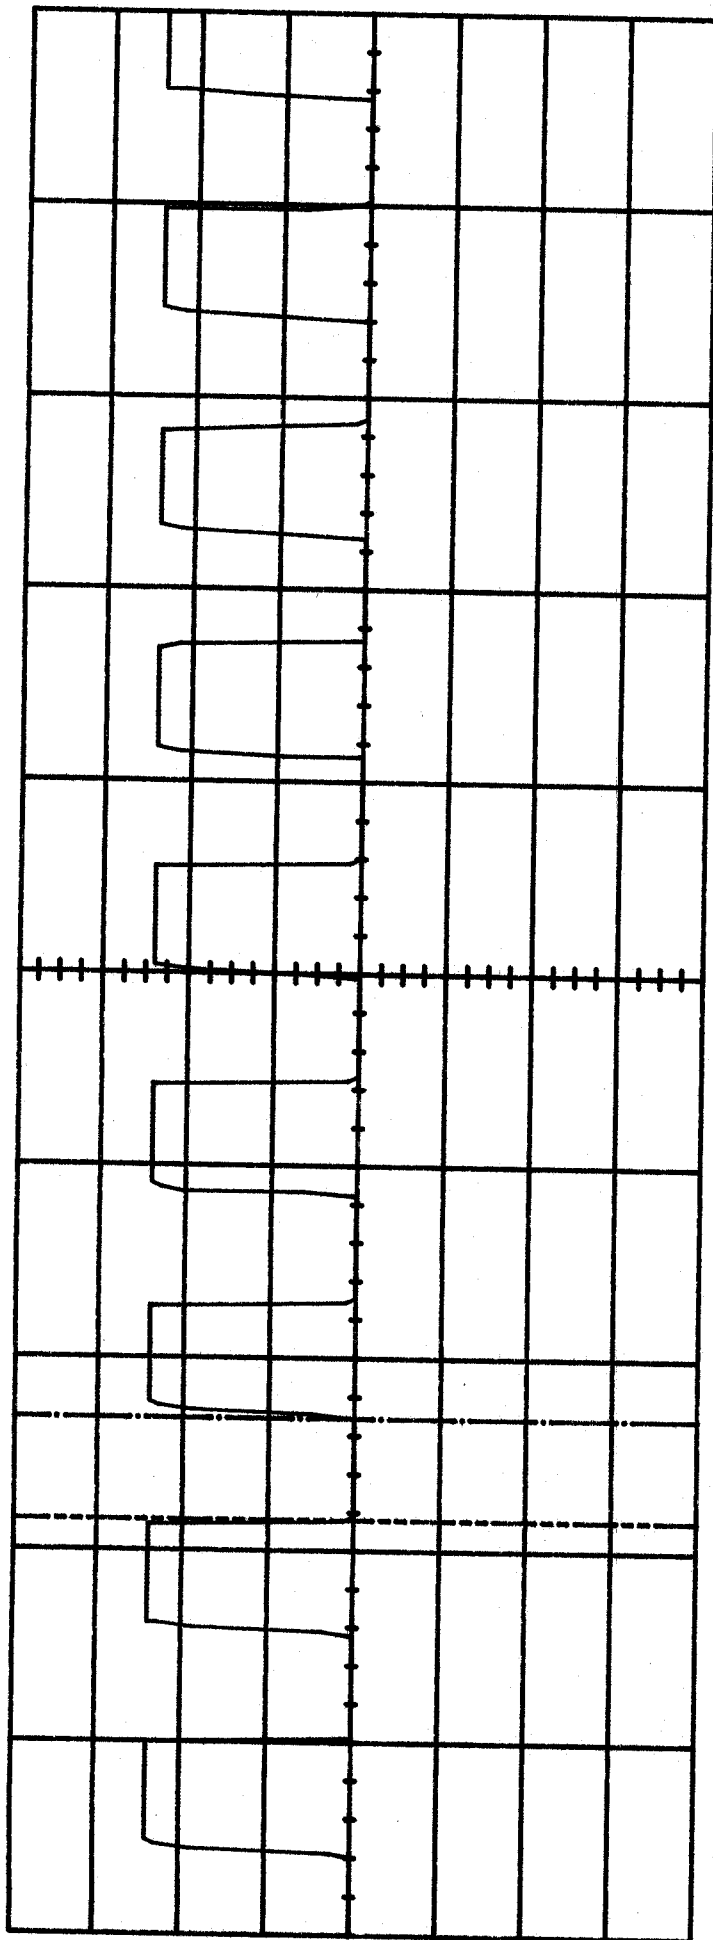

Main Timebase 200 us/div Delay/Pos 0.00000 s Reference Center Mode Realtime (NORMAL) Markers - -484.000 us
 Channel 1 Sensitivity 1.00 V/div Offset 0.00000 V Probe 10.00 : 1 Coupling dc (1M ohm) stop - -568.000 us
 delta t - 104.000 us
 1/delta t - 9.61538 kHz

Trigger mode : Edge
 On Positive Edge Of Chan1
 Trigger Level
 Chan1 = 1.00000 V (noise reject OFF)
 Holdoff = 120.000 ns

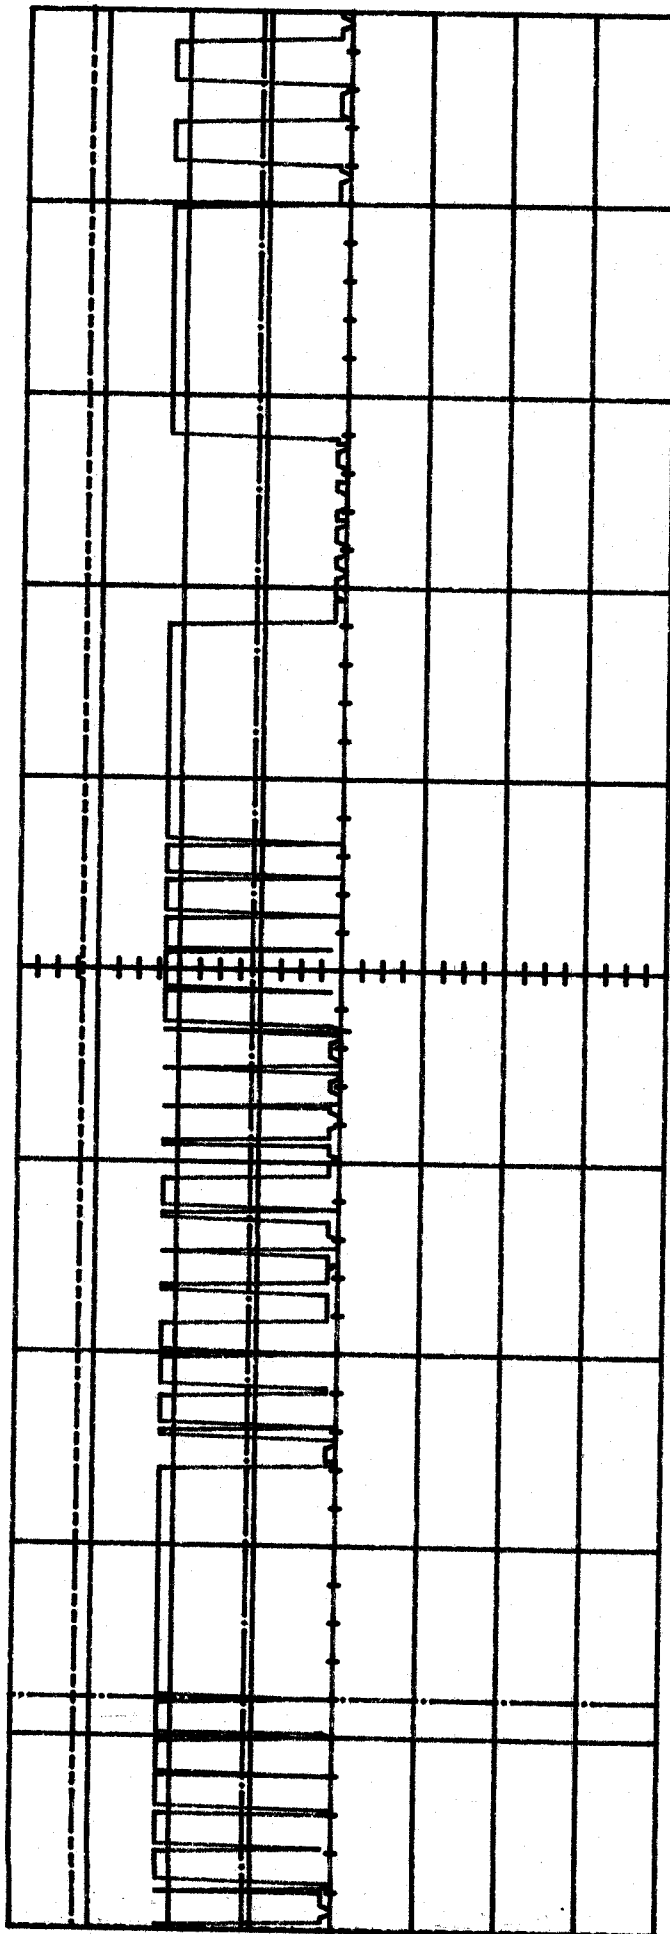

Main	Timebase	Delay/Pos	Reference	Mode	Markers
	10.0 ms/div	-10.0000 ms	Left	Realtime (NORMAL)	Vmarker2 (c1) = 320.000 mV
Channel 1	Sensitivity	Offset	Probe	Coupling	Vmarker1 (c1) = 109.375 mV
	1.00 V/div	0.00000 V	10.00 : 1	dc (1M ohm)	delta V (c1) = 210.625 mV
Trigger mode : Edge					stop = 2.00000 ms
On Negative Edge Of Chan1					start = -12.4000 ms
Trigger Level					delta t = 14.4000 ms
Chan1 = 5.000 mV (noise reject OFF)					1/delta t = 69.4444 Hz
Holdoff = 2 Events					