

B-HYVE XR

SMART INDOOR/OUTDOOR SPRINKLER TIMER



 Note: If replacing a timer, it is helpful to take a photo of the wires before you remove them from the old timer.



Note: We recommend you consult an electrician for hardwired installations.

Note: For optimum timer performance, connect the Wi-Fi to receive the latest timer updates.

FUNCTION	BUTTON PRESS
Manual Watering - WATER ALL ZONES	Hold until the display shows MANUAL and flashes WATER ALL ZONES. To WATER ALL ZONES for a default of 10 min. each*, wait without pressing a button until WATER ALL ZONES stops flashing and watering will begin.
Manual Watering - WATER A PROGRAM	Hold until the display shows MANUAL and flashes WATER ALL ZONES. Quickly press again and WATER A PROGRAM appears. Wait until WATER A PROGRAM stops flashing and press to select the desired program to run. Once the program letter stops flashing, watering will begin.

*Default watering time for "WATER ALL ZONES" can be customized in the B-hive App settings.


instructions continued on back ➡



THE B-HYVE APP

Install the B-hyve® app on your smart device

You will need a smart device to connect the timer to Wi-Fi.

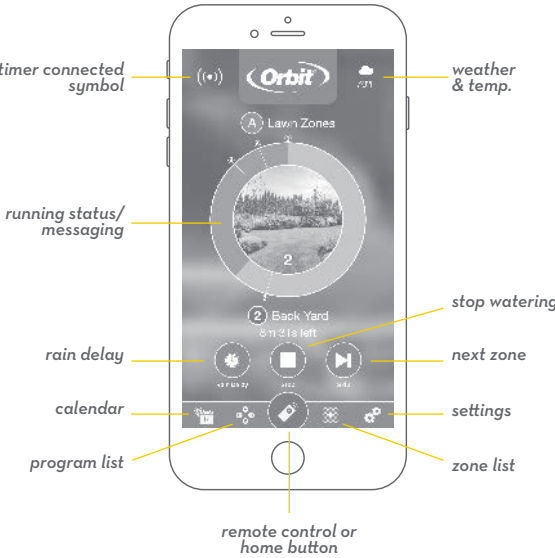

Note: The app will guide you through initial set up of your sprinkler timer. In addition, there are help icons throughout the app with more information and useful tips.

FCC & IC Statement

This device complies with Part 15 of the FCC Rules and Industry Canada license exempt RSS standards. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. FCC Warning: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help This device meets the FCC and IC requirements for RF exposure in public or controlled environments. The end user is advised to maintain a distance of 20 cm from the controller and any personnel to ensure compliance with RF exposure regulations. This Class B digital apparatus complies with Canadian ICES-003

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

DÉCLARATION DE FCC ET L'IC

Cet appareil est conforme à la section 15 de la Règlementation de la FCC et la norme RSS d'Industry Canada. Son fonctionnement est soumis aux deux conditions suivantes: (1) cet appareil ne doit pas causer d'interférences nuisibles, et (2) cet appareil doit tolérer toutes les interférences, dont les interférences pouvant causer un fonctionnement non désiré. Cet appareil numérique de classe B est conforme à la norme canadienne ICES-003.

Remarque: cet appareil été testé et déclaré conforme aux limites d'exposition pour les appareils numériques de classe B, selon la section 15 de la Règlementation de la FCC. Ces limites sont conçus pour fournir une protection raisonnable contre les interférences nuisibles dans une installation résidentielle. Cet appareil produit, utilise et peut émettre de l'énergie radio fréquence et, si elle n'est pas installée et utilisée conformément aux instructions, peut causer des interférences nuisibles aux communications radio. Cependant, il n'est pas garantie que des interférences ne se produisent pas dans une installation particulière. Si cet appareil cause des interférences gênantes à la réception d'un signal radio ou de télévision, ce qui peut être déterminé en allumant et en éteignant l'appareil, l'utilisateur peut corriger les interférences en suivant une des mesures suivantes :

- Réorientez ou repositionnez l'antenne de réception.
- Augmentez la distance entre l'appareil et le récepteur.
- Branchez l'appareil dans une prise sur un circuit différent du circuit sur lequel le récepteur est branché.
- Consulter le revendeur ou un technicien radio/TV expérimenté pour obtenir de l'aide. Cet appareil est conforme aux exigences de la FCC et de l'IC concernant l'exposition aux ondes dans un environnement public ou contrôlé. Il est conseillé à l'utilisateur final de maintenir une distance de 20 cm du contrôleur pour assurer la conformité aux réglementations d'exposition RF. Information de conformité pour le Canada

Ce matériel est complété par une exposition de rayonnements FCC pour un environnement naturel. Ce matériel doit être installé et se faire avec une distance minimale de 20cm entre les radiateurs et les autresYour body shop.

SPECIFICATIONS

Rated input:

Australia—240V AC 50/60Hz 0.15A
Europe—230VAC 50/60Hz 0.15A
USA—120V AC 60Hz 0.2A

Max load:

AUS & EU—24V AC 1 Amp 50/60 Cycle
USA—24VAC 1 Amp 60Hz

Temperature Operating Range:

Operating: 32-158° F (0-70° C)

Storage & transport:

-4-176° F (-20-80° C)

Humidity Operating Range:

Operating: 0-80% | Storage & transport: 0-90%

Altitude:

6,500' (2,000 meters)

IP65 Rating

Installation Class II

Over Voltage Category II

Battery Specifications:

Timer includes a non-replaceable CR2032 Lithium battery.

This timer works with any standard 24V irrigation solenoid. The internal fuse is non-replaceable.

Need Help?

If the app and the website don't have what you're looking for, please go to our website before returning this sprinkler timer to the store.



call us

1-801-299-5555



email us

support@orbitbhyve.com



text us

801-905-8260

or visit us at:

