



FCC RADIO TEST REPORT

Applicant	: Golight Inc
Address	: 37146 Old Highway 17 Culbertson, NE 69024 United States
Equipment	: Searchlight
Model No.	: 30222
Trade Name	: GOLIGHT
FCC ID	: MMK30222

I HEREBY CERTIFY THAT :

The sample was received on May. 29, 2026 and the testing was completed on Jun. 12, 2026 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory



**CONTENTS**

1. Summary of Test Procedure and Test Results	4
1.1 Applicable Standards	4
2. Test Configuration of Equipment under Test.....	5
2.1 Feature of Equipment under Test.....	5
2.2 Carrier Frequency of Channels.....	5
2.3 Test Mode and Test Software.....	6
2.4 Description of Test System.....	7
2.5 General Information of Test.....	8
2.6 Measurement Uncertainty	9
3. Test Equipment and Ancillaries Used for Tests.....	10
4. Antenna Requirements.....	11
4.1 Standard Applicable	11
4.2 Antenna Construction and Directional Gain.....	11
5. Test of AC Power Line Conducted Emission	12
5.1 Test Limit	12
5.2 Test Procedures	12
5.3 Typical Test Setup	13
5.4 Test Result and Data	14
5.5 Test Photographs	16
6. Test of Spurious Emission (Radiated)	17
6.1 Test Limit	17
6.2 Test Procedures	17
6.3 Typical Test Setup	18
6.4 Test Result and Data (Fundamental Emission+ Bandedge).....	19
6.5 Test Result and Data (9kHz ~ 30MHz)	31
6.6 Test Result and Data (30MHz ~ 1GHz)	31
6.7 Test Result and Data (1GHz ~ 3GHz).....	33
6.8 Test Result and Data (3GHz ~ 18GHz).....	39
6.9 Test Result and Data (18GHz ~ 25GHz).....	51
6.10 Restricted Bands of Operation	53
6.11 20dB Bandwidth Measurement Data	54
6.12 Test Photographs (30MHz ~ 1GHz).....	56
6.13 Test Photographs (1GHz ~ 25GHz).....	57



History of this test report

Report No.	Issued Date	Description
26050375-TRDFCC01	Jun. 15, 2026	Original

Report Type		Description
■	Original report	NA



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024

FCC Rules and Regulations Part 15 Subpart C §15.249

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	PASS
15.207	. AC Power Line Conducted Emission	PASS
15.249(a)	. Radiated Spurious Emission	PASS

*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement, measurement uncertainty evaluation is not considered.



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Equipment	Searchlight
Model Name	30222
Operation Frequency Range	2.4GHz: 2400-2483.5MHz
Center Frequency Range	2.4GHz: 2405-2477MHz
Modulation Type	FSK
Data Rate	250kbps
Antenna Type	PCB Antenna
Antenna Gain	1.68dBi
Power supply	DC 12V

Note: For more details, please refer to the User's manual of the EUT.

2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)
*00	2405
*01	2445
*02	2477

Note: Channels remarked * are selected to perform test.



2.3 Test Mode and Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.10
- The complete test system included support units and EUT for RF test.
- An executive program, EUT was executed to transmit and receive data via Wireless is accessed through button operation.
- The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
Mode 1	FSK (250kbps) for DC12V from DC Power (AC 120V)
Mode 2	FSK (250kbps) for DC12V from DC Power (AC 240V)
caused "Test Mode 1 and CH00:2405" generated the worst case, it was reported as the final data.	
Radiation Emissions (Below 1GHz)	
Test Mode	Operating Description
Mode 1	FSK (250kbps)
caused "Test Mode 1 and CH00:2405" generated the worst case, it was reported as the final data.	
Radiation Emissions (1GHz ~ 25GHz)	
Test Mode	Operating Description
Mode 1	FSK (250kbps)
caused "Test Mode 1" generated the worst case, they were reported as the final data.	

(For Above 1GHz)

Below test Channel generated the worst case, they were reported as the final data.

Modulation Type	Channel	Frequency (MHz)	Bandedge		1GHz~3GHz		3GHz~18GHz		18GHz~25GHz	
			Ver PK/AV	Hor PK/AV	Ver PK/AV	Hor PK/AV	Ver PK/AV	Hor PK/AV	Ver PK/AV	Hor PK/AV
FSK (250kbps)	00	2405	V	V	V	V	V	V		
	01	2445	V	V	V	V	V	V		
	02	2477	V	V	V	V	V	V	V	V



2.4 Description of Test System

Radiated Emissions					
Equipment	Brand	Model	Serial No	Length/Type	Power cord/Length/Type
DC Power Supply	Gwinstek	GPR-360600	GEV911339	N/A	N/A
AC Power Line Conducted Emission					
Equipment	Brand	Model	Serial No	Length/Type	Power cord/Length/Type
DC Power Supply	Gwinstek	GPR-360600	GEV911339	N/A	N/A

**2.5 General Information of Test**

Organization	CerpPASS Technology Corp.		
☒ Test Site	CerpPASS Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel: +886-3-3226-888 Fax: +886-3-3226-881		
	FCC	TW1439, TW1079	
	ISED Company Number	4934E	
	ISED CAB identifier	TW1439	
Frequency Range Investigated	Conducted: from 150kHz to 30 MHz Radiation: from 9 kHz to 40,000MHz		
Test Distance	The test distance of radiated emission from antenna to EUT is 3 M.		

Test Item	Test Site	Test period	Environmental Conditions	Tested By
Radiated Emissions	3M03-NK	2026/06/08~2026/06/12	23.2~25.1°C / 49~66%	Leon Huang
AC Power Line Conducted Emission	CON02-NK	2026/06/12	23°C / 66%	Leon Huang



2.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

Measurement Item	Uncertainty
AC Power Line Conduction(150kHz~30MHz)	$\pm 3.2\text{dB}$
Radiated Spurious Emission(9kHz~30MHz)	$\pm 3.4\text{dB}$
Radiated Spurious Emission(30MHz~1GHz)	$\pm 5.2\text{dB}$
Radiated Spurious Emission(1GHz~25GHz)	$\pm 5.2\text{dB}$
Conducted Spurious Emission	$\pm 2.1\text{dB}$
6dB Bandwidth	$\pm 4.4\%$
20dB Bandwidth	$\pm 4.5\%$
Occupied Bandwidth	$\pm 4.4\%$
Peak Output Power(Conducted Power Meter)	$\pm 1.1\text{dB}$
Dwell Time	$\pm 3.5\%$
Power Spectral Density	$\pm 2.0\text{dB}$
Duty Cycle	$\pm 3.5\%$



3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M03-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Sunol	JB1	A020514-1	2025/09/08	2026/09/07
Active Loop Antenna	Schwarzbeck	FMZB 1513	00414	2026/02/04	2027/02/03
Horn Antenna	EMCO	3116	31974	2025/10/07	2026/10/06
Horn Antenna	EMCO	3115	00031589	2026/03/11	2027/03/10
Spectrum Analyzer 44GHz	ROHDE & SCHWARZ	FSV3044	101744	2026/04/01	2027/03/31
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2025/07/10	2026/07/09
EXA Signal Analyzer	KEYSIGHT	N9010A	MY54200207	2026/04/01	2027/03/30
Preamplifier	Agilent	EMC0518A45SE	981069	2025/12/18	2026/12/17
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2025/10/13	2026/10/12
Preamplifier	EM Electronics corp.	EM330	060611	2026/03/17	2027/03/16
Cable-4m(9k-3G)	EMEC	RG-223	18274M	2025/07/02	2026/07/01
Cable-0.5m(1G-18G)	HUBER SUHNER	SUCOFLEX 104	805443/4	2026/03/09	2027/03/08
Cable-3m(1G-18G)	HUBER SUHNER	SUCOFLEX 104	805796/4	2026/03/09	2027/03/08
Cable-3m(10M-40G)	HUBER SUHNER	SF102	804619/2	2025/10/13	2026/10/12
Cable-1m(10M-40G)	HUBER SUHNER	SF102	804398/2	2025/10/13	2026/10/12
Cable-8m(1G-26.5G)	WOKEN	WCBA-WCA203SM	CCE1374	2026/03/09	2027/03/08
Cable-4m(30M-1G)	HUBER SUHNER	RG-214	02953M	2025/07/11	2026/07/10
Cable-1m(30M-1G)	HUBER SUHNER	RG-214	05094M	2025/07/11	2026/07/10
Cable-9m(30M-1G)	HUBER SUHNER	RG-214	00402M	2025/07/11	2026/07/10
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA
High Pass Filter	Warison	WFIL-H3000-18000F-03	WR377WC2B1	2025/10/15	2026/10/14
Highpass Filter	WOKEN	WFIL-H7000-18000F-01	WR377WC2B2	2025/10/15	2026/10/14

Test Item	AC Power Line Conducted Emission				
Test Site	CON02-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2025/07/10	2026/07/09
Two-Line V-Network	ROHDE & SCHWARZ	ENV216	102185	2025/08/28	2026/08/27
Two-Line V-Network	ROHDE & SCHWARZ	ENV216	101584	2026/01/15	2027/01/14
Cable-4m(9k-3G)	EMEC	RG-223	18274M	2025/07/02	2026/07/01
E3	AUDIX	v8.2014-8-6	RK-000536	NA	NA



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

4.2 Antenna Construction and Directional Gain

Antenna Type	PCB Antenna
Antenna Gain	1.68dBi



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.10-2020+Cor.1-2023 and ANSI C63.10a-2024. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




5.3 Typical Test Setup

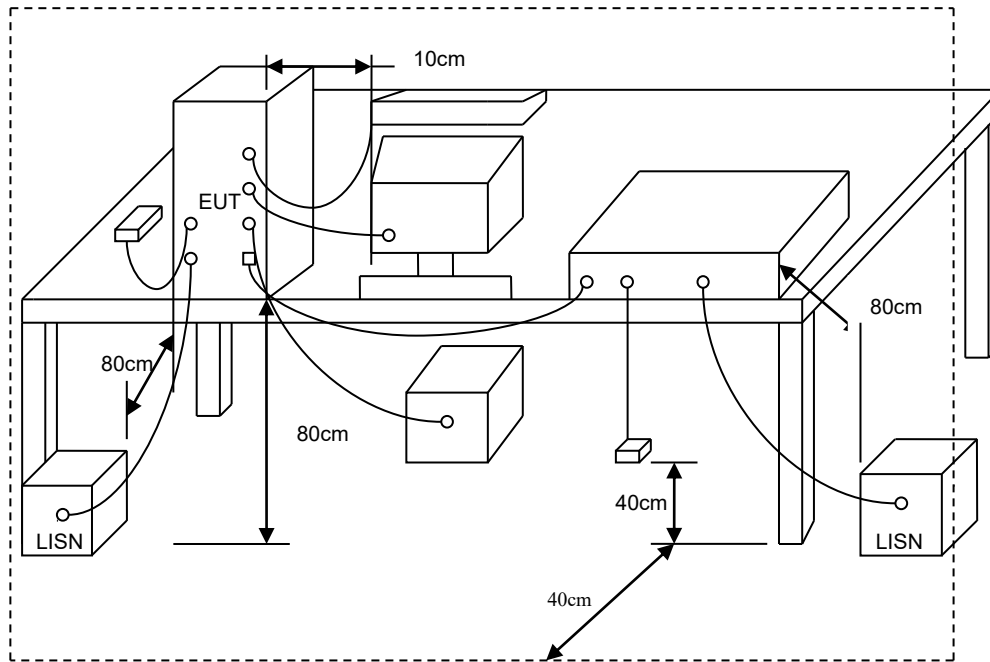



5.4 Test Result and Data

Power	:	AC120V / 60Hz	Pol/Phase	:	LINE
Test Mode	:	Mode 1		:	

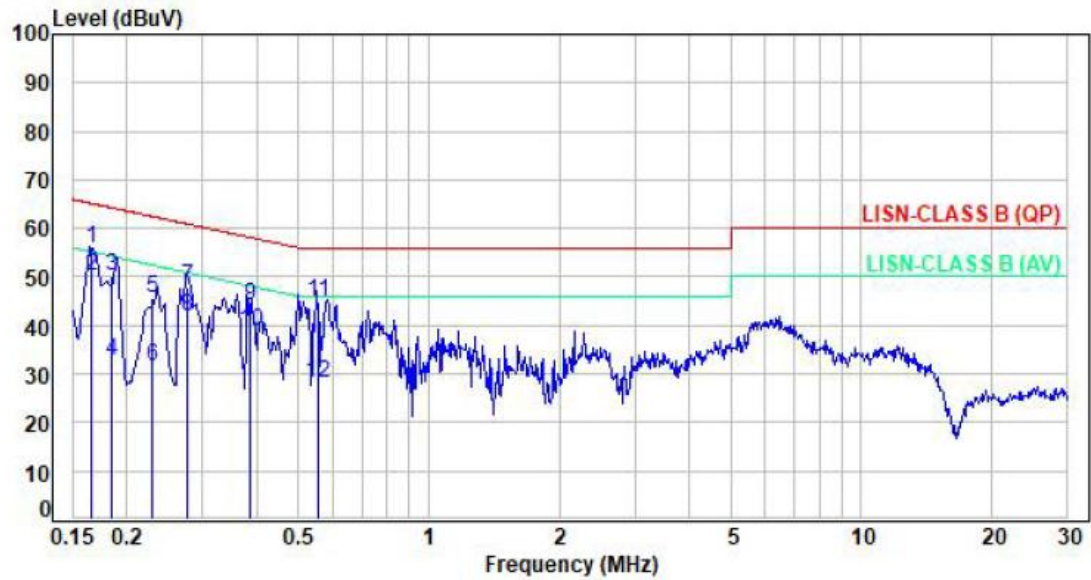

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Detector	P/F
1	0.1654	9.78	46.22	56.00	65.19	-9.19	QP	P
2	0.1654	9.78	40.49	50.27	55.19	-4.92	Average	P
3	0.1850	9.79	40.44	50.23	64.26	-14.03	QP	P
4	0.1850	9.79	22.79	32.58	54.26	-21.68	Average	P
5	0.2284	9.79	35.98	45.77	62.51	-16.74	QP	P
6	0.2284	9.79	21.68	31.47	52.51	-21.04	Average	P
7	0.2765	9.79	38.01	47.80	60.92	-13.12	QP	P
8	0.2765	9.79	32.05	41.84	50.92	-9.08	Average	P
9	0.3849	9.79	34.47	44.26	58.17	-13.91	QP	P
10	0.3849	9.79	28.82	38.61	48.17	-9.56	Average	P
11	0.5526	9.79	35.00	44.79	56.00	-11.21	QP	P
12	0.5526	9.79	18.28	28.07	46.00	-17.93	Average	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power	: AC120V / 60Hz	Pol/Phase	: NEUTRAL
Test Mode	: Mode 1		:

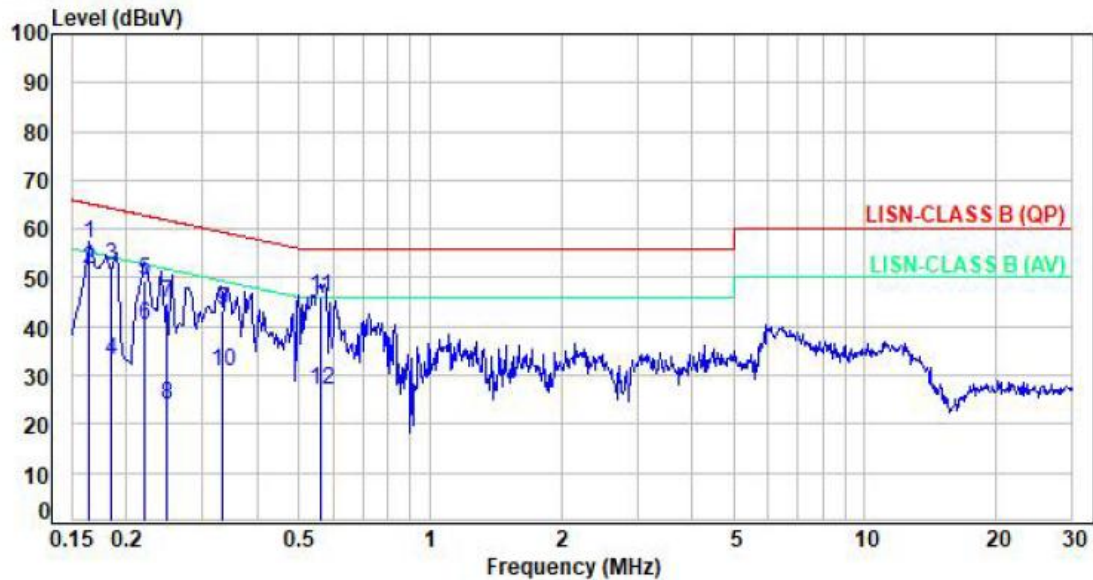

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1650	9.79	47.38	57.17	65.21	-8.04	QP	P
2	0.1650	9.79	41.80	51.59	55.21	-3.62	Average	P
3	0.1853	9.80	42.63	52.43	64.25	-11.82	QP	P
4	0.1853	9.80	23.28	33.08	54.25	-21.17	Average	P
5	0.2201	9.80	39.44	49.24	62.81	-13.57	QP	P
6	0.2201	9.80	30.38	40.18	52.81	-12.63	Average	P
7	0.2487	9.80	35.19	44.99	61.80	-16.81	QP	P
8	0.2487	9.80	14.05	23.85	51.80	-27.95	Average	P
9	0.3342	9.79	33.62	43.41	59.35	-15.94	QP	P
10	0.3342	9.79	21.08	30.87	49.35	-18.48	Average	P
11	0.5603	9.80	36.18	45.98	56.00	-10.02	QP	P
12	0.5603	9.80	17.04	26.84	46.00	-19.16	Average	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



6. Test of Spurious Emission (Radiated)

6.1 Test Limit

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)	Measurement Distance (meters)
902-928 MHz	50	500	3
2400-2483.5 MHz	50	500	3
5725-5875 MHz	50	500	3
24.0-24.25 GHz	250	2500	3

6.2 Test Procedures


- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.

Note: The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.
(X-AXIS is the worst.)




6.3 Typical Test Setup


Below 30MHz test setup

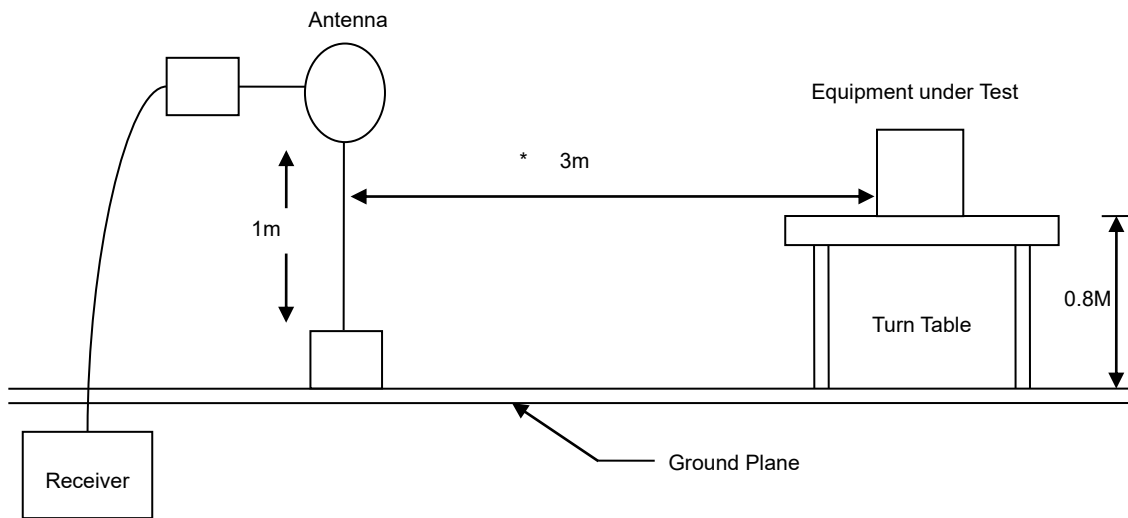

30MHz- 1GHz Test Setup

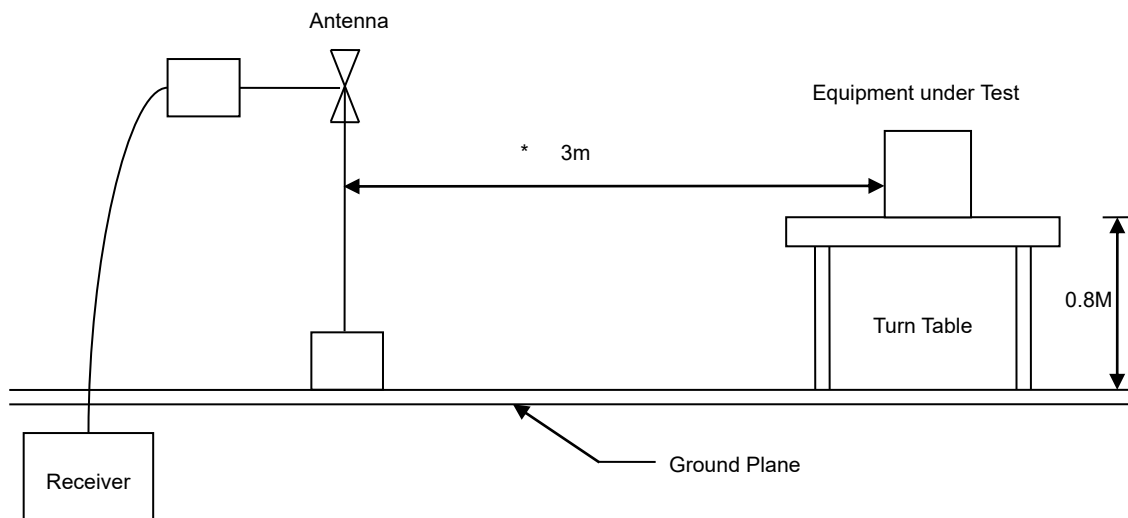


Above 1GHz Test Setup

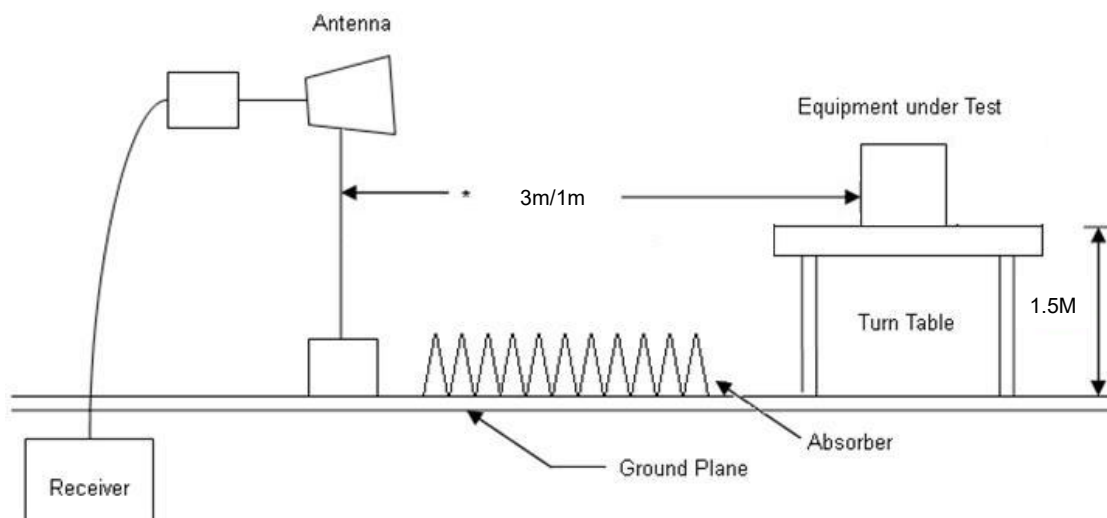



6.4 Test Result and Data (Fundamental Emission+ Bandedge)

Power	: AC120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH00	Detector	: Peak

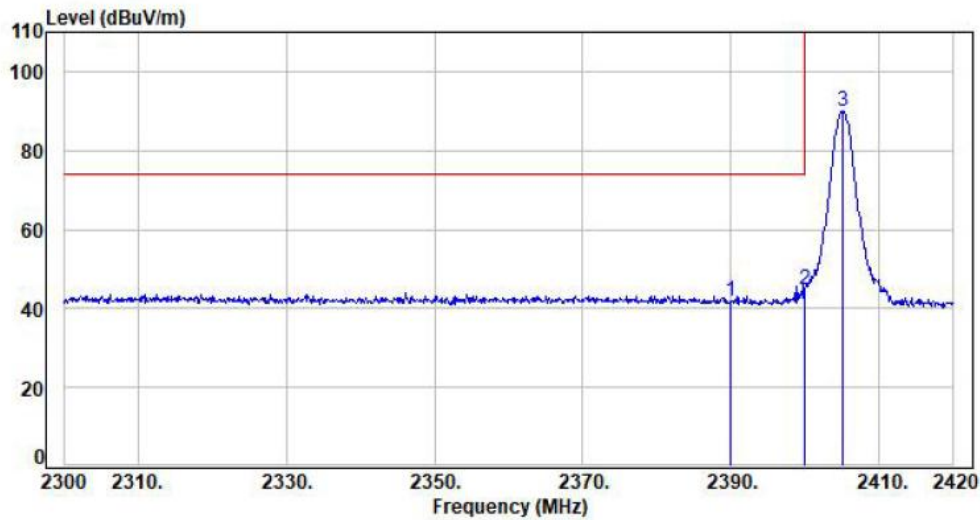


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.88	45.66	41.78	74.00	-32.22	Peak	100	157	P
2	2400.00	-3.96	48.78	44.82	74.00	-29.18	Peak	100	249	P
3	2405.00	-3.90	93.73	89.83	114.00	-24.17	Peak	100	188	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH00	Detector	: Average

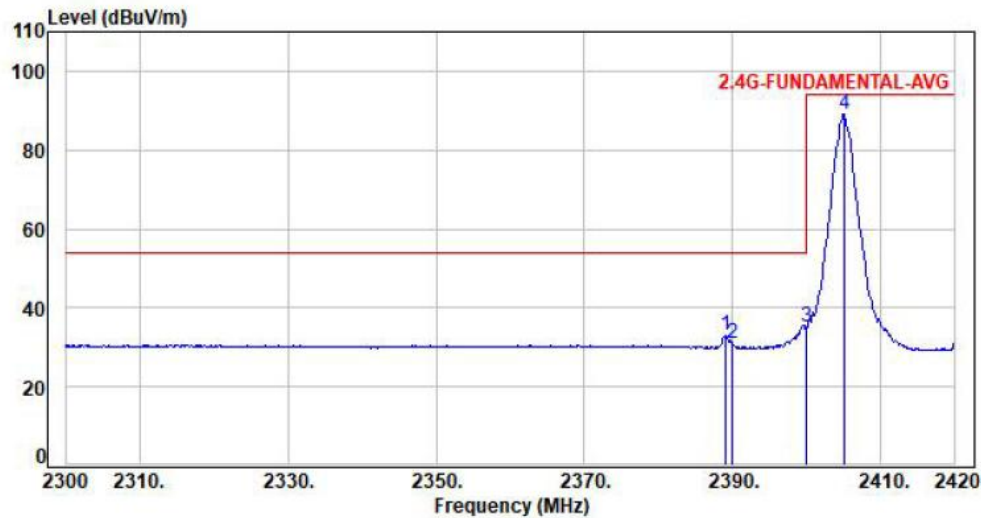

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2389.04	-3.88	36.82	32.94	54.00	-21.06	Average	100	115	P
2	2390.00	-3.88	34.73	30.85	54.00	-23.15	Average	100	179	P
3	2400.00	-3.96	39.19	35.23	54.00	-18.77	Average	100	224	P
4	2405.00	-3.90	93.04	89.14	94.00	-4.86	Average	100	105	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH00	Detector	: Peak

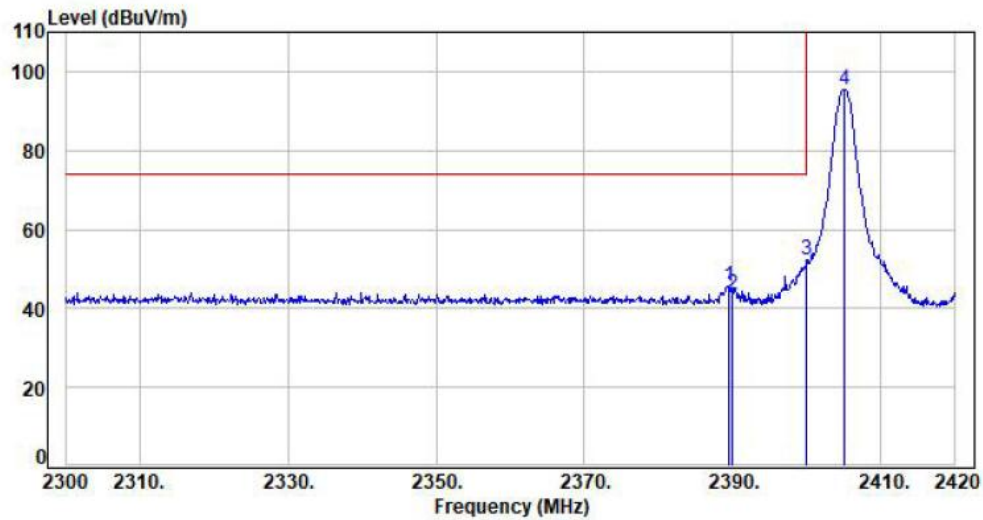

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2389.52	-3.88	49.49	45.61	74.00	-28.39	Peak	100	140	P
2	2390.00	-3.88	47.57	43.69	74.00	-30.31	Peak	100	106	P
3	2400.00	-3.96	56.08	52.12	74.00	-21.88	Peak	100	187	P
4	2405.00	-3.90	99.31	95.41	114.00	-18.59	Peak	100	44	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH00	Detector	: Average

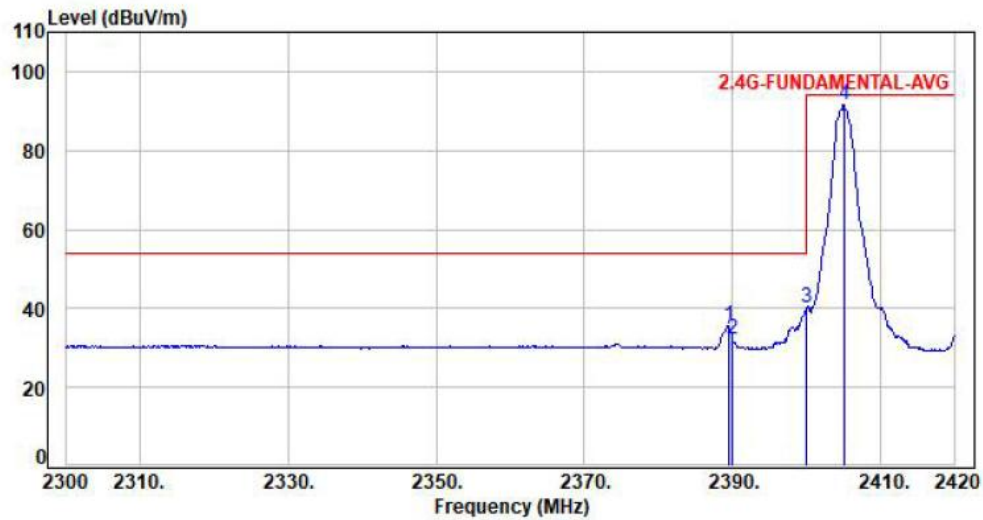

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2389.40	-3.88	39.41	35.53	54.00	-18.47	Average	100	181	P
2	2390.00	-3.88	35.93	32.05	54.00	-21.95	Average	100	294	P
3	2400.00	-3.96	43.98	40.02	54.00	-13.98	Average	100	162	P
4	2405.00	-3.90	95.58	91.68	94.00	-2.32	Average	100	325	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH01	Detector	: Peak

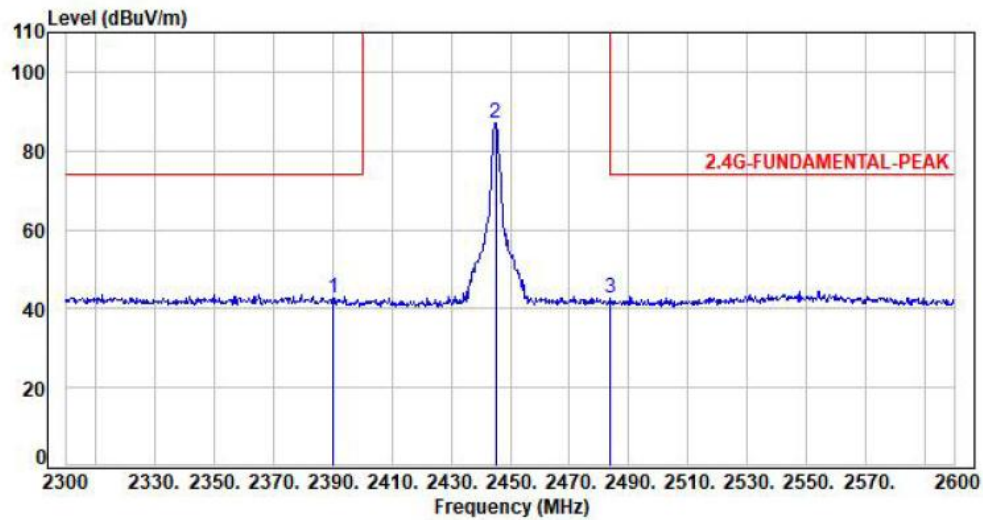


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.88	46.50	42.62	74.00	-31.38	Peak	100	115	P
2	2445.00	-3.77	90.75	86.98	114.00	-27.02	Peak	100	108	P
3	2483.50	-3.57	46.35	42.78	74.00	-31.22	Peak	100	77	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH01	Detector	: Average

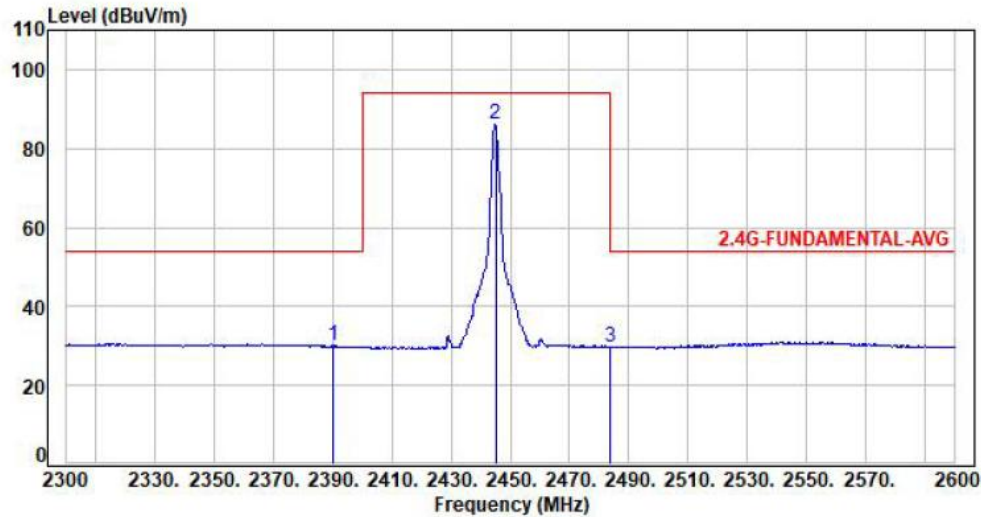


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.88	33.82	29.94	54.00	-24.06	Average	100	90	P
2	2445.00	-3.77	90.09	86.32	94.00	-7.68	Average	100	160	P
3	2483.50	-3.57	33.23	29.66	54.00	-24.34	Average	100	244	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH01	Detector	: Peak

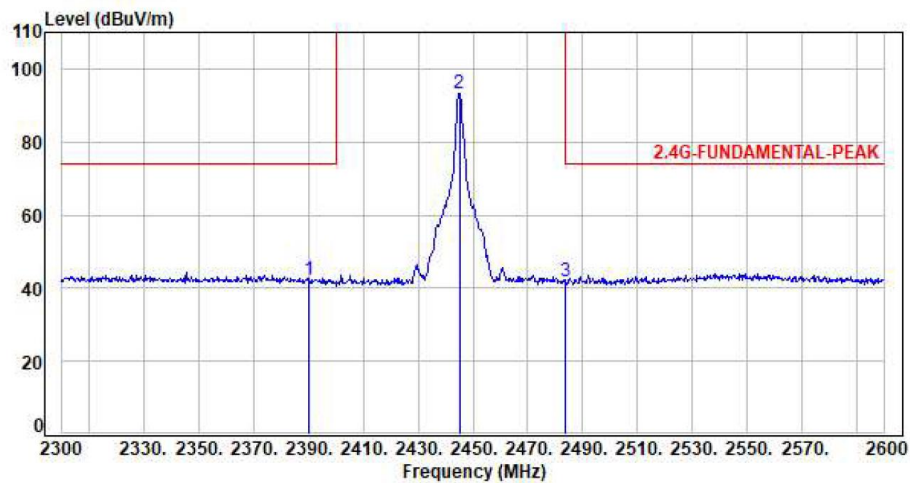


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.88	46.30	42.42	74.00	-31.58	Peak	100	53	P
2	2445.00	-3.77	96.94	93.17	114.00	-20.83	Peak	100	104	P
3	2483.50	-3.57	45.37	41.80	74.00	-32.20	Peak	100	142	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH01	Detector	: Average

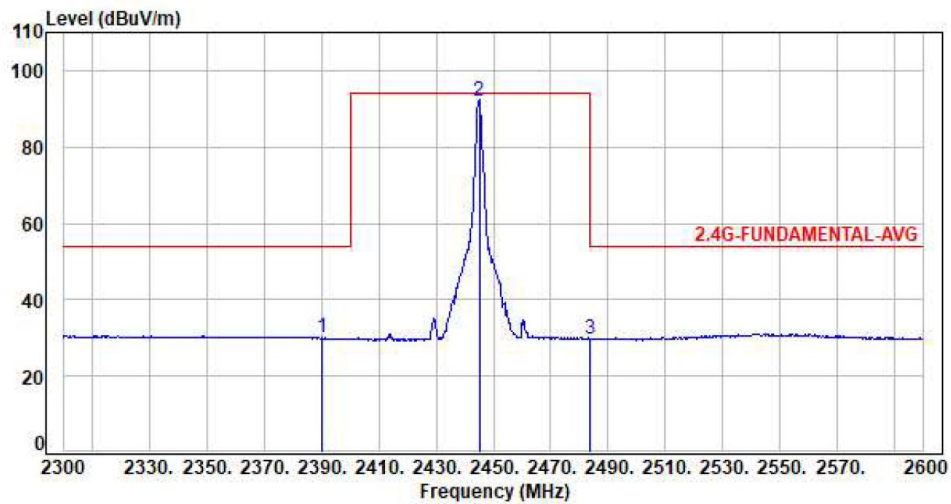

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-3.88	33.81	29.93	54.00	-24.07	Average	100	62	P
2	2445.00	-3.77	95.69	91.92	94.00	-2.08	Average	100	150	P
3	2483.50	-3.57	33.37	29.80	54.00	-24.20	Average	100	217	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH02	Detector	: Peak

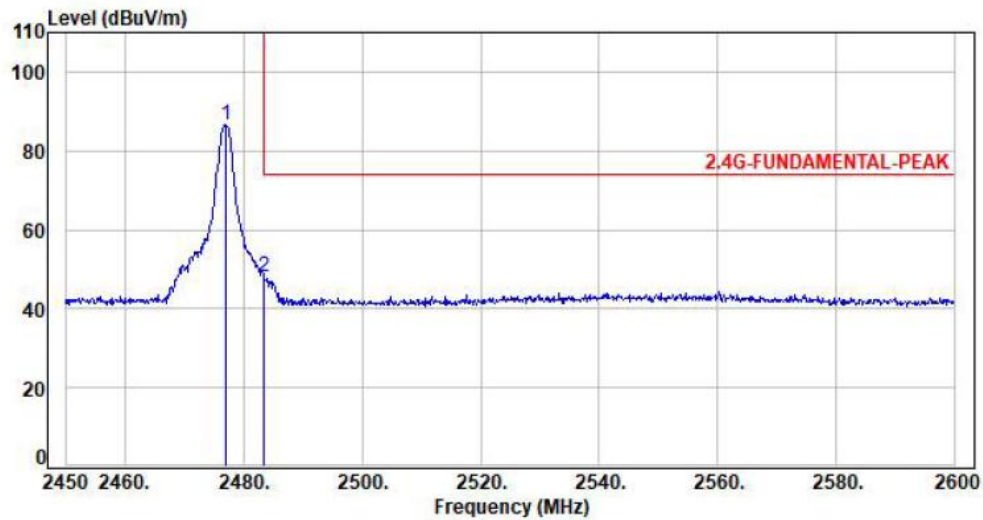


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2477.00	-3.55	90.03	86.48	114.00	-27.52	Peak	100	157	P
2	2483.50	-3.57	51.53	47.96	74.00	-26.04	Peak	100	3	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH02	Detector	: Average

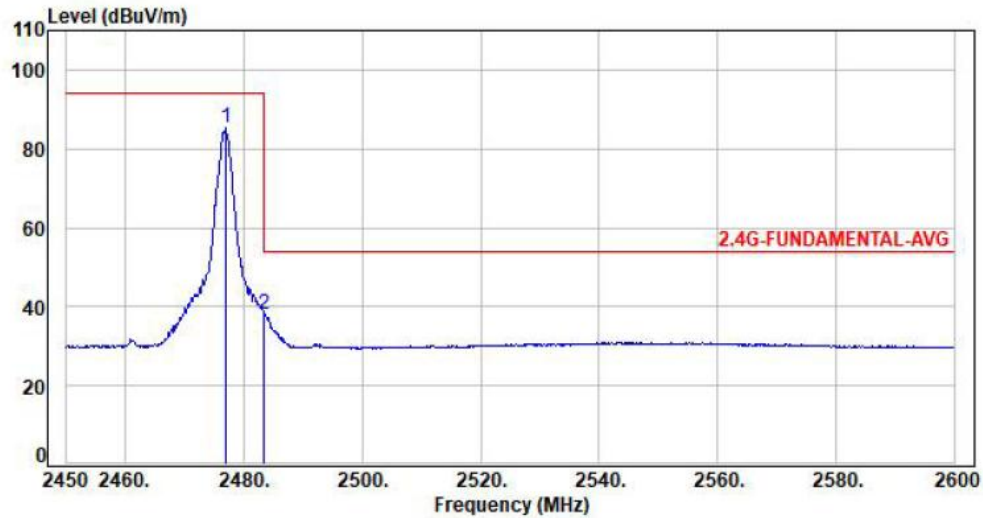


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2477.00	-3.55	88.70	85.15	94.00	-8.85	Average	100	116	P
2	2483.50	-3.57	41.63	38.06	54.00	-15.94	Average	100	179	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH02	Detector	: Peak

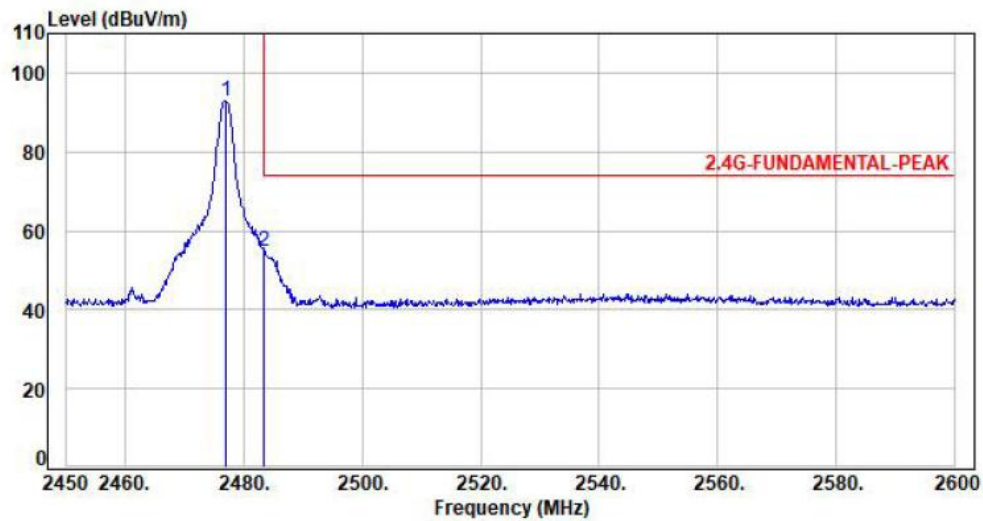


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2477.00	-3.55	96.44	92.89	114.00	-21.11	Peak	100	75	P
2	2483.50	-3.57	58.52	54.95	74.00	-19.05	Peak	100	287	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH02	Detector	: Average

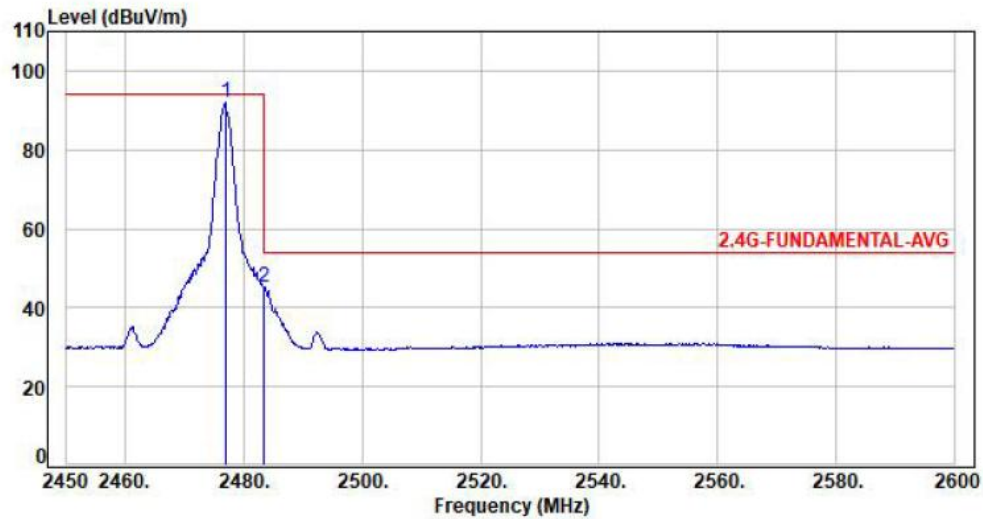

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2477.00	-3.55	95.55	92.00	94.00	-2.00	Average	100	93	P
2	2483.50	-3.57	48.85	45.28	54.00	-8.72	Average	100	67	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




6.5 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

6.6 Test Result and Data (30MHz ~ 1GHz)

Power	:	AC120V / 60Hz	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1		:	

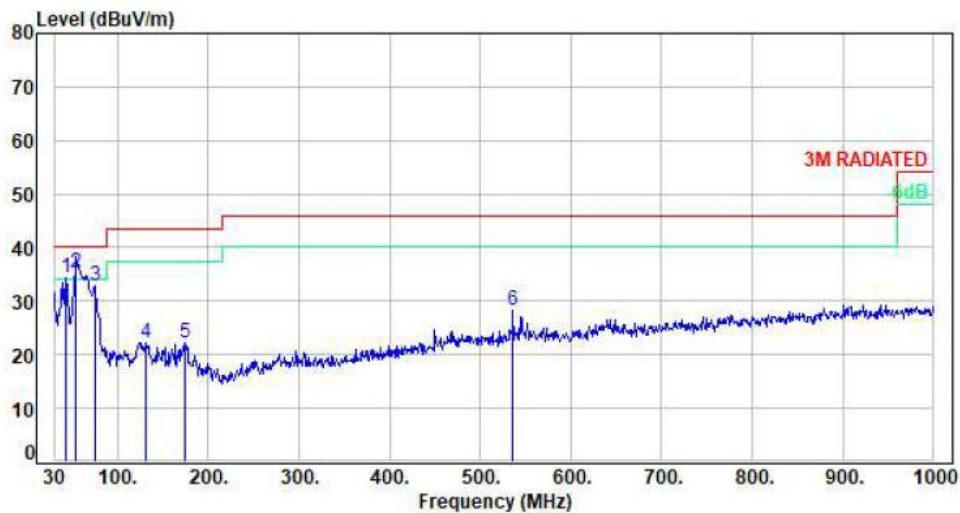

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	43.58	-12.62	47.14	34.52	40.00	-5.48	QP	100	94	P
2	54.25	-16.08	51.48	35.40	40.00	-4.60	QP	100	84	P
3	74.62	-14.95	47.67	32.72	40.00	-7.28	Peak	100	337	P
4	131.85	-8.43	30.76	22.33	43.50	-21.17	Peak	100	46	P
5	174.53	-10.64	32.98	22.34	43.50	-21.16	Peak	100	352	P
6	536.34	-2.96	31.12	28.16	46.00	-17.84	Peak	100	210	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1		:

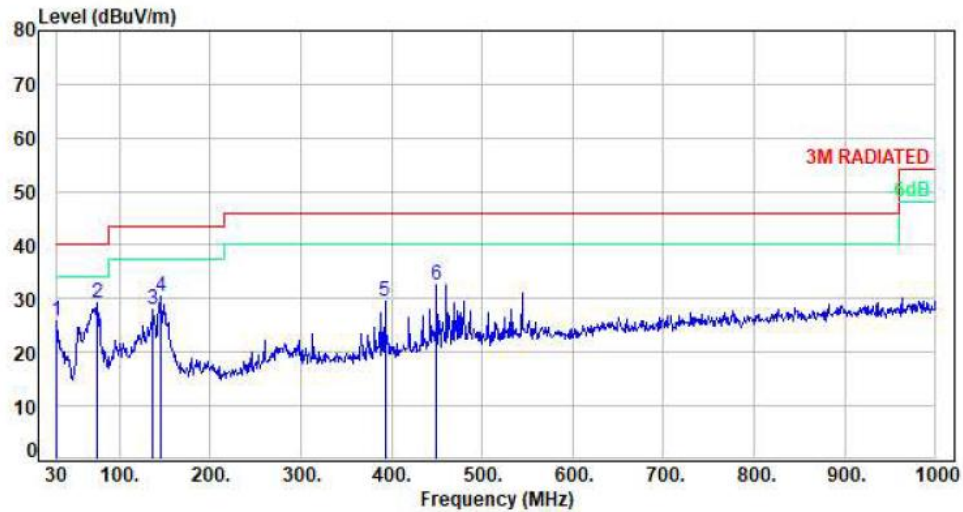

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	30.00	-2.95	28.72	25.77	40.00	-14.23	Peak	100	174	P
2	75.59	-14.95	44.07	29.12	40.00	-10.88	Peak	100	334	P
3	136.70	-8.79	36.67	27.88	43.50	-15.62	Peak	100	324	P
4	145.43	-9.34	39.64	30.30	43.50	-13.20	Peak	100	312	P
5	392.78	-6.11	35.54	29.43	46.00	-16.57	Peak	100	210	P
6	450.01	-4.32	37.01	32.69	46.00	-13.31	Peak	100	32	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.7 Test Result and Data (1GHz ~ 3GHz)

Power	:	AC120V / 60Hz	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH00		:	

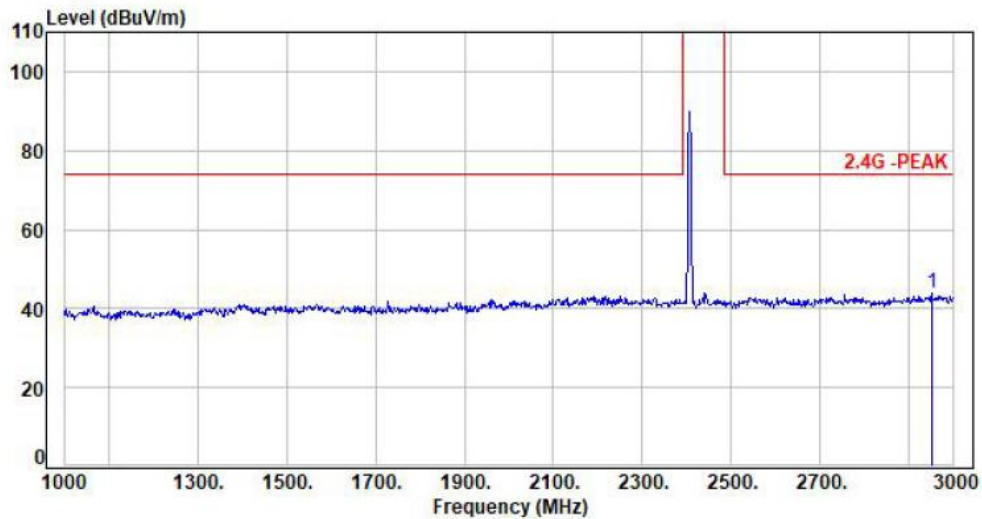

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2950.00	-1.82	45.87	44.05	74.00	-29.95	Peak	100	317	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH00		:

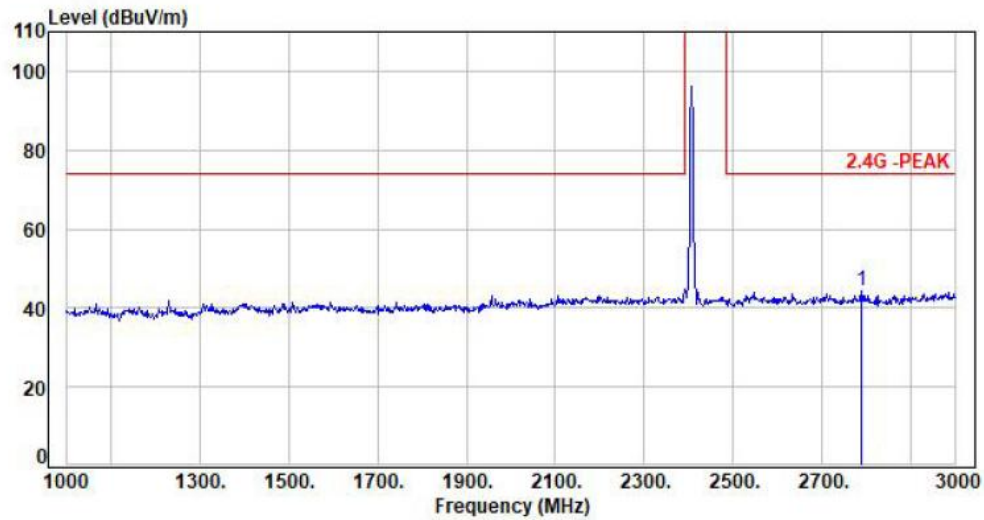


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2788.00	-2.90	47.17	44.27	74.00	-29.73	Peak	100	70	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH01		:

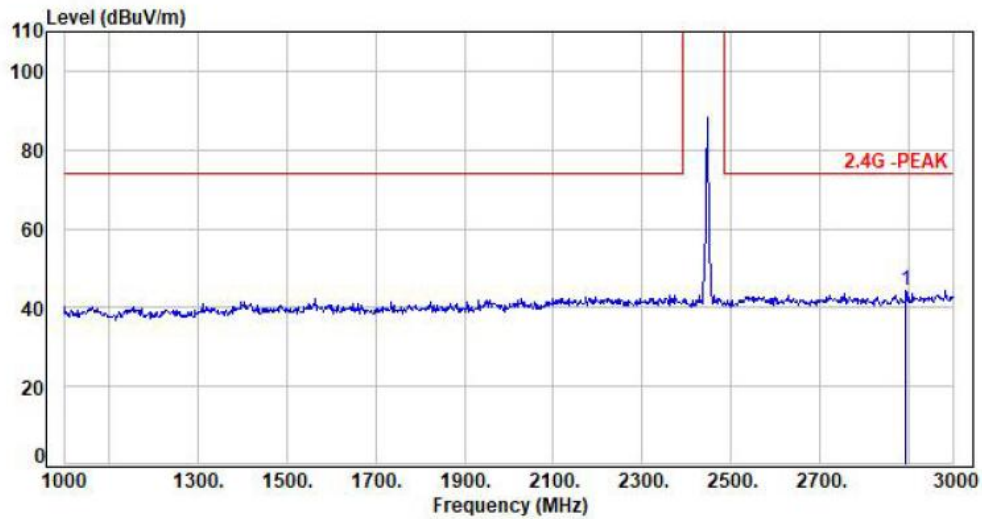


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2892.00	-2.18	46.45	44.27	74.00	-29.73	Peak	100	191	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH01		:

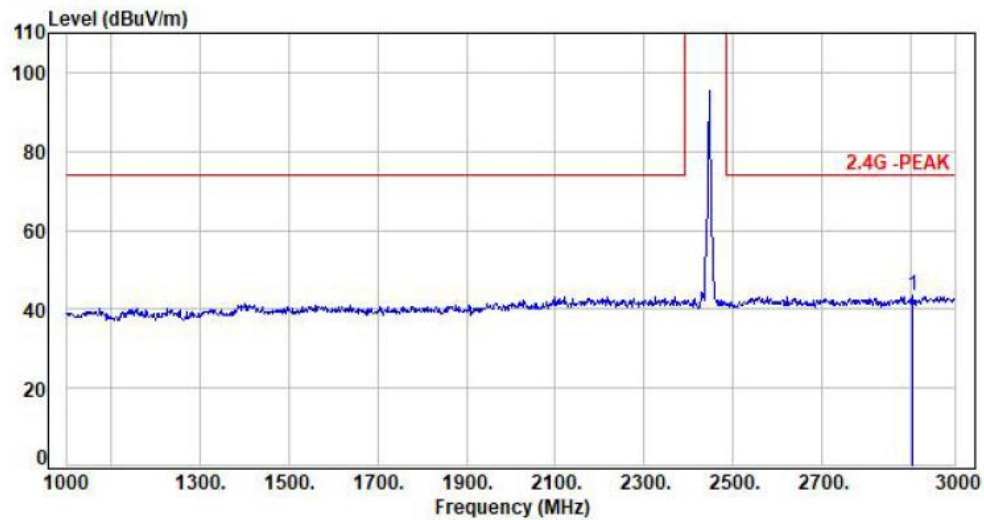


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2902.00	-2.17	45.75	43.58	74.00	-30.42	Peak	100	189	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH02		:

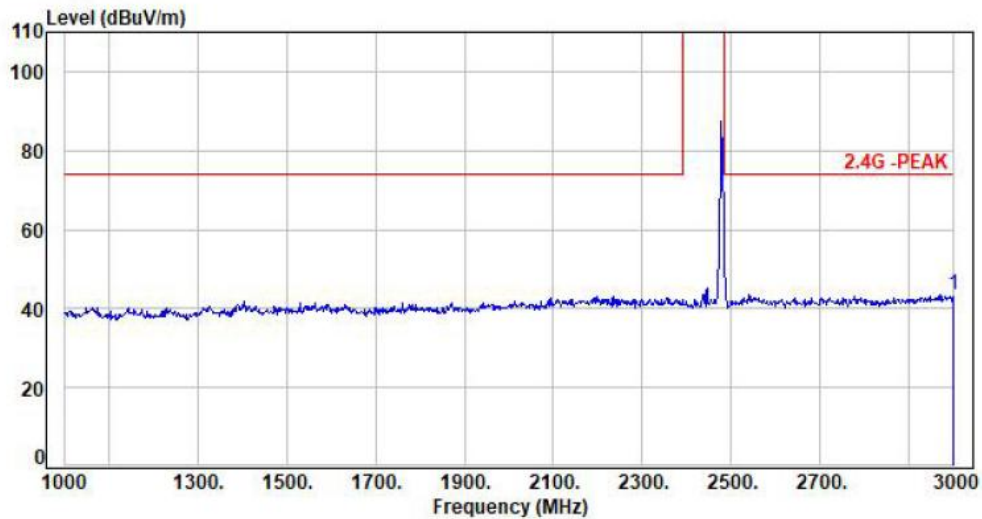


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	3000.00	-1.57	45.01	43.44	74.00	-30.56	Peak	100	284	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH02		:

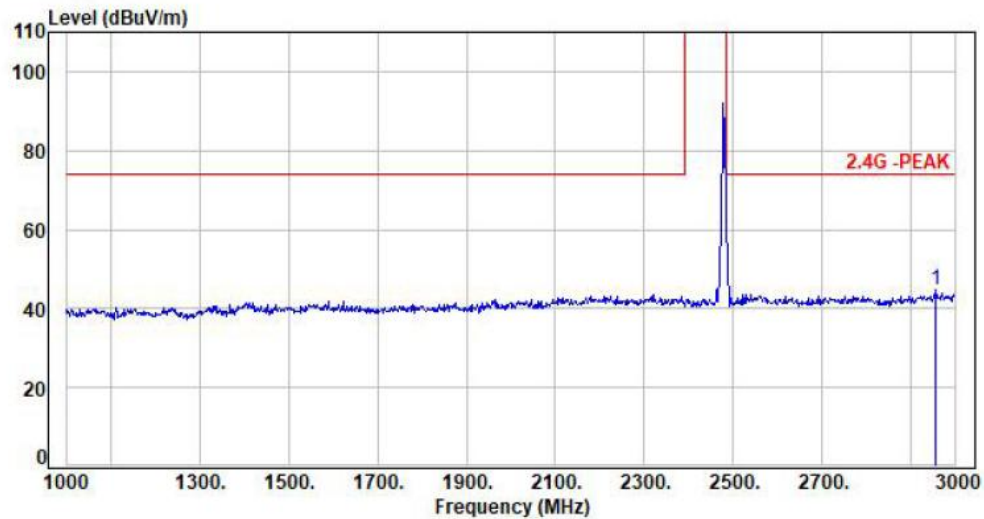


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2956.00	-1.75	46.34	44.59	74.00	-29.41	Peak	100	48	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



6.8 Test Result and Data (3GHz ~ 18GHz)

Power	: AC120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH00	Detector	: Peak

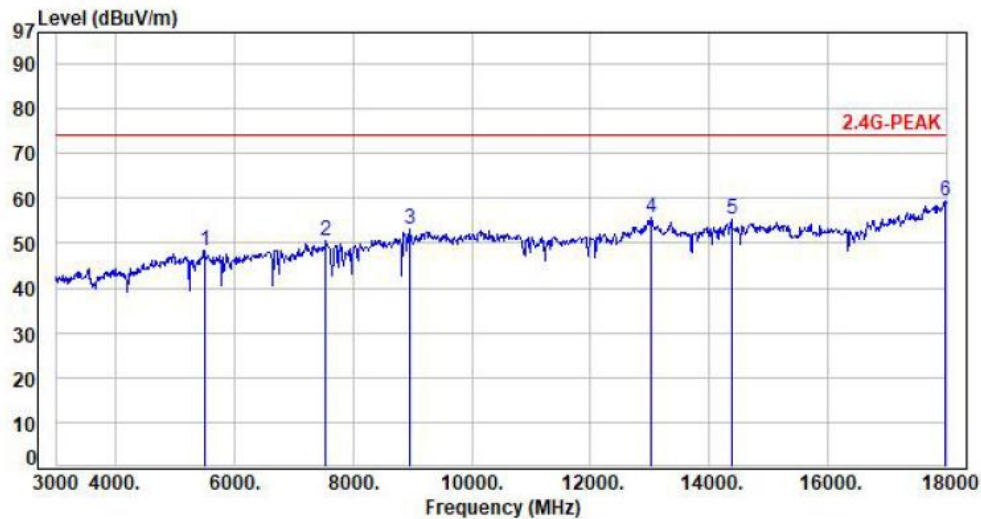


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5505.00	3.38	44.84	48.22	74.00	-25.78	Peak	100	162	P
2	7545.00	6.19	44.23	50.42	74.00	-23.58	Peak	100	49	P
3	8970.00	6.82	46.14	52.96	74.00	-21.04	Peak	100	290	P
4	13005.00	7.65	47.91	55.56	74.00	-18.44	Peak	100	105	P
5	14370.00	9.95	45.33	55.28	74.00	-18.72	Peak	100	231	P
6	17970.00	14.71	44.72	59.43	74.00	-14.57	Peak	100	70	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH00	Detector	: Average

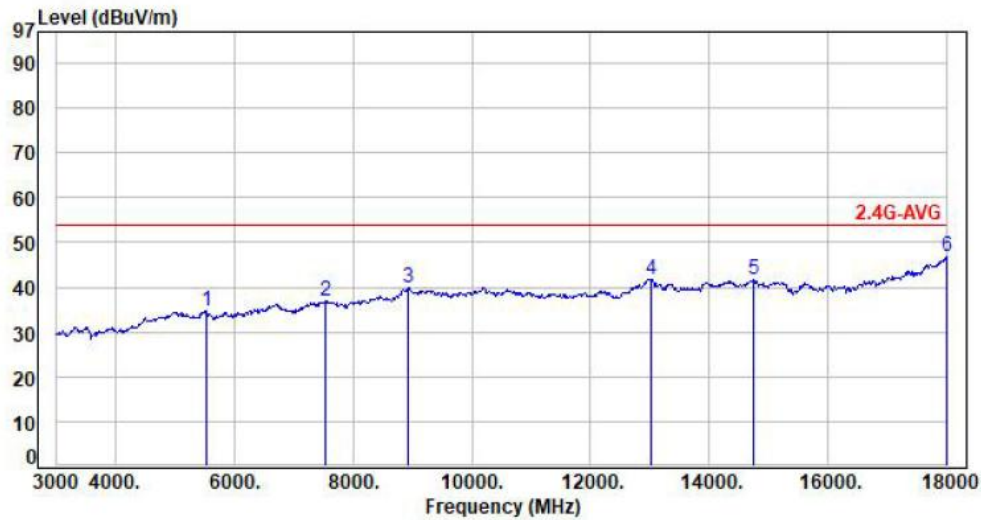


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5550.00	3.40	31.18	34.58	54.00	-19.42	Average	100	118	P
2	7530.00	6.22	30.72	36.94	54.00	-17.06	Average	100	274	P
3	8940.00	6.84	32.93	39.77	54.00	-14.23	Average	100	38	P
4	13020.00	7.69	34.05	41.74	54.00	-12.26	Average	100	155	P
5	14730.00	9.98	31.76	41.74	54.00	-12.26	Average	100	203	P
6	17985.00	14.73	32.15	46.88	54.00	-7.12	Average	100	270	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH00	Detector	: Peak

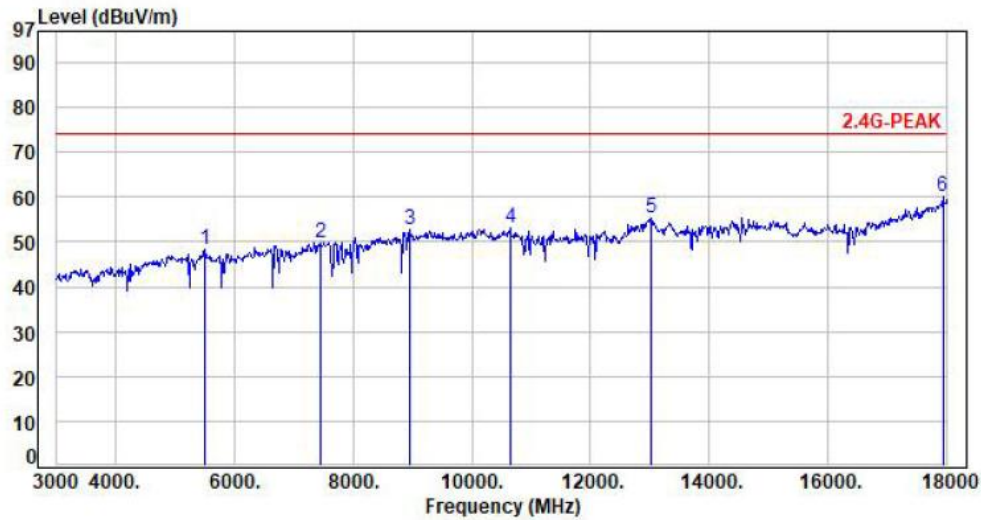


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5505.00	3.38	44.80	48.18	74.00	-25.82	Peak	100	166	P
2	7455.00	6.37	43.51	49.88	74.00	-24.12	Peak	100	202	P
3	8970.00	6.82	45.84	52.66	74.00	-21.34	Peak	100	125	P
4	10650.00	5.97	47.19	53.16	74.00	-20.84	Peak	100	230	P
5	13020.00	7.69	47.51	55.20	74.00	-18.80	Peak	100	77	P
6	17925.00	14.61	45.47	60.08	74.00	-13.92	Peak	100	270	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH00	Detector	: Average

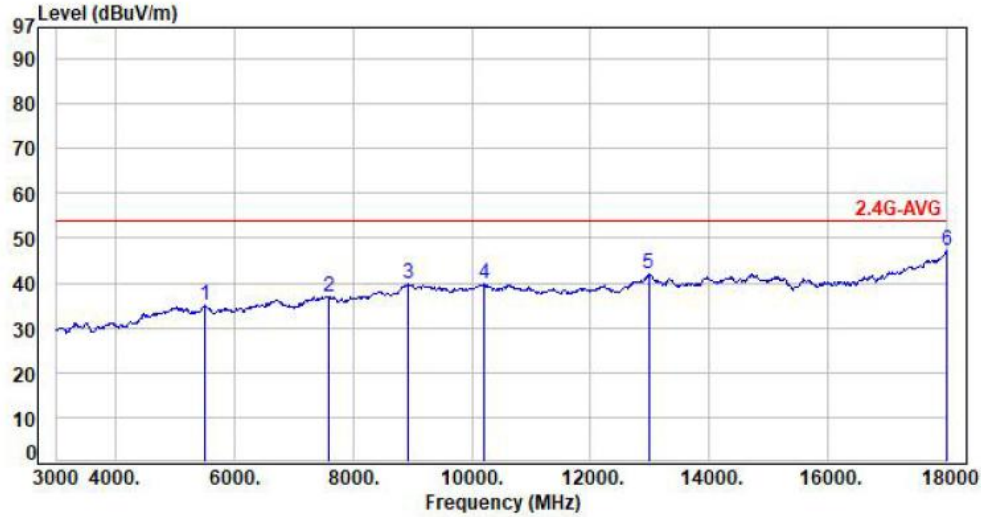


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5520.00	3.38	31.63	35.01	54.00	-18.99	Average	100	52	P
2	7605.00	6.16	30.78	36.94	54.00	-17.06	Average	100	317	P
3	8940.00	6.84	32.90	39.74	54.00	-14.26	Average	100	9	P
4	10200.00	6.05	33.70	39.75	54.00	-14.25	Average	100	235	P
5	12975.00	7.53	34.33	41.86	54.00	-12.14	Average	100	42	P
6	17985.00	14.73	32.33	47.06	54.00	-6.94	Average	100	123	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH01	Detector	: Peak

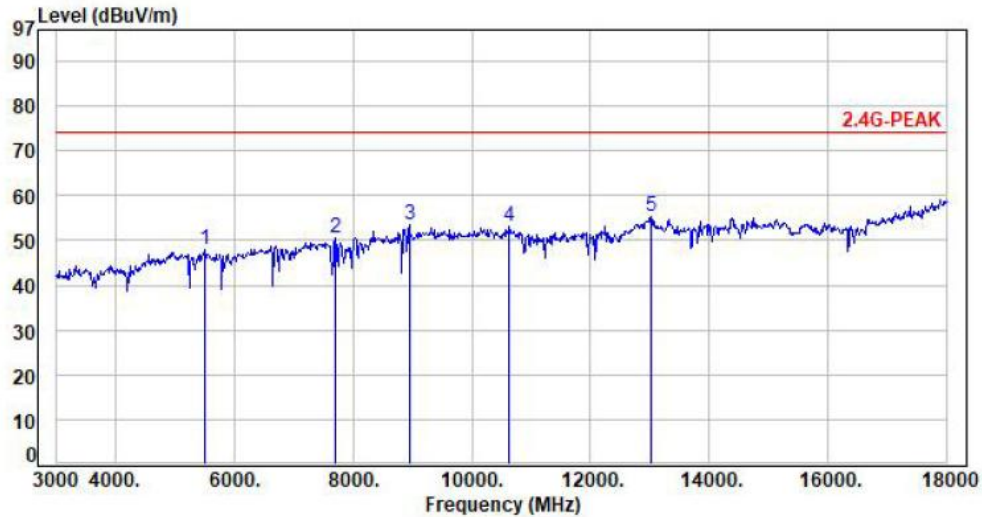


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5505.00	3.38	44.62	48.00	74.00	-26.00	Peak	100	87	P
2	7695.00	6.13	44.44	50.57	74.00	-23.43	Peak	100	178	P
3	8955.00	6.82	46.74	53.56	74.00	-20.44	Peak	100	116	P
4	10635.00	5.95	47.10	53.05	74.00	-20.95	Peak	100	229	P
5	13020.00	7.69	47.45	55.14	74.00	-18.86	Peak	100	51	P
6	18000.00	14.75	44.09	58.84	74.00	-15.16	Peak	100	232	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH01	Detector	: Average

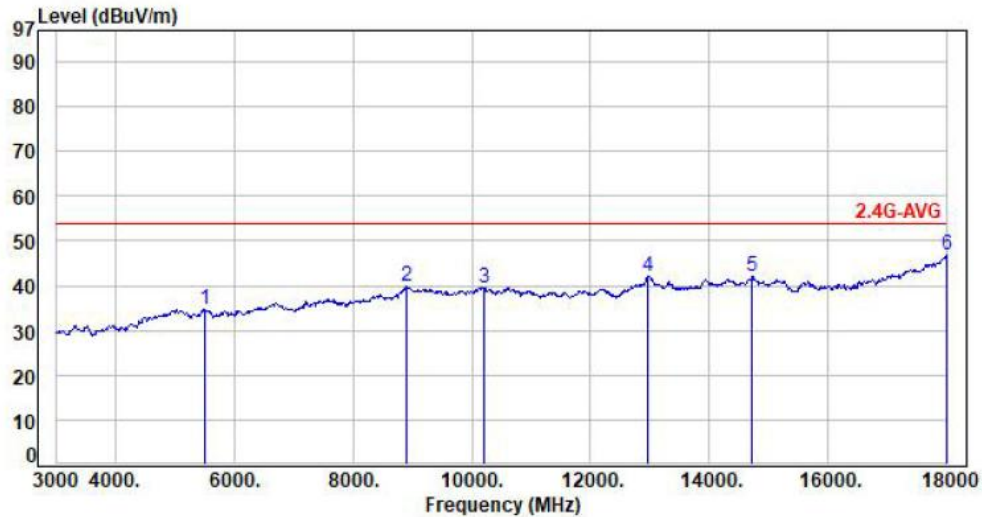

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5520.00	3.38	31.38	34.76	54.00	-19.24	Average	100	164	P
2	8895.00	6.87	32.82	39.69	54.00	-14.31	Average	100	177	P
3	10215.00	5.98	33.61	39.59	54.00	-14.41	Average	100	214	P
4	12960.00	7.45	34.50	41.95	54.00	-12.05	Average	100	18	P
5	14715.00	10.04	32.08	42.12	54.00	-11.88	Average	100	200	P
6	17985.00	14.73	32.04	46.77	54.00	-7.23	Average	100	22	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH01	Detector	: Peak

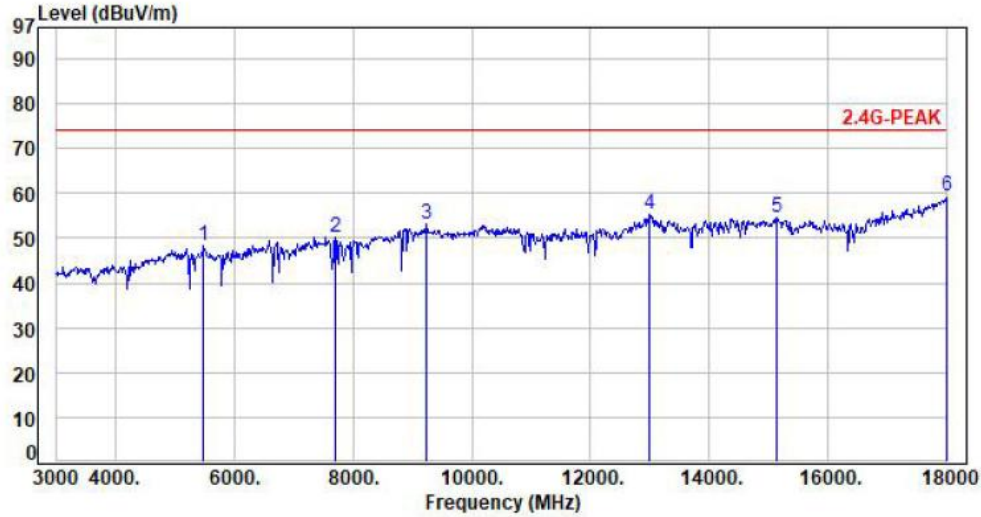


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5490.00	3.40	44.80	48.20	74.00	-25.80	Peak	100	117	P
2	7695.00	6.13	44.12	50.25	74.00	-23.75	Peak	100	48	P
3	9240.00	6.41	46.64	53.05	74.00	-20.95	Peak	100	63	P
4	12990.00	7.61	47.64	55.25	74.00	-18.75	Peak	100	239	P
5	15120.00	8.43	45.99	54.42	74.00	-19.58	Peak	100	170	P
6	17999.00	14.75	44.48	59.23	74.00	-14.77	Peak	100	199	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH01	Detector	: Average

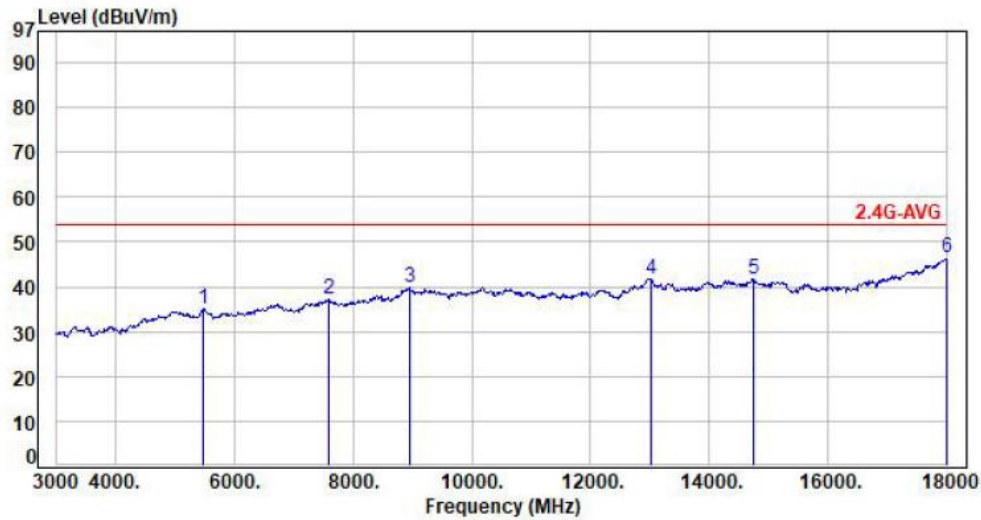


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5490.00	3.40	31.73	35.13	54.00	-18.87	Average	100	140	P
2	7590.00	6.16	31.01	37.17	54.00	-16.83	Average	100	292	P
3	8955.00	6.82	32.93	39.75	54.00	-14.25	Average	100	37	P
4	13005.00	7.65	34.06	41.71	54.00	-12.29	Average	100	157	P
5	14730.00	9.98	31.83	41.81	54.00	-12.19	Average	100	85	P
6	17998.00	14.75	31.81	46.56	54.00	-7.44	Average	100	13	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH02	Detector	: Peak

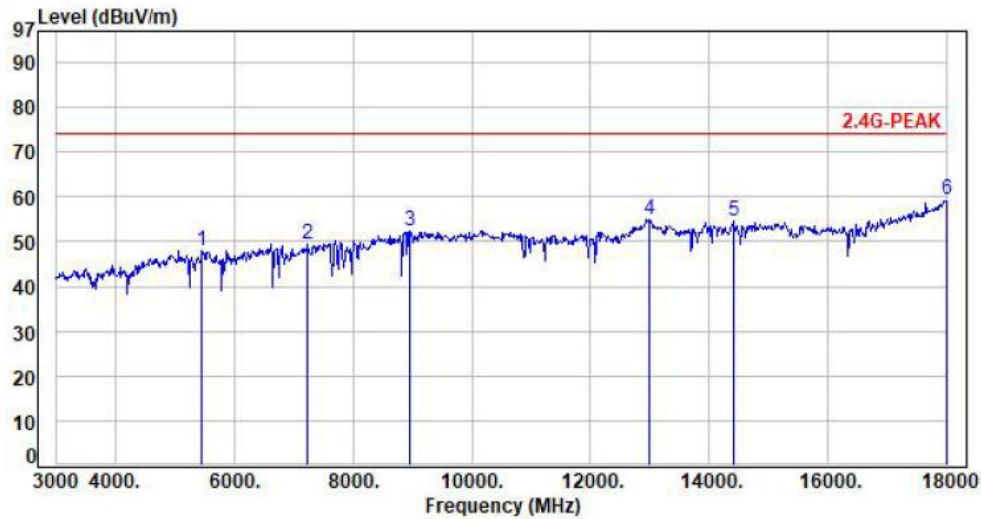


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	3.45	44.55	48.00	74.00	-26.00	Peak	100	153	P
2	7245.00	5.83	43.53	49.36	74.00	-24.64	Peak	100	245	P
3	8970.00	6.82	45.52	52.34	74.00	-21.66	Peak	100	207	P
4	12990.00	7.61	47.39	55.00	74.00	-19.00	Peak	100	180	P
5	14400.00	10.01	44.70	54.71	74.00	-19.29	Peak	100	92	P
6	17999.00	14.75	44.53	59.28	74.00	-14.72	Peak	100	185	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH02	Detector	: Average

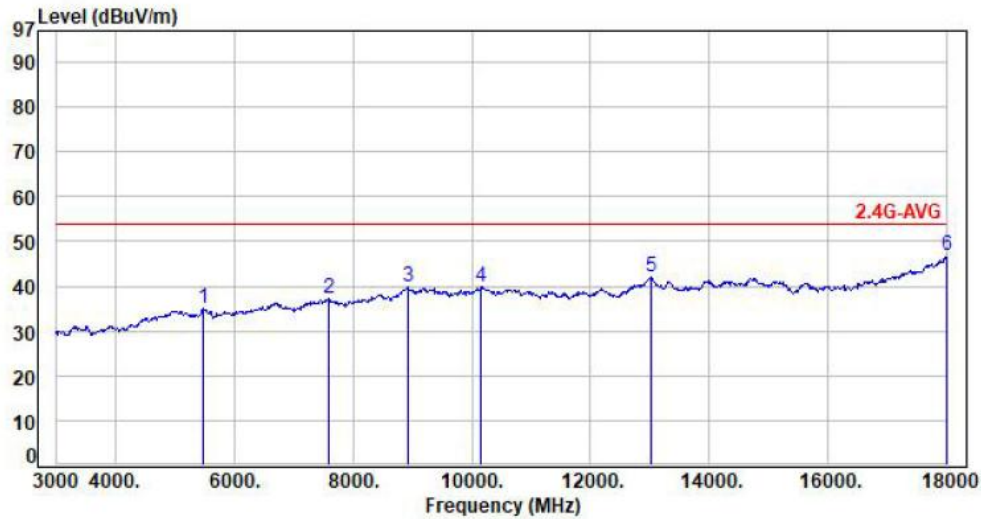


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5490.00	3.40	31.47	34.87	54.00	-19.13	Average	100	230	P
2	7605.00	6.16	30.98	37.14	54.00	-16.86	Average	100	179	P
3	8925.00	6.85	32.82	39.67	54.00	-14.33	Average	100	107	P
4	10155.00	6.08	33.63	39.71	54.00	-14.29	Average	100	44	P
5	13005.00	7.65	34.36	42.01	54.00	-11.99	Average	100	121	P
6	17995.00	14.75	32.16	46.91	54.00	-7.09	Average	100	25	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH02	Detector	: Peak

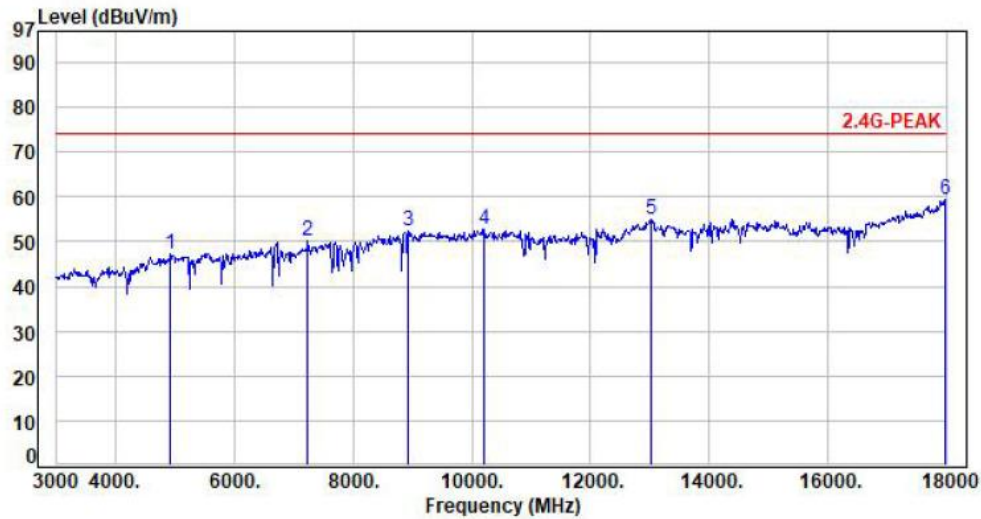


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	4935.00	2.56	44.69	47.25	74.00	-26.75	Peak	100	147	P
2	7245.00	5.83	44.32	50.15	74.00	-23.85	Peak	100	211	P
3	8940.00	6.84	45.53	52.37	74.00	-21.63	Peak	100	15	P
4	10215.00	5.98	46.71	52.69	74.00	-21.31	Peak	100	179	P
5	13005.00	7.65	47.37	55.02	74.00	-18.98	Peak	100	30	P
6	17955.00	14.69	44.81	59.50	74.00	-14.50	Peak	100	236	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH02	Detector	: Average

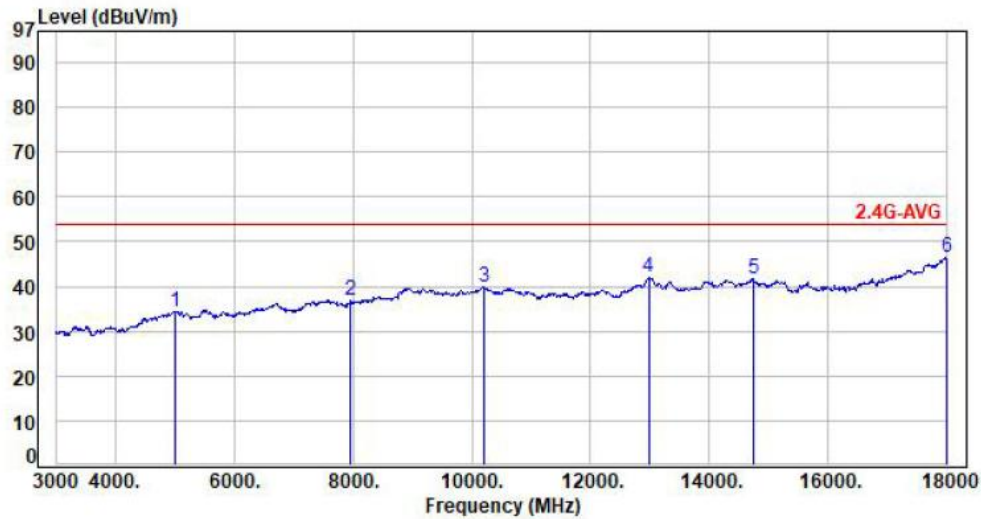

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5010.00	2.71	31.62	34.33	54.00	-19.67	Average	100	208	P
2	7965.00	6.40	30.49	36.89	54.00	-17.11	Average	100	196	P
3	10200.00	6.05	33.94	39.99	54.00	-14.01	Average	100	52	P
4	12975.00	7.53	34.36	41.89	54.00	-12.11	Average	100	141	P
5	14745.00	9.91	31.67	41.58	54.00	-12.42	Average	100	180	P
6	17999.00	14.75	31.66	46.41	54.00	-7.59	Average	100	32	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.9 Test Result and Data (18GHz ~ 25GHz)

Power	:	AC120V / 60Hz	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH02			

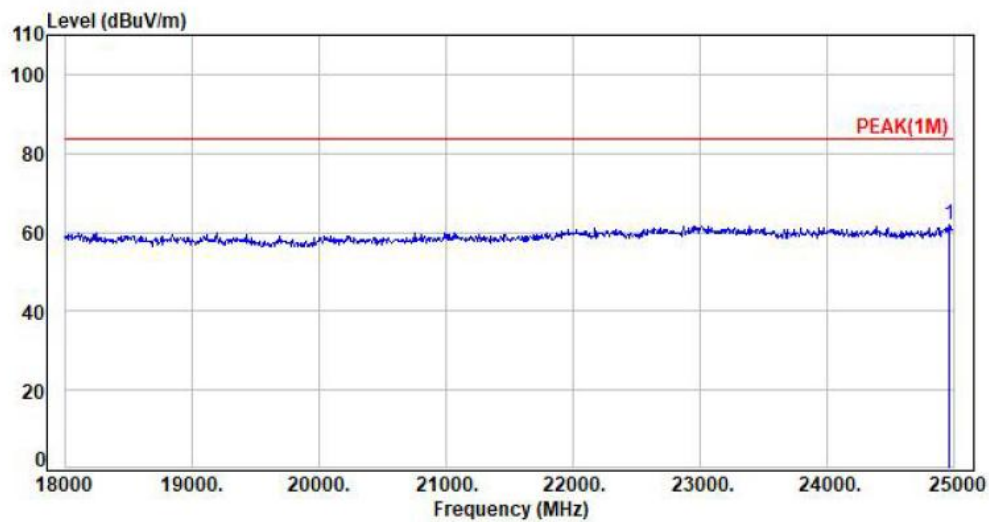

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	24958.00	9.97	51.75	61.72	83.54	-21.82	Peak	100	178	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH02		

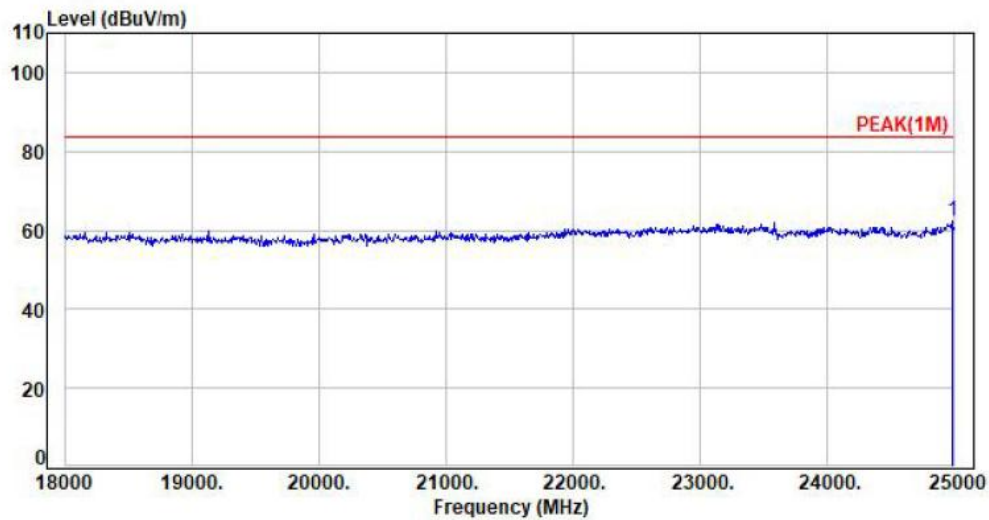

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	24979.00	9.95	52.44	62.39	83.54	-21.15	Peak	100	127	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



6.10 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz




6.11 20dB Bandwidth Measurement Data

6.11.1 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 1% to 5% of the 20dB Bandwidth and VBW to approximately three times RBW.
- The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

6.11.2 Test Setup Layout

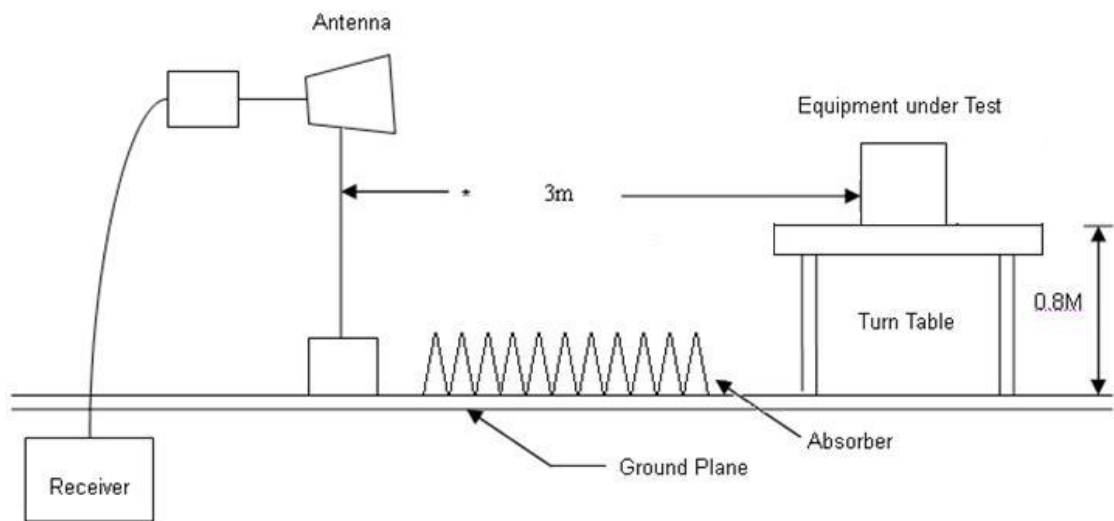


6.11.3 Test Setup Layout


Frequency (MHz)	20dB Bandwidth (MHz)
2405.00	0.57
2445.00	0.55
2477.00	0.54



20dB Bandwidth
2405 MHz
CH00

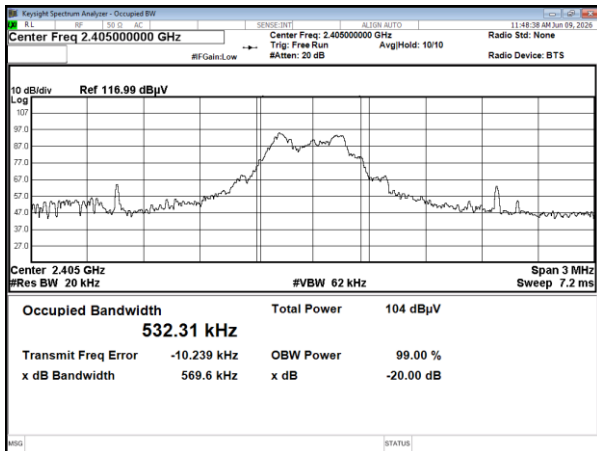

2445 MHz
CH01

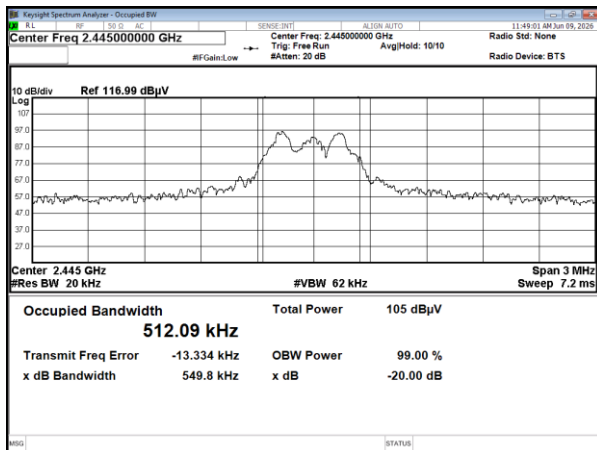

2477 MHz
CH02

