RADIO TEST REPORT

Test Report No. 15102231S-A-R3

Customer	**TOKAI RIKA Co., LTD.**
Description of EUT	**UWB Electronic Key**
Model Number of EUT	**B3S2P2Z**
FCC ID	**MOZB3S2P2Z**
Test Regulation	**FCC Part 15 Subpart F**
Test Result	**Complied**
Issue Date	**September 2, 2024**
Remarks	**UWB part(s)**

Representative Test Engineer	**Approved By**
Y. Murakami	T.imamura
Yosuke Murakami Engineer	Toyokazu Imamura Engineer

CERTIFICATE 1266.03

☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.
☒ There is no testing item of "Non-accreditation".

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 23.0

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested. (Laboratory was not involved in sampling.)
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.
  It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Shonan EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided from the customer for this report is identified in Section 1.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

REVISION HISTORY

Original Test Report No. 15102231S-A

This report is a revised version of 15102231S-A-R2. 15102231S-A-R2 is replaced with this report.

Revision	Test Report No.	Date	Revised Contents
- (Original)	15102231S-A	June 27, 2024	-
1	15102231S-A-R1	August 7, 2024	p.15, Correction OBW value. p.16, p.18, The comment of “(* For RBW less than 960 MHz was set according to FCC 15.209. Above 960 MHz was set to 1 MHz.)” was moved under the table. Additional the comment of “(** There were no detect UWB emissions in the range that below 960 MHz)”. p.19-22, Additional plot chart. p.14, p.23, Correction OBW value. p.24, Correction OBW data.
2	15102231S-A-R2	August 27, 2024	p.5 Addition of the variation models in Clause 2.2. p.24 The data of occupied bandwidth measured at RBW 1 MHz, which was deleted for correction, was restored. p.25, Correction value. (500 kHz -> 500 MHz) p.26, Additional mark of “AE power off”. Additional comment for description of this test. “* Although no transmission signal was seen after the companion device was turned off, the transmitter timeout result was assumed to be the time for one period transmission, assuming that the time for one period transmission that EUT may transmit. * This EUT was stopped transmit unless there is a second trigger at the Transmitter timeout of the UWB after the Trigger (LF transmission). The start of this chart is the time when the EUT and companion device powered up and started communicating. The transmission signal was no longer displayed when the companion device performed power off. This EUT is stopped transmit unless there is a second trigger at the Transmitter timeout of the UWB after the Trigger (LF transmission). The transmitter timeout result was within 10 seconds, including the transmission time with one cycle.”
3	15102231S-A-R3	September 2, 2024	p.24, p.25, Deleted a value of 99 % occupied bandwidth in 10 dB bandwidth data, and Deleted a value of Center frequency of 99 % occupied bandwidth data. p.26, It has rewritten the disunified words into unified words. (AE -> companion device, period -> sequence)

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	IEC	International Electrotechnical Commission
AFH	Adaptive Frequency Hopping	IEEE	Institute of Electrical and Electronics Engineers
AM	Amplitude Modulation	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISO	International Organization for Standardization
AP	Access Point	JAB	Japan Accreditation Board
APD	Absorbed Power Density	LAN	Local Area Network
ASK	Amplitude Shift Keying	LIMS	Laboratory Information Management System
Atten., ATT	Attenuator	MCS	Modulation and Coding Scheme
AV	Average	MRA	Mutual Recognition Arrangement
BPSK	Binary Phase-Shift Keying	N/A	Not Applicable
BR	Bluetooth Basic Rate	NIST	National Institute of Standards and Technology
BT	Bluetooth	NS	No signal detect.
BT LE	Bluetooth Low Energy	NSA	Normalized Site Attenuation
BW	BandWidth	NVLAP	National Voluntary Laboratory Accreditation Program
Cal Int	Calibration Interval	OBW	Occupied Band Width
CCK	Complementary Code Keying	OFDM	Orthogonal Frequency Division Multiplexing
Ch., CH	Channel	P/M	Power meter
CISPR	Comite International Special des Perturbations Radioelectriques	PCB	Printed Circuit Board
CW	Continuous Wave	PER	Packet Error Rate
DBPSK	Differential BPSK	PHY	Physical Layer
DC	Direct Current	PK	Peak
D-factor	Distance factor	PN	Pseudo random Noise
DFS	Dynamic Frequency Selection	PRBS	Pseudo-Random Bit Sequence
DQPSK	Differential QPSK	PSD	Power Spectral Density
DSSS	Direct Sequence Spread Spectrum	QAM	Quadrature Amplitude Modulation
EDR	Enhanced Data Rate	QP	Quasi-Peak
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QPSK	Quadri-Phase Shift Keying
EMC	ElectroMagnetic Compatibility	RBW	Resolution Band Width
EMI	ElectroMagnetic Interference	RDS	Radio Data System
EN	European Norm	RE	Radio Equipment
ERP, e.r.p.	Effective Radiated Power	RF	Radio Frequency
EU	European Union	RMS	Root Mean Square
EUT	Equipment Under Test	RSS	Radio Standards Specifications
Fac.	Factor	Rx	Receiving
FCC	Federal Communications Commission	SA, S/A	Spectrum Analyzer
FHSS	Frequency Hopping Spread Spectrum	SAR	Specific Absorption Rate
FM	Frequency Modulation	SG	Signal Generator
Freq.	Frequency	SVSWR	Site-Voltage Standing Wave Ratio
FSK	Frequency Shift Keying	TR	Test Receiver
GFSK	Gaussian Frequency-Shift Keying	Tx	Transmitting
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System	Vert.	Vertical
Hori.	Horizontal	WLAN	Wireless LAN
HPF	High-Pass Filter	WPT	Wireless Power Transmit

CONTENTS PAGE

SECTION 1: Customer Information 5
SECTION 2: Equipment Under Test (EUT) 5
SECTION 3: Test specification, Procedures & Results 6
SECTION 4: Operation of EUT during testing 9
SECTION 5: Radiated Emission 12
SECTION 6: UWB bandwidth and 99 % occupied bandwidth 14
SECTION 7: Transmitter timeout 14
APPENDIX 1: Test Data 15
Radiated emission 15
Radiated emission (GPS band) 22
Peak level of the emission 23
UWB Bandwidth 24
Transmitter timeout 26
APPENDIX 2: Test instruments 27
APPENDIX 3: Photographs of test setup 29
Radiated Emission 29
Pre-check of Worst Case Position 31
Transmitter timeout 32

SECTION 1: Customer Information

Company Name	TOKAI RIKA Co., LTD.
Address	3-260 Toyota, Oguchi-cho, Niwa-gun, Aichi 480-0195, Japan
Telephone Number	+81-587-95-0093
Contact Person	Tetsuhiro Okuoka

The Information provided by the customer is as follows;
- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

SECTION 2: Equipment Under Test (EUT)

2.1 Identification of EUT

Description	UWB Electronic Key
Model Number	B3S2P2Z
Serial Number	Refer to SECTION 4.2
Condition	Engineering prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	S/N. 926 and 927: February 16, 2024 S/N. 953: June 8, 2024
Test Date	February 23 to June 14, 2024

2.2 Product Description

General Specification

Rating	DC 3.0 V (battery (DC 2.5 V to 3.3 V))
Operating temperature	-30 deg. C to 60 deg. C

Radio Specification

[UHF part]

Equipment Type	Transmitter
Frequency of Operation	Channel 1(CH 1): 312.10 MHz Channel 2(CH 2): 314.35 MHz
Type of Modulation	FSK

[LF part]

Equipment Type	Receiver
Frequency of Operation	134.2 kHz
Type of Modulation	ASK

[UWB part]

Equipment Type	Transceiver
Frequency of Operation	6489.6 MHz
Type of Modulation	BPM-BPSK (Burst Position Modulation and Binary Phase-Shift-Keying)

*Tested model has variation models: Original (4 switches), Variation A (3 switches) and Variation B (2 switches).
The differences of these variations are appearance and the number of switches.
Therefore the test was performed with original models as representative.

SECTION 3: Test specification, Procedures & Results

3.1 Test Specification

Test Specification	FCC Part 15 Subpart F The latest version on the first day of the testing period
Title	FCC 47 CFR Part 15 Radio Frequency Device Subpart F Ultra-Wideband Operation Section 15.207 Conducted limits Section 15.503 Definitions Section 15.505 Cross reference Section 15.519 Technical requirements for hand held UWB systems Section 15.521 Technical requirements applicable to all UWB devices

3.2 Procedures and Results

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Conducted Emission	**FCC:** ANSI C63.10-2013 6. Standard test methods	**FCC:** Section 15.207 Section 15.505(a) Section 15.521(j)	-	N/A	*1)
	ISED: RSS-Gen 8.8	**ISED:** RSS-220 5.2.1(b)			
UWB Bandwidth	**FCC:** Section 15.503(a) ANSI C63.10: 2013 6 Standard test methods, 10 Procedures for measuring ultra-wideband devices	**FCC:** Section 15.503(d) Section 15.519 (b)	See data.	Complied	Radiated
	ISED: RSS-220 Annex 2	**ISED:** RSS-220 2, RSS-220 5.1			
Radiated emission	**FCC:** Section 15.503(a) ANSI C63.10: 2013 6 Standard test methods, 10 Procedures for measuring ultra-wideband devices	**FCC:** Section 15.209, Section 15.505, Section 15.519 (c) (d),Section 521(c)	0.02 dB 6589.690 MHz AV, Horizontal (Transmitting)	Complied	Radiated
	ISED: RSS-Gen 6.5 RSS-220 Annex 4	**ISED:** RSS-220 5.3.1(c)(d)(e)			
Peak level of the Emission	**FCC:** Section 15.521(e)(g) ANSI C63.10: 2013 6 Standard test methods, 10 Procedures for measuring ultra-wideband devices	**FCC:** Section 15.519 (e)	-	Complied	Radiated
	ISED: RSS-220 Annex 4	**ISED:** RSS-220 5.3.1(g)			
Transmitter timeout	**FCC:** Section 15.519(a)(1) ANSI C63.10: 2013 6 Standard test methods, 10 Procedures for measuring ultra-wideband devices	**FCC:** Section 15.519 (a)(1)	-	Complied	Conducted
	ISED: RSS-220 Annex 4	**ISED:** RSS-220 5.3.1(b)			

Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593.

*1) This test not applicable since the EUT does not have AC Mains.

FCC Part 15.31 (e)
The test was performed with the New Battery and the stable voltage was supplied to the EUT during the tests.
Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement
It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT.
Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.3 Addition to Standard

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
99 % Occupied Bandwidth	**ISED:** RSS-Gen 6.7	**ISED:** -	N/A	-	Radiated

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

Measurement uncertainty is not taken into account when stating conformity with a specified requirement.
Note: When margins obtained from test results are less than the measurement uncertainty, the test results may exceed the limit.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor *k*=2.

Item	Frequency range	Uncertainty (+/-)
Conducted Emission (AC Mains) LISN	150 kHz-30 MHz	3.2 dB
Radiated Emission (Measurement distance: 3 m)	9 kHz-30 MHz	3.3 dB
	30 MHz-200 MHz	4.9 dB
	200 MHz-1 GHz	6.2 dB
	1 GHz-6 GHz	4.7 dB
	6 GHz-18 GHz	5.3 dB
	18 GHz-40 GHz	5.5 dB
Radiated emission (Measurement distance: 1 m)	1 GHz-18 GHz	5.6 dB
	18 GHz-40 GHz	5.8 dB

Radiated Emission (Substitution measurement)

Substitution measurement (EUT height: 1.5 m, Distance: 3 m)	
Frequency range	Uncertainty (+/-)
30 MHz - 200 MHz	4.3 dB
200 MHz - 1000 MHz	3.5 dB
1 GHz - 13 GHz	4.1 dB

Substitution measurement (EUT height: 1.5 m, Distance: 1 m)	
Frequency range	Uncertainty (+/-)
1 GHz - 13 GHz	4.7 dB
13 GHz - 18 GHz	5.4 dB
18 GHz - 26.5 GHz	3.8 dB
26.5 GHz - 40 GHz	3.9 dB

Substitution measurement (EUT height: 1.5 m, Distance: 0.5 m)	
Frequency range	Uncertainty (+/-)
1 GHz - 13 GHz	4.7 dB
13 GHz - 18 GHz	5.3 dB
18 GHz - 26.5 GHz	3.8 dB
26.5 GHz - 40 GHz	3.8 dB

Substitution measurement (EUT height: 1.5 m, Distance: 0.3 m)	
Frequency range	Uncertainty (+/-)
1 GHz - 13 GHz	4.8 dB
13 GHz - 18 GHz	5.3 dB
18 GHz - 26.5 GHz	3.8 dB
26.5 GHz - 40 GHz	3.8 dB

Substitution measurement (EUT height: 1.5 m, Distance: 0.1 m)	
Frequency range	Uncertainty (+/-)
13 GHz - 18 GHz	5.6 dB
18 GHz - 26.5 GHz	4.2 dB
26.5 GHz - 40 GHz	4.2 dB

3.5 Test Location

UL Japan, Inc. Shonan EMC Lab.
1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 Japan
Telephone: +81-463-50-6400
A2LA Certificate Number: 1266.03
(FCC test firm registration number: 626366, ISED lab company number: 2973D / CAB identifier: JP0001)

Test room	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
No.1 Semi-anechoic chamber (SAC1)	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.2 Semi-anechoic chamber (SAC2)	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.3 Semi-anechoic chamber (SAC3)	12.7 x 7.7 x 5.35	12.7 x 7.7	5 m
No.4 Semi-anechoic chamber (SAC4)	8.1 x 5.1 x 3.55	8.1 x 5.1	-
Wireless anechoic chamber 1 (WAC1)	9.5 x 6.0 x 5.4	9.5 x 6.0	3 m
Wireless anechoic chamber 2 (WAC2)	9.5 x 6.0 x 5.4	9.5 x 6.0	3 m
No.1 Shielded room	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.2 Shielded room	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.3 Shielded room	6.3 x 4.7 x 2.7	6.3 x 4.7	-
No.4 Shielded room	4.4 x 4.7 x 2.7	4.4 x 4.7	-
No.5 Shielded room	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.6 Shielded room	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.8 Shielded room	3.45 x 5.5 x 2.4	3.45 x 5.5	-
No.1 Measurement room	2.55 x 4.1 x 2.5	-	-
No.2 Measurement room	4.5 x 3.5 x 2.5	-	-
Wireless shielded room 1	3.0 x 4.5 x 2.7	3.0 x 4.5	-
Wireless shielded room 2	3.0 x 4.5 x 2.7	3.0 x 4.5	-

3.6 Test Data, Test Instruments, and Test Set Up

Refer to APPENDIX.

SECTION 4: Operation of EUT during testing

4.1 Operating Mode(s)

Test Item	Operating Mode	Tested frequency
Other than Transmitter timeout test	Transmitting (Tx) ch5 (6489.6 MHz)	6489.6 MHz
Transmitter timeout test	Normal transmitting (Tx) ch5 (6489.6 MHz)	6489.6 MHz

*Power of the EUT was set by the software as follows;
Power Setting: Fixed
Software: software for UWB/Version:
1)20220415__00002304_project (for all test)
2)UWBSLAVE_104_4_Tx_3100_5600_18900_5700_+3.75_-.75_200_Rx_0
(Radiated emission tests for transmitter test, receiver test)
3)UWBKEYCARD_410
Date:1) 2022/04/15
2) 2024/06/07
3) 2022/03/28
Storage location: Driven by connected PC
*This setting of software is the worst case.
Any conditions under the normal use do not exceed the condition of setting.
In addition, end users cannot change the settings of the output power of the product.

4.2 Configuration and Peripherals

[Other than Transmitter timeout test]

*Test data was taken under worse case conditions.

Description of EUT and support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	UWB Electronic Key	B3S2P2Z	927 *1) 953 *2)	TOKAI RIKA CO., LTD.	EUT

*1) Used for band of 30 MHz to 2 GHz.
*2) Used for another band.

[Transmitter timeout test]

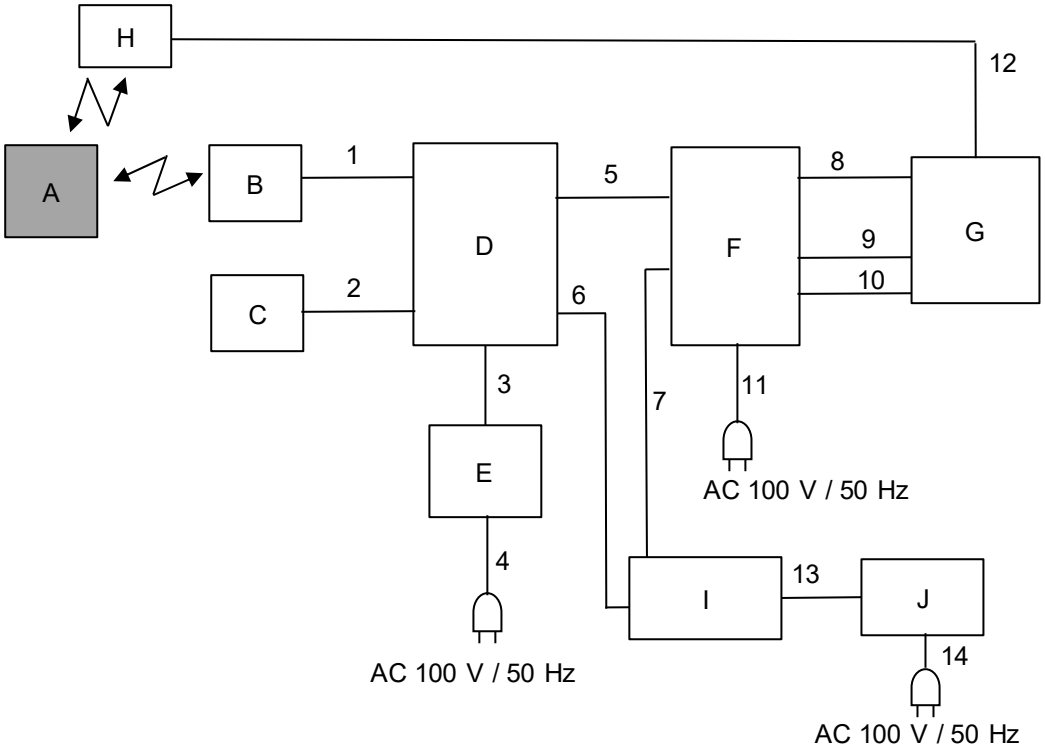

Description of EUT and Support Equipment

No.	Item	Model number	Serial Number	Manufacturer	Remarks
A	UWB Electronic Key	B3S2P2Z	926	TOKAI RIKA CO., LTD.	EUT
B	UWB ECU	TRUM21A1	6M6	TOKAI RIKA CO., LTD.	Companion device (main)
C	UWB ECU	TRUM21A1	6S6	TOKAI RIKA CO., LTD.	Companion device (secondary)
D	UWB checker	UWB_Emulator_PC_ Tool_V205	SS2-495	TOKAI RIKA CO., LTD.	-
E	AC adapter	AD-A120P300	2109	Xiamen UME Electronics Co., Ltd.	-
F	Smart key checker	Ver.2.61	-	TOKAI RIKA CO., LTD.	-
G	LF driver	Ver.2.12	1902001	TOKAI RIKA CO., LTD.	-
H	LF antenna	D33151	000072	TOKAI RIKA CO., LTD.	-
I	Laptop computer	PB552HEAP27A71	7D47661H	Toshiba	-
J	AC adapter	PA3755U-1ACA	671C000A5210 (G71C000A5210)	Toshiba	-

List of Cables Used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC & signal cable	2.9	Unshieled	Unshieled	-
2	DC & signal cable	13.0	Unshieled	Unshieled	-
3	DC	1.8	Unshielded	Unshielded	-
4	AC	1.7	Unshielded	Unshielded	-
5	Signal cable (UWB trigger)	0.8	Unshielded	Unshielded	-
6	USB	1.8	Shielded	Shielded	-
7	USB	1.1	Shielded	Shielded	-
8	Signal cable (LF put)	0.6	Unshielded	Unshielded	-
9	DC (+12 V) cable	1.0	Unshielded	Unshielded	-
10	GND (0 V) cable	1.0	Unshielded	Unshielded	-
11	AC	1.9	Unshielded	Unshielded	-
12	LF antenna cable	2.9	Unshielded	Unshielded	-
13	DC	1.8	Unshielded	Unshielded	-
14	AC	0.8	Unshielded	Unshielded	-

SECTION 5: Radiated Emission

Test Procedure

[For below 30 MHz]
EUT was placed on a platform of nominal size, 0.5 m by 0.5 m, raised 0.8 m above the conducting ground plane. The table is made of expanded polystyrol and expanded polypropylene. That has very low permittivity.
The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.
The measurements were performed for vertical polarization (antenna angle: 0 deg., 45 deg., 90 deg., and 135 deg.) and horizontal polarization.
*Refer to Figure 1 about Direction of the Loop Antenna.

[For 30 MHz to 960 MHz]
EUT was placed on a platform of nominal size, 0.5 m by 0.5 m, raised 0.8 m above the conducting ground plane. The table is made of expanded polystyrol and expanded polypropylene. That has very low permittivity.

[For 960 MHz to 1000 MHz]
EUT was placed on a urethane platform of nominal size, 0.15 m by 0.05 m, raised 1.5 m above the conducting ground plane.

[For above 1000 MHz]
EUT was placed on a urethane platform of nominal size, 0.15 m by 0.05 m, raised 1.5 m above the conducting ground plane.

UWB emissions and other emissions:
1) The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.
The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.
The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).
The test was made with the detector (RBW/VBW) in the following table.
When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

(UWB emissions only) (refer to ANSI C63.10 (reference ANSI C63.26))
2) Exchanged the EUT to the Substitution Antenna, the measurement was set for the same height 1.5 m as the EUT. The frequency below 1 GHz of the Substitution Antenna was used the Half wave dipole Antenna, which was tuned the measured frequency in 1).
The frequency above 1 GHz of the Substitution Antenna was used Horn Antenna.
The Substitution Antenna was connected to the Signal Generator, and the polarized electromagnetic radiation of the Substitution Antenna was matched with the one of the measuring Antenna, which was set with the Signal Generator to the measured frequency in 1). Then, we set with the Output power (CW) of the Signal Generator where the measuring electromagnetic field strength is equal to the measured value in 1) by means of varying the measuring antenna height between 1 to 4 m to obtain maximum receiving level.
Its Output power of Signal Generator was recorded.

3) Equivalent isotropic radiated power was calculated by subtracting the cable loss and the attenuator loss connected between the signal generator and the substitution antenna from the output power of the signal generator recorded in 2).
For the usage of the antenna (horn antenna) for the substitution antenna, the equivalent isotropic radiated power was calculated by compensating the finite substitution antenna.

Figure 1: Direction of the Loop Antenna

Side View (Vertical)

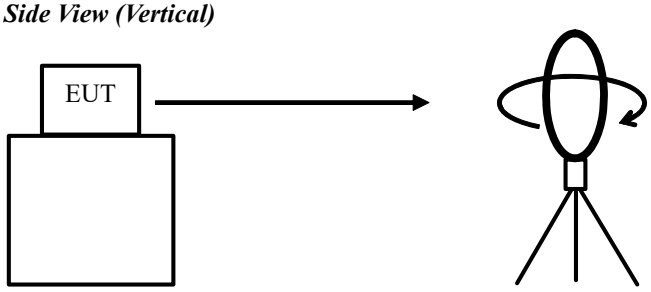

Top View (Horizontal)

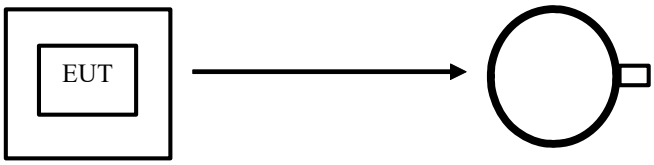

Antenna was not rotated.

Top View (Vertical)

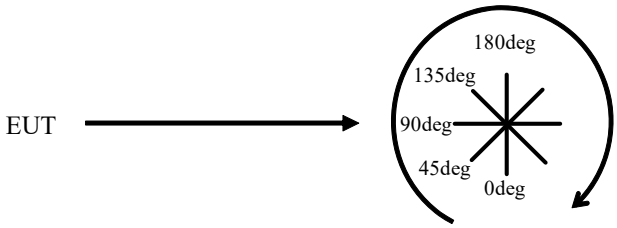

Front side: 0 deg.
Forward direction: clockwise

Test Antennas are used as below;

Frequency	Below 30 MHz	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Loop	Biconical	Logperiodic	Horn

Frequency	Below 30 MHz	30 to 960 MHz	Above 960 MHz	
Instrument used	Test Receiver	Test Receiver	Spectrum Analyzer	
Detector	Quasi-Peak	Quasi-Peak	Peak	RMS (AV) *2)
IF Bandwidth	BW 9 kHz	BW 120 kHz	UWB spurious emission: RBW: 1 MHz, VBW: 3 MHz Carrier emission: RBW: 50 MHz, VBW: 80 MHz	UWB spurious emission: RBW: 1 MHz, VBW: 3 MHz GPS band emission: RBW: 1 kHz, VBW: 3 kHz
Test Distance	3 m	3 m	3.0 m (960 MHz to 1 GHz) 0.5 m (1 GHz to 10.6 GHz) *1) 0.3 m (10.6 GHz to 18 GHz) *1) 0.1 m (above 18 GHz) *1)	

*1) For section 10.3.2 of ANSI C63.10: 2013. This measurement was performed at less than 3 m due to the small radiation emission of EUT. In addition, this measurement was performed by the substitution measurement.
Since there are frequencies that are the distance of the near field condition with respect to the measurement distance, we have verified the measurement results in the near field condition and the far field condition and confirmed that there was no difference in the test results.

*2) For section 10.3.7 of ANSI C63.10: 2013. This measurement was set the sweep time so that there is no more than a 1 ms integration period over each measurement bin.

- The carrier level and noise levels were confirmed at each position of X, Y and Z, Top or Bottom axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Polarity	Frequency [GHz]							
	Below 0.030	0.030 to 0.96	0.96 to 1	1 to 2	2 to 10.6	10.6 to 18	18 to 26.5	26.5 to 40
Horizontal	X	X	X	X	X	Z	Y	Z
Vertical	X	X	X	X	Y	X	Z	Y

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 9 kHz to 40 GHz
Test data : APPENDIX
Test result : Pass

SECTION 6: UWB bandwidth and 99 % occupied bandwidth

Test Procedure

The tests were made with below setting by a radiated electric field in semi-anechoic chamber.

Test	Span	RBW	VBW	Sweep	Detector	Trace	Instrument used
UWB Bandwidth, 99 % Occupied Bandwidth	1 GHz	1 MHz or 10 MHz	3 MHz or 40 MHz	Auto	Peak	Max Hold	Spectrum Analyzer

Test data : APPENDIX
Test result : Pass

SECTION 7: Transmitter timeout

Test Procedure

The test was made with spectrum analyzer.

Test Data : APPENDIX
Test Result : Pass

APPENDIX 1: Test Data

Radiated emission

Test place	Shonan EMC Lab. No.1 Semi Anechoic Chamber
Report No.	15102231S-A-R3
Date	June 11, 2024
Temperature / Humidity	23 deg. C / 52 % RH
Engineer	Yosuke Murakami
Mode	Transmitting ch5

(UWB emission, RBW 1 MHz)

(*SA: Spectrum analyzer, SG: Signal generator, Ant.: substitution antenna)

Band	Pol.	Frequency [MHz]	SA Reading [dBuV/MHz]	SG level [dBm]	Tx Ant.Gain [dBi]	Tx Loss [dB]	-	EIRP Result [dBm/MHz]	EIRP Limit [dBm/MHz]	Margin [dB]	Remarks	Height [cm]	Angle [deg.]
3.1 GHz - 10.6 GHz	Hor.	6589.690	65.48	-41.49	10.53	10.36	-	-41.32	-41.30	0.02	carrier	150	211
3.1 GHz - 10.6 GHz	Ver.	6618.190	65.70	-41.59	10.64	10.38	-	-41.33	-41.30	0.03	carrier	152	303

Sample Calculation :
EIRP Result [dBm/MHz] = SG level [dBm] + Tx Ant.Gain [dBi] - Tx Loss [dB]

(Horizontal)

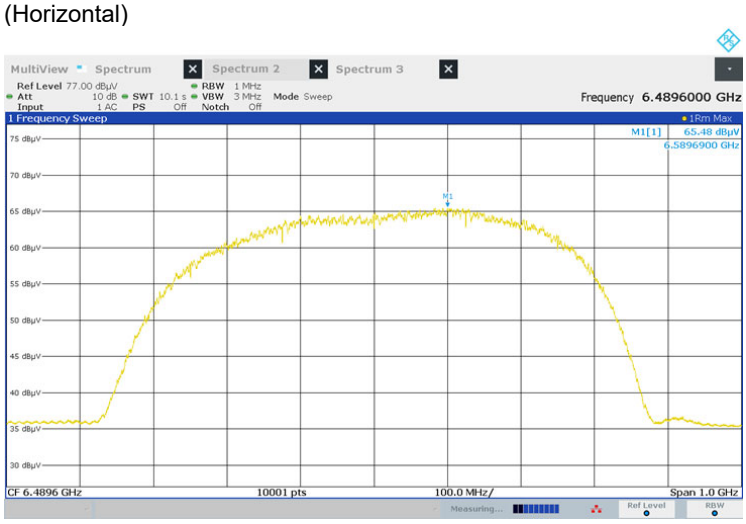

(Vertical)

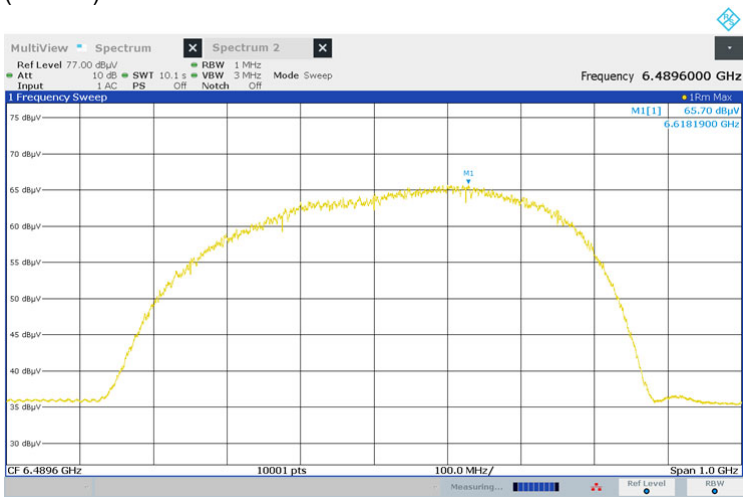

* For RF Exposure evaluation
Maximum RMS power measured: -41.32 dBm/MHz (refer to upper table value) / 10 ^ (-41.32 [dBm/MHz]/ 10) = 0.00007379 mW/MHz
The bandwidth of this equipment was 597.708 MHz (99 % occupied bandwidth, refer to the data of bandwidth sheet)
Total RMS output power was 0.04410487 mW = 0.00007379 mW/MHz x 597.708 MHz
* There were no detect UWB emissions in the range that below 5000 MHz.

Radiated emission

Report No.	15102231S-A-R3		
Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	SAC 1	SAC 3	SAC 1
Date	June 12, 2024	February 24, 2024	February 23, 2024
Temperature / Humidity	24 deg. C / 57 % RH	21 deg. C / 25 % RH	21 deg. C / 31 % RH
Engineer	Yosuke Murakami (9 kHz to 30 MHz)	Miku Ikudome (30 MHz to 1000 MHz)	Masahide Ozaki (1 GHz to 2 GHz)
Semi Anechoic Chamber	SAC 1	SAC 1	
Date	June 11, 2024	June 12, 2024	
Temperature / Humidity	23 deg. C / 52 % RH	24 deg. C / 57 % RH	
Engineer	Yosuke Murakami (2 GHz to 10.6 GHz)	Yosuke Murakami (10.6 GHz to 18 GHz)	
Mode	Transmitting ch5		

(UWB emission, except carrier emission)

9 kHz to 18 GHz

No.	Freq.	Reading	SG Level	TX Ant.Gain	TX Loss	ERP		Margin	Pola.	Height	Angle	TX Ant.Type	Comment
		<PK>				Result	Limit						
	[MHz]	[dBuV]	[dBm]	[dBi]	[dB]	[dBm]	[dBm]	[dB]		[cm]	[deg]		
1	12979.200	35.86	-67.47	13.52	14.64	-68.59	-61.30	7.2	Hori.	152	132	Horn	RMS
2	12979.200	36.64	-65.55	13.52	14.64	-66.67	-61.30	5.3	Vert.	151	243	Horn	RMS

Calculation:Result [dBm] = SG level [dBm] + Tx Ant Gain [dBi] - Tx Loss (Cable)[dB]
Tx Antenna: Horn(1 GHz-40 GHz) / Rx-Antenna: Horn(1 GHz-40 GHz)

* For RBW less than 960 MHz was set according to FCC 15.209, Above 960 MHz was set to 1 MHz .
(* There were no detect UWB emissions in the range that below 960 MHz)

Radiated emission

Report No.	15102231S-A-R3	
Test place	Shonan EMC Lab.	
Semi Anechoic Chamber	SAC 1	SAC 1
Date	June 7, 2024	June 10, 2024
Temperature / Humidity	23 deg. C / 47 % RH	23 deg. C / 51 % RH
Engineer	Kenichi Adachi (18 GHz to 26.5 GHz)	Yosuke Murakami (26.5 GHz to 40 GHz)
Mode	Transmitting ch5	

18 GHz to 26.5 GHz

No.	Freq.	Reading	SG Level	TX Ant.Gain	TX Loss	ERP		Margin	Pola.	Height	Angle	TX Ant.Type	Comment
		<PK>				Result	Limit						
	[MHz]	[dBuV]	[dBm]	[dBi]	[dB]	[dBm]	[dBm]	[dB]		[cm]	[deg]		
1	25958.400	52.22	-50.90	12.47	21.15	-61.73	-61.30	0.4	Hori.	152	134	Horn	RMS Av
2	25958.400	51.50	-51.80	12.47	21.15	-62.63	-61.30	1.3	Vert.	152	258	Horn	RMS Av

Calculation:Result [dBm] = SG level [dBm] + Tx Ant Gain [dBi] - Tx Loss (Cable)[dB]
Tx Antenna: Horn(1 GHz-40 GHz) / Rx-Antenna: Horn(1 GHz-40 GHz)

26.5 GHz to 40 GHz

No.	Freq.	Reading	SG Level	TX Ant.Gain	TX Loss	ERP		Margin	Pola.	Height	Angle	TX Ant.Type	Comment
		<PK>				Result	Limit						
	[MHz]	[dBuV]	[dBm]	[dBi]	[dB]	[dBm]	[dBm]	[dB]		[cm]	[deg]		
1	32448.000	40.61	-87.00	12.53	24.32	-100.94	-61.30	39.6	Hori.	153	246	Horn	RMS
2	38937.602	48.45	-61.82	15.57	27.04	-75.44	-61.30	14.1	Hori.	153	315	Horn	RMS
3	32448.000	40.54	-82.24	12.53	24.32	-96.18	-61.30	34.8	Vert.	151	205	Horn	RMS
4	38937.602	46.61	-61.22	15.57	27.04	-74.84	-61.30	13.5	Vert.	151	225	Horn	RMS

Calculation:Result [dBm] = SG level [dBm] + Tx Ant Gain [dBi] - Tx Loss (Cable)[dB]
Tx Antenna: Horn(1 GHz-40 GHz) / Rx-Antenna: Horn(1 GHz-40 GHz)

Radiated emission

Report No.	15102231S-A-R3
Test place	Shonan EMC Lab.
Semi Anechoic Chamber	SAC 3
Date	February 24, 2024
Temperature / Humidity	21 deg. C / 25 % RH
Engineer	Miku Ikudome
Mode	Transmitting ch5

(Other emission)

No.	Freq.	Reading	Ant.Fac	Loss	Gain	Result	Limit	Margin	Pola.	Height	Angle	Ant. Type	Comment
		(QP)				(QP)	(QP)	(QP)					
	[MHz]	[dBuV]	[dB/m]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[H/V]	[cm]	[deg.]		
1	174.037	21.20	15.87	7.86	32.05	12.88	43.50	30.6	Hori.	150	0	BC	
2	603.022	20.76	19.38	9.93	31.88	18.19	46.00	27.8	Hori.	150	0	LP	
3	857.653	20.14	21.79	10.84	31.22	21.55	46.00	24.4	Hori.	150	0	LP	
4	915.664	20.33	22.04	11.02	30.86	22.53	46.00	23.4	Hori.	150	0	LP	
5	74.285	23.45	6.57	7.08	32.14	4.96	40.00	35.0	Vert.	150	0	BC	
6	154.882	21.59	15.07	7.72	32.07	12.31	43.50	31.1	Vert.	150	0	BC	
7	196.525	20.84	16.55	8.01	32.02	13.38	43.50	30.1	Vert.	150	0	BC	
8	721.781	20.64	20.14	10.38	31.75	19.41	46.00	26.5	Vert.	150	0	LP	
9	868.027	20.15	21.97	10.87	31.16	21.83	46.00	24.1	Vert.	150	0	LP	

Calculation Result [dBuV/m] = Reading [dBuV/m] + Ant.Fac [dB/m] + Loss (Cable+ATT/filter)[dB] - Gain (AMP)[dB]
Ant.Type = BC: Biconical antenna, LP: Logperiodic antenna, **SH*: Horn antenna

(* There were no detect other emissions in the range that below 30 MHz and above 960 MHz)

Radiated emission

(Plot data)

Test place	Shonan EMC Lab.	
Semi Anechoic Chamber	SAC 1	SAC 3
Date	June 12, 2024	February 24, 2024
Temperature / Humidity	24 deg. C / 57 % RH	21 deg. C / 25 % RH
Engineer	Yosuke Murakami (9 kHz to 30 MHz)	Miku Ikudome (30 MHz to 1000 MHz)
Mode	Transmitting ch5	

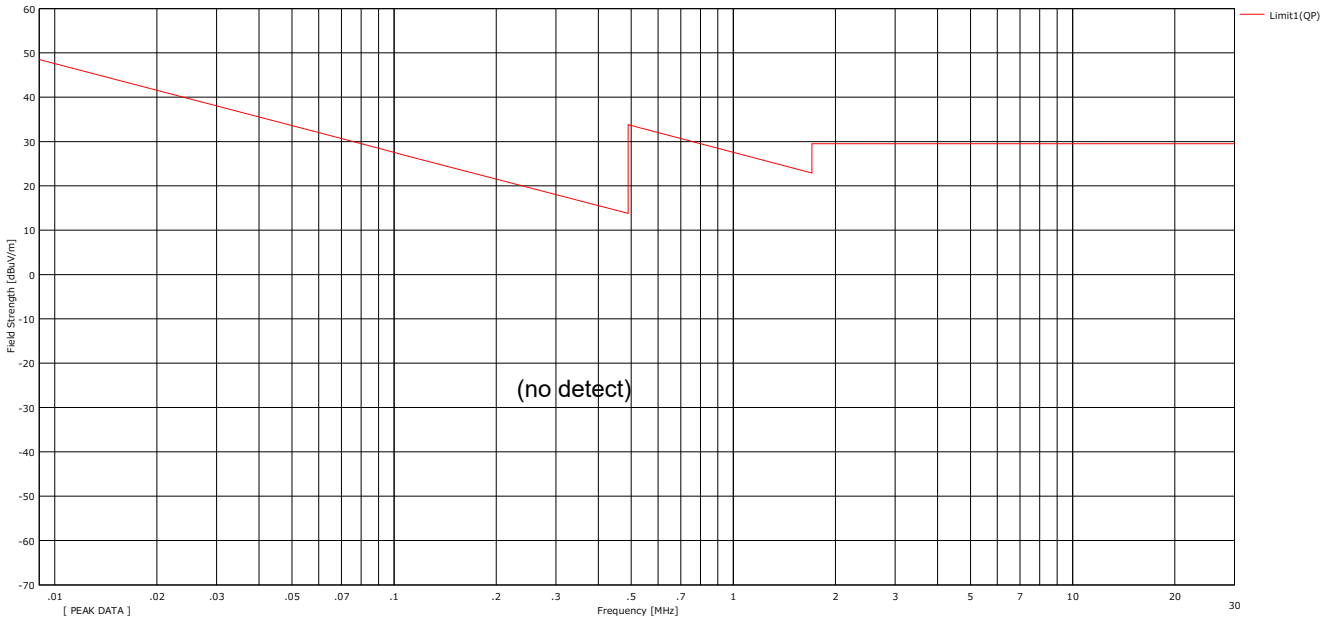

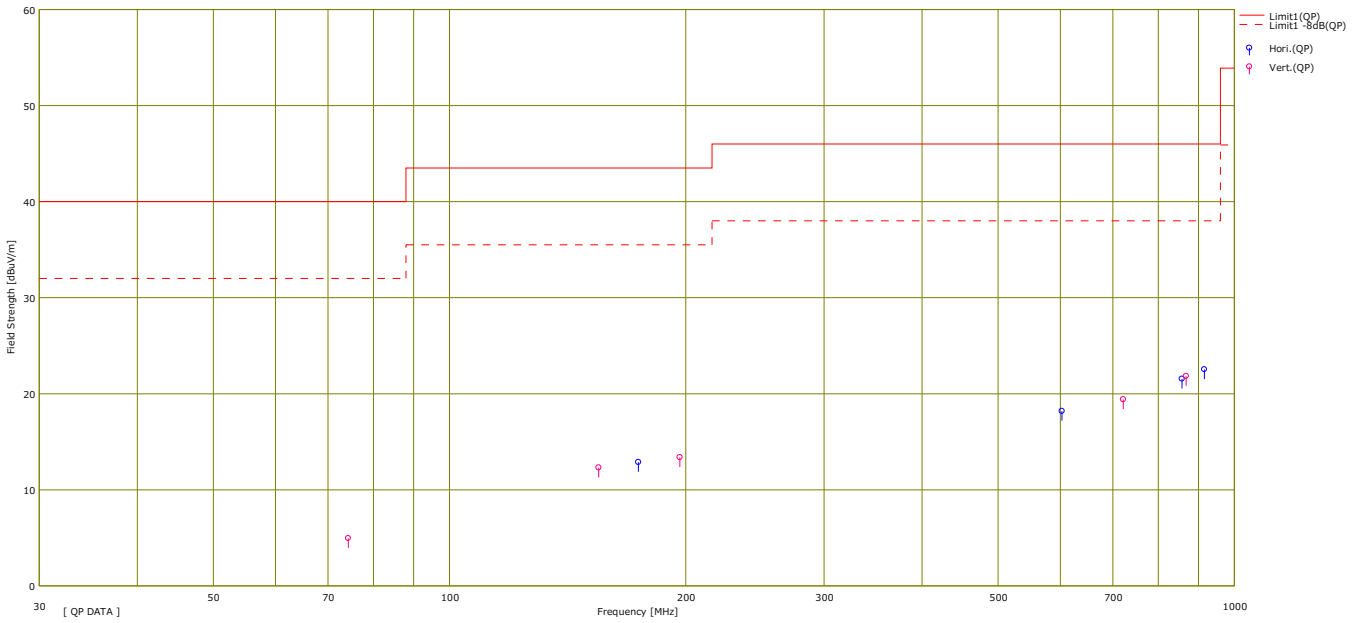

Radiated emission

(Plot data)

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	SAC 3	SAC 1	SAC 1
Date	February 24, 2024	February 23, 2024	June 11, 2024
Temperature / Humidity	21 deg. C / 25 % RH	21 deg. C / 31 % RH	23 deg. C / 52 % RH
Engineer	Miku Ikudome (30 MHz to 1000 MHz)	Masahide Ozaki (1 GHz to 2 GHz)	Yosuke Murakami (2 GHz to 10.6 GHz)
Mode	Transmitting ch5		

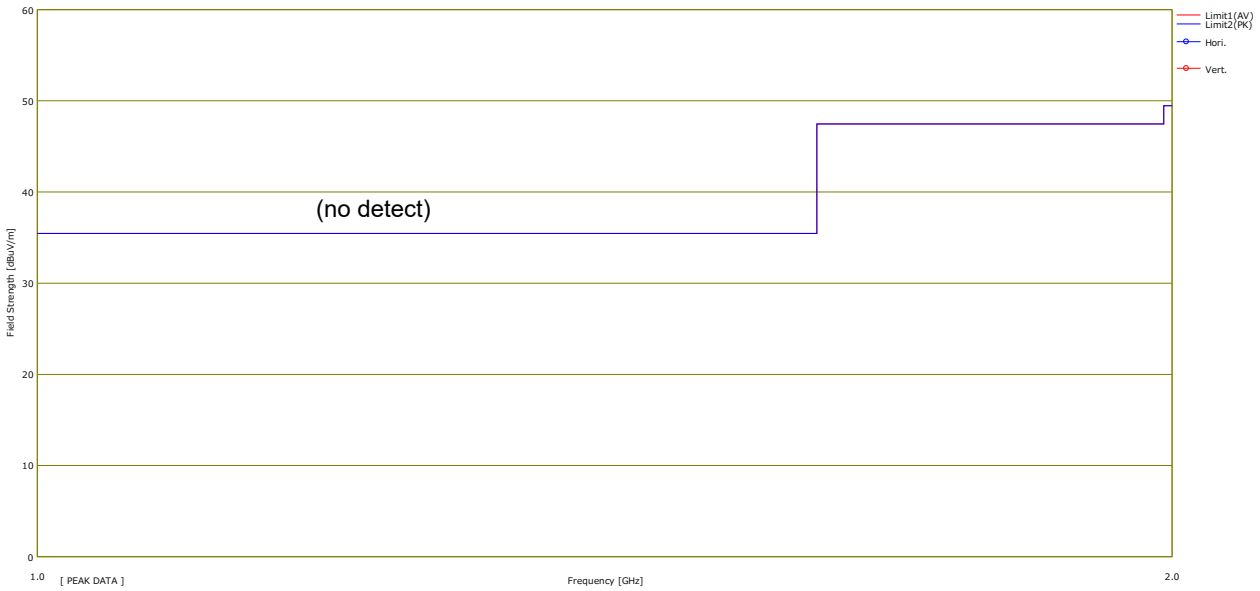

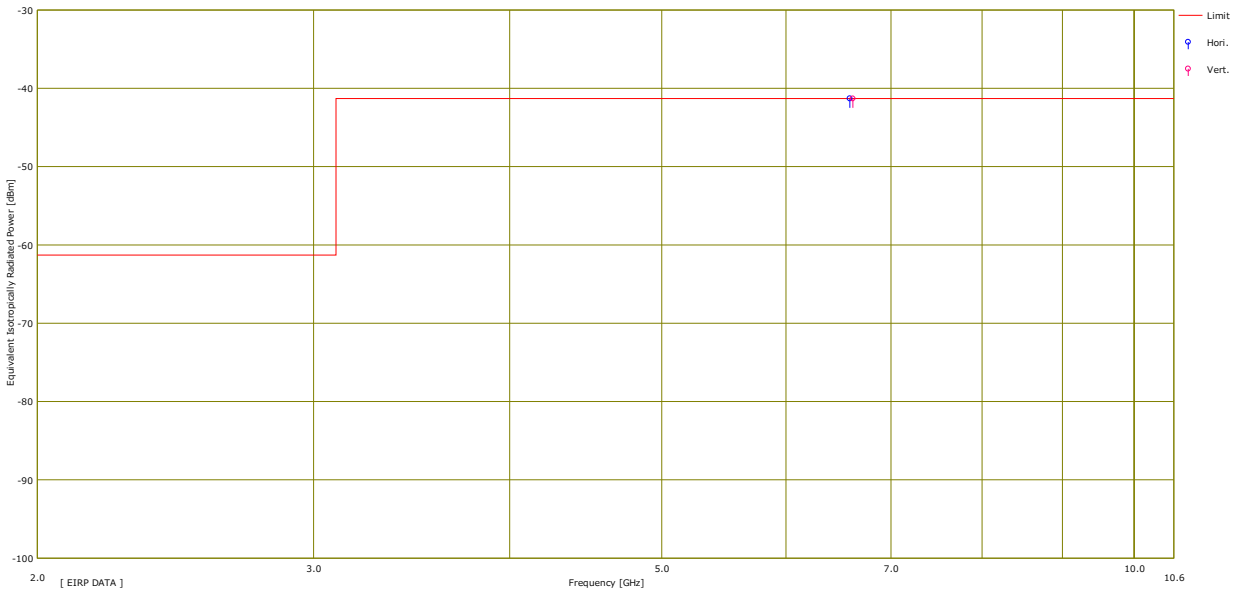

Radiated emission

(Plot data)

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	SAC 1	SAC 1	SAC 1
Date	June 12, 2024	June 7, 2024	June 10, 2024
Temperature / Humidity	24 deg. C / 57 % RH	23 deg. C / 47 % RH	23 deg. C / 51 % RH
Engineer	Yosuke Murakami (10.6 GHz to 18 GHz)	Kenichi Adachi (18 GHz to 26.5 GHz)	Yosuke Murakami (26.5 GHz to 40 GHz)
Mode	Transmitting ch5		

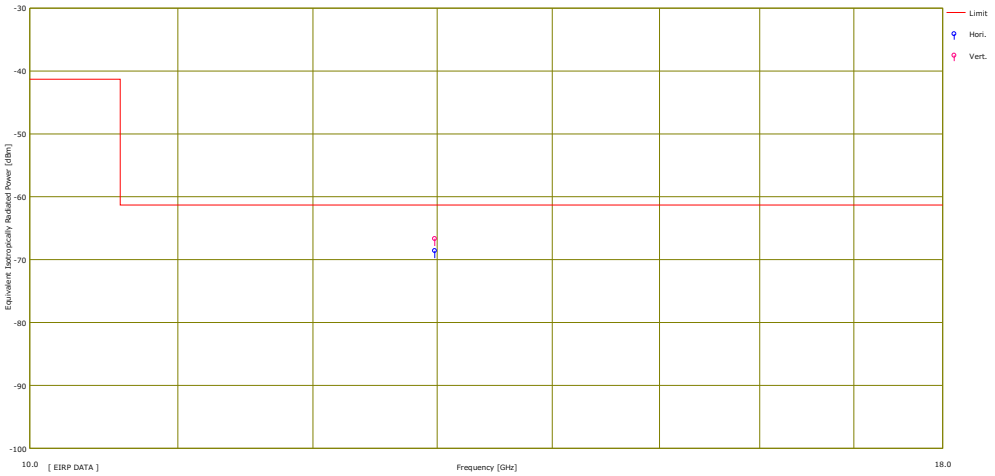

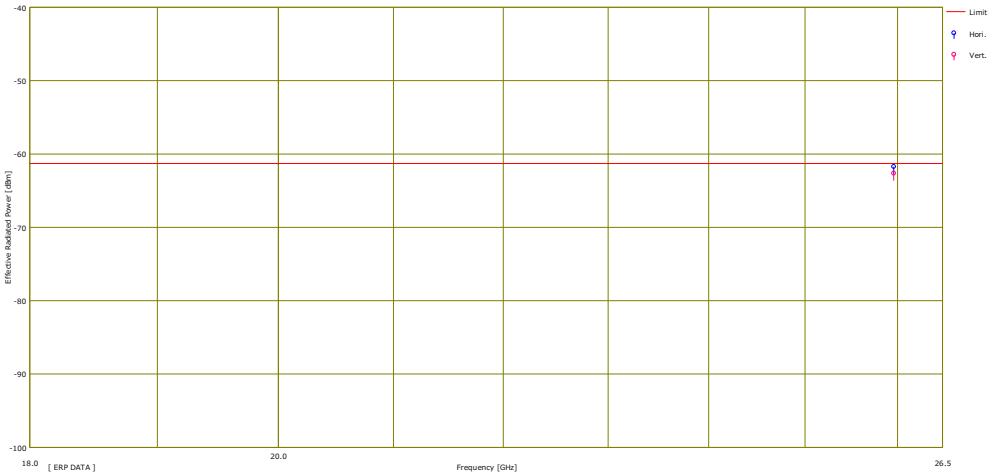

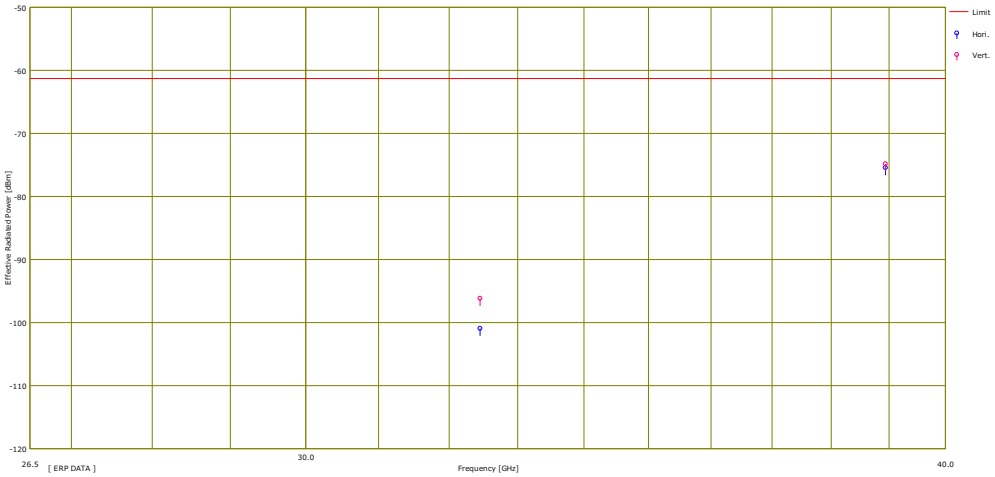

Radiated emission (GPS band)

Report No.	15102231S-A-R3
Test place	Shonan EMC Lab.
Semi Anechoic Chamber	SAC 1
Date	February 23, 2024
Temperature / Humidity	21 deg. C / 31 % RH
Engineer	Masahide Ozaki
Mode	Transmitting ch5

(GPS bands emission)

No.	Freq. [MHz]	Reading <PK> [dBuV]	SG Level [dBm]	TX Ant.Gain [dBi]	TX Loss [dB]	EIRP Result [dBm]	EIRP Limit [dBm]	Margin [dB]	Pola.	Height [cm]	Angle [deg]	TX Ant.Type	Comment
1	1202.000	15.23	-110.00	7.02	4.27	-107.25	-85.30	21.9	Hori.	150	0	Horn	RBW:1 kHz,Floor noise
2	1584.500	15.17	-110.00	9.38	4.94	-105.56	-85.30	20.2	Hori.	150	0	Horn	RBW:1 kHz,Floor noise
3	1202.000	14.81	-110.00	7.02	4.27	-107.25	-85.30	21.9	Vert.	150	0	Horn	RBW:1 kHz,Floor noise
4	1584.500	15.29	-110.00	9.38	4.94	-105.56	-85.30	20.2	Vert.	150	0	Horn	RBW:1 kHz,Floor noise

Calculation:Result [dBm] = SG level [dBm] + Tx Ant Gain [dBi] - Tx Loss (Cable)[dB]
Tx Antenna: Horn(1 GHz-40 GHz) / Rx-Antenna: Horn(1 GHz-40 GHz)

Peak level of the emission

Test place	Shonan EMC Lab. No.1 Semi Anechoic Chamber
Report No.	15102231S-A-R3
Date	June 11, 2024
Temperature / Humidity	23 deg. C / 52 % RH
Engineer	Yosuke Murakami
Mode	Transmitting ch5

(Peak level of the emission)

(*SA: Spectrum analyzer, SG: Signal generator, Ant.: substitution antenna)

Band	Pol.	Frequency [MHz]	SA Reading [dBuV/50 MHz]	SG level [dBm]	Tx Ant.Gain [dBi]	Tx Loss [dB]	RBW converted factor [dB]	EIRP Result [dBm/50 MHz]	EIRP Limit [dBm/50 MHz]	Margin [dB]	Remarks	Height [cm]	Angle [deg.]
3.1 GHz - 10.6 GHz	Hor.	6614.496	104.32	-3.38	10.62	10.37	0.50	-2.63	0.00	2.63	carrier	150	211
3.1 GHz - 10.6 GHz	Ver.	6614.363	104.63	-3.19	10.62	10.37	0.50	-2.44	0.00	2.44	carrier	152	303

Sample Calculation :
EIRP Result [dBm/MHz] = SG level [dBm] + Tx Ant.Gain [dBi] - Tx Loss [dB] + RBW converted factor [dB]
RBW converted factor [dB] = 20 x log (50 / (3 dB measured bandwidth = 47.1834 [MHz]))

(Horizontal)

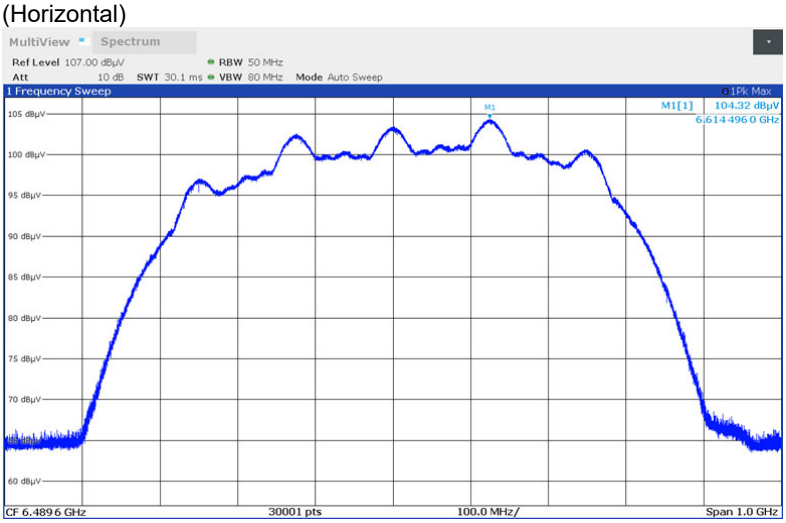

(Vertical)

* For RSP-100 Annex B
Maximum peak power measured: -2.44 dBm/50 MHz (refer to upper table value) / 10 ^(-2.44 [dBm/50 MHz]/ 10) = 0.570164 mW/50 MHz
The bandwidth of this equipment was 597.708 MHz (99 % occupied bandwidth, refer to the data of bandwidth sheet)
Total peak output power was 6.815832 mW = 0.570164 [mW/50 MHz] x 597.708 [MHz] / 50 [MHz]

UWB Bandwidth

Test place	Shonan EMC Lab. No.1 Semi Anechoic Chamber
Report No.	15102231S-A-R3
Date	June 11, 2024
Temperature / Humidity	23 deg. C / 52 % RH
Engineer	Yosuke Murakami
Mode	Transmitting ch5

10 dB Bandwidth: 554.140 MHz (Limit: >= 500 MHz)

Center Frequency 6515.700 MHz (= (fH + fL) / 2)

(worst: vertical)

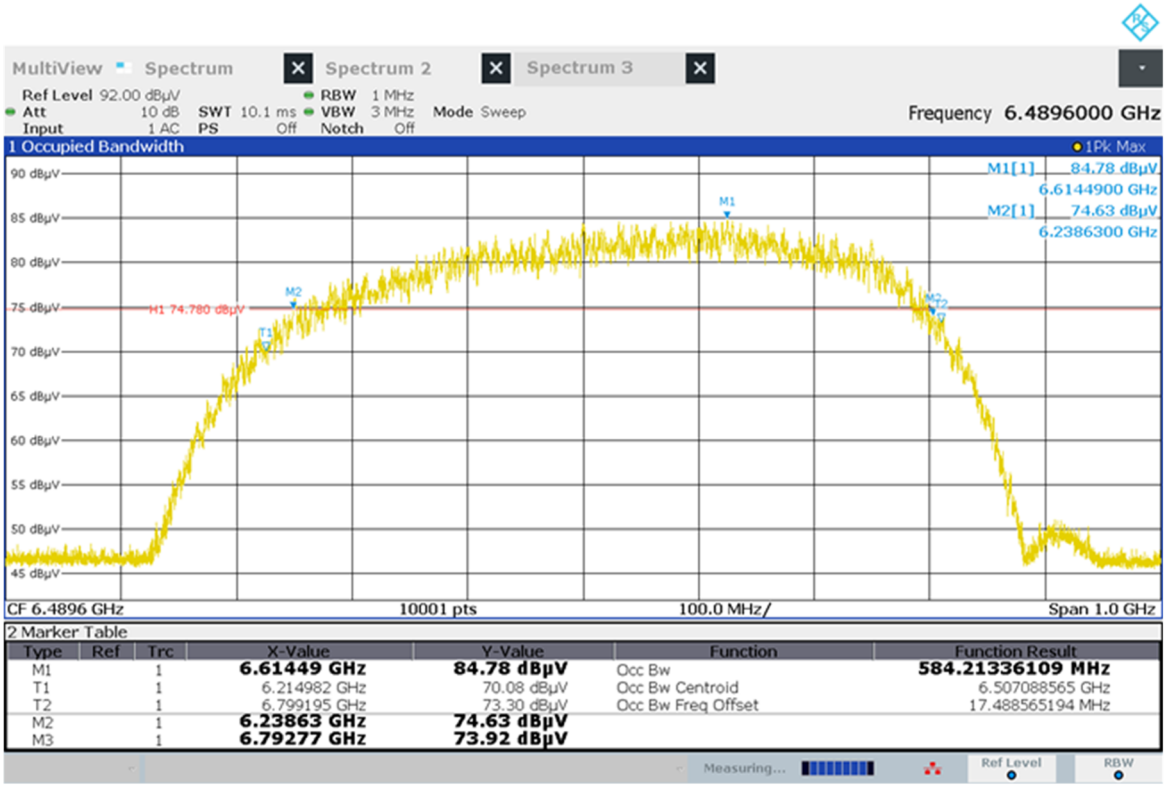

Start Frequency:	5989.600	**MHz**	**f L:**	6238.630	**MHz**
Stop Frequency:	6989.600	**MHz**	**f H:**	6792.770	**MHz**

UWB Bandwidth

Test place	Shonan EMC Lab. No.1 Semi Anechoic Chamber
Report No.	15102231S-A-R3
Date	June 11, 2024
Temperature / Humidity	23 deg. C / 52 % RH
Engineer	Yosuke Murakami
Mode	Transmitting ch5

99 % Occupied Bandwidth 597.7081 MHz

2 Marker Table

Type	Ref	Trc	X-Value	Y-Value	Function	Function Result
M1		1	**6.614 39 GHz**	**95.06 dBµV**	Occ Bw	**597.708 125 661 MHz**
T1		1	6.202 179 GHz	80.00 dBµV	Occ Bw Centroid	6.501 033 332 GHz
T2		1	6.799 887 GHz	81.86 dBµV	Occ Bw Freq Offset	11.433 332 125 MHz
M2		1	**6.228 13 GHz**	**84.10 dBµV**		
M3		1	**6.780 87 GHz**	**84.21 dBµV**		

Transmitter timeout

Test place	Shonan EMC Lab. No.1 Shielded Room
Date	June 14, 2024
Temperature / Humidity	26 deg. C / 46 % RH
Engineer	Kenichi Adachi
Mode	Normal Transmitting ch5

Transmitter Timeout: 98.48 ms (Limit: < 10 s)

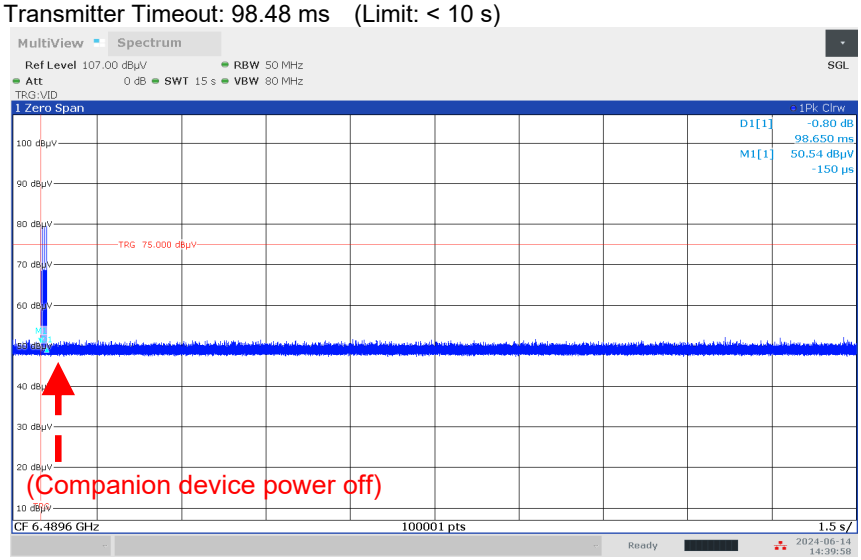

* Although no transmission signal was seen after the companion device was turned off, the transmitter timeout result was assumed to be the time for one sequence transmission, assuming that the time for one sequence transmission that EUT may transmit.
* This EUT was stopped transmit unless there is a second trigger at the Transmitter timeout of the UWB after the Trigger (LF transmission).

(Reference data) 1 sequence chart

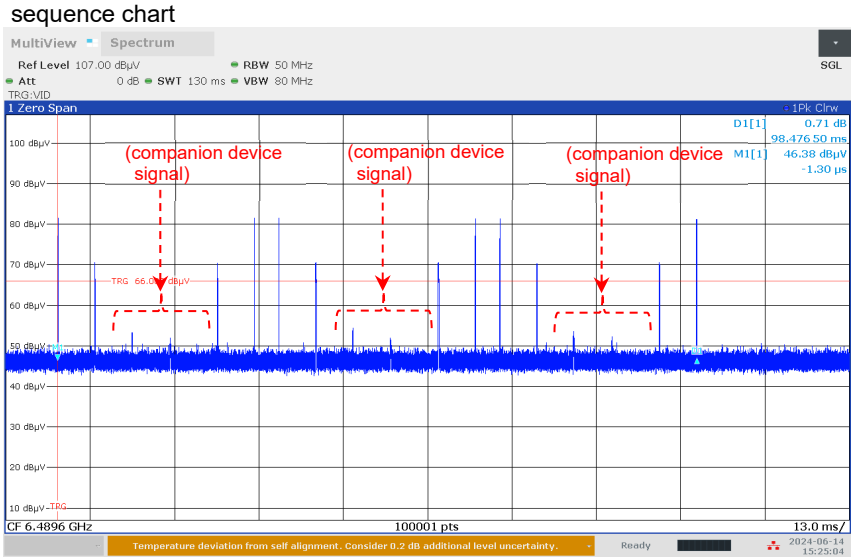

The start of this chart is the time when the EUT and companion device powered up and started communicating.
The transmission signal was no longer displayed when the companion device performed power off.
This EUT is stopped transmit unless there is a second trigger at the Transmitter timeout of the UWB after the Trigger (LF transmission).
The transmitter timeout result was within 10 seconds, including the transmission time with one cycle.

APPENDIX 2: Test instruments

Test Instruments (1/2)

Test Name	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int (Month)
RE	144968	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/141PE/NS4906	-/0901-269(RF Selector)	2024/04/01	12
RE	145003	Pre Amplifier	SONOMA	310N	290211	2024/02/13	12
RE	145007	Pre Amplifier	Toyo Corporation	HAP18-26W	19	2024/03/05	12
RE	145023	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	BBA9106	91032666	2024/05/10	12
RE	145126	Pre Amplifier	SONOMA	310N	290213	2024/02/07	12
RE	145127	Pre Amplifier	Toyo Corporation	TPA0118-36	2072554	2024/05/08	12
RE	145129	Pre Amplifier	Toyo Corporation	HAP26-40W	B3208602403-176	2024/05/09	12
RE	145171	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/141PE/NS4906	-/0901-271(RF Selector)	2024/04/01	12
RE	145176	Coaxial Cable	Suhner	SUCOFLEX 102	32703/2	2023/08/23	12
RE	145384	Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	9120D-726	2024/03/11	12
RE	145501	Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	9120D-739	2024/03/20	12
RE	145512	Horn Antenna	ETS-Lindgren	3160-09	00094868	2023/06/12	12
RE	145514	Horn Antenna	ETS-Lindgren	3160-10	00092383	2023/06/12	12
RE	145515	Horn Antenna	ETS-Lindgren (Cedar Park, Texas)	3116	108256	2024/05/13	12
RE	145529	Logperiodic Antenna	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	196	2024/05/10	12
RE	145536	Loop Antenna	Rohde & Schwarz	HFH2-Z2	100218	2024/04/10	12
RE	145565	Semi-Anechoic Chamber	TDK	SAEC-03(NSA)	3	2024/04/03	12
RE	145568	Semi Anechoic Chamber(ME)	TDK	Semi Anechoic Chamber 3m/10m	1, 2, 3	2022/12/24	24
RE	145597	Semi-Anechoic Chamber	TDK	SAEC-01(NSA)	1	2024/04/16	12
RE	145792	Digital Hitester	HIOKI E.E. CORPORATION	3805-50	80997812	2023/09/25	12
RE	146210	Digital Hitester	HIOKI E.E. CORPORATION	3805-50	80997823	2023/09/25	12
RE	146226	Signal Generator	Keysight Technologies Inc	E8257D-540	MY48051404	2024/01/10	12
RE	146256	Signal Generator	Keysight Technologies Inc	E8257D-550	MY53400714	2024/05/13	12
RE	146432	Tape Measure	TAJIMA	GL19-55	-	-	-
RE	156380	Coaxial Cable	Huber+Suhner	SUCOFLEX_104_E	SN MY 13406/4E	2024/05/09	12
RE	167094	Attenuator	JFW	50HF-006N	-	2024/02/13	12
RE	167096	Attenuator	JFW	50HF-006N	-	2024/02/13	12
RE	167990	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	708Q08R	2023/08/01	12
RE	170932	EMI Software	TSJ (Techno Science Japan)	TEPTO-DV3(RE,CE,ME,PE)	Ver 3.1.0546	-	-
RE	179540	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	802815/2	2024/03/05	12
RE	191837	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	-	2023/08/03	12
RE	191840	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	-	2023/08/03	12
RE	194601	Coaxial Cable	Fjikura	5D-2W	-	2023/12/08	12
RE	194683	Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA 9120 C	694	2024/03/04	12
RE	194684	Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA 9120 C	695	2024/03/11	12
RE	196945	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	803414/2	2024/03/12	12
RE	196985	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	803650/2	2024/03/05	12
RE	200008	Coaxial Cable	Huber+Suhner	SUCOFLEX 104	575616/4	2023/06/06	12
RE	200010	Coaxial Cable	Huber+Suhner	SUCOFLEX 104	575618/4	2023/06/06	12
RE	207279	Tape Measure	ASKUL	-	-	-	-
RE	213530	Test Receiver	Rohde & Schwarz	ESW44	103068	2024/02/22	12
RE	221966	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	2000703/2	2023/06/06	12
RE	235268	Test Receiver	Rohde & Schwarz	ESW44	103212	2023/12/26	12

Test Instruments (2/2)

Test Name	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int (Month)
RE	235269	Spectrum Analyzer	Rohde & Schwarz	FSW43	102488	2023/12/18	12
RE	236869	Coaxial Cable	Huber+Suhner	SUCOFLEX 104	200084/4A	2023/06/06	12
RE	243212	Coaxial Cable	Hayashi-Repic co., Ltd.	SMS13-13A26-NMS13-9.0m	49306-01-01	2023/12/20	12

***1) This test equipment was used for the tests before the expiration date of the calibration.**

***Hyphens for Last Calibration Date, Calibration Due Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.**

The expiration date of the calibration is the end of the expired month.
All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test item: RE: Radiated Emission test