



Test Report

Product Name : IP Sharing + Fast EtherSwitch For Cable/xDSL Modem

Model No. : CAS1040

FCC ID.: MQ4CAS1040

Applicant : AboCom Systems Inc.

Address : 1F, No. 21, R & D Road II, Science-Based
Industrial Park, Hsin-Chu, Taiwan, R.O.C.

Date of Receipt : June 13, 2001

Date of Test : July 18, 2001

Report No. : 016H026FI

The Test Results relate only to the samples tested.


The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Test Report Certification

Test Date : July 18, 2001

Report No. : 016H026FI



Accredited by NIST (NVLAP)
NVLAP Lab Code: 200347-0

Product Name	:	IP Sharing + Fast EtherSwitch For Cable/xDSL Modem
Applicant	:	AboCom Systems Inc.
Address	:	1F, No. 21, R & D Road II, Science-Based Industrial Park, Hsin-Chu, Taiwan, R.O.C.
Manufacturer	:	AboCom Systems Inc.
Model No.	:	CAS1040
FCC ID.	:	MQ4CAS1040
Rated Voltage	:	AC 120V/60Hz
Trade Name	:	AboCom
Measurement Standard	:	CISPR 22:1997
Measurement Procedure	:	ANSI C63.4:1992
Classification	:	Class B
Test Result	:	Complied



The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By	:	<u>Lisa Chen</u> (Lisa Chen)
Tested By	:	<u>Jison</u> (Jison Chang)
Approved By	:	<u>Gene Chang</u> (Gene Chang)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	4
1.1. EUT Description.....	4
1.2. Tested System Details	5
1.3. Configuration of tested System.....	5
1.4. EUT Exercise Software	7
1.5. Test Facility	7
2. Conducted Emission.....	8
2.1. Test Equipment List.....	8
2.2. Test Setup.....	8
2.3. Limits	9
2.4. Test Procedure.....	9
2.5. Test Result.....	9
3. Radiated Emission.....	10
3.1. Test Equipment	10
3.2. Test Setup.....	10
3.3. Limits	11
3.4. Test Procedure.....	11
3.5. Test Result.....	11
4. EMI Reduction Method During Compliance Testing	12
5. Summary of Test Datas	13
5.1. Test Data of Conducted Emission.....	14
5.2. Test Data of Radiated Emission.....	18

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

Reference : Laboratory of License

1. GENERAL INFORMATION

1.1. EUT Description

Product Name : IP Sharing + Fast EtherSwitch For Cable/xDSL Modem
Trade Name : AboCom
FCC ID. : MQ4CAS1040
Model No. : CAS1040
Power Adapter : DVE, DSA-0151A-05A
Cable Out: Non-shielded, 1.8m

Note:

1. This EUT is a IP Sharing + Fast EtherSwitch For Cable/xDSL Modem.
2. Quietek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Conducted Test	Mode 1: 10Mbps Mode 2: 100Mbps
Radiated Test	Mode 1: 10Mbps Mode 2: 100Mbps

1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:


	Product	Manufacturer	Model No.	Serial No.	FCC ID
(1)	PC	PC	ASUS	P2L97	DoC
(2)	Monitor	VIEWSONIC	VCDTS21490-1P	ERO1502850	DoC
(3)	Mouse	Logitech	M-S35	LZA75102600	--
(4)	Keyboard	ACER	6311-TW4C	916590704C91F24343	--
(5)	PC	IBM	16W	BNL676N	DoC
(6)	Monitor	VIEWSONIC	VCDTS21490-1P	ERO1502869	DoC
(7)	Mouse	Logitech	M-S34	LZA82356473	--
(8)	Keyboard	ACER	6311-TW4C	916590704C91F24437	--

Note:

1. The power cord of The device. (1)、(2) 、(5)、(6)are Non-shielded power cord.

	Signal Cable Type	Signal cable Description
A.	VGA Cable*2 Pcs	Shielded, 1.6m, a ferrite core bonded
B.	Keyboard Cable*2 Pcs	Shielded, 1.8m
C.	Mouse Cable*2 Pcs	Shielded, 1.8m
D.	LAN Cable*1 Pc	Non-shielded, 3.0m
E.	LAN Cable*1 Pc	Non-shielded, 3.0m
F.	LAN Cable*3Pcs	Non-shielded, 3.0m

1.3. Configuration of tested System

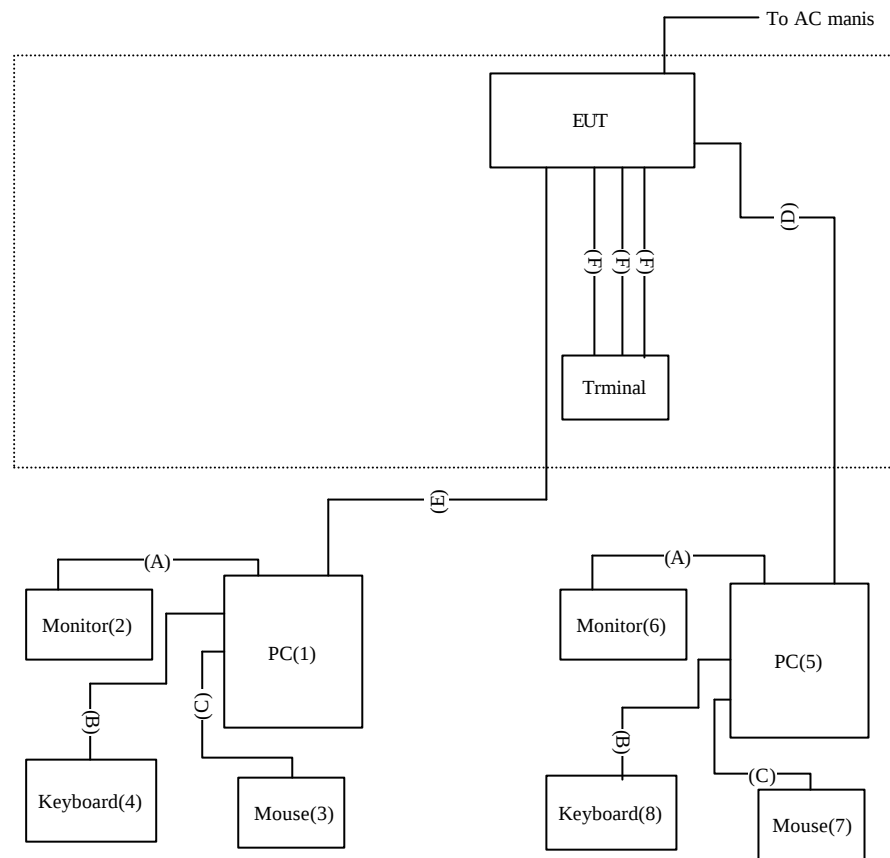

1.4. EUT Exercise Software

- (1) Setup the EUT and simulators as shown on 1.3
- (2) Turn on the power of all equipment.
- (3) Boot the PC from Hard Disk.
- (4) Data will communicate between partner personal computer and partner personal computer through EUT.
- (5) The partner personal computer and partner personal computer monitors' will show the transmitting and receiving characteristics when the communication is success.
- (6) Repeat the above procedure 1.4.4 to 1.4.5

1.5. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: November 3, 1998 File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Reference 31040/SIT1300F2

September 30, 1998 Accreditation on NVLAP
NVLAP Lab Code: 200347-0



Site Name: Quietek Corporation

Site Address: N0.75-1, Wang-Yeh Valley, Yung-Hsing,
Chiung-Lin, Hsin-Chu County,
Taiwa, R.O.C.
TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : service@quietek.com

2. Conducted Emission

2.1. Test Equipment List


The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal..	Remark
1	Test Receiver	R & S	ESCS 30/825442/17	May, 2001	
2	L.I.S.N.	R & S	ESH3-Z5/825016/6	May, 2001	EUT
3	L.I.S.N.	Kyoritsu	KNW-407/8-1420-3	May, 2001	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2	N/A	
5	N0.2 Shielded Room			N/A	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2.2. Test Setup

S

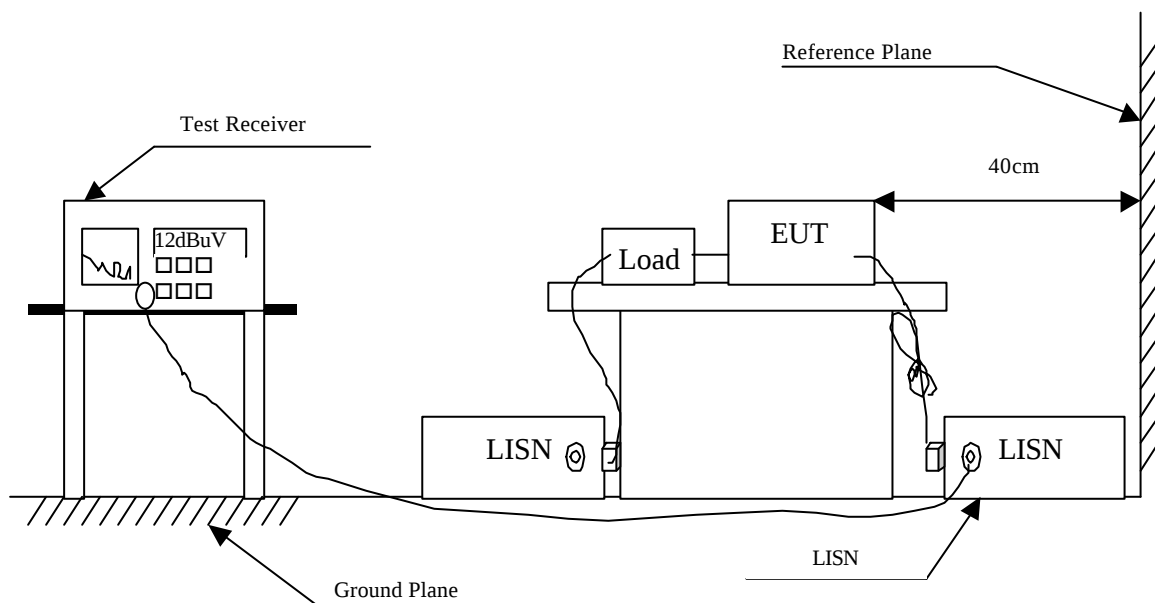

2.3. Limits

CISPR 22 Limits (dBuV)				
Frequency MHz	Class A		Class B	
	QP	AV	QP	AV
0.15 - 0.50	79	66	66-56	56-46
0.50-5.0	73	60	56	46
5.0 - 30	73	60	60	50

Remarks : In the above table, the tighter limit applies at the band edges.

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4:1992 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Test Result

The emission from the EUT was below the specified limits. The worst-case emissions are shown in section 5. The acceptance criterion was met and the EUT passed the test.

3. Radiated Emission


3.1. Test Equipment

The following test equipment are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Site # 1	X	Test Receiver	R & S	ESCS 30 / 825442/14	May, 2001
		Spectrum Analyzer	Advantest	R3261C / 71720140	May, 2001
		Pre-Amplifier	HP	8447D/3307A01812	May, 2001
	X	Bilog Antenna	Chase	CBL6112B / 12452	Sep., 2000
	X	Horn Antenna	EM	EM6917 / 103325	May, 2001
Site # 2	X	Test Receiver	R & S	ESCS 30 / 825442/17	May, 2001
		Spectrum Analyzer	Advantest	R3261C / 71720609	May, 2001
		Pre-Amplifier	HP	8447D/3307A01814	May, 2001
	X	Bilog Antenna	Chase	CBL6112B / 2455	Sep., 2000
	X	Horn Antenna	EM	EM6917 / 103325	May, 2001

- Note:
1. All equipments that need to calibrate are with calibration period of 1 year.
 2. Mark "X" test instruments are used to measure the final test results.

3.2. Test Setup

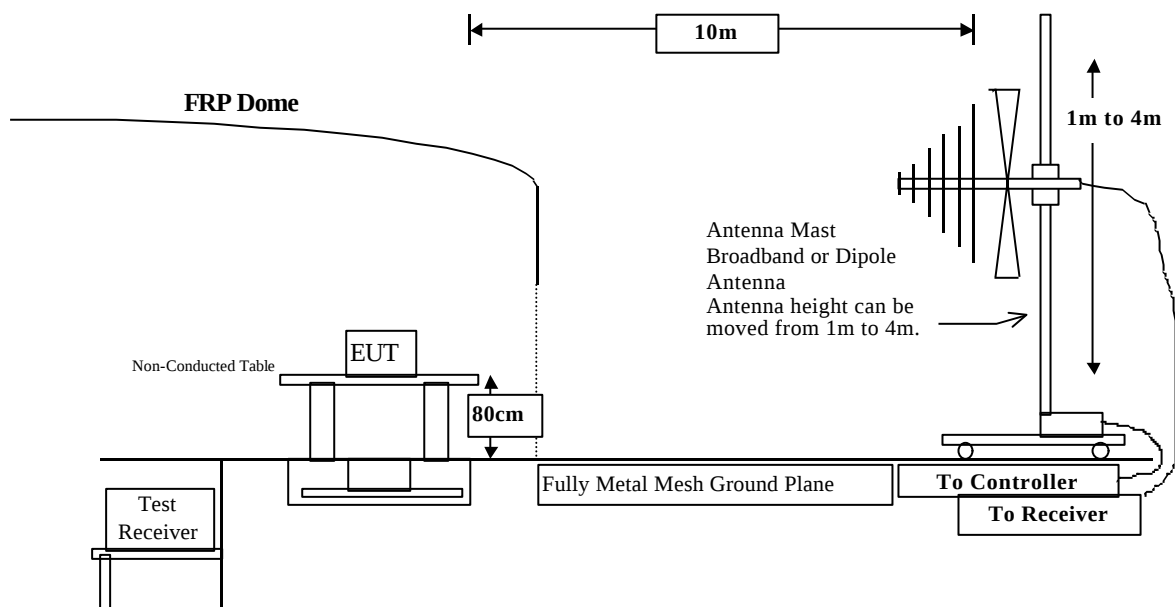

3.3. Limits

CISPR 22 Limits (dBuV)				
Frequency MHz	Class A		Class B	
	Distance (m)	dBuV/m	Distance (m)	dBuV/m
30 – 230	10	40	10	30
230 – 1000	10	47	10	37

Remark: 1. The tighter limit shall apply at the edge between two frequency bands.

2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3. RF Line Voltage (dBuV/m) = 20 log RF Line Voltage (uV/m)

3.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 10 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:1992 on radiated measurement.

Radiated emissions were investigated over the frequency range from 30MHz to 1GHz using a receiver bandwidth of 120kHz. Radiated was performed at an antenna to EUT distance of 10 meters.

3.5. Test Result

The emission from the EUT was below the specified limits. The worst-case emissions are shown in section 5. The acceptance criterion was met and the EUT passed the test.

4. EMI Reduction Method During Compliance Testing

No modification was made during testing.

5. Summary of Test Datas

The test results in the emission was performed according to the requirements of measurement standard and process. Quietek Corporation is assumed full responsibility for the accuracy and completeness of these measurements. The test data of the emission is listed as below.

All the tests were carried out with the EUT in normal operation, which was defined as:

Test Mode:

Conducted Test	Mode 1: 10Mbps
	Mode 2: 100Mbps
Radiated Test	Mode 1: 10Mbps
	Mode 2: 100Mbps

5.1. Test Data of Conducted Emission

Product : IP Sharing + Fast EtherSwitch For Cable/xDSL Modem
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 1: 10Mbps

Frequency MHz	Cable Loss dB	LISN Factor dB	Reading Level dBuV	Measurement Level dBuV	Limits dBuV
=====					
Quasi-Peak					
* 0.216	0.02	0.10	48.73	48.85	62.99
0.582	0.07	0.10	36.71	36.88	56.00
2.455	0.16	0.14	35.82	36.12	56.00
4.308	0.19	0.16	30.05	30.40	56.00
20.000	0.35	0.45	38.29	39.10	60.00
29.084	0.40	0.59	38.52	39.50	60.00
Average					
0.216	0.02	0.10	34.10	34.22	52.97
0.582	0.07	0.10	20.50	20.67	46.00
2.455	0.16	0.14	19.80	20.10	46.00
4.308	0.19	0.16	18.60	18.95	46.00
20.000	0.35	0.45	33.70	34.51	50.00
29.084	0.40	0.59	22.80	23.78	50.00

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable loss.

Product : IP Sharing + Fast EtherSwitch For Cable/xDSL Modem
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 1: 10Mbps

Frequency	Cable	LISN	Reading	Measurement	Limits
MHz	Loss	Factor	Level	Level	
	dB	dB	dBuV	dBuV	dBuV
=====					
Quasi-Peak					
* 0.222	0.02	0.10	50.05	50.17	62.76
0.524	0.07	0.10	37.64	37.81	56.00
2.317	0.15	0.14	37.05	37.34	56.00
10.913	0.29	0.23	41.04	41.56	60.00
14.572	0.32	0.34	37.85	38.51	60.00
29.087	0.40	0.59	40.92	41.90	60.00
Average					
0.222	0.02	0.10	36.40	36.52	52.74
0.524	0.07	0.10	16.30	16.47	46.00
2.317	0.15	0.14	20.00	20.29	46.00
10.913	0.29	0.23	23.90	24.42	50.00
14.572	0.32	0.34	22.10	22.76	50.00
29.087	0.40	0.59	25.30	26.28	50.00

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable loss.

Product : IP Sharing + Fast EtherSwitch For Cable/xDSL Modem
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 2: 100Mbps

Frequency	Cable	LISN	Reading	Measurement	Limits
MHz	Loss	Factor	Level	Level	
	dB	dB	dBuV	dBuV	dBuV
=====					
Quasi-Peak					
* 0.202	0.02	0.10	51.09	51.21	63.55
0.548	0.07	0.10	38.02	38.19	56.00
0.988	0.10	0.10	37.01	37.21	56.00
2.374	0.15	0.14	35.33	35.62	56.00
10.914	0.29	0.23	33.51	34.03	60.00
28.926	0.40	0.58	28.72	29.70	60.00
Average					
0.202	0.02	0.10	36.80	36.92	53.53
0.548	0.07	0.10	24.50	24.67	46.00
0.988	0.10	0.10	19.20	19.40	46.00
2.374	0.15	0.14	18.00	18.29	46.00
10.914	0.29	0.23	19.10	19.62	50.00
28.926	0.40	0.58	22.90	23.88	50.00

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable loss.

Product : IP Sharing + Fast EtherSwitch For Cable/xDSL Modem
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 2: 100Mbps

Frequency	Cable	LISN	Reading	Measurement	Limits
MHz	Loss	Factor	Level	Level	
	dB	dB	dBuV	dBuV	dBuV
=====					
Quasi-Peak					
* 0.203	0.02	0.10	51.77	51.89	63.48
0.512	0.06	0.10	38.46	38.62	56.00
2.496	0.16	0.14	34.66	34.96	56.00
3.660	0.18	0.16	38.59	38.93	56.00
18.172	0.34	0.42	41.69	42.45	60.00
29.004	0.40	0.59	40.50	41.48	60.00
Average					
0.203	0.02	0.10	37.80	37.92	53.49
0.512	0.06	0.10	19.50	19.66	46.00
2.496	0.16	0.14	17.90	18.20	46.00
3.660	0.18	0.16	24.90	25.24	46.00
18.172	0.34	0.42	23.70	24.46	50.00
29.004	0.40	0.59	25.70	26.68	50.00

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable loss.

5.2. Test Data of Radiated Emission

Product : IP Sharing + Fast EtherSwitch For Cable/xDSL Modem
 Test Item : Radiated Emission
 Test Site : No.1 OATS
 Test Mode : Mode 1:10Mbps

Freq.	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
MHz	Loss	Factor	dB	Level	Level	dB	dBuV/m
	dB	dB/m		dBuV	dBuV/m		
=====							
Horizontal							
56.100	1.40	5.73	0.00	9.25	16.38	13.62	30.00
79.745	1.63	8.10	0.00	13.06	22.78	7.22	30.00
159.992	2.40	10.32	0.00	8.58	21.30	8.70	30.00
200.000	2.78	9.30	0.00	7.48	19.56	10.44	30.00
250.000	3.27	12.61	0.00	15.02	30.90	6.10	37.00
374.995	4.14	15.00	0.00	5.48	24.62	12.38	37.00
415.258	4.35	16.47	0.00	5.15	25.98	11.02	37.00
499.992	4.79	17.34	0.00	5.79	27.92	9.08	37.00
*675.247	5.71	19.11	0.00	8.09	32.90	4.10	37.00
Vertical							
* 32.408	1.17	17.49	0.00	10.40	29.06	0.94	30.00
47.798	1.32	8.93	0.00	14.91	25.16	4.84	30.00
62.998	1.47	6.38	0.00	10.48	18.33	11.67	30.00
108.537	1.91	11.15	0.00	7.29	20.34	9.66	30.00
145.258	2.26	10.92	0.00	12.45	25.63	4.37	30.00
155.635	2.35	10.29	0.00	13.50	26.14	3.86	30.00
163.943	2.44	9.77	0.00	11.54	23.75	6.25	30.00
200.000	2.78	9.07	0.00	11.30	23.16	6.84	30.00
250.000	3.27	12.26	0.00	16.34	31.87	5.13	37.00

Note:

1. All Reading Levels below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable loss.

Product : IP Sharing + Fast EtherSwitch For Cable/xDSL Modem
 Test Item : Radiated Emission
 Test Site : No.1 OATS
 Test Mode : Mode 2: 100Mbps

Freq.	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
MHz	Loss	Factor	dB	Level	Level	dB	dBuV/m
	dB	dB/m		dBuV	dBuV/m		

=====

Horizontal

85.533	1.68	8.88	0.00	10.64	21.21	8.79	30.00
110.785	1.93	11.97	0.00	6.09	19.99	10.01	30.00
138.415	2.20	11.29	0.00	8.26	21.75	8.25	30.00
149.895	2.31	10.72	0.00	5.25	18.28	11.72	30.00
159.997	2.40	10.32	0.00	9.96	22.68	7.32	30.00
249.995	3.27	12.61	0.00	14.76	30.64	6.36	37.00
374.992	4.14	15.00	0.00	6.12	25.26	11.74	37.00
499.992	4.79	17.34	0.00	5.71	27.84	9.16	37.00
* 675.253	5.71	19.11	0.00	8.69	33.50	3.50	37.00

Vertical

* 32.650	1.18	15.99	0.00	11.80	28.97	1.03	30.00
50.450	1.35	7.39	0.00	19.27	28.01	1.99	30.00
108.768	1.91	11.15	0.00	13.83	26.88	3.12	30.00
125.000	2.07	11.49	0.00	8.20	21.76	8.24	30.00
143.242	2.24	10.86	0.00	15.53	28.63	1.37	30.00
151.542	2.32	10.58	0.00	13.44	26.34	3.66	30.00
155.635	2.35	10.29	0.00	12.60	25.24	4.76	30.00
250.000	3.27	12.26	0.00	15.32	30.85	6.15	37.00

Note:

1. All Reading Levels below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable loss.

Attachment 1 : EUT Test Photographs

Attachment 2 : EUT Detailed Photographs