



FCC RADIO TEST REPORT

Applicant : XAC Automation Corporation
Address : 4F., NO.30, INDUSTRY E. RD. IX, SCIENCE-BASED
INDUSTRIAL PARK, HSIN-CHU, Taiwan
Equipment : Unattended Android Payment Terminal
Model No. : xCL_AT-100-U-14
Trade Name : XAC
FCC ID : MQT-AT100U14

I HEREBY CERTIFY THAT :

The sample was received on Jun. 05, 2026 and the testing was completed on Jul. 06, 2026 at Cerpass Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of Cerpass Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

Cerpass Technology Corporation Test Laboratory





Contents

1. Summary of Test Procedure and Test Results	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test.....	6
2.1 Feature of Equipment.....	6
2.2 Carrier Frequency of Channels.....	7
2.3 Test Mode and Test Software.....	8
2.4 Description of Test System.....	10
2.5 General Information of Test.....	11
2.6 Measurement Uncertainty	12
3. Test Equipment and Ancillaries Used for Tests.....	13
4. Antenna Requirements.....	14
4.1 Antenna Construction and Directional Gain.....	14
5. Test of AC Power Line Conducted Emission	15
5.1 Test Limit	15
5.2 Test Procedures	15
5.3 Typical Test Setup	16
5.4 Test Result and Data.....	17
5.5 Test Photographs	21
6. Test of Radiated Spurious Emission.....	22
6.1 Test Limit	22
6.2 Test Procedures	23
6.3 Typical Test Setup	23
6.4 Test Result and Data (9kHz ~ 30MHz)	25
6.5 Test Result and Data (30MHz ~ 1GHz)	25
6.6 Test Result and Data (Bandedge).....	29
6.7 Test Result and Data (1GHz ~ 3GHz).....	67
6.8 Test Result and Data (3GHz ~ 18GHz).....	91
6.9 Test Result and Data (18GHz ~ 25GHz).....	139
6.10 Restricted Bands of Operation	141
6.11 Test Photographs (30MHz ~ 1GHz)	142
6.12 Test Photographs (1GHz ~ 25GHz)	143
7. Test of Conducted Spurious Emission.....	145
7.1 Test Limit	145
7.2 Test Procedure	145
7.3 Test Setup Layout	145
7.4 Test Result and Data.....	145
8. On Time, Duty Cycle and Measurement methods	150
8.1 Test Limit	150
8.2 Test Procedure	150
8.3 Test Setup Layout	150
8.4 Test Result and Data.....	150
9. 6dB Bandwidth Measurement Data.....	152



9.1	Test Limit	152
9.2	Test Procedures	152
9.3	Test Setup Layout	152
9.4	Test Result and Data.....	153
10.	Maximum Peak Output Power	156
10.1	Test Limit	156
10.2	Test Procedures	156
10.3	Test Setup Layout	156
10.4	Test Result and Data.....	157
11.	Power Spectral Density	158
11.1	Test Limit	158
11.2	Test Procedures	158
11.3	Test Setup Layout	158
11.4	Test Result and Data.....	159



History of this test report

Report No.	Issued Date	Description
26050490-TRDFCC01	Jul. 15, 2026	Original



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024

FCC Rules and Regulations Part 15 Subpart C § 15.247

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	PASS
15.207	. AC Power Line Conducted Emission	PASS
15.209 15.205	. Radiated Spurious Emission	PASS
15.247(d)	. Conducted Spurious Emission	PASS
15.247(a)(2)	. 6dB Bandwidth	PASS
15.247(b)	. Maximum Peak and Average Output Power	PASS
15.247(e)	. Power Spectral Density	PASS

*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement, measurement uncertainty evaluation is not considered.



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment

Equipment	Unattended Android Payment Terminal
Model Name	xCL_AT-100-U-14
Model Discrepancy	N/A
Frequency Range	BT / BLE/ Wi-Fi 2.4GHz: 2400MHz-2483.5MHz Wi-Fi 5GHz: 5150MHz-5250MHz, 5725MHz -5850MHz NFC: 13.56MHz
Modulation Type	BT: GFSK, $\pi/4$ -DQPSK, 8DPSK BLE: GFSK Wi-Fi 2.4GHz: 802.11b: CCK, DQPSK, DBPSK 802.11g/n: BPSK, QPSK, 16QAM, 64QAM Wi-Fi 5GHz: 802.11a/n: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM NFC: Type-A: OOK, Type-B: ASK
Data Rate	BT: GFSK: 1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK: 3Mbps BLE: GFSK: 1Mbps, 2Mbps, 125kbps, 500kbps Wi-Fi 2.4GHz: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0-MCS7, HT20/HT40 Wi-Fi 5GHz: 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0-MCS7, HT20/HT40 802.11ac: MCS0-MCS9, VHT20/40/80
Working Temperature	-30°C to 70°C
EUT Power Rating:	INPUT: 12V $\overline{\text{---}}$ 2A (by adapter) or 20-42.5V DC (by MDB)

Note: For more details, please refer to the User's manual of the EUT.



2.2 Carrier Frequency of Channels

802.11b, 802.11g, 802.11n HT20

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	*11	2462
*06	2437	---	---

802.11n HT40

Channel	Frequency(MHz)	Channel	Frequency(MHz)
---	---	07	2442
---	---	08	2447
*03	2422	*09	2452
04	2427	---	---
05	2432	---	---
*06	2437	---	---

Note: Channels remarked * are selected to perform test.



2.3 Test Mode and Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.10
- The complete test system included support units and EUT for RF test.
- An executive program, "EngineerMode.app (Ver.: 4.4.104)" under Android system was executed to transmit and receive data via Wireless.
- The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	802.11b (1Mbps) for AC120V by adapter
2	802.11g (6Mbps) for AC120V by adapter
3	802.11n HT20 (6.5Mbps) for AC120V by adapter
4	802.11n HT40 (13.5Mbps) for AC120V by adapter
5	802.11g (6Mbps) for AC120V by MDB
6	802.11g (6Mbps) for AC240V by adapter
caused "Test Mode 2,5 at CH1:2412" generated the worst case, it was reported as the final data.	
Radiated emission (Below 1GHz)	
Test Mode	Operating Description
1	802.11b (1Mbps) by adapter
2	802.11g (6Mbps) by adapter
3	802.11n HT20 (6.5Mbps) by adapter
4	802.11n HT40 (13.5Mbps) by adapter
5	802.11g (6Mbps) by MDB
caused "Test Mode 2,5 at CH1:2412" generated the worst case, it was reported as the final data.	
Radiated emission (1GHz ~ 25GHz)	
1	802.11b (1Mbps)
2	802.11g (6Mbps)
3	802.11n HT20 (6.5Mbps)
4	802.11n HT40 (13.5Mbps)
caused "Test Mode 1~4" generated the worst case, it was reported as the final data.	

Modulation Type	TX CONFIGURATION
802.11b	1TX
802.11g	1TX
802.11n HT20	1TX
802.11n HT40	1TX



(For Above 1GHz)

Below test Channel generated the worst case, they were reported as the final data.

Modulation Type	Channel	Frequency (MHz)	Bandedge		1GHz~3GHz		3GHz~18GHz		18GHz~25GHz	
			Ver PK/AV	Hor PK/AV	Ver PK/AV	Hor PK/AV	Ver PK/AV	Hor PK/AV	Ver PK/AV	Hor PK/AV
802.11b	01	2412	V	V	V	V	V	V		
	06	2437	V	V	V	V	V	V		
	11	2462	V	V	V	V	V	V		
802.11g	01	2412	V	V	V	V	V	V	V	V
	06	2437	V	V	V	V	V	V		
	11	2462	V	V	V	V	V	V		
802.11n HT20	01	2412	V	V	V	V	V	V		
	06	2437	V	V	V	V	V	V		
	11	2462	V	V	V	V	V	V		
802.11n HT40	03	2422	V	V	V	V	V	V		
	06	2437	V	V	V	V	V	V		
	09	2452	V	V	V	V	V	V		



2.4 Description of Test System

AC Power Line Conducted Emission& Radiated Emissions (Below 1G)					
Equipment	Brand	Model	Serial No	Length/Type	Power cord/Length/Type
Adapter	CWT	2AAF042F	332-10622-01	N/A	N/A
MDB-Transverter	Waferstar	MDB-RS232	N/A	0.3m/NS	N/A
Adapter	DELTA	ADP-120XH B	N/A	1.5m/NS	N/A
Radiated Emissions (Above 1G) / RF Conducted					
Adapter	CWT	2AAF042F	332-10622-01	N/A	N/A

**2.5 General Information of Test**

Organization	CerpPASS Technology Corp.		
☒ Test Site	CerpPASS Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel: +886-3-3226-888 Fax: +886-3-3226-881		
	FCC	TW1439, TW1079	
	IC	4934E-1, 4934E-2	
Frequency Range Investigated	Conducted: from 150kHz to 30 MHz Radiation: from 9 kHz to 25,000MHz		
Test Distance	The test distance of radiated emission from antenna to EUT is 3 M.		

Test Item	Test Site	Test period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2026/07/06	24.1°C / 57%	Leon Huang
Radiated Emissions	3M03-NK	2026/06/20~2026/06/26	19.9~23.6°C / 58~65%	Leon Huang
AC Power Line Conducted Emission	CON02-NK	2026/06/26	20.9°C / 68%	Leon Huang



2.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Item	Uncertainty
AC Power Line Conduction(150kHz~30MHz)	±3.2dB
Radiated Spurious Emission(9kHz~30MHz)	±3.4dB
Radiated Spurious Emission(30MHz~1GHz)	±5.2dB
Radiated Spurious Emission(1GHz~25GHz)	±5.2dB
Conducted Spurious Emission	±2.1dB
6dB Bandwidth	±4.4%
20dB Bandwidth	±4.5%
Occupied Bandwidth	±4.4%
Peak Output Power(Conducted Power Meter)	±1.1dB
Dwell Time / Deactivation Time	±3.5%
Power Spectral Density	±2.0dB
Duty Cycle	±3.5%



3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M03-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Sunol	JB1	A020514-1	2025/09/08	2026/09/07
Active Loop Antenna	Schwarzbeck	FMZB 1513	00414	2026/02/04	2027/02/03
Horn Antenna	EMCO	3116	31974	2025/10/07	2026/10/06
Horn Antenna	EMCO	3115	00031589	2026/03/11	2027/03/10
Spectrum Analyzer 44GHz	ROHDE & SCHWARZ	FSV3044	101744	2026/04/01	2027/03/31
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2025/07/10	2026/07/09
Preamplifier	EMC INSTRUMENTS	EMC118A45V1S EE	981070	2026/04/02	2027/04/01
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2025/10/13	2026/10/12
Preamplifier	EM Electronics corp.	EM330	060611	2026/03/17	2027/03/16
Cable-4m(9k-3G)	EMEC	RG-223	18274M	2025/07/02	2026/07/01
Cable-0.5m(1G-18G)	HUBER SUHNER	SUCOFLEX 104	805443/4	2026/03/09	2027/03/08
Cable-3m(1G-18G)	HUBER SUHNER	SUCOFLEX 104	805796/4	2026/03/09	2027/03/08
Cable-3m(10M-40G)	HUBER SUHNER	SF102	804619/2	2025/10/13	2026/10/12
Cable-1m(10M-40G)	HUBER SUHNER	SF102	804398/2	2025/10/13	2026/10/12
Cable-8m(1G-26.5G)	WOKEN	WCBA-WCA203 SM	CCE1374	2026/03/09	2027/03/08
Cable-4m(30M-1G)	HUBER SUHNER	RG-214	02953M	2025/07/11	2026/07/10
Cable-1m(30M-1G)	HUBER SUHNER	RG-214	05094M	2025/07/11	2026/07/10
Cable-9m(30M-1G)	HUBER SUHNER	RG-214	00402M	2025/07/11	2026/07/10
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA
High Pass Filter	Warison	WFIL-H3000-18 000F-03	WR377WC2B1	2025/10/15	2026/10/14
Highpass Filter	WOKEN	WFIL-H7000-18 000F-01	WR377WC2B2	2025/10/15	2026/10/14

Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EXA Signal Analyzer	KEYSIGHT	N9010A	MY54200207	2026/04/01	2027/03/30
Attenuator	AGILENT	8491B	MY39250703	2026/01/29	2027/01/28
Power Meter	Anritsu	ML2495A	1224005	2026/01/27	2027/01/26
Power Sensor	Anritsu	MA2411B	1207295	2026/01/27	2027/01/26

Test Item	AC Power Line Conducted Emission				
Test Site	CON02-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2025/07/10	2026/07/09
Two-Line V-Network	ROHDE & SCHWARZ	ENV216	102185	2025/08/28	2026/08/27
Two-Line V-Network	ROHDE & SCHWARZ	ENV216	101584	2026/01/15	2027/01/14
Cable-4m(9k-3G)	EMEC	RG-223	18274M	2025/07/02	2026/07/01
E3	AUDIX	v8.2014-8-6	RK-000536	NA	NA



4. Antenna Requirements

4.1 Antenna Construction and Directional Gain

Antenna Type	FPC Antenna
Antenna Gain	0.79dBi



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 kHz, according to the methods defined in ANSI C63.10-2020+Cor.1-2023 and ANSI C63.10a-2024. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




5.3 Typical Test Setup

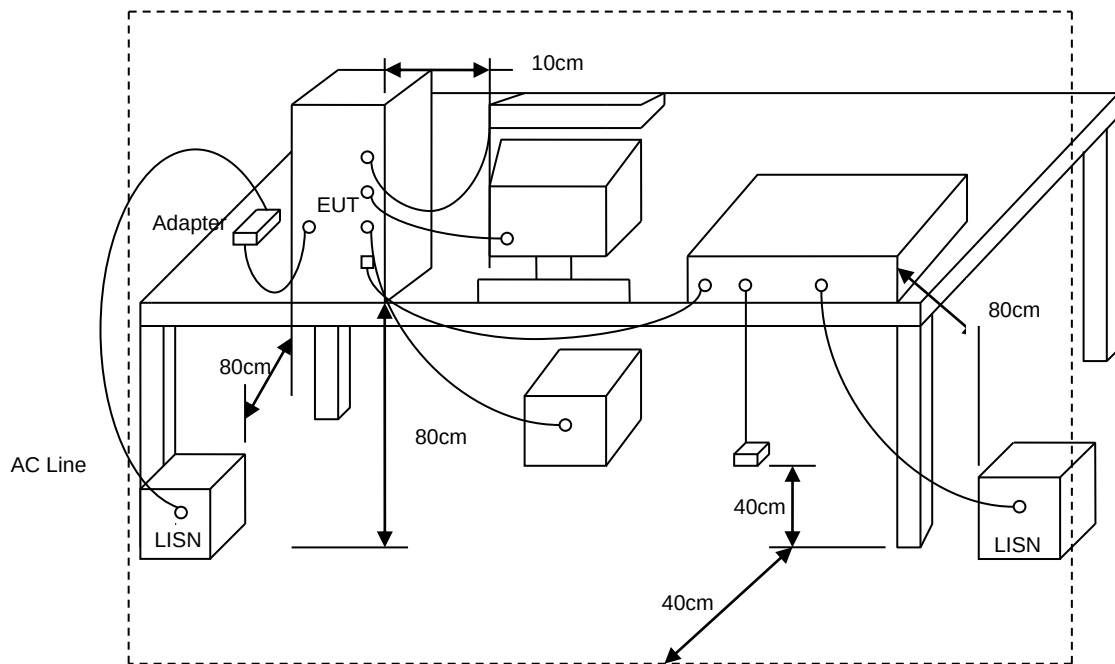



5.4 Test Result and Data

Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	LINE
Test Mode	:	Mode 2		:	

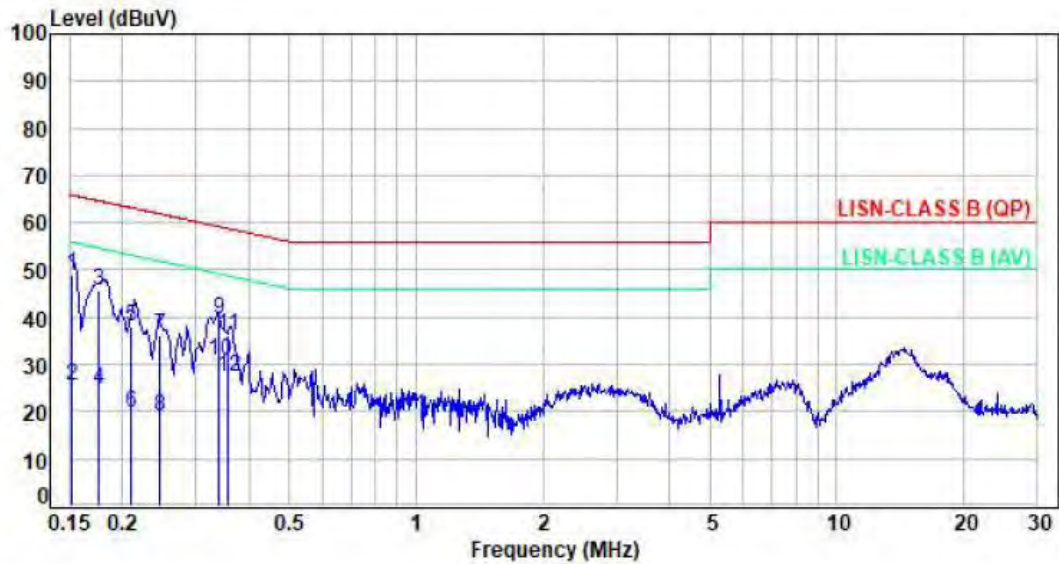

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1520	9.78	39.09	48.87	65.89	-17.02	QP	P
2	0.1520	9.78	15.56	25.34	55.89	-30.55	Average	P
3	0.1756	9.79	35.97	45.76	64.69	-18.93	QP	P
4	0.1756	9.79	14.94	24.73	54.69	-29.96	Average	P
5	0.2098	9.79	28.18	37.97	63.21	-25.24	QP	P
6	0.2098	9.79	10.14	19.93	53.21	-33.28	Average	P
7	0.2455	9.79	26.19	35.98	61.91	-25.93	QP	P
8	0.2455	9.79	9.08	18.87	51.91	-33.04	Average	P
9	0.3388	9.79	29.94	39.73	59.23	-19.50	QP	P
10	0.3388	9.79	20.98	30.77	49.23	-18.46	Average	P
11	0.3563	9.79	26.38	36.17	58.82	-22.65	QP	P
12	0.3563	9.79	17.44	27.23	48.82	-21.59	Average	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	NEUTRAL
Test Mode	:	Mode 2		:	

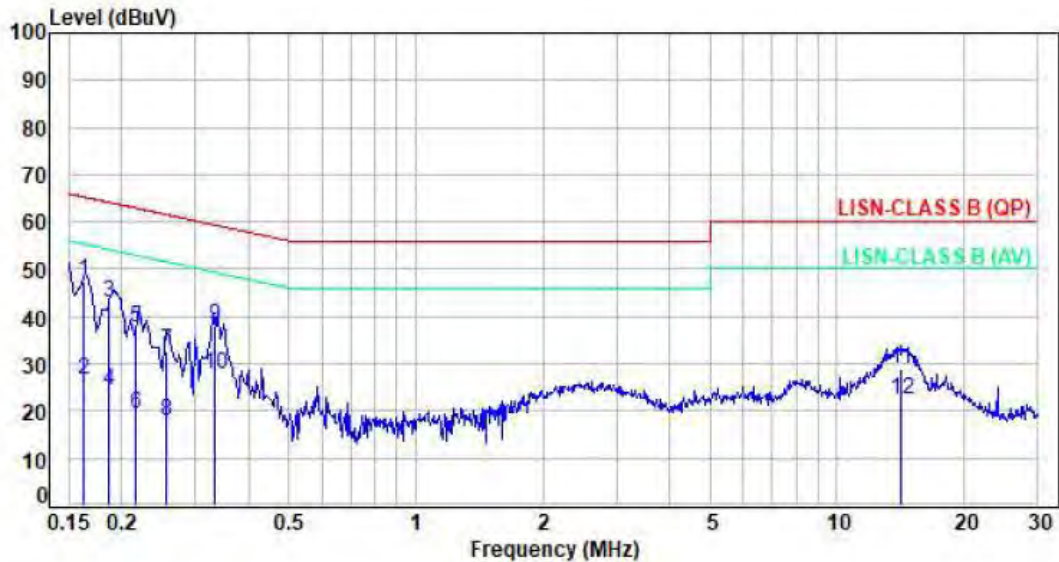

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1619	9.79	37.65	47.44	65.37	-17.93	QP	P
2	0.1619	9.79	17.01	26.80	55.37	-28.57	Average	P
3	0.1859	9.80	33.17	42.97	64.22	-21.25	QP	P
4	0.1859	9.80	14.54	24.34	54.22	-29.88	Average	P
5	0.2162	9.80	28.02	37.82	62.96	-25.14	QP	P
6	0.2162	9.80	9.59	19.39	52.96	-33.57	Average	P
7	0.2562	9.80	22.97	32.77	61.56	-28.79	QP	P
8	0.2562	9.80	8.14	17.94	51.56	-33.62	Average	P
9	0.3346	9.80	28.05	37.85	59.34	-21.49	QP	P
10	0.3346	9.80	18.05	27.85	49.34	-21.49	Average	P
11	14.1630	10.13	18.75	28.88	60.00	-31.12	QP	P
12	14.1630	10.13	12.48	22.61	50.00	-27.39	Average	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power	:	DC 24V by MDB From Adapter (AC 120V/60Hz)	Pol/Phase	:	LINE
Test Mode	:	Mode 5		:	

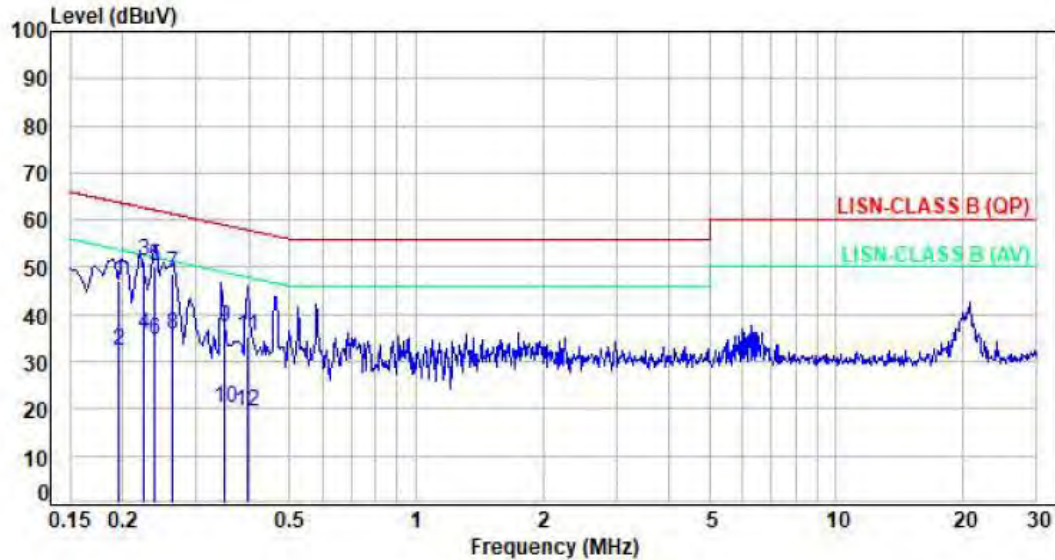

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1958	9.79	37.40	47.19	63.79	-16.60	QP	P
2	0.1958	9.79	22.70	32.49	53.79	-21.30	Average	P
3	0.2250	9.79	41.51	51.30	62.63	-11.33	QP	P
4	0.2250	9.79	26.06	35.85	52.63	-16.78	Average	P
5	0.2390	9.79	40.42	50.21	62.13	-11.92	QP	P
6	0.2390	9.79	24.65	34.44	52.13	-17.69	Average	P
7	0.2631	9.79	38.89	48.68	61.33	-12.65	QP	P
8	0.2631	9.79	25.96	35.75	51.33	-15.58	Average	P
9	0.3509	9.79	27.54	37.33	58.94	-21.61	QP	P
10	0.3509	9.79	10.26	20.05	48.94	-28.89	Average	P
11	0.3956	9.79	25.74	35.53	57.95	-22.42	QP	P
12	0.3956	9.79	9.47	19.26	47.95	-28.69	Average	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power	:	DC 24V by MDB From Adapter (AC 120V/60Hz)	Pol/Phase	:	NEUTRAL
Test Mode	:	Mode 5		:	

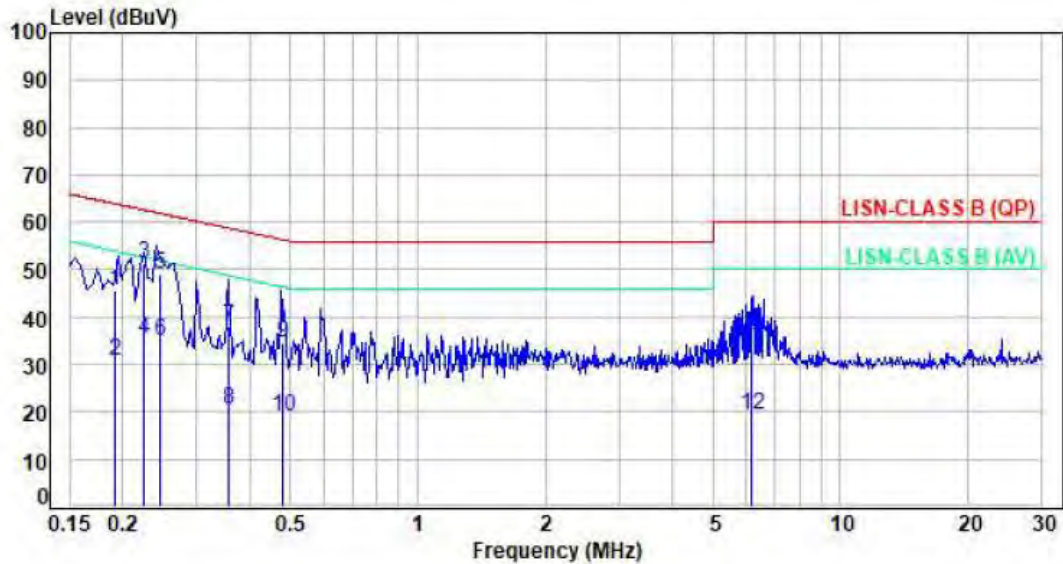

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Detector	P/F
1	0.1920	9.80	35.90	45.70	63.95	-18.25	QP	P
2	0.1920	9.80	21.09	30.89	53.95	-23.06	Average	P
3	0.2258	9.80	41.49	51.29	62.60	-11.31	QP	P
4	0.2258	9.80	25.49	35.29	52.60	-17.31	Average	P
5	0.2460	9.80	39.29	49.09	61.89	-12.80	QP	P
6	0.2460	9.80	25.16	34.96	51.89	-16.93	Average	P
7	0.3556	9.80	28.05	37.85	58.83	-20.98	QP	P
8	0.3556	9.80	10.88	20.68	48.83	-28.15	Average	P
9	0.4805	9.80	24.89	34.69	56.33	-21.64	QP	P
10	0.4805	9.80	9.24	19.04	46.33	-27.29	Average	P
11	6.1392	9.93	23.75	33.68	60.00	-26.32	QP	P
12	6.1392	9.93	9.55	19.48	50.00	-30.52	Average	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



6. Test of Radiated Spurious Emission

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3



6.2 Test Procedures


- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.

Note:


The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.(X AXIS is the worst.)

6.3 Typical Test Setup


Below 30MHz test setup

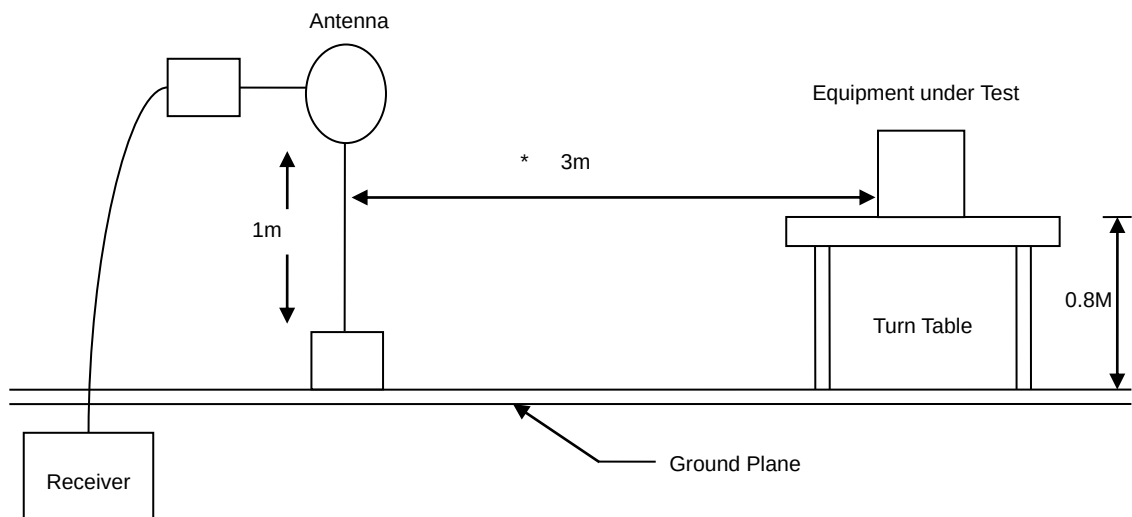

30MHz- 1GHz Test Setup

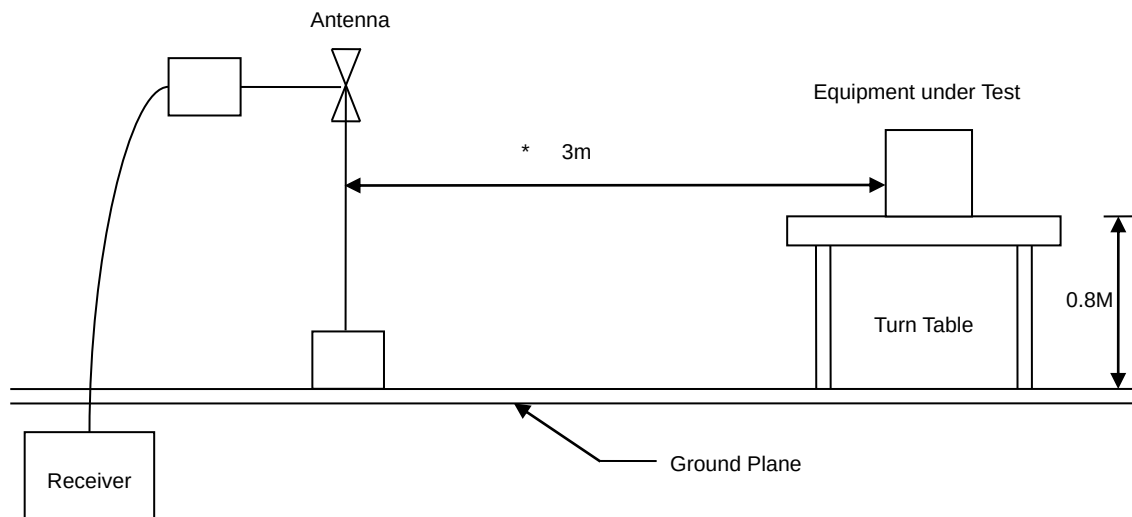

Above 1GHz Test Setup

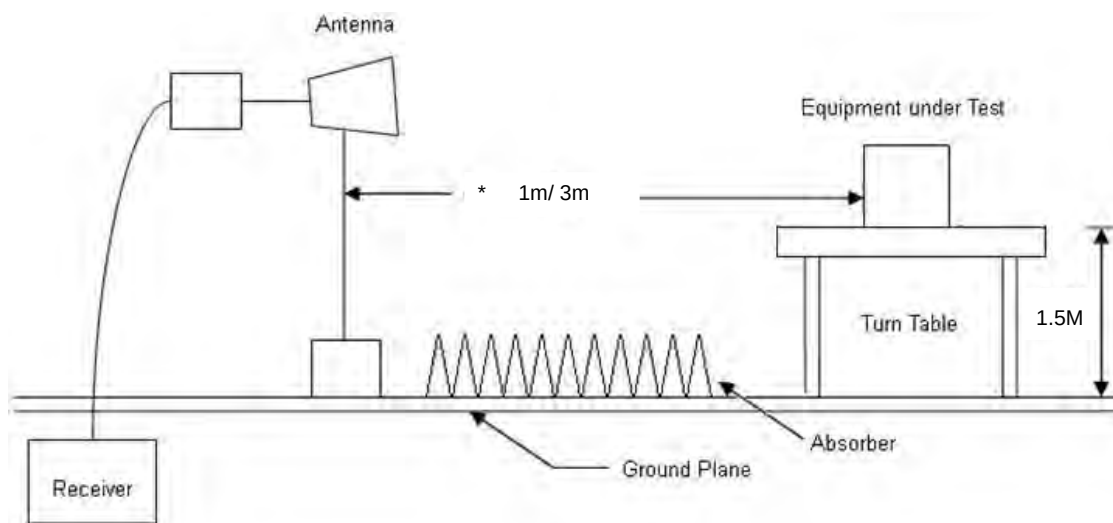




6.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)

Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 2		:	

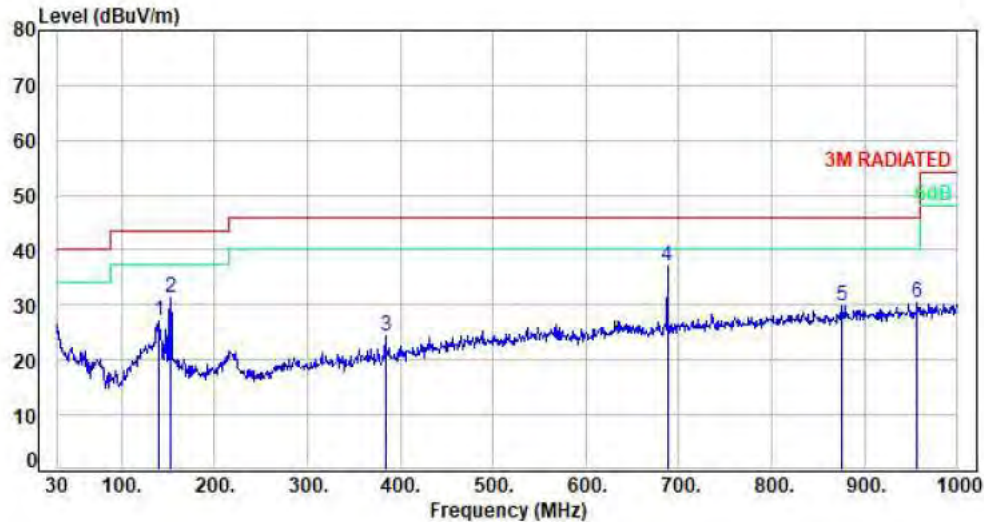

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	140.58	-9.04	36.02	26.98	43.50	-16.52	Peak	100	25	P
2	152.22	-9.74	41.21	31.47	43.50	-12.03	Peak	100	77	P
3	384.05	-6.36	30.74	24.38	46.00	-21.62	Peak	100	345	P
4	687.66	-0.57	37.80	37.23	46.00	-8.77	Peak	100	35	P
5	875.84	2.38	27.56	29.94	46.00	-16.06	Peak	100	7	P
6	957.32	3.40	27.09	30.49	46.00	-15.51	Peak	100	151	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2		:

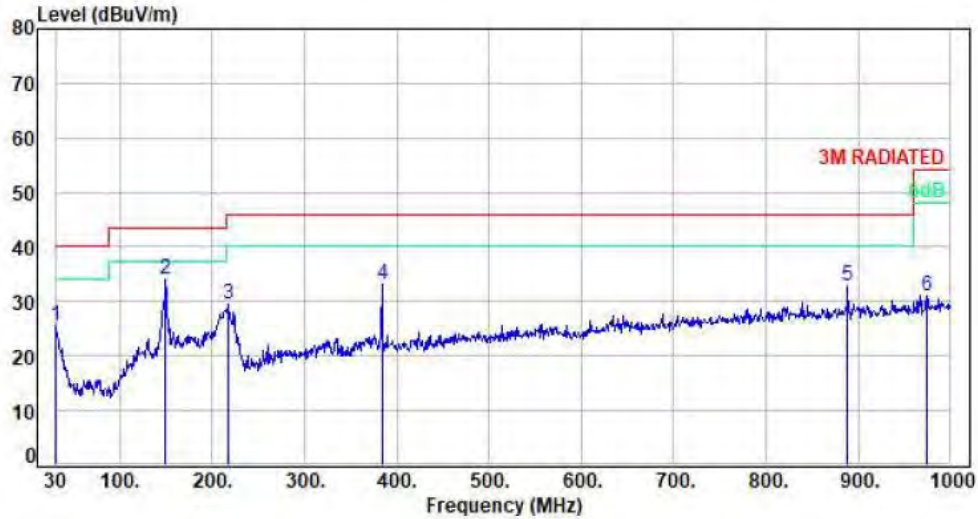


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	30.00	-2.95	28.36	25.41	40.00	-14.59	Peak	100	160	P
2	149.31	-9.59	43.80	34.21	43.50	-9.29	Peak	100	90	P
3	218.18	-11.31	40.87	29.56	46.00	-16.44	Peak	100	293	P
4	384.05	-6.36	39.57	33.21	46.00	-12.79	Peak	100	270	P
5	888.45	2.59	30.14	32.73	46.00	-13.27	Peak	100	249	P
6	973.81	3.43	27.62	31.05	54.00	-22.95	Peak	100	336	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 24V by MDB From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 5		:	

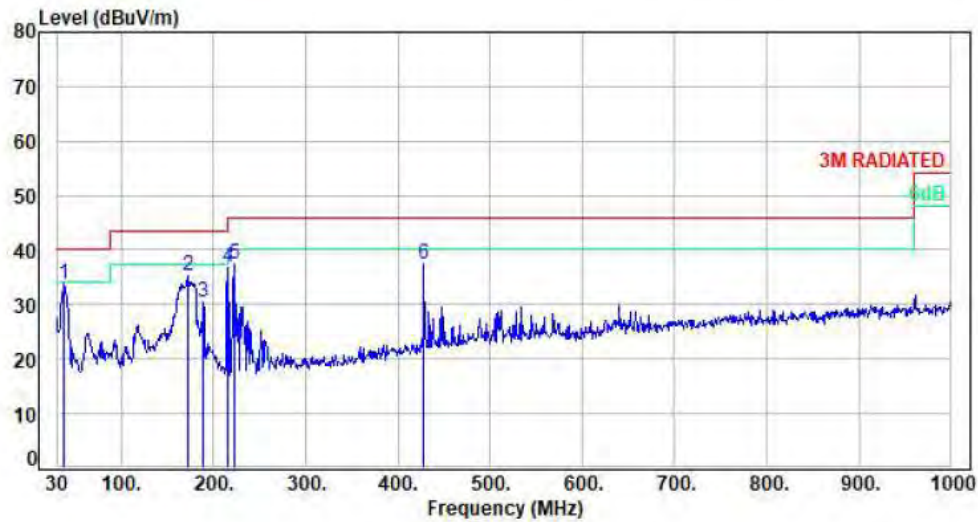


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	37.76	-8.46	42.33	33.87	40.00	-6.13	Peak	100	359	P
2	171.62	-10.50	45.85	35.35	43.50	-8.15	Peak	100	183	P
3	189.08	-10.76	41.14	30.38	43.50	-13.12	Peak	100	238	P
4	215.27	-11.37	48.06	36.69	43.50	-6.81	Peak	100	56	P
5	222.06	-11.23	48.52	37.29	46.00	-8.71	Peak	100	113	P
6	428.67	-4.92	42.28	37.36	46.00	-8.64	Peak	100	188	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 24V by MDB From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 5		:	

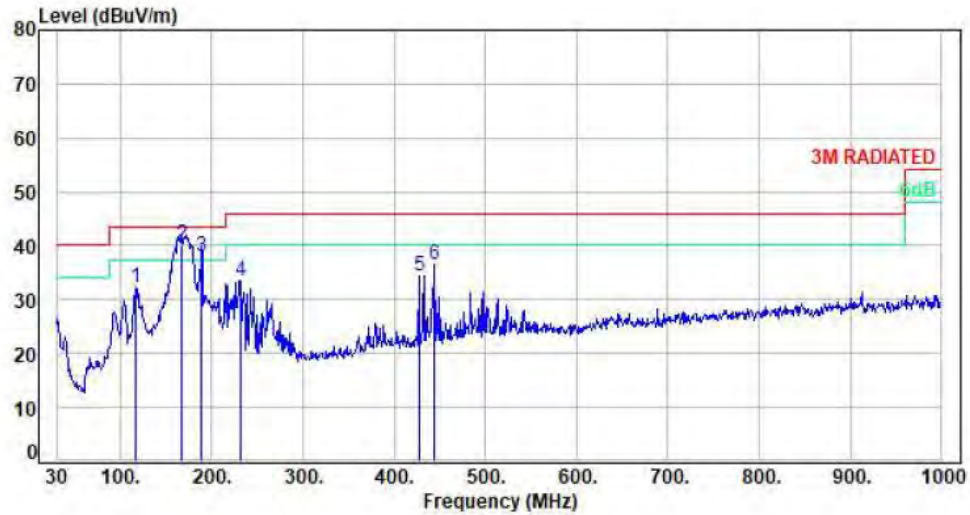


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	116.33	-8.78	41.11	32.33	43.50	-11.17	Peak	100	231	P
2	167.74	-10.25	50.35	40.10	43.50	-3.40	QP	100	192	P
3	189.08	-10.76	48.74	37.98	43.50	-5.52	QP	100	189	P
4	231.76	-10.74	44.22	33.48	46.00	-12.52	Peak	100	178	P
5	427.70	-4.95	39.23	34.28	46.00	-11.72	Peak	100	32	P
6	444.19	-4.29	40.76	36.47	46.00	-9.53	Peak	100	178	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



6.6 Test Result and Data (Bandedge)

Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH01			

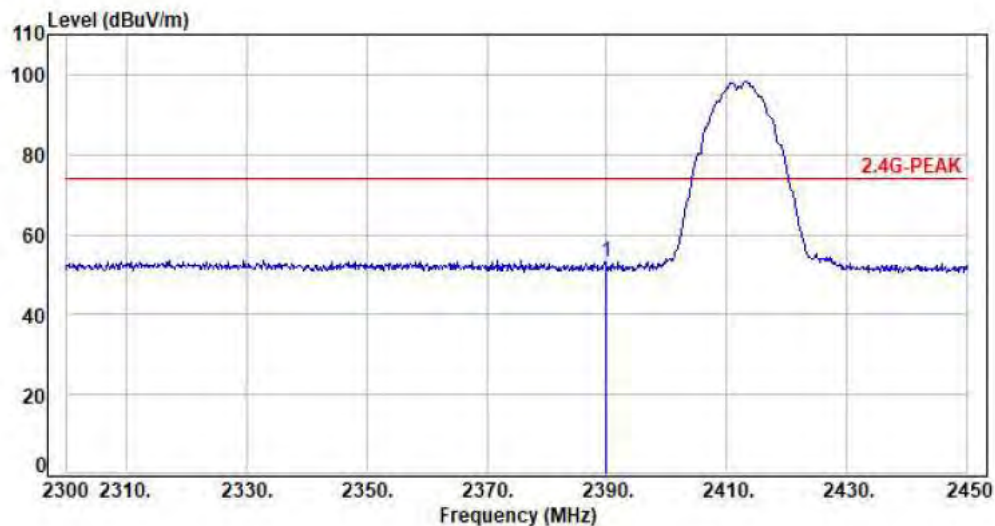

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-4.20	57.31	53.11	74.00	-20.89	Peak	100	157	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, CH01			

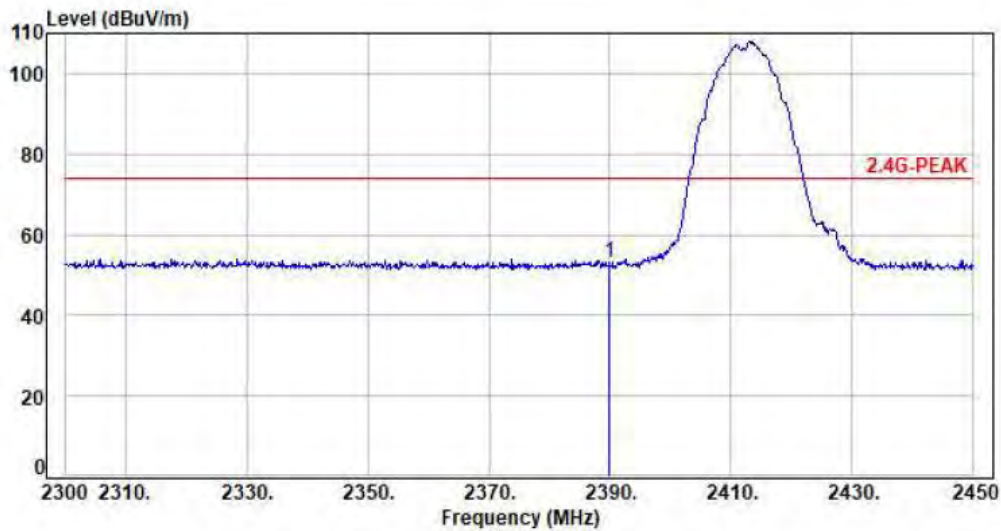


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-4.20	57.27	53.07	74.00	-20.93	Peak	100	243	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH06			

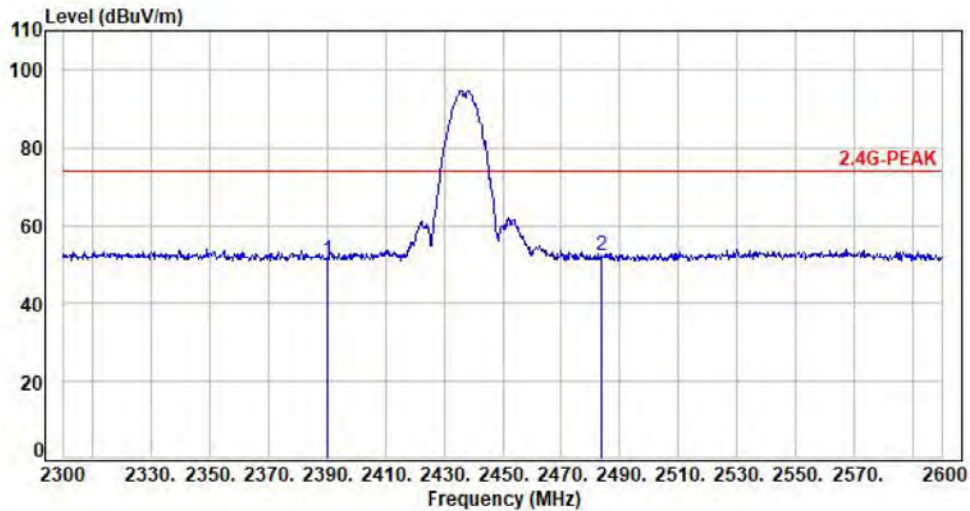

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-4.20	55.33	51.13	74.00	-22.87	Peak	100	98	P
2	2483.50	-3.88	56.30	52.42	74.00	-21.58	Peak	100	104	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, CH06			

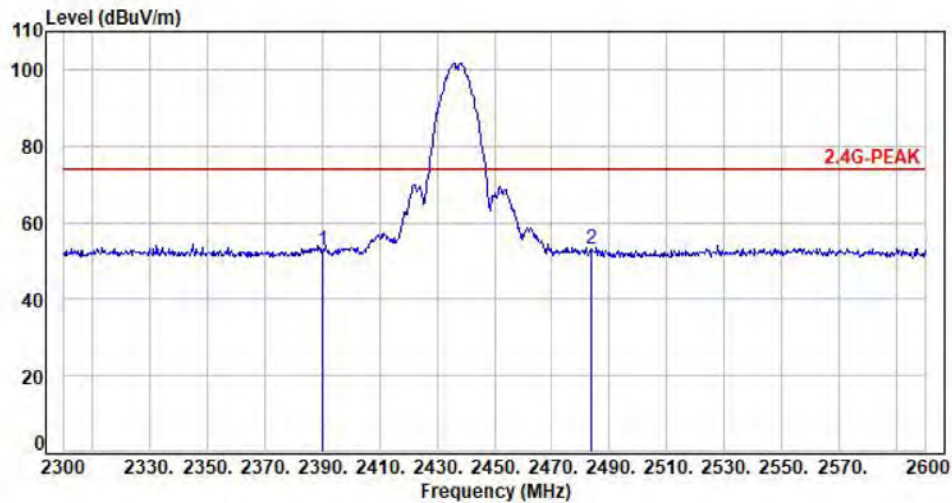

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-4.20	56.77	52.57	74.00	-21.43	Peak	100	334	P
2	2483.60	-3.88	56.93	53.05	74.00	-20.95	Peak	100	101	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH11		:	

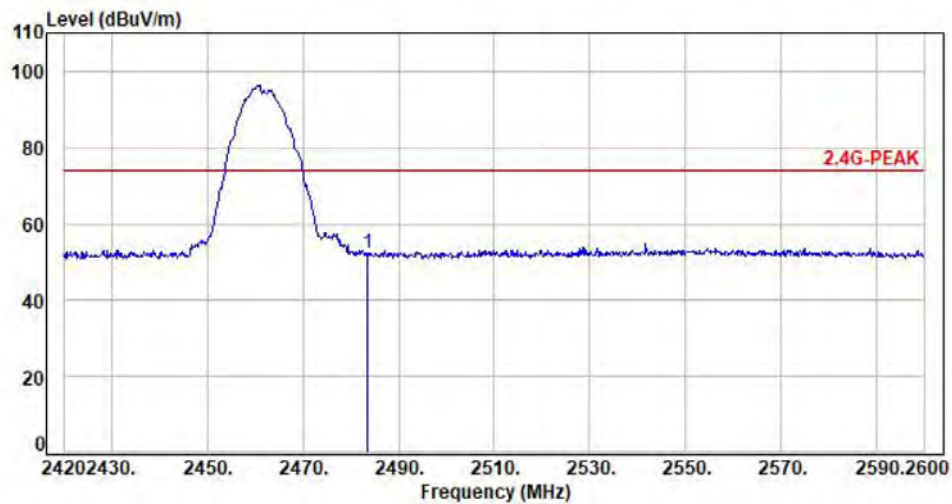

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.54	-3.88	56.13	52.25	74.00	-21.75	Peak	100	74	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, CH11			

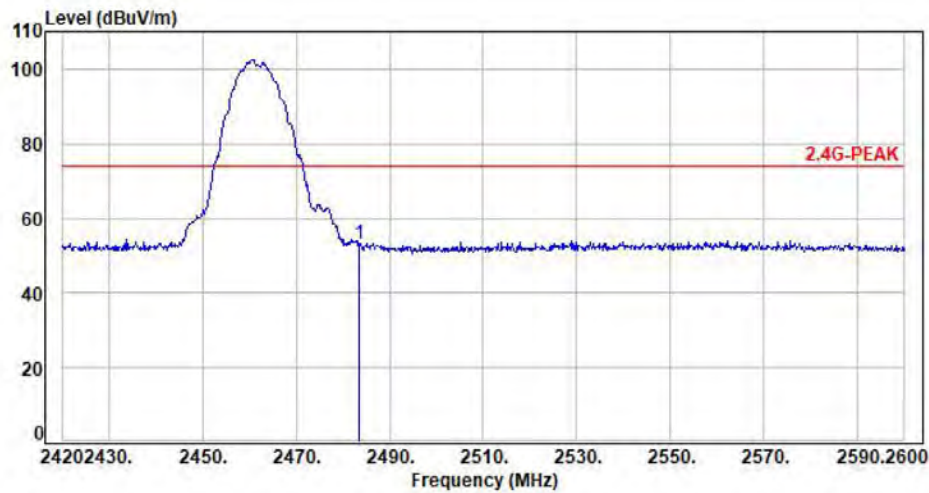

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.54	-3.88	56.82	52.94	74.00	-21.06	Peak	100	51	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 2, CH01	Detector	:	Peak

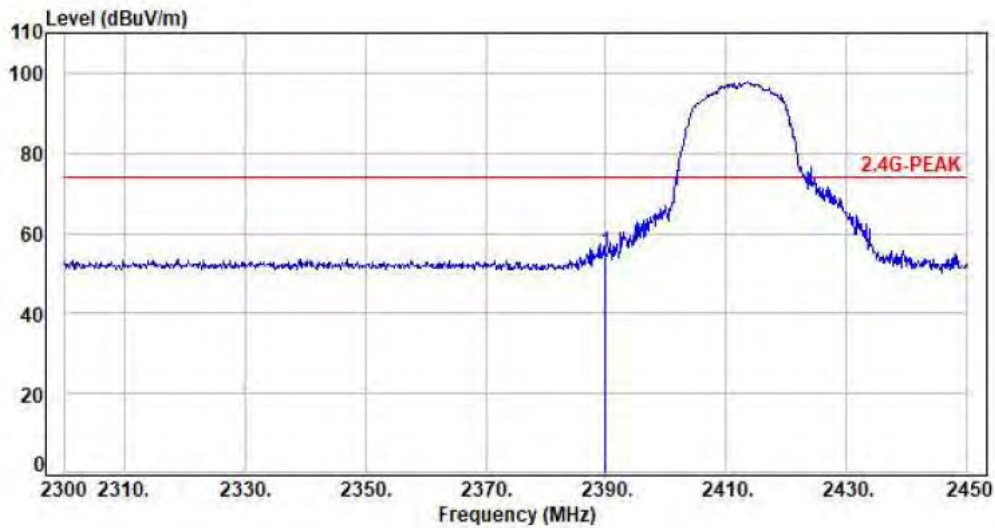


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-4.20	59.46	55.26	74.00	-18.74	Peak	100	146	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 2, CH01	Detector	:	Average

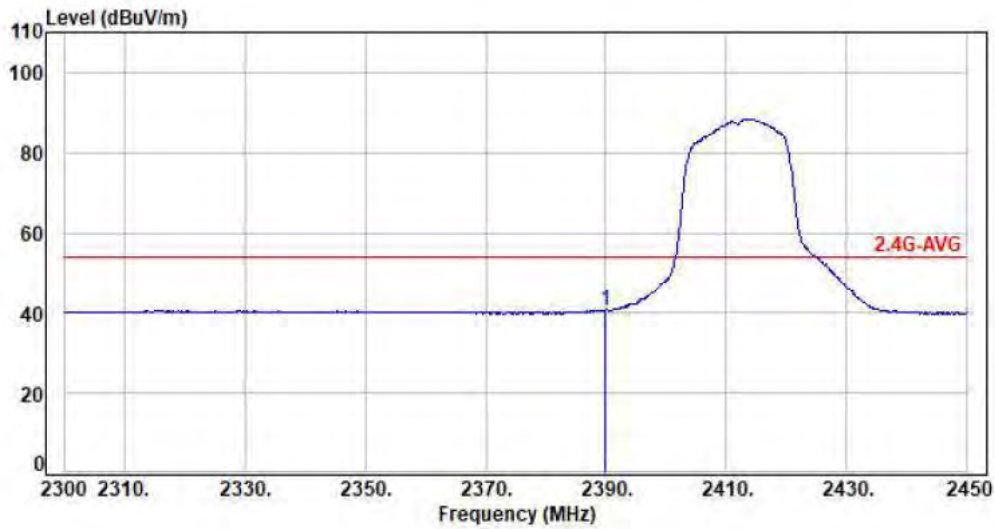


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-4.20	44.93	40.73	54.00	-13.27	Average	100	250	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 2, CH01	Detector	:	Peak

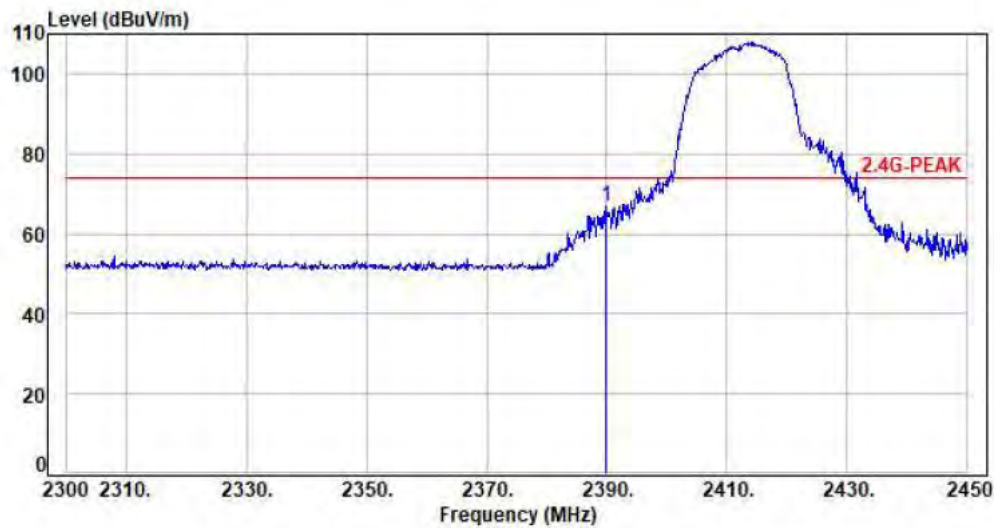

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-4.20	71.16	66.96	74.00	-7.04	Peak	100	57	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 2, CH01	Detector	:	Average

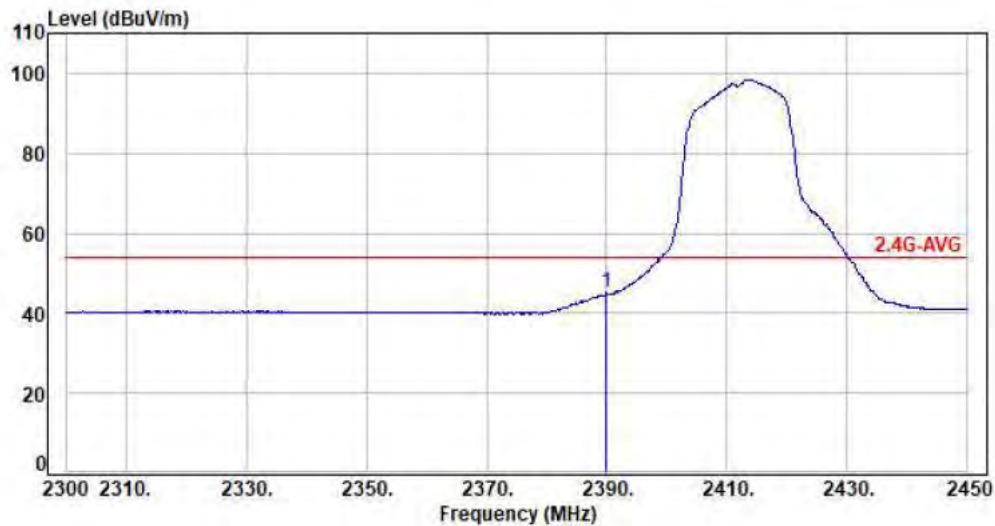


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-4.20	49.24	45.04	54.00	-8.96	Average	100	286	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 2, CH06			

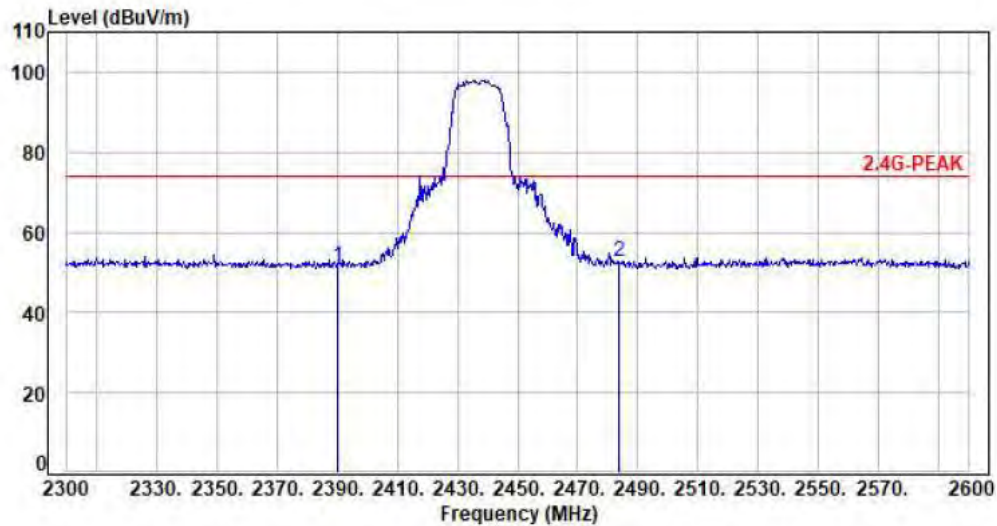


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-4.20	55.72	51.52	74.00	-22.48	Peak	100	31	P
2	2483.60	-3.88	56.37	52.49	74.00	-21.51	Peak	100	204	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 2, CH06			

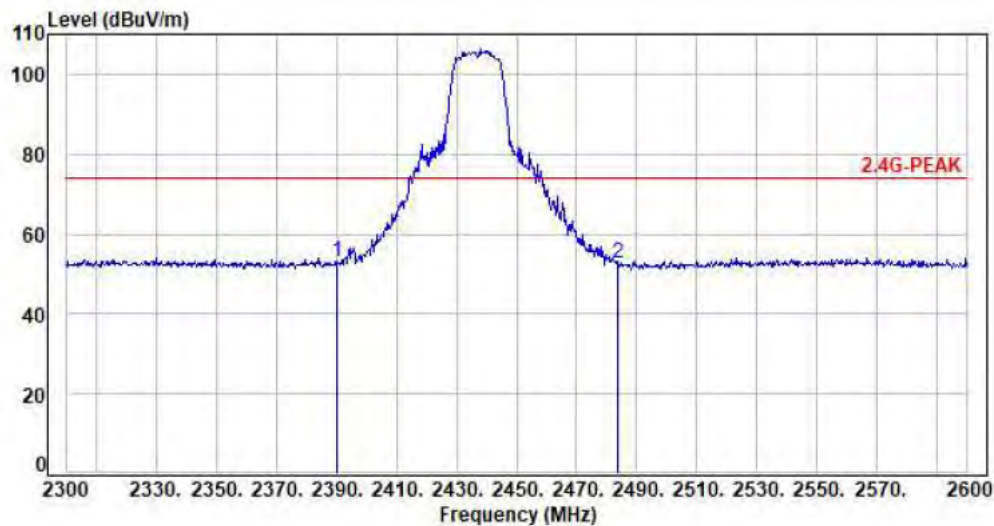


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-4.20	57.12	52.92	74.00	-21.08	Peak	100	244	P
2	2483.60	-3.88	56.43	52.55	74.00	-21.45	Peak	100	186	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 2, CH11	Detector	:	Peak

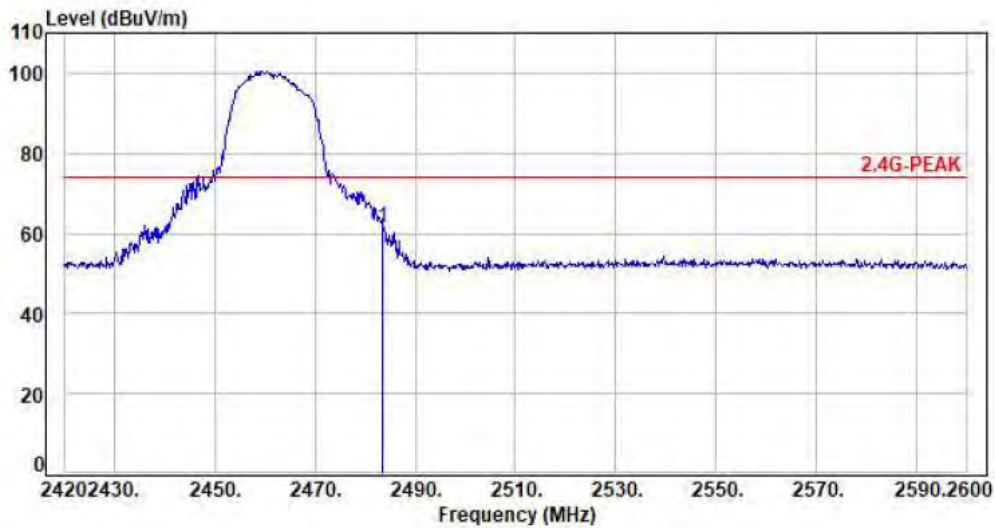

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.54	-3.88	65.30	61.42	74.00	-12.58	Peak	100	156	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 2, CH11	Detector	:	Average

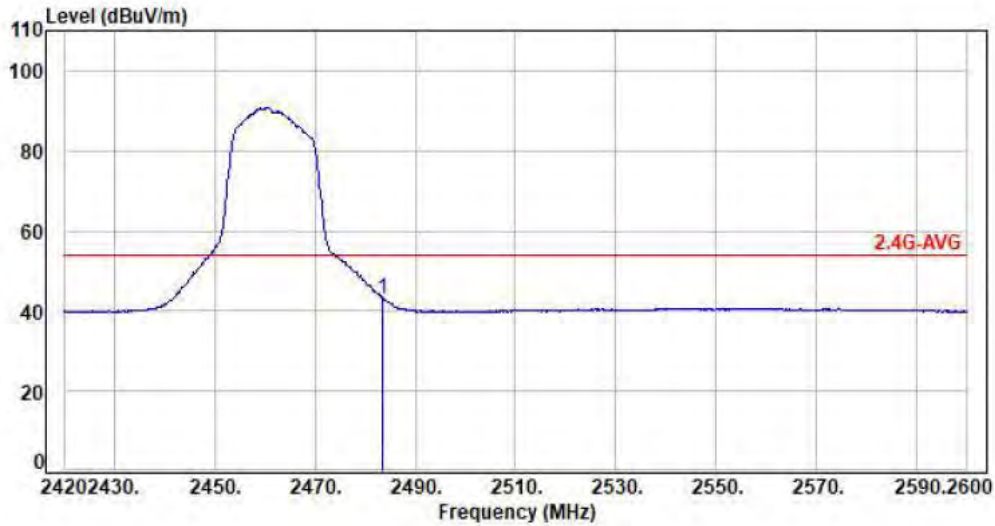

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.54	-3.88	47.03	43.15	54.00	-10.85	Average	100	188	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 2, CH11	Detector	:	Peak

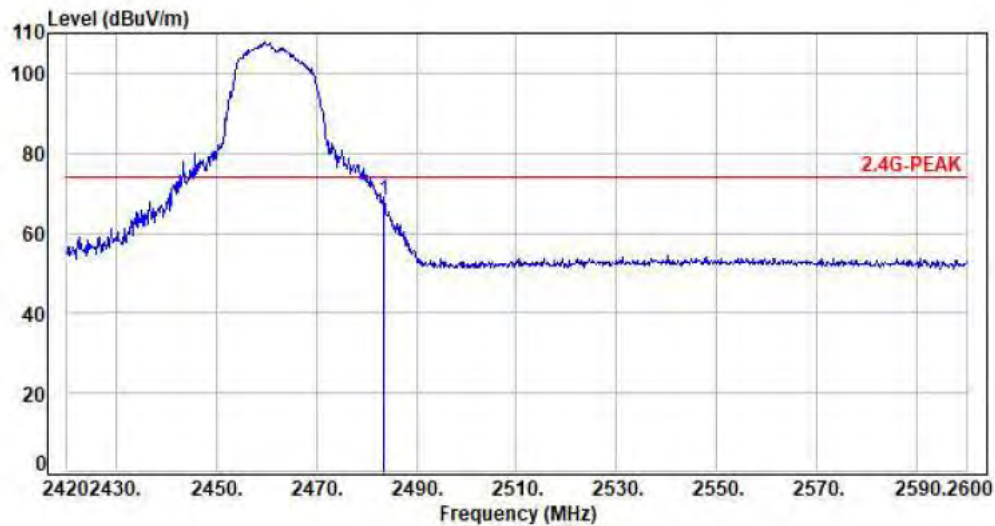


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.54	-3.88	72.02	68.14	74.00	-5.86	Peak	100	226	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 2, CH11	Detector	:	Average

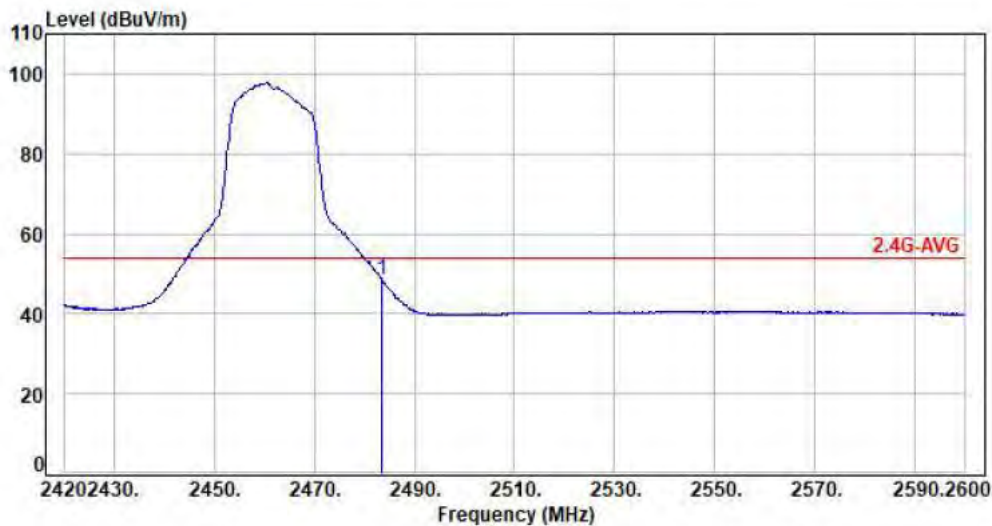

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.54	-3.88	52.54	48.66	54.00	-5.34	Average	100	236	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 3, CH01	Detector	:	Peak

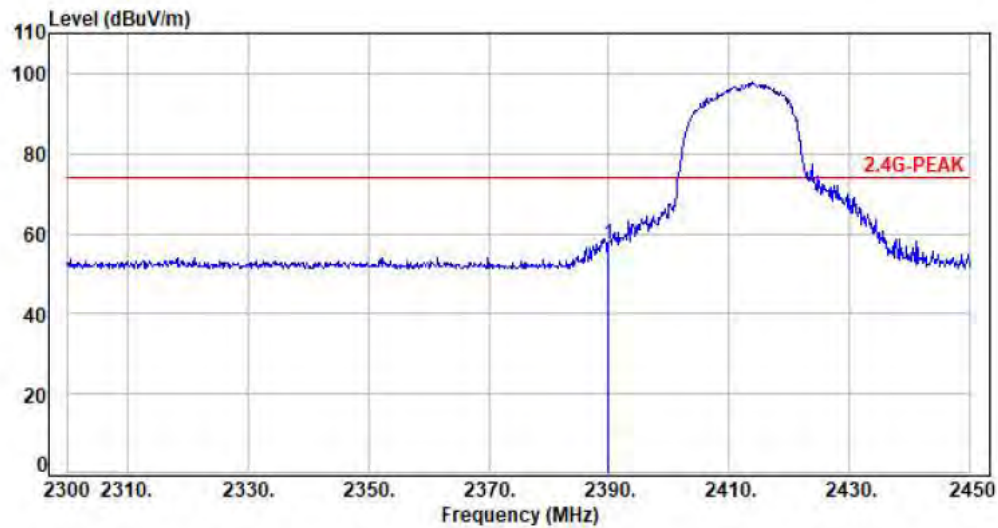


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-4.20	61.69	57.49	74.00	-16.51	Peak	100	45	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 3, CH01	Detector	:	Average

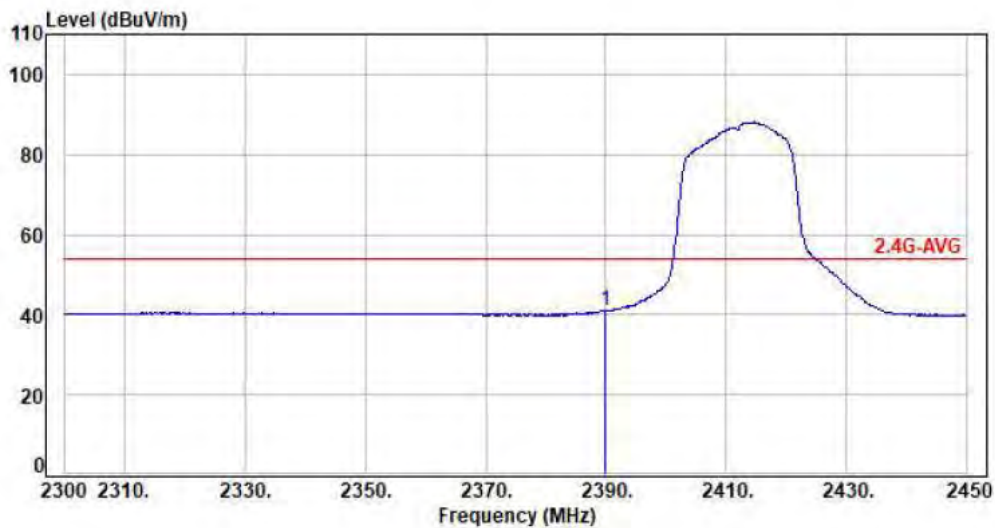

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-4.20	45.01	40.81	54.00	-13.19	Average	100	298	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 3, CH01	Detector	:	Peak

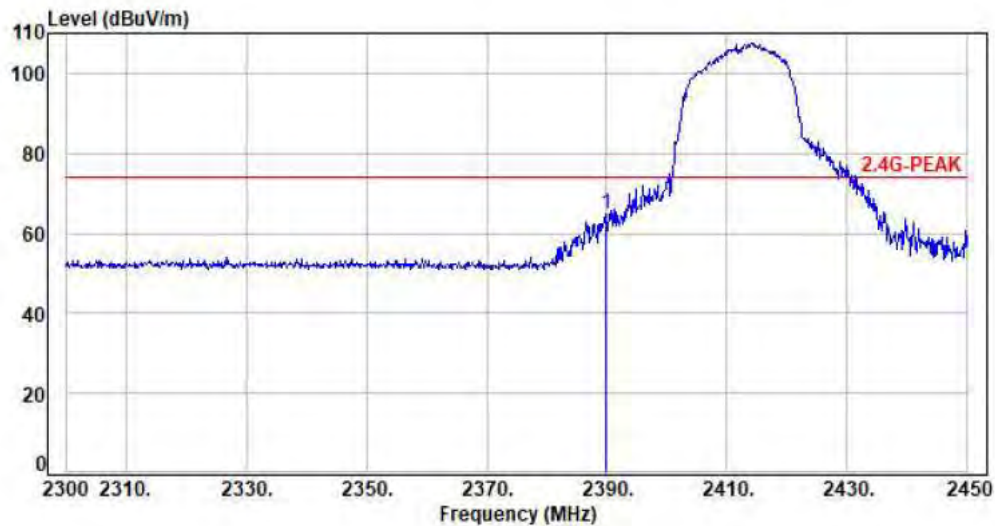


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-4.20	68.97	64.77	74.00	-9.23	Peak	100	126	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 3, CH01	Detector	:	Average

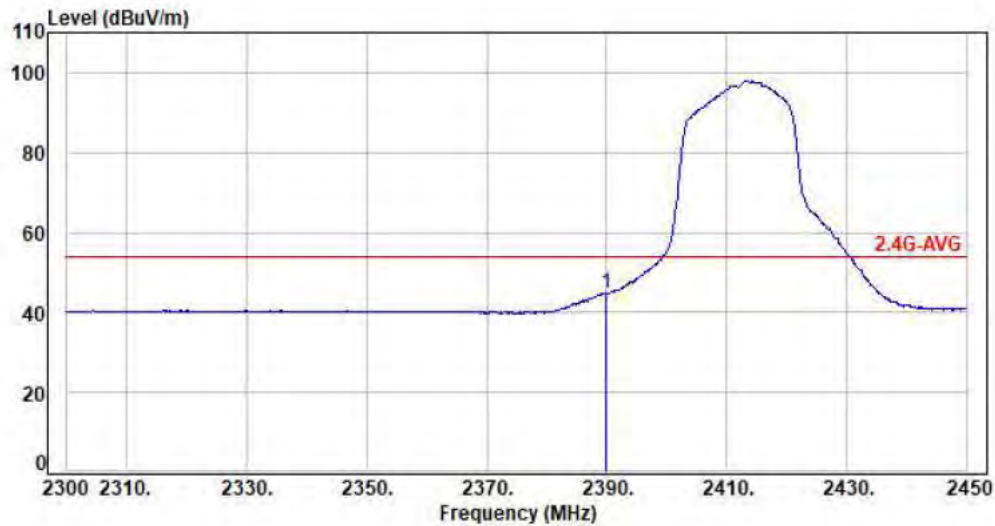

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-4.20	48.85	44.65	54.00	-9.35	Average	100	265	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 3, CH06			

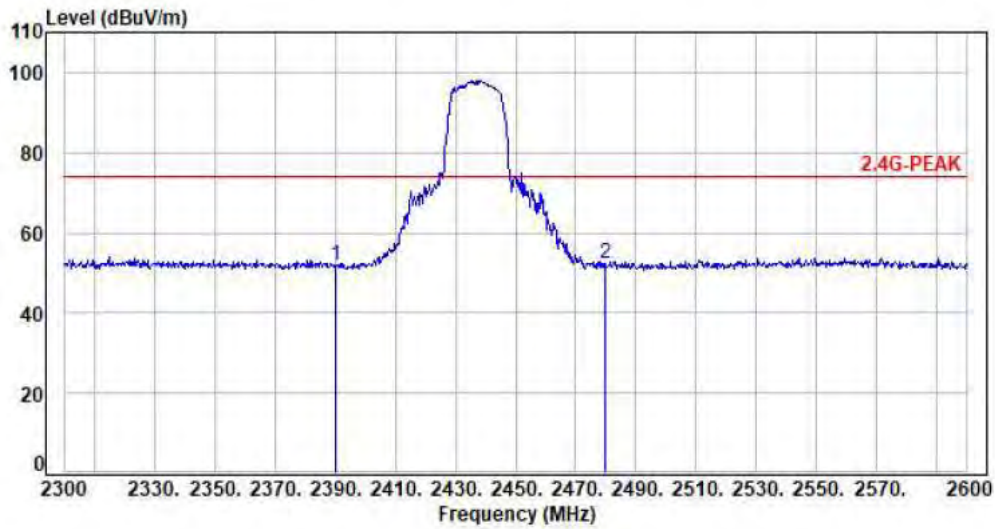


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-4.20	56.00	51.80	74.00	-22.20	Peak	100	308	P
2	2480.00	-3.89	56.18	52.29	74.00	-21.71	Peak	100	105	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 3, CH06			

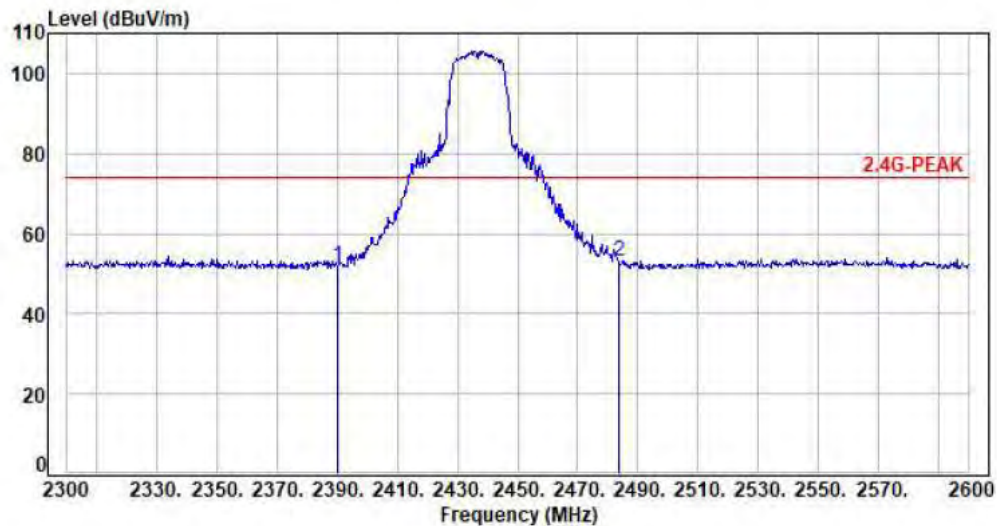


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-4.20	55.93	51.73	74.00	-22.27	Peak	100	126	P
2	2483.60	-3.88	57.14	53.26	74.00	-20.74	Peak	100	54	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 3, CH11	Detector	:	Peak

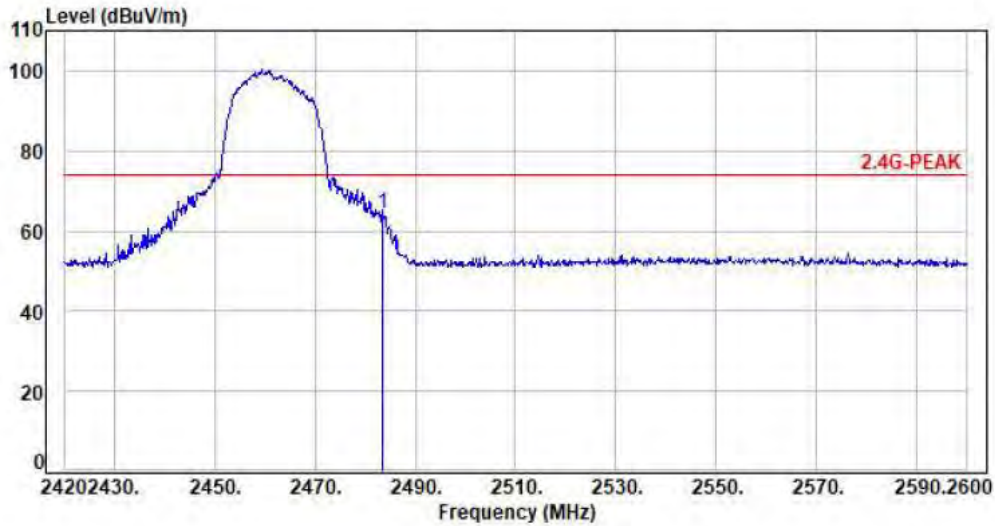

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.54	-3.88	68.48	64.60	74.00	-9.40	Peak	100	84	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 3, CH11	Detector	:	Average

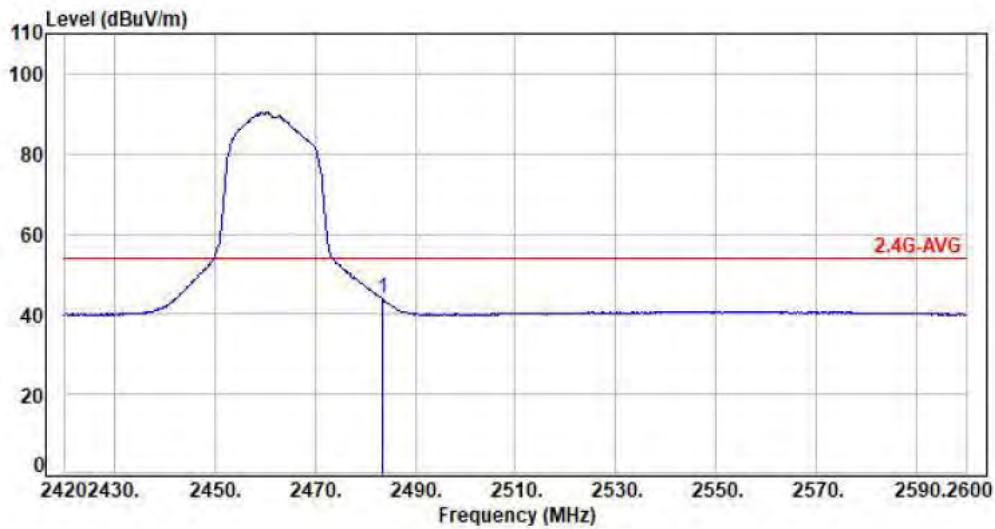

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.54	-3.88	47.67	43.79	54.00	-10.21	Average	100	149	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 3, CH11	Detector	:	Peak

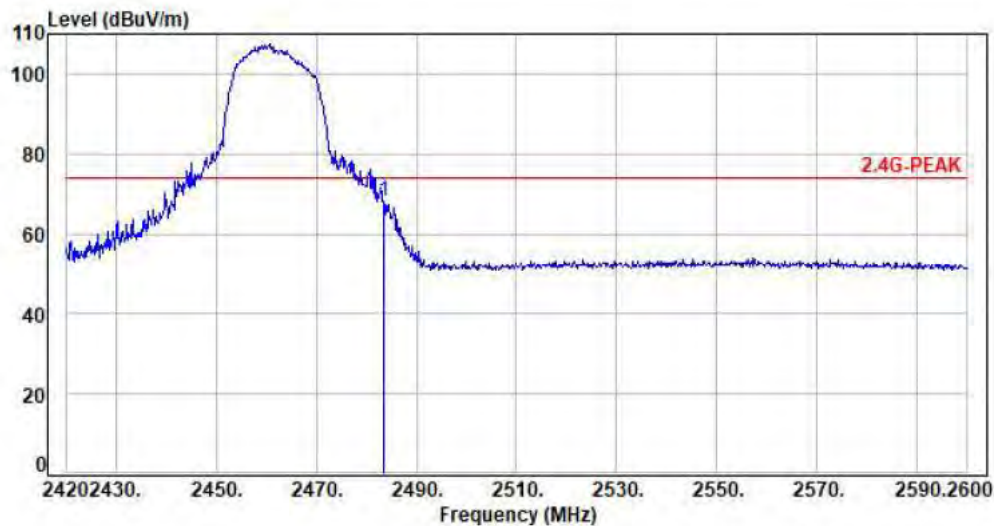


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.54	-3.88	72.01	68.13	74.00	-5.87	Peak	100	121	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 3, CH11	Detector	:	Average

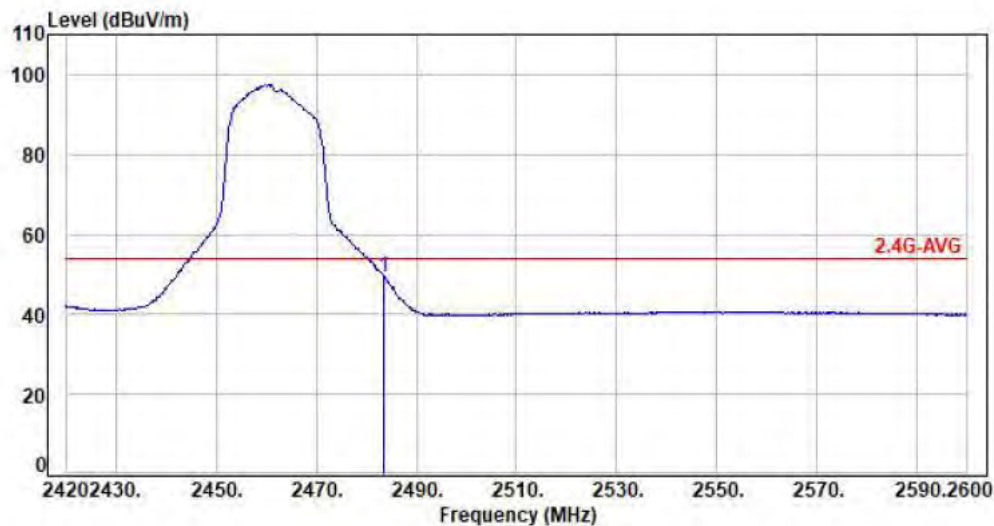

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.54	-3.88	53.29	49.41	54.00	-4.59	Average	100	77	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 4, CH03	Detector	:	Peak

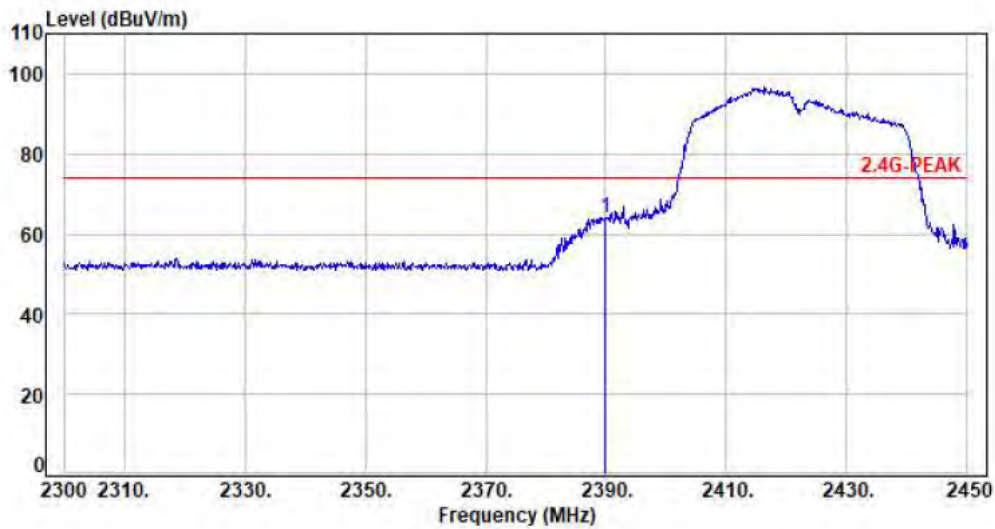

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-4.20	68.07	63.87	74.00	-10.13	Peak	100	123	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 4, CH03	Detector	:	Average

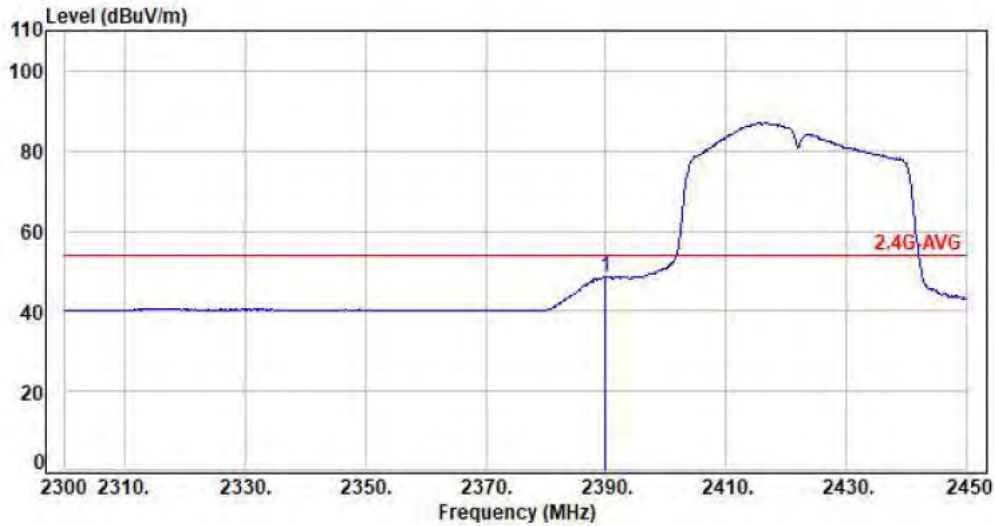


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-4.20	52.79	48.59	54.00	-5.41	Average	100	234	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 4, CH03	Detector	:	Peak

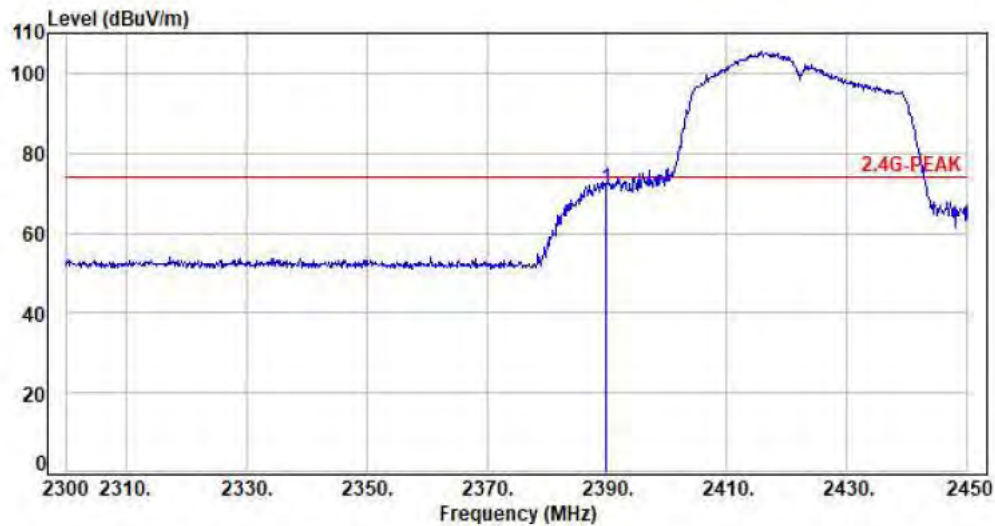

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-4.20	75.33	71.13	74.00	-2.87	Peak	100	171	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 4, CH03	Detector	:	Average

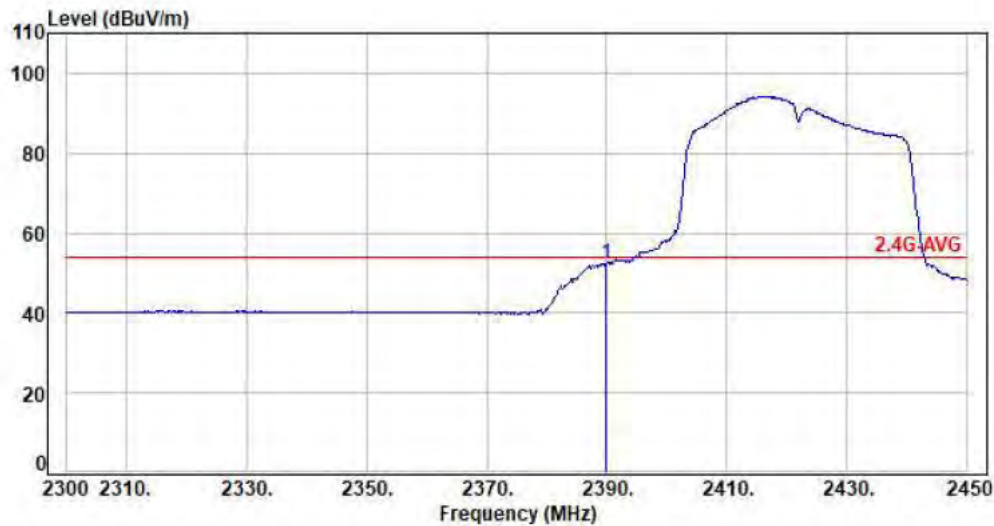

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-4.20	56.54	52.34	54.00	-1.66	Average	100	93	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 4, CH06	Detector	:	Peak

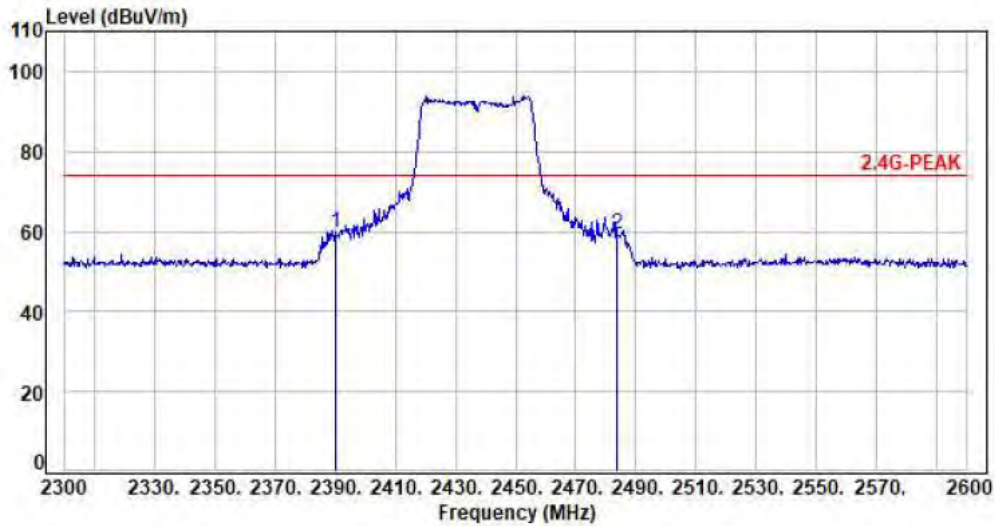


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-4.20	64.16	59.96	74.00	-14.04	Peak	100	183	P
2	2483.60	-3.88	63.35	59.47	74.00	-14.53	Peak	100	127	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 4, CH06	Detector	:	Average

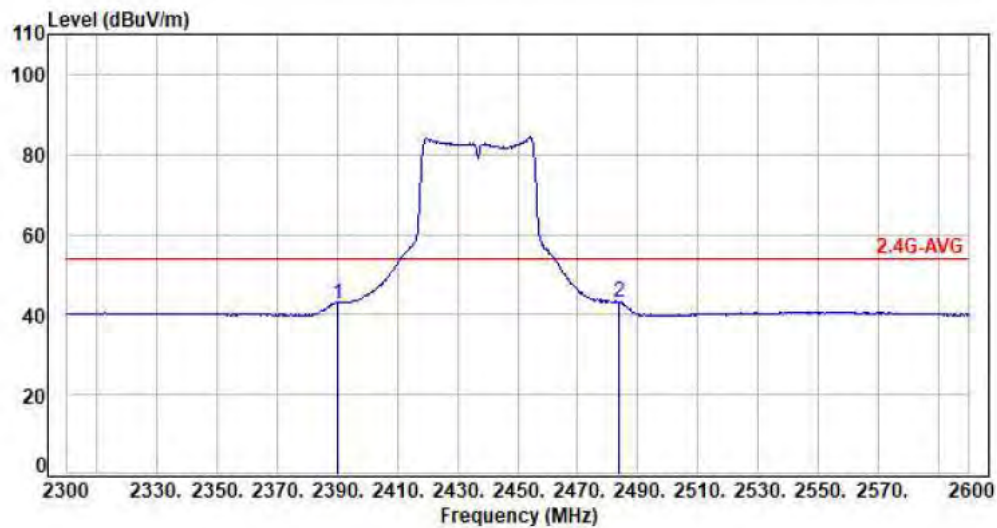


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-4.20	46.97	42.77	54.00	-11.23	Average	100	5	P
2	2483.60	-3.88	46.96	43.08	54.00	-10.92	Average	100	35	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 4, CH06	Detector	:	Peak

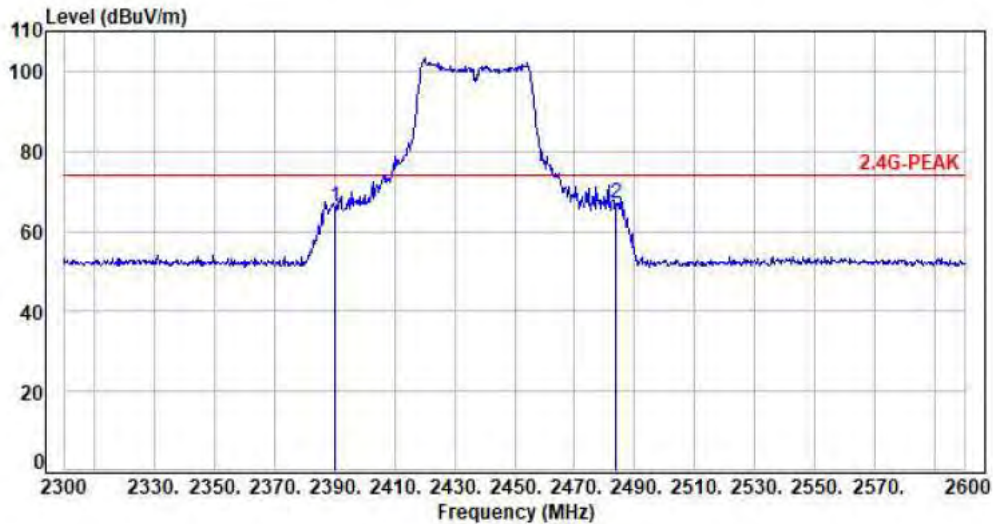


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-4.20	70.46	66.26	74.00	-7.74	Peak	100	173	P
2	2483.60	-3.88	70.73	66.85	74.00	-7.15	Peak	100	235	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 4, CH06	Detector	:	Average

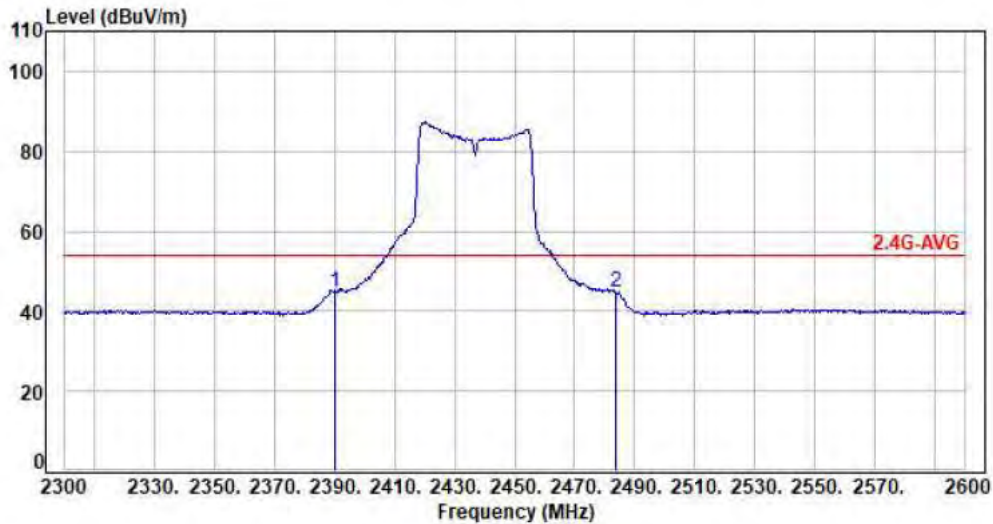


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-4.20	48.95	44.75	54.00	-9.25	Average	100	159	P
2	2483.60	-3.88	48.77	44.89	54.00	-9.11	Average	100	301	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 4, CH09	Detector	:	Peak

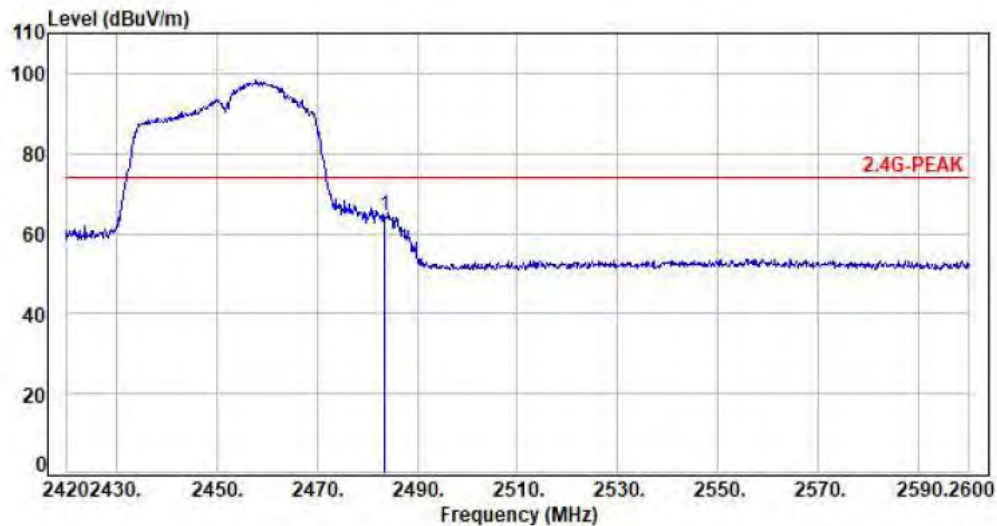


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.54	-3.88	68.22	64.34	74.00	-9.66	Peak	100	25	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 4, CH09	Detector	:	Average

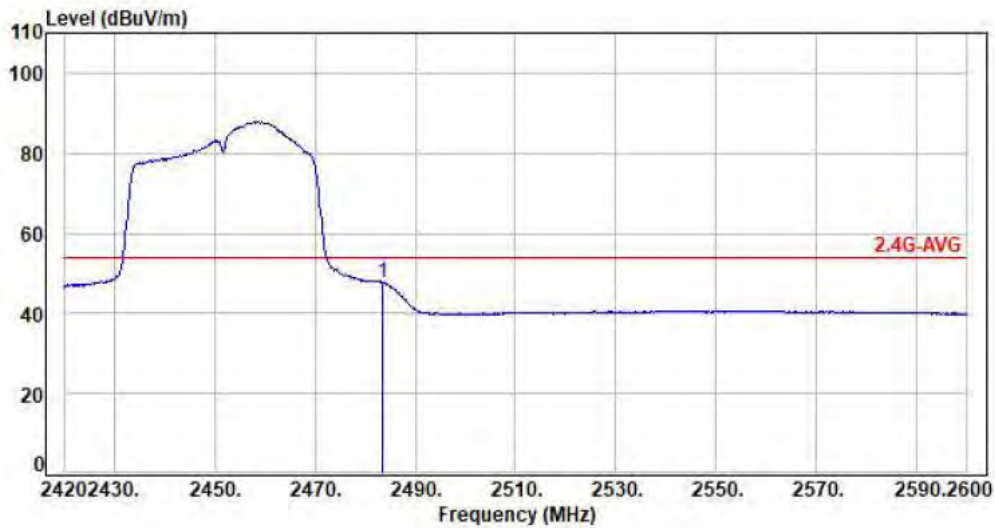

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.54	-3.88	51.62	47.74	54.00	-6.26	Average	100	349	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 4, CH09	Detector	:	Peak

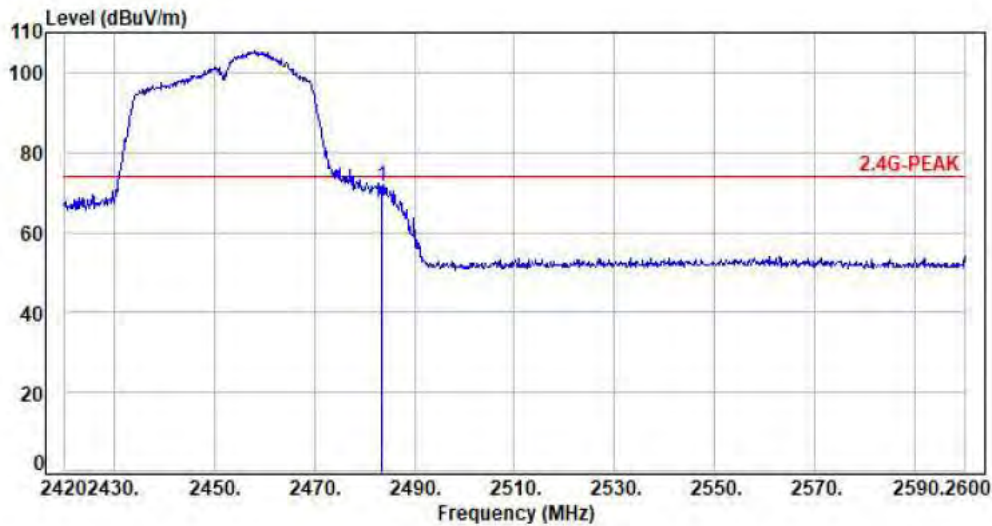


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.54	-3.88	75.61	71.73	74.00	-2.27	Peak	100	77	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 4, CH09	Detector	:	Average

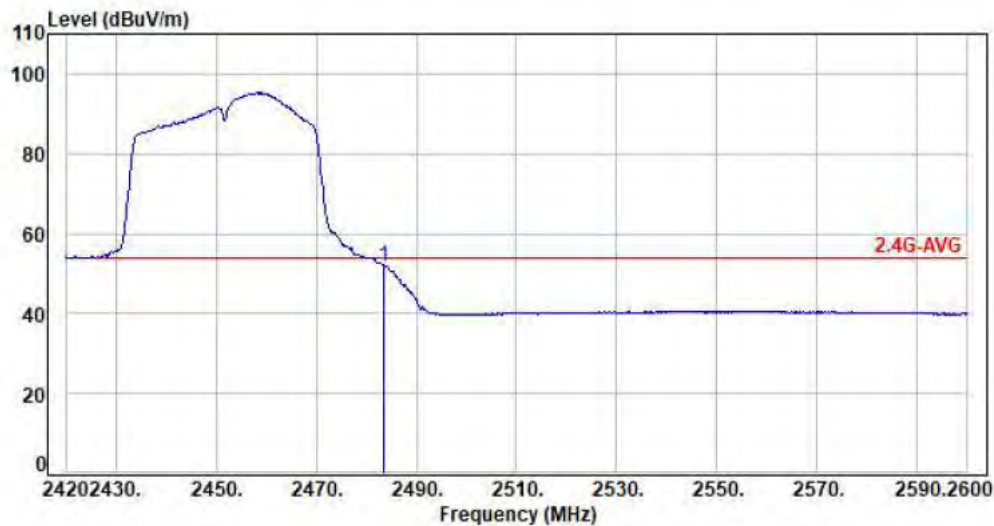

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.54	-3.88	55.82	51.94	54.00	-2.06	Average	100	90	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**6.7 Test Result and Data (1GHz ~ 3GHz)**

Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH01			

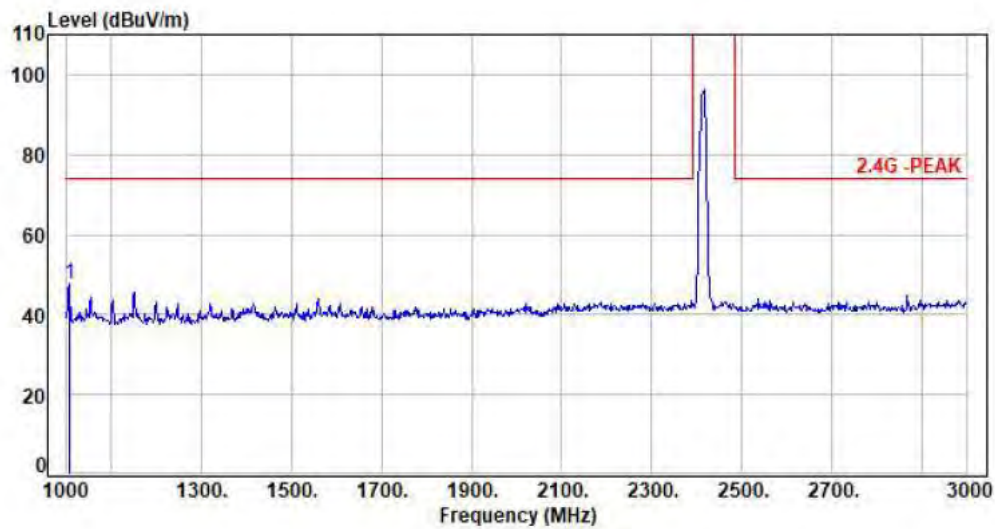

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	1008.00	-9.12	56.65	47.53	74.00	-26.47	Peak	100	263	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, CH01			

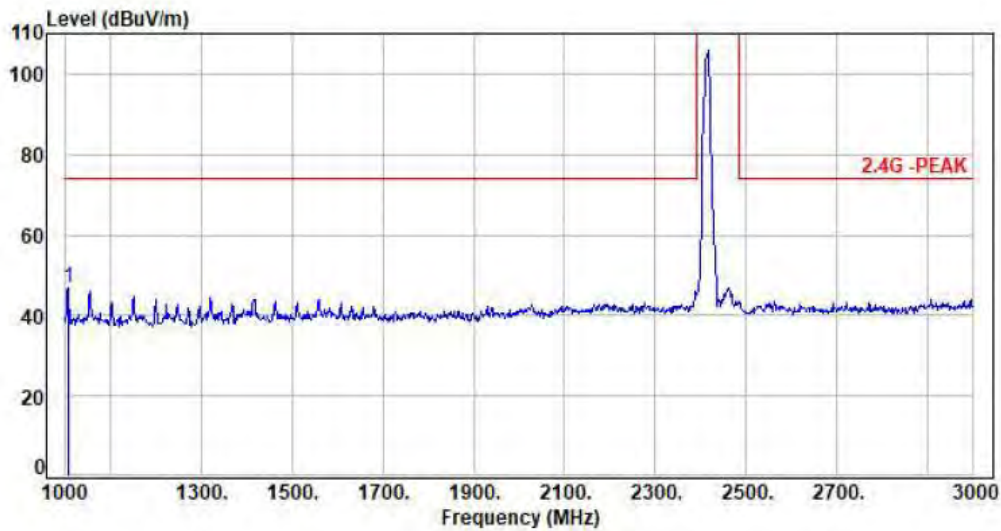


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	1008.00	-9.12	56.13	47.01	74.00	-26.99	Peak	100	310	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH06			

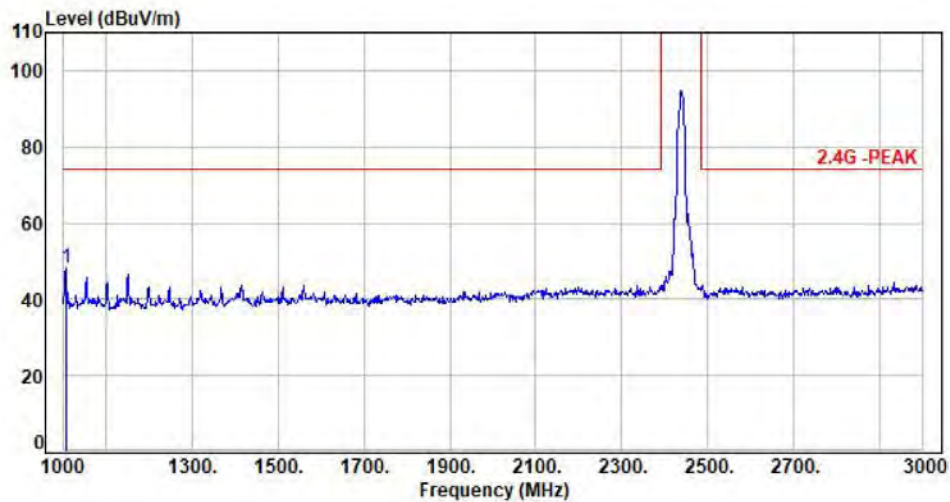

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	1008.00	-9.12	57.03	47.91	74.00	-26.09	Peak	100	261	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, CH06			

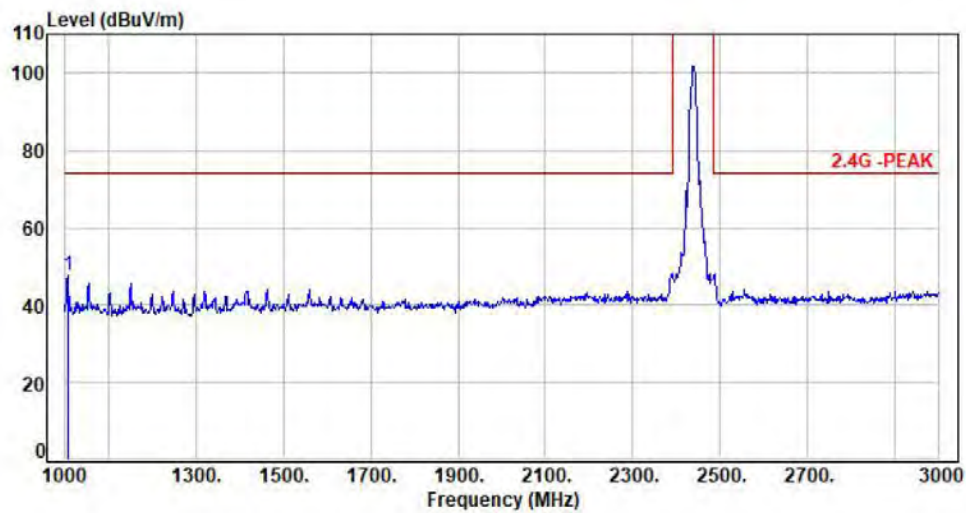

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	1008.00	-9.12	56.79	47.67	74.00	-26.33	Peak	100	277	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH11		:	

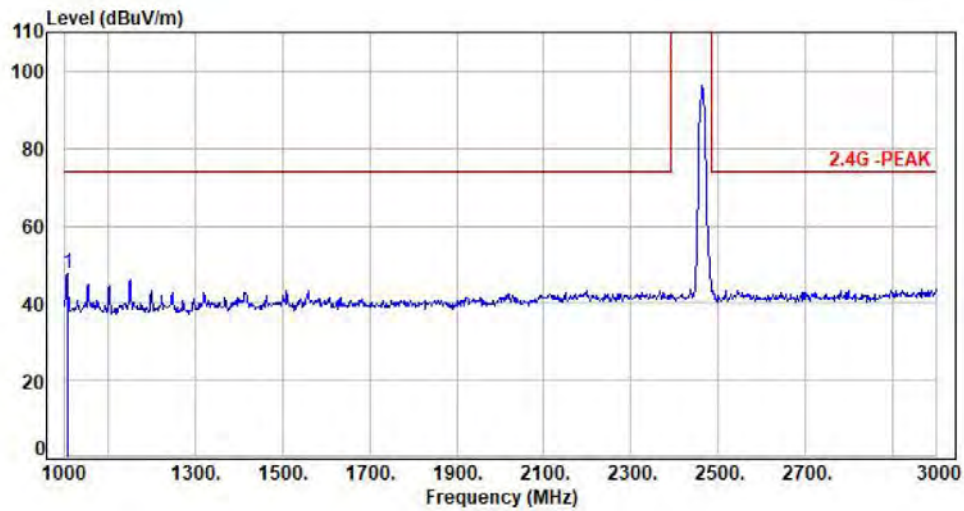

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	1008.00	-9.12	56.69	47.57	74.00	-26.43	Peak	100	121	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, CH11			

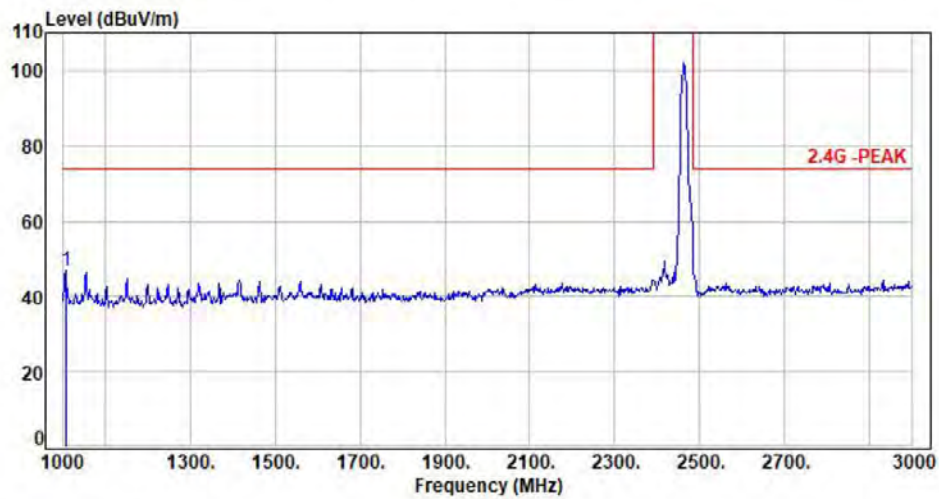

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	1008.00	-9.12	56.17	47.05	74.00	-26.95	Peak	100	66	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 2, CH01			

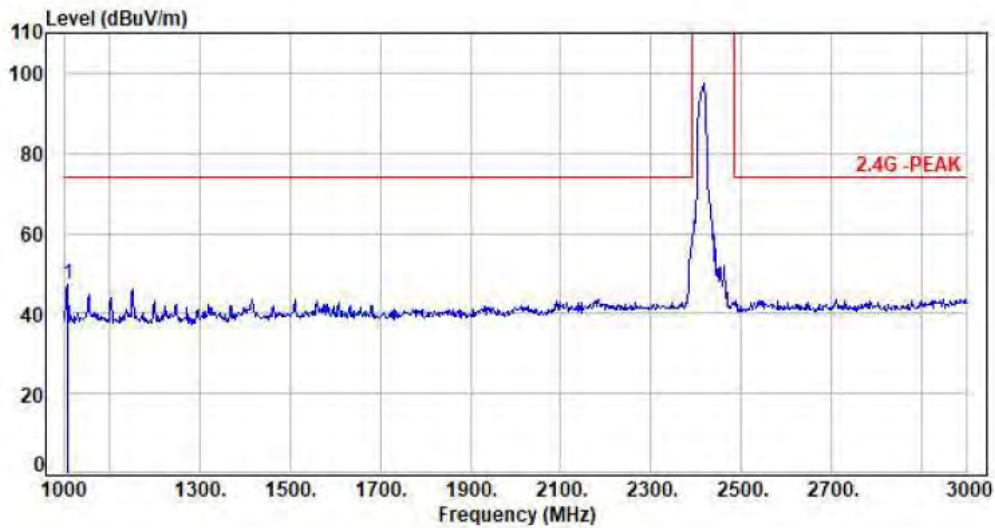

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	1008.00	-9.12	56.33	47.21	74.00	-26.79	Peak	100	20	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 2, CH01			

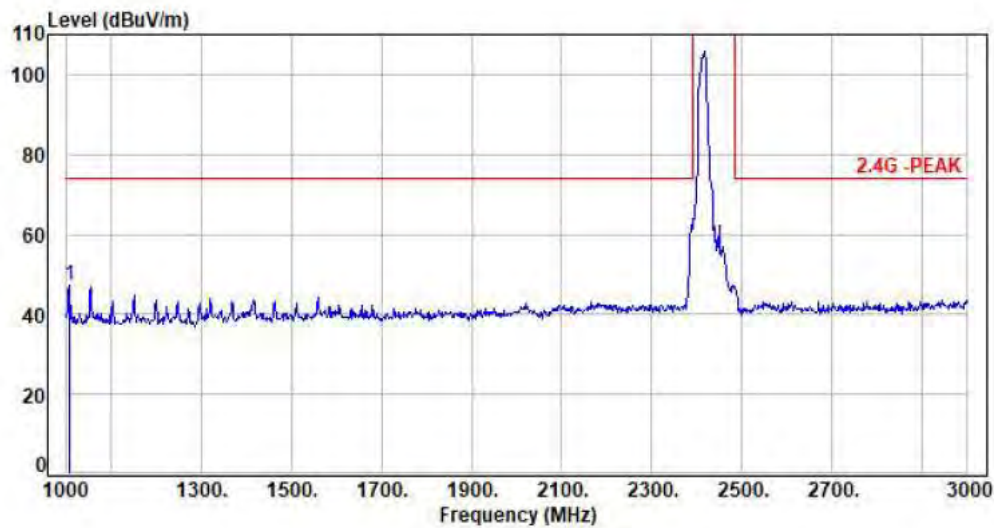

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	1008.00	-9.12	56.18	47.06	74.00	-26.94	Peak	100	198	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 2, CH06			

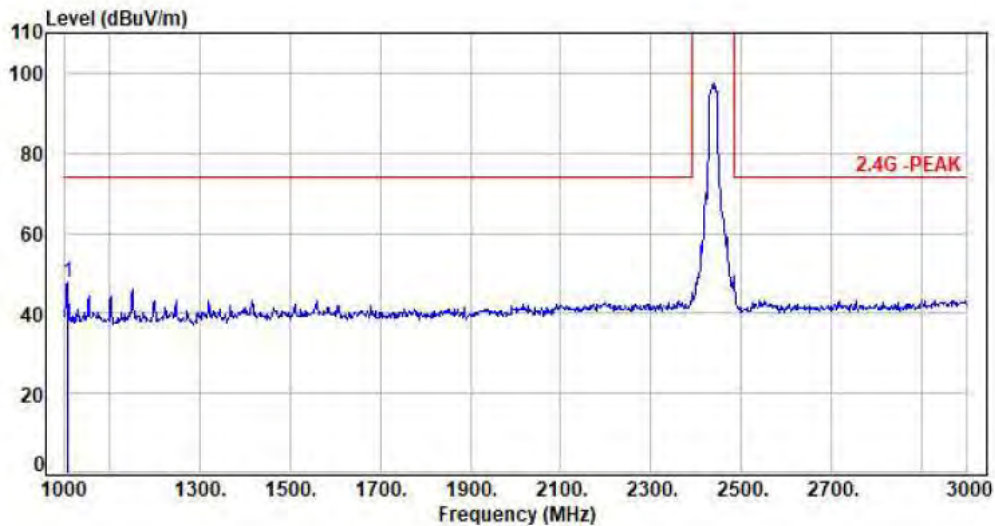

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	1008.00	-9.12	56.71	47.59	74.00	-26.41	Peak	100	225	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 2, CH06			

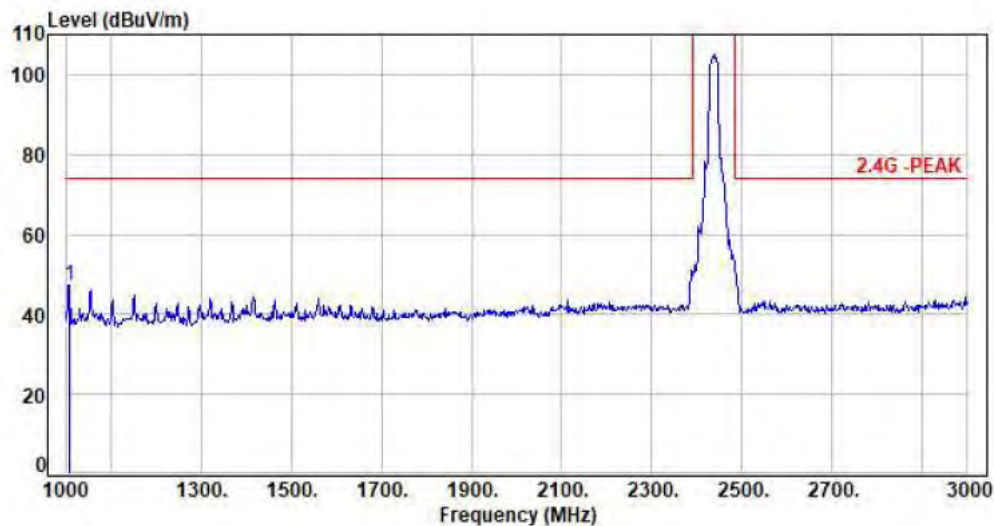

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	1008.00	-9.12	56.48	47.36	74.00	-26.64	Peak	100	351	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 2, CH11			

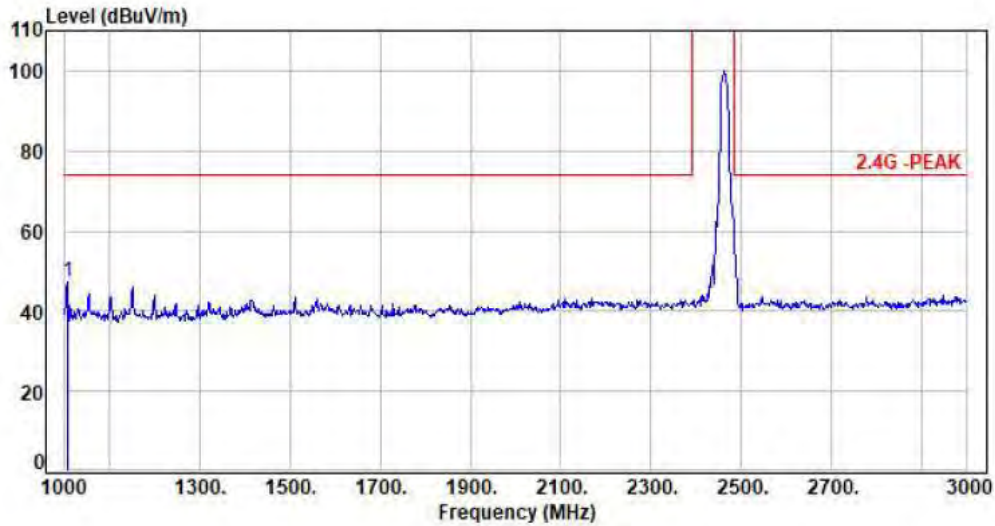


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	1008.00	-9.12	56.48	47.36	74.00	-26.64	Peak	100	32	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 2, CH11			

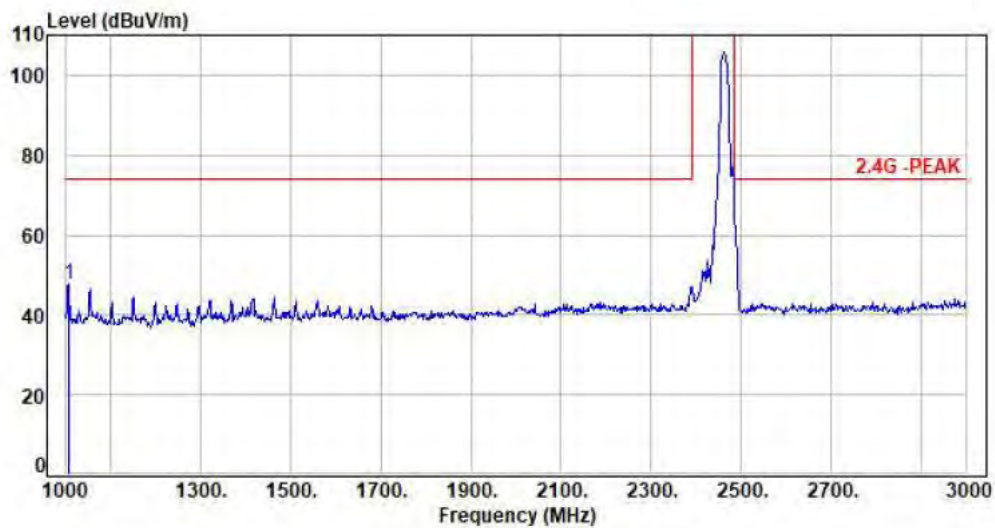


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	1008.00	-9.12	56.61	47.49	74.00	-26.51	Peak	100	176	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 3, CH01			

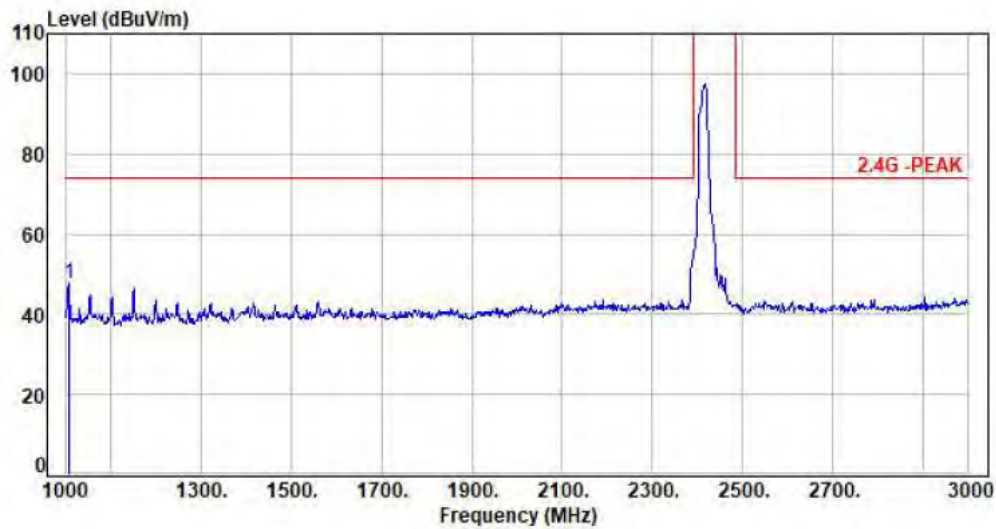

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	1008.00	-9.12	56.99	47.87	74.00	-26.13	Peak	100	197	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 3, CH01			

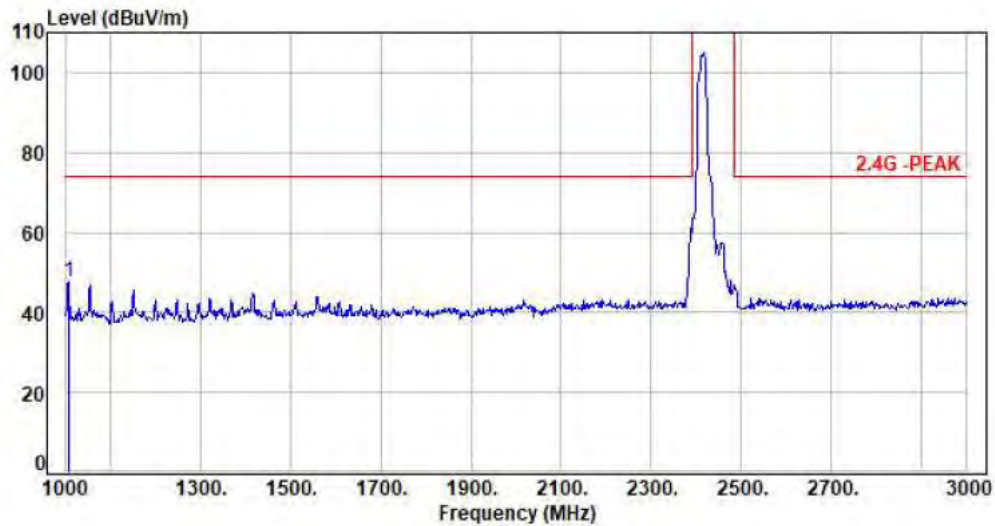

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	1008.00	-9.12	56.80	47.68	74.00	-26.32	Peak	100	20	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 3, CH06			

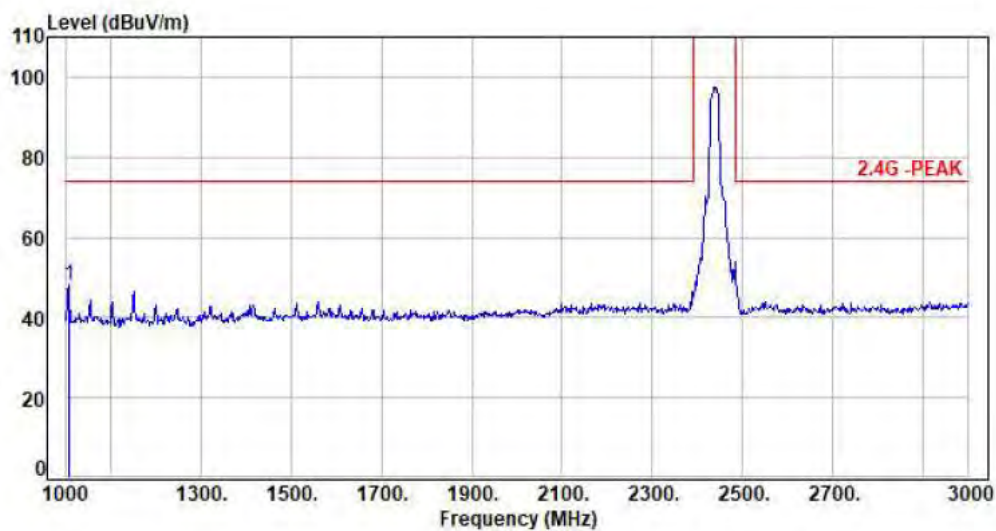


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	1008.00	-9.12	57.28	48.16	74.00	-25.84	Peak	100	287	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 3, CH06			

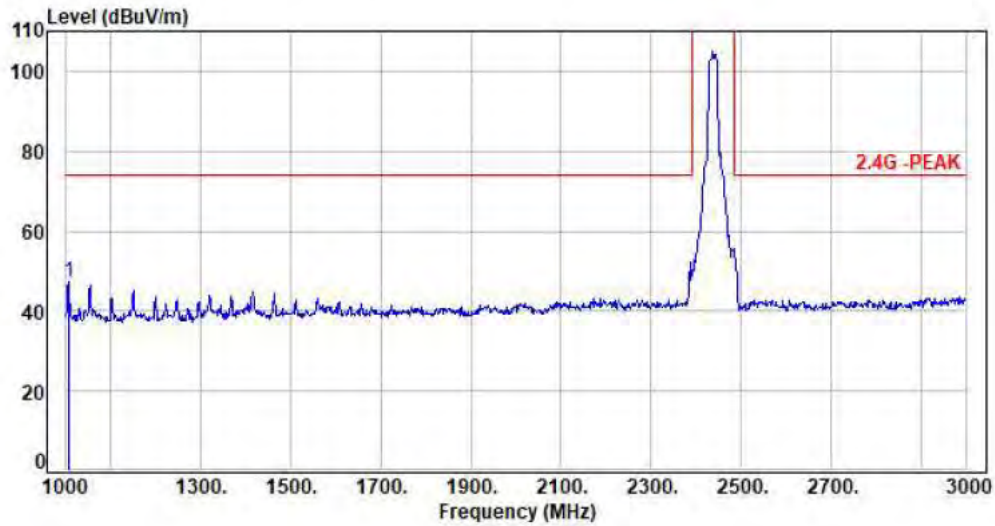


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	1008.00	-9.12	56.17	47.05	74.00	-26.95	Peak	100	256	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 3, CH11			

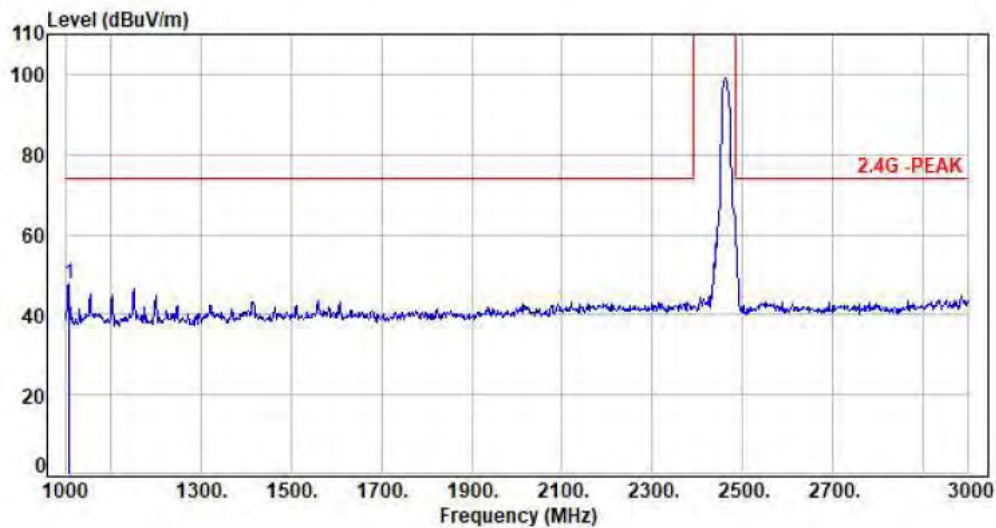

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	1008.00	-9.12	56.60	47.48	74.00	-26.52	Peak	100	277	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 3, CH11			

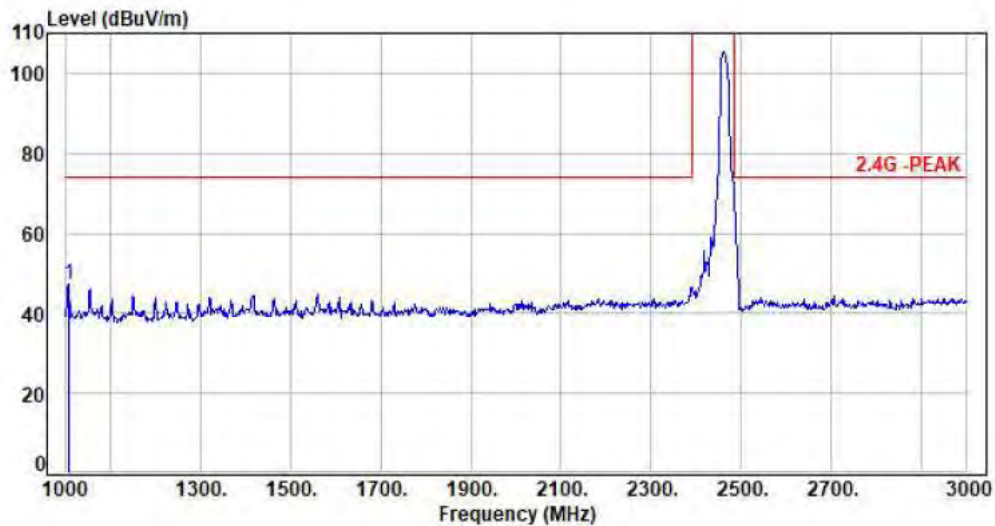


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	1008.00	-9.12	56.55	47.43	74.00	-26.57	Peak	100	344	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 4, CH03			

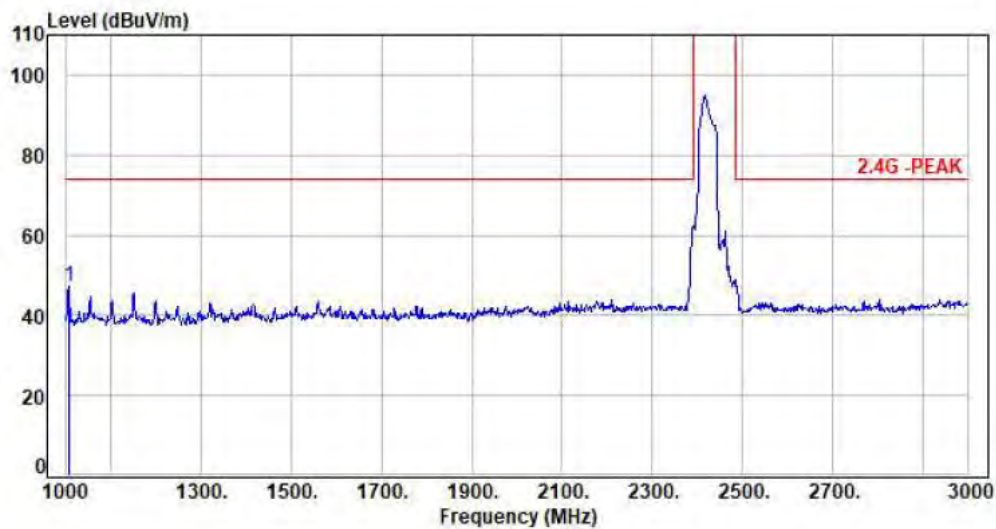


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	1008.00	-9.12	56.28	47.16	74.00	-26.84	Peak	100	194	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 4, CH03			

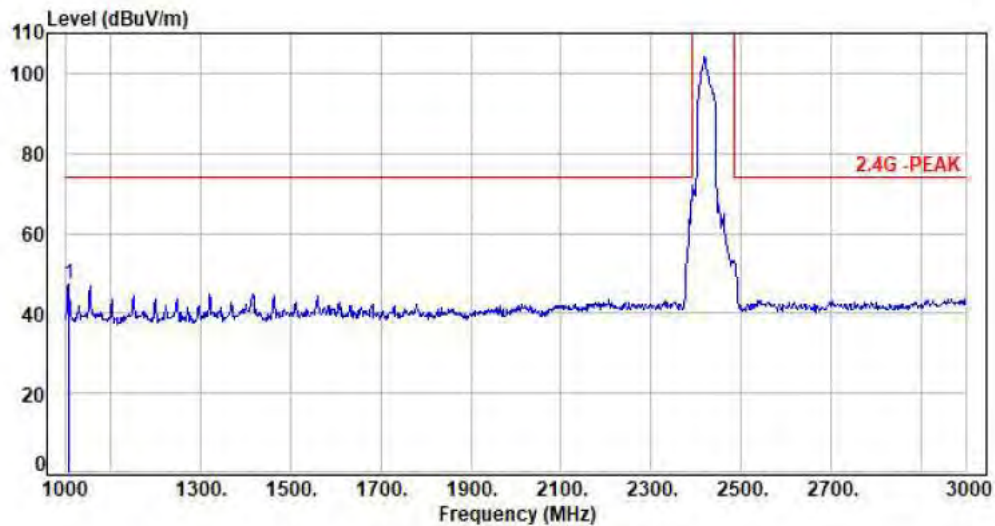

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	1008.00	-9.12	56.34	47.22	74.00	-26.78	Peak	100	9	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 4, CH06			

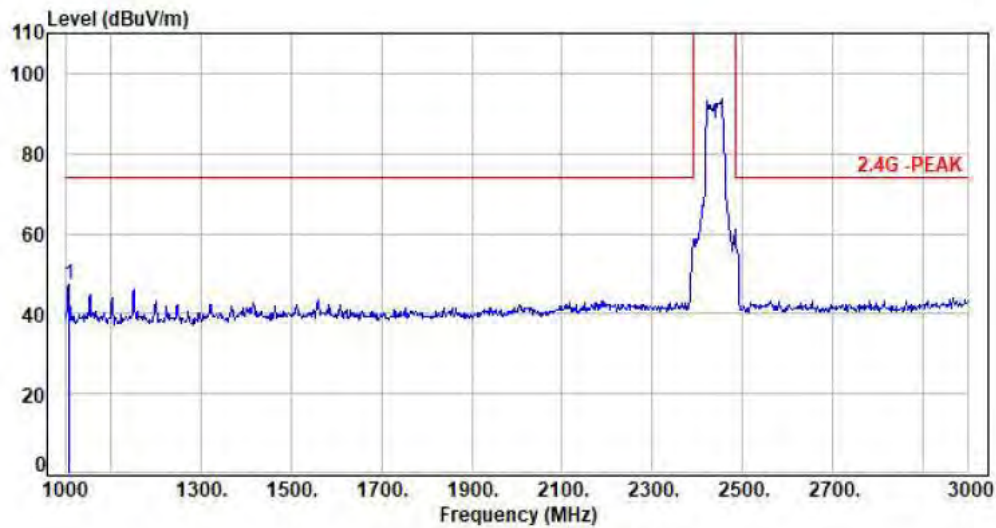


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	1008.00	-9.12	56.49	47.37	74.00	-26.63	Peak	100	68	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 4, CH06			

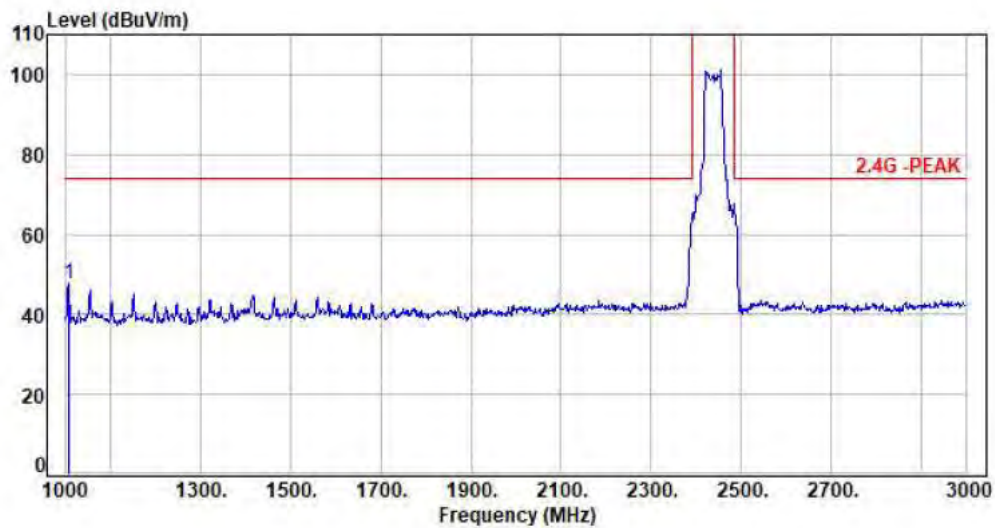


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	1008.00	-9.12	56.81	47.69	74.00	-26.31	Peak	100	218	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 4, CH09			

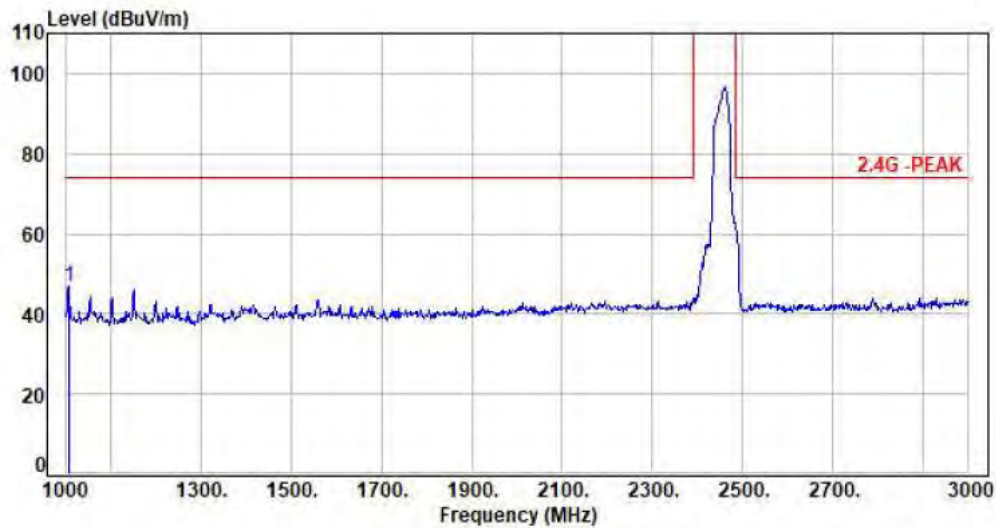


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	1008.00	-9.12	55.91	46.79	74.00	-27.21	Peak	100	126	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 4, CH09			

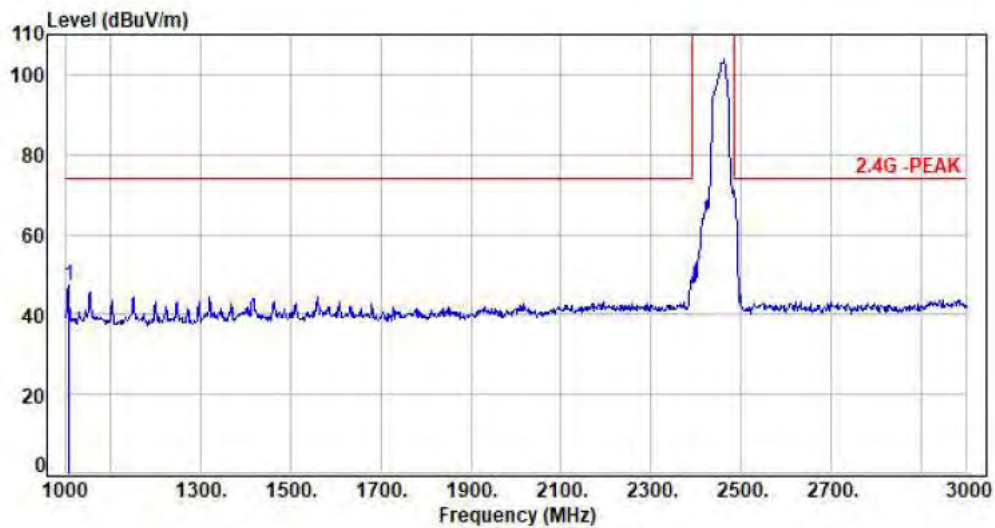

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	1008.00	-9.12	56.44	47.32	74.00	-26.68	Peak	100	238	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

**6.8 Test Result and Data (3GHz ~ 18GHz)**

Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH01	Detector	:	Peak

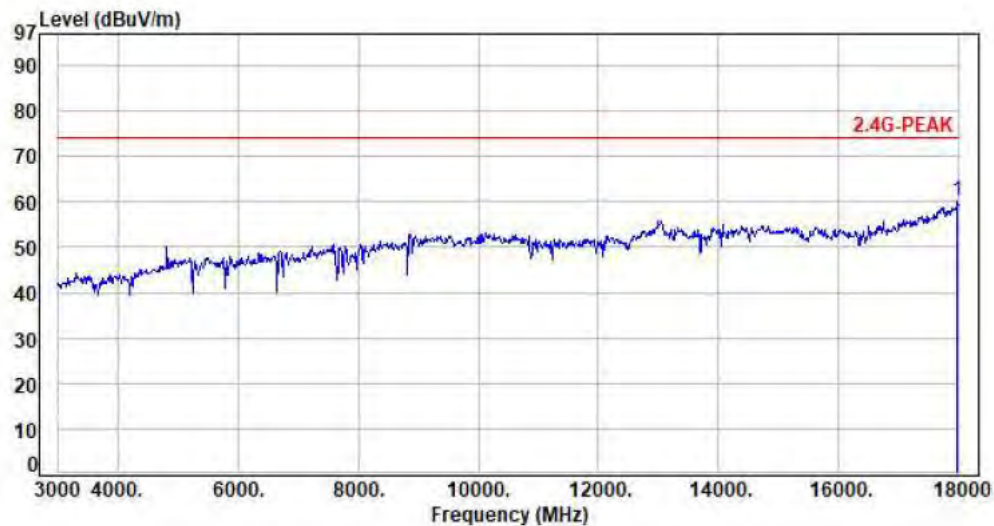

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17970.00	14.80	45.44	60.24	74.00	-13.76	Peak	100	193	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH01	Detector	:	Average

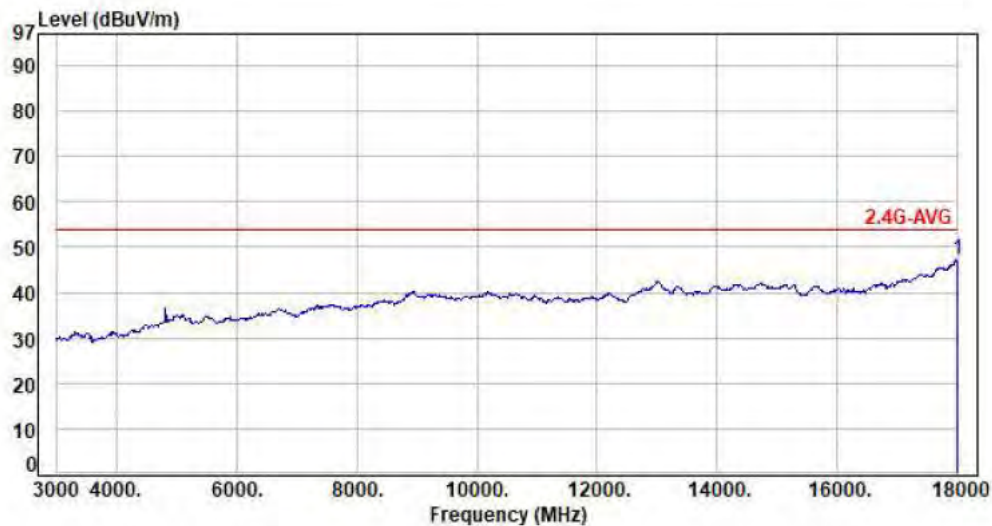

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17985.00	14.83	32.37	47.20	54.00	-6.80	Average	100	59	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, CH01	Detector	:	Peak

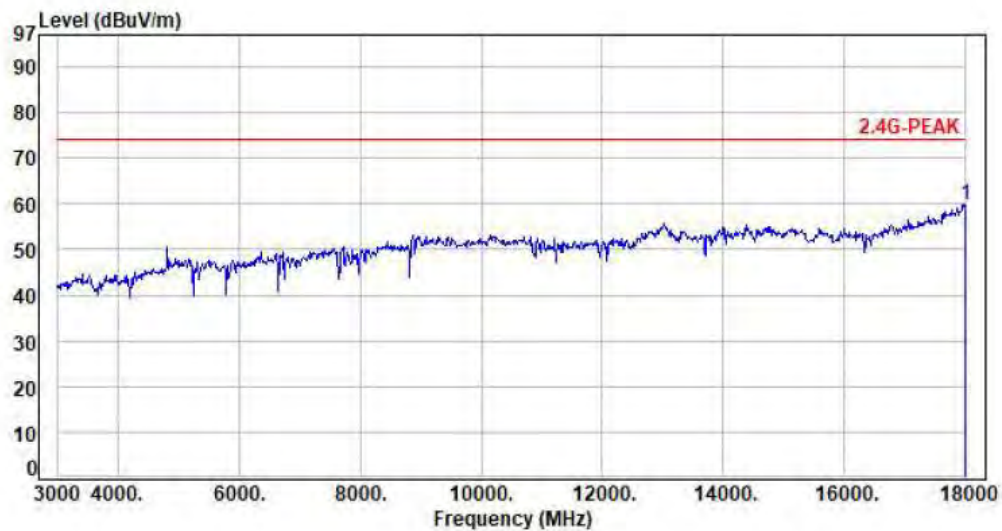

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17985.00	14.83	45.09	59.92	74.00	-14.08	Peak	100	160	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, CH01	Detector	:	Average

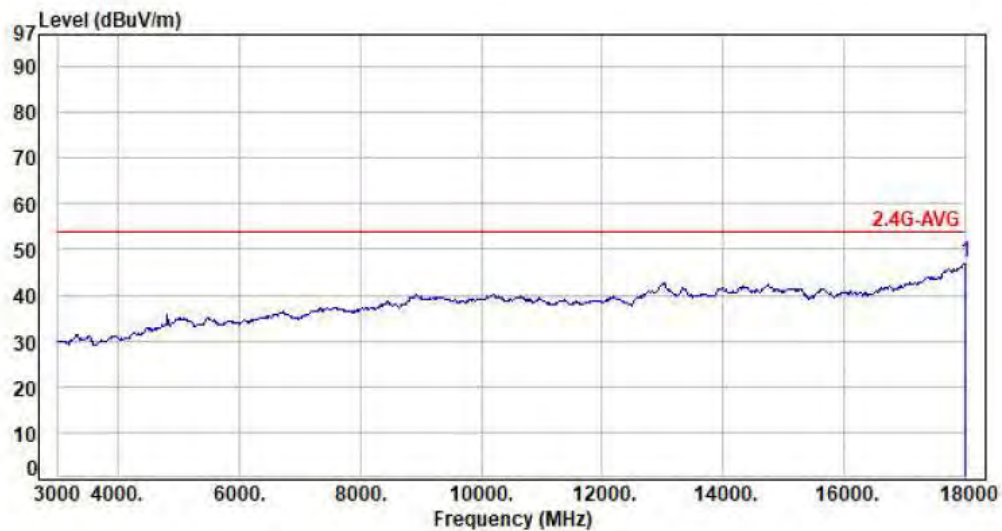

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17999.00	14.85	32.43	47.28	54.00	-6.72	Average	100	202	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH06	Detector	:	Peak

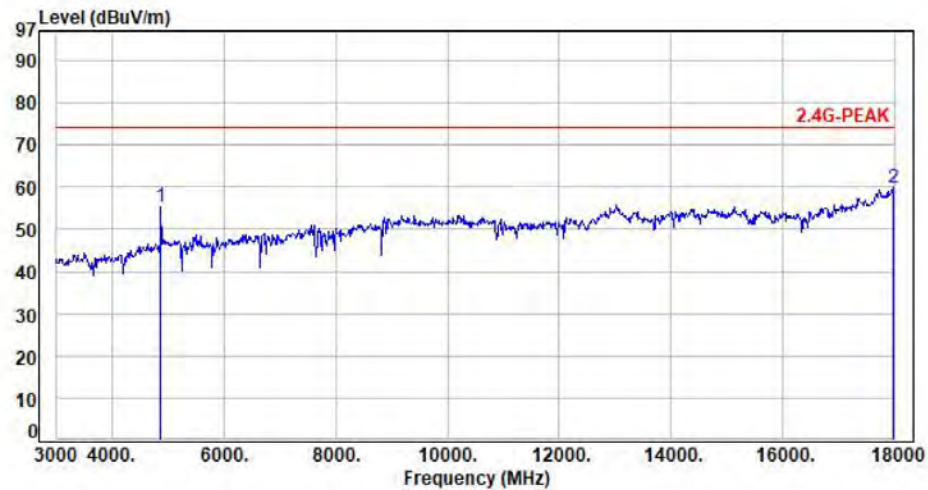


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	4875.00	2.18	53.27	55.45	74.00	-18.55	Peak	100	101	P
2	17955.00	14.78	45.05	59.83	74.00	-14.17	Peak	100	156	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH06	Detector	:	Average

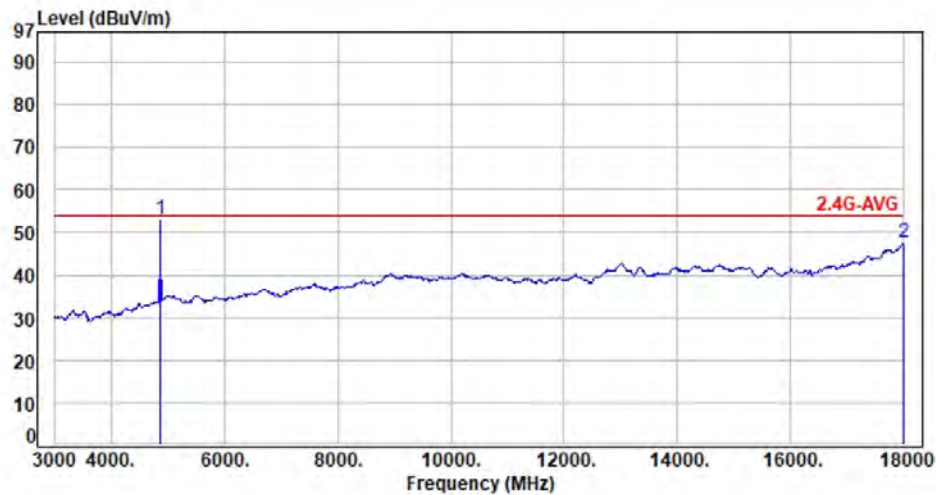

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	4860.00	2.16	50.78	52.94	54.00	-1.06	Average	100	57	P
2	17999.00	14.85	32.60	47.45	54.00	-6.55	Average	100	165	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, CH06	Detector	:	Peak

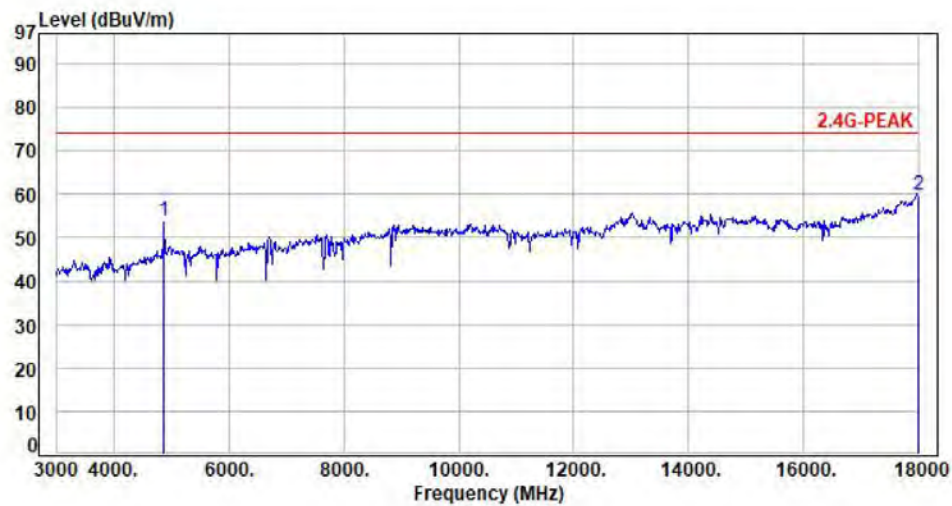

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	4875.00	2.18	51.64	53.82	74.00	-20.18	Peak	100	56	P
2	17999.00	14.85	44.73	59.58	74.00	-14.42	Peak	100	165	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, CH06	Detector	:	Average

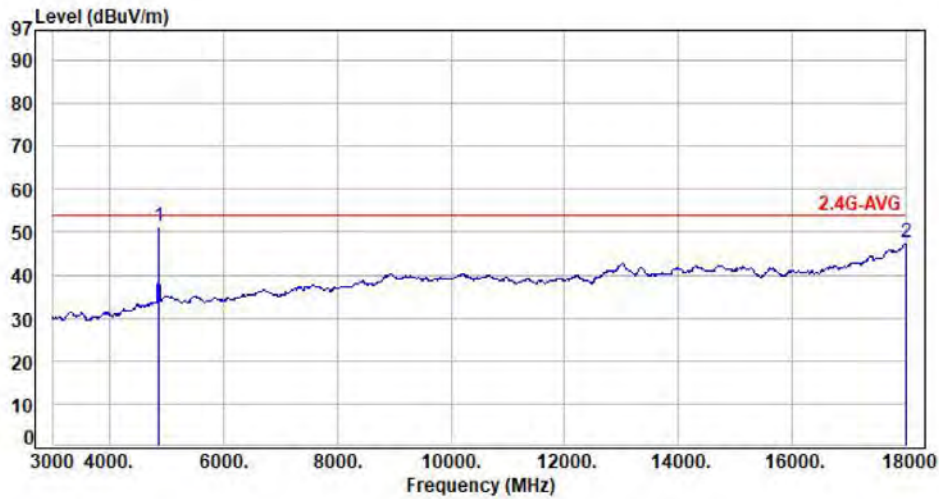


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	4860.00	2.16	48.98	51.14	54.00	-2.86	Average	100	348	P
2	17999.00	14.85	32.74	47.59	54.00	-6.41	Average	100	234	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH11	Detector	:	Peak

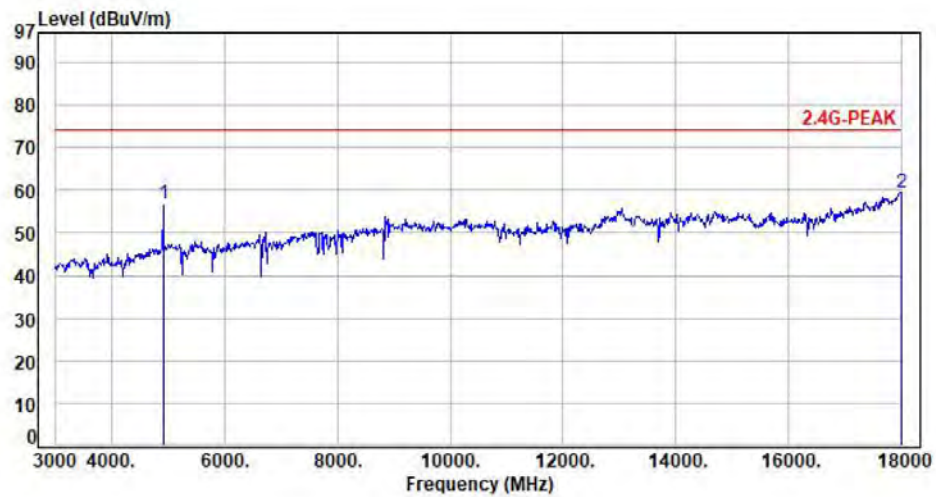


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	4920.00	2.31	54.60	56.91	74.00	-17.09	Peak	100	92	P
2	17985.00	14.83	44.67	59.50	74.00	-14.50	Peak	100	210	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 1, CH11	Detector	:	Average

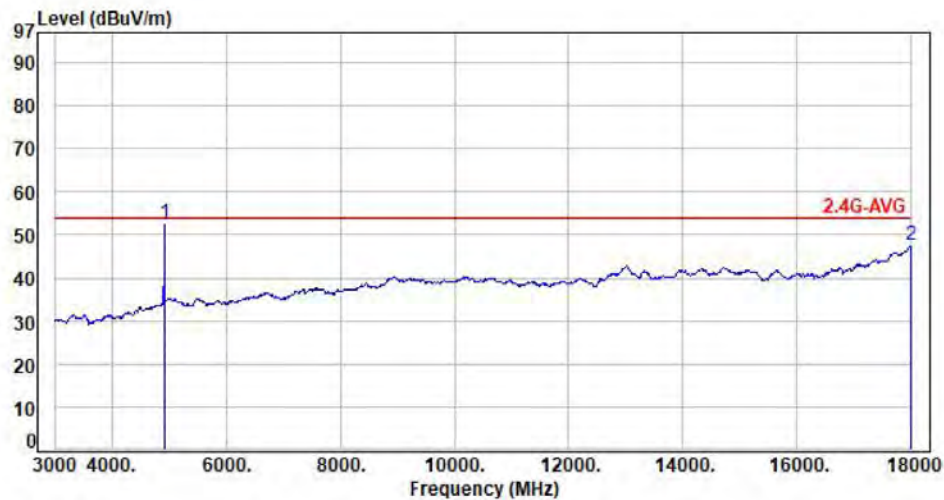

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	4920.00	2.31	50.48	52.79	54.00	-1.21	Average	100	94	P
2	17985.00	14.83	32.63	47.46	54.00	-6.54	Average	100	275	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, CH11	Detector	:	Peak

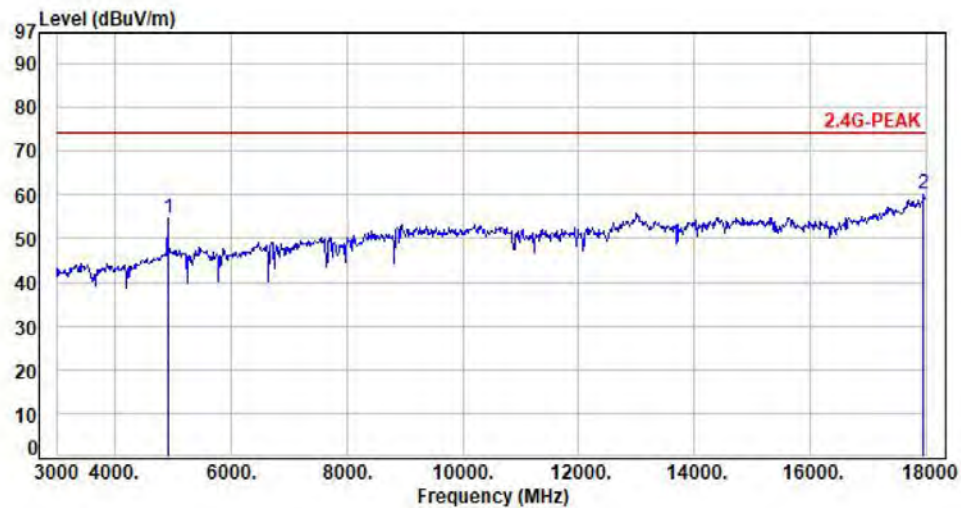


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	4920.00	2.31	52.23	54.54	74.00	-19.46	Peak	100	154	P
2	17940.00	14.74	45.47	60.21	74.00	-13.79	Peak	100	104	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 1, CH11	Detector	:	Average

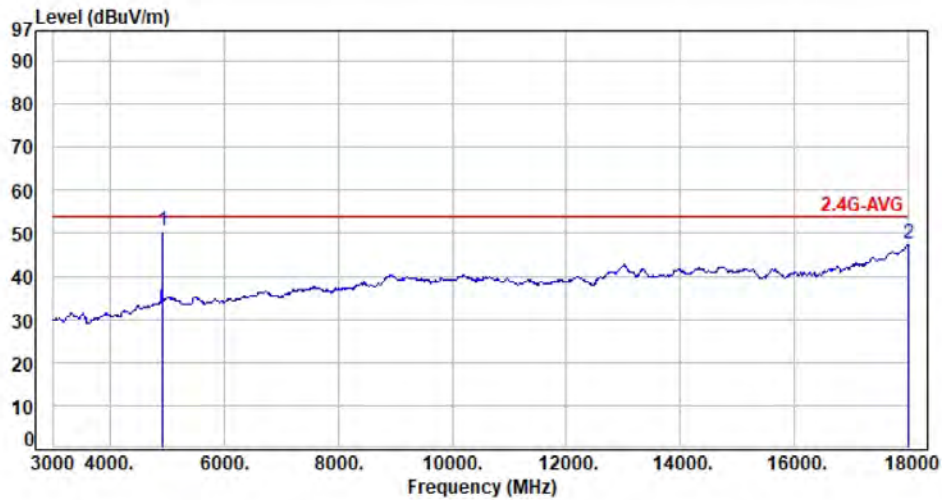

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	4920.00	2.31	48.22	50.53	54.00	-3.47	Average	100	321	P
2	17999.00	14.85	32.55	47.40	54.00	-6.60	Average	100	240	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 2, CH01	Detector	:	Peak

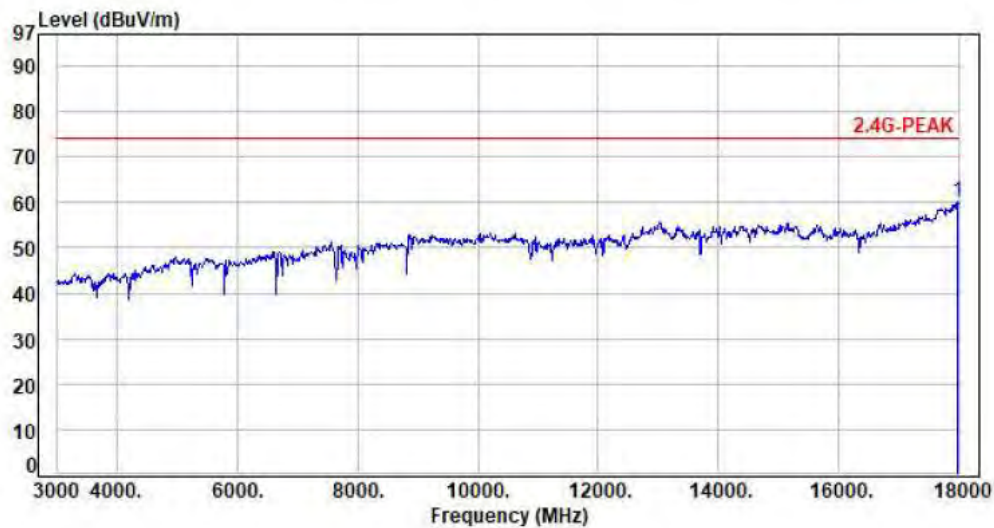


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17955.00	14.78	45.29	60.07	74.00	-13.93	Peak	100	20	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 2, CH01	Detector	:	Average

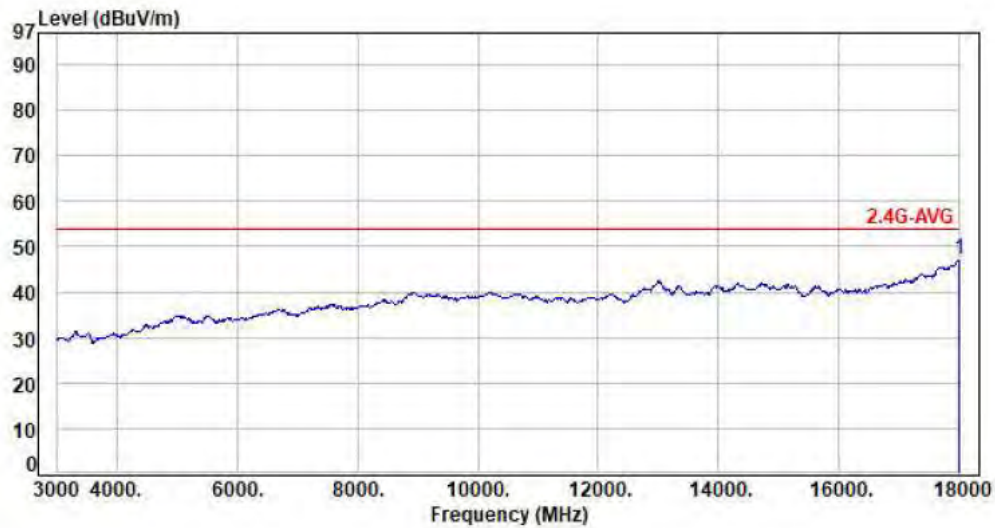

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17999.00	14.85	32.33	47.18	54.00	-6.82	Average	100	309	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 2, CH01	Detector	:	Peak

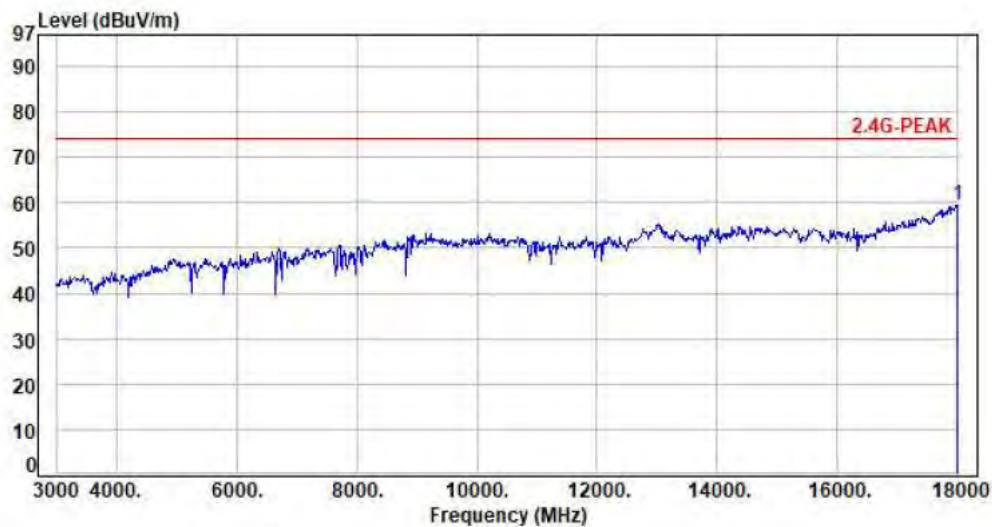

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17985.00	14.83	44.57	59.40	74.00	-14.60	Peak	100	19	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 2, CH01	Detector	:	Average

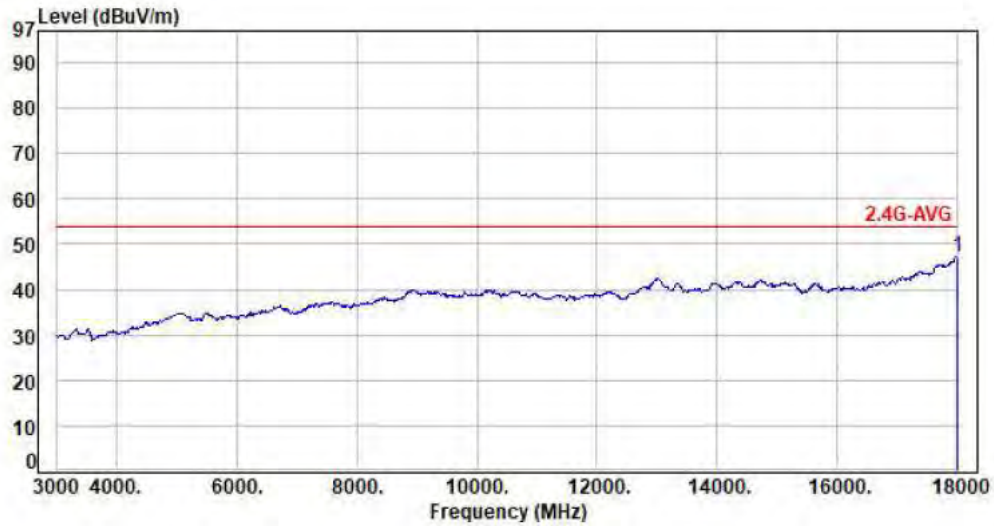


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17985.00	14.83	32.37	47.20	54.00	-6.80	Average	100	105	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 2, CH06	Detector	:	Peak

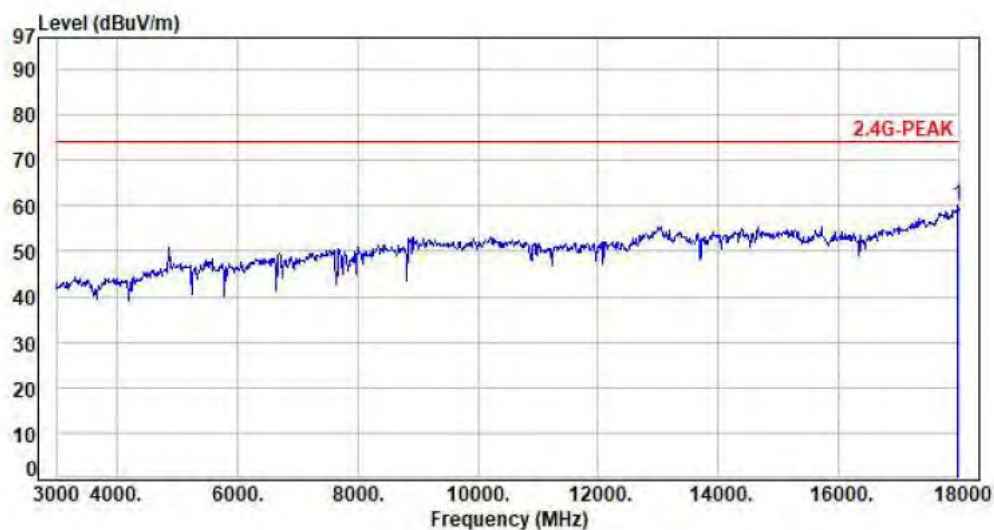


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17970.00	14.80	45.15	59.95	74.00	-14.05	Peak	100	54	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 2, CH06	Detector	:	Average

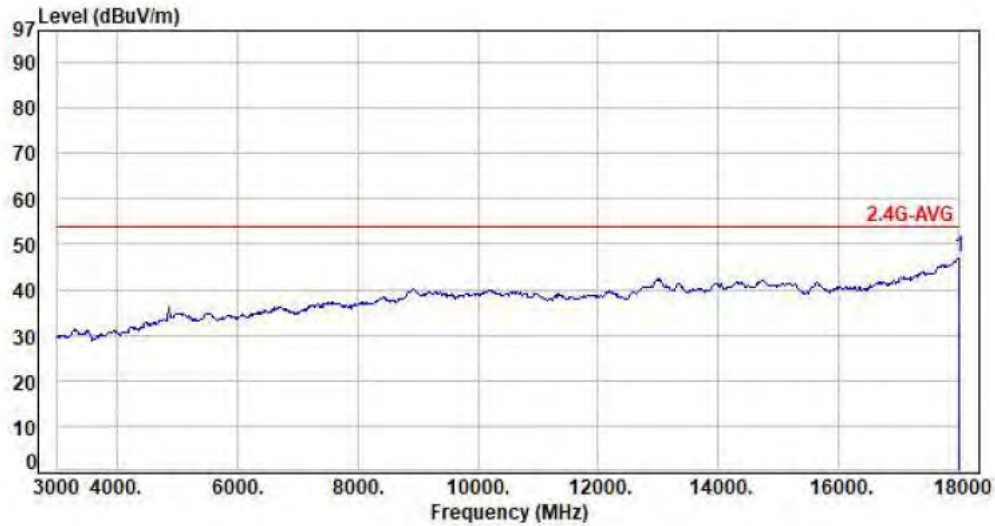


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17999.00	14.85	32.32	47.17	54.00	-6.83	Average	100	146	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 2, CH06	Detector	:	Peak

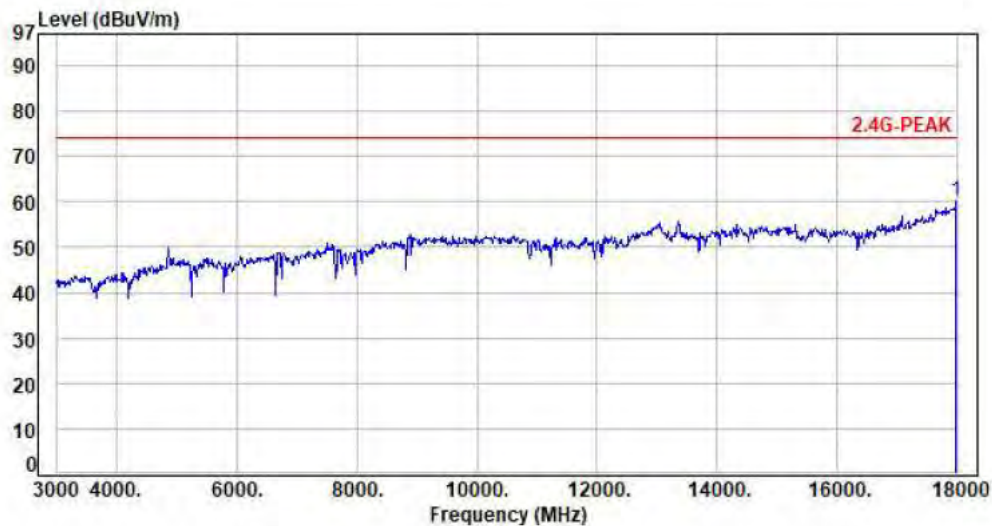

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17970.00	14.80	45.24	60.04	74.00	-13.96	Peak	100	293	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 2, CH06	Detector	:	Average

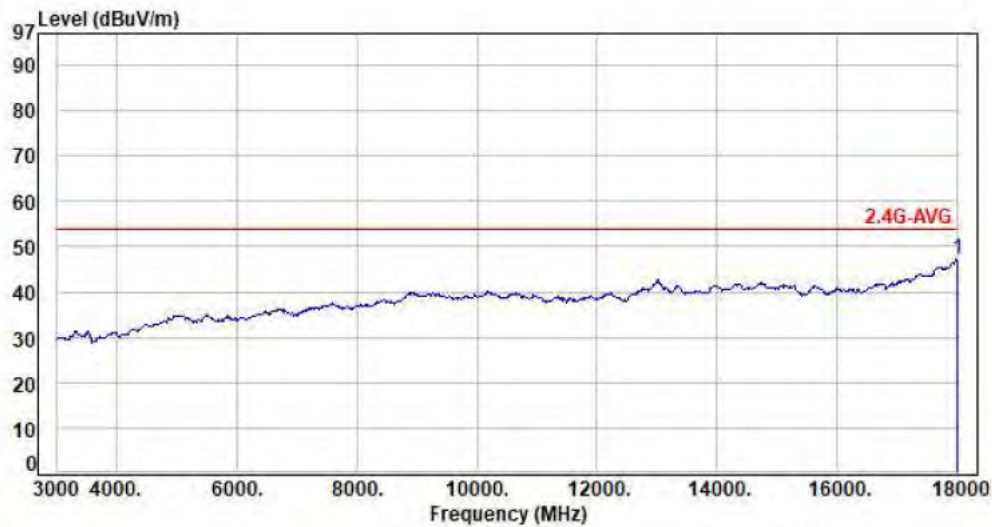

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17985.00	14.83	32.43	47.26	54.00	-6.74	Average	100	69	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 2, CH11	Detector	:	Peak

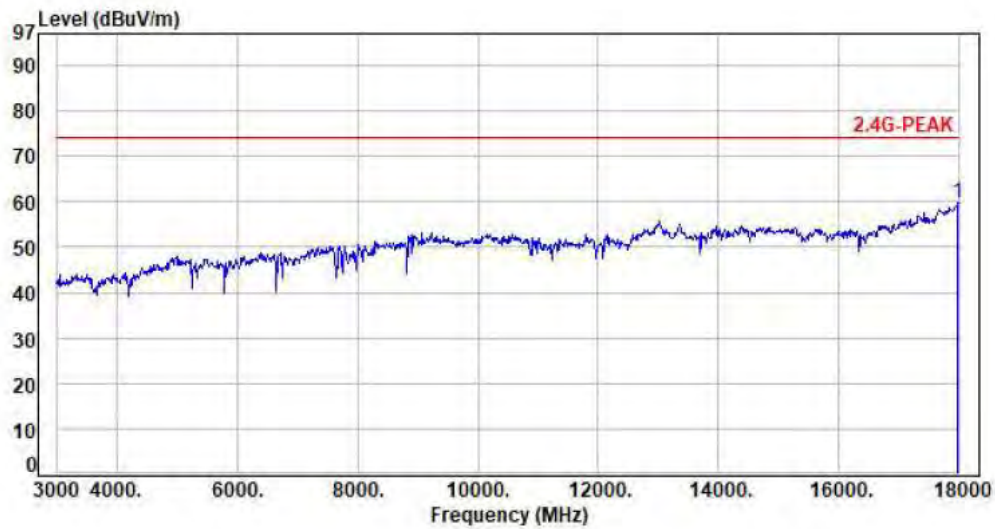


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17970.00	14.80	44.90	59.70	74.00	-14.30	Peak	100	274	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, CH11	Detector	: Average

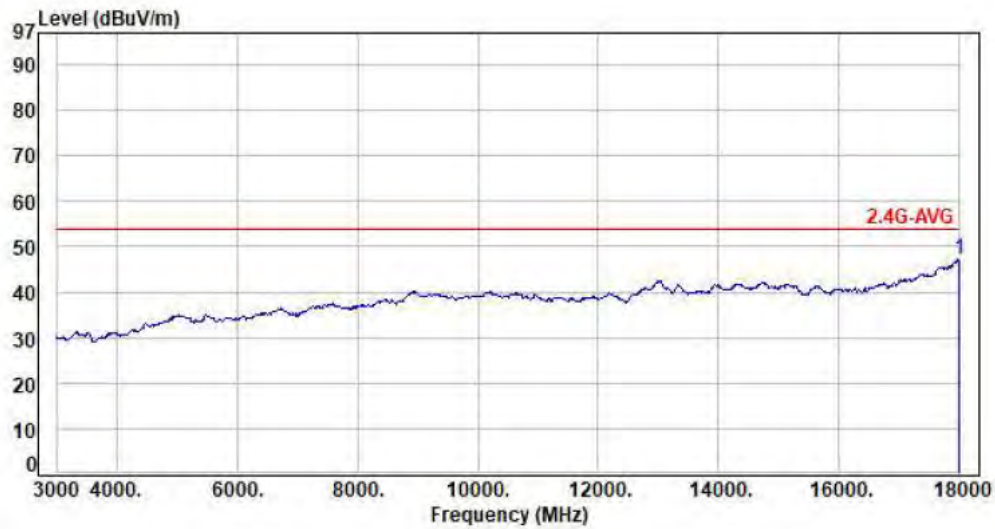

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17999.00	14.85	32.48	47.33	54.00	-6.67	Average	100	207	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 2, CH11	Detector	:	Peak

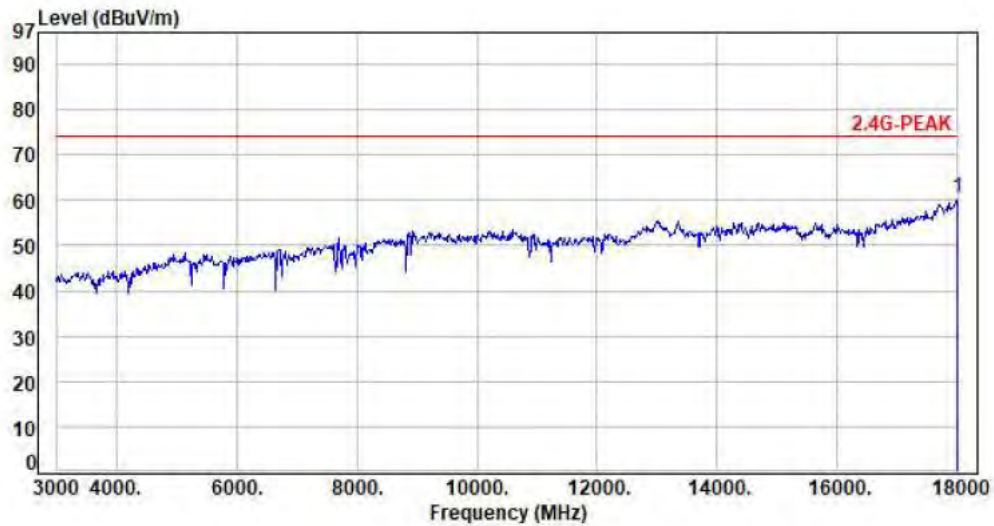


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17999.00	14.85	45.79	60.64	74.00	-13.36	Peak	100	302	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 2, CH11	Detector	:	Average

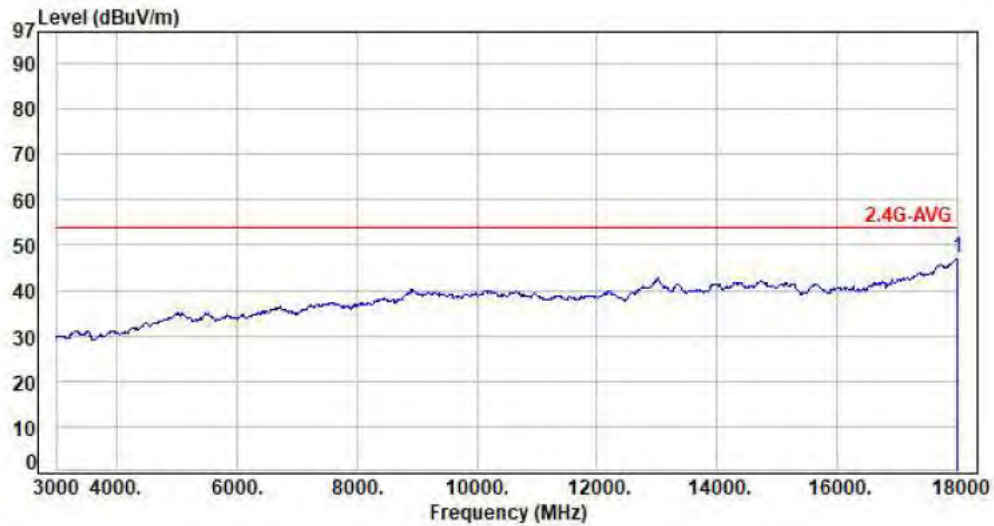


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17999.00	14.85	32.35	47.20	54.00	-6.80	Average	100	42	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 3, CH01	Detector	:	Peak

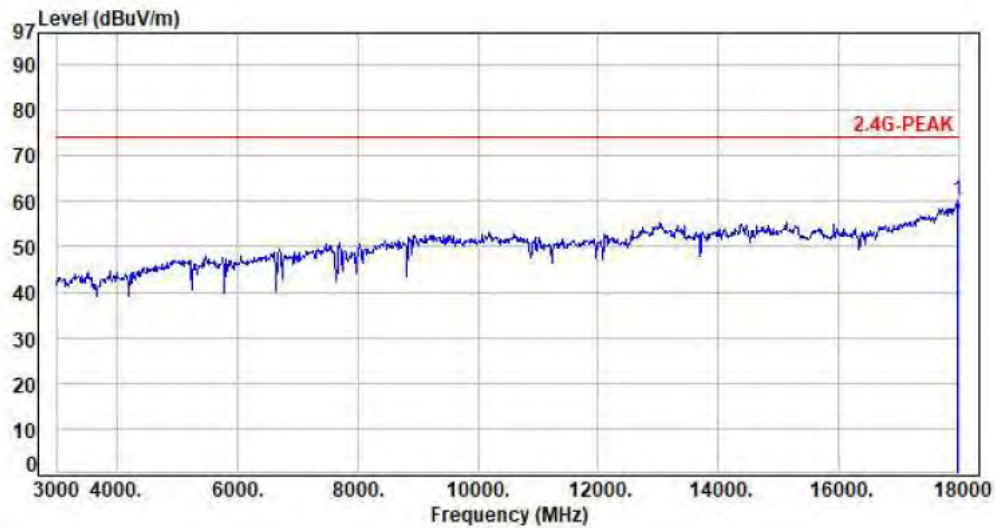

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17970.00	14.80	45.33	60.13	74.00	-13.87	Peak	100	206	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 3, CH01	Detector	:	Average

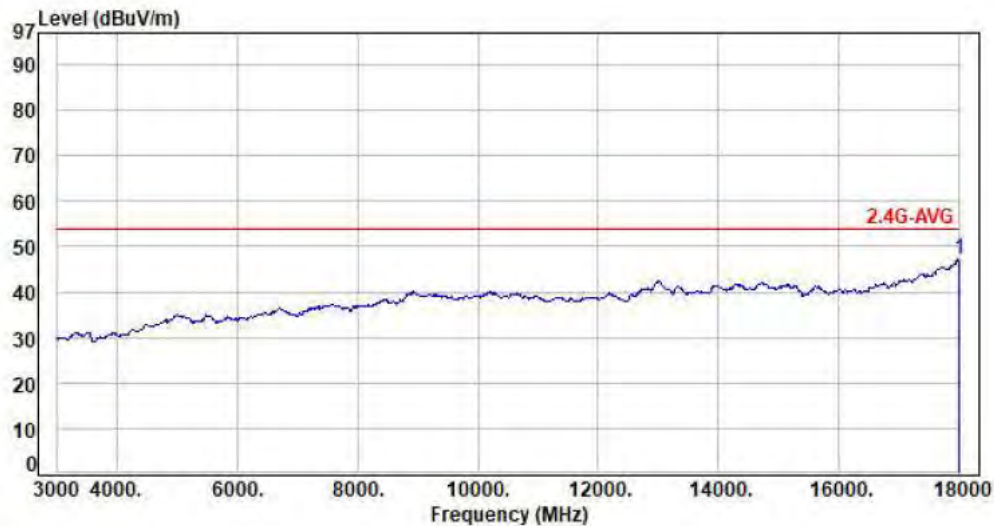

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17999.00	14.85	32.49	47.34	54.00	-6.66	Average	100	153	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 3, CH01	Detector	:	Peak

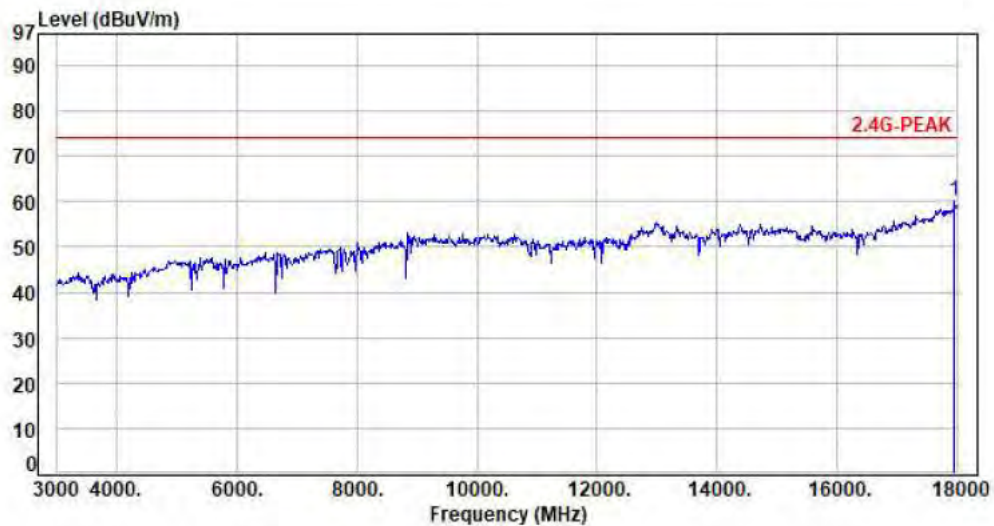


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17940.00	14.74	45.31	60.05	74.00	-13.95	Peak	100	351	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 3, CH01	Detector	:	Average

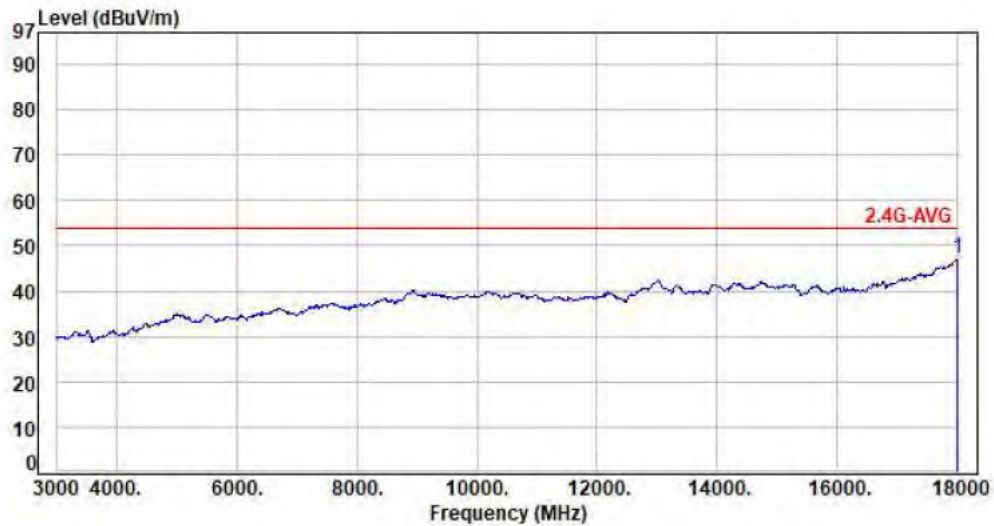

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17985.00	14.83	32.30	47.13	54.00	-6.87	Average	100	146	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 3, CH06	Detector	:	Peak

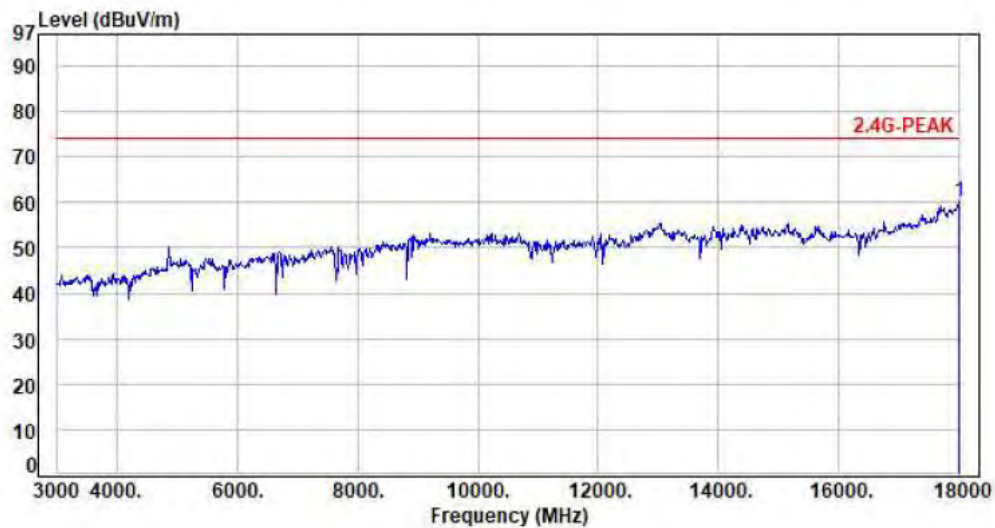


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17985.00	14.83	45.35	60.18	74.00	-13.82	Peak	100	37	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 3, CH06	Detector	:	Average

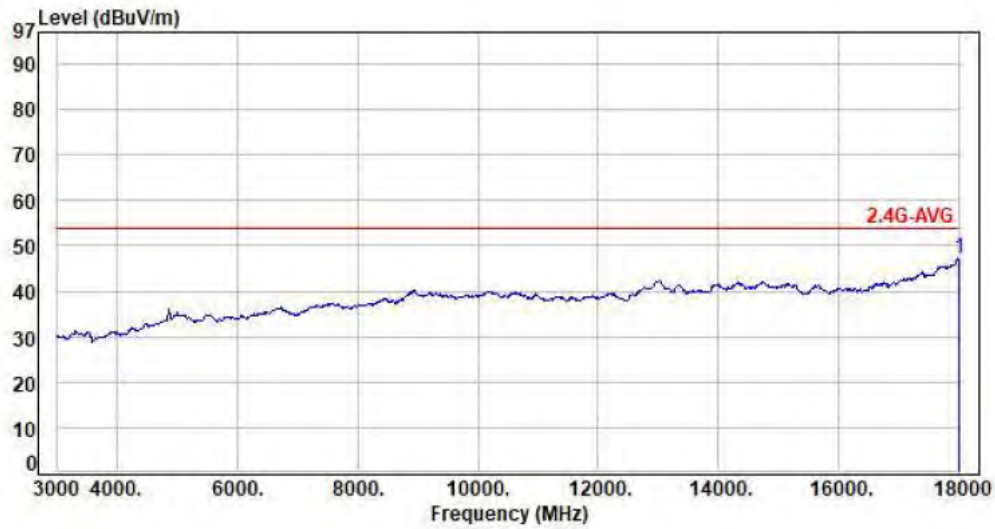


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17985.00	14.83	32.45	47.28	54.00	-6.72	Average	100	15	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 3, CH06	Detector	:	Peak

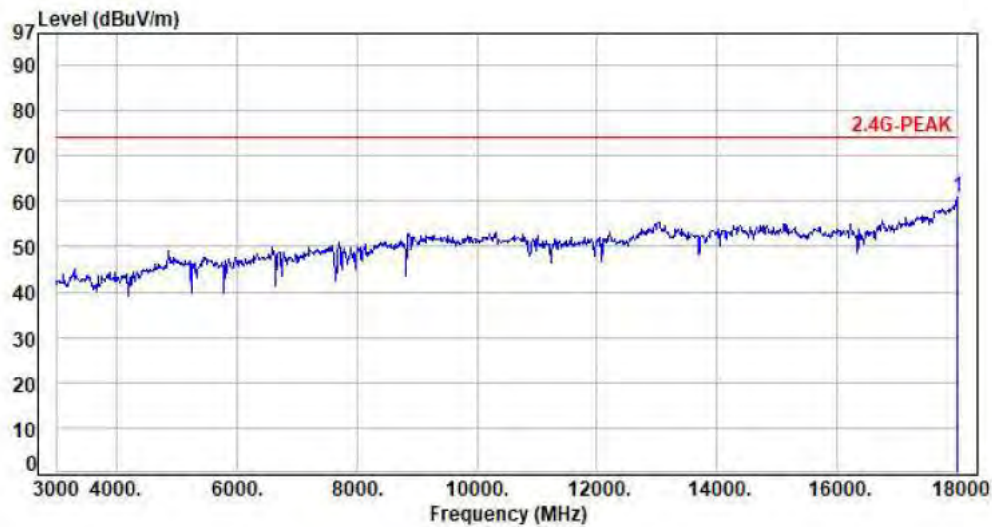


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17985.00	14.83	45.87	60.70	74.00	-13.30	Peak	100	211	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 3, CH06	Detector	:	Average

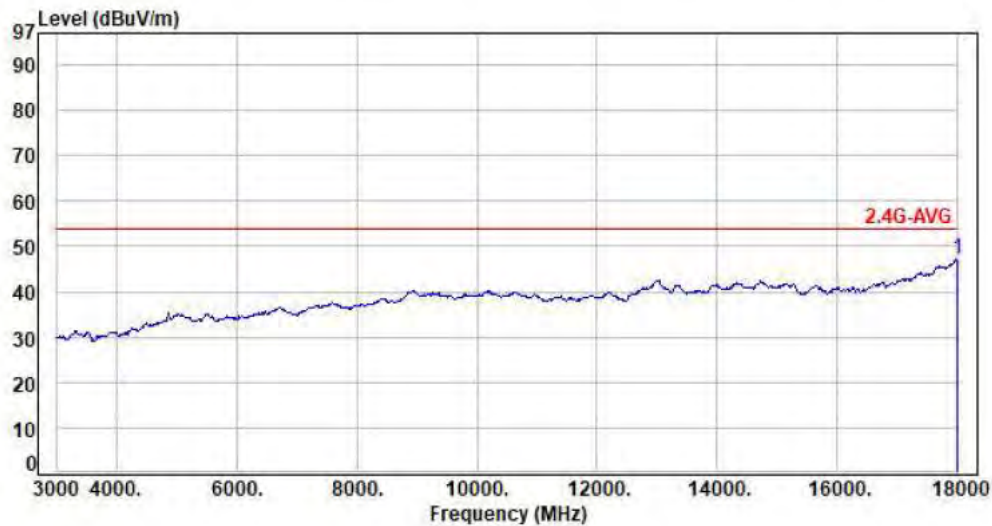


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17985.00	14.83	32.42	47.25	54.00	-6.75	Average	100	147	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 3, CH11	Detector	:	Peak

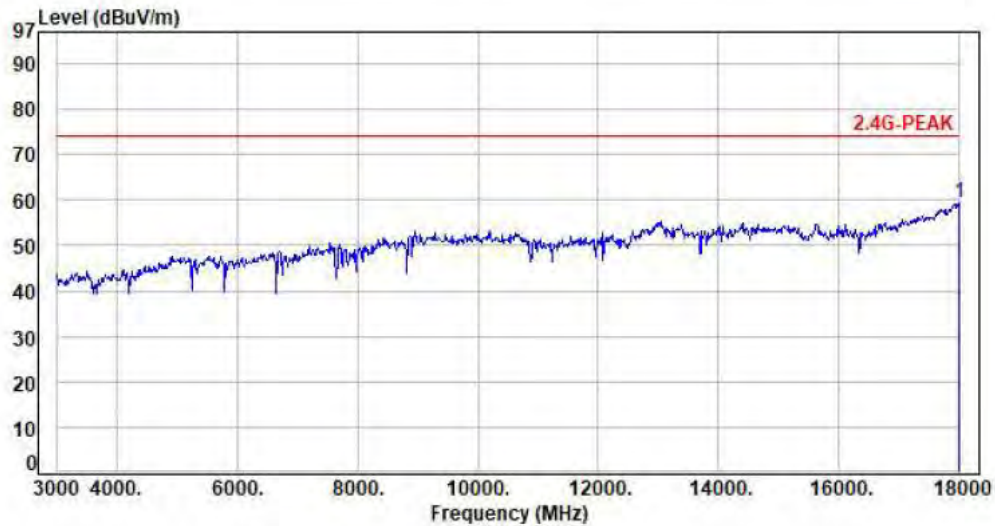


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17985.00	14.83	44.39	59.22	74.00	-14.78	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 3, CH11	Detector	:	Average

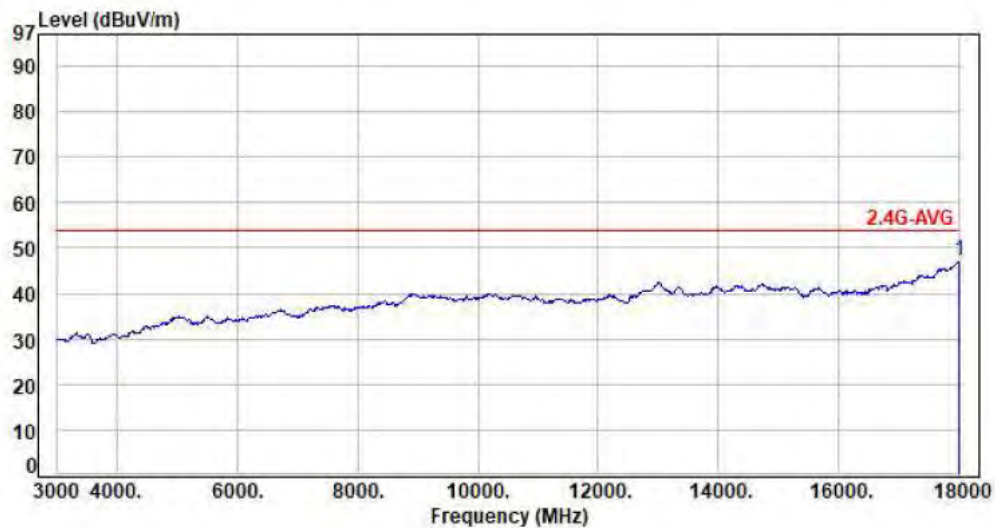

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17985.00	14.83	32.39	47.22	54.00	-6.78	Average	100	359	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 3, CH11	Detector	:	Peak

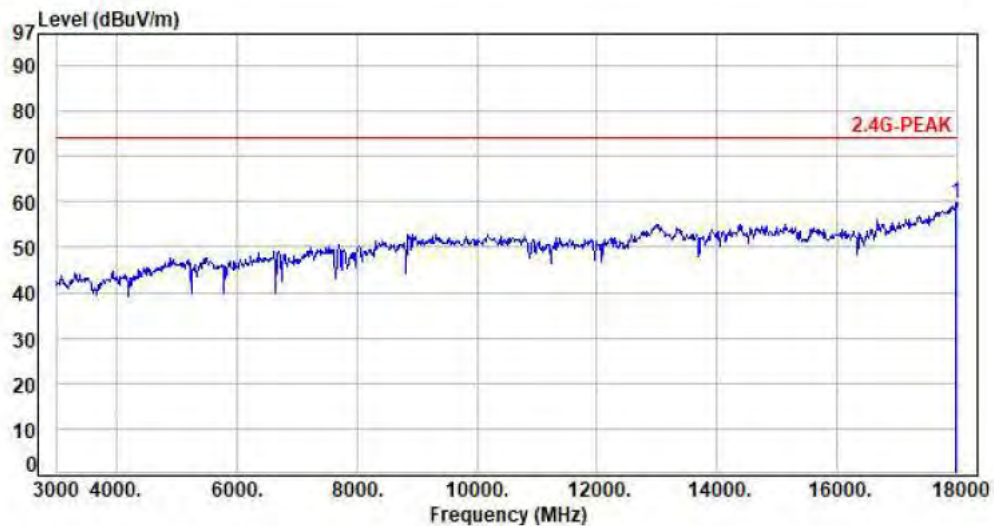

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17970.00	14.80	44.99	59.79	74.00	-14.21	Peak	100	69	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 3, CH11	Detector	:	Average

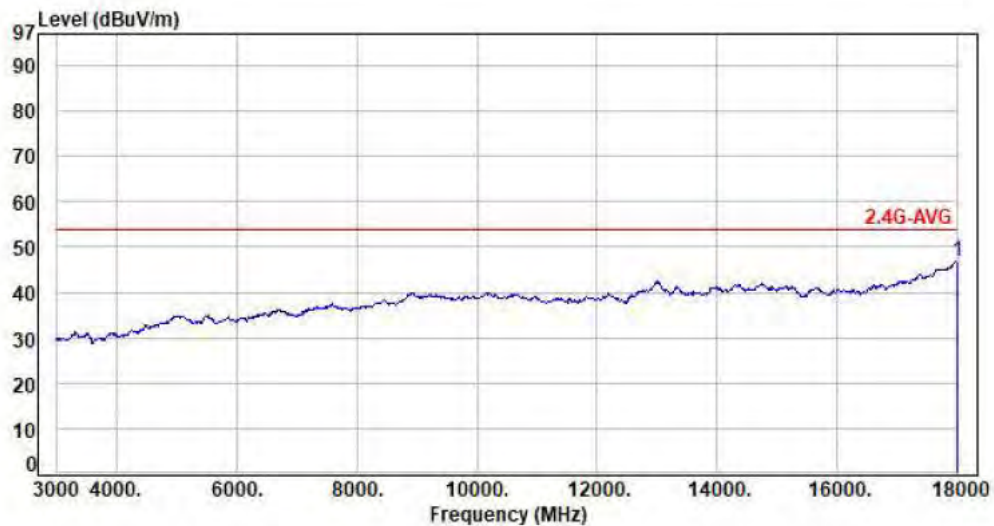


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17999.00	14.85	32.14	46.99	54.00	-7.01	Average	100	206	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 4, CH03	Detector	:	Peak

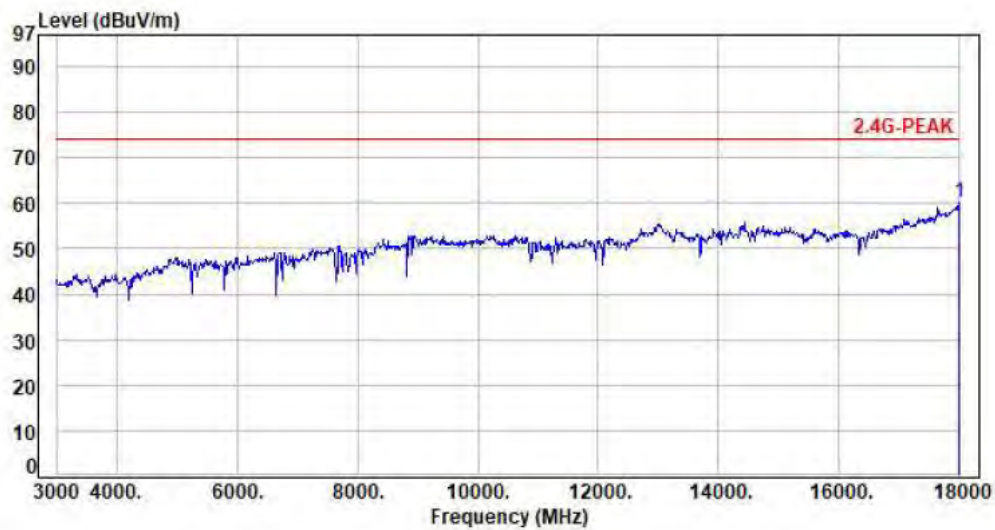


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17985.00	14.83	45.12	59.95	74.00	-14.05	Peak	100	353	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 4, CH03	Detector	:	Average

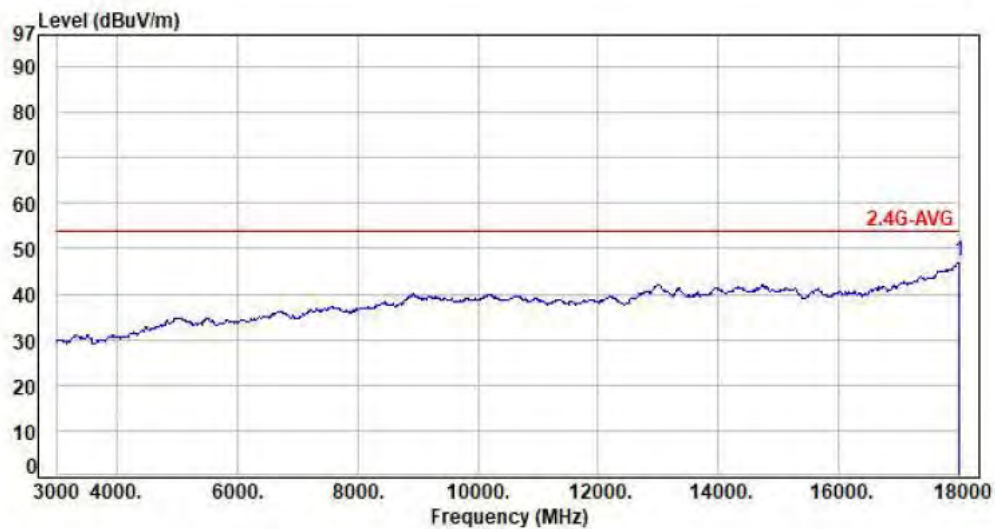


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17985.00	14.83	32.29	47.12	54.00	-6.88	Average	100	358	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 4, CH03	Detector	:	Peak

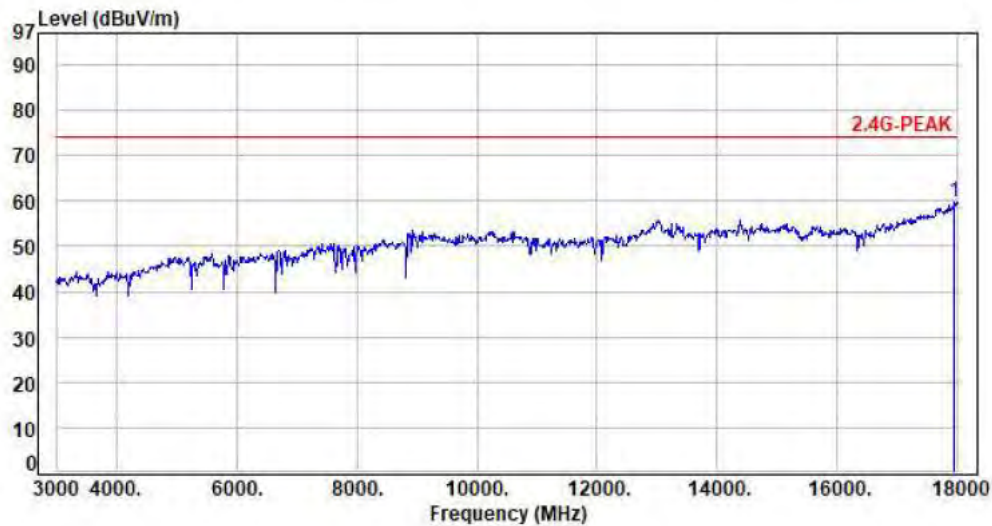


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17940.00	14.74	45.08	59.82	74.00	-14.18	Peak	100	244	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 4, CH03	Detector	:	Average

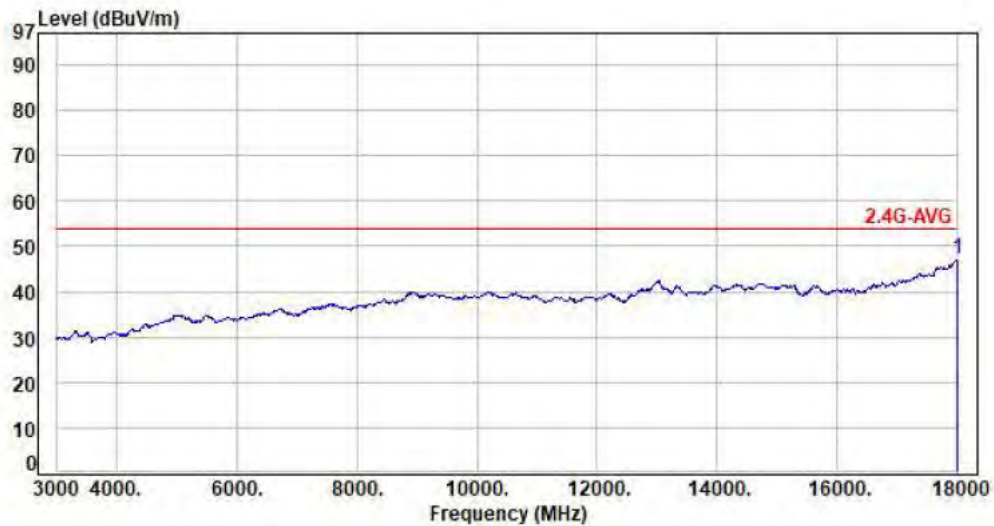


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17985.00	14.83	32.33	47.16	54.00	-6.84	Average	100	108	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 4, CH06	Detector	:	Peak

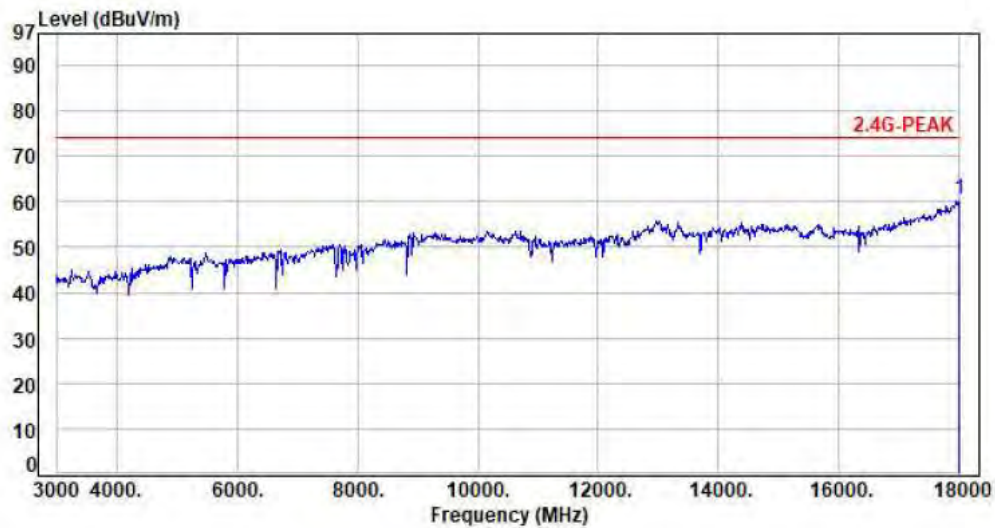


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17999.00	14.85	45.50	60.35	74.00	-13.65	Peak	100	268	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 4, CH06	Detector	:	Average

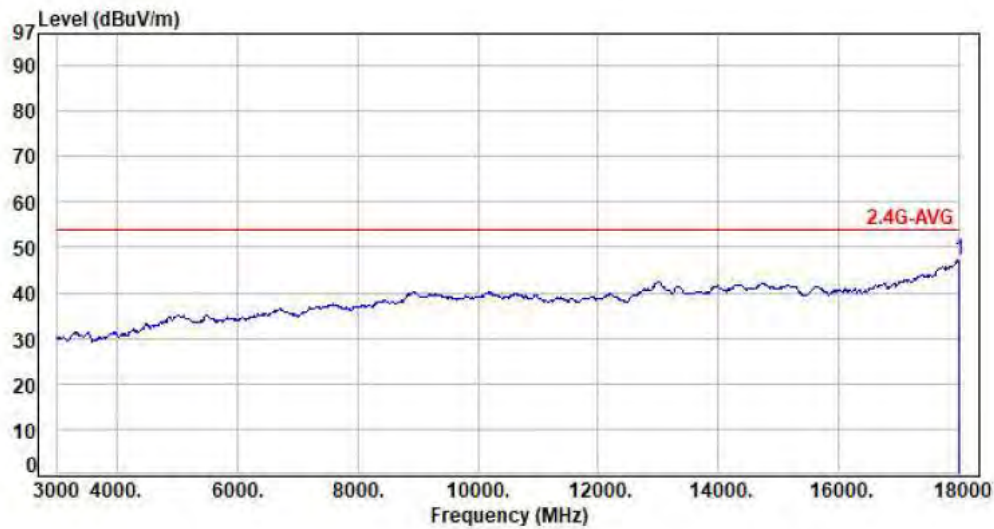


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17985.00	14.83	32.54	47.37	54.00	-6.63	Average	100	309	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 4, CH06	Detector	:	Peak

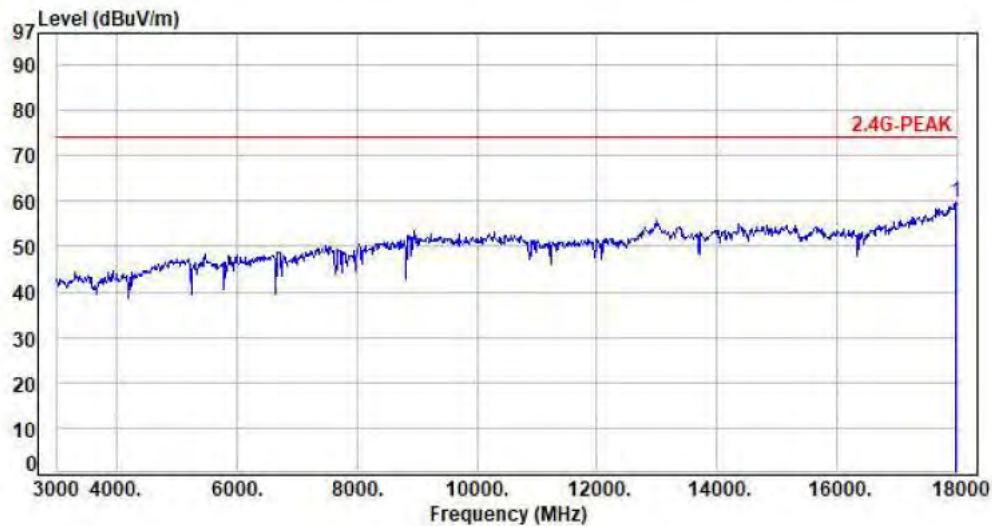


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17970.00	14.80	44.84	59.64	74.00	-14.36	Peak	100	25	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 4, CH06	Detector	:	Average

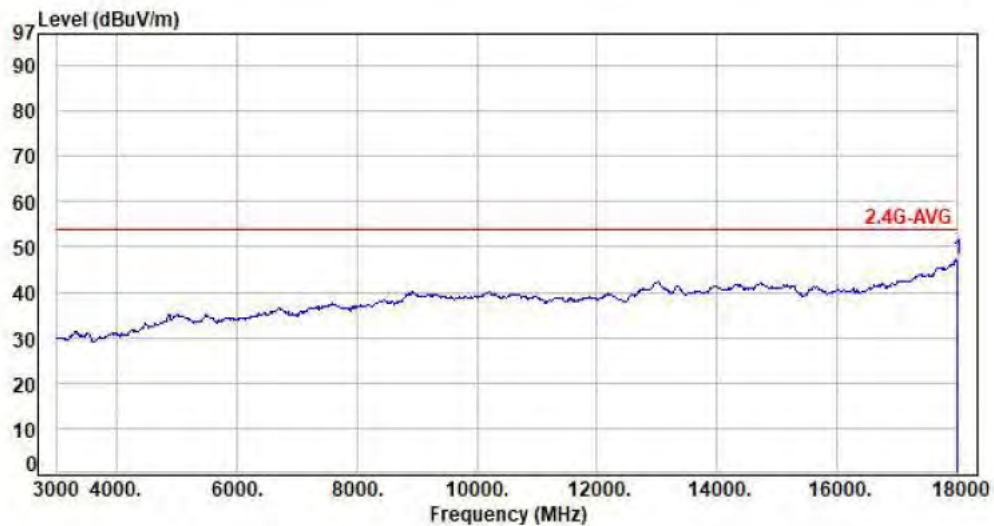

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17985.00	14.83	32.38	47.21	54.00	-6.79	Average	100	31	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 4, CH09	Detector	:	Peak

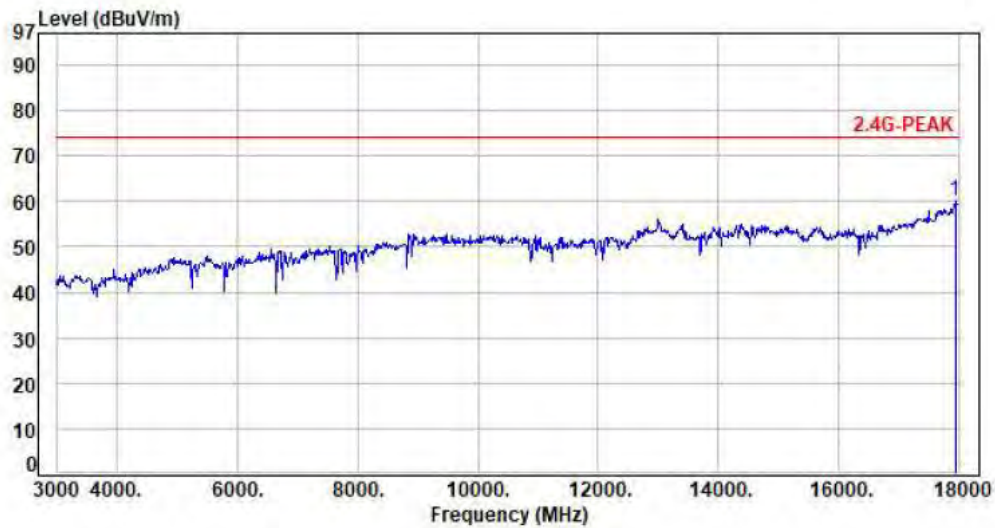


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17925.00	14.69	45.31	60.00	74.00	-14.00	Peak	100	50	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 4, CH09	Detector	:	Average

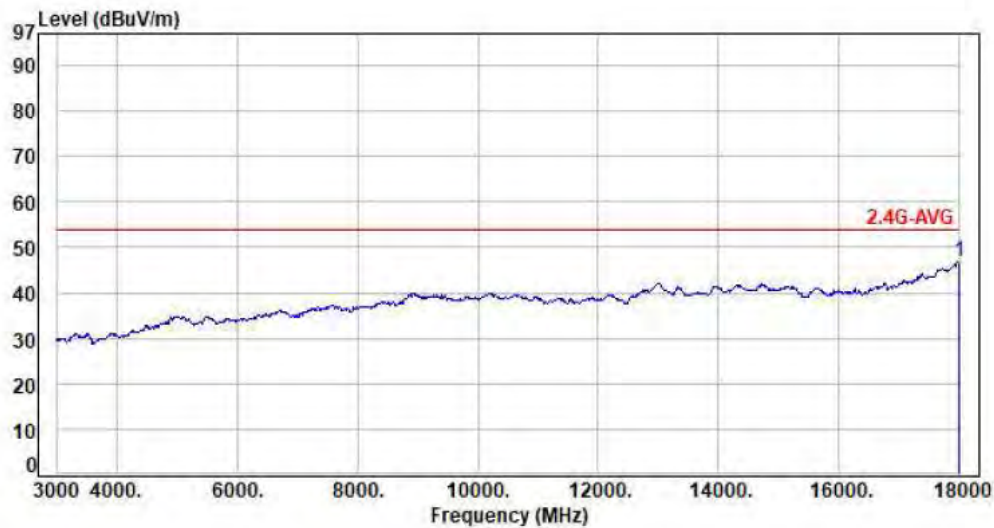

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17999.00	14.85	32.13	46.98	54.00	-7.02	Average	100	55	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 4, CH09	Detector	:	Peak

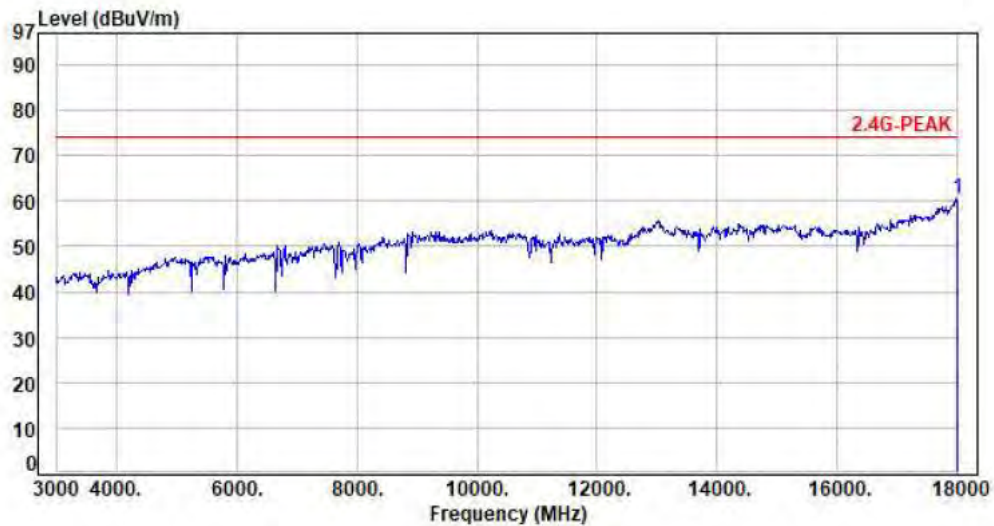


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17999.00	14.85	45.59	60.44	74.00	-13.56	Peak	100	106	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 4, CH09	Detector	:	Average

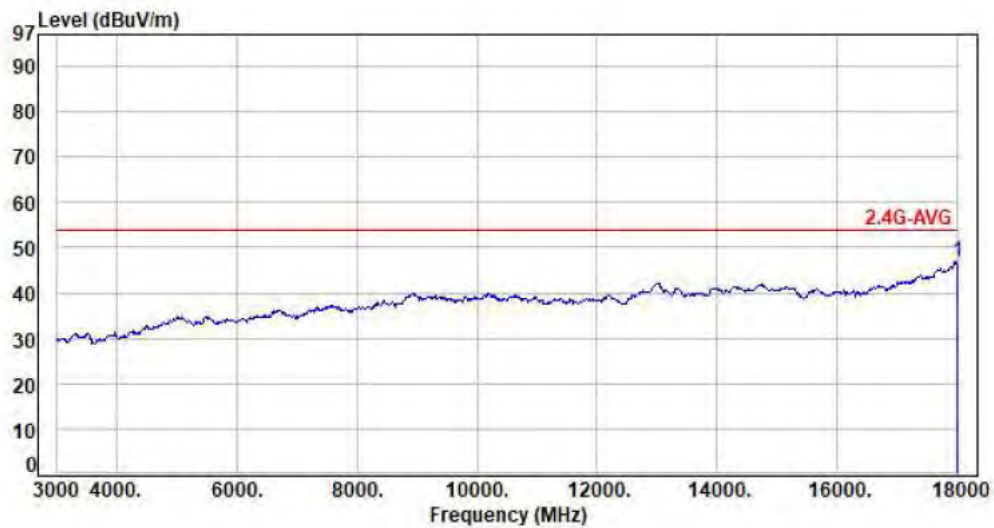


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17985.00	14.83	32.18	47.01	54.00	-6.99	Average	100	350	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

**6.9 Test Result and Data (18GHz ~ 25GHz)**

Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 2, CH01			

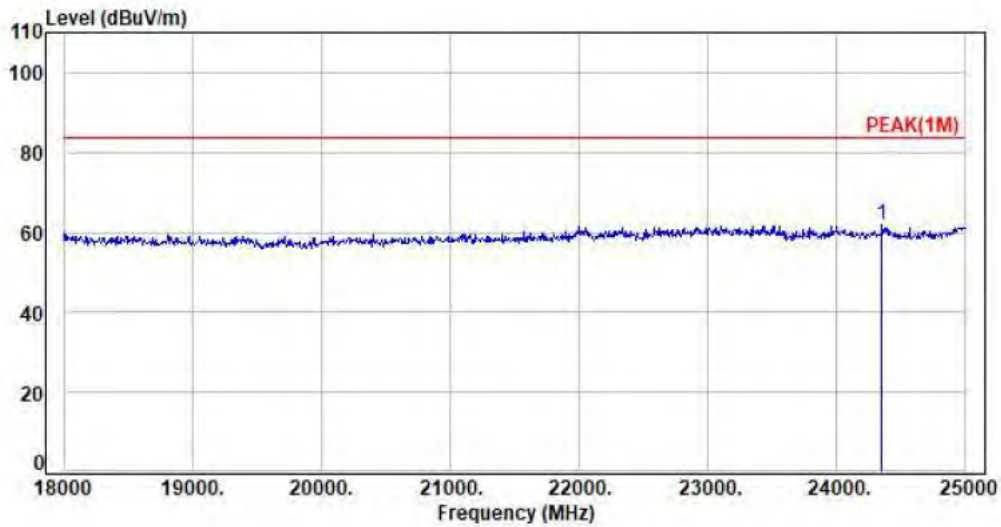

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	24349.00	9.98	51.74	61.72	83.52	-21.80	Peak	100	210	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	DC 12V From Adapter (AC 120V/60Hz)	Pol/Phase	:	HORIZONTAL
Test Mode	:	Mode 2, CH01			

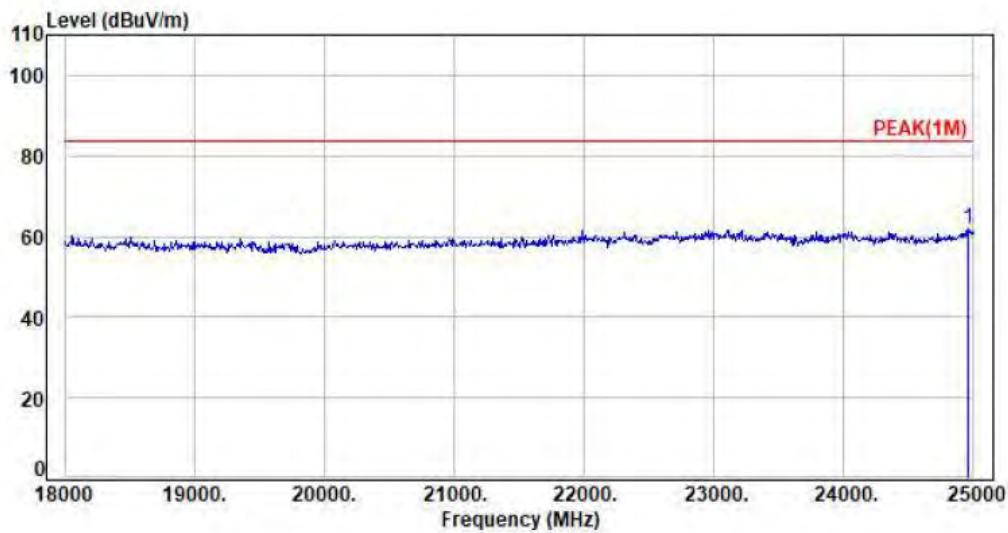

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	24958.00	9.97	52.05	62.02	83.52	-21.50	Peak	100	134	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



6.10 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. Test of Conducted Spurious Emission

7.1 Test Limit

According to the methods defined in ANSI C63.10-2020 Section 11.11.1


Below -20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

7.2 Test Procedure

According to the methods defined in ANSI C63.10-2020 Section 11.11.2 & 11.11.3



- The transmitter output was connected to the spectrum analyzer via a low loss cable.
- Set RBW of spectrum analyzer to 100 kHz and VBW of spectrum analyzer to 300 kHz with convenient frequency span including 100 kHz bandwidth from band edge.
- Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20dB relative to the maximum measured in-band peak PSD level.
- The band edges was measured and recorded.

7.3 Test Setup Layout




7.4 Test Result and Data


Note: Test plots refers to the following pages.

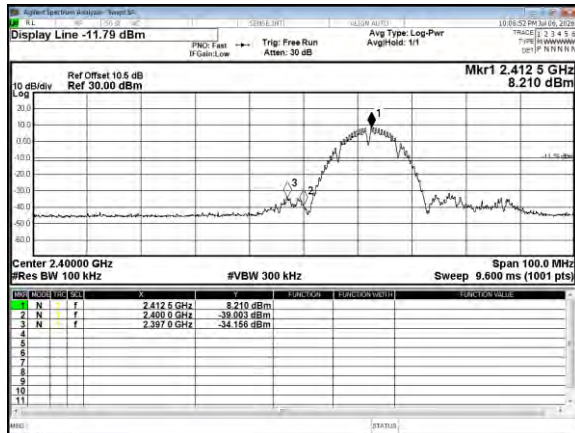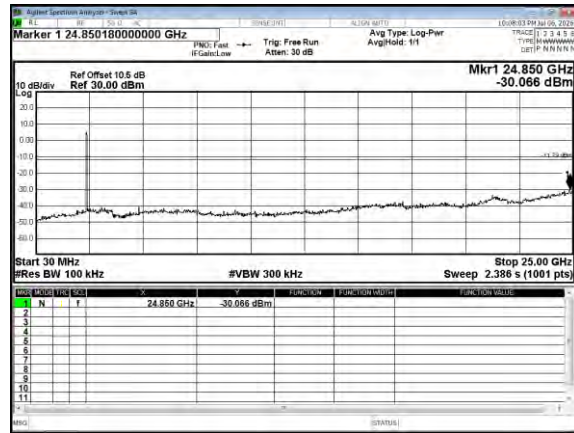Modulation Type: 802.11b
CH01Modulation Type: 802.11b
CH01


CH06

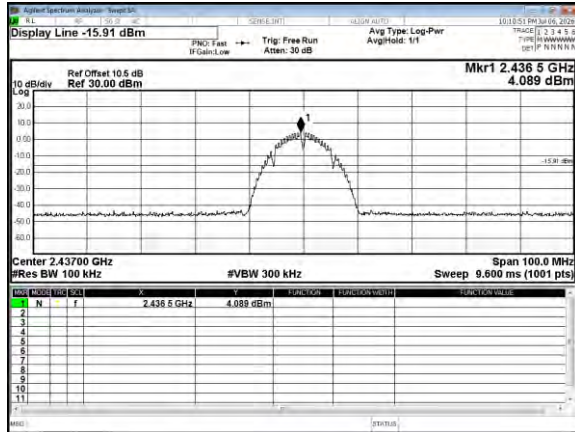


CH06


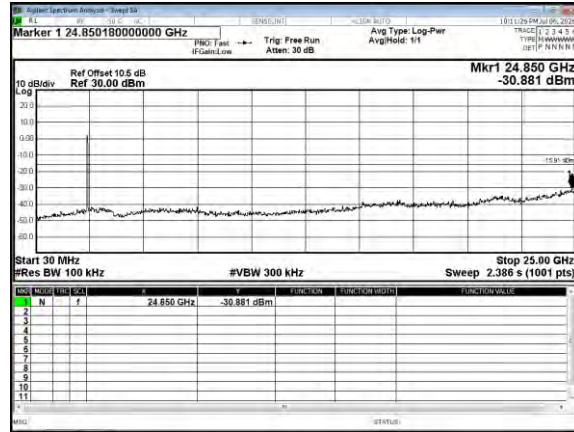


CH11

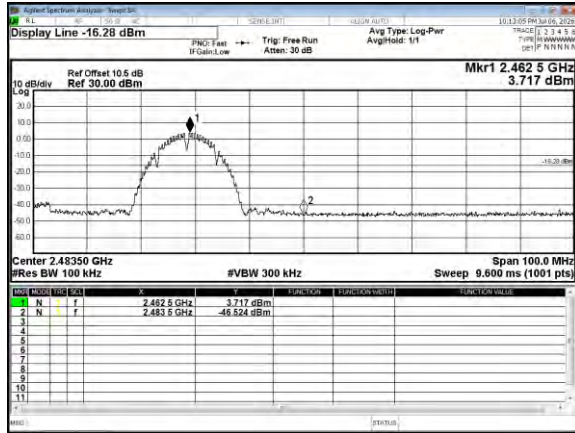


CH11

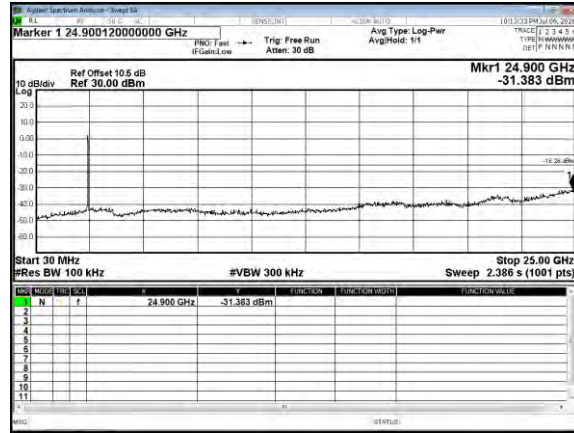


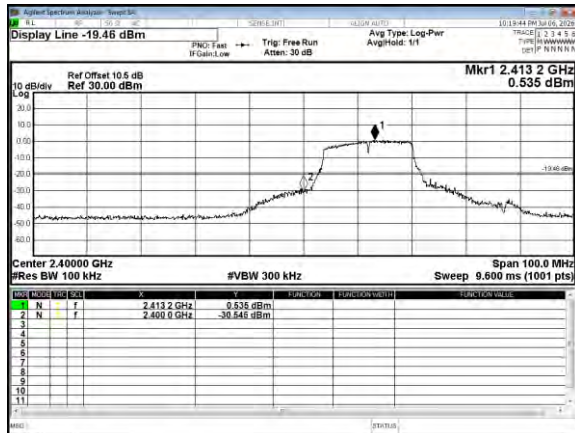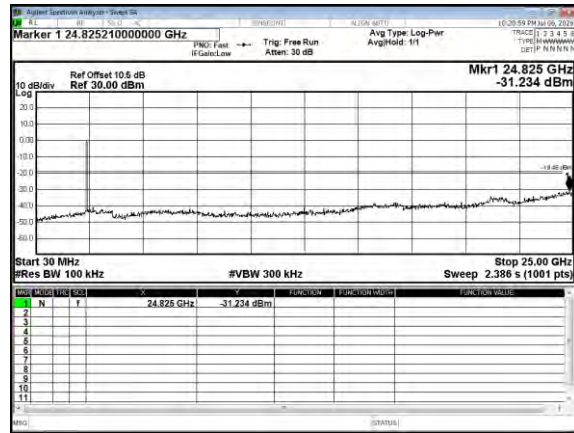Modulation Type: 802.11g
CH01Modulation Type: 802.11g
CH01


CH06

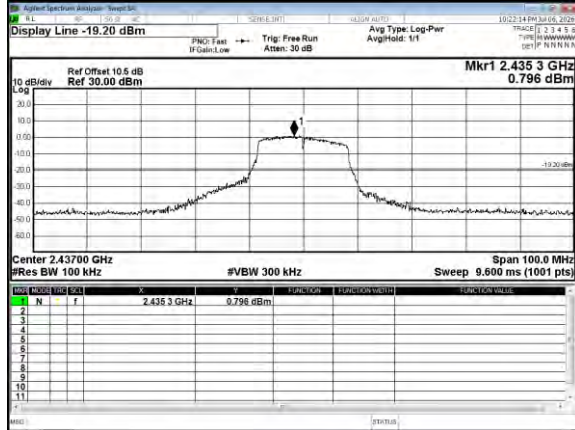


CH06


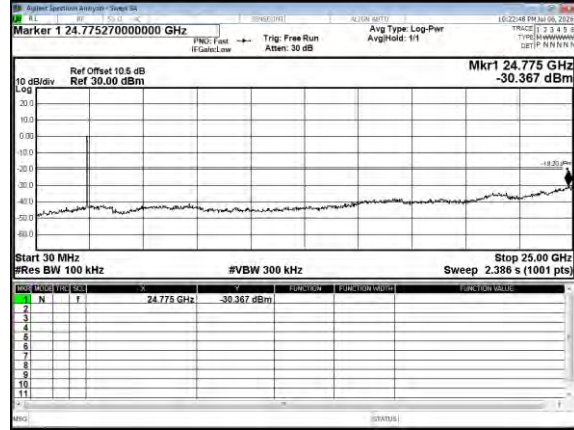


CH11

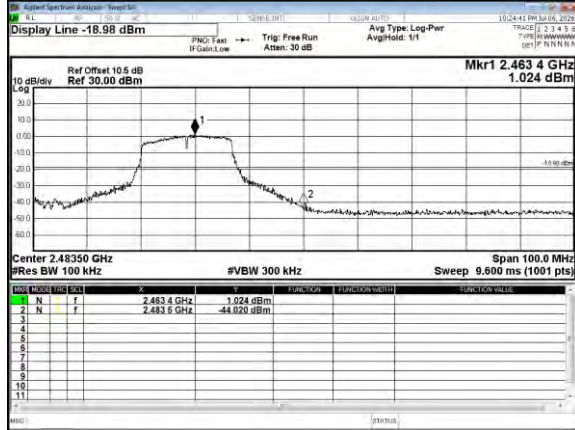


CH11

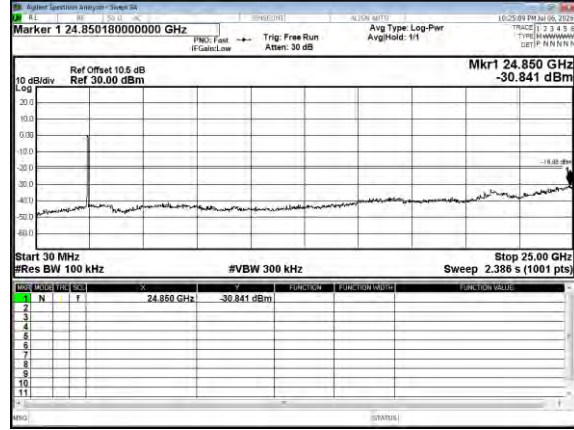


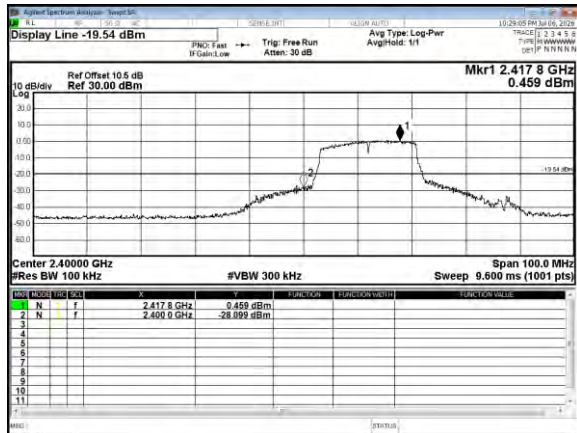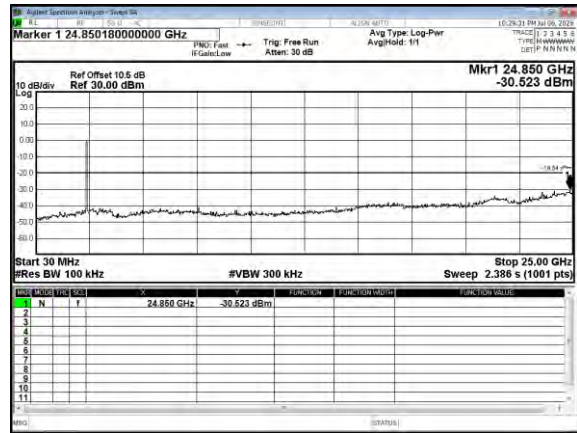Modulation Type: 802.11n HT20
CH01Modulation Type: 802.11n HT20
CH01


CH06

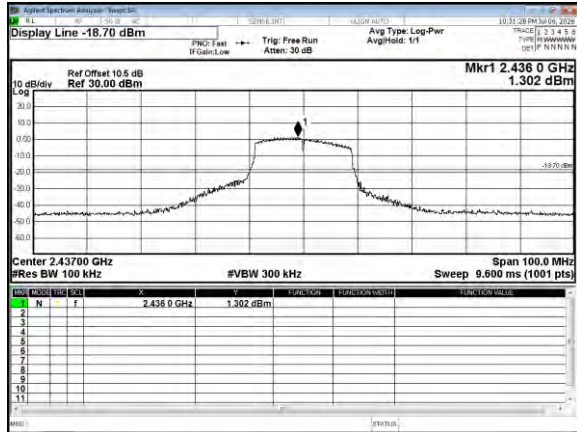


CH06


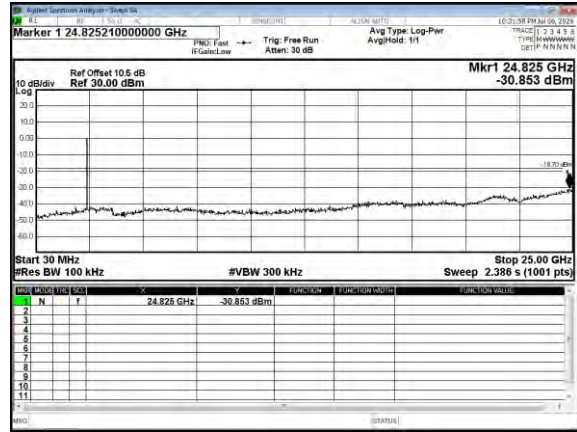


CH11

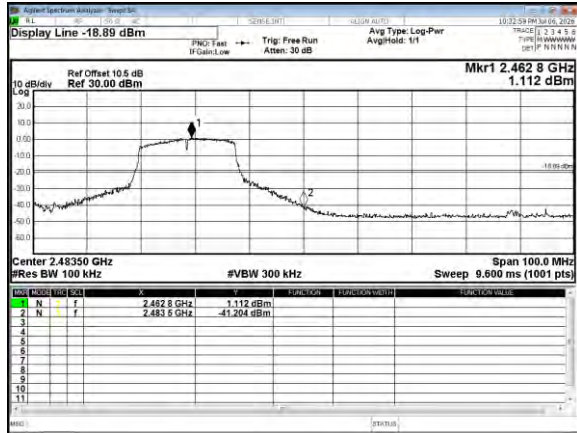


CH11

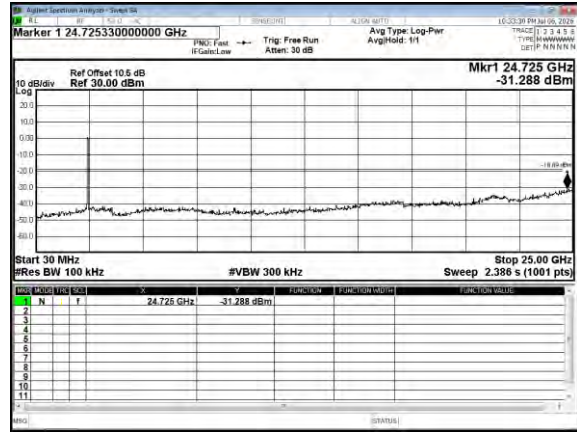


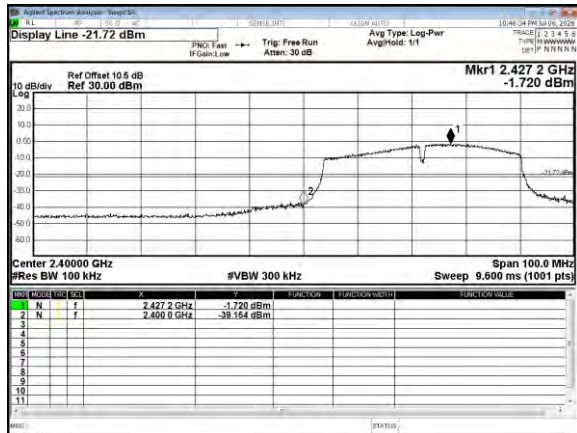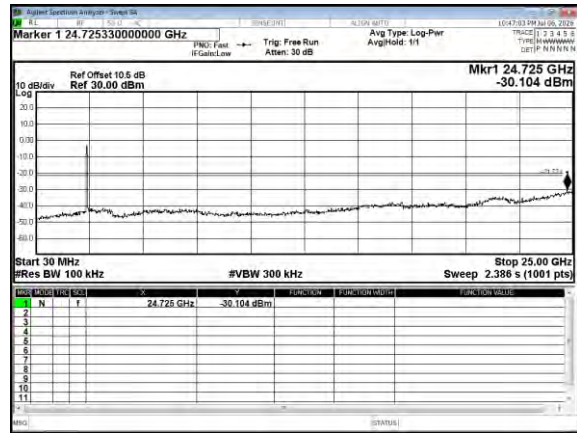Modulation Type: 802.11n HT40
CH03Modulation Type: 802.11n HT40
CH03


CH06

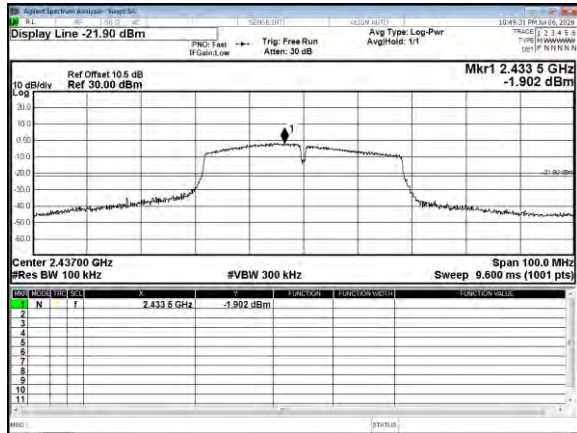


CH06

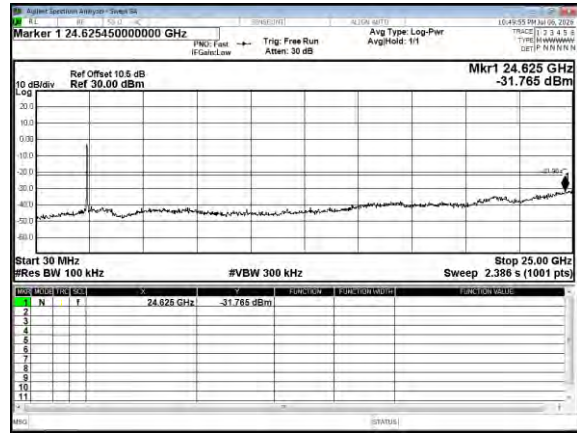

CH09

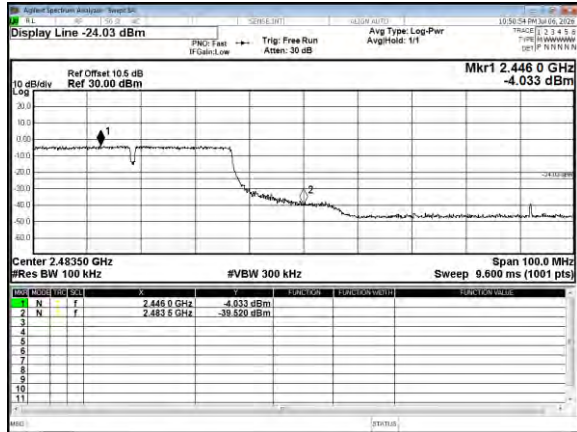

CH09

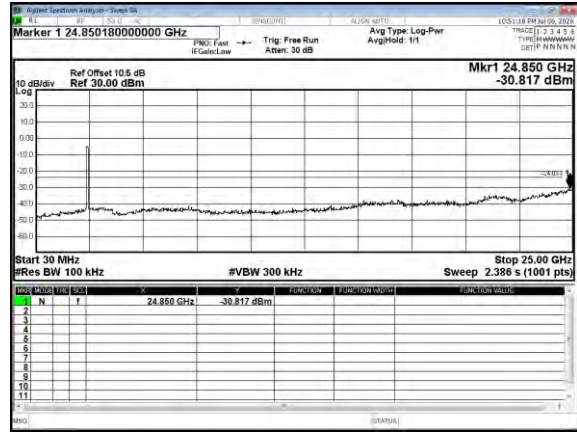



8. On Time, Duty Cycle and Measurement methods


8.1 Test Limit

None; for reporting purposes only.

8.2 Test Procedure

According to the methods defined in ANSI C63.10-2020 Section 11.6
Zero-Span Spectrum Analyzer Method.

8.3 Test Setup Layout




8.4 Test Result and Data


Modulation Type	On Time (ms)	Period Time (ms)	Duty Cycle (%)
11b, 1M	100.000	100.000	100.00%
11g, 6M	100.000	100.000	100.00%
11n HT20	100.000	100.000	100.00%
11n HT40	100.000	100.000	100.00%




Modulation Type: 802.11b (1Mbps)

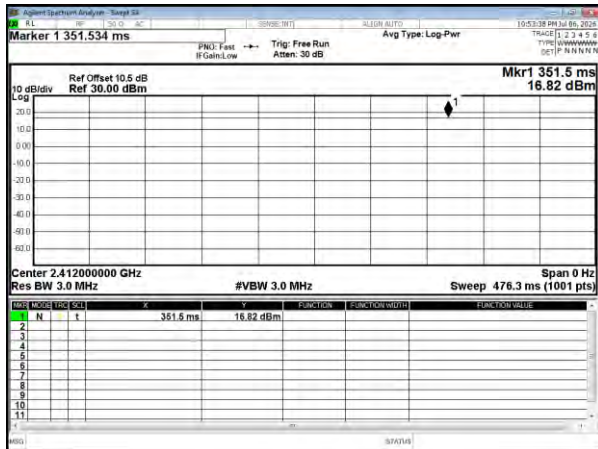


Modulation Type: 802.11g (6Mbps)

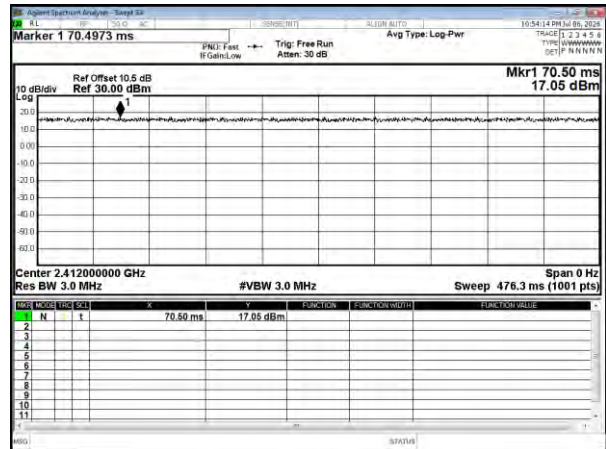

Modulation Type: 802.11n HT20 (6.5Mbps)

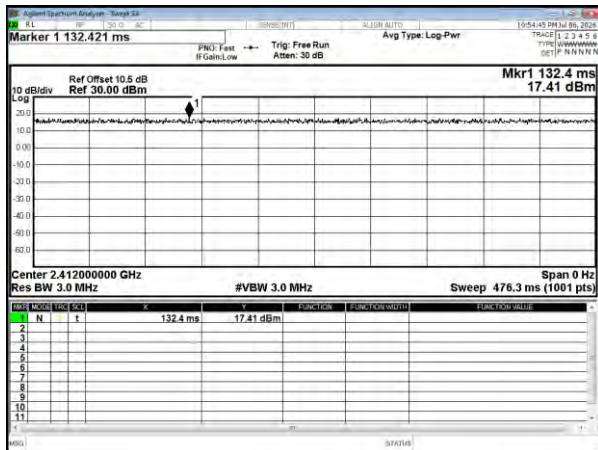

Modulation Type: 802.11n HT40 (13.5Mbps)

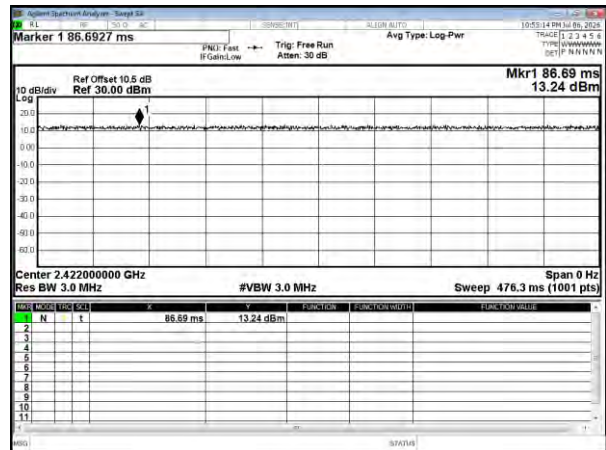



9. 6dB Bandwidth Measurement Data

9.1 Test Limit


The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

9.2 Test Procedures

According to the methods defined in ANSI C63.10-2020 Section 11.8

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.
- The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- The 6dB Bandwidth was measured and recorded.

9.3 Test Setup Layout




**9.4 Test Result and Data**


Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
11b	1	2412	8.58	0.5
	6	2437	8.12	0.5
	11	2462	8.14	0.5
11g	1	2412	16.48	0.5
	6	2437	15.80	0.5
	11	2462	16.45	0.5
802.11n HT20	1	2412	17.51	0.5
	6	2437	16.79	0.5
	11	2462	17.45	0.5
802.11n HT40	3	2422	27.08	0.5
	6	2437	30.80	0.5
	9	2452	36.58	0.5




Modulation Type: 802.11b
CH01

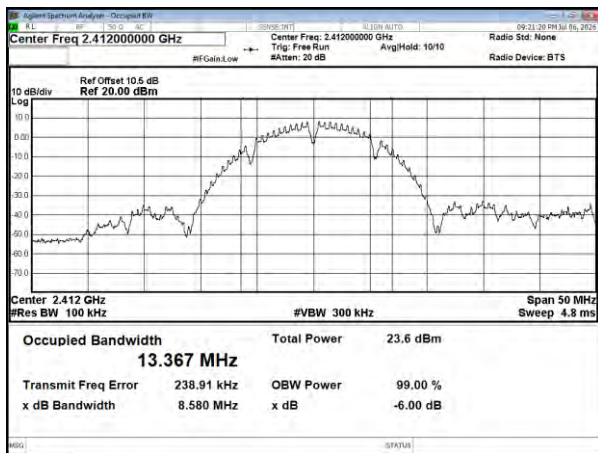


Modulation Type: 802.11g
CH01

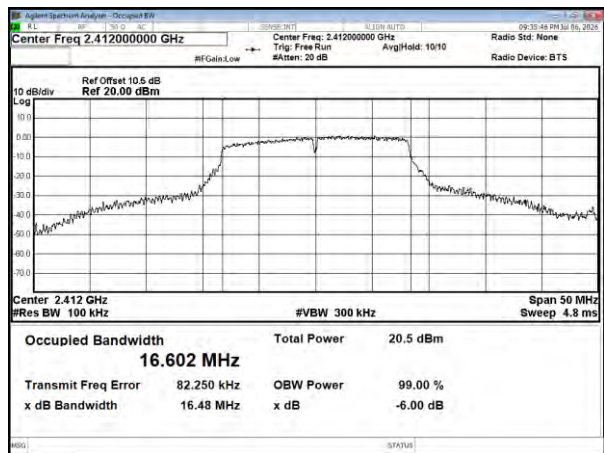


CH06

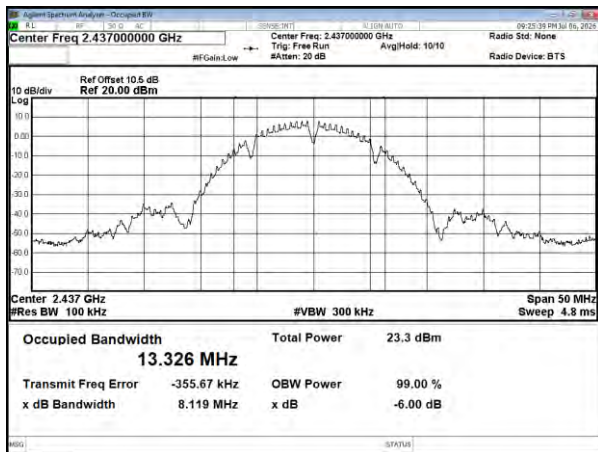


CH06

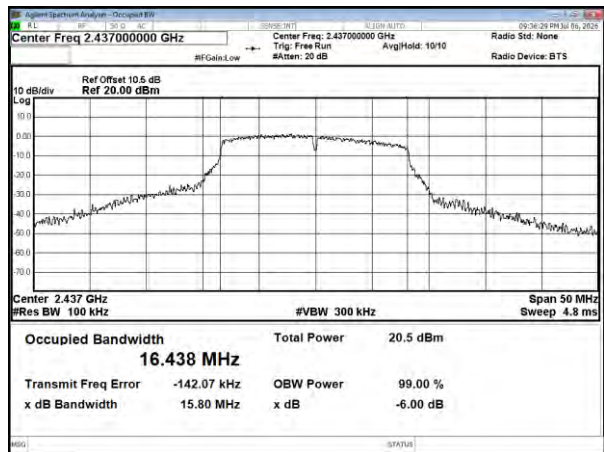

CH11

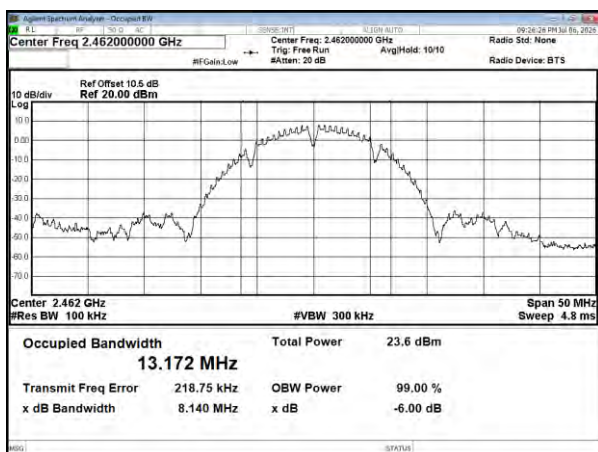


CH11

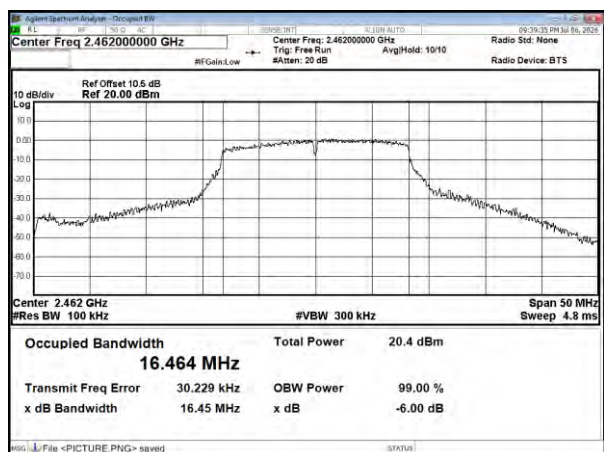





Modulation Type: 802.11n HT20
CH01

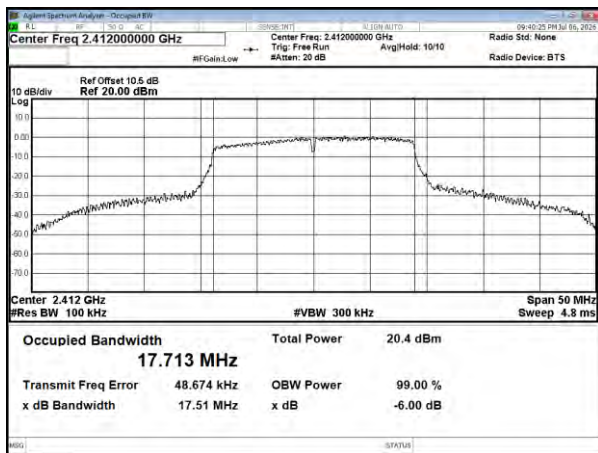


Modulation Type: 802.11n HT40
CH03

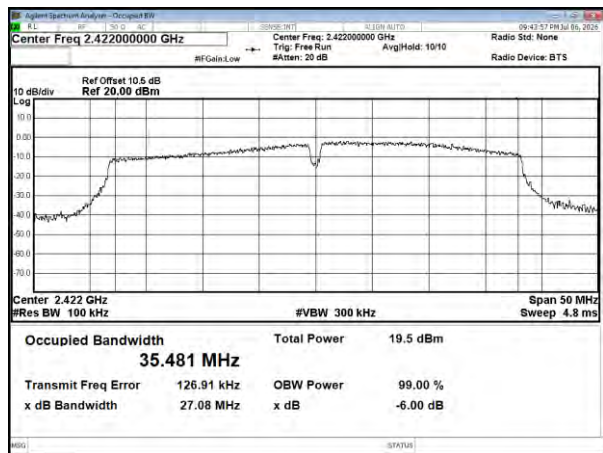


CH06

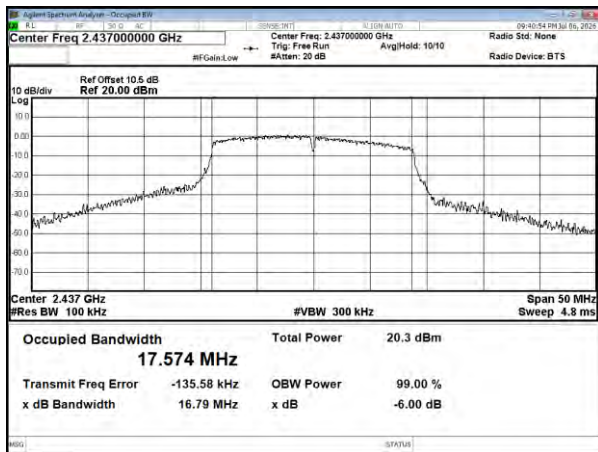


CH06

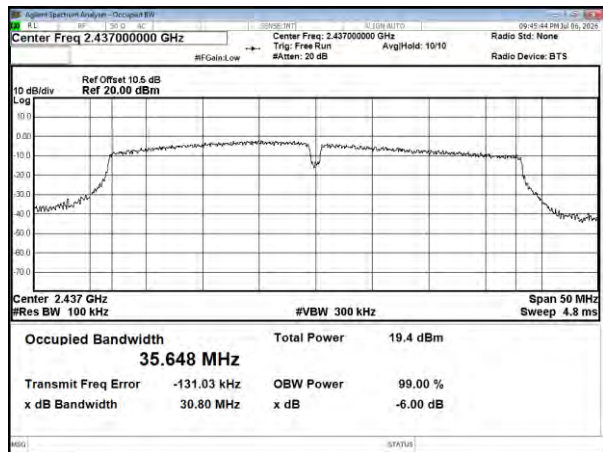

CH11

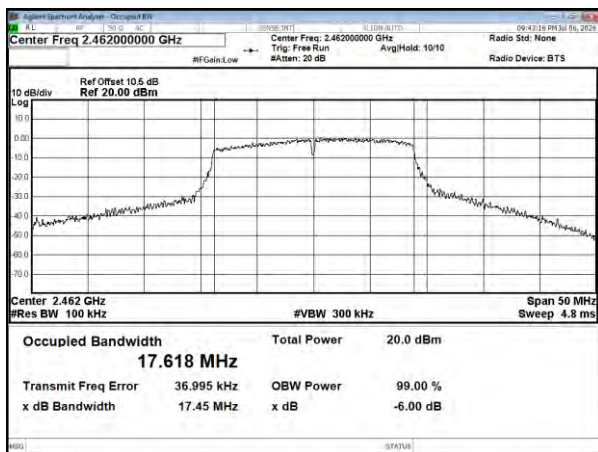

CH09

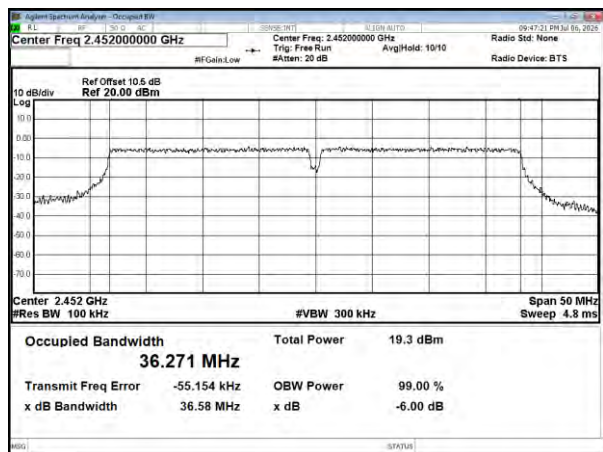



10. Maximum Peak Output Power

10.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.


If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

10.2 Test Procedures

According to the methods defined in ANSI C63.10-2020 Section 11.9.2.3.2

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

10.3 Test Setup Layout





10.4 Test Result and Data

Power Setting	Modulation Type	Channel	Frequency (MHz)	Conducted (peak) output power (dBm)	Conducted (peak) output power (mW)	Power Limit (dBm)
Default	IEEE 802.11b	1	2412	18.520	71.121	30.00
15		6	2437	14.280	26.792	30.00
15		11	2462	14.310	26.977	30.00
Default	IEEE 802.11g	1	2412	21.280	134.276	30.00
Default		6	2437	21.270	133.968	30.00
Default		11	2462	21.210	132.130	30.00
Default	IEEE 802.11n HT20	1	2412	21.130	129.718	30.00
Default		6	2437	21.190	131.522	30.00
Default		11	2462	21.630	145.546	30.00
Default	IEEE 802.11n HT40	3	2422	20.580	114.288	30.00
Default		6	2437	20.790	119.950	30.00
Default		9	2452	20.660	116.413	30.00



11. Power Spectral Density

11.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm.


If transmitting antennas of directional gain greater than 6 dBi are used, the power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi

11.2 Test Procedures

According to the methods defined in ANSI C63.10-2020 Section 11.10

- The transmitter output was connected to spectrum analyzer.
- The spectrum analyzer's resolution bandwidth were set at 3kHz RBW and 10kHz VBW as that of the fundamental frequency. Set the sweep time=auto couple.
- The power spectral density was measured and recorded.

11.3 Test Setup Layout




**11.4 Test Result and Data**


Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 3kHz Bandwidth(dBm)	Limit (dBm)
IEEE 802.11b	1	2412	-5.588	8.00
	6	2437	-9.936	8.00
	11	2462	-11.664	8.00
IEEE 802.11g	1	2412	-10.249	8.00
	6	2437	-10.312	8.00
	11	2462	-11.218	8.00
IEEE 802.11n HT20	1	2412	-10.538	8.00
	6	2437	-10.775	8.00
	11	2462	-11.013	8.00
IEEE 802.11n HT40	3	2422	-12.75	8.00
	6	2437	-12.828	8.00
	9	2452	-15.368	8.00




Modulation Type: IEEE 802.11b
CH01

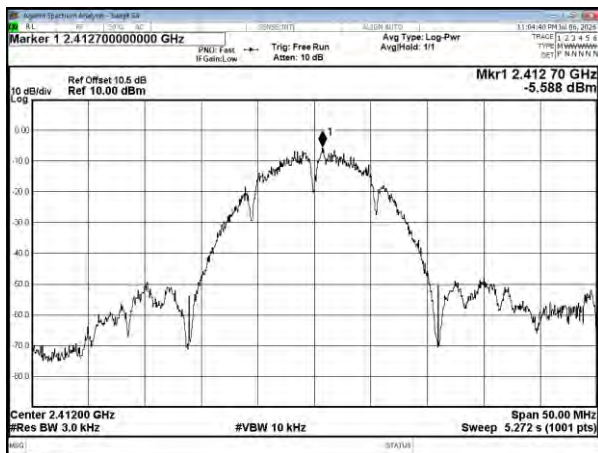


Modulation Type: IEEE 802.11g
CH01

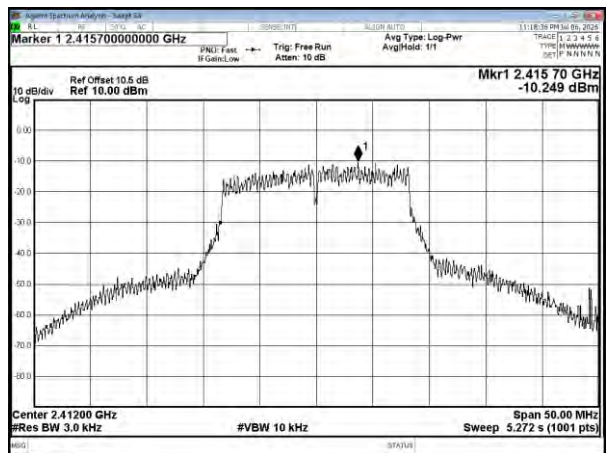


CH06

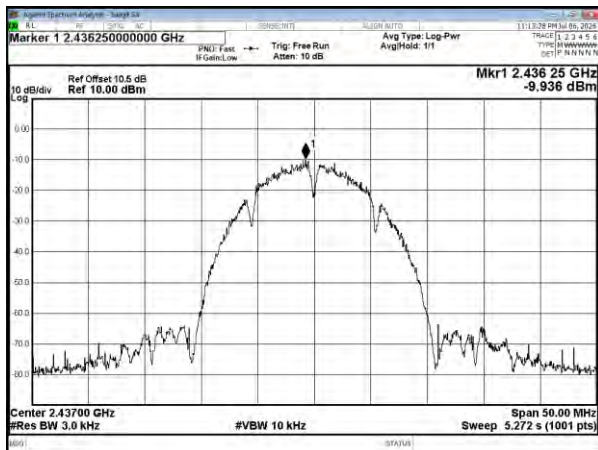


CH06

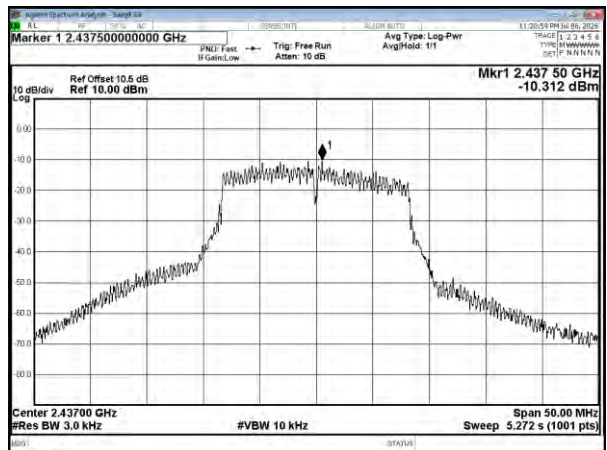

CH11

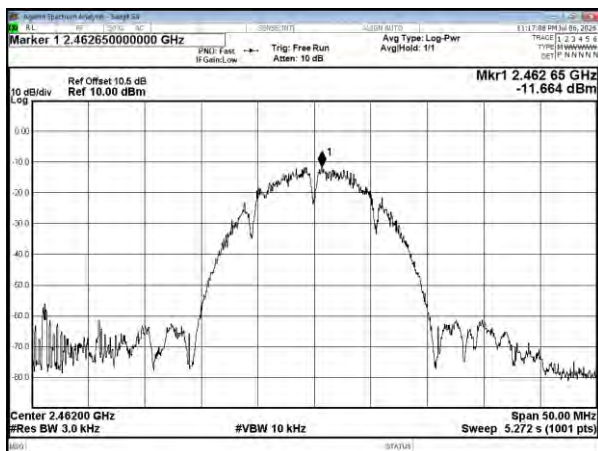


CH11

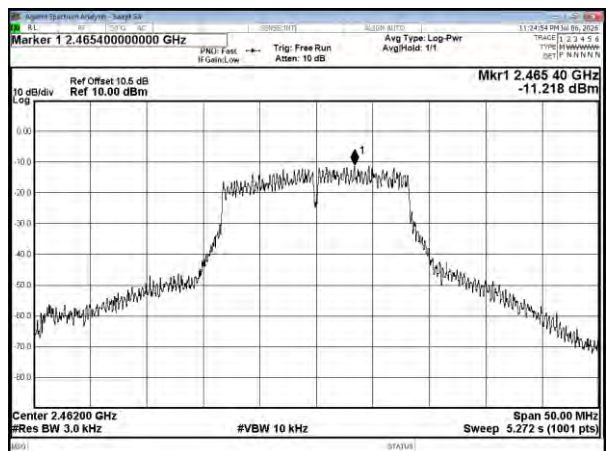





Modulation Type: 802.11n HT20
CH01

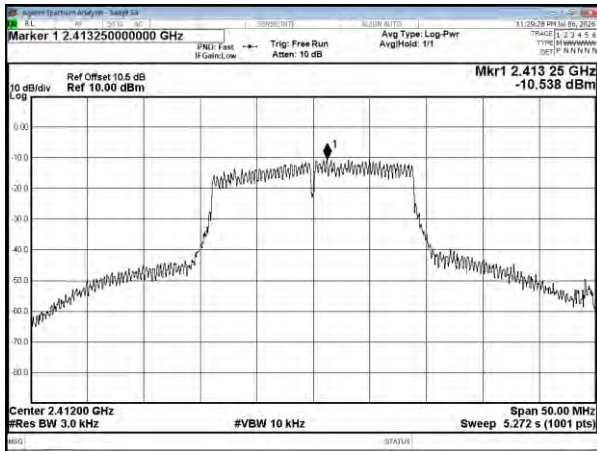


Modulation Type: 802.11n HT40
CH03

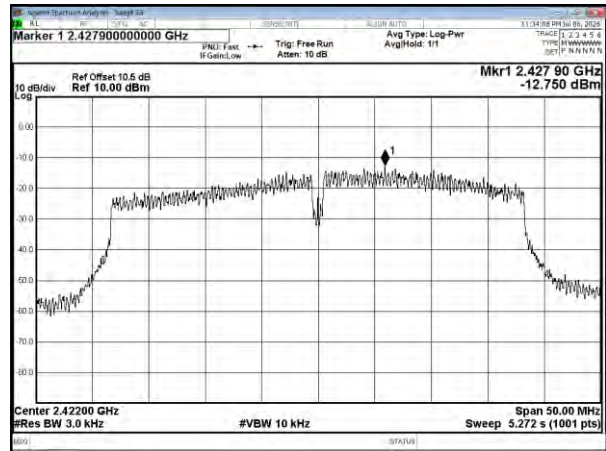


CH06

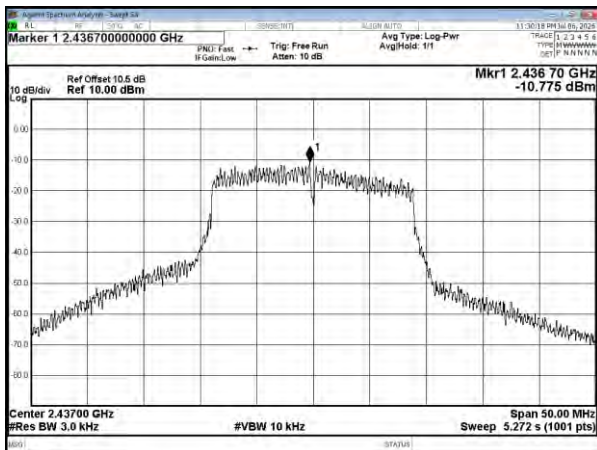


CH06

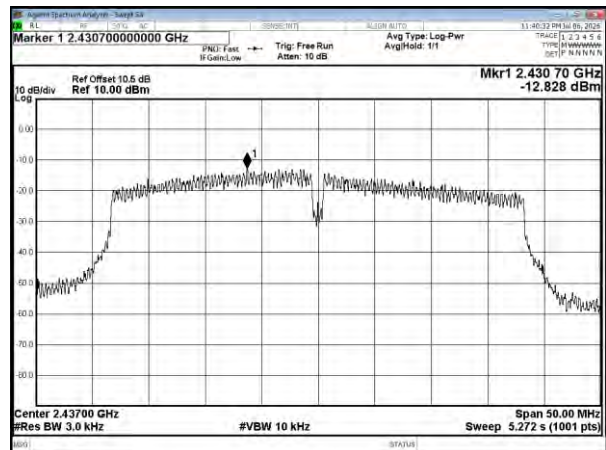

CH11

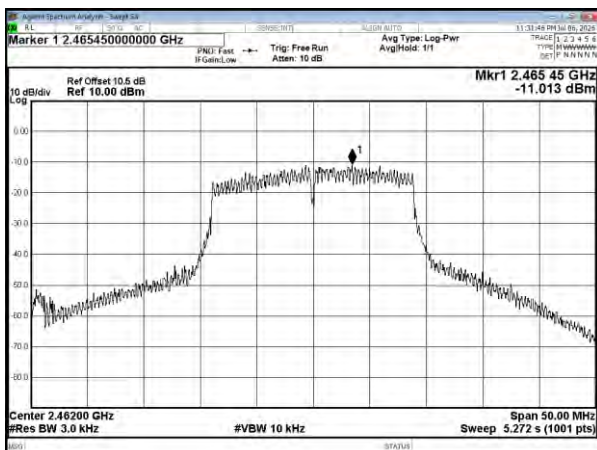

CH09

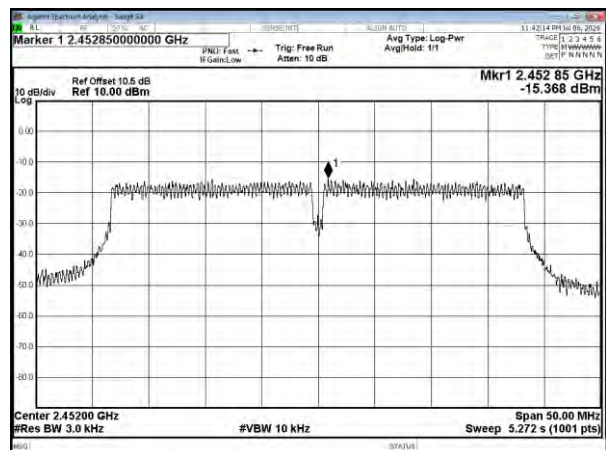

-----THE END OF REPORT-----